SALLY SWANSON
ARCHITECTS, INC.

City of Madera

Americans with Disabilities Act

Self-Evaluation and Transition Plan

Final Copy – 2024

Report Prepared by:

Sally Swanson Architects, Inc.
2600 West Olive Ave, 5th Floor
Burbank, CA 91505

ACKNOWLEDGEMENT

Sally Swanson Architects, Inc. (SSA) would like to thank the City of Madera staff that were very generous with their time and knowledge, without which, this project would not have been possible.

TABLE OF CONTENTS

Acknowledgement 1

TABLE OF CONTENTS 2

SECTION I: EXECUTIVE SUMMARY 4

INTRODUCTION: DEVELOPMENT OF ADA TRANSITION PLAN 4

OVERVIEW: SELF-EVALUATION OF POLICIES, PROCEDURES AND PRACTICES 6

OVERVIEW: ACCESS COMPLIANCE SURVEYS OF FACILITIES 7

Report Production 9

Prioritization Criteria for Barrier Mitigation – Facilities 11

OVERVIEW: ACCESS COMPLIANCE SURVEYS OF THE PUBLIC RIGHTS-OF-WAY 13

Prioritization Criteria for Barrier Mitigation – Public Rights-of-Way 14

OFFICIAL(S) RESPONSIBLE 16

PUBLIC INPUT 18

TRANSITION PLAN IMPLEMENTATION 19

Maintenance of Accessible Features 19

Implementation Policies 20

NOTICE OF COMPLIANCE UNDER ADA & CALIFORNIA STATE LAW 21

ADA GRIEVANCE PROCEDURE 23

SECTION II: APPENDIX

Appendix A: The Americans with Disability Act Self-Evaluation Report 27

Appendix B: Access Compliance Survey Report of Facilities 123

Appendix C: Access Compliance Survey Report of Sidewalks 1,529

Appendix D: Access Compliance Survey Report of Curb Ramps 6,830

Appendix E: Access Compliance Survey Report of Pedestrian Signals 9,733

Appendix F: Prioritization Criteria for Barrier Mitigation – Public Rights-of-Way. 9,885
Appendix G: Prioritization Criteria for Barrier Mitigation – Facilities.....9,905
Appendix H: Public Comments 9,911

SECTION I: EXECUTIVE SUMMARY

INTRODUCTION: DEVELOPMENT OF ADA TRANSITION PLAN

The Americans with Disabilities Act (ADA) of 1990 provides comprehensive civil rights protections to qualified individuals with disabilities in the areas of employment, public accommodations, State and local government services, and telecommunications. A primary goal of the ADA is to ensure equal participation in public life for all Americans with disabilities. Title II of the Act covers programs, services and activities of public entities, such as the City of Madera.

The ADA defines “disability” as:

a. a physical or mental impairment that substantially limits one or more major life activities;

b. having a record of such an impairment; or

c. being regarded as having such an impairment.

If an individual meets any one of these tests, they are considered to be an individual with a disability for purposes of the ADA.

Under Title II, a public entity may not deny the benefits of its programs, services, and/or activities to individuals with disabilities by maintaining inaccessible facilities, which house these programs, services and activities. The City's programs, services, and activities, when viewed in their entirety, must be made accessible to and usable by individuals with disabilities, except where to do so would result in a fundamental alteration in the nature of the program; result in undue financial and administrative burdens or threaten or destroy the historic significance of a historic property.

Section §35.150 requires that each program, service or activity conducted by a City, when viewed in its entirety, be readily accessible to and usable by individuals with disabilities. The regulation makes clear, however, that a City is not required to make each of its existing facilities accessible (§35.150(a)(1)). Unlike Title III of the ADA, which requires public accommodations to remove architectural barriers where such removal is "readily achievable," or to provide goods and services through alternative methods, where those methods are "readily achievable," Title II requires a City to make its programs accessible in all cases, except where to do so would result in a fundamental alteration in the nature of the program or in undue financial and administrative burdens. The US Congress intended the "undue burden" standard in Title II to be significantly higher than the "readily achievable" standard in Title III. Thus, although Title II may not require removal of barriers in some cases where removal would be required under Title III, the program access requirement of Title II should

enable individuals with disabilities to participate in and benefit from the programs, services or activities of cities in all but the most unusual cases.

To comply with the Title II requirements for accessibility to City *programs, services and activities*, this Transition Plan:

- Identifies physical obstacles in the public entity's Public Rights-of-Way that limit the accessibility of its programs or activities to individuals with disabilities;
- Assesses the extent of architectural barriers to program accessibility in the public rights-of-way and within the buildings, parks and other facilities operated by the City;
- Describes in detail the methods that will be used to make the Public Rights-of-Way accessible;
- Estimates costs for mitigation solutions;
- Specifies the steps necessary to achieve compliance;
- Provides a schedule for barrier removal/mitigation;
- Sets priorities for barrier elimination; and
- Indicates the official responsible for implementation of the plan.

OVERVIEW: SELF-EVALUATION OF POLICIES, PROCEDURES AND PRACTICES

In addition to identifying and modifying physical barriers, Title 28 CFR Part 35, ***Non-Discrimination on the Basis of Disability in State and Local Government Services***, requires that a public entity evaluate its policies, procedures and practices. The following outlines the City's Self-Evaluation:

- Evaluate City policies, procedures, and practices as they pertain to its programs, services and activities; and make the necessary modifications to those policies and practices that do not meet the programmatic requirements of Title II of the ADA
- Provide an opportunity to interested persons, including individuals with disabilities or organizations representing individuals with disabilities, to participate in the Self-Evaluation process by submitting comments
- Maintain, file and make available for public inspection a list of interested persons consulted, a description of areas examined, and any problems identified, and a description of any modifications made

It is recommended that the City periodically evaluate such policies, procedures and practices pertaining to communication, auxiliary aids and services, emergency response, publications, determination for undue burden, public activities, employment, and new construction of facilities, in addition to physical accessibility to City facilities.

It is also recommended that for program barrier mitigation, a detailed outline of administrative requirements and detailed requirements of needed policies be included. The policy outline would serve as a guideline upon which the City's future policies may be built.

OVERVIEW: ACCESS COMPLIANCE SURVEYS OF FACILITIES

The ADA Transition Plan is used to document physical accessibility barriers to the City's programs, services, and activities and to outline a schedule / plan (or the basis to produce one) for which the City shall follow to transition from a state of noncompliance to compliance.

The access compliance surveys of City owned and leased facilities fulfill a portion of the first two requirements of an ADA Transition Plan by identifying existing building conditions that deviate from current State and Federal standards for new construction and providing detailed description of proposed solutions for barrier mitigation. For each barrier, the surveys outline the code deviations and requirements from the Americans with Disabilities Act Accessibility Guidelines (ADAAG), ADA Standards for Accessible Design (ADAS) and the Accessibility Standards in the California Building Standards Code (CBC).

The access compliance surveys of City facilities cover approximately 39-owned and leased facilities maintained by the City. The surveys identified approximately 2,284 different accessibility related barriers within the City facilities and that the financial cost to mitigate all barriers identified in the surveys to be approximately $14.6 million.

Number of Facilities Surveyed	Number of Accessibility Barriers	Total Cost Estimated ($)
39	2,284	$14,599,254

The City facilities that were surveyed are shown in the table below:

Facility Number	Facility Name	Address	City, State, ZIP
1	City Hall	205 W. 4th Street	Madera, CA 93637
2	Frank Bergon Senior Center	238 S. D Street	Madera, CA 93638
3	Corporation Yard	1030 S. Gateway Drive	Madera, CA 93637
5	Fire Station 56	317 N. Lake Street	Madera, CA 93638
7	Fire Station 57	200 S. Schnoor	Madera, CA 93637
8	McNally Park	825 South A Street	Madera, CA 93638
102	Old Train Depot	120 N. E Street	Madera, CA 93638

117C	Police Department	330 South C Street	Madera, CA 93638
121	Rotary Park	800 N. Gateway Drive	Madera, CA 93637
122	Madera Sunrise Rotary Sports Complex	1901 Clinton Street	Madera, CA 93638
126	Centennial Park	701 E. 5th Street	Madera, CA 93638
133	Lions Town & Country Park Community	2300 Howard Road	Madera, CA 93637
135	Development Offices	428 E. Yosemite Avenue	Madera, CA 93638
139	Pan-Am Park	703 E. Sherwood Way	Madera, CA 93638
15	Millview Gymnasium	1901 Clinton Street	Madera, CA 93638
15A	Senior Nutrition Kitchen	1901 Clinton Street	Madera, CA 93638
181	Transit Center	1951 Independence Drive	Madera, CA 93637
182	Fire Station 58	2558 Condor Drive	Madera, CA 93637
23	Madera Municipal Airport	4020 Aviation Drive	Madera, CA 93637
26	Centennial Park Swimming Pool	221 Flume Street	Madera, CA 93638
39	Wastewater Treatment Plant	13048 Road 21 1/2	Madera, CA 93637
48	Madera Municipal Golf Course	23200 Avenue 17	Madera, CA 93637
50	Intermodal Facility	123 North E Street	Madera, CA 93638
51	Parks Maintenance Office	40 W. Olive	Madera, CA 93637
56	Westside Community Center	1124 W. Yosemite Avenue	Madera, CA 93637
56A	Rotary Youth Hut	113 South Q. Street	Madera, CA 93637
58	Mexican-American Center	716 Columbia Ave	Madera, CA 93638
60	Pan-Am Community Center	703 E. Sherwood Way	Madera, CA 93638
P1	Community Garden	621 E. 4th Street	Madera, CA 93638

P10	Sunset Park	Sunset Ave. and Accomero St.	Madera, CA 93637
P11	Vernon McCullough Fresno River Trail	Along Fresno River	Madera, CA 93638
P2	Granada Linear Park	Granada Ave. btw Glade and Cleveland	Madera, CA 93637
P3	Knox Park	Corner of Knox and A Streets	Madera, CA 93638
P4	Laurel Trail	701 E. 5th St.	Madera, CA 93638
P5	Maple Court	T-Intersection of Maple Court and Maple St.	Madera, CA 93637
P6	Olive Outlots	Olive Avenue and Grove St.	Madera, CA 93637
P7	Riverside Park	Riverside Drive, between N. D St. and Lake	Madera, CA 93638
P8	Riverview	North side of Riverview Dr., west of Hwy 99	Madera, CA 93637
P9	Sharon Avenue Linear Park	Sharon Ave., between Cleveland and Riverside	Madera, CA 93638

Report Production

The following information contains the minimum data included in the Transition Plan – Access Compliance Survey Reports:

- Item number of barrier and/or room numbers, corresponding to schematic site and floor plans
- Area/location of the barrier; for example, room name or number
- Description of the barrier (as-built situation)
- As-is measurement/dimension
- Method of mitigation (e.g. physical alteration, purchase, program modification, equivalent facilitation, etc.)
- Detailed description of proposed solution and, if applicable, an alternative or interim solution

- Code citations, specifying the applicable sections in the State accessibility regulations, and in the Federal standards
- Severity of individual barriers (four levels: 1=severe, 2=moderate, 3=mild 4=minor)
- Unit and estimated unit price
- Total estimated cost for barrier removal
- Special site conditions (if applicable)

The information obtained from the surveys of the City facilities is maintained on a Microsoft Excel spreadsheet database.

Access Compliance Survey Reports are contained in Section II: Appendix.

SEE Appendix B: Access Compliance Survey Report of Facilities

Prioritization Criteria for Barrier Mitigation – Facilities

The third requirement of an ADA Transition Plan is to create a schedule that the City shall follow which addresses the order in which barriers shall be mitigated. This schedule shall be a public document and shall be made available for public inspection, maintained, and updated for the duration of the Transition Planning period. The maintaining and updating of this document shall mark the City's good-faith efforts in transitioning from a state of noncompliance to compliance regarding the ADA.

The difficulty and complexity of creating a schedule is recognized. Therefore, to provide a methodology for creating a schedule, a prioritization criterion was formed to rank barriers in order of most important to mitigate first to least important. The prioritization criteria rates each barrier based on two factors, its Priority Score, and its Severity Score. The Priority Score ranks the relative importance of addressing the barrier based on its locational impact on the disabled population, and the Severity Score ranks the barrier based on the degree of deviation exhibited compared to applicable access standards.

Overall Prioritization Criteria according to programmatic functions:

- Importance of the program function
- Frequency of Use
- Program location and relation to other programmatic functions
- Future Projects

Since persons with disabilities utilize certain facilities with greater frequency than other facilities, the impact of barriers identified at those facilities was deemed to be greater. Upon compilation of the survey results, prioritization criteria were determined for barriers identified in the survey and additional information was obtained to determine a final level of prioritization.

Prioritization Criteria according to barrier location:

Priority can be further divided within any one facility depending on the function of the area within the facility being surveyed. Typically, these areas are divided into 4 general priorities.

The prioritization criteria can be used to sort the access barriers identified in the surveys and create a schedule that order barrier mitigation work starting from barriers of highest importance to barriers of least importance.

SEE Appendix G: Prioritization Criteria for Barrier Mitigation – Facilities

Additional Consideration: Age of the Facility

The age of the facility can also determine the City's obligations to meet ADA compliance. Facilities built before September 15, 2010 are obligated to be in compliance with the 1991 ADAAG, barring that the building has not gone through major reconstruction or alteration henceforth that date. The facility will also be required to comply with the applicable California Building Codes (CBC) at the time of construction.

If a facility was constructed or altered between the transition period of September 15, 2010 through March 15, 2012, an option of choosing either the 1991 ADA or 2010 ADA Standards were allowed.

Facilities built after March 15, 2012 are required to meet the updated 2010 ADA Standards as well as the California Building Code (CBC) at time of construction.

The caveat being that crucial program functions and services must be provided in accessible locations.

Compliance Date for New Construction or Alterations	**Applicable Standards**
Before September 15, 2010	1991 Standards or UFAS
On or after September 15, 2010, and before March 15, 2012	1991 Standards, UFAS, or 2010 Standards
On or after March 15, 2012	2010 Standards

OVERVIEW: ACCESS COMPLIANCE SURVEYS OF THE PUBLIC RIGHTS-OF-WAY

Barden v. City of Sacramento, 292 F. 3d 1073 established that sidewalks and intersections constitute a service, program, or activity provided by a City, therefore they are subject to accessibility regulations and should be addressed as part of the City's ADA Transition Plan.

Four different features provided in the PROW were surveyed, including sidewalks, curb ramps, and pedestrian signals. Curb ramps, pedestrian signals and bus stops were surveyed using a data collection checklist, based on Accessibility Standards in the California Building Standards Code (CBC), Americans with Disability Act (ADA), Manual on Uniform Traffic Control Devices (MUTCD) and US Department of Transportation (USDOT) requirements as well as Public Rights-of-Way Accessibility Guidelines (PROWAG) recommendations. Traditional measuring and smart-level equipment were used to collect measurements for these surveys. Sidewalks were surveyed using sidewalk profilers that were developed for the Federal Highway Administration (FHWA) and adapted for sidewalk ADA surveys. The device captures information on slopes, and surface variations and identifies deviations from the required ADA standards and other applicable requirements.

The access compliance surveys of the Public Rights-of-Way (PROW), along with the surveys of City owned and leased facilities, completely fulfill the first two requirements for an ADA Transition Plan. As a part of this effort, approximately 186 miles of sidewalk, 4,453 curb ramps, and 293 pedestrian signals were surveyed for access compliance and that the financial cost to mitigate all barriers identified in the surveys to be approximately $320 million.

Features	**Total Number Surveyed**	**Number ADA Compliant**	**Total Cost Estimate ($)**
Sidewalks	185.6 miles	10 miles	$299,683,125
Curb Ramps	4,453 curb ramps	76 curb ramps	$19,209,500
Pedestrian Signals	293 pedestrian signals	0 pedestrian signals	$1,484,850
TOTAL			**$320,377,475**

The information obtained from the surveys of the PROW is maintained on a geographic information system (GIS) database.

Access Compliance Survey Reports are contained in Section II: Appendix.

SEE Appendix C: Access Compliance Survey Report of Sidewalks

SEE Appendix D: Access Compliance Survey Report of Curb Ramps

SEE Appendix E: Access Compliance Survey Report of Pedestrian Signals

Prioritization Criteria for Barrier Mitigation – Public Rights-of-Way

The third requirement of an ADA Transition Plan is to create a schedule that the City shall follow which addresses the order in which barriers within each feature shall be mitigated. This schedule shall be a public document and shall be made available for public inspection, maintained, and updated for the duration of the Transition Planning period. The maintaining and updating of this document shall mark the City's good-faith efforts in transitioning from a state of noncompliance to compliance regarding accessibility.

The difficulty and complexity of creating a schedule is recognized. Therefore, to provide a methodology for creating a schedule, like City owned and leased facilities, a prioritization criterion was formed, catered to the in-depth information that is provided utilizing GIS.

The relative importance of each barrier, according to its impact upon the disabled population was taken into account when developing the prioritization criteria for barrier mitigation.

Overall Prioritization Criteria according to programmatic functions:

- Importance of the program function
- Frequency of Use
- Program location and relation to other programmatic functions

Since persons with disabilities utilize certain facilities with greater frequency than other facilities, the impact of barriers identified at those facilities was deemed to be greater. Upon compilation of the survey results, prioritization criteria was determined for barriers identified in the survey and additional information was obtained to determine a final level of prioritization.

The general policy includes the continuous effort of providing connection to existing pedestrian facilities where sidewalk segments are missing.

Prioritization Criteria for PROW according to barrier location:

- Government Services
- City Attractors (City Owned/Leased Facilities)
- Schools
- Parks

- Transit Stops/Centers
- Population Density
- Streets (Arterials, Collectors)

The prioritization criteria developed for the PROW rates the relative importance of each barrier based on a combination of rating the activity occurring at the barrier's location, or "Activity Score", as well as rating the severity from which each feature deviates from current State and Federal standards, or "Barrier Score". Each score is rated on a scale of 0 to 100, with 0 being the lowest, and 100 being the highest.

The combination of both the "Activity Score" and "Barrier Score" creates an overall "Priority Score" that can be used to sort features identified in the surveys and create a schedule that orders barrier mitigation work starting from features of highest priority to features of lowest priority. The "Priority Score" is rated on a scale of 0 to 200, with 0 being the lowest priority, and 200 being the highest priority.

SEE Appendix F: Prioritization Criteria for Barrier Mitigation – Public Rights-of-Way

OFFICIAL(S) RESPONSIBLE

The ADA requires that an official be identified as responsible for the implementation of the Entity's plan.

It is the US DOJ's view that compliance with 28 CFR 35.150(a), like compliance with the corresponding provisions of the section 504 regulations for public programs, would in most cases not result in undue financial and administrative burdens on a typical City. In determining undue financial and administrative burdens, all City resources available for use in the funding and operation of City services, programs and activities would need to be considered.

The burden of proving that compliance with paragraph (a) of 28 CFR 35.150 would either fundamentally alter the nature of a service, program, or activity OR would result in undue financial and administrative burdens rests with the City. The decision that compliance would result in such alteration and/or burden must be made by the head of the public entity or their designee and must be accompanied by a written statement of the reasons for reaching that conclusion.

While the US DOJ has acknowledged the difficulty/complexity of not only making such a determination, but also identifying the official responsible to make this decision/determination, the department's intention is clear in that the determination must be made by a high-level official, no lower than a Department head, having budgetary authority and responsibility for making spending decisions.

The City of Madera designates the City Manager as the Manager of EEO/Disability Compliance and as the Official responsible for the implementation of its ADA Transition Plan. They can be contacted as follows:

Arnoldo Rodriguez
City Manager
City of Madera, Administration
205 W. 4th Street
Madera, CA 93637
(559) 661-5402

The Official responsible for the designation and management of financial resources to support implementation should be able to seek/acquire funding for ADA barrier removal work over the City's Transition Planning period. The City of Madera Director of Financial Services will be responsible for effectively controlling the City's budget line item(s) for the ADA Transition Planning budget. As such, the City of Madera will designate the Director of Financial Services as the Official responsible for financial resources in support of plan implementation. They can be contacted as follows.

Michael Lima
Director of Financial Services
City of Madera, Finance Department
205 W. 4th Street
Madera, CA 93637
Phone: (559) 661-5453

Typically, the responsibility of making any City program, service or activity accessible to all persons, regardless of ability, rests with the official who controls the operating funds for that particular program, service or activity. To this end, the task of seeking/getting approval for funds from the governing body to make the said program accessible lies with the official responsible for the program.

Indication of the official(s) responsible for implementation of the plan fulfills the final requirement of a Transition Plan. To this end, individual department directors are expected to identify and pursue opportunities to seek funds in support of program accessibility. Said individuals are listed below:

Name	**Department**	**Phone Number**
Arnoldo Rodriguez	Administration	(559) 661-5402
Alicia Gonzales	City Clerk	(559) 661-5409
Will Tackett	Community Development	(559) 661-5451
Mike Lima	Finance	(559) 661-5453
Giachino Chiaramonte	Police	(559) 675-4201
Wendy Silva	Human Resources	(559) 661-5481
Keith Helmuth	Engineering	(559) 661-5423
Rafael Magallan	Building	(559) 661-5446
Planning Manager (vacant)	Planning	(559) 661-5433
Public Works Operations Director (vacant)	Public Works	(559) 662-4936
Joseph Hebert	Parks & Community Services	(559) 661-5491
Gary Price	Information Technology	(559) 661-5411

PUBLIC INPUT

Per 28 Code of Federal Regulations, Part 35; Subpart D – Program Accessibility; §35.150 – Existing Facilities; (d) Transition Plan (1): The City shall provide an opportunity to interested persons, including individuals with disabilities or organizations representing individuals with disabilities, to participate in the development of the ADA Self-Evaluation and Transition Plan by submitting comments.

In order to satisfy this requirement and to gain the perspective of persons with disabilities, a public vetting was held by the City on June 18th, 2024, where members of the public were invited to comment on and participate in the City's Draft ADA Self-Evaluation & Transition Plan.

SEE Appendix H: Public Comments

TRANSITION PLAN IMPLEMENTATION

The document should be maintained and updated for the duration of the Transition Planning period and a copy of the Transition Plan shall be made available for public inspection.

The final product is a working document to be modified as barriers are removed or alterations are made, open to modification throughout the transition period. The Official(s) responsible and project managers overseeing the barrier-removal projects will document all such ADA improvements/upgrades. Also as part of this process, technical infeasibility, if any, to meet necessary accessibility compliance will be documented and filed for the City's records by the Engineer-of-Record on the said project. It is also recommended to provide accessibility site audits (inspections) of on-going projects as part of the project close-out/certification. This documentation and verification of barrier-mitigation will be integrated into the City's ADA Transition Plan on a regular basis to ensure that barriers are "checked-off" and the Plan is current with a record of barrier-mitigation work. Annual reports of barrier-mitigation work may also be provided to the City's Board of Supervisors.

Maintenance of Accessible Features

The Maintenance of accessible features is mandated by State and Federal Regulations and is an integral part of the City's plan to transition into a more accessible destination. Both, Chapter 28 Code of Federal Regulation, Part 35, Section 35.133 as well as the California Building Code section 1101B.3 – Maintenance of accessible features, state:

1. A public accommodation shall maintain in operable working condition those features of facilities and equipment that are required to be accessible to and usable by persons with disabilities.

2. This section does not prohibit isolated or temporary interruptions in service or access due to maintenance or repairs.

Both these sections provide that a public entity shall maintain in operable working condition those features of the Public Rights-of-Way that are required to be accessible to and usable by persons with disabilities. They require that, to the maximum extent feasible, Public Rights-of-Way must be accessible to, and usable by, individuals with disabilities. These sections recognize that it is not sufficient to provide features such as accessible routes, ramps, or curb ramps, if those features are not maintained in a manner that enables individuals with disabilities to use them. Excessive slopes on curb ramps, are neither "accessible to" nor "usable by" individuals with disabilities.

It is, of course, impossible to guarantee that mechanical devices will never fail to operate. As such, the 2nd paragraph provides that this section does not prohibit isolated or temporary interruptions in service or access due to maintenance or repairs. This paragraph is intended to clarify that temporary obstructions or isolated instances of mechanical failure would not be considered violations of the ADA or this part. However, allowing obstructions or "out of service" equipment to persist beyond a reasonable period of time would violate this part, as would repeated mechanical failures due to improper or inadequate maintenance. Failure of the public entity to arrange prompt repair of curb ramps or other equipment intended to provide access would also violate this part.

A City-wide formal policy specifically addressing the legal requirements (28CFR Part 35.133 & CBC1101B.3) of maintaining accessible features would be of long-term benefit to the City. When, over time, an accessible feature fails, institutionalizing organizational commitments towards protocols and maintenance ensures an appropriate action is taken.

Implementation Policies

The City of Madera is committed to fostering equity by actively remediating ADA barriers, ensuring accessible and inclusive environments for all of its residents. The City proposes the following implementation priorities for transition of its facilities and public rights-of-way into compliance with the ADA.

Any grievances submitted to the [Client] will be ranked according to the implementation priorities listed below to determine the time frame in which to address the grievance.

Priority 1: High Pedestrian Traffic Areas and Risk Reduction. Focus on making modifications in areas that see heavy traffic and where reducing potential risks to individuals with disabilities is crucial. This ensures safe and accessible pathways for all users.

Priority 2: Sites Lacking ADA Access. Identify and eliminate obstacles at locations currently without any ADA-compliant access, ensuring that entrances, passageways, and services are accessible to everyone, including individuals with mobility, vision, or hearing impairments.

Priority 3: City of Madera Facilities. Implement changes withinCity-owned facilities to address and remove existing barriers. This includes making sinks wheelchair accessible, redesigning parking lots to include adequate accessible parking spaces, and ensuring that access routes are clear and unobstructed.

NOTICE OF COMPLIANCE UNDER ADA & CALIFORNIA STATE LAW

In accordance with the requirements of Title II of the Americans with Disabilities Act (ADA) of 1990, the Americans with Disabilities Amendments Act of 2008, the Fair Employment & Housing Act (FEHA), California Government Code Section 11135 and other applicable codes, the City does not discriminate against individuals on the basis of disability in its services, programs or activities.

Employment: The City does not discriminate on the basis of disability in its hiring or employment practices and will comply with the Fair Employment and Housing Act, as well as Title I of the ADA, including the regulations promulgated by the U.S. Equal Employment Opportunity Commission (EEOC), including the requirement to provide reasonable accommodations.

Effective Communication: The City will generally, upon request, provide appropriate aids and services leading to effective communication for qualified person(s) with disabilities, including sign language interpreters, documents in Braille and other alternate formats to ensure information and communication is accessible to people who have speech, hearing, vision, or cognitive impairments so they can participate equally in the programs, services and activities.

Modification to Policies and Procedures: The City will make reasonable modifications to policies and programs to ensure that people with disabilities have an equal opportunity to participate in all of its programs, services and activities. *For example, individuals with service animals behaving within applicable standards are welcome in offices and City facilities, even when pets are generally prohibited.*

Anyone who requires auxiliary aids and services for effective communication, or a modification of policies or procedures to participate in a program, service or activity in the City should communicate with the responsible Department contact as soon as possible, but no later than **48 hours** before the scheduled event.

Neither the ADA, nor State law requires the City to take action that would fundamentally alter the nature of its programs, activities or services or impose an undue financial or administrative burden. Complaints that a program, activity or service of the City is not accessible should be directed to the **ADA Coordinator:**

Wendy Silva
Director of Human Resources
Human Resources
205 West 4th Street, Madera, CA 93637
Phone: (559) 661.5481
wsilva@madera.gov

The City does not place a surcharge on a particular individual with a disability or a group of individuals with disabilities to cover the cost of providing auxiliary aids and services or making a reasonable modification to a policy to create access.

ADA GRIEVANCE PROCEDURE

City of Madera ADA Grievance Procedure

Grievance Procedure under ADA and California State Disability Rights Laws

This grievance procedure is established to meet the requirements of the Americans with Disabilities Act of 1990 ("ADA"), the Americans with Disabilities Amendments Act (ADAAA) and California State law. It may be used by anyone wishing to file a complaint alleging discrimination on the basis of disability in the provision of services, activities, programs or benefits by the City of Madera. The City's Disability Discrimination Policy governs employment-related complaints of disability discrimination.

1. The complaint should be in writing and contain information about the alleged discrimination such as name, address, phone number of the complainant and location, date and a description of the problem(s). The City's Grievance Procedure form is available online at https://www.madera.gov/home/departments/human-resources/ada-advisory-council/. Alternative means of filing a complaint, such as personal interviews or a tape recording of the complaint, are available to persons with disabilities upon request.
2. The complaint should be submitted by the grievant and/or his/her designee as soon as possible, but no later than 60 calendar days after the alleged violation to the City's ADA Coordinator. The contact information is:

Wendy Silva, Director of Human Resources
205 W. 4th Street
Madera, CA 93637
Phone: (559) 661-5400, option 8
Email: hrinfo@madera.gov

3. An investigation, as may be appropriate, shall follow the filing of a complaint. The appropriate investigation will be conducted by the ADA Coordinator or a designated representative. These rules contemplate an informal but thorough investigation affording all interested persons an opportunity to submit evidence relevant to a complaint. Under 24 CFR 8.53, the City need not process complaints from applicants for employment or housing. Such complaints will be referred to the California Civil Rights Department.
4. A written determination as to the validity of the compliant and a description of resolution, if any, shall be issued by the ADA Coordinator and a copy forwarded to the complainant no later than 30 calendar days after its filing.
5. The complainant may appeal the ADA Coordinator's decision to the City Manager within 10 calendar days of receipt of the decision. The City Manager will review the

decision and within 30 days provide the complainant with a written response to the appeal.

6. The complainant may appeal the decision of the City Manager by filing an appeal with the City Council. All such appeals must be submitted within 10 days of the complainant's receipt of the decision from the City Manager. Such appeals will be heard by the City of Madera ADA Advisory Council at its next regularly scheduled meeting. The City of Madera ADA Advisory Council will make findings and recommendations in writing regarding the complaint and appeal, and such findings and recommendations will be forwarded to the City Council at its next regularly scheduled meeting for which an agenda has not already been published. The City Council will consider the findings and recommendations of the City of Madera ADA Advisory Council and make a final decision regarding the complaint and the matter will be closed. The City Council's decision will be provided in writing to the complainant within 10 calendar days after the matter is heard at a public meeting.

SECTION II: APPENDIX

A. The Americans with Disabilities Act Self-Evaluation Report

B. Access Compliance Survey Report of Facilities

C. Access Compliance Survey Report of Sidewalks

D. Access Compliance Survey Report of Curb Ramps

E. Access Compliance Survey Report of Pedestrian Signals

F. Prioritization Criteria for Barrier Mitigation – Public Rights-of-Way

G. Prioritization Criteria for Barrier Mitigation – Facilities

H. Public Comments

APPENDIX A: THE AMERICANS WITH DISABILITY ACT SELF-EVALUATION REPORT

APPENDIX A - The Americans with Disabilities Act

Self-Evaluation Report for the

City of Madera

Report Prepared by:

Sally Swanson Architects, Inc.
100 Bush Street Suite 1625
San Francisco, CA 94104
Tina Dorius, Esq., ADA Policy Specialist

SALLY SWANSON
ARCHITECTS, INC.

Table of Contents

Table of Contents 2

I. PROJECT OVERVIEW 6

A. Acknowledgments 6

B. Introduction 6

C. Background Information Regarding the Americans with Disabilities Act and California State Law 7

1. Purpose of the Americans with Disabilities Act 7

2. Overview of Disability Civil Rights Laws Impacting the City 7

3. ADA Self-Evaluation Requirements 8

4. Who is a Qualified Person with a Disability? 8

D. Scope of the Self-Evaluation 9

E. Self-Evaluation Method of Review 10

F. ADA Transition Plan Requirements 10

G. How This Report is Organized & To Be Utilized 11

II. SURVEY RESPONSES AND RECOMMENDATIONS 12

A. Printed Communications 12

1. Recommendations 12

2. Survey Responses & Findings 13

B. Communication with People Who Are Deaf or Hard of Hearing 15

1. Recommendations 15

2. Survey Responses & Findings 16

C. Software and Digital Communication 18

1. Recommendations 18

2. Survey Responses & Findings 19

D. Staff & Employees 22

1. Recommendations 23

2. Survey Responses & Findings 23

E. Purchasing, Contracts, Vendors 28

1. Recommendations 29

2. Survey Responses & Findings 29

F. Construction & Remodels 31

1. Recommendations 31
2. Survey Responses & Findings 32
G. Facilities & Real Estate Management 33
1. Recommendations 33
2. Survey Responses & Findings 33
H. Planning, Construction & Buildings 34
1. Recommendations 34
2. Survey Responses & Findings 35
I. Fleet Services 35
1. Recommendations 35
2. Survey Responses & Findings 35
J. Public Meetings 35
1. Recommendations 36
2. Survey Responses & Findings 36
K. Emergency Procedures 41
1. Recommendations 41
2. Survey Responses & Findings 42
L. Records 43
1. Recommendations 43
2. Survey Responses & Findings 43
M. Capital Projects 43
1. Recommendations 43
2. Survey Responses & Findings 44
N. General Purchases 44
1. Recommendations 44
2. Survey Responses & Findings 44
O. Information Technology 46
1. Recommendations 46
2. Survey Responses & Findings 46
P. General 46
1. Recommendations 46
2. Survey Responses & Findings 46
Department-Specific Accessibility Survey Responses 48

1. Police Department 48
A. Recommendations 48
B. Survey Responses & Findings 49
2. Information Services 50
A. Recommendations 50
B. Survey Responses & Findings 50
Q. Requested Trainings 50
R. Vetting of Self-Evaluation Results 50
S. Staff Who Contributed to this ADA Self-Evaluation 52
T. Work Plan for the Self-Evaluation Implementation 52
APPENDICES 54
Appendix A: 28 CFR 35.105 Self-Evaluation. 54
Appendix B: California Government Code Section 11135 55
Appendix C: California Government Code Section 12926 56
Appendix D: Sample Notice of Compliance Under ADA & California State Law 65
Appendix E: Sample Grievance Procedure 67
Appendix F: City of Madera Grievance Form 69
Appendix G: City of Madera ADA Coordinator 71
Appendix H: Self-Evaluation Survey Questions 72
Printed Communications 72
Communication With People Who are Deaf or Hard of Hearing (DHH) 72
Software & Digital Communication 74
Staff & Employees 75
Information Technology 78
Purchasing, Contracts, Vendors 78
Construction and Remodels 79
General Purchases 79
Facilities and Real Estate Management 80
Planning, Construction, Buildings 81
Capital Projects 82
Public Meetings 82
Emergency Procedures 86
Custody 86

Records 88
Other 88
Appendix I: List of documents appended to survey responses 91
Appendix J: Glossary of Terms and Basic information 92

I. PROJECT OVERVIEW

A. Acknowledgments

Sally Swanson Architects, Inc., (SSA), would like to thank all participating staff at the City of Madera. Without their coordination and the individual Departmental contributions, this project would not have been possible.

B. Introduction

Madera is a city in California and the county seat of Madera County. According to a July 1, 2019, estimate by the US Census Bureau, the city's population is 65,860. The town was named after the Spanish term for lumber, and, from 1876 to 1931, a 63-mile water flume carried lumber from the mountains to Madera where the lumber was shipped by train. Landmarks include the historic Madera County Courthouse, the notable Madera water tower, and a fully operational drive-in movie theater.

The Americans with Disabilities Act (ADA) Title II mandates that covered entities, such as the City of Madera, conduct a Self-Evaluation, create a Transition Plan, appoint an ADA Coordinator, and develop a Grievance Procedure and an ADA Notice of Compliance. To meet this obligation, and to create a path forward toward total accessibility, the City has contracted with Sally Swanson Architects, Inc. (SSA) to assist with meeting (ADA) Title II mandates.

This document presents only the ADA Self-Evaluation. This evaluation provides a comprehensive report outlining a review of the City’s programs, services, and activities.

Results of the survey and analysis identify programmatic and administrative barriers to programs and are contained herein.[1]

C. Background Information Regarding the Americans with Disabilities Act and California State Law

1. Purpose of the Americans with Disabilities Act

Passed in 1990, the Americans with Disabilities Act (ADA) is one of the most comprehensive civil rights laws in the nation. It provides protection to an estimated fifty-seven million Americans in: employment (Title I); receipt of programs, services, and activities from State and local government (Title II); the receipt of goods and services from private businesses (Title III); and telecommunications (Title IV). In 2008, the Americans with Disabilities Act Amendment Act (ADAAA) was passed. The ADAAA gives guidance to the courts regarding who has standing under ADA. The result has been an increasing number of people who are now able to bring ADA claims in Federal Court.

2. Overview of Disability Civil Rights Laws Impacting the City

The City of Madera is covered by the ADA Title II, ADAAA of 2008, the Rehabilitation Act of 1973, and California Government Codes 11135 and 12926. All contractual activities are also covered by California Government Code 4450. Employment programs are covered by the ADA (Title I), the ADAAA and California Government Code 12926. When comparing State and Federal law, it is mandated that

[1] The City of Madera's Transition Plan, focused on physical barriers to access, is also a part of this project and provided as a separate document.

the most stringent law be applied to create the maximum amount of access for people with disabilities. Thus, the most stringent standards were applied to the evaluation reported in this document.

3. ADA Self-Evaluation Requirements

Required by 28 CFR 35.105, the ADA Self-Evaluation is a complete examination of all programs, services and activities provided by the City to ensure that, when viewed in their entirety, they are readily accessible to qualified people with disabilities. The purpose of the ADA Self-Evaluation is to identify areas where changes are needed to ensure access is in place for people with disabilities.

4. Who is a Qualified Person with a Disability?

To be qualified as a person with disabilities for the purposes of this Self-Evaluation, an individual must have a disability as defined below and must be qualified to participate in the programs, services or activities of the City.

Under California Government Code 11135, the ADA was incorporated into State law and therefore the ADA issues raised in this Report are both State and Federal issues. In California Government Code 12926, the definition of mental and physical disability was broadened beyond the ADAAA. Summarized as follows:

1. A person having a physical or mental disability that limits a major life activity. This person is considered as having unmitigated status (i.e., how the individual in question would function without the use of medication or devices that may mitigate the impact of the disability). If there is a limitation to a major life activity in this statute, coverage is established;

2. A person with a history of a disability as described above;
3. A person is regarded as having a disability, such as described.

California State law also provides protection to cancer survivors, people who have a genetic predisposition to illnesses or disabilities or people who have received services within a special education program.

D. Scope of the Self-Evaluation

The Self-Evaluation is intended as a review of the programs, services and activities provided by the City. The US Department of Justice (DOJ) within the ADA Title II, Technical Assistance Manual (TAM) (Section II-8.2000) recommends a scope of review for Self-Evaluations, which contains thirteen program areas which were considered for use in the development of this report. Areas considered include:

- The Transition Plan (physical access to certain City facilities)
- Policies that may limit or exclude the participation of people with disabilities
- Communication systems used by the City
- Provision of auxiliary aids and services to people who are engaged in the City's programs, services, or activities
- Access to emergency management for people with disabilities
- Disability awareness among City staff
- Policies addressing policy modification requests and the determination of fundamental alteration of programs
- Access to public meetings
- Human Resources programs and policies
- Construction policies
- City staff training and support
- ADA-related drug policies

E. Self-Evaluation Method of Review

The ADA mandates that a Self-Evaluation review all programs, services, and activities of the covered entity. The Self-Evaluation of the City's programs, services, and activities required and involved the participation of every City Department. SSA developed targeted accessibility surveys. Each Department was assigned relevant surveys based on their programs, services, and activities. Departments were instructed to complete a survey for different divisions if they were sufficiently separate and unique. Survey responses are summarized in Part II of this report. Copies of the surveys are included in Appendix I to this report, and survey responses and corresponding attachments are available upon request.

F. ADA Transition Plan Requirements

The ADA Transition Plan is required by 28 CFR 35.150 (d). An ADA Transition Plan must include the following components:

1. A list of all physical barriers in sites at which the City provides programs, services, or activities;
2. A statement regarding the method to be used to mitigate the barriers;
3. A schedule for barrier mitigation;
4. The name of the official who is responsible for the ADA Transition Plan administration.

The ADA Transition Plan will be contained in a separate report.

G. How This Report is Organized & To Be Utilized

The City of Madera is committed not only to compliance with federal and state laws regarding disability and access but strives to be a model of accessibility and reasonable accommodation best practices. Accordingly, this report is organized into two sections: (1) findings and recommendations for City-wide implementation; and (2) findings and recommendations on a Department-by-Department basis. Depending on survey responses and comments, not all Department-specific sections will include recommendations.

This Report is intended to be a summary – not a full recitation – of survey results. Each section begins with an overview of recommendations indicated with box bullet points and segues into a breakdown of survey summaries providing the basis for those recommendations. Other lists, such as lists of available accessibility resources, are generally indicated in footnotes.

By organizing the information in this way, the City can easily access the information it needs and use this Report to sharpen its focus on providing the best possible service to its constituents with disabilities and become a model of best practices.

II. SURVEY RESPONSES AND RECOMMENDATIONS

A. Printed Communications

Generally speaking, the ADA requires that the City provide print materials in formats accessible to persons who may be blind or have a vision impairment so as not to discriminate against people with disabilities.

1. Recommendations

- Ensure that all City printed publications and notices inform readers that the publications are available in alternative formats, if needed, for persons with disabilities.[2]
- Develop and implement staff training to ensure that all publications and correspondence use "person-first" language.[3]
- For documents that are regularly distributed, keep a few copies in large print format available.

[2] *See*, e.g., Articles on Best Practices for Accessible Print Materials
- https://www.aph.org/aph-guidelines-for-print-document-design/
- https://www.zaginteractive.com/insights/february-2020/making-your-printed-materials-ada-accessible
- https://perma.cc/JN75-2WDQ
- https://perma.cc/EHH7-XZFR
- https://uxdesign.cc/a-guide-to-understanding-what-makes-a-typeface-accessible-and-how-to-make-informed-decisions-9e5c0b9040a0

[3] *See*, e.g., Articles on Person-First Language and Training
- https://www.counseling.org/resources/library/vistas/2011-v-online/Article_05.pdf
- http://www.disabilityawarenesstraining.com/about-dave/blog/188-first-person-language

2. Survey Responses & Findings

Survey responses indicated a general lack of consistency around the accessibility of print materials. Respondents indicated that printed materials generally do not - or do not consistently - inform readers that publications are available in alternative formats, and the City does not have a style guide to ensure consistent accessibility of print materials. This assessment is based on survey responses received, and the City will need to evaluate if this is a training opportunity on existing practices or whether training is needed on proper notification of alternative format availability.

Chart 1: Alternative Format of Written Material

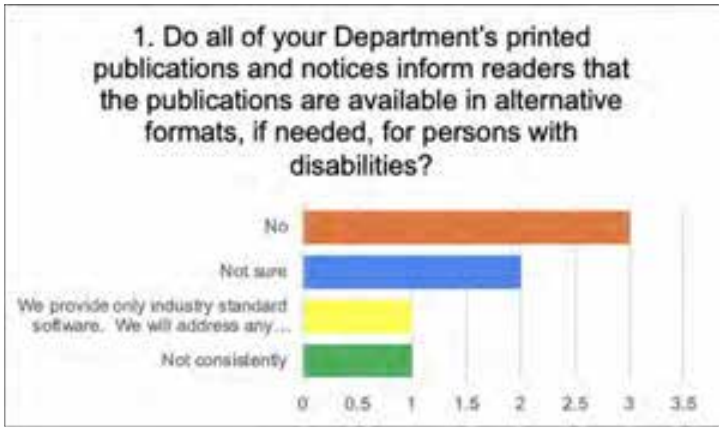

- Question: Do all of your Department's printed publications and notices inform readers that the publications are available in alternative formats, if needed, for persons with disabilities?
- Responses: No: 8; not sure: 3; not consistently: 1
- Comments: none

Chart 2: Font Type and Size

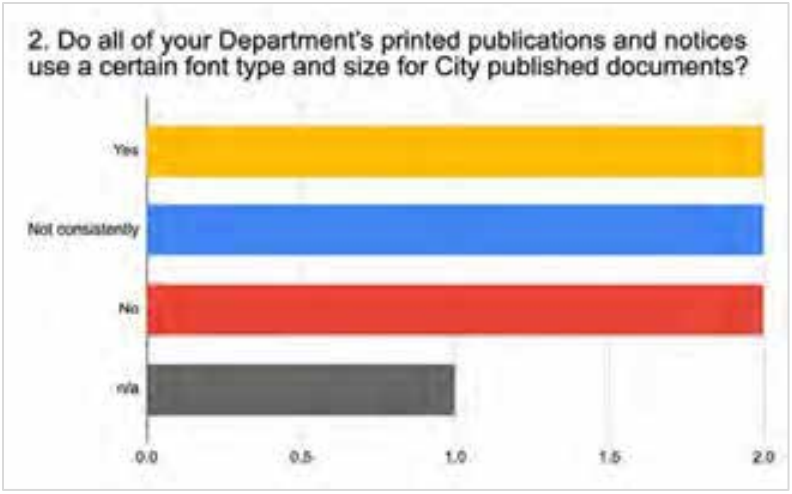

- Question: Do all of your Department's printed publications and notices use a certain font type and size for City published documents?
- Responses: yes: 2; no: 2; not consistently: 2; n/a: 1
- Comments: Two individuals commented that their department uses Calibri 11 consistently. One person said that their department is in the process of creating a handbook for consistency across departments on printed materials.

Chart 3: Review of Publications and Notices

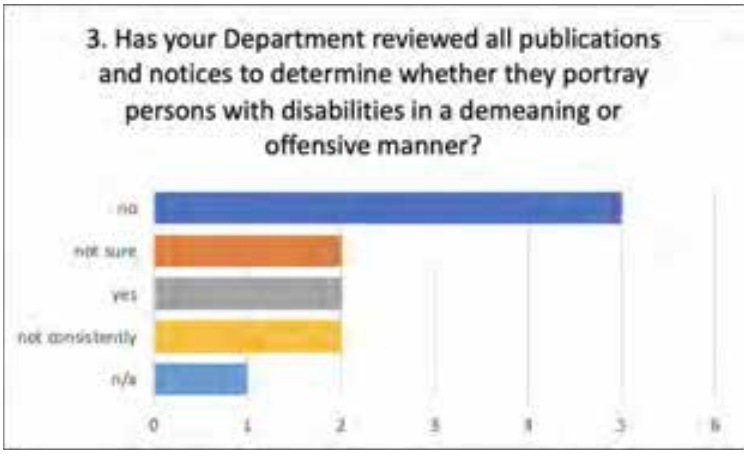

- Question: Has your Department reviewed all publications and notices to determine whether they portray persons with disabilities in a demeaning or offensive manner?
- Responses: no: 5; not sure: 2; yes: 2; not consistently: 2; n/a: 1
- Comments: One person noted that if the department did not have any publications or notices, this would not apply.

Chart 4: Staff Training

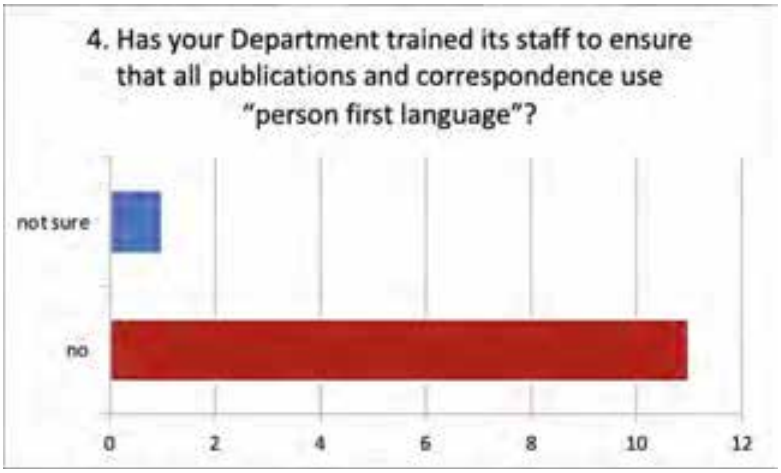

- Question: Has your Department trained its staff to ensure that all publications and correspondence use "person-first language"?
- Responses: no: 11; not sure: 1
- Comments: One person said that this is the first time they had ever heard of person-first language. Another person said that a quick reference guide to person-first language would be helpful.

B. Communication with People Who Are Deaf or Hard of Hearing

The ADA requires that the City ensure that all of its programs, services and activities can be fully accessed and enjoyed by people who may be deaf or hard of hearing. This may require, in some instances, provision of American Sign Language interpreters, captioning on videos, and provision of auxiliary aids.[4]

1. Recommendations

- Update business cards and letterhead to indicate "711 the California Relay".[5]
- Request public phone lines be tested to ensure TTY functionality and ensure that

[4] *See*, e.g. https://www.ada.gov/taman2.html#II-7.0000

[5] *See*, e.g. Information Regarding 711 the California Relay
- https://ddtp.cpuc.ca.gov/default1.aspx?id=1482

the public is informed of their option to utilize this accessible means of communication.[6]

- Develop a policy in place for securing Video Remote Interpreting (VRI) services and ensure all City Departments are aware of how to secure VRI services upon request.
- If videos are used (internally or for the public), ensure that all Departments are informed of resources available to make certain that videos are captioned.

2. Survey Responses & Findings

Survey responses indicated a general inconsistency as to whether City Departments are fully informed and resourced to provide full programmatic access to people who are deaf or hard of hearing.

- Question: Does your Department list “711 the California Relay” on business cards and letterheads?
- Responses: no: 12
- Comments: One person noted that during the last Self-Evaluation 10 years ago, they were told to take off all 711 information from their official correspondence and they have been following that guidance since. Another person noted that the City Council Agenda has 711 information at the bottom. Another person asked how 711 would work in tangent with Zoom meetings.

Chart 1: Accessible Telephone Lines

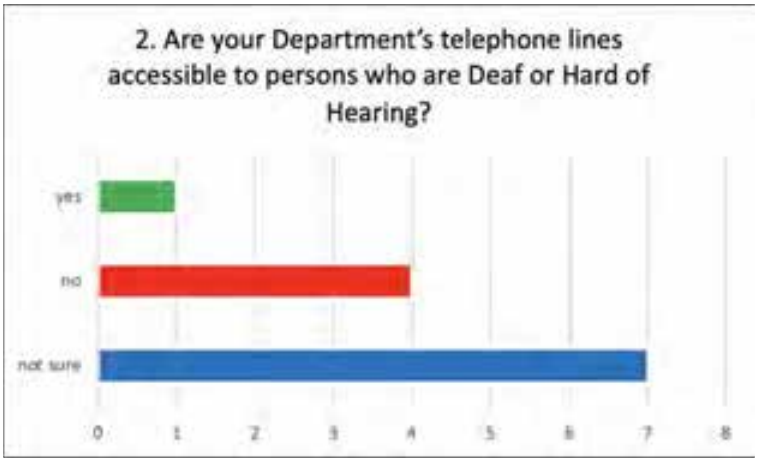

[6] *See*, e.g., FCC Consumer Accessibility Resources
- https://www.fcc.gov/general/disabilities-issues-guides

- Question: Are your Department's telephone lines accessible to persons who are deaf or hard of hearing?
- Responses: not sure: 7; no: 4; yes: 1
- Comment: One person said yes because the system has the option for users to increase/decrease volume. Another person noted that there is a high probability that the City will be switching phone systems in the next 3 to 6 months.

Chart 2: Auxiliary Aids

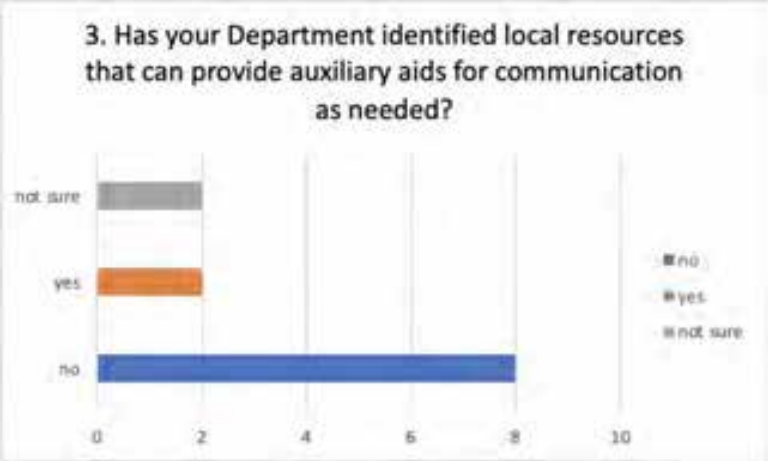

- Question: Has your Department identified local resources that can provide auxiliary aids for communication as needed?
- Responses: no: 8; not sure: 2; yes: 2
- Comments: One person gave an example of the City Clerk providing headsets for individuals upon request and noted that not all departments have meetings like this.

Chart 3: Video Remote Interpreting Services

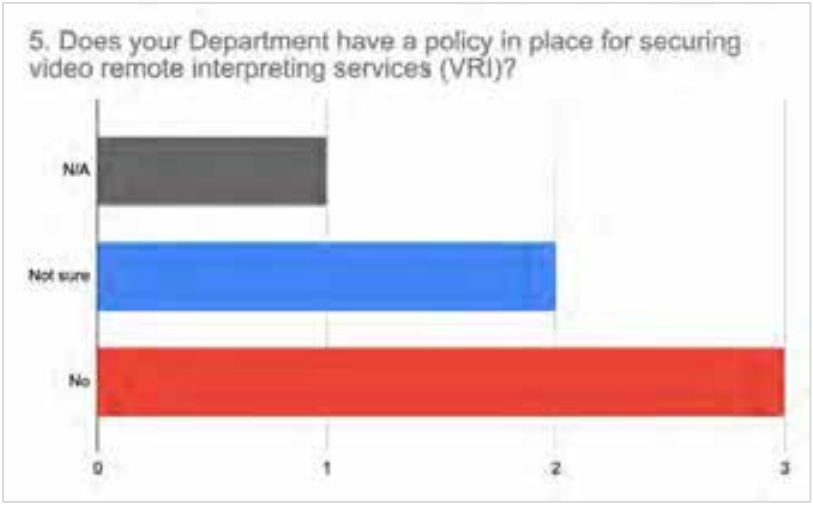

- Question: Does your Department have a policy in place for securing video remote interpreting services (VRI)?
- Responses: no: 7; not sure: 3; yes: 1
- Comments: none

Chart 4: Videos in Public Spaces

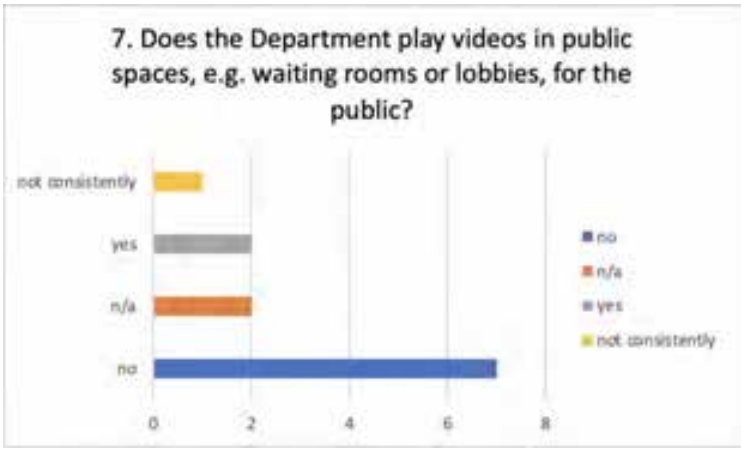

- Question: 7. Does the Department play videos in public spaces, e.g. waiting rooms or lobbies, for the public?
- Responses: no: 7; yes: 2; n/a: 2; not consistently: 1
- Comment: The Police Department plays videos.

C. Software and Digital Communication

Although the ADA precedes the age of most digital communications and platforms, numerous judicial decisions have held that digital communications and platforms must be made accessible to people with disabilities so as not to discriminate against this class of persons.

1. Recommendations

- Establish and implement policy that all websites, third party software, electronic payment systems, and electronic communications comply with current Web Content Accessibility Guidelines (WCAG 2.1 AA).[7] [8]
- Establish how WCAG compliance will be maintained and communicate this expectation across Departments.
- Establish and implement policy that all electronic documents (e.g. PDFs, Word documents and photographs) are accessible to people with disabilities and/or are available in alternative, accessible formats.[9]

2. Survey Responses & Findings

Software and digital communications are increasingly scrutinized for accessibility to people with disabilities. Survey responses here are consistent with many other Title II entities in that there is, generally, heavy reliance on Information Services to manage digital accessibility, and little is known about what digital access means from a user perspective.

Chart 1: Accessible Web Pages

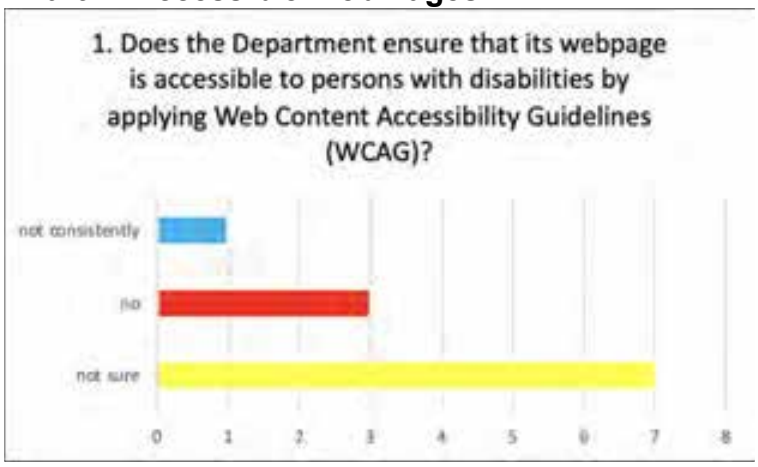

[7] This applies to Information Services as well, see below.
[8] Link to WCAG 2.1 https://www.w3.org/TR/WCAG21/
[9] *See*, e.g., Instructions on How to Create and Check Accessible PDFs
- https://helpx.adobe.com/acrobat/using/create-verify-pdf-accessibility.html

How to Make Accessible Images
- https://wishdesk.com/blog/make-images-accessible

How to Create Accessible Word Documents
- https://www.washington.edu/accessibility/documents/word/

- Question: 1. Does the Department ensure that its webpage is accessible to persons with disabilities by applying Web Content Accessibility Guidelines (WCAG)?
- Responses: not sure: 7; no: 3; not consistently: 1
- Comments: One individual noted that the City Communication Specialist would have been able to best answer this but was not surveyed.

Chart 2: Third Party Software

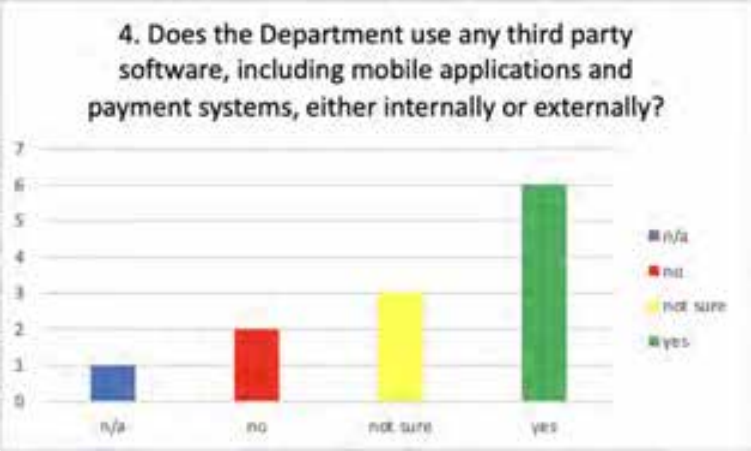

- Question: Does the Department use any third-party software, including mobile applications and payment systems, either internally or externally?
- Responses: yes: 6; not sure: 3; no: 2; n/a: 1
- Comments: none

Chart 3: Email Communication Attachments

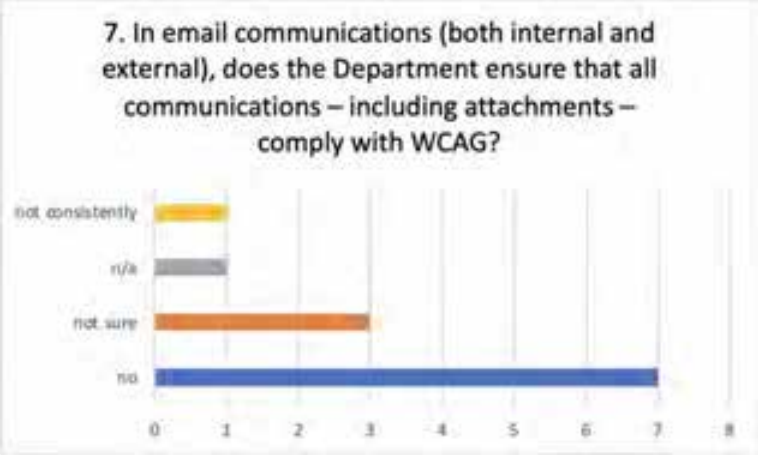

- Question: In email communications (both internal and external), does the Department ensure that all communications – including attachments – comply with WCAG?

- Responses: no: 7; not sure: 3; n/a 1; not consistently: 1
- Comments: none

Chart 4: Accessible PDFs

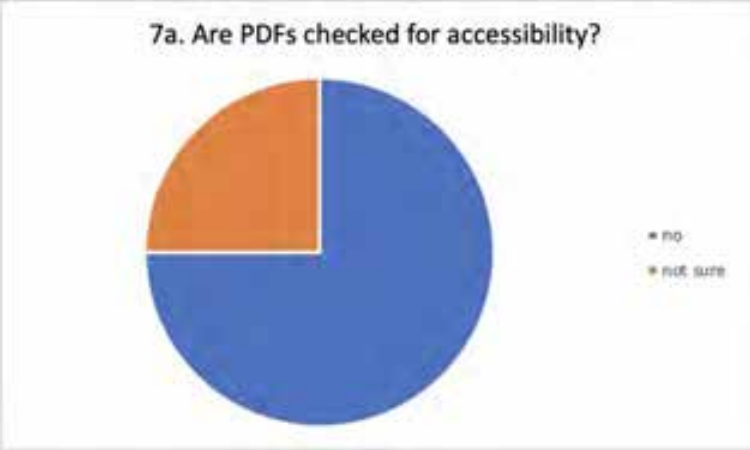

- Question: Are PDFs checked for accessibility?
- Responses: no: 9; not sure: 3
- Comments: none

Chart 5: Accessible Word Documents

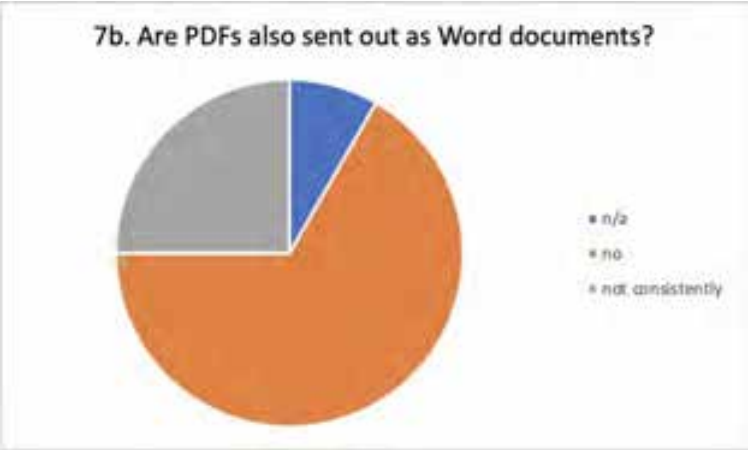

- Question: Are PDFs also sent out as Word documents?
- Responses: no: 8; not consistently: 3; n/a: 1
- Comments: One person noted that they purposely do not send Word documents to the public so that original documents cannot be altered. Another person asked whether this needed to be offered or done. Another person asked whether this

was for public meetings, whether this was mandated, and whether there was a funding source for ADA mandates. Another person asked if all PDFs are accessible, is there not the software equivalent that makes Word documents accessible. Another person noted that accessible documents can be made and gave the example that if someone has a vision issue, they can click on it themselves and the PDF can be changed into an accessible document if they have the right software. This person added that the City has Acrobat so they can also use that to make documents accessible before they send them out.

Chart 6: Accessible Photos

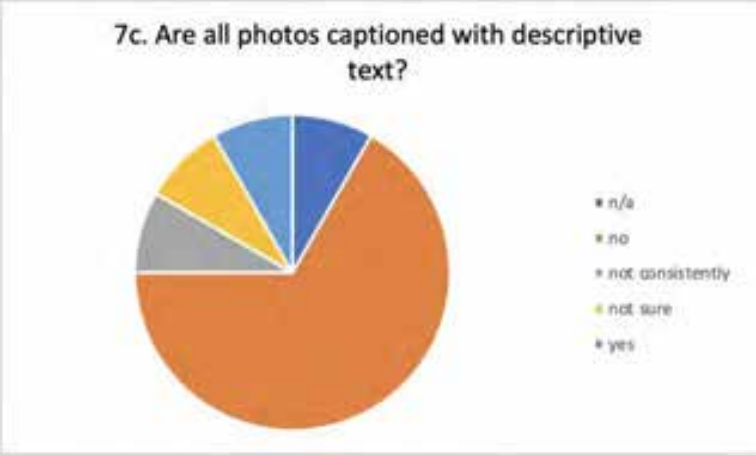

- Question: Are all photos captioned with descriptive text?
- Responses: no: 8; not sure: 1; yes: 1; not consistently: 1
- Comments: One person asked if this referred to background images. Another person noted that they thought the wording was throwing everyone off because not consistently may be coming up as no's in this survey. This person noted that they thought if the question were worded, "Are photos captioned with descriptive text" more people would have responded yes.

D. Staff & Employees

The ADA requires that people with disabilities are not discriminated against in hiring and/or the course of employment because of a disability.[10]

[10] *See*, e.g. https://www.ada.gov/taman2.html#II-4.1000.

1. Recommendations

- Consider partnering with local disability rights groups and organizations to affirmatively notify and recruit persons with disabilities to available roles.[11]
- Offer training on accessibility best practices and/or City disability policies and procedures to staff and employees[12][13]
- Ensure that all Departments have an easily ascertainable policy against disability harassment, as well as a grievance system that offers assistance to people with disabilities who, due to their disability, are not able to independently complete the grievance.

2. Survey Responses & Findings

Survey responses indicated that there is a centralized process for general training around disability awareness and etiquette training, as well as how to initiate and engage in the interactive reasonable accommodations process. There is also a centralized procedure for how a grievance regarding a reasonable accommodations request would be received and processed. Respondents indicated they stay up to date on disability awareness and etiquette training and that they look forward to their continued up-to-date trainings.

[11] *See*, e.g. Abilities Job Fair (https://www.abilities.com/community/job-fair.html), Respectability (https://www.respectability.org/resources/job-seekers-disabilities/); DAV (https://www.dav.org/veterans/employment-resources/).
[12] *See*, e.g., footnote 14.
[13] Employers' Practical Guide To Reasonable Accommodation Under The Americans With Disabilities Act (ADA)

- https://askjan.org/publications/employers/employers-guide.cfm

Chart 1: Accessible Job Listings

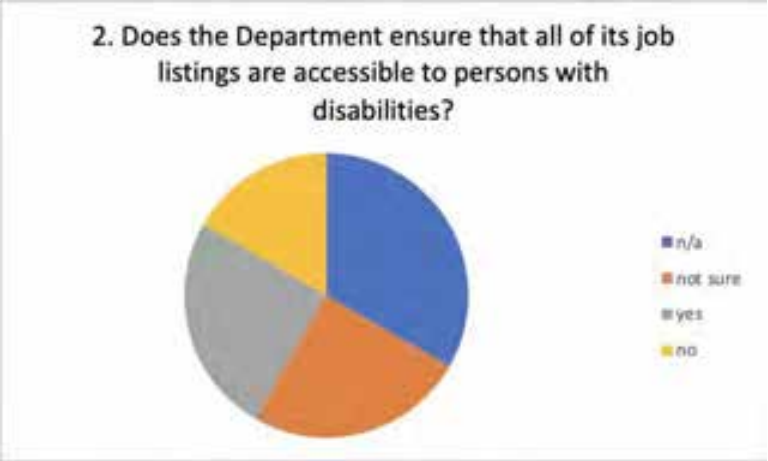

- Question: Does the Department ensure that all of its job listings are accessible to persons with disabilities?
- Responses: n/a: 4; not sure: 3; yes: 3; no: 2
- Comments: One person noted that Human Resources does all of the job listings so the “no’s” in the response may have been because departments do not do their own listings.

Chart 2: Non-Discrimination Statement

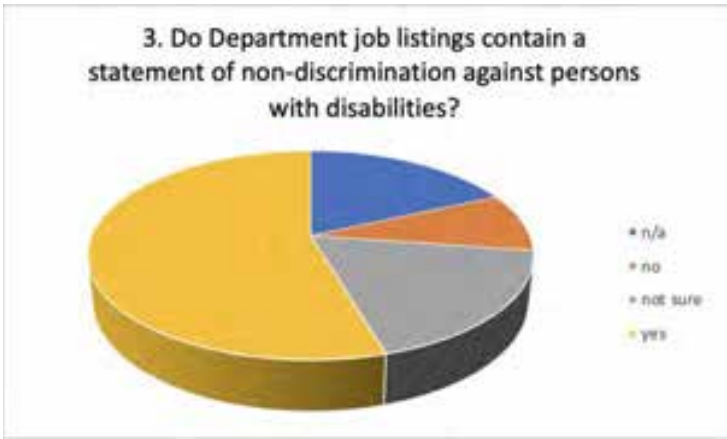

- Question: Do Department job listings contain a statement of non-discrimination against persons with disabilities?
- Responses: yes: 6; not sure: 2; n/a 2; no: 1
- Comments: One person noted that all job listing are done by Human Resources and do contain a statement of non-discrimination against person with disabilities.

Chart 3: Candidate Reasonable Accommodation

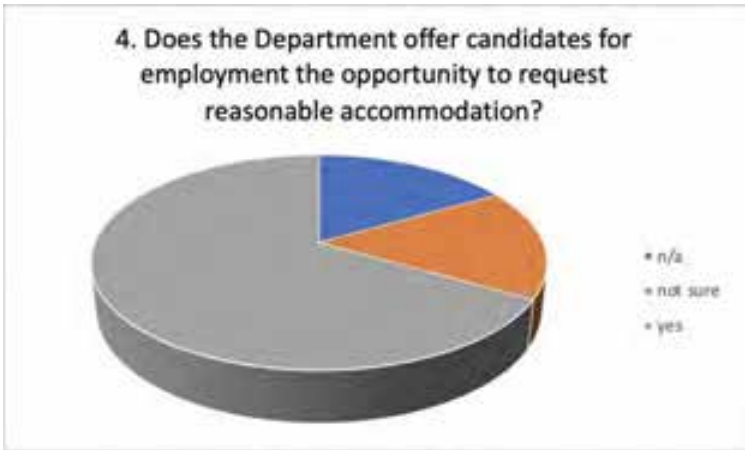

- Question: Does the Department offer candidates for employment the opportunity to request reasonable accommodation?
- Responses: yes: 8; n/a: 2; not sure: 2
- Comments: One person noted that Human Resources ensures this with a page in the job application.

Chart 4: Interview Panel Training and Awareness

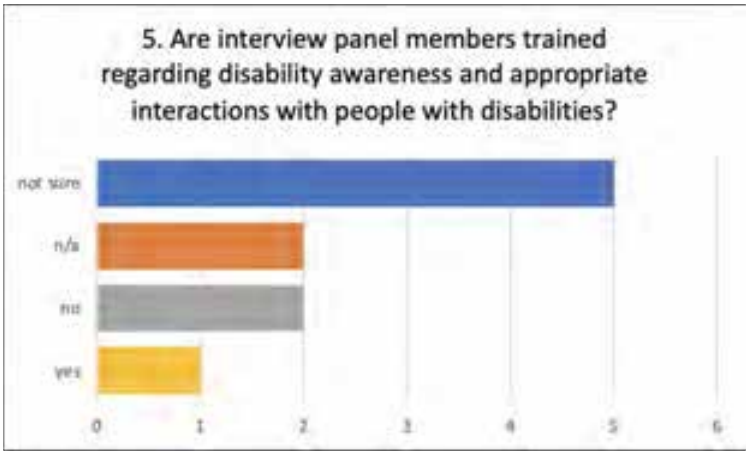

- Question: 5. Are interview panel members trained regarding disability awareness and appropriate interactions with people with disabilities?
- Responses: not sure: 5; n/a: 2; no: 2; yes: 1
- Comments: One person noted that Human Resources handles this and everyone involved with interview panels receives standard training.

Chart 5: Best Practices Training

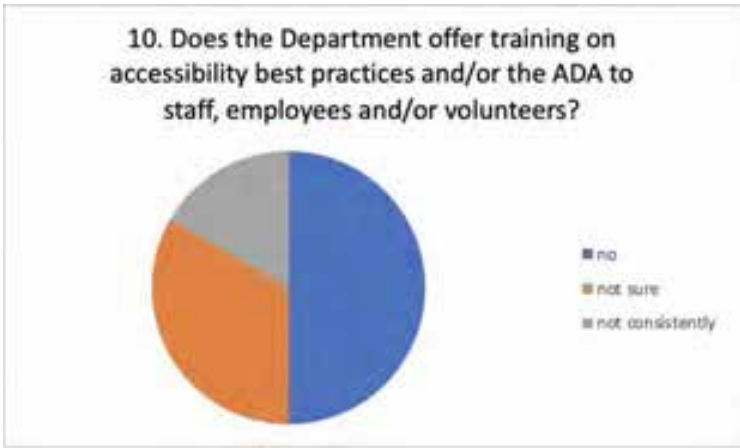

- Question: 10. Does the Department offer training on accessibility best practices and/or the ADA to staff, employees and/or volunteers?
- Responses: no: 6; not sure: 4; not consistently: 2
- Comments: One person noted that the City employs risk management that sends out weekly training bulletins that include ADA best practices.

Chart 6: Opportunities for Advancement and Education

- Question: Does the Department ensure that all opportunities for advancement and education are available and accessible to Staff and Employees who may have a disability? This includes, but is not limited to certifications, workshops, trainings, conferences, meetings, etc.
- Responses: yes: 9; not sure: 2; n/a: 1
- Comments: One person clarified that the question is asking are all opportunities made available to everyone.

Chart 7: Reasonable Accommodations Process

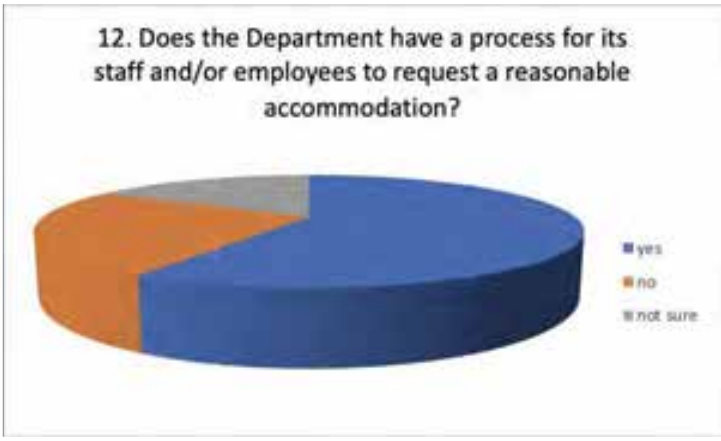

- Question: Does the Department have a process for its staff and/or employees to request a reasonable accommodation?
- Responses: yes: 7; no: 3; not sure: 2
- Comments: One person noted that there is a documented interactive process for requesting accommodations and guessed that the “no’s” are from departments that have not yet gotten an accommodation request.

Chart 8: Search for Vacant, Funded Position

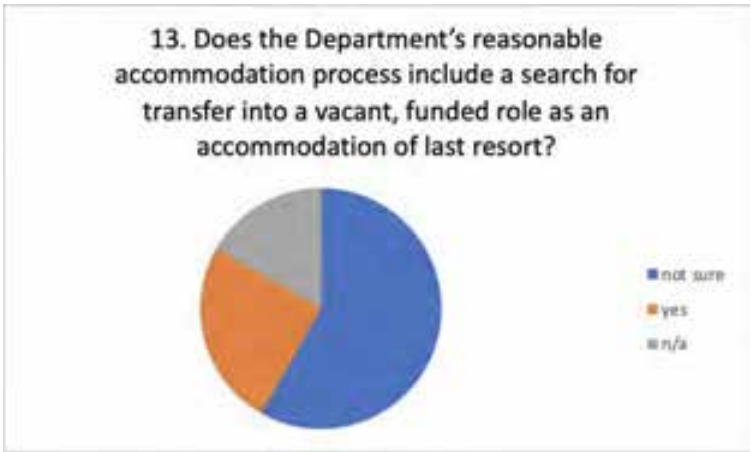

- Question: Does the Department’s reasonable accommodation process include a search for transfer into a vacant, funded role as an accommodation of last resort?
- Responses: not sure: 7; yes: 3; n/a: 2
- Comments: One person stated that there is a consistent process and it is one of the areas explored in the interactive process. Another person noted that they thought survey responders might be misinterpreting the question or answering in

an area outside of their expertise. This person concurred that the City has a process for this and that an individual with restrictions has a process where the City will look for a transfer into a vacant, funded role. The person added that the City follows this 100% of the time.

Chart 9: Service and Support Animal Policy

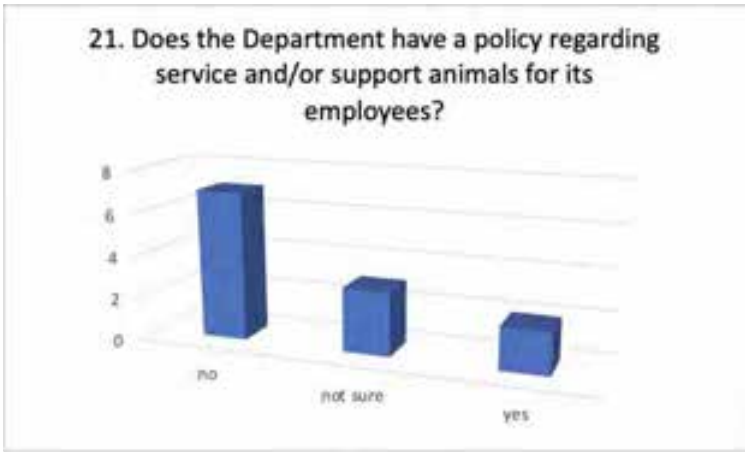

- Question: Does the Department have a policy regarding service and/or support animals for its employees?
- Responses: no: 7; not sure: 3; yes: 2
- Comments: One person noted that the City follows ADA mandates regarding service and/or support animals.

E. Purchasing, Contracts, Vendors

The City should ensure that people with disabilities are not precluded from participating in the contractual bidding process, that contractors are required to comply with disability-related rules and regulations, and that services and products procured are equally available and accessible to persons with disabilities.[14] Additionally, items purchased for use in the delivery of a Title II entity's programs, services or activities should be accessible and available for use by persons with disabilities, or be capable of modification to ensure access.

[14] *See*, e.g. https://www.ada.gov/taman2.html#II-3.7100.

1. Recommendations

- Ensure that documents related to bidding and contracting are uniformly (i.e. across Departments) accessible and available in alternative formats.
- Continue training and offer guidance for staff and vendors regarding clear space and furniture placement.[15]
- Inform all Departments as to what steps an employee or member of the public with a disability has available if they believe they have been discriminated against by a County vendor or contractor.

2. Survey Responses & Findings

Generally, survey respondents who were unsure as to whether accessibility was considered in the purchase of new products, and/or the accessibility of the bidding process were answering to the best of their knowledge but outside of their area of expertise. The respondents noted lack of awareness of areas that are not in their responsibility or expertise. Training to ensure that all department heads are aware of what other departments are doing to ensure that people with disabilities are not precluded from participating in the contractual bidding process, that contractors are required to comply with disability-related rules and regulations, and that services and products procured are equally available and accessible to persons with disabilities would be helpful.

[15] *See*, e.g. U.S. Access Board: Clear Floor or Ground Space & Turning Space
- https://www.access-board.gov/ada/guides/chapter-3-clear-floor-or-ground-space-and-turning-space/

Chart 1: Purchase of New Equipment

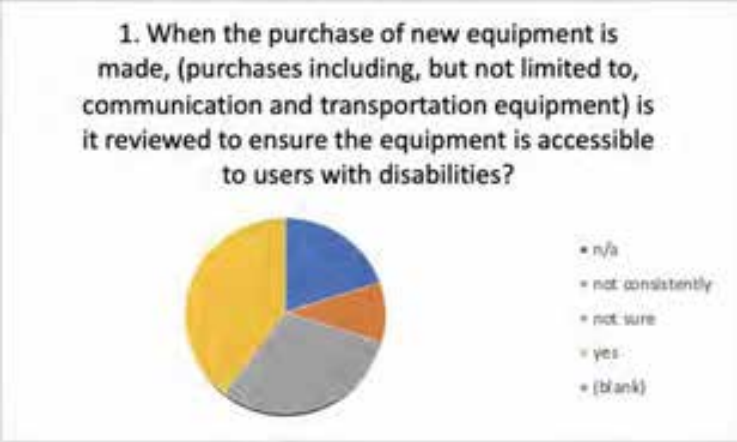

- Question: When the purchase of new equipment is made, (purchases including, but not limited to, communication and transportation equipment) is it reviewed to ensure the equipment is accessible to users with disabilities?
- Responses: yes: 4; not sure: 3; n/a: 2; not consistently: 1
- Comments: One person noted that there are reviews that ensure equipment is accessible for current employees but not for all possible prospective candidates.

Chart 2: Accessible Bidding Process

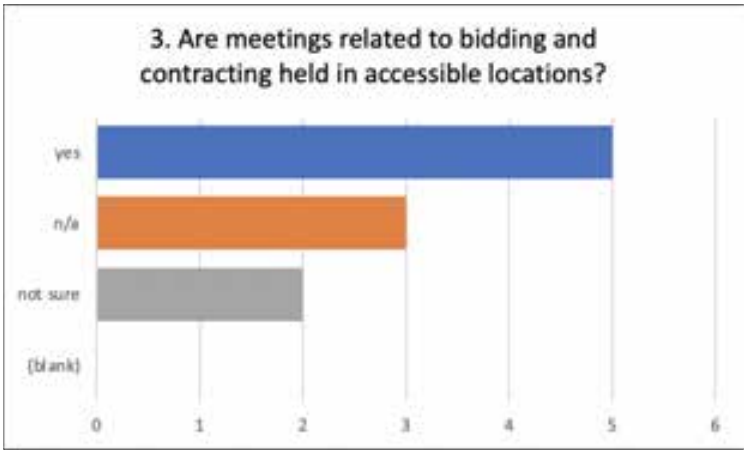

- Question: Are meetings related to bidding and contracting held in accessible locations?
- Responses: yes: 5; n/a: 3; not sure: 2
- Comments: One person noted that “n/a’s” might not be familiar with bids and clarified that all notice meetings are held in accessible meeting spaces. Another person asked whether this was upon request.

Chart 3: Clear Space and Furniture Placement

- Question: Is guidance in place for staff and vendors regarding clear space and furniture placement?
- Responses: not sure: 5; no: 2; yes: 1; n/a: 1
- Comments: One person noted that this was all part of safety inspection processes and would depend on the person answering the question. The person clarified that if the person surveyed was not in the safety inspection process, they might not be aware and that inspections occur yearly with the threat of penalties involved.

F. Construction & Remodels

The 2010 ADA Standards for Accessible Design set minimum requirements – both scoping and technical -- for newly designed and constructed or altered public accommodations to be readily accessible to and usable by individuals with disabilities.[16]

1. Recommendations

- Consider creating and implementing policy requiring major public projects to be reviewed by stakeholders with disabilities during the planning stage.

[16] *See*, e.g. https://www.ada.gov/taman2.html#II-6.0000

2. Survey Responses & Findings

Survey respondents uniformly indicated that all design contracts hold design professionals to designs that use, at minimum, the most stringent access standards in effect at the time of the project. Survey responses were less clear as to whether stakeholders with disabilities are engaged on major projects during the planning stages.

Chart 1: Design Contracts Standards

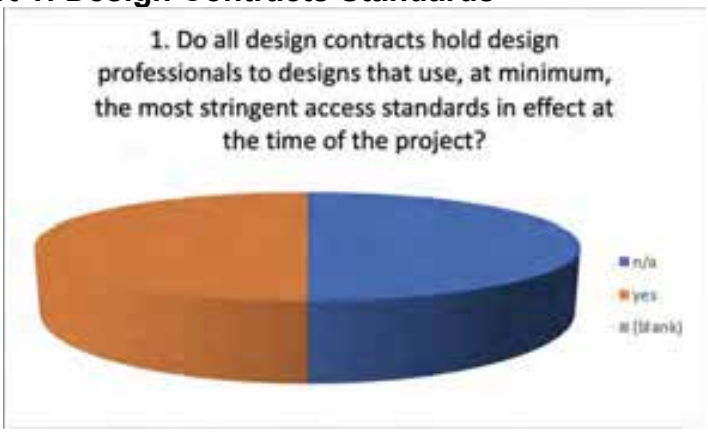

- Question: 1. Do all design contracts hold design professionals to designs that use, at minimum, the most stringent access standards in effect at the time of the project?
- Responses: yes: 3; n/a: 3
- Comments: One person noted that they follow whatever the law mandates but they are not sure on what “most stringent” meant because they thought you either meet a requirement or you don’t. Another person noted that when laws potentially vary, the City does follow whichever law is the most stringent guideline.

Chart 2: Major Public Projects

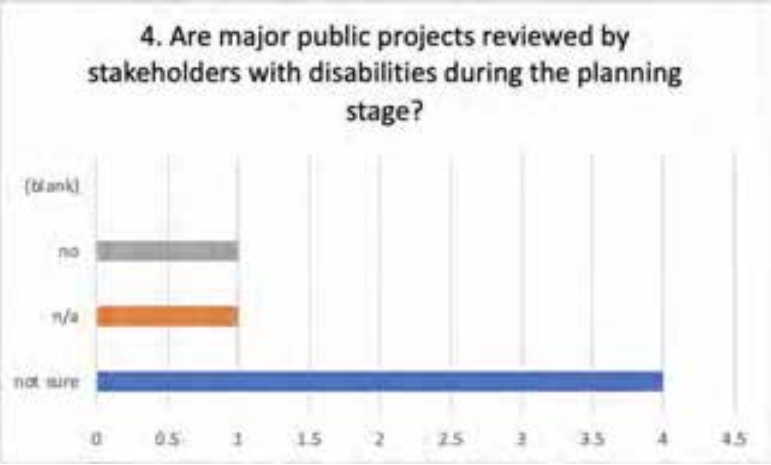

- Question: 4. Are major public projects reviewed by stakeholders with disabilities during the planning stage?
- Responses: not sure: 4; n/a: 1; no: 1
- Comments: none

G. Facilities & Real Estate Management

Facilities and real estate under the control of the City should be maintained in a way to ensure access to all locations and features by people with disabilities.[17]

1. Recommendations

- Continue training Departments and ensuring general awareness regarding how the City ensures proper maintenance of accessible features.[18]

2. Survey Responses & Findings

Survey responses indicated a uniform, regular approach to ensure accessibility of public rights of way but were less consistent in their knowledge of the maintenance of accessible features (e.g. by Maintenance) and/or ensuring access during construction.

[17] *See* https://www.ada.gov/taman2.html#II-3.10000 and https://www.ada.gov/taman2.html#II-5.0000
[18] *See*, e.g. U.S. Access Board: Clear Floor or Ground Space & Turning Space https://www.access-board.gov/ada/guides/chapter-3-clear-floor-or-ground-space-and-turning-space/

Chart 1: Accessibility Construction Inspection Checklist

- Question: 2. Does your Department have an accessibility construction inspection checklist for use by building code officials/building inspectors as a reference guide to assist with on-site inspection of accessibility features and construction elements affecting accessibility compliance to your facilities?
- Responses: not sure: 2; yes: 1; no: 1; n/a: 1
- Comments: One person noted that the City does have building inspectors that follow California Building Code. They clarified that nobody can legally approve a document or building plan that does not comply with ADA standards and they do not know who would have responded as such.

H. Planning, Construction & Buildings

Generally, all facilities designed, constructed, or altered by, on behalf of, or for the use of a public entity must be readily accessible and usable by individuals with disabilities, if the construction or alteration is begun after January 26, 1992. Additionally, there must be a grievance process available to the public for any alleged failures to comply with this requirement.[19]

1. Recommendations

[19] *See*, e.g. https://www.ada.gov/taman2.html#II-8.5000

- Where applicable, develop an accessibility checklist or accessibility protocols (e.g. current accessibility practices) for use on all projects and assign a staff person to ensure compliance with this checklist.

2. Survey Responses & Findings

Survey responses uniformly noted that, when examining plans, the pertinent City Departments evaluate accessibility requirements.

I. Fleet Services

If the City provides Fleet Services as any part of its programs, services, and activities, it should ensure that these are equally available and accessible to persons with disabilities to avoid discriminating against those persons.

1. Recommendations

- Based on survey responses there are no recommendations for this section at this time.

2. Survey Responses & Findings

Survey responses indicated that some City services include Fleet services and that, in the implementation of these services, Federal standards are integrated into the procurement process, and operators are trained in working with people with disabilities. Additionally, service animals are permitted on City transportation systems.

J. Public Meetings

The ADA requires that the City ensure equal access to participation in public meetings and events.[20]

1. Recommendations

- Create and implement an events accessibility checklist for all Departments that hold public meetings which addresses, at a minimum, the items included within this portion of the Self-Evaluation survey.[21]

2. Survey Responses & Findings

Survey responses indicated a general lack of uniformity regarding the advertisement and implementation of accessible City events and functions. Respondents were not aware of an events accessibility checklist, or whether event announcements contained an announcement that reasonable accommodations are available for persons with disabilities as needed and/or upon request.

Respondents indicated that City events and functions are held in buildings and rooms that are fully accessible, but that not all staff are not trained in how to set up meeting rooms to provide maneuvering space for persons who use wheelchairs or service animals. Many of these items can be adequately addressed by implementing a uniform events accessibility checklist, such as the one noticed in footnote 26, *supra*.

[20] *See*, e.g. https://www.ada.gov/taman2.html#II-3.3000

[21] *See*, e.g. American Bar Association: Commission on Disability Rights, Planning Accessible Meetings and Events

- https://www.americanbar.org/content/dam/aba/administrative/mental_physical_disability/Accessible_Meetings_Toolkit.authcheckdam.pdf

Chart 1: Events Accessibility Checklist

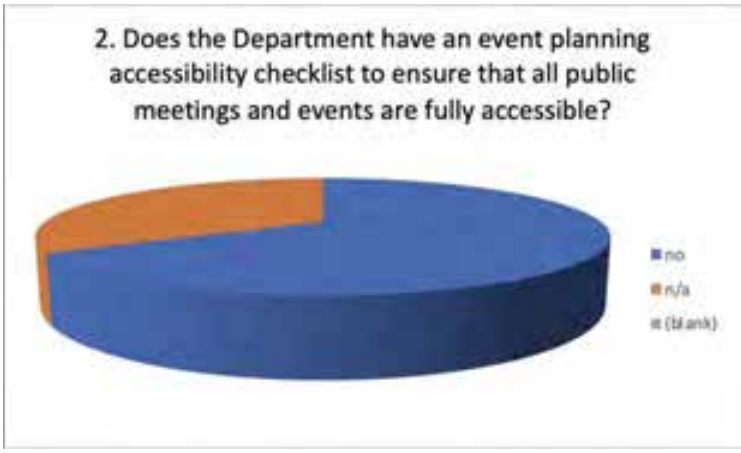

- Question: Does the Department have an event planning accessibility checklist to ensure that all public meetings and events are fully accessible?
- Responses: no: 6; n/a: 3
- Comments: One person noted the City Clerk's office was not in attendance but that the City Clerk does have a planning checklist for setting up city council meetings.

Chart 2: Public Meeting Notices

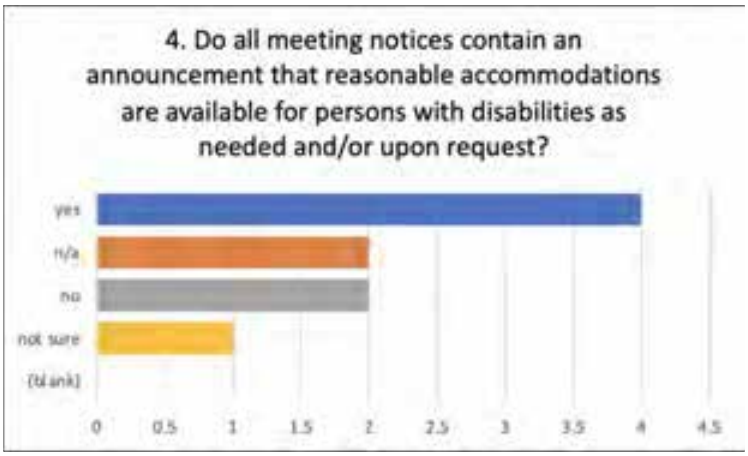

- Question: Do all meeting notices contain an announcement that reasonable accommodations are available for persons with disabilities as needed and/or upon request?
- Responses: yes: 4; no: 2; n/a: 2; not sure: 1
- Comments: One person noted that they should all be providing such an announcement, and they are pretty sure that they do. Another person noted that the standard language they should all be following is a statement included on all City Council agendas, that has been reviewed by the City Attorney.

Chart 3: Setting Up Meeting Rooms

- Question: Is staff trained to set up meeting rooms to provide maneuvering space for persons who use wheelchairs or service animals?
- Responses: no: 3; n/a: 2; not sure: 2; not consistently: 2
- Comments: none

Chart 4: Accessible Meeting Locations

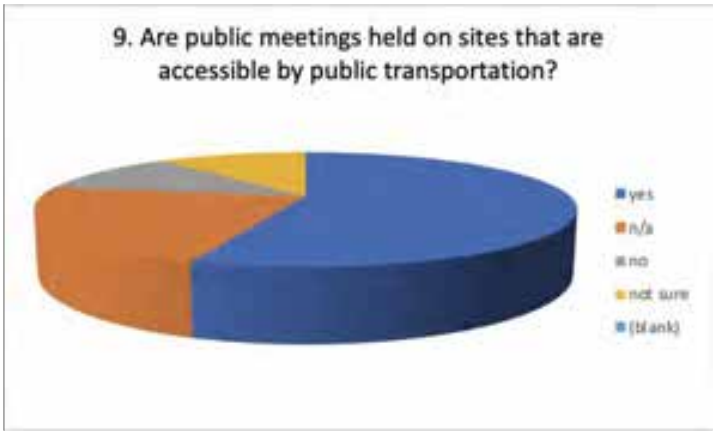

- Question: Are public meetings held on sites that are accessible by public transportation?
- Responses: yes: 5; n/a: 2; no: 1; not sure: 1
- Comments: One person clarified that all public meetings are held on sites that are accessible by public transportation and that they were not sure who would have responded otherwise.

Chart 5: Public Meeting Notices

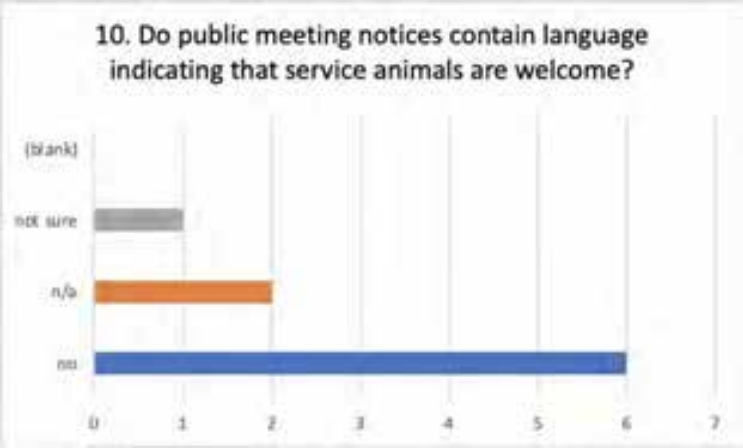

- Question: Do public meeting notices contain language indicating that service animals are welcome?
- Responses: no: 6; n/a: 2; not sure: 1
- Comments: none

Chart 6: Service Animal Relief Areas

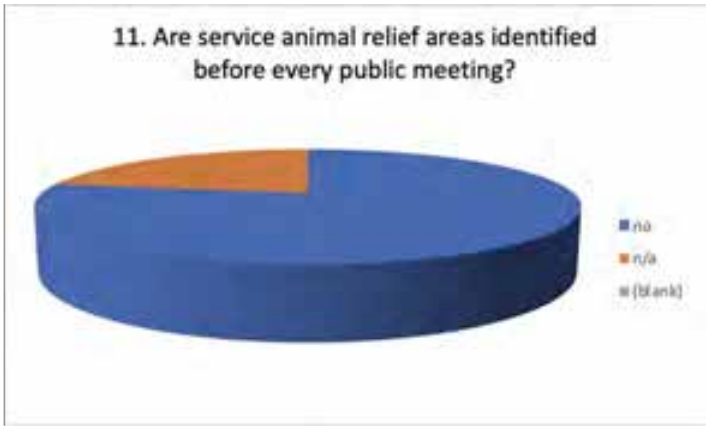

- Question: Are service animal relief areas identified before every public meeting?
- Responses: no: 7; n/a: 2
- Comments: One person asked for clarification on whether that was mandated. They stated they were aware of general requirements about allowing service animals but had never been aware of the relief areas. Another person noted that they were not sure that anyone has ever brought a service animal to a public meeting, so they have not had the opportunity to make that kind of announcement. Another person stated that they have not had service animal requests for public meetings but that they have had experience with seniors requesting service animals in senior services.

Chart 7: Reserved Seating

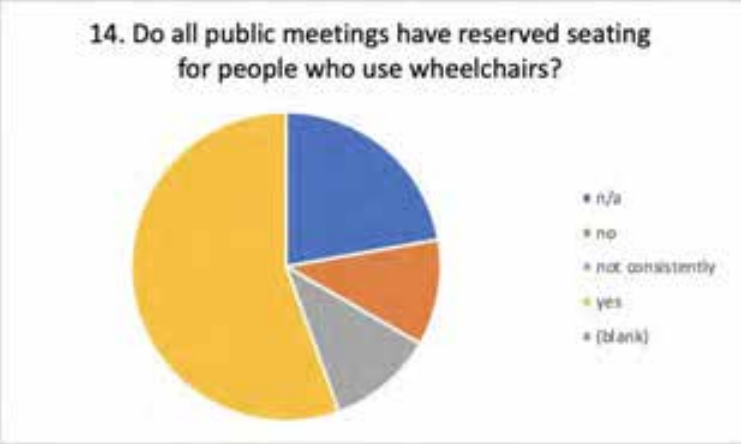

- Question: Do all public meetings have reserved seating for people who use wheelchairs?
- Responses: yes: 5; n/a: 2; no: 1; not consistently: 1
- Comments: One person stated that Council chambers have dedicated seating for people who use wheelchairs and companion seating. The person guessed that anyone answering no may be referring to a standard conference room.

Chart 8: Presenter Best Practices

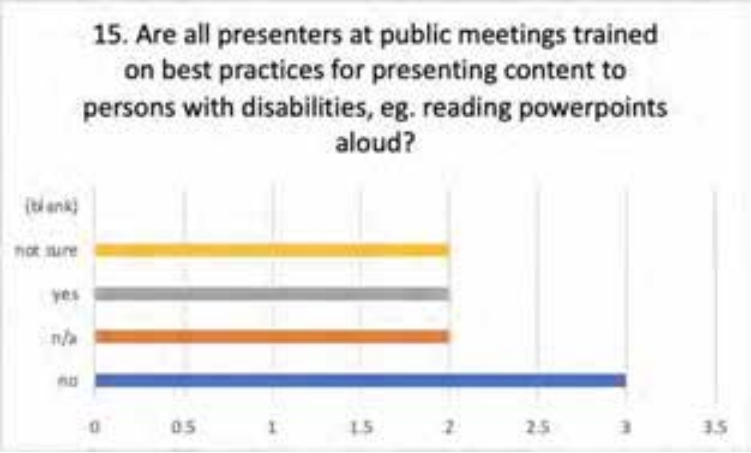

- Question: Are all presenters at public meetings trained on best practices for presenting content to persons with disabilities, eg. reading powerpoints aloud?
- Responses: no: 3; n/a: 2; not sure: 2; yes: 2
- Comments: One person noted that it's traditionally taught not to read aloud powerpoint because it is redundant. The person noted that the smallest font they use on powerpoint presentations is 28.

Chart 9: Sign Language Interpreters

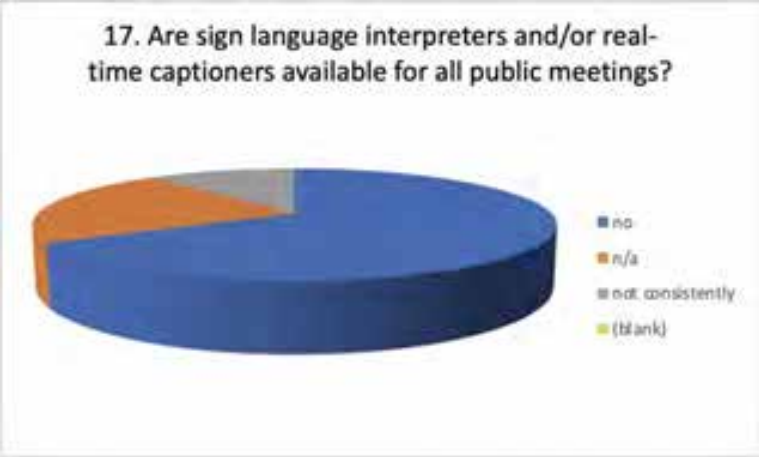

- Question: Are sign language interpreters and/or real-time captioners available for all public meetings?
- Responses: no: 6; n/a: 2; not consistently: 1
- Comments: One person noted that if they thought the question was misleading because if interpreters are not requested, then they are not present. The person clarified that interpreters are available upon request as mandated. Another person noted that real time captioning may be a possibility in the future and that they would investigate the City's current ability to do so.

K. Emergency Procedures

Generally, emergency plans and procedures should account for people with disabilities to ensure their safety and care during emergency situations.

1. Recommendations

- Continue communication with emergency partners to ensure that any evacuation facilities are accessible to persons with disabilities.
- Ensure that all Staff and employees are aware of the City's: Building Safety Plan, evacuation procedures for persons with disabilities, and designated waiting areas within buildings for disabled people to wait for rescue by first responders.
- Continue staff and employees training on best practice to evacuate people with disabilities.[22]

[22] See, e.g. FEMA/American Red Cross: Preparing for Disaster for People with Disabilities and other Special Needs

2. Survey Responses & Findings

As our world experiences increasingly dramatic and catastrophic weather events, active shooter events, and the secondary impacts of these, it is exceedingly important for public entities to have thorough, updated emergency and evacuation procedures, as well as a staff well-trained and prepared to execute those. Here, survey responses were inconsistent regarding the existence, implementation, and regular updating of / training for emergency evacuation procedures, including the safe evacuation of people with disabilities. Continued training in Safety Committees and on evacuation plans would be helpful in raising awareness of the City's emergency procedures.

Chart 1: Evacuation Procedures

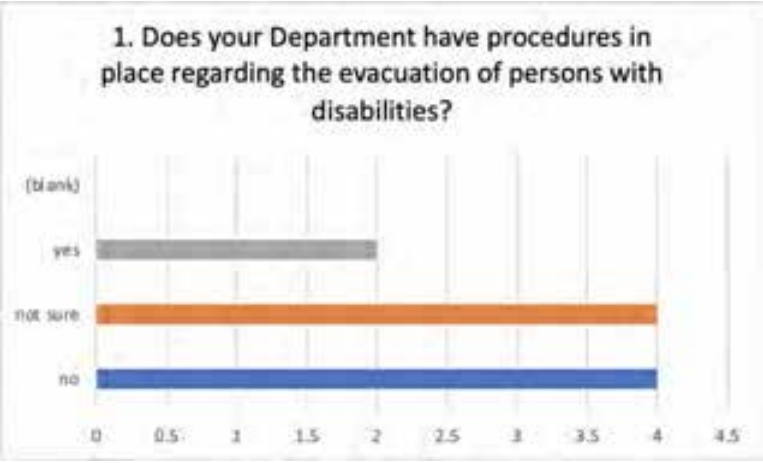

- Question: Does your Department have procedures in place regarding the evacuation of persons with disabilities?
- Responses: not sure: 4; no: 4; yes: 2
- Comment: One person noted that anyone who responded "not sure" or "no" needed to check with their Safety Committee training on their Department's evacuation plan.

- https://oes.ucsc.edu/emergency-preparedness/procedures/arcdisasterprep.pdf

L. Records

Processes should be in place to ensure that all City records can be accessed by persons with disabilities, including but not limited to people who are blind or vision-impaired, Deaf or hard of hearing, and/or mobility-impaired.

1. Recommendations

- Based on survey responses there are no recommendations for this section at this time.

2. Survey Responses & Findings

Survey responses indicated that records are generally kept in both digital and hard copy format, and that there are either accessible physical locations for viewing these records (e.g. accessible desks or counters), and/or that assistance is provided upon request.

M. Capital Projects

1. Recommendations

- Similar to the recommendation in the “Planning, Construction & Building” section of this report, develop an accessibility checklist or accessibility protocols (e.g. current accessibility practices) for use on all Capital projects and assign a staff person to ensure compliance with this checklist.

2. Survey Responses & Findings

Chart 1: Accessibility Checklist for Capital Projects

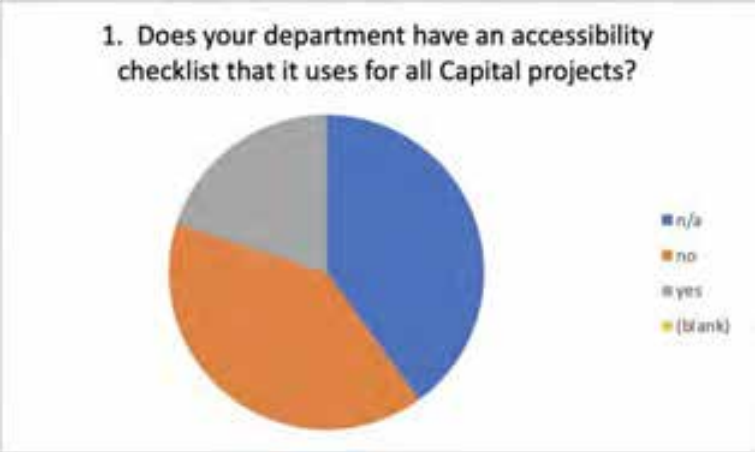

- Question: 1. Does your department have an accessibility checklist that it uses for all Capital projects?
- Responses: no: 2; yes: 1; n/a: 2
- One person answered that they have a mental checklist. Another person answered that Engineering uses checklists and design reviews to ensure compliance.

N. General Purchases

1. Recommendations

- Establish a uniform process for ensuring accessibility of items - including furniture and items with operational parts - purchased for installation.

2. Survey Responses & Findings

Survey responses generally indicated a lack of policy or practice - or knowledge thereof - to ensure the consideration of accessibility in general purchasing.

Chart 1: Accessibility of Purchased Items

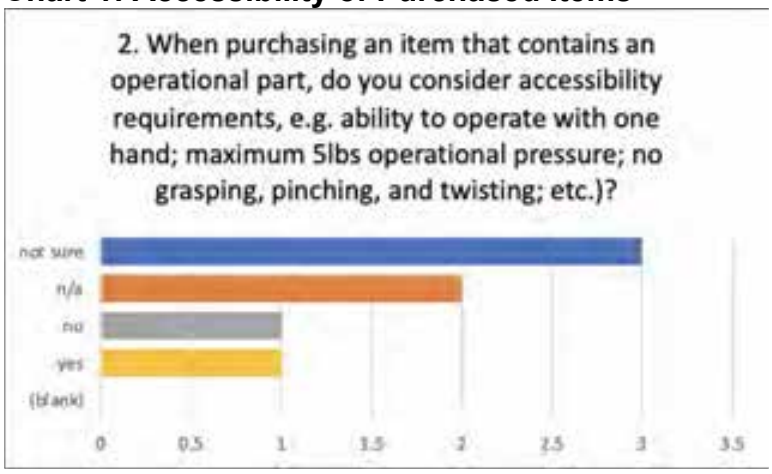

- Question: When purchasing an item that contains an operational part, do you consider accessibility requirements, e.g. ability to operate with one hand; maximum 5lbs operational pressure; no grasping, pinching, and twisting; etc.)?
- Responses: not sure: 3; n/a: 2; no: 1; yes: 1
- Comments: none

Chart 2: Furniture Accessibility

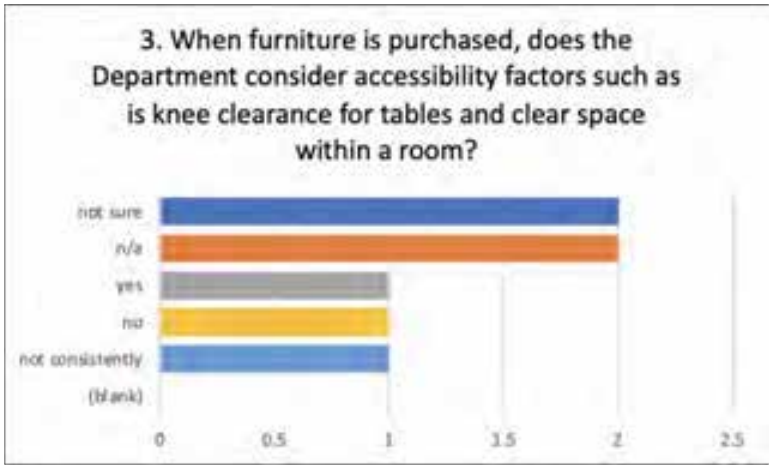

- Question: When furniture is purchased, does the Department consider accessibility factors such as, is knee clearance for tables and clear space within a room?
- Responses: n/a: 2; not sure: 2; no: 1; not consistently: 1; yes: 1
- Comments: One person noted that many of them are in older building and sometimes needing to squeeze furniture wherever they can but that aisleways are always kept clear, absolutely.

O. Information Technology

1. Recommendations

Most responses regarding Information Technology were addressed in above sections, or deferred to Information Services, see those recommendations below.

2. Survey Responses & Findings

See Information Services, below.

P. General

1. Recommendations

- Ensure that all Departments are aware of where ADA Notices of Compliance are posted.
- Ensure that all Departments are aware of the City's policy regarding service and/or emotional support animals for its employees and/or the public.
- Ensure that all Departments that offer printed informational brochures to the public, and all Departments that issue any sort of fine or citation, have those available in large print format, and can provide alternative formats upon request.

2. Survey Responses & Findings

Survey respondents generally indicated they were unsure or did not believe their Department had an ADA Notice of Compliance posted, and were unsure whether the City has a policy of service and/or support animals. Some Departments indicated that they provide printed brochures, but do not keep large print copies on hand. Additionally, most survey respondents were not aware of a City policy that prohibits discrimination against people who formerly used drugs illegally and have been through a rehabilitation program.

Chart 1: Posting of ADA Notice of Compliance

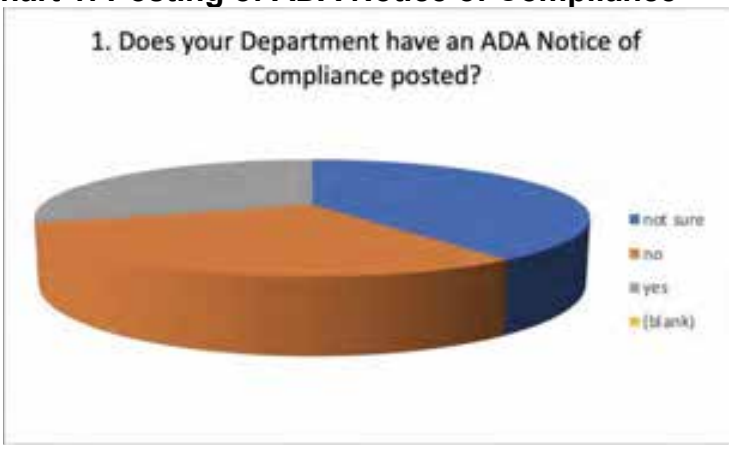

- Question: Does your Department have an ADA Notice of Compliance posted?
- Responses: not sure: 4; no: 3; yes: 3
- Comments: One person noted that they have seen the notices posted in breakrooms and around City buildings.

Chart 2: Service and Support Policies for Employees and the Public

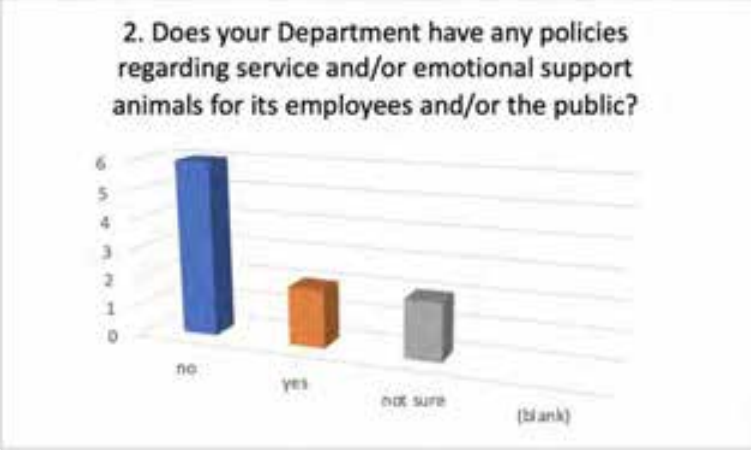

- Question: 2. Does your Department have any policies regarding service and/or emotional support animals for its employees and/or the public?
- Responses: no: 6; not sure: 2; yes: 2

Chart 3: Policy Prohibiting Discrimination Based on Previous Drug Use

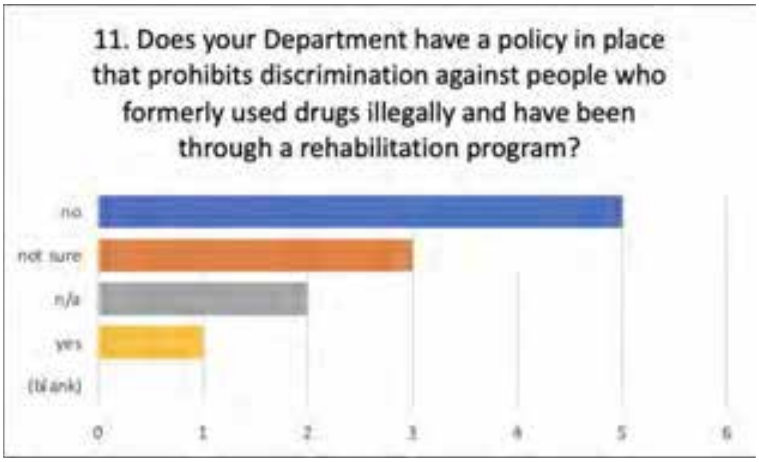

- Question: 11. Does your Department have a policy in place that prohibits discrimination against people who formerly used drugs illegally and have been through a rehabilitation program?
- Responses: no: 5; not sure: 3; n/a: 2; yes: 1
- Comments: One person noted that there is a city-wide policy prohibiting discrimination against people who have formerly used drugs illegally and have been through a rehabilitation program.

Department-Specific Accessibility Survey Responses

The following section addresses survey responses, not already addressed, on a Department-by-Department basis.

1. Police Department

A. Recommendations

- Ensure that the City's first responders and law enforcement are trained regarding: the disability civil rights mandates that the City is held to under State and Federal laws and the best techniques for communication with persons with disabilities.
- With regard to animals of persons involved in arrests, update all policies - including service and emotional support animal policies - to ensure that any animals who may be temporarily sent to Animal Care and Control or any animal shelter are not to be inadvertently euthanized.

- Ensure that City law enforcement personnel are trained in how to safely transport large medical devices such as motorized wheelchairs.

B. Survey Responses & Findings

In addition to many of the above listed sections on communications, etc., the Madera Police Department responded to survey questions specific to law enforcement practices. These responses indicated they were unsure as to whether the Department's first responders had been trained regarding the disability civil rights mandates that the County is held to under State and Federal laws. They also indicated that the City's holding and booking areas had not been reviewed for access since the 2010 ADA Standards for Accessible Design became effective, but that visitor areas were accessible. There is no official policy on how to handle service animals in the event of an arrest/detention of a person with a disability who relies on a service animal. Assistive devices and medications are transported with any detainee. When an officer is giving information (direction or Miranda Rights) to a person with a communication related limitation, the survey response indicated that a phone interpreter could be available, that communication with people who are deaf is very rare, and that access to ASL interpreters is inconsistent. Survey responses indicated that officers have been trained regarding the best techniques for communication with persons with disabilities and officer safety with respect to the following disabilities: developmental disabilities, traumatic brain injury (TBI), learning disabilities, mental disorders.

2. Information Services

A. Recommendations

- Develop and implement regular training on current Web Content Accessibility Guidelines (WCAG).
- Assist City Departments with regular web and digital accessibility testing to ensure the accessibility of websites, software, mobile applications, forms - essentially all digital platforms and interfaces - that may be utilized by employees and/or the public.

B. Survey Responses & Findings

With regard to how Information Services ensure that all Information & Communication Technology services within its purview are fully accessible, IS noted that “We provide only industry standard software. We will address any additional accessibility on an as needed basis.” IS responded in the negative when asked whether they offer and/or receive regular training regarding digital and web accessibility.[i]

Q. Requested Trainings

The following trainings were requested by survey respondents:

- Person First Language training, Accessibility best practices/ADA training.
- “Based on the survey, there are multiple areas.”
- Accessibility for written and electronic documents; developing policy/procedure/process for complaints, accessibility standards, etc.
- Digital and web accessibility best practices.

R. Vetting of Self-Evaluation Results

The City of Madera is committed to the vetting of these results with stakeholders as required by law and developing an implementation plan designed to implement necessary changes and track good-faith compliance efforts.

Vetting Activity

Report Concerning the Self-Evaluation Vetting

- Date(s) and location(s) of vetting
- List of attendees

Input Received During Vetting

Response to Input during Vetting:

Persons Involved in Vetting:

Use of This Self-Evaluation as a Living Document

The ADA requires that a Self-Evaluation be conducted once. Many entities, including the City of Madera, recognize the value of using this document on an ongoing basis. As such, it is available to incorporate new policies as needed in response to emerging issues in case law, new regulations, or the development of, and/or modification of the City's programs. Thus, an addendum to this report can be added as needed to document the City's good-faith effort to make the changes necessary to ensure appropriate access for the public, employees, and visitors to the City of Madera.

S. Staff Who Contributed to this ADA Self-Evaluation

Names	Department
Arnoldo Rodriguez	Administration
Wendy Silva	Human Resources
Eric Battles	Human Resources
Keith Helmuth	Engineering
Ellen Bitter	Engineering
Dino Lawson	Police
Jamie Hickman	Public Works
Mark Souders	Information Services
Jennifer Stickman	Finance, Purchasing
Joseph Hebert	Parks & Community Services
Derrick Sanchez	Parks & Community Services
Anthony Forestiere	Finance
Gary Conte	Planning
Mercedes Bravo	Building
Ralph Duran	Fire
Nicki Rincon	Parks & Community Services
Brandi Garcia	Planning
Anthony Garcia	Fire
Alicia Gonzales	City Clerk
Will Tackett	Community Development

T. Work Plan for the Self-Evaluation Implementation

Provided separately is the City of Madera's ADA Self-Evaluation work plan. It is contained in a spreadsheet designed to be modified as progress is made. It may also be modified when work is necessary that is not identified within the body of this Report. Such instances may occur pursuant to new regulations or case law developments.

The first column will contain a series of recommendations that come from interaction with the City of Madera officials. These are entitled "General Recommendations". The second column is "Action Taken by the City". This column is designed to record whether the City has accepted the recommendation, modified or rejected it. If the recommendation is rejected or modified it would be advisable to record the rationale for this action in the "notes" section, which is the seventh column to the right. Columns

titled "Staff Assigned," “Due Dates,” "Reviewed by,” and “Date” are designed to record progress in the implementation of the ADA Self-Evaluation.

Many of the recommendations are clustered by subject and can be addressed with one staff assignment. Occasionally, there will be one recommended action that addresses several issues noted within the report. For example, disability awareness training benefits the City’s operation in several areas which are noted by findings. The provision of the training, therefore, addresses a wide variety of issues.

It is important that the dates on the work plan are updated each time an entry is made.

APPENDICES

Appendix A: 28 CFR 35.105 Self-Evaluation.

- (a) A public entity shall, within one year of the effective date of this part, evaluate its current services, policies, and practices, and the effects thereof, that do not or may not meet the requirements of this part and, to the extent modification of any such services, policies, and practices is required, the public entity shall proceed to make the necessary modifications.
- (b) A public entity shall provide an opportunity to interested persons, including individuals with disabilities or organizations representing individuals with disabilities, to participate in the Self-Evaluation process by submitting comments.
- (c) A public entity that employs 50 or more persons shall, for at least three years following completion of the Self-Evaluation, maintain on file and make available for public inspection:
    - (1) A list of the interested persons consulted;
    - (2) A description of areas examined and any problems identified; and
    - (3) A description of any modifications made.
- (d) If a public entity has already complied with the Self-Evaluation requirement of a regulation implementing section 504 of the Rehabilitation Act of 1973, then the requirements of this section shall apply only to those policies and practices that were not included in the previous Self-Evaluation.

Appendix B: California Government Code Section 11135

11135. (a) No person in the State of California shall, on the basis of race, national origin, ethnic group identification, religion, age, sex, sexual orientation, color, genetic information, or disability, be unlawfully denied full and equal access to the benefits of, or be unlawfully subjected to discrimination under, any program or activity that is conducted, operated, or administered by the state or by any state agency, is funded directly by the state, or receives any financial assistance from the state. Notwithstanding Section 11000, this section applies to the California State University.

(b) With respect to discrimination on the basis of disability, programs and activities subject to subdivision (a) shall meet the protections and prohibitions contained in Section 202 of the federal Americans with Disabilities Act of 1990 (42 U.S.C. Sec. 12132), and the federal rules and regulations adopted in implementation thereof, except that if the laws of this state prescribe stronger protections and prohibitions, the programs and activities subject to subdivision (a) shall be subject to the stronger protections and prohibitions.

(c) (1) As used in this section, "disability" means any mental or physical disability, as defined in Section 12926.

Appendix C: California Government Code Section 12926

Cal Gov Code § 12926 (2010)

§ 12926. Definitions regarding unlawful practices

As used in this part in connection with unlawful practices, unless a different meaning clearly appears from the context:

(a) "Affirmative relief" or "prospective relief" includes the authority to order reinstatement of an employee, awards of backpay, reimbursement of out-of-pocket expenses, hiring, transfers, reassignments, grants of tenure, promotions, cease and desist orders, posting of notices, training of personnel, testing, expunging of records, reporting of records, and any other similar relief that is intended to correct unlawful practices under this part.

(b) "Age" refers to the chronological age of any individual who has reached his or her 40th birthday.

(c) "Employee" does not include any individual employed by his or her parents, spouse, or child, or any individual employed under a special license in a nonprofit sheltered workshop or rehabilitation facility.

(d) "Employer" includes any person regularly employing five or more persons, or any person acting as an agent of an employer, directly or indirectly, the state or any political or civil subdivision of the state, and cities, except as follows:

"Employer" does not include a religious association or corporation not organized for private profit.

(e) "Employment agency" includes any person undertaking for compensation to procure employees or opportunities to work.

(f) "Essential functions" means the fundamental job duties of the employment position the individual with a disability holds or desires. "Essential functions" does not include the marginal functions of the position.

(1) A job function may be considered essential for any of several reasons, including, but not limited to, any one or more of the following:

(A) The function may be essential because the reason the position exists is to perform that function.

(B) The function may be essential because of the limited number of employees available among whom the performance of that job function can be distributed.

(C) The function may be highly specialized, so that the incumbent in the position is hired for his or her expertise or ability to perform the particular function.

(2) Evidence of whether a particular function is essential includes, but is not limited to, the following:

(A) The employer's judgment as to which functions are essential.

(B) Written job descriptions prepared before advertising or interviewing applicants for the job.

(C) The amount of time spent on the job performing the function.

(D) The consequences of not requiring the incumbent to perform the function.

(E) The terms of a collective bargaining agreement.

(F) The work experiences of past incumbents in the job.

(G) The current work experience of incumbents in similar jobs.

(g) "Labor organization" includes any organization that exists and is constituted for the purpose, in whole or in part, of collective bargaining or of dealing with employers concerning grievances, terms or conditions of employment, or of other mutual aid or protection.

(h) "Medical condition" means either of the following:

(1) Any health impairment related to or associated with a diagnosis of cancer or a record or history of cancer.

(2) Genetic characteristics. For purposes of this section, "genetic characteristics" means either of the following:

(A) Any scientifically or medically identifiable gene or chromosome, or combination or alteration thereof, that is known to be a cause of a disease or disorder in a person or his or her offspring, or that is determined to be associated with a statistically increased risk of development of a disease or disorder, and that is presently not associated with any symptoms of any disease or disorder.

(B) Inherited characteristics that may derive from the individual or family member, that are known to be a cause of a disease or disorder in a person or his or her offspring, or that are determined to be associated with a statistically increased risk of development

of a disease or disorder, and that are presently not associated with any symptoms of any disease or disorder.

(i) "Mental disability" includes, but is not limited to, all of the following:

(1) Having any mental or psychological disorder or condition, such as mental retardation, organic brain syndrome, emotional or mental illness, or specific learning disabilities, that limits a major life activity. For purposes of this section:

(A) "Limits" shall be determined without regard to mitigating measures, such as medications, assistive devices, or reasonable accommodations, unless the mitigating measure itself limits a major life activity.

(B) A mental or psychological disorder or condition limits a major life activity if it makes the achievement of the major life activity difficult.

(C) "Major life activities" shall be broadly construed and shall include physical, mental, and social activities and working.

(2) Any other mental or psychological disorder or condition not described in paragraph (1) that requires special education or related services.

(3) Having a record or history of a mental or psychological disorder or condition described in paragraph (1) or (2), which is known to the employer or other entity covered by this part.

(4) Being regarded or treated by the employer or other entity covered by this part as having, or having had, any mental condition that makes achievement of a major life activity difficult.

(5) Being regarded or treated by the employer or other entity covered by this part as having, or having had, a mental or psychological disorder or condition that has no present disabling effect, but that may become a mental disability as described in paragraph (1) or (2).

"Mental disability" does not include sexual behavior disorders, compulsive gambling, kleptomania, pyromania, or psychoactive substance use disorders resulting from the current unlawful use of controlled substances or other drugs.

(j) "On the bases enumerated in this part" means or refers to discrimination on the basis of one or more of the following: race, religious creed, color, national origin, ancestry, physical disability, mental disability, medical condition, marital status, sex, age, or sexual orientation.

(k) "Physical disability" includes, but is not limited to, all of the following:

(1) Having any physiological disease, disorder, condition, cosmetic disfigurement, or anatomical loss that does both of the following:

(A) Affects one or more of the following body systems: neurological, immunological, musculoskeletal, special sense organs, respiratory, including speech organs, cardiovascular, reproductive, digestive, genitourinary, hemic and lymphatic, skin, and endocrine.

(B) Limits a major life activity. For purposes of this section:

(i) "Limits" shall be determined without regard to mitigating measures such as medications, assistive devices, prosthetics, or reasonable accommodations, unless the mitigating measure itself limits a major life activity.

(ii) A physiological disease, disorder, condition, cosmetic disfigurement, or anatomical loss limits a major life activity if it makes the achievement of the major life activity difficult.

(iii) "Major life activities" shall be broadly construed and includes physical, mental, and social activities and working.

(2) Any other health impairment not described in paragraph (1) that requires special education or related services.

(3) Having a record or history of a disease, disorder, condition, cosmetic disfigurement, anatomical loss, or health impairment described in paragraph (1) or (2), which is known to the employer or other entity covered by this part.

(4) Being regarded or treated by the employer or other entity covered by this part as having, or having had, any physical condition that makes achievement of a major life activity difficult.

(5) Being regarded or treated by the employer or other entity covered by this part as having, or having had, a disease, disorder, condition, cosmetic disfigurement, anatomical loss, or health impairment that has no present disabling effect but may become a physical disability as described in paragraph (1) or (2).

(6) "Physical disability" does not include sexual behavior disorders, compulsive gambling, kleptomania, pyromania, or psychoactive substance use disorders resulting from the current unlawful use of controlled substances or other drugs.

(l) Notwithstanding subdivisions (i) and (k), if the definition of "disability" used in the Americans with Disabilities Act of 1990 (Public Law 101-336) would result in broader protection of the civil rights of individuals with a mental disability or physical disability, as

defined in subdivision (i) or (k), or would include any medical condition not included within those definitions, then that broader protection or coverage shall be deemed incorporated by reference into, and shall prevail over conflicting provisions of, the definitions in subdivisions (i) and (k).

(m) "Race, religious creed, color, national origin, ancestry, physical disability, mental disability, medical condition, marital status, sex, age, or sexual orientation" includes a perception that the person has any of those characteristics or that the person is associated with a person who has, or is perceived to have, any of those characteristics.

(n) "Reasonable accommodation" may include either of the following:

(1) Making existing facilities used by employees readily accessible to, and usable by, individuals with disabilities.

(2) Job restructuring, part-time or modified work schedules, reassignment to a vacant position, acquisition or modification of equipment or devices, adjustment or modifications of examinations, training materials or policies, the provision of qualified readers or interpreters, and other similar accommodations for individuals with disabilities.

(o) "Religious creed," "religion," "religious observance," "religious belief," and "creed" include all aspects of religious belief, observance, and practice.

(p) "Sex" includes, but is not limited to, pregnancy, childbirth, or medical conditions related to pregnancy or childbirth. "Sex" also includes, but is not limited to, a person's gender, as defined in *Section 422.56 of the Penal Code*.

(q) "Sexual orientation" means heterosexuality, homosexuality, and bisexuality.

(r) "Supervisor" means any individual having the authority, in the interest of the employer, to hire, transfer, suspend, lay off, recall, promote, discharge, assign, reward, or discipline other employees, or the responsibility to direct them, or to adjust their grievances, or effectively to recommend that action, if, in connection with the foregoing, the exercise of that authority is not of a merely routine or clerical nature, but requires the use of independent judgment.

(s) "Undue hardship" means an action requiring significant difficulty or expense, when considered in light of the following factors:

(1) The nature and cost of the accommodation needed.

(2) The overall financial resources of the facilities involved in the provision of the reasonable accommodations, the number of persons employed at the facility, and

the effect on expenses and resources or the impact otherwise of these accommodations upon the operation of the facility.

(3) The overall financial resources of the covered entity, the overall size of the business of a covered entity with respect to the number of employees, and the number, type, and location of its facilities.

(4) The type of operations, including the composition, structure, and functions of the workforce of the entity.

(5) The geographic separateness, administrative, or fiscal relationship of the facility or facilities.

HISTORY:

Added Stats 1980 ch 992 § 4. Amended Stats 1985 ch 1151 § 1; Stats 1990 ch 15 § 1 (SB 1027); Stats 1992 ch 911 § 3 (AB 311), ch 912 § 3 (AB 1286), ch 913 § 21.3 (AB 1077); Stats 1993 ch 1214 § 5 (AB 551); Stats 1998 ch 99 § 1 (SB 654); Stats 1999 ch 311 § 2 (SB 1185), ch 591 § 5.1 (AB 1670), ch 592 § 3.7 (AB 1001); Stats 2000 ch 1049 § 5 (AB 2222); Stats 2003 ch 164 § 1 (AB 196); Stats 2004 ch 700 § 4 (SB 1234).

Amendments:

1985 Amendment:

Added **(1)** "or her" after "employed by his" in subd (b); and **(2)** subd (i).

1990 Amendment:

Added subd (j).

1992 Amendment:

(1) Added subd (a); **(2)** redesignated former subds (a)-(d) to be subds (b)-(e); **(3)** amended the introductory clause of subd (d) by **(a)** deleting ", except as hereinafter provided," before "includes"; and **(b)** substituting ", except as follows:" for a period; **(4)** added subdivision designation (d)(1); **(5)** added subd (d)(2); **(6)** added subd (f); **(7)** redesignated former subdivisions (e) and (f) to be subds (g) and (h); **(8)** substituted "includes, but is not limited to," for "means" in subd (h); **(9)** added subd (i); **(10)** redesignated former subd (g) to be subd (j); **(11)** substituted "disability, mental disability" for "handicap" in subd (j); **(12)** substituted subd (k) for former subd (h) which read: "(h) 'Physical handicap' includes impairment of sight, hearing, or speech, or impairment of physical ability because of amputation or loss of function or coordination, or any other health impairment which requires special education or related services."; **(13)** added subds (*l*) and (m); **(14)** redesignated former subds (i) and (j) to be subds (n) and (o); and

(15) added subd (p) and the last paragraph. (As amended 1992 ch 913, compared to the section as it read prior to 1992. This section was also amended by two earlier chapters, ch 911, ch 912. See *Gov C § 9605.*)

1993 Amendment:

(1) Substituted "functions" for "duties" after "Essential" both times it appears in subd (f); **(2)** deleted ", but is not limited to," after "includes" in subd (h); **(3)** deleted former subd (*l*) which read: "(*l*) 'Reasonable accommodation' may include either of the following:

"(1) Making existing facilities used by employees readily accessible to, and usable by, individuals with disabilities.

"(2) Job restructuring, part-time or modified work schedules, reassignment to a vacant position, acquisition or modification of equipment or devices, adjustment or modifications of examinations, training materials or policies, the provision of qualified readers or interpreters, and other similar accommodations for individuals with disabilities. It is the intent of the Legislature that the definition of 'physical disability' in this subdivision shall have the same meaning as the term 'physical handicap' formerly defined by this subdivision and construed in *American National Ins. Co. v. Fair Employment & Housing Com., 32 Cal. 3d 603.* However, 'physical disability' does not include conditions excluded from the federal definition of 'disability' pursuant to Section 511 of the Americans with Disabilities Act of 1990 *(42 U.S.C., § 12211).* Additionally, for purposes of this part, the unlawful use of controlled substances or other drugs shall not be deemed, in and of itself, to constitute a physical disability."; **(4)** designated the former last paragraph in the section to be subd (*l*); and **(5)** substituted "of" for "or" after "size of the business" in subd (p)(3).

1998 Amendment:

(1) Amended subd (d) by **(a)** substituting the comma after "indirectly" for the semicolon; and **(b)** adding the comma after "thereof"; **(2)** substituted "that" for "which" after "organization" in subd (g); **(3)** amended subd (h) by adding **(a)** "(1) genetic characteristics, or (2)" after "include" in the first sentence; and **(b)** the second sentence; and **(4)** added "and" before "(5) the geographic" in subd (p).

1999 Amendment:

(1) Amended subd (d) by **(a)** substituting "of the state" for "thereof" in the introductory clause; **(b)** deleting subdivision designation (d)(1) at the beginning of the second paragraph; and **(c)** deleting former subd (d)(2) which read: "(2) 'Employer,' for purposes of provisions defining unlawful employment practices related to mental

disability, means any person regularly employing 15 or more persons, or any person directly or indirectly acting as an agent of such an employer, and also includes the state and municipalities and political subdivisions of the state."; **(2)** substituted subd (h) for former subd (h) which read: "(h) 'Medical condition' includes (1) genetic characteristics, or (2) any health impairment related to or associated with a diagnosis of cancer, for which a person has been rehabilitated or cured, based on competent medical evidence. For purposes of this section, 'genetic characteristics' means any scientifically or medically identifiable gene or chromosome, or combination or alteration thereof, that is known to be a cause of a disease or disorder in a person or his or her offspring, or is determined to be associated with a statistically increased risk of development of a disease or disorder, or inherited characteristics that may derive from the individual or family member, that is presently not associated with any symptoms of any disease or order."; **(3)** substituted "or age" at the end of subd (j); **(4)** added subd (m); **(5)** redesignated former subds (m)-(o) to be subds (n)-(p); **(6)** added subds (q) and (r); and **(7)** redesignated former subd (p) to be subd (s). (As amended Stats 1999 ch 592, compared to the section as it read prior to 1999. This section was also amended by two earlier chapters, ch 311 and ch 591. See *Gov C § 9605*.)

2000 Amendment:

(1) Amended subd (h) by **(a)** adding "means" in the introductory clause; and **(b)** substituting "cancer or a record or history of cancer" for ", for which a person has been rehabilitated or cured, based on competent medical evidence" in subd (h)(1); **(2)** substituted subd (i) for former subd (i) which read: "(i) 'Mental disability' includes any mental or psychological disorder, such as mental retardation, organic brain syndrome, emotional or mental illness, and specific learning disabilities. However, 'mental disability' does not include conditions excluded from the federal definition of 'disability' pursuant to Section 511 of the Americans with Disabilities Act of 1990 *(42 U.S.C. Sec. 12211).* Additionally, for purposes of this part, the unlawful use of controlled substances or other drugs shall not be deemed, in and of itself, to constitute a mental disability."; and **(3)** substituted subd (k) for former subd (k) which read: "(k) 'Physical disability' includes, but is not limited to, all of the following:

"(1) Having any physiological disease, disorder, condition, cosmetic disfigurement, or anatomical loss that does both of the following:

"(A) Affects one or more of the following body systems: neurological, immunological, musculoskeletal, special sense organs, respiratory, including speech organs, cardiovascular, reproductive, digestive, genitourinary, hemic and lymphatic, skin, and endocrine.

"(B) Limits an individual's ability to participate in major life activities.

"(2) Any other healthy impairment not described in paragraph (1) that requires special education or related services.

"(3) Being regarded as having or having had a disease, disorder, condition, cosmetic disfigurement, anatomical loss, or health impairment described in paragraph (1) and (2).

"(4) Being regarded as having, or having had, a disease, disorder, condition, cosmetic disfigurement, anatomical loss, or health impairment that has no present disabling effect but may become a physical disability as described in paragraph (1) or (2).

"It is the intent of the Legislature that the definition of 'physical disability' in this subdivision shall have the same meaning as the term 'physical handicap' formerly defined by this subdivision and construed in *American National Ins. Co. v. Fair Employment & Housing Com. (1982) 32 Cal. 3d 603.* However, 'physical disability' does not include conditions excluded from the federal definition of 'disability' pursuant to Section 511 of the Americans with Disabilities Act of 1990 (42 U.S.C., Sec 12211). Additionally, for purposes of this part, the unlawful use of controlled substances or other drugs shall not be deemed, in and of itself, to constitute a physical disability."

2003 Amendment:

(1) Added the second sentence of subd (p); and **(2)** amended subd (s) by substituting **(a)** "The" for "the" at the beginning of subds (s)(1)-(s)(5); and **(b)** the period for the comma at the end of subds (s)(1)-(s)(3) and the period for ", and" at the end of subd (s)(4).

2004 Amendment:

Substituted "*Section 422.56 of the Penal Code*" for "*Section 422.76 of the Penal Code*, except that, for purposes of this part, the reference in that definition to the "victim" shall mean the employee or applicant and the reference in that definition to the "defendant" shall mean the employer or other covered entity or person subject to applicable prohibitions under this part" in subd (p).

Appendix D: Sample Notice of Compliance Under ADA & California State Law

The City of Madera

Notice of Compliance Under ADA & California State Law

In accordance with the requirements of Title II of the Americans with Disabilities Act (ADA) of 1990, the Americans with Disabilities Amendments Act of 2008, the Fair Employment & Housing Act (FEHA), California Government Code Section 11135 and other applicable codes, the City of Madera does not discriminate against individuals on the basis of disability in its services, programs or activities.

Employment: the City of Madera does not discriminate on the basis of disability in its hiring or employment practices and will comply with the Fair Employment and Housing Act, as well as Title I of the ADA, including the regulations promulgated by the U.S. Equal Employment Opportunity Commission (EEOC), including the requirement to provide reasonable accommodations.

Effective Communication: the City of Madera will generally, upon request, provide appropriate aids and services leading to effective communication for qualified persons with disabilities, including sign language interpreters, documents in Braille and other alternate formats to ensure information and communication is accessible to people who have speech, hearing, vision, or cognitive impairments so they can participate equally in the programs, services and activities.

Modification to Policies and Procedures: the City of Madera will make reasonable modifications to policies and programs to ensure that people with disabilities have an equal opportunity to participate in all of its programs, services and activities. *For example, individuals with service animals behaving within applicable standards are welcome in offices and City facilities, even when pets are generally prohibited.*

Anyone who requires auxiliary aids and services for effective communication, or a modification of policies or procedures to participate in a program, service or activity in the City of Madera should communicate with the Disability Manager contact as soon as possible, but no later than **72 hours** before the scheduled event.

Neither the ADA, nor state law requires the City of Madera to take action that would fundamentally alter the nature of its programs, activities or services or impose an undue financial or administrative burden. Complaints that a program, activity or service of the City of Madera is not accessible should be directed to Director of Human Resources, Wendy Silva, p. (559) 661.5400 option 8, hrinfo@madera.gov.

The City of Madera will not place a surcharge on a particular individual with a disability or a group of individuals with disabilities to cover the cost of providing auxiliary aids and services or making a reasonable modification to a policy to create access.

Appendix E: Sample Grievance Procedure

Grievance Procedure under ADA or California State Disability Civil Rights Laws

This grievance procedure is established to meet the requirements of the Americans with Disabilities Act of 1990 ("ADA"), the Americans with Disabilities Amendments Act (ADAAA) and California State law. It may be used by anyone wishing to file a complaint alleging discrimination on the basis of disability in the provision of services, activities, programs or benefits by the City of Madera. The City's Disability Discrimination Policy governs employment-related complaints of disability discrimination.

1. The complaint should be in writing and contain information about the alleged discrimination such as name, address, phone number of the complainant and location, date and a description of the problem(s). The City's Grievance Procedure form is available online at https://www.madera.gov/home/departments/human-resources/ada-advisory-council/. Alternative means of filing a complaint, such as personal interviews or a tape recording of the complaint, are available to persons with disabilities upon request.
2. The complaint should be submitted by the grievant and/or his/her designee as soon as possible, but no later than 60 calendar days after the alleged violation to the City's ADA Coordinator. The contact information is:
   Wendy Silva, Director of Human Resources
   205 W. 4th Street
   Madera, CA 93637
   Phone: (559) 661-5400, option 8
   Email: hrinfo@madera.gov
3. An investigation, as may be appropriate, shall follow the filing of a complaint. The appropriate investigation will be conducted by the ADA Coordinator or a designated representative. These rules contemplate an informal but thorough investigation affording all interested persons an opportunity to submit evidence relevant to a complaint. Under 24 CFR 8.53, the City need not process complaints from applicants for employment or housing. Such complaints will be referred to the California Civil Rights Department.
4. A written determination as to the validity of the compliant and a description of resolution, if any, shall be issued by the ADA Coordinator and a copy forwarded to the complainant no later than 30 calendar days after its filing.
5. The complainant may appeal the ADA Coordinator's decision to the City Manager within 10 calendar days of receipt of the decision. The City Manager will review the decision and within 30 days provide complainant with a written response to the appeal.
6. The complainant may appeal the decision of the City Manager by filing an appeal with the City Council. All such appeals must be submitted within 10 days of the

complainant's receipt of the decision from the City Manager. Such appeals will be heard by the City of Madera ADA Advisory Council at its next regularly scheduled meeting. The City of Madera ADA Advisory Council will make findings and recommendations in writing regarding the complaint and appeal, and such findings and recommendations will be forwarded to the City Council at its next regularly scheduled meeting for which an agenda has not already been published. The City Council will consider the findings and recommendations of the City of Madera ADA Advisory Council and make a final decision regarding the complaint and the matter will be closed. The City Council's decision will be provided in writing to the complainant within 10 calendar days after the matter is heard at a public meeting.

Appendix F: City of Madera Grievance Form

ADA Grievance Form

Today's Date _____

The City of Madera ADA Advisory (MADAAC) wants to know where you are experiencing barriers in the City of Madera under ADA Title II. Title II of the ADA covers programs, activities, and services of public entities.

What barriers have you experienced in accessing City programs, activities, or services? Examples may include sidewalks, buildings, crosswalks, parks, program activities, etc. Please use the map on the back to show location, if appropriate.

_____
_____
_____
_____
_____

_____

What do you feel is the appropriate solution or remedy to your barrier?

_____
_____
_____
_____
_____

Your concerns will be reviewed by the Madera ADA Advisory Council and directed to the correct city department. In case we have questions, please provide your information below:

Name _____ Phone _____
Email_____
Thank you!
The City of Madera ADA Advisory Council
Please use the box below to help the City identify the location of your concern. Draw the area surrounding your area to the best of your ability. Examples are provided at the bottom as a reference.

Location Name: _____

N

Examples:

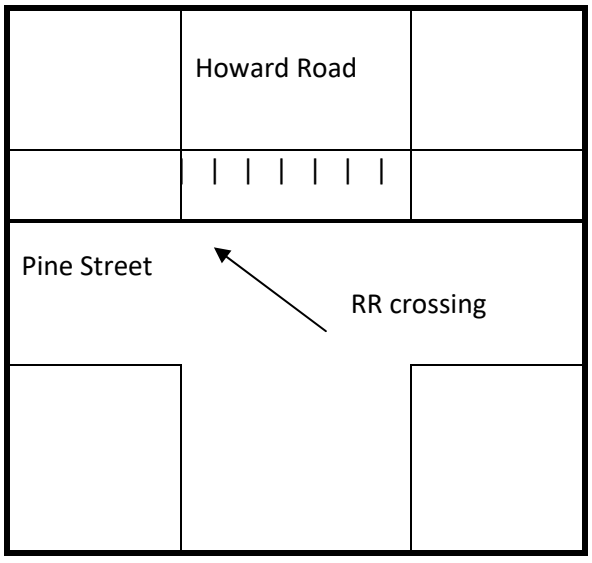

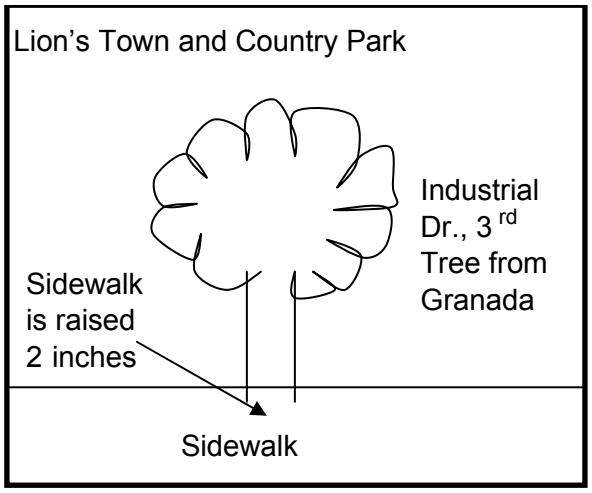

Appendix G: City of Madera ADA Coordinator

Contact Information for the Director of Human Resources:

Wendy Silva

205 West 4th Street, Madera, CA, 93637

Phone: 558-661-5400, option 8

Email: hrinfo@madera.gov

Appendix H: Self-Evaluation Survey Questions

Printed Communications

1. Do all of your Department's printed publications and notices inform readers that the publications are available in alternative formats, if needed, for persons with disabilities?
    a. If yes, is this mandated by the City or specific to your Department?
    b. If yes, is the notification language standard to the City or created by your Department?
    c. If yes, please provide a copy of the text offering alternative formats.
2. Do all of your Department's printed publications and notices use a certain font type and size for City published documents?
    a. If yes, what font type and size is used?
    b. If yes, is this mandated by the City or specific to your Department?
3. Has your Department reviewed all publications and notices to determine whether they portray persons with disabilities in a demeaning or offensive manner?
    a. If yes, when was this review last performed?
    b. If yes, how regularly is this review performed?
4. Has your Department trained its staff to ensure that all publications and correspondence use "person first language"?
    a. If yes, is this training provided by the City or the Department?
    b. If yes, how often are staff provided this training, and how is this training tracked and recorded?

Communication With People Who are Deaf or Hard of Hearing (DHH)

1. Does your Department list "711 the California Relay" on business cards and letterheads?
2. Are your Department's telephone lines accessible to persons who are DHH?

    a. If yes, please describe how the Department ensures this accessibility.
    b. If yes, how often are your Department's telephone lines tested to ensure accessibility?
3. Has your Department identified local resources that can provide auxiliary aids for communication as needed?
    a. If yes, please describe.
    b. If yes, please describe how the public is informed of these resources, and how they are informed on how to request them.
4. If your Department uses video for any reason or in any forum (e.g. internal employee training, public outreach via the web on social media, YouTube, etc.) is that video captioned?
    a. If yes, please describe how the Department ensures that video is captioned, including any processes or vendors utilized to caption videos.
    b. If yes, are videos captioned before use, or at some later date after they have been released?
5. Does your Department have a policy in place for securing video remote interpreting services (VRI)?
    a. If yes, please attach a copy of the policy and/or describe in detail.
6. If your Department has a Public Information Officer that communicates with the press and releases critical information, is an American Sign Language interpreter visible and within the screenshot if television cameras are in use or is a captioning service used?
7. Does the Department play videos in public spaces, e.g. waiting rooms or lobbies, for the public?
    a. If so, are these videos captioned?
8. Does the Department use any public address systems?
    a. If so, how does the Department ensure that information broadcast by these systems is available to people who may be DHH?

Software & Digital Communication

1. Does the Department ensure that its webpage is accessible to persons with disabilities by applying Web Content Accessibility Guidelines (WCAG)?
    a. If yes, is this mandated by the City?
    b. If yes, how does the Department make sure its webpage meets the WCAG?
    c. If yes, how does the Department ensure that any updates meet the WCAG?
    d. If yes, what version of the WCAG does the Department apply to its webpage access requirements?
2. Does the Department use any web-based forms for use internally or by the public?
    a. If yes, how does the Department ensure that these meet WCAG?
3. Does the Department use any internally-developed software, including mobile applications and payment systems, either internally or externally?
    a. If yes, how does the Department ensure that these meet WCAG?
4. Does the Department use any third party software, including mobile applications and payment systems, either internally or externally?
    a. If yes, how does the Department ensure that these meet WCAG?
5. Does the Department use any touch screen information systems for public interaction?
    a. If yes, is there an independent operating system for persons with visual impairments?
6. Does the Department offer any type of computer or digital device for use by the public?
    a. If yes, are they equipped with software that makes them accessible to persons with visual impairments?
    b. If yes, how does the Department ensure that these devices and the software on them is accessible?
7. In email communications (both internal and external), does the Department ensure that all communications – including attachments – comply with WCAG?

a. Are PDFs checked for accessibility?
b. Are PDFs also sent out as Word documents?
c. Are all photos captioned with descriptive text?

Staff & Employees

1. Does the Department affirmatively recruit persons with disabilities for available positions?
    a. If yes, please describe these efforts and outreach.
2. Does the Department ensure that all of its job listings are accessible to persons with disabilities?
    a. If yes, please describe, and attach any pertinent documents.
3. Do Department job listings contain a statement of non-discrimination against persons with disabilities?
    a. If yes, please provide a copy (or text) of this statement.
4. Does the Department offer candidates for employment the opportunity to request reasonable accommodation?
    a. If yes, please describe, and attach any pertinent documents.
5. Are interview panel members trained regarding disability awareness and appropriate interactions with people with disabilities?
    a. If yes, please describe the training, including how often it is offered, and how attendance is tracked and recorded.
    b. If yes, please attach copies of any pertinent documents.
6. When your department conducts employment interviews, is the decision to hire based upon which candidate is best qualified to perform the essential functions of the job with or without reasonable accommodations?
7. How are the essential functions of a position determined?
8. Does the Department offer Staff and Employees an opportunity to self-identify as a person with a disability?
9. How does the Department ensure that all employee events (e.g. holiday parties), are fully accessible?

10. Does the Department offer training on accessibility best practices and/or the ADA to staff, employees and/or volunteers?
    a. If so, how often is this training offered?
    b. If so, is this training optional or mandatory?
    c. If so, how is attendance tracked and recorded?
    d. Please provide a copy of all training(s).
11. Does the Department ensure that all opportunities for advancement and education are available and accessible to Staff and Employees who may have a disability? This includes, but is not limited to certifications, workshops, trainings, conferences, meetings, etc.
12. Does the Department have a process for its staff and/or employees to request a reasonable accommodation?
    a. Please describe and/or attach copies of any pertinent policies or procedures.
    b. Please also fully describe the interactive process, as well as how documentation regarding these processes are maintained.
13. Does the Department's reasonable accommodation process include a search for transfer into a vacant, funded role as an accommodation of last resort?
    a. If yes, please provide all Departmental documentation and guidance regarding this process.
    b. If yes, please describe in detail how this process is implemented, including how long a search is conducted, and what criteria are utilized to determine whether a transfer is appropriate and can be achieved.
    c. If yes, does the Department require persons seeking this reasonable accommodation to compete for the vacant role?
14. If reasonable modifications are used to create access, are they approved before they are put in place?
    a. If yes, by whom? Please include name, position and contact information
15. When reasonable modifications are put in place, are they documented to ensure staff implements them appropriately?

a. If yes, how is the reasonable modification(s) documented? What information is included in the documentation?

16. Does the Department ensure that it's facilities and offices are fully accessible? Please describe.
17. Is there an anti-disability harassment policy? If yes, when was it last updated? Please attach the policy.
    a. Is it based upon zero tolerance or the legal definition of disability harassment?
    b. How often is it disseminated to all staff?
18. Does your Department's grievance system:
    a. Offer assistance to people with disabilities who, due to their disability, are not able to independently complete the grievance?
    b. Provide timelines when a complainant can expect a result?
    c. Have a second level of review? If yes, please state the position responsible.
    d. Contain a notice regarding availability of the grievance system in alternative formats: braille, large print, audio?
    e. Contain the name and contact information of the ADA Coordinator?
19. Has your Department received any complaints or grievances regarding failure to reasonably accommodate and/or lack of accessibility by candidates, employees, or visitors to any of your offices?
    a. If yes, please describe these including how they were resolved.
20. Does your Department supervise any maintenance staff?
    a. If yes, do maintenance staff receive training regarding maintaining an accessible built environment?
21. Does the Department have a policy regarding service and/or support animals for its employees?
    a. If yes, please provide a copy of the relevant policies.

Information Technology

1. How does IT ensure that all Information & Communication Technology services within its purview are fully accessible?
2. How does IT ensure that all mobile applications developed on your behalf are fully accessible?
3. What version of the Web Content Accessibility Guidelines (WCAG) does IT apply in software development?
4. Have you ever received any complaints regarding a lack of digital / web accessibility by any of your employees, volunteers, users?
    a. If yes, please describe, and include how these complaints were resolved.
5. How and how often does IT conduct accessibility checks, and how encompassing are these checks?
6. Does the IT Department offer and/or receive regular training regarding digital and web accessibility?
    a. If yes, please describe the training, provide copies of any relevant documents, and describe how training is tracked and recorded.

Purchasing, Contracts, Vendors

1. When the purchase of new equipment is made, (purchases including, but not limited to, communication and transportation equipment) is it reviewed to ensure the equipment is accessible to users with disabilities?
    a. If yes, please describe how accessibility reviews of new equipment are performed.
2. Are all public documents related to bidding and contracting available to persons with disabilities in alternative format if needed?
3. Are meetings related to bidding and contracting held in accessible locations?
4. Do all City contracts have language in place holding contractors and vendors to applicable State and Federal disability civil rights mandates?
    a. If yes, how is this enforced?

5. How does the Department ensure that all products and services offered by third parties and vendors are fully accessible?
6. Is an accessibility plan check done when vendors are conducting tenant improvements in public service areas?
7. Is guidance in place for staff and vendors regarding clear space and furniture placement?
    a. If yes, when was it last updated? Please attach the guidance.
8. If an employee or member of the public with a disability believes they have been discriminated against by a City vendor or contractor, what steps are available to them to remedy their concerns?

Construction and Remodels

1. Do all design contracts hold design professionals to designs that use, at minimum, the most stringent access standards in effect at the time of the project?
2. Do design contracts encourage design professionals to exceed the maximum access standards when possible to ensure that construction tolerances are built into the project?
3. Is a policy in place that mandates CASp inspections at key points of construction and at completion, before final payment is made?
4. Are major public projects reviewed by stakeholders with disabilities during the planning stage?

General Purchases

1. When purchasing items for installation, what checks are in place to ensure installation will be compliant with current building standards? (e.g. toilet paper dispensers must be located below the grab bar; items may not protrude more than 4” from the wall in a path of travel if they are placed at an elevation above 27” or below 80”; clear space available for a wheelchair user to approach the item for use; an item must not require a person to reach higher than 48” or lower than 15” to operate unless the user must reach over other items to operate, etc.)

a. Please describe how you ensure that purchased and installed items are compliant with current building standards.
b. Please describe how you ensure that purchased and installed items are *maintained* so as to ensure current building standards (e.g. waste baskets are not kept in required maneuvering clearances; subsequently installed items do not obstruct clear spaces and reach ranges, etc.)

2. When purchasing an item that contains an operational part, do you consider accessibility requirements, e.g. ability to operate with one hand; maximum 5lbs operational pressure; no grasping, pinching, and twisting; etc.)?
    a. If yes, please describe how these considerations are made and implemented.
    b. If yes, how does the Department ensure that any operable part is *maintained* to remain accessible (e.g. parts do not get rusty, stuck, or otherwise outside operable part accessibility requirements)?
3. When furniture is purchased, does the Department consider accessibility factors such as is knee clearance for tables and clear space within a room?
    a. If yes, please describe how these considerations are made and implemented.
    b. If yes, please describe how these features are maintained (e.g. items are not placed beneath tables which may obstruct knee clearances, or additional furniture is added to a room which may obstruct clear space).

Facilities and Real Estate Management

1. Does your Department ensure accessibility of any public rights of way (PRoW)?
    a. If yes, please describe how your Department achieves this, including accessibility requirements of sidewalks, parking lots, paths of travel to and from Department facilities.

b. If yes, please provide a copy of any policies and/or Department procedures, and include information on when these were last updated.
c. If yes, please describe how the Department monitors PRoW for accessibility issues, including but not limited to broken sidewalks, PRoW obstructions (including temporary obstructions), and overhangs into the PRoW that interfere with clear head space.
d. If yes, does your Department receive complaints from the public regarding inaccessible PRoW? How does the Department ensure that methods for receiving these complaints (e.g. via telephone, web-based forms, email) are accessible to people with disabilities?

2. Does your Department have an accessibility construction inspection checklist for use by building code officials/building inspectors as a reference guide to assist with on-site inspection of accessibility features and construction elements affecting accessibility compliance to your facilities?
    a. If yes, when was it last updated? Please attach a copy of the checklist.
3. Is there a policy and/or procedure in place ensuring proper maintenance of accessible features?
    a. If yes, when was this last updated?
    b. If yes, how are the relevant staff made aware of these policies and procedures?
    c. If yes, how are these policies and/or procedures enforced?
    d. Please attach a copy of the policy and procedure.

Planning, Construction, Buildings

1. When examining plans, does the Department evaluate accessibility requirements?
    a. If so, please describe how the Department does this, and please attach any relevant Departmental documentation (e.g. guidelines, checklists, procedures).
2. During construction, does the Department evaluate construction sites for accessible paths of travel along public rights of way for persons with disabilities?

    a. If so, please describe how the Department does this, and please attach any relevant Departmental documentation (e.g. guidelines, checklists, procedures).
3. Does the Department receive public complaints regarding building accessibility for persons with disabilities?
    a. If so, please describe how these are submitted to the Department by the public.
    b. If so, please provide examples of complaints, including how those were resolved.
    c. If so, please provide any relevant Departmental documentation, including intake forms, internal processes, etc.)
4. Does the Department have any staff or employees who evaluate accessibility of built environments for persons with disabilities?
    a. If so, please provide supplemental information, e.g. # of FTEs, certifications required, job description(s).

Capital Projects

1. Does your department have an accessibility checklist for that it uses for all Capital projects?
    a. If yes, please attach a copy of this checklist and/or any pertinent documentation.
    b. If yes, when was this last updated?
    c. If yes, how does your Department ensure that accessibility is implemented in all Capital projects?

Public Meetings

1. Does the Department hold or sponsor events that are available to the public?
    a. If yes, please continue with the questions in this section.
    b. If no, please skip this section.
2. Does the Department have an event planning accessibility checklist to ensure that all public meetings and events are fully accessible?

    a. If yes, please provide a copy of this checklist.
    b. If yes, is this checklist maintained by the Department or the City?
3. If security checks are required to attend any public function, are security personnel trained in best practices for conducting security checks for persons with disabilities?
    a. If yes, please describe or provide a copy of this training, including how often it is updated and offered, and how attendance is tracked and recorded.
4. Do all meeting notices contain an announcement that reasonable accommodations are available for persons with disabilities as needed and/or upon request?
    a. If so, please provide a copy of the text that is included in all notices of public meetings.
5. Are all persons who administer public meetings trained in how to respond to requests for reasonable accommodations by members of the public?
    a. If so, please describe what training is provided, including how often it is provided and how attendance is tracked and recorded.
6. Does the Department take steps to ensure that all meetings are held in buildings and rooms that are fully accessible?
    a. If so, please describe how the physical accessibility of public meeting spaces (including: paths of travel; entrances; circulation routes; registration counters or tables; building amenities such as water fountains, restrooms and public telephones; and seating) is evaluated and implemented.
    b. Is staff trained to set up meeting rooms to provide maneuvering space for persons who use wheelchairs or service animals?
7. Are the indoor or outdoor surfaces where persons with disabilities will travel smooth, stable and slip resistant?
8. Are public meetings held on sites that are accessible by public transportation?
    a. If no, please explain why not.

9. Do public meeting notices contain language indicating that service animals are welcome?
    a. If so, please provide the text of this notification.
10. Are service animal relief areas identified before every public meeting?
11. Are emergency exits identified before every public meeting?
12. Are stages, speaking platforms, microphones and other items to be used by persons with disabilities accessible?
    a. Note: When considering microphone access please take into account podium elevations, touch screen control systems, gooseneck microphone attached to the center of tables without knee clearance for wheelchair users, and persons who will not be able to hand hold any equipment.
13. Do all public meetings have reserved seating for people who use wheelchairs?
    a. Does this reserved seating also include integrated companion seating?
14. Are all presenters at public meetings trained on best practices for presenting content to persons with disabilities, eg. reading powerpoints aloud?
    a. If yes, how and how often are these trainings offered, and how is attendance tracked and recorded?
15. Are FM Loop systems (Assistive Listening Devices) available for persons who are hard of hearing?
    a. If FM Loop systems are being used, do meeting hosts ensure that all comments made during the meeting go through the PA system?
    b. If FM Loop systems are used, are all meeting hosts trained on how to operate these? How often, and how is this training tracked and recorded?
16. Are sign language interpreters and/or real-time captioners available for all public meetings?
    a. If yes, please indicate how these resources are made known and available to the public.
    b. If yes, is there reserved seating at the front of the room for persons needing these accommodations?
    c. If yes, are sign language interpreters positioned beneath adequate lighting, and close to the speaker?

d. If yes, are two sign language interpreters retained for meetings or events lasting more than two hours?
e. If yes, are sign language interpreters and real time captioners provided information before the meeting/event regarding any unusual terms or difficult to spell names that will be part of the program?

17. What processes are in place to ensure that people with disabilities are able to participate in public speaking at all events, e.g. public comment?
    a. Please describe in detail, and answer the additional questions, below.
    b. If speaker cards are used, is staff available to assist persons with disabilities, as needed, in completing the cards?
    c. Are podiums or dais' used for public speaking or public comment accessible (e.g. lowered podiums, adjustable microphones, etc.)?
    d. If public comment time is limited, is the time increased for persons who have speech impairments?
18. Do any public events utilize security measures (e.g. magnometers, wands, bag checks)?
    a. If yes, are Security personnel trained in best practices for conducting security checks of persons with disabilities?
    b. If training is provided, please describe or provide a copy of that training, including how and how often it is offered, and how attendance is tracked and recorded.
19. What processes are in place to ensure that exhibits, displays, and other materials offered to the public are fully accessible?
    a. If events include displays, are the displays accessible and on an accessible route?
    b. If parts of an exhibit are inaccessible due to technical infeasibility, is video with captioning used to display the exhibit?
    c. Are all brochure racks, holders and literature displays accessible to people with disabilities, including, e.g. all materials on an accessible route, with appropriate reach ranges and clear floor space?

Emergency Procedures

1. Does your Department have procedures in place regarding the evacuation of persons with disabilities?
    a. If yes, please describe and/or provide a copy of those procedures.
    b. If yes, how often are relevant Department staff trained on those procedures, and how is this training tracked and recorded?
    c. If staff are trained on these procedures, how often is this training updated and/or reviewed?
2. Does your Department utilize Department vehicles for transporting civilians in any instance, including emergency evacuation incidents?
    a. If yes, are transport vehicles equipped to transport persons with disabilities? (Please describe in detail, if applicable).
    b. If yes, are relevant Department staff trained in how to transport persons with disabilities? (Please describe in detail, if applicable).
3. Does your Department work in partnership with other entities regarding the set up and administration of evacuation shelters or centers?
    a. If yes, please describe the Department's role in this partnership.
    b. If yes, does the Department have a checklist regarding accessibility at evacuation shelters or centers? (Please provide a copy of that checklist, if applicable).

Custody

1. Have the Department's first responders been trained regarding the disability civil rights mandates that the City is held to under State and Federal laws?
2. Have holding and booking areas been reviewed for access since the 2010 ADA Standards for Accessible Design became effective?
    a. If visitor areas are offered, are they accessible?
3. If inmate phone systems are provided, is there a phone system for inmates who are deaf or hard of hearing?
4. When arrests are made:
    a. How are service animals dealt with?

    b. How are medical appliances (canes, walkers, hearing aids, oxygen tanks, etc.) addressed?
    c. How are power wheelchairs, scooters and other large mobility devices transported after an arrest?
    d. How are medication needs handled?
5. When an officer is giving information (direction or Miranda Rights) to a person with a communication related limitation, how is it determined that the person understands the information being communicated?
6. How do officers communicate with persons who are deaf?
7. Does the 911 system have TTY? If yes, how often does training occur regarding its use?
8. Is there a procedure in place for officers to obtain a sign language interpreter when one is needed on an emergency basis?
9. Have officers been trained regarding the best techniques for communication with persons with disabilities and officer safety? If yes, were the following disabilities covered?
    a. Vision Impairments
    b. Deaf, Hard of hearing and Speech Impairments
    c. Developmental Disabilities
    d. Traumatic Brain Injury
    e. Post-Traumatic Stress Disorder
    f. Learning Disabilities
    g. Mobility Impairments
    h. Multiple Chemical Sensitivities
    i. Mental Disorders
    j. Competing Disabilities (i.e. someone is on the bus with a service dog and another person on the bus has a phobic response to the dog and wants it removed as an accommodation. Both have rights to be considered. The passengers are in conflict)
10. Are there other issues you feel should be addressed in dealing with disability civil rights and your role within the City? If yes, please explain.

Records

1. In what format does your Department maintain records that are available to the public? (e.g. hard copy, digital).
2. How does your Department ensure that digital records are fully accessible to persons with disabilities?
3. Does your Department permit members of the public to visit your facility or facilities to physically examine hard copies (printed) records?
    a. If so, how does your Department ensure that public records' examination areas are accessible to persons with disabilities?
4. Does your Department offer assistance to persons with disabilities with regard to public records services, e.g. filing, requesting documents, reviewing documents?
    a. If so, please describe the assistance you offer, including how this assistance is publicized and how the public may make a request for assistance.

Other

1. Does your Department have an ADA Notice of Compliance posted?

    a. If yes, please describe where this notice is posted.

2. Does your Department have any policies regarding service and/or emotional support animals for its employees and/or the public?

    a. If yes, please describe and provide a copy of any pertinent documentation.

3. If your Department offers public services on site, e.g. intake and counseling, please describe how your Department ensures that these services are fully accessible.

4. Does your Department offer transportation services?

    a. If yes, please describe how the Department ensures that these services are fully accessible to persons with disabilities.

5. Does your Department have electronic informational kiosks?
    a. If yes, are they accessible to people with disabilities?
6. Does your Department offer printed informational brochures to the public?
    a. If yes, are these offered in large print formats?
    b. If yes, are these brochures offered in accessible locations (e.g. with adequate clear floor space and within reach ranges for persons who use mobility devices)?
7. Does your Department issue any warnings, penalties and/or citations?
    a. If yes, how do you ensure that people with disabilities are able to access the information included on these documents (e.g. persons who may be blind or visually impaired)?
8. Does your Department offer or host any trainings, meetings, or other events available to the public?
    a. If yes, does your Department have a checklist to ensure accessibility? Please attach.
    b. If yes, are these events in accessible facilities?
    c. If yes, are these event facilities on public transportation routes?
9. Is your Department is involved in automation initiatives (e.g. web and mobile applications) that interface with the public?
    a. If yes, how do you ensure that these are fully accessible to persons with disabilities?
10. How does your Department receive complaints of lack of accessibility or requests for reasonable accommodation from the public?
    a. Please attach any pertinent policies and/or procedures.
11. Has your Department received any complaints regarding a failure to reasonably accommodate or lack of accessibility?
    a. If yes, please describe how these were resolved.
12. Does your Department have a policy in place that prohibits discrimination against people who <u>formerly</u> used drugs illegally and have been through a rehabilitation program?

a. If yes, when was it last updated?

b. Please attach a copy of the policy.

13. Based on all of the above, are there areas where you feel training of Department staff would be beneficial?
    a. If yes, please list the areas of training you think may be useful.

Appendix I: List of documents appended to survey responses

1. **On behalf of the City Clerk's office:**
    a. **Sample City Council Agenda, see last page for language regarding requesting accommodations**
2. **On behalf of City Hall departments (shared postings/facility):**
    a. **Picture of ADA compliance posting**
    b. **Picture of Council Chambers designated seating**
    c. **Picture of posting on how to obtain CASp Inspection Services**
    d. **Picture of posting on Equal Housing Opportunity**
3. **On behalf of Madera Police Department**
    a. **Excerpts from policy manual (4 attachments)**
    b. **Sample training – scenario-based training on policy manual and training on employment/hiring**
    c. **MPD Policy 370**
    d. **MPD Policy 1054**
4. **On behalf of Madera City Fire (staffed by CalFire)**
    a. **Sample training and certification on web communication (2 documents)**
5. **On behalf of Building**
    a. **Additional documents following our last call (4 attachments)**
6. **On behalf of Planning**
    a. **15 attachments from application packets, corresponding checklists, and an example of a typical mailed notice of public hearing**
7. **On behalf of Human Resources**
    a. **ADA Concerns Form**

Appendix J: Glossary of Terms and Basic information

The following glossary of terms is designed to give a basic overview of common elements of access within the Americans with Disabilities Act, Title II, and California State law. For more specific information concerning the terms described below please review 28 CFR 35 and the California Government Code 12926.

Definition of Disability:
Under California State law, Government Code Section 12926, a person with a disability is: 1) A person having a physical or mental impairment that limits a major life activity. This limitation must be considered in the unmitigated status. This means that the determination of whether the limitation exists would be considered in terms of how the individual would function without the use of medication, personal devices or habits that have been formed to mitigate the disability. 2). or, A person who has a record of a disability, such as described in number one. 3). or, A person who is regarded as having a disability, such as described in number one.
Note: This is an abridged definition of disability under California State law. For further information, please see California Government Code 12926. The California definition of disability is being used, as it is more stringent than the definition found under the Americans with Disabilities Act of 1990 or the Americans with Disabilities Amendments Act of 2008.

Qualified Person with a Disability
A qualified person with a disability has a disability as described above and is qualified to receive the programs, services or activities of the entity in question.

Self-Evaluation
A comprehensive evaluation of all programs, services and activities to ensure that access for qualified persons with disabilities is in place. The Self-Evaluation must be vetted with interested stakeholders. The Self-Evaluation was due in 1993.

Transition Plan
A physical access evaluation of all sites from which programs, services and activities are provided. The Transition Plan contains four parts: 1. A list of physical barriers; 2. A statement of method to be utilized for mitigation of barriers; 3. A statement regarding the schedule of barrier mitigation; and 4. The designation of an official who is responsible for the administration of the Transition Plan. The Transition Plan was due in 1992. The Transition Plan must be vetted with interested stakeholders.

Note: The intent was to create access within facilities that were online in 1992 and that new construction or remodels would be accessible.

Program Access
A designated alternative manner in providing programs, services and activities in order to ensure that appropriate access is in place. For example, accessible meeting space may be secured on the ground floor of the building to hold meetings with people who have mobility impairments, who are not able to go to the second floor because of the absence of an elevator.

ADA Grievance Procedure
A grievance process that is published and capable of addressing issues that may arise from access policies that impact the delivery of programs, services and activities. The grievance procedure must be widely disseminated, offer a second level review, notify the grievant of the outcome, state the ADA Coordinator's name and contact information and offer assistance to a person with a disability who may not be able to complete the grievance document independently due to their disability.

Notice of ADA Compliance
Notice of ADA Compliance is a widely disseminated notice that provides information concerning the elements of ADA compliance that the entity has in place. It is recommended that the Notice of ADA compliance be accompanied by a dissemination plan.

ADA Coordinator
This position is required for state and local government entities that have 50 or more employees. Initially, the position was envisioned to coordinate the grievance process. The national trend is that this position is now used to coordinate a variety of matters relative to ADA implementation and administration. Caution must be exercised concerning an appropriate separation of duties. It is inappropriate to have the ADA Coordinator engaged in both providing reasonable accommodations through the interactive process and investigating issues concerning the accommodations that have been provided or denied.

Direct Threat
Direct threat is a significant risk of substantial harm that cannot be mitigated through policy modification or reasonable accommodation. The danger must be real and not speculative or remote.

Policy Modification Request and Fundamental Alteration
A qualified person with a disability may request that an entity modify its policies to create an appropriate level of access. A system must be in place for entertaining these requests and determining whether said request would result in a fundamental alteration of the programs, services and activities impacted. Should there be an inability to grant the initial request, other measures must be considered if available, to address the access issue in question. Should it be determined that the request results in the fundamental alteration, a senior official should expeditiously sign off on the determination.

Auxiliary Aids and Services
These are measures provided to ensure that appropriate access to programs and services and activities is in place upon request. Auxiliary aids and services include, but are not limited to, providing documents in an alternative format such as Braille, providing sign language interpreting services, note takers, real-time captioning services or assistive listening devices.

Video Remote Interpreting (VRI)
VRI is permitted in the 2010 Title II ADA regulations. It provides a system in which sign language interpreting can be conducted via video with the interpreter offsite. Caution needs to be exercised to ensure that the technical quality of the system is sufficient to appropriately transmit the information being communicated.

California Relay Service
The California Relay Service was created by ADA, Title IV. It is a free service to facilitate effective telephone communication between persons who are Deaf and Hard of Hearing and persons who are hearing. This is done via a relay operator who uses both a teletype device and a telephone. The California Relay service may be reached at 711.
Note: Some entities have chosen to include “California Relay Service 711” on business cards and letterheads to facilitate communication.

Reasonable Accommodation
Reasonable accommodation technically refers to the employment relationship. It is an adjustment that provides the employee or applicant an opportunity to participate in: the performance of essential functions of the job, the selection process or to receive benefits and privileges offered to other employees in the work situation. Reasonable accommodation solutions often vary widely. Accommodation requests must be handled through an "interactive process".

Interactive Process:
The interactive process is required in state law and federal case law, yet neither defines it clearly. Problems have occurred when disputes have arisen and the employer has not clearly documented the interactive process. For that reason, the following steps are recommended:
1. The employer becomes aware that there is a disability that impacts elements of the employment relationship.
2. The employer and employee/applicant meet to discuss the barrier in question and potential resolutions. In this stage needed data is gathered from medical providers, consultants or the Jobs Accommodation Network.
3. After giving primary consideration to what the employee/applicant is requesting, the employer makes a prompt decision regarding what effective accommodation will be provided. Or, if the accommodation in question would result in an undue hardship the employer is not obligated to provide said accommodation.
4. The employer promptly implements the reasonable accommodation.
5. The employer initiates follow-up discussions with the recipient of reasonable accommodation to ensure that the accommodation was, in fact, effective.

Note: The reasonable accommodation process is ongoing and may need to be revisited at any point in the employment relationship, as disabilities and technology may change.

Medical Inquiry
Medical inquiry is the acquisition of pertinent medical information to determine whether a bona fide legal disability exists and what limitations it may present that necessitates a reasonable accommodation. Medical inquiry should be limited in scope. Data related to genetic characteristics should not be solicited, obtained or retained. Medical information may not be lawfully stored in an employee's personnel file.

Undue Hardship
An undue hardship would be the provision of a reasonable accommodation that is extensive, disruptive, fundamentally alters the nature of the program or is unduly expensive. It is important to note that the expense issue is extremely difficult for a state or local government entity to use as a defense. In doing so, one would need to consider the total budget of the entity in question.

Service Animal
A service animal is a dog or miniature horse that has specifically been trained to perform tasks for a person with a disability that they are not able to perform for themselves due to their disability.
Note: This is a subject that generates the highest number of complaints received by the US Department of Justice.

Maintenance of Accessible Features Policy
This relates to the requirement set by 28 CFR 35.133 in which an entity must maintain accessible features. Policy and procedure in this area is designed to give staff guidance unifying, repairing or reporting issues within access elements on sites where programs, services and activities are conducted.

APPENDIX B: ACCESS COMPLIANCE SURVEY REPORT OF FACILITIES

The City of Madera

Appendix B: Facilities Access Compliance Survey Report

April 2024
SSA Project # 20029

NORTHERN CALIFORNIA
100 BUSH STREET, SUITE 1625, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.514.8771

Table of Contents

I. Cover & Table of Contents

i. Report Navigation and Abbreviations

II. Facilities List

III. Cost Summary

IV. Survey Data - Facilities

NAVIGATION & LEGEND

City of Madera — Access Compliance Survey Report — 13 — **1-1-1**

Facility: **City Hall** — Part: **Interior** — Floor: **First Floor**

Address: **205 W. 4th Street** — Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	9 Qty	10 Unit	11 Cost	12 Total
1 2 Foyer						

Protrusion Limits (3)

2259

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. (4, 5)

- *As-Built:* **AED sign: 7.0" at 76.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. (6)

(7)

PCODE **EG04**

ADAAG 91 **4.4.1**

(8) *ADA 2010* **307.2**

CBC 2007 **1133B.8.6.1**

CBC 2019 **11B-307.2**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

1.	**Item Number:**	Number corresponding to the number on the Barrier Location Map which identifie the general location of the identifie barriers.
2.	**Item Name:**	Describes the barrier location / item title (e.g.: parking lot, room name).
3.	**As-Built Description:**	Description of identifie barrier based on applicable accessibility codes.
4.	**As-Built:**	Existing conditions / dimensions.
5.	**Proposed Solution:**	Description of steps necessary to remove barrier and, if applicable, an interim or alternative solution.
6.	**Notes:**	Additional notes pertaining to barrier.
7.	**SSA Codes / Info:**	- PCODE: specifie the relevant SSA database code. Database code plus suffi - REF: data shown for reference only [scope of work related to or covered by other item] - NT: non-typical problem or solution.
8.	**Federal & State Codes:**	The Federal and State standards or guidelines for accessibility, including: ADAAG/ADA 2010, CBC 2007 (legacy) & 2019 (current), and PROWAG.
9.	**Qty:**	Number of units required.
10.	**Type:**	Unit of measurement used to compute conceptual cost estimate. LF=linear feet; SF=square feet; JOB=lump sum.
11.	**Cost:**	Estimated conceptual cost of specifi solution per one unit.
12.	**Total:**	Total estimated conceptual cost for removing identifie barrier (multiplied Qty by Cost).
13.	**ID No:**	Specifie Facility Number, Area Number: 1=Interior / 0=Exterior, and Part / Floor Number.

Report Format

ABBREVIATIONS

ABA	Architectural Barriers Act
ADA	Americans with Disabilities Act
ADAAG	ADA Accessibility Guidelines
ADACO	ADA-Coordinator
AED	Automated External Defibrillators
AFF	Above finished floor
BCS	Baby Changing Station
CA	State of California
CBC	California Building Code
CSAS	CA State Accessibility Standards
ANSI	American National Standards Institute
C.T.P.	Contact third party
cl	Center line
CMGR	City Manager
D.A.	Designated accessible
DCS	Diaper changing station
DF	Drinking fountain
Dir.	Director
E.F.	Equivalent facilitation
EHD	Electric Hand Drier
FC	Fire Chief
FD	Finance Director
FDC	Facilities Design & Construction
FTD	Feminine Tissue Dispenser
FHAAG	Fair Housing Act Accessibility Guidelines
Fig.	Figure
FM&O	Facilities, Maintenance & Operations
FND	Feminine napkin disposal
FTD	Feminine tissue dispenser
Gov.	Government
HQ	Headquarters
HWB	Hazardous waste bin
IBC	International Building Code
ICC	International Code Council
ISA	International Symbol of Accessibility
JOB	per one job (lump sum)
Lav	Lavatory
lbs	Pounds
LF	Linear foot
Lib	Library
MOD	Modernization project
MoM	Method of mitigation
MP	Master priority
MRR	Men's restroom
N.A.R.	No action required
NT	Non-typical
o.c.	On center
O/R	Official responsible
P.A.	Physical alteration
P.M.	Program modification
POM	Plant Operations & Maintenance
POT	Path of travel
PROW	Public Right-of-Way
PTD	Paper towel dispenser
PW	Public Works
Qty	Quantity
REF	Reference
RGB	Rear grab bar
SCD	Seat cover dispenser
SD	Soap dispenser
sec.	Second
SF	Square foot
SGB	Side grab bar
tbd	To be determined
TPD	Toilet paper dispenser
UFAS	Uniform Federal Accessibility Standards
WC	Water closet
WRR	Women's restroom
WT	Water treatment facility
WWT	Waste water treatment facility

FACILITIES LIST

Facility#:	Facility:	Address:
1	City Hall	205 W. 4th Street
2	Frank Bergon Senior Center	238 S. D Street
3	Corporation Yard	1030 S. Gateway Drive
5	Fire Station 56	317 N. Lake Street
7	Fire Station 57	200 S. Schnoor
8	McNally Park	825 South A Street
102	Old Train Depot	120 N. E Street
117C	Police Department	330 South C Street
121	Rotary Park	800 N. Gateway Drive
122	Madera Sunrise Rotary Sports Complex	1901 Clinton Avenue
126	John Wells Youth Center	701 E. 5th Street
126A	Centennial Park	701 E. 5th Street
133	Lions Town & Country Park	2300 Howard Road
135	Community Development Offices	428 E. Yosemite Avenue
139	Pan Am Park	703 E. Sherwood Way
15	Millview Gymnasium	1901 Clinton Street
15A	Senior Nutrition Kitchen	1901 Clinton Street
181	Transit Center	1951 Independence Drive
182	Fire Station 58	2558 Condor Drive
23	Madera Municipal Airport	4020 Aviation Drive
26	Centennial Park Swimming Pool	221 Flume Street
39	Wastewater Treatment Plant	13048 Road 21 1/2
48	Madera Municipal Golf Course	23200 Avenue 17
50	Intermodal Facility	123 North E Street
51	Parks Maintenance Office	40 W. Olive
56	Westside Community Center	1124 W. Yosemite Avenue
56A	Rotary Youth Hut	113 South Q. Street
58	Mexican-American Center	716 Columbia Ave
60	Pan-Am Community Center	703 E. Sherwood Way
P1	Community Garden	621 E. 4th Street
P10	Sunset Park	Sunset Avenue and Accornero Street
P11	Vernon McCullough Fresno River Trail	Along Fresno River
P2	Granada Linear Park	Granada Avenue, between Glade and Cleveland
P3	Knox Park	Corner of Knox & A Streets
P4	Laurel Trail	Laurel Street, North of Sunset Avenue

Facility#:	Facility:	Address:
P5	Maple Court	T-Instersection of Maple Court and Maple Street
P6	Olive Outlots	Olive Avenue & Grove Street
P7	Riverside Park	Riverside Drive, between N. D Street and Lake
P8	Riverview	North side of Riverview Drive, just west of Hwy 99
P9	Sharon Avenue Linear Park	Sharon Avenue, between Cleveland and Riverside

COST SUMMARY

Facility: 1 City Hall			**$563,475.00**
1-0-1	Exterior	On-site	$140,325.00
1-1-1	Interior	First Floor	$423,150.00
Facility: 2 Frank Bergon Senior Center			**$413,400.00**
2-0-1	Exterior	On-site	$96,525.00
2-1-1	Interior	First Floor	$316,875.00
Facility: 3 Corporation Yard			**$573,279.00**
3-0-1	Exterior	On-site	$255,459.00
3-1-1	Interior	First Floor	$317,820.00
Facility: 5 Fire Station 56			**$388,599.00**
5-0-1	Exterior	On-site	$9,552.00
5-1-1	Interior	First Floor	$379,047.00
Facility: 7 Fire Station 57			**$386,250.00**
7-0-1	Exterior	On-site	$11,910.00
7-1-1	Interior	First Floor	$374,340.00
Facility: 8 McNally Park			**$232,488.00**
8-0-1	Exterior	On-site	$213,558.00
8-1-1	Interior	First Floor	$18,930.00
Facility: 102 Old Train Depot			**$202,995.00**
102-0-1	Exterior	On-site	$109,545.00
102-1-1	Interior	First Floor	$93,450.00
Facility: 117C Police Department			**$381,270.00**
117C-0-1	Exterior	On-site	$35,145.00
117C-1-1	Interior	First Floor	$346,125.00
Facility: 121 Rotary Park			**$343,791.00**
121-0-1	Exterior	On-site	$216,687.00
121-1-1	Interior	First Floor	$127,104.00
Facility: 122 Madera Sunrise Rotary Sports Complex			**$683,310.00**
122-0-1	Exterior	On-site	$388,695.00
122-1-1	Interior	First Floor	$294,615.00
Facility: 126 John Wells Youth Center			**$214,587.00**
126-0-1	Exterior	On-site	$12,012.00
126-1-1	Interior	First Floor	$68,895.00
126-1-2	Interior	Second Floor	$3,780.00

126-1	Interior	All	$129,900.00
Facility: 126A Centennial Park			**$149,310.00**
126A-0-1	Exterior	On-site	$141,420.00
126A-1-1	Interior	First Floor	$7,890.00
Facility: 133 Lions Town & Country Park			**$2,612,916.00**
133-0-1	Exterior	On-site	$1,264,752.00
133-1-1	Interior	First Floor	$1,348,164.00
Facility: 135 Community Development Offices			**$78,468.00**
135-0-1	Exterior	On-site	$26,583.00
135-1-1	Interior	First Floor	$44,175.00
135-1-2	Interior	Second Floor	$7,710.00
Facility: 139 Pan Am Park			**$292,239.00**
139-0-1	Exterior	On-site	$73,239.00
139-1-1	Interior	First Floor	$219,000.00
Facility: 15 Millview Gymnasium			**$244,935.00**
15-1-1	Interior	First Floor	$244,935.00
Facility: 15A Millview Gymnasium			**$156,390.00**
15A-1-1	Interior	First Floor	$3,600.00
15A-0-1	Exterior	On-site	$71,010.00
15A-1-1	Interior	First Floor	$81,780.00
Facility: 181 Transit Center			**$65,370.00**
181-0-1	Exterior	On-site	$8,775.00
181-1-1	Interior	First Floor	$56,595.00
Facility: 182 Fire Station 58			**$539,055.00**
182-0-1	Exterior	On-site	$51,750.00
182-1-1	Interior	First Floor	$487,305.00
Facility: 23 Madera Municipal Airport			**$267,600.00**
23-0-1	Exterior	On-site	$120,135.00
23-1-1	Interior	First Floor	$147,465.00
Facility: 26 Centennial Park Swimming Pool			**$166,356.00**
26-0-1	Exterior	On-site	$24,021.00
26-1-1	Interior	First Floor	$142,335.00
Facility: 39 Wastewater Treatment Plant			**$272,049.00**
39-0-1	Exterior	On-site	$16,974.00

39-1-1	Interior	First Floor	$255,075.00
Facility: 48 Madera Municipal Golf Course			**$507,582.00**
48-0-1	Exterior	On-site	$82,272.00
48-1-1	Interior	First Floor	$425,310.00
Facility: 50 Intermodal Facility			**$155,511.00**
50-0-1	Exterior	On-site	$39,606.00
50-1-1	Interior	First Floor	$115,905.00
Facility: 51 Parks Maintenance Office			**$219,825.00**
51-0-1	Exterior	On-site	$5,325.00
51-1-1	Interior	First Floor	$214,500.00
Facility: 56 Westside Community Center			**$12,000.00**
56-0-1	Exterior	On-site	$12,000.00
Facility: 56A Rotary Youth Hut			**$351,585.00**
56A-0-1	Exterior	On-site	$18,900.00
56A-1-1	Interior	First Floor	$332,685.00
Facility: 58 Mexican-American Center			**$330,342.00**
58-0-1	Exterior	On-site	$74,892.00
58-1-1	Interior	First Floor	$255,450.00
Facility: 60 Pan-Am Community Center			**$342,951.00**
60-0-1	Exterior	On-site	$43,131.00
60-1-1	Interior	First Floor	$299,820.00
Facility: P1 Community Garden			**$58,566.00**
P1-0-1	Exterior	On-site	$58,566.00
Facility: P10 Sunset Park			**$229,800.00**
P10-0-1	Exterior	On-site	$229,800.00
Facility: P11 Vernon McCullough Fresno River Trail			**$2,038,977.00**
P11-0-1	Exterior	On-site	$2,038,977.00
Facility: P2 Granada Linear Park			**$28,515.00**
P2-0-1	Exterior	On-site	$28,515.00
Facility: P3 Knox Park			**$13,824.00**
P3-0-1	Exterior	On-site	$13,824.00
Facility: P4 Laurel Trail			**$79,200.00**
P4-0-1	Exterior	On-site	$79,200.00

Facility: P5 Maple Court			**$15,000.00**
P5-0-1	**Exterior**	**On-site**	**$15,000.00**
Facility: P6 Olive Outlots			**$5,700.00**
P6-0-1	**Exterior**	**On-site**	**$5,700.00**
Facility: P7 Riverside Park			**$621,636.00**
P7-0-1	**Exterior**	**On-site**	**$621,636.00**
Facility: P8 Riverview			**$24,000.00**
P8-0-1	**Exterior**	**On-site**	**$24,000.00**
Facility: P9 Sharon Avenue Linear Park			**$336,108.00**
P9-0-1	**Exterior**	**On-site**	**$336,108.00**
Grand Total for **City of Madera**			**$14,599,254.00**

SURVEY DATA

Access Compliance Survey Report

City Hall

205 W. 4th Street

Facility #: 1

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 NW Entrance

Cross Section

81

- *As-Built Description:*

Standard handrail: Gripping section narrower than 1-1/4" or wider than 2".

- *As-Built:* **6.5" handrail perimeter**
- *Proposed Solution:*

Provide new handrail.

PCODE **ED03**
ADAAG 91 **4.26.2**
ADA 2010 **505.7**
CBC 2007 **1133B.4.2.6**
CBC 2019 **11B-505.7**

Mitigated:
○ YES
◉ NO

30 LF $225 **$6,750**

○ Staff Only

Priority 1
Severity 2

Curb or Barrier

82

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *As-Built:* **5.5" sphere**
- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Curb Ramp					
86	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **1.0" high** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		○ Staff Only				
		Priority **1** ***Severity*** **2**				
87	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **9.0%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
88	• *As-Built Description:* Side slopes more than 1:10 (10%). • *As-Built:* **19.0%** • *Proposed Solution:* Modify curb ramp. Demolish side slopes and replace with 1:10 side slopes if 48" level top landing is provided.	*PCODE* **EH05A** *ADAAG 91* **4.7.5** *ADA 2010* **406.3** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$6,000	**$12,000**
85	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 3

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

83

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

30 LF $285 **$8,550**

○ Staff Only

Priority 1
Severity 2

Signage

78

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

- ***Notes:***

PCODE **SA01**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1117B.5.8.1.2**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

1 JOB $690 **$690**

○ Staff Only

Priority 1
Severity 3

Unless this entrance is modified to be accessible consider a directional sign informing drivers where they can park to access this building.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Slope					
79	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **9.1%** • *Proposed Solution:* Modify surface.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	10	SF	$300	**$3,000**
84	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **Landing slopes 8.4%** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%. Relocate the curb ramp. • ***Notes:***	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	50	SF	$300	**$15,000**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 2

The landing is also a curb ramp or the landing is in the parking lot (depending how one calls it).

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
80	**Top and Bottom Extension at** • *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	2	JOB	$510	**$1,020**

○ Staff Only

Priority 1

Severity 1

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 NW Entrance Stairs

Stairways

89

- *As-Built Description:*

Exterior stair substantially out of compliance.

- *Proposed Solution:*

Provide complete new stair, 4 ft. wide with landing and handrails.

PCODE **EC09**
ADAAG 91 **4.9**
ADA 2010 **504**
CBC 2007 **1133B.4**
CBC 2019 **11B-504**

Mitigated:

○ YES
◉ NO

40 IN $270 **$10,800**

⊗ Staff Only

Priority 1

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 NW Entrance Accessible Parking

Floor or Ground Surfaces

90

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 19.0%**
- *Proposed Solution:*

Modify slope at accessible parking space.

- ***Notes:***

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

SF $36

○ Staff Only

Priority 1
Severity 1

The steepest slopes are caused by the gutter slope. Other slopes are due to upheavals in the pavement and general surface slopes.

Parking

92

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **8.0' wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
91	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**
93	• *As-Built Description:* Parking sign is not located between 60" and 80" above the finish floor or ground surface measured to the bottom of the sign. • *As-Built:* **58.0" high** • *Proposed Solution:* Remount existing sign at accessible height.	*PCODE* **EA04H** *ADAAG 91* **4.6.4** *ADA 2010* **502.7** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$135	**$135**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
94	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *As-Built:* **Incomplete. Does not comply w current verbiage.** • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 West 4th Entrance and Parking

Changes in Level

102

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

30 SF $63 **$1,890**

○ Staff Only

Priority 1
Severity 4

Clear Floor Space

113

- *As-Built Description:*

EV charger station does not have 30" x 48" clear floor space.

- *Proposed Solution:*

Provide 30" x 48" clear floor space in front of charger station.

- ***Notes:***

PCODE **EV14**
CBC 2019 **11B-707.2**

Mitigated:
○ YES
◉ NO

REF $0

○ Staff Only

Priority 1
Severity 1

The clear floor space slopes 10.0% at the gutter.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

112

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 2

110

- *As-Built Description:*

Cross slope greater than 2%.

- *As-Built:* **3.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

PCODE **EH02F**
ADAAG 91 **4.8.6**
ADA 2010 **405.3**
CBC 2007 **1133B.5.3.1**
CBC 2019 **11B-406.5.7**

Mitigated:

○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

117

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

- ***Notes:***

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

30 LF $81 **$2,430**

○ Staff Only

Priority 1
Severity 3

Check facility jurisdiction.

Door

95

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

5 SF $120 **$600**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	EV Parking					
114	• *As-Built Description:* Electric Vehicle is not located on an accessible route. • *Proposed Solution:* Modify or relocate Electric Vehicle space so that it connects to the accessible route. • ***Notes:***	*PCODE* **EV03** *CBC 2019* **11B-812.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,050	**$1,050**
	No striping, signage or accessible route at EV chargers.					
	Floor or Ground Space					
115	• *As-Built Description:* Electric Vehicle space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 8.0%. 11.0% at gutter.** • *Proposed Solution:* Modify slope at Electric Vehicle space to provide a slope of 2% maximum. • ***Notes:***	*PCODE* **EV01** *CBC 2019* **11B-812.3** **Mitigated:** ○ YES ◉ NO	360	SF	$36	**$12,960**
	EV parking spaces slope >2.0%					

○ Staff Only

Priority 1

Severity 1

○ Staff Only

Priority 1

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
109	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **3.0% to 11.0% at gutter.** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	150	SF	$36	**$5,400**
111	• *As-Built Description:* Access aisle at accessible parking space has slope greater than 1/4":12" (2%). • *Proposed Solution:* Demolish existing and provide new curb ramp outside of the access aisle. • ***Notes:*** **Parking access aisle obstructed by curb ramp.**	*PCODE* **EA05BNT** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 1

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

100

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

8 LF $285 **$2,280**

○ Staff Only

Priority 1
Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Parking

105

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **34.0" to 148.0", defined by the section of access aisle which is adjacent to the parking spaces.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
106	• *As-Built Description:* Accessible parking space does not have 5' wide access aisle; 8' wide for van accessible aisle. • *Proposed Solution:* Modify parking aisle(s) to create accessible space by restriping. • ***Notes:*** **Access aisle does not extend the length of the spaces.**	*PCODE* **EA02B** *ADAAG 91* **4.6.3** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2; 11B-502.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**
108	• *As-Built Description:* CA only: The area within the blue borderlines not marked with hatched lines a maximum of 36" on center. • *Proposed Solution:* Restripe to provide hatched lines at 36" on center within access aisle. • ***Notes:*** **Not diagonal.**	*PCODE* **EA04I** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
107	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 3

Parking Signage

116	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area. • ***Notes:***	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Verbiage. Size.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
97	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	8	JOB	$300	**$2,400**

○ Staff Only

Priority 1

Severity 2

	Ramp					
104	• *As-Built Description:* Slope not steep but greater than 1:20 (5.0 %) without handrails. • *Proposed Solution:* Provide handrails for ramp. • ***Notes:***	*PCODE* **EB03** *ADAAG 91* **4.8.1** *ADA 2010* **405.1** *CBC 2007* **1133B.5.5.1** *CBC 2019* **11B-405.8** **Mitigated:** ○ YES ◉ NO	60	LF	$225	**$13,500**

○ Staff Only

Priority 1

Severity 3

Multiple barriers on existing handrail. No handrail on one side.

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

103

- *As-Built Description:*

Sign to provide direction to or information about building functional spaces missing or non-compliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA09NT**
ADAAG 91 **4.1.3(16)(b)**
ADA 2010 **216.3**
CBC 2007 **1117B.5.8.1.3**
CBC 2019 **11B-216.3**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 1
Severity 4

The information is incorrect. The path to the left requires some grinding to be accessible. (6.0% slopes for a approximately 3'). 7.6% slopes were measured to the right. Furthermore the sign is confusing. It appears to point out to the sidewalk.

98

- *As-Built Description:*

Accessible building entrance when not all are accessible not identified with a sign showing the International Symbol of Accessibility.

- *Proposed Solution:*

Provide building entrance sign that shows international symbol at accessible entrance.

- ***Notes:***

PCODE **SA12**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1127B.3**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 3

Accessible entrances not marked with an ISA.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

99

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosings.

- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

6 JOB $510 **$3,060**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

101

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

200 LF $27 **$5,400**

○ Staff Only

Priority 1
Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1.,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Walk

96

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **Up to 6.0%. Cross slope up to 2.4%.**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

20 SF $75 **$1,500**

○ Staff Only

Priority 1
Severity 4

Conceptual Costs for **Floor:** On-site **$140,325.00**

Facility: **City Hall** Part: **Exterior** Floor: **On-site**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$140,325.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Assistive Listening

16

- *As-Built Description:*

No signs at the building or assembly area entrance to notify patrons that an assistive listening system is available.

- *Proposed Solution:*

Provide assistive listening signage.

PCODE **GI02**
ADAAG 91 **4.1.3(19)(b)**
ADA 2010 **703.7.2.4**
CBC 2007 **1104B.2.4**
CBC 2019 **11B-703.7.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 3

Carpet/Doormat

19

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

68

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **46.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

10 JOB $7,500 **$75,000**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Door Closer

20

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.0 second**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

60

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:

○ YES
◉ NO

10 JOB $450 **$4,500**

⊗ Staff Only

Priority 2

Severity 3

Door Stopper

15

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:

○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

63

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

10 JOB $150 **$1,500**

○ Staff Only

Priority 2
Severity 2

Electrical

17

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

30 JOB $900 **$27,000**

⊗ Staff Only

Priority 4
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

9

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:

○ YES

◉ NO

1

○ Staff Only

Priority 4

Severity 3

According to staff there is no fire alarm system in the building.

Non-Fixed Desk

65

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

- ***Notes:***

PCODE **IN02A**

ADAAG 91 **4.32.3 & .4**

ADA 2010 **306.1**

CBC 2007 **1122B.3 & 4**

CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:

○ YES

◉ NO

20 JOB $1,500 **$30,000**

⊗ Staff Only

Priority 2

Severity 2

Occurs throughout employee areas where conferences and writing occur.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
18	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **AED: 7.2" at 41.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	3	JOB	$300	**$900**
		⊗ Staff Only				
		Priority **2** ***Severity*** **3**				
	Signage					
50	• *As-Built Description:* At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT" sign at door.	*PCODE* **SA10A** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	10	JOB	$270	**$2,700**
		○ Staff Only				
		Priority **2** ***Severity*** **3**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
51	• *As-Built Description:* At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT ROUTE" sign at door.	*PCODE* **SA10D** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	10	JOB	$270	**$2,700**

○ Staff Only

Priority 2

Severity 3

59	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	30	JOB	$450	**$13,500**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Council Chambers

Disabled Seating

6

- *As-Built Description:*

Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat).

- *Proposed Solution:*

Remove fixed seating and provide wheelchair space plus necessary maneuvering clearance.

- ***Notes:***

PCODE **GB01A**
ADAAG 91 **4.1.3(19)(a)**
ADA 2010 **221.2**
CBC 2007 **1104B.3.6**
CBC 2019 **11B-221.2**

Mitigated:
○ YES
◉ NO

2 JOB $1,350 **$2,700**

○ Staff Only

Priority 2
Severity 3

Side approach wheelchair spaces are 54.0” x 36.0” and obstruct the circulation path. The back of the wheelchair space is Not in alignment with the companion seat.

Door Hardware

14

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

2 JOB $450 **$900**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

12

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **34.0" to opposite wall**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 2
Severity 2

13

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

- ***Notes:***

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 2
Severity 3

No accessible means of egress from council seating.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Electrical					
10	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **54.25" high** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height.	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

⊗ Staff Only

Priority 2

Severity 3

	Fixed Seating					
5	• *As-Built Description:* Less than five percent of the total number of aisle seats are accessible. • *Proposed Solution:* Provide aisle seats with no or removable armrest. • ***Notes:***	*PCODE* **GE01A** *ADAAG 91* **4.1.2(19)a** *ADA 2010* **221.4** *CBC 2007* **1104B.3.4** *CBC 2019* **11B-221.4** **Mitigated:** ○ YES ◉ NO	1	EA	$15,000	**$15,000**

○ Staff Only

Priority 2

Severity 3

No ISA and no removable armrest at designated aisle seat.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
4	• *As-Built Description:* CA only: Less than one percent of total seats have at least 24" clear leg space between the front of the seat and any obstruction to accommodate semi-ambulant individuals. • *As-Built:* **12.0" leg space at semi ambulant seats. 46 seats in auditorium.** • *Proposed Solution:* Relocate seats to provide 24" clear leg room for semi-ambulant individuals.	*PCODE* **GE01D** *CBC 2007* **1104B.3.8** *CBC 2019* **11B-221.6** **Mitigated:** ○ YES ◉ NO	1	EA	$15,000	**$15,000**

○ Staff Only

Priority 2

Severity 2

Reach Range

11	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **57.0" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 2

Severity 4

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

8

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *As-Built:* **4.0" extension**
- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

4 JOB $510 **$2,040**

○ Staff Only

Priority 2

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Foyer

Brochure Bins

23

- *As-Built Description:*

Information brochure bins mounted above accessible height of 48".

- *As-Built:* **71.0" high**
- *Proposed Solution:*

Relocate/remount bins at accessible height.

PCODE **IN08**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

Drinking Fountain

24

- *As-Built Description:*

Drinking fountain bubbler for standing person shall be 38" minimum and 43" maximum above floor.

- *As-Built:* **43.4" to high spout outlet.**
- *Proposed Solution:*

Relocate existing drinking fountain.

PCODE **IA03BNT**
ADAAG 91 **4.15.2**
ADA 2010 **602.4**
CBC 2007 **1115B.4.6.4**
CBC 2019 **11B-602.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

21

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **17.0" deep**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

25

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED sign: 7.0" at 76.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

22

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **42.5" high**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 3

Signage

26

- *As-Built Description:*

Sign to provide direction to or information about building functional spaces missing or non-compliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

No directional sign at inaccessible restrooms.

PCODE **SA09**
ADAAG 91 **4.1.3(16)(b)**
ADA 2010 **216.3**
CBC 2007 **1117B.5.8.1.3**
CBC 2019 **11B-216.3**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 1
Severity 4

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
27	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **61.0" high at inaccessible men's public restroom** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Unisex Restroom Public

Accessories

33

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **42.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

34

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
35	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **49.0" high** • *Proposed Solution:* Relocate existing restroom accessories.	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 2

31	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
38	• *As-Built Description:* Bottom of flat, not tilted mirror not located above lavatories or countertops mounted with bottom edge more than 35" above floor or top edge less than 74" above floor. • *As-Built:* **40.75" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03B** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 3

Grab Bars

32	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 21.0" on wide side** • *Proposed Solution:* Provide or relocate accessible rear grab bar. • ***Notes:***	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
36	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 1.6" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
37	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 2.7" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

40

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.8" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Signage

29

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *As-Built:* **1/16" between raised characters.**
- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

- ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

This geometric sign is also the raised character and braille sign at this restroom. However the raised character sign should be installed on the latch side of the door if there's room.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
28	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled or radiused.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Water Closet

30	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **18.6" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
39	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Lobby

Brochure Bins

47

- *As-Built Description:*

Information brochure bins mounted above accessible height of 48".

- *As-Built:* **60.0" to 80.0" high**
- *Proposed Solution:*

Relocate/remount bins at accessible height.

PCODE **IN08**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

Disabled Seating

41

- *As-Built Description:*

Wheelchair space (33"x 48") not provided at non-fixed seating with front or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat).

- *Proposed Solution:*

Provide storage for non-fixed seating and remove.

PCODE **GB01B**
ADAAG 91 **4.32**
ADA 2010 **221.2**
CBC 2007 **1104B.3.6**
CBC 2019 **11B-221.2**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

43

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Shelf/writing surface: 14.5” at 41.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

46

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Stanchions 37.0”**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

4 LF $300 **$1,200**

○ Staff Only

Priority 1
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

42

- *As-Built Description:*

Sales and service counter: Accessible section not provided (knee space min. 27" high x 19" deep x 30" wide)

- *As-Built:* **14.5" deep**
- *Proposed Solution:*

Retrofit existing counter to provide accessible seating section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03A**
ADAAG 91 **4.32.3 & 4**
ADA 2010 **306.3; 904.4**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.3; 11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 2

44

- *As-Built Description:*

Sales and service counter: Accessible section not provided (knee space min. 27" high x 19" deep x 30" wide)

- *As-Built:* **16.0" deep**
- *Proposed Solution:*

Retrofit existing counter to provide accessible seating section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03A**
ADAAG 91 **4.32.3 & 4**
ADA 2010 **306.3; 904.4**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.3; 11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

45

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **49.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Service Counters

48

- *As-Built Description:*

Where counters or teller windows have security glazing to separate personnel
from the public, a method to facilitate voice communication shall be provided.

- *Proposed Solution:*

Facilitate voice communication at security glazing.

- ***Notes:***

PCODE **904.6**
ADA 2010 **904.6**
CBC 2019 **11B-904.6**

Mitigated:
○ YES
◉ NO

1 REF $4,500 **$4,500**

○ Staff Only

Priority 1
Severity 2

No amplification at window. Difficult to hear attendant.

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

49

- *As-Built Description:*

Sign to provide direction to or information about building functional spaces missing or non-compliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA09**
ADAAG 91 **4.1.3(16)(b)**
ADA 2010 **216.3**
CBC 2007 **1117B.5.8.1.3**
CBC 2019 **11B-216.3**

Mitigated:

○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 1

Severity 4

Purpose of Signage not clear. Add visual text.

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Conference Room

Door Swing

52

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **8.4" deep alcove.**
- *Proposed Solution:*

Remove door trim.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Lobby

Public Counter

53

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **42.25" high**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Breakroom

Door Hardware

58

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

⊗ Staff Only

Priority 2
Severity 3

Non-Fixed Desk

55

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **28.0" wide at pedestal base**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

- ***Notes:***

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 2
Severity 2

8 seats and 0 accessible.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

57

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Sink

54

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **34.2" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 2
Severity 4

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Vending Machine

56

- *As-Built Description:*

Vending machine coin slot or dispensing outlet, more than 48" above the floor.

- *As-Built:* **11.5” to bottom of the dispenser tray and 60.5” to top buttons**
- *Proposed Solution:*

Advise vendor/leasing company to provide accessible vending machine with highest operable part at 48" max.

PCODE **IL02**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **1126B**
CBC 2019 **11B-308.2.1**

Mitigated:

○ YES
◉ NO

1 REF

⊗ Staff Only

Priority **2**

Severity **3**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Portable Office

Corridor

62

- *As-Built Description:*

Corridor less than 44" wide.

- *As-Built:* **31.0" wide**
- *Proposed Solution:*

Relocate furniture.

PCODE **IH03**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 LF $420 **$420**

⊗ Staff Only

Priority 4
Severity 4

Door Clearance

61

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **78.6" long x 28.5" wide**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Exit Door

General Note

64

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 4

Severity 2

Exit door swings in.

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Conference Room

Door Swing

66

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority **2**

Severity **2**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Breakroom

Brochure Bins

69

- *As-Built Description:*

Information brochure bins mounted above accessible height of 48".

- *As-Built:* **66.0" high**
- *Proposed Solution:*

Relocate/remount bins at accessible height.

PCODE **IN08**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 1

Non-Fixed Desk

67

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **14.0" deep. 4 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

⊗ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Breakroom

Corridor

74

- *As-Built Description:*

Corridor less than 44" wide.

- *As-Built:* **41.5”**
- *Proposed Solution:*

Relocate drinking fountains.

- ***Notes:***

PCODE **IH03**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

4 LF $1,200 **$4,800**

⊗ Staff Only

Priority 2
Severity 4

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Drinking Fountain

73

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain).

- *As-Built:* **26.75” knee high**
- *Proposed Solution:*

Provide new, accessible fountain.

PCODE **IA02**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $9,600 **$9,600**

⊗ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
72	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 2

Severity 3

Reach Range

71	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **59.0" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 2

Severity 4

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Sink						
70	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **34.25" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Men's and Women's Employee Restrooms

Restroom

75

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Mens).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

1 JOB ? **$105,000**

⊗ Staff Only

Priority 3
Severity 1

Consider whether the these restrooms qualify for the exception 213.2.

Signage

76

- *As-Built Description:*

Sign to provide direction to or information about building functional spaces missing or non-compliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA09**
ADAAG 91 **4.1.3(16)(b)**
ADA 2010 **216.3**
CBC 2007 **1117B.5.8.1.3**
CBC 2019 **11B-216.3**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

⊗ Staff Only

Priority 3
Severity 4

No directional sign at inaccessible toilet rooms.

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

14 Hallway

Door Swing

77

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **4.0" to wall**
- *Proposed Solution:*

Provide power door operator.

- ***Notes:***

PCODE **ID23C**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $15,000 **$15,000**

○ Staff Only

Priority **2**

Severity **2**

Consider instead a directional sign unless this is a required exit.

Conceptual Costs for **Floor:** First Floor **$423,150.00**

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$423,150.00**

Facility: **City Hall** Part: **Interior** Floor: **First Floor**

Address: **205 W. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** City Hall					**$563,475.00**

Access Compliance Survey Report

Frank Bergon Senior Center

238 S. D Street

Facility #: 2

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 Parking and Routes General

Detectable Warning

382

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

- ***Notes:***

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

36 LF $81 **$2,916**

○ Staff Only

Priority 1
Severity 3

Check jurisdictions.

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Routes West

Changes in Level

359

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.7" not beveled**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

3 SF $63 **$189**

○ Staff Only

Priority 1
Severity 4

Cross Slope

364

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

160 SF $75 **$12,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
365	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 3.5%** • *Proposed Solution:* Modify cross slope. • ***Notes:***	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	32	SF	$75	**$2,400**

○ Staff Only

Priority 1

Severity 4

The cross slope extends into the door maneuvering clearance.

367	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **3.5%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	20	SF	$75	**$1,500**

○ Staff Only

Priority 1

Severity 4

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
368	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.3%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	12	SF	$75	**$900**
373	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *Proposed Solution:* Modify cross slope. • ***Notes:*** **Clear floor space slopes 4.0%.**	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	5	SF	$75	**$375**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
371	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *Proposed Solution:* Relocate existing plaque. • ***Notes:*** **Clear floor space at flag pole obstructed.**	*PCODE* **EF07NT** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	25	SF	$75	**$1,875**

○ Staff Only

Priority 1

Severity 4

Curb Ramp

380	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **11.0%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02A** *ADAAG 91* **4.7.2** *ADA 2010* **406.1** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 3

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
358	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Door

366	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **4.0%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	30	SF	$120	**$3,600**

○ Staff Only

Priority 1

Severity 3

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
362	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 9.0%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	150	SF	$36	**$5,400**
	Parking					
361	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **110.0”** • *Proposed Solution:* Modify parking space(s) to create accessible space.	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$600	**$1,200**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 2

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
363	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**
357	• *As-Built Description:* Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Provide wheel stops to prevent encroachment.	*PCODE* **EA04L** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	11	JOB	$225	**$2,475**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

374

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

Reach Range

370

- *As-Built Description:*

Reach height to control or access point, exceeds 48" or is less than 15".

- *As-Built:* **69.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE01**

ADAAG 91 **4.2.5**

ADA 2010 **308.2.1**

CBC 2007 **1118B.5**

CBC 2019 **11B-308.2.1**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 1

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
360	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **13.0%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	3	SF	$75	**$225**
						○ Staff Only
						Priority 1
						Severity 3
372	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **8.8%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	50	SF	$75	**$3,750**
						○ Staff Only
						Priority 1
						Severity 4

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
356	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **47.0" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	100	SF	$135	**$13,500**
369	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **35" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	50	SF	$135	**$6,750**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Parking and Routes East

Cross Slope

379

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 32.0%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1
Severity 1

QC Verify whether this route comes from a private road. Check scope.

Curb Ramp

378

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **15.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 2

Multiple compliance issues.

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
375	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Parking

376	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **123.0"** • *Proposed Solution:* Modify parking space(s) to create accessible space.	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$600	**$1,200**

○ Staff Only

Priority 1

Severity 2

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
377	• *As-Built Description:* Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Provide wheel stops to prevent encroachment.	*PCODE* **EA04L** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	8	JOB	$225	**$1,800**

○ Staff Only

Priority 1

Severity 4

Parking Signage

381	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** On-site **$96,525.00**

Facility: **Frank Bergon Senior Center** Part: **Exterior** Floor: **On-site**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$96,525.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Alarm Signal

337

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

- ***Notes:***

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 4
Severity 3

See exception.

Carpet/Doormat

331

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

8 JOB $225 **$1,800**

○ Staff Only

Priority 2
Severity 3

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

321

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.5 seconds**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:

○ YES
◉ NO

5 JOB $75 **$375**

○ Staff Only

Priority 2

Severity 2

Door Stopper

322

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:

○ YES
◉ NO

15 JOB $75 **$1,125**

○ Staff Only

Priority 2

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Threshold					
330	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.75”** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	4	JOB	$1,200	**$4,800**
		 ○ Staff Only ***Priority*** **2** ***Severity*** **4**				
	Electrical					
335	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **12.0” high** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height. • ***Notes:***	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$900	**$3,600**
		 ○ Staff Only ***Priority*** **4** ***Severity*** **3**				

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
336	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **49.25" to top of box.** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height. • ***Notes:***	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Operable Part

323	• *As-Built Description:* Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand. • *Proposed Solution:* Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand. • ***Notes:***	*PCODE* **IC02** *ADAAG 91* **4.27.4** *ADA 2010* **309.4** *CBC 2007* **1117B.6.4** *CBC 2019* **11B-309.4** **Mitigated:** ○ YES ◉ NO	2	JOB	$900	**$1,800**

○ Staff Only

Priority 4

Severity 3

59.0" to handle. Requires grasping if removed below 48.0"

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

328

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

6 JOB $270 **$1,620**

○ Staff Only

Priority 2
Severity 3

329

- *As-Built Description:*

At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT ROUTE" sign at door.

PCODE **SA10D**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

3 JOB $270 **$810**

○ Staff Only

Priority 2
Severity 3

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
327	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	12	JOB	$450	**$5,400**

○ Staff Only

Priority 2

Severity 4

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Women's Restroom

Restroom

317

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **166.0" x 146.5"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

High lavatory, narrow accessible compartment, 40.0" path to toilet compartment, mirrors, high accessories, protruding accessories, grab bars, door maneuvering clearance, nearly every element is out of compliance.

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Men's Restroom

Restroom

318

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **166.0" x 146.5"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

High lavatory, narrow accessible compartment, narrow path to compartment, high urinal, mirrors, high accessories, protruding accessories, grab bars, door maneuvering clearance- nearly every element is out of compliance.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Main Room

Cafeteria Line

347

- *As-Built Description:*

Counters, shelves, equipment are not accessible to disabled persons (required: tray slides 34" high maximum; at least 50% of shelves less than 48" high).

- *Proposed Solution:*

Provide new counter and shelves.

- ***Notes:***

PCODE **FB02**
ADAAG 91 **5.5**
ADA 2010 **227.4**
CBC 2007 **1104B.5.5**
CBC 2019 **11B-227.4**

Mitigated:
○ YES
◉ NO

20 LF $1,200 **$24,000**

○ Staff Only

Priority 2
Severity 4

36.0” high tray slide.

Door Swing

320

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

319

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **48 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

3 JOB $1,500 **$4,500**

○ Staff Only

Priority 2
Severity 2

Protrusion Limits

348

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Tray slide: 5.5" at 34.4" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 SE Entrance

Door

325

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

30 SF $120 **$3,600**

○ Staff Only

Priority 1
Severity 4

Door Threshold

324

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **0.75”**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

5 JOB $1,200 **$6,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 NW Corridor Entrance

Door

326

- *As-Built Description:*

Lower push plate located at 7" minimum and 8" maximum above the floor or ground surface not provided.

- *Proposed Solution:*

Relocate lower push plate.

- ***Notes:***

PCODE **ID13B**

CBC 2007 **1133B.2.3.2**

CBC 2019 **11B-404.2.9 2. C**

Mitigated:

○ YES

◉ NO

1 JOB $750 **$750**

○ Staff Only

Priority 1

Severity 2

Bottom push late 11.0” to center.

Door Threshold

332

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.2”**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**

ADAAG 91 **4.13.8**

ADA 2010 **404.2.5**

CBC 2007 **1133B.2.4.1**

CBC 2019 **11B-404.2.5**

Mitigated:

○ YES

◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1

Severity 4

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
333	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **42.0" at push plate. 44.0" to wall.** • *Proposed Solution:* Enlarge width of walk to 48". • ***Notes:***	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	5	SF	$135	**$675**

○ Staff Only

Priority 1

Severity 4

Install directional signage.

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 D Street Entrance

Signage

334

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

- ***Notes:***

PCODE **SA01**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1117B.5.8.1.2**
CBC 2019 **11B-216.6**

Mitigated:

○ YES
◉ NO

3 JOB $690 **$2,070**

○ Staff Only

Priority 1

Severity 3

The door maneuvering clearance slopes 9.9%. The ramp leading to the door slopes 9.9% and there does not appear to be room for a compliant ramp with handrails. Install directional signage on the interior of the door as well as the exterior.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Corridor

Corridor

343

- *As-Built Description:*

Corridor, for occupant load less than 10, less than 36" wide.

- *Proposed Solution:*

Remove or relocate furniture and storage items.

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 4

Door Swing

342

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 3

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
346	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **30.0"** • *Proposed Solution:* Remove or relocate drinking fountain.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 1

Severity 2

Drinking Fountain

345	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

340

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Service counter: 5.5” to 6.5” at 34.5” high**
- *Proposed Solution:*

Provide cane detectable side panels.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 3

341

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED sign: 7.0” at 75.5” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
344	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **FE: 5.2" at 52" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

Public Counter

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
339	• *As-Built Description:* Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided. • *As-Built:* **37.7" high** • *Proposed Solution:* Retrofit existing counter to provide accessible section. Interim solution: Provide auxiliary counter, table, or clipboard.	*PCODE* **IN03** *ADAAG 91* **7.2(2)** *ADA 2010* **904.4** *CBC 2007* **1122B.4** *CBC 2019* **11B-904.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 4

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Technology Lab

Desk

338

- *As-Built Description:*

Accessible fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *Proposed Solution:*

Provide new fixed accessible table or desk.

PCODE **IN02**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1 & 902.3**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:

○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Kitchen

Door Swing

349

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **6.0”**
- *Proposed Solution:*

Change door swing.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 4
Severity 3

355

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Change door swing.

- ***Notes:***

PCODE **ID24**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 3

Install directional signage unless this is a required exit.

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

354

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.1”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 4
Severity 4

Reach Range

352

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **63.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
353	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **Obstructed reach to items by 37.0" countertop.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

Sink

351	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **37.0" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 4

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
350	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 2

Conceptual Costs for **Floor:** First Floor **$316,875.00**

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$316,875.00**

Facility: **Frank Bergon Senior Center** Part: **Interior** Floor: **First Floor**

Address: **238 S. D Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Frank Bergon Senior Center					**$413,400.00**

Access Compliance Survey Report

Corporation Yard

1030 S. Gateway Drive

Facility #: 3

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Accessible Parking and Route to Lobby

Changes in Level

584

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

30 SF $63 **$1,890**

○ Staff Only

Priority 1
Severity 4

Cross Slope

577

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.5%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

240 SF $75 **$18,000**

○ Staff Only

Priority 1
Severity 4

The slopes go all the way from the entrance gate at the accessible parking.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

586

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

2 LF $81 **$162**

○ Staff Only

Priority 1
Severity 3

Door

578

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
579	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **9.5%** • *Proposed Solution:* Modify surface slope at door. • ***Notes:***	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	.5	SF	$120	**$60**

○ Staff Only

Priority 1

Severity 2

Check whether the DMC is not required because 1) this appears to be a controlled door and 2) the opening is 45.0" wide. (Doorways w/o doors appear to only apply to doors <36.0". If personnel hold the door open this may effectively be a doorway w/o door. Possibly equivalent facilitation.)The slope starts at 36.0" from the gate. The 9.5% slope is at the curb ramp flare. There is a 3.0% cross slope here which is contiguous with the 3.0% cross slopes leading to the public lobby.

Floor or Ground Surfaces

580	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **4.3%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	100	SF	$36	**$3,600**

○ Staff Only

Priority 1

Severity 3

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
583	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **5.8%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	10	SF	$36	**$360**

○ Staff Only

Priority 1

Severity 3

Parking

581	• *As-Built Description:* Accessible parking space does not have 5' wide access aisle; 8' wide for van accessible aisle. • *As-Built:* **95.5" wide** • *Proposed Solution:* Modify parking aisle(s) to create accessible space by restriping.	*PCODE* **EA02B** *ADAAG 91* **4.6.3** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2; 11B-502.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**

○ Staff Only

Priority 1

Severity 2

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

609

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

- ***Notes:***

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

Reclaim location. Sign is difficult to see trim tree.

582

- *As-Built Description:*

CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided.

- *Proposed Solution:*

Provide compliant parking signage that includes fine information.

PCODE **EA04G**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.6.2**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
585	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **47.5" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	50	SF	$135	**$6,750**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Common Area Circulation Routes

Cross Slope

587

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.5%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1
Severity 3

604

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **5.7%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

60 SF $75 **$4,500**

⊗ Staff Only

Priority 1
Severity 3

To and at eyewash station.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

590

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

12 LF $81 **$972**

○ Staff Only

Priority 1
Severity 3

Door

588

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **Up to 14.0%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

125 SF $120 **$15,000**

⊗ Staff Only

Priority 1
Severity 1

Occurs at all doors in the photo and the men's employee restroom.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
594	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **2.7% and 3.8%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	50	SF	$120	**$6,000**
603	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.6%. Dimensions vary.** • *Proposed Solution:* Modify surface slope at door. • ***Notes:***	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	250	SF	$120	**$30,000**

○ Staff Only

Priority 1

Severity 4

⊗ Staff Only

Priority 1

Severity 4

Verify whether these are maintenance areas and are not required to be on an accessible route. Occurs at entrance doors to employee workstations throughout.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Clearance

598

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.75" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

3 JOB $7,800 **$23,400**

○ Staff Only

Priority 1
Severity 4

Door Threshold

595

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0". Not beveled properly.**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

○ Staff Only

Priority 1
Severity 4

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
601	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **5.0"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	2	JOB	$1,200	**$2,400**

⊗ Staff Only

Priority 1

Severity 1

Lab

605	• *As-Built Description:* Minimum of at least one of each type of sink and other specialized equipment such as fume hoods, microscopes, emergency eyewash and showers, etc., associated with the special use activity is not accessible. (CA Only) • *As-Built:* **Eyewash station: 41.0" high** • *Proposed Solution:* Remodel existing cabinet/counter/equipment to make specialized equipment accessible to disabled persons.	*PCODE* **LB01B** *CBC 2007* **1106B.2** *CBC 2019* **11B-805.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

⊗ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

592

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **FE: 6.0” at 38.5” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

591

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Utility box: 10.0” at 46.0” high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 LF $300 **$300**

○ Staff Only

Priority 1
Severity 2

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
596	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **AC unit: 10.5" at 69.0" high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	4	LF	$300	**$1,200**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
597	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **AC Unit: 5.0" at 70.0" high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	4	LF	$300	**$1,200**

○ Staff Only

Priority 1

Severity 2

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
602	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **10.0" at 66.0" at air conditioning** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance. • ***Notes:***	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	8	LF	$300	**$2,400**

⊗ Staff Only

Priority 1

Severity 2

Dimensions vary.

Vending Machine

593	• *As-Built Description:* Vending machine coin slot or dispensing outlet, more than 48" above the floor. • *As-Built:* **12.0" to the bottom of the dispenser tray. 58.0" to bill insert.** • *Proposed Solution:* Advise vendor/leasing company to provide accessible vending machine with highest operable part at 48" max.	*PCODE* **IL02** *ADAAG 91* **4.2.5** *ADA 2010* **308.2.1** *CBC 2007* **1126B** *CBC 2019* **11B-308.2.1** **Mitigated:** ○ YES ◉ NO	1	REF		

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 EV Charging

Clear Floor Space

606

- *As-Built Description:*

EV charger station does not have 30" x 48" clear floor space.

- *Proposed Solution:*

Provide 30" x 48" clear floor space in front of charger station.

- ***Notes:***

PCODE **EV14**

CBC 2019 **11B-707.2**

Mitigated:

○ YES

◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 1

Severity 2

Clear floor space is obstructed by cars and wheel stops

EV Parking

607

- *As-Built Description:*

Electric Vehicle space is not 216 inches long and 108 inches wide. Van space shall be 144 inches.

- *Proposed Solution:*

Modify to provide an electric vehicle space including required access aisle.

- ***Notes:***

PCODE **EV04**

CBC 2019 **11B-812.6**

Mitigated:

○ YES

◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1

Severity 4

No striping at EV spaces.

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
608	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**

○ Staff Only

Priority 1

Severity 3

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Men's Restroom

Restroom

589

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Mens).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

Install directional signage.

Conceptual Costs for **Floor:** On-site **$255,459.00**

Facility: **Corporation Yard** Part: **Exterior** Floor: **On-site**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$255,459.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

557

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

40 JOB $225 **$9,000**

○ Staff Only

Priority 2
Severity 3

Door Closer

556

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.5 seconds.**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

30 JOB $75 **$2,250**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

552

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

30 JOB $450 **$13,500**

○ Staff Only

Priority 2
Severity 3

Door Stopper

554

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

50 JOB $75 **$3,750**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

568

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **Up to 1.0”**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

10 JOB $1,200 **$12,000**

○ Staff Only

Priority 2
Severity 4

Electrical

553

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **52.0” high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

100 JOB $900 **$90,000**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

569

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

20 JOB $270 **$5,400**

○ Staff Only

Priority 2
Severity 3

555

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

20 JOB $450 **$9,000**

○ Staff Only

Priority 2
Severity 4

Applies to public rooms, conference rooms, break rooms and restrooms.

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Unisex Restroom Public

Accessories

545

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 40.5" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Changes in Level

542

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route due to drain.

- *Proposed Solution:*

Adjust drain to correct abrupt change in level.

- ***Notes:***

PCODE **EF03NT**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

0.3" level change at WC.

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Coat Hook					
548	• *As-Built Description:* Accessible coat hook not within reach range. • *As-Built:* **60.0" high** • *Proposed Solution:* Adjust existing or provide new coat hook at maximum 48" height.	*PCODE* **WG03A** *ADAAG 91* **4.2.5** *ADA 2010* **603.4** *CBC 2007* **1118B.5** *CBC 2019* **11B-603.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
	Cross Slope					
543	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.9%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	25	SF	$75	**$1,875**

○ Staff Only

Priority 3

Severity 2

○ Staff Only

Priority 3

Severity 4

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

547

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 13.0"**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 1

Protrusion Limits

544

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate existing paper towel dispenser. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

541

• *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

• *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

540

• *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

• *As-Built:* **Not beveled or radiused.**
• *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
546	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **20.0" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Conference Room

Door Swing

558

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **7.0"**
- *Proposed Solution:*

Change door swing.

- ***Notes:***

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 3

Check exit door requirements before altering.

559

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **52.0"**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

549

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **12 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 2

Protrusion Limits

551

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **TV: 8.0" at 69.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

6 LF $300 **$1,800**

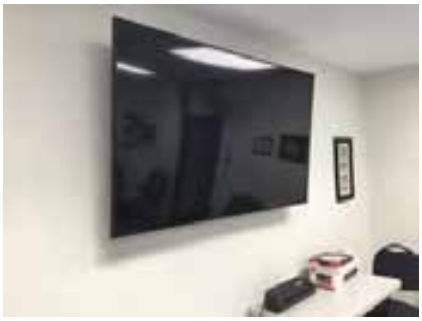

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Sink						
550	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.0" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 2

Severity 4

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Lobby

Brochure Bins

563

- *As-Built Description:*

Information brochure bins mounted above accessible height of 48".

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Relocate/remount bins at accessible height.

PCODE **IN08**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Door

567

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.7%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

561

- *As-Built Description:*

Drinking fountain bubbler more than 36" above floor.

- *As-Built:* **36.5" high**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA03C**
ADAAG 91 **4.15.2**
ADA 2010 **602.4**
CBC 2007 **1115B.4.6.4**
CBC 2019 **11B-602.4**

Mitigated:

○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 1

Severity 4

562

- *As-Built Description:*

Drinking fountain bubbler more than 36" above floor.

- *As-Built:* **High spout outlet 43.5" high**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA03C**
ADAAG 91 **4.15.2**
ADA 2010 **602.4**
CBC 2007 **1115B.4.6.4**
CBC 2019 **11B-602.4**

Mitigated:

○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

560

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Service counter: 12.5” at 32.0” high**
- *Proposed Solution:*

Add cane detectable side panels.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 1

565

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED: 7.0” at 43.5” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
566	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Display: 5.0" at 67.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface. • ***Notes:***	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

Try reversing the hooks at the top.

Reach Range

564	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **AED: 51.0" high** • *Proposed Solution:* Modify equipment or mounting. • ***Notes:***	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Conference/Lobby/Breakroom for S/B PW Staff

Door

574

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 4
Severity 3

At exit.

573

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **51.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 4
Severity 3

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Clearance

572

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.5" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

2 JOB $7,800 **$15,600**

○ Staff Only

Priority 4
Severity 4

Non-Fixed Desk

570

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
575	• *As-Built Description:* Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided. • *Proposed Solution:* Provide table or desk with accessible dimensions when purchasing new furniture.	*PCODE* **IN02A** *ADAAG 91* **4.32.3 & .4** *ADA 2010* **306.1** *CBC 2007* **1122B.3 & 4** *CBC 2019* **11B-306.1 & 11B-902.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,800	**$4,800**

○ Staff Only

Priority 4

Severity 2

Public Counter

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
571	• *As-Built Description:* Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided. • *As-Built:* **42.0”** • *Proposed Solution:* Retrofit existing counter to provide accessible section. Interim solution: Provide auxiliary counter, table, or clipboard. • ***Notes:*** **Appears unused ad counter.**	*PCODE* **IN03** *ADAAG 91* **7.2(2)** *ADA 2010* **904.4** *CBC 2007* **1122B.4** *CBC 2019* **11B-904.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 4

Severity 3

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Women's Restroom

Restroom

576

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Mens).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

Install directional signage.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Office Exit Door

Door Swing

599

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **6.0"**
- *Proposed Solution:*

Change door swing.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 3

Door Threshold

600

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 4

Conceptual Costs for **Floor:** First Floor **$317,820.00**

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$317,820.00**

Facility: **Corporation Yard** Part: **Interior** Floor: **First Floor**

Address: **1030 S. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Corporation Yard					**$573,279.00**

Access Compliance Survey Report

Fire Station 56

317 N. Lake Street

Facility #: 5

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Fire Station 56** Part: **Exterior** Floor: **On-site**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking

Minimum Number

501

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *As-Built:* **10 spaces 0 accessible provided.**
- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:

○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 1

Severity 3

Facility: **Fire Station 56** Part: **Exterior** Floor: **On-site**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Public Entrance

Changes in Level

508

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Not beveled.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 1
Severity 3

Curb Ramp

507

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 56** Part: **Exterior** Floor: **On-site**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

502

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Metal box: 13.0” at 31.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

505

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Metal box: 6.0” at 51.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 56** Part: **Exterior** Floor: **On-site**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Reach Range					
506	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **59.0" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** On-site **$9,552.00**

Facility: **Fire Station 56** Part: **Exterior** Floor: **On-site**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$9,552.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Alarm Signal

498

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

- ***Notes:***

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

⊗ Staff Only

Priority 4
Severity 3

See exception.

Carpet/Doormat

496

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

- ***Notes:***

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

10 JOB $225 **$2,250**

○ Staff Only

Priority 2
Severity 3

There is a mat in the public area of the lobby. These mats are in exits and do not appear stable, firm and slip resistant.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Clearance

471

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.8" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

10 JOB $7,800 **$78,000**

⊗ Staff Only

Priority 2
Severity 4

Door Hardware

470

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

10 JOB $450 **$4,500**

⊗ Staff Only

Priority 2
Severity 3

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Reach Range					
485	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **62.0" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	6	JOB	$300	**$1,800**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Kitchen, Dining, and Family Room

Coat Hook

468

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **60.0" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 4
Severity 2

Drinking Fountain

466

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

⊗ Staff Only

Priority 4
Severity 2

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 4

Severity 3

Electrical

465	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **Fan switch 58" high** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height.	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 3

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

464

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **36.0" high**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

⊗ Staff Only

Priority 4
Severity 2

Protrusion Limits

469

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **FE: 7.0" at 40.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
467	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **TV: 13.0" at 70.0"** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	6	LF	$300	**$1,800**

⊗ Staff Only

Priority 4

Severity 1

Reach Range

463	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **36.0" high obstructed side reach.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Seating

460

- *As-Built Description:*

At counter or bar where food or drink is served, min. 60" of accessible counter ,or accessible table seating within same area, not provided.

- *Proposed Solution:*

Provide accessible section (60" minimum length at max. 34" height, with min. 27" knee space) at counter.

- ***Notes:***

PCODE **FC04**
ADAAG 91 **5.2**
ADA 2010 **226.1**
CBC 2007 **1104B.5.4**
CBC 2019 **11B-226.3**

Mitigated:
○ YES
◉ NO

1 JOB $9,900 **$9,900**

⊗ Staff Only

Priority 4
Severity 3

Tray slide 48.0” or no 60.0” wide space at bar.

Sink

462

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **36.0” high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 2
Severity 4

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
461	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Lobby

Corridor

478

- *As-Built Description:*

Corridor less than 44" wide.

- *Proposed Solution:*

Enlarge corridor to 44" wide; relocate stud wall.

PCODE **IH03**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

6 LF $420 **$2,520**

○ Staff Only

Priority 1
Severity 4

Door

473

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *As-Built:* **4.0"**
- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
475	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **50.0" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 1

Severity 3

Door Clearance

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
500	• *As-Built Description:* Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open. • *As-Built:* **22.0" clear** • *Proposed Solution:* Provide new, larger door and frame with new accessible hardware.	*PCODE* **ID01** *ADAAG 91* **4.13.5** *ADA 2010* **404.2.3** *CBC 2007* **1133B.1.1.1.1** *CBC 2019* **11B-404.2.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

⊗ Staff Only

Priority 1

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

474

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **43.0”**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 4

Door Threshold

472

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **0.62”**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 4

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

476

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 1
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Public Counter

477

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **42.0" high**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Restroom

Door Swing

480

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **2.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 3
Severity 2

Restroom

479

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **137.0" x 133.0"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

Includes noncompliant shower.

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Bay

Carpet/Doormat

488

- *As-Built Description:*

Floormat not securely attached to ground or floor structure and creates abrupt vertical changes.

- *As-Built:* **0.75”**
- *Proposed Solution:*

Attach floormat to floor surface and have beveled edge and less than 1/2" high or remove floormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 2
Severity 3

Changes in Level

490

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 4
Severity 3

Compliant if this equipment still functions.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

484

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

10 SF $75 **$750**

○ Staff Only

Priority 4

Severity 3

If tours are conducted in this area, consider guiding the public through level areas by using signage.

Door

481

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **9.9%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

20 SF $120 **$2,400**

○ Staff Only

Priority 4

Severity 2

Verify if required exit.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

482

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **3.3"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

- ***Notes:***

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 4
Severity 2

Verify if required exit.

Door Threshold

483

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

○ Staff Only

Priority 4
Severity 4

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surface

487

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *Proposed Solution:*

Provide new grating, with grid openings 1/2" max. along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 SF $240 **$240**

○ Staff Only

Priority 4
Severity 2

Protrusion Limits

489

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **60.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 2

Ensure movable cords and hoses are retracted or extended during tours.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
491	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **FE: 8.0” at 36.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	7	JOB	$300	**$2,100**

○ Staff Only

Priority 4

Severity 3

486	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Electrical utility box: 12.0” at 57.0” high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance. • ***Notes:***	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	6	LF	$300	**$1,800**

○ Staff Only

Priority 4

Severity 1

This item does not appear to be in an exit. However consider if tours are conducted in the bay some form of protection may be warranted.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Laundry

Door

503

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **7.2%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

3 SF $120 **$360**

○ Staff Only

Priority 4
Severity 2

Install directional signage.

Door Stopper

504

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

2 JOB $75 **$150**

○ Staff Only

Priority 4
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

495

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **51.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Reach Range

494

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **52.0" high. Obstructed by 37.0" high sink.**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Sink

492

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **37.0" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 4
Severity 4

493

- *As-Built Description:*

Sink does not have clear floor space in front to allow for forward approach.

- *Proposed Solution:*

Relocate existing washer.

- ***Notes:***

PCODE **IN06ANT**
ADAAG 91 **4.24.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.2**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 4
Severity 2

Clear floor space at sink blocked by washer.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Living Quarters

Electrical

497

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **50.5" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:

○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Single-User Restroom

Restroom

499

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **59.5" x 109.0"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 3

Severity 2

Conceptual Costs for **Floor:** First Floor **$379,047.00**

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$379,047.00**

Facility: **Fire Station 56** Part: **Interior** Floor: **First Floor**

Address: **317 N. Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Fire Station 56					**$388,599.00**

Access Compliance Survey Report

Fire Station 57

200 S. Schnoor

Facility #: 7

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Fire Station 57** Part: **Exterior** Floor: **On-site**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Accessible Parking and Route to Entrance

Cross Slope

669

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.3%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

50 SF $75 **$3,750**

○ Staff Only

Priority 1
Severity 4

Door

668

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 57** Part: **Exterior** Floor: **On-site**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

667

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 4

Floor or Ground Surfaces

671

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 5.9%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

120 SF $36 **$4,320**

○ Staff Only

Priority 1
Severity 3

Facility: **Fire Station 57** Part: **Exterior** Floor: **On-site**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
670	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Provide locking gate that can be used from the parking or Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				
	Signage					
672	• *As-Built Description:* Sign showing the International Symbol of Accessibility (ISA) not provided at all accessible building entrances. • *Proposed Solution:* Provide building entrance signage with ISA signage at accessible entrance. • ***Notes:***	*PCODE* **SA12A** *ADAAG 91* **28 CFR 35.163** *ADA 2010* **(b)** **216.6** *CBC 2007* **1127B.3** *CBC 2019* **11B-216.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				
	No ISA					

Conceptual Costs for **Floor:** On-site **$11,910.00**

Facility: **Fire Station 57** Part: **Exterior** Floor: **On-site**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$11,910.00**

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

664

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

20 JOB $225 **$4,500**

○ Staff Only

Priority 2
Severity 3

Door Clearance

653

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.75" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

10 JOB $7,800 **$78,000**

⊗ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

658

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

20 JOB $450 **$9,000**

⊗ Staff Only

Priority 2
Severity 3

Door Stopper

665

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

652

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

20 JOB $900 **$18,000**

⊗ Staff Only

Priority 4
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Signage

673

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

20 JOB $450 **$9,000**

⊗ Staff Only

Priority 2
Severity 4

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Restroom

Restroom

654

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

⊗ Staff Only

Priority **3**

Severity **1**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Kitchen, Living Room, and Dining

Drinking Fountain

642

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

⊗ Staff Only

Priority 4
Severity 2

Electrical

646

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **27.0” deep. 47.0” high over 36.0” high obstruction**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

641

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **6 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

⊗ Staff Only

Priority 4
Severity 2

Protrusion Limits

650

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Bar counter: 7.5” at 47.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 4
Severity 3

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

645

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **51.0" high over 36.0" high obstruction**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 4
Severity 4

647

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **58.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 4
Severity 2

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
648	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **25.0" deep and 36.0" high obstruction** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		 ⊗ Staff Only ***Priority*** **4** ***Severity*** **4**				
651	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **FE: 67.0" high** • *Proposed Solution:* Mount lower than 48" and higher than 15".	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		 ⊗ Staff Only ***Priority*** **4** ***Severity*** **2**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Seating

649

- *As-Built Description:*

At counter or bar where food or drink is served, min. 60" of accessible counter ,or accessible table seating within same area, not provided.

- *Proposed Solution:*

Provide accessible section (60" minimum length at max. 34" height, with min. 27" knee space) at counter.

- ***Notes:***

PCODE **FC04**
ADAAG 91 **5.2**
ADA 2010 **226.1**
CBC 2007 **1104B.5.4**
CBC 2019 **11B-226.3**

Mitigated:
○ YES
◉ NO

1 JOB $9,900 **$9,900**

⊗ Staff Only

Priority 4
Severity 3

No 60.0" wide lower section at bar.

Sink

643

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **36.5" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 4
Severity 4

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
644	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Apparatus Bay

Cross Slope

657

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

30 SF $75 **$2,250**

○ Staff Only

Priority 4
Severity 3

If tours are conducted in this area, consider guiding the public through level areas by using signage.

Door Swing

656

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **2.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed. Add signage as appropriate.

- ***Notes:***

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 4
Severity 2

Verify whether this is a required exit.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Threshold					
655	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **1.5"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	6	JOB	$1,200	**$7,200**
		 ⊗ Staff Only ***Priority*** **4** ***Severity*** **3**				
	Signage					
674	• *As-Built Description:* Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant. • *Proposed Solution:* Provide signage sufficient to guide persons to the front bay for access.	*PCODE* **SA01** *ADAAG 91* **4.1.2(7)(c)** *ADA 2010* **216.6** *CBC 2007* **1117B.5.8.1.2** *CBC 2019* **11B-216.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$690	**$690**
		 ○ Staff Only ***Priority*** **4** ***Severity*** **3**				

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Apparatus Bay Restroom

Restroom

659

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **59.0" x 112.0"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

○ Staff Only

Priority 3

Severity 2

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Lobby and Front Offices

Access Route

663

- *As-Built Description:*

Access route, for occupant load less than 10, less than 36" wide.

- *As-Built:* **29.0" wide**
- *Proposed Solution:*

Remove or relocate furniture and storage items.

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 3

Door Swing

660

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **47.0"**
- *Proposed Solution:*

Change door swing.

- ***Notes:***

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 1
Severity 3

Staff says, the door can be removed.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
661	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **44.5"** • *Proposed Solution:* Remove or relocate furniture or storage items. • ***Notes:***	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 1

Severity 4

Staff says, entry cabinets can be removed.

Door Threshold

666	• *As-Built Description:* Existing threshold at door is 1/2" high or less but without a beveled edge on both sides. • *As-Built:* **0.7" not beveled** • *Proposed Solution:* Modify threshold to have beveled edge on each side.	*PCODE* **ID02** *ADAAG 91* **4.1.6(3)(d)(ii)** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 4

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Public Counter						
662	• *As-Built Description:* Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided. • *As-Built:* **42.0" high** • *Proposed Solution:* Retrofit existing counter to provide accessible section. Interim solution: Provide auxiliary counter, table, or clipboard.	*PCODE* **IN03** *ADAAG 91* **7.2(2)** *ADA 2010* **904.4** *CBC 2007* **1122B.4** *CBC 2019* **11B-904.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** First Floor **$374,340.00**

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$374,340.00**

Facility: **Fire Station 57** Part: **Interior** Floor: **First Floor**

Address: **200 S. Schnoor** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Fire Station 57					**$386,250.00**

Access Compliance Survey Report

McNally Park

825 South A Street

Facility #: 8

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **McNally Park** Part: **Exterior** Floor: **On-site**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Accessible Route

1714

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

30 LF $135 **$4,050**

○ Staff Only

Priority 1
Severity 3

1715

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

40 LF $135 **$5,400**

○ Staff Only

Priority 1
Severity 3

Consider installing an accessible route to more than one picnic table in order to provide options. There are 6 picnic tables aside from the ones in the group picnic area.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1739	• *As-Built Description:* No walk / sidewalk provided to connect accessible facilities or elements that are on the same site. • *Proposed Solution:* Provide new 48" wide walk / sidewalk. • ***Notes:***	*PCODE* **EF13** *ADAAG 91* **4.3.2** *ADA 2010* **206.1** *CBC 2007* **1114B.1.2** *CBC 2019* **11B-206.1** **Mitigated:** ○ YES ◉ NO	60	LF	$135	**$8,100**

○ Staff Only

Priority 1

Severity 3

Route to basketball court, bench, recycling and stand-alone trash can is over grass which appears not to be firm. In addition there are noncompliant level changes where the grass meets the concrete.

Changes in Level

1710	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **Up to 1.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	40	LF	$63	**$2,520**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

1712

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 2

1713

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Facility: **McNally Park** Part: **Exterior** Floor: **On-site**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Picnic Area

1734

- *As-Built Description:*

No hard-surfaced accessible spaces at picnic table, B.B.Q. grill and/or bench.

- *Proposed Solution:*

Provide paved accessible spaces for sitting and turning at picnic table, B.B.Q. grill and/or bench.

- ***Notes:***

PCODE **NA07**
CBC 2007 **1132B.1**
CBC 2019 **11B-246.5**

Mitigated:
○ YES
◉ NO

100 SF $18 **$1,800**

○ Staff Only

Priority 1
Severity 4

22.0” wide route around picnic table. Extend surface at accessible tables.

Protrusion Limits

1711

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

8 JOB $300 **$2,400**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Playground

Changes in Level

1709

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

5 LF $240 **$1,200**

○ Staff Only

Priority 1
Severity 3

Handrail

1708

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

PCODE **ED08**
CBC 2007 **1133B.5.7**
CBC 2019 **Section 1013.2; 1013.3**

Mitigated:
○ YES
◉ NO

90 LF $360 **$32,400**

○ Staff Only

Priority 1
Severity 2

Facility: **McNally Park** Part: **Exterior** Floor: **On-site**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Surfacing

1706

- *As-Built Description:*

Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951

- *Proposed Solution:*

Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.

- ***Notes:***

Surface is shredded tires.

PCODE **OA01**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.2.6
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.2.6**

Mitigated:
○ YES
◉ NO

5000 SF $27 **$135,000**

○ Staff Only

Priority 1
Severity 4

Tread Surface

1707

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

64 LF $27 **$1,728**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Group Picnic Area

Accessible Route

1735

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 1
Severity 3

Changes in Level

1738

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 SF $63 **$1,260**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Drinking Fountain					
1736	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**
						○ Staff Only
						Priority 3 ***Severity*** 2
1737	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**
						○ Staff Only
						Priority 3 ***Severity*** 3

Conceptual Costs for **Floor:** On-site **$213,558.00**

Facility: **McNally Park** Part: **Exterior** Floor: **On-site**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$213,558.00**

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Men's Restroom

Accessories

1716

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Cross Slope

1720

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify cross slope. Adjust drain as needed.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

2 SF $75 **$150**

○ Staff Only

Priority 3
Severity 4

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1724

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **up to 3.0%**
  1.0" level change
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 3
Severity 4

1721

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **50.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

1728

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.0 second**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:

○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3

Severity 2

Grab Bars

1717

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1718

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Signage

1723

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **5.0" from door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1722	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *As-Built:* **Braille 1.0" from characters** • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing). • ***Notes:***	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Toilet Stall

1719	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **53.5" to lavatory** • *Proposed Solution:* Remove adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 1

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Women's Restroom

Accessories

1733

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Cross Slope

1731

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.6%**
- *Proposed Solution:*

Modify cross slope. adjust drain as needed.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

2 SF $75 **$150**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1725

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **Up to 3.0%**
  0.5" level change
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 3
Severity 4

1729

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7.7**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 3
Severity 2

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

1727

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.0 second**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:

○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3

Severity 2

Grab Bars

1732

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1730

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Signage

1726

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **5.0" from door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Conceptual Costs for **Floor:** First Floor **$18,930.00**

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$18,930.00**

Facility: **McNally Park** Part: **Interior** Floor: **First Floor**

Address: **825 South A Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** McNally Park					**$232,488.00**

Access Compliance Survey Report

Old Train Depot

120 N. E Street

Facility #: 102

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Detectable Warning

186

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

120 LF $81 **$9,720**

○ Staff Only

Priority 1
Severity 3

Door

184

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **Up to 5.4%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

150 SF $120 **$18,000**

○ Staff Only

Priority 2
Severity 3

These occurs at all entrance doors except the doors that are inaccessible due to a 27.0” clear width.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

185

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority ***1***

0

The directional signage throughout directs to inaccessible entrances and routes. Assess proper signage once the door slopes and route slopes are modified.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking West

Floor or Ground Surfaces

171

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 4.8%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

200 SF $36 **$7,200**

○ Staff Only

Priority 1
Severity 3

Parking

174

- *As-Built Description:*

Wheel stops provided do not effectively prevent the encroachment of vehicles over the required clear width of an adjacent accessible route.

- *Proposed Solution:*

Install wheel stops to effectively prevent encroachment.

PCODE **EA04J**
CBC 2019 **11B-502.7.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
173	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 1

Severity 3

Parking Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
172	• *As-Built Description:* Sign relating to parking privileges for disabled persons is non-compliant. • *Proposed Solution:* Provide compliant parking signage that does not contain the word "Handicapped". • ***Notes:***	*PCODE* **EA04F** *ADA 2010* **502.6** *CBC 2007* **VC §22511.9.** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

Also no fine sign.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Parking West to Entrances

Cross Slope

175

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.7%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

120 SF $75 **$9,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Parking East to Entrances

Changes in Level

177 • *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

• *As-Built:* **2.0"**

• *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

40 LF $63 **$2,520**

○ Staff Only

Priority 1
Severity 3

Cross Slope

176 • *As-Built Description:*

Cross slope more than 1":48" (2.083%).

• *As-Built:* **Up to 3.7%**

• *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
178	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	3	JOB	$300	**$900**

○ Staff Only

Priority 1

Severity 2

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Parking East

Floor or Ground Surfaces

180

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 4.0%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

200 SF $36 **$7,200**

○ Staff Only

Priority 1
Severity 3

Identification

182

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

- ***Notes:***

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1
Severity 4

No van sign.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
181	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				
179	• *As-Built Description:* Accessible parking space(s) not located close to the nearest possible entrance on an accessible route. • *Proposed Solution:* Relocate accessible parking space(s).	*PCODE* **EA06** *ADAAG 91* **4.6.2** *ADA 2010* **208.3** *CBC 2007* **1129B.1** *CBC 2019* **11B-208.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
183	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *As-Built:* **Incomplete information. Verbiage incorrect.** • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Accessible Route from E Yosemite

Changes in Level

252

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 LF $63 **$252**

○ Staff Only

Priority 1
Severity 3

Protrusion Limits

187

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

According to city officials, this walk is not on city property.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Walk

251

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **8.2%**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

40 SF $75 **$3,000**

○ Staff Only

Priority 1
Severity 4

188

- *As-Built Description:*

Walk more than 36" but less than 48" wide (required in CA only).

- *Proposed Solution:*

Enlarge width of walk to 48".

- ***Notes:***

PCODE **EF08**
CBC 2007 **1133B.7.1**
CBC 2019 **11B-403.5.1.3**

Mitigated:
○ YES
◉ NO

40 SF $135 **$5,400**

○ Staff Only

Priority 1
Severity 3

Relocate trash dumpsters and maintain accessible path.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Accessible Route from E Street

Walk

253

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **9.2%**
- *Proposed Solution:*

Install walk.

- ***Notes:***

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

100 SF $150 **$15,000**

○ Staff Only

Priority 1

Severity 3

Requires the use of driveway.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Stairs from E Street

Height

257

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosing.

- *As-Built:* **32.0" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

- ***Notes:***

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:

○ YES
◉ NO

20 LF $225 **$4,500**

○ Staff Only

Priority 1

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012.

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

256

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

4 JOB $510 **$2,040**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

255

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

24 LF $27 **$648**

○ Staff Only

Priority 1

Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Treads and Risers					
254	• *As-Built Description:* Steps do not have uniform riser height. • *As-Built:* **6.3" to 7.1" high** • *Proposed Solution:* Remodel stairs as needed.	*PCODE* **EC07A** *ADA 2010* **504.2** *CBC 2007* **1133B.4.5.3** *CBC 2019* **11B-504.2** **Mitigated:** ○ YES ◉ NO	12	LF	$225	**$2,700**

○ Staff Only

Priority 1

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Conceptual Costs for **Floor:** On-site **$109,545.00**

Facility: **Old Train Depot** Part: **Exterior** Floor: **On-site**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$109,545.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Alarm Signal

232

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

- ***Notes:***

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 4
Severity 3

See exception.
Exception: In existing facilities, visible alarms for fire alarm systems shall not be required except where an existing fire alarm system is upgraded or replaced, or a new fire alarm system is installed.

Carpet/Doormat

231

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 2
Severity 3

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

246

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.5 seconds.**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 3

Door Swing

191

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

3 JOB $150 **$450**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

208

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

4 JOB $270 **$1,080**

○ Staff Only

Priority 2
Severity 3

250

- *As-Built Description:*

Accessible building entrance when not all are accessible not identified with a sign showing the International Symbol of Accessibility.

- *Proposed Solution:*

Provide building entrance sign that shows international symbol at accessible entrance.

- ***Notes:***

PCODE **SA12**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1127B.3**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

4 JOB $150 **$600**

○ Staff Only

Priority 2
Severity 3

No ISA (install only if doors/entrances are made accessible).

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
209	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	15	JOB	$450	**$6,750**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Main Office Restroom West

Accessories

196

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 56.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

197

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 48.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
193	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **4.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
200	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **45.7" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 3

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

203

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

5 SF $300 **$1,500**

○ Staff Only

Priority 3

Severity 3

Grab Bars

192

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 49.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:

○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
194	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **0.5" below the grab bar** • *Proposed Solution:* Raise the grab bar.	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
195	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 7.7" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
201	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **26.7" knee high** • *Proposed Solution:* Remount compliant fixture to accessible height.	*PCODE* **WD04A** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 2				
202	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 3				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

198

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Signage

189

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
190	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

199	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **51.0" to lavatory** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Main Office

Corridor

207

- *As-Built Description:*

Corridor, for occupant load less than 10, less than 36" wide.

- *Proposed Solution:*

Remove or relocate furniture and storage items.

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 4

Drinking Fountain

205

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 4
Severity 2

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
204	• *As-Built Description:* Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). Unit in good condition. • *As-Built:* **26.0" knee high** • *Proposed Solution:* Remount fountain at accessible height.	*PCODE* **IA02A** *ADAAG 91* **4.15.5(1)** *ADA 2010* **602.2** *CBC 2007* **1115B.4.6.2** *CBC 2019* **11B-602.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
206	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

248

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **FE cabinet: 5.2" at 40.3" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

Signage

249

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

PCODE **SA01**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1117B.5.8.1.2**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

2 JOB $690 **$1,380**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Conference

Assistive Listening

212

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) & 4.33.7**
ADA 2010 **219.1 & 706.1**
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 2
Severity 3

Corridor

210

- *As-Built Description:*

Corridor, for occupant load less than 10, less than 36" wide.

- *As-Built:* **33.5" accessible route for 60.0" long.**
- *Proposed Solution:*

Remove or relocate furniture and storage items.

- ***Notes:***

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Relocate furniture.

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Reach Range					
211	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **36.0" high obstruction** • *Proposed Solution:* Modify counter.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 West Office

Door Swing

233

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **16.0”**
- *Proposed Solution:*

Reconfigure or relocate counter.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 4

217

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **3.0”**
- *Proposed Solution:*

Change door swing.

PCODE **ID24**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
216	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *Proposed Solution:* Remove or relocate furniture or storage items. • ***Notes:*** **Exit door.**	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 4

Severity 3

Drinking Fountain

214	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

215

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **FE Cabinet: 6.25” at 42.6” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Public Counter

213

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **28.0” long.**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Restroom West Office

Accessories

220

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **TPD: 56" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 2

221

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 46.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 3

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
223	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **4.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

⊗ Staff Only

Priority 3

Severity 3

228	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **48.0" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

⊗ Staff Only

Priority 3

Severity 3

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Clear Floor Space

225

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *As-Built:* **2.8%**
- *Proposed Solution:*

Modify surface and/or adjust drain.

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 SF

⊗ Staff Only

Priority 3
Severity 4

Grab Bars

224

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 49.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

⊗ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
222	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 5.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

⊗ Staff Only

Priority 3

Severity 4

Lavatory

229	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **26.6" knee high** • *Proposed Solution:* Remount compliant fixture to accessible height.	*PCODE* **WD04A** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

⊗ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
230	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

⊗ Staff Only

Priority 3

Severity 3

Protrusion Limits

226	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

218

• *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

• *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

⊗ Staff Only

Priority 3
Severity 3

219

• *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

• *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

⊗ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
227	**Toilet Stall** • *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **51.0" to lavatory** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

⊗ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Restroom East Office

Accessories

236

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 56.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

237

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 48.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
244	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **4.0" in front** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
		○ Staff Only				
		Priority 3 ***Severity*** 3				
241	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **46.2" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**
		○ Staff Only				
		Priority 3 ***Severity*** 3				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

243

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 49.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 2

240

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **SCD: 6.5” above grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Lavatory						
242	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Protrusion Limits						
238	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

234

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

235

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

239

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **57.0" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**

ADA 2010 **604.3.1; 604.3.2**

CBC 2007 **1115B.7.1.3**

CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:

○ YES

◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Water Closet

245

- *As-Built Description:*

CA only: In single-accommodation restroom less than 48" in front of water closet provided.

- *As-Built:* **42.0" to metal shelf**
- *Proposed Solution:*

Remodel restroom to provide at least 48" in front of water closet.

- ***Notes:***

PCODE **WB03A**

CBC 2007 **1115B.3.2.1**

CBC 2019 **11B-604.3.1**

Mitigated:

○ YES

◉ NO

1 JOB $15,000 **$15,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 East Office

Corridor

247

- *As-Built Description:*

Corridor, for occupant load less than 10, less than 36" wide.

- *As-Built:* **26.0" wide**
- *Proposed Solution:*

Remove or relocate furniture and storage items.

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4

Severity 3

Conceptual Costs for **Floor:** First Floor **$93,450.00**

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$93,450.00**

Facility: **Old Train Depot** Part: **Interior** Floor: **First Floor**

Address: **120 N. E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Old Train Depot					**$202,995.00**

Access Compliance Survey Report

Police Department

330 South C Street

Facility #: 117C

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Route to Entrance

Cross Slope

1522

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

100 SF $75 **$7,500**

○ Staff Only

Priority 1
Severity 4

Detectable Warning

1527

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

50 LF $81 **$4,050**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1535	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	50	LF	$81	**$4,050**

⊗ Staff Only

Priority 1

Severity 3

Door

1529	• *As-Built Description:* At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface. • *Proposed Solution:* Provide 10" min. "kick plate" covering width of door when altering area.	*PCODE* **ID06** *ADA 2010* **404.2.10** *CBC 2007* **1133B.2.6** *CBC 2019* **11B-404.2.10** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surface					
1528	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **Gaps 1.0" x 1.0"** • *Proposed Solution:* Fill gaps.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	10	LF	$240	**$2,400**
		○ Staff Only				
		Priority 1 ***Severity*** 2				
	Floor or Ground Surfaces					
1524	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 5.0%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	300	SF	$36	**$10,800**
		○ Staff Only				
		Priority 1 ***Severity*** 3				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1530	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **2.5%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	60	SF	$36	**$2,160**

⊗ Staff Only

Priority 1

Severity 4

Parking

1534	• *As-Built Description:* Accessible parking space does not have 5' wide access aisle; 8' wide for van accessible aisle. • *As-Built:* **Space and aisle together are 16.0' wide.** • *Proposed Solution:* Modify parking aisle(s) to create accessible space by restriping.	*PCODE* **EA02B** *ADAAG 91* **4.6.3** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2; 11B-502.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**

⊗ Staff Only

Priority 1

Severity 1

Facility: **Police Department** Part: **Exterior** Floor: **On-site**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1531	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
1533	• *As-Built Description:* No van parking provided (one in every 6 or fraction of 6 accessible spaces, but not less than one. • *Proposed Solution:* Provide van parking space(s) by restriping; provide van sign.	*PCODE* **EA07** *ADAAG 91* **4.1.2(5)(b)** *ADA 2010* **208.2; 502.1** *CBC 2007* **1129B.3.2** *CBC 2019* **11B-208.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,050	**$1,050**

⊗ Staff Only

Priority 1

Severity 3

⊗ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

1526

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

1525

- *As-Built Description:*

CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided.

- *Proposed Solution:*

Provide compliant parking signage that includes fine information.

PCODE **EA04G**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.6.2**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

Facility: **Police Department** Part: **Exterior** Floor: **On-site**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1532	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 1

Severity 3

Reach Range

1523	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **49.5" high** • *Proposed Solution:* Modify equipment or mounting. • ***Notes:***	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Conceptual Costs for **Floor:** On-site **$35,145.00**

Facility: **Police Department** Part: **Exterior** Floor: **On-site**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$35,145.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

1473

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

10 JOB $225 **$2,250**

⊗ Staff Only

Priority 2
Severity 3

Door

1470

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **46.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

20 JOB $7,500 **$150,000**

⊗ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Stopper

1469

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

20 JOB $75 **$1,500**

⊗ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Door Threshold

1471

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **Up to 1.0”**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

⊗ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

1477

• *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

• *As-Built:* **48.25" high**
50.0" to top of box

• *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

• ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

30 JOB $900 **$27,000**

⊗ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Protrusion Limits

1468

• *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

• *As-Built:* **Key cabinet: 8.0" at 45.0" high**

• *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

• ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2

Severity 3

Appears to be on an exit route.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Women's Restroom

Accessories

1430

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 45.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3

Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1443	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **Shower room SD: 42.0" high** • *Proposed Solution:* Relocate existing restroom accessories. • ***Notes:***	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1444	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **Shower room PTD: 45.0" high** • *Proposed Solution:* Relocate existing restroom accessories. • ***Notes:***	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1435	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **10.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
	 ⊗ Staff Only ***Priority*** 3 ***Severity*** 4					
1429	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **45.5" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**
	 ⊗ Staff Only ***Priority*** 3 ***Severity*** 3					

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Coat Hook

1431

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **48.5" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 3
Severity 4

Door Swing

1445

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1434

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.5" on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

⊗ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Lavatory

1442

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **34.25" in shower room**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

⊗ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1426

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.5" high**
- *Proposed Solution:*

Trim apron.

- ***Notes:***

PCODE **WD03**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 3

Severity 2

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1427

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Locker Facilities

1437

- *As-Built Description:*

No section of bench provided adjacent to designated accessible locker, measuring minimum 20-24" deep, 48" wide, and 17-19" high, and fixed to a wall along the longer dimension.

- *Proposed Solution:*

Provide a new bench, fixed to a wall along the longer dimension, close to the accessible locker.

PCODE **GG03**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $2,250 **$2,250**

⊗ Staff Only

Priority 3

Severity 3

Protrusion Limits

1428

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0" at 42.0" to 53.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1436	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Shelf: 5.0" at 47.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 4

Shower

1440	• *As-Built Description:* Shower not accessible; multiple compliance violations. • *Proposed Solution:* Provide accessible shower. • ***Notes:***	*PCODE* **WF01** *ADAAG 91* **4.21** *ADA 2010* **608.1** *CBC 2019* **11B-608.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$12,000	**$12,000**

⊗ Staff Only

Priority 3

Severity 3

Incorrect configuration.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1438	• *As-Built Description:* Floor surface sloped greater than 2.0% (1:48) due to drain. • *As-Built:* **4.0%** • *Proposed Solution:* Remodel floor surface to compliance.	*PCODE* **WF06A** *ADA 2010* **608.9** *CBC 2019* **11B-608.9** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

1439	• *As-Built Description:* ADAAG: L-shaped shower seat extending the full depth of the stall does not have a seat located 1-1/2" max. from the wall and/or have the front of the seat (nearest to the opening) extend 16" max. from the wall. The back of the seat (against the back wall) shall extend 23" max. from the side wall and shall be 15" max. deep. • *As-Built:* **4.5" from wall and below grab bar.** • *Proposed Solution:* Provide new, or relocate, folding wall-mounted shower seat.	*PCODE* **WF07AREF** *ADAAG 91* **4.21.3** *ADA 2010* **610.3.2** *CBC 2007* **1115B.4.4.8.1** *CBC 2019* **11B-610.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,650	**$1,650**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1441	• *As-Built Description:* Grab bar not mounted between 33" to 36" above the shower floor. • *Proposed Solution:* Remount grab bar in shower. • ***Notes:***	*PCODE* **WF08** *ADAAG 91* **Fig. 37(a)** *ADA 2010* **608.3** *CBC 2007* **1115B.4.4.8.2** *CBC 2019* **11B-608.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

Grab bar 6.2” from wall.

Signage

1466	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *As-Built:* **Not domed Braille.** • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Stall Door

1432

- *As-Built Description:*

Stall door to accessible compartment not self closing.

- *Proposed Solution:*

Adjust closer.

PCODE **WB05B**
ADAAG 91 **4.22.4**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.4**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

⊗ Staff Only

Priority 3
Severity 4

Water Closet

1433

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.25" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

- ***Notes:***

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 3
Severity 4

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Men's Restroom

Accessories

1447

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 44.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3

Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1449	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **PTD: 45.0" high** • *Proposed Solution:* Relocate existing restroom accessories. • ***Notes:***	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1457	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **PTD: 51.0" high** • *Proposed Solution:* Relocate existing restroom accessories.	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 2

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1458	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **SD: 45.0" high** • *Proposed Solution:* Relocate existing restroom accessories. • ***Notes:***	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1464	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **11.0" in front** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

⊗ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1448	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **45.0" high** • *Proposed Solution:* Relocate or provide new accessible mirror. • ***Notes:*** **Shower area.**	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**
1459	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **45.0" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

⊗ Staff Only

Priority 3

Severity 3

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

1452

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

16 SF $75 **$1,200**

⊗ Staff Only

Priority 3

Severity 3

Shower area.

Door Swing

1456

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

2 JOB $7,800 **$15,600**

⊗ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1463

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.5" on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

⊗ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Lavatory

1450

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.5" high**
- *Proposed Solution:*

Trim apron.

- ***Notes:***

PCODE **WD03**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 3
Severity 2

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1460	• *As-Built Description:* Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high. • *As-Built:* **28.2" high** • *Proposed Solution:* Trim apron. • ***Notes:***	*PCODE* **WD03** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3.3** *CBC 2019* **11B-306.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 2

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1451	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe. • ***Notes:***	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

⊗ Staff Only

Priority 3

Severity 3

Shower area.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1461	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

⊗ Staff Only

Priority 3

Severity 3

Locker Facilities

1446	• *As-Built Description:* No section of bench provided adjacent to designated accessible locker, measuring minimum 20-24” deep, 48” wide, and 17-19” high, and fixed to a wall along the longer dimension. • *Proposed Solution:* Provide a new bench, fixed to a wall along the longer dimension, close to the accessible locker.	*PCODE* **GG03** *ADAAG 91* **4.35.4** *ADA 2010* **803.4** *CBC 2007* **1117B.8** *CBC 2019* **11B-803.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,250	**$2,250**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Shower					
1455	• *As-Built Description:* Shower not accessible; multiple compliance violations. • *Proposed Solution:* Provide accessible shower. • ***Notes:***	*PCODE* **WF01** *ADAAG 91* **4.21** *ADA 2010* **608.1** *CBC 2019* **11B-608.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$12,000	**$12,000**
	Incorrect configuration.					
1453	• *As-Built Description:* Floor surface sloped greater than 2.0% (1:48) due to drain. • *As-Built:* **3.5%** • *Proposed Solution:* Remodel floor surface to compliance.	*PCODE* **WF06A** *ADA 2010* **608.9** *CBC 2019* **11B-608.9** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

⊗ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1454	• *As-Built Description:* ADAAG: L-shaped shower seat extending the full depth of the stall does not have a seat located 1-1/2" max. from the wall and/or have the front of the seat (nearest to the opening) extend 16" max. from the wall. The back of the seat (against the back wall) shall extend 23" max. from the side wall and shall be 15" max. deep. • *As-Built:* **4.5" from wall. Below grab bar.** • *Proposed Solution:* Provide new, or relocate, folding wall-mounted shower seat.	*PCODE* **WF07AREF** *ADAAG 91* **4.21.3** *ADA 2010* **610.3.2** *CBC 2007* **1115B.4.4.8.1** *CBC 2019* **11B-610.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,650	**$1,650**

⊗ Staff Only

Priority 3

Severity 3

Stall Door

1462	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

⊗ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Squad Room

Assistive Listening

1467

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) & 4.33.7**
ADA 2010 **219.1 & 706.1**
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:
○ YES
◉ NO

1 JOB

⊗ Staff Only

Priority 2
Severity 3

Public Participation Counter

1465

- *As-Built Description:*

Speaker podium is not accessible. Upper edge of podium is more than 34" above the finished floor, and knee space is less than 27" high, 30" wide, and 19" deep.

- *Proposed Solution:*

Provide additional, integrated, and accessible speaker podium.

PCODE **GB02A**
ADAAG 91 **4.32.3**
ADA 2010 **902.3**
CBC 2007 **1122B.3**
CBC 2019 **11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

⊗ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Exit Door

Door Swing

1472

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **5.0" to fire arms discharge.**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Evidence Room

Door Swing

1474

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **1.0”**
- *Proposed Solution:*

Relocate counter.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 4
Severity 2

Lab

1476

- *As-Built Description:*

Minimum of at least one of each type of sink and other specialized equipment such as fume hoods, microscopes, emergency eyewash and showers, etc., associated with the special use activity is not accessible. (CA Only)

- *As-Built:* **35” high**
- *Proposed Solution:*

Remodel existing cabinet/counter to make specialized equipment accessible to disabled persons.

PCODE **LB01B**
CBC 2007 **1106B.2**
CBC 2019 **11B-805.7**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

⊗ Staff Only

Priority 4
Severity 3

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
1475	• *As-Built Description:* Lavatory: Fixture rim or counter height more than 34" above floor. • *As-Built:* **34.5" high** • *Proposed Solution:* Remount compliant fixture at accessible height.	*PCODE* **WD02A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,700	**$2,700**

⊗ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Breakroom

Non-Fixed Desk

1481

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **10 seats 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 2
Severity 2

Reach Range

1479

- *As-Built Description:*

Reach height to control or access point, exceeds 48" or is less than 15".

- *As-Built:* **First Aid Kit 54.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE01**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1480	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **57.0" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 2

Severity 4

Sink

1478	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **34.2" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Entrance Door

Door Swing

1482

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **14.0”**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Interview Room

Door Swing

1483

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **45.5" to desk.**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

- ***Notes:***

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Door operated by staff.

1484

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **44.5" to desk.**
- *Proposed Solution:*

Remove latch.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Interview Room Restroom

Accessories

1486

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 52.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

1493

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1488	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **40.5" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 3

Grab Bars

1491	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 21.5" on wide side** • *Proposed Solution:* Provide or relocate accessible rear grab bar. • ***Notes:***	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1489

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.75" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1490

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1485

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled. No contrast.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**

CBC 2007 **1115B.6**

CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES

◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1487

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **53.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**

ADA 2010 **604.3.1; 604.3.2**

CBC 2007 **1115B.7.1.3**

CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:

○ YES

◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1492	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **19.5" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Entrance Door

Door Swing

1494

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **22.0”**
- *Proposed Solution:*

Remove protruding wainscoting on concrete blocks.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Lobby

Door Swing

1520

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

- ***Notes:***

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 2

Lobby interview room.

Door Threshold

1519

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

1498

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). Unit in good condition.

- *As-Built:* **25.75" knee high**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA02A**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 1
Severity 2

Non-Fixed Desk

1521

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

- ***Notes:***

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 2

Lobby interview room.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

1496

- *As-Built Description:*

Sales and service counter: Accessible section not provided (knee space min. 27" high x 19" deep x 30" wide)

- *As-Built:* **32.0" wide**
  15.0" deep
- *Proposed Solution:*

Retrofit existing counter to provide accessible seating section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03A**
ADAAG 91 **4.32.3 & 4**
ADA 2010 **306.3; 904.4**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.3; 11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 2

Signage

1495

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **Wrong side.**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 3

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1497	• *As-Built Description:* Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters. • *As-Built:* **Sign reader not within 3.0" of sign.** • *Proposed Solution:* Install sign on shim. • ***Notes:***	*PCODE* **SA07** *ADAAG 91* **4.30.6** *ADA 2010* **703.4.1** *CBC 2007* **1117B.5.7** *CBC 2019* **11B-703.4.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 1

Severity 3

Obstructed by mullions.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Men's Restroom

Accessories

1501

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

1503

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.5" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 3

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

1502

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.9%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

12 SF $75 **$900**

○ Staff Only

Priority 3

Severity 4

Slopes occur in the circulation path and in the fixture CLFS. No level changes permitted.

Lavatory

1504

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.8" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:

○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1505	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
1507	• *As-Built Description:* Lavatory: Self-closing faucet at accessible lavatory does not remain open for at least 10 seconds. • *Proposed Solution:* Adjust self-closing faucet at accessible lavatory.	*PCODE* **WD07** *ADAAG 91* **4.19.5** *ADA 2010* **606.4** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 3

Severity 3

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1506	• *As-Built Description:* Lavatory/sink not accessible due to location within an inaccessible alcove of less than 36" wide. • *Proposed Solution:* Remodel partitions to provide necessary maneuvering space within the alcove. • ***Notes:***	*PCODE* **WD11** *ADA 2010* **305.7.1** *CBC 2019* **11B-305.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 2

24.5” deep x 34.0” wide alcove.

Protrusion Limits

1500	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **PTD: 8.0” at 35.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1508

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled. No contrast. 61.0" high.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**

CBC 2007 **1115B.6**

CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES

◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1499

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **51.0" to urinal**
- *Proposed Solution:*

Remove adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**

ADA 2010 **604.3.1; 604.3.2**

CBC 2007 **1115B.7.1.3**

CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:

○ YES

◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Women's Restroom

Accessories

1518

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

1517

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.7" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1512

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **44.0" to dispenser**
- *Proposed Solution:*

Relocate dispenser.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3

Severity 3

Lavatory

1515

- *As-Built Description:*

Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided.

- *As-Built:* **Pipes 9" from front of lavatory at 13.0" high.**
- *Proposed Solution:*

Reconfigure pipes.

PCODE **WD04A**
ADAAG 91 **Fig. 31**
ADA 2010 **306.3.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-306.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 2

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1516	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1513	• *As-Built Description:* Lavatory/sink not accessible due to location within an inaccessible alcove of less than 36" wide. • *Proposed Solution:* Remodel partitions to provide necessary maneuvering space within the alcove. • ***Notes:***	*PCODE* **WD11** *ADA 2010* **305.7.1** *CBC 2019* **11B-305.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 2

34.0" wide x 24.5" deep alcove. 25.0" wide including paper towel dispenser. Remove partition.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1514

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0" at 36.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Signage

1509

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled. No contrast.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

1510

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **43.0" to partition.**
- *Proposed Solution:*

Remove adjacent fixture and provide new enclosure at accessible water closet.

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

1511

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **54.0"**
- *Proposed Solution:*

Remove adjacent fixture and provide new enclosure at accessible water closet.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Conceptual Costs for **Floor:** First Floor **$346,125.00**

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$346,125.00**

Facility: **Police Department** Part: **Interior** Floor: **First Floor**

Address: **330 South C Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Police Department					**$381,270.00**

Access Compliance Survey Report

Rotary Park

800 N. Gateway Drive

Facility #: 121

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Floor or Ground Surface

1833

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **To 1.0" wide 1.0" deep**
- *Proposed Solution:*

Fill gaps.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

80 LF $240 **$19,200**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

1824

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

30 JOB $300 **$9,000**

○ Staff Only

Priority 1
Severity 2

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking SE of Skate Park

Cross Slope

1809

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

8 SF $75 **$600**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

1805

- *As-Built Description:*

Transition from road to gutter does not have a smooth transition.

- *Proposed Solution:*

Fill in gap/level change.

PCODE **EH02DNT**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

5 LF $150 **$750**

○ Staff Only

Priority 1
Severity 4

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1804	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **7.3%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1807	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **8.0%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**

○ Staff Only

Priority 1

Severity 4

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1808	• *As-Built Description:* Cross slope greater than 2%. • *As-Built:* **5.0%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02F** *ADAAG 91* **4.8.6** *ADA 2010* **405.3** *CBC 2007* **1133B.5.3.1** *CBC 2019* **11B-406.5.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 3

Floor or Ground Surfaces

1799	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 6.1%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	450	SF	$36	**$16,200**

○ Staff Only

Priority 1

Severity 3

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
1806	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				
1801	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1800	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 3

Parking Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1802	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1803	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Skate Park

Door

1814

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.8%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

4 SF $120 **$480**

○ Staff Only

Priority 1
Severity 4

Parking

1810

- *As-Built Description:*

Accessible parking space(s) not located close to the nearest possible entrance on an accessible route.

- *As-Built:* **There's no accessible parking at the skate park.**
- *Proposed Solution:*

Relocate accessible parking space(s).

PCODE **EA06**
ADAAG 91 **4.6.2**
ADA 2010 **208.3**
CBC 2007 **1129B.1**
CBC 2019 **11B-208.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

1813

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **42.0" high at snack bar**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

- ***Notes:***

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 3

Snack bar is currently not used.

Slope

1812

- *As-Built Description:*

Level 2% max. landing for ramp not provided.

- *As-Built:* **2.6%**
- *Proposed Solution:*

Grind surface.

PCODE **EB05A**
ADAAG 91 **4.8.4**
ADA 2010 **405.7.1**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.7.1**

Mitigated:
○ YES
◉ NO

8 SF $300 **$2,400**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

1811

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *As-Built:* **10.0" to bend. 12+" to center of down tube. Includes ramp.**
- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

16 JOB $510 **$8,160**

○ Staff Only

Priority 1

Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 NW Accessible Parking

Changes in Level

1839

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.7"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

7 LF $63 **$441**

○ Staff Only

Priority 1
Severity 4

Cross Slope

1838

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.1%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

500 SF $75 **$37,500**

○ Staff Only

Priority 1
Severity 4

Occurs along walk to south as well.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Curb Ramp					
1818	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **0.3"** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				
1819	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **7.3%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
1816	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **Approximately 170.0" long reduced by diagonal parking access aisle.** • *Proposed Solution:* Stripe straight in parking.	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$600	**$1,200**
1817	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1815	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Playground

Handrail

1821

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

40 LF $360 **$14,400**

○ Staff Only

Priority 1

Severity 2

Play Structure

1822

- *As-Built Description:*

Where transfer steps are provided to provide movement from transfer platforms to levels with elevated play components, each step shall have a level surface that is a minimum of 14" deep and 24" wide.

- *As-Built:* **23.875" wide**
- *Proposed Solution:*

Modify transfer steps to meet minimum surface dimensions.

PCODE **OC07A**

ADA 2010 **1008.3.2.1**

CBC 2019 **11B-1008.3.2.1**

Mitigated:

○ YES

◉ NO

1 JOB $750 **$750**

○ Staff Only

Priority 1

Severity 4

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Surfacing					
1820	• *As-Built Description:* **Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951** • *Proposed Solution:* **Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.** • ***Notes:*** **Shredded tires.**	*PCODE* **OA01** *ADAAG 91* **36 CFR Part** *ADA 2010* **1191** **1008.2.6** *CBC 2007* **DSA 99-02** *CBC 2019* **11B-1008.2.6** **Mitigated:** ○ YES ◉ NO	700	SF	$27	**$18,900**
	Tread Surface					
1823	• *As-Built Description:* The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread. • *Proposed Solution:* Provide contrasting color strips at all exterior stair treads.	*PCODE* **EC02** *ADA 2010* **504.4** *CBC 2007* **1133B.4.4** *CBC 2019* **11B-504.4.1** **Mitigated:** ○ YES ◉ NO	28	LF	$27	**$756**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Dog Parks

Accessible Route

1828

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Grade surface and install firm surfacing.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 1
Severity 3

Consider installing dog waste dispensers in the paved area. The route to the water may not be stable and firm.

Changes in Level

1834

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 1.0”**
- *Proposed Solution:*

Grind surface.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

40 LF $180 **$7,200**

○ Staff Only

Priority 1
Severity 4

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
1827	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Clear floor space slopes 9.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	24	SF	$75	**$1,800**
	Curb Ramp					
1831	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **1.0”** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 2

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1832	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **11.0%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**

○ Staff Only

Priority 1

Severity 3

Detectable Warning

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1830	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	10	LF	$81	**$810**

○ Staff Only

Priority 1

Severity 3

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door					
1825	• *As-Built Description:* At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface. • *Proposed Solution:* Provide 10" min. "kick plate" covering width of door when altering area.	*PCODE* **ID06** *ADA 2010* **404.2.10** *CBC 2007* **1133B.2.6** *CBC 2019* **11B-404.2.10** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**
	Handrails					
1837	• *As-Built Description:* Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas). • *Proposed Solution:* Provide new handrail for each side including extensions.	*PCODE* **ED01** *ADAAG 91* **4.8.5 & 4.9.4** *ADA 2010* **505.2** *CBC 2007* **1133B.4.1.1** *CBC 2019* **& .5.5 11B-505.2** **Mitigated:** ○ YES ◉ NO	8	LF	$285	**$2,280**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:

1,,,

2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Operable Part

1826

- *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

- *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 1
Severity 3

Parking

1829

- *As-Built Description:*

Accessible parking space(s) not located close to the nearest possible entrance on an accessible route.

- *Proposed Solution:*

Relocate accessible parking space(s).

- ***Notes:***

No accessible parking close to dog park.

PCODE **EA06**
ADAAG 91 **4.6.2**
ADA 2010 **208.3**
CBC 2007 **1129B.1**
CBC 2019 **11B-208.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

1836

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

1 JOB $510 **$510**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

1835

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

30 LF $27 **$810**

○ Staff Only

Priority 1

Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Group Picnic Gazebo

Changes in Level

2019

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

40 LF $63 **$2,520**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

2018

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **16.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 2

Occurs on the curb ramp adjacent to gutter

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2017	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **0.5"** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 3

Non-Fixed Desk

2016	• *As-Built Description:* Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided. • *As-Built:* **200 seats, 0 accessible provided.** • *Proposed Solution:* Provide table or desk with accessible dimensions when purchasing new furniture.	*PCODE* **IN02A** *ADAAG 91* **4.32.3 & .4** *ADA 2010* **306.1** *CBC 2007* **1122B.3 & 4** *CBC 2019* **11B-306.1 & 11B-902.3** **Mitigated:** ○ YES ◉ NO	10	JOB	$1,500	**$15,000**

○ Staff Only

Priority 1

Severity 2

Conceptual Costs for **Floor:** On-site **$216,687.00**

Facility: **Rotary Park** Part: **Exterior** Floor: **On-site**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$216,687.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Women's Restroom NW of Skate Park

Accessible Compartment

1752

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **4.5"**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig. 30(a)**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

1757

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **47.0" DMC**
- *Proposed Solution:*

Remodel compartment.

- ***Notes:***

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig. 30(a)**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Accessories

1754

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **16.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 2

Door Swing

1753

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **47.0"**
- *Proposed Solution:*

Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1756

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 51.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 3

1755

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **TPD: 1.0” below grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1759

- *As-Built Description:*

Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided.

- *As-Built:* **24.0". knee high**
  12.0" deep toe clearance.
- *Proposed Solution:*

Provide new accessible lavatory. Remodel restroom as needed.

PCODE **WD04**
ADAAG 91 **Fig. 31**
ADA 2010 **306.3.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-306.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 2

1758

- *As-Built Description:*

Lavatory/sink not accessible due to location within an inaccessible alcove of less than 36" wide.

- *Proposed Solution:*

Remodel partitions to provide necessary maneuvering space within the alcove.

- ***Notes:***

Alcove 30.5" wide x 48.0".

PCODE **WD11**
ADA 2010 **305.7.1**
CBC 2019 **11B-305.7.1**

Mitigated:
○ YES
◉ NO

1 REF

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1750

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **DF: 11.5" at 28.5" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 1

Defunct drinking fountain.

Signage

1760

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1761	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **62.0" high o.c.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1751	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **58.75" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Men's Restroom NW of Skate Park

Accessible Compartment

1769

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **46.0" DMC**
- *Proposed Solution:*

Remodel compartment.

- ***Notes:***

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig. 30(a)**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1772

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **4.5"**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig. 30(a)**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Accessories

1773

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **17.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 2

Clear Floor Space

1767

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *As-Built:* **2.4%**
  0.5" level change not beveled
- *Proposed Solution:*

Modify surface and/or adjust drain.

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 SF

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
1774	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 3.9%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	160	SF	$75	**$12,000**
	Door Swing					
1771	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **47.5”** • *Proposed Solution:* Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1766

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **16.0" o.c. to floor trim.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

1765

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **34.5" high**
- *Proposed Solution:*

Provide new accessible lavatory. Remodel restroom as needed.

PCODE **WD02**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $10,200 **$10,200**

○ Staff Only

Priority 3
Severity 4

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1764	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **15.0" deep toe clearance** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed.	*PCODE* **WD04** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 2

Signage

1762	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1763	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **65.0" high o.c.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1770	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **57.5" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Urinal

1768

- *As-Built Description:*

Fixture mounted with rim more than 17" above floor.

- *As-Built:* **18.0" high**
- *Proposed Solution:*

Provide accessible urinal. Remodel restroom as needed.

- ***Notes:***

Not elongated.

PCODE **WE02**
ADAAG 91 **4.18.2**
ADA 2010 **605.2**
CBC 2007 **1115B.4.2.1**
CBC 2019 **11B-605.2**

Mitigated:

○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom SE of Skate Park

Accessories

1787

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD & SD: 46.0" to 54.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 2

1796

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **14.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Changes in Level

1797

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 0.7”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 LF $63 **$504**

○ Staff Only

Priority 3
Severity 4

Cross Slope

1791

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **9.0%**
- *Proposed Solution:*

Modify cross slope. Adjust drain as needed.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

25 SF $75 **$1,875**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1798	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 3.1%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	60	SF	$75	**$4,500**

○ Staff Only

Priority 3

Severity 4

Grab Bars

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1794	• *As-Built Description:* Grab bars not provided or are not code compliant. • *Proposed Solution:* Provide accessible grab bars.	*PCODE* **WB07** *ADAAG 91* **4.17.6** *ADA 2010* **604.5** *CBC 2007* **1115B.4.1.3** *CBC 2019* **11B-604.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1795	• *As-Built Description:* Grab bars not at 33" to 36" from floor • *As-Built:* **37.0" high** • *Proposed Solution:* Relocate accessible grab bars.	*PCODE* **WB07C** *ADAAG 91* **4.16.4** *ADA 2010* **609.4** *CBC 2007* **1115B.4.1.3.1 & 2** *CBC 2019* **11B-609.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 4

Lavatory

1788	• *As-Built Description:* Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory). • *As-Built:* **16.5" o.c.** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed. • ***Notes:***	*PCODE* **WD01** *ADAAG 91* **4.19.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.2, 11B -606.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$10,200	**$10,200**

○ Staff Only

Priority 3

Severity 4

Complies with Safe Harbor and/or CBC if altered or constructed before January 2008.

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1789	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **15.0" deep toe clearance.** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed.	*PCODE* **WD04** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 2

Signage

1786	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1785	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1792	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **43.0" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Urinal

1790

- *As-Built Description:*

Fixture mounted with rim more than 17" above floor.

- *As-Built:* **18.0" high**
- *Proposed Solution:*

Provide accessible urinal. Remodel restroom as needed.

- ***Notes:***

PCODE **WE02**
ADAAG 91 **4.18.2**
ADA 2010 **605.2**
CBC 2007 **1115B.4.2.1**
CBC 2019 **11B-605.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 3
Severity 4

Not elongated.

Water Closet

1793

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **21.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Women's Restroom SE of Skate Park

Accessories

1784

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD & SD: 48.0" to 50.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 2

1780

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **11.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1779

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 53.5"**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 1

Lavatory

1783

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **16.0" o.c. from floor trim**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
1782	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **15.0" deep toe clearance.** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed.	*PCODE* **WD04** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 2

1781	• *As-Built Description:* Lavatory/sink not accessible due to location within an inaccessible alcove of less than 36" wide. • *Proposed Solution:* Remodel partitions to provide necessary maneuvering space within the alcove. • ***Notes:*** **31.0" wide x 49.0" alcove.**	*PCODE* **WD11** *ADA 2010* **305.7.1** *CBC 2019* **11B-305.7.1** **Mitigated:** ○ YES ◉ NO	1	REF		

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1775

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1776

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Toilet Stall					
1777	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **43.0" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 2

	Water Closet					
1778	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **21.0" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Conceptual Costs for **Floor:** First Floor **$127,104.00**

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$127,104.00**

Facility: **Rotary Park** Part: **Interior** Floor: **First Floor**

Address: **800 N. Gateway Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Rotary Park					**$343,791.00**

Access Compliance Survey Report

Madera Sunrise Rotary Sports Complex

1901 Clinton Avenue

Facility #: 122

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Accessible Route

1968

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

300 LF $135 **$40,500**

○ Staff Only

Priority 1
Severity 3

"11B-206.2.18 Area of sport activity. An accessible route shall be provided to the boundary of each area of sport activity." Consider what "boundary" means. Occurs throughout site.

Changes in Level

1874

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

60 LF $63 **$3,780**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
1873	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 4.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	1000	SF	$75	**$75,000**
		○ Staff Only				
		Priority 1 ***Severity*** 3				
	Floor or Ground Surface					
1914	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **1.0" wide x 1.0" deep** • *Proposed Solution:* Fill gaps.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	120	LF	$60	**$7,200**
		○ Staff Only				
		Priority 1 ***Severity*** 2				

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
1915	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	30	JOB	$150	**$4,500**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Ball Fields

Changes in Level

1865

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 2.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

150 LF $63 **$9,450**

○ Staff Only

Priority 1
Severity 3

Cross Slope

1866

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

400 SF $75 **$30,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1867	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **14.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	30	SF	$75	**$2,250**

○ Staff Only

Priority 1

Severity 1

Disabled Seating

1858	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *Proposed Solution:* Relocate bleachers. • ***Notes:*** **Wheelchair seats block circulation path.**	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$1,350	**$5,400**

○ Staff Only

Priority 1

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1868	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *Proposed Solution:* Remove fixed seating and provide wheelchair space plus necessary maneuvering clearance. • ***Notes:***	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$1,350	**$5,400**

○ Staff Only

Priority 1

Severity 3

Wheelchair seating blocks circulation path in team seating.

Drinking Fountain

1862	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	4	JOB	$6,000	**$24,000**

○ Staff Only

Priority 1

Severity 2

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1863	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	8	JOB	$1,500	**$12,000**

○ Staff Only

Priority 1

Severity 3

Floor or Ground Surface

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1864	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **1.0" x 4.0"** • *Proposed Solution:* Provide new grating, with grid openings 1/2" max. along the line of traffic flow.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	8	SF	$240	**$1,920**

○ Staff Only

Priority 1

Severity 2

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Handrail					
1861	• *As-Built Description:* Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only). • *As-Built:* **41.5" high** • *Proposed Solution:* Provide new guards, including handrail at ramp.	*PCODE* **ED08** *CBC 2007* **1133B.5.7** *CBC 2019* **Section 1013.2; 1013.3** **Mitigated:** ○ YES ◉ NO	40	LF	$120	**$4,800**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				
	Minimum Number					
1869	• *As-Built Description:* At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required • *Proposed Solution:* Provide required accessible parking space with sign including a minimum of one van space.	*PCODE* **EA01A** *ADAAG 91* **4.1.2(5)** *ADA 2010* **208.2** *CBC 2007* **Tbl. 11B-6** *CBC 2019* **11B-208.2 Tbl. 11B-208.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
1859	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	10	JOB	$300	**$3,000**
1860	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Bleacher: 9.0" at 47.0" high** • *Proposed Solution:* Add cane detection.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Pedestrian Bridge

Changes in Level

1871

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 2.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 1
Severity 3

Cross Slope

1870

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

400 SF $75 **$30,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
1872	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **Up to 6.0%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	50	SF	$75	**$3,750**

○ Staff Only

Priority 1

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Defunct Playground

Accessible Route

1920

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Relocate trash can.

- ***Notes:***

PCODE **EF13NT**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1
Severity 3

Route to trash can 10.0” wide at bench.

Cross Slope

1919

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.8%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

12 SF $75 **$900**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

1918

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 2

1917

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Surfacing

1916

- *As-Built Description:*

Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951

- *Proposed Solution:*

Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.

- ***Notes:***

Shredded tires surface.

PCODE **OA01**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.2.6
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.2.6**

Mitigated:

○ YES
◉ NO

1000 SF $27 **$27,000**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Group Picnic

Detectable Warning

1983

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

20 LF $81 **$1,620**

○ Staff Only

Priority 1
Severity 3

Minimum Number

1921

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Playgrounds

Handrail

1967

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *As-Built:* **38.0" to 39.5" high**
- *Proposed Solution:*

Provide new guards, including handrail at ramp.

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

60 LF $360 **$21,600**

○ Staff Only

Priority 1

Severity 4

Play Structure

1965

- *As-Built Description:*

Where transfer steps are provided to provide movement from transfer platforms to levels with elevated play components, each step shall have a level surface that is a minimum of 14" deep and 24" wide.

- *As-Built:* **23.875" wide**
- *Proposed Solution:*

Modify transfer steps to meet minimum surface dimensions.

PCODE **OC07A**

ADA 2010 **1008.3.2.1**

CBC 2019 **11B-1008.3.2.1**

Mitigated:

○ YES

◉ NO

1 JOB $750 **$750**

○ Staff Only

Priority 1

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Surfacing					
1964	• *As-Built Description:* **Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951** • *Proposed Solution:* **Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.** • ***Notes:*** **Shredded tires.**	*PCODE* **OA01** *ADAAG 91* **36 CFR Part** *ADA 2010* **1191** **1008.2.6** *CBC 2007* **DSA 99-02** *CBC 2019* **11B-1008.2.6** **Mitigated:** ○ YES ◉ NO	1400	SF	$27	**$37,800**
	Tread Surface					
1966	• *As-Built Description:* The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread. • *Proposed Solution:* Provide contrasting color strips at all exterior stair treads.	*PCODE* **EC02** *ADA 2010* **504.4** *CBC 2007* **1133B.4.4** *CBC 2019* **11B-504.4.1** **Mitigated:** ○ YES ◉ NO	44	LF	$27	**$1,188**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Parking at Playgrounds

Curb Ramp

1972

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **10.3%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 3

Floor or Ground Surfaces

1969

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **2.7%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

60 SF $36 **$2,160**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

1973

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

- ***Notes:***

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1
Severity 4

No van sign.

Parking

1970

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 93.0" long reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

- ***Notes:***

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Consider straight in parking.

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1971	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

Parking Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1974	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Parking Opposite Playgrounds

Curb Ramp

1980

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Gutter lip. No domes.

Floor or Ground Surfaces

1977

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **3.1%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

60 SF $36 **$2,160**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

1975

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

- ***Notes:***

No van sign.

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1
Severity 4

Minimum Number

1982

- *As-Built Description:*

At parking lot with 101-150 spaces, the number of accessible spaces is less than required by code; 5 spaces required.

- *As-Built:* **140 spaces, 4 accessible spaces provided**
- *Proposed Solution:*

Provide required accessible parking spaces with signs including a minimum of one van space.

PCODE **EA01E**
ADAAG 91 **4.1.2(5)***
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

1979

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 100.0" long reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

- ***Notes:***

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Consider straight in parking.

1976

- *As-Built Description:*

The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only).

- *Proposed Solution:*

Provide the words "NO PARKING" in each access aisle, painted in 12" high letters, when altering area.

PCODE **EA04D**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1978	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**
		○ Staff Only ***Priority*** 1 ***Severity*** 4				
	Walk					
1981	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **44.0" wide at picnic table.** • *Proposed Solution:* Enlarge width of walk to 48". • ***Notes:***	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	5	SF	$135	**$675**
		○ Staff Only ***Priority*** 1 ***Severity*** 4				
	The table appears to temporarily cover a hole.					

Conceptual Costs for **Floor:** On-site **$388,695.00**

Facility: **Madera Sunrise Rotary Sports** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$388,695.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Men's Restroom

Door Swing

1843

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **30.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 1

Door Threshold

1842

- *As-Built Description:*

Existing threshold at door is 1/2" high or less but without a beveled edge on both sides.

- *Proposed Solution:*

Modify threshold to have beveled edge on each side.

PCODE **ID02**
ADAAG 91 **4.1.6(3)(d)(ii)**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $750 **$750**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1845

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 52.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 3

1844

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.5” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
1848	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
		○ Staff Only				
		Priority 3 ***Severity*** 3				
	Signage					
1841	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**
		○ Staff Only				
		Priority 3 ***Severity*** 3				

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1840	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Stall Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1846	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Urinal					
1847	• *As-Built Description:* Fixture mounted with rim more than 17" above floor. • *As-Built:* **23.0" high** • *Proposed Solution:* Remount compliant fixture at accessible height.	*PCODE* **WE02A** *ADAAG 91* **4.18.2** *ADA 2010* **605.2** *CBC 2007* **1115B.4.2.1** *CBC 2019* **11B-605.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Women's Restroom

Cross Slope

1853

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.7%**
- *Proposed Solution:*

Modify cross slope. Adjust drain as needed.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

25 SF $75 **$1,875**

○ Staff Only

Priority 3
Severity 4

Door Swing

1854

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **29.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1855

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 52.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 3

1856

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1857	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 1.0" below grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

1851	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1849

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1850

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **61.5”**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
1852	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Unisex Restroom

Accessories

1882

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **Behind**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 1

Changes in Level

1891

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" level change at water closet.**
- *Proposed Solution:*

Correct abrupt change in level and adjust drain as needed.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1884

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

1885

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **53.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 2

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1881

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 52.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 3

1880

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 23.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1883	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **Flush control: 1.3" below grab bar** • *Proposed Solution:* Raise the grab bar.	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

1877	• *As-Built Description:* Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high. • *As-Built:* **28.7" high** • *Proposed Solution:* Remount compliant fixture to accessible height. • ***Notes:***	*PCODE* **WD03A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3.3** *CBC 2019* **11B-306.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1878	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

1875	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1876	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not contrast. 64.0" high o.c.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Water Closet

1879	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **19.0" to 26.0" due to diagonal wall.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall. Adjust side wall as needed.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Unisex Restroom

Accessories

1894

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **Behind the front of the water closet.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 1

Changes in Level

1890

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" level change at water closet.**
- *Proposed Solution:*

Correct abrupt change in level and adjust drain as needed.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1886

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **53.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 2

1887

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Grab Bars					
1893	• *As-Built Description:* Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet). • *As-Built:* **Extends 50.0”** • *Proposed Solution:* Provide or relocate accessible side grab bar.	*PCODE* **WB07A** *ADAAG 91* **Fig. 29(b)** *ADA 2010* **604.5.1** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **11B-604.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**
	Lavatory					
1896	• *As-Built Description:* Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high. • *As-Built:* **28.5” high** • *Proposed Solution:* Remount compliant fixture to accessible height. • ***Notes:***	*PCODE* **WD03A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3.3** *CBC 2019* **11B-306.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1895	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

1888	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1889	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not contrast 65.0" high o.c.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Water Closet

1892	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **16.75" to 26.0" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall. Adjust wall as needed.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Unisex Restroom

Accessories

1900

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **Behind the front of the water closet.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 1

Changes in Level

1899

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" level change at water closet.**
- *Proposed Solution:*

Correct abrupt change in level and adjust drain as needed.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1901

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 51.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 3

1902

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1898

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.5" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1897

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1903

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **19.0" to 29.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall. Adjust wall as needed.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3

Severity 1

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Unisex Restroom

Accessories

1904

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **Behind the front of the water closet.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 1

Drinking Fountain

1912

- *As-Built Description:*

Drinking fountain is not 18" - 19" in depth.

- *As-Built:* **14.0" deep**
- *Proposed Solution:*

Provide new, accessible fountain.

PCODE **IA02B**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.8**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.8**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1913	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Grab Bars

1907	• *As-Built Description:* Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet). • *As-Built:* **Extends 51.0”** • *Proposed Solution:* Provide or relocate accessible side grab bar.	*PCODE* **WB07A** *ADAAG 91* **Fig. 29(b)** *ADA 2010* **604.5.1** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **11B-604.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1905	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 22.5" on wide side** • *Proposed Solution:* Provide or relocate accessible rear grab bar.	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 4

Lavatory

1909	• *As-Built Description:* Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high. • *As-Built:* **28.8" high** • *Proposed Solution:* Remount compliant fixture to accessible height. • ***Notes:***	*PCODE* **WD03A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3.3** *CBC 2019* **11B-306.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1908	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1910	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1911	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not contrast. 65.0" high o.c.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Water Closet

1906	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **18.0" to 28.0" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall. Adjust wall as needed.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 1

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Women's Restroom

Accessories

1923

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **14.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Door

1928

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1925

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0" on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

1924

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **TPD: 3.0" above grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1926

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **16.5" o.c.**
- *Proposed Solution:*

Provide new accessible lavatory. Remodel restroom as needed.

- ***Notes:***

PCODE **WD01**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:

○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3

Severity 2

Complies with Safe Harbor and/or CBC if altered or constructed before January 2008.

1927

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Signage					
1922	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Men's Restroom

Accessories

1934

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **11.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Door

1937

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.5%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

3 SF $120 **$360**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1929	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **54.0" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 2

Drinking Fountain

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1938	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 2

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1939	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Grab Bars

1933	• *As-Built Description:* Grab bars not provided or are not code compliant. • *Proposed Solution:* Provide accessible grab bars.	*PCODE* **WB07** *ADAAG 91* **4.17.6** *ADA 2010* **604.5** *CBC 2007* **1115B.4.1.3** *CBC 2019* **11B-604.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1930	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

1936	• *As-Built Description:* Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory). • *As-Built:* **17.25" o.c.** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed. • ***Notes:***	*PCODE* **WD01** *ADAAG 91* **4.19.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.2, 11B -606.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 2

Complies with Safe Harbor and/or CBC if altered or constructed before January 2008.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1935	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

1931	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1932

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.25" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

- ***Notes:***

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 4

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Women's Restroom

Accessories

1945

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **11.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Door

1940

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.3%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Swing					
1943	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **40.0"** • *Proposed Solution:* Provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**
		 ○ Staff Only ***Priority*** **3** ***Severity*** **3**				
	Door Threshold					
1942	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.6"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**
		 ○ Staff Only ***Priority*** **3** ***Severity*** **4**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1947

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 23.5" on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

1944

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **TPD: 3.5" above grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
1948	• *As-Built Description:* Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high. • *As-Built:* **28.9" high** • *Proposed Solution:* Remount compliant fixture to accessible height. • ***Notes:***	*PCODE* **WD03A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3.3** *CBC 2019* **11B-306.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

	Protrusion Limits					
1963	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Counter: 5.0" at 36.0" high** • *Proposed Solution:* Add cane detectable side panels when renovating concession counter.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1941

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Toilet Stall

1949

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **57.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1961	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **51.0" to diagonal wall** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed.	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

Tray Pass-thru

1962	• *As-Built Description:* Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor. • *As-Built:* **36.0" high.** • *Proposed Solution:* Remodel pass-thru and counter to be 34" max. above floor.	*PCODE* **FB04** *ADAAG 91* **5.2** *ADA 2010* **902.3** *CBC 2007* **1122B.4** *CBC 2019* **11B-902.3** **Mitigated:** ○ YES ◉ NO	15	JOB	$9,900	**$148,500**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1946	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **20.0" high** • *Proposed Solution:* Lower accessible water closet.	*PCODE* **WB08** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Men's Restroom

Accessories

1960

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Door

1952

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1959

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **41.0”**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 3

Grab Bars

1958

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1953

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **14.0" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B-606.6**

Mitigated:

○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3

Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

1954

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1950

• *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

• *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1951

• *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

• *As-Built:* **61.0" high o.c.**
• *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

1955

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **43.0" to diagonal wall.**
- *Proposed Solution:*

Remodel restroom.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1956

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **59.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1957	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **19.5" high** • *Proposed Solution:* Lower accessible water closet.	*PCODE* **WB08** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 4

Conceptual Costs for **Floor:** First Floor **$294,615.00**

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$294,615.00**

Facility: **Madera Sunrise Rotary Sports** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Madera Sunrise Rotary Sports Complex					**$683,310.00**

Access Compliance Survey Report

John Wells Youth Center

701 E. 5th Street

Facility #: 126

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Floor or Ground Surface

970

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **1.0" x 4.0"**
- *Proposed Solution:*

Provide new grating, with grid openings 1/2" max. along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

4 SF $240 **$960**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

968

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Varies**
- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

30 JOB $120 **$3,600**

○ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Routes to Foyer

Changes in Level

971

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" and not beveled above 1/4"**
- *Proposed Solution:*

Grind offsets.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 LF $63 **$252**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

965

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **0.6"**
- *Proposed Solution:*

Recess the detectable warnings and modify concrete.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
967	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp. • ***Notes:***	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Domes 6.0” from sides.

Detectable Warning

966	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area. • ***Notes:***	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	20	LF	$81	**$1,620**

○ Staff Only

Priority 1

Severity 3

Detectable warning not contrast.

Facility: **John Wells Youth Center** Part: **Exterior** Floor: **On-site**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surfaces

972

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **5.0%**
- *Proposed Solution:*

Modify slope at accessible parking space.

- ***Notes:***

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

30 SF $36 **$1,080**

○ Staff Only

Priority 1
Severity 3

Occurs along edges and at curb ramp.

General Note

969

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**
CBC 2019 **11B-405.10**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 1
0

Accumulates water.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

973

- *As-Built Description:*

The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only).

- *Proposed Solution:*

Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.

- ***Notes:***

PCODE **EA04D**

CBC 2007 **1129B.3.1**

CBC 2019 **11B-502.3.3**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 4

Illegible.

Parking Signage

974

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

- ***Notes:***

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

Info. Words obscured.

Facility: **John Wells Youth Center** Part: **Exterior** Floor: **On-site**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
975	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area. • ***Notes:***	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

Info. Size and color.

Conceptual Costs for **Floor:** On-site **$12,012.00**

Facility: **John Wells Youth Center** Part: **Exterior** Floor: **On-site**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$12,012.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Gym

Door

979

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

20 SF $120 **$2,400**

○ Staff Only

Priority 2
Severity 4

Fire Alarm

1020

- *As-Built Description:*

Fire alarm pull stations not 42"-48" from floor to center. Note: Required only at new construction, or where mounting location was or is to be remodeled.

- *As-Built:* **50.0" high**
- *Proposed Solution:*

Remount fire alarm station to be 42" min., and 48" max. from floor to center.

PCODE **IC03**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **907.4.2**
CBC 2019 **907.4.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $825 **$1,650**

○ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Fixed Seating

977

- *As-Built Description:*

At least one fixed companion seat next to each wheelchair seating area is not provided.

- *Proposed Solution:*

Provide one companion seat next to each accessible wheelchair space(s).

- ***Notes:***

PCODE **GE01B**
ADAAG 91 **4.33.3**
ADA 2010 **221.3**
CBC 2007 **1104B.3.5**
CBC 2019 **11B-221.3**

Mitigated:
○ YES
◉ NO

1 EA $1,050 **$1,050**

○ Staff Only

Priority 2
Severity 3

No companion seat. Verify.

976

- *As-Built Description:*

Proper amount of seating for disabled persons at public seating is not provided (>25=1; >50=2; >300=4; >500=6; +500=6=1%).

- *Proposed Solution:*

Modify seating to provide clear and level wheelchair space 33" x 48" or 33" x 60", including companion seat, as required.

- ***Notes:***

PCODE **GE01NT**
ADAAG 91 **4.1.2(19)a**
ADA 2010 **221.2.1**
CBC 2007 **1104B.3.4.1**
CBC 2019 **11B-221.2.1**

Mitigated:
○ YES
◉ NO

1 EA $1,800 **$1,800**

○ Staff Only

Priority 2
Severity 3

No integral wheelchair seating. Verify.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

978

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Service counter: 6.0" at 32.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

6 LF $300 **$1,800**

○ Staff Only

Priority 2
Severity 3

Signage

1010

- *As-Built Description:*

At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT ROUTE" sign at door.

PCODE **SA10D**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Recreation Room

Non-Fixed Desk

982

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **24 seats, 0 accessible provided**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

2 JOB $4,800 **$9,600**

○ Staff Only

Priority 2
Severity 2

Protrusion Limits

981

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **foosball table: 32.0” at 16.0” high**
- *Proposed Solution:*

Drape cloth over handles to floor when not in use.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 1

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
980	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Service counter: 6.0” at 31.5” high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	7	LF	$300	**$2,100**

○ Staff Only

Priority 2

Severity 3

983	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Pool table: 9.0” at 30.0” high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	24	LF	$300	**$7,200**

○ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1017

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **Not adjacent**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

1018

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **Wrong side**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom

Accessible Compartment

986

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **4.5" and not opposite**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig.**
ADA 2010 **30(a)**
604.8.1.2
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Accessories

988

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **3.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

987

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Protrusion Limits

984

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryers: 7.0" at 41.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new dryer with depth less than 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 3

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1005

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

- ***Notes:***

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 3

Not adjacent to door. Exit Sign is blocked when restroom doors is held open.

990

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **7.6" to door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
989	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **No beveled or radiused. 60.4" high** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

985	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **59.75"** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Women's Restroom

Accessible Compartment

994

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **Not opposite**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig.**
ADA 2010 **30(a)**
604.8.1.2
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 2

Accessories

995

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **2.0" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 2

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

998

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). Unit in good condition.

- *As-Built:* **26.3" knee high**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA02A**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 3
Severity 2

Grab Bars

996

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

993

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryer: 7.0" at 41.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new hand dryer with depth less than 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 3

Signage

991

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **7.5" to door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
992	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Stall Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
997	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Crafts

Door Swing

1002

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **9.0" deep alcove at window sill**
- *Proposed Solution:*

Trim sill.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 4

Non-Fixed Desk

1001

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **40 seats, 0 accessible provided**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 2

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1000

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **31.0" to handles**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

Signage

1003

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **Wrong side**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 3

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
999	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.0" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Conference

Door Swing

1013

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 2

1014

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1011

- *As-Built Description:*

At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT ROUTE" sign at door.

PCODE **SA10D**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 2
Severity 3

1012

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Teen Lounge

Protrusion Limits

1016

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **TV: 6.0” at 71.0” high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

12 LF $300 **$3,600**

○ Staff Only

Priority 1
Severity 3

Signage

1015

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **61.0” to bottom of the highest tactile characters**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Men's Single User Restroom

Accessories

1025

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **3.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Coat Hook

1029

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **65.0" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 2

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1028

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Women's Single User Restroom

Accessories

1026

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **2.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Coat Hook

1027

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **69.0" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1023

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **14.75”**
- *Proposed Solution:*

Change door swing.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Grab Bars

1024

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0” on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1019

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **Clear floor space not center**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**

ADA 2010 **703.4.2**

CBC 2019 **11B-703.4.2**

Mitigated:

○ YES

◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3

Severity 3

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

1022

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**

CBC 2007 **1115B.6**

CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES

◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Hall and Reception

Brochure Bins

1032

- *As-Built Description:*

Information brochure bins mounted above accessible height of 48".

- *As-Built:* **68.0" high**
- *Proposed Solution:*

Relocate/remount bins at accessible height.

PCODE **IN08**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

Protrusion Limits

1030

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED: 7.0" at 49.5" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Reach Range					
1031	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **55.5" high** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Break

Non-Fixed Desk

1033

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **8 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2

Severity 2

Facility: **John Wells Youth Center** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Foyer

Height

1045

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **43.5" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

- ***Notes:***

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:

○ YES
◉ NO

2 LF $2,400 **$4,800**

○ Staff Only

Priority 1

Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012.

Conceptual Costs for **Floor:** First Floor **$68,895.00**

Facility: **John Wells Youth Center** Part: **Interior** Floor: **Second Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Office Doors

Door Swing

1034

- *As-Built Description:*

Latch approach: At push side, door does not have clear and level maneuvering space measuring door width plus 24" (starting at hinge) x 42", or 48" if door has closer.

- *As-Built:* **40.0" to 41.0"**
- *Proposed Solution:*

Relocate counter.

PCODE **ID28**
ADAAG 91 **Fig. 25(c)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(c)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Conference

Door Swing

1035

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom

Accessories

1038

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **2.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Grab Bars

1039

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1036

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **Wrong side. Clear floor space not center.**
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 3

1037

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled or radiused.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Women's Restroom

Accessories

1042

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **1.0" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 2

Coat Hook

1044

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **68.0" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1043

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Signage

1040

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **8.5" from wall**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Facility: **John Wells Youth Center** Part: **Interior** Floor: **Second Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1041	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Conceptual Costs for **Floor:** Second Floor **$3,780.00**

Facility: **John Wells Youth Center** Part: **Interior** Floor: **All**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Assistive Listening

1021

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) &**
ADA 2010 **4.33.7**
219.1 & 706.1
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 2
Severity 3

Door

1009

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **44.5" to 46.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

30 JOB $3,000 **$90,000**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

1046

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.0 seconds**
  17.0 lbs
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 2

Electrical

1008

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **48.5" to top of switch**
  50.0" to top of box
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

30 JOB $900 **$27,000**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **John Wells Youth Center** Part: **Interior** Floor: **All**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1006

- *As-Built Description:*

Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters.

- *As-Built:* **60.0" to center**
  60.0" to bottom of characters
- *Proposed Solution:*

Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.

PCODE **SA07**
ADAAG 91 **4.30.6**
ADA 2010 **703.4.1**
CBC 2007 **1117B.5.7**
CBC 2019 **11B-703.4.1**

Mitigated:
○ YES
◉ NO

20 JOB $150 **$3,000**

○ Staff Only

Priority 2
Severity 3

1004

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **Less than 9.0" to center of sign from door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Facility: **John Wells Youth Center** Part: **Interior** Floor: **All**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1007	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage. • ***Notes:***	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	20	JOB	$450	**$9,000**

○ Staff Only

Priority 2

Severity 3

Braille dots touch and/or almost touch, Braille is <3/8" from characters, characters <1/16" spacing. Throughout.

Conceptual Costs for **Floor:** All **$129,900.00**

Facility: **John Wells Youth Center** Part: **Interior** Floor: **All**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$202,575.00**

Facility: **John Wells Youth Center** Part: **Interior** Floor: **All**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** John Wells Youth Center					**$214,587.00**

Access Compliance Survey Report

Centennial Park

701 E. 5th Street

Facility #: 126A

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Playground

General Note

1056

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

CBC 2019 **11B-240.2.1**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

0

Where two or more required types of play components are provided, they shall be dispersed throughout the play area and integrated with other play component. Provide accessible play components that are not segregated with other play component.

Handrail

1053

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

- ***Notes:***

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

30 LF $360 **$10,800**

○ Staff Only

Priority 1

Severity 2

No 42.0” guard x 30.0’.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Height

1050

- *As-Built Description:*

Handrail gripping surface top not mounted between 20" minimum and 28" maximum above ramp surface within play areas.

- *Proposed Solution:*

Provide new compliant handrail.

- ***Notes:***

PCODE **ED02NT**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:
○ YES
◉ NO

40 LF $150 **$6,000**

○ Staff Only

Priority 1
Severity 2

This ramp connects the ground level components with the raised ones. Handrails connecting ground level play components 36.0” AFF.

Play Structure

1048

- *As-Built Description:*

Height of transfer platform is more than 18" or less than 11" above the accessible surface.

- *Proposed Solution:*

Adjust ground or platform height.

- ***Notes:***

PCODE **OC01D**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.3.1.2
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.3.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1
Severity 4

Transfer platform 5.0” high

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Slope

1051

• *As-Built Description:*

The rise for any ramp run connecting elevated play component shall be 12" maximum.

• *Proposed Solution:*

Demolish existing and provide new compliant ramp with handrails.

• ***Notes:***

PCODE **EB02NT**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-1008.2.5**

Mitigated:

○ YES
◉ NO

200 SF $300 **$60,000**

○ Staff Only

Priority 1

Severity 4

Code calls for 1:16 slope on ramps connecting ground level play components. This ramp does connect elevated play components to ground level components. This ramp slopes 1:12. Verify original design intent.

1052

• *As-Built Description:*

The rise for any ramp run connecting elevated play component shall be 12" maximum.

• *Proposed Solution:*

Provide new compliant ramp with handrails.

• ***Notes:***

PCODE **EB02NT**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-405.2**

Mitigated:

○ YES
◉ NO

80 SF $300 **$24,000**

○ Staff Only

Priority 1

Severity 4

Ramps connecting elevated play components slopes 1:13 X 20.0'.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stairways					
1055	• *As-Built Description:* Landing at the top or bottom of stairway is not level or not provided. • *Proposed Solution:* Remodel landings to provide a level clear floor space that extends the entire width of the ramp.	*PCODE* **EC10** *CBC 2019* **1009.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

	Surfacing					
1047	• *As-Built Description:* **Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951** • *Proposed Solution:* **Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.**	*PCODE* **OA01** *ADAAG 91* **36 CFR Part** *ADA 2010* **1191** **1008.2.6** *CBC 2007* **DSA 99-02** *CBC 2019* **11B-1008.2.6** **Mitigated:** ○ YES ◉ NO	1000	SF	$27	**$27,000**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

1049

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

20 LF $27 **$540**

○ Staff Only

Priority 1
Severity 4

1054

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

40 LF $27 **$1,080**

○ Staff Only

Priority 1
Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 West Lawn

Curb Ramp

1070

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:

○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$141,420.00**

Facility: **Centennial Park** Part: **Exterior** Floor: **On-site**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$141,420.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Restroom South

Accessories

1060

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 45.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

1061

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **4.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1062

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **SCD: 2.0" above grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Lavatory

1058

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.5" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1059

• *As-Built Description:*

Lavatory: Self-closing faucet at accessible lavatory does not remain open for at least 10 seconds.

• *Proposed Solution:*

Adjust self-closing faucet at accessible lavatory.

PCODE **WD07**
ADAAG 91 **4.19.5**
ADA 2010 **606.4**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3

Severity 3

Signage

1057

• *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

• *As-Built:* **Not beveled**

• *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Restroom North

Accessories

1065

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 44.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

1067

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **4.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Clear Floor Space

1068

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *As-Built:* **2.5%**
- *Proposed Solution:*

Modify surface and/or adjust drain.

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 SF

○ Staff Only

Priority 3
Severity 4

Drinking Fountain

1069

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1066

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **SCD: 2.0" above grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Signage

1063

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1064	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **18.125" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall. • ***Notes:***	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

Conceptual Costs for **Floor:** First Floor **$7,890.00**

Facility: **Centennial Park** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$7,890.00**

Facility: **Centennial Park** Part: **Interior** Floor: **First Floor**

Address: **701 E. 5th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Centennial Park					**$149,310.00**

Access Compliance Survey Report

Lions Town & Country Park

2300 Howard Road

Facility #: 133

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Accessible Route

1423

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Grade portions of unimproved trails along the water. Modify surface to be stable and firm.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

1000 LF $135 **$135,000**

○ Staff Only

Priority 1
Severity 3

Unimproved paths along the water have level changes and cross slopes over 2.1%.

1421

- *As-Built Description:*

(CA requirement only) Abrupt changes in level, except between a walk or sidewalk and an adjacent street or driveway, exceeding 4" in depth must be identified by a 6" min. curb above the potential drop off.

- *Proposed Solution:*

Provide a 6" curb as a warning curb for the blind or a handrail centered +/- 3" above finished surface.

- ***Notes:***

PCODE **EG08**
CBC 2007 **1133B.8.1**
CBC 2019 **11B-303.5**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 1
Severity 1

No barrier where the walk drops 4.0” to adjacent surface. Occurs at these bridges throughout.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Changes in Level

1694

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 4.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

40 LF $63 **$2,520**

○ Staff Only

Priority 1
Severity 2

Occurs throughout site where drives and or curb ramps meet unimproved walks.

Disabled Seating

1584

- *As-Built Description:*

Aisle transfer seats not provided (1% of total fixed seats, but not less than 1).

- *Proposed Solution:*

Provide aisle transfer seats without armrests on the aisle side, or removable or folding armrests on the aisle seat. Include sign or marker identifying such seats. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat).

- ***Notes:***

PCODE **GB01ENT**
ADAAG 91 **4.1.3(19)(a)**
ADA 2010 **802.4**
CBC 2007 **1104B.3.8**
CBC 2019 **11B-802.4**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 1
Severity 3

No ISA at designated aisle seats.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Fixed Seating

1583

- *As-Built Description:*

Proper amount of seating for disabled persons at public seating is not provided (>25=1; >50=2; >300=4; >500=6; +500=6=1%).

- *Proposed Solution:*

Modify seating to provide clear and level wheelchair space 33" x 48" or 33" x 60", including companion seat, as required.

- ***Notes:***

PCODE **GE01NT**
ADAAG 91 **4.1.2(19)a**
ADA 2010 **221.2.1**
CBC 2007 **1104B.3.4.1**
CBC 2019 **11B-221.2.1**

Mitigated:
○ YES
◉ NO

1 EA $1,800 **$1,800**

○ Staff Only

Priority 2
Severity 3

Seating at Bleachers is not inclusive. It's segregated at the sides.

Floor or Ground Surface

1695

- *As-Built Description:*

Walk: openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **5.0" x 3.0" deep**
- *Proposed Solution:*

Fill gap/opening along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

10 SF $240 **$2,400**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrail

1404

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

- ***Notes:***

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

60 LF $360 **$21,600**

○ Staff Only

Priority 1

Severity 2

No guards. Signage at some of these appears to suggest they don't want anyone using them. Other barriers on these bridges are 1" level changes , large gaps and 53.0% slopes.

7

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *As-Built:* **41" high**
- *Proposed Solution:*

Provide new guards, including warning curbs or guide rails at bridge.

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

40 LF $360 **$14,400**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1422

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

Guards protrude 41.0" throughout.

1554

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

50 JOB $300 **$15,000**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Vertical Clearance

1581

- *As-Built Description:*

Overhead clearance less than 80" above finished floor.

- *As-Built:* **Bleachers throughout protrude approximately 18.0” between 27.0” and 80.0” high.**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG01A**
ADAAG 91 **4.4.2**
ADA 2010 **307.4**
CBC 2007 **1133B.8.6.2**
CBC 2019 **11B-307.4**

Mitigated:

○ YES
◉ NO

200 LF $300 **$60,000**

○ Staff Only

Priority 1

Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Routes and Elements Near Amphitheater

Accessible Route

1396

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

40 LF $135 **$5,400**

○ Staff Only

Priority 1
Severity 3

No accessible route to edge of volleyball court.

1401

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

100 LF $135 **$13,500**

○ Staff Only

Priority 1
Severity 3

Unimproved path has 6.0% cross slopes.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1402	• *As-Built Description:* No walk / sidewalk provided to connect accessible facilities or elements that are on the same site. • *Proposed Solution:* Grade and re sod path to horse shoe pits. • ***Notes:***	*PCODE* **EF13** *ADAAG 91* **4.3.2** *ADA 2010* **206.1** *CBC 2007* **1114B.1.2** *CBC 2019* **11B-206.1** **Mitigated:** ○ YES ◉ NO	40	LF	$135	**$5,400**

○ Staff Only

Priority 1

Severity 3

3.0% cross slopes.

Changes in Level

1398	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **Up to 1.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	40	LF	$63	**$2,520**

○ Staff Only

Priority 1

Severity 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1400	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **up to 2.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	60	SF	$63	**$3,780**

○ Staff Only

Priority 1

Severity 3

Cross Slope

1418	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 3.5%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	100	SF	$75	**$7,500**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Desk

1403

- *As-Built Description:*

Accessible fixed B.B.Q. grill (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **35" high**
- *Proposed Solution:*

Provide new fixed accessible B.B.Q. grill.

PCODE **IN02**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1 & 902.3**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1
Severity 4

Non-Fixed Desk

1399

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **50 seats, 0 accessible provided at picnic areas 1 & 2.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
1397	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **6.4%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	40	SF	$75	**$3,000**
1405	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **Up to 7.3%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	100	SF	$75	**$7,500**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Accessible Parking at Amphitheater

Changes in Level

1420

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

1 SF $63 **$63**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

1414

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

15.0% flares. Gutter lip. Domes.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1407	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **1.0”** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**
1415	• *As-Built Description:* Side slopes more than 1:10 (10%). • *As-Built:* **15.0%** • *Proposed Solution:* Modify curb ramp. Demolish side slopes and replace with 1:10 side slopes if 48" level top landing is provided. • ***Notes:*** **There is a 48.0” level top landing.**	*PCODE* **EH05A** *ADAAG 91* **4.7.5** *ADA 2010* **406.3** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1406	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$750	**$3,000**

○ Staff Only

Priority 1

Severity 3

Floor or Ground Surfaces

1411	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **2.9%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	30	SF	$36	**$1,080**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1417	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 3.3%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	50	SF	$36	**$1,800**

○ Staff Only

Priority 1

Severity 4

Parking

1416	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1410	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**
1412	• *As-Built Description:* Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Provide wheel stops to prevent encroachment. • ***Notes:*** **Top landing running slope 2.9%.**	*PCODE* **EA04L** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$225	**$900**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1408	• *As-Built Description:* Sign relating to parking privileges for disabled persons is non-compliant. • *Proposed Solution:* Provide compliant parking signage that does not contain the word "Handicapped".	*PCODE* **EA04F** *ADA 2010* **502.6** *CBC 2007* **VC §22511.9.** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**
		 ○ Staff Only ***Priority*** **1** ***Severity*** **4**				
1409	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**
		 ○ Staff Only ***Priority*** **1** ***Severity*** **3**				

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
1419	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **6.5%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	40	SF	$75	**$3,000**
1413	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **32.0" wide** • *Proposed Solution:* Enlarge width of walk to 48". • ***Notes:***	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	10	SF	$135	**$1,350**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 2

Between curb ramp slope and pole.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Frisbee Golf

General Note

1424

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

Severity 3

The clear floor space at the hole slopes 5.3%

1425

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

Severity 3

The routes that connect the holes have cross slopes steeper than 2.1% and slopes steeper than 5.0%. Like regular golf, the challenges posed by natural terrain may be considered inherent and desired. However golf carts are typically used to alleviate travel difficulties on golf courses but not frisbee golf courses. Consider grading and re sodding or other natural, firm surface to provide compliant and natural routes between holes, where possible.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Granada Parking, Playground, and Exterior Routes

Changes in Level

1555

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 3.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

60 LF $63 **$3,780**

○ Staff Only

Priority 1
Severity 2

Occurs at joints and upheavals.

Cross Slope

1550

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.2%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

1000 SF $75 **$75,000**

○ Staff Only

Priority 1
Severity 3

Occurs throughout walks and sidewalks.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

1549

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **Up to 10.1%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

2 JOB $7,500 **$15,000**

○ Staff Only

Priority 1
Severity 4

1553

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **0.5"**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1543	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **Up to 9.1%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	4	JOB	$3,750	**$15,000**
1541	• *As-Built Description:* Cross slope greater than 2%. • *As-Built:* **Up to 3.8%** • *Proposed Solution:* Demolish existing and provide new curb ramp. • ***Notes:***	*PCODE* **EH02F** *ADAAG 91* **4.8.6** *ADA 2010* **405.3** *CBC 2007* **1133B.5.3.1** *CBC 2019* **11B-406.5.7** **Mitigated:** ○ YES ◉ NO	4	JOB	$7,500	**$30,000**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Landing at parallel curb ramp also slopes 3.3%. Gutter lip 0.7".

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1551	• *As-Built Description:* Cross slope greater than 2%. • *As-Built:* **2.8%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02F** *ADAAG 91* **4.8.6** *ADA 2010* **405.3** *CBC 2007* **1133B.5.3.1** *CBC 2019* **11B-406.5.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 4

1542	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$750	**$3,000**

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1552	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Drinking Fountain

1561	• *As-Built Description:* Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping. • *Proposed Solution:* Provide additional fountain or hi-lo combination fountain.	*PCODE* **IA01A** *ADAAG 91* **4.1.3(10)(a)** *ADA 2010* **211.1** *CBC 2007* **1115B.4.6.1** *CBC 2019* **11B-211.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1562	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 1

Severity 3

Floor or Ground Surfaces

1537	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 2.7%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	300	SF	$36	**$10,800**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrail

1565

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

- ***Notes:***

PCODE **ED08NT**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:

○ YES

◉ NO

10 LF $360 **$3,600**

○ Staff Only

Priority 1

Severity 2

No 42.0" guards.

Identification

1536

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

- ***Notes:***

PCODE **EA04B**

ADAAG 91 **4.6.4**

ADA 2010 **502.6**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.6**

Mitigated:

○ YES

◉ NO

4 JOB $945 **$3,780**

○ Staff Only

Priority 1

Severity 4

Van sign required at van accessible parking

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

1548

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **107.5" wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

1540

- *As-Built Description:*

Accessible parking space does not have 5' wide access aisle; 8' wide for van accessible aisle.

- *As-Built:* **95.25" wide**
- *Proposed Solution:*

Modify parking aisle(s) to create accessible space by restriping.

PCODE **EA02B**
ADAAG 91 **4.6.3**
ADA 2010 **502.3**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2; 11B-502.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1539	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *As-Built:* **9.0"** • *Proposed Solution:* Provide the words "NO PARKING" in each access aisle, painted in 12" high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**
1538	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1544	• *As-Built Description:* Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Provide wheel stops to prevent encroachment.	*PCODE* **EA04L** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	40	JOB	$225	**$9,000**

○ Staff Only

Priority 1

Severity 4

Parking Signage

1547	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**

○ Staff Only

Priority 1

Severity 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1546	• *As-Built Description:* Sign relating to parking privileges for disabled persons is non-compliant. • *Proposed Solution:* Provide compliant parking signage that does not contain the word "Handicapped".	*PCODE* **EA04F** *ADA 2010* **502.6** *CBC 2007* **VC §22511.9.** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

1545	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating “Minimum Fine $250” not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Surfacing

1563

- *As-Built Description:*

Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951

- *Proposed Solution:*

Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.

- ***Notes:***

Shredded tires.

PCODE **OA01**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.2.6
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.2.6**

Mitigated:
○ YES
◉ NO

1000 SF $27 **$27,000**

○ Staff Only

Priority 1
Severity 4

Tread Surface

1564

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

24 LF $27 **$648**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Ball Field 1 and 2 Including Parking and Exterior Routes

Changes in Level

1575

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 3.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 LF $63 **$504**

○ Staff Only

Priority 1
Severity 2

All dugouts.

Coat Hook

1574

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **73.0” high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

4 JOB $150 **$600**

○ Staff Only

Priority 1
Severity 1

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

1582

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 7.3%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

500 SF $75 **$37,500**

○ Staff Only

Priority 1
Severity 2

The accessible routes to Fields 1 and 2 and the appurtenant restrooms and elements has 7.0% slopes, cross slopes and 3.0" level changes and/or is circuitous.

Door

1576

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

4 JOB $300 **$1,200**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

1572

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

- ***Notes:***

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:

○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1

Severity 4

Van sign.

Parking

1569

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **106.5" wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:

○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1

Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1566	• *As-Built Description:* Parking sign is not located between 60" and 80" above the finish floor or ground surface measured to the bottom of the sign. • *As-Built:* **54.0" high** • *Proposed Solution:* Remount existing sign at accessible height.	*PCODE* **EA04H** *ADAAG 91* **4.6.4** *ADA 2010* **502.7** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$135	**$270**

○ Staff Only

Priority 1

Severity 4

1570	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1568	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**
1567	• *As-Built Description:* Sign relating to parking privileges for disabled persons is non-compliant. • *Proposed Solution:* Provide compliant parking signage that does not contain the word "Handicapped".	*PCODE* **EA04F** *ADA 2010* **502.6** *CBC 2007* **VC §22511.9.** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1571	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

Participation Area

1573	• *As-Built Description:* An accessible path of travel is not provided to and from all participation and activity areas, including athletic team rooms/facilities, playing fields/running tracks, baseball/softball player dugouts and sanitary/locker facilities (home and guest). • *Proposed Solution:* Provide an accessible path of travel to all participation areas. • ***Notes:***	*PCODE* **GF07ANT** *ADAAG 91* **4.1.1 (1)** *CBC 2007* **1104B.4.3** *CBC 2019* **11B-206.2.18** **Mitigated:** ○ YES ◉ NO	4	JOB	$15,000	**$60,000**

○ Staff Only

Priority 1

Severity 2

Wheelchair space at dugouts blocks circulation path. Enlarge all dugouts.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1577

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Shelf: 5.0" to 9.0" at 53.0" to 64.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

The shelves are also in the door maneuvering clearance.

1579

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **6.0" at 56.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

The object is in the door maneuvering clearance under the score booth.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1578

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **64.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

All dugouts.

Vertical Clearance

1580

- *As-Built Description:*

Overhead clearance less than 80" above finished floor.

- *As-Built:* **39.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG01A**
ADAAG 91 **4.4.2**
ADA 2010 **307.4**
CBC 2007 **1133B.8.6.2**
CBC 2019 **11B-307.4**

Mitigated:
○ YES
◉ NO

16 LF $300 **$4,800**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

1588

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

50 LF $81 **$4,050**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Parking and Exterior Route from Howard at Ball Field 2

Curb Ramp

1592

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.1%**
- *Proposed Solution:*

Grind surface.

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

1594

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.6%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1585	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **5.4%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**
						 ○ Staff Only ***Priority*** 1 ***Severity*** 4
1591	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **7.5%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**
						 ○ Staff Only ***Priority*** 1 ***Severity*** 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1587	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**
1595	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1586	• *As-Built Description:* Curb ramp or 48" level space at bottom of ramp not provided. • *Proposed Solution:* Modify bottom landing to have slope in all direction 1:48 maximum. • ***Notes:***	*PCODE* **EH09NT** *ADAAG 91* **4.7.9 + 10** *ADA 2010* **406.5** *CBC 2007* **1127B.5.9** *CBC 2019* **11B-406.3.2** **Mitigated:** ○ YES ◉ NO	25	LF	$60	**$1,500**

○ Staff Only

Priority 1

Severity 1

Bottom landing slopes 7.2% running, outside of gutter.

Detectable Warning

1589	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	20	LF	$81	**$1,620**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

1590

• *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

• *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

• ***Notes:***

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:

○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1

Severity 3

Multiple compliance issues at van space including 10.0% slope.

1593

• *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

• *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

• ***Notes:***

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:

○ YES
◉ NO

2 JOB $6,000 **$12,000**

○ Staff Only

Priority 1

Severity 3

Multiple compliance issues including slopes up to 7.2% and signage at 50.0" AFF that does not include fine signs.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
1596	• *As-Built Description:* Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Provide wheel stops to prevent encroachment.	*PCODE* **EA04L** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	5	JOB	$225	**$1,125**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Hexagon, Field 7, Routes and Parking

Changes in Level

1630

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0" at dugouts.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

6 SF $63 **$378**

○ Staff Only

Priority 1
Severity 4

1675

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 SF $63 **$1,260**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
1629	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.8% at tray slide.** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	45	SF	$75	**$3,375**

○ Staff Only

Priority 1

Severity 4

1674	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 5.2%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	1500	SF	$75	**$112,500**

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

1669

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **0.3"**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Drinking Fountain

1631

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

- ***Notes:***

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

2 JOB $6,000 **$12,000**

○ Staff Only

Priority 1
Severity 2

1 in each dugout. There is a fountain at the restrooms.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1625	• *As-Built Description:* 30" wide x 48" long clear floor space not provided at drinking fountain. • *As-Built:* **Not centered** • *Proposed Solution:* Provide clear floor space at drinking fountain. Relocate railings. • ***Notes:***	*PCODE* **IA06** *ADAAG 91* **4.15.5(1)*** *ADA 2010* **602.2** *CBC 2007* **1115B.4.6.2** *CBC 2019* **11B-602.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 1

Severity 3

Complies with Safe Harbor and/or CBC if altered or constructed before January 2008.

Floor or Ground Surfaces

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1670	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 4.8%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	30	SF	$36	**$1,080**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

1626

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **40 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 1
Severity 2

Parking

1671

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 140.0” long reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1672	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

1673	• *As-Built Description:* Cross hatching within access aisle is not provided or incorrect. • *Proposed Solution:* Provide cross hatching that is 36" maximum on center and contrasting to the surface of the access aisle. • ***Notes:***	*PCODE* **EA04I** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 3

Striping not diagonal white.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

1676

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

2 JOB $975 **$1,950**

○ Staff Only

Priority 1

Severity 4

Protrusion Limits

1628

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Counter: 8.5” at 33” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**

ADAAG 91 **4.4.1**

ADA 2010 **307.2**

CBC 2007 **1133B.8.6.1**

CBC 2019 **11B-307.2**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tray Pass-thru

1627

- *As-Built Description:*

Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor.

- *As-Built:* **Tray slide 37.0" high x 15.0'.**
- *Proposed Solution:*

Remodel pass-thru and counter to be 34" max. above floor.

PCODE **FB04**
ADAAG 91 **5.2**
ADA 2010 **902.3**
CBC 2007 **1122B.4**
CBC 2019 **11B-902.3**

Mitigated:

○ YES
◉ NO

12 JOB $9,900 **$118,800**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Baseball Field

Accessible Route

1632

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

200 LF $135 **$27,000**

○ Staff Only

Priority 1
Severity 3

The unimproved routes to the bleachers and dugouts has 16.0% slopes.

Disabled Seating

1633

- *As-Built Description:*

Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat).

- *Proposed Solution:*

Provide wheelchair space plus necessary maneuvering clearance. Relocate bleacher as needed.

- ***Notes:***

PCODE **GB01A**
ADAAG 91 **4.1.3(19)(a)**
ADA 2010 **221.2**
CBC 2007 **1104B.3.6**
CBC 2019 **11B-221.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,350 **$1,350**

○ Staff Only

Priority 1
Severity 3

Gaps and 7.0% slopes at potential wheelchair space adjacent to bleachers. Level space obstructs circulation path and is not lined with companion seat.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1634	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *Proposed Solution:* Remove fixed seating and provide wheelchair space plus necessary maneuvering clearance. Enlarge dugouts as needed. • ***Notes:*** **In dugouts.**	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 3

Protrusion Limits

1635	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **73.0" headroom in dugouts.** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$6,000	**$12,000**

○ Staff Only

Priority 1

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Field 9, Parking and Route

Changes in Level

1641

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.7 not beveled**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

16 SF $63 **$1,008**

○ Staff Only

Priority 1
Severity 4

Cross Slope

1640

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 5.6%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

40 SF $75 **$3,000**

○ Staff Only

Priority 1
Severity 3

At both sides of curb ramp at the top.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1655	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **4.4%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	500	SF	$75	**$37,500**

○ Staff Only

Priority 1

Severity 3

Curb Ramp

1653	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **1.0"** • *Proposed Solution:* Grind lip. • ***Notes:***	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 2

Consider whether this and others like it are intended for pedestrian traffic

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1654	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp. • ***Notes:***	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Consider whether this and others like it are intended for pedestrian traffic. Certainly there are no domes where pedestrians meet traffic.

Disabled Seating

1642	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *As-Built:* **Seating is within circulation path.** • *Proposed Solution:* Relocate bleacher and provide wheelchair space plus necessary maneuvering clearance.	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,350	**$1,350**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

1643

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

2 JOB $6,000 **$12,000**

○ Staff Only

Priority 1
Severity 2

1644

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surfaces

1652

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 4.3%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

200 SF $36 **$7,200**

○ Staff Only

Priority 1
Severity 3

Parking

1636

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Diagonal spaces approximately 108.0" to 120.0" long, reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

4 JOB $600 **$2,400**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1639	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **96.5" wide** • *Proposed Solution:* Modify parking space(s) to create accessible space.	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**
1638	• *As-Built Description:* Cross hatching within access aisle is not provided or incorrect. • *Proposed Solution:* Provide cross hatching that is 36" maximum on center and contrasting to the surface of the access aisle. • ***Notes:*** **Lines are not diagonal.**	*PCODE* **EA04I** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1637	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 3

Parking Signage

1678	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$975	**$3,900**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Field 8, Parking on W Industrial and Routes

Changes in Level

1656

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 0.7”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 SF $63 **$1,260**

○ Staff Only

Priority 1
Severity 4

1659

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

1651

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.6%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

60 SF $75 **$4,500**

○ Staff Only

Priority 1
Severity 3

Disabled Seating

1657

- *As-Built Description:*

Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat).

- *As-Built:* **Within circulation path.**
- *Proposed Solution:*

Relocate bleacher and provide wheelchair space plus necessary maneuvering clearance.

PCODE **GB01A**
ADAAG 91 **4.1.3(19)(a)**
ADA 2010 **221.2**
CBC 2007 **1104B.3.6**
CBC 2019 **11B-221.2**

Mitigated:
○ YES
◉ NO

2 JOB $1,350 **$2,700**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

1645

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

2 JOB $6,000 **$12,000**

○ Staff Only

Priority 1

Severity 2

1646

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surfaces

1650

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 5.2%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

300 SF $36 **$10,800**

○ Staff Only

Priority 1
Severity 3

Parking

1647

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 86.0" to 104.0" long limited by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1649	• *As-Built Description:* Cross hatching within access aisle is not provided or incorrect. • *Proposed Solution:* Provide cross hatching that is 36" maximum on center and contrasting to the surface of the access aisle. • ***Notes:***	*PCODE* **EA04I** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

Not diagonal.

1648	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1677	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**

○ Staff Only

Priority 1

Severity 4

	Top & Bottom Extension at Stairs					
1660	• *As-Built Description:* Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing. • *Proposed Solution:* Extend stair handrail at top and bottom (cost for each extension piece).	*PCODE* **ED06** *ADAAG 91* **4.9.4(2)** *ADA 2010* **505.10.2; 505.10.3** *CBC 2007* **1133B.4.2.2** *CBC 2019* **11B-505.10.2; 11B-505.10.3** **Mitigated:** ○ YES ◉ NO	6	JOB	$510	**$3,060**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

1662

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**

ADA 2010 **504.4**

CBC 2007 **1133B.4.4**

CBC 2019 **11B-504.4.1**

Mitigated:

○ YES

◉ NO

24 LF $27 **$648**

○ Staff Only

Priority 1

Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:

1,,,

2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Treads and Risers

1661

- *As-Built Description:*

Steps do not have uniform riser height.

- *As-Built:* **5.0" to 5.7" high**
- *Proposed Solution:*

Remodel stairs as needed.

PCODE **EC07A**
ADA 2010 **504.2**
CBC 2007 **1133B.4.5.3**
CBC 2019 **11B-504.2**

Mitigated:
○ YES
◉ NO

20 LF $225 **$4,500**

○ Staff Only

Priority 1
Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Walk

1658

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **6.3%**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

40 SF $75 **$3,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Field 8, Parking on W Industrial and Schnoor

Curb Ramp

1667

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **1.0”**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

Detectable Warning Surface

1666

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Domes 9.0” from access aisle

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surfaces

1664

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **Up to 7.3%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

50 SF $36 **$1,800**

○ Staff Only

Priority 1
Severity 2

Parking

1663

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 120.0" to 145.0" reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1665	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**

○ Staff Only

Priority 1

Severity 4

	Ramp					
1668	• *As-Built Description:* Slope not steep but greater than 1:20 (5.0 %) without handrails. • *Proposed Solution:* Provide handrails for ramp.	*PCODE* **EB03** *ADAAG 91* **4.8.1** *ADA 2010* **405.1** *CBC 2007* **1133B.5.5.1** *CBC 2019* **11B-405.8** **Mitigated:** ○ YES ◉ NO	20	LF	$225	**$4,500**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Field 3, Parking and Route

Accessible Route

1688

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 1
Severity 3

Curb Ramp

1685

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **1.0”**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1686	• *As-Built Description:* Cross slope greater than 2%. • *As-Built:* **2.8%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02F** *ADAAG 91* **4.8.6** *ADA 2010* **405.3** *CBC 2007* **1133B.5.3.1** *CBC 2019* **11B-406.5.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**
1687	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1693	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp. • ***Notes:***	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

⊗ Staff Only

Priority 1

Severity 3

Verify if intended for pedestrian traffic.

Disabled Seating

1689	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *As-Built:* **Wheelchair space within circulation path.** • *Proposed Solution:* Relocate bleacher and provide wheelchair space plus necessary maneuvering clearance.	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,350	**$1,350**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1690	• *As-Built Description:* Wheelchair space (33"x48") not provided at fixed seating with forward or rear approach. (NOTE: Space must be adjacent to regular seating; can provide easily removable fixed seat). • *As-Built:* **Wheelchair space within circulation path.** • *Proposed Solution:* Remove fixed seating and provide wheelchair space plus necessary maneuvering clearance. Enlarge dugouts as needed. • ***Notes:*** **Both dugouts.**	*PCODE* **GB01A** *ADAAG 91* **4.1.3(19)(a)** *ADA 2010* **221.2** *CBC 2007* **1104B.3.6** *CBC 2019* **11B-221.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$6,000	**$12,000**

○ Staff Only

Priority 1

Severity 3

Door

1691	• *As-Built Description:* At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface. • *Proposed Solution:* Provide 10" min. "kick plate" covering width of door when altering area.	*PCODE* **ID06** *ADA 2010* **404.2.10** *CBC 2007* **1133B.2.6** *CBC 2019* **11B-404.2.10** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

⊗ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
1683	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 4.1%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	300	SF	$36	**$10,800**

○ Staff Only

Priority 1

Severity 3

	Identification					
1679	• *As-Built Description:* Sign for accessible parking space is missing or non-compliant. • *Proposed Solution:* Provide compliant parking signage.	*PCODE* **EA04B** *ADAAG 91* **4.6.4** *ADA 2010* **502.6** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$945	**$1,890**

○ Staff Only

Priority 1

Severity 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

1684

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **107.0" wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

1682

- *As-Built Description:*

The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only).

- *As-Built:* **8.0" high characters.**
- *Proposed Solution:*

Provide the words "NO PARKING" in each access aisle, painted in 12" high letters, when altering area.

PCODE **EA04D**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1681	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 1

Severity 3

Parking Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1680	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Vertical Clearance

1692

- *As-Built Description:*

Overhead clearance less than 80" above finished floor.

- *As-Built:* **27.0” to 59.0” high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG01A**
ADAAG 91 **4.4.2**
ADA 2010 **307.4**
CBC 2007 **1133B.8.6.2**
CBC 2019 **11B-307.4**

Mitigated:

○ YES
◉ NO

8 LF $300 **$2,400**

⊗ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Field 5, Parking and Route

Changes in Level

1698

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0" at dugouts.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

7 SF $63 **$441**

○ Staff Only

Priority 1
Severity 3

Cross Slope

1699

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.2%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

100 SF $75 **$7,500**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

1697

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **7.7%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Minimum Number

1696

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

14 Field 4, Parking and Route

Curb Ramp

1701

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:

○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1

Severity 3

Door

1702

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

- ***Notes:***

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:

○ YES
◉ NO

4 JOB $300 **$1,200**

○ Staff Only

Priority 1

Severity 3

In dugouts.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1703	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **8.0%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	50	SF	$120	**$6,000**

○ Staff Only

Priority 1

Severity 2

Door Threshold

1704	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **Up to 3.0"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max). • ***Notes:***	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	4	JOB	$1,200	**$4,800**

○ Staff Only

Priority 1

Severity 1

Dugouts.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

1700

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

Vertical Clearance

1705

- *As-Built Description:*

Overhead clearance less than 80" above finished floor.

- *As-Built:* **73.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance. Adjust roof top as needed.

- ***Notes:***

PCODE **EG01A**
ADAAG 91 **4.4.2**
ADA 2010 **307.4**
CBC 2007 **1133B.8.6.2**
CBC 2019 **11B-307.4**

Mitigated:
○ YES
◉ NO

50 LF $300 **$15,000**

○ Staff Only

Priority 1
Severity 2

Dugouts.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

15 Picnic Tables on Industrial

Accessible Route

2187

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk or firm surface.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

50 LF $135 **$6,750**

○ Staff Only

Priority 1
Severity 3

Cross Slope

2188

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

4 SF $75 **$300**

○ Staff Only

Priority 1
Severity 4

Choose a table with level cross slopes for an accessible table.

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
2189	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *Proposed Solution:* Enlarge width of walk to 48". • ***Notes:***	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	40	SF	$135	**$5,400**

○ Staff Only

Priority 1

Severity 4

16.0” accessible route at picnic tables. Extend concrete for a 48.0” path around the table so people have seating options.

Conceptual Costs for **Floor:** On-site **$1,264,752.00**

Facility: **Lions Town & Country Park** Part: **Exterior** Floor: **On-site**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$1,264,752.00**

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Women's and Men's Restroom Pavilion at Industrial and S Grenada Dr

Restroom

1372

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **68.5" x 111.5"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

2 JOB $90,000 **$180,000**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Public Kitchen Pavilion at Industrial and S Grenada Dr

Access Route

1559

- *As-Built Description:*

Access route less than 44" wide.

- *As-Built:* **Route between benches 30.0" wide.**
- *Proposed Solution:*

Enlarge access route to 44" wide; relocate picnic tables.

PCODE **IH03**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 4
Severity 4

Accessible Route

1560

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Changes in Level

1557

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 SF $63 **$504**

○ Staff Only

Priority 4
Severity 4

Some level changes occur in the clear floor space at seating.

Cross Slope

1556

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up up to 4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

300 SF $75 **$22,500**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1558

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4

Severity 2

Protrusion Limits

1373

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Service counter: 7.0” at 32.5” high**
- *Proposed Solution:*

Add cane detectable side panels.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Schnoor Maintenance Restrooms

Restroom

1374

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **96.0" x 72.0"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Schnoor Men's and Women's Restrooms

Cross Slope

1376

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.4%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.2**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 3
Severity 4

Drinking Fountain

1377

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1378	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Restroom

1375	• *As-Built Description:* Multiple accommodation restroom not accessible; multiple compliance violations. • *As-Built:* **140.0" x 112.0"** • *Proposed Solution:* Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).	*PCODE* **WA01A** *ADAAG 91* **4.22** *ADA 2010* **603.1** *CBC 2007* **1115B.3.1** *CBC 2019* **11B-603.1** **Mitigated:** ○ YES ◉ NO	2	JOB	?	**$210,000**

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Schnoor Snack Bar

Door Clearance

1383

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.3" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

⊗ Staff Only

Priority 2
Severity 4

Door Hardware

1381

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

3 JOB $450 **$1,350**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Stopper

1384

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

⊗ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Door Threshold

1382

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **3.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

⊗ Staff Only

Priority 2
Severity 1

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

1380

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **56.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 2
Severity 3

Tray Pass-thru

1379

- *As-Built Description:*

Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor.

- *As-Built:* **Tray Slide 40.0" high**
- *Proposed Solution:*

Remodel pass-thru and counter to be 34" max. above floor.

PCODE **FB04**
ADAAG 91 **5.2**
ADA 2010 **902.3**
CBC 2007 **1122B.4**
CBC 2019 **11B-902.3**

Mitigated:
○ YES
◉ NO

8 JOB $9,900 **$79,200**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Howard Snack Bar Between Ballfield 1 and 2

Door Threshold

1389

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

⊗ Staff Only

Priority 1
Severity 4

Electrical

1385

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **53.0” high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

⊗ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1388

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Light fixture: 10.0” at 72.5” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

Tray Pass-thru

1386

- *As-Built Description:*

Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor.

- *As-Built:* **42.0” high**
- *Proposed Solution:*

Remodel pass-thru and counter to be 34" max. above floor.

PCODE **FB04**
ADAAG 91 **5.2**
ADA 2010 **902.3**
CBC 2007 **1122B.4**
CBC 2019 **11B-902.3**

Mitigated:
○ YES
◉ NO

10 JOB $9,900 **$99,000**

○ Staff Only

Priority 2
Severity 3

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Vertical Clearance

1387

- *As-Built Description:*

Overhead clearance less than 80" above finished floor.

- *As-Built:* **76.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG01A**
ADAAG 91 **4.4.2**
ADA 2010 **307.4**
CBC 2007 **1133B.8.6.2**
CBC 2019 **11B-307.4**

Mitigated:

○ YES
◉ NO

8 LF $300 **$2,400**

○ Staff Only

Priority **2**

Severity **2**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Amphitheater

Accessible Route

1394

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

100 LF $135 **$13,500**

○ Staff Only

Priority 1
Severity 3

Consider an accessible route to the entire sloped viewing area in order to access dispersed seating on the grass.

Door

1391

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

⊗ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

1393

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 2
Severity 3

Door Threshold

1392

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **0.75”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

⊗ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1390	**Tray Pass-thru** • *As-Built Description:* Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor. • *As-Built:* **Tray slide 35.0" high** • *Proposed Solution:* Remodel pass-thru and counter to be 34" max. above floor.	*PCODE* **FB04** *ADAAG 91* **5.2** *ADA 2010* **902.3** *CBC 2007* **1122B.4** *CBC 2019* **11B-902.3** **Mitigated:** ○ YES ◉ NO	10	JOB	$9,900	**$99,000**

○ Staff Only

Priority 2

Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Amphitheater Men's and Women's Restrooms

Restroom

1395

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

- ***Notes:***

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

2 JOB $90,000 **$180,000**

○ Staff Only

Priority 3

Severity 2

These restrooms may be too small to be accessible according to current requirements. The widest wall is 56.0"

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Restrooms at Ball Fields 1 and 2

Restroom

1597

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **139.0" x 112.0"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

2 JOB ? **$210,000**

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Women's Restroom at Hexagon

Accessories

1606

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 44.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Door

1599

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify surface slope at door. Adjust floor drain as needed.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

20 SF $120 **$2,400**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2170	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.8%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**
1600	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **45.0" high** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1607

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 18.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

1601

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **TPD: 0.25" below grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1602	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
1603	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 5.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1609

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.8" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1610

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1598

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**

CBC 2007 **1115B.6**

CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES

◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1608

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **53.0" to lavatory**
- *Proposed Solution:*

Remove adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**

ADA 2010 **604.3.1; 604.3.2**

CBC 2007 **1115B.7.1.3**

CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:

○ YES

◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1604

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **20.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 3

1605

- *As-Built Description:*

Height of water closet seat less than 17" or more than 19" from floor.

- *As-Built:* **19.75" high**
- *Proposed Solution:*

Provide new accessible water closet.

PCODE **WB08**
ADAAG 91 **4.16.3**
ADA 2010 **604.4**
CBC 2007 **1115B.4.1.4**
CBC 2019 **11B-604.4**

Mitigated:
○ YES
◉ NO

1 JOB $4,200 **$4,200**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Men's Restroom at Hexagon

Accessories

1624

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 43.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

1623

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

1613

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.5%**
- *Proposed Solution:*

Modify cross slope and adjust drain as needed.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

10 SF $75 **$750**

○ Staff Only

Priority 3
Severity 4

Door

1615

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **45.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1614

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.5”**
- *Proposed Solution:*

Install lower profile trash can.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Grab Bars

1619

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **TPD: 1.0” below grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1620	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 4.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
1621	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 2.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
1622	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

	Signage					
1612	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *As-Built:* **Braille 0.75" from characters.** • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing). • ***Notes:***	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

There appear to be 2 lines of Braille.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1611	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1616	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **40.0" to lavatory** • *Proposed Solution:* Remove adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1617

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.2" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

- ***Notes:***

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

1618

- *As-Built Description:*

Height of water closet seat less than 17" or more than 19" from floor.

- *As-Built:* **19.7" high**
- *Proposed Solution:*

Provide new accessible water closet.

PCODE **WB08**
ADAAG 91 **4.16.3**
ADA 2010 **604.4**
CBC 2007 **1115B.4.1.4**
CBC 2019 **11B-604.4**

Mitigated:
○ YES
◉ NO

1 JOB $4,200 **$4,200**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Men's Restroom at Hexagon

Door

2145

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **45.0"**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Door Closer

2141

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.0 seconds.**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 3

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

2143

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.0”**
- *Proposed Solution:*

Install lower profile trash can.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Grab Bars

2149

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 21.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2150	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **PTD: 4.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
2151	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **PTD: 1.3" below grab bar** • *Proposed Solution:* Raise the grab bar.	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

2147

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.5" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

2148

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
2146	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **19.5”** • *Proposed Solution:* Lower accessible water closet.	*PCODE* **WB08** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Men's Restroom at Hexagon

Accessories

2140

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **43.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Door

2132

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.3%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 SF $120 **$120**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2130	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **51.0”** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	6	JOB	$900	**$5,400**

○ Staff Only

Priority 3

Severity 3

Occurs at each restroom at the hexagon.

2154	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **44.75”** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Closer

2142

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.0 second**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 2

Door Swing

2131

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.5" at 8.0" deep alcove**
- *Proposed Solution:*

Install ISA signage at accessible restrooms.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

2153

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 19.5” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

2135

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **PTD: 0.75” below grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2136	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **PTD: 3.5" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
2137	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

2139

• *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

• *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Signage

2129

• *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

• *As-Built:* **Braille 1.0" from characters. 2 lines of Braille**

• *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

• ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:

○ YES
◉ NO

6 JOB $270 **$1,620**

○ Staff Only

Priority 3

Severity 3

The same condition occurs at each restroom at the hexagon.

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2144	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign. • ***Notes:***	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	6	JOB	$270	**$1,620**

○ Staff Only

Priority 3

Severity 3

Occurs at all restrooms at the hexagon.

Toilet Stall

2138	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **53.5" to lavatory** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 1

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

2134

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.5"**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

2152

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.5"**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

- ***Notes:***

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2133	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

14 Women's Restroom at Hexagon

Accessories

2158

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **43.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

2165

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **48.5"**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 3

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Clear Floor Space

2157

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *As-Built:* **0.15" level change at WC**
- *Proposed Solution:*

Modify surface and/or adjust drain.

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Door

2168

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.5%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2156	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **45.0"** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Door Closer

2167	• *As-Built Description:* Excessive force required to open door. • *As-Built:* **1.0 second** • *Proposed Solution:* Adjust regular door closer to accessible standards (5 lbs. max).	*PCODE* **ID03** *ADAAG 91* **4.13.11** *ADA 2010* **404.2.9** *CBC 2007* **1133B.2.5** *CBC 2019* **11B-404.2.9** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

2155

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.0”**
- *Proposed Solution:*

Install lower profile trash can.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Grab Bars

2160

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **PTD: 0.5” below grab bar**
- *Proposed Solution:*

Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2161	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 4.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
2162	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

2166

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.0"**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

2159

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

2164

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **43.0" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Water Closet

2185

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **16.5"**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2186	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **20.0”** • *Proposed Solution:* Provide new accessible water closet.	*PCODE* **WB08** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,200	**$4,200**
2163	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

15 Women's Restroom at Hexagon

Accessories

2180

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **43.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Clear Floor Space

2172

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *Proposed Solution:*

Modify surface and/or adjust drain.

- ***Notes:***

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

3.1% slope at water closet.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

2169

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.2%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 3
Severity 4

Door Closer

2171

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.0 second**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

2173

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **17.0”**
- *Proposed Solution:*

Install lower profile trash can.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Grab Bars

2181

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 21.5” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2176	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 4.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
2177	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 0.75" below grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2178	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

2175	• *As-Built Description:* Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory). • *As-Built:* **17.0"** • *Proposed Solution:* Relocate existing lavatory. • ***Notes:***	*PCODE* **WD01A** *ADAAG 91* **4.19.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.2, 11B -606.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,700	**$2,700**

○ Staff Only

Priority 3

Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

2184

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.7" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:

○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3

Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

2183

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

2174

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **43.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Water Closet

2182

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **16.0"**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2179	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Conceptual Costs for **Floor:** First Floor **$1,348,164.00**

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$1,348,164.00**

Facility: **Lions Town & Country Park** Part: **Interior** Floor: **First Floor**

Address: **2300 Howard Road** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Lions Town & Country Park					**$2,612,916.00**

Access Compliance Survey Report

Community Development Offices

428 E. Yosemite Avenue

Facility #: 135

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 East Parking and Route to Lobby

Detectable Warning Surface

894

- *As-Built Description:*

The truncated domes do not have a height of 0.2".

- *Proposed Solution:*

Provide a detectable warning surface where the truncated domes have height of 0.2".

- ***Notes:***

PCODE **PW04**
ADA 2010 **705.1.1**
PROW **R305.1.1**
CBC 2019 **11B-705.1.1.1**

Mitigated:
○ YES
◉ NO

1 JOB $297 **$297**

○ Staff Only

Priority 1
Severity 1

0.25" level change on curb ramp.

893

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Domes 9.75" to gutter.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surfaces

891

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **5.5% at gutter**
- *Proposed Solution:*

Modify slope at accessible parking space or lengthen striping.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

40 SF $36 **$1,440**

○ Staff Only

Priority 1
Severity 3

Parking

892

- *As-Built Description:*

CA only: The area within the blue borderlines not marked with hatched lines a maximum of 36" on center.

- *Proposed Solution:*

Restripe to provide hatched lines at 36" on center within access aisle.

- ***Notes:***

PCODE **EA04I**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Striping faded - no contrast. Restripe

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Curb Ramp

Curb Ramp

896

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **0.25" and gap.**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Detectable Warning Surface

895

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Domes 3.0" from drive.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 A St Curb Ramp

Curb Ramp

898

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.0%**
- *Proposed Solution:*

Modify bottom slope. Coordinate with gutter slope alteration.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Slope occurs at bottom 9.0" of the curb ramp.

899

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **8.0%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning Surface

897

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Parallel curb ramp. Domes 9.5" from gutter.

Parking

900

- *As-Built Description:*

Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route.

- *Proposed Solution:*

Provide wheel stops to prevent encroachment.

PCODE **EA04L**
CBC 2019 **11B-502.7.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 North Parking and Route to Lobby on Yosemite

Curb Ramp

904

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **7.6%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Floor or Ground Surfaces

902

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **6.0% to 7.6% at gutters**
- *Proposed Solution:*

Modify slope at accessible parking space. Or restripe space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

30 SF $36 **$1,080**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
903	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **3.1%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	6	SF	$36	**$216**

○ Staff Only

Priority 1

Severity 4

Parking

901	• *As-Built Description:* CA only: The area within the blue borderlines not marked with hatched lines a maximum of 36" on center. • *Proposed Solution:* Restripe to provide hatched lines at 36" on center within access aisle. • ***Notes:***	*PCODE* **EA04I** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 3

Faded striping. Consider lengthening the space and aisle to remove the slopes at the gutter from the parking space.

Facility: **Community Development Offices** Part: **Exterior** Floor: **On-site**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
905	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	3	JOB	$975	**$2,925**

○ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** On-site **$26,583.00**

Facility: **Community Development Offices** Part: **Exterior** Floor: **On-site**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$26,583.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Door Closer

855

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.0 seconds**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

5 JOB $75 **$375**

○ Staff Only

Priority 2
Severity 3

General Note

859

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*

PCODE **GN01**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Lobby

Drinking Fountain

853

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). Unit in good condition.

- *As-Built:* **25.5" knee high 7.5" deep.**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA02A**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 1
Severity 2

852

- *As-Built Description:*

30" wide x 48" long clear floor space not provided at drinking fountain.

- *Proposed Solution:*

Provide clear floor space at drinking fountain.

PCODE **IA06**
ADAAG 91 **4.15.5(1)***
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,660 **$6,660**

○ Staff Only

Priority 1
Severity 3

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

850

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **41.0" high**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 3

Reach Range

851

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **41.0" high obstruction**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

854

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Where characters have rectangular cross sections, spacing between individual raised characters shall be 1/8" minimum and 4 times the raised character stoke width maximum.

- ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:

○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 1

Severity 3

Spacing 1/16” between characters.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Lobby Restroom

Accessories

863

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **9.75” in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Grab Bars

864

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.5” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

860

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.75”**
- *Proposed Solution:*

Trim apron.

- ***Notes:***

PCODE **WD03**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 2

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Protrusion Limits

861

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryer: 8.5” at 39” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new hand dryer with depth less than 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

856

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *As-Built:* **Height of the characters are too large for the width. Braille not below characters**
- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

857

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled or radiused.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

858

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **58.0" to lavatory counter**
- *Proposed Solution:*

Trim counter.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Water Closet

862

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **19.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Conference Room

Assistive Listening

866

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) & 4.33.7**
ADA 2010 **219.1 & 706.1**
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 2

Severity 3

Protrusion Limits

865

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **TV: 7.0" at 63.0" high**
- *Proposed Solution:*

Add cane detection.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2

Severity 3

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Signage					
867	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Breakroom

Cooktops

870

- *As-Built Description:*

Cooktop controls require reaching across the burners.

- *Proposed Solution:*

Provide cooktop with accessible controls.

PCODE **KF15**
ADAAG 91 **13.3.4(6)**
ADA 2010 **804.6.2**
CBC 2007 **1111B.5.1**
CBC 2019 **11B-804.6.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,950 **$1,950**

○ Staff Only

Priority 2
Severity 4

Non-Fixed Desk

869

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **8 seats and 0 accessible**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

871

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **61.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 3

872

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **51.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Signage					
868	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$450	**$900**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Cubicles

Reach Range

876

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **AED: 51.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

877

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **FE: 51.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

890

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Where characters have rectangular cross sections, spacing between individual raised characters shall be 1/8" minimum and 4 times the raised character stoke width maximum.

- ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:

○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 4

Severity 3

1/16” between characters. Stroke width too wide.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Men's Restroom

Protrusion Limits

881

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryer: 8.5" at 40" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new hand dryer with maximum depth 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 3

Signage

879

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **7.5" from door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
878	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing). • ***Notes:*** **Braille not below and stroke thickness 20% of height.**	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**
880	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled or radiused** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

⊗ Staff Only

Priority 3

Severity 3

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
882	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**
883	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 4

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Women's Restroom

Protrusion Limits

887

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryer: 8.5" at 39" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new hand dryer with depth less than 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 3

Signage

885

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **7.5" to door swing**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
884	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing). • ***Notes:*** **Braille not below and width to height ratio incorrect.**	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**
886	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

⊗ Staff Only

Priority 3

Severity 3

⊗ Staff Only

Priority 3

Severity 3

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
888	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 3

Facility: **Community Development Offices** Part: **Interior** Floor: **First Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Exit Door

Door Clearance

889

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.6" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:

○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** First Floor **$44,175.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 File/Storage Rooms

General Note

873 • *As-Built Description:*
Refer to notes for observation and recommendation.

• *Proposed Solution:*

• ***Notes:***

PCODE **GN01**

Mitigated:
○ YES
◉ NO

1 JOB

⊗ Staff Only

Priority 4

Employee only work area is not on an accessible route. 0

Handrail

875 • *As-Built Description:*
Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

• *Proposed Solution:*
Provide new guards, including handrail at ramp.

PCODE **ED08**

CBC 2007 **1133B.5.7**

CBC 2019 **Section 1013.2; 1013.3**

Mitigated:
○ YES
◉ NO

20 LF $360 **$7,200**

⊗ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

874

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

1 JOB $510 **$510**

⊗ Staff Only

Priority 4

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Conceptual Costs for **Floor:** Second Floor **$7,710.00**

Facility: **Community Development Offices** Part: **Interior** Floor: **Second Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$51,885.00**

Facility: **Community Development Offices** Part: **Interior** Floor: **Second Floor**

Address: **428 E. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Community Development Offices					**$78,468.00**

Access Compliance Survey Report

Pan Am Park

703 E. Sherwood Way

Facility #: 139

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Changes in Level

1249

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 2.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 LF $63 **$504**

○ Staff Only

Priority 1
Severity 3

Floor or Ground Surface

1250

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **0.75” wide**
  1.0” deep
- *Proposed Solution:*

Fill walkway joints.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

80 LF $120 **$9,600**

○ Staff Only

Priority 1
Severity 2

Facility: **Pan Am Park** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

1251

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

Severity 1

No accessible parking provided. Typical street parking barriers, steep cross slopes.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Playground

Cross Slope

1252

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **5.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

120 SF $75 **$9,000**

○ Staff Only

Priority 1
Severity 3

Play Structure

1247

- *As-Built Description:*

Height of transfer platform is more than 18" or less than 11" above the accessible surface.

- *Proposed Solution:*

Adjust ground or platform height.

- ***Notes:***

PCODE **OC01D**
ADAAG 91 **36 CFR Part 1191**
ADA 2010 **1008.3.1.2**
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.3.1.2**

Mitigated:
○ YES
◉ NO

2 JOB $3,000 **$6,000**

○ Staff Only

Priority 1
Severity 4

Transfer platform 3.5" high.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Surfacing

1246

- *As-Built Description:*

Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951

- *Proposed Solution:*

Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.

- ***Notes:***

Surface is shredded tires.

PCODE **OA01**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.2.6
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.2.6**

Mitigated:
○ YES
◉ NO

1000 SF $27 **$27,000**

○ Staff Only

Priority 1
Severity 4

Tread Surface

1248

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

5 LF $27 **$135**

○ Staff Only

Priority 1
Severity 4

Facility: **Pan Am Park** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Picnic Tables

Non-Fixed Desk

1253

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **16 seats, 0 accessible provided. 16.5" deep.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1

Severity 2

Facility: **Pan Am Park** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Curb Ramp

Cross Slope

1258

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.1%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

160 SF $75 **$12,000**

○ Staff Only

Priority 1
Severity 3

Curb Ramp

1257

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.4%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

8.0% gutter slope. Gutter lip. No domes. Check jurisdiction.

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Conceptual Costs for **Floor:** On-site **$73,239.00**

Facility: **Pan Am Park** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$73,239.00**

Facility: **Pan Am Park** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Women's Restroom

Cross Slope

1254

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.7%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

120 SF $75 **$9,000**

○ Staff Only

Priority 3
Severity 3

Restroom

1256

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3
Severity 1

Facility: **Pan Am Park** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Men's Restroom

Restroom

1255

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

Conceptual Costs for **Floor:** First Floor **$219,000.00**

Facility: **Pan Am Park** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$219,000.00**

Facility: **Pan Am Park** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Pan Am Park					**$292,239.00**

Access Compliance Survey Report

Millview Gymnasium

1901 Clinton Street

Facility #: 15

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Gym

Alarm Signal

2036

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 2
Severity 3

Door

2021

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **64.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 2
Severity 2

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2023	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **2.0" high and 79.0" high at exit door.** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	6	JOB	$900	**$5,400**

○ Staff Only

Priority 2

Severity 2

Door Hardware

2029	• *As-Built Description:* Door does not have accessible operating hardware. • *Proposed Solution:* Provide lever handle or other accessible hardware.	*PCODE* **ID07** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	4	JOB	$450	**$1,800**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Stopper

2034

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

5 JOB $75 **$375**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Door Swing

2020

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2030	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **6.5"** • *Proposed Solution:* Remove latch or install directional signage.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
2022	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **12.0" deep alcove.** • *Proposed Solution:* Provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

○ Staff Only

Priority 2

Severity 3

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

2024

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **51.6”**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

4 JOB $900 **$3,600**

○ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Protrusion Limits

2028

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **5.5” at 38.0”**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

2027

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **53.0”**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Signage

2033

- *As-Built Description:*

Sign characters not readable because they are not sized for viewing distance.

- *As-Built:* **1.0” characters at 98.0” high**
- *Proposed Solution:*

Provide compliant signage.

PCODE **SA02A**
ADAAG 91 **4.30.3**
ADA 2010 **703.5.5**
CBC 2007 **1117B.5.4**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 2
Severity 4

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2032	• *As-Built Description:* At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT" sign at door.	*PCODE* **SA10A** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	2	JOB	$270	**$540**
2035	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	5	JOB	$450	**$2,250**

○ Staff Only

Priority 2

Severity 3

○ Staff Only

Priority 2

Severity 4

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tray Pass-thru

2031

- *As-Built Description:*

Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor.

- *As-Built:* **36.0"**
- *Proposed Solution:*

Remodel pass-thru and counter to be 34" max. above floor.

PCODE **FB04**
ADAAG 91 **5.2**
ADA 2010 **902.3**
CBC 2007 **1122B.4**
CBC 2019 **11B-902.3**

Mitigated:

○ YES
◉ NO

1 JOB $9,900 **$9,900**

○ Staff Only

Priority 2

Severity 4

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Boy's Restroom

Restroom

2025

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **100.0" x 152.0"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

In addition to major toilet room barriers the entrance door is 29.0" wide and has noncompliant door maneuvering clearance. There are slopes in the door maneuvering clearance, at the water closet and in the route through the room.

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Girl's Restroom

Restroom

2026

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **142.0" x 100.0"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB ? **$105,000**

○ Staff Only

Priority 3

Severity 1

In addition to major toilet room barriers the entrance door is 29.0" wide and has noncompliant door maneuvering clearance. There are slopes in the door maneuvering clearance, at the water closet and in the route through the room.

Conceptual Costs for **Floor:** First Floor **$244,935.00**

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$244,935.00**

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Millview Gymnasium					**$244,935.00**

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Gym

Door

2098

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **7.8%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

30 SF $120 **$3,600**

○ Staff Only

Priority 2

Severity 2

Conceptual Costs for **Floor:** First Floor **$3,600.00**

Facility: **Millview Gymnasium** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$3,600.00**

Access Compliance Survey Report

Senior Nutrition Kitchen

1901 Clinton Street

Facility #: 15A

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking

Cross Slope

2074

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Slope: 2.6%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

30 SF $75 **$2,250**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

2076

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

- ***Notes:***

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

This curb ramp is within the access aisle, has no domes and slopes 8.6%.

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
2075	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **To 8.6%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	200	SF	$36	**$7,200**
		○ Staff Only				
		Priority **1** ***Severity*** **2**				
	Identification					
2079	• *As-Built Description:* Sign for accessible parking space is missing or non-compliant. • *Proposed Solution:* Provide compliant parking signage.	*PCODE* **EA04B** *ADAAG 91* **4.6.4** *ADA 2010* **502.6** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$945	**$945**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

2080

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **130.0" long.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

- ***Notes:***

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

Consider straight in parking.

2078

- *As-Built Description:*

The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only).

- *Proposed Solution:*

Provide the words "NO PARKING" in each access aisle, painted in 12" high letters, when altering area.

PCODE **EA04D**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

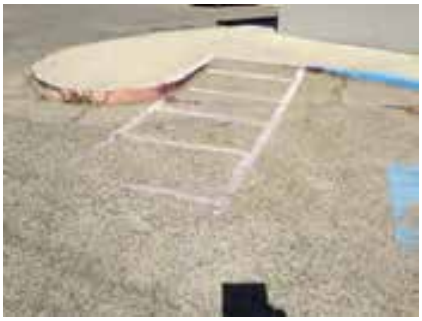

○ Staff Only

Priority 1
Severity 4

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2077	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 1

Severity 3

Parking Signage

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2081	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Landing and Parking at Office Entry

Changes in Level

2091

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **To 1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

80 SF $63 **$5,040**

○ Staff Only

Priority 1
Severity 4

Clear Width

2084

- *As-Built Description:*

Concrete ramp: Width (between handrails) less than 36" min. (CA only: 48" min.)

- *As-Built:* **36.0” to 44.0”**
- *Proposed Solution:*

Modify ramp width to minimum 48" wide.

PCODE **EB10**
ADAAG 91 **4.8.3**
ADA 2010 **405.5**
CBC 2007 **1133B.5.2**
CBC 2019 **11B-405.5**

Mitigated:
○ YES
◉ NO

24 LF $225 **$5,400**

○ Staff Only

Priority 1
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
2095	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.8%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	20	SF	$75	**$1,500**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				
	Curb Ramp					
2096	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **0.4”** • *Proposed Solution:* Build up parking surface.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		○ Staff Only				
		Priority **1** ***Severity*** **4**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2093	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Door Swing

2085	• *As-Built Description:* Latch approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 24" x 48" or 54" if door has closer (CA only: door width plus 24" x 60"). • *As-Built:* **43.5”** • *Proposed Solution:* Enlarge landing.	*PCODE* **ID27** *ADAAG 91* **Fig. 25(c)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(c)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$9,000	**$9,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

2087

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1
Severity 4

Parking

2086

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **Approximately 100.0" long reduced by adjacent access aisle.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 2

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2090	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**
2089	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
2092	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**
2088	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Ramp					
2082	• *As-Built Description:* Slope not steep but greater than 1:20 (5.0 %) without handrails. • *As-Built:* **6.3% and 11.4% at ramps to door landing.** • *Proposed Solution:* Provide handrails for ramp. • ***Notes:***	*PCODE* **EB03** *ADAAG 91* **4.8.1** *ADA 2010* **405.1** *CBC 2007* **1133B.5.5.1** *CBC 2019* **11B-405.8** **Mitigated:** ○ YES ◉ NO	44	LF	$225	**$9,900**

○ Staff Only

Priority 1

Severity 3

The ramps have a rise of 10.5”

	Slope					
2083	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **11.4%** • *Proposed Solution:* Demolish existing and provide new ramp with handrails.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	10	SF	$300	**$3,000**

○ Staff Only

Priority 1

Severity 3

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2094	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **10.0%** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	30	SF	$300	**$9,000**

○ Staff Only

Priority 1

Severity 1

Conceptual Costs for **Floor:** On-site **$71,010.00**

Facility: **Senior Nutrition Kitchen** Part: **Exterior** Floor: **On-site**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$71,010.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Gym

Door

2097

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **6.2%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

30 SF $120 **$3,600**

○ Staff Only

Priority 2
Severity 3

Door

2073

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *As-Built:* **9.0"**
- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2043	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.1%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	30	SF	$120	**$3,600**
2067	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **50.0"** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 4

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

2069

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **4.0"**
- *Proposed Solution:*

Change door swing and or reconfigure counter.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 2

2037

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **2.0", 16.0" deep alcove.**
- *Proposed Solution:*

Remove latch.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 3

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Threshold					
2070	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.6”** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**
		○ Staff Only				
		Priority **4** ***Severity*** **4**				
	Electrical					
2072	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **61.0” high** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height.	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**
		○ Staff Only				
		Priority **4** ***Severity*** **2**				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surface

2044

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *Proposed Solution:*

Provide new grating, with grid openings 1/2" max. along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 SF $240 **$240**

○ Staff Only

Priority 4
Severity 2

Manuevering Clearance

2039

- *As-Built Description:*

Clearance between all opposing base cabinets, counter tops, appliances, or walls is not 40" minimum.

- *Proposed Solution:*

Provide clearance by relocating obstructing walls and / or cabinets.

- ***Notes:***

Pass through kitchen 37.0" wide.

PCODE **KF01**
ADAAG 91 **13.3.4(1)**
ADA 2010 **804.2.1**
CBC 2007 **1111B.5.1**
CBC 2019 **11B-804.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 4
Severity 4

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2041	• *As-Built Description:* Clearance between all opposing base cabinets, counter tops, appliances, or walls is not 40" minimum. • *Proposed Solution:* Provide clearance by relocating obstructing walls and / or cabinets. • ***Notes:***	*PCODE* **KF01** *ADAAG 91* **13.3.4(1)** *ADA 2010* **804.2.1** *CBC 2007* **1111B.5.1** *CBC 2019* **11B-804.2.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 3

Severity 4

34.0" wide for 30.0" long

Reach Range

2040	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **The reach to the top is obstructed by the rim of the stove.** • *Proposed Solution:* Modify equipment or mounting. • ***Notes:***	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 4

Cooktop 34.75" AFF

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2045	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **37.0" high obstruction.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**
2047	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **7.5"** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

○ Staff Only

Priority 4

Severity 3

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2048	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **Storage 67.0”** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
2049	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **55.0” over 37.0” high obstruction.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 2

○ Staff Only

Priority 4

Severity 4

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2051	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **26.0" deep.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
2071	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **61.0". Blocked.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

2068

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:

○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 4

Severity 3

Sink

2050

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **37.0"**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:

○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 4

Severity 4

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2042	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 2

Tray Pass-thru

2038	• *As-Built Description:* Food tray pass-thru at institutional cafeteria has lower edge higher than 34" above floor. • *Proposed Solution:* Remodel pass-thru and counter to be 34" max. above floor. • ***Notes:***	*PCODE* **FB04NT** *ADAAG 91* **5.2** *ADA 2010* **902.3** *CBC 2007* **1122B.4** *CBC 2019* **11B-902.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$9,900	**$9,900**

○ Staff Only

Priority 4

Severity 3

36.0” high tray slide. This tray slide is on the server side of the one in the gym.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2046	**Vertical Clearance** • *As-Built Description:* Overhead clearance less than 80" above finished floor. • *As-Built:* **72.0" to 79.5"** • *Proposed Solution:* Raise the hood and sprinklers.	*PCODE* **EG01A** *ADAAG 91* **4.4.2** *ADA 2010* **307.4** *CBC 2007* **1133B.8.6.2** *CBC 2019* **11B-307.4** **Mitigated:** ○ YES ◉ NO	8	LF	$900	**$7,200**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Laundry, Storage and Office

Corridor

2064

- *As-Built Description:*

Corridor, for occupant load less than 10, less than 36" wide.

- *As-Built:* **23.0"**
- *Proposed Solution:*

Remove or relocate furniture and storage items.

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 3

Door

2060

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **49.0" to 51.0"**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

2052

• *As-Built Description:*

Door does not have accessible operating hardware.

• *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:

○ YES
◉ NO

5 JOB $450 **$2,250**

○ Staff Only

Priority 4

Severity 3

Door Swing

2057

• *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

• *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

4 JOB $150 **$600**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

2058

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **70.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 4
Severity 1

2065

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **14.0" to plug. 10.0" to bottom of box.**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

3 JOB $900 **$2,700**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

2063

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **42.0"**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 4
Severity 3

Reach Range

2054

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **50.0"**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2055	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **58.0"** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2056	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **50.0"** • *Proposed Solution:* Modify equipment or mounting. • ***Notes:***	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2062	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **66.0"** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
2066	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **61.0"** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 2

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

2059

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 4
Severity 3

2061

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

6 JOB $450 **$2,700**

○ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
2053	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.0"** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 4

Conceptual Costs for **Floor:** First Floor **$81,780.00**

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$81,780.00**

Facility: **Senior Nutrition Kitchen** Part: **Interior** Floor: **First Floor**

Address: **1901 Clinton Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Senior Nutrition Kitchen					**$156,390.00**

Access Compliance Survey Report

Transit Center

1951 Independence Drive

Facility #: 181

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking

Detectable Warning Surface

2125

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Domes 7.5” from street at parallel curb ramp.

Parking Signage

2124

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.8.2**

Mitigated:
○ YES
◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Door

Door

2126

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.8%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 1

Severity 4

Facility: **Transit Center** Part: **Exterior** Floor: **On-site**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Curb Ramps

Detectable Warning Surface

2127

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 1
Severity 3

Domes are 16.0” from street x 2

Door

2128

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 1
Severity 3

Conceptual Costs for **Floor:** On-site **$8,775.00**

Facility: **Transit Center** Part: **Exterior** Floor: **On-site**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$8,775.00**

Facility: **Transit Center** Part: **Interior** Floor: **First Floor**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Lobby

Door Threshold

2102

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **0.7"**
- *Proposed Solution:*

Modify threshold.

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

○ Staff Only

Priority 1
Severity 4

Doormat

2100

- *As-Built Description:*

Doormat hinders access to disabled persons.

- *Proposed Solution:*

Provide new doormat; recess or attach at edges.

PCODE **ID05**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

3 JOB $1,500 **$4,500**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

2103

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain).

- *As-Built:* **26.87"**
- *Proposed Solution:*

Relocate drinking fountain.

PCODE **IA02**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $9,600 **$9,600**

○ Staff Only

Priority 1
Severity 2

Public Counter

2099

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **36.0"**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

2101

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **54.0”**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Signage

2122

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

11 JOB $450 **$4,950**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Women's Restroom

Accessories

2106

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Grab Bars

2107

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 11.0" on narrow side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

Facility: **Transit Center** Part: **Interior** Floor: **First Floor**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2109	• *As-Built Description:* Grab bar clearance not 1-1/2" from wall. • *As-Built:* **1.3”** • *Proposed Solution:* Provide accessible grab bars.	*PCODE* **WB07E** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1115B.7.1** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**
2108	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **Flush control: 0.3” below grab bar** • *Proposed Solution:* Reconfigure plumbing.	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

2105

• *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

• *Proposed Solution:*

Insulate or cover water/drain pipe and supply lines.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Operable Part

2104

• *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

• *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:

○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom

Accessories

2112

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

2118

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **4.0" in front. To center of rolls. 8.5" to center of dispenser housing.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

2119

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 11.5" on narrow side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

2117

- *As-Built Description:*

Grab bar clearance not 1-1/2" from wall.

- *As-Built:* **1.26"**
- *Proposed Solution:*

Provide accessible grab bars.

PCODE **WB07E**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1115B.7.1**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2116	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **Flush control: 1.2" below grab bar** • *Proposed Solution:* Reconfigure plumbing.	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

2111	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe and supply lines.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Operable Part

2113

- *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

- *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

Shower

2115

- *As-Built Description:*

Floor surface sloped greater than 2.0% (1:48) due to drain.

- *Proposed Solution:*

Remodel floor surface to compliance.

- ***Notes:***

0.14" level change at WC

PCODE **WF06A**
ADA 2010 **608.9**
CBC 2019 **11B-608.9**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

2110

- *As-Built Description:*

Edges and vertices on geometric symbols shall be eased or rounded at 1/16" min. or chamfered at 1/8" maximum. Vertices shall be radiused between 1/8" minimum and 1/4" maximum.

- *As-Built:* **0.5" radius**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**

CBC 2007 **1115B.6**

CBC 2019 **11B-703.7.2.6**

Mitigated:

○ YES

◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3

Severity 3

Urinal

2114

- *As-Built Description:*

Fixture mounted with rim more than 17" above floor.

- *As-Built:* **17.5"**
- *Proposed Solution:*

Provide accessible urinal. Remodel restroom as needed.

PCODE **WE02**

ADAAG 91 **4.18.2**

ADA 2010 **605.2**

CBC 2007 **1115B.4.2.1**

CBC 2019 **11B-605.2**

Mitigated:

○ YES

◉ NO

1 JOB $7,200 **$7,200**

○ Staff Only

Priority 3

Severity 4

Facility: **Transit Center** Part: **Interior** Floor: **First Floor**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1	• *As-Built Description:* 36" wide clearance in front of accessible urinal not provided when walls or partitions project more than 24" from the front edge of 30" x 48" clear space. • *Proposed Solution:* Provide 36" clear floor space in front of accessible urinal. Remodel restroom as needed.	*PCODE* **WE04A** *ADAAG 91* **4.18.3** *ADA 2010* **605.3** *CBC 2007* **1115B.4.2.3** *CBC 2019* **11B-605.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Conference

Assistive Listening

2120

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) & 4.33.7**
ADA 2010 **219.1 & 706.1**
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 2
Severity 3

Signage

2121

- *As-Built Description:*

At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT ROUTE" sign at door.

PCODE **SA10D**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Breakroom

Non-Fixed Desk

2123

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **8 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 2

Severity 2

Conceptual Costs for **Floor:** First Floor **$56,595.00**

Facility: **Transit Center** Part: **Interior** Floor: **First Floor**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$56,595.00**

Facility: **Transit Center** Part: **Interior** Floor: **First Floor**

Address: **1951 Independence Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Transit Center					**$65,370.00**

Access Compliance Survey Report

Fire Station 58

2558 Condor Drive

Facility #: 182

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Staff Accessible Parking and Route

Non-Fixed Desk

632

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

⊗ Staff Only

Priority 4
Severity 2

Parking

631

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **104.0" wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

⊗ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Accessible Parking and Route

Cross Slope

637

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.7%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

100 SF $75 **$7,500**

⊗ Staff Only

Priority **1**
Severity **4**

Door Swing

639

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **2.0"**
- *Proposed Solution:*

Provide power door operator.

PCODE **ID23C**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $15,000 **$15,000**

⊗ Staff Only

Priority **1**
Severity **2**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
640	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **0.0" to 12.0"** • *Proposed Solution:* Extend concrete.	*PCODE* **ID23C** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

⊗ Staff Only

Priority 1

Severity 4

Parking

633	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **106.5" wide** • *Proposed Solution:* Modify parking space(s) to create accessible space.	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**

○ Staff Only

Priority 1

Severity 2

Facility: **Fire Station 58** Part: **Exterior** Floor: **On-site**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
638	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **39.5" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	150	SF	$135	**$20,250**

⊗ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** On-site **$51,750.00**

Facility: **Fire Station 58** Part: **Exterior** Floor: **On-site**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$51,750.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Laundry

Door Swing

610

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **16.0" to sink, 12" to counter.**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Treatment Room

General Note

635

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority **2**

Severity **2**

Exam table 31.0" high. Per Access Board medical equipment accessibility standards; transfer surfaces shall be adjustable in height measured from the floor to the top of the uncompressed transfer surface 17" minimum and 19" maximum.

Sink

612

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **37.0" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:

○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority **4**

Severity **4**

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
611	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Public Restroom

Accessories

620

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **4.0”**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

614

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.6” high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Clear Floor Space

618

- *As-Built Description:*

Clear space has slopes greater than 1:48.

- *As-Built:* **6.9% slope at WC x 1.0'.**
- *Proposed Solution:*

Modify surface and/or adjust drain.

PCODE **NI07**
ADAAG 91 **16.6.6**
ADA 2010 **305.2**
CBC 2007 **1132B.1**
CBC 2019 **11B-305.2**

Mitigated:
○ YES
◉ NO

1 SF

○ Staff Only

Priority 3
Severity 3

Grab Bars

621

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **1.2"**
- *Proposed Solution:*

Raise the grab bar.

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

615

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.87" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

616

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.5" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
617	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

613	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
619	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **16.5" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Lobby

Door

636

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **5.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 1
Severity 3

Drinking Fountain

622

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). Unit in good condition.

- *As-Built:* **26.6" knee high**
- *Proposed Solution:*

Remount fountain at accessible height.

PCODE **IA02A**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Battalion Chief Bunk Restroom

Restroom

623

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 3

Severity 2

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Captain Bunk Restroom

Restroom

624

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 3

Severity 2

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Staff Restroom

Restroom

625

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority **4**

Severity **2**

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Staff Restroom

Restroom

626

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Kitchen

Sink

628

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **36.0" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 4
Severity 4

627

- *As-Built Description:*

Sink does not have knee space min. 27" high x 19" deep x 30" wide.

- *Proposed Solution:*

Remodel sink cabinet.

PCODE **IN06A**
ADAAG 91 **4.24.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.2**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Apparatus Bay

Cross Slope

629

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.4%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

5 SF $75 **$375**

⊗ Staff Only

Priority 4
Severity 4

Restricted road way.

Signage

634

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

⊗ Staff Only

Priority 4
Severity 4

Sign is inside the bay. It should be placed outside of the bay. According to the staff, this is a private contamination area.

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Apparatus Bay Restroom

Restroom

630

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

- ***Notes:***

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 3

Severity 2

According to the staff, this is an employee decon area - restricted.

Conceptual Costs for **Floor:** First Floor **$487,305.00**

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$487,305.00**

Facility: **Fire Station 58** Part: **Interior** Floor: **First Floor**

Address: **2558 Condor Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Fire Station 58					**$539,055.00**

Access Compliance Survey Report

Madera Municipal Airport

4020 Aviation Drive

Facility #: 23

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Protrusion Limits

690

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **54.0” high**
- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Routes to Lobby

Changes in Level

680

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0" at gutter. Gap in access aisle.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

30 LF $63 **$1,890**

○ Staff Only

Priority 1
Severity 4

699

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **3.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 1
Severity 2

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
700	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **2.0"** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	6	SF	$300	**$1,800**

○ Staff Only

Priority 1

Severity 3

735	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **0.75"** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	15	LF	$120	**$1,800**

○ Staff Only

Priority 1

Severity 4

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
3	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **2"** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	3	SF	$63	**$189**

○ Staff Only

Priority 1

Severity 3

Cross Slope

689	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **4.4%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	40	SF	$75	**$3,000**

○ Staff Only

Priority 1

Severity 3

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
695	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **4.3%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	30	SF	$75	**$2,250**

○ Staff Only

Priority 1

Severity 3

Curb Ramp

682	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **9.3%** • *Proposed Solution:* Demolish existing and provide new curb ramp. • ***Notes:***	*PCODE* **EH02A** *ADAAG 91* **4.7.2** *ADA 2010* **406.1** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 4

Domes are 5.5" from street. Domes are not yellow. There is a level change where the domes meet the curb ramp.

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
683	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **6.1%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**

○ Staff Only

Priority 1

Severity 4

685	• *As-Built Description:* Less than 48" level space at top and 1:12 flared sides not provided. • *As-Built:* **45.0" deep obstructed by the ramp handrail.** • *Proposed Solution:* Demolish existing and provide new curb ramp. • ***Notes:***	*PCODE* **EH05B** *ADAAG 91* **4.7.5; Fig.12(a)** *ADA 2010* **406.4** *CBC 2007* **1127B.5.4** *CBC 2019* **11B-406.5.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 4

The handrail protrudes into the 48.0" required with by approximately 3.0", reducing the landing width to 45.0".

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

701

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **0.75"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

2 JOB $1,200 **$2,400**

○ Staff Only

Priority 1
Severity 4

Floor or Ground Surfaces

679

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **3.1%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

100 SF $36 **$3,600**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

684

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

CBC 2019 **11B-405.10**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

Water accumulates at the curb ramp.

0

Handrails

694

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**

ADAAG 91 **4.8.5 & 4.9.4**

ADA 2010 **505.2**

CBC 2007 **1133B.4.1.1**

CBC 2019 **& .5.5**

11B-505.2

Mitigated:

○ YES

◉ NO

13 LF $285 **$3,705**

○ Staff Only

Priority 1

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:

1,,,

2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

678

- *As-Built Description:*

An accessible parking space shall be outlined or painted blue (required in CA only).

- *Proposed Solution:*

Identify accessible parking space using blue markings.

PCODE **EA04K**

CBC 2019 **11B-502.6**

Mitigated:

○ YES

◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 1

Severity 3

Parking Signage

776

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
681	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 3

Protrusion Limits

697	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Stair extension: 15.0" at 36.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface. • ***Notes:***	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	3	JOB	$300	**$900**

○ Staff Only

Priority 1

Severity 1

Both stairs.

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stairways					
693	• *As-Built Description:* Landing at the top or bottom of stairway is not level or not provided. • *As-Built:* **6.3%** • *Proposed Solution:* Remodel landings to provide a level clear floor space that extends the entire width of the stair.	*PCODE* **EC10** *CBC 2019* **1009.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

692

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:

○ YES
◉ NO

1 JOB $510 **$510**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
696	• *As-Built Description:* Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing. • *Proposed Solution:* Extend stair handrail at top and bottom (cost for each extension piece).	*PCODE* **ED06** *ADAAG 91* **4.9.4(2)** *ADA 2010* **505.10.2; 505.10.3** *CBC 2007* **1133B.4.2.2** *CBC 2019* **11B-505.10.2; 11B-505.10.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$510	**$1,020**

○ Staff Only

Priority 1

Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B-504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when the stairs are altered"

Top and Bottom Extension at

686	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *As-Built:* **0.0" at the top. 9.0" at the bottom.** • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece). • ***Notes:***	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	2	JOB	$510	**$1,020**

○ Staff Only

Priority 1

Severity 3

The extension at the bottom is not parallel with the landing and extends 9.0".

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Tread Surface

691

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

80 LF $27 **$2,160**

○ Staff Only

Priority 1
Severity 4

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Walk

687

- *As-Built Description:*

Walk more than 36" but less than 48" wide (required in CA only).

- *As-Built:* **47.0" walking surfaces. 41.0" at obstructions.**
- *Proposed Solution:*

Enlarge width of walk to 48".

PCODE **EF08**
CBC 2007 **1133B.7.1**
CBC 2019 **11B-403.5.1.3**

Mitigated:
○ YES
◉ NO

120 SF $135 **$16,200**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
688	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **47.0" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	80	SF	$135	**$10,800**
698	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **30.0" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	240	SF	$135	**$32,400**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Park

Cross Slope

780

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **7.7%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

50 SF $75 **$3,750**

○ Staff Only

Priority 1
Severity 2

Detectable Warning

778

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

4 LF $81 **$324**

○ Staff Only

Priority 1
Severity 3

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surface					
779	• *As-Built Description:* Walk: openings greater than 1/2" along the line of traffic flow. • *As-Built:* **2.0"** • *Proposed Solution:* Fill gap or expansion joint.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	4	SF	$120	**$480**
		○ Staff Only				
		Priority **1** ***Severity*** **2**				
	Walk					
777	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **9.6%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	100	SF	$75	**$7,500**
		○ Staff Only				
		Priority **1** ***Severity*** **3**				

Conceptual Costs for **Floor:** On-site **$120,135.00**

Facility: **Madera Municipal Airport** Part: **Exterior** Floor: **On-site**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$120,135.00**

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Hangars

Door Closer

736

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **20.0 lbs.**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

7 JOB $75 **$525**

○ Staff Only

Priority 4
Severity 1

Door Threshold

676

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

- ***Notes:***

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

7 JOB $1,200 **$8,400**

○ Staff Only

Priority 4
Severity 4

Occurs at all hangars. 123 hangars, 0 accessible provided.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

677

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

- ***Notes:***

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:

○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 1

Severity 3

There are 9 hangar buildings that are approximately 55.0' wide at the end where people park. Ensure the route to the hangars is improved where the accessible parking is added.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Lobby

Door Hardware

733

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

6 JOB $450 **$2,700**

○ Staff Only

Priority 1
Severity 3

Drinking Fountain

704

- *As-Built Description:*

30" wide x 48" long clear floor space not provided at drinking fountain.

- *As-Built:* **Not centered**
- *Proposed Solution:*

Provide clear floor space at drinking fountain.

- ***Notes:***

PCODE **IA06**
ADAAG 91 **4.15.5(1)***
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 1
Severity 3

This element complied with Safe Harbor and CBC if altered or constructed before March 15, 2012.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

708

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.2" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

734

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **20.0" side reach over 38.0" high obstruction.**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

732

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **8 seats. 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

703

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Work stations: 34.0" at 38.0" high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

14 LF $300 **$4,200**

○ Staff Only

Priority 1
Severity 2

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

705

- *As-Built Description:*

Reach height to control or access point, exceeds 48" or is less than 15".

- *As-Built:* **69.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE01**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **1118B.5**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 1

Signage

702

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 1

Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Sink

707

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **36.5" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 1
Severity 4

Vending Machine

706

- *As-Built Description:*

Vending machine coin slot or dispensing outlet, more than 48" above the floor.

- *As-Built:* **13.0" to bottom of the dispenser tray. 50.5" to bill slot.**
- *Proposed Solution:*

Advise vendor/leasing company to provide accessible vending machine with highest operable part at 48" max.

- ***Notes:***

PCODE **IL02**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **1126B**
CBC 2019 **11B-308.2.1**

Mitigated:
○ YES
◉ NO

1 REF

○ Staff Only

Priority 1
Severity 4

This element complies with Safe Harbor and/or CBC if altered or constructed before March 15, 2012.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom

Accessible Compartment

712

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **45.0" to partition. 48.0" to urinal. DMC at compartment.**
- *Proposed Solution:*

Relocate urinal and partitions.

- ***Notes:***

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig. 30(a)**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Accessories

711

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 41.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Changes in Level

727

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route due to drain.

- *As-Built:* **0.5" level change**
  3.8% slope
- *Proposed Solution:*

Correct abrupt change in level and adjust drain as needed.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Coat Hook

731

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **66.5" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Door Swing

726

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **47.25"**
- *Proposed Solution:*

Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

729

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

730

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **1.4"**
- *Proposed Solution:*

Raise the grab bar.

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:

○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

710

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **34.5" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 4

Protrusion Limits

725

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0" at 38.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

714

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

709

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled. 0.5" radius. 60.5" high.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

728

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.7" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Women's Restroom

Accessories

720

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 42.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Changes in Level

723

- *As-Built Description:*

Walk: abrupt change in level exceeding 1/2" in accessible route due to drain.

- *As-Built:* **0.75"**
- *Proposed Solution:*

Correct abrupt change in level and adjust drain as needed.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

25 SF $63 **$1,575**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

716

- *As-Built Description:*

Front approach: At pull side, stall door does not have clear and level maneuvering space measuring door width plus 18" x 60".

- *As-Built:* **38.0" to lavatory counter**
- *Proposed Solution:*

Relocate counter and lavatory.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 2

722

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
713	• *As-Built Description:* Latch approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 24" x 48" or 54" if door has closer (CA only: door width plus 24" x 60"). • *As-Built:* **43.5"** • *Proposed Solution:* Relocate door to interior.	*PCODE* **ID27** *ADAAG 91* **Fig. 25(c)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(c)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$9,000	**$9,000**

○ Staff Only

Priority 3

Severity 3

Grab Bars

724	• *As-Built Description:* Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet). • *As-Built:* **Extends 52.5"** • *Proposed Solution:* Provide or relocate accessible side grab bar.	*PCODE* **WB07A** *ADAAG 91* **Fig. 29(b)** *ADA 2010* **604.5.1** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **11B-604.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
721	• *As-Built Description:* Grab bars not at 33" to 36" from floor • *As-Built:* **37.0" high** • *Proposed Solution:* Relocate accessible grab bars.	*PCODE* **WB07C** *ADAAG 91* **4.16.4** *ADA 2010* **609.4** *CBC 2007* **1115B.4.1.3.1 & 2** *CBC 2019* **11B-609.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 4

Lavatory

719	• *As-Built Description:* Lavatory: Fixture rim or counter height more than 34" above floor. • *As-Built:* **34.25" high** • *Proposed Solution:* Remount compliant fixture at accessible height.	*PCODE* **WD02A** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,700	**$2,700**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

715

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

- ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Door swings out. No latch.

Stall Door

717

- *As-Built Description:*

Stall door to accessible compartment not self closing.

- *Proposed Solution:*

Adjust closer.

PCODE **WB05B**
ADAAG 91 **4.22.4**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.4**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
718	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Hangar Restrooms

Restroom

737

- *As-Built Description:*

Multiple accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **95.5" x 185.0"**
- *Proposed Solution:*

Remodel area to provide accessible restroom with one accessible stall, lavatory (and one urinal at Men's).

- ***Notes:***

PCODE **WA01A**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.1**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

JOB ?

○ Staff Only

Priority 3

Severity 1

Includes inaccessible shower. The restroom is in the hangar just to the west of the easternmost hangar.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Pagoda and On-Site Restrooms

Changes in Level

740

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

60 LF $63 **$3,780**

○ Staff Only

Priority 3
Severity 3

Curb Ramp

741

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

742

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3

Severity 3

775

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

738

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **12 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 2

Operable Part

774

- *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

- *As-Built:* **Greater than 35.0 lbs**
- *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

739

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Structural supports: 14.0” at 74.0” high**
- *Proposed Solution:*

Provide cane-detectable railing to mark area of low clearance.

PCODE **EG04A**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

24 LF $300 **$7,200**

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Women's Restroom at Pagoda

Accessible Route

757

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:

○ YES
◉ NO

10 LF $135 **$1,350**

○ Staff Only

Priority 3

Severity 3

Accessories

754

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD & SD: 41.5" and 54" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:

○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3

Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
751	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **Behind water closet.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 1

Door

745	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **5.0%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
747	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **52.0" and 60.0" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 2

Door Swing

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
746	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **10.75"** • *Proposed Solution:* Remove latch.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

748

• *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

• *As-Built:* **56.0" high**

• *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3

Severity 3

Grab Bars

750

• *As-Built Description:*

Grab bars not provided or are not code compliant.

• *Proposed Solution:*

Provide accessible grab bars.

PCODE **WB07**
ADAAG 91 **4.17.6**
ADA 2010 **604.5**
CBC 2007 **1115B.4.1.3**
CBC 2019 **11B-604.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

755

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.75" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:

○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3

Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

756

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:

○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

753

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Signage

743

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
744	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

752	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **52.5" to lavatory** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

749

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **19.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Men's Restroom at Pagoda

Accessories

771

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD & SD: 44.0" and 53.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 2

773

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **5.5" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

759

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.6%**
  36.0" deep
- *Proposed Solution:*

Install landing.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 UNI $900 **$900**

○ Staff Only

Priority 3
Severity 4

764

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **60.5" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

763

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **10.75"**
- *Proposed Solution:*

Remove latch.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Door Threshold

762

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **3.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 3
Severity 1

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

765

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **56.5" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

Grab Bars

772

- *As-Built Description:*

Grab bars not provided or are not code compliant.

- *Proposed Solution:*

Provide accessible grab bars.

PCODE **WB07**
ADAAG 91 **4.17.6**
ADA 2010 **604.5**
CBC 2007 **1115B.4.1.3**
CBC 2019 **11B-604.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

766

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **17.6" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

767

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **35" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

768

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Protrusion Limits

769

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

760

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

761

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

770

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **53.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**

ADA 2010 **604.3.1; 604.3.2**

CBC 2007 **1115B.7.1.3**

CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:

○ YES

◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Walk

758

- *As-Built Description:*

Walk more than 36" but less than 48" wide (required in CA only).

- *As-Built:* **29.0" wide**
- *Proposed Solution:*

Enlarge width of walk to 48".

PCODE **EF08**

CBC 2007 **1133B.7.1**

CBC 2019 **11B-403.5.1.3**

Mitigated:

○ YES

◉ NO

40 SF $135 **$5,400**

○ Staff Only

Priority 3

Severity 2

Conceptual Costs for **Floor:** First Floor **$147,465.00**

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$147,465.00**

Facility: **Madera Municipal Airport** Part: **Interior** Floor: **First Floor**

Address: **4020 Aviation Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Madera Municipal Airport					**$267,600.00**

Access Compliance Survey Report

Centennial Park Swimming Pool

221 Flume Street

Facility #: 26

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Accessible Route from PRoW

Changes in Level

314

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

5 LF $63 **$315**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

306

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **0.3"**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

Facility: **Centennial Park Swimming Pool** Part: **Exterior** Floor: **On-site**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning Surface

308

- *As-Built Description:*

The detectable warning surface is not located between 6"- 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp.

- *Proposed Solution:*

Relocate the detectable warning surface.

- ***Notes:***

PCODE **PW15**
ADAAG 91 **4.7.7, 4.29.1&2**
ADA 2010 **705.1**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

9.0” to flush transition at parallel curb ramp.

Door

315

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Centennial Park Swimming Pool** Part: **Exterior** Floor: **On-site**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

316

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Service counter: 8.0” at 29.0” high**
- *Proposed Solution:*

Add cane detectable side panels.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Ramp Landing

307

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

- ***Notes:***

PCODE **PC23A**
ADAAG 91 **4.8.4**
PROW **R304.3.1**
CBC 2007 **1127B.5.9**
CBC 2019 **11B-406.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

48.0” x 45.0” landing at parallel curb ramp.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Parking

Curb Ramp

309

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **5.3%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Floor or Ground Surfaces

310

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **5.0%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

1 SF $36 **$36**

○ Staff Only

Priority 1
Severity 3

Facility: **Centennial Park Swimming Pool** Part: **Exterior** Floor: **On-site**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
311	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **7.5% at gutter** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	20	SF	$36	**$720**

○ Staff Only

Priority 1

Severity 2

Parking

312	• *As-Built Description:* Accessible parking space smaller than 8' wide (CA only: 9' x 18'). • *As-Built:* **178.0"** • *Proposed Solution:* Modify parking space(s) to create accessible space. • ***Notes:***	*PCODE* **EA02A** *ADAAG 91* **4.6.3** *ADA 2010* **502.2** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**

○ Staff Only

Priority 1

Severity 3

Obstructed by pillar.

Facility: **Centennial Park Swimming Pool** Part: **Exterior** Floor: **On-site**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Fence

Protrusion Limits

313

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Fence: 9.5” at 78.0” to 79.0” high**
- *Proposed Solution:*

Modify existing fence.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1

Severity 2

Conceptual Costs for **Floor:** On-site **$24,021.00**

Facility: **Centennial Park Swimming Pool** Part: **Exterior** Floor: **On-site**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$24,021.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Concession

Electrical

260

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **51.0" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

⊗ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Floor or Ground Surface

258

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *Proposed Solution:*

Provide new grating, with grid openings 1/2" max. along the line of traffic flow.

- ***Notes:***

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 SF $240 **$240**

⊗ Staff Only

Priority 2
Severity 2

According to staff this will be covered by the ice maker.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

261

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED: 7.2" at 47.5" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 3

Reach Range

262

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Signage					
259	• *As-Built Description:* Sign not located on latch side of door and/or not located at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters. • *As-Built:* **37.5" high** • *Proposed Solution:* Provide compliant signage including tactile characters and Grade II Braille on latch side of door located at compliant height.	*PCODE* **SA07** *ADAAG 91* **4.30.6** *ADA 2010* **703.4.1** *CBC 2007* **1117B.5.7** *CBC 2019* **11B-703.4.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

⊗ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Women's Restroom

Accessories

270

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Bench

267

- *As-Built Description:*

Clear floor space to allow parallel transfer onto bench not provided.

- *Proposed Solution:*

Remodel dressing room to provide 30" x 48" alongside bench.

- ***Notes:***

PCODE **RE04B**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $4,500 **$4,500**

○ Staff Only

Priority 3
Severity 2

Not at the end of the bench.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Coat Hook

272

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **49.25" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Door Closer

264

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **2.5 seconds**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

269

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 18.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Lavatory

266

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **34.25" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

265

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryers: 7.0” at 33.0” and 38.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 3

Signage

263

- *As-Built Description:*

Signs containing tactile characters is not located so that a clear floor space of 18" min x 18" min., centered on the tactile characters, is provided beyond the arc of any door swing between the closed position and 45 degree open position.

- *As-Built:* **8.5” from door swing.**
- *Proposed Solution:*

Relocate compliant signage on latch side of door located at compliant height with a clear floor space.

- ***Notes:***

PCODE **SA07B**
ADA 2010 **703.4.2**
CBC 2019 **11B-703.4.2**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Before the 2010 ADA there was no measurement defining what it meant to stand outside of the door swing, and no requirement that the CLFS be centered, therefore consider whether this condition complies with 1991 ADA and is a Safe Harbor if installed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Toilet Stall					
268	• *As-Built Description:* Baby changing tables shall not be located in accessible toilet compartments. • *Proposed Solution:* Relocate baby changing table outside of accessible toilet compartment.	*PCODE* **WB01C** *CBC 2019* **11B-226.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

	Water Closet					
271	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **18.6" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom

Accessories

284

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **12.0" in front**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

277

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.5" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 3

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Bench

280

- *As-Built Description:*

Clear floor space to allow parallel transfer onto bench not provided.

- *Proposed Solution:*

Remodel dressing room to provide 30" x 48" alongside bench.

PCODE **RE04B**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $4,500 **$4,500**

○ Staff Only

Priority 3
Severity 2

Coat Hook

281

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **49.3" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

282

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 18.0" on wide side**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Lavatory

276

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **35" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

278

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Protrusion Limits

275

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryers: 33.0” to 38.5” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Urinal

279

- *As-Built Description:*

Fixture mounted with rim more than 17" above floor.

- *As-Built:* **19.0" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WE02A**
ADAAG 91 **4.18.2**
ADA 2010 **605.2**
CBC 2007 **1115B.4.2.1**
CBC 2019 **11B-605.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Water Closet

283

- *As-Built Description:*

Flush Control: Operating handle not mounted toward wide side of stall.

- *Proposed Solution:*

Replace flush control with properly mounted accessible type, or install sensor flush.

PCODE **WB10**
ADAAG 91 **4.16.5**
ADA 2010 **604.6**
CBC 2007 **1115B.4.1.5**
CBC 2019 **11B-604.6**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Pool Area

Changes in Level

288

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.75”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

1 SF $63 **$63**

○ Staff Only

Priority 3
Severity 4

289

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.75”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

30 LF $63 **$1,890**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
301	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **1.0"** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	1	SF	$63	**$63**

○ Staff Only

Priority 3

Severity 4

Cross Slope

287	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.3%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	20	SF	$75	**$1,500**

○ Staff Only

Priority 3

Severity 4

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
300	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 4.2%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	200	SF	$75	**$15,000**

○ Staff Only

Priority 3

Severity 3

Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
285	• *As-Built Description:* At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface. • *Proposed Solution:* Provide 10" min. "kick plate" covering width of door when altering area.	*PCODE* **ID06** *ADA 2010* **404.2.10** *CBC 2007* **1133B.2.6** *CBC 2019* **11B-404.2.10** **Mitigated:** ○ YES ◉ NO	3	JOB	$300	**$900**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

273

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain).

- *As-Built:* **26.75" knee high**
- *Proposed Solution:*

Provide new, accessible fountain.

PCODE **IA02**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $9,600 **$9,600**

○ Staff Only

Priority 3
Severity 2

Floor or Ground Surface

290

- *As-Built Description:*

Walk: opening greater than 1/2" along the line of traffic flow.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Fill openings or gaps along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 SF $240 **$240**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

291

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

Missing seat unable to veto dimensions.

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 3

0

Height

295

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **32.5" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:

○ YES
◉ NO

70 LF $225 **$15,750**

○ Staff Only

Priority 3

Severity 4

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
303	• *As-Built Description:* Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings. • *As-Built:* **19.0" high** • *Proposed Solution:* Remove existing and provide new handrail.	*PCODE* **ED02** *ADAAG 91* **4.9.4(5)** *ADA 2010* **505.4** *CBC 2007* **1133B.4.2.1 &** *CBC 2019* **B.5.5.1** **11B-505.4** **Mitigated:** ○ YES ◉ NO	4	LF	$225	**$900**

○ Staff Only

Priority 3

Severity 1

Non-Fixed Desk

298	• *As-Built Description:* Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided. • *As-Built:* **50 seats, 0 accessible provided.** • *Proposed Solution:* Provide table or desk with accessible dimensions when purchasing new furniture.	*PCODE* **IN02A** *ADAAG 91* **4.32.3 & .4** *ADA 2010* **306.1** *CBC 2007* **1122B.3 & 4** *CBC 2019* **11B-306.1 &** **11B-902.3** **Mitigated:** ○ YES ◉ NO	3	JOB	$1,500	**$4,500**

○ Staff Only

Priority 3

Severity 2

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

299

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Utility box: 10.5” at 47.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Shower

274

- *As-Built Description:*

Shower not accessible; multiple compliance violations.

- *Proposed Solution:*

Provide accessible shower.

- ***Notes:***

PCODE **WF01**
ADAAG 91 **4.21**
ADA 2010 **608.1**
CBC 2019 **11B-608.1**

Mitigated:
○ YES
◉ NO

1 JOB $12,000 **$12,000**

○ Staff Only

Priority 3
Severity 3

Note - ground slopes 2.4% to 3.0%.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

286

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

- ***Notes:***

PCODE **SA01**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1117B.5.8.1.2**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

1 JOB $690 **$690**

○ Staff Only

Priority 3
Severity 3

Left arrow to other pool entrance. The route through this gate has cross slopes to 3.0%.

Slope

294

- *As-Built Description:*

Level 2% max. landing for ramp not provided.

- *As-Built:* **4.3%**
- *Proposed Solution:*

Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%

PCODE **EB05A**
ADAAG 91 **4.8.4**
ADA 2010 **405.7.1**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.7.1**

Mitigated:
○ YES
◉ NO

16 SF $300 **$4,800**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Stairs

305

• *As-Built Description:*

Stair tread width less than 11", measured horizontally from nosing to nosing.

• *Proposed Solution:*

Rebuild stair as needed.

• ***Notes:***

PCODE **EC06**
ADAAG 91 **4.9.2**
ADA 2010 **504.2**
CBC 2007 **1133B.4.5.3**
CBC 2019 **11B-504.2 & 11B-1009.6**

Mitigated:

○ YES
◉ NO

10 LF $225 **$2,250**

○ Staff Only

Priority 3

Severity 3

Treads Not uniform depth and not parallel to each other.

Stairways

304

• *As-Built Description:*

Landing at the top or bottom of stairway is not level or not provided.

• *As-Built:* **3.7%**

• *Proposed Solution:*

Remodel landings to provide a level clear floor space that extends the entire width of the ramp.

PCODE **EC10**
CBC 2019 **1009.8**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Swimming Pool

292

- *As-Built Description:*

The clear width between required handrail shall be 33" minimum and 38" maximum.

- *As-Built:* **31.5"**
- *Proposed Solution:*

Provide ramp with water-proofed handrails.

PCODE **GJ02**
ADAAG 91 **pending**
ADA 2010 **1009.3**
CBC 2019 **11B-1009.3**

Mitigated:
○ YES
◉ NO

70 LF $294 **$20,580**

○ Staff Only

Priority 3
Severity 4

297

- *As-Built Description:*

At least one accessible means of entry shall be provided for wading pools. Accessible means of entry shall comply with sloped entries complying with Section 11B-1009.3.

- *Proposed Solution:*

Provide compliant sloped entry.

- ***Notes:***

No sloped entry into wading pool.

PCODE **GJ02**
ADAAG 91 **pending**
ADA 2010 **1009.3**
CBC 2019 **11B-1009.3**

Mitigated:
○ YES
◉ NO

70 LF $294 **$20,580**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
296	• *As-Built Description:* Where landings are required, at least one landing shall be located 24" min and 30" max below the stationary water level. • *Proposed Solution:* Provide complaint submerged depth level landing when constructing new sloped entry ramp. • ***Notes:*** **Level landing at sloped entry is 46.0” deep.**	*PCODE* **GJ02NT** *ADAAG 91* **pending** *ADA 2010* **1009.3** *CBC 2019* **11B-1009.3** **Mitigated:** ○ YES ◉ NO	1	LF	$294	**$294**

○ Staff Only

Priority 3

Severity 1

Top and Bottom Extension at

293	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top of ramp. • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1, 11B-1009.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$510	**$1,020**

○ Staff Only

Priority 3

Severity 1

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Treads and Risers					
302	• *As-Built Description:* Steps do not have uniform riser height. • *As-Built:* **5.0" to 6.0" high** • *Proposed Solution:* Remodel stairs as needed.	*PCODE* **EC07A** *ADA 2010* **504.2** *CBC 2007* **1133B.4.5.3** *CBC 2019* **11B-504.2** **Mitigated:** ○ YES ◉ NO	4	LF	$225	**$900**

○ Staff Only

Priority 3

Severity 2

Conceptual Costs for **Floor:** First Floor **$142,335.00**

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$142,335.00**

Facility: **Centennial Park Swimming Pool** Part: **Interior** Floor: **First Floor**

Address: **221 Flume Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Centennial Park Swimming Pool					**$166,356.00**

Access Compliance Survey Report

Wastewater Treatment Plant

13048 Road 21 1/2

Facility #: 39

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Route to Lobby

Curb Ramp

846

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

⊗ Staff Only

Priority 1
Severity 3

Door

788

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.3%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

15 SF $120 **$1,800**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

789

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 1
Severity 4

Floor or Ground Surfaces

787

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **2.9%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

4 SF $36 **$144**

○ Staff Only

Priority 1
Severity 4

Facility: **Wastewater Treatment Plant** Part: **Exterior** Floor: **On-site**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

783

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

1 JOB $945 **$945**

○ Staff Only

Priority 1
Severity 4

Parking

781

- *As-Built Description:*

Accessible parking space does not have 5' wide access aisle; 8' wide for van accessible aisle.

- *As-Built:* **76.0" wide at van space**
- *Proposed Solution:*

Modify parking aisle(s) to create accessible space by restriping.

PCODE **EA02B**
ADAAG 91 **4.6.3**
ADA 2010 **502.3**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2; 11B-502.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 3

Facility: **Wastewater Treatment Plant** Part: **Exterior** Floor: **On-site**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
782	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
786	• *As-Built Description:* No van parking provided (one in every 6 or fraction of 6 accessible spaces, but not less than one. • *Proposed Solution:* Provide van parking space(s) by restriping; provide van sign.	*PCODE* **EA07** *ADAAG 91* **4.1.2(5)(b)** *ADA 2010* **208.2; 502.1** *CBC 2007* **1129B.3.2** *CBC 2019* **11B-208.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,050	**$1,050**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

784

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

1 JOB $975 **$975**

○ Staff Only

Priority 1

Severity 4

785

- *As-Built Description:*

CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided.

- *Proposed Solution:*

Provide compliant parking signage that includes fine information.

PCODE **EA04G**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.6.2**

Mitigated:

○ YES

◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

847

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **65.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Septic Dump

Cross Slope

848

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

12 SF $75 **$900**

○ Staff Only

Priority 1

Severity 3

Pcode clear floor space. 3.3%. This is a dump where septic pumping trucks come to dump waste. The employees of this facility leave the lid open during dumping hours so reach ranges do not apply.

Minimum Number

849

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

- ***Notes:***

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:

○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1

Severity 3

Trucks from various porta potty and septic pumping companies come here to dump.

Conceptual Costs for **Floor:** On-site **$16,974.00**

Facility: **Wastewater Treatment Plant** Part: **Exterior** Floor: **On-site**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$16,974.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Alarm Signal

837

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 4
Severity 3

Carpet/Doormat

836

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

- ***Notes:***

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

30 JOB $225 **$6,750**

⊗ Staff Only

Priority 2
Severity 3

Occurs in exit routes.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

824

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:

○ YES
◉ NO

20 JOB $450 **$9,000**

⊗ Staff Only

Priority 2

Severity 3

Door Stopper

825

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:

○ YES
◉ NO

20 JOB $75 **$1,500**

⊗ Staff Only

Priority 2

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

826 • *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

• *As-Built:* **50.5" high**

• *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

• ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

50 JOB $900 **$45,000**

⊗ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Signage

827 • *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

• *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

20 JOB $270 **$5,400**

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Lobby

Carpet/Doormat

790

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

2 JOB $225 **$450**

○ Staff Only

Priority 1
Severity 3

Door Swing

830

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **14.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Lobby Restrooms

Restroom

791

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **64.0" x 72.5 wide**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

- ***Notes:***

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

○ Staff Only

Priority 3

Severity 2

There are 2 of these restrooms that are the same size. These restrooms may not be large enough to be accessible. The staff restroom appears large enough to be accessible.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Lab

Desk

793

- *As-Built Description:*

Accessible fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **24.0" knee clearance**
- *Proposed Solution:*

Remove skirt.

PCODE **IN02**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1 & 902.3**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $750 **$750**

⊗ Staff Only

Priority 4
Severity 2

Lab

792

- *As-Built Description:*

Minimum of one non-fixed station per lab not provided at specialized laboratory equipment (height between 28" and 34", with leg room 27" high x 30" wide x 19" deep). (CA Only)

- *As-Built:* **36.0" to top**
- *Proposed Solution:*

Remodel existing cabinet/counter to provide lab/studio equipment for disabled person.

PCODE **LB01A**
CBC 2007 **1106B.2**
CBC 2019 **11B-805.7**

Mitigated:
○ YES
◉ NO

1 JOB $3,600 **$3,600**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Emergency Shower

Cross Slope

794

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.5%**

0.5" level change

- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

12 SF $75 **$900**

⊗ Staff Only

Priority 4

Severity 3

Door

802

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **4.3%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 SF $120 **$120**

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
799	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **56.0" high** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 2

Severity 2

Door has an exit sign but not illuminated so it may possibly not be an exit. There is a 4.5" level change on the exterior landing.

Door Threshold

800	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.6"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 4

Severity 4

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
801	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **4.5"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 4

Severity 1

Reach Range

795	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **62.0" high** • *Proposed Solution:* Add additional shore pull.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Restroom

Accessories

804

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 60.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 1

805

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 50.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
806	• *As-Built Description:* Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control. • *As-Built:* **SD: 48.0" high** • *Proposed Solution:* Relocate existing restroom accessories. • ***Notes:***	*PCODE* **WG01A** *ADAAG 91* **4.23.7** *ADA 2010* **308.2.1** *CBC 2007* **1115B.8.3** *CBC 2019* **11B-603.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

⊗ Staff Only

Priority 3

Severity 2

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

812	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **11.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

⊗ Staff Only

Priority 3

Severity 4

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
810	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **47.5" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

⊗ Staff Only

Priority 3

Severity 3

Clear Floor Space

798	• *As-Built Description:* Clear space has slopes greater than 1:48. • *Proposed Solution:* Modify surface and/or adjust drain. • ***Notes:***	*PCODE* **NI07** *ADAAG 91* **16.6.6** *ADA 2010* **305.2** *CBC 2007* **1132B.1** *CBC 2019* **11B-305.2** **Mitigated:** ○ YES ◉ NO	1	SF	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

3.9% slope within WC clear space.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

813

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 3
Severity 2

Door Hardware

796

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

⊗ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Lavatory					
808	• *As-Built Description:* Lavatory: Fixture rim or counter height more than 34" above floor. • *As-Built:* **36.5" high** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed.	*PCODE* **WD02** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,600	**$3,600**
809	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

⊗ Staff Only

Priority 3

Severity 4

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

807

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0” at 60.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 3
Severity 3

Signage

797

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled or radiused. 65.0” high**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

⊗ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Toilet Stall					
803	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **48.0" to water pipe Protrudes 4.0"** • *Proposed Solution:* Remove water pipe.	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$600	**$600**

⊗ Staff Only

Priority 3

Severity 1

	Water Closet					
811	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **15.0"** • *Proposed Solution:* Raise accessible water closet.	*PCODE* **WB08** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Locker Room

Door

832

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 3
Severity 2

Door Swing

816

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove or relocate locker.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 3
Severity 2

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
817	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **11.5”** • *Proposed Solution:* Remove or relocate locker.	*PCODE* **ID23A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

831	• *As-Built Description:* Latch approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 24" x 48" or 54" if door has closer (CA only: door width plus 24" x 60"). • *As-Built:* **47.0” with closer.** • *Proposed Solution:* Remove/relocate wall.	*PCODE* **ID27** *ADAAG 91* **Fig. 25(c)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(c)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Locker Facilities

814

- *As-Built Description:*

No section of bench provided adjacent to designated accessible locker, measuring minimum 20-24" deep, 48" wide, and 17-19" high, and fixed to a wall along the longer dimension.

- *Proposed Solution:*

Provide a new bench, fixed to a wall along the longer dimension, close to the accessible locker.

PCODE **GG03**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $2,250 **$2,250**

⊗ Staff Only

Priority 3

Severity 3

Shower

815

- *As-Built Description:*

Shower not accessible; multiple compliance violations.

- *As-Built:* **34.0" long x 33.0" wide**
- *Proposed Solution:*

Provide accessible shower.

PCODE **WF01**
ADAAG 91 **4.21**
ADA 2010 **608.1**
CBC 2019 **11B-608.1**

Mitigated:
○ YES
◉ NO

1 JOB $12,000 **$12,000**

⊗ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Breakroom

Door Hardware

822 • *As-Built Description:*

Door does not have accessible operating hardware.

• *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:

○ YES
◉ NO

1 JOB $450 **$450**

⊗ Staff Only

Priority 2

Severity 3

Door Swing

821 • *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

• *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
823	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **2.0"** • *Proposed Solution:* Provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID23B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

⊗ Staff Only

Priority 2

Severity 2

Non-Fixed Desk

820	• *As-Built Description:* Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided. • *As-Built:* **26.0" knee high** • *Proposed Solution:* Provide table or desk with accessible dimensions when purchasing new furniture.	*PCODE* **IN02A** *ADAAG 91* **4.32.3 & .4** *ADA 2010* **306.1** *CBC 2007* **1122B.3 & 4** *CBC 2019* **11B-306.1 & 11B-902.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,800	**$4,800**

⊗ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

819

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **36.0" high obstruction**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 4

828

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **60.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Sink

818

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **35.5" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

⊗ Staff Only

Priority 2
Severity 4

Telephone

829

- *As-Built Description:*

Telephone: Clear floor space, 30" wide x 48" out from wall, not provided.

- *As-Built:* **24.0" to table**
- *Proposed Solution:*

Provide clear space in front of telephone, 30" wide x 48" out from wall. Relocate existing furniture.

PCODE **IB01**
ADAAG 91 **4.31.2**
ADA 2010 **704.2.1**
CBC 2007 **1117B.2.2**
CBC 2019 **11B-704.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Exit Corridor

Door Swing

835

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **10.0" deep alcove.**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

- ***Notes:***

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 1
Severity 4

This corridor is staff only and this door exits through an equipment room.

General Note

834

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:
○ YES
◉ NO

1 JOB

○ Staff Only

Priority 1
Severity 2

Latch on exit door. Door opens inward.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

833

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Shelf: 6.0” at 37.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Laundry/Break Room

Door Threshold

842

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **4.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

2 JOB $1,200 **$2,400**

⊗ Staff Only

Priority 4
Severity 1

Non-Fixed Desk

841

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **15.0" deep**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

⊗ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

839

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **PTD: 57.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 4
Severity 4

840

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **35.5" high obstruction**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
838	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **35.5" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Storage/Maintenance

Door

844

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **5.0%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

⊗ Staff Only

Priority 4
Severity 3

Consider whether 203.5 applies.

Door Threshold

843

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **2.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

- ***Notes:***

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

⊗ Staff Only

Priority 4
Severity 2

Consider whether 203.5 applies.

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
845	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **17.0%** **33" wide** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less. • ***Notes:***	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	30	SF	$75	**$2,250**

⊗ Staff Only

Priority 4

Severity 2

Consider whether 203.5 applies.

Conceptual Costs for **Floor:** First Floor **$255,075.00**

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$255,075.00**

Facility: **Wastewater Treatment Plant** Part: **Interior** Floor: **First Floor**

Address: **13048 Road 21 1/2** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Wastewater Treatment Plant					**$272,049.00**

Access Compliance Survey Report

Madera Municipal Golf Course

23200 Avenue 17

Facility #: 48

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Reach Range

1208

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **54.0” high**
  20.0” deep side reach.
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:

○ YES
◉ NO

15 JOB $300 **$4,500**

○ Staff Only

Priority 2

Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking Southwest

Changes in Level

1164

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 LF $150 **$1,200**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

1166

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **11.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

No domes. Extends into vehicular way.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1167	• *As-Built Description:* Less than 48" level space at top and 1:12 flared sides not provided. • *As-Built:* **36.0"** • *Proposed Solution:* Demolish existing and provide new curb ramp. • ***Notes:*** **No domes. 0.75" level change. 25.0% flares.**	*PCODE* **EH05B** *ADAAG 91* **4.7.5; Fig.12(a)** *ADA 2010* **406.4** *CBC 2007* **1127B.5.4** *CBC 2019* **11B-406.5.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 3

Detectable Warning

1163	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	10	LF	$81	**$810**

○ Staff Only

Priority 1

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1165	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area. • ***Notes:***	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	10	LF	$81	**$810**

○ Staff Only

Priority 1

Severity 3

This appears to be a curb cut but not a curb ramp and also appears to be a golf cart passage. Verify intent.

Floor or Ground Surfaces

1159	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *Proposed Solution:* Modify slope at accessible parking space. • ***Notes:***	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	144	SF	$36	**$5,184**

○ Staff Only

Priority 1

Severity 3

Multiple compliance issues at accessible parking. Noncompliant slopes, striping, stall and or aisle size and signage.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

1161

• *As-Built Description:*

At parking lot with 76-100 spaces, the number of accessible spaces is less than required by code; 4 spaces required.

• *Proposed Solution:*

Provide required accessible parking spaces with signs including a minimum of one van space.

PCODE **EA01D**
ADAAG 91 **4.1.2(5)***
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

4 JOB $1,800 **$7,200**

○ Staff Only

Priority 1
Severity 2

Parking

1160

• *As-Built Description:*

Disabled persons must wheel or walk behind parked car(s) other than their own.

• *Proposed Solution:*

Relocate parking and provide curb ramp to accessible route.

PCODE **EA03**
ADAAG 91 **Fig.9**
ADA 2010 **502.3**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.7.1**

Mitigated:
○ YES
◉ NO

1 JOB $2,190 **$2,190**

○ Staff Only

Priority 1
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1162

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *As-Built:* **Cross slopes at 6.0%**
- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

- ***Notes:***

PCODE **SA01**
ADAAG 91 **4.1.2(7)(c)**
ADA 2010 **216.6**
CBC 2007 **1117B.5.8.1.2**
CBC 2019 **11B-216.6**

Mitigated:

○ YES
◉ NO

1 JOB $690 **$690**

○ Staff Only

Priority 1

Severity 3

Approximately 1000 SF of noncompliant slope and/or cross slopes occur from here to the entrance.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Parking North

Curb Ramp

1170

- *As-Built Description:*

Less than 48" level space at top and 1:12 flared sides not provided.

- *As-Built:* **35"**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH05B**
ADAAG 91 **4.7.5; Fig.12(a)**
ADA 2010 **406.4**
CBC 2007 **1127B.5.4**
CBC 2019 **11B-406.5.3**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

No domes. Lip at gutter. 35.0% flares.

Floor or Ground Surfaces

1168

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *Proposed Solution:*

Modify slope at accessible parking space.

- ***Notes:***

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

468 SF $36 **$16,848**

○ Staff Only

Priority 1
Severity 3

Multiple compliance issues at accessible parking. Noncompliant slopes, striping, stall and or aisle size and signage.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking					
1169	• *As-Built Description:* Disabled persons must wheel or walk behind parked car(s) other than their own. • *Proposed Solution:* Relocate parking and provide curb ramp to accessible route.	*PCODE* **EA03** *ADAAG 91* **Fig.9** *ADA 2010* **502.3** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.7.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,190	**$2,190**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Parking Northeast

Curb Ramp

1172

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

- ***Notes:***

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

This curb ramp projects into the vehicular way. Built-up curb ramp not allowed on access aisle.

1171

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.2% at curb ramp**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Multiple compliance issues at accessible parking. Noncompliant slopes, striping.

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Minimum Number

1174

- *As-Built Description:*

At parking lot with 76-100 spaces, the number of accessible spaces is less than required by code; 4 spaces required.

- *As-Built:* **100 spaces. 3 accessible provided.**
- *Proposed Solution:*

Provide required accessible parking spaces with signs including a minimum of one van space.

PCODE **EA01D**
ADAAG 91 **4.1.2(5)***
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 2

Parking Signage

1175

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.8.2**

Mitigated:
○ YES
◉ NO

2 JOB $975 **$1,950**

○ Staff Only

Priority 1
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1173	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$82,272.00**

Facility: **Madera Municipal Golf Course** Part: **Exterior** Floor: **On-site**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$82,272.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

1073

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

20 JOB $225 **$4,500**

○ Staff Only

Priority 2
Severity 3

Door Closer

1075

- *As-Built Description:*

Excessive force required to open door.

- *As-Built:* **1.5 seconds**
- *Proposed Solution:*

Adjust regular door closer to accessible standards (5 lbs. max).

PCODE **ID03**
ADAAG 91 **4.13.11**
ADA 2010 **404.2.9**
CBC 2007 **1133B.2.5**
CBC 2019 **11B-404.2.9**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 2

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

1245

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority ***1***

0

The course provides carts to the public but there are no accessible golf carts available. Consider providing accessible carts.
The course connects accessible elements to each other via a golf cart passage but the passage contains slopes, cross slopes and level changes that make the route inaccessible to wheelchairs. Consider accessible golf carts that hold wheelchairs in order for wheelchair users to get out of the carts and use the restrooms.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Pro Shop

Changes in Level

1074

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

5 SF $63 **$315**

○ Staff Only

Priority 4
Severity 3

Door Swing

1076

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **53.0”**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Public Counter

1071

- *As-Built Description:*

Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided.

- *As-Built:* **41.5" high**
- *Proposed Solution:*

Retrofit existing counter to provide accessible section.
Interim solution: Provide auxiliary counter, table, or clipboard.

PCODE **IN03**
ADAAG 91 **7.2(2)**
ADA 2010 **904.4**
CBC 2007 **1122B.4**
CBC 2019 **11B-904.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 4
Severity 3

Signage

1072

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Vending Machine

1077

- *As-Built Description:*

Vending machine coin slot or dispensing outlet, more than 48" above the floor.

- *As-Built:* **11.0" and 53.0" high**
- *Proposed Solution:*

Advise vendor/leasing company to provide accessible vending machine with highest operable part at 48" max.

- ***Notes:***

PCODE **IL02**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **1126B**
CBC 2019 **11B-308.2.1**

Mitigated:

○ YES
◉ NO

1 REF

○ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor and/or CBC if altered or constructed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Pro Shop Women's Restroom

Accessible Compartment

1088

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **12.0"**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig.**
ADA 2010 **30(a)**
604.8.1.2
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 2

Accessories

1082

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 56.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1093	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **14.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 4

Severity 3

Bench

1080	• *As-Built Description:* Clear floor space to allow parallel transfer onto bench not provided. • *Proposed Solution:* Remodel dressing room to provide 30" x 48" alongside bench.	*PCODE* **RE04B** *ADAAG 91* **4.35.4** *ADA 2010* **803.4** *CBC 2007* **1117B.8** *CBC 2019* **11B-803.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 4

Severity 2

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Coat Hook					
1089	• *As-Built Description:* Accessible coat hook not within reach range. • *As-Built:* **67.0" high** • *Proposed Solution:* Adjust existing or provide new coat hook at maximum 48" height.	*PCODE* **WG03A** *ADAAG 91* **4.2.5** *ADA 2010* **603.4** *CBC 2007* **1118B.5** *CBC 2019* **11B-603.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
	Door					
1078	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.3%** **1/4" level change** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	5	SF	$120	**$600**

○ Staff Only

Priority 4

Severity 1

○ Staff Only

Priority 4

Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1094	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **48.0" high** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Door Threshold

1079	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.6"** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1090

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 52.5"**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 4
Severity 4

1091

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **1.3"**
- *Proposed Solution:*

Raise the grab bar.

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1092	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 5.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 4

Severity 4

Lavatory

1083	• *As-Built Description:* Lavatory: Fixture rim or counter height more than 34" above floor. • *As-Built:* **35" high** • *Proposed Solution:* Provide new accessible lavatory. Remodel restroom as needed. • ***Notes:*** **No knee clearance.**	*PCODE* **WD02** *ADAAG 91* **4.19.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$10,200	**$10,200**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Locker Facilities

1081

- *As-Built Description:*

No section of bench provided adjacent to designated accessible locker, measuring minimum 20-24" deep, 48" wide, and 17-19" high, and fixed to a wall along the longer dimension.

- *As-Built:* **18.0" deep**
- *Proposed Solution:*

Provide a new bench, fixed to a wall along the longer dimension, close to the accessible locker.

PCODE **GG03**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $2,250 **$2,250**

○ Staff Only

Priority 4

Severity 3

Signage

1095

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 4

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1096	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 4

Severity 3

Stall Door

1085	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 4

Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1086	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 3

Toilet Stall

1084	• *As-Built Description:* Less than 59" from back wall to front wall or door swing of toilet stall, or less than 56" if water closet is wall-hung. • *As-Built:* **49.5”** • *Proposed Solution:* Provide new enclosure at existing water closet fixture.	*PCODE* **WB03** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.4.3** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 4

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1087	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **55.3" to 59.0" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Pro Shop Men's Restroom

Accessories

1106

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 65.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 1

1107

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **Hand dryer: 51.5" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 2

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1112	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **10.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 4

Severity 4

Bench

1102	• *As-Built Description:* Clear floor space to allow parallel transfer onto bench not provided. • *Proposed Solution:* Remodel dressing room to provide 30" x 48" alongside bench.	*PCODE* **RE04B** *ADAAG 91* **4.35.4** *ADA 2010* **803.4** *CBC 2007* **1117B.8** *CBC 2019* **11B-803.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 4

Severity 2

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Coat Hook					
1111	• *As-Built Description:* Accessible coat hook not within reach range. • *As-Built:* **67.5" high** • *Proposed Solution:* Adjust existing or provide new coat hook at maximum 48" height.	*PCODE* **WG03A** *ADAAG 91* **4.2.5** *ADA 2010* **603.4** *CBC 2007* **1118B.5** *CBC 2019* **11B-603.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
	Door					
1099	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **4.0%** **0.2" level change** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	5	SF	$120	**$600**

○ Staff Only

Priority 4

Severity 1

○ Staff Only

Priority 4

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1100	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **48.0" high** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Grab Bars

1113	• *As-Built Description:* Grab bars not provided or are not code compliant. • *Proposed Solution:* Provide accessible grab bars.	*PCODE* **WB07** *ADAAG 91* **4.17.6** *ADA 2010* **604.5** *CBC 2007* **1115B.4.1.3** *CBC 2019* **11B-604.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 4

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1104

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **34.6" high**
- *Proposed Solution:*

Remount compliant fixture at accessible height.

PCODE **WD02A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 4
Severity 4

Lavatory

1105

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **27.0"**
- *Proposed Solution:*

Provide new accessible lavatory. Remodel restroom as needed.

- ***Notes:***

PCODE **WD03**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $10,200 **$10,200**

○ Staff Only

Priority 4
Severity 2

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Locker Facilities

1103

- *As-Built Description:*

No section of bench provided adjacent to designated accessible locker, measuring minimum 20-24" deep, 48" wide, and 17-19" high, and fixed to a wall along the longer dimension.

- *As-Built:* **18.0" deep**
- *Proposed Solution:*

Provide a new bench, fixed to a wall along the longer dimension, close to the accessible locker.

PCODE **GG03**
ADAAG 91 **4.35.4**
ADA 2010 **803.4**
CBC 2007 **1117B.8**
CBC 2019 **11B-803.4**

Mitigated:
○ YES
◉ NO

1 JOB $2,250 **$2,250**

○ Staff Only

Priority 4
Severity 3

Protrusion Limits

1101

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Hand dryer: 6.5" at 53.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface. Option to install new hand dryer with depth less than 4".

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1097

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 4
Severity 3

1098

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 4
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
1110	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**
		○ Staff Only				
		Priority 4 ***Severity*** 4				
	Toilet Stall					
1109	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **59.0" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**
		○ Staff Only				
		Priority 4 ***Severity*** 4				

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Urinal

1108

- *As-Built Description:*

36" wide clearance in front of accessible urinal not provided when walls or partitions project more than 24" from the front edge of 30" x 48" clear space.

- *Proposed Solution:*

Provide 36" clear floor space in front of accessible urinal. Remodel restroom as needed.

- ***Notes:***

PCODE **WE04A**
ADAAG 91 **4.18.3**
ADA 2010 **605.3**
CBC 2007 **1115B.4.2.3**
CBC 2019 **11B-605.3**

Mitigated:

○ YES
◉ NO

1 JOB $4,500 **$4,500**

○ Staff Only

Priority 4

Severity 2

Alcove 30.0” x 60.0” deep.

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Golf Cart Storage and Maintenance

Door

1114

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.4%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

5 SF $120 **$600**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Superintendent Office

Door

1115

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **17.0%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

30 SF $120 **$3,600**

○ Staff Only

Priority **2**

Severity **1**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Women's Restroom Restaurant

Accessories

1119

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 45.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1120

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 49.5" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Coat Hook

1122

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **67.5" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Door Swing

1123

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **47.0"**
- *Proposed Solution:*

Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1127

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.5" on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

Lavatory

1118

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **35.5" high**
- *Proposed Solution:*

Provide new accessible lavatory counter.

- ***Notes:***

No knee clearance.

PCODE **WD02**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $10,200 **$10,200**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1121

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0” at 50.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Signage

1116

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1117	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not contrast** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Stall Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1124	• *As-Built Description:* Stall door to accessible compartment not self closing. • *Proposed Solution:* Adjust closer.	*PCODE* **WB05B** *ADAAG 91* **4.22.4** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.4** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$75	**$75**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1125	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1126	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **58.5" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**

○ Staff Only

Priority 3

Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1128	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Men's Restroom Restaurant

Accessories

1131

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 54.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

1134

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 41.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Coat Hook

1136

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **67.5" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Door Swing

1139

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **47.0"**
- *Proposed Solution:*

Install lower profile water closet or provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1142

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 53.5”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 4

1141

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.25” on wide side**
- *Proposed Solution:*

Relocate water closet.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1133

- *As-Built Description:*

Lavatory: Fixture rim or counter height more than 34" above floor.

- *As-Built:* **35.75" high**
- *Proposed Solution:*

Provide new accessible lavatory counter.

- ***Notes:***

PCODE **WD02**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $10,200 **$10,200**

○ Staff Only

Priority 3
Severity 4

No knee clearance.

Protrusion Limits

1132

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0" at 54.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1129

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1130

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not contrast and glare.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
1137	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 3				
	Toilet Stall					
1138	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **58.5" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 4				

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Urinal

1135

- *As-Built Description:*

Fixture mounted with rim more than 17" above floor.

- *As-Built:* **17.3" high**
- *Proposed Solution:*

Provide accessible urinal. Remodel restroom as needed.

PCODE **WE02**
ADAAG 91 **4.18.2**
ADA 2010 **605.2**
CBC 2007 **1115B.4.2.1**
CBC 2019 **11B-605.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,200 **$7,200**

○ Staff Only

Priority 3
Severity 4

Water Closet

1140

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **19.75" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Restaurant

Access Route

1156

- *As-Built Description:*

Access route, for occupant load less than 10, less than 36" wide.

- *As-Built:* **Down to 27.0"**
- *Proposed Solution:*

Modify equipment layout as needed to provide required access route.

- ***Notes:***

PCODE **IH03A**
ADAAG 91 **4.3.3**
ADA 2010 **403.5.1**
CBC 2007 **1133B.3.1**
CBC 2019 **11B-403.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 2
Severity 3

Occurs throughout workstations.

Door

1150

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

4 JOB $7,500 **$30,000**

⊗ Staff Only

Priority 2
Severity 2

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1144	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.0%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	10	SF	$120	**$1,200**
1145	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **5.0%** **0.5" level change** • *Proposed Solution:* Modify surface slope at door. • ***Notes:***	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	175	SF	$120	**$21,000**

○ Staff Only

Priority 2

Severity 4

○ Staff Only

Priority 2

Severity 3

Every exterior entrance door to the restaurant has slopes >2.1%.

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Pair

1149

- *As-Built Description:*

Pair of doors on accessible route has less than 32" clear opening width with one leaf open 90°.

- *As-Built:* **28.5" clear**
- *Proposed Solution:*

Provide new, wider door pair and frame with new accessible hardware.

PCODE **ID08**
ADAAG 91 **4.13.4**
ADA 2010 **404.2.2**
CBC 2007 **1133B.2.3.1**
CBC 2019 **11B-404.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,200 **$7,200**

⊗ Staff Only

Priority 3
Severity 3

Door Stopper

1143

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Threshold					
1146	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **1.0"** • *Proposed Solution:* Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 2

Severity 4

1147	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **1.0"** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

1157

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.25 high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 2
Severity 3

Protrusion Limits

1151

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **FE cabinet: 5.0" at 39.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1152

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **50.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

1158

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **60.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Seating

1148

- *As-Built Description:*

At counter or bar where food or drink is served, min. 60" of accessible counter ,or accessible table seating within same area, not provided.

- *Proposed Solution:*

Provide accessible section (60" minimum length at max. 34" height, with min. 27" knee space) at counter.

- ***Notes:***

PCODE **FC04**
ADAAG 91 **5.2**
ADA 2010 **226.1**
CBC 2007 **1104B.5.4**
CBC 2019 **11B-226.3**

Mitigated:
○ YES
◉ NO

1 JOB $9,900 **$9,900**

○ Staff Only

Priority 2
Severity 3

No 60.0" wide section at bar.

Signage

1153

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 2
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1154	• *As-Built Description:* At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT" sign at door.	*PCODE* **SA10A** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	13	JOB	$270	**$3,510**
1155	• *As-Built Description:* At door leading into exit corridor: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT ROUTE" sign at door.	*PCODE* **SA10D** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	2	JOB	$270	**$540**

○ Staff Only

Priority 2

Severity 3

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Maintenance

Electrical

1177

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **49.0" to 50.0" to top of box**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Minimum Number

1178

- *As-Built Description:*

At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required

- *Proposed Solution:*

Provide required accessible parking space with sign including a minimum of one van space.

PCODE **EA01A**
ADAAG 91 **4.1.2(5)**
ADA 2010 **208.2**
CBC 2007 **Tbl. 11B-6**
CBC 2019 **11B-208.2 Tbl. 11B-208.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

⊗ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

1179

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **8 seats in break area, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

⊗ Staff Only

Priority 4
Severity 2

Restroom

1176

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **110.0” x 100**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

- ***Notes:***

Includes shower.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

1 JOB $90,000 **$90,000**

⊗ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Southwest Women's Restroom

Accessories

1187

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 51.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1189

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 64.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 1

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1193	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **9.5" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**
1188	• *As-Built Description:* Bottom of flat, not tilted mirror not located above lavatories or countertops mounted with bottom edge more than 35" above floor or top edge less than 74" above floor. • *As-Built:* **58.0" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03B** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1243

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.5" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

Door Swing

1181

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **38.0"**
- *Proposed Solution:*

Relocate door frame.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

1182

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 3
Severity 4

Golf Facilities

1180

- *As-Built Description:*

Golf car passages are less than 48" min.

- *Proposed Solution:*

Remodel golf car passages to be a min. of 48".

- ***Notes:***

PCODE **NF21**
ADA 2010 **1006.3.1**
CBC 2019 **11B-1006.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 2

41.0” wide golf cart passage. Widen space between bollards.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1194

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 52.5”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 4

1192

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 21.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1185

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **15.0" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:

○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Lavatory

1186

- *As-Built Description:*

Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided.

- *As-Built:* **25.5" knee high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

PCODE **WD04A**
ADAAG 91 **Fig. 31**
ADA 2010 **306.3.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-306.3.3**

Mitigated:

○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1183

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1184

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **61.5" high o.c.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1190

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **21.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

1191

- *As-Built Description:*

Height of water closet seat less than 17" or more than 19" from floor.

- *As-Built:* **16.0" high**
- *Proposed Solution:*

Provide riser toilet seat (CA only: in alterations, riser seat may not be higher than 2").

PCODE **WB08A**
ADAAG 91 **4.16.3**
ADA 2010 **604.4**
CBC 2007 **1115B.4.1.4**
CBC 2019 **11B-604.4**

Mitigated:
○ YES
◉ NO

1 JOB $240 **$240**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Southwest Men's Restroom

Accessories

1201

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 50.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

1202

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 59.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1206	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **11.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1244	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **48.5" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1195

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **38.5"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3

Severity 3

Door Threshold

1196

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1207

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 53.0”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 4

1205

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 19.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1199

- *As-Built Description:*

Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided.

- *As-Built:* **26.2" knee high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

PCODE **WD04A**
ADAAG 91 **Fig. 31**
ADA 2010 **306.3.3**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-306.3.3**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 2

Protrusion Limits

1203

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 9.0" at 53.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1197

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1198

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **63.0" high o.c.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

1200

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **58.0" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Water Closet

1204

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **21.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Northeast Men's Restroom

Accessories

1218

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 45.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

1222

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **PTD: 51.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1215	• *As-Built Description:* Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet). • *As-Built:* **11.0" in front.** • *Proposed Solution:* Relocate or provide new toilet paper dispenser.	*PCODE* **WG02** *ADAAG 91* **4.16.6** *ADA 2010* **604.7** *CBC 2007* **1115B.8.4** *CBC 2019* **11B-604.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Door

1210	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **5.0%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1225	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **48.0" high** • *Proposed Solution:* Relocate or replace existing hardware. • ***Notes:***	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Door Swing

1209	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **38.0"** • *Proposed Solution:* Provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

○ Staff Only

Priority 3

Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

1211

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 3
Severity 4

Grab Bars

1213

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 21.0” on wide side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1217	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 4.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

1219	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **26.8" knee high** • *Proposed Solution:* Remount compliant fixture to accessible height.	*PCODE* **WD04A** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 2

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1220	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Protrusion Limits

1221	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **PTD: 9.0” at 54.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1226

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1227

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Toilet Stall

1223

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **58.5" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

1224

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **54.0"**
- *Proposed Solution:*

Remove adjacent fixture and provide new enclosure at accessible water closet.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

1212

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **20.0" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 3

1214

- *As-Built Description:*

Height of water closet seat less than 17" or more than 19" from floor.

- *As-Built:* **16.0" high**
- *Proposed Solution:*

Provide riser toilet seat (CA only: in alterations, riser seat may not be higher than 2").

PCODE **WB08A**
ADAAG 91 **4.16.3**
ADA 2010 **604.4**
CBC 2007 **1115B.4.1.4**
CBC 2019 **11B-604.4**

Mitigated:
○ YES
◉ NO

1 JOB $240 **$240**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1216	• *As-Built Description:* Flush Control: Operating handle not mounted toward wide side of stall. • *Proposed Solution:* Replace flush control with properly mounted accessible type, or install sensor flush.	*PCODE* **WB10** *ADAAG 91* **4.16.5** *ADA 2010* **604.6** *CBC 2007* **1115B.4.1.5** *CBC 2019* **11B-604.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Northeast Women's Restroom

Accessories

1238

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SCD: 45.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

1242

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **11.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door					
1230	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.9%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 4				
1233	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **48.5" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 3				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1232

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **38.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3

Severity 3

Door Threshold

1231

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **1.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1241

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 53.75”**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 4

1240

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 22.0” on wide side.**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1237	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **SCD: 3.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

1234	• *As-Built Description:* Knee clearance 27" min. high starting 8" back from the front edge of the lavatory towards the wall is not provided. • *As-Built:* **26.8" knee high** • *Proposed Solution:* Remount compliant fixture to accessible height.	*PCODE* **WD04A** *ADAAG 91* **Fig. 31** *ADA 2010* **306.3.3** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-306.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1235	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Signage

1228	• *As-Built Description:* Entrance to toilet or bathing facility not identified with ADAAG compliant signage. • *Proposed Solution:* Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).	*PCODE* **SA11A** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.8** *CBC 2019* **11B-216.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1229	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Toilet Stall

1236	• *As-Built Description:* 60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance). • *As-Built:* **59.75" to lavatory** • *Proposed Solution:* Relocate adjacent fixture and remodel restroom as needed. • ***Notes:***	*PCODE* **WB01A** *ADA 2010* **604.3.1; 604.3.2** *CBC 2007* **1115B.7.1.3** *CBC 2019* **11B-604.3.1; 11B-604.3.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
1239	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **20.5" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 3

Conceptual Costs for **Floor:** First Floor **$425,310.00**

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$425,310.00**

Facility: **Madera Municipal Golf Course** Part: **Interior** Floor: **First Floor**

Address: **23200 Avenue 17** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Madera Municipal Golf Course					**$507,582.00**

Access Compliance Survey Report

Intermodal Facility

123 North E Street

Facility #: 50

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Routes

Changes in Level

444

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" not properly beveled.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 LF $63 **$1,260**

○ Staff Only

Priority 1
Severity 4

Occurs between the curb and alighting area.

446

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

2 SF $63 **$126**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

445

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.1%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

100 SF $75 **$7,500**

○ Staff Only

Priority 1

Severity 4

449

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *Proposed Solution:*

Relocate existing newspaper stand at a location with compliant clear floor space.

PCODE **EF07NT**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

392

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

- ***Notes:***

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Multiple compliance issues.

Door

394

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.5%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
447	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **2.9%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**

○ Staff Only

Priority 1

Severity 4

Door Swing

448	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **21.0”** • *Proposed Solution:* Remove or relocate furniture or storage items.	*PCODE* **ID23A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
387	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **7.9%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	80	SF	$36	**$2,880**
						○ Staff Only
						Priority 1
						Severity 2
391	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **Up to 7.0%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	200	SF	$36	**$7,200**
						○ Staff Only
						Priority 1
						Severity 2

Facility: **Intermodal Facility** Part: **Exterior** Floor: **On-site**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Identification					
388	• *As-Built Description:* Sign for accessible parking space is missing or non-compliant. • *Proposed Solution:* Provide compliant parking signage. • ***Notes:***	*PCODE* **EA04B** *ADAAG 91* **4.6.4** *ADA 2010* **502.6** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$945	**$945**

○ Staff Only

Priority 1

Severity 4

Unreadable.

	Parking					
386	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

Facility: **Intermodal Facility** Part: **Exterior** Floor: **On-site**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
385	• *As-Built Description:* An accessible parking space shall be outlined or painted blue (required in CA only). • *Proposed Solution:* Identify accessible parking space using blue markings.	*PCODE* **EA04K** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$360	**$720**
393	• *As-Built Description:* Accessible parking space(s) not located close to the nearest possible entrance on an accessible route. • *Proposed Solution:* Relocate accessible parking space(s). • ***Notes:*** **Circuitous route to entrance.**	*PCODE* **EA06** *ADAAG 91* **4.6.2** *ADA 2010* **208.3** *CBC 2007* **1129B.1** *CBC 2019* **11B-208.3.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Facility: **Intermodal Facility** Part: **Exterior** Floor: **On-site**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
389	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area. • ***Notes:***	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**
	Color and size.					
390	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$39,606.00**

Facility: **Intermodal Facility** Part: **Exterior** Floor: **On-site**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$39,606.00**

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Door

398

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **45.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

3 JOB $7,500 **$22,500**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Door Threshold

396

- *As-Built Description:*

Existing threshold at door is 1/2" high or less but without a beveled edge on both sides.

- *Proposed Solution:*

Modify threshold to have beveled edge on each side.

PCODE **ID02**
ADAAG 91 **4.1.6(3)(d)(ii)**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

6 JOB $750 **$4,500**

○ Staff Only

Priority 2
Severity 3

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
430	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **0.75”** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	5	JOB	$1,200	**$6,000**

○ Staff Only

Priority 2

Severity 4

Electrical

442	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **48.0” to switch. 49.0” to top of box.** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height. • ***Notes:***	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 4

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Fire Alarm

397

- *As-Built Description:*

Fire alarm pull stations not 42"-48" from floor to center. Note: Required only at new construction, or where mounting location was or is to be remodeled.

- *As-Built:* **48.5" high**
- *Proposed Solution:*

Remount fire alarm station to be 42" min., and 48" max. from floor to center.

PCODE **IC03**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **907.4.2**
CBC 2019 **907.4.2.2**

Mitigated:
○ YES
◉ NO

3 JOB $825 **$2,475**

○ Staff Only

Priority 4

Severity 4

Signage

395

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

18 JOB $270 **$4,860**

○ Staff Only

Priority 2

Severity 3

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
443	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	5	JOB	$450	**$2,250**

○ Staff Only

Priority 2

Severity 4

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Breezeway

Cross Slope

384

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 6.1%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

130 SF $75 **$9,750**

○ Staff Only

Priority 1
Severity 3

Door

383

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 1
Severity 3

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
450	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **2.7%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	20	SF	$120	**$2,400**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Greyhound

Door Swing

401

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

- ***Notes:***

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

⊗ Staff Only

Priority 2
Severity 2

Door doesn't open 90. Exit door. Relocate shelf.

Protrusion Limits

400

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Shelf: 10.0" at 62.5" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 2

This is also within the door maneuvering clearance at an exit door.

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
399	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Service counter: 8.0” at 39.0” high** • *Proposed Solution:* Provide cane-detectable railing to mark area of low clearance.	*PCODE* **EG04A** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	12	LF	$300	**$3,600**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Women's Restroom Greyhound

Accessories

406

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.5" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 4

Coat Hook

415

- *As-Built Description:*

Accessible coat hook not within reach range.

- *As-Built:* **66.5" high**
- *Proposed Solution:*

Adjust existing or provide new coat hook at maximum 48" height.

PCODE **WG03A**
ADAAG 91 **4.2.5**
ADA 2010 **603.4**
CBC 2007 **1118B.5**
CBC 2019 **11B-603.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 3
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

403

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **46.5" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Door Swing

408

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **5.0"**
- *Proposed Solution:*

Change door swing.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 2

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
416	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *Proposed Solution:* Relocate dispenser.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 3

Severity 3

Grab Bars

413	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 20.0" on wide side.** • *Proposed Solution:* Provide new accessible rear grab bar. • ***Notes:***	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
412	• *As-Built Description:* Grab bars not at 33" to 36" from floor • *As-Built:* **32.75”** • *Proposed Solution:* Relocate accessible grab bars.	*PCODE* **WB07C** *ADAAG 91* **4.16.4** *ADA 2010* **609.4** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **& 2** **11B-609.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**
411	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **0.5 below the grab bar** • *Proposed Solution:* Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
414	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **1.25”** • *Proposed Solution:* Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

Lavatory

404	• *As-Built Description:* Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory). • *As-Built:* **15.0” o.c.** • *Proposed Solution:* Relocate existing lavatory. • ***Notes:***	*PCODE* **WD01A** *ADAAG 91* **4.19.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.3** *CBC 2019* **11B-606.2, 11B -606.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$2,700	**$2,700**

○ Staff Only

Priority 3

Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

405

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3

Severity 3

Protrusion Limits

407

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0” at 49.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3

Severity 3

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

402

- *As-Built Description:*

Sign does not have non-glare finish and/or good color contrast (dark on light or light on dark).

- *As-Built:* **Glare**
- *Proposed Solution:*

Provide compliant signage.

PCODE **SA03**
ADAAG 91 **4.30.5**
ADA 2010 **703.5.1**
CBC 2007 **1117B.5.5**
CBC 2019 **11B-216.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Toilet Stall

409

- *As-Built Description:*

Toilet stall less than 60" wide.

- *As-Built:* **59.5" wide**
- *Proposed Solution:*

Provide new accessible stall.

PCODE **WB06**
ADAAG 91 **4.17.3**
ADA 2010 **604.8.1.1**
CBC 2007 **1115B.3.1.4.1**
CBC 2019 **11B-604.8.1.1**

Mitigated:
○ YES
◉ NO

1 JOB $4,500 **$4,500**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Water Closet						
410	• *As-Built Description:* Height of water closet seat less than 17" or more than 19" from floor. • *As-Built:* **16.75" high** • *Proposed Solution:* Provide riser toilet seat (CA only: in alterations, riser seat may not be higher than 2").	*PCODE* **WB08A** *ADAAG 91* **4.16.3** *ADA 2010* **604.4** *CBC 2007* **1115B.4.1.4** *CBC 2019* **11B-604.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$240	**$240**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Men's Restroom Greyhound

Accessories

419

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 51.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

424

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **14.0" in front.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
428	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **40.5" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 4

Door Swing

423	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **15.0"** • *Proposed Solution:* Change door swing. • ***Notes:***	*PCODE* **ID23** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Arguably, the door swings into the urinal clear floor space.

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
418	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **34.5"** • *Proposed Solution:* Relocate trash can.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
429	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *Proposed Solution:* Provide door operator.	*PCODE* **ID24C** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$15,000	**$15,000**

○ Staff Only

Priority 3

Severity 2

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

427

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 20.0" on wide side.**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

425

- *As-Built Description:*

Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Relocate accessories/dispensers to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).

PCODE **WB07I**
ADAAG 91 **4.26.2**
ADA 2010 **609.3**
CBC 2007 **1133B.4.2.5**
CBC 2019 **11B-609.3**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Lavatory						
421	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Protrusion Limits						
420	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **PTD: 8.0” at 49.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

417

- *As-Built Description:*

Sign does not have non-glare finish and/or good color contrast (dark on light or light on dark).

- *As-Built:* **61.0". Glare.**
- *Proposed Solution:*

Provide compliant signage and install between 58"-60" on center.

PCODE **SA03**
ADAAG 91 **4.30.5**
ADA 2010 **703.5.1**
CBC 2007 **1117B.5.5**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Urinal

422

- *As-Built Description:*

36" wide clearance in front of accessible urinal not provided when walls or partitions project more than 24" from the front edge of 30" x 48" clear space.

- *Proposed Solution:*

Provide 36" clear floor space in front of accessible urinal. Remodel restroom as needed.

- ***Notes:***

Alcove 32.0" wide x 36.0" deep. Alter partition support.

PCODE **WE04A**
ADAAG 91 **4.18.3**
ADA 2010 **605.3**
CBC 2007 **1115B.4.2.3**
CBC 2019 **11B-605.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Water Closet

426

- *As-Built Description:*

Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18").

- *As-Built:* **18.5" o.c.**
- *Proposed Solution:*

Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.

- ***Notes:***

PCODE **WB02C**
ADAAG 91 **Fig. 28**
ADA 2010 **604.2**
CBC 2007 **1115B.4.1.1**
CBC 2019 **11B-604.2**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3

Severity 4

The 1991 ADAAG required dimension was absolute and may have complied with dimensional tolerance. Consider whether Safe Harbor applies.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Office and Restroom

Accessories

439

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

If 48" max AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" max AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

440

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 52.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

435

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 21.5" on wide side.**
- *Proposed Solution:*

Provide new accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Lavatory

436

- *As-Built Description:*

Clear floor space, 30" x 48" in front of fixture, extending 19" max. under the lavatory, not provided (CA only: Less than 18" from side wall to centerline of lavatory).

- *As-Built:* **15.5" o.c.**
- *Proposed Solution:*

Relocate existing lavatory.

- ***Notes:***

PCODE **WD01A**
ADAAG 91 **4.19.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.3**
CBC 2019 **11B-606.2, 11B -606.6**

Mitigated:
○ YES
◉ NO

1 JOB $2,700 **$2,700**

○ Staff Only

Priority 3
Severity 2

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Lavatory						
441	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**
Protrusion Limits						
433	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Shelf: 12.0” at 49.5” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

○ Staff Only

Priority 3

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
438	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **PTD: 8.0” at 54.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Public Counter

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
431	• *As-Built Description:* Service counter (stand-up): Accessible section min. 36" length and 36" max. height (in CA: 28" to 34" high) not provided. • *As-Built:* **42.0” high** • *Proposed Solution:* Retrofit existing counter to provide accessible section. Interim solution: Provide auxiliary counter, table, or clipboard.	*PCODE* **IN03** *ADAAG 91* **7.2(2)** *ADA 2010* **904.4** *CBC 2007* **1122B.4** *CBC 2019* **11B-904.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

432

- *As-Built Description:*

Sign does not have non-glare finish and/or good color contrast (dark on light or light on dark).

- *As-Built:* **Glare. Not beveled**
- *Proposed Solution:*

Provide compliant signage.

PCODE **SA03**
ADAAG 91 **4.30.5**
ADA 2010 **703.5.1**
CBC 2007 **1117B.5.5**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Toilet Stall

437

- *As-Built Description:*

60" min. clearance around a water closet measured perpendicular from the side wall not provided (Fixtures are not allowed to overlap this clearance).

- *As-Built:* **53.0" to lavatory**
- *Proposed Solution:*

Relocate adjacent fixture and remodel restroom as needed.

- ***Notes:***

PCODE **WB01A**
ADA 2010 **604.3.1; 604.3.2**
CBC 2007 **1115B.7.1.3**
CBC 2019 **11B-604.3.1; 11B-604.3.2**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Water Closet					
434	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **16.7" o.c.** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Conceptual Costs for **Floor:** First Floor **$115,905.00**

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$115,905.00**

Facility: **Intermodal Facility** Part: **Interior** Floor: **First Floor**

Address: **123 North E Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Intermodal Facility					**$155,511.00**

Access Compliance Survey Report

Parks Maintenance Office

40 W. Olive

Facility #: 51

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Parks Maintenance Office** Part: **Exterior** Floor: **On-site**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Route to Entrance

Detectable Warning

925

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

30 LF $81 **$2,430**

○ Staff Only

Priority 1
Severity 3

Floor or Ground Surface

927

- *As-Built Description:*

Walk: openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **8.0" x 10.0"**
- *Proposed Solution:*

Correct opening 1/2" max. along the line of traffic flow.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 SF $240 **$240**

○ Staff Only

Priority 1
Severity 2

Facility: **Parks Maintenance Office** Part: **Exterior** Floor: **On-site**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
928	• *As-Built Description:* Walk: opening greater than 1/2" along the line of traffic flow. • *As-Built:* **0.75”** • *Proposed Solution:* Correct opening 1/2" max. along the line of traffic flow.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	2	SF	$240	**$480**

○ Staff Only

Priority 1

Severity 2

Minimum Number

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
929	• *As-Built Description:* At parking lot with 1-25 spaces, the number of accessible spaces is less than required by code; 1 space required • *Proposed Solution:* Provide required accessible parking space with sign including a minimum of one van space. • ***Notes:*** **No accessible parking provided.**	*PCODE* **EA01A** *ADAAG 91* **4.1.2(5)** *ADA 2010* **208.2** *CBC 2007* **Tbl. 11B-6** *CBC 2019* **11B-208.2 Tbl. 11B-208.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 1

Severity 3

Facility: **Parks Maintenance Office** Part: **Exterior** Floor: **On-site**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
930	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$975	**$975**
	Protrusion Limits					
926	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **AC unit: 18.0" at 39.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 1

Conceptual Costs for **Floor:** On-site **$5,325.00**

Facility: **Parks Maintenance Office** Part: **Exterior** Floor: **On-site**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$5,325.00**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

924

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

2 JOB $225 **$450**

○ Staff Only

Priority 2
Severity 3

Door Clearance

922

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **29.5" clear**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

9 JOB $7,800 **$70,200**

⊗ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

918

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

7 JOB $450 **$3,150**

○ Staff Only

Priority 2
Severity 3

Door Threshold

920

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **Roughly 3.0”**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

- ***Notes:***

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

○ Staff Only

Priority 2
Severity 1

At all exterior doors.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

919 • *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

• *As-Built:* **49.0" to top of box**

• *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

• ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

6 JOB $900 **$5,400**

⊗ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

General Note

921 • *As-Built Description:*

Refer to notes for observation and recommendation.

• *Proposed Solution:*

• ***Notes:***

PCODE **GN01**

Mitigated:
○ YES
◉ NO

1 JOB

⊗ Staff Only

Priority 1
Severity 4

Steps are required to access the building interior, both entrances. No accessible route.

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stairways					
923	• *As-Built Description:* Exterior stair substantially out of compliance. • *Proposed Solution:* Provide complete new stair, 4 ft. wide with landing and handrails. • ***Notes:*** **Both front and back entrances.**	*PCODE* **EC09** *ADAAG 91* **4.9** *ADA 2010* **504** *CBC 2007* **1133B.4** *CBC 2019* **11B-504** **Mitigated:** ○ YES ◉ NO	60	IN	$270	**$16,200**

○ Staff Only

Priority 1

Severity 2

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Lobby

Door

907

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

908

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **54.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 1
Severity 2

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Door Swing					
909	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **6.0"** • *Proposed Solution:* Remove the door.	*PCODE* **ID23** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 3				
906	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *Proposed Solution:* Remove or relocate furniture or storage items.	*PCODE* **ID23A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 2				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Restroom

Door Swing

911

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **39.0”**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 3
Severity 3

Restroom

910

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **62.5” x 86.0”**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

1 JOB $90,000 **$90,000**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Conference Room

Door Swing

913

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **8.0”**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID23B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 2
Severity 3

Protrusion Limits

912

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Shelf: 11.0” at 71.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 1

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
914	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Drop box: 5.0” at 42.0” high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 2

Severity 4

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Breakroom

Reach Range

916

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **Obstructed by counter at 36.5”**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 4

917

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **SD: 51.0” high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

⊗ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
915	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.5" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

⊗ Staff Only

Priority 2

Severity 4

Conceptual Costs for **Floor:** First Floor **$214,500.00**

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$214,500.00**

Facility: **Parks Maintenance Office** Part: **Interior** Floor: **First Floor**

Address: **40 W. Olive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Parks Maintenance Office					**$219,825.00**

Access Compliance Survey Report

Westside Community Center

1124 W. Yosemite Avenue

Facility #: 56

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 General

Cross Slope

1745

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **7.8% and 2.0" level changes.**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

30 SF $75 **$2,250**

○ Staff Only

Priority 1
Severity 2

Door Hardware

1743

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

3 JOB $450 **$1,350**

○ Staff Only

Priority 2
Severity 3

Facility: **Westside Community Center** Part: **Exterior** Floor: **On-site**

Address: **1124 W. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Swing

1744

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **20.0" to rail**
- *Proposed Solution:*

Expand landing and reinstall railing.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 2
Severity 4

Door Threshold

1746

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **4.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

2 JOB $1,200 **$2,400**

○ Staff Only

Priority 2
Severity 1

Facility: **Westside Community Center** Part: **Exterior** Floor: **On-site**

Address: **1124 W. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Existing Facility

1742

- *As-Built Description:*

At time of survey, room was locked and could not be accessed.

- *Proposed Solution:*

Verify elements in room are compliant with ADA.

- ***Notes:***

PCODE **XA03**

CBC 2019 **11B-504.4.1**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

0

According to Nikki Rincon the building contains asbestos, is condemned and no one is allowed in the building.

General Note

1747

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES

◉ NO

1 JOB

○ Staff Only

Priority 1

0

No parking belongs to the facility. No accessible parking spaces.

Conceptual Costs for **Floor:** On-site **$12,000.00**

Facility: **Westside Community Center** Part: **Exterior** Floor: **On-site**

Address: **1124 W. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$12,000.00**

Facility: **Westside Community Center** Part: **Exterior** Floor: **On-site**

Address: **1124 W. Yosemite Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Westside Community Center					**$12,000.00**

Access Compliance Survey Report

Rotary Youth Hut

113 South Q. Street

Facility #: 56A

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Routes

Detectable Warning

964

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

20 LF $81 **$1,620**

○ Staff Only

Priority 1
Severity 3

Door

952

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 3

Facility: **Rotary Youth Hut** Part: **Exterior** Floor: **On-site**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
951	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **9.3%** • *Proposed Solution:* Modify surface slope at door. • ***Notes:***	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	30	SF	$120	**$3,600**

○ Staff Only

Priority 1

Severity 2

The slope is also noncompliant as a ramp.

Door Swing

954	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **22.0”** • *Proposed Solution:* Extend concrete.	*PCODE* **ID23A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
955	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *Proposed Solution:* Remove or relocate furniture or storage items.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 1

Severity 3

Door Threshold

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
953	• *As-Built Description:* Door inaccessible due to threshold or step at door exceeding 1/2". • *As-Built:* **2.0"** • *Proposed Solution:* Modify threshold.	*PCODE* **ID02A** *ADAAG 91* **4.13.8** *ADA 2010* **404.2.5** *CBC 2007* **1133B.2.4.1** *CBC 2019* **11B-404.2.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,200	**$1,200**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Identification

961

- *As-Built Description:*

Sign for accessible parking space is missing or non-compliant.

- *Proposed Solution:*

Provide compliant parking signage.

PCODE **EA04B**
ADAAG 91 **4.6.4**
ADA 2010 **502.6**
CBC 2007 **1129B.4**
CBC 2019 **11B-502.6**

Mitigated:
○ YES
◉ NO

2 JOB $945 **$1,890**

○ Staff Only

Priority 1
Severity 4

Parking

959

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **11.0' to 15.0'. Aisle is not even with space.**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

- ***Notes:***

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

2 JOB $600 **$1,200**

○ Staff Only

Priority 1
Severity 3

Occurs at both spaces.

Facility: **Rotary Youth Hut** Part: **Exterior** Floor: **On-site**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
960	• *As-Built Description:* The words "NO PARKING" not painted on the ground within loading and unloading access aisle (12" min high white letters), located so that it is visible to traffic enforcement officials (required in CA only). • *Proposed Solution:* Provide the words “NO PARKING” in each access aisle, painted in 12” high letters, when altering area.	*PCODE* **EA04D** *CBC 2007* **1129B.3.1** *CBC 2019* **11B-502.3.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
958	• *As-Built Description:* Wheel stops provided do not effectively prevent the encroachment of vehicles over the required clear width of an adjacent accessible route. • *Proposed Solution:* Adjust wheel stops to effectively prevent encroachment.	*PCODE* **EA04J** *CBC 2019* **11B-502.7.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Facility: **Rotary Youth Hut** Part: **Exterior** Floor: **On-site**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking Signage

963

- *As-Built Description:*

No "Tow Away" sign at parking lot entrance (required in CA only).

- *Proposed Solution:*

Provide "Tow Away" sign at parking lot entrance when altering area.

PCODE **EA04C**

CBC 2007 **1129B.4**

CBC 2019 **11B-502.8.2**

Mitigated:

○ YES

◉ NO

3 JOB $975 **$2,925**

○ Staff Only

Priority 1

Severity 4

Signage

962

- *As-Built Description:*

Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant.

- *Proposed Solution:*

Provide signage sufficient to guide persons to accessible entrances.

PCODE **SA01**

ADAAG 91 **4.1.2(7)(c)**

ADA 2010 **216.6**

CBC 2007 **1117B.5.8.1.2**

CBC 2019 **11B-216.6**

Mitigated:

○ YES

◉ NO

1 JOB $690 **$690**

○ Staff Only

Priority 1

Severity 3

Facility: **Rotary Youth Hut** Part: **Exterior** Floor: **On-site**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
957	• *As-Built Description:* Sign showing the International Symbol of Accessibility (ISA) not provided at all accessible building entrances. • *Proposed Solution:* Provide building entrance signage with ISA signage at accessible entrance. • ***Notes:***	*PCODE* **SA12A** *ADAAG 91* **28 CFR 35.163** *ADA 2010* **(b) 216.6** *CBC 2007* **1127B.3** *CBC 2019* **11B-216.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 1

Severity 3

No ISA at "accessible " door. Only applies if door is made accessible.

Walk

956	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **10.0%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less. Or install directional signage.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	50	SF	$75	**$3,750**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$18,900.00**

Facility: **Rotary Youth Hut** Part: **Exterior** Floor: **On-site**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$18,900.00**

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Alarm Signal

949

- *As-Built Description:*

At facility with a fire alarm system, visual signal (strobe) not provided at required type of common use area.

- *Proposed Solution:*

Provide combination visual / audible signal device connected to existing fire alarm system.

PCODE **IC05**
ADAAG 91 **4.1.3(14) &**
ADA 2010 **4.28.3**
215.1 & 702.1
CBC 2007 **1114B.2.2**
CBC 2019 **11B-215.1 & 11B-702.1**

Mitigated:
○ YES
◉ NO

1 JOB $1,200 **$1,200**

○ Staff Only

Priority 4
Severity 3

Signage

950

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

7 JOB $450 **$3,150**

○ Staff Only

Priority 2
Severity 4

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Vertical Clearance					
944	• *As-Built Description:* Overhead clearance less than 80" above finished floor. • *As-Built:* **77.0" high** • *Proposed Solution:* Raise the ceiling height.	*PCODE* **EG01A** *ADAAG 91* **4.4.2** *ADA 2010* **307.4** *CBC 2007* **1133B.8.6.2** *CBC 2019* **11B-307.4** **Mitigated:** ○ YES ◉ NO	50	LF	$2,400	**$120,000**

○ Staff Only

Priority 2

Severity 2

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Main Room

Door

941

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **9.3%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

5 SF $120 **$600**

○ Staff Only

Priority 2
Severity 2

936

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

3 JOB $900 **$2,700**

○ Staff Only

Priority 2
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
937	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **71.0" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 2

Severity 2

Door Clearance

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
938	• *As-Built Description:* Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open. • *As-Built:* **25.0" to 28.0" clear** • *Proposed Solution:* Provide new, larger door and frame with new accessible hardware. • ***Notes:***	*PCODE* **ID01** *ADAAG 91* **4.13.5** *ADA 2010* **404.2.3** *CBC 2007* **1133B.1.1.1.1** *CBC 2019* **11B-404.2.3** **Mitigated:** ○ YES ◉ NO	7	JOB	$7,800	**$54,600**

○ Staff Only

Priority 2

Severity 2

Includes rear exit doors.

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
939	• *As-Built Description:* Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open. • *As-Built:* **78.25" high** • *Proposed Solution:* Provide new, larger door and frame with new accessible hardware.	*PCODE* **ID01** *ADAAG 91* **4.13.5** *ADA 2010* **404.2.3** *CBC 2007* **1133B.1.1.1.1** *CBC 2019* **11B-404.2.3** **Mitigated:** ○ YES ◉ NO	5	JOB	$7,800	**$39,000**

○ Staff Only

Priority 2

Severity 4

Door Hardware

935	• *As-Built Description:* Door does not have accessible operating hardware. • *Proposed Solution:* Provide lever handle or other accessible hardware.	*PCODE* **ID07** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	9	JOB	$450	**$4,050**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Stopper

943

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

3 JOB $75 **$225**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Door Threshold

940

- *As-Built Description:*

Door inaccessible due to threshold or step at door exceeding 1/2".

- *As-Built:* **3.0"**
- *Proposed Solution:*

Modify threshold to be no more than 1/2" by removing existing paving at door and providing landing with edge ramping (slope 1:20 max).

PCODE **ID02A**
ADAAG 91 **4.13.8**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $1,200 **$3,600**

○ Staff Only

Priority 2
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Electrical

932

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **50.5" to top of box**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

933

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **14.0" to the high plug**
  11.0" to bottom of box
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 2010 CBC to the code cycle at the time of this survey.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

931

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **FE: 60.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 3

942

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **36.5" counter obstructed reach**
- *Proposed Solution:*

Remodel counter or place all items elsewhere.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Signage					
934	• *As-Built Description:* At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided. • *Proposed Solution:* Provide raised letter/Braille "EXIT" sign at door.	*PCODE* **SA10A** *ADAAG 91* **4.1.3(16)** *ADA 2010* **216.4.1** *CBC 2007* **1011.3** *CBC 2019* **11B-216.4.1** **Mitigated:** ○ YES ◉ NO	3	JOB	$270	**$810**

○ Staff Only

Priority 2

Severity 3

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Restroom

Restroom

945

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **76.0" x 93.0"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:

○ YES
◉ NO

1 JOB $90,000 **$90,000**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Kitchen

Door Swing

948

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **9.5”**
- *Proposed Solution:*

Remove door.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 3

Electrical

947

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **58.0” high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 4
Severity 3

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
946	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.5" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 4

Conceptual Costs for **Floor:** First Floor **$332,685.00**

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$332,685.00**

Facility: **Rotary Youth Hut** Part: **Interior** Floor: **First Floor**

Address: **113 South Q. Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Rotary Youth Hut					**$351,585.00**

Access Compliance Survey Report

Mexican-American Center

716 Columbia Ave

Facility #: 58

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Mexican-American Center** Part: **Exterior** Floor: **On-site**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Exterior

Cross Slope

168

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

160 SF $75 **$12,000**

○ Staff Only

Priority 1
Severity 3

Curb or Barrier

163

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

Facility: **Mexican-American Center** Part: **Exterior** Floor: **On-site**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

169

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Door

166

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
167	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **3.5%** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	25	SF	$120	**$3,000**

○ Staff Only

Priority 1

Severity 4

Floor or Ground Surfaces

170	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **3.7% on asphalt. 7% at gutter.** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	162	SF	$36	**$5,832**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Height

164

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **30.0" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

- ***Notes:***

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:

○ YES
◉ NO

60 LF $225 **$13,500**

○ Staff Only

Priority 1

Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012.

Protrusion Limits

160

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AC Unit: 10.0" at 74.0" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 1

Severity 2

Facility: **Mexican-American Center** Part: **Exterior** Floor: **On-site**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
161	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 2

Signage

159	• *As-Built Description:* Exterior signage at inaccessible entrances to provide direction to accessible entrances is missing or noncompliant. • *Proposed Solution:* Provide signage sufficient to guide persons to accessible entrances. • ***Notes:***	*PCODE* **SA01** *ADAAG 91* **4.1.2(7)(c)** *ADA 2010* **216.6** *CBC 2007* **1117B.5.8.1.2** *CBC 2019* **11B-216.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$690	**$690**

○ Staff Only

Priority 1

Severity 3

Place outside fence and at either end of alley.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Stairways

157

- *As-Built Description:*

Exterior stair substantially out of compliance.

- *As-Built:* **Uneven risers, handrails etc.**
- *Proposed Solution:*

Provide complete new stair, 4 ft. wide with landing and handrails.

PCODE **EC09**
ADAAG 91 **4.9**
ADA 2010 **504**
CBC 2007 **1133B.4**
CBC 2019 **11B-504**

Mitigated:
○ YES
◉ NO

40 IN $270 **$10,800**

○ Staff Only

Priority 1
Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Top and Bottom Extension at

162

- *As-Built Description:*

Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp.

- *Proposed Solution:*

Provide ramp handrail extension (cost for each extension piece).

PCODE **ED05**
ADAAG 91 **4.8.5(2)**
ADA 2010 **505.10.1**
CBC 2007 **1133B.4.2.2 &**
CBC 2019 **1133B.5.5.1**
11B-505.10.1

Mitigated:
○ YES
◉ NO

4 JOB $510 **$2,040**

○ Staff Only

Priority 1
Severity 4

Facility: **Mexican-American Center** Part: **Exterior** Floor: **On-site**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
165	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **36.0" wide** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	120	SF	$135	**$16,200**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$74,892.00**

Facility: **Mexican-American Center** Part: **Exterior** Floor: **On-site**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$74,892.00**

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Door

136

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *As-Built:* **8.0" high**
- *Proposed Solution:*

Provide 10" min. "kick plate" covering width of door when altering area.

PCODE **ID06**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 2
Severity 3

138

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

2 JOB $900 **$1,800**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Hardware

132

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

6 JOB $450 **$2,700**

○ Staff Only

Priority 2
Severity 3

Door Swing

135

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID24A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 3

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Threshold

143

- *As-Built Description:*

Existing threshold at door is 1/2" high or less but without a beveled edge on both sides.

- *As-Built:* **Not beveled properly.**
- *Proposed Solution:*

Replace threshold.

PCODE **ID02**
ADAAG 91 **4.1.6(3)(d)(ii)**
ADA 2010 **404.2.5**
CBC 2007 **1133B.2.4.1**
CBC 2019 **11B-404.2.5**

Mitigated:
○ YES
◉ NO

3 JOB $750 **$2,250**

○ Staff Only

Priority 2
Severity 1

Electrical

133

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **53.5" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

3 JOB $900 **$2,700**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

154

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **50 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

3 JOB $1,500 **$4,500**

○ Staff Only

Priority 2

Severity 2

Public Participation Counter

142

- *As-Built Description:*

Speaker podium is not accessible. Upper edge of podium is more than 34" above the finished floor, and knee space is less than 27" high, 30" wide, and 19" deep.

- *Proposed Solution:*

Provide additional, integrated, and accessible speaker podium.

PCODE **GB02A**
ADAAG 91 **4.32.3**
ADA 2010 **902.3**
CBC 2007 **1122B.3**
CBC 2019 **11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

137

- *As-Built Description:*

At door leading into exit stairway: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT RAMP/STAIR DOWN" sign at door.

PCODE **SA10B**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

2 JOB $270 **$540**

○ Staff Only

Priority 2
Severity 3

153

- *As-Built Description:*

Existing sign designating permanent room or space is noncompliant.

- *Proposed Solution:*

Provide compliant signage.

PCODE **SA13**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.2**
CBC 2007 **1117B.5**
CBC 2019 **11B-216.2**

Mitigated:
○ YES
◉ NO

7 JOB $450 **$3,150**

○ Staff Only

Priority 2
Severity 4

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Meeting Room

Assistive Listening

156

- *As-Built Description:*

No portable assistive listening system provided for small meeting room.

- *Proposed Solution:*

Share existing portable assistive listening system from other facility.

PCODE **GI01E**
ADAAG 91 **4.1.3(19)(b) &**
ADA 2010 **4.33.7**
219.1 & 706.1
CBC 2007 **1104B.2**
CBC 2019 **11B-219.1 & 11B-706.1**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 2
Severity 3

Door

158

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

3 SF $120 **$360**

○ Staff Only

Priority 2
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
139	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **50.0" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
140	• *As-Built Description:* Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44"). • *As-Built:* **59.5" high** • *Proposed Solution:* Relocate or replace existing hardware.	*PCODE* **ID17** *ADAAG 91* **4.13.9** *ADA 2010* **404.2.7** *CBC 2007* **1133B.2.5.2** *CBC 2019* **11B-404.2.7** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 2

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Operable Part

141

- *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

- *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 2
Severity 3

Protrusion Limits

155

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Flag: 5.0” at 74.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Mexican American Room

Electrical

134

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **54.5" high**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 2
Severity 3

Operable Part

144

- *As-Built Description:*

Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand.

- *As-Built:* **10 lbs**
- *Proposed Solution:*

Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.

PCODE **IC02**
ADAAG 91 **4.27.4**
ADA 2010 **309.4**
CBC 2007 **1117B.6.4**
CBC 2019 **11B-309.4**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
147	• *As-Built Description:* Operable part(s) require tight grasping, pinching, or twisting of the wrist with one hand. • *Proposed Solution:* Modify or replace the operable part(s) to not require tight grasping, pinching, or twisting of the wrist with one hand.	*PCODE* **IC02** *ADAAG 91* **4.27.4** *ADA 2010* **309.4** *CBC 2007* **1117B.6.4** *CBC 2019* **11B-309.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 2

Severity 3

Sink

146	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **37.0" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 2

Severity 4

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
145	• *As-Built Description:* Sink does not have knee space min. 27" high x 19" deep x 30" wide. • *Proposed Solution:* Remodel sink cabinet.	*PCODE* **IN06A** *ADAAG 91* **4.24.3** *ADA 2010* **606.2** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 2

Severity 2

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Women's and Men's Restrooms

Door Swing

151

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **36.0" to opposite wall.**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

2 JOB $7,800 **$15,600**

○ Staff Only

Priority 3
Severity 3

Restroom

152

- *As-Built Description:*

Single accommodation restroom not accessible; multiple compliance violations.

- *As-Built:* **72.0" x 81.0"**
- *Proposed Solution:*

Remodel area to provide single-occupant accessible restroom.

PCODE **WA01**
ADAAG 91 **4.22**
ADA 2010 **603.1**
CBC 2007 **1115B.3.2**
CBC 2019 **11B-603.1**

Mitigated:
○ YES
◉ NO

2 JOB $90,000 **$180,000**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Hallway

Door Clearance

150

- *As-Built Description:*

Door on accessible route has less than 32" clear and 80" (78" min. to closer if provided) opening width when 90° open.

- *As-Built:* **79.0" high**
- *Proposed Solution:*

Provide new, larger door and frame with new accessible hardware.

PCODE **ID01**
ADAAG 91 **4.13.5**
ADA 2010 **404.2.3**
CBC 2007 **1133B.1.1.1.1**
CBC 2019 **11B-404.2.3**

Mitigated:
○ YES
◉ NO

2 JOB $7,800 **$15,600**

○ Staff Only

Priority 2
Severity 4

Door Swing

148

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *Proposed Solution:*

Change door swing and remove latches.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

2 JOB $1,500 **$3,000**

○ Staff Only

Priority 2
Severity 2

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
149	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **74.75" to light bulb.** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 2

Severity 1

Conceptual Costs for **Floor:** First Floor **$255,450.00**

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$255,450.00**

Facility: **Mexican-American Center** Part: **Interior** Floor: **First Floor**

Address: **716 Columbia Ave** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Mexican-American Center					**$330,342.00**

Access Compliance Survey Report

Pan-Am Community Center

703 E. Sherwood Way

Facility #: 60

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Accessible Parking and Route to Entrance

Changes in Level

1365

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Up to 3.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 LF $300 **$2,400**

○ Staff Only

Priority 1
Severity 2

Cross Slope

1369

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **Up to 3.5%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

120 SF $75 **$9,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surfaces					
1262	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **2.9%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	16	SF	$36	**$576**
1263	• *As-Built Description:* Accessible parking space has slope greater than 1/4":12" (2%). • *As-Built:* **4.0%** • *Proposed Solution:* Modify slope at accessible parking space.	*PCODE* **EA05** *ADAAG 91* **4.6.3** *ADA 2010* **502.4** *CBC 2007* **1129B.3.3** *CBC 2019* **11B-502.4** **Mitigated:** ○ YES ◉ NO	200	SF	$36	**$7,200**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Parking

1259

- *As-Built Description:*

Accessible parking space smaller than 8' wide (CA only: 9' x 18').

- *As-Built:* **107.5" wide**
- *Proposed Solution:*

Modify parking space(s) to create accessible space.

PCODE **EA02A**
ADAAG 91 **4.6.3**
ADA 2010 **502.2**
CBC 2007 **1129B.3.1**
CBC 2019 **11B-502.2**

Mitigated:
○ YES
◉ NO

1 JOB $600 **$600**

○ Staff Only

Priority 1
Severity 2

1364

- *As-Built Description:*

Wheel stops not provided to prevent the encroachment of vehicles over the required clear width of an adjacent accessible route.

- *Proposed Solution:*

Provide wheel stops to prevent encroachment.

- ***Notes:***

PCODE **EA04L**
CBC 2019 **11B-502.7.2**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 1
Severity 4

The walk and curb ramp are 84.0" wide.

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Parking Signage					
1371	• *As-Built Description:* No "Tow Away" sign at parking lot entrance (required in CA only). • *Proposed Solution:* Provide "Tow Away" sign at parking lot entrance when altering area.	*PCODE* **EA04C** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.8.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$975	**$1,950**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 4				
1260	• *As-Built Description:* Sign relating to parking privileges for disabled persons is non-compliant. • *Proposed Solution:* Provide compliant parking signage that does not contain the word "Handicapped".	*PCODE* **EA04F** *ADA 2010* **502.6** *CBC 2007* **VC §22511.9.** *CBC 2019* **11B-502.6** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 4				

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1261	• *As-Built Description:* CA only: Additional Sign or additional language below the symbol of accessibility stating "Minimum Fine $250" not provided. • *Proposed Solution:* Provide compliant parking signage that includes fine information.	*PCODE* **EA04G** *CBC 2007* **1129B.4** *CBC 2019* **11B-502.6.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$300	**$600**

○ Staff Only

Priority 1

Severity 3

Protrusion Limits

1368	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Back Yard

Changes in Level

1360

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

- ***Notes:***

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

70 LF $63 **$4,410**

○ Staff Only

Priority 1
Severity 3

Includes lip onto grass from slab.

Cross Slope

1359

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

100 SF $75 **$7,500**

○ Staff Only

Priority 1
Severity 4

Or install directional signage.

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Curb Ramp					
1361	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **13.9%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02A** *ADAAG 91* **4.7.2** *ADA 2010* **406.1** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 3

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Bus Stop

Signage

1370

- *As-Built Description:*

Sign characters not readable because they are not sized for viewing distance.

- *As-Built:* **0.5" to 1.25" high characters are 92.0" to 97.0" high**
- *Proposed Solution:*

Provide compliant signage.

PCODE **SA02A**
ADAAG 91 **4.30.3**
ADA 2010 **703.5.5**
CBC 2007 **1117B.5.4**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 1

Severity 4

Conceptual Costs for **Floor:** On-site **$43,131.00**

Facility: **Pan-Am Community Center** Part: **Exterior** Floor: **On-site**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$43,131.00**

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Carpet/Doormat

1335

- *As-Built Description:*

Doormat not securely attached to ground or floor structure.

- *Proposed Solution:*

Attach doormat to floor surface or remove doormat.

PCODE **ID05A**
ADAAG 91 **4.5.3**
ADA 2010 **302.2**
CBC 2007 **1124B.3**
CBC 2019 **11B-302.2**

Mitigated:
○ YES
◉ NO

6 JOB $225 **$1,350**

○ Staff Only

Priority 2
Severity 3

Door

1338

- *As-Built Description:*

Vision Light at door that permits viewing, does not have bottom of at least one glazed panel located 43 inches maximum above the finish floor. (Exception: More than 66" above finished floor.)

- *As-Built:* **46.0" high**
- *Proposed Solution:*

Provide new door with vision panel at 43" max.

- ***Notes:***

PCODE **ID06C**
ADA 2010 **404.2.11**
CBC 2019 **11B-404.2.11**

Mitigated:
○ YES
◉ NO

10 JOB $7,500 **$75,000**

○ Staff Only

Priority 2
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door Stopper

1306

- *As-Built Description:*

At push side of door on accessible route, bottom 10" does not have a smooth, uninterrupted surface.

- *Proposed Solution:*

Remove door stopper when altering area. Provide rubber wedge.

- ***Notes:***

PCODE **ID06A**
ADA 2010 **404.2.10**
CBC 2007 **1133B.2.6**
CBC 2019 **11B-404.2.10**

Mitigated:
○ YES
◉ NO

10 JOB $75 **$750**

○ Staff Only

Priority 2
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Electrical

1305

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **48.25" to top of switch. 50.0" to top of box.**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

12 JOB $900 **$10,800**

○ Staff Only

Priority 4
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Fire Alarm

1337

- *As-Built Description:*

Fire alarm pull stations not 42"-48" from floor to center. Note: Required only at new construction, or where mounting location was or is to be remodeled.

- *As-Built:* **49.0" high**
- *Proposed Solution:*

Remount fire alarm station to be 42" min., and 48" max. from floor to center.

PCODE **IC03**
ADAAG 91 **4.2.5**
ADA 2010 **308.2.1**
CBC 2007 **907.4.2**
CBC 2019 **907.4.2.2**

Mitigated:
○ YES
◉ NO

5 JOB $825 **$4,125**

○ Staff Only

Priority 4
Severity 4

Protrusion Limits

1303

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **AED: 7.5" at 48.5" high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1304

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **AED: 55.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 4

Signage

1336

- *As-Built Description:*

At final exit door to exterior: Where required exit signs are installed, signs to provide exiting information for people with vision impairment are not provided.

- *Proposed Solution:*

Provide raised letter/Braille "EXIT" sign at door.

PCODE **SA10A**
ADAAG 91 **4.1.3(16)**
ADA 2010 **216.4.1**
CBC 2007 **1011.3**
CBC 2019 **11B-216.4.1**

Mitigated:
○ YES
◉ NO

6 JOB $270 **$1,620**

○ Staff Only

Priority 2
Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1363	• *As-Built Description:* Existing sign designating permanent room or space is noncompliant. • *Proposed Solution:* Provide compliant signage.	*PCODE* **SA13** *ADAAG 91* **4.1.3(16)(a)** *ADA 2010* **216.2** *CBC 2007* **1117B.5** *CBC 2019* **11B-216.2** **Mitigated:** ○ YES ◉ NO	12	JOB	$450	**$5,400**

○ Staff Only

Priority 2

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Senior Room

Changes in Level

1265

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0" in exterior door maneuvering clearance.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

5 SF $63 **$315**

○ Staff Only

Priority 2
Severity 4

Non-Fixed Desk

1264

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **40 seats, 1 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

- ***Notes:***

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 2

The accessible seat is separate from the others.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Women's Restroom Senior Room

Accessories

1273

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 49.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 2

1270

- *As-Built Description:*

Bottom of mirror located above lavatories or countertops more than 40" above floor.

- *As-Built:* **40.6" high**
- *Proposed Solution:*

Relocate or provide new accessible mirror.

PCODE **WG03**
ADAAG 91 **4.19.6**
ADA 2010 **603.3**
CBC 2007 **1115B.8.1**
CBC 2019 **11B-603.3**

Mitigated:
○ YES
◉ NO

1 JOB $450 **$450**

○ Staff Only

Priority 3
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1268

- *As-Built Description:*

Door lock, latch or handle less than 34" or more than 48" above the floor (CA only: 34" to 44").

- *As-Built:* **48.0" high**
- *Proposed Solution:*

Relocate or replace existing hardware.

- ***Notes:***

PCODE **ID17**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 3

This element complies with Safe Harbor if altered or constructed before March 15, 2012. The dimensional requirements in this CBC citation applied from the 1998 CBC to the code cycle at the time of this survey.

Electrical

1279

- *As-Built Description:*

Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box.

- *As-Built:* **48.25"and 50.0" to top of box**
- *Proposed Solution:*

Relocate light switches or control to between 15" and 48" height.

- ***Notes:***

PCODE **IC01**
ADAAG 91 **4.2.5 & 6**
ADA 2010 **308.2.1 & 308.2.2**
CBC 2007 **1117B.6.3**
CBC 2019 **11B-308.2.1 & 11B-308.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $900 **$900**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Grab Bars

1276

- *As-Built Description:*

Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet).

- *As-Built:* **Extends 23.0" in front of the water closet**
- *Proposed Solution:*

Provide or relocate accessible side grab bar.

PCODE **WB07A**
ADAAG 91 **Fig. 29(b)**
ADA 2010 **604.5.1**
CBC 2007 **1115B.4.1.3.1**
CBC 2019 **11B-604.5.1**

Mitigated:
○ YES
◉ NO

1 JOB $780 **$780**

○ Staff Only

Priority 3
Severity 4

1275

- *As-Built Description:*

The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side.

- *As-Built:* **Extends 10.5" on narrow side**
- *Proposed Solution:*

Provide or relocate accessible rear grab bar.

- ***Notes:***

PCODE **WB07B**
ADAAG 91 **4.17.6**
ADA 2010 **604.5.2**
CBC 2007 **1115B.4.1.3.2**
CBC 2019 **11B-604.5.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,020 **$1,020**

○ Staff Only

Priority 3
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. .

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1274	• *As-Built Description:* Grab bars not at 33" to 36" from floor • *As-Built:* **36.6" to top** • *Proposed Solution:* Relocate accessible grab bars.	*PCODE* **WB07C** *ADAAG 91* **4.16.4** *ADA 2010* **609.4** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **& 2 11B-609.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**
1277	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 5.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1269

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.0" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1271

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1272

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0” at 37.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Signage

1266

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1267	• *As-Built Description:* Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol). • *As-Built:* **Not beveled.** • *Proposed Solution:* Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.	*PCODE* **SA15** *CBC 2007* **1115B.6** *CBC 2019* **11B-703.7.2.6** **Mitigated:** ○ YES ◉ NO	1	JOB	$270	**$270**

○ Staff Only

Priority 3

Severity 3

Stall Door

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1278	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Men's Restroom Senior Room

Accessible Compartment

1288

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **Not opposite and 5.2"**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig.**
ADA 2010 **30(a)** **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Accessories

1285

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 47.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1286	• *As-Built Description:* Bottom of mirror located above lavatories or countertops more than 40" above floor. • *As-Built:* **40.75" high** • *Proposed Solution:* Relocate or provide new accessible mirror.	*PCODE* **WG03** *ADAAG 91* **4.19.6** *ADA 2010* **603.3** *CBC 2007* **1115B.8.1** *CBC 2019* **11B-603.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$450	**$450**

○ Staff Only

Priority 3

Severity 4

Electrical

1282	• *As-Built Description:* Electric switch or control mounted less than 15" measured to the bottom of the outlet box or greater than 48 inches measured to the top of the outlet box. • *As-Built:* **48.25" and 50.0" to top of box** • *Proposed Solution:* Relocate light switches or control to between 15" and 48" height. • ***Notes:***	*PCODE* **IC01** *ADAAG 91* **4.2.5 & 6** *ADA 2010* **308.2.1 & 308.2.2** *CBC 2007* **1117B.6.3** *CBC 2019* **11B-308.2.1 & 11B-308.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$900	**$900**

○ Staff Only

Priority 3

Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Grab Bars					
1291	• *As-Built Description:* Grab bars not at 33" to 36" from floor • *As-Built:* **36.25" to center** • *Proposed Solution:* Relocate accessible grab bars.	*PCODE* **WB07C** *ADAAG 91* **4.16.4** *ADA 2010* **609.4** *CBC 2007* **1115B.4.1.3.1 & 2** *CBC 2019* **11B-609.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**
1290	• *As-Built Description:* Accessories/dispensers in accessible stall located closer than 1-1/2" below or 12" above grab bar impedes its use. • *As-Built:* **TPD: 8.0" above grab bar** • *Proposed Solution:* Relocate accessories/dispensers within applicable reach range and to be no closer than 1-1/2" below and 12" above grab bars (except if accessories are recessed, flush with wall, and have no sharp edges).	*PCODE* **WB07I** *ADAAG 91* **4.26.2** *ADA 2010* **609.3** *CBC 2007* **1133B.4.2.5** *CBC 2019* **11B-609.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$225	**$225**

○ Staff Only

Priority 3

Severity 4

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Lavatory

1284

- *As-Built Description:*

Wheelchair clearance under lavatory apron or lavatory counter front edge less than 29" high.

- *As-Built:* **28.25" high**
- *Proposed Solution:*

Remount compliant fixture to accessible height.

- ***Notes:***

PCODE **WD03A**
ADAAG 91 **4.19.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.3.3**
CBC 2019 **11B-306.3.1**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3
Severity 3

This element complies with 1991 ADAAG and the 2010 ADAS. The dimensional requirements in this CBC citation applied from the 2007 CBC to the code cycle at the time of this survey

1287

- *As-Built Description:*

Hot or sharp-surfaced water/drain pipe not insulated or covered.

- *Proposed Solution:*

Insulate or cover water/drain pipe.

PCODE **WD05**
ADAAG 91 **4.19.4**
ADA 2010 **606.5**
CBC 2007 **1115B.4.3.4**
CBC 2019 **11B-606.5**

Mitigated:
○ YES
◉ NO

1 JOB $360 **$360**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1280

• *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

• *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

• ***Notes:***

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Noncompliant tactile sign on door.

1281

• *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

• *As-Built:* **Not beveled or radiused.**

• *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Stall Door

1289

- *As-Built Description:*

Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock).

- *Proposed Solution:*

Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.

PCODE **WB05C**
ADAAG 91 **4.17.5**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.5**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3

Severity 3

Urinal

1283

- *As-Built Description:*

30" x 48" clear floor space in front of accessible urinal not provided.

- *Proposed Solution:*

Provide clear floor space in front of accessible urinal. Remodel restroom as needed.

- ***Notes:***

Alcove at urinal 27.0” to 30.5” wide between privacy screen, paper towel dispenser and trash can. Relocate privacy screen.

PCODE **WE04**
ADAAG 91 **4.18.3**
ADA 2010 **605.3**
CBC 2007 **1115B.4.2.3**
CBC 2019 **11B-605.3**

Mitigated:
○ YES
◉ NO

1 JOB $3,000 **$3,000**

○ Staff Only

Priority 3

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Public Kitchen Senior Room

Cafeteria Line

1297

- *As-Built Description:*

Counters, shelves, equipment are not accessible to disabled persons (required: tray slides 34" high maximum; at least 50% of shelves less than 48" high).

- *Proposed Solution:*

Provide new counter and shelves.

- ***Notes:***

PCODE **FB02**
ADAAG 91 **5.5**
ADA 2010 **227.4**
CBC 2007 **1104B.5.5**
CBC 2019 **11B-227.4**

Mitigated:
○ YES
◉ NO

5 LF $600 **$3,000**

○ Staff Only

Priority 4
Severity 3

Tray slide 42.0” high

Door Swing

1362

- *As-Built Description:*

Hinge approach: At push side, door does not have clear and level maneuvering space measuring 54" width (starting at latch) x 42" deep (48" deep if door has both, latch and closer) (CA only: 54" x 44").

- *As-Built:* **41.0” to fire extinguisher**
  43.0” to wall.
- *Proposed Solution:*

Remodel opposite wall.

PCODE **ID26**
ADAAG 91 **Fig. 25(b)**
ADA 2010 **404.2.4**
CBC 2007 **Fig. 11B-26A (b)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1294

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 8.0” at 49.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

The dispenser is in the door maneuvering clearance.

1298

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Tray slide: 6.0” at 41.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1295

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **36.0" high obstructed reach to controls on the counters and switches.**
- *Proposed Solution:*

Lower the counters.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

1296

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **59.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Sink

1292

- *As-Built Description:*

Sink rim higher than 34" above floor.

- *As-Built:* **36.5" high**
- *Proposed Solution:*

Remodel sink cabinet to lower sink.

PCODE **IN06**
ADAAG 91 **4.24.2**
ADA 2010 **606.3**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.3**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 4
Severity 4

1293

- *As-Built Description:*

Sink does not have knee space min. 27" high x 19" deep x 30" wide.

- *Proposed Solution:*

Remodel sink cabinet.

- ***Notes:***

Cook top provided.

PCODE **IN06A**
ADAAG 91 **4.24.3**
ADA 2010 **606.2**
CBC 2007 **1115B.4.7.1**
CBC 2019 **11B-606.2**

Mitigated:
○ YES
◉ NO

1 JOB $5,250 **$5,250**

○ Staff Only

Priority 4
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Computer Room

Desk

1301

- *As-Built Description:*

Accessible fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **25.5" high**
- *Proposed Solution:*

Provide new fixed accessible table or desk.

PCODE **IN02**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1 & 902.3**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 4
Severity 4

Reach Range

1300

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **36.0" high obstruction**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Sink					
1299	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.3" high** • *Proposed Solution:* Remodel sink cabinet to lower sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$5,250	**$5,250**

○ Staff Only

Priority 4

Severity 4

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Conference

Non-Fixed Desk

1302

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **6 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:

○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Senior Room Consulting

Door Swing

1307

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **0.0"**
- *Proposed Solution:*

Change door swing.

PCODE **ID23**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 2

1308

- *As-Built Description:*

Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors).

- *As-Built:* **55.0"**
- *Proposed Solution:*

Remove or relocate furniture or storage items.

PCODE **ID23A**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $150 **$150**

○ Staff Only

Priority 2
Severity 4

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Women's Restroom

Accessories

1313

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 44.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

1320

- *As-Built Description:*

Toilet paper dispenser less than 15" (CA: 19") or more than 48" above floor or not within 7" to 9" from front of water closet (Note: CA pre-2010 is allowed within 12" from front of water closet).

- *As-Built:* **46.5" high and above grab bar.**
- *Proposed Solution:*

Relocate or provide new toilet paper dispenser.

PCODE **WG02**
ADAAG 91 **4.16.6**
ADA 2010 **604.7**
CBC 2007 **1115B.8.4**
CBC 2019 **11B-604.7**

Mitigated:
○ YES
◉ NO

1 JOB $225 **$225**

○ Staff Only

Priority 3
Severity 1

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Coat Hook					
1322	• *As-Built Description:* Accessible coat hook not within reach range. • *As-Built:* **69.0" high** • *Proposed Solution:* Adjust existing or provide new coat hook at maximum 48" height.	*PCODE* **WG03A** *ADAAG 91* **4.2.5** *ADA 2010* **603.4** *CBC 2007* **1118B.5** *CBC 2019* **11B-603.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
		○ Staff Only				
		Priority **3** ***Severity*** **1**				
	Door Swing					
1312	• *As-Built Description:* Front approach: At pull side, door does not have clear and level maneuvering space measuring door width plus 18" x 60". (24" x 60" at exterior doors). • *As-Built:* **59.4"** • *Proposed Solution:* Alter opposite wall.	*PCODE* **ID23** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**
		○ Staff Only				
		Priority **3** ***Severity*** **4**				

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1309	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **10.5”** • *Proposed Solution:* Remove latch.	*PCODE* **ID24A** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**

○ Staff Only

Priority 3

Severity 4

Grab Bars

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1319	• *As-Built Description:* Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet). • *As-Built:* **Extends 13.0” and 21.0” in front of water closet.** • *Proposed Solution:* Provide or relocate accessible side grab bar.	*PCODE* **WB07A** *ADAAG 91* **Fig. 29(b)** *ADA 2010* **604.5.1** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **11B-604.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**

○ Staff Only

Priority 3

Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1321	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 10.5" on narrow side** • *Proposed Solution:* Provide or relocate accessible rear grab bar.	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 4

Lavatory

1314	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Protrusion Limits

1316

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **PTD: 7.5” at 40.0” high**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 3
Severity 3

Dispensers.

Semi-Ambulant Stall

1315

- *As-Built Description:*

Semi-Ambulant stall with 35-37" width, minimum 60" depth, parallel grab bars, and out-swinging door not provided (one required where 6 or more exist).

- *As-Built:* **8 compartments.**
- *Proposed Solution:*

Provide 36" wide stall with out-swinging door and two side grab bars. Remodel restroom as needed.

PCODE **WB06A**
ADAAG 91 **4.22.4**
ADA 2010 **213.3.1 & 604.8.2**
CBC 2007 **1115B.3.1.5**
CBC 2019 **11B-213.3.1 & 11B-604.8.2**

Mitigated:
○ YES
◉ NO

1 JOB $5,700 **$5,700**

○ Staff Only

Priority 3
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Signage

1310

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

1311

- *As-Built Description:*

Required in CA only: identification symbol centered 58" to 60" high on sanitary facility door that contrasts with the door not provided (women: 12" ø circle, men: 12" triangle, unisex: combined symbol).

- *As-Built:* **Not beveled.**
- *Proposed Solution:*

Provide properly mounted sanitary facility symbol when altering area. If wheelchair accessible, include International Symbol of Accessibility on sign.

PCODE **SA15**
CBC 2007 **1115B.6**
CBC 2019 **11B-703.7.2.6**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Stall Door					
1317	• *As-Built Description:* Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock). • *Proposed Solution:* Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.	*PCODE* **WB05C** *ADAAG 91* **4.17.5** *ADA 2010* **604.8.1.2** *CBC 2007* **1115B.3.1.4.5** *CBC 2019* **11B-604.8.1.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 3				
	Toilet Stall					
1318	• *As-Built Description:* Toilet stall less than 60" wide. • *As-Built:* **59.3" wide** • *Proposed Solution:* Provide new accessible stall.	*PCODE* **WB06** *ADAAG 91* **4.17.3** *ADA 2010* **604.8.1.1** *CBC 2007* **1115B.3.1.4.1** *CBC 2019* **11B-604.8.1.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$4,500	**$4,500**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 4				

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

9 Men's Restroom

Accessible Compartment

1330

- *As-Built Description:*

The location of the stall door is not in front of the clear space (next to the water closet), with a maximum stile width of 4 ".

- *As-Built:* **4.5"**
- *Proposed Solution:*

Remodel compartment.

PCODE **WB05D**
ADAAG 91 **4.17.3 & Fig.**
ADA 2010 **30(a)** **604.8.1.2**
CBC 2007 **1115B.3.1.4.3**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 3
Severity 4

Accessories

1324

- *As-Built Description:*

Dispensers in sanitary facilities, such as for towels, soap, sanitary napkins, seat covers, etc., and waste receptacles more than 48" (CA only: 40") from floor to highest operating slot or control.

- *As-Built:* **SD: 43.0" high**
- *Proposed Solution:*

Relocate existing restroom accessories.

- ***Notes:***

PCODE **WG01A**
ADAAG 91 **4.23.7**
ADA 2010 **308.2.1**
CBC 2007 **1115B.8.3**
CBC 2019 **11B-603.5**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 4

If 48" maximum AFF, this element complies with 1991 ADAAG and the 2010 ADAS. If 54" maximum AFF side reach, this element complies with Safe Harbor if constructed or altered before March 15, 2012. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Coat Hook					
1334	• *As-Built Description:* Accessible coat hook not within reach range. • *As-Built:* **13.0" high** • *Proposed Solution:* Adjust existing or provide new coat hook at maximum 48" height.	*PCODE* **WG03A** *ADAAG 91* **4.2.5** *ADA 2010* **603.4** *CBC 2007* **1118B.5** *CBC 2019* **11B-603.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$150	**$150**
		○ Staff Only				
		Priority **3** ***Severity*** **4**				
	Grab Bars					
1331	• *As-Built Description:* Side grab bar less than 42" long, or located more than 12 inches max. from the rear wall, or extending less than 54" from rear wall (CA only: front end min. 24" in front of water closet). • *As-Built:* **Extends 52.5". 20.0" in front of the water closet.** • *Proposed Solution:* Provide or relocate accessible side grab bar.	*PCODE* **WB07A** *ADAAG 91* **Fig. 29(b)** *ADA 2010* **604.5.1** *CBC 2007* **1115B.4.1.3.1** *CBC 2019* **11B-604.5.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$780	**$780**
		○ Staff Only				
		Priority **3** ***Severity*** **3**				

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1332	• *As-Built Description:* The rear wall grab is less than 36" min. or does not extend from the centerline of the water closet 12" min. on one side and 24" min. on the other side. • *As-Built:* **Extends 11.0" on narrow side** • *Proposed Solution:* Provide or relocate accessible rear grab bar.	*PCODE* **WB07B** *ADAAG 91* **4.17.6** *ADA 2010* **604.5.2** *CBC 2007* **1115B.4.1.3.2** *CBC 2019* **11B-604.5.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,020	**$1,020**

○ Staff Only

Priority 3

Severity 4

Lavatory

1325	• *As-Built Description:* Hot or sharp-surfaced water/drain pipe not insulated or covered. • *Proposed Solution:* Insulate or cover water/drain pipe.	*PCODE* **WD05** *ADAAG 91* **4.19.4** *ADA 2010* **606.5** *CBC 2007* **1115B.4.3.4** *CBC 2019* **11B-606.5** **Mitigated:** ○ YES ◉ NO	1	JOB	$360	**$360**

○ Staff Only

Priority 3

Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Semi-Ambulant Stall

1329

- *As-Built Description:*

Semi-Ambulant stall with 35-37" width, minimum 60" depth, parallel grab bars, and out-swinging door not provided (one required where 6 or more exist).

- *As-Built:* **3 urinals and 4 compartments.**
- *Proposed Solution:*

Provide 36" wide stall with out-swinging door and two side grab bars. Remodel restroom as needed.

- ***Notes:***

PCODE **WB06A**
ADAAG 91 **4.22.4**
ADA 2010 **213.3.1 & 604.8.2**
CBC 2007 **1115B.3.1.5**
CBC 2019 **11B-213.3.1 & 11B-604.8.2**

Mitigated:
○ YES
◉ NO

1 JOB $5,700 **$5,700**

○ Staff Only

Priority 3
Severity 2

Complies with Safe Harbor and/or CBC if altered or constructed before March 15, 2012.
Earlier codes did not include urinals.

Signage

1323

- *As-Built Description:*

Entrance to toilet or bathing facility not identified with ADAAG compliant signage.

- *Proposed Solution:*

Provide ADA compliant sign mounted at 48" min. above to baseline of the lowest Braille cells and 60" max. to baseline of the highest line of raised characters on nearest adjacent wall, on latch side of a single door (located not to cause a Braille reader to stand within the door swing).

PCODE **SA11A**
ADAAG 91 **4.1.3(16)(a)**
ADA 2010 **216.8**
CBC 2019 **11B-216.8**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 3
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Stall Door

1328

- *As-Built Description:*

Stall door to accessible compartment not self closing.

- *Proposed Solution:*

Adjust closer.

PCODE **WB05B**
ADAAG 91 **4.22.4**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.4**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $75 **$75**

○ Staff Only

Priority 3
Severity 4

1327

- *As-Built Description:*

Stall door does not have accessible operating hardware (U-pulls on both sides, flip-over or sliding lock).

- *Proposed Solution:*

Provide new accessible locking hardware that does not require grasping, pinching, or twisting and U-pulls on both sides.

PCODE **WB05C**
ADAAG 91 **4.17.5**
ADA 2010 **604.8.1.2**
CBC 2007 **1115B.3.1.4.5**
CBC 2019 **11B-604.8.1.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 3
Severity 3

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Urinal					
1326	• *As-Built Description:* Fixture mounted with rim more than 17" above floor. • *As-Built:* **18.0" high** • *Proposed Solution:* Provide accessible urinal. Remodel restroom as needed.	*PCODE* **WE02** *ADAAG 91* **4.18.2** *ADA 2010* **605.2** *CBC 2007* **1115B.4.2.1** *CBC 2019* **11B-605.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,200	**$7,200**

○ Staff Only

Priority 3

Severity 4

	Water Closet					
1333	• *As-Built Description:* Water closet not 16"-18" (CA: 17"-18") from near side wall to center line of water closet (2010 ADAAG: 16"-18"). • *As-Built:* **18.75"** • *Proposed Solution:* Relocate existing water closet and plumbing, remount with offset closet flange to provide 18" max. from side wall.	*PCODE* **WB02C** *ADAAG 91* **Fig. 28** *ADA 2010* **604.2** *CBC 2007* **1115B.4.1.1** *CBC 2019* **11B-604.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**

○ Staff Only

Priority 3

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Gym

Change in Direction

1349

- *As-Built Description:*

Landing at change of direction not 60" minimum by 72" minimum in the direction of downward travel from the upper ramp run.

- *As-Built:* **60.0" at mid landing.**
- *Proposed Solution:*

Modify landing at change of direction to 60" x 72".

- ***Notes:***

PCODE **EB08**
ADAAG 91 **4.8.4(3)**
ADA 2010 **405.7.4**
CBC 2007 **1133B.5.4**
CBC 2019 **11B-405.7.4**

Mitigated:
○ YES
◉ NO

30 SF $135 **$4,050**

○ Staff Only

Priority 2
Severity 4

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Clear Space

1366

- *As-Built Description:*

Clear floor space is not 30" x 48" minimum at all switches, outlets and other controls.

- *Proposed Solution:*

Relocate switch.

- ***Notes:***

PCODE **IC06A**
ADAAG 91 **4.1.2(12) &**
ADA 2010 **|4.1.3(13)| 309.2**
CBC 2007 **1117B.6.2**
CBC 2019 **11B-309.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 3

Clear floor space at switch slopes 8.9%

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Door

1358

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **3.1%**
- *Proposed Solution:*

Modify surface slope at door.

- ***Notes:***

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 2
Severity 4

Or install directional signs inside and out.

1367

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **0.6" level change**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:

○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 2
Severity 2

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Floor or Ground Surface

1341

- *As-Built Description:*

Walk: openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **1.0" x 1.0"**
- *Proposed Solution:*

Fill opening and provide new panic door hardware.

- ***Notes:***

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 2
Severity 2

Door also does not have bottom 10" smooth uninterrupted surface.

Handrails

1344

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1 & .5.5**
CBC 2019 **11B-505.2**

Mitigated:
○ YES
◉ NO

15 LF $285 **$4,275**

○ Staff Only

Priority 2
Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Height

1345

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **32.0" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

- ***Notes:***

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:
○ YES
◉ NO

15 LF $225 **$3,375**

○ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012.

1348

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **32.0" high**
- *Proposed Solution:*

Remove existing and provide new handrail.

- ***Notes:***

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:
○ YES
◉ NO

80 LF $225 **$18,000**

○ Staff Only

Priority 2
Severity 4

This element complies with Safe Harbor if altered or constructed before March 15, 2012.

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Slope					
1346	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **8.7%** • *Proposed Solution:* Demolish existing and provide new ramp with handrails.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	40	SF	$300	**$12,000**
						○ Staff Only
						Priority **2**
						Severity **4**
	Stairway					
1343	• *As-Built Description:* The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread. • *Proposed Solution:* Provide 2" min., 4" max. wide contrasting color strip 1" max. from nosing on top & bottom treads when altering area.	*PCODE* **II02B** *ADA 2010* **504.4** *CBC 2007* **1133B.4.4** *CBC 2019* **11B-504.4.1** **Mitigated:** ○ YES ◉ NO	20	LF	$42	**$840**
						○ Staff Only
						Priority **2**
						Severity **3**

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Top & Bottom Extension at Stairs

1342

- *As-Built Description:*

Stair handrail does not extend horizontally 12" minimum beyond top nosing, and one tread width sloped, plus 12" minimum horizontally beyond the bottom nosing.

- *As-Built:* **6.0"**
- *Proposed Solution:*

Extend stair handrail at top and bottom (cost for each extension piece).

PCODE **ED06**
ADAAG 91 **4.9.4(2)**
ADA 2010 **505.10.2; 505.10.3**
CBC 2007 **1133B.4.2.2**
CBC 2019 **11B-505.10.2; 11B-505.10.3**

Mitigated:
○ YES
◉ NO

2 JOB $510 **$1,020**

○ Staff Only

Priority 2
Severity 3

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:
1,,,
2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Top and Bottom Extension at

1347

- *As-Built Description:*

Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp.

- *Proposed Solution:*

Provide ramp handrail extension (cost for each extension piece).

PCODE **ED05**
ADAAG 91 **4.8.5(2)**
ADA 2010 **505.10.1**
CBC 2007 **1133B.4.2.2 &**
CBC 2019 **1133B.5.5.1**
11B-505.10.1

Mitigated:
○ YES
◉ NO

1 JOB $510 **$510**

○ Staff Only

Priority 2
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Public Kitchen

Door

1357

- *As-Built Description:*

Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%).

- *As-Built:* **2.9%**
- *Proposed Solution:*

Modify surface slope at door.

PCODE **ID11**
ADAAG 91 **4.13.6**
ADA 2010 **404.2.4.4**
CBC 2007 **1133B.2.4**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

25 SF $120 **$3,000**

○ Staff Only

Priority 4
Severity 4

Door Swing

1353

- *As-Built Description:*

Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer).

- *As-Built:* **1.0"**
- *Proposed Solution:*

Provide relocated new door and frame; remodel walls as needed.

- ***Notes:***

PCODE **ID24B**
ADAAG 91 **Fig. 25(a)**
ADA 2010 **404.2.4**
CBC 2007 **11B-26A(a)**
CBC 2019 **11B-404.2.4**

Mitigated:
○ YES
◉ NO

1 JOB $7,800 **$7,800**

○ Staff Only

Priority 4
Severity 2

Verify whether this is a required exit.

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1356	• *As-Built Description:* Front approach: At push side, door does not have clear and level maneuvering space measuring door width x 48" (door width plus 12" if door has both, latch and closer). • *As-Built:* **8.75" deep alcove.** • *Proposed Solution:* Provide relocated new door and frame; remodel walls as needed.	*PCODE* **ID24B** *ADAAG 91* **Fig. 25(a)** *ADA 2010* **404.2.4** *CBC 2007* **11B-26A(a)** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,800	**$7,800**

○ Staff Only

Priority 4

Severity 3

Non-Fixed Desk

1352	• *As-Built Description:* Accessible non-fixed kitchen work table (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided. • *As-Built:* **Work surfaces less than 34.0" throughout. No knee clearance.** • *Proposed Solution:* Provide kitchen table with accessible dimensions.	*PCODE* **IN02A** *ADAAG 91* **4.32.3 & .4** *ADA 2010* **306.1** *CBC 2007* **1122B.3 & 4** *CBC 2019* **11B-306.1 & 11B-902.3** **Mitigated:** ○ YES ◉ NO	3	JOB	$4,800	**$14,400**

○ Staff Only

Priority 4

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Reach Range

1351

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **25.0" deep.**
- *Proposed Solution:*

Modify equipment or mounting.

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

2 JOB $300 **$600**

○ Staff Only

Priority 4
Severity 4

1354

- *As-Built Description:*

Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth.

- *As-Built:* **52.0" high**
- *Proposed Solution:*

Modify equipment or mounting.

- ***Notes:***

PCODE **IE02**
ADAAG 91 **4.2.6**
ADA 2010 **308.3.1**
CBC 2007 **1118B.6**
CBC 2019 **11B-308.3**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 4
Severity 4

This element complied with Safe Harbor and the CBC if altered or constructed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1355	• *As-Built Description:* Reach height to control or access point, where side approach is available, exceeds 48" or is less than 15" in height, or exceeds 10" in depth. • *As-Built:* **Controls and outlets at counters are obstructed by counters greater than 34.0" high.** • *Proposed Solution:* Modify equipment or mounting.	*PCODE* **IE02** *ADAAG 91* **4.2.6** *ADA 2010* **308.3.1** *CBC 2007* **1118B.6** *CBC 2019* **11B-308.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 4

Severity 4

Sink

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1350	• *As-Built Description:* Sink rim higher than 34" above floor. • *As-Built:* **36.0" high** • *Proposed Solution:* Remodel existing or provide new sink.	*PCODE* **IN06** *ADAAG 91* **4.24.2** *ADA 2010* **606.3** *CBC 2007* **1115B.4.7.1** *CBC 2019* **11B-606.3** **Mitigated:** ○ YES ◉ NO	4	JOB	$5,250	**$21,000**

○ Staff Only

Priority 4

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Teen Room

Door Hardware

1340

- *As-Built Description:*

Door does not have accessible operating hardware.

- *Proposed Solution:*

Provide lever handle or other accessible hardware.

PCODE **ID07**
ADAAG 91 **4.13.9**
ADA 2010 **404.2.7**
CBC 2007 **1133B.2.5.2**
CBC 2019 **11B-404.2.7**

Mitigated:
○ YES
◉ NO

2 JOB $450 **$900**

○ Staff Only

Priority 2
Severity 3

Protrusion Limits

1339

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Install drape cloth when not in use.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 2
Severity 2

Pool table and foosball are protruding objects.

Conceptual Costs for **Floor:** First Floor **$299,820.00**

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Interior					**$299,820.00**

Facility: **Pan-Am Community Center** Part: **Interior** Floor: **First Floor**

Address: **703 E. Sherwood Way** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Pan-Am Community Center					**$342,951.00**

Access Compliance Survey Report

Community Garden

621 E. 4th Street

Facility #: P1

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Parking and Entrance on Fourth St

Curb Ramp

452

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **15.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 2

Probably not a curb ramp but a driveway. Lip at street. 8.0% gutter. 20.0% flares. No domes.

Floor or Ground Surfaces

451

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **5.3% on street. 8.0% at gutter.**
- *Proposed Solution:*

Modify slope at accessible parking space.

- ***Notes:***

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

162 SF $36 **$5,832**

○ Staff Only

Priority 1
Severity 2

Verify City street parking requirements. The street parking at this facility may be informational. The Ninth Circuit found that, despite the lack of accessibility standards, on-street parking is a "normal function" of a city and therefore must be made accessible.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Parking and Entrance on N Lake

Curb Ramp

454

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **Up to 22.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 1

Verify street parking requirements. Probably not going to be a curb ramp but remain a driveway. Lip at street. No domes. 15.0% flares.

Floor or Ground Surfaces

453

- *As-Built Description:*

Accessible parking space has slope greater than 1/4":12" (2%).

- *As-Built:* **3.5%**
- *Proposed Solution:*

Modify slope at accessible parking space.

PCODE **EA05**
ADAAG 91 **4.6.3**
ADA 2010 **502.4**
CBC 2007 **1129B.3.3**
CBC 2019 **11B-502.4**

Mitigated:
○ YES
◉ NO

144 SF $36 **$5,184**

○ Staff Only

Priority 1
Severity 4

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Garden

Floor or Ground Surface

455

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **1.0" wide.**
- *Proposed Solution:*

Fill gaps.

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

50 LF $240 **$12,000**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

456

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *As-Built:* **Vegetation is less than 80.0"**
- *Proposed Solution:*

Remove/relocate protruding object. Patch existing surface.

- ***Notes:***

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

Where the enforcing agency finds that, in specific areas, the natural environment would be materially damaged by compliance with these regulations, such areas shall be subject to these regulations only to the extent that such material damage would not occur. " In addition to possibly qualifying for this exception, trimming the trees may put fruit out of reach. Consider whether harvesting fruit is an activity which is intended to be provided at this garden. Trim Ornamental vegetation.

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Walk

457

- *As-Built Description:*

Walk more than 36" but less than 48" wide (required in CA only).

- *As-Built:* **47.5" to 47.75" wide**
- *Proposed Solution:*

Enlarge width of walk to 48".

- ***Notes:***

PCODE **EF08**

CBC 2007 **1133B.7.1**

CBC 2019 **11B-403.5.1.3**

Mitigated:

○ YES

◉ NO

100 SF $135 **$13,500**

○ Staff Only

Priority 1

Severity 4

Occurs at figs, persimmons, avocados, and plums. Consider whether planting these trees on an accessible route provides equivalent facilitation.

458

- *As-Built Description:*

Walk more than 36" but less than 48" wide (required in CA only).

- *As-Built:* **46.0" wide**
- *Proposed Solution:*

Enlarge width of walk to 48".

- ***Notes:***

PCODE **EF08**

CBC 2007 **1133B.7.1**

CBC 2019 **11B-403.5.1.3**

Mitigated:

○ YES

◉ NO

30 SF $135 **$4,050**

○ Staff Only

Priority 1

Severity 4

Occurs at tangerines. Consider whether planting these trees on an accessible route provides equivalent facilitation.

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
459	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **46.5" wide** • *Proposed Solution:* Enlarge width of walk to 48". • ***Notes:***	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	20	SF	$135	**$2,700**

○ Staff Only

Priority 1

Severity 4

Occurs at unidentified citrus tree. Consider whether planting these trees on an accessible route provides equivalent facilitation.

Conceptual Costs for **Floor:** On-site **$58,566.00**

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$58,566.00**

Facility: **Community Garden** Part: **Exterior** Floor: **On-site**

Address: **621 E. 4th Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Community Garden					**$58,566.00**

Access Compliance Survey Report

Sunset Park

Sunset Avenue and Accornero Street

Facility #: P10

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Curb Ramp National

Curb Ramp

118

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **2.0”**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

119

- *As-Built Description:*

Side slopes more than 1:10 (10%).

- *As-Built:* **13.0% and 18.0%**
- *Proposed Solution:*

Modify curb ramp. Demolish side slopes and replace with 1:10 side slopes if 48" level top landing is provided.

PCODE **EH05A**
ADAAG 91 **4.7.5**
ADA 2010 **406.3**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.2**

Mitigated:
○ YES
◉ NO

2 JOB $6,000 **$12,000**

○ Staff Only

Priority 1
Severity 2

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Path Throughout

Walk

120

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **Up to 13.0%**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

- ***Notes:***

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

2400 SF $75 **$180,000**

○ Staff Only

Priority 1

Severity 3

The entire path is defined by noncompliant running slopes, cross slopes to 8.0% and 3.0" high level changes that appear to be caused by tree roots which are heaving the sidewalks.

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Mid Section Curb Ramp

Cross Slope

122

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **11.3%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.2**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

20 SF $75 **$1,500**

○ Staff Only

Priority 1
Severity 1

Curb Ramp

121

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.6%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Multiple compliance issues.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Curb Ramp					
125	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **9.9%** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH02A** *ADAAG 91* **4.7.2** *ADA 2010* **406.1** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**
123	• *As-Built Description:* Transition from curb ramp to gutter does not have a smooth transition. • *As-Built:* **3.0”** • *Proposed Solution:* Grind lip.	*PCODE* **EH02D** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 1

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
124	• *As-Built Description:* Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20). • *As-Built:* **6.8%** • *Proposed Solution:* Modify road/gutter slopes. Demolish existing and provide new curb ramp.	*PCODE* **EH02E** *ADAAG 91* **4.7.2** *ADA 2010* **406.2** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.5.8** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,750	**$3,750**

○ Staff Only

Priority 1

Severity 4

127	• *As-Built Description:* Side slopes more than 1:10 (10%). • *As-Built:* **14.0% and 20.0%** • *Proposed Solution:* Modify curb ramp. Demolish side slopes and replace with 1:10 side slopes if 48" level top landing is provided.	*PCODE* **EH05A** *ADAAG 91* **4.7.5** *ADA 2010* **406.3** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$6,000	**$6,000**

○ Staff Only

Priority 1

Severity 1

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
126	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Curb Ramp Sunset

Curb Ramp

128

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.9%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 4

Multiple compliance issues.

129

- *As-Built Description:*

Curb ramp or 48" level space at bottom of ramp not within marked crosswalk.

- *Proposed Solution:*

Modify marked crossing; remove old lines & paint new lines at crosswalk.

- ***Notes:***

PCODE **EH09**
ADAAG 91 **4.7.9 + 10**
ADA 2010 **406.5**
CBC 2007 **1127B.5.9**
CBC 2019 **11B-406.5.9**

Mitigated:
○ YES
◉ NO

5 LF $300 **$1,500**

○ Staff Only

Priority 1
Severity 1

Bottom turning space 7.0% slope.

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
130	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	4	JOB	$300	**$1,200**

○ Staff Only

Priority 1

Severity 2

Conceptual Costs for **Floor:** On-site **$229,800.00**

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$229,800.00**

Facility: **Sunset Park** Part: **Exterior** Floor: **On-site**

Address: **Sunset Avenue and Accornero Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Sunset Park					**$229,800.00**

Access Compliance Survey Report

Vernon McCullough Fresno River Trail

Along Fresno River

Facility #: P11

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Accessible Route

2198

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

120 LF $135 **$16,200**

○ Staff Only

Priority 1
Severity 3

At trash cans and other accessible elements along the trail the unimproved surface does not appear to be firm. The clear floor space at these elements typically has slopes greater than 2.1%.

Cross Slope

1992

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **15.0%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

80 SF $75 **$6,000**

○ Staff Only

Priority 1
Severity 1

Collapsing asphalt causes cross slopes >2.0% and level changes >0.5".

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2201	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Roughly 8.0%** • *Proposed Solution:* Modify cross slope. • ***Notes:***	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	400	SF	$75	**$30,000**

○ Staff Only

Priority 1

Severity 2

Sunken asphalt at the side of the trail creates noncompliant slopes and level changes. There are 48.0” of compliant slopes to the side of these areas. Consider whether future dividing lines may put the noncompliant slopes in one of the lanes or whether the slopes are hazardous to people who do not see them.

Floor or Ground Surface

2202	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **Gaps to 3.0” wide and 3.0” deep.** • *Proposed Solution:* Fill gaps. • ***Notes:***	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	600	LF	$60	**$36,000**

○ Staff Only

Priority 1

Severity 2

Cracks nearly identical to the one shown here appear ubiquitous along the entire trail. There are also potholes up to 6.0” deep and 10.0” wide along the path and particularly at the edges of the path.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2010	**Protrusion Limits** • *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation. • ***Notes:***	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	60	JOB	$150	**$9,000**

○ Staff Only

Priority 1

Severity 2

Limbs above the walking surface are <80.0" high throughout the trail.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 At Rotary Park

Changes in Level

1984

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **0.5" not beveled**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 SF $63 **$504**

○ Staff Only

Priority 1
Severity 4

1985

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 SF $63 **$504**

○ Staff Only

Priority 1
Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1987	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **Gaps. 2.0" deep.** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level. • ***Notes:*** **Tripping hazard.**	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	5	SF	$150	**$750**
1988	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **Gaps 3.0" deep and 3.0" wide.** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level. • ***Notes:*** **Tripping hazard.**	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	5	SF	$150	**$750**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 2

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1990	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **1.0" at public entrance from fairgrounds** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	6	LF	$63	**$378**

○ Staff Only

Priority 1

Severity 4

Door

1989	• *As-Built Description:* Surface of required maneuvering clearance at door slopes more than 1/4":12" (2.0%). • *As-Built:* **2.8% at doorway with out a door to fairgrounds.** • *Proposed Solution:* Modify surface slope at door.	*PCODE* **ID11** *ADAAG 91* **4.13.6** *ADA 2010* **404.2.4.4** *CBC 2007* **1133B.2.4** *CBC 2019* **11B-404.2.4** **Mitigated:** ○ YES ◉ NO	30	SF	$120	**$3,600**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

1991

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 1

Collects water.

0

Walk

1986

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **5.5% running slope**
  3.1% cross slope
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 At N Schnoor

Accessible Route

1994

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

20 LF $135 **$2,700**

○ Staff Only

Priority 1
Severity 3

Not firm.

Changes in Level

1998

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Gaps. Level changes. Uneven.**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 SF $63 **$1,260**

○ Staff Only

Priority 1
Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2190	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **To 1.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level. • ***Notes:***	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	16	LF	$63	**$1,008**

○ Staff Only

Priority 1

Severity 4

At curb cuts and where asphalt meets concrete on both sides of Schnoor.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2192	• *As-Built Description:* Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route. • *As-Built:* **2.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EF03** *ADAAG 91* **4.3.8** *ADA 2010* **403.4** *CBC 2007* **1133B.7.4** *CBC 2019* **11B-403.4** **Mitigated:** ○ YES ◉ NO	4	SF	$63	**$252**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
1993	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **6.0% slope adjacent to benches** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	24	SF	$75	**$1,800**
1995	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Clear floor space at elements slopes 3.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	12	SF	$75	**$900**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
1997	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **8.0%** • *Proposed Solution:* Modify cross slope. • ***Notes:***	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	20	SF	$75	**$1,500**

○ Staff Only

Priority 1

Severity 2

There are approximately 36.0" between the 8.0% slopes and the dividing line.

2006	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **2.4% to 5.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	200	SF	$75	**$15,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2009	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 6.0%** • *Proposed Solution:* Modify cross slope. • ***Notes:***	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	150	SF	$75	**$11,250**

○ Staff Only

Priority 1

Severity 3

There are 48.0" level trail overall but the slopes reduce the level width on one side of the dividing line to <32.0".

Curb or Barrier

2004	• *As-Built Description:* A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface. • *Proposed Solution:* Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface. • ***Notes:***	*PCODE* **EB14** *ADAAG 91* **4.8.7** *ADA 2010* **405.9.2** *CBC 2007* **1133B.5.6** *CBC 2019* **11B-405.9.2** **Mitigated:** ○ YES ◉ NO	50	LF	$51	**$2,550**

○ Staff Only

Priority 1

Severity 4

Occurs both sides of Schnoor.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

2008

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

20 LF $81 **$1,620**

○ Staff Only

Priority 1

Severity 3

Protrusion Limits

2007

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1

Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Ramps

2002

- *As-Built Description:*

Ramp: Pavement dislocation creates abrupt change in level exceeding 1/2" in ramp.

- *As-Built:* **Gap.**
- *Proposed Solution:*

Fill gaps.

PCODE **EB04**
ADAAG 91 **4.5.2**
ADA 2010 **303.4**
CBC 2007 **1133B.7.1**
CBC 2019 **11B-405.4**

Mitigated:
○ YES
◉ NO

10 LF $27 **$270**

○ Staff Only

Priority 1
Severity 1

Slope

2003

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.4%**
- *Proposed Solution:*

Grind surface.

- ***Notes:***

PCODE **EB02**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-405.2**

Mitigated:
○ YES
◉ NO

20 SF $120 **$2,400**

○ Staff Only

Priority 1
Severity 4

Both sides of Schnoor.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2001	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **2.9%** • *Proposed Solution:* Grind surface. • ***Notes:***	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	80	SF	$150	**$12,000**

○ Staff Only

Priority 1

Severity 4

Both sides of Schnoor.

Top and Bottom Extension at

1999	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *As-Built:* **Extension is above 4.0% slope.** • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece). • ***Notes:***	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	3	JOB	$510	**$1,530**

○ Staff Only

Priority 1

Severity 3

Both sides of Schnoor.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2000	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	2	JOB	$510	**$1,020**
2005	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *As-Built:* **11.0" to 12.0" to center of down pipe** • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	3	JOB	$510	**$1,530**

○ Staff Only

Priority 1

Severity 1

○ Staff Only

Priority 1

Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
1996	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **5.5%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	150	SF	$75	**$11,250**
2191	• *As-Built Description:* Walk more than 36" but less than 48" wide (required in CA only). • *As-Built:* **46.5"** • *Proposed Solution:* Enlarge width of walk to 48".	*PCODE* **EF08** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-403.5.1.3** **Mitigated:** ○ YES ◉ NO	60	SF	$135	**$8,100**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Between N Schnoor and N Granada

Changes in Level

2206

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **3.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

4 SF $63 **$252**

○ Staff Only

Priority 1
Severity 2

Cross Slope

2011

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

800 SF $75 **$60,000**

○ Staff Only

Priority 1
Severity 3

Cannot circumnavigate slopes.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2204	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **To 6.4%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	600	SF	$75	**$45,000**
2209	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **To 4.8%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	1000	SF	$75	**$75,000**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

2207

- *As-Built Description:*

Where only one drinking fountain is provided per floor: Fountain is not accessible to individuals who use wheelchairs, or to those who have difficulty bending or stooping.

- *Proposed Solution:*

Provide additional fountain or hi-lo combination fountain.

PCODE **IA01A**
ADAAG 91 **4.1.3(10)(a)**
ADA 2010 **211.1**
CBC 2007 **1115B.4.6.1**
CBC 2019 **11B-211.1**

Mitigated:
○ YES
◉ NO

1 JOB $6,000 **$6,000**

○ Staff Only

Priority 1
Severity 2

2208

- *As-Built Description:*

Drinking fountain lacks protection for visually impaired persons.

- *Proposed Solution:*

Provide cane-detectable rails.

PCODE **IA05C**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1115B.4.6.3**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 3

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Non-Fixed Desk

2210

- *As-Built Description:*

Accessible non-fixed table or desk (top 28" to 34" high; knee space at least 27" high x 19" deep x 30" wide) not provided.

- *As-Built:* **16 seats, 0 accessible provided.**
- *Proposed Solution:*

Provide table or desk with accessible dimensions when purchasing new furniture.

PCODE **IN02A**
ADAAG 91 **4.32.3 & .4**
ADA 2010 **306.1**
CBC 2007 **1122B.3 & 4**
CBC 2019 **11B-306.1 & 11B-902.3**

Mitigated:
○ YES
◉ NO

1 JOB $4,800 **$4,800**

○ Staff Only

Priority 1
Severity 2

Signage

2205

- *As-Built Description:*

Signage: Characters don't have width to height ratio between 3:5 and 1:1, or stroke width to height ratio between 1:5 and 1:10.

- *Proposed Solution:*

Provide compliant signage.

- ***Notes:***

PCODE **SA02**
ADAAG 91 **4.30.2**
ADA 2010 **703.2.4**
CBC 2007 **1117B.5.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

1 JOB $270 **$270**

○ Staff Only

Priority 1
Severity 4

Consider installing an additional sign with compliant font and including information on the website that is available to people with vision impairments.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 Ramp at Riverpointe and Riverview

Change in Direction

2013

- *As-Built Description:*

Landing at change of direction not 60" minimum by 72" minimum in the direction of downward travel from the upper ramp run.

- *As-Built:* **64.0" at 90 degree turn**
- *Proposed Solution:*

Modify landing at change of direction to 60" x 72".

- ***Notes:***

PCODE **EB08**
ADAAG 91 **4.8.4(3)**
ADA 2010 **405.7.4**
CBC 2007 **1133B.5.4**
CBC 2019 **11B-405.7.4**

Mitigated:

○ YES
◉ NO

30 SF $135 **$4,050**

○ Staff Only

Priority 1
Severity 4

This element complies with 1991 ADAAG and the 2010 ADAS. This element does not comply with the dimensional requirements in the 1981 to the current CBC.

Slope

2012

- *As-Built Description:*

Level 2% max. landing for ramp not provided.

- *As-Built:* **2.6%**
- *Proposed Solution:*

Grind surface.

PCODE **EB05A**
ADAAG 91 **4.8.4**
ADA 2010 **405.7.1**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.7.1**

Mitigated:

○ YES
◉ NO

20 SF $300 **$6,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2014	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **4.5%** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	10	SF	$300	**$3,000**

○ Staff Only

Priority 1

Severity 3

Top and Bottom Extension at

2015	• *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *As-Built:* **Extension is above a 2.8% slope.** • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$510	**$510**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Granada to Caitlan

Changes in Level

2196

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

10 SF $63 **$630**

○ Staff Only

Priority 1
Severity 4

2197

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

10 SF $63 **$630**

○ Staff Only

Priority 1
Severity 3

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Cross Slope

2199

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **To 3.7%**
- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

1000 SF $75 **$75,000**

○ Staff Only

Priority 1

Severity 4

Typically there are 48.0" wide walks with cross lives less than 2.0%. But navigating the compliant cross slopes often appears to be difficult.

Curb Ramp

2203

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.6% and 15.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:

○ YES
◉ NO

2 JOB $7,500 **$15,000**

○ Staff Only

Priority 1

Severity 2

Occurs on both sides of Granada. Also there are cross slopes >2.1%, noncompliant flares, lips at the bottom noncompliant gutter slopes and no domes. The surveyor saw people using these curb ramps. Consider whether they are intended for pedestrian travel.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Detectable Warning					
2195	• *As-Built Description:* 36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element. • *Proposed Solution:* Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.	*PCODE* **EG09** *ADAAG 91* **4.29.5** *CBC 2007* **1133B.8.5** *CBC 2019* **11B-705.1.2.5** **Mitigated:** ○ YES ◉ NO	10	LF	$81	**$810**

○ Staff Only

Priority 1

Severity 3

	Floor or Ground Surface					
2200	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **Gaps 1.0" wide** • *Proposed Solution:* Fill gaps	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	60	LF	$240	**$14,400**

○ Staff Only

Priority 1

Severity 2

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Ramp

2194

- *As-Built Description:*

Slope not steep but greater than 1:20 (5.0 %) without handrails.

- *Proposed Solution:*

Provide handrails for ramp.

PCODE **EB03**
ADAAG 91 **4.8.1**
ADA 2010 **405.1**
CBC 2007 **1133B.5.5.1**
CBC 2019 **11B-405.8**

Mitigated:
○ YES
◉ NO

50 LF $225 **$11,250**

○ Staff Only

Priority 1
Severity 2

Slope

2193

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.3%**
- *Proposed Solution:*

Demolish existing and provide new ramp with handrails.

PCODE **EB02**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-405.2**

Mitigated:
○ YES
◉ NO

250 SF $300 **$75,000**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Gateway to Tulare

Changes in Level

2280

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

40 LF $63 **$2,520**

○ Staff Only

Priority 1
Severity 3

Cross Slope

2252

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

5000 SF $75 **$375,000**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

2237

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **10.3%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

2 JOB $7,500 **$15,000**

○ Staff Only

Priority 1
Severity 4

No domes. Lip at street. Large gaps at the top.

2251

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **7.7%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

2 JOB $3,750 **$7,500**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Detectable Warning

2281

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

- ***Notes:***

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:

○ YES
◉ NO

25 LF $81 **$2,025**

○ Staff Only

Priority 1

Severity 3

Near Tulare.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Ramp at Sharon and Riverside

Curb or Barrier

2239

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

60 LF $51 **$3,060**

○ Staff Only

Priority 1
Severity 4

Handrail

2240

- *As-Built Description:*

Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only).

- *Proposed Solution:*

Provide new guards, including handrail at ramp.

PCODE **ED08**
CBC 2007 **1133B.5.7**
CBC 2019 **Section 1013.2; 1013.3**

Mitigated:
○ YES
◉ NO

50 LF $360 **$18,000**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

2242

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

20 LF $285 **$5,700**

○ Staff Only

Priority 1
Severity 2

Height

2243

- *As-Built Description:*

Handrail gripping surface top not mounted between 34" and 38" above ramp surface or stair nosings.

- *As-Built:* **The handrail is not at consistent heightsfrom the surface.**
- *Proposed Solution:*

Remove existing and provide new handrail.

PCODE **ED02**
ADAAG 91 **4.9.4(5)**
ADA 2010 **505.4**
CBC 2007 **1133B.4.2.1 &**
CBC 2019 **B.5.5.1**
11B-505.4

Mitigated:
○ YES
◉ NO

200 LF $225 **$45,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Slope

2244

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **9.3%**
- *Proposed Solution:*

Demolish existing and provide new ramp with handrails.

PCODE **EB02**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-405.2**

Mitigated:

○ YES
◉ NO

10 SF $300 **$3,000**

○ Staff Only

Priority 1

Severity 4

2241

- *As-Built Description:*

Level 2% max. landing for ramp not provided.

- *As-Built:* **The landings are 48.0" to 55.0" long and/or slope 8%**
- *Proposed Solution:*

Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%

- ***Notes:***

PCODE **EB05A**
ADAAG 91 **4.8.4**
ADA 2010 **405.7.1**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.7.1**

Mitigated:

○ YES
◉ NO

70 SF $300 **$21,000**

○ Staff Only

Priority 1

Severity 2

Pcode there are no landings in a ramp run that is approximately 70.0' long with a rise approximately 90.0"

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2238	**Top and Bottom Extension at** • *As-Built Description:* Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp. • *As-Built:* **Extension is above slope** • *Proposed Solution:* Provide ramp handrail extension (cost for each extension piece).	*PCODE* **ED05** *ADAAG 91* **4.8.5(2)** *ADA 2010* **505.10.1** *CBC 2007* **1133B.4.2.2 &** *CBC 2019* **1133B.5.5.1** **11B-505.10.1** **Mitigated:** ○ YES ◉ NO	1	JOB	$510	**$510**

○ Staff Only

Priority 1

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

8 Ramp at East Side of Gateway

Cross Slope

2247

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

70 SF $75 **$5,250**

○ Staff Only

Priority 1
Severity 4

Curb or Barrier

2246

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2248	• *As-Built Description:* A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface. • *Proposed Solution:* Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.	*PCODE* **EB14** *ADAAG 91* **4.8.7** *ADA 2010* **405.9.2** *CBC 2007* **1133B.5.6** *CBC 2019* **11B-405.9.2** **Mitigated:** ○ YES ◉ NO	40	LF	$51	**$2,040**

○ Staff Only

Priority 1

Severity 4

Handrail

2250	• *As-Built Description:* Guards (42" high) not provided at side of ramp or landing where drop-off to adjacent grade or floor exceeds 30" height (California building code requirement only). • *As-Built:* **39.0”** • *Proposed Solution:* Provide new guards, including handrail at ramp.	*PCODE* **ED08** *CBC 2007* **1133B.5.7** *CBC 2019* **Section 1013.2; 1013.3** **Mitigated:** ○ YES ◉ NO	30	LF	$360	**$10,800**

○ Staff Only

Priority 1

Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

2249

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

- ***Notes:***

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

70 LF $285 **$19,950**

○ Staff Only

Priority 1
Severity 2

The handrails at the top and bottom of the ramp do not extend to the existing level walks.

Top and Bottom Extension at

2245

- *As-Built Description:*

Ramp handrail does not extend horizontally 12" past top and / or bottom of ramp.

- *Proposed Solution:*

Provide ramp handrail extension (cost for each extension piece).

PCODE **ED05**
ADAAG 91 **4.8.5(2)**
ADA 2010 **505.10.1**
CBC 2007 **1133B.4.2.2 &**
CBC 2019 **1133B.5.5.1**
11B-505.10.1

Mitigated:
○ YES
◉ NO

2 JOB $510 **$1,020**

○ Staff Only

Priority 1
Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

10 Ramp West of D

Changes in Level

2254

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

8 SF $63 **$504**

○ Staff Only

Priority 1
Severity 4

Cross Slope

2255

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *Proposed Solution:*

Modify cross slope.

- ***Notes:***

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

700 SF $300 **$210,000**

○ Staff Only

Priority 1
Severity 3

Pcode 3.7% cross slope on ramp.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb or Barrier

2257

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

Handrails

2256

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

- ***Notes:***

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

200 LF $285 **$57,000**

○ Staff Only

Priority 1
Severity 2

The rail on the right is 42.0" AFF.

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
2253	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **5.7%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	60	SF	$75	**$4,500**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

11 Ramp East of D

Cross Slope

2263

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **5.2%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

800 SF $75 **$60,000**

○ Staff Only

Priority 1
Severity 3

Curb or Barrier

2261

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

60 LF $51 **$3,060**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

2262

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

- ***Notes:***

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

200 LF $285 **$57,000**

○ Staff Only

Priority 1
Severity 2

The rail is 42.0" AFF.

Slope

2259

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **To 9.2%**
- *Proposed Solution:*

Grind surface.

PCODE **EB02**
ADAAG 91 **4.8.2**
ADA 2010 **405.2**
CBC 2007 **1133B.5.3**
CBC 2019 **11B-405.2**

Mitigated:
○ YES
◉ NO

50 SF $300 **$15,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2258	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **4.3%** • *Proposed Solution:* Alter top landing.	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	35	SF	$300	**$10,500**
2260	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **To 3.2%** • *Proposed Solution:* Alter surface.	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	24	SF	$300	**$7,200**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

12 Ramp West of Lake

Cross Slope

2270

- *As-Built Description:*

Ramp: Cross slope more than 1/4":12" (2%).

- *As-Built:* **2.4%**
- *Proposed Solution:*

Modify ramp's cross slope.

PCODE **EB15**
ADAAG 91 **4.8.6**
ADA 2010 **405.3**
CBC 2007 **1133B.5.3.1**
CBC 2019 **11B-405.3**

Mitigated:
○ YES
◉ NO

200 SF $300 **$60,000**

○ Staff Only

Priority 1
Severity 4

Curb or Barrier

2265

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

2266

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

140 LF $285 **$39,900**

○ Staff Only

Priority 1
Severity 2

Ramp

2267

- *As-Built Description:*

Ramp has more than 30" vertical rise without landing(s).

- *As-Built:* **Approximately 50" rise.**
- *Proposed Solution:*

Modify ramp to provide landings at increments of 30" maximum rise.

- ***Notes:***

PCODE **IJ05E**
ADAAG 91 **4.8.2**
ADA 2010 **405.6**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.6**

Mitigated:
○ YES
◉ NO

50 SF $60 **$3,000**

○ Staff Only

Priority 1
Severity 1

Lower ramp run approximately 50' long.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Slope					
2268	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **8.6%** • *Proposed Solution:* Demolish existing and provide new ramp with handrails.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	20	SF	$300	**$6,000**
						○ Staff Only
						Priority 1
						Severity 4
2264	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **3.3%** • *Proposed Solution:* Alter surface.	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	30	SF	$300	**$9,000**
						○ Staff Only
						Priority 1
						Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2269	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **3.2%** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	80	SF	$300	**$24,000**

○ Staff Only

Priority 1

Severity 4

Walk

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2271	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **7.0%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	500	SF	$75	**$37,500**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

13 Ramp East of Lake

Curb or Barrier

2275

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

20 LF $51 **$1,020**

○ Staff Only

Priority 1
Severity 4

Handrails

2274

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

200 LF $285 **$57,000**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Slope					
2276	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **9.6%. 5.5% cross slopes.** • *Proposed Solution:* Demolish existing and provide new ramp with handrails.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	700	SF	$300	**$210,000**
						○ Staff Only
						Priority 1
						Severity 4
2272	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **Top landing slopes 5.0%.** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	40	SF	$300	**$12,000**
						○ Staff Only
						Priority 1
						Severity 3

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2273	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **Top landing slopes 5.0%.** • *Proposed Solution:* Alter surface.	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	40	SF	$300	**$12,000**

○ Staff Only

Priority 1

Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

14 Curb Ramp at Tulare

Curb Ramp

2277

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Grind lip.

- ***Notes:***

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 1

Intended for pedestrian traffic?

2279

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **7.3%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Intended for pedestrian traffic?

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2278	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Conceptual Costs for **Floor:** On-site **$2,038,977.00**

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$2,038,977.00**

Facility: **Vernon McCullough Fresno River** Part: **Exterior** Floor: **On-site**

Address: **Along Fresno River** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Vernon McCullough Fresno River Trail					**$2,038,977.00**

Access Compliance Survey Report

Granada Linear Park

Granada Avenue, between Glade and Cleveland

Facility #: P2

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Granada Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Granada Avenue, between Glade and Cleveland** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 General

Cross Slope

2219

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **To 3.4%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1
Severity 4

Detectable Warning

2218

- *As-Built Description:*

36" wide band of truncated domes not provided at walkway or crossing adjoining a vehicular way, if surfaces are not separated by a curb, railing, or other element.

- *Proposed Solution:*

Provide 36" wide, contrasting color, band of truncated domes between pedestrian and vehicular area.

PCODE **EG09**
ADAAG 91 **4.29.5**
CBC 2007 **1133B.8.5**
CBC 2019 **11B-705.1.2.5**

Mitigated:
○ YES
◉ NO

15 LF $81 **$1,215**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Drinking Fountain					
2215	• *As-Built Description:* Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain). • *As-Built:* **26.25"** • *Proposed Solution:* Provide new, accessible fountain.	*PCODE* **IA02** *ADAAG 91* **4.15.5(1)** *ADA 2010* **602.2** *CBC 2007* **1115B.4.6.2** *CBC 2019* **11B-602.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$9,600	**$9,600**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 2				
2216	• *As-Built Description:* Drinking fountain lacks protection for visually impaired persons. • *Proposed Solution:* Provide cane-detectable rails.	*PCODE* **IA05C** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1115B.4.6.3** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$1,500	**$1,500**
		 ○ Staff Only ***Priority*** 3 ***Severity*** 3				

Facility: **Granada Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Granada Avenue, between Glade and Cleveland** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Protrusion Limits					
2217	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	10	JOB	$90	**$900**
	○ Staff Only					
					Priority	**1**
					Severity	**2**
2220	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *As-Built:* **Telephone pole guy wire 64.0" to 79.0" high** • *Proposed Solution:* Remove/relocate protruding object. Patch existing surface.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$300	**$300**
	○ Staff Only					
					Priority	**1**
					Severity	**2**

Conceptual Costs for **Floor:** On-site **$28,515.00**

Facility: **Granada Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Granada Avenue, between Glade and Cleveland** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$28,515.00**

Facility: **Granada Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Granada Avenue, between Glade and Cleveland** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Granada Linear Park					**$28,515.00**

Access Compliance Survey Report

Knox Park

Corner of Knox & A Streets

Facility #: P3

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Knox Park** Part: **Exterior** Floor: **On-site**

Address: **Corner of Knox & A Streets** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Playground and Routes

Surfacing

1741

- *As-Built Description:*

Ground surface complies with ASTM F1951 connecting to play equipment is not provided. Ground surface shall be inspected and maintained regularly and frequently to ensure continued compliance with ASTM F1951

- *Proposed Solution:*

Provide required resilient surfacing around play structure. Clear width of accessible routes connecting play components shall provide a clear width comply with section 11B-1008.2.4.

- ***Notes:***

Shredded tire surface.

PCODE **OA01**
ADAAG 91 **36 CFR Part**
ADA 2010 **1191**
1008.2.6
CBC 2007 **DSA 99-02**
CBC 2019 **11B-1008.2.6**

Mitigated:
○ YES
◉ NO

500 SF $27 **$13,500**

○ Staff Only

Priority 1
Severity 4

Tread Surface

1740

- *As-Built Description:*

The leading 2" of the tread does not have visual contrast of dark–on–light or light–on–dark from the remainder of the tread.

- *Proposed Solution:*

Provide contrasting color strips at all exterior stair treads.

PCODE **EC02**
ADA 2010 **504.4**
CBC 2007 **1133B.4.4**
CBC 2019 **11B-504.4.1**

Mitigated:
○ YES
◉ NO

12 LF $27 **$324**

○ Staff Only

Priority 1
Severity 4

Conceptual Costs for **Floor:** On-site **$13,824.00**

Facility: **Knox Park** Part: **Exterior** Floor: **On-site**

Address: **Corner of Knox & A Streets** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$13,824.00**

Facility: **Knox Park** Part: **Exterior** Floor: **On-site**

Address: **Corner of Knox & A Streets** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Knox Park					**$13,824.00**

Access Compliance Survey Report

Laurel Trail

Laurel Street, North of Sunset Avenue

Facility #: P4

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Laurel Trail** Part: **Exterior** Floor: **On-site**

Address: **Laurel Street, North of Sunset Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 General

Cross Slope

2284

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **To 3.3%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

700 SF $75 **$52,500**

○ Staff Only

Priority 1
Severity 4

Curb Ramp

2282

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **14.0%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

Adjacent to gutter.

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Drinking Fountain

2283

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain).

- *As-Built:* **26.0"**
- *Proposed Solution:*

Provide new, accessible fountain.

PCODE **IA02**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $9,600 **$9,600**

○ Staff Only

Priority 3
Severity 2

2285

- *As-Built Description:*

Wall- and post-mounted cantilevered units: Knee space not provided at drinking fountain (27" high, 8" deep, 30" wide from front of drinking fountain).

- *As-Built:* **26.4"**
- *Proposed Solution:*

Provide new, accessible fountain.

PCODE **IA02**
ADAAG 91 **4.15.5(1)**
ADA 2010 **602.2**
CBC 2007 **1115B.4.6.2**
CBC 2019 **11B-602.2**

Mitigated:
○ YES
◉ NO

1 JOB $9,600 **$9,600**

○ Staff Only

Priority 3
Severity 2

Conceptual Costs for **Floor:** On-site **$79,200.00**

Facility: **Laurel Trail** Part: **Exterior** Floor: **On-site**

Address: **Laurel Street, North of Sunset Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$79,200.00**

Facility: **Laurel Trail** Part: **Exterior** Floor: **On-site**

Address: **Laurel Street, North of Sunset Avenue** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Laurel Trail					**$79,200.00**

Access Compliance Survey Report

Maple Court

T-Instersection of Maple Court and Maple Street

Facility #: P5

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Maple Court** Part: **Exterior** Floor: **On-site**

Address: **T-Instersection of Maple Court and Maple Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 All

Curb Ramp

131

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

- ***Notes:***

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:

○ YES
◉ NO

2 JOB $7,500 **$15,000**

○ Staff Only

Priority 1

Severity 3

No accessible access from the street parking at either end of the park. Completely blocked by curbs.

Conceptual Costs for **Floor:** On-site **$15,000.00**

Facility: **Maple Court** Part: **Exterior** Floor: **On-site**

Address: **T-Instersection of Maple Court and Maple Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$15,000.00**

Facility: **Maple Court** Part: **Exterior** Floor: **On-site**

Address: **T-Instersection of Maple Court and Maple Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Maple Court					**$15,000.00**

Access Compliance Survey Report

Olive Outlots

Olive Avenue & Grove Street

Facility #: P6

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 General

General Note

1749

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 1

Parking is street parking across the street with typical cross slopes and no striping. 0

Protrusion Limits

1748

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:

○ YES
◉ NO

19 JOB $300 **$5,700**

○ Staff Only

Priority 1

Severity 2

Conceptual Costs for **Floor:** On-site **$5,700.00**

Facility: **Olive Outlots** Part: **Exterior** Floor: **On-site**

Address: **Olive Avenue & Grove Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$5,700.00**

Facility: **Olive Outlots** Part: **Exterior** Floor: **On-site**

Address: **Olive Avenue & Grove Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Olive Outlots					**$5,700.00**

Access Compliance Survey Report

Riverside Park

Riverside Drive, between N. D Street and Lake Street

Facility #: P7

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Accessible Route

517

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

50 LF $135 **$6,750**

○ Staff Only

Priority 1
Severity 3

Occurs throughout the park at trash cans and benches.

Changes in Level

514

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **Gaps and level changes to 2.0”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

100 LF $63 **$6,300**

○ Staff Only

Priority 1
Severity 3

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Cross Slope					
513	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **Up to 5.0%** • *Proposed Solution:* Modify cross slope.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	3000	SF	$75	**$225,000**
	○ Staff Only ***Priority*** 1 ***Severity*** 3					
518	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **4.8% slope at trash can clear floor space. Occurs throughout the park at trash cans. Also occurs at trash cans** • *Proposed Solution:* Modify cross slope, or relocate trash cans.	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	50	SF	$75	**$3,750**
	○ Staff Only ***Priority*** 1 ***Severity*** 3					

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
537	• *As-Built Description:* Cross slope more than 1":48" (2.083%). • *As-Built:* **10.0%** • *Proposed Solution:* Modify cross slope. • ***Notes:***	*PCODE* **EF07** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.1.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	200	SF	$75	**$15,000**

○ Staff Only

Priority 1

Severity 1

11B-246.7 Trails and paths. Trails, paths and nature walk areas, or portions of them, shall be constructed with gradients permitting at least partial use by wheelchair occupants. Buildings and other functional areas shall be served by paths or walks with firm and stable surfaces.

Protrusion Limits

539	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	20	JOB	$300	**$6,000**

○ Staff Only

Priority 2

Severity 2

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Ramp at D St

Curb or Barrier

510

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

50 LF $51 **$2,550**

○ Staff Only

Priority 1
Severity 4

Handrails

511

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

- ***Notes:***

The right side is a guard at 42.0" AFF.

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1 & .5.5**
CBC 2019 **11B-505.2**

Mitigated:
○ YES
◉ NO

250 LF $285 **$71,250**

○ Staff Only

Priority 1
Severity 2

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Ramps					
512	• *As-Built Description:* Ramp: Pavement dislocation creates abrupt change in level exceeding 1/2" in ramp. • *As-Built:* **1.0”** • *Proposed Solution:* Remove, replace or repair area of pavement sufficient to correct abrupt change in level.	*PCODE* **EB04** *ADAAG 91* **4.5.2** *ADA 2010* **303.4** *CBC 2007* **1133B.7.1** *CBC 2019* **11B-405.4** **Mitigated:** ○ YES ◉ NO	4	SF	$27	**$108**
	Slope					
509	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **3.4% to 4.3%** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2% • ***Notes:***	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	150	SF	$300	**$45,000**

○ Staff Only

Priority 1

Severity 3

○ Staff Only

Priority 1

Severity 3

Occurs at every landing.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 D Street Entrance

Curb Ramp

516

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **13.2%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Multiple compliance issues. Lip at bottom. 7.0% gutter slope. 13.0% flares. No domes. 2.0" level change in top landing and 3.5% slope in top top landing. There is no 48.0" turning space at the bottom that is outside of traffic and the flares are not 24.0" inside of the crosswalk lines.

Fixed Bench

519

- *As-Built Description:*

Clear and level floor or ground space (30" x 48") not overlapping with other clear space requirements, is not provided at least one end of the bench.

- *Proposed Solution:*

Provide and position a clear and level floor or ground space to allow wheelchair users to be seated shoulder-to-shoulder with an individual seated on the bench.

- ***Notes:***

PCODE **NO07**
ADAAG 91 **4.32.2**
ADA 2010 **903.2**
CBC 2007 **1118B.4**
CBC 2019 **11B-903.2**

Mitigated:
○ YES
◉ NO

1 JOB $1,500 **$1,500**

○ Staff Only

Priority 1
Severity 2

Parks best practice. No accessible bench and no level transfer space adjacent to bench.

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Walk					
515	• *As-Built Description:* Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps. • *As-Built:* **5.9%** • *Proposed Solution:* Modify walk/sidewalk slope to 1:20 or less.	*PCODE* **EF01** *ADAAG 91* **4.3.7** *ADA 2010* **403.3** *CBC 2007* **1133B.7.3** *CBC 2019* **11B-403.3** **Mitigated:** ○ YES ◉ NO	50	SF	$75	**$3,750**

○ Staff Only

Priority 1

Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 N Lake Entrance

Curb Ramp

527

- *As-Built Description:*

Slope greater than 1:12 (8.3%).

- *As-Built:* **11.2%**
- *Proposed Solution:*

Demolish existing and provide new curb ramp.

- ***Notes:***

PCODE **EH02A**
ADAAG 91 **4.7.2**
ADA 2010 **406.1**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.2.1**

Mitigated:
○ YES
◉ NO

1 JOB $7,500 **$7,500**

○ Staff Only

Priority 1
Severity 3

Multiple compliance issues. 12.0% gutter slope. 6.0% slope at top landing. Lip at gutter. No domes. 14.0% flare. No 48.0" turning space outside of traffic at bottom. Crosswalk markings are not 24" outside flares. Gaps and level changes on ramp surface.

Walk

526

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **8.5%**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

100 SF $75 **$7,500**

○ Staff Only

Priority 1
Severity 4

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 N Lake Ramp

Cross Slope

533

- *As-Built Description:*

Ramp: Cross slope more than 1/4":12" (2%).

- *Proposed Solution:*

Modify ramp's cross slope.

- ***Notes:***

PCODE **EB15**
ADAAG 91 **4.8.6**
ADA 2010 **405.3**
CBC 2007 **1133B.5.3.1**
CBC 2019 **11B-405.3**

Mitigated:
○ YES
◉ NO

20 SF $300 **$6,000**

○ Staff Only

Priority 1
Severity 4

Ramp cross slope 3.0%.

Curb or Barrier

529

- *As-Built Description:*

A curb or barrier has not been provided that blocks the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- *Proposed Solution:*

Provide a curb or barrier that prevents the passage of a 4-inch diameter sphere, where any portion of the sphere is within 4 inches of the finish floor or ground surface.

- ***Notes:***

PCODE **EB14**
ADAAG 91 **4.8.7**
ADA 2010 **405.9.2**
CBC 2007 **1133B.5.6**
CBC 2019 **11B-405.9.2**

Mitigated:
○ YES
◉ NO

30 LF $51 **$1,530**

○ Staff Only

Priority 1
Severity 4

This element complied with Safe Harbor and CBC if altered or constructed before March 15, 2012.

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Handrails

528

- *As-Built Description:*

Handrail not provided at stairs or ramp, required on both sides (not required at curb ramps or adjacent to seating areas).

- *Proposed Solution:*

Provide new handrail for each side including extensions.

- ***Notes:***

PCODE **ED01**
ADAAG 91 **4.8.5 & 4.9.4**
ADA 2010 **505.2**
CBC 2007 **1133B.4.1.1**
CBC 2019 **& .5.5**
11B-505.2

Mitigated:
○ YES
◉ NO

210 LF $285 **$59,850**

○ Staff Only

Priority 1
Severity 2

Right side is a 42.0" high guard.

Ramp

532

- *As-Built Description:*

Ramp has more than 30" vertical rise without landing(s).

- *Proposed Solution:*

Modify ramp to provide landings at increments of 30" maximum rise.

- ***Notes:***

PCODE **IJ05E**
ADAAG 91 **4.8.2**
ADA 2010 **405.6**
CBC 2007 **1133B.5.4.1**
CBC 2019 **11B-405.6**

Mitigated:
○ YES
◉ NO

420 SF $27 **$11,340**

○ Staff Only

Priority 1
Severity 1

Bottom ramp run 60.0 LF. Top run is 45.0 LF.

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Slope					
531	• *As-Built Description:* Slope greater than 1:12 (8.3%). • *As-Built:* **Up to 10.0%** • *Proposed Solution:* Demolish existing and provide new ramp with handrails.	*PCODE* **EB02** *ADAAG 91* **4.8.2** *ADA 2010* **405.2** *CBC 2007* **1133B.5.3** *CBC 2019* **11B-405.2** **Mitigated:** ○ YES ◉ NO	80	SF	$300	**$24,000**
530	• *As-Built Description:* Level 2% max. landing for ramp not provided. • *As-Built:* **2.5% to 4.0% at top, bottom and middle landing.** • *Proposed Solution:* Rebuild ramp to provide landings for each ramp run with slopes no greater than 2%	*PCODE* **EB05A** *ADAAG 91* **4.8.4** *ADA 2010* **405.7.1** *CBC 2007* **1133B.5.4.1** *CBC 2019* **11B-405.7.1** **Mitigated:** ○ YES ◉ NO	90	SF	$300	**$27,000**

○ Staff Only

Priority 1

Severity 4

○ Staff Only

Priority 1

Severity 3

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

5 Riverwalk Drive Entrances

Walk

525

- *As-Built Description:*

Walk: Slope greater than 1:20 (5.0%), and walk does not comply with requirements for ramps.

- *As-Built:* **40.0%**
- *Proposed Solution:*

Modify walk/sidewalk slope to 1:20 or less.

PCODE **EF01**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.3**
CBC 2019 **11B-403.3**

Mitigated:

○ YES
◉ NO

200 SF $75 **$15,000**

○ Staff Only

Priority 1

Severity 1

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

6 Riverwalk Drive and B St

Changes in Level

536

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

16 SF $63 **$1,008**

○ Staff Only

Priority 1
Severity 3

Curb Ramp

535

- *As-Built Description:*

Detectable warning not provided where pedestrian crosses vehicular area.

- *Proposed Solution:*

Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.

PCODE **EH07A**
ADAAG 91 **4.7.7**
ADA 2010 **705.1**
CBC 2007 **1127B.5.7**
CBC 2019 **11B-705.1.2.2**

Mitigated:
○ YES
◉ NO

1 JOB $750 **$750**

○ Staff Only

Priority 1
Severity 3

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

General Note

534

- *As-Built Description:*

Refer to notes for observation and recommendation.

- *Proposed Solution:*
- ***Notes:***

PCODE **GN01**

Mitigated:

○ YES
◉ NO

1 JOB

○ Staff Only

Priority 1

Severity 1

No accessible parking and verify City on street parking requirements. The Ninth Circuit found that, despite the lack of accessibility standards, on-street parking is a "normal function" of a city and therefore must be made accessible.

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

7 Austin Ave Entrance

Curb Ramp

522

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *As-Built:* **1.0"**
- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 2

523

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **7.7%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 4

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
524	• *As-Built Description:* Side slopes more than 1:10 (10%). • *As-Built:* **16.0%** • *Proposed Solution:* Modify curb ramp. Demolish side slopes and replace with 1:10 side slopes if 48" level top landing is provided.	*PCODE* **EH05A** *ADAAG 91* **4.7.5** *ADA 2010* **406.3** *CBC 2007* **1127B.5.3** *CBC 2019* **11B-406.2.2** **Mitigated:** ○ YES ◉ NO	2	JOB	$1,950	**$3,900**
520	• *As-Built Description:* Less than 48" level space at top not provided. • *Proposed Solution:* Demolish existing and provide new landing. • ***Notes:*** **Top landing slopes 4.7%.**	*PCODE* **EH05B** *ADAAG 91* **4.7.5; Fig.12(a)** *ADA 2010* **406.4** *CBC 2007* **1127B.5.4** *CBC 2019* **11B-406.5.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$3,000	**$3,000**

○ Staff Only

Priority 1

Severity 2

○ Staff Only

Priority 1

Severity 4

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
521	• *As-Built Description:* Detectable warning not provided where pedestrian crosses vehicular area. • *Proposed Solution:* Provide detectable warning surface (i.e. in-line truncated domes) at regular curb ramp.	*PCODE* **EH07A** *ADAAG 91* **4.7.7** *ADA 2010* **705.1** *CBC 2007* **1127B.5.7** *CBC 2019* **11B-705.1.2.2** **Mitigated:** ○ YES ◉ NO	1	JOB	$750	**$750**

○ Staff Only

Priority 1

Severity 3

Stairways

538	• *As-Built Description:* Exterior stair substantially out of compliance. • *Proposed Solution:* Provide complete new stair, 4 ft. wide with landing and handrails.	*PCODE* **EC09** *ADAAG 91* **4.9** *ADA 2010* **504** *CBC 2007* **1133B.4** *CBC 2019* **11B-504** **Mitigated:** ○ YES ◉ NO	200	IN	$270	**$54,000**

○ Staff Only

Priority 1

Severity 2

"11B-210.1 General. Interior and exterior stairs shall comply with Section 11B-504. Exceptions:

1,,,

2.In alterations, stairs between levels that are connected by an accessible route shall not be required to comply with Section 11B -504, except that striping complying with Section 11B504.4.1 and handrails complying with Section 11B-505 shall be provided when

Conceptual Costs for **Floor:** On-site **$621,636.00**

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$621,636.00**

Facility: **Riverside Park** Part: **Exterior** Floor: **On-site**

Address: **Riverside Drive, between N. D Street and Lake Street** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Riverside Park					**$621,636.00**

Access Compliance Survey Report

Riverview

North side of Riverview Drive, just west of Hwy 99

Facility #: P8

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Riverview** Part: **Exterior** Floor: **On-site**

Address: **North side of Riverview Drive, just west of Hwy 99** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 General

Accessible Route

2211

- *As-Built Description:*

No walk / sidewalk provided to connect accessible facilities or elements that are on the same site.

- *Proposed Solution:*

Provide new 48" wide walk / sidewalk or firm surface.

- ***Notes:***

PCODE **EF13**
ADAAG 91 **4.3.2**
ADA 2010 **206.1**
CBC 2007 **1114B.1.2**
CBC 2019 **11B-206.1**

Mitigated:
○ YES
◉ NO

60 LF $135 **$8,100**

○ Staff Only

Priority 1
Severity 3

The clear floor space at these elements has steep slopes and level changes.

Curb Ramp

2212

- *As-Built Description:*

No curb ramp available where an accessible route crosses a curb.

- *Proposed Solution:*

Provide new curb ramp.

PCODE **EH01**
ADAAG 91 **4.7.1**
ADA 2010 **303.4**
CBC 2007 **1127B.5.1**
CBC 2019 **11B-402.2**

Mitigated:
○ YES
◉ NO

2 JOB $7,500 **$15,000**

○ Staff Only

Priority 2
Severity 3

Facility: **Riverview** Part: **Exterior** Floor: **On-site**

Address: **North side of Riverview Drive, just west of Hwy 99** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	General Note					
2214	• *As-Built Description:* Refer to notes for observation and recommendation. • *Proposed Solution:* • ***Notes:***	*PCODE* **GN01** **Mitigated:** ○ YES ◉ NO	1	JOB		
	Only street parking is available.	○ Staff Only ***Priority*** 1 0				
	Protrusion Limits					
2213	• *As-Built Description:* Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor. • *Proposed Solution:* Trim vegetation.	*PCODE* **EG04** *ADAAG 91* **4.4.1** *ADA 2010* **307.2** *CBC 2007* **1133B.8.6.1** *CBC 2019* **11B-307.2** **Mitigated:** ○ YES ◉ NO	10	JOB	$90	**$900**
		○ Staff Only ***Priority*** 1 ***Severity*** 2				

Conceptual Costs for **Floor:** On-site **$24,000.00**

Facility: **Riverview** Part: **Exterior** Floor: **On-site**

Address: **North side of Riverview Drive, just west of Hwy 99** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$24,000.00**

Facility: **Riverview** Part: **Exterior** Floor: **On-site**

Address: **North side of Riverview Drive, just west of Hwy 99** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Riverview					**$24,000.00**

Access Compliance Survey Report

Sharon Avenue Linear Park

Sharon Avenue, between Cleveland and Riverside

Facility #: P9

City of Madera

April 2024

SSA Project #: 20029.00

SALLY SWANSON
ARCHITECTS, INC.

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

0 General

Floor or Ground Surface

2236

- *As-Built Description:*

Walk: Grating has grid openings greater than 1/2" along the line of traffic flow.

- *As-Built:* **Gaps 1.0" wide**
- *Proposed Solution:*

Fill joints

PCODE **EF04**
ADAAG 91 **4.3.6; 4.5.4**
ADA 2010 **403.2; 302.3**
CBC 2007 **1133B.7.2**
CBC 2019 **11B-403.2; 11B-302.3**

Mitigated:
○ YES
◉ NO

40 LF $60 **$2,400**

○ Staff Only

Priority 1
Severity 2

Protrusion Limits

2235

- *As-Built Description:*

Protruding objects more than 4" from wall, when bottom of object more than 27" or less than 80" above finished floor.

- *Proposed Solution:*

Trim vegetation.

PCODE **EG04**
ADAAG 91 **4.4.1**
ADA 2010 **307.2**
CBC 2007 **1133B.8.6.1**
CBC 2019 **11B-307.2**

Mitigated:
○ YES
◉ NO

20 JOB $300 **$6,000**

○ Staff Only

Priority 1
Severity 2

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

1 Cleveland to Wilson

Changes in Level

2225

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

18 LF $63 **$1,134**

○ Staff Only

Priority 1
Severity 2

Cross Slope

2221

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.0%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

1200 SF $75 **$90,000**

○ Staff Only

Priority 1
Severity 3

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

Curb Ramp

2226

- *As-Built Description:*

Transition from curb ramp to gutter does not have a smooth transition.

- *Proposed Solution:*

Grind lip.

PCODE **EH02D**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $300 **$300**

○ Staff Only

Priority 1
Severity 4

2227

- *As-Built Description:*

Maximum slope of adjoining gutters, street surface at bottom of ramp exceeds 5% (1:20).

- *As-Built:* **9.0%**
- *Proposed Solution:*

Modify road/gutter slopes. Demolish existing and provide new curb ramp.

PCODE **EH02E**
ADAAG 91 **4.7.2**
ADA 2010 **406.2**
CBC 2007 **1127B.5.3**
CBC 2019 **11B-406.5.8**

Mitigated:
○ YES
◉ NO

1 JOB $3,750 **$3,750**

○ Staff Only

Priority 1
Severity 3

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
2228	• *As-Built Description:* Less than 48" level space at top and 1:12 flared sides not provided. • *As-Built:* **46.0"** • *Proposed Solution:* Demolish existing and provide new curb ramp.	*PCODE* **EH05B** *ADAAG 91* **4.7.5; Fig.12(a)** *ADA 2010* **406.4** *CBC 2007* **1127B.5.4** *CBC 2019* **11B-406.5.3** **Mitigated:** ○ YES ◉ NO	1	JOB	$7,500	**$7,500**

○ Staff Only

Priority 1

Severity 4

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

2 Wilson to Lincoln

Changes in Level

2229

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **1.5”**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

24 LF $63 **$1,512**

○ Staff Only

Priority 1
Severity 3

Cross Slope

2222

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.4%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

1000 SF $75 **$75,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surface					
2230	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **2.0" deep pothole** • *Proposed Solution:* Repair concrete.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	1	SF	$240	**$240**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 2				
2231	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **1.5" x 1.5"** • *Proposed Solution:* Provide new grating, with grid openings 1/2" max. along the line of traffic flow.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	2	UNI	$600	**$1,200**
		 ○ Staff Only ***Priority*** 1 ***Severity*** 2				

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

3 Lincoln to South

Changes in Level

2232

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

24 LF $63 **$1,512**

○ Staff Only

Priority 1
Severity 3

Cross Slope

2223

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **3.4%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

1200 SF $75 **$90,000**

○ Staff Only

Priority 1
Severity 4

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
	Floor or Ground Surface					
2233	• *As-Built Description:* Walk: Grating has grid openings greater than 1/2" along the line of traffic flow. • *As-Built:* **1.5" x 1.5"** • *Proposed Solution:* Provide new grating, with grid openings 1/2" max. along the line of traffic flow.	*PCODE* **EF04** *ADAAG 91* **4.3.6; 4.5.4** *ADA 2010* **403.2; 302.3** *CBC 2007* **1133B.7.2** *CBC 2019* **11B-403.2; 11B-302.3** **Mitigated:** ○ YES ◉ NO	2	UNI	$900	**$1,800**

○ Staff Only

Priority 1

Severity 2

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total

4 South to Riverside

Changes in Level

2234

- *As-Built Description:*

Walk: Pavement dislocation creates abrupt change in level exceeding 1/2" in accessible route.

- *As-Built:* **2.0"**
- *Proposed Solution:*

Remove, replace or repair area of pavement sufficient to correct abrupt change in level.

PCODE **EF03**
ADAAG 91 **4.3.8**
ADA 2010 **403.4**
CBC 2007 **1133B.7.4**
CBC 2019 **11B-403.4**

Mitigated:
○ YES
◉ NO

20 LF $63 **$1,260**

○ Staff Only

Priority 1
Severity 3

Cross Slope

2224

- *As-Built Description:*

Cross slope more than 1":48" (2.083%).

- *As-Built:* **4.4%**
- *Proposed Solution:*

Modify cross slope.

PCODE **EF07**
ADAAG 91 **4.3.7**
ADA 2010 **403.3**
CBC 2007 **1133B.7.1.3**
CBC 2019 **11B-403.3**

Mitigated:
○ YES
◉ NO

700 SF $75 **$52,500**

○ Staff Only

Priority 1
Severity 3

Conceptual Costs for **Floor:** On-site **$336,108.00**

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Area:** Exterior					**$336,108.00**

Facility: **Sharon Avenue Linear Park** Part: **Exterior** Floor: **On-site**

Address: **Sharon Avenue, between Cleveland and Riverside Drive** Year Built:

Item no., Rm no. and Name	Existing Architectural Barrier and Proposed Solution	Codes / Mitigation Info	Qty	Unit	Cost	Total
Conceptual Costs for	**Facility:** Sharon Avenue Linear Park					**$336,108.00**
Conceptual Costs for	City of Madera					**$14,599,254.00**

APPENDIX C: ACCESS COMPLIANCE SURVEY REPORT OF SIDEWALKS

City of Madera

Appendix C: Sidewalks

Access Compliance Survey Report

November 2023
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

TABLE OF CONTENTS

I. Access Compliance Survey Report
    i. Report Navigation and Legend Abbreviations

II. Master Street List

III. Cost Summary

IV. Survey Data for Sidewalks

NAVIGATION & LEGEND

SSA Project # 20029
November 2023

SALLY SWANSON
ARCHITECTS, INC.

NAVIGATION

City of Madera — Access Compliance Survey Report - Sidewalks — **10Th St**

Funding Source: TBD — **Year to be Completed** TBD — (13)

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name				Priority
(1) NW	2106100939	(3) 10TH ST	(5) S B ST	(9) S C ST	(10)	(11)		70

ID	(2) Dist. from Corner	(4) Barrier Type	(6) As-is Measurement/Notes	(7) Sidewalk Width	(8) Qty	Unit	Cost	(12) Total
49489	8.0 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
49490	37.8 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49485	39.7 to 40.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
49491	42.0 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
49492	46.1 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
49493	50.7 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
49494	54.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
49486	72.5 to 73.5 feet	Vertical Change	-.3"	5 ft	5	REF		
49495	79.7 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
49496	89.5 to 93.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**

1. Street Side: Corresponds to the side of the street surveyed: - N, S, E and W.
2. Dist. from Corner: The location of the identified barrie , measured in feet from the intersection/starting street.
3. Survey Street: Name of arterial/primary Street for which barriers are being surveyed.
4. Barrier Type: Type of Barrier recorded.
5. Starting Street: Name of the intersecting starting street from which barrier locations are being measured.
6. Measurement: Existing condition/dimension.
7. Sidewalk Width: Width of the sidewalk measured in feet.
8. Qty: Number of solutions required.
9. End Street: Name of the intersecting ending street from which barrier locations are being measured.
10. Unit: Unit of measurement used to compute estimate. LF=linear feet; SF=square feet; JOB=lump sum; REF=reference
11. Cost Estimated cost of specific solution per one unit (The final cost of barrier removal may exceed thi estimate based on the year of mitigation, design approach, and chosen method of mitigation.
12. Total: Total estimated cost for removing identified barrier (multiplied Qty by Cost)
13. Priority: Priority number assigned to specific barrier based on priorization criteria which include: expected frequency of use and severity of the barrier. Measureed on a scale of 0 to 200, with 200 being the highest priority and 0 being the least.

LEGEND ABBREVIATIONS

ADA	Americans with Disabilities Act
ADAAG	ADA Accessibility Guidelines
E	East
Fig.	Figure
JOB	per one job (lump sum)
lbs.	Pounds
LF	Linear foot
MUTCD	Manual on Uniform Traffic Control Devic
N	North
NE	Northeast
NW	Northwest
POT	Path of travel
PROW	Public Right-of-Way
PROWAG	Public Right-of-Way Accesible Guidelines
Qty	Quantity
REF	Reference; Provided in locations with overlapping issue; indicates no addition cost required for mitigation
S	South
SE	Southeast
SF	Square foot
SW	Southwest
TBD	To be determined
W	West

MASTER STREET LIST

SSA Project # 20029

November 2023

SALLY SWANSON ARCHITECTS, INC.

	Total Cost for Street:
Street: **10TH ST**	**$509,985.00**
Street: **11TH ST**	**$921,705.00**
Street: **12TH ST**	**$768,245.00**
Street: **13TH ST**	**$433,450.00**
Street: **14TH ST**	**$309,834.00**
Street: **1ST ST**	**$61,642.50**
Street: **2ND ST**	**$152,505.00**
Street: **3RD ST**	**$485,947.50**
Street: **4TH ST**	**$827,705.00**
Street: **5TH ST**	**$1,872,792.50**
Street: **6TH ST**	**$2,819,462.50**
Street: **7TH ST**	**$765,171.00**
Street: **8TH ST**	**$374,802.00**
Street: **9TH ST**	**$424,470.00**
Street: **A ST**	**$1,026,713.00**
Street: **ACCORNERO AVE**	**$117,825.00**
Street: **ACORN CT**	**$130,410.00**
Street: **ADAMS AVE**	**$141,294.00**
Street: **ADANAC CT**	**$44,820.00**
Street: **ADANAC WAY**	**$740,206.00**
Street: **ADELAIDE AVE**	**$1,056,210.00**
Street: **ADELL ST**	**$527,692.00**
Street: **AIRPORT DR**	**$1,221,395.00**
Street: **ALDERWOOD CT**	**$108,240.00**
Street: **ALEXIS WAY**	**$137,842.50**
Street: **ALICANTE WAY**	**$464,837.50**
Street: **ALMOND AVE**	**$3,073,149.88**
Street: **AMY AVE**	**$163,808.00**
Street: **ANGEL FALLS CT**	**$47,955.00**
Street: **ANNA AVE**	**$125,460.00**
Street: **APPLE CT**	**$112,716.00**
Street: **APPLE ST**	**$87,318.00**
Street: **APPLE TREE CT**	**$39,955.00**
Street: **APPLE TREE DR**	**$184,095.00**
Street: **ARAM AVE**	**$119,950.50**
Street: **ARBELLA LN**	**$455,565.00**
Street: **ARDILLA DR**	**$719,840.00**
Street: **ARIES CT**	**$111,615.00**
Street: **ARTHUR CT**	**$128,367.50**
Street: **ASHBURY CT**	**$229,845.00**
Street: **ASHLAN WAY**	**$1,248,197.00**
Street: **ASILOMAR DR**	**$497,355.00**
Street: **ASPEN LN**	**$555,354.00**
Street: **ASTI WAY**	**$206,094.00**
Street: **AUSTIN AVE**	**$1,018,605.00**
Street: **AVALON AVE**	**$263,395.00**
Street: **AVE 13**	**$174,450.00**
Street: **AVE 14**	**$100,035.00**
Street: **AVE 17**	**$307,515.00**
Street: **AVENUE 17**	**$6,120.00**
Street: **AVIATION DR**	**$81,120.00**
Street: **AVILA WAY**	**$190,218.00**
Street: **AWAHNEE CT**	**$82,080.00**
Street: **AZURE DR**	**$349,370.00**
Street: **BALSAM CT**	**$137,445.00**
Street: **BARBERA AVE**	**$152,630.00**
Street: **BARCELONA WAY**	**$380,367.00**
Street: **BARNETT WAY**	**$573,820.00**
Street: **BARON ST**	**$249,412.50**

	Total Cost for Street:
Street: **BAY CT**	**$155,170.00**
Street: **BAY VIEW DR**	**$180,195.00**
Street: **BAYLOR CT**	**$56,940.00**
Street: **BEECHWOOD WAY**	**$820,659.00**
Street: **BENT OAK TR**	**$84,055.00**
Street: **BERNARDI AVE**	**$244,110.00**
Street: **BERRY DR**	**$429,275.00**
Street: **BERRY DRIVE**	**$90,165.00**
Street: **BILBAO CT**	**$208,845.00**
Street: **BLOKER ST**	**$13,035.00**
Street: **BLUEBERRY LN**	**$82,966.50**
Street: **BLUERIDGE DR**	**$243,475.00**
Street: **BO TREE LN**	**$263,695.00**
Street: **BOLINAS WAY**	**$29,760.00**
Street: **BOULDER AVE**	**$447,930.00**
Street: **BOULDER PL**	**$16,605.00**
Street: **BRIDGE WAY**	**$308,050.00**
Street: **BRIQUEL AVE**	**$170,115.00**
Street: **BUENA VENTURA CT**	**$84,815.00**
Street: **CAITLAN DR**	**$461,205.00**
Street: **CAITLAN DRIVE**	**$163,545.00**
Street: **CAMBRIA AVE**	**$407,655.00**
Street: **CANAL ST**	**$482,440.00**
Street: **CAPISTRANO DR**	**$274,345.00**
Street: **CARMEL ST**	**$127,090.00**
Street: **CARMEN AVE**	**$361,308.00**
Street: **CARRY AVE**	**$123,980.00**
Street: **CASHEW CT**	**$132,525.00**
Street: **CEDAR CREEK LN**	**$287,475.00**
Street: **CENTRAL AVE**	**$610,300.00**
Street: **CENTRAL CT**	**$22,284.00**
Street: **CENTRAL PL**	**$231,717.00**
Street: **CHABLIS AVE**	**$118,375.00**
Street: **CHAPIN ST**	**$677,295.00**
Street: **CHATOM WY**	**$82,935.00**
Street: **CHERRY ST**	**$141,799.50**
Street: **CHERRY TREE DR**	**$373,205.00**
Street: **CHESTNUT AVE**	**$568,104.00**
Street: **CHIANTI AVE**	**$717,007.50**
Street: **CHIANTI CT**	**$73,575.00**
Street: **CITRUS WAY**	**$71,985.00**
Street: **CLAREMONT DR**	**$57,005.00**
Street: **CLINTON ST**	**$2,110,702.00**
Street: **CLOUD REST CT**	**$75,295.00**
Street: **COCONUT ST**	**$32,616.00**
Street: **COLIMA AVE**	**$49,565.00**
Street: **COLOMBARD DR**	**$683,215.50**
Street: **COLUMBIA ST**	**$60,219.00**
Street: **COMMON WAY**	**$159,025.00**
Street: **CONCORD AVE**	**$711,001.50**
Street: **CONCORD CT**	**$119,695.00**
Street: **CONDOR DR**	**$96,684.00**
Street: **COOLIDGE ST**	**$535,605.00**
Street: **CORONA DR**	**$303,690.00**
Street: **COSENTINO DR**	**$484,485.00**
Street: **COUNTRY CLUB DR**	**$2,034,811.00**
Street: **CREEK DR**	**$228,115.00**
Street: **CRIMSON WY**	**$72,420.00**
Street: **CROSS ST**	**$197,269.00**

	Total Cost for Street:
Street: **CROWN TERRACE**	**$53,400.00**
Street: **CRYSTAL WAY**	**$336,951.00**
Street: **CYPRESS CT**	**$113,765.00**
Street: **CYPRESS ST**	**$410,704.00**
Street: **DAVIS ST**	**$463,968.00**
Street: **DE ANN COVE**	**$91,275.00**
Street: **DEBORAH LN**	**$693,545.00**
Street: **DEERWOOD CT**	**$99,210.00**
Street: **DEERWOOD DR**	**$200,555.00**
Street: **DEL LAGO WAY**	**$8,490.00**
Street: **DELLAVALLE AVE**	**$182,520.00**
Street: **DESERT RANCH WAY**	**$657,125.00**
Street: **DIAMANTE LN**	**$44,135.00**
Street: **DIAMOND WAY**	**$438,568.00**
Street: **DIANE WAY**	**$249,350.00**
Street: **DOME AVE**	**$273,780.00**
Street: **DOMINGUEZ DR**	**$356,415.00**
Street: **DON MIGUEL ST**	**$80,830.00**
Street: **DOUBLE TREE CT**	**$53,080.00**
Street: **DOUBLE TREE WAY**	**$1,686,797.50**
Street: **DRAKE ST**	**$126,535.00**
Street: **DRIFTWOOD DR**	**$959,065.00**
Street: **DRYSDALE WAY**	**$393,715.00**
Street: **DUTRA CT**	**$216,645.00**
Street: **DUTRA WAY**	**$614,440.00**
Street: **DWYER AVE**	**$297,620.00**
Street: **E ADELL ST**	**$406,602.50**
Street: **E ALMOND AVE**	**$346,285.00**
Street: **E CENTRAL AVE**	**$121,239.00**
Street: **E CLARK ST**	**$538,504.00**
Street: **E CLEVELAND AVE**	**$5,642,529.75**
Street: **E ELLIS ST**	**$1,411,821.50**
Street: **E KENNEDY ST**	**$1,441,834.00**
Street: **E LINCOLN AVE**	**$2,405,313.00**
Street: **E RIVERSIDE DR**	**$2,455,937.00**
Street: **E RUSH ST**	**$80,358.00**
Street: **E SHERWOOD WAY**	**$676,730.00**
Street: **EAGLE DR**	**$178,415.00**
Street: **EAGLE WAY**	**$163,275.00**
Street: **EASY CT**	**$31,460.00**
Street: **EIGHTH ST**	**$224,005.00**
Street: **EISENHOWER LN**	**$403,200.00**
Street: **EL MONTE AVE**	**$115,089.00**
Street: **EL MONTE CT**	**$127,944.00**
Street: **EL MONTE ST**	**$216,100.00**
Street: **ELLIS ST**	**$1,625,455.00**
Street: **ELM AVE**	**$950,067.00**
Street: **EMERALD WY**	**$63,720.00**
Street: **EMILY WAY**	**$676,975.00**
Street: **EXPRESS CT**	**$74,625.00**
Street: **FAIR OAK AVE**	**$136,675.00**
Street: **FAIRFIELD WAY**	**$820,310.00**
Street: **FAIRMONT CT**	**$70,722.50**
Street: **FAIRVIEW AVE**	**$158,724.00**
Street: **FAIRWAY AVE**	**$919,572.00**
Street: **FICKLIN DR**	**$236,725.00**
Street: **FIESTA DR**	**$68,445.00**
Street: **FIFTH ST**	**$390,344.50**
Street: **FIG AVE**	**$327,418.00**

	Total Cost for Street:
Street: **FILBERT ST**	**$41,810.00**
Street: **FILLMORE AVE**	**$451,755.00**
Street: **FISK CT**	**$56,885.00**
Street: **FLUME ST**	**$376,675.00**
Street: **FOREST CT**	**$102,680.00**
Street: **FOREST LN**	**$197,460.00**
Street: **FORUM WAY**	**$166,930.00**
Street: **FOUNTAIN WAY**	**$307,201.00**
Street: **FOURTH ST**	**$1,208,997.00**
Street: **FOXGLOVE WAY**	**$733,447.00**
Street: **FREDERICK CT**	**$151,410.00**
Street: **FREDERICK WAY**	**$407,790.00**
Street: **FRESHET DR**	**$73,647.50**
Street: **FRESNO ST**	**$60,495.00**
Street: **FRITZ ST**	**$111,495.00**
Street: **GABRIEL WAY**	**$95,915.00**
Street: **GAMAY AVE**	**$911,250.00**
Street: **GAMAY ST**	**$452,715.00**
Street: **GARFIELD AVE**	**$21,200.00**
Street: **GARY LN**	**$2,222,927.00**
Street: **GATEWAY DR**	**$1,894,217.00**
Street: **GEORGIA AVE**	**$342,288.00**
Street: **GEORGIA CT**	**$64,115.00**
Street: **GILL AVE**	**$247,030.00**
Street: **GLADE AVE**	**$1,080,045.00**
Street: **GLENVILLE AVE**	**$861,460.00**
Street: **GOLDEN STATE BLVD**	**$46,995.00**
Street: **GOOSECROSS DR**	**$503,670.00**
Street: **GRANADA DR**	**$1,884,105.00**
Street: **GRANT AVE**	**$19,980.00**
Street: **GRAPE ST**	**$61,933.50**
Street: **GRAPEFRUIT WAY**	**$186,224.00**
Street: **GRAPEWOOD WAY**	**$461,999.00**
Street: **GREEN WAY**	**$889,641.00**
Street: **GREENWOOD DR**	**$458,965.00**
Street: **GRENACHE AVE**	**$275,340.00**
Street: **HACIENDA ST**	**$323,617.50**
Street: **HALF DOME CT**	**$91,680.00**
Street: **HAMPTON DR**	**$282,938.00**
Street: **HARBOR CT**	**$123,645.00**
Street: **HARBOR DR**	**$262,885.00**
Street: **HARDING AVE**	**$7,000.00**
Street: **HARRISON CT**	**$144,755.00**
Street: **HARVARD AVE**	**$315,465.00**
Street: **HAYES CT**	**$92,460.00**
Street: **HAZEL AVE**	**$300,240.00**
Street: **HAZELNUT DR**	**$261,760.00**
Street: **HAZELNUT LN**	**$191,330.00**
Street: **HELENA WAY**	**$221,995.00**
Street: **HICKORY AVE**	**$243,495.00**
Street: **HIGH ST**	**$351,480.00**
Street: **HILLCREST CT**	**$232,720.00**
Street: **HILLSBORO AVE**	**$792,234.00**
Street: **HOLIDAY CT**	**$77,925.00**
Street: **HOLLOW AVE**	**$276,540.00**
Street: **HOOVER AVE**	**$409,245.00**
Street: **HOWARD RD**	**$1,507,029.50**
Street: **HULL AVE**	**$947,355.00**
Street: **IMPERIAL DR**	**$296,500.00**

	Total Cost for Street:
Street: **INDEPENDENCE DRIVE**	**$650,955.00**
Street: **INDIGO DR**	**$205,235.00**
Street: **INDUSTRIAL AVE**	**$264,171.00**
Street: **IRONWOOD WAY**	**$276,642.50**
Street: **ISLA VISTA CT**	**$225,945.00**
Street: **IVORY CT**	**$197,895.00**
Street: **IVY GLEN DR**	**$321,300.00**
Street: **JACKSON CT**	**$117,145.00**
Street: **JADEN CT**	**$116,100.00**
Street: **JAMES WAY**	**$462,863.00**
Street: **JEFFERSON AVE**	**$799,290.00**
Street: **JENNINGS ST**	**$5,115.00**
Street: **JERICHO DR**	**$760,569.00**
Street: **JESSE DR**	**$314,166.00**
Street: **JONATHAN WAY**	**$367,520.00**
Street: **JOSEPH LN**	**$193,076.00**
Street: **JOSEPHINE CT**	**$474,983.00**
Street: **JOY ST**	**$4,224.00**
Street: **JOYA DR**	**$277,720.00**
Street: **JUDITH CT**	**$161,385.00**
Street: **JUDITH WAY**	**$468,255.00**
Street: **KATHRYN AVE**	**$324,330.00**
Street: **KELSEY LN**	**$223,895.00**
Street: **KENNEDY ST**	**$800,659.00**
Street: **KENNEY CT**	**$101,862.00**
Street: **KENT DR**	**$730,490.00**
Street: **KENT WAY**	**$260,715.00**
Street: **KENTON WAY**	**$130,884.00**
Street: **KERN ST**	**$83,424.00**
Street: **KIMBERLEY LN**	**$347,874.00**
Street: **KIMBERLY DR**	**$472,150.00**
Street: **KIMMEL AVE**	**$310,902.50**
Street: **KIWI ST**	**$230,184.00**
Street: **KNOX AVE**	**$549,551.50**
Street: **KNOX CT**	**$115,920.00**
Street: **KNOX RD**	**$1,065,455.00**
Street: **KNOX ST**	**$2,063,590.00**
Street: **KOUFAX DR**	**$143,460.00**
Street: **LA COSTA CT**	**$49,680.00**
Street: **LA JOLLA CT**	**$193,025.00**
Street: **LA JOLLA WY**	**$548,050.00**
Street: **LA PERLA LN**	**$145,760.00**
Street: **LA QUINTA WAY**	**$388,044.50**
Street: **LACRETA AVE**	**$928,532.00**
Street: **LAGUNA WAY**	**$833,135.50**
Street: **LARRETE AVE**	**$330,485.00**
Street: **LAS CASAS LN**	**$182,060.00**
Street: **LAS FRESAS WAY**	**$274,000.00**
Street: **LAUREL ST**	**$131,505.00**
Street: **LEMON AVE**	**$893,307.00**
Street: **LEMON TREE DR**	**$291,560.00**
Street: **LEWIS ST**	**$65,662.00**
Street: **LIBERTY LN**	**$586,590.00**
Street: **LIGHTHOUSE CT**	**$78,290.00**
Street: **LIGHTHOUSE DR**	**$329,485.00**
Street: **LILLY ST**	**$2,448,592.00**
Street: **LIME AVE**	**$333,063.00**
Street: **LINDA MESA DR**	**$384,285.00**
Street: **LINDEN ST**	**$20,280.00**

	Total Cost for Street:
Street: **LOMA LINDA LN**	**$304,380.00**
Street: **LOS ARCOS LN**	**$341,454.00**
Street: **LOS CERRITOS WAY**	**$131,295.00**
Street: **LOS OSOS CT**	**$89,735.00**
Street: **LOVE CT**	**$43,505.00**
Street: **LUCCA COURT**	**$54,375.00**
Street: **LUCIA WAY**	**$476,131.00**
Street: **LYNMARIE WAY**	**$159,615.00**
Street: **LYNN WAY**	**$263,147.00**
Street: **LYONS ST**	**$89,010.00**
Street: **MACADAMIA AVE**	**$885,698.00**
Street: **MACE ST**	**$135,316.50**
Street: **MADARIN ST**	**$209,169.00**
Street: **MADISON DR**	**$661,622.00**
Street: **MADRID LN**	**$499,961.00**
Street: **MAGNOLIA ST**	**$90,360.00**
Street: **MAINBERRY DR**	**$1,245,282.50**
Street: **MAJESTIC CT**	**$148,475.25**
Street: **MAJESTIC WAY**	**$121,275.00**
Street: **MAKENNA DR**	**$349,830.00**
Street: **MALONE ST**	**$108,409.50**
Street: **MANDANA WAY**	**$123,615.00**
Street: **MANGO AVE**	**$356,764.00**
Street: **MANRESA DR**	**$154,735.00**
Street: **MANZANA CT**	**$284,755.00**
Street: **MAPLE ST**	**$735,660.00**
Street: **MAPLE STREET**	**$127,965.00**
Street: **MARIE DR**	**$427,752.50**
Street: **MARINA DR**	**$108,365.00**
Street: **MARIPOSA ST**	**$347,080.00**
Street: **MATEO WAY**	**$195,855.00**
Street: **MEADOWREST WAY**	**$366,450.00**
Street: **MERCED ST**	**$1,045,906.00**
Street: **MERLOT AVE**	**$1,329,830.00**
Street: **MICHOACAN CT**	**$530,176.50**
Street: **MILANO LANE**	**$466,365.00**
Street: **MILLVIEW DR**	**$149,524.00**
Street: **MILOW ST**	**$125,940.00**
Street: **MIRA LOMA WAY**	**$33,015.00**
Street: **MITCHELL CT**	**$7,635.00**
Street: **MODOC ST**	**$354,535.00**
Street: **MONARCH RD**	**$260,440.00**
Street: **MONOCOTT DR**	**$902,092.50**
Street: **MONROE AVE**	**$519,185.00**
Street: **MONTEREY DR**	**$747,160.00**
Street: **MONTEREY ST**	**$967,759.00**
Street: **MOORE AVE**	**$126,070.00**
Street: **MUNRAS AVE**	**$455,815.00**
Street: **N A ST**	**$809,002.00**
Street: **N B ST**	**$667,210.00**
Street: **N C ST**	**$687,118.00**
Street: **N D ST**	**$2,722,815.00**
Street: **N E ST**	**$627,378.00**
Street: **N G ST**	**$1,060,425.00**
Street: **N GATEWAY DR**	**$1,679,442.50**
Street: **N GRANADA DR**	**$3,825,605.00**
Street: **N H ST**	**$470,286.00**
Street: **N I ST**	**$1,335,940.00**
Street: **N J ST**	**$621,258.00**

	Total Cost for Street:
Street: **N K ST**	**$948,610.00**
Street: **N L ST**	**$1,654,148.50**
Street: **N LAKE ST**	**$3,221,537.50**
Street: **N M ST**	**$446,365.00**
Street: **N N ST**	**$1,034,630.50**
Street: **N O ST**	**$439,710.00**
Street: **N P ST**	**$147,915.00**
Street: **N PARK DR**	**$29,535.00**
Street: **N Q ST**	**$93,330.00**
Street: **N SCHNOOR AVE**	**$3,602,210.00**
Street: **N WESTBERRY BLV**	**$485,325.00**
Street: **N WESTBERRY BLVD**	**$50,580.00**
Street: **NAPOLI ST**	**$141,255.00**
Street: **NATIONAL AVE**	**$796,745.00**
Street: **NAVEL AVE**	**$294,159.00**
Street: **NEBRASKA AVE**	**$32,438.00**
Street: **NEBRASKA ST**	**$137,389.00**
Street: **NECTARINE ST**	**$210,132.00**
Street: **NEPLUS WY**	**$38,475.00**
Street: **NICOLA WAY**	**$131,118.00**
Street: **NINTH ST**	**$429,305.00**
Street: **NOBLE ST**	**$283,509.00**
Street: **NOREEN WAY**	**$621,374.00**
Street: **OAK ST**	**$750,299.00**
Street: **OAKRIDGE DR**	**$166,280.00**
Street: **OLIVE AVE**	**$5,230,555.50**
Street: **ORANGE TREE CT**	**$55,460.00**
Street: **ORANGE TREE DR**	**$52,830.00**
Street: **ORCHARD AVE**	**$634,002.50**
Street: **ORCHARD HILL DR**	**$329,845.00**
Street: **ORTEGA DR**	**$43,455.00**
Street: **OSO DR**	**$528,050.00**
Street: **OWENS ST**	**$785,752.00**
Street: **PACIFIC CT**	**$179,805.00**
Street: **PADRE ST**	**$105,660.00**
Street: **PAINTBRUSH DR**	**$525,850.00**
Street: **PAMELA DR**	**$643,345.00**
Street: **PAPAYA ST**	**$274,527.00**
Street: **PARK ST**	**$14,340.00**
Street: **PARKWOOD AVE**	**$421,485.00**
Street: **PASEO DEL MAR PRKW**	**$441,625.00**
Street: **PAUL AVE**	**$30,495.00**
Street: **PEACH CT**	**$162,139.50**
Street: **PEACH ST**	**$201,024.00**
Street: **PEACH TREE DR**	**$302,355.00**
Street: **PEANUT CT**	**$51,775.00**
Street: **PEANUT DR**	**$109,955.00**
Street: **PEAR CT**	**$18,288.00**
Street: **PEAR ST**	**$497,047.50**
Street: **PEAR TREE DR**	**$283,175.00**
Street: **PECAN AVE**	**$2,063,679.50**
Street: **PEERLESS ST**	**$119,605.00**
Street: **PENNY WAY**	**$276,615.00**
Street: **PERCY ST**	**$133,779.00**
Street: **PERKINS AVE**	**$263,109.00**
Street: **PERKINS RD**	**$29,600.00**
Street: **PERSIMMON ST**	**$140,121.00**
Street: **PETITE AVE**	**$175,595.00**
Street: **PETITE CT**	**$56,130.00**

	Total Cost for Street:
Street: **PHILIP ST**	**$361,568.00**
Street: **PIERCE LN**	**$415,165.00**
Street: **PINE ST**	**$1,345,060.00**
Street: **PINEWOOD CT**	**$52,300.00**
Street: **PINEWOOD DR**	**$725,082.50**
Street: **PLUMAS ST**	**$851,385.00**
Street: **PLUMAS STREET**	**$175,025.00**
Street: **PLUMWOOD WAY**	**$327,134.00**
Street: **PODRES LN**	**$131,700.00**
Street: **POINT SUR DR**	**$174,180.00**
Street: **POLK AVE**	**$83,760.00**
Street: **POMEGRANATE ST**	**$152,257.50**
Street: **POMPEI ST**	**$74,035.00**
Street: **POPOLI WAY**	**$111,393.00**
Street: **PRINCETON AVE**	**$437,695.00**
Street: **PRIVATE**	**$26,340.00**
Street: **QUADY LN**	**$365,000.00**
Street: **R ST**	**$113,039.00**
Street: **RANCHO MIRAGE RD**	**$532,359.00**
Street: **RANCHO SANTA FE DR**	**$256,795.00**
Street: **RD 28**	**$1,105,409.00**
Street: **REN WAY**	**$810,285.00**
Street: **RENEE WAY**	**$124,123.00**
Street: **RHINE CT**	**$82,920.00**
Street: **RIVER POINTE**	**$55,515.00**
Street: **RIVERSIDE CT**	**$14,415.00**
Street: **RIVERSIDE DR**	**$1,005,524.00**
Street: **RIVERVIEW DR**	**$2,446,795.00**
Street: **RIVERWALK DR**	**$921,663.50**
Street: **ROBINWOOD WAY**	**$200,847.00**
Street: **ROGERS ST**	**$151,280.00**
Street: **ROMA COURT**	**$181,365.00**
Street: **ROOSEVELT AVE**	**$1,539,241.50**
Street: **ROSE ST**	**$45,395.00**
Street: **ROTAN AVE**	**$302,163.00**
Street: **ROYAL DR**	**$377,520.00**
Street: **RUBICON AVE**	**$62,635.00**
Street: **RUNNING BROOK DR**	**$184,440.00**
Street: **RUSH ST**	**$23,695.00**
Street: **S A ST**	**$1,734,975.00**
Street: **S B ST**	**$1,449,462.50**
Street: **S C ST**	**$2,275,061.50**
Street: **S D ST**	**$1,692,467.50**
Street: **S DOUBLE TREE WAY**	**$540,540.00**
Street: **S E ST**	**$776,423.25**
Street: **S G ST**	**$853,409.00**
Street: **S GATEWAY DR**	**$1,414,060.00**
Street: **S H ST**	**$246,202.00**
Street: **S I ST**	**$1,568,883.00**
Street: **S LAKE ST**	**$1,535,816.50**
Street: **S O ST**	**$44,355.00**
Street: **S PINE ST**	**$31,080.00**
Street: **S Q ST**	**$64,620.00**
Street: **S TIMBERLINE DR**	**$391,395.00**
Street: **S WOLFTRAP ST**	**$669,780.00**
Street: **SAINT MARY AVE**	**$96,915.00**
Street: **SALVADOR WY**	**$135,570.00**
Street: **SAN ANDREA AVE**	**$232,730.00**
Street: **SAN ANGELO AVE**	**$209,890.00**

	Total Cost for Street:
Street: **SAN BRUNO AVE**	**$674,312.50**
Street: **SAN CARLOS AVE**	**$241,970.00**
Street: **SAN DIEGO AVE**	**$428,509.00**
Street: **SAN GABRIEL DR**	**$343,656.00**
Street: **SAN JOSE AVE**	**$195,810.00**
Street: **SAN JUAN DR**	**$151,415.00**
Street: **SAN MARCO AVE**	**$173,250.00**
Street: **SAN PIETRO DR**	**$197,542.50**
Street: **SAN RAMON AVE**	**$77,989.00**
Street: **SAN SEBASTIAN WAY**	**$481,918.50**
Street: **SANARITA CT**	**$122,869.00**
Street: **SANARITA WY**	**$500,539.00**
Street: **SAND DOLLAR CT**	**$185,175.00**
Street: **SANDALWOOD DR**	**$380,340.00**
Street: **SANTA BONITA ST**	**$757,241.00**
Street: **SANTA CLARA ST**	**$142,080.00**
Street: **SANTA CRUZ ST**	**$301,374.00**
Street: **SANTA FE CT**	**$111,749.00**
Street: **SANTA FE ST**	**$75,174.00**
Street: **SANTA LUCIA DR**	**$520,920.00**
Street: **SAUNDERS AVE**	**$255,435.00**
Street: **SAUNDERS RD**	**$24,000.00**
Street: **SAURET ST**	**$139,345.00**
Street: **SAWMILL ST**	**$155,482.50**
Street: **SCARLET DR**	**$167,190.00**
Street: **SCHNOOR AVE**	**$606,684.00**
Street: **SEAHORSE CT**	**$127,860.00**
Street: **SEASIDE DR**	**$140,500.00**
Street: **SEGOVIA CT**	**$776,705.00**
Street: **SENECA AVE**	**$258,855.00**
Street: **SENECA DR**	**$391,034.00**
Street: **SEPIA CT**	**$197,190.00**
Street: **SEVENTH ST**	**$150,826.00**
Street: **SEVILLA ST**	**$151,635.00**
Street: **SHANNON AVE**	**$1,006,931.00**
Street: **SHARON BVD**	**$3,078,621.00**
Street: **SHELLEY COVE**	**$123,615.00**
Street: **SHORESIDE DR**	**$169,680.00**
Street: **SIERRA ST**	**$74,137.00**
Street: **SIXTH ST**	**$441,573.00**
Street: **SOLANO ST**	**$294,055.00**
Street: **SONORA ST**	**$1,033,252.00**
Street: **SOQUEL CT**	**$67,310.00**
Street: **ST JULIEN DR**	**$337,375.00**
Street: **ST MONTELENA CT**	**$232,890.00**
Street: **ST TROPEZ DR**	**$283,265.00**
Street: **ST. MICHELLE DR**	**$467,335.00**
Street: **ST. MONTELENA DR**	**$532,285.00**
Street: **STADIUM RD**	**$3,604,137.00**
Street: **STANFORD AVE**	**$330,470.00**
Street: **STARFISH CT**	**$127,115.00**
Street: **STATE ST**	**$236,095.00**
Street: **STEEPLE GATE**	**$72,435.00**
Street: **STEPHANIE LN**	**$680,475.00**
Street: **STEVEN COURT**	**$53,397.50**
Street: **STEVEN LANE**	**$467,050.00**
Street: **STINSON AVE**	**$584,755.00**
Street: **STOREY RD**	**$266,325.00**
Street: **STRAUSS CT**	**$263,079.00**

	Total Cost for Street:
Street: **STRAUSS LN**	**$56,983.50**
Street: **SUBURBAN AVE**	**$511,295.00**
Street: **SULTANA DR**	**$338,702.50**
Street: **SUMMER LN**	**$540,065.00**
Street: **SUMMER SET LN**	**$371,125.00**
Street: **SUNDANCE LN**	**$474,230.00**
Street: **SUNNYDALE ST**	**$363,520.00**
Street: **SUNRISE AVE**	**$2,191,583.50**
Street: **SUNSET AVE**	**$5,831,404.50**
Street: **SUSAN LN**	**$200,625.00**
Street: **SYCAMORE AVE**	**$200,367.50**
Street: **TAFT DR**	**$72,315.00**
Street: **TALISE AVE**	**$66,435.00**
Street: **TANGERINE AVE**	**$863,459.00**
Street: **TAYLOR LANE**	**$391,510.00**
Street: **TAYLOR ST**	**$192,160.00**
Street: **TERRACE PL**	**$32,590.00**
Street: **TEVIN WAY**	**$148,695.00**
Street: **THIRD ST**	**$522,900.00**
Street: **TIBURON WAY**	**$365,647.50**
Street: **TIMBERLINE DR**	**$577,937.50**
Street: **TODD ST**	**$195,335.00**
Street: **TOLEDO WAY**	**$185,402.50**
Street: **TOLUCA**	**$226,437.50**
Street: **TOLUCA WAY**	**$226,895.00**
Street: **TORONADO DR**	**$251,100.00**
Street: **TORRES WAY**	**$40,329.00**
Street: **TOSCHI DR**	**$432,315.00**
Street: **TOSCHI DRIVE**	**$99,365.00**
Street: **TOZER ST**	**$1,896,451.00**
Street: **TRABON WAY**	**$322,690.00**
Street: **TRAGON ST**	**$309,455.00**
Street: **TRAIL WAY**	**$64,020.00**
Street: **TREVOR CT**	**$156,180.00**
Street: **TREVOR WAY**	**$663,765.00**
Street: **TRIVISO AVE**	**$207,615.00**
Street: **TRUMAN DR**	**$498,919.00**
Street: **TULARE ST**	**$1,017,626.00**
Street: **TYLER LN**	**$330,860.00**
Street: **UMBER DR**	**$446,910.00**
Street: **UNIVERSITY AVE**	**$938,152.50**
Street: **VALENCIA AVE**	**$1,254,733.50**
Street: **VALLEY WAY**	**$640,350.00**
Street: **VARBELLA PK**	**$579,595.00**
Street: **VARBELLA WAY**	**$75,420.00**
Street: **VENTURI AVE**	**$98,340.00**
Street: **VENTURI CT**	**$102,780.00**
Street: **VERDE MESA WAY**	**$323,737.50**
Street: **VIA CAPITOLA**	**$179,640.00**
Street: **VIA CERIONI**	**$368,586.00**
Street: **VIA DE ORO**	**$210,070.00**
Street: **VIA SANTA BARBARA**	**$164,465.00**
Street: **VICTORY LANE**	**$230,040.00**
Street: **VINEYARD AVE**	**$422,011.00**
Street: **W 1ST ST**	**$114,555.00**
Street: **W 2ND ST**	**$30,420.00**
Street: **W 4TH ST**	**$210,384.00**
Street: **W CENTRAL AVE**	**$532,797.00**
Street: **W CLARK ST**	**$528,506.00**

	Total Cost for Street:
Street: **W CLEVELAND AVE**	**$4,816,242.50**
Street: **W KENNEDY ST**	**$2,340.00**
Street: **W PARK DR**	**$713,100.00**
Street: **W ROBERTS AVE**	**$237,200.00**
Street: **W SHERWOOD WAY**	**$2,632,189.00**
Street: **W SOUTH ST**	**$1,287,765.00**
Street: **W YOSEMITE AVE**	**$2,003,053.00**
Street: **WALLACE AVE**	**$803,735.00**
Street: **WALNUT ST**	**$65,280.00**
Street: **WASHINGTON CT**	**$110,810.50**
Street: **WASHINGTON ST**	**$299,281.50**
Street: **WATT ST**	**$168,390.00**
Street: **WAWONA CT**	**$78,915.00**
Street: **WESSMITH WAY**	**$784,357.50**
Street: **WESTBERRY BLVD**	**$24,750.00**
Street: **WESTBERRY BVD**	**$3,333,024.00**
Street: **WESTGATE DR**	**$444,837.50**
Street: **WILLIAMS AVE**	**$628,909.00**
Street: **WILLIS AVE**	**$70,380.00**
Street: **WILLOW CT**	**$93,960.00**
Street: **WILSON AVE**	**$299,006.00**
Street: **WINDSOX CT**	**$83,950.00**
Street: **WINTER WAY**	**$556,580.00**
Street: **WOLFTRAP CT**	**$139,980.00**
Street: **WOLFTRAP ST**	**$156,390.00**
Street: **WOODLANDS CT**	**$190,245.00**
Street: **WOODLANDS DR**	**$442,475.00**
Street: **WRENWOOD WAY**	**$431,995.00**
Street: **YEAGER RD**	**$86,660.00**
Street: **ZAK WAY**	**$556,542.50**
Street: **ZAPATA ST**	**$55,155.00**
Total Cost for City Sidewalks:	**$299,683,125.13**

COST SUMMARY

Note: The ROM cost estimates provided herein are opinions based on limited study and assumptions for final design. Any opinions of probable project cost or probable design, remediation or construction cost we provide are made on the basis of information available to us and on the basis of our experience and qualifications, and represents our judgment as experienced and qualified professional access consultant. However, since we have no control over the cost of labor, materials, equipment or services furnished by others, the contractor's methods of determining prices, or competitive bidding and market conditions, we do not guarantee that proposals, bids or actual project or design, remediation or construction cost will not vary from opinions of probable cost we prepare in this report.

10TH ST — Total Cost for Street: $509,985.00

Survey Street	Start Street	End Street	Orientation	Cost
10TH ST	S A ST	S B ST	NW	$86,880.00
10TH ST	S B ST	S A ST	SE	$177,165.00
10TH ST	S C ST	S B ST	SE	$157,040.00
10TH ST	S D ST	S C ST	SE	$88,900.00

11TH ST — Total Cost for Street: $921,705.00

Survey Street	Start Street	End Street	Orientation	Cost
11TH ST	631 S GATEWAY DR	S GATEWAY DR	NW	$18,960.00
11TH ST	700 S G ST	S G ST	SE	$10,920.00
11TH ST	700 S GATEWAY DR	S GATEWAY DR	SE	$25,710.00
11TH ST	S A ST	S LAKE ST	SE	$200,200.00
11TH ST	S B ST	S A ST	SE	$156,515.00
11TH ST	S C ST	S B ST	SE	$168,900.00
11TH ST	S D ST	S C ST	SE	$56,655.00
11TH ST	S G ST	701 S G ST	SE	$106,620.00
11TH ST	S GATEWAY DR	701 S GATEWAY DR	SE	$54,670.00
11TH ST	S LAKE ST	S A ST	NW	$122,555.00

12TH ST — Total Cost for Street: $768,245.00

Survey Street	Start Street	End Street	Orientation	Cost
12TH ST	112 12TH ST	S D ST	SE	$44,040.00
12TH ST	723 S G ST	S G ST	SE	$22,380.00
12TH ST	S A ST	ROOSEVELT AVE	SE	$238,650.00
12TH ST	S B ST	S C ST	NW	$136,815.00
12TH ST	S C ST	S B ST	SE	$197,320.00
12TH ST	S D ST	S C ST	SE	$75,115.00
12TH ST	S LAKE ST	S A ST	NW	$53,925.00

13TH ST — Total Cost for Street: $433,450.00

Survey Street	Start Street	End Street	Orientation	Cost
13TH ST	S A ST	S B ST	NW	$51,455.00
13TH ST	S B ST	S A ST	SE	$182,090.00
13TH ST	S C ST	S B ST	SE	$124,890.00
13TH ST	S D ST	S C ST	SE	$75,015.00

14TH ST — Total Cost for Street: $309,834.00

Survey Street	Start Street	End Street	Orientation	Cost
14TH ST	DON MIGUEL ST	S C ST	SE	$49,980.00
14TH ST	S B ST	S C ST	NW	$46,844.00
14TH ST	S C ST	ROOSEVELT AVE	SE	$164,950.00
14TH ST	S D ST	DON MIGUEL ST	NE	$48,060.00

1ST ST — Total Cost for Street: $61,642.50

Survey Street	Start Street	End Street	Orientation	Cost
1ST ST	N D ST	N E ST	NW	$61,642.50

2ND ST — Total Cost for Street: $152,505.00

Survey Street	Start Street	End Street	Orientation	Cost
2ND ST	424 N D ST	N D ST	SE	$28,920.00
2ND ST	501 N E ST	N E ST	NW	$6,555.00
2ND ST	N C ST	425 N C ST	SE	$117,030.00

3RD ST

Total Cost for Street: $485,947.50

Survey Street	Start Street	End Street	Orientation	Cost
3RD ST	401 N GATEWAY DR	N GATEWAY DR	NW	$16,775.00
3RD ST	CENTRAL AVE	N B ST	NW	$43,785.00
3RD ST	N B ST	CENTRAL AVE	SE	$79,980.00
3RD ST	N C ST	N D ST	NW	$50,575.00
3RD ST	N D ST	212 3RD ST	SE	$94,602.50
3RD ST	N E ST	323 N E ST	SE	$59,200.00
3RD ST	N G ST	N GATEWAY DR	SE	$87,855.00
3RD ST	N GATEWAY DR	319 N GATEWAY DR	SE	$53,175.00

4TH ST

Total Cost for Street: $827,705.00

Survey Street	Start Street	End Street	Orientation	Cost
4TH ST	621 4TH ST	621 4TH ST	NW	$33,660.00
4TH ST	LAKE ST	FLUME ST	SE	$149,150.00
4TH ST	N A ST	LAKE ST	SE	$103,155.00
4TH ST	N B ST	N A ST	SE	$113,415.00
4TH ST	N C ST	N B ST	SE	$139,680.00
4TH ST	N D ST	N C ST	SE	$125,720.00
4TH ST	N E ST	N GATEWAY DR	SW	$88,420.00
4TH ST	N GATEWAY DR	N E ST	SE	$74,505.00

5TH ST

Total Cost for Street: $1,872,792.50

Survey Street	Start Street	End Street	Orientation	Cost
5TH ST	201 HIGH ST	HIGH ST	NW	$36,300.00
5TH ST	201 N O ST	N O ST	NW	$20,565.00
5TH ST	323 5TH ST	N I ST	NW	$19,335.00
5TH ST	600 5TH ST	N K ST	SE	$46,635.00
5TH ST	817 5TH ST	N N ST	NW	$38,620.00
5TH ST	908 5TH ST	920 5TH ST	SE	$5,475.00
5TH ST	FLUME ST	HIGH ST	SE	$138,545.00
5TH ST	HIGH ST	804 5TH ST	SE	$130,800.00
5TH ST	N A ST	N LAKE ST	SE	$129,182.50
5TH ST	N B ST	N A ST	SE	$148,855.00
5TH ST	N C ST	N B ST	SE	$204,140.00
5TH ST	N D ST	N C ST	SE	$153,075.00
5TH ST	N E ST	N D ST	SE	$81,265.00
5TH ST	N I ST	312 5TH ST	SE	$214,020.00
5TH ST	N J ST	413 YOSEMITE ST	SE	$10,470.00
5TH ST	N K ST	N L ST	NW	$109,440.00
5TH ST	N L ST	N M ST	NW	$52,480.00
5TH ST	N LAKE ST	N A ST	NW	$92,180.00
5TH ST	N Q ST	131 N Q ST	SE	$45,990.00
5TH ST	PINE ST	N Q ST	SE	$99,375.00
5TH ST	S LAKE ST	FLUME ST	SE	$64,215.00
5TH ST	S M ST	716 5TH ST	SE	$31,830.00

6TH ST

Total Cost for Street: $2,819,462.50

Survey Street	Start Street	End Street	Orientation	Cost
6TH ST	1005 6TH ST	1005 6TH ST	NW	$12,015.00
6TH ST	1025 S P ST	S P ST	NW	$26,010.00
6TH ST	123 S LAKE ST	S LAKE ST	NW	$37,290.00

6TH ST	516 6TH ST	S LAKE ST	SE	$40,125.00
6TH ST	617 6TH ST	615 6TH ST	NW	$33,495.00
6TH ST	620 6TH ST	620 6TH ST	SE	$25,590.00
6TH ST	634 6TH ST	VINEYARD AVE	SE	$12,240.00
6TH ST	700 YOSEMITE AVE	VINEYARD AVE	NW	$293,692.50
6TH ST	N I ST	N J ST	NW	$110,985.00
6TH ST	N J ST	N I ST	SE	$107,248.00
6TH ST	N K ST	N J ST	SE	$107,432.50
6TH ST	N L ST	N K ST	SE	$182,295.00
6TH ST	N M ST	N N ST	NW	$98,962.50
6TH ST	N N ST	N M ST	SE	$303,820.00
6TH ST	N O ST	N N ST	SE	$100,395.00
6TH ST	RAILROAD TRACKS	S E ST	SE	$22,980.00
6TH ST	S A ST	510 6TH ST	SE	$133,245.00
6TH ST	S B ST	S A ST	SE	$181,200.00
6TH ST	S C ST	S B ST	SE	$231,442.50
6TH ST	S D ST	S C ST	SE	$288,252.00
6TH ST	S E ST	S D ST	SE	$194,070.00
6TH ST	S GATEWAY DR	RAILROAD TRACKS	SE	$23,520.00
6TH ST	S LAKE ST	612 6TH ST	SE	$144,520.00
6TH ST	S P ST	S O ST	SE	$93,577.50
6TH ST	VINEYARD AVE	635 6TH ST	SE	$15,060.00

7TH ST

Total Cost for Street: **$765,171.00**

Survey Street	Start Street	End Street	Orientation	Cost
7TH ST	225 N J ST	N J ST	NW	$20,715.00
7TH ST	300 S J ST	S J ST	SE	$42,135.00
7TH ST	308 S D ST	S D ST	SE	$15,480.00
7TH ST	N I ST	224 1/2 N I ST	NW	$74,790.00
7TH ST	N J ST	N I ST	SE	$151,440.00
7TH ST	N K ST	N L ST	NW	$81,535.00
7TH ST	N L ST	612 7TH ST	SE	$20,542.50
7TH ST	N N ST	N O ST	NW	$86,252.50
7TH ST	N O ST	N N ST	SE	$88,045.00
7TH ST	S C ST	S D ST	NW	$48,720.00
7TH ST	S D ST	305 S D ST	SE	$84,786.00
7TH ST	S E ST	308 D ST	SE	$50,730.00

8TH ST

Total Cost for Street: **$374,802.00**

Survey Street	Start Street	End Street	Orientation	Cost
8TH ST	829 8TH ST	S I ST	NW	$34,176.00
8TH ST	N I ST	N K ST	NW	$114,720.00
8TH ST	N J ST	N I ST	SE	$93,024.00
8TH ST	N K ST	S J ST	SE	$99,315.00
8TH ST	N L ST	401 8TH ST	SE	$14,115.00
8TH ST	S I ST	310 W 8TH ST	SE	$19,452.00

9TH ST

Total Cost for Street: **$424,470.00**

Survey Street	Start Street	End Street	Orientation	Cost
9TH ST	211 9TH ST	S D ST	NW	$41,205.00
9TH ST	500 S D ST	S D ST	SE	$19,940.00
9TH ST	614 9TH ST	614 9TH ST	SE	$23,760.00
9TH ST	615 9TH ST	S LAKE ST	NW	$53,140.00

9TH ST	S B ST	313 9TH ST	NW	$25,995.00
9TH ST	S C ST	S B ST	SE	$169,420.00
9TH ST	S D ST	S C ST	SE	$91,010.00

A ST

Total Cost for Street: $1,026,713.00

Survey Street	Start Street	End Street	Orientation	Cost
A ST	HULL AVE	KNOX CT	S	$311,055.00
A ST	KENNEY CT	KNOX AVE	N	$144,438.00
A ST	KNOX AVE	STINSON AVE	N	$82,880.00
A ST	KNOX CT	295 KNOX CT	S	$37,455.00
A ST	RD 28	KENNEY CT	N	$114,120.00
A ST	ROOSEVELT AVE	WALLACE AVE	S	$84,080.00
A ST	STINSON AVE	HULL AVE	N	$105,000.00
A ST	WALLACE AVE	HULL AVE	S	$147,685.00

ACCORNERO AVE

Total Cost for Street: $117,825.00

Survey Street	Start Street	End Street	Orientation	Cost
ACCORNERO AVE	512 ACCORNERO AVE	NATIONAL AVE	W	$67,860.00
ACCORNERO AVE	SUNSET AVE	516 ACCORNERO AVE	W	$49,965.00

ACORN CT

Total Cost for Street: $130,410.00

Survey Street	Start Street	End Street	Orientation	Cost
ACORN CT	1490 ACORN CT	1491 ACORN CT	E	$23,820.00
ACORN CT	1491 ACORN CT	CHESTNUT AVE	E	$49,020.00
ACORN CT	CHESTNUT AVE	1490 ACORN CT	W	$57,570.00

ADAMS AVE

Total Cost for Street: $141,294.00

Survey Street	Start Street	End Street	Orientation	Cost
ADAMS AVE	E ELLIS ST	EISENHOWER LN	W	$32,520.00
ADAMS AVE	E KENNEDY ST	TYLER LN	E	$44,595.00
ADAMS AVE	EISENHOWER LN	E ELLIS ST	E	$24,660.00
ADAMS AVE	TYLER LN	E KENNEDY ST	W	$39,519.00

ADANAC CT

Total Cost for Street: $44,820.00

Survey Street	Start Street	End Street	Orientation	Cost
ADANAC CT	1714 ADANAC CT	ADANAC WAY	E	$23,595.00
ADANAC CT	ADANAC WAY	1714 ADANAC CT	W	$21,225.00

ADANAC WAY

Total Cost for Street: $740,206.00

Survey Street	Start Street	End Street	Orientation	Cost
ADANAC WAY	1200 ADANAC WAY	1713 ADANAC WAY	S	$627.00
ADANAC WAY	1202 ADANAC WAY	JESSE DR	S	$21,225.00
ADANAC WAY	1205 ADANAC WAY,	1200 ADANAC WAY	N	$16,476.00
ADANAC WAY	ADANAC CT	MADISON DR	S	$67,800.00
ADANAC WAY	DOMINGUEZ DR	JESSE DR	N	$129,840.00
ADANAC WAY	JERICHO DR	ADANAC CT	S	$142,580.00
ADANAC WAY	JESSE DR	JERICHO DR	S	$264,308.00
ADANAC WAY	MADISON DR	JERICHO DR	N	$97,350.00

ADELAIDE AVE

Total Cost for Street: $1,056,210.00

Survey Street	Start Street	End Street	Orientation	Cost
ADELAIDE AVE	517 ADELAIDE AVE	CANAL ST	NE	$107,090.00
ADELAIDE AVE	636 ADELAIDE AVE	SUNRISE AVE	SW	$219,555.00
ADELAIDE AVE	678 ADELAIDE AVE	SAWMILL ST	NE	$90,720.00
ADELAIDE AVE	CANAL ST	636 ADELAIDE AVE	SW	$298,270.00

ADELAIDE AVE	SAWMILL ST	519 ADELAIDE AVE	NE	$91,720.00
ADELAIDE AVE	SUNRISE AVE	701 ADELAIDE AVE	NE	$248,855.00

ADELL ST

Total Cost for Street: **$527,692.00**

Survey Street	Start Street	End Street	Orientation	Cost
ADELL ST	100 ADELL ST	SONORA ST	S	$125,460.00
ADELL ST	101 ADELL ST	101 ADELL ST	N	$41,175.00
ADELL ST	102 ADELL ST	26339 ADELL ST	N	$156,940.00
ADELL ST	26988 E ADELL ST	N LAKE ST	S	$19,575.00
ADELL ST	LAKE ST.	1807 LAKE ST.	N	$6,330.00
ADELL ST	SONORA ST	N D ST	S	$178,212.00

AIRPORT DR

Total Cost for Street: **$1,221,395.00**

Survey Street	Start Street	End Street	Orientation	Cost
AIRPORT DR	2871 AIRPORT DR	2871 AIRPORT DR	SE	$120,070.00
AIRPORT DR	2900 AIRPORT DR	AVIATION DR	NW	$337,605.00
AIRPORT DR	2985 AIRPORT DR	YEAGER RD	E	$118,795.00
AIRPORT DR	AVE 17	3254 AIRPORT DR	W	$78,375.00
AIRPORT DR	AVIATION DR	2801 AIRPORT DR	SE	$62,340.00
AIRPORT DR	CURB RAMP	3100 AIRPORT DR	W	$423,015.00
AIRPORT DR	PARKING LOT ENTRANCE	CURB RAMP	W	$81,195.00

ALDERWOOD CT

Total Cost for Street: **$108,240.00**

Survey Street	Start Street	End Street	Orientation	Cost
ALDERWOOD CT	2358 ALDERWOOD CT	N SCHNOOR AVE	S	$55,500.00
ALDERWOOD CT	N SCHNOOR AVE	2358 ALDERWOOD CT	N	$52,740.00

ALEXIS WAY

Total Cost for Street: **$137,842.50**

Survey Street	Start Street	End Street	Orientation	Cost
ALEXIS WAY	KIMBERLEY LN	MACADAMIA AVE	E	$70,770.00
ALEXIS WAY	MACADAMIA AVE	KIMBERLEY LN	W	$67,072.50

ALICANTE WAY

Total Cost for Street: **$464,837.50**

Survey Street	Start Street	End Street	Orientation	Cost
ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	E	$226,335.00
ALICANTE WAY	LAGUNA WAY	1269 ALICANTE WAY	E	$13,680.00
ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	W	$224,822.50

ALMOND AVE

Total Cost for Street: **$3,073,149.88**

Survey Street	Start Street	End Street	Orientation	Cost
ALMOND AVE	1209 ALMOND AVE	1209 ALMOND AVE	N	$63,375.00
ALMOND AVE	201 ALMOND AVE	MONTEREY DR	N	$33,408.00
ALMOND AVE	220 ALMOND AVE	EMILY WAY	S	$352,600.00
ALMOND AVE	401 ALMOND AVE	363 ALMOND AVE	N	$66,475.00
ALMOND AVE	800 MADERA AVE	MADERA AVE	S	$212,112.00
ALMOND AVE	850 RUBICON AVE	RUBICON AVE	S	$37,320.00
ALMOND AVE	BARNETT WAY	1200 ALMOND AVE	S	$127,830.00
ALMOND AVE	EMILY WAY	BARNETT WAY	S	$356,730.00
ALMOND AVE	HAZELNUT DR	LEMON TREE DR	S	$130,200.00
ALMOND AVE	LEMON TREE DR	TOSCHI DR	S	$118,815.00
ALMOND AVE	MADERA AVE	201 ALMOND AVE	N	$50,795.00
ALMOND AVE	MONTEREY DR	865 MONTEREY DR	S	$193,965.00
ALMOND AVE	OAKRIDGE DR	MONTEREY DR	S	$524,629.88
ALMOND AVE	PARKING LOT ENTRANCE	MADERA AVE	N	$131,640.00
ALMOND AVE	RUBICON AVE	IVY GLEN DR	W	$418,435.00

ALMOND AVE	SANTA BONITA ST	OAKRIDGE DR	N	$38,055.00
ALMOND AVE	STADIUM RD	OAKRIDGE DR	S	$121,560.00
ALMOND AVE	TOSCHI DR	GRANADA DR	S	$95,205.00

AMY AVE — Total Cost for Street: $163,808.00

Survey Street	Start Street	End Street	Orientation	Cost
AMY AVE	KATHRYN AVE	LACRETA AVE	W	$96,093.00
AMY AVE	LACRETA AVE	KATHRYN AVE	E	$67,715.00

ANGEL FALLS CT — Total Cost for Street: $47,955.00

Survey Street	Start Street	End Street	Orientation	Cost
ANGEL FALLS CT	CAPISTRANO DR	CAPISTRANO DR	E/N/	$47,955.00

ANNA AVE — Total Cost for Street: $125,460.00

Survey Street	Start Street	End Street	Orientation	Cost
ANNA AVE	CARMEN AVE	KATHRYN AVE	W	$81,375.00
ANNA AVE	KATHRYN AVE	CARMEN AVE	E	$44,085.00

APPLE CT — Total Cost for Street: $112,716.00

Survey Street	Start Street	End Street	Orientation	Cost
APPLE CT	HACIENDA ST	HACIENDA ST	N/W/	$112,716.00

APPLE ST — Total Cost for Street: $87,318.00

Survey Street	Start Street	End Street	Orientation	Cost
APPLE ST	HACIENDA ST	PEAR ST	S	$56,052.00
APPLE ST	PEAR ST	HACIENDA ST	N	$31,266.00

APPLE TREE CT — Total Cost for Street: $39,955.00

Survey Street	Start Street	End Street	Orientation	Cost
APPLE TREE CT	PEACH TREE DR	PEACH TREE DR	S/E/	$39,955.00

APPLE TREE DR — Total Cost for Street: $184,095.00

Survey Street	Start Street	End Street	Orientation	Cost
APPLE TREE DR	2668 APPLE TREE DR	TOSCHI DR	S	$26,820.00
APPLE TREE DR	BERRY DR	2682 APPLE TREE DR	S	$25,290.00
APPLE TREE DR	GRANADA DR	TOSCHI DR	N	$26,655.00
APPLE TREE DR	TOSCHI DR	GRANADA DR	S	$105,330.00

ARAM AVE — Total Cost for Street: $119,950.50

Survey Street	Start Street	End Street	Orientation	Cost
ARAM AVE	1015 ARAM AVE	RIVERVIEW DR	E	$34,870.50
ARAM AVE	RIVERVIEW DR	W CENTRAL AVE	W	$38,739.00
ARAM AVE	W CENTRAL AVE	W CENTRAL AVE	W	$46,341.00

ARBELLA LN — Total Cost for Street: $455,565.00

Survey Street	Start Street	End Street	Orientation	Cost
ARBELLA LN	DUTRA WAY	JONATHAN WAY	E	$232,110.00
ARBELLA LN	FREDERICK WAY	JUDITH WAY	W	$61,860.00
ARBELLA LN	JONATHAN WAY	FREDERICK WAY	W	$74,820.00
ARBELLA LN	JUDITH WAY	DUTRA WAY	W	$86,775.00

ARDILLA DR — Total Cost for Street: $719,840.00

Survey Street	Start Street	End Street	Orientation	Cost
ARDILLA DR	BRIDGE WAY	MONARCH RD	N	$76,380.00
ARDILLA DR	KNOX ST	MARIPOSA ST	S	$257,420.00
ARDILLA DR	LOS CERRITOS WAY	KNOX ST	S	$95,685.00
ARDILLA DR	MARIPOSA ST	BRIDGE WAY	S	$84,940.00

ARDILLA DR	MONARCH RD	KNOX ST	N	$205,415.00

ARIES CT

Total Cost for Street: $111,615.00

Survey Street	Start Street	End Street	Orientation	Cost
ARIES CT	3256 ARIES CT	GLENVILLE AVE	S	$49,005.00
ARIES CT	GLENVILLE AVE	3256 ARIES CT	N	$62,610.00

ARTHUR CT

Total Cost for Street: $128,367.50

Survey Street	Start Street	End Street	Orientation	Cost
ARTHUR CT	JEFFERSON AVE	JEFFERSON AVE	EN/	$128,367.50

ASHBURY CT

Total Cost for Street: $229,845.00

Survey Street	Start Street	End Street	Orientation	Cost
ASHBURY CT	3275 ASHBURY CT	GLENVILLE AVE	S	$33,435.00
ASHBURY CT	GLADE AVE	3275 ASHBURY CT	N	$105,330.00
ASHBURY CT	GLENVILLE AVE	GLADE AVE	S	$91,080.00

ASHLAN WAY

Total Cost for Street: $1,248,197.00

Survey Street	Start Street	End Street	Orientation	Cost
ASHLAN WAY	1501 LAKE ST	N LAKE ST	N	$1,560.00
ASHLAN WAY	412 ASHLAN WAY	AUSTIN AVE	S	$144,195.00
ASHLAN WAY	AUSTIN AVE	N LAKE ST	S	$335,780.00
ASHLAN WAY	LUCIA WAY	NOREEN WAY	S	$80,472.00
ASHLAN WAY	N D ST	408 ASHLAN WAY	S	$114,456.00
ASHLAN WAY	N LAKE ST	417 N LAKE ST	S	$263,598.00
ASHLAN WAY	NOREEN WAY	N D ST	S	$133,596.00
ASHLAN WAY	POPOLI WAY	SONORA ST	N	$106,992.00
ASHLAN WAY	SONORA ST	LUCIA WAY	S	$67,548.00

ASILOMAR DR

Total Cost for Street: $497,355.00

Survey Street	Start Street	End Street	Orientation	Cost
ASILOMAR DR	HOWARD RD	MARINA DR	E	$33,600.00
ASILOMAR DR	MANRESA DR	SAN JUAN DR	E	$62,880.00
ASILOMAR DR	MARINA DR	SEASIDE DR	E	$51,765.00
ASILOMAR DR	POINT SUR DR	HOWARD RD	W	$240,285.00
ASILOMAR DR	SAN JUAN DR	POINT SUR DR	E	$78,480.00
ASILOMAR DR	SEASIDE DR	MANRESA DR	E	$30,345.00

ASPEN LN

Total Cost for Street: $555,354.00

Survey Street	Start Street	End Street	Orientation	Cost
ASPEN LN	2392 BEECHWOOD WAY	BEECHWOOD WAY	E	$35,520.00
ASPEN LN	BEECHWOOD WAY	MEADOWREST WAY	W	$94,425.00
ASPEN LN	FOXGLOVE WAY	PLUMWOOD WAY	W	$69,354.00
ASPEN LN	GRAPEWOOD WAY	BEECHWOOD WAY	W	$181,785.00
ASPEN LN	MEADOWREST WAY	W CLEVELAND AVE	W	$36,060.00
ASPEN LN	PLUMWOOD WAY	GRAPEWOOD WAY	W	$51,390.00
ASPEN LN	W CLEVELAND AVE	2425 ASPEN LN	E	$86,820.00

ASTI WAY

Total Cost for Street: $206,094.00

Survey Street	Start Street	End Street	Orientation	Cost
ASTI WAY	226 ASTI WAY	LUCIA WAY	N	$42,003.00
ASTI WAY	LUCIA WAY	226 ASTI WAY	S	$27,555.00
ASTI WAY	N D ST	NOREEN WAY	N	$64,368.00
ASTI WAY	NOREEN WAY	N D ST	S	$72,168.00

AUSTIN AVE

Total Cost for Street: **$1,018,605.00**

Survey Street	Start Street	End Street	Orientation	Cost
AUSTIN AVE	1025 AUSTIN AVE	E CLEVELAND AVE	E	$43,980.00
AUSTIN AVE	1326 AUSTIN AVE	1316 AUSTIN AVE	W	$19,935.00
AUSTIN AVE	621 E CLARK ST	E CLARK ST	W	$23,949.00
AUSTIN AVE	700 GREEN WAY	GREEN WAY	E	$35,520.00
AUSTIN AVE	ASHLAN WAY	JAMES WAY	W	$71,193.00
AUSTIN AVE	E CLARK ST	ASHLAN WAY	W	$64,560.00
AUSTIN AVE	E LINCOLN AVE	W SOUTH ST	W	$184,275.00
AUSTIN AVE	E RIVERSIDE DR	W SOUTH ST	E	$90,495.00
AUSTIN AVE	GREEN WAY	W SHERWOOD WAY	E	$64,260.00
AUSTIN AVE	JAMES WAY	ASHLAN WAY	E	$77,940.00
AUSTIN AVE	RUSH ST	924 AUSTIN AVE	W	$16,845.00
AUSTIN AVE	W SHERWOOD WAY	WESSMITH WAY	E	$92,265.00
AUSTIN AVE	W SOUTH ST	E RIVERSIDE DR	W	$172,590.00
AUSTIN AVE	WESSMITH WAY	JAMES WAY	E	$60,798.00

AVALON AVE

Total Cost for Street: **$263,395.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVALON AVE	KENT DR	ZAK WAY	S	$127,475.00
AVALON AVE	ZAK WAY	KENT DR	N	$135,920.00

AVE 13

Total Cost for Street: **$174,450.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVE 13	WATT ST	367 PECAN AVE	N	$174,450.00

AVE 14

Total Cost for Street: **$100,035.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVE 14	28123 AVE 14	28123 AVE 14	N	$67,755.00
AVE 14	28198 AVE 14	28198 AVE 14	S	$32,280.00

AVE 17

Total Cost for Street: **$307,515.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVE 17	3175 AVENUE 17	3175 AVENUE 17	S	$54,615.00
AVE 17	3254 AIRPORT DR	3254 AIRPORT DR	S	$76,590.00
AVE 17	4130 AIRPORT DR	AIRPORT DR	S	$41,355.00
AVE 17	PARKING LOT ENTRANCE	SHARON BVD	S	$134,955.00

AVENUE 17

Total Cost for Street: **$6,120.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVENUE 17	24682 AVENUE 17	24658 AVENUE 17	S	$6,120.00

AVIATION DR

Total Cost for Street: **$81,120.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVIATION DR	2801 AIRPORT DR	AIRPORT DR	NE	$13,200.00
AVIATION DR	3211 AVIATION DR	3211 AVIATION DR	N	$67,920.00

AVILA WAY

Total Cost for Street: **$190,218.00**

Survey Street	Start Street	End Street	Orientation	Cost
AVILA WAY	431 FIG AVE	MANZANA CT	SE	$118,740.00
AVILA WAY	FIG AVE	431 FIG AVE	SE	$3,540.00
AVILA WAY	MANZANA CT	FIG AVE	NW	$67,938.00

AWAHNEE CT

Total Cost for Street: **$82,080.00**

Survey Street	Start Street	End Street	Orientation	Cost

AWAHNEE CT	MONTEREY ST	MONTEREY ST	N/W/	$82,080.00

AZURE DR — Total Cost for Street: $349,370.00

Survey Street	Start Street	End Street	Orientation	Cost
AZURE DR	1912 AZURE DR	1912 AZURE DR	E	$4,080.00
AZURE DR	1913 AZURE DR	IVORY CT	E	$95,760.00
AZURE DR	2240 AZURE DR	SCARLET DR	W	$12,800.00
AZURE DR	2250 AZURE DR	2250 AZURE DR	W	$10,920.00
AZURE DR	2290 AZURE DR	2260 AZURE DR	W	$29,820.00
AZURE DR	2380 AZURE DR	2290 AZURE DR	W	$67,110.00
AZURE DR	IVORY CT	UMBER DR	E	$78,900.00
AZURE DR	SCARLET DR	1912 AZURE DR	E	$49,980.00

BALSAM CT — Total Cost for Street: $137,445.00

Survey Street	Start Street	End Street	Orientation	Cost
BALSAM CT	N GRANADA DR	N GRANADA DR	N / S	$137,445.00

BARBERA AVE — Total Cost for Street: $152,630.00

Survey Street	Start Street	End Street	Orientation	Cost
BARBERA AVE	GAMAY AVE	MERLOT AVE	W	$81,525.00
BARBERA AVE	MERLOT AVE	GAMAY AVE	E	$71,105.00

BARCELONA WAY — Total Cost for Street: $380,367.00

Survey Street	Start Street	End Street	Orientation	Cost
BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	E	$213,860.00
BARCELONA WAY	SEGOVIA CT	WESSMITH WAY	W	$82,627.00
BARCELONA WAY	WESSMITH WAY	LAGUNA WAY	W	$83,880.00

BARNETT WAY — Total Cost for Street: $573,820.00

Survey Street	Start Street	End Street	Orientation	Cost
BARNETT WAY	865 MACADAMIA AVE	MACADAMIA AVE	W	$34,620.00
BARNETT WAY	ALMOND AVE	950 BARNETT WAY	W	$153,255.00
BARNETT WAY	MACADAMIA AVE	PECAN AVE	W	$197,280.00
BARNETT WAY	STREET END	ALMOND AVE	E	$188,665.00

BARON ST — Total Cost for Street: $249,412.50

Survey Street	Start Street	End Street	Orientation	Cost
BARON ST	3470 BARON ST	WESTBERRY BVD	S	$120,795.00
BARON ST	LIBERTY LN	3470 BARON ST	S	$11,100.00
BARON ST	WESTBERRY BVD	LIBERTY LN	N	$117,517.50

BAY CT — Total Cost for Street: $155,170.00

Survey Street	Start Street	End Street	Orientation	Cost
BAY CT	MAINBERRY DR	MAINBERRY DR	S/E/	$155,170.00

BAY VIEW DR — Total Cost for Street: $180,195.00

Survey Street	Start Street	End Street	Orientation	Cost
BAY VIEW DR	HARBOR DR	SAND DOLLAR CT	N	$27,000.00
BAY VIEW DR	MAINBERRY DR	HARBOR DR	S	$126,765.00
BAY VIEW DR	SAND DOLLAR CT	MAINBERRY DR	N	$26,430.00

BAYLOR CT — Total Cost for Street: $56,940.00

Survey Street	Start Street	End Street	Orientation	Cost
BAYLOR CT	JEFFERSON AVE	JEFFERSON AVE	E/N/	$56,940.00

BEECHWOOD WAY — Total Cost for Street: $820,659.00

Survey Street	Start Street	End Street	Orientation	Cost

BEECHWOOD WAY	ASPEN LN	N SCHNOOR AVE	S	$421,114.00
BEECHWOOD WAY	N SCHNOOR AVE	ASPEN LN	N	$225,085.00
BEECHWOOD WAY	SUNDANCE LN	ASPEN LN	S	$174,460.00

BENT OAK TR

Total Cost for Street: **$84,055.00**

Survey Street	Start Street	End Street	Orientation	Cost
BENT OAK TR	CROWN TERRACE	ORCHARD HILL DR	E	$5,280.00
BENT OAK TR	IVY GLEN DR	CROWN TERRACE	E	$41,400.00
BENT OAK TR	ORCHARD HILL DR	IVY GLEN DR	W	$37,375.00

BERNARDI AVE

Total Cost for Street: **$244,110.00**

Survey Street	Start Street	End Street	Orientation	Cost
BERNARDI AVE	729 BERNARDI AVE	STADIUM RD	N	$72,075.00
BERNARDI AVE	MUNRAS AVE	729 BERNARDI AVE	N	$30,975.00
BERNARDI AVE	STADIUM RD	MUNRAS AVE	S	$141,060.00

BERRY DR

Total Cost for Street: **$429,275.00**

Survey Street	Start Street	End Street	Orientation	Cost
BERRY DR	APPLE TREE DR	PEANUT DR	E	$75,015.00
BERRY DR	CHERRY TREE DR	ORANGE TREE DR	E	$33,525.00
BERRY DR	ORANGE TREE DR	APPLE TREE DR	E	$70,380.00
BERRY DR	PEANUT DR	PEAR TREE DR	E	$62,895.00
BERRY DR	PEAR TREE DR	CHERRY TREE DR	W	$187,460.00

BERRY DRIVE

Total Cost for Street: **$90,165.00**

Survey Street	Start Street	End Street	Orientation	Cost
BERRY DRIVE	MAPLE STREET	PLUMAS STREET	E	$62,925.00
BERRY DRIVE	PLUMAS STREET	MAPLE STREET	W	$27,240.00

BILBAO CT

Total Cost for Street: **$208,845.00**

Survey Street	Start Street	End Street	Orientation	Cost
BILBAO CT	1407 BILBAO CT	SAN SEBASTIAN WAY	N	$74,175.00
BILBAO CT	SAN SEBASTIAN WAY	1407 BILBAO CT	S	$134,670.00

BLOKER ST

Total Cost for Street: **$13,035.00**

Survey Street	Start Street	End Street	Orientation	Cost
BLOKER ST	E LINCOLN AVE	828 BLOKER ST	W	$13,035.00

BLUEBERRY LN

Total Cost for Street: **$82,966.50**

Survey Street	Start Street	End Street	Orientation	Cost
BLUEBERRY LN	712 BLUEBERRY LN	E ALMOND AVE	W	$42,511.50
BLUEBERRY LN	E ALMOND AVE	MADARIN ST	E	$39,645.00
BLUEBERRY LN	MADARIN ST	692 BLUEBERRY LN	W	$810.00

BLUERIDGE DR

Total Cost for Street: **$243,475.00**

Survey Street	Start Street	End Street	Orientation	Cost
BLUERIDGE DR	414 BLUERIDGE DR	GAMAY ST	W	$40,680.00
BLUERIDGE DR	709 DEERWOOD DR	MERLOT AVE	E	$61,335.00
BLUERIDGE DR	DEERWOOD DR	705 DEERWOOD DR	E	$8,220.00
BLUERIDGE DR	GAMAY ST	404 BLUERIDGE DR	E/N	$57,640.00
BLUERIDGE DR	MERLOT AVE	DEERWOOD DR	W	$75,600.00

BO TREE LN

Total Cost for Street: **$263,695.00**

Survey Street	Start Street	End Street	Orientation	Cost
BO TREE LN	CRYSTAL WAY	EMILY WAY	S	$35,760.00
BO TREE LN	DIAMOND WAY	MAJESTIC WAY	S	$58,455.00

BO TREE LN	EMILY WAY	DIAMOND WAY	N	$130,000.00
BO TREE LN	MAJESTIC WAY	CRYSTAL WAY	S	$39,480.00

BOLINAS WAY — *Total Cost for Street:* $29,760.00

Survey Street	Start Street	End Street	Orientation	Cost
BOLINAS WAY	IVY GLEN DR	ORCHARD HILL DR	E	$29,760.00

BOULDER AVE — *Total Cost for Street:* $447,930.00

Survey Street	Start Street	End Street	Orientation	Cost
BOULDER AVE	BOULDER PL	DOUBLE TREE WAY	S	$60,680.00
BOULDER AVE	DOUBLE TREE WAY	DOUBLE TREE WAY	S / N	$282,730.00
BOULDER AVE	SUBURBAN AVE	BOULDER PL	S	$104,520.00

BOULDER PL — *Total Cost for Street:* $16,605.00

Survey Street	Start Street	End Street	Orientation	Cost
BOULDER PL	BOULDER AVE	BOULDER AVE	S	$16,605.00

BRIDGE WAY — *Total Cost for Street:* $308,050.00

Survey Street	Start Street	End Street	Orientation	Cost
BRIDGE WAY	ARDILLA DR	TRAIL WAY	E	$84,220.00
BRIDGE WAY	DOME AVE	ARDILLA DR	W	$135,965.00
BRIDGE WAY	TRAIL WAY	DOME AVE	E	$87,865.00

BRIQUEL AVE — *Total Cost for Street:* $170,115.00

Survey Street	Start Street	End Street	Orientation	Cost
BRIQUEL AVE	CARMEN AVE	LA JOLLA WY	E	$85,695.00
BRIQUEL AVE	LA JOLLA CT	CARMEN AVE	W	$84,420.00

BUENA VENTURA CT — *Total Cost for Street:* $84,815.00

Survey Street	Start Street	End Street	Orientation	Cost
BUENA VENTURA CT	CAITLAN DR	CAITLAN DR	S/E/	$84,815.00

CAITLAN DR — *Total Cost for Street:* $461,205.00

Survey Street	Start Street	End Street	Orientation	Cost
CAITLAN DR	BUENA VENTURA CT	LOS OSOS CT	E	$56,640.00
CAITLAN DR	FIESTA DR	ISLA VISTA CT	W	$75,360.00
CAITLAN DR	ISLA VISTA CT	886 ISLA VISTA CT	W	$71,795.00
CAITLAN DR	LOS OSOS CT	RIVERVIEW DR	E	$84,015.00
CAITLAN DR	RIVERVIEW DR	FIESTA DR	W	$80,980.00
CAITLAN DR	VIA DE ORO	ISLA VISTA CT	E	$92,415.00

CAITLAN DRIVE — *Total Cost for Street:* $163,545.00

Survey Street	Start Street	End Street	Orientation	Cost
CAITLAN DRIVE	SUNSET AVE	VIA SANTA BARBARA	E	$29,280.00
CAITLAN DRIVE	VIA CAPITOLA	VIA DE ORO	E	$66,600.00
CAITLAN DRIVE	VIA SANTA BARBARA	VIA CAPITOLA	E	$67,665.00

CAMBRIA AVE — *Total Cost for Street:* $407,655.00

Survey Street	Start Street	End Street	Orientation	Cost
CAMBRIA AVE	KENT DR	402 KENT DR	N	$48,960.00
CAMBRIA AVE	STREET END	WESTBERRY BVD	S	$189,840.00
CAMBRIA AVE	WESTBERRY BVD	ZAK WAY	N	$37,500.00
CAMBRIA AVE	ZAK WAY	KENT DR	N	$131,355.00

CANAL ST — *Total Cost for Street:* $482,440.00

Survey Street	Start Street	End Street	Orientation	Cost
CANAL ST	ADELAIDE AVE	LILLY ST	S	$252,105.00

CANAL ST	CANAL ST	LILLY ST	W	$11,796.00
CANAL ST	LILLY ST	VINEYARD AVE	N	$119,515.00
CANAL ST	VINEYARD AVE	ADELAIDE AVE	S	$99,024.00

CAPISTRANO DR

Total Cost for Street: **$274,345.00**

Survey Street	Start Street	End Street	Orientation	Cost
CAPISTRANO DR	ANGEL FALLS CT	S TIMBERLINE DR	N	$26,370.00
CAPISTRANO DR	S TIMBERLINE DR	S WOLFTRAP ST	S	$145,615.00
CAPISTRANO DR	S WOLFTRAP ST	ANGEL FALLS CT	N	$102,360.00

CARMEL ST

Total Cost for Street: **$127,090.00**

Survey Street	Start Street	End Street	Orientation	Cost
CARMEL ST	FRITZ ST	SOLANO ST	N	$73,975.00
CARMEL ST	SOLANO ST	FRITZ ST	S	$53,115.00

CARMEN AVE

Total Cost for Street: **$361,308.00**

Survey Street	Start Street	End Street	Orientation	Cost
CARMEN AVE	1420 CARMEN AVE	BRIQUEL AVE	N	$90,369.00
CARMEN AVE	ANNA AVE	1420 CARMEN AVE	S	$44,920.00
CARMEN AVE	BRIQUEL AVE	MERCED ST	N	$69,160.00
CARMEN AVE	MERCED ST	ANNA AVE	S	$156,859.00

CARRY AVE

Total Cost for Street: **$123,980.00**

Survey Street	Start Street	End Street	Orientation	Cost
CARRY AVE	KNOX AVE	LILLY ST	S	$43,700.00
CARRY AVE	LILLY ST	KNOX AVE	N	$80,280.00

CASHEW CT

Total Cost for Street: **$132,525.00**

Survey Street	Start Street	End Street	Orientation	Cost
CASHEW CT	1463 CASHEW CT	CHESTNUT AVE	E	$37,380.00
CASHEW CT	1492 CASHEW CT	1493 CASHEW CT	E	$34,455.00
CASHEW CT	CHESTNUT AVE	1492 CASHEW CT	W	$60,690.00

CEDAR CREEK LN

Total Cost for Street: **$287,475.00**

Survey Street	Start Street	End Street	Orientation	Cost
CEDAR CREEK LN	3014 FOREST LN	3014 FOREST LN	W	$38,760.00
CEDAR CREEK LN	CREEK DR	TIMBERLINE DR	N	$45,750.00
CEDAR CREEK LN	TIMBERLINE DR	CREEK DR	S	$162,015.00
CEDAR CREEK LN	WESTBERRY BVD	TIMBERLINE DR	S	$40,950.00

CENTRAL AVE

Total Cost for Street: **$610,300.00**

Survey Street	Start Street	End Street	Orientation	Cost
CENTRAL AVE	N A ST	N LAKE ST	S	$155,225.00
CENTRAL AVE	N B ST	3RD ST	S	$150,020.00
CENTRAL AVE	N C ST	2ND ST	S	$14,580.00
CENTRAL AVE	N D ST	N C ST	S	$74,760.00
CENTRAL AVE	N LAKE ST	N A ST	N	$145,015.00
CENTRAL AVE	RIVERWALK DR	N D ST	N	$70,700.00

CENTRAL CT

Total Cost for Street: **$22,284.00**

Survey Street	Start Street	End Street	Orientation	Cost
CENTRAL CT	W CENTRAL AVE	W CENTRAL AVE	E/N/	$22,284.00

CENTRAL PL

Total Cost for Street: **$231,717.00**

Survey Street	Start Street	End Street	Orientation	Cost
CENTRAL PL	CENTRAL PL	W CENTRAL AVE	E	$11,100.00

CENTRAL PL	FISK CT	CENTRAL PL	E	$29,520.00
CENTRAL PL	JEFFERSON AVE	FISK CT	E	$29,400.00
CENTRAL PL	RIVERVIEW DR	W CENTRAL AVE	W	$41,736.00
CENTRAL PL	W CENTRAL AVE	JEFFERSON AVE	W	$119,961.00

CHABLIS AVE

Total Cost for Street: $118,375.00

Survey Street	Start Street	End Street	Orientation	Cost
CHABLIS AVE	GAMAY AVE	MERLOT AVE	W	$46,750.00
CHABLIS AVE	MERLOT AVE	GAMAY AVE	E	$71,625.00

CHAPIN ST

Total Cost for Street: $677,295.00

Survey Street	Start Street	End Street	Orientation	Cost
CHAPIN ST	E ELLIS ST	POLK AVE	W	$195,075.00
CHAPIN ST	POLK AVE	TAFT DR	W	$283,740.00
CHAPIN ST	TAFT DR	E KENNEDY ST	W	$198,480.00

CHATOM WY

Total Cost for Street: $82,935.00

Survey Street	Start Street	End Street	Orientation	Cost
CHATOM WY	FICKLIN DR	GARY LN	W	$37,140.00
CHATOM WY	GARY LN	TRIVISO AVE	W	$35,775.00
CHATOM WY	TRIVISO AVE	GARY LN	E	$10,020.00

CHERRY ST

Total Cost for Street: $141,799.50

Survey Street	Start Street	End Street	Orientation	Cost
CHERRY ST	KNOX RD	PEACH ST	N	$70,195.50
CHERRY ST	PEACH ST	KNOX ST	S	$71,604.00

CHERRY TREE DR

Total Cost for Street: $373,205.00

Survey Street	Start Street	End Street	Orientation	Cost
CHERRY TREE DR	BERRY DR	GRANADA DR	S	$53,990.00
CHERRY TREE DR	GRANADA DR	TOSCHI DR	N	$30,780.00
CHERRY TREE DR	HAZELNUT DR	PEACH TREE DR	S/E/	$177,470.00
CHERRY TREE DR	LEMON TREE DR	HAZELNUT DR	N	$72,180.00
CHERRY TREE DR	TOSCHI DR	BERRY DR	N	$38,785.00

CHESTNUT AVE

Total Cost for Street: $568,104.00

Survey Street	Start Street	End Street	Orientation	Cost
CHESTNUT AVE	1316 CHESTNUT AVE	1316 CHESTNUT AVE	W	$2,640.00
CHESTNUT AVE	527 MACADAMIA AVE	FILBERT ST	N	$85,560.00
CHESTNUT AVE	ACORN CT	CASHEW CT	S	$76,560.00
CHESTNUT AVE	CASHEW CT	WATT ST	S	$30,480.00
CHESTNUT AVE	CHESTNUT AVE	MACADAMIA AVE	E	$75,975.00
CHESTNUT AVE	FILBERT ST	ACORN CT	S	$30,195.00
CHESTNUT AVE	HICKORY AVE	FILBERT ST	N	$195,714.00
CHESTNUT AVE	WATT ST	HICKORY AVE	S	$70,980.00

CHIANTI AVE

Total Cost for Street: $717,007.50

Survey Street	Start Street	End Street	Orientation	Cost
CHIANTI AVE	3059 MERLOT AVE	3155 CHIANTI AVE	N	$132,240.00
CHIANTI AVE	3169 CHIANTI AVE	S TIMBERLINE DR	N	$48,240.00
CHIANTI AVE	GRENACHE AVE	PETITE AVE	S	$175,045.00
CHIANTI AVE	PETITE AVE	GRENACHE AVE	N	$119,707.50
CHIANTI AVE	S DOUBLE TREE WAY	S WOLFTRAP ST	S	$92,335.00
CHIANTI AVE	S TIMBERLINE DR	S DOUBLE TREE WAY	S	$111,340.00
CHIANTI AVE	S WOLFTRAP ST	3059 MERLOT AVE	N	$38,100.00

CHIANTI CT — Total Cost for Street: $73,575.00

Survey Street	Start Street	End Street	Orientation	Cost
CHIANTI CT	SANTA BONITA ST	SANTA BONITA ST	S/E/	$73,575.00

CITRUS WAY — Total Cost for Street: $71,985.00

Survey Street	Start Street	End Street	Orientation	Cost
CITRUS WAY	SAN DIEGO AVE	SAN JOSE AVE	E	$2,610.00
CITRUS WAY	SAN JOSE AVE	SAN DIEGO AVE	W	$69,375.00

CLAREMONT DR — Total Cost for Street: $57,005.00

Survey Street	Start Street	End Street	Orientation	Cost
CLAREMONT DR	825 CLAREMONT DR	UNIVERSITY AVE	E	$25,140.00
CLAREMONT DR	UNIVERSITY AVE	824 CLAREMONT DR	W	$31,865.00

CLINTON ST — Total Cost for Street: $2,110,702.00

Survey Street	Start Street	End Street	Orientation	Cost
CLINTON ST	1633 CLINTON ST	TOZER ST	N	$83,790.00
CLINTON ST	1633-1901 CLINTON ST	1901 CLINTON ST	N	$135,490.00
CLINTON ST	212 CLINTON ST	S C ST	SE	$62,055.00
CLINTON ST	320 CLINTON ST	S B ST	SE	$25,134.00
CLINTON ST	329 S A ST	S A ST	NW	$13,776.00
CLINTON ST	329 S D ST	S D ST	NW	$73,920.00
CLINTON ST	ELM AVE	409 CLINTON ST	SE	$231,275.00
CLINTON ST	FIG AVE	MANZANA CT	SE	$289,600.00
CLINTON ST	LILLY ST	MAGNOLIA ST	SE	$156,753.00
CLINTON ST	MAGNOLIA ST	MILLVIEW DR	SE	$224,426.00
CLINTON ST	MANZANA CT	ELM AVE	SE	$133,560.00
CLINTON ST	MILLVIEW DR	RAMONA ST	SE	$24,636.00
CLINTON ST	PERCY ST	ELM AVE	NW	$105,375.00
CLINTON ST	RAMONA ST	FIG AVE	SE	$70,104.00
CLINTON ST	S A ST	419 CLINTON ST	NW	$40,520.00
CLINTON ST	S B ST	408 CLINTON ST	SE	$33,180.00
CLINTON ST	S D ST	401 S D ST	SE	$750.00
CLINTON ST	S LAKE ST	403 S LAKE ST	SE	$48,156.00
CLINTON ST	SYCAMORE AVE	VINEYARD AVE	SE	$125,430.00
CLINTON ST	TOZER ST	1601 CLINTON ST	S	$184,812.00
CLINTON ST	VINEYARD AVE	SYCAMORE AVE	N	$47,960.00

CLOUD REST CT — Total Cost for Street: $75,295.00

Survey Street	Start Street	End Street	Orientation	Cost
CLOUD REST CT	MONTEREY ST	MONTEREY ST	N/W/	$75,295.00

COCONUT ST — Total Cost for Street: $32,616.00

Survey Street	Start Street	End Street	Orientation	Cost
COCONUT ST	HACIENDA ST	PERSIMMON ST	N	$16,470.00
COCONUT ST	PERSIMMON ST	HACIENDA ST	S	$16,146.00

COLIMA AVE — Total Cost for Street: $49,565.00

Survey Street	Start Street	End Street	Orientation	Cost
COLIMA AVE	IVY GLEN DR	ORCHARD HILL DR	E	$29,940.00
COLIMA AVE	ORCHARD HILL DR	IVY GLEN DR	W	$19,625.00

COLOMBARD DR — Total Cost for Street: $683,215.50

Survey Street	Start Street	End Street	Orientation	Cost
COLOMBARD DR	1322 COLOMBARD DR	PECAN AVE	W	$123,224.00

COLOMBARD DR	GARY LN	1302 COLOMBARD DR	W	$249,735.00
COLOMBARD DR	MADRID LN	GARY LN	W	$130,080.00
COLOMBARD DR	PECAN AVE	GARY LN	E	$180,176.50

COLUMBIA ST

Total Cost for Street: **$60,219.00**

Survey Street	Start Street	End Street	Orientation	Cost
COLUMBIA ST	708 COLUMBIA ST	RIVERSIDE DR	W	$19,920.00
COLUMBIA ST	716 COLUMBIA ST	708 COLUMBIA ST	W	$32,259.00
COLUMBIA ST	816 COLUMBIA ST	808 COLUMBIA ST	W	$2,820.00
COLUMBIA ST	900 COLUMBIA ST	E LINCOLN AVE	W	$5,220.00

COMMON WAY

Total Cost for Street: **$159,025.00**

Survey Street	Start Street	End Street	Orientation	Cost
COMMON WAY	3248 COMMON WAY	GLENVILLE AVE	S	$29,675.00
COMMON WAY	3326 COMMON WAY	N WESTBERRY BLV	S	$17,880.00
COMMON WAY	GLENVILLE AVE	N WESTBERRY BLV	N	$63,075.00
COMMON WAY	N WESTBERRY BLV	3248 COMMON WAY	S	$26,855.00
COMMON WAY	WESTBERRY BVD	3327 COMMON WAY	N	$21,540.00

CONCORD AVE

Total Cost for Street: **$711,001.50**

Survey Street	Start Street	End Street	Orientation	Cost
CONCORD AVE	1142 CONCORD AVE	GARY LN	W	$87,300.00
CONCORD AVE	GARY LN	HELENA WAY	W	$342,422.50
CONCORD AVE	HELENA WAY	GARY LN	E	$233,579.00
CONCORD AVE	MADRID LN	1134 CONCORD AVE	W	$47,700.00

CONCORD CT

Total Cost for Street: **$119,695.00**

Survey Street	Start Street	End Street	Orientation	Cost
CONCORD CT	1476 CONCORD CT	PECAN AVE	W	$23,580.00
CONCORD CT	PECAN AVE	1476 CONCORD CT	E/N/	$96,115.00

CONDOR DR

Total Cost for Street: **$96,684.00**

Survey Street	Start Street	End Street	Orientation	Cost
CONDOR DR	2558 CONDOR DR	PARKING LOT ENTRANCE	W	$96,684.00

COOLIDGE ST

Total Cost for Street: **$535,605.00**

Survey Street	Start Street	End Street	Orientation	Cost
COOLIDGE ST	1772 COOLIDGE ST	PIERCE LN	W	$49,515.00
COOLIDGE ST	1835 COOLIDGE ST	HOOVER AVE	E	$4,800.00
COOLIDGE ST	EISENHOWER LN	1784 COOLIDGE ST	W	$81,255.00
COOLIDGE ST	HOOVER AVE	TYLER LN	W	$136,650.00
COOLIDGE ST	PIERCE LN	EISENHOWER LN	E	$129,270.00
COOLIDGE ST	TYLER LN	1835 COOLIDGE ST	E	$134,115.00

CORONA DR

Total Cost for Street: **$303,690.00**

Survey Street	Start Street	End Street	Orientation	Cost
CORONA DR	LA COSTA CT	LOMA LINDA LN	E	$106,620.00
CORONA DR	LOMA LINDA LN	VERDE MESA WAY	W	$111,930.00
CORONA DR	VERDE MESA WAY	LA COSTA CT	E	$85,140.00

COSENTINO DR

Total Cost for Street: **$484,485.00**

Survey Street	Start Street	End Street	Orientation	Cost
COSENTINO DR	976 COSENTINO DR	ST. MICHELLE DR	W	$28,800.00
COSENTINO DR	FICKLIN DR	ST JULIEN DR	E	$62,070.00
COSENTINO DR	QUADY LN	976 COSENTINO DR	W	$81,120.00
COSENTINO DR	ST JULIEN DR	ST. MICHELLE DR	E	$70,440.00

COSENTINO DR	ST. MICHELLE DR	FICKLIN DR	W	$156,375.00
COSENTINO DR	ST. MONTELENA DR	QUADY LN	E	$85,680.00

COUNTRY CLUB DR

Total Cost for Street: **$2,034,811.00**

Survey Street	Start Street	End Street	Orientation	Cost
COUNTRY CLUB DR	1341 COUNTRY CLUB DR	1341 COUNTRY CLUB DR	E	$107,040.00
COUNTRY CLUB DR	1410 COUNTRY CLUB DR	W SHERWOOD WAY	W	$266,639.00
COUNTRY CLUB DR	1475 COUNTRY CLUB DR	W CLARK ST	E	$273,688.00
COUNTRY CLUB DR	1520 COUNTRY CLUB DR	W CLARK ST	W	$42,375.00
COUNTRY CLUB DR	1565 COUNTRY CLUB DR	ADELL ST	E	$137,994.00
COUNTRY CLUB DR	1692 ADELL ST	1606 COUNTRY CLUB DR	W	$182,200.00
COUNTRY CLUB DR	1692 COUNTRY CLUB DR	1692 COUNTRY CLUB DR	W	$37,260.00
COUNTRY CLUB DR	SHARON BVD	N GATEWAY DR	W	$106,080.00
COUNTRY CLUB DR	W CLARK ST	1410 COUNTRY CLUB DR	W	$211,335.00
COUNTRY CLUB DR	W CLEVELAND AVE	W SHERWOOD WAY	E	$374,784.00
COUNTRY CLUB DR	W SHERWOOD WAY	SHARON BVD	W	$295,416.00

CREEK DR

Total Cost for Street: **$228,115.00**

Survey Street	Start Street	End Street	Orientation	Cost
CREEK DR	CEDAR CREEK LN	SULTANA DR	W	$49,785.00
CREEK DR	REN WAY	WINTER WAY	E	$46,740.00
CREEK DR	SULTANA DR	CEDAR CREEK LN	E	$68,635.00
CREEK DR	WINTER WAY	REN WAY	W	$62,955.00

CRIMSON WY

Total Cost for Street: **$72,420.00**

Survey Street	Start Street	End Street	Orientation	Cost
CRIMSON WY	SCARLET DR	STOREY RD	W	$32,760.00
CRIMSON WY	STOREY RD	SCARLET DR	E	$39,660.00

CROSS ST

Total Cost for Street: **$197,269.00**

Survey Street	Start Street	End Street	Orientation	Cost
CROSS ST	1012 CROSS ST	1012 CROSS ST	SE	$8,880.00
CROSS ST	1015 CROSS ST	1015 CROSS ST	NW	$820.00
CROSS ST	1019 CROSS ST	1019 CROSS ST	NW	$11,295.00
CROSS ST	1020 CROSS ST	1100 CROSS ST	SE	$49,839.00
CROSS ST	1100 CROSS ST	1112 CROSS ST	SE	$28,545.00
CROSS ST	1101 CROSS ST	1101 CROSS ST	NW	$14,835.00
CROSS ST	828 CROSS ST	828 CROSS ST	SE	$6,180.00
CROSS ST	830 CROSS ST	830 CROSS ST	SE	$3,840.00
CROSS ST	921 CROSS ST	921 CROSS ST	NW	$2,424.00
CROSS ST	933 CROSS ST	929 CROSS ST	NW	$13,635.00
CROSS ST	FIG AVE	1109 CROSS ST	NW	$56,976.00

CROWN TERRACE

Total Cost for Street: **$53,400.00**

Survey Street	Start Street	End Street	Orientation	Cost
CROWN TERRACE	BENT OAK TR	STADIUM RD	S	$26,760.00
CROWN TERRACE	STADIUM RD	BENT OAK TR	N	$26,640.00

CRYSTAL WAY

Total Cost for Street: **$336,951.00**

Survey Street	Start Street	End Street	Orientation	Cost
CRYSTAL WAY	BO TREE LN	GARY LN	W	$67,740.00
CRYSTAL WAY	GARY LN	STRAUSS CT	W	$155,919.00
CRYSTAL WAY	STRAUSS CT	GARY LN	E	$113,292.00

CYPRESS CT — Total Cost for Street: $113,765.00

Survey Street	Start Street	End Street	Orientation	Cost
CYPRESS CT	DRIFTWOOD DR	DRIFTWOOD DR	E/N/	$113,765.00

CYPRESS ST — Total Cost for Street: $410,704.00

Survey Street	Start Street	End Street	Orientation	Cost
CYPRESS ST	107 CYPRESS ST	OLIVE AVE	E	$48,889.00
CYPRESS ST	205 CYPRESS ST	OAK ST	E	$65,736.00
CYPRESS ST	225 CYPRESS ST	213 CYPRESS ST	E	$27,243.00
CYPRESS ST	OAK ST	MAPLE ST	W	$64,770.00
CYPRESS ST	OLIVE AVE	OAK ST	W	$204,066.00

DAVIS ST — Total Cost for Street: $463,968.00

Survey Street	Start Street	End Street	Orientation	Cost
DAVIS ST	1100 DAVIS ST	W CLEVELAND AVE	W	$9,900.00
DAVIS ST	E CLEVELAND AVE	WILSON AVE	W	$222,010.00
DAVIS ST	E LINCOLN AVE	133 DAVIS ST	E	$8,760.00
DAVIS ST	W SHERWOOD WAY	1104 DAVIS ST	W	$110,516.00
DAVIS ST	WILSON AVE	200 DAVIS ST	W	$112,782.00

DE ANN COVE — Total Cost for Street: $91,275.00

Survey Street	Start Street	End Street	Orientation	Cost
DE ANN COVE	PAMELA DR	PAMELA DR	E /	$91,275.00

DEBORAH LN — Total Cost for Street: $693,545.00

Survey Street	Start Street	End Street	Orientation	Cost
DEBORAH LN	GRANADA DR	KIMBERLEY LN	W	$217,265.00
DEBORAH LN	KIMBERLEY LN	PAMELA DR	W	$107,205.00
DEBORAH LN	PAMELA DR	GRANADA DR	E	$369,075.00

DEERWOOD CT — Total Cost for Street: $99,210.00

Survey Street	Start Street	End Street	Orientation	Cost
DEERWOOD CT	DEERWOOD DR	DEERWOOD DR	W/S/	$99,210.00

DEERWOOD DR — Total Cost for Street: $200,555.00

Survey Street	Start Street	End Street	Orientation	Cost
DEERWOOD DR	BLUERIDGE DR	STADIUM RD	N	$11,040.00
DEERWOOD DR	DEERWOOD CT	OAKRIDGE DR	S	$69,495.00
DEERWOOD DR	OAKRIDGE DR	BLUERIDGE DR	N	$70,520.00
DEERWOOD DR	SANTA BONITA ST	SANTA BONITA ST	S	$49,500.00

DEL LAGO WAY — Total Cost for Street: $8,490.00

Survey Street	Start Street	End Street	Orientation	Cost
DEL LAGO WAY	KNOX ST	RANCHO MIRAGE RD	S	$5,820.00
DEL LAGO WAY	RANCHO MIRAGE RD	KNOX ST	N	$2,670.00

DELLAVALLE AVE — Total Cost for Street: $182,520.00

Survey Street	Start Street	End Street	Orientation	Cost
DELLAVALLE AVE	E RIVERSIDE DR	W SOUTH ST	E	$101,655.00
DELLAVALLE AVE	W SOUTH ST	E RIVERSIDE DR	W	$80,865.00

DESERT RANCH WAY — Total Cost for Street: $657,125.00

Survey Street	Start Street	End Street	Orientation	Cost
DESERT RANCH WAY	2796 DESERT RANCH WAY	GRANADA DR	S	$133,405.00
DESERT RANCH WAY	GRANADA DR	TOSCHI DRIVE	N	$40,995.00
DESERT RANCH WAY	MAKENNA DR	2816 DESERT RANCH WAY	S	$96,585.00

DESERT RANCH WAY	S DOUBLE TREE WAY	S WOLFTRAP ST	S	$79,200.00
DESERT RANCH WAY	S WOLFTRAP ST	S DOUBLE TREE WAY	N	$115,160.00
DESERT RANCH WAY	TOSCHI DRIVE	MAKENNA DR	N	$191,780.00

DIAMANTE LN

Total Cost for Street: **$44,135.00**

Survey Street	Start Street	End Street	Orientation	Cost
DIAMANTE LN	IVY GLEN DR	ORCHARD HILL DR	E	$44,135.00

DIAMOND WAY

Total Cost for Street: **$438,568.00**

Survey Street	Start Street	End Street	Orientation	Cost
DIAMOND WAY	BO TREE LN	JOYA DR	E	$68,520.00
DIAMOND WAY	GARY LN	STRAUSS CT	W	$162,358.00
DIAMOND WAY	JOYA DR	GARY LN	W	$121,380.00
DIAMOND WAY	STRAUSS CT	GARY LN	E	$86,310.00

DIANE WAY

Total Cost for Street: **$249,350.00**

Survey Street	Start Street	End Street	Orientation	Cost
DIANE WAY	KENT DR	ZAK WAY	S	$118,030.00
DIANE WAY	ZAK WAY	KENT DR	N	$131,320.00

DOME AVE

Total Cost for Street: **$273,780.00**

Survey Street	Start Street	End Street	Orientation	Cost
DOME AVE	BRIDGE WAY	MARIPOSA ST	N	$117,240.00
DOME AVE	MARIPOSA ST	MONARCH RD	S	$76,560.00
DOME AVE	MONARCH RD	BRIDGE WAY	S	$79,980.00

DOMINGUEZ DR

Total Cost for Street: **$356,415.00**

Survey Street	Start Street	End Street	Orientation	Cost
DOMINGUEZ DR	ADANAC WAY	SANARITA WY	W	$80,715.00
DOMINGUEZ DR	LACRETA AVE	SANARITA WY	W	$94,260.00
DOMINGUEZ DR	SANARITA WY	E KENNEDY ST	W	$181,440.00

DON MIGUEL ST

Total Cost for Street: **$80,830.00**

Survey Street	Start Street	End Street	Orientation	Cost
DON MIGUEL ST	14TH ST	OLIVE AVE	SW	$80,830.00

DOUBLE TREE CT

Total Cost for Street: **$53,080.00**

Survey Street	Start Street	End Street	Orientation	Cost
DOUBLE TREE CT	GAMAY AVE	GAMAY AVE	W/S/	$53,080.00

DOUBLE TREE WAY

Total Cost for Street: **$1,686,797.50**

Survey Street	Start Street	End Street	Orientation	Cost
DOUBLE TREE WAY	236 DOUBLETREE WAY	REN WAY	W	$59,400.00
DOUBLE TREE WAY	BOULDER AVE	CASTLE WAY	W	$134,370.00
DOUBLE TREE WAY	CASTLE WAY	SUNSET AVE	W	$55,275.00
DOUBLE TREE WAY	LIBERTY LN	WESTBERRY BVD	S	$150,735.00
DOUBLE TREE WAY	PAINTBRUSH DR	SUBURBAN AVE	N	$127,777.50
DOUBLE TREE WAY	REN WAY	WINTER WAY	E	$69,960.00
DOUBLE TREE WAY	ROSEWOOD CR	BOULDER AVE	E	$115,950.00
DOUBLE TREE WAY	SUBURBAN AVE	BOULDER AVE	SW	$221,445.00
DOUBLE TREE WAY	SUMMER LN	264 DOUBLE TREE WAY	W	$33,285.00
DOUBLE TREE WAY	SUNSET AVE	ROSEWOOD CR	E	$30,450.00
DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	N	$524,170.00
DOUBLE TREE WAY	WESTBERRY BVD	SUBURBAN AVE	S	$96,660.00
DOUBLE TREE WAY	WINTER WAY	SUMMER LN	E	$67,320.00

DRAKE ST — Total Cost for Street: $126,535.00

Survey Street	Start Street	End Street	Orientation	Cost
DRAKE ST	NEPLUS WY	PADRE ST	E	$45,225.00
DRAKE ST	PADRE ST	SAURET ST	W	$50,690.00
DRAKE ST	SAURET ST	NEPLUS WY	E	$30,620.00

DRIFTWOOD DR — Total Cost for Street: $959,065.00

Survey Street	Start Street	End Street	Orientation	Cost
DRIFTWOOD DR	CYPRESS CT	MAINBERRY DR	N	$80,820.00
DRIFTWOOD DR	HARBOR CT	CYPRESS CT	N	$74,520.00
DRIFTWOOD DR	MAINBERRY DR	SHANNON AVE	S	$138,075.00
DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	S	$222,155.00
DRIFTWOOD DR	N GRANADA DR	VALLEY WAY	S	$311,195.00
DRIFTWOOD DR	SHANNON AVE	HARBOR CT	N	$48,360.00
DRIFTWOOD DR	VALLEY WAY	N GRANADA DR	N	$83,940.00

DRYSDALE WAY — Total Cost for Street: $393,715.00

Survey Street	Start Street	End Street	Orientation	Cost
DRYSDALE WAY	KOUFAX DR	PODRES LN	SW	$118,580.00
DRYSDALE WAY	PODRES LN	SUNRISE AVE	SW	$72,840.00
DRYSDALE WAY	SUNRISE AVE	KOUFAX DR	NE	$202,295.00

DUTRA CT — Total Cost for Street: $216,645.00

Survey Street	Start Street	End Street	Orientation	Cost
DUTRA CT	STEPHANIE LN	STEPHANIE LN	N / S	$216,645.00

DUTRA WAY — Total Cost for Street: $614,440.00

Survey Street	Start Street	End Street	Orientation	Cost
DUTRA WAY	ARBELLA LN	STEPHANIE LN	N	$281,320.00
DUTRA WAY	N SCHNOOR AVE	ARBELLA LN	N	$33,720.00
DUTRA WAY	STEPHANIE LN	N SCHNOOR AVE	S	$299,400.00

DWYER AVE — Total Cost for Street: $297,620.00

Survey Street	Start Street	End Street	Orientation	Cost
DWYER AVE	HOWARD RD	120 DWYER AVE	W	$24,640.00
DWYER AVE	MODOC ST	178 DWYER AVE	W	$59,530.00
DWYER AVE	PLUMAS ST	HOWARD RD	E	$213,450.00

E ADELL ST — Total Cost for Street: $406,602.50

Survey Street	Start Street	End Street	Orientation	Cost
E ADELL ST	MERCED ST	N LAKE ST	N	$169,960.00
E ADELL ST	N LAKE ST	MERCED ST	S	$236,642.50

E ALMOND AVE — Total Cost for Street: $346,285.00

Survey Street	Start Street	End Street	Orientation	Cost
E ALMOND AVE	BLUEBERRY LN	PEAR ST	N	$55,440.00
E ALMOND AVE	KIWI ST	RD 28	S	$5,520.00
E ALMOND AVE	KNOX RD	PAPAYA ST	S	$73,140.00
E ALMOND AVE	PAPAYA ST	PEAR ST	S	$19,560.00
E ALMOND AVE	PEAR ST	KIWI ST	S	$187,705.00
E ALMOND AVE	TOZER ST	KIWI ST	N	$4,920.00

E CENTRAL AVE — Total Cost for Street: $121,239.00

Survey Street	Start Street	End Street	Orientation	Cost
E CENTRAL AVE	101 E CENTRAL AVE	105 E CENTRAL AVE	N	$108,024.00

E CENTRAL AVE	E 2ND ST	320 E CENTRAL AVE	S	$13,215.00
E CENTRAL AVE	N D ST	133 E CENTRAL AVE	N	$0.00

E CLARK ST

Total Cost for Street: **$538,504.00**

Survey Street	Start Street	End Street	Orientation	Cost
E CLARK ST	1030 E CLARK ST	1030 E CLARK ST	S	$12,432.00
E CLARK ST	1116 E CLARK ST	1116 E CLARK ST	S	$10,290.00
E CLARK ST	1128 E CLARK ST	TULARE ST	S	$39,015.00
E CLARK ST	AUSTIN AVE	513 ASHLAN WAY	N	$70,744.00
E CLARK ST	N D ST	AUSTIN AVE	S	$120,640.00
E CLARK ST	N LAKE ST	400 CLARK ST	S	$12,465.00
E CLARK ST	TULARE ST	N LAKE ST	N	$272,918.00

E CLEVELAND AVE

Total Cost for Street: **$5,642,529.75**

Survey Street	Start Street	End Street	Orientation	Cost
E CLEVELAND AVE	1218 E CLEVELAND AVE	RAYMOND RD	S	$975,480.00
E CLEVELAND AVE	1491 E YOSEMITE AVE	E YOSEMITE AVE	S/W	$149,415.00
E CLEVELAND AVE	1501 E YOSEMITE AVE	RAYMOND RD	E/N	$140,900.00
E CLEVELAND AVE	1725 E CLEVELAND AVE	MALTA AVE	N	$179,650.00
E CLEVELAND AVE	AUSTIN AVE	CUTTING ST	S	$171,133.50
E CLEVELAND AVE	BLOKER ST	N LAKE ST	S	$49,800.00
E CLEVELAND AVE	CALIMYRNA AVE	KADOTA AVE	N	$73,020.00
E CLEVELAND AVE	CELESTE CT	CALIMYRNA AVE	N	$75,780.00
E CLEVELAND AVE	COLUMBIA ST	SIERRA ST	S	$177,520.00
E CLEVELAND AVE	CUTTING ST	BLOKER ST	S	$105,580.00
E CLEVELAND AVE	DAVIS ST	SONORA ST	S	$198,920.00
E CLEVELAND AVE	DELLAVALLE AVE	AUSTIN AVE	S	$96,982.00
E CLEVELAND AVE	FRESNO ST	N LAKE ST	W	$188,768.00
E CLEVELAND AVE	KADOTA AVE	TULARE ST	N	$104,655.00
E CLEVELAND AVE	MALTA AVE	CELESTE CT	N	$56,295.00
E CLEVELAND AVE	MERCED ST	TULARE ST	S	$172,071.00
E CLEVELAND AVE	N D ST	NEBRASKA AVE	S	$236,580.00
E CLEVELAND AVE	N LAKE ST	FRESNO ST	S	$404,040.00
E CLEVELAND AVE	NEBRASKA AVE	DELLAVALLE AVE	S	$184,160.00
E CLEVELAND AVE	OWENS ST	DAVIS ST	S	$654,735.00
E CLEVELAND AVE	PHILIP ST	DAVIS ST	N	$71,880.00
E CLEVELAND AVE	RAILROAD TRACKS	SHARON BVD	SW	$293,664.00
E CLEVELAND AVE	ROGERS ST	FRESNO ST	N	$51,852.00
E CLEVELAND AVE	SHARON BVD	OWENS ST	S	$207,260.00
E CLEVELAND AVE	SIERRA ST	N D ST	S	$152,428.00
E CLEVELAND AVE	SONORA ST	COLUMBIA ST	S	$119,640.00
E CLEVELAND AVE	TORONADO DR	OWENS ST	N	$82,260.00
E CLEVELAND AVE	TULARE ST	MERCED ST	W	$268,061.25

E ELLIS ST

Total Cost for Street: **$1,411,821.50**

Survey Street	Start Street	End Street	Orientation	Cost
E ELLIS ST	1505 E ELLIS ST	1505 E ELLIS ST	N	$63,450.00
E ELLIS ST	1995 N LAKE ST	EAGLE DR	S	$28,350.00
E ELLIS ST	2001 N LAKE ST	N LAKE ST	N	$4,074.00
E ELLIS ST	27411 E ELLIS ST	1505 E ELLIS ST	N	$75,940.00
E ELLIS ST	ADAMS AVE	CHAPIN ST	S	$175,080.00
E ELLIS ST	EAGLE DR	1141 E ELLIS ST	S	$100,170.00
E ELLIS ST	ERICHO DR	1505 E ELLIS ST	N	$102,750.00

E ELLIS ST	MERCED ST	TALISE AVE	S	$234,495.00
E ELLIS ST	N LAKE ST	1995 E ELLIS ST	S	$105,000.00
E ELLIS ST	TALISE AVE	ZAPATA ST	S	$152,625.00
E ELLIS ST	ZAPATA ST	ADAMS AVE	S	$369,887.50

E KENNEDY ST

Total Cost for Street: $1,441,834.00

Survey Street	Start Street	End Street	Orientation	Cost
E KENNEDY ST	ADAMS AVE	JERICHO DR	N	$332,655.00
E KENNEDY ST	CHAPIN ST	ADAMS AVE	N	$199,140.00
E KENNEDY ST	JERICHO DR	JESSE DR	N	$358,110.00
E KENNEDY ST	JESSE DR	MERCED ST	N	$73,235.00
E KENNEDY ST	MERCED ST	N LAKE ST	N	$161,579.00
E KENNEDY ST	N LAKE ST	TULARE ST	S	$317,115.00

E LINCOLN AVE

Total Cost for Street: $2,405,313.00

Survey Street	Start Street	End Street	Orientation	Cost
E LINCOLN AVE	1119 E LINCOLN AVE	MERCED ST	N	$90,698.00
E LINCOLN AVE	924 E LINCOLN AVE	FRESNO ST	S	$28,179.00
E LINCOLN AVE	AUSTIN AVE	CUTTING ST	S	$179,135.00
E LINCOLN AVE	BLOKER ST	N LAKE ST	S	$136,620.00
E LINCOLN AVE	COLUMBIA ST	E SOUTH ST	S	$158,724.00
E LINCOLN AVE	CUTTING ST	BLOKER ST	S	$131,604.00
E LINCOLN AVE	DAVIS ST	SHARON BVD	N	$126,105.00
E LINCOLN AVE	DELLAVALLE AVE	NEBRASKA ST	N	$85,525.00
E LINCOLN AVE	E SOUTH ST	N D ST	S	$82,800.00
E LINCOLN AVE	FRESNO ST	1000 E LINCOLN AVE	S	$6,885.00
E LINCOLN AVE	MERCED ST	TULARE ST	S	$113,114.00
E LINCOLN AVE	N D ST	AUSTIN AVE	S	$414,735.00
E LINCOLN AVE	N LAKE ST	BLOKER ST	N	$43,575.00
E LINCOLN AVE	NEBRASKA ST	N D ST	N	$81,900.00
E LINCOLN AVE	SHARON BVD	DAVIS ST	S	$165,210.00
E LINCOLN AVE	SIERRA ST	COLUMBIA ST	N	$93,834.00
E LINCOLN AVE	SONORA ST	COLUMBIA ST	S	$374,345.00
E LINCOLN AVE	TORRES WAY	SONORA ST	S	$58,470.00
E LINCOLN AVE	TULARE ST	1125 E LINCOLN AVE	N	$33,855.00

E RIVERSIDE DR

Total Cost for Street: $2,455,937.00

Survey Street	Start Street	End Street	Orientation	Cost
E RIVERSIDE DR	1117 E RIVERSIDE DR	MERCED ST	N	$35,595.00
E RIVERSIDE DR	910 E RIVERSIDE DR	912 E RIVERSIDE DR	S	$8,820.00
E RIVERSIDE DR	AUSTIN AVE	DELLAVALLE AVE	N	$97,590.00
E RIVERSIDE DR	DELLAVALLE AVE	NEBRASKA AVE	N	$66,685.00
E RIVERSIDE DR	FRESNO ST	RIVERSIDE CT	S	$69,195.00
E RIVERSIDE DR	MERCED ST	FRESNO ST	N	$124,560.00
E RIVERSIDE DR	N D ST	N LAKE ST	S	$1,626,012.00
E RIVERSIDE DR	N LAKE ST	AUSTIN AVE	N	$231,265.00
E RIVERSIDE DR	NEBRASKA AVE	N D ST	N	$113,160.00
E RIVERSIDE DR	RIVERSIDE CT	1117 E RIVERSIDE DR	S	$83,055.00

E RUSH ST

Total Cost for Street: $80,358.00

Survey Street	Start Street	End Street	Orientation	Cost
E RUSH ST	101 E RUSH ST	SONORA ST	N	$38,718.00
E RUSH ST	SONORA ST	TORRES WAY	N	$41,640.00

E SHERWOOD WAY — Total Cost for Street: $676,730.00

Survey Street	Start Street	End Street	Orientation	Cost
E SHERWOOD WAY	1416 SHERWOOD WAY	FOUNTAIN WAY	S	$78,720.00
E SHERWOOD WAY	FOUNTAIN WAY	TULARE ST	N	$333,575.00
E SHERWOOD WAY	TULARE ST	1412 SHERWOOD WAY	S	$264,435.00

EAGLE DR — Total Cost for Street: $178,415.00

Survey Street	Start Street	End Street	Orientation	Cost
EAGLE DR	1901 EAGLE DR	E ELLIS ST	E	$103,190.00
EAGLE DR	E ELLIS ST	1901 EAGLE DR	W	$75,225.00

EAGLE WAY — Total Cost for Street: $163,275.00

Survey Street	Start Street	End Street	Orientation	Cost
EAGLE WAY	MAKENNA DR	ST TROPEZ DR	S	$97,740.00
EAGLE WAY	ST TROPEZ DR	MAKENNA DR	N	$65,535.00

EASY CT — Total Cost for Street: $31,460.00

Survey Street	Start Street	End Street	Orientation	Cost
EASY CT	PAINTBRUSH DR	PAINTBRUSH DR	S / N	$31,460.00

EIGHTH ST — Total Cost for Street: $224,005.00

Survey Street	Start Street	End Street	Orientation	Cost
EIGHTH ST	118 EIGHTH ST	S G ST	NW	$37,080.00
EIGHTH ST	327 S H ST	S H ST	NW	$32,610.00
EIGHTH ST	S G ST	S GATEWAY DR	SE	$95,410.00
EIGHTH ST	S H ST	S G ST	SE	$58,905.00

EISENHOWER LN — Total Cost for Street: $403,200.00

Survey Street	Start Street	End Street	Orientation	Cost
EISENHOWER LN	ADAMS AVE	MADISON DR	N	$96,780.00
EISENHOWER LN	COOLIDGE ST	TRUMAN DR	S	$78,075.00
EISENHOWER LN	MADISON DR	MONROE AVE	S	$76,635.00
EISENHOWER LN	MONROE AVE	COOLIDGE ST	S	$66,495.00
EISENHOWER LN	TRUMAN DR	ADAMS AVE	N	$85,215.00

EL MONTE AVE — Total Cost for Street: $115,089.00

Survey Street	Start Street	End Street	Orientation	Cost
EL MONTE AVE	811 EL MONTE AVE	823 EL MONTE AVE	N	$21,495.00
EL MONTE AVE	FAIR OAK AVE	STADIUM RD	S	$93,594.00

EL MONTE CT — Total Cost for Street: $127,944.00

Survey Street	Start Street	End Street	Orientation	Cost
EL MONTE CT	MONTEREY ST	314 EL MONTE CT	S	$127,944.00

EL MONTE ST — Total Cost for Street: $216,100.00

Survey Street	Start Street	End Street	Orientation	Cost
EL MONTE ST	SANTA BONITA ST	SANTA CRUZ ST	N	$60,000.00
EL MONTE ST	SANTA CLARA ST	SANTA BONITA ST	S	$118,860.00
EL MONTE ST	SANTA CRUZ ST	SANTA CLARA ST	N	$37,240.00

ELLIS ST — Total Cost for Street: $1,625,455.00

Survey Street	Start Street	End Street	Orientation	Cost
ELLIS ST	16404 KROHN ST	OVERPASS	NW	$281,230.00
ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	SE	$594,345.00
ELLIS ST	KENNEDY ST	OVERPASS	SE	$225,750.00
ELLIS ST	OVERPASS	KENNEDY ST	NW	$524,130.00

ELM AVE — Total Cost for Street: $950,067.00

Survey Street	Start Street	End Street	Orientation	Cost
ELM AVE	112 ELM AVE	SANTA FE CT	SW	$116,159.00
ELM AVE	1406 E YOSEMITE AVE	E YOSEMITE AVE	NE	$87,024.00
ELM AVE	1426 E YOSEMITE AVE	1426 E YOSEMITE AVE	NE	$171,234.00
ELM AVE	308 ELM AVE	324 308 ELM AVE	SW	$16,560.00
ELM AVE	324 ELM AVE	CLINTON ST	SW	$87,510.00
ELM AVE	448 ELM AVE	CLINTON ST	NE	$157,710.00
ELM AVE	CLINTON ST	448 ELM AVE	SW	$219,220.00
ELM AVE	SANTA FE CT	308 ELM AVE	SW	$62,295.00
ELM AVE	SANTA FE ST	221 ELM AVE	NE	$32,355.00

EMERALD WY — Total Cost for Street: $63,720.00

Survey Street	Start Street	End Street	Orientation	Cost
EMERALD WY	SCARLET DR	STOREY RD	W	$34,020.00
EMERALD WY	STOREY RD	SCARLET DR	E	$29,700.00

EMILY WAY — Total Cost for Street: $676,975.00

Survey Street	Start Street	End Street	Orientation	Cost
EMILY WAY	995 EMILY WAY	ALMOND AVE	E	$150,385.00
EMILY WAY	ALMOND AVE	JOYA DR	W	$234,090.00
EMILY WAY	BO TREE LN	GARY LN	W	$100,560.00
EMILY WAY	JOYA DR	BO TREE LN	W	$72,780.00
EMILY WAY	STREET END	ALMOND AVE	W	$119,160.00

EXPRESS CT — Total Cost for Street: $74,625.00

Survey Street	Start Street	End Street	Orientation	Cost
EXPRESS CT	GLADE AVE	GLADE AVE	S / N	$74,625.00

FAIR OAK AVE — Total Cost for Street: $136,675.00

Survey Street	Start Street	End Street	Orientation	Cost
FAIR OAK AVE	EL MONTE AVE	GAMAY AVE	W	$91,035.00
FAIR OAK AVE	GAMAY AVE	EL MONTE AVE	E	$45,640.00

FAIRFIELD WAY — Total Cost for Street: $820,310.00

Survey Street	Start Street	End Street	Orientation	Cost
FAIRFIELD WAY	CURB RAMP	N WESTBERRY BLV	S	$96,360.00
FAIRFIELD WAY	HILLSBORO AVE	PENNY WAY	N	$196,235.00
FAIRFIELD WAY	KENTON WAY	HILLSBORO AVE	S	$96,840.00
FAIRFIELD WAY	LARRETE AVE	N WESTBERRY BLV	N	$44,460.00
FAIRFIELD WAY	N WESTBERRY BLV	TIBURON WAY	S	$150,210.00
FAIRFIELD WAY	PENNY WAY	LARRETE AVE	N	$94,680.00
FAIRFIELD WAY	SAN PIETRO DR	CURB RAMP	S	$62,805.00
FAIRFIELD WAY	TIBURON WAY	KENTON WAY	S	$78,720.00

FAIRMONT CT — Total Cost for Street: $70,722.50

Survey Street	Start Street	End Street	Orientation	Cost
FAIRMONT CT	PAINTBRUSH DR	PAINTBRUSH DR	S / N	$70,722.50

FAIRVIEW AVE — Total Cost for Street: $158,724.00

Survey Street	Start Street	End Street	Orientation	Cost
FAIRVIEW AVE	1518 FIFTH ST	FIFTH ST	E	$37,074.00
FAIRVIEW AVE	1520 FOURTH ST	FOURTH ST	E	$27,246.00
FAIRVIEW AVE	1601 FIFTH ST	FIFTH ST	W	$19,440.00
FAIRVIEW AVE	1603 HOWARD RD	HOWARD RD	W	$21,630.00

FAIRVIEW AVE	FIFTH ST	1520 FAIRVIEW AVE	E	$22,014.00
FAIRVIEW AVE	FOURTH ST	1600 FAIRVIEW AVE	W	$31,320.00

FAIRWAY AVE

Total Cost for Street: **$919,572.00**

Survey Street	Start Street	End Street	Orientation	Cost
FAIRWAY AVE	CURB RAMP	N WESTBERRY BLV	S	$81,360.00
FAIRWAY AVE	FARIWAY AVE	CAMINO LN	S	$75,075.00
FAIRWAY AVE	HILLSBORO AVE	N WESTBERRY BLV	N	$283,320.00
FAIRWAY AVE	LARRETE AVE	PENNY WAY	S	$97,455.00
FAIRWAY AVE	MANDANA WAY	HILLSBORO AVE	S	$79,800.00
FAIRWAY AVE	N WESTBERRY BLV	LARRETE AVE	S	$37,455.00
FAIRWAY AVE	PENNY WAY	MANDANA WAY	S	$107,400.00
FAIRWAY AVE	WESTBERRY BVD	3356 FAIRWAY AVE	N	$157,707.00

FICKLIN DR

Total Cost for Street: **$236,725.00**

Survey Street	Start Street	End Street	Orientation	Cost
FICKLIN DR	CHATOM WY	GOOSECROSS DR	S	$34,190.00
FICKLIN DR	COSENTINO DR	CHATOM WY	S	$72,125.00
FICKLIN DR	GOOSECROSS DR	COSENTINO DR	N	$130,410.00

FIESTA DR

Total Cost for Street: **$68,445.00**

Survey Street	Start Street	End Street	Orientation	Cost
FIESTA DR	944 FIESTA DR	CAITLAN DR	S	$28,770.00
FIESTA DR	CAITLAN DR	970 FIESTA DR	N	$39,675.00

FIFTH ST

Total Cost for Street: **$390,344.50**

Survey Street	Start Street	End Street	Orientation	Cost
FIFTH ST	1415 FIFTH ST	ROTAN AVE	N	$41,952.00
FIFTH ST	1608 FIFTH ST	1604 FIFTH ST	S	$2,772.00
FIFTH ST	1711 FIFTH ST	WILLIAMS AVE	N	$27,982.50
FIFTH ST	FAIRVIEW AVE	ROTAN AVE	S	$60,412.00
FIFTH ST	N G ST	N GATEWAY DR	SE	$75,690.00
FIFTH ST	N GATEWAY DR	N G ST	NW	$77,385.00
FIFTH ST	ROTAN AVE	1404 FIFTH ST	S	$104,151.00

FIG AVE

Total Cost for Street: **$327,418.00**

Survey Street	Start Street	End Street	Orientation	Cost
FIG AVE	116 FIG AVE	CROSS ST	SW	$37,440.00
FIG AVE	123 FIG AVE	117 FIG AVE	NE	$4,500.00
FIG AVE	311 FIG AVE	301 FIG AVE	NE	$40,080.00
FIG AVE	312 FIG AVE	330 FIG AVE	SW	$3,075.00
FIG AVE	321 FIG AVE	129 FIG AVE	NE	$15,390.00
FIG AVE	325 FIG AVE	325 FIG AVE	NE	$5,580.00
FIG AVE	326 FIG AVE	326 FIG AVE	SW	$11,472.00
FIG AVE	410 FIG AVE	410 FIG AVE	SW	$8,418.00
FIG AVE	420 FIG AVE	441 FIG AVE	SW	$73,350.00
FIG AVE	431 FIG AVE	AVILA WAY	NE	$11,880.00
FIG AVE	441 FIG AVE	431 FIG AVE	NE	$16,035.00
FIG AVE	AVILA WAY	CLINTON ST	NE	$82,110.00
FIG AVE	CLINTON ST	406 FIG AVE	SW	$18,088.00

FILBERT ST

Total Cost for Street: **$41,810.00**

Survey Street	Start Street	End Street	Orientation	Cost
FILBERT ST	1336 FILBERT ST	1386 FILBERT ST	W	$31,535.00
FILBERT ST	1402 FILBERT ST	CHESTNUT AVE	W	$10,275.00

FILLMORE AVE — Total Cost for Street: $451,755.00

Survey Street	Start Street	End Street	Orientation	Cost
FILLMORE AVE	IMPERIAL DR	IMPERIAL DR	S/E/	$117,305.00
FILLMORE AVE	N SCHNOOR AVE	ORCHARD AVE	S	$162,770.00
FILLMORE AVE	ORCHARD AVE	N SCHNOOR AVE	N	$171,680.00

FISK CT — Total Cost for Street: $56,885.00

Survey Street	Start Street	End Street	Orientation	Cost
FISK CT	CENTRAL PL	CENTRAL PL	S/E/	$56,885.00

FLUME ST — Total Cost for Street: $376,675.00

Survey Street	Start Street	End Street	Orientation	Cost
FLUME ST	4TH ST	5TH ST	SW	$49,050.00
FLUME ST	5TH ST	W YOSEMITE AVE	SW	$103,970.00
FLUME ST	701 E 5TH ST	4TH ST	NE	$51,060.00
FLUME ST	E YOSEMITE AVE	5TH ST	NE	$125,265.00
FLUME ST	STREET END	4TH ST	SW	$47,330.00

FOREST CT — Total Cost for Street: $102,680.00

Survey Street	Start Street	End Street	Orientation	Cost
FOREST CT	WOODLANDS DR	WOODLANDS DR	N/W/	$102,680.00

FOREST LN — Total Cost for Street: $197,460.00

Survey Street	Start Street	End Street	Orientation	Cost
FOREST LN	CEDAR CREEK LN	WOODLANDS DR	N	$92,220.00
FOREST LN	WOODLANDS DR	3014 FOREST LN	S	$105,240.00

FORUM WAY — Total Cost for Street: $166,930.00

Survey Street	Start Street	End Street	Orientation	Cost
FORUM WAY	3320 FORUM WAY	N WESTBERRY BLV	S	$19,320.00
FORUM WAY	GLENVILLE AVE	N WESTBERRY BLV	N	$65,595.00
FORUM WAY	N WESTBERRY BLV	GLENVILLE AVE	S	$59,395.00
FORUM WAY	WESTBERRY BVD	3325 FORUM WAY	N	$22,620.00

FOUNTAIN WAY — Total Cost for Street: $307,201.00

Survey Street	Start Street	End Street	Orientation	Cost
FOUNTAIN WAY	E SHERWOOD WAY	WESSMITH WAY	E	$58,591.00
FOUNTAIN WAY	ROBINWOOD WAY	WRENWOOD WAY	W	$24,534.00
FOUNTAIN WAY	WESSMITH WAY	E SHERWOOD WAY	W	$172,536.00
FOUNTAIN WAY	WRENWOOD WAY	WESSMITH WAY	W	$51,540.00

FOURTH ST — Total Cost for Street: $1,208,997.00

Survey Street	Start Street	End Street	Orientation	Cost
FOURTH ST	1417 FOURTH ST	ROTAN AVE	N	$20,091.00
FOURTH ST	1612 FOURTH ST	FAIRVIEW AVE	S	$16,416.00
FOURTH ST	FAIRVIEW AVE	ROTAN AVE	S	$48,015.00
FOURTH ST	N I ST	SUNSET AVE	NW	$72,945.00
FOURTH ST	N J ST	N I ST	SE	$81,640.00
FOURTH ST	N K ST	N J ST	NE	$53,120.00
FOURTH ST	N L ST	N K ST	SE	$83,475.00
FOURTH ST	N M ST	N L ST	SE	$136,805.00
FOURTH ST	N N ST	N M ST	SE	$125,060.00
FOURTH ST	N O ST	N Q ST	NW	$280,045.00
FOURTH ST	N P ST	N O ST	SE	$105,495.00
FOURTH ST	N Q ST	N P ST	SE	$66,855.00

FOURTH ST	SUNSET AVE	N L ST	NW	$119,035.00

FOXGLOVE WAY — Total Cost for Street: $733,447.00

Survey Street	Start Street	End Street	Orientation	Cost
FOXGLOVE WAY	2105 N SCHNOOR AVE	N SCHNOOR AVE	N	$88,815.00
FOXGLOVE WAY	ASPEN LN	IRONWOOD WAY	S	$338,050.00
FOXGLOVE WAY	IRONWOOD WAY	N SCHNOOR AVE	S	$70,170.00
FOXGLOVE WAY	N SCHNOOR AVE	FOXGLOVE WAY	S	$90,747.00
FOXGLOVE WAY	SUNDANCE LN	ASPEN LN	S	$145,665.00

FREDERICK CT — Total Cost for Street: $151,410.00

Survey Street	Start Street	End Street	Orientation	Cost
FREDERICK CT	STEPHANIE LN	STEPHANIE LN	N / S	$151,410.00

FREDERICK WAY — Total Cost for Street: $407,790.00

Survey Street	Start Street	End Street	Orientation	Cost
FREDERICK WAY	ARBELLA LN	STEPHANIE LN	N	$194,550.00
FREDERICK WAY	STEPHANIE LN	ARBELLA LN	S	$213,240.00

FRESHET DR — Total Cost for Street: $73,647.50

Survey Street	Start Street	End Street	Orientation	Cost
FRESHET DR	SAN PIETRO DR	SHORESIDE DR	N	$44,130.00
FRESHET DR	SHORESIDE DR	SAN PIETRO DR	S	$29,517.50

FRESNO ST — Total Cost for Street: $60,495.00

Survey Street	Start Street	End Street	Orientation	Cost
FRESNO ST	717 FRESNO ST	E RIVERSIDE DR	E	$14,295.00
FRESNO ST	785 FRESNO ST	801 FRESNO ST	E	$3,780.00
FRESNO ST	E RIVERSIDE DR	925 FRESNO ST	W	$42,420.00

FRITZ ST — Total Cost for Street: $111,495.00

Survey Street	Start Street	End Street	Orientation	Cost
FRITZ ST	CARMEL ST	MILOW ST	W	$72,480.00
FRITZ ST	MILOW ST	CARMEL ST	E	$39,015.00

GABRIEL WAY — Total Cost for Street: $95,915.00

Survey Street	Start Street	End Street	Orientation	Cost
GABRIEL WAY	LUCIA WAY	POPOLI WAY	S	$67,480.00
GABRIEL WAY	POPOLI WAY	LUCIA WAY	N	$28,435.00

GAMAY AVE — Total Cost for Street: $911,250.00

Survey Street	Start Street	End Street	Orientation	Cost
GAMAY AVE	BARBERA AVE	PETITE AVE	S	$41,775.00
GAMAY AVE	CHABLIS AVE	BARBERA AVE	S	$82,650.00
GAMAY AVE	DOUBLE TREE CT	S WOLFTRAP ST	S	$65,985.00
GAMAY AVE	FAIR OAK AVE	STADIUM RD	S	$70,855.00
GAMAY AVE	GRENACHE AVE	CHABLIS AVE	S	$40,560.00
GAMAY AVE	PETITE AVE	GRENACHE AVE	S/E/	$225,420.00
GAMAY AVE	S DOUBLE TREE WAY	S TIMBERLINE DR	N	$59,035.00
GAMAY AVE	S TIMBERLINE DR	DOUBLE TREE CT	S	$133,795.00
GAMAY AVE	S WOLFTRAP ST	S DOUBLE TREE WAY	N	$36,300.00
GAMAY AVE	STADIUM RD	FAIR OAK AVE	N	$93,720.00
GAMAY AVE	WESTBERRY BVD	S TIMBERLINE DR	S	$61,155.00

GAMAY ST — Total Cost for Street: $452,715.00

Survey Street	Start Street	End Street	Orientation	Cost

GAMAY ST	602 GAMAY ST	SANTA BONITA ST	S	$75,260.00
GAMAY ST	BLUERIDGE DR	STADIUM RD	N	$35,700.00
GAMAY ST	SANTA BONITA ST	SANTA CLARA ST	N	$108,640.00
GAMAY ST	SANTA CLARA ST	BLUERIDGE DR	N	$84,180.00
GAMAY ST	STADIUM RD	608 GAMAY ST	S	$148,935.00

GARFIELD AVE

Total Cost for Street: **$21,200.00**

Survey Street	Start Street	End Street	Orientation	Cost
GARFIELD AVE	913 GARFIELD AVE	907 GARFIELD AVE	N	$21,200.00

GARY LN

Total Cost for Street: **$2,222,927.00**

Survey Street	Start Street	End Street	Orientation	Cost
GARY LN	101 GARY LN	101 GARY LN	N	$1,935.00
GARY LN	1105 MADERA AVE	MADERA AVE	N	$128,775.00
GARY LN	1200 MADERA AVE	MADERA AVE	S	$61,500.00
GARY LN	CHATOM WY	MONTEREY ST	S	$279,900.00
GARY LN	COLOMBARD DR	1201 COLOMBARD DR	S	$93,630.00
GARY LN	CONCORD AVE	SENECA DR	S	$143,895.00
GARY LN	CRYSTAL WAY	STREET END	S	$317,142.00
GARY LN	DIAMOND WAY	MAJESTIC CT	S	$83,182.50
GARY LN	EMILY WAY	CRYSTAL WAY	N	$21,000.00
GARY LN	MADERA AVE	DIAMOND WAY	S	$484,175.00
GARY LN	MAJESTIC CT	CRYSTAL WAY	S	$54,067.50
GARY LN	MAJESTIC WAY	DIAMOND WAY	N	$83,280.00
GARY LN	MONTEREY DR	CONCORD AVE	S	$84,015.00
GARY LN	MONTEREY ST	CHATOM WY	N	$187,575.00
GARY LN	SENECA AVE	CONCORD AVE	N	$52,260.00
GARY LN	SENECA DR	COLOMBARD DR	S	$75,600.00
GARY LN	STADIUM RD	CHATOM WY	S	$70,995.00

GATEWAY DR

Total Cost for Street: **$1,894,217.00**

Survey Street	Start Street	End Street	Orientation	Cost
GATEWAY DR	1200 GATEWAY DR	1200 GATEWAY DR	SW	$20,580.00
GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	W	$806,835.00
GATEWAY DR	900 GATEWAY DR	900 GATEWAY DR	W	$288,408.00
GATEWAY DR	920 GATEWAY DR	920 GATEWAY DR	W	$222,360.00
GATEWAY DR	E CLEVELAND AVE	920 GATEWAY DR	W	$226,440.00
GATEWAY DR	OLIVE AVE	PARKING LOT ENTRANCE	SW	$107,240.00
GATEWAY DR	W CENTRAL AVE	900 GATEWAY DR	W	$222,354.00

GEORGIA AVE

Total Cost for Street: **$342,288.00**

Survey Street	Start Street	End Street	Orientation	Cost
GEORGIA AVE	1051 GEORGIA AVE	LIME AVE	NE	$5,175.00
GEORGIA AVE	1083 GEORGIA AVE	1051 GEORGIA AVE	NE	$46,620.00
GEORGIA AVE	GRAPEFRUIT WAY	LIME AVE	SW	$45,720.00
GEORGIA AVE	LIME AVE	LEMON AVE	SW	$195,030.00
GEORGIA AVE	TANGERINE AVE	GRAPEFRUIT WAY	SW	$49,743.00

GEORGIA CT

Total Cost for Street: **$64,115.00**

Survey Street	Start Street	End Street	Orientation	Cost
GEORGIA CT	936 GEORGIA CT	VALENCIA AVE	SW	$20,535.00
GEORGIA CT	VALENCIA AVE	936 GEORGIA CT	NE	$43,580.00

GILL AVE

Total Cost for Street: **$247,030.00**

Survey Street	Start Street	End Street	Orientation	Cost

GILL AVE	NOBLE ST	PINE ST	N	$247,030.00

GLADE AVE

Total Cost for Street: **$1,080,045.00**

Survey Street	Start Street	End Street	Orientation	Cost
GLADE AVE	ASHBURY CT	HILLSBORO AVE	W	$224,030.00
GLADE AVE	EXPRESS CT	W CLEVELAND AVE	E	$258,000.00
GLADE AVE	HILLSBORO AVE	STEVEN LANE	S	$59,160.00
GLADE AVE	MARIE DR	EXPRESS CT	NE	$353,515.00
GLADE AVE	STEVEN LANE	MARIE DR	S	$150,765.00
GLADE AVE	W CLEVELAND AVE	ASHBURY CT	W	$34,575.00

GLENVILLE AVE

Total Cost for Street: **$861,460.00**

Survey Street	Start Street	End Street	Orientation	Cost
GLENVILLE AVE	1685 GLENVILLE AVE	ASHBURY CT	E	$92,635.00
GLENVILLE AVE	ARIES CT	HILLSBORO AVE	W/S	$207,930.00
GLENVILLE AVE	ASHBURY CT	COMMON WAY	W	$90,060.00
GLENVILLE AVE	COMMON WAY	FORUM WAY	W	$75,150.00
GLENVILLE AVE	FORUM WAY	ARIES CT	W	$82,140.00
GLENVILLE AVE	HILLSBORO AVE	1685 GLENVILLE AVE	N/E	$313,545.00

GOLDEN STATE BLVD

Total Cost for Street: **$46,995.00**

Survey Street	Start Street	End Street	Orientation	Cost
GOLDEN STATE BLVD	AVE 17	3455 GOLDEN STATE BLVD	E	$46,995.00

GOOSECROSS DR

Total Cost for Street: **$503,670.00**

Survey Street	Start Street	End Street	Orientation	Cost
GOOSECROSS DR	1181 GOOSECROSS DR	ST. MONTELENA DR	E	$166,580.00
GOOSECROSS DR	1197 GOOSECROSS DR	1189 GOOSECROSS DR	E	$3,940.00
GOOSECROSS DR	887 GOOSECROSS DR	QUADY LN	E	$23,535.00
GOOSECROSS DR	QUADY LN	ST. MONTELENA DR	W	$75,195.00
GOOSECROSS DR	ST JULIEN DR	FICKLIN DR	W	$62,175.00
GOOSECROSS DR	ST. MICHELLE DR	ST JULIEN DR	W	$73,035.00
GOOSECROSS DR	ST. MONTELENA DR	ST. MICHELLE DR	W	$99,210.00

GRANADA DR

Total Cost for Street: **$1,884,105.00**

Survey Street	Start Street	End Street	Orientation	Cost
GRANADA DR	102190 S GRANADA DR	GRANADA DR	W	$31,575.00
GRANADA DR	1152 HAZELNUT DR	HAZELNUT DR	S	$30,660.00
GRANADA DR	188 S GRANADA DR	PLUMAS ST	W	$30,195.00
GRANADA DR	2592 MITCHELL CT	MITCHELL CT	E	$38,715.00
GRANADA DR	ALMOND AVE	APPLE TREE DR	W	$483,590.00
GRANADA DR	APPLE TREE DR	CHERRY TREE DR	W	$100,260.00
GRANADA DR	CHERRY TREE DR	2600 CHERRY TREE DR	W	$30,300.00
GRANADA DR	DESERT RANCH WAY	MERLOT AVE	W	$253,935.00
GRANADA DR	MERLOT AVE	W ALMOND AVE	W	$214,995.00
GRANADA DR	PARK LN	PARK LN	E	$193,470.00
GRANADA DR	PLUMAS ST	DESERT RANCH WAY	W	$106,515.00
GRANADA DR	PRIVATE	S DOUBLE TREE WAY	N	$210,650.00
GRANADA DR	S DOUBLE TREE WAY	WESTBERRY BVD	N	$141,725.00
GRANADA DR	S GRANADA DR	102190 S GRANADA DR	N	$17,520.00

GRANT AVE

Total Cost for Street: **$19,980.00**

Survey Street	Start Street	End Street	Orientation	Cost
GRANT AVE	1128 GRANT AVE	TULARE ST	S	$11,100.00
GRANT AVE	914 GRANT AVE	914 GRANT AVE	S	$8,880.00

GRAPE ST — Total Cost for Street: $61,933.50

Survey Street	Start Street	End Street	Orientation	Cost
GRAPE ST	1465 GRAPE ST	PAPAYA ST	NW	$32,521.50
GRAPE ST	PAPAYA ST	KIWI ST	S	$29,412.00

GRAPEFRUIT WAY — Total Cost for Street: $186,224.00

Survey Street	Start Street	End Street	Orientation	Cost
GRAPEFRUIT WAY	GEORGIA AVE	TANGERINE AVE	NW	$89,610.00
GRAPEFRUIT WAY	TANGERINE AVE	GEORGIA AVE	SE	$96,614.00

GRAPEWOOD WAY — Total Cost for Street: $461,999.00

Survey Street	Start Street	End Street	Orientation	Cost
GRAPEWOOD WAY	ASPEN LN	ASPEN LN	S / N	$287,134.00
GRAPEWOOD WAY	SUNDANCE LN	ASPEN LN	S	$174,865.00

GREEN WAY — Total Cost for Street: $889,641.00

Survey Street	Start Street	End Street	Orientation	Cost
GREEN WAY	1008 GREEN WAY	ROGERS ST	S	$30,984.00
GREEN WAY	1126 MERCED ST	MERCED ST	S	$21,996.00
GREEN WAY	1201 ROGERS ST	ROGERS ST	N	$16,956.00
GREEN WAY	AUSTIN AVE	N LAKE ST	S	$264,816.00
GREEN WAY	MERCED ST	1202 GREEN WAY	N	$31,008.00
GREEN WAY	N D ST	1205 GREEN WAY	N	$168,465.00
GREEN WAY	N LAKE ST	1125 N LAKE ST	S	$333,948.00
GREEN WAY	ROGERS ST	1125 ROGERS ST	S	$21,468.00

GREENWOOD DR — Total Cost for Street: $458,965.00

Survey Street	Start Street	End Street	Orientation	Cost
GREENWOOD DR	MONOCOTT DR	SANDALWOOD DR	S	$67,170.00
GREENWOOD DR	N GRANADA DR	MONOCOTT DR	NE	$245,310.00
GREENWOOD DR	SANDALWOOD DR	GRANADA DR	SW	$146,485.00

GRENACHE AVE — Total Cost for Street: $275,340.00

Survey Street	Start Street	End Street	Orientation	Cost
GRENACHE AVE	CHIANTI AVE	MERLOT AVE	E	$45,780.00
GRENACHE AVE	GAMAY AVE	CHIANTI AVE	W	$147,467.50
GRENACHE AVE	MERLOT AVE	GAMAY AVE	E	$82,092.50

HACIENDA ST — Total Cost for Street: $323,617.50

Survey Street	Start Street	End Street	Orientation	Cost
HACIENDA ST	APPLE CT	POMEGRANATE ST	W	$45,265.50
HACIENDA ST	APPLE ST	LA QUINTA WAY	E	$69,768.00
HACIENDA ST	COCONUT ST	APPLE ST	E	$98,811.00
HACIENDA ST	LA QUINTA WAY	APPLE ST	W	$50,895.00
HACIENDA ST	POMEGRANATE ST	COCONUT ST	W	$58,878.00

HALF DOME CT — Total Cost for Street: $91,680.00

Survey Street	Start Street	End Street	Orientation	Cost
HALF DOME CT	408 HALF DOME CT	MONTEREY ST	S	$11,760.00
HALF DOME CT	MONTEREY ST	428 HALF DOME CT	N/W/	$79,920.00

HAMPTON DR — Total Cost for Street: $282,938.00

Survey Street	Start Street	End Street	Orientation	Cost
HAMPTON DR	3001 HAMPTON DR	HILLSBORO AVE	S	$50,538.00
HAMPTON DR	3245 HAMPTON DR	3209 HAMPTON DR	S	$9,500.00

HAMPTON DR	HILLSBORO AVE	KENTON WAY	N	$64,680.00
HAMPTON DR	KENTON WAY	TIBURON WAY	N	$46,020.00
HAMPTON DR	TIBURON WAY	3245 HAMPTON DR	N	$112,200.00

HARBOR CT

Total Cost for Street: **$123,645.00**

Survey Street	Start Street	End Street	Orientation	Cost
HARBOR CT	1065 HARBOR CT	DRIFTWOOD DR	N/W	$73,050.00
HARBOR CT	DRIFTWOOD DR	DRIFTWOOD DR	E	$50,595.00

HARBOR DR

Total Cost for Street: **$262,885.00**

Survey Street	Start Street	End Street	Orientation	Cost
HARBOR DR	BAY VIEW DR	LIGHTHOUSE DR	E	$125,560.00
HARBOR DR	LIGHTHOUSE DR	BAY VIEW DR	W	$137,325.00

HARDING AVE

Total Cost for Street: **$7,000.00**

Survey Street	Start Street	End Street	Orientation	Cost
HARDING AVE	OWENS ST	305 WILSON AVE	N	$7,000.00

HARRISON CT

Total Cost for Street: **$144,755.00**

Survey Street	Start Street	End Street	Orientation	Cost
HARRISON CT	973 HARRISON CT	JEFFERSON AVE	E/N/	$83,360.00
HARRISON CT	JEFFERSON AVE	973 HARRISON CT	E	$61,395.00

HARVARD AVE

Total Cost for Street: **$315,465.00**

Survey Street	Start Street	End Street	Orientation	Cost
HARVARD AVE	JEFFERSON AVE	PRINCETON AVE	W	$53,190.00
HARVARD AVE	PRINCETON AVE	UNIVERSITY AVE	W	$45,780.00
HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	E/N/	$216,495.00

HAYES CT

Total Cost for Street: **$92,460.00**

Survey Street	Start Street	End Street	Orientation	Cost
HAYES CT	UNIVERSITY AVE	UNIVERSITY AVE	W/S/	$92,460.00

HAZEL AVE

Total Cost for Street: **$300,240.00**

Survey Street	Start Street	End Street	Orientation	Cost
HAZEL AVE	HAZEL AVE	LEMON AVE	N	$100,725.00
HAZEL AVE	LEMON AVE	RAYMOND THOMAS ST	N	$199,515.00

HAZELNUT DR

Total Cost for Street: **$261,760.00**

Survey Street	Start Street	End Street	Orientation	Cost
HAZELNUT DR	1196 HAZELNUT DR	CHERRY TREE DR	W	$42,060.00
HAZELNUT DR	ALMOND AVE	1190 HAZELNUT DR	W	$182,200.00
HAZELNUT DR	PEAR TREE DR	ALMOND AVE	E	$37,500.00

HAZELNUT LN

Total Cost for Street: **$191,330.00**

Survey Street	Start Street	End Street	Orientation	Cost
HAZELNUT LN	1131 HAZELNUT LN	PEAR TREE DR	E	$56,220.00
HAZELNUT LN	CHERRY TREE LN	1137 HAZELNUT LN	E	$135,110.00

HELENA WAY

Total Cost for Street: **$221,995.00**

Survey Street	Start Street	End Street	Orientation	Cost
HELENA WAY	CONCORD AVE	MONTEREY ST	N	$70,680.00
HELENA WAY	MONTEREY ST	SENECA DR	S	$71,815.00
HELENA WAY	SENECA DR	CONCORD AVE	N	$79,500.00

HICKORY AVE

Total Cost for Street: **$243,495.00**

Survey Street	Start Street	End Street	Orientation	Cost

HICKORY AVE	1460 HICKORY AVE	1498 HICKORY AVE	W	$25,095.00
HICKORY AVE	1498 HICKORY AVE	MACADAMIA AVE	E	$118,260.00
HICKORY AVE	CHESTNUT AVE	1460 HICKORY AVE	W	$31,080.00
HICKORY AVE	MACADAMIA AVE	CHESTNUT AVE	W	$69,060.00

HIGH ST

Total Cost for Street: **$351,480.00**

Survey Street	Start Street	End Street	Orientation	Cost
HIGH ST	5TH ST	E YOSEMITE AVE	SW	$130,477.50
HIGH ST	E YOSEMITE AVE	5TH ST	NE	$92,242.50
HIGH ST	STREET END	5TH ST	SW	$128,760.00

HILLCREST CT

Total Cost for Street: **$232,720.00**

Survey Street	Start Street	End Street	Orientation	Cost
HILLCREST CT	WOODLANDS DR	WOODLANDS DR	S/E/	$232,720.00

HILLSBORO AVE

Total Cost for Street: **$792,234.00**

Survey Street	Start Street	End Street	Orientation	Cost
HILLSBORO AVE	FAIRFIELD WAY	HAMPTON DR	W	$90,204.00
HILLSBORO AVE	FAIRWAY AVE	MATEO WAY	W	$77,055.00
HILLSBORO AVE	GLADE AVE	GLENVILLE AVE	W	$92,235.00
HILLSBORO AVE	GLENVILLE AVE	FAIRWAY AVE	W	$85,800.00
HILLSBORO AVE	HAMPTON DR	FAIRFIELD WAY	E	$116,400.00
HILLSBORO AVE	MATEO WAY	FAIRFIELD WAY	W	$85,800.00
HILLSBORO AVE	PAMELA DR	GLADE AVE	E	$244,740.00

HOLIDAY CT

Total Cost for Street: **$77,925.00**

Survey Street	Start Street	End Street	Orientation	Cost
HOLIDAY CT	VALLEY WAY	VALLEY WAY	S/E/	$77,925.00

HOLLOW AVE

Total Cost for Street: **$276,540.00**

Survey Street	Start Street	End Street	Orientation	Cost
HOLLOW AVE	N WESTBERRY BLV	TIBURON WAY	S	$147,240.00
HOLLOW AVE	TIBURON WAY	N WESTBERRY BLV	N	$129,300.00

HOOVER AVE

Total Cost for Street: **$409,245.00**

Survey Street	Start Street	End Street	Orientation	Cost
HOOVER AVE	1773 HOOVER AVE	MADISON DR	N	$91,350.00
HOOVER AVE	COOLIDGE ST	TRUMAN DR	S	$75,810.00
HOOVER AVE	MADISON DR	MONROE AVE	S	$73,095.00
HOOVER AVE	MONROE AVE	COOLIDGE ST	S	$76,395.00
HOOVER AVE	TRUMAN DR	1847 HOOVER AVE	N	$92,595.00

HOWARD RD

Total Cost for Street: **$1,507,029.50**

Survey Street	Start Street	End Street	Orientation	Cost
HOWARD RD	11 SANTA LUCIA DR	SANTA LUCIA DR	N	$18,210.00
HOWARD RD	1409 HOWARD RD	ROTAN AVE	N	$38,000.00
HOWARD RD	1717 HOWARD RD	WILLIAMS AVE	N	$64,020.00
HOWARD RD	1800 HOWARD RD	FAIRVIEW AVE	S	$138,810.00
HOWARD RD	1919 HOWARD RD	1919 HOWARD RD	N	$20,175.00
HOWARD RD	1933 HOWARD RD	SCHNOOR AVE	N	$94,896.00
HOWARD RD	20 MAKENNA DR	MAKENNA DR	S	$17,655.00
HOWARD RD	3399 HOWARD RD	24341 AVE 14	N	$130,185.00
HOWARD RD	AMERINE AVE	1950 HOWARD RD	N	$59,220.00
HOWARD RD	ASILOMAR DR	24181 AVENUE 14	N	$1,155.00
HOWARD RD	DWYER AVE	1800 HOWARD RD	S	$87,615.00

HOWARD RD	FAIRVIEW AVE	ROTAN AVE	S	$160,155.00
HOWARD RD	MAKENNA DR	ST TROPEZ DR	S	$131,935.00
HOWARD RD	PARKING LOT ENTRANCE	PINE ST	S	$35,565.00
HOWARD RD	PINE ST	1405 HOWARD RD	N	$20,295.00
HOWARD RD	ROTAN AVE	1420 HOWARD RD	S	$95,055.00
HOWARD RD	SANTA LUCIA DR	ASILOMAR DR	N	$102,382.50
HOWARD RD	SCHNOOR AVE	DWYER AVE	S	$266,651.00
HOWARD RD	ST TROPEZ DR	BERRY DR	S	$25,050.00

HULL AVE

Total Cost for Street: **$947,355.00**

Survey Street	Start Street	End Street	Orientation	Cost
HULL AVE	A ST	STREET END	W	$488,655.00
HULL AVE	S LAKE ST	A ST	W	$176,750.00
HULL AVE	STREET END	A ST	E	$156,380.00
HULL AVE	SUNRISE AVE	S LAKE ST	W	$125,570.00

IMPERIAL DR

Total Cost for Street: **$296,500.00**

Survey Street	Start Street	End Street	Orientation	Cost
IMPERIAL DR	FILLMORE AVE	RIVERVIEW DR	E	$101,850.00
IMPERIAL DR	RIVERVIEW DR	UNIVERSITY AVE	W	$119,410.00
IMPERIAL DR	UNIVERSITY AVE	FILLMORE AVE	E	$75,240.00

INDEPENDENCE DRIVE

Total Cost for Street: **$650,955.00**

Survey Street	Start Street	End Street	Orientation	Cost
INDEPENDENCE DRIVE	1951 INDEPENDENCE DRIVE	VICTORY LANE	N/W/	$114,450.00
INDEPENDENCE DRIVE	1955 INDEPENDENCE DRIVE	1951 INDEPENDENCE DRIVE	N	$65,205.00
INDEPENDENCE DRIVE	PINE ST	PRIVATE	N	$201,450.00
INDEPENDENCE DRIVE	VICTORY LANE	PINE ST	S	$269,850.00

INDIGO DR

Total Cost for Street: **$205,235.00**

Survey Street	Start Street	End Street	Orientation	Cost
INDIGO DR	2275 INDIGO DR	2305 INDIGO DR	E	$32,565.00
INDIGO DR	2305 INDIGO DR	UMBER DR	E	$68,960.00
INDIGO DR	SCARLET DR	2020 INDIGO DR	E	$42,030.00
INDIGO DR	SEPIA CT	SCARLET DR	W	$61,680.00

INDUSTRIAL AVE

Total Cost for Street: **$264,171.00**

Survey Street	Start Street	End Street	Orientation	Cost
INDUSTRIAL AVE	SCHNOOR AVE	2300 INDUSTRIAL AVE	N	$264,171.00

IRONWOOD WAY

Total Cost for Street: **$276,642.50**

Survey Street	Start Street	End Street	Orientation	Cost
IRONWOOD WAY	FOXGLOVE WAY	N SCHNOOR AVE	W /	$129,297.50
IRONWOOD WAY	N SCHNOOR AVE	FOXGLOVE WAY	N / E	$147,345.00

ISLA VISTA CT

Total Cost for Street: **$225,945.00**

Survey Street	Start Street	End Street	Orientation	Cost
ISLA VISTA CT	3756 ISLA VISTA CT	CAITLAN DR	S/E/	$131,685.00
ISLA VISTA CT	886 ISLA VISTA CT	CAITLAN DR	S	$40,380.00
ISLA VISTA CT	CAITLAN DR	3772 ISLA VISTA CT	S	$53,880.00

IVORY CT

Total Cost for Street: **$197,895.00**

Survey Street	Start Street	End Street	Orientation	Cost
IVORY CT	1924 IVORY CT	1974 IVORY CT	S	$60,105.00
IVORY CT	1945 IVORY CT	AZURE DR	N	$33,960.00
IVORY CT	1975 IVORY CT	1945 IVORY CT	N	$41,340.00

IVORY CT	1984 IVORY CT	1996 IVORY CT	S	$21,000.00
IVORY CT	1997 IVORY CT	1985 IVORY CT	N	$31,110.00
IVORY CT	AZURE DR	1914 IVORY CT	S	$10,380.00

IVY GLEN DR

Total Cost for Street: **$321,300.00**

Survey Street	Start Street	End Street	Orientation	Cost
IVY GLEN DR	BENT OAK TR	DIAMANTE LN	N	$56,865.00
IVY GLEN DR	BOLINAS WAY	COLIMA AVE	N	$21,735.00
IVY GLEN DR	COLIMA AVE	RUBICON AVE	N	$35,580.00
IVY GLEN DR	ORCHARD HILL DR	BOLINAS WAY	N	$76,800.00
IVY GLEN DR	RUBICON AVE	BENT OAK TR	S	$130,320.00

JACKSON CT

Total Cost for Street: **$117,145.00**

Survey Street	Start Street	End Street	Orientation	Cost
JACKSON CT	JEFFERSON AVE	JEFFERSON AVE	E/N/	$117,145.00

JADEN CT

Total Cost for Street: **$116,100.00**

Survey Street	Start Street	End Street	Orientation	Cost
JADEN CT	1651 JADEN CT	SALVADOR WY	N	$54,555.00
JADEN CT	SALVADOR WY	1651 JADEN CT	S	$61,545.00

JAMES WAY

Total Cost for Street: **$462,863.00**

Survey Street	Start Street	End Street	Orientation	Cost
JAMES WAY	609 JAMES WAY	N D ST	N	$98,628.00
JAMES WAY	613 JAMES WAY	609 JAMES WAY	N	$10,368.00
JAMES WAY	701 JAMES WAY	AUSTIN AVE	N	$11,152.00
JAMES WAY	809 JAMES WAY	705 JAMES WAY	N	$102,760.00
JAMES WAY	AUSTIN AVE	N LAKE ST	S	$157,084.00
JAMES WAY	N D ST	400 JAMES WAY	S	$37,776.00
JAMES WAY	N LAKE ST	813 JAMES WAY	N	$45,095.00

JEFFERSON AVE

Total Cost for Street: **$799,290.00**

Survey Street	Start Street	End Street	Orientation	Cost
JEFFERSON AVE	1932 JEFFERSON AVE	ORCHARD AVE	S	$157,095.00
JEFFERSON AVE	ARTHUR CT	N SCHNOOR AVE	N	$26,760.00
JEFFERSON AVE	BAYLOR CT	CENTRAL PL	N	$74,520.00
JEFFERSON AVE	CENTRAL PL	ORCHARD AVE	N	$61,290.00
JEFFERSON AVE	HARRISON CT	ARTHUR CT	N	$48,000.00
JEFFERSON AVE	HARVARD AVE	BAYLOR CT	N	$62,880.00
JEFFERSON AVE	JACKSON CT	HARRISON CT	N	$59,985.00
JEFFERSON AVE	N SCHNOOR AVE	ARTHUR CT	S	$24,745.00
JEFFERSON AVE	ORCHARD AVE	WILLIAMS AVE	S	$112,835.00
JEFFERSON AVE	WILLIAMS AVE	HARVARD AVE	S	$171,180.00

JENNINGS ST

Total Cost for Street: **$5,115.00**

Survey Street	Start Street	End Street	Orientation	Cost
JENNINGS ST	1829 JENNINGS ST	1829 JENNINGS ST	N	$5,115.00

JERICHO DR

Total Cost for Street: **$760,569.00**

Survey Street	Start Street	End Street	Orientation	Cost
JERICHO DR	ADANAC WAY	E KENNEDY ST	W	$115,164.00
JERICHO DR	E KENNEDY ST	ADANAC WAY	E	$47,175.00
JERICHO DR	JOSEPHINE CT	MICHOACAN CT	W	$83,295.00
JERICHO DR	LACRETA AVE	SANARITA WY	W	$176,655.00
JERICHO DR	MICHOACAN CT	LACRETA AVE	W	$191,490.00

JERICHO DR	SANARITA WY	ADANAC WAY	W	$146,790.00

JESSE DR — Total Cost for Street: $314,166.00

Survey Street	Start Street	End Street	Orientation	Cost
JESSE DR	ADANAC WAY	E KENNEDY ST	W	$99,240.00
JESSE DR	E KENNEDY ST	ADANAC WAY	E	$31,884.00
JESSE DR	LACRETA AVE	SANARITA WY	W	$71,136.00
JESSE DR	SANARITA WY	ADANAC WAY	W	$111,906.00

JONATHAN WAY — Total Cost for Street: $367,520.00

Survey Street	Start Street	End Street	Orientation	Cost
JONATHAN WAY	ARBELLA LN	STEPHANIE LN	N	$187,540.00
JONATHAN WAY	STEPHANIE LN	ARBELLA LN	S	$179,980.00

JOSEPH LN — Total Cost for Street: $193,076.00

Survey Street	Start Street	End Street	Orientation	Cost
JOSEPH LN	132 JOSEPH LN	SONORA ST	S	$92,898.00
JOSEPH LN	SONORA ST	133 JOSEPH LN	N	$100,178.00

JOSEPHINE CT — Total Cost for Street: $474,983.00

Survey Street	Start Street	End Street	Orientation	Cost
JOSEPHINE CT	1480 JOSEPHINE CT	JERICHO DR	S	$117,195.00
JOSEPHINE CT	1489 JOSEPHINE CT	1480 JOSEPHINE CT	N	$23,055.00
JOSEPHINE CT	JERICHO DR	MADISON DR	S	$161,985.00
JOSEPHINE CT	MADISON DR	SALVADOR WY	N	$95,718.00
JOSEPHINE CT	SALVADOR WY	1501 JOSEPHINE CT	N	$77,030.00

JOY ST — Total Cost for Street: $4,224.00

Survey Street	Start Street	End Street	Orientation	Cost
JOY ST	1024 JOY ST	1028 JOY ST	W	$4,224.00

JOYA DR — Total Cost for Street: $277,720.00

Survey Street	Start Street	End Street	Orientation	Cost
JOYA DR	556 JOYA DR	EMILY WAY	S	$12,480.00
JOYA DR	DIAMOND WAY	534 JOYA DR	S	$107,830.00
JOYA DR	EMILY WAY	DIAMOND WAY	N	$157,410.00

JUDITH CT — Total Cost for Street: $161,385.00

Survey Street	Start Street	End Street	Orientation	Cost
JUDITH CT	STEPHANIE LN	STEPHANIE LN	N / S	$161,385.00

JUDITH WAY — Total Cost for Street: $468,255.00

Survey Street	Start Street	End Street	Orientation	Cost
JUDITH WAY	ARBELLA LN	STEPHANIE LN	N	$221,385.00
JUDITH WAY	STEPHANIE LN	ARBELLA LN	S	$246,870.00

KATHRYN AVE — Total Cost for Street: $324,330.00

Survey Street	Start Street	End Street	Orientation	Cost
KATHRYN AVE	1104 KATHRYN AVE	1110 KATHRYN AVE	S	$1,740.00
KATHRYN AVE	1110 KATHRYN AVE	AMY AVE	S	$42,240.00
KATHRYN AVE	1310 KATHRYN AVE	1419 KATHRYN AVE	S	$53,370.00
KATHRYN AVE	1317 KATHRYN AVE	ANNA AVE	N	$25,650.00
KATHRYN AVE	1419 KATHRYN AVE	1325 KATHRYN AVE	N	$29,625.00
KATHRYN AVE	AMY AVE	1304 KATHRYN AVE	S	$49,620.00
KATHRYN AVE	ANNA AVE	1104 KATHRYN AVE	N	$122,085.00

KELSEY LN

Total Cost for Street: $223,895.00

Survey Street	Start Street	End Street	Orientation	Cost
KELSEY LN	KENT DR	ZAK WAY	S	$111,820.00
KELSEY LN	ZAK WAY	KENT DR	N	$112,075.00

KENNEDY ST

Total Cost for Street: $800,659.00

Survey Street	Start Street	End Street	Orientation	Cost
KENNEDY ST	2085 AVE 16	2085 AVE 16	N	$8,400.00
KENNEDY ST	2095 KENNEDY ST	N SCHNOOR AVE	N	$25,596.00
KENNEDY ST	2140 KENNEDY ST	N SCHNOOR AVE	S	$127,944.00
KENNEDY ST	2179 KENNEDY ST	24925 KENNEDY ST	N	$241,299.00
KENNEDY ST	25353 KENNEDY ST	25353 KENNEDY ST	N	$20,940.00
KENNEDY ST	CURB RAMP	ELLIS ST	N/N	$126,960.00
KENNEDY ST	KENNEDY ST	2169 KENNEDY ST	NW/	$237,310.00
KENNEDY ST	MARKETPLACE DR	2295 MARKETPLACE DR	S	$1,350.00
KENNEDY ST	N SCHNOOR AVE	2290 MARKETPLACE DR	S	$10,860.00

KENNEY CT

Total Cost for Street: $101,862.00

Survey Street	Start Street	End Street	Orientation	Cost
KENNEY CT	A ST	A ST	N	$101,862.00

KENT DR

Total Cost for Street: $730,490.00

Survey Street	Start Street	End Street	Orientation	Cost
KENT DR	AVALON AVE	CAMBRIA AVE	W	$221,795.00
KENT DR	CAMBRIA AVE	DIANE WAY	E	$63,120.00
KENT DR	DIANE WAY	KIMMEL AVE	E	$49,515.00
KENT DR	KELSEY LN	AVALON AVE	E	$75,525.00
KENT DR	KIMMEL AVE	KELSEY LN	E	$51,150.00
KENT DR	SUMMER LN	WESTGATE DR	E	$75,000.00
KENT DR	WESTGATE DR	WINTER WAY	W	$135,045.00
KENT DR	WINTER WAY	SUMMER LN	E	$59,340.00

KENT WAY

Total Cost for Street: $260,715.00

Survey Street	Start Street	End Street	Orientation	Cost
KENT WAY	HAMPTON DR	FAIRFIELD WAY	E	$139,560.00
KENT WAY	REN WAY	WINTER WAY	E	$62,175.00
KENT WAY	WINTER WAY	REN WAY	W	$58,980.00

KENTON WAY

Total Cost for Street: $130,884.00

Survey Street	Start Street	End Street	Orientation	Cost
KENTON WAY	1380 KENTON WAY	HAMPTON DR	W	$124,854.00
KENTON WAY	FAIRFIELD WAY	1396 KENTON WAY	W	$6,030.00

KERN ST

Total Cost for Street: $83,424.00

Survey Street	Start Street	End Street	Orientation	Cost
KERN ST	1508 KERN ST	WRENWOOD WAY	W	$27,012.00
KERN ST	WRENWOOD WAY	ROBINWOOD WAY	E	$56,412.00

KIMBERLEY LN

Total Cost for Street: $347,874.00

Survey Street	Start Street	End Street	Orientation	Cost
KIMBERLEY LN	ALEXIS WAY	LYNMARIE WAY	N	$94,920.00
KIMBERLEY LN	LYNMARIE WAY	TEVIN WAY	S	$157,305.00
KIMBERLEY LN	TEVIN WAY	ALEXIS WAY	N	$95,649.00

KIMBERLY DR

Total Cost for Street: $472,150.00

Survey Street	Start Street	End Street	Orientation	Cost
KIMBERLY DR	DEBORAH LN	TAYLOR LANE	N	$49,500.00
KIMBERLY DR	STEVEN LANE	TAYLOR LANE	S	$172,050.00
KIMBERLY DR	TAYLOR LANE	DEBORAH LN	S	$250,600.00

KIMMEL AVE

Total Cost for Street: $310,902.50

Survey Street	Start Street	End Street	Orientation	Cost
KIMMEL AVE	3330 KIMMEL AVE	ZAK WAY	S	$7,320.00
KIMMEL AVE	KENT DR	3342 KIMMEL AVE	S	$103,905.00
KIMMEL AVE	WESTBERRY BVD	ZAK WAY	N	$34,035.00
KIMMEL AVE	ZAK WAY	WESTBERRY BVD	S	$165,642.50

KIWI ST

Total Cost for Street: $230,184.00

Survey Street	Start Street	End Street	Orientation	Cost
KIWI ST	711 KIWI ST	MADARIN ST	E	$22,356.00
KIWI ST	E ALMOND AVE	PEAR ST	W	$66,681.00
KIWI ST	GRAPE ST	E ALMOND AVE	E	$93,757.50
KIWI ST	MADARIN ST	E ALMOND AVE	W	$16,321.50
KIWI ST	PEAR ST	GRAPE ST	W	$31,068.00

KNOX AVE

Total Cost for Street: $549,551.50

Survey Street	Start Street	End Street	Orientation	Cost
KNOX AVE	377 KNOX AVE	LILLY ST	E	$108,936.00
KNOX AVE	A ST	301 KNOX AVE	E	$56,014.00
KNOX AVE	CARRY AVE	SUNRISE AVE	E	$60,192.00
KNOX AVE	LILLY ST	CARRY AVE	E	$36,252.00
KNOX AVE	SUNRISE AVE	A ST	W	$288,157.50

KNOX CT

Total Cost for Street: $115,920.00

Survey Street	Start Street	End Street	Orientation	Cost
KNOX CT	138 KNOX CT	S A ST	E	$53,910.00
KNOX CT	S A ST	158 KNOX CT	W	$62,010.00

KNOX RD

Total Cost for Street: $1,065,455.00

Survey Street	Start Street	End Street	Orientation	Cost
KNOX RD	LOS ARCOS LN	CHERRY ST	W	$65,200.00
KNOX RD	POMEGRANATE ST	DEL LAGO WAY	E	$337,095.00
KNOX RD	RD 28	E ALMOND AVE	NE	$663,160.00

KNOX ST

Total Cost for Street: $2,063,590.00

Survey Street	Start Street	End Street	Orientation	Cost
KNOX ST	93 DRAKE ST	93 DRAKE ST	W	$13,080.00
KNOX ST	ARDILLA DR	OLIVE AVE	W	$91,850.00
KNOX ST	CHERRY ST	NECTARINE ST	W	$135,915.00
KNOX ST	DEL LAGO WAY	ORTEGA DR	E	$193,815.00
KNOX ST	E ALMOND AVE	RD 28	SW	$1,046,490.00
KNOX ST	NECTARINE ST	E ALMOND AVE	W	$70,500.00
KNOX ST	NEPLUS WY	LOS ARCOS LN	W	$228,795.00
KNOX ST	OLIVE AVE	ARDILLA DR	E	$37,590.00
KNOX ST	ORTEGA DR	OLIVE AVE	E	$201,915.00
KNOX ST	OSO DR	ARDILLA DR	W	$43,640.00

KOUFAX DR

Total Cost for Street: $143,460.00

Survey Street	Start Street	End Street	Orientation	Cost

KOUFAX DR	DRYSDALE WAY	LILLY ST	NW	$61,680.00
KOUFAX DR	LILLY ST	DRYSDALE WAY	SE	$81,780.00

LA COSTA CT

Total Cost for Street: **$49,680.00**

Survey Street	Start Street	End Street	Orientation	Cost
LA COSTA CT	1449 LA COSTA CT	CORONA DR	N	$23,280.00
LA COSTA CT	CORONA DR	1444 LA COSTA CT	S	$26,400.00

LA JOLLA CT

Total Cost for Street: **$193,025.00**

Survey Street	Start Street	End Street	Orientation	Cost
LA JOLLA CT	1128 LA JOLLA CT	BRIQUEL AVE	S	$61,380.00
LA JOLLA CT	TALISE AVE	1128 LA JOLLA CT	N	$131,645.00

LA JOLLA WY

Total Cost for Street: **$548,050.00**

Survey Street	Start Street	End Street	Orientation	Cost
LA JOLLA WY	1450 LA JOLLA WAY	1522 LA JOLLA WAY	S	$98,850.00
LA JOLLA WY	1546 LA JOLLA WAY	SALVADOR WY	S	$66,420.00
LA JOLLA WY	BRIQUEL AVE	1450 LA JOLLA WY	S	$160,680.00
LA JOLLA WY	SALVADOR WY	ZAPATA ST	N	$110,095.00
LA JOLLA WY	ZAPATA ST	TALISE AVE	N	$112,005.00

LA PERLA LN

Total Cost for Street: **$145,760.00**

Survey Street	Start Street	End Street	Orientation	Cost
LA PERLA LN	LAS FRESAS WAY	VARBELLA PK	N	$78,000.00
LA PERLA LN	VARBELLA PK	LAS FRESAS WAY	S	$67,760.00

LA QUINTA WAY

Total Cost for Street: **$388,044.50**

Survey Street	Start Street	End Street	Orientation	Cost
LA QUINTA WAY	1343 LA QUINTA WAY	RANCHO MIRAGE RD	N	$9,720.00
LA QUINTA WAY	HACIENDA ST	SAN GABRIEL DR	S	$125,689.50
LA QUINTA WAY	RANCHO MIRAGE RD	HACIENDA ST	S	$48,600.00
LA QUINTA WAY	SAN GABRIEL DR	1353 LA QUINTA WAY	N	$204,035.00

LACRETA AVE

Total Cost for Street: **$928,532.00**

Survey Street	Start Street	End Street	Orientation	Cost
LACRETA AVE	1216 LACRETA AVE	JESSIE DR	S	$8,160.00
LACRETA AVE	1601 LACRETA AVE	JERICHO DR	N	$123,154.00
LACRETA AVE	AMY AVE	MERCED ST	N	$63,929.00
LACRETA AVE	JERICHO DR	MADISON DR	S	$369,117.00
LACRETA AVE	JESSE DR	DOMINGUEZ DR	S	$87,591.00
LACRETA AVE	MADISON DR	1611 LACRETA AVE	N	$83,558.00
LACRETA AVE	MERCED ST	1212 LACRETA AVE	S	$52,533.00
LACRETA AVE	SANARITA WY	JERICHO DR	S	$140,490.00

LAGUNA WAY

Total Cost for Street: **$833,135.50**

Survey Street	Start Street	End Street	Orientation	Cost
LAGUNA WAY	1121 LAGUNA WAY	1192 LAGUNA WAY	S	$123,160.00
LAGUNA WAY	1191 LAGUNA WAY	1121 LAGUNA WAY	N	$120,260.00
LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	S	$327,911.50
LAGUNA WAY	1375 LAGUNA WAY	SAN SEBASTIAN WAY	N	$45,914.00
LAGUNA WAY	ALICANTE WAY	BARCELONA WAY	N	$39,735.00
LAGUNA WAY	BARCELONA WAY	1197 LAGUNA WAY	N	$56,560.00
LAGUNA WAY	SAN SEBASTIAN WAY	TOLUCA	N	$54,315.00
LAGUNA WAY	TOLUCA	ALICANTE WAY	N	$65,280.00

LARRETE AVE — *Total Cost for Street:* $330,485.00

Survey Street	Start Street	End Street	Orientation	Cost
LARRETE AVE	FAIRFIELD WAY	FAIRWAY AVE	E	$161,190.00
LARRETE AVE	FAIRWAY AVE	FAIRFIELD WAY	W	$169,295.00

LAS CASAS LN — *Total Cost for Street:* $182,060.00

Survey Street	Start Street	End Street	Orientation	Cost
LAS CASAS LN	1070 LAS CASAS LN	LAS FRESAS WAY	S	$19,140.00
LAS CASAS LN	963 LAS CASAS LN	VARBELLA PK	N	$16,800.00
LAS CASAS LN	LAS FRESAS WAY	983 LAS CASAS LN	N	$75,740.00
LAS CASAS LN	VARBELLA PK	1052 LAS CASAS LN	S	$70,380.00

LAS FRESAS WAY — *Total Cost for Street:* $274,000.00

Survey Street	Start Street	End Street	Orientation	Cost
LAS FRESAS WAY	LA PERLA LN	LAS CASAS LN	W	$84,720.00
LAS FRESAS WAY	LAS CASAS LN	LOS ARCOS LN	W	$85,080.00
LAS FRESAS WAY	LOS ARCOS LN	LA PERLA LN	E	$104,200.00

LAUREL ST — *Total Cost for Street:* $131,505.00

Survey Street	Start Street	End Street	Orientation	Cost
LAUREL ST	684 LAUREL ST	662 LAUREL ST	W	$35,520.00
LAUREL ST	774 LAUREL ST	708 LAUREL ST	W	$95,985.00

LEMON AVE — *Total Cost for Street:* $893,307.00

Survey Street	Start Street	End Street	Orientation	Cost
LEMON AVE	1843 LEMON AVE	SAN JOSE AVE	E	$26,115.00
LEMON AVE	2066 SAN BRUNO AVE	MANGO AVE	NW	$35,175.00
LEMON AVE	GEORGIA AVE	2044 GEORGIA AVE	NW	$4,620.00
LEMON AVE	HAZEL AVE	GEORGIA AVE	E	$112,404.00
LEMON AVE	MANGO AVE	HAZEL AVE	W	$25,500.00
LEMON AVE	NAVEL AVE	SAUNDERS AVE	E	$69,220.00
LEMON AVE	PARKWOOD AVE	PERKINS AVE	E	$42,879.00
LEMON AVE	PERKINS AVE	PARKWOOD AVE	W	$78,780.00
LEMON AVE	SAN BRUNO AVE	SAN DIEGO AVE	E	$79,350.00
LEMON AVE	SAN CARLOS AVE	STANFORD AVE	E	$67,575.00
LEMON AVE	SAN DIEGO AVE	SAN BRUNO AVE	W	$138,969.00
LEMON AVE	SAN JOSE AVE	SAN RAMON AVE	W	$34,170.00
LEMON AVE	SAN RAMON AVE	SAN JOSE AVE	E	$12,830.00
LEMON AVE	SAUNDERS AVE	NAVEL AVE	W	$79,500.00
LEMON AVE	STANFORD AVE	SAN CARLOS AVE	W	$86,220.00

LEMON TREE DR — *Total Cost for Street:* $291,560.00

Survey Street	Start Street	End Street	Orientation	Cost
LEMON TREE DR	ALMOND AVE	PEAR TREE DR	W	$29,700.00
LEMON TREE DR	PEAR TREE DR	CHERRY TREE DR	W	$261,860.00

LEWIS ST — *Total Cost for Street:* $65,662.00

Survey Street	Start Street	End Street	Orientation	Cost
LEWIS ST	113 LEWIS ST	MONTEREY ST	N	$28,404.00
LEWIS ST	MONTEREY ST	316 LEWIS ST	S	$37,258.00

LIBERTY LN — *Total Cost for Street:* $586,590.00

Survey Street	Start Street	End Street	Orientation	Cost
LIBERTY LN	BARON ST	STATE ST	E	$88,260.00
LIBERTY LN	DOUBLE TREE WAY	SUNSET AVE	W	$292,245.00

LIBERTY LN	STATE ST	TODD ST	E	$70,170.00
LIBERTY LN	SUNSET AVE	BARON ST	E	$72,195.00
LIBERTY LN	TODD ST	DOUBLE TREE WAY	E	$63,720.00

LIGHTHOUSE CT

Total Cost for Street: **$78,290.00**

Survey Street	Start Street	End Street	Orientation	Cost
LIGHTHOUSE CT	MAINBERRY DR	MAINBERRY DR	N/W/	$78,290.00

LIGHTHOUSE DR

Total Cost for Street: **$329,485.00**

Survey Street	Start Street	End Street	Orientation	Cost
LIGHTHOUSE DR	HARBOR DR	SHANNON AVE	S	$67,155.00
LIGHTHOUSE DR	MAINBERRY DR	HARBOR DR	S	$159,835.00
LIGHTHOUSE DR	SHANNON AVE	MAINBERRY DR	N	$102,495.00

LILLY ST

Total Cost for Street: **$2,448,592.00**

Survey Street	Start Street	End Street	Orientation	Cost
LILLY ST	309 LILLY ST	WASHINGTON ST	NE	$11,310.00
LILLY ST	314 LILLY ST	328 LILLY ST	SW	$30,072.00
LILLY ST	601 LILLY ST	CLINTON ST	NE	$672,510.00
LILLY ST	736 LILLY ST	SUNRISE AVE	SW	$190,165.00
LILLY ST	801 LILLY ST	106 LILLY ST	NE	$45,279.00
LILLY ST	CANAL ST	SAWMILL ST	SW	$186,670.00
LILLY ST	CARRY AVE	LILLY ST	W	$49,692.00
LILLY ST	KNOX AVE	LILLY ST	S	$65,030.00
LILLY ST	KOUFAX DR	PARKING LOT ENTRANCE	NE	$350,160.00
LILLY ST	LILLY ST	SAWMILL ST	SW	$257,912.00
LILLY ST	PODRES LN	KOUFAX DR	NE	$97,620.00
LILLY ST	SAWMILL ST	665 SOQUEL CT	SW	$90,900.00
LILLY ST	SUNRISE AVE	CARRY AVE	W	$360,984.00
LILLY ST	WASHINGTON ST	304 LILLY ST	SW	$40,288.00

LIME AVE

Total Cost for Street: **$333,063.00**

Survey Street	Start Street	End Street	Orientation	Cost
LIME AVE	2055 LIME AVE	GEORGIA AVE	E	$57,015.00
LIME AVE	GEORGIA AVE	MANGO AVE	W	$135,135.00
LIME AVE	MANGO AVE	2065 LIME AVE	E	$55,500.00
LIME AVE	SAN BRUNO AVE	GEORGIA AVE	NW	$85,413.00

LINDA MESA DR

Total Cost for Street: **$384,285.00**

Survey Street	Start Street	End Street	Orientation	Cost
LINDA MESA DR	1416 LINDA MESA DR	SAN GABRIEL DR	S	$97,920.00
LINDA MESA DR	RANCHO MIRAGE RD	1416 LINDA MESA DR	S	$92,765.00
LINDA MESA DR	SAN GABRIEL DR	RANCHO MIRAGE RD	N	$193,600.00

LINDEN ST

Total Cost for Street: **$20,280.00**

Survey Street	Start Street	End Street	Orientation	Cost
LINDEN ST	779 LINDEN ST	W PARK DR	E	$20,280.00

LOMA LINDA LN

Total Cost for Street: **$304,380.00**

Survey Street	Start Street	End Street	Orientation	Cost
LOMA LINDA LN	1403 LINDA MESA DR	RANCHO MIRAGE RD	N	$104,640.00
LOMA LINDA LN	CORONA DR	1403 LOMA LINDA LN	S/E/	$59,640.00
LOMA LINDA LN	RANCHO MIRAGE RD	RANCHO SANTA FE DR	S	$71,400.00
LOMA LINDA LN	RANCHO SANTA FE DR	CORONA DR	S	$68,700.00

LOS ARCOS LN — Total Cost for Street: $341,454.00

Survey Street	Start Street	End Street	Orientation	Cost
LOS ARCOS LN	336 KNOX ST	KNOX ST	S	$12,720.00
LOS ARCOS LN	983 LOS ARCOS LN	VARBELLA PK	N	$21,000.00
LOS ARCOS LN	KNOX ST	SOLANO ST	N	$74,355.00
LOS ARCOS LN	LAS FRESAS WAY	983 LAS CASAS LN	N	$62,040.00
LOS ARCOS LN	SOLANO ST	LAS FRESAS WAY	N	$71,415.00
LOS ARCOS LN	VARBELLA PK	960 LOS ARCOS LN	S	$99,924.00

LOS CERRITOS WAY — Total Cost for Street: $131,295.00

Survey Street	Start Street	End Street	Orientation	Cost
LOS CERRITOS WAY	ARDILLA DR	OSO DR	E	$45,980.00
LOS CERRITOS WAY	OSO DR	ARDILLA DR	W	$85,315.00

LOS OSOS CT — Total Cost for Street: $89,735.00

Survey Street	Start Street	End Street	Orientation	Cost
LOS OSOS CT	CAITLAN DR	CAITLAN DR	S/E/	$89,735.00

LOVE CT — Total Cost for Street: $43,505.00

Survey Street	Start Street	End Street	Orientation	Cost
LOVE CT	PAINTBRUSH DR	PAINTBRUSH DR	S / N	$43,505.00

LUCCA COURT — Total Cost for Street: $54,375.00

Survey Street	Start Street	End Street	Orientation	Cost
LUCCA COURT	1250 LUCCA COURT	MILANO LANE	W	$15,900.00
LUCCA COURT	MILANO LANE	1250 LUCCA COURT	E	$38,475.00

LUCIA WAY — Total Cost for Street: $476,131.00

Survey Street	Start Street	End Street	Orientation	Cost
LUCIA WAY	ASHLAN WAY	NOREEN WAY	W	$100,071.00
LUCIA WAY	ASTI WAY	LYNN WAY	E	$35,688.00
LUCIA WAY	GABRIEL WAY	ASTI WAY	E	$54,765.00
LUCIA WAY	LYNN WAY	GABRIEL WAY	W	$149,143.00
LUCIA WAY	NOREEN WAY	RENEE WAY	E	$61,728.00
LUCIA WAY	RENEE WAY	ASHLAN WAY	E	$74,736.00

LYNMARIE WAY — Total Cost for Street: $159,615.00

Survey Street	Start Street	End Street	Orientation	Cost
LYNMARIE WAY	1385 LYNMARIE WAY	MACADAMIA AVE	E	$42,315.00
LYNMARIE WAY	KIMBERLEY LN	1407 LYNMARIE WAY	E	$25,680.00
LYNMARIE WAY	MACADAMIA AVE	KIMBERLEY LN	W	$91,620.00

LYNN WAY — Total Cost for Street: $263,147.00

Survey Street	Start Street	End Street	Orientation	Cost
LYNN WAY	LUCIA WAY	NOREEN WAY	S	$95,807.00
LYNN WAY	NOREEN WAY	SONORA ST	N	$103,005.00
LYNN WAY	SONORA ST	LUCIA WAY	S	$64,335.00

LYONS ST — Total Cost for Street: $89,010.00

Survey Street	Start Street	End Street	Orientation	Cost
LYONS ST	821 E YOSEMITE AVE	E YOSEMITE AVE	SW	$89,010.00

MACADAMIA AVE — Total Cost for Street: $885,698.00

Survey Street	Start Street	End Street	Orientation	Cost
MACADAMIA AVE	1340 LYNMARIE WAY	LYNMARIE WAY	S	$28,440.00
MACADAMIA AVE	655 MACADAMIA AVE	551 MACADAMIA AVE	N	$58,944.00

MACADAMIA AVE	701 MACADAMIA AVE	655 MACADAMIA AVE	N	$47,940.00
MACADAMIA AVE	ALEXIS WAY	TEVIN WAY	S	$89,277.00
MACADAMIA AVE	BARNETT WAY	701 MACADAMIA AVE	N	$289,575.00
MACADAMIA AVE	FILBERT ST	HICKORY AVE	S	$183,629.00
MACADAMIA AVE	HICKORY AVE	1340 MACADAMIA AVE	S	$60,420.00
MACADAMIA AVE	LYNMARIE WAY	ALEXIS WAY	S	$88,713.00
MACADAMIA AVE	TEVIN WAY	BARNETT WAY	S	$38,760.00

MACE ST

Total Cost for Street: **$135,316.50**

Survey Street	Start Street	End Street	Orientation	Cost
MACE ST	E YOSEMITE AVE	5TH ST	NE	$135,316.50

MADARIN ST

Total Cost for Street: **$209,169.00**

Survey Street	Start Street	End Street	Orientation	Cost
MADARIN ST	1428 MADARIN ST	PEAR ST	N	$44,833.50
MADARIN ST	1438 MADARIN ST	1438 MADARIN ST	N	$7,344.00
MADARIN ST	BLUEBERRY LN	KIWI ST	S	$67,284.00
MADARIN ST	KIWI ST	1448 MADARIN ST	N	$26,514.00
MADARIN ST	PEAR ST	BLUEBERRY LN	S	$63,193.50

MADISON DR

Total Cost for Street: **$661,622.00**

Survey Street	Start Street	End Street	Orientation	Cost
MADISON DR	1959 MADISON DR	EISENHOWER LN	E	$43,995.00
MADISON DR	ADANAC WAY	TYLER LN	W	$13,360.00
MADISON DR	EISENHOWER LN	JOSEPHINE CT	W	$68,665.00
MADISON DR	HOOVER AVE	PIERCE LN	E	$85,080.00
MADISON DR	JOSEPHINE CT	LACRETA AVE	W	$85,224.00
MADISON DR	LACRETA AVE	ADANAC WAY	W	$108,000.00
MADISON DR	PIERCE LN	1941 MADISON DR	E	$103,595.00
MADISON DR	TYLER LN	HOOVER AVE	E	$153,703.00

MADRID LN

Total Cost for Street: **$499,961.00**

Survey Street	Start Street	End Street	Orientation	Cost
MADRID LN	COLOMBARD DR	MONTEREY DR	N	$239,984.00
MADRID LN	CONCORD AVE	SENECA AVE	S	$86,940.00
MADRID LN	MONTEREY DR	CONCORD AVE	S	$92,079.00
MADRID LN	SENECA AVE	COLOMBARD DR	S	$80,958.00

MAGNOLIA ST

Total Cost for Street: **$90,360.00**

Survey Street	Start Street	End Street	Orientation	Cost
MAGNOLIA ST	316 MAGNOLIA ST	320 MAGNOLIA ST	SW	$16,352.00
MAGNOLIA ST	331 MAGNOLIA ST	323 MAGNOLIA ST	NE	$34,836.00
MAGNOLIA ST	334 MAGNOLIA ST	334 MAGNOLIA ST	SW	$6,920.00
MAGNOLIA ST	338 MAGNOLIA ST	CLINTON ST	SW	$13,920.00
MAGNOLIA ST	911 WASHINGTON ST	WASHINGTON ST	SW	$10,992.00
MAGNOLIA ST	940 CROSS ST	940 CROSS ST	SW	$7,340.00

MAINBERRY DR

Total Cost for Street: **$1,245,282.50**

Survey Street	Start Street	End Street	Orientation	Cost
MAINBERRY DR	BAY CT	DRIFTWOOD DR	E	$65,970.00
MAINBERRY DR	BAY VIEW DR	LIGHTHOUSE DR	E	$108,390.00
MAINBERRY DR	DRIFTWOOD DR	RIVERVIEW DR	E	$104,705.00
MAINBERRY DR	LIGHTHOUSE CT	VENTURI CT	W	$91,440.00
MAINBERRY DR	LIGHTHOUSE DR	LIGHTHOUSE CT	W	$82,777.50
MAINBERRY DR	PACIFIC CT	BAY CT	E	$16,860.00

MAINBERRY DR	PRIVATE	SUNSET AVE	W	$120,795.00
MAINBERRY DR	RIVERVIEW DR	PRIVATE	W	$546,075.00
MAINBERRY DR	SUNSET AVE	BAY VIEW DR	E	$4,305.00
MAINBERRY DR	VENTURI CT	PRIVATE	W	$67,095.00
MAINBERRY DR	W PARK DR	PACIFIC CT	E	$36,870.00

MAJESTIC CT

Total Cost for Street: $148,475.25

Survey Street	Start Street	End Street	Orientation	Cost
MAJESTIC CT	1254 MAJESTIC CT	1294 MAJESTIC CT	W	$46,723.50
MAJESTIC CT	1295 MAJESTIC CT	GARY LN	E	$68,946.75
MAJESTIC CT	GARY LN	1232 MAJESTIC CT	W	$32,805.00

MAJESTIC WAY

Total Cost for Street: $121,275.00

Survey Street	Start Street	End Street	Orientation	Cost
MAJESTIC WAY	BO TREE LN	GARY LN	W	$63,875.00
MAJESTIC WAY	GARY LN	BO TREE LN	E	$57,400.00

MAKENNA DR

Total Cost for Street: $349,830.00

Survey Street	Start Street	End Street	Orientation	Cost
MAKENNA DR	DESERT RANCH WAY	MAPLE ST	E	$62,220.00
MAKENNA DR	EAGLE WAY	HOWARD RD	E	$16,350.00
MAKENNA DR	HOWARD RD	OAK ST	W	$82,920.00
MAKENNA DR	MAPLE ST	DESERT RANCH WAY	W	$112,320.00
MAKENNA DR	OAK ST	EAGLE WAY	E	$28,080.00
MAKENNA DR	PLUMAS ST	MAPLE ST	W	$47,940.00

MALONE ST

Total Cost for Street: $108,409.50

Survey Street	Start Street	End Street	Orientation	Cost
MALONE ST	313 MALONE ST	WASHINGTON ST	NE	$36,616.50
MALONE ST	324 MALONE ST	CLINTON ST	SW	$71,793.00

MANDANA WAY

Total Cost for Street: $123,615.00

Survey Street	Start Street	End Street	Orientation	Cost
MANDANA WAY	FAIRWAY AVE	MATEO WAY	W	$51,180.00
MANDANA WAY	MATEO WAY	FAIRWAY AVE	E	$72,435.00

MANGO AVE

Total Cost for Street: $356,764.00

Survey Street	Start Street	End Street	Orientation	Cost
MANGO AVE	LEMON AVE	LIME AVE	N	$91,380.00
MANGO AVE	LIME AVE	TANGERINE AVE	N	$83,355.00
MANGO AVE	RAYMOND THOMAS ST	LEMON AVE	S	$139,909.00
MANGO AVE	TANGERINE AVE	RAYMOND THOMAS ST	N	$42,120.00

MANRESA DR

Total Cost for Street: $154,735.00

Survey Street	Start Street	End Street	Orientation	Cost
MANRESA DR	3534 MANRESA DR	SANTA LUCIA DR	S	$11,640.00
MANRESA DR	ASILOMAR DR	3534 MANRESA DR	S	$63,795.00
MANRESA DR	SANTA LUCIA DR	ASILOMAR DR	N	$79,300.00

MANZANA CT

Total Cost for Street: $284,755.00

Survey Street	Start Street	End Street	Orientation	Cost
MANZANA CT	401 MANZANA CT	CLINTON ST	NE	$2,715.00
MANZANA CT	407 MANZANA CT	403 MANZANA CT	NE	$35,610.00
MANZANA CT	420 MANZANA CT	AVILA WAY	SW	$33,540.00
MANZANA CT	451 MANZANA CT	409 MANZANA CT	NE	$74,895.00
MANZANA CT	467 MANZANA CT	459 MANZANA CT	NE	$17,980.00

MANZANA CT	AVILA WAY	468 MANZANA CT	SW	$66,915.00
MANZANA CT	CLINTON ST	406 MANZANA CT	SW	$53,100.00

MAPLE ST

Total Cost for Street: $735,660.00

Survey Street	Start Street	End Street	Orientation	Cost
MAPLE ST	2884 MAPLE ST	ST TROPEZ DR	S	$32,760.00
MAPLE ST	300 SANTA BONITA ST	SANTA BONITA ST	S	$50,580.00
MAPLE ST	329 MAPLE ST	S DOUBLE TREE WAY	N	$52,560.00
MAPLE ST	CYPRESS ST	PINE ST	N	$91,830.00
MAPLE ST	MAKENNA DR	2884 MAPLE ST	S	$107,050.00
MAPLE ST	PINE ST	311 MAPLE ST	S	$48,520.00
MAPLE ST	S DOUBLE TREE WAY	MAKENNA DR	S	$169,320.00
MAPLE ST	S WOLFTRAP ST	3017 MAPLE ST	N	$37,440.00
MAPLE ST	SANTA CLARA	STADIUM RD	N	$68,460.00
MAPLE ST	ST TROPEZ DR	MAKENNA DR	N	$77,140.00

MAPLE STREET

Total Cost for Street: $127,965.00

Survey Street	Start Street	End Street	Orientation	Cost
MAPLE STREET	BERRY DRIVE	TOSCHI DRIVE	S	$60,090.00
MAPLE STREET	TOSCHI DRIVE	BERRY DRIVE	N	$67,875.00

MARIE DR

Total Cost for Street: $427,752.50

Survey Street	Start Street	End Street	Orientation	Cost
MARIE DR	2611 MARIE DR	GLADE AVE	NW	$132,360.00
MARIE DR	GLADE AVE	KIMBERLEY LN	N	$76,047.50
MARIE DR	STEVEN LANE	TAYLOR LANE	SE	$181,965.00
MARIE DR	TAYLOR LANE	2611 MARIE DR	SE	$37,380.00

MARINA DR

Total Cost for Street: $108,365.00

Survey Street	Start Street	End Street	Orientation	Cost
MARINA DR	ASILOMAR DR	SANTA LUCIA DR	S	$64,575.00
MARINA DR	SANTA LUCIA DR	ASILOMAR DR	N	$43,790.00

MARIPOSA ST

Total Cost for Street: $347,080.00

Survey Street	Start Street	End Street	Orientation	Cost
MARIPOSA ST	1416 MARIPOSA ST	OSO DR	W	$157,995.00
MARIPOSA ST	ARDILLA DR	OLIVE AVE	W	$34,155.00
MARIPOSA ST	DOME AVE	A ST	E	$47,055.00
MARIPOSA ST	OLIVE AVE	ARDILLA DR	E	$23,715.00
MARIPOSA ST	OSO DR	DOME AVE	E	$84,160.00

MATEO WAY

Total Cost for Street: $195,855.00

Survey Street	Start Street	End Street	Orientation	Cost
MATEO WAY	HILLSBORO AVE	MANDANA WAY	N	$91,740.00
MATEO WAY	MANDANA WAY	HILLSBORO AVE	S	$104,115.00

MEADOWREST WAY

Total Cost for Street: $366,450.00

Survey Street	Start Street	End Street	Orientation	Cost
MEADOWREST WAY	ASPEN LN	SUNDANCE LN	N	$177,690.00
MEADOWREST WAY	SUNDANCE LN	ASPEN LN	S	$188,760.00

MERCED ST

Total Cost for Street: $1,045,906.00

Survey Street	Start Street	End Street	Orientation	Cost
MERCED ST	1081 E ADELL ST	E ADELL ST	W	$41,295.00
MERCED ST	1832 MERCED ST	1832 MERCED ST	W	$69,015.00
MERCED ST	1848 MERCED ST	1832 MERCED ST	W	$47,105.00

MERCED ST	CARMEN AVE	E ELLIS ST	E	$112,035.00
MERCED ST	CONSTRUCTION	LACRETA AVE	E	$108,660.00
MERCED ST	E ADELL ST	E KENNEDY ST	W	$63,059.00
MERCED ST	E ELLIS ST	HAWK LN	W	$56,160.00
MERCED ST	E KENNEDY ST	CONSTRUCTION	E	$124,155.00
MERCED ST	E RIVERSIDE DR	784 MERCED ST	W	$17,550.00
MERCED ST	GREEN WAY	E CLEVELAND AVE	W	$69,552.00
MERCED ST	HAWK LN	1901 MERCED ST	W	$53,220.00
MERCED ST	LACRETA AVE	CARMEN AVE	E	$197,460.00
MERCED ST	W SHERWOOD WAY	GREEN WAY	W	$86,640.00

MERLOT AVE

Total Cost for Street: **$1,329,830.00**

Survey Street	Start Street	End Street	Orientation	Cost
MERLOT AVE	3042 MERLOT AVE	S WOLFTRAP ST	S	$19,200.00
MERLOT AVE	706 MERLOT AVE	SANTA BONITA ST	S	$167,040.00
MERLOT AVE	BARBERA AVE	CHABLIS AVE	N	$30,060.00
MERLOT AVE	BLUERIDGE DR	712 MERLOT AVE	S	$12,075.00
MERLOT AVE	CHABLIS AVE	GRENACHE AVE	N	$61,005.00
MERLOT AVE	GRANADA DR	PETITE AVE	N	$86,775.00
MERLOT AVE	GRENACHE AVE	PETITE AVE	S	$108,260.00
MERLOT AVE	PETITE AVE	GRANADA DR	S	$161,760.00
MERLOT AVE	S TIMBERLINE DR	3042 MERLOT AVE	S	$246,225.00
MERLOT AVE	S WOLFTRAP ST	S TIMBERLINE DR	N	$178,095.00
MERLOT AVE	SANTA BONITA ST	BLUERIDGE DR	N	$189,735.00
MERLOT AVE	WESTBERRY BVD	S TIMBERLINE DR	S	$69,600.00

MICHOACAN CT

Total Cost for Street: **$530,176.50**

Survey Street	Start Street	End Street	Orientation	Cost
MICHOACAN CT	1419 MICHOACAN CT	1490 MICHOACAN CT	S	$54,615.00
MICHOACAN CT	1491 MICHOACAN CT	1471 MICHOACAN CT	N	$39,960.00
MICHOACAN CT	1498 MICHOACAN CT	JERICHO DR	S	$41,940.00
MICHOACAN CT	1621 MICHOACAN CT	JERICHO DR	N	$72,285.00
MICHOACAN CT	1633 MICHOACAN CT	1621 MICHOACAN CT	N	$28,500.00
MICHOACAN CT	1645 MICHOACAN CT	1645 MICHOACAN CT	N	$10,020.00
MICHOACAN CT	JERICHO DR	1645 MICHOACAN CT	S	$282,856.50

MILANO LANE

Total Cost for Street: **$466,365.00**

Survey Street	Start Street	End Street	Orientation	Cost
MILANO LANE	LUCCA COURT	NAPOLI ST	N	$36,015.00
MILANO LANE	MONTEREY ST	POMPEI ST	N	$7,590.00
MILANO LANE	NAPOLI ST	STADIUM RD	N	$21,315.00
MILANO LANE	POMPEI ST	MONTEREY ST	S	$112,110.00
MILANO LANE	ROMA COURT	POMPEI ST	S	$83,235.00
MILANO LANE	STADIUM RD	ROMA COURT	S	$206,100.00

MILLVIEW DR

Total Cost for Street: **$149,524.00**

Survey Street	Start Street	End Street	Orientation	Cost
MILLVIEW DR	409 MILLVIEW DR	CLINTON ST	NE	$28,336.00
MILLVIEW DR	425 MILLVIEW DR	409 MILLVIEW DR	NE	$44,112.00
MILLVIEW DR	CLINTON ST	420 MILLVIEW DR	SW	$77,076.00

MILOW ST

Total Cost for Street: **$125,940.00**

Survey Street	Start Street	End Street	Orientation	Cost
MILOW ST	FRITZ ST	SOLANO ST	N	$58,920.00

MILOW ST	SOLANO ST	FRITZ ST	S	$67,020.00

MIRA LOMA WAY — Total Cost for Street: $33,015.00

Survey Street	Start Street	End Street	Orientation	Cost
MIRA LOMA WAY	SAN GABRIEL DR	TOZER ST	S	$16,815.00
MIRA LOMA WAY	TOZER ST	SAN GABRIEL DR	N	$16,200.00

MITCHELL CT — Total Cost for Street: $7,635.00

Survey Street	Start Street	End Street	Orientation	Cost
MITCHELL CT	GRANADA DR	2592 MITCHELL CT	S	$7,635.00

MODOC ST — Total Cost for Street: $354,535.00

Survey Street	Start Street	End Street	Orientation	Cost
MODOC ST	DWYER AVE	SCHNOOR AVE	N	$279,975.00
MODOC ST	SCHNOOR AVE	1920 MODOC ST	S	$74,560.00

MONARCH RD — Total Cost for Street: $260,440.00

Survey Street	Start Street	End Street	Orientation	Cost
MONARCH RD	ARDILLA DR	DOME AVE	E	$129,380.00
MONARCH RD	DOME AVE	ARDILLA DR	W	$131,060.00

MONOCOTT DR — Total Cost for Street: $902,092.50

Survey Street	Start Street	End Street	Orientation	Cost
MONOCOTT DR	2704 MONOCOTT DR	N GRANADA DR	W	$116,430.00
MONOCOTT DR	DRIFTWOOD DR	PINEWOOD DR	E	$63,600.00
MONOCOTT DR	GRANADA DR	GREENWOOD DR	E	$249,545.00
MONOCOTT DR	GREENWOOD DR	DRIFTWOOD DR	E	$48,532.50
MONOCOTT DR	PINEWOOD DR	RIVERVIEW DR	E	$75,720.00
MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	W	$348,265.00

MONROE AVE — Total Cost for Street: $519,185.00

Survey Street	Start Street	End Street	Orientation	Cost
MONROE AVE	1770 MONROE AVE	PIERCE LN	W	$57,855.00
MONROE AVE	1818 MONROE AVE	1770 MONROE AVE	W	$52,700.00
MONROE AVE	1830 MONROE AVE	1830 MONROE AVE	W	$2,460.00
MONROE AVE	EISENHOWER LN	1830 MONROE AVE	W	$11,760.00
MONROE AVE	HOOVER AVE	TYLER LN	W	$126,375.00
MONROE AVE	PIERCE LN	EISENHOWER LN	E	$137,955.00
MONROE AVE	TYLER LN	HOOVER AVE	E	$130,080.00

MONTEREY DR — Total Cost for Street: $747,160.00

Survey Street	Start Street	End Street	Orientation	Cost
MONTEREY DR	GARY LN	MILANO LANE	W	$206,820.00
MONTEREY DR	HELENA WAY	GARY LN	E	$190,530.00
MONTEREY DR	MADRID LN	ST MONTELENA CT	E	$81,035.00
MONTEREY DR	ST MONTELENA CT	ALMOND AVE	E	$73,180.00
MONTEREY DR	ST. MONTELENA DR	GARY LN	W	$195,595.00

MONTEREY ST — Total Cost for Street: $967,759.00

Survey Street	Start Street	End Street	Orientation	Cost
MONTEREY ST	316 LEWIS ST	LEWIS ST	E	$28,974.00
MONTEREY ST	ALMOND AVE	ST. MONTELENA DR	W	$377,950.00
MONTEREY ST	AWAHNEE CT	WAWONA CT	W	$76,395.00
MONTEREY ST	CLOUD REST CT	HALF DOME CT	W	$74,580.00
MONTEREY ST	EL MONTE CT	CLOUD REST CT	W	$75,675.00
MONTEREY ST	HALF DOME CT	AWAHNEE CT	W	$79,080.00

MONTEREY ST	LEWIS ST	112 MONTEREY ST	W	$61,410.00
MONTEREY ST	PECAN AVE	HELENA WAY	E	$113,640.00
MONTEREY ST	WALNUT ST	EL MONTE CT	W	$53,820.00
MONTEREY ST	WAWONA CT	ALMOND AVE	W	$26,235.00

MOORE AVE

Total Cost for Street: **$126,070.00**

Survey Street	Start Street	End Street	Orientation	Cost
MOORE AVE	521 A ST	SUNRISE AVE	NW	$51,090.00
MOORE AVE	614 MOORE AVE	609 MOORE AVE	NW	$37,200.00
MOORE AVE	618 MOORE AVE	618 MOORE AVE	SE	$16,440.00
MOORE AVE	628 MOORE AVE	528 MOORE AVE	SE	$21,340.00

MUNRAS AVE

Total Cost for Street: **$455,815.00**

Survey Street	Start Street	End Street	Orientation	Cost
MUNRAS AVE	BERNARDI AVE	PECAN AVE	E	$96,260.00
MUNRAS AVE	PECAN AVE	SAN ANGELO AVE	W	$43,380.00
MUNRAS AVE	SAINT MARY AVE	SAN ANDREA AVE	E	$110,045.00
MUNRAS AVE	SAN ANDREA AVE	SAN MARCO AVE	W	$91,500.00
MUNRAS AVE	SAN ANGELO AVE	BERNARDI AVE	W	$91,440.00
MUNRAS AVE	SAN MARCO AVE	SAINT MARY AVE	W	$23,190.00

N A ST

Total Cost for Street: **$809,002.00**

Survey Street	Start Street	End Street	Orientation	Cost
N A ST	4TH ST	5TH ST	SW	$85,615.00
N A ST	5TH ST	E YOSEMITE AVE	SW	$185,145.00
N A ST	CENTRAL AVE	4TH ST	SW	$178,335.00
N A ST	E YOSEMITE AVE	5TH ST	NE	$283,122.00
N A ST	RIVERWALK DR	CENTRAL AVE	W	$76,785.00

N B ST

Total Cost for Street: **$667,210.00**

Survey Street	Start Street	End Street	Orientation	Cost
N B ST	374 CENTRAL AVE	CENTRAL AVE	W	$41,400.00
N B ST	3RD ST	4TH ST	SW	$112,900.00
N B ST	4TH ST	5TH ST	SW	$195,655.00
N B ST	5TH ST	E YOSEMITE AVE	SW	$160,445.00
N B ST	CENTRAL AVE	3RD ST	SW	$66,990.00
N B ST	E YOSEMITE AVE	5TH ST	NW	$89,820.00

N C ST

Total Cost for Street: **$687,118.00**

Survey Street	Start Street	End Street	Orientation	Cost
N C ST	2ND ST	3RD ST	SW	$57,765.00
N C ST	3RD ST	4TH ST	SW	$170,370.00
N C ST	4TH ST	5TH ST	SW	$152,115.00
N C ST	5TH ST	E YOSEMITE AVE	SW	$185,988.00
N C ST	CENTRAL AVE	2ND ST	SW	$47,380.00
N C ST	E YOSEMITE AVE	5TH ST	NE	$73,500.00

N D ST

Total Cost for Street: **$2,722,815.00**

Survey Street	Start Street	End Street	Orientation	Cost
N D ST	1132 N D ST	E CLEVELAND AVE	W	$159,138.00
N D ST	1327 N D ST	JAMES WAY	E	$25,200.00
N D ST	1ST ST	2ND ST	SW	$106,275.00
N D ST	2ND ST	3RD ST	SW	$209,535.00
N D ST	3RD ST	4TH ST	SW	$106,755.00
N D ST	4TH ST	5TH ST	SW	$141,885.00

N D ST	5TH ST	E YOSEMITE AVE	SW	$132,195.00
N D ST	ADELL ST	ASTI WAY	W	$87,483.00
N D ST	ASHLAN WAY	W SHERWOOD WAY	W	$155,328.00
N D ST	ASTI WAY	ASHLAN WAY	W	$148,020.00
N D ST	CENTRAL AVE	1ST ST	W	$12,120.00
N D ST	E CLEVELAND AVE	E RUSH ST	W	$156,780.00
N D ST	E LINCOLN AVE	W SOUTH ST	W	$208,450.00
N D ST	E RUSH ST	E LINCOLN AVE	W	$95,250.00
N D ST	E YOSEMITE AVE	5TH ST	NE	$90,080.00
N D ST	JAMES WAY	ASHLAN WAY	E	$62,556.00
N D ST	RIVERSIDE DR	W CENTRAL AVE	W	$208,035.00
N D ST	RUSH ST	E CLEVELAND AVE	E	$66,020.00
N D ST	W CENTRAL AVE	E RIVERSIDE DR	E	$47,010.00
N D ST	W SHERWOOD WAY	GREEN WAY	W	$188,280.00
N D ST	W SOUTH ST	RIVERSIDE DR	W	$316,420.00

N E ST

Total Cost for Street: **$627,378.00**

Survey Street	Start Street	End Street	Orientation	Cost
N E ST	1ST ST	CENTRAL AVE	NE	$53,655.00
N E ST	216 N E ST	E YOSEMITE AVE	SW	$116,630.00
N E ST	2ND ST	1ST ST	NE	$94,220.00
N E ST	314 N E ST	4TH ST	SW	$1,220.00
N E ST	3RD ST	2ND ST	NE	$46,030.00
N E ST	4TH ST	216 N E ST	SW	$128,300.00
N E ST	5TH ST	4TH ST	NE	$60,060.00
N E ST	CENTRAL AVE	100 N E ST	SW	$55,608.00
N E ST	E YOSEMITE AVE	5TH ST	NE	$71,655.00

N G ST

Total Cost for Street: **$1,060,425.00**

Survey Street	Start Street	End Street	Orientation	Cost
N G ST	4TH ST	W YOSEMITE AVE	SW	$289,280.00
N G ST	FIFTH ST	4TH ST	NE	$91,460.00
N G ST	W 1ST ST	W 2ND ST	SW	$116,945.00
N G ST	W 2ND ST	W 3RD ST	SW	$123,765.00
N G ST	W 3RD ST	W 4TH ST	SW	$90,095.00
N G ST	W CENTRAL AVE	200 N G ST	SW	$77,620.00
N G ST	W ROBERTS AVE	W 1ST ST	SW	$143,610.00
N G ST	W YOSEMITE AVE	FIFTH ST	NE	$127,650.00

N GATEWAY DR

Total Cost for Street: **$1,679,442.50**

Survey Street	Start Street	End Street	Orientation	Cost
N GATEWAY DR	1140 N GATEWAY DR	W CLEVELAND AVE	W	$300,258.00
N GATEWAY DR	211 N GATEWAY DR	4TH ST	NE	$68,715.00
N GATEWAY DR	3RD ST	4TH ST	SW	$223,505.00
N GATEWAY DR	400 N GATEWAY DR	3RD ST	SW	$23,472.00
N GATEWAY DR	4TH ST	FIFTH ST	SW	$141,590.00
N GATEWAY DR	709 N GATEWAY DR	625 N GATEWAY DR	NE	$48,185.00
N GATEWAY DR	E YOSEMITE AVE	101 N GATEWAY DR	NE	$40,608.00
N GATEWAY DR	FIFTH ST	W YOSEMITE AVE	SW	$385,770.00
N GATEWAY DR	W 1ST ST	W 2ND ST	SW	$88,159.50
N GATEWAY DR	W 2ND ST	424 N GATEWAY DR	SW	$23,415.00
N GATEWAY DR	W 3RD ST	W 2ND ST	NE	$97,935.00
N GATEWAY DR	W CENTRAL AVE	W ROBERTS AVE	SW	$141,610.00

N GATEWAY DR	W ROBERTS AVE	W 1ST ST	SW	$96,220.00

N GRANADA DR

Total Cost for Street: $3,825,605.00

Survey Street	Start Street	End Street	Orientation	Cost
N GRANADA DR	128 EAST LOOP	STEEPLE GATE	E	$308,805.00
N GRANADA DR	2026 N GRANADA DR	2026 N GRANADA DR	W	$102,240.00
N GRANADA DR	2130 N GRANADA DR	2026 N GRANADA DR	W	$284,415.00
N GRANADA DR	BALSAM CT	GREENWOOD DR	W	$115,260.00
N GRANADA DR	DEBORAH LN	PAMELA DR	W	$367,462.50
N GRANADA DR	DRIFTWOOD DR	BALSAM CT	W	$89,625.00
N GRANADA DR	GREENWOOD DR	SANDALWOOD DR	W	$46,560.00
N GRANADA DR	MONOCOTT DR	SUNSET AVE	W	$46,410.00
N GRANADA DR	N GRANADA DR	RIVERVIEW DR	W	$21,300.00
N GRANADA DR	PINEWOOD DR	DRIFTWOOD DR	W	$163,177.50
N GRANADA DR	RIVERVIEW DR	PINEWOOD DR	W	$80,910.00
N GRANADA DR	SANDALWOOD DR	MONOCOTT DR	W	$60,300.00
N GRANADA DR	STEEPLE GATE	W CLEVELAND AVE	E	$417,060.00
N GRANADA DR	SUNSET AVE	VALLEY WAY	E	$436,125.00
N GRANADA DR	VALLEY WAY	PINEWOOD DR	E	$100,170.00
N GRANADA DR	W CLEVELAND AVE	DEBORAH LN	W	$452,975.00
N GRANADA DR	W CLEVELAND DR	2130 N GRANADA DR	W	$732,810.00

N H ST

Total Cost for Street: $470,286.00

Survey Street	Start Street	End Street	Orientation	Cost
N H ST	425 N H ST	W 2ND ST	NE	$23,184.00
N H ST	W 1ST ST	W ROBERTS AVE	NE	$106,650.00
N H ST	W 2ND ST	W 1ST ST	NE	$76,662.00
N H ST	W 3RD ST	421 N H ST	NE	$69,384.00
N H ST	W 4TH ST	W 3RD ST	NE	$77,190.00
N H ST	W ROBERTS AVE	713 N H ST	NE	$117,216.00

N I ST

Total Cost for Street: $1,335,940.00

Survey Street	Start Street	End Street	Orientation	Cost
N I ST	137 PARK DR	W 2ND ST	SW	$79,877.50
N I ST	730 N I ST	W ROBERTS AVE	W	$162,975.00
N I ST	760 N I ST	760 N I ST	SE	$107,940.00
N I ST	FIFTH ST	FOURTH ST	NE	$119,340.00
N I ST	FOURTH ST	W 2ND ST	NE	$192,907.50
N I ST	W 2ND ST	FOURTH ST	SW	$464,190.00
N I ST	W CENTRAL AVE	PARKING LOT ENTRANCE	W	$96,300.00
N I ST	W YOSEMITE AVE	FIFTH ST	NE	$112,410.00

N J ST

Total Cost for Street: $621,258.00

Survey Street	Start Street	End Street	Orientation	Cost
N J ST	108 J ST	W YOSEMITE AVE	SW	$29,505.00
N J ST	5TH ST	120 N J ST	SW	$67,230.00
N J ST	6TH ST	7TH ST	SW	$95,649.00
N J ST	7TH ST	EIGHTH ST	SW	$165,544.00
N J ST	9TH ST	EIGHTH ST	NE	$82,848.00
N J ST	EIGHTH ST	9TH ST	SW	$84,967.00
N J ST	FOURTH ST	FOURTH ST	SE	$95,515.00

N K ST

Total Cost for Street: $948,610.00

Survey Street	Start Street	End Street	Orientation	Cost

N K ST	4TH ST	5TH ST	SW	$50,715.00
N K ST	517 N K ST	9TH ST	NE	$13,867.50
N K ST	5TH ST	W YOSEMITE AVE	SW	$74,754.00
N K ST	6TH ST	7TH ST	SW	$148,570.00
N K ST	7TH ST	EIGHTH ST	SW	$224,445.00
N K ST	9TH ST	EIGHTH ST	NE	$114,207.00
N K ST	EIGHTH ST	412 N K ST	SW	$166,755.00
N K ST	FIFTH ST	FOURTH ST	NW	$31,807.50
N K ST	W YOSEMITE AVE	6TH ST	SW	$123,489.00

N L ST

Total Cost for Street: **$1,654,148.50**

Survey Street	Start Street	End Street	Orientation	Cost
N L ST	4TH ST	5TH ST	SW	$60,400.00
N L ST	5TH ST	W YOSEMITE AVE	SW	$55,029.00
N L ST	6TH ST	OLIVE AVE	SW	$984,290.00
N L ST	7TH ST	6TH ST	NE	$60,083.00
N L ST	EIGHTH ST	7TH ST	NE	$103,479.00
N L ST	FIFTH ST	FOURTH ST	SE	$94,955.00
N L ST	OLIVE AVE	9TH ST	NE	$28,215.00
N L ST	W YOSEMITE AVE	6TH ST	SW	$267,697.50

N LAKE ST

Total Cost for Street: **$3,221,537.50**

Survey Street	Start Street	End Street	Orientation	Cost
N LAKE ST	1016 N LAKE ST	RUSH ST	W	$44,950.00
N LAKE ST	1804 N LAKE ST	ADELL ST	W	$37,515.00
N LAKE ST	1995 N LAKE ST	E ELLIS ST	E	$123,675.00
N LAKE ST	4TH ST	5TH ST	SW	$107,385.00
N LAKE ST	5TH ST	E YOSEMITE AVE	SW	$162,440.00
N LAKE ST	ADELL ST	ASHLAN WAY	W	$348,645.00
N LAKE ST	ASHLAN WAY	JAMES WAY	W	$208,530.00
N LAKE ST	CENTRAL AVE	RIVERSIDE DR	E	$152,736.00
N LAKE ST	DAULTON AVE	E LINCOLN AVE	N	$77,040.00
N LAKE ST	E ADELL ST	1995 N LAKE ST	E	$289,470.00
N LAKE ST	E CLARK ST	E KENNEDY ST	E	$82,360.00
N LAKE ST	E CLEVELAND AVE	1030 N LAKE ST	W	$127,475.00
N LAKE ST	E ELLIS ST	2001 N LAKE ST	E	$29,412.00
N LAKE ST	E KENNEDY ST	E ADELL ST	E	$81,315.00
N LAKE ST	E LINCOLN AVE	W SOUTH ST	W	$136,514.00
N LAKE ST	E RIVERSIDE DR	CENTRAL AVE	W	$143,365.50
N LAKE ST	E YOSEMITE AVE	5TH ST	NE	$88,240.00
N LAKE ST	GARFIELD AVE	GRANT AVE	E	$86,100.00
N LAKE ST	GRANT AVE	E CLEVELAND AVE	E	$41,680.00
N LAKE ST	GREEN WAY	E CLEVELAND AVE	W	$266,165.00
N LAKE ST	JAMES WAY	WESSMITH WAY	W	$64,980.00
N LAKE ST	RIVERSIDE DR	DAULTON AVE	E	$72,440.00
N LAKE ST	RUSH ST	E LINCOLN AVE	S	$78,170.00
N LAKE ST	W SHERWOOD WAY	GREEN WAY	W	$153,615.00
N LAKE ST	W SOUTH ST	E RIVERSIDE DR	W	$70,695.00
N LAKE ST	WESSMITH WAY	W SHERWOOD WAY	W	$146,625.00

N M ST

Total Cost for Street: **$446,365.00**

Survey Street	Start Street	End Street	Orientation	Cost
N M ST	206 N M ST	5TH ST	SW	$10,170.00

N M ST	4TH ST	210 N M ST	SW	$35,055.00
N M ST	5TH ST	W YOSEMITE AVE	SW	$112,640.00
N M ST	6TH ST	W YOSEMITE AVE	NE	$106,650.00
N M ST	W YOSEMITE AVE	6TH ST	SW	$181,850.00

N N ST

Total Cost for Street: **$1,034,630.50**

Survey Street	Start Street	End Street	Orientation	Cost
N N ST	200 L ST	6TH ST	NE	$327,880.00
N N ST	4TH ST	5TH ST	SW	$102,675.00
N N ST	5TH ST	213 N N ST	NE	$60,414.00
N N ST	6TH ST	7TH ST	SW	$195,361.50
N N ST	7TH ST	OLIVE AVE	NW	$83,270.00
N N ST	FIFTH ST	W YOSEMITE AVE	SW	$59,440.00
N N ST	OLIVE AVE	SEVENTH ST	NE	$83,400.00
N N ST	W YOSEMITE AVE	6TH ST	SW	$122,190.00

N O ST

Total Cost for Street: **$439,710.00**

Survey Street	Start Street	End Street	Orientation	Cost
N O ST	119 N O ST	5TH ST	NE	$34,435.00
N O ST	224 O ST	OLIVE AVE	NW	$22,400.00
N O ST	4TH ST	200 N O ST	SW	$52,890.00
N O ST	5TH ST	FOURTH ST	NE	$59,000.00
N O ST	6TH ST	204 O ST	SW	$77,220.00
N O ST	FIFTH ST	W YOSEMITE AVE	SW	$84,345.00
N O ST	SEVENTH ST	209 O ST	NE	$51,670.00
N O ST	W YOSEMITE AVE	6TH ST	SW	$57,750.00

N P ST

Total Cost for Street: **$147,915.00**

Survey Street	Start Street	End Street	Orientation	Cost
N P ST	219 N P ST	4TH ST	NE	$38,220.00
N P ST	5TH ST	W YOSEMITE AVE	SW	$67,695.00
N P ST	W YOSEMITE AVE	107 N P ST	NE	$42,000.00

N PARK DR

Total Cost for Street: **$29,535.00**

Survey Street	Start Street	End Street	Orientation	Cost
N PARK DR	155 N PARK DR	153 N PARK DR	N	$29,535.00

N Q ST

Total Cost for Street: **$93,330.00**

Survey Street	Start Street	End Street	Orientation	Cost
N Q ST	108 N Q ST	W YOSEMITE AVE	SW	$22,275.00
N Q ST	131 N Q ST	5TH ST	NE	$16,935.00
N Q ST	223 N Q ST	FOURTH ST	NE	$2,940.00
N Q ST	5TH ST	1210 N Q ST	SW	$10,020.00
N Q ST	W YOSEMITE AVE	111 N Q ST	NE	$41,160.00

N SCHNOOR AVE

Total Cost for Street: **$3,602,210.00**

Survey Street	Start Street	End Street	Orientation	Cost
N SCHNOOR AVE	1595 ARBELLA LN	DUTRA WAY	W	$402,420.00
N SCHNOOR AVE	1663 N SCHNOOR AVE	2220 N SCHNOOR AVE	E	$73,515.00
N SCHNOOR AVE	2000 N SCHNOOR AVE	IRONWOOD WAY	W	$52,260.00
N SCHNOOR AVE	2155 N SCHNOOR AVE	KENNEDY ST	E	$190,850.00
N SCHNOOR AVE	2160 N SCHNOOR AVE	2160 N SCHNOOR AVE	W	$5,880.00
N SCHNOOR AVE	2190 N SCHNOOR AVE	2190 N SCHNOOR AVE	W	$105,555.00
N SCHNOOR AVE	2210 N SCHNOOR AVE	2210 N SCHNOOR AVE	W	$67,275.00
N SCHNOOR AVE	2263 N SCHNOOR AVE	2263 N SCHNOOR AVE	E	$123,495.00

N SCHNOOR AVE	2290 W CLEVELAND AVE	W CLEVELAND AVE	E	$76,515.00
N SCHNOOR AVE	2295 N SCHNOOR AVE	2295 N SCHNOOR AVE	E	$50,040.00
N SCHNOOR AVE	2330 N SCHNOOR AVE	2330 N SCHNOOR AVE	W	$113,610.00
N SCHNOOR AVE	829 N SCHNOOR AVE	UNIVERSITY AVE	E	$59,137.50
N SCHNOOR AVE	ALDERWOOD CT	BEECHWOOD WAY	W	$100,260.00
N SCHNOOR AVE	BEECHWOOD WAY	W CLEVELAND AVE	W	$111,150.00
N SCHNOOR AVE	DUTRA WAY	TREVOR WAY	W	$318,885.00
N SCHNOOR AVE	FILLMORE AVE	JEFFERSON AVE	E	$69,532.50
N SCHNOOR AVE	FOXGLOVE WAY	2000 N SCHNOOR AVE	W	$207,780.00
N SCHNOOR AVE	IRONWOOD WAY	ALDERWOOD CT	W	$95,055.00
N SCHNOOR AVE	JEFFERSON AVE	DUTRA WAY	E	$526,155.00
N SCHNOOR AVE	KENNEDY ST	2140 KENNEDY ST	W	$57,555.00
N SCHNOOR AVE	RIVERVIEW DR	UNIVERSITY AVE	W	$169,635.00
N SCHNOOR AVE	TREVOR WAY	RIVERVIEW DR	W	$403,815.00
N SCHNOOR AVE	UNIVERSITY AVE	873 ROYAL DR	W	$160,440.00
N SCHNOOR AVE	W CLEVELAND AVE	2300 W CLEVELAND AVE	W	$61,395.00

N WESTBERRY BLV

Total Cost for Street: **$485,325.00**

Survey Street	Start Street	End Street	Orientation	Cost
N WESTBERRY BLV	FAIRFIELD WAY	CURB RAMP	W	$198,690.00
N WESTBERRY BLV	FAIRWAY AVE	FAIRFIELD WAY	W	$286,635.00

N WESTBERRY BLVD

Total Cost for Street: **$50,580.00**

Survey Street	Start Street	End Street	Orientation	Cost
N WESTBERRY BLVD	SALANO CT	N WESTBERRY BLVD	W	$50,580.00

NAPOLI ST

Total Cost for Street: **$141,255.00**

Survey Street	Start Street	End Street	Orientation	Cost
NAPOLI ST	MILANO LANE	TRIVISO AVE	E	$74,670.00
NAPOLI ST	TRIVISO AVE	MILANO LANE	W	$66,585.00

NATIONAL AVE

Total Cost for Street: **$796,745.00**

Survey Street	Start Street	End Street	Orientation	Cost
NATIONAL AVE	1822 NATIONAL AVE	WILLIAMS AVE	S	$442,960.00
NATIONAL AVE	500 NATIONAL AVE	509 HEATHERWOOD DR	N	$23,955.00
NATIONAL AVE	504 VALLEY WAY	VALLEY WAY	S	$30,300.00
NATIONAL AVE	HEATHERWOOD DR	2511 NATIONAL AVE	N	$76,055.00
NATIONAL AVE	SCHNOOR AVE	1908 NATIONAL AVE	S	$149,580.00
NATIONAL AVE	VALLEY WAY	424 NATIONAL AVE	S	$73,895.00

NAVEL AVE

Total Cost for Street: **$294,159.00**

Survey Street	Start Street	End Street	Orientation	Cost
NAVEL AVE	1027 NAVEL AVE	VALENCIA AVE	N	$47,175.00
NAVEL AVE	1028 NAVEL AVE	LEMON AVE	S	$64,555.00
NAVEL AVE	936 NAVAL AVE	VALENCIA AVE	S	$26,520.00
NAVEL AVE	LEMON AVE	1039 NAVAL AVE	N	$56,340.00
NAVEL AVE	TANGERINE AVE	924 NAVAL AVE	S	$8,520.00
NAVEL AVE	VALENCIA AVE	1028 NAVEL AVE	S	$91,049.00

NEBRASKA AVE

Total Cost for Street: **$32,438.00**

Survey Street	Start Street	End Street	Orientation	Cost
NEBRASKA AVE	W SHERWOOD WAY	1220 NEBRASKA AVE	W	$32,438.00

NEBRASKA ST

Total Cost for Street: **$137,389.00**

Survey Street	Start Street	End Street	Orientation	Cost

NEBRASKA ST	708 NEBRASKA ST	RIVERSIDE DR	W	$63,400.00
NEBRASKA ST	711 NEBRASKA ST	711 NEBRASKA ST	E	$18,819.00
NEBRASKA ST	718 NEBRASKA ST	724 NEBRASKA ST	W	$6,915.00
NEBRASKA ST	721 NEBRASKA ST	727 NEBRASKA ST	E	$36,555.00
NEBRASKA ST	W SOUTH ST	404 NEBRASKA ST	W	$11,700.00

NECTARINE ST — *Total Cost for Street:* $210,132.00

Survey Street	Start Street	End Street	Orientation	Cost
NECTARINE ST	KNOX ST	PEACH ST	N	$57,204.00
NECTARINE ST	PEACH ST	KNOX ST	S	$152,928.00

NEPLUS WY — *Total Cost for Street:* $38,475.00

Survey Street	Start Street	End Street	Orientation	Cost
NEPLUS WY	DRAKE ST	KNOX ST	S	$20,355.00
NEPLUS WY	KNOX ST	DRAKE ST	N	$18,120.00

NICOLA WAY — *Total Cost for Street:* $131,118.00

Survey Street	Start Street	End Street	Orientation	Cost
NICOLA WAY	NOREEN WAY	W SHERWOOD WAY	W	$66,723.00
NICOLA WAY	W SHERWOOD WAY	NOREEN WAY	E	$64,395.00

NINTH ST — *Total Cost for Street:* $429,305.00

Survey Street	Start Street	End Street	Orientation	Cost
NINTH ST	429 S J ST	S J ST	NW	$4,535.00
NINTH ST	500 NINTH ST	S I ST	SE	$242,208.00
NINTH ST	S I ST	509 S I ST	SE	$76,752.00
NINTH ST	S J ST	S K ST	NW	$50,010.00
NINTH ST	S K ST	501 9TH ST	SE	$55,800.00

NOBLE ST — *Total Cost for Street:* $283,509.00

Survey Street	Start Street	End Street	Orientation	Cost
NOBLE ST	421 NOBLE ST	421 NOBLE ST	E	$39,540.00
NOBLE ST	690 NOBLE ST	GILL AVE	W	$243,969.00

NOREEN WAY — *Total Cost for Street:* $621,374.00

Survey Street	Start Street	End Street	Orientation	Cost
NOREEN WAY	1417 NOREEN WAY	1419 NOREEN WAY	E	$14,592.00
NOREEN WAY	1421 NOREEN WAY	ASTI WAY	E	$78,039.00
NOREEN WAY	1619 NOREEN WAY	LYNN WAY	E	$3,720.00
NOREEN WAY	ASHLAN WAY	RENEE WAY	W	$90,051.00
NOREEN WAY	ASTI WAY	1619 NOREEN WAY	E	$33,300.00
NOREEN WAY	LUCIA WAY	NICOLA WAY	S	$37,011.00
NOREEN WAY	LYNN WAY	ASHLAN WAY	W	$157,979.00
NOREEN WAY	NICOLA WAY	NOREEN WAY	S	$22,908.00
NOREEN WAY	NOREEN WAY	LUCIA WAY	N	$136,710.00
NOREEN WAY	RENEE WAY	NOREEN WAY	W	$47,064.00

OAK ST — *Total Cost for Street:* $750,299.00

Survey Street	Start Street	End Street	Orientation	Cost
OAK ST	100 OAK ST	S WOLFTRAP ST	S	$97,860.00
OAK ST	1400 HOWARD RD	ROTAN AVE	N	$21,339.00
OAK ST	201 PINE ST	CYPRESS ST	S	$21,039.00
OAK ST	CYPRESS ST	PARK ST	S	$270,096.00
OAK ST	MAKENNA DR	85 OAK ST	N	$36,360.00
OAK ST	PINE ST	201 PARK ST	S	$56,160.00

OAK ST	S WOLFTRAP ST	ST TROPEZ DR	S	$172,505.00
OAK ST	ST TROPEZ DR	MAKENNA DR	N	$74,940.00

OAKRIDGE DR

Total Cost for Street: **$166,280.00**

Survey Street	Start Street	End Street	Orientation	Cost
OAKRIDGE DR	ALMOND AVE	QUADY LN	W	$83,685.00
OAKRIDGE DR	DEERWOOD DR	ALMOND AVE	W	$64,400.00
OAKRIDGE DR	QUADY LN	ALMOND AVE	E	$18,195.00

OLIVE AVE

Total Cost for Street: **$5,230,555.50**

Survey Street	Start Street	End Street	Orientation	Cost
OLIVE AVE	1300 YOSEMITE AVE	CYPRESS ST	S	$51,948.00
OLIVE AVE	909 S GATEWAY DR	S GATEWAY DR	N	$60,360.00
OLIVE AVE	COYOTE LN	STADIUM RD	S	$552,384.00
OLIVE AVE	CYPRESS ST	1212 OLIVE AVE	S	$26,160.00
OLIVE AVE	DON MIGUEL ST	S D ST	N	$60,555.00
OLIVE AVE	FREEWAY EXIT	S I ST	N	$32,460.00
OLIVE AVE	GROVE ST	PARKING LOT ENTRANCE	S	$149,715.00
OLIVE AVE	KNOX ST	TOZER ST	S	$663,780.00
OLIVE AVE	MADERA AVE	FREEWAY EXIT	N	$31,815.00
OLIVE AVE	MARIPOSA ST	KNOX ST	N	$207,570.00
OLIVE AVE	MARTIN ST	MADERA AVE	S	$253,650.00
OLIVE AVE	MONTEREY ST	MARTIN ST	S	$88,340.00
OLIVE AVE	PARK ST	STREET END	S	$36,920.00
OLIVE AVE	PINE ST	1300 YOSEMITE AVE	S	$62,437.50
OLIVE AVE	ROOSEVELT AVE	WALLACE AVE	S	$166,020.00
OLIVE AVE	S G ST	S GATEWAY DR	S	$198,280.00
OLIVE AVE	S GATEWAY DR	822 S GATEWAY DR	N	$57,360.00
OLIVE AVE	S I ST	S K ST	N	$282,096.00
OLIVE AVE	S K ST	S L ST	N	$117,930.00
OLIVE AVE	S L ST	S N ST	N	$386,490.00
OLIVE AVE	S N ST	S P ST	N	$392,040.00
OLIVE AVE	S P ST	SIXTH ST	N	$28,200.00
OLIVE AVE	S Q ST	HOWARD RD	N	$80,200.00
OLIVE AVE	SANTA BONITA ST	MONTEREY ST	S	$45,440.00
OLIVE AVE	SANTA CRUZ ST	SANTA BONITA ST	S	$66,040.00
OLIVE AVE	SIXTH ST	S Q ST	NE	$180,095.00
OLIVE AVE	STADIUM RD	SANTA CRUZ ST	S	$260,140.00
OLIVE AVE	STREET END	GROVE ST	S	$61,080.00
OLIVE AVE	TOZER ST	MARIPOSA ST	N	$260,895.00
OLIVE AVE	W YOSEMITE AVE	PINE ST	N	$87,300.00
OLIVE AVE	WALLACE AVE	KNOX ST	S	$282,855.00

ORANGE TREE CT

Total Cost for Street: **$55,460.00**

Survey Street	Start Street	End Street	Orientation	Cost
ORANGE TREE CT	2775 ORANGE TREE CT	PEACH TREE DR	N	$25,640.00
ORANGE TREE CT	PEACH TREE DR	2790 ORANGE TREE CT	S	$29,820.00

ORANGE TREE DR

Total Cost for Street: **$52,830.00**

Survey Street	Start Street	End Street	Orientation	Cost
ORANGE TREE DR	2646 ORANGE TREE DR	TOSCHI DR	S	$8,040.00
ORANGE TREE DR	BERRY DR	2660 ORANGE TREE DR	S	$18,780.00
ORANGE TREE DR	TOSCHI DR	BERRY DR	N	$26,010.00

ORCHARD AVE — Total Cost for Street: $634,002.50

Survey Street	Start Street	End Street	Orientation	Cost
ORCHARD AVE	1790 ORCHARD AVE	UNIVERSITY AVE	E	$25,957.50
ORCHARD AVE	FILLMORE AVE	UNIVERSITY AVE	W	$41,475.00
ORCHARD AVE	JEFFERSON AVE	FILLMORE AVE	W	$115,920.00
ORCHARD AVE	RIVERVIEW DR	W CENTRAL AVE	W	$13,197.00
ORCHARD AVE	SUNSET AVE	1803 ORCHARD AVE	E	$95,415.00
ORCHARD AVE	UNIVERSITY AVE	1802 ORCHARD AVE	W	$130,635.00
ORCHARD AVE	VENTURI AVE	SUNSET AVE	W	$131,360.00
ORCHARD AVE	W CENTRAL AVE	JEFFERSON AVE	W	$80,043.00

ORCHARD HILL DR — Total Cost for Street: $329,845.00

Survey Street	Start Street	End Street	Orientation	Cost
ORCHARD HILL DR	BENT OAK TR	COLIMA AVE	N	$88,800.00
ORCHARD HILL DR	BOLINAS WAY	IVY GLEN DR	W	$81,820.00
ORCHARD HILL DR	COLIMA AVE	BOLINAS WAY	S	$60,240.00
ORCHARD HILL DR	DIAMANTE LN	IVY GLEN DR	W	$98,985.00

ORTEGA DR — Total Cost for Street: $43,455.00

Survey Street	Start Street	End Street	Orientation	Cost
ORTEGA DR	KNOX RD	RANCHO MIRAGE RD	S	$21,675.00
ORTEGA DR	RANCHO MIRAGE RD	KNOX RD	N	$21,780.00

OSO DR — Total Cost for Street: $528,050.00

Survey Street	Start Street	End Street	Orientation	Cost
OSO DR	KNOX ST	MARIPOSA ST	S	$159,450.00
OSO DR	LOS CERRITOS WAY	KNOX ST	S	$126,695.00
OSO DR	MARIPOSA ST	LOS CERRITOS WAY	N	$241,905.00

OWENS ST — Total Cost for Street: $785,752.00

Survey Street	Start Street	End Street	Orientation	Cost
OWENS ST	1116 OWENS ST	W CLEVELAND AVE	W	$65,665.00
OWENS ST	301 HARDING AVE	HARDING AVE	W	$42,939.00
OWENS ST	E CLEVELAND AVE	W SHERWOOD WAY	E	$130,385.00
OWENS ST	SHARON BVD	WILSON AVE	E	$177,830.00
OWENS ST	W CLARK ST	314 OWENS ST	W	$180,435.00
OWENS ST	W SHERWOOD WAY	1120 OWENS ST	W	$120,190.00
OWENS ST	WILSON AVE	E CLEVELAND AVE	E	$68,308.00

PACIFIC CT — Total Cost for Street: $179,805.00

Survey Street	Start Street	End Street	Orientation	Cost
PACIFIC CT	MAINBERRY DR	MAINBERRY DR	S/E/	$179,805.00

PADRE ST — Total Cost for Street: $105,660.00

Survey Street	Start Street	End Street	Orientation	Cost
PADRE ST	DRAKE ST	SOLANO ST	N	$31,890.00
PADRE ST	PEERLESS ST	DRAKE ST	S	$37,995.00
PADRE ST	SOLANO ST	PEERLESS ST	S	$35,775.00

PAINTBRUSH DR — Total Cost for Street: $525,850.00

Survey Street	Start Street	End Street	Orientation	Cost
PAINTBRUSH DR	DOUBLE TREE WAY	FAIRMONT CT	E	$90,480.00
PAINTBRUSH DR	EASY CT	LOVE CT	E	$86,415.00
PAINTBRUSH DR	FAIRMONT CT	EASY CT	E	$2,280.00
PAINTBRUSH DR	LOVE CT	RIVERVIEW DR	E	$108,600.00

PAINTBRUSH DR	RIVERVIEW DR	WINDSOX CT	W	$34,485.00
PAINTBRUSH DR	TRAGON ST	DOUBLE TREE WAY	W	$43,935.00
PAINTBRUSH DR	WINDSOX CT	TRAGON ST	W	$159,655.00

PAMELA DR

Total Cost for Street: **$643,345.00**

Survey Street	Start Street	End Street	Orientation	Cost
PAMELA DR	DE ANN COVE	STEVEN LANE	N	$52,980.00
PAMELA DR	DEBORAH LN	TAYLOR LANE	N	$58,425.00
PAMELA DR	GRANADA DR	DEBORAH LN	N	$27,120.00
PAMELA DR	HILLSBORO AVE	STEVEN LANE	S	$59,295.00
PAMELA DR	SHELLEY COVE	DE ANN COVE	N	$57,855.00
PAMELA DR	STEVEN LANE	GRANADA DR	S	$320,770.00
PAMELA DR	TAYLOR LANE	SHELLEY COVE	N	$66,900.00

PAPAYA ST

Total Cost for Street: **$274,527.00**

Survey Street	Start Street	End Street	Orientation	Cost
PAPAYA ST	863 PAPAYA ST	906 PAPAYA ST	SW	$37,111.50
PAPAYA ST	897 PAPAYA ST	E ALMOND AVE	NE	$77,670.00
PAPAYA ST	916 PAPAYA ST	GRAPE ST	SW	$78,475.50
PAPAYA ST	E ALMOND AVE	826 PAPAYA ST	SW	$12,528.00
PAPAYA ST	GRAPE ST	907 PAPAYA ST	NE	$68,742.00

PARK ST

Total Cost for Street: **$14,340.00**

Survey Street	Start Street	End Street	Orientation	Cost
PARK ST	OAK ST	200 PARK ST	W	$14,340.00

PARKWOOD AVE

Total Cost for Street: **$421,485.00**

Survey Street	Start Street	End Street	Orientation	Cost
PARKWOOD AVE	1649 LEMON AVE	LEMON AVE	N	$34,860.00
PARKWOOD AVE	1692 TANGERINE AVE	TANGERINE AVE	S	$34,680.00
PARKWOOD AVE	LEMON AVE	1673 PARKWOOD AVE	S	$112,650.00
PARKWOOD AVE	TANGERINE AVE	VALENCIA AVE	S	$76,800.00
PARKWOOD AVE	VALENCIA AVE	LEMON AVE	S	$162,495.00

PASEO DEL MAR PRKW

Total Cost for Street: **$441,625.00**

Survey Street	Start Street	End Street	Orientation	Cost
PASEO DEL MAR PRKW	RANCHO MIRAGE RD	SAN GABRIEL DR	S	$225,350.00
PASEO DEL MAR PRKW	SAN GABRIEL DR	RANCHO MIRAGE RD	N	$216,275.00

PAUL AVE

Total Cost for Street: **$30,495.00**

Survey Street	Start Street	End Street	Orientation	Cost
PAUL AVE	1828 PAUL AVE	SUNSET AVE	E	$30,495.00

PEACH CT

Total Cost for Street: **$162,139.50**

Survey Street	Start Street	End Street	Orientation	Cost
PEACH CT	1271 PEACH CT	PEACH ST	N	$57,037.50
PEACH CT	PEACH ST	1271 PEACH CT	S/E/	$105,102.00

PEACH ST

Total Cost for Street: **$201,024.00**

Survey Street	Start Street	End Street	Orientation	Cost
PEACH ST	CHERRY ST	NECTARINE ST	W	$106,834.50
PEACH ST	NECTARINE ST	PEACH CT	NE	$40,405.50
PEACH ST	PEACH CT	CHERRY ST	E	$53,784.00

PEACH TREE DR

Total Cost for Street: **$302,355.00**

Survey Street	Start Street	End Street	Orientation	Cost

PEACH TREE DR	APPLE TREE CT	PEANUT CT	E	$72,075.00
PEACH TREE DR	CHERRY TREE DR	ORANGE TREE CT	E	$80,820.00
PEACH TREE DR	ORANGE TREE CT	APPLE TREE CT	E	$70,620.00
PEACH TREE DR	PEANUT CT	PEAR TREE DR	E	$78,840.00

PEANUT CT

Total Cost for Street: **$51,775.00**

Survey Street	Start Street	End Street	Orientation	Cost
PEANUT CT	PEACH TREE DR	PEACH TREE DR	S/E/	$51,775.00

PEANUT DR

Total Cost for Street: **$109,955.00**

Survey Street	Start Street	End Street	Orientation	Cost
PEANUT DR	BERRY DR	TOSCHI DR	S	$53,195.00
PEANUT DR	TOSCHI DR	BERRY DR	N	$56,760.00

PEAR CT

Total Cost for Street: **$18,288.00**

Survey Street	Start Street	End Street	Orientation	Cost
PEAR CT	845 PEAR CT	PEAR ST	NW	$4,536.00
PEAR CT	PEAR ST	855 PEAR CT	S/E/	$13,752.00

PEAR ST

Total Cost for Street: **$497,047.50**

Survey Street	Start Street	End Street	Orientation	Cost
PEAR ST	814 PEAR ST	904 PEAR ST	SW	$64,579.50
PEAR ST	914 PEAR ST	KIWI ST	SW	$43,956.00
PEAR ST	APPLE ST	E ALMOND AVE	W	$99,864.00
PEAR ST	E ALMOND AVE	814 PEAR ST	SW	$45,913.50
PEAR ST	KIWI ST	PEAR CT	NE	$89,946.00
PEAR ST	MADARIN ST	APPLE ST	E	$64,147.50
PEAR ST	PEAR CT	E ALMOND AVE	NE	$88,641.00

PEAR TREE DR

Total Cost for Street: **$283,175.00**

Survey Street	Start Street	End Street	Orientation	Cost
PEAR TREE DR	BERRY DR	TOSCHI DR	S	$55,980.00
PEAR TREE DR	HAZELNUT DR	LEMON TREE DR	S	$80,160.00
PEAR TREE DR	LEMON TREE DR	HAZELNUT DR	N	$52,575.00
PEAR TREE DR	PEACH TREE DR	LEMON TREE DR	S	$25,560.00
PEAR TREE DR	TOSCHI DR	BERRY DR	N	$68,900.00

PECAN AVE

Total Cost for Street: **$2,063,679.50**

Survey Street	Start Street	End Street	Orientation	Cost
PECAN AVE	1150 PECAN AVE	1150 PECAN AVE	S	$207,357.00
PECAN AVE	1440 MADERA AVE	COLOMBARD DR	N	$56,880.00
PECAN AVE	705 PECAN AVE	705 PECAN AVE	N	$114,780.00
PECAN AVE	804 MORRIS LANE	WATT ST	S	$299,287.50
PECAN AVE	BARNETT WAY	RAYMOND THOMAS ST	N	$134,820.00
PECAN AVE	COLOMBARD DR	SENECA DR	N	$57,900.00
PECAN AVE	CONCORD CT	MONTEREY ST	N	$59,040.00
PECAN AVE	DRIVEWAY	VICTORY LANE	N	$207,960.00
PECAN AVE	MADERA AVE	PARKING LOT ENTRANCE	N	$49,850.00
PECAN AVE	MUNRAS AVE	1501 MUNRAS AVE	S	$23,715.00
PECAN AVE	PINE ST	DRIVEWAY	N	$70,185.00
PECAN AVE	RAYMOND THOMAS ST	VALENCIA AVE	S	$124,440.00
PECAN AVE	SENECA DR	CONCORD CT	N	$66,780.00
PECAN AVE	STADIUM RD	MUNRAS AVE	S	$345,090.00
PECAN AVE	VALENCIA AVE	1097 PECAN AVE	S	$150,390.00
PECAN AVE	VICTORY LANE	DRIVEWAY	N	$95,205.00

PEERLESS ST — Total Cost for Street: $119,605.00

Survey Street	Start Street	End Street	Orientation	Cost
PEERLESS ST	PADRE ST	SAURET ST	W	$48,910.00
PEERLESS ST	SAURET ST	PADRE ST	E	$70,695.00

PENNY WAY — Total Cost for Street: $276,615.00

Survey Street	Start Street	End Street	Orientation	Cost
PENNY WAY	FAIRFIELD WAY	FAIRWAY AVE	E	$137,640.00
PENNY WAY	FAIRWAY AVE	FAIRFIELD WAY	W	$138,975.00

PERCY ST — Total Cost for Street: $133,779.00

Survey Street	Start Street	End Street	Orientation	Cost
PERCY ST	270 PERCY ST	SANTA FE ST	NW	$6,309.00
PERCY ST	CLINTON ST	301 PERCY ST	NE	$52,470.00
PERCY ST	SANTA FE ST	CLINTON ST	SW	$75,000.00

PERKINS AVE — Total Cost for Street: $263,109.00

Survey Street	Start Street	End Street	Orientation	Cost
PERKINS AVE	1005 PERKINS AVE	VALENCIA AVE	N	$6,240.00
PERKINS AVE	1030 PERKINS AVE	LEMON AVE	S	$59,955.00
PERKINS AVE	962 PERKINS AVE	VALENCIA AVE	S	$16,515.00
PERKINS AVE	LEMON AVE	VALENCIA AVE	N	$97,185.00
PERKINS AVE	TANGERINE AVE	950 PERKINS AVE	S	$38,520.00
PERKINS AVE	VALENCIA AVE	TANGERINE AVE	N	$44,694.00

PERKINS RD — Total Cost for Street: $29,600.00

Survey Street	Start Street	End Street	Orientation	Cost
PERKINS RD	VALENCIA AVE	1030 PERKINS RD	S	$29,600.00

PERSIMMON ST — Total Cost for Street: $140,121.00

Survey Street	Start Street	End Street	Orientation	Cost
PERSIMMON ST	COCONUT ST	POMEGRANATE ST	E	$51,093.00
PERSIMMON ST	POMEGRANATE ST	COCONUT ST	W	$89,028.00

PETITE AVE — Total Cost for Street: $175,595.00

Survey Street	Start Street	End Street	Orientation	Cost
PETITE AVE	CHIANTI AVE	RHINE CT	E	$12,555.00
PETITE AVE	GAMAY AVE	MERLOT AVE	W	$47,450.00
PETITE AVE	MERLOT AVE	CHIANTI AVE	W	$44,175.00
PETITE AVE	PETITE CT	GAMAY AVE	E	$50,385.00
PETITE AVE	RHINE CT	MERLOT AVE	E	$21,030.00

PETITE CT — Total Cost for Street: $56,130.00

Survey Street	Start Street	End Street	Orientation	Cost
PETITE CT	PETITE AVE	PETITE AVE	S/E/	$56,130.00

PHILIP ST — Total Cost for Street: $361,568.00

Survey Street	Start Street	End Street	Orientation	Cost
PHILIP ST	E CLEVELAND AVE	W SHERWOOD WAY	E	$176,172.00
PHILIP ST	W SHERWOOD WAY	E CLEVELAND AVE	W	$185,396.00

PIERCE LN — Total Cost for Street: $415,165.00

Survey Street	Start Street	End Street	Orientation	Cost
PIERCE LN	COOLIDGE ST	MONROE AVE	N	$64,320.00
PIERCE LN	MADISON DR	TRUMAN DR	S	$193,450.00
PIERCE LN	MONROE AVE	MADISON DR	N	$76,935.00

PIERCE LN	TRUMAN DR	COOLIDGE ST	N	$80,460.00

PINE ST

Total Cost for Street: **$1,345,060.00**

Survey Street	Start Street	End Street	Orientation	Cost
PINE ST	1300 YOSEMITE AVE	OLIVE AVE	E	$152,928.00
PINE ST	325 PINE ST	MAPLE ST	E	$135,255.00
PINE ST	467 PINE ST	455 PINE ST	E	$31,915.00
PINE ST	FOURTH ST	JENNINGS ST	E	$13,395.00
PINE ST	GILL AVE	467 PINE ST	E	$168,625.00
PINE ST	HOWARD RD	OAK ST	W	$141,675.00
PINE ST	INDEPENDENCE DRIVE	PECAN AVE	W	$262,320.00
PINE ST	MAPLE ST	OAK ST	E	$149,655.00
PINE ST	OAK ST	127 PINE ST	E	$49,572.00
PINE ST	PECAN AVE	INDEPENDENCE DRIVE	E	$239,720.00

PINEWOOD CT

Total Cost for Street: **$52,300.00**

Survey Street	Start Street	End Street	Orientation	Cost
PINEWOOD CT	920 PINEWOOD CT	PINEWOOD DR	S/E	$18,120.00
PINEWOOD CT	PINEWOOD DR	920 PINEWOOD CT	W	$34,180.00

PINEWOOD DR

Total Cost for Street: **$725,082.50**

Survey Street	Start Street	End Street	Orientation	Cost
PINEWOOD DR	GRANADA DR	PINEWOOD CT	S	$51,780.00
PINEWOOD DR	MONOCOTT DR	N GRANADA DR	S	$205,637.50
PINEWOOD DR	N GRANADA DR	MONOCOTT DR	N	$250,405.00
PINEWOOD DR	PINEWOOD CT	VALLEY WAY	S	$123,960.00
PINEWOOD DR	VALLEY WAY	PINEWOOD CT	N	$93,300.00

PLUMAS ST

Total Cost for Street: **$851,385.00**

Survey Street	Start Street	End Street	Orientation	Cost
PLUMAS ST	160 PLUMAS ST	S DOUBLE TREE WAY	S	$39,360.00
PLUMAS ST	30 PLUMAS ST	DWYER AVE	N	$149,685.00
PLUMAS ST	3043 PLUMAS ST	3085 PLUMAS ST	N	$80,580.00
PLUMAS ST	GRANADA DR	ST TROPEZ DR	N	$271,425.00
PLUMAS ST	MAKENNA DR	ST TROPEZ DR	S	$95,020.00
PLUMAS ST	S DOUBLE TREE WAY	S WOLFTRAP ST	S	$92,700.00
PLUMAS ST	S WOLFTRAP ST	3029 PLUMAS ST	N	$50,535.00
PLUMAS ST	ST TROPEZ DR	MAKENNA DR	N	$72,080.00

PLUMAS STREET

Total Cost for Street: **$175,025.00**

Survey Street	Start Street	End Street	Orientation	Cost
PLUMAS STREET	BERRY DRIVE	GRANADA DR	S	$101,810.00
PLUMAS STREET	ST TROPEZ DR	BERRY DRIVE	S	$73,215.00

PLUMWOOD WAY

Total Cost for Street: **$327,134.00**

Survey Street	Start Street	End Street	Orientation	Cost
PLUMWOOD WAY	ASPEN LN	SUNDANCE LN	N	$186,995.00
PLUMWOOD WAY	SUNDANCE LN	ASPEN LN	S	$140,139.00

PODRES LN

Total Cost for Street: **$131,700.00**

Survey Street	Start Street	End Street	Orientation	Cost
PODRES LN	DRYSDALE WAY	LILLY ST	NW	$54,120.00
PODRES LN	LILLY ST	DRYSDALE WAY	SE	$77,580.00

POINT SUR DR

Total Cost for Street: **$174,180.00**

Survey Street	Start Street	End Street	Orientation	Cost

POINT SUR DR	ASILOMAR DR	SANTA LUCIA DR	S	$75,900.00
POINT SUR DR	SANTA LUCIA DR	ASILOMAR DR	N	$98,280.00

POLK AVE — Total Cost for Street: $83,760.00

Survey Street	Start Street	End Street	Orientation	Cost
POLK AVE	CHAPIN ST	TRUMAN DR	N	$41,640.00
POLK AVE	TRUMAN DR	CHAPIN ST	S	$42,120.00

POMEGRANATE ST — Total Cost for Street: $152,257.50

Survey Street	Start Street	End Street	Orientation	Cost
POMEGRANATE ST	HACIENDA ST	KNOX RD	N	$70,002.00
POMEGRANATE ST	KNOX ST	PERSIMMON ST	S	$19,008.00
POMEGRANATE ST	PERSIMMON ST	HACIENDA ST	S	$63,247.50

POMPEI ST — Total Cost for Street: $74,035.00

Survey Street	Start Street	End Street	Orientation	Cost
POMPEI ST	MILANO LANE	TRIVISO AVE	E	$50,410.00
POMPEI ST	TRIVISO AVE	MILANO LANE	W	$23,625.00

POPOLI WAY — Total Cost for Street: $111,393.00

Survey Street	Start Street	End Street	Orientation	Cost
POPOLI WAY	1420 POPOLI WAY	ASHLAN WAY	W	$48,955.00
POPOLI WAY	ASHLAN WAY	GABRIEL WAY	E	$50,918.00
POPOLI WAY	GABRIEL WAY	1500 POPOLI WAY	W	$11,520.00

PRINCETON AVE — Total Cost for Street: $437,695.00

Survey Street	Start Street	End Street	Orientation	Cost
PRINCETON AVE	HARVARD AVE	WILLIAMS AVE	N	$151,740.00
PRINCETON AVE	WILLIAMS AVE	HARVARD AVE	S	$285,955.00

PRIVATE — Total Cost for Street: $26,340.00

Survey Street	Start Street	End Street	Orientation	Cost
PRIVATE	PRIVATE	RIVERVIEW DR	E	$26,340.00

QUADY LN — Total Cost for Street: $365,000.00

Survey Street	Start Street	End Street	Orientation	Cost
QUADY LN	534 QUADY LN	GOOSECROSS DR	S	$50,955.00
QUADY LN	COSENTINO DR	574 QUADY LN	S	$126,655.00
QUADY LN	GOOSECROSS DR	OAKRIDGE DR	N	$78,475.00
QUADY LN	OAKRIDGE DR	COSENTINO DR	N	$108,915.00

R ST — Total Cost for Street: $113,039.00

Survey Street	Start Street	End Street	Orientation	Cost
R ST	HOWARD RD	PINE ST	NE	$113,039.00

RANCHO MIRAGE RD — Total Cost for Street: $532,359.00

Survey Street	Start Street	End Street	Orientation	Cost
RANCHO MIRAGE RD	DEL LAGO WAY	LA QUINTA WAY	W	$54,594.00
RANCHO MIRAGE RD	LA QUINTA WAY	PASEO DEL MAR PRKW	E	$58,860.00
RANCHO MIRAGE RD	LINDA MESA DR	LOMA LINDA LN	E	$182,677.50
RANCHO MIRAGE RD	LOMA LINDA LN	ORTEGA DR	W	$70,056.00
RANCHO MIRAGE RD	ORTEGA DR	DEL LAGO WAY	W	$106,609.50
RANCHO MIRAGE RD	PASEO DEL MAR PRKW	LINDA MESA DR	E	$59,562.00

RANCHO SANTA FE DR — Total Cost for Street: $256,795.00

Survey Street	Start Street	End Street	Orientation	Cost
RANCHO SANTA FE DR	LOMA LINDA LN	VERDE MESA WAY	W	$119,645.00

RANCHO SANTA FE DR	VERDE MESA WAY	LOMA LINDA LN	E	$137,150.00

RD 28

Total Cost for Street: **$1,105,409.00**

Survey Street	Start Street	End Street	Orientation	Cost
RD 28	14143 RD 28	14143 RD 28	E	$76,494.00
RD 28	145 KNOX AVE	TRAIL WAY	E	$54,900.00
RD 28	A ST	TRAIL WAY	W	$237,275.00
RD 28	E ALMOND AVE	KNOX RD	W	$473,430.00
RD 28	KNOX ST	13306 RD 28	W	$37,950.00
RD 28	TRAIL WAY	OLIVE AVE	W	$225,360.00

REN WAY

Total Cost for Street: **$810,285.00**

Survey Street	Start Street	End Street	Orientation	Cost
REN WAY	3158 REN WAY	WESTBERRY BVD	S	$135,050.00
REN WAY	CREEK DR	TIMBERLINE DR	N	$52,320.00
REN WAY	DOUBLE TREE WAY	CREEK DR	N	$75,360.00
REN WAY	KENT WAY	3414 REN WAY	S	$54,795.00
REN WAY	TIMBERLINE DR	WOLFTRAP ST	S	$247,645.00
REN WAY	WESTBERRY BVD	TIMBERLINE DR	S	$42,840.00
REN WAY	WOLFTRAP ST	DOUBLE TREE WAY	N	$66,060.00
REN WAY	ZAK WAY	KENT WAY	N	$136,215.00

RENEE WAY

Total Cost for Street: **$124,123.00**

Survey Street	Start Street	End Street	Orientation	Cost
RENEE WAY	LUCIA WAY	NOREEN WAY	S	$43,812.00
RENEE WAY	NOREEN WAY	LUCIA WAY	N	$80,311.00

RHINE CT

Total Cost for Street: **$82,920.00**

Survey Street	Start Street	End Street	Orientation	Cost
RHINE CT	PETITE AVE	PETITE AVE	S/E/	$82,920.00

RIVER POINTE

Total Cost for Street: **$55,515.00**

Survey Street	Start Street	End Street	Orientation	Cost
RIVER POINTE	PRIVATE	RIVERVIEW DR	W	$55,515.00

RIVERSIDE CT

Total Cost for Street: **$14,415.00**

Survey Street	Start Street	End Street	Orientation	Cost
RIVERSIDE CT	705 RIVERSIDE CT	E RIVERSIDE DR	E	$6,795.00
RIVERSIDE CT	E RIVERSIDE DR	705 RIVERSIDE CT	W	$7,620.00

RIVERSIDE DR

Total Cost for Street: **$1,005,524.00**

Survey Street	Start Street	End Street	Orientation	Cost
RIVERSIDE DR	COLUMBIA ST	SONORA ST	N	$77,445.00
RIVERSIDE DR	N D ST	SIERRA ST	N	$83,200.00
RIVERSIDE DR	SHARON BVD	N D ST	S	$754,884.00
RIVERSIDE DR	SIERRA ST	700 SIERRA ST	N	$35,940.00
RIVERSIDE DR	SONORA ST	SHARON BVD	S	$54,055.00

RIVERVIEW DR

Total Cost for Street: **$2,446,795.00**

Survey Street	Start Street	End Street	Orientation	Cost
RIVERVIEW DR	1030 CAITLAN DR	CAITLAN DR	S	$38,460.00
RIVERVIEW DR	1405 RIVERVIEW DR	1425 RIVERVIEW DR	N	$61,782.00
RIVERVIEW DR	1431 RIVERVIEW DR	W CENTRAL AVE	W	$35,607.00
RIVERVIEW DR	CAITLAN DR	SUMMER SET LN	S	$119,450.00
RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	N	$160,332.00
RIVERVIEW DR	IMPERIAL DR	N SCHNOOR AVE	S	$57,810.00

RIVERVIEW DR	MAINBERRY DR	SHANNON AVE	S	$145,510.00
RIVERVIEW DR	MONOCOTT DR	GRANADA DR	S	$305,785.00
RIVERVIEW DR	N GRANADA DR	VALLEY WAY	S	$79,380.00
RIVERVIEW DR	N SCHNOOR AVE	RIVER POINTE	N	$145,140.00
RIVERVIEW DR	ORCHARD AVE	CENTRAL PL	S	$60,918.00
RIVERVIEW DR	PAINTBRUSH DR	WOLFTRAP CT	S	$108,855.00
RIVERVIEW DR	PRIVATE	MAINBERRY DR	S	$56,160.00
RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	N	$255,485.00
RIVERVIEW DR	SCHNOOR AVE	ORCHARD AVE	S	$98,868.00
RIVERVIEW DR	SHANNON AVE	IMPERIAL DR	S	$62,790.00
RIVERVIEW DR	SUBURBAN AVE	PAINTBRUSH DR	S	$84,355.00
RIVERVIEW DR	SUMMER SET LN	WESTBERRY BVD	S	$243,159.00
RIVERVIEW DR	VALLEY WAY	2300 RIVERVIEW DR	S	$129,195.00
RIVERVIEW DR	W CENTRAL AVE	ARAM AVE	E/S	$95,379.00
RIVERVIEW DR	WESTBERRY BVD	SUBURBAN AVE	S	$24,360.00
RIVERVIEW DR	WOLFTRAP CT	MONOCOTT DR	S	$78,015.00

RIVERWALK DR

Total Cost for Street: **$921,663.50**

Survey Street	Start Street	End Street	Orientation	Cost
RIVERWALK DR	CENTRAL AVE	N B ST	E/S	$187,125.00
RIVERWALK DR	N A ST	CENTRAL AVE	N/W	$579,096.00
RIVERWALK DR	N B ST	N A ST	S	$155,442.50

ROBINWOOD WAY

Total Cost for Street: **$200,847.00**

Survey Street	Start Street	End Street	Orientation	Cost
ROBINWOOD WAY	1300 ROBINWOOD WAY	1404 ROBINWOOD WAY	S	$77,600.00
ROBINWOOD WAY	1404 ROBINWOOD WAY	1416 ROBINWOOD WAY	S	$63,711.00
ROBINWOOD WAY	1500 ROBINWOOD WAY	FOUNTAIN WAY	S	$39,396.00
ROBINWOOD WAY	FOUNTAIN WAY	1508 ROBINWOOD WAY	N	$6,780.00
ROBINWOOD WAY	KERN ST	1300 ROBINWOOD WAY	S	$13,360.00

ROGERS ST

Total Cost for Street: **$151,280.00**

Survey Street	Start Street	End Street	Orientation	Cost
ROGERS ST	E CLEVELAND AVE	GREEN WAY	E	$72,612.00
ROGERS ST	GREEN WAY	1124 ROGERS ST	W	$78,668.00

ROMA COURT

Total Cost for Street: **$181,365.00**

Survey Street	Start Street	End Street	Orientation	Cost
ROMA COURT	1252 ROMA COURT	MILANO LANE	W	$24,240.00
ROMA COURT	1355 ROMA CT	MILANO RD	E	$74,190.00
ROMA COURT	MILANO LANE	1362 ROMA COURT	W	$82,935.00

ROOSEVELT AVE

Total Cost for Street: **$1,539,241.50**

Survey Street	Start Street	End Street	Orientation	Cost
ROOSEVELT AVE	12TH ST	S A ST	W	$248,025.00
ROOSEVELT AVE	A ST	S LAKE ST	E	$154,645.00
ROOSEVELT AVE	OLIVE AVE	A ST	E	$428,490.00
ROOSEVELT AVE	S A ST	S B ST	W	$153,330.00
ROOSEVELT AVE	S B ST	S C ST	W	$199,940.00
ROOSEVELT AVE	S LAKE ST	SUNRISE AVE	E	$153,055.00
ROOSEVELT AVE	SUNRISE AVE	S LAKE ST	W	$164,121.50
ROOSEVELT AVE	VARBELLA WAY	OLIVE AVE	E	$37,635.00

ROSE ST

Total Cost for Street: **$45,395.00**

Survey Street	Start Street	End Street	Orientation	Cost

ROSE ST	CROSS ST	830 CROSS ST	SW	$45,395.00

ROTAN AVE — Total Cost for Street: $302,163.00

Survey Street	Start Street	End Street	Orientation	Cost
ROTAN AVE	1501 FIFTH ST	FIFTH ST	W	$47,192.00
ROTAN AVE	1501 HOWARD RD	HOWARD RD	E	$38,535.00
ROTAN AVE	413 ROTAN AVE	417 ROTAN AVE	E	$18,600.00
ROTAN AVE	FIFTH ST	1425 ROTAN AVE	E	$43,980.00
ROTAN AVE	FOURTH ST	1500 ROTAN AVE	W	$33,616.00
ROTAN AVE	HOWARD RD	1500 HOWARD RD	W	$15,780.00
ROTAN AVE	OAK ST	HOWARD RD	E	$104,460.00

ROYAL DR — Total Cost for Street: $377,520.00

Survey Street	Start Street	End Street	Orientation	Cost
ROYAL DR	UNIVERSITY AVE	W PARK DR	W	$198,925.00
ROYAL DR	W PARK DR	UNIVERSITY AVE	E	$178,595.00

RUBICON AVE — Total Cost for Street: $62,635.00

Survey Street	Start Street	End Street	Orientation	Cost
RUBICON AVE	IVY GLEN DR	ALMOND AVE	E	$62,635.00

RUNNING BROOK DR — Total Cost for Street: $184,440.00

Survey Street	Start Street	End Street	Orientation	Cost
RUNNING BROOK DR	RIVERBANK DR	SHORESIDE DR	S	$54,960.00
RUNNING BROOK DR	SAN PIETRO DR	RIVERBANK DR	N	$95,370.00
RUNNING BROOK DR	SHORESIDE DR	SAN PIETRO DR	S	$34,110.00

RUSH ST — Total Cost for Street: $23,695.00

Survey Street	Start Street	End Street	Orientation	Cost
RUSH ST	1002 NEBRASKA AVE	N D ST	N	$23,695.00

S A ST — Total Cost for Street: $1,734,975.00

Survey Street	Start Street	End Street	Orientation	Cost
S A ST	10TH ST	11TH ST	SW	$117,025.00
S A ST	11TH ST	12TH ST	SW	$257,200.00
S A ST	12TH ST	13TH ST	SW	$186,415.00
S A ST	13TH ST	ROOSEVELT AVE	SW	$14,220.00
S A ST	1470 S A ST	TOZER ST	S	$43,715.00
S A ST	213 S A ST	6TH ST	NE	$46,125.00
S A ST	301 S A ST	301 S A ST	NE	$7,335.00
S A ST	6TH ST	CLINTON ST	SW	$310,325.00
S A ST	CLINTON ST	424 S A ST	SW	$168,680.00
S A ST	E YOSEMITE AVE	6TH ST	SW	$130,395.00
S A ST	MARIPOSA ST	1470 S A ST	S	$32,240.00
S A ST	ROOSEVELT AVE	12TH ST	NE	$215,400.00
S A ST	SUNRISE AVE	10TH ST	SW	$205,900.00

S B ST — Total Cost for Street: $1,449,462.50

Survey Street	Start Street	End Street	Orientation	Cost
S B ST	10TH ST	11TH ST	SW	$156,235.00
S B ST	11TH ST	12TH ST	SW	$211,925.00
S B ST	12TH ST	13TH ST	SW	$202,680.00
S B ST	13TH ST	14TH ST	SW	$188,185.00
S B ST	6TH ST	CLINTON ST	SW	$244,815.00
S B ST	9TH ST	10TH ST	SW	$69,435.00

S B ST	CLINTON ST	9TH ST	SW	$201,947.50
S B ST	E YOSEMITE AVE	6TH ST	SW	$39,975.00
S B ST	ROOSEVELT AVE	13TH ST	NE	$102,385.00
S B ST	SUNRISE AVE	CLINTON ST	NE	$31,880.00

S C ST

Total Cost for Street: **$2,275,061.50**

Survey Street	Start Street	End Street	Orientation	Cost
S C ST	10TH ST	11TH ST	SW	$184,155.00
S C ST	11TH ST	12TH ST	SW	$191,315.00
S C ST	12TH ST	13TH ST	SW	$153,644.00
S C ST	13TH ST	14TH ST	SW	$191,602.50
S C ST	14TH ST	1030 S C ST	SW	$200,290.00
S C ST	6TH ST	7TH ST	SW	$317,310.00
S C ST	7TH ST	CLINTON ST	SW	$212,100.00
S C ST	9TH ST	10TH ST	SW	$232,505.00
S C ST	CLINTON ST	9TH ST	SW	$282,245.00
S C ST	E YOSEMITE AVE	6TH ST	SW	$169,200.00
S C ST	ROOSEVELT AVE	14TH ST	NE	$140,695.00

S D ST

Total Cost for Street: **$1,692,467.50**

Survey Street	Start Street	End Street	Orientation	Cost
S D ST	10TH ST	11TH ST	SW	$173,240.00
S D ST	11TH ST	12TH ST	SW	$261,820.00
S D ST	12TH ST	13TH ST	SW	$139,535.00
S D ST	13TH ST	904 S D ST	SW	$94,930.00
S D ST	14TH ST	13TH ST	NE	$107,400.00
S D ST	6TH ST	7TH ST	SW	$248,640.00
S D ST	7TH ST	316 S D ST	SW	$162,200.00
S D ST	9TH ST	10TH ST	SW	$114,140.00
S D ST	CLINTON ST	9TH ST	SW	$154,980.00
S D ST	E YOSEMITE AVE	6TH ST	SW	$172,282.50
S D ST	OLIVE AVE	14TH ST	NE	$63,300.00

S DOUBLE TREE WAY

Total Cost for Street: **$540,540.00**

Survey Street	Start Street	End Street	Orientation	Cost
S DOUBLE TREE WAY	CHIANTI AVE	W ALMOND AVE	W	$71,490.00
S DOUBLE TREE WAY	DESERT RANCH WAY	MAPLE ST	E	$79,380.00
S DOUBLE TREE WAY	GAMAY AVE	DESERT RANCH WAY	E	$61,890.00
S DOUBLE TREE WAY	MAPLE ST	PLUMAS ST	E	$81,000.00
S DOUBLE TREE WAY	PLUMAS ST	GAMAY AVE	W	$185,655.00
S DOUBLE TREE WAY	W ALMOND AVE	CHIANTI AVE	E	$61,125.00

S E ST

Total Cost for Street: **$776,423.25**

Survey Street	Start Street	End Street	Orientation	Cost
S E ST	100 7TH ST	7TH ST	NE	$149,209.50
S E ST	320 S E ST	CLINTON ST	SW	$98,925.75
S E ST	6TH ST	224 S E ST	SW	$202,920.00
S E ST	7TH ST	6TH ST	NE	$240,336.00
S E ST	E YOSEMITE AVE	6TH ST	SW	$85,032.00

S G ST

Total Cost for Street: **$853,409.00**

Survey Street	Start Street	End Street	Orientation	Cost
S G ST	11TH ST	700 S G ST	SW	$36,820.00
S G ST	12TH ST	725 S G ST	NE	$12,960.00

S G ST	200 MADERA AVE	MADERA AVE	SW	$189,755.00
S G ST	501 S G ST	EIGHTH ST	NE	$127,695.00
S G ST	613 S G ST	MADERA AVE	NE	$11,400.00
S G ST	709 S G ST	11TH ST	NE	$14,180.00
S G ST	724 S G ST	12TH ST	SW	$24,615.00
S G ST	EIGHTH ST	414 S G ST	SW	$145,700.00
S G ST	MADERA AVE	11TH ST	SW	$35,160.00
S G ST	SEVENTH ST	SIXTH ST	NE	$117,424.00
S G ST	SIXTH ST	SEVENTH ST	SW	$137,700.00

S GATEWAY DR

Total Cost for Street: **$1,414,060.00**

Survey Street	Start Street	End Street	Orientation	Cost
S GATEWAY DR	10TH ST	11TH ST	SW	$77,215.00
S GATEWAY DR	11TH ST	12TH ST	SW	$286,470.00
S GATEWAY DR	12TH ST	OLIVE AVE	SE	$105,640.00
S GATEWAY DR	200 S GATEWAY DR	6TH ST	NW	$100,320.00
S GATEWAY DR	309 S GATEWAY DR	309 S GATEWAY DR	NE	$19,815.00
S GATEWAY DR	409 S GATEWAY DR	409 S GATEWAY DR	NE	$55,335.00
S GATEWAY DR	514 S GATEWAY DR	10TH ST	SW	$40,680.00
S GATEWAY DR	6TH ST	E YOSEMITE AVE	NE	$119,592.00
S GATEWAY DR	E YOSEMITE AVE	6TH ST	SW	$43,578.00
S GATEWAY DR	EIGHTH ST	MADERA AVE	SW	$192,615.00
S GATEWAY DR	OLIVE AVE	11TH ST	NE	$241,700.00
S GATEWAY DR	SEVENTH ST	EIGHTH ST	SW	$50,370.00
S GATEWAY DR	SIXTH ST	SEVENTH ST	SW	$80,730.00

S H ST

Total Cost for Street: **$246,202.00**

Survey Street	Start Street	End Street	Orientation	Cost
S H ST	417 S H ST	EIGHTH ST	NE	$48,460.00
S H ST	CONSTRUCTION	SIXTH ST	NE	$87,336.00
S H ST	EIGHTH ST	317 S H ST	NE	$24,474.00
S H ST	SIXTH ST	W YOSEMITE AVE	NE	$85,932.00

S I ST

Total Cost for Street: **$1,568,883.00**

Survey Street	Start Street	End Street	Orientation	Cost
S I ST	605 S I ST	NINTH ST	NE	$355,686.00
S I ST	EIGHTH ST	424 S I ST	SW	$133,935.00
S I ST	FIFTH ST	W YOSEMITE AVE	SW	$122,235.00
S I ST	FOURTH ST	FIFTH ST	SW	$116,230.00
S I ST	NINTH ST	OLIVE AVE	SW	$393,607.00
S I ST	SEVENTH ST	EIGHTH ST	SW	$188,535.00
S I ST	SIXTH ST	SEVENTH ST	SW	$168,310.00
S I ST	W YOSEMITE AVE	SIXTH ST	SW	$90,345.00

S LAKE ST

Total Cost for Street: **$1,535,816.50**

Survey Street	Start Street	End Street	Orientation	Cost
S LAKE ST	11TH ST	12TH ST	SW	$128,140.00
S LAKE ST	6TH ST	CLINTON ST	SW	$253,152.50
S LAKE ST	701 S LAKE ST	ROOSEVELT AVE	E	$66,800.00
S LAKE ST	7TH ST	6TH ST	NE	$68,280.00
S LAKE ST	9TH ST	CLINTON ST	NE	$63,880.00
S LAKE ST	CLINTON ST	MOORE AVE	SW	$278,315.00
S LAKE ST	E YOSEMITE AVE	6TH ST	SW	$100,320.00

S LAKE ST	HULL AVE	WALLACE AVE	N	$92,720.00
S LAKE ST	MOORE AVE	SUNRISE AVE	SW	$152,635.00
S LAKE ST	ROOSEVELT AVE	11TH ST	SW	$52,580.00
S LAKE ST	SUNRISE AVE	MOORE AVE	NE	$110,415.00
S LAKE ST	WALLACE AVE	HULL AVE	S	$168,579.00

S O ST

Total Cost for Street: $44,355.00

Survey Street	Start Street	End Street	Orientation	Cost
S O ST	208 S O ST	216 S O ST	SW	$44,355.00

S PINE ST

Total Cost for Street: $31,080.00

Survey Street	Start Street	End Street	Orientation	Cost
S PINE ST	13241 S PINE ST	INDEPENDENCE DRIVE	W	$31,080.00

S Q ST

Total Cost for Street: $64,620.00

Survey Street	Start Street	End Street	Orientation	Cost
S Q ST	HOWARD RD	OLIVE AVE	NE	$64,620.00

S TIMBERLINE DR

Total Cost for Street: $391,395.00

Survey Street	Start Street	End Street	Orientation	Cost
S TIMBERLINE DR	3061 S TIMBERLINE DR	GAMAY AVE	W	$26,880.00
S TIMBERLINE DR	CAPISTRANO DR	GAMAY AVE	E	$60,015.00
S TIMBERLINE DR	CHIANTI AVE	MERLOT AVE	E	$81,915.00
S TIMBERLINE DR	GAMAY AVE	MERLOT AVE	W	$111,150.00
S TIMBERLINE DR	MERLOT AVE	CHIANTI AVE	W	$111,435.00

S WOLFTRAP ST

Total Cost for Street: $669,780.00

Survey Street	Start Street	End Street	Orientation	Cost
S WOLFTRAP ST	321 WOLFTRAP ST	DESERT RANCH WAY	E	$84,480.00
S WOLFTRAP ST	CAPISTRANO DR	MERLOT AVE	W	$74,835.00
S WOLFTRAP ST	CHIANTI AVE	321 WOLFTRAP ST	E	$80,455.00
S WOLFTRAP ST	DESERT RANCH WAY	GAMAY AVE	W	$74,790.00
S WOLFTRAP ST	GAMAY AVE	CAPISTRANO DR	W	$42,455.00
S WOLFTRAP ST	MAPLE ST	OAK ST	E	$103,995.00
S WOLFTRAP ST	MERLOT AVE	CHIANTI AVE	W	$74,940.00
S WOLFTRAP ST	OAK ST	PLUMAS ST	W	$67,800.00
S WOLFTRAP ST	PLUMAS ST	MAPLE ST	W	$66,030.00

SAINT MARY AVE

Total Cost for Street: $96,915.00

Survey Street	Start Street	End Street	Orientation	Cost
SAINT MARY AVE	MUNRAS AVE	STADIUM RD	N	$96,915.00

SALVADOR WY

Total Cost for Street: $135,570.00

Survey Street	Start Street	End Street	Orientation	Cost
SALVADOR WY	JOSEPHINE CT	JADEN CT	E	$53,850.00
SALVADOR WY	LA JOLLA WY	JOSEPHINE CT	W	$81,720.00

SAN ANDREA AVE

Total Cost for Street: $232,730.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN ANDREA AVE	772 SAN ANDREA AVE	MUNRAS AVE	S	$88,000.00
SAN ANDREA AVE	MUNRAS AVE	STADIUM RD	N	$130,030.00
SAN ANDREA AVE	STADIUM RD	792 SAN ANDREA AVE	S	$14,700.00

SAN ANGELO AVE

Total Cost for Street: $209,890.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN ANGELO AVE	MUNRAS AVE	STADIUM RD	N	$110,070.00

SAN ANGELO AVE	STADIUM RD	MUNRAS AVE	S	$99,820.00

SAN BRUNO AVE — Total Cost for Street: $674,312.50

Survey Street	Start Street	End Street	Orientation	Cost
SAN BRUNO AVE	1020 SAN BRUNO AVE	LIME AVE	SW	$32,040.00
SAN BRUNO AVE	1999 SAN BRUNO AVE	LEMON AVE	NE	$84,210.00
SAN BRUNO AVE	LEMON AVE	VALENCIA AVE	NE	$100,912.50
SAN BRUNO AVE	LIME AVE	188 SAN BRUNO AVE	SW	$194,640.00
SAN BRUNO AVE	RAYMOND THOMAS ST	VALENCIA AVE	SW	$61,235.00
SAN BRUNO AVE	VALENCIA AVE	1012 SAN BRUNO AVE	SW	$201,275.00

SAN CARLOS AVE — Total Cost for Street: $241,970.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN CARLOS AVE	937 SAN CARLOS AVE	TANGERINE AVE	N	$8,520.00
SAN CARLOS AVE	LEMON AVE	VALENCIA AVE	N	$35,535.00
SAN CARLOS AVE	TANGERINE AVE	VALENCIA AVE	S	$93,300.00
SAN CARLOS AVE	VALENCIA AVE	LEMON AVE	S	$104,615.00

SAN DIEGO AVE — Total Cost for Street: $428,509.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN DIEGO AVE	CITRUS WAY	SAN JOSE AVE	NE	$84,595.00
SAN DIEGO AVE	LEMON AVE	VALENCIA AVE	N	$94,464.00
SAN DIEGO AVE	SAN JOSE AVE	VALENCIA AVE	SW	$39,660.00
SAN DIEGO AVE	VALENCIA AVE	LEMON AVE	S	$209,790.00

SAN GABRIEL DR — Total Cost for Street: $343,656.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN GABRIEL DR	297 SAN GABRIEL DR	VERDE MESA WAY	E	$57,847.50
SAN GABRIEL DR	LA QUINTA WAY	MIRA LOMA WAY	E	$76,045.50
SAN GABRIEL DR	LINDA MESA DR	PASEO DEL MAR PRKW	W	$63,990.00
SAN GABRIEL DR	MIRA LOMA WAY	297 SAN GABRIEL DR	E	$12,798.00
SAN GABRIEL DR	PASEO DEL MAR PRKW	LA QUINTA WAY	W	$68,418.00
SAN GABRIEL DR	VERDE MESA WAY	LINDA MESA DR	W	$64,557.00

SAN JOSE AVE — Total Cost for Street: $195,810.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN JOSE AVE	CITRUS WAY	VALENCIA AVE	S	$33,795.00
SAN JOSE AVE	LEMON AVE	VALENCIA AVE	N	$29,280.00
SAN JOSE AVE	SAN DIEGO AVE	CITRUS WAY	S	$43,800.00
SAN JOSE AVE	VALENCIA AVE	LEMON AVE	S	$88,935.00

SAN JUAN DR — Total Cost for Street: $151,415.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN JUAN DR	ASILOMAR DR	SANTA LUCIA DR	S	$79,175.00
SAN JUAN DR	SANTA LUCIA DR	ASILOMAR DR	N	$72,240.00

SAN MARCO AVE — Total Cost for Street: $173,250.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN MARCO AVE	MUNRAS AVE	STADIUM RD	N	$93,435.00
SAN MARCO AVE	STADIUM RD	MUNRAS AVE	S	$79,815.00

SAN PIETRO DR — Total Cost for Street: $197,542.50

Survey Street	Start Street	End Street	Orientation	Cost
SAN PIETRO DR	1378 SAN PIETRO DR	FRESHET DR	W	$2,160.00
SAN PIETRO DR	3467 RUNNING BROOK DR	RUNNING BROOK DR	W	$44,580.00
SAN PIETRO DR	FAIRFIELD WAY	RUNNING BROOK DR	E	$24,495.00

SAN PIETRO DR	FRESHET DR	FAIRFIELD WAY	E	$40,480.00
SAN PIETRO DR	RUNNING BROOK DR	1384 SAN PIETRO DR	W	$85,827.50

SAN RAMON AVE

Total Cost for Street: $77,989.00

Survey Street	Start Street	End Street	Orientation	Cost
SAN RAMON AVE	LEMON AVE	VALENCIA AVE	N	$27,645.00
SAN RAMON AVE	VALENCIA AVE	LEMON AVE	S	$50,344.00

SAN SEBASTIAN WAY

Total Cost for Street: $481,918.50

Survey Street	Start Street	End Street	Orientation	Cost
SAN SEBASTIAN WAY	1250 SAN SEBASTIAN WAY	LAGUNA WAY	W	$6,654.00
SAN SEBASTIAN WAY	BILBAO CT	TOLEDO WAY	E	$68,735.00
SAN SEBASTIAN WAY	LAGUNA WAY	BILBAO CT	E	$117,946.50
SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	W	$212,878.00
SAN SEBASTIAN WAY	TOLEDO WAY	SEGOVIA CT	E	$75,705.00

SANARITA CT

Total Cost for Street: $122,869.00

Survey Street	Start Street	End Street	Orientation	Cost
SANARITA CT	1621 SANARITA CT	JERICHO DR	N	$47,329.00
SANARITA CT	1632 SANARITA CT	1651 SANARITA CT	S	$3,315.00
SANARITA CT	1651 SANARITA CT	1631 SANARITA CT	N	$15,765.00
SANARITA CT	JERICHO DR	1632 SANARITA CT	S	$56,460.00

SANARITA WY

Total Cost for Street: $500,539.00

Survey Street	Start Street	End Street	Orientation	Cost
SANARITA WY	1200 SANARITA WY	1204 SANARITA WY	S	$4,908.00
SANARITA WY	1205 SANARITA WAY	1200 SANARITA WAY	N	$18,042.00
SANARITA WY	1208 SANARITA WY	JESSE DR	S	$14,607.00
SANARITA WY	DOMINGUEZ DR	JERICHO DR	S	$207,508.00
SANARITA WY	JERICHO DR	DOMINGUEZ DR	N	$129,165.00
SANARITA WY	JESSE DR	DOMINGUEZ DR	S	$92,649.00
SANARITA WY	JESSIE DR	1205 SANARITA WAY	N	$33,660.00

SAND DOLLAR CT

Total Cost for Street: $185,175.00

Survey Street	Start Street	End Street	Orientation	Cost
SAND DOLLAR CT	702 SAND DOLLAR CT	BAY VIEW DR	W	$51,675.00
SAND DOLLAR CT	BAY VIEW DR	702 SAND DOLLAR CT	E/N/	$133,500.00

SANDALWOOD DR

Total Cost for Street: $380,340.00

Survey Street	Start Street	End Street	Orientation	Cost
SANDALWOOD DR	GRANADA DR	GREENWOOD DR	NE	$193,960.00
SANDALWOOD DR	GREENWOOD DR	GRANADA DR	SW	$186,380.00

SANTA BONITA ST

Total Cost for Street: $757,241.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA BONITA ST	117 SANTA BONITA ST	OLIVE AVE	E	$42,996.00
SANTA BONITA ST	205 SANTA BONITA ST	127 SANTA BONITA ST	E	$86,475.00
SANTA BONITA ST	ALMOND AVE	CHIANTI CT	E	$38,460.00
SANTA BONITA ST	CHIANTI CT	DEERWOOD DR	E	$84,660.00
SANTA BONITA ST	DEERWOOD DR	ALMOND AVE	W	$260,195.00
SANTA BONITA ST	EL MONTE ST	GAMAY ST	W	$75,960.00
SANTA BONITA ST	GAMAY ST	MERLOT AVE	W	$72,660.00
SANTA BONITA ST	MAPLE ST	300 SANTA BONITA ST	W	$1,215.00
SANTA BONITA ST	MERLOT AVE	DEERWOOD DR	W	$71,700.00
SANTA BONITA ST	OLIVE AVE	106 SANTA BONITA ST	W	$22,920.00

SANTA CLARA ST

Total Cost for Street: $142,080.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA CLARA ST	209 SANTA CLARA ST	205 SANTA CLARA ST	E	$11,700.00
SANTA CLARA ST	EL MONTE ST	GAMAY ST	W	$50,400.00
SANTA CLARA ST	GAMAY ST	EL MONTE ST	E	$79,980.00

SANTA CRUZ ST

Total Cost for Street: $301,374.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA CRUZ ST	137 SANTA CRUZ ST	123 SANTA CRUZ ST	E	$27,474.00
SANTA CRUZ ST	201 SANTA CRUZ ST	201 SANTA CRUZ ST	E	$15,120.00
SANTA CRUZ ST	534 OLIVE AVE	OLIVE AVE	E	$22,080.00
SANTA CRUZ ST	605 EL MONTE ST	EL MONTE ST	W	$34,680.00
SANTA CRUZ ST	EL MONTE ST	533 EL MONTE ST	E	$36,300.00
SANTA CRUZ ST	OLIVE AVE	714 SANTA BONITA ST	W	$165,720.00

SANTA FE CT

Total Cost for Street: $111,749.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA FE CT	1306 SANTA FE CT	ELM AVE	SE	$58,589.00
SANTA FE CT	ELM AVE	1306 SANTA FE CT	NW	$53,160.00

SANTA FE ST

Total Cost for Street: $75,174.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA FE ST	ELM AVE	PERCY ST	SE	$16,620.00
SANTA FE ST	PERCY ST	ELM AVE	NW	$58,554.00

SANTA LUCIA DR

Total Cost for Street: $520,920.00

Survey Street	Start Street	End Street	Orientation	Cost
SANTA LUCIA DR	119 SANTA LUCIA DR	POINT SUR DR	E	$135,060.00
SANTA LUCIA DR	59 SANTA LUCIA DR	107 SANTA LUCIA DR	E	$73,200.00
SANTA LUCIA DR	HOWARD RD	49 SANTA LUCIA DR	E	$45,375.00
SANTA LUCIA DR	MANRESA DR	SEASIDE DR	W	$57,225.00
SANTA LUCIA DR	MARINA DR	HOWARD RD	W	$33,375.00
SANTA LUCIA DR	POINT SUR DR	SAN JUAN DR	W	$77,355.00
SANTA LUCIA DR	SAN JUAN DR	MANRESA DR	W	$79,680.00
SANTA LUCIA DR	SEASIDE DR	MARINA DR	W	$19,650.00

SAUNDERS AVE

Total Cost for Street: $255,435.00

Survey Street	Start Street	End Street	Orientation	Cost
SAUNDERS AVE	1038 SAUNDERS AVE	1050 SAUNDERS AVE	S	$8,580.00
SAUNDERS AVE	1050 SAUNDERS AVE	LEMON AVE	S	$39,360.00
SAUNDERS AVE	942 SAUNDERS AVE	VALENCIA AVE	S	$35,190.00
SAUNDERS AVE	LEMON AVE	VALENCIA AVE	N	$114,990.00
SAUNDERS AVE	VALENCIA AVE	1038 SAUNDERS AVE	S	$57,315.00

SAUNDERS RD

Total Cost for Street: $24,000.00

Survey Street	Start Street	End Street	Orientation	Cost
SAUNDERS RD	918 SAUNDERS AVE	930 SAUNDERS RD	S	$24,000.00

SAURET ST

Total Cost for Street: $139,345.00

Survey Street	Start Street	End Street	Orientation	Cost
SAURET ST	DRAKE ST	PEERLESS ST	N	$45,495.00
SAURET ST	PEERLESS ST	SOLANO ST	N	$43,290.00
SAURET ST	SOLANO ST	DRAKE ST	S	$50,560.00

SAWMILL ST — Total Cost for Street: $155,482.50

Survey Street	Start Street	End Street	Orientation	Cost
SAWMILL ST	ADELAIDE AVE	SOQUEL CT	SE	$33,345.00
SAWMILL ST	LILLY ST	ADELAIDE AVE	NW	$72,337.50
SAWMILL ST	SOQUEL CT	LILLY ST	SE	$49,800.00

SCARLET DR — Total Cost for Street: $167,190.00

Survey Street	Start Street	End Street	Orientation	Cost
SCARLET DR	1911 SCARLET DR	AZURE DR	N	$13,260.00
SCARLET DR	AZURE DR	CRIMSON WY	S	$24,120.00
SCARLET DR	CRIMSON WY	EMERALD WY	S	$41,295.00
SCARLET DR	EMERALD WY	INDIGO DR	S	$11,115.00
SCARLET DR	INDIGO DR	1931 SCARLET DR	N	$77,400.00

SCHNOOR AVE — Total Cost for Street: $606,684.00

Survey Street	Start Street	End Street	Orientation	Cost
SCHNOOR AVE	1916 RIVERVIEW DR	RIVERVIEW DR	E	$9,576.00
SCHNOOR AVE	1930 MODOC ST	MODOC ST	E	$62,520.00
SCHNOOR AVE	2001 HOWARD RD	HOWARD RD	W	$54,090.00
SCHNOOR AVE	2001 NATIONAL AVE	NATIONAL AVE	W	$91,260.00
SCHNOOR AVE	2001 SCHNOOR AVE	2001 SCHNOOR AVE	W	$18,795.00
SCHNOOR AVE	2300 HOWARD RD	INDUSTRIAL AVE	W	$150,540.00
SCHNOOR AVE	HOWARD RD	1933 SCHNOOR AVE	E	$74,691.00
SCHNOOR AVE	MODOC ST	HOWARD RD	E	$133,395.00
SCHNOOR AVE	RIVERVIEW DR	1917 N SCHNOOR AVE	E	$11,817.00

SEAHORSE CT — Total Cost for Street: $127,860.00

Survey Street	Start Street	End Street	Orientation	Cost
SEAHORSE CT	2123 SEAHORSE CT	SHANNON AVE	N	$58,515.00
SEAHORSE CT	SHANNON AVE	2123 SEAHORSE CT	S	$69,345.00

SEASIDE DR — Total Cost for Street: $140,500.00

Survey Street	Start Street	End Street	Orientation	Cost
SEASIDE DR	ASILOMAR DR	SANTA LUCIA DR	S	$67,800.00
SEASIDE DR	SANTA LUCIA DR	ASILOMAR DR	N	$72,700.00

SEGOVIA CT — Total Cost for Street: $776,705.00

Survey Street	Start Street	End Street	Orientation	Cost
SEGOVIA CT	1277 SEGOVIA CT	BARCELONA WAY	N	$73,950.00
SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	N	$313,360.00
SEGOVIA CT	ALICANTE WAY	TOLUCA	S	$67,980.00
SEGOVIA CT	BARCELONA WAY	ALICANTE WAY	S	$75,780.00
SEGOVIA CT	SAN SEBASTIAN WAY	SEVILLA ST	S	$54,345.00
SEGOVIA CT	SEVILLA ST	1477 SEGOVIA CT	S	$113,290.00
SEGOVIA CT	TOLUCA	SAN SEBASTIAN WAY	S	$78,000.00

SENECA AVE — Total Cost for Street: $258,855.00

Survey Street	Start Street	End Street	Orientation	Cost
SENECA AVE	GARY LN	MADRID LN	E	$125,255.00
SENECA AVE	MADRID LN	GARY LN	W	$133,600.00

SENECA DR — Total Cost for Street: $391,034.00

Survey Street	Start Street	End Street	Orientation	Cost
SENECA DR	GARY LN	HELENA WAY	W	$104,166.00
SENECA DR	HELENA WAY	PECAN AVE	W	$75,114.00

SENECA DR	PECAN AVE	GARY LN	E	$211,754.00

SEPIA CT — Total Cost for Street: $197,190.00

Survey Street	Start Street	End Street	Orientation	Cost
SEPIA CT	1913 SEPIA CT	INDIGO DR	S	$106,035.00
SEPIA CT	INDIGO DR	1923 SEPIA CT	N	$91,155.00

SEVENTH ST — Total Cost for Street: $150,826.00

Survey Street	Start Street	End Street	Orientation	Cost
SEVENTH ST	123 SEVENTH ST	S G ST	NW	$21,222.00
SEVENTH ST	S G ST	301 S G ST	SE	$129,604.00

SEVILLA ST — Total Cost for Street: $151,635.00

Survey Street	Start Street	End Street	Orientation	Cost
SEVILLA ST	SEGOVIA CT	TOLEDO WAY	W	$74,760.00
SEVILLA ST	TOLEDO WAY	SEGOVIA CT	E	$76,875.00

SHANNON AVE — Total Cost for Street: $1,006,931.00

Survey Street	Start Street	End Street	Orientation	Cost
SHANNON AVE	413 SHANNON AVE	413 SHANNON AVE	E	$1,446.00
SHANNON AVE	DRIFTWOOD DR	W PARK DR	W	$196,460.00
SHANNON AVE	LIGHTHOUSE DR	SUNSET AVE	W	$136,745.00
SHANNON AVE	RIVERVIEW DR	DRIFTWOOD DR	W	$124,785.00
SHANNON AVE	SEAHORSE CT	RIVERVIEW DR	E	$185,480.00
SHANNON AVE	STARFISH CT	SEAHORSE CT	E	$84,600.00
SHANNON AVE	SUNSET AVE	VENTURI AVE	E	$120,140.00
SHANNON AVE	VENTURI AVE	LIGHTHOUSE DR	E	$85,260.00
SHANNON AVE	W PARK DR	STARFISH CT	E	$72,015.00

SHARON BVD — Total Cost for Street: $3,078,621.00

Survey Street	Start Street	End Street	Orientation	Cost
SHARON BVD	1930 SHARON BVD	1924 SHARON BVD	W	$112,014.00
SHARON BVD	AVE 17	3174 AVENUE 17	W	$325,944.00
SHARON BVD	COUNTRY CLUB DR	15865 SHARON BLVD	N	$97,530.00
SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	SW	$1,675,200.00
SHARON BVD	E LINCOLN AVE	OWENS ST	NE	$27,480.00
SHARON BVD	HARDING AVE	WILSON AVE	NE	$121,800.00
SHARON BVD	OWENS ST	HARDING AVE	NE	$93,015.00
SHARON BVD	PARKING LOT ENTRANCE	PARKING LOT ENTRANCE	W	$109,863.00
SHARON BVD	RIVERSIDE DR	W SOUTH ST	NE	$155,565.00
SHARON BVD	W SOUTH ST	E LINCOLN AVE	NE	$215,015.00
SHARON BVD	WILSON AVE	E CLEVELAND AVE	NE	$145,195.00

SHELLEY COVE — Total Cost for Street: $123,615.00

Survey Street	Start Street	End Street	Orientation	Cost
SHELLEY COVE	PAMELA DR	PAMELA DR	E /	$123,615.00

SHORESIDE DR — Total Cost for Street: $169,680.00

Survey Street	Start Street	End Street	Orientation	Cost
SHORESIDE DR	1392 SHORESIDE DR	FRESHET DR	W	$36,105.00
SHORESIDE DR	1422 SHORESIDE DR	1410 SHORESIDE DR	W	$21,885.00
SHORESIDE DR	FRESHET DR	RUNNING BROOK DR	E	$93,615.00
SHORESIDE DR	RUNNING BROOK DR	1422 SHORESIDE DR	W	$18,075.00

SIERRA ST — Total Cost for Street: $74,137.00

Survey Street	Start Street	End Street	Orientation	Cost

SIERRA ST	911 SIERRA ST	919 SIERRA ST	E	$10,549.00
SIERRA ST	E CLEVELAND AVE	119 SIERRA ST	E	$63,588.00

SIXTH ST

Total Cost for Street: **$441,573.00**

Survey Street	Start Street	End Street	Orientation	Cost
SIXTH ST	ALLEY	S H ST	SE	$60,900.00
SIXTH ST	S G ST	S GATEWAY DR	SE	$103,680.00
SIXTH ST	S GATEWAY DR	S H ST	NW	$125,550.00
SIXTH ST	S H ST	S G ST	SE	$132,948.00
SIXTH ST	S I ST	205 S I ST	SE	$18,495.00

SOLANO ST

Total Cost for Street: **$294,055.00**

Survey Street	Start Street	End Street	Orientation	Cost
SOLANO ST	CARMEL ST	SAURET ST	E	$17,100.00
SOLANO ST	LOS ARCOS LN	MILOW ST	E	$18,840.00
SOLANO ST	MILOW ST	CARMEL ST	E	$12,360.00
SOLANO ST	PADRE ST	LOS ARCOS LN	W	$173,410.00
SOLANO ST	SAURET ST	PADRE ST	E	$72,345.00

SONORA ST

Total Cost for Street: **$1,033,252.00**

Survey Street	Start Street	End Street	Orientation	Cost
SONORA ST	1004 SONORA ST	E RUSH ST	W	$7,875.00
SONORA ST	710 SONORA ST	RIVERSIDE DR	W	$51,255.00
SONORA ST	904 SONORA ST	E LINCOLN AVE	W	$48,096.00
SONORA ST	918 SONORA ST	916 SONORA ST	W	$8,010.00
SONORA ST	921 SONORA ST	929 SONORA ST	E	$7,848.00
SONORA ST	ADELL ST	SUSAN LN	W	$150,855.00
SONORA ST	ASHLAN WAY	LYNN WAY	E	$124,723.00
SONORA ST	E RUSH ST	1005 SONORA ST	E	$8,295.00
SONORA ST	JOSEPH LN	W CLARK ST	W	$60,636.00
SONORA ST	LYNN WAY	ADELL ST	E	$53,460.00
SONORA ST	RUSH ST	924 SONORA ST	W	$474.00
SONORA ST	SARAH ST	1336 SONORA ST	W	$18,780.00
SONORA ST	SUSAN LN	JOSEPH LN	W	$67,095.00
SONORA ST	W CLARK ST	SARAH ST	W	$50,100.00
SONORA ST	W SHERWOOD WAY	E CLEVELAND AVE	W	$364,050.00
SONORA ST	W SOUTH ST	724 SONORA ST	W	$11,700.00

SOQUEL CT

Total Cost for Street: **$67,310.00**

Survey Street	Start Street	End Street	Orientation	Cost
SOQUEL CT	SAWMILL ST	SAWMILL ST	SE	$67,310.00

ST JULIEN DR

Total Cost for Street: **$337,375.00**

Survey Street	Start Street	End Street	Orientation	Cost
ST JULIEN DR	671 ST JULIEN DR	COSENTINO DR	N	$48,675.00
ST JULIEN DR	COSENTINO DR	GOOSECROSS DR	S	$162,230.00
ST JULIEN DR	GOOSECROSS DR	653 ST JULIEN DR	N	$126,470.00

ST MONTELENA CT

Total Cost for Street: **$232,890.00**

Survey Street	Start Street	End Street	Orientation	Cost
ST MONTELENA CT	MONTEREY DR	MONTEREY DR	S/E/	$232,890.00

ST TROPEZ DR

Total Cost for Street: **$283,265.00**

Survey Street	Start Street	End Street	Orientation	Cost
ST TROPEZ DR	HOWARD RD	EAGLE WAY	W	$22,245.00

ST TROPEZ DR	MAPLE ST	PLUMAS STREET	E	$54,220.00
ST TROPEZ DR	OAK ST	PLUMAS STREET	W	$78,240.00
ST TROPEZ DR	PLUMAS ST	OAK ST	E	$59,080.00
ST TROPEZ DR	PLUMAS STREET	MAPLE ST	W	$69,480.00

ST. MICHELLE DR

Total Cost for Street: **$467,335.00**

Survey Street	Start Street	End Street	Orientation	Cost
ST. MICHELLE DR	COSENTINO DR	GOOSECROSS DR	S	$245,880.00
ST. MICHELLE DR	GOOSECROSS DR	COSENTINO DR	N	$204,655.00
ST. MICHELLE DR	STADIUM RD	COSENTINO DR	S	$16,800.00

ST. MONTELENA DR

Total Cost for Street: **$532,285.00**

Survey Street	Start Street	End Street	Orientation	Cost
ST. MONTELENA DR	COSENTINO DR	GOOSECROSS DR	S	$191,660.00
ST. MONTELENA DR	GOOSECROSS DR	MONTEREY DR	S	$265,985.00
ST. MONTELENA DR	MONTEREY ST	GOOSECROSS DR	N	$74,640.00

STADIUM RD

Total Cost for Street: **$3,604,137.00**

Survey Street	Start Street	End Street	Orientation	Cost
STADIUM RD	109 STADIUM RD	OLIVE AVE	E	$92,652.00
STADIUM RD	705 PECAN AVE	PECAN AVE	W	$328,770.00
STADIUM RD	775 MILANO LANE	MILANO LANE	E	$168,096.00
STADIUM RD	ALMOND AVE	CROWN TERRACE	W	$351,207.00
STADIUM RD	BERNARDI AVE	SAN ANGELO AVE	E	$63,240.00
STADIUM RD	CROWN TERRACE	PARKING LOT ENTRANCE	W	$295,555.00
STADIUM RD	DEERWOOD DR	DEERWOOD CT	S	$256,989.00
STADIUM RD	EL MONTE AVE	GAMAY AVE	W	$199,725.00
STADIUM RD	GAMAY AVE	804 STADIUM RD	W	$38,220.00
STADIUM RD	GAMAY ST	404 STADIUM RD	E	$146,580.00
STADIUM RD	GARY LN	ST. MICHELLE DR	E	$173,040.00
STADIUM RD	MAPLE ST	EL MONTE AVE	W	$202,685.00
STADIUM RD	MILANO LANE	GARY LN	E	$151,245.00
STADIUM RD	OLIVE AVE	MAPLE ST	W	$756,828.00
STADIUM RD	SAINT MARY AVE	SAN MARCO AVE	E	$83,820.00
STADIUM RD	SAN ANDREA AVE	BERNARDI AVE	E	$83,475.00
STADIUM RD	SAN ANGELO AVE	PECAN AVE	E	$32,940.00
STADIUM RD	SAN MARCO AVE	SAN ANDREA AVE	E	$88,080.00
STADIUM RD	ST. MICHELLE DR	ALMOND AVE	E	$90,990.00

STANFORD AVE

Total Cost for Street: **$330,470.00**

Survey Street	Start Street	End Street	Orientation	Cost
STANFORD AVE	1073 STANFORD AVE	VALENCIA AVE	N	$73,140.00
STANFORD AVE	LEMON AVE	1073 STANFORD AVE	N	$5,760.00
STANFORD AVE	TANGERINE AVE	VALENCIA AVE	S	$103,040.00
STANFORD AVE	VALENCIA AVE	LEMON AVE	S	$148,530.00

STARFISH CT

Total Cost for Street: **$127,115.00**

Survey Street	Start Street	End Street	Orientation	Cost
STARFISH CT	SHANNON AVE	SHANNON AVE	S/E/	$127,115.00

STATE ST

Total Cost for Street: **$236,095.00**

Survey Street	Start Street	End Street	Orientation	Cost
STATE ST	LIBERTY LN	WESTBERRY BVD	S	$110,200.00
STATE ST	WESTBERRY BVD	LIBERTY LN	N	$125,895.00

STEEPLE GATE — Total Cost for Street: $72,435.00

Survey Street	Start Street	End Street	Orientation	Cost
STEEPLE GATE	GRANADA DR	PRIVATE	S	$35,955.00
STEEPLE GATE	PRIVATE	GRANADA DR	N	$36,480.00

STEPHANIE LN — Total Cost for Street: $680,475.00

Survey Street	Start Street	End Street	Orientation	Cost
STEPHANIE LN	2380 W CLEVELAND AVE	W CLEVELAND AVE	E	$101,040.00
STEPHANIE LN	2390 STEPHANIE LN	2390 STEPHANIE LN	E	$39,210.00
STEPHANIE LN	2405 FREDERICK CT	FREDERICK CT	W	$37,020.00
STEPHANIE LN	DUTRA CT	TREVOR CT	W	$60,210.00
STEPHANIE LN	DUTRA WAY	JUDITH WAY	E	$61,995.00
STEPHANIE LN	FREDERICK CT	JUDITH CT	W	$62,985.00
STEPHANIE LN	FREDERICK WAY	JONATHAN WAY	E	$68,355.00
STEPHANIE LN	JONATHAN WAY	PARKING LOT ENTRANCE	E	$28,560.00
STEPHANIE LN	JUDITH CT	DUTRA CT	W	$77,340.00
STEPHANIE LN	JUDITH WAY	FREDERICK WAY	E	$69,900.00
STEPHANIE LN	TREVOR WAY	DUTRA WAY	E	$73,860.00

STEVEN COURT — Total Cost for Street: $53,397.50

Survey Street	Start Street	End Street	Orientation	Cost
STEVEN COURT	PAMELA DR	PAMELA DR	W /	$53,397.50

STEVEN LANE — Total Cost for Street: $467,050.00

Survey Street	Start Street	End Street	Orientation	Cost
STEVEN LANE	GLADE AVE	PAMELA DR	W	$254,695.00
STEVEN LANE	KIMBERLY DR	MARIE DR	E	$66,780.00
STEVEN LANE	MARIE DR	GLADE AVE	E	$30,405.00
STEVEN LANE	PAMELA DR	KIMBERLY DR	E	$115,170.00

STINSON AVE — Total Cost for Street: $584,755.00

Survey Street	Start Street	End Street	Orientation	Cost
STINSON AVE	A ST	SUNRISE AVE	E	$273,320.00
STINSON AVE	SUNRISE AVE	A ST	W	$311,435.00

STOREY RD — Total Cost for Street: $266,325.00

Survey Street	Start Street	End Street	Orientation	Cost
STOREY RD	2020 SCARLET DR	EMERALD WY	N	$58,740.00
STOREY RD	CRIMSON WY	1875 STOREY RD	N	$103,395.00
STOREY RD	EMERALD WY	CRIMSON WY	W	$104,190.00

STRAUSS CT — Total Cost for Street: $263,079.00

Survey Street	Start Street	End Street	Orientation	Cost
STRAUSS CT	438 STRAUSS CT	CRYSTAL WAY	S/E/	$175,743.00
STRAUSS CT	CRYSTAL WAY	DIAMOND WAY	N	$87,336.00

STRAUSS LN — Total Cost for Street: $56,983.50

Survey Street	Start Street	End Street	Orientation	Cost
STRAUSS LN	308 STRAUSS LN	438 STRAUSS LN	S	$56,983.50

SUBURBAN AVE — Total Cost for Street: $511,295.00

Survey Street	Start Street	End Street	Orientation	Cost
SUBURBAN AVE	BOULDER AVE	DOUBLE TREE WAY	E	$48,870.00
SUBURBAN AVE	DOUBLE TREE WAY	BOULDER AVE	W /	$176,290.00
SUBURBAN AVE	RIVERVIEW DR	DOUBLE TREE WAY	W	$162,700.00

SUBURBAN AVE	TRAGON ST	RIVERVIEW DR	E	$123,435.00

SULTANA DR

Total Cost for Street: $338,702.50

Survey Street	Start Street	End Street	Orientation	Cost
SULTANA DR	3171 SULTANA DR	TIMBERLINE DR	N	$13,440.00
SULTANA DR	CREEK DR	3161 SULTANA DR	N	$46,860.00
SULTANA DR	TIMBERLINE DR	CREEK DR	S/E/	$278,402.50

SUMMER LN

Total Cost for Street: $540,065.00

Survey Street	Start Street	End Street	Orientation	Cost
SUMMER LN	3121 SUMMER LN	TIMBERLINE DR	N	$102,135.00
SUMMER LN	DOUBLE TREE WAY	WOLFTRAP ST	S	$67,120.00
SUMMER LN	KENT DR	WESTBERRY BVD	S	$129,530.00
SUMMER LN	TIMBERLINE DR	DOUBLE TREE WAY	S	$139,530.00
SUMMER LN	WESTBERRY BVD	KENT DR	N	$101,750.00

SUMMER SET LN

Total Cost for Street: $371,125.00

Survey Street	Start Street	End Street	Orientation	Cost
SUMMER SET LN	DOUBLE TREE WAY	TRABON WAY	E	$62,430.00
SUMMER SET LN	RIVERVIEW DR	LIBERTY LN	W	$244,715.00
SUMMER SET LN	TRABON WAY	RIVERVIEW DR	E	$63,980.00

SUNDANCE LN

Total Cost for Street: $474,230.00

Survey Street	Start Street	End Street	Orientation	Cost
SUNDANCE LN	1826 SUNDANCE LN	W CLEVELAND AVE	W	$37,365.00
SUNDANCE LN	BEECHWOOD WAY	GRAPEWOOD WAY	E	$79,260.00
SUNDANCE LN	FOXGLOVE WAY	1838 SUNDANCE LN	W	$126,485.00
SUNDANCE LN	GRAPEWOOD WAY	PLUMWOOD WAY	E	$69,690.00
SUNDANCE LN	MEADOWREST WAY	BEECHWOOD WAY	E	$58,095.00
SUNDANCE LN	PLUMWOOD WAY	FOXGLOVE WAY	E	$69,840.00
SUNDANCE LN	W CLEVELAND AVE	MEADOWREST WAY	E	$33,495.00

SUNNYDALE ST

Total Cost for Street: $363,520.00

Survey Street	Start Street	End Street	Orientation	Cost
SUNNYDALE ST	2424 SUNNYDALE ST	HEATHERWOOD DR	S	$91,710.00
SUNNYDALE ST	HEATHERWOOD DR	2425 SUNNYDALE ST	N	$95,050.00
SUNNYDALE ST	NATIONAL AVE	SUNNYDALE ST	E	$95,765.00
SUNNYDALE ST	SUNNYDALE ST	NATIONAL AVE	W	$80,995.00

SUNRISE AVE

Total Cost for Street: $2,191,583.50

Survey Street	Start Street	End Street	Orientation	Cost
SUNRISE AVE	ADELAIDE AVE	VINEYARD AVE	N	$243,065.00
SUNRISE AVE	APARTMENTS	S LAKE ST	N	$70,320.00
SUNRISE AVE	DRYSDALE WAY	LILLY ST	N	$230,112.00
SUNRISE AVE	HULL AVE	STINSON AVE	S	$85,260.00
SUNRISE AVE	KNOX AVE	LILLY ST	S	$91,635.00
SUNRISE AVE	LILLY ST	TOZER ST	S	$251,422.50
SUNRISE AVE	MOORE AVE	S A ST	N	$26,190.00
SUNRISE AVE	ROOSEVELT AVE	WALLACE AVE	S	$91,695.00
SUNRISE AVE	S A ST	S LAKE ST	S	$304,060.00
SUNRISE AVE	S B ST	501 S B ST	S	$50,580.00
SUNRISE AVE	S LAKE ST	ROOSEVELT AVE	S	$287,880.00
SUNRISE AVE	STINSON AVE	KNOX AVE	S	$66,640.00
SUNRISE AVE	TOZER ST	DRYSDALE WAY	N	$115,224.00
SUNRISE AVE	VINEYARD AVE	APARTMENTS	N	$178,640.00

SUNRISE AVE	WALLACE AVE	HULL AVE	S	$98,860.00

SUNSET AVE

Total Cost for Street: **$5,831,404.50**

Survey Street	Start Street	End Street	Orientation	Cost
SUNSET AVE	300 SUNSET AVE	FOURTH ST	S	$216,645.00
SUNSET AVE	3290 SUNSET AVE	WOODLANDS DR	S	$137,355.00
SUNSET AVE	43 VIA CERIONI	VIA CERIONI	S	$182,880.00
SUNSET AVE	ACCORNERO AVE	WILLIAMS AVE	S	$60,660.00
SUNSET AVE	DOUBLE TREE WAY	WESTBERRY BVD	N	$268,590.00
SUNSET AVE	EL RANCHO DR	N SCHNOOR AVE	N	$428,259.00
SUNSET AVE	FAIRVIEW AVE	ROTAN AVE	S	$42,435.00
SUNSET AVE	FOSTER AVE	PINE ST	N	$50,400.00
SUNSET AVE	FOURTH ST	PARK LN	N	$161,805.00
SUNSET AVE	GRANADA DR	SUNDANCE LN	S	$420,517.50
SUNSET AVE	LAUREL ST	LINDEN ST	N	$34,390.00
SUNSET AVE	LIBERTY LN	VIA CERIONI	N	$271,855.00
SUNSET AVE	LINDEN ST	N GRANADA DR	N	$53,300.00
SUNSET AVE	MAINBERRY DR	SHANNON AVE	S	$224,205.00
SUNSET AVE	N N ST	500 SUNSET AVE	S	$317,620.00
SUNSET AVE	N SCHNOOR AVE	PAUL AVE	S	$446,820.00
SUNSET AVE	ORCHARD AVE	EL RANCHO DR	N	$115,470.00
SUNSET AVE	PARK LN	FOSTER AVE	N	$130,585.00
SUNSET AVE	PAUL AVE	ACCORNERO AVE	S	$71,895.00
SUNSET AVE	PINE ST	WILLIS AVE	N	$205,170.00
SUNSET AVE	ROTAN AVE	PINE ST	S	$31,695.00
SUNSET AVE	SHANNON AVE	N SCHNOOR AVE	S	$426,960.00
SUNSET AVE	SUNDANCE LN	MAINBERRY DR	S	$146,990.00
SUNSET AVE	VIA CERIONI	WESTBERRY BVD	S	$568,205.00
SUNSET AVE	WESTBERRY BVD	3290 SUNSET AVE	S	$246,375.00
SUNSET AVE	WILLIAMS AVE	WILLIS AVE	S	$162,475.00
SUNSET AVE	WILLIS AVE	FAIRVIEW AVE	S	$94,458.00
SUNSET AVE	WOODLANDS DR	GRANADA DR	S	$313,390.00

SUSAN LN

Total Cost for Street: **$200,625.00**

Survey Street	Start Street	End Street	Orientation	Cost
SUSAN LN	120 SUSAN LN	SONORA ST	S	$63,270.00
SUSAN LN	132 SUSAN LN	124 SUSAN LN	S	$24,795.00
SUSAN LN	SONORA ST	100 ADELL ST	N	$112,560.00

SYCAMORE AVE

Total Cost for Street: **$200,367.50**

Survey Street	Start Street	End Street	Orientation	Cost
SYCAMORE AVE	129 SYCAMORE AVE	123 SYCAMORE AVE	N	$49,850.00
SYCAMORE AVE	614 SYCAMORE AVE	7TH ST	N	$20,557.50
SYCAMORE AVE	S LAKE ST	CLINTON ST	S	$129,960.00

TAFT DR

Total Cost for Street: **$72,315.00**

Survey Street	Start Street	End Street	Orientation	Cost
TAFT DR	CHAPIN ST	TRUMAN DR	N	$34,575.00
TAFT DR	TRUMAN DR	CHAPIN ST	S	$37,740.00

TALISE AVE

Total Cost for Street: **$66,435.00**

Survey Street	Start Street	End Street	Orientation	Cost
TALISE AVE	E ELLIS ST	LA JOLLA CT	W	$37,275.00
TALISE AVE	LA JOLLA WY	E ELLIS ST	E	$29,160.00

TANGERINE AVE

Total Cost for Street: **$863,459.00**

Survey Street	Start Street	End Street	Orientation	Cost
TANGERINE AVE	2020 TANGERINE AVE	MANGO AVE	W	$102,550.00
TANGERINE AVE	2045 TANGERINE AVE	2045 TANGERINE AVE	E	$25,620.00
TANGERINE AVE	GEORGIA AVE	2010 TANGERINE AVE	W	$75,085.00
TANGERINE AVE	GRAPEFRUIT WAY	GEORGIA AVE	E	$129,720.00
TANGERINE AVE	MANGO AVE	2057 TANGERINE AVE	E	$55,800.00
TANGERINE AVE	NAVEL AVE	PARKWOOD AVE	W	$112,434.00
TANGERINE AVE	PARKWOOD AVE	STANFORD AVE	W	$118,440.00
TANGERINE AVE	PERKINS AVE	NAVEL AVE	E	$80,175.00
TANGERINE AVE	SAN CARLOS AVE	SAN JOSE AVE	W	$37,860.00
TANGERINE AVE	SAN JOSE AVE	SAN CARLOS AVE	E	$58,380.00
TANGERINE AVE	STANFORD AVE	PARKWOOD AVE	E	$67,395.00

TAYLOR LANE

Total Cost for Street: **$391,510.00**

Survey Street	Start Street	End Street	Orientation	Cost
TAYLOR LANE	KIMBERLEY LN	MARIE DR	E	$65,995.00
TAYLOR LANE	KIMBERLY DR	PAMELA DR	W	$117,920.00
TAYLOR LANE	MARIE DR	KIMBERLY DR	W	$93,700.00
TAYLOR LANE	PAMELA DR	KIMBERLY DR	E	$113,895.00

TAYLOR ST

Total Cost for Street: **$192,160.00**

Survey Street	Start Street	End Street	Orientation	Cost
TAYLOR ST	1408 TAYLOR ST	134 SARAH ST	S	$16,620.00
TAYLOR ST	SARAH ST	W CLARK ST	E	$41,955.00
TAYLOR ST	SONORA ST	TAYLOR ST	N	$47,925.00
TAYLOR ST	TAYLOR ST	SONORA ST	S	$28,905.00
TAYLOR ST	W CLARK ST	SARAH ST	W	$56,755.00

TERRACE PL

Total Cost for Street: **$32,590.00**

Survey Street	Start Street	End Street	Orientation	Cost
TERRACE PL	809 TERRACE PL	821 TERRACE PL	E	$32,590.00

TEVIN WAY

Total Cost for Street: **$148,695.00**

Survey Street	Start Street	End Street	Orientation	Cost
TEVIN WAY	KIMBERLEY LN	MACADAMIA AVE	E	$78,960.00
TEVIN WAY	MACADAMIA AVE	KIMBERLEY LN	W	$69,735.00

THIRD ST

Total Cost for Street: **$522,900.00**

Survey Street	Start Street	End Street	Orientation	Cost
THIRD ST	1814 THIRD ST	1814 THIRD ST	S	$16,320.00
THIRD ST	WILLIAMS AVE	SCHNOOR AVE	N	$506,580.00

TIBURON WAY

Total Cost for Street: **$365,647.50**

Survey Street	Start Street	End Street	Orientation	Cost
TIBURON WAY	FAIRFIELD WAY	HOLLOW AVE	W	$118,680.00
TIBURON WAY	HAMPTON DR	FAIRFIELD WAY	E	$144,682.50
TIBURON WAY	HOLLOW AVE	HAMPTON DR	W	$102,285.00

TIMBERLINE DR

Total Cost for Street: **$577,937.50**

Survey Street	Start Street	End Street	Orientation	Cost
TIMBERLINE DR	CEDAR CREEK LN	SULTANA DR	W	$154,430.00
TIMBERLINE DR	REN WAY	REN WAY	W	$97,425.00
TIMBERLINE DR	SULTANA DR	CEDAR CREEK LN	E	$92,002.50
TIMBERLINE DR	SUMMER LN	WESTGATE DR	E	$69,570.00

TIMBERLINE DR	WESTGATE DR	REN WAY	W	$101,750.00
TIMBERLINE DR	WINTER WAY	SUMMER LN	E	$62,760.00

TODD ST — Total Cost for Street: $195,335.00

Survey Street	Start Street	End Street	Orientation	Cost
TODD ST	LIBERTY LN	WESTBERRY BVD	S	$100,940.00
TODD ST	WESTBERRY BVD	LIBERTY LN	N	$94,395.00

TOLEDO WAY — Total Cost for Street: $185,402.50

Survey Street	Start Street	End Street	Orientation	Cost
TOLEDO WAY	1427 TOLEDO WAY	SEVILLA ST	N	$25,900.00
TOLEDO WAY	SAN SEBASTIAN WAY	RAYMOND RD	S	$104,527.50
TOLEDO WAY	SEVILLA ST	SAN SEBASTIAN WAY	N	$54,975.00

TOLUCA — Total Cost for Street: $226,437.50

Survey Street	Start Street	End Street	Orientation	Cost
TOLUCA	SEGOVIA CT	LAGUNA WAY	W	$226,437.50

TOLUCA WAY — Total Cost for Street: $226,895.00

Survey Street	Start Street	End Street	Orientation	Cost
TOLUCA WAY	1347 TOLUCA WAY	SEGOVIA CT	E	$152,615.00
TOLUCA WAY	LAGUNA WAY	1333 TOLUCA WAY	E	$74,280.00

TORONADO DR — Total Cost for Street: $251,100.00

Survey Street	Start Street	End Street	Orientation	Cost
TORONADO DR	1209 TORONADO DR	W SHERWOOD WAY	E	$39,868.00
TORONADO DR	E CLEVELAND AVE	1205 TORONADO DR	E	$66,208.00
TORONADO DR	W SHERWOOD WAY	E CLEVELAND AVE	W	$145,024.00

TORRES WAY — Total Cost for Street: $40,329.00

Survey Street	Start Street	End Street	Orientation	Cost
TORRES WAY	809 TORRES WAY	821 TORRES WAY	E	$19,614.00
TORRES WAY	812 TORRES WAY	812 TORRES WAY	W	$5,040.00
TORRES WAY	820 TORRES WAY	820 TORRES WAY	W	$15,675.00

TOSCHI DR — Total Cost for Street: $432,315.00

Survey Street	Start Street	End Street	Orientation	Cost
TOSCHI DR	1115 TOSCHI DR	PEAR TREE DR	E	$9,295.00
TOSCHI DR	ALMOND AVE	PEAR TREE DR	W	$17,085.00
TOSCHI DR	APPLE TREE DR	ORANGE TREE DR	W	$134,175.00
TOSCHI DR	CHERRY TREE DR	APPLE TREE DR	E	$67,055.00
TOSCHI DR	ORANGE TREE DR	CHERRY TREE DR	W	$23,130.00
TOSCHI DR	PEANUT DR	APPLE TREE DR	W	$86,640.00
TOSCHI DR	PEAR TREE DR	PEANUT DR	W	$94,935.00

TOSCHI DRIVE — Total Cost for Street: $99,365.00

Survey Street	Start Street	End Street	Orientation	Cost
TOSCHI DRIVE	DESERT RANCH WAY	MAPLE STREET	E	$39,950.00
TOSCHI DRIVE	MAPLE STREET	DESERT RANCH WAY	W	$59,415.00

TOZER ST — Total Cost for Street: $1,896,451.00

Survey Street	Start Street	End Street	Orientation	Cost
TOZER ST	1426 E YOSEMITE AVE	CLINTON ST	W	$243,033.00
TOZER ST	1490 E YOSEMITE AVE	1490 E YOSEMITE AVE	W	$60,396.00
TOZER ST	1490 TOZER ST	1490 TOZER ST	W	$67,368.00
TOZER ST	1502 E YOSEMITE AVE	E YOSEMITE AVE	E	$78,204.00

TOZER ST	1609 CLINTON ST	125 TOZER ST	E	$243,852.00
TOZER ST	1633 CLINTON ST	1633 CLINTON ST	E	$58,296.00
TOZER ST	CLINTON ST	1633 CLINTON ST	E	$32,193.00
TOZER ST	E ALMOND AVE	LADA AVE	E	$200,760.00
TOZER ST	E YOSEMITE AVE	1426 E YOSEMITE AVE	W	$76,272.00
TOZER ST	LADA AVE	28111 LADA AVE	E	$35,715.00
TOZER ST	MIRA LOMA WAY	E ALMOND AVE	W	$387,550.00
TOZER ST	OLIVE AVE	MIRA LOMA WAY	W	$393,660.00
TOZER ST	TOZER ST	CLINTON ST	E	$19,152.00

TRABON WAY

Total Cost for Street: $322,690.00

Survey Street	Start Street	End Street	Orientation	Cost
TRABON WAY	SUMMER SET LN	DOUBLE TREE WAY	S	$322,690.00

TRAGON ST

Total Cost for Street: $309,455.00

Survey Street	Start Street	End Street	Orientation	Cost
TRAGON ST	PAINTBRUSH DR	SUBURBAN AVE	N	$156,490.00
TRAGON ST	SUBURBAN AVE	PAINTBRUSH DR	S	$152,965.00

TRAIL WAY

Total Cost for Street: $64,020.00

Survey Street	Start Street	End Street	Orientation	Cost
TRAIL WAY	BRIDGE WAY	RD 28	S	$31,440.00
TRAIL WAY	RD 28	BRIDGE WAY	N	$32,580.00

TREVOR CT

Total Cost for Street: $156,180.00

Survey Street	Start Street	End Street	Orientation	Cost
TREVOR CT	STEPHANIE LN	2416 TREVOR CT	N / S	$156,180.00

TREVOR WAY

Total Cost for Street: $663,765.00

Survey Street	Start Street	End Street	Orientation	Cost
TREVOR WAY	2398 TREVOR WAY	N SCHNOOR AVE	S	$337,890.00
TREVOR WAY	SCHNOOR AVE	STEPHANIE LN	N	$325,875.00

TRIVISO AVE

Total Cost for Street: $207,615.00

Survey Street	Start Street	End Street	Orientation	Cost
TRIVISO AVE	CHATOM WY	NAPOLI ST	N	$38,715.00
TRIVISO AVE	NAPOLI ST	POMPEI ST	S	$112,365.00
TRIVISO AVE	POMPEI ST	CHATOM WY	N	$56,535.00

TRUMAN DR

Total Cost for Street: $498,919.00

Survey Street	Start Street	End Street	Orientation	Cost
TRUMAN DR	EISENHOWER LN	PIERCE LN	W	$149,094.00
TRUMAN DR	HOOVER AVE	TYLER LN	W	$98,530.00
TRUMAN DR	PIERCE LN	POLK AVE	E	$54,960.00
TRUMAN DR	POLK AVE	EISENHOWER LN	E	$69,910.00
TRUMAN DR	TAFT DR	HOOVER AVE	E	$46,970.00
TRUMAN DR	TYLER LN	TAFT DR	E	$79,455.00

TULARE ST

Total Cost for Street: $1,017,626.00

Survey Street	Start Street	End Street	Orientation	Cost
TULARE ST	1200 E SHERWOOD WAY	E SHERWOOD WAY	E	$38,280.00
TULARE ST	1509 TULARE ST	1608 TULARE ST	E	$139,616.00
TULARE ST	1608 TULARE ST	E CLARK ST	W	$36,660.00
TULARE ST	26 TULARE ST	26 TULARE ST	W	$29,952.00
TULARE ST	E CLARK ST	1128 E CLARK ST	W	$42,560.00
TULARE ST	E CLEVELAND AVE	1200 TULARE ST	E	$113,936.00

TULARE ST	E LINCOLN AVE	E CLEVELAND AVE	E	$372,420.00
TULARE ST	E RIVERSIDE DR	E LINCOLN AVE	E	$93,735.00
TULARE ST	E SHERWOOD WAY	WESSMITH WAY	E	$61,392.00
TULARE ST	GARFIELD AVE	1128 TULARE ST	W	$43,875.00
TULARE ST	WESSMITH WAY	WRENWOOD WAY	E	$35,312.00
TULARE ST	WRENWOOD WAY	1505 TULARE ST	E	$9,888.00

TYLER LN

Total Cost for Street: **$330,860.00**

Survey Street	Start Street	End Street	Orientation	Cost
TYLER LN	ADAMS AVE	TRUMAN DR	S	$54,970.00
TYLER LN	COOLIDGE ST	MONROE AVE	N	$73,860.00
TYLER LN	MADISON DR	ADAMS AVE	S	$95,125.00
TYLER LN	MONROE AVE	MADISON DR	N	$63,510.00
TYLER LN	TRUMAN DR	COOLIDGE ST	N	$43,395.00

UMBER DR

Total Cost for Street: **$446,910.00**

Survey Street	Start Street	End Street	Orientation	Cost
UMBER DR	AZURE DR	SEPIA CT	W	$281,475.00
UMBER DR	CURB RAMP	AZURE DR	N	$90,375.00
UMBER DR	INDIGO DR	CURB RAMP	N	$75,060.00

UNIVERSITY AVE

Total Cost for Street: **$938,152.50**

Survey Street	Start Street	End Street	Orientation	Cost
UNIVERSITY AVE	CLAREMONT DR	ORCHARD AVE	S	$43,725.00
UNIVERSITY AVE	HARVARD AVE	WILLIAMS AVE	N	$179,370.00
UNIVERSITY AVE	HAYES CT	CLAREMONT DR	S	$39,940.00
UNIVERSITY AVE	IMPERIAL DR	ROYAL DR	S	$55,710.00
UNIVERSITY AVE	N SCHNOOR AVE	HAYES CT	S	$121,077.50
UNIVERSITY AVE	ORCHARD AVE	WILLIAMS AVE	S	$256,440.00
UNIVERSITY AVE	ROYAL DR	N SCHNOOR AVE	S	$31,035.00
UNIVERSITY AVE	WILLIAMS AVE	WILLIS AVE	S	$100,505.00
UNIVERSITY AVE	WILLIS AVE	HARVARD AVE	S	$110,350.00

VALENCIA AVE

Total Cost for Street: **$1,254,733.50**

Survey Street	Start Street	End Street	Orientation	Cost
VALENCIA AVE	GEORGIA AVE	SAN BRUNO AVE	SE	$32,550.00
VALENCIA AVE	GEORGIA CT	GEORGIA AVE	NW	$15,780.00
VALENCIA AVE	NAVEL AVE	PERKINS AVE	W	$155,439.00
VALENCIA AVE	PARKWOOD AVE	STANFORD AVE	W	$117,990.00
VALENCIA AVE	PECAN AVE	SAUNDERS AVE	W	$55,920.00
VALENCIA AVE	PERKINS AVE	PARKWOOD AVE	W	$127,227.00
VALENCIA AVE	SAN BRUNO AVE	SAN DIEGO AVE	SE	$25,200.00
VALENCIA AVE	SAN CARLOS AVE	SAN JOSE AVE	W	$150,067.50
VALENCIA AVE	SAN DIEGO AVE	SAN RAMON AVE	SE	$56,370.00
VALENCIA AVE	SAN JOSE AVE	SAN DIEGO AVE	W	$158,565.00
VALENCIA AVE	SAN RAMON AVE	SAN JOSE AVE	E	$78,675.00
VALENCIA AVE	SAUNDERS AVE	NAVEL AVE	W	$126,600.00
VALENCIA AVE	STANFORD AVE	SAN CARLOS AVE	W	$154,350.00

VALLEY WAY

Total Cost for Street: **$640,350.00**

Survey Street	Start Street	End Street	Orientation	Cost
VALLEY WAY	2412 VALLEY WAY	WILLOW CT	E	$25,890.00
VALLEY WAY	DRIFTWOOD DR	RIVERVIEW DR	E	$124,000.00
VALLEY WAY	HOLIDAY CT	NATIONAL AVE	E	$78,900.00

VALLEY WAY	NATIONAL AVE	304 VALLEY WAY	W	$153,850.00
VALLEY WAY	PINEWOOD DR	DRIFTWOOD DR	W	$100,120.00
VALLEY WAY	RIVERVIEW DR	PINEWOOD DR	W	$94,320.00
VALLEY WAY	WILLOW CT	HOLIDAY CT	E	$63,270.00

VARBELLA PK

Total Cost for Street: $579,595.00

Survey Street	Start Street	End Street	Orientation	Cost
VARBELLA PK	LA PERLA LN	VARBELLA WAY	E	$141,160.00
VARBELLA PK	LAS CASAS LN	LA PERLA LN	E	$85,260.00
VARBELLA PK	LOS ARCOS LN	LAS CASAS LN	E	$77,355.00
VARBELLA PK	VARBELLA WAY	LOS ARCOS LN	W	$275,820.00

VARBELLA WAY

Total Cost for Street: $75,420.00

Survey Street	Start Street	End Street	Orientation	Cost
VARBELLA WAY	ROOSEVELT AVE	VARBELLA PK	S	$36,180.00
VARBELLA WAY	VARBELLA PK	ROOSEVELT AVE	N	$39,240.00

VENTURI AVE

Total Cost for Street: $98,340.00

Survey Street	Start Street	End Street	Orientation	Cost
VENTURI AVE	1808 VENTURI AVE	ORCHARD AVE	S	$98,340.00

VENTURI CT

Total Cost for Street: $102,780.00

Survey Street	Start Street	End Street	Orientation	Cost
VENTURI CT	2497 VENTURI CT	MAINBERRY DR	W/S	$79,380.00
VENTURI CT	MAINBERRY DR	2485 VENTURI CT	N	$23,400.00

VERDE MESA WAY

Total Cost for Street: $323,737.50

Survey Street	Start Street	End Street	Orientation	Cost
VERDE MESA WAY	CORONA DR	RANCHO SANTA FE DR	N	$63,733.50
VERDE MESA WAY	RANCHO SANTA FE DR	SAN GABRIEL DR	S	$171,480.00
VERDE MESA WAY	SAN GABRIEL DR	CORONA DR	N	$88,524.00

VIA CAPITOLA

Total Cost for Street: $179,640.00

Survey Street	Start Street	End Street	Orientation	Cost
VIA CAPITOLA	3714 VIA CAPITOLA	VIA CERIONI	S	$11,040.00
VIA CAPITOLA	CAITLAN DRIVE	3714 VIA CAPITOLA	S	$83,700.00
VIA CAPITOLA	VIA CERIONI	CAITLAN DRIVE	N	$84,900.00

VIA CERIONI

Total Cost for Street: $368,586.00

Survey Street	Start Street	End Street	Orientation	Cost
VIA CERIONI	45 VIA CERIONI	SUNSET AVE	E	$39,996.00
VIA CERIONI	SUNSET AVE	VIA DE ORO	E	$153,405.00
VIA CERIONI	VIA CAPITOLA	VIA SANTA BARBARA	W	$67,635.00
VIA CERIONI	VIA DE ORO	VIA CAPITOLA	W	$81,660.00
VIA CERIONI	VIA SANTA BARBARA	SUNSET AVE	W	$25,890.00

VIA DE ORO

Total Cost for Street: $210,070.00

Survey Street	Start Street	End Street	Orientation	Cost
VIA DE ORO	CAITLAN DRIVE	VIA CERIONI	S	$93,375.00
VIA DE ORO	VIA CERIONI	CAITLAN DR	N	$116,695.00

VIA SANTA BARBARA

Total Cost for Street: $164,465.00

Survey Street	Start Street	End Street	Orientation	Cost
VIA SANTA BARBARA	CAITLAN DRIVE	VIA CERIONI	S	$85,955.00
VIA SANTA BARBARA	VIA CERIONI	CAITLAN DRIVE	N	$78,510.00

VICTORY LANE

Total Cost for Street: **$230,040.00**

Survey Street	Start Street	End Street	Orientation	Cost
VICTORY LANE	INDEPENDENCE DRIVE	PECAN AVE	W	$112,800.00
VICTORY LANE	PECAN AVE	INDEPENDENCE DRIVE	E	$117,240.00

VINEYARD AVE

Total Cost for Street: **$422,011.00**

Survey Street	Start Street	End Street	Orientation	Cost
VINEYARD AVE	232 VINEYARD AVE	236 VINEYARD AVE	SW	$5,560.00
VINEYARD AVE	310 VINEYARD AVE	CLINTON ST	SW	$24,180.00
VINEYARD AVE	406 VINEYARD AVE	400 VINEYARD AVE	NE	$16,920.00
VINEYARD AVE	409 VINEYARD AVE	409 409 VINEYARD AVE	NE	$12,840.00
VINEYARD AVE	635 6TH ST	6TH ST	SW	$29,340.00
VINEYARD AVE	635 VINEYARD AVE	619 VINEYARD AVE	NE	$52,168.00
VINEYARD AVE	6TH ST	E YOSEMITE AVE	NE	$127,340.00
VINEYARD AVE	CLINTON ST	406 VINEYARD AVE	SW	$103,080.00
VINEYARD AVE	E YOSEMITE AVE	632 E YOSEMITE AVE	SW	$20,880.00
VINEYARD AVE	VINEYARD AVE	CLINTON ST	W	$8,748.00
VINEYARD AVE	WASHINGTON ST	233 VINEYARD AVE	NE	$20,955.00

W 1ST ST

Total Cost for Street: **$114,555.00**

Survey Street	Start Street	End Street	Orientation	Cost
W 1ST ST	117 W 1ST ST	N G ST	NW	$23,940.00
W 1ST ST	N G ST	525 N G ST	SE	$9,855.00
W 1ST ST	N GATEWAY DR	608 N GATEWAY DR	NW	$36,480.00
W 1ST ST	N H ST	214 W 1ST ST	SE	$44,280.00

W 2ND ST

Total Cost for Street: **$30,420.00**

Survey Street	Start Street	End Street	Orientation	Cost
W 2ND ST	109 W 2ND ST	109 W 2ND ST	NW	$30,420.00

W 4TH ST

Total Cost for Street: **$210,384.00**

Survey Street	Start Street	End Street	Orientation	Cost
W 4TH ST	1412 W 4TH ST	1404 W 4TH ST	S	$5,820.00
W 4TH ST	FREEWAY ENTRANCE	FREEWAY EXIT	SE	$25,260.00
W 4TH ST	FREEWAY EXIT	N G ST	SE	$90,180.00
W 4TH ST	N G ST	N GATEWAY DR	SE	$57,960.00
W 4TH ST	N H ST	N I ST	NW	$18,000.00
W 4TH ST	N I ST	FREEWAY ENTRANCE	SE	$5,700.00
W 4TH ST	ROTAN AVE	1416 W 4TH ST	S	$7,464.00

W CENTRAL AVE

Total Cost for Street: **$532,797.00**

Survey Street	Start Street	End Street	Orientation	Cost
W CENTRAL AVE	115 W CENTRAL AVE	117 W CENTRAL AVE	N	$5,615.00
W CENTRAL AVE	117 W CENTRAL AVE	125 W CENTRAL AVE	N	$16,575.00
W CENTRAL AVE	130 W CENTRAL AVE	N D ST	S	$54,585.00
W CENTRAL AVE	610 N E ST	N E ST	S	$12,720.00
W CENTRAL AVE	801 N GATEWAY DR	N GATEWAY DR	N	$46,935.00
W CENTRAL AVE	ARAM AVE	CENTRAL CT	N	$40,284.00
W CENTRAL AVE	CENTRAL CT	RIVERVIEW DR	N	$52,969.50
W CENTRAL AVE	CENTRAL PL	ARAM AVE	S	$147,036.00
W CENTRAL AVE	JOY ST	ARAM AVE	N	$33,723.00
W CENTRAL AVE	N E ST	ALLEY	S	$21,555.00
W CENTRAL AVE	N G ST	120 W CENTRAL AVE	S	$1,320.00
W CENTRAL AVE	N GATEWAY DR	713 W CENTRAL AVE	S	$32,715.00

W CENTRAL AVE	ORCHARD AVE	CENTRAL PL	S	$51,212.50
W CENTRAL AVE	RIVERVIEW DR	CENTRAL PL	N	$15,552.00

W CLARK ST

Total Cost for Street: **$528,506.00**

Survey Street	Start Street	End Street	Orientation	Cost
W CLARK ST	117 W CLARK ST	133 W CLARK ST	N	$64,938.00
W CLARK ST	1410 COUNTRY CLUB DR	COUNTRY CLUB DR	S	$17,640.00
W CLARK ST	1496 TAYLOR ST	TAYLOR ST	S	$43,980.00
W CLARK ST	1520 COUNTRY CLUB DR	1520 COUNTRY CLUB DR	N	$2,400.00
W CLARK ST	322 W CLARK ST	OWENS ST	S	$78,000.00
W CLARK ST	COUNTRY CLUB DR	330 W CLARK ST	S	$231,344.00
W CLARK ST	SONORA ST	113 W CLARK ST	N	$33,030.00
W CLARK ST	TAYLOR ST	SONORA ST	S	$57,174.00

W CLEVELAND AVE

Total Cost for Street: **$4,816,242.50**

Survey Street	Start Street	End Street	Orientation	Cost
W CLEVELAND AVE	1030 N GATEWAY DR	1030 N GATEWAY DR	S	$54,880.00
W CLEVELAND AVE	1850 W CLEVELAND AVE	1850 W CLEVELAND AVE	S	$305,376.00
W CLEVELAND AVE	1915 AVE 15 1/2	1915 AVE 15 1/2	N	$319,696.00
W CLEVELAND AVE	1930 W CLEVELAND AVE	1900 W CLEVELAND AVE	S	$296,160.00
W CLEVELAND AVE	1977 W CLEVELAND AVE	1977 W CLEVELAND AVE	N	$96,780.00
W CLEVELAND AVE	2020 W CLEVELAND AVE	2020 W CLEVELAND AVE	S	$265,656.00
W CLEVELAND AVE	2037 W CLEVELAND AVE	2037 W CLEVELAND AVE	N	$115,920.00
W CLEVELAND AVE	2147 W CLEVELAND AVE	2147 W CLEVELAND AVE	N	$46,995.00
W CLEVELAND AVE	2201 W CLEVELAND AVE	N SCHNOOR AVE	N	$130,395.00
W CLEVELAND AVE	2220 W CLEVELAND AVE	2180 W CLEVELAND AVE	S	$177,984.00
W CLEVELAND AVE	2310 W CLEVELAND AVE	N SCHNOOR AVE	S	$53,190.00
W CLEVELAND AVE	2350 W CLEVELAND AVE	2350 W CLEVELAND AVE	S	$65,895.00
W CLEVELAND AVE	2377 W CLEVELAND AVE	2339 W CLEVELAND AVE	N	$100,650.00
W CLEVELAND AVE	2401 W CLEVELAND AVE	ASPEN LN	N	$61,080.00
W CLEVELAND AVE	3300 CAMINO CT	N WESTBERRY BLV	S	$131,655.00
W CLEVELAND AVE	ASPEN LN	SUNDANCE LN	N	$281,767.50
W CLEVELAND AVE	CURB RAMP	CURB RAMP	S	$258,912.00
W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	S	$1,299,570.00
W CLEVELAND AVE	GRANADA DR	27 EAST LOOP	S	$304,200.00
W CLEVELAND AVE	N GATEWAY DR	CURB RAMP	N	$125,412.00
W CLEVELAND AVE	N SCHNOOR AVE	2290 AVE 15 1/2	S	$113,094.00
W CLEVELAND AVE	N WESTBERRY BLV	GLADE AVE	S	$150,345.00
W CLEVELAND AVE	STEPHANIE LN	PARKING LOT ENTRANCE	S	$30,390.00
W CLEVELAND AVE	SUNDANCE LN	FOXGLOVE WAY	N	$30,240.00

W KENNEDY ST

Total Cost for Street: **$2,340.00**

Survey Street	Start Street	End Street	Orientation	Cost
W KENNEDY ST	2140 W KENNEDY ST	2140 W KENNEDY ST	S	$2,340.00

W PARK DR

Total Cost for Street: **$713,100.00**

Survey Street	Start Street	End Street	Orientation	Cost
W PARK DR	2427 LAUREL ST	2411 LAUREL ST	N	$33,315.00
W PARK DR	2434 W PARK DR	2436 W PARK DR	S	$12,540.00
W PARK DR	803 ROYAL DR	ROYAL DR	N	$39,660.00
W PARK DR	LINDEN ST	779 W PARK DR	S	$35,460.00
W PARK DR	MAINBERRY DR	N SCHNOOR AVE	S	$334,055.00
W PARK DR	ROYAL DR	SHANNON AVE	N	$113,810.00

W PARK DR	SHANNON AVE	MAINBERRY DR	N	$144,260.00

W ROBERTS AVE

Total Cost for Street: $237,200.00

Survey Street	Start Street	End Street	Orientation	Cost
W ROBERTS AVE	701 N H ST	N H ST	SE	$68,220.00
W ROBERTS AVE	N G ST	N GATEWAY DR	SE	$37,970.00
W ROBERTS AVE	N GATEWAY DR	N G ST	NW	$113,340.00
W ROBERTS AVE	N I ST	720 N I ST	N	$17,670.00

W SHERWOOD WAY

Total Cost for Street: $2,632,189.00

Survey Street	Start Street	End Street	Orientation	Cost
W SHERWOOD WAY	111 W SHERWOOD WAY	111 W SHERWOOD WAY	N	$67,680.00
W SHERWOOD WAY	1226 W SHERWOOD WAY	MERCED ST	S	$36,864.00
W SHERWOOD WAY	1305 COUNTRY CLUB DR	COUNTRY CLUB DR	N	$55,605.00
W SHERWOOD WAY	205 SHERWOOD WAY	SONORA ST	N	$62,096.00
W SHERWOOD WAY	338 W SHERWOOD WAY	111 W SHERWOOD WAY	N	$113,040.00
W SHERWOOD WAY	901 W SHERWOOD WAY	N LAKE ST	N	$3,480.00
W SHERWOOD WAY	AUSTIN AVE	N LAKE ST	S	$345,219.00
W SHERWOOD WAY	COUNTRY CLUB DR	SHERWOOD POINTE	S	$383,464.00
W SHERWOOD WAY	DAVIS ST	PHILIP ST	S	$67,740.00
W SHERWOOD WAY	DELLAVALLE AVE	AUSTIN AVE	S	$167,675.00
W SHERWOOD WAY	N D ST	NEBRASKA AVE	S	$150,680.00
W SHERWOOD WAY	N LAKE ST	900 W SHERWOOD WAY	S	$331,050.00
W SHERWOOD WAY	NEBRASKA AVE	DELLAVALLE AVE	S	$124,325.00
W SHERWOOD WAY	NICOLA WAY	207 SHERWOOD WAY	N	$31,596.00
W SHERWOOD WAY	OWENS ST	TORONADO DR	S	$49,845.00
W SHERWOOD WAY	PHILIP ST	SONORA ST	S	$84,000.00
W SHERWOOD WAY	ROGERS ST	1225 ROGERS ST	S	$41,100.00
W SHERWOOD WAY	SHERWOOD POINTE	OWENS ST	S	$141,135.00
W SHERWOOD WAY	SONORA ST	N D ST	S	$298,855.00
W SHERWOOD WAY	TORONADO DR	DAVIS ST	S	$76,740.00

W SOUTH ST

Total Cost for Street: $1,287,765.00

Survey Street	Start Street	End Street	Orientation	Cost
W SOUTH ST	402 E SOUTH ST	NEBRASKA ST	S	$42,840.00
W SOUTH ST	509 E SOUTH ST	N D ST	N	$172,995.00
W SOUTH ST	AUSTIN AVE	N LAKE ST	S	$202,363.00
W SOUTH ST	BLOKER ST	CUTTING ST	N	$43,644.00
W SOUTH ST	COLUMBIA ST	SIERRA ST	S	$116,393.00
W SOUTH ST	CUTTING ST	AUSTIN AVE	N	$28,752.00
W SOUTH ST	DELLAVALLE AVE	AUSTIN AVE	S	$85,234.00
W SOUTH ST	E SOUTH ST	COLUMBIA ST	N	$89,589.00
W SOUTH ST	N D ST	E SOUTH ST	N	$28,305.00
W SOUTH ST	NEBRASKA ST	DELLAVALLE AVE	S	$63,628.00
W SOUTH ST	SHARON BVD	SONORA ST	S	$117,177.00
W SOUTH ST	SIERRA ST	N D ST	S	$71,130.00
W SOUTH ST	SONORA ST	COLUMBIA ST	S	$181,975.00
W SOUTH ST	TORRES WAY	SHARON BVD	N	$43,740.00

W YOSEMITE AVE

Total Cost for Street: $2,003,053.00

Survey Street	Start Street	End Street	Orientation	Cost
W YOSEMITE AVE	N G ST	N I ST	NW	$182,515.00
W YOSEMITE AVE	N GATEWAY DR	N G ST	NW	$79,326.00

W YOSEMITE AVE	N J ST	N K ST	NW	$90,378.00
W YOSEMITE AVE	N K ST	N L ST	NW	$71,940.00
W YOSEMITE AVE	N L ST	N M ST	NW	$70,200.00
W YOSEMITE AVE	N M ST	N N ST	NW	$118,854.00
W YOSEMITE AVE	N N ST	N O ST	NW	$72,414.00
W YOSEMITE AVE	N O ST	N P ST	NW	$33,300.00
W YOSEMITE AVE	N P ST	N Q ST	NW	$131,616.00
W YOSEMITE AVE	N Q ST	OLIVE AVE	NW	$59,736.00
W YOSEMITE AVE	OLIVE AVE	S Q ST	SE	$42,240.00
W YOSEMITE AVE	S H ST	S GATEWAY DR	SE	$253,983.00
W YOSEMITE AVE	S I ST	S H ST	SE	$103,160.00
W YOSEMITE AVE	S J ST	S I ST	SE	$107,658.00
W YOSEMITE AVE	S K ST	S J ST	SE	$114,210.00
W YOSEMITE AVE	S L ST	S K ST	SE	$113,904.00
W YOSEMITE AVE	S M ST	S L ST	SE	$95,394.00
W YOSEMITE AVE	S N ST	S M ST	SE	$65,124.00
W YOSEMITE AVE	S O ST	S N ST	SE	$92,754.00
W YOSEMITE AVE	S P ST	S O ST	SE	$74,772.00
W YOSEMITE AVE	S Q ST	S P ST	SE	$29,575.00

WALLACE AVE

Total Cost for Street: **$803,735.00**

Survey Street	Start Street	End Street	Orientation	Cost
WALLACE AVE	305 WALLACE AVE	S LAKE ST	E	$108,350.00
WALLACE AVE	A ST	288 WALLACE AVE	W	$64,510.00
WALLACE AVE	OLIVE AVE	OLIVE AVE	S	$141,580.00
WALLACE AVE	S A ST	301 WALLACE AVE	E	$23,295.00
WALLACE AVE	S LAKE ST	A ST	W	$267,330.00
WALLACE AVE	STREET END	A ST	E	$73,880.00
WALLACE AVE	SUNRISE AVE	S LAKE ST	W	$124,790.00

WALNUT ST

Total Cost for Street: **$65,280.00**

Survey Street	Start Street	End Street	Orientation	Cost
WALNUT ST	427 WALNUT ST	MONTEREY ST	S	$65,280.00

WASHINGTON CT

Total Cost for Street: **$110,810.50**

Survey Street	Start Street	End Street	Orientation	Cost
WASHINGTON CT	320 WASHINGTON CT	WASHINGTON ST	NE	$67,340.00
WASHINGTON CT	WASHINGTON AVE	304 WASHINGTON CT	SW	$21,560.00
WASHINGTON CT	WASHINGTON ST	320 WASHINGTON CT	SW	$21,910.50

WASHINGTON ST

Total Cost for Street: **$299,281.50**

Survey Street	Start Street	End Street	Orientation	Cost
WASHINGTON ST	1009 WASHINGTON ST	1001 WASHINGTON ST	NW	$10,935.00
WASHINGTON ST	1014 WASHINGTON ST	WASHINGTON CT	SE	$67,035.00
WASHINGTON ST	233 VINEYARD AVE	VINEYARD AVE	NW	$18,855.00
WASHINGTON ST	718 WASHINGTON ST	720 WASHINGTON ST	SE	$30,924.00
WASHINGTON ST	736 WASHINGTON ST	LILLY ST	SE	$40,800.00
WASHINGTON ST	LILLY ST	820 WASHINGTON ST	SE	$45,300.00
WASHINGTON ST	MAGNOLIA ST	911 WASHINGTON ST	NW	$3,150.00
WASHINGTON ST	MALONE ST	836 WASHINGTON ST	SE	$51,847.50
WASHINGTON ST	WASHINGTON CT	301 WASHINGTON ST	SE	$30,435.00

WATT ST

Total Cost for Street: **$168,390.00**

Survey Street	Start Street	End Street	Orientation	Cost

WATT ST	CHESTNUT AVE	PECAN AVE	W	$83,100.00
WATT ST	PECAN AVE	CHESTNUT AVE	E	$85,290.00

WAWONA CT

Total Cost for Street: $78,915.00

Survey Street	Start Street	End Street	Orientation	Cost
WAWONA CT	MONTEREY ST	MONTEREY ST	N/W/	$78,915.00

WESSMITH WAY

Total Cost for Street: $784,357.50

Survey Street	Start Street	End Street	Orientation	Cost
WESSMITH WAY	721 WESSMITH WAY	AUSTIN AVE	N	$66,188.00
WESSMITH WAY	AUSTIN AVE	N LAKE ST	S	$155,312.00
WESSMITH WAY	BARCELONA WAY	FOUNTAIN WAY	N	$45,948.00
WESSMITH WAY	FOUNTAIN WAY	BARCELONA WAY	S	$234,384.50
WESSMITH WAY	N LAKE ST	725 WESSMITH WAY	N	$45,303.00
WESSMITH WAY	TULARE ST	FOUNTAIN WAY	S	$237,222.00

WESTBERRY BLVD

Total Cost for Street: $24,750.00

Survey Street	Start Street	End Street	Orientation	Cost
WESTBERRY BLVD	REN WAY	258 WESTBERRY BLVD	W	$24,750.00

WESTBERRY BVD

Total Cost for Street: $3,333,024.00

Survey Street	Start Street	End Street	Orientation	Cost
WESTBERRY BVD	3245 HAMPTON DR	HOLLOW AVE	E	$110,235.00
WESTBERRY BVD	3290 SUNSET AVE	SUNSET AVE	E	$25,025.00
WESTBERRY BVD	500 N WESTBERRY BVD	500 N WESTBERRY BVD	E	$14,580.00
WESTBERRY BVD	AVE 14	REN WAY	E	$86,070.00
WESTBERRY BVD	BARON ST	SUNSET AVE	W	$35,647.50
WESTBERRY BVD	CAMBRIA AVE	WESTGATE DR	W	$41,670.00
WESTBERRY BVD	COMMON WAY	FORUM WAY	W	$227,647.50
WESTBERRY BVD	CROWN LN	DOUBLE TREE WAY	E	$163,792.50
WESTBERRY BVD	DOUBLE TREE WAY	TODD ST	W	$295,035.00
WESTBERRY BVD	FAIRFIELD WAY	FAIRWAY AVE	E	$221,055.00
WESTBERRY BVD	FAIRWAY AVE	FORUM WAY	E	$187,509.00
WESTBERRY BVD	FORUM WAY	FAIRWAY AVE	W	$174,420.00
WESTBERRY BVD	GAMAY AVE	3073 WESTBERRY BVD	E	$3,855.00
WESTBERRY BVD	HOLLOW AVE	FAIRFIELD WAY	E	$65,895.00
WESTBERRY BVD	KIMMEL AVE	CAMBRIA AVE	W	$142,470.00
WESTBERRY BVD	MERLOT AVE	GAMAY AVE	E	$49,175.00
WESTBERRY BVD	REN WAY	WESTGATE DR	E	$132,615.00
WESTBERRY BVD	RIVERVIEW DR	DOUBLE TREE WAY	W	$253,470.00
WESTBERRY BVD	STATE ST	BARON ST	W	$64,275.00
WESTBERRY BVD	SUMMER LN	REN WAY	W	$103,740.00
WESTBERRY BVD	SUNSET AVE	KIMMEL AVE	W	$237,532.50
WESTBERRY BVD	TIMBERLINE DR	500 N WESTBERRY BVD	E	$75,195.00
WESTBERRY BVD	TODD ST	STATE ST	W	$64,500.00
WESTBERRY BVD	W ALMOND AVE	MERLOT AVE	E	$67,715.00
WESTBERRY BVD	W CLEVELAND AVE	COMMON WAY	W	$140,640.00
WESTBERRY BVD	WESTGATE DR	SUMMER LN	W	$349,260.00

WESTGATE DR

Total Cost for Street: $444,837.50

Survey Street	Start Street	End Street	Orientation	Cost
WESTGATE DR	3119 WESTGATE DR	TIMBERLINE DR	N	$93,080.00
WESTGATE DR	KENT DR	WESTBERRY BVD	S	$86,217.50
WESTGATE DR	TIMBERLINE DR	3120 WESTGATE DR	S	$101,200.00

WESTGATE DR	WESTBERRY BVD	TIMBERLINE DR	S	$164,340.00

WILLIAMS AVE — Total Cost for Street: $628,909.00

Survey Street	Start Street	End Street	Orientation	Cost
WILLIAMS AVE	1688 WILLIAMS AVE	UNIVERSITY AVE	E	$38,880.00
WILLIAMS AVE	1801 HOWARD RD	HOWARD RD	W	$14,700.00
WILLIAMS AVE	526 WILLIAMS AVE	526 WILLIAMS AVE	W	$11,010.00
WILLIAMS AVE	529 WILLIAMS AVE	SUNSET AVE	E	$36,780.00
WILLIAMS AVE	FIFTH ST	211 WILLIAMS AVE	E	$12,036.00
WILLIAMS AVE	HOWARD RD	109 WILLIAMS AVE	E	$90,118.00
WILLIAMS AVE	JEFFERSON AVE	PRINCETON AVE	W	$60,060.00
WILLIAMS AVE	NATIONAL AVE	THIRD ST	W	$146,460.00
WILLIAMS AVE	PRINCETON AVE	UNIVERSITY AVE	W	$123,075.00
WILLIAMS AVE	UNIVERSITY AVE	824 WILLIAMS AVE	W	$95,790.00

WILLIS AVE — Total Cost for Street: $70,380.00

Survey Street	Start Street	End Street	Orientation	Cost
WILLIS AVE	1564 WILLIAMS AVE	UNIVERSITY AVE	E	$36,420.00
WILLIS AVE	UNIVERSITY AVE	824 WILLIS AVE	W	$33,960.00

WILLOW CT — Total Cost for Street: $93,960.00

Survey Street	Start Street	End Street	Orientation	Cost
WILLOW CT	VALLEY WAY	VALLEY WAY	S/E/	$93,960.00

WILSON AVE — Total Cost for Street: $299,006.00

Survey Street	Start Street	End Street	Orientation	Cost
WILSON AVE	117 WILSON AVE	DAVIS ST	N	$65,829.00
WILSON AVE	200 WILSON AVE	DAVIS ST	S	$1,620.00
WILSON AVE	309 WILSON AVE	309 WILSON AVE	N	$1,500.00
WILSON AVE	316 WILSON AVE	312 WILSON AVE	S	$17,575.00
WILSON AVE	317 WILSON AVE	317 WILSON AVE	N	$6,880.00
WILSON AVE	DAVIS ST	OWENS ST	N	$142,968.00
WILSON AVE	SHARON BVD	322 WILSON AVE	S	$62,634.00

WINDSOX CT — Total Cost for Street: $83,950.00

Survey Street	Start Street	End Street	Orientation	Cost
WINDSOX CT	PAINTBRUSH DR	PAINTBRUSH DR	N / S	$83,950.00

WINTER WAY — Total Cost for Street: $556,580.00

Survey Street	Start Street	End Street	Orientation	Cost
WINTER WAY	CREEK DR	TIMBERLINE DR	N	$78,135.00
WINTER WAY	DOUBLE TREE WAY	WOLFTRAP ST	S	$73,635.00
WINTER WAY	KENT DR	KENT WAY	N	$27,990.00
WINTER WAY	KENT WAY	ZAK WAY	S	$133,570.00
WINTER WAY	TIMBERLINE DR	CREEK DR	S	$51,410.00
WINTER WAY	WOLFTRAP ST	DOUBLE TREE WAY	N	$76,520.00
WINTER WAY	ZAK WAY	KENT DR	N	$115,320.00

WOLFTRAP CT — Total Cost for Street: $139,980.00

Survey Street	Start Street	End Street	Orientation	Cost
WOLFTRAP CT	RIVERVIEW DR	RIVERVIEW DR	W /	$139,980.00

WOLFTRAP ST — Total Cost for Street: $156,390.00

Survey Street	Start Street	End Street	Orientation	Cost
WOLFTRAP ST	REN WAY	WINTER WAY	E	$67,695.00
WOLFTRAP ST	SUMMER LN	321 SUMMER LN	E	$26,655.00

WOLFTRAP ST	WINTER WAY	REN WAY	W	$62,040.00

WOODLANDS CT

Total Cost for Street: **$190,245.00**

Survey Street	Start Street	End Street	Orientation	Cost
WOODLANDS CT	WOODLANDS DR	WOODLANDS DR	S/E/	$190,245.00

WOODLANDS DR

Total Cost for Street: **$442,475.00**

Survey Street	Start Street	End Street	Orientation	Cost
WOODLANDS DR	FOREST CT	WOODLANDS CT	W	$95,115.00
WOODLANDS DR	FOREST LN	HILLCREST CT	E	$84,570.00
WOODLANDS DR	HILLCREST CT	FOREST CT	W	$137,220.00
WOODLANDS DR	SUNSET AVE	HILLCREST CT	W	$41,040.00
WOODLANDS DR	WOODLANDS CT	FOREST LN	E	$84,530.00

WRENWOOD WAY

Total Cost for Street: **$431,995.00**

Survey Street	Start Street	End Street	Orientation	Cost
WRENWOOD WAY	FOUNTAIN WAY	KERN ST	N	$175,868.00
WRENWOOD WAY	KERN ST	TULARE ST	N	$53,436.00
WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	S	$202,691.00

YEAGER RD

Total Cost for Street: **$86,660.00**

Survey Street	Start Street	End Street	Orientation	Cost
YEAGER RD	AIRPORT DR	3051 AIRPORT DR	S	$86,660.00

ZAK WAY

Total Cost for Street: **$556,542.50**

Survey Street	Start Street	End Street	Orientation	Cost
ZAK WAY	491ZAK WAY	473 ZAK WAY	E	$25,380.00
ZAK WAY	AVALON AVE	KELSEY LN	W	$79,935.00
ZAK WAY	CAMBRIA AVE	455 ZAK WAY	E	$62,902.50
ZAK WAY	DIANE WAY	CAMBRIA AVE	W	$61,075.00
ZAK WAY	KELSEY LN	KIMMEL AVE	W	$74,235.00
ZAK WAY	KIMMEL AVE	DIANE WAY	W	$125,735.00
ZAK WAY	REN WAY	WINTER WAY	E	$62,480.00
ZAK WAY	WINTER WAY	REN WAY	W	$64,800.00

ZAPATA ST

Total Cost for Street: **$55,155.00**

Survey Street	Start Street	End Street	Orientation	Cost
ZAPATA ST	E ELLIS ST	LA JOLLA WY	W	$21,435.00
ZAPATA ST	LA JOLLA WY	E ELLIS ST	E	$33,720.00

Total Cost for City Sidewalks: **$299,683,125.13**

SURVEY DATA

SSA Project # 20029
November 2023

SALLY SWANSON
ARCHITECTS, INC.

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100936	10TH ST	S A ST	S B ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49469	2.8 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	193	SF	$120	**$23,100**
49470	43.7 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
49471	72.2 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
49472	73.6 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
49473	91.5 to 95.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
49474	119.5 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
49483	124.9 to 148.1 feet	Key Note Segment		5 ft	116			
49475	150.8 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
49484	155.3 to 181.0 feet	Key Note Segment		5 ft	128			
49476	181.4 to 183.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$480**
49477	186.4 to 192.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
49478	193.8 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49479	199.3 to 224.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
49480	224.4 to 229.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
49481	237.0 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
49482	251.2 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: NW *side of* **10TH ST** *Starting at:* **S A ST** **$86,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100939	10TH ST	S B ST	S C ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49489	8.0 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
49490	37.8 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49485	39.7 to 40.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
49491	42.0 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
49492	46.1 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
49493	50.7 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
49494	54.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
49486	72.5 to 73.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
49495	79.7 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
49496	89.5 to 93.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
49497	95.3 to 104.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
49505	105.2 to 119.3 feet	Key Note Segment		5 ft	71			
49498	120.2 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
49499	124.8 to 126.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49506	126.4 to 144.3 feet	Key Note Segment		5 ft	90			
49487	169.8 to 170.8 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
49500	172.9 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
49501	196.3 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
49502	208.6 to 211.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49503	218.9 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
49504	250.3 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
49488	260.1 to 261.1 feet	**Vertical Change**	.53"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **10TH ST** *Starting at:* **S B ST** **$77,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100953	10TH ST	S B ST	S A ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49585	0.5 to 8.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
49586	10.8 to 13.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
49587	15.0 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
49588	24.7 to 31.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
49580	33.9 to 34.9 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
49589	38.4 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
49590	43.6 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
49581	52.2 to 53.2 feet	**Vertical Change**	.84"	5 ft	5	REF		
49582	63.7 to 64.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
49591	68.8 to 79.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
49583	76.9 to 77.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
49592	86.8 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
49593	99.6 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
49594	108.1 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
49605	110.2 to 144.9 feet	Key Note Segment		5 ft	174			
49595	146.7 to 148.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
49596	149.3 to 158.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
49597	158.6 to 183.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,120**
49598	184.8 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49599	188.6 to 197.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
49600	197.6 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
49606	207.9 to 232.0 feet	Key Note Segment		5 ft	121			
49601	232.0 to 233.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
49602	233.9 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
49603	243.5 to 245.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
49604	247.3 to 270.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**

TOTAL COST FOR: SE *side of* **10TH ST** *Starting at:* **S B ST** **$99,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100944	10TH ST	S C ST	S D ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49533	0.4 to 13.3 feet	Key Note Segment		5 ft	65			
49517	16.3 to 36.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,120**
49518	39.7 to 41.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
49519	44.0 to 52.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
49520	55.3 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
49521	64.0 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
49507	69.0 to 70.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
49522	70.6 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49523	77.3 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49524	81.3 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49525	88.1 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
49508	115.5 to 116.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
49534	126.8 to 142.8 feet	Key Note Segment		5 ft	80			
49509	131.8 to 132.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
49535	147.3 to 162.7 feet	Key Note Segment		5 ft	77			
49526	162.7 to 164.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
49510	162.9 to 163.9 feet	**Vertical Change**	.89"	5 ft	5	REF		
49527	170.4 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49528	189.9 to 194.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
49512	193.0 to 194.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
49529	201.8 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
49513	204.8 to 205.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
49514	220.3 to 221.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
49530	231.8 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49515	248.4 to 249.4 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
49531	253.1 to 258.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49532	268.3 to 274.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
49536	271.9 to 273.4 feet		5.0-6.0%	5 ft	8			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100944	10TH ST	S C ST	S D ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW	*side of* **10TH ST**	*Starting at:* **S C ST**						**$59,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100950	10TH ST	S C ST	S B ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49564	0.4 to 21.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**
49561	19.7 to 20.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
49565	23.3 to 29.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
49566	29.3 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
49567	34.8 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
49568	48.3 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
49577	55.3 to 87.5 feet	Key Note Segment		5 ft	161			
49562	62.6 to 63.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
49563	94.1 to 95.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
49578	95.3 to 108.4 feet	Key Note Segment		5 ft	66			
49579	127.3 to 145.3 feet	Key Note Segment		5 ft	90			
49569	145.3 to 147.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$500**
49570	151.3 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
49571	165.3 to 189.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
49572	189.3 to 194.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
49573	195.7 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
49574	201.3 to 210.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
49575	212.9 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
49576	230.5 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,780**

TOTAL COST FOR: SE *side of* **10TH ST** *Starting at:* **S C ST** **$97,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100947	10TH ST	S D ST	S C ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49540	8.7 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
49541	24.7 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
49557	56.3 to 64.6 feet	Key Note Segment		5 ft	41			
49542	64.6 to 69.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$940**
49543	82.1 to 83.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49558	83.3 to 93.1 feet	Key Note Segment		5 ft	49			
49544	93.3 to 113.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	99	SF	$40	**$3,960**
49537	93.5 to 94.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
49545	113.6 to 126.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
49559	126.6 to 142.2 feet	Key Note Segment		5 ft	78			
49546	144.5 to 156.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
49538	154.8 to 155.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
49547	157.9 to 168.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
49548	172.1 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
49560	177.9 to 193.4 feet	Key Note Segment		5 ft	78			
49549	198.7 to 205.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
49550	209.5 to 211.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
49551	215.7 to 228.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
49552	229.0 to 241.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
49553	244.8 to 250.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
49554	251.3 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
49555	262.0 to 266.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
49556	267.8 to 270.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: SE *side of* **10TH ST** *Starting at:* **S D ST** **$88,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081455	11TH ST	631 S GATEWAY DR	S GATEWAY DR	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46180	0.0 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
46181	23.8 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
46182	29.3 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
46183	32.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
46185	38.8 to 116.3 feet	Key Note Segment		5 ft	388			
46184	116.3 to 121.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,080**

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **631 S GATEWAY DR** **$18,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081354	11TH ST	700 S G ST	S G ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45875	0.9 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45876	12.4 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
45877	26.5 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45880	28.3 to 42.6 feet	Key Note Segment		5 ft	72			
45878	59.3 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
45879	62.6 to 65.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **700 S G ST** **$10,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081406	11TH ST	700 S GATEWAY DR	S GATEWAY DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45908	0.4 to 1.4 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
45921	2.8 to 26.8 feet	Key Note Segment		5 ft	120			
45910	29.0 to 30.0 feet	Vertical Change	.29"	5 ft	5	REF		
45913	29.6 to 36.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
45911	37.9 to 38.9 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
45914	40.8 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
45912	45.6 to 46.6 feet	Vertical Change	.29"	5 ft	5	REF		
45922	47.5 to 69.6 feet	Key Note Segment		5 ft	110			
45915	69.6 to 73.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	$760
45916	73.4 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
45917	80.4 to 89.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
45923	89.3 to 105.8 feet	Key Note Segment		5 ft	83			
45918	105.8 to 111.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	$1,100
45919	113.5 to 114.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
45920	116.2 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **700 S GATEWAY DR** **$25,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101001	11TH ST	S A ST	S B ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49650	1.1 to 2.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
49657	2.4 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
49651	5.1 to 6.1 feet	Vertical Change	-.28"	5 ft	5	REF		
49658	13.3 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
49659	20.4 to 22.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
49660	23.9 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
49652	26.6 to 27.6 feet	Vertical Change	-.28"	5 ft	5	REF		
49661	30.5 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	$21,660
49653	48.1 to 49.1 feet	Vertical Change	.3"	5 ft	5	REF		
49654	56.8 to 57.8 feet	Vertical Change	.26"	5 ft	5	REF		
49662	69.3 to 73.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,280
49663	73.1 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	$15,120
49664	102.8 to 121.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	$11,220
49674	122.0 to 141.4 feet	Key Note Segment		5 ft	97			
49665	141.4 to 154.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	64	SF	$40	$2,560
49666	166.0 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
49667	179.1 to 185.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
49668	186.1 to 187.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
49655	186.3 to 187.3 feet	Vertical Change	.27"	5 ft	5	REF		
49669	191.8 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
49675	199.6 to 224.5 feet	Key Note Segment		5 ft	125			
49670	226.3 to 232.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	$3,900
49671	232.8 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,360
49672	258.0 to 261.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
49673	261.3 to 267.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S A ST** **$101,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100923	11TH ST	S A ST	S LAKE ST	112

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49386	0.2 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
49367	7.7 to 8.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
49387	9.6 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
49368	13.8 to 14.8 feet	**Vertical Change**	1.06"	5 ft	5	REF		
49388	14.3 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49369	21.1 to 22.1 feet	**Vertical Change**	2.5"	5 ft	5	REF		
49389	21.6 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49390	27.8 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
49370	30.5 to 31.5 feet	**Vertical Change**	.61"	5 ft	5	REF		
49391	38.3 to 40.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
49392	42.8 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49393	46.6 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
49371	47.4 to 48.4 feet	**Vertical Change**	1.59"	5 ft	5	REF		
49372	60.0 to 61.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
49394	65.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
49373	74.7 to 75.7 feet	**Vertical Change**	1.31"	5 ft	5	REF		
49374	79.5 to 80.5 feet	**Vertical Change**	1.19"	5 ft	5	REF		
49395	89.8 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
49411	92.7 to 104.8 feet	Key Note Segment		5 ft	61			
49375	93.4 to 94.4 feet	**Vertical Change**	.74"	5 ft	5	REF		
49376	104.6 to 105.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
49396	104.8 to 116.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
49377	106.7 to 107.7 feet	**Vertical Change**	3.03"	5 ft	5	SF	$75	**$375**
49378	108.4 to 109.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
49379	110.7 to 111.7 feet	**Vertical Change**	.69"	5 ft	5	REF		
49380	112.4 to 113.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
49381	118.7 to 119.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
49397	118.8 to 120.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100923	11TH ST	S A ST	S LAKE ST	112

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49398	121.4 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
49412	126.8 to 144.4 feet	Key Note Segment		5 ft	88			
49382	127.1 to 128.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
49383	144.3 to 145.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
49399	144.6 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
49400	151.9 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
49384	162.0 to 163.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
49401	166.4 to 168.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
49402	171.7 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
49403	180.3 to 184.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
49404	185.6 to 188.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49413	188.1 to 198.2 feet	Key Note Segment		5 ft	51			
49405	198.5 to 201.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
49406	201.9 to 229.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**
49407	229.9 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
49408	243.8 to 244.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
49409	244.9 to 256.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
49410	258.6 to 267.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
49385	261.3 to 262.3 feet	**Vertical Change**	3.55"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S A ST** **$98,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101004	11TH ST	S B ST	S C ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49680	0.3 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49681	8.7 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49682	14.6 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
49683	20.4 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
49684	43.9 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
49694	102.8 to 113.3 feet	Key Note Segment		5 ft	53			
49685	119.4 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
49695	126.3 to 143.8 feet	Key Note Segment		5 ft	88			
49676	127.2 to 128.2 feet	**Vertical Change**	.73"	5 ft	5	REF		
49686	143.8 to 155.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
49687	158.3 to 162.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
49688	166.1 to 177.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
49696	177.1 to 193.2 feet	Key Note Segment		5 ft	81			
49677	177.2 to 178.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
49689	193.2 to 194.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
49690	194.8 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
49691	205.8 to 208.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
49692	208.0 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
49678	220.8 to 221.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
49679	234.3 to 235.3 feet	**Vertical Change**	2.26"	5 ft	5	SF	$75	**$375**
49693	237.2 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,240**

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S B ST** **$65,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101018	11TH ST	S B ST	S A ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49754	0.1 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
49755	25.9 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
49756	29.5 to 30.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
49757	33.0 to 38.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
49758	38.9 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
49771	49.1 to 75.9 feet	Key Note Segment		5 ft	134			
49759	77.6 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
49760	102.9 to 110.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
49761	115.4 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
49762	119.1 to 123.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
49772	123.9 to 145.6 feet	Key Note Segment		5 ft	109			
49763	146.0 to 155.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	45	SF	$40	**$1,800**
49753	153.5 to 154.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
49773	155.0 to 182.6 feet	Key Note Segment		5 ft	138			
49764	186.6 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
49765	193.8 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
49766	204.1 to 215.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
49767	218.5 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
49768	225.5 to 240.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
49769	241.1 to 248.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
49770	251.1 to 266.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,180**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S B ST** **$91,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101009	11TH ST	S C ST	S D ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49699	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
49700	3.0 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
49701	19.6 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
49709	30.1 to 55.8 feet	Key Note Segment		5 ft	129			
49702	55.9 to 87.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	158	SF	$40	**$6,320**
49703	120.7 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
49710	126.8 to 143.9 feet	Key Note Segment		5 ft	86			
49704	145.5 to 166.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,300**
49697	163.4 to 164.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
49705	166.0 to 176.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
49706	179.3 to 206.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	136	SF	$120	**$16,320**
49698	194.7 to 195.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
49711	206.7 to 217.0 feet	Key Note Segment		5 ft	52			
49707	217.0 to 218.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
49708	222.8 to 272.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	246	SF	$120	**$29,520**

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S C ST** **$90,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101015	11TH ST	S C ST	S B ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49731	7.6 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
49732	21.8 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
49730	23.0 to 24.0 feet	**Vertical Change**	1.19"	5 ft	5	REF		
49733	52.0 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
49734	61.5 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
49735	90.5 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
49736	108.3 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
49737	116.5 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49738	123.0 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
49751	126.3 to 143.1 feet	Key Note Segment		5 ft	84			
49739	143.9 to 147.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
49740	148.8 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
49741	159.7 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49742	165.9 to 172.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
49743	172.3 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49744	177.3 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49752	183.3 to 199.8 feet	Key Note Segment		5 ft	83			
49745	199.8 to 203.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
49746	210.3 to 216.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
49747	220.2 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
49748	234.7 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
49749	252.3 to 266.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
49750	269.1 to 273.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S C ST** **$78,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101012	11TH ST	S D ST	S C ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49716	0.1 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
49717	24.8 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
49718	32.6 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
49712	34.4 to 35.4 feet	**Vertical Change**	.84"	5 ft	5	REF		
49719	66.6 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
49713	80.0 to 81.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
49720	95.2 to 102.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
49714	99.2 to 100.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
49721	102.5 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
49722	114.6 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
49723	119.5 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
49728	123.1 to 140.4 feet	Key Note Segment		5 ft	87			
49724	141.3 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
49729	156.1 to 166.7 feet	Key Note Segment		5 ft	53			
49725	169.6 to 177.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
49726	187.3 to 193.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
49727	254.4 to 257.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S D ST** **$56,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081351	11TH ST	S G ST	211 MADERA AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45866	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	38	SF	$120	**$4,560**
45867	3.8 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	30	SF	$120	**$3,600**
45868	12.3 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	21	SF	$120	**$2,520**
45869	18.3 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	326	SF	$120	**$39,120**
45874	56.1 to 82.3 feet	Key Note Segment		10 ft	262			
45865	76.8 to 77.8 feet	**Vertical Change**	.36"	10 ft	10	REF		
45870	85.7 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	13	SF	$120	**$1,560**
45871	90.1 to 99.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	90	SF	$120	**$10,800**
45872	99.1 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	174	SF	$120	**$20,880**
45873	122.3 to 124.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S G ST** **$85,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081400	11TH ST	S G ST	701 S G ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45898	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
45894	27.5 to 28.5 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
45899	29.6 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
45900	41.3 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45901	45.2 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45902	58.1 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
45895	66.5 to 67.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
45903	70.2 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
45904	89.8 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
45896	99.2 to 100.2 feet	**Vertical Change**	1.54"	5 ft	5	SF	$75	**$375**
45905	102.5 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
45906	104.6 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
45897	110.3 to 111.3 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
45907	113.8 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S G ST** **$21,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081343	11TH ST	S GATEWAY DR	S G ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45834	1.3 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
45825	12.4 to 13.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
45835	19.2 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
45826	30.9 to 31.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
45845	38.1 to 69.9 feet	Key Note Segment		5 ft	159			
45827	53.4 to 54.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
45829	69.1 to 70.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
45836	71.4 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
45837	77.7 to 79.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
45838	81.9 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,140**
45839	88.8 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45831	96.1 to 97.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
45840	99.2 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
45832	103.8 to 104.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
45841	107.6 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
45846	124.8 to 143.3 feet	Key Note Segment		5 ft	93			
45833	142.0 to 143.0 feet	**Vertical Change**	1.05"	5 ft	5	REF		
45842	143.3 to 145.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$380**
45847	146.0 to 153.6 feet	Key Note Segment		5 ft	38			
45848	164.0 to 178.4 feet	Key Note Segment		5 ft	72			
45843	186.9 to 188.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
45844	265.7 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S GATEWAY DR** **$50,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081452	11TH ST	S GATEWAY DR	701 S GATEWAY DR	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46175	0.1 to 2.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	12	SF	$120	**$1,440**
46171	0.8 to 1.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
46176	3.3 to 4.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$780**
46177	4.6 to 7.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
46179	8.7 to 123.2 feet	Key Note Segment		5 ft	573			
46172	13.2 to 14.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
46174	108.5 to 109.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
46178	123.2 to 125.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**

TOTAL COST FOR: SE *side of* **11TH ST** *Starting at:* **S GATEWAY DR** **$4,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100927	11TH ST	S LAKE ST	S A ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49419	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
49420	3.4 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,340**
49414	4.9 to 5.9 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
49421	37.3 to 47.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
49422	47.9 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
49423	60.2 to 90.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	151	SF	$120	**$18,060**
49424	90.8 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
49425	97.4 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
49426	109.3 to 120.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
49436	120.6 to 141.6 feet	Key Note Segment		5 ft	105			
49415	140.4 to 141.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
49427	142.4 to 164.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	110	SF	$40	**$4,400**
49416	143.7 to 144.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
49428	167.3 to 178.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
49417	168.0 to 169.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
49429	181.3 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
49430	191.3 to 220.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,400**
49431	221.2 to 228.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
49432	231.1 to 232.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49433	233.8 to 236.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
49434	236.3 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
49435	253.7 to 267.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
49418	266.9 to 267.9 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **11TH ST** *Starting at:* **S LAKE ST** **$122,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091154	12TH ST	112 12TH ST	S D ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47697	0.3 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
47698	5.8 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
47699	12.0 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
47704	31.5 to 71.3 feet	Key Note Segment		5 ft	199			
47700	72.0 to 90.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
47701	90.0 to 115.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	129	SF	$120	**$15,420**
47702	117.5 to 121.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
47703	121.6 to 125.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: SE *side of* **12TH ST** *Starting at:* **112 12TH ST** **$44,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081413	12TH ST	723 S G ST	S G ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45954	0.0 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
45955	9.3 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
45956	41.4 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
45957	56.3 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45963	61.5 to 85.1 feet	Key Note Segment		5 ft	118			
45958	90.6 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
45959	93.3 to 94.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
45960	100.4 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45961	136.0 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45962	140.4 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: SE *side of* **12TH ST** *Starting at:* **723 S G ST** **$22,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101026	12TH ST	S A ST	S B ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49813	1.3 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
49814	25.0 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
49815	32.0 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
49808	57.2 to 58.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
49816	59.8 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
49817	66.9 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
49818	77.0 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
49829	84.2 to 93.7 feet	Key Note Segment		5 ft	48			
49809	85.9 to 86.9 feet	**Vertical Change**	1.56"	5 ft	5	REF		
49810	101.4 to 102.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
49811	104.9 to 105.9 feet	**Vertical Change**	2.07"	5 ft	5	SF	$75	**$375**
49819	115.4 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
49832	122.1 to 123.8 feet		5.0-6.0%	5 ft	9			
49830	123.8 to 142.4 feet	Key Note Segment		5 ft	93			
49820	142.4 to 155.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	68	SF	$40	**$2,700**
49821	158.3 to 165.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,140**
49822	166.0 to 167.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49812	182.1 to 183.1 feet	**Vertical Change**	-2.47"	5 ft	5	SF	$75	**$375**
49831	182.6 to 199.5 feet	Key Note Segment		5 ft	85			
49823	200.5 to 206.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
49824	209.1 to 211.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
49825	211.9 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
49826	222.9 to 224.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
49827	224.0 to 249.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
49828	252.4 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**

TOTAL COST FOR: NW *side of* **12TH ST** *Starting at:* **S A ST** **$78,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100907	12TH ST	S A ST	ROOSEVELT AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49270	0.0 to 50.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	254	SF	$120	**$30,480**
49258	10.8 to 11.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
49271	51.2 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49272	61.9 to 78.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
49273	80.8 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
49259	96.9 to 97.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
49260	105.6 to 106.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
49274	105.9 to 108.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
49275	110.5 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
49276	118.4 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
49277	123.5 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
49261	129.8 to 130.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
49278	131.3 to 143.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,500**
49262	144.5 to 145.5 feet	**Vertical Change**	-1.18"	5 ft	5	REF		
49279	144.5 to 146.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
49280	146.3 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
49263	152.5 to 153.5 feet	**Vertical Change**	1.27"	5 ft	5	REF		
49281	161.0 to 168.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
49282	171.7 to 184.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
49264	174.7 to 175.7 feet	**Vertical Change**	.7"	5 ft	5	REF		
49283	187.3 to 201.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
49284	202.8 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
49265	209.2 to 210.2 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
49285	214.3 to 215.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49286	218.6 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
49287	231.7 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
49288	236.9 to 255.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
49266	254.6 to 255.6 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106100907	12TH ST	S A ST	ROOSEVELT AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49289	255.8 to 274.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
49267	271.8 to 272.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
49290	276.8 to 279.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
49291	282.0 to 302.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,360**
49268	297.6 to 298.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
49292	305.1 to 312.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
49269	305.8 to 306.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
49293	312.2 to 315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: SE *side of* **12TH ST** *Starting at:* **S A ST** **$160,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106101043	12TH ST	S B ST	S A ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49929	13.4 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
49930	27.9 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
49931	46.1 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
49932	53.8 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
49933	61.5 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
49934	76.3 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	249	SF	$120	**$29,820**
49937	126.0 to 144.0 feet	Key Note Segment		5 ft	90			
49935	147.8 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49938	195.9 to 210.8 feet	Key Note Segment		5 ft	75			
49928	236.8 to 237.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
49936	272.0 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: NE *side of* **12TH ST** *Starting at:* **S B ST** **$51,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101029	12TH ST	S B ST	S C ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49835	0.9 to 11.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
49836	12.1 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
49837	25.1 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
49838	28.7 to 41.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
49839	41.6 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
49840	47.3 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
49855	50.0 to 57.8 feet	Key Note Segment		5 ft	39			
49841	57.8 to 62.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	21	SF	$40	**$840**
49842	62.0 to 66.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
49843	70.1 to 87.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
49856	88.3 to 97.6 feet	Key Note Segment		5 ft	47			
49833	88.6 to 89.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
49844	98.3 to 106.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,700**
49845	108.5 to 127.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
49857	127.7 to 142.2 feet	Key Note Segment		5 ft	72			
49846	151.8 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
49847	155.7 to 157.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
49848	157.7 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49858	159.7 to 169.1 feet	Key Note Segment		5 ft	47			
49834	160.6 to 161.6 feet	**Vertical Change**	.94"	5 ft	5	REF		
49849	169.1 to 172.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$580**
49850	202.1 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49859	210.0 to 219.7 feet	Key Note Segment		5 ft	49			
49851	222.4 to 246.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
49852	249.3 to 259.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
49853	259.6 to 263.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
49854	263.8 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: NW *side of* **12TH ST** *Starting at:* **S B ST** **$85,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101033	12TH ST	S C ST	S D ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49863	17.6 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
49864	28.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
49865	44.3 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
49866	46.8 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
49889	60.2 to 70.4 feet	Key Note Segment		5 ft	51			
49867	70.4 to 78.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
49868	80.9 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,340**
49860	83.5 to 84.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
49861	98.5 to 99.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
49869	101.1 to 107.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	30	SF	$120	**$3,600**
49870	109.2 to 125.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	81	SF	$120	**$9,660**
49871	125.3 to 126.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
49890	128.8 to 146.5 feet	Key Note Segment		5 ft	88			
49872	146.5 to 150.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$740**
49862	148.6 to 149.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
49873	150.2 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49874	155.9 to 163.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
49875	167.5 to 179.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
49876	180.3 to 187.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
49877	187.6 to 188.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
49878	189.9 to 194.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
49891	194.8 to 204.0 feet	Key Note Segment		5 ft	46			
49879	205.0 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
49880	218.6 to 221.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49881	225.3 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
49882	233.3 to 236.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49883	239.8 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
49884	246.8 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101033	12TH ST	S C ST	S D ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49885	260.3 to 262.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
49886	265.1 to 267.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
49887	269.6 to 273.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
49888	273.9 to 275.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: NW *side of* **12TH ST** *Starting at:* **S C ST** **$90,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101040	12TH ST	S C ST	S B ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49907	0.6 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
49908	2.2 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,760**
49909	37.3 to 40.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
49910	41.4 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
49911	45.8 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
49912	49.0 to 50.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
49913	51.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
49914	62.9 to 98.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	177	SF	$120	**$21,180**
49915	99.7 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
49906	100.3 to 101.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
49916	118.3 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
49926	125.3 to 153.7 feet	Key Note Segment		5 ft	142			
49917	153.7 to 156.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$640**
49918	159.4 to 164.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
49919	168.4 to 174.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
49920	174.6 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
49921	185.8 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
49922	207.0 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
49923	211.2 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49924	221.6 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
49927	228.9 to 239.0 feet	Key Note Segment		5 ft	51			
49925	244.9 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**

TOTAL COST FOR: SE *side of* **12TH ST** *Starting at:* **S C ST** **$107,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091151	12TH ST	S D ST	724 12TH ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47688	1.8 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
47689	12.1 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
47690	36.1 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
47696	53.7 to 83.8 feet	Key Note Segment		5 ft	151			
47691	83.8 to 86.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
47692	86.9 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47693	94.2 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
47687	94.6 to 95.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
47694	100.2 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
47695	123.0 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: NW *side of* **12TH ST** *Starting at:* **S D ST** **$30,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101037	12TH ST	S D ST	S C ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49892	2.5 to 3.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
49894	3.8 to 10.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,720
49895	10.4 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,240
49893	11.8 to 12.8 feet	Vertical Change	.28"	5 ft	5	REF		
49896	30.5 to 39.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	$5,520
49897	39.9 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,220
49904	59.5 to 69.3 feet	Key Note Segment		5 ft	49			
49898	69.3 to 74.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	28	SF	$40	$1,100
49899	75.9 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
49900	82.8 to 84.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
49901	86.4 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
49905	126.4 to 143.1 feet	Key Note Segment		5 ft	84			
49902	164.4 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
49903	189.3 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500

TOTAL COST FOR: SE *side of* **12TH ST** *Starting at:* **S D ST** **$44,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100912	12TH ST	S LAKE ST	S A ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49300	12.3 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
49301	26.5 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49294	29.6 to 30.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
49302	33.8 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
49295	42.6 to 43.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
49303	57.2 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49296	67.9 to 68.9 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
49316	80.4 to 88.8 feet	Key Note Segment		5 ft	42			
49304	92.1 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
49305	125.1 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49317	126.7 to 143.9 feet	Key Note Segment		5 ft	86			
49306	145.2 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
49318	163.1 to 173.5 feet	Key Note Segment		5 ft	52			
49307	174.9 to 184.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
49297	193.4 to 194.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
49308	198.2 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49298	198.5 to 199.5 feet	**Vertical Change**	-1.2"	5 ft	5	REF		
49309	201.9 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
49310	221.1 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49311	227.8 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
49312	240.0 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
49313	248.9 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
49314	259.7 to 261.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
49299	260.5 to 261.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
49315	269.2 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: NW *side of* **12TH ST** *Starting at:* **S LAKE ST** **$53,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101053	13TH ST	S A ST	S B ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49985	11.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
49978	16.5 to 17.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
49986	28.3 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
49987	97.0 to 98.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49979	109.7 to 110.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
49988	110.7 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
49997	124.3 to 139.8 feet	Key Note Segment		5 ft	78			
49989	140.2 to 141.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
49980	140.5 to 141.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
49990	141.2 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49981	178.1 to 179.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
49991	183.0 to 187.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
49982	185.7 to 188.9 feet	**Vertical Change**	.52"	5 ft	16	REF		
49992	189.4 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
49983	193.1 to 194.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
49993	199.3 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
49994	208.4 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49995	216.3 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
49984	223.0 to 224.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
49996	223.7 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: NW *side of* **13TH ST** *Starting at:* **S A ST** **$51,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101056	13TH ST	S B ST	S C ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50001	0.4 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
50002	22.6 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
50003	32.2 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
49998	33.6 to 34.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
50000	59.5 to 60.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
50004	87.9 to 90.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
50016	109.2 to 119.0 feet	Key Note Segment		5 ft	49			
50005	120.2 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
50017	128.3 to 142.5 feet	Key Note Segment		5 ft	71			
50018	145.7 to 155.9 feet	Key Note Segment		5 ft	51			
50006	158.7 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
50007	162.3 to 168.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
50008	168.3 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
50009	172.2 to 174.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
50010	176.4 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
50011	201.3 to 220.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
50012	222.7 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
50013	226.7 to 229.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
50014	231.8 to 257.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
50015	260.3 to 271.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**

TOTAL COST FOR: NW *side of* **13TH ST** *Starting at:* **S B ST** **$73,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101108	13TH ST	S B ST	S A ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50112	1.6 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
50113	14.6 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	219	SF	$120	**$26,280**
50107	56.6 to 57.6 feet	**Vertical Change**	1.21"	5 ft	5	REF		
50114	61.3 to 65.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
50115	67.9 to 77.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**
50116	78.2 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
50117	90.3 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
50118	94.5 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50119	105.7 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50120	110.6 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
50126	124.3 to 141.4 feet	Key Note Segment		5 ft	86			
50108	125.0 to 126.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
50121	141.4 to 153.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	62	SF	$40	**$2,480**
50122	156.1 to 158.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
50123	161.3 to 204.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,680**
50109	191.8 to 192.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
50127	204.1 to 221.2 feet	Key Note Segment		5 ft	86			
50124	221.2 to 228.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	35	SF	$40	**$1,380**
50110	221.8 to 222.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
50125	230.3 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	193	SF	$120	**$23,100**
50111	232.8 to 233.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **13TH ST** *Starting at:* **S B ST** **$108,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101058	13TH ST	S C ST	S D ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50027	0.7 to 4.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
50019	4.2 to 5.2 feet	**Vertical Change**	3.32"	5 ft	5	SF	$75	**$375**
50028	8.5 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
50029	13.2 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
50030	17.3 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
50031	31.7 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
50048	43.4 to 52.3 feet	Key Note Segment		5 ft	45			
50032	52.3 to 74.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	109	SF	$40	**$4,340**
50020	60.2 to 61.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
50021	64.1 to 65.1 feet	**Vertical Change**	.95"	5 ft	5	REF		
50022	68.0 to 69.0 feet	**Vertical Change**	3.43"	5 ft	5	REF		
50033	76.3 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
50023	79.7 to 80.7 feet	**Vertical Change**	3.52"	5 ft	5	REF		
50034	99.9 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
50035	113.9 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50036	118.8 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
50049	125.9 to 143.4 feet	Key Note Segment		5 ft	88			
50024	128.3 to 129.3 feet	**Vertical Change**	2.62"	5 ft	5	REF		
50037	147.0 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
50038	155.4 to 158.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
50039	163.8 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
50040	177.7 to 179.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
50041	179.8 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
50050	208.3 to 217.1 feet	Key Note Segment		5 ft	44			
50042	217.8 to 218.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
50025	219.4 to 220.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
50043	222.5 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50044	227.3 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101058	13TH ST	S C ST	S D ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50045	244.8 to 248.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
50026	245.4 to 246.4 feet	**Vertical Change**	.58"	5 ft	5	REF		
50046	262.4 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50047	267.9 to 269.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: NW *side of* **13TH ST** *Starting at:* **S C ST** **$74,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101105	13TH ST	S C ST	S B ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50091	9.8 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
50083	18.2 to 19.2 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
50084	48.3 to 49.3 feet	Vertical Change	-1.52"	5 ft	5	SF	$75	$375
50092	50.3 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
50104	52.7 to 68.8 feet	Key Note Segment		5 ft	81			
50085	53.2 to 54.2 feet	Vertical Change	.39"	5 ft	5	REF		
50086	68.7 to 69.7 feet	Vertical Change	.27"	5 ft	5	REF		
50093	68.8 to 73.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	$940
50094	73.7 to 80.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840
50095	81.0 to 85.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
50087	87.1 to 88.1 feet	Vertical Change	.31"	5 ft	5	REF		
50096	88.0 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
50097	92.6 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340
50098	104.3 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060
50099	121.8 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
50105	128.0 to 145.8 feet	Key Note Segment		5 ft	89			
50100	147.1 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,460
50101	160.1 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,600
50102	181.9 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
50103	188.5 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
50089	192.7 to 193.7 feet	Vertical Change	.62"	5 ft	5	SF	$75	$375
50106	192.8 to 212.4 feet	Key Note Segment		5 ft	98			
50090	213.2 to 214.2 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375

TOTAL COST FOR: SE *side of* **13TH ST** *Starting at:* **S C ST** **$50,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101102	13TH ST	S D ST	S C ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50062	3.0 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
50051	26.6 to 27.6 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
50063	28.5 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
50052	30.5 to 31.5 feet	**Vertical Change**	3.48"	5 ft	5	REF		
50053	32.2 to 33.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
50054	39.1 to 40.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50064	42.0 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50065	45.8 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
50055	94.5 to 95.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
50066	104.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
50067	115.4 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
50080	126.7 to 144.5 feet	Key Note Segment		5 ft	89			
50056	131.5 to 132.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50057	133.6 to 134.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
50058	137.1 to 138.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
50068	147.0 to 173.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,780**
50082	173.6 to 174.6 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
50081	173.8 to 183.6 feet	Key Note Segment		5 ft	49			
50069	184.0 to 186.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$540**
50070	187.6 to 194.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
50071	196.3 to 202.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
50072	202.1 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
50059	203.0 to 204.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
50073	206.1 to 209.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
50074	209.6 to 213.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
50075	215.9 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
50076	233.3 to 234.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
50077	240.8 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106101102	13TH ST	S D ST	S C ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50060	247.4 to 248.4 feet	Vertical Change	3.16"	5 ft	5	REF		
50078	253.0 to 255.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
50079	262.1 to 266.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
50061	271.8 to 272.8 feet	Vertical Change	3.58"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: SE *side of* **13TH ST** *Starting at:* **S D ST** **$75,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091459	14TH ST	DON MIGUEL ST	S C ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48467	0.0 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	242	SF	$120	**$29,040**
48466	34.5 to 35.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48468	51.5 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
48469	55.9 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
48470	70.3 to 91.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**

TOTAL COST FOR: SE *side of* **14TH ST** *Starting at:* **DON MIGUEL ST** **$49,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091657	14TH ST	S B ST	S C ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49207	16.3 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
49208	20.1 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
49209	28.2 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
49202	46.8 to 47.8 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
49210	54.3 to 57.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
49211	69.2 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
49212	80.4 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
49203	84.2 to 85.2 feet	**Vertical Change**	.36"	4 ft	4	REF		
49213	85.0 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
49214	94.3 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
49215	105.8 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
49216	110.2 to 111.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
49217	112.8 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
49228	128.7 to 145.5 feet	Key Note Segment		4 ft	67			
49218	147.9 to 151.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
49229	151.9 to 161.8 feet	Key Note Segment		4 ft	40			
49219	161.8 to 171.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	37	SF	$40	**$1,472**
49204	176.1 to 177.1 feet	**Vertical Change**	1.03"	4 ft	4	REF		
49220	176.2 to 177.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
49221	180.0 to 184.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,352**
49205	180.2 to 183.2 feet	**Vertical Change**	.31"	4 ft	12	REF		
49222	185.6 to 202.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	68	SF	$120	**$8,160**
49223	206.3 to 207.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
49224	217.3 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
49225	224.6 to 236.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
49206	233.0 to 234.0 feet	**Vertical Change**	2.37"	4 ft	4	REF		
49226	240.3 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
49227	255.2 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091657	14TH ST	S B ST	S C ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW *side of* **14TH ST** *Starting at:* **S B ST**								**$46,844.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091449	14TH ST	S C ST	S D ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48391	0.7 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
48384	1.5 to 2.5 feet	**Vertical Change**	1.85"	5 ft	5	REF		
48392	17.3 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
48393	22.9 to 23.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
48394	27.3 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
48395	31.9 to 34.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
48396	34.1 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
48414	43.8 to 52.2 feet	Key Note Segment		5 ft	42			
48397	52.9 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
48385	58.6 to 59.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
48398	59.0 to 61.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
48415	62.8 to 70.7 feet	Key Note Segment		5 ft	40			
48399	70.9 to 87.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	84	SF	$40	**$3,380**
48400	90.0 to 97.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
48401	98.3 to 99.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
48402	100.1 to 114.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	74	SF	$120	**$8,820**
48386	101.7 to 102.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
48387	105.0 to 106.0 feet	**Vertical Change**	1.38"	5 ft	5	REF		
48403	114.8 to 122.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
48404	125.6 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
48416	127.4 to 142.9 feet	Key Note Segment		5 ft	78			
48405	143.1 to 145.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	10	SF	$40	**$420**
48388	143.7 to 144.7 feet	**Vertical Change**	-.45"	5 ft	5	REF		
48417	145.2 to 154.3 feet	Key Note Segment		5 ft	46			
48406	154.4 to 164.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	51	SF	$40	**$2,040**
48407	165.3 to 189.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
48408	194.6 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
48409	201.1 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091449	14TH ST	S C ST	S D ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48389	211.6 to 212.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
48410	227.1 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
48411	245.1 to 251.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
48412	255.2 to 269.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
48413	269.6 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
48390	273.2 to 274.2 feet	Vertical Change	-.33"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **14TH ST** *Starting at:* **S C ST** **$88,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091520	14TH ST	S C ST	ROOSEVELT AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48540	0.1 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,860**
48541	32.0 to 47.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
48542	49.7 to 67.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
48534	50.0 to 51.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
48535	66.4 to 67.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
48543	68.7 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
48544	105.0 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
48545	120.4 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
48554	124.0 to 141.8 feet	Key Note Segment		5 ft	89			
48536	124.8 to 125.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
48546	141.8 to 170.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	143	SF	$40	**$5,720**
48537	164.4 to 165.4 feet	**Vertical Change**	.65"	5 ft	5	REF		
48547	170.4 to 175.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
48538	180.0 to 181.0 feet	**Vertical Change**	1.29"	5 ft	5	SF	$75	**$375**
48555	183.7 to 196.5 feet	Key Note Segment		5 ft	64			
48548	196.5 to 205.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	45	SF	$40	**$1,800**
48539	204.8 to 207.8 feet	**Vertical Change**	.31"	5 ft	15	REF		
48556	206.5 to 220.1 feet	Key Note Segment		5 ft	68			
48549	232.8 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
48550	241.3 to 245.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
48551	262.7 to 271.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
48552	284.5 to 291.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
48553	292.6 to 296.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: SE *side of* **14TH ST** *Starting at:* **S C ST** **$76,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091451	14TH ST	S D ST	DON MIGUEL ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48419	0.0 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,980**
48420	68.8 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
48421	99.8 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
48422	105.2 to 109.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
48418	108.8 to 109.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
48423	110.0 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: NE *side of* **14TH ST** *Starting at:* **S D ST** **$48,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106080919	1ST ST	N D ST	N E ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44796	0.8 to 30.3 feet	Key Note Segment		5 ft	148			
44778	31.2 to 34.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
44779	38.8 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
44780	49.4 to 53.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
44781	58.3 to 59.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
44763	59.0 to 60.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
44797	60.2 to 87.4 feet	Key Note Segment		5 ft	136			
44782	87.8 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
44783	91.3 to 101.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
44784	101.4 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
44785	125.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
44798	128.3 to 146.3 feet	Key Note Segment		5 ft	90			
44764	143.2 to 144.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
44765	145.1 to 146.1 feet	**Vertical Change**	-.48"	5 ft	5	REF		
44766	147.0 to 148.0 feet	**Vertical Change**	-.94"	5 ft	5	SF	$75	**$375**
44786	151.2 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44800	155.2 to 156.3 feet		5.0-6.0%	5 ft	6			
44767	155.9 to 156.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
44787	163.3 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
44768	163.6 to 164.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
44769	178.0 to 179.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
44788	181.5 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
44789	204.5 to 213.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
44799	213.6 to 223.3 feet	Key Note Segment		5 ft	49			
44770	222.7 to 223.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44771	224.5 to 225.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
44772	227.7 to 232.2 feet	**Vertical Change**	.36"	5 ft	23	LF	$75	**$1,688**
44790	232.8 to 233.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106080919	1ST ST	N D ST	N E ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44773	232.9 to 233.9 feet	Vertical Change	-.41"	5 ft	5	REF		
44791	234.3 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
44774	234.6 to 239.0 feet	Vertical Change	.31"	5 ft	22	REF		
44792	242.6 to 246.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
44776	243.2 to 249.0 feet	Vertical Change	.31"	5 ft	29	REF		
44793	253.4 to 254.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
44794	257.4 to 259.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
44795	264.8 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44777	271.6 to 272.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
44801	272.4 to 275.3 feet		5.0-6.0%	5 ft	15			
44802	272.4 to 275.3 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: NW *side of* **1ST ST** *Starting at:* **N D ST** **$61,642.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106080930	2ND ST	424 N D ST	N D ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44838	1.3 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
44839	9.4 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44854	12.7 to 33.4 feet	Key Note Segment		5 ft	104			
44833	16.2 to 17.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
44834	18.8 to 19.8 feet	**Vertical Change**	.6"	5 ft	5	REF		
44835	33.1 to 34.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
44840	49.5 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
44841	63.4 to 67.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
44842	67.5 to 74.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
44843	75.3 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
44844	79.9 to 80.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44845	84.2 to 85.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
44846	86.8 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
44847	90.7 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
44836	91.3 to 92.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
44848	94.8 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
44849	99.5 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44850	103.4 to 104.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
44851	109.6 to 111.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
44852	116.3 to 117.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
44837	120.3 to 121.3 feet	**Vertical Change**	.59"	5 ft	5	REF		
44853	120.3 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: SE *side of* **2ND ST** *Starting at:* **424 N D ST** **$28,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081136	2ND ST	501 N E ST	N E ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45562	12.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45563	15.8 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
45564	21.2 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
45565	27.1 to 80.3 feet	Key Note Segment		5 ft	266			
45561	119.0 to 120.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **2ND ST** *Starting at:* **501 N E ST** **$6,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081047	2ND ST	N C ST	N D ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45272	6.9 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45264	8.4 to 9.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
45273	12.6 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
45274	20.7 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
45275	25.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
45276	32.8 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45277	47.2 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45278	59.3 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
45279	72.3 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
45280	77.5 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
45265	97.5 to 98.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
45281	101.1 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
45292	105.8 to 114.8 feet	Key Note Segment		5 ft	45			
45282	114.8 to 122.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	41	SF	$40	**$1,620**
45283	125.1 to 129.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
45293	129.0 to 145.8 feet	Key Note Segment		5 ft	84			
45266	145.2 to 146.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
45294	148.7 to 155.0 feet	Key Note Segment		5 ft	32			
45267	151.7 to 152.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
45268	155.9 to 156.9 feet	**Vertical Change**	-.56"	5 ft	5	SF	$75	**$375**
45269	159.9 to 160.9 feet	**Vertical Change**	1.91"	5 ft	5	SF	$75	**$375**
45284	178.2 to 184.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
45285	184.7 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45286	188.8 to 192.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
45287	192.6 to 199.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
45288	199.4 to 209.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
45289	212.9 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
45290	227.3 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081047	2ND ST	N C ST	N D ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45291	245.4 to 254.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
45270	265.3 to 266.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
45295	269.7 to 272.2 feet		8.0-9.0%	5 ft	13			
45271	271.7 to 272.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **2ND ST** *Starting at:* **N C ST** **$69,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081042	2ND ST	N C ST	425 N C ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45256	0.0 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
45255	11.8 to 12.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
45257	15.6 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
45258	29.4 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
45259	34.8 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
45260	37.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45261	44.0 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45262	48.3 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,820**
45263	85.6 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**

TOTAL COST FOR: SE *side of* **2ND ST** *Starting at:* **N C ST** **$47,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106080942	3RD ST	401 N GATEWAY DR	N GATEWAY DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44915	3.9 to 4.9 feet	Vertical Change	-.36"	5 ft	5	LF	$75	**$375**
44921	6.3 to 30.6 feet	Key Note Segment		5 ft	122			
44916	31.3 to 39.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	**$1,640**
44917	45.3 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
44922	48.9 to 73.8 feet	Key Note Segment		5 ft	125			
44918	75.8 to 89.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
44923	92.3 to 116.4 feet	Key Note Segment		5 ft	121			
44919	116.8 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
44920	117.8 to 123.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: NW *side of* **3RD ST** *Starting at:* **401 N GATEWAY DR** **$16,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081025	3RD ST	CENTRAL AVE	N B ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45165	15.1 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
45166	40.5 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45167	49.3 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
45162	64.7 to 65.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
45168	94.0 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
45169	120.3 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45170	127.3 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
45171	134.3 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
45163	141.6 to 142.6 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
45172	143.2 to 149.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
45173	152.3 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
45174	166.7 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
45164	177.5 to 178.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
45175	181.2 to 182.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45176	182.1 to 183.1 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: NW *side of* **3RD ST** *Starting at:* **CENTRAL AVE** **$43,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081030	3RD ST	N B ST	N C ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45190	6.5 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45191	10.3 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45192	14.8 to 18.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
45193	43.8 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45194	48.5 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
45177	53.6 to 54.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
45195	59.6 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
45178	70.7 to 71.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
45201	70.9 to 84.6 feet	Key Note Segment		5 ft	68			
45196	85.0 to 88.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$780**
45179	86.9 to 87.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
45202	111.9 to 148.3 feet	Key Note Segment		5 ft	182			
45180	125.0 to 126.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
45181	127.6 to 128.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
45182	146.9 to 147.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
45203	151.6 to 166.8 feet	Key Note Segment		5 ft	76			
45183	152.1 to 153.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
45184	154.1 to 155.1 feet	**Vertical Change**	1.03"	5 ft	5	REF		
45186	190.7 to 191.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
45197	193.3 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
45198	200.1 to 203.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
45199	203.8 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
45187	233.6 to 237.0 feet	**Vertical Change**	.27"	5 ft	17	LF	$75	**$1,275**
45188	240.4 to 241.4 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
45189	243.0 to 244.0 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
45200	255.0 to 257.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NW *side of* **3RD ST** *Starting at:* **N B ST** **$30,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081022	3RD ST	N B ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45148	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
45141	1.5 to 2.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
45149	10.4 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
45150	44.4 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
45151	54.6 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
45158	62.3 to 78.3 feet	Key Note Segment		5 ft	80			
45142	62.8 to 63.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
45143	72.3 to 73.3 feet	**Vertical Change**	-.48"	5 ft	5	REF		
45152	79.2 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
45153	110.6 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
45144	123.5 to 124.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
45159	123.5 to 142.8 feet	Key Note Segment		5 ft	97			
45145	142.1 to 143.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
45160	143.9 to 159.1 feet	Key Note Segment		5 ft	76			
45146	185.2 to 186.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
45161	210.8 to 224.0 feet	Key Note Segment		5 ft	66			
45154	231.1 to 232.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45155	239.3 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45156	246.6 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
45157	269.9 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45147	279.8 to 280.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SE *side of* **3RD ST** *Starting at:* **N B ST** **$49,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081034	3RD ST	N C ST	N D ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45212	1.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
45213	8.7 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
45214	24.1 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45215	41.0 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45216	47.9 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45217	61.5 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
45204	65.6 to 66.6 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
45205	74.0 to 75.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
45218	89.0 to 91.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
45231	90.2 to 91.7 feet		5.0-6.0%	5 ft	8			
45219	91.9 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
45206	100.3 to 101.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
45220	114.6 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
45221	127.9 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
45230	129.2 to 163.7 feet	Key Note Segment		5 ft	173			
45207	145.7 to 146.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
45208	163.2 to 164.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
45222	163.7 to 176.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	66	SF	$40	**$2,620**
45223	179.7 to 181.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45224	184.4 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45225	190.0 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
45209	197.6 to 198.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
45210	214.5 to 215.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
45226	217.5 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
45211	232.0 to 233.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
45227	246.7 to 248.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
45228	260.3 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
45229	266.7 to 274.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081034	3RD ST	N C ST	N D ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW *side of* **3RD ST** *Starting at:* **N C ST**								**$50,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106080938	3RD ST	N D ST	N E ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44886	0.2 to 1.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
44895	1.7 to 8.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,080
44896	12.2 to 27.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	$9,420
44897	29.5 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
44898	33.7 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,260
44899	43.3 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
44900	54.1 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340
44901	65.5 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
44902	75.3 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
44903	87.4 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
44904	98.6 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
44910	100.8 to 117.3 feet	Key Note Segment		5 ft	83			
44887	109.2 to 110.2 feet	Vertical Change	.4"	5 ft	5	REF		
44888	117.3 to 118.3 feet	Vertical Change	-.64"	5 ft	5	REF		
44911	121.6 to 148.3 feet	Key Note Segment		5 ft	134			
44889	163.6 to 164.6 feet	Vertical Change	.36"	5 ft	5	REF		
44905	163.8 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,180
44906	172.0 to 176.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
44912	176.5 to 212.3 feet	Key Note Segment		5 ft	179			
44890	185.9 to 186.9 feet	Vertical Change	.26"	5 ft	5	REF		
44891	203.1 to 204.1 feet	Vertical Change	.3"	5 ft	5	REF		
44907	212.5 to 221.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	43	SF	$40	$1,700
44892	219.7 to 220.7 feet	Vertical Change	.39"	5 ft	5	REF		
44908	231.0 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
44893	245.0 to 246.0 feet	Vertical Change	-.38"	5 ft	5	LF	$75	$375
44909	248.9 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
44913	266.8 to 267.8 feet		5.0-6.0%	5 ft	5			
44914	267.8 to 268.8 feet		6.0-7.0%	5 ft	5			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106080938	3RD ST	N D ST	N E ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44894	270.8 to 271.8 feet	Vertical Change	.46"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **3RD ST** *Starting at:* **N D ST** **$52,505.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081015	3RD ST	N D ST	212 3RD ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45125	0.8 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45115	5.8 to 6.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
45126	18.9 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
45127	27.3 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45128	32.3 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
45129	44.3 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45130	48.1 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
45116	69.0 to 70.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
45131	83.0 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
45132	99.6 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
45133	112.7 to 113.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
45134	117.6 to 122.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
45135	122.6 to 123.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45140	124.7 to 142.5 feet	Key Note Segment		5 ft	89			
45117	124.9 to 127.6 feet	**Vertical Change**	.54"	5 ft	14	REF		
45118	140.7 to 141.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
45119	146.4 to 147.4 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
45120	148.7 to 149.7 feet	**Vertical Change**	3.49"	5 ft	5	SF	$75	**$375**
45136	158.3 to 159.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
45121	159.3 to 160.3 feet	**Vertical Change**	3.37"	5 ft	5	REF		
45137	166.9 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
45122	179.0 to 180.0 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
45123	185.8 to 186.8 feet	**Vertical Change**	1.14"	5 ft	5	REF		
45138	186.1 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
45139	192.3 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
45124	200.9 to 204.0 feet	**Vertical Change**	.35"	5 ft	16	LF	$75	**$1,163**

TOTAL COST FOR: SE *side of* **3RD ST** *Starting at:* **N D ST** **$42,097.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106080947	3RD ST	N E ST	323 N E ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44942	0.0 to 3.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
44943	3.5 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
44944	20.4 to 24.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
44945	28.0 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
44946	37.4 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
44947	40.2 to 41.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
44948	41.3 to 44.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
44954	45.6 to 56.5 feet	Key Note Segment		5 ft	55			
44949	56.5 to 62.7 feet	**Cross Slope (Driveway)**	8.0-9.0%	5 ft	31	SF	$40	**$1,240**
44950	62.7 to 63.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
44951	64.5 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	232	SF	$120	**$27,780**
44940	77.9 to 78.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
44941	86.3 to 87.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44952	112.3 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
44953	125.3 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: SE *side of* **3RD ST** *Starting at:* **N E ST** **$59,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201013	3RD ST	N G ST	N GATEWAY DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40300	2.9 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
40301	10.4 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
40302	34.1 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40303	40.9 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40304	47.8 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40305	55.3 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
40306	63.9 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
40307	77.7 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
40308	86.5 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
40292	121.7 to 122.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
40309	122.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
40317	127.2 to 146.9 feet	Key Note Segment		5 ft	99			
40293	127.9 to 128.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
40310	146.9 to 155.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	45	SF	$40	**$1,800**
40294	151.4 to 152.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
40311	161.0 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
40295	170.6 to 171.6 feet	**Vertical Change**	-.86"	5 ft	5	REF		
40318	173.9 to 196.9 feet	Key Note Segment		5 ft	115			
40312	197.8 to 203.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
40313	204.9 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
40296	212.8 to 213.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
40314	215.8 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
40297	221.3 to 222.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
40298	228.1 to 229.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
40315	234.6 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40316	243.7 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
40299	267.5 to 268.5 feet	**Vertical Change**	.62"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **3RD ST** *Starting at:* **N G ST** **$87,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106080945	3RD ST	N GATEWAY DR	319 N GATEWAY DR	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44929	1.2 to 3.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
44930	3.6 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$22,020**
44931	42.7 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
44932	48.9 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
44933	62.3 to 65.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
44934	65.4 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
44935	69.1 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
44936	76.5 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
44924	81.5 to 82.5 feet	**Vertical Change**	-.41"	5 ft	5	REF		
44925	83.2 to 87.6 feet	**Vertical Change**	1.28"	5 ft	22	REF		
44926	88.9 to 89.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
44937	92.6 to 110.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
44927	93.6 to 94.6 feet	**Vertical Change**	-.44"	5 ft	5	REF		
44938	113.0 to 126.0 feet	Key Note Segment		5 ft	65			
44928	113.4 to 114.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **3RD ST** *Starting at:* **N GATEWAY DR** **$53,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200933	4TH ST	621 4TH ST	621 4TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40126	0.1 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
40127	3.9 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
40129	12.8 to 23.4 feet	Key Note Segment		5 ft	53			
40128	25.4 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,220**
40123	40.4 to 41.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
40124	61.5 to 62.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
40125	67.8 to 68.8 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **621 4TH ST** **$33,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200939	4TH ST	LAKE ST	N A ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40133	0.0 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
40152	7.1 to 24.4 feet	Key Note Segment		5 ft	87			
40134	27.8 to 29.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
40135	39.3 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
40136	52.4 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
40137	70.6 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
40138	77.3 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40139	83.5 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
40140	91.7 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
40141	99.5 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
40142	109.3 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
40153	111.7 to 136.2 feet	Key Note Segment		5 ft	122			
40143	141.6 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
40130	160.1 to 161.1 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
40144	173.7 to 174.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
40131	174.6 to 175.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
40145	176.7 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40146	182.8 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
40147	188.1 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
40148	199.6 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40149	212.0 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40150	225.2 to 229.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
40132	230.8 to 231.8 feet	**Vertical Change**	1.39"	5 ft	5	SF	$75	**$375**
40151	237.5 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **LAKE ST** **$52,230.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201235	4TH ST	LAKE ST	FLUME ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40937	0.2 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
40928	9.1 to 10.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
40938	10.1 to 27.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
40939	28.3 to 31.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
40940	33.3 to 36.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
40941	39.0 to 52.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
40942	56.8 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
40929	61.3 to 62.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
40943	69.0 to 82.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
40944	84.3 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
40945	94.8 to 107.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
40930	98.0 to 99.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
40931	104.4 to 105.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
40953	110.2 to 144.3 feet	Key Note Segment		5 ft	171			
40932	125.7 to 126.7 feet	**Vertical Change**	-.5"	5 ft	5	REF		
40933	127.7 to 128.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
40934	131.4 to 132.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40935	140.5 to 141.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
40954	149.8 to 173.8 feet	Key Note Segment		5 ft	120			
40946	173.8 to 179.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
40947	184.3 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
40948	198.6 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
40949	214.9 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
40950	229.8 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
40951	256.8 to 262.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
40952	264.8 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **LAKE ST** **$96,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200942	4TH ST	N A ST	N B ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40156	0.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
40157	12.7 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40158	23.5 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
40154	43.4 to 44.4 feet	**Vertical Change**	.46"	5 ft	5	REF		
40159	43.8 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40168	45.4 to 60.3 feet	Key Note Segment		5 ft	75			
40160	64.0 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
40161	71.8 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
40162	88.0 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
40163	117.9 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
40169	126.1 to 146.6 feet	Key Note Segment		5 ft	103			
40170	160.3 to 176.9 feet	Key Note Segment		5 ft	83			
40164	179.6 to 182.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
40165	204.3 to 222.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
40166	229.8 to 234.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
40167	238.5 to 267.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
40155	261.5 to 262.5 feet	**Vertical Change**	1.62"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **N A ST** **$60,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201231	4TH ST	N A ST	LAKE ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40917	4.4 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,820**
40918	28.6 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
40919	39.3 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
40916	50.4 to 51.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
40920	108.0 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
40926	119.8 to 142.9 feet	Key Note Segment		5 ft	116			
40921	153.1 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
40927	167.3 to 186.3 feet	Key Note Segment		5 ft	95			
40922	213.6 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
40923	226.2 to 232.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
40924	235.2 to 240.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
40925	260.3 to 267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N A ST** **$43,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200946	4TH ST	N B ST	N C ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40171	4.1 to 5.1 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
40173	14.9 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,100
40174	21.1 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
40175	28.8 to 33.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
40189	38.5 to 55.4 feet	Key Note Segment		5 ft	85			
40176	61.8 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,160
40172	70.8 to 71.8 feet	Vertical Change	-.34"	5 ft	5	REF		
40177	83.6 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,720
40178	112.1 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
40190	118.1 to 141.2 feet	Key Note Segment		5 ft	115			
40179	142.9 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
40191	144.8 to 155.6 feet	Key Note Segment		5 ft	54			
40180	166.8 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
40181	174.9 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
40182	181.8 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
40183	184.4 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
40184	199.2 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
40185	206.3 to 208.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
40186	233.8 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
40187	251.8 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
40188	262.8 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **N B ST** **$57,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201228	4TH ST	N B ST	N A ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40903	20.2 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
40904	28.0 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$22,980**
40902	37.5 to 38.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
40914	66.3 to 81.3 feet	Key Note Segment		5 ft	75			
40905	105.1 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40906	112.2 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
40915	118.8 to 143.0 feet	Key Note Segment		5 ft	121			
40907	144.0 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
40908	164.3 to 166.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
40909	166.5 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
40910	199.1 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40911	202.5 to 203.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40912	231.8 to 235.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
40913	253.0 to 268.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N B ST** **$55,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200950	4TH ST	N C ST	N D ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40194	23.5 to 30.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
40202	37.2 to 50.8 feet	Key Note Segment		5 ft	68			
40195	57.5 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
40196	71.8 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40197	116.6 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
40203	120.8 to 144.3 feet	Key Note Segment		5 ft	118			
40198	145.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40199	180.9 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	260	SF	$120	**$31,140**
40193	181.8 to 182.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40200	236.8 to 248.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
40201	255.8 to 263.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **N C ST** **$58,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201225	4TH ST	N C ST	N B ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40885	6.0 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
40886	19.6 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
40887	37.1 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
40888	74.6 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
40889	92.6 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
40890	104.8 to 118.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
40900	120.4 to 142.8 feet	Key Note Segment		5 ft	112			
40891	147.1 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
40892	158.8 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
40893	174.7 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
40894	177.4 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40895	183.6 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
40883	188.1 to 189.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40901	188.7 to 209.0 feet	Key Note Segment		5 ft	102			
40896	214.8 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
40897	227.0 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40898	232.9 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
40899	255.3 to 261.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N C ST** **$81,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105200955	4TH ST	N D ST	N E ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40204	10.5 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
40205	22.1 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
40206	30.3 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
40207	37.8 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
40208	51.8 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
40209	57.2 to 60.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
40210	60.4 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
40211	70.2 to 72.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
40212	76.6 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40213	87.3 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
40214	103.4 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
40215	108.9 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
40220	120.4 to 140.8 feet	Key Note Segment		5 ft	102			
40216	143.2 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
40221	159.3 to 182.7 feet	Key Note Segment		5 ft	117			
40217	182.7 to 184.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
40218	193.3 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
40222	216.9 to 241.8 feet	Key Note Segment		5 ft	125			
40219	259.6 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **N D ST** **$43,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201223	4TH ST	N D ST	N C ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40869	4.4 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
40870	15.3 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
40871	40.8 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
40872	57.4 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
40873	73.8 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
40882	122.3 to 145.9 feet	Key Note Segment		5 ft	118			
40874	145.9 to 147.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$260**
40875	152.4 to 172.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
40876	172.3 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
40877	185.4 to 197.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
40878	199.1 to 207.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
40879	210.1 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
40880	223.3 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
40881	243.8 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N D ST** **$81,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201220	4TH ST	N E ST	N D ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40851	4.9 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40852	11.7 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
40853	23.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
40854	30.4 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
40855	43.1 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
40856	48.0 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
40857	80.8 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
40858	86.3 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
40859	94.2 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40860	102.5 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
40868	124.1 to 143.3 feet	Key Note Segment		5 ft	96			
40861	143.3 to 171.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	142	SF	$40	**$5,700**
40850	150.2 to 151.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
40862	180.2 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
40863	190.3 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40864	196.8 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
40865	207.1 to 222.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
40866	225.1 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
40867	249.4 to 267.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N E ST** **$58,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105200959	4TH ST	N E ST	N GATEWAY DR	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40230	5.8 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40231	16.0 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
40223	22.1 to 23.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
40237	45.3 to 60.0 feet	Key Note Segment		5 ft	74			
40224	70.9 to 71.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
40225	84.9 to 85.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
40226	90.1 to 91.1 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
40238	101.4 to 119.3 feet	Key Note Segment		5 ft	90			
40227	103.6 to 104.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
40240	119.3 to 120.3 feet		6.0-7.0%	5 ft	5			
40241	120.3 to 121.8 feet		5.0-6.0%	5 ft	8			
40242	121.8 to 122.8 feet		6.0-7.0%	5 ft	5			
40243	122.8 to 125.9 feet		5.0-6.0%	5 ft	16			
40232	128.0 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
40244	135.7 to 138.4 feet		5.0-6.0%	5 ft	14			
40245	135.7 to 140.8 feet	Running Slope	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
40239	141.8 to 176.2 feet	Key Note Segment		5 ft	172			
40228	142.7 to 143.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
40233	176.2 to 188.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	61	SF	$40	**$2,440**
40234	191.5 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
40229	200.7 to 201.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
40235	224.0 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
40236	235.2 to 239.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: SW *side of* **4TH ST** *Starting at:* **N E ST** **$30,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201004	4TH ST	N GATEWAY DR	N G ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40250	1.3 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40246	4.6 to 5.6 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
40251	6.3 to 15.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
40262	15.3 to 39.8 feet	Key Note Segment		5 ft	122			
40252	39.8 to 50.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
40247	44.1 to 45.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40253	53.3 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
40248	60.9 to 61.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
40254	86.1 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
40249	96.2 to 97.2 feet	**Vertical Change**	1.02"	5 ft	5	REF		
40255	97.2 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40256	99.8 to 103.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
40257	103.5 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
40263	114.3 to 138.3 feet	Key Note Segment		5 ft	120			
40258	155.2 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
40259	206.3 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
40260	235.6 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
40261	255.7 to 262.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
40264	262.0 to 263.2 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: NW *side of* **4TH ST** *Starting at:* **N GATEWAY DR** **$50,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201216	4TH ST	N GATEWAY DR	N E ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40836	2.8 to 28.6 feet	Key Note Segment		5 ft	129			
40826	3.0 to 4.0 feet	Vertical Change	.85"	5 ft	5	REF		
40829	34.7 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
40830	44.6 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
40831	59.8 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
40837	65.3 to 89.1 feet	Key Note Segment		5 ft	119			
40832	89.1 to 91.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	**$420**
40840	92.7 to 94.8 feet		5.0-6.0%	5 ft	11			
40841	92.7 to 94.8 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
40838	119.9 to 137.1 feet	Key Note Segment		5 ft	86			
40842	137.6 to 139.1 feet		5.0-6.0%	5 ft	8			
40833	143.7 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
40827	165.3 to 166.3 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
40828	179.7 to 180.7 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
40839	182.1 to 195.0 feet	Key Note Segment		5 ft	65			
40843	200.5 to 201.9 feet		5.0-6.0%	5 ft	7			
40844	207.5 to 209.3 feet		5.0-6.0%	5 ft	9			
40834	208.8 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
40845	210.4 to 211.4 feet		6.0-7.0%	5 ft	5			
40846	211.4 to 214.7 feet		5.0-6.0%	5 ft	17			
40847	211.4 to 214.7 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
40835	218.1 to 238.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
40848	223.3 to 224.8 feet		6.0-7.0%	5 ft	8			
40849	224.8 to 226.0 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: SE *side of* **4TH ST** *Starting at:* **N GATEWAY DR** **$23,970.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108100935	5TH ST	201 HIGH ST	HIGH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55241	0.0 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
55236	0.5 to 1.5 feet	**Vertical Change**	.58"	5 ft	5	REF		
55237	9.8 to 10.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
55242	16.6 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
55243	26.6 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
55251	31.3 to 49.8 feet	Key Note Segment		5 ft	93			
55238	39.8 to 40.8 feet	**Vertical Change**	-.53"	5 ft	5	REF		
55239	49.1 to 50.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
55244	51.2 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
55245	71.6 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55246	79.6 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
55247	82.9 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
55248	91.8 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
55240	93.0 to 94.0 feet	**Vertical Change**	2.94"	5 ft	5	REF		
55249	97.5 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
55250	104.7 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **201 HIGH ST** **$36,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150841	5TH ST	201 N O ST	N O ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53559	0.5 to 11.7 feet	Key Note Segment		5 ft	56			
53542	13.4 to 14.4 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
53561	13.8 to 15.0 feet		5.0-6.0%	5 ft	6			
53543	16.0 to 17.0 feet	Vertical Change	.47"	5 ft	5	REF		
53553	16.3 to 21.7 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	27	SF	$120	$3,240
53544	20.4 to 21.4 feet	Vertical Change	-.31"	5 ft	5	REF		
53545	24.7 to 25.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
53554	33.3 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
53546	50.1 to 51.1 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
53547	57.4 to 58.4 feet	Vertical Change	-.71"	5 ft	5	SF	$75	$375
53560	71.6 to 85.0 feet	Key Note Segment		5 ft	67			
53548	81.9 to 82.9 feet	Vertical Change	.27"	5 ft	5	REF		
53555	85.5 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
53549	91.3 to 92.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
53562	91.3 to 92.3 feet		6.0-7.0%	5 ft	5			
53556	94.5 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
53550	100.3 to 101.3 feet	Vertical Change	-.64"	5 ft	5	SF	$75	$375
53557	102.7 to 109.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
53551	121.9 to 122.9 feet	Vertical Change	-1.19"	5 ft	5	SF	$75	$375
53558	125.3 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
53552	125.9 to 126.9 feet	Vertical Change	.34"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **201 N O ST** **$20,565.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150801	5TH ST	323 5TH ST	N I ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53205	0.2 to 10.8 feet	Key Note Segment		5 ft	53			
53201	10.8 to 19.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	42	SF	$40	$1,680
53202	22.8 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,120
53198	30.5 to 31.5 feet	Vertical Change	-.28"	5 ft	5	REF		
53203	41.8 to 46.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
53199	49.9 to 50.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
53206	51.7 to 71.6 feet	Key Note Segment		5 ft	99			
53204	71.6 to 98.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	135	SF	$40	$5,400
53200	87.5 to 88.5 feet	Vertical Change	-.27"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **323 5TH ST** **$19,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150741	5TH ST	600 5TH ST	N K ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53058	2.2 to 8.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
53054	7.1 to 8.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
53059	9.3 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
53055	17.0 to 18.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
53060	17.5 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
53061	20.7 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
53065	39.7 to 58.1 feet	Key Note Segment		5 ft	92			
53062	71.4 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
53057	86.4 to 87.4 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
53063	88.1 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
53064	107.6 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **600 5TH ST** **$46,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150832	5TH ST	817 5TH ST	N N ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53486	3.3 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
53487	17.2 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
53493	19.8 to 52.5 feet	Key Note Segment		5 ft	164			
53488	52.5 to 55.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
53489	58.3 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
53490	91.3 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
53491	103.8 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
53492	113.1 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **817 5TH ST** **$38,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108100923	5TH ST	908 5TH ST	920 5TH ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55210	3.6 to 4.6 feet	Vertical Change	.43"	5 ft	5	LF	$75	**$375**
55211	11.7 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55212	18.3 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
55213	24.0 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
55214	31.3 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55215	37.8 to 38.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **908 5TH ST** **$5,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101000	5TH ST	FLUME ST	S LAKE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55404	0.1 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
55405	12.5 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
55406	23.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
55396	40.1 to 41.1 feet	Vertical Change	.49"	5 ft	5	LF	$75	$375
55407	42.6 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
55408	48.1 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
55409	52.8 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
55397	61.2 to 62.2 feet	Vertical Change	.37"	5 ft	5	REF		
55410	62.0 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	$17,400
55422	74.7 to 83.5 feet	Key Note Segment		5 ft	44			
55398	85.0 to 86.0 feet	Vertical Change	-.39"	5 ft	5	REF		
55411	110.8 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
55423	125.1 to 143.9 feet	Key Note Segment		5 ft	94			
55399	125.7 to 126.7 feet	Vertical Change	-.35"	5 ft	5	REF		
55412	143.9 to 145.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$380
55424	145.8 to 160.9 feet	Key Note Segment		5 ft	75			
55400	162.5 to 163.5 feet	Vertical Change	.5"	5 ft	5	REF		
55413	162.6 to 164.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
55414	167.3 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
55415	178.3 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
55416	193.4 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
55417	203.3 to 206.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
55418	209.5 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
55401	215.4 to 216.4 feet	Vertical Change	.3"	5 ft	5	REF		
55402	218.4 to 219.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
55419	222.3 to 229.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
55403	224.7 to 228.0 feet	Vertical Change	.26"	5 ft	17	REF		
55420	242.4 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101000	5TH ST	FLUME ST	S LAKE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55421	256.4 to 271.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **FLUME ST** **$80,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108100905	5TH ST	FLUME ST	HIGH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55114	0.2 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
55115	18.4 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
55110	28.8 to 29.8 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
55116	32.5 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
55117	36.6 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
55118	53.6 to 69.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
55119	71.9 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,540**
55120	83.6 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
55124	96.2 to 115.4 feet	Key Note Segment		5 ft	96			
55121	115.6 to 121.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
55111	117.5 to 118.5 feet	**Vertical Change**	1.14"	5 ft	5	REF		
55122	125.0 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
55125	127.2 to 144.9 feet	Key Note Segment		5 ft	89			
55123	151.1 to 160.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
55112	159.6 to 160.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
55126	171.7 to 195.6 feet	Key Note Segment		5 ft	120			
55113	172.6 to 173.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
55127	246.1 to 264.3 feet	Key Note Segment		5 ft	91			

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **FLUME ST** **$58,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108100945	5TH ST	HIGH ST	FLUME ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55319	0.1 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
55320	15.4 to 29.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
55321	30.5 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
55308	33.5 to 34.5 feet	**Vertical Change**	-.48"	5 ft	5	REF		
55322	37.6 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
55323	41.2 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
55324	62.2 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
55325	79.1 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
55326	88.1 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
55309	101.0 to 102.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
55327	102.3 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
55310	104.2 to 105.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
55328	109.1 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
55311	121.0 to 122.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
55329	122.3 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
55330	129.5 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
55331	135.8 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
55332	147.8 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,620**
55312	153.1 to 154.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
55313	171.8 to 172.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
55314	174.2 to 175.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
55333	187.2 to 188.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
55334	189.2 to 195.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
55335	195.3 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
55315	200.1 to 201.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
55336	212.9 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
55337	221.2 to 229.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
55338	229.5 to 237.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108100945	5TH ST	HIGH ST	FLUME ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55316	245.1 to 246.1 feet	Vertical Change	.55"	5 ft	5	SF	$75	$375
55339	246.6 to 262.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,240
55317	252.7 to 253.7 feet	Vertical Change	-.42"	5 ft	5	REF		
55340	262.2 to 267.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
55318	267.9 to 268.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **HIGH ST** **$117,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108100915	5TH ST	HIGH ST	804 5TH ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55189	2.8 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
55190	12.0 to 15.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
55194	15.6 to 33.6 feet	Key Note Segment		5 ft	90			
55191	33.6 to 51.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	89	SF	$40	**$3,540**
55187	42.4 to 43.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
55195	52.1 to 69.6 feet	Key Note Segment		5 ft	87			
55192	72.0 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55188	76.7 to 77.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
55193	78.8 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **HIGH ST** **$13,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211411	5TH ST	N A ST	N B ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43388	3.6 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
43389	15.7 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43360	17.1 to 18.1 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
43390	22.8 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
43361	38.5 to 39.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
43391	42.4 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
43392	51.6 to 57.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
43362	57.3 to 58.3 feet	**Vertical Change**	2.21"	5 ft	5	REF		
43393	59.8 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43363	60.3 to 61.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
43411	63.6 to 70.3 feet	Key Note Segment		5 ft	34			
43394	70.3 to 76.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
43395	78.8 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
43364	81.5 to 82.5 feet	**Vertical Change**	1.01"	5 ft	5	REF		
43365	99.5 to 100.5 feet	**Vertical Change**	.67"	5 ft	5	REF		
43396	99.9 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
43366	101.2 to 102.2 feet	**Vertical Change**	1.71"	5 ft	5	REF		
43367	104.7 to 105.7 feet	**Vertical Change**	2.66"	5 ft	5	SF	$75	**$375**
43397	107.3 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
43368	109.9 to 110.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
43398	116.6 to 117.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
43369	120.0 to 121.0 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
43370	124.7 to 125.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
43399	126.2 to 127.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
43412	127.4 to 145.3 feet	Key Note Segment		5 ft	90			
43400	145.4 to 146.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
43401	157.3 to 158.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
43372	161.9 to 162.9 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211411	5TH ST	N A ST	N B ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43373	166.2 to 169.0 feet	Vertical Change	.43"	5 ft	14	LF	$75	$1,050
43374	174.7 to 180.1 feet	Vertical Change	.29"	5 ft	27	REF		
43402	175.2 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
43375	185.0 to 186.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
43403	186.8 to 189.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
43404	189.6 to 199.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
43376	190.3 to 191.3 feet	Vertical Change	.32"	5 ft	5	REF		
43377	193.6 to 194.6 feet	Vertical Change	-.42"	5 ft	5	REF		
43378	196.2 to 197.2 feet	Vertical Change	.28"	5 ft	5	REF		
43405	200.7 to 202.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
43379	203.1 to 204.1 feet	Vertical Change	2.06"	5 ft	5	SF	$75	$375
43380	205.1 to 206.1 feet	Vertical Change	.5"	5 ft	5	REF		
43406	205.2 to 220.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,060
43407	223.2 to 227.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
43381	228.7 to 229.7 feet	Vertical Change	.28"	5 ft	5	REF		
43408	229.3 to 232.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
43382	250.8 to 251.8 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
43383	254.8 to 255.8 feet	Vertical Change	.64"	5 ft	5	SF	$75	$375
43384	256.5 to 257.5 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
43385	258.4 to 261.1 feet	Vertical Change	.8"	5 ft	14	SF	$75	$1,013
43386	262.2 to 265.7 feet	Vertical Change	.47"	5 ft	18	REF		
43409	263.2 to 264.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600
43387	266.7 to 267.7 feet	Vertical Change	2.04"	5 ft	5	SF	$75	$375
43410	268.6 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N A ST** **$61,422.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211436	5TH ST	N A ST	N LAKE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43584	0.0 to 12.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
43581	9.7 to 10.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
43585	15.8 to 23.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
43586	25.3 to 30.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
43587	31.4 to 32.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
43588	34.9 to 43.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
43589	46.1 to 56.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
43590	58.7 to 62.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
43591	65.7 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
43582	74.8 to 75.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
43592	75.8 to 77.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
43593	78.2 to 79.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
43594	81.8 to 84.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
43595	84.0 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43607	86.1 to 102.5 feet	Key Note Segment		5 ft	82			
43596	103.0 to 104.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
43597	107.8 to 110.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
43608	111.8 to 125.7 feet	Key Note Segment		5 ft	70			
43583	113.0 to 114.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
43598	126.3 to 127.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
43609	127.6 to 146.8 feet	Key Note Segment		5 ft	96			
43611	146.8 to 148.1 feet		6.0-7.0%	5 ft	6			
43599	147.7 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
43600	162.1 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
43601	172.9 to 182.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
43602	183.1 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43603	193.1 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43604	203.3 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211436	5TH ST	N A ST	N LAKE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43605	221.6 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
43610	224.3 to 247.3 feet	Key Note Segment		5 ft	115			
43606	273.3 to 276.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
43612	275.8 to 277.3 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N A ST** **$67,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211415	5TH ST	N B ST	N C ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43416	2.8 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
43413	7.7 to 8.7 feet	**Vertical Change**	3.43"	5 ft	5	REF		
43417	24.3 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
43418	31.5 to 48.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
43414	42.4 to 43.4 feet	**Vertical Change**	3.53"	5 ft	5	REF		
43419	50.7 to 57.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
43420	58.1 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
43421	64.9 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
43422	73.8 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
43434	80.3 to 89.6 feet	Key Note Segment		5 ft	47			
43415	89.6 to 90.6 feet	**Vertical Change**	.6"	5 ft	5	REF		
43423	90.5 to 92.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	8	SF	$40	**$300**
43435	103.1 to 114.4 feet	Key Note Segment		5 ft	57			
43424	114.4 to 116.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
43436	117.8 to 144.8 feet	Key Note Segment		5 ft	135			
43425	158.3 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
43426	170.8 to 178.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
43427	178.9 to 211.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
43428	221.7 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
43429	230.4 to 231.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
43430	232.1 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
43431	248.2 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
43432	256.9 to 264.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
43433	271.6 to 273.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N B ST** **$83,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211433	5TH ST	N B ST	N A ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43563	1.1 to 15.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,700**
43560	13.4 to 14.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
43564	20.1 to 39.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,640**
43565	40.4 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43566	47.7 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
43567	52.3 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
43568	70.8 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
43561	72.2 to 73.2 feet	**Vertical Change**	.63"	5 ft	5	REF		
43579	76.4 to 84.1 feet	Key Note Segment		5 ft	38			
43569	89.7 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
43562	113.9 to 114.9 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
43570	117.0 to 122.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
43571	123.6 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43580	125.6 to 160.2 feet	Key Note Segment		5 ft	173			
43572	164.8 to 166.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43573	183.0 to 185.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
43574	203.2 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
43575	226.6 to 235.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
43576	239.2 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
43577	243.1 to 244.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
43578	255.3 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N B ST** **$64,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211417	5TH ST	N C ST	N D ST	111

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43441	0.6 to 21.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,360**
43437	6.7 to 59.9 feet	**Vertical Change**	3.51"	5 ft	266	REF		
43442	23.9 to 25.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
43443	25.1 to 28.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
43444	28.3 to 32.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
43445	32.8 to 34.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
43446	35.9 to 38.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
43447	41.4 to 57.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
43448	57.5 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
43449	61.8 to 65.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
43450	66.2 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
43451	76.9 to 80.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
43452	80.8 to 84.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
43453	85.6 to 104.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	97	SF	$120	**$11,580**
43454	108.4 to 125.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	84	SF	$120	**$10,020**
43438	121.3 to 122.3 feet	**Vertical Change**	-.43"	5 ft	5	REF		
43455	127.1 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43467	128.3 to 148.3 feet	Key Note Segment		5 ft	100			
43439	128.6 to 129.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
43456	148.3 to 158.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,940**
43457	160.2 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
43468	167.0 to 185.0 feet	Key Note Segment		5 ft	90			
43458	185.5 to 187.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
43459	189.3 to 192.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
43460	192.4 to 197.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
43461	198.4 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
43462	206.8 to 212.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
43463	212.6 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211417	5TH ST	N C ST	N D ST	111

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43464	259.0 to 260.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43465	262.8 to 263.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
43466	265.3 to 272.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
43440	266.5 to 267.5 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N C ST** **$111,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211430	5TH ST	N C ST	N B ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43530	0.6 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$1,020**
43531	8.3 to 17.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
43532	21.6 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
43529	27.4 to 30.6 feet	**Vertical Change**	.27"	5 ft	16	LF	$75	**$1,200**
43533	31.0 to 36.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
43534	36.5 to 49.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	64	SF	$120	**$7,680**
43535	50.2 to 55.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
43536	58.3 to 62.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
43537	63.1 to 65.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
43538	68.7 to 70.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$900**
43539	72.8 to 74.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
43540	74.8 to 84.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
43541	89.6 to 107.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
43542	111.7 to 113.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
43543	113.4 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43557	123.3 to 142.3 feet	Key Note Segment		5 ft	95			
43559	143.0 to 144.5 feet		5.0-6.0%	5 ft	8			
43544	144.9 to 152.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
43545	164.8 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
43558	173.2 to 182.3 feet	Key Note Segment		5 ft	46			
43546	183.4 to 185.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	10	SF	$120	**$1,140**
43547	186.0 to 187.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
43548	188.6 to 192.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
43549	192.3 to 194.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
43550	194.8 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
43551	199.0 to 203.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
43552	209.8 to 211.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43553	217.3 to 229.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211430	5TH ST	N C ST	N B ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43554	231.9 to 233.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
43555	233.6 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
43556	242.8 to 266.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N C ST** **$92,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211420	5TH ST	N D ST	N E ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43484	1.5 to 111.2 feet	Key Note Segment		5 ft	549			
43469	111.4 to 112.4 feet	Vertical Change	.5"	5 ft	5	REF		
43472	112.2 to 114.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
43473	114.7 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
43474	119.1 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
43475	125.3 to 126.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
43485	127.6 to 146.3 feet	Key Note Segment		5 ft	94			
43476	146.3 to 148.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	$480
43486	152.3 to 173.5 feet	Key Note Segment		5 ft	106			
43477	174.8 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
43478	185.6 to 189.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
43471	189.0 to 190.0 feet	Vertical Change	.34"	5 ft	5	REF		
43479	189.6 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
43480	212.3 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
43481	217.8 to 252.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	$20,940
43482	252.7 to 264.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	$6,960
43483	267.9 to 276.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,920

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N D ST** **$57,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211427	5TH ST	N D ST	N C ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43513	0.0 to 7.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
43528	0.9 to 2.2 feet		5.0-6.0%	5 ft	7			
43514	7.9 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
43509	12.6 to 13.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
43515	23.2 to 51.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
43516	55.3 to 92.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	186	SF	$120	**$22,320**
43517	93.3 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
43518	107.1 to 109.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
43519	109.4 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
43520	117.3 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
43527	125.3 to 140.8 feet	Key Note Segment		5 ft	78			
43510	127.4 to 128.4 feet	**Vertical Change**	-.69"	5 ft	5	REF		
43511	133.5 to 134.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
43512	142.2 to 143.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
43521	142.5 to 157.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,760**
43522	157.3 to 167.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,940**
43523	172.5 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
43524	180.9 to 184.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
43525	201.5 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
43526	226.1 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N D ST** **$95,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105211424	5TH ST	N E ST	N D ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43493	0.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,580**
43494	41.6 to 44.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
43495	44.7 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
43496	79.4 to 82.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
43506	82.0 to 104.3 feet	Key Note Segment		5 ft	112			
43488	94.2 to 95.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
43497	104.3 to 109.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
43498	109.8 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
43507	122.8 to 144.9 feet	Key Note Segment		5 ft	111			
43489	123.9 to 124.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
43499	149.4 to 164.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
43500	164.7 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
43508	169.5 to 185.5 feet	Key Note Segment		5 ft	80			
43501	197.2 to 201.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
43490	201.4 to 202.4 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
43491	210.8 to 211.8 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
43502	219.3 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43503	234.8 to 236.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43504	244.8 to 257.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
43505	261.0 to 266.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
43492	266.7 to 267.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N E ST** **$81,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150805	5TH ST	N I ST	N K ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53216	0.0 to 1.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
53217	3.2 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
53218	7.2 to 18.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
53219	22.3 to 47.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
53220	49.8 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53221	54.8 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
53250	78.8 to 101.0 feet	Key Note Segment		5 ft	111			
53207	116.4 to 117.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
53222	117.1 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
53223	131.8 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
53251	133.6 to 143.6 feet	Key Note Segment		5 ft	50			
53224	144.4 to 147.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$680**
53225	168.1 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
53252	173.7 to 203.5 feet	Key Note Segment		5 ft	149			
53208	203.9 to 204.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
53226	204.3 to 206.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$460**
53227	209.3 to 214.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
53228	217.3 to 233.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
53229	235.7 to 237.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
53209	236.3 to 237.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
53230	237.9 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
53231	264.5 to 267.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
53232	271.8 to 276.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
53233	283.1 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,260**
53234	314.0 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
53235	345.4 to 374.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
53253	376.8 to 399.3 feet	Key Note Segment		5 ft	113			
53236	399.3 to 401.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150805	5TH ST	N I ST	N K ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53237	401.1 to 406.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
53238	407.2 to 459.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	261	SF	$120	**$31,260**
53210	460.3 to 461.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
53239	462.6 to 464.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
53240	465.3 to 468.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
53254	470.6 to 484.9 feet	Key Note Segment		5 ft	72			
53255	489.8 to 508.1 feet	Key Note Segment		5 ft	92			
53211	496.6 to 497.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
53241	509.3 to 515.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
53242	515.3 to 519.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
53243	520.0 to 521.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
53244	521.4 to 527.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
53245	529.8 to 532.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
53212	532.6 to 533.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
53246	534.6 to 539.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
53213	537.8 to 538.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
53256	538.1 to 539.3 feet		7.0-8.0%	5 ft	6			
53214	541.7 to 542.7 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
53215	543.6 to 544.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
53247	544.8 to 548.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	18	SF	$120	**$2,100**
53248	556.6 to 559.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
53249	570.2 to 574.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N I ST** **$178,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150800	5TH ST	N I ST	312 5TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53187	0.3 to 11.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
53188	20.8 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
53189	25.8 to 28.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
53190	30.6 to 38.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
53191	44.7 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
53192	54.5 to 57.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
53183	55.1 to 56.1 feet	**Vertical Change**	-.96"	5 ft	5	REF		
53193	60.3 to 67.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
53194	70.5 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
53196	85.3 to 110.5 feet	Key Note Segment		5 ft	126			
53195	111.1 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
53186	112.9 to 113.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N I ST** **$36,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150757	5TH ST	N J ST	413 YOSEMITE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53177	2.1 to 3.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53178	31.0 to 32.0 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
53180	69.4 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
53181	93.4 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
53182	120.3 to 134.8 feet	Key Note Segment		5 ft	73			
53179	120.5 to 121.5 feet	**Vertical Change**	-.49"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N J ST** **$10,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150814	5TH ST	N K ST	N L ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53322	4.1 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
53323	31.2 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
53324	36.8 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53325	40.7 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
53326	44.5 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
53319	51.9 to 52.9 feet	**Vertical Change**	.71"	5 ft	5	REF		
53327	55.2 to 67.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
53328	69.5 to 73.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
53329	75.8 to 77.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
53330	78.5 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53331	91.6 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
53332	96.8 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53320	97.8 to 98.8 feet	**Vertical Change**	.6"	5 ft	5	REF		
53333	100.8 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
53334	124.3 to 126.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
53346	126.3 to 146.7 feet	Key Note Segment		5 ft	102			
53335	155.0 to 168.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
53336	173.3 to 191.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
53321	190.3 to 191.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
53337	194.8 to 198.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
53338	202.5 to 208.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
53339	209.0 to 210.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
53340	212.2 to 217.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
53341	218.9 to 228.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
53342	232.8 to 234.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
53343	236.5 to 238.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
53344	239.3 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
53345	254.8 to 275.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150814	5TH ST	N K ST	N L ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N K ST**								**$109,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150822	5TH ST	N L ST	N M ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53430	0.3 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
53431	2.7 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53432	6.7 to 13.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
53422	13.6 to 14.6 feet	**Vertical Change**	-.76"	5 ft	5	SF	$75	**$375**
53423	37.3 to 38.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
53424	39.4 to 40.4 feet	**Vertical Change**	1.43"	5 ft	5	SF	$75	**$375**
53433	46.3 to 47.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53434	49.9 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53435	66.4 to 72.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
53436	72.3 to 73.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
53437	78.2 to 97.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
53438	100.3 to 101.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
53439	101.7 to 105.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
53448	112.3 to 152.8 feet	Key Note Segment		5 ft	203			
53426	119.9 to 120.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
53427	121.8 to 122.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
53428	134.8 to 138.1 feet	**Vertical Change**	.28"	5 ft	16	REF		
53440	153.1 to 155.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
53441	158.1 to 159.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
53442	162.0 to 166.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
53443	168.8 to 179.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
53444	183.8 to 185.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
53445	191.3 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53429	197.4 to 198.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
53446	216.5 to 230.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
53447	233.4 to 239.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N L ST** **$52,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211408	5TH ST	N LAKE ST	N A ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43338	0.1 to 6.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
43339	10.4 to 23.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
43340	26.4 to 34.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
43341	37.8 to 39.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
43335	39.6 to 40.6 feet	**Vertical Change**	1.95"	5 ft	5	REF		
43342	40.6 to 42.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
43343	42.6 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,300**
43336	75.9 to 76.9 feet	**Vertical Change**	2.13"	5 ft	5	REF		
43344	82.0 to 85.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
43356	85.3 to 94.2 feet	Key Note Segment		5 ft	45			
43345	94.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
43357	107.4 to 117.3 feet	Key Note Segment		5 ft	50			
43346	117.3 to 121.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$920**
43358	121.9 to 143.8 feet	Key Note Segment		5 ft	110			
43337	123.6 to 124.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
43347	146.8 to 151.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
43348	151.4 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
43349	158.4 to 160.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
43359	186.2 to 199.7 feet	Key Note Segment		5 ft	68			
43350	202.1 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43351	205.2 to 209.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
43352	213.6 to 230.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	84	SF	$120	**$10,020**
43353	231.9 to 234.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
43354	235.8 to 240.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
43355	240.9 to 270.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,640**

TOTAL COST FOR: NW *side of* **5TH ST** *Starting at:* **N LAKE ST** **$92,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150910	5TH ST	N Q ST	131 N Q ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53682	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
53683	2.5 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
53684	10.5 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
53677	13.7 to 14.7 feet	**Vertical Change**	-.81"	5 ft	5	REF		
53678	22.3 to 23.3 feet	**Vertical Change**	-1.59"	5 ft	5	SF	$75	**$375**
53685	26.8 to 30.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	18	SF	$120	**$2,160**
53686	34.5 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
53679	37.4 to 38.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
53687	42.7 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53688	47.6 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
53680	48.1 to 49.1 feet	**Vertical Change**	1.22"	5 ft	5	REF		
53689	58.7 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
53690	67.0 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
53691	75.8 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	**$27,900**
53692	124.3 to 141.9 feet	Key Note Segment		5 ft	88			
53681	125.6 to 126.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **N Q ST** **$45,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150901	5TH ST	PINE ST	N Q ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53623	0.0 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
53624	22.9 to 36.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
53625	42.1 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
53626	51.1 to 59.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
53627	63.5 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
53628	75.3 to 78.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
53629	78.4 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,380**
53619	86.1 to 87.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
53620	103.3 to 104.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
53621	111.9 to 112.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
53630	114.4 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
53640	122.6 to 140.0 feet	Key Note Segment		5 ft	87			
53631	140.8 to 143.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
53632	147.1 to 158.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
53633	159.3 to 162.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,980**
53634	162.6 to 181.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
53635	183.7 to 185.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
53641	185.7 to 197.9 feet	Key Note Segment		5 ft	61			
53636	198.3 to 221.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	114	SF	$40	**$4,540**
53637	223.9 to 231.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
53642	233.3 to 257.9 feet	Key Note Segment		5 ft	123			
53638	257.9 to 262.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$980**
53639	262.8 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **PINE ST** **$99,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101219	5TH ST	S LAKE ST	FLUME ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56227	0.0 to 7.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
56228	7.3 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
56229	8.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56230	21.8 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
56231	26.5 to 37.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
56232	37.4 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
56218	46.7 to 47.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56233	46.7 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
56219	49.9 to 50.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
56245	56.0 to 70.2 feet	Key Note Segment		5 ft	71			
56220	63.8 to 64.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
56234	70.3 to 89.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	97	SF	$40	**$3,860**
56221	94.2 to 95.2 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
56249	94.7 to 96.3 feet		5.0-6.0%	5 ft	8			
56235	99.0 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
56236	111.0 to 112.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
56237	114.3 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
56246	127.2 to 145.2 feet	Key Note Segment		5 ft	90			
56238	145.2 to 146.3 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$220**
56222	145.7 to 146.7 feet	**Vertical Change**	-1.19"	5 ft	5	REF		
56239	148.0 to 149.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
56240	149.3 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,540**
56223	152.2 to 153.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
56241	172.5 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
56242	180.7 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56247	182.8 to 198.3 feet	Key Note Segment		5 ft	78			
56243	198.3 to 227.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	144	SF	$40	**$5,740**
56224	210.4 to 211.4 feet	**Vertical Change**	1.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101219	5TH ST	S LAKE ST	FLUME ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56225	218.3 to 219.3 feet	Vertical Change	.41"	5 ft	5	REF		
56248	227.0 to 234.7 feet	Key Note Segment		5 ft	39			
56244	234.8 to 274.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	197	SF	$40	**$7,880**
56226	253.8 to 254.8 feet	Vertical Change	-.32"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **S LAKE ST** **$64,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150733	5TH ST	S M ST	716 5TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52978	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
52973	0.5 to 1.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
52979	4.2 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
52974	7.8 to 8.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
52975	21.8 to 22.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
52976	41.6 to 42.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
52980	46.0 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
52977	47.9 to 48.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
52981	54.4 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
52982	61.1 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52983	77.3 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
52984	91.9 to 93.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
52985	97.4 to 105.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
52986	108.5 to 109.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
52987	109.9 to 111.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
52988	112.7 to 114.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: SE *side of* **5TH ST** *Starting at:* **S M ST** **$31,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101320	6TH ST	1005 6TH ST	1005 6TH ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131686	0.0 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
131687	11.6 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
131684	14.4 to 15.4 feet	**Vertical Change**	.68"	5 ft	5	REF		
131689	20.2 to 33.6 feet	Key Note Segment		5 ft	67			
131688	36.3 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
131685	38.8 to 39.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **1005 6TH ST** **$12,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140927	6TH ST	1025 S P ST	S P ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52747	5.1 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
52748	24.5 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
52749	32.0 to 33.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
52750	41.9 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
52751	46.8 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
52744	71.4 to 72.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
52745	76.3 to 77.3 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
52752	82.6 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **1025 S P ST** **$26,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091042	6TH ST	123 S LAKE ST	S LAKE ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47270	0.0 to 3.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
47271	4.8 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
47268	16.3 to 17.3 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
47269	18.4 to 19.4 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
47278	19.9 to 44.3 feet	Key Note Segment		5 ft	122			
47272	56.3 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
47273	66.0 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
47274	85.0 to 86.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
47275	89.3 to 90.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47276	92.1 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
47277	110.6 to 118.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **123 S LAKE ST** **$37,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091009	6TH ST	516 6TH ST	S LAKE ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47058	0.3 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
47059	14.3 to 18.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
47060	18.9 to 21.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
47053	22.2 to 23.2 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
47061	27.0 to 29.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
47062	30.9 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
47063	36.5 to 41.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
47064	42.1 to 45.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
47054	43.3 to 44.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
47065	46.7 to 52.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
47066	54.3 to 55.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
47055	56.5 to 57.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
47056	58.7 to 59.7 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
47067	64.1 to 65.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
47068	68.8 to 69.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
47069	73.6 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
47057	73.9 to 74.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
47070	80.7 to 102.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
47071	104.5 to 114.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **516 6TH ST** **$40,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091040	6TH ST	617 6TH ST	615 6TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47261	0.8 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
47259	17.2 to 18.2 feet	**Vertical Change**	-.62"	5 ft	5	SF	$75	**$375**
47267	17.3 to 34.5 feet	Key Note Segment		5 ft	86			
47262	35.3 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47263	40.5 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
47264	44.9 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,240**
47260	46.1 to 47.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
47265	71.3 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
47266	79.4 to 81.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **617 6TH ST** **$33,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091014	6TH ST	620 6TH ST	620 6TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47100	0.9 to 22.4 feet	Key Note Segment		5 ft	108			
47082	5.2 to 6.2 feet	Vertical Change	.26"	5 ft	5	REF		
47089	22.4 to 26.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	**$840**
47090	29.0 to 32.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
47091	32.2 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
47101	39.3 to 62.3 feet	Key Note Segment		5 ft	115			
47083	54.4 to 55.4 feet	Vertical Change	.38"	5 ft	5	REF		
47092	62.3 to 65.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	**$720**
47093	66.3 to 68.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
47094	68.8 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
47084	68.9 to 69.9 feet	Vertical Change	.26"	5 ft	5	REF		
47085	78.8 to 79.8 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
47086	82.3 to 83.3 feet	Vertical Change	-.49"	5 ft	5	REF		
47095	82.8 to 83.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
47096	84.8 to 86.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
47087	85.8 to 86.8 feet	Vertical Change	.42"	5 ft	5	REF		
47097	86.4 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
47098	98.5 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47088	99.8 to 100.8 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
47099	101.8 to 111.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **620 6TH ST** **$25,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091017	6TH ST	634 6TH ST	VINEYARD AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47109	41.1 to 61.2 feet	Key Note Segment		5 ft	101			
47102	41.4 to 42.4 feet	Vertical Change	.54"	5 ft	5	REF		
47103	48.5 to 49.5 feet	Vertical Change	.4"	5 ft	5	REF		
47104	62.0 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47105	66.5 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47106	80.1 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
47110	87.7 to 107.9 feet	Key Note Segment		5 ft	101			
47107	109.0 to 110.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
47108	110.0 to 119.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
47111	116.7 to 118.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **634 6TH ST** **$12,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091027	6TH ST	700 YOSEMITE AVE	VINEYARD AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47151	0.0 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
47112	15.6 to 16.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
47152	18.6 to 22.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
47153	23.4 to 34.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	58	SF	$120	**$6,900**
47154	34.9 to 53.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	92	SF	$120	**$10,980**
47113	42.3 to 58.9 feet	**Vertical Change**	.39"	5 ft	83	REF		
47155	55.6 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
47114	59.7 to 60.7 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
47115	61.4 to 73.9 feet	**Vertical Change**	.45"	5 ft	63	LF	$75	**$4,688**
47156	62.5 to 66.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
47157	68.5 to 81.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
47116	74.8 to 75.8 feet	**Vertical Change**	-.53"	5 ft	5	REF		
47117	76.6 to 77.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
47118	78.3 to 79.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47119	80.2 to 93.1 feet	**Vertical Change**	.34"	5 ft	65	REF		
47158	82.0 to 84.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
47159	85.1 to 86.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
47160	88.8 to 94.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	26	SF	$40	**$1,040**
47120	94.1 to 95.1 feet	**Vertical Change**	-.43"	5 ft	5	REF		
47161	94.8 to 96.6 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	9	SF	$40	**$360**
47162	96.6 to 104.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	40	SF	$40	**$1,600**
47121	97.0 to 99.7 feet	**Vertical Change**	.32"	5 ft	14	REF		
47122	101.3 to 102.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47123	103.5 to 104.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
47163	105.0 to 110.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	28	SF	$40	**$1,100**
47124	107.1 to 120.8 feet	**Vertical Change**	.4"	5 ft	69	REF		
47164	110.9 to 140.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	150	SF	$120	**$17,940**
47125	121.6 to 122.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091027	6TH ST	700 YOSEMITE AVE	VINEYARD AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47126	123.3 to 131.6 feet	Vertical Change	.28"	5 ft	42	REF		
47127	132.5 to 133.5 feet	Vertical Change	1.1"	5 ft	5	REF		
47128	134.2 to 148.6 feet	Vertical Change	.44"	5 ft	72	REF		
47165	140.8 to 144.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
47166	145.1 to 150.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,060**
47167	154.3 to 170.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
47129	155.5 to 165.6 feet	Vertical Change	.27"	5 ft	51	REF		
47130	166.6 to 167.6 feet	Vertical Change	.58"	5 ft	5	REF		
47131	168.8 to 169.8 feet	Vertical Change	.86"	5 ft	5	REF		
47132	170.5 to 171.5 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
47168	171.6 to 182.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	52	SF	$120	**$6,240**
47133	172.2 to 173.2 feet	Vertical Change	-.33"	5 ft	5	REF		
47134	175.0 to 178.3 feet	Vertical Change	.64"	5 ft	17	REF		
47169	182.0 to 192.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,360**
47135	183.3 to 184.3 feet	Vertical Change	-.28"	5 ft	5	REF		
47136	185.3 to 186.3 feet	Vertical Change	.69"	5 ft	5	REF		
47137	187.5 to 188.5 feet	Vertical Change	.32"	5 ft	5	REF		
47138	189.2 to 192.7 feet	Vertical Change	-.26"	5 ft	18	REF		
47170	192.6 to 194.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
47139	193.5 to 201.2 feet	Vertical Change	.43"	5 ft	39	REF		
47171	196.8 to 198.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
47172	198.4 to 204.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,480**
47140	203.2 to 204.2 feet	Vertical Change	-.31"	5 ft	5	REF		
47173	204.8 to 218.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	**$8,400**
47141	204.9 to 212.4 feet	Vertical Change	.43"	5 ft	38	REF		
47142	214.5 to 217.6 feet	Vertical Change	.27"	5 ft	16	REF		
47174	219.2 to 221.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
47175	222.8 to 231.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091027	6TH ST	700 YOSEMITE AVE	VINEYARD AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47176	231.3 to 241.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
47144	234.2 to 235.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47145	242.6 to 243.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
47177	242.6 to 251.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
47178	254.9 to 269.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
47179	269.9 to 274.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
47180	277.0 to 289.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
47181	290.1 to 295.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
47182	296.8 to 302.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
47146	299.1 to 300.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
47147	301.7 to 302.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
47183	305.2 to 307.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
47184	307.9 to 312.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
47185	312.6 to 339.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$16,020**
47148	327.3 to 328.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
47186	339.3 to 345.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
47187	345.6 to 359.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
47149	360.5 to 361.5 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
47188	362.5 to 363.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
47209	365.3 to 382.3 feet	Key Note Segment		5 ft	85			
47189	382.3 to 385.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
47190	386.4 to 404.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
47191	409.3 to 434.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
47192	438.7 to 465.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
47210	465.6 to 487.2 feet	Key Note Segment		5 ft	108			
47193	487.2 to 492.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,140**
47194	496.3 to 499.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
47195	499.8 to 528.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091027	6TH ST	700 YOSEMITE AVE	VINEYARD AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47196	532.1 to 544.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
47197	547.3 to 550.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
47198	552.8 to 555.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
47199	559.8 to 572.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
47200	574.9 to 576.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47211	592.7 to 614.4 feet	Key Note Segment		5 ft	108			
47201	614.4 to 617.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
47202	620.9 to 622.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47203	624.8 to 626.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47204	629.6 to 635.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
47205	637.8 to 647.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
47206	651.6 to 652.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47207	654.9 to 664.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
47208	668.8 to 671.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **700 YOSEMITE AVE** **$293,692.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140811	6TH ST	N I ST	N J ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51736	1.8 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,300**
51737	37.3 to 68.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
51738	71.0 to 72.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
51739	72.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
51740	79.0 to 88.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
51729	79.5 to 80.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
51741	92.9 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51742	96.7 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
51730	98.5 to 99.5 feet	**Vertical Change**	-.73"	5 ft	5	REF		
51743	102.3 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
51731	105.0 to 106.0 feet	**Vertical Change**	.59"	5 ft	5	REF		
51744	109.9 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
51745	118.0 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
51732	123.8 to 124.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
51758	126.3 to 142.5 feet	Key Note Segment		5 ft	81			
51746	143.3 to 144.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
51747	144.5 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
51748	150.2 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
51749	164.3 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
51750	165.8 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
51733	168.5 to 169.5 feet	**Vertical Change**	.93"	5 ft	5	SF	$75	**$375**
51734	175.2 to 176.2 feet	**Vertical Change**	-.87"	5 ft	5	SF	$75	**$375**
51751	177.8 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	187	SF	$120	**$22,440**
51752	217.4 to 218.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
51753	220.8 to 222.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
51754	223.3 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
51755	233.3 to 244.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
51735	239.4 to 240.4 feet	**Vertical Change**	.86"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140811	6TH ST	N I ST	N J ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51756	254.3 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
51757	262.6 to 268.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N I ST** **$110,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140813	6TH ST	N J ST	N K ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51761	2.9 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
51762	6.5 to 12.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
51763	16.5 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
51764	27.6 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
51765	35.1 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
51759	45.5 to 46.5 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
51766	53.4 to 55.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
51767	99.5 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
51781	105.5 to 141.8 feet	Key Note Segment		5 ft	182			
51768	141.9 to 143.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	7	SF	$40	**$280**
51769	145.4 to 148.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
51770	150.4 to 155.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
51771	157.5 to 170.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
51772	174.0 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
51773	180.8 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
51774	186.6 to 188.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
51782	188.6 to 194.6 feet	Key Note Segment		5 ft	30			
51775	196.9 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
51783	200.8 to 208.8 feet	Key Note Segment		5 ft	40			
51776	213.5 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
51760	223.1 to 224.1 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
51777	228.2 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
51778	234.6 to 237.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
51779	237.5 to 238.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
51780	250.1 to 254.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N J ST** **$44,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140806	6TH ST	N J ST	N I ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51727	0.6 to 1.6 feet	Continuous Width	25"	5 ft	5	SF	$120	$600
51705	5.8 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160
51725	17.5 to 18.5 feet	Protruding Object	50"	5 ft	5	JOB	$99	$99
51706	23.0 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
51707	26.9 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,140
51708	43.6 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
51709	49.4 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
51710	66.3 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
51711	70.7 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
51712	76.3 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	$12,600
51713	97.3 to 100.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
51714	104.3 to 105.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
51715	112.6 to 113.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
51724	113.8 to 157.3 feet	Key Note Segment		5 ft	218			
51704	123.0 to 124.0 feet	Vertical Change	-.47"	5 ft	5	REF		
51716	174.3 to 177.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
51717	178.6 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	$11,820
51718	206.5 to 209.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
51719	213.9 to 215.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
51720	221.6 to 226.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
51721	241.0 to 242.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
51722	244.8 to 246.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
51726	247.8 to 248.8 feet	Protruding Object	55"	5 ft	5	JOB	$99	$99
51723	257.3 to 260.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **N J ST** **$62,598.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140816	6TH ST	N K ST	N L ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51784	11.9 to 12.9 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
51785	15.9 to 16.9 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
51801	19.3 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
51802	23.3 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
51803	28.5 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
51824	33.3 to 34.3 feet	Continuous Width	40"	5 ft	5	SF	$120	$600
51786	41.6 to 42.6 feet	Vertical Change	.84"	5 ft	5	SF	$75	$375
51804	54.0 to 60.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
51787	61.4 to 62.4 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
51788	66.6 to 67.6 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
51805	69.0 to 70.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
51789	70.2 to 71.2 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
51790	72.3 to 73.3 feet	Vertical Change	1.83"	5 ft	5	SF	$75	$375
51791	75.6 to 76.6 feet	Vertical Change	.87"	5 ft	5	SF	$75	$375
51806	77.6 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
51807	80.9 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,180
51792	83.5 to 84.5 feet	Vertical Change	.59"	5 ft	5	REF		
51793	91.2 to 92.2 feet	Vertical Change	-.72"	5 ft	5	SF	$75	$375
51808	92.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
51794	115.0 to 116.0 feet	Vertical Change	3.56"	5 ft	5	SF	$75	$375
51821	121.4 to 144.0 feet	Key Note Segment		5 ft	113			
51795	145.6 to 148.9 feet	Vertical Change	.37"	5 ft	17	LF	$75	$1,238
51809	148.5 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
51796	151.9 to 152.9 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
51810	154.4 to 160.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	$3,840
51797	158.6 to 159.6 feet	Vertical Change	.32"	5 ft	5	REF		
51823	162.1 to 163.4 feet		7.0-8.0%	5 ft	7			
51798	162.9 to 163.9 feet	Vertical Change	-.88"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140816	6TH ST	N K ST	N L ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51822	165.3 to 182.5 feet	Key Note Segment		5 ft	86			
51811	182.5 to 183.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$220
51799	184.7 to 185.7 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
51812	187.8 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
51800	189.1 to 190.1 feet	Vertical Change	-.69"	5 ft	5	REF		
51813	197.9 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
51814	216.6 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
51815	250.8 to 255.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
51816	257.8 to 258.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$660
51817	261.6 to 264.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	$1,440
51818	264.0 to 267.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	$2,160
51819	267.6 to 268.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
51820	268.8 to 271.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N K ST** **$44,972.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140803	6TH ST	N K ST	N J ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51682	2.1 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
51683	23.1 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
51684	35.8 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
51685	39.9 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51686	49.3 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
51687	52.8 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
51688	78.2 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
51689	105.5 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
51690	111.9 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
51703	113.1 to 154.8 feet	Key Note Segment		5 ft	209			
51691	154.8 to 157.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
51692	161.8 to 168.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
51681	162.0 to 163.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
51693	171.6 to 173.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
51694	175.8 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
51695	189.8 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
51696	212.3 to 213.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
51697	215.8 to 225.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
51698	227.3 to 229.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
51699	231.7 to 235.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
51700	238.6 to 240.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
51701	242.0 to 249.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
51702	253.6 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **N K ST** **$62,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140844	6TH ST	N L ST	N M ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52116	1.1 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
52117	8.8 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,500**
52118	17.3 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
52119	22.3 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
52120	29.8 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
52121	44.8 to 49.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
52122	53.2 to 60.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
52123	63.3 to 79.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
52124	83.6 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
52125	106.1 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
52126	111.4 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
52135	126.0 to 145.2 feet	Key Note Segment		5 ft	96			
52106	126.9 to 127.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
52107	144.3 to 145.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
52127	147.3 to 150.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,740**
52128	150.5 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
52129	161.2 to 163.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
52130	168.3 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
52131	172.8 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
52132	181.4 to 182.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
52108	200.8 to 201.8 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
52109	211.5 to 212.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
52136	212.8 to 229.0 feet	Key Note Segment		5 ft	81			
52110	226.4 to 227.4 feet	**Vertical Change**	1.9"	5 ft	5	REF		
52111	231.0 to 232.0 feet	**Vertical Change**	1.87"	5 ft	5	REF		
52133	231.0 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
52112	235.5 to 243.3 feet	**Vertical Change**	1.93"	5 ft	39	REF		
52134	237.9 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140844	6TH ST	N L ST	N M ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52113	246.8 to 250.1 feet	Vertical Change	2.03"	5 ft	17	REF		
52114	253.6 to 256.9 feet	Vertical Change	2.1"	5 ft	16	REF		
52115	260.4 to 272.8 feet	Vertical Change	2.04"	5 ft	62	REF		

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N L ST** **$90,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140949	6TH ST	N L ST	N K ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52952	2.3 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
52953	10.0 to 16.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
52954	20.6 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
52946	61.1 to 62.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
52955	74.3 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
52947	81.0 to 82.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
52956	86.9 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
52957	92.4 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
52958	111.5 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
52959	124.0 to 126.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
52971	127.4 to 129.8 feet		6.0-7.0%	5 ft	12			
52972	127.4 to 129.8 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
52948	128.5 to 129.5 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
52960	129.7 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
52961	132.3 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52962	139.2 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
52949	144.7 to 145.7 feet	**Vertical Change**	.7"	5 ft	5	REF		
52963	145.7 to 148.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
52964	151.2 to 199.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	242	SF	$120	**$28,980**
52965	200.6 to 212.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
52966	218.5 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
52970	221.1 to 228.9 feet	Key Note Segment		5 ft	39			
52951	226.3 to 227.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
52967	235.5 to 237.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
52968	237.7 to 261.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
52969	263.6 to 273.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **N L ST** **$92,145.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140851	6TH ST	N M ST	N N ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52241	1.3 to 4.5 feet	Vertical Change	2.98"	5 ft	16	SF	$75	$1,200
52288	5.1 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
52242	5.8 to 13.3 feet	Vertical Change	3.26"	5 ft	38	REF		
52243	14.5 to 15.5 feet	Vertical Change	4.16"	5 ft	5	SF	$75	$375
52244	16.7 to 17.7 feet	Vertical Change	3.03"	5 ft	5	SF	$75	$375
52245	18.9 to 26.7 feet	Vertical Change	3.33"	5 ft	39	SF	$75	$2,925
52246	27.9 to 35.7 feet	Vertical Change	3.62"	5 ft	39	SF	$75	$2,925
52247	37.0 to 44.8 feet	Vertical Change	3.32"	5 ft	39	SF	$75	$2,925
52248	46.0 to 47.0 feet	Vertical Change	3.96"	5 ft	5	SF	$75	$375
52249	48.3 to 58.3 feet	Vertical Change	3.57"	5 ft	50	SF	$75	$3,750
52289	54.6 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
52250	59.6 to 65.2 feet	Vertical Change	3.25"	5 ft	28	REF		
52290	64.6 to 80.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	$9,300
52251	66.4 to 114.5 feet	Vertical Change	3.51"	5 ft	240	REF		
52291	80.3 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
52292	92.8 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
52252	115.7 to 116.7 feet	Vertical Change	4.27"	5 ft	5	REF		
52293	116.3 to 117.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
52253	117.9 to 123.5 feet	Vertical Change	3.41"	5 ft	28	SF	$75	$2,100
52305	119.8 to 144.4 feet	Key Note Segment		5 ft	123			
52254	124.7 to 125.7 feet	Vertical Change	-.33"	5 ft	5	REF		
52255	126.9 to 127.9 feet	Vertical Change	2.8"	5 ft	5	REF		
52256	129.1 to 136.9 feet	Vertical Change	3.45"	5 ft	39	REF		
52257	138.2 to 139.2 feet	Vertical Change	3.72"	5 ft	5	REF		
52258	140.4 to 143.4 feet	Vertical Change	5.99"	5 ft	15	REF		
52259	144.5 to 156.8 feet	Vertical Change	3.34"	5 ft	62	REF		
52294	144.8 to 159.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	$9,000
52260	158.2 to 159.2 feet	Vertical Change	2.2"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140851	6TH ST	N M ST	N N ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52261	160.4 to 163.6 feet	Vertical Change	3.49"	5 ft	16	SF	$75	$1,200
52295	162.2 to 166.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
52262	165.0 to 166.0 feet	Vertical Change	2.56"	5 ft	5	REF		
52263	167.3 to 168.3 feet	Vertical Change	2.25"	5 ft	5	SF	$75	$375
52296	169.2 to 181.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
52264	169.5 to 170.5 feet	Vertical Change	2.55"	5 ft	5	REF		
52265	171.7 to 175.0 feet	Vertical Change	3.32"	5 ft	17	REF		
52266	176.3 to 177.3 feet	Vertical Change	2.58"	5 ft	5	REF		
52267	178.5 to 179.5 feet	Vertical Change	3.03"	5 ft	5	REF		
52268	180.8 to 181.8 feet	Vertical Change	3.39"	5 ft	5	REF		
52297	181.7 to 185.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
52269	183.1 to 184.1 feet	Vertical Change	2.19"	5 ft	5	REF		
52270	185.4 to 188.7 feet	Vertical Change	2.66"	5 ft	17	REF		
52298	185.6 to 194.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,220
52271	189.9 to 190.9 feet	Vertical Change	2.94"	5 ft	5	REF		
52272	192.1 to 193.1 feet	Vertical Change	3.47"	5 ft	5	REF		
52273	194.5 to 202.2 feet	Vertical Change	2.31"	5 ft	39	SF	$75	$2,888
52299	198.6 to 202.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
52274	203.4 to 204.4 feet	Vertical Change	3.46"	5 ft	5	REF		
52300	203.7 to 204.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
52275	205.8 to 206.8 feet	Vertical Change	2.58"	5 ft	5	SF	$75	$375
52276	208.0 to 211.2 feet	Vertical Change	3.49"	5 ft	16	SF	$75	$1,200
52277	212.6 to 213.6 feet	Vertical Change	2.43"	5 ft	5	SF	$75	$375
52278	214.8 to 215.8 feet	Vertical Change	3.42"	5 ft	5	SF	$75	$375
52279	216.5 to 217.5 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
52280	219.4 to 222.6 feet	Vertical Change	2.34"	5 ft	16	SF	$75	$1,200
52301	223.0 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
52281	223.8 to 224.8 feet	Vertical Change	3.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140851	6TH ST	N M ST	N N ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52302	225.8 to 232.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
52282	226.1 to 227.1 feet	**Vertical Change**	2.28"	5 ft	5	REF		
52283	228.3 to 240.7 feet	**Vertical Change**	3.42"	5 ft	62	REF		
52284	242.0 to 243.0 feet	**Vertical Change**	2.93"	5 ft	5	SF	$75	**$375**
52285	244.2 to 267.6 feet	**Vertical Change**	3.41"	5 ft	117	SF	$75	**$8,775**
52306	245.3 to 246.8 feet		5.0-6.0%	5 ft	8			
52303	255.3 to 261.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
52304	267.7 to 272.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
52286	268.9 to 269.9 feet	**Vertical Change**	3.08"	5 ft	5	REF		
52287	271.1 to 272.1 feet	**Vertical Change**	3.5"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N M ST** **$98,962.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140919	6TH ST	N N ST	N O ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52655	11.8 to 12.8 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
52656	42.5 to 43.5 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
52657	55.5 to 56.5 feet	Vertical Change	-.6"	5 ft	5	SF	$75	$375
52665	59.7 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
52658	64.0 to 65.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
52666	67.6 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
52667	71.5 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	$20,520
52659	76.1 to 77.1 feet	Vertical Change	.26"	5 ft	5	REF		
52668	110.3 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
52660	114.0 to 115.0 feet	Vertical Change	.9"	5 ft	5	REF		
52669	122.9 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
52675	126.3 to 145.3 feet	Key Note Segment		5 ft	95			
52661	145.4 to 146.4 feet	Vertical Change	.47"	5 ft	5	REF		
52676	148.8 to 157.8 feet	Key Note Segment		5 ft	45			
52670	157.8 to 172.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	72	SF	$40	$2,900
52671	173.2 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	$9,240
52662	186.3 to 187.3 feet	Vertical Change	.31"	5 ft	5	REF		
52672	189.8 to 198.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
52673	210.7 to 214.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
52677	219.2 to 229.8 feet	Key Note Segment		5 ft	53			
52674	230.3 to 256.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	130	SF	$40	$5,180
52663	232.2 to 233.2 feet	Vertical Change	-.4"	5 ft	5	REF		
52664	264.6 to 265.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N N ST** **$56,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140947	6TH ST	N N ST	N M ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52902	0.0 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
52878	7.2 to 8.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
52903	24.3 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
52904	38.8 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
52879	41.6 to 42.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
52905	54.9 to 70.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
52906	75.3 to 93.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
52880	93.2 to 94.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
52907	97.1 to 115.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
52881	110.5 to 111.5 feet	**Vertical Change**	-.42"	5 ft	5	REF		
52908	116.8 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
52909	158.6 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
52882	166.5 to 167.5 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
52910	191.5 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
52883	218.0 to 219.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
52911	235.3 to 236.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
52912	239.2 to 242.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
52913	243.4 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
52884	245.3 to 246.3 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
52914	248.2 to 249.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
52915	252.4 to 253.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
52944	253.1 to 254.1 feet		5.0-6.0%	5 ft	5			
52885	255.1 to 256.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
52916	256.5 to 257.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
52886	259.2 to 260.2 feet	**Vertical Change**	-.67"	5 ft	5	REF		
52917	260.0 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
52887	263.1 to 264.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
52918	277.5 to 279.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140947	6TH ST	N N ST	N M ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52919	280.3 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
52920	292.4 to 295.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
52888	294.1 to 295.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
52921	308.2 to 310.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
52922	319.8 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
52889	320.5 to 321.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
52923	339.8 to 349.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
52890	347.6 to 348.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
52924	349.6 to 360.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
52891	357.6 to 358.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
52925	370.1 to 376.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
52892	377.8 to 378.8 feet	**Vertical Change**	-.59"	5 ft	5	SF	$75	**$375**
52926	379.6 to 384.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
52927	385.3 to 397.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
52928	402.3 to 447.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	224	SF	$120	**$26,820**
52893	442.3 to 443.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
52929	450.3 to 452.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
52930	452.6 to 461.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
52931	463.7 to 471.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
52932	473.6 to 480.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
52933	480.0 to 498.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
52894	480.6 to 481.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
52895	484.9 to 485.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
52896	500.5 to 501.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
52934	501.6 to 519.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
52897	517.6 to 518.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
52935	522.7 to 523.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
52936	524.5 to 540.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140947	6TH ST	N N ST	N M ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52937	542.8 to 547.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
52938	549.9 to 553.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
52939	553.4 to 576.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
52899	580.1 to 581.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
52943	582.1 to 593.2 feet	Key Note Segment		5 ft	56			
52900	584.8 to 585.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
52901	602.9 to 603.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
52940	603.3 to 604.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
52941	608.3 to 614.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
52942	616.0 to 619.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
52945	618.3 to 619.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **N N ST** **$247,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140926	6TH ST	N O ST	1009 6TH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52738	0.0 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
52739	20.9 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
52740	25.5 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
52741	41.3 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
52742	82.0 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
52737	91.0 to 92.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
52743	94.7 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **N O ST** **$38,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140944	6TH ST	N O ST	N N ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52863	9.8 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
52849	15.7 to 16.7 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
52864	21.3 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
52850	37.2 to 38.2 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
52851	76.2 to 77.2 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
52852	80.0 to 81.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
52853	95.2 to 96.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
52854	100.7 to 101.7 feet	**Vertical Change**	2.82"	5 ft	5	SF	$75	**$375**
52877	120.8 to 145.6 feet	Key Note Segment		5 ft	124			
52855	123.0 to 124.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
52856	138.3 to 139.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
52857	140.2 to 141.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
52858	144.8 to 145.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
52865	148.4 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
52859	161.8 to 162.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
52866	166.1 to 167.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
52867	171.5 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
52868	174.2 to 176.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
52869	179.6 to 180.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
52870	181.3 to 183.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
52860	183.6 to 184.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
52871	186.3 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
52872	198.6 to 220.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
52861	218.1 to 219.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
52873	225.3 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
52874	227.8 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
52875	236.5 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
52876	241.1 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140944	6TH ST	N O ST	N N ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52862	266.9 to 267.9 feet	Vertical Change	.53"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **N O ST** **$61,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081523	6TH ST	RAILROAD TRACKS	S E ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46308	8.2 to 9.2 feet	Vertical Change	-.27"	5 ft	5	REF		
46310	8.5 to 10.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
46311	10.5 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
46312	15.2 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
46313	19.5 to 22.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
46318	23.0 to 47.4 feet	Key Note Segment		5 ft	122			
46314	48.0 to 60.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
46315	62.1 to 72.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
46316	72.1 to 73.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
46317	73.7 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
46309	79.8 to 80.8 feet	Vertical Change	.29"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **RAILROAD TRACKS** **$22,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091048	6TH ST	S A ST	S B ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47313	0.6 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,620**
47310	8.6 to 9.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
47314	43.4 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
47311	51.8 to 52.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47315	65.8 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
47316	91.6 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,640**
47329	126.0 to 145.4 feet	Key Note Segment		5 ft	97			
47317	145.4 to 147.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
47330	147.8 to 164.0 feet	Key Note Segment		5 ft	81			
47318	164.1 to 165.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
47319	165.8 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
47320	211.8 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
47321	218.8 to 220.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
47322	221.0 to 222.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
47323	224.7 to 226.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
47324	228.2 to 229.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
47325	229.4 to 230.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47326	239.1 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
47327	251.5 to 252.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47312	252.7 to 253.7 feet	**Vertical Change**	.5"	5 ft	5	REF		
47328	259.9 to 274.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S A ST** **$92,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091007	6TH ST	S A ST	510 6TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47043	0.0 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
47044	5.5 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
47035	20.4 to 21.4 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
47045	23.7 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
47046	31.4 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
47047	35.7 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47036	37.5 to 38.5 feet	**Vertical Change**	1.26"	5 ft	5	REF		
47037	45.2 to 46.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
47048	48.3 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
47038	54.8 to 55.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
47039	58.7 to 59.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
47049	60.4 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
47040	71.9 to 72.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
47041	89.1 to 90.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
47050	89.4 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
47051	100.7 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
47042	106.4 to 107.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
47052	117.8 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S A ST** **$41,145.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091052	6TH ST	S B ST	S C ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47339	6.1 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47331	9.7 to 10.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
47332	13.2 to 14.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
47340	15.6 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47333	15.9 to 16.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
47341	48.8 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
47334	51.1 to 52.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
47335	53.2 to 54.2 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
47342	60.6 to 61.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47336	63.3 to 64.3 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
47343	80.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
47344	113.7 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
47359	127.0 to 148.4 feet	Key Note Segment		5 ft	107			
47337	139.2 to 140.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
47338	146.8 to 147.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
47345	158.9 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
47346	177.0 to 184.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
47347	189.7 to 193.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
47348	193.8 to 200.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
47349	200.0 to 201.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
47350	204.6 to 220.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
47351	223.2 to 224.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
47352	224.2 to 226.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
47353	229.3 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
47354	240.6 to 248.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
47355	252.3 to 254.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
47356	259.6 to 260.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
47357	265.7 to 269.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091052	6TH ST	S B ST	S C ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47358	269.6 to 271.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S B ST** **$71,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091004	6TH ST	S B ST	S A ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47017	0.0 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
47018	19.3 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
47013	22.9 to 23.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
47019	39.3 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
47020	44.5 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
47021	65.2 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
47014	68.0 to 69.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47022	92.8 to 98.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
47023	101.6 to 108.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
47024	110.8 to 125.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
47033	126.0 to 142.0 feet	Key Note Segment		5 ft	80			
47015	131.1 to 132.1 feet	**Vertical Change**	.54"	5 ft	5	REF		
47034	143.6 to 153.0 feet	Key Note Segment		5 ft	47			
47025	153.8 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
47026	162.3 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
47027	168.9 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
47028	177.6 to 222.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	222	SF	$120	**$26,640**
47029	222.8 to 224.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
47030	225.5 to 240.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
47031	256.0 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
47032	261.6 to 268.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
47016	266.9 to 267.9 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S B ST** **$109,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091055	6TH ST	S C ST	S D ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47362	0.6 to 1.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$990**
47363	6.8 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	11	SF	$120	**$1,350**
47360	13.0 to 14.0 feet	**Vertical Change**	-.35"	8 ft	8	LF	$75	**$563**
47364	15.2 to 19.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	33	SF	$120	**$3,960**
47365	20.8 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	123	SF	$120	**$14,760**
47366	48.5 to 61.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	98	SF	$120	**$11,700**
47367	61.5 to 68.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	52	SF	$120	**$6,210**
47368	68.9 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,170**
47369	71.3 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$900**
47370	79.7 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	75	SF	$120	**$9,000**
47371	90.4 to 95.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	41	SF	$120	**$4,860**
47372	98.3 to 100.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	**$1,710**
47387	100.8 to 112.8 feet	Key Note Segment		8 ft	90			
47373	115.5 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$900**
47388	129.7 to 144.2 feet	Key Note Segment		8 ft	109			
47374	145.6 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	93	SF	$120	**$11,160**
47361	146.6 to 147.6 feet	**Vertical Change**	.55"	8 ft	8	REF		
47375	169.6 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	69	SF	$120	**$8,280**
47376	179.3 to 189.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	80	SF	$120	**$9,540**
47377	193.3 to 201.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	65	SF	$120	**$7,740**
47378	201.9 to 204.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,890**
47379	206.7 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$990**
47380	210.2 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,620**
47381	212.8 to 217.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	35	SF	$120	**$4,140**
47382	222.2 to 223.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	8	SF	$120	**$990**
47383	225.5 to 231.2 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	43	SF	$120	**$5,130**
47384	231.2 to 253.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	164	SF	$120	**$19,620**
47385	253.5 to 256.0 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	19	SF	$120	**$2,250**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091055	6TH ST	S C ST	S D ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47386	262.7 to 263.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$900**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S C ST** **$132,322.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091001	6TH ST	S C ST	S B ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46987	0.0 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
46984	4.6 to 5.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
46988	7.2 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
46989	14.3 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
46990	22.2 to 29.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
46991	30.7 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
47009	55.4 to 75.2 feet	Key Note Segment		5 ft	99			
46992	75.8 to 78.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
46993	78.9 to 85.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
47010	87.2 to 107.1 feet	Key Note Segment		5 ft	100			
46985	92.2 to 93.2 feet	**Vertical Change**	.99"	5 ft	5	REF		
46994	110.0 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
46995	132.0 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
46996	141.1 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
47011	145.9 to 148.2 feet		7.0-8.0%	5 ft	11			
47012	148.2 to 149.2 feet		5.0-6.0%	5 ft	5			
46997	156.3 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
46998	159.7 to 160.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46999	160.9 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47000	167.2 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$20,040**
47001	203.1 to 206.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
47002	207.3 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
47003	212.6 to 213.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
46986	212.9 to 213.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
47004	216.9 to 228.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
47005	231.1 to 250.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
47006	252.8 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
47007	264.7 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091001	6TH ST	S C ST	S B ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47008	271.4 to 272.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S C ST** **$99,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091105	6TH ST	S D ST	S E ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47465	1.2 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$990**
47466	5.1 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	152	SF	$120	**$18,180**
47467	25.3 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,060**
47468	28.7 to 37.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	68	SF	$120	**$8,190**
47469	37.8 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,350**
47470	42.5 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	257	SF	$120	**$30,870**
47471	80.2 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	81	SF	$120	**$9,720**
47472	93.3 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	56	SF	$120	**$6,750**
47473	101.8 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	202	SF	$120	**$24,210**
47484	128.7 to 147.0 feet	Key Note Segment		8 ft	137			
47461	129.6 to 130.6 feet	**Vertical Change**	.26"	8 ft	8	REF		
47462	145.8 to 146.8 feet	**Vertical Change**	-.43"	8 ft	8	REF		
47474	147.1 to 148.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	8 ft	9	SF	$40	**$360**
47475	150.6 to 152.2 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	12	SF	$120	**$1,440**
47476	152.6 to 155.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	20	SF	$120	**$2,430**
47477	155.3 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,300**
47478	166.5 to 174.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	62	SF	$120	**$7,380**
47479	176.8 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,970**
47463	179.9 to 180.9 feet	**Vertical Change**	.28"	8 ft	8	REF		
47480	180.9 to 202.0 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	158	SF	$120	**$18,990**
47464	182.0 to 183.0 feet	**Vertical Change**	-.39"	8 ft	8	REF		
47485	203.9 to 221.6 feet	Key Note Segment		8 ft	133			
47481	222.9 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	321	SF	$120	**$38,520**
47482	270.3 to 272.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	**$1,620**
47483	272.1 to 274.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	19	SF	$120	**$2,250**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S D ST** **$185,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106090957	6TH ST	S D ST	S C ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46968	0.0 to 23.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	138	SF	$120	**$16,560**
46969	23.0 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,416**
46970	37.4 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	140	SF	$120	**$16,848**
46971	64.2 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
46972	70.6 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	61	SF	$120	**$7,344**
46980	80.8 to 102.2 feet	Key Note Segment		6 ft	128			
46964	81.7 to 82.7 feet	**Vertical Change**	-.33"	6 ft	6	REF		
46973	103.1 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	66	SF	$120	**$7,920**
46974	114.1 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	19	SF	$120	**$2,304**
46981	117.3 to 137.6 feet	Key Note Segment		6 ft	122			
46975	137.7 to 145.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	47	SF	$40	**$1,896**
46965	144.3 to 147.9 feet	**Vertical Change**	.45"	6 ft	22	REF		
46976	148.0 to 190.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	254	SF	$120	**$30,456**
46966	149.4 to 150.4 feet	**Vertical Change**	-.85"	6 ft	6	REF		
46967	189.0 to 190.0 feet	**Vertical Change**	.41"	6 ft	6	REF		
46982	191.4 to 214.8 feet	Key Note Segment		6 ft	140			
46977	219.1 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	67	SF	$120	**$8,064**
46978	230.8 to 233.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	15	SF	$120	**$1,800**
46983	233.5 to 257.6 feet	Key Note Segment		6 ft	145			
46979	257.7 to 258.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	7	SF	$40	**$264**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S D ST** **$102,672.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081608	6TH ST	S E ST	S GATEWAY DR	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46515	0.5 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	11	SF	$120	**$1,296**
46516	5.4 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$1,008**
46517	11.1 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
46518	17.8 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
46519	26.3 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,664**
46520	31.5 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	25	SF	$120	**$3,024**
46521	35.7 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	66	SF	$120	**$7,920**
46529	48.0 to 62.7 feet	Key Note Segment		6 ft	88			
46530	62.8 to 99.7 feet	Key Note Segment		6 ft	221			
46510	77.7 to 78.7 feet	**Vertical Change**	-.73"	6 ft	6	REF		
46511	84.5 to 85.5 feet	**Vertical Change**	1.42"	6 ft	6	REF		
46512	99.3 to 100.3 feet	**Vertical Change**	-.3"	6 ft	6	REF		
46531	103.7 to 123.0 feet	Key Note Segment		6 ft	116			
46522	133.7 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
46532	136.2 to 160.6 feet	Key Note Segment		6 ft	146			
46523	165.3 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
46524	168.8 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
46525	180.1 to 181.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
46526	184.7 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	31	SF	$120	**$3,672**
46527	189.8 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	54	SF	$120	**$6,480**
46513	210.4 to 211.4 feet	**Vertical Change**	-.28"	6 ft	6	LF	$75	**$450**
46533	215.3 to 248.8 feet	Key Note Segment		6 ft	201			
46528	248.8 to 252.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	21	SF	$40	**$840**
46514	249.8 to 250.8 feet	**Vertical Change**	.27"	6 ft	6	REF		

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S E ST** **$40,818.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091111	6TH ST	S E ST	S D ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47501	0.2 to 10.3 feet	Key Note Segment		9 ft	91			
47489	11.3 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	78	SF	$120	**$9,396**
47490	22.3 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	42	SF	$120	**$5,076**
47491	39.3 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,188**
47492	48.1 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	128	SF	$120	**$15,336**
47486	60.6 to 61.6 feet	**Vertical Change**	.48"	9 ft	9	REF		
47493	68.0 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	184	SF	$120	**$22,032**
47487	69.5 to 70.5 feet	**Vertical Change**	.38"	9 ft	9	REF		
47494	91.5 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	57	SF	$120	**$6,804**
47495	101.1 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	123	SF	$120	**$14,796**
47502	114.9 to 139.2 feet	Key Note Segment		9 ft	219			
47496	140.3 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	218	SF	$120	**$26,136**
47497	166.3 to 173.7 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	67	SF	$120	**$7,992**
47503	175.9 to 205.4 feet	Key Note Segment		9 ft	266			
47488	176.4 to 177.4 feet	**Vertical Change**	-.3"	9 ft	9	REF		
47498	208.9 to 235.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	239	SF	$120	**$28,728**
47499	239.5 to 249.9 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	94	SF	$120	**$11,232**
47500	250.3 to 254.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	38	SF	$120	**$4,536**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S E ST** **$153,252.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081521	6TH ST	S GATEWAY DR	RAILROAD TRACKS	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46297	1.3 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
46298	6.0 to 13.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
46299	22.9 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
46300	27.1 to 33.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
46301	35.8 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
46302	39.4 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
46303	45.3 to 49.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
46307	49.8 to 84.9 feet	Key Note Segment		5 ft	176			
46304	89.8 to 93.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
46305	93.3 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46306	100.2 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S GATEWAY DR** **$23,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091045	6TH ST	S LAKE ST	S A ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47287	0.9 to 3.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
47288	3.4 to 6.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
47289	6.8 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
47290	11.2 to 12.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
47291	15.7 to 24.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
47292	41.8 to 43.3 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	8	SF	$120	**$900**
47279	52.1 to 53.1 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
47280	54.2 to 55.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
47293	57.5 to 63.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
47308	64.1 to 72.4 feet	Key Note Segment		5 ft	42			
47294	72.4 to 84.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	59	SF	$40	**$2,360**
47295	86.5 to 95.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
47281	93.6 to 94.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
47296	97.4 to 101.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
47297	103.3 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47298	104.6 to 115.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
47309	117.0 to 137.1 feet	Key Note Segment		5 ft	101			
47282	136.2 to 137.2 feet	**Vertical Change**	.62"	5 ft	5	REF		
47299	139.8 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
47283	145.7 to 146.7 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
47284	153.7 to 154.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47300	154.3 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
47301	161.2 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
47285	170.9 to 171.9 feet	**Vertical Change**	-.66"	5 ft	5	REF		
47286	190.6 to 191.6 feet	**Vertical Change**	-.42"	5 ft	5	REF		
47302	190.6 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
47303	205.4 to 237.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,020**
47304	237.8 to 241.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091045	6TH ST	S LAKE ST	S A ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47305	241.6 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47306	249.7 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
47307	255.4 to 258.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: NW *side of* **6TH ST** *Starting at:* **S LAKE ST** **$91,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091012	6TH ST	S LAKE ST	612 6TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47074	0.5 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
47075	22.4 to 46.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,580**
47076	46.8 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47072	53.7 to 54.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
47077	57.3 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
47073	60.7 to 61.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
47078	75.7 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
47081	92.1 to 102.7 feet	Key Note Segment		5 ft	53			
47079	103.1 to 107.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
47080	107.8 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S LAKE ST** **$53,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140931	6TH ST	S P ST	S O ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52764	1.5 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
52765	6.4 to 27.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
52766	29.0 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
52767	47.7 to 48.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
52768	51.0 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
52769	58.8 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
52753	65.7 to 66.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
52770	74.9 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
52771	82.4 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
52772	85.2 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
52773	89.0 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
52774	104.8 to 112.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
52754	113.3 to 114.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
52775	116.8 to 118.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52776	124.9 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
52755	128.4 to 129.4 feet	**Vertical Change**	-.47"	5 ft	5	REF		
52756	133.0 to 134.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
52777	135.0 to 136.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
52757	135.5 to 136.5 feet	**Vertical Change**	3.61"	5 ft	5	REF		
52758	141.7 to 144.8 feet	**Vertical Change**	.39"	5 ft	16	LF	$75	**$1,163**
52778	146.3 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
52779	154.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
52759	156.2 to 157.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
52760	160.5 to 161.5 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
52780	168.0 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
52789	176.9 to 191.6 feet	Key Note Segment		5 ft	74			
52761	179.9 to 180.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
52781	191.6 to 192.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140931	6TH ST	S P ST	S O ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52782	192.8 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
52762	200.9 to 201.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
52783	208.9 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
52784	224.2 to 231.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
52785	234.0 to 247.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
52786	250.2 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
52787	254.8 to 272.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,680**
52788	273.0 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **S P ST** **$93,577.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091037	6TH ST	VINEYARD AVE	635 6TH ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47254	2.8 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
47255	22.7 to 24.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
47256	25.0 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
47257	29.0 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
47258	32.3 to 68.9 feet	Key Note Segment		5 ft	183			

TOTAL COST FOR: SE *side of* **6TH ST** *Starting at:* **VINEYARD AVE** **$15,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130720	7TH ST	225 N J ST	N J ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50832	0.5 to 11.8 feet	Key Note Segment		5 ft	57			
50828	23.5 to 24.5 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
50829	65.9 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,320
50830	84.1 to 88.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,580
50831	89.4 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,440

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **225 N J ST** **$20,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130730	7TH ST	300 S J ST	S J ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50904	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
50916	1.2 to 2.2 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
50905	4.8 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
50906	11.2 to 18.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
50907	21.3 to 25.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
50900	24.3 to 25.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
50908	25.5 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
50909	40.8 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
50901	41.1 to 42.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
50902	52.0 to 53.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50910	56.6 to 59.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
50903	60.0 to 61.0 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
50911	62.6 to 67.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
50912	71.8 to 73.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
50913	76.5 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
50914	83.9 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
50915	88.6 to 89.9 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **300 S J ST** **$42,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081540	7TH ST	308 S D ST	S D ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46401	0.5 to 7.2 feet	Cross Slope (PAR)	14.0-15.0%	5 ft	34	SF	$120	**$4,020**
46405	8.7 to 10.3 feet		5.0-6.0%	5 ft	8			
46402	12.7 to 22.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	51	SF	$120	**$6,060**
46404	24.2 to 56.0 feet	Key Note Segment		5 ft	159			
46403	57.3 to 66.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **308 S D ST** **$15,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130715	7TH ST	N I ST	N K ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50808	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
50809	3.0 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
50806	16.3 to 17.3 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
50810	24.8 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50811	33.6 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
50812	46.8 to 48.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50813	50.8 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
50814	56.7 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
50807	62.4 to 63.4 feet	**Vertical Change**	-.45"	5 ft	5	REF		
50815	79.8 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
50816	91.9 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
50817	114.8 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N I ST** **$42,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130718	7TH ST	N I ST	224 1/2 N I ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50819	11.5 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50820	16.3 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50818	30.5 to 31.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50821	41.1 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
50822	51.1 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
50823	64.3 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
50824	70.0 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
50825	90.8 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
50827	108.9 to 121.4 feet	Key Note Segment		5 ft	63			
50826	122.0 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N I ST** **$31,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130722	7TH ST	N J ST	N K ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50838	0.0 to 2.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
50839	6.0 to 44.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	192	SF	$40	$7,660
50833	16.6 to 17.6 feet	Vertical Change	-.47"	5 ft	5	REF		
50834	29.6 to 30.6 feet	Vertical Change	.33"	5 ft	5	REF		
50840	48.0 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
50841	59.5 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
50842	63.4 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,620
50856	77.4 to 99.7 feet	Key Note Segment		5 ft	111			
50843	101.5 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
50844	115.9 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,780
50857	122.2 to 140.8 feet	Key Note Segment		5 ft	93			
50845	140.8 to 145.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	$1,000
50858	146.2 to 152.6 feet	Key Note Segment		5 ft	32			
50846	152.6 to 156.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	22	SF	$40	$860
50847	157.1 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
50848	165.8 to 170.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	26	SF	$120	$3,060
50849	183.8 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
50835	184.1 to 185.1 feet	Vertical Change	-.35"	5 ft	5	REF		
50850	191.7 to 205.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
50836	194.7 to 195.7 feet	Vertical Change	-.32"	5 ft	5	REF		
50851	208.6 to 219.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	$6,600
50852	219.6 to 225.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
50837	227.1 to 228.1 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
50853	238.7 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
50854	244.3 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
50855	260.0 to 267.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N J ST** **$73,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130733	7TH ST	N J ST	N I ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50925	0.1 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
50926	6.3 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
50927	16.6 to 18.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,140**
50917	23.1 to 24.1 feet	**Vertical Change**	-1.33"	5 ft	5	SF	$75	**$375**
50928	25.8 to 28.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	13	SF	$120	**$1,500**
50918	29.1 to 30.1 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
50919	34.3 to 35.3 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
50929	37.5 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
50930	50.6 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
50931	74.8 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
50932	79.3 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
50933	85.9 to 91.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
50934	92.1 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
50946	106.5 to 153.9 feet	Key Note Segment		5 ft	237			
50920	120.1 to 121.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
50921	124.6 to 125.6 feet	**Vertical Change**	.99"	5 ft	5	REF		
50922	135.0 to 138.1 feet	**Vertical Change**	.46"	5 ft	16	REF		
50935	153.9 to 168.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	75	SF	$40	**$2,980**
50936	169.0 to 171.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
50937	172.9 to 179.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,080**
50938	181.2 to 196.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
50939	196.8 to 202.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
50923	201.8 to 202.8 feet	**Vertical Change**	-.69"	5 ft	5	REF		
50940	202.0 to 203.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
50941	203.6 to 205.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
50942	225.4 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
50943	232.4 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
50944	236.8 to 241.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130733	7TH ST	N J ST	N I ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50945	241.8 to 263.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **N J ST** **$78,025.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130712	7TH ST	N K ST	N L ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50797	0.8 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
50798	13.6 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
50799	28.4 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
50791	34.7 to 35.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
50792	42.0 to 43.0 feet	**Vertical Change**	-1.4"	5 ft	5	SF	$75	**$375**
50800	49.1 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
50793	54.9 to 55.9 feet	**Vertical Change**	1.06"	5 ft	5	REF		
50801	60.1 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
50794	63.3 to 64.3 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
50795	69.2 to 70.2 feet	**Vertical Change**	.58"	5 ft	5	REF		
50802	69.9 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
50803	84.6 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
50796	85.0 to 86.0 feet	**Vertical Change**	.47"	5 ft	5	REF		
50804	106.6 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50805	116.4 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N K ST** **$31,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130724	7TH ST	N K ST	N L ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50859	1.6 to 2.6 feet	Vertical Change	-.71"	5 ft	5	SF	$75	$375
50870	17.2 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
50860	18.8 to 19.8 feet	Vertical Change	-.27"	5 ft	5	REF		
50871	29.7 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,260
50872	57.1 to 58.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
50873	59.6 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
50861	61.6 to 62.6 feet	Vertical Change	-.26"	5 ft	5	REF		
50882	66.3 to 80.9 feet	Key Note Segment		5 ft	73			
50862	74.4 to 75.4 feet	Vertical Change	.28"	5 ft	5	REF		
50863	117.3 to 118.3 feet	Vertical Change	-.39"	5 ft	5	LF	$75	$375
50883	122.9 to 144.2 feet	Key Note Segment		5 ft	106			
50864	124.2 to 125.2 feet	Vertical Change	.51"	5 ft	5	REF		
50885	144.2 to 145.3 feet		6.0-7.0%	5 ft	6			
50865	149.7 to 150.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
50874	160.1 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
50866	173.4 to 174.4 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
50884	177.9 to 192.5 feet	Key Note Segment		5 ft	73			
50875	192.5 to 198.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	31	SF	$40	$1,240
50867	199.1 to 200.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
50876	201.3 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
50877	208.3 to 215.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
50878	216.0 to 227.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,080
50879	229.0 to 230.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
50868	229.2 to 230.2 feet	Vertical Change	-.33"	5 ft	5	REF		
50869	235.6 to 236.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
50880	236.9 to 249.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	$7,740
50881	250.3 to 264.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,280

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N K ST** **$49,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130727	7TH ST	N L ST	612 7TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50899	0.0 to 1.1 feet		5.0-6.0%	5 ft	6			
50894	0.8 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
50886	20.1 to 21.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
50895	24.1 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50896	29.5 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
50887	50.6 to 53.5 feet	**Vertical Change**	.61"	5 ft	15	SF	$75	**$1,088**
50888	57.2 to 58.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
50897	76.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
50890	84.7 to 85.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
50891	106.2 to 107.2 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
50892	118.5 to 119.5 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
50898	125.8 to 142.8 feet	Key Note Segment		5 ft	85			
50893	130.1 to 131.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **N L ST** **$20,542.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140903	7TH ST	N N ST	N O ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52493	0.1 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
52494	13.3 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
52466	17.9 to 18.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
52495	22.2 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
52467	28.8 to 32.1 feet	**Vertical Change**	3.5"	5 ft	17	REF		
52468	35.6 to 41.2 feet	**Vertical Change**	3.44"	5 ft	28	REF		
52496	46.2 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
52469	60.5 to 61.5 feet	**Vertical Change**	-.46"	5 ft	5	REF		
52509	66.0 to 75.8 feet	Key Note Segment		5 ft	49			
52497	75.8 to 80.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	23	SF	$40	**$920**
52498	82.2 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
52470	85.4 to 113.6 feet	**Vertical Change**	3.5"	5 ft	141	REF		
52499	103.9 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
52471	117.2 to 118.2 feet	**Vertical Change**	3.41"	5 ft	5	SF	$75	**$375**
52500	120.3 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
52510	124.5 to 143.3 feet	Key Note Segment		5 ft	94			
52472	124.7 to 125.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
52473	135.3 to 136.3 feet	**Vertical Change**	3.45"	5 ft	5	REF		
52474	139.8 to 140.8 feet	**Vertical Change**	3.49"	5 ft	5	REF		
52475	141.8 to 142.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
52476	144.1 to 145.1 feet	**Vertical Change**	2.81"	5 ft	5	REF		
52501	145.0 to 150.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
52477	150.6 to 151.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
52502	150.8 to 152.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
52503	154.9 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
52478	155.5 to 163.3 feet	**Vertical Change**	3.45"	5 ft	39	REF		
52479	166.8 to 185.9 feet	**Vertical Change**	3.5"	5 ft	96	REF		
52504	187.0 to 188.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140903	7TH ST	N N ST	N O ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52511	188.8 to 197.6 feet	Key Note Segment		5 ft	44			
52505	197.6 to 205.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	$1,640
52480	206.5 to 207.5 feet	Vertical Change	-.63"	5 ft	5	SF	$75	$375
52481	209.7 to 217.5 feet	Vertical Change	3.49"	5 ft	39	SF	$75	$2,925
52482	221.0 to 224.3 feet	Vertical Change	3.41"	5 ft	17	SF	$75	$1,238
52506	222.3 to 224.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
52483	228.4 to 229.4 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
52484	232.3 to 233.3 feet	Vertical Change	3.56"	5 ft	5	SF	$75	$375
52485	234.3 to 235.3 feet	Vertical Change	1.75"	5 ft	5	SF	$75	$375
52507	236.4 to 257.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,720
52486	236.8 to 237.8 feet	Vertical Change	3.48"	5 ft	5	REF		
52487	241.4 to 242.4 feet	Vertical Change	3.54"	5 ft	5	REF		
52488	245.9 to 249.2 feet	Vertical Change	3.48"	5 ft	17	REF		
52489	250.4 to 251.4 feet	Vertical Change	4.03"	5 ft	5	REF		
52490	252.5 to 253.5 feet	Vertical Change	3.43"	5 ft	5	REF		
52491	259.3 to 260.3 feet	Vertical Change	3.45"	5 ft	5	REF		
52508	259.8 to 268.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	$4,920
52492	261.6 to 262.6 feet	Vertical Change	.36"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **N N ST** **$86,252.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140906	7TH ST	N O ST	N N ST	130

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52559	0.0 to 1.1 feet		7.0-8.0%	5 ft	6			
52512	1.2 to 15.8 feet	Vertical Change	3.34"	5 ft	73	SF	$75	$5,475
52534	2.8 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
52535	9.6 to 12.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,440
52536	13.3 to 17.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	$2,700
52513	16.5 to 17.5 feet	Vertical Change	-.37"	5 ft	5	REF		
52537	17.8 to 25.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	$4,680
52514	19.2 to 36.1 feet	Vertical Change	3.4"	5 ft	85	REF		
52538	25.8 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,380
52539	35.9 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
52515	37.3 to 38.3 feet	Vertical Change	4.14"	5 ft	5	REF		
52540	39.4 to 62.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	$13,620
52516	44.1 to 45.1 feet	Vertical Change	3.46"	5 ft	5	REF		
52541	62.3 to 64.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	$1,260
52555	64.4 to 78.8 feet	Key Note Segment		5 ft	72			
52542	78.8 to 81.1 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	11	SF	$40	$460
52517	80.5 to 81.5 feet	Vertical Change	-.29"	5 ft	5	REF		
52543	81.7 to 84.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	$1,860
52556	85.8 to 102.3 feet	Key Note Segment		5 ft	83			
52518	87.5 to 88.5 feet	Vertical Change	.61"	5 ft	5	REF		
52519	107.3 to 108.3 feet	Vertical Change	3.57"	5 ft	5	SF	$75	$375
52544	111.3 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
52545	120.8 to 123.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
52520	123.0 to 126.3 feet	Vertical Change	3.71"	5 ft	17	REF		
52557	127.8 to 146.9 feet	Key Note Segment		5 ft	96			
52521	128.6 to 129.6 feet	Vertical Change	.81"	5 ft	5	REF		
52522	130.3 to 133.3 feet	Vertical Change	.51"	5 ft	15	REF		
52523	134.3 to 135.3 feet	Vertical Change	3.79"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107140906	7TH ST	N O ST	N N ST	130

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52524	142.6 to 145.3 feet	Vertical Change	.89"	5 ft	14	REF		
52546	151.0 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
52547	153.4 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
52525	158.5 to 159.5 feet	Vertical Change	.26"	5 ft	5	REF		
52548	158.8 to 168.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,940
52549	171.8 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
52526	183.6 to 184.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
52558	183.8 to 207.8 feet	Key Note Segment		5 ft	120			
52527	185.6 to 186.6 feet	Vertical Change	.27"	5 ft	5	REF		
52528	188.2 to 189.2 feet	Vertical Change	-.26"	5 ft	5	REF		
52529	189.9 to 190.9 feet	Vertical Change	.43"	5 ft	5	REF		
52550	224.1 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
52551	229.1 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	$16,620
52530	233.4 to 234.4 feet	Vertical Change	3.43"	5 ft	5	REF		
52531	255.3 to 256.3 feet	Vertical Change	.51"	5 ft	5	REF		
52552	259.0 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360
52532	266.1 to 267.1 feet	Vertical Change	-.29"	5 ft	5	REF		
52553	270.0 to 277.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,260
52533	276.7 to 277.7 feet	Vertical Change	.36"	5 ft	5	REF		
52554	277.8 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **N O ST** **$88,045.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091407	7TH ST	S C ST	S D ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48120	2.6 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
48129	13.5 to 37.3 feet	Key Note Segment		5 ft	119			
48113	37.6 to 38.6 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
48121	41.7 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
48122	60.6 to 69.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,220**
48130	70.4 to 95.2 feet	Key Note Segment		5 ft	124			
48114	71.4 to 72.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
48115	102.3 to 103.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
48123	104.3 to 111.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
48131	124.0 to 149.2 feet	Key Note Segment		5 ft	126			
48116	127.4 to 128.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48132	149.2 to 150.7 feet		5.0-6.0%	5 ft	8			
48133	150.9 to 151.9 feet		6.0-7.0%	5 ft	5			
48134	151.9 to 153.3 feet		5.0-6.0%	5 ft	7			
48124	174.5 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
48117	188.0 to 189.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
48125	234.6 to 240.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
48118	244.1 to 245.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
48126	248.6 to 265.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
48119	260.1 to 261.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
48127	269.8 to 272.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
48128	272.8 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **S C ST** **$48,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081544	7TH ST	S D ST	S E ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46406	0.0 to 2.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	8	SF	$120	**$1,008**
46407	4.6 to 7.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	**$1,176**
46408	8.0 to 10.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	8	SF	$120	**$966**
46409	11.2 to 12.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$462**
46410	14.5 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,746**
46411	58.6 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,654**
46412	82.4 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$420**
46413	88.0 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,596**
46414	100.6 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,780**
46428	119.3 to 139.8 feet	Key Note Segment		4 ft	72			
46415	162.2 to 165.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,218**
46416	168.8 to 173.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,806**
46417	173.1 to 176.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	12	SF	$120	**$1,386**
46418	176.8 to 184.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,318**
46419	184.7 to 193.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	31	SF	$120	**$3,738**
46420	193.6 to 202.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,612**
46421	203.4 to 216.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	46	SF	$120	**$5,460**
46422	220.0 to 222.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$924**
46423	224.5 to 228.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,512**
46424	229.2 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$462**
46425	233.9 to 236.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,134**
46429	236.6 to 249.8 feet	Key Note Segment		4 ft	46			
46426	250.8 to 254.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,638**
46427	255.8 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$840**

TOTAL COST FOR: NW *side of* **7TH ST** *Starting at:* **S D ST** **$44,856.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091409	7TH ST	S D ST	305 S D ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48139	0.0 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
48135	14.0 to 15.0 feet	**Vertical Change**	-.43"	5 ft	5	REF		
48140	14.3 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
48136	31.1 to 32.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
48141	34.3 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
48142	49.7 to 52.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
48143	52.8 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48144	66.6 to 81.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
48145	83.4 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
48146	93.5 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
48137	101.0 to 102.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
48138	106.6 to 107.6 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
48147	113.8 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
48148	120.0 to 121.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48149	127.5 to 145.2 feet	Key Note Segment		5 ft	88			

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **S D ST** **$39,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081538	7TH ST	S E ST	308 D ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46393	0.0 to 21.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	105	SF	$120	**$12,600**
46389	17.2 to 18.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
46394	21.8 to 35.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
46395	36.5 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
46390	48.0 to 49.0 feet	**Vertical Change**	-.54"	5 ft	5	REF		
46391	56.6 to 57.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
46392	63.1 to 64.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
46400	63.3 to 101.3 feet	Key Note Segment		5 ft	190			
46396	102.8 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
46397	123.7 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
46398	137.5 to 141.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
46399	147.6 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: SE *side of* **7TH ST** *Starting at:* **S E ST** **$50,730.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130756	8TH ST	829 8TH ST	S I ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51104	1.9 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,192**
51101	4.0 to 5.0 feet	**Vertical Change**	.28"	4 ft	4	REF		
51105	15.5 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
51112	41.8 to 57.9 feet	Key Note Segment		4 ft	64			
51102	60.0 to 61.0 feet	**Vertical Change**	.31"	4 ft	4	REF		
51106	60.4 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
51107	71.8 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,920**
51108	75.8 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
51109	84.4 to 101.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	68	SF	$120	**$8,208**
51110	103.6 to 110.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,216**
51111	110.3 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,776**

TOTAL COST FOR: NW *side of* **8TH ST** *Starting at:* **829 8TH ST** **$34,176.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130737	8TH ST	N I ST	401 8TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50950	0.5 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
50951	18.6 to 23.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
50952	25.1 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
50953	32.6 to 33.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
50954	37.2 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
50947	58.6 to 59.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
50948	79.7 to 80.7 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
50955	87.9 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50956	92.8 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
50949	101.3 to 102.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
50957	105.7 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**

TOTAL COST FOR: NW *side of* **8TH ST** *Starting at:* **N I ST** **$27,405.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130741	8TH ST	N I ST	N K ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50973	0.0 to 1.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50958	1.0 to 2.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
50959	7.8 to 8.8 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
50974	9.7 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
50975	30.3 to 33.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
50976	43.7 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
50960	46.7 to 47.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
50977	50.2 to 82.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,440**
50961	59.4 to 60.4 feet	**Vertical Change**	-.77"	5 ft	5	REF		
50962	81.5 to 82.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
50978	82.6 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50979	87.3 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
50963	88.0 to 89.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
50964	91.5 to 92.5 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
50980	97.0 to 99.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
50965	103.0 to 104.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
50989	108.5 to 143.2 feet	Key Note Segment		5 ft	173			
50966	124.5 to 125.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50967	134.2 to 135.2 feet	**Vertical Change**	.8"	5 ft	5	REF		
50968	143.2 to 144.2 feet	**Vertical Change**	3.49"	5 ft	5	REF		
50981	158.0 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
50969	162.9 to 163.9 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
50982	164.4 to 170.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
50983	170.9 to 206.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,360**
50970	184.5 to 185.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
50971	206.2 to 207.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
50984	216.0 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
50972	227.8 to 228.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130741	8TH ST	N I ST	N K ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50985	230.8 to 236.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
50986	237.3 to 238.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50987	242.8 to 263.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
50988	265.8 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: NW *side of* **8TH ST** *Starting at:* **N I ST** **$87,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130752	8TH ST	N J ST	N I ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51070	1.2 to 5.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
51071	5.6 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
51072	13.0 to 21.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
51090	21.8 to 22.8 feet	**Protruding Object**	52"	5 ft	5	JOB	$99	**$99**
51073	24.1 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
51074	41.8 to 50.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
51059	45.5 to 46.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
51087	50.6 to 68.7 feet	Key Note Segment		5 ft	91			
51060	52.2 to 53.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
51075	69.7 to 85.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
51076	85.8 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51077	89.7 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
51078	95.4 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
51061	103.9 to 104.9 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
51062	106.0 to 107.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
51088	110.2 to 145.1 feet	Key Note Segment		5 ft	175			
51063	115.6 to 119.3 feet	**Vertical Change**	.35"	5 ft	19	REF		
51064	125.4 to 126.4 feet	**Vertical Change**	-.46"	5 ft	5	REF		
51065	127.7 to 128.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
51066	142.7 to 143.7 feet	**Vertical Change**	1.29"	5 ft	5	REF		
51079	146.0 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
51080	163.1 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
51067	164.0 to 165.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
51081	166.8 to 195.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	144	SF	$120	**$17,280**
51082	197.5 to 205.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
51089	205.0 to 217.5 feet	Key Note Segment		5 ft	63			
51083	221.1 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
51068	228.4 to 229.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130752	8TH ST	N J ST	N I ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51069	249.8 to 250.8 feet	Vertical Change	-.38"	5 ft	5	LF	$75	**$375**
51084	261.2 to 262.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
51085	265.8 to 268.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
51086	268.1 to 270.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**

TOTAL COST FOR: SE *side of* **8TH ST** *Starting at:* **N J ST** **$93,024.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107130743	8TH ST	N K ST	607 8TH ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50995	0.0 to 16.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
50996	17.3 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,500**
50990	17.8 to 18.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
50991	32.0 to 33.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
51002	34.8 to 51.3 feet	Key Note Segment		5 ft	83			
50997	54.3 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
50998	68.5 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
51003	79.9 to 90.3 feet	Key Note Segment		5 ft	52			
50999	91.5 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50992	102.4 to 103.4 feet	**Vertical Change**	1.39"	5 ft	5	SF	$75	**$375**
50993	113.1 to 114.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
51000	117.8 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
50994	118.9 to 119.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
51004	122.3 to 123.8 feet		6.0-7.0%	5 ft	8			
51001	122.6 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: NW *side of* **8TH ST** *Starting at:* **N K ST** **$36,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130749	8TH ST	N K ST	S J ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51032	0.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
51033	5.9 to 10.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
51034	10.1 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51013	12.0 to 13.0 feet	**Vertical Change**	1.72"	5 ft	5	SF	$75	**$375**
51014	17.4 to 18.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
51015	21.9 to 22.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
51035	33.1 to 34.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51036	36.1 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
51037	44.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
51055	52.8 to 59.6 feet	Key Note Segment		5 ft	34			
51038	59.8 to 71.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	60	SF	$40	**$2,400**
51016	62.6 to 63.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
51058	67.4 to 68.4 feet	**Continuous Width**	12"	5 ft	5	SF	$120	**$600**
51039	78.3 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
51017	82.3 to 83.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
51040	92.6 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
51056	97.0 to 106.2 feet	Key Note Segment		5 ft	46			
51041	106.9 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
51042	110.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
51018	116.6 to 117.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
51043	117.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
51019	120.9 to 121.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
51020	122.6 to 123.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
51057	123.8 to 144.3 feet	Key Note Segment		5 ft	103			
51021	125.0 to 126.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
51022	127.3 to 128.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
51023	130.7 to 131.7 feet	**Vertical Change**	3.56"	5 ft	5	REF		
51024	132.5 to 133.5 feet	**Vertical Change**	.54"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130749	8TH ST	N K ST	S J ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51025	135.2 to 136.2 feet	Vertical Change	3.47"	5 ft	5	REF		
51026	137.3 to 138.3 feet	Vertical Change	2.83"	5 ft	5	REF		
51027	139.9 to 140.9 feet	Vertical Change	.43"	5 ft	5	REF		
51044	145.5 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
51045	157.7 to 158.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
51046	159.2 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
51047	166.9 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
51048	188.3 to 196.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
51049	198.9 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
51050	206.5 to 213.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
51051	216.1 to 217.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
51028	218.2 to 219.2 feet	Vertical Change	.44"	5 ft	5	LF	$75	**$375**
51052	230.4 to 233.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
51053	240.8 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
51029	243.3 to 244.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
51054	245.3 to 246.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
51030	249.7 to 250.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
51031	265.2 to 266.2 feet	Vertical Change	-.4"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SE *side of* **8TH ST** *Starting at:* **N K ST** **$63,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130745	8TH ST	N L ST	401 8TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51005	0.9 to 1.9 feet	Vertical Change	.61"	5 ft	5	SF	$75	$375
51008	6.1 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
51006	9.3 to 10.3 feet	Vertical Change	.27"	5 ft	5	REF		
51009	12.8 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
51010	28.5 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
51011	39.6 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
51012	56.3 to 72.9 feet	Key Note Segment		5 ft	83			
51007	66.2 to 67.2 feet	Vertical Change	.42"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **8TH ST** *Starting at:* **N L ST** **$14,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107130754	8TH ST	S I ST	310 W 8TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51093	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
51100	0.0 to 1.4 feet		5.0-6.0%	4 ft	6			
51094	26.3 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
51091	35.2 to 36.2 feet	**Vertical Change**	.39"	4 ft	4	LF	$75	**$300**
51095	56.0 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,312**
51092	56.5 to 57.5 feet	**Vertical Change**	.36"	4 ft	4	REF		
51096	77.5 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
51097	79.2 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
51098	83.3 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
51099	90.6 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**

TOTAL COST FOR: SE *side of* **8TH ST** *Starting at:* **S I ST** **$19,452.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091621	9TH ST	211 9TH ST	S D ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48994	17.9 to 18.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
48995	26.7 to 27.7 feet	**Vertical Change**	-1.38"	5 ft	5	SF	$75	**$375**
49002	28.3 to 29.3 feet		5.0-6.0%	5 ft	5			
49001	30.8 to 43.9 feet	Key Note Segment		5 ft	66			
48996	46.1 to 47.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
48998	47.4 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
48999	81.8 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
48997	92.9 to 93.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
49000	106.0 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **211 9TH ST** **$41,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091137	9TH ST	500 S D ST	S D ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47588	0.7 to 1.7 feet	Vertical Change	1.15"	5 ft	5	REF		
47590	1.3 to 6.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000
47591	9.0 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
47597	12.3 to 38.2 feet	Key Note Segment		5 ft	130			
47589	12.8 to 13.8 feet	Vertical Change	.26"	5 ft	5	REF		
47592	38.2 to 41.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$620
47593	45.3 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
47594	66.8 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
47595	100.3 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
47596	115.9 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120

TOTAL COST FOR: SE *side of* **9TH ST** *Starting at:* **500 S D ST** **$19,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101150	9TH ST	614 9TH ST	614 9TH ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56073	2.4 to 16.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	56	SF	$120	**$6,720**
56078	17.4 to 30.5 feet	Key Note Segment		4 ft	52			
56071	29.0 to 30.0 feet	**Vertical Change**	.4"	4 ft	4	REF		
56074	31.3 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
56075	36.7 to 39.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**
56076	41.9 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	68	SF	$120	**$8,208**
56072	51.9 to 52.9 feet	**Vertical Change**	-.41"	4 ft	4	REF		
56077	61.3 to 71.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,800**
56079	70.8 to 71.8 feet		5.0-6.0%	4 ft	4			

TOTAL COST FOR: SE *side of* **9TH ST** *Starting at:* **614 9TH ST** **$23,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101153	9TH ST	615 9TH ST	S LAKE ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56081	0.4 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
56082	5.6 to 16.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
56080	9.2 to 10.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
56083	21.2 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
56084	27.8 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
56092	44.1 to 59.6 feet	Key Note Segment		5 ft	78			
56085	60.8 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
56086	68.3 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
56093	82.0 to 114.6 feet	Key Note Segment		5 ft	163			
56087	115.2 to 122.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	36	SF	$40	**$1,420**
56088	122.8 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
56089	127.4 to 131.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
56090	131.6 to 134.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
56091	139.1 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	114	SF	$120	**$13,620**

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **615 9TH ST** **$53,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091614	9TH ST	S B ST	313 9TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48970	0.0 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
48977	17.7 to 34.7 feet	Key Note Segment		5 ft	85			
48966	18.2 to 19.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
48971	34.7 to 39.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$860**
48972	44.5 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48978	47.7 to 57.0 feet	Key Note Segment		5 ft	47			
48973	57.0 to 62.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,060**
48967	61.0 to 62.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
48974	75.8 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
48969	82.4 to 83.4 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
48979	85.0 to 94.0 feet	Key Note Segment		5 ft	45			
48975	100.3 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
48976	119.5 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **S B ST** **$25,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091616	9TH ST	S C ST	417 S C ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48980	3.8 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
48981	11.6 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	161	SF	$120	**$19,320**
48982	43.8 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
48983	93.8 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
48984	102.8 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
48985	111.9 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48986	117.3 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **S C ST** **$36,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091619	9TH ST	S C ST	424 S C ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48987	1.2 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
48988	18.1 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
48989	26.1 to 69.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	215	SF	$120	**$25,740**
48990	69.3 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
48993	76.8 to 88.8 feet	Key Note Segment		5 ft	60			
48991	89.8 to 113.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,340**
48992	117.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **S C ST** **$63,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091627	9TH ST	S C ST	S B ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49030	1.0 to 2.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
49031	2.3 to 20.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	90	SF	$120	**$10,860**
49032	20.4 to 29.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	43	SF	$120	**$5,160**
49033	37.2 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
49034	55.5 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
49042	69.4 to 101.6 feet	Key Note Segment		5 ft	161			
49027	82.9 to 83.9 feet	**Vertical Change**	.77"	5 ft	5	REF		
49035	102.3 to 116.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	72	SF	$40	**$2,860**
49043	126.4 to 145.8 feet	Key Note Segment		5 ft	97			
49028	146.6 to 147.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
49036	147.3 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
49037	162.2 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
49038	166.2 to 188.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
49039	192.7 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
49044	209.3 to 242.3 feet	Key Note Segment		5 ft	165			
49029	210.0 to 211.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
49040	242.8 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,460**
49041	261.5 to 271.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: SE *side of* **9TH ST** *Starting at:* **S C ST** **$69,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091135	9TH ST	S D ST	123 9TH ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47582	8.3 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47586	10.0 to 26.8 feet	Key Note Segment		5 ft	84			
47583	27.1 to 29.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	11	SF	$40	**$440**
47584	30.2 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
47585	41.7 to 44.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
47587	44.5 to 73.9 feet	Key Note Segment		5 ft	147			

TOTAL COST FOR: NW *side of* **9TH ST** *Starting at:* **S D ST** **$9,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091624	9TH ST	S D ST	S C ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49008	0.0 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
49003	13.0 to 14.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
49004	18.1 to 19.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
49009	27.4 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
49010	38.2 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
49011	55.7 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
49012	67.6 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
49013	94.5 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
49014	105.4 to 110.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
49015	112.6 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
49016	121.9 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49024	124.9 to 143.3 feet	Key Note Segment		5 ft	92			
49005	143.5 to 144.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
49017	143.5 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49025	144.6 to 154.7 feet	Key Note Segment		5 ft	50			
49018	162.1 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
49019	193.4 to 199.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
49026	200.8 to 209.5 feet	Key Note Segment		5 ft	44			
49020	209.5 to 227.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	92	SF	$40	**$3,660**
49006	214.5 to 215.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
49021	229.9 to 234.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
49022	234.1 to 240.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
49007	251.0 to 252.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
49023	265.1 to 272.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: SE *side of* **9TH ST** *Starting at:* **S D ST** **$81,630.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111158	A ST	HULL AVE	WALLACE AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58994	0.0 to 8.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
58995	10.5 to 18.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
59007	18.6 to 33.5 feet	Key Note Segment		5 ft	74			
59008	35.3 to 57.1 feet	Key Note Segment		5 ft	109			
58996	58.3 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
58997	75.8 to 79.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
58998	79.6 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
58999	92.7 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
58993	95.2 to 96.2 feet	**Vertical Change**	1.25"	5 ft	5	REF		
59000	106.3 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
59009	107.8 to 123.9 feet	Key Note Segment		5 ft	81			
59001	124.7 to 127.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
59002	129.2 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
59003	153.0 to 167.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
59004	170.8 to 196.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,420**
59005	199.0 to 214.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
59006	217.1 to 222.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
59010	221.3 to 222.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **HULL AVE** **$87,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111216	A ST	HULL AVE	KNOX CT	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59166	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
59167	3.8 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
59168	10.6 to 36.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
59169	40.5 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
59212	54.5 to 75.4 feet	Key Note Segment		5 ft	105			
59213	75.8 to 93.5 feet	Key Note Segment		5 ft	89			
59150	91.9 to 92.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
59170	95.1 to 101.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
59151	99.2 to 100.2 feet	**Vertical Change**	1.47"	5 ft	5	REF		
59171	102.4 to 104.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
59172	104.7 to 109.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
59173	110.0 to 115.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,420**
59174	116.8 to 130.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	69	SF	$120	**$8,220**
59175	130.8 to 133.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
59176	134.5 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
59177	140.8 to 156.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
59153	156.4 to 157.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
59214	157.3 to 172.3 feet	Key Note Segment		5 ft	75			
59215	174.8 to 187.6 feet	Key Note Segment		5 ft	64			
59178	188.3 to 199.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
59154	191.7 to 192.7 feet	**Vertical Change**	2.72"	5 ft	5	REF		
59179	203.3 to 213.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
59155	213.3 to 214.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
59216	217.3 to 229.8 feet	Key Note Segment		5 ft	63			
59156	218.8 to 219.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
59180	230.9 to 240.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
59217	240.1 to 254.7 feet	Key Note Segment		5 ft	73			
59157	241.6 to 242.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111216	A ST	HULL AVE	KNOX CT	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59181	256.5 to 272.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
59159	270.6 to 271.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
59182	276.5 to 286.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
59183	288.3 to 290.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
59184	297.9 to 305.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
59185	305.6 to 318.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
59218	318.4 to 334.1 feet	Key Note Segment		5 ft	79			
59186	334.1 to 339.5 feet	**Cross Slope (Driveway)**	>15.0%	5 ft	27	SF	$40	**$1,080**
59187	343.3 to 344.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
59188	347.4 to 352.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
59189	354.3 to 359.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
59160	354.7 to 355.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
59190	362.6 to 387.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
59161	371.9 to 372.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
59162	380.4 to 381.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
59219	388.0 to 408.4 feet	Key Note Segment		5 ft	102			
59163	397.8 to 398.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59191	408.8 to 411.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
59192	411.3 to 417.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
59193	418.7 to 427.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
59194	432.0 to 436.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
59164	440.4 to 441.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
59195	440.6 to 445.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
59165	446.9 to 447.9 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
59196	448.3 to 451.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
59197	452.5 to 457.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
59220	457.5 to 482.8 feet	Key Note Segment		5 ft	127			
59198	484.1 to 490.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111216	A ST	HULL AVE	KNOX CT	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59199	492.7 to 493.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
59200	493.7 to 497.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
59201	500.4 to 501.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
59202	504.8 to 526.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
59203	527.7 to 530.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
59221	532.3 to 549.3 feet	Key Note Segment		5 ft	85			
59204	550.8 to 556.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
59205	557.3 to 566.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
59206	566.4 to 568.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
59207	571.8 to 584.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
59208	584.8 to 596.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
59209	599.0 to 637.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	194	SF	$120	**$23,220**
59210	640.3 to 644.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
59211	644.0 to 646.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **A ST** *Starting at:* **HULL AVE** **$223,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111252	A ST	KENNEY CT	KNOX AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59456	1.0 to 7.6 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	46	SF	$120	**$5,544**
59457	10.2 to 40.5 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	212	SF	$120	**$25,452**
59458	40.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	154	SF	$120	**$18,480**
59459	76.6 to 81.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	31	SF	$120	**$3,696**
59460	85.5 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	55	SF	$120	**$6,552**
59461	93.3 to 98.1 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	34	SF	$120	**$4,032**
59462	113.5 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	7	SF	$120	**$840**
59450	120.8 to 121.8 feet	**Vertical Change**	.26"	7 ft	7	LF	$75	**$525**
59463	125.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,260**
59464	140.2 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	44	SF	$120	**$5,292**
59465	234.2 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	387	SF	$120	**$46,452**
59452	264.5 to 265.5 feet	**Vertical Change**	.56"	7 ft	7	REF		
59466	294.0 to 295.9 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	13	SF	$120	**$1,596**
59467	298.7 to 300.7 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	14	SF	$120	**$1,680**
59468	303.0 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	13	SF	$120	**$1,512**
59453	303.6 to 304.6 feet	**Vertical Change**	-.26"	7 ft	7	REF		
59469	308.3 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	168	SF	$120	**$20,160**
59454	320.8 to 321.8 feet	**Vertical Change**	-.32"	7 ft	7	REF		
59470	339.5 to 340.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	7	SF	$120	**$840**
59455	342.1 to 343.1 feet	**Vertical Change**	.4"	7 ft	7	LF	$75	**$525**

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **KENNEY CT** **$144,438.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111035	A ST	KNOX AVE	STINSON AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58163	1.5 to 21.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
58164	24.1 to 27.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
58165	29.4 to 36.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,140**
58182	36.3 to 56.8 feet	Key Note Segment		5 ft	103			
58166	56.8 to 58.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
58167	58.7 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
58168	63.9 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
58169	70.2 to 71.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
58170	72.8 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
58171	76.2 to 78.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
58172	80.1 to 85.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
58173	89.3 to 117.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	**$16,860**
58174	119.8 to 131.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
58183	131.0 to 145.8 feet	Key Note Segment		5 ft	74			
58175	146.3 to 149.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	13	SF	$40	**$540**
58176	150.3 to 161.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,540**
58177	163.7 to 179.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
58178	183.3 to 188.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
58179	188.4 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
58180	200.7 to 207.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
58181	208.3 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **KNOX AVE** **$82,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111225	A ST	KNOX CT	295 KNOX CT	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59316	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
59317	10.7 to 13.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
59318	15.0 to 22.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
59319	23.3 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
59320	35.3 to 50.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
59321	53.0 to 59.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
59322	62.4 to 67.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
59323	69.8 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
59324	79.3 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
59315	87.1 to 88.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
59325	87.6 to 88.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **A ST** *Starting at:* **KNOX CT** **$37,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111245	A ST	RD 28	KENNEY CT	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59372	0.0 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
59373	4.5 to 5.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
59374	13.9 to 15.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
59375	17.2 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
59408	50.3 to 52.1 feet		5.0-6.0%	5 ft	9			
59376	71.5 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
59377	96.7 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
59365	106.9 to 107.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
59378	109.8 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59379	127.0 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
59380	133.0 to 134.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
59381	137.9 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
59382	160.7 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
59366	164.7 to 165.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
59367	173.1 to 174.1 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
59383	191.1 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
59384	201.8 to 213.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
59385	216.4 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
59386	228.2 to 232.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
59387	235.9 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
59388	239.5 to 246.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
59389	257.1 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
59390	270.4 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
59391	289.0 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
59392	305.9 to 309.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
59393	347.3 to 348.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59394	357.1 to 361.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
59395	380.2 to 382.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111245	A ST	RD 28	KENNEY CT	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59368	396.6 to 397.6 feet	Vertical Change	-.31"	5 ft	5	REF		
59396	396.8 to 399.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
59397	399.7 to 400.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
59398	410.4 to 413.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
59399	462.1 to 465.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
59400	478.8 to 481.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
59369	489.6 to 490.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
59407	505.3 to 528.8 feet	Key Note Segment		5 ft	117			
59370	517.8 to 518.8 feet	Vertical Change	.26"	5 ft	5	REF		
59401	529.5 to 540.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,780
59402	540.8 to 587.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	$27,960
59403	590.8 to 592.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
59404	598.8 to 608.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
59405	613.8 to 626.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
59371	624.7 to 625.7 feet	Vertical Change	.33"	5 ft	5	REF		
59406	627.3 to 630.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,680

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **RD 28** **$114,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111136	A ST	ROOSEVELT AVE	WALLACE AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58798	4.8 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
58799	12.3 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
58795	15.0 to 16.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
58800	30.8 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
58801	56.3 to 68.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
58802	82.7 to 102.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
58809	116.7 to 134.8 feet	Key Note Segment		5 ft	91			
58803	134.8 to 143.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,700**
58804	144.9 to 150.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
58805	152.8 to 205.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	261	SF	$120	**$31,380**
58797	176.1 to 177.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
58806	205.1 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
58807	208.4 to 223.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
58808	223.3 to 226.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: S *side of* **A ST** *Starting at:* **ROOSEVELT AVE** **$84,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111055	A ST	STINSON AVE	HULL AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58393	5.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
58394	30.7 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
58395	37.7 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,060**
58391	45.3 to 46.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
58396	48.6 to 52.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
58408	52.0 to 64.5 feet	Key Note Segment		5 ft	63			
58392	54.3 to 55.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
58397	64.9 to 70.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
58398	71.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,840**
58399	113.2 to 130.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
58409	130.5 to 144.4 feet	Key Note Segment		5 ft	70			
58400	145.3 to 153.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
58401	154.0 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
58402	185.5 to 190.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
58403	193.5 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
58404	204.4 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
58405	208.7 to 211.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
58406	213.8 to 221.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
58407	223.5 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **STINSON AVE** **$105,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111133	A ST	WALLACE AVE	ROOSEVELT AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58773	6.9 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58774	20.5 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58775	23.4 to 34.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,840**
58776	36.8 to 40.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
58777	47.1 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
58778	50.9 to 54.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
58768	53.4 to 54.4 feet	**Vertical Change**	.96"	5 ft	5	REF		
58779	61.2 to 68.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
58792	69.3 to 81.3 feet	Key Note Segment		5 ft	60			
58769	75.8 to 76.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
58780	81.3 to 95.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	69	SF	$40	**$2,740**
58781	95.0 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
58793	97.2 to 114.8 feet	Key Note Segment		5 ft	88			
58782	116.1 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
58783	118.4 to 119.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
58770	120.6 to 121.6 feet	**Vertical Change**	1.32"	5 ft	5	SF	$75	**$375**
58784	121.8 to 128.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
58785	129.3 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58771	130.9 to 131.9 feet	**Vertical Change**	3.27"	5 ft	5	SF	$75	**$375**
58786	145.5 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
58772	163.9 to 164.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
58787	165.1 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
58794	168.3 to 187.9 feet	Key Note Segment		5 ft	98			
58788	191.3 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,800**
58789	214.3 to 219.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
58790	219.7 to 225.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
58791	225.2 to 231.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: N *side of* **A ST** *Starting at:* **WALLACE AVE** **$61,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111201	A ST	WALLACE AVE	HULL AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59012	0.0 to 4.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
59013	4.6 to 9.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
59025	9.8 to 25.3 feet	Key Note Segment		5 ft	77			
59014	25.5 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
59015	32.6 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
59016	40.5 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
59017	65.3 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
59018	89.8 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
59026	99.8 to 123.3 feet	Key Note Segment		5 ft	118			
59019	124.0 to 140.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
59011	132.9 to 133.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
59027	140.6 to 162.8 feet	Key Note Segment		5 ft	111			
59020	164.1 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
59021	167.7 to 171.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
59022	171.6 to 174.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
59023	176.3 to 201.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
59024	205.1 to 220.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
59028	219.8 to 220.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **A ST** *Starting at:* **WALLACE AVE** **$85,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251326	ACCORNERO AVE	512 ACCORNERO AVE	NATIONAL AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108365	0.7 to 4.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	20	SF	$120	**$2,400**
108354	1.5 to 2.5 feet	**Vertical Change**	.86"	5 ft	5	REF		
108366	8.9 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
108367	12.8 to 13.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
108355	14.7 to 15.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
108368	14.8 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
108356	23.8 to 24.8 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
108369	26.8 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
108370	37.6 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
108357	40.1 to 41.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
108385	47.9 to 49.2 feet		6.0-7.0%	5 ft	7			
108358	48.6 to 49.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
108371	85.9 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
108359	99.1 to 100.1 feet	**Vertical Change**	-.93"	5 ft	5	SF	$75	**$375**
108372	100.9 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108373	107.3 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
108360	116.6 to 117.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
108386	124.7 to 127.9 feet		5.0-6.0%	5 ft	16			
108374	125.1 to 128.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
108361	125.5 to 126.5 feet	**Vertical Change**	-.65"	5 ft	5	REF		
108375	129.1 to 134.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
108376	140.9 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
108377	148.1 to 161.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
108378	162.8 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,500**
108379	174.1 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
108362	186.7 to 187.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
108380	187.3 to 188.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
108387	187.8 to 189.3 feet		8.0-9.0%	5 ft	8			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251326	ACCORNERO AVE	512 ACCORNERO AVE	NATIONAL AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108381	188.6 to 196.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	40	SF	$120	**$4,740**
108388	190.0 to 191.4 feet		6.0-7.0%	5 ft	7			
108389	191.4 to 192.8 feet		5.0-6.0%	5 ft	7			
108363	194.3 to 195.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
108382	197.7 to 202.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
108364	204.0 to 205.0 feet	**Vertical Change**	-.85"	5 ft	5	SF	$75	**$375**
108390	204.1 to 206.7 feet		7.0-8.0%	5 ft	13			
108391	207.0 to 212.8 feet		5.0-6.0%	5 ft	29			
108392	207.0 to 212.8 feet	Running Slope	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
108383	209.1 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
108384	216.0 to 217.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: W *side of* **ACCORNERO AVE** *Starting at:* **512 ACCORNERO AVE** **$67,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251324	ACCORNERO AVE	SUNSET AVE	516 ACCORNERO AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108336	17.6 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
108337	47.5 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108325	49.5 to 50.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
108338	63.1 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
108326	67.0 to 68.0 feet	**Vertical Change**	-.9"	5 ft	5	REF		
108339	67.8 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
108340	71.1 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
108327	84.5 to 85.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
108341	86.1 to 87.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
108342	90.2 to 104.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
108328	102.4 to 103.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
108343	104.3 to 110.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,960**
108344	113.0 to 114.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
108345	115.5 to 117.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
108346	134.3 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
108329	138.2 to 139.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
108347	146.5 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
108348	151.1 to 155.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
108330	163.8 to 164.8 feet	**Vertical Change**	-.69"	5 ft	5	SF	$75	**$375**
108349	170.5 to 180.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
108350	180.1 to 181.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
108331	187.5 to 188.5 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
108351	195.2 to 198.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
108352	200.2 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
108332	204.7 to 205.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
108353	209.8 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
108334	212.1 to 213.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
108335	231.6 to 232.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251324	ACCORNERO AVE	SUNSET AVE	516 ACCORNERO AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: W	*side of* **ACCORNERO AVE**	*Starting at:* **SUNSET AVE**						**$49,965.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281210	ACORN CT	1490 ACORN CT	1491 ACORN CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112639	0.6 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
112640	2.5 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
112641	9.3 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
112642	15.2 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,260**
112643	32.8 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
112644	42.6 to 46.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
112638	45.6 to 46.6 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ACORN CT** *Starting at:* **1490 ACORN CT** **$23,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281212	ACORN CT	1491 ACORN CT	CHESTNUT AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112651	0.0 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
112652	2.3 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
112661	22.9 to 42.4 feet	Key Note Segment		5 ft	98			
112645	23.5 to 24.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
112653	46.0 to 48.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
112646	50.8 to 51.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112654	51.5 to 72.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,540**
112655	74.5 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
112662	86.8 to 106.8 feet	Key Note Segment		5 ft	100			
112647	96.5 to 97.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
112656	109.0 to 110.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
112648	109.9 to 110.9 feet	**Vertical Change**	-.54"	5 ft	5	REF		
112657	111.3 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112663	113.4 to 132.3 feet	Key Note Segment		5 ft	95			
112649	122.7 to 123.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112650	132.7 to 133.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
112658	133.6 to 140.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
112659	140.9 to 144.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
112660	146.8 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,660**

TOTAL COST FOR: E *side of* **ACORN CT** *Starting at:* **1491 ACORN CT** **$49,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281209	ACORN CT	CHESTNUT AVE	1490 ACORN CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112618	1.3 to 2.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
112625	2.4 to 10.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
112626	10.5 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
112619	15.6 to 16.6 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
112635	28.1 to 47.9 feet	Key Note Segment		5 ft	99			
112627	48.9 to 53.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
112636	54.3 to 74.0 feet	Key Note Segment		5 ft	99			
112620	65.2 to 66.2 feet	Vertical Change	.26"	5 ft	5	REF		
112621	74.2 to 75.2 feet	Vertical Change	-.38"	5 ft	5	REF		
112628	75.9 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	$11,340
112622	83.4 to 84.4 feet	Vertical Change	-.41"	5 ft	5	REF		
112629	94.8 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	$14,100
112623	107.8 to 108.8 feet	Vertical Change	.26"	5 ft	5	REF		
112624	111.4 to 112.4 feet	Vertical Change	-.41"	5 ft	5	REF		
112637	118.3 to 137.8 feet	Key Note Segment		5 ft	98			
112630	140.3 to 142.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$1,020
112631	144.9 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
112632	149.8 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	$14,100
112633	179.2 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
112634	186.6 to 193.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840

TOTAL COST FOR: W *side of* **ACORN CT** *Starting at:* **CHESTNUT AVE** **$57,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081139	ADAMS AVE	E ELLIS ST	EISENHOWER LN	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125997	2.2 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
125998	13.3 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
125999	27.5 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
126000	44.4 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
125995	50.2 to 51.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
126001	54.6 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
126002	66.7 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
125996	71.6 to 72.6 feet	**Vertical Change**	2.79"	5 ft	5	REF		
126003	73.0 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: W *side of* **ADAMS AVE** *Starting at:* **E ELLIS ST** **$32,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081210	ADAMS AVE	E KENNEDY ST	TYLER LN	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126255	0.0 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
126251	2.6 to 3.6 feet	**Vertical Change**	.73"	5 ft	5	REF		
126256	5.8 to 48.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,620**
126252	40.0 to 41.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
126257	48.8 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
126258	57.9 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
126253	58.5 to 59.5 feet	**Vertical Change**	1.4"	5 ft	5	REF		
126254	74.4 to 75.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **ADAMS AVE** *Starting at:* **E KENNEDY ST** **$44,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081329	ADAMS AVE	EISENHOWER LN	E ELLIS ST	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127007	0.0 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
127008	2.1 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
127009	27.4 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
127010	38.1 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
127011	44.8 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
127006	76.1 to 77.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ADAMS AVE** *Starting at:* **EISENHOWER LN** **$24,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081158	ADAMS AVE	TYLER LN	E KENNEDY ST	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126200	0.8 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
126201	6.5 to 9.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
126202	11.6 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
126197	23.5 to 24.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
126203	24.3 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
126198	32.1 to 33.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
126204	35.0 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
126199	49.3 to 50.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
126205	64.1 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
126206	64.8 to 65.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: W *side of* **ADAMS AVE** *Starting at:* **TYLER LN** **$39,519.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071406	ADANAC CT	1714 ADANAC CT	ADANAC WAY	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124007	0.9 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
124003	1.6 to 2.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
124014	3.3 to 25.1 feet	Key Note Segment		5 ft	109			
124004	26.0 to 27.0 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
124008	29.3 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
124015	36.2 to 57.9 feet	Key Note Segment		5 ft	108			
124009	60.0 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
124010	69.0 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
124016	73.0 to 93.1 feet	Key Note Segment		5 ft	101			
124005	73.3 to 74.3 feet	**Vertical Change**	-.48"	5 ft	5	REF		
124011	95.8 to 97.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
124006	96.4 to 97.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
124012	100.9 to 112.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
124013	112.2 to 123.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**

TOTAL COST FOR: E *side of* **ADANAC CT** *Starting at:* **1714 ADANAC CT** **$23,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071404	ADANAC CT	ADANAC WAY	1714 ADANAC CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123996	1.2 to 27.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,780**
124000	27.5 to 48.8 feet	Key Note Segment		5 ft	107			
123997	51.3 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
124001	56.3 to 77.9 feet	Key Note Segment		5 ft	108			
123990	78.6 to 79.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
123991	80.6 to 81.6 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
123992	83.8 to 84.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
123998	89.8 to 91.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
123993	90.8 to 91.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
124002	91.8 to 111.7 feet	Key Note Segment		5 ft	100			
123994	101.6 to 102.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
123995	112.1 to 113.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
123999	115.3 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **ADANAC CT** *Starting at:* **ADANAC WAY** **$21,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071328	ADANAC WAY	1200 ADANAC WAY	1713 ADANAC WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123749	3.5 to 21.2 feet	Key Note Segment		4 ft	71			
123748	23.3 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
123750	25.8 to 26.8 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**

TOTAL COST FOR: S *side of* **ADANAC WAY** *Starting at:* **1200 ADANAC WAY** **$627.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071330	ADANAC WAY	1202 ADANAC WAY	JESSE DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123758	0.9 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
123759	18.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
123768	24.8 to 42.3 feet	Key Note Segment		4 ft	70			
123751	25.3 to 26.3 feet	**Vertical Change**	.32"	4 ft	4	REF		
123760	45.8 to 47.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
123752	52.3 to 55.0 feet	**Vertical Change**	.51"	4 ft	11	SF	$75	**$810**
123772	54.2 to 55.2 feet	**Protruding Object**	48"	4 ft	4	JOB	$99	**$99**
123761	56.6 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
123769	80.0 to 98.4 feet	Key Note Segment		4 ft	74			
123753	98.5 to 99.5 feet	**Vertical Change**	.41"	4 ft	4	REF		
123762	102.3 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
123770	105.7 to 124.2 feet	Key Note Segment		4 ft	74			
123754	123.8 to 124.8 feet	**Vertical Change**	-.34"	4 ft	4	REF		
123763	125.7 to 129.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
123764	132.7 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
123765	138.6 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,896**
123771	158.3 to 174.8 feet	Key Note Segment		4 ft	66			
123755	162.1 to 163.1 feet	**Vertical Change**	1.38"	4 ft	4	REF		
123756	163.8 to 164.8 feet	**Vertical Change**	.41"	4 ft	4	REF		
123766	176.0 to 177.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
123767	184.8 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
123757	198.3 to 199.3 feet	**Vertical Change**	.5"	4 ft	4	SF	$75	**$300**

TOTAL COST FOR: S *side of* **ADANAC WAY** *Starting at:* **1202 ADANAC WAY** **$21,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071327	ADANAC WAY	1205 ADANAC WAY,	1200 ADANAC WAY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123737	0.0 to 3.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	13	SF	$120	**$1,536**
123738	6.3 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**
123745	10.1 to 27.8 feet	Key Note Segment		4 ft	71			
123733	28.0 to 29.0 feet	**Vertical Change**	.36"	4 ft	4	REF		
123739	29.3 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
123734	48.0 to 49.0 feet	**Vertical Change**	-.48"	4 ft	4	LF	$75	**$300**
123740	54.0 to 56.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	9	SF	$120	**$1,056**
123735	54.6 to 55.6 feet	**Vertical Change**	.33"	4 ft	4	REF		
123741	56.2 to 57.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
123742	59.9 to 62.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	12	SF	$120	**$1,392**
123743	62.8 to 66.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
123746	67.1 to 83.7 feet	Key Note Segment		4 ft	66			
123736	67.7 to 68.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
123747	86.4 to 87.4 feet	**Continuous Width**	24"	4 ft	4	SF	$120	**$480**
123744	87.8 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: N *side of* **ADANAC WAY** *Starting at:* **1205 ADANAC WAY, MADERA,** **$16,476.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071408	ADANAC WAY	ADANAC CT	MADISON DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124023	1.6 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
124024	15.8 to 20.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
124025	24.1 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
124026	43.0 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
124027	50.9 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
124017	51.3 to 52.3 feet	**Vertical Change**	.59"	5 ft	5	REF		
124035	53.1 to 74.8 feet	Key Note Segment		5 ft	109			
124018	56.3 to 57.3 feet	**Vertical Change**	2.84"	5 ft	5	REF		
124019	67.7 to 71.0 feet	**Vertical Change**	2.11"	5 ft	17	REF		
124020	72.5 to 73.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
124028	77.1 to 84.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
124029	87.0 to 93.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
124030	94.0 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
124031	102.7 to 121.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
124032	122.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
124022	140.3 to 141.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
124033	145.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
124034	151.4 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: S *side of* **ADANAC WAY** *Starting at:* **ADANAC CT** **$67,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071421	ADANAC WAY	DOMINGUEZ DR	JESSE DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124133	0.0 to 3.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
124120	5.3 to 6.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
124134	5.3 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
124121	9.0 to 10.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
124135	9.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
124156	23.1 to 43.1 feet	Key Note Segment		5 ft	100			
124136	43.9 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
124122	44.0 to 45.0 feet	**Vertical Change**	.56"	5 ft	5	REF		
124137	45.6 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
124123	55.9 to 56.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
124124	66.9 to 67.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
124157	76.2 to 92.6 feet	Key Note Segment		5 ft	82			
124125	93.3 to 94.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
124138	95.3 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
124139	106.3 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
124140	126.7 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124158	128.7 to 146.3 feet	Key Note Segment		5 ft	88			
124159	154.9 to 172.3 feet	Key Note Segment		5 ft	87			
124126	155.1 to 156.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
124141	174.0 to 175.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
124142	175.3 to 178.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
124143	178.3 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	253	SF	$120	**$30,300**
124144	228.8 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
124160	233.2 to 251.1 feet	Key Note Segment		5 ft	90			
124145	253.5 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
124146	261.6 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$13,020**
124161	284.2 to 302.2 feet	Key Note Segment		5 ft	90			
124128	302.4 to 303.4 feet	**Vertical Change**	.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071421	ADANAC WAY	DOMINGUEZ DR	JESSE DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124147	305.7 to 306.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
124148	310.3 to 336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
124162	336.2 to 354.8 feet	Key Note Segment		5 ft	93			
124129	352.3 to 353.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
124149	357.1 to 361.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
124163	363.3 to 381.3 feet	Key Note Segment		5 ft	90			
124130	381.1 to 382.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
124150	383.5 to 395.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
124151	396.0 to 399.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
124152	401.1 to 413.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
124131	404.9 to 405.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
124164	413.3 to 431.3 feet	Key Note Segment		5 ft	90			
124132	418.5 to 419.5 feet	**Vertical Change**	2.63"	5 ft	5	REF		
124153	433.7 to 443.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
124154	448.4 to 450.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
124155	453.2 to 455.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: N *side of* **ADANAC WAY** *Starting at:* **DOMINGUEZ DR** **$129,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071416	ADANAC WAY	JERICHO DR	DOMINGUEZ DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124088	0.0 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
124089	16.5 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
124112	24.0 to 43.0 feet	Key Note Segment		5 ft	95			
124069	43.8 to 44.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
124090	46.9 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
124113	49.8 to 68.8 feet	Key Note Segment		5 ft	95			
124070	59.2 to 60.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
124071	69.7 to 70.7 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
124091	73.3 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
124092	79.8 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
124114	104.3 to 123.3 feet	Key Note Segment		5 ft	95			
124072	113.2 to 114.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
124073	123.8 to 124.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
124093	125.6 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
124094	130.0 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
124095	134.0 to 140.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
124096	142.8 to 157.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,820**
124115	157.5 to 177.8 feet	Key Note Segment		5 ft	102			
124075	178.1 to 179.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
124097	181.4 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
124098	202.2 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
124099	210.6 to 212.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
124116	212.7 to 231.5 feet	Key Note Segment		5 ft	94			
124076	221.9 to 222.9 feet	**Vertical Change**	.79"	5 ft	5	REF		
124100	231.8 to 232.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
124077	232.3 to 233.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
124101	238.3 to 247.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
124102	250.1 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071416	ADANAC WAY	JERICHO DR	DOMINGUEZ DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124103	254.7 to 267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
124078	266.2 to 267.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
124117	267.4 to 286.8 feet	Key Note Segment		5 ft	97			
124079	286.8 to 287.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
124104	288.7 to 296.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
124105	300.4 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
124106	312.7 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
124080	320.6 to 321.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
124118	321.4 to 340.8 feet	Key Note Segment		5 ft	97			
124081	341.1 to 342.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
124107	344.2 to 345.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
124108	346.3 to 354.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
124082	361.8 to 362.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
124109	361.8 to 372.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
124119	374.1 to 395.1 feet	Key Note Segment		5 ft	105			
124083	384.9 to 385.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
124084	399.8 to 400.8 feet	**Vertical Change**	-.76"	5 ft	5	REF		
124110	400.8 to 415.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
124085	404.8 to 405.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
124086	416.7 to 417.7 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
124111	419.7 to 423.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
124087	420.4 to 421.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ADANAC WAY** *Starting at:* **JERICHO DR** **$115,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071358	ADANAC WAY	JERICHO DR	ADANAC CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123985	0.3 to 26.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,540**
123986	30.3 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
123979	38.4 to 39.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
123980	46.5 to 50.5 feet	**Vertical Change**	.3"	5 ft	20	REF		
123988	50.0 to 69.8 feet	Key Note Segment		5 ft	99			
123981	52.2 to 53.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
123982	56.1 to 57.1 feet	**Vertical Change**	2.59"	5 ft	5	REF		
123983	58.8 to 59.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
123989	78.8 to 99.9 feet	Key Note Segment		5 ft	106			
123984	78.9 to 79.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
123987	131.3 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **ADANAC WAY** *Starting at:* **JERICHO DR** **$26,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071326	ADANAC WAY	JESSE DR	1205 ADANAC WAY	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123724	0.0 to 18.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	73	SF	$120	**$8,784**
123725	20.3 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
123722	21.6 to 22.6 feet	**Vertical Change**	.32"	4 ft	4	REF		
123731	22.8 to 39.2 feet	Key Note Segment		4 ft	66			
123726	40.9 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	126	SF	$120	**$15,072**
123732	73.2 to 90.3 feet	Key Note Segment		4 ft	68			
123727	92.7 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
123728	102.8 to 111.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
123729	113.3 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
123723	118.0 to 119.0 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
123730	120.3 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**

TOTAL COST FOR: N *side of* **ADANAC WAY** *Starting at:* **JESSE DR** **$35,676.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071343	ADANAC WAY	JESSE DR	JERICHO DR	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123861	1.1 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,832**
123862	7.7 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
123863	21.8 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
123864	27.8 to 31.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
123815	40.6 to 41.6 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
123816	55.9 to 56.9 feet	**Vertical Change**	.35"	4 ft	4	REF		
123865	56.8 to 69.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,144**
123939	65.2 to 66.2 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
123931	71.8 to 89.8 feet	Key Note Segment		4 ft	72			
123817	72.4 to 73.4 feet	**Vertical Change**	.28"	4 ft	4	REF		
123818	108.7 to 109.7 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
123866	110.8 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
123932	125.2 to 143.1 feet	Key Note Segment		4 ft	72			
123819	130.5 to 131.5 feet	**Vertical Change**	-.28"	4 ft	4	REF		
123820	149.3 to 150.3 feet	**Vertical Change**	-.33"	4 ft	4	LF	$75	**$300**
123933	150.4 to 168.2 feet	Key Note Segment		4 ft	71			
123822	156.4 to 157.4 feet	**Vertical Change**	2.12"	4 ft	4	REF		
123823	158.2 to 159.2 feet	**Vertical Change**	3.54"	4 ft	4	REF		
123824	161.4 to 162.4 feet	**Vertical Change**	.32"	4 ft	4	REF		
123867	169.5 to 174.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,352**
123825	171.9 to 172.9 feet	**Vertical Change**	3.38"	4 ft	4	REF		
123826	176.8 to 177.8 feet	**Vertical Change**	3.21"	4 ft	4	SF	$75	**$300**
123868	177.9 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	48	SF	$120	**$5,712**
123827	178.7 to 179.7 feet	**Vertical Change**	.31"	4 ft	4	REF		
123869	189.8 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,960**
123870	209.4 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
123871	219.2 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,224**
123934	229.1 to 246.7 feet	Key Note Segment		4 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071343	ADANAC WAY	JESSE DR	JERICHO DR	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123828	252.2 to 253.2 feet	Vertical Change	.85"	4 ft	4	SF	$75	$300
123872	260.3 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
123873	268.4 to 280.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	$5,568
123935	280.0 to 299.4 feet	Key Note Segment		4 ft	78			
123874	301.3 to 304.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	$1,440
123875	307.6 to 318.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	44	SF	$120	$5,328
123876	318.8 to 319.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
123877	320.8 to 323.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	$1,440
123878	326.3 to 331.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,592
123936	332.0 to 350.3 feet	Key Note Segment		4 ft	73			
123829	333.2 to 334.2 feet	Vertical Change	.47"	4 ft	4	REF		
123879	376.5 to 380.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	$2,064
123937	385.2 to 402.9 feet	Key Note Segment		4 ft	71			
123830	403.2 to 404.2 feet	Vertical Change	-.5"	4 ft	4	REF		
123880	419.3 to 426.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	$3,264
123881	432.3 to 437.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	$2,256
123882	440.8 to 447.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	$3,360
123883	448.3 to 454.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	$2,928
123831	464.0 to 465.0 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
123884	467.6 to 468.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$528
123832	468.5 to 469.5 feet	Vertical Change	.76"	4 ft	4	REF		
123885	469.6 to 475.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	$2,640
123833	473.1 to 474.1 feet	Vertical Change	3.23"	4 ft	4	REF		
123886	479.5 to 483.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	$1,824
123887	494.6 to 524.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	121	SF	$120	$14,496
123835	501.2 to 502.2 feet	Vertical Change	-1.08"	4 ft	4	REF		
123836	508.9 to 509.9 feet	Vertical Change	.54"	4 ft	4	REF		
123837	513.0 to 514.0 feet	Vertical Change	.44"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071343	ADANAC WAY	JESSE DR	JERICHO DR	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123838	524.2 to 525.2 feet	Vertical Change	-.26"	4 ft	4	REF		
123888	527.5 to 533.3 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	23	SF	$120	$2,784
123839	529.7 to 530.7 feet	Vertical Change	.26"	4 ft	4	REF		
123840	532.3 to 533.3 feet	Vertical Change	-.83"	4 ft	4	REF		
123841	536.3 to 537.3 feet	Vertical Change	-.26"	4 ft	4	REF		
123889	536.5 to 538.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	$864
123890	538.3 to 540.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	$864
123842	538.6 to 539.6 feet	Vertical Change	.39"	4 ft	4	REF		
123891	551.5 to 554.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
123892	554.0 to 563.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	38	SF	$120	$4,512
123843	560.6 to 561.6 feet	Vertical Change	.3"	4 ft	4	LF	$75	$300
123893	565.5 to 567.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	$1,008
123894	569.8 to 572.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	$1,296
123895	573.8 to 575.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$720
123896	581.6 to 583.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	$1,056
123897	584.5 to 598.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	55	SF	$120	$6,624
123844	592.1 to 593.1 feet	Vertical Change	-.26"	4 ft	4	REF		
123898	599.3 to 610.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	$5,520
123899	615.6 to 622.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,456
123900	626.3 to 629.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	$1,488
123901	633.0 to 645.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	$6,144
123902	649.4 to 651.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	$1,056
123903	651.8 to 658.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	$3,360
123938	660.7 to 677.8 feet	Key Note Segment		4 ft	68			
123846	662.4 to 663.4 feet	Vertical Change	3.52"	4 ft	4	REF		
123847	677.0 to 678.0 feet	Vertical Change	2.55"	4 ft	4	REF		
123904	677.8 to 681.3 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	14	SF	$40	$560
123849	681.8 to 685.1 feet	Vertical Change	3.36"	4 ft	13	SF	$75	$990

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071343	ADANAC WAY	JESSE DR	JERICHO DR	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123905	685.4 to 692.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	**$3,312**
123850	686.0 to 687.0 feet	**Vertical Change**	.27"	4 ft	4	REF		
123851	692.7 to 693.7 feet	**Vertical Change**	2.42"	4 ft	4	REF		
123906	692.9 to 699.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,928**
123907	699.0 to 732.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	135	SF	$120	**$16,176**
123908	736.2 to 737.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
123909	739.0 to 741.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
123910	742.4 to 747.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
123911	748.3 to 795.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	187	SF	$120	**$22,464**
123852	769.5 to 770.5 feet	**Vertical Change**	-.34"	4 ft	4	REF		
123853	781.5 to 782.5 feet	**Vertical Change**	-.26"	4 ft	4	REF		
123912	797.6 to 805.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,984**
123854	804.6 to 805.6 feet	**Vertical Change**	3.49"	4 ft	4	REF		
123855	806.9 to 807.9 feet	**Vertical Change**	-.31"	4 ft	4	REF		
123913	807.2 to 808.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$768**
123914	811.5 to 824.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	51	SF	$120	**$6,144**
123915	825.2 to 829.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
123856	831.5 to 832.5 feet	**Vertical Change**	-.36"	4 ft	4	LF	$75	**$300**
123916	833.7 to 840.9 feet	Cross Slope (PAR)	8.0-9.0%	4 ft	29	SF	$120	**$3,456**
123917	841.2 to 842.6 feet	Cross Slope (PAR)	10.0-11.0%	4 ft	6	SF	$120	**$672**
123941	842.7 to 844.0 feet		5.0-6.0%	4 ft	5			
123858	843.6 to 844.6 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**
123918	847.8 to 849.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
123919	850.5 to 856.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
123859	861.8 to 862.8 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
123920	863.9 to 865.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
123940	865.3 to 866.3 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
123860	868.3 to 869.3 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071343	ADANAC WAY	JESSE DR	JERICHO DR	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123921	870.0 to 873.0 feet	Cross Slope (PAR)	>15.0%	4 ft	12	SF	$120	**$1,440**
123922	876.1 to 878.8 feet	Cross Slope (PAR)	8.0-9.0%	4 ft	11	SF	$120	**$1,296**
123923	879.8 to 880.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$480**
123924	881.9 to 890.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,984**
123925	893.1 to 894.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
123926	897.8 to 900.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
123927	900.9 to 902.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
123928	904.3 to 914.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
123929	918.7 to 923.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
123930	947.0 to 950.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **ADANAC WAY** *Starting at:* **JESSE DR** **$228,632.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071412	ADANAC WAY	MADISON DR	JERICHO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124046	15.2 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
124047	24.7 to 25.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
124048	27.8 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
124049	36.3 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
124062	54.4 to 73.0 feet	Key Note Segment		5 ft	93			
124036	54.8 to 55.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
124050	74.8 to 76.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
124063	79.3 to 99.9 feet	Key Note Segment		5 ft	103			
124051	107.7 to 128.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,300**
124064	130.7 to 151.7 feet	Key Note Segment		5 ft	105			
124038	131.2 to 132.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
124039	152.3 to 153.3 feet	**Vertical Change**	.68"	5 ft	5	REF		
124052	155.3 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
124040	168.2 to 169.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124041	173.9 to 174.9 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
124065	182.4 to 204.0 feet	Key Note Segment		5 ft	108			
124053	207.6 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
124054	223.1 to 226.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
124055	228.6 to 233.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
124066	234.8 to 255.3 feet	Key Note Segment		5 ft	103			
124056	256.7 to 261.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
124057	261.4 to 298.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,500**
124042	287.0 to 288.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
124058	298.9 to 306.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
124059	307.1 to 312.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
124067	312.9 to 331.5 feet	Key Note Segment		5 ft	93			
124044	324.1 to 325.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
124060	335.3 to 338.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071412	ADANAC WAY	MADISON DR	JERICHO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124068	338.4 to 358.6 feet	Key Note Segment		5 ft	101			
124045	338.7 to 339.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
124061	363.0 to 383.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**

TOTAL COST FOR: N *side of* **ADANAC WAY** *Starting at:* **MADISON DR** **$97,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101430	ADELAIDE AVE	517 ADELAIDE AVE	CANAL ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56815	2.8 to 3.8 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
56855	3.1 to 15.7 feet	Key Note Segment		5 ft	63			
56816	15.9 to 16.9 feet	Vertical Change	.33"	5 ft	5	REF		
56827	19.3 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,780
56817	24.7 to 25.7 feet	Vertical Change	-.26"	5 ft	5	REF		
56828	37.2 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
56856	46.5 to 55.8 feet	Key Note Segment		5 ft	47			
56829	55.8 to 87.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	159	SF	$40	$6,360
56818	69.5 to 70.5 feet	Vertical Change	-.55"	5 ft	5	REF		
56857	87.8 to 99.3 feet	Key Note Segment		5 ft	58			
56819	95.0 to 96.0 feet	Vertical Change	.3"	5 ft	5	REF		
56830	102.3 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
56831	104.4 to 107.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
56832	108.3 to 111.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
56833	118.3 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
56858	131.4 to 140.4 feet	Key Note Segment		5 ft	45			
56834	140.4 to 141.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$280
56835	142.1 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
56836	152.2 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,560
56837	178.4 to 179.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
56820	188.8 to 189.8 feet	Vertical Change	2.3"	5 ft	5	REF		
56838	189.0 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
56863	193.8 to 195.3 feet		5.0-6.0%	5 ft	8			
56859	197.3 to 206.3 feet	Key Note Segment		5 ft	45			
56839	206.3 to 217.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	58	SF	$40	$2,320
56821	206.6 to 207.6 feet	Vertical Change	.36"	5 ft	5	REF		
56822	212.4 to 213.4 feet	Vertical Change	.27"	5 ft	5	REF		
56860	218.8 to 227.8 feet	Key Note Segment		5 ft	45			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101430	ADELAIDE AVE	517 ADELAIDE AVE	CANAL ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56840	229.6 to 236.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56841	250.7 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
56823	252.9 to 253.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56861	257.8 to 267.3 feet	Key Note Segment		5 ft	48			
56842	267.3 to 274.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	38	SF	$40	**$1,500**
56843	276.5 to 279.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
56824	284.8 to 285.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
56844	288.3 to 289.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$660**
56845	289.8 to 290.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
56846	293.3 to 295.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
56847	296.7 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
56848	304.3 to 305.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56862	305.4 to 323.4 feet	Key Note Segment		5 ft	90			
56849	323.6 to 345.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,140**
56850	346.3 to 352.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
56851	361.7 to 362.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56852	381.5 to 396.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
56853	403.5 to 414.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
56854	415.5 to 427.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
56826	419.8 to 420.8 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **ADELAIDE AVE** *Starting at:* **517 ADELAIDE AVE** **$107,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101400	ADELAIDE AVE	636 ADELAIDE AVE	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56560	0.0 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
56561	4.2 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
56562	19.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
56563	25.8 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,100**
56536	36.6 to 37.6 feet	**Vertical Change**	1.84"	5 ft	5	REF		
56564	43.3 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
56565	48.3 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
56566	67.1 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56614	69.3 to 87.3 feet	Key Note Segment		5 ft	90			
56567	89.5 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
56568	100.3 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
56537	103.0 to 104.0 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
56569	106.3 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
56615	121.0 to 132.8 feet	Key Note Segment		5 ft	59			
56538	131.5 to 132.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
56570	132.8 to 146.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	66	SF	$40	**$2,640**
56539	134.6 to 135.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
56571	146.8 to 152.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
56572	160.4 to 178.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
56573	182.3 to 187.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
56574	187.3 to 188.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
56575	193.3 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
56616	194.9 to 205.3 feet	Key Note Segment		5 ft	52			
56576	205.3 to 208.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
56577	208.9 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
56578	220.9 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56617	227.2 to 243.9 feet	Key Note Segment		5 ft	84			
56579	243.9 to 251.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	39	SF	$40	**$1,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101400	ADELAIDE AVE	636 ADELAIDE AVE	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56580	251.6 to 252.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
56581	253.5 to 268.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
56540	262.9 to 263.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
56618	269.6 to 283.8 feet	Key Note Segment		5 ft	71			
56541	270.2 to 271.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
56582	291.8 to 293.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56619	297.8 to 307.7 feet	Key Note Segment		5 ft	50			
56543	298.6 to 299.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
56583	307.7 to 315.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
56544	307.8 to 308.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
56545	313.9 to 314.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
56584	315.3 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
56546	320.3 to 321.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
56585	324.0 to 325.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56586	333.2 to 336.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
56620	336.6 to 348.3 feet	Key Note Segment		5 ft	59			
56587	348.6 to 350.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
56588	353.2 to 355.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
56621	366.1 to 375.6 feet	Key Note Segment		5 ft	48			
56589	375.6 to 380.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
56590	380.3 to 383.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
56622	383.3 to 397.2 feet	Key Note Segment		5 ft	70			
56591	397.2 to 407.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	52	SF	$40	**$2,060**
56592	407.8 to 409.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
56593	409.0 to 424.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
56623	424.6 to 435.9 feet	Key Note Segment		5 ft	57			
56594	446.8 to 466.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
56624	468.4 to 480.6 feet	Key Note Segment		5 ft	61			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101400	ADELAIDE AVE	636 ADELAIDE AVE	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56549	481.1 to 482.1 feet	Vertical Change	.26"	5 ft	5	REF		
56595	482.1 to 499.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
56596	502.8 to 505.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
56597	508.5 to 514.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
56625	519.9 to 529.3 feet	Key Note Segment		5 ft	47			
56550	521.0 to 522.0 feet	Vertical Change	.27"	5 ft	5	REF		
56551	522.8 to 523.8 feet	Vertical Change	1.83"	5 ft	5	REF		
56598	542.1 to 543.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$1,020
56552	545.3 to 546.3 feet	Vertical Change	1.6"	5 ft	5	SF	$75	$375
56599	550.7 to 551.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
56600	553.0 to 554.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
56601	554.0 to 557.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	$1,860
56553	554.4 to 555.4 feet	Vertical Change	.26"	5 ft	5	REF		
56554	556.5 to 557.5 feet	Vertical Change	-.39"	5 ft	5	REF		
56602	560.6 to 563.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,620
56555	564.3 to 565.3 feet	Vertical Change	-1.72"	5 ft	5	SF	$75	$375
56628	565.0 to 566.2 feet		5.0-6.0%	5 ft	6			
56603	571.8 to 578.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
56626	581.8 to 596.1 feet	Key Note Segment		5 ft	72			
56556	596.3 to 597.3 feet	Vertical Change	.65"	5 ft	5	REF		
56629	596.6 to 598.7 feet		7.0-8.0%	5 ft	11			
56630	596.6 to 598.7 feet	Running Slope	7.0-8.0%	5 ft	11	SF	$120	$1,260
56557	600.7 to 601.7 feet	Vertical Change	-2.58"	5 ft	5	SF	$75	$375
56604	606.1 to 607.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
56605	610.3 to 611.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
56606	612.7 to 634.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	$12,900
56607	634.3 to 646.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,440
56627	646.7 to 674.1 feet	Key Note Segment		5 ft	137			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101400	ADELAIDE AVE	636 ADELAIDE AVE	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56608	675.6 to 693.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
56558	688.1 to 689.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
56559	690.5 to 691.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56609	695.8 to 707.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
56610	707.8 to 728.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
56611	730.2 to 734.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
56612	735.2 to 756.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
56613	756.1 to 757.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: SW *side of* **ADELAIDE AVE** *Starting at:* **636 ADELAIDE AVE** **$219,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101410	ADELAIDE AVE	678 ADELAIDE AVE	SAWMILL ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56695	0.0 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
56696	21.4 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
56697	27.8 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
56698	35.7 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,380**
56699	50.8 to 57.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
56700	61.3 to 138.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	384	SF	$120	**$46,080**
56692	94.1 to 95.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
56693	100.3 to 101.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
56694	110.1 to 111.1 feet	**Vertical Change**	1.85"	5 ft	5	REF		
56701	138.1 to 145.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,260**
56702	145.2 to 150.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,300**
56703	150.7 to 154.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
56704	154.9 to 159.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
56705	161.5 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
56706	165.4 to 169.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: NE *side of* **ADELAIDE AVE** *Starting at:* **678 ADELAIDE AVE** **$90,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101353	ADELAIDE AVE	CANAL ST	636 ADELAIDE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56450	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
56451	3.0 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,840**
56428	13.8 to 14.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
56429	22.3 to 23.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
56452	38.2 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,100**
56430	39.6 to 40.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
56453	52.3 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$20,940**
56454	90.0 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
56455	97.8 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
56456	108.1 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
56535	120.1 to 121.7 feet		5.0-6.0%	5 ft	8			
56513	122.7 to 135.1 feet	Key Note Segment		5 ft	62			
56431	123.8 to 124.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
56457	137.1 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
56432	143.2 to 144.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
56458	153.3 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
56459	160.9 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
56514	163.7 to 174.3 feet	Key Note Segment		5 ft	53			
56460	174.3 to 175.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
56433	182.5 to 183.5 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
56461	184.3 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
56515	189.8 to 207.4 feet	Key Note Segment		5 ft	88			
56462	208.4 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
56516	224.3 to 245.8 feet	Key Note Segment		5 ft	108			
56463	246.3 to 248.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
56464	248.6 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
56434	255.7 to 256.7 feet	**Vertical Change**	.78"	5 ft	5	REF		
56465	263.1 to 265.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101353	ADELAIDE AVE	CANAL ST	636 ADELAIDE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56466	267.8 to 270.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
56467	275.3 to 280.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
56468	281.3 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
56517	289.5 to 315.3 feet	Key Note Segment		5 ft	129			
56469	317.0 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
56435	323.6 to 324.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
56518	339.0 to 359.8 feet	Key Note Segment		5 ft	104			
56470	360.8 to 372.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
56471	377.1 to 389.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
56436	378.6 to 379.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
56437	383.3 to 386.7 feet	**Vertical Change**	-.29"	5 ft	17	REF		
56472	389.3 to 399.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
56438	389.7 to 390.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
56439	393.5 to 394.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
56519	400.3 to 423.4 feet	Key Note Segment		5 ft	116			
56440	400.6 to 401.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
56473	423.4 to 427.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
56474	427.8 to 429.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
56441	431.0 to 432.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
56475	432.0 to 433.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
56476	441.4 to 446.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
56477	446.9 to 449.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
56478	452.2 to 476.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
56520	477.1 to 488.6 feet	Key Note Segment		5 ft	58			
56479	488.7 to 503.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	73	SF	$40	**$2,900**
56521	512.8 to 524.3 feet	Key Note Segment		5 ft	58			
56442	524.2 to 525.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
56480	528.3 to 530.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101353	ADELAIDE AVE	CANAL ST	636 ADELAIDE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56481	541.4 to 552.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
56522	552.5 to 563.6 feet	Key Note Segment		5 ft	56			
56482	563.6 to 566.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
56483	571.3 to 573.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
56443	578.3 to 579.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
56484	581.6 to 589.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
56485	594.2 to 603.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
56523	608.6 to 625.9 feet	Key Note Segment		5 ft	87			
56486	628.8 to 657.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
56524	657.0 to 676.3 feet	Key Note Segment		5 ft	97			
56487	676.5 to 678.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$460**
56488	687.9 to 693.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
56489	697.0 to 700.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
56525	700.8 to 712.1 feet	Key Note Segment		5 ft	57			
56444	711.8 to 712.8 feet	**Vertical Change**	.8"	5 ft	5	REF		
56490	712.9 to 722.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
56491	724.6 to 730.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
56492	744.8 to 745.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56526	751.5 to 758.0 feet	Key Note Segment		5 ft	33			
56493	758.1 to 759.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
56494	771.5 to 782.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
56495	785.0 to 790.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
56496	790.7 to 799.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
56497	802.0 to 803.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56527	804.9 to 814.4 feet	Key Note Segment		5 ft	48			
56498	815.4 to 834.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
56499	835.3 to 839.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56528	840.4 to 849.4 feet	Key Note Segment		5 ft	45			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101353	ADELAIDE AVE	CANAL ST	636 ADELAIDE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56445	842.3 to 843.3 feet	Vertical Change	-.33"	5 ft	5	REF		
56500	849.4 to 857.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	41	SF	$40	**$1,640**
56501	858.7 to 865.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
56502	865.8 to 869.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
56529	870.3 to 882.2 feet	Key Note Segment		5 ft	60			
56446	882.0 to 883.0 feet	Vertical Change	.26"	5 ft	5	REF		
56503	882.2 to 898.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	81	SF	$40	**$3,220**
56504	898.3 to 904.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
56530	931.7 to 940.8 feet	Key Note Segment		5 ft	46			
56531	945.8 to 968.0 feet	Key Note Segment		5 ft	111			
56447	967.9 to 968.9 feet	Vertical Change	-.36"	5 ft	5	REF		
56505	968.8 to 975.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56532	975.8 to 1002.6 feet	Key Note Segment		5 ft	134			
56506	1007.7 to 1010.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
56507	1013.3 to 1022.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
56533	1022.6 to 1036.1 feet	Key Note Segment		5 ft	67			
56508	1037.3 to 1045.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
56534	1045.3 to 1058.7 feet	Key Note Segment		5 ft	67			
56449	1045.9 to 1046.9 feet	Vertical Change	-.34"	5 ft	5	REF		
56509	1059.4 to 1064.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	**$1,080**
56510	1067.8 to 1069.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
56511	1071.1 to 1086.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
56512	1092.5 to 1108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**

TOTAL COST FOR: SW *side of* **ADELAIDE AVE** *Starting at:* **CANAL ST** **$298,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101426	ADELAIDE AVE	SAWMILL ST	519 ADELAIDE AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56789	0.8 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56790	4.8 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
56791	29.7 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	219	SF	$120	**$26,220**
56792	74.8 to 76.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
56793	78.8 to 88.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
56794	88.3 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
56795	96.6 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
56796	104.4 to 117.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
56783	110.8 to 111.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56810	118.2 to 142.0 feet	Key Note Segment		5 ft	119			
56797	142.0 to 143.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
56798	143.8 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
56799	155.5 to 157.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
56784	161.7 to 162.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
56811	168.3 to 185.9 feet	Key Note Segment		5 ft	88			
56800	185.9 to 188.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
56801	188.7 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
56802	211.3 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
56785	222.8 to 223.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
56803	226.2 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
56812	233.9 to 244.5 feet	Key Note Segment		5 ft	53			
56786	249.2 to 250.2 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
56787	254.2 to 255.2 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
56804	257.2 to 260.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
56805	265.0 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
56813	269.9 to 290.5 feet	Key Note Segment		5 ft	103			
56788	285.1 to 286.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
56814	298.7 to 316.9 feet	Key Note Segment		5 ft	91			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101426	ADELAIDE AVE	SAWMILL ST	519 ADELAIDE AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56806	317.9 to 319.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
56807	324.5 to 336.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
56808	341.5 to 347.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
56809	361.3 to 362.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: NE *side of* **ADELAIDE AVE** *Starting at:* **SAWMILL ST** **$91,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101407	ADELAIDE AVE	SUNRISE AVE	701 ADELAIDE AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56643	0.0 to 19.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
56631	1.2 to 2.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
56632	7.6 to 8.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
56644	20.1 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
56633	22.8 to 23.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
56645	34.6 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
56646	49.1 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
56634	52.7 to 53.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56683	63.3 to 86.9 feet	Key Note Segment		5 ft	118			
56647	91.1 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
56635	95.5 to 96.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
56691	98.6 to 99.8 feet		5.0-6.0%	5 ft	6			
56684	100.8 to 116.4 feet	Key Note Segment		5 ft	78			
56636	101.1 to 102.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56648	117.1 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56649	122.9 to 133.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
56650	133.3 to 153.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,820**
56651	153.0 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
56652	162.0 to 163.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
56685	163.4 to 179.1 feet	Key Note Segment		5 ft	79			
56653	179.1 to 190.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,200**
56686	190.1 to 205.7 feet	Key Note Segment		5 ft	78			
56654	209.7 to 243.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
56637	218.2 to 219.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
56687	254.0 to 269.8 feet	Key Note Segment		5 ft	79			
56655	269.8 to 279.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
56688	279.3 to 295.4 feet	Key Note Segment		5 ft	80			
56656	295.8 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101407	ADELAIDE AVE	SUNRISE AVE	701 ADELAIDE AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56657	306.0 to 308.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
56658	312.2 to 320.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
56638	319.9 to 320.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
56659	325.8 to 328.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
56660	335.8 to 343.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
56689	343.1 to 360.1 feet	Key Note Segment		5 ft	85			
56661	365.3 to 369.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56690	370.1 to 385.8 feet	Key Note Segment		5 ft	79			
56639	370.3 to 371.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
56662	386.6 to 387.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56640	400.8 to 401.8 feet	**Vertical Change**	-1.25"	5 ft	5	SF	$75	**$375**
56663	411.9 to 413.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56664	414.8 to 418.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
56665	418.8 to 424.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
56666	425.5 to 439.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
56667	448.3 to 460.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
56668	467.0 to 471.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
56669	476.3 to 477.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56670	483.8 to 498.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
56671	506.5 to 523.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
56672	525.7 to 537.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
56673	543.3 to 544.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56674	557.2 to 629.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	359	SF	$120	**$43,080**
56641	558.4 to 559.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
56675	632.1 to 635.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
56676	640.8 to 655.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
56677	659.8 to 666.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56678	670.4 to 676.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101407	ADELAIDE AVE	SUNRISE AVE	701 ADELAIDE AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56679	681.0 to 711.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,120**
56680	713.3 to 720.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
56681	721.5 to 741.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
56682	741.7 to 743.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
56642	742.6 to 743.6 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **ADELAIDE AVE** *Starting at:* **SUNRISE AVE** **$248,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311119	ADELL ST	100 ADELL ST	100 ADELL ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114475	27.3 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
114476	35.9 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
114472	47.3 to 48.3 feet	**Vertical Change**	.98"	5 ft	5	REF		
114477	53.8 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
114478	65.3 to 76.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
114473	73.6 to 74.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
114479	77.3 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
114480	84.5 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
114481	94.2 to 125.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,480**
114474	105.9 to 106.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
114482	125.0 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
114483	148.3 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
114484	155.7 to 157.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **ADELL ST** *Starting at:* **100 ADELL ST** **$61,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311121	ADELL ST	100 ADELL ST	SONORA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114486	0.5 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
114487	4.8 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
114488	14.1 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,420**
114489	40.0 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
114490	52.0 to 78.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
114491	90.9 to 105.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
114492	108.0 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
114493	111.2 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
114494	115.9 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
114485	116.2 to 117.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
114495	132.7 to 134.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
114496	137.5 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114497	142.3 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**

TOTAL COST FOR: S *side of* **ADELL ST** *Starting at:* **100 ADELL ST** **$64,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311319	ADELL ST	101 ADELL ST	101 ADELL ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115383	1.2 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
115380	6.3 to 7.3 feet	**Vertical Change**	-.52"	5 ft	5	REF		
115381	23.9 to 24.9 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
115384	27.8 to 29.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
115382	29.4 to 30.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
115385	29.8 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
115386	56.6 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**

TOTAL COST FOR: N *side of* **ADELL ST** *Starting at:* **101 ADELL ST** **$41,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311325	ADELL ST	102 ADELL ST	26339 ADELL ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115403	2.5 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
115404	5.8 to 9.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
115405	10.4 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
115406	23.9 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
115387	41.6 to 42.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
115407	41.7 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
115408	45.1 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
115409	46.7 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
115388	46.8 to 47.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
115410	53.3 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
115389	59.5 to 60.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
115411	80.7 to 85.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
115440	85.2 to 111.1 feet	Key Note Segment		5 ft	130			
115390	85.6 to 86.6 feet	**Vertical Change**	-.82"	5 ft	5	REF		
115412	115.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
115413	120.3 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
115414	132.7 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
115391	157.4 to 158.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
115415	158.1 to 159.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
115392	180.5 to 181.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
115416	198.8 to 199.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
115417	223.7 to 226.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
115418	229.1 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115419	252.4 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115420	287.3 to 291.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
115421	297.3 to 302.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
115422	313.8 to 320.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
115393	320.4 to 321.4 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311325	ADELL ST	102 ADELL ST	26339 ADELL ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115423	337.1 to 371.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
115394	346.2 to 347.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
115395	372.1 to 373.1 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
115396	385.0 to 386.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
115424	393.3 to 397.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
115425	401.4 to 405.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
115441	407.4 to 433.7 feet	Key Note Segment		5 ft	132			
115426	433.9 to 443.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
115427	448.3 to 464.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
115428	473.2 to 481.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
115397	478.5 to 479.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
115429	484.6 to 485.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
115398	502.1 to 503.1 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
115430	507.4 to 508.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115431	521.1 to 531.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,420**
115399	532.7 to 533.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
115432	537.8 to 541.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
115400	545.6 to 546.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
115433	566.3 to 570.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
115442	570.8 to 596.5 feet	Key Note Segment		5 ft	129			
115434	612.6 to 614.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115435	618.3 to 623.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
115401	623.1 to 624.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
115436	641.3 to 653.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
115437	704.1 to 725.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
115438	726.8 to 731.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
115402	730.8 to 731.8 feet	**Vertical Change**	.59"	5 ft	5	REF		
115439	738.7 to 743.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311325	ADELL ST	102 ADELL ST	26339 ADELL ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **ADELL ST**	*Starting at:* **102 ADELL ST**					**$156,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021258	ADELL ST	26988 E ADELL ST	N LAKE ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117997	0.0 to 1.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
117998	5.1 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
117999	10.0 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
117993	11.4 to 12.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
117994	15.6 to 16.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
118000	19.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
118002	24.8 to 25.8 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
117995	25.3 to 26.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
118001	26.5 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
117996	39.3 to 40.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ADELL ST** *Starting at:* **26988 E ADELL ST** **$19,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021254	ADELL ST	LAKE ST.	1807 LAKE ST.	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117985	6.3 to 7.3 feet	Vertical Change	-.37"	5 ft	5	LF	$75	**$375**
117987	9.3 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
117988	12.0 to 13.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
117989	16.3 to 17.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
117990	17.9 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117986	27.1 to 28.1 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
117991	41.6 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
117992	51.7 to 52.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **ADELL ST** *Starting at:* **LAKE ST.** **$6,330.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311243	ADELL ST	SONORA ST	N D ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115139	0.8 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
115140	9.2 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
115180	28.3 to 43.8 feet	Key Note Segment		5 ft	78			
115141	43.8 to 53.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	49	SF	$40	**$1,940**
115181	53.8 to 69.8 feet	Key Note Segment		5 ft	80			
115142	69.8 to 72.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
115124	70.5 to 71.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
115143	72.7 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
115144	87.9 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
115145	99.5 to 128.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
115146	131.8 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
115182	134.4 to 149.4 feet	Key Note Segment		5 ft	75			
115147	150.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115148	153.8 to 155.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
115149	156.2 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
115183	159.8 to 175.3 feet	Key Note Segment		5 ft	77			
115150	192.1 to 194.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
115151	196.7 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
115152	224.1 to 227.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
115153	230.8 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
115184	240.0 to 255.8 feet	Key Note Segment		5 ft	79			
115154	260.7 to 262.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
115185	265.8 to 281.9 feet	Key Note Segment		5 ft	80			
115155	281.9 to 286.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$980**
115156	287.3 to 290.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
115125	294.6 to 295.6 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
115157	299.7 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
115158	306.8 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311243	ADELL ST	SONORA ST	N D ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115126	327.3 to 328.3 feet	Vertical Change	.69"	5 ft	5	REF		
115127	333.8 to 334.8 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
115159	337.5 to 345.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
115186	346.1 to 361.3 feet	Key Note Segment		5 ft	76			
115160	361.7 to 363.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
115161	365.8 to 371.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,420
115187	372.2 to 387.2 feet	Key Note Segment		5 ft	75			
115128	372.7 to 373.7 feet	Vertical Change	.49"	5 ft	5	REF		
115162	387.3 to 389.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
115163	391.5 to 393.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
115129	394.7 to 395.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
115195	399.1 to 400.1 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
115164	400.6 to 401.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
115130	401.3 to 402.3 feet	Vertical Change	.29"	5 ft	5	REF		
115165	405.0 to 413.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,860
115131	406.5 to 407.5 feet	Vertical Change	-.26"	5 ft	5	REF		
115132	410.4 to 413.5 feet	Vertical Change	.27"	5 ft	16	REF		
115198	412.2 to 413.4 feet		5.0-6.0%	5 ft	6			
115166	416.0 to 423.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
115196	434.8 to 435.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
115167	437.9 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$8,040
115133	440.1 to 441.1 feet	Vertical Change	-.41"	5 ft	5	REF		
115188	452.7 to 468.7 feet	Key Note Segment		5 ft	80			
115134	453.1 to 454.1 feet	Vertical Change	-.27"	5 ft	5	REF		
115168	468.7 to 478.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	$1,980
115189	478.9 to 494.5 feet	Key Note Segment		5 ft	78			
115169	494.5 to 518.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	119	SF	$40	$4,760
115135	498.5 to 499.5 feet	Vertical Change	.74"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311243	ADELL ST	SONORA ST	N D ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115190	531.3 to 547.0 feet	Key Note Segment		5 ft	79			
115170	547.0 to 549.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	$460
115171	550.8 to 579.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	$17,100
115172	579.4 to 607.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	$16,860
115191	607.5 to 623.2 feet	Key Note Segment		5 ft	79			
115173	623.4 to 637.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	72	SF	$40	$2,880
115192	637.8 to 652.8 feet	Key Note Segment		5 ft	75			
115174	656.6 to 665.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
115175	669.4 to 672.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
115136	692.2 to 693.2 feet	Vertical Change	1.69"	5 ft	5	SF	$75	$375
115176	712.2 to 715.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
115137	715.8 to 716.8 feet	Vertical Change	.48"	5 ft	5	REF		
115193	717.3 to 734.4 feet	Key Note Segment		5 ft	86			
115138	742.2 to 743.2 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
115194	744.6 to 758.6 feet	Key Note Segment		5 ft	70			
115177	760.7 to 767.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,080
115178	767.5 to 772.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
115179	782.1 to 791.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340
115197	782.3 to 783.3 feet	Protruding Object	48"	5 ft	5	JOB	$99	$99

TOTAL COST FOR: S *side of* **ADELL ST** *Starting at:* **SONORA ST** **$178,212.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111445	AIRPORT DR	2871 AIRPORT DR	2871 AIRPORT DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133735	0.0 to 5.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
133736	5.6 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,920**
133722	9.9 to 10.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
133751	44.8 to 70.8 feet	Key Note Segment		5 ft	130			
133723	46.0 to 47.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
133724	66.3 to 67.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
133737	70.8 to 87.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	85	SF	$40	**$3,400**
133738	87.8 to 103.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
133726	97.7 to 98.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
133739	104.1 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
133727	106.2 to 107.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
133728	108.3 to 111.5 feet	**Vertical Change**	.35"	5 ft	16	REF		
133740	109.2 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
133741	114.1 to 135.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
133729	136.5 to 137.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133742	137.2 to 148.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
133743	151.4 to 154.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
133744	154.8 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
133745	173.9 to 201.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,740**
133730	188.1 to 189.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
133731	200.8 to 201.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
133746	205.5 to 222.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
133747	222.8 to 238.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
133752	239.4 to 261.6 feet	Key Note Segment		5 ft	111			
133748	261.8 to 265.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
133749	267.0 to 271.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
133732	270.1 to 271.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
133733	272.0 to 273.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111445	AIRPORT DR	2871 AIRPORT DR	2871 AIRPORT DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133750	273.2 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
133734	280.4 to 281.4 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **AIRPORT DR** *Starting at:* **2871 AIRPORT DR** **$120,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111438	AIRPORT DR	2900 AIRPORT DR	AVIATION DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133658	0.0 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,920**
133659	30.8 to 65.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,700**
133637	44.1 to 45.1 feet	**Vertical Change**	.84"	5 ft	5	REF		
133660	65.3 to 76.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
133638	69.8 to 70.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
133661	77.3 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
133662	92.8 to 94.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
133663	95.0 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
133664	99.8 to 130.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,600**
133639	121.0 to 122.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
133665	131.7 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
133666	145.9 to 158.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
133640	146.8 to 147.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
133667	159.3 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
133668	171.7 to 184.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
133641	184.4 to 185.4 feet	**Vertical Change**	.64"	5 ft	5	REF		
133669	186.7 to 197.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
133670	197.8 to 200.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
133642	198.2 to 199.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133671	200.3 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	335	SF	$120	**$40,200**
133643	207.6 to 208.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
133644	216.2 to 217.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
133672	270.3 to 274.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
133673	274.6 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
133674	279.0 to 296.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
133675	296.6 to 304.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
133676	304.6 to 324.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
133677	324.6 to 330.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111438	AIRPORT DR	2900 AIRPORT DR	AVIATION DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133646	330.5 to 331.5 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
133678	333.4 to 334.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
133679	334.9 to 337.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
133680	340.2 to 342.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
133647	340.4 to 341.4 feet	Vertical Change	.35"	5 ft	5	REF		
133681	343.2 to 350.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
133648	346.4 to 347.4 feet	Vertical Change	.28"	5 ft	5	REF		
133682	352.1 to 361.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	$5,880
133649	361.3 to 362.3 feet	Vertical Change	.33"	5 ft	5	REF		
133683	363.2 to 364.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
133684	366.9 to 388.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	$12,960
133685	390.9 to 396.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
133686	398.2 to 411.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
133650	401.2 to 402.2 feet	Vertical Change	.47"	5 ft	5	REF		
133687	416.6 to 446.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	$17,700
133688	446.7 to 451.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$2,940
133689	453.8 to 456.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
133690	458.8 to 465.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	$3,900
133652	464.3 to 465.3 feet	Vertical Change	3.02"	5 ft	5	REF		
133691	465.3 to 473.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
133692	475.7 to 495.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	$11,880
133693	501.3 to 507.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
133694	510.5 to 526.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,540
133695	528.3 to 537.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,280
133696	539.0 to 542.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
133697	550.1 to 560.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
133698	567.6 to 584.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	$10,200
133653	583.0 to 584.0 feet	Vertical Change	2.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111438	AIRPORT DR	2900 AIRPORT DR	AVIATION DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133699	585.3 to 590.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
133700	592.8 to 594.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
133701	596.9 to 633.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,140**
133654	625.7 to 626.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
133655	632.4 to 633.4 feet	**Vertical Change**	.78"	5 ft	5	REF		
133702	636.4 to 638.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
133703	638.7 to 644.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
133656	653.3 to 654.3 feet	**Vertical Change**	3.22"	5 ft	5	SF	$75	**$375**
133657	655.2 to 656.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
133704	663.7 to 665.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: NW *side of* **AIRPORT DR** *Starting at:* **2900 AIRPORT DR** **$337,605.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111451	AIRPORT DR	2985 AIRPORT DR	YEAGER RD	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133756	0.0 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
133757	3.0 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
133758	23.1 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
133759	25.3 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
133772	29.8 to 51.5 feet	Key Note Segment		5 ft	109			
133760	51.9 to 58.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,300**
133761	62.0 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,460**
133762	91.9 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
133763	98.9 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,740**
133764	137.5 to 151.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
133773	151.8 to 187.4 feet	Key Note Segment		5 ft	178			
133765	187.7 to 211.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
133753	209.8 to 210.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133766	214.5 to 217.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
133767	218.2 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
133768	243.3 to 269.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,840**
133769	272.1 to 287.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
133770	288.0 to 289.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
133771	294.3 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
133774	297.2 to 298.3 feet		5.0-6.0%	5 ft	6			
133755	298.3 to 299.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **AIRPORT DR** *Starting at:* **2985 AIRPORT DR** **$118,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111423	AIRPORT DR	AVE 17	3254 AIRPORT DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133523	15.1 to 16.1 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
133532	16.9 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
133533	25.5 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
133534	35.2 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
133535	60.1 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
133524	62.2 to 63.2 feet	Vertical Change	.64"	5 ft	5	REF		
133536	72.4 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
133537	83.3 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
133538	88.7 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	$17,100
133525	89.3 to 90.3 feet	Vertical Change	.29"	5 ft	5	REF		
133526	97.8 to 98.8 feet	Vertical Change	.3"	5 ft	5	REF		
133527	111.5 to 112.5 feet	Vertical Change	.29"	5 ft	5	REF		
133539	119.6 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
133540	132.4 to 175.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	214	SF	$120	$25,620
133528	146.1 to 147.1 feet	Vertical Change	-.31"	5 ft	5	REF		
133529	154.6 to 155.6 feet	Vertical Change	.34"	5 ft	5	REF		
133530	163.2 to 164.2 feet	Vertical Change	.31"	5 ft	5	REF		
133541	175.1 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
133542	181.8 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
133543	192.0 to 196.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
133531	195.2 to 196.2 feet	Vertical Change	-.72"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **AIRPORT DR** *Starting at:* **AVE 17** **$78,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111442	AIRPORT DR	AVIATION DR	2801 AIRPORT DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133710	0.0 to 5.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
133711	8.3 to 13.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
133712	14.8 to 22.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
133713	25.3 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,100**
133714	54.6 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
133715	61.7 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
133716	68.4 to 70.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
133717	70.6 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,460**
133718	111.8 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
133721	115.4 to 138.3 feet	Key Note Segment		5 ft	115			
133719	138.3 to 144.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
133720	144.3 to 146.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: SE *side of* **AIRPORT DR** *Starting at:* **AVIATION DR** **$62,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111431	AIRPORT DR	CURB RAMP	3100 AIRPORT DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133580	2.7 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
133581	9.5 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
133558	10.1 to 11.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
133559	29.6 to 30.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
133582	39.5 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133583	51.4 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
133560	55.4 to 56.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
133561	63.7 to 64.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
133584	64.5 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,780**
133562	72.1 to 73.1 feet	**Vertical Change**	.64"	5 ft	5	REF		
133563	89.2 to 90.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
133564	97.8 to 98.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
133585	109.7 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
133565	123.6 to 124.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
133586	128.1 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	223	SF	$120	**$26,760**
133566	149.2 to 150.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
133567	166.5 to 167.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
133568	174.7 to 175.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
133587	175.1 to 176.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
133588	178.7 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
133569	208.0 to 209.0 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
133589	209.4 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
133570	214.4 to 215.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133571	216.6 to 217.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
133590	221.9 to 223.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
133591	223.7 to 227.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
133592	230.1 to 253.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
133593	256.3 to 266.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111431	AIRPORT DR	CURB RAMP	3100 AIRPORT DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133594	269.5 to 277.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
133595	279.5 to 285.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
133596	288.3 to 293.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
133597	296.2 to 306.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	$6,420
133598	310.3 to 335.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	$14,880
133599	335.8 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,380
133600	359.2 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$8,940
133601	376.2 to 379.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
133602	379.9 to 387.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,380
133603	389.6 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
133604	392.8 to 394.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
133605	396.3 to 398.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
133606	402.2 to 404.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
133607	408.8 to 410.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
133608	411.6 to 427.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,300
133609	431.3 to 442.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
133572	450.3 to 451.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
133610	469.3 to 474.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
133611	480.5 to 490.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
133573	486.6 to 487.6 feet	Vertical Change	.35"	5 ft	5	REF		
133612	492.3 to 537.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	228	SF	$120	$27,360
133613	540.0 to 562.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	$13,380
133614	568.1 to 579.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	$6,840
133615	579.5 to 589.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
133616	592.0 to 595.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
133617	597.8 to 608.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
133618	610.7 to 619.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
133619	619.3 to 628.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111431	AIRPORT DR	CURB RAMP	3100 AIRPORT DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133620	630.3 to 635.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
133621	640.0 to 659.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,760
133622	662.1 to 681.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	$11,640
133623	681.5 to 727.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	228	SF	$120	$27,360
133624	727.8 to 793.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	330	SF	$120	$39,600
133575	755.2 to 756.2 feet	Vertical Change	.43"	5 ft	5	REF		
133576	761.3 to 762.3 feet	Vertical Change	.51"	5 ft	5	REF		
133577	765.1 to 766.1 feet	Vertical Change	.41"	5 ft	5	REF		
133578	771.7 to 772.7 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
133625	794.8 to 802.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
133626	805.3 to 808.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
133627	810.6 to 813.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
133628	814.3 to 822.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
133629	827.8 to 837.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	$5,940
133579	829.3 to 830.3 feet	Vertical Change	.28"	5 ft	5	REF		
133630	839.9 to 859.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	$11,640
133631	862.5 to 865.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
133632	868.9 to 871.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
133633	872.8 to 874.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
133634	878.3 to 881.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
133635	885.5 to 892.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,080
133636	892.3 to 898.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960

TOTAL COST FOR: W *side of* **AIRPORT DR** *Starting at:* **CURB RAMP** **$423,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111425	AIRPORT DR	PARKING LOT ENTRANCE	CURB RAMP	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133548	0.0 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
133549	16.3 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,340**
133544	31.5 to 32.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
133550	57.3 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
133551	77.2 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
133545	90.8 to 91.8 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
133552	94.0 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
133553	98.6 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$19,980**
133546	125.1 to 126.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
133554	139.3 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
133555	145.5 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
133556	158.4 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
133547	159.4 to 160.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
133557	179.6 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: W *side of* **AIRPORT DR** *Starting at:* **PARKING LOT ENTRANCE** **$81,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041431	ALDERWOOD CT	2358 ALDERWOOD CT	N SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121797	2.8 to 16.3 feet	Key Note Segment		5 ft	68			
121785	32.9 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
121798	35.8 to 48.6 feet	Key Note Segment		5 ft	64			
121786	50.1 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
121799	64.5 to 78.3 feet	Key Note Segment		5 ft	69			
121777	65.2 to 66.2 feet	**Vertical Change**	.6"	5 ft	5	REF		
121778	85.6 to 86.6 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
121787	93.3 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
121788	104.3 to 108.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
121800	109.3 to 124.3 feet	Key Note Segment		5 ft	75			
121789	125.4 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
121790	143.4 to 152.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,580**
121801	152.9 to 166.6 feet	Key Note Segment		5 ft	69			
121791	166.6 to 193.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	136	SF	$40	**$5,440**
121802	196.7 to 210.4 feet	Key Note Segment		5 ft	69			
121779	197.1 to 198.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
121780	219.6 to 220.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
121781	224.1 to 225.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
121782	227.5 to 228.5 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
121803	237.7 to 251.6 feet	Key Note Segment		5 ft	70			
121792	255.5 to 266.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
121793	266.2 to 280.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
121804	280.2 to 293.7 feet	Key Note Segment		5 ft	68			
121794	294.1 to 297.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	15	SF	$40	**$620**
121795	298.7 to 314.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
121784	298.9 to 299.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
121796	314.9 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **ALDERWOOD CT** *Starting at:* **2358 ALDERWOOD CT** **$55,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041429	ALDERWOOD CT	N SCHNOOR AVE	2358 ALDERWOOD CT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121768	29.2 to 43.8 feet	Key Note Segment		5 ft	73			
121757	43.8 to 57.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	68	SF	$40	$2,700
121758	57.9 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,760
121769	80.9 to 94.8 feet	Key Note Segment		5 ft	69			
121749	81.6 to 82.6 feet	Vertical Change	-.38"	5 ft	5	REF		
121750	95.6 to 96.6 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
121751	102.4 to 103.4 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
121752	108.8 to 109.8 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
121759	110.3 to 120.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
121770	124.3 to 139.1 feet	Key Note Segment		5 ft	74			
121753	125.6 to 126.6 feet	Vertical Change	-.39"	5 ft	5	REF		
121760	141.0 to 167.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	$16,080
121771	167.8 to 181.5 feet	Key Note Segment		5 ft	69			
121754	168.5 to 169.5 feet	Vertical Change	-.31"	5 ft	5	REF		
121761	181.9 to 185.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	20	SF	$40	$800
121762	185.9 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
121763	191.5 to 195.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
121772	195.4 to 211.4 feet	Key Note Segment		5 ft	80			
121764	212.4 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
121755	225.4 to 226.4 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
121765	230.0 to 237.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
121773	238.4 to 252.8 feet	Key Note Segment		5 ft	72			
121766	253.0 to 259.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	31	SF	$40	$1,240
121767	262.7 to 266.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
121774	266.9 to 281.4 feet	Key Note Segment		5 ft	73			
121756	274.0 to 275.0 feet	Vertical Change	-.38"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ALDERWOOD CT** *Starting at:* **N SCHNOOR AVE** **$52,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281057	ALEXIS WAY	KIMBERLEY LN	MACADAMIA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112293	0.0 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,680**
112305	19.3 to 41.0 feet	Key Note Segment		5 ft	109			
112294	41.8 to 45.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
112295	47.8 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,780**
112306	72.0 to 89.4 feet	Key Note Segment		5 ft	87			
112273	80.9 to 81.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112274	92.5 to 93.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112296	92.6 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
112307	99.3 to 116.8 feet	Key Note Segment		5 ft	88			
112275	106.6 to 107.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
112276	117.6 to 118.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112297	118.0 to 121.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
112298	121.3 to 157.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	183	SF	$120	**$21,900**
112278	156.3 to 157.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
112279	161.8 to 164.7 feet	**Vertical Change**	-.5"	5 ft	14	REF		
112299	162.1 to 163.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
112280	165.4 to 168.6 feet	**Vertical Change**	1.14"	5 ft	16	REF		
112300	166.2 to 173.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
112281	169.4 to 170.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112282	171.1 to 173.9 feet	**Vertical Change**	.41"	5 ft	14	REF		
112308	173.8 to 193.1 feet	Key Note Segment		5 ft	97			
112283	174.9 to 177.7 feet	**Vertical Change**	-.41"	5 ft	14	REF		
112284	178.6 to 179.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
112285	180.3 to 181.3 feet	**Vertical Change**	-.66"	5 ft	5	REF		
112286	182.1 to 183.1 feet	**Vertical Change**	.73"	5 ft	5	REF		
112287	185.1 to 186.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112288	187.1 to 188.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
112289	193.8 to 194.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281057	ALEXIS WAY	KIMBERLEY LN	MACADAMIA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112301	194.9 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
112309	198.7 to 217.3 feet	Key Note Segment		5 ft	93			
112290	219.0 to 220.0 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
112302	221.0 to 226.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
112291	223.7 to 224.7 feet	**Vertical Change**	-.69"	5 ft	5	REF		
112292	229.2 to 230.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112303	229.3 to 238.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,460**
112304	238.4 to 239.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: E *side of* **ALEXIS WAY** *Starting at:* **KIMBERLEY LN** **$70,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281103	ALEXIS WAY	MACADAMIA AVE	KIMBERLEY LN	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112325	0.0 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
112326	9.3 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,100**
112327	18.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
112338	19.8 to 37.9 feet	Key Note Segment		5 ft	91			
112328	40.1 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
112339	44.3 to 62.8 feet	Key Note Segment		5 ft	93			
112329	65.1 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
112310	72.3 to 73.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
112330	77.8 to 120.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	212	SF	$120	**$25,380**
112311	104.8 to 105.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
112312	113.5 to 114.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
112340	121.1 to 140.0 feet	Key Note Segment		5 ft	95			
112314	130.6 to 131.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112331	141.9 to 147.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
112315	146.7 to 147.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
112341	147.9 to 166.5 feet	Key Note Segment		5 ft	93			
112316	157.1 to 158.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
112317	160.1 to 163.8 feet	**Vertical Change**	-.42"	5 ft	19	REF		
112332	168.3 to 179.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
112318	171.3 to 172.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112319	173.1 to 174.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
112320	177.5 to 178.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112321	179.3 to 182.0 feet	**Vertical Change**	.37"	5 ft	14	LF	$75	**$1,013**
112333	182.7 to 184.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
112322	184.7 to 185.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112334	187.0 to 188.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
112335	190.9 to 197.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
112342	197.4 to 224.2 feet	Key Note Segment		5 ft	134			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281103	ALEXIS WAY	MACADAMIA AVE	KIMBERLEY LN	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112323	208.8 to 209.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
112336	226.3 to 234.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
112324	227.7 to 228.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112337	236.9 to 238.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: W *side of* **ALEXIS WAY** *Starting at:* **MACADAMIA AVE** **$67,072.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091229	ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129298	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129299	2.4 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
129235	4.4 to 5.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
129300	9.0 to 12.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
129301	15.3 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
129302	20.9 to 31.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
129303	33.8 to 42.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
129237	36.6 to 37.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
129304	44.8 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
129238	53.8 to 54.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
129348	55.7 to 74.6 feet	Key Note Segment		5 ft	94			
129239	68.6 to 71.6 feet	**Vertical Change**	.28"	5 ft	15	REF		
129305	76.3 to 79.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
129240	77.2 to 78.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
129306	79.2 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
129241	79.3 to 80.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
129349	81.5 to 100.9 feet	Key Note Segment		5 ft	97			
129243	94.3 to 95.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129244	96.4 to 99.4 feet	**Vertical Change**	.32"	5 ft	15	REF		
129307	103.1 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
129245	108.1 to 109.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
129308	112.9 to 121.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
129246	120.9 to 121.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
129247	122.9 to 123.9 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
129309	124.6 to 126.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
129310	130.3 to 137.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
129249	131.7 to 132.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
129250	133.8 to 134.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091229	ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129311	139.8 to 143.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
129312	143.6 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
129313	154.6 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
129314	158.8 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
129350	159.8 to 178.3 feet	Key Note Segment		5 ft	92			
129251	163.7 to 164.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
129252	167.9 to 168.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129253	170.0 to 171.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
129254	176.9 to 177.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129255	180.7 to 181.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
129315	183.3 to 186.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
129351	186.3 to 203.6 feet	Key Note Segment		5 ft	87			
129256	189.4 to 190.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129257	191.5 to 192.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
129316	208.1 to 210.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
129317	211.0 to 224.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
129258	213.4 to 214.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
129318	227.6 to 252.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
129259	228.3 to 229.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
129260	239.1 to 240.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
129261	247.6 to 248.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
129262	251.9 to 252.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
129319	255.0 to 262.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
129352	262.3 to 278.8 feet	Key Note Segment		5 ft	83			
129263	264.9 to 265.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
129264	270.9 to 271.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
129265	275.1 to 278.2 feet	**Vertical Change**	.39"	5 ft	15	REF		
129320	279.8 to 282.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091229	ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129321	284.5 to 288.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
129353	288.5 to 308.0 feet	Key Note Segment		5 ft	98			
129266	299.0 to 300.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
129267	307.4 to 308.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129322	312.9 to 315.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
129268	313.6 to 314.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
129323	315.2 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
129324	323.8 to 335.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
129325	337.4 to 339.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
129326	340.2 to 352.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
129269	349.4 to 350.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129327	355.3 to 365.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
129354	366.1 to 385.0 feet	Key Note Segment		5 ft	95			
129270	379.3 to 380.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
129271	385.7 to 386.7 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
129328	386.8 to 391.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
129355	392.3 to 411.3 feet	Key Note Segment		5 ft	95			
129272	399.0 to 400.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
129273	405.4 to 408.2 feet	**Vertical Change**	.4"	5 ft	14	REF		
129329	413.5 to 435.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
129330	435.1 to 437.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
129331	440.3 to 445.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
129332	448.6 to 464.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
129333	467.2 to 468.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
129274	468.1 to 469.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
129356	469.8 to 488.0 feet	Key Note Segment		5 ft	91			
129275	477.0 to 478.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
129276	480.6 to 481.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091229	ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129277	482.6 to 483.6 feet	Vertical Change	.27"	5 ft	5	REF		
129278	486.3 to 487.3 feet	Vertical Change	.29"	5 ft	5	REF		
129279	488.9 to 489.9 feet	Vertical Change	3.77"	5 ft	5	SF	$75	**$375**
129334	490.6 to 494.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
129280	495.7 to 496.7 feet	Vertical Change	.58"	5 ft	5	SF	$75	**$375**
129357	496.3 to 513.5 feet	Key Note Segment		5 ft	86			
129281	500.0 to 501.0 feet	Vertical Change	-.31"	5 ft	5	REF		
129282	504.1 to 505.1 feet	Vertical Change	.26"	5 ft	5	REF		
129284	510.1 to 513.1 feet	Vertical Change	.31"	5 ft	15	REF		
129285	514.4 to 515.4 feet	Vertical Change	-.36"	5 ft	5	REF		
129335	515.6 to 541.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,780**
129336	542.2 to 549.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
129337	549.7 to 566.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$10,020**
129338	567.6 to 571.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
129358	573.0 to 591.8 feet	Key Note Segment		5 ft	94			
129286	575.5 to 580.8 feet	Vertical Change	.34"	5 ft	26	REF		
129339	593.3 to 594.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
129340	597.7 to 599.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
129359	599.3 to 617.3 feet	Key Note Segment		5 ft	90			
129341	618.3 to 622.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
129342	623.0 to 625.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
129343	637.1 to 667.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
129344	671.6 to 675.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
129360	676.3 to 695.6 feet	Key Note Segment		5 ft	97			
129287	676.7 to 677.7 feet	Vertical Change	.27"	5 ft	5	REF		
129288	683.1 to 684.1 feet	Vertical Change	.26"	5 ft	5	REF		
129289	693.0 to 694.0 feet	Vertical Change	-.4"	5 ft	5	REF		
129290	698.0 to 699.0 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091229	ALICANTE WAY	1294 ALICANTE WAY	SEGOVIA CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129345	698.7 to 702.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
129291	700.3 to 701.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
129292	702.6 to 703.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
129361	703.0 to 721.3 feet	Key Note Segment		5 ft	92			
129293	704.8 to 707.8 feet	**Vertical Change**	.46"	5 ft	15	REF		
129294	718.8 to 719.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129346	721.7 to 722.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
129347	723.5 to 747.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
129295	723.7 to 724.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
129296	743.1 to 744.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129297	746.9 to 747.9 feet	**Vertical Change**	1.11"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ALICANTE WAY** *Starting at:* **1294 ALICANTE WAY** **$226,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091220	ALICANTE WAY	LAGUNA WAY	1269 ALICANTE WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129230	1.1 to 10.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
129226	5.9 to 6.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129231	11.2 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
129227	13.3 to 18.5 feet	**Vertical Change**	.34"	5 ft	26	REF		
129232	20.8 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
129234	26.0 to 44.8 feet	Key Note Segment		5 ft	94			
129228	28.1 to 31.1 feet	**Vertical Change**	-.35"	5 ft	15	REF		
129229	42.4 to 43.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
129233	46.8 to 48.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **ALICANTE WAY** *Starting at:* **LAGUNA WAY** **$13,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091219	ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129164	4.1 to 8.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
129165	10.7 to 21.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
129210	25.4 to 43.9 feet	Key Note Segment		5 ft	93			
129105	26.1 to 27.1 feet	**Vertical Change**	-.72"	5 ft	5	REF		
129106	44.8 to 45.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
129107	49.1 to 50.1 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
129211	51.9 to 70.4 feet	Key Note Segment		5 ft	93			
129108	52.0 to 53.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
129109	68.8 to 69.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129166	72.8 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
129167	77.3 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
129110	79.7 to 80.7 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
129168	84.8 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
129169	90.2 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
129111	97.1 to 98.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
129170	98.8 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
129171	105.8 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
129112	127.7 to 128.7 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
129212	129.8 to 147.7 feet	Key Note Segment		5 ft	89			
129113	131.5 to 132.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
129114	140.0 to 141.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
129115	145.5 to 146.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
129172	150.5 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
129213	155.1 to 174.3 feet	Key Note Segment		5 ft	96			
129116	157.8 to 158.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129117	174.2 to 175.2 feet	**Vertical Change**	-.49"	5 ft	5	REF		
129173	175.1 to 176.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
129174	178.9 to 191.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091219	ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129175	191.3 to 197.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
129118	194.1 to 195.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
129176	197.6 to 200.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
129177	204.6 to 208.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
129178	208.6 to 211.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
129179	212.3 to 215.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
129180	217.9 to 230.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
129214	231.6 to 251.1 feet	Key Note Segment		5 ft	98			
129119	251.5 to 252.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
129181	253.2 to 256.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
129120	256.5 to 257.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
129215	258.3 to 277.0 feet	Key Note Segment		5 ft	94			
129121	274.7 to 275.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
129182	278.5 to 281.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
129183	281.3 to 335.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	271	SF	$120	**$32,460**
129122	285.4 to 286.4 feet	**Vertical Change**	.83"	5 ft	5	REF		
129123	290.7 to 291.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129124	293.0 to 294.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
129125	297.3 to 300.5 feet	**Vertical Change**	.28"	5 ft	16	REF		
129216	335.8 to 354.4 feet	Key Note Segment		5 ft	93			
129126	355.1 to 356.1 feet	**Vertical Change**	-1.09"	5 ft	5	SF	$75	**$375**
129184	356.3 to 359.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
129127	359.8 to 363.1 feet	**Vertical Change**	-.29"	5 ft	17	REF		
129217	362.1 to 379.9 feet	Key Note Segment		5 ft	89			
129128	380.9 to 381.9 feet	**Vertical Change**	-.49"	5 ft	5	LF	$75	**$375**
129185	382.3 to 396.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
129186	399.9 to 406.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
129129	408.4 to 409.4 feet	**Vertical Change**	.44"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091219	ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129187	409.3 to 414.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000
129188	414.3 to 437.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	$13,800
129218	440.4 to 459.0 feet	Key Note Segment		5 ft	93			
129130	442.8 to 443.8 feet	Vertical Change	.29"	5 ft	5	REF		
129189	460.9 to 464.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
129219	466.2 to 484.6 feet	Key Note Segment		5 ft	92			
129131	476.7 to 479.8 feet	Vertical Change	.3"	5 ft	16	REF		
129132	480.9 to 481.9 feet	Vertical Change	-.31"	5 ft	5	REF		
129133	486.6 to 487.6 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
129134	490.1 to 493.2 feet	Vertical Change	-.31"	5 ft	16	LF	$75	$1,163
129190	491.7 to 497.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
129135	496.6 to 497.6 feet	Vertical Change	-.27"	5 ft	5	REF		
129191	500.9 to 508.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
129136	503.0 to 504.0 feet	Vertical Change	.26"	5 ft	5	REF		
129137	511.7 to 512.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
129192	512.8 to 519.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
129138	524.5 to 525.5 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
129193	525.6 to 541.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,420
129139	539.4 to 540.4 feet	Vertical Change	.26"	5 ft	5	REF		
129220	543.3 to 562.1 feet	Key Note Segment		5 ft	94			
129140	543.6 to 544.6 feet	Vertical Change	.32"	5 ft	5	REF		
129141	560.4 to 561.4 feet	Vertical Change	.41"	5 ft	5	REF		
129194	563.7 to 565.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,260
129142	565.2 to 566.2 feet	Vertical Change	.26"	5 ft	5	REF		
129195	568.0 to 569.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
129221	569.8 to 588.3 feet	Key Note Segment		5 ft	93			
129143	573.7 to 574.7 feet	Vertical Change	.3"	5 ft	5	REF		
129196	588.4 to 589.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	6	SF	$40	$220

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091219	ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129144	590.1 to 591.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
129197	593.0 to 609.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,600
129198	614.3 to 625.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	$6,600
129146	621.6 to 624.9 feet	Vertical Change	-.26"	5 ft	17	REF		
129199	625.3 to 633.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
129200	634.0 to 644.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	$6,300
129147	636.8 to 637.8 feet	Vertical Change	.28"	5 ft	5	REF		
129222	646.8 to 665.8 feet	Key Note Segment		5 ft	95			
129148	650.0 to 651.0 feet	Vertical Change	.33"	5 ft	5	REF		
129149	653.5 to 654.5 feet	Vertical Change	.31"	5 ft	5	REF		
129201	668.8 to 671.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
129223	672.4 to 691.6 feet	Key Note Segment		5 ft	96			
129150	681.6 to 682.6 feet	Vertical Change	.37"	5 ft	5	REF		
129202	693.3 to 714.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,780
129151	705.6 to 706.6 feet	Vertical Change	.28"	5 ft	5	REF		
129203	714.9 to 719.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
129152	716.4 to 717.4 feet	Vertical Change	.26"	5 ft	5	REF		
129204	719.8 to 726.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
129153	724.9 to 725.9 feet	Vertical Change	.3"	5 ft	5	REF		
129205	726.3 to 735.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
129206	737.4 to 746.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	$5,700
129155	737.9 to 738.9 feet	Vertical Change	.3"	5 ft	5	REF		
129156	746.6 to 747.6 feet	Vertical Change	.37"	5 ft	5	REF		
129224	750.3 to 768.8 feet	Key Note Segment		5 ft	93			
129157	752.8 to 753.8 feet	Vertical Change	-.26"	5 ft	5	REF		
129158	761.1 to 762.1 feet	Vertical Change	.3"	5 ft	5	REF		
129159	767.3 to 768.3 feet	Vertical Change	.34"	5 ft	5	REF		
129225	775.8 to 794.9 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091219	ALICANTE WAY	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129160	776.5 to 777.5 feet	Vertical Change	.36"	5 ft	5	REF		
129162	797.2 to 798.2 feet	Vertical Change	.28"	5 ft	5	REF		
129207	798.1 to 800.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
129208	802.6 to 803.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
129209	813.3 to 820.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
129163	816.1 to 817.1 feet	Vertical Change	.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ALICANTE WAY** *Starting at:* **SEGOVIA CT** **$224,822.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110200937	ALMOND AVE	1209 ALMOND AVE	1209 ALMOND AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75121	11.6 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
75122	38.1 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
75123	43.9 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
75124	45.4 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
75125	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75126	72.7 to 73.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
75127	76.6 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
75128	84.1 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
75129	107.2 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
75120	119.8 to 120.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
75130	132.3 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
75131	145.1 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
75132	164.0 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
75133	171.8 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **1209 ALMOND AVE** **$63,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201630	ALMOND AVE	201 ALMOND AVE	MONTEREY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77986	0.0 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	34	SF	$120	**$4,104**
77987	5.8 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	149	SF	$120	**$17,856**
77988	34.8 to 38.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	20	SF	$120	**$2,376**
77989	38.4 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,608**
77990	55.7 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	13	SF	$120	**$1,512**
77991	60.7 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	25	SF	$120	**$2,952**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **201 ALMOND AVE** **$33,408.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201038	ALMOND AVE	220 ALMOND AVE	EMILY WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75523	0.3 to 18.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
75524	20.9 to 22.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
75525	23.0 to 33.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
75500	31.9 to 32.9 feet	**Vertical Change**	-.76"	5 ft	5	REF		
75526	36.1 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
75501	36.7 to 37.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
75527	60.3 to 63.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
75564	63.9 to 86.5 feet	Key Note Segment		5 ft	113			
75528	86.5 to 88.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
75529	89.0 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
75530	102.7 to 118.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
75531	119.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
75565	137.9 to 158.7 feet	Key Note Segment		5 ft	104			
75532	159.8 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75533	163.3 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
75534	179.8 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
75535	183.7 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
75536	198.7 to 227.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$17,040**
75537	227.5 to 228.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75566	236.9 to 266.8 feet	Key Note Segment		5 ft	150			
75502	238.0 to 239.0 feet	**Vertical Change**	-.54"	5 ft	5	REF		
75503	248.1 to 249.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
75538	271.7 to 337.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	327	SF	$120	**$39,180**
75504	291.2 to 292.2 feet	**Vertical Change**	.56"	5 ft	5	REF		
75505	317.2 to 318.2 feet	**Vertical Change**	1.15"	5 ft	5	REF		
75506	332.0 to 333.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
75507	336.4 to 337.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
75539	342.3 to 343.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201038	ALMOND AVE	220 ALMOND AVE	EMILY WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75540	343.3 to 370.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
75541	371.8 to 375.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
75542	378.1 to 389.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
75543	391.6 to 395.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
75544	395.8 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	575	SF	$120	**$69,000**
75567	512.5 to 542.4 feet	Key Note Segment		5 ft	150			
75545	546.7 to 554.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
75568	555.1 to 575.8 feet	Key Note Segment		5 ft	103			
75546	613.6 to 623.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
75547	626.2 to 629.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
75548	632.8 to 639.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
75549	647.7 to 698.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	253	SF	$120	**$30,360**
75510	690.9 to 691.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
75550	700.8 to 711.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
75551	711.9 to 714.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
75511	722.7 to 723.7 feet	**Vertical Change**	-.72"	5 ft	5	SF	$75	**$375**
75552	726.3 to 733.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
75553	733.7 to 781.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	241	SF	$120	**$28,920**
75512	763.5 to 764.5 feet	**Vertical Change**	-.46"	5 ft	5	REF		
75554	782.8 to 787.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
75555	787.3 to 811.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
75514	810.9 to 811.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
75556	813.4 to 816.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
75557	818.8 to 824.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
75558	831.8 to 836.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
75515	838.8 to 839.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
75559	841.4 to 846.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
75560	846.8 to 858.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201038	ALMOND AVE	220 ALMOND AVE	EMILY WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75516	847.4 to 848.4 feet	Vertical Change	.31"	5 ft	5	REF		
75517	851.7 to 852.7 feet	Vertical Change	.39"	5 ft	5	REF		
75518	856.2 to 857.2 feet	Vertical Change	-.9"	5 ft	5	REF		
75569	858.3 to 880.9 feet	Key Note Segment		5 ft	113			
75519	868.7 to 869.7 feet	Vertical Change	.27"	5 ft	5	REF		
75561	914.2 to 915.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
75520	921.7 to 922.7 feet	Vertical Change	-.48"	5 ft	5	LF	$75	**$375**
75521	940.8 to 941.8 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
75562	948.9 to 950.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
75563	954.9 to 955.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75570	961.2 to 962.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **220 ALMOND AVE** **$352,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201022	ALMOND AVE	401 ALMOND AVE	363 ALMOND AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75424	0.6 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
75422	14.6 to 15.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
75425	22.8 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75426	25.4 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
75427	32.6 to 37.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
75428	40.6 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
75429	44.7 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
75430	49.8 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
75431	53.8 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
75432	61.5 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
75423	64.3 to 65.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
75433	67.9 to 69.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
75434	69.2 to 93.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	121	SF	$40	**$4,840**
75435	93.4 to 98.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	25	SF	$40	**$980**
75436	100.7 to 101.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
75437	124.3 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
75438	140.8 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
75439	167.5 to 169.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
75440	172.7 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
75441	184.6 to 194.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
75442	196.8 to 198.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
75443	199.8 to 205.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
75444	209.0 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
75445	220.3 to 221.5 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **401 ALMOND AVE** **$66,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201310944	ALMOND AVE	800 MADERA AVE	MADERA AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114275	1.3 to 3.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	12	SF	$120	**$1,440**
114276	3.3 to 10.3 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	42	SF	$120	**$5,040**
114277	10.9 to 32.1 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	127	SF	$120	**$15,264**
114278	32.1 to 40.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	53	SF	$120	**$6,336**
114279	40.9 to 54.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	80	SF	$120	**$9,648**
114280	56.6 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	82	SF	$120	**$9,792**
114281	70.2 to 71.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	7	SF	$120	**$864**
114282	73.8 to 108.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	206	SF	$120	**$24,696**
114283	108.1 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
114284	115.8 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	**$3,600**
114285	123.8 to 130.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	40	SF	$120	**$4,824**
114286	131.8 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
114287	134.7 to 141.6 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	41	SF	$120	**$4,968**
114288	141.8 to 145.5 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	22	SF	$120	**$2,664**
114289	145.5 to 157.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	74	SF	$120	**$8,856**
114290	157.8 to 165.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	46	SF	$120	**$5,472**
114291	168.8 to 175.7 feet	Cross Slope (PAR)	7.0-8.0%	6 ft	41	SF	$120	**$4,968**
114292	175.7 to 179.2 feet	Cross Slope (PAR)	9.0-10.0%	6 ft	21	SF	$120	**$2,520**
114293	179.6 to 181.4 feet	Cross Slope (PAR)	7.0-8.0%	6 ft	11	SF	$120	**$1,296**
114318	181.4 to 211.3 feet	Key Note Segment		6 ft	179			
114294	213.2 to 215.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	15	SF	$120	**$1,800**
114295	217.9 to 243.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	156	SF	$120	**$18,720**
114296	244.5 to 250.9 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	38	SF	$120	**$4,608**
114297	250.9 to 254.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	23	SF	$120	**$2,808**
114298	254.8 to 259.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	30	SF	$120	**$3,600**
114299	261.3 to 266.2 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	29	SF	$120	**$3,528**
114300	266.2 to 267.7 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	9	SF	$120	**$1,080**
114301	270.5 to 273.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	20	SF	$120	**$2,376**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201310944	ALMOND AVE	800 MADERA AVE	MADERA AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114302	276.3 to 278.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	15	SF	$120	**$1,800**
114303	278.8 to 283.2 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	26	SF	$120	**$3,168**
114304	283.2 to 287.2 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	24	SF	$120	**$2,880**
114305	288.4 to 290.2 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	11	SF	$120	**$1,296**
114306	290.2 to 298.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	49	SF	$120	**$5,904**
114307	301.3 to 302.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	6	SF	$120	**$720**
114308	304.1 to 314.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	64	SF	$120	**$7,704**
114309	315.3 to 317.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
114310	319.3 to 333.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	87	SF	$120	**$10,440**
114311	336.2 to 339.3 feet	Cross Slope (PAR)	7.0-8.0%	6 ft	19	SF	$120	**$2,232**
114312	341.3 to 351.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	58	SF	$120	**$6,984**
114313	353.6 to 355.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,224**
114314	363.5 to 367.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	21	SF	$120	**$2,520**
114315	370.3 to 375.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,456**
114316	375.8 to 382.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	41	SF	$120	**$4,896**
114317	382.6 to 386.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,664**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **800 MADERA AVE** **$212,112.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191137	ALMOND AVE	850 RUBICON AVE	RUBICON AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103152	1.8 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
103153	17.6 to 27.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
103154	29.3 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
103155	48.8 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
103156	64.7 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
103157	68.1 to 69.6 feet		5.0-6.0%	5 ft	8			
103158	69.6 to 72.1 feet		6.0-7.0%	5 ft	13			
103159	69.6 to 72.1 feet	Running Slope	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
103160	72.1 to 77.3 feet		5.0-6.0%	5 ft	26			
103161	74.2 to 77.3 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **850 RUBICON AVE** **$37,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110200934	ALMOND AVE	BARNETT WAY	1200 ALMOND AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75084	0.1 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
75085	10.8 to 15.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	22	SF	$120	**$2,640**
75075	23.1 to 24.1 feet	**Vertical Change**	2.04"	5 ft	5	SF	$75	**$375**
75086	30.7 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
75087	33.4 to 44.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
75088	44.2 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
75076	49.8 to 50.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
75077	54.5 to 55.5 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
75089	59.2 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
75078	68.5 to 69.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
75090	69.0 to 80.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
75079	87.7 to 88.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
75091	89.4 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
75092	106.0 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
75093	110.0 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75094	118.3 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75095	120.3 to 127.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
75096	129.8 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
75081	145.8 to 146.8 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**
75097	157.8 to 165.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,440**
75098	168.6 to 170.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
75099	170.4 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
75100	179.8 to 182.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
75082	195.9 to 196.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
75101	199.2 to 201.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
75102	201.8 to 213.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
75103	213.8 to 217.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
75104	217.7 to 218.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110200934	ALMOND AVE	BARNETT WAY	1200 ALMOND AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75105	251.9 to 253.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
75106	256.1 to 271.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,060**
75107	297.6 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
75108	301.2 to 310.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
75109	310.3 to 311.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
75110	314.1 to 316.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,140**
75111	339.2 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
75112	359.0 to 363.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
75083	363.8 to 364.8 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
75113	365.1 to 366.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75114	376.1 to 380.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
75115	381.3 to 393.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
75116	393.6 to 395.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
75117	413.6 to 420.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
75118	423.3 to 426.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
75119	441.3 to 454.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **BARNETT WAY** **$127,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201019	ALMOND AVE	EMILY WAY	PARKING LOT ENTRANCE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75403	0.0 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
75404	7.1 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
75405	13.2 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
75406	17.9 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
75400	18.4 to 19.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
75407	46.9 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
75421	68.7 to 103.3 feet	Key Note Segment		5 ft	173			
75408	105.9 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
75409	114.5 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
75410	122.6 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
75411	130.6 to 131.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
75412	134.2 to 150.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
75413	150.9 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
75414	183.0 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
75415	201.8 to 213.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
75416	215.8 to 218.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
75417	219.8 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
75418	230.3 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
75419	246.2 to 247.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
75402	248.0 to 249.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
75420	249.8 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **EMILY WAY** **$108,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201243	ALMOND AVE	EMILY WAY	BARNETT WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76647	6.4 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
76648	10.7 to 16.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
76649	16.8 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
76650	20.1 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
76651	31.7 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
76652	37.6 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
76653	44.3 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
76654	66.1 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
76692	76.3 to 96.6 feet	Key Note Segment		5 ft	102			
76633	87.4 to 88.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
76655	101.8 to 103.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
76656	103.7 to 106.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
76657	111.4 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
76658	134.1 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
76659	145.0 to 147.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
76660	147.5 to 168.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
76661	183.0 to 198.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
76662	208.6 to 225.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
76663	261.8 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
76664	268.5 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
76665	273.5 to 298.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
76666	300.7 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
76693	306.8 to 330.5 feet	Key Note Segment		5 ft	119			
76634	307.2 to 308.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
76667	336.3 to 346.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
76635	347.6 to 348.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
76668	363.5 to 366.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76669	369.8 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201243	ALMOND AVE	EMILY WAY	BARNETT WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76636	375.3 to 376.3 feet	Vertical Change	.33"	5 ft	5	REF		
76637	387.8 to 388.8 feet	Vertical Change	-.46"	5 ft	5	REF		
76670	393.7 to 426.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**
76638	411.0 to 412.0 feet	Vertical Change	-.26"	5 ft	5	REF		
76639	424.5 to 425.5 feet	Vertical Change	-.41"	5 ft	5	REF		
76671	427.3 to 446.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
76672	447.6 to 451.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
76673	451.7 to 481.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
76640	466.7 to 467.7 feet	Vertical Change	.35"	5 ft	5	REF		
76674	482.1 to 502.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
76641	488.0 to 489.0 feet	Vertical Change	.33"	5 ft	5	REF		
76642	494.5 to 495.5 feet	Vertical Change	-.45"	5 ft	5	REF		
76643	500.9 to 501.9 feet	Vertical Change	-.28"	5 ft	5	REF		
76675	502.4 to 512.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
76644	508.5 to 509.5 feet	Vertical Change	.28"	5 ft	5	REF		
76676	512.4 to 515.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
76677	515.8 to 518.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
76678	519.8 to 528.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
76679	528.4 to 530.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
76680	532.2 to 546.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
76681	546.4 to 549.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
76682	550.7 to 563.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,620**
76683	563.8 to 564.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
76684	564.9 to 583.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	91	SF	$120	**$10,920**
76645	574.3 to 575.3 feet	Vertical Change	.46"	5 ft	5	REF		
76685	584.3 to 598.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
76686	599.5 to 605.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
76687	608.0 to 613.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201243	ALMOND AVE	EMILY WAY	BARNETT WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76646	609.0 to 610.0 feet	Vertical Change	-.38"	5 ft	5	REF		
76688	618.2 to 625.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,140**
76689	626.0 to 633.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
76690	638.3 to 641.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
76694	640.2 to 643.3 feet		5.0-6.0%	5 ft	15			
76695	640.2 to 643.3 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,860**
76691	641.4 to 643.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **EMILY WAY** **$247,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221136	ALMOND AVE	HAZELNUT DR	LEMON TREE DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81564	12.8 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
81565	40.6 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81566	47.3 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81567	54.3 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
81556	66.1 to 67.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
81568	84.1 to 111.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
81569	111.6 to 114.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
81570	114.9 to 131.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,780**
81571	133.5 to 136.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
81572	137.4 to 146.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
81573	147.7 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$23,940**
81557	158.2 to 159.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
81558	161.7 to 162.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81559	164.3 to 165.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
81560	174.3 to 175.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
81561	178.2 to 179.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
81574	190.5 to 215.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	**$15,000**
81575	215.5 to 244.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
81576	250.0 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
81562	252.0 to 253.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
81563	255.9 to 256.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
81577	270.3 to 273.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **HAZELNUT DR** **$130,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221139	ALMOND AVE	LEMON TREE DR	TOSCHI DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81589	0.6 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
81578	4.1 to 5.1 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
81590	7.3 to 9.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
81591	9.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
81579	43.2 to 44.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
81580	52.2 to 53.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
81592	67.7 to 68.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
81593	71.1 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
81594	76.4 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
81581	79.8 to 80.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
81595	82.9 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81596	96.3 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81597	101.3 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
81582	112.2 to 113.2 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
81598	123.2 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
81583	141.5 to 142.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
81599	143.8 to 149.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
81584	145.6 to 146.6 feet	**Vertical Change**	1.45"	5 ft	5	REF		
81600	151.8 to 177.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
81601	181.2 to 200.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
81585	193.4 to 194.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
81586	198.3 to 199.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
81602	200.6 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81603	207.2 to 210.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
81604	214.2 to 231.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
81605	234.8 to 237.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81606	238.3 to 240.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
81607	242.3 to 271.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221139	ALMOND AVE	LEMON TREE DR	TOSCHI DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81587	260.0 to 261.0 feet	Vertical Change	.29"	5 ft	5	REF		
81588	269.9 to 270.9 feet	Vertical Change	-.27"	5 ft	5	REF		
81608	275.9 to 277.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
81609	278.8 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
81610	291.6 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
81611	304.9 to 306.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **LEMON TREE DR** **$118,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311022	ALMOND AVE	MADERA AVE	201 ALMOND AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114459	0.5 to 16.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
114452	6.8 to 7.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
114460	17.7 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114461	23.1 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
114462	61.0 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
114453	62.1 to 63.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
114463	74.7 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
114454	75.6 to 76.6 feet	**Vertical Change**	2.59"	5 ft	5	REF		
114471	81.4 to 112.5 feet	Key Note Segment		5 ft	155			
114464	112.5 to 114.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
114465	117.0 to 118.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
114455	118.2 to 119.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
114466	120.8 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
114467	123.6 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
114456	125.5 to 126.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
114468	130.8 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
114457	131.5 to 132.5 feet	**Vertical Change**	-.42"	5 ft	5	REF		
114458	142.1 to 143.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
114469	143.9 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
114470	147.8 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **MADERA AVE** **$50,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201634	ALMOND AVE	MONTEREY DR	SANTA BONITA ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77997	1.4 to 7.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
77998	7.5 to 8.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77999	9.3 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
78000	19.8 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
78001	35.6 to 40.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
78002	42.9 to 46.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
78003	46.3 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
78004	71.7 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
78005	75.9 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
78006	81.8 to 93.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
78007	94.2 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
78008	99.3 to 107.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
78009	108.0 to 135.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
78010	138.8 to 143.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
78011	143.3 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
77992	165.3 to 166.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
78012	166.4 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
78013	174.1 to 190.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
78014	190.5 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
78015	195.8 to 215.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
77993	204.0 to 205.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
78016	222.6 to 230.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	39	SF	$120	**$4,620**
78017	230.9 to 235.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
78018	236.8 to 257.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
77994	263.3 to 264.3 feet	**Vertical Change**	-.55"	5 ft	5	SF	$75	**$375**
78019	265.2 to 280.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
77995	282.4 to 283.4 feet	**Vertical Change**	2.28"	5 ft	5	SF	$75	**$375**
78020	293.8 to 295.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201634	ALMOND AVE	MONTEREY DR	SANTA BONITA ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78021	299.0 to 302.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
78022	303.8 to 308.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	25	SF	$120	**$3,060**
77996	308.0 to 309.0 feet	**Vertical Change**	-1.05"	5 ft	5	REF		
78023	311.8 to 321.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
78024	324.3 to 333.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **MONTEREY DR** **$163,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201628	ALMOND AVE	MONTEREY DR	865 MONTEREY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77984	2.0 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	230	SF	$120	**$27,540**
77985	53.9 to 59.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
TOTAL COST FOR: S	*side of* **ALMOND AVE**	*Starting at:* **MONTEREY DR**						**$30,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201640	ALMOND AVE	OAKRIDGE DR	STADIUM RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78043	0.0 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	129	SF	$120	**$15,429**
78044	17.2 to 29.6 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	115	SF	$120	**$13,764**
78045	30.8 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	142	SF	$120	**$16,983**
78046	57.1 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	69	SF	$120	**$8,325**
78047	64.8 to 71.7 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	64	SF	$120	**$7,659**
78037	72.5 to 76.0 feet	**Vertical Change**	.37"	9 ft	32	LF	$75	**$2,428**
78048	76.0 to 77.7 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	16	SF	$120	**$1,887**
78038	77.2 to 78.2 feet	**Vertical Change**	-.26"	9 ft	9	REF		
78049	78.8 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	15	SF	$120	**$1,776**
78050	84.6 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	99	SF	$120	**$11,877**
78051	95.3 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	51	SF	$120	**$6,105**
78052	104.0 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	26	SF	$120	**$3,108**
78039	106.4 to 107.4 feet	**Vertical Change**	1.23"	9 ft	9	REF		
78053	124.8 to 152.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	254	SF	$120	**$30,525**
78054	152.3 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	69	SF	$120	**$8,325**
78055	165.7 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	13	SF	$120	**$1,554**
78056	172.5 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	174	SF	$120	**$20,868**
78057	193.9 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	18	SF	$120	**$2,109**
78058	198.0 to 200.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	23	SF	$120	**$2,775**
78059	201.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	19	SF	$120	**$2,220**
78060	209.9 to 219.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	90	SF	$120	**$10,767**
78061	221.9 to 223.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	13	SF	$120	**$1,554**
78062	224.6 to 229.4 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	44	SF	$120	**$5,328**
78063	229.6 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	108	SF	$120	**$12,987**
78064	244.2 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,221**
78065	253.0 to 254.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	12	SF	$120	**$1,443**
78066	254.8 to 257.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	21	SF	$120	**$2,553**
78067	270.1 to 274.0 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	36	SF	$120	**$4,329**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201640	ALMOND AVE	OAKRIDGE DR	STADIUM RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78068	276.6 to 280.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	40	SF	$120	**$4,773**
78040	278.3 to 279.3 feet	**Vertical Change**	.27"	9 ft	9	REF		
78069	283.4 to 300.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	156	SF	$120	**$18,759**
78041	302.6 to 303.6 feet	**Vertical Change**	.34"	9 ft	9	REF		
78070	302.7 to 324.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	202	SF	$120	**$24,198**
78071	324.5 to 331.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	65	SF	$120	**$7,770**
78072	335.3 to 344.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	83	SF	$120	**$9,990**
78073	347.1 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	122	SF	$120	**$14,652**
78074	362.9 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	12	SF	$120	**$1,443**
78042	378.3 to 379.3 feet	**Vertical Change**	.27"	9 ft	9	LF	$75	**$694**
78075	383.8 to 390.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	60	SF	$120	**$7,215**
78076	396.3 to 417.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	199	SF	$120	**$23,865**
78077	421.0 to 426.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	51	SF	$120	**$6,105**
78078	426.7 to 433.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	66	SF	$120	**$7,881**
78079	434.3 to 438.5 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	39	SF	$120	**$4,662**
78080	440.9 to 443.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	27	SF	$120	**$3,219**
78081	442.5 to 443.7 feet		5.0-6.0%	9 ft	11			

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **OAKRIDGE DR** **$333,124.88**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201650	ALMOND AVE	OAKRIDGE DR	MONTEREY DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78133	0.0 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
78119	6.2 to 7.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
78120	21.6 to 22.6 feet	**Vertical Change**	2.11"	5 ft	5	SF	$75	**$375**
78121	23.6 to 24.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
78134	35.0 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
78135	50.8 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
78136	72.6 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
78137	82.8 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
78138	87.3 to 90.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
78139	90.2 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
78140	109.0 to 112.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
78141	112.5 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
78122	125.1 to 126.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
78142	128.1 to 136.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
78143	136.6 to 137.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
78144	148.5 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
78145	152.3 to 155.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
78123	152.8 to 153.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
78146	165.9 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
78147	180.5 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
78148	206.8 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
78124	212.9 to 213.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
78149	217.0 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
78150	240.8 to 245.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
78151	249.7 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
78152	258.5 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
78153	266.6 to 276.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
78154	280.0 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201650	ALMOND AVE	OAKRIDGE DR	MONTEREY DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78155	287.1 to 289.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
78156	295.0 to 301.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
78157	305.1 to 319.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
78158	324.0 to 334.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
78159	334.6 to 338.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
78160	338.5 to 340.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
78161	345.1 to 357.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
78125	346.8 to 347.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
78162	363.7 to 381.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
78163	383.9 to 390.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
78126	389.6 to 390.6 feet	**Vertical Change**	.74"	5 ft	5	REF		
78164	395.9 to 400.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
78165	407.0 to 418.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
78166	418.6 to 421.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
78127	424.7 to 425.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
78167	424.8 to 428.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
78168	428.7 to 434.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
78169	437.3 to 440.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
78170	444.6 to 446.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
78171	449.4 to 454.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
78172	454.0 to 457.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
78173	461.8 to 465.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
78174	468.2 to 476.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
78128	476.3 to 477.3 feet	**Vertical Change**	.96"	5 ft	5	REF		
78175	479.5 to 486.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
78129	488.6 to 489.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
78176	493.4 to 498.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
78177	500.9 to 503.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201650	ALMOND AVE	OAKRIDGE DR	MONTEREY DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78130	508.2 to 509.2 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
78131	527.6 to 528.6 feet	Vertical Change	.63"	5 ft	5	SF	$75	**$375**
78178	532.7 to 533.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
78179	536.0 to 544.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
78132	545.0 to 546.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **OAKRIDGE DR** **$191,505.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201028	ALMOND AVE	PARKING LOT ENTRANCE	MADERA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75458	7.9 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
75459	14.3 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
75460	41.6 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
75461	43.2 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
75462	57.7 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
75463	67.6 to 72.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
75464	78.3 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
75465	83.6 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
75446	91.2 to 92.2 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
75466	95.0 to 96.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
75467	97.3 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
75447	106.2 to 107.2 feet	**Vertical Change**	-.41"	5 ft	5	REF		
75468	106.3 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
75494	117.0 to 140.7 feet	Key Note Segment		5 ft	118			
75448	142.1 to 143.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
75469	147.1 to 151.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
75470	153.7 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
75471	176.4 to 178.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
75472	185.4 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
75473	197.8 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75474	202.8 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
75475	213.3 to 219.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
75449	226.1 to 227.1 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
75476	268.4 to 271.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
75477	272.3 to 286.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
75478	288.5 to 309.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
75495	326.7 to 342.7 feet	Key Note Segment		5 ft	80			
75479	348.3 to 355.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201028	ALMOND AVE	PARKING LOT ENTRANCE	MADERA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75450	365.2 to 366.2 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
75480	373.9 to 376.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
75481	393.3 to 397.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
75482	400.3 to 405.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
75483	405.8 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
75484	413.9 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
75496	423.3 to 449.3 feet	Key Note Segment		5 ft	130			
75485	450.2 to 462.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
75451	461.5 to 462.5 feet	Vertical Change	.36"	5 ft	5	REF		
75486	488.0 to 489.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
75452	491.4 to 492.4 feet	Vertical Change	-.61"	5 ft	5	SF	$75	$375
75487	494.8 to 495.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
75488	499.2 to 513.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
75499	510.6 to 512.2 feet		5.0-6.0%	5 ft	8			
75497	513.7 to 527.2 feet	Key Note Segment		5 ft	68			
75453	535.7 to 536.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
75454	541.2 to 542.2 feet	Vertical Change	.55"	5 ft	5	SF	$75	$375
75455	557.6 to 558.6 feet	Vertical Change	.64"	5 ft	5	SF	$75	$375
75489	589.2 to 595.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,780
75498	597.8 to 628.4 feet	Key Note Segment		5 ft	153			
75456	629.0 to 630.0 feet	Vertical Change	.35"	5 ft	5	REF		
75490	629.7 to 631.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$780
75491	634.2 to 635.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
75492	635.6 to 647.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,320
75457	639.8 to 640.8 feet	Vertical Change	3.2"	5 ft	5	REF		
75493	650.7 to 651.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **PARKING LOT ENTRANCE** **$131,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191148	ALMOND AVE	RUBICON AVE	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103186	9.8 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
103187	16.3 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
103188	27.7 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
103189	42.2 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
103162	51.9 to 52.9 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
103190	54.2 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
103163	60.7 to 61.7 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
103191	65.8 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
103192	74.3 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
103193	85.4 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
103164	95.4 to 96.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
103194	95.5 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	232	SF	$120	**$27,780**
103195	147.5 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
103165	157.3 to 158.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
103196	186.7 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
103197	192.3 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
103166	201.0 to 202.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
103198	210.3 to 226.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
103199	226.4 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
103167	245.5 to 246.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
103200	253.3 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
103168	271.4 to 272.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
103201	288.8 to 338.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	251	SF	$120	**$30,060**
103169	298.2 to 299.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
103170	315.9 to 316.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
103171	333.5 to 334.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103202	341.8 to 347.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
103172	342.1 to 343.1 feet	**Vertical Change**	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191148	ALMOND AVE	RUBICON AVE	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103203	350.7 to 353.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
103204	365.1 to 379.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
103173	376.2 to 377.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
103205	381.8 to 383.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
103206	383.3 to 388.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
103207	390.5 to 403.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
103174	402.4 to 403.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
103208	406.0 to 410.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
103175	411.1 to 412.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
103209	412.7 to 416.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
103210	418.2 to 445.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
103176	419.6 to 420.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
103211	453.0 to 471.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
103212	476.5 to 482.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
103213	482.8 to 519.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
103214	523.8 to 571.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	239	SF	$120	**$28,680**
103177	563.9 to 564.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
103215	581.0 to 584.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
103216	588.3 to 592.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
103217	615.3 to 630.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
103218	634.0 to 658.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
103219	662.8 to 690.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,620**
103220	693.8 to 706.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
103178	711.6 to 712.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
103221	722.1 to 723.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
103222	745.0 to 748.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
103223	757.8 to 771.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
103224	779.3 to 798.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191148	ALMOND AVE	RUBICON AVE	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103179	780.3 to 781.3 feet	Vertical Change	.49"	5 ft	5	REF		
103225	817.2 to 834.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
103180	822.9 to 823.9 feet	Vertical Change	-.5"	5 ft	5	REF		
103226	840.3 to 844.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
103181	857.1 to 858.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
103183	901.2 to 902.2 feet	Vertical Change	-.67"	5 ft	5	SF	$75	**$375**
103227	908.0 to 909.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103184	912.0 to 913.0 feet	Vertical Change	1.44"	5 ft	5	SF	$75	**$375**
103228	915.9 to 922.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
103229	926.3 to 930.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
103230	931.7 to 934.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
103185	932.8 to 933.8 feet	Vertical Change	.29"	5 ft	5	REF		
103231	936.8 to 942.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **RUBICON AVE** **$369,885.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181701	ALMOND AVE	RUBICON AVE	IVY GLEN DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102385	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
102403	12.2 to 32.2 feet	Key Note Segment		5 ft	100			
102374	23.3 to 24.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
102386	36.4 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102404	37.8 to 58.3 feet	Key Note Segment		5 ft	103			
102375	47.3 to 48.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
102387	61.9 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
102388	70.9 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
102389	83.6 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
102405	95.2 to 118.3 feet	Key Note Segment		5 ft	116			
102376	109.8 to 110.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
102390	118.5 to 122.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
102391	123.6 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102406	124.7 to 143.8 feet	Key Note Segment		5 ft	96			
102377	134.0 to 135.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
102392	144.3 to 154.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	51	SF	$40	**$2,040**
102393	155.6 to 160.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
102378	161.2 to 162.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
102394	169.0 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
102379	177.0 to 178.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
102407	182.3 to 201.0 feet	Key Note Segment		5 ft	94			
102395	204.6 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
102408	207.3 to 230.1 feet	Key Note Segment		5 ft	114			
102396	234.9 to 236.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
102380	241.1 to 244.9 feet	**Vertical Change**	.31"	5 ft	19	REF		
102397	241.7 to 244.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
102398	245.0 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
102381	247.9 to 248.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181701	ALMOND AVE	RUBICON AVE	IVY GLEN DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102382	256.3 to 257.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
102399	267.4 to 271.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
102409	271.6 to 290.0 feet	Key Note Segment		5 ft	92			
102400	294.8 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
102410	297.7 to 317.3 feet	Key Note Segment		5 ft	98			
102383	298.4 to 299.4 feet	Vertical Change	-.3"	5 ft	5	REF		
102384	307.8 to 310.9 feet	Vertical Change	.43"	5 ft	15	REF		
102401	317.4 to 334.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	86	SF	$40	**$3,420**
102402	337.4 to 348.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**

TOTAL COST FOR: W *side of* **ALMOND AVE** *Starting at:* **RUBICON AVE** **$48,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201636	ALMOND AVE	SANTA BONITA ST	OAKRIDGE DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78027	0.0 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
78028	4.1 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
78029	16.5 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
78026	43.9 to 44.9 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
78030	51.8 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
78031	69.5 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
78032	95.1 to 107.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
78033	113.7 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
78034	126.1 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
78035	136.7 to 139.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
78036	139.1 to 142.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: N *side of* **ALMOND AVE** *Starting at:* **SANTA BONITA ST** **$38,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201645	ALMOND AVE	STADIUM RD	OAKRIDGE DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78094	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
78095	12.9 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
78096	25.4 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
78097	56.9 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
78098	71.2 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
78082	78.6 to 79.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
78099	96.6 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
78083	104.7 to 105.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
78084	116.7 to 117.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
78100	134.2 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
78085	158.2 to 159.2 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
78101	166.8 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
78102	174.7 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
78103	192.6 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
78104	208.0 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
78105	227.4 to 229.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
78106	231.3 to 232.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
78086	233.0 to 234.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
78107	238.4 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
78087	268.9 to 269.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
78108	275.0 to 281.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
78109	288.8 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
78110	309.1 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
78088	319.0 to 320.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
78111	329.4 to 330.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
78112	331.9 to 342.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
78113	345.0 to 351.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
78089	351.3 to 352.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201645	ALMOND AVE	STADIUM RD	OAKRIDGE DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78114	354.8 to 356.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
78115	368.5 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
78116	383.1 to 392.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
78090	384.0 to 385.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
78117	408.0 to 411.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
78118	417.8 to 419.0 feet		5.0-6.0%	5 ft	6			
78091	422.6 to 423.6 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
78092	431.8 to 432.8 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
78093	435.1 to 436.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **STADIUM RD** **$121,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221013	ALMOND AVE	TOSCHI DR	GRANADA DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80700	0.8 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
80701	23.2 to 31.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
80702	31.4 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
80703	39.1 to 48.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
80704	50.3 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80691	52.4 to 53.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
80705	52.8 to 65.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
80706	67.8 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80707	81.9 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
80708	86.4 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
80709	88.4 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
80692	88.5 to 89.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
80693	94.1 to 95.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
80710	96.3 to 98.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
80711	99.7 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
80694	100.6 to 101.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
80712	103.6 to 111.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
80695	104.4 to 105.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
80713	115.0 to 120.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
80696	116.3 to 117.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
80697	123.4 to 124.4 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
80714	125.3 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
80715	130.2 to 145.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
80716	148.0 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
80717	159.0 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
80698	164.3 to 165.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
80718	164.5 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
80719	171.7 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221013	ALMOND AVE	TOSCHI DR	GRANADA DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80720	176.6 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
80721	190.5 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
80722	210.3 to 213.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
80723	219.0 to 220.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
80724	225.5 to 231.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
80699	233.5 to 234.5 feet	**Vertical Change**	-.87"	5 ft	5	SF	$75	**$375**
80725	234.9 to 236.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **ALMOND AVE** *Starting at:* **TOSCHI DR** **$95,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071259	AMY AVE	KATHRYN AVE	LACRETA AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123568	0.3 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
123558	14.6 to 15.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
123569	17.6 to 30.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
123559	26.5 to 27.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
123560	29.7 to 30.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
123561	32.0 to 33.0 feet	**Vertical Change**	-.5"	5 ft	5	REF		
123570	32.5 to 95.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	314	SF	$120	**$37,680**
123562	46.2 to 47.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
123563	49.5 to 50.5 feet	**Vertical Change**	1"	5 ft	5	SF	$75	**$375**
123564	59.0 to 60.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123565	65.6 to 66.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
123574	85.5 to 86.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
123566	87.7 to 88.7 feet	**Vertical Change**	1.5"	5 ft	5	REF		
123571	99.3 to 111.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
123572	112.1 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	271	SF	$120	**$32,520**
123575	112.2 to 113.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
123567	118.1 to 119.1 feet	**Vertical Change**	2.97"	5 ft	5	REF		
123573	166.3 to 168.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **AMY AVE** *Starting at:* **KATHRYN AVE** **$96,093.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071543	AMY AVE	LACRETA AVE	KATHRYN AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124827	0.7 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124819	14.8 to 15.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124828	17.9 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
124829	26.8 to 33.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
124820	27.8 to 28.8 feet	**Vertical Change**	-.69"	5 ft	5	REF		
124830	37.0 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
124831	46.6 to 70.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,100**
124821	54.1 to 55.1 feet	**Vertical Change**	-.43"	5 ft	5	REF		
124842	72.0 to 79.8 feet	Key Note Segment		5 ft	39			
124832	79.8 to 85.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
124833	87.6 to 89.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
124834	89.3 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
124822	92.2 to 93.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
124835	105.2 to 109.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
124836	110.3 to 112.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
124837	115.3 to 119.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
124823	115.8 to 116.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
124838	120.0 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
124824	130.7 to 131.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
124839	134.5 to 139.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
124825	139.1 to 140.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
124840	140.3 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
124841	150.2 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
124826	154.7 to 155.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **AMY AVE** *Starting at:* **LACRETA AVE** **$67,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201111434	ANGEL FALLS CT	CAPISTRANO DR	CAPISTRANO DR	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92617	10.3 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92635	20.3 to 39.6 feet	Key Note Segment		5 ft	97			
92606	29.7 to 30.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
92636	45.9 to 65.3 feet	Key Note Segment		5 ft	97			
92618	66.5 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
92607	66.6 to 67.6 feet	**Vertical Change**	-.79"	5 ft	5	REF		
92619	71.9 to 82.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,540**
92620	86.5 to 87.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
92621	89.8 to 92.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
92622	95.0 to 96.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
92623	96.9 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
92608	118.4 to 119.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
92637	119.4 to 139.8 feet	Key Note Segment		5 ft	102			
92609	129.4 to 130.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
92610	146.0 to 147.0 feet	**Vertical Change**	2.74"	5 ft	5	SF	$75	**$375**
92624	152.6 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
92611	157.2 to 158.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
92625	164.3 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92638	166.5 to 185.5 feet	Key Note Segment		5 ft	95			
92612	176.6 to 177.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
92626	192.8 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92639	194.8 to 215.1 feet	Key Note Segment		5 ft	102			
92613	211.9 to 212.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
92614	226.3 to 227.3 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
92627	229.2 to 231.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
92628	246.6 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92615	261.3 to 262.3 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
92640	262.3 to 287.3 feet	Key Note Segment		5 ft	125			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201111434	ANGEL FALLS CT	CAPISTRANO DR	CAPISTRANO DR	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92616	269.2 to 270.2 feet	Vertical Change	.32"	5 ft	5	REF		
92629	291.0 to 296.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
92630	296.3 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92641	297.3 to 315.6 feet	Key Note Segment		5 ft	92			
92631	319.8 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
92642	341.3 to 360.4 feet	Key Note Segment		5 ft	96			
92632	361.8 to 363.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
92633	365.6 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
92634	377.8 to 379.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92643	379.3 to 380.8 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: E/N/W *side of* **ANGEL FALLS CT** *Starting at:* **CAPISTRANO DR** **$47,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071250	ANNA AVE	CARMEN AVE	KATHRYN AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123466	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
123467	2.1 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
123461	7.4 to 8.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
123468	14.6 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
123462	24.7 to 25.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
123469	26.7 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
123463	42.0 to 43.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
123470	42.5 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
123471	51.4 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
123472	56.2 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
123473	81.4 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
123474	87.5 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	263	SF	$120	**$31,620**
123464	121.9 to 122.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
123465	134.8 to 135.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123475	142.3 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**

TOTAL COST FOR: W *side of* **ANNA AVE** *Starting at:* **CARMEN AVE** **$81,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071554	ANNA AVE	KATHRYN AVE	CARMEN AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124943	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
124944	5.8 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
124945	21.3 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
124938	27.4 to 28.4 feet	**Vertical Change**	1.09"	5 ft	5	REF		
124946	47.1 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
124939	57.0 to 58.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
124947	66.8 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
124940	105.5 to 106.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
124941	121.5 to 122.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124942	126.1 to 127.1 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
124948	153.9 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: E *side of* **ANNA AVE** *Starting at:* **KATHRYN AVE** **$44,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110191331	APPLE CT	HACIENDA ST	HACIENDA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73970	0.6 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
73953	1.0 to 2.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
73997	6.7 to 28.9 feet	Key Note Segment		5 ft	100			
73955	28.4 to 29.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
73971	31.8 to 42.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,508**
73972	42.0 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,238**
73998	52.1 to 74.4 feet	Key Note Segment		5 ft	100			
73956	63.6 to 64.6 feet	**Vertical Change**	-.29"	5 ft	4	REF		
73973	75.1 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
73999	78.5 to 100.4 feet	Key Note Segment		5 ft	99			
73957	78.8 to 79.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
73974	101.3 to 125.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,284**
73958	131.4 to 132.4 feet	**Vertical Change**	.57"	5 ft	5	REF		
73975	131.4 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
74000	145.4 to 166.4 feet	Key Note Segment		5 ft	95			
73976	167.8 to 169.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
74001	170.3 to 192.3 feet	Key Note Segment		5 ft	99			
73977	192.5 to 195.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$504**
73978	196.4 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
73979	200.4 to 212.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,264**
73980	212.9 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
73981	234.0 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
74002	244.3 to 266.0 feet	Key Note Segment		5 ft	98			
74003	272.3 to 294.7 feet	Key Note Segment		5 ft	101			
73960	273.1 to 274.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
73961	294.6 to 295.6 feet	**Vertical Change**	.84"	5 ft	5	REF		
73982	303.3 to 315.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,696**
74004	319.9 to 341.0 feet	Key Note Segment		5 ft	95			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110191331	APPLE CT	HACIENDA ST	HACIENDA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73983	341.3 to 355.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	63	SF	$40	$2,502
73984	364.7 to 366.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$918
74005	366.4 to 388.9 feet	Key Note Segment		5 ft	101			
73962	367.3 to 368.3 feet	Vertical Change	.31"	5 ft	5	REF		
73963	388.8 to 389.8 feet	Vertical Change	-.32"	5 ft	5	REF		
73985	393.5 to 394.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$702
74006	394.8 to 416.5 feet	Key Note Segment		5 ft	98			
73986	420.5 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,512
73987	426.3 to 463.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	$19,818
74007	463.5 to 484.7 feet	Key Note Segment		5 ft	95			
73964	463.7 to 464.7 feet	Vertical Change	.33"	5 ft	5	REF		
73988	485.2 to 486.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$216
74008	488.1 to 509.8 feet	Key Note Segment		5 ft	98			
73965	488.4 to 489.4 feet	Vertical Change	-.3"	5 ft	5	REF		
73989	510.3 to 511.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$180
73990	513.4 to 533.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	$10,854
73966	526.9 to 527.9 feet	Vertical Change	.44"	5 ft	5	REF		
73991	534.2 to 541.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,050
73992	544.2 to 553.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$5,076
74009	553.6 to 575.8 feet	Key Note Segment		5 ft	100			
73993	576.5 to 580.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$666
74010	580.2 to 602.3 feet	Key Note Segment		5 ft	99			
73967	591.5 to 592.5 feet	Vertical Change	-.27"	5 ft	5	REF		
73994	605.3 to 618.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,182
73968	614.0 to 615.0 feet	Vertical Change	.29"	5 ft	5	REF		
73995	623.1 to 624.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$864
74011	625.5 to 647.6 feet	Key Note Segment		5 ft	99			
73969	647.0 to 648.0 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110191331	APPLE CT	HACIENDA ST	HACIENDA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73996	648.7 to 656.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,212**

TOTAL COST FOR: N/W/S *side of* **APPLE CT** *Starting at:* **HACIENDA ST** **$112,716.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191452	APPLE ST	HACIENDA ST	PEAR ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74651	0.0 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,402**
74652	9.2 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
74653	14.1 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,072**
74654	35.2 to 37.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$972**
74655	37.0 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,362**
74649	44.1 to 45.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
74656	72.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,910**
74657	92.9 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
74658	96.7 to 98.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
74659	102.2 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,774**
74660	120.3 to 124.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,998**
74661	126.3 to 131.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,646**
74650	129.5 to 130.5 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **APPLE ST** *Starting at:* **HACIENDA ST** **$56,052.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191530	APPLE ST	PEAR ST	HACIENDA ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74948	0.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,726**
74949	10.0 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
74950	14.1 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$918**
74951	16.3 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
74966	21.0 to 39.6 feet	Key Note Segment		5 ft	84			
74945	39.9 to 40.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
74952	40.9 to 42.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**
74967	43.2 to 66.9 feet	Key Note Segment		5 ft	107			
74953	66.9 to 68.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$252**
74954	68.3 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
74955	72.1 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
74956	75.8 to 78.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
74957	78.8 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
74958	83.5 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
74968	91.3 to 113.6 feet	Key Note Segment		5 ft	100			
74946	98.2 to 99.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
74959	114.6 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
74969	117.1 to 138.3 feet	Key Note Segment		5 ft	95			
74960	141.6 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
74961	148.1 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,186**
74962	157.6 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,076**
74970	167.8 to 190.2 feet	Key Note Segment		5 ft	101			
74963	191.5 to 193.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,134**
74971	193.8 to 216.1 feet	Key Note Segment		5 ft	100			
74947	215.5 to 216.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
74964	216.3 to 217.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$180**
74965	217.3 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**

TOTAL COST FOR: N *side of* **APPLE ST** *Starting at:* **PEAR ST** **$31,266.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221101	APPLE TREE CT	PEACH TREE DR	PEACH TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81218	0.0 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
81230	20.4 to 39.4 feet	Key Note Segment		5 ft	95			
81210	20.8 to 21.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
81219	43.2 to 48.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
81220	49.0 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
81231	50.3 to 73.3 feet	Key Note Segment		5 ft	115			
81211	54.0 to 55.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
81221	74.4 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81222	96.2 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81232	97.8 to 119.1 feet	Key Note Segment		5 ft	107			
81233	121.2 to 144.8 feet	Key Note Segment		5 ft	118			
81212	132.9 to 133.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
81213	144.6 to 145.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
81223	144.9 to 146.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
81224	153.4 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81234	166.0 to 187.3 feet	Key Note Segment		5 ft	107			
81235	190.7 to 212.3 feet	Key Note Segment		5 ft	108			
81225	213.4 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
81226	223.7 to 229.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
81227	232.2 to 236.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
81228	236.2 to 239.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
81236	239.6 to 259.2 feet	Key Note Segment		5 ft	98			
81215	258.7 to 259.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81229	260.3 to 277.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
81216	266.0 to 267.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
81217	280.0 to 281.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S/E/N *side of* **APPLE TREE CT** *Starting at:* **PEACH TREE DR** **$39,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110914	APPLE TREE DR	2668 APPLE TREE DR	TOSCHI DR	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89825	0.3 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
89826	3.9 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
89827	20.5 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
89828	25.2 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
89832	35.7 to 55.8 feet	Key Note Segment		5 ft	100			
89829	57.4 to 62.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
89833	62.1 to 82.9 feet	Key Note Segment		5 ft	104			
89822	62.5 to 63.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
89823	80.2 to 81.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
89830	85.0 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
89831	96.3 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
89834	103.9 to 105.3 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: S *side of* **APPLE TREE DR** *Starting at:* **2668 APPLE TREE DR** **$26,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110912	APPLE TREE DR	BERRY DR	2682 APPLE TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89810	0.6 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
89803	9.2 to 10.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
89811	13.9 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
89819	18.5 to 38.4 feet	Key Note Segment		5 ft	100			
89804	35.3 to 36.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
89805	39.1 to 40.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
89812	39.1 to 42.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
89820	43.4 to 62.7 feet	Key Note Segment		5 ft	97			
89806	53.7 to 54.7 feet	**Vertical Change**	-.43"	5 ft	5	REF		
89813	64.3 to 73.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
89814	78.4 to 79.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
89807	78.5 to 79.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
89815	79.7 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
89816	84.0 to 89.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
89808	91.8 to 92.8 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
89817	93.1 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
89821	103.7 to 123.9 feet	Key Note Segment		5 ft	101			
89809	122.6 to 123.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
89818	125.5 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: S *side of* **APPLE TREE DR** *Starting at:* **BERRY DR** **$25,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221003	APPLE TREE DR	GRANADA DR	TOSCHI DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80599	0.1 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
80600	5.3 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80598	8.5 to 9.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
80601	10.1 to 18.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
80602	18.7 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80603	25.6 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
80604	37.3 to 41.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
80605	50.8 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**

TOTAL COST FOR: N *side of* **APPLE TREE DR** *Starting at:* **GRANADA DR** **$26,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110910	APPLE TREE DR	TOSCHI DR	BERRY DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89777	0.0 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
89778	1.9 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
89765	2.1 to 3.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
89779	7.8 to 16.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
89795	18.3 to 39.4 feet	Key Note Segment		5 ft	106			
89766	23.1 to 24.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
89767	39.6 to 40.6 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
89780	41.4 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
89781	43.8 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89796	44.9 to 64.9 feet	Key Note Segment		5 ft	100			
89768	48.2 to 49.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
89769	49.9 to 50.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
89770	63.3 to 67.2 feet	**Vertical Change**	.42"	5 ft	20	REF		
89782	65.9 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
89783	72.7 to 83.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
89784	84.8 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
89785	88.3 to 93.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
89786	96.1 to 104.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
89797	104.8 to 125.0 feet	Key Note Segment		5 ft	101			
89771	108.8 to 109.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
89787	126.7 to 130.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
89798	130.8 to 152.2 feet	Key Note Segment		5 ft	107			
89788	156.4 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
89772	165.9 to 166.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
89789	169.2 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
89790	185.2 to 188.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
89799	190.8 to 212.4 feet	Key Note Segment		5 ft	108			
89774	213.0 to 214.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110910	APPLE TREE DR	TOSCHI DR	BERRY DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89791	213.8 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
89800	217.5 to 238.5 feet	Key Note Segment		5 ft	105			
89775	220.8 to 221.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
89792	240.9 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
89793	248.3 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
89794	255.8 to 259.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
89801	256.5 to 259.1 feet		5.0-6.0%	5 ft	13			
89802	256.5 to 259.1 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
89776	258.9 to 259.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **APPLE TREE DR** *Starting at:* **TOSCHI DR** **$63,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110220942	APPLE TREE DR	TOSCHI DR	GRANADA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80449	2.3 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
80450	20.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80447	21.3 to 22.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
80451	34.7 to 74.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	196	SF	$120	**$23,580**
80448	70.4 to 71.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **APPLE TREE DR** *Starting at:* **TOSCHI DR** **$41,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141128	ARAM AVE	1015 ARAM AVE	RIVERVIEW DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101738	3.4 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,224**
101762	7.1 to 19.5 feet	Key Note Segment		3 ft	37			
101739	20.7 to 24.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	**$1,260**
101740	28.1 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,620**
101741	36.7 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$576**
101729	42.9 to 43.9 feet	**Vertical Change**	.26"	3 ft	3	REF		
101742	43.1 to 44.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101743	47.0 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,080**
101744	50.0 to 52.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$1,008**
101745	54.4 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101746	56.9 to 58.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101747	60.3 to 70.5 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	31	SF	$120	**$3,672**
101730	67.3 to 68.3 feet	**Vertical Change**	.38"	3 ft	3	REF		
101748	70.5 to 84.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	42	SF	$120	**$5,004**
101749	84.4 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	**$1,764**
101766	89.8 to 90.9 feet		5.0-6.0%	3 ft	3			
101763	92.8 to 104.8 feet	Key Note Segment		3 ft	36			
101731	93.2 to 94.2 feet	**Vertical Change**	.29"	3 ft	3	REF		
101750	105.3 to 106.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	3 ft	5	SF	$40	**$180**
101751	107.9 to 111.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	10	SF	$120	**$1,152**
101752	112.4 to 115.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101764	117.3 to 132.2 feet	Key Note Segment		3 ft	45			
101732	118.1 to 119.1 feet	**Vertical Change**	.43"	3 ft	3	REF		
101734	132.9 to 136.0 feet	**Vertical Change**	.27"	3 ft	9	LF	$75	**$698**
101753	139.6 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,152**
101754	144.0 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101755	152.1 to 159.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	23	SF	$120	**$2,700**
101735	155.7 to 156.7 feet	**Vertical Change**	.4"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141128	ARAM AVE	1015 ARAM AVE	RIVERVIEW DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101756	160.1 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	38	SF	$120	**$4,608**
101736	160.8 to 161.8 feet	**Vertical Change**	.38"	3 ft	3	REF		
101757	173.8 to 176.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$936**
101758	177.8 to 181.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	**$1,404**
101759	183.8 to 185.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	6	SF	$120	**$720**
101765	185.8 to 199.3 feet	Key Note Segment		3 ft	41			
101760	201.8 to 202.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
101737	212.3 to 213.3 feet	**Vertical Change**	.4"	3 ft	3	LF	$75	**$225**
101761	216.1 to 217.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**

TOTAL COST FOR: E *side of* **ARAM AVE** *Starting at:* **1015 ARAM AVE** **$34,870.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141131	ARAM AVE	RIVERVIEW DR	W CENTRAL AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101780	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101781	9.7 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$648**
101782	19.2 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	**$1,944**
101767	31.2 to 32.2 feet	**Vertical Change**	.28"	3 ft	3	LF	$75	**$225**
101783	33.2 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$1,008**
101784	42.4 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	25	SF	$120	**$3,024**
101785	56.1 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
101813	57.3 to 69.8 feet	Key Note Segment		3 ft	38			
101769	63.0 to 64.0 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101786	69.8 to 71.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	6	SF	$40	**$240**
101787	75.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,116**
101788	83.1 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	**$1,332**
101789	89.4 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,224**
101790	96.8 to 111.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	45	SF	$120	**$5,364**
101791	116.2 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	**$1,764**
101792	123.4 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101770	127.6 to 128.6 feet	**Vertical Change**	-.42"	3 ft	3	LF	$75	**$225**
101793	134.2 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,080**
101794	139.3 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101814	147.7 to 161.3 feet	Key Note Segment		3 ft	41			
101795	163.7 to 165.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101796	167.7 to 173.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	**$1,908**
101815	173.5 to 186.5 feet	Key Note Segment		3 ft	39			
101797	186.8 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101771	188.7 to 189.7 feet	**Vertical Change**	.32"	3 ft	3	LF	$75	**$225**
101772	198.1 to 199.1 feet	**Vertical Change**	-.26"	3 ft	3	LF	$75	**$225**
101773	208.4 to 209.4 feet	**Vertical Change**	-.28"	3 ft	3	LF	$75	**$225**
101774	223.9 to 224.9 feet	**Vertical Change**	-.27"	3 ft	3	LF	$75	**$225**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141131	ARAM AVE	RIVERVIEW DR	W CENTRAL AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101798	226.5 to 227.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101799	230.6 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101800	235.3 to 236.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101775	238.2 to 239.2 feet	**Vertical Change**	-.29"	3 ft	3	LF	$75	**$225**
101801	241.7 to 242.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101802	245.6 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	22	SF	$120	**$2,592**
101803	254.0 to 259.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	17	SF	$120	**$2,052**
101776	257.3 to 258.3 feet	**Vertical Change**	.26"	3 ft	3	REF		
101804	259.7 to 261.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	6	SF	$120	**$720**
101816	261.8 to 277.0 feet	Key Note Segment		3 ft	46			
101777	272.7 to 273.7 feet	**Vertical Change**	2.21"	3 ft	3	REF		
101805	277.0 to 278.7 feet	**Cross Slope (Driveway)**	6.0-7.0%	3 ft	5	SF	$40	**$204**
101806	278.7 to 281.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$828**
101807	281.0 to 282.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$468**
101808	282.7 to 284.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$792**
101809	284.9 to 289.4 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	14	SF	$120	**$1,620**
101778	288.7 to 289.7 feet	**Vertical Change**	.33"	3 ft	3	REF		
101810	290.8 to 292.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
101811	292.8 to 293.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101812	297.0 to 301.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,620**
101779	301.4 to 302.4 feet	**Vertical Change**	-.31"	3 ft	3	REF		

TOTAL COST FOR: W *side of* **ARAM AVE** *Starting at:* **RIVERVIEW DR** **$38,739.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141125	ARAM AVE	W CENTRAL AVE	1015 ARAM AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101704	0.0 to 8.5 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	26	SF	$120	**$3,060**
101728	0.2 to 1.3 feet		6.0-7.0%	3 ft	3			
101705	10.0 to 12.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$864**
101706	12.4 to 21.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	27	SF	$120	**$3,276**
101698	23.3 to 24.3 feet	**Vertical Change**	.28"	3 ft	3	LF	$75	**$225**
101725	27.3 to 42.3 feet	Key Note Segment		3 ft	45			
101707	42.7 to 44.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$648**
101708	46.8 to 49.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$1,008**
101699	49.1 to 50.1 feet	**Vertical Change**	.57"	3 ft	3	REF		
101709	50.7 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101710	54.4 to 66.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	37	SF	$120	**$4,428**
101711	68.8 to 69.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101712	69.8 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101713	72.8 to 73.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101714	78.1 to 79.1 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101700	80.3 to 81.3 feet	**Vertical Change**	-.89"	3 ft	3	SF	$75	**$225**
101726	84.8 to 98.3 feet	Key Note Segment		3 ft	41			
101715	99.6 to 101.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
101716	104.2 to 108.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	14	SF	$120	**$1,620**
101727	110.0 to 122.8 feet	Key Note Segment		3 ft	38			
101717	123.8 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	23	SF	$120	**$2,700**
101718	133.8 to 135.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$468**
101719	135.1 to 137.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$720**
101720	139.8 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	26	SF	$120	**$3,060**
101701	144.6 to 145.6 feet	**Vertical Change**	-.31"	3 ft	3	REF		
101721	154.1 to 155.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101702	155.0 to 156.0 feet	**Vertical Change**	.27"	3 ft	3	REF		
101722	158.4 to 163.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	14	SF	$120	**$1,728**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141125	ARAM AVE	W CENTRAL AVE	1015 ARAM AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101723	170.1 to 177.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	21	SF	$120	**$2,520**
101703	170.4 to 171.4 feet	**Vertical Change**	-.45"	3 ft	3	REF		
101724	180.4 to 194.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	41	SF	$120	**$4,896**

TOTAL COST FOR: E *side of* **ARAM AVE** *Starting at:* **W CENTRAL AVE** **$34,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141117	ARAM AVE	W CENTRAL AVE	W CENTRAL AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101647	0.0 to 1.8 feet	Cross Slope (PAR)	14.0-15.0%	3 ft	5	SF	$120	**$648**
101641	2.7 to 3.7 feet	**Vertical Change**	.48"	3 ft	3	REF		
101648	3.5 to 5.9 feet	Cross Slope (PAR)	12.0-13.0%	3 ft	7	SF	$120	**$864**
101642	8.1 to 9.1 feet	**Vertical Change**	-.3"	3 ft	3	LF	$75	**$225**
101649	10.7 to 17.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	19	SF	$120	**$2,268**
101643	12.6 to 13.6 feet	**Vertical Change**	.35"	3 ft	3	REF		
101650	20.4 to 21.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
101644	24.3 to 25.3 feet	**Vertical Change**	.28"	3 ft	3	LF	$75	**$225**
101645	26.2 to 27.2 feet	**Vertical Change**	3.07"	3 ft	3	SF	$75	**$225**
101651	29.9 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,080**
101646	30.4 to 31.4 feet	**Vertical Change**	-.27"	3 ft	3	REF		
101652	35.4 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	25	SF	$120	**$3,024**
101653	46.8 to 55.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	26	SF	$120	**$3,132**

TOTAL COST FOR: W *side of* **ARAM AVE** *Starting at:* **W CENTRAL AVE** **$12,051.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140913	ARBELLA LN	DUTRA WAY	JONATHAN WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64270	0.1 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
64271	2.7 to 7.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**
64272	10.8 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
64303	29.2 to 62.6 feet	Key Note Segment		5 ft	167			
64252	40.5 to 41.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
64253	64.6 to 65.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
64273	66.2 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
64254	70.4 to 71.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
64274	74.1 to 89.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
64255	79.5 to 80.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
64275	89.8 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
64276	96.8 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
64304	107.2 to 128.2 feet	Key Note Segment		5 ft	105			
64256	118.4 to 119.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
64277	130.8 to 159.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	**$16,920**
64257	144.6 to 145.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
64278	162.3 to 171.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
64305	172.2 to 193.0 feet	Key Note Segment		5 ft	104			
64258	181.8 to 182.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
64279	194.5 to 213.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,220**
64280	215.3 to 238.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
64306	239.7 to 259.6 feet	Key Note Segment		5 ft	100			
64259	245.2 to 246.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
64281	264.3 to 267.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
64282	270.3 to 291.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
64283	293.7 to 305.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
64307	305.7 to 333.9 feet	Key Note Segment		5 ft	141			
64284	336.2 to 345.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140913	ARBELLA LN	DUTRA WAY	JONATHAN WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64285	347.8 to 388.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	206	SF	$120	**$24,660**
64260	371.6 to 372.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
64286	391.4 to 411.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
64261	412.7 to 413.7 feet	**Vertical Change**	3.53"	5 ft	5	SF	$75	**$375**
64308	413.1 to 432.5 feet	Key Note Segment		5 ft	97			
64262	422.9 to 423.9 feet	**Vertical Change**	1.7"	5 ft	5	REF		
64287	436.1 to 474.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	191	SF	$120	**$22,860**
64288	477.0 to 478.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
64309	478.4 to 507.6 feet	Key Note Segment		5 ft	146			
64289	509.2 to 512.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
64290	515.1 to 527.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
64291	527.6 to 551.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
64263	528.0 to 529.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
64264	534.8 to 535.8 feet	**Vertical Change**	2.7"	5 ft	5	REF		
64292	552.1 to 553.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64293	556.3 to 560.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
64310	561.3 to 581.9 feet	Key Note Segment		5 ft	103			
64265	563.4 to 564.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
64266	571.6 to 572.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
64294	583.0 to 587.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
64311	587.6 to 616.2 feet	Key Note Segment		5 ft	143			
64295	617.3 to 618.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
64267	617.6 to 618.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
64296	618.9 to 626.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
64297	626.6 to 628.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
64298	636.3 to 638.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
64299	643.5 to 648.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
64300	648.6 to 675.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	135	SF	$120	**$16,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140913	ARBELLA LN	DUTRA WAY	JONATHAN WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64268	654.5 to 655.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
64301	675.6 to 678.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
64312	678.2 to 713.6 feet	Key Note Segment		5 ft	177			
64269	706.1 to 707.1 feet	**Vertical Change**	.65"	5 ft	5	REF		
64302	716.4 to 719.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: E *side of* **ARBELLA LN** *Starting at:* **DUTRA WAY** **$232,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140931	ARBELLA LN	FREDERICK WAY	JUDITH WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64537	0.0 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
64538	8.9 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
64529	24.8 to 25.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
64539	25.4 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
64530	28.9 to 29.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
64549	34.3 to 75.0 feet	Key Note Segment		5 ft	204			
64531	40.8 to 41.8 feet	**Vertical Change**	2.85"	5 ft	5	REF		
64532	47.4 to 48.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
64533	56.4 to 57.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
64534	76.0 to 77.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
64540	76.8 to 85.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
64541	85.8 to 88.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
64542	88.4 to 98.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
64543	98.8 to 124.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
64544	125.2 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,700**
64535	135.2 to 136.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
64536	142.4 to 143.4 feet	**Vertical Change**	-.66"	5 ft	5	REF		
64545	145.6 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
64546	150.2 to 152.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
64547	153.3 to 156.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
64548	156.8 to 157.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **ARBELLA LN** *Starting at:* **FREDERICK WAY** **$61,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140922	ARBELLA LN	JONATHAN WAY	FREDERICK WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64413	0.3 to 18.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
64414	18.9 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64415	22.2 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
64416	31.3 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	241	SF	$120	**$28,860**
64407	62.0 to 63.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
64408	73.2 to 74.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
64417	80.6 to 94.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
64409	83.1 to 84.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
64411	94.4 to 97.2 feet	**Vertical Change**	.49"	5 ft	14	REF		
64418	94.6 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
64419	125.5 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: W *side of* **ARBELLA LN** *Starting at:* **JONATHAN WAY** **$74,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140943	ARBELLA LN	JUDITH WAY	DUTRA WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64670	0.8 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
64671	5.5 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	247	SF	$120	**$29,580**
64679	55.9 to 79.4 feet	Key Note Segment		5 ft	118			
64667	56.3 to 57.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
64668	79.7 to 80.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
64672	83.1 to 86.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
64673	86.8 to 113.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
64680	113.6 to 130.3 feet	Key Note Segment		5 ft	84			
64674	131.1 to 132.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64675	132.3 to 149.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
64681	148.3 to 149.3 feet	**Continuous Width**	15"	5 ft	5	SF	$120	**$600**
64676	161.5 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
64669	164.6 to 165.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
64677	165.0 to 196.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,020**
64678	196.7 to 204.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: W *side of* **ARBELLA LN** *Starting at:* **JUDITH WAY** **$86,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121052	ARDILLA DR	BRIDGE WAY	MONARCH RD	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60173	1.2 to 2.2 feet	Vertical Change	.26"	5 ft	5	REF		
60178	1.4 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,740**
60174	4.9 to 5.9 feet	Vertical Change	.27"	5 ft	5	REF		
60179	31.5 to 52.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
60180	54.6 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
60181	61.0 to 71.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
60182	73.6 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
60183	78.1 to 98.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,360**
60175	88.7 to 89.7 feet	Vertical Change	.5"	5 ft	5	REF		
60184	100.5 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
60185	113.5 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,820**
60176	114.5 to 115.5 feet	Vertical Change	.27"	5 ft	5	REF		
60177	141.4 to 142.4 feet	Vertical Change	-.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ARDILLA DR** *Starting at:* **BRIDGE WAY** **$76,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121013	ARDILLA DR	KNOX ST	LOS CERRITOS WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59847	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
59848	6.8 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
59849	10.8 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
59850	20.8 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	477	SF	$120	**$57,180**
59842	23.9 to 24.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
59843	41.1 to 42.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
59864	116.5 to 138.1 feet	Key Note Segment		5 ft	108			
59851	138.2 to 139.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
59852	139.8 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
59865	142.4 to 164.3 feet	Key Note Segment		5 ft	110			
59844	142.9 to 143.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
59853	164.3 to 175.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	55	SF	$40	**$2,200**
59854	175.3 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59855	179.0 to 208.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	**$17,460**
59866	208.4 to 229.9 feet	Key Note Segment		5 ft	108			
59856	230.3 to 233.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
59867	234.8 to 256.5 feet	Key Note Segment		5 ft	109			
59857	256.5 to 257.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$260**
59845	256.7 to 257.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59858	260.1 to 297.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	186	SF	$120	**$22,380**
59859	305.6 to 329.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	120	SF	$120	**$14,460**
59860	332.5 to 349.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
59846	338.9 to 339.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
59861	350.4 to 355.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
59862	356.8 to 365.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
59863	367.9 to 369.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **ARDILLA DR** *Starting at:* **KNOX ST** **$145,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121112	ARDILLA DR	KNOX ST	MARIPOSA ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60317	1.3 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
60305	1.6 to 2.6 feet	**Vertical Change**	-.37"	5 ft	5	REF		
60318	8.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
60319	16.3 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
60320	17.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
60346	26.3 to 47.0 feet	Key Note Segment		5 ft	104			
60306	27.8 to 28.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
60321	49.7 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
60322	55.6 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
60323	56.6 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
60307	57.3 to 58.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
60324	66.2 to 67.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
60347	68.9 to 89.5 feet	Key Note Segment		5 ft	103			
60325	89.5 to 93.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	19	SF	$40	**$760**
60348	94.3 to 115.5 feet	Key Note Segment		5 ft	106			
60326	115.8 to 128.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	64	SF	$40	**$2,580**
60327	131.3 to 134.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
60328	134.3 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
60308	146.3 to 147.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
60329	151.3 to 154.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
60349	154.6 to 175.8 feet	Key Note Segment		5 ft	106			
60330	175.8 to 177.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$420**
60331	177.9 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
60350	180.7 to 201.4 feet	Key Note Segment		5 ft	104			
60309	191.1 to 192.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
60332	201.5 to 204.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
60333	207.6 to 216.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
60334	216.0 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121112	ARDILLA DR	KNOX ST	MARIPOSA ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60310	217.1 to 218.1 feet	Vertical Change	.26"	5 ft	5	REF		
60335	229.0 to 240.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
60351	241.3 to 261.0 feet	Key Note Segment		5 ft	99			
60352	266.8 to 287.2 feet	Key Note Segment		5 ft	102			
60336	287.6 to 297.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
60311	294.5 to 295.5 feet	Vertical Change	1.59"	5 ft	5	REF		
60337	297.8 to 316.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
60338	319.9 to 323.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
60339	324.3 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
60353	326.9 to 346.6 feet	Key Note Segment		5 ft	99			
60340	347.1 to 351.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	24	SF	$40	**$940**
60354	352.6 to 372.3 feet	Key Note Segment		5 ft	99			
60341	374.3 to 391.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
60312	376.9 to 377.9 feet	Vertical Change	-.35"	5 ft	5	REF		
60342	393.9 to 410.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
60313	401.4 to 402.4 feet	Vertical Change	.27"	5 ft	5	REF		
60355	412.7 to 432.1 feet	Key Note Segment		5 ft	97			
60314	432.2 to 433.2 feet	Vertical Change	.35"	5 ft	5	REF		
60343	432.8 to 437.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
60344	437.3 to 438.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
60356	438.8 to 458.1 feet	Key Note Segment		5 ft	97			
60316	458.2 to 459.2 feet	Vertical Change	.29"	5 ft	5	REF		
60345	458.8 to 482.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**

TOTAL COST FOR: S *side of* **ARDILLA DR** *Starting at:* **KNOX ST** **$111,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121010	ARDILLA DR	LOS CERRITOS WAY	KNOX ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59811	0.7 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
59812	2.5 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
59813	9.3 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
59832	11.8 to 32.7 feet	Key Note Segment		5 ft	105			
59800	30.7 to 31.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
59814	33.3 to 34.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
59833	38.6 to 57.8 feet	Key Note Segment		5 ft	96			
59801	40.5 to 41.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59802	51.5 to 52.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
59803	55.2 to 56.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
59815	58.6 to 62.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
59804	59.6 to 60.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59816	62.6 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
59806	73.2 to 74.2 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
59817	82.3 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59818	87.8 to 98.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
59819	99.0 to 102.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
59820	102.5 to 105.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
59834	105.3 to 125.7 feet	Key Note Segment		5 ft	102			
59807	115.8 to 116.8 feet	**Vertical Change**	.75"	5 ft	5	REF		
59835	131.0 to 150.6 feet	Key Note Segment		5 ft	98			
59821	152.3 to 170.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
59822	171.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
59823	175.7 to 191.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
59836	191.8 to 211.8 feet	Key Note Segment		5 ft	100			
59824	211.8 to 215.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
59825	216.5 to 217.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
59837	217.6 to 237.3 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121010	ARDILLA DR	LOS CERRITOS WAY	KNOX ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59826	238.0 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,880**
59838	277.8 to 298.2 feet	Key Note Segment		5 ft	102			
59827	298.5 to 303.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$980**
59839	303.4 to 324.9 feet	Key Note Segment		5 ft	108			
59828	324.9 to 362.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	190	SF	$40	**$7,580**
59840	362.8 to 384.2 feet	Key Note Segment		5 ft	107			
59808	385.7 to 386.7 feet	**Vertical Change**	2.55"	5 ft	5	SF	$75	**$375**
59841	389.8 to 409.3 feet	Key Note Segment		5 ft	98			
59809	409.6 to 410.6 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
59829	410.8 to 413.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
59830	415.3 to 418.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
59831	418.3 to 431.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,860**
59810	430.1 to 431.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ARDILLA DR** *Starting at:* **LOS CERRITOS WAY** **$95,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121118	ARDILLA DR	MARIPOSA ST	BRIDGE WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60375	0.0 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
60392	22.4 to 41.3 feet	Key Note Segment		5 ft	95			
60376	56.6 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
60393	65.4 to 84.3 feet	Key Note Segment		5 ft	94			
60377	85.2 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
60394	90.8 to 111.5 feet	Key Note Segment		5 ft	104			
60378	112.1 to 115.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	16	SF	$40	**$640**
60379	117.9 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
60380	126.2 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
60395	150.9 to 171.3 feet	Key Note Segment		5 ft	102			
60370	151.8 to 152.8 feet	Vertical Change	.32"	5 ft	5	REF		
60396	176.9 to 196.7 feet	Key Note Segment		5 ft	99			
60381	197.8 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
60382	216.3 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
60397	236.8 to 256.5 feet	Key Note Segment		5 ft	99			
60371	238.0 to 239.0 feet	Vertical Change	.27"	5 ft	5	REF		
60398	262.9 to 283.3 feet	Key Note Segment		5 ft	102			
60372	279.9 to 280.9 feet	Vertical Change	-.26"	5 ft	5	REF		
60383	283.6 to 284.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
60384	284.8 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
60385	299.5 to 302.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
60386	304.7 to 305.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
60387	305.8 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
60388	319.5 to 322.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
60399	323.7 to 346.5 feet	Key Note Segment		5 ft	114			
60373	335.1 to 336.1 feet	Vertical Change	.32"	5 ft	5	REF		
60374	346.3 to 347.3 feet	Vertical Change	-.3"	5 ft	5	REF		
60389	346.8 to 352.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121118	ARDILLA DR	MARIPOSA ST	BRIDGE WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60400	353.8 to 379.3 feet	Key Note Segment		5 ft	128			
60390	379.5 to 380.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
60391	383.8 to 396.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**

TOTAL COST FOR: S *side of* **ARDILLA DR** *Starting at:* **MARIPOSA ST** **$84,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121058	ARDILLA DR	MONARCH RD	KNOX ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60199	0.8 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
60186	1.0 to 2.0 feet	**Vertical Change**	.89"	5 ft	5	REF		
60200	24.4 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
60187	31.0 to 32.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
60201	43.7 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
60202	54.2 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
60203	71.8 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
60204	86.9 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
60239	93.3 to 113.1 feet	Key Note Segment		5 ft	99			
60240	120.8 to 140.2 feet	Key Note Segment		5 ft	97			
60188	121.2 to 122.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
60205	141.1 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
60206	164.8 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
60207	170.1 to 173.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
60208	176.3 to 182.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
60241	182.8 to 202.4 feet	Key Note Segment		5 ft	98			
60209	202.9 to 208.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
60242	209.1 to 228.8 feet	Key Note Segment		5 ft	99			
60210	230.5 to 247.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
60189	244.8 to 245.8 feet	**Vertical Change**	.85"	5 ft	5	REF		
60211	247.4 to 252.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
60212	252.3 to 258.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	**$3,840**
60213	259.3 to 262.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
60214	262.3 to 272.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
60243	272.0 to 292.0 feet	Key Note Segment		5 ft	100			
60215	292.2 to 297.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,140**
60244	298.0 to 317.4 feet	Key Note Segment		5 ft	97			
60216	318.6 to 321.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121058	ARDILLA DR	MONARCH RD	KNOX ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60217	324.7 to 333.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
60218	333.9 to 337.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
60219	337.8 to 338.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
60220	338.8 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
60245	360.3 to 381.1 feet	Key Note Segment		5 ft	104			
60190	360.9 to 361.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
60191	380.4 to 381.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
60221	381.3 to 386.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	27	SF	$40	**$1,080**
60246	386.7 to 406.4 feet	Key Note Segment		5 ft	99			
60192	406.0 to 407.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
60222	407.5 to 415.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
60223	420.1 to 441.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
60224	445.9 to 447.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
60247	449.4 to 470.1 feet	Key Note Segment		5 ft	104			
60193	459.6 to 460.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
60225	470.9 to 471.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
60226	474.5 to 475.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
60227	476.7 to 477.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
60248	477.9 to 495.5 feet	Key Note Segment		5 ft	88			
60228	496.3 to 497.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
60229	497.8 to 507.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
60230	507.3 to 533.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,900**
60194	526.6 to 527.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
60231	536.8 to 538.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
60249	538.0 to 558.2 feet	Key Note Segment		5 ft	101			
60232	558.2 to 563.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
60250	563.8 to 585.4 feet	Key Note Segment		5 ft	108			
60233	585.7 to 600.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121058	ARDILLA DR	MONARCH RD	KNOX ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60234	600.9 to 615.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
60195	604.1 to 605.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
60251	615.8 to 630.3 feet	Key Note Segment		5 ft	73			
60196	626.2 to 627.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
60235	630.6 to 634.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
60236	637.9 to 661.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
60197	666.6 to 667.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
60237	668.7 to 690.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
60198	691.9 to 692.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
60238	692.1 to 696.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: N *side of* **ARDILLA DR** *Starting at:* **MONARCH RD** **$205,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271051	ARIES CT	3256 ARIES CT	GLENVILLE AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110478	5.1 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
110488	6.4 to 29.3 feet	Key Note Segment		5 ft	115			
110479	32.7 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
110468	35.6 to 36.6 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
110480	37.3 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
110469	57.6 to 58.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
110470	64.2 to 65.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
110481	69.6 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
110471	78.4 to 79.4 feet	**Vertical Change**	.54"	5 ft	5	REF		
110482	81.6 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
110489	86.2 to 115.9 feet	Key Note Segment		5 ft	149			
110483	120.3 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
110490	128.9 to 156.0 feet	Key Note Segment		5 ft	136			
110472	132.0 to 133.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
110473	145.9 to 146.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
110484	159.4 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
110485	164.7 to 174.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
110486	187.2 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
110474	190.3 to 191.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
110475	203.5 to 204.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
110487	204.7 to 211.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
110491	212.3 to 242.3 feet	Key Note Segment		5 ft	150			
110477	235.8 to 236.8 feet	**Vertical Change**	.63"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ARIES CT** *Starting at:* **3256 ARIES CT** **$49,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271049	ARIES CT	GLENVILLE AVE	3256 ARIES CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110453	0.0 to 5.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
110454	6.6 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
110455	23.2 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,060**
110443	28.4 to 29.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
110456	40.4 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
110465	57.3 to 86.9 feet	Key Note Segment		5 ft	148			
110444	78.3 to 79.3 feet	**Vertical Change**	.69"	5 ft	5	REF		
110457	88.4 to 99.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
110445	88.6 to 89.6 feet	**Vertical Change**	-.44"	5 ft	5	REF		
110446	90.8 to 91.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
110466	102.2 to 136.1 feet	Key Note Segment		5 ft	170			
110447	136.5 to 137.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110458	138.5 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
110448	139.5 to 140.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
110459	151.3 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
110460	160.2 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
110449	165.2 to 166.2 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
110461	167.3 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110462	174.6 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
110463	195.2 to 196.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
110467	197.3 to 219.8 feet	Key Note Segment		5 ft	113			
110450	210.6 to 211.6 feet	**Vertical Change**	-.43"	5 ft	5	REF		
110451	221.2 to 222.2 feet	**Vertical Change**	-.49"	5 ft	5	LF	$75	**$375**
110464	222.3 to 226.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
110452	225.4 to 226.4 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ARIES CT** *Starting at:* **GLENVILLE AVE** **$62,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
EN/W	2201141017	ARTHUR CT	JEFFERSON AVE	JEFFERSON AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100612	0.0 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
100587	8.5 to 9.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
100613	9.9 to 11.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
100588	11.8 to 12.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
100589	16.6 to 19.5 feet	**Vertical Change**	.34"	5 ft	14	REF		
100614	17.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
100590	20.4 to 23.1 feet	**Vertical Change**	-.32"	5 ft	14	LF	$75	**$1,013**
100591	25.3 to 26.3 feet	**Vertical Change**	-.61"	5 ft	5	SF	$75	**$375**
100651	27.7 to 40.8 feet	Key Note Segment		5 ft	65			
100615	40.8 to 48.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	39	SF	$40	**$1,540**
100592	44.9 to 45.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
100616	50.4 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
100652	57.3 to 72.6 feet	Key Note Segment		5 ft	76			
100593	67.1 to 68.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
100617	72.6 to 82.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	49	SF	$40	**$1,960**
100618	88.2 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
100594	104.8 to 105.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
100619	110.5 to 117.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
100653	117.5 to 131.4 feet	Key Note Segment		5 ft	70			
100620	136.7 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100621	139.9 to 144.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
100622	146.3 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
100623	153.2 to 164.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
100624	164.0 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
100625	165.3 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
100626	171.8 to 177.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
100654	178.0 to 193.9 feet	Key Note Segment		5 ft	80			
100627	194.3 to 195.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
EN/W	2201141017	ARTHUR CT	JEFFERSON AVE	JEFFERSON AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100628	196.6 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
100595	198.6 to 199.6 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
100629	214.7 to 218.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460
100630	219.3 to 223.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
100631	233.2 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
100655	248.6 to 263.3 feet	Key Note Segment		5 ft	74			
100632	264.3 to 265.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
100596	267.5 to 268.5 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
100633	273.2 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
100597	274.0 to 275.0 feet	Vertical Change	-.38"	5 ft	5	REF		
100634	281.4 to 284.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
100598	284.8 to 285.8 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
100599	293.3 to 294.3 feet	Vertical Change	.68"	5 ft	5	REF		
100635	293.3 to 295.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260
100660	296.8 to 297.9 feet		5.0-6.0%	5 ft	5			
100636	298.5 to 300.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
100661	301.8 to 303.4 feet		6.0-7.0%	5 ft	8			
100600	302.0 to 303.0 feet	Vertical Change	-2.23"	5 ft	5	SF	$75	$375
100637	303.8 to 305.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
100601	304.0 to 305.0 feet	Vertical Change	.27"	5 ft	5	REF		
100602	306.9 to 307.9 feet	Vertical Change	.68"	5 ft	5	SF	$75	$375
100638	315.9 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
100656	320.0 to 336.2 feet	Key Note Segment		5 ft	81			
100639	337.3 to 343.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
100603	339.9 to 340.9 feet	Vertical Change	-.29"	5 ft	5	REF		
100640	347.3 to 380.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	167	SF	$120	$19,980
100604	361.7 to 362.7 feet	Vertical Change	.28"	5 ft	5	REF		
100605	372.0 to 373.0 feet	Vertical Change	.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
EN/W	2201141017	ARTHUR CT	JEFFERSON AVE	JEFFERSON AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100657	381.6 to 396.2 feet	Key Note Segment		5 ft	73			
100641	397.3 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
100606	399.3 to 400.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
100642	404.2 to 406.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
100643	412.7 to 421.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
100607	426.8 to 427.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
100644	431.7 to 439.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
100608	434.9 to 435.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
100658	440.8 to 454.8 feet	Key Note Segment		5 ft	70			
100609	449.3 to 450.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
100645	455.3 to 457.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
100646	457.8 to 473.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
100610	472.0 to 473.0 feet	**Vertical Change**	-.42"	5 ft	5	REF		
100659	473.6 to 487.3 feet	Key Note Segment		5 ft	69			
100647	489.3 to 492.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
100611	490.4 to 491.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
100648	495.1 to 498.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
100649	498.3 to 499.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
100650	504.1 to 519.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
100662	516.7 to 518.1 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: EN/W *side of* **ARTHUR CT** *Starting at:* **JEFFERSON AVE** **$128,367.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271028	ASHBURY CT	3275 ASHBURY CT	GLENVILLE AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110306	0.6 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
110307	3.3 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
110300	7.3 to 8.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
110301	18.3 to 19.3 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
110315	20.2 to 45.9 feet	Key Note Segment		5 ft	129			
110302	30.4 to 31.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110303	37.0 to 38.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
110308	49.4 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
110309	54.0 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
110316	66.5 to 105.3 feet	Key Note Segment		5 ft	194			
110304	69.8 to 70.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
110310	106.7 to 114.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
110317	117.2 to 147.6 feet	Key Note Segment		5 ft	152			
110311	147.9 to 149.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	8	SF	$40	**$300**
110312	149.6 to 155.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
110313	160.0 to 161.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
110314	164.6 to 177.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
110305	174.0 to 175.0 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ASHBURY CT** *Starting at:* **3275 ASHBURY CT** **$33,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271026	ASHBURY CT	GLADE AVE	3275 ASHBURY CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110276	0.0 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
110277	17.4 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110264	22.8 to 23.8 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
110278	25.3 to 52.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**
110279	56.3 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
110295	60.8 to 95.7 feet	Key Note Segment		5 ft	175			
110265	62.6 to 63.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
110266	96.2 to 97.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110280	98.8 to 118.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
110267	99.8 to 100.8 feet	**Vertical Change**	2.17"	5 ft	5	REF		
110268	104.0 to 105.0 feet	**Vertical Change**	1.76"	5 ft	5	REF		
110281	124.4 to 131.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
110282	135.3 to 139.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
110296	139.4 to 167.5 feet	Key Note Segment		5 ft	141			
110283	169.1 to 178.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
110284	182.3 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
110285	192.1 to 193.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
110286	197.2 to 228.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	156	SF	$120	**$18,660**
110297	228.8 to 258.6 feet	Key Note Segment		5 ft	149			
110269	258.9 to 259.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
110287	260.3 to 265.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
110298	265.3 to 293.4 feet	Key Note Segment		5 ft	140			
110270	267.3 to 268.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
110271	284.8 to 285.8 feet	**Vertical Change**	-.4"	5 ft	5	REF		
110272	291.5 to 294.2 feet	**Vertical Change**	.36"	5 ft	14	REF		
110288	294.2 to 297.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
110289	302.3 to 304.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
110290	307.4 to 309.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271026	ASHBURY CT	GLADE AVE	3275 ASHBURY CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110291	312.5 to 315.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
110292	315.4 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
110273	331.8 to 335.7 feet	**Vertical Change**	.43"	5 ft	20	REF		
110299	332.8 to 360.4 feet	Key Note Segment		5 ft	138			
110275	370.7 to 371.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
110293	375.8 to 379.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
110294	382.9 to 386.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: N *side of* **ASHBURY CT** *Starting at:* **GLADE AVE** **$105,330.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271153	ASHBURY CT	GLENVILLE AVE	GLADE AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111024	1.8 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
111025	6.4 to 12.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
111026	12.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
111020	26.3 to 27.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
111027	27.0 to 38.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
111021	39.2 to 40.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
111028	39.2 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
111029	45.9 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
111030	93.2 to 95.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
111031	97.8 to 100.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
111032	102.6 to 104.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
111033	107.5 to 180.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	363	SF	$120	**$43,560**
111022	115.8 to 116.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
111023	180.1 to 181.1 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ASHBURY CT** *Starting at:* **GLENVILLE AVE** **$91,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021132	ASHLAN WAY	1501 LAKE ST	N LAKE ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117754	7.2 to 9.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **ASHLAN WAY** *Starting at:* **1501 LAKE ST** **$1,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011607	ASHLAN WAY	412 ASHLAN WAY	AUSTIN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117091	0.8 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
117092	16.5 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
117128	21.1 to 38.5 feet	Key Note Segment		4 ft	70			
117093	41.3 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
117129	45.1 to 61.7 feet	Key Note Segment		4 ft	66			
117077	62.9 to 63.9 feet	**Vertical Change**	.47"	4 ft	4	REF		
117094	63.6 to 64.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$576**
117095	65.5 to 67.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	**$720**
117096	67.4 to 69.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$864**
117078	68.6 to 69.6 feet	**Vertical Change**	-.37"	4 ft	4	REF		
117097	73.9 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	63	SF	$120	**$7,584**
117098	91.3 to 93.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	**$1,200**
117099	96.8 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,920**
117079	115.1 to 116.1 feet	**Vertical Change**	-.33"	4 ft	4	LF	$75	**$300**
117100	118.0 to 125.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,504**
117130	126.2 to 144.7 feet	Key Note Segment		4 ft	74			
117080	148.5 to 149.5 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
117131	151.1 to 167.0 feet	Key Note Segment		4 ft	64			
117101	169.0 to 170.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$672**
117081	169.2 to 170.2 feet	**Vertical Change**	.48"	4 ft	4	REF		
117102	170.4 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
117103	187.0 to 189.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$960**
117104	190.3 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
117105	195.0 to 214.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	78	SF	$120	**$9,312**
117082	201.8 to 202.8 feet	**Vertical Change**	.53"	4 ft	4	REF		
117106	214.8 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
117083	218.9 to 219.9 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
117107	220.7 to 231.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011607	ASHLAN WAY	412 ASHLAN WAY	AUSTIN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117132	232.0 to 249.5 feet	Key Note Segment		4 ft	70			
117108	252.9 to 254.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
117133	255.4 to 273.2 feet	Key Note Segment		4 ft	71			
117109	274.9 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117110	280.3 to 281.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
117111	286.3 to 317.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	123	SF	$120	**$14,736**
117084	300.7 to 301.7 feet	Vertical Change	.29"	4 ft	4	REF		
117112	317.8 to 334.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
117134	335.5 to 353.8 feet	Key Note Segment		4 ft	73			
117135	360.3 to 378.2 feet	Key Note Segment		4 ft	72			
117085	365.8 to 366.8 feet	Vertical Change	.32"	4 ft	4	REF		
117086	382.7 to 383.7 feet	Vertical Change	-.3"	4 ft	4	LF	$75	**$300**
117113	388.3 to 389.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
117114	391.8 to 407.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,728**
117115	410.3 to 411.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117116	411.9 to 439.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	112	SF	$120	**$13,392**
117087	437.2 to 438.2 feet	Vertical Change	.26"	4 ft	4	REF		
117136	441.2 to 459.2 feet	Key Note Segment		4 ft	72			
117117	461.0 to 465.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
117137	465.3 to 483.4 feet	Key Note Segment		4 ft	72			
117088	466.3 to 467.3 feet	Vertical Change	.36"	4 ft	4	REF		
117118	485.8 to 489.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
117089	488.7 to 489.7 feet	Vertical Change	-.35"	4 ft	4	REF		
117119	493.6 to 515.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	86	SF	$120	**$10,272**
117090	504.1 to 505.1 feet	Vertical Change	-.26"	4 ft	4	REF		
117140	513.8 to 514.8 feet	Protruding Object	72"	4 ft	4	JOB	$99	**$99**
117120	516.6 to 518.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
117121	520.6 to 531.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	42	SF	$120	**$5,088**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011607	ASHLAN WAY	412 ASHLAN WAY	AUSTIN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117122	533.3 to 538.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
117123	538.6 to 540.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
117138	546.8 to 564.1 feet	Key Note Segment		4 ft	69			
117139	570.4 to 588.3 feet	Key Note Segment		4 ft	72			
117124	592.3 to 597.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
117125	599.1 to 603.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,016**
117126	603.4 to 607.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
117127	607.3 to 624.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	69	SF	$120	**$8,304**

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **412 ASHLAN WAY** **$144,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011600	ASHLAN WAY	AUSTIN AVE	N D ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116992	0.8 to 2.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$864**
116993	3.3 to 6.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	14	SF	$120	**$1,632**
116994	6.7 to 27.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	82	SF	$120	**$9,888**
116974	21.3 to 22.3 feet	**Vertical Change**	.54"	4 ft	4	REF		
116995	27.3 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
116975	31.5 to 32.5 feet	**Vertical Change**	-.62"	4 ft	4	SF	$75	**$300**
116996	36.6 to 37.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
117043	38.4 to 55.5 feet	Key Note Segment		4 ft	68			
116997	58.1 to 74.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	64	SF	$120	**$7,680**
116998	75.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
116999	82.8 to 90.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	**$3,504**
116976	84.2 to 85.2 feet	**Vertical Change**	.3"	4 ft	4	REF		
117044	90.3 to 108.6 feet	Key Note Segment		4 ft	73			
117000	112.9 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
117045	115.6 to 132.8 feet	Key Note Segment		4 ft	69			
116977	137.6 to 138.6 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**
117001	140.8 to 165.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	97	SF	$120	**$11,664**
117002	165.1 to 181.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	66	SF	$120	**$7,968**
117003	182.5 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,896**
116978	188.0 to 189.0 feet	**Vertical Change**	-.34"	4 ft	4	REF		
117004	192.7 to 193.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
117046	195.8 to 213.5 feet	Key Note Segment		4 ft	71			
117005	217.3 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
117047	220.0 to 237.3 feet	Key Note Segment		4 ft	69			
117006	239.0 to 240.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
117007	241.2 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
117008	261.8 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	125	SF	$120	**$14,976**
117009	293.0 to 294.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$576**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011600	ASHLAN WAY	AUSTIN AVE	N D ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117010	296.4 to 301.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
116979	296.6 to 297.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
117048	301.5 to 319.1 feet	Key Note Segment		4 ft	70			
117049	325.7 to 343.2 feet	Key Note Segment		4 ft	70			
116980	326.2 to 327.2 feet	**Vertical Change**	-.8"	4 ft	4	REF		
116981	346.9 to 347.9 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
117011	348.3 to 349.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
117012	351.9 to 365.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	52	SF	$120	**$6,288**
117013	365.8 to 375.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
117058	372.0 to 373.0 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
117014	375.5 to 381.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
117015	381.9 to 398.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,016**
117016	401.8 to 402.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117017	404.1 to 405.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
116982	404.3 to 405.3 feet	**Vertical Change**	3.05"	4 ft	4	REF		
117050	406.7 to 424.7 feet	Key Note Segment		4 ft	72			
117051	431.1 to 447.3 feet	Key Note Segment		4 ft	65			
117018	448.9 to 450.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
116983	451.4 to 452.4 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
117019	462.8 to 464.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
117020	468.6 to 471.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
117021	476.0 to 478.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
117022	483.3 to 485.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
116984	491.5 to 492.5 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
117023	500.6 to 504.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
116985	508.6 to 509.6 feet	**Vertical Change**	.65"	4 ft	4	SF	$75	**$300**
117052	512.7 to 529.3 feet	Key Note Segment		4 ft	66			
117024	531.3 to 532.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011600	ASHLAN WAY	AUSTIN AVE	N D ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116986	534.9 to 535.9 feet	Vertical Change	-.35"	4 ft	4	REF		
117025	535.1 to 536.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$576**
117053	536.5 to 552.4 feet	Key Note Segment		4 ft	64			
117026	554.5 to 555.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117027	558.0 to 559.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117028	560.3 to 578.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	73	SF	$120	**$8,736**
116987	569.7 to 570.7 feet	Vertical Change	3.05"	4 ft	4	REF		
117029	580.8 to 589.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	36	SF	$120	**$4,320**
117030	592.8 to 616.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	93	SF	$120	**$11,136**
116988	614.4 to 615.4 feet	Vertical Change	-.29"	4 ft	4	REF		
117054	618.8 to 634.5 feet	Key Note Segment		4 ft	63			
116989	619.1 to 620.1 feet	Vertical Change	1.16"	4 ft	4	REF		
116990	635.8 to 636.8 feet	Vertical Change	.31"	4 ft	4	LF	$75	**$300**
117055	640.5 to 657.8 feet	Key Note Segment		4 ft	69			
117031	659.7 to 676.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
117032	678.9 to 681.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,152**
117033	682.2 to 696.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,912**
117034	699.9 to 704.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
117035	707.0 to 713.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
117036	713.3 to 716.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
117037	717.5 to 722.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
116991	721.3 to 722.3 feet	Vertical Change	-.27"	4 ft	4	REF		
117056	723.1 to 740.1 feet	Key Note Segment		4 ft	68			
117038	741.4 to 745.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
117057	745.8 to 762.7 feet	Key Note Segment		4 ft	68			
117039	766.2 to 772.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
117040	772.6 to 776.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**
117041	778.6 to 797.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	77	SF	$120	**$9,264**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011600	ASHLAN WAY	AUSTIN AVE	N D ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117042	798.1 to 805.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**

TOTAL COST FOR: N *side of* **ASHLAN WAY** *Starting at:* **AUSTIN AVE** **$180,372.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021319	ASHLAN WAY	AUSTIN AVE	N LAKE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118205	1.2 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,552**
118206	13.9 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
118265	31.9 to 44.7 feet	Key Note Segment		4 ft	51			
118178	32.2 to 33.2 feet	**Vertical Change**	-.27"	4 ft	4	REF		
118207	44.7 to 49.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	19	SF	$40	**$768**
118208	52.4 to 55.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,632**
118266	58.1 to 70.8 feet	Key Note Segment		4 ft	51			
118179	58.8 to 59.8 feet	**Vertical Change**	-.33"	4 ft	4	REF		
118209	70.8 to 72.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	7	SF	$40	**$288**
118210	73.5 to 91.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	72	SF	$120	**$8,688**
118180	89.1 to 90.1 feet	**Vertical Change**	-.48"	4 ft	4	REF		
118211	94.4 to 105.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	43	SF	$120	**$5,184**
118212	105.2 to 107.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
118267	108.1 to 120.3 feet	Key Note Segment		4 ft	49			
118213	120.3 to 122.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$320**
118214	123.9 to 137.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	54	SF	$120	**$6,432**
118181	132.1 to 133.1 feet	**Vertical Change**	3.03"	4 ft	4	REF		
118215	137.3 to 138.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
118216	139.5 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
118182	140.4 to 141.4 feet	**Vertical Change**	.31"	4 ft	4	REF		
118217	143.4 to 149.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,928**
118218	149.5 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
118268	159.2 to 171.6 feet	Key Note Segment		4 ft	50			
118183	171.7 to 172.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
118219	172.8 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,360**
118184	182.3 to 183.3 feet	**Vertical Change**	.28"	4 ft	4	REF		
118185	187.5 to 188.5 feet	**Vertical Change**	.34"	4 ft	4	REF		
118220	194.7 to 197.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021319	ASHLAN WAY	AUSTIN AVE	N LAKE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118221	206.7 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
118186	209.1 to 210.1 feet	**Vertical Change**	1.63"	4 ft	4	REF		
118222	210.2 to 217.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	27	SF	$120	**$3,264**
118269	218.7 to 231.6 feet	Key Note Segment		4 ft	52			
118223	231.6 to 232.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	5	SF	$40	**$208**
118224	233.7 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
118225	245.8 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118270	268.1 to 280.2 feet	Key Note Segment		4 ft	48			
118226	281.1 to 285.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
118187	289.1 to 290.1 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
118188	294.1 to 295.1 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
118189	301.0 to 302.0 feet	**Vertical Change**	.5"	4 ft	4	SF	$75	**$300**
118227	305.4 to 306.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118228	313.7 to 319.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
118271	319.8 to 332.3 feet	Key Note Segment		4 ft	50			
118229	332.3 to 333.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	4 ft	6	SF	$40	**$224**
118230	334.3 to 336.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
118231	336.4 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
118232	348.8 to 350.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
118233	354.3 to 359.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
118234	368.4 to 371.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
118272	377.2 to 390.8 feet	Key Note Segment		4 ft	54			
118235	391.3 to 392.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	6	SF	$40	**$240**
118236	393.7 to 409.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,488**
118237	409.8 to 421.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	**$5,424**
118238	421.1 to 422.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	7	SF	$120	**$816**
118239	424.8 to 430.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	22	SF	$120	**$2,592**
118273	430.3 to 442.3 feet	Key Note Segment		4 ft	48			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021319	ASHLAN WAY	AUSTIN AVE	N LAKE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118240	442.3 to 443.6 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	5	SF	$40	$208
118241	446.1 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	$6,576
118242	459.9 to 463.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	$1,872
118190	464.3 to 465.3 feet	Vertical Change	.68"	4 ft	4	SF	$75	$300
118280	465.5 to 466.7 feet		5.0-6.0%	4 ft	5			
118243	479.9 to 481.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	$576
118244	482.8 to 485.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	$1,200
118274	485.4 to 497.8 feet	Key Note Segment		4 ft	50			
118191	498.4 to 499.4 feet	Vertical Change	.53"	4 ft	4	REF		
118245	498.5 to 511.8 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	53	SF	$40	$2,128
118192	507.1 to 508.1 feet	Vertical Change	-.32"	4 ft	4	REF		
118246	518.3 to 524.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	$2,784
118247	528.5 to 534.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	$2,736
118193	531.2 to 532.2 feet	Vertical Change	.31"	4 ft	4	REF		
118275	540.4 to 553.5 feet	Key Note Segment		4 ft	52			
118248	553.6 to 569.6 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	64	SF	$40	$2,560
118194	554.1 to 555.1 feet	Vertical Change	-.28"	4 ft	4	REF		
118249	571.1 to 585.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	58	SF	$120	$6,960
118195	586.9 to 587.9 feet	Vertical Change	-.33"	4 ft	4	LF	$75	$300
118250	588.8 to 596.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	32	SF	$120	$3,792
118276	596.7 to 609.7 feet	Key Note Segment		4 ft	52			
118251	610.0 to 612.2 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	9	SF	$40	$352
118197	610.1 to 611.1 feet	Vertical Change	.27"	4 ft	4	REF		
118252	625.7 to 644.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	76	SF	$120	$9,168
118198	628.3 to 629.3 feet	Vertical Change	.39"	4 ft	4	REF		
118277	645.2 to 657.5 feet	Key Note Segment		4 ft	49			
118199	646.3 to 647.3 feet	Vertical Change	.35"	4 ft	4	REF		
118253	657.6 to 660.3 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	11	SF	$40	$432

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021319	ASHLAN WAY	AUSTIN AVE	N LAKE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118254	666.9 to 675.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
118200	671.4 to 672.4 feet	**Vertical Change**	.42"	4 ft	4	REF		
118255	679.5 to 680.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118256	684.3 to 685.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
118201	688.0 to 689.0 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**
118257	689.8 to 690.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118202	697.0 to 698.0 feet	**Vertical Change**	.58"	4 ft	4	SF	$75	**$300**
118278	698.3 to 710.0 feet	Key Note Segment		4 ft	47			
118203	699.5 to 700.5 feet	**Vertical Change**	1.67"	4 ft	4	REF		
118258	710.2 to 711.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	7	SF	$40	**$272**
118204	717.1 to 718.1 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
118259	723.1 to 743.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	83	SF	$120	**$9,984**
118260	748.3 to 749.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
118279	750.0 to 763.4 feet	Key Note Segment		4 ft	54			
118261	764.8 to 767.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	11	SF	$120	**$1,296**
118262	768.2 to 783.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
118263	785.6 to 788.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
118264	792.2 to 795.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,392**

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **AUSTIN AVE** **$155,408.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311405	ASHLAN WAY	LUCIA WAY	NOREEN WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115586	0.0 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,360**
115577	6.0 to 7.0 feet	**Vertical Change**	.32"	4 ft	4	REF		
115587	7.0 to 9.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	12	SF	$120	**$1,392**
115588	9.9 to 13.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	16	SF	$120	**$1,872**
115589	13.8 to 15.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	8	SF	$120	**$960**
115578	16.4 to 17.4 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
115590	20.0 to 28.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	36	SF	$120	**$4,272**
115607	28.9 to 47.6 feet	Key Note Segment		4 ft	75			
115579	47.8 to 48.8 feet	**Vertical Change**	.35"	4 ft	4	REF		
115591	51.2 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
115608	55.6 to 74.2 feet	Key Note Segment		4 ft	74			
115580	74.1 to 75.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
115592	84.8 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,288**
115593	97.9 to 112.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,768**
115594	120.5 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,144**
115595	138.8 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
115609	142.7 to 161.3 feet	Key Note Segment		4 ft	74			
115581	161.9 to 162.9 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**
115596	165.3 to 168.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
115610	169.8 to 187.1 feet	Key Note Segment		4 ft	69			
115582	183.4 to 184.4 feet	**Vertical Change**	-.36"	4 ft	4	REF		
115597	189.4 to 196.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,168**
115598	197.2 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
115599	207.3 to 212.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,400**
115583	209.9 to 210.9 feet	**Vertical Change**	.29"	4 ft	4	REF		
115600	213.2 to 225.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	48	SF	$120	**$5,808**
115601	225.8 to 241.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	62	SF	$120	**$7,440**
115602	241.4 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311405	ASHLAN WAY	LUCIA WAY	NOREEN WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115584	241.8 to 242.8 feet	Vertical Change	.33"	4 ft	4	REF		
115611	257.1 to 275.4 feet	Key Note Segment		4 ft	73			
115585	257.5 to 258.5 feet	Vertical Change	-.56"	4 ft	4	REF		
115603	277.3 to 282.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
115612	283.3 to 301.9 feet	Key Note Segment		4 ft	74			
115604	306.8 to 311.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
115605	313.6 to 319.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	24	SF	$120	**$2,832**
115606	319.5 to 334.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	59	SF	$120	**$7,104**

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **LUCIA WAY** **$80,472.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011414	ASHLAN WAY	N D ST	NOREEN WAY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116652	0.8 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
116653	15.6 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,496**
116654	21.4 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,832**
116655	42.3 to 57.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	60	SF	$120	**$7,248**
116656	57.4 to 69.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,904**
116657	73.0 to 79.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$3,024**
116658	79.8 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
116659	94.3 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	100	SF	$120	**$12,000**
116660	119.9 to 127.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	**$3,504**
116661	127.8 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,248**
116651	139.7 to 140.7 feet	**Vertical Change**	-.36"	4 ft	4	REF		
116662	142.9 to 153.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$5,088**
116663	153.5 to 166.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**

TOTAL COST FOR: N *side of* **ASHLAN WAY** *Starting at:* **N D ST** **$68,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011602	ASHLAN WAY	N D ST	408 ASHLAN WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117063	0.1 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
117059	3.7 to 4.7 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
117064	4.8 to 6.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$672**
117065	8.7 to 24.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	62	SF	$120	**$7,488**
117066	24.3 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,128**
117060	36.3 to 40.3 feet	**Vertical Change**	.5"	4 ft	16	SF	$75	**$1,200**
117074	39.1 to 55.4 feet	Key Note Segment		4 ft	65			
117067	58.3 to 61.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
117068	61.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
117075	62.8 to 78.4 feet	Key Note Segment		4 ft	62			
117069	79.5 to 108.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	117	SF	$120	**$14,064**
117070	108.8 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,408**
117071	120.8 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
117072	135.2 to 141.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,928**
117061	141.9 to 142.9 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
117076	143.4 to 161.3 feet	Key Note Segment		4 ft	72			
117062	144.2 to 145.2 feet	**Vertical Change**	-.99"	4 ft	4	REF		
117073	164.3 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **N D ST** **$45,576.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021312	ASHLAN WAY	N LAKE ST	AUSTIN AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118098	0.1 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
118099	12.6 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
118100	20.6 to 27.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
118161	27.5 to 40.6 feet	Key Note Segment		5 ft	66			
118101	40.6 to 42.1 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	8	SF	$40	**$300**
118102	42.6 to 48.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,420**
118103	49.7 to 61.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
118104	61.0 to 72.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
118074	68.9 to 69.9 feet	**Vertical Change**	2.69"	5 ft	5	REF		
118105	72.5 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
118106	83.8 to 86.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
118107	86.1 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
118162	95.1 to 107.4 feet	Key Note Segment		5 ft	62			
118108	108.9 to 110.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
118109	111.2 to 127.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	81	SF	$120	**$9,660**
118110	128.3 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
118111	129.8 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
118163	146.3 to 158.4 feet	Key Note Segment		5 ft	60			
118112	158.4 to 160.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
118075	165.5 to 166.5 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
118113	175.7 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
118076	186.9 to 187.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
118114	192.0 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
118164	194.9 to 207.8 feet	Key Note Segment		5 ft	65			
118077	195.5 to 196.5 feet	**Vertical Change**	-.49"	5 ft	5	REF		
118078	208.5 to 209.5 feet	**Vertical Change**	.62"	5 ft	5	REF		
118115	208.6 to 209.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
118116	225.6 to 242.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021312	ASHLAN WAY	N LAKE ST	AUSTIN AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118079	232.4 to 233.4 feet	Vertical Change	1.1"	5 ft	5	REF		
118117	244.8 to 249.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
118165	250.1 to 262.4 feet	Key Note Segment		5 ft	61			
118118	263.2 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
118080	272.9 to 273.9 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
118119	280.2 to 297.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	$10,200
118081	296.7 to 297.7 feet	Vertical Change	.67"	5 ft	5	REF		
118120	297.2 to 300.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
118166	301.0 to 314.0 feet	Key Note Segment		5 ft	65			
118082	303.9 to 304.9 feet	Vertical Change	2.18"	5 ft	5	REF		
118121	314.2 to 319.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	27	SF	$40	$1,080
118122	320.8 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
118123	325.2 to 339.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,700
118124	343.0 to 348.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
118125	348.5 to 349.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
118126	352.5 to 353.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
118167	353.9 to 365.7 feet	Key Note Segment		5 ft	59			
118127	365.8 to 374.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	42	SF	$40	$1,660
118128	378.6 to 394.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,720
118083	385.2 to 386.2 feet	Vertical Change	.29"	5 ft	5	REF		
118168	401.3 to 415.3 feet	Key Note Segment		5 ft	70			
118129	416.1 to 455.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	199	SF	$120	$23,820
118169	457.4 to 469.4 feet	Key Note Segment		5 ft	60			
118130	469.4 to 488.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	97	SF	$40	$3,880
118131	488.8 to 495.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
118132	504.8 to 506.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
118084	506.0 to 507.0 feet	Vertical Change	2.07"	5 ft	5	REF		
118170	507.1 to 519.8 feet	Key Note Segment		5 ft	63			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021312	ASHLAN WAY	N LAKE ST	AUSTIN AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118085	508.6 to 509.6 feet	Vertical Change	1.81"	5 ft	5	REF		
118133	520.5 to 522.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$360**
118086	520.8 to 521.8 feet	Vertical Change	.35"	5 ft	5	REF		
118134	524.1 to 525.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
118135	525.5 to 527.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
118136	528.5 to 531.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
118137	532.0 to 543.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
118138	543.2 to 558.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	75	SF	$120	**$9,060**
118087	544.1 to 545.1 feet	Vertical Change	-.28"	5 ft	5	REF		
118171	558.3 to 571.2 feet	Key Note Segment		5 ft	65			
118139	575.4 to 589.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	68	SF	$120	**$8,160**
118088	578.1 to 579.1 feet	Vertical Change	.34"	5 ft	5	REF		
118140	589.0 to 590.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
118141	592.7 to 598.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,660**
118142	600.9 to 606.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,540**
118089	606.0 to 607.0 feet	Vertical Change	3.4"	5 ft	5	REF		
118143	607.5 to 610.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
118144	610.2 to 611.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
118172	611.5 to 623.9 feet	Key Note Segment		5 ft	62			
118090	612.3 to 613.3 feet	Vertical Change	.32"	5 ft	5	REF		
118145	625.1 to 630.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
118146	633.1 to 634.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
118147	634.3 to 640.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
118148	641.4 to 652.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,540**
118149	653.0 to 659.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	31	SF	$120	**$3,660**
118173	661.0 to 674.0 feet	Key Note Segment		5 ft	65			
118091	661.8 to 662.8 feet	Vertical Change	-.3"	5 ft	5	REF		
118150	674.4 to 677.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	**$580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021312	ASHLAN WAY	N LAKE ST	AUSTIN AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118151	678.0 to 685.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
118152	686.6 to 694.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,440**
118153	695.1 to 704.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
118092	695.7 to 696.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
118154	708.0 to 713.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
118174	713.7 to 727.4 feet	Key Note Segment		5 ft	69			
118155	728.0 to 731.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
118176	730.8 to 731.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
118156	737.3 to 744.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
118094	745.7 to 746.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
118175	746.3 to 759.0 feet	Key Note Segment		5 ft	64			
118177	752.5 to 753.5 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
118095	753.1 to 754.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
118157	759.5 to 762.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
118096	760.1 to 761.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
118158	762.0 to 778.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
118159	778.6 to 786.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
118097	785.4 to 786.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
118160	788.8 to 792.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: N *side of* **ASHLAN WAY** *Starting at:* **N LAKE ST** **$259,803.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021131	ASHLAN WAY	N LAKE ST	417 N LAKE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117752	0.3 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
117750	3.8 to 4.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
117753	7.8 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
117751	8.2 to 9.2 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **N LAKE ST** **$3,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311407	ASHLAN WAY	NOREEN WAY	POPOLI WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115616	0.0 to 9.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
115617	9.2 to 10.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$624**
115618	11.3 to 14.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	**$1,440**
115619	14.3 to 29.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	61	SF	$120	**$7,344**
115620	30.8 to 71.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	163	SF	$120	**$19,536**
115621	75.5 to 82.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,216**
115622	84.7 to 129.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	179	SF	$120	**$21,504**
115613	95.8 to 96.8 feet	**Vertical Change**	-.27"	4 ft	4	REF		
115623	129.8 to 142.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	51	SF	$120	**$6,144**
115624	142.6 to 146.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	16	SF	$120	**$1,920**
115615	143.4 to 144.4 feet	**Vertical Change**	.32"	4 ft	4	REF		
115625	146.6 to 147.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
115626	147.7 to 150.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	**$1,152**
115627	151.1 to 153.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
115628	154.2 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**

TOTAL COST FOR: N *side of* **ASHLAN WAY** *Starting at:* **NOREEN WAY** **$70,128.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011412	ASHLAN WAY	NOREEN WAY	N D ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116640	1.3 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	53	SF	$120	**$6,336**
116641	15.1 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
116642	19.9 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
116633	28.3 to 29.3 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
116643	33.7 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	101	SF	$120	**$12,096**
116634	45.6 to 46.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
116644	59.2 to 60.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
116645	63.8 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	63	SF	$120	**$7,584**
116635	79.8 to 80.8 feet	**Vertical Change**	-.32"	4 ft	4	REF		
116646	79.8 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,440**
116636	90.2 to 91.2 feet	**Vertical Change**	2.01"	4 ft	4	REF		
116647	101.5 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	**$9,216**
116638	105.8 to 106.8 feet	**Vertical Change**	3.56"	4 ft	4	REF		
116648	129.8 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,896**
116649	155.6 to 157.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
116650	159.3 to 168.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	38	SF	$120	**$4,560**
116639	164.9 to 165.9 feet	**Vertical Change**	.35"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **NOREEN WAY** **$63,468.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311359	ASHLAN WAY	POPOLI WAY	SONORA ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115543	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
115538	0.4 to 1.4 feet	**Vertical Change**	.33"	4 ft	4	REF		
115544	5.4 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
115545	21.6 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**
115546	28.4 to 30.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
115547	32.3 to 73.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	164	SF	$120	**$19,728**
115548	77.7 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$912**
115549	83.9 to 91.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	29	SF	$120	**$3,504**
115550	92.0 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,784**
115551	99.1 to 116.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	**$8,304**
115563	116.4 to 133.8 feet	Key Note Segment		4 ft	70			
115539	116.5 to 117.5 feet	**Vertical Change**	-.31"	4 ft	4	REF		
115552	135.7 to 137.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
115553	137.2 to 141.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
115564	145.8 to 163.9 feet	Key Note Segment		4 ft	72			
115554	168.3 to 176.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,032**
115555	179.4 to 198.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	75	SF	$120	**$8,976**
115540	197.6 to 198.6 feet	**Vertical Change**	-.36"	4 ft	4	REF		
115556	198.1 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
115557	206.6 to 219.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
115558	220.3 to 221.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$720**
115559	222.2 to 224.7 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	10	SF	$120	**$1,200**
115560	229.2 to 230.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$576**
115565	230.4 to 249.1 feet	Key Note Segment		4 ft	75			
115541	231.0 to 232.0 feet	**Vertical Change**	-.26"	4 ft	4	REF		
115542	249.2 to 250.2 feet	**Vertical Change**	.77"	4 ft	4	REF		
115561	254.3 to 303.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	195	SF	$120	**$23,424**
115562	303.1 to 331.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	112	SF	$120	**$13,392**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311359	ASHLAN WAY	POPOLI WAY	SONORA ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **ASHLAN WAY**	*Starting at:* **POPOLI WAY**					**$106,992.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311402	ASHLAN WAY	SONORA ST	LUCIA WAY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115568	1.3 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
115569	4.3 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,920**
115570	11.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,480**
115566	25.5 to 26.5 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
115571	27.5 to 28.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
115572	28.5 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	242	SF	$120	**$29,040**
115576	89.5 to 110.6 feet	Key Note Segment		4 ft	84			
115573	113.1 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	87	SF	$120	**$10,416**
115567	121.4 to 122.4 feet	**Vertical Change**	.27"	4 ft	4	REF		
115574	138.4 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
115575	148.3 to 175.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	108	SF	$120	**$12,960**

TOTAL COST FOR: S *side of* **ASHLAN WAY** *Starting at:* **SONORA ST** **$67,548.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171157	ASILOMAR DR	HOWARD RD	MARINA DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89256	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
89257	4.1 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
89258	25.3 to 47.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,020**
89253	35.1 to 36.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
89254	49.9 to 50.9 feet	**Vertical Change**	.63"	5 ft	5	REF		
89259	50.0 to 51.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
89260	51.5 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
89261	61.4 to 62.7 feet		5.0-6.0%	5 ft	7			
89262	62.7 to 64.1 feet		6.0-7.0%	5 ft	7			
89255	64.1 to 65.1 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ASILOMAR DR** *Starting at:* **HOWARD RD** **$33,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171218	ASILOMAR DR	MANRESA DR	SAN JUAN DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89459	1.8 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
89457	8.1 to 9.1 feet	**Vertical Change**	.6"	5 ft	5	REF		
89460	13.5 to 27.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
89461	27.8 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
89462	63.6 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
89463	76.1 to 77.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89464	80.1 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89465	88.9 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
89466	99.9 to 106.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
89467	109.6 to 113.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
89468	116.4 to 146.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$17,940**

TOTAL COST FOR: E *side of* **ASILOMAR DR** *Starting at:* **MANRESA DR** **$62,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171204	ASILOMAR DR	MARINA DR	SEASIDE DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89328	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
89329	4.8 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	234	SF	$120	**$28,020**
89324	47.1 to 48.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
89325	54.3 to 55.3 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
89330	58.7 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
89331	78.6 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89332	83.5 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
89333	97.8 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89326	101.3 to 102.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
89334	103.6 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
89327	128.3 to 129.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
89335	129.8 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
89336	146.2 to 148.9 feet		5.0-6.0%	5 ft	14			
89337	146.2 to 148.9 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: E *side of* **ASILOMAR DR** *Starting at:* **MARINA DR** **$51,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171149	ASILOMAR DR	POINT SUR DR	HOWARD RD	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89136	0.6 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
89137	3.6 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
89188	9.2 to 28.8 feet	Key Note Segment		5 ft	98			
89100	9.5 to 10.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
89101	19.3 to 20.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
89138	29.5 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89139	34.8 to 36.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
89102	36.6 to 37.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
89140	36.6 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
89103	46.5 to 47.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
89189	59.8 to 78.7 feet	Key Note Segment		5 ft	95			
89104	68.8 to 69.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
89141	80.1 to 81.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
89142	81.9 to 83.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
89105	82.9 to 83.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
89143	83.7 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
89106	91.3 to 92.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
89144	92.4 to 93.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
89145	96.3 to 103.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
89107	102.5 to 103.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
89190	103.7 to 132.6 feet	Key Note Segment		5 ft	145			
89146	133.4 to 139.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,280**
89108	139.9 to 140.9 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
89191	139.9 to 159.3 feet	Key Note Segment		5 ft	97			
89109	150.8 to 151.8 feet	**Vertical Change**	-.41"	5 ft	5	REF		
89147	165.4 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
89148	173.4 to 193.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
89192	193.3 to 223.8 feet	Key Note Segment		5 ft	153			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171149	ASILOMAR DR	POINT SUR DR	HOWARD RD	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89110	222.7 to 223.7 feet	Vertical Change	.38"	5 ft	5	REF		
89149	226.5 to 233.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
89150	234.1 to 243.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	$5,760
89151	245.6 to 257.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,020
89111	248.2 to 249.2 feet	Vertical Change	.27"	5 ft	5	REF		
89152	259.6 to 264.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
89193	264.6 to 293.7 feet	Key Note Segment		5 ft	145			
89112	274.9 to 275.9 feet	Vertical Change	.32"	5 ft	5	REF		
89113	283.5 to 284.5 feet	Vertical Change	.27"	5 ft	5	REF		
89153	295.1 to 301.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
89114	298.8 to 299.8 feet	Vertical Change	.28"	5 ft	5	REF		
89154	301.4 to 307.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
89155	310.7 to 319.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
89194	319.3 to 348.5 feet	Key Note Segment		5 ft	146			
89115	332.5 to 333.5 feet	Vertical Change	-.26"	5 ft	5	REF		
89116	339.3 to 340.3 feet	Vertical Change	-.38"	5 ft	5	REF		
89156	353.2 to 355.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	$1,140
89195	355.7 to 377.8 feet	Key Note Segment		5 ft	111			
89157	378.8 to 408.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	$17,580
89158	412.8 to 420.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
89207	423.8 to 424.9 feet		5.0-6.0%	5 ft	6			
89117	424.0 to 425.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
89159	425.6 to 433.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,920
89196	433.8 to 455.6 feet	Key Note Segment		5 ft	109			
89160	455.7 to 458.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	$580
89161	461.2 to 465.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
89197	465.2 to 494.3 feet	Key Note Segment		5 ft	146			
89118	484.1 to 485.1 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171149	ASILOMAR DR	POINT SUR DR	HOWARD RD	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89119	494.5 to 495.5 feet	Vertical Change	.28"	5 ft	5	REF		
89162	497.0 to 513.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	$10,140
89163	515.8 to 532.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,780
89198	532.1 to 561.2 feet	Key Note Segment		5 ft	146			
89120	545.1 to 546.1 feet	Vertical Change	.26"	5 ft	5	REF		
89164	565.7 to 566.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
89165	566.8 to 580.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,280
89121	575.7 to 576.7 feet	Vertical Change	.53"	5 ft	5	REF		
89166	580.9 to 594.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	$8,100
89199	597.2 to 616.8 feet	Key Note Segment		5 ft	98			
89167	618.7 to 624.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
89200	624.3 to 643.9 feet	Key Note Segment		5 ft	98			
89122	634.7 to 635.7 feet	Vertical Change	.32"	5 ft	5	REF		
89168	645.6 to 647.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
89169	648.1 to 657.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
89170	660.0 to 676.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,840
89171	677.1 to 691.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	$8,460
89123	682.5 to 683.5 feet	Vertical Change	-.29"	5 ft	5	REF		
89172	693.9 to 696.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	$1,380
89201	696.3 to 725.3 feet	Key Note Segment		5 ft	145			
89124	707.3 to 708.3 feet	Vertical Change	.32"	5 ft	5	REF		
89173	728.3 to 731.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
89202	732.3 to 754.2 feet	Key Note Segment		5 ft	110			
89125	749.1 to 750.1 feet	Vertical Change	.31"	5 ft	5	REF		
89174	755.6 to 772.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	$9,900
89126	763.3 to 764.3 feet	Vertical Change	.39"	5 ft	5	REF		
89175	774.3 to 789.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,120
89176	789.5 to 794.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171149	ASILOMAR DR	POINT SUR DR	HOWARD RD	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89177	796.6 to 806.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
89203	806.1 to 834.5 feet	Key Note Segment		5 ft	142			
89127	824.7 to 825.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
89178	836.4 to 837.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89128	839.8 to 840.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
89179	839.8 to 841.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
89204	841.8 to 861.8 feet	Key Note Segment		5 ft	100			
89129	852.6 to 853.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
89180	862.8 to 869.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
89181	870.3 to 879.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
89130	877.0 to 878.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
89182	885.3 to 896.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
89183	899.3 to 908.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
89131	900.2 to 901.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
89132	904.1 to 905.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
89205	909.0 to 938.6 feet	Key Note Segment		5 ft	148			
89133	920.5 to 921.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
89184	942.9 to 948.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
89134	948.7 to 949.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
89185	948.8 to 951.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
89206	952.1 to 980.9 feet	Key Note Segment		5 ft	144			
89186	981.0 to 984.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
89187	987.2 to 996.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
89135	995.1 to 996.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ASILOMAR DR** *Starting at:* **POINT SUR DR** **$240,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171225	ASILOMAR DR	SAN JUAN DR	POINT SUR DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89524	0.4 to 33.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,740**
89522	15.6 to 16.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
89525	40.7 to 45.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
89523	43.8 to 44.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
89531	45.2 to 46.9 feet		5.0-6.0%	5 ft	9			
89526	46.0 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
89527	61.4 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	**$13,920**
89528	86.9 to 111.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
89529	116.2 to 120.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
89530	123.2 to 148.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,420**

TOTAL COST FOR: E *side of* **ASILOMAR DR** *Starting at:* **SAN JUAN DR** **$78,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171210	ASILOMAR DR	SEASIDE DR	MANRESA DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89395	13.1 to 14.1 feet	Vertical Change	-.51"	5 ft	5	SF	$75	**$375**
89399	22.5 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
89396	28.3 to 29.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
89397	41.7 to 42.7 feet	Vertical Change	-.39"	5 ft	5	LF	$75	**$375**
89400	43.2 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
89401	58.9 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
89402	64.8 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
89403	75.0 to 104.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
89404	109.1 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
89405	122.6 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: E *side of* **ASILOMAR DR** *Starting at:* **SEASIDE DR** **$30,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141012	ASPEN LN	2392 BEECHWOOD WAY	BEECHWOOD WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64960	1.8 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
64961	5.1 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
64959	6.5 to 7.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
64962	47.3 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
64963	75.7 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
64964	82.3 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: E *side of* **ASPEN LN** *Starting at:* **2392 BEECHWOOD WAY** **$35,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109131322	ASPEN LN	BEECHWOOD WAY	GRAPEWOOD WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63037	2.4 to 3.4 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
63044	18.7 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
63038	28.3 to 29.3 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
63045	35.4 to 37.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
63039	52.0 to 53.0 feet	Vertical Change	-.64"	5 ft	5	SF	$75	$375
63046	66.8 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
63047	79.3 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$8,940
63040	92.7 to 93.7 feet	Vertical Change	.68"	5 ft	5	REF		
63041	97.4 to 98.4 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
63042	108.0 to 109.0 feet	Vertical Change	-.51"	5 ft	5	SF	$75	$375
63048	126.5 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
63043	135.3 to 136.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
63049	138.2 to 141.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
63050	142.2 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060

TOTAL COST FOR: E *side of* **ASPEN LN** *Starting at:* **BEECHWOOD WAY** **$24,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150756	ASPEN LN	BEECHWOOD WAY	MEADOWREST WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66119	0.1 to 1.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
66120	4.3 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
66121	7.8 to 11.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
66122	12.2 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
66113	12.5 to 13.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
66123	14.6 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
66124	21.8 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
66125	29.8 to 61.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	159	SF	$120	**$19,080**
66114	61.0 to 62.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
66126	65.0 to 82.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
66127	91.1 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66128	93.1 to 94.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
66129	100.8 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
66130	105.9 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
66131	109.3 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
66132	120.7 to 136.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
66115	123.3 to 124.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
66116	132.3 to 133.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
66133	136.3 to 151.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
66117	152.5 to 153.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
66134	154.2 to 155.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
66135	157.9 to 163.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
66118	162.4 to 163.4 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ASPEN LN** *Starting at:* **BEECHWOOD WAY** **$70,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109131243	ASPEN LN	FOXGLOVE WAY	PLUMWOOD WAY	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62501	1.5 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
62502	16.5 to 20.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
62503	23.2 to 25.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
62504	26.4 to 29.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
62505	32.2 to 33.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
62506	37.6 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
62498	55.5 to 56.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
62507	75.0 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
62508	78.1 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
62509	91.4 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
62499	106.8 to 107.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
62510	133.7 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
62511	149.3 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
62500	157.3 to 158.3 feet	**Vertical Change**	1.96"	5 ft	5	REF		
62514	158.1 to 159.1 feet		5.0-6.0%	5 ft	5			
62512	166.5 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
62513	166.8 to 167.8 feet	**Protruding Object**	75"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: W *side of* **ASPEN LN** *Starting at:* **FOXGLOVE WAY** **$69,354.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141036	ASPEN LN	GRAPEWOOD WAY	FOXGLOVE WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65117	27.2 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
65118	47.7 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
65119	69.2 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
65120	86.7 to 89.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
65121	89.2 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
65142	94.5 to 116.5 feet	Key Note Segment		5 ft	110			
65122	116.7 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
65123	123.3 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
65124	137.7 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
65108	163.9 to 164.9 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
65143	175.3 to 190.2 feet	Key Note Segment		5 ft	75			
65125	190.6 to 192.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
65126	194.5 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
65109	198.8 to 199.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
65144	205.8 to 221.3 feet	Key Note Segment		5 ft	78			
65127	223.3 to 224.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
65128	225.0 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
65129	228.9 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
65110	232.4 to 233.4 feet	**Vertical Change**	1.34"	5 ft	5	REF		
65130	262.2 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
65131	269.0 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
65145	281.4 to 298.3 feet	Key Note Segment		5 ft	85			
65132	298.3 to 314.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	82	SF	$40	**$3,260**
65111	298.7 to 299.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
65146	314.6 to 330.3 feet	Key Note Segment		5 ft	78			
65133	330.5 to 336.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,200**
65134	336.5 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
65135	347.6 to 348.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141036	ASPEN LN	GRAPEWOOD WAY	FOXGLOVE WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65136	351.1 to 355.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
65137	355.4 to 356.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
65138	358.9 to 360.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
65147	365.2 to 380.6 feet	Key Note Segment		5 ft	77			
65139	380.6 to 384.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
65140	386.9 to 409.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
65112	395.5 to 396.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
65148	409.9 to 423.5 feet	Key Note Segment		5 ft	68			
65113	419.2 to 420.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
65114	425.2 to 426.2 feet	**Vertical Change**	1.58"	5 ft	5	SF	$75	**$375**
65141	441.4 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
65115	447.4 to 448.4 feet	**Vertical Change**	.65"	5 ft	5	REF		
65116	450.5 to 451.5 feet	**Vertical Change**	.95"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ASPEN LN** *Starting at:* **GRAPEWOOD WAY** **$105,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109131308	ASPEN LN	GRAPEWOOD WAY	BEECHWOOD WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62867	1.3 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
62863	6.3 to 7.3 feet	**Vertical Change**	-.46"	5 ft	5	REF		
62868	6.8 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62869	19.3 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62870	21.4 to 25.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
62871	28.9 to 36.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
62864	36.3 to 37.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
62865	41.0 to 42.0 feet	**Vertical Change**	-.45"	5 ft	5	REF		
62872	41.2 to 44.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
62873	44.8 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
62874	59.4 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,340**
62875	106.3 to 131.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
62866	112.3 to 113.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
62876	133.2 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
62877	143.9 to 159.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
62878	159.4 to 164.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: W *side of* **ASPEN LN** *Starting at:* **GRAPEWOOD WAY** **$76,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150758	ASPEN LN	MEADOWREST WAY	W CLEVELAND AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66137	0.9 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
66138	4.5 to 5.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
66139	5.8 to 7.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
66136	7.3 to 8.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
66140	10.6 to 12.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
66141	16.7 to 25.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,220**
66142	25.4 to 38.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
66143	39.0 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
66144	45.9 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**

TOTAL COST FOR: W *side of* **ASPEN LN** *Starting at:* **MEADOWREST WAY** **$36,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109131256	ASPEN LN	PLUMWOOD WAY	GRAPEWOOD WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62708	1.2 to 15.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
62703	13.1 to 14.1 feet	**Vertical Change**	-1.71"	5 ft	5	REF		
62709	18.1 to 19.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
62710	23.8 to 28.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
62711	30.9 to 34.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
62712	36.9 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
62713	45.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
62714	59.4 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
62705	73.1 to 74.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
62715	76.6 to 79.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
62706	79.7 to 80.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
62716	94.9 to 99.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
62717	100.6 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
62718	131.2 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
62707	157.4 to 158.4 feet	**Vertical Change**	.54"	5 ft	5	REF		
62719	157.9 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
62720	177.8 to 182.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: W *side of* **ASPEN LN** *Starting at:* **PLUMWOOD WAY** **$51,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141011	ASPEN LN	W CLEVELAND AVE	2425 ASPEN LN	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64949	0.0 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
64950	12.6 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64951	17.1 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
64952	50.9 to 55.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
64953	55.5 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
64954	66.0 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
64955	75.6 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
64948	78.9 to 79.9 feet	**Vertical Change**	.93"	5 ft	5	REF		
64956	91.6 to 95.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
64957	97.9 to 101.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
64958	101.4 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	300	SF	$120	**$35,940**

TOTAL COST FOR: E *side of* **ASPEN LN** *Starting at:* **W CLEVELAND AVE** **$86,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311423	ASTI WAY	226 ASTI WAY	LUCIA WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115741	0.9 to 15.4 feet	Key Note Segment		5 ft	73			
115722	15.8 to 16.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
115723	31.4 to 32.4 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
115733	46.3 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
115724	46.8 to 47.8 feet	Vertical Change	-.26"	5 ft	5	REF		
115742	51.9 to 67.0 feet	Key Note Segment		5 ft	76			
115725	60.4 to 61.4 feet	Vertical Change	-.26"	5 ft	5	REF		
115726	65.6 to 66.6 feet	Vertical Change	2.83"	5 ft	5	REF		
115734	71.1 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
115743	76.5 to 90.8 feet	Key Note Segment		5 ft	72			
115735	93.5 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
115727	101.6 to 102.6 feet	Vertical Change	2.02"	5 ft	5	REF		
115736	105.1 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
115737	113.0 to 126.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	$8,340
115738	127.5 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$10,020
115746	145.8 to 146.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
115744	149.0 to 163.3 feet	Key Note Segment		5 ft	72			
115728	150.3 to 151.3 feet	Vertical Change	-.44"	5 ft	5	REF		
115739	164.6 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
115747	170.7 to 171.7 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
115745	174.0 to 187.8 feet	Key Note Segment		5 ft	69			
115729	174.7 to 175.7 feet	Vertical Change	.3"	5 ft	5	REF		
115730	182.2 to 183.2 feet	Vertical Change	-.47"	5 ft	5	REF		
115731	188.9 to 189.9 feet	Vertical Change	.77"	5 ft	5	SF	$75	$375
115732	199.9 to 200.9 feet	Vertical Change	-.92"	5 ft	5	REF		
115740	200.6 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
115748	207.1 to 208.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **ASTI WAY** *Starting at:* **226 ASTI WAY** **$42,003.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311421	ASTI WAY	LUCIA WAY	226 ASTI WAY	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115707	1.2 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
115720	4.6 to 5.8 feet		5.0-6.0%	5 ft	6			
115701	5.5 to 6.5 feet	**Vertical Change**	2.41"	5 ft	5	SF	$75	**$375**
115716	17.2 to 31.5 feet	Key Note Segment		5 ft	72			
115708	33.0 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
115709	52.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
115702	55.3 to 56.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
115710	61.6 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115717	67.0 to 82.6 feet	Key Note Segment		5 ft	78			
115711	83.7 to 91.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
115718	93.7 to 107.7 feet	Key Note Segment		5 ft	70			
115712	107.7 to 115.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,620**
115703	115.1 to 116.1 feet	**Vertical Change**	.72"	5 ft	5	REF		
115713	131.2 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
115704	134.6 to 135.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
115714	145.7 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
115705	149.1 to 150.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
115719	153.0 to 168.3 feet	Key Note Segment		5 ft	77			
115706	154.0 to 155.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
115715	168.8 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: S *side of* **ASTI WAY** *Starting at:* **LUCIA WAY** **$27,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011426	ASTI WAY	N D ST	NOREEN WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116740	3.1 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$2,976**
116741	13.0 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,264**
116742	19.8 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
116743	29.9 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,032**
116744	39.2 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,248**
116745	55.1 to 57.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,296**
116746	60.1 to 95.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	142	SF	$120	**$17,040**
116747	95.9 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
116748	101.0 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	109	SF	$120	**$13,104**
116739	121.7 to 122.7 feet	**Vertical Change**	.39"	4 ft	4	REF		
116749	131.3 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
116750	147.7 to 154.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	28	SF	$120	**$3,408**

TOTAL COST FOR: N *side of* **ASTI WAY** *Starting at:* **N D ST** **$64,368.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011424	ASTI WAY	NOREEN WAY	N D ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116730	0.1 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
116731	3.2 to 5.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	11	SF	$120	**$1,296**
116732	5.9 to 30.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	98	SF	$120	**$11,712**
116725	13.6 to 14.6 feet	**Vertical Change**	.35"	4 ft	4	REF		
116726	29.0 to 30.0 feet	**Vertical Change**	.45"	4 ft	4	REF		
116733	31.8 to 49.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	70	SF	$120	**$8,352**
116727	46.7 to 47.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
116734	54.3 to 62.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	32	SF	$120	**$3,792**
116735	63.4 to 79.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	64	SF	$120	**$7,728**
116728	80.7 to 81.7 feet	**Vertical Change**	.54"	4 ft	4	SF	$75	**$300**
116736	83.9 to 99.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	**$7,632**
116737	101.9 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	163	SF	$120	**$19,584**
116729	112.9 to 113.9 feet	**Vertical Change**	-.85"	4 ft	4	SF	$75	**$300**
116738	143.0 to 163.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	83	SF	$120	**$9,984**

TOTAL COST FOR: S *side of* **ASTI WAY** *Starting at:* **NOREEN WAY** **$72,168.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071625	AUSTIN AVE	1025 AUSTIN AVE	E CLEVELAND AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44596	0.9 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
44605	10.2 to 38.8 feet	Key Note Segment		5 ft	143			
44597	38.8 to 40.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
44598	42.9 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
44599	65.5 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
44600	70.3 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
44601	85.6 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
44602	110.8 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
44603	121.6 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
44604	130.6 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **1025 AUSTIN AVE** **$43,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011625	AUSTIN AVE	1326 AUSTIN AVE	1316 AUSTIN AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117253	1.0 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
117250	12.5 to 13.5 feet	**Vertical Change**	.66"	5 ft	5	REF		
117254	14.3 to 27.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
117255	31.0 to 33.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
117257	33.9 to 51.2 feet	Key Note Segment		5 ft	87			
117251	51.7 to 52.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
117256	53.8 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
117252	57.2 to 58.2 feet	**Vertical Change**	-.47"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **1326 AUSTIN AVE** **$19,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011653	AUSTIN AVE	621 E CLARK ST	E CLARK ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117317	0.8 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
117318	2.7 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
117319	6.3 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
117320	24.1 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117314	31.6 to 32.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
117321	33.9 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
117322	46.9 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
117315	56.1 to 57.1 feet	**Vertical Change**	2.9"	5 ft	5	SF	$75	**$375**
117323	57.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
117324	66.9 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
117329	69.9 to 70.9 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
117316	70.8 to 74.6 feet	**Vertical Change**	.31"	5 ft	19	REF		
117325	72.3 to 74.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
117326	75.0 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
117327	78.9 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
117328	83.8 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
117330	86.7 to 89.7 feet		5.0-6.0%	5 ft	15			
117331	86.7 to 89.7 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **621 E CLARK ST** **$23,949.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021058	AUSTIN AVE	700 GREEN WAY	GREEN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117523	2.8 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,740**
117524	38.0 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
117525	41.0 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
117526	57.1 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **700 GREEN WAY** **$35,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011635	AUSTIN AVE	ASHLAN WAY	701 ASHLAN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117307	3.1 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
117312	20.4 to 21.4 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
117305	36.3 to 37.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
117308	45.8 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117311	52.3 to 53.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117306	58.2 to 59.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
117309	64.0 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
117310	69.8 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **ASHLAN WAY** **$17,769.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011609	AUSTIN AVE	ASHLAN WAY	JAMES WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117143	0.0 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
117141	2.9 to 3.9 feet	**Vertical Change**	-.28"	4 ft	4	REF		
117144	9.2 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
117145	14.9 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	150	SF	$120	**$18,000**
117146	57.5 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117147	77.2 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	**$9,264**
117148	98.9 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	102	SF	$120	**$12,192**
117142	110.0 to 111.0 feet	**Vertical Change**	1.13"	4 ft	4	REF		
117149	127.4 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
117150	133.2 to 148.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	60	SF	$120	**$7,248**
117151	144.8 to 145.9 feet		5.0-6.0%	4 ft	4			
117152	145.9 to 148.3 feet		6.0-7.0%	4 ft	10			

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **ASHLAN WAY** **$53,424.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011554	AUSTIN AVE	E CLARK ST	ASHLAN WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116960	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
116973	2.2 to 3.2 feet	Continuous Width	20"	4 ft	4	SF	$120	**$480**
116961	2.3 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	122	SF	$120	**$14,640**
116955	4.6 to 5.6 feet	Vertical Change	3.45"	4 ft	4	REF		
116956	6.8 to 7.8 feet	Vertical Change	3.07"	4 ft	4	REF		
116957	9.1 to 10.1 feet	Vertical Change	2.71"	4 ft	4	REF		
116958	11.4 to 14.7 feet	Vertical Change	2.45"	4 ft	13	REF		
116959	18.2 to 19.2 feet	Vertical Change	-.27"	4 ft	4	REF		
116962	32.8 to 47.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	60	SF	$120	**$7,248**
116963	50.0 to 51.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$720**
116964	53.6 to 61.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	**$3,792**
116965	63.8 to 69.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,880**
116966	71.0 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
116967	80.3 to 93.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
116968	93.0 to 122.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	119	SF	$120	**$14,256**
116969	126.3 to 139.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	52	SF	$120	**$6,240**
116970	139.3 to 143.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
116971	146.3 to 149.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
116972	152.2 to 154.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **E CLARK ST** **$64,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031433	AUSTIN AVE	E LINCOLN AVE	W SOUTH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120641	0.3 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120642	6.0 to 11.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
120643	11.2 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,060**
120644	53.8 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
120645	62.3 to 65.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
120646	68.6 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
120628	77.3 to 78.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
120647	81.0 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120648	84.8 to 89.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
120649	89.3 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
120650	102.4 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
120651	108.8 to 116.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
120652	116.8 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	320	SF	$120	**$38,400**
120653	184.0 to 189.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
120654	189.3 to 204.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
120655	207.0 to 231.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
120629	209.2 to 210.2 feet	**Vertical Change**	1.08"	5 ft	5	REF		
120630	223.8 to 224.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
120656	231.8 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,260**
120631	233.9 to 234.9 feet	**Vertical Change**	.83"	5 ft	5	REF		
120632	248.0 to 249.0 feet	**Vertical Change**	-.58"	5 ft	5	REF		
120633	253.7 to 254.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
120634	269.8 to 270.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
120635	273.7 to 274.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
120636	285.7 to 286.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
120657	292.3 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
120658	300.8 to 301.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
120659	302.8 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031433	AUSTIN AVE	E LINCOLN AVE	W SOUTH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120637	306.4 to 307.4 feet	Vertical Change	.44"	5 ft	5	REF		
120638	311.4 to 312.4 feet	Vertical Change	.79"	5 ft	5	REF		
120639	313.4 to 314.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
120660	320.8 to 324.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
120661	325.0 to 331.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
120662	333.8 to 337.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
120663	337.5 to 347.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
120640	338.9 to 339.9 feet	Vertical Change	.54"	5 ft	5	REF		
120664	350.1 to 352.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **E LINCOLN AVE** **$184,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031406	AUSTIN AVE	E RIVERSIDE DR	W SOUTH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120456	1.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
120457	6.3 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
120458	21.8 to 51.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	**$17,820**
120447	39.5 to 40.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
120459	54.3 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
120448	62.0 to 63.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
120460	68.8 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
120461	72.6 to 76.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
120462	80.0 to 82.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
120463	83.2 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120449	83.9 to 86.7 feet	**Vertical Change**	.31"	5 ft	14	REF		
120464	92.1 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
120450	93.2 to 94.2 feet	**Vertical Change**	3.44"	5 ft	5	REF		
120465	106.8 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120451	113.6 to 114.6 feet	**Vertical Change**	.63"	5 ft	5	REF		
120466	114.3 to 120.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
120467	121.3 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
120452	123.7 to 124.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
120471	131.8 to 145.0 feet	Key Note Segment		5 ft	66			
120453	145.5 to 146.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
120454	149.3 to 150.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
120468	149.3 to 166.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,380**
120455	159.7 to 160.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
120472	182.5 to 194.8 feet	Key Note Segment		5 ft	62			
120469	198.8 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
120473	229.3 to 244.5 feet	Key Note Segment		5 ft	76			
120470	246.3 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **E RIVERSIDE DR** **$90,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021441	AUSTIN AVE	GREEN WAY	W SHERWOOD WAY	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118883	1.1 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
118884	48.3 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
118885	62.3 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
118886	74.3 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
118887	81.8 to 84.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
118888	85.4 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
118877	87.8 to 88.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
118894	97.5 to 122.2 feet	Key Note Segment		5 ft	124			
118878	113.8 to 114.8 feet	**Vertical Change**	.45"	5 ft	5	REF		
118895	122.2 to 123.5 feet		5.0-6.0%	5 ft	7			
118879	122.9 to 123.9 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
118889	128.7 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
118890	134.6 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
118891	142.8 to 172.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,820**
118892	172.7 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
118893	188.3 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
118880	198.3 to 199.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
118881	217.6 to 218.6 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
118882	224.8 to 225.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **GREEN WAY** **$64,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011633	AUSTIN AVE	JAMES WAY	ASHLAN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117293	0.0 to 11.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
117294	20.2 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
117295	31.6 to 34.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
117296	35.1 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
117297	39.0 to 42.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
117298	42.9 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
117299	65.5 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
117300	86.7 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117301	89.2 to 130.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,480**
117291	93.3 to 94.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
117302	133.2 to 141.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
117303	141.6 to 145.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,460**
117304	146.0 to 147.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **JAMES WAY** **$77,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021609	AUSTIN AVE	RUSH ST	924 AUSTIN AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118957	21.3 to 22.3 feet	Vertical Change	-.31"	5 ft	5	LF	$75	**$375**
118958	27.6 to 28.6 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
118968	40.8 to 49.5 feet	Key Note Segment		5 ft	44			
118962	74.3 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
118969	80.3 to 92.4 feet	Key Note Segment		5 ft	61			
118963	93.5 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
118959	96.0 to 98.6 feet	Vertical Change	.43"	5 ft	13	LF	$75	**$975**
118964	98.2 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
118965	102.7 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
118966	112.1 to 124.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
118960	114.9 to 115.9 feet	Vertical Change	-.27"	5 ft	5	REF		
118970	126.0 to 133.5 feet	Key Note Segment		5 ft	38			
118961	134.2 to 135.2 feet	Vertical Change	.41"	5 ft	5	REF		
118967	135.7 to 139.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **RUSH ST** **$16,845.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011629	AUSTIN AVE	W SHERWOOD WAY	WESSMITH WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117265	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117258	17.0 to 18.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
117266	20.0 to 26.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
117267	28.3 to 31.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
117268	31.5 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
117269	51.3 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
117259	69.2 to 70.2 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
117270	71.4 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
117271	77.8 to 80.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
117272	82.9 to 88.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
117273	88.3 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
117274	110.8 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
117283	135.9 to 158.3 feet	Key Note Segment		5 ft	112			
117275	158.8 to 161.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
117260	159.7 to 160.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
117276	165.2 to 179.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,580**
117277	180.3 to 181.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
117278	182.0 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
117279	210.8 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
117261	224.7 to 225.7 feet	**Vertical Change**	3.27"	5 ft	5	REF		
117262	227.6 to 228.6 feet	**Vertical Change**	1.85"	5 ft	5	REF		
117263	231.7 to 232.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
117280	235.6 to 242.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
117264	244.0 to 245.0 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
117281	245.1 to 251.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
117282	251.5 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **W SHERWOOD WAY** **$92,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031429	AUSTIN AVE	W SOUTH ST	E LINCOLN AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120594	4.3 to 5.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
120599	16.4 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
120600	35.5 to 52.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	$10,200
120595	45.2 to 46.2 feet	Vertical Change	.26"	5 ft	5	REF		
120621	52.8 to 65.3 feet	Key Note Segment		5 ft	63			
120601	68.5 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
120602	82.8 to 93.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
120622	93.2 to 107.2 feet	Key Note Segment		5 ft	70			
120596	107.3 to 108.3 feet	Vertical Change	.7"	5 ft	5	REF		
120623	110.1 to 122.3 feet	Key Note Segment		5 ft	61			
120603	124.4 to 126.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
120604	130.5 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
120605	135.6 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
120606	148.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	$15,000
120597	154.0 to 155.0 feet	Vertical Change	.26"	5 ft	5	REF		
120624	178.1 to 192.2 feet	Key Note Segment		5 ft	71			
120607	193.8 to 195.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
120625	200.3 to 208.2 feet	Key Note Segment		5 ft	40			
120608	217.5 to 249.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	$19,260
120598	227.3 to 228.3 feet	Vertical Change	-.27"	5 ft	5	REF		
120609	252.3 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
120610	264.8 to 266.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
120626	266.8 to 275.3 feet	Key Note Segment		5 ft	43			
120611	279.3 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
120612	284.7 to 292.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
120613	296.9 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
120614	303.0 to 306.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
120627	306.8 to 322.9 feet	Key Note Segment		5 ft	80			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031429	AUSTIN AVE	W SOUTH ST	E LINCOLN AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120615	333.3 to 335.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
120616	340.5 to 341.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
120617	345.4 to 349.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
120618	354.5 to 355.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
120619	358.2 to 362.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
120620	362.4 to 369.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **W SOUTH ST** **$97,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031403	AUSTIN AVE	W SOUTH ST	E RIVERSIDE DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120429	11.9 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
120430	16.4 to 17.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
120442	17.8 to 38.1 feet	Key Note Segment		5 ft	102			
120431	48.7 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
120432	63.6 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,300**
120419	79.7 to 80.7 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
120420	88.7 to 89.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
120443	92.0 to 103.0 feet	Key Note Segment		5 ft	55			
120421	92.5 to 93.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
120422	103.8 to 104.8 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
120444	129.7 to 142.4 feet	Key Note Segment		5 ft	64			
120423	130.3 to 131.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
120424	147.7 to 148.7 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
120433	148.8 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
120425	161.5 to 162.5 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
120434	166.6 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
120445	175.3 to 184.3 feet	Key Note Segment		5 ft	45			
120435	185.8 to 193.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
120426	186.5 to 187.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
120436	193.8 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
120437	212.9 to 226.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
120427	217.1 to 218.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
120438	226.3 to 239.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
120428	228.9 to 229.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
120439	240.4 to 246.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
120440	248.3 to 274.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
120441	275.8 to 280.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: W *side of* **AUSTIN AVE** *Starting at:* **W SOUTH ST** **$75,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011631	AUSTIN AVE	WESSMITH WAY	JAMES WAY	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117284	0.7 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
117285	29.8 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
117286	48.3 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
117287	65.7 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
117289	75.1 to 76.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117290	87.1 to 88.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117288	102.9 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,840**

TOTAL COST FOR: E *side of* **AUSTIN AVE** *Starting at:* **WESSMITH WAY** **$60,798.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161151	AVALON AVE	KENT DR	ZAK WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86151	0.0 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
86152	9.0 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
86182	16.4 to 37.8 feet	Key Note Segment		5 ft	107			
86139	38.1 to 39.1 feet	**Vertical Change**	-.46"	5 ft	5	REF		
86153	38.3 to 39.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
86154	41.3 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86155	43.5 to 60.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
86156	60.6 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
86183	69.1 to 89.8 feet	Key Note Segment		5 ft	104			
86157	91.8 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
86140	95.8 to 96.8 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
86158	97.0 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
86184	115.3 to 147.4 feet	Key Note Segment		5 ft	161			
86159	149.3 to 150.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
86160	152.8 to 157.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**
86161	158.4 to 162.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
86162	162.4 to 175.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
86185	176.2 to 197.5 feet	Key Note Segment		5 ft	107			
86141	177.1 to 178.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
86163	198.8 to 203.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
86164	203.8 to 204.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
86165	205.3 to 206.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
86186	206.9 to 234.0 feet	Key Note Segment		5 ft	136			
86142	234.2 to 235.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
86166	239.1 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
86167	245.7 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86168	250.9 to 252.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
86169	254.3 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161151	AVALON AVE	KENT DR	ZAK WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86170	266.4 to 267.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86171	272.0 to 279.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
86143	273.9 to 274.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
86172	279.5 to 285.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
86187	285.3 to 306.8 feet	Key Note Segment		5 ft	108			
86173	308.0 to 311.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
86174	312.0 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
86175	316.4 to 325.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
86176	333.9 to 337.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
86188	338.4 to 359.8 feet	Key Note Segment		5 ft	107			
86144	349.5 to 350.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
86177	360.1 to 367.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	39	SF	$40	**$1,540**
86189	368.8 to 388.1 feet	Key Note Segment		5 ft	97			
86178	389.7 to 432.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,680**
86179	435.0 to 445.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
86190	447.3 to 469.2 feet	Key Note Segment		5 ft	110			
86145	448.1 to 449.1 feet	**Vertical Change**	.63"	5 ft	5	REF		
86146	469.2 to 470.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
86180	470.1 to 475.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
86147	470.9 to 471.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
86191	476.7 to 503.8 feet	Key Note Segment		5 ft	136			
86148	477.2 to 478.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
86149	504.4 to 505.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
86181	505.3 to 516.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
86150	516.6 to 517.6 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **AVALON AVE** *Starting at:* **KENT DR** **$127,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161040	AVALON AVE	ZAK WAY	KENT DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85381	0.9 to 22.4 feet	Key Note Segment		5 ft	108			
85326	5.4 to 6.4 feet	Vertical Change	.26"	5 ft	5	REF		
85344	23.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
85327	25.7 to 26.7 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
85328	28.1 to 29.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
85345	34.9 to 38.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
85346	40.9 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,480
85329	43.2 to 44.2 feet	Vertical Change	.39"	5 ft	5	REF		
85330	45.1 to 46.1 feet	Vertical Change	.81"	5 ft	5	REF		
85382	46.7 to 70.4 feet	Key Note Segment		5 ft	119			
85331	51.4 to 54.9 feet	Vertical Change	.5"	5 ft	18	REF		
85347	71.5 to 76.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
85348	78.5 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
85349	82.8 to 95.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
85350	96.0 to 97.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$720
85351	97.8 to 111.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	$8,100
85332	98.1 to 99.1 feet	Vertical Change	.49"	5 ft	5	REF		
85383	112.2 to 137.0 feet	Key Note Segment		5 ft	124			
85352	137.0 to 151.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	72	SF	$40	$2,860
85353	154.6 to 167.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	$7,620
85384	168.9 to 189.4 feet	Key Note Segment		5 ft	103			
85333	189.0 to 190.0 feet	Vertical Change	.26"	5 ft	5	REF		
85354	194.5 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
85334	200.0 to 201.0 feet	Vertical Change	.66"	5 ft	5	REF		
85355	204.3 to 205.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
85356	207.8 to 210.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
85385	211.3 to 242.2 feet	Key Note Segment		5 ft	155			
85335	232.2 to 233.2 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161040	AVALON AVE	ZAK WAY	KENT DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85357	243.5 to 253.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
85358	253.8 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85359	257.8 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
85360	274.3 to 276.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
85336	276.3 to 277.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
85386	277.8 to 296.0 feet	Key Note Segment		5 ft	91			
85361	297.1 to 308.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
85362	310.8 to 328.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
85337	315.0 to 316.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
85387	329.2 to 349.5 feet	Key Note Segment		5 ft	102			
85363	350.8 to 355.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
85388	356.0 to 375.7 feet	Key Note Segment		5 ft	99			
85364	377.3 to 378.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85365	386.8 to 388.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
85366	390.3 to 394.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
85367	402.9 to 406.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
85368	407.5 to 409.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
85369	411.6 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
85370	425.5 to 426.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
85389	426.9 to 454.2 feet	Key Note Segment		5 ft	137			
85338	436.0 to 437.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
85390	463.6 to 485.3 feet	Key Note Segment		5 ft	109			
85339	475.1 to 476.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
85340	485.5 to 486.5 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
85371	486.7 to 489.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
85372	493.5 to 503.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
85373	509.6 to 515.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
85374	518.1 to 533.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161040	AVALON AVE	ZAK WAY	KENT DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85341	523.8 to 524.8 feet	Vertical Change	-.3"	5 ft	5	REF		
85391	533.3 to 561.1 feet	Key Note Segment		5 ft	139			
85375	563.2 to 564.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
85376	569.2 to 573.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
85392	573.7 to 593.6 feet	Key Note Segment		5 ft	99			
85342	584.6 to 585.6 feet	Vertical Change	.3"	5 ft	5	REF		
85377	594.3 to 601.4 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	36	SF	$40	**$1,420**
85378	603.6 to 613.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
85379	614.2 to 624.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
85393	634.7 to 653.9 feet	Key Note Segment		5 ft	96			
85343	644.6 to 645.6 feet	Vertical Change	.63"	5 ft	5	REF		
85380	656.3 to 664.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
85394	663.4 to 665.4 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: N *side of* **AVALON AVE** *Starting at:* **ZAK WAY** **$135,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281004	AVE 13	WATT ST	367 PECAN AVE	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111740	2.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
111741	13.7 to 15.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
111742	19.2 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
111743	23.1 to 26.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
111744	33.0 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
111745	34.8 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111722	57.3 to 58.3 feet	**Vertical Change**	-1.07"	5 ft	5	REF		
111746	57.3 to 61.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
111723	62.7 to 63.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
111747	65.8 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
111748	70.8 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
111749	80.6 to 83.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
111750	83.7 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
111724	87.2 to 88.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
111751	88.6 to 93.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
111752	96.1 to 101.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
111725	103.5 to 104.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
111753	103.6 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
111726	108.8 to 109.8 feet	**Vertical Change**	1.11"	5 ft	5	SF	$75	**$375**
111754	113.3 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
111727	119.0 to 120.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
111755	125.3 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
111728	125.5 to 126.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
111756	129.3 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111757	133.1 to 134.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
111758	136.3 to 143.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$4,020**
111759	143.3 to 144.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
111760	144.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281004	AVE 13	WATT ST	367 PECAN AVE	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111729	150.6 to 151.6 feet	Vertical Change	-.31"	5 ft	5	REF		
111761	157.6 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
111762	159.9 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
111763	168.8 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
111764	176.6 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
111765	180.6 to 186.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
111730	182.1 to 183.1 feet	Vertical Change	.95"	5 ft	5	SF	$75	$375
111766	191.5 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
111767	195.5 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	$5,580
111731	206.0 to 207.0 feet	Vertical Change	.47"	5 ft	5	REF		
111768	206.5 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
111769	219.9 to 224.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
111770	225.4 to 235.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	$6,000
111732	232.6 to 233.6 feet	Vertical Change	.27"	5 ft	5	REF		
111771	235.8 to 245.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
111772	246.1 to 247.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
111773	250.3 to 273.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	$13,860
111774	277.4 to 282.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
111775	284.8 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	$18,900
111733	294.5 to 295.5 feet	Vertical Change	.59"	5 ft	5	REF		
111734	299.6 to 300.6 feet	Vertical Change	-.26"	5 ft	5	REF		
111776	318.9 to 320.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
111777	322.7 to 324.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
111778	324.8 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
111735	333.2 to 334.2 feet	Vertical Change	1.41"	5 ft	5	SF	$75	$375
111779	337.8 to 348.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
111736	347.6 to 348.6 feet	Vertical Change	1.66"	5 ft	5	REF		
111780	350.8 to 352.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281004	AVE 13	WATT ST	367 PECAN AVE	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111781	355.0 to 364.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
111737	365.9 to 366.9 feet	**Vertical Change**	3.05"	5 ft	5	SF	$75	**$375**
111782	369.7 to 371.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
111783	376.3 to 394.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
111738	392.4 to 395.2 feet	**Vertical Change**	.3"	5 ft	14	REF		
111784	395.1 to 396.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111785	398.8 to 400.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111790	402.3 to 425.6 feet	Key Note Segment		5 ft	117			
111786	426.4 to 427.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
111787	432.1 to 458.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
111791	459.8 to 482.9 feet	Key Note Segment		5 ft	116			
111788	484.6 to 485.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111789	488.0 to 489.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111739	488.7 to 489.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **AVE 13** *Starting at:* **WATT ST** **$174,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191018	AVE 14	28123 AVE 14	28123 AVE 14	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72834	1.3 to 2.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
72835	2.6 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
72836	8.6 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
72829	11.0 to 12.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
72837	21.7 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
72838	36.3 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
72839	41.8 to 75.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,920**
72840	80.3 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
72830	102.6 to 103.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
72831	110.0 to 111.0 feet	**Vertical Change**	-.73"	5 ft	5	REF		
72841	111.0 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
72832	114.5 to 115.5 feet	**Vertical Change**	.56"	5 ft	5	REF		
72842	115.5 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
72833	118.8 to 119.8 feet	**Vertical Change**	-.71"	5 ft	5	REF		
72843	127.8 to 152.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**

TOTAL COST FOR: N *side of* **AVE 14** *Starting at:* **28123 AVE 14** **$67,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191014	AVE 14	28198 AVE 14	28198 AVE 14	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72823	1.8 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
72819	4.8 to 5.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
72824	10.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72825	14.8 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72826	18.0 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
72820	22.3 to 23.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
72821	24.6 to 25.6 feet	**Vertical Change**	-.39"	5 ft	5	REF		
72822	29.0 to 77.6 feet	**Vertical Change**	3.51"	5 ft	243	REF		
72827	56.9 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
72828	75.5 to 76.6 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: S *side of* **AVE 14** *Starting at:* **28198 AVE 14** **$32,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111559	AVE 17	3175 AVENUE 17	3175 AVENUE 17	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133816	8.6 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133813	9.0 to 10.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
133817	27.1 to 35.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
133818	35.7 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
133819	55.6 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
133820	64.1 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
133821	79.3 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
133822	103.0 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
133823	115.4 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133814	121.0 to 122.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
133824	128.5 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
133815	133.4 to 134.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
133825	172.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
133826	186.9 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
133827	193.3 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
133828	202.0 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: S *side of* **AVE 17** *Starting at:* **3175 AVENUE 17** **$54,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111419	AVE 17	3254 AIRPORT DR	3254 AIRPORT DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133503	1.4 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
133493	7.0 to 8.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
133494	18.4 to 19.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
133504	28.9 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
133505	36.8 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
133506	43.6 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
133507	50.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
133495	55.1 to 56.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
133508	62.6 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
133496	63.5 to 64.5 feet	**Vertical Change**	-.49"	5 ft	5	REF		
133497	81.9 to 82.9 feet	**Vertical Change**	-.83"	5 ft	5	REF		
133509	86.7 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
133510	94.9 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
133511	104.7 to 121.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
133498	105.4 to 106.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133499	122.3 to 123.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
133512	125.3 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
133513	130.0 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
133500	139.1 to 140.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
133514	140.9 to 148.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
133501	147.4 to 148.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
133515	149.3 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
133502	156.0 to 157.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **AVE 17** *Starting at:* **3254 AIRPORT DR** **$76,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111421	AVE 17	4130 AIRPORT DR	AIRPORT DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133520	0.7 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
133516	8.5 to 9.5 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
133521	9.7 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
133517	23.0 to 24.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
133522	31.2 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	255	SF	$120	**$30,540**
133518	38.2 to 39.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
133519	57.4 to 58.4 feet	**Vertical Change**	.5"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **AVE 17** *Starting at:* **4130 AIRPORT DR** **$41,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111603	AVE 17	PARKING LOT ENTRANCE	SHARON BVD	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133836	0.0 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
133837	12.8 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133838	17.0 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
133839	24.3 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
133840	45.3 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
133841	52.6 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
133829	71.5 to 72.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
133842	79.4 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
133843	93.3 to 126.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
133844	135.7 to 139.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
133845	158.7 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
133830	166.9 to 167.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
133846	188.1 to 191.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
133847	204.3 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
133831	218.3 to 219.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
133832	222.5 to 223.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
133848	234.1 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
133849	239.8 to 245.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
133850	250.6 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
133834	255.0 to 258.0 feet	**Vertical Change**	.33"	5 ft	15	LF	$75	**$1,125**
133851	261.3 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
133852	274.1 to 285.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
133853	291.6 to 293.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
133854	298.6 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
133855	318.0 to 321.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133856	323.9 to 333.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
133857	343.5 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
133858	348.2 to 357.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111603	AVE 17	PARKING LOT ENTRANCE	SHARON BVD	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133859	361.6 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
133860	370.0 to 374.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
133835	375.7 to 376.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
133861	405.2 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
133862	423.1 to 441.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**

TOTAL COST FOR: S *side of* **AVE 17** *Starting at:* **PARKING LOT ENTRANCE** **$134,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111556	AVENUE 17	24682 AVENUE 17	24658 AVENUE 17	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133812	10.6 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: S *side of* **AVENUE 17** *Starting at:* **24682 AVENUE 17** **$6,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202111440	AVIATION DR	2801 AIRPORT DR	AIRPORT DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133709	0.8 to 21.3 feet	Key Note Segment		5 ft	103			
133705	7.7 to 8.7 feet	**Vertical Change**	3.48"	5 ft	5	REF		
133707	21.3 to 27.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,320**
133708	27.9 to 47.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
133706	47.6 to 48.6 feet	**Vertical Change**	.71"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **AVIATION DR** *Starting at:* **2801 AIRPORT DR** **$13,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111640	AVIATION DR	3211 AVIATION DR	3211 AVIATION DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133953	5.0 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133947	5.9 to 6.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
133948	17.2 to 18.2 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
133954	40.9 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
133955	51.1 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
133956	60.8 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
133957	74.0 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
133949	79.9 to 80.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
133958	83.9 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
133959	91.9 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
133960	99.2 to 100.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
133961	104.6 to 110.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
133962	113.7 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
133963	130.5 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
133964	146.2 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
133965	153.8 to 156.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
133966	156.3 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133967	160.8 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
133968	179.3 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
133969	194.9 to 200.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
133970	204.2 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
133950	217.8 to 218.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
133971	235.1 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
133972	247.9 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
133951	250.0 to 251.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
133952	269.4 to 270.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
133973	270.5 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
133974	300.8 to 302.4 feet		5.0-6.0%	5 ft	8			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111640	AVIATION DR	3211 AVIATION DR	3211 AVIATION DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: N	*side of* **AVIATION DR**	*Starting at:* **3211 AVIATION DR**						**$67,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101516	AVILA WAY	431 FIG AVE	MANZANA CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132120	0.0 to 3.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
132121	3.8 to 11.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,500**
132118	10.8 to 11.8 feet	**Vertical Change**	3.18"	5 ft	5	REF		
132122	13.1 to 29.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
132123	33.5 to 35.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
132124	36.0 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
132125	42.4 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
132126	56.2 to 58.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
132127	58.5 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,300**
132128	96.2 to 97.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
132129	98.3 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
132130	102.9 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
132131	108.3 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
132132	112.2 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	446	SF	$120	**$53,460**
132136	118.1 to 119.1 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
132133	201.7 to 210.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
132134	210.9 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
132135	216.4 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
132119	220.3 to 221.3 feet	**Vertical Change**	1.08"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **AVILA WAY** *Starting at:* **431 FIG AVE** **$118,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101514	AVILA WAY	FIG AVE	431 FIG AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132115	0.8 to 5.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
132116	7.3 to 8.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: SE *side of* **AVILA WAY** *Starting at:* **FIG AVE** **$3,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101519	AVILA WAY	MANZANA CT	FIG AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132146	1.0 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	116	SF	$120	**$13,896**
132137	6.3 to 7.3 feet	**Vertical Change**	1.35"	6 ft	6	REF		
132156	20.3 to 40.1 feet	Key Note Segment		6 ft	119			
132147	43.4 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	144	SF	$120	**$17,280**
132157	69.3 to 89.5 feet	Key Note Segment		6 ft	121			
132138	69.9 to 70.9 feet	**Vertical Change**	.26"	6 ft	6	REF		
132148	90.3 to 91.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	8	SF	$40	**$336**
132149	103.3 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,456**
132158	117.7 to 137.2 feet	Key Note Segment		6 ft	117			
132150	138.7 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
132159	143.6 to 162.8 feet	Key Note Segment		6 ft	115			
132139	153.7 to 154.7 feet	**Vertical Change**	.34"	6 ft	6	REF		
132151	163.1 to 164.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	7	SF	$40	**$264**
132152	164.2 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	91	SF	$120	**$10,872**
132140	171.8 to 172.8 feet	**Vertical Change**	.4"	6 ft	6	REF		
132141	180.1 to 181.1 feet	**Vertical Change**	.36"	6 ft	6	LF	$75	**$450**
132153	181.6 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
132160	191.8 to 210.5 feet	Key Note Segment		6 ft	112			
132142	192.1 to 193.1 feet	**Vertical Change**	-.47"	6 ft	6	REF		
132143	194.1 to 195.1 feet	**Vertical Change**	.33"	6 ft	6	REF		
132154	211.4 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
132155	221.8 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	117	SF	$120	**$14,040**
132144	225.4 to 226.4 feet	**Vertical Change**	.29"	6 ft	6	REF		
132145	233.0 to 234.0 feet	**Vertical Change**	.28"	6 ft	6	REF		

TOTAL COST FOR: NW *side of* **AVILA WAY** *Starting at:* **MANZANA CT** **$67,938.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211129	AWAHNEE CT	MONTEREY ST	MONTEREY ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79234	0.8 to 13.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
79235	13.0 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
79248	21.3 to 40.2 feet	Key Note Segment		5 ft	95			
79236	41.5 to 54.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
79249	54.3 to 74.7 feet	Key Note Segment		5 ft	102			
79237	75.7 to 82.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
79238	82.9 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
79239	117.8 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
79250	126.8 to 147.5 feet	Key Note Segment		5 ft	104			
79231	137.3 to 138.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
79240	152.7 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
79251	175.6 to 196.3 feet	Key Note Segment		5 ft	104			
79241	214.2 to 222.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
79232	215.7 to 216.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
79242	228.4 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
79252	255.3 to 274.3 feet	Key Note Segment		5 ft	95			
79243	275.8 to 284.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
79244	285.9 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
79253	293.3 to 313.4 feet	Key Note Segment		5 ft	100			
79233	303.3 to 304.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
79245	316.4 to 325.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
79246	325.9 to 330.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
79247	333.0 to 334.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N/W/S *side of* **AWAHNEE CT** *Starting at:* **MONTEREY ST** **$82,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111311	AZURE DR	1912 AZURE DR	1912 AZURE DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133384	0.0 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
133383	2.7 to 6.5 feet	**Vertical Change**	.26"	5 ft	19	REF		
133385	8.3 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **AZURE DR** *Starting at:* **1912 AZURE DR** **$4,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111314	AZURE DR	1913 AZURE DR	1913 AZURE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133386	0.0 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
133387	8.8 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,220**

TOTAL COST FOR: E *side of* **AZURE DR** *Starting at:* **1913 AZURE DR** **$19,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111315	AZURE DR	1913 AZURE DR	IVORY CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133389	1.6 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
133390	2.8 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
133391	6.7 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
133392	12.2 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
133393	14.8 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
133394	23.7 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
133395	37.3 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
133396	46.5 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
133397	76.5 to 94.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
133398	94.5 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,760**
133399	132.8 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
133388	154.8 to 155.8 feet	**Vertical Change**	1.1"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **AZURE DR** *Starting at:* **1913 AZURE DR** **$76,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111141	AZURE DR	2240 AZURE DR	SCARLET DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132890	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
132895	3.4 to 22.8 feet	Key Note Segment		5 ft	97			
132887	5.3 to 6.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
132888	11.2 to 12.2 feet	**Vertical Change**	-.51"	5 ft	5	REF		
132891	26.1 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
132892	32.8 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
132893	49.8 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132896	53.3 to 71.9 feet	Key Note Segment		5 ft	93			
132889	63.7 to 64.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
132894	71.9 to 73.2 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	6	SF	$40	**$260**

TOTAL COST FOR: W *side of* **AZURE DR** *Starting at:* **2240 AZURE DR** **$12,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111139	AZURE DR	2250 AZURE DR	2250 AZURE DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132885	0.4 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132886	13.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

TOTAL COST FOR: W *side of* **AZURE DR** *Starting at:* **2250 AZURE DR** **$10,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111138	AZURE DR	2290 AZURE DR	2260 AZURE DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132876	5.6 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
132880	24.8 to 43.4 feet	Key Note Segment		5 ft	93			
132881	51.0 to 69.5 feet	Key Note Segment		5 ft	93			
132877	71.3 to 72.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
132878	73.3 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
132879	103.4 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
132882	110.8 to 129.8 feet	Key Note Segment		5 ft	95			
132884	129.8 to 131.3 feet		5.0-6.0%	5 ft	8			
132883	136.8 to 155.8 feet	Key Note Segment		5 ft	95			

TOTAL COST FOR: W *side of* **AZURE DR** *Starting at:* **2290 AZURE DR** **$29,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111136	AZURE DR	2380 AZURE DR	2290 AZURE DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132843	0.0 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
132844	7.3 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
132836	10.3 to 11.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
132861	22.7 to 41.5 feet	Key Note Segment		5 ft	94			
132837	32.9 to 33.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
132838	43.4 to 44.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
132862	49.5 to 67.2 feet	Key Note Segment		5 ft	89			
132873	55.3 to 56.3 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
132839	56.3 to 57.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
132871	67.2 to 68.7 feet		6.0-7.0%	5 ft	8			
132845	70.0 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
132846	81.3 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
132847	89.8 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
132863	109.1 to 127.8 feet	Key Note Segment		5 ft	94			
132848	131.7 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
132874	134.2 to 135.2 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
132840	135.5 to 136.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
132864	135.7 to 153.8 feet	Key Note Segment		5 ft	91			
132875	168.8 to 169.8 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
132849	180.0 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132850	191.2 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
132865	195.2 to 214.8 feet	Key Note Segment		5 ft	98			
132851	218.8 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
132852	223.2 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
132866	238.2 to 257.4 feet	Key Note Segment		5 ft	96			
132841	254.0 to 255.0 feet	**Vertical Change**	2.83"	5 ft	5	REF		
132872	257.4 to 258.8 feet		5.0-6.0%	5 ft	7			
132853	260.1 to 264.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111136	AZURE DR	2380 AZURE DR	2290 AZURE DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132867	264.7 to 284.1 feet	Key Note Segment		5 ft	97			
132854	286.0 to 294.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
132855	298.3 to 305.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
132868	307.0 to 326.4 feet	Key Note Segment		5 ft	97			
132842	324.5 to 325.5 feet	**Vertical Change**	1.06"	5 ft	5	REF		
132856	330.2 to 339.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
132857	342.6 to 344.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
132858	356.1 to 357.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
132859	360.7 to 365.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
132869	366.9 to 386.3 feet	Key Note Segment		5 ft	97			
132870	393.0 to 412.5 feet	Key Note Segment		5 ft	98			
132860	412.9 to 413.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **AZURE DR** *Starting at:* **2380 AZURE DR** **$67,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111327	AZURE DR	IVORY CT	UMBER DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133485	0.3 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
133486	5.4 to 21.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
133483	11.2 to 12.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
133487	23.3 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
133488	40.3 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
133489	58.2 to 113.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	278	SF	$120	**$33,300**
133490	117.3 to 118.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
133491	119.8 to 138.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
133492	142.0 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
133484	146.3 to 147.3 feet	**Vertical Change**	-.41"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **AZURE DR** *Starting at:* **IVORY CT** **$78,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111310	AZURE DR	SCARLET DR	1912 AZURE DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133377	0.4 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
133374	20.6 to 21.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
133378	21.5 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
133379	41.1 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
133375	46.7 to 47.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
133380	104.3 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
133381	111.7 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
133382	117.6 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,720**
133376	143.4 to 144.4 feet	**Vertical Change**	.45"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **AZURE DR** *Starting at:* **SCARLET DR** **$49,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109160900	BALSAM CT	N GRANADA DR	N GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69227	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
69228	8.4 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
69217	9.9 to 10.9 feet	**Vertical Change**	3.42"	5 ft	5	REF		
69218	22.8 to 23.8 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
69276	24.2 to 25.4 feet		5.0-6.0%	5 ft	6			
69265	26.7 to 40.0 feet	Key Note Segment		5 ft	67			
69229	42.3 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
69230	45.8 to 50.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
69231	52.5 to 53.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
69232	55.0 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
69233	60.6 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
69266	80.6 to 95.1 feet	Key Note Segment		5 ft	73			
69234	96.5 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69235	97.8 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69236	116.3 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
69237	127.3 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
69267	134.4 to 148.6 feet	Key Note Segment		5 ft	71			
69238	150.5 to 155.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
69239	155.7 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
69240	161.6 to 170.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
69268	170.2 to 184.5 feet	Key Note Segment		5 ft	72			
69241	184.8 to 190.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
69242	190.4 to 204.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
69243	207.6 to 213.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
69269	214.7 to 230.3 feet	Key Note Segment		5 ft	78			
69219	239.5 to 240.5 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
69270	258.3 to 271.5 feet	Key Note Segment		5 ft	66			
69220	271.8 to 272.8 feet	**Vertical Change**	.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109160900	BALSAM CT	N GRANADA DR	N GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69244	272.3 to 282.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	53	SF	$40	$2,100
69245	285.6 to 289.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
69246	289.8 to 298.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,460
69271	311.2 to 326.3 feet	Key Note Segment		5 ft	76			
69247	332.6 to 334.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
69248	335.7 to 340.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
69249	341.1 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
69272	347.7 to 369.8 feet	Key Note Segment		5 ft	111			
69221	350.1 to 351.1 feet	Vertical Change	3.05"	5 ft	5	REF		
69222	351.8 to 352.8 feet	Vertical Change	.31"	5 ft	5	REF		
69250	373.3 to 386.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
69224	381.5 to 382.5 feet	Vertical Change	-.31"	5 ft	5	REF		
69251	388.9 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
69252	397.3 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
69253	400.9 to 411.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	$6,180
69254	411.2 to 412.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
69273	413.5 to 427.4 feet	Key Note Segment		5 ft	70			
69255	427.6 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
69225	434.8 to 435.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
69256	436.3 to 437.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
69274	438.8 to 453.2 feet	Key Note Segment		5 ft	72			
69226	440.7 to 441.7 feet	Vertical Change	-.35"	5 ft	5	REF		
69257	454.4 to 460.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,540
69258	461.8 to 479.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,440
69259	496.6 to 503.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
69275	503.7 to 517.3 feet	Key Note Segment		5 ft	68			
69260	518.3 to 529.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	$6,600
69261	529.3 to 534.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109160900	BALSAM CT	N GRANADA DR	N GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69262	546.3 to 547.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69263	550.7 to 553.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
69264	553.5 to 555.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N / S *side of* **BALSAM CT** *Starting at:* **N GRANADA DR** **$137,445.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111126	BARBERA AVE	GAMAY AVE	MERLOT AVE	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91217	2.7 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
91218	9.5 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
91219	15.1 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
91245	22.9 to 37.6 feet	Key Note Segment		5 ft	74			
91207	30.7 to 31.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
91220	38.3 to 39.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
91208	43.4 to 44.4 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
91221	45.2 to 49.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
91246	49.1 to 64.5 feet	Key Note Segment		5 ft	77			
91209	49.9 to 50.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
91222	66.7 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
91223	70.6 to 77.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
91224	77.2 to 80.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
91225	84.4 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
91210	86.6 to 87.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
91226	89.1 to 100.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
91247	101.0 to 115.4 feet	Key Note Segment		5 ft	72			
91227	125.0 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
91228	136.6 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
91229	140.2 to 144.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
91211	143.8 to 147.3 feet	**Vertical Change**	.36"	5 ft	18	REF		
91230	148.8 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
91231	159.3 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
91232	163.8 to 171.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,740**
91248	175.5 to 188.6 feet	Key Note Segment		5 ft	66			
91212	182.6 to 183.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
91233	191.0 to 204.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
91249	204.6 to 218.8 feet	Key Note Segment		5 ft	71			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111126	BARBERA AVE	GAMAY AVE	MERLOT AVE	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91213	212.5 to 213.5 feet	Vertical Change	.32"	5 ft	5	REF		
91234	220.2 to 224.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
91235	227.8 to 232.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
91236	234.8 to 236.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
91214	237.1 to 238.1 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
91237	240.4 to 241.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
91238	241.9 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91215	250.7 to 251.7 feet	Vertical Change	.36"	5 ft	5	REF		
91239	251.3 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
91240	269.6 to 273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
91241	275.9 to 281.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
91250	310.7 to 325.1 feet	Key Note Segment		5 ft	72			
91242	327.1 to 334.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
91243	337.8 to 343.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
91244	343.8 to 346.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
91251	345.2 to 346.2 feet		5.0-6.0%	5 ft	5			
91216	347.2 to 348.2 feet	Vertical Change	.47"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **BARBERA AVE** *Starting at:* **GAMAY AVE** **$81,525.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111123	BARBERA AVE	MERLOT AVE	GAMAY AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91170	1.0 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91171	6.2 to 12.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
91172	15.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
91200	23.4 to 37.3 feet	Key Note Segment		5 ft	69			
91173	43.0 to 44.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
91174	46.7 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91201	49.2 to 63.2 feet	Key Note Segment		5 ft	70			
91175	63.4 to 64.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
91176	65.0 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
91177	68.9 to 72.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
91178	81.2 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
91179	90.1 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91161	95.7 to 96.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
91180	98.4 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91202	101.2 to 114.1 feet	Key Note Segment		5 ft	65			
91181	114.4 to 118.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$780**
91162	126.5 to 127.5 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
91163	137.4 to 138.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
91182	143.2 to 144.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
91183	151.2 to 167.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
91184	168.1 to 171.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
91185	173.1 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91203	178.3 to 194.3 feet	Key Note Segment		5 ft	80			
91164	179.1 to 180.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
91186	204.6 to 208.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
91187	208.4 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
91204	212.7 to 226.2 feet	Key Note Segment		5 ft	68			
91165	213.4 to 214.4 feet	**Vertical Change**	.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111123	BARBERA AVE	MERLOT AVE	GAMAY AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91188	226.3 to 227.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
91189	234.7 to 235.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
91166	235.0 to 236.0 feet	Vertical Change	.26"	5 ft	5	REF		
91190	254.3 to 267.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160
91191	271.8 to 272.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
91192	273.1 to 275.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
91193	277.9 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
91205	281.2 to 296.2 feet	Key Note Segment		5 ft	75			
91194	296.2 to 299.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	18	SF	$40	$740
91195	302.6 to 303.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
91196	305.8 to 307.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
91206	307.5 to 321.2 feet	Key Note Segment		5 ft	69			
91167	308.8 to 309.8 feet	Vertical Change	.26"	5 ft	5	REF		
91168	315.7 to 316.7 feet	Vertical Change	.29"	5 ft	5	REF		
91197	322.9 to 335.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
91169	333.2 to 334.2 feet	Vertical Change	-.41"	5 ft	5	REF		
91198	336.1 to 340.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
91199	341.8 to 347.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660

TOTAL COST FOR: E *side of* **BARBERA AVE** *Starting at:* **MERLOT AVE** **$71,105.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091205	BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129018	0.7 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
128969	3.0 to 4.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
129019	16.6 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
129020	23.3 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
129070	27.4 to 40.3 feet	Key Note Segment		5 ft	64			
129021	40.3 to 41.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
129022	47.6 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
128970	51.1 to 52.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129071	51.9 to 66.6 feet	Key Note Segment		5 ft	73			
129023	74.5 to 78.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
128971	79.1 to 80.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
129024	79.6 to 86.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
128972	88.7 to 89.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
129025	88.9 to 95.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
129026	95.0 to 99.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
128973	98.5 to 99.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129027	101.9 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
128974	102.8 to 103.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129028	108.2 to 112.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
128975	110.3 to 111.3 feet	**Vertical Change**	.48"	5 ft	5	REF		
129029	114.8 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
129030	123.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
128976	128.6 to 129.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
129072	129.8 to 144.3 feet	Key Note Segment		5 ft	73			
129073	155.6 to 169.8 feet	Key Note Segment		5 ft	71			
128977	156.5 to 157.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
128978	160.8 to 161.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
128979	173.5 to 174.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091205	BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129031	174.9 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
129032	203.5 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
129033	210.7 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
128981	212.8 to 213.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
128982	216.9 to 220.4 feet	**Vertical Change**	-.27"	5 ft	18	REF		
128983	229.9 to 230.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
129074	233.9 to 247.4 feet	Key Note Segment		5 ft	68			
128984	234.4 to 235.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
128985	238.6 to 239.6 feet	**Vertical Change**	-.4"	5 ft	5	REF		
128986	244.8 to 249.9 feet	**Vertical Change**	-.3"	5 ft	26	REF		
129034	248.3 to 249.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
128987	253.5 to 254.5 feet	**Vertical Change**	-.38"	5 ft	5	REF		
129035	253.9 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
128988	255.6 to 256.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
129075	258.7 to 273.3 feet	Key Note Segment		5 ft	73			
128989	260.2 to 261.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
128990	262.3 to 265.3 feet	**Vertical Change**	-.29"	5 ft	15	REF		
128991	272.9 to 273.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
129036	273.3 to 275.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
128992	276.9 to 277.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
129037	285.2 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
128993	294.5 to 295.5 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
129038	295.8 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
129039	318.7 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
129076	336.9 to 350.5 feet	Key Note Segment		5 ft	68			
129040	358.7 to 360.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
129077	362.6 to 376.7 feet	Key Note Segment		5 ft	71			
129041	383.3 to 386.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091205	BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129042	394.8 to 400.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
129043	405.0 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
128994	413.0 to 414.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
129044	414.6 to 439.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	$14,820
128995	423.9 to 424.9 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
128996	432.6 to 433.6 feet	Vertical Change	.29"	5 ft	5	REF		
129078	439.8 to 453.4 feet	Key Note Segment		5 ft	68			
128997	451.6 to 452.6 feet	Vertical Change	.28"	5 ft	5	REF		
129045	458.8 to 463.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
129079	465.6 to 479.4 feet	Key Note Segment		5 ft	69			
129046	479.4 to 493.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	70	SF	$40	$2,780
129047	496.8 to 497.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
128998	500.8 to 501.8 feet	Vertical Change	-.26"	5 ft	5	REF		
129048	501.2 to 508.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
128999	510.0 to 511.0 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
129049	511.4 to 525.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,340
129050	527.8 to 529.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
129051	530.9 to 535.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
129000	542.0 to 543.0 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
129080	544.0 to 558.8 feet	Key Note Segment		5 ft	74			
129052	558.9 to 564.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,160
129001	568.8 to 569.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
129081	569.0 to 582.8 feet	Key Note Segment		5 ft	69			
129053	586.2 to 605.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	$11,280
129054	605.6 to 611.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
129055	612.9 to 620.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,560
129002	615.4 to 616.4 feet	Vertical Change	.77"	5 ft	5	REF		
129003	618.1 to 619.1 feet	Vertical Change	2.16"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091205	BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129056	622.8 to 628.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
129057	631.0 to 646.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
129004	645.7 to 646.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
129082	646.9 to 660.8 feet	Key Note Segment		5 ft	70			
129005	660.0 to 661.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
129058	660.8 to 669.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	44	SF	$40	**$1,740**
129006	664.3 to 665.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
129007	666.7 to 667.7 feet	**Vertical Change**	2.06"	5 ft	5	REF		
129008	671.8 to 672.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
129083	672.9 to 686.8 feet	Key Note Segment		5 ft	70			
129009	676.1 to 677.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
129059	687.5 to 690.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
129060	690.1 to 693.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
129061	693.9 to 710.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
129010	694.7 to 695.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
129062	715.3 to 727.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
129011	718.4 to 719.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
129012	724.9 to 725.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129063	730.1 to 745.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,120**
129013	742.2 to 743.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
129014	744.3 to 745.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
129064	745.6 to 746.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129015	749.3 to 750.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
129084	749.5 to 764.1 feet	Key Note Segment		5 ft	73			
129065	765.2 to 766.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
129066	769.5 to 773.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
129085	776.3 to 792.3 feet	Key Note Segment		5 ft	80			
129067	793.2 to 803.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091205	BARCELONA WAY	LAGUNA WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129068	803.5 to 809.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
129016	806.4 to 809.6 feet	**Vertical Change**	-.29"	5 ft	16	REF		
129069	810.3 to 819.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
129017	810.8 to 811.8 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **BARCELONA WAY** *Starting at:* **LAGUNA WAY** **$213,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091343	BARCELONA WAY	SEGOVIA CT	WESSMITH WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130430	1.6 to 2.6 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
130431	5.7 to 6.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
130494	26.8 to 40.8 feet	Key Note Segment		5 ft	70			
130463	44.0 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
130432	45.6 to 46.6 feet	Vertical Change	.3"	5 ft	5	REF		
130495	56.6 to 74.3 feet	Key Note Segment		5 ft	89			
130433	75.6 to 76.6 feet	Vertical Change	.29"	5 ft	5	REF		
130464	76.3 to 77.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
130465	77.5 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
130502	79.0 to 80.0 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
130434	83.7 to 84.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
130435	87.7 to 88.7 feet	Vertical Change	3.55"	5 ft	5	SF	$75	$375
130436	90.3 to 91.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
130466	93.7 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
130467	101.7 to 104.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
130438	104.0 to 105.0 feet	Vertical Change	-.28"	5 ft	5	REF		
130468	105.8 to 106.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
130469	106.9 to 110.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$2,040
130470	110.3 to 112.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
130439	112.2 to 113.2 feet	Vertical Change	.49"	5 ft	5	REF		
130496	112.6 to 128.4 feet	Key Note Segment		5 ft	79			
130471	128.8 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
130440	130.9 to 131.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
130503	135.3 to 136.3 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
130441	138.0 to 139.0 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
130497	139.9 to 154.1 feet	Key Note Segment		5 ft	71			
130442	150.7 to 151.7 feet	Vertical Change	-.26"	5 ft	5	REF		
130472	154.1 to 155.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	6	SF	$40	$240

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091343	BARCELONA WAY	SEGOVIA CT	WESSMITH WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130473	159.9 to 164.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,760**
130504	162.3 to 163.3 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
130474	164.5 to 166.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
130443	165.9 to 166.9 feet	Vertical Change	.31"	5 ft	5	REF		
130475	167.6 to 169.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
130476	169.7 to 176.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
130444	170.2 to 171.2 feet	Vertical Change	-.27"	5 ft	5	REF		
130477	176.1 to 177.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
130445	176.6 to 177.6 feet	Vertical Change	.3"	5 ft	5	REF		
130478	180.5 to 189.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
130446	183.2 to 184.2 feet	Vertical Change	.32"	5 ft	5	REF		
130479	193.1 to 201.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
130447	200.5 to 201.5 feet	Vertical Change	.39"	5 ft	5	REF		
130480	204.1 to 208.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
130498	208.3 to 223.6 feet	Key Note Segment		5 ft	77			
130448	217.8 to 218.8 feet	Vertical Change	.28"	5 ft	5	REF		
130481	225.1 to 228.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
130449	228.7 to 229.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
130482	232.2 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
130450	233.0 to 234.0 feet	Vertical Change	.42"	5 ft	5	REF		
130499	234.3 to 249.5 feet	Key Note Segment		5 ft	76			
130483	251.3 to 253.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
130484	256.8 to 266.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
130451	265.3 to 266.3 feet	Vertical Change	-.28"	5 ft	5	REF		
130452	267.9 to 268.9 feet	Vertical Change	.3"	5 ft	5	REF		
130485	268.6 to 285.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
130453	269.6 to 270.6 feet	Vertical Change	-.27"	5 ft	5	REF		
130454	276.1 to 279.3 feet	Vertical Change	.29"	5 ft	16	LF	$75	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091343	BARCELONA WAY	SEGOVIA CT	WESSMITH WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130455	284.8 to 285.8 feet	Vertical Change	.27"	5 ft	5	REF		
130486	288.3 to 291.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
130456	289.1 to 290.1 feet	Vertical Change	-.28"	5 ft	5	REF		
130487	292.5 to 294.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
130457	295.6 to 296.6 feet	Vertical Change	.26"	5 ft	5	REF		
130488	295.9 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
130500	303.2 to 317.2 feet	Key Note Segment		5 ft	70			
130489	317.2 to 319.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$360**
130490	319.9 to 321.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
130458	320.5 to 321.5 feet	Vertical Change	.36"	5 ft	5	REF		
130491	323.4 to 327.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
130501	328.3 to 342.1 feet	Key Note Segment		5 ft	69			
130492	342.1 to 351.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
130460	348.2 to 349.2 feet	Vertical Change	-.34"	5 ft	5	REF		
130461	352.5 to 353.5 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
130493	353.6 to 363.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
130462	365.5 to 366.5 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **BARCELONA WAY** *Starting at:* **SEGOVIA CT** **$82,627.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091127	BARCELONA WAY	WESSMITH WAY	LAGUNA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128596	1.1 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,380**
128597	12.6 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
128625	20.2 to 34.3 feet	Key Note Segment		5 ft	70			
128626	44.0 to 61.3 feet	Key Note Segment		5 ft	87			
128572	49.3 to 50.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
128573	58.1 to 59.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
128574	81.3 to 82.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
128575	85.5 to 86.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
128598	107.6 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
128599	109.7 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
128600	111.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
128576	112.5 to 113.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
128627	116.9 to 131.6 feet	Key Note Segment		5 ft	74			
128577	121.3 to 122.3 feet	**Vertical Change**	2.15"	5 ft	5	REF		
128601	132.2 to 136.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
128602	139.8 to 141.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
128603	141.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
128628	143.5 to 157.3 feet	Key Note Segment		5 ft	69			
128578	151.0 to 152.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
128604	168.9 to 171.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
128605	178.8 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
128606	197.8 to 201.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
128607	202.7 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
128579	203.2 to 204.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
128608	208.7 to 214.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
128629	215.3 to 231.0 feet	Key Note Segment		5 ft	79			
128580	221.6 to 222.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
128609	231.0 to 238.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091127	BARCELONA WAY	WESSMITH WAY	LAGUNA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128630	242.8 to 257.6 feet	Key Note Segment		5 ft	74			
128582	248.2 to 249.2 feet	Vertical Change	.27"	5 ft	5	REF		
128610	257.6 to 269.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	61	SF	$40	$2,440
128611	271.9 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
128583	274.4 to 275.4 feet	Vertical Change	.31"	5 ft	5	REF		
128612	288.3 to 289.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
128584	293.9 to 294.9 feet	Vertical Change	.46"	5 ft	5	REF		
128613	294.1 to 298.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820
128585	298.4 to 303.6 feet	Vertical Change	.47"	5 ft	26	REF		
128614	301.4 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
128586	306.5 to 307.5 feet	Vertical Change	-.32"	5 ft	5	REF		
128631	316.3 to 331.1 feet	Key Note Segment		5 ft	74			
128589	327.9 to 328.9 feet	Vertical Change	.26"	5 ft	5	REF		
128590	331.9 to 332.9 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
128615	334.9 to 339.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
128632	342.5 to 357.3 feet	Key Note Segment		5 ft	74			
128591	347.8 to 348.8 feet	Vertical Change	-.26"	5 ft	5	REF		
128616	359.0 to 370.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	$7,080
128617	371.4 to 372.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
128618	374.9 to 381.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
128619	385.8 to 388.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,620
128620	392.3 to 407.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	$8,880
128621	409.8 to 411.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
128592	416.5 to 417.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
128633	418.8 to 436.9 feet	Key Note Segment		5 ft	91			
128622	438.7 to 444.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
128634	445.9 to 460.2 feet	Key Note Segment		5 ft	72			
128623	463.2 to 472.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091127	BARCELONA WAY	WESSMITH WAY	LAGUNA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128595	463.4 to 464.4 feet	Vertical Change	.55"	5 ft	5	REF		
128624	479.4 to 483.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: W *side of* **BARCELONA WAY** *Starting at:* **WESSMITH WAY** **$83,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281146	BARNETT WAY	865 MACADAMIA AVE	MACADAMIA AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112441	0.0 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
112442	11.1 to 29.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
112438	14.7 to 15.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
112439	25.8 to 26.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112443	32.3 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
112444	42.7 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
112440	45.3 to 46.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
112445	54.0 to 60.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
112447	61.3 to 63.3 feet		6.0-7.0%	5 ft	10			
112446	61.9 to 63.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: W *side of* **BARNETT WAY** *Starting at:* **865 MACADAMIA AVE** **$34,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201247	BARNETT WAY	ALMOND AVE	950 BARNETT WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76720	0.6 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
76696	2.2 to 3.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
76721	18.4 to 48.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
76697	32.4 to 33.4 feet	**Vertical Change**	.47"	5 ft	5	REF		
76722	51.9 to 62.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
76723	63.7 to 72.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	43	SF	$120	**$5,160**
76698	68.0 to 69.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
76724	73.0 to 75.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
76725	75.8 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
76726	79.1 to 86.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
76727	89.2 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
76747	98.3 to 124.9 feet	Key Note Segment		5 ft	133			
76728	124.9 to 138.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	70	SF	$40	**$2,780**
76699	138.5 to 139.5 feet	**Vertical Change**	-.67"	5 ft	5	REF		
76729	139.4 to 145.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	31	SF	$120	**$3,660**
76730	147.6 to 148.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$660**
76731	150.6 to 159.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
76732	162.5 to 163.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
76733	168.5 to 169.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
76757	172.0 to 173.3 feet		6.0-7.0%	5 ft	7			
76700	172.5 to 173.5 feet	**Vertical Change**	-.78"	5 ft	5	SF	$75	**$375**
76748	174.3 to 192.8 feet	Key Note Segment		5 ft	93			
76701	174.6 to 175.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
76702	178.1 to 179.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
76703	185.4 to 186.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
76734	192.8 to 197.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$1,000**
76749	197.8 to 215.0 feet	Key Note Segment		5 ft	86			
76735	219.3 to 222.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201247	BARNETT WAY	ALMOND AVE	950 BARNETT WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76750	222.6 to 241.2 feet	Key Note Segment		5 ft	93			
76704	239.7 to 240.7 feet	Vertical Change	.28"	5 ft	5	REF		
76751	246.2 to 265.2 feet	Key Note Segment		5 ft	95			
76705	253.0 to 254.0 feet	Vertical Change	.33"	5 ft	5	REF		
76706	258.3 to 259.3 feet	Vertical Change	.27"	5 ft	5	REF		
76707	263.7 to 264.7 feet	Vertical Change	.28"	5 ft	5	REF		
76736	269.4 to 302.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$19,980**
76737	305.6 to 306.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
76738	307.1 to 313.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
76752	314.4 to 331.4 feet	Key Note Segment		5 ft	85			
76708	321.0 to 322.0 feet	Vertical Change	.28"	5 ft	5	REF		
76709	332.8 to 333.8 feet	Vertical Change	.31"	5 ft	5	REF		
76739	332.8 to 337.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
76753	338.3 to 354.8 feet	Key Note Segment		5 ft	83			
76710	338.9 to 339.9 feet	Vertical Change	.29"	5 ft	5	REF		
76711	344.5 to 345.5 feet	Vertical Change	.31"	5 ft	5	REF		
76740	355.0 to 361.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
76712	355.6 to 356.6 feet	Vertical Change	.29"	5 ft	5	REF		
76754	362.8 to 380.4 feet	Key Note Segment		5 ft	88			
76713	373.5 to 374.5 feet	Vertical Change	.26"	5 ft	5	REF		
76714	375.4 to 376.4 feet	Vertical Change	-.34"	5 ft	5	REF		
76741	380.5 to 383.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	14	SF	$40	**$540**
76742	383.8 to 386.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
76755	387.5 to 405.6 feet	Key Note Segment		5 ft	91			
76715	406.8 to 407.8 feet	Vertical Change	.27"	5 ft	5	REF		
76743	407.8 to 411.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
76744	412.2 to 436.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
76756	436.8 to 465.2 feet	Key Note Segment		5 ft	142			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201247	BARNETT WAY	ALMOND AVE	950 BARNETT WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76716	438.3 to 439.3 feet	Vertical Change	.38"	5 ft	5	REF		
76745	467.7 to 488.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,660**
76717	486.3 to 487.3 feet	Vertical Change	.49"	5 ft	5	REF		
76746	490.8 to 526.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,240**
76718	497.1 to 498.1 feet	Vertical Change	.68"	5 ft	5	REF		
76758	530.8 to 531.8 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **BARNETT WAY** *Starting at:* **ALMOND AVE** **$153,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281121	BARNETT WAY	MACADAMIA AVE	PECAN AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112421	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
112422	3.2 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
112423	14.2 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
112424	22.8 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	231	SF	$120	**$27,720**
112425	71.9 to 73.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
112426	76.8 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
112427	110.5 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
112428	115.8 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
112429	131.3 to 155.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,580**
112430	156.2 to 168.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
112420	161.3 to 162.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
112431	172.6 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
112432	187.3 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
112433	223.4 to 243.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
112434	244.0 to 259.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
112435	259.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	215	SF	$120	**$25,800**
112436	306.0 to 335.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,580**
112437	335.3 to 380.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,880**

TOTAL COST FOR: W *side of* **BARNETT WAY** *Starting at:* **MACADAMIA AVE** **$197,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110200928	BARNETT WAY	STREET END	ALMOND AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75015	1.9 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
75016	18.1 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
75058	28.8 to 44.8 feet	Key Note Segment		5 ft	80			
75002	29.6 to 30.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
75017	45.2 to 51.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	34	SF	$40	**$1,340**
75059	53.2 to 68.5 feet	Key Note Segment		5 ft	77			
75003	53.8 to 54.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
75018	68.8 to 70.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
75019	72.8 to 78.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
75060	78.9 to 94.3 feet	Key Note Segment		5 ft	77			
75020	94.3 to 97.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
75021	100.1 to 102.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
75061	102.6 to 117.3 feet	Key Note Segment		5 ft	74			
75022	119.4 to 122.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
75023	123.1 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
75004	133.5 to 134.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
75024	137.0 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
75025	143.8 to 147.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
75062	148.0 to 179.0 feet	Key Note Segment		5 ft	155			
75026	179.0 to 183.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$940**
75005	179.7 to 180.7 feet	**Vertical Change**	.72"	5 ft	5	REF		
75027	183.9 to 194.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
75028	198.1 to 201.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
75063	202.3 to 217.3 feet	Key Note Segment		5 ft	75			
75029	221.9 to 226.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
75064	226.0 to 242.8 feet	Key Note Segment		5 ft	84			
75030	243.1 to 249.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,340**
75006	243.5 to 244.5 feet	**Vertical Change**	.53"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110200928	BARNETT WAY	STREET END	ALMOND AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75065	250.2 to 265.3 feet	Key Note Segment		5 ft	76			
75066	274.5 to 290.8 feet	Key Note Segment		5 ft	82			
75031	290.8 to 293.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	15	SF	$40	$600
75032	293.8 to 308.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
75067	308.0 to 342.3 feet	Key Note Segment		5 ft	172			
75033	342.3 to 344.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	13	SF	$40	$500
75068	361.1 to 378.1 feet	Key Note Segment		5 ft	85			
75034	382.3 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
75035	401.2 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
75069	411.3 to 432.0 feet	Key Note Segment		5 ft	104			
75036	432.8 to 443.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
75007	433.0 to 434.0 feet	Vertical Change	.33"	5 ft	5	REF		
75037	445.2 to 454.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
75038	458.1 to 460.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
75039	463.0 to 469.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
75040	471.9 to 487.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
75070	488.5 to 513.1 feet	Key Note Segment		5 ft	123			
75041	513.8 to 541.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	$16,860
75071	542.4 to 568.7 feet	Key Note Segment		5 ft	132			
75042	573.3 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	$13,080
75073	590.8 to 592.3 feet		5.0-6.0%	5 ft	8			
75043	605.5 to 609.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
75044	618.3 to 626.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	$4,620
75045	626.0 to 632.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
75008	633.1 to 634.1 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
75046	638.6 to 641.0 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	12	SF	$120	$1,440
75074	641.5 to 642.7 feet		7.0-8.0%	5 ft	6			
75009	642.0 to 643.0 feet	Vertical Change	-.94"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110200928	BARNETT WAY	STREET END	ALMOND AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75047	645.6 to 653.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
75048	653.4 to 661.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
75072	661.2 to 686.7 feet	Key Note Segment		5 ft	128			
75010	662.1 to 663.1 feet	**Vertical Change**	-.48"	5 ft	5	REF		
75049	688.2 to 699.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
75050	702.7 to 710.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
75011	705.8 to 706.8 feet	**Vertical Change**	-.48"	5 ft	5	REF		
75012	710.0 to 711.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
75051	710.6 to 711.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
75052	714.2 to 725.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
75053	726.3 to 735.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
75054	735.3 to 759.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
75013	738.1 to 739.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
75055	761.7 to 766.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
75056	767.6 to 768.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
75057	774.2 to 783.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
75014	776.5 to 777.5 feet	**Vertical Change**	-.62"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **BARNETT WAY** *Starting at:* **STREET END** **$188,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161358	BARON ST	3470 BARON ST	WESTBERRY BVD	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86817	3.3 to 13.1 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	49	SF	$120	**$5,880**
86818	18.0 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
86839	23.3 to 43.2 feet	Key Note Segment		5 ft	100			
86819	45.4 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
86820	52.1 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
86797	58.5 to 59.5 feet	**Vertical Change**	.88"	5 ft	5	SF	$75	**$375**
86798	71.9 to 72.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
86821	72.1 to 77.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
86840	77.9 to 99.6 feet	Key Note Segment		5 ft	108			
86822	100.4 to 126.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	128	SF	$40	**$5,120**
86799	123.1 to 124.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
86823	130.3 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
86841	134.2 to 156.4 feet	Key Note Segment		5 ft	111			
86800	136.7 to 137.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
86824	156.6 to 182.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	129	SF	$120	**$15,420**
86801	161.5 to 162.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
86802	174.2 to 175.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
86825	182.6 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
86803	186.7 to 187.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
86826	190.4 to 210.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	98	SF	$120	**$11,760**
86804	208.4 to 209.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
86842	210.0 to 240.6 feet	Key Note Segment		5 ft	153			
86805	213.8 to 214.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
86806	221.6 to 222.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
86807	230.3 to 231.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
86808	238.2 to 241.1 feet	**Vertical Change**	.31"	5 ft	15	REF		
86827	243.4 to 245.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
86828	245.9 to 276.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161358	BARON ST	3470 BARON ST	WESTBERRY BVD	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86809	259.4 to 260.4 feet	Vertical Change	.36"	5 ft	5	REF		
86843	276.2 to 296.6 feet	Key Note Segment		5 ft	102			
86810	296.4 to 297.4 feet	Vertical Change	.57"	5 ft	5	REF		
86829	297.5 to 300.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
86844	302.8 to 333.6 feet	Key Note Segment		5 ft	154			
86811	314.8 to 315.8 feet	Vertical Change	.46"	5 ft	5	REF		
86812	323.5 to 324.5 feet	Vertical Change	.5"	5 ft	5	REF		
86830	335.7 to 340.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
86831	341.8 to 358.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
86832	361.9 to 363.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
86845	363.3 to 386.3 feet	Key Note Segment		5 ft	115			
86833	386.3 to 404.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	90	SF	$40	**$3,580**
86813	386.7 to 387.7 feet	Vertical Change	.38"	5 ft	5	REF		
86814	394.0 to 395.0 feet	Vertical Change	.28"	5 ft	5	REF		
86834	404.2 to 413.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
86815	406.7 to 407.7 feet	Vertical Change	-.27"	5 ft	5	REF		
86816	413.1 to 414.1 feet	Vertical Change	-.28"	5 ft	5	REF		
86835	416.0 to 417.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	7	SF	$120	**$780**
86846	418.3 to 439.3 feet	Key Note Segment		5 ft	105			
86836	441.0 to 444.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
86837	445.2 to 449.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
86838	451.9 to 460.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
86847	459.8 to 460.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **BARON ST** *Starting at:* **3470 BARON ST** **$120,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161355	BARON ST	LIBERTY LN	3470 BARON ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86795	0.3 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
86796	4.9 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,900**

TOTAL COST FOR: S *side of* **BARON ST** *Starting at:* **LIBERTY LN** **$11,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161544	BARON ST	WESTBERRY BVD	LIBERTY LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88079	0.0 to 11.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
88062	6.2 to 7.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
88080	13.6 to 26.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
88108	26.3 to 47.4 feet	Key Note Segment		5 ft	106			
88063	46.6 to 47.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
88081	50.3 to 62.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
88082	64.5 to 71.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
88109	71.1 to 101.4 feet	Key Note Segment		5 ft	152			
88083	104.0 to 105.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
88084	105.2 to 107.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
88085	110.9 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
88064	115.1 to 116.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
88086	128.6 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
88110	129.8 to 160.4 feet	Key Note Segment		5 ft	153			
88065	131.0 to 132.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
88066	134.2 to 135.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
88067	158.6 to 159.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
88087	161.3 to 162.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
88088	164.0 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
88089	173.7 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
88111	196.7 to 217.8 feet	Key Note Segment		5 ft	106			
88068	198.0 to 199.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
88069	208.5 to 209.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
88070	216.7 to 217.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
88090	218.6 to 228.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
88112	228.5 to 248.8 feet	Key Note Segment		5 ft	102			
88091	257.3 to 268.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
88092	272.8 to 279.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161544	BARON ST	WESTBERRY BVD	LIBERTY LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88071	281.2 to 282.2 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
88093	289.1 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,980
88113	298.0 to 328.2 feet	Key Note Segment		5 ft	151			
88094	329.8 to 330.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
88095	333.1 to 341.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
88072	342.7 to 343.7 feet	Vertical Change	.27"	5 ft	5	REF		
88096	343.1 to 347.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
88097	347.3 to 365.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	91	SF	$120	$10,920
88114	365.5 to 385.3 feet	Key Note Segment		5 ft	99			
88073	367.8 to 368.8 feet	Vertical Change	.49"	5 ft	5	REF		
88098	388.2 to 389.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
88099	394.0 to 396.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
88100	397.2 to 400.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
88101	401.3 to 403.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	$1,140
88102	405.2 to 406.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
88103	408.6 to 410.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
88115	411.5 to 440.4 feet	Key Note Segment		5 ft	145			
88074	437.8 to 438.8 feet	Vertical Change	3.54"	5 ft	5	REF		
88075	442.0 to 445.9 feet	Vertical Change	.26"	5 ft	20	LF	$75	$1,463
88104	443.3 to 444.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
88116	447.2 to 467.4 feet	Key Note Segment		5 ft	101			
88076	448.4 to 449.4 feet	Vertical Change	.29"	5 ft	5	REF		
88077	464.8 to 465.8 feet	Vertical Change	.42"	5 ft	5	REF		
88105	472.3 to 478.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
88106	478.4 to 482.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
88078	479.5 to 480.5 feet	Vertical Change	.29"	5 ft	5	REF		
88107	484.4 to 495.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	$6,480
88117	492.1 to 495.8 feet		5.0-6.0%	5 ft	19			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161544	BARON ST	WESTBERRY BVD	LIBERTY LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **BARON ST**	*Starting at:* **WESTBERRY BVD**					**$117,517.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121438	BAY CT	MAINBERRY DR	MAINBERRY DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96529	1.0 to 19.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
96567	19.8 to 38.4 feet	Key Note Segment		5 ft	93			
96530	39.5 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
96508	42.5 to 43.5 feet	**Vertical Change**	-.98"	5 ft	5	REF		
96531	44.8 to 63.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
96532	66.3 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
96568	74.8 to 94.3 feet	Key Note Segment		5 ft	98			
96509	84.6 to 85.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
96533	94.8 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
96569	104.7 to 125.0 feet	Key Note Segment		5 ft	102			
96510	115.4 to 116.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
96534	128.7 to 133.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
96582	133.3 to 134.3 feet		5.0-6.0%	5 ft	5			
96535	133.4 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
96511	138.9 to 139.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
96536	144.7 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
96537	163.1 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
96570	181.6 to 201.8 feet	Key Note Segment		5 ft	101			
96513	182.7 to 183.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
96538	202.4 to 212.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	53	SF	$40	**$2,100**
96514	208.0 to 209.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
96571	213.5 to 232.9 feet	Key Note Segment		5 ft	97			
96515	223.5 to 224.5 feet	**Vertical Change**	-.5"	5 ft	5	REF		
96539	235.9 to 241.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
96540	241.2 to 245.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
96541	245.1 to 258.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
96542	258.5 to 268.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
96516	265.8 to 266.8 feet	**Vertical Change**	.37"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121438	BAY CT	MAINBERRY DR	MAINBERRY DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96572	268.6 to 288.7 feet	Key Note Segment		5 ft	100			
96517	279.4 to 280.4 feet	Vertical Change	-.42"	5 ft	5	REF		
96543	289.3 to 292.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$720
96544	295.3 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
96545	303.0 to 304.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
96518	305.2 to 306.2 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
96573	307.2 to 327.6 feet	Key Note Segment		5 ft	102			
96574	347.3 to 367.3 feet	Key Note Segment		5 ft	100			
96546	368.9 to 370.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
96575	370.4 to 389.0 feet	Key Note Segment		5 ft	93			
96547	390.1 to 397.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
96548	402.9 to 410.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
96576	415.4 to 435.8 feet	Key Note Segment		5 ft	102			
96519	416.0 to 417.0 feet	Vertical Change	-.48"	5 ft	5	REF		
96549	436.0 to 437.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$220
96520	436.1 to 437.1 feet	Vertical Change	1.11"	5 ft	5	REF		
96521	438.4 to 439.4 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
96550	441.8 to 443.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
96551	444.8 to 461.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	$10,200
96522	454.3 to 455.3 feet	Vertical Change	.31"	5 ft	5	REF		
96577	461.8 to 492.0 feet	Key Note Segment		5 ft	151			
96523	481.8 to 482.8 feet	Vertical Change	.3"	5 ft	5	REF		
96552	499.0 to 502.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
96578	502.8 to 522.8 feet	Key Note Segment		5 ft	100			
96553	523.3 to 541.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	89	SF	$40	$3,540
96524	537.8 to 538.8 feet	Vertical Change	.32"	5 ft	5	REF		
96554	543.1 to 551.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	$4,860
96555	551.9 to 561.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121438	BAY CT	MAINBERRY DR	MAINBERRY DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96556	566.4 to 578.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
96525	575.6 to 576.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
96579	579.3 to 599.7 feet	Key Note Segment		5 ft	102			
96557	600.8 to 603.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
96558	603.2 to 609.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
96580	609.3 to 630.9 feet	Key Note Segment		5 ft	108			
96559	632.2 to 633.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
96560	634.1 to 635.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96561	638.9 to 649.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
96562	649.6 to 654.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
96526	652.6 to 653.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
96563	655.4 to 657.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
96527	659.5 to 660.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
96564	659.5 to 660.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96581	663.3 to 682.3 feet	Key Note Segment		5 ft	95			
96528	673.1 to 674.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
96565	683.8 to 690.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
96566	695.6 to 704.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: S/E/N *side of* **BAY CT** *Starting at:* **MAINBERRY DR** **$155,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121532	BAY VIEW DR	HARBOR DR	SAND DOLLAR CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97138	13.0 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
97139	19.9 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
97140	28.9 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97141	45.7 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97132	49.9 to 50.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
97133	75.8 to 76.8 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
97142	87.3 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
97143	97.4 to 113.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
97134	101.1 to 102.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
97144	120.1 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
97145	135.9 to 138.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
97136	151.9 to 152.9 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
97146	161.7 to 162.8 feet		5.0-6.0%	5 ft	6			
97147	162.8 to 164.8 feet		6.0-7.0%	5 ft	10			
97137	165.0 to 166.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **BAY VIEW DR** *Starting at:* **HARBOR DR** **$27,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121221	BAY VIEW DR	MAINBERRY DR	HARBOR DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94895	0.6 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
94896	13.1 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
94897	26.9 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
94885	35.7 to 36.7 feet	**Vertical Change**	.82"	5 ft	5	REF		
94898	40.7 to 45.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
94931	47.7 to 62.3 feet	Key Note Segment		5 ft	73			
94886	48.4 to 49.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
94887	62.3 to 63.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
94899	62.3 to 70.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,700**
94900	70.8 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
94888	76.6 to 77.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94901	77.2 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
94902	94.2 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
94932	99.6 to 113.7 feet	Key Note Segment		5 ft	71			
94903	113.7 to 115.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
94904	116.0 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
94905	122.4 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
94906	126.4 to 129.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
94907	133.2 to 147.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
94889	141.7 to 142.7 feet	**Vertical Change**	2.49"	5 ft	5	REF		
94908	147.8 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
94933	155.8 to 169.5 feet	Key Note Segment		5 ft	68			
94909	170.8 to 190.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
94934	190.6 to 204.5 feet	Key Note Segment		5 ft	70			
94910	204.5 to 205.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
94890	205.7 to 206.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
94911	213.1 to 216.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
94912	219.2 to 231.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121221	BAY VIEW DR	MAINBERRY DR	HARBOR DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94913	231.4 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
94914	242.8 to 245.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
94935	245.8 to 260.8 feet	Key Note Segment		5 ft	75			
94891	261.6 to 262.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
94915	262.8 to 270.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
94916	272.3 to 275.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
94917	277.7 to 280.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
94918	282.5 to 286.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
94892	287.4 to 288.4 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
94919	289.1 to 291.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
94920	292.2 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
94936	301.3 to 317.4 feet	Key Note Segment		5 ft	80			
94921	317.8 to 330.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
94893	332.5 to 333.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
94922	332.9 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
94923	337.6 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
94924	348.3 to 349.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
94925	349.9 to 351.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
94926	351.9 to 365.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	69	SF	$120	**$8,280**
94937	367.6 to 383.9 feet	Key Note Segment		5 ft	82			
94927	410.8 to 412.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
94928	417.2 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94938	418.8 to 433.8 feet	Key Note Segment		5 ft	75			
94929	433.8 to 437.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
94894	442.6 to 443.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
94930	442.6 to 444.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: S *side of* **BAY VIEW DR** *Starting at:* **MAINBERRY DR** **$126,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121541	BAY VIEW DR	SAND DOLLAR CT	MAINBERRY DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97239	0.2 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
97240	21.3 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
97241	31.7 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
97242	39.3 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
97243	93.5 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
97237	98.2 to 99.2 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
97238	135.5 to 136.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **BAY VIEW DR** *Starting at:* **SAND DOLLAR CT** **$26,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131446	BAYLOR CT	JEFFERSON AVE	JEFFERSON AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98588	0.8 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
98575	19.9 to 20.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
98589	24.1 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
98607	32.0 to 44.6 feet	Key Note Segment		5 ft	63			
98576	32.9 to 33.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
98590	44.6 to 49.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	23	SF	$40	**$900**
98591	52.0 to 57.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
98608	57.0 to 71.0 feet	Key Note Segment		5 ft	70			
98592	72.7 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
98593	81.8 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98594	89.3 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98578	123.0 to 124.0 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
98579	129.0 to 130.0 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
98609	129.4 to 143.7 feet	Key Note Segment		5 ft	71			
98580	131.1 to 132.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
98595	143.8 to 146.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$620**
98581	144.5 to 145.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
98582	158.0 to 159.0 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
98610	165.8 to 180.3 feet	Key Note Segment		5 ft	73			
98596	180.4 to 181.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
98611	189.5 to 204.7 feet	Key Note Segment		5 ft	76			
98597	206.0 to 208.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
98598	208.0 to 209.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98599	231.3 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
98612	233.6 to 248.8 feet	Key Note Segment		5 ft	76			
98600	259.3 to 262.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
98601	262.3 to 263.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98602	277.7 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131446	BAYLOR CT	JEFFERSON AVE	JEFFERSON AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98583	285.2 to 286.2 feet	**Vertical Change**	1.11"	5 ft	5	REF		
98603	288.2 to 295.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,620**
98613	296.4 to 311.0 feet	Key Note Segment		5 ft	73			
98584	296.8 to 297.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
98585	309.2 to 310.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
98604	319.5 to 325.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
98614	325.6 to 340.4 feet	Key Note Segment		5 ft	74			
98605	340.5 to 342.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	10	SF	$40	**$380**
98586	341.2 to 342.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
98606	345.3 to 369.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
98587	357.7 to 358.7 feet	**Vertical Change**	.63"	5 ft	5	REF		

TOTAL COST FOR: E/N/W *side of* **BAYLOR CT** *Starting at:* **JEFFERSON AVE** **$56,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131314	BEECHWOOD WAY	ASPEN LN	SUNDANCE LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62895	0.0 to 4.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
62879	5.8 to 6.8 feet	**Vertical Change**	.86"	5 ft	5	SF	$75	**$375**
62896	11.4 to 23.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
62939	23.3 to 47.4 feet	Key Note Segment		5 ft	121			
62897	49.6 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
62940	56.5 to 82.4 feet	Key Note Segment		5 ft	130			
62881	77.7 to 78.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
62898	83.5 to 101.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
62899	104.3 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
62900	119.3 to 127.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
62901	129.1 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62941	130.5 to 154.7 feet	Key Note Segment		5 ft	121			
62902	154.7 to 159.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
62903	162.0 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
62904	175.8 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
62942	184.3 to 208.6 feet	Key Note Segment		5 ft	122			
62882	184.6 to 185.6 feet	**Vertical Change**	-.6"	5 ft	5	REF		
62905	208.6 to 212.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
62906	214.4 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
62943	217.6 to 241.7 feet	Key Note Segment		5 ft	121			
62907	241.7 to 246.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$860**
62908	252.1 to 267.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
62944	269.8 to 293.5 feet	Key Note Segment		5 ft	119			
62909	293.5 to 304.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,120**
62910	306.7 to 318.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
62956	316.3 to 317.3 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
62911	320.3 to 332.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
62912	335.6 to 343.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131314	BEECHWOOD WAY	ASPEN LN	SUNDANCE LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62945	344.4 to 368.5 feet	Key Note Segment		5 ft	121			
62883	345.2 to 346.2 feet	Vertical Change	.33"	5 ft	5	REF		
62913	374.2 to 375.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
62946	375.5 to 400.9 feet	Key Note Segment		5 ft	127			
62914	401.3 to 423.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	109	SF	$40	**$4,340**
62915	425.8 to 428.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
62916	432.8 to 446.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
62884	443.9 to 444.9 feet	Vertical Change	.44"	5 ft	5	REF		
62885	451.7 to 452.7 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
62917	453.0 to 455.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
62947	455.0 to 474.9 feet	Key Note Segment		5 ft	100			
62918	474.9 to 476.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	**$400**
62886	479.3 to 480.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
62919	483.1 to 491.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
62887	490.5 to 491.5 feet	Vertical Change	.52"	5 ft	5	REF		
62920	492.3 to 499.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
62948	499.8 to 522.7 feet	Key Note Segment		5 ft	115			
62921	522.9 to 524.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	**$260**
62922	524.2 to 526.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
62923	531.7 to 534.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
62949	536.7 to 559.1 feet	Key Note Segment		5 ft	112			
62888	573.1 to 574.1 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
62924	577.7 to 586.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
62889	585.9 to 586.9 feet	Vertical Change	-.34"	5 ft	5	REF		
62950	589.7 to 613.6 feet	Key Note Segment		5 ft	119			
62890	614.2 to 615.2 feet	Vertical Change	.47"	5 ft	5	REF		
62925	614.6 to 648.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
62926	651.3 to 662.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131314	BEECHWOOD WAY	ASPEN LN	SUNDANCE LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62891	651.4 to 652.4 feet	Vertical Change	2.77"	5 ft	5	REF		
62951	662.9 to 686.8 feet	Key Note Segment		5 ft	120			
62927	686.8 to 694.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
62928	697.6 to 714.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
62952	715.8 to 740.6 feet	Key Note Segment		5 ft	124			
62929	740.6 to 742.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$360**
62930	748.7 to 758.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
62931	761.0 to 768.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
62953	770.7 to 793.1 feet	Key Note Segment		5 ft	112			
62892	771.3 to 772.3 feet	Vertical Change	.26"	5 ft	5	REF		
62932	793.2 to 795.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	13	SF	$40	**$520**
62933	795.8 to 796.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
62893	798.5 to 799.5 feet	Vertical Change	.48"	5 ft	5	REF		
62934	799.3 to 800.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62954	801.6 to 825.9 feet	Key Note Segment		5 ft	122			
62935	826.6 to 831.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
62936	831.4 to 836.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
62937	852.2 to 859.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
62955	861.4 to 884.8 feet	Key Note Segment		5 ft	117			
62894	886.0 to 887.0 feet	Vertical Change	.62"	5 ft	5	SF	$75	**$375**
62938	900.3 to 904.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
62957	905.8 to 907.7 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: N *side of* **BEECHWOOD WAY** *Starting at:* **ASPEN LN** **$177,294.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141017	BEECHWOOD WAY	ASPEN LN	N SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64984	2.3 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
64965	12.9 to 13.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
65029	25.8 to 40.8 feet	Key Note Segment		5 ft	75			
64966	27.2 to 28.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
64985	40.8 to 51.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,180**
64967	47.2 to 48.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
65030	52.4 to 67.5 feet	Key Note Segment		5 ft	76			
64968	60.9 to 61.9 feet	**Vertical Change**	.54"	5 ft	5	REF		
64986	69.6 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64987	71.5 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	257	SF	$120	**$30,840**
64969	82.6 to 83.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
64988	125.2 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
65031	132.4 to 146.9 feet	Key Note Segment		5 ft	73			
64970	147.3 to 148.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
64989	147.8 to 151.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
64990	152.8 to 160.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
64971	160.3 to 161.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
65032	160.4 to 173.2 feet	Key Note Segment		5 ft	64			
64991	173.2 to 197.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	122	SF	$40	**$4,880**
64992	203.1 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
64993	218.8 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64994	223.9 to 235.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
64972	225.2 to 226.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
64995	238.6 to 241.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
65033	242.1 to 256.3 feet	Key Note Segment		5 ft	71			
64996	259.4 to 263.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
64997	263.4 to 267.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
65034	267.7 to 282.2 feet	Key Note Segment		5 ft	73			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141017	BEECHWOOD WAY	ASPEN LN	N SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64998	282.2 to 284.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	11	SF	$40	$420
64999	287.0 to 298.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	$6,780
65000	302.9 to 317.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	$8,580
65001	317.5 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	$17,580
64973	333.2 to 334.2 feet	Vertical Change	.26"	5 ft	5	REF		
65035	346.8 to 360.8 feet	Key Note Segment		5 ft	70			
64974	347.8 to 348.8 feet	Vertical Change	.37"	5 ft	5	REF		
64975	361.0 to 362.0 feet	Vertical Change	-.41"	5 ft	5	REF		
65002	361.3 to 364.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$680
65003	365.1 to 373.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
64976	367.7 to 368.7 feet	Vertical Change	.31"	5 ft	5	REF		
65036	373.2 to 386.4 feet	Key Note Segment		5 ft	66			
64977	374.1 to 375.1 feet	Vertical Change	-.34"	5 ft	5	REF		
64978	381.0 to 382.0 feet	Vertical Change	-.27"	5 ft	5	REF		
65004	387.5 to 403.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,600
65005	407.1 to 421.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	$8,820
65006	421.8 to 431.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	$5,760
65007	433.2 to 443.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	$5,940
65008	443.3 to 452.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
65037	452.1 to 467.3 feet	Key Note Segment		5 ft	76			
64980	460.4 to 461.4 feet	Vertical Change	.46"	5 ft	5	REF		
65009	467.3 to 472.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	28	SF	$40	$1,100
65010	473.0 to 476.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
65038	478.0 to 493.4 feet	Key Note Segment		5 ft	77			
64981	487.3 to 488.3 feet	Vertical Change	-.32"	5 ft	5	REF		
65011	493.4 to 495.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$400
65012	495.8 to 531.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	$21,180
64982	510.6 to 511.6 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141017	BEECHWOOD WAY	ASPEN LN	N SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65013	531.8 to 547.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
65014	547.1 to 552.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
65015	554.8 to 558.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
65039	558.1 to 573.3 feet	Key Note Segment		5 ft	76			
65016	574.3 to 578.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
65017	579.7 to 584.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
65040	585.7 to 602.3 feet	Key Note Segment		5 ft	83			
65018	602.3 to 611.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	47	SF	$40	**$1,860**
65019	619.8 to 621.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
65020	624.2 to 626.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
65021	626.8 to 630.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
65022	632.8 to 661.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$17,040**
65041	664.0 to 678.8 feet	Key Note Segment		5 ft	74			
64983	669.7 to 670.7 feet	**Vertical Change**	-.48"	5 ft	5	REF		
65023	681.2 to 684.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
65024	684.7 to 691.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
65042	691.6 to 708.2 feet	Key Note Segment		5 ft	83			
65025	708.2 to 718.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,020**
65026	718.8 to 728.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
65027	728.4 to 730.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
65028	735.8 to 738.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **BEECHWOOD WAY** *Starting at:* **ASPEN LN** **$243,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141031	BEECHWOOD WAY	N SCHNOOR AVE	ASPEN LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65057	0.0 to 3.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
65058	3.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
65043	24.6 to 25.6 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
65059	31.3 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
65092	33.4 to 46.9 feet	Key Note Segment		5 ft	68			
65060	48.3 to 49.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
65061	52.3 to 55.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
65044	59.8 to 60.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
65093	59.9 to 73.6 feet	Key Note Segment		5 ft	68			
65062	75.4 to 79.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
65063	79.9 to 94.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
65045	87.6 to 88.6 feet	**Vertical Change**	.52"	5 ft	5	REF		
65064	94.5 to 110.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
65065	112.1 to 126.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
65066	128.0 to 129.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
65067	129.2 to 134.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
65068	134.1 to 135.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
65094	138.2 to 153.4 feet	Key Note Segment		5 ft	76			
65046	139.3 to 140.3 feet	**Vertical Change**	.46"	5 ft	5	REF		
65069	154.3 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
65095	164.7 to 179.1 feet	Key Note Segment		5 ft	72			
65070	179.1 to 198.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	97	SF	$40	**$3,880**
65047	196.0 to 197.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
65071	215.7 to 240.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
65072	241.1 to 242.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
65096	242.5 to 256.7 feet	Key Note Segment		5 ft	71			
65048	244.5 to 245.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
65073	257.8 to 260.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141031	BEECHWOOD WAY	N SCHNOOR AVE	ASPEN LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65074	261.3 to 270.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
65097	270.9 to 283.9 feet	Key Note Segment		5 ft	65			
65075	283.9 to 294.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,140**
65049	291.8 to 292.8 feet	**Vertical Change**	.7"	5 ft	5	REF		
65076	295.3 to 302.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
65077	305.6 to 313.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,620**
65078	313.6 to 344.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,780**
65050	322.5 to 323.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
65051	326.1 to 327.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
65098	347.0 to 361.7 feet	Key Note Segment		5 ft	74			
65052	355.3 to 356.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
65053	361.9 to 362.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
65079	362.3 to 372.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
65080	372.3 to 373.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
65099	373.6 to 387.8 feet	Key Note Segment		5 ft	71			
65081	387.8 to 397.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	50	SF	$40	**$2,000**
65082	398.9 to 453.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	275	SF	$120	**$32,940**
65100	453.9 to 469.2 feet	Key Note Segment		5 ft	77			
65101	481.8 to 496.3 feet	Key Note Segment		5 ft	73			
65083	498.7 to 524.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
65084	532.7 to 561.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
65102	561.9 to 575.8 feet	Key Note Segment		5 ft	69			
65054	570.3 to 571.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
65085	575.8 to 588.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	63	SF	$40	**$2,500**
65055	576.4 to 577.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
65103	588.3 to 602.3 feet	Key Note Segment		5 ft	70			
65086	604.1 to 611.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
65087	614.7 to 620.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141031	BEECHWOOD WAY	N SCHNOOR AVE	ASPEN LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65088	626.3 to 629.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
65089	639.2 to 666.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,140**
65104	666.1 to 681.3 feet	Key Note Segment		5 ft	76			
65056	675.2 to 676.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
65090	681.6 to 695.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
65105	699.3 to 709.3 feet	Key Note Segment		5 ft	50			
65091	726.0 to 739.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
65106	736.9 to 738.2 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **BEECHWOOD WAY** *Starting at:* **N SCHNOOR AVE** **$225,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131320	BEECHWOOD WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62974	2.2 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
62975	13.7 to 17.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
62976	20.7 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
62977	23.6 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
63020	25.6 to 51.0 feet	Key Note Segment		5 ft	127			
62958	30.5 to 31.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
62978	51.0 to 54.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
63021	58.8 to 82.3 feet	Key Note Segment		5 ft	118			
62979	84.7 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
62980	87.6 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
62981	97.8 to 100.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
62982	103.4 to 132.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
63022	132.8 to 155.2 feet	Key Note Segment		5 ft	112			
62983	156.2 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
63023	165.3 to 185.6 feet	Key Note Segment		5 ft	102			
62984	185.6 to 187.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$420**
62985	198.1 to 205.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
62986	213.8 to 232.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
63024	238.8 to 262.2 feet	Key Note Segment		5 ft	117			
62959	242.6 to 243.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
62987	262.2 to 265.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
62988	266.4 to 267.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
62989	268.8 to 269.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
62990	271.2 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62960	271.8 to 272.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
62991	279.7 to 292.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
63025	294.2 to 315.8 feet	Key Note Segment		5 ft	108			
62992	316.0 to 323.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131320	BEECHWOOD WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63026	323.6 to 348.9 feet	Key Note Segment		5 ft	126			
62993	351.5 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
62994	372.9 to 383.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
62995	386.3 to 397.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
63027	397.0 to 421.7 feet	Key Note Segment		5 ft	124			
62996	422.0 to 425.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
62997	425.8 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62998	429.0 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63028	430.7 to 451.5 feet	Key Note Segment		5 ft	104			
62999	452.8 to 456.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
63000	457.4 to 477.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
63001	483.9 to 499.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
63002	502.4 to 503.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
63029	503.7 to 528.3 feet	Key Note Segment		5 ft	123			
62961	529.3 to 530.3 feet	**Vertical Change**	.88"	5 ft	5	SF	$75	**$375**
63003	533.2 to 540.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
63004	543.2 to 554.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
63030	555.1 to 577.3 feet	Key Note Segment		5 ft	111			
63005	577.3 to 581.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$740**
62963	580.9 to 581.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
63006	583.3 to 584.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62964	586.3 to 587.3 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
63007	593.7 to 604.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
63031	612.4 to 634.0 feet	Key Note Segment		5 ft	108			
62965	623.8 to 624.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
63008	636.9 to 638.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63009	640.4 to 642.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
63032	642.4 to 667.6 feet	Key Note Segment		5 ft	126			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131320	BEECHWOOD WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63010	667.6 to 683.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	82	SF	$40	$3,260
63011	687.7 to 689.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
63012	707.9 to 717.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
63033	717.4 to 740.4 feet	Key Note Segment		5 ft	115			
62966	718.4 to 719.4 feet	Vertical Change	.55"	5 ft	5	REF		
63013	741.4 to 743.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
62967	741.9 to 742.9 feet	Vertical Change	.26"	5 ft	5	REF		
62968	746.1 to 747.1 feet	Vertical Change	.64"	5 ft	5	SF	$75	$375
63034	769.0 to 793.4 feet	Key Note Segment		5 ft	122			
63014	793.4 to 808.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	77	SF	$40	$3,080
62969	794.9 to 795.9 feet	Vertical Change	.28"	5 ft	5	REF		
63015	817.5 to 822.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
63035	823.1 to 846.9 feet	Key Note Segment		5 ft	119			
62970	848.2 to 849.2 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
63016	852.0 to 853.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
62971	852.3 to 853.3 feet	Vertical Change	-.56"	5 ft	5	REF		
63036	856.2 to 879.5 feet	Key Note Segment		5 ft	117			
63017	880.6 to 884.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460
63018	885.7 to 895.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
62972	886.0 to 887.0 feet	Vertical Change	.73"	5 ft	5	REF		
62973	892.7 to 893.7 feet	Vertical Change	.4"	5 ft	5	REF		
63019	896.3 to 908.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,080

TOTAL COST FOR: S *side of* **BEECHWOOD WAY** *Starting at:* **SUNDANCE LN** **$174,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181726	BENT OAK TR	CROWN TERRACE	ORCHARD HILL DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102520	2.5 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
102524	11.6 to 32.3 feet	Key Note Segment		5 ft	103			
102521	33.8 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
102522	35.3 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
102525	40.1 to 59.1 feet	Key Note Segment		5 ft	95			
102523	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102526	71.6 to 94.5 feet	Key Note Segment		5 ft	115			

TOTAL COST FOR: E *side of* **BENT OAK TR** *Starting at:* **CROWN TERRACE** **$5,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181716	BENT OAK TR	IVY GLEN DR	CROWN TERRACE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102495	16.3 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
102491	25.6 to 26.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
102496	34.8 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
102504	42.0 to 60.3 feet	Key Note Segment		5 ft	92			
102492	42.5 to 43.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
102497	60.3 to 61.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
102498	61.3 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102505	65.8 to 87.2 feet	Key Note Segment		5 ft	107			
102499	88.3 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
102500	103.3 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
102501	125.7 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
102493	131.6 to 132.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
102502	141.8 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
102506	162.1 to 185.8 feet	Key Note Segment		5 ft	119			
102503	185.8 to 197.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,260**
102494	193.9 to 194.9 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **BENT OAK TR** *Starting at:* **IVY GLEN DR** **$41,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181559	BENT OAK TR	ORCHARD HILL DR	IVY GLEN DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102093	0.4 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
102084	4.4 to 5.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
102094	4.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
102095	10.9 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
102111	21.4 to 43.9 feet	Key Note Segment		5 ft	113			
102085	33.7 to 34.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
102096	45.5 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
102112	46.8 to 80.2 feet	Key Note Segment		5 ft	167			
102097	80.2 to 82.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
102086	85.0 to 86.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
102098	85.6 to 87.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
102099	91.4 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
102087	96.7 to 97.7 feet	**Vertical Change**	1.69"	5 ft	5	SF	$75	**$375**
102100	103.0 to 112.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
102088	106.7 to 107.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
102101	117.7 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
102113	121.8 to 144.8 feet	Key Note Segment		5 ft	115			
102102	145.8 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
102114	148.2 to 179.1 feet	Key Note Segment		5 ft	155			
102089	148.8 to 149.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
102103	179.1 to 181.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
102104	181.7 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102105	186.3 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
102091	195.8 to 196.8 feet	**Vertical Change**	.46"	5 ft	5	REF		
102106	199.6 to 201.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
102115	202.0 to 225.0 feet	Key Note Segment		5 ft	115			
102092	214.1 to 215.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
102107	225.0 to 227.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181559	BENT OAK TR	ORCHARD HILL DR	IVY GLEN DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102108	230.5 to 232.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
102109	232.3 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102110	238.8 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: W *side of* **BENT OAK TR** *Starting at:* **ORCHARD HILL DR** **$37,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211255	BERNARDI AVE	729 BERNARDI AVE	STADIUM RD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79343	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
79344	3.8 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
79345	18.5 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
79346	32.4 to 45.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
79356	45.0 to 64.1 feet	Key Note Segment		5 ft	95			
79347	65.5 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
79357	75.2 to 94.4 feet	Key Note Segment		5 ft	96			
79336	85.0 to 86.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
79348	95.7 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$20,940**
79349	131.7 to 150.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
79358	151.9 to 171.8 feet	Key Note Segment		5 ft	100			
79350	174.8 to 180.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
79351	182.3 to 185.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
79359	186.5 to 204.3 feet	Key Note Segment		5 ft	89			
79352	205.9 to 209.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
79339	208.8 to 209.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
79353	209.5 to 211.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
79340	212.4 to 213.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
79354	215.3 to 221.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
79341	216.3 to 217.3 feet	**Vertical Change**	.71"	5 ft	5	REF		
79342	221.4 to 222.4 feet	**Vertical Change**	2.45"	5 ft	5	REF		
79355	224.2 to 227.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: N *side of* **BERNARDI AVE** *Starting at:* **729 BERNARDI AVE** **$72,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211253	BERNARDI AVE	MUNRAS AVE	729 BERNARDI AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79323	0.0 to 8.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
79324	8.5 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
79321	11.4 to 12.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
79325	20.9 to 24.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
79333	25.2 to 45.0 feet	Key Note Segment		5 ft	99			
79326	46.1 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79322	51.8 to 52.8 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
79327	55.3 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
79328	62.8 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
79329	66.4 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
79334	74.2 to 93.4 feet	Key Note Segment		5 ft	96			
79330	93.8 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
79331	95.0 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
79335	107.2 to 126.2 feet	Key Note Segment		5 ft	95			
79332	127.8 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **BERNARDI AVE** *Starting at:* **MUNRAS AVE** **$30,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211512	BERNARDI AVE	STADIUM RD	MUNRAS AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80183	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
80184	4.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
80185	15.3 to 19.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
80206	21.0 to 46.3 feet	Key Note Segment		5 ft	127			
80186	46.8 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
80187	51.9 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
80188	61.1 to 74.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
80176	73.6 to 74.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
80207	74.9 to 95.2 feet	Key Note Segment		5 ft	101			
80189	96.3 to 116.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,120**
80177	102.5 to 103.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
80208	116.5 to 136.0 feet	Key Note Segment		5 ft	98			
80190	137.0 to 162.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,420**
80191	162.7 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
80192	169.7 to 189.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
80178	187.3 to 188.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
80209	191.2 to 212.0 feet	Key Note Segment		5 ft	104			
80193	213.1 to 222.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
80179	214.6 to 215.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
80210	223.5 to 243.5 feet	Key Note Segment		5 ft	100			
80194	244.6 to 253.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
80195	256.2 to 275.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
80196	278.4 to 293.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
80197	294.8 to 304.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
80211	304.1 to 323.6 feet	Key Note Segment		5 ft	98			
80198	324.8 to 331.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
80212	332.2 to 351.7 feet	Key Note Segment		5 ft	98			
80180	333.0 to 334.0 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211512	BERNARDI AVE	STADIUM RD	MUNRAS AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80181	351.9 to 352.9 feet	Vertical Change	-.31"	5 ft	5	REF		
80199	353.3 to 360.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
80200	360.3 to 368.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
80201	368.6 to 381.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
80202	381.3 to 383.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
80203	387.4 to 394.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
80213	395.6 to 416.4 feet	Key Note Segment		5 ft	104			
80204	417.8 to 418.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
80205	418.9 to 430.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
80182	427.8 to 428.8 feet	Vertical Change	.71"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **BERNARDI AVE** *Starting at:* **STADIUM RD** **$141,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110932	BERRY DR	APPLE TREE DR	PEANUT DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89983	0.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
89984	3.3 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
89985	8.1 to 20.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
89986	21.0 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
89975	21.6 to 22.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
89987	27.3 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
89976	29.3 to 30.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
89988	30.7 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
89977	32.3 to 33.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
89978	39.6 to 40.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
89989	42.9 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
89990	50.5 to 52.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
89979	50.9 to 51.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
89991	55.6 to 62.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
89992	65.3 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
89980	85.0 to 86.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
89993	111.1 to 120.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
89994	120.6 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
89981	122.4 to 123.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
89982	134.6 to 135.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
89995	143.2 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
89996	144.4 to 145.9 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: E *side of* **BERRY DR** *Starting at:* **APPLE TREE DR** **$75,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110928	BERRY DR	CHERRY TREE DR	ORANGE TREE DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89944	0.8 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
89945	9.0 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
89946	27.7 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89947	37.5 to 39.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
89948	39.8 to 41.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89941	47.8 to 48.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
89949	53.3 to 56.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
89950	61.9 to 63.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
89951	64.7 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89952	77.3 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89953	80.6 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89954	86.0 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89942	91.5 to 92.5 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
89955	94.4 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
89956	101.8 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
89957	120.6 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
89958	137.5 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89959	146.3 to 147.9 feet		5.0-6.0%	5 ft	8			
89943	148.0 to 149.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **BERRY DR** *Starting at:* **CHERRY TREE DR** **$33,525.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110930	BERRY DR	ORANGE TREE DR	APPLE TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89966	1.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
89960	10.6 to 11.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
89961	22.2 to 23.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
89967	22.3 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,100**
89968	37.0 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
89962	37.6 to 38.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
89969	43.5 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
89970	49.1 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
89971	73.9 to 78.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
89963	79.2 to 80.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		
89972	79.4 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$25,020**
89964	107.3 to 108.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
89973	124.3 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
89965	125.1 to 126.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
89974	137.5 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: E *side of* **BERRY DR** *Starting at:* **ORANGE TREE DR** **$70,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110856	BERRY DR	PEANUT DR	PEAR TREE DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89629	0.0 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
89630	10.5 to 20.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,940**
89631	25.7 to 47.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
89632	47.7 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89633	56.3 to 60.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
89634	60.8 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
89635	72.0 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
89636	84.3 to 85.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
89637	88.1 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
89625	89.7 to 90.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
89638	97.0 to 99.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
89639	101.2 to 107.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
89626	101.5 to 102.5 feet	**Vertical Change**	1.1"	5 ft	5	REF		
89640	110.4 to 112.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
89641	112.8 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89627	116.9 to 117.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
89642	118.0 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
89628	123.4 to 124.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
89643	123.7 to 130.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
89644	130.0 to 142.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
89645	142.3 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
89646	144.2 to 146.1 feet		5.0-6.0%	5 ft	10			
89647	146.1 to 147.3 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: E *side of* **BERRY DR** *Starting at:* **PEANUT DR** **$62,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110941	BERRY DR	PEAR TREE DR	CHERRY TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90041	0.0 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
90091	9.8 to 28.8 feet	Key Note Segment		5 ft	95			
90010	18.0 to 19.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
90042	30.8 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
90043	37.6 to 39.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
90044	42.5 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
90045	48.6 to 57.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
90046	58.3 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90092	59.8 to 78.8 feet	Key Note Segment		5 ft	95			
90047	79.7 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
90048	82.8 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
90093	96.9 to 117.1 feet	Key Note Segment		5 ft	101			
90012	100.5 to 101.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
90049	119.8 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
90094	123.7 to 143.8 feet	Key Note Segment		5 ft	101			
90050	144.6 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
90051	151.4 to 157.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
90052	160.9 to 164.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
90053	166.1 to 180.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
90095	183.0 to 203.5 feet	Key Note Segment		5 ft	103			
90054	204.5 to 209.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$960**
90013	208.3 to 209.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
90096	209.3 to 229.8 feet	Key Note Segment		5 ft	103			
90014	212.3 to 213.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
90015	219.5 to 220.5 feet	**Vertical Change**	-.58"	5 ft	5	REF		
90055	230.9 to 240.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
90056	240.3 to 244.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
90057	244.3 to 251.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110941	BERRY DR	PEAR TREE DR	CHERRY TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90058	251.3 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
90097	269.9 to 289.5 feet	Key Note Segment		5 ft	98			
90059	290.4 to 292.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
90060	292.0 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90016	295.2 to 296.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
90098	295.2 to 316.0 feet	Key Note Segment		5 ft	104			
90017	306.0 to 307.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
90018	312.8 to 313.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
90061	317.0 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
90019	317.1 to 318.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
90062	324.7 to 335.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
90020	330.5 to 331.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
90063	339.0 to 356.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
90099	356.3 to 375.8 feet	Key Note Segment		5 ft	98			
90021	359.6 to 360.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
90064	377.2 to 380.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
90100	381.7 to 401.8 feet	Key Note Segment		5 ft	101			
90022	384.9 to 385.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
90065	404.4 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
90066	434.2 to 439.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
90101	442.6 to 461.7 feet	Key Note Segment		5 ft	96			
90067	465.3 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90102	468.2 to 488.0 feet	Key Note Segment		5 ft	99			
90068	494.9 to 498.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
90069	505.0 to 506.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
90070	506.8 to 508.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90071	512.0 to 518.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
90024	515.5 to 516.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110941	BERRY DR	PEAR TREE DR	CHERRY TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90072	526.8 to 528.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
90103	528.6 to 548.0 feet	Key Note Segment		5 ft	97			
90025	538.7 to 539.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
90104	554.5 to 574.6 feet	Key Note Segment		5 ft	101			
90026	564.7 to 565.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
90073	577.2 to 586.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
90027	588.0 to 589.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
90074	589.9 to 591.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
90075	597.3 to 611.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
90076	614.3 to 615.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
90105	615.6 to 633.5 feet	Key Note Segment		5 ft	90			
90077	634.8 to 641.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
90028	640.3 to 641.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
90106	641.5 to 659.8 feet	Key Note Segment		5 ft	92			
90029	661.7 to 662.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
90078	663.0 to 674.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
90079	677.5 to 701.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
90030	687.1 to 688.1 feet	**Vertical Change**	.61"	5 ft	5	REF		
90031	699.2 to 700.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
90107	701.4 to 719.9 feet	Key Note Segment		5 ft	93			
90032	721.7 to 722.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
90080	721.7 to 726.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
90033	725.9 to 726.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
90108	727.6 to 746.0 feet	Key Note Segment		5 ft	92			
90034	736.6 to 737.6 feet	**Vertical Change**	-.51"	5 ft	5	REF		
90035	748.0 to 749.0 feet	**Vertical Change**	-.49"	5 ft	5	REF		
90081	748.9 to 761.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
90082	768.5 to 776.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110941	BERRY DR	PEAR TREE DR	CHERRY TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90083	780.6 to 783.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
90109	786.9 to 807.1 feet	Key Note Segment		5 ft	101			
90084	807.7 to 810.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
90037	807.9 to 808.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
90085	812.6 to 817.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
90038	819.8 to 820.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
90086	820.0 to 823.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90087	831.8 to 834.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
90110	837.4 to 866.8 feet	Key Note Segment		5 ft	147			
90039	866.9 to 867.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
90088	867.6 to 869.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
90040	871.8 to 872.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
90089	878.1 to 880.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
90090	906.9 to 907.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **BERRY DR** *Starting at:* **PEAR TREE DR** **$187,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121013	BERRY DRIVE	MAPLE STREET	PLUMAS STREET	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94251	0.8 to 5.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
94252	5.3 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
94253	12.7 to 18.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
94254	18.2 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
94242	21.7 to 22.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
94255	22.1 to 32.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
94256	32.3 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
94257	37.0 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
94243	40.0 to 41.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
94258	44.2 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
94244	53.9 to 54.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
94259	59.8 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
94260	63.0 to 66.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
94261	68.8 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
94262	76.4 to 86.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
94245	85.6 to 86.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
94246	88.0 to 89.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
94263	92.3 to 98.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
94247	92.8 to 93.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
94248	95.1 to 96.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
94264	100.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
94249	101.3 to 102.3 feet	**Vertical Change**	.74"	5 ft	5	REF		
94265	108.8 to 112.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
94266	112.7 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
94267	120.9 to 122.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94268	126.1 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
94269	134.9 to 136.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
94270	139.3 to 141.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121013	BERRY DRIVE	MAPLE STREET	PLUMAS STREET	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94271	141.8 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94272	142.8 to 145.5 feet		5.0-6.0%	5 ft	13			
94273	142.8 to 145.5 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,620**
94250	145.7 to 146.7 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **BERRY DRIVE** *Starting at:* **MAPLE STREET** **$62,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121016	BERRY DRIVE	PLUMAS STREET	MAPLE STREET	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94280	0.6 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
94281	9.5 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
94282	17.3 to 21.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
94296	21.9 to 43.2 feet	Key Note Segment		5 ft	107			
94283	43.6 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
94297	47.8 to 68.4 feet	Key Note Segment		5 ft	103			
94274	67.9 to 68.9 feet	**Vertical Change**	.86"	5 ft	5	REF		
94284	71.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
94285	77.3 to 81.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
94286	85.0 to 86.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
94287	89.8 to 92.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
94288	96.5 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
94298	102.0 to 128.3 feet	Key Note Segment		5 ft	132			
94275	113.1 to 114.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94289	130.6 to 135.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
94290	137.3 to 140.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
94291	141.6 to 142.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
94292	145.2 to 146.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
94293	146.6 to 150.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
94299	150.4 to 166.4 feet	Key Note Segment		5 ft	80			
94276	152.0 to 153.0 feet	**Vertical Change**	-.53"	5 ft	5	REF		
94300	168.0 to 201.4 feet	Key Note Segment		5 ft	167			
94277	168.7 to 169.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
94278	189.2 to 190.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
94279	201.0 to 202.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
94294	203.0 to 205.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
94295	206.0 to 207.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: W *side of* **BERRY DRIVE** *Starting at:* **PLUMAS STREET** **$27,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091305	BILBAO CT	1407 BILBAO CT	SAN SEBASTIAN WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129926	0.7 to 14.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
129905	3.4 to 4.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129927	15.1 to 16.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
129906	16.2 to 17.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
129928	16.8 to 20.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
129907	19.8 to 20.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
129929	20.7 to 25.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,760**
129930	25.4 to 30.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
129949	30.8 to 49.8 feet	Key Note Segment		5 ft	95			
129931	49.8 to 52.8 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	15	SF	$40	**$600**
129908	50.1 to 51.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
129932	53.3 to 54.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
129933	58.3 to 59.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
129934	62.3 to 68.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
129950	70.3 to 89.2 feet	Key Note Segment		5 ft	95			
129909	72.8 to 73.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
129935	93.9 to 97.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
129936	99.6 to 104.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
129910	99.8 to 100.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
129911	103.3 to 104.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129937	107.2 to 108.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
129938	108.4 to 112.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
129912	112.1 to 113.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
129939	114.0 to 118.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	20	SF	$120	**$2,400**
129951	118.0 to 136.8 feet	Key Note Segment		5 ft	94			
129940	140.2 to 141.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
129952	144.4 to 163.1 feet	Key Note Segment		5 ft	94			
129914	144.6 to 145.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091305	BILBAO CT	1407 BILBAO CT	SAN SEBASTIAN WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129915	146.9 to 147.9 feet	Vertical Change	.29"	5 ft	5	REF		
129916	159.3 to 160.3 feet	Vertical Change	.32"	5 ft	5	REF		
129917	163.3 to 168.1 feet	Vertical Change	.51"	5 ft	24	REF		
129941	166.6 to 171.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
129942	175.4 to 176.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
129918	177.0 to 178.0 feet	Vertical Change	.27"	5 ft	5	REF		
129943	177.4 to 182.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
129919	181.1 to 182.1 feet	Vertical Change	.36"	5 ft	5	REF		
129944	182.7 to 185.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
129945	185.6 to 212.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	135	SF	$120	**$16,200**
129953	212.6 to 232.3 feet	Key Note Segment		5 ft	99			
129920	213.6 to 214.6 feet	Vertical Change	.26"	5 ft	5	REF		
129921	227.3 to 228.3 feet	Vertical Change	.44"	5 ft	5	REF		
129922	232.4 to 233.4 feet	Vertical Change	.27"	5 ft	5	REF		
129946	233.8 to 238.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	23	SF	$120	**$2,700**
129954	239.3 to 257.8 feet	Key Note Segment		5 ft	93			
129923	239.6 to 240.6 feet	Vertical Change	.39"	5 ft	5	REF		
129947	258.8 to 267.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	43	SF	$120	**$5,160**
129924	259.8 to 260.8 feet	Vertical Change	.29"	5 ft	5	REF		
129925	269.1 to 270.1 feet	Vertical Change	.39"	5 ft	5	LF	$75	**$375**
129948	271.4 to 281.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	50	SF	$120	**$5,940**

TOTAL COST FOR: N *side of* **BILBAO CT** *Starting at:* **1407 BILBAO CT** **$74,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091303	BILBAO CT	SAN SEBASTIAN WAY	1407 BILBAO CT	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129875	1.7 to 13.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
129876	18.2 to 26.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
129867	25.7 to 26.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
129877	27.3 to 28.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
129878	29.3 to 35.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
129879	35.5 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
129880	48.3 to 51.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
129881	54.8 to 65.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
129868	63.3 to 64.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
129882	67.2 to 75.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
129869	76.3 to 77.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
129883	77.9 to 82.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
129884	86.0 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
129885	97.9 to 99.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
129886	103.3 to 107.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
129887	107.2 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
129888	124.2 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
129889	148.3 to 162.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,220**
129890	165.3 to 169.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
129891	171.4 to 176.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
129892	181.9 to 192.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
129870	192.7 to 193.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
129893	193.8 to 195.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
129894	195.8 to 197.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
129895	199.2 to 200.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
129896	201.5 to 203.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
129897	206.0 to 216.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
129871	214.0 to 215.0 feet	**Vertical Change**	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091303	BILBAO CT	SAN SEBASTIAN WAY	1407 BILBAO CT	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129898	216.7 to 219.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
129872	218.7 to 219.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
129899	219.9 to 230.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
129900	232.8 to 240.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
129901	241.2 to 255.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
129902	257.0 to 258.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
129903	262.6 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
129904	268.8 to 281.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
129873	275.1 to 276.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
129874	279.7 to 280.7 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **BILBAO CT** *Starting at:* **SAN SEBASTIAN WAY** **$134,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021654	BLOKER ST	E LINCOLN AVE	828 BLOKER ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119320	0.5 to 3.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
119321	8.3 to 9.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$660**
119315	8.7 to 9.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119322	9.4 to 10.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
119323	15.0 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
119328	20.8 to 32.9 feet	Key Note Segment		5 ft	61			
119324	33.9 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
119325	35.8 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
119317	40.3 to 41.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
119326	50.5 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
119318	53.2 to 54.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
119319	55.1 to 56.1 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
119329	63.8 to 76.2 feet	Key Note Segment		5 ft	62			
119327	78.1 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: W *side of* **BLOKER ST** *Starting at:* **E LINCOLN AVE** **$13,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191507	BLUEBERRY LN	712 BLUEBERRY LN	E ALMOND AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74777	6.4 to 8.3 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	9	SF	$120	**$1,026**
74778	10.7 to 14.3 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	16	SF	$120	**$1,944**
74774	18.9 to 19.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$338**
74779	20.3 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,074**
74780	43.0 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
74781	54.6 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
74787	63.0 to 84.8 feet	Key Note Segment		5 ft	98			
74788	89.1 to 110.2 feet	Key Note Segment		5 ft	95			
74782	112.8 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
74783	121.1 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,038**
74784	151.3 to 154.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,890**
74789	155.4 to 177.2 feet	Key Note Segment		5 ft	98			
74776	177.2 to 178.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
74785	178.8 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74790	180.9 to 202.8 feet	Key Note Segment		5 ft	99			
74786	203.9 to 210.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,672**

TOTAL COST FOR: W *side of* **BLUEBERRY LN** *Starting at:* **712 BLUEBERRY LN** **$42,511.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191510	BLUEBERRY LN	E ALMOND AVE	MADARIN ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74791	1.0 to 2.0 feet	Vertical Change	.41"	5 ft	5	LF	$75	$338
74798	2.1 to 10.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	$4,374
74811	10.2 to 31.3 feet	Key Note Segment		5 ft	95			
74792	10.3 to 11.3 feet	Vertical Change	.3"	5 ft	5	REF		
74793	31.2 to 32.2 feet	Vertical Change	.46"	5 ft	5	REF		
74799	31.5 to 32.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$540
74800	34.6 to 36.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$756
74812	36.0 to 56.8 feet	Key Note Segment		5 ft	94			
74794	46.1 to 47.1 feet	Vertical Change	.35"	5 ft	5	REF		
74801	58.6 to 62.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,944
74802	65.8 to 69.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,728
74803	71.2 to 95.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	$12,906
74813	95.9 to 117.0 feet	Key Note Segment		5 ft	95			
74795	107.2 to 108.2 feet	Vertical Change	.33"	5 ft	5	REF		
74804	118.8 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,242
74796	122.6 to 123.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	$338
74814	122.7 to 143.5 feet	Key Note Segment		5 ft	94			
74805	151.2 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,616
74806	167.9 to 170.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,296
74797	170.3 to 171.3 feet	Vertical Change	.42"	5 ft	5	REF		
74807	171.3 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,782
74808	177.4 to 182.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,484
74815	182.0 to 203.8 feet	Key Note Segment		5 ft	98			
74809	204.4 to 208.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$648
74816	208.2 to 229.9 feet	Key Note Segment		5 ft	98			
74810	230.5 to 250.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	91	SF	$40	$3,654

TOTAL COST FOR: E *side of* **BLUEBERRY LN** *Starting at:* **E ALMOND AVE** **$39,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191505	BLUEBERRY LN	MADARIN ST	692 BLUEBERRY LN	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74772	0.0 to 1.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$810**
74771	0.4 to 1.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
74773	6.6 to 28.8 feet	Key Note Segment		5 ft	100			

TOTAL COST FOR: W *side of* **BLUEBERRY LN** *Starting at:* **MADARIN ST** **$810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110210941	BLUERIDGE DR	414 BLUERIDGE DR	GAMAY ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78458	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
78464	10.0 to 30.6 feet	Key Note Segment		5 ft	103			
78451	10.8 to 11.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
78452	19.1 to 20.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
78459	32.3 to 37.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
78465	39.2 to 60.1 feet	Key Note Segment		5 ft	104			
78460	60.1 to 67.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	37	SF	$40	**$1,480**
78461	67.5 to 114.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	237	SF	$120	**$28,380**
78453	103.3 to 104.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78466	114.8 to 135.9 feet	Key Note Segment		5 ft	106			
78454	134.5 to 135.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78462	137.3 to 140.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
78467	140.9 to 160.6 feet	Key Note Segment		5 ft	99			
78455	151.0 to 152.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
78463	161.2 to 181.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	103	SF	$40	**$4,100**
78456	170.8 to 171.8 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **BLUERIDGE DR** *Starting at:* **414 BLUERIDGE DR** **$40,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211034	BLUERIDGE DR	709 DEERWOOD DR	MERLOT AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78903	1.3 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
78904	14.3 to 21.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
78900	22.5 to 23.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
78905	25.7 to 30.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
78906	30.9 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
78907	40.2 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
78901	53.6 to 54.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
78908	54.5 to 55.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
78909	57.2 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
78910	65.2 to 81.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
78902	81.1 to 82.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
78911	84.3 to 113.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	145	SF	$120	**$17,400**
78912	113.3 to 116.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: E *side of* **BLUERIDGE DR** *Starting at:* **709 DEERWOOD DR** **$61,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211032	BLUERIDGE DR	DEERWOOD DR	705 DEERWOOD DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78897	0.4 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
78898	7.3 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
78899	12.3 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**

TOTAL COST FOR: E *side of* **BLUERIDGE DR** *Starting at:* **DEERWOOD DR** **$8,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N	2110210939	BLUERIDGE DR	GAMAY ST	404 BLUERIDGE DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78433	0.3 to 19.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
78445	19.9 to 40.7 feet	Key Note Segment		5 ft	104			
78428	29.3 to 30.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
78429	39.3 to 40.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
78434	40.7 to 46.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	26	SF	$40	**$1,060**
78446	46.5 to 66.7 feet	Key Note Segment		5 ft	101			
78435	67.0 to 87.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	103	SF	$40	**$4,120**
78436	90.5 to 101.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
78437	102.8 to 105.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
78438	106.3 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
78447	121.8 to 141.8 feet	Key Note Segment		5 ft	100			
78430	140.7 to 141.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
78439	142.8 to 148.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
78448	149.8 to 170.5 feet	Key Note Segment		5 ft	103			
78440	173.4 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
78449	183.4 to 206.6 feet	Key Note Segment		5 ft	116			
78431	195.7 to 196.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
78432	205.5 to 206.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
78441	209.3 to 215.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
78450	215.3 to 233.5 feet	Key Note Segment		5 ft	91			
78442	233.8 to 240.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	35	SF	$40	**$1,400**
78443	244.4 to 247.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
78444	247.8 to 259.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**

TOTAL COST FOR: E/N *side of* **BLUERIDGE DR** *Starting at:* **GAMAY ST** **$57,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211012	BLUERIDGE DR	MERLOT AVE	DEERWOOD DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78721	0.3 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
78722	2.8 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
78723	8.8 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
78736	21.4 to 40.7 feet	Key Note Segment		5 ft	97			
78718	30.3 to 31.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
78724	42.5 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
78725	46.3 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
78719	49.0 to 50.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
78726	53.8 to 64.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
78737	65.6 to 84.2 feet	Key Note Segment		5 ft	93			
78727	86.1 to 89.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
78738	89.7 to 109.3 feet	Key Note Segment		5 ft	98			
78728	109.8 to 145.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	180	SF	$120	**$21,600**
78729	145.8 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
78730	153.5 to 170.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
78731	170.7 to 175.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
78732	175.1 to 185.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
78733	185.9 to 194.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
78734	194.4 to 196.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
78735	197.4 to 202.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: W *side of* **BLUERIDGE DR** *Starting at:* **MERLOT AVE** **$75,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201153	BO TREE LN	CRYSTAL WAY	EMILY WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76283	2.2 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
76284	6.2 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
76285	35.2 to 39.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
76281	37.7 to 38.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
76286	42.2 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
76287	61.7 to 68.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
76288	70.8 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
76282	75.1 to 76.1 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **BO TREE LN** *Starting at:* **CRYSTAL WAY** **$35,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201203	BO TREE LN	DIAMOND WAY	MAJESTIC WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76369	0.0 to 3.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
76370	5.9 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
76363	8.2 to 9.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
76371	10.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
76372	27.3 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
76373	46.0 to 47.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
76381	47.6 to 67.6 feet	Key Note Segment		5 ft	100			
76374	68.0 to 74.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,200**
76382	74.0 to 93.1 feet	Key Note Segment		5 ft	96			
76375	94.2 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
76376	99.1 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,360**
76364	129.2 to 130.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
76377	136.7 to 142.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
76383	143.1 to 162.4 feet	Key Note Segment		5 ft	97			
76378	162.6 to 167.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
76384	168.8 to 189.3 feet	Key Note Segment		5 ft	103			
76366	169.0 to 172.9 feet	**Vertical Change**	.44"	5 ft	20	REF		
76367	185.6 to 186.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
76379	190.6 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
76380	199.7 to 202.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
76368	201.8 to 202.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **BO TREE LN** *Starting at:* **DIAMOND WAY** **$58,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201200	BO TREE LN	EMILY WAY	DIAMOND WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76317	0.0 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
76318	3.1 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
76319	7.7 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
76302	8.4 to 9.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
76349	14.8 to 34.3 feet	Key Note Segment		5 ft	97			
76303	32.1 to 33.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
76320	36.3 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
76350	40.6 to 60.8 feet	Key Note Segment		5 ft	101			
76304	50.8 to 51.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
76321	61.0 to 87.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	132	SF	$40	**$5,280**
76322	89.9 to 100.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
76305	92.8 to 93.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
76351	101.1 to 119.8 feet	Key Note Segment		5 ft	94			
76306	117.3 to 118.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
76323	121.1 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
76352	126.8 to 146.4 feet	Key Note Segment		5 ft	98			
76324	147.9 to 149.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
76325	151.4 to 156.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
76326	157.0 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
76307	160.0 to 161.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
76327	161.8 to 166.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
76328	166.6 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
76329	184.2 to 186.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
76353	186.6 to 206.4 feet	Key Note Segment		5 ft	99			
76330	206.8 to 212.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
76308	211.9 to 212.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
76354	212.8 to 232.8 feet	Key Note Segment		5 ft	100			
76331	233.8 to 235.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201200	BO TREE LN	EMILY WAY	DIAMOND WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76332	235.2 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
76333	244.4 to 251.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
76334	251.8 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
76355	272.2 to 292.3 feet	Key Note Segment		5 ft	101			
76309	276.5 to 277.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
76310	283.2 to 284.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
76335	293.3 to 298.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
76356	298.7 to 318.4 feet	Key Note Segment		5 ft	98			
76311	309.0 to 310.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
76312	315.6 to 316.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
76336	319.3 to 333.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
76337	352.4 to 359.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
76357	359.1 to 378.8 feet	Key Note Segment		5 ft	99			
76338	379.2 to 381.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
76358	385.6 to 405.4 feet	Key Note Segment		5 ft	99			
76314	395.3 to 396.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
76339	406.6 to 411.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
76340	419.1 to 421.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
76341	422.3 to 438.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
76342	441.3 to 445.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
76359	445.4 to 464.8 feet	Key Note Segment		5 ft	97			
76343	465.8 to 471.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
76360	471.4 to 490.7 feet	Key Note Segment		5 ft	97			
76315	472.8 to 473.8 feet	**Vertical Change**	.72"	5 ft	5	REF		
76316	481.3 to 482.3 feet	**Vertical Change**	.78"	5 ft	5	REF		
76344	491.4 to 501.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	52	SF	$40	**$2,060**
76345	501.7 to 519.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,860**
76346	523.0 to 528.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201200	BO TREE LN	EMILY WAY	DIAMOND WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76361	531.6 to 551.3 feet	Key Note Segment		5 ft	98			
76347	551.9 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
76362	557.4 to 576.4 feet	Key Note Segment		5 ft	95			
76348	578.5 to 591.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**

TOTAL COST FOR: N *side of* **BO TREE LN** *Starting at:* **EMILY WAY** **$130,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201209	BO TREE LN	MAJESTIC WAY	CRYSTAL WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76430	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
76431	3.8 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
76441	13.3 to 36.2 feet	Key Note Segment		5 ft	115			
76432	37.1 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
76426	38.2 to 39.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
76442	39.9 to 59.0 feet	Key Note Segment		5 ft	96			
76427	49.5 to 50.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
76433	61.0 to 66.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
76434	67.3 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
76435	81.9 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,380**
76443	99.9 to 119.6 feet	Key Note Segment		5 ft	99			
76436	120.7 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
76444	125.1 to 145.7 feet	Key Note Segment		5 ft	103			
76428	126.3 to 127.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76437	146.7 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
76438	147.8 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
76439	152.1 to 153.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
76429	155.2 to 156.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
76440	155.7 to 164.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**

TOTAL COST FOR: S *side of* **BO TREE LN** *Starting at:* **MAJESTIC WAY** **$39,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181624	BOLINAS WAY	IVY GLEN DR	ORCHARD HILL DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102222	0.0 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
102236	12.0 to 33.9 feet	Key Note Segment		5 ft	110			
102223	35.2 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102237	36.8 to 59.7 feet	Key Note Segment		5 ft	115			
102213	37.5 to 38.5 feet	**Vertical Change**	-.42"	5 ft	5	REF		
102224	60.0 to 66.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	34	SF	$40	**$1,340**
102214	60.2 to 61.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
102215	67.8 to 68.8 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
102216	85.4 to 86.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
102225	88.7 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
102226	96.3 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102238	99.3 to 122.7 feet	Key Note Segment		5 ft	117			
102227	122.7 to 125.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
102239	126.0 to 150.3 feet	Key Note Segment		5 ft	122			
102217	137.4 to 138.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
102228	152.7 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
102229	161.0 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102230	163.4 to 164.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
102231	168.4 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
102218	172.6 to 173.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
102232	177.3 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
102219	181.3 to 182.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
102240	186.6 to 209.1 feet	Key Note Segment		5 ft	113			
102233	211.0 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
102241	213.1 to 234.7 feet	Key Note Segment		5 ft	108			
102234	234.7 to 236.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
102235	240.9 to 248.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
102221	249.3 to 250.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181624	BOLINAS WAY	IVY GLEN DR	ORCHARD HILL DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **BOLINAS WAY**	*Starting at:* **IVY GLEN DR**						**$29,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161047	BOULDER AVE	BOULDER PL	DOUBLE TREE WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70362	0.0 to 2.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
70379	2.7 to 22.1 feet	Key Note Segment		5 ft	97			
70359	23.3 to 24.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
70363	23.8 to 33.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
70364	33.2 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
70365	34.9 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
70366	40.1 to 43.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
70367	43.6 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
70368	47.3 to 49.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
70369	58.7 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
70370	67.3 to 75.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
70360	74.4 to 75.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
70371	76.3 to 80.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
70372	101.2 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
70380	105.7 to 119.4 feet	Key Note Segment		5 ft	69			
70373	120.5 to 124.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
70381	126.4 to 139.9 feet	Key Note Segment		5 ft	68			
70374	139.9 to 144.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$980**
70375	151.1 to 152.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
70376	158.0 to 177.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
70361	176.2 to 177.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
70377	184.5 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70378	186.8 to 211.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**

TOTAL COST FOR: S *side of* **BOULDER AVE** *Starting at:* **BOULDER PL** **$60,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161055	BOULDER AVE	DOUBLE TREE WAY	SUBURBAN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70458	0.0 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
70446	3.1 to 4.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
70459	7.5 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
70460	22.2 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	299	SF	$120	**$35,820**
70447	41.1 to 42.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
70448	74.5 to 75.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
70461	82.6 to 88.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
70491	89.7 to 107.8 feet	Key Note Segment		5 ft	91			
70449	99.2 to 100.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
70462	111.8 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
70463	117.8 to 128.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,360**
70464	128.8 to 132.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
70465	132.3 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
70450	133.5 to 134.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
70451	147.7 to 148.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
70466	150.0 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
70467	164.3 to 168.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
70468	170.3 to 171.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
70469	171.5 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
70470	179.5 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
70492	182.6 to 201.7 feet	Key Note Segment		5 ft	96			
70452	183.2 to 184.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
70471	202.5 to 221.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	94	SF	$40	**$3,760**
70472	240.3 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
70453	240.5 to 241.5 feet	**Vertical Change**	-.45"	5 ft	5	REF		
70493	251.4 to 266.0 feet	Key Note Segment		5 ft	73			
70454	252.9 to 253.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
70473	267.4 to 269.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161055	BOULDER AVE	DOUBLE TREE WAY	SUBURBAN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70474	269.5 to 272.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
70475	276.1 to 289.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
70476	290.9 to 298.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,500**
70477	299.1 to 300.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
70478	301.6 to 307.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,780**
70479	312.3 to 322.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
70494	322.4 to 344.8 feet	Key Note Segment		5 ft	112			
70480	344.8 to 348.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
70481	348.8 to 350.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
70482	361.3 to 374.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
70495	374.7 to 398.0 feet	Key Note Segment		5 ft	117			
70483	398.0 to 401.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
70484	401.3 to 432.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
70496	432.8 to 455.8 feet	Key Note Segment		5 ft	115			
70485	456.3 to 457.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
70455	457.5 to 458.5 feet	**Vertical Change**	-.38"	5 ft	5	REF		
70486	460.1 to 463.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
70487	463.3 to 465.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
70488	468.3 to 469.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
70497	470.0 to 496.1 feet	Key Note Segment		5 ft	131			
70456	488.2 to 489.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
70489	502.3 to 505.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
70457	514.0 to 515.0 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
70490	517.3 to 520.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
70498	519.6 to 522.1 feet		6.0-7.0%	5 ft	13			

TOTAL COST FOR: N *side of* **BOULDER AVE** *Starting at:* **DOUBLE TREE WAY** **$148,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161051	BOULDER AVE	DOUBLE TREE WAY	DOUBLE TREE WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70404	0.0 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
70382	6.6 to 7.6 feet	**Vertical Change**	-.85"	5 ft	5	REF		
70383	10.0 to 11.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
70384	16.6 to 17.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
70385	20.0 to 21.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
70434	22.3 to 45.8 feet	Key Note Segment		5 ft	118			
70386	28.1 to 29.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
70405	47.9 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
70406	54.1 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
70435	60.8 to 84.7 feet	Key Note Segment		5 ft	120			
70387	86.2 to 87.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
70407	89.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
70408	103.1 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,520**
70409	127.3 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
70388	136.3 to 137.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
70436	139.1 to 159.1 feet	Key Note Segment		5 ft	100			
70389	151.3 to 152.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70410	164.2 to 173.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
70411	173.6 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
70390	173.8 to 174.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
70437	177.1 to 201.8 feet	Key Note Segment		5 ft	124			
70391	189.6 to 190.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
70412	203.3 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
70413	206.2 to 212.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,540**
70414	212.1 to 215.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
70415	216.0 to 219.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
70416	221.8 to 227.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
70417	228.3 to 235.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161051	BOULDER AVE	DOUBLE TREE WAY	DOUBLE TREE WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70418	235.8 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
70392	236.1 to 237.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
70393	243.9 to 244.9 feet	**Vertical Change**	3.16"	5 ft	5	REF		
70419	244.2 to 252.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
70394	249.8 to 250.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
70420	252.7 to 255.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
70395	255.3 to 256.3 feet	**Vertical Change**	3.48"	5 ft	5	SF	$75	**$375**
70438	255.4 to 275.6 feet	Key Note Segment		5 ft	101			
70396	257.0 to 258.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
70397	266.4 to 267.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
70421	277.6 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
70439	290.4 to 310.2 feet	Key Note Segment		5 ft	99			
70398	291.7 to 292.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
70399	312.5 to 313.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
70422	315.4 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70440	318.7 to 338.3 feet	Key Note Segment		5 ft	98			
70423	338.3 to 339.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
70424	340.3 to 341.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70425	361.1 to 362.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
70441	368.8 to 392.8 feet	Key Note Segment		5 ft	120			
70400	399.2 to 400.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
70426	402.7 to 403.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70427	406.3 to 417.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
70428	419.5 to 423.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
70429	426.3 to 430.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
70442	432.6 to 456.0 feet	Key Note Segment		5 ft	117			
70401	444.7 to 445.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
70430	457.4 to 460.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161051	BOULDER AVE	DOUBLE TREE WAY	DOUBLE TREE WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70431	460.4 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
70402	465.2 to 466.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
70443	491.4 to 515.1 feet	Key Note Segment		5 ft	119			
70432	515.6 to 528.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
70444	529.8 to 552.2 feet	Key Note Segment		5 ft	112			
70403	530.4 to 531.4 feet	**Vertical Change**	.53"	5 ft	5	REF		
70445	581.3 to 606.1 feet	Key Note Segment		5 ft	124			
70433	625.5 to 637.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: S / N *side of* **BOULDER AVE** *Starting at:* **DOUBLE TREE WAY** **$134,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161043	BOULDER AVE	SUBURBAN AVE	BOULDER PL	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70316	1.8 to 4.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
70317	4.9 to 6.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
70318	10.0 to 15.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
70319	15.7 to 17.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
70320	20.8 to 21.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
70321	21.8 to 23.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
70322	23.5 to 36.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,500**
70323	36.0 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,380**
70309	58.1 to 59.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
70334	58.3 to 75.3 feet	Key Note Segment		5 ft	85			
70310	67.4 to 68.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
70324	76.3 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
70325	83.5 to 115.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	160	SF	$120	**$19,200**
70311	103.5 to 104.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70326	115.5 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
70312	117.8 to 118.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
70335	122.3 to 130.9 feet	Key Note Segment		5 ft	43			
70327	130.9 to 147.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	83	SF	$40	**$3,300**
70328	148.2 to 166.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
70329	166.7 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	217	SF	$120	**$26,040**
70313	179.9 to 180.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
70314	205.8 to 206.8 feet	**Vertical Change**	.82"	5 ft	5	REF		
70330	210.8 to 218.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
70331	223.2 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
70315	224.2 to 227.6 feet	**Vertical Change**	.42"	5 ft	17	REF		
70332	233.9 to 235.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
70333	237.8 to 241.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: S *side of* **BOULDER AVE** *Starting at:* **SUBURBAN AVE** **$104,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161045	BOULDER PL	BOULDER AVE	BOULDER AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70344	0.8 to 3.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
70355	3.8 to 28.0 feet	Key Note Segment		5 ft	121			
70336	17.8 to 18.8 feet	**Vertical Change**	.49"	5 ft	5	REF		
70337	36.3 to 37.3 feet	**Vertical Change**	-.99"	5 ft	5	SF	$75	**$375**
70338	40.4 to 41.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
70345	48.4 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
70356	50.7 to 70.5 feet	Key Note Segment		5 ft	99			
70339	55.8 to 56.8 feet	**Vertical Change**	1.03"	5 ft	5	REF		
70346	73.5 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
70357	80.6 to 94.1 feet	Key Note Segment		5 ft	68			
70340	88.9 to 89.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
70347	94.5 to 95.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
70348	99.7 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
70358	110.8 to 133.8 feet	Key Note Segment		5 ft	115			
70341	124.0 to 125.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
70349	134.5 to 135.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
70342	134.8 to 135.8 feet	**Vertical Change**	.65"	5 ft	5	REF		
70350	139.1 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
70343	143.2 to 144.2 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
70351	152.8 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
70352	165.4 to 166.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
70353	167.3 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
70354	184.8 to 186.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **BOULDER PL** *Starting at:* **BOULDER AVE** **$16,605.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121121	BRIDGE WAY	ARDILLA DR	TRAIL WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60425	1.0 to 53.6 feet	Key Note Segment		5 ft	263			
60407	54.4 to 56.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	$420
60408	70.8 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
60409	81.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
60410	87.1 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
60411	90.2 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
60426	102.9 to 122.0 feet	Key Note Segment		5 ft	96			
60412	122.8 to 127.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
60427	128.3 to 149.2 feet	Key Note Segment		5 ft	104			
60401	148.5 to 149.5 feet	Vertical Change	.43"	5 ft	5	REF		
60413	149.5 to 154.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
60414	156.3 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
60415	163.8 to 184.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	$12,180
60416	186.4 to 202.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	$9,420
60428	202.1 to 222.8 feet	Key Note Segment		5 ft	104			
60402	203.2 to 204.2 feet	Vertical Change	-.39"	5 ft	5	REF		
60403	222.5 to 223.5 feet	Vertical Change	.29"	5 ft	5	REF		
60417	225.4 to 227.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
60418	227.5 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
60429	229.0 to 249.8 feet	Key Note Segment		5 ft	104			
60404	238.8 to 239.8 feet	Vertical Change	-.31"	5 ft	5	REF		
60419	250.3 to 252.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
60420	255.1 to 283.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	$16,740
60421	286.0 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	$10,680
60430	303.8 to 323.5 feet	Key Note Segment		5 ft	99			
60422	324.4 to 326.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	9	SF	$40	$360
60423	326.3 to 329.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
60431	329.1 to 349.6 feet	Key Note Segment		5 ft	103			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121121	BRIDGE WAY	ARDILLA DR	TRAIL WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60405	348.7 to 349.7 feet	Vertical Change	-.27"	5 ft	5	REF		
60424	351.4 to 368.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
60406	357.1 to 358.1 feet	Vertical Change	.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **BRIDGE WAY** *Starting at:* **ARDILLA DR** **$84,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121050	BRIDGE WAY	DOME AVE	ARDILLA DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60130	0.5 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
60115	0.9 to 1.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
60116	9.0 to 10.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
60131	9.3 to 10.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
60132	12.3 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
60159	13.9 to 41.9 feet	Key Note Segment		5 ft	140			
60117	14.8 to 15.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
60118	42.1 to 43.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
60133	43.1 to 45.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
60134	46.3 to 53.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
60135	53.8 to 57.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
60136	57.7 to 63.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
60160	64.3 to 93.1 feet	Key Note Segment		5 ft	144			
60137	94.0 to 100.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
60161	100.3 to 119.8 feet	Key Note Segment		5 ft	98			
60120	110.0 to 111.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
60138	121.0 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
60139	131.2 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
60140	147.4 to 161.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
60141	161.8 to 166.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
60162	166.7 to 196.7 feet	Key Note Segment		5 ft	150			
60142	197.5 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
60143	201.0 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
60163	203.3 to 233.3 feet	Key Note Segment		5 ft	150			
60121	233.2 to 234.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
60144	233.8 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
60145	239.3 to 254.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
60146	254.7 to 270.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121050	BRIDGE WAY	DOME AVE	ARDILLA DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60164	272.4 to 300.9 feet	Key Note Segment		5 ft	143			
60147	300.9 to 302.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$300
60148	302.4 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
60165	307.1 to 335.9 feet	Key Note Segment		5 ft	144			
60149	338.8 to 375.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	$22,080
60150	379.5 to 380.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
60166	380.9 to 437.1 feet	Key Note Segment		5 ft	281			
60122	410.0 to 411.0 feet	Vertical Change	.31"	5 ft	5	REF		
60151	437.1 to 439.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$400
60152	440.9 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
60123	455.4 to 456.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
60153	464.8 to 467.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
60124	475.9 to 476.9 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
60167	479.3 to 507.9 feet	Key Note Segment		5 ft	143			
60125	493.2 to 494.2 feet	Vertical Change	.33"	5 ft	5	REF		
60154	509.3 to 512.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$2,100
60168	513.3 to 540.2 feet	Key Note Segment		5 ft	135			
60155	540.3 to 547.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	37	SF	$40	$1,480
60156	559.6 to 587.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	$16,680
60169	589.7 to 610.7 feet	Key Note Segment		5 ft	105			
60170	615.8 to 638.1 feet	Key Note Segment		5 ft	112			
60127	633.0 to 634.0 feet	Vertical Change	.48"	5 ft	5	REF		
60128	643.2 to 644.2 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
60157	646.5 to 648.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
60158	650.7 to 664.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,340
60129	651.6 to 652.6 feet	Vertical Change	-.35"	5 ft	5	REF		
60171	662.3 to 664.7 feet		5.0-6.0%	5 ft	12			
60172	662.3 to 664.7 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	$1,440

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121050	BRIDGE WAY	DOME AVE	ARDILLA DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**W**	*side of* **BRIDGE WAY**	*Starting at:* **DOME AVE**					**$135,965.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108120944	BRIDGE WAY	TRAIL WAY	DOME AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59540	0.0 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,820**
59527	3.5 to 4.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
59528	10.7 to 11.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
59541	11.8 to 14.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
59542	16.5 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
59558	18.0 to 38.8 feet	Key Note Segment		5 ft	104			
59529	19.2 to 20.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
59543	39.9 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
59559	44.9 to 65.7 feet	Key Note Segment		5 ft	104			
59530	45.6 to 46.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
59531	65.1 to 66.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
59544	68.3 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
59545	80.8 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
59532	94.9 to 95.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
59546	96.2 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
59547	104.8 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
59533	107.4 to 108.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
59560	119.1 to 139.6 feet	Key Note Segment		5 ft	103			
59534	139.3 to 140.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
59548	139.9 to 146.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,380**
59561	146.8 to 166.8 feet	Key Note Segment		5 ft	100			
59549	167.1 to 177.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	54	SF	$40	**$2,140**
59550	177.8 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
59551	190.3 to 196.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
59552	196.2 to 205.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
59553	208.9 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
59562	220.4 to 240.4 feet	Key Note Segment		5 ft	100			
59554	243.0 to 246.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108120944	BRIDGE WAY	TRAIL WAY	DOME AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59563	246.3 to 266.3 feet	Key Note Segment		5 ft	100			
59555	267.4 to 281.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
59556	281.8 to 293.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
59536	300.9 to 301.9 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
59557	304.9 to 312.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
59537	305.1 to 306.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
59564	312.4 to 337.8 feet	Key Note Segment		5 ft	127			
59538	314.2 to 315.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
59539	337.9 to 338.9 feet	**Vertical Change**	3.52"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **BRIDGE WAY** *Starting at:* **TRAIL WAY** **$87,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071603	BRIQUEL AVE	CARMEN AVE	LA JOLLA WY	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125034	2.2 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
125035	30.6 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	192	SF	$120	**$23,100**
125032	60.0 to 61.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125033	71.0 to 72.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
125036	72.1 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
125037	76.9 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
125038	91.2 to 93.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
125039	93.1 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125040	98.0 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
125041	100.8 to 112.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
125042	114.8 to 152.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	188	SF	$120	**$22,560**
125043	153.8 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**

TOTAL COST FOR: E *side of* **BRIQUEL AVE** *Starting at:* **CARMEN AVE** **$85,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071239	BRIQUEL AVE	LA JOLLA CT	CARMEN AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123358	0.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
123359	8.6 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
123360	20.3 to 28.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
123361	31.0 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	152	SF	$120	**$18,180**
123362	61.4 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
123363	69.4 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
123364	96.7 to 117.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
123365	121.1 to 136.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
123357	129.1 to 130.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
123366	136.6 to 141.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
123367	142.5 to 159.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	87	SF	$120	**$10,380**
123368	160.4 to 163.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: W *side of* **BRIQUEL AVE** *Starting at:* **LA JOLLA CT** **$84,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171029	BUENA VENTURA CT	CAITLAN DR	CAITLAN DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88668	0.0 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
88654	14.5 to 15.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
88685	25.9 to 59.8 feet	Key Note Segment		5 ft	170			
88669	60.7 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
88686	66.9 to 96.6 feet	Key Note Segment		5 ft	148			
88670	97.3 to 133.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	179	SF	$40	**$7,160**
88687	134.6 to 164.8 feet	Key Note Segment		5 ft	151			
88656	154.9 to 155.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
88671	165.9 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
88657	168.8 to 169.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
88688	193.0 to 225.5 feet	Key Note Segment		5 ft	163			
88658	193.4 to 194.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
88659	225.5 to 226.5 feet	**Vertical Change**	.77"	5 ft	5	REF		
88672	228.7 to 230.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
88660	229.7 to 230.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
88673	230.9 to 234.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
88661	232.3 to 233.3 feet	**Vertical Change**	-.51"	5 ft	5	REF		
88662	234.9 to 235.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
88674	235.3 to 238.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
88675	238.5 to 240.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
88663	242.8 to 243.8 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
88689	243.5 to 274.4 feet	Key Note Segment		5 ft	154			
88664	249.3 to 250.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
88676	282.8 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
88690	284.4 to 315.0 feet	Key Note Segment		5 ft	153			
88665	304.8 to 305.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
88677	315.5 to 316.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
88678	326.9 to 341.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171029	BUENA VENTURA CT	CAITLAN DR	CAITLAN DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88666	330.4 to 331.4 feet	Vertical Change	-.41"	5 ft	5	REF		
88691	341.7 to 371.9 feet	Key Note Segment		5 ft	151			
88667	342.3 to 343.3 feet	Vertical Change	-.26"	5 ft	5	REF		
88679	374.8 to 384.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
88680	386.8 to 399.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
88681	402.3 to 406.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
88692	406.0 to 435.2 feet	Key Note Segment		5 ft	146			
88682	436.5 to 437.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
88683	441.6 to 444.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
88693	444.6 to 474.3 feet	Key Note Segment		5 ft	149			
88684	476.3 to 507.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	156	SF	$120	**$18,660**

TOTAL COST FOR: S/E/N *side of* **BUENA VENTURA CT** *Starting at:* **CAITLAN DR** **$84,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171031	CAITLAN DR	BUENA VENTURA CT	LOS OSOS CT	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88695	1.0 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,220**
88696	11.8 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
88697	17.5 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
88698	24.1 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
88699	34.2 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
88700	45.3 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
88701	51.6 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
88702	70.8 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
88703	79.8 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
88704	86.8 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
88705	95.0 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
88706	107.5 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
88707	129.6 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
88708	134.8 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
88709	150.9 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
88710	157.4 to 166.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**

TOTAL COST FOR: E *side of* **CAITLAN DR** *Starting at:* **BUENA VENTURA CT** **$56,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171048	CAITLAN DR	FIESTA DR	ISLA VISTA CT	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88839	0.1 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
88840	13.1 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
88841	16.8 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
88842	18.4 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
88858	29.3 to 53.2 feet	Key Note Segment		5 ft	120			
88843	53.3 to 55.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
88844	55.4 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88845	59.3 to 65.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
88846	68.0 to 71.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
88836	73.4 to 74.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
88847	73.4 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,340**
88837	88.0 to 89.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
88848	96.7 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
88849	101.4 to 108.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
88850	108.4 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
88851	115.3 to 117.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
88859	117.7 to 146.8 feet	Key Note Segment		5 ft	146			
88852	148.1 to 150.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
88853	151.4 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
88854	158.7 to 165.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
88860	166.4 to 188.3 feet	Key Note Segment		5 ft	110			
88838	174.3 to 175.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
88855	188.6 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
88856	192.5 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
88857	203.1 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**

TOTAL COST FOR: W *side of* **CAITLAN DR** *Starting at:* **FIESTA DR** **$75,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171024	CAITLAN DR	ISLA VISTA CT	BUENA VENTURA CT	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88640	1.7 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
88641	18.5 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88642	24.0 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
88636	24.2 to 25.2 feet	**Vertical Change**	-.49"	5 ft	5	REF		
88643	27.7 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**
88637	40.9 to 41.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
88638	50.3 to 51.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
88644	51.0 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
88645	58.8 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
88646	77.1 to 79.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
88647	81.0 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
88639	83.7 to 84.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
88648	92.1 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
88649	99.3 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
88650	114.7 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
88651	126.4 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
88652	132.3 to 133.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88653	134.3 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **CAITLAN DR** *Starting at:* **ISLA VISTA CT** **$59,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171052	CAITLAN DR	ISLA VISTA CT	886 ISLA VISTA CT	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88884	0.0 to 5.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
88885	9.0 to 10.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
88881	10.6 to 11.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
88886	11.8 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
88887	24.2 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88888	26.3 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
88890	30.9 to 53.3 feet	Key Note Segment		5 ft	112			
88882	32.2 to 33.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
88883	46.9 to 47.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
88889	53.4 to 61.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,580**

TOTAL COST FOR: W *side of* **CAITLAN DR** *Starting at:* **ISLA VISTA CT** **$12,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171038	CAITLAN DR	LOS OSOS CT	RIVERVIEW DR	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88762	4.4 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
88763	9.7 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
88757	10.9 to 11.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
88764	16.8 to 71.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	273	SF	$120	**$32,700**
88758	33.3 to 34.3 feet	**Vertical Change**	1.15"	5 ft	5	REF		
88760	60.3 to 61.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
88765	74.7 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88761	77.1 to 78.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
88766	78.4 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
88767	107.6 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
88768	113.3 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
88769	132.0 to 133.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88770	137.8 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
88771	144.7 to 151.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
88772	152.0 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
88773	175.0 to 193.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
88774	191.2 to 193.6 feet		5.0-6.0%	5 ft	12			
88775	191.2 to 193.6 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: E *side of* **CAITLAN DR** *Starting at:* **LOS OSOS CT** **$84,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171041	CAITLAN DR	RIVERVIEW DR	FIESTA DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88785	0.0 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
88786	14.3 to 19.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
88812	21.7 to 51.7 feet	Key Note Segment		5 ft	150			
88787	53.2 to 58.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
88788	58.4 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88789	62.1 to 67.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
88790	67.6 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88791	76.6 to 87.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
88792	87.5 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
88813	90.8 to 115.1 feet	Key Note Segment		5 ft	122			
88793	116.2 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
88794	120.9 to 125.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
88795	125.1 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
88814	132.3 to 156.0 feet	Key Note Segment		5 ft	118			
88777	132.6 to 133.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
88779	156.5 to 157.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
88796	157.7 to 162.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
88797	166.0 to 168.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
88798	168.3 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
88799	182.8 to 188.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
88800	192.9 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
88801	197.6 to 199.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
88815	199.3 to 224.7 feet	Key Note Segment		5 ft	127			
88780	211.2 to 212.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
88802	224.7 to 226.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
88803	226.9 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
88804	233.2 to 240.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
88805	240.6 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171041	CAITLAN DR	RIVERVIEW DR	FIESTA DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88806	247.4 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
88807	255.2 to 256.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88808	257.3 to 262.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
88816	263.0 to 292.7 feet	Key Note Segment		5 ft	149			
88781	277.8 to 278.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
88782	286.3 to 287.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
88809	292.7 to 302.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
88810	304.3 to 309.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
88783	304.7 to 305.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
88811	309.8 to 317.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
88784	317.3 to 318.3 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **CAITLAN DR** *Starting at:* **RIVERVIEW DR** **$80,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171016	CAITLAN DR	VIA DE ORO	ISLA VISTA CT	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88547	2.8 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
88548	12.1 to 18.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
88549	18.0 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
88542	24.8 to 25.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
88543	37.8 to 38.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
88550	37.8 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
88551	52.7 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
88552	55.2 to 57.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
88544	55.6 to 59.0 feet	**Vertical Change**	.5"	5 ft	17	REF		
88545	63.4 to 64.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
88553	71.9 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
88554	90.7 to 95.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
88555	98.7 to 107.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
88556	109.6 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
88557	113.8 to 117.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
88558	120.0 to 122.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
88559	125.5 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
88560	144.5 to 148.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
88561	149.5 to 160.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
88562	162.8 to 190.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,500**
88563	193.8 to 199.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
88564	199.7 to 201.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
88546	199.8 to 200.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
88565	201.7 to 208.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
88566	209.0 to 213.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: E *side of* **CAITLAN DR** *Starting at:* **VIA DE ORO** **$92,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112170940	CAITLAN DRIVE	SUNSET AVE	VIA SANTA BARBARA	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88193	0.8 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
88194	7.3 to 14.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
88195	16.4 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
88192	32.7 to 33.7 feet	**Vertical Change**	.63"	5 ft	5	REF		
88196	38.2 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
88197	52.3 to 54.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
88198	64.9 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**

TOTAL COST FOR: E *side of* **CAITLAN DRIVE** *Starting at:* **SUNSET AVE** **$29,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112170957	CAITLAN DRIVE	VIA CAPITOLA	VIA DE ORO	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88355	3.2 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
88351	11.3 to 12.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
88356	22.9 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
88352	23.5 to 24.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
88357	31.1 to 33.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
88358	33.5 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
88359	39.3 to 90.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	256	SF	$120	**$30,660**
88353	48.3 to 49.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
88354	61.4 to 62.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
88360	90.4 to 101.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	55	SF	$120	**$6,540**
88361	102.2 to 118.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
88362	118.8 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**

TOTAL COST FOR: E *side of* **CAITLAN DRIVE** *Starting at:* **VIA CAPITOLA** **$66,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112170947	CAITLAN DRIVE	VIA SANTA BARBARA	VIA CAPITOLA	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88272	0.3 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
88266	0.6 to 1.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
88273	6.8 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
88274	8.5 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
88267	26.3 to 27.3 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
88275	27.9 to 30.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
88276	30.5 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
88268	39.2 to 40.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
88277	44.8 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
88269	52.2 to 53.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
88278	54.7 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88279	58.5 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
88280	67.9 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88281	74.8 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
88282	82.2 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
88283	111.4 to 134.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
88270	132.9 to 133.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
88271	137.1 to 138.1 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
88284	150.3 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
88285	150.3 to 152.8 feet		5.0-6.0%	5 ft	13			
88286	150.3 to 152.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **CAITLAN DRIVE** *Starting at:* **VIA SANTA BARBARA** **$67,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161048	CAMBRIA AVE	KENT DR	402 KENT DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85498	2.3 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
85499	5.3 to 17.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
85496	15.1 to 16.1 feet	**Vertical Change**	.53"	5 ft	5	REF		
85500	20.4 to 28.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
85501	30.6 to 33.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
85502	36.0 to 64.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,160**
85503	67.0 to 69.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
85504	70.3 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
85505	76.8 to 82.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
85497	77.3 to 78.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
85506	82.4 to 83.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
85507	86.6 to 87.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
85508	87.6 to 93.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	**$3,780**
85509	96.3 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
85510	103.5 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
85511	107.4 to 108.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: N *side of* **CAMBRIA AVE** *Starting at:* **KENT DR** **$48,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161056	CAMBRIA AVE	STREET END	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85539	2.4 to 4.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	11	SF	$120	**$1,260**
85512	4.3 to 5.3 feet	**Vertical Change**	1.23"	5 ft	5	REF		
85540	9.8 to 11.6 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	9	SF	$120	**$1,080**
85541	13.8 to 15.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	10	SF	$120	**$1,200**
85542	17.4 to 18.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
85543	19.3 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
85513	21.4 to 22.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
85514	25.5 to 26.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
85544	25.8 to 28.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
85545	28.9 to 32.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
85546	35.4 to 38.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
85547	41.4 to 44.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
85594	44.3 to 66.0 feet	Key Note Segment		5 ft	109			
85515	55.1 to 56.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
85516	65.8 to 66.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
85548	68.9 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
85549	80.0 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
85550	89.3 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
85595	91.2 to 120.1 feet	Key Note Segment		5 ft	145			
85517	109.7 to 110.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
85551	120.8 to 122.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
85552	124.6 to 125.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
85553	128.5 to 138.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
85554	140.5 to 147.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
85555	148.5 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
85596	150.8 to 172.8 feet	Key Note Segment		5 ft	110			
85556	175.8 to 176.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
85557	179.2 to 180.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161056	CAMBRIA AVE	STREET END	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85558	184.0 to 196.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
85597	197.6 to 226.5 feet	Key Note Segment		5 ft	145			
85519	225.4 to 226.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
85559	226.5 to 231.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	26	SF	$40	**$1,020**
85598	231.6 to 257.3 feet	Key Note Segment		5 ft	129			
85560	257.6 to 258.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
85561	258.7 to 264.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
85562	264.6 to 275.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
85563	280.4 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
85564	290.1 to 295.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
85565	295.3 to 296.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85566	298.8 to 304.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
85599	304.6 to 332.4 feet	Key Note Segment		5 ft	139			
85520	322.7 to 323.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
85567	333.7 to 359.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,540**
85568	362.3 to 364.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
85600	364.0 to 386.3 feet	Key Note Segment		5 ft	112			
85569	387.3 to 403.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
85570	406.1 to 410.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
85601	410.8 to 440.6 feet	Key Note Segment		5 ft	149			
85571	441.8 to 442.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
85572	444.6 to 447.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
85573	448.8 to 463.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
85602	465.3 to 493.8 feet	Key Note Segment		5 ft	143			
85574	495.6 to 499.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
85575	499.9 to 517.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
85603	517.5 to 547.3 feet	Key Note Segment		5 ft	149			
85576	550.2 to 553.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161056	CAMBRIA AVE	STREET END	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85604	554.1 to 575.0 feet	Key Note Segment		5 ft	105			
85521	555.2 to 556.2 feet	Vertical Change	.28"	5 ft	5	REF		
85577	576.0 to 577.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
85578	577.9 to 587.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	$5,520
85579	587.1 to 588.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
85580	591.4 to 624.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	168	SF	$120	$20,100
85523	615.5 to 616.5 feet	Vertical Change	.41"	5 ft	5	REF		
85605	624.9 to 655.6 feet	Key Note Segment		5 ft	154			
85525	658.4 to 659.4 feet	Vertical Change	.27"	5 ft	5	REF		
85581	659.0 to 661.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
85606	661.2 to 681.6 feet	Key Note Segment		5 ft	102			
85526	681.7 to 682.7 feet	Vertical Change	.39"	5 ft	5	REF		
85582	684.6 to 686.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
85583	687.8 to 691.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,340
85527	691.7 to 692.7 feet	Vertical Change	.46"	5 ft	5	REF		
85584	693.1 to 699.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020
85585	702.3 to 707.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,820
85586	712.4 to 728.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	$9,780
85528	716.8 to 717.8 feet	Vertical Change	.27"	5 ft	5	REF		
85529	729.3 to 730.3 feet	Vertical Change	.51"	5 ft	5	REF		
85587	729.6 to 732.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
85588	734.8 to 739.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
85607	740.0 to 759.3 feet	Key Note Segment		5 ft	97			
85589	761.1 to 767.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,780
85530	765.7 to 766.7 feet	Vertical Change	.44"	5 ft	5	REF		
85608	767.9 to 797.0 feet	Key Note Segment		5 ft	146			
85531	768.7 to 769.7 feet	Vertical Change	-.61"	5 ft	5	REF		
85532	778.3 to 781.0 feet	Vertical Change	.35"	5 ft	14	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161056	CAMBRIA AVE	STREET END	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85533	787.3 to 788.3 feet	Vertical Change	.41"	5 ft	5	REF		
85534	791.1 to 792.1 feet	Vertical Change	.36"	5 ft	5	REF		
85590	798.1 to 803.0 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	25	SF	$120	**$2,940**
85609	798.5 to 800.2 feet		5.0-6.0%	5 ft	9			
85535	798.9 to 799.9 feet	Vertical Change	-.35"	5 ft	5	REF		
85536	803.4 to 806.6 feet	Vertical Change	.33"	5 ft	16	LF	$75	**$1,200**
85591	807.3 to 808.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
85537	807.8 to 808.8 feet	Vertical Change	1.04"	5 ft	5	REF		
85592	809.1 to 810.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
85593	810.3 to 823.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,860**
85538	818.0 to 819.0 feet	Vertical Change	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **CAMBRIA AVE** *Starting at:* **STREET END** **$189,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161057	CAMBRIA AVE	WESTBERRY BVD	ZAK WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85611	0.0 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
85612	9.2 to 17.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
85613	19.4 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
85614	21.8 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
85615	27.8 to 34.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
85616	36.5 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
85610	49.8 to 50.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
85617	49.8 to 73.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
85618	70.8 to 73.6 feet		6.0-7.0%	5 ft	14			
85619	70.8 to 73.6 feet	Running Slope	6.0-7.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **CAMBRIA AVE** *Starting at:* **WESTBERRY BVD** **$37,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161101	CAMBRIA AVE	ZAK WAY	KENT DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85627	0.5 to 11.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
85628	11.7 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,600**
85660	45.3 to 67.0 feet	Key Note Segment		5 ft	109			
85620	57.1 to 58.1 feet	**Vertical Change**	.63"	5 ft	5	REF		
85629	68.4 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,940**
85630	78.6 to 81.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
85631	82.2 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
85632	89.6 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
85633	96.6 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
85634	102.8 to 120.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
85635	122.3 to 126.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
85661	127.8 to 148.3 feet	Key Note Segment		5 ft	103			
85621	138.3 to 139.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
85636	151.2 to 154.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
85662	154.8 to 183.5 feet	Key Note Segment		5 ft	143			
85622	173.3 to 174.3 feet	**Vertical Change**	.58"	5 ft	5	REF		
85623	183.7 to 184.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
85637	184.5 to 188.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
85638	193.8 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
85639	204.9 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
85640	209.9 to 224.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
85641	229.2 to 231.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
85663	233.9 to 253.9 feet	Key Note Segment		5 ft	100			
85642	254.8 to 262.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
85664	262.3 to 292.1 feet	Key Note Segment		5 ft	149			
85643	293.3 to 297.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
85644	297.8 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
85645	301.4 to 306.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161101	CAMBRIA AVE	ZAK WAY	KENT DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85646	306.7 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85647	312.8 to 316.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
85665	319.3 to 340.2 feet	Key Note Segment		5 ft	105			
85624	321.6 to 322.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
85648	341.2 to 346.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
85649	348.2 to 365.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
85650	367.3 to 368.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85651	370.5 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85666	375.8 to 398.1 feet	Key Note Segment		5 ft	112			
85652	402.6 to 417.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
85653	419.9 to 422.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
85667	426.7 to 448.2 feet	Key Note Segment		5 ft	108			
85654	448.8 to 450.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85655	452.4 to 456.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
85656	457.1 to 458.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
85657	461.3 to 465.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
85658	465.8 to 472.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
85625	474.7 to 475.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
85668	476.6 to 498.8 feet	Key Note Segment		5 ft	111			
85659	506.3 to 518.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
85669	517.8 to 518.9 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: N *side of* **CAMBRIA AVE** *Starting at:* **ZAK WAY** **$131,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108101435	CANAL ST	ADELAIDE AVE	LILLY ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56878	1.0 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
56879	32.0 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
56880	47.6 to 63.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
56881	63.1 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
56882	88.4 to 91.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
56883	93.2 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56869	93.6 to 94.6 feet	**Vertical Change**	.67"	5 ft	5	REF		
56884	97.6 to 121.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
56870	121.8 to 122.8 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
56885	123.9 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,240**
56871	134.6 to 135.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
56886	149.4 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
56887	155.6 to 170.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
56888	172.6 to 188.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
56872	172.9 to 173.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
56873	186.0 to 187.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
56889	191.9 to 195.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
56890	197.9 to 213.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
56874	198.8 to 199.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
56875	211.7 to 212.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
56891	213.1 to 241.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	144	SF	$120	**$17,280**
56892	242.6 to 252.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
56893	255.0 to 285.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	**$18,300**
56876	262.6 to 263.6 feet	**Vertical Change**	-.58"	5 ft	5	REF		
56877	288.0 to 289.0 feet	**Vertical Change**	-.64"	5 ft	5	REF		
56894	288.8 to 293.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
56895	296.8 to 297.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
56896	299.3 to 306.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108101435	CANAL ST	ADELAIDE AVE	LILLY ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **CANAL ST**	*Starting at:* **ADELAIDE AVE**					**$161,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121252	CANAL ST	ADELAIDE AVE	LILLY ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60569	13.2 to 14.2 feet	Vertical Change	-.32"	6 ft	6	LF	$75	$450
60599	26.3 to 29.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	$2,088
60570	31.0 to 32.0 feet	Vertical Change	-.35"	6 ft	6	LF	$75	$450
60600	35.4 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	178	SF	$120	$21,384
60571	44.4 to 45.4 feet	Vertical Change	.45"	6 ft	6	REF		
60572	48.6 to 49.6 feet	Vertical Change	.36"	6 ft	6	REF		
60573	60.8 to 61.8 feet	Vertical Change	.33"	6 ft	6	REF		
60574	64.8 to 65.8 feet	Vertical Change	.31"	6 ft	6	REF		
60601	67.3 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	$2,088
60575	68.9 to 69.9 feet	Vertical Change	.47"	6 ft	6	REF		
60602	72.2 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	132	SF	$120	$15,840
60576	72.9 to 73.9 feet	Vertical Change	-.28"	6 ft	6	REF		
60577	81.0 to 82.0 feet	Vertical Change	.37"	6 ft	6	REF		
60578	85.2 to 86.2 feet	Vertical Change	.37"	6 ft	6	REF		
60579	93.4 to 94.4 feet	Vertical Change	-.39"	6 ft	6	REF		
60603	105.8 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	$2,304
60580	110.9 to 111.9 feet	Vertical Change	-.39"	6 ft	6	LF	$75	$450
60604	114.6 to 116.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	$1,440
60581	119.8 to 120.8 feet	Vertical Change	.53"	6 ft	6	SF	$75	$450
60582	128.6 to 129.6 feet	Vertical Change	.5"	6 ft	6	REF		
60605	128.7 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	$5,688
60583	137.3 to 138.3 feet	Vertical Change	-.26"	6 ft	6	LF	$75	$450
60606	139.3 to 143.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	$3,024
60584	145.7 to 146.7 feet	Vertical Change	-.39"	6 ft	6	LF	$75	$450
60585	149.8 to 150.8 feet	Vertical Change	.28"	6 ft	6	LF	$75	$450
60607	157.2 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	$7,560
60586	157.7 to 158.7 feet	Vertical Change	-.36"	6 ft	6	REF		
60587	161.8 to 162.8 feet	Vertical Change	.39"	6 ft	6	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121252	CANAL ST	ADELAIDE AVE	LILLY ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60588	178.5 to 179.5 feet	Vertical Change	.3"	6 ft	6	LF	$75	$450
60608	181.6 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	$5,184
60589	204.9 to 205.9 feet	Vertical Change	.37"	6 ft	6	LF	$75	$450
60590	209.2 to 210.2 feet	Vertical Change	.29"	6 ft	6	LF	$75	$450
60591	213.6 to 214.6 feet	Vertical Change	-.27"	6 ft	6	LF	$75	$450
60609	224.2 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	$5,832
60610	238.1 to 244.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	40	SF	$120	$4,824
60592	242.7 to 243.7 feet	Vertical Change	.39"	6 ft	6	REF		
60611	244.8 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	$2,736
60593	246.6 to 247.6 feet	Vertical Change	-.26"	6 ft	6	REF		
60594	254.9 to 255.9 feet	Vertical Change	.38"	6 ft	6	LF	$75	$450
60595	259.2 to 260.2 feet	Vertical Change	.48"	6 ft	6	LF	$75	$450
60596	263.7 to 264.7 feet	Vertical Change	.39"	6 ft	6	LF	$75	$450
60612	269.6 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	$2,592
60597	272.6 to 273.6 feet	Vertical Change	.41"	6 ft	6	REF		
60598	281.3 to 282.3 feet	Vertical Change	-.28"	6 ft	6	LF	$75	$450
60613	297.5 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	$1,656

TOTAL COST FOR: S *side of* **CANAL ST** *Starting at:* **ADELAIDE AVE** **$90,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108101432	CANAL ST	CANAL ST	ADELAIDE AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56864	3.3 to 4.3 feet	Vertical Change	.4"	6 ft	6	LF	$75	**$450**
56868	5.3 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	55	SF	$120	**$6,624**
56865	7.9 to 8.9 feet	Vertical Change	.31"	6 ft	6	REF		
56866	13.9 to 14.9 feet	Vertical Change	-.3"	6 ft	6	REF		
56867	22.1 to 23.1 feet	Vertical Change	-.26"	6 ft	6	LF	$75	**$450**

TOTAL COST FOR: E *side of* **CANAL ST** *Starting at:* **CANAL ST** **$7,524.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108101344	CANAL ST	CANAL ST	ADELAIDE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56425	10.4 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
56424	33.3 to 34.3 feet	**Vertical Change**	-.46"	6 ft	6	LF	$75	**$450**
56426	41.9 to 43.0 feet		5.0-6.0%	6 ft	7			

TOTAL COST FOR: W *side of* **CANAL ST** *Starting at:* **CANAL ST** **$2,682.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108101436	CANAL ST	CANAL ST	LILLY ST	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56897	0.6 to 1.6 feet	Vertical Change	-.31"	5 ft	5	LF	$75	**$375**
56900	8.7 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56899	36.8 to 37.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **CANAL ST** *Starting at:* **CANAL ST** **$1,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101547	CANAL ST	LILLY ST	VINEYARD AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57429	0.0 to 15.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
57452	15.4 to 32.8 feet	Key Note Segment		5 ft	87			
57430	49.1 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
57431	84.6 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
57453	92.3 to 107.9 feet	Key Note Segment		5 ft	78			
57432	108.0 to 109.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
57433	145.0 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
57434	168.3 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
57435	196.6 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
57415	225.4 to 226.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
57454	256.4 to 271.8 feet	Key Note Segment		5 ft	77			
57436	280.8 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
57455	289.1 to 305.3 feet	Key Note Segment		5 ft	81			
57437	336.3 to 343.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
57438	343.1 to 348.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
57439	350.8 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
57456	361.4 to 388.1 feet	Key Note Segment		5 ft	134			
57416	361.6 to 362.6 feet	Vertical Change	-.26"	5 ft	5	REF		
57440	389.6 to 392.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
57441	400.8 to 415.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
57417	407.3 to 408.3 feet	Vertical Change	.42"	5 ft	5	REF		
57418	411.3 to 412.3 feet	Vertical Change	.38"	5 ft	5	REF		
57457	416.0 to 426.3 feet	Key Note Segment		5 ft	52			
57419	417.1 to 418.1 feet	Vertical Change	.33"	5 ft	5	REF		
57442	426.3 to 434.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	39	SF	$40	**$1,560**
57443	435.2 to 443.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
57444	445.2 to 452.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
57420	448.6 to 449.6 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101547	CANAL ST	LILLY ST	VINEYARD AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57421	451.8 to 452.8 feet	Vertical Change	-.37"	5 ft	5	REF		
57422	454.9 to 455.9 feet	Vertical Change	.29"	5 ft	5	REF		
57445	455.2 to 478.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,220**
57423	463.2 to 464.2 feet	Vertical Change	.36"	5 ft	5	REF		
57424	465.5 to 468.2 feet	Vertical Change	-.26"	5 ft	14	REF		
57446	482.4 to 486.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
57425	490.2 to 491.2 feet	Vertical Change	.27"	5 ft	5	REF		
57447	490.8 to 493.8 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	15	SF	$120	**$1,800**
57448	495.1 to 501.3 feet	Cross Slope (PAR)	>15.0%	5 ft	31	SF	$120	**$3,720**
57426	495.4 to 496.4 feet	Vertical Change	.85"	5 ft	5	REF		
57427	500.3 to 501.3 feet	Vertical Change	-.49"	5 ft	5	REF		
57459	500.9 to 502.3 feet		>15.0%	5 ft	7			
57458	503.6 to 512.7 feet	Key Note Segment		5 ft	46			
57449	512.7 to 517.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	**$1,020**
57450	520.3 to 533.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
57451	533.3 to 536.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: N *side of* **CANAL ST** *Starting at:* **LILLY ST** **$119,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108101343	CANAL ST	VINEYARD AVE	ADELAIDE AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56415	0.0 to 13.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
56409	5.4 to 6.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
56410	12.6 to 13.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
56416	17.6 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
56417	26.3 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
56411	27.1 to 28.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
56418	35.8 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
56419	57.3 to 68.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
56420	68.3 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
56421	73.8 to 114.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	203	SF	$120	**$24,360**
56412	91.8 to 92.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
56413	105.5 to 106.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56422	116.6 to 119.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
56423	120.8 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
56414	122.7 to 123.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **CANAL ST** *Starting at:* **VINEYARD AVE** **$68,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121245	CANAL ST	VINEYARD AVE	ADELAIDE AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60564	0.0 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	68	SF	$120	**$8,208**
60565	17.7 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,608**
60554	29.4 to 30.4 feet	**Vertical Change**	.31"	6 ft	6	LF	$75	**$450**
60555	38.2 to 39.2 feet	**Vertical Change**	.31"	6 ft	6	LF	$75	**$450**
60556	42.4 to 43.4 feet	**Vertical Change**	-.67"	6 ft	6	SF	$75	**$450**
60557	46.6 to 47.6 feet	**Vertical Change**	.55"	6 ft	6	REF		
60566	47.4 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
60558	75.7 to 76.7 feet	**Vertical Change**	.52"	6 ft	6	SF	$75	**$450**
60560	84.3 to 85.3 feet	**Vertical Change**	.27"	6 ft	6	LF	$75	**$450**
60567	90.5 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	50	SF	$120	**$5,976**
60561	93.1 to 94.1 feet	**Vertical Change**	.41"	6 ft	6	REF		
60562	97.4 to 98.4 feet	**Vertical Change**	.49"	6 ft	6	REF		
60563	105.3 to 106.3 feet	**Vertical Change**	-.35"	6 ft	6	LF	$75	**$450**
60568	108.6 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,416**

TOTAL COST FOR: S *side of* **CANAL ST** *Starting at:* **VINEYARD AVE** **$30,204.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111436	CAPISTRANO DR	ANGEL FALLS CT	S TIMBERLINE DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92654	1.3 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
92644	5.6 to 6.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92655	11.8 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
92656	13.3 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
92657	22.9 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
92645	23.9 to 24.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
92646	41.2 to 42.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
92658	66.0 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
92659	73.7 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
92647	75.0 to 76.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
92660	80.5 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
92661	86.7 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
92662	95.4 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
92648	115.8 to 116.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
92649	118.0 to 119.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
92663	118.8 to 120.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92664	133.1 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92665	138.5 to 141.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
92651	143.5 to 144.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
92666	148.4 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
92652	153.2 to 154.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
92667	155.0 to 159.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
92653	164.0 to 165.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92668	164.7 to 167.0 feet		5.0-6.0%	5 ft	12			
92669	164.7 to 167.0 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: N *side of* **CAPISTRANO DR** *Starting at:* **ANGEL FALLS CT** **$26,370.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111441	CAPISTRANO DR	S TIMBERLINE DR	S WOLFTRAP ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92690	0.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
92691	3.3 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
92670	8.9 to 9.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
92737	17.1 to 35.4 feet	Key Note Segment		5 ft	91			
92671	26.4 to 27.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
92692	35.4 to 40.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
92738	42.9 to 61.3 feet	Key Note Segment		5 ft	92			
92672	63.0 to 64.0 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
92693	72.5 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
92694	78.9 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
92695	88.0 to 95.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
92673	88.2 to 89.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
92674	97.0 to 98.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
92696	101.1 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
92739	106.1 to 125.3 feet	Key Note Segment		5 ft	96			
92675	108.4 to 109.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
92676	122.0 to 123.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
92697	127.1 to 129.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
92740	131.0 to 150.7 feet	Key Note Segment		5 ft	98			
92677	141.2 to 142.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
92698	155.1 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92699	159.3 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
92700	165.8 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92701	173.4 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
92702	181.7 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
92678	182.0 to 183.0 feet	**Vertical Change**	-.4"	5 ft	5	REF		
92703	188.8 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
92704	196.1 to 200.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111441	CAPISTRANO DR	S TIMBERLINE DR	S WOLFTRAP ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92741	200.7 to 218.9 feet	Key Note Segment		5 ft	91			
92679	220.3 to 221.3 feet	Vertical Change	.31"	5 ft	5	REF		
92705	220.4 to 223.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
92742	226.0 to 244.3 feet	Key Note Segment		5 ft	92			
92680	235.1 to 236.1 feet	Vertical Change	.29"	5 ft	5	REF		
92706	245.4 to 248.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
92707	250.8 to 270.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
92681	251.9 to 252.9 feet	Vertical Change	.31"	5 ft	5	REF		
92708	270.4 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
92709	277.8 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
92710	287.0 to 290.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
92743	296.6 to 315.3 feet	Key Note Segment		5 ft	93			
92711	316.5 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
92744	322.4 to 341.1 feet	Key Note Segment		5 ft	94			
92712	343.7 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
92713	350.8 to 352.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
92714	354.0 to 368.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
92715	371.0 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
92716	374.4 to 383.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
92717	390.1 to 394.3 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	21	SF	$120	**$2,520**
92682	394.6 to 395.6 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
92718	396.4 to 401.5 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	26	SF	$120	**$3,060**
92719	406.0 to 411.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
92745	411.6 to 430.3 feet	Key Note Segment		5 ft	94			
92720	430.9 to 437.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
92721	444.8 to 449.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
92683	445.7 to 446.7 feet	Vertical Change	.33"	5 ft	5	REF		
92722	453.5 to 476.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111441	CAPISTRANO DR	S TIMBERLINE DR	S WOLFTRAP ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92746	482.2 to 500.4 feet	Key Note Segment		5 ft	91			
92685	498.1 to 499.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
92723	502.2 to 508.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
92724	512.3 to 514.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
92725	514.2 to 519.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
92726	522.0 to 523.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92727	525.8 to 527.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92747	527.2 to 546.8 feet	Key Note Segment		5 ft	98			
92728	549.3 to 553.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92748	553.2 to 571.9 feet	Key Note Segment		5 ft	93			
92687	569.8 to 570.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
92729	577.8 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92688	580.8 to 581.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92730	582.0 to 583.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
92731	584.9 to 589.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
92732	593.0 to 607.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
92689	608.1 to 609.1 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
92733	611.3 to 615.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
92749	616.4 to 634.8 feet	Key Note Segment		5 ft	92			
92734	636.8 to 641.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
92750	641.9 to 660.3 feet	Key Note Segment		5 ft	92			
92735	663.3 to 664.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92736	668.8 to 681.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**

TOTAL COST FOR: S *side of* **CAPISTRANO DR** *Starting at:* **S TIMBERLINE DR** **$145,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111431	CAPISTRANO DR	S WOLFTRAP ST	ANGEL FALLS CT	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92572	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
92573	11.1 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
92574	34.3 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
92575	55.6 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
92576	70.4 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
92560	76.0 to 77.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
92561	84.8 to 85.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
92562	90.0 to 91.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
92577	91.0 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92563	91.9 to 92.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
92598	93.2 to 113.3 feet	Key Note Segment		5 ft	101			
92578	114.3 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
92599	119.5 to 137.8 feet	Key Note Segment		5 ft	92			
92579	140.3 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
92580	153.8 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
92581	159.4 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
92582	170.4 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92600	182.6 to 202.0 feet	Key Note Segment		5 ft	97			
92583	203.3 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
92601	209.1 to 227.8 feet	Key Note Segment		5 ft	94			
92565	218.4 to 219.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
92584	232.3 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92585	238.9 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
92586	249.2 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92587	267.8 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
92602	272.7 to 291.8 feet	Key Note Segment		5 ft	96			
92566	282.1 to 283.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92588	296.2 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111431	CAPISTRANO DR	S WOLFTRAP ST	ANGEL FALLS CT	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92603	297.8 to 316.4 feet	Key Note Segment		5 ft	93			
92567	307.1 to 308.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
92589	326.7 to 328.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
92590	332.2 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
92591	339.0 to 344.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
92592	347.1 to 359.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
92568	353.8 to 354.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
92593	364.8 to 381.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
92569	371.3 to 372.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
92594	385.6 to 392.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
92595	400.3 to 408.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
92596	414.1 to 431.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
92570	414.2 to 415.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
92597	434.9 to 438.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92604	435.8 to 438.9 feet		5.0-6.0%	5 ft	16			
92605	435.8 to 438.9 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: N *side of* **CAPISTRANO DR** *Starting at:* **S WOLFTRAP ST** **$102,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131014	CARMEL ST	FRITZ ST	SOLANO ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61521	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
61538	6.3 to 28.8 feet	Key Note Segment		5 ft	113			
61522	29.0 to 33.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
61539	35.6 to 58.4 feet	Key Note Segment		5 ft	114			
61523	63.9 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61515	72.1 to 73.1 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
61524	77.9 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,060**
61516	83.2 to 84.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
61525	103.0 to 106.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
61517	107.3 to 108.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
61526	107.5 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
61540	118.9 to 140.8 feet	Key Note Segment		5 ft	110			
61527	140.9 to 154.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	66	SF	$40	**$2,640**
61528	156.3 to 169.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
61541	169.1 to 191.2 feet	Key Note Segment		5 ft	111			
61529	192.1 to 195.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
61542	195.3 to 217.0 feet	Key Note Segment		5 ft	109			
61530	218.3 to 224.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
61531	225.1 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
61532	234.4 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
61518	245.4 to 246.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
61533	248.7 to 254.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
61534	254.8 to 270.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
61543	270.9 to 292.7 feet	Key Note Segment		5 ft	109			
61519	281.9 to 282.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
61535	293.3 to 295.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
61544	296.3 to 318.5 feet	Key Note Segment		5 ft	111			
61520	307.7 to 308.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131014	CARMEL ST	FRITZ ST	SOLANO ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61536	319.1 to 320.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
61537	321.5 to 326.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: N *side of* **CARMEL ST** *Starting at:* **FRITZ ST** **$73,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131019	CARMEL ST	SOLANO ST	FRITZ ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61547	0.3 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
61548	5.0 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
61549	7.0 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
61560	18.2 to 37.4 feet	Key Note Segment		5 ft	96			
61561	44.5 to 63.7 feet	Key Note Segment		5 ft	96			
61550	68.5 to 73.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
61551	73.4 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
61552	83.4 to 89.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
61553	94.5 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
61562	121.9 to 143.7 feet	Key Note Segment		5 ft	109			
61554	144.3 to 146.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	**$480**
61563	148.4 to 169.4 feet	Key Note Segment		5 ft	105			
61555	174.0 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
61556	183.6 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
61564	200.3 to 221.5 feet	Key Note Segment		5 ft	106			
61545	211.4 to 212.4 feet	Vertical Change	.54"	5 ft	5	REF		
61557	223.5 to 224.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
61558	224.9 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
61546	229.0 to 230.0 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
61559	232.6 to 240.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
61565	241.1 to 242.1 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **CARMEL ST** *Starting at:* **SOLANO ST** **$53,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071601	CARMEN AVE	1420 CARMEN AVE	BRIQUEL AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124995	0.1 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
125021	4.8 to 20.9 feet	Key Note Segment		5 ft	81			
124982	5.4 to 6.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
124983	21.4 to 22.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
124996	22.0 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
124997	30.8 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125022	41.6 to 54.9 feet	Key Note Segment		5 ft	67			
124998	54.9 to 57.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
124984	55.6 to 56.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
125023	68.2 to 81.9 feet	Key Note Segment		5 ft	69			
124999	81.9 to 85.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$680**
124985	85.9 to 86.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
125000	86.0 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
124986	90.7 to 91.7 feet	**Vertical Change**	.67"	5 ft	5	REF		
125001	91.0 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
125002	95.4 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
124987	96.1 to 97.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
124988	106.5 to 107.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
125003	109.5 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
124989	114.1 to 115.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
124990	121.1 to 122.1 feet	**Vertical Change**	-.42"	5 ft	5	REF		
125004	126.5 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
125024	139.8 to 153.9 feet	Key Note Segment		5 ft	70			
124991	144.9 to 145.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
125005	154.3 to 157.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$540**
125006	161.3 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
125007	181.7 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
125025	192.1 to 206.5 feet	Key Note Segment		5 ft	72			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071601	CARMEN AVE	1420 CARMEN AVE	BRIQUEL AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125008	206.5 to 214.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	$1,640
125026	218.2 to 231.6 feet	Key Note Segment		5 ft	67			
125009	231.6 to 234.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
125010	238.1 to 240.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
125011	244.8 to 282.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	$22,740
125012	288.0 to 291.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
125027	295.8 to 309.2 feet	Key Note Segment		5 ft	67			
125013	309.2 to 330.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	105	SF	$40	$4,180
125031	316.5 to 317.5 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
125028	346.8 to 360.5 feet	Key Note Segment		5 ft	69			
124992	352.0 to 353.0 feet	Vertical Change	-.62"	5 ft	5	REF		
125014	360.5 to 361.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$280
124993	363.6 to 364.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
125015	368.3 to 370.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
125029	372.8 to 386.3 feet	Key Note Segment		5 ft	68			
125016	390.6 to 404.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
124994	407.2 to 408.2 feet	Vertical Change	.42"	5 ft	5	REF		
125017	407.9 to 417.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
125018	420.7 to 422.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
125030	425.2 to 438.1 feet	Key Note Segment		5 ft	65			
125019	439.0 to 440.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
125020	447.4 to 455.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620

TOTAL COST FOR: N *side of* **CARMEN AVE** *Starting at:* **1420 CARMEN AVE** **$90,369.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071556	CARMEN AVE	ANNA AVE	1420 CARMEN AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124962	0.0 to 19.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,460**
124963	20.8 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
124977	25.6 to 38.6 feet	Key Note Segment		5 ft	65			
124964	38.6 to 48.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
124949	39.6 to 40.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
124978	50.8 to 65.2 feet	Key Note Segment		5 ft	72			
124950	51.7 to 52.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
124965	65.3 to 68.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
124966	71.2 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
124967	75.8 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
124951	80.3 to 81.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
124968	88.2 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
124969	91.1 to 102.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
124979	102.6 to 116.3 feet	Key Note Segment		5 ft	69			
124953	103.2 to 104.2 feet	**Vertical Change**	1.38"	5 ft	5	REF		
124954	111.3 to 112.3 feet	**Vertical Change**	.95"	5 ft	5	REF		
124970	116.3 to 125.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	47	SF	$40	**$1,860**
124955	117.3 to 118.3 feet	**Vertical Change**	-.61"	5 ft	5	REF		
124956	120.7 to 121.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
124971	126.3 to 128.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
124972	131.2 to 139.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
124958	137.2 to 138.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
124973	139.2 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
124974	146.2 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
124959	147.6 to 148.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
124980	161.6 to 177.5 feet	Key Note Segment		5 ft	80			
124960	170.6 to 171.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
124975	181.8 to 187.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071556	CARMEN AVE	ANNA AVE	1420 CARMEN AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124981	189.6 to 205.8 feet	Key Note Segment		5 ft	81			
124961	190.6 to 191.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
124976	206.2 to 212.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	33	SF	$40	**$1,320**

TOTAL COST FOR: S *side of* **CARMEN AVE** *Starting at:* **ANNA AVE** **$44,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071242	CARMEN AVE	BRIQUEL AVE	MERCED ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123375	0.0 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
123376	22.3 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
123396	25.3 to 39.1 feet	Key Note Segment		5 ft	69			
123369	26.0 to 27.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
123370	29.6 to 30.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
123377	39.1 to 42.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
123397	51.2 to 64.9 feet	Key Note Segment		5 ft	69			
123378	74.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
123379	86.5 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
123380	92.7 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
123381	98.1 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
123382	103.5 to 105.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
123383	105.3 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
123384	109.3 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
123385	115.3 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
123398	126.3 to 138.9 feet	Key Note Segment		5 ft	63			
123386	139.3 to 150.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,180**
123399	151.6 to 165.3 feet	Key Note Segment		5 ft	69			
123387	171.5 to 179.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
123371	174.7 to 175.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
123372	180.6 to 181.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
123388	181.3 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
123389	186.1 to 210.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,460**
123390	210.2 to 225.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
123400	225.7 to 239.5 feet	Key Note Segment		5 ft	69			
123373	234.5 to 235.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
123391	240.8 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
123401	251.5 to 265.0 feet	Key Note Segment		5 ft	68			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071242	CARMEN AVE	BRIQUEL AVE	MERCED ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123392	265.4 to 271.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	33	SF	$40	**$1,300**
123374	268.8 to 269.8 feet	Vertical Change	.28"	5 ft	5	REF		
123393	272.1 to 275.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
123394	275.9 to 278.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
123395	279.2 to 296.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**

TOTAL COST FOR: N *side of* **CARMEN AVE** *Starting at:* **BRIQUEL AVE** **$69,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071247	CARMEN AVE	MERCED ST	ANNA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123419	1.0 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
123402	6.3 to 7.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
123403	19.2 to 20.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123420	25.0 to 29.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
123450	29.6 to 43.6 feet	Key Note Segment		5 ft	70			
123421	43.8 to 53.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	48	SF	$40	**$1,900**
123422	53.8 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
123404	53.9 to 54.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
123451	55.3 to 68.8 feet	Key Note Segment		5 ft	68			
123405	60.9 to 61.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
123423	69.3 to 71.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
123424	75.0 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
123406	89.4 to 90.4 feet	**Vertical Change**	1.74"	5 ft	5	REF		
123425	89.8 to 102.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
123426	103.1 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
123427	117.3 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
123428	131.6 to 132.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
123452	132.8 to 146.6 feet	Key Note Segment		5 ft	69			
123408	133.5 to 134.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
123429	147.2 to 159.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	59	SF	$40	**$2,360**
123409	147.5 to 148.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
123453	159.0 to 172.7 feet	Key Note Segment		5 ft	69			
123430	172.7 to 190.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	88	SF	$40	**$3,520**
123410	173.6 to 174.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
123431	191.4 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
123432	197.4 to 199.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
123433	200.4 to 222.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
123434	224.4 to 228.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071247	CARMEN AVE	MERCED ST	ANNA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123411	225.9 to 226.9 feet	Vertical Change	.44"	5 ft	5	REF		
123435	230.8 to 236.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,240
123454	236.3 to 249.3 feet	Key Note Segment		5 ft	65			
123436	249.3 to 262.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	65	SF	$40	$2,600
123412	251.0 to 254.2 feet	Vertical Change	.29"	5 ft	16	REF		
123455	262.3 to 278.3 feet	Key Note Segment		5 ft	80			
123437	281.7 to 318.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	$22,320
123413	305.0 to 306.0 feet	Vertical Change	-.26"	5 ft	5	REF		
123438	318.9 to 322.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
123439	323.2 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
123460	329.3 to 330.3 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
123456	339.8 to 353.5 feet	Key Note Segment		5 ft	69			
123440	353.8 to 355.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	$340
123457	364.8 to 379.7 feet	Key Note Segment		5 ft	75			
123414	373.2 to 374.2 feet	Vertical Change	-.26"	5 ft	5	REF		
123441	380.6 to 386.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
123415	385.3 to 386.3 feet	Vertical Change	-.45"	5 ft	5	REF		
123442	392.9 to 398.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
123416	398.3 to 399.3 feet	Vertical Change	.3"	5 ft	5	REF		
123443	399.3 to 417.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	$10,800
123444	421.2 to 438.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,320
123445	438.6 to 442.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
123458	443.3 to 456.3 feet	Key Note Segment		5 ft	65			
123446	456.3 to 465.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	48	SF	$40	$1,920
123418	456.7 to 457.7 feet	Vertical Change	.52"	5 ft	5	REF		
123447	466.4 to 467.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$720
123459	468.7 to 482.6 feet	Key Note Segment		5 ft	70			
123448	484.5 to 503.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	$11,640

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071247	CARMEN AVE	MERCED ST	ANNA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123449	508.3 to 509.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **CARMEN AVE** *Starting at:* **MERCED ST** **$156,859.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111012	CARRY AVE	KNOX AVE	LILLY ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57949	9.2 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,016**
57932	18.0 to 19.0 feet	**Vertical Change**	-.3"	4 ft	4	REF		
57967	35.3 to 44.4 feet	Key Note Segment		4 ft	36			
57933	35.6 to 36.6 feet	**Vertical Change**	.27"	4 ft	4	REF		
57934	44.3 to 45.3 feet	**Vertical Change**	-.35"	4 ft	4	REF		
57968	55.8 to 64.4 feet	Key Note Segment		4 ft	34			
57950	64.6 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
57935	73.0 to 74.0 feet	**Vertical Change**	.83"	4 ft	4	SF	$75	**$300**
57969	90.1 to 100.3 feet	Key Note Segment		4 ft	41			
57951	107.3 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
57952	122.8 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
57936	124.5 to 125.5 feet	**Vertical Change**	.39"	4 ft	4	REF		
57953	137.1 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
57970	143.8 to 152.8 feet	Key Note Segment		4 ft	36			
57971	164.1 to 172.9 feet	Key Note Segment		4 ft	35			
57937	174.1 to 175.1 feet	**Vertical Change**	1.82"	4 ft	4	SF	$75	**$300**
57954	191.4 to 193.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
57955	213.2 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
57938	224.4 to 225.4 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
57939	235.3 to 236.3 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
57940	241.5 to 242.5 feet	**Vertical Change**	-1.97"	4 ft	4	SF	$75	**$300**
57956	244.8 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
57972	251.8 to 262.3 feet	Key Note Segment		4 ft	42			
57941	252.7 to 253.7 feet	**Vertical Change**	-.44"	4 ft	4	REF		
57957	268.3 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
57973	271.8 to 282.0 feet	Key Note Segment		4 ft	41			
57958	282.0 to 283.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	6	SF	$40	**$256**
57959	283.6 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111012	CARRY AVE	KNOX AVE	LILLY ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57942	303.1 to 304.1 feet	Vertical Change	-.4"	4 ft	4	LF	$75	$300
57943	315.9 to 316.9 feet	Vertical Change	-1.09"	4 ft	4	SF	$75	$300
57960	319.3 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
57961	327.4 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	$8,592
57962	354.2 to 355.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$480
57974	360.1 to 369.6 feet	Key Note Segment		4 ft	38			
57963	369.8 to 372.3 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	10	SF	$40	$400
57964	374.8 to 379.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,160
57975	380.6 to 391.1 feet	Key Note Segment		4 ft	42			
57944	390.1 to 391.1 feet	Vertical Change	.28"	4 ft	4	REF		
57945	403.5 to 404.5 feet	Vertical Change	.32"	4 ft	4	LF	$75	$300
57946	416.9 to 417.9 feet	Vertical Change	.36"	4 ft	4	LF	$75	$300
57965	431.4 to 433.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$960
57976	435.0 to 443.9 feet	Key Note Segment		4 ft	36			
57947	462.7 to 463.7 feet	Vertical Change	.34"	4 ft	4	LF	$75	$300
57948	477.2 to 478.2 feet	Vertical Change	-.42"	4 ft	4	LF	$75	$300
57966	478.6 to 479.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480

TOTAL COST FOR: S *side of* **CARRY AVE** *Starting at:* **KNOX AVE** **$43,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111008	CARRY AVE	LILLY ST	KNOX AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57897	0.1 to 31.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	126	SF	$120	**$15,072**
57874	0.5 to 1.5 feet	**Vertical Change**	.27"	4 ft	4	REF		
57875	17.8 to 18.8 feet	**Vertical Change**	.56"	4 ft	4	REF		
57919	32.4 to 42.9 feet	Key Note Segment		4 ft	42			
57898	43.3 to 44.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	6	SF	$40	**$240**
57899	44.8 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,488**
57900	62.5 to 74.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	48	SF	$120	**$5,760**
57901	76.1 to 77.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$624**
57902	77.8 to 79.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	**$720**
57903	79.9 to 86.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	25	SF	$120	**$2,976**
57920	86.3 to 96.8 feet	Key Note Segment		4 ft	42			
57876	87.0 to 88.0 feet	**Vertical Change**	-1.29"	4 ft	4	REF		
57877	95.5 to 96.5 feet	**Vertical Change**	.33"	4 ft	4	REF		
57904	96.8 to 106.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	40	SF	$40	**$1,616**
57878	105.9 to 106.9 feet	**Vertical Change**	-.28"	4 ft	4	REF		
57921	107.7 to 116.7 feet	Key Note Segment		4 ft	36			
57879	116.5 to 117.5 feet	**Vertical Change**	-.43"	4 ft	4	REF		
57905	116.7 to 118.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	8	SF	$40	**$304**
57906	122.9 to 126.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
57907	131.0 to 138.3 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	29	SF	$120	**$3,504**
57922	140.7 to 151.6 feet	Key Note Segment		4 ft	44			
57880	141.1 to 142.1 feet	**Vertical Change**	-.33"	4 ft	4	REF		
57908	151.6 to 159.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	32	SF	$40	**$1,296**
57881	151.9 to 152.9 feet	**Vertical Change**	.32"	4 ft	4	REF		
57923	160.3 to 170.0 feet	Key Note Segment		4 ft	39			
57909	170.9 to 173.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
57910	174.1 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
57911	181.3 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111008	CARRY AVE	LILLY ST	KNOX AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57912	189.9 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,672**
57924	194.7 to 203.5 feet	Key Note Segment		4 ft	35			
57882	203.9 to 204.9 feet	**Vertical Change**	-.34"	4 ft	4	REF		
57925	215.2 to 224.8 feet	Key Note Segment		4 ft	38			
57883	216.1 to 217.1 feet	**Vertical Change**	-.36"	4 ft	4	REF		
57913	227.5 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
57884	237.0 to 238.0 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
57914	238.4 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,880**
57885	270.2 to 271.2 feet	**Vertical Change**	1.33"	4 ft	4	SF	$75	**$300**
57915	273.2 to 283.3 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	40	SF	$120	**$4,848**
57916	284.8 to 286.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	8	SF	$120	**$912**
57886	287.3 to 288.3 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
57926	290.4 to 312.3 feet	Key Note Segment		4 ft	88			
57887	290.9 to 291.9 feet	**Vertical Change**	-.36"	4 ft	4	REF		
57917	313.0 to 323.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,848**
57927	323.1 to 334.0 feet	Key Note Segment		4 ft	44			
57888	351.8 to 352.8 feet	**Vertical Change**	-1.35"	4 ft	4	SF	$75	**$300**
57928	356.8 to 366.5 feet	Key Note Segment		4 ft	39			
57889	357.5 to 358.5 feet	**Vertical Change**	-.62"	4 ft	4	REF		
57890	362.2 to 363.2 feet	**Vertical Change**	2.92"	4 ft	4	REF		
57929	376.7 to 386.3 feet	Key Note Segment		4 ft	38			
57891	386.7 to 387.7 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
57930	411.4 to 422.2 feet	Key Note Segment		4 ft	43			
57892	412.1 to 413.1 feet	**Vertical Change**	-.32"	4 ft	4	REF		
57931	432.0 to 443.1 feet	Key Note Segment		4 ft	44			
57894	433.2 to 434.2 feet	**Vertical Change**	.65"	4 ft	4	REF		
57895	441.7 to 442.7 feet	**Vertical Change**	.4"	4 ft	4	REF		
57896	451.3 to 452.3 feet	**Vertical Change**	-.44"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111008	CARRY AVE	LILLY ST	KNOX AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57918	463.8 to 479.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,584**

TOTAL COST FOR: N *side of* **CARRY AVE** *Starting at:* **LILLY ST** **$80,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281219	CASHEW CT	1463 CASHEW CT	CHESTNUT AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112698	1.9 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
112696	3.3 to 4.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
112699	7.0 to 27.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**
112700	28.3 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
112701	32.8 to 40.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
112706	42.3 to 61.3 feet	Key Note Segment		5 ft	95			
112702	66.4 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112707	68.6 to 87.6 feet	Key Note Segment		5 ft	95			
112697	70.4 to 71.4 feet	**Vertical Change**	.76"	5 ft	5	REF		
112703	90.2 to 95.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
112704	95.7 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
112705	108.3 to 117.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: E *side of* **CASHEW CT** *Starting at:* **1463 CASHEW CT** **$37,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281217	CASHEW CT	1492 CASHEW CT	1493 CASHEW CT	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112689	3.2 to 4.2 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
112691	5.2 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
112692	33.1 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
112693	51.5 to 59.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
112690	58.4 to 59.4 feet	Vertical Change	-.27"	5 ft	5	REF		
112694	59.2 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
112695	69.2 to 70.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **CASHEW CT** *Starting at:* **1492 CASHEW CT** **$34,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281216	CASHEW CT	CHESTNUT AVE	1492 CASHEW CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112673	2.9 to 3.9 feet	Vertical Change	3.43"	5 ft	5	SF	$75	$375
112678	15.6 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
112674	17.4 to 18.4 feet	Vertical Change	-.3"	5 ft	5	REF		
112686	29.8 to 49.4 feet	Key Note Segment		5 ft	98			
112687	55.8 to 75.2 feet	Key Note Segment		5 ft	97			
112675	65.2 to 66.2 feet	Vertical Change	-.43"	5 ft	5	REF		
112679	77.7 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	$14,580
112680	102.0 to 118.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,720
112688	119.2 to 138.2 feet	Key Note Segment		5 ft	95			
112676	138.8 to 139.8 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
112681	140.8 to 144.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,220
112682	146.8 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,500
112683	166.3 to 183.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	$10,560
112677	179.1 to 180.1 feet	Vertical Change	.87"	5 ft	5	REF		
112684	183.9 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
112685	188.8 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600

TOTAL COST FOR: W *side of* **CASHEW CT** *Starting at:* **CHESTNUT AVE** **$60,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161435	CEDAR CREEK LN	3014 FOREST LN	3014 FOREST LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87229	0.0 to 27.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,320**
87226	3.7 to 4.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
87227	14.2 to 15.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
87230	27.2 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
87231	31.7 to 47.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
87232	48.3 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
87228	49.0 to 50.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **CEDAR CREEK LN** *Starting at:* **3014 FOREST LN** **$38,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151512	CEDAR CREEK LN	CREEK DR	TIMBERLINE DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83814	1.2 to 23.8 feet	Key Note Segment		5 ft	113			
83798	27.5 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
83799	34.8 to 36.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
83791	36.8 to 37.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
83815	36.9 to 57.6 feet	Key Note Segment		5 ft	104			
83800	60.1 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
83801	77.2 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
83802	83.6 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
83816	90.6 to 113.6 feet	Key Note Segment		5 ft	115			
83803	115.7 to 118.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
83817	118.0 to 140.7 feet	Key Note Segment		5 ft	113			
83792	131.2 to 132.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
83804	144.3 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83805	149.5 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
83793	154.8 to 155.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
83806	156.3 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
83794	163.1 to 164.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
83807	165.2 to 174.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
83808	174.4 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
83809	182.2 to 193.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
83818	194.2 to 216.6 feet	Key Note Segment		5 ft	112			
83795	195.7 to 196.7 feet	**Vertical Change**	-.44"	5 ft	5	REF		
83796	209.6 to 210.6 feet	**Vertical Change**	.7"	5 ft	5	REF		
83810	219.4 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
83819	222.2 to 242.7 feet	Key Note Segment		5 ft	103			
83797	240.7 to 241.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
83811	245.0 to 252.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
83812	255.2 to 257.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151512	CEDAR CREEK LN	CREEK DR	TIMBERLINE DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83813	261.8 to 269.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: N *side of* **CEDAR CREEK LN** *Starting at:* **CREEK DR** **$45,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151526	CEDAR CREEK LN	TIMBERLINE DR	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83980	0.0 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,380**
83981	5.4 to 6.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**
83982	12.5 to 21.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,580**
83983	21.8 to 24.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	11	SF	$120	**$1,320**
83984	27.3 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83978	30.5 to 31.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
83985	47.3 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
83986	63.4 to 64.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83987	64.8 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
83988	78.4 to 81.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
83989	84.0 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83990	87.7 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
83991	93.3 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
83992	97.8 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
83993	109.6 to 110.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83994	116.8 to 119.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
83995	119.6 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
83996	125.8 to 128.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
83997	129.2 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
83998	135.3 to 136.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
83999	142.2 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84000	145.8 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
84001	150.7 to 154.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
84002	159.2 to 167.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
84003	171.5 to 172.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
84004	173.4 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
84005	176.8 to 177.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
84006	184.3 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151526	CEDAR CREEK LN	TIMBERLINE DR	WESTBERRY BVD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84007	204.5 to 207.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
84008	207.9 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
84009	213.2 to 220.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
83979	220.8 to 221.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **CEDAR CREEK LN** *Starting at:* **TIMBERLINE DR** **$77,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151514	CEDAR CREEK LN	TIMBERLINE DR	CREEK DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83829	0.0 to 9.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
83830	11.3 to 23.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
83831	25.0 to 26.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
83832	29.0 to 32.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
83820	30.7 to 31.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
83833	35.1 to 40.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
83834	43.4 to 70.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$16,020**
83821	55.5 to 56.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
83835	71.8 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
83836	78.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
83837	85.6 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
83822	86.8 to 87.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
83838	90.8 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	202	SF	$120	**$24,180**
83823	120.1 to 121.1 feet	**Vertical Change**	.5"	5 ft	5	REF		
83824	128.7 to 129.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
83839	134.1 to 137.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
83825	136.7 to 137.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
83840	137.7 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
83841	147.3 to 152.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
83826	152.7 to 153.7 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
83842	154.4 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
83827	160.8 to 161.8 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
83843	163.5 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
83844	165.9 to 168.8 feet		5.0-6.0%	5 ft	15			
83845	165.9 to 168.8 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
83828	168.9 to 169.9 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **CEDAR CREEK LN** *Starting at:* **TIMBERLINE DR** **$84,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151451	CEDAR CREEK LN	WESTBERRY BVD	TIMBERLINE DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83497	1.8 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83498	3.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
83511	12.2 to 34.2 feet	Key Note Segment		5 ft	110			
83493	13.9 to 14.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
83494	33.8 to 34.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
83499	35.0 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
83500	43.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
83501	47.7 to 64.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
83495	67.0 to 68.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
83502	69.1 to 70.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83503	73.7 to 75.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
83504	75.9 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
83505	88.9 to 91.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
83512	91.3 to 112.8 feet	Key Note Segment		5 ft	108			
83506	115.5 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
83513	118.8 to 139.7 feet	Key Note Segment		5 ft	104			
83507	141.3 to 149.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
83508	152.4 to 154.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
83509	158.1 to 159.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83510	160.9 to 162.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
83514	162.3 to 163.6 feet		5.0-6.0%	5 ft	6			
83496	163.8 to 164.8 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **CEDAR CREEK LN** *Starting at:* **WESTBERRY BVD** **$40,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211038	CENTRAL AVE	N A ST	N B ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42476	0.1 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
42467	0.9 to 1.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
42468	21.2 to 22.2 feet	**Vertical Change**	.57"	5 ft	5	REF		
42469	28.3 to 29.3 feet	**Vertical Change**	.6"	5 ft	5	REF		
42477	30.8 to 32.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
42470	33.9 to 34.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
42478	38.8 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
42501	50.6 to 68.3 feet	Key Note Segment		5 ft	89			
42479	68.3 to 70.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
42471	68.5 to 69.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
42480	73.9 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
42472	78.4 to 79.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
42481	83.4 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
42473	102.5 to 103.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
42482	106.7 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
42474	117.2 to 118.2 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
42483	131.3 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
42502	148.7 to 158.3 feet	Key Note Segment		5 ft	48			
42484	185.0 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
42475	205.7 to 206.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
42485	206.5 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
42503	210.3 to 220.6 feet	Key Note Segment		5 ft	52			
42486	220.8 to 225.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	21	SF	$40	**$840**
42487	225.0 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
42504	254.3 to 262.1 feet	Key Note Segment		5 ft	39			
42488	262.1 to 264.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$460**
42489	266.3 to 282.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
42490	284.5 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211038	CENTRAL AVE	N A ST	N B ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42505	297.8 to 306.8 feet	Key Note Segment		5 ft	45			
42491	308.3 to 310.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
42492	312.3 to 315.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
42493	315.4 to 316.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
42494	318.9 to 331.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
42506	332.9 to 333.9 feet	**Continuous Width**	15"	5 ft	5	SF	$120	**$600**
42495	336.8 to 343.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
42496	344.6 to 351.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
42497	351.3 to 353.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
42498	358.3 to 365.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
42499	368.7 to 372.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
42500	374.1 to 386.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**

TOTAL COST FOR: N *side of* **CENTRAL AVE** *Starting at:* **N A ST** **$116,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211201	CENTRAL AVE	N A ST	N LAKE ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42863	3.6 to 4.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
42876	7.9 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
42877	60.8 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
42864	69.5 to 70.5 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
42878	72.8 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
42865	78.1 to 79.1 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
42879	84.3 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
42880	90.6 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
42881	96.3 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
42891	111.3 to 126.5 feet	Key Note Segment		5 ft	76			
42866	126.9 to 127.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
42892	146.8 to 161.8 feet	Key Note Segment		5 ft	75			
42867	161.2 to 162.2 feet	Vertical Change	-.43"	5 ft	5	REF		
42882	161.8 to 166.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	21	SF	$40	$840
42893	167.1 to 198.0 feet	Key Note Segment		5 ft	155			
42883	198.0 to 199.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$260
42869	201.8 to 202.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
42870	222.8 to 223.8 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
42871	239.9 to 240.9 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
42884	255.3 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
42872	256.8 to 257.8 feet	Vertical Change	-.27"	5 ft	5	REF		
42885	262.6 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,620
42886	276.2 to 277.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
42887	281.0 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
42873	284.2 to 285.2 feet	Vertical Change	-.36"	5 ft	5	REF		
42888	288.9 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
42889	294.5 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
42874	295.0 to 296.0 feet	Vertical Change	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211201	CENTRAL AVE	N A ST	N LAKE ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42894	301.7 to 326.0 feet	Key Note Segment		5 ft	122			
42890	344.8 to 348.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
42875	356.1 to 357.1 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **CENTRAL AVE** *Starting at:* **N A ST** **$38,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211044	CENTRAL AVE	N B ST	RIVERWALK DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42516	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
42517	1.8 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
42511	6.9 to 7.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
42518	10.5 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
42519	21.0 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
42520	27.8 to 29.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
42521	29.1 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
42522	44.2 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
42523	50.3 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
42542	61.2 to 71.2 feet	Key Note Segment		5 ft	50			
42524	71.2 to 72.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
42525	76.3 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
42526	82.6 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
42543	105.0 to 113.2 feet	Key Note Segment		5 ft	41			
42548	113.4 to 115.6 feet		5.0-6.0%	5 ft	11			
42549	113.4 to 115.6 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
42544	136.5 to 151.6 feet	Key Note Segment		5 ft	76			
42527	161.5 to 166.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
42528	169.3 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
42529	187.8 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
42545	195.2 to 210.8 feet	Key Note Segment		5 ft	78			
42530	210.8 to 212.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
42531	228.3 to 244.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
42546	244.4 to 259.6 feet	Key Note Segment		5 ft	76			
42532	259.6 to 263.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	21	SF	$40	**$840**
42533	263.8 to 273.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
42534	276.3 to 279.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
42535	279.3 to 284.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211044	CENTRAL AVE	N B ST	RIVERWALK DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42512	308.8 to 309.8 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
42536	325.1 to 329.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820
42547	335.0 to 343.9 feet	Key Note Segment		5 ft	45			
42537	347.9 to 353.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
42538	354.1 to 357.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
42513	358.5 to 359.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
42514	373.6 to 374.6 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
42515	383.4 to 384.4 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
42539	385.3 to 387.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
42540	390.3 to 398.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
42541	398.5 to 403.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,060

TOTAL COST FOR: N *side of* **CENTRAL AVE** *Starting at:* **N B ST** **$89,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211155	CENTRAL AVE	N B ST	3RD ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42850	7.1 to 37.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$18,000**
42851	37.3 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
42842	44.4 to 45.4 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
42843	46.2 to 47.2 feet	Vertical Change	.73"	5 ft	5	SF	$75	**$375**
42852	48.9 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
42853	55.6 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
42854	81.6 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
42844	97.1 to 98.1 feet	Vertical Change	.49"	5 ft	5	LF	$75	**$375**
42855	109.4 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
42856	125.6 to 128.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
42845	134.7 to 135.7 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
42857	146.8 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
42858	151.8 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
42846	169.0 to 170.0 feet	Vertical Change	-.41"	5 ft	5	LF	$75	**$375**
42859	170.5 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
42847	194.6 to 195.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
42860	201.6 to 205.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
42848	203.4 to 204.4 feet	Vertical Change	.37"	5 ft	5	REF		
42861	217.9 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
42862	224.3 to 225.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
42849	229.5 to 230.5 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **CENTRAL AVE** *Starting at:* **N B ST** **$60,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211148	CENTRAL AVE	N C ST	2ND ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42833	40.5 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
42834	55.8 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
42835	62.3 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
42836	68.3 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
42837	91.3 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**

TOTAL COST FOR: S *side of* **CENTRAL AVE** *Starting at:* **N C ST** **$14,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211055	CENTRAL AVE	N D ST	N C ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42579	0.0 to 1.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
42580	3.5 to 18.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,060**
42581	18.6 to 24.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
42582	24.3 to 34.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,300**
42576	33.9 to 34.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
42583	34.8 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
42584	36.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
42585	45.8 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
42586	54.9 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
42587	85.7 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
42597	90.4 to 115.9 feet	Key Note Segment		5 ft	128			
42588	120.8 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
42598	121.9 to 144.4 feet	Key Note Segment		5 ft	113			
42589	146.8 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
42590	159.2 to 166.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
42591	166.3 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
42592	176.8 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
42593	248.6 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
42599	265.5 to 280.8 feet	Key Note Segment		5 ft	77			
42577	272.2 to 273.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
42594	281.8 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
42595	292.7 to 298.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
42578	293.1 to 294.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
42596	301.0 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**

TOTAL COST FOR: S *side of* **CENTRAL AVE** *Starting at:* **N D ST** **$74,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211002	CENTRAL AVE	N LAKE ST	N A ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42140	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
42141	1.3 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
42142	24.6 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
42143	59.6 to 64.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
42144	79.1 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
42145	96.7 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
42135	97.8 to 98.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
42146	103.2 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
42147	115.2 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
42148	123.2 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
42136	130.9 to 131.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
42137	135.0 to 136.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
42149	156.4 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
42162	171.7 to 179.7 feet	Key Note Segment		5 ft	40			
42150	187.4 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
42138	215.4 to 216.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
42151	225.6 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
42152	249.9 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
42153	273.9 to 275.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
42163	275.1 to 288.2 feet	Key Note Segment		5 ft	65			
42154	288.2 to 289.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
42155	295.0 to 312.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
42156	315.3 to 316.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
42157	317.5 to 325.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
42158	326.6 to 328.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
42159	330.9 to 336.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
42160	340.8 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
42161	348.8 to 379.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211002	CENTRAL AVE	N LAKE ST	N A ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42139	379.2 to 380.2 feet	Vertical Change	.43"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **CENTRAL AVE** *Starting at:* **N LAKE ST** **$145,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105211048	CENTRAL AVE	RIVERWALK DR	N D ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42552	0.1 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
42553	2.8 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
42554	6.7 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
42555	21.9 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
42556	42.4 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
42570	59.8 to 87.5 feet	Key Note Segment		5 ft	139			
42557	87.5 to 111.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	118	SF	$40	**$4,700**
42571	115.5 to 125.8 feet	Key Note Segment		5 ft	52			
42558	125.8 to 152.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	132	SF	$40	**$5,280**
42550	151.4 to 152.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
42572	152.2 to 161.4 feet	Key Note Segment		5 ft	46			
42559	161.4 to 164.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$620**
42560	164.5 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
42573	186.4 to 200.0 feet	Key Note Segment		5 ft	68			
42561	208.9 to 210.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
42562	213.6 to 214.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
42574	217.8 to 239.4 feet	Key Note Segment		5 ft	108			
42563	239.4 to 241.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$460**
42564	245.1 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
42565	262.7 to 273.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
42551	271.9 to 272.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
42566	275.0 to 287.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
42567	292.0 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
42575	308.2 to 319.4 feet	Key Note Segment		5 ft	56			
42568	319.7 to 325.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
42569	326.8 to 329.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **CENTRAL AVE** *Starting at:* **RIVERWALK DR** **$70,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141136	CENTRAL CT	W CENTRAL AVE	W CENTRAL AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101871	0.2 to 2.8 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	8	SF	$120	**$936**
101872	3.2 to 5.2 feet	Cross Slope (PAR)	11.0-12.0%	3 ft	6	SF	$120	**$720**
101873	7.4 to 19.4 feet	Cross Slope (PAR)	12.0-13.0%	3 ft	36	SF	$120	**$4,320**
101860	16.7 to 17.7 feet	**Vertical Change**	.39"	3 ft	3	REF		
101874	19.7 to 20.7 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	3	SF	$120	**$360**
101861	22.3 to 23.3 feet	**Vertical Change**	1.18"	3 ft	3	SF	$75	**$225**
101899	22.6 to 45.8 feet	Key Note Segment		3 ft	70			
101875	48.6 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101876	54.1 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$432**
101900	56.2 to 72.3 feet	Key Note Segment		3 ft	48			
101862	72.9 to 73.9 feet	**Vertical Change**	.31"	3 ft	3	LF	$75	**$225**
101863	79.7 to 80.7 feet	**Vertical Change**	-.27"	3 ft	3	LF	$75	**$225**
101877	85.8 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101878	96.3 to 97.3 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101879	99.0 to 100.2 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
101880	100.6 to 101.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	**$432**
101881	104.1 to 105.1 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101882	105.1 to 107.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$792**
101883	107.8 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,080**
101901	112.5 to 129.3 feet	Key Note Segment		3 ft	50			
101884	130.2 to 131.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
101864	130.3 to 131.3 feet	**Vertical Change**	-.74"	3 ft	3	REF		
101885	132.0 to 133.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$396**
101886	133.8 to 139.0 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	16	SF	$120	**$1,872**
101865	140.1 to 141.1 feet	**Vertical Change**	1.19"	3 ft	3	SF	$75	**$225**
101902	140.8 to 154.8 feet	Key Note Segment		3 ft	42			
101887	154.8 to 157.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	7	SF	$40	**$288**
101888	171.2 to 172.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$612**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141136	CENTRAL CT	W CENTRAL AVE	W CENTRAL AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101889	173.8 to 176.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$1,008**
101866	174.2 to 175.2 feet	**Vertical Change**	-.56"	3 ft	3	REF		
101890	176.6 to 177.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101891	177.7 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$576**
101892	182.2 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101867	186.3 to 187.3 feet	**Vertical Change**	.41"	3 ft	3	LF	$75	**$225**
101893	190.1 to 191.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101868	192.0 to 195.0 feet	**Vertical Change**	.42"	3 ft	9	LF	$75	**$675**
101894	197.9 to 198.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101869	198.0 to 199.0 feet	**Vertical Change**	.26"	3 ft	3	REF		
101895	203.2 to 204.5 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	**$468**
101903	205.3 to 220.5 feet	Key Note Segment		3 ft	46			
101896	221.4 to 223.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	6	SF	$120	**$720**
101897	224.8 to 226.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	6	SF	$120	**$720**
101870	226.0 to 227.0 feet	**Vertical Change**	-.38"	3 ft	3	REF		
101898	227.8 to 229.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	6	SF	$120	**$756**

TOTAL COST FOR: E/N/W *side of* **CENTRAL CT** *Starting at:* **W CENTRAL AVE** **$22,284.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141111	CENTRAL PL	CENTRAL PL	W CENTRAL AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101487	5.9 to 6.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
101496	17.6 to 18.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
101488	28.2 to 29.2 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
101497	32.9 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
101489	33.9 to 34.9 feet	Vertical Change	-.27"	5 ft	5	REF		
101490	40.3 to 41.3 feet	Vertical Change	-.48"	5 ft	5	LF	$75	**$375**
101491	45.8 to 46.8 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
101492	49.6 to 54.6 feet	Vertical Change	.44"	5 ft	25	LF	$75	**$1,875**
101493	56.0 to 57.0 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
101494	58.0 to 59.0 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
101498	62.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101495	64.4 to 65.4 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
101499	71.3 to 74.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,980**
101500	73.7 to 75.1 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **CENTRAL PL** *Starting at:* **CENTRAL PL** **$11,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141109	CENTRAL PL	FISK CT	CENTRAL PL	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101470	0.0 to 3.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
101471	6.4 to 13.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
101463	13.8 to 14.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
101472	13.8 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
101464	20.8 to 21.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
101465	27.9 to 28.9 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
101473	29.0 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
101474	33.4 to 36.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
101475	37.2 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
101476	43.3 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
101466	48.5 to 54.6 feet	**Vertical Change**	.34"	5 ft	31	REF		
101477	49.5 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101478	55.2 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101467	56.4 to 57.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
101468	58.2 to 59.2 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
101469	60.8 to 61.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
101479	61.2 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101480	65.8 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
101481	66.8 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
101482	73.0 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
101483	77.6 to 80.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
101484	83.7 to 84.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
101485	84.8 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101486	89.7 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: E *side of* **CENTRAL PL** *Starting at:* **FISK CT** **$29,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141105	CENTRAL PL	JEFFERSON AVE	FISK CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101418	4.8 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101419	9.8 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
101420	22.4 to 25.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
101421	26.4 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
101422	29.9 to 38.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
101423	38.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
101410	40.7 to 41.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
101424	42.2 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101411	42.4 to 43.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
101412	44.1 to 47.2 feet	**Vertical Change**	.3"	5 ft	16	LF	$75	**$1,163**
101425	45.8 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
101414	53.5 to 56.4 feet	**Vertical Change**	-.26"	5 ft	15	LF	$75	**$1,088**
101415	57.8 to 62.6 feet	**Vertical Change**	.32"	5 ft	24	LF	$75	**$1,800**
101426	65.3 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101427	67.8 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
101416	68.7 to 69.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
101428	72.6 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
101417	76.5 to 77.5 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **CENTRAL PL** *Starting at:* **JEFFERSON AVE** **$29,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141100	CENTRAL PL	RIVERVIEW DR	W CENTRAL AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101335	0.7 to 10.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	28	SF	$120	**$3,348**
101336	10.8 to 17.5 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	20	SF	$120	**$2,412**
101337	20.4 to 21.4 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101338	25.0 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	10	SF	$120	**$1,224**
101339	30.5 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$972**
101324	34.6 to 35.6 feet	Vertical Change	-.26"	3 ft	3	LF	$75	**$225**
101340	38.4 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**
101341	46.3 to 55.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	27	SF	$120	**$3,240**
101342	55.3 to 57.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$756**
101362	58.3 to 73.5 feet	Key Note Segment		3 ft	46			
101325	59.4 to 60.4 feet	Vertical Change	.39"	3 ft	3	REF		
101343	75.8 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101344	77.0 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$756**
101345	83.4 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,224**
101346	91.2 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$864**
101326	94.7 to 95.7 feet	Vertical Change	-.26"	3 ft	3	LF	$75	**$225**
101363	95.7 to 110.3 feet	Key Note Segment		3 ft	44			
101327	96.5 to 97.5 feet	Vertical Change	.34"	3 ft	3	REF		
101347	110.3 to 113.4 feet	Cross Slope (Driveway)	4.0-5.0%	3 ft	9	SF	$40	**$372**
101328	111.3 to 112.3 feet	Vertical Change	.28"	3 ft	3	REF		
101348	116.5 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	28	SF	$120	**$3,348**
101329	124.2 to 125.2 feet	Vertical Change	.33"	3 ft	3	REF		
101349	128.3 to 136.2 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	24	SF	$120	**$2,844**
101350	138.8 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101351	144.2 to 145.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$612**
101352	154.8 to 155.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101330	155.4 to 156.4 feet	Vertical Change	.26"	3 ft	3	REF		
101353	155.9 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141100	CENTRAL PL	RIVERVIEW DR	W CENTRAL AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101354	162.9 to 164.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
101355	167.0 to 173.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	19	SF	$120	**$2,268**
101356	173.3 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$792**
101331	175.3 to 176.3 feet	**Vertical Change**	.32"	3 ft	3	REF		
101332	179.3 to 180.3 feet	**Vertical Change**	.29"	3 ft	3	LF	$75	**$225**
101357	181.4 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	23	SF	$120	**$2,808**
101364	189.6 to 203.2 feet	Key Note Segment		3 ft	41			
101333	203.7 to 204.7 feet	**Vertical Change**	.42"	3 ft	3	LF	$75	**$225**
101358	211.8 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$864**
101334	216.7 to 217.7 feet	**Vertical Change**	.3"	3 ft	3	REF		
101359	217.0 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	49	SF	$120	**$5,868**
101360	234.1 to 236.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	**$792**
101365	239.1 to 240.1 feet		5.0-6.0%	3 ft	3			
101361	239.7 to 241.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$576**

TOTAL COST FOR: W *side of* **CENTRAL PL** *Starting at:* **RIVERVIEW DR** **$41,736.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201140937	CENTRAL PL	W CENTRAL AVE	RIVERVIEW DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100031	0.8 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$900**
100032	7.8 to 10.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	**$828**
100033	15.3 to 34.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	59	SF	$120	**$7,056**
99998	16.0 to 17.0 feet	**Vertical Change**	.7"	3 ft	3	REF		
99999	24.5 to 25.5 feet	**Vertical Change**	.47"	3 ft	3	REF		
100056	34.9 to 48.3 feet	Key Note Segment		3 ft	40			
100000	49.1 to 50.1 feet	**Vertical Change**	.46"	3 ft	3	REF		
100034	50.0 to 51.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
100035	58.3 to 61.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$1,008**
100001	62.0 to 63.0 feet	**Vertical Change**	.34"	3 ft	3	REF		
100036	63.0 to 64.1 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$396**
100037	66.5 to 70.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	11	SF	$120	**$1,260**
100038	70.0 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
100057	73.8 to 87.4 feet	Key Note Segment		3 ft	41			
100002	81.6 to 82.6 feet	**Vertical Change**	.28"	3 ft	3	REF		
100003	86.2 to 87.2 feet	**Vertical Change**	.54"	3 ft	3	REF		
100039	88.8 to 90.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$468**
100040	92.4 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	36	SF	$120	**$4,284**
100004	104.3 to 107.6 feet	**Vertical Change**	.65"	3 ft	10	REF		
100041	106.7 to 108.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	6	SF	$120	**$756**
100005	111.1 to 112.1 feet	**Vertical Change**	.41"	3 ft	3	LF	$75	**$225**
100006	115.6 to 116.6 feet	**Vertical Change**	1.3"	3 ft	3	SF	$75	**$225**
100007	120.1 to 121.1 feet	**Vertical Change**	.31"	3 ft	3	LF	$75	**$225**
100008	126.9 to 127.9 feet	**Vertical Change**	.93"	3 ft	3	SF	$75	**$225**
100009	129.1 to 130.1 feet	**Vertical Change**	1.31"	3 ft	3	REF		
100042	130.0 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	56	SF	$120	**$6,660**
100010	131.5 to 132.5 feet	**Vertical Change**	.87"	3 ft	3	REF		
100011	137.9 to 138.9 feet	**Vertical Change**	.36"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201140937	CENTRAL PL	W CENTRAL AVE	RIVERVIEW DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100012	145.3 to 146.3 feet	Vertical Change	.53"	3 ft	3	REF		
100013	147.5 to 148.5 feet	Vertical Change	-.31"	3 ft	3	REF		
100014	149.4 to 150.4 feet	Vertical Change	.45"	3 ft	3	LF	$75	**$225**
100015	152.1 to 153.1 feet	Vertical Change	1.76"	3 ft	3	SF	$75	**$225**
100043	155.8 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
100044	159.7 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$1,008**
100016	168.2 to 169.2 feet	Vertical Change	2.49"	3 ft	3	SF	$75	**$225**
100045	170.8 to 176.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	**$1,872**
100058	179.0 to 195.2 feet	Key Note Segment		3 ft	49			
100017	186.2 to 187.2 feet	Vertical Change	.27"	3 ft	3	REF		
100018	190.9 to 191.9 feet	Vertical Change	.3"	3 ft	3	REF		
100019	194.8 to 197.7 feet	Vertical Change	.46"	3 ft	9	REF		
100046	198.1 to 199.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$504**
100020	200.8 to 201.8 feet	Vertical Change	-.26"	3 ft	3	LF	$75	**$225**
100047	202.2 to 205.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	**$1,080**
100059	205.2 to 219.2 feet	Key Note Segment		3 ft	42			
100021	207.3 to 208.3 feet	Vertical Change	.44"	3 ft	3	REF		
100022	210.5 to 211.5 feet	Vertical Change	2.38"	3 ft	3	REF		
100048	222.6 to 232.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	30	SF	$120	**$3,636**
100023	225.4 to 226.4 feet	Vertical Change	-.27"	3 ft	3	REF		
100049	232.7 to 234.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$612**
100024	234.5 to 235.5 feet	Vertical Change	.28"	3 ft	3	LF	$75	**$225**
100060	236.0 to 247.3 feet	Key Note Segment		3 ft	34			
100050	248.5 to 252.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	**$1,404**
100025	249.3 to 250.3 feet	Vertical Change	-.31"	3 ft	3	REF		
100051	254.3 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
100026	255.1 to 256.1 feet	Vertical Change	-.28"	3 ft	3	REF		
100061	256.9 to 258.3 feet		5.0-6.0%	3 ft	4			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201140937	CENTRAL PL	W CENTRAL AVE	RIVERVIEW DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100027	260.1 to 261.1 feet	Vertical Change	.79"	3 ft	3	SF	$75	**$225**
100052	266.8 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	11	SF	$120	**$1,260**
100053	271.2 to 274.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$1,008**
100028	273.7 to 274.7 feet	Vertical Change	.32"	3 ft	3	REF		
100029	275.7 to 276.7 feet	Vertical Change	-.26"	3 ft	3	LF	$75	**$225**
100054	277.3 to 283.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	19	SF	$120	**$2,304**
100030	281.7 to 282.7 feet	Vertical Change	.37"	3 ft	3	REF		
100055	284.7 to 286.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$576**

TOTAL COST FOR: E *side of* **CENTRAL PL** *Starting at:* **W CENTRAL AVE** **$43,011.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141103	CENTRAL PL	W CENTRAL AVE	JEFFERSON AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101382	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
101383	7.1 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
101384	14.8 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
101366	17.9 to 18.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
101385	19.5 to 23.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
101386	23.4 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
101387	42.8 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
101388	50.3 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
101389	57.2 to 61.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
101390	61.8 to 74.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,500**
101367	67.6 to 70.8 feet	**Vertical Change**	.32"	5 ft	16	REF		
101391	74.4 to 77.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
101368	77.0 to 78.0 feet	**Vertical Change**	.71"	5 ft	5	REF		
101392	77.3 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
101393	83.1 to 84.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
101394	85.3 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
101369	85.8 to 86.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
101395	90.1 to 93.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
101396	93.6 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
101370	97.9 to 98.9 feet	**Vertical Change**	-.44"	5 ft	5	REF		
101371	99.7 to 100.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
101372	102.7 to 103.7 feet	**Vertical Change**	-.54"	5 ft	5	REF		
101408	105.7 to 106.7 feet	**Continuous Width**	20"	5 ft	5	SF	$120	**$600**
101397	107.2 to 110.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
101373	110.2 to 111.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
101398	111.5 to 112.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
101399	120.0 to 126.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
101375	127.5 to 128.5 feet	**Vertical Change**	2.62"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141103	CENTRAL PL	W CENTRAL AVE	JEFFERSON AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101400	131.8 to 133.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
101376	133.4 to 134.4 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
101377	136.3 to 137.3 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
101401	142.0 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
101402	150.3 to 151.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
101403	152.2 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
101378	159.5 to 160.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
101404	159.9 to 168.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
101379	166.3 to 167.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
101380	169.8 to 170.8 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
101381	174.9 to 175.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
101409	185.8 to 186.8 feet	**Continuous Width**	20"	5 ft	5	SF	$120	**$600**
101405	193.3 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101406	202.4 to 204.8 feet		6.0-7.0%	5 ft	12			
101407	202.4 to 204.8 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: W *side of* **CENTRAL PL** *Starting at:* **W CENTRAL AVE** **$76,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111140	CHABLIS AVE	GAMAY AVE	MERLOT AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91357	1.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
91378	25.3 to 38.7 feet	Key Note Segment		5 ft	67			
91358	38.7 to 44.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,160
91335	39.3 to 40.3 feet	Vertical Change	-.32"	5 ft	5	REF		
91359	50.8 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
91379	54.7 to 68.1 feet	Key Note Segment		5 ft	67			
91336	54.9 to 55.9 feet	Vertical Change	.28"	5 ft	5	REF		
91337	68.8 to 69.8 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375
91360	72.4 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
91361	77.0 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
91338	79.9 to 82.6 feet	Vertical Change	-.3"	5 ft	13	REF		
91362	94.3 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
91339	96.6 to 97.6 feet	Vertical Change	.38"	5 ft	5	REF		
91380	102.4 to 116.8 feet	Key Note Segment		5 ft	72			
91363	116.8 to 127.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	54	SF	$40	$2,160
91340	120.0 to 121.0 feet	Vertical Change	.28"	5 ft	5	REF		
91341	131.1 to 132.1 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
91364	134.3 to 139.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
91385	145.3 to 146.8 feet		5.0-6.0%	5 ft	8			
91342	148.4 to 149.4 feet	Vertical Change	-.97"	5 ft	5	SF	$75	$375
91365	149.9 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
91381	154.0 to 168.7 feet	Key Note Segment		5 ft	74			
91343	167.1 to 168.1 feet	Vertical Change	.45"	5 ft	5	REF		
91366	169.1 to 171.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	14	SF	$40	$560
91344	169.4 to 170.4 feet	Vertical Change	-.35"	5 ft	5	REF		
91346	176.1 to 177.1 feet	Vertical Change	.68"	5 ft	5	SF	$75	$375
91347	184.7 to 185.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
91367	206.6 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111140	CHABLIS AVE	GAMAY AVE	MERLOT AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91382	226.7 to 240.8 feet	Key Note Segment		5 ft	71			
91368	240.8 to 242.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$240
91348	252.2 to 253.2 feet	Vertical Change	-.26"	5 ft	5	REF		
91369	253.2 to 260.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
91349	255.8 to 256.8 feet	Vertical Change	.46"	5 ft	5	REF		
91383	261.5 to 275.9 feet	Key Note Segment		5 ft	72			
91350	264.4 to 265.4 feet	Vertical Change	.29"	5 ft	5	REF		
91352	276.3 to 277.3 feet	Vertical Change	.29"	5 ft	5	REF		
91353	280.5 to 283.7 feet	Vertical Change	.35"	5 ft	16	LF	$75	$1,200
91354	285.9 to 288.9 feet	Vertical Change	.37"	5 ft	15	LF	$75	$1,125
91355	295.5 to 296.5 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
91370	297.0 to 298.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
91356	300.2 to 301.2 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
91371	303.8 to 307.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
91384	309.3 to 323.1 feet	Key Note Segment		5 ft	69			
91372	324.4 to 326.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
91373	331.9 to 332.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
91374	334.2 to 337.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,860
91375	338.0 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
91376	343.3 to 348.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,060
91386	347.1 to 348.3 feet		5.0-6.0%	5 ft	6			
91387	348.3 to 350.9 feet		6.0-7.0%	5 ft	13			
91388	348.3 to 350.9 feet	Running Slope	6.0-7.0%	5 ft	13	SF	$120	$1,560
91377	348.9 to 350.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720

TOTAL COST FOR: W *side of* **CHABLIS AVE** *Starting at:* **GAMAY AVE** **$46,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111137	CHABLIS AVE	MERLOT AVE	GAMAY AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91301	0.1 to 5.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
91289	8.4 to 9.4 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
91290	23.9 to 24.9 feet	**Vertical Change**	-1.17"	5 ft	5	SF	$75	**$375**
91328	26.1 to 39.3 feet	Key Note Segment		5 ft	66			
91302	41.4 to 52.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
91291	55.6 to 56.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
91303	56.3 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91304	62.8 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91329	75.7 to 89.5 feet	Key Note Segment		5 ft	69			
91292	83.7 to 84.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
91305	90.3 to 96.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,240**
91306	96.9 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91293	97.6 to 98.6 feet	**Vertical Change**	2.99"	5 ft	5	REF		
91330	105.9 to 119.1 feet	Key Note Segment		5 ft	66			
91294	106.5 to 107.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
91295	112.7 to 116.6 feet	**Vertical Change**	.28"	5 ft	20	REF		
91307	125.9 to 127.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
91308	130.0 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
91296	134.8 to 135.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
91309	144.3 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91310	151.5 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
91331	153.7 to 168.7 feet	Key Note Segment		5 ft	75			
91297	163.7 to 164.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
91311	171.6 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
91312	174.5 to 175.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
91313	178.1 to 179.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91314	183.8 to 185.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
91315	187.7 to 203.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111137	CHABLIS AVE	MERLOT AVE	GAMAY AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91316	206.0 to 208.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
91317	210.5 to 213.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
91332	213.8 to 227.7 feet	Key Note Segment		5 ft	70			
91298	221.3 to 222.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
91318	227.7 to 240.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	64	SF	$40	**$2,560**
91319	240.5 to 249.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
91320	250.3 to 263.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
91321	267.1 to 269.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
91322	272.0 to 276.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
91323	281.7 to 282.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
91333	282.9 to 297.5 feet	Key Note Segment		5 ft	73			
91299	298.1 to 299.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
91324	298.1 to 300.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$520**
91325	307.7 to 312.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
91334	312.4 to 327.2 feet	Key Note Segment		5 ft	74			
91326	333.1 to 343.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
91300	342.9 to 343.9 feet	**Vertical Change**	.57"	5 ft	5	REF		
91327	343.9 to 349.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: E *side of* **CHABLIS AVE** *Starting at:* **MERLOT AVE** **$71,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081449	CHAPIN ST	E ELLIS ST	POLK AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127385	0.2 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
127382	7.0 to 8.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
127386	14.0 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	643	SF	$120	**$77,220**
127383	78.6 to 79.6 feet	**Vertical Change**	2.21"	5 ft	5	REF		
127387	146.4 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	430	SF	$120	**$51,540**
127388	234.4 to 294.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	298	SF	$120	**$35,760**
127389	298.4 to 309.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
127384	316.7 to 317.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
127390	319.4 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
127391	326.2 to 327.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
127392	327.6 to 329.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
127393	332.2 to 345.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
127394	347.0 to 356.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
127395	354.8 to 356.1 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **CHAPIN ST** *Starting at:* **E ELLIS ST** **$195,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081455	CHAPIN ST	POLK AVE	TAFT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127399	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
127400	5.3 to 10.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
127401	12.3 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
127402	16.3 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
127403	41.8 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	209	SF	$120	**$25,020**
127404	88.4 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	301	SF	$120	**$36,180**
127405	151.2 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
127406	156.3 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
127407	162.0 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
127408	186.5 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
127409	207.3 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
127410	215.7 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
127411	249.8 to 254.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
127412	255.5 to 259.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
127413	259.3 to 271.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
127396	262.2 to 263.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
127414	275.8 to 277.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
127415	279.3 to 296.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
127416	296.2 to 301.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
127417	303.7 to 309.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
127418	312.8 to 330.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
127419	335.0 to 356.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
127420	356.8 to 377.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
127421	377.8 to 393.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
127422	396.3 to 402.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
127423	406.5 to 424.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
127424	426.7 to 431.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
127425	431.8 to 479.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	241	SF	$120	**$28,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081455	CHAPIN ST	POLK AVE	TAFT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127426	479.9 to 492.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
127427	493.9 to 505.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
127428	508.9 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
127429	531.7 to 534.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
127430	537.2 to 543.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
127431	546.6 to 552.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
127432	555.4 to 563.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
127433	567.1 to 571.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
127434	586.3 to 589.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
127435	591.8 to 596.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
127397	594.3 to 595.3 feet	**Vertical Change**	1.07"	5 ft	5	REF		
127436	613.0 to 624.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
127437	628.8 to 633.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
127398	633.2 to 634.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **CHAPIN ST** *Starting at:* **POLK AVE** **$283,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081500	CHAPIN ST	TAFT DR	E KENNEDY ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127440	0.0 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
127438	11.1 to 12.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
127441	29.8 to 38.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
127442	42.3 to 45.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
127443	46.5 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
127444	66.3 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
127445	96.9 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
127446	108.6 to 118.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
127447	120.5 to 124.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
127448	125.9 to 140.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
127449	141.1 to 157.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
127450	157.7 to 174.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
127451	175.8 to 195.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
127452	197.3 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
127453	217.6 to 281.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	319	SF	$120	**$38,220**
127454	281.3 to 299.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,860**
127455	299.7 to 323.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
127439	321.8 to 322.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
127456	326.1 to 328.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
127457	329.8 to 338.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
127458	340.9 to 347.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
127459	347.6 to 359.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**

TOTAL COST FOR: W *side of* **CHAPIN ST** *Starting at:* **TAFT DR** **$198,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201451	CHATOM WY	FICKLIN DR	GARY LN	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77031	0.0 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
77032	22.7 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
77029	26.3 to 27.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
77033	34.3 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
77034	60.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
77030	69.1 to 70.1 feet	**Vertical Change**	-.55"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **CHATOM WY** *Starting at:* **FICKLIN DR** **$37,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201453	CHATOM WY	GARY LN	FICKLIN DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77035	1.9 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
77036	16.6 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
77037	28.1 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
77038	41.5 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
77039	50.5 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**

TOTAL COST FOR: E *side of* **CHATOM WY** *Starting at:* **GARY LN** **$31,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271408	CHATOM WY	GARY LN	TRIVISO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111318	11.6 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
111316	12.6 to 13.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
111317	63.0 to 64.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **CHATOM WY** *Starting at:* **GARY LN** **$3,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271407	CHATOM WY	TRIVISO AVE	GARY LN	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111312	0.3 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
111313	8.3 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
111310	8.5 to 9.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
111314	59.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
111311	60.4 to 61.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
111315	66.3 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **CHATOM WY** *Starting at:* **TRIVISO AVE** **$10,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191351	CHERRY ST	KNOX RD	PEACH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74138	5.7 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,510**
74155	12.2 to 33.6 feet	Key Note Segment		5 ft	96			
74156	38.0 to 60.0 feet	Key Note Segment		5 ft	99			
74131	49.1 to 50.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
74139	61.2 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,774**
74140	81.5 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,942**
74157	89.8 to 111.3 feet	Key Note Segment		5 ft	97			
74141	111.5 to 115.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,998**
74158	115.5 to 137.4 feet	Key Note Segment		5 ft	99			
74142	137.9 to 139.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
74143	139.3 to 166.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,742**
74159	167.2 to 189.3 feet	Key Note Segment		5 ft	99			
74160	167.2 to 214.9 feet	Key Note Segment		5 ft	215			
74144	190.1 to 194.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$828**
74145	198.2 to 204.4 feet	**Cross Slope (Driveway)**	11.0-12.0%	5 ft	28	SF	$40	**$1,116**
74146	206.4 to 210.6 feet	**Cross Slope (Driveway)**	13.0-14.0%	5 ft	19	SF	$40	**$756**
74147	211.5 to 212.5 feet	**Cross Slope (Driveway)**	10.0-11.0%	5 ft	5	SF	$40	**$180**
74132	233.9 to 234.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$338**
74161	244.3 to 265.9 feet	Key Note Segment		5 ft	97			
74148	266.8 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
74162	270.0 to 292.3 feet	Key Note Segment		5 ft	100			
74133	271.2 to 272.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
74149	292.8 to 314.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
74134	312.6 to 313.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
74150	314.8 to 321.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,402**
74163	322.2 to 343.5 feet	Key Note Segment		5 ft	96			
74135	322.9 to 323.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74164	347.9 to 369.8 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191351	CHERRY ST	KNOX RD	PEACH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74151	370.4 to 371.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$234
74152	372.6 to 395.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	$12,582
74136	384.6 to 385.6 feet	Vertical Change	.38"	5 ft	5	REF		
74153	397.5 to 399.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,134
74165	399.6 to 420.2 feet	Key Note Segment		5 ft	93			
74137	419.9 to 420.9 feet	Vertical Change	-.33"	5 ft	5	REF		
74154	420.8 to 423.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,296

TOTAL COST FOR: N *side of* **CHERRY ST** *Starting at:* **KNOX RD** **$70,195.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191415	CHERRY ST	PEACH ST	KNOX ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74352	0.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,942**
74369	7.3 to 28.4 feet	Key Note Segment		5 ft	95			
74353	30.4 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74370	32.8 to 54.5 feet	Key Note Segment		5 ft	98			
74346	54.1 to 55.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
74354	55.1 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,252**
74347	66.7 to 67.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
74348	77.0 to 78.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
74371	88.9 to 110.3 feet	Key Note Segment		5 ft	96			
74349	89.7 to 90.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
74355	110.9 to 114.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,836**
74372	114.8 to 136.2 feet	Key Note Segment		5 ft	96			
74350	125.4 to 126.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
74356	137.3 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
74357	143.8 to 153.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,130**
74358	153.3 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
74359	160.3 to 166.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,186**
74373	166.2 to 187.5 feet	Key Note Segment		5 ft	96			
74351	177.0 to 178.0 feet	**Vertical Change**	-.4"	5 ft	5	REF		
74360	188.8 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
74374	192.0 to 213.3 feet	Key Note Segment		5 ft	96			
74361	216.3 to 227.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,994**
74362	229.8 to 247.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,504**
74375	247.6 to 272.5 feet	Key Note Segment		5 ft	112			
74376	273.8 to 295.7 feet	Key Note Segment		5 ft	99			
74363	296.9 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
74364	302.7 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
74365	308.3 to 329.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,448**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191415	CHERRY ST	PEACH ST	KNOX ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74377	329.5 to 351.0 feet	Key Note Segment		5 ft	97			
74366	352.2 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
74378	355.3 to 377.9 feet	Key Note Segment		5 ft	102			
74367	380.0 to 383.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
74368	388.8 to 390.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**

TOTAL COST FOR: S *side of* **CHERRY ST** *Starting at:* **PEACH ST** **$71,604.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110944	CHERRY TREE DR	BERRY DR	GRANADA DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90145	16.3 to 37.4 feet	Key Note Segment		5 ft	106			
90111	27.7 to 28.7 feet	Vertical Change	.31"	5 ft	5	REF		
90120	67.2 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
90121	73.4 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,820
90122	90.7 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
90123	97.6 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
90112	100.5 to 101.5 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375
90146	101.8 to 121.7 feet	Key Note Segment		5 ft	100			
90124	122.4 to 123.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$280
90125	129.8 to 135.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
90126	140.5 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
90113	143.7 to 144.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
90147	145.3 to 165.0 feet	Key Note Segment		5 ft	98			
90127	165.8 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
90148	171.2 to 190.7 feet	Key Note Segment		5 ft	98			
90128	191.3 to 193.4 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	11	SF	$40	$420
90129	200.3 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
90130	221.3 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
90149	231.8 to 250.9 feet	Key Note Segment		5 ft	96			
90114	241.2 to 242.2 feet	Vertical Change	.34"	5 ft	5	REF		
90131	254.9 to 257.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
90150	257.5 to 276.6 feet	Key Note Segment		5 ft	96			
90132	277.4 to 279.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	$440
90133	293.7 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
90134	308.6 to 316.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
90115	316.1 to 317.1 feet	Vertical Change	.27"	5 ft	5	REF		
90151	317.4 to 336.4 feet	Key Note Segment		5 ft	95			
90116	327.1 to 328.1 feet	Vertical Change	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110944	CHERRY TREE DR	BERRY DR	GRANADA DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90135	341.7 to 343.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
90152	343.5 to 362.0 feet	Key Note Segment		5 ft	93			
90136	362.8 to 365.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
90137	365.2 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
90138	384.6 to 385.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
90139	385.7 to 389.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
90140	393.6 to 395.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
90141	399.5 to 401.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90153	402.6 to 423.2 feet	Key Note Segment		5 ft	103			
90117	413.5 to 414.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
90118	424.3 to 425.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
90142	424.9 to 427.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
90154	429.3 to 449.5 feet	Key Note Segment		5 ft	101			
90143	450.3 to 452.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
90119	450.5 to 451.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
90144	466.0 to 470.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: S *side of* **CHERRY TREE DR** *Starting at:* **BERRY DR** **$53,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110946	CHERRY TREE DR	GRANADA DR	TOSCHI DR	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90156	0.0 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
90157	7.8 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
90158	16.7 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
90155	19.9 to 20.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
90159	26.8 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
90160	53.4 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
90161	64.5 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **CHERRY TREE DR** *Starting at:* **GRANADA DR** **$30,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221052	CHERRY TREE DR	HAZELNUT DR	PEACH TREE DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81085	0.6 to 2.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
81086	2.0 to 4.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
81067	3.8 to 4.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
81087	4.4 to 8.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	18	SF	$120	**$2,160**
81088	8.8 to 17.0 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	41	SF	$120	**$4,920**
81068	10.4 to 11.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81089	23.3 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
81069	30.9 to 31.9 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
81090	37.8 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81133	50.2 to 71.1 feet	Key Note Segment		5 ft	104			
81070	67.9 to 68.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
81071	70.6 to 71.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81091	71.1 to 74.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$620**
81092	76.3 to 80.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
81134	82.0 to 101.7 feet	Key Note Segment		5 ft	99			
81072	91.9 to 92.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
81093	101.8 to 111.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	48	SF	$40	**$1,920**
81094	113.7 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
81095	120.8 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
81074	144.1 to 145.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81135	146.0 to 165.6 feet	Key Note Segment		5 ft	98			
81096	166.1 to 171.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	28	SF	$40	**$1,120**
81136	171.7 to 194.5 feet	Key Note Segment		5 ft	114			
81075	172.2 to 173.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
81076	190.3 to 191.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
81097	194.5 to 213.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	93	SF	$40	**$3,700**
81077	199.3 to 200.3 feet	**Vertical Change**	-.52"	5 ft	5	REF		
81098	214.0 to 224.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	52	SF	$120	**$6,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221052	CHERRY TREE DR	HAZELNUT DR	PEACH TREE DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81078	224.3 to 225.3 feet	Vertical Change	.29"	5 ft	5	REF		
81099	224.4 to 226.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,020
81100	226.3 to 230.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	$2,700
81101	232.5 to 234.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
81137	235.6 to 256.3 feet	Key Note Segment		5 ft	104			
81102	256.7 to 263.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
81138	263.8 to 284.5 feet	Key Note Segment		5 ft	104			
81103	285.6 to 286.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
81104	289.3 to 293.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
81105	296.3 to 298.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
81106	298.3 to 302.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,460
81107	303.2 to 304.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
81108	307.6 to 326.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	$11,580
81139	327.3 to 348.5 feet	Key Note Segment		5 ft	106			
81079	346.7 to 347.7 feet	Vertical Change	2.68"	5 ft	5	REF		
81109	348.5 to 350.2 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	9	SF	$40	$340
81110	350.6 to 352.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
81111	354.3 to 362.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
81112	365.2 to 369.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
81140	369.8 to 393.1 feet	Key Note Segment		5 ft	117			
81080	373.7 to 374.7 feet	Vertical Change	.29"	5 ft	5	REF		
81113	395.5 to 397.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
81114	400.7 to 415.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,120
81115	418.7 to 437.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	$11,280
81116	440.8 to 443.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
81117	443.6 to 448.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
81118	466.4 to 471.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
81081	480.5 to 481.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221052	CHERRY TREE DR	HAZELNUT DR	PEACH TREE DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81119	485.8 to 489.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81120	497.0 to 501.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
81121	521.1 to 527.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
81082	523.4 to 524.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
81122	539.5 to 545.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
81123	556.3 to 558.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
81124	576.0 to 577.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81125	601.8 to 610.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
81126	611.3 to 616.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
81127	617.0 to 631.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
81128	647.0 to 650.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81141	664.8 to 689.1 feet	Key Note Segment		5 ft	122			
81083	682.9 to 683.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
81129	696.7 to 712.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
81142	712.6 to 733.3 feet	Key Note Segment		5 ft	104			
81130	734.3 to 742.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
81143	742.7 to 763.4 feet	Key Note Segment		5 ft	104			
81131	766.6 to 771.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
81132	771.8 to 784.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**

TOTAL COST FOR: S/E/N *side of* **CHERRY TREE DR** *Starting at:* **HAZELNUT DR** **$177,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221125	CHERRY TREE DR	LEMON TREE DR	HAZELNUT DR	19

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81456	2.4 to 40.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	188	SF	$120	**$22,560**
81457	40.4 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
81458	49.1 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
81459	56.8 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
81460	73.7 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
81461	83.3 to 84.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
81462	85.3 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
81463	89.8 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
81464	98.8 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
81465	104.8 to 120.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
81466	123.5 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**
81467	149.3 to 150.8 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **CHERRY TREE DR** *Starting at:* **LEMON TREE DR** **$72,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110926	CHERRY TREE DR	TOSCHI DR	BERRY DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89914	0.2 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
89915	12.2 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
89933	21.3 to 39.8 feet	Key Note Segment		5 ft	92			
89916	45.3 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
89905	45.6 to 46.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
89934	47.0 to 65.5 feet	Key Note Segment		5 ft	93			
89917	73.7 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
89918	83.6 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
89919	91.9 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
89906	93.9 to 94.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
89920	99.5 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
89935	107.9 to 125.3 feet	Key Note Segment		5 ft	87			
89907	116.7 to 117.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
89921	126.0 to 128.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
89922	128.4 to 130.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
89923	131.6 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
89936	133.6 to 151.7 feet	Key Note Segment		5 ft	90			
89908	142.5 to 143.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
89924	151.7 to 156.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	22	SF	$40	**$880**
89925	156.1 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
89926	163.1 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
89927	166.9 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
89928	172.2 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89929	178.1 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89937	194.4 to 212.2 feet	Key Note Segment		5 ft	89			
89909	203.1 to 204.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
89930	214.1 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
89938	220.0 to 238.3 feet	Key Note Segment		5 ft	92			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110926	CHERRY TREE DR	TOSCHI DR	BERRY DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89910	229.2 to 230.2 feet	Vertical Change	.26"	5 ft	5	REF		
89911	240.5 to 241.5 feet	Vertical Change	-.59"	5 ft	5	SF	$75	$375
89931	243.6 to 245.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
89912	250.7 to 251.7 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
89932	253.5 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
89939	256.9 to 260.2 feet		5.0-6.0%	5 ft	17			
89940	256.9 to 260.2 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	$1,980
89913	260.3 to 261.3 feet	Vertical Change	.74"	5 ft	5	SF	$75	$375

TOTAL COST FOR: N *side of* **CHERRY TREE DR** *Starting at:* **TOSCHI DR** **$38,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281202	CHESTNUT AVE	1316 CHESTNUT AVE	1316 CHESTNUT AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112586	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
112589	2.3 to 20.4 feet	Key Note Segment		5 ft	90			
112587	23.0 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112588	26.1 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **CHESTNUT AVE** *Starting at:* **1316 CHESTNUT AVE** **$2,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281201	CHESTNUT AVE	527 MACADAMIA AVE	FILBERT ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112578	0.2 to 15.4 feet	Key Note Segment		5 ft	76			
112565	18.1 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
112566	48.3 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
112558	54.1 to 55.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112567	54.8 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
112579	66.6 to 85.5 feet	Key Note Segment		5 ft	95			
112568	87.5 to 92.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
112580	93.3 to 112.0 feet	Key Note Segment		5 ft	94			
112569	114.1 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
112570	156.1 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
112581	162.6 to 181.9 feet	Key Note Segment		5 ft	97			
112559	172.6 to 173.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
112571	183.3 to 187.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
112560	185.8 to 186.8 feet	**Vertical Change**	.82"	5 ft	5	REF		
112582	188.9 to 208.1 feet	Key Note Segment		5 ft	96			
112572	209.5 to 212.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
112573	212.7 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
112574	226.2 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
112561	233.0 to 234.0 feet	**Vertical Change**	-.49"	5 ft	5	REF		
112583	258.1 to 278.2 feet	Key Note Segment		5 ft	100			
112562	259.0 to 260.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
112563	278.1 to 279.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112575	279.3 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
112584	283.9 to 303.6 feet	Key Note Segment		5 ft	99			
112564	303.7 to 304.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112576	305.7 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
112577	313.0 to 332.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
112585	341.1 to 364.8 feet	Key Note Segment		5 ft	119			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281201	CHESTNUT AVE	527 MACADAMIA AVE	FILBERT ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **CHESTNUT AVE**	*Starting at:* **527 MACADAMIA AVE**					**$85,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281213	CHESTNUT AVE	ACORN CT	CASHEW CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112666	0.0 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
112667	16.3 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	**$18,360**
112668	46.9 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
112669	62.2 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
112670	84.1 to 91.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
112671	94.5 to 113.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	97	SF	$120	**$11,580**
112664	100.6 to 101.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
112672	114.1 to 139.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,180**

TOTAL COST FOR: S *side of* **CHESTNUT AVE** *Starting at:* **ACORN CT** **$76,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281220	CHESTNUT AVE	CASHEW CT	WATT ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112708	0.1 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
112709	9.0 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
112710	14.8 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
112711	41.4 to 46.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
112712	49.6 to 52.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
112713	52.4 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
112714	58.8 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **CHESTNUT AVE** *Starting at:* **CASHEW CT** **$30,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281029	CHESTNUT AVE	CHESTNUT AVE	MACADAMIA AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111985	0.0 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
111986	7.3 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$17,100**
111980	7.9 to 8.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
111987	35.8 to 57.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	108	SF	$120	**$12,900**
111988	58.8 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
111981	59.6 to 60.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
111989	64.8 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
111990	107.3 to 111.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
111982	111.2 to 112.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
111991	111.9 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111992	116.3 to 125.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
111993	127.2 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
111984	136.8 to 137.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **CHESTNUT AVE** *Starting at:* **CHESTNUT AVE** **$75,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281207	CHESTNUT AVE	FILBERT ST	ACORN CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112613	2.3 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
112617	7.5 to 23.1 feet	Key Note Segment		5 ft	78			
112614	26.0 to 30.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
112615	31.6 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**
112616	68.2 to 74.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
112612	75.0 to 76.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **CHESTNUT AVE** *Starting at:* **FILBERT ST** **$30,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281027	CHESTNUT AVE	HICKORY AVE	FILBERT ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111930	0.0 to 19.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,400**
111906	10.2 to 11.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
111931	19.6 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111966	22.4 to 42.0 feet	Key Note Segment		5 ft	98			
111907	22.8 to 23.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
111908	38.7 to 39.7 feet	**Vertical Change**	3.34"	5 ft	5	REF		
111932	46.1 to 49.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
111967	49.3 to 67.8 feet	Key Note Segment		5 ft	93			
111933	72.7 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
111934	75.0 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
111935	89.3 to 104.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
111936	104.8 to 106.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
111909	106.4 to 107.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
111937	109.6 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
111938	123.7 to 128.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
111968	128.6 to 148.4 feet	Key Note Segment		5 ft	99			
111910	139.4 to 140.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
111911	143.5 to 149.8 feet	**Vertical Change**	.33"	5 ft	32	REF		
111939	151.3 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
111969	154.8 to 174.3 feet	Key Note Segment		5 ft	97			
111912	154.9 to 155.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
111940	176.3 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
111941	207.2 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
111942	214.1 to 228.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
111943	230.3 to 235.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
111970	235.2 to 254.8 feet	Key Note Segment		5 ft	98			
111913	255.6 to 256.6 feet	**Vertical Change**	1.22"	5 ft	5	REF		
111944	255.8 to 260.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281027	CHESTNUT AVE	HICKORY AVE	FILBERT ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111971	261.7 to 280.8 feet	Key Note Segment		5 ft	96			
111914	262.1 to 263.1 feet	Vertical Change	1.74"	5 ft	5	REF		
111915	280.3 to 281.3 feet	Vertical Change	-.35"	5 ft	5	REF		
111945	287.8 to 297.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
111946	297.4 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111947	301.8 to 309.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
111979	309.1 to 310.1 feet	Protruding Object	36"	5 ft	5	JOB	$99	**$99**
111948	312.4 to 313.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
111916	316.7 to 317.7 feet	Vertical Change	-.31"	5 ft	5	REF		
111949	316.8 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
111972	331.8 to 350.7 feet	Key Note Segment		5 ft	95			
111950	353.0 to 357.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
111951	358.3 to 365.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
111917	364.7 to 365.7 feet	Vertical Change	-.28"	5 ft	5	REF		
111973	367.4 to 387.5 feet	Key Note Segment		5 ft	101			
111918	385.5 to 386.5 feet	Vertical Change	.31"	5 ft	5	REF		
111952	389.8 to 414.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	123	SF	$120	**$14,760**
111953	414.4 to 416.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
111954	416.8 to 438.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
111955	441.1 to 444.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
111974	448.5 to 468.3 feet	Key Note Segment		5 ft	99			
111919	458.0 to 459.0 feet	Vertical Change	.48"	5 ft	5	REF		
111956	473.0 to 474.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
111975	474.8 to 492.5 feet	Key Note Segment		5 ft	89			
111957	495.1 to 507.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
111958	510.3 to 553.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,160**
111976	554.3 to 574.3 feet	Key Note Segment		5 ft	100			
111922	554.9 to 555.9 feet	Vertical Change	.94"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281027	CHESTNUT AVE	HICKORY AVE	FILBERT ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111923	564.1 to 565.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
111924	574.4 to 575.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
111959	575.7 to 580.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
111925	577.5 to 578.5 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
111977	580.7 to 599.9 feet	Key Note Segment		5 ft	96			
111926	590.1 to 591.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
111927	600.3 to 601.3 feet	**Vertical Change**	.89"	5 ft	5	REF		
111960	601.3 to 620.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,220**
111961	620.0 to 632.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,740**
111928	627.0 to 628.0 feet	**Vertical Change**	.55"	5 ft	5	REF		
111978	632.9 to 652.8 feet	Key Note Segment		5 ft	99			
111929	653.4 to 654.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
111962	654.7 to 656.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
111963	661.9 to 664.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111964	667.1 to 671.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
111965	671.0 to 673.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: N *side of* **CHESTNUT AVE** *Starting at:* **HICKORY AVE** **$195,714.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281012	CHESTNUT AVE	WATT ST	HICKORY AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111804	2.2 to 3.2 feet	Vertical Change	.4"	5 ft	5	REF		
111811	2.3 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,380
111812	9.6 to 16.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	35	SF	$120	$4,200
111813	19.2 to 21.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	$1,260
111814	21.3 to 34.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	$7,800
111826	35.3 to 55.4 feet	Key Note Segment		5 ft	101			
111805	52.9 to 53.9 feet	Vertical Change	.26"	5 ft	5	REF		
111815	55.5 to 60.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	$3,000
111827	61.5 to 81.3 feet	Key Note Segment		5 ft	99			
111806	63.2 to 64.2 feet	Vertical Change	.33"	5 ft	5	REF		
111807	81.1 to 82.1 feet	Vertical Change	.48"	5 ft	5	REF		
111816	84.3 to 91.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,140
111817	94.0 to 96.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,680
111818	99.0 to 113.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	$8,400
111819	114.4 to 122.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	42	SF	$120	$5,040
111808	119.2 to 120.2 feet	Vertical Change	.83"	5 ft	5	REF		
111820	123.1 to 149.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	134	SF	$120	$16,020
111809	123.6 to 124.6 feet	Vertical Change	-.28"	5 ft	5	REF		
111821	149.8 to 164.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	$8,640
111828	166.1 to 185.2 feet	Key Note Segment		5 ft	96			
111810	171.8 to 172.8 feet	Vertical Change	.62"	5 ft	5	REF		
111822	188.2 to 191.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
111823	192.5 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
111829	197.6 to 228.4 feet	Key Note Segment		5 ft	154			
111824	230.2 to 232.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
111825	235.8 to 241.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600

TOTAL COST FOR: S *side of* **CHESTNUT AVE** *Starting at:* **WATT ST** **$70,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111502	CHIANTI AVE	3059 MERLOT AVE	3155 CHIANTI AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92949	0.0 to 10.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
92950	13.0 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
92951	19.3 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
92952	24.3 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
92966	41.8 to 61.2 feet	Key Note Segment		5 ft	97			
92942	51.5 to 52.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
92953	63.6 to 68.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
92967	69.4 to 89.4 feet	Key Note Segment		5 ft	100			
92954	90.5 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
92955	97.8 to 130.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**
92956	141.8 to 149.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
92968	149.5 to 169.0 feet	Key Note Segment		5 ft	98			
92957	170.5 to 177.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
92969	177.2 to 196.9 feet	Key Note Segment		5 ft	99			
92958	197.8 to 215.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
92959	217.3 to 257.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	202	SF	$120	**$24,180**
92944	221.2 to 222.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
92970	258.3 to 277.8 feet	Key Note Segment		5 ft	98			
92960	279.2 to 282.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
92961	282.3 to 285.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
92971	286.0 to 305.3 feet	Key Note Segment		5 ft	97			
92945	296.5 to 297.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
92962	307.9 to 336.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$16,980**
92946	325.6 to 326.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
92963	336.3 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
92964	360.3 to 366.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
92972	366.3 to 385.7 feet	Key Note Segment		5 ft	97			
92947	371.0 to 372.0 feet	**Vertical Change**	.62"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111502	CHIANTI AVE	3059 MERLOT AVE	3155 CHIANTI AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92948	376.3 to 377.3 feet	Vertical Change	.68"	5 ft	5	REF		
92965	386.7 to 387.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: N *side of* **CHIANTI AVE** *Starting at:* **3059 MERLOT AVE** **$132,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111504	CHIANTI AVE	3169 CHIANTI AVE	S TIMBERLINE DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92976	0.0 to 57.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	285	SF	$120	**$34,200**
92980	57.5 to 77.7 feet	Key Note Segment		5 ft	101			
92973	58.3 to 59.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
92974	67.4 to 68.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
92977	81.0 to 82.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
92981	85.6 to 104.9 feet	Key Note Segment		5 ft	97			
92978	105.5 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
92979	111.1 to 127.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
92982	124.3 to 126.4 feet		5.0-6.0%	5 ft	11			
92983	124.3 to 126.4 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
92975	126.8 to 127.8 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **CHIANTI AVE** *Starting at:* **3169 CHIANTI AVE** **$48,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111057	CHIANTI AVE	GRENACHE AVE	PETITE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90845	2.4 to 23.3 feet	Key Note Segment		5 ft	105			
90785	40.8 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90846	42.4 to 57.3 feet	Key Note Segment		5 ft	75			
90760	50.8 to 51.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
90786	57.3 to 60.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$620**
90787	61.1 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
90761	68.8 to 69.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
90788	70.9 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
90789	93.4 to 103.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
90790	103.8 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90847	105.3 to 120.6 feet	Key Note Segment		5 ft	77			
90791	120.6 to 123.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	14	SF	$40	**$540**
90792	124.6 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
90762	134.5 to 135.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
90793	134.9 to 137.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
90794	139.9 to 143.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
90848	144.8 to 159.0 feet	Key Note Segment		5 ft	71			
90795	166.0 to 170.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
90796	170.6 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
90797	181.0 to 182.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
90798	184.8 to 188.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
90799	188.3 to 191.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
90800	192.7 to 202.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
90801	203.7 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90802	215.0 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90803	218.6 to 220.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
90804	222.5 to 227.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90849	227.0 to 241.4 feet	Key Note Segment		5 ft	72			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111057	CHIANTI AVE	GRENACHE AVE	PETITE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90805	242.0 to 248.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
90806	248.9 to 261.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
90850	264.0 to 280.8 feet	Key Note Segment		5 ft	84			
90764	264.7 to 265.7 feet	**Vertical Change**	.62"	5 ft	5	REF		
90767	282.0 to 283.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
90807	283.0 to 284.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90768	289.3 to 293.3 feet	**Vertical Change**	.28"	5 ft	20	LF	$75	**$1,500**
90808	299.5 to 307.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
90809	312.8 to 332.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
90769	316.4 to 317.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
90851	332.4 to 346.8 feet	Key Note Segment		5 ft	72			
90810	354.0 to 357.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
90811	357.3 to 358.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90812	363.3 to 364.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
90813	364.5 to 369.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
90852	369.3 to 383.7 feet	Key Note Segment		5 ft	72			
90770	384.1 to 385.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
90814	387.1 to 390.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
90815	392.8 to 413.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
90816	415.6 to 416.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90817	420.3 to 421.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90771	431.8 to 432.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
90818	431.8 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90772	434.6 to 435.6 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
90853	435.2 to 450.1 feet	Key Note Segment		5 ft	75			
90819	450.1 to 453.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
90820	456.0 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90773	459.1 to 460.1 feet	**Vertical Change**	2.92"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111057	CHIANTI AVE	GRENACHE AVE	PETITE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90821	463.7 to 468.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
90854	468.1 to 483.1 feet	Key Note Segment		5 ft	75			
90774	471.8 to 472.8 feet	**Vertical Change**	.91"	5 ft	5	REF		
90775	483.4 to 484.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
90822	484.2 to 485.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90823	489.1 to 504.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
90824	504.9 to 508.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
90776	505.6 to 506.6 feet	**Vertical Change**	2.64"	5 ft	5	REF		
90825	524.8 to 528.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
90826	531.6 to 535.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
90855	535.7 to 549.3 feet	Key Note Segment		5 ft	68			
90777	536.3 to 537.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
90827	549.7 to 551.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
90778	550.5 to 551.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
90828	552.7 to 564.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
90779	559.0 to 560.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
90829	566.5 to 569.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
90856	570.7 to 584.3 feet	Key Note Segment		5 ft	68			
90780	571.4 to 572.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
90781	578.0 to 579.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
90830	584.4 to 588.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
90831	590.8 to 593.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
90832	593.7 to 594.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
90833	597.4 to 598.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
90834	601.1 to 603.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
90782	602.2 to 603.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
90835	605.0 to 620.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
90836	620.7 to 624.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111057	CHIANTI AVE	GRENACHE AVE	PETITE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90837	627.1 to 635.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
90857	636.3 to 650.9 feet	Key Note Segment		5 ft	73			
90838	650.9 to 652.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
90839	655.0 to 665.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
90783	665.5 to 666.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
90840	666.0 to 673.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
90858	674.8 to 690.3 feet	Key Note Segment		5 ft	78			
90841	690.8 to 692.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
90842	693.4 to 694.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
90843	694.8 to 697.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
90844	725.5 to 728.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
90859	728.3 to 743.3 feet	Key Note Segment		5 ft	75			
90784	736.9 to 737.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **CHIANTI AVE** *Starting at:* **GRENACHE AVE** **$175,045.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111110	CHIANTI AVE	PETITE AVE	GRENACHE AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90969	0.0 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
90970	2.8 to 9.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
90950	5.7 to 6.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
91018	20.3 to 21.5 feet		5.0-6.0%	5 ft	6			
90951	24.4 to 27.3 feet	**Vertical Change**	.47"	5 ft	15	LF	$75	**$1,088**
91019	25.6 to 27.0 feet		5.0-6.0%	5 ft	7			
90952	33.1 to 34.1 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
90953	58.8 to 59.8 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
90971	61.2 to 67.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
90954	67.3 to 68.3 feet	**Vertical Change**	-1.85"	5 ft	5	REF		
90972	68.2 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90973	74.3 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
90955	85.2 to 86.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
91009	110.7 to 126.1 feet	Key Note Segment		5 ft	77			
90956	111.9 to 112.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
90957	134.2 to 135.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
90974	135.6 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
90975	144.8 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
91010	146.9 to 163.0 feet	Key Note Segment		5 ft	81			
90976	164.3 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
90958	174.5 to 175.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
90977	178.0 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
90978	189.6 to 193.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
90979	196.7 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
90980	212.3 to 214.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
90959	214.5 to 215.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
91011	215.3 to 229.9 feet	Key Note Segment		5 ft	73			
90981	229.9 to 233.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111110	CHIANTI AVE	PETITE AVE	GRENACHE AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90982	235.3 to 238.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90983	241.8 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
91012	247.4 to 262.6 feet	Key Note Segment		5 ft	76			
90960	263.2 to 264.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
90961	265.5 to 266.5 feet	**Vertical Change**	2.97"	5 ft	5	SF	$75	**$375**
90984	272.7 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90985	277.4 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
90986	287.4 to 288.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
90987	291.9 to 293.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
90988	297.3 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90989	315.1 to 319.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
91013	320.5 to 336.4 feet	Key Note Segment		5 ft	80			
90990	336.4 to 340.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	20	SF	$40	**$780**
90991	342.5 to 344.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
90962	343.5 to 344.5 feet	**Vertical Change**	-.6"	5 ft	5	REF		
90992	344.7 to 348.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
90993	352.3 to 353.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90994	359.9 to 365.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
90995	368.4 to 371.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
91014	374.3 to 388.3 feet	Key Note Segment		5 ft	70			
90996	391.7 to 404.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
90997	407.0 to 409.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
90998	412.2 to 414.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
90963	415.2 to 416.2 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
90999	417.3 to 425.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
91015	426.1 to 440.8 feet	Key Note Segment		5 ft	74			
90964	433.8 to 434.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
91000	444.9 to 450.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111110	CHIANTI AVE	PETITE AVE	GRENACHE AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91016	453.8 to 467.7 feet	Key Note Segment		5 ft	70			
90965	461.4 to 462.4 feet	**Vertical Change**	.57"	5 ft	5	REF		
91001	468.5 to 470.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
91017	522.0 to 536.5 feet	Key Note Segment		5 ft	73			
90967	522.8 to 523.8 feet	**Vertical Change**	-.75"	5 ft	5	REF		
90968	537.0 to 538.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
91002	545.8 to 547.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
91003	549.6 to 570.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
91004	575.8 to 586.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
91005	592.3 to 599.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
91006	601.1 to 612.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
91007	615.3 to 619.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
91008	625.2 to 633.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: N *side of* **CHIANTI AVE** *Starting at:* **PETITE AVE** **$119,707.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111317	CHIANTI AVE	S DOUBLE TREE WAY	S WOLFTRAP ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91884	0.6 to 1.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
91875	1.4 to 2.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
91885	2.4 to 7.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
91886	7.8 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
91887	10.2 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
91876	18.8 to 19.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
91902	21.1 to 40.6 feet	Key Note Segment		5 ft	98			
91877	22.0 to 23.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
91878	40.0 to 41.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
91888	42.3 to 48.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
91903	48.3 to 68.8 feet	Key Note Segment		5 ft	103			
91879	58.8 to 59.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
91889	70.4 to 84.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,580**
91890	87.2 to 103.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
91891	104.3 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
91892	123.3 to 126.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
91904	128.9 to 149.3 feet	Key Note Segment		5 ft	102			
91880	148.6 to 152.1 feet	**Vertical Change**	.44"	5 ft	18	REF		
91893	149.9 to 155.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
91905	156.7 to 176.6 feet	Key Note Segment		5 ft	100			
91894	179.1 to 187.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
91895	187.4 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	230	SF	$120	**$27,540**
91881	188.1 to 189.1 feet	**Vertical Change**	.69"	5 ft	5	REF		
91882	212.9 to 213.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
91896	233.3 to 236.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
91906	236.7 to 255.8 feet	Key Note Segment		5 ft	96			
91883	246.5 to 247.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
91897	256.0 to 263.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	39	SF	$40	**$1,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111317	CHIANTI AVE	S DOUBLE TREE WAY	S WOLFTRAP ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91907	263.8 to 291.3 feet	Key Note Segment		5 ft	138			
91898	292.1 to 296.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
91899	297.3 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
91900	304.0 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
91901	309.3 to 314.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: S *side of* **CHIANTI AVE** *Starting at:* **S DOUBLE TREE WAY** **$92,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111310	CHIANTI AVE	S TIMBERLINE DR	S DOUBLE TREE WAY	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91796	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
91820	2.0 to 20.7 feet	Key Note Segment		5 ft	94			
91797	21.5 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91821	29.5 to 46.9 feet	Key Note Segment		5 ft	87			
91782	32.0 to 33.0 feet	**Vertical Change**	3.14"	5 ft	5	REF		
91783	46.6 to 47.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
91798	47.5 to 52.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
91799	52.0 to 59.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
91800	62.0 to 63.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
91801	65.8 to 72.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
91802	74.6 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91803	78.4 to 85.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,500**
91784	84.0 to 85.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
91804	87.3 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
91805	99.9 to 107.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
91822	108.3 to 128.0 feet	Key Note Segment		5 ft	99			
91785	131.2 to 132.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
91806	131.2 to 135.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
91823	135.8 to 155.1 feet	Key Note Segment		5 ft	96			
91786	145.0 to 146.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
91787	151.7 to 152.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
91788	156.0 to 157.0 feet	**Vertical Change**	.58"	5 ft	5	REF		
91807	156.0 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
91808	162.9 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
91809	181.8 to 206.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
91789	203.4 to 204.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
91810	206.8 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
91824	216.4 to 236.7 feet	Key Note Segment		5 ft	102			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111310	CHIANTI AVE	S TIMBERLINE DR	S DOUBLE TREE WAY	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91790	218.8 to 219.8 feet	Vertical Change	.63"	5 ft	5	REF		
91811	239.7 to 243.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
91825	244.7 to 264.1 feet	Key Note Segment		5 ft	97			
91791	253.1 to 254.1 feet	Vertical Change	.26"	5 ft	5	REF		
91812	267.8 to 272.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$2,940
91813	276.3 to 299.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	114	SF	$120	$13,620
91814	301.8 to 307.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
91815	310.0 to 317.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,380
91826	318.6 to 343.7 feet	Key Note Segment		5 ft	125			
91792	331.3 to 332.3 feet	Vertical Change	.29"	5 ft	5	REF		
91793	340.7 to 344.2 feet	Vertical Change	.34"	5 ft	18	REF		
91816	344.3 to 350.8 feet	Cross Slope (Driveway)	9.0-10.0%	5 ft	33	SF	$40	$1,300
91827	352.6 to 372.3 feet	Key Note Segment		5 ft	99			
91794	353.2 to 354.2 feet	Vertical Change	-.75"	5 ft	5	REF		
91817	372.3 to 375.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	18	SF	$40	$720
91818	375.9 to 393.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,500
91795	376.4 to 377.4 feet	Vertical Change	.36"	5 ft	5	REF		
91819	393.4 to 394.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
91828	394.1 to 396.4 feet		5.0-6.0%	5 ft	12			
91829	394.1 to 396.4 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	$1,380

TOTAL COST FOR: S *side of* **CHIANTI AVE** *Starting at:* **S TIMBERLINE DR** **$111,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111459	CHIANTI AVE	S WOLFTRAP ST	3059 MERLOT AVE	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92932	1.8 to 20.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
92939	20.3 to 39.6 feet	Key Note Segment		5 ft	97			
92933	41.0 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
92934	64.7 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
92940	74.4 to 93.3 feet	Key Note Segment		5 ft	94			
92935	94.7 to 100.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
92936	100.8 to 102.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
92941	102.9 to 122.4 feet	Key Note Segment		5 ft	98			
92937	123.3 to 124.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
92938	127.7 to 134.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: N *side of* **CHIANTI AVE** *Starting at:* **S WOLFTRAP ST** **$38,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110210916	CHIANTI CT	SANTA BONITA ST	SANTA BONITA ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78239	1.7 to 6.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,880**
78227	5.5 to 6.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
78240	11.0 to 18.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
78257	18.9 to 38.5 feet	Key Note Segment		5 ft	98			
78228	19.4 to 20.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
78229	38.1 to 39.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
78241	39.5 to 40.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
78242	41.5 to 48.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
78230	46.3 to 47.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
78243	53.7 to 55.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
78258	56.3 to 76.7 feet	Key Note Segment		5 ft	102			
78231	57.0 to 58.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
78244	77.7 to 90.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
78245	92.1 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
78246	100.4 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
78247	124.2 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
78232	127.6 to 128.6 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
78248	143.7 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
78259	145.3 to 166.8 feet	Key Note Segment		5 ft	107			
78249	167.6 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
78250	175.3 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
78260	179.3 to 200.4 feet	Key Note Segment		5 ft	106			
78233	190.4 to 191.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
78234	200.1 to 201.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
78251	206.7 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
78252	219.1 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
78253	247.0 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
78235	249.7 to 250.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110210916	CHIANTI CT	SANTA BONITA ST	SANTA BONITA ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78254	256.6 to 273.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
78261	274.4 to 294.3 feet	Key Note Segment		5 ft	100			
78255	296.4 to 309.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
78236	305.8 to 306.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
78262	309.0 to 329.8 feet	Key Note Segment		5 ft	104			
78256	335.8 to 349.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
78237	342.8 to 343.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
78238	348.1 to 349.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
78263	348.2 to 349.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S/E/N *side of* **CHIANTI CT** *Starting at:* **SANTA BONITA ST** **$73,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201048	CITRUS WAY	SAN DIEGO AVE	SAN JOSE AVE	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104632	10.5 to 30.3 feet	Key Note Segment		5 ft	99			
104623	11.0 to 12.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
104624	20.7 to 21.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
104629	31.3 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
104633	37.4 to 57.3 feet	Key Note Segment		5 ft	100			
104625	57.2 to 58.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104630	58.4 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
104626	87.4 to 88.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
104634	102.8 to 122.1 feet	Key Note Segment		5 ft	97			
104627	122.7 to 123.7 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
104635	130.4 to 149.8 feet	Key Note Segment		5 ft	97			
104628	140.7 to 141.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
104631	152.9 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **CITRUS WAY** *Starting at:* **SAN DIEGO AVE** **$2,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201050	CITRUS WAY	SAN JOSE AVE	SAN DIEGO AVE	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104637	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
104638	2.8 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	251	SF	$120	**$30,060**
104639	56.9 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	272	SF	$120	**$32,640**
104640	114.8 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
104641	120.7 to 122.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
104636	122.8 to 123.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **CITRUS WAY** *Starting at:* **SAN JOSE AVE** **$69,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131412	CLAREMONT DR	825 CLAREMONT DR	UNIVERSITY AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98216	0.3 to 10.2 feet	Key Note Segment		5 ft	49			
98200	17.6 to 18.6 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
98206	23.1 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
98201	23.6 to 24.6 feet	Vertical Change	-.37"	5 ft	5	REF		
98207	24.3 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
98202	33.5 to 34.5 feet	Vertical Change	.8"	5 ft	5	SF	$75	$375
98208	42.2 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
98203	48.0 to 49.0 feet	Vertical Change	.62"	5 ft	5	SF	$75	$375
98204	59.3 to 60.3 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
98209	63.2 to 72.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	$5,700
98210	72.7 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
98211	80.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
98212	86.1 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
98205	86.6 to 87.6 feet	Vertical Change	.33"	5 ft	5	REF		
98213	90.6 to 93.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
98214	93.9 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
98215	108.7 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
98217	109.4 to 111.2 feet		5.0-6.0%	5 ft	9			
98218	111.7 to 112.7 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: E *side of* **CLAREMONT DR** *Starting at:* **825 CLAREMONT DR** **$25,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131410	CLAREMONT DR	UNIVERSITY AVE	824 CLAREMONT DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98188	5.9 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
98189	10.9 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
98190	20.4 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
98180	23.1 to 24.1 feet	**Vertical Change**	2.04"	5 ft	5	REF		
98181	48.1 to 49.1 feet	**Vertical Change**	2.85"	5 ft	5	SF	$75	**$375**
98182	57.6 to 58.6 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
98191	61.8 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
98192	69.8 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
98185	74.8 to 75.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
98193	79.7 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
98194	84.9 to 89.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
98195	90.0 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
98186	92.9 to 93.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
98196	96.1 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
98197	99.6 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
98199	113.8 to 129.9 feet	Key Note Segment		5 ft	81			
98187	114.9 to 115.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
98198	129.9 to 132.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$500**

TOTAL COST FOR: W *side of* **CLAREMONT DR** *Starting at:* **UNIVERSITY AVE** **$31,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091528	CLINTON ST	1633 CLINTON ST	TOZER ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130585	20.3 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
130586	26.9 to 37.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
130582	38.8 to 39.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
130583	40.9 to 41.9 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
130587	45.0 to 61.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
130588	63.1 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
130589	75.4 to 86.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,900**
130590	87.1 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
130591	102.8 to 116.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
130592	116.1 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
130593	131.8 to 172.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	204	SF	$120	**$24,540**
130584	152.1 to 153.1 feet	**Vertical Change**	-.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **CLINTON ST** *Starting at:* **1633 CLINTON ST** **$83,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091524	CLINTON ST	1633-1901 CLINTON ST	1901 CLINTON ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130560	0.0 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
130561	7.8 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
130562	14.8 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
130563	32.1 to 50.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
130552	54.1 to 55.1 feet	**Vertical Change**	2.4"	5 ft	5	REF		
130564	54.8 to 61.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
130565	65.2 to 68.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
130581	69.6 to 100.8 feet	Key Note Segment		5 ft	156			
130566	100.8 to 102.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
130567	102.9 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	197	SF	$120	**$23,640**
130553	120.9 to 121.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
130568	142.6 to 152.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
130554	151.4 to 152.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
130569	155.3 to 160.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,940**
130570	160.4 to 169.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
130571	171.4 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
130572	178.9 to 181.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
130573	181.8 to 189.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
130555	186.9 to 187.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
130556	191.8 to 192.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
130574	194.8 to 210.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
130575	211.5 to 214.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
130557	214.8 to 215.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
130576	217.3 to 218.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
130577	222.6 to 239.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
130578	240.6 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
130579	249.1 to 279.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	153	SF	$120	**$18,300**
130558	252.7 to 253.7 feet	**Vertical Change**	.58"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091524	CLINTON ST	1633-1901 CLINTON ST	1901 CLINTON ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130559	278.6 to 279.6 feet	Vertical Change	-.29"	5 ft	5	REF		
130580	281.8 to 302.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,660**

TOTAL COST FOR: N *side of* **CLINTON ST** *Starting at:* **1633-1901 CLINTON ST** **$135,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091422	CLINTON ST	212 CLINTON ST	S C ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48198	0.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,580**
48199	43.1 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
48194	51.0 to 52.0 feet	**Vertical Change**	.51"	5 ft	5	REF		
48200	63.4 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
48201	67.8 to 75.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
48202	76.4 to 99.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
48195	85.7 to 86.7 feet	**Vertical Change**	.45"	5 ft	5	REF		
48203	102.0 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48196	102.9 to 103.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
48204	106.3 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
48197	119.8 to 120.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
48205	120.9 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **212 CLINTON ST** **$62,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101104	CLINTON ST	320 CLINTON ST	S B ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55798	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
55773	1.8 to 2.8 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
55774	3.5 to 4.5 feet	**Vertical Change**	2.3"	4 ft	4	REF		
55799	3.8 to 9.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	24	SF	$120	**$2,832**
55775	5.2 to 7.8 feet	**Vertical Change**	.29"	4 ft	10	REF		
55776	10.2 to 11.2 feet	**Vertical Change**	1.06"	4 ft	4	SF	$75	**$300**
55800	13.0 to 18.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	22	SF	$120	**$2,688**
55777	15.7 to 16.7 feet	**Vertical Change**	.36"	4 ft	4	REF		
55778	18.9 to 19.9 feet	**Vertical Change**	-.31"	4 ft	4	REF		
55801	19.3 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**
55779	21.0 to 22.0 feet	**Vertical Change**	.28"	4 ft	4	REF		
55780	24.9 to 25.9 feet	**Vertical Change**	.26"	4 ft	4	REF		
55802	24.9 to 27.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$1,008**
55781	29.3 to 32.5 feet	**Vertical Change**	-.3"	4 ft	13	REF		
55803	29.8 to 31.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
55783	42.0 to 45.2 feet	**Vertical Change**	.38"	4 ft	13	LF	$75	**$960**
55804	45.7 to 47.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$864**
55784	51.4 to 52.4 feet	**Vertical Change**	.34"	4 ft	4	LF	$75	**$300**
55805	53.1 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
55785	60.5 to 61.5 feet	**Vertical Change**	.54"	4 ft	4	SF	$75	**$300**
55786	64.0 to 65.0 feet	**Vertical Change**	-.28"	4 ft	4	REF		
55806	64.1 to 65.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
55787	65.7 to 66.7 feet	**Vertical Change**	-.73"	4 ft	4	SF	$75	**$300**
55788	67.4 to 68.4 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
55789	69.8 to 70.8 feet	**Vertical Change**	1.57"	4 ft	4	SF	$75	**$300**
55790	72.6 to 73.6 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
55791	74.4 to 75.4 feet	**Vertical Change**	.97"	4 ft	4	SF	$75	**$300**
55792	76.1 to 77.1 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101104	CLINTON ST	320 CLINTON ST	S B ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55793	79.8 to 80.8 feet	Vertical Change	.3"	4 ft	4	LF	$75	$300
55794	83.8 to 87.1 feet	Vertical Change	.37"	4 ft	13	LF	$75	$990
55795	88.1 to 89.1 feet	Vertical Change	-.3"	4 ft	4	LF	$75	$300
55807	100.3 to 115.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	61	SF	$120	$7,296
55796	102.0 to 103.0 feet	Vertical Change	.45"	4 ft	4	REF		
55797	113.4 to 114.4 feet	Vertical Change	.38"	4 ft	4	REF		

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **320 CLINTON ST** **$25,134.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101033	CLINTON ST	329 S A ST	S A ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55552	0.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,344**
55553	18.3 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **329 S A ST** **$13,776.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106091418	CLINTON ST	329 S D ST	S D ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48182	7.5 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
48183	24.0 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,680**
48184	67.4 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48185	71.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
48186	82.4 to 84.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
48187	85.8 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
48188	104.5 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
48189	111.5 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
48190	145.5 to 147.2 feet		5.0-6.0%	5 ft	8			
48191	147.2 to 148.2 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **329 S D ST** **$73,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101256	CLINTON ST	ELM AVE	FIG AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131560	2.3 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,120**
131585	47.8 to 83.9 feet	Key Note Segment		5 ft	181			
131561	83.9 to 127.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	218	SF	$40	**$8,700**
131562	130.5 to 163.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	163	SF	$120	**$19,620**
131563	164.2 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
131564	176.8 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
131565	200.5 to 223.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,740**
131566	223.6 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
131586	246.8 to 271.7 feet	Key Note Segment		5 ft	125			
131567	271.7 to 282.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,100**
131568	287.7 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
131587	288.8 to 301.7 feet	Key Note Segment		5 ft	65			
131569	306.0 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
131588	336.8 to 355.3 feet	Key Note Segment		5 ft	93			
131554	356.5 to 357.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
131570	357.0 to 363.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
131571	363.5 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
131555	366.1 to 367.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
131572	375.2 to 384.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
131589	384.9 to 396.3 feet	Key Note Segment		5 ft	57			
131556	395.3 to 396.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
131573	398.2 to 399.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
131574	399.3 to 403.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
131575	403.8 to 405.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
131576	405.4 to 407.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
131577	415.5 to 416.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
131578	419.1 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
131557	422.9 to 423.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101256	CLINTON ST	ELM AVE	FIG AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131558	437.0 to 438.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
131579	438.5 to 448.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
131559	443.7 to 444.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
131590	448.8 to 462.8 feet	Key Note Segment		5 ft	70			
131580	464.9 to 467.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
131581	467.4 to 468.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
131591	469.3 to 482.7 feet	Key Note Segment		5 ft	67			
131582	486.0 to 504.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
131592	504.8 to 522.9 feet	Key Note Segment		5 ft	91			
131583	522.9 to 539.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	83	SF	$40	**$3,320**
131584	539.5 to 549.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **ELM AVE** **$179,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101550	CLINTON ST	ELM AVE	409 CLINTON ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132449	0.6 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
132450	8.6 to 11.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
132451	14.0 to 34.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
132452	37.0 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
132453	54.5 to 55.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
132454	57.6 to 96.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	192	SF	$120	**$23,040**
132447	58.2 to 59.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
132448	83.4 to 84.4 feet	**Vertical Change**	.7"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **ELM AVE** **$51,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121349	CLINTON ST	FIG AVE	MAGNOLIA ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60875	0.0 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
60876	12.2 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
60877	26.0 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
60878	35.4 to 39.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
60879	44.1 to 60.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
60880	60.7 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
60896	88.8 to 110.7 feet	Key Note Segment		5 ft	110			
60881	111.0 to 143.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	164	SF	$40	**$6,560**
60882	143.8 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
60897	146.4 to 167.7 feet	Key Note Segment		5 ft	107			
60872	161.9 to 162.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
60883	168.6 to 203.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,700**
60884	203.4 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
60898	208.5 to 234.3 feet	Key Note Segment		5 ft	129			
60885	234.3 to 255.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	107	SF	$40	**$4,260**
60899	256.3 to 282.1 feet	Key Note Segment		5 ft	129			
60873	280.0 to 281.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
60886	282.1 to 314.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	160	SF	$40	**$6,400**
60900	315.8 to 336.5 feet	Key Note Segment		5 ft	104			
60887	337.0 to 340.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
60888	342.4 to 357.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
60901	357.8 to 380.4 feet	Key Note Segment		5 ft	113			
60902	381.8 to 401.8 feet	Key Note Segment		5 ft	100			
60889	401.8 to 424.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	112	SF	$40	**$4,480**
60890	424.7 to 440.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
60874	442.8 to 443.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
60891	443.8 to 481.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,860**
60903	483.2 to 496.5 feet	Key Note Segment		5 ft	67			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121349	CLINTON ST	FIG AVE	MAGNOLIA ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60892	505.1 to 512.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
60904	512.8 to 541.9 feet	Key Note Segment		5 ft	146			
60893	542.9 to 567.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
60894	569.3 to 591.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
60895	591.5 to 598.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **FIG AVE** **$164,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101526	CLINTON ST	FIG AVE	MANZANA CT	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132195	0.0 to 27.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**
132196	30.1 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
132197	33.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
132198	42.6 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
132199	54.8 to 95.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	204	SF	$120	**$24,420**
132193	68.8 to 69.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
132200	95.9 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
132201	107.0 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
132202	116.5 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
132203	131.2 to 143.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
132204	146.8 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
132205	160.4 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
132206	165.1 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	**$24,540**
132194	167.3 to 168.3 feet	**Vertical Change**	2.64"	5 ft	5	REF		
132207	206.4 to 233.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **FIG AVE** **$125,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121315	CLINTON ST	LILLY ST	MAGNOLIA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60692	0.6 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,050**
60693	12.3 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,154**
60694	29.8 to 32.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,512**
60695	33.0 to 38.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
60696	41.2 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
60697	47.5 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
60698	62.4 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,136**
60679	115.8 to 116.8 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$338**
60699	117.7 to 118.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$540**
60700	119.3 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,444**
60733	147.9 to 168.2 feet	Key Note Segment		5 ft	91			
60701	168.2 to 169.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$198**
60702	169.4 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
60703	174.8 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
60704	191.6 to 193.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
60745	192.2 to 193.3 feet		7.0-8.0%	5 ft	5			
60734	193.3 to 210.3 feet	Key Note Segment		5 ft	77			
60705	210.3 to 216.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	26	SF	$40	**$1,026**
60735	217.2 to 237.8 feet	Key Note Segment		5 ft	93			
60680	236.6 to 237.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
60706	243.9 to 247.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,998**
60681	246.3 to 247.3 feet	**Vertical Change**	2.85"	5 ft	5	REF		
60707	249.4 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
60736	255.5 to 281.4 feet	Key Note Segment		5 ft	117			
60682	276.6 to 277.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
60708	291.1 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,638**
60683	295.2 to 296.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
60709	313.8 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,970**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121315	CLINTON ST	LILLY ST	MAGNOLIA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60710	321.7 to 337.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,478**
60737	337.4 to 358.8 feet	Key Note Segment		5 ft	96			
60711	358.8 to 366.1 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	33	SF	$40	**$1,314**
60738	367.4 to 388.7 feet	Key Note Segment		5 ft	96			
60712	388.8 to 390.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	7	SF	$40	**$288**
60713	390.4 to 391.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$702**
60714	391.7 to 394.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,458**
60715	394.4 to 398.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,944**
60739	398.0 to 412.0 feet	Key Note Segment		5 ft	63			
60684	412.1 to 413.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
60716	412.6 to 420.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,996**
60717	422.3 to 424.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,026**
60718	426.8 to 444.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,342**
60719	444.1 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
60740	451.3 to 472.5 feet	Key Note Segment		5 ft	95			
60720	472.5 to 483.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,034**
60741	483.8 to 500.1 feet	Key Note Segment		5 ft	73			
60721	500.5 to 502.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
60722	503.8 to 515.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,048**
60723	515.0 to 517.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,512**
60742	517.8 to 541.3 feet	Key Note Segment		5 ft	106			
60685	539.0 to 540.0 feet	**Vertical Change**	.51"	5 ft	5	REF		
60724	541.6 to 557.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,316**
60725	557.5 to 568.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,156**
60686	566.0 to 567.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
60726	568.9 to 576.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,158**
60743	576.7 to 598.2 feet	Key Note Segment		5 ft	97			
60687	587.6 to 588.6 feet	**Vertical Change**	.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121315	CLINTON ST	LILLY ST	MAGNOLIA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60688	596.9 to 597.9 feet	Vertical Change	.46"	5 ft	5	REF		
60727	598.2 to 599.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$198
60744	609.8 to 633.7 feet	Key Note Segment		5 ft	108			
60689	632.2 to 633.2 feet	Vertical Change	.34"	5 ft	5	REF		
60728	633.7 to 638.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	$918
60729	639.3 to 645.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,564
60690	639.9 to 640.9 feet	Vertical Change	.36"	5 ft	5	REF		
60691	647.9 to 648.9 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$338
60730	649.0 to 651.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,566
60731	654.9 to 657.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,350
60732	657.4 to 659.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$972

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **LILLY ST** **$156,753.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121355	CLINTON ST	MAGNOLIA ST	MALONE ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60920	0.0 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
60921	1.2 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	339	SF	$120	**$40,740**
60908	19.6 to 20.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
60909	32.8 to 33.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
60910	44.5 to 45.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
60911	56.1 to 57.1 feet	**Vertical Change**	-.61"	5 ft	5	REF		
60936	76.6 to 97.1 feet	Key Note Segment		5 ft	103			
60912	77.0 to 78.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
60913	92.2 to 93.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
60922	97.6 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
60923	98.8 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
60924	112.0 to 113.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
60925	114.1 to 116.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
60926	119.3 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
60937	126.0 to 147.0 feet	Key Note Segment		5 ft	105			
60914	128.2 to 129.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
60915	145.5 to 146.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
60927	147.3 to 151.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$780**
60928	161.5 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
60916	168.1 to 169.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
60917	182.6 to 183.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
60929	184.1 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
60938	186.8 to 227.4 feet	Key Note Segment		5 ft	203			
60918	187.0 to 188.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
60930	227.4 to 242.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	77	SF	$40	**$3,080**
60919	242.8 to 243.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
60931	245.6 to 257.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
60932	259.6 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121355	CLINTON ST	MAGNOLIA ST	MALONE ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60933	267.0 to 268.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
60934	269.9 to 289.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
60935	289.8 to 305.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **MAGNOLIA ST** **$95,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121412	CLINTON ST	MAGNOLIA ST	LILLY ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61013	0.0 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,326**
61010	35.6 to 36.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
61014	49.0 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
61011	50.4 to 51.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
61015	63.5 to 86.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,528**
61016	86.7 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
61017	90.6 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
61018	100.7 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
61019	105.8 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,182**
61027	121.1 to 141.6 feet	Key Note Segment		5 ft	92			
61012	123.2 to 124.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
61020	143.8 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
61021	154.0 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
61022	162.6 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,130**
61028	172.6 to 198.1 feet	Key Note Segment		5 ft	115			
61023	201.3 to 215.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,776**
61024	216.3 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	252	SF	$120	**$30,186**
61025	275.0 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,830**
61026	294.1 to 300.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,348**
61029	298.3 to 300.3 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **MAGNOLIA ST** **$114,696.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121317	CLINTON ST	MAGNOLIA ST	MILLVIEW DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60747	0.0 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
60748	5.5 to 9.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
60746	6.1 to 7.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
60749	26.6 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
60750	48.8 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,632**
60751	52.2 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
60752	68.9 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **MAGNOLIA ST** **$14,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101541	CLINTON ST	MANZANA CT	ELM AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132331	0.0 to 7.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
132332	9.9 to 28.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
132333	29.1 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,120**
132329	46.6 to 47.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
132330	66.0 to 67.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
132334	69.5 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	169	SF	$120	**$20,280**
132335	104.3 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
132336	122.6 to 131.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
132337	134.5 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
132338	146.2 to 222.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	380	SF	$120	**$45,540**
132339	222.5 to 232.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **MANZANA CT** **$133,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121336	CLINTON ST	MILLVIEW DR	RAMONA ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60839	39.0 to 40.0 feet	Vertical Change	-.4"	4 ft	4	LF	$75	$300
60841	47.9 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	$1,824
60840	56.4 to 57.4 feet	Vertical Change	.39"	4 ft	4	REF		
60842	56.5 to 59.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
60843	69.2 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$480
60844	74.3 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	$2,544
60845	82.3 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	$2,928
60846	91.0 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	$7,344
60849	107.0 to 136.8 feet	Key Note Segment		4 ft	119			
60847	138.3 to 145.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	$3,216
60850	145.0 to 167.2 feet	Key Note Segment		4 ft	89			
60848	167.2 to 195.1 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	112	SF	$40	$4,464

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **MILLVIEW DR** **$24,636.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101613	CLINTON ST	PERCY ST	ELM AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132571	0.2 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
132572	3.8 to 8.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
132573	9.3 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
132574	21.9 to 47.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,240**
132575	49.6 to 79.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	151	SF	$120	**$18,120**
132576	82.0 to 101.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
132577	101.8 to 109.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
132578	112.1 to 116.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
132579	116.3 to 144.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	143	SF	$120	**$17,100**
132580	152.5 to 158.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
132569	155.0 to 156.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
132581	160.8 to 166.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,300**
132570	167.8 to 168.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
132582	170.2 to 171.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
132583	176.0 to 180.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
132584	185.3 to 192.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
132585	192.4 to 198.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
132586	199.0 to 206.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **PERCY ST** **$105,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121339	CLINTON ST	RAMONA ST	FIG AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60856	2.1 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
60857	9.1 to 30.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	86	SF	$120	**$10,272**
60858	32.3 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
60868	42.9 to 61.3 feet	Key Note Segment		4 ft	74			
60851	60.6 to 61.6 feet	**Vertical Change**	.38"	4 ft	4	REF		
60859	62.3 to 71.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	38	SF	$120	**$4,608**
60860	71.9 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,920**
60869	88.4 to 103.6 feet	Key Note Segment		4 ft	61			
60861	105.8 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
60852	118.1 to 119.1 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**
60853	120.2 to 121.2 feet	**Vertical Change**	.46"	4 ft	4	LF	$75	**$300**
60862	123.2 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
60863	128.8 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
60870	133.7 to 147.4 feet	Key Note Segment		4 ft	55			
60854	147.2 to 148.2 feet	**Vertical Change**	.55"	4 ft	4	REF		
60864	148.6 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	168	SF	$120	**$20,112**
60871	190.5 to 213.5 feet	Key Note Segment		4 ft	92			
60865	219.4 to 220.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
60866	227.2 to 240.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,192**
60867	243.1 to 252.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
60855	250.5 to 251.5 feet	**Vertical Change**	.26"	4 ft	4	REF		

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **RAMONA ST** **$70,104.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101059	CLINTON ST	S A ST	419 CLINTON ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55763	2.8 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
55772	11.7 to 27.5 feet	Key Note Segment		5 ft	79			
55764	28.3 to 29.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
55765	29.9 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
55766	39.8 to 42.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
55767	45.8 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
55768	54.3 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
55769	56.3 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55770	61.6 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,380**
55771	116.5 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **S A ST** **$40,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101107	CLINTON ST	S B ST	408 CLINTON ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55809	0.3 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
55810	8.4 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
55808	14.1 to 15.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
55811	19.5 to 31.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	60	SF	$40	**$2,400**
55812	33.6 to 36.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
55813	37.4 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
55814	50.2 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
55818	65.9 to 79.3 feet	Key Note Segment		5 ft	67			
55815	81.4 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55816	89.3 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
55817	99.1 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **S B ST** **$33,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106091420	CLINTON ST	S D ST	401 S D ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48192	19.4 to 20.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
48193	123.8 to 124.8 feet	Vertical Change	.44"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **S D ST** **$750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101031	CLINTON ST	S LAKE ST	509 CLINTON ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55532	1.8 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
55533	12.0 to 13.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	5	SF	$120	**$624**
55534	14.0 to 17.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,872**
55535	22.5 to 42.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	78	SF	$120	**$9,360**
55536	44.3 to 49.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	21	SF	$120	**$2,496**
55537	51.0 to 52.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
55538	52.6 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
55539	58.2 to 59.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
55529	61.8 to 62.8 feet	**Vertical Change**	.26"	4 ft	4	REF		
55540	62.3 to 63.3 feet	Cross Slope (PAR)	8.0-9.0%	4 ft	4	SF	$120	**$480**
55541	67.3 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
55530	68.5 to 69.5 feet	**Vertical Change**	.35"	4 ft	4	REF		
55542	68.9 to 72.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	15	SF	$120	**$1,776**
55543	72.6 to 74.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
55544	76.5 to 77.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
55531	78.5 to 79.5 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
55545	81.3 to 83.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
55546	87.8 to 92.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	17	SF	$120	**$2,064**
55547	92.9 to 97.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	19	SF	$120	**$2,256**
55548	100.8 to 111.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	42	SF	$120	**$5,040**
55549	111.3 to 113.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	7	SF	$120	**$816**
55550	113.4 to 115.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$768**
55551	115.2 to 125.1 feet	Key Note Segment		4 ft	40			

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **S LAKE ST** **$33,996.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101159	CLINTON ST	S LAKE ST	403 S LAKE ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56122	22.3 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
56123	29.5 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
56124	35.6 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**
56125	40.3 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
56121	40.6 to 41.6 feet	**Vertical Change**	.45"	4 ft	4	REF		
56126	48.0 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
56127	55.9 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
56128	69.4 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **S LAKE ST** **$14,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101202	CLINTON ST	SYCAMORE AVE	S LAKE ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56131	0.3 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
56132	4.8 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	255	SF	$120	**$30,600**
56129	57.5 to 58.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
56130	60.0 to 61.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
56133	63.0 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
56139	91.4 to 109.6 feet	Key Note Segment		5 ft	91			
56134	153.8 to 159.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
56140	164.3 to 182.2 feet	Key Note Segment		5 ft	90			
56135	190.7 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
56136	195.3 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
56137	205.9 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
56138	222.8 to 232.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **SYCAMORE AVE** **$53,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101334	CLINTON ST	SYCAMORE AVE	VINEYARD AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56365	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
56366	6.8 to 13.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
56367	13.5 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
56368	16.9 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
56357	17.7 to 18.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
56369	23.4 to 55.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
56370	58.5 to 99.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	203	SF	$120	**$24,360**
56371	101.3 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56358	105.0 to 106.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
56359	112.3 to 113.3 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
56360	123.7 to 124.7 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
56372	126.0 to 139.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
56361	127.2 to 128.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
56373	140.0 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
56362	146.7 to 147.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56363	155.3 to 156.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
56374	167.3 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
56364	171.2 to 172.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
56375	174.7 to 175.8 feet		5.0-6.0%	5 ft	6			
56376	176.4 to 177.8 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: SE *side of* **CLINTON ST** *Starting at:* **SYCAMORE AVE** **$71,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101556	CLINTON ST	TOZER ST	PERCY ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132458	3.3 to 8.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
132455	6.6 to 7.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
132459	8.9 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
132460	25.0 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
132461	33.3 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
132462	65.7 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
132463	76.3 to 107.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	154	SF	$120	**$18,480**
132464	107.1 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
132456	119.1 to 120.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
132465	133.9 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
132466	140.8 to 214.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	370	SF	$120	**$44,400**
132467	218.4 to 263.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	227	SF	$120	**$27,300**
132468	264.5 to 266.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
132469	268.9 to 280.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
132470	282.9 to 293.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
132471	293.7 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
132457	295.2 to 296.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **CLINTON ST** *Starting at:* **TOZER ST** **$166,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091518	CLINTON ST	TOZER ST	1601 CLINTON ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130550	0.0 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	53	SF	$120	**$6,384**
130551	18.0 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	96	SF	$120	**$11,508**
130549	24.9 to 25.9 feet	**Vertical Change**	.59"	7 ft	7	REF		

TOTAL COST FOR: S *side of* **CLINTON ST** *Starting at:* **TOZER ST** **$17,892.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101550	CLINTON ST	VINEYARD AVE	SYCAMORE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57460	0.0 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	327	SF	$120	**$39,180**
57461	68.3 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
57464	79.6 to 99.7 feet	Key Note Segment		5 ft	101			
57462	102.1 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
57465	105.8 to 129.9 feet	Key Note Segment		5 ft	121			
57463	130.3 to 134.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$860**

TOTAL COST FOR: N *side of* **CLINTON ST** *Starting at:* **VINEYARD AVE** **$47,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211110	CLOUD REST CT	MONTEREY ST	MONTEREY ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79150	0.0 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
79165	21.7 to 41.6 feet	Key Note Segment		5 ft	100			
79151	42.4 to 55.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	65	SF	$40	**$2,580**
79166	55.3 to 75.8 feet	Key Note Segment		5 ft	103			
79152	76.4 to 90.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	69	SF	$40	**$2,780**
79153	91.1 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79145	107.9 to 108.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
79154	119.6 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
79167	128.9 to 148.8 feet	Key Note Segment		5 ft	100			
79155	149.1 to 150.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
79156	158.3 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
79147	161.5 to 162.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		
79168	177.6 to 198.0 feet	Key Note Segment		5 ft	102			
79157	201.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79158	218.0 to 225.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
79159	232.8 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
79169	255.9 to 275.2 feet	Key Note Segment		5 ft	97			
79148	264.3 to 265.3 feet	**Vertical Change**	.72"	5 ft	5	REF		
79160	275.8 to 293.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
79170	293.3 to 312.5 feet	Key Note Segment		5 ft	96			
79161	314.1 to 316.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79162	318.2 to 323.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
79163	323.1 to 329.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
79164	329.9 to 336.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
79149	336.6 to 337.6 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: N/W/S *side of* **CLOUD REST CT** *Starting at:* **MONTEREY ST** **$75,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191437	COCONUT ST	HACIENDA ST	PERSIMMON ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74528	77.8 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
74529	88.3 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
74530	96.7 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
74531	106.3 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
74532	113.2 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,694**
74527	127.9 to 128.9 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **COCONUT ST** *Starting at:* **HACIENDA ST** **$16,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191445	COCONUT ST	PERSIMMON ST	HACIENDA ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74590	5.3 to 8.2 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	13	SF	$120	**$1,566**
74591	8.2 to 14.9 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	30	SF	$120	**$3,618**
74592	24.3 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
74593	35.3 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
74597	46.6 to 66.8 feet	Key Note Segment		5 ft	91			
74594	67.9 to 68.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74598	71.3 to 92.3 feet	Key Note Segment		5 ft	95			
74588	91.8 to 92.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
74595	110.6 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
74596	127.7 to 137.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,292**
74599	146.5 to 166.8 feet	Key Note Segment		5 ft	91			
74589	157.1 to 158.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **COCONUT ST** *Starting at:* **PERSIMMON ST** **$16,146.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181639	COLIMA AVE	IVY GLEN DR	ORCHARD HILL DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102279	4.8 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
102292	12.0 to 28.9 feet	Key Note Segment		5 ft	85			
102280	32.4 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102293	38.4 to 54.3 feet	Key Note Segment		5 ft	80			
102270	47.3 to 48.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
102281	59.8 to 63.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
102282	67.9 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102283	92.1 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102272	92.5 to 93.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
102294	96.7 to 118.6 feet	Key Note Segment		5 ft	110			
102273	110.5 to 111.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
102284	119.7 to 124.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
102295	125.1 to 145.2 feet	Key Note Segment		5 ft	100			
102285	147.5 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
102274	153.0 to 154.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
102286	161.1 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102275	161.9 to 162.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
102287	166.8 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
102288	173.9 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102289	178.4 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
102276	179.3 to 180.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
102296	182.6 to 202.4 feet	Key Note Segment		5 ft	99			
102277	191.8 to 192.8 feet	**Vertical Change**	3.03"	5 ft	5	REF		
102278	202.2 to 203.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
102290	205.3 to 212.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
102297	213.5 to 229.5 feet	Key Note Segment		5 ft	80			
102291	234.0 to 239.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: E *side of* **COLIMA AVE** *Starting at:* **IVY GLEN DR** **$29,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181645	COLIMA AVE	ORCHARD HILL DR	IVY GLEN DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102317	1.1 to 24.8 feet	Key Note Segment		5 ft	118			
102307	25.3 to 28.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$600
102308	59.7 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
102318	62.3 to 84.2 feet	Key Note Segment		5 ft	110			
102298	62.7 to 63.7 feet	Vertical Change	-.44"	5 ft	5	REF		
102309	87.1 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
102319	88.2 to 110.9 feet	Key Note Segment		5 ft	114			
102299	99.7 to 100.7 feet	Vertical Change	.37"	5 ft	5	REF		
102310	111.5 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
102311	122.1 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
102312	130.3 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
102313	140.2 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
102300	144.3 to 145.3 feet	Vertical Change	.36"	5 ft	5	REF		
102320	149.4 to 170.3 feet	Key Note Segment		5 ft	105			
102321	174.0 to 197.1 feet	Key Note Segment		5 ft	116			
102301	186.4 to 187.4 feet	Vertical Change	.49"	5 ft	5	REF		
102302	205.9 to 206.9 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
102303	213.2 to 214.2 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
102322	233.4 to 257.1 feet	Key Note Segment		5 ft	119			
102305	239.7 to 240.7 feet	Vertical Change	.4"	5 ft	5	REF		
102314	258.4 to 260.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
102323	261.3 to 283.3 feet	Key Note Segment		5 ft	110			
102315	283.3 to 290.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	35	SF	$40	$1,400
102306	293.0 to 294.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
102316	295.2 to 296.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780

TOTAL COST FOR: W *side of* **COLIMA AVE** *Starting at:* **ORCHARD HILL DR** **$19,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281619	COLOMBARD DR	1322 COLOMBARD DR	PECAN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114081	0.0 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
114057	5.6 to 6.6 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
114058	8.9 to 9.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
114082	10.3 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
114059	15.3 to 16.3 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
114083	25.5 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
114084	30.7 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
114085	38.1 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
114061	41.9 to 42.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
114115	51.9 to 66.1 feet	Key Note Segment		5 ft	71			
114062	52.7 to 53.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
114063	60.9 to 61.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
114064	67.3 to 68.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
114086	68.6 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
114116	78.2 to 92.3 feet	Key Note Segment		5 ft	71			
114065	86.2 to 87.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
114066	93.2 to 94.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
114067	108.7 to 109.7 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
114087	122.1 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
114117	149.3 to 166.1 feet	Key Note Segment		5 ft	84			
114068	159.1 to 160.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
114069	166.5 to 167.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
114088	167.8 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
114070	172.8 to 176.8 feet	**Vertical Change**	.42"	5 ft	20	REF		
114071	177.5 to 178.5 feet	**Vertical Change**	3.45"	5 ft	5	REF		
114118	178.4 to 191.7 feet	Key Note Segment		5 ft	67			
114089	192.2 to 195.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$680**
114090	196.3 to 201.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281619	COLOMBARD DR	1322 COLOMBARD DR	PECAN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114091	206.1 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
114072	231.5 to 232.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
114092	240.2 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
114119	247.9 to 261.8 feet	Key Note Segment		5 ft	70			
114073	255.9 to 256.9 feet	**Vertical Change**	-.43"	5 ft	5	REF		
114093	262.2 to 263.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
114094	266.3 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
114120	274.6 to 288.3 feet	Key Note Segment		5 ft	68			
114074	280.0 to 281.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
114095	288.8 to 297.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
114075	293.7 to 294.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
114125	296.9 to 297.9 feet	**Protruding Object**	24"	5 ft	5	JOB	$99	**$99**
114076	299.6 to 300.6 feet	**Vertical Change**	.59"	5 ft	5	REF		
114096	300.1 to 302.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
114097	302.5 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
114098	312.9 to 314.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
114099	315.7 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
114100	319.3 to 322.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
114101	326.1 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
114102	332.3 to 339.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
114077	338.0 to 339.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
114103	341.7 to 346.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
114121	347.8 to 362.2 feet	Key Note Segment		5 ft	72			
114104	362.2 to 374.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	60	SF	$40	**$2,380**
114122	374.8 to 388.8 feet	Key Note Segment		5 ft	70			
114105	388.8 to 389.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
114106	391.1 to 393.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
114107	396.4 to 401.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281619	COLOMBARD DR	1322 COLOMBARD DR	PECAN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114108	403.6 to 438.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
114109	441.4 to 444.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
114123	444.7 to 457.9 feet	Key Note Segment		5 ft	66			
114078	452.6 to 453.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
114110	458.4 to 462.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$780**
114111	467.8 to 471.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
114124	471.3 to 485.0 feet	Key Note Segment		5 ft	69			
114079	479.3 to 480.3 feet	**Vertical Change**	-.52"	5 ft	5	REF		
114112	485.4 to 508.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	118	SF	$40	**$4,700**
114080	486.5 to 487.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
114113	515.8 to 520.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
114126	518.9 to 521.3 feet		5.0-6.0%	5 ft	12			
114127	518.9 to 521.3 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
114114	520.2 to 521.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: W *side of* **COLOMBARD DR** *Starting at:* **1322 COLOMBARD DR** **$123,224.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281435	COLOMBARD DR	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112982	0.5 to 6.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
112983	8.3 to 17.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,220**
112984	21.3 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
112985	24.3 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
113005	30.7 to 50.2 feet	Key Note Segment		5 ft	98			
112965	41.1 to 42.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
112966	50.5 to 51.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
112986	51.7 to 55.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
113006	56.9 to 76.0 feet	Key Note Segment		5 ft	96			
112987	76.5 to 79.0 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	13	SF	$40	**$500**
112967	77.8 to 78.8 feet	**Vertical Change**	.69"	5 ft	5	REF		
112968	80.0 to 81.0 feet	**Vertical Change**	3.4"	5 ft	5	REF		
112988	80.3 to 85.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
112989	88.4 to 101.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	67	SF	$120	**$8,040**
112990	103.2 to 107.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
113007	109.3 to 128.1 feet	Key Note Segment		5 ft	94			
112991	131.9 to 140.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
112992	143.0 to 157.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,700**
112993	158.5 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
113008	160.5 to 179.8 feet	Key Note Segment		5 ft	97			
112994	182.5 to 195.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,920**
112969	193.2 to 194.2 feet	**Vertical Change**	.72"	5 ft	5	REF		
112970	196.5 to 197.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
112995	196.9 to 201.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
112971	198.1 to 199.1 feet	**Vertical Change**	.57"	5 ft	5	REF		
112972	201.6 to 202.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112996	202.5 to 207.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
112973	203.7 to 204.7 feet	**Vertical Change**	.42"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281435	COLOMBARD DR	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112997	207.9 to 209.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
112998	211.5 to 236.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,700**
112974	225.8 to 226.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
112999	236.0 to 237.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
113009	238.4 to 257.8 feet	Key Note Segment		5 ft	97			
113000	259.0 to 263.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
112975	265.1 to 266.1 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
113010	265.3 to 283.1 feet	Key Note Segment		5 ft	89			
112976	273.8 to 274.8 feet	**Vertical Change**	-.41"	5 ft	5	REF		
112977	283.7 to 284.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113001	284.5 to 341.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	287	SF	$120	**$34,440**
113011	341.9 to 361.2 feet	Key Note Segment		5 ft	97			
112978	352.4 to 353.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
112979	361.6 to 362.6 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
113002	362.8 to 366.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
113003	366.5 to 369.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
113012	369.6 to 388.7 feet	Key Note Segment		5 ft	96			
112980	389.0 to 390.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
113004	392.1 to 402.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
112981	402.4 to 403.4 feet	**Vertical Change**	.43"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **COLOMBARD DR** *Starting at:* **GARY LN** **$124,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281615	COLOMBARD DR	GARY LN	1302 COLOMBARD DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114012	0.0 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
113984	2.3 to 3.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
114013	6.3 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
113985	7.6 to 8.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
113986	15.1 to 16.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
113987	18.4 to 19.4 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
113988	24.5 to 25.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
113989	26.8 to 27.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
114045	31.4 to 46.3 feet	Key Note Segment		5 ft	75			
113990	40.1 to 41.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
113991	46.9 to 47.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
114014	50.1 to 56.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
114046	57.5 to 71.5 feet	Key Note Segment		5 ft	70			
113992	61.9 to 62.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
114015	71.8 to 73.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
114016	73.8 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
114017	81.8 to 85.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
114018	92.4 to 95.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
114019	96.9 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
114020	103.7 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
113993	107.5 to 108.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
113994	120.5 to 121.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
114047	132.0 to 145.7 feet	Key Note Segment		5 ft	68			
113995	133.3 to 134.3 feet	**Vertical Change**	-.49"	5 ft	5	REF		
114021	145.9 to 157.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	60	SF	$40	**$2,380**
113996	146.9 to 147.9 feet	**Vertical Change**	-.57"	5 ft	5	REF		
114048	157.8 to 171.7 feet	Key Note Segment		5 ft	69			
113997	165.9 to 166.9 feet	**Vertical Change**	.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281615	COLOMBARD DR	GARY LN	1302 COLOMBARD DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114022	174.5 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
113998	190.2 to 191.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
114023	194.8 to 214.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
114024	215.5 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
113999	219.6 to 220.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
114049	231.6 to 245.8 feet	Key Note Segment		5 ft	71			
114000	239.8 to 240.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
114025	245.8 to 247.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
114001	246.7 to 247.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
114026	247.5 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
114002	258.7 to 259.7 feet	**Vertical Change**	-.63"	5 ft	5	REF		
114027	259.3 to 265.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
114050	265.8 to 272.5 feet	Key Note Segment		5 ft	34			
114003	265.9 to 266.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
114028	275.8 to 277.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
114029	279.0 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
114030	283.7 to 285.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
114031	288.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
114032	305.8 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
114033	316.8 to 318.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
114034	326.3 to 327.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
114055	327.2 to 329.3 feet		6.0-7.0%	5 ft	11			
114056	327.2 to 329.3 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
114004	328.0 to 329.0 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
114035	329.2 to 330.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
114051	332.6 to 346.7 feet	Key Note Segment		5 ft	71			
114005	333.6 to 334.6 feet	**Vertical Change**	-.65"	5 ft	5	REF		
114036	347.6 to 357.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281615	COLOMBARD DR	GARY LN	1302 COLOMBARD DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114052	357.8 to 372.1 feet	Key Note Segment		5 ft	72			
114037	372.3 to 374.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$380
114038	375.1 to 382.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
114006	384.7 to 385.7 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
114007	387.3 to 388.3 feet	Vertical Change	.77"	5 ft	5	SF	$75	$375
114039	407.7 to 409.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
114053	409.7 to 423.6 feet	Key Note Segment		5 ft	70			
114040	423.6 to 429.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,140
114041	432.2 to 456.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	$14,580
114008	457.3 to 458.3 feet	Vertical Change	-.31"	5 ft	5	REF		
114042	457.3 to 458.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
114009	465.2 to 466.2 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
114043	471.0 to 480.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
114054	483.3 to 497.0 feet	Key Note Segment		5 ft	69			
114010	484.4 to 485.4 feet	Vertical Change	-.34"	5 ft	5	REF		
114044	497.0 to 510.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	68	SF	$40	$2,700
114011	504.5 to 505.5 feet	Vertical Change	-.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COLOMBARD DR** *Starting at:* **GARY LN** **$125,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281506	COLOMBARD DR	MADRID LN	GARY LN	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113286	0.3 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
113287	10.3 to 23.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
113278	10.9 to 11.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
113305	23.7 to 43.0 feet	Key Note Segment		5 ft	97			
113288	44.3 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
113289	46.9 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	157	SF	$120	**$18,840**
113306	79.6 to 98.8 feet	Key Note Segment		5 ft	96			
113279	80.1 to 81.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
113290	99.8 to 105.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
113307	105.8 to 124.2 feet	Key Note Segment		5 ft	92			
113291	127.8 to 131.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
113292	133.5 to 148.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
113293	150.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
113294	156.7 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
113295	183.4 to 191.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
113308	191.2 to 210.7 feet	Key Note Segment		5 ft	98			
113296	211.8 to 214.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
113297	215.0 to 223.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
113280	216.0 to 217.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
113298	224.8 to 240.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
113299	242.1 to 247.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
113309	247.3 to 266.8 feet	Key Note Segment		5 ft	98			
113300	267.5 to 271.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
113301	275.2 to 286.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$7,020**
113302	287.3 to 303.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,660**
113281	302.1 to 303.1 feet	**Vertical Change**	3.43"	5 ft	5	REF		
113310	303.4 to 321.8 feet	Key Note Segment		5 ft	92			
113282	304.0 to 305.0 feet	**Vertical Change**	3.01"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281506	COLOMBARD DR	MADRID LN	GARY LN	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113303	323.8 to 330.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
113283	329.0 to 330.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
113311	330.1 to 347.7 feet	Key Note Segment		5 ft	88			
113304	348.9 to 381.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,380**
113284	355.2 to 356.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113285	375.2 to 376.2 feet	**Vertical Change**	3.05"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COLOMBARD DR** *Starting at:* **MADRID LN** **$130,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114189	1.6 to 3.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
114128	3.9 to 4.9 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
114190	5.8 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
114191	9.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
114192	17.2 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
114129	27.7 to 28.7 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
114193	31.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
114250	37.6 to 51.5 feet	Key Note Segment		5 ft	70			
114194	51.5 to 62.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,180**
114130	52.0 to 53.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
114251	62.8 to 77.8 feet	Key Note Segment		5 ft	75			
114195	78.4 to 84.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,180**
114131	80.6 to 81.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
114132	82.8 to 83.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
114196	100.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114197	106.6 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
114198	112.9 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
114133	128.5 to 129.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
114271	131.8 to 133.8 feet		5.0-6.0%	5 ft	10			
114199	132.1 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
114252	139.9 to 153.8 feet	Key Note Segment		5 ft	70			
114200	153.8 to 166.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,600**
114253	167.5 to 180.4 feet	Key Note Segment		5 ft	65			
114134	181.8 to 182.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
114135	195.0 to 196.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
114201	200.5 to 202.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
114202	202.6 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
114136	206.2 to 207.2 feet	**Vertical Change**	2.62"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114137	220.0 to 221.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
114203	222.5 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,780
114254	243.8 to 257.1 feet	Key Note Segment		5 ft	67			
114138	260.3 to 261.3 feet	Vertical Change	.27"	5 ft	5	REF		
114204	261.2 to 267.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
114255	270.3 to 283.4 feet	Key Note Segment		5 ft	65			
114139	270.9 to 271.9 feet	Vertical Change	-.37"	5 ft	5	REF		
114140	284.5 to 285.5 feet	Vertical Change	-.33"	5 ft	5	REF		
114205	285.5 to 293.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
114206	293.7 to 298.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$2,940
114141	297.2 to 298.2 feet	Vertical Change	-.27"	5 ft	5	REF		
114207	298.6 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,580
114142	303.2 to 304.2 feet	Vertical Change	-.45"	5 ft	5	LF	$75	$375
114208	310.9 to 326.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
114143	322.9 to 323.9 feet	Vertical Change	.59"	5 ft	5	REF		
114209	329.7 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
114144	335.8 to 336.8 feet	Vertical Change	-.76"	5 ft	5	SF	$75	$375
114210	337.3 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
114211	342.1 to 346.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
114256	347.3 to 361.2 feet	Key Note Segment		5 ft	70			
114272	365.7 to 367.3 feet		5.0-6.0%	5 ft	8			
114145	366.8 to 367.8 feet	Vertical Change	1.79"	5 ft	5	SF	$75	$375
114212	368.5 to 374.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
114257	374.3 to 387.7 feet	Key Note Segment		5 ft	67			
114146	375.4 to 376.4 feet	Vertical Change	-.44"	5 ft	5	REF		
114147	388.2 to 389.2 feet	Vertical Change	.51"	5 ft	5	REF		
114213	393.8 to 398.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
114148	400.7 to 401.7 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114149	438.9 to 439.9 feet	Vertical Change	-.67"	5 ft	5	SF	$75	$375
114150	438.9 to 439.9 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
114214	441.1 to 445.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
114215	445.7 to 448.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
114151	449.6 to 450.6 feet	Vertical Change	1.86"	5 ft	5	REF		
114216	449.7 to 450.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
114258	450.8 to 464.0 feet	Key Note Segment		5 ft	66			
114152	464.7 to 465.7 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
114217	467.8 to 477.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
114259	477.5 to 491.3 feet	Key Note Segment		5 ft	69			
114153	504.6 to 505.6 feet	Vertical Change	1.37"	5 ft	5	SF	$75	$375
114218	506.4 to 507.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	$840
114219	508.0 to 510.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	$1,200
114220	510.0 to 512.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,680
114154	510.4 to 511.4 feet	Vertical Change	-.71"	5 ft	5	REF		
114221	513.1 to 515.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
114222	517.9 to 518.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
114156	542.6 to 543.6 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
114223	543.8 to 553.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
114260	553.5 to 567.6 feet	Key Note Segment		5 ft	71			
114157	555.1 to 556.1 feet	Vertical Change	-.32"	5 ft	5	REF		
114158	568.7 to 569.7 feet	Vertical Change	.89"	5 ft	5	SF	$75	$375
114261	580.7 to 594.7 feet	Key Note Segment		5 ft	70			
114159	582.2 to 583.2 feet	Vertical Change	.44"	5 ft	5	REF		
114224	594.8 to 597.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$620
114160	595.7 to 596.7 feet	Vertical Change	-.35"	5 ft	5	REF		
114161	597.4 to 598.4 feet	Vertical Change	.58"	5 ft	5	REF		
114225	598.6 to 599.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114162	599.2 to 600.2 feet	Vertical Change	3.41"	5 ft	5	REF		
114163	613.7 to 614.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
114164	618.3 to 619.3 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
114165	622.0 to 623.0 feet	Vertical Change	.77"	5 ft	5	SF	$75	$375
114166	624.0 to 625.0 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
114167	625.9 to 626.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
114226	632.9 to 634.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
114168	633.9 to 634.9 feet	Vertical Change	.98"	5 ft	5	REF		
114227	642.5 to 646.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
114169	647.4 to 648.4 feet	Vertical Change	-.6"	5 ft	5	SF	$75	$375
114228	650.6 to 653.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
114229	653.9 to 656.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
114262	657.3 to 671.6 feet	Key Note Segment		5 ft	72			
114230	672.3 to 680.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	$1,640
114170	679.0 to 680.0 feet	Vertical Change	-.33"	5 ft	5	REF		
114231	680.8 to 681.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
114263	682.5 to 697.8 feet	Key Note Segment		5 ft	77			
114171	685.2 to 686.2 feet	Vertical Change	.47"	5 ft	5	REF		
114232	698.2 to 708.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	54	SF	$40	$2,140
114233	708.9 to 717.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
114270	712.8 to 713.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
114234	750.6 to 761.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
114264	762.8 to 777.1 feet	Key Note Segment		5 ft	72			
114235	777.7 to 785.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
114265	788.7 to 802.8 feet	Key Note Segment		5 ft	71			
114172	798.7 to 799.7 feet	Vertical Change	1.29"	5 ft	5	REF		
114236	802.8 to 827.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	122	SF	$40	$4,860
114237	828.8 to 831.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114266	842.1 to 856.3 feet	Key Note Segment		5 ft	71			
114173	843.2 to 844.2 feet	Vertical Change	.36"	5 ft	5	REF		
114238	860.0 to 873.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
114174	871.8 to 872.8 feet	Vertical Change	.87"	5 ft	5	REF		
114239	879.1 to 882.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
114240	882.0 to 886.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
114241	887.8 to 891.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
114175	889.2 to 890.2 feet	Vertical Change	-.69"	5 ft	5	REF		
114267	893.7 to 908.9 feet	Key Note Segment		5 ft	76			
114176	895.4 to 896.4 feet	Vertical Change	.28"	5 ft	5	REF		
114242	909.3 to 925.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	80	SF	$40	**$3,200**
114177	916.0 to 917.0 feet	Vertical Change	.29"	5 ft	5	REF		
114243	925.3 to 927.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
114178	933.2 to 934.2 feet	Vertical Change	.6"	5 ft	5	SF	$75	**$375**
114244	944.4 to 946.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
114179	948.1 to 949.1 feet	Vertical Change	3.99"	5 ft	5	SF	$75	**$375**
114180	949.9 to 950.9 feet	Vertical Change	.62"	5 ft	5	SF	$75	**$375**
114181	951.6 to 952.6 feet	Vertical Change	-1.47"	5 ft	5	SF	$75	**$375**
114182	953.3 to 956.4 feet	Vertical Change	.35"	5 ft	16	LF	$75	**$1,163**
114273	957.5 to 959.3 feet		6.0-7.0%	5 ft	9			
114245	959.3 to 972.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
114268	972.8 to 987.7 feet	Key Note Segment		5 ft	75			
114183	982.6 to 983.6 feet	Vertical Change	.32"	5 ft	5	REF		
114246	988.0 to 998.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	54	SF	$40	**$2,160**
114269	998.9 to 1012.8 feet	Key Note Segment		5 ft	70			
114247	1013.0 to 1018.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
114184	1020.4 to 1021.4 feet	Vertical Change	.49"	5 ft	5	LF	$75	**$375**
114185	1026.9 to 1027.9 feet	Vertical Change	.5"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281628	COLOMBARD DR	PECAN AVE	GARY LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114248	1029.7 to 1035.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
114186	1032.6 to 1033.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
114249	1038.3 to 1042.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
114187	1039.9 to 1040.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
114274	1047.6 to 1048.8 feet		5.0-6.0%	5 ft	6			
114188	1048.3 to 1049.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **COLOMBARD DR** *Starting at:* **PECAN AVE** **$180,176.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031237	COLUMBIA ST	708 COLUMBIA ST	RIVERSIDE DR	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120092	0.4 to 5.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
120098	6.6 to 24.3 feet	Key Note Segment		5 ft	89			
120093	24.8 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
120084	24.9 to 25.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
120099	29.5 to 47.4 feet	Key Note Segment		5 ft	90			
120085	38.4 to 39.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
120086	45.3 to 46.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
120094	48.9 to 52.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
120095	55.8 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
120087	61.1 to 62.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
120088	66.6 to 67.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
120100	67.5 to 80.2 feet	Key Note Segment		5 ft	64			
120090	79.1 to 80.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
120096	85.6 to 91.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
120097	91.7 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
120091	93.8 to 94.8 feet	**Vertical Change**	.48"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COLUMBIA ST** *Starting at:* **708 COLUMBIA ST** **$19,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031236	COLUMBIA ST	716 COLUMBIA ST	708 COLUMBIA ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120073	0.0 to 19.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,820**
120074	19.7 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
120075	34.8 to 40.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
120083	41.1 to 42.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
120081	44.7 to 60.5 feet	Key Note Segment		5 ft	79			
120069	58.9 to 59.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
120076	63.1 to 69.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	30	SF	$120	**$3,600**
120070	63.6 to 64.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
120077	71.7 to 75.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	18	SF	$120	**$2,160**
120078	76.0 to 77.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
120079	78.0 to 80.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
120080	84.6 to 86.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
120082	87.1 to 103.3 feet	Key Note Segment		5 ft	81			
120071	96.1 to 97.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
120072	99.2 to 100.2 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COLUMBIA ST** *Starting at:* **716 COLUMBIA ST** **$32,259.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031516	COLUMBIA ST	816 COLUMBIA ST	808 COLUMBIA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120814	3.3 to 16.5 feet	Key Note Segment		5 ft	66			
120810	3.4 to 4.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
120813	17.1 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
120811	30.2 to 31.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
120812	36.0 to 39.0 feet	**Vertical Change**	-.27"	5 ft	15	LF	$75	**$1,125**

TOTAL COST FOR: W *side of* **COLUMBIA ST** *Starting at:* **816 COLUMBIA ST** **$2,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031115	COLUMBIA ST	900 COLUMBIA ST	E LINCOLN AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119670	3.9 to 15.1 feet	Key Note Segment		5 ft	56			
119668	19.4 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
119669	36.1 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
119667	40.7 to 41.7 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COLUMBIA ST** *Starting at:* **900 COLUMBIA ST** **$5,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271037	COMMON WAY	3248 COMMON WAY	GLENVILLE AVE	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110362	0.3 to 14.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
110358	2.8 to 3.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
110363	14.1 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
110359	23.9 to 24.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110368	27.3 to 63.9 feet	Key Note Segment		5 ft	183			
110360	52.8 to 53.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
110364	63.9 to 65.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
110365	65.5 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
110366	82.0 to 83.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
110367	87.2 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
110361	92.0 to 93.0 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **COMMON WAY** *Starting at:* **3248 COMMON WAY** **$29,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261211	COMMON WAY	3326 COMMON WAY	N WESTBERRY BLV	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108946	0.1 to 32.0 feet	Key Note Segment		5 ft	160			
108940	10.9 to 11.9 feet	**Vertical Change**	2.95"	5 ft	5	REF		
108941	30.1 to 31.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
108942	33.0 to 35.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
108943	35.0 to 36.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
108944	38.4 to 48.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
108945	51.5 to 68.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**

TOTAL COST FOR: S *side of* **COMMON WAY** *Starting at:* **3326 COMMON WAY** **$17,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271033	COMMON WAY	GLENVILLE AVE	N WESTBERRY BLV	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110336	0.3 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,600**
110328	7.3 to 8.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
110346	27.8 to 55.2 feet	Key Note Segment		5 ft	137			
110329	37.0 to 38.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
110330	57.1 to 58.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
110337	58.5 to 60.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
110338	61.8 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
110339	74.4 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,940**
110340	84.3 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
110347	104.5 to 135.3 feet	Key Note Segment		5 ft	154			
110331	110.8 to 111.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
110332	133.4 to 134.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
110341	139.1 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
110333	144.4 to 145.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
110342	149.1 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
110348	154.4 to 184.3 feet	Key Note Segment		5 ft	150			
110334	185.5 to 186.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
110343	186.2 to 204.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,860**
110344	207.7 to 216.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
110335	207.9 to 208.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
110345	216.8 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **COMMON WAY** *Starting at:* **GLENVILLE AVE** **$63,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271035	COMMON WAY	N WESTBERRY BLV	3248 COMMON WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110353	2.4 to 27.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
110349	15.8 to 16.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
110356	29.9 to 58.7 feet	Key Note Segment		5 ft	144			
110350	33.3 to 34.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
110354	59.2 to 60.2 feet	**Cross Slope (Driveway)**	9.0-10.0%	5 ft	5	SF	$40	**$200**
110355	61.6 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
110351	66.4 to 67.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
110357	81.8 to 118.4 feet	Key Note Segment		5 ft	183			
110352	120.2 to 121.2 feet	**Vertical Change**	1.08"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **COMMON WAY** *Starting at:* **N WESTBERRY BLV** **$26,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261210	COMMON WAY	WESTBERRY BVD	3327 COMMON WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108936	0.7 to 4.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
108937	7.6 to 36.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,460**
108933	8.3 to 9.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
108939	36.7 to 64.8 feet	Key Note Segment		5 ft	140			
108935	65.2 to 68.3 feet	**Vertical Change**	.27"	5 ft	16	REF		
108938	66.1 to 69.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **COMMON WAY** *Starting at:* **WESTBERRY BVD** **$21,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281448	CONCORD AVE	1142 CONCORD AVE	GARY LN	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113113	0.0 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	283	SF	$120	**$33,960**
113121	56.6 to 75.8 feet	Key Note Segment		5 ft	96			
113111	66.2 to 67.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
113114	76.9 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
113122	82.4 to 101.3 feet	Key Note Segment		5 ft	95			
113115	102.3 to 105.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
113116	106.0 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
113117	111.3 to 156.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	227	SF	$120	**$27,240**
113123	157.4 to 176.3 feet	Key Note Segment		5 ft	95			
113118	178.1 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
113124	182.7 to 202.3 feet	Key Note Segment		5 ft	98			
113112	192.6 to 193.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
113119	203.3 to 204.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
113120	204.4 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**

TOTAL COST FOR: W *side of* **CONCORD AVE** *Starting at:* **1142 CONCORD AVE** **$87,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281451	CONCORD AVE	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113135	0.0 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
113136	9.1 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,140**
113155	48.2 to 66.8 feet	Key Note Segment		5 ft	93			
113125	67.8 to 68.8 feet	**Vertical Change**	2.54"	5 ft	5	SF	$75	**$375**
113137	70.0 to 73.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
113156	74.3 to 94.1 feet	Key Note Segment		5 ft	99			
113138	95.7 to 103.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
113139	105.1 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
113140	114.8 to 121.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
113141	122.5 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
113126	130.8 to 131.8 feet	**Vertical Change**	1.5"	5 ft	5	REF		
113142	136.5 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
113143	145.5 to 159.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
113157	159.1 to 178.3 feet	Key Note Segment		5 ft	96			
113127	178.6 to 179.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
113144	179.8 to 185.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
113158	185.8 to 204.9 feet	Key Note Segment		5 ft	96			
113145	206.3 to 208.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
113146	208.3 to 239.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
113147	241.2 to 257.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
113129	243.7 to 244.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
113130	256.8 to 257.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
113148	260.7 to 270.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
113159	271.8 to 291.1 feet	Key Note Segment		5 ft	97			
113149	293.7 to 297.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
113160	297.2 to 316.3 feet	Key Note Segment		5 ft	96			
113131	298.0 to 299.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
113132	307.6 to 308.6 feet	**Vertical Change**	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281451	CONCORD AVE	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113150	318.1 to 352.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	172	SF	$120	**$20,700**
113133	333.0 to 334.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
113134	341.9 to 342.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
113161	354.1 to 373.1 feet	Key Note Segment		5 ft	95			
113151	374.8 to 378.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
113152	380.4 to 385.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
113153	385.8 to 387.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
113154	389.4 to 397.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: E *side of* **CONCORD AVE** *Starting at:* **GARY LN** **$139,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281535	CONCORD AVE	GARY LN	HELENA WAY	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113540	0.1 to 27.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
113541	32.3 to 34.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
113569	34.5 to 49.3 feet	Key Note Segment		5 ft	74			
113542	49.3 to 59.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
113570	60.6 to 74.1 feet	Key Note Segment		5 ft	67			
113543	74.8 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**
113521	88.3 to 89.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
113522	101.2 to 102.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113571	113.2 to 127.4 feet	Key Note Segment		5 ft	71			
113523	129.1 to 130.1 feet	**Vertical Change**	3.66"	5 ft	5	SF	$75	**$375**
113544	131.8 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
113524	135.7 to 136.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
113545	140.4 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	257	SF	$120	**$30,840**
113525	142.0 to 143.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
113572	192.9 to 207.0 feet	Key Note Segment		5 ft	71			
113526	193.8 to 194.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
113546	207.4 to 209.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
113547	211.8 to 219.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
113573	219.0 to 232.6 feet	Key Note Segment		5 ft	68			
113548	232.6 to 262.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	150	SF	$40	**$5,980**
113527	259.9 to 260.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
113549	263.6 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
113574	298.1 to 311.9 feet	Key Note Segment		5 ft	69			
113550	312.2 to 322.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
113575	323.9 to 340.4 feet	Key Note Segment		5 ft	83			
113528	324.3 to 325.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
113529	338.4 to 339.4 feet	**Vertical Change**	1.68"	5 ft	5	REF		
113551	342.8 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281535	CONCORD AVE	GARY LN	HELENA WAY	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113530	346.1 to 347.1 feet	Vertical Change	1.9"	5 ft	5	SF	$75	$375
113531	352.7 to 353.7 feet	Vertical Change	-1.7"	5 ft	5	SF	$75	$375
113532	359.1 to 360.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
113533	364.7 to 367.6 feet	Vertical Change	.33"	5 ft	15	LF	$75	$1,088
113552	369.1 to 388.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,460
113534	378.6 to 379.6 feet	Vertical Change	-.38"	5 ft	5	REF		
113553	390.7 to 402.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
113535	396.8 to 397.8 feet	Vertical Change	.31"	5 ft	5	REF		
113576	403.7 to 417.5 feet	Key Note Segment		5 ft	69			
113554	417.5 to 425.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	38	SF	$40	$1,520
113577	429.1 to 442.8 feet	Key Note Segment		5 ft	69			
113555	442.8 to 468.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	127	SF	$40	$5,080
113556	473.5 to 507.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	$20,340
113578	507.8 to 521.3 feet	Key Note Segment		5 ft	67			
113536	509.9 to 510.9 feet	Vertical Change	1.98"	5 ft	5	REF		
113557	521.5 to 530.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,640
113558	532.3 to 533.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
113579	533.8 to 547.6 feet	Key Note Segment		5 ft	69			
113559	547.6 to 550.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	16	SF	$40	$620
113560	556.8 to 576.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,520
113561	579.7 to 582.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,620
113562	583.3 to 596.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
113563	599.6 to 607.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,740
113564	610.0 to 612.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
113580	612.8 to 627.8 feet	Key Note Segment		5 ft	75			
113537	628.3 to 629.3 feet	Vertical Change	-.34"	5 ft	5	REF		
113565	628.6 to 633.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
113566	635.5 to 639.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281535	CONCORD AVE	GARY LN	HELENA WAY	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113581	639.7 to 654.4 feet	Key Note Segment		5 ft	73			
113567	661.2 to 664.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
113538	665.2 to 666.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
113539	667.6 to 673.4 feet	**Vertical Change**	.26"	5 ft	29	LF	$75	**$2,175**
113568	670.1 to 673.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: W *side of* **CONCORD AVE** *Starting at:* **GARY LN** **$203,132.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281541	CONCORD AVE	HELENA WAY	GARY LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113605	2.3 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
113606	9.2 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
113582	11.7 to 12.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
113607	16.6 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
113644	25.7 to 39.3 feet	Key Note Segment		5 ft	68			
113583	34.0 to 35.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
113608	40.3 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
113645	51.9 to 65.1 feet	Key Note Segment		5 ft	66			
113609	66.4 to 68.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
113610	68.6 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
113584	72.5 to 73.5 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
113611	75.8 to 101.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,300**
113585	100.0 to 101.0 feet	**Vertical Change**	2.5"	5 ft	5	REF		
113612	101.6 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
113657	107.8 to 108.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
113586	116.4 to 117.4 feet	**Vertical Change**	2.73"	5 ft	5	REF		
113646	130.2 to 144.2 feet	Key Note Segment		5 ft	70			
113613	144.2 to 148.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	23	SF	$40	**$900**
113614	150.8 to 156.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,180**
113588	151.6 to 152.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
113647	156.1 to 170.3 feet	Key Note Segment		5 ft	71			
113589	157.8 to 158.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
113615	170.3 to 173.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
113590	174.8 to 175.8 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
113616	176.8 to 179.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
113617	180.0 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
113618	186.0 to 211.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,360**
113592	194.9 to 195.9 feet	**Vertical Change**	.54"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281541	CONCORD AVE	HELENA WAY	GARY LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113593	206.6 to 207.6 feet	Vertical Change	.43"	5 ft	5	REF		
113619	214.6 to 236.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	$12,900
113648	236.1 to 250.1 feet	Key Note Segment		5 ft	70			
113620	250.3 to 254.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	23	SF	$40	$920
113594	250.9 to 251.9 feet	Vertical Change	-.38"	5 ft	5	REF		
113595	255.9 to 256.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
113621	258.8 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
113596	264.6 to 265.6 feet	Vertical Change	.27"	5 ft	5	REF		
113622	267.7 to 276.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$4,980
113623	276.3 to 288.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,320
113649	289.4 to 303.3 feet	Key Note Segment		5 ft	70			
113624	305.1 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,160
113625	325.8 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,600
113650	341.8 to 355.8 feet	Key Note Segment		5 ft	70			
113598	344.6 to 345.6 feet	Vertical Change	.82"	5 ft	5	REF		
113599	355.8 to 356.8 feet	Vertical Change	2.69"	5 ft	5	REF		
113626	358.7 to 365.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,080
113600	362.7 to 363.7 feet	Vertical Change	.27"	5 ft	5	REF		
113651	365.9 to 380.0 feet	Key Note Segment		5 ft	71			
113601	366.7 to 367.7 feet	Vertical Change	-2.58"	5 ft	5	REF		
113627	381.3 to 383.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
113628	384.3 to 393.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
113629	396.9 to 432.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	$21,120
113630	434.3 to 435.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
113631	435.4 to 441.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
113632	442.3 to 445.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
113652	446.1 to 459.8 feet	Key Note Segment		5 ft	69			
113633	460.3 to 471.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	58	SF	$40	$2,300

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281541	CONCORD AVE	HELENA WAY	GARY LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113653	471.9 to 486.2 feet	Key Note Segment		5 ft	72			
113602	486.6 to 487.6 feet	Vertical Change	.26"	5 ft	5	REF		
113634	486.8 to 527.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,660**
113603	525.5 to 526.5 feet	Vertical Change	.56"	5 ft	5	REF		
113635	534.9 to 550.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
113654	551.2 to 564.7 feet	Key Note Segment		5 ft	68			
113636	564.7 to 567.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	**$640**
113637	571.4 to 576.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
113604	571.9 to 572.9 feet	Vertical Change	.42"	5 ft	5	REF		
113638	576.0 to 594.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
113639	597.4 to 603.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
113655	603.6 to 618.3 feet	Key Note Segment		5 ft	73			
113640	618.3 to 629.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	58	SF	$40	**$2,300**
113656	632.3 to 647.1 feet	Key Note Segment		5 ft	74			
113641	647.1 to 649.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	**$520**
113642	650.5 to 665.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
113643	670.4 to 681.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**

TOTAL COST FOR: E *side of* **CONCORD AVE** *Starting at:* **HELENA WAY** **$233,579.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281445	CONCORD AVE	MADRID LN	1134 CONCORD AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113100	0.0 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
113098	11.6 to 12.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
113101	12.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
113108	19.8 to 39.1 feet	Key Note Segment		5 ft	97			
113099	29.7 to 30.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
113102	40.0 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
113103	44.0 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
113109	46.3 to 64.8 feet	Key Note Segment		5 ft	93			
113104	65.8 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
113105	76.8 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
113106	105.8 to 120.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
113110	120.4 to 140.0 feet	Key Note Segment		5 ft	98			
113107	142.3 to 145.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: W *side of* **CONCORD AVE** *Starting at:* **MADRID LN** **$47,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211547	CONCORD CT	1476 CONCORD CT	PECAN AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80387	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
80390	6.8 to 27.8 feet	Key Note Segment		5 ft	105			
80386	7.5 to 8.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
80388	28.9 to 32.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
80391	32.5 to 53.3 feet	Key Note Segment		5 ft	104			
80389	55.5 to 85.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	**$17,880**

TOTAL COST FOR: W *side of* **CONCORD CT** *Starting at:* **1476 CONCORD CT** **$23,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2110211546	CONCORD CT	PECAN AVE	1476 CONCORD CT	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80362	0.0 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
80363	18.8 to 27.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
80364	29.5 to 31.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
80380	31.7 to 52.1 feet	Key Note Segment		5 ft	102			
80353	49.6 to 50.6 feet	**Vertical Change**	-.67"	5 ft	5	REF		
80365	52.1 to 53.7 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	8	SF	$40	**$320**
80366	54.9 to 56.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
80381	56.7 to 76.9 feet	Key Note Segment		5 ft	101			
80367	76.9 to 98.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	109	SF	$40	**$4,360**
80368	98.7 to 128.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,640**
80354	105.6 to 106.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
80382	129.4 to 150.2 feet	Key Note Segment		5 ft	104			
80369	151.0 to 152.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
80370	153.6 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
80355	161.7 to 162.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
80371	172.9 to 174.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
80383	174.2 to 194.3 feet	Key Note Segment		5 ft	101			
80356	184.1 to 185.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
80357	192.3 to 193.3 feet	**Vertical Change**	.55"	5 ft	5	REF		
80372	196.5 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80373	202.9 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
80384	218.5 to 239.8 feet	Key Note Segment		5 ft	107			
80358	220.0 to 221.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
80374	240.6 to 282.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,260**
80359	279.3 to 280.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
80375	282.7 to 293.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
80360	293.4 to 294.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
80376	294.8 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2110211546	CONCORD CT	PECAN AVE	1476 CONCORD CT	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80361	297.2 to 298.2 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
80377	300.8 to 304.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
80385	305.0 to 325.0 feet	Key Note Segment		5 ft	100			
80378	325.0 to 339.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	75	SF	$40	$2,980
80379	339.9 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440

TOTAL COST FOR: E/N/W *side of* **CONCORD CT** *Starting at:* **PECAN AVE** **$96,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111651	CONDOR DR	2558 CONDOR DR	2558 CONDOR DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133975	14.2 to 15.2 feet	Vertical Change	.48"	4 ft	4	LF	$75	**$300**
133977	31.3 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
133978	87.4 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
133979	100.3 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	101	SF	$120	**$12,096**

TOTAL COST FOR: W *side of* **CONDOR DR** *Starting at:* **2558 CONDOR DR** **$16,188.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111652	CONDOR DR	2558 CONDOR DR	2558 CONDOR DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133983	0.4 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
133984	13.9 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
133980	14.6 to 15.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
133985	22.8 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
133986	30.7 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
133981	31.5 to 32.5 feet	**Vertical Change**	-.26"	4 ft	4	REF		
133987	48.4 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
133982	54.5 to 55.5 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
133988	56.8 to 70.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,384**
133989	73.4 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
133990	77.3 to 78.9 feet		5.0-6.0%	4 ft	6			

TOTAL COST FOR: W *side of* **CONDOR DR** *Starting at:* **2558 CONDOR DR** **$17,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111654	CONDOR DR	2558 CONDOR DR	PARKING LOT ENTRANCE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134000	0.8 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,312**
133991	5.6 to 6.6 feet	**Vertical Change**	.34"	4 ft	4	REF		
133992	14.1 to 15.1 feet	**Vertical Change**	.6"	4 ft	4	REF		
133993	31.1 to 32.1 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
134001	35.5 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,920**
134002	60.3 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,288**
133994	74.2 to 75.2 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
134003	77.5 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
133995	82.7 to 83.7 feet	**Vertical Change**	-.28"	4 ft	4	REF		
134004	86.1 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	157	SF	$120	**$18,816**
133996	91.3 to 92.3 feet	**Vertical Change**	.26"	4 ft	4	REF		
133997	117.2 to 118.2 feet	**Vertical Change**	.34"	4 ft	4	REF		
134005	128.2 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
134006	137.5 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,240**
133998	143.0 to 144.0 feet	**Vertical Change**	-.26"	4 ft	4	REF		
134007	153.6 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
133999	160.3 to 161.3 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
134008	161.4 to 167.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
134009	172.3 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
134010	187.8 to 189.3 feet		5.0-6.0%	4 ft	6			

TOTAL COST FOR: W *side of* **CONDOR DR** *Starting at:* **2558 CONDOR DR** **$62,916.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081419	COOLIDGE ST	1772 COOLIDGE ST	PIERCE LN	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127165	0.4 to 16.3 feet	Key Note Segment		5 ft	80			
127158	18.3 to 19.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
127159	19.9 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
127160	50.3 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
127161	56.8 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
127162	69.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
127151	75.7 to 76.7 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
127166	76.1 to 94.4 feet	Key Note Segment		5 ft	92			
127167	102.4 to 120.2 feet	Key Note Segment		5 ft	89			
127152	107.9 to 108.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
127153	114.0 to 115.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
127163	124.1 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,860**
127168	152.8 to 171.7 feet	Key Note Segment		5 ft	94			
127154	153.7 to 154.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
127155	159.7 to 160.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
127156	172.2 to 173.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
127164	184.4 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
127169	194.6 to 195.8 feet		5.0-6.0%	5 ft	6			
127157	196.0 to 197.0 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **COOLIDGE ST** *Starting at:* **1772 COOLIDGE ST** **$49,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081250	COOLIDGE ST	1835 COOLIDGE ST	HOOVER AVE	16

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126670	0.0 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
126669	7.9 to 8.9 feet	**Vertical Change**	.5"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **COOLIDGE ST** *Starting at:* **1835 COOLIDGE ST** **$4,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081417	COOLIDGE ST	EISENHOWER LN	1784 COOLIDGE ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127134	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
127135	4.6 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
127126	17.1 to 18.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
127146	25.7 to 43.9 feet	Key Note Segment		5 ft	91			
127136	46.5 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
127147	52.3 to 70.6 feet	Key Note Segment		5 ft	91			
127137	71.8 to 92.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,660**
127138	93.9 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
127139	105.5 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
127127	121.0 to 122.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
127148	129.3 to 148.7 feet	Key Note Segment		5 ft	97			
127128	129.6 to 130.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
127129	144.9 to 145.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
127130	148.3 to 149.3 feet	**Vertical Change**	-.59"	5 ft	5	REF		
127140	151.3 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
127131	155.1 to 156.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
127149	155.3 to 174.0 feet	Key Note Segment		5 ft	93			
127141	174.9 to 188.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
127142	190.1 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
127143	206.5 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
127144	217.5 to 232.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
127150	232.2 to 250.4 feet	Key Note Segment		5 ft	91			
127132	233.0 to 234.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
127133	237.0 to 238.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
127145	252.8 to 254.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: W *side of* **COOLIDGE ST** *Starting at:* **EISENHOWER LN** **$81,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081244	COOLIDGE ST	HOOVER AVE	TYLER LN	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126587	1.5 to 15.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
126570	7.0 to 8.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
126588	18.1 to 22.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
126617	23.9 to 42.6 feet	Key Note Segment		5 ft	94			
126571	36.6 to 37.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
126572	42.7 to 43.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
126589	43.6 to 44.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
126618	50.6 to 67.6 feet	Key Note Segment		5 ft	85			
126573	56.0 to 57.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
126574	62.3 to 63.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
126590	72.8 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
126591	76.8 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
126576	86.2 to 87.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
126592	86.8 to 117.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	152	SF	$120	**$18,240**
126577	94.8 to 95.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
126593	117.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
126578	122.4 to 123.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
126594	128.0 to 129.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
126619	129.8 to 147.3 feet	Key Note Segment		5 ft	88			
126595	149.7 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
126579	155.5 to 156.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
126620	156.3 to 173.5 feet	Key Note Segment		5 ft	86			
126580	168.1 to 169.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
126596	175.2 to 178.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
126597	180.9 to 185.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
126598	188.3 to 197.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
126581	191.4 to 192.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
126599	200.8 to 207.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081244	COOLIDGE ST	HOOVER AVE	TYLER LN	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126600	207.0 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
126621	234.2 to 253.8 feet	Key Note Segment		5 ft	98			
126601	255.2 to 260.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
126622	260.4 to 278.9 feet	Key Note Segment		5 ft	93			
126582	273.4 to 274.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
126583	279.5 to 280.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
126602	280.8 to 281.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
126603	281.9 to 292.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
126604	298.9 to 301.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
126605	302.6 to 310.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
126606	313.8 to 315.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
126607	317.5 to 321.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
126608	321.6 to 336.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
126623	339.0 to 357.9 feet	Key Note Segment		5 ft	95			
126609	363.2 to 364.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126624	366.2 to 384.3 feet	Key Note Segment		5 ft	91			
126584	375.9 to 376.9 feet	**Vertical Change**	1.11"	5 ft	5	REF		
126610	385.9 to 386.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
126611	389.0 to 390.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
126612	392.5 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
126613	410.9 to 417.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
126625	417.9 to 436.4 feet	Key Note Segment		5 ft	93			
126614	439.6 to 445.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
126615	445.3 to 456.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
126586	447.0 to 448.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
126616	456.8 to 464.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: W *side of* **COOLIDGE ST** *Starting at:* **HOOVER AVE** **$136,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081423	COOLIDGE ST	PIERCE LN	EISENHOWER LN	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127175	0.0 to 22.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**
127197	22.3 to 41.8 feet	Key Note Segment		5 ft	98			
127176	44.3 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
127177	48.4 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
127178	52.6 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
127198	74.3 to 93.3 feet	Key Note Segment		5 ft	95			
127170	93.7 to 94.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
127179	95.0 to 96.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
127180	96.1 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
127199	100.7 to 119.8 feet	Key Note Segment		5 ft	96			
127171	107.2 to 108.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
127181	129.8 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
127182	137.5 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
127172	152.5 to 153.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
127183	160.8 to 177.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,260**
127200	178.5 to 197.2 feet	Key Note Segment		5 ft	94			
127201	204.5 to 222.8 feet	Key Note Segment		5 ft	92			
127173	225.2 to 226.2 feet	**Vertical Change**	3.5"	5 ft	5	SF	$75	**$375**
127184	228.1 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
127185	241.8 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
127186	257.3 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
127187	273.4 to 281.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
127202	282.2 to 300.4 feet	Key Note Segment		5 ft	91			
127188	302.8 to 307.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
127203	307.6 to 326.4 feet	Key Note Segment		5 ft	94			
127189	328.1 to 345.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
127190	349.7 to 352.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
127191	352.1 to 373.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081423	COOLIDGE ST	PIERCE LN	EISENHOWER LN	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127192	373.9 to 383.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
127204	385.2 to 403.7 feet	Key Note Segment		5 ft	93			
127193	405.5 to 410.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
127174	407.9 to 408.9 feet	**Vertical Change**	3.21"	5 ft	5	REF		
127205	411.1 to 429.7 feet	Key Note Segment		5 ft	93			
127194	431.4 to 436.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
127195	437.4 to 444.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
127196	444.9 to 457.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**

TOTAL COST FOR: E *side of* **COOLIDGE ST** *Starting at:* **PIERCE LN** **$129,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081249	COOLIDGE ST	TYLER LN	1835 COOLIDGE ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126638	0.3 to 22.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
126639	23.6 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126660	25.1 to 43.9 feet	Key Note Segment		5 ft	94			
126626	26.0 to 27.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
126640	49.2 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
126627	53.6 to 54.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
126641	69.2 to 71.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
126642	72.2 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
126661	78.3 to 96.8 feet	Key Note Segment		5 ft	93			
126662	104.5 to 122.4 feet	Key Note Segment		5 ft	90			
126643	124.1 to 130.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
126644	134.2 to 183.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	248	SF	$120	**$29,700**
126629	166.0 to 167.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
126630	174.9 to 175.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
126631	183.5 to 184.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
126663	184.1 to 202.1 feet	Key Note Segment		5 ft	90			
126632	196.8 to 200.5 feet	**Vertical Change**	.34"	5 ft	19	REF		
126633	201.4 to 202.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
126645	206.6 to 207.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
126634	207.2 to 208.2 feet	**Vertical Change**	1.3"	5 ft	5	REF		
126664	209.7 to 228.2 feet	Key Note Segment		5 ft	93			
126646	230.3 to 253.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
126647	255.8 to 269.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
126648	269.7 to 270.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
126649	272.3 to 278.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
126650	279.3 to 287.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
126665	288.1 to 307.4 feet	Key Note Segment		5 ft	96			
126651	308.6 to 309.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081249	COOLIDGE ST	TYLER LN	1835 COOLIDGE ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126666	310.5 to 337.2 feet	Key Note Segment		5 ft	134			
126635	317.3 to 318.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
126652	337.5 to 338.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
126653	341.0 to 356.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
126654	358.9 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
126655	384.1 to 393.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
126667	394.2 to 412.3 feet	Key Note Segment		5 ft	91			
126636	412.9 to 413.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
126656	413.5 to 414.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
126657	414.8 to 418.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
126668	420.3 to 438.8 feet	Key Note Segment		5 ft	93			
126637	420.4 to 421.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
126658	440.4 to 441.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
126659	441.5 to 449.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: E *side of* **COOLIDGE ST** *Starting at:* **TYLER LN** **$134,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191155	CORONA DR	LA COSTA CT	LOMA LINDA LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73773	0.5 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
73774	5.4 to 12.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
73775	12.3 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
73772	12.9 to 13.9 feet	Vertical Change	-.47"	5 ft	5	REF		
73776	20.4 to 25.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
73777	29.3 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,900**
73778	36.2 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
73779	41.3 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
73780	53.1 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,500**
73781	81.7 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
73782	90.4 to 110.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
73783	116.3 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
73784	127.6 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
73785	140.8 to 162.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
73786	166.3 to 181.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
73787	184.1 to 186.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
73788	186.8 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
73789	194.1 to 201.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
73790	205.5 to 218.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
73791	224.3 to 226.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
73792	226.5 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73793	232.3 to 236.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: E *side of* **CORONA DR** *Starting at:* **LA COSTA CT** **$106,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191146	CORONA DR	LOMA LINDA LN	VERDE MESA WAY	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73697	3.5 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
73698	6.7 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
73699	10.2 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
73700	13.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
73725	16.2 to 36.1 feet	Key Note Segment		5 ft	100			
73689	16.6 to 17.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
73701	36.2 to 37.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
73702	39.6 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
73690	58.9 to 59.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
73703	61.2 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
73704	66.4 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
73726	72.0 to 90.7 feet	Key Note Segment		5 ft	94			
73691	82.2 to 83.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
73705	91.4 to 98.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,360**
73727	98.4 to 118.0 feet	Key Note Segment		5 ft	98			
73706	119.2 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
73707	145.1 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
73708	153.3 to 181.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	139	SF	$120	**$16,680**
73728	181.1 to 201.3 feet	Key Note Segment		5 ft	101			
73692	182.2 to 183.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
73693	191.3 to 192.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
73709	206.3 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
73729	207.8 to 227.7 feet	Key Note Segment		5 ft	100			
73710	228.8 to 229.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
73711	231.3 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
73712	235.5 to 287.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	259	SF	$120	**$31,020**
73694	252.9 to 253.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
73713	289.3 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191146	CORONA DR	LOMA LINDA LN	VERDE MESA WAY	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73730	291.3 to 310.8 feet	Key Note Segment		5 ft	98			
73731	318.2 to 338.4 feet	Key Note Segment		5 ft	101			
73714	339.3 to 340.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
73715	344.7 to 351.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
73716	351.9 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
73717	355.8 to 366.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
73718	366.3 to 372.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
73719	372.6 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
73720	387.5 to 391.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
73695	389.1 to 390.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
73721	393.8 to 402.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
73732	402.1 to 422.4 feet	Key Note Segment		5 ft	102			
73733	428.3 to 448.5 feet	Key Note Segment		5 ft	101			
73722	448.7 to 453.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
73723	456.2 to 459.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
73696	456.8 to 457.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
73724	461.6 to 466.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
73734	468.6 to 470.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **CORONA DR** *Starting at:* **LOMA LINDA LN** **$111,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191148	CORONA DR	VERDE MESA WAY	LA COSTA CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73735	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
73736	5.3 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,740**
73737	43.6 to 55.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
73738	57.6 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**
73739	84.4 to 89.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
73740	93.2 to 95.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
73741	98.0 to 105.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
73742	107.3 to 156.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	248	SF	$120	**$29,760**
73743	156.9 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **CORONA DR** *Starting at:* **VERDE MESA WAY** **$85,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201441	COSENTINO DR	976 COSENTINO DR	ST. MICHELLE DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76937	0.4 to 20.6 feet	Key Note Segment		5 ft	101			
76925	7.8 to 8.8 feet	Vertical Change	1.15"	5 ft	5	REF		
76927	21.6 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
76938	26.6 to 47.3 feet	Key Note Segment		5 ft	104			
76928	48.3 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
76929	51.7 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
76930	58.3 to 63.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
76931	65.3 to 75.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
76926	68.8 to 69.8 feet	Vertical Change	.26"	5 ft	5	REF		
76939	76.4 to 98.9 feet	Key Note Segment		5 ft	112			
76932	100.8 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
76933	115.7 to 121.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
76934	124.3 to 125.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
76935	125.6 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
76936	129.5 to 131.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: W *side of* **COSENTINO DR** *Starting at:* **976 COSENTINO DR** **$28,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201516	COSENTINO DR	FICKLIN DR	ST JULIEN DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77250	5.6 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
77251	16.1 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
77243	29.7 to 30.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
77252	33.0 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
77244	38.2 to 39.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77253	46.3 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
77245	46.9 to 47.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
77246	55.5 to 56.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
77247	64.1 to 65.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
77254	79.4 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
77255	85.6 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
77256	102.4 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
77248	104.3 to 105.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77257	112.3 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
77258	120.5 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
77259	129.9 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
77260	149.2 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
77249	151.6 to 152.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **COSENTINO DR** *Starting at:* **FICKLIN DR** **$62,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201439	COSENTINO DR	QUADY LN	976 COSENTINO DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76920	0.2 to 23.3 feet	Key Note Segment		5 ft	116			
76892	0.6 to 1.6 feet	Vertical Change	-.27"	5 ft	5	REF		
76893	7.8 to 8.8 feet	Vertical Change	.28"	5 ft	5	REF		
76894	15.2 to 16.2 feet	Vertical Change	.3"	5 ft	5	REF		
76903	23.7 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
76895	29.1 to 30.1 feet	Vertical Change	-.51"	5 ft	5	REF		
76904	31.3 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
76905	51.2 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
76906	56.5 to 68.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
76907	69.3 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
76908	74.9 to 80.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
76921	80.9 to 101.9 feet	Key Note Segment		5 ft	105			
76896	87.5 to 88.5 feet	Vertical Change	.33"	5 ft	5	REF		
76909	105.1 to 107.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
76922	107.2 to 128.2 feet	Key Note Segment		5 ft	105			
76897	109.0 to 110.0 feet	Vertical Change	.29"	5 ft	5	REF		
76898	114.3 to 115.3 feet	Vertical Change	.27"	5 ft	5	REF		
76910	129.6 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
76899	138.6 to 142.6 feet	Vertical Change	.53"	5 ft	20	REF		
76911	143.5 to 161.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,620**
76912	161.8 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
76913	167.8 to 174.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
76914	174.3 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
76900	175.8 to 176.8 feet	Vertical Change	-.39"	5 ft	5	REF		
76923	183.8 to 205.3 feet	Key Note Segment		5 ft	108			
76915	206.2 to 208.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
76916	208.9 to 211.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
76924	211.4 to 231.5 feet	Key Note Segment		5 ft	101			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201439	COSENTINO DR	QUADY LN	976 COSENTINO DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76902	217.8 to 218.8 feet	Vertical Change	.55"	5 ft	5	REF		
76917	233.8 to 253.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
76918	253.4 to 269.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
76919	273.2 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: W *side of* **COSENTINO DR** *Starting at:* **QUADY LN** **$81,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201530	COSENTINO DR	ST JULIEN DR	ST. MICHELLE DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77375	7.0 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
77376	21.3 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
77377	50.7 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
77374	66.0 to 67.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
77378	78.9 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
77379	90.8 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
77380	112.9 to 130.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
77381	139.4 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
77382	154.7 to 157.5 feet		5.0-6.0%	5 ft	14			
77383	154.7 to 157.5 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **COSENTINO DR** *Starting at:* **ST JULIEN DR** **$70,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201542	COSENTINO DR	ST. MICHELLE DR	ST. MONTELENA DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77499	4.4 to 33.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
77500	37.3 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
77498	68.1 to 69.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
77501	74.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
77502	91.8 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	175	SF	$120	**$21,000**
77503	130.9 to 141.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**

TOTAL COST FOR: E *side of* **COSENTINO DR** *Starting at:* **ST. MICHELLE DR** **$74,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201447	COSENTINO DR	ST. MICHELLE DR	FICKLIN DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76958	0.0 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
76959	20.1 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
76945	38.1 to 39.1 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
76973	46.7 to 66.1 feet	Key Note Segment		5 ft	97			
76946	60.1 to 61.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
76960	70.3 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
76961	80.2 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
76947	86.4 to 87.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
76974	99.7 to 120.2 feet	Key Note Segment		5 ft	103			
76948	110.6 to 111.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
76962	121.4 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
76975	123.8 to 145.2 feet	Key Note Segment		5 ft	107			
76949	133.2 to 134.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
76963	145.3 to 147.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
76964	147.3 to 163.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
76965	171.7 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
76950	177.8 to 178.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
76966	178.3 to 185.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
76976	186.0 to 206.9 feet	Key Note Segment		5 ft	105			
76977	209.3 to 239.9 feet	Key Note Segment		5 ft	153			
76967	240.1 to 282.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	212	SF	$40	**$8,480**
76952	280.7 to 281.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
76978	282.5 to 303.6 feet	Key Note Segment		5 ft	106			
76968	304.8 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
76969	315.7 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
76953	327.1 to 328.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
76954	335.5 to 336.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
76979	342.3 to 364.1 feet	Key Note Segment		5 ft	109			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201447	COSENTINO DR	ST. MICHELLE DR	FICKLIN DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76955	351.2 to 352.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
76970	365.9 to 388.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
76956	383.0 to 384.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
76971	389.2 to 392.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
76980	394.3 to 421.8 feet	Key Note Segment		5 ft	138			
76972	423.2 to 425.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: W *side of* **COSENTINO DR** *Starting at:* **ST. MICHELLE DR** **$81,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201555	COSENTINO DR	ST. MONTELENA DR	QUADY LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77643	0.0 to 10.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
77644	10.1 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
77645	27.4 to 48.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
77638	33.3 to 34.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77646	49.0 to 57.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	41	SF	$120	**$4,860**
77647	57.9 to 82.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	122	SF	$120	**$14,580**
77639	84.2 to 85.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77648	84.3 to 95.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
77640	90.3 to 91.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
77649	97.3 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
77650	106.9 to 110.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
77641	110.0 to 111.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
77651	110.6 to 113.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
77652	115.5 to 116.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
77653	116.8 to 142.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	126	SF	$120	**$15,120**
77642	121.7 to 122.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
77654	142.0 to 146.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
77655	146.3 to 148.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
77656	151.6 to 154.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: E *side of* **COSENTINO DR** *Starting at:* **ST. MONTELENA DR** **$85,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011046	COUNTRY CLUB DR	1341 COUNTRY CLUB DR	1341 COUNTRY CLUB DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115793	0.0 to 1.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$960**
115794	3.6 to 41.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	306	SF	$120	**$36,672**
115790	15.2 to 16.2 feet	**Vertical Change**	.74"	8 ft	8	REF		
115791	18.9 to 19.9 feet	**Vertical Change**	-.43"	8 ft	8	REF		
115795	41.8 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	28	SF	$120	**$3,360**
115792	42.1 to 43.1 feet	**Vertical Change**	.27"	8 ft	8	REF		
115796	47.0 to 50.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	30	SF	$120	**$3,648**
115797	53.1 to 56.7 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	29	SF	$120	**$3,456**
115798	57.7 to 60.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	22	SF	$120	**$2,592**
115799	61.6 to 79.0 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	139	SF	$120	**$16,704**
115800	79.6 to 83.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	29	SF	$120	**$3,456**
115801	87.2 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	153	SF	$120	**$18,336**
115802	111.9 to 113.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,344**
115803	117.9 to 135.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	138	SF	$120	**$16,512**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **1341 COUNTRY CLUB DR** **$107,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011135	COUNTRY CLUB DR	1410 COUNTRY CLUB DR	1410 COUNTRY CLUB DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116114	3.1 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
116115	11.0 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
116116	20.6 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
116117	34.7 to 38.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
116118	48.2 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
116119	55.0 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
116113	63.4 to 64.4 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
116120	67.1 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **1410 COUNTRY CLUB DR** **$23,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011140	COUNTRY CLUB DR	1410 COUNTRY CLUB DR	W SHERWOOD WAY	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116128	0.0 to 23.2 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	186	SF	$120	**$22,272**
116129	23.2 to 31.8 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	69	SF	$120	**$8,256**
116130	32.8 to 42.8 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	80	SF	$120	**$9,600**
116131	43.3 to 44.7 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	11	SF	$120	**$1,344**
116152	44.7 to 71.3 feet	Key Note Segment		8 ft	213			
116121	45.2 to 46.2 feet	**Vertical Change**	-.31"	8 ft	8	REF		
116122	47.4 to 48.4 feet	**Vertical Change**	.3"	8 ft	8	REF		
116132	74.8 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	280	SF	$120	**$33,600**
116123	84.6 to 85.6 feet	**Vertical Change**	-.42"	8 ft	8	REF		
116133	110.1 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	70	SF	$120	**$8,448**
116124	122.4 to 123.4 feet	**Vertical Change**	-.26"	8 ft	8	LF	$75	**$600**
116134	130.4 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,168**
116153	133.8 to 159.7 feet	Key Note Segment		8 ft	207			
116125	147.1 to 148.1 feet	**Vertical Change**	-.27"	8 ft	8	REF		
116135	161.2 to 162.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$960**
116154	164.2 to 190.8 feet	Key Note Segment		8 ft	213			
116136	190.8 to 205.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	118	SF	$40	**$4,736**
116126	191.3 to 192.3 feet	**Vertical Change**	-.27"	8 ft	8	REF		
116137	208.3 to 211.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	24	SF	$120	**$2,880**
116138	211.3 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	62	SF	$120	**$7,488**
116139	223.6 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,888**
116140	256.2 to 260.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,032**
116141	265.1 to 272.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	59	SF	$120	**$7,104**
116142	272.7 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,896**
116143	283.6 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	306	SF	$120	**$36,672**
116144	325.3 to 335.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	83	SF	$120	**$9,984**
116145	336.1 to 369.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	268	SF	$120	**$32,160**
116155	369.8 to 401.5 feet	Key Note Segment		8 ft	254			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011140	COUNTRY CLUB DR	1410 COUNTRY CLUB DR	W SHERWOOD WAY	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116127	386.5 to 387.5 feet	Vertical Change	2.46"	8 ft	8	REF		
116146	401.5 to 405.7 feet	Cross Slope (Driveway)	3.0-4.0%	8 ft	34	SF	$40	**$1,344**
116147	406.9 to 408.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,728**
116148	410.9 to 420.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	78	SF	$120	**$9,312**
116149	423.5 to 438.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	122	SF	$120	**$14,688**
116150	442.9 to 447.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	40	SF	$120	**$4,800**
116151	464.3 to 467.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	**$2,784**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **1410 COUNTRY CLUB DR** **$242,744.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011050	COUNTRY CLUB DR	1475 COUNTRY CLUB DR	W CLARK ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115810	1.8 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	76	SF	$120	**$9,120**
115811	14.2 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	81	SF	$120	**$9,696**
115812	26.8 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	262	SF	$120	**$31,392**
115813	63.3 to 73.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,888**
115814	78.9 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	75	SF	$120	**$9,024**
115804	82.5 to 83.5 feet	**Vertical Change**	.95"	8 ft	8	REF		
115815	92.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	108	SF	$120	**$12,960**
115816	110.2 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	288	SF	$120	**$34,560**
115817	150.8 to 164.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	109	SF	$120	**$13,056**
115805	151.0 to 152.0 feet	**Vertical Change**	.29"	8 ft	8	REF		
115818	164.4 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	111	SF	$120	**$13,344**
115819	180.6 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,728**
115820	184.5 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	121	SF	$120	**$14,496**
115821	201.8 to 202.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$960**
115822	202.8 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,832**
115823	212.3 to 213.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	13	SF	$120	**$1,536**
115836	214.2 to 241.4 feet	Key Note Segment		8 ft	218			
115824	241.4 to 242.8 feet	**Cross Slope (Driveway)**	6.0-7.0%	8 ft	11	SF	$40	**$448**
115825	243.2 to 246.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	23	SF	$120	**$2,784**
115806	243.6 to 244.6 feet	**Vertical Change**	.26"	8 ft	8	REF		
115826	246.8 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	393	SF	$120	**$47,136**
115827	298.2 to 305.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	57	SF	$120	**$6,816**
115807	299.8 to 300.8 feet	**Vertical Change**	.26"	8 ft	8	REF		
115828	308.1 to 318.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	83	SF	$120	**$9,984**
115829	321.2 to 330.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	74	SF	$120	**$8,928**
115830	331.2 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
115831	335.2 to 340.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	41	SF	$120	**$4,896**
115832	340.3 to 348.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	65	SF	$120	**$7,776**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011050	COUNTRY CLUB DR	1475 COUNTRY CLUB DR	W CLARK ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115833	348.6 to 351.7 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	25	SF	$120	**$2,976**
115808	348.9 to 349.9 feet	**Vertical Change**	-.27"	8 ft	8	REF		
115834	352.1 to 353.2 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	9	SF	$120	**$1,056**
115809	353.6 to 354.6 feet	**Vertical Change**	.42"	8 ft	8	LF	$75	**$600**
115835	359.0 to 365.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	49	SF	$120	**$5,856**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **1475 COUNTRY CLUB DR** **$273,688.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011127	COUNTRY CLUB DR	1520 COUNTRY CLUB DR	W CLARK ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116072	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
116073	1.3 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
116069	1.9 to 2.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
116074	16.4 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
116070	46.1 to 47.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
116075	62.3 to 69.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
116076	79.0 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
116071	87.5 to 88.5 feet	**Vertical Change**	1.18"	5 ft	5	REF		
116077	87.8 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,660**
116078	135.6 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
116079	146.0 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **1520 COUNTRY CLUB DR** **$42,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011116	COUNTRY CLUB DR	1565 COUNTRY CLUB DR	1565 COUNTRY CLUB DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115988	5.7 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115989	9.7 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
115997	15.2 to 16.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
115990	18.6 to 19.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
115985	23.4 to 24.4 feet	**Vertical Change**	2.47"	5 ft	5	REF		
115991	23.7 to 28.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	25	SF	$120	**$2,940**
115992	30.9 to 32.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
115993	33.4 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	317	SF	$120	**$38,040**
115994	97.0 to 112.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
115986	112.8 to 113.8 feet	**Vertical Change**	1.33"	5 ft	5	SF	$75	**$375**
115995	115.3 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
115987	124.8 to 125.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
115996	128.0 to 161.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,920**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **1565 COUNTRY CLUB DR** **$83,094.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011118	COUNTRY CLUB DR	1565 COUNTRY CLUB DR	ADELL ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116000	2.4 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
116001	6.7 to 8.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
116002	9.2 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
116003	13.4 to 18.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
116004	22.1 to 31.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
116005	32.8 to 36.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
116006	38.9 to 40.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
116007	41.8 to 47.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,540**
115998	51.1 to 52.1 feet	**Vertical Change**	1.05"	5 ft	5	REF		
116008	51.9 to 57.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
116009	59.0 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
116010	63.2 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
116011	78.9 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
116012	88.1 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
115999	90.5 to 91.5 feet	**Vertical Change**	1.44"	5 ft	5	REF		
116013	94.6 to 98.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
116014	100.7 to 103.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
116015	106.8 to 115.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
116016	118.8 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
116017	130.9 to 136.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
116018	136.3 to 141.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **1565 COUNTRY CLUB DR** **$54,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011124	COUNTRY CLUB DR	1692 ADELL ST	1606 COUNTRY CLUB DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116057	1.3 to 18.7 feet	Key Note Segment		5 ft	87			
116019	11.6 to 12.6 feet	Vertical Change	.5"	5 ft	5	REF		
116024	19.9 to 21.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	$1,140
116025	23.0 to 25.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
116026	28.3 to 42.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	$8,760
116027	45.8 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
116028	50.4 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
116029	53.7 to 57.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,220
116030	58.3 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
116031	67.4 to 71.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,340
116032	74.2 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
116033	83.3 to 85.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
116034	85.8 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
116035	102.0 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
116036	107.8 to 112.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
116037	115.8 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
116038	122.1 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
116058	127.0 to 146.3 feet	Key Note Segment		5 ft	97			
116020	135.7 to 136.7 feet	Vertical Change	.27"	5 ft	5	REF		
116039	147.8 to 169.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	$12,720
116040	172.8 to 178.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
116041	179.8 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	$12,000
116042	208.3 to 240.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	160	SF	$120	$19,200
116059	240.3 to 262.8 feet	Key Note Segment		5 ft	113			
116021	253.1 to 254.1 feet	Vertical Change	3.08"	5 ft	5	REF		
116043	264.4 to 275.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	$6,420
116044	278.0 to 294.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	$9,900
116045	297.1 to 315.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,160

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011124	COUNTRY CLUB DR	1692 ADELL ST	1606 COUNTRY CLUB DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116046	316.3 to 349.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,620**
116047	349.0 to 364.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
116048	367.5 to 376.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
116049	377.1 to 379.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
116060	379.3 to 407.7 feet	Key Note Segment		5 ft	142			
116022	392.7 to 393.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
116023	400.1 to 401.1 feet	**Vertical Change**	.52"	5 ft	5	REF		
116050	408.2 to 409.3 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	6	SF	$40	**$220**
116051	409.7 to 412.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
116052	414.8 to 425.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
116053	425.5 to 448.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	**$13,860**
116054	451.1 to 454.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
116055	454.0 to 455.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
116056	458.0 to 459.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **1692 ADELL ST** **$182,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011125	COUNTRY CLUB DR	1692 COUNTRY CLUB DR	1692 COUNTRY CLUB DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116061	0.3 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
116062	9.0 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
116063	31.3 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
116064	41.1 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
116065	54.8 to 56.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
116066	57.7 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
116067	69.9 to 72.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
116068	73.8 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **1692 COUNTRY CLUB DR** **$37,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091451	COUNTRY CLUB DR	SHARON BVD	N GATEWAY DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54801	0.0 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	54	SF	$120	**$6,432**
54802	6.7 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,976**
54811	9.8 to 37.8 feet	Key Note Segment		8 ft	224			
54803	40.3 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	**$2,784**
54804	43.8 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	64	SF	$120	**$7,680**
54805	54.1 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	258	SF	$120	**$30,912**
54812	86.3 to 111.3 feet	Key Note Segment		8 ft	200			
54806	111.8 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	136	SF	$120	**$16,320**
54807	149.9 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,344**
54808	152.1 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,792**
54809	162.4 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	210	SF	$120	**$25,152**
54810	188.6 to 191.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,688**

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **SHARON BVD** **$106,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011115	COUNTRY CLUB DR	W CLARK ST	1565 COUNTRY CLUB DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115940	1.2 to 2.2 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
115941	3.0 to 4.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
115953	8.3 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	$8,100
115942	11.2 to 12.2 feet	Vertical Change	.77"	5 ft	5	REF		
115943	13.9 to 14.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
115954	21.8 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
115944	24.7 to 25.7 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
115955	26.5 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,180
115956	39.4 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	$14,640
115945	49.1 to 50.1 feet	Vertical Change	.29"	5 ft	5	REF		
115946	62.2 to 63.2 feet	Vertical Change	.48"	5 ft	5	REF		
115957	63.8 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,800
115958	74.2 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
115959	87.4 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
115947	88.5 to 89.5 feet	Vertical Change	-.27"	5 ft	5	REF		
115960	96.4 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
115948	101.4 to 102.4 feet	Vertical Change	.52"	5 ft	5	REF		
115961	108.9 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
115962	122.8 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
115963	140.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
115964	156.5 to 173.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
115965	175.2 to 177.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,260
115966	177.9 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
115967	192.3 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
115949	197.3 to 198.3 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
115968	205.7 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
115950	211.0 to 212.0 feet	Vertical Change	-.39"	5 ft	5	LF	$75	$375
115984	217.4 to 237.1 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011115	COUNTRY CLUB DR	W CLARK ST	1565 COUNTRY CLUB DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115969	238.0 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
115951	248.9 to 249.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
115970	259.9 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
115971	275.3 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
115972	294.9 to 300.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
115973	305.0 to 309.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
115952	315.0 to 316.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
115974	315.1 to 335.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
115975	337.3 to 338.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115976	341.3 to 348.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
115977	350.8 to 352.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
115978	357.0 to 365.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
115979	372.5 to 376.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
115980	376.3 to 377.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
115981	380.0 to 381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
115982	383.2 to 387.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
115983	387.3 to 389.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **W CLARK ST** **$137,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011134	COUNTRY CLUB DR	W CLARK ST	1410 COUNTRY CLUB DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116091	5.3 to 6.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
116096	21.2 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
116097	33.8 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	$14,400
116098	60.7 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
116099	68.0 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
116100	81.6 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
116101	96.3 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
116102	100.0 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
116103	112.7 to 114.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
116104	114.8 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
116092	124.5 to 125.5 feet	Vertical Change	.4"	5 ft	5	REF		
116105	126.5 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	$7,320
116106	138.8 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360
116107	150.1 to 155.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
116093	150.4 to 151.4 feet	Vertical Change	.28"	5 ft	5	REF		
116108	155.6 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
116094	163.0 to 164.0 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
116109	164.3 to 170.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
116095	167.8 to 168.8 feet	Vertical Change	-.27"	5 ft	5	REF		
116110	176.2 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
116111	177.7 to 178.8 feet		5.0-6.0%	5 ft	6			
116112	178.8 to 180.8 feet		6.0-7.0%	5 ft	10			

TOTAL COST FOR: W *side of* **COUNTRY CLUB DR** *Starting at:* **W CLARK ST** **$74,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091458	COUNTRY CLUB DR	W CLEVELAND AVE	W SHERWOOD WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54818	1.7 to 27.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	209	SF	$120	**$25,056**
54819	28.0 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	126	SF	$120	**$15,072**
54820	46.0 to 59.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	107	SF	$120	**$12,864**
54821	60.0 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	162	SF	$120	**$19,488**
54813	61.8 to 62.8 feet	**Vertical Change**	1.06"	8 ft	8	REF		
54822	87.3 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	150	SF	$120	**$17,952**
54823	109.7 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	194	SF	$120	**$23,232**
54849	133.9 to 167.0 feet	Key Note Segment		8 ft	265			
54824	168.5 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	136	SF	$120	**$16,320**
54825	190.3 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	122	SF	$120	**$14,688**
54814	193.9 to 194.9 feet	**Vertical Change**	.28"	8 ft	8	REF		
54826	208.9 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	67	SF	$120	**$8,064**
54827	218.7 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	122	SF	$120	**$14,688**
54828	236.3 to 240.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
54829	240.4 to 244.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	32	SF	$120	**$3,840**
54830	244.9 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	44	SF	$120	**$5,280**
54831	252.8 to 270.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	144	SF	$120	**$17,280**
54832	274.6 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,792**
54833	287.3 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$6,048**
54834	295.9 to 305.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	73	SF	$120	**$8,736**
54850	305.0 to 337.3 feet	Key Note Segment		8 ft	258			
54816	315.8 to 316.8 feet	**Vertical Change**	.37"	8 ft	8	REF		
54835	337.8 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,896**
54836	347.5 to 357.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	80	SF	$120	**$9,600**
54837	357.5 to 362.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	37	SF	$120	**$4,416**
54838	365.5 to 372.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	58	SF	$120	**$7,008**
54839	374.9 to 379.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	33	SF	$120	**$3,936**
54840	379.6 to 385.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	47	SF	$120	**$5,664**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091458	COUNTRY CLUB DR	W CLEVELAND AVE	W SHERWOOD WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54841	388.0 to 431.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	349	SF	$120	**$41,856**
54842	436.0 to 445.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	79	SF	$120	**$9,504**
54843	450.0 to 454.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,128**
54844	457.5 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,208**
54845	463.9 to 473.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	80	SF	$120	**$9,600**
54851	473.9 to 506.1 feet	Key Note Segment		8 ft	258			
54846	507.0 to 519.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	97	SF	$120	**$11,616**
54847	524.9 to 538.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	109	SF	$120	**$13,056**
54848	550.9 to 577.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	209	SF	$120	**$25,056**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **W CLEVELAND AVE** **$374,784.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011044	COUNTRY CLUB DR	W SHERWOOD WAY	1305 COUNTRY CLUB DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115781	0.3 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	108	SF	$120	**$12,960**
115782	18.3 to 44.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	207	SF	$120	**$24,864**
115783	47.2 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	274	SF	$120	**$32,928**
115778	61.4 to 62.4 feet	**Vertical Change**	.3"	8 ft	8	REF		
115784	82.1 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	135	SF	$120	**$16,224**
115785	100.8 to 114.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	108	SF	$120	**$12,960**
115779	114.9 to 115.9 feet	**Vertical Change**	.27"	8 ft	8	LF	$75	**$600**
115786	117.0 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,608**
115787	124.1 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,632**
115788	128.0 to 132.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,608**
115780	131.9 to 132.9 feet	**Vertical Change**	.39"	8 ft	8	REF		
115789	133.3 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	125	SF	$120	**$14,976**

TOTAL COST FOR: E *side of* **COUNTRY CLUB DR** *Starting at:* **W SHERWOOD WAY** **$126,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091443	COUNTRY CLUB DR	W SHERWOOD WAY	SHARON BVD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54751	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,168**
54752	3.4 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	55	SF	$120	**$6,624**
54773	11.1 to 42.5 feet	Key Note Segment		8 ft	251			
54749	11.9 to 12.9 feet	**Vertical Change**	-.47"	8 ft	8	REF		
54753	42.5 to 52.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	8 ft	82	SF	$40	**$3,296**
54754	71.4 to 101.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	242	SF	$120	**$28,992**
54755	103.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	112	SF	$120	**$13,440**
54774	117.3 to 151.9 feet	Key Note Segment		8 ft	277			
54756	151.9 to 153.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	15	SF	$40	**$608**
54757	157.1 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	143	SF	$120	**$17,184**
54758	177.4 to 181.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	35	SF	$120	**$4,224**
54759	181.8 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	40	SF	$120	**$4,800**
54760	191.3 to 202.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	90	SF	$120	**$10,752**
54761	202.5 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	57	SF	$120	**$6,816**
54762	209.6 to 222.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	106	SF	$120	**$12,768**
54763	222.9 to 224.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
54775	224.1 to 250.1 feet	Key Note Segment		8 ft	208			
54764	250.1 to 259.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	74	SF	$40	**$2,976**
54765	266.6 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,432**
54766	276.3 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,400**
54767	290.6 to 292.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,728**
54768	304.3 to 307.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	28	SF	$120	**$3,360**
54769	312.2 to 326.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	111	SF	$120	**$13,344**
54776	326.1 to 359.6 feet	Key Note Segment		8 ft	268			
54750	334.4 to 335.4 feet	**Vertical Change**	.49"	8 ft	8	REF		
54770	360.3 to 398.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	306	SF	$40	**$12,224**
54771	398.5 to 409.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	89	SF	$120	**$10,656**
54772	410.0 to 412.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,112**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091443	COUNTRY CLUB DR	W SHERWOOD WAY	SHARON BVD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: W		*side of* **COUNTRY CLUB DR**	*Starting at:* **W SHERWOOD WAY**					**$169,056.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151517	CREEK DR	CEDAR CREEK LN	SULTANA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83853	3.3 to 13.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
83846	7.3 to 8.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
83854	19.3 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83871	21.4 to 43.0 feet	Key Note Segment		5 ft	108			
83847	22.9 to 23.9 feet	**Vertical Change**	.86"	5 ft	5	REF		
83855	43.8 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83848	46.1 to 47.1 feet	**Vertical Change**	-.58"	5 ft	5	SF	$75	**$375**
83872	48.5 to 70.3 feet	Key Note Segment		5 ft	109			
83856	72.2 to 78.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
83857	78.3 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83849	86.6 to 87.6 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
83858	88.4 to 98.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
83859	98.7 to 99.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83850	101.9 to 102.9 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
83873	102.6 to 124.6 feet	Key Note Segment		5 ft	110			
83860	125.8 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83861	128.6 to 134.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
83862	134.5 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
83863	139.6 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
83864	144.8 to 146.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,140**
83865	153.6 to 155.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
83866	156.3 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
83867	166.8 to 172.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
83868	175.2 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
83874	178.2 to 201.0 feet	Key Note Segment		5 ft	114			
83869	203.2 to 206.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
83875	207.0 to 233.7 feet	Key Note Segment		5 ft	134			
83870	234.7 to 251.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151517	CREEK DR	CEDAR CREEK LN	SULTANA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83851	240.9 to 241.9 feet	Vertical Change	.92"	5 ft	5	REF		
83852	251.0 to 252.0 feet	Vertical Change	.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **CREEK DR** *Starting at:* **CEDAR CREEK LN** **$49,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151403	CREEK DR	REN WAY	WINTER WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82927	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
82928	4.5 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
82929	11.8 to 13.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
82930	16.2 to 19.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
82942	20.5 to 40.6 feet	Key Note Segment		5 ft	101			
82931	40.8 to 44.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	18	SF	$40	**$720**
82943	46.8 to 66.8 feet	Key Note Segment		5 ft	100			
82924	47.0 to 48.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
82925	66.0 to 67.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
82932	67.8 to 77.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
82933	80.3 to 93.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
82934	95.7 to 97.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
82944	97.1 to 117.8 feet	Key Note Segment		5 ft	104			
82935	118.3 to 128.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	51	SF	$40	**$2,040**
82936	128.8 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
82937	135.2 to 154.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
82938	155.6 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
82939	160.8 to 166.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
82940	166.8 to 168.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
82945	169.3 to 189.3 feet	Key Note Segment		5 ft	100			
82926	189.3 to 190.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
82941	190.4 to 191.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **CREEK DR** *Starting at:* **REN WAY** **$46,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151510	CREEK DR	SULTANA DR	CEDAR CREEK LN	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83764	0.2 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
83739	1.2 to 2.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
83740	4.8 to 5.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
83741	6.5 to 7.5 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
83765	10.7 to 12.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
83743	12.3 to 13.3 feet	**Vertical Change**	1.43"	5 ft	5	SF	$75	**$375**
83744	14.4 to 15.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
83745	16.7 to 17.7 feet	**Vertical Change**	2.76"	5 ft	5	SF	$75	**$375**
83746	19.0 to 24.5 feet	**Vertical Change**	3.45"	5 ft	28	REF		
83766	19.5 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
83767	23.7 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
83747	28.7 to 29.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
83768	32.4 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
83769	39.8 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
83770	47.3 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
83771	55.0 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83772	58.3 to 60.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
83773	61.0 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
83748	63.4 to 64.4 feet	**Vertical Change**	2.42"	5 ft	5	REF		
83774	80.1 to 101.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
83749	81.8 to 85.0 feet	**Vertical Change**	.47"	5 ft	16	REF		
83750	95.0 to 96.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
83751	99.0 to 102.7 feet	**Vertical Change**	.28"	5 ft	19	REF		
83775	101.9 to 107.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
83752	104.4 to 105.4 feet	**Vertical Change**	.62"	5 ft	5	REF		
83753	106.1 to 107.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
83754	108.1 to 109.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
83776	110.8 to 111.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151510	CREEK DR	SULTANA DR	CEDAR CREEK LN	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83755	111.5 to 112.5 feet	Vertical Change	-.57"	5 ft	5	REF		
83787	112.1 to 133.8 feet	Key Note Segment		5 ft	109			
83756	116.5 to 117.5 feet	Vertical Change	.43"	5 ft	5	REF		
83757	123.6 to 124.6 feet	Vertical Change	-.42"	5 ft	5	REF		
83777	133.8 to 136.8 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	15	SF	$40	**$600**
83788	139.5 to 161.6 feet	Key Note Segment		5 ft	111			
83758	140.1 to 141.1 feet	Vertical Change	.27"	5 ft	5	REF		
83759	161.1 to 162.1 feet	Vertical Change	-.34"	5 ft	5	REF		
83778	163.8 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
83779	167.7 to 169.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
83780	169.9 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
83781	183.5 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
83782	190.8 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
83760	193.9 to 194.9 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
83761	204.3 to 205.3 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
83762	207.6 to 208.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
83789	216.8 to 239.7 feet	Key Note Segment		5 ft	115			
83763	231.6 to 232.6 feet	Vertical Change	.35"	5 ft	5	REF		
83783	240.3 to 244.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	**$760**
83790	245.4 to 266.1 feet	Key Note Segment		5 ft	104			
83784	267.7 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
83785	277.4 to 283.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
83786	283.8 to 289.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: E *side of* **CREEK DR** *Starting at:* **SULTANA DR** **$68,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151410	CREEK DR	WINTER WAY	REN WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83021	0.0 to 1.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	9	SF	$120	**$1,080**
83041	0.0 to 1.3 feet		5.0-6.0%	5 ft	7			
83022	5.8 to 17.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	58	SF	$120	**$6,900**
83014	11.1 to 12.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
83015	18.7 to 19.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
83023	19.3 to 22.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
83024	22.3 to 25.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
83025	25.6 to 26.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
83026	28.7 to 30.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
83027	31.3 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
83016	46.7 to 47.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
83028	59.1 to 64.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
83017	59.4 to 60.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
83029	67.0 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
83030	71.8 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
83031	75.6 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
83032	95.2 to 96.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
83033	98.9 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
83034	104.0 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
83035	117.2 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
83036	122.3 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
83037	127.2 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
83018	130.4 to 131.4 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
83038	132.6 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
83019	135.2 to 136.2 feet	**Vertical Change**	-.38"	5 ft	5	REF		
83020	137.8 to 138.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
83039	138.8 to 141.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
83040	145.1 to 146.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151410	CREEK DR	WINTER WAY	REN WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83042	145.8 to 148.3 feet		5.0-6.0%	5 ft	13			
83043	145.8 to 148.3 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **CREEK DR** *Starting at:* **WINTER WAY** **$62,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111144	CRIMSON WY	SCARLET DR	STOREY RD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132910	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132911	5.3 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
132912	16.3 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,260**
132909	38.7 to 39.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
132913	45.7 to 53.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
132914	56.3 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: W *side of* **CRIMSON WY** *Starting at:* **SCARLET DR** **$32,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111148	CRIMSON WY	STOREY RD	SCARLET DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132941	0.0 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
132940	3.7 to 4.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
132942	21.1 to 37.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
132943	37.0 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
132944	65.6 to 66.9 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **CRIMSON WY** *Starting at:* **STOREY RD** **$39,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101425	CROSS ST	1012 CROSS ST	1012 CROSS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131905	4.2 to 5.2 feet	**Vertical Change**	.35"	4 ft	4	REF		
131908	5.1 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
131909	10.8 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
131906	19.8 to 20.8 feet	**Vertical Change**	.3"	4 ft	4	REF		
131910	21.9 to 28.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	28	SF	$120	**$3,312**
131911	29.7 to 38.8 feet	Key Note Segment		4 ft	36			
131907	30.3 to 31.3 feet	**Vertical Change**	.33"	4 ft	4	REF		

TOTAL COST FOR: SE *side of* **CROSS ST** *Starting at:* **1012 CROSS ST** **$8,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101316	CROSS ST	1015 CROSS ST	1015 CROSS ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131683	1.5 to 2.5 feet	Continuous Width	36"	5 ft	5	SF	$120	**$600**
131678	15.1 to 16.1 feet	Vertical Change	-.28"	5 ft	5	REF		
131682	17.3 to 32.3 feet	Key Note Segment		5 ft	75			
131679	19.8 to 20.8 feet	Vertical Change	1.26"	5 ft	5	REF		
131681	32.3 to 33.4 feet	Cross Slope (Driveway)	10.0-11.0%	5 ft	6	SF	$40	**$220**
131680	33.3 to 34.3 feet	Vertical Change	.39"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **1015 CROSS ST** **$820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101314	CROSS ST	1019 CROSS ST	1019 CROSS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131675	0.0 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
131671	11.7 to 12.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
131677	15.2 to 34.4 feet	Key Note Segment		5 ft	96			
131672	25.9 to 26.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
131673	35.4 to 36.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
131676	37.3 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
131674	38.4 to 39.4 feet	**Vertical Change**	.48"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **1019 CROSS ST** **$11,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101427	CROSS ST	1020 CROSS ST	1100 CROSS ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131924	0.3 to 10.5 feet	Key Note Segment		5 ft	51			
131912	2.4 to 3.4 feet	Vertical Change	.55"	5 ft	5	REF		
131917	12.8 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
131918	18.5 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
131919	22.3 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
131920	29.7 to 67.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	189	SF	$120	**$22,740**
131927	34.5 to 35.5 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
131913	41.1 to 42.1 feet	Vertical Change	1.46"	5 ft	5	REF		
131914	65.1 to 66.1 feet	Vertical Change	.36"	5 ft	5	REF		
131925	68.0 to 83.5 feet	Key Note Segment		5 ft	78			
131915	84.1 to 85.1 feet	Vertical Change	-.26"	5 ft	5	REF		
131921	86.8 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
131922	102.4 to 107.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
131923	108.7 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
131916	119.2 to 120.2 feet	Vertical Change	.99"	5 ft	5	REF		
131926	125.7 to 139.9 feet	Key Note Segment		5 ft	71			

TOTAL COST FOR: SE *side of* **CROSS ST** *Starting at:* **1020 CROSS ST** **$49,839.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101429	CROSS ST	1100 CROSS ST	1112 CROSS ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131935	0.3 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
131948	2.8 to 15.1 feet	Key Note Segment		5 ft	62			
131928	15.3 to 16.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
131936	16.6 to 17.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
131937	18.7 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
131929	28.8 to 29.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
131938	29.6 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
131939	32.3 to 33.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
131940	37.6 to 43.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
131949	44.6 to 70.1 feet	Key Note Segment		5 ft	127			
131930	71.7 to 72.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
131931	84.2 to 85.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
131941	88.0 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131942	111.4 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
131950	114.5 to 125.3 feet	Key Note Segment		5 ft	54			
131943	126.9 to 128.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
131951	128.6 to 142.1 feet	Key Note Segment		5 ft	68			
131944	143.2 to 144.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
131945	144.2 to 147.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
131946	150.8 to 166.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,540**
131932	161.8 to 162.8 feet	**Vertical Change**	1.21"	5 ft	5	REF		
131933	164.7 to 165.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
131934	167.8 to 168.8 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
131947	170.2 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: SE *side of* **CROSS ST** *Starting at:* **1100 CROSS ST** **$28,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101312	CROSS ST	1101 CROSS ST	1101 CROSS ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131669	4.0 to 5.0 feet	**Protruding Object**	48"	4 ft	4	JOB	$99	**$99**
131661	4.6 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
131662	8.6 to 9.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$576**
131663	10.1 to 11.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	5	SF	$120	**$576**
131664	11.3 to 20.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	38	SF	$120	**$4,608**
131665	21.5 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
131666	22.8 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
131667	30.5 to 34.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,728**
131670	40.2 to 41.2 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
131668	41.6 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **1101 CROSS ST** **$14,835.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101354	CROSS ST	828 CROSS ST	828 CROSS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131802	0.0 to 3.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
131804	5.3 to 26.9 feet	Key Note Segment		5 ft	108			
131803	29.3 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
131801	30.2 to 31.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **CROSS ST** *Starting at:* **828 CROSS ST** **$6,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101356	CROSS ST	830 CROSS ST	830 CROSS ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131807	1.4 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
131805	2.4 to 3.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
131809	5.8 to 23.9 feet	Key Note Segment		5 ft	91			
131806	15.6 to 16.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
131808	26.8 to 30.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: SE *side of* **CROSS ST** *Starting at:* **830 CROSS ST** **$3,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101326	CROSS ST	921 CROSS ST	921 CROSS ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131707	1.1 to 17.8 feet	Key Note Segment		4 ft	67			
131705	18.0 to 25.8 feet	Cross Slope (Driveway)	12.0-13.0%	4 ft	31	SF	$40	**$1,248**
131701	19.5 to 20.5 feet	Vertical Change	-.37"	4 ft	4	REF		
131702	22.9 to 23.9 feet	Vertical Change	.42"	4 ft	4	REF		
131706	25.8 to 27.0 feet	Cross Slope (PAR)	10.0-11.0%	4 ft	5	SF	$120	**$576**
131708	27.1 to 28.2 feet		5.0-6.0%	4 ft	4			
131703	27.5 to 28.5 feet	Vertical Change	-.99"	4 ft	4	SF	$75	**$300**
131704	29.7 to 30.7 feet	Vertical Change	.48"	4 ft	4	LF	$75	**$300**
131709	38.7 to 39.7 feet		5.0-6.0%	4 ft	4			

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **921 CROSS ST** **$2,424.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101325	CROSS ST	933 CROSS ST	929 CROSS ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131696	0.7 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
131697	8.8 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
131690	9.9 to 10.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
131698	14.1 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
131691	22.9 to 23.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
131699	24.3 to 38.8 feet	Key Note Segment		5 ft	72			
131692	25.6 to 26.6 feet	**Vertical Change**	-.57"	5 ft	5	REF		
131693	27.7 to 28.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
131694	35.7 to 36.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
131695	40.6 to 41.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
131700	40.8 to 52.0 feet	Key Note Segment		5 ft	56			

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **933 CROSS ST** **$13,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101311	CROSS ST	FIG AVE	1109 CROSS ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131650	0.1 to 49.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	197	SF	$120	**$23,664**
131644	2.9 to 3.9 feet	**Vertical Change**	2.76"	4 ft	4	REF		
131657	49.4 to 62.8 feet	Key Note Segment		4 ft	54			
131645	50.2 to 51.2 feet	**Vertical Change**	.72"	4 ft	4	REF		
131646	62.5 to 63.5 feet	**Vertical Change**	.36"	4 ft	4	REF		
131651	64.3 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
131652	67.0 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
131653	72.8 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	59	SF	$120	**$7,056**
131647	76.4 to 77.4 feet	**Vertical Change**	.51"	4 ft	4	REF		
131654	87.5 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
131658	89.3 to 101.3 feet	Key Note Segment		4 ft	48			
131648	94.6 to 95.6 feet	**Vertical Change**	1.14"	4 ft	4	REF		
131649	96.9 to 97.9 feet	**Vertical Change**	.59"	4 ft	4	REF		
131659	104.3 to 119.7 feet	Key Note Segment		4 ft	62			
131655	121.7 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
131656	127.0 to 167.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	161	SF	$120	**$19,296**
131660	167.2 to 188.8 feet	Key Note Segment		4 ft	86			

TOTAL COST FOR: NW *side of* **CROSS ST** *Starting at:* **FIG AVE** **$56,976.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181720	CROWN TERRACE	BENT OAK TR	STADIUM RD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102507	1.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
102508	38.7 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
102509	68.4 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**

TOTAL COST FOR: S *side of* **CROWN TERRACE** *Starting at:* **BENT OAK TR** **$26,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181723	CROWN TERRACE	STADIUM RD	BENT OAK TR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102512	0.2 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
102513	4.7 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
102514	11.9 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102515	18.9 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
102516	26.2 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
102517	44.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
102518	54.7 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
102510	60.6 to 61.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
102511	69.7 to 70.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
102519	72.8 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: N *side of* **CROWN TERRACE** *Starting at:* **STADIUM RD** **$26,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201211	CRYSTAL WAY	BO TREE LN	GARY LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76450	0.2 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,660**
76451	21.3 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
76452	42.0 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
76453	49.7 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,960**
76460	66.3 to 86.9 feet	Key Note Segment		5 ft	103			
76445	70.0 to 71.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
76454	87.5 to 92.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
76455	94.3 to 107.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
76446	98.7 to 99.7 feet	**Vertical Change**	-.43"	5 ft	5	REF		
76456	108.3 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
76447	115.5 to 116.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
76461	127.0 to 147.1 feet	Key Note Segment		5 ft	101			
76448	137.4 to 138.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
76449	146.9 to 147.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
76457	147.3 to 148.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
76462	152.9 to 172.8 feet	Key Note Segment		5 ft	100			
76458	176.5 to 189.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
76459	190.5 to 193.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: W *side of* **CRYSTAL WAY** *Starting at:* **BO TREE LN** **$67,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201152	CRYSTAL WAY	GARY LN	BO TREE LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76261	1.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
76262	7.4 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
76263	17.3 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
76264	21.5 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
76265	22.9 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
76277	25.6 to 45.3 feet	Key Note Segment		5 ft	99			
76252	28.8 to 29.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
76253	42.6 to 43.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
76266	46.0 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
76278	51.5 to 71.4 feet	Key Note Segment		5 ft	100			
76254	61.6 to 62.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
76255	68.5 to 69.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
76267	72.8 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
76268	78.3 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
76269	95.2 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
76256	99.8 to 100.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
76270	104.1 to 111.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
76271	113.7 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
76257	114.9 to 115.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
76272	118.3 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
76279	120.4 to 140.1 feet	Key Note Segment		5 ft	99			
76258	137.2 to 138.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
76273	141.0 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
76280	146.8 to 165.2 feet	Key Note Segment		5 ft	92			
76259	149.8 to 150.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
76274	166.2 to 167.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
76275	173.4 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
76260	174.1 to 175.1 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201152	CRYSTAL WAY	GARY LN	BO TREE LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76276	192.1 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: E *side of* **CRYSTAL WAY** *Starting at:* **GARY LN** **$43,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201117	CRYSTAL WAY	GARY LN	STRAUSS CT	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75951	0.8 to 2.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$918**
75952	2.9 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,916**
75953	8.5 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
75954	12.4 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,886**
75942	17.6 to 18.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
75976	24.8 to 46.9 feet	Key Note Segment		5 ft	99			
75955	47.9 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
75977	50.9 to 72.8 feet	Key Note Segment		5 ft	99			
75943	71.5 to 72.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
75956	74.0 to 97.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
75957	97.0 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,750**
75958	113.4 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,344**
75978	127.5 to 147.9 feet	Key Note Segment		5 ft	92			
75944	144.8 to 145.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
75945	146.7 to 147.7 feet	**Vertical Change**	.93"	5 ft	5	REF		
75959	149.1 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,214**
75979	153.2 to 173.8 feet	Key Note Segment		5 ft	93			
75960	176.5 to 178.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,242**
75961	182.7 to 186.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,106**
75962	187.2 to 203.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	75	SF	$120	**$8,964**
75963	204.3 to 207.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,512**
75964	208.8 to 214.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
75965	215.1 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
75966	218.8 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
75980	228.8 to 250.0 feet	Key Note Segment		5 ft	95			
75946	229.9 to 230.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
75967	251.5 to 253.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,188**
75981	255.1 to 276.4 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201117	CRYSTAL WAY	GARY LN	STRAUSS CT	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75947	277.3 to 278.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$338
75968	285.0 to 288.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,728
75948	288.8 to 289.8 feet	Vertical Change	.28"	5 ft	5	LF	$75	$338
75969	290.6 to 291.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$540
75970	292.5 to 299.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,726
75949	294.2 to 295.2 feet	Vertical Change	.34"	5 ft	5	REF		
75971	300.4 to 308.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,590
75972	311.2 to 321.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	$5,724
75950	311.9 to 312.9 feet	Vertical Change	.37"	5 ft	5	REF		
75973	324.5 to 336.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	$6,480
75974	341.3 to 367.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	$14,094
75975	369.9 to 383.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	$7,452

TOTAL COST FOR: W *side of* **CRYSTAL WAY** *Starting at:* **GARY LN** **$111,969.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201114	CRYSTAL WAY	STRAUSS CT	GARY LN	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75913	0.2 to 4.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,268**
75914	7.9 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,126**
75905	12.3 to 13.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
75915	25.3 to 30.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,970**
75916	33.7 to 35.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$972**
75917	36.0 to 47.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,264**
75906	36.9 to 37.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
75918	49.5 to 51.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
75919	51.4 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,346**
75920	64.5 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,558**
75921	91.5 to 102.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,156**
75935	103.1 to 124.7 feet	Key Note Segment		5 ft	97			
75907	124.1 to 125.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
75922	125.3 to 126.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$216**
75936	129.9 to 150.4 feet	Key Note Segment		5 ft	92			
75908	130.8 to 131.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
75909	140.4 to 141.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
75923	151.5 to 169.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,774**
75924	170.1 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,044**
75925	190.9 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,564**
75926	197.5 to 201.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
75927	203.6 to 205.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
75937	205.2 to 226.3 feet	Key Note Segment		5 ft	95			
75928	227.8 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
75938	230.8 to 251.9 feet	Key Note Segment		5 ft	95			
75929	253.8 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
75930	259.8 to 277.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,504**
75911	275.8 to 276.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201114	CRYSTAL WAY	STRAUSS CT	GARY LN	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75931	280.4 to 291.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,156**
75932	291.8 to 308.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,748**
75939	308.0 to 328.9 feet	Key Note Segment		5 ft	94			
75933	330.5 to 331.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
75940	333.5 to 354.7 feet	Key Note Segment		5 ft	95			
75934	356.1 to 384.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,390**
75912	367.7 to 368.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
75941	383.1 to 384.2 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **CRYSTAL WAY** *Starting at:* **STRAUSS CT** **$113,292.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121406	CYPRESS CT	DRIFTWOOD DR	DRIFTWOOD DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96155	0.0 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
96156	11.1 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
96157	14.9 to 23.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
96184	24.3 to 43.7 feet	Key Note Segment		5 ft	97			
96138	34.3 to 35.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
96158	45.2 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
96159	48.7 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
96160	53.2 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,060**
96185	78.3 to 98.9 feet	Key Note Segment		5 ft	103			
96161	100.9 to 105.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
96162	105.0 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
96163	110.3 to 115.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
96164	120.3 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
96186	126.7 to 146.8 feet	Key Note Segment		5 ft	101			
96139	137.0 to 138.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
96165	154.5 to 159.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
96166	159.3 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
96187	162.9 to 186.3 feet	Key Note Segment		5 ft	117			
96140	176.2 to 177.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
96141	185.9 to 186.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
96167	187.3 to 190.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
96168	199.0 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
96188	211.2 to 241.3 feet	Key Note Segment		5 ft	151			
96142	221.6 to 222.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
96143	244.5 to 245.5 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
96189	245.2 to 265.2 feet	Key Note Segment		5 ft	100			
96144	254.0 to 255.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
96169	265.6 to 267.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121406	CYPRESS CT	DRIFTWOOD DR	DRIFTWOOD DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96145	270.5 to 271.5 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
96170	272.2 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
96190	277.8 to 308.3 feet	Key Note Segment		5 ft	153			
96146	298.1 to 299.1 feet	Vertical Change	.28"	5 ft	5	REF		
96171	309.1 to 314.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
96147	310.6 to 311.6 feet	Vertical Change	-.58"	5 ft	5	REF		
96172	316.8 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
96173	321.3 to 325.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,460
96148	323.9 to 324.9 feet	Vertical Change	-.32"	5 ft	5	REF		
96174	328.2 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
96191	337.0 to 360.6 feet	Key Note Segment		5 ft	118			
96149	347.9 to 348.9 feet	Vertical Change	.53"	5 ft	5	REF		
96150	360.7 to 361.7 feet	Vertical Change	.39"	5 ft	5	REF		
96175	361.3 to 366.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	24	SF	$40	$940
96192	367.8 to 387.5 feet	Key Note Segment		5 ft	99			
96151	378.2 to 379.2 feet	Vertical Change	-.28"	5 ft	5	REF		
96152	385.9 to 386.9 feet	Vertical Change	2.82"	5 ft	5	REF		
96176	388.8 to 391.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
96177	396.3 to 398.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
96178	400.5 to 420.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	$12,180
96179	422.0 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
96193	423.9 to 443.6 feet	Key Note Segment		5 ft	99			
96180	448.5 to 476.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	$16,500
96153	476.7 to 477.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
96194	477.6 to 498.0 feet	Key Note Segment		5 ft	102			
96154	488.3 to 489.3 feet	Vertical Change	.29"	5 ft	5	REF		
96181	498.5 to 504.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	28	SF	$40	$1,120
96182	506.0 to 515.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,580

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121406	CYPRESS CT	DRIFTWOOD DR	DRIFTWOOD DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96183	518.9 to 522.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: E/N/W *side of* **CYPRESS CT** *Starting at:* **DRIFTWOOD DR** **$113,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211704	CYPRESS ST	107 CYPRESS ST	OLIVE AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106830	0.1 to 1.1 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
106835	2.3 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
106836	13.7 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
106837	22.5 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,420
106838	35.5 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,980
106839	43.8 to 47.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
106850	49.0 to 70.2 feet	Key Note Segment		5 ft	106			
106831	50.1 to 51.1 feet	Vertical Change	-.26"	5 ft	5	REF		
106840	71.4 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,140
106841	75.8 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
106842	82.2 to 85.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
106851	86.1 to 104.6 feet	Key Note Segment		5 ft	93			
106832	97.1 to 98.1 feet	Vertical Change	.48"	5 ft	5	REF		
106843	104.8 to 109.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	22	SF	$40	$880
106852	109.2 to 125.7 feet	Key Note Segment		5 ft	83			
106833	127.0 to 128.0 feet	Vertical Change	.34"	5 ft	5	REF		
106844	127.3 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
106845	146.3 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
106846	167.8 to 178.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
106847	187.3 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
106834	205.4 to 206.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
106853	205.8 to 206.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
106848	206.9 to 207.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
106849	208.5 to 209.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600

TOTAL COST FOR: E *side of* **CYPRESS ST** *Starting at:* **107 CYPRESS ST** **$48,889.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211657	CYPRESS ST	205 CYPRESS ST	OAK ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106818	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	23	SF	$120	**$2,700**
106827	2.9 to 11.3 feet	Key Note Segment		9 ft	76			
106819	11.3 to 15.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	9 ft	41	SF	$40	**$1,656**
106820	17.0 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	51	SF	$120	**$6,156**
106814	19.0 to 20.0 feet	**Vertical Change**	.39"	9 ft	9	REF		
106821	26.7 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	42	SF	$120	**$5,076**
106822	34.3 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	60	SF	$120	**$7,236**
106815	40.5 to 41.5 feet	**Vertical Change**	-.27"	9 ft	9	REF		
106823	41.3 to 44.7 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	31	SF	$120	**$3,672**
106828	45.2 to 69.8 feet	Key Note Segment		9 ft	221			
106824	69.8 to 72.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	28	SF	$40	**$1,116**
106825	73.8 to 87.0 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	119	SF	$120	**$14,256**
106816	74.0 to 75.0 feet	**Vertical Change**	.35"	9 ft	9	REF		
106829	89.3 to 103.7 feet	Key Note Segment		9 ft	130			
106817	90.3 to 91.3 feet	**Vertical Change**	.28"	9 ft	9	REF		
106826	105.4 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	199	SF	$120	**$23,868**

TOTAL COST FOR: E *side of* **CYPRESS ST** *Starting at:* **205 CYPRESS ST** **$65,736.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211654	CYPRESS ST	225 CYPRESS ST	213 CYPRESS ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106808	0.0 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	80	SF	$120	**$9,612**
106813	1.1 to 2.1 feet	**Continuous Width**	36"	9 ft	9	SF	$120	**$1,080**
106804	4.2 to 5.2 feet	**Vertical Change**	1.82"	9 ft	9	REF		
106812	8.9 to 38.5 feet	Key Note Segment		9 ft	266			
106805	9.7 to 10.7 feet	**Vertical Change**	-.27"	9 ft	9	REF		
106809	39.3 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	34	SF	$120	**$4,104**
106806	39.8 to 40.8 feet	**Vertical Change**	-.28"	9 ft	9	REF		
106810	43.8 to 45.0 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	11	SF	$120	**$1,296**
106807	46.2 to 47.2 feet	**Vertical Change**	2.17"	9 ft	9	SF	$75	**$675**
106811	47.7 to 57.4 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	87	SF	$120	**$10,476**

TOTAL COST FOR: E *side of* **CYPRESS ST** *Starting at:* **225 CYPRESS ST** **$27,243.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211534	CYPRESS ST	OAK ST	MAPLE ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106423	1.4 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
106401	10.3 to 11.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
106424	11.3 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
106402	14.5 to 15.5 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
106425	17.2 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
106403	24.9 to 25.9 feet	**Vertical Change**	.82"	5 ft	5	REF		
106426	24.9 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
106427	31.3 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106404	31.7 to 32.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
106428	40.2 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,660**
106405	46.6 to 47.6 feet	**Vertical Change**	.65"	5 ft	5	REF		
106429	63.4 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
106406	65.8 to 66.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
106407	75.1 to 76.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
106408	79.1 to 80.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
106430	82.4 to 85.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
106431	88.8 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
106409	93.6 to 94.6 feet	**Vertical Change**	.8"	5 ft	5	REF		
106432	115.1 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
106410	115.5 to 116.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
106433	126.3 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
106434	128.3 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
106411	131.6 to 132.6 feet	**Vertical Change**	1.41"	5 ft	5	REF		
106435	146.1 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
106443	157.6 to 174.6 feet	Key Note Segment		5 ft	85			
106412	175.8 to 176.8 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
106413	181.4 to 182.4 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
106414	203.9 to 204.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211534	CYPRESS ST	OAK ST	MAPLE ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106436	205.5 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106415	225.3 to 226.3 feet	**Vertical Change**	3.58"	5 ft	5	SF	$75	**$375**
106437	238.6 to 240.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
106416	239.3 to 240.3 feet	**Vertical Change**	1.69"	5 ft	5	REF		
106438	240.8 to 249.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
106417	256.3 to 257.3 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
106444	283.8 to 301.8 feet	Key Note Segment		5 ft	90			
106418	312.0 to 313.0 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
106439	321.8 to 325.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
106419	322.7 to 323.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
106440	328.4 to 331.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
106421	337.5 to 338.5 feet	**Vertical Change**	1.63"	5 ft	5	SF	$75	**$375**
106422	343.0 to 344.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
106441	351.8 to 355.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
106442	358.8 to 363.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: W *side of* **CYPRESS ST** *Starting at:* **OAK ST** **$64,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211504	CYPRESS ST	OLIVE AVE	OAK ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106287	3.6 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	23	SF	$120	**$2,808**
106288	6.2 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	221	SF	$120	**$26,460**
106277	11.3 to 12.3 feet	Vertical Change	-.31"	9 ft	9	REF		
106278	26.7 to 27.7 feet	Vertical Change	.28"	9 ft	9	REF		
106316	30.7 to 65.8 feet	Key Note Segment		9 ft	316			
106279	31.8 to 32.8 feet	Vertical Change	-.56"	9 ft	9	REF		
106289	65.8 to 67.3 feet	Cross Slope (Driveway)	2.0-3.0%	9 ft	14	SF	$40	**$540**
106290	69.5 to 70.8 feet	Cross Slope (PAR)	6.0-7.0%	9 ft	12	SF	$120	**$1,404**
106291	73.3 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	36	SF	$120	**$4,320**
106292	79.6 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	24	SF	$120	**$2,916**
106280	80.2 to 81.2 feet	Vertical Change	-.3"	9 ft	9	REF		
106293	84.4 to 86.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	15	SF	$120	**$1,836**
106281	86.0 to 87.0 feet	Vertical Change	.38"	9 ft	9	REF		
106294	87.0 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	125	SF	$120	**$15,012**
106282	94.9 to 95.9 feet	Vertical Change	.39"	9 ft	9	REF		
106295	103.5 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	12	SF	$120	**$1,404**
106296	107.6 to 137.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	266	SF	$120	**$31,860**
106297	140.1 to 152.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	113	SF	$120	**$13,608**
106298	154.9 to 165.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	98	SF	$120	**$11,772**
106299	170.8 to 176.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	50	SF	$120	**$5,940**
106300	179.3 to 181.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	23	SF	$120	**$2,700**
106301	184.0 to 189.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	53	SF	$120	**$6,372**
106302	193.8 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	18	SF	$120	**$2,160**
106303	198.4 to 200.2 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	16	SF	$120	**$1,944**
106304	201.8 to 206.9 feet	Cross Slope (PAR)	5.0-6.0%	9 ft	46	SF	$120	**$5,508**
106305	207.9 to 209.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,188**
106306	211.4 to 212.6 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	11	SF	$120	**$1,296**
106283	213.6 to 214.6 feet	Vertical Change	.3"	9 ft	9	LF	$75	**$675**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211504	CYPRESS ST	OLIVE AVE	OAK ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106307	214.9 to 217.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	26	SF	$120	**$3,132**
106317	217.8 to 252.4 feet	Key Note Segment		9 ft	311			
106284	253.5 to 254.5 feet	**Vertical Change**	-.26"	9 ft	9	REF		
106308	253.7 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,188**
106309	257.4 to 272.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	134	SF	$120	**$16,092**
106310	272.5 to 273.9 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	13	SF	$120	**$1,512**
106311	276.2 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	14	SF	$120	**$1,620**
106312	278.3 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	203	SF	$120	**$24,300**
106313	301.6 to 305.9 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	39	SF	$120	**$4,644**
106314	305.9 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	13	SF	$120	**$1,512**
106285	314.2 to 315.2 feet	**Vertical Change**	.31"	9 ft	9	LF	$75	**$675**
106315	315.5 to 322.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	64	SF	$120	**$7,668**
106286	321.7 to 322.7 feet	**Vertical Change**	.4"	9 ft	9	REF		

TOTAL COST FOR: W *side of* **CYPRESS ST** *Starting at:* **OLIVE AVE** **$204,066.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091305	DAVIS ST	1100 DAVIS ST	W CLEVELAND AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54102	0.0 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
54103	31.5 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
54101	41.6 to 42.6 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
54104	45.2 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
54105	55.3 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**

TOTAL COST FOR: W *side of* **DAVIS ST** *Starting at:* **1100 DAVIS ST** **$9,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091312	DAVIS ST	E CLEVELAND AVE	W SHERWOOD WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54123	0.0 to 17.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	70	SF	$120	**$8,448**
54106	7.4 to 8.4 feet	**Vertical Change**	.34"	4 ft	4	REF		
54124	19.8 to 26.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	26	SF	$120	**$3,168**
54162	27.8 to 42.2 feet	Key Note Segment		4 ft	58			
54125	42.2 to 48.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	4 ft	24	SF	$40	**$960**
54126	48.2 to 49.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
54127	49.3 to 61.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	49	SF	$120	**$5,856**
54163	63.0 to 76.5 feet	Key Note Segment		4 ft	54			
54128	78.1 to 87.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	39	SF	$120	**$4,704**
54129	90.0 to 119.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	116	SF	$120	**$13,968**
54107	103.3 to 104.3 feet	**Vertical Change**	.65"	4 ft	4	REF		
54130	121.7 to 134.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	51	SF	$120	**$6,096**
54164	134.4 to 147.9 feet	Key Note Segment		4 ft	54			
54131	149.6 to 158.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	35	SF	$120	**$4,224**
54132	158.4 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,552**
54108	163.8 to 164.8 feet	**Vertical Change**	-.3"	4 ft	4	REF		
54165	166.4 to 179.7 feet	Key Note Segment		4 ft	53			
54133	182.6 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
54109	202.1 to 203.1 feet	**Vertical Change**	.41"	4 ft	4	LF	$75	**$300**
54110	205.2 to 206.2 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
54134	209.8 to 216.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
54111	210.7 to 211.7 feet	**Vertical Change**	-.27"	4 ft	4	REF		
54112	232.2 to 233.2 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
54166	236.3 to 249.3 feet	Key Note Segment		4 ft	52			
54113	236.6 to 237.6 feet	**Vertical Change**	.27"	4 ft	4	REF		
54114	243.3 to 244.3 feet	**Vertical Change**	.37"	4 ft	4	REF		
54135	249.3 to 254.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	20	SF	$40	**$800**
54167	268.8 to 283.6 feet	Key Note Segment		4 ft	59			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091312	DAVIS ST	E CLEVELAND AVE	W SHERWOOD WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54115	279.8 to 280.8 feet	Vertical Change	.33"	4 ft	4	REF		
54136	283.6 to 294.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	45	SF	$40	$1,792
54116	299.2 to 300.2 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
54137	303.0 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,456
54117	318.0 to 319.0 feet	Vertical Change	.26"	4 ft	4	LF	$75	$300
54138	330.9 to 340.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	$4,464
54168	341.8 to 355.5 feet	Key Note Segment		4 ft	55			
54139	356.4 to 361.5 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	20	SF	$40	$816
54140	362.8 to 373.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	44	SF	$120	$5,232
54169	375.7 to 389.8 feet	Key Note Segment		4 ft	56			
54141	389.8 to 393.3 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	14	SF	$40	$560
54142	395.7 to 398.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	$1,248
54143	399.4 to 406.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	$3,552
54118	412.5 to 413.5 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
54119	422.7 to 423.7 feet	Vertical Change	.48"	4 ft	4	LF	$75	$300
54177	434.8 to 437.8 feet		5.0-6.0%	4 ft	12			
54170	446.0 to 460.1 feet	Key Note Segment		4 ft	56			
54144	460.2 to 463.3 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	12	SF	$40	$496
54145	463.6 to 469.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,640
54146	470.0 to 480.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	$4,800
54147	480.6 to 486.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	$3,024
54120	481.7 to 482.7 feet	Vertical Change	.79"	4 ft	4	REF		
54148	494.5 to 497.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
54171	498.9 to 512.3 feet	Key Note Segment		4 ft	54			
54149	512.3 to 531.1 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	75	SF	$40	$3,008
54172	531.2 to 545.3 feet	Key Note Segment		4 ft	56			
54150	545.3 to 547.4 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	8	SF	$40	$336
54151	547.4 to 548.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$528

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091312	DAVIS ST	E CLEVELAND AVE	W SHERWOOD WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54152	551.4 to 556.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
54153	564.8 to 582.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	**$8,592**
54154	585.2 to 588.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
54155	600.9 to 603.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
54173	604.1 to 617.5 feet	Key Note Segment		4 ft	54			
54156	618.6 to 634.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,728**
54174	635.4 to 648.9 feet	Key Note Segment		4 ft	54			
54157	648.9 to 656.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	30	SF	$40	**$1,184**
54158	700.2 to 705.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
54175	706.2 to 720.4 feet	Key Note Segment		4 ft	57			
54159	720.4 to 742.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	88	SF	$40	**$3,504**
54176	742.3 to 756.3 feet	Key Note Segment		4 ft	56			
54160	767.5 to 771.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
54161	774.8 to 785.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
54121	779.2 to 780.2 feet	**Vertical Change**	.26"	4 ft	4	REF		
54122	783.9 to 784.9 feet	**Vertical Change**	.7"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **DAVIS ST** *Starting at:* **E CLEVELAND AVE** **$136,516.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031035	DAVIS ST	E CLEVELAND AVE	WILSON AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119542	4.6 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
119543	6.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119536	9.7 to 10.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
119544	12.6 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
119545	25.2 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
119546	35.2 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,660**
119547	46.7 to 82.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	179	SF	$120	**$21,480**
119537	62.8 to 63.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
119548	83.8 to 87.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
119549	90.3 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
119558	97.5 to 116.0 feet	Key Note Segment		5 ft	93			
119538	113.0 to 114.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
119539	116.5 to 117.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
119550	116.5 to 130.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	68	SF	$40	**$2,700**
119540	130.5 to 131.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
119551	130.8 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119552	137.8 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
119553	155.4 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
119554	164.2 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
119555	168.8 to 179.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
119559	185.3 to 186.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119556	187.6 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
119541	216.4 to 217.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
119557	218.3 to 220.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: W *side of* **DAVIS ST** *Starting at:* **E CLEVELAND AVE** **$85,494.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031140	DAVIS ST	E LINCOLN AVE	133 DAVIS ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119801	0.6 to 4.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
119799	2.0 to 3.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
119802	6.7 to 12.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	29	SF	$120	**$3,480**
119800	9.0 to 10.0 feet	**Vertical Change**	-.43"	5 ft	5	REF		
119803	13.0 to 14.1 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	**$660**
119804	16.2 to 18.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	11	SF	$120	**$1,320**
119805	20.5 to 22.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: E *side of* **DAVIS ST** *Starting at:* **E LINCOLN AVE** **$8,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091303	DAVIS ST	W SHERWOOD WAY	1104 DAVIS ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54030	12.9 to 13.9 feet	Vertical Change	.47"	4 ft	4	LF	$75	$300
54031	14.7 to 15.7 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
54089	27.6 to 41.5 feet	Key Note Segment		4 ft	56			
54032	28.3 to 29.3 feet	Vertical Change	.27"	4 ft	4	REF		
54053	41.5 to 50.8 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	37	SF	$40	$1,488
54054	51.3 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	$864
54055	55.2 to 56.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$720
54090	58.6 to 72.1 feet	Key Note Segment		4 ft	54			
54056	75.3 to 77.7 feet	Cross Slope (PAR)	9.0-10.0%	4 ft	10	SF	$120	$1,152
54033	79.4 to 80.4 feet	Vertical Change	.85"	4 ft	4	SF	$75	$300
54057	81.5 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
54058	105.0 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,400
54034	155.9 to 156.9 feet	Vertical Change	-.36"	4 ft	4	LF	$75	$300
54059	159.8 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	$2,736
54091	165.8 to 178.7 feet	Key Note Segment		4 ft	52			
54035	179.9 to 180.9 feet	Vertical Change	.54"	4 ft	4	SF	$75	$300
54060	223.7 to 236.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	$5,904
54092	236.3 to 250.3 feet	Key Note Segment		4 ft	56			
54061	250.3 to 256.4 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	24	SF	$40	$976
54062	257.4 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,504
54063	264.7 to 269.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	$2,448
54093	270.5 to 284.4 feet	Key Note Segment		4 ft	56			
54064	284.5 to 286.9 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	10	SF	$40	$384
54065	287.1 to 288.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$480
54066	291.8 to 293.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$720
54067	301.1 to 313.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	$6,096
54094	321.3 to 335.4 feet	Key Note Segment		4 ft	56			
54036	322.2 to 323.2 feet	Vertical Change	-.35"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091303	DAVIS ST	W SHERWOOD WAY	1104 DAVIS ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54068	361.8 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
54069	368.4 to 383.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
54037	375.7 to 376.7 feet	**Vertical Change**	.36"	4 ft	4	REF		
54038	389.4 to 390.4 feet	**Vertical Change**	1.98"	4 ft	4	SF	$75	**$300**
54095	392.8 to 406.8 feet	Key Note Segment		4 ft	56			
54039	402.9 to 403.9 feet	**Vertical Change**	2.21"	4 ft	4	REF		
54070	406.8 to 423.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	65	SF	$40	**$2,592**
54096	423.0 to 436.7 feet	Key Note Segment		4 ft	55			
54071	436.7 to 451.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	58	SF	$40	**$2,320**
54040	450.6 to 451.6 feet	**Vertical Change**	.39"	4 ft	4	REF		
54072	457.8 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
54073	463.2 to 473.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,800**
54041	472.0 to 473.0 feet	**Vertical Change**	.28"	4 ft	4	REF		
54074	473.8 to 474.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
54075	479.7 to 486.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
54097	498.2 to 512.5 feet	Key Note Segment		4 ft	57			
54076	512.8 to 514.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
54077	517.9 to 532.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
54098	534.8 to 548.5 feet	Key Note Segment		4 ft	55			
54042	539.2 to 540.2 feet	**Vertical Change**	1.32"	4 ft	4	REF		
54078	549.0 to 560.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,472**
54043	556.6 to 557.6 feet	**Vertical Change**	1.81"	4 ft	4	REF		
54044	560.0 to 561.0 feet	**Vertical Change**	1.42"	4 ft	4	REF		
54079	568.9 to 572.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
54080	576.8 to 597.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	84	SF	$120	**$10,128**
54045	584.5 to 585.5 feet	**Vertical Change**	-.28"	4 ft	4	REF		
54046	592.8 to 593.8 feet	**Vertical Change**	.48"	4 ft	4	REF		
54081	599.9 to 605.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091303	DAVIS ST	W SHERWOOD WAY	1104 DAVIS ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54099	605.3 to 619.5 feet	Key Note Segment		4 ft	57			
54082	621.2 to 624.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
54083	624.5 to 638.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,768**
54047	629.0 to 630.0 feet	**Vertical Change**	-.27"	4 ft	4	REF		
54100	639.0 to 653.3 feet	Key Note Segment		4 ft	57			
54084	653.8 to 655.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
54085	660.7 to 670.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
54048	663.9 to 664.9 feet	**Vertical Change**	.36"	4 ft	4	REF		
54049	670.8 to 671.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
54050	672.7 to 673.7 feet	**Vertical Change**	.51"	4 ft	4	SF	$75	**$300**
54086	681.0 to 695.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
54051	681.5 to 682.5 feet	**Vertical Change**	-.27"	4 ft	4	REF		
54052	687.0 to 690.8 feet	**Vertical Change**	.45"	4 ft	15	REF		
54087	695.8 to 705.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	38	SF	$120	**$4,512**
54088	705.9 to 709.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**

TOTAL COST FOR: W *side of* **DAVIS ST** *Starting at:* **W SHERWOOD WAY** **$110,516.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031032	DAVIS ST	WILSON AVE	E CLEVELAND AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119517	0.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
119518	19.9 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119519	32.5 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
119509	32.7 to 33.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
119520	38.3 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
119510	48.0 to 49.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
119521	49.7 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
119511	51.8 to 52.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
119532	60.0 to 61.0 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119512	61.4 to 62.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
119522	63.6 to 74.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
119523	75.5 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
119533	83.3 to 84.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119531	101.3 to 120.6 feet	Key Note Segment		5 ft	97			
119513	106.0 to 107.0 feet	**Vertical Change**	-.51"	5 ft	5	REF		
119515	120.7 to 121.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
119524	123.7 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
119534	141.4 to 142.4 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119525	147.3 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,260**
119516	152.9 to 153.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
119535	174.5 to 175.5 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
119526	189.2 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119527	197.8 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
119528	203.2 to 205.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
119529	206.8 to 208.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119530	210.3 to 219.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**

TOTAL COST FOR: E *side of* **DAVIS ST** *Starting at:* **WILSON AVE** **$87,612.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031025	DAVIS ST	WILSON AVE	200 DAVIS ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119480	11.2 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
119481	24.1 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
119477	43.8 to 44.8 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
119482	48.3 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119483	58.3 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
119484	69.6 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
119485	78.0 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119486	87.4 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
119478	95.5 to 96.5 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
119487	97.7 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
119489	104.1 to 121.4 feet	Key Note Segment		5 ft	87			
119479	104.5 to 105.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
119488	121.4 to 123.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**

TOTAL COST FOR: W *side of* **DAVIS ST** *Starting at:* **WILSON AVE** **$25,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151022	DE ANN COVE	PAMELA DR	PAMELA DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67842	0.4 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
67843	7.8 to 9.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
67844	12.6 to 13.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67845	13.6 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
67881	14.7 to 30.2 feet	Key Note Segment		5 ft	78			
67846	31.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67847	36.6 to 37.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$600**
67882	43.4 to 57.6 feet	Key Note Segment		5 ft	71			
67832	50.4 to 51.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
67848	58.5 to 62.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
67849	64.3 to 73.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,580**
67850	76.5 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
67851	82.5 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
67852	87.5 to 88.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
67883	91.1 to 106.2 feet	Key Note Segment		5 ft	76			
67853	111.4 to 112.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67854	114.8 to 115.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67855	116.4 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
67856	124.3 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
67857	142.4 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
67884	158.8 to 174.9 feet	Key Note Segment		5 ft	80			
67858	175.1 to 189.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	71	SF	$40	**$2,840**
67885	190.7 to 203.1 feet	Key Note Segment		5 ft	62			
67833	197.5 to 198.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
67859	212.1 to 216.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
67860	218.1 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67886	240.7 to 257.3 feet	Key Note Segment		5 ft	83			
67887	265.2 to 313.0 feet	Key Note Segment		5 ft	239			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151022	DE ANN COVE	PAMELA DR	PAMELA DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67836	271.1 to 272.1 feet	Vertical Change	-.31"	5 ft	5	REF		
67837	305.6 to 306.6 feet	Vertical Change	.27"	5 ft	5	REF		
67888	321.0 to 336.8 feet	Key Note Segment		5 ft	79			
67861	347.8 to 349.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
67862	349.6 to 351.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67838	367.9 to 368.9 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
67863	371.2 to 372.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67864	374.0 to 382.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
67865	382.4 to 383.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
67889	391.1 to 406.1 feet	Key Note Segment		5 ft	75			
67866	407.2 to 409.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
67867	410.0 to 421.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
67868	422.3 to 428.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
67839	422.9 to 423.9 feet	Vertical Change	.46"	5 ft	5	REF		
67869	429.7 to 434.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
67870	434.8 to 435.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67890	436.8 to 451.4 feet	Key Note Segment		5 ft	73			
67840	445.1 to 446.1 feet	Vertical Change	.29"	5 ft	5	REF		
67871	459.4 to 461.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$960**
67891	463.2 to 480.2 feet	Key Note Segment		5 ft	85			
67872	489.9 to 493.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
67873	495.4 to 497.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
67874	499.8 to 504.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
67892	512.3 to 536.2 feet	Key Note Segment		5 ft	120			
67841	518.8 to 519.8 feet	Vertical Change	.34"	5 ft	5	REF		
67875	542.3 to 543.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67876	545.0 to 550.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
67877	554.2 to 562.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151022	DE ANN COVE	PAMELA DR	PAMELA DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67878	562.3 to 567.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
67879	569.8 to 571.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
67880	571.0 to 573.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
67893	571.0 to 572.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E / W *side of* **DE ANN COVE** *Starting at:* **PAMELA DR** **$91,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150828	DEBORAH LN	GRANADA DR	KIMBERLEY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66585	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
66586	3.8 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
66587	8.3 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
66588	32.5 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
66566	36.8 to 37.8 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
66627	36.8 to 68.2 feet	Key Note Segment		5 ft	157			
66568	54.7 to 55.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
66569	69.4 to 70.4 feet	**Vertical Change**	-.63"	5 ft	5	SF	$75	**$375**
66589	94.3 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
66590	99.3 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
66591	112.5 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
66628	118.2 to 148.5 feet	Key Note Segment		5 ft	152			
66570	121.1 to 122.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
66592	150.4 to 151.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66593	156.2 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
66594	191.8 to 192.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
66595	203.1 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
66596	212.7 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
66629	227.3 to 246.4 feet	Key Note Segment		5 ft	96			
66571	244.7 to 245.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
66597	252.3 to 284.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,560**
66598	289.3 to 311.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
66572	301.7 to 302.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
66599	311.3 to 317.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
66600	323.1 to 332.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
66573	327.3 to 328.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
66601	334.7 to 342.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
66602	344.8 to 348.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150828	DEBORAH LN	GRANADA DR	KIMBERLEY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66630	349.2 to 378.8 feet	Key Note Segment		5 ft	148			
66574	359.0 to 360.0 feet	Vertical Change	.29"	5 ft	5	REF		
66575	368.2 to 369.2 feet	Vertical Change	.37"	5 ft	5	REF		
66576	377.8 to 378.8 feet	Vertical Change	.41"	5 ft	5	REF		
66577	381.4 to 382.4 feet	Vertical Change	3.51"	5 ft	5	REF		
66603	381.4 to 387.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
66604	387.4 to 388.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66605	391.3 to 414.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
66606	417.4 to 421.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
66607	421.1 to 428.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
66608	429.3 to 440.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
66631	441.7 to 459.5 feet	Key Note Segment		5 ft	89			
66578	441.8 to 445.8 feet	Vertical Change	.28"	5 ft	20	REF		
66609	462.5 to 466.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
66610	467.0 to 470.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
66611	470.6 to 471.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
66612	471.7 to 475.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
66613	476.2 to 480.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
66614	480.6 to 482.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
66632	482.5 to 512.9 feet	Key Note Segment		5 ft	152			
66579	485.0 to 486.0 feet	Vertical Change	.29"	5 ft	5	REF		
66580	511.0 to 512.0 feet	Vertical Change	.37"	5 ft	5	REF		
66615	514.3 to 525.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
66616	530.6 to 531.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
66617	535.9 to 559.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
66581	560.3 to 561.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
66618	564.3 to 565.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
66619	577.0 to 610.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150828	DEBORAH LN	GRANADA DR	KIMBERLEY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66620	610.2 to 615.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
66633	616.8 to 649.1 feet	Key Note Segment		5 ft	162			
66621	659.8 to 662.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
66634	665.8 to 695.3 feet	Key Note Segment		5 ft	148			
66582	668.9 to 669.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
66583	679.2 to 680.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
66622	695.3 to 696.3 feet	**Cross Slope (Driveway)**	8.0-9.0%	5 ft	5	SF	$40	**$200**
66623	698.1 to 706.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
66624	709.8 to 721.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
66625	723.9 to 729.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
66626	732.2 to 740.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
66584	733.0 to 734.0 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DEBORAH LN** *Starting at:* **GRANADA DR** **$217,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140731	DEBORAH LN	KIMBERLEY LN	PAMELA DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63111	5.4 to 6.4 feet	Vertical Change	.26"	5 ft	5	REF		
63120	5.8 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
63121	17.4 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
63152	19.6 to 38.8 feet	Key Note Segment		5 ft	96			
63112	37.5 to 38.5 feet	Vertical Change	.33"	5 ft	5	REF		
63122	40.3 to 41.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
63123	43.8 to 67.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	$14,400
63153	67.8 to 84.0 feet	Key Note Segment		5 ft	81			
63124	88.5 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
63125	91.9 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
63154	94.8 to 113.5 feet	Key Note Segment		5 ft	94			
63126	115.7 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
63127	148.3 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,660
63128	155.8 to 157.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$780
63155	160.0 to 178.9 feet	Key Note Segment		5 ft	95			
63129	181.6 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
63113	188.3 to 189.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
63156	189.3 to 206.3 feet	Key Note Segment		5 ft	85			
63130	208.3 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
63131	212.1 to 218.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,020
63132	220.8 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
63133	230.0 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
63134	242.8 to 252.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
63157	253.6 to 270.4 feet	Key Note Segment		5 ft	84			
63135	276.4 to 279.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
63136	281.7 to 283.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
63158	283.8 to 298.8 feet	Key Note Segment		5 ft	75			
63137	303.8 to 306.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,860

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140731	DEBORAH LN	KIMBERLEY LN	PAMELA DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63138	309.7 to 311.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
63139	314.4 to 324.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
63140	324.4 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63114	328.8 to 329.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
63141	328.9 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
63142	334.8 to 338.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
63143	340.6 to 346.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
63159	347.1 to 364.6 feet	Key Note Segment		5 ft	88			
63115	356.8 to 357.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63116	364.9 to 365.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
63144	366.7 to 367.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63117	368.5 to 369.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
63145	369.8 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
63118	373.2 to 374.2 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
63146	376.9 to 378.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63160	378.4 to 394.6 feet	Key Note Segment		5 ft	81			
63147	397.7 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
63148	410.4 to 432.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	**$13,500**
63149	434.3 to 436.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
63150	438.3 to 440.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
63161	440.8 to 458.8 feet	Key Note Segment		5 ft	90			
63151	460.8 to 468.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
63162	468.8 to 486.1 feet	Key Note Segment		5 ft	87			
63119	485.2 to 486.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DEBORAH LN** *Starting at:* **KIMBERLEY LN** **$107,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140739	DEBORAH LN	PAMELA DR	GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63183	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
63184	6.1 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
63185	18.4 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
63257	23.5 to 40.6 feet	Key Note Segment		5 ft	86			
63163	40.2 to 41.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
63186	43.5 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
63258	51.8 to 70.3 feet	Key Note Segment		5 ft	93			
63164	52.8 to 53.8 feet	**Vertical Change**	-.4"	5 ft	5	REF		
63187	72.3 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
63188	93.3 to 94.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
63189	101.9 to 104.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
63190	105.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
63191	111.7 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
63259	115.4 to 135.4 feet	Key Note Segment		5 ft	100			
63192	136.9 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63260	142.9 to 163.7 feet	Key Note Segment		5 ft	104			
63193	165.3 to 189.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,580**
63261	190.2 to 208.4 feet	Key Note Segment		5 ft	91			
63194	210.3 to 227.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
63195	228.4 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
63196	234.3 to 243.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
63197	246.2 to 250.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
63165	251.4 to 252.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
63198	251.5 to 252.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
63262	253.5 to 275.3 feet	Key Note Segment		5 ft	109			
63166	254.8 to 255.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
63199	275.7 to 278.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
63167	276.0 to 277.0 feet	**Vertical Change**	.67"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140739	DEBORAH LN	PAMELA DR	GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63200	279.0 to 282.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
63201	283.6 to 295.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
63263	295.7 to 315.1 feet	Key Note Segment		5 ft	97			
63202	317.9 to 323.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
63264	325.5 to 348.4 feet	Key Note Segment		5 ft	115			
63203	349.1 to 355.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
63204	358.5 to 362.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
63205	362.4 to 364.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
63206	370.7 to 374.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
63265	375.5 to 397.3 feet	Key Note Segment		5 ft	109			
63207	399.9 to 423.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
63208	424.1 to 432.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
63209	434.6 to 443.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
63210	446.3 to 454.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
63266	456.8 to 480.8 feet	Key Note Segment		5 ft	120			
63211	481.3 to 482.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$220**
63212	484.7 to 490.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
63168	485.4 to 486.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
63213	493.3 to 506.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
63214	510.7 to 511.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63215	514.3 to 522.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
63216	525.5 to 526.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63169	526.2 to 527.2 feet	**Vertical Change**	.82"	5 ft	5	REF		
63217	528.3 to 548.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	99	SF	$120	**$11,880**
63218	548.1 to 561.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	68	SF	$120	**$8,220**
63267	561.8 to 590.0 feet	Key Note Segment		5 ft	141			
63171	564.1 to 565.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
63172	580.9 to 581.9 feet	**Vertical Change**	.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140739	DEBORAH LN	PAMELA DR	GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63219	592.4 to 599.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
63220	602.8 to 606.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
63221	608.4 to 617.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
63222	619.9 to 649.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	**$17,520**
63223	653.3 to 656.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
63268	657.0 to 685.2 feet	Key Note Segment		5 ft	141			
63173	674.9 to 675.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
63224	688.3 to 698.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
63269	700.8 to 731.3 feet	Key Note Segment		5 ft	153			
63174	701.0 to 702.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
63225	732.8 to 749.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
63226	754.8 to 792.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	191	SF	$120	**$22,860**
63227	793.7 to 795.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
63228	795.8 to 808.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	62	SF	$120	**$7,440**
63229	808.2 to 813.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
63230	815.6 to 828.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
63231	832.7 to 841.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
63270	841.3 to 869.7 feet	Key Note Segment		5 ft	142			
63175	844.1 to 845.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63232	872.3 to 892.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
63176	883.7 to 884.7 feet	**Vertical Change**	2.99"	5 ft	5	REF		
63271	895.4 to 923.6 feet	Key Note Segment		5 ft	141			
63233	926.0 to 927.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
63234	928.2 to 929.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63235	933.8 to 935.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
63236	936.3 to 942.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
63237	946.0 to 949.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
63238	953.2 to 971.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140739	DEBORAH LN	PAMELA DR	GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63239	974.3 to 982.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
63240	985.0 to 1015.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
63241	1017.7 to 1019.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
63242	1020.7 to 1026.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
63272	1026.5 to 1057.5 feet	Key Note Segment		5 ft	155			
63177	1056.8 to 1057.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
63243	1059.7 to 1060.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
63244	1064.8 to 1066.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63273	1072.7 to 1100.1 feet	Key Note Segment		5 ft	137			
63178	1073.6 to 1074.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
63179	1086.3 to 1087.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
63180	1094.0 to 1095.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
63245	1100.1 to 1102.6 feet	**Cross Slope (Driveway)**	9.0-10.0%	5 ft	13	SF	$40	**$500**
63274	1102.4 to 1104.6 feet		6.0-7.0%	5 ft	11			
63275	1102.4 to 1104.6 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
63246	1109.9 to 1132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,620**
63247	1139.3 to 1140.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
63248	1142.8 to 1147.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
63249	1147.8 to 1152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
63250	1155.3 to 1169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
63251	1173.0 to 1177.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
63181	1178.7 to 1179.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
63252	1180.2 to 1181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63253	1185.3 to 1189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
63254	1192.3 to 1193.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63255	1203.0 to 1214.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
63182	1204.1 to 1205.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
63256	1214.5 to 1226.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140739	DEBORAH LN	PAMELA DR	GRANADA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **DEBORAH LN**	*Starting at:* **PAMELA DR**						**$369,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2110211020	DEERWOOD CT	DEERWOOD DR	DEERWOOD DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78770	0.1 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
78771	6.4 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
78772	10.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
78795	13.3 to 29.6 feet	Key Note Segment		5 ft	82			
78773	30.7 to 36.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
78774	39.1 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
78796	53.0 to 84.2 feet	Key Note Segment		5 ft	156			
78775	84.8 to 87.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
78776	90.9 to 99.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
78777	99.9 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
78797	121.7 to 153.7 feet	Key Note Segment		5 ft	160			
78760	127.6 to 128.6 feet	**Vertical Change**	.74"	5 ft	5	REF		
78778	154.9 to 165.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
78761	156.1 to 157.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
78762	160.6 to 161.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
78779	168.7 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
78780	180.6 to 182.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
78798	183.0 to 216.6 feet	Key Note Segment		5 ft	168			
78781	216.9 to 218.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
78799	219.4 to 237.0 feet	Key Note Segment		5 ft	88			
78782	237.0 to 238.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
78783	239.2 to 242.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
78800	242.4 to 274.6 feet	Key Note Segment		5 ft	161			
78763	244.0 to 245.0 feet	**Vertical Change**	.56"	5 ft	5	REF		
78784	276.5 to 277.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
78801	278.9 to 296.8 feet	Key Note Segment		5 ft	90			
78785	297.5 to 303.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
78764	306.6 to 307.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2110211020	DEERWOOD CT	DEERWOOD DR	DEERWOOD DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78765	310.3 to 311.3 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
78786	311.7 to 316.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
78802	316.8 to 348.3 feet	Key Note Segment		5 ft	158			
78787	350.8 to 356.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	27	SF	$120	$3,240
78788	357.5 to 371.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	$8,460
78789	371.8 to 380.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$5,040
78790	380.2 to 385.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
78803	386.2 to 418.4 feet	Key Note Segment		5 ft	161			
78791	420.0 to 425.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
78792	429.6 to 440.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,420
78804	440.4 to 458.3 feet	Key Note Segment		5 ft	90			
78767	441.7 to 442.7 feet	Vertical Change	-.28"	5 ft	5	REF		
78768	457.2 to 458.2 feet	Vertical Change	-.28"	5 ft	5	REF		
78793	463.6 to 465.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
78794	467.4 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	$12,240
78769	471.7 to 472.7 feet	Vertical Change	.26"	5 ft	5	REF		

TOTAL COST FOR: W/S/E *side of* **DEERWOOD CT** *Starting at:* **DEERWOOD DR** **$99,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211013	DEERWOOD DR	BLUERIDGE DR	STADIUM RD	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78740	2.3 to 7.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
78741	7.6 to 10.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
78742	12.8 to 18.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
78744	18.4 to 51.8 feet	Key Note Segment		5 ft	167			
78743	52.3 to 67.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	75	SF	$40	**$3,000**
78739	57.3 to 58.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **DEERWOOD DR** *Starting at:* **BLUERIDGE DR** **$11,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211023	DEERWOOD DR	DEERWOOD CT	OAKRIDGE DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78808	2.1 to 7.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
78809	7.6 to 15.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
78810	17.2 to 32.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
78805	32.5 to 33.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
78806	37.1 to 38.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
78811	38.3 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
78812	40.9 to 46.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
78813	47.2 to 51.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
78814	52.5 to 58.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
78815	60.7 to 62.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
78820	65.4 to 80.3 feet	Key Note Segment		5 ft	74			
78816	81.3 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,200**
78817	104.8 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
78818	117.9 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
78819	147.0 to 153.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
78807	147.8 to 148.8 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **DEERWOOD DR** *Starting at:* **DEERWOOD CT** **$69,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211031	DEERWOOD DR	OAKRIDGE DR	BLUERIDGE DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78871	0.0 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
78890	4.7 to 22.5 feet	Key Note Segment		5 ft	89			
78872	24.1 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
78891	26.6 to 44.9 feet	Key Note Segment		5 ft	92			
78873	60.7 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
78874	62.9 to 64.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
78892	65.0 to 97.6 feet	Key Note Segment		5 ft	163			
78864	89.1 to 90.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
78875	97.8 to 99.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$240**
78876	99.3 to 100.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
78877	100.5 to 110.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,820**
78878	110.2 to 114.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
78866	113.6 to 114.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
78879	114.6 to 119.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
78893	119.9 to 137.9 feet	Key Note Segment		5 ft	90			
78880	139.8 to 150.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
78881	151.8 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
78867	153.6 to 154.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78882	169.2 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
78894	175.8 to 206.6 feet	Key Note Segment		5 ft	154			
78883	207.6 to 208.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
78884	208.9 to 211.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
78885	214.7 to 243.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,460**
78868	226.0 to 227.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
78869	238.8 to 239.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
78895	245.8 to 277.6 feet	Key Note Segment		5 ft	159			
78886	278.5 to 303.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	127	SF	$40	**$5,060**
78887	305.9 to 314.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211031	DEERWOOD DR	OAKRIDGE DR	BLUERIDGE DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78896	314.9 to 346.3 feet	Key Note Segment		5 ft	157			
78870	324.0 to 325.0 feet	**Vertical Change**	2.44"	5 ft	5	REF		
78888	347.3 to 357.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
78889	359.6 to 361.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **DEERWOOD DR** *Starting at:* **OAKRIDGE DR** **$70,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211043	DEERWOOD DR	SANTA BONITA ST	SANTA BONITA ST	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78997	0.2 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
78998	6.8 to 21.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
79004	21.2 to 41.4 feet	Key Note Segment		5 ft	101			
78999	42.3 to 45.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
78996	47.3 to 48.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
79000	47.6 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
79001	67.5 to 69.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
79005	70.2 to 107.6 feet	Key Note Segment		5 ft	187			
79002	109.6 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
79003	121.8 to 123.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **DEERWOOD DR** *Starting at:* **SANTA BONITA ST** **$28,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210920	DEERWOOD DR	SANTA BONITA ST	SANTA BONITA ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78278	1.7 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,020**
78281	24.4 to 45.3 feet	Key Note Segment		5 ft	105			
78276	25.7 to 26.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
78277	34.6 to 35.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78279	49.4 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
78280	65.6 to 70.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
78282	69.4 to 70.5 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **DEERWOOD DR** *Starting at:* **SANTA BONITA ST** **$20,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191216	DEL LAGO WAY	KNOX ST	RANCHO MIRAGE RD	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73951	38.4 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
73952	46.9 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: S *side of* **DEL LAGO WAY** *Starting at:* **KNOX ST** **$5,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191214	DEL LAGO WAY	RANCHO MIRAGE RD	KNOX ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73950	2.9 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
73947	3.6 to 4.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
73948	30.8 to 31.8 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
73949	36.8 to 37.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **DEL LAGO WAY** *Starting at:* **RANCHO MIRAGE RD** **$2,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031358	DELLAVALLE AVE	E RIVERSIDE DR	W SOUTH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120360	1.4 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
120361	15.3 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
120362	23.4 to 34.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
120386	38.8 to 62.0 feet	Key Note Segment		5 ft	116			
120355	50.2 to 51.2 feet	**Vertical Change**	-.44"	5 ft	5	REF		
120356	53.9 to 54.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
120363	62.9 to 67.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
120364	68.8 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
120365	73.6 to 83.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
120357	83.5 to 84.5 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
120387	83.6 to 106.4 feet	Key Note Segment		5 ft	114			
120366	107.8 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
120367	116.3 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
120358	119.1 to 120.1 feet	**Vertical Change**	3.47"	5 ft	5	REF		
120368	122.2 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
120388	133.2 to 155.9 feet	Key Note Segment		5 ft	114			
120359	156.9 to 157.9 feet	**Vertical Change**	.62"	5 ft	5	REF		
120369	157.3 to 176.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
120370	178.1 to 184.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
120371	186.8 to 195.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
120372	196.2 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120373	201.8 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
120374	220.4 to 225.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
120375	229.2 to 232.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
120376	232.7 to 236.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
120377	240.5 to 242.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
120378	248.0 to 255.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
120379	255.4 to 260.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031358	DELLAVALLE AVE	E RIVERSIDE DR	W SOUTH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120380	263.3 to 265.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
120381	267.3 to 278.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
120382	280.6 to 282.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
120383	284.8 to 286.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
120384	288.3 to 294.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
120385	298.7 to 299.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **DELLAVALLE AVE** *Starting at:* **E RIVERSIDE DR** **$101,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031355	DELLAVALLE AVE	W SOUTH ST	E RIVERSIDE DR	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120321	2.9 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
120322	12.3 to 13.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
120323	16.2 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
120324	18.8 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
120325	29.5 to 35.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
120326	36.5 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
120350	38.3 to 46.2 feet	Key Note Segment		5 ft	40			
120327	46.6 to 48.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
120328	48.3 to 49.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
120299	49.9 to 50.9 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
120329	57.6 to 59.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
120300	62.8 to 63.8 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
120301	65.1 to 66.1 feet	**Vertical Change**	-1.23"	5 ft	5	SF	$75	**$375**
120330	66.6 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120302	70.3 to 71.3 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
120351	86.2 to 91.8 feet	Key Note Segment		5 ft	28			
120331	93.6 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
120332	106.8 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
120333	115.2 to 118.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
120334	120.6 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120303	123.6 to 124.6 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
120352	135.0 to 140.4 feet	Key Note Segment		5 ft	27			
120335	140.4 to 142.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
120336	145.2 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
120353	151.5 to 161.2 feet	Key Note Segment		5 ft	48			
120337	161.3 to 162.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$220**
120304	161.7 to 162.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
120338	164.3 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031355	DELLAVALLE AVE	W SOUTH ST	E RIVERSIDE DR	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120339	181.3 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
120305	187.8 to 188.8 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
120340	189.6 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120341	194.9 to 207.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
120342	209.9 to 215.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
120354	215.9 to 223.9 feet	Key Note Segment		5 ft	40			
120306	216.8 to 217.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
120343	229.1 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
120344	243.5 to 244.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
120345	246.6 to 248.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
120346	251.7 to 255.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
120347	255.6 to 265.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
120309	264.5 to 267.3 feet	**Vertical Change**	.27"	5 ft	14	REF		
120310	268.0 to 269.0 feet	**Vertical Change**	-1.07"	5 ft	5	SF	$75	**$375**
120311	270.0 to 271.0 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
120312	271.8 to 272.8 feet	**Vertical Change**	-.55"	5 ft	5	SF	$75	**$375**
120313	273.5 to 274.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
120348	273.6 to 288.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
120314	275.3 to 276.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
120315	277.0 to 279.9 feet	**Vertical Change**	-.41"	5 ft	14	REF		
120316	280.7 to 285.1 feet	**Vertical Change**	.33"	5 ft	22	REF		
120349	288.6 to 291.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
120318	290.7 to 291.7 feet	**Vertical Change**	1.15"	5 ft	5	REF		
120319	293.1 to 294.1 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
120320	294.8 to 295.8 feet	**Vertical Change**	1.76"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W *side of* **DELLAVALLE AVE** *Starting at:* **W SOUTH ST** **$80,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121000	DESERT RANCH WAY	2796 DESERT RANCH WAY	GRANADA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94109	0.0 to 9.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
94110	9.8 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
94111	15.7 to 23.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
94090	19.7 to 20.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
94112	26.6 to 27.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
94113	32.3 to 33.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
94114	36.7 to 40.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
94115	40.8 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94116	44.3 to 48.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
94117	52.8 to 63.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
94159	63.3 to 82.7 feet	Key Note Segment		5 ft	97			
94091	64.0 to 65.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94092	73.5 to 74.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
94093	87.3 to 88.3 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
94160	91.1 to 111.3 feet	Key Note Segment		5 ft	101			
94118	112.8 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
94119	125.0 to 129.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
94120	129.5 to 137.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
94121	140.8 to 143.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
94122	144.3 to 149.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
94123	149.3 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
94124	153.3 to 158.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,060**
94125	160.6 to 171.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
94161	171.6 to 191.8 feet	Key Note Segment		5 ft	101			
94126	195.4 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94162	198.4 to 218.9 feet	Key Note Segment		5 ft	103			
94127	219.1 to 231.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	63	SF	$40	**$2,500**
94128	231.6 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121000	DESERT RANCH WAY	2796 DESERT RANCH WAY	GRANADA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94094	235.2 to 236.2 feet	Vertical Change	-.41"	5 ft	5	REF		
94129	236.2 to 243.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
94130	243.8 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
94131	248.3 to 250.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,380
94132	252.5 to 261.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
94095	257.0 to 258.0 feet	Vertical Change	.26"	5 ft	5	REF		
94133	265.0 to 267.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
94134	269.2 to 271.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,440
94135	271.6 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
94163	276.1 to 297.5 feet	Key Note Segment		5 ft	107			
94096	277.6 to 278.6 feet	Vertical Change	.45"	5 ft	5	REF		
94097	286.7 to 287.7 feet	Vertical Change	.49"	5 ft	5	REF		
94136	299.8 to 303.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
94164	304.3 to 324.2 feet	Key Note Segment		5 ft	100			
94098	323.8 to 324.8 feet	Vertical Change	-.31"	5 ft	5	REF		
94137	326.3 to 327.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
94099	335.0 to 336.0 feet	Vertical Change	-.29"	5 ft	5	REF		
94138	335.1 to 339.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
94139	340.3 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,100
94165	358.8 to 378.4 feet	Key Note Segment		5 ft	98			
94100	369.7 to 370.7 feet	Vertical Change	.29"	5 ft	5	REF		
94101	378.3 to 379.3 feet	Vertical Change	.46"	5 ft	5	REF		
94140	384.0 to 390.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,080
94102	390.6 to 391.6 feet	Vertical Change	-.34"	5 ft	5	REF		
94141	391.9 to 393.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
94142	394.0 to 395.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
94143	398.8 to 400.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
94144	400.3 to 406.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121000	DESERT RANCH WAY	2796 DESERT RANCH WAY	GRANADA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94145	412.9 to 413.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94146	414.4 to 425.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
94147	425.5 to 428.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
94148	430.9 to 432.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
94166	437.5 to 458.3 feet	Key Note Segment		5 ft	104			
94149	459.7 to 460.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94150	465.2 to 468.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
94151	468.9 to 476.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
94152	479.7 to 480.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94104	482.4 to 483.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
94153	483.6 to 487.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
94154	488.9 to 492.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
94167	493.3 to 514.3 feet	Key Note Segment		5 ft	105			
94155	514.7 to 519.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
94168	521.3 to 541.3 feet	Key Note Segment		5 ft	100			
94105	522.2 to 523.2 feet	**Vertical Change**	-.54"	5 ft	5	REF		
94106	541.0 to 542.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
94107	548.2 to 549.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
94156	548.6 to 549.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94157	552.1 to 553.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94108	556.0 to 557.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
94158	557.8 to 559.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: S *side of* **DESERT RANCH WAY** *Starting at:* **2796 DESERT RANCH WAY** **$133,405.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121002	DESERT RANCH WAY	GRANADA DR	TOSCHI DRIVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94173	0.3 to 12.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
94169	2.9 to 3.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
94174	15.4 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
94175	29.7 to 33.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
94170	32.7 to 33.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
94176	33.7 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
94177	39.4 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
94178	45.3 to 50.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
94179	50.4 to 51.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
94180	54.1 to 63.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
94171	57.1 to 58.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
94181	64.2 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94182	68.0 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
94183	70.8 to 78.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
94184	76.4 to 79.2 feet		5.0-6.0%	5 ft	14			
94185	76.4 to 79.2 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
94172	79.1 to 80.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **DESERT RANCH WAY** *Starting at:* **GRANADA DR** **$40,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120955	DESERT RANCH WAY	MAKENNA DR	2816 DESERT RANCH WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94040	11.0 to 12.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
94058	18.8 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
94059	29.8 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360
94060	40.4 to 41.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
94083	41.9 to 67.8 feet	Key Note Segment		5 ft	130			
94061	68.3 to 73.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	25	SF	$40	$1,000
94084	73.3 to 95.6 feet	Key Note Segment		5 ft	112			
94041	83.7 to 84.7 feet	Vertical Change	-.29"	5 ft	5	REF		
94062	95.6 to 100.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	24	SF	$40	$940
94063	101.0 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
94042	101.8 to 102.8 feet	Vertical Change	.29"	5 ft	5	REF		
94064	105.5 to 117.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,200
94065	119.9 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
94043	123.4 to 124.4 feet	Vertical Change	-.27"	5 ft	5	REF		
94066	123.8 to 133.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,880
94044	136.0 to 137.0 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
94067	139.1 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,060
94068	144.2 to 145.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
94069	147.3 to 149.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
94070	153.0 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
94085	159.8 to 181.3 feet	Key Note Segment		5 ft	107			
94045	170.6 to 171.6 feet	Vertical Change	.33"	5 ft	5	REF		
94071	184.7 to 186.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
94086	187.5 to 207.8 feet	Key Note Segment		5 ft	102			
94046	197.7 to 198.7 feet	Vertical Change	.31"	5 ft	5	REF		
94047	207.6 to 208.6 feet	Vertical Change	.27"	5 ft	5	REF		
94072	212.0 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	$12,180
94049	226.1 to 227.1 feet	Vertical Change	.52"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120955	DESERT RANCH WAY	MAKENNA DR	2816 DESERT RANCH WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94050	234.8 to 235.8 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
94073	240.6 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
94074	247.1 to 275.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	$16,920
94051	263.9 to 264.9 feet	Vertical Change	.45"	5 ft	5	REF		
94087	275.3 to 295.6 feet	Key Note Segment		5 ft	102			
94052	285.8 to 286.8 feet	Vertical Change	.32"	5 ft	5	REF		
94075	297.0 to 299.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
94076	299.7 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
94088	305.4 to 326.4 feet	Key Note Segment		5 ft	105			
94053	316.0 to 317.0 feet	Vertical Change	.33"	5 ft	5	REF		
94054	325.5 to 326.5 feet	Vertical Change	.28"	5 ft	5	REF		
94077	326.5 to 356.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	148	SF	$40	$5,920
94055	334.5 to 335.5 feet	Vertical Change	-.53"	5 ft	5	REF		
94078	359.2 to 372.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160
94056	366.5 to 367.5 feet	Vertical Change	-.3"	5 ft	5	REF		
94079	372.8 to 376.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,920
94080	378.2 to 386.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,740
94081	388.5 to 390.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
94089	390.7 to 411.6 feet	Key Note Segment		5 ft	105			
94057	394.2 to 395.2 feet	Vertical Change	.48"	5 ft	5	REF		
94082	412.4 to 417.2 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	24	SF	$40	$960

TOTAL COST FOR: S *side of* **DESERT RANCH WAY** *Starting at:* **MAKENNA DR** **$96,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111331	DESERT RANCH WAY	S DOUBLE TREE WAY	S WOLFTRAP ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92052	1.2 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
92053	15.5 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
92071	25.5 to 45.3 feet	Key Note Segment		5 ft	99			
92054	46.9 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
92055	51.8 to 53.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
92072	55.1 to 74.0 feet	Key Note Segment		5 ft	95			
92056	75.8 to 93.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
92047	90.8 to 91.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
92057	96.8 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
92058	117.8 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92059	121.9 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
92060	131.6 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
92061	136.8 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
92062	141.2 to 144.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
92073	144.9 to 165.5 feet	Key Note Segment		5 ft	103			
92048	155.6 to 156.6 feet	**Vertical Change**	-.53"	5 ft	5	REF		
92049	165.1 to 166.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92063	166.3 to 167.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
92064	167.8 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
92074	173.8 to 194.5 feet	Key Note Segment		5 ft	104			
92050	175.3 to 176.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
92065	195.9 to 199.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
92066	202.1 to 234.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	161	SF	$120	**$19,320**
92075	234.3 to 255.0 feet	Key Note Segment		5 ft	104			
92051	244.5 to 245.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
92067	256.5 to 266.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
92068	269.0 to 272.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
92069	275.8 to 276.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111331	DESERT RANCH WAY	S DOUBLE TREE WAY	S WOLFTRAP ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92070	279.0 to 281.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: S *side of* **DESERT RANCH WAY** *Starting at:* **S DOUBLE TREE WAY** **$79,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111328	DESERT RANCH WAY	S WOLFTRAP ST	S DOUBLE TREE WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92018	0.0 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
92008	3.2 to 4.2 feet	**Vertical Change**	2.15"	5 ft	5	REF		
92019	10.8 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
92020	16.3 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
92038	25.1 to 62.1 feet	Key Note Segment		5 ft	185			
92021	68.0 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
92022	79.3 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
92023	87.3 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
92009	88.6 to 89.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
92024	96.3 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
92039	103.2 to 123.7 feet	Key Note Segment		5 ft	103			
92010	113.2 to 114.2 feet	**Vertical Change**	-.5"	5 ft	5	REF		
92025	124.8 to 131.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
92040	131.9 to 152.9 feet	Key Note Segment		5 ft	105			
92011	152.2 to 153.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
92026	152.9 to 161.1 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	41	SF	$40	**$1,640**
92012	161.7 to 162.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
92027	162.4 to 174.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
92028	174.5 to 177.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
92029	177.4 to 216.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	194	SF	$120	**$23,280**
92013	195.0 to 196.0 feet	**Vertical Change**	3.46"	5 ft	5	REF		
92041	216.2 to 237.1 feet	Key Note Segment		5 ft	105			
92030	240.3 to 245.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
92042	245.8 to 265.1 feet	Key Note Segment		5 ft	97			
92015	262.0 to 263.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
92031	267.0 to 305.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	193	SF	$120	**$23,160**
92016	288.0 to 289.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
92032	307.8 to 309.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111328	DESERT RANCH WAY	S WOLFTRAP ST	S DOUBLE TREE WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92033	311.6 to 313.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
92034	318.2 to 328.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
92017	324.1 to 325.1 feet	**Vertical Change**	2.59"	5 ft	5	REF		
92043	328.6 to 349.1 feet	Key Note Segment		5 ft	103			
92035	350.3 to 357.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
92044	358.3 to 378.3 feet	Key Note Segment		5 ft	100			
92036	379.0 to 393.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
92037	394.0 to 401.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
92045	398.3 to 401.1 feet		5.0-6.0%	5 ft	14			
92046	398.3 to 401.1 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **DESERT RANCH WAY** *Starting at:* **S WOLFTRAP ST** **$115,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121026	DESERT RANCH WAY	TOSCHI DRIVE	MAKENNA DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94367	8.8 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$900**
94368	14.0 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
94369	19.5 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
94437	21.3 to 42.5 feet	Key Note Segment		5 ft	106			
94351	22.6 to 23.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
94370	43.9 to 49.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
94352	44.2 to 45.2 feet	**Vertical Change**	-.44"	5 ft	5	REF		
94438	49.3 to 70.3 feet	Key Note Segment		5 ft	105			
94371	70.7 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
94372	74.2 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
94353	82.1 to 83.1 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
94373	85.0 to 92.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
94354	88.5 to 89.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
94452	89.1 to 90.3 feet		5.0-6.0%	5 ft	6			
94374	93.3 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
94375	110.5 to 119.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
94355	111.1 to 112.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
94376	124.1 to 131.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
94377	134.1 to 135.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
94439	136.2 to 155.8 feet	Key Note Segment		5 ft	98			
94356	145.0 to 146.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
94378	155.9 to 157.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
94379	157.7 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94440	163.2 to 183.7 feet	Key Note Segment		5 ft	103			
94380	183.7 to 209.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	130	SF	$40	**$5,180**
94381	209.8 to 226.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
94382	226.6 to 231.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
94383	231.6 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121026	DESERT RANCH WAY	TOSCHI DRIVE	MAKENNA DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94384	235.5 to 237.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
94357	235.7 to 236.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
94385	238.0 to 239.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94386	243.8 to 245.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
94441	247.1 to 268.1 feet	Key Note Segment		5 ft	105			
94387	268.7 to 273.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
94442	274.0 to 295.5 feet	Key Note Segment		5 ft	108			
94388	296.5 to 297.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$240**
94389	300.8 to 309.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
94390	312.8 to 319.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
94358	321.9 to 322.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
94391	324.8 to 325.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94392	326.8 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
94393	340.4 to 341.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
94394	344.6 to 347.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
94395	348.0 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
94396	352.9 to 358.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
94443	358.3 to 378.6 feet	Key Note Segment		5 ft	102			
94397	380.3 to 381.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94398	383.8 to 398.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
94399	401.4 to 402.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
94400	405.0 to 406.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
94401	409.7 to 411.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
94444	412.3 to 433.5 feet	Key Note Segment		5 ft	106			
94402	435.8 to 439.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
94403	439.8 to 441.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
94445	442.6 to 463.3 feet	Key Note Segment		5 ft	104			
94404	463.5 to 465.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121026	DESERT RANCH WAY	TOSCHI DRIVE	MAKENNA DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94405	470.3 to 476.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
94406	481.5 to 482.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94407	486.7 to 491.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
94453	494.6 to 495.9 feet		5.0-6.0%	5 ft	7			
94408	495.7 to 513.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
94409	514.5 to 519.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
94446	519.5 to 540.3 feet	Key Note Segment		5 ft	104			
94359	530.5 to 531.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
94410	540.7 to 543.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
94411	544.9 to 546.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
94360	547.3 to 548.3 feet	**Vertical Change**	1.41"	5 ft	5	SF	$75	**$375**
94412	548.5 to 550.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94447	550.8 to 570.9 feet	Key Note Segment		5 ft	101			
94413	574.3 to 582.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
94414	585.0 to 597.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
94415	600.0 to 604.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
94416	607.4 to 612.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
94417	612.7 to 617.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
94418	620.9 to 625.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
94448	626.8 to 647.0 feet	Key Note Segment		5 ft	101			
94361	628.0 to 629.0 feet	**Vertical Change**	-.61"	5 ft	5	REF		
94362	646.9 to 647.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
94419	647.1 to 655.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	41	SF	$40	**$1,640**
94449	656.8 to 677.3 feet	Key Note Segment		5 ft	103			
94420	678.1 to 679.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
94421	684.3 to 687.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
94422	687.8 to 693.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
94423	694.7 to 695.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121026	DESERT RANCH WAY	TOSCHI DRIVE	MAKENNA DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94424	698.2 to 701.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
94425	702.0 to 706.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
94426	706.3 to 714.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
94363	709.9 to 710.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
94427	714.4 to 716.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
94428	719.2 to 726.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
94429	728.8 to 735.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
94450	735.0 to 755.3 feet	Key Note Segment		5 ft	102			
94430	755.6 to 756.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
94431	758.7 to 759.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94432	760.9 to 762.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94364	761.3 to 762.3 feet	**Vertical Change**	.58"	5 ft	5	REF		
94451	765.3 to 785.9 feet	Key Note Segment		5 ft	103			
94365	776.0 to 777.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
94433	787.3 to 798.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
94434	800.6 to 802.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
94435	804.6 to 805.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
94436	806.5 to 808.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
94366	809.5 to 810.5 feet	**Vertical Change**	.88"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **DESERT RANCH WAY** *Starting at:* **TOSCHI DRIVE** **$191,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181611	DIAMANTE LN	IVY GLEN DR	ORCHARD HILL DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102154	0.3 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
102155	5.6 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
102140	5.9 to 6.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
102156	18.0 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
102170	20.5 to 45.3 feet	Key Note Segment		5 ft	124			
102141	34.8 to 35.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
102157	46.3 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
102158	51.2 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
102142	52.6 to 53.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
102159	55.2 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
102143	61.3 to 62.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
102160	66.6 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102171	67.7 to 98.5 feet	Key Note Segment		5 ft	154			
102144	88.4 to 89.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
102161	99.7 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
102172	102.0 to 124.3 feet	Key Note Segment		5 ft	112			
102145	102.1 to 103.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
102146	124.5 to 125.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
102162	125.2 to 126.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
102163	127.8 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
102147	136.3 to 137.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
102148	152.7 to 153.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
102164	158.5 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
102165	162.9 to 164.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
102166	164.6 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
102173	167.7 to 198.7 feet	Key Note Segment		5 ft	155			
102149	168.5 to 169.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
102150	198.8 to 199.8 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181611	DIAMANTE LN	IVY GLEN DR	ORCHARD HILL DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102174	203.3 to 224.4 feet	Key Note Segment		5 ft	106			
102167	224.4 to 243.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	94	SF	$40	**$3,740**
102151	224.9 to 225.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
102152	229.7 to 230.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
102168	245.3 to 246.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
102169	247.3 to 248.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102153	248.8 to 249.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **DIAMANTE LN** *Starting at:* **IVY GLEN DR** **$44,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201226	DIAMOND WAY	BO TREE LN	JOYA DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76502	0.8 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
76503	23.0 to 57.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	172	SF	$120	**$20,640**
76504	58.1 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
76505	64.8 to 71.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
76506	71.6 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
76507	86.9 to 94.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
76508	99.1 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76509	102.9 to 120.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
76510	122.8 to 131.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**

TOTAL COST FOR: E *side of* **DIAMOND WAY** *Starting at:* **BO TREE LN** **$68,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201225	DIAMOND WAY	GARY LN	BO TREE LN	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76490	0.0 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
76498	20.1 to 38.7 feet	Key Note Segment		5 ft	93			
76488	38.8 to 39.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
76491	38.9 to 45.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
76499	45.1 to 65.1 feet	Key Note Segment		5 ft	100			
76492	65.4 to 69.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$840**
76493	80.5 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
76500	87.8 to 107.8 feet	Key Note Segment		5 ft	100			
76494	109.4 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
76489	114.2 to 115.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
76495	131.1 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
76496	147.3 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
76497	182.5 to 202.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
76501	202.0 to 203.1 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **DIAMOND WAY** *Starting at:* **GARY LN** **$64,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201100	DIAMOND WAY	GARY LN	STRAUSS CT	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75763	0.0 to 9.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,914**
75748	7.3 to 8.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
75764	11.9 to 19.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,942**
75750	18.9 to 19.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
75765	21.8 to 26.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,538**
75784	30.9 to 52.9 feet	Key Note Segment		5 ft	99			
75751	31.6 to 32.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
75752	34.9 to 35.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
75766	53.1 to 56.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$666**
75785	57.1 to 79.0 feet	Key Note Segment		5 ft	99			
75767	79.0 to 101.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	101	SF	$40	**$4,050**
75768	105.3 to 111.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,348**
75769	111.5 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,642**
75770	123.8 to 129.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,024**
75786	129.8 to 150.9 feet	Key Note Segment		5 ft	95			
75753	138.2 to 139.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
75771	152.9 to 155.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,512**
75787	156.1 to 176.8 feet	Key Note Segment		5 ft	93			
75754	176.5 to 177.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		
75772	177.7 to 197.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,692**
75773	197.5 to 204.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,672**
75755	197.6 to 198.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
75774	205.0 to 224.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,692**
75775	227.5 to 229.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$972**
75788	229.4 to 250.2 feet	Key Note Segment		5 ft	94			
75756	230.1 to 231.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
75757	250.1 to 251.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
75776	252.7 to 254.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201100	DIAMOND WAY	GARY LN	STRAUSS CT	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75789	254.8 to 275.8 feet	Key Note Segment		5 ft	95			
75758	255.6 to 256.6 feet	Vertical Change	.31"	5 ft	5	REF		
75777	277.2 to 291.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,884**
75778	291.8 to 300.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,752**
75779	302.4 to 304.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
75780	304.0 to 322.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,098**
75759	308.5 to 309.5 feet	Vertical Change	.82"	5 ft	5	REF		
75790	330.8 to 351.8 feet	Key Note Segment		5 ft	95			
75781	352.2 to 358.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	**$1,170**
75791	358.8 to 378.5 feet	Key Note Segment		5 ft	89			
75760	368.9 to 369.9 feet	Vertical Change	-.29"	5 ft	5	REF		
75761	378.3 to 379.3 feet	Vertical Change	-.26"	5 ft	5	REF		
75782	380.5 to 399.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,044**
75783	399.1 to 408.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,076**
75762	400.1 to 401.1 feet	Vertical Change	-.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DIAMOND WAY** *Starting at:* **GARY LN** **$97,578.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201053	DIAMOND WAY	JOYA DR	GARY LN	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75699	5.1 to 14.5 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	47	SF	$120	**$5,640**
75700	14.5 to 17.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	17	SF	$120	**$1,980**
75701	20.9 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
75702	36.7 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
75730	38.7 to 59.8 feet	Key Note Segment		5 ft	105			
75703	59.8 to 65.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
75704	65.3 to 78.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
75691	72.6 to 73.6 feet	Vertical Change	.26"	5 ft	5	REF		
75705	81.3 to 83.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
75692	82.6 to 85.6 feet	Vertical Change	-.31"	5 ft	15	REF		
75731	83.8 to 103.7 feet	Key Note Segment		5 ft	100			
75706	104.2 to 105.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
75707	105.5 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
75708	110.2 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
75732	126.4 to 146.5 feet	Key Note Segment		5 ft	101			
75693	129.8 to 130.8 feet	Vertical Change	.27"	5 ft	5	REF		
75709	146.9 to 151.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
75733	152.1 to 173.0 feet	Key Note Segment		5 ft	105			
75710	173.0 to 174.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	7	SF	$40	**$260**
75711	175.8 to 179.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
75712	180.8 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
75713	188.3 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
75734	211.8 to 231.3 feet	Key Note Segment		5 ft	98			
75694	222.1 to 223.1 feet	Vertical Change	-.41"	5 ft	5	REF		
75714	234.3 to 235.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
75735	238.2 to 258.5 feet	Key Note Segment		5 ft	102			
75715	262.3 to 270.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
75716	270.6 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201053	DIAMOND WAY	JOYA DR	GARY LN	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75717	275.8 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
75718	288.3 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
75736	299.5 to 320.5 feet	Key Note Segment		5 ft	105			
75719	320.5 to 323.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
75720	323.8 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
75737	325.8 to 346.4 feet	Key Note Segment		5 ft	103			
75721	348.7 to 352.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
75722	355.9 to 364.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
75723	364.8 to 390.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
75724	393.7 to 404.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
75738	404.8 to 425.3 feet	Key Note Segment		5 ft	103			
75696	406.0 to 407.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
75725	427.8 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
75739	431.3 to 451.3 feet	Key Note Segment		5 ft	100			
75726	452.4 to 464.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
75727	464.5 to 469.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
75728	471.2 to 473.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
75729	476.7 to 487.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
75698	487.1 to 488.1 feet	**Vertical Change**	.69"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DIAMOND WAY** *Starting at:* **JOYA DR** **$121,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201125	DIAMOND WAY	STRAUSS CT	GARY LN	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76040	1.3 to 3.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$972**
76041	3.3 to 10.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,618**
76028	11.8 to 12.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$338**
76042	17.8 to 23.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,024**
76043	26.2 to 31.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,754**
76044	31.3 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
76045	36.1 to 38.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,404**
76046	42.2 to 43.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$594**
76047	46.1 to 59.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,344**
76048	59.7 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
76068	62.6 to 77.0 feet	Key Note Segment		5 ft	65			
76049	77.8 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,834**
76050	87.7 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,372**
76051	102.8 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
76069	104.6 to 124.7 feet	Key Note Segment		5 ft	90			
76052	126.3 to 129.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,674**
76070	129.4 to 150.5 feet	Key Note Segment		5 ft	95			
76029	130.5 to 131.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
76053	154.8 to 169.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,100**
76030	164.4 to 165.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
76054	175.8 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
76031	198.4 to 199.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$338**
76055	200.4 to 203.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,566**
76056	203.3 to 204.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
76071	204.8 to 226.8 feet	Key Note Segment		5 ft	99			
76032	225.9 to 226.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
76057	228.8 to 230.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$756**
76072	231.2 to 252.2 feet	Key Note Segment		5 ft	95			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201125	DIAMOND WAY	STRAUSS CT	GARY LN	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76033	232.0 to 233.0 feet	Vertical Change	.26"	5 ft	5	REF		
76034	239.4 to 240.4 feet	Vertical Change	.34"	5 ft	5	REF		
76058	253.5 to 254.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
76059	257.2 to 264.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,996**
76060	265.3 to 268.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,458**
76061	268.5 to 274.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,970**
76035	269.4 to 270.4 feet	Vertical Change	.29"	5 ft	5	REF		
76062	275.3 to 283.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
76063	285.7 to 291.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,862**
76064	296.2 to 307.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
76073	308.2 to 329.0 feet	Key Note Segment		5 ft	94			
76065	329.2 to 334.1 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	22	SF	$40	**$882**
76074	334.4 to 355.3 feet	Key Note Segment		5 ft	94			
76036	360.1 to 361.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$338**
76066	371.5 to 372.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$540**
76038	374.2 to 375.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$338**
76067	377.8 to 383.4 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	25	SF	$120	**$3,024**
76075	381.5 to 383.3 feet		5.0-6.0%	5 ft	8			
76039	382.6 to 383.6 feet	Vertical Change	-.37"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **DIAMOND WAY** *Starting at:* **STRAUSS CT** **$86,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161107	DIANE WAY	KENT DR	ZAK WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85705	0.6 to 8.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
85706	8.6 to 16.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
85745	18.7 to 40.5 feet	Key Note Segment		5 ft	109			
85695	30.3 to 31.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
85707	41.7 to 43.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
85696	43.6 to 44.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
85708	46.8 to 50.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
85746	51.9 to 72.2 feet	Key Note Segment		5 ft	102			
85709	76.3 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
85710	81.2 to 83.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
85711	86.3 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
85712	93.6 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85713	96.5 to 105.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
85714	106.3 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
85715	122.1 to 123.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
85747	124.8 to 145.3 feet	Key Note Segment		5 ft	103			
85716	146.6 to 155.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
85697	149.0 to 150.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
85748	155.7 to 176.6 feet	Key Note Segment		5 ft	105			
85717	177.7 to 191.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
85718	193.8 to 195.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
85719	200.7 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
85720	212.0 to 221.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
85721	223.7 to 228.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
85749	229.8 to 250.4 feet	Key Note Segment		5 ft	103			
85722	250.8 to 252.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
85723	255.5 to 258.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
85724	262.3 to 263.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161107	DIANE WAY	KENT DR	ZAK WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85750	263.6 to 284.2 feet	Key Note Segment		5 ft	103			
85725	284.2 to 285.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	6	SF	$40	$220
85726	289.2 to 297.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,680
85727	300.0 to 311.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
85728	313.8 to 317.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
85751	318.0 to 338.8 feet	Key Note Segment		5 ft	104			
85729	339.6 to 341.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
85730	343.3 to 344.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
85731	347.6 to 348.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
85732	350.9 to 362.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,020
85699	351.6 to 352.6 feet	Vertical Change	-.37"	5 ft	5	REF		
85733	362.8 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
85734	367.5 to 371.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
85752	371.9 to 392.6 feet	Key Note Segment		5 ft	104			
85735	394.3 to 396.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
85736	397.6 to 406.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
85737	413.8 to 415.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
85700	416.0 to 417.0 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
85738	421.0 to 422.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
85739	422.1 to 423.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
85753	425.5 to 446.3 feet	Key Note Segment		5 ft	104			
85701	443.7 to 444.7 feet	Vertical Change	2.13"	5 ft	5	REF		
85702	446.2 to 450.0 feet	Vertical Change	.38"	5 ft	19	REF		
85740	447.3 to 456.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	$5,340
85703	454.4 to 458.0 feet	Vertical Change	.33"	5 ft	18	REF		
85741	459.5 to 468.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	$5,400
85704	460.9 to 461.9 feet	Vertical Change	1.09"	5 ft	5	REF		
85742	475.4 to 479.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161107	DIANE WAY	KENT DR	ZAK WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85754	480.1 to 500.5 feet	Key Note Segment		5 ft	102			
85743	500.9 to 509.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
85744	509.8 to 517.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,500**

TOTAL COST FOR: S *side of* **DIANE WAY** *Starting at:* **KENT DR** **$118,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161112	DIANE WAY	ZAK WAY	KENT DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85763	0.6 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
85796	19.8 to 41.2 feet	Key Note Segment		5 ft	107			
85755	30.7 to 31.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
85764	46.4 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
85765	50.3 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
85797	69.1 to 89.2 feet	Key Note Segment		5 ft	101			
85756	79.3 to 80.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
85766	91.8 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
85767	96.7 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
85768	106.3 to 114.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
85769	114.7 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
85798	123.4 to 143.3 feet	Key Note Segment		5 ft	100			
85757	133.5 to 134.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
85770	144.6 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
85771	147.9 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
85772	151.1 to 156.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,060**
85799	156.5 to 178.9 feet	Key Note Segment		5 ft	112			
85758	157.5 to 158.5 feet	**Vertical Change**	.52"	5 ft	5	REF		
85759	167.6 to 168.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
85773	180.9 to 185.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
85774	185.8 to 191.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
85775	191.2 to 194.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
85776	197.3 to 207.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
85777	209.3 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
85778	217.8 to 228.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
85800	230.3 to 251.4 feet	Key Note Segment		5 ft	106			
85779	256.2 to 263.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
85806	259.0 to 260.3 feet		5.0-6.0%	5 ft	7			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161112	DIANE WAY	ZAK WAY	KENT DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85801	264.3 to 285.6 feet	Key Note Segment		5 ft	107			
85780	286.9 to 315.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
85781	319.4 to 330.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
85782	330.1 to 336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
85783	339.6 to 342.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
85802	343.2 to 364.8 feet	Key Note Segment		5 ft	108			
85784	367.9 to 371.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
85785	373.8 to 374.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85786	377.3 to 380.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
85787	380.8 to 386.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
85803	386.7 to 417.7 feet	Key Note Segment		5 ft	155			
85760	387.9 to 388.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
85804	426.2 to 446.9 feet	Key Note Segment		5 ft	104			
85761	446.5 to 447.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
85788	448.3 to 449.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
85789	450.6 to 467.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
85790	467.5 to 473.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
85791	474.1 to 478.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
85792	478.8 to 484.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
85805	484.3 to 505.5 feet	Key Note Segment		5 ft	106			
85762	485.3 to 486.3 feet	**Vertical Change**	1.31"	5 ft	5	REF		
85793	506.0 to 508.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$460**
85794	512.6 to 515.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
85795	515.3 to 519.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: N *side of* **DIANE WAY** *Starting at:* **ZAK WAY** **$131,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108120948	DOME AVE	BRIDGE WAY	MARIPOSA ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59580	0.1 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
59581	4.7 to 16.8 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	61	SF	$120	**$7,260**
59565	19.8 to 20.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
59582	20.3 to 22.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
59583	28.1 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
59609	44.1 to 73.4 feet	Key Note Segment		5 ft	147			
59566	58.3 to 59.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
59584	73.7 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
59585	74.8 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
59610	80.7 to 100.0 feet	Key Note Segment		5 ft	97			
59567	90.9 to 91.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
59568	100.4 to 101.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59586	101.2 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,720**
59587	123.8 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
59569	125.4 to 126.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59588	129.3 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,800**
59570	135.0 to 136.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
59571	145.3 to 146.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
59611	157.3 to 176.2 feet	Key Note Segment		5 ft	94			
59572	176.2 to 177.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
59589	177.7 to 179.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
59590	180.6 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
59612	182.6 to 202.4 feet	Key Note Segment		5 ft	99			
59573	183.8 to 184.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
59591	204.7 to 205.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
59592	205.9 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
59593	211.8 to 214.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
59574	211.9 to 212.9 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108120948	DOME AVE	BRIDGE WAY	MARIPOSA ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59594	219.9 to 228.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
59595	228.3 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
59596	231.8 to 239.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
59597	240.1 to 241.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
59598	246.8 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
59613	254.8 to 275.3 feet	Key Note Segment		5 ft	103			
59599	276.8 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59614	281.3 to 309.6 feet	Key Note Segment		5 ft	142			
59575	282.2 to 283.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
59600	310.1 to 324.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	73	SF	$40	**$2,940**
59576	318.5 to 319.5 feet	**Vertical Change**	-.41"	5 ft	5	REF		
59601	326.3 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
59602	336.9 to 351.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
59615	351.8 to 372.0 feet	Key Note Segment		5 ft	101			
59603	373.1 to 378.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
59604	379.6 to 381.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
59605	385.3 to 386.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
59616	387.4 to 407.2 feet	Key Note Segment		5 ft	99			
59577	388.6 to 389.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
59578	407.0 to 408.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
59606	408.3 to 417.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
59607	418.5 to 424.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
59608	426.0 to 428.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
59579	426.1 to 427.1 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **DOME AVE** *Starting at:* **BRIDGE WAY** **$117,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121030	DOME AVE	MARIPOSA ST	MONARCH RD	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59989	0.8 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
59987	3.0 to 4.0 feet	**Vertical Change**	-.68"	5 ft	5	REF		
59990	3.7 to 15.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
59991	16.2 to 22.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
59992	22.9 to 29.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
59993	30.1 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
59994	38.7 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,500**
59995	46.6 to 63.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
59996	63.7 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
59988	64.3 to 65.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59997	70.5 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
59998	72.6 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
59999	99.7 to 101.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
60000	103.4 to 123.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
60001	127.4 to 138.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
60002	138.1 to 143.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: S *side of* **DOME AVE** *Starting at:* **MARIPOSA ST** **$76,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121044	DOME AVE	MONARCH RD	BRIDGE WAY	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60108	0.1 to 35.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	175	SF	$120	**$21,000**
60105	1.2 to 2.2 feet	**Vertical Change**	-.38"	5 ft	5	REF		
60106	13.9 to 14.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
60109	35.1 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
60107	35.4 to 36.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
60110	61.8 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
60111	70.3 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
60112	86.4 to 129.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	216	SF	$120	**$25,920**
60113	130.8 to 140.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,640**
60114	142.6 to 145.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: S *side of* **DOME AVE** *Starting at:* **MONARCH RD** **$79,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071506	DOMINGUEZ DR	ADANAC WAY	SANARITA WY	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124507	0.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
124508	3.7 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
124505	9.2 to 10.2 feet	**Vertical Change**	.47"	5 ft	5	REF		
124506	34.5 to 35.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
124509	36.1 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
124510	52.0 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
124511	73.6 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
124512	83.2 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
124513	103.5 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$22,980**
124514	144.8 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
124515	161.3 to 167.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
124516	167.0 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: W *side of* **DOMINGUEZ DR** *Starting at:* **ADANAC WAY** **$80,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071501	DOMINGUEZ DR	LACRETA AVE	SANARITA WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124488	0.1 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124489	4.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
124481	6.7 to 7.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
124482	14.4 to 15.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
124490	28.8 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
124491	36.2 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
124492	53.9 to 63.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
124493	63.6 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
124494	74.2 to 128.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	273	SF	$120	**$32,760**
124483	97.6 to 98.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
124484	117.3 to 118.3 feet	**Vertical Change**	1.85"	5 ft	5	REF		
124485	122.6 to 123.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
124495	128.9 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$20,040**
124486	160.8 to 161.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
124496	163.4 to 167.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
124487	163.5 to 164.5 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DOMINGUEZ DR** *Starting at:* **LACRETA AVE** **$94,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071509	DOMINGUEZ DR	SANARITA WY	LACRETA AVE	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124518	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
124519	4.9 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
124517	9.1 to 10.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
124520	14.1 to 30.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
124521	30.9 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
124522	45.3 to 47.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
124523	48.8 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
124524	53.9 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
124525	72.0 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
124526	75.9 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
124527	95.8 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
124528	106.8 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
124529	113.8 to 123.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
124530	124.7 to 147.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,500**
124531	150.9 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
124532	161.4 to 163.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
124533	164.2 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: E *side of* **DOMINGUEZ DR** *Starting at:* **SANARITA WY** **$82,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071503	DOMINGUEZ DR	SANARITA WY	E KENNEDY ST	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124500	0.0 to 29.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	149	SF	$120	**$17,820**
124497	14.6 to 15.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
124501	30.6 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	466	SF	$120	**$55,920**
124498	74.3 to 75.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
124499	123.0 to 124.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
124502	125.9 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
124503	130.5 to 131.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
124504	131.8 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	194	SF	$120	**$23,280**

TOTAL COST FOR: W *side of* **DOMINGUEZ DR** *Starting at:* **SANARITA WY** **$99,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091455	DON MIGUEL ST	14TH ST	OLIVE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48436	2.4 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
48424	13.6 to 14.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
48437	17.0 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
48457	21.3 to 41.3 feet	Key Note Segment		5 ft	100			
48425	23.4 to 24.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
48438	42.2 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
48439	48.2 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
48440	56.0 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
48426	56.5 to 57.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
48458	64.0 to 85.1 feet	Key Note Segment		5 ft	106			
48427	65.1 to 66.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48459	88.7 to 109.7 feet	Key Note Segment		5 ft	105			
48428	107.6 to 108.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
48441	109.8 to 110.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
48442	111.2 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
48443	123.5 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
48444	139.4 to 145.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,780**
48445	145.7 to 151.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
48460	151.4 to 170.7 feet	Key Note Segment		5 ft	97			
48429	170.4 to 171.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
48446	170.8 to 171.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
48447	171.8 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
48461	175.5 to 195.2 feet	Key Note Segment		5 ft	99			
48448	196.8 to 214.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
48449	219.5 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48450	225.1 to 236.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
48430	228.4 to 229.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
48462	236.2 to 256.1 feet	Key Note Segment		5 ft	100			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091455	DON MIGUEL ST	14TH ST	OLIVE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48463	258.2 to 274.8 feet	Key Note Segment		5 ft	83			
48431	259.0 to 260.0 feet	Vertical Change	.39"	5 ft	5	REF		
48451	276.1 to 288.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
48432	280.6 to 281.6 feet	Vertical Change	.28"	5 ft	5	REF		
48464	289.8 to 310.4 feet	Key Note Segment		5 ft	103			
48433	318.6 to 319.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
48465	319.0 to 335.4 feet	Key Note Segment		5 ft	82			
48434	338.6 to 339.6 feet	Vertical Change	-.51"	5 ft	5	SF	$75	**$375**
48452	342.2 to 356.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
48435	350.1 to 351.1 feet	Vertical Change	-.63"	5 ft	5	REF		
48453	359.7 to 366.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
48454	366.9 to 368.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48455	371.3 to 372.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
48456	373.3 to 381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: SW *side of* **DON MIGUEL ST** *Starting at:* **14TH ST** **$80,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2201111423	DOUBLE TREE CT	GAMAY AVE	GAMAY AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92479	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
92480	2.7 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
92481	7.6 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
92498	19.3 to 37.3 feet	Key Note Segment		5 ft	90			
92482	39.3 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92499	45.7 to 64.2 feet	Key Note Segment		5 ft	93			
92471	54.3 to 55.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
92483	65.7 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
92472	66.7 to 67.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92484	68.8 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
92473	78.1 to 79.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
92485	82.6 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
92500	94.0 to 117.0 feet	Key Note Segment		5 ft	115			
92486	117.4 to 118.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
92487	129.8 to 132.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
92488	132.3 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92489	160.6 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
92501	164.2 to 185.1 feet	Key Note Segment		5 ft	105			
92475	174.8 to 175.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
92490	185.4 to 187.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
92502	192.1 to 213.9 feet	Key Note Segment		5 ft	109			
92491	231.0 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92492	250.8 to 253.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
92503	260.2 to 284.1 feet	Key Note Segment		5 ft	120			
92476	267.4 to 268.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
92493	285.3 to 287.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
92494	290.2 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
92495	303.7 to 313.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2201111423	DOUBLE TREE CT	GAMAY AVE	GAMAY AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92504	314.0 to 333.8 feet	Key Note Segment		5 ft	99			
92477	333.9 to 334.9 feet	**Vertical Change**	.62"	5 ft	5	REF		
92505	341.2 to 361.2 feet	Key Note Segment		5 ft	100			
92496	362.3 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92497	365.5 to 381.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**

TOTAL COST FOR: W/S/E *side of* **DOUBLE TREE CT** *Starting at:* **GAMAY AVE** **$53,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151350	DOUBLE TREE WAY	236 DOUBLETREE WAY	REN WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82768	0.5 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
82769	7.8 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
82770	27.4 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
82781	31.6 to 52.1 feet	Key Note Segment		5 ft	103			
82760	42.4 to 43.4 feet	**Vertical Change**	1.71"	5 ft	5	REF		
82771	55.3 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82782	58.2 to 78.9 feet	Key Note Segment		5 ft	104			
82772	81.3 to 90.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
82773	91.1 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
82774	103.2 to 106.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
82761	108.3 to 109.3 feet	**Vertical Change**	-.76"	5 ft	5	REF		
82775	108.7 to 110.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
82776	111.1 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82762	113.7 to 114.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
82777	114.2 to 141.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	138	SF	$120	**$16,560**
82785	129.3 to 130.7 feet		6.0-7.0%	5 ft	7			
82783	141.9 to 162.8 feet	Key Note Segment		5 ft	105			
82764	142.8 to 143.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
82765	154.4 to 155.4 feet	**Vertical Change**	2.21"	5 ft	5	REF		
82778	164.8 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
82784	169.3 to 188.4 feet	Key Note Segment		5 ft	96			
82766	169.4 to 170.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
82779	191.8 to 211.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
82767	207.4 to 208.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
82780	213.2 to 216.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **DOUBLE TREE WAY** *Starting at:* **236 DOUBLETREE WAY** **$59,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109161104	DOUBLE TREE WAY	BOULDER AVE	PAINTBRUSH DR	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70582	0.8 to 8.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
70583	8.6 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
70584	32.1 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
70585	43.7 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
70581	54.6 to 55.6 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
70586	72.1 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
70587	96.1 to 101.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
70588	101.4 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70589	116.7 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
70590	137.6 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
70591	151.1 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: NE *side of* **DOUBLE TREE WAY** *Starting at:* **BOULDER AVE** **$31,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161500	DOUBLE TREE WAY	BOULDER AVE	CASTLE WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87425	0.0 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
87426	6.4 to 9.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
87427	12.0 to 18.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
87428	18.5 to 19.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87429	23.2 to 30.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
87430	30.6 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
87431	44.6 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
87432	50.2 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87458	52.1 to 71.4 feet	Key Note Segment		5 ft	97			
87433	77.9 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
87418	79.0 to 80.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87459	85.1 to 97.3 feet	Key Note Segment		5 ft	61			
87434	102.1 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
87435	110.8 to 117.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
87436	119.4 to 121.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
87437	121.6 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
87438	127.1 to 130.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
87439	130.8 to 138.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,500**
87440	138.4 to 147.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
87441	148.4 to 149.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
87442	150.4 to 151.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87443	165.6 to 171.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
87444	171.0 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
87419	182.5 to 183.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
87445	183.2 to 188.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
87420	191.8 to 192.8 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
87446	195.8 to 197.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
87447	198.3 to 203.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161500	DOUBLE TREE WAY	BOULDER AVE	CASTLE WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87421	199.5 to 200.5 feet	Vertical Change	-.34"	5 ft	5	REF		
87448	205.5 to 207.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
87422	207.6 to 208.6 feet	Vertical Change	-1.81"	5 ft	5	REF		
87449	211.0 to 215.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
87423	212.0 to 213.0 feet	Vertical Change	.5"	5 ft	5	REF		
87450	215.5 to 216.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
87451	216.8 to 220.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
87452	221.3 to 229.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
87453	253.9 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
87454	261.0 to 276.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	77	SF	$120	**$9,180**
87455	276.3 to 278.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
87456	278.8 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87457	299.0 to 307.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: W *side of* **DOUBLE TREE WAY** *Starting at:* **BOULDER AVE** **$102,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161502	DOUBLE TREE WAY	CASTLE WAY	SUNSET AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87464	3.9 to 5.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
87465	8.0 to 9.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87466	9.8 to 11.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
87467	11.1 to 12.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
87468	12.9 to 18.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
87469	19.3 to 22.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
87470	25.2 to 28.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	16	SF	$120	**$1,860**
87471	29.3 to 35.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
87472	35.3 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
87473	37.8 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87460	56.9 to 57.9 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
87474	61.3 to 84.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
87461	78.9 to 79.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
87475	85.7 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87476	98.7 to 134.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**
87462	98.9 to 99.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
87463	119.8 to 120.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
87477	131.1 to 132.6 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **DOUBLE TREE WAY** *Starting at:* **CASTLE WAY** **$55,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170846	DOUBLE TREE WAY	LIBERTY LN	WESTBERRY BVD	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71490	0.4 to 6.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
71491	7.9 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
71492	28.8 to 37.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
71493	40.9 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
71511	63.9 to 90.2 feet	Key Note Segment		5 ft	132			
71494	92.4 to 97.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
71495	98.8 to 120.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**
71496	121.6 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
71497	128.0 to 147.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
71512	147.4 to 175.8 feet	Key Note Segment		5 ft	142			
71482	164.3 to 165.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
71498	179.8 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
71513	190.0 to 217.5 feet	Key Note Segment		5 ft	138			
71483	215.4 to 216.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
71499	218.7 to 242.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
71500	243.0 to 245.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
71514	247.3 to 278.2 feet	Key Note Segment		5 ft	155			
71501	279.1 to 309.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
71484	282.7 to 283.7 feet	**Vertical Change**	.7"	5 ft	5	REF		
71485	285.2 to 286.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
71502	309.7 to 316.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
71515	316.2 to 347.3 feet	Key Note Segment		5 ft	156			
71503	349.3 to 367.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
71504	367.9 to 375.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
71516	377.3 to 404.8 feet	Key Note Segment		5 ft	138			
71486	380.4 to 381.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
71505	409.5 to 419.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
71506	419.9 to 435.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170846	DOUBLE TREE WAY	LIBERTY LN	WESTBERRY BVD	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71487	430.8 to 431.8 feet	Vertical Change	.35"	5 ft	5	REF		
71507	437.3 to 438.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
71508	438.9 to 440.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
71517	442.0 to 471.6 feet	Key Note Segment		5 ft	148			
71488	470.4 to 471.4 feet	Vertical Change	-.28"	5 ft	5	REF		
71509	477.9 to 486.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
71489	479.4 to 480.4 feet	Vertical Change	.26"	5 ft	5	REF		
71510	487.0 to 496.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: S *side of* **DOUBLE TREE WAY** *Starting at:* **LIBERTY LN** **$150,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161108	DOUBLE TREE WAY	PAINTBRUSH DR	SUBURBAN AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70592	1.4 to 4.3 feet	Vertical Change	.31"	5 ft	15	LF	$75	$1,088
70599	5.1 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,860
70622	12.6 to 34.2 feet	Key Note Segment		5 ft	108			
70600	36.5 to 49.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	$7,620
70601	49.2 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
70623	52.3 to 75.8 feet	Key Note Segment		5 ft	118			
70602	80.3 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	$16,200
70624	108.5 to 130.9 feet	Key Note Segment		5 ft	112			
70593	120.7 to 121.7 feet	Vertical Change	.27"	5 ft	5	REF		
70603	133.1 to 134.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
70604	148.0 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	209	SF	$120	$25,080
70625	189.8 to 205.2 feet	Key Note Segment		5 ft	77			
70626	234.2 to 255.5 feet	Key Note Segment		5 ft	107			
70594	243.8 to 244.8 feet	Vertical Change	.46"	5 ft	5	REF		
70605	257.9 to 267.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,580
70627	267.4 to 284.8 feet	Key Note Segment		5 ft	87			
70606	284.8 to 288.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	17	SF	$40	$660
70607	292.3 to 293.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
70595	296.8 to 297.8 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
70608	306.8 to 313.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
70609	315.1 to 323.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
70610	327.3 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
70611	340.7 to 341.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
70612	344.2 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
70628	352.8 to 367.3 feet	Key Note Segment		5 ft	73			
70596	354.3 to 355.3 feet	Vertical Change	-.26"	5 ft	5	REF		
70613	370.1 to 379.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
70597	374.4 to 375.4 feet	Vertical Change	-.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161108	DOUBLE TREE WAY	PAINTBRUSH DR	SUBURBAN AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70614	381.8 to 384.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
70615	387.3 to 388.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
70616	389.9 to 394.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
70598	395.6 to 396.6 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
70617	398.8 to 400.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
70629	401.8 to 422.7 feet	Key Note Segment		5 ft	105			
70618	424.8 to 431.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
70619	433.8 to 460.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$15,900**
70620	466.8 to 480.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
70621	481.2 to 488.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: N *side of* **DOUBLE TREE WAY** *Starting at:* **PAINTBRUSH DR** **$127,777.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151352	DOUBLE TREE WAY	REN WAY	WINTER WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82791	2.6 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
82792	7.5 to 15.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
82793	15.4 to 16.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
82794	19.2 to 30.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
82786	27.7 to 28.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
82795	30.0 to 33.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
82796	35.1 to 36.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
82797	38.3 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
82787	48.1 to 49.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
82798	54.5 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
82799	57.9 to 62.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
82800	62.4 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82801	66.8 to 70.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
82802	72.4 to 76.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
82803	76.1 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
82804	80.3 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
82788	81.2 to 82.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
82789	95.6 to 96.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
82805	100.3 to 105.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
82790	102.9 to 103.9 feet	**Vertical Change**	-.8"	5 ft	5	REF		
82806	106.2 to 107.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
82807	108.3 to 111.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
82808	112.7 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
82809	124.3 to 143.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
82810	143.8 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **REN WAY** **$69,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161452	DOUBLE TREE WAY	ROSEWOOD CR	ROSEWOOD CR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87375	3.2 to 4.2 feet	Vertical Change	1.19"	5 ft	5	SF	$75	**$375**
87390	11.1 to 12.2 feet		5.0-6.0%	5 ft	6			
87376	11.6 to 12.6 feet	Vertical Change	-.53"	5 ft	5	SF	$75	**$375**
87381	15.4 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
87382	17.8 to 35.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
87383	36.0 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87377	42.7 to 43.7 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**
87384	45.8 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87378	51.4 to 52.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
87385	55.6 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87379	59.3 to 60.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
87386	62.4 to 64.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
87387	65.3 to 76.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
87380	66.6 to 67.6 feet	Vertical Change	-.27"	5 ft	5	REF		
87388	79.3 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
87389	81.6 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **ROSEWOOD CR** **$27,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161453	DOUBLE TREE WAY	ROSEWOOD CR	ROSEWOOD CR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87392	0.9 to 10.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
87391	3.6 to 4.6 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **ROSEWOOD CR** **$5,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161456	DOUBLE TREE WAY	ROSEWOOD CR	BOULDER AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87402	3.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
87403	9.2 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
87404	14.9 to 29.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
87393	22.0 to 23.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
87394	26.9 to 27.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
87405	30.3 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,500**
87406	38.0 to 45.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
87407	47.8 to 53.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
87395	55.5 to 56.5 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
87396	67.5 to 68.5 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
87408	74.3 to 78.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
87409	79.7 to 87.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,560**
87410	87.3 to 100.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	67	SF	$120	**$7,980**
87397	103.9 to 104.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
87398	114.7 to 115.7 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
87399	121.3 to 122.3 feet	**Vertical Change**	-.8"	5 ft	5	SF	$75	**$375**
87411	132.5 to 137.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
87412	138.0 to 144.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
87413	145.1 to 149.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,640**
87414	156.1 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87415	162.7 to 168.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
87416	174.8 to 216.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	208	SF	$120	**$24,900**
87400	195.9 to 196.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87401	208.7 to 209.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
87417	216.8 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **ROSEWOOD CR** **$82,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161034	DOUBLE TREE WAY	SUBURBAN AVE	WESTBERRY BVD	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70234	1.3 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
70235	26.3 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
70236	43.6 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
70237	54.1 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
70238	59.6 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
70232	72.7 to 73.7 feet	**Vertical Change**	.97"	5 ft	5	REF		
70239	72.8 to 78.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,180**
70233	76.3 to 77.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **DOUBLE TREE WAY** *Starting at:* **SUBURBAN AVE** **$39,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109161102	DOUBLE TREE WAY	SUBURBAN AVE	BOULDER AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70537	0.0 to 2.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
70538	5.1 to 6.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
70539	10.2 to 17.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
70540	17.7 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
70572	19.4 to 42.1 feet	Key Note Segment		5 ft	114			
70514	32.0 to 33.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
70541	44.8 to 46.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
70542	50.2 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
70573	57.3 to 79.9 feet	Key Note Segment		5 ft	113			
70543	82.3 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
70544	90.4 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
70516	121.5 to 122.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
70545	121.5 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
70517	132.8 to 133.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
70546	134.5 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
70518	139.0 to 140.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
70574	146.4 to 160.1 feet	Key Note Segment		5 ft	69			
70519	162.9 to 163.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
70547	178.5 to 185.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
70548	187.7 to 199.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
70575	199.9 to 221.2 feet	Key Note Segment		5 ft	107			
70549	222.7 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
70521	223.4 to 224.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
70550	231.3 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
70522	238.8 to 239.8 feet	**Vertical Change**	.85"	5 ft	5	SF	$75	**$375**
70551	241.8 to 247.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
70576	258.1 to 286.2 feet	Key Note Segment		5 ft	140			
70523	283.7 to 284.7 feet	**Vertical Change**	-.44"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109161102	DOUBLE TREE WAY	SUBURBAN AVE	BOULDER AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70552	293.4 to 342.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	244	SF	$120	**$29,220**
70524	320.9 to 321.9 feet	**Vertical Change**	3.25"	5 ft	5	REF		
70525	324.5 to 325.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70526	333.7 to 334.7 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
70577	343.8 to 366.4 feet	Key Note Segment		5 ft	113			
70527	346.3 to 347.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
70553	366.4 to 369.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
70528	371.1 to 372.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
70554	373.0 to 379.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
70555	395.6 to 405.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
70578	405.7 to 420.9 feet	Key Note Segment		5 ft	76			
70556	421.8 to 423.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
70557	431.7 to 438.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
70529	436.8 to 437.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
70558	439.3 to 445.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
70559	445.3 to 456.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
70560	456.8 to 460.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
70530	457.4 to 458.4 feet	**Vertical Change**	-.46"	5 ft	5	REF		
70561	460.7 to 473.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
70562	474.9 to 495.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,120**
70563	495.6 to 500.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
70579	500.9 to 525.6 feet	Key Note Segment		5 ft	124			
70564	525.7 to 538.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,600**
70565	541.6 to 543.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
70531	548.7 to 549.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
70566	548.9 to 556.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
70580	557.2 to 576.5 feet	Key Note Segment		5 ft	96			
70532	565.0 to 566.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109161102	DOUBLE TREE WAY	SUBURBAN AVE	BOULDER AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70567	578.1 to 589.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$7,020**
70568	589.8 to 596.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
70533	595.8 to 596.8 feet	**Vertical Change**	.79"	5 ft	5	REF		
70569	603.3 to 607.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
70534	603.8 to 604.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
70570	607.0 to 628.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
70571	628.0 to 643.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
70535	628.3 to 629.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
70536	644.3 to 645.3 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **DOUBLE TREE WAY** *Starting at:* **SUBURBAN AVE** **$181,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151347	DOUBLE TREE WAY	SUMMER LN	264 DOUBLE TREE WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82747	0.0 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
82748	6.8 to 15.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
82743	16.0 to 17.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
82749	17.7 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
82757	25.2 to 46.0 feet	Key Note Segment		5 ft	104			
82750	48.0 to 64.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
82751	65.3 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
82752	72.0 to 76.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
82753	78.3 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
82744	80.8 to 81.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
82758	80.8 to 100.5 feet	Key Note Segment		5 ft	99			
82745	101.4 to 102.4 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
82746	105.0 to 106.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
82754	105.3 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
82759	108.2 to 128.9 feet	Key Note Segment		5 ft	104			
82755	131.8 to 133.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
82756	136.5 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: W *side of* **DOUBLE TREE WAY** *Starting at:* **SUMMER LN** **$33,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161450	DOUBLE TREE WAY	SUNSET AVE	ROSEWOOD CR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87367	1.8 to 2.8 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
87370	3.7 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
87371	15.2 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87372	24.8 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87368	29.1 to 30.1 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
87373	32.6 to 38.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
87369	41.1 to 42.1 feet	Vertical Change	.27"	5 ft	5	REF		
87374	41.5 to 73.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **SUNSET AVE** **$30,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170817	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71135	0.0 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
71136	8.0 to 17.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
71193	17.3 to 44.9 feet	Key Note Segment		5 ft	138			
71137	48.8 to 72.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
71138	75.2 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
71194	78.3 to 105.0 feet	Key Note Segment		5 ft	134			
71109	96.0 to 97.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
71139	105.6 to 106.7 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	6	SF	$120	**$660**
71140	114.3 to 117.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
71141	120.4 to 133.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
71111	133.0 to 134.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
71195	133.1 to 160.2 feet	Key Note Segment		5 ft	135			
71112	142.1 to 143.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
71113	149.8 to 150.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
71142	165.7 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
71143	186.3 to 193.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
71196	195.9 to 227.0 feet	Key Note Segment		5 ft	156			
71114	213.4 to 214.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71115	227.1 to 228.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
71144	229.7 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
71145	234.5 to 236.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
71146	240.6 to 255.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
71147	255.8 to 262.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
71197	266.8 to 297.5 feet	Key Note Segment		5 ft	154			
71116	270.0 to 271.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
71117	300.7 to 301.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
71148	302.0 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
71149	311.3 to 321.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170817	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71150	327.2 to 337.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
71118	341.6 to 342.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
71198	344.1 to 375.8 feet	Key Note Segment		5 ft	159			
71119	353.7 to 354.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
71120	363.7 to 364.7 feet	**Vertical Change**	.45"	5 ft	5	REF		
71121	373.2 to 374.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
71151	378.3 to 379.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
71152	387.8 to 403.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
71122	392.7 to 393.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
71153	404.3 to 416.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
71154	418.7 to 422.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
71199	423.4 to 453.9 feet	Key Note Segment		5 ft	153			
71155	456.4 to 468.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,960**
71156	468.0 to 481.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
71157	486.4 to 490.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
71200	492.7 to 523.1 feet	Key Note Segment		5 ft	152			
71123	493.5 to 494.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
71158	528.1 to 561.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,160**
71201	562.9 to 591.8 feet	Key Note Segment		5 ft	144			
71125	589.2 to 590.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
71159	593.5 to 600.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
71160	608.8 to 612.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71161	617.3 to 625.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
71202	627.5 to 654.3 feet	Key Note Segment		5 ft	134			
71162	659.7 to 700.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	203	SF	$120	**$24,360**
71126	675.4 to 676.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
71203	701.6 to 728.9 feet	Key Note Segment		5 ft	137			
71127	728.3 to 729.3 feet	**Vertical Change**	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170817	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71163	731.7 to 738.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
71164	738.9 to 762.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
71165	762.6 to 770.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
71204	770.3 to 798.1 feet	Key Note Segment		5 ft	139			
71166	799.3 to 821.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,440**
71128	800.1 to 801.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
71167	823.2 to 838.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
71205	838.8 to 866.3 feet	Key Note Segment		5 ft	138			
71129	856.0 to 857.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
71168	868.7 to 871.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
71169	874.3 to 875.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
71170	875.8 to 881.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71206	881.3 to 907.3 feet	Key Note Segment		5 ft	130			
71130	890.8 to 891.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
71131	899.1 to 900.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
71132	910.3 to 911.3 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
71171	913.3 to 936.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
71133	923.0 to 924.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
71172	941.2 to 946.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
71173	948.9 to 956.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
71174	959.7 to 970.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
71207	970.5 to 1000.3 feet	Key Note Segment		5 ft	149			
71134	999.9 to 1000.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
71175	1004.0 to 1009.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
71208	1010.3 to 1037.8 feet	Key Note Segment		5 ft	138			
71176	1041.3 to 1042.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
71177	1042.9 to 1048.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
71178	1051.0 to 1056.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170817	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71179	1056.8 to 1061.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71180	1061.9 to 1067.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
71181	1070.3 to 1072.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
71182	1072.4 to 1081.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
71183	1083.6 to 1097.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
71184	1097.6 to 1104.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
71185	1105.9 to 1109.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
71186	1111.9 to 1117.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
71209	1118.0 to 1146.7 feet	Key Note Segment		5 ft	144			
71187	1157.2 to 1160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
71188	1164.3 to 1167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
71189	1172.8 to 1182.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
71190	1183.7 to 1188.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
71191	1188.7 to 1192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71192	1195.0 to 1212.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**

TOTAL COST FOR: N *side of* **DOUBLE TREE WAY** *Starting at:* **TRABON WAY** **$319,845.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170830	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71317	3.3 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
71360	11.4 to 31.4 feet	Key Note Segment		5 ft	100			
71318	32.0 to 33.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
71319	33.5 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
71305	37.5 to 38.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71320	41.3 to 47.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
71321	55.8 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
71322	77.6 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71306	82.9 to 83.9 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
71361	85.6 to 112.8 feet	Key Note Segment		5 ft	136			
71323	114.8 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
71324	122.6 to 137.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,060**
71325	144.5 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
71326	156.8 to 158.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
71327	161.1 to 165.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
71328	166.5 to 168.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
71329	170.9 to 172.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
71330	176.0 to 179.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
71307	180.9 to 181.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
71362	181.0 to 215.0 feet	Key Note Segment		5 ft	170			
71308	204.9 to 205.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
71331	215.3 to 216.4 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	6	SF	$40	**$220**
71332	219.8 to 221.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
71333	221.6 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
71309	225.9 to 226.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71334	226.3 to 252.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,600**
71335	252.5 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71363	256.3 to 285.0 feet	Key Note Segment		5 ft	144			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170830	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71336	288.7 to 291.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
71337	291.6 to 297.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
71364	298.6 to 329.4 feet	Key Note Segment		5 ft	154			
71338	330.6 to 331.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
71339	332.3 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
71310	334.6 to 335.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
71340	340.6 to 344.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
71341	344.5 to 355.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
71311	348.3 to 349.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
71342	365.8 to 399.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
71365	399.6 to 426.2 feet	Key Note Segment		5 ft	133			
71343	427.9 to 429.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
71344	429.6 to 436.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
71345	451.3 to 455.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71346	456.5 to 466.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
71347	466.2 to 468.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
71348	469.4 to 472.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
71349	505.0 to 508.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
71350	508.5 to 536.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
71351	536.5 to 542.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
71366	545.0 to 574.1 feet	Key Note Segment		5 ft	146			
71312	550.2 to 551.2 feet	**Vertical Change**	3.05"	5 ft	5	REF		
71313	564.3 to 565.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
71352	575.0 to 577.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
71353	586.9 to 613.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,900**
71354	613.7 to 630.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
71367	630.1 to 653.0 feet	Key Note Segment		5 ft	115			
71314	630.8 to 631.8 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170830	DOUBLE TREE WAY	TRABON WAY	SUMMER SET LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71315	655.1 to 656.1 feet	Vertical Change	3.34"	5 ft	5	REF		
71355	655.6 to 667.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
71356	667.9 to 686.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
71368	688.3 to 714.1 feet	Key Note Segment		5 ft	129			
71316	689.9 to 690.9 feet	Vertical Change	-.27"	5 ft	5	REF		
71357	717.4 to 721.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
71369	722.8 to 748.1 feet	Key Note Segment		5 ft	127			
71358	751.1 to 772.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
71359	773.3 to 779.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
71370	778.2 to 780.0 feet		6.0-7.0%	5 ft	9			

TOTAL COST FOR: N *side of* **DOUBLE TREE WAY** *Starting at:* **TRABON WAY** **$204,325.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170809	DOUBLE TREE WAY	WESTBERRY BVD	TRABON WAY	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71101	1.8 to 5.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
71099	3.8 to 4.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
71102	5.8 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
71100	9.4 to 10.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
71103	22.4 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
71104	27.8 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
71105	54.8 to 63.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
71106	65.6 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
71107	67.3 to 102.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,360**
71108	102.9 to 104.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **DOUBLE TREE WAY** *Starting at:* **WESTBERRY BVD** **$55,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161035	DOUBLE TREE WAY	WESTBERRY BVD	SUBURBAN AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70240	0.5 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
70241	4.1 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
70242	31.4 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
70243	64.8 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**

TOTAL COST FOR: S *side of* **DOUBLE TREE WAY** *Starting at:* **WESTBERRY BVD** **$40,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151330	DOUBLE TREE WAY	WINTER WAY	SUMMER LN	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82578	0.5 to 2.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
82579	6.3 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
82571	10.8 to 11.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
82580	16.6 to 18.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
82581	19.6 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
82582	29.8 to 38.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
82583	41.7 to 42.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
82584	43.8 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82585	46.5 to 47.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
82586	48.9 to 49.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
82587	52.0 to 67.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	75	SF	$120	**$9,000**
82588	70.1 to 76.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
82589	78.7 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
82572	79.2 to 80.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
82573	82.5 to 83.5 feet	**Vertical Change**	.64"	5 ft	5	REF		
82590	82.6 to 84.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
82591	85.7 to 100.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,760**
82574	99.0 to 100.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
82592	101.8 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
82575	110.9 to 111.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
82593	114.7 to 125.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
82576	123.6 to 124.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
82594	125.8 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
82595	139.7 to 143.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
82596	146.0 to 150.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
82577	148.5 to 149.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
82597	153.0 to 159.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**

TOTAL COST FOR: E *side of* **DOUBLE TREE WAY** *Starting at:* **WINTER WAY** **$67,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131136	DRAKE ST	NEPLUS WY	PADRE ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62108	0.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
62102	0.2 to 1.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
62109	2.4 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
62119	16.7 to 40.6 feet	Key Note Segment		5 ft	120			
62110	42.0 to 45.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
62103	44.9 to 45.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
62111	45.8 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
62112	65.7 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
62113	75.5 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
62104	91.1 to 92.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
62105	103.4 to 104.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
62114	106.1 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
62115	109.9 to 111.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
62116	112.6 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
62106	117.8 to 118.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
62117	119.0 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
62107	130.0 to 131.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
62118	139.8 to 142.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: E *side of* **DRAKE ST** *Starting at:* **NEPLUS WY** **$45,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131154	DRAKE ST	PADRE ST	SAURET ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62245	0.1 to 1.1 feet	Vertical Change	.26"	5 ft	5	REF		
62263	0.9 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
62264	3.5 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
62246	11.4 to 12.4 feet	Vertical Change	.33"	5 ft	5	REF		
62282	18.8 to 41.5 feet	Key Note Segment		5 ft	114			
62247	24.0 to 25.0 feet	Vertical Change	.28"	5 ft	5	REF		
62283	46.2 to 69.1 feet	Key Note Segment		5 ft	114			
62265	69.8 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
62266	95.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
62284	106.3 to 129.6 feet	Key Note Segment		5 ft	117			
62248	107.1 to 108.1 feet	Vertical Change	-.29"	5 ft	5	REF		
62249	109.7 to 110.7 feet	Vertical Change	.28"	5 ft	5	REF		
62267	129.6 to 131.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$420
62285	133.8 to 157.0 feet	Key Note Segment		5 ft	116			
62250	145.0 to 146.0 feet	Vertical Change	.37"	5 ft	5	REF		
62251	152.8 to 153.8 feet	Vertical Change	-.31"	5 ft	5	REF		
62268	157.0 to 165.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	$1,600
62252	157.8 to 158.8 feet	Vertical Change	.29"	5 ft	5	REF		
62253	168.5 to 169.5 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
62269	177.2 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
62270	180.8 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
62254	184.3 to 185.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
62271	186.1 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
62286	195.0 to 214.2 feet	Key Note Segment		5 ft	96			
62272	214.2 to 215.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$220
62255	214.7 to 215.7 feet	Vertical Change	.28"	5 ft	5	REF		
62273	218.9 to 220.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
62287	221.3 to 245.0 feet	Key Note Segment		5 ft	119			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131154	DRAKE ST	PADRE ST	SAURET ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62256	232.7 to 233.7 feet	Vertical Change	.34"	5 ft	5	REF		
62257	240.5 to 241.5 feet	Vertical Change	-.52"	5 ft	5	REF		
62274	245.3 to 250.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	26	SF	$40	**$1,020**
62258	245.6 to 246.6 feet	Vertical Change	.3"	5 ft	5	REF		
62275	250.7 to 255.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62276	257.4 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
62259	258.6 to 259.6 feet	Vertical Change	.47"	5 ft	5	REF		
62277	269.3 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
62288	281.3 to 304.7 feet	Key Note Segment		5 ft	117			
62260	281.8 to 282.8 feet	Vertical Change	-.26"	5 ft	5	REF		
62261	287.0 to 288.0 feet	Vertical Change	.27"	5 ft	5	REF		
62278	305.2 to 309.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	**$840**
62289	309.4 to 330.8 feet	Key Note Segment		5 ft	107			
62279	332.2 to 333.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
62280	333.7 to 341.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
62281	342.3 to 347.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
62262	345.8 to 346.8 feet	Vertical Change	-.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **DRAKE ST** *Starting at:* **PADRE ST** **$50,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131034	DRAKE ST	SAURET ST	NEPLUS WY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61656	0.3 to 24.6 feet	Key Note Segment		5 ft	122			
61645	25.3 to 26.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300
61657	26.8 to 50.5 feet	Key Note Segment		5 ft	119			
61646	51.4 to 55.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
61647	57.8 to 59.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
61648	64.5 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
61642	67.8 to 68.8 feet	Vertical Change	-.27"	5 ft	5	REF		
61649	72.1 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
61650	75.9 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,940
61658	84.3 to 110.3 feet	Key Note Segment		5 ft	130			
61643	85.6 to 86.6 feet	Vertical Change	-.3"	5 ft	5	REF		
61644	92.5 to 93.5 feet	Vertical Change	.49"	5 ft	5	REF		
61651	111.0 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
61659	114.8 to 137.7 feet	Key Note Segment		5 ft	114			
61652	138.0 to 139.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$200
61653	141.3 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
61660	156.9 to 179.8 feet	Key Note Segment		5 ft	115			
61654	180.8 to 190.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	$5,760
61655	190.4 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840

TOTAL COST FOR: E *side of* **DRAKE ST** *Starting at:* **SAURET ST** **$30,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121409	DRIFTWOOD DR	CYPRESS CT	MAINBERRY DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96196	0.0 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
96197	11.9 to 13.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
96198	13.5 to 18.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,180**
96199	19.3 to 20.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
96200	22.8 to 31.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	45	SF	$120	**$5,400**
96201	32.3 to 43.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
96202	45.7 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
96203	52.3 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
96204	67.7 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,740**
96205	70.6 to 75.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
96206	77.9 to 79.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
96207	80.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
96208	106.8 to 132.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,540**
96209	136.3 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
96210	140.5 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
96195	152.2 to 153.2 feet	**Vertical Change**	.97"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **DRIFTWOOD DR** *Starting at:* **CYPRESS CT** **$80,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121403	DRIFTWOOD DR	HARBOR CT	CYPRESS CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96117	0.0 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
96118	24.7 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
96119	43.8 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
96111	57.7 to 58.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
96120	58.8 to 60.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
96121	62.1 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
96122	65.6 to 76.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
96112	79.3 to 80.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
96123	80.3 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
96124	86.8 to 88.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
96125	89.1 to 101.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,620**
96126	103.7 to 105.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
96127	105.3 to 111.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
96128	112.3 to 117.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
96114	118.4 to 119.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
96129	119.8 to 120.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
96130	123.8 to 126.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
96131	127.3 to 130.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
96115	132.9 to 133.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
96132	134.3 to 136.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,140**
96133	136.9 to 142.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
96134	145.7 to 152.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
96135	152.5 to 156.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,220**
96136	153.3 to 156.8 feet		5.0-6.0%	5 ft	18			
96137	153.3 to 156.8 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
96116	156.7 to 157.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **DRIFTWOOD DR** *Starting at:* **HARBOR CT** **$74,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121415	DRIFTWOOD DR	MAINBERRY DR	SHANNON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96235	0.0 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
96211	1.0 to 2.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
96212	15.8 to 16.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
96236	21.7 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
96269	24.3 to 43.8 feet	Key Note Segment		5 ft	98			
96237	44.3 to 52.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	40	SF	$40	**$1,580**
96214	46.2 to 47.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
96215	50.6 to 51.6 feet	**Vertical Change**	.49"	5 ft	5	REF		
96238	52.2 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
96216	56.6 to 57.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
96239	57.4 to 58.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
96270	58.8 to 78.8 feet	Key Note Segment		5 ft	100			
96217	65.8 to 66.8 feet	**Vertical Change**	1.93"	5 ft	5	REF		
96240	79.8 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
96241	82.3 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
96242	86.6 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
96218	96.5 to 97.5 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
96243	100.5 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
96219	109.3 to 110.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
96244	110.2 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
96245	113.9 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
96220	121.3 to 122.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
96246	123.0 to 124.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
96247	128.0 to 135.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
96221	135.1 to 136.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
96271	135.3 to 164.6 feet	Key Note Segment		5 ft	146			
96222	145.9 to 148.7 feet	**Vertical Change**	.26"	5 ft	14	REF		
96248	166.5 to 168.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121415	DRIFTWOOD DR	MAINBERRY DR	SHANNON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96223	170.1 to 171.1 feet	Vertical Change	.26"	5 ft	5	REF		
96249	170.9 to 183.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
96250	185.8 to 189.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
96272	189.0 to 218.5 feet	Key Note Segment		5 ft	148			
96224	220.6 to 221.6 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
96251	224.2 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
96252	228.2 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
96253	230.8 to 233.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
96273	233.6 to 253.3 feet	Key Note Segment		5 ft	99			
96225	244.1 to 245.1 feet	Vertical Change	-.28"	5 ft	5	REF		
96254	255.5 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,020
96255	274.9 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
96226	279.7 to 280.7 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
96256	283.5 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
96274	294.7 to 323.8 feet	Key Note Segment		5 ft	146			
96227	304.9 to 305.9 feet	Vertical Change	.27"	5 ft	5	REF		
96228	313.6 to 314.6 feet	Vertical Change	-.26"	5 ft	5	REF		
96257	326.3 to 327.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
96229	326.5 to 327.5 feet	Vertical Change	-.27"	5 ft	5	REF		
96258	327.6 to 329.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
96259	330.9 to 345.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	$8,820
96260	346.8 to 350.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
96261	354.3 to 376.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	$13,140
96275	378.4 to 398.6 feet	Key Note Segment		5 ft	101			
96230	389.0 to 390.0 feet	Vertical Change	-.34"	5 ft	5	REF		
96231	402.2 to 403.2 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
96262	403.3 to 412.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,280
96276	412.7 to 442.8 feet	Key Note Segment		5 ft	151			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121415	DRIFTWOOD DR	MAINBERRY DR	SHANNON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96263	442.8 to 464.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	108	SF	$40	$4,300
96232	444.5 to 445.5 feet	Vertical Change	-.3"	5 ft	5	REF		
96233	461.0 to 462.0 feet	Vertical Change	-.26"	5 ft	5	REF		
96264	465.2 to 467.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
96277	467.1 to 487.1 feet	Key Note Segment		5 ft	100			
96265	488.5 to 490.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
96234	489.9 to 490.9 feet	Vertical Change	.48"	5 ft	5	REF		
96266	493.0 to 495.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
96267	495.1 to 513.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	$10,860
96268	513.6 to 536.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	$13,920

TOTAL COST FOR: S *side of* **DRIFTWOOD DR** *Starting at:* **MAINBERRY DR** **$138,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160853	DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69115	0.0 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
69116	4.3 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
69174	19.1 to 33.1 feet	Key Note Segment		5 ft	70			
69081	34.2 to 35.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
69117	34.6 to 36.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
69082	38.0 to 39.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
69118	40.1 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
69119	52.4 to 56.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
69120	58.2 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
69175	70.3 to 84.5 feet	Key Note Segment		5 ft	71			
69083	85.2 to 86.2 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
69121	89.2 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
69084	91.6 to 92.6 feet	**Vertical Change**	-.41"	5 ft	5	REF		
69122	107.3 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
69176	117.2 to 132.3 feet	Key Note Segment		5 ft	76			
69085	140.3 to 141.3 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
69086	144.8 to 145.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
69123	162.8 to 163.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
69124	169.0 to 171.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
69087	170.9 to 171.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
69125	173.0 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
69177	175.7 to 189.0 feet	Key Note Segment		5 ft	67			
69192	192.0 to 193.4 feet		5.0-6.0%	5 ft	7			
69126	192.8 to 194.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
69127	194.2 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
69088	199.4 to 200.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
69128	201.1 to 202.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
69129	205.0 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160853	DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69089	205.5 to 206.5 feet	Vertical Change	.44"	5 ft	5	REF		
69130	214.5 to 221.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
69131	229.3 to 230.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
69178	230.5 to 243.8 feet	Key Note Segment		5 ft	67			
69132	243.8 to 245.2 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	7	SF	$40	$280
69090	246.0 to 247.0 feet	Vertical Change	.58"	5 ft	5	SF	$75	$375
69091	254.7 to 255.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
69193	255.4 to 256.7 feet		5.0-6.0%	5 ft	7			
69133	256.3 to 257.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
69179	257.4 to 273.9 feet	Key Note Segment		5 ft	83			
69092	258.1 to 259.1 feet	Vertical Change	.62"	5 ft	5	REF		
69134	273.9 to 282.5 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	43	SF	$40	$1,720
69135	283.5 to 285.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
69093	283.8 to 284.8 feet	Vertical Change	.55"	5 ft	5	REF		
69136	285.6 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$1,020
69137	292.0 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
69094	301.0 to 302.0 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
69138	306.9 to 315.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
69095	307.0 to 308.0 feet	Vertical Change	.3"	5 ft	5	REF		
69096	309.0 to 310.0 feet	Vertical Change	.56"	5 ft	5	REF		
69180	336.8 to 351.4 feet	Key Note Segment		5 ft	73			
69181	366.1 to 380.3 feet	Key Note Segment		5 ft	71			
69139	380.8 to 393.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
69140	398.5 to 439.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	$24,660
69097	419.6 to 420.6 feet	Vertical Change	.41"	5 ft	5	REF		
69182	439.6 to 453.5 feet	Key Note Segment		5 ft	70			
69141	455.1 to 468.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
69183	471.3 to 485.1 feet	Key Note Segment		5 ft	69			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160853	DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69142	486.8 to 544.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	288	SF	$120	**$34,560**
69098	494.7 to 495.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
69099	501.1 to 502.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
69100	514.0 to 515.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
69101	516.1 to 517.1 feet	**Vertical Change**	-1.39"	5 ft	5	SF	$75	**$375**
69102	522.1 to 523.1 feet	**Vertical Change**	.84"	5 ft	5	REF		
69143	548.3 to 549.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69184	549.6 to 564.5 feet	Key Note Segment		5 ft	75			
69185	577.8 to 590.8 feet	Key Note Segment		5 ft	65			
69144	592.7 to 606.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
69103	634.2 to 635.2 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
69145	645.5 to 650.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
69186	651.8 to 665.8 feet	Key Note Segment		5 ft	70			
69104	653.8 to 654.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
69146	666.9 to 670.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
69147	670.8 to 679.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
69105	678.4 to 679.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
69148	679.6 to 683.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
69187	683.8 to 697.3 feet	Key Note Segment		5 ft	68			
69149	697.4 to 724.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	136	SF	$40	**$5,420**
69106	711.6 to 712.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
69150	738.6 to 744.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
69151	747.8 to 755.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
69152	755.5 to 759.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
69153	759.3 to 762.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
69188	762.1 to 775.8 feet	Key Note Segment		5 ft	69			
69107	763.6 to 764.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
69154	776.5 to 782.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160853	DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69108	777.5 to 778.5 feet	Vertical Change	.38"	5 ft	5	REF		
69189	787.6 to 802.3 feet	Key Note Segment		5 ft	74			
69155	802.3 to 806.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	**$760**
69156	806.1 to 807.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69109	819.6 to 820.6 feet	Vertical Change	.39"	5 ft	5	REF		
69157	820.5 to 821.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69158	826.7 to 827.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
69159	831.4 to 844.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
69110	841.4 to 842.4 feet	Vertical Change	3.53"	5 ft	5	REF		
69160	846.8 to 849.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
69161	849.6 to 854.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
69162	865.2 to 868.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
69163	869.9 to 877.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
69190	877.8 to 892.3 feet	Key Note Segment		5 ft	73			
69111	880.3 to 881.3 feet	Vertical Change	2.58"	5 ft	5	REF		
69112	889.0 to 890.0 feet	Vertical Change	-.26"	5 ft	5	REF		
69164	892.3 to 906.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	70	SF	$40	**$2,800**
69113	904.9 to 905.9 feet	Vertical Change	.26"	5 ft	5	REF		
69165	911.8 to 913.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
69191	914.3 to 928.9 feet	Key Note Segment		5 ft	73			
69166	929.8 to 936.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
69114	930.4 to 931.4 feet	Vertical Change	.38"	5 ft	5	REF		
69167	937.3 to 938.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
69168	940.9 to 945.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
69169	945.4 to 946.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
69170	946.8 to 948.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
69171	950.1 to 954.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
69172	956.4 to 957.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160853	DRIFTWOOD DR	MONOCOTT DR	N GRANADA DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69173	959.0 to 964.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: S *side of* **DRIFTWOOD DR** *Starting at:* **MONOCOTT DR** **$222,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160845	DRIFTWOOD DR	N GRANADA DR	MONOCOTT DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68995	0.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
68996	2.9 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
68972	3.2 to 4.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
68997	22.1 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69063	23.4 to 37.8 feet	Key Note Segment		5 ft	72			
68998	40.4 to 46.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
68999	49.2 to 70.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
69064	70.6 to 84.9 feet	Key Note Segment		5 ft	72			
68973	71.9 to 72.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
69000	85.3 to 88.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
68974	85.8 to 86.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
69001	91.3 to 95.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
69065	95.3 to 110.1 feet	Key Note Segment		5 ft	74			
69002	110.1 to 112.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
69003	112.8 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
69004	133.9 to 139.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
69005	149.0 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69006	156.8 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,900**
69007	168.3 to 169.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
69008	170.3 to 171.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
69066	173.9 to 186.3 feet	Key Note Segment		5 ft	62			
68975	176.3 to 177.3 feet	**Vertical Change**	1.99"	5 ft	5	REF		
68976	189.5 to 190.5 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
69009	191.1 to 192.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
69010	193.2 to 195.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
69011	195.8 to 196.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
68977	198.2 to 199.2 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
69067	200.4 to 213.2 feet	Key Note Segment		5 ft	64			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160845	DRIFTWOOD DR	N GRANADA DR	MONOCOTT DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68978	214.6 to 215.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
69012	217.8 to 234.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	$9,900
69013	237.3 to 244.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
69014	244.3 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
69015	251.2 to 256.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
69016	256.7 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
68979	256.9 to 257.9 feet	Vertical Change	.29"	5 ft	5	REF		
69017	260.3 to 262.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
69018	262.2 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
69019	266.2 to 277.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
68980	273.6 to 274.6 feet	Vertical Change	.37"	5 ft	5	REF		
69020	288.4 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
69068	297.8 to 313.3 feet	Key Note Segment		5 ft	78			
69021	313.3 to 314.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	7	SF	$40	$280
69022	315.8 to 316.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
69023	319.0 to 327.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
69069	327.9 to 342.7 feet	Key Note Segment		5 ft	74			
69024	342.7 to 351.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	42	SF	$40	$1,660
69025	351.0 to 367.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,080
69026	370.3 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
69027	375.7 to 378.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
69028	383.8 to 405.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	$13,080
69070	407.3 to 422.6 feet	Key Note Segment		5 ft	77			
68981	408.7 to 409.7 feet	Vertical Change	-.31"	5 ft	5	REF		
68982	415.3 to 416.3 feet	Vertical Change	.6"	5 ft	5	REF		
68983	420.9 to 421.9 feet	Vertical Change	.35"	5 ft	5	REF		
69029	422.6 to 427.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	24	SF	$40	$960
69030	427.4 to 429.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160845	DRIFTWOOD DR	N GRANADA DR	MONOCOTT DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69031	432.1 to 433.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
69071	433.3 to 447.3 feet	Key Note Segment		5 ft	70			
68984	435.3 to 436.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
69032	448.9 to 450.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
69033	450.3 to 480.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,820**
68985	482.4 to 483.4 feet	**Vertical Change**	-1.11"	5 ft	5	SF	$75	**$375**
69034	503.5 to 505.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
69035	509.0 to 513.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69072	513.4 to 528.8 feet	Key Note Segment		5 ft	77			
68986	515.5 to 516.5 feet	**Vertical Change**	-.55"	5 ft	5	REF		
68987	535.9 to 536.9 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
69036	553.9 to 567.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
69073	567.4 to 581.4 feet	Key Note Segment		5 ft	70			
69037	581.4 to 585.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
69038	585.3 to 586.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69039	597.9 to 601.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
68988	599.4 to 600.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
69074	616.6 to 631.3 feet	Key Note Segment		5 ft	73			
68989	642.7 to 643.7 feet	**Vertical Change**	-1.22"	5 ft	5	SF	$75	**$375**
69040	646.8 to 648.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68990	653.3 to 656.7 feet	**Vertical Change**	.26"	5 ft	17	LF	$75	**$1,275**
69041	657.6 to 672.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
69075	674.4 to 686.7 feet	Key Note Segment		5 ft	62			
69042	686.7 to 689.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
69043	689.3 to 696.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
69044	698.5 to 700.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
69076	701.0 to 719.3 feet	Key Note Segment		5 ft	92			
69045	723.7 to 731.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160845	DRIFTWOOD DR	N GRANADA DR	MONOCOTT DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69046	733.5 to 742.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
69047	746.7 to 747.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68991	749.4 to 750.4 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
69048	752.9 to 780.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
69077	780.7 to 795.1 feet	Key Note Segment		5 ft	72			
69049	796.2 to 799.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
69050	799.8 to 803.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
69051	804.4 to 807.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
69078	808.9 to 822.1 feet	Key Note Segment		5 ft	66			
69052	822.1 to 830.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	41	SF	$40	**$1,640**
69053	832.6 to 835.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
69054	837.9 to 841.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
69055	843.1 to 853.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
68992	855.4 to 856.4 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
68993	875.2 to 876.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
69056	875.9 to 888.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
69079	888.3 to 902.3 feet	Key Note Segment		5 ft	70			
69057	902.3 to 910.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	40	SF	$40	**$1,580**
69058	914.5 to 918.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
69059	920.7 to 923.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
69060	924.3 to 930.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
69080	932.8 to 945.8 feet	Key Note Segment		5 ft	65			
69061	945.8 to 955.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
69062	961.5 to 971.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
68994	961.9 to 962.9 feet	**Vertical Change**	2.14"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **DRIFTWOOD DR** *Starting at:* **N GRANADA DR** **$251,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131334	DRIFTWOOD DR	N GRANADA DR	VALLEY WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97745	1.5 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
97746	4.3 to 5.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
97747	5.5 to 8.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
97748	8.3 to 11.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
97749	12.5 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
97773	16.3 to 31.7 feet	Key Note Segment		5 ft	77			
97737	16.5 to 17.5 feet	**Vertical Change**	.73"	5 ft	5	REF		
97750	32.2 to 37.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$960**
97774	37.1 to 51.3 feet	Key Note Segment		5 ft	71			
97751	51.3 to 58.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
97752	61.6 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
97738	64.2 to 65.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
97753	78.1 to 79.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
97775	79.4 to 93.5 feet	Key Note Segment		5 ft	70			
97754	94.1 to 101.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	37	SF	$40	**$1,460**
97776	101.4 to 116.0 feet	Key Note Segment		5 ft	73			
97755	116.0 to 135.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	98	SF	$40	**$3,900**
97777	137.2 to 149.4 feet	Key Note Segment		5 ft	61			
97756	151.9 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
97778	154.4 to 168.3 feet	Key Note Segment		5 ft	70			
97757	169.1 to 175.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
97758	175.9 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
97779	192.7 to 206.0 feet	Key Note Segment		5 ft	67			
97780	210.4 to 225.3 feet	Key Note Segment		5 ft	75			
97739	225.8 to 226.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
97759	226.2 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
97760	233.2 to 236.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
97761	244.9 to 247.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131334	DRIFTWOOD DR	N GRANADA DR	VALLEY WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97781	248.3 to 262.3 feet	Key Note Segment		5 ft	70			
97762	262.3 to 264.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	12	SF	$40	**$480**
97740	262.4 to 263.4 feet	Vertical Change	.27"	5 ft	5	REF		
97782	266.4 to 279.8 feet	Key Note Segment		5 ft	67			
97763	279.8 to 287.4 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	38	SF	$40	**$1,520**
97764	287.8 to 290.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97765	293.2 to 301.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
97741	294.1 to 295.1 feet	Vertical Change	-.31"	5 ft	5	REF		
97783	304.3 to 317.6 feet	Key Note Segment		5 ft	67			
97742	313.8 to 314.8 feet	Vertical Change	.4"	5 ft	5	REF		
97766	317.6 to 322.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	26	SF	$40	**$1,040**
97784	322.9 to 345.6 feet	Key Note Segment		5 ft	114			
97743	326.5 to 327.5 feet	Vertical Change	-.29"	5 ft	5	REF		
97767	345.6 to 351.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	29	SF	$40	**$1,160**
97768	354.3 to 355.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
97769	355.8 to 360.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
97785	360.9 to 374.7 feet	Key Note Segment		5 ft	69			
97744	362.0 to 363.0 feet	Vertical Change	-.26"	5 ft	5	REF		
97770	375.7 to 378.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
97786	379.0 to 393.2 feet	Key Note Segment		5 ft	71			
97771	409.5 to 416.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
97787	416.9 to 430.1 feet	Key Note Segment		5 ft	66			
97772	430.1 to 432.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	**$420**

TOTAL COST FOR: S *side of* **DRIFTWOOD DR** *Starting at:* **N GRANADA DR** **$59,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121356	DRIFTWOOD DR	SHANNON AVE	HARBOR CT	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96037	0.3 to 12.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
96038	15.2 to 17.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
96034	15.9 to 16.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
96047	17.5 to 37.5 feet	Key Note Segment		5 ft	100			
96035	28.1 to 29.1 feet	**Vertical Change**	.44"	5 ft	5	REF		
96039	38.8 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
96040	41.9 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
96041	54.0 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
96036	56.6 to 57.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
96042	66.0 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
96043	80.6 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96044	84.3 to 85.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
96045	88.3 to 108.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
96046	108.0 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
96048	118.0 to 119.4 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **DRIFTWOOD DR** *Starting at:* **SHANNON AVE** **$48,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131330	DRIFTWOOD DR	VALLEY WAY	N GRANADA DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97700	2.8 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
97726	13.9 to 27.4 feet	Key Note Segment		5 ft	68			
97701	27.4 to 33.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,160**
97727	33.2 to 44.8 feet	Key Note Segment		5 ft	58			
97702	45.5 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
97703	47.6 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
97704	65.1 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
97728	72.6 to 85.9 feet	Key Note Segment		5 ft	67			
97729	90.3 to 103.8 feet	Key Note Segment		5 ft	68			
97705	105.3 to 107.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
97706	107.2 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
97707	119.6 to 121.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
97708	122.7 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
97730	133.1 to 146.4 feet	Key Note Segment		5 ft	67			
97709	149.1 to 151.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
97731	151.1 to 163.9 feet	Key Note Segment		5 ft	64			
97710	165.1 to 167.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
97711	171.3 to 191.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
97696	182.1 to 183.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
97732	191.8 to 205.4 feet	Key Note Segment		5 ft	68			
97712	205.4 to 210.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
97733	210.6 to 223.7 feet	Key Note Segment		5 ft	66			
97713	223.7 to 224.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
97714	226.9 to 238.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
97715	240.3 to 244.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
97716	246.5 to 252.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
97734	254.3 to 267.3 feet	Key Note Segment		5 ft	65			
97717	267.8 to 271.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131330	DRIFTWOOD DR	VALLEY WAY	N GRANADA DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97697	268.4 to 269.4 feet	Vertical Change	.58"	5 ft	5	REF		
97735	272.3 to 286.3 feet	Key Note Segment		5 ft	70			
97718	286.3 to 289.5 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	16	SF	$40	**$640**
97719	290.7 to 303.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
97720	307.5 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
97736	317.7 to 350.3 feet	Key Note Segment		5 ft	163			
97699	319.2 to 320.2 feet	Vertical Change	.34"	5 ft	5	REF		
97721	351.0 to 354.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
97722	354.8 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
97723	363.2 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
97724	366.8 to 372.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
97725	375.3 to 379.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **DRIFTWOOD DR** *Starting at:* **VALLEY WAY** **$83,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101508	DRYSDALE WAY	KOUFAX DR	PODRES LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57090	4.2 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
57112	15.3 to 34.6 feet	Key Note Segment		5 ft	97			
57085	33.6 to 34.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
57091	34.6 to 37.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$540**
57092	37.3 to 41.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
57113	41.3 to 60.3 feet	Key Note Segment		5 ft	95			
57093	61.4 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	235	SF	$120	**$28,140**
57114	108.8 to 127.1 feet	Key Note Segment		5 ft	92			
57094	128.2 to 134.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
57115	134.2 to 153.3 feet	Key Note Segment		5 ft	96			
57095	154.0 to 165.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
57096	165.4 to 200.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
57086	166.5 to 167.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
57116	200.7 to 220.0 feet	Key Note Segment		5 ft	97			
57097	223.8 to 227.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
57117	227.7 to 246.6 feet	Key Note Segment		5 ft	95			
57098	247.6 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
57099	261.3 to 263.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
57100	263.7 to 264.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
57101	269.3 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
57102	275.0 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
57103	282.3 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
57118	292.7 to 313.8 feet	Key Note Segment		5 ft	106			
57087	295.8 to 296.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
57104	315.2 to 316.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
57105	319.1 to 321.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
57119	322.3 to 345.1 feet	Key Note Segment		5 ft	114			
57106	347.2 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101508	DRYSDALE WAY	KOUFAX DR	PODRES LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57107	354.9 to 363.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
57108	367.3 to 385.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
57120	386.6 to 406.6 feet	Key Note Segment		5 ft	100			
57088	403.8 to 404.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
57109	406.7 to 412.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	28	SF	$40	**$1,100**
57121	412.8 to 432.7 feet	Key Note Segment		5 ft	100			
57089	431.9 to 432.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
57110	435.5 to 442.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
57111	442.1 to 447.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
57122	447.3 to 448.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: SW *side of* **DRYSDALE WAY** *Starting at:* **KOUFAX DR** **$118,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101521	DRYSDALE WAY	PODRES LN	SUNRISE AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57210	0.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
57211	11.6 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
57225	15.4 to 36.1 feet	Key Note Segment		5 ft	104			
57212	36.3 to 41.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	25	SF	$40	**$1,000**
57207	38.5 to 39.5 feet	**Vertical Change**	3.58"	5 ft	5	REF		
57226	42.0 to 64.3 feet	Key Note Segment		5 ft	112			
57213	64.6 to 65.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
57214	65.9 to 104.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$23,100**
57227	104.4 to 126.1 feet	Key Note Segment		5 ft	109			
57215	126.4 to 137.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,300**
57216	141.3 to 144.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
57217	144.3 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
57218	150.8 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
57219	160.3 to 178.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	**$10,800**
57220	182.5 to 206.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
57208	187.6 to 188.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
57209	199.5 to 200.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
57221	206.4 to 209.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
57222	209.9 to 218.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
57223	218.5 to 221.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
57224	222.2 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
57228	222.5 to 224.0 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: SW *side of* **DRYSDALE WAY** *Starting at:* **PODRES LN** **$72,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101527	DRYSDALE WAY	SUNRISE AVE	KOUFAX DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57245	1.1 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
57246	5.7 to 34.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	142	SF	$120	**$17,040**
57230	21.3 to 22.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
57290	34.1 to 56.1 feet	Key Note Segment		5 ft	110			
57247	56.9 to 61.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
57248	64.7 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
57249	68.6 to 88.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
57231	86.6 to 87.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
57250	90.4 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
57291	101.2 to 121.4 feet	Key Note Segment		5 ft	101			
57232	101.6 to 102.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
57233	111.9 to 112.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
57234	120.7 to 121.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
57251	122.5 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
57292	127.8 to 146.3 feet	Key Note Segment		5 ft	93			
57252	146.8 to 154.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
57253	156.5 to 160.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
57254	162.9 to 170.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
57255	172.2 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
57256	175.6 to 179.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
57257	179.6 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
57293	190.3 to 210.8 feet	Key Note Segment		5 ft	103			
57258	212.2 to 215.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
57294	216.6 to 237.0 feet	Key Note Segment		5 ft	102			
57259	238.2 to 245.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
57260	249.4 to 260.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
57261	263.7 to 273.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
57262	277.6 to 280.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101527	DRYSDALE WAY	SUNRISE AVE	KOUFAX DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57295	280.6 to 300.8 feet	Key Note Segment		5 ft	101			
57263	300.8 to 307.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	35	SF	$40	$1,380
57296	307.7 to 327.6 feet	Key Note Segment		5 ft	100			
57264	327.9 to 347.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	96	SF	$40	$3,840
57265	347.4 to 371.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	$14,220
57297	371.1 to 391.4 feet	Key Note Segment		5 ft	102			
57266	392.5 to 397.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$2,940
57298	397.4 to 418.9 feet	Key Note Segment		5 ft	108			
57267	418.9 to 425.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	33	SF	$40	$1,300
57268	425.4 to 442.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,320
57235	445.2 to 446.2 feet	Vertical Change	2.39"	5 ft	5	SF	$75	$375
57269	446.8 to 459.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	$7,500
57270	459.6 to 460.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
57299	461.3 to 481.6 feet	Key Note Segment		5 ft	102			
57236	462.1 to 463.1 feet	Vertical Change	.26"	5 ft	5	REF		
57271	483.6 to 487.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
57300	488.9 to 508.7 feet	Key Note Segment		5 ft	99			
57272	509.0 to 521.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	63	SF	$40	$2,520
57273	521.8 to 527.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
57237	531.1 to 532.1 feet	Vertical Change	-.29"	5 ft	5	REF		
57274	531.3 to 549.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$10,980
57301	549.6 to 572.2 feet	Key Note Segment		5 ft	113			
57275	572.8 to 574.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
57302	578.1 to 599.2 feet	Key Note Segment		5 ft	106			
57276	601.7 to 609.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
57277	611.0 to 641.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	151	SF	$120	$18,180
57303	641.7 to 661.7 feet	Key Note Segment		5 ft	100			
57278	663.1 to 665.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101527	DRYSDALE WAY	SUNRISE AVE	KOUFAX DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57279	666.2 to 668.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
57304	668.8 to 689.7 feet	Key Note Segment		5 ft	105			
57238	669.7 to 670.7 feet	**Vertical Change**	.86"	5 ft	5	REF		
57239	688.3 to 689.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
57280	689.9 to 693.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
57281	693.7 to 695.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
57282	698.4 to 701.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
57283	708.9 to 716.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
57284	717.3 to 726.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
57285	729.1 to 731.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
57305	732.3 to 752.4 feet	Key Note Segment		5 ft	101			
57240	751.9 to 752.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
57286	755.3 to 756.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
57306	756.7 to 778.3 feet	Key Note Segment		5 ft	108			
57241	777.4 to 778.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
57287	778.3 to 783.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,080**
57288	784.8 to 797.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
57307	797.6 to 817.5 feet	Key Note Segment		5 ft	100			
57242	798.6 to 799.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
57243	806.8 to 807.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
57244	816.9 to 817.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
57289	818.8 to 826.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: NE *side of* **DRYSDALE WAY** *Starting at:* **SUNRISE AVE** **$202,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140836	DUTRA CT	STEPHANIE LN	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63848	2.2 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
63849	15.2 to 38.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
63824	22.0 to 23.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
63825	30.9 to 31.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
63879	41.5 to 63.5 feet	Key Note Segment		5 ft	110			
63850	71.7 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
63880	76.7 to 104.5 feet	Key Note Segment		5 ft	139			
63826	87.5 to 88.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
63827	97.9 to 98.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
63851	108.3 to 109.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
63852	109.4 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
63853	119.8 to 143.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,340**
63829	145.1 to 146.1 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
63854	148.1 to 211.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	317	SF	$120	**$37,980**
63830	177.3 to 178.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
63831	190.2 to 191.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63881	213.6 to 234.7 feet	Key Note Segment		5 ft	106			
63832	225.6 to 226.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
63890	234.7 to 235.8 feet		5.0-6.0%	5 ft	6			
63833	235.1 to 236.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
63855	239.3 to 248.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
63856	249.1 to 265.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,900**
63834	261.7 to 262.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
63857	268.4 to 271.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
63858	273.3 to 287.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
63882	287.6 to 308.5 feet	Key Note Segment		5 ft	104			
63859	309.8 to 311.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63835	310.9 to 311.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140836	DUTRA CT	STEPHANIE LN	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63883	311.0 to 332.0 feet	Key Note Segment		5 ft	105			
63836	322.4 to 323.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
63860	335.2 to 346.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
63837	335.6 to 336.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
63861	346.6 to 347.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
63884	348.0 to 362.2 feet	Key Note Segment		5 ft	71			
63862	363.9 to 377.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
63885	377.2 to 399.5 feet	Key Note Segment		5 ft	112			
63839	392.4 to 393.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
63840	406.2 to 407.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
63863	425.4 to 426.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63864	430.4 to 440.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
63865	442.2 to 452.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
63866	452.1 to 453.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
63842	455.0 to 456.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
63886	455.0 to 476.0 feet	Key Note Segment		5 ft	105			
63867	477.8 to 482.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
63887	484.6 to 521.6 feet	Key Note Segment		5 ft	185			
63843	484.7 to 485.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
63844	509.7 to 510.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63868	522.9 to 523.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$600**
63869	524.7 to 534.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,580**
63870	536.2 to 550.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
63845	544.3 to 545.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
63871	552.8 to 557.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
63872	560.8 to 581.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
63888	581.5 to 601.8 feet	Key Note Segment		5 ft	101			
63873	606.2 to 622.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140836	DUTRA CT	STEPHANIE LN	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63846	618.4 to 619.4 feet	Vertical Change	-.27"	5 ft	5	REF		
63874	625.3 to 632.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
63875	635.6 to 636.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63876	639.0 to 649.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
63889	650.3 to 671.9 feet	Key Note Segment		5 ft	108			
63847	661.0 to 662.0 feet	Vertical Change	.26"	5 ft	5	REF		
63877	674.2 to 712.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,920**
63878	712.4 to 714.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: N / S *side of* **DUTRA CT** *Starting at:* **STEPHANIE LN** **$216,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140948	DUTRA WAY	ARBELLA LN	STEPHANIE LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64705	0.5 to 2.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
64706	4.1 to 8.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	20	SF	$120	**$2,340**
64745	9.0 to 30.7 feet	Key Note Segment		5 ft	109			
64707	31.8 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	148	SF	$120	**$17,700**
64708	61.3 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
64682	67.3 to 68.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
64683	70.5 to 71.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
64684	72.7 to 73.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
64709	76.3 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64746	84.9 to 105.7 feet	Key Note Segment		5 ft	104			
64685	106.3 to 107.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
64710	107.8 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
64711	122.8 to 139.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
64686	132.0 to 133.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
64687	140.6 to 141.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
64712	143.7 to 152.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
64713	152.7 to 163.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
64714	166.5 to 179.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
64688	180.8 to 181.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
64715	181.5 to 186.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
64716	189.4 to 195.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
64747	197.1 to 217.8 feet	Key Note Segment		5 ft	104			
64717	219.7 to 222.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
64689	222.0 to 223.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
64718	226.0 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
64748	230.8 to 259.8 feet	Key Note Segment		5 ft	145			
64690	259.1 to 260.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
64719	263.0 to 287.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140948	DUTRA WAY	ARBELLA LN	STEPHANIE LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64691	274.2 to 275.2 feet	Vertical Change	-.31"	5 ft	5	REF		
64692	282.9 to 283.9 feet	Vertical Change	-.26"	5 ft	5	REF		
64720	288.8 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
64721	307.3 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
64693	317.2 to 318.2 feet	Vertical Change	.61"	5 ft	5	REF		
64722	320.8 to 338.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
64723	338.8 to 347.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
64724	348.3 to 354.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
64749	356.2 to 377.2 feet	Key Note Segment		5 ft	105			
64694	356.8 to 357.8 feet	Vertical Change	.64"	5 ft	5	REF		
64725	379.7 to 391.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
64726	393.6 to 416.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
64727	417.3 to 431.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
64695	419.9 to 420.9 feet	Vertical Change	.27"	5 ft	5	REF		
64696	432.2 to 433.2 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
64750	432.5 to 453.1 feet	Key Note Segment		5 ft	103			
64728	454.8 to 458.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
64729	458.3 to 460.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
64730	463.0 to 481.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
64731	484.4 to 496.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
64697	485.1 to 486.1 feet	Vertical Change	.28"	5 ft	5	REF		
64732	502.3 to 508.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
64733	511.0 to 513.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
64751	514.7 to 544.8 feet	Key Note Segment		5 ft	150			
64698	544.2 to 545.2 feet	Vertical Change	-.33"	5 ft	5	REF		
64734	545.6 to 581.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,660**
64699	565.7 to 566.7 feet	Vertical Change	.35"	5 ft	5	REF		
64700	578.5 to 579.5 feet	Vertical Change	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140948	DUTRA WAY	ARBELLA LN	STEPHANIE LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64735	585.1 to 590.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
64752	590.8 to 612.0 feet	Key Note Segment		5 ft	106			
64701	601.8 to 602.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64736	612.8 to 618.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
64753	619.7 to 640.5 feet	Key Note Segment		5 ft	104			
64702	641.3 to 642.3 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
64737	642.7 to 681.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,520**
64738	684.0 to 691.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
64754	695.3 to 717.0 feet	Key Note Segment		5 ft	109			
64703	695.5 to 696.5 feet	**Vertical Change**	.61"	5 ft	5	REF		
64704	715.8 to 716.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
64739	717.1 to 726.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	49	SF	$40	**$1,960**
64740	728.0 to 764.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,780**
64755	764.3 to 792.8 feet	Key Note Segment		5 ft	143			
64741	798.3 to 803.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
64742	806.8 to 810.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
64743	813.1 to 831.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
64744	835.1 to 839.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: N *side of* **DUTRA WAY** *Starting at:* **ARBELLA LN** **$281,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140909	DUTRA WAY	N SCHNOOR AVE	ARBELLA LN	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64247	2.1 to 5.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
64248	6.3 to 8.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
64249	9.3 to 35.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	131	SF	$120	**$15,720**
64250	35.8 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
64251	39.8 to 63.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**

TOTAL COST FOR: N *side of* **DUTRA WAY** *Starting at:* **N SCHNOOR AVE** **$33,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140902	DUTRA WAY	STEPHANIE LN	N SCHNOOR AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64184	0.2 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
64185	6.6 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
64166	14.8 to 15.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
64186	17.8 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
64187	37.8 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
64188	45.3 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64167	50.5 to 51.5 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
64234	50.5 to 79.1 feet	Key Note Segment		5 ft	143			
64168	65.0 to 66.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64189	83.8 to 85.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64190	85.0 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
64191	89.1 to 94.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
64235	94.5 to 115.2 feet	Key Note Segment		5 ft	104			
64169	104.5 to 105.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
64170	112.2 to 113.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
64192	116.8 to 123.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
64193	128.4 to 130.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
64194	131.6 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
64195	144.4 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
64196	158.4 to 159.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
64197	160.3 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,340**
64172	166.7 to 167.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
64198	191.3 to 199.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
64199	201.3 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
64236	205.3 to 226.6 feet	Key Note Segment		5 ft	107			
64173	216.4 to 217.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
64200	227.5 to 228.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
64201	229.4 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	197	SF	$120	**$23,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140902	DUTRA WAY	STEPHANIE LN	N SCHNOOR AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64202	269.8 to 279.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
64237	279.8 to 301.4 feet	Key Note Segment		5 ft	108			
64203	304.8 to 309.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
64174	310.5 to 311.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
64238	310.6 to 331.0 feet	Key Note Segment		5 ft	102			
64175	330.7 to 331.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
64204	335.5 to 340.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
64205	343.2 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
64176	352.2 to 353.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
64177	371.2 to 372.2 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
64239	376.0 to 407.7 feet	Key Note Segment		5 ft	159			
64178	378.0 to 379.0 feet	**Vertical Change**	.76"	5 ft	5	REF		
64206	410.4 to 416.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
64207	418.9 to 425.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
64208	425.8 to 427.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64209	430.3 to 468.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,800**
64179	441.5 to 442.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
64240	468.3 to 490.8 feet	Key Note Segment		5 ft	113			
64210	494.7 to 510.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
64211	515.6 to 527.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
64212	532.2 to 535.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
64213	542.1 to 545.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
64241	545.3 to 565.9 feet	Key Note Segment		5 ft	103			
64214	568.8 to 590.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
64215	590.6 to 597.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
64216	601.3 to 612.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
64217	616.2 to 625.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,580**
64218	626.8 to 628.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140902	DUTRA WAY	STEPHANIE LN	N SCHNOOR AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64219	631.2 to 643.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,140**
64220	643.1 to 656.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
64242	657.2 to 679.2 feet	Key Note Segment		5 ft	110			
64221	681.8 to 691.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
64222	695.6 to 728.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
64223	731.2 to 732.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
64224	732.2 to 733.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
64243	736.2 to 764.8 feet	Key Note Segment		5 ft	143			
64180	765.7 to 766.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
64225	768.1 to 771.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
64226	775.1 to 776.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
64227	777.3 to 810.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
64244	810.8 to 832.8 feet	Key Note Segment		5 ft	110			
64182	822.1 to 823.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
64228	833.8 to 841.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
64245	841.6 to 872.6 feet	Key Note Segment		5 ft	155			
64229	873.8 to 884.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
64230	887.1 to 900.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
64231	901.3 to 903.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
64232	905.8 to 915.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
64246	916.8 to 937.8 feet	Key Note Segment		5 ft	105			
64183	938.0 to 939.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
64233	939.8 to 966.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**

TOTAL COST FOR: S *side of* **DUTRA WAY** *Starting at:* **STEPHANIE LN** **$299,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251119	DWYER AVE	HOWARD RD	120 DWYER AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108016	0.0 to 7.0 feet	Key Note Segment		5 ft	35			
108006	7.0 to 8.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
108005	7.4 to 8.4 feet	Vertical Change	-.33"	5 ft	5	REF		
108007	8.1 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108008	15.8 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
108017	16.8 to 77.6 feet	Key Note Segment		5 ft	304			
108009	77.6 to 79.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	**$300**
108010	81.3 to 82.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
108011	92.7 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
108012	97.1 to 108.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
108013	108.8 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
108014	117.3 to 129.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
108015	131.8 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**

TOTAL COST FOR: W *side of* **DWYER AVE** *Starting at:* **HOWARD RD** **$24,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251122	DWYER AVE	MODOC ST	120 DWYER AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108030	0.5 to 27.6 feet	Key Note Segment		5 ft	136			
108023	27.8 to 29.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$240**
108018	27.9 to 28.9 feet	Vertical Change	-.5"	5 ft	5	REF		
108024	29.0 to 33.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
108019	30.2 to 31.2 feet	Vertical Change	.31"	5 ft	5	REF		
108031	33.5 to 64.8 feet	Key Note Segment		5 ft	157			
108020	64.8 to 65.8 feet	Vertical Change	.32"	5 ft	5	REF		
108025	66.5 to 67.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
108026	67.9 to 69.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
108021	71.3 to 72.3 feet	Vertical Change	.28"	5 ft	5	REF		
108027	71.9 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
108022	83.9 to 84.9 feet	Vertical Change	-.55"	5 ft	5	SF	$75	**$375**
108028	85.1 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
108032	104.9 to 130.9 feet	Key Note Segment		5 ft	130			
108029	131.0 to 136.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	**$1,180**

TOTAL COST FOR: W *side of* **DWYER AVE** *Starting at:* **MODOC ST** **$18,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251124	DWYER AVE	MODOC ST	178 DWYER AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108035	2.6 to 45.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	212	SF	$120	**$25,440**
108036	47.5 to 48.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
108033	50.7 to 51.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
108037	50.8 to 52.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
108034	57.1 to 58.1 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
108038	64.6 to 84.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
108039	84.8 to 87.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
108041	87.3 to 111.4 feet	Key Note Segment		5 ft	121			
108040	111.4 to 114.1 feet	**Cross Slope (Driveway)**	10.0-11.0%	5 ft	14	SF	$40	**$540**

TOTAL COST FOR: W *side of* **DWYER AVE** *Starting at:* **MODOC ST** **$41,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251136	DWYER AVE	PLUMAS ST	HOWARD RD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108078	1.3 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
108079	15.7 to 59.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
108080	70.2 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	321	SF	$120	**$38,460**
108070	103.3 to 104.3 feet	**Vertical Change**	2.08"	5 ft	5	REF		
108081	136.7 to 155.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
108082	159.0 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
108108	160.5 to 176.7 feet	Key Note Segment		5 ft	81			
108083	177.1 to 181.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$880**
108084	182.3 to 185.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
108109	185.5 to 200.5 feet	Key Note Segment		5 ft	75			
108072	186.1 to 187.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
108085	200.5 to 214.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	71	SF	$40	**$2,840**
108073	202.1 to 203.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
108086	214.7 to 233.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
108087	236.4 to 237.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
108088	237.6 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
108074	258.8 to 259.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
108089	260.2 to 269.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
108110	269.3 to 285.6 feet	Key Note Segment		5 ft	82			
108075	287.6 to 288.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
108090	289.1 to 293.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
108091	293.6 to 298.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108092	309.8 to 317.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
108093	319.2 to 320.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
108094	321.3 to 330.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
108095	334.5 to 378.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	218	SF	$120	**$26,160**
108076	362.3 to 363.3 feet	**Vertical Change**	.81"	5 ft	5	REF		
108111	378.1 to 404.2 feet	Key Note Segment		5 ft	131			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251136	DWYER AVE	PLUMAS ST	HOWARD RD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108096	405.8 to 407.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
108097	407.0 to 417.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
108098	418.3 to 460.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	213	SF	$120	**$25,560**
108077	420.2 to 421.2 feet	**Vertical Change**	.89"	5 ft	5	REF		
108099	463.0 to 467.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
108100	467.7 to 469.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
108101	470.3 to 476.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
108102	476.8 to 478.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
108103	531.3 to 534.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
108104	540.8 to 542.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
108105	547.9 to 556.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
108106	562.9 to 569.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
108107	576.8 to 579.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: E *side of* **DWYER AVE** *Starting at:* **PLUMAS ST** **$213,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071040	E ADELL ST	MERCED ST	N LAKE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122403	3.5 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
122449	19.8 to 33.9 feet	Key Note Segment		5 ft	71			
122388	21.0 to 22.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
122404	34.3 to 39.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
122450	46.6 to 60.4 feet	Key Note Segment		5 ft	69			
122389	49.8 to 50.8 feet	**Vertical Change**	.75"	5 ft	5	REF		
122390	66.5 to 67.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
122405	75.6 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
122406	89.1 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
122407	94.5 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
122408	102.9 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
122451	116.8 to 131.3 feet	Key Note Segment		5 ft	73			
122409	131.3 to 133.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
122410	136.1 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
122452	142.0 to 160.5 feet	Key Note Segment		5 ft	93			
122411	164.0 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
122453	199.4 to 213.3 feet	Key Note Segment		5 ft	70			
122412	214.9 to 215.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122413	218.1 to 219.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
122414	221.8 to 224.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
122415	226.0 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
122454	243.5 to 257.3 feet	Key Note Segment		5 ft	69			
122416	262.8 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,820**
122455	292.5 to 306.5 feet	Key Note Segment		5 ft	70			
122417	306.6 to 309.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
122418	313.1 to 315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
122419	320.3 to 327.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
122420	333.8 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071040	E ADELL ST	MERCED ST	N LAKE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122456	338.7 to 351.0 feet	Key Note Segment		5 ft	62			
122392	347.5 to 348.5 feet	Vertical Change	3.5"	5 ft	5	REF		
122421	351.0 to 369.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	94	SF	$40	$3,760
122393	355.2 to 356.2 feet	Vertical Change	2.7"	5 ft	5	REF		
122422	382.6 to 384.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
122423	389.5 to 395.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
122424	403.0 to 404.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
122457	405.2 to 415.1 feet	Key Note Segment		5 ft	50			
122425	417.6 to 427.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
122426	430.3 to 437.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
122458	438.1 to 451.0 feet	Key Note Segment		5 ft	65			
122394	452.2 to 453.2 feet	Vertical Change	2.14"	5 ft	5	SF	$75	$375
122427	456.7 to 498.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	$24,780
122395	483.0 to 484.0 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
122428	504.4 to 509.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
122429	512.0 to 514.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
122459	516.3 to 530.9 feet	Key Note Segment		5 ft	73			
122430	540.4 to 542.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,140
122431	545.8 to 549.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
122432	551.7 to 552.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
122460	554.3 to 568.9 feet	Key Note Segment		5 ft	73			
122433	569.4 to 582.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	67	SF	$40	$2,680
122396	571.5 to 572.5 feet	Vertical Change	.49"	5 ft	5	REF		
122434	593.2 to 596.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,220
122397	600.0 to 601.0 feet	Vertical Change	3.19"	5 ft	5	SF	$75	$375
122435	609.3 to 613.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
122398	619.4 to 620.4 feet	Vertical Change	1.06"	5 ft	5	SF	$75	$375
122436	620.9 to 622.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071040	E ADELL ST	MERCED ST	N LAKE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122399	621.4 to 622.4 feet	Vertical Change	.29"	5 ft	5	REF		
122400	625.7 to 626.7 feet	Vertical Change	1.81"	5 ft	5	SF	$75	**$375**
122401	638.3 to 639.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
122437	646.5 to 650.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
122438	654.3 to 662.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
122439	671.8 to 676.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
122440	680.7 to 688.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
122441	694.3 to 699.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
122442	703.1 to 717.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
122461	718.1 to 736.3 feet	Key Note Segment		5 ft	91			
122443	737.9 to 743.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
122402	772.4 to 773.4 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
122444	775.8 to 776.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
122445	779.8 to 780.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
122462	784.3 to 805.5 feet	Key Note Segment		5 ft	106			
122446	807.0 to 808.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
122447	810.8 to 813.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
122448	817.5 to 824.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: N *side of* **E ADELL ST** *Starting at:* **MERCED ST** **$169,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071047	E ADELL ST	N LAKE ST	MERCED ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122490	0.0 to 2.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
122491	2.6 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
122492	15.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
122550	28.2 to 49.3 feet	Key Note Segment		5 ft	106			
122493	54.3 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
122494	67.4 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
122495	90.4 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
122496	108.6 to 116.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
122497	117.3 to 126.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
122551	128.4 to 140.3 feet	Key Note Segment		5 ft	60			
122498	140.5 to 143.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	13	SF	$40	**$500**
122499	145.1 to 147.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
122500	147.7 to 166.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
122552	175.2 to 189.5 feet	Key Note Segment		5 ft	72			
122501	191.4 to 192.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
122502	193.7 to 217.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
122553	218.0 to 234.3 feet	Key Note Segment		5 ft	82			
122463	227.2 to 228.2 feet	Vertical Change	-.27"	5 ft	5	REF		
122503	236.2 to 240.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
122504	242.6 to 250.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
122554	256.0 to 274.3 feet	Key Note Segment		5 ft	92			
122505	275.9 to 278.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
122506	278.2 to 284.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
122507	286.8 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
122465	296.2 to 297.2 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
122508	301.8 to 305.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
122555	305.7 to 324.0 feet	Key Note Segment		5 ft	92			
122509	325.9 to 327.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071047	E ADELL ST	N LAKE ST	MERCED ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122510	329.8 to 347.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
122556	347.5 to 360.4 feet	Key Note Segment		5 ft	65			
122511	366.3 to 369.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
122512	372.1 to 383.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
122557	386.6 to 400.2 feet	Key Note Segment		5 ft	68			
122466	394.3 to 395.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
122513	404.2 to 407.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
122467	404.3 to 405.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
122514	409.8 to 432.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,680**
122468	416.2 to 417.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
122469	431.1 to 432.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
122515	433.0 to 434.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
122470	434.2 to 435.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
122558	434.5 to 445.4 feet	Key Note Segment		5 ft	55			
122559	446.1 to 448.4 feet	Key Note Segment		5 ft	12			
122516	452.6 to 454.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
122517	461.1 to 462.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
122518	462.8 to 464.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
122519	466.5 to 471.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
122520	474.3 to 477.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
122521	482.3 to 485.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
122560	486.8 to 499.2 feet	Key Note Segment		5 ft	62			
122522	499.2 to 500.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
122472	503.8 to 504.8 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
122523	508.1 to 511.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
122473	512.0 to 513.0 feet	**Vertical Change**	1.18"	5 ft	5	SF	$75	**$375**
122524	517.4 to 544.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,140**
122525	547.3 to 548.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071047	E ADELL ST	N LAKE ST	MERCED ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122526	553.8 to 556.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
122527	556.8 to 573.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,840
122528	585.2 to 586.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
122561	588.9 to 612.3 feet	Key Note Segment		5 ft	117			
122474	593.7 to 594.7 feet	Vertical Change	.63"	5 ft	5	REF		
122475	603.4 to 604.4 feet	Vertical Change	3.17"	5 ft	5	REF		
122529	620.8 to 622.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
122476	628.5 to 631.2 feet	Vertical Change	.27"	5 ft	14	LF	$75	$1,013
122530	633.7 to 636.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
122531	638.9 to 640.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
122532	643.7 to 656.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
122533	660.1 to 661.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
122477	668.5 to 669.5 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
122478	675.6 to 676.6 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
122534	690.0 to 691.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
122562	697.8 to 719.1 feet	Key Note Segment		5 ft	107			
122479	706.2 to 707.2 feet	Vertical Change	1.75"	5 ft	5	REF		
122535	719.1 to 728.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	49	SF	$40	$1,940
122480	729.7 to 730.7 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
122536	731.1 to 732.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
122537	732.7 to 733.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
122481	732.8 to 733.8 feet	Vertical Change	1.92"	5 ft	5	REF		
122482	734.9 to 735.9 feet	Vertical Change	2.8"	5 ft	5	SF	$75	$375
122538	737.0 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
122483	746.7 to 747.7 feet	Vertical Change	.62"	5 ft	5	SF	$75	$375
122539	752.8 to 754.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
122540	754.8 to 761.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
122484	758.8 to 759.8 feet	Vertical Change	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071047	E ADELL ST	N LAKE ST	MERCED ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122541	764.7 to 767.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
122542	767.3 to 770.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
122543	772.3 to 773.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
122544	773.8 to 776.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
122545	780.9 to 784.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
122546	784.8 to 786.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
122485	785.7 to 786.7 feet	**Vertical Change**	2.29"	5 ft	5	REF		
122547	787.0 to 789.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
122486	787.5 to 788.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
122487	790.9 to 791.9 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
122548	796.3 to 828.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
122488	803.9 to 804.9 feet	**Vertical Change**	1.58"	5 ft	5	REF		
122489	830.0 to 831.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
122549	833.5 to 842.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: S *side of* **E ADELL ST** *Starting at:* **N LAKE ST** **$236,642.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110181551	E ALMOND AVE	BLUEBERRY LN	PEAR ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72522	0.2 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
72523	10.7 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
72524	28.6 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72525	37.2 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
72526	56.0 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
72527	62.9 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
72528	89.7 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72529	95.6 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
72530	115.8 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
72531	130.2 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
72532	140.9 to 142.2 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **E ALMOND AVE** *Starting at:* **BLUEBERRY LN** **$55,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110181549	E ALMOND AVE	KIWI ST	BLUEBERRY LN	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72519	7.8 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72520	88.0 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72521	145.4 to 146.8 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **E ALMOND AVE** *Starting at:* **KIWI ST** **$1,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181529	E ALMOND AVE	KIWI ST	RD 28	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72422	4.1 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
72423	23.1 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **E ALMOND AVE** *Starting at:* **KIWI ST** **$4,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181428	E ALMOND AVE	KNOX RD	PAPAYA ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71938	3.7 to 4.7 feet	Vertical Change	-.66"	5 ft	5	SF	$75	$375
71945	20.3 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,400
71946	40.4 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
71947	60.3 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
71948	73.8 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
71949	87.0 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
71939	98.1 to 99.1 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
71940	108.8 to 109.8 feet	Vertical Change	-.63"	5 ft	5	SF	$75	$375
71950	122.1 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
71951	127.6 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,500
71952	150.1 to 153.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
71953	157.8 to 187.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	$18,060
71941	158.7 to 159.7 feet	Vertical Change	.41"	5 ft	5	REF		
71942	170.9 to 171.9 feet	Vertical Change	.32"	5 ft	5	REF		
71954	188.5 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$10,980
71943	206.8 to 207.8 feet	Vertical Change	.31"	5 ft	5	REF		
71955	216.8 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,320
71944	243.8 to 244.8 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375

TOTAL COST FOR: S *side of* **E ALMOND AVE** *Starting at:* **KNOX RD** **$73,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181523	E ALMOND AVE	PAPAYA ST	PEAR ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72387	2.3 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
72388	21.5 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
72389	82.8 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
72390	89.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
72391	147.8 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
72392	152.7 to 155.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
72393	158.4 to 160.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: S *side of* **E ALMOND AVE** *Starting at:* **PAPAYA ST** **$19,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110181359	E ALMOND AVE	PEAR ST	KNOX ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71616	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71617	11.5 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
71618	38.6 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71619	64.0 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71620	79.3 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
71621	102.6 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71622	118.1 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
71623	127.9 to 129.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
71624	129.6 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
71625	148.0 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
71626	159.2 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71627	163.4 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
71608	163.7 to 164.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71628	176.4 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71609	184.0 to 185.0 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
71629	188.4 to 191.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
71610	191.1 to 192.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71630	195.1 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71631	204.3 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71632	211.7 to 214.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
71633	215.8 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
71634	219.8 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
71635	232.0 to 233.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
71636	236.3 to 241.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
71637	246.6 to 252.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
71638	252.0 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
71639	256.7 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
71611	269.7 to 270.7 feet	**Vertical Change**	.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110181359	E ALMOND AVE	PEAR ST	KNOX ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71640	275.8 to 278.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
71641	280.8 to 300.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
71612	285.2 to 286.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
71613	297.1 to 298.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
71614	299.3 to 300.3 feet	**Vertical Change**	.64"	5 ft	5	REF		
71642	314.9 to 335.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
71643	340.7 to 343.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
71644	347.7 to 365.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
71645	367.2 to 374.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
71646	376.8 to 381.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
71647	388.9 to 402.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
71648	405.9 to 416.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
71649	418.2 to 455.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,500**
71615	445.0 to 446.0 feet	**Vertical Change**	1.06"	5 ft	5	REF		
71651	456.3 to 457.4 feet		5.0-6.0%	5 ft	6			
71650	467.8 to 470.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: N *side of* **E ALMOND AVE** *Starting at:* **PEAR ST** **$143,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181528	E ALMOND AVE	PEAR ST	KIWI ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72397	3.3 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72398	8.9 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
72399	18.9 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
72400	24.2 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
72401	25.4 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
72402	29.8 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
72415	32.9 to 49.3 feet	Key Note Segment		5 ft	82			
72416	59.5 to 74.8 feet	Key Note Segment		5 ft	77			
72403	74.8 to 82.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
72394	85.3 to 86.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
72404	95.3 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
72417	110.3 to 126.2 feet	Key Note Segment		5 ft	80			
72395	125.9 to 126.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
72405	131.9 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
72418	135.9 to 152.3 feet	Key Note Segment		5 ft	82			
72406	156.1 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
72407	165.8 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
72419	189.1 to 203.9 feet	Key Note Segment		5 ft	74			
72408	203.9 to 205.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
72420	214.4 to 229.3 feet	Key Note Segment		5 ft	75			
72409	229.6 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
72410	241.8 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
72411	248.2 to 258.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
72421	265.6 to 280.8 feet	Key Note Segment		5 ft	76			
72396	283.7 to 284.7 feet	**Vertical Change**	3.39"	5 ft	5	SF	$75	**$375**
72412	299.3 to 301.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72413	309.2 to 310.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
72414	338.8 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181528	E ALMOND AVE	PEAR ST	KIWI ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **E ALMOND AVE**	*Starting at:* **PEAR ST**					**$43,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110181547	E ALMOND AVE	TOZER ST	KIWI ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72515	9.8 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
72516	21.8 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
72517	33.8 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
72518	44.1 to 45.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **E ALMOND AVE** *Starting at:* **TOZER ST** **$4,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041133	E CENTRAL AVE	101 E CENTRAL AVE	105 E CENTRAL AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121193	25.9 to 39.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	54	SF	$120	**$6,432**
121194	41.8 to 56.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	60	SF	$120	**$7,248**
121195	56.9 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
121219	60.1 to 75.8 feet	Key Note Segment		4 ft	63			
121178	65.1 to 66.1 feet	**Vertical Change**	.3"	4 ft	4	REF		
121225	75.8 to 77.2 feet		5.0-6.0%	4 ft	6			
121179	76.2 to 77.2 feet	**Vertical Change**	.63"	4 ft	4	REF		
121196	79.8 to 100.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	83	SF	$120	**$9,936**
121180	100.2 to 101.2 feet	**Vertical Change**	.48"	4 ft	4	REF		
121197	109.2 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
121220	110.3 to 128.1 feet	Key Note Segment		4 ft	71			
121182	111.5 to 112.5 feet	**Vertical Change**	1.28"	4 ft	4	REF		
121198	130.4 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
121199	141.4 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,032**
121221	162.8 to 178.8 feet	Key Note Segment		4 ft	64			
121200	181.4 to 195.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	54	SF	$120	**$6,528**
121201	197.3 to 203.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	24	SF	$120	**$2,928**
121202	205.3 to 206.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
121203	207.2 to 208.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
121204	209.5 to 225.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	64	SF	$120	**$7,632**
121205	226.9 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
121222	235.4 to 268.3 feet	Key Note Segment		4 ft	132			
121184	265.9 to 266.9 feet	**Vertical Change**	.54"	4 ft	4	REF		
121206	270.2 to 278.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	**$3,888**
121185	277.1 to 278.1 feet	**Vertical Change**	.29"	4 ft	4	REF		
121207	279.3 to 287.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
121223	287.2 to 319.0 feet	Key Note Segment		4 ft	127			
121186	287.9 to 288.9 feet	**Vertical Change**	-.47"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041133	E CENTRAL AVE	101 E CENTRAL AVE	105 E CENTRAL AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121187	319.0 to 320.0 feet	**Vertical Change**	.3"	4 ft	4	REF		
121208	334.3 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
121188	337.7 to 338.7 feet	**Vertical Change**	.39"	4 ft	4	LF	$75	**$300**
121209	340.9 to 357.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
121210	359.2 to 387.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	112	SF	$120	**$13,488**
121211	387.3 to 389.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
121212	391.7 to 393.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
121213	406.8 to 408.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
121214	411.6 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,928**
121215	430.5 to 436.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	26	SF	$120	**$3,072**
121189	433.1 to 434.1 feet	**Vertical Change**	.42"	4 ft	4	REF		
121216	437.3 to 439.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
121217	440.1 to 444.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	19	SF	$120	**$2,256**
121190	443.2 to 444.2 feet	**Vertical Change**	.33"	4 ft	4	REF		
121224	445.7 to 469.0 feet	Key Note Segment		4 ft	93			
121191	469.2 to 470.2 feet	**Vertical Change**	-.27"	4 ft	4	REF		
121218	471.3 to 478.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,408**
121192	480.3 to 481.3 feet	**Vertical Change**	-.41"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: N *side of* **E CENTRAL AVE** *Starting at:* **101 E CENTRAL AVE** **$108,024.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211151	E CENTRAL AVE	E 2ND ST	320 E CENTRAL AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42839	8.1 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
42840	54.8 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
42838	81.5 to 82.5 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
42841	83.1 to 91.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: S *side of* **E CENTRAL AVE** *Starting at:* **E 2ND ST** **$13,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041128	E CENTRAL AVE	N D ST	133 E CENTRAL AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121177	2.0 to 82.1 feet	Key Note Segment		5 ft	401			
121175	2.6 to 3.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
121176	51.5 to 52.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **E CENTRAL AVE** *Starting at:* **N D ST** **$0.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071134	E CLARK ST	1030 E CLARK ST	1030 E CLARK ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122947	0.0 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$9,024**
122948	21.2 to 23.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,152**
122944	22.1 to 23.1 feet	**Vertical Change**	.37"	4 ft	4	REF		
122949	24.9 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
122951	27.8 to 40.5 feet	Key Note Segment		4 ft	51			
122945	38.8 to 39.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
122950	41.3 to 43.7 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	10	SF	$120	**$1,152**
122946	43.6 to 44.6 feet	**Vertical Change**	.58"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **E CLARK ST** *Starting at:* **1030 E CLARK ST** **$12,432.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071136	E CLARK ST	1116 E CLARK ST	1116 E CLARK ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122952	1.5 to 2.5 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
122953	6.6 to 7.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
122956	8.7 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
122954	12.4 to 13.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
122955	23.6 to 24.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E CLARK ST** *Starting at:* **1116 E CLARK ST** **$10,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071139	E CLARK ST	1128 E CLARK ST	TULARE ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122957	2.8 to 3.8 feet	Vertical Change	.62"	5 ft	5	SF	$75	**$375**
122959	16.2 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
122960	29.8 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
122961	36.3 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
122962	51.3 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
122963	52.3 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
122958	61.0 to 62.0 feet	Vertical Change	-.3"	5 ft	5	REF		
122964	61.7 to 72.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
122965	72.7 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
122966	88.4 to 96.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**

TOTAL COST FOR: S *side of* **E CLARK ST** *Starting at:* **1128 E CLARK ST** **$39,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011658	E CLARK ST	AUSTIN AVE	513 ASHLAN WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117347	0.3 to 2.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$864**
117348	2.5 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117349	3.5 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117350	11.8 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
117333	22.1 to 23.1 feet	**Vertical Change**	-.31"	4 ft	4	REF		
117366	27.8 to 46.4 feet	Key Note Segment		4 ft	74			
117334	44.2 to 47.6 feet	**Vertical Change**	.32"	4 ft	14	REF		
117351	50.0 to 52.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
117367	53.9 to 73.0 feet	Key Note Segment		4 ft	76			
117335	75.1 to 76.1 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
117336	77.1 to 78.1 feet	**Vertical Change**	.44"	4 ft	4	LF	$75	**$300**
117352	79.5 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,704**
117353	89.3 to 101.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	48	SF	$120	**$5,808**
117354	101.4 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	123	SF	$120	**$14,784**
117368	132.8 to 151.7 feet	Key Note Segment		4 ft	76			
117337	133.2 to 134.2 feet	**Vertical Change**	-.37"	4 ft	4	REF		
117338	151.8 to 152.8 feet	**Vertical Change**	.31"	4 ft	4	REF		
117355	152.2 to 156.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	16	SF	$40	**$640**
117356	158.9 to 160.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$576**
117369	160.7 to 180.0 feet	Key Note Segment		4 ft	77			
117339	178.7 to 179.7 feet	**Vertical Change**	.62"	4 ft	4	REF		
117357	182.8 to 186.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
117340	184.9 to 185.9 feet	**Vertical Change**	.31"	4 ft	4	REF		
117358	187.4 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	150	SF	$120	**$17,952**
117341	212.4 to 213.4 feet	**Vertical Change**	.29"	4 ft	4	REF		
117359	227.9 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
117360	236.8 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
117370	238.1 to 257.4 feet	Key Note Segment		4 ft	77			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011658	E CLARK ST	AUSTIN AVE	513 ASHLAN WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117343	241.7 to 242.7 feet	Vertical Change	2.92"	4 ft	4	REF		
117344	248.5 to 249.5 feet	Vertical Change	1.36"	4 ft	4	REF		
117361	259.3 to 264.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,496**
117345	263.7 to 264.7 feet	Vertical Change	.53"	4 ft	4	REF		
117371	265.3 to 282.1 feet	Key Note Segment		4 ft	67			
117362	284.7 to 289.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
117363	292.3 to 293.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
117364	293.5 to 296.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
117365	302.7 to 313.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	44	SF	$120	**$5,232**

TOTAL COST FOR: N *side of* **E CLARK ST** *Starting at:* **AUSTIN AVE** **$70,744.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011551	E CLARK ST	N D ST	AUSTIN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116893	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
116859	1.2 to 2.2 feet	**Vertical Change**	-.39"	4 ft	4	REF		
116860	2.5 to 3.5 feet	**Vertical Change**	.3"	4 ft	4	REF		
116894	2.8 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
116895	10.0 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
116896	18.8 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
116897	28.1 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
116861	29.5 to 30.5 feet	**Vertical Change**	.3"	4 ft	4	REF		
116898	30.0 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
116937	35.4 to 53.4 feet	Key Note Segment		4 ft	72			
116938	36.5 to 55.0 feet	Key Note Segment		4 ft	74			
116899	57.0 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
116900	57.1 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
116939	60.5 to 75.9 feet	Key Note Segment		4 ft	62			
116901	61.2 to 62.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	5	SF	$40	**$208**
116940	62.5 to 77.8 feet	Key Note Segment		4 ft	61			
116862	76.2 to 78.8 feet	**Vertical Change**	.33"	4 ft	10	REF		
116902	80.6 to 81.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
116903	81.0 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
116904	81.8 to 85.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
116905	87.2 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
116906	97.8 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$5,952**
116954	100.6 to 101.9 feet		5.0-6.0%	4 ft	5			
116863	110.7 to 111.7 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
116907	115.0 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,584**
116908	118.7 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
116909	135.0 to 139.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
116864	137.6 to 138.6 feet	**Vertical Change**	-.46"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011551	E CLARK ST	N D ST	AUSTIN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116865	139.9 to 140.9 feet	Vertical Change	.58"	4 ft	4	SF	$75	$300
116941	140.4 to 159.3 feet	Key Note Segment		4 ft	76			
116910	162.7 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$528
116942	163.8 to 181.4 feet	Key Note Segment		4 ft	70			
116911	183.4 to 184.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
116912	187.3 to 192.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	$2,544
116913	192.6 to 212.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	$9,552
116866	214.2 to 215.2 feet	Vertical Change	-.29"	4 ft	4	LF	$75	$300
116914	234.3 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,920
116943	246.2 to 263.8 feet	Key Note Segment		4 ft	70			
116944	269.8 to 286.4 feet	Key Note Segment		4 ft	66			
116867	313.2 to 314.2 feet	Vertical Change	.29"	4 ft	4	LF	$75	$300
116868	317.0 to 318.0 feet	Vertical Change	.4"	4 ft	4	LF	$75	$300
116869	319.5 to 320.5 feet	Vertical Change	-.41"	4 ft	4	LF	$75	$300
116915	349.3 to 351.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	9	SF	$120	$1,056
116870	349.6 to 350.6 feet	Vertical Change	-.41"	4 ft	4	REF		
116945	351.6 to 368.7 feet	Key Note Segment		4 ft	68			
116946	373.9 to 392.6 feet	Key Note Segment		4 ft	75			
116871	392.6 to 393.6 feet	Vertical Change	-.37"	4 ft	4	REF		
116916	422.0 to 426.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,920
116873	431.0 to 432.0 feet	Vertical Change	.41"	4 ft	4	LF	$75	$300
116874	436.6 to 437.6 feet	Vertical Change	2.95"	4 ft	4	SF	$75	$300
116875	450.2 to 451.2 feet	Vertical Change	-.48"	4 ft	4	LF	$75	$300
116947	455.2 to 472.9 feet	Key Note Segment		4 ft	71			
116876	456.3 to 457.3 feet	Vertical Change	-.29"	4 ft	4	REF		
116877	473.4 to 474.4 feet	Vertical Change	-.27"	4 ft	4	REF		
116948	480.3 to 497.5 feet	Key Note Segment		4 ft	69			
116878	480.7 to 481.7 feet	Vertical Change	.29"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011551	E CLARK ST	N D ST	AUSTIN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116879	498.1 to 499.1 feet	Vertical Change	.3"	4 ft	4	REF		
116917	501.0 to 503.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,344
116880	502.3 to 503.3 feet	Vertical Change	-.31"	4 ft	4	REF		
116918	506.2 to 529.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	94	SF	$120	$11,232
116881	533.5 to 534.5 feet	Vertical Change	.33"	4 ft	4	LF	$75	$300
116882	535.7 to 536.7 feet	Vertical Change	3.08"	4 ft	4	SF	$75	$300
116919	544.6 to 547.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	$1,488
116883	546.8 to 547.8 feet	Vertical Change	.31"	4 ft	4	REF		
116920	550.4 to 554.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,112
116949	561.0 to 578.6 feet	Key Note Segment		4 ft	70			
116921	580.7 to 584.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	$1,968
116950	585.3 to 602.6 feet	Key Note Segment		4 ft	69			
116922	604.3 to 609.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	21	SF	$120	$2,496
116884	608.3 to 609.3 feet	Vertical Change	-.26"	4 ft	4	REF		
116923	612.7 to 618.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	$2,688
116924	618.3 to 625.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	30	SF	$120	$3,552
116925	625.7 to 627.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	$1,008
116926	627.8 to 630.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
116951	638.1 to 655.3 feet	Key Note Segment		4 ft	69			
116927	659.8 to 671.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	45	SF	$120	$5,376
116928	673.9 to 677.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	$1,920
116929	682.7 to 684.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	$912
116930	688.3 to 692.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	$1,872
116885	691.6 to 692.6 feet	Vertical Change	.36"	4 ft	4	REF		
116886	695.2 to 696.2 feet	Vertical Change	-.29"	4 ft	4	REF		
116931	695.5 to 713.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	72	SF	$120	$8,592
116887	709.7 to 710.7 feet	Vertical Change	.36"	4 ft	4	REF		
116888	712.8 to 713.8 feet	Vertical Change	-.31"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011551	E CLARK ST	N D ST	AUSTIN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116889	714.6 to 715.6 feet	Vertical Change	.38"	4 ft	4	LF	$75	$300
116952	719.3 to 737.3 feet	Key Note Segment		4 ft	72			
116890	736.6 to 737.6 feet	Vertical Change	-.26"	4 ft	4	REF		
116932	740.3 to 743.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
116953	743.5 to 761.0 feet	Key Note Segment		4 ft	70			
116933	763.2 to 774.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	47	SF	$120	$5,616
116891	767.0 to 768.0 feet	Vertical Change	-.29"	4 ft	4	REF		
116934	774.9 to 775.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	$480
116935	776.2 to 788.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	48	SF	$120	$5,808
116936	788.3 to 796.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	33	SF	$120	$3,984
116892	789.1 to 790.1 feet	Vertical Change	-.29"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **E CLARK ST** *Starting at:* **N D ST** **$120,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021143	E CLARK ST	N LAKE ST	400 CLARK ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117794	0.6 to 1.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
117795	4.7 to 5.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
117798	6.5 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
117796	11.4 to 12.4 feet	Vertical Change	.7"	5 ft	5	REF		
117797	15.5 to 16.5 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
117799	16.7 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**

TOTAL COST FOR: S *side of* **E CLARK ST** *Starting at:* **N LAKE ST** **$12,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071127	E CLARK ST	TULARE ST	N LAKE ST	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122859	3.0 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
122860	16.8 to 38.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
122861	42.0 to 67.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,180**
122819	67.0 to 68.0 feet	**Vertical Change**	.85"	5 ft	5	REF		
122862	67.3 to 77.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,820**
122863	78.1 to 79.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
122864	82.0 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
122865	87.3 to 91.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
122866	95.3 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
122820	96.5 to 97.5 feet	**Vertical Change**	-.44"	5 ft	5	REF		
122921	104.8 to 118.1 feet	Key Note Segment		5 ft	67			
122821	120.1 to 121.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
122867	121.7 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
122868	142.8 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
122869	169.0 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
122941	185.6 to 186.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
122870	188.7 to 191.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
122822	191.9 to 192.9 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
122922	192.2 to 210.3 feet	Key Note Segment		5 ft	91			
122871	210.7 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
122823	217.4 to 218.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
122923	218.4 to 237.9 feet	Key Note Segment		5 ft	98			
122824	223.2 to 224.2 feet	**Vertical Change**	.59"	5 ft	5	REF		
122825	236.4 to 237.4 feet	**Vertical Change**	2.92"	5 ft	5	REF		
122872	238.3 to 239.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$240**
122873	239.9 to 249.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
122874	252.9 to 254.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
122875	257.9 to 263.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071127	E CLARK ST	TULARE ST	N LAKE ST	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122876	263.2 to 266.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
122924	266.8 to 287.8 feet	Key Note Segment		5 ft	105			
122826	281.8 to 282.8 feet	**Vertical Change**	2.16"	5 ft	5	REF		
122827	287.0 to 288.0 feet	**Vertical Change**	1.39"	5 ft	5	REF		
122877	290.4 to 294.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
122878	294.8 to 304.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
122925	305.3 to 322.5 feet	Key Note Segment		5 ft	86			
122828	310.0 to 311.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
122829	315.6 to 316.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
122879	322.5 to 342.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	99	SF	$40	**$3,940**
122830	339.7 to 340.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
122880	344.3 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
122926	350.3 to 367.9 feet	Key Note Segment		5 ft	88			
122831	350.8 to 351.8 feet	**Vertical Change**	.52"	5 ft	5	REF		
122832	356.2 to 357.2 feet	**Vertical Change**	.94"	5 ft	5	REF		
122881	387.1 to 391.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
122882	397.5 to 400.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
122883	408.0 to 410.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
122833	408.2 to 409.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
122884	436.7 to 448.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
122834	441.7 to 442.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
122835	449.9 to 450.9 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
122927	451.5 to 469.1 feet	Key Note Segment		5 ft	88			
122885	470.7 to 474.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
122928	477.1 to 495.3 feet	Key Note Segment		5 ft	91			
122836	477.2 to 478.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
122837	488.0 to 489.0 feet	**Vertical Change**	-.52"	5 ft	5	REF		
122943	497.0 to 498.0 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071127	E CLARK ST	TULARE ST	N LAKE ST	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122886	497.4 to 509.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
122887	509.8 to 512.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
122888	514.8 to 523.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
122889	524.6 to 545.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,420**
122929	545.3 to 561.0 feet	Key Note Segment		5 ft	79			
122890	561.0 to 562.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$260**
122891	566.7 to 568.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
122892	569.1 to 576.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
122893	577.3 to 588.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
122838	583.4 to 584.4 feet	**Vertical Change**	-.87"	5 ft	5	REF		
122930	588.5 to 605.2 feet	Key Note Segment		5 ft	84			
122839	588.8 to 589.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
122894	605.2 to 623.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	93	SF	$40	**$3,720**
122931	628.8 to 646.1 feet	Key Note Segment		5 ft	87			
122840	638.5 to 639.5 feet	**Vertical Change**	.64"	5 ft	5	REF		
122895	646.1 to 656.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,140**
122841	652.6 to 653.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
122842	659.7 to 660.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
122843	666.9 to 667.9 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
122932	667.1 to 681.3 feet	Key Note Segment		5 ft	71			
122896	683.2 to 686.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
122897	687.5 to 695.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
122933	695.5 to 714.6 feet	Key Note Segment		5 ft	96			
122844	697.1 to 698.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
122845	705.6 to 706.6 feet	**Vertical Change**	.66"	5 ft	5	REF		
122898	716.9 to 717.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122899	723.4 to 725.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
122847	726.3 to 727.3 feet	**Vertical Change**	3.5"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071127	E CLARK ST	TULARE ST	N LAKE ST	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122934	729.0 to 757.8 feet	Key Note Segment		5 ft	144			
122900	757.8 to 759.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$400
122901	760.8 to 763.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
122902	765.6 to 791.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	$15,540
122848	773.5 to 774.5 feet	Vertical Change	-.27"	5 ft	5	REF		
122849	786.2 to 790.2 feet	Vertical Change	.29"	5 ft	20	REF		
122903	793.7 to 795.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
122935	796.4 to 813.3 feet	Key Note Segment		5 ft	85			
122904	813.3 to 814.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300
122850	816.1 to 817.1 feet	Vertical Change	2.26"	5 ft	5	SF	$75	$375
122905	818.8 to 821.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
122906	822.3 to 830.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	$4,680
122942	822.4 to 823.4 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
122907	830.1 to 842.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	$7,380
122936	843.3 to 861.3 feet	Key Note Segment		5 ft	90			
122937	863.4 to 879.2 feet	Key Note Segment		5 ft	79			
122908	882.3 to 892.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	$6,360
122909	894.2 to 908.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,700
122910	910.8 to 915.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
122911	918.0 to 920.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
122851	920.7 to 921.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
122938	932.8 to 941.5 feet	Key Note Segment		5 ft	44			
122852	933.6 to 934.6 feet	Vertical Change	-.45"	5 ft	5	REF		
122912	946.3 to 949.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
122913	962.6 to 972.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
122914	973.2 to 975.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,560
122939	975.8 to 984.8 feet	Key Note Segment		5 ft	45			
122915	986.5 to 1014.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	$16,740

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071127	E CLARK ST	TULARE ST	N LAKE ST	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122916	1015.1 to 1016.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122940	1019.2 to 1027.9 feet	Key Note Segment		5 ft	44			
122917	1028.2 to 1031.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
122853	1029.6 to 1030.6 feet	**Vertical Change**	2.53"	5 ft	5	REF		
122918	1049.1 to 1063.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
122854	1054.5 to 1055.5 feet	**Vertical Change**	2.36"	5 ft	5	REF		
122855	1057.0 to 1058.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
122919	1066.5 to 1068.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
122920	1076.0 to 1079.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
122856	1084.6 to 1085.6 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
122857	1089.8 to 1090.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
122858	1091.7 to 1092.7 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **E CLARK ST** *Starting at:* **TULARE ST** **$272,918.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091653	E CLEVELAND AVE	1218 E CLEVELAND AVE	RAYMOND RD	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131045	0.0 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	98	SF	$120	**$11,712**
131046	16.3 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	34	SF	$120	**$4,128**
131047	20.8 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	150	SF	$120	**$18,048**
131048	45.3 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	84	SF	$120	**$10,080**
131049	58.8 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	98	SF	$120	**$11,712**
131050	71.3 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	90	SF	$120	**$10,752**
131051	91.8 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	99	SF	$120	**$11,904**
131052	106.3 to 117.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	90	SF	$120	**$10,848**
131053	122.8 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	47	SF	$120	**$5,664**
131054	133.0 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	106	SF	$120	**$12,768**
131055	150.9 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	57	SF	$120	**$6,816**
131056	161.9 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	99	SF	$120	**$11,904**
131057	176.8 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	148	SF	$120	**$17,760**
131035	181.7 to 182.7 feet	**Vertical Change**	-.27"	8 ft	8	REF		
131058	209.1 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	158	SF	$120	**$18,912**
131059	234.3 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,920**
131060	240.0 to 285.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	365	SF	$120	**$43,776**
131061	290.0 to 294.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	32	SF	$120	**$3,840**
131062	295.3 to 301.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$6,048**
131036	304.1 to 305.1 feet	**Vertical Change**	-.26"	8 ft	8	REF		
131063	304.5 to 320.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	125	SF	$120	**$14,976**
131064	320.1 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	29	SF	$120	**$3,456**
131065	325.1 to 333.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	66	SF	$120	**$7,968**
131066	334.9 to 339.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	38	SF	$120	**$4,512**
131067	340.5 to 354.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	110	SF	$120	**$13,152**
131068	355.4 to 356.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
131069	359.5 to 372.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	106	SF	$120	**$12,672**
131070	376.3 to 378.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,632**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091653	E CLEVELAND AVE	1218 E CLEVELAND AVE	RAYMOND RD	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131071	381.5 to 389.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	66	SF	$120	**$7,872**
131072	393.8 to 398.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	34	SF	$120	**$4,032**
131073	399.6 to 423.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	191	SF	$120	**$22,944**
131037	407.8 to 408.8 feet	**Vertical Change**	.27"	8 ft	8	REF		
131074	429.1 to 455.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	210	SF	$120	**$25,248**
131075	459.0 to 479.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	166	SF	$120	**$19,872**
131076	480.8 to 488.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	64	SF	$120	**$7,680**
131077	489.1 to 491.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	17	SF	$120	**$2,016**
131078	495.1 to 497.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	21	SF	$120	**$2,496**
131079	500.3 to 503.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	29	SF	$120	**$3,456**
131080	512.8 to 559.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	374	SF	$120	**$44,832**
131038	530.4 to 531.4 feet	**Vertical Change**	-.32"	8 ft	8	REF		
131081	564.2 to 568.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	33	SF	$120	**$3,936**
131082	568.3 to 572.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	35	SF	$120	**$4,224**
131083	574.8 to 628.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	431	SF	$120	**$51,744**
131039	626.1 to 627.1 feet	**Vertical Change**	.66"	8 ft	8	REF		
131084	630.8 to 645.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	116	SF	$120	**$13,920**
131085	647.2 to 682.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	286	SF	$120	**$34,272**
131086	689.5 to 693.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	34	SF	$120	**$4,128**
131087	694.0 to 696.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	**$2,784**
131088	697.8 to 702.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	38	SF	$120	**$4,512**
131089	702.5 to 709.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	52	SF	$120	**$6,240**
131090	711.4 to 723.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	95	SF	$120	**$11,424**
131091	725.6 to 745.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	155	SF	$120	**$18,624**
131092	747.3 to 755.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	68	SF	$120	**$8,160**
131093	759.2 to 768.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	74	SF	$120	**$8,928**
131094	768.5 to 773.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	38	SF	$120	**$4,608**
131095	777.2 to 797.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	158	SF	$120	**$19,008**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091653	E CLEVELAND AVE	1218 E CLEVELAND AVE	RAYMOND RD	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131096	799.5 to 811.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	93	SF	$120	**$11,136**
131097	813.2 to 853.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	326	SF	$120	**$39,072**
131040	843.1 to 844.1 feet	**Vertical Change**	.31"	8 ft	8	REF		
131098	863.2 to 867.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	33	SF	$120	**$3,936**
131099	868.2 to 872.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
131100	875.1 to 889.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	114	SF	$120	**$13,728**
131101	892.5 to 928.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	290	SF	$120	**$34,848**
131102	931.3 to 933.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,400**
131103	936.3 to 942.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	48	SF	$120	**$5,760**
131104	942.6 to 944.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,112**
131105	949.8 to 954.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	39	SF	$120	**$4,704**
131106	958.3 to 984.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	210	SF	$120	**$25,248**
131107	989.6 to 998.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	69	SF	$120	**$8,256**
131041	998.5 to 999.5 feet	**Vertical Change**	.49"	8 ft	8	LF	$75	**$600**
131108	1001.3 to 1024.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	184	SF	$120	**$22,080**
131109	1024.3 to 1061.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	298	SF	$120	**$35,712**
131110	1065.3 to 1083.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	142	SF	$120	**$17,088**
131111	1087.2 to 1088.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	9	SF	$120	**$1,056**
131112	1091.2 to 1108.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	138	SF	$120	**$16,512**
131113	1110.9 to 1130.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	159	SF	$120	**$19,104**
131114	1131.0 to 1137.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,528**
131115	1138.6 to 1150.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	92	SF	$120	**$11,040**
131043	1146.4 to 1147.4 feet	**Vertical Change**	.56"	8 ft	8	REF		
131116	1152.5 to 1153.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	10	SF	$120	**$1,248**
131117	1156.8 to 1230.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	589	SF	$120	**$70,656**
131044	1159.6 to 1160.6 feet	**Vertical Change**	.41"	8 ft	8	REF		
131118	1230.4 to 1234.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	31	SF	$120	**$3,744**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **1218 E CLEVELAND AVE** **$975,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/W	2202091657	E CLEVELAND AVE	1491 E YOSEMITE AVE	E YOSEMITE AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131124	19.5 to 55.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	180	SF	$120	**$21,600**
131125	56.1 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
131126	65.1 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
131119	75.3 to 76.3 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
131127	97.1 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
131128	104.6 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
131129	116.4 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
131130	129.6 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
131120	137.8 to 138.8 feet	**Vertical Change**	2.85"	5 ft	5	SF	$75	**$375**
131121	168.9 to 169.9 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
131131	190.2 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
131132	207.0 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
131133	231.0 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
131134	244.8 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
131135	261.2 to 264.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
131136	270.2 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
131137	283.8 to 287.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
131138	290.3 to 295.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
131139	300.1 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131140	306.3 to 308.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
131141	308.9 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
131142	329.3 to 364.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
131143	368.3 to 401.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
131144	403.3 to 432.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
131122	435.1 to 436.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
131123	439.1 to 440.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
131145	442.5 to 449.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: S/W *side of* **E CLEVELAND AVE** *Starting at:* **1491 E YOSEMITE AVE** **$149,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091549	E CLEVELAND AVE	1501 E YOSEMITE AVE	1501 E YOSEMITE AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130680	7.4 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
130681	28.6 to 30.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**

TOTAL COST FOR: E *side of* **E CLEVELAND AVE** *Starting at:* **1501 E YOSEMITE AVE** **$1,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N	2202091552	E CLEVELAND AVE	1501 E YOSEMITE AVE	RAYMOND RD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130690	0.0 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
130691	14.7 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
130692	32.1 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
130693	42.1 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
130682	53.3 to 54.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
130694	70.8 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
130695	78.9 to 89.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
130696	89.7 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
130683	99.2 to 100.2 feet	**Vertical Change**	2.83"	5 ft	5	REF		
130697	110.6 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
130698	120.2 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
130684	127.0 to 128.0 feet	**Vertical Change**	1.17"	5 ft	5	REF		
130699	133.8 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
130700	143.2 to 155.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
130685	146.6 to 147.6 feet	**Vertical Change**	1.68"	5 ft	5	REF		
130701	166.4 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
130702	189.3 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	342	SF	$120	**$41,040**
130686	193.2 to 194.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
130687	201.0 to 202.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
130688	225.5 to 226.5 feet	**Vertical Change**	2.08"	5 ft	5	REF		
130703	260.7 to 268.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
130704	274.3 to 291.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
130689	274.4 to 275.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
130705	288.9 to 290.8 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: E/N *side of* **E CLEVELAND AVE** *Starting at:* **1501 E YOSEMITE AVE** **$139,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091558	E CLEVELAND AVE	1725 E CLEVELAND AVE	MALTA AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130721	1.8 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
130722	10.5 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,480**
130723	41.7 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
130706	61.6 to 62.6 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
130724	71.9 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
130725	79.4 to 86.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,140**
130726	88.6 to 91.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
130727	93.9 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
130707	101.5 to 102.5 feet	**Vertical Change**	.9"	5 ft	5	SF	$75	**$375**
130728	105.3 to 106.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
130708	108.0 to 109.0 feet	**Vertical Change**	-.55"	5 ft	5	SF	$75	**$375**
130729	115.7 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	248	SF	$120	**$29,700**
130730	168.7 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
130709	178.3 to 179.3 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
130710	182.7 to 183.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
130731	184.4 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
130760	196.6 to 236.0 feet	Key Note Segment		5 ft	197			
130711	197.7 to 198.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
130732	238.1 to 258.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
130733	258.7 to 260.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
130712	261.6 to 262.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
130713	279.4 to 280.4 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
130734	289.9 to 294.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
130714	296.0 to 297.0 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
130735	325.0 to 326.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
130736	327.6 to 330.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
130715	328.1 to 329.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
130737	331.1 to 333.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091558	E CLEVELAND AVE	1725 E CLEVELAND AVE	MALTA AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130763	334.3 to 335.3 feet		8.0-9.0%	5 ft	5			
130761	340.8 to 365.9 feet	Key Note Segment		5 ft	126			
130738	365.9 to 368.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	$460
130716	369.7 to 370.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
130717	382.6 to 383.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
130739	410.8 to 420.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
130718	417.0 to 418.0 feet	Vertical Change	.3"	5 ft	5	REF		
130740	432.9 to 438.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
130741	441.5 to 459.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
130742	461.8 to 467.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
130743	470.6 to 482.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
130719	475.4 to 476.4 feet	Vertical Change	.27"	5 ft	5	REF		
130744	485.2 to 491.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
130745	492.6 to 493.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
130746	494.4 to 496.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
130747	498.7 to 500.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
130748	502.4 to 505.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
130749	511.6 to 517.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,420
130720	516.3 to 517.3 feet	Vertical Change	.26"	5 ft	5	REF		
130762	517.7 to 552.1 feet	Key Note Segment		5 ft	172			
130750	553.3 to 554.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
130751	557.1 to 561.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
130752	562.7 to 564.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
130753	568.5 to 569.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
130754	593.0 to 599.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
130755	602.9 to 606.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
130756	608.7 to 621.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,440
130757	621.7 to 638.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	$10,020

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091558	E CLEVELAND AVE	1725 E CLEVELAND AVE	MALTA AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130758	641.4 to 645.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
130759	647.3 to 653.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **1725 E CLEVELAND AVE** **$179,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071451	E CLEVELAND AVE	AUSTIN AVE	DELLAVALLE AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44128	1.5 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
44129	4.3 to 6.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,134**
44130	7.3 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,970**
44131	31.8 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,072**
44132	48.6 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,178**
44133	69.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,130**
44134	86.0 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
44121	91.5 to 92.5 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$338**
44145	95.8 to 160.2 feet	Key Note Segment		5 ft	290			
44122	97.1 to 98.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
44123	137.4 to 138.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
44124	150.7 to 151.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
44125	152.4 to 153.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
44126	158.7 to 159.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44135	160.4 to 168.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	37	SF	$40	**$1,494**
44136	168.7 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,142**
44137	207.3 to 217.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**
44138	220.3 to 223.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,836**
44139	224.3 to 232.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
44140	236.5 to 243.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,672**
44127	246.8 to 247.8 feet	**Vertical Change**	-.89"	5 ft	5	REF		
44141	247.8 to 252.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,484**
44142	253.0 to 255.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,296**
44143	275.3 to 281.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,402**
44144	281.8 to 284.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,188**
44146	286.7 to 298.8 feet	Key Note Segment		5 ft	54			

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **AUSTIN AVE** **$77,593.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071629	E CLEVELAND AVE	AUSTIN AVE	CUTTING ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44609	4.3 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
44610	16.3 to 22.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
44618	22.2 to 43.7 feet	Key Note Segment		5 ft	108			
44611	44.8 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,120**
44612	87.3 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
44619	99.0 to 127.0 feet	Key Note Segment		5 ft	140			
44606	100.2 to 101.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
44607	126.2 to 127.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
44613	127.0 to 152.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	128	SF	$40	**$5,100**
44614	154.8 to 172.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
44615	174.7 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
44616	191.9 to 224.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,440**
44608	214.8 to 215.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
44617	241.1 to 252.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **AUSTIN AVE** **$93,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071636	E CLEVELAND AVE	BLOKER ST	N LAKE ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44641	3.0 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
44642	6.7 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
44643	30.0 to 35.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
44644	36.5 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
44645	49.9 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,620**
44640	65.9 to 66.9 feet	**Vertical Change**	1.28"	5 ft	5	REF		
44646	110.7 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
44653	122.9 to 148.4 feet	Key Note Segment		5 ft	128			
44647	148.7 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
44648	151.0 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
44649	162.4 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
44654	173.8 to 198.3 feet	Key Note Segment		5 ft	123			
44650	224.4 to 226.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
44651	228.0 to 237.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
44652	239.3 to 240.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **BLOKER ST** **$49,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091605	E CLEVELAND AVE	CALIMYRNA AVE	KADOTA AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130789	2.3 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
130790	14.2 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
130791	26.7 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
130792	64.9 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
130793	74.2 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
130794	86.3 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
130795	104.8 to 109.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
130796	110.4 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
130797	132.3 to 141.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
130798	149.2 to 154.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **CALIMYRNA AVE** **$73,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091603	E CLEVELAND AVE	CELESTE CT	CALIMYRNA AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130779	0.0 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
130780	3.4 to 8.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
130777	10.3 to 11.3 feet	**Vertical Change**	2.53"	5 ft	5	REF		
130781	10.9 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
130782	14.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
130783	33.3 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
130784	51.4 to 80.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,280**
130778	58.9 to 59.9 feet	**Vertical Change**	.81"	5 ft	5	REF		
130785	85.0 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
130786	104.6 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,760**
130787	145.6 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
130788	150.8 to 157.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **CELESTE CT** **$75,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071518	E CLEVELAND AVE	COLUMBIA ST	SONORA ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44247	0.0 to 2.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
44248	4.8 to 6.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
44249	24.2 to 31.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
44250	34.1 to 40.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
44251	43.2 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
44244	52.1 to 53.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44260	61.6 to 86.2 feet	Key Note Segment		5 ft	123			
44252	86.2 to 93.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,420**
44245	94.5 to 95.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
44253	94.7 to 108.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
44254	109.0 to 116.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
44261	119.4 to 147.8 feet	Key Note Segment		5 ft	142			
44246	129.5 to 130.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
44255	148.3 to 149.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
44256	152.7 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
44257	169.4 to 215.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	230	SF	$120	**$27,600**
44258	220.0 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
44259	237.4 to 258.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **COLUMBIA ST** **$90,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071606	E CLEVELAND AVE	COLUMBIA ST	SIERRA ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44502	1.3 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
44503	32.6 to 43.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
44504	43.5 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
44505	53.4 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
44506	73.7 to 84.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
44507	87.0 to 90.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
44508	91.3 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
44509	96.2 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
44517	123.3 to 150.8 feet	Key Note Segment		5 ft	138			
44510	150.8 to 177.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	133	SF	$40	**$5,340**
44518	177.5 to 198.8 feet	Key Note Segment		5 ft	107			
44511	201.5 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
44512	210.1 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44513	216.6 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
44514	235.4 to 250.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
44515	269.1 to 278.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
44516	278.1 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **COLUMBIA ST** **$87,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071632	E CLEVELAND AVE	CUTTING ST	BLOKER ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44623	0.3 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
44624	11.0 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
44625	12.0 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
44626	33.7 to 34.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
44627	37.0 to 41.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
44628	41.9 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
44629	48.6 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
44630	64.4 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,140**
44631	96.8 to 100.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
44632	103.7 to 127.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
44638	127.8 to 156.8 feet	Key Note Segment		5 ft	145			
44639	170.6 to 199.2 feet	Key Note Segment		5 ft	143			
44620	185.5 to 186.5 feet	**Vertical Change**	.58"	5 ft	5	REF		
44633	199.2 to 212.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	66	SF	$40	**$2,620**
44634	215.0 to 249.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	172	SF	$120	**$20,580**
44635	249.8 to 253.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
44636	275.8 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
44637	282.4 to 321.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
44622	306.9 to 307.9 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **CUTTING ST** **$105,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071526	E CLEVELAND AVE	DAVIS ST	TORONADO DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44280	11.3 to 31.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
44281	34.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
44282	78.1 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
44283	83.3 to 90.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
44284	95.4 to 108.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
44285	111.8 to 118.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
44286	119.9 to 121.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44287	123.7 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
44288	157.3 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
44289	160.8 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
44290	163.8 to 166.3 feet		5.0-6.0%	5 ft	12			
44291	163.8 to 166.3 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,500**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **DAVIS ST** **$67,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071558	E CLEVELAND AVE	DAVIS ST	SONORA ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44453	0.0 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
44454	6.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44455	10.7 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
44456	17.3 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
44457	27.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
44458	35.3 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
44459	45.4 to 66.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
44460	68.8 to 72.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
44461	73.2 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	254	SF	$120	**$30,420**
44462	127.5 to 168.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,840**
44463	171.3 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
44464	181.3 to 191.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
44465	192.7 to 197.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
44466	202.2 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
44467	205.1 to 211.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
44468	213.6 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
44477	226.6 to 257.8 feet	Key Note Segment		5 ft	156			
44469	257.8 to 263.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,140**
44470	266.3 to 269.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
44471	275.3 to 278.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
44478	278.4 to 298.5 feet	Key Note Segment		5 ft	101			
44472	299.4 to 306.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
44479	306.4 to 326.1 feet	Key Note Segment		5 ft	99			
44473	326.1 to 345.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	95	SF	$40	**$3,800**
44474	345.1 to 351.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
44475	371.2 to 374.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
44476	375.1 to 377.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **DAVIS ST** **$131,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071455	E CLEVELAND AVE	DELLAVALLE AVE	NEBRASKA AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44150	0.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
44151	23.5 to 26.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
44152	26.5 to 37.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
44153	37.0 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
44154	50.0 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
44155	58.6 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
44164	73.4 to 102.3 feet	Key Note Segment		5 ft	144			
44156	105.4 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
44165	121.0 to 149.7 feet	Key Note Segment		5 ft	143			
44147	133.2 to 134.2 feet	**Vertical Change**	.9"	5 ft	5	REF		
44157	150.1 to 151.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
44158	151.3 to 172.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,540**
44166	172.2 to 197.1 feet	Key Note Segment		5 ft	125			
44159	197.1 to 213.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	84	SF	$40	**$3,340**
44160	213.8 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
44148	235.2 to 236.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44161	236.7 to 245.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
44162	264.3 to 267.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
44149	271.8 to 272.8 feet	**Vertical Change**	.54"	5 ft	5	REF		
44163	272.3 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **DELLAVALLE AVE** **$69,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071621	E CLEVELAND AVE	DELLAVALLE AVE	AUSTIN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44581	3.9 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,212**
44582	11.7 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
44583	32.4 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,646**
44584	39.9 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
44585	45.6 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
44586	56.6 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
44593	86.8 to 114.5 feet	Key Note Segment		5 ft	125			
44577	87.4 to 88.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
44578	113.3 to 114.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44594	128.5 to 158.0 feet	Key Note Segment		5 ft	133			
44587	158.1 to 176.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	81	SF	$40	**$3,240**
44579	170.0 to 171.0 feet	**Vertical Change**	.57"	5 ft	5	REF		
44588	178.6 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
44595	181.8 to 210.8 feet	Key Note Segment		5 ft	131			
44589	210.8 to 212.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$288**
44590	246.0 to 254.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
44591	276.7 to 277.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
44580	277.3 to 278.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
44592	280.1 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,508**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **DELLAVALLE AVE** **$27,342.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071646	E CLEVELAND AVE	FRESNO ST	MERCED ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44682	2.2 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
44683	29.2 to 36.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
44684	36.8 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
44685	38.9 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
44679	49.8 to 50.8 feet	**Vertical Change**	-.45"	5 ft	5	REF		
44710	49.8 to 81.1 feet	Key Note Segment		5 ft	156			
44686	83.3 to 92.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
44687	93.1 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
44688	97.2 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
44680	106.1 to 107.1 feet	**Vertical Change**	3.16"	5 ft	5	SF	$75	**$375**
44689	107.5 to 144.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	185	SF	$120	**$22,200**
44690	145.5 to 155.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
44691	155.7 to 158.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
44692	159.3 to 164.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
44693	165.4 to 185.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
44694	187.1 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
44695	202.4 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
44681	214.9 to 215.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
44711	217.3 to 238.5 feet	Key Note Segment		5 ft	106			
44696	240.1 to 241.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
44697	242.5 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
44698	253.5 to 261.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
44712	262.6 to 285.6 feet	Key Note Segment		5 ft	115			
44699	285.6 to 286.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$260**
44713	288.8 to 311.6 feet	Key Note Segment		5 ft	114			
44700	313.8 to 337.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
44701	339.3 to 347.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
44702	351.7 to 353.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071646	E CLEVELAND AVE	FRESNO ST	MERCED ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44703	355.1 to 361.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
44704	379.7 to 384.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
44705	386.3 to 391.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
44706	391.6 to 393.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
44707	401.3 to 407.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
44708	409.8 to 412.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
44709	421.6 to 425.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **FRESNO ST** **$136,730.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071437	E CLEVELAND AVE	FRESNO ST	N LAKE ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44042	1.6 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,346**
44043	32.2 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,588**
44044	57.8 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
44045	63.2 to 70.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,726**
44046	70.1 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
44057	73.8 to 102.0 feet	Key Note Segment		5 ft	127			
44047	108.8 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
44040	126.6 to 127.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
44058	129.1 to 158.2 feet	Key Note Segment		5 ft	131			
44048	158.2 to 172.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	63	SF	$40	**$2,502**
44049	175.2 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
44050	178.9 to 181.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
44051	184.8 to 187.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
44052	188.3 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,158**
44053	198.2 to 199.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
44054	202.8 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,724**
44041	205.2 to 206.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
44059	215.4 to 250.8 feet	Key Note Segment		5 ft	159			
44055	251.3 to 252.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$234**
44056	255.2 to 265.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**

TOTAL COST FOR: W *side of* **E CLEVELAND AVE** *Starting at:* **FRESNO ST** **$52,038.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091608	E CLEVELAND AVE	KADOTA AVE	TULARE ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130804	0.2 to 18.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,860**
130805	18.7 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,460**
130806	36.2 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
130807	51.3 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
130808	59.5 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
130809	81.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
130799	82.6 to 83.6 feet	**Vertical Change**	-.53"	5 ft	5	REF		
130810	99.1 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
130811	101.5 to 107.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
130812	107.9 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
130813	112.6 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
130800	116.4 to 117.4 feet	**Vertical Change**	.47"	5 ft	5	REF		
130814	129.8 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
130815	141.2 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
130816	172.8 to 178.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
130817	199.1 to 200.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130801	199.8 to 200.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
130824	207.2 to 231.3 feet	Key Note Segment		5 ft	121			
130802	208.5 to 209.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
130818	236.5 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130819	239.8 to 251.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
130820	252.6 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130821	257.1 to 279.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
130822	284.3 to 295.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
130803	296.6 to 297.6 feet	**Vertical Change**	1.02"	5 ft	5	SF	$75	**$375**
130823	303.2 to 309.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **KADOTA AVE** **$104,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091600	E CLEVELAND AVE	MALTA AVE	CELESTE CT	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130766	1.3 to 9.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
130767	9.3 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
130768	17.7 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
130764	21.0 to 22.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
130769	24.4 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
130770	45.2 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
130771	50.9 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
130772	87.0 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
130773	90.5 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
130765	94.0 to 95.0 feet	**Vertical Change**	.69"	5 ft	5	REF		
130774	111.8 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
130775	140.3 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
130776	155.0 to 158.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **MALTA AVE** **$56,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071353	E CLEVELAND AVE	MERCED ST	ROGERS ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43729	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,376**
43730	7.9 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**
43731	9.8 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
43751	12.8 to 38.6 feet	Key Note Segment		5 ft	116			
43732	38.6 to 40.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$324**
43733	40.6 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
43734	46.1 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**
43735	53.3 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
43736	56.9 to 68.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,994**
43737	68.0 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,942**
43738	77.8 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
43739	80.6 to 87.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,726**
43740	89.8 to 99.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,022**
43752	99.1 to 128.1 feet	Key Note Segment		5 ft	131			
43741	128.1 to 130.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$432**
43742	130.5 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,294**
43743	139.0 to 142.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,728**
43744	144.3 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
43745	151.7 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
43746	155.8 to 179.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,636**
43747	179.7 to 193.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,398**
43748	194.4 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,556**
43749	217.4 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,156**
43750	228.8 to 229.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **MERCED ST** **$74,196.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071651	E CLEVELAND AVE	MERCED ST	TULARE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44721	1.1 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
44722	28.9 to 36.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
44714	33.1 to 34.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
44723	38.5 to 39.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
44724	40.2 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,620**
44725	57.9 to 59.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
44740	59.4 to 81.3 feet	Key Note Segment		5 ft	110			
44726	82.6 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
44727	98.3 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
44741	103.3 to 123.6 feet	Key Note Segment		5 ft	102			
44715	122.8 to 123.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
44728	125.8 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
44729	145.3 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,620**
44730	168.5 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
44742	173.4 to 194.7 feet	Key Note Segment		5 ft	107			
44716	174.7 to 175.7 feet	**Vertical Change**	-.98"	5 ft	5	REF		
44731	198.1 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
44732	200.8 to 213.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
44733	213.5 to 214.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44743	216.3 to 253.0 feet	Key Note Segment		5 ft	184			
44717	234.3 to 235.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
44734	254.5 to 263.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
44735	265.7 to 275.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
44744	276.6 to 294.3 feet	Key Note Segment		5 ft	88			
44718	277.9 to 278.9 feet	**Vertical Change**	-.52"	5 ft	5	REF		
44719	293.2 to 294.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
44736	295.5 to 315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
44737	318.6 to 328.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071651	E CLEVELAND AVE	MERCED ST	TULARE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44738	331.2 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
44720	339.4 to 340.4 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
44739	343.2 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **MERCED ST** **$97,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071505	E CLEVELAND AVE	N D ST	SIERRA ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44189	6.7 to 8.0 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	13	SF	$120	**$1,560**
44190	10.3 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	17	SF	$120	**$2,040**
44191	14.9 to 25.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	107	SF	$120	**$12,840**
44185	20.5 to 21.5 feet	**Vertical Change**	-.34"	10 ft	10	REF		
44192	26.1 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	636	SF	$120	**$76,320**
44197	90.5 to 117.7 feet	Key Note Segment		10 ft	272			
44187	116.4 to 117.4 feet	**Vertical Change**	-.26"	10 ft	10	REF		
44193	133.8 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	45	SF	$120	**$5,400**
44194	141.8 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	**$1,320**
44195	145.1 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	397	SF	$120	**$47,640**
44188	145.9 to 146.9 feet	**Vertical Change**	.4"	10 ft	10	REF		
44196	187.1 to 220.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	337	SF	$120	**$40,440**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **N D ST** **$187,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071613	E CLEVELAND AVE	N D ST	NEBRASKA AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44540	1.0 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
44541	6.8 to 28.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,020**
44542	28.8 to 30.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
44543	30.7 to 33.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
44544	35.0 to 37.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
44553	38.2 to 91.6 feet	Key Note Segment		5 ft	267			
44538	90.5 to 91.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
44545	91.6 to 92.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
44546	94.6 to 96.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
44554	97.7 to 123.5 feet	Key Note Segment		5 ft	129			
44547	129.0 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
44555	138.9 to 160.0 feet	Key Note Segment		5 ft	106			
44539	144.5 to 145.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
44548	160.0 to 164.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
44556	165.8 to 186.1 feet	Key Note Segment		5 ft	102			
44549	188.8 to 213.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
44550	215.0 to 221.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
44551	239.4 to 245.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
44552	246.5 to 247.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **N D ST** **$49,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071446	E CLEVELAND AVE	N LAKE ST	AUSTIN AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44066	0.8 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
44067	8.5 to 32.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
44068	33.9 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
44069	41.3 to 46.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
44118	47.3 to 90.8 feet	Key Note Segment		5 ft	218			
44060	48.2 to 49.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
44070	99.0 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
44071	110.0 to 112.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
44072	120.0 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
44073	133.7 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
44074	138.7 to 144.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
44075	146.7 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
44076	151.4 to 152.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
44077	153.4 to 188.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
44078	191.3 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44079	194.5 to 201.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
44080	202.2 to 209.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
44081	209.7 to 212.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
44119	213.1 to 251.8 feet	Key Note Segment		5 ft	194			
44061	231.3 to 232.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
44062	250.1 to 251.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
44082	253.8 to 263.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
44083	268.8 to 284.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
44084	288.0 to 310.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
44085	315.3 to 320.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
44086	322.3 to 326.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
44087	326.9 to 329.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
44063	329.0 to 330.0 feet	**Vertical Change**	1.16"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071446	E CLEVELAND AVE	N LAKE ST	AUSTIN AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44088	333.0 to 336.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
44089	336.8 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
44090	354.2 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
44091	374.1 to 386.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
44092	387.8 to 398.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
44093	398.9 to 404.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
44094	409.6 to 414.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
44095	416.6 to 417.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44096	423.1 to 444.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
44097	446.7 to 478.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	157	SF	$120	**$18,840**
44098	480.8 to 509.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,280**
44099	509.8 to 523.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
44100	529.4 to 532.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
44101	532.4 to 581.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	244	SF	$120	**$29,220**
44102	581.6 to 585.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
44103	588.3 to 602.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
44104	605.0 to 608.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
44105	608.9 to 614.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
44106	618.7 to 624.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
44107	627.8 to 634.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
44108	634.6 to 656.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
44120	659.8 to 687.8 feet	Key Note Segment		5 ft	140			
44109	687.8 to 693.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
44110	693.3 to 699.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
44111	699.3 to 705.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
44112	706.9 to 709.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
44113	709.9 to 778.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	342	SF	$120	**$41,040**
44114	780.8 to 787.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071446	E CLEVELAND AVE	N LAKE ST	AUSTIN AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44115	806.4 to 807.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
44065	810.6 to 811.6 feet	**Vertical Change**	.49"	5 ft	5	REF		
44116	811.5 to 813.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
44117	813.9 to 819.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **N LAKE ST** **$333,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071641	E CLEVELAND AVE	N LAKE ST	FRESNO ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44656	0.0 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
44655	4.2 to 5.2 feet	**Vertical Change**	.5"	5 ft	5	REF		
44674	22.8 to 72.9 feet	Key Note Segment		5 ft	251			
44657	72.9 to 86.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	69	SF	$40	**$2,780**
44658	90.5 to 91.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
44659	92.3 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
44660	110.5 to 114.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
44661	115.0 to 121.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
44662	129.8 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
44675	140.5 to 158.8 feet	Key Note Segment		5 ft	92			
44663	163.3 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
44676	177.8 to 197.0 feet	Key Note Segment		5 ft	96			
44664	197.0 to 216.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	98	SF	$40	**$3,920**
44665	219.8 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
44666	227.8 to 228.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
44677	228.9 to 247.3 feet	Key Note Segment		5 ft	92			
44667	247.3 to 263.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	82	SF	$40	**$3,260**
44678	264.7 to 285.6 feet	Key Note Segment		5 ft	105			
44668	285.6 to 287.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$340**
44669	288.4 to 294.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
44670	298.9 to 304.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
44671	307.8 to 314.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
44672	316.2 to 322.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
44673	339.3 to 347.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **N LAKE ST** **$70,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071500	E CLEVELAND AVE	NEBRASKA AVE	N D ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44168	0.0 to 8.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
44169	28.1 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
44170	31.4 to 44.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
44171	44.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
44172	53.7 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
44173	66.8 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
44174	73.8 to 85.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
44183	86.8 to 115.8 feet	Key Note Segment		5 ft	145			
44175	118.2 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
44184	126.7 to 154.2 feet	Key Note Segment		5 ft	137			
44167	143.5 to 144.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
44176	154.2 to 155.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
44177	155.9 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	223	SF	$120	**$26,700**
44178	201.0 to 203.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
44179	205.3 to 209.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
44180	210.4 to 228.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
44181	229.8 to 234.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
44182	237.3 to 248.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **NEBRASKA AVE** **$85,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071617	E CLEVELAND AVE	NEBRASKA AVE	DELLAVALLE AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44558	0.0 to 8.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
44557	1.1 to 2.1 feet	**Vertical Change**	.72"	5 ft	5	REF		
44559	8.2 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
44560	30.0 to 37.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
44561	37.4 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
44562	55.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	260	SF	$120	**$31,200**
44576	107.8 to 153.5 feet	Key Note Segment		5 ft	229			
44563	153.5 to 161.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	42	SF	$40	**$1,660**
44564	164.6 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
44565	172.6 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
44566	182.7 to 184.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
44567	184.3 to 196.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
44568	201.7 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
44569	220.8 to 224.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
44570	224.6 to 236.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
44571	238.8 to 241.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
44572	241.3 to 246.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,180**
44573	246.6 to 248.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
44574	268.7 to 275.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
44575	275.6 to 276.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **NEBRASKA AVE** **$98,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/NE	2106071538	E CLEVELAND AVE	OWENS ST	COUNTRY CLUB DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44310	0.4 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
44311	6.9 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
44312	16.3 to 32.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
44301	23.6 to 24.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
44313	32.7 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
44314	43.2 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
44315	88.7 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
44316	95.1 to 100.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
44317	104.1 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
44302	108.3 to 109.3 feet	**Vertical Change**	3.49"	5 ft	5	REF		
44318	124.9 to 132.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
44319	132.7 to 183.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	255	SF	$120	**$30,540**
44320	187.3 to 215.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	**$16,860**
44321	215.8 to 235.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
44322	235.4 to 243.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
44323	244.1 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
44362	266.3 to 293.9 feet	Key Note Segment		5 ft	138			
44324	295.0 to 301.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
44325	303.7 to 321.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
44326	321.5 to 325.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,340**
44327	327.8 to 335.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
44328	337.8 to 346.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
44329	349.3 to 420.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	356	SF	$120	**$42,660**
44330	423.3 to 427.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
44363	428.3 to 478.1 feet	Key Note Segment		5 ft	249			
44331	480.4 to 481.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
44332	482.6 to 492.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
44303	482.7 to 483.7 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/NE	2106071538	E CLEVELAND AVE	OWENS ST	COUNTRY CLUB DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44304	488.6 to 489.6 feet	Vertical Change	.27"	5 ft	5	REF		
44333	493.7 to 511.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	$10,500
44334	514.8 to 536.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	$12,960
44335	536.8 to 541.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
44336	542.8 to 584.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	210	SF	$120	$25,200
44337	587.4 to 595.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
44364	614.5 to 663.2 feet	Key Note Segment		5 ft	244			
44305	621.0 to 622.0 feet	Vertical Change	.28"	5 ft	5	REF		
44338	667.4 to 685.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	$10,620
44306	677.1 to 678.1 feet	Vertical Change	.29"	5 ft	5	REF		
44339	687.6 to 726.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	193	SF	$120	$23,160
44307	694.6 to 695.6 feet	Vertical Change	-.33"	5 ft	5	REF		
44340	726.8 to 730.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
44341	738.8 to 740.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
44342	743.3 to 749.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
44343	750.8 to 805.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	275	SF	$120	$33,000
44344	805.8 to 815.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
44345	818.1 to 828.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,060
44346	829.0 to 838.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
44347	841.6 to 845.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
44308	850.8 to 851.8 feet	Vertical Change	.7"	5 ft	5	SF	$75	$375
44348	851.9 to 862.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
44349	869.4 to 875.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
44350	884.8 to 918.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	$20,460
44351	921.1 to 922.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
44352	923.4 to 954.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	$18,900
44353	957.8 to 966.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
44354	968.5 to 989.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,480

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/NE	2106071538	E CLEVELAND AVE	OWENS ST	COUNTRY CLUB DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44355	990.0 to 993.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
44356	996.4 to 997.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
44357	998.2 to 1005.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
44358	1016.8 to 1018.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
44359	1022.5 to 1041.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
44360	1041.5 to 1048.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
44309	1047.6 to 1048.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
44361	1050.5 to 1054.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**

TOTAL COST FOR: N/NE *side of* **E CLEVELAND AVE** *Starting at:* **OWENS ST** **$466,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071554	E CLEVELAND AVE	OWENS ST	DAVIS ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44415	1.2 to 2.2 feet	Vertical Change	-.41"	5 ft	5	REF		
44419	2.1 to 8.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	$3,960
44416	4.7 to 5.7 feet	Vertical Change	-.37"	5 ft	5	REF		
44420	8.8 to 13.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,940
44421	13.9 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,280
44422	35.5 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$780
44423	37.8 to 43.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
44424	46.3 to 48.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
44425	50.2 to 58.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
44426	59.8 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
44427	64.7 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
44428	71.7 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	$17,460
44429	103.2 to 108.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,420
44430	111.3 to 116.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000
44431	120.0 to 167.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	237	SF	$120	$28,380
44432	167.3 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	$11,400
44433	186.8 to 190.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
44434	192.8 to 223.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	$18,300
44435	229.4 to 231.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
44436	232.3 to 238.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
44437	239.1 to 252.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	$7,920
44438	254.9 to 257.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
44439	257.0 to 267.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
44417	262.8 to 263.8 feet	Vertical Change	2.37"	5 ft	5	REF		
44440	269.3 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
44441	272.4 to 273.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
44442	274.1 to 297.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	$14,040
44418	281.9 to 282.9 feet	Vertical Change	3.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071554	E CLEVELAND AVE	OWENS ST	DAVIS ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44443	299.1 to 304.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
44444	306.8 to 320.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,460**
44445	321.3 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
44446	324.6 to 335.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
44447	339.3 to 351.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
44448	351.8 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
44449	357.8 to 360.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
44450	362.8 to 364.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
44451	367.0 to 374.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
44452	374.8 to 376.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **OWENS ST** **$188,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071523	E CLEVELAND AVE	PHILIP ST	DAVIS ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44273	5.0 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
44274	17.4 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
44275	37.8 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
44276	53.3 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	303	SF	$120	**$36,360**
44277	116.9 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
44278	141.2 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
44279	149.5 to 151.0 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **PHILIP ST** **$71,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201559	E CLEVELAND AVE	RAILROAD TRACKS	SHARON BVD	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41623	0.7 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,896**
41620	1.0 to 2.0 feet	**Vertical Change**	-.32"	8 ft	8	REF		
41624	5.8 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	80	SF	$120	**$9,600**
41651	6.7 to 10.4 feet		5.0-6.0%	8 ft	30			
41652	6.7 to 10.4 feet	Running Slope	5.0-6.0%	8 ft	30	SF	$120	**$3,552**
41653	10.4 to 13.0 feet		6.0-7.0%	8 ft	21			
41654	14.3 to 17.6 feet		5.0-6.0%	8 ft	26			
41625	18.8 to 20.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,152**
41626	21.2 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	86	SF	$120	**$10,368**
41627	33.5 to 70.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	295	SF	$120	**$35,424**
41628	70.7 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,336**
41629	79.6 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	47	SF	$120	**$5,664**
41630	88.3 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	420	SF	$120	**$50,400**
41631	142.9 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	101	SF	$120	**$12,096**
41632	158.3 to 163.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	43	SF	$120	**$5,184**
41633	168.3 to 179.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	91	SF	$120	**$10,944**
41634	182.6 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
41635	186.5 to 188.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	19	SF	$120	**$2,304**
41636	189.8 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	218	SF	$120	**$26,112**
41637	219.8 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	51	SF	$120	**$6,144**
41638	231.7 to 251.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	158	SF	$120	**$19,008**
41639	253.6 to 256.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	21	SF	$120	**$2,496**
41640	261.6 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,072**
41641	268.1 to 275.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	58	SF	$120	**$7,008**
41642	278.4 to 282.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	33	SF	$120	**$3,936**
41643	295.9 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	47	SF	$120	**$5,664**
41644	303.9 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	105	SF	$120	**$12,576**
41645	324.1 to 348.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	193	SF	$120	**$23,136**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201559	E CLEVELAND AVE	RAILROAD TRACKS	SHARON BVD	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41646	350.3 to 355.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,512**
41647	355.0 to 356.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,344**
41648	360.6 to 374.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	107	SF	$120	**$12,864**
41649	377.7 to 380.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	21	SF	$120	**$2,496**
41622	377.8 to 378.8 feet	**Vertical Change**	-.38"	8 ft	8	REF		
41650	381.4 to 385.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: SW *side of* **E CLEVELAND AVE** *Starting at:* **RAILROAD TRACKS** **$293,664.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071434	E CLEVELAND AVE	ROGERS ST	FRESNO ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44024	1.5 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,264**
44025	31.3 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
44026	34.4 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
44019	35.3 to 36.3 feet	**Vertical Change**	.44"	4 ft	4	REF		
44020	44.0 to 45.0 feet	**Vertical Change**	.31"	4 ft	4	REF		
44021	53.6 to 54.6 feet	**Vertical Change**	.37"	4 ft	4	REF		
44027	53.6 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	**$8,640**
44038	71.6 to 115.7 feet	Key Note Segment		4 ft	176			
44039	126.8 to 155.2 feet	Key Note Segment		4 ft	114			
44028	155.2 to 160.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	22	SF	$40	**$864**
44029	163.3 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
44030	178.4 to 191.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	51	SF	$120	**$6,096**
44031	209.7 to 214.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,160**
44032	215.7 to 219.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
44033	221.7 to 224.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
44034	227.6 to 249.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	88	SF	$120	**$10,560**
44035	249.6 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
44022	250.3 to 251.3 feet	**Vertical Change**	.43"	4 ft	4	REF		
44036	275.6 to 277.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	9	SF	$120	**$1,056**
44023	278.8 to 279.8 feet	**Vertical Change**	-.4"	4 ft	4	LF	$75	**$300**
44037	281.1 to 283.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **ROGERS ST** **$51,852.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071548	E CLEVELAND AVE	SHARON BVD	OWENS ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44370	1.2 to 23.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
44371	25.8 to 28.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
44372	30.6 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
44373	35.3 to 42.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
44374	42.4 to 50.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
44375	51.5 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
44376	60.0 to 65.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
44377	83.3 to 87.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
44378	90.5 to 93.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
44379	93.4 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
44380	105.3 to 116.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
44381	116.4 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
44382	144.3 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
44383	182.8 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
44384	197.7 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
44385	208.3 to 211.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
44386	211.3 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
44387	248.5 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
44388	255.9 to 263.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,500**
44407	263.4 to 287.9 feet	Key Note Segment		5 ft	123			
44365	271.8 to 272.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
44366	275.7 to 276.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
44389	287.9 to 314.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	134	SF	$40	**$5,340**
44408	315.3 to 338.4 feet	Key Note Segment		5 ft	116			
44390	338.4 to 360.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	110	SF	$40	**$4,400**
44409	360.4 to 382.8 feet	Key Note Segment		5 ft	112			
44391	383.9 to 395.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
44392	398.9 to 404.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071548	E CLEVELAND AVE	SHARON BVD	OWENS ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44410	404.2 to 434.8 feet	Key Note Segment		5 ft	153			
44367	433.0 to 434.0 feet	Vertical Change	.35"	5 ft	5	REF		
44393	434.8 to 446.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	57	SF	$40	$2,280
44394	446.7 to 460.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
44368	449.4 to 450.4 feet	Vertical Change	.48"	5 ft	5	REF		
44411	461.0 to 481.0 feet	Key Note Segment		5 ft	100			
44395	481.8 to 493.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,780
44396	495.8 to 525.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	$17,880
44412	526.3 to 553.7 feet	Key Note Segment		5 ft	137			
44397	556.5 to 565.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,280
44398	567.7 to 576.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,460
44413	576.8 to 596.3 feet	Key Note Segment		5 ft	98			
44399	596.3 to 602.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	$1,200
44400	603.0 to 615.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
44414	615.5 to 635.4 feet	Key Note Segment		5 ft	100			
44369	622.7 to 623.7 feet	Vertical Change	.33"	5 ft	5	REF		
44401	636.3 to 637.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
44402	637.9 to 661.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	$13,860
44403	664.5 to 665.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
44404	668.3 to 673.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
44405	693.3 to 696.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
44406	699.9 to 700.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **SHARON BVD** **$207,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071514	E CLEVELAND AVE	SIERRA ST	COLUMBIA ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44225	0.0 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**
44226	2.3 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
44227	24.0 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
44228	27.0 to 44.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,612**
44240	45.0 to 69.8 feet	Key Note Segment		5 ft	112			
44218	46.3 to 47.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
44229	71.2 to 74.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,512**
44219	71.7 to 72.7 feet	**Vertical Change**	3.39"	5 ft	5	REF		
44241	74.0 to 98.9 feet	Key Note Segment		5 ft	112			
44220	75.1 to 76.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
44221	97.6 to 98.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
44230	100.3 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
44222	110.8 to 111.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
44242	120.5 to 148.7 feet	Key Note Segment		5 ft	127			
44231	150.8 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,508**
44232	161.0 to 180.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,422**
44233	182.0 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
44234	190.8 to 196.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
44223	195.5 to 196.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
44243	198.6 to 222.3 feet	Key Note Segment		5 ft	107			
44235	222.9 to 227.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
44224	227.5 to 228.5 feet	**Vertical Change**	-.56"	5 ft	5	REF		
44236	232.5 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
44237	236.1 to 242.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,618**
44238	259.3 to 266.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,104**
44239	266.9 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **SIERRA ST** **$60,588.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071609	E CLEVELAND AVE	SIERRA ST	N D ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44520	0.6 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
44521	23.3 to 36.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,800**
44522	36.6 to 41.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
44523	45.2 to 47.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
44524	47.4 to 60.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
44525	62.8 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
44526	76.3 to 91.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
44527	94.8 to 99.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
44528	101.7 to 109.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
44529	112.6 to 119.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
44537	120.3 to 147.9 feet	Key Note Segment		5 ft	138			
44530	147.9 to 164.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	85	SF	$40	**$3,400**
44531	169.1 to 173.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
44532	175.4 to 198.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
44533	203.9 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
44534	217.0 to 218.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
44535	221.6 to 240.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,220**
44536	240.3 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **SIERRA ST** **$91,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071521	E CLEVELAND AVE	SONORA ST	PHILIP ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44263	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
44264	6.5 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
44265	28.6 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	234	SF	$120	**$28,020**
44262	71.7 to 72.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
44266	75.8 to 88.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
44267	89.5 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
44268	93.4 to 95.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
44269	96.6 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
44270	119.3 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
44271	129.2 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
44272	149.7 to 150.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **SONORA ST** **$69,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071602	E CLEVELAND AVE	SONORA ST	COLUMBIA ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44484	1.3 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
44485	24.9 to 31.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
44498	32.2 to 53.7 feet	Key Note Segment		5 ft	107			
44480	51.9 to 52.9 feet	**Vertical Change**	1.81"	5 ft	5	REF		
44486	53.7 to 71.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	89	SF	$40	**$3,580**
44487	71.6 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
44499	75.0 to 112.0 feet	Key Note Segment		5 ft	185			
44488	113.3 to 128.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
44489	128.5 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
44500	131.3 to 159.8 feet	Key Note Segment		5 ft	143			
44490	171.2 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
44501	183.8 to 205.2 feet	Key Note Segment		5 ft	107			
44491	205.2 to 212.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,520**
44492	218.5 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
44493	228.2 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
44494	246.3 to 251.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
44495	252.0 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
44496	273.3 to 275.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
44483	277.7 to 278.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
44497	278.5 to 280.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **SONORA ST** **$49,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071528	E CLEVELAND AVE	TORONADO DR	OWENS ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44293	0.0 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
44294	6.8 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
44295	11.4 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
44296	13.3 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
44297	20.3 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
44298	47.3 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	277	SF	$120	**$33,180**
44292	101.7 to 102.7 feet	**Vertical Change**	.8"	5 ft	5	REF		
44299	102.8 to 138.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	180	SF	$120	**$21,600**
44300	140.3 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: N *side of* **E CLEVELAND AVE** *Starting at:* **TORONADO DR** **$82,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091645	E CLEVELAND AVE	TULARE ST	MEADOWS MOBLIE HOME PARK	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131002	0.3 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
131003	11.1 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
131004	26.8 to 27.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
131005	30.2 to 35.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
131006	36.5 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,820**
130997	37.2 to 38.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
130998	63.1 to 64.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
131007	75.7 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
131008	85.3 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
131009	107.6 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
131010	142.0 to 143.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
131011	144.7 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
131012	157.3 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,140**
131013	191.5 to 196.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
131014	202.7 to 227.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,640**
131015	228.3 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
131016	233.8 to 237.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
131017	237.8 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131018	243.4 to 247.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
131019	247.5 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
131020	252.8 to 255.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
131021	255.5 to 261.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131022	264.8 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
131023	280.0 to 281.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
131024	283.8 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
131025	305.8 to 330.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
131026	331.9 to 339.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
131027	340.8 to 352.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091645	E CLEVELAND AVE	TULARE ST	MEADOWS MOBLIE HOME PARK	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131028	355.8 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
130999	356.2 to 357.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
131029	367.6 to 378.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
131030	383.0 to 384.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
131031	385.8 to 389.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
131032	394.4 to 416.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
131000	408.5 to 409.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
131001	416.2 to 417.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
131034	416.4 to 464.4 feet	Key Note Segment		5 ft	240			
131033	464.6 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: S *side of* **E CLEVELAND AVE** *Starting at:* **TULARE ST** **$192,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071349	E CLEVELAND AVE	TULARE ST	MERCED ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43707	0.8 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,346**
43708	26.8 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**
43702	26.9 to 27.9 feet	**Vertical Change**	1.46"	5 ft	5	REF		
43703	28.8 to 29.8 feet	**Vertical Change**	2.66"	5 ft	5	REF		
43704	32.5 to 36.0 feet	**Vertical Change**	.29"	5 ft	16	LF	$75	**$1,181**
43709	45.7 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
43710	53.5 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,970**
43706	56.2 to 57.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
43711	61.3 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
43712	64.5 to 73.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,698**
43713	73.2 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
43714	81.4 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
43715	90.7 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,670**
43716	101.2 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,374**
43717	109.5 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,754**
43718	130.8 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
43719	132.9 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,856**
43720	152.4 to 158.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
43721	161.5 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
43722	173.3 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
43723	180.4 to 187.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,672**
43724	187.8 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
43725	193.3 to 210.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,126**
43728	210.2 to 241.0 feet	Key Note Segment		5 ft	139			
43726	245.4 to 251.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,132**
43727	251.6 to 253.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**

TOTAL COST FOR: W *side of* **E CLEVELAND AVE** *Starting at:* **TULARE ST** **$75,701.25**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202090940	E ELLIS ST	1505 E ELLIS ST	1505 E ELLIS ST	19

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128360	0.8 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
128361	4.7 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
128358	12.5 to 13.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
128359	28.1 to 29.1 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **E ELLIS ST** *Starting at:* **1505 E ELLIS ST** **$5,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202090941	E ELLIS ST	1505 E ELLIS ST	1505 E ELLIS ST	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128365	0.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
128362	4.7 to 5.7 feet	**Vertical Change**	.54"	5 ft	5	REF		
128366	29.8 to 35.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
128367	35.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**
128363	39.1 to 40.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
128368	76.9 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
128369	91.3 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
128370	121.9 to 123.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
128371	124.1 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
128364	141.6 to 142.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
128372	145.0 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **E ELLIS ST** *Starting at:* **1505 E ELLIS ST** **$57,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071008	E ELLIS ST	1995 N LAKE ST	EAGLE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122199	0.8 to 6.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
122200	7.7 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
122201	9.3 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
122197	15.5 to 16.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
122202	23.9 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
122203	40.3 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
122204	48.4 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
122205	65.2 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
122206	83.4 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
122198	101.8 to 102.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **1995 N LAKE ST** **$28,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021207	E ELLIS ST	2001 N LAKE ST	N LAKE ST	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117947	0.3 to 25.7 feet	Key Note Segment		5 ft	127			
117944	34.8 to 35.8 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
117948	43.1 to 44.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117945	63.3 to 64.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
117946	63.6 to 69.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: N *side of* **E ELLIS ST** *Starting at:* **2001 N LAKE ST** **$4,074.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202090944	E ELLIS ST	27411 E ELLIS ST	1505 E ELLIS ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128381	3.2 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
128382	32.8 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
128383	41.3 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
128373	115.2 to 116.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
128384	116.5 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
128374	119.1 to 120.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
128385	122.9 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
128386	143.6 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
128375	153.4 to 154.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
128387	181.3 to 189.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,720**
128388	202.9 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
128376	204.3 to 205.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
128389	227.3 to 229.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
128377	230.2 to 231.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
128390	233.1 to 237.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
128391	239.3 to 242.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
128392	242.8 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
128393	263.8 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
128378	269.0 to 270.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
128394	291.8 to 301.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
128379	294.8 to 295.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
128395	304.8 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
128380	316.3 to 317.3 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
128396	319.2 to 323.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
128397	323.2 to 325.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**

TOTAL COST FOR: N *side of* **E ELLIS ST** *Starting at:* **27411 E ELLIS ST** **$75,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081446	E ELLIS ST	ADAMS AVE	CHAPIN ST	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127367	0.0 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
127368	8.2 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	307	SF	$120	**$36,780**
127362	9.7 to 10.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
127369	73.4 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
127370	101.9 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
127371	127.5 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
127372	146.3 to 168.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,140**
127363	157.7 to 158.7 feet	**Vertical Change**	1"	5 ft	5	REF		
127373	173.2 to 176.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
127374	179.1 to 187.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
127375	191.4 to 254.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	315	SF	$120	**$37,740**
127364	217.1 to 218.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
127376	254.3 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
127377	280.4 to 281.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
127378	281.9 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
127379	301.5 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
127380	314.8 to 331.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
127381	375.5 to 386.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
127366	383.4 to 384.4 feet	**Vertical Change**	3.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **ADAMS AVE** **$175,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071020	E ELLIS ST	EAGLE DR	1141 E ELLIS ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122304	0.4 to 1.4 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
122305	26.9 to 27.9 feet	Vertical Change	2.81"	5 ft	5	SF	$75	**$375**
122307	33.6 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,500**
122308	112.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
122309	129.0 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
122310	134.7 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
122311	153.8 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
122312	177.8 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
122306	190.9 to 191.9 feet	Vertical Change	1.28"	5 ft	5	REF		
122313	205.0 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
122314	234.9 to 239.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
122315	246.9 to 251.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
122316	256.5 to 270.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **EAGLE DR** **$100,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202090939	E ELLIS ST	ERICHO DR	1505 E ELLIS ST	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128346	0.9 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,880**
128334	15.8 to 16.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
128347	50.3 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
128335	57.6 to 58.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
128348	64.5 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
128349	73.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
128336	80.9 to 81.9 feet	**Vertical Change**	1.69"	5 ft	5	REF		
128350	82.8 to 100.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
128337	83.6 to 84.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
128351	100.3 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	254	SF	$120	**$30,420**
128338	100.6 to 101.6 feet	**Vertical Change**	.79"	5 ft	5	REF		
128339	135.0 to 136.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
128340	139.6 to 140.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
128341	148.0 to 149.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
128352	154.1 to 158.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
128353	160.5 to 164.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
128342	161.4 to 162.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
128354	168.0 to 180.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
128355	180.8 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
128343	186.7 to 187.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
128356	186.8 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
128344	200.0 to 201.0 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
128357	202.3 to 213.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
128345	208.6 to 209.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **E ELLIS ST** *Starting at:* **ERICHO DR** **$102,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071229	E ELLIS ST	MERCED ST	TALISE AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123217	0.0 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
123218	6.3 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
123219	10.7 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
123220	18.9 to 22.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
123203	24.5 to 25.5 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
123221	26.6 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
123222	31.3 to 35.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,460
123223	40.8 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	$7,920
123224	56.0 to 57.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
123225	60.8 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
123226	78.8 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
123204	83.3 to 84.3 feet	Vertical Change	2.84"	5 ft	5	SF	$75	$375
123205	100.1 to 101.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
123227	103.3 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
123228	120.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
123229	129.4 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
123230	137.8 to 149.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	$6,840
123231	149.6 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	$18,120
123206	162.5 to 163.5 feet	Vertical Change	-.26"	5 ft	5	REF		
123207	173.3 to 174.3 feet	Vertical Change	.3"	5 ft	5	REF		
123232	179.8 to 188.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
123208	187.2 to 188.2 feet	Vertical Change	.29"	5 ft	5	REF		
123233	192.4 to 202.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	$6,240
123234	203.7 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
123235	206.9 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
123209	210.5 to 211.5 feet	Vertical Change	.29"	5 ft	5	REF		
123236	212.2 to 213.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
123237	217.3 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071229	E ELLIS ST	MERCED ST	TALISE AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123238	233.3 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
123239	236.9 to 263.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,720**
123240	263.1 to 297.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
123210	286.9 to 287.9 feet	**Vertical Change**	.71"	5 ft	5	REF		
123241	300.3 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
123242	306.3 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
123243	338.3 to 350.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
123211	349.9 to 350.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
123244	350.5 to 377.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	135	SF	$120	**$16,140**
123212	361.0 to 362.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
123245	378.5 to 415.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,900**
123246	419.5 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
123247	422.8 to 428.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
123248	431.8 to 432.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
123249	435.8 to 441.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
123213	439.9 to 440.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
123250	446.0 to 447.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
123251	448.9 to 451.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
123252	454.4 to 461.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
123253	464.3 to 473.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
123214	474.4 to 475.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
123215	484.4 to 485.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
123254	491.9 to 495.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
123255	499.6 to 506.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
123256	516.8 to 525.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
123216	533.2 to 534.2 feet	**Vertical Change**	1.16"	5 ft	5	REF		
123257	533.3 to 538.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
123258	543.3 to 549.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071229	E ELLIS ST	MERCED ST	TALISE AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **E ELLIS ST**	*Starting at:* **MERCED ST**					**$234,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071006	E ELLIS ST	N LAKE ST	1995 E ELLIS ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122180	0.2 to 27.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,200**
122181	27.2 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	264	SF	$120	**$31,740**
122182	80.8 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
122179	85.6 to 86.6 feet	**Vertical Change**	-.37"	5 ft	5	REF		
122183	89.5 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
122184	98.3 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
122185	107.0 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
122186	111.6 to 114.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
122187	117.0 to 128.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
122188	130.5 to 145.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
122189	147.8 to 152.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,580**
122190	153.0 to 158.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,300**
122191	158.8 to 164.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
122196	164.6 to 193.8 feet	Key Note Segment		5 ft	146			
122192	194.5 to 232.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	188	SF	$40	**$7,500**
122193	232.9 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
122194	241.1 to 246.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
122195	249.8 to 252.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **N LAKE ST** **$105,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071640	E ELLIS ST	TALISE AVE	ZAPATA ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125330	0.0 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
125331	6.4 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
125332	17.3 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**
125320	28.2 to 29.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
125333	60.5 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
125321	72.1 to 73.1 feet	**Vertical Change**	.5"	5 ft	5	REF		
125334	90.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125335	92.8 to 99.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
125336	111.4 to 119.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
125337	124.3 to 126.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
125338	129.2 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
125339	133.0 to 141.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
125340	141.3 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
125322	146.3 to 147.3 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
125341	153.4 to 154.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
125342	160.6 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
125343	169.2 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125344	174.5 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
125323	184.8 to 185.8 feet	**Vertical Change**	2.21"	5 ft	5	SF	$75	**$375**
125345	201.3 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
125324	201.6 to 202.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
125346	206.3 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
125347	217.9 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
125348	232.2 to 240.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
125325	236.8 to 237.8 feet	**Vertical Change**	2.12"	5 ft	5	REF		
125349	240.7 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
125350	246.8 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125351	252.5 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071640	E ELLIS ST	TALISE AVE	ZAPATA ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125352	257.1 to 263.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
125353	266.8 to 277.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
125354	277.9 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
125355	289.6 to 294.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
125356	296.9 to 298.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
125357	299.9 to 304.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
125326	304.0 to 305.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
125358	305.4 to 311.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
125359	311.8 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125360	315.9 to 329.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
125361	330.4 to 335.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
125362	335.2 to 337.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
125363	339.1 to 348.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
125327	339.9 to 340.9 feet	**Vertical Change**	2.21"	5 ft	5	REF		
125328	350.5 to 351.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
125364	351.8 to 354.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
125365	357.2 to 360.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
125366	362.6 to 367.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
125367	367.8 to 369.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125368	372.8 to 374.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
125369	374.0 to 375.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
125329	378.3 to 379.3 feet	**Vertical Change**	1.79"	5 ft	5	REF		
125370	378.3 to 388.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
125371	389.8 to 391.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
125372	391.8 to 393.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
125373	393.8 to 401.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
125374	402.1 to 404.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **TALISE AVE** **$152,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081138	E ELLIS ST	ZAPATA ST	ADAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125896	2.8 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
125897	39.2 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
125898	46.3 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
125869	48.6 to 49.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
125899	48.6 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
125900	52.9 to 56.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
125901	65.6 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
125870	86.4 to 87.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
125902	86.5 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
125903	96.5 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
125904	100.8 to 111.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
125871	104.7 to 105.7 feet	**Vertical Change**	1.19"	5 ft	5	REF		
125905	112.1 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
125872	115.6 to 116.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
125906	155.1 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
125907	159.6 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
125908	164.4 to 192.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
125909	195.3 to 199.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
125873	197.3 to 198.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
125910	199.1 to 200.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125911	205.0 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125874	210.0 to 211.0 feet	**Vertical Change**	2.24"	5 ft	5	SF	$75	**$375**
125875	213.2 to 214.2 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
125876	229.3 to 230.3 feet	**Vertical Change**	2.24"	5 ft	5	SF	$75	**$375**
125912	234.7 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
125913	239.2 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
125914	255.1 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
125877	272.4 to 273.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081138	E ELLIS ST	ZAPATA ST	ADAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125915	275.0 to 279.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
125878	277.0 to 278.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125916	285.1 to 294.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
125917	323.8 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
125918	329.1 to 331.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
125919	350.8 to 355.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
125920	359.3 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125921	365.0 to 368.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
125922	397.8 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125923	420.9 to 430.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
125924	433.8 to 442.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
125925	442.7 to 445.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
125926	446.5 to 452.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
125927	455.3 to 464.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
125879	456.9 to 457.9 feet	**Vertical Change**	.56"	5 ft	5	REF		
125928	468.4 to 481.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
125929	481.9 to 485.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
125880	485.3 to 486.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
125930	485.5 to 492.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
125881	491.1 to 492.1 feet	**Vertical Change**	1.45"	5 ft	5	REF		
125931	493.5 to 495.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
125932	497.4 to 504.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
125882	503.2 to 504.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
125933	507.0 to 509.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
125934	510.8 to 516.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
125935	516.5 to 519.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
125883	520.2 to 523.3 feet	**Vertical Change**	.36"	5 ft	15	LF	$75	**$1,163**
125936	521.6 to 522.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081138	E ELLIS ST	ZAPATA ST	ADAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125937	527.0 to 528.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
125938	530.3 to 532.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
125939	535.5 to 539.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
125940	541.8 to 558.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
125884	549.4 to 550.4 feet	**Vertical Change**	.89"	5 ft	5	REF		
125941	558.8 to 566.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
125942	568.8 to 588.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,700**
125885	571.4 to 572.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
125886	576.7 to 577.7 feet	**Vertical Change**	2.18"	5 ft	5	REF		
125887	582.2 to 583.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
125943	590.8 to 592.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
125944	595.2 to 606.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
125888	601.5 to 602.5 feet	**Vertical Change**	3.35"	5 ft	5	REF		
125945	607.8 to 617.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
125946	618.3 to 629.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
125889	622.3 to 623.3 feet	**Vertical Change**	3.31"	5 ft	5	REF		
125947	634.8 to 636.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
125948	636.8 to 641.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125949	642.4 to 643.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
125950	646.3 to 654.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
125951	655.1 to 659.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
125952	663.3 to 677.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
125890	668.6 to 669.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
125891	677.4 to 678.4 feet	**Vertical Change**	3.06"	5 ft	5	REF		
125953	680.0 to 686.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
125954	686.2 to 687.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
125955	691.7 to 697.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
125956	697.0 to 702.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081138	E ELLIS ST	ZAPATA ST	ADAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125993	703.1 to 722.4 feet	Key Note Segment		5 ft	97			
125957	722.4 to 723.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300
125958	729.0 to 730.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
125994	748.4 to 770.1 feet	Key Note Segment		5 ft	109			
125959	770.4 to 771.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$280
125892	778.8 to 779.8 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
125960	784.7 to 787.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
125893	801.2 to 802.2 feet	Vertical Change	.88"	5 ft	5	REF		
125961	801.3 to 804.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
125962	819.1 to 835.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,540
125963	837.3 to 841.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
125964	846.5 to 866.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,760
125965	868.3 to 871.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
125966	875.6 to 876.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
125894	878.2 to 879.2 feet	Vertical Change	.27"	5 ft	5	REF		
125967	879.1 to 906.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	139	SF	$120	$16,680
125968	910.0 to 928.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	$10,860
125969	928.3 to 935.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
125970	938.3 to 939.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
125971	941.2 to 954.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
125972	957.1 to 961.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
125973	965.9 to 970.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
125974	978.3 to 979.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
125975	981.7 to 982.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
125976	983.5 to 988.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
125977	988.8 to 995.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,200
125895	993.9 to 994.9 feet	Vertical Change	.46"	5 ft	5	REF		
125978	998.5 to 1005.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081138	E ELLIS ST	ZAPATA ST	ADAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125979	1005.4 to 1011.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
125980	1013.8 to 1018.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125981	1019.1 to 1025.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
125982	1034.3 to 1038.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
125983	1039.5 to 1047.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
125984	1047.5 to 1048.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
125985	1056.4 to 1082.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
125986	1083.8 to 1088.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
125987	1090.4 to 1092.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
125988	1092.5 to 1094.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125989	1100.4 to 1106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
125990	1106.6 to 1110.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
125991	1110.6 to 1113.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
125992	1115.8 to 1121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: S *side of* **E ELLIS ST** *Starting at:* **ZAPATA ST** **$369,887.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081204	E KENNEDY ST	ADAMS AVE	JERICHO DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126211	0.0 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
126212	21.5 to 33.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
126213	33.5 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
126214	41.2 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	230	SF	$120	**$27,540**
126207	64.0 to 65.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
126215	94.3 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
126216	115.3 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
126217	123.0 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
126218	130.5 to 135.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
126219	135.8 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
126220	148.8 to 170.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$13,020**
126221	175.9 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
126222	186.9 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
126223	196.5 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
126224	221.3 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
126225	235.3 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
126226	242.3 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
126227	291.2 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
126228	324.2 to 326.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
126208	329.1 to 330.1 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
126229	332.6 to 334.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
126230	339.9 to 344.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
126231	348.8 to 356.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
126209	353.1 to 354.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
126232	358.7 to 359.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126233	362.0 to 366.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
126234	367.3 to 373.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
126235	376.0 to 387.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081204	E KENNEDY ST	ADAMS AVE	JERICHO DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126236	388.2 to 394.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
126237	396.3 to 397.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126238	405.8 to 412.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
126239	415.3 to 419.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
126240	421.1 to 429.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
126241	432.2 to 439.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
126242	439.6 to 464.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
126243	467.7 to 546.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	393	SF	$120	**$47,100**
126210	471.4 to 472.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
126244	548.3 to 554.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
126245	556.8 to 606.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	251	SF	$120	**$30,060**
126246	611.4 to 656.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	228	SF	$120	**$27,300**
126247	657.1 to 693.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
126248	695.6 to 710.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
126249	710.2 to 716.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
126250	716.9 to 737.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**

TOTAL COST FOR: N *side of* **E KENNEDY ST** *Starting at:* **ADAMS AVE** **$332,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081503	E KENNEDY ST	CHAPIN ST	ADAMS AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127465	1.8 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
127466	21.4 to 22.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
127467	22.7 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
127468	31.3 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,100**
127469	42.1 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,320**
127470	72.6 to 126.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	267	SF	$120	**$32,040**
127471	129.8 to 133.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
127472	137.0 to 153.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
127460	140.2 to 141.2 feet	**Vertical Change**	.92"	5 ft	5	REF		
127473	156.6 to 165.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
127461	164.1 to 165.1 feet	**Vertical Change**	1.53"	5 ft	5	REF		
127474	165.4 to 206.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	204	SF	$120	**$24,480**
127462	194.3 to 195.3 feet	**Vertical Change**	2.23"	5 ft	5	REF		
127475	208.7 to 224.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
127463	221.9 to 222.9 feet	**Vertical Change**	1.27"	5 ft	5	REF		
127476	226.4 to 251.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,060**
127477	253.9 to 272.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,340**
127478	275.0 to 277.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
127479	277.8 to 294.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
127480	298.8 to 313.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
127481	317.2 to 337.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,060**
127464	335.7 to 336.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
127482	338.1 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
127483	341.8 to 352.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
127484	354.6 to 358.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
127485	360.2 to 369.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
127486	371.8 to 380.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: N *side of* **E KENNEDY ST** *Starting at:* **CHAPIN ST** **$199,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071157	E KENNEDY ST	JERICHO DR	JESSE DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122988	0.3 to 15.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
122979	12.0 to 13.0 feet	**Vertical Change**	3.02"	5 ft	5	REF		
122989	16.3 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	194	SF	$120	**$23,280**
122990	59.6 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
122991	74.7 to 81.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
122992	83.5 to 115.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**
122993	115.7 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
122994	144.3 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
122995	156.6 to 218.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	311	SF	$120	**$37,260**
122996	218.7 to 223.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
122997	223.1 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
122998	235.7 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122999	243.5 to 249.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
123000	250.9 to 257.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
123001	258.3 to 262.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
123002	262.7 to 271.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
123050	273.1 to 288.6 feet	Key Note Segment		5 ft	78			
123003	293.9 to 295.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
123004	295.6 to 297.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,260**
123005	298.9 to 303.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
123006	305.2 to 321.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
123007	321.8 to 331.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	46	SF	$120	**$5,520**
123008	331.4 to 335.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
123009	340.4 to 367.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	138	SF	$120	**$16,500**
122980	363.2 to 364.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
123010	367.9 to 377.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
123011	380.7 to 394.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
123012	396.1 to 409.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071157	E KENNEDY ST	JERICHO DR	JESSE DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123013	414.9 to 421.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
123014	424.1 to 442.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	91	SF	$120	**$10,860**
123015	443.7 to 446.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
123016	449.9 to 450.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
123017	450.9 to 459.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,340**
123018	460.3 to 465.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
123019	468.0 to 472.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
123020	473.0 to 477.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
123021	477.6 to 498.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
123022	501.5 to 517.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
123023	517.6 to 518.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
122982	529.5 to 530.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
123024	547.8 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
123025	565.7 to 570.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,060**
123051	572.8 to 589.8 feet	Key Note Segment		5 ft	85			
123026	599.8 to 604.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
123027	605.5 to 606.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
123028	609.1 to 611.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
123029	619.3 to 623.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
123052	623.8 to 642.3 feet	Key Note Segment		5 ft	93			
122983	625.2 to 626.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
123030	644.1 to 676.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
123053	676.6 to 694.2 feet	Key Note Segment		5 ft	88			
123031	696.3 to 697.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
123054	728.8 to 745.8 feet	Key Note Segment		5 ft	85			
123032	749.4 to 752.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
123033	752.8 to 758.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
123034	758.7 to 760.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071157	E KENNEDY ST	JERICHO DR	JESSE DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123035	762.4 to 763.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
122984	765.3 to 766.3 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
123036	768.3 to 780.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
123055	781.5 to 798.6 feet	Key Note Segment		5 ft	86			
123037	801.6 to 806.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
123056	807.6 to 824.8 feet	Key Note Segment		5 ft	86			
122985	818.1 to 819.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
123038	832.8 to 858.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,300**
122986	833.1 to 834.1 feet	**Vertical Change**	1.57"	5 ft	5	REF		
122987	849.2 to 850.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
123057	858.3 to 876.3 feet	Key Note Segment		5 ft	90			
123039	878.8 to 886.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
123040	887.3 to 897.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
123041	899.9 to 901.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
123042	903.8 to 905.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
123043	905.8 to 907.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
123044	908.8 to 911.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
123058	911.5 to 928.8 feet	Key Note Segment		5 ft	87			
123045	929.9 to 931.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
123046	932.9 to 936.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
123047	936.7 to 942.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
123048	945.3 to 947.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
123049	948.7 to 950.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **E KENNEDY ST** *Starting at:* **JERICHO DR** **$358,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071202	E KENNEDY ST	JESSE DR	MERCED ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123059	0.2 to 1.2 feet	Vertical Change	-.29"	5 ft	5	REF		
123068	0.4 to 1.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
123069	5.8 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
123085	19.6 to 36.4 feet	Key Note Segment		5 ft	84			
123060	60.6 to 61.6 feet	Vertical Change	1.12"	5 ft	5	SF	$75	$375
123086	72.2 to 90.6 feet	Key Note Segment		5 ft	92			
123070	93.0 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
123071	94.3 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
123087	97.2 to 115.9 feet	Key Note Segment		5 ft	94			
123072	121.3 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
123073	126.9 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,660
123061	142.6 to 143.6 feet	Vertical Change	.59"	5 ft	5	REF		
123062	161.8 to 162.8 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
123074	168.7 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
123088	174.8 to 192.7 feet	Key Note Segment		5 ft	90			
123063	183.6 to 184.6 feet	Vertical Change	.32"	5 ft	5	REF		
123075	192.8 to 193.8 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	5	SF	$40	$200
123076	196.2 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
123064	202.6 to 203.6 feet	Vertical Change	2.79"	5 ft	5	SF	$75	$375
123065	210.2 to 211.2 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
123077	211.5 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,500
123066	214.4 to 215.4 feet	Vertical Change	.33"	5 ft	5	REF		
123089	229.0 to 246.3 feet	Key Note Segment		5 ft	87			
123067	266.7 to 267.7 feet	Vertical Change	.73"	5 ft	5	SF	$75	$375
123078	270.9 to 280.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
123090	280.1 to 298.0 feet	Key Note Segment		5 ft	89			
123079	300.8 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
123091	306.3 to 324.3 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071202	E KENNEDY ST	JESSE DR	MERCED ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123080	327.9 to 346.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
123081	347.8 to 356.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
123082	356.7 to 358.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
123092	358.4 to 377.1 feet	Key Note Segment		5 ft	94			
123083	378.5 to 379.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
123084	379.5 to 401.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**

TOTAL COST FOR: N *side of* **E KENNEDY ST** *Starting at:* **JESSE DR** **$73,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071058	E KENNEDY ST	MERCED ST	N LAKE ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122624	2.2 to 34.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	127	SF	$120	**$15,264**
122673	34.0 to 59.8 feet	Key Note Segment		4 ft	103			
122593	49.5 to 50.5 feet	**Vertical Change**	.3"	4 ft	4	REF		
122625	60.8 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
122626	71.2 to 79.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,080**
122627	80.3 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	79	SF	$120	**$9,504**
122595	101.6 to 102.6 feet	**Vertical Change**	.92"	4 ft	4	SF	$75	**$300**
122628	104.6 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$2,976**
122674	112.3 to 121.3 feet	Key Note Segment		4 ft	36			
122629	121.9 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
122630	129.4 to 132.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**
122631	132.0 to 135.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
122632	143.3 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
122675	154.8 to 175.8 feet	Key Note Segment		4 ft	84			
122596	155.0 to 156.0 feet	**Vertical Change**	.27"	4 ft	4	REF		
122633	175.8 to 178.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	10	SF	$40	**$384**
122634	185.5 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
122635	190.5 to 192.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
122636	205.3 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,200**
122597	205.9 to 206.9 feet	**Vertical Change**	.29"	4 ft	4	REF		
122676	220.3 to 246.3 feet	Key Note Segment		4 ft	104			
122598	247.0 to 248.0 feet	**Vertical Change**	-.34"	4 ft	4	REF		
122637	247.8 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	68	SF	$120	**$8,160**
122638	268.8 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
122639	283.2 to 287.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
122677	292.9 to 318.1 feet	Key Note Segment		4 ft	101			
122640	326.0 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
122599	332.6 to 333.6 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071058	E KENNEDY ST	MERCED ST	N LAKE ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122641	353.5 to 355.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
122600	355.1 to 356.1 feet	**Vertical Change**	1.2"	4 ft	4	REF		
122678	356.8 to 371.3 feet	Key Note Segment		4 ft	58			
122642	372.8 to 374.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
122643	374.1 to 376.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
122679	376.1 to 392.7 feet	Key Note Segment		4 ft	66			
122601	383.6 to 384.6 feet	**Vertical Change**	.31"	4 ft	4	REF		
122602	390.2 to 391.2 feet	**Vertical Change**	.29"	4 ft	4	REF		
122603	393.3 to 394.3 feet	**Vertical Change**	-.33"	4 ft	4	REF		
122644	393.8 to 395.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
122645	402.8 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
122646	408.3 to 415.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
122604	413.3 to 414.3 feet	**Vertical Change**	.48"	4 ft	4	REF		
122680	415.8 to 430.1 feet	Key Note Segment		4 ft	57			
122647	434.9 to 443.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,032**
122648	443.7 to 450.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
122681	453.5 to 468.8 feet	Key Note Segment		4 ft	61			
122649	477.3 to 478.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
122650	483.8 to 507.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	95	SF	$120	**$11,424**
122605	509.1 to 510.1 feet	**Vertical Change**	.39"	4 ft	4	REF		
122651	509.3 to 520.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	46	SF	$120	**$5,520**
122652	520.8 to 527.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
122606	522.8 to 523.8 feet	**Vertical Change**	.37"	4 ft	4	REF		
122682	527.8 to 559.2 feet	Key Note Segment		4 ft	126			
122607	560.5 to 561.5 feet	**Vertical Change**	.35"	4 ft	4	REF		
122653	560.9 to 573.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,192**
122608	563.5 to 564.5 feet	**Vertical Change**	1.89"	4 ft	4	REF		
122609	568.3 to 569.3 feet	**Vertical Change**	2.53"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071058	E KENNEDY ST	MERCED ST	N LAKE ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122683	576.3 to 591.8 feet	Key Note Segment		4 ft	62			
122610	579.5 to 580.5 feet	Vertical Change	1.5"	4 ft	4	REF		
122611	592.2 to 593.2 feet	Vertical Change	.28"	4 ft	4	REF		
122654	593.8 to 596.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,344**
122612	596.5 to 597.5 feet	Vertical Change	-.26"	4 ft	4	REF		
122613	598.5 to 599.5 feet	Vertical Change	.26"	4 ft	4	LF	$75	**$300**
122614	601.2 to 602.2 feet	Vertical Change	2.4"	4 ft	4	SF	$75	**$300**
122684	601.8 to 615.3 feet	Key Note Segment		4 ft	54			
122615	615.2 to 616.2 feet	Vertical Change	.27"	4 ft	4	REF		
122616	616.9 to 617.9 feet	Vertical Change	-.35"	4 ft	4	LF	$75	**$300**
122655	618.6 to 632.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
122617	619.8 to 620.8 feet	Vertical Change	.38"	4 ft	4	REF		
122656	636.3 to 652.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
122657	656.2 to 666.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,088**
122618	657.3 to 658.3 feet	Vertical Change	-.26"	4 ft	4	REF		
122619	662.8 to 663.8 feet	Vertical Change	2"	4 ft	4	REF		
122685	669.7 to 685.1 feet	Key Note Segment		4 ft	62			
122620	674.2 to 675.2 feet	Vertical Change	2.63"	4 ft	4	REF		
122658	688.2 to 694.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
122686	696.8 to 723.6 feet	Key Note Segment		4 ft	107			
122659	723.6 to 725.1 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	6	SF	$40	**$240**
122660	732.7 to 734.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
122661	738.7 to 745.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
122662	746.8 to 754.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	**$3,456**
122663	754.7 to 756.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
122664	760.1 to 766.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
122621	762.1 to 763.1 feet	Vertical Change	.43"	4 ft	4	REF		
122665	766.7 to 769.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071058	E KENNEDY ST	MERCED ST	N LAKE ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122622	770.7 to 771.7 feet	Vertical Change	-.35"	4 ft	4	LF	$75	$300
122666	772.1 to 774.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	$1,152
122667	774.5 to 776.1 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	$768
122687	778.3 to 808.3 feet	Key Note Segment		4 ft	120			
122668	808.3 to 810.0 feet	Cross Slope (Driveway)	6.0-7.0%	4 ft	7	SF	$40	$272
122669	812.9 to 826.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	56	SF	$120	$6,720
122623	826.5 to 827.5 feet	Vertical Change	.56"	4 ft	4	REF		
122670	828.6 to 829.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$528
122671	830.3 to 831.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$672
122688	833.2 to 834.2 feet	Protruding Object	48"	4 ft	4	JOB	$99	$99
122672	842.3 to 846.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	17	SF	$120	$2,064

TOTAL COST FOR: N *side of* **E KENNEDY ST** *Starting at:* **MERCED ST** **$161,579.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071108	E KENNEDY ST	N LAKE ST	TULARE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122732	0.1 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
122689	2.2 to 3.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
122733	15.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
122734	45.3 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122735	50.2 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
122690	50.8 to 51.8 feet	**Vertical Change**	2.9"	5 ft	5	REF		
122691	61.8 to 62.8 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
122736	75.6 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
122692	76.7 to 77.7 feet	**Vertical Change**	3.72"	5 ft	5	REF		
122787	84.2 to 95.6 feet	Key Note Segment		5 ft	57			
122737	99.4 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
122693	110.7 to 111.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
122694	115.5 to 116.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
122695	122.8 to 123.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
122788	126.3 to 140.2 feet	Key Note Segment		5 ft	69			
122696	127.5 to 128.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
122738	144.0 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
122697	147.9 to 148.9 feet	**Vertical Change**	3.25"	5 ft	5	SF	$75	**$375**
122739	149.7 to 205.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	279	SF	$120	**$33,420**
122698	151.9 to 152.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
122699	198.7 to 199.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
122740	208.1 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
122700	211.4 to 212.4 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
122789	226.4 to 238.8 feet	Key Note Segment		5 ft	62			
122741	243.2 to 245.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
122790	251.5 to 264.0 feet	Key Note Segment		5 ft	63			
122742	267.8 to 269.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
122743	269.8 to 278.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071108	E KENNEDY ST	N LAKE ST	TULARE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122701	273.6 to 274.6 feet	Vertical Change	.65"	5 ft	5	REF		
122744	298.9 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
122791	302.8 to 318.4 feet	Key Note Segment		5 ft	78			
122703	303.6 to 304.6 feet	Vertical Change	.45"	5 ft	5	REF		
122704	328.7 to 329.7 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
122705	335.8 to 336.8 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
122792	343.0 to 357.4 feet	Key Note Segment		5 ft	72			
122706	344.2 to 345.2 feet	Vertical Change	-.46"	5 ft	5	REF		
122707	349.4 to 350.4 feet	Vertical Change	.37"	5 ft	5	REF		
122745	359.2 to 381.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	$13,440
122746	384.2 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
122747	388.3 to 391.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
122748	395.7 to 398.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
122793	398.1 to 407.2 feet	Key Note Segment		5 ft	46			
122749	413.5 to 441.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	$17,040
122708	433.6 to 434.6 feet	Vertical Change	.36"	5 ft	5	REF		
122794	443.7 to 452.3 feet	Key Note Segment		5 ft	43			
122750	453.5 to 455.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
122751	459.1 to 463.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
122709	461.3 to 462.3 feet	Vertical Change	.54"	5 ft	5	REF		
122795	465.8 to 484.8 feet	Key Note Segment		5 ft	95			
122710	484.5 to 485.5 feet	Vertical Change	-.34"	5 ft	5	REF		
122752	486.2 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
122753	490.6 to 494.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
122711	492.5 to 493.5 feet	Vertical Change	1.28"	5 ft	5	REF		
122754	512.8 to 514.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
122712	521.7 to 522.7 feet	Vertical Change	.88"	5 ft	5	SF	$75	$375
122755	524.5 to 534.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071108	E KENNEDY ST	N LAKE ST	TULARE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122713	535.1 to 536.1 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
122756	542.0 to 546.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
122714	542.1 to 543.1 feet	Vertical Change	3"	5 ft	5	REF		
122715	549.2 to 550.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
122757	551.3 to 555.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
122796	556.1 to 586.3 feet	Key Note Segment		5 ft	151			
122758	588.4 to 596.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
122759	596.8 to 606.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	$5,700
122717	599.2 to 600.2 feet	Vertical Change	-.29"	5 ft	5	REF		
122760	606.8 to 609.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
122761	610.3 to 614.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	$2,640
122762	615.6 to 631.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,420
122763	632.4 to 650.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	$11,040
122719	647.1 to 648.1 feet	Vertical Change	-.4"	5 ft	5	REF		
122764	651.4 to 658.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
122720	656.3 to 657.3 feet	Vertical Change	.46"	5 ft	5	REF		
122765	661.2 to 677.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	$9,540
122766	677.9 to 691.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
122721	682.3 to 683.3 feet	Vertical Change	.29"	5 ft	5	REF		
122722	690.4 to 691.4 feet	Vertical Change	.51"	5 ft	5	REF		
122723	707.9 to 708.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
122767	711.4 to 746.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	$21,240
122768	758.9 to 760.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
122769	765.7 to 767.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
122770	770.0 to 779.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
122724	777.7 to 778.7 feet	Vertical Change	.49"	5 ft	5	REF		
122771	790.1 to 796.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
122772	807.5 to 820.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071108	E KENNEDY ST	N LAKE ST	TULARE ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122773	824.5 to 828.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
122725	829.2 to 830.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
122774	831.6 to 840.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
122775	845.8 to 849.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
122776	850.5 to 865.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
122797	871.6 to 890.4 feet	Key Note Segment		5 ft	94			
122777	890.6 to 891.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
122778	892.9 to 911.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
122726	904.3 to 905.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
122779	915.3 to 938.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
122727	934.1 to 935.1 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
122780	942.0 to 972.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
122728	968.4 to 969.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
122781	988.3 to 991.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
122782	995.4 to 1006.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
122729	1002.1 to 1003.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
122798	1015.1 to 1033.2 feet	Key Note Segment		5 ft	91			
122730	1016.4 to 1017.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
122783	1039.8 to 1044.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
122784	1045.9 to 1048.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
122785	1051.0 to 1057.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
122799	1058.3 to 1079.1 feet	Key Note Segment		5 ft	104			
122786	1081.2 to 1103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
122731	1086.6 to 1087.6 feet	**Vertical Change**	1.34"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E KENNEDY ST** *Starting at:* **N LAKE ST** **$317,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091624	E LINCOLN AVE	1119 E LINCOLN AVE	MERCED ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130851	0.0 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
130852	4.2 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
130853	27.4 to 61.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,160**
130865	61.6 to 75.1 feet	Key Note Segment		5 ft	67			
130854	75.2 to 101.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	132	SF	$40	**$5,280**
130868	101.1 to 102.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
130855	102.6 to 107.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
130856	107.7 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
130866	109.9 to 120.0 feet	Key Note Segment		5 ft	51			
130857	120.3 to 131.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,180**
130869	128.4 to 129.4 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
130858	133.8 to 143.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
130859	144.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
130867	149.4 to 160.1 feet	Key Note Segment		5 ft	54			
130860	160.9 to 199.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$22,980**
130861	203.3 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
130862	214.6 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
130863	224.6 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
130864	228.9 to 234.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **1119 E LINCOLN AVE** **$90,698.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101130	E LINCOLN AVE	924 E LINCOLN AVE	FRESNO ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131322	1.7 to 10.3 feet	Key Note Segment		5 ft	43			
131315	11.8 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
131324	14.3 to 15.3 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
131316	24.0 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
131308	26.6 to 27.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
131309	30.9 to 31.9 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
131317	33.3 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
131310	35.2 to 36.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
131311	39.8 to 40.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
131312	43.9 to 44.9 feet	**Vertical Change**	1.28"	5 ft	5	SF	$75	**$375**
131323	43.9 to 57.7 feet	Key Note Segment		5 ft	69			
131313	49.8 to 50.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
131318	61.3 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
131319	84.2 to 85.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
131320	85.9 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131321	92.6 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
131325	92.8 to 95.7 feet		5.0-6.0%	5 ft	15			
131326	92.8 to 95.7 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
131327	95.7 to 97.1 feet		6.0-7.0%	5 ft	7			
131314	97.1 to 98.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **924 E LINCOLN AVE** **$28,179.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021613	E LINCOLN AVE	AUSTIN AVE	DELLAVALLE AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118973	1.4 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
118974	7.2 to 10.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
118989	11.1 to 27.0 feet	Key Note Segment		5 ft	80			
118975	27.0 to 32.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	26	SF	$40	**$1,060**
118976	32.3 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
118977	36.8 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
118978	44.1 to 53.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
118979	57.3 to 61.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
118980	61.5 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
118981	70.0 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
118982	84.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
118983	95.0 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
118984	99.8 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
118990	104.6 to 123.3 feet	Key Note Segment		5 ft	94			
118985	123.7 to 164.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	**$24,540**
118971	131.2 to 132.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
118991	165.6 to 172.6 feet	Key Note Segment		5 ft	35			
118986	174.0 to 198.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,640**
118972	175.0 to 176.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
118987	202.3 to 212.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
118988	217.5 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **AUSTIN AVE** **$91,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021650	E LINCOLN AVE	AUSTIN AVE	CUTTING ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119269	0.0 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
119270	3.3 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
119271	7.2 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
119272	23.1 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
119273	31.3 to 43.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
119289	44.3 to 63.9 feet	Key Note Segment		5 ft	98			
119263	62.7 to 63.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
119274	64.3 to 75.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	55	SF	$40	**$2,200**
119264	64.4 to 65.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
119275	77.7 to 79.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
119276	81.8 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
119277	88.6 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
119290	108.5 to 125.1 feet	Key Note Segment		5 ft	83			
119278	126.3 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119279	127.7 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
119280	131.1 to 141.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
119281	143.8 to 158.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,820**
119282	161.3 to 166.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
119283	168.6 to 170.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
119284	171.8 to 173.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
119285	174.9 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119265	185.9 to 186.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
119286	187.3 to 189.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
119287	189.9 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
119266	200.5 to 201.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
119267	204.1 to 205.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
119288	207.0 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
119268	217.2 to 218.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021650	E LINCOLN AVE	AUSTIN AVE	CUTTING ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **E LINCOLN AVE**	*Starting at:* **AUSTIN AVE**					**$87,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021602	E LINCOLN AVE	BLOKER ST	CUTTING ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118915	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
118916	5.0 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
118917	16.3 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
118918	28.3 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
118919	37.5 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
118934	50.7 to 69.8 feet	Key Note Segment		5 ft	96			
118920	75.3 to 90.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
118921	91.6 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
118935	101.7 to 121.4 feet	Key Note Segment		5 ft	99			
118922	123.7 to 124.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
118923	124.9 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
118924	130.9 to 153.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
118925	154.4 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
118926	160.3 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
118927	162.4 to 163.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
118928	169.3 to 174.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
118929	177.2 to 196.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
118930	196.4 to 206.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
118931	209.3 to 211.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
118932	217.8 to 221.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
118933	222.2 to 223.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **BLOKER ST** **$75,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021657	E LINCOLN AVE	BLOKER ST	N LAKE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119334	0.0 to 3.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
119335	5.6 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
119336	16.1 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119337	22.0 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
119338	54.5 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
119330	61.1 to 62.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
119346	79.0 to 103.3 feet	Key Note Segment		5 ft	122			
119347	104.7 to 121.2 feet	Key Note Segment		5 ft	83			
119331	121.3 to 122.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
119339	128.8 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
119340	134.8 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
119341	149.7 to 152.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
119342	154.4 to 156.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
119348	156.4 to 174.3 feet	Key Note Segment		5 ft	90			
119332	172.0 to 175.8 feet	**Vertical Change**	.3"	5 ft	19	REF		
119343	178.9 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
119344	191.3 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
119345	197.9 to 220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
119333	208.8 to 209.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **BLOKER ST** **$61,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031117	E LINCOLN AVE	COLUMBIA ST	SONORA ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119678	14.8 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
119679	26.5 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
119680	45.5 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
119681	56.3 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
119682	77.9 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
119690	90.6 to 91.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
119671	97.5 to 98.5 feet	**Vertical Change**	1.41"	5 ft	5	SF	$75	**$375**
119683	102.9 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
119688	106.6 to 124.3 feet	Key Note Segment		5 ft	89			
119684	124.9 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,580**
119672	141.5 to 142.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
119685	149.3 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
119689	162.5 to 176.9 feet	Key Note Segment		5 ft	72			
119673	163.6 to 164.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
119686	188.3 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
119687	204.3 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
119676	213.4 to 216.8 feet	**Vertical Change**	.27"	5 ft	17	LF	$75	**$1,275**
119677	227.7 to 228.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
119691	235.8 to 237.2 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **COLUMBIA ST** **$63,744.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031527	E LINCOLN AVE	COLUMBIA ST	E SOUTH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120870	3.3 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
120871	9.9 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
120866	11.6 to 12.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
120872	15.1 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
120873	35.7 to 41.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
120867	36.8 to 39.8 feet	**Vertical Change**	.26"	5 ft	15	REF		
120874	41.1 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120875	47.5 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
120876	57.2 to 70.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
120877	71.3 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
120868	79.1 to 80.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
120878	90.3 to 95.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
120879	98.7 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
120888	102.8 to 124.2 feet	Key Note Segment		5 ft	107			
120880	128.3 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
120881	141.8 to 145.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
120869	149.0 to 150.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
120882	149.7 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120883	153.4 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
120884	170.3 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
120885	186.4 to 188.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
120886	189.3 to 211.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
120887	214.9 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **COLUMBIA ST** **$94,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021604	E LINCOLN AVE	CUTTING ST	AUSTIN AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118939	0.7 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
118936	4.9 to 5.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
118956	14.8 to 15.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
118940	20.5 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
118941	26.4 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
118942	44.4 to 56.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
118937	50.8 to 51.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
118943	58.9 to 59.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
118944	59.9 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	202	SF	$120	**$24,180**
118954	100.4 to 121.8 feet	Key Note Segment		5 ft	107			
118945	122.9 to 131.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
118946	139.4 to 150.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
118947	153.2 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
118955	156.0 to 176.4 feet	Key Note Segment		5 ft	102			
118938	156.3 to 157.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
118948	176.4 to 179.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
118949	182.1 to 190.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
118950	194.3 to 198.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
118951	200.7 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
118952	208.0 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
118953	214.3 to 225.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **CUTTING ST** **$83,919.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021652	E LINCOLN AVE	CUTTING ST	BLOKER ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119300	4.8 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
119301	20.7 to 31.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
119302	31.7 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
119303	38.4 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
119304	44.8 to 52.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
119291	47.7 to 48.7 feet	**Vertical Change**	.84"	5 ft	5	REF		
119305	53.1 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
119292	55.8 to 56.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
119313	57.4 to 64.8 feet	Key Note Segment		5 ft	37			
119306	66.1 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
119307	81.6 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
119308	87.5 to 93.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
119293	88.0 to 89.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
119294	92.5 to 93.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
119309	94.8 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
119314	105.5 to 123.0 feet	Key Note Segment		5 ft	88			
119295	107.8 to 108.8 feet	**Vertical Change**	-.55"	5 ft	5	REF		
119296	123.0 to 124.0 feet	**Vertical Change**	3.28"	5 ft	5	REF		
119297	148.5 to 149.5 feet	**Vertical Change**	.9"	5 ft	5	SF	$75	**$375**
119310	158.5 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
119311	168.1 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
119312	174.2 to 178.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
119298	215.3 to 216.3 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
119299	218.4 to 219.4 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **CUTTING ST** **$47,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031144	E LINCOLN AVE	DAVIS ST	SHARON BVD	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119836	0.0 to 1.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
119857	0.7 to 2.1 feet		5.0-6.0%	5 ft	7			
119837	2.7 to 13.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
119856	14.8 to 48.3 feet	Key Note Segment		5 ft	168			
119806	15.7 to 16.7 feet	**Vertical Change**	-.96"	5 ft	5	REF		
119807	26.0 to 27.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
119838	49.7 to 51.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
119839	53.7 to 67.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
119840	68.3 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
119808	85.7 to 88.8 feet	**Vertical Change**	.28"	5 ft	16	REF		
119841	86.7 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
119842	93.1 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
119843	111.6 to 115.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119844	117.8 to 120.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
119845	120.6 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
119810	124.6 to 125.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
119811	131.3 to 132.3 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
119846	132.5 to 145.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
119812	148.3 to 149.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
119813	172.6 to 173.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
119814	177.0 to 178.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
119847	178.1 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
119815	192.0 to 193.0 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
119848	193.3 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119816	202.9 to 203.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119849	203.8 to 212.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
119817	209.1 to 210.1 feet	**Vertical Change**	.52"	5 ft	5	REF		
119818	211.4 to 212.4 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031144	E LINCOLN AVE	DAVIS ST	SHARON BVD	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119819	217.8 to 218.8 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
119850	220.3 to 225.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
119851	225.4 to 285.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	300	SF	$120	$35,940
119820	228.6 to 229.6 feet	Vertical Change	-.26"	5 ft	5	REF		
119821	235.0 to 236.0 feet	Vertical Change	-.26"	5 ft	5	REF		
119822	282.3 to 285.9 feet	Vertical Change	.29"	5 ft	18	REF		
119823	298.3 to 299.3 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
119824	302.7 to 303.7 feet	Vertical Change	-.55"	5 ft	5	SF	$75	$375
119825	310.2 to 311.2 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
119852	314.8 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
119826	323.1 to 324.1 feet	Vertical Change	.54"	5 ft	5	SF	$75	$375
119853	326.4 to 329.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
119827	326.7 to 327.7 feet	Vertical Change	-.45"	5 ft	5	REF		
119828	328.9 to 329.9 feet	Vertical Change	.28"	5 ft	5	REF		
119854	330.6 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,820
119829	338.3 to 339.3 feet	Vertical Change	.44"	5 ft	5	REF		
119830	340.6 to 341.6 feet	Vertical Change	-.28"	5 ft	5	REF		
119831	342.8 to 346.1 feet	Vertical Change	.27"	5 ft	17	REF		
119855	349.1 to 364.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,300
119832	349.8 to 353.1 feet	Vertical Change	.27"	5 ft	17	REF		
119833	356.6 to 357.6 feet	Vertical Change	.39"	5 ft	5	REF		
119834	358.8 to 359.8 feet	Vertical Change	-.28"	5 ft	5	REF		
119835	362.9 to 363.9 feet	Vertical Change	.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **DAVIS ST** **$126,105.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021616	E LINCOLN AVE	DELLAVALLE AVE	NEBRASKA ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118998	1.1 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
118992	1.6 to 2.6 feet	**Vertical Change**	.79"	5 ft	5	REF		
118999	20.1 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
119010	41.5 to 48.6 feet	Key Note Segment		5 ft	36			
118993	42.7 to 43.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
119000	49.8 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$24,000**
118994	63.1 to 64.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
119001	92.3 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
118995	98.0 to 99.0 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
119002	99.2 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
118996	103.8 to 104.8 feet	**Vertical Change**	2.11"	5 ft	5	SF	$75	**$375**
119011	104.6 to 125.0 feet	Key Note Segment		5 ft	102			
119003	125.3 to 130.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$1,000**
119004	134.7 to 135.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
119005	138.8 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**
119012	148.5 to 167.2 feet	Key Note Segment		5 ft	94			
119006	169.2 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
119007	191.7 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
118997	197.0 to 198.0 feet	**Vertical Change**	2.52"	5 ft	5	SF	$75	**$375**
119008	210.3 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
119009	227.8 to 231.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **DELLAVALLE AVE** **$85,525.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031530	E LINCOLN AVE	E SOUTH ST	N D ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120889	2.8 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
120890	13.3 to 20.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
120891	22.9 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
120892	35.1 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
120893	68.6 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
120894	73.8 to 75.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
120895	78.4 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
120896	84.1 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
120897	90.0 to 97.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
120907	104.0 to 125.0 feet	Key Note Segment		5 ft	105			
120898	126.1 to 134.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
120899	134.2 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
120900	149.4 to 159.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
120901	162.3 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
120902	175.1 to 179.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
120903	179.1 to 185.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
120904	188.1 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
120905	203.1 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
120906	214.1 to 222.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **E SOUTH ST** **$82,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101132	E LINCOLN AVE	FRESNO ST	1000 E LINCOLN AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131328	8.9 to 9.9 feet	Vertical Change	-.5"	5 ft	5	SF	$75	**$375**
131329	14.1 to 15.1 feet	Vertical Change	.41"	5 ft	5	LF	$75	**$375**
131332	19.2 to 21.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	12	SF	$120	**$1,380**
131333	21.5 to 22.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
131334	24.8 to 30.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
131330	30.4 to 31.4 feet	Vertical Change	3.4"	5 ft	5	REF		
131336	37.8 to 46.5 feet	Key Note Segment		5 ft	44			
131335	46.5 to 47.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	**$240**
131331	48.6 to 49.6 feet	Vertical Change	.54"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **FRESNO ST** **$6,885.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091628	E LINCOLN AVE	MERCED ST	TULARE ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130877	0.5 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	318	SF	$120	**$38,100**
130870	10.2 to 11.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
130871	45.2 to 46.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
130891	64.0 to 77.1 feet	Key Note Segment		5 ft	65			
130872	70.4 to 71.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
130878	77.1 to 103.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	134	SF	$40	**$5,340**
130873	78.9 to 79.9 feet	**Vertical Change**	3.26"	5 ft	5	REF		
130879	106.1 to 110.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
130892	110.4 to 119.3 feet	Key Note Segment		5 ft	45			
130880	120.3 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
130893	131.4 to 141.3 feet	Key Note Segment		5 ft	50			
130874	132.9 to 133.9 feet	**Vertical Change**	1.27"	5 ft	5	REF		
130881	141.3 to 162.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	107	SF	$40	**$4,280**
130882	178.7 to 183.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
130883	186.9 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
130897	191.7 to 192.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
130894	198.8 to 208.1 feet	Key Note Segment		5 ft	47			
130875	213.4 to 214.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
130884	214.8 to 225.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
130885	231.5 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
130886	242.8 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
130895	247.2 to 257.7 feet	Key Note Segment		5 ft	53			
130887	261.8 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
130896	285.8 to 296.4 feet	Key Note Segment		5 ft	53			
130888	296.4 to 306.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,920**
130889	308.2 to 338.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
130898	318.3 to 319.3 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
130890	340.3 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091628	E LINCOLN AVE	MERCED ST	TULARE ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130899	340.3 to 341.3 feet	Continuous Width	36"	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **MERCED ST** **$113,114.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031105	E LINCOLN AVE	N D ST	SIERRA ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119613	1.2 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	276	SF	$120	**$33,120**
119607	21.8 to 22.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
119608	32.8 to 33.8 feet	**Vertical Change**	.81"	5 ft	5	REF		
119609	45.8 to 46.8 feet	**Vertical Change**	-.49"	5 ft	5	REF		
119614	59.4 to 66.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
119615	66.0 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
119626	76.3 to 101.9 feet	Key Note Segment		5 ft	128			
119610	94.4 to 95.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
119616	102.3 to 108.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
119627	108.3 to 121.6 feet	Key Note Segment		5 ft	67			
119617	129.4 to 132.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
119618	132.1 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
119619	140.0 to 141.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
119620	141.9 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
119611	150.0 to 151.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
119628	155.7 to 168.3 feet	Key Note Segment		5 ft	63			
119621	170.4 to 176.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
119622	177.9 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
119623	190.8 to 196.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
119624	200.8 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
119612	210.4 to 211.4 feet	**Vertical Change**	2.82"	5 ft	5	REF		
119625	221.7 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **N D ST** **$85,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021647	E LINCOLN AVE	N D ST	AUSTIN AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119196	19.8 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119197	31.4 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119198	36.5 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
119199	46.9 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
119200	62.0 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119201	81.2 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119202	96.9 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
119261	107.1 to 124.3 feet	Key Note Segment		5 ft	86			
119203	125.0 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
119204	130.0 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
119205	134.6 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
119206	141.0 to 149.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
119207	152.3 to 158.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
119208	160.2 to 168.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
119209	169.3 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119210	173.8 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
119211	192.7 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
119212	209.6 to 219.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
119213	221.8 to 222.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119214	224.9 to 248.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
119215	252.3 to 253.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
119216	256.1 to 276.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
119217	277.8 to 281.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
119218	284.8 to 291.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
119181	288.6 to 289.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
119219	293.5 to 310.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	84	SF	$120	**$10,080**
119220	310.3 to 327.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
119221	327.5 to 337.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021647	E LINCOLN AVE	N D ST	AUSTIN AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119222	342.3 to 367.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	**$15,000**
119223	367.3 to 373.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
119224	376.3 to 384.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
119183	384.4 to 385.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
119225	388.5 to 393.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
119184	392.4 to 393.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119185	394.3 to 395.3 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
119226	397.4 to 405.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
119227	408.9 to 419.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
119228	419.8 to 429.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
119229	431.6 to 443.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
119230	444.0 to 451.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
119186	446.5 to 447.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
119231	451.8 to 465.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
119187	463.1 to 464.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119232	468.8 to 470.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119233	473.7 to 475.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
119234	476.2 to 477.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
119235	477.8 to 479.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
119236	480.0 to 481.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
119237	481.9 to 484.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
119238	484.5 to 494.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
119239	497.8 to 501.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
119240	501.3 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
119262	514.6 to 543.5 feet	Key Note Segment		5 ft	145			
119241	558.6 to 560.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
119242	563.0 to 568.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
119188	564.8 to 565.8 feet	**Vertical Change**	.7"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021647	E LINCOLN AVE	N D ST	AUSTIN AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119243	571.3 to 574.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
119244	576.8 to 581.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
119245	584.1 to 594.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
119189	589.3 to 590.3 feet	**Vertical Change**	.52"	5 ft	5	REF		
119246	594.6 to 603.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
119247	604.1 to 621.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
119190	605.7 to 606.7 feet	**Vertical Change**	.74"	5 ft	5	REF		
119191	608.9 to 609.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
119248	623.8 to 625.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
119249	627.7 to 643.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
119192	640.9 to 641.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119250	643.7 to 650.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
119251	653.8 to 662.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
119252	662.8 to 700.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,800**
119253	701.3 to 719.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
119254	719.0 to 733.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
119255	736.3 to 748.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
119256	749.5 to 753.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
119193	753.4 to 754.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
119257	758.5 to 761.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
119258	762.3 to 772.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
119259	774.2 to 776.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
119260	778.1 to 801.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
119194	783.5 to 784.5 feet	**Vertical Change**	3.3"	5 ft	5	REF		
119195	792.0 to 793.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **N D ST** **$329,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021555	E LINCOLN AVE	N LAKE ST	BLOKER ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118898	2.8 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
118899	8.3 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
118896	26.0 to 27.0 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
118900	27.8 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
118901	36.3 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
118909	51.5 to 67.6 feet	Key Note Segment		5 ft	80			
118902	75.8 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
118903	90.8 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
118910	106.8 to 124.0 feet	Key Note Segment		5 ft	86			
118911	125.6 to 134.1 feet	Key Note Segment		5 ft	43			
118904	144.8 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
118912	154.4 to 170.0 feet	Key Note Segment		5 ft	78			
118905	190.7 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
118906	203.3 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
118907	216.1 to 222.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
118908	222.9 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
118913	228.9 to 230.5 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **N LAKE ST** **$43,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021618	E LINCOLN AVE	NEBRASKA ST	N D ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119020	0.0 to 3.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
119021	4.5 to 31.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,200**
119013	28.2 to 29.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
119022	31.7 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
119023	50.2 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
119014	57.9 to 58.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
119024	68.6 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
119033	74.3 to 88.2 feet	Key Note Segment		5 ft	70			
119025	89.3 to 95.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
119015	90.3 to 91.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
119026	96.3 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
119027	101.3 to 105.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
119034	105.0 to 127.2 feet	Key Note Segment		5 ft	111			
119028	128.3 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
119035	140.8 to 165.4 feet	Key Note Segment		5 ft	123			
119017	163.7 to 164.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
119029	172.9 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
119030	191.0 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
119018	195.0 to 196.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
119031	215.6 to 221.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
119019	218.9 to 219.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
119032	222.0 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **NEBRASKA ST** **$81,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031157	E LINCOLN AVE	SHARON BVD	DAVIS ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119885	0.9 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
119903	21.4 to 44.4 feet	Key Note Segment		5 ft	115			
119886	49.0 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	289	SF	$120	**$34,620**
119858	62.5 to 63.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
119859	64.6 to 65.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
119860	79.6 to 80.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119861	86.2 to 87.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119862	99.1 to 100.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
119863	101.3 to 102.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
119864	109.1 to 113.1 feet	**Vertical Change**	-.32"	5 ft	20	LF	$75	**$1,500**
119887	112.0 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
119865	114.4 to 115.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
119866	122.9 to 123.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
119888	129.7 to 142.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
119867	140.2 to 141.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119889	143.2 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	242	SF	$120	**$29,040**
119868	146.7 to 147.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
119869	148.9 to 154.2 feet	**Vertical Change**	-.27"	5 ft	26	REF		
119870	161.9 to 162.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
119871	164.0 to 165.0 feet	**Vertical Change**	.7"	5 ft	5	REF		
119872	168.4 to 169.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
119873	172.7 to 173.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
119875	179.2 to 182.3 feet	**Vertical Change**	.29"	5 ft	16	REF		
119876	187.9 to 188.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
119890	194.1 to 195.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
119891	195.4 to 203.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
119904	204.5 to 227.1 feet	Key Note Segment		5 ft	113			
119877	205.4 to 206.4 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031157	E LINCOLN AVE	SHARON BVD	DAVIS ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119878	228.6 to 229.6 feet	Vertical Change	-.41"	5 ft	5	REF		
119892	228.8 to 231.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
119893	232.3 to 264.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	$19,200
119894	264.7 to 266.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
119895	268.8 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,420
119905	274.5 to 298.9 feet	Key Note Segment		5 ft	122			
119896	299.8 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
119906	319.0 to 338.8 feet	Key Note Segment		5 ft	99			
119879	319.9 to 320.9 feet	Vertical Change	-.31"	5 ft	5	REF		
119880	329.5 to 330.5 feet	Vertical Change	.28"	5 ft	5	REF		
119881	339.2 to 340.2 feet	Vertical Change	.29"	5 ft	5	REF		
119907	340.1 to 356.9 feet	Key Note Segment		5 ft	84			
119897	364.9 to 373.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
119882	365.5 to 366.5 feet	Vertical Change	.3"	5 ft	5	REF		
119898	376.2 to 378.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
119883	377.1 to 380.0 feet	Vertical Change	.29"	5 ft	15	REF		
119899	380.6 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	$6,120
119884	386.6 to 387.6 feet	Vertical Change	.27"	5 ft	5	REF		
119900	392.2 to 417.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	$15,120
119901	423.4 to 427.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460
119902	429.2 to 434.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **SHARON BVD** **$165,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031113	E LINCOLN AVE	SIERRA ST	COLUMBIA ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119648	0.9 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
119649	8.2 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,660**
119643	38.7 to 39.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
119650	39.5 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
119651	54.3 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
119652	62.7 to 68.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
119644	67.8 to 68.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
119663	69.4 to 76.6 feet	Key Note Segment		5 ft	36			
119653	77.5 to 106.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,100**
119666	81.6 to 82.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119654	107.4 to 108.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119664	108.8 to 122.1 feet	Key Note Segment		5 ft	67			
119655	126.6 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
119665	140.4 to 148.9 feet	Key Note Segment		5 ft	43			
119646	141.1 to 142.1 feet	**Vertical Change**	3.48"	5 ft	5	REF		
119656	153.9 to 154.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119657	157.8 to 161.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
119658	162.5 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
119659	190.4 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
119660	199.3 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119661	202.7 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
119662	204.1 to 222.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
119647	222.9 to 223.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **SIERRA ST** **$93,834.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031139	E LINCOLN AVE	SONORA ST	DAVIS ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119769	1.4 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	219	SF	$120	**$26,268**
119770	23.7 to 27.6 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	43	SF	$120	**$5,148**
119771	27.8 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	428	SF	$120	**$51,348**
119791	66.8 to 84.0 feet	Key Note Segment		11 ft	189			
119752	82.6 to 83.6 feet	**Vertical Change**	-.32"	11 ft	11	REF		
119772	85.8 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	166	SF	$120	**$19,932**
119798	92.9 to 93.9 feet	**Protruding Object**	72"	11 ft	11	JOB	$99	**$99**
119773	101.3 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	70	SF	$120	**$8,448**
119792	108.8 to 125.2 feet	Key Note Segment		11 ft	180			
119793	128.0 to 136.4 feet	Key Note Segment		11 ft	92			
119774	142.4 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	497	SF	$120	**$59,664**
119753	173.4 to 174.4 feet	**Vertical Change**	-.27"	11 ft	11	LF	$75	**$825**
119754	189.4 to 190.4 feet	**Vertical Change**	-.33"	11 ft	11	LF	$75	**$825**
119794	189.7 to 201.4 feet	Key Note Segment		11 ft	129			
119756	203.6 to 204.6 feet	**Vertical Change**	.41"	11 ft	11	REF		
119775	203.8 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	17	SF	$120	**$1,980**
119776	206.3 to 207.3 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	11	SF	$120	**$1,320**
119795	207.7 to 219.4 feet	Key Note Segment		11 ft	129			
119757	210.1 to 211.1 feet	**Vertical Change**	.28"	11 ft	11	REF		
119777	220.5 to 221.7 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	13	SF	$120	**$1,584**
119778	224.2 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	118	SF	$120	**$14,124**
119779	234.9 to 235.9 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	11	SF	$120	**$1,320**
119780	242.0 to 248.8 feet	Cross Slope (PAR)	6.0-7.0%	11 ft	75	SF	$120	**$8,976**
119781	249.4 to 250.9 feet	Cross Slope (PAR)	5.0-6.0%	11 ft	17	SF	$120	**$1,980**
119796	251.1 to 263.3 feet	Key Note Segment		11 ft	134			
119758	265.5 to 266.5 feet	**Vertical Change**	-.28"	11 ft	11	REF		
119782	266.4 to 268.6 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	24	SF	$120	**$2,904**
119783	268.8 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	134	SF	$120	**$16,104**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031139	E LINCOLN AVE	SONORA ST	DAVIS ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119759	275.9 to 276.9 feet	Vertical Change	-.29"	11 ft	11	REF		
119784	283.3 to 316.2 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	362	SF	$120	$43,428
119760	310.5 to 311.5 feet	Vertical Change	.35"	11 ft	11	REF		
119797	316.9 to 330.1 feet	Key Note Segment		11 ft	145			
119761	318.4 to 319.4 feet	Vertical Change	-.29"	11 ft	11	REF		
119762	327.0 to 328.0 feet	Vertical Change	1.71"	11 ft	11	REF		
119763	329.4 to 330.4 feet	Vertical Change	-.27"	11 ft	11	REF		
119785	332.3 to 335.8 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	39	SF	$120	$4,620
119786	336.1 to 345.1 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	99	SF	$120	$11,880
119764	337.2 to 338.2 feet	Vertical Change	-.33"	11 ft	11	REF		
119765	344.2 to 345.2 feet	Vertical Change	.29"	11 ft	11	REF		
119787	347.3 to 349.1 feet	Cross Slope (PAR)	5.0-6.0%	11 ft	20	SF	$120	$2,376
119766	349.8 to 350.8 feet	Vertical Change	-.35"	11 ft	11	LF	$75	$825
119788	351.5 to 356.9 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	59	SF	$120	$7,128
119767	354.5 to 355.5 feet	Vertical Change	.39"	11 ft	11	REF		
119768	357.1 to 358.1 feet	Vertical Change	-.27"	11 ft	11	REF		
119789	358.0 to 362.7 feet	Cross Slope (PAR)	6.0-7.0%	11 ft	52	SF	$120	$6,204
119790	364.0 to 369.3 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	58	SF	$120	$6,996

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **SONORA ST** **$306,306.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031524	E LINCOLN AVE	SONORA ST	COLUMBIA ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120842	0.6 to 1.6 feet	Vertical Change	.29"	5 ft	5	REF		
120846	1.1 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
120843	6.7 to 7.7 feet	Vertical Change	.3"	5 ft	5	REF		
120847	16.7 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
120865	16.8 to 17.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
120848	27.0 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
120849	42.3 to 43.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
120850	45.1 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
120862	52.7 to 72.6 feet	Key Note Segment		5 ft	99			
120851	76.2 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
120852	81.4 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
120853	86.9 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
120854	103.8 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
120863	110.7 to 128.2 feet	Key Note Segment		5 ft	87			
120855	130.5 to 132.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
120856	133.8 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	$16,800
120844	140.6 to 141.6 feet	Vertical Change	.88"	5 ft	5	REF		
120857	162.9 to 168.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
120864	168.5 to 189.9 feet	Key Note Segment		5 ft	107			
120858	189.9 to 198.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	41	SF	$40	$1,640
120859	198.1 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
120860	204.0 to 219.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
120845	210.0 to 211.0 feet	Vertical Change	-1.02"	5 ft	5	REF		
120861	223.0 to 231.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **SONORA ST** **$68,039.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031201	E LINCOLN AVE	TORRES WAY	SONORA ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119915	0.3 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
119908	12.7 to 13.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
119916	29.1 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
119917	47.5 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
119918	48.8 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
119919	57.6 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
119920	72.3 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
119921	81.9 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
119922	85.9 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
119931	95.6 to 113.1 feet	Key Note Segment		5 ft	88			
119909	113.4 to 114.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
119923	123.5 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119932	125.0 to 144.7 feet	Key Note Segment		5 ft	98			
119910	125.5 to 126.5 feet	**Vertical Change**	.7"	5 ft	5	REF		
119911	144.8 to 145.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119924	154.1 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
119912	160.3 to 161.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
119933	162.6 to 180.8 feet	Key Note Segment		5 ft	91			
119925	181.9 to 183.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
119926	186.6 to 191.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
119927	191.6 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119914	195.8 to 196.8 feet	**Vertical Change**	.95"	5 ft	5	SF	$75	**$375**
119928	201.1 to 202.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
119929	205.9 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
119930	213.6 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**

TOTAL COST FOR: S *side of* **E LINCOLN AVE** *Starting at:* **TORRES WAY** **$58,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091621	E LINCOLN AVE	TULARE ST	1125 E LINCOLN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130842	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
130843	2.4 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
130837	5.7 to 6.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
130838	7.9 to 8.9 feet	**Vertical Change**	3.47"	5 ft	5	REF		
130844	8.8 to 10.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
130839	10.2 to 11.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
130845	13.2 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
130846	29.9 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
130847	38.5 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
130850	45.1 to 55.3 feet	Key Note Segment		5 ft	51			
130840	62.1 to 63.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
130848	66.9 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
130849	70.3 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
130841	70.8 to 71.8 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **E LINCOLN AVE** *Starting at:* **TULARE ST** **$33,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202101116	E RIVERSIDE DR	1117 E RIVERSIDE DR	MERCED ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131235	5.4 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
131242	7.2 to 25.8 feet	Key Note Segment		5 ft	93			
131236	34.1 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131243	36.3 to 53.0 feet	Key Note Segment		5 ft	84			
131231	36.9 to 37.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
131244	60.7 to 78.3 feet	Key Note Segment		5 ft	88			
131237	80.9 to 82.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
131238	96.7 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
131239	115.5 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
131240	124.6 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
131232	127.1 to 128.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
131233	140.8 to 141.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
131241	145.6 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
131234	163.4 to 164.4 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **1117 E RIVERSIDE DR** **$35,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101154	E RIVERSIDE DR	910 E RIVERSIDE DR	912 E RIVERSIDE DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131381	0.6 to 13.7 feet	Key Note Segment		5 ft	66			
131378	17.1 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
131379	27.6 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
131380	34.8 to 41.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
131382	41.0 to 55.0 feet	Key Note Segment		5 ft	70			
131377	42.6 to 43.6 feet	**Vertical Change**	1.52"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **E RIVERSIDE DR** *Starting at:* **910 E RIVERSIDE DR** **$8,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201453	E RIVERSIDE DR	AUSTIN AVE	DELLAVALLE AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41298	0.0 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
41299	6.4 to 16.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
41300	16.5 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
41287	16.7 to 17.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
41301	21.0 to 33.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
41302	35.1 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
41303	43.8 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
41311	45.9 to 57.0 feet	Key Note Segment		5 ft	56			
41304	57.9 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
41305	63.8 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
41306	83.4 to 86.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
41307	90.6 to 103.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
41288	96.6 to 97.6 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
41312	105.3 to 124.8 feet	Key Note Segment		5 ft	98			
41289	113.5 to 114.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
41290	121.1 to 122.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
41308	125.8 to 178.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	261	SF	$120	**$31,320**
41291	131.3 to 132.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
41292	132.9 to 133.9 feet	**Vertical Change**	3.42"	5 ft	5	REF		
41293	141.6 to 142.6 feet	**Vertical Change**	.66"	5 ft	5	REF		
41294	170.4 to 171.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
41295	174.5 to 175.5 feet	**Vertical Change**	2.3"	5 ft	5	REF		
41313	178.2 to 187.7 feet	Key Note Segment		5 ft	48			
41296	187.4 to 188.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
41309	188.3 to 191.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$720**
41310	194.7 to 226.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,020**
41297	229.2 to 230.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **AUSTIN AVE** **$97,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201457	E RIVERSIDE DR	DELLAVALLE AVE	NEBRASKA AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41319	0.0 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41320	6.7 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
41321	16.1 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
41314	19.9 to 20.9 feet	**Vertical Change**	1.21"	5 ft	5	REF		
41322	20.8 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
41323	32.9 to 35.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
41324	37.7 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
41325	49.5 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
41338	63.3 to 76.0 feet	Key Note Segment		5 ft	64			
41326	77.5 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
41327	93.0 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41315	96.0 to 97.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
41328	97.7 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
41339	100.3 to 121.6 feet	Key Note Segment		5 ft	107			
41316	120.5 to 121.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
41329	121.6 to 126.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
41330	126.6 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
41331	139.0 to 143.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
41332	143.9 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41333	147.8 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,500**
41334	176.8 to 178.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
41340	179.5 to 199.1 feet	Key Note Segment		5 ft	98			
41335	199.1 to 206.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,440**
41317	206.6 to 207.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
41336	209.6 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
41337	224.5 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41318	228.0 to 229.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **DELLAVALLE AVE** **$66,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202101151	E RIVERSIDE DR	FRESNO ST	925 E RIVERSIDE DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131371	0.0 to 1.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131375	2.5 to 20.3 feet	Key Note Segment		5 ft	89			
131372	26.3 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131376	35.2 to 55.5 feet	Key Note Segment		5 ft	101			
131368	36.0 to 37.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
131369	57.7 to 58.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
131373	59.8 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
131370	68.3 to 69.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
131374	69.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **FRESNO ST** **$12,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101108	E RIVERSIDE DR	FRESNO ST	RIVERSIDE CT	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131163	0.0 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131164	11.6 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
131165	19.3 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
131166	22.6 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
131167	35.5 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
131168	73.8 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
131169	77.4 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,060**
131162	98.5 to 99.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
131170	105.9 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
131171	109.8 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131172	115.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
131173	121.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
131174	131.4 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **E RIVERSIDE DR** *Starting at:* **FRESNO ST** **$57,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202101122	E RIVERSIDE DR	MERCED ST	FRESNO ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131274	0.3 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
131269	20.9 to 21.9 feet	**Vertical Change**	.71"	5 ft	5	REF		
131275	24.2 to 26.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
131276	26.0 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
131277	36.0 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
131270	52.6 to 53.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
131278	62.5 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
131279	89.5 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
131289	99.0 to 118.3 feet	Key Note Segment		5 ft	97			
131280	120.2 to 125.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
131290	125.1 to 150.8 feet	Key Note Segment		5 ft	129			
131271	128.5 to 129.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
131272	147.5 to 148.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
131281	152.9 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
131282	157.3 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
131283	169.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
131291	178.3 to 197.2 feet	Key Note Segment		5 ft	95			
131284	199.4 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
131273	202.3 to 203.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
131292	203.8 to 223.4 feet	Key Note Segment		5 ft	98			
131285	225.6 to 233.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
131286	236.5 to 256.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
131287	257.1 to 304.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	238	SF	$120	**$28,500**
131288	307.2 to 329.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **MERCED ST** **$124,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41972	8.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	36	SF	$120	**$4,320**
41973	27.9 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	83	SF	$120	**$9,936**
41974	36.9 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	73	SF	$120	**$8,784**
41975	43.9 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	107	SF	$120	**$12,816**
41976	54.9 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	89	SF	$120	**$10,656**
41977	65.1 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	230	SF	$120	**$27,648**
41938	74.9 to 75.9 feet	**Vertical Change**	1.1"	12 ft	12	REF		
41978	87.1 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	28	SF	$120	**$3,312**
41979	95.3 to 96.9 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	19	SF	$120	**$2,304**
41980	98.4 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	53	SF	$120	**$6,336**
41981	105.7 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	13	SF	$120	**$1,584**
41982	121.6 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	13	SF	$120	**$1,584**
41983	133.3 to 135.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	28	SF	$120	**$3,312**
41984	140.3 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	62	SF	$120	**$7,488**
41985	150.9 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	302	SF	$120	**$36,288**
41940	177.6 to 178.6 feet	**Vertical Change**	.27"	12 ft	12	LF	$75	**$900**
41986	184.3 to 194.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	116	SF	$120	**$13,968**
41941	189.2 to 190.2 feet	**Vertical Change**	-.32"	12 ft	12	REF		
41987	198.5 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	232	SF	$120	**$27,792**
41988	224.4 to 232.6 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	98	SF	$120	**$11,808**
41989	232.9 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	253	SF	$120	**$30,384**
41990	256.4 to 263.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	90	SF	$120	**$10,800**
41991	266.5 to 293.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	324	SF	$120	**$38,880**
41942	282.7 to 283.7 feet	**Vertical Change**	.32"	12 ft	12	REF		
41992	297.0 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	13	SF	$120	**$1,584**
41993	300.6 to 306.6 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	72	SF	$120	**$8,640**
41994	306.6 to 352.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	545	SF	$120	**$65,376**
41995	355.6 to 362.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	80	SF	$120	**$9,648**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41943	358.9 to 359.9 feet	Vertical Change	-.28"	12 ft	12	REF		
41996	376.8 to 378.1 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	16	SF	$120	$1,872
41944	377.1 to 378.1 feet	Vertical Change	.63"	12 ft	12	REF		
41997	378.3 to 380.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	28	SF	$120	$3,312
41998	389.7 to 402.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	156	SF	$120	$18,720
41999	402.8 to 438.8 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	432	SF	$120	$51,840
41945	411.7 to 412.7 feet	Vertical Change	.37"	12 ft	12	REF		
42000	439.7 to 455.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	190	SF	$120	$22,752
41946	440.2 to 441.2 feet	Vertical Change	.27"	12 ft	12	REF		
42001	456.8 to 458.2 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	17	SF	$120	$2,016
42002	460.0 to 476.3 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	196	SF	$120	$23,472
42003	476.4 to 480.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	53	SF	$120	$6,336
42004	484.2 to 499.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	181	SF	$120	$21,744
41947	500.9 to 501.9 feet	Vertical Change	.34"	12 ft	12	REF		
42005	501.6 to 503.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	18	SF	$120	$2,160
42006	513.8 to 533.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	233	SF	$120	$27,936
41948	515.2 to 516.2 feet	Vertical Change	-.26"	12 ft	12	REF		
41949	529.9 to 530.9 feet	Vertical Change	.37"	12 ft	12	REF		
42007	535.8 to 543.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	89	SF	$120	$10,656
42008	544.7 to 558.0 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	160	SF	$120	$19,152
41950	547.0 to 548.0 feet	Vertical Change	-.32"	12 ft	12	REF		
42009	558.0 to 562.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	59	SF	$120	$7,056
42010	563.1 to 576.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	158	SF	$120	$19,008
42011	577.1 to 593.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	200	SF	$120	$24,048
41951	591.1 to 592.1 feet	Vertical Change	-.53"	12 ft	12	REF		
42012	598.1 to 605.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	89	SF	$120	$10,656
42013	616.1 to 617.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	16	SF	$120	$1,872
42014	636.9 to 641.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	53	SF	$120	$6,336

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41952	646.3 to 647.3 feet	Vertical Change	.3"	12 ft	12	LF	$75	$900
42015	652.6 to 663.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	125	SF	$120	$14,976
41953	656.4 to 657.4 feet	Vertical Change	.31"	12 ft	12	REF		
42016	667.6 to 707.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	481	SF	$120	$57,744
42017	712.5 to 739.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	322	SF	$120	$38,592
41954	720.3 to 721.3 feet	Vertical Change	.44"	12 ft	12	REF		
42018	742.5 to 754.4 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	143	SF	$120	$17,136
42019	754.4 to 777.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	281	SF	$120	$33,696
42020	784.4 to 797.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	152	SF	$120	$18,288
42021	802.7 to 807.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	61	SF	$120	$7,344
41955	806.0 to 807.0 feet	Vertical Change	.38"	12 ft	12	REF		
42022	807.8 to 819.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	143	SF	$120	$17,136
42023	844.8 to 856.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	144	SF	$120	$17,280
42024	857.5 to 865.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	94	SF	$120	$11,232
41956	869.5 to 870.5 feet	Vertical Change	.34"	12 ft	12	LF	$75	$900
42025	870.8 to 879.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	106	SF	$120	$12,672
41957	877.1 to 878.1 feet	Vertical Change	.31"	12 ft	12	LF	$75	$900
42026	880.0 to 883.9 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	47	SF	$120	$5,616
42027	889.7 to 892.8 feet	Cross Slope (PAR)	6.0-7.0%	12 ft	37	SF	$120	$4,464
42028	894.5 to 903.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	106	SF	$120	$12,672
42029	909.0 to 910.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	16	SF	$120	$1,872
42030	911.3 to 912.7 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	17	SF	$120	$2,016
42031	914.9 to 918.9 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	48	SF	$120	$5,760
42032	918.9 to 940.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	257	SF	$120	$30,816
41958	933.0 to 934.0 feet	Vertical Change	.36"	12 ft	12	REF		
42033	941.3 to 949.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	96	SF	$120	$11,520
42034	951.4 to 955.6 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	50	SF	$120	$6,048
42035	955.6 to 957.9 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	28	SF	$120	$3,312

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42036	959.3 to 960.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	18	SF	$120	**$2,160**
41959	962.0 to 963.0 feet	**Vertical Change**	.46"	12 ft	12	LF	$75	**$900**
42037	966.6 to 967.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	16	SF	$120	**$1,872**
41960	969.9 to 970.9 feet	**Vertical Change**	-.42"	12 ft	12	LF	$75	**$900**
42038	972.3 to 983.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	136	SF	$120	**$16,272**
42039	985.7 to 986.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	13	SF	$120	**$1,584**
42040	991.2 to 997.2 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	72	SF	$120	**$8,640**
42041	1000.2 to 1003.4 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	38	SF	$120	**$4,608**
42042	1004.4 to 1007.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	38	SF	$120	**$4,608**
42043	1010.8 to 1014.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	48	SF	$120	**$5,760**
41961	1016.0 to 1017.0 feet	**Vertical Change**	.3"	12 ft	12	LF	$75	**$900**
42044	1018.9 to 1025.1 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	74	SF	$120	**$8,928**
41962	1022.1 to 1023.1 feet	**Vertical Change**	.27"	12 ft	12	REF		
42045	1025.5 to 1028.3 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	34	SF	$120	**$4,032**
42046	1030.1 to 1033.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	35	SF	$120	**$4,176**
42047	1033.4 to 1055.6 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	266	SF	$120	**$31,968**
42048	1056.5 to 1059.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	37	SF	$120	**$4,464**
42049	1064.2 to 1067.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	37	SF	$120	**$4,464**
42050	1070.8 to 1079.8 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	108	SF	$120	**$12,960**
42051	1080.6 to 1088.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	94	SF	$120	**$11,232**
42052	1111.0 to 1137.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	322	SF	$120	**$38,592**
42053	1141.2 to 1152.9 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	140	SF	$120	**$16,848**
41963	1155.1 to 1156.1 feet	**Vertical Change**	.29"	12 ft	12	LF	$75	**$900**
42054	1158.2 to 1165.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	85	SF	$120	**$10,224**
42055	1169.4 to 1194.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	299	SF	$120	**$35,856**
42056	1200.7 to 1202.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	20	SF	$120	**$2,448**
42057	1226.8 to 1237.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	130	SF	$120	**$15,552**
42058	1237.6 to 1246.1 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	102	SF	$120	**$12,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42059	1246.7 to 1247.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	13	SF	$120	**$1,584**
42060	1250.7 to 1262.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	138	SF	$120	**$16,560**
42061	1264.5 to 1267.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	36	SF	$120	**$4,320**
41965	1275.7 to 1276.7 feet	**Vertical Change**	.4"	12 ft	12	LF	$75	**$900**
42062	1298.2 to 1307.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	115	SF	$120	**$13,824**
42063	1318.3 to 1323.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	60	SF	$120	**$7,200**
42064	1331.3 to 1333.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	30	SF	$120	**$3,600**
42065	1338.1 to 1345.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	92	SF	$120	**$11,088**
42066	1347.9 to 1349.7 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	22	SF	$120	**$2,592**
42067	1351.6 to 1356.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	55	SF	$120	**$6,624**
42068	1358.4 to 1381.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	274	SF	$120	**$32,832**
42069	1383.9 to 1387.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	47	SF	$120	**$5,616**
42070	1390.8 to 1392.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	20	SF	$120	**$2,448**
42071	1404.3 to 1408.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	55	SF	$120	**$6,624**
41966	1411.7 to 1412.7 feet	**Vertical Change**	.42"	12 ft	12	LF	$75	**$900**
42072	1415.0 to 1416.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	22	SF	$120	**$2,592**
41967	1420.5 to 1421.5 feet	**Vertical Change**	.29"	12 ft	12	LF	$75	**$900**
42073	1433.1 to 1436.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	44	SF	$120	**$5,328**
42074	1436.8 to 1454.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	210	SF	$120	**$25,200**
41968	1444.3 to 1445.3 feet	**Vertical Change**	-.31"	12 ft	12	REF		
42075	1456.7 to 1463.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	85	SF	$120	**$10,224**
42076	1466.1 to 1479.1 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	156	SF	$120	**$18,720**
42077	1479.1 to 1497.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	218	SF	$120	**$26,208**
41969	1494.3 to 1495.3 feet	**Vertical Change**	.61"	12 ft	12	REF		
42078	1500.5 to 1532.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	380	SF	$120	**$45,648**
42079	1532.2 to 1544.9 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	152	SF	$120	**$18,288**
42080	1545.7 to 1551.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	73	SF	$120	**$8,784**
42081	1575.5 to 1578.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	34	SF	$120	**$4,032**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201635	E RIVERSIDE DR	N D ST	N LAKE ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42082	1583.4 to 1588.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	66	SF	$120	**$7,920**
42083	1590.5 to 1598.0 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	90	SF	$120	**$10,800**
42084	1599.8 to 1647.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	569	SF	$120	**$68,256**
41971	1638.7 to 1639.7 feet	**Vertical Change**	.39"	12 ft	12	REF		
42087	1700.8 to 1703.8 feet		5.0-6.0%	12 ft	36			
42088	1700.8 to 1703.8 feet	Running Slope	5.0-6.0%	12 ft	36	SF	$120	**$4,320**
42085	1705.3 to 1706.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	17	SF	$120	**$2,016**
42089	1707.8 to 1710.2 feet		5.0-6.0%	12 ft	29			
42090	1707.8 to 1713.2 feet	Running Slope	5.0-6.0%	12 ft	65	SF	$120	**$7,776**
42091	1710.6 to 1713.2 feet	Running Slope	5.0-6.0%	12 ft	31	SF	$120	**$3,744**
42086	1712.7 to 1716.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	46	SF	$120	**$5,472**
42092	1717.3 to 1718.7 feet		9.0-10.0%	12 ft	17			

TOTAL COST FOR: S *side of* **E RIVERSIDE DR** *Starting at:* **N D ST** **$1,626,012.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201448	E RIVERSIDE DR	N LAKE ST	AUSTIN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41214	0.0 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
41195	8.0 to 9.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
41215	30.4 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
41216	47.9 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
41217	66.0 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
41196	81.6 to 82.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
41270	83.3 to 99.2 feet	Key Note Segment		5 ft	80			
41218	101.3 to 105.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
41271	106.3 to 116.3 feet	Key Note Segment		5 ft	50			
41219	117.1 to 121.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
41220	125.5 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
41221	134.5 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
41222	141.1 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
41272	149.3 to 161.0 feet	Key Note Segment		5 ft	58			
41197	159.3 to 160.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
41223	161.6 to 170.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
41224	171.9 to 177.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
41225	179.6 to 180.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
41226	180.8 to 186.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**
41227	187.8 to 193.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
41273	193.3 to 203.1 feet	Key Note Segment		5 ft	49			
41199	194.8 to 195.8 feet	**Vertical Change**	.51"	5 ft	5	REF		
41228	203.3 to 237.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	172	SF	$40	**$6,860**
41200	204.6 to 205.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
41201	209.1 to 210.1 feet	**Vertical Change**	.73"	5 ft	5	REF		
41274	237.9 to 247.4 feet	Key Note Segment		5 ft	48			
41229	253.0 to 267.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,940**
41202	266.7 to 267.7 feet	**Vertical Change**	.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201448	E RIVERSIDE DR	N LAKE ST	AUSTIN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41230	270.2 to 281.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
41275	281.3 to 292.1 feet	Key Note Segment		5 ft	54			
41203	284.8 to 285.8 feet	**Vertical Change**	.58"	5 ft	5	REF		
41204	286.5 to 287.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
41205	289.7 to 290.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
41231	293.0 to 300.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
41232	304.5 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
41233	309.5 to 312.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
41234	313.6 to 316.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
41235	318.2 to 319.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
41236	320.9 to 324.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
41276	325.4 to 335.0 feet	Key Note Segment		5 ft	48			
41206	326.0 to 327.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
41237	335.0 to 341.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	32	SF	$40	**$1,260**
41238	343.5 to 358.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
41207	355.1 to 356.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
41239	360.8 to 363.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
41240	363.8 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
41277	368.8 to 377.7 feet	Key Note Segment		5 ft	45			
41241	383.6 to 423.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,760**
41278	423.2 to 437.3 feet	Key Note Segment		5 ft	71			
41242	437.3 to 442.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
41279	442.3 to 453.0 feet	Key Note Segment		5 ft	54			
41243	453.0 to 454.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
41244	463.5 to 465.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
41245	467.7 to 484.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
41246	485.3 to 486.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
41280	486.6 to 498.6 feet	Key Note Segment		5 ft	60			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201448	E RIVERSIDE DR	N LAKE ST	AUSTIN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41247	504.8 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
41248	517.9 to 519.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
41249	521.9 to 527.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
41250	528.1 to 529.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
41281	529.2 to 538.4 feet	Key Note Segment		5 ft	46			
41208	530.2 to 531.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
41251	559.1 to 562.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
41252	569.0 to 571.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
41282	571.1 to 579.6 feet	Key Note Segment		5 ft	43			
41253	579.6 to 594.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	74	SF	$40	**$2,960**
41209	592.7 to 593.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
41210	596.8 to 601.8 feet	**Vertical Change**	.38"	5 ft	25	LF	$75	**$1,875**
41254	598.4 to 599.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
41255	599.8 to 603.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
41256	610.2 to 617.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
41283	618.1 to 633.5 feet	Key Note Segment		5 ft	77			
41257	633.5 to 634.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
41258	635.2 to 638.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
41259	641.6 to 650.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,220**
41260	652.8 to 676.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,460**
41261	676.9 to 680.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
41284	681.1 to 698.0 feet	Key Note Segment		5 ft	85			
41262	698.0 to 719.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	108	SF	$40	**$4,320**
41211	711.4 to 712.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
41263	723.6 to 726.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
41285	726.3 to 734.8 feet	Key Note Segment		5 ft	43			
41212	742.8 to 743.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
41286	752.5 to 764.2 feet	Key Note Segment		5 ft	59			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201448	E RIVERSIDE DR	N LAKE ST	AUSTIN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41264	765.8 to 768.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
41265	771.3 to 773.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
41266	781.6 to 784.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
41213	785.6 to 786.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
41267	787.0 to 790.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
41268	791.9 to 806.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
41269	808.6 to 811.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **N LAKE ST** **$231,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201504	E RIVERSIDE DR	NEBRASKA AVE	N D ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41343	21.2 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
41344	36.9 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
41345	47.7 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
41346	54.0 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
41347	72.3 to 112.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	201	SF	$120	**$24,060**
41348	113.2 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
41349	117.2 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
41354	123.8 to 144.8 feet	Key Note Segment		5 ft	105			
41350	146.7 to 166.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
41342	155.9 to 156.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
41351	166.3 to 200.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
41352	200.5 to 221.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
41353	221.7 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**

TOTAL COST FOR: N *side of* **E RIVERSIDE DR** *Starting at:* **NEBRASKA AVE** **$113,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101114	E RIVERSIDE DR	RIVERSIDE CT	1117 E RIVERSIDE DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131206	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
131207	1.4 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131208	6.2 to 16.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
131209	18.9 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
131210	26.5 to 35.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
131230	30.6 to 31.6 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
131211	38.8 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
131202	63.7 to 64.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
131212	70.3 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
131226	77.8 to 96.9 feet	Key Note Segment		5 ft	96			
131213	99.2 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
131214	107.7 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
131215	111.6 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
131227	118.7 to 137.9 feet	Key Note Segment		5 ft	96			
131216	139.3 to 146.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
131217	146.3 to 147.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131218	155.5 to 163.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
131228	163.7 to 183.7 feet	Key Note Segment		5 ft	100			
131203	164.2 to 167.8 feet	**Vertical Change**	.27"	5 ft	18	REF		
131204	181.4 to 182.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
131219	185.8 to 187.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
131205	188.1 to 189.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
131220	189.3 to 196.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
131221	198.8 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
131229	207.1 to 225.7 feet	Key Note Segment		5 ft	93			
131222	227.6 to 238.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
131223	241.3 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
131224	251.3 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101114	E RIVERSIDE DR	RIVERSIDE CT	1117 E RIVERSIDE DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131225	308.2 to 313.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: S *side of* **E RIVERSIDE DR** *Starting at:* **RIVERSIDE CT** **$83,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031124	E RUSH ST	101 E RUSH ST	SONORA ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119705	5.3 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	**$2,520**
119700	8.8 to 9.8 feet	**Vertical Change**	-.33"	6 ft	6	REF		
119706	14.6 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
119707	24.5 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,416**
119708	39.7 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
119709	45.7 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	80	SF	$120	**$9,576**
119710	79.5 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
119701	90.0 to 91.0 feet	**Vertical Change**	.26"	6 ft	6	LF	$75	**$450**
119711	91.3 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,672**
119702	96.6 to 97.6 feet	**Vertical Change**	.29"	6 ft	6	LF	$75	**$450**
119712	100.3 to 106.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	34	SF	$120	**$4,104**
119703	102.6 to 103.6 feet	**Vertical Change**	.57"	6 ft	6	REF		
119713	106.3 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
119704	110.4 to 111.4 feet	**Vertical Change**	.32"	6 ft	6	LF	$75	**$450**

TOTAL COST FOR: N *side of* **E RUSH ST** *Starting at:* **101 E RUSH ST** **$38,718.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031128	E RUSH ST	SONORA ST	TORRES WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119724	4.4 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
119725	22.0 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
119726	27.9 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
119727	41.1 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119728	45.6 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
119729	56.3 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
119730	71.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
119731	95.1 to 101.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: N *side of* **E RUSH ST** *Starting at:* **SONORA ST** **$41,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081535	E SHERWOOD WAY	1416 SHERWOOD WAY	FOUNTAIN WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127563	1.0 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
127577	6.8 to 25.8 feet	Key Note Segment		5 ft	95			
127564	30.1 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
127565	39.8 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
127566	48.7 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
127567	51.8 to 57.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
127568	58.3 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
127578	90.0 to 109.0 feet	Key Note Segment		5 ft	95			
127558	90.2 to 91.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
127569	111.4 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
127579	117.8 to 136.7 feet	Key Note Segment		5 ft	94			
127570	139.7 to 171.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
127571	172.9 to 174.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
127580	174.5 to 192.2 feet	Key Note Segment		5 ft	89			
127559	174.6 to 175.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
127560	192.4 to 193.4 feet	**Vertical Change**	-.44"	5 ft	5	REF		
127572	195.9 to 200.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
127573	202.2 to 205.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
127574	205.3 to 222.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
127561	207.5 to 208.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
127575	224.4 to 232.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
127562	226.5 to 227.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
127576	234.3 to 236.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: S *side of* **E SHERWOOD WAY** *Starting at:* **1416 SHERWOOD WAY** **$78,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081558	E SHERWOOD WAY	FOUNTAIN WAY	TULARE ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127727	0.6 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
127728	7.1 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
127729	20.4 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
127770	25.5 to 44.4 feet	Key Note Segment		5 ft	95			
127730	45.8 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
127771	53.3 to 75.3 feet	Key Note Segment		5 ft	110			
127731	75.3 to 96.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	107	SF	$40	**$4,280**
127732	98.2 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
127733	103.5 to 106.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
127772	107.4 to 127.1 feet	Key Note Segment		5 ft	99			
127715	107.8 to 108.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
127734	127.1 to 138.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	55	SF	$40	**$2,200**
127716	136.7 to 137.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
127735	138.8 to 158.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	100	SF	$120	**$12,000**
127717	154.3 to 155.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
127736	158.8 to 190.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	157	SF	$120	**$18,900**
127773	190.3 to 208.4 feet	Key Note Segment		5 ft	91			
127737	211.0 to 236.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
127738	236.8 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
127739	240.8 to 242.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
127774	244.3 to 262.6 feet	Key Note Segment		5 ft	92			
127740	263.3 to 270.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	34	SF	$40	**$1,340**
127741	271.4 to 272.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
127775	273.3 to 291.0 feet	Key Note Segment		5 ft	89			
127742	293.5 to 318.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
127743	321.2 to 331.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
127744	331.7 to 353.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,020**
127776	354.1 to 372.8 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081558	E SHERWOOD WAY	FOUNTAIN WAY	TULARE ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127745	374.7 to 382.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
127718	381.5 to 382.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
127777	382.0 to 400.7 feet	Key Note Segment		5 ft	94			
127746	402.3 to 417.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
127747	420.4 to 428.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
127748	430.8 to 435.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
127778	435.9 to 455.3 feet	Key Note Segment		5 ft	97			
127719	455.5 to 456.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
127749	456.5 to 461.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
127750	461.0 to 490.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
127720	483.3 to 484.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
127751	493.2 to 510.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
127752	510.9 to 517.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
127779	517.9 to 536.8 feet	Key Note Segment		5 ft	94			
127753	540.8 to 553.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
127754	553.8 to 563.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
127755	565.9 to 573.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,740**
127780	573.8 to 592.6 feet	Key Note Segment		5 ft	94			
127756	594.4 to 601.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
127721	598.0 to 599.0 feet	**Vertical Change**	.84"	5 ft	5	REF		
127781	601.4 to 620.3 feet	Key Note Segment		5 ft	94			
127757	622.8 to 685.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	313	SF	$120	**$37,500**
127782	686.1 to 704.9 feet	Key Note Segment		5 ft	94			
127758	706.3 to 713.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
127783	713.9 to 732.4 feet	Key Note Segment		5 ft	93			
127759	732.7 to 744.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
127760	745.8 to 748.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
127761	749.7 to 791.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	209	SF	$120	**$25,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081558	E SHERWOOD WAY	FOUNTAIN WAY	TULARE ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127762	791.4 to 798.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
127784	798.6 to 817.2 feet	Key Note Segment		5 ft	93			
127723	799.3 to 800.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
127763	818.4 to 828.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
127785	828.1 to 845.4 feet	Key Note Segment		5 ft	87			
127724	846.2 to 847.2 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
127764	847.3 to 870.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
127765	873.5 to 879.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
127766	879.8 to 910.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	154	SF	$120	**$18,480**
127786	911.5 to 930.4 feet	Key Note Segment		5 ft	95			
127725	912.2 to 913.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
127767	931.8 to 939.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
127787	941.9 to 961.3 feet	Key Note Segment		5 ft	97			
127768	962.8 to 977.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
127726	974.0 to 975.0 feet	**Vertical Change**	.59"	5 ft	5	REF		
127769	979.2 to 987.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**

TOTAL COST FOR: N *side of* **E SHERWOOD WAY** *Starting at:* **FOUNTAIN WAY** **$333,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081532	E SHERWOOD WAY	TULARE ST	1412 SHERWOOD WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127507	0.6 to 5.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,700**
127508	5.3 to 10.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
127509	13.2 to 22.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
127545	23.3 to 41.5 feet	Key Note Segment		5 ft	91			
127510	45.3 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
127546	55.4 to 74.1 feet	Key Note Segment		5 ft	93			
127511	74.7 to 77.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
127512	82.0 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
127513	86.3 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
127514	100.3 to 108.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
127515	109.3 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
127547	111.0 to 131.0 feet	Key Note Segment		5 ft	100			
127516	136.9 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
127517	161.9 to 175.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
127518	175.9 to 196.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,060**
127548	197.1 to 216.2 feet	Key Note Segment		5 ft	96			
127494	197.4 to 198.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
127519	218.9 to 224.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
127549	224.4 to 243.8 feet	Key Note Segment		5 ft	97			
127495	224.5 to 225.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
127520	248.0 to 267.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
127521	267.2 to 297.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
127496	276.0 to 277.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
127497	293.4 to 294.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
127522	298.3 to 301.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
127523	301.4 to 307.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
127524	308.1 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
127550	310.6 to 329.8 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081532	E SHERWOOD WAY	TULARE ST	1412 SHERWOOD WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127525	331.6 to 338.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
127551	338.9 to 356.9 feet	Key Note Segment		5 ft	90			
127498	359.0 to 360.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
127526	359.8 to 386.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
127527	386.8 to 422.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	176	SF	$120	**$21,120**
127499	421.7 to 422.7 feet	**Vertical Change**	-.42"	5 ft	5	REF		
127552	422.0 to 440.5 feet	Key Note Segment		5 ft	93			
127528	442.8 to 445.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
127529	448.4 to 449.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
127553	449.8 to 468.2 feet	Key Note Segment		5 ft	92			
127530	470.3 to 482.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
127531	482.1 to 496.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
127532	497.5 to 509.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
127500	498.2 to 499.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
127533	512.3 to 522.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
127534	523.0 to 530.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
127535	532.2 to 533.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
127554	533.4 to 552.3 feet	Key Note Segment		5 ft	94			
127536	553.4 to 559.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
127555	560.2 to 579.9 feet	Key Note Segment		5 ft	98			
127537	581.7 to 589.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
127502	591.9 to 592.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
127538	593.0 to 599.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
127539	600.3 to 609.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
127540	609.0 to 613.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
127541	613.9 to 641.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
127556	643.6 to 661.9 feet	Key Note Segment		5 ft	92			
127542	664.6 to 670.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081532	E SHERWOOD WAY	TULARE ST	1412 SHERWOOD WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127557	671.9 to 690.8 feet	Key Note Segment		5 ft	95			
127503	672.0 to 673.0 feet	Vertical Change	.28"	5 ft	5	REF		
127504	691.3 to 692.3 feet	Vertical Change	.26"	5 ft	5	REF		
127543	691.7 to 741.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	250	SF	$120	**$29,940**
127505	707.0 to 708.0 feet	Vertical Change	.27"	5 ft	5	REF		
127506	721.5 to 722.5 feet	Vertical Change	-.3"	5 ft	5	REF		
127544	742.7 to 755.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**

TOTAL COST FOR: S *side of* **E SHERWOOD WAY** *Starting at:* **TULARE ST** **$264,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071017	EAGLE DR	1901 EAGLE DR	E ELLIS ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122291	0.8 to 21.3 feet	Key Note Segment		5 ft	103			
122271	23.3 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
122272	36.7 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
122292	43.1 to 62.3 feet	Key Note Segment		5 ft	96			
122251	43.6 to 44.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
122252	54.1 to 55.1 feet	**Vertical Change**	-.42"	5 ft	5	REF		
122273	63.6 to 65.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
122293	65.9 to 85.6 feet	Key Note Segment		5 ft	98			
122254	85.3 to 86.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
122274	86.8 to 88.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
122275	88.7 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
122255	105.3 to 106.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
122276	116.0 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
122277	125.3 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
122294	134.2 to 153.4 feet	Key Note Segment		5 ft	96			
122257	144.2 to 145.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
122295	158.2 to 177.6 feet	Key Note Segment		5 ft	97			
122258	168.6 to 169.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
122259	177.9 to 178.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
122278	179.5 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
122279	192.5 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
122296	199.6 to 219.1 feet	Key Note Segment		5 ft	98			
122280	221.6 to 239.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
122260	230.3 to 231.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
122261	237.3 to 238.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
122297	240.6 to 260.3 feet	Key Note Segment		5 ft	99			
122281	261.8 to 263.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
122298	265.0 to 285.0 feet	Key Note Segment		5 ft	100			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071017	EAGLE DR	1901 EAGLE DR	E ELLIS ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122282	285.8 to 292.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
122283	292.3 to 312.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
122262	297.4 to 298.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
122263	311.7 to 312.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
122284	313.1 to 316.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
122285	316.1 to 326.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
122264	322.5 to 323.5 feet	**Vertical Change**	1.01"	5 ft	5	REF		
122299	326.2 to 346.6 feet	Key Note Segment		5 ft	102			
122265	338.1 to 339.1 feet	**Vertical Change**	2.49"	5 ft	5	REF		
122286	348.1 to 349.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
122300	351.9 to 371.2 feet	Key Note Segment		5 ft	97			
122266	352.0 to 353.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
122267	370.1 to 371.1 feet	**Vertical Change**	2.91"	5 ft	5	REF		
122287	371.4 to 373.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$480**
122288	373.8 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
122301	413.8 to 433.0 feet	Key Note Segment		5 ft	96			
122268	430.8 to 431.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
122303	433.0 to 434.3 feet		5.0-6.0%	5 ft	7			
122302	437.7 to 457.2 feet	Key Note Segment		5 ft	98			
122289	457.4 to 458.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
122269	458.8 to 459.8 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
122290	459.9 to 474.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
122270	479.5 to 480.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **EAGLE DR** *Starting at:* **1901 EAGLE DR** **$103,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071013	EAGLE DR	E ELLIS ST	1901 EAGLE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122219	9.6 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
122207	11.7 to 12.7 feet	**Vertical Change**	-.45"	5 ft	5	REF		
122220	15.9 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
122240	20.0 to 39.7 feet	Key Note Segment		5 ft	99			
122208	39.8 to 40.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
122221	40.8 to 46.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
122222	46.7 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
122223	53.2 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
122224	60.7 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
122241	65.9 to 85.1 feet	Key Note Segment		5 ft	96			
122225	86.0 to 87.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
122242	90.8 to 109.3 feet	Key Note Segment		5 ft	93			
122226	113.8 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
122227	128.0 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
122228	135.3 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
122243	156.8 to 175.4 feet	Key Note Segment		5 ft	93			
122244	180.5 to 199.8 feet	Key Note Segment		5 ft	97			
122209	208.5 to 209.5 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
122229	220.3 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
122230	228.5 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
122210	238.4 to 239.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
122211	244.7 to 248.5 feet	**Vertical Change**	-.3"	5 ft	19	LF	$75	**$1,425**
122245	247.8 to 265.9 feet	Key Note Segment		5 ft	90			
122212	271.7 to 272.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
122246	271.8 to 290.8 feet	Key Note Segment		5 ft	95			
122231	294.4 to 299.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
122232	299.8 to 320.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
122213	305.9 to 306.9 feet	**Vertical Change**	.53"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071013	EAGLE DR	E ELLIS ST	1901 EAGLE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122214	319.9 to 320.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
122233	326.4 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
122247	337.6 to 356.8 feet	Key Note Segment		5 ft	96			
122215	338.0 to 339.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
122234	360.5 to 362.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
122248	362.2 to 380.5 feet	Key Note Segment		5 ft	92			
122216	380.7 to 381.7 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
122235	381.8 to 390.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
122236	393.3 to 397.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
122237	404.0 to 408.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
122249	410.5 to 431.5 feet	Key Note Segment		5 ft	105			
122238	444.8 to 447.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
122250	455.3 to 475.8 feet	Key Note Segment		5 ft	103			
122218	466.1 to 467.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
122239	478.1 to 479.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **EAGLE DR** *Starting at:* **E ELLIS ST** **$75,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120906	EAGLE WAY	MAKENNA DR	ST TROPEZ DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93621	0.0 to 18.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
93622	18.8 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
93644	24.7 to 45.3 feet	Key Note Segment		5 ft	103			
93604	28.6 to 29.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
93623	45.8 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
93624	48.6 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
93625	52.3 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
93645	54.8 to 76.3 feet	Key Note Segment		5 ft	108			
93605	58.9 to 59.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
93606	67.8 to 68.8 feet	**Vertical Change**	2.98"	5 ft	5	REF		
93607	75.3 to 76.3 feet	**Vertical Change**	-.65"	5 ft	5	REF		
93626	78.2 to 99.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
93608	85.5 to 86.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
93627	99.2 to 107.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
93609	102.1 to 103.1 feet	**Vertical Change**	.5"	5 ft	5	REF		
93628	108.7 to 116.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
93629	117.2 to 121.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
93630	121.0 to 129.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
93631	132.4 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
93646	133.9 to 155.3 feet	Key Note Segment		5 ft	107			
93610	144.1 to 145.1 feet	**Vertical Change**	1.52"	5 ft	5	REF		
93632	157.6 to 167.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
93647	167.0 to 188.1 feet	Key Note Segment		5 ft	106			
93611	168.4 to 169.4 feet	**Vertical Change**	.57"	5 ft	5	REF		
93612	177.7 to 178.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
93613	185.8 to 186.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
93633	190.5 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
93634	203.7 to 207.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120906	EAGLE WAY	MAKENNA DR	ST TROPEZ DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93635	210.0 to 219.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
93648	220.2 to 240.5 feet	Key Note Segment		5 ft	102			
93614	230.8 to 231.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
93615	239.6 to 242.5 feet	**Vertical Change**	.39"	5 ft	15	REF		
93650	242.0 to 243.2 feet		5.0-6.0%	5 ft	6			
93636	242.8 to 248.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
93637	248.3 to 256.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
93616	250.8 to 251.8 feet	**Vertical Change**	.72"	5 ft	5	REF		
93638	258.2 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
93639	267.2 to 268.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
93640	274.2 to 284.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
93617	280.0 to 281.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
93641	284.8 to 294.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
93618	286.3 to 287.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
93642	297.3 to 303.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
93649	303.4 to 329.0 feet	Key Note Segment		5 ft	128			
93620	327.1 to 328.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
93643	330.7 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **EAGLE WAY** *Starting at:* **MAKENNA DR** **$97,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120917	EAGLE WAY	ST TROPEZ DR	MAKENNA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93710	0.0 to 13.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
93711	13.8 to 21.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
93729	21.2 to 46.7 feet	Key Note Segment		5 ft	128			
93697	46.1 to 47.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
93712	46.9 to 48.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**
93713	51.3 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
93730	55.5 to 76.6 feet	Key Note Segment		5 ft	105			
93698	65.5 to 66.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
93699	75.6 to 76.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
93714	77.5 to 84.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
93700	79.6 to 80.6 feet	**Vertical Change**	.85"	5 ft	5	REF		
93715	86.2 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
93716	89.1 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
93717	97.3 to 98.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
93718	98.8 to 108.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
93701	107.6 to 108.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
93731	108.4 to 130.1 feet	Key Note Segment		5 ft	109			
93702	128.8 to 129.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
93719	130.1 to 131.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	8	SF	$40	**$320**
93720	132.8 to 134.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
93721	134.2 to 154.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	102	SF	$120	**$12,240**
93703	140.2 to 141.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
93704	153.6 to 154.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
93722	154.6 to 171.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
93723	173.4 to 174.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
93724	179.5 to 180.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
93705	179.8 to 180.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
93732	192.2 to 212.4 feet	Key Note Segment		5 ft	101			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120917	EAGLE WAY	ST TROPEZ DR	MAKENNA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93725	212.8 to 213.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
93726	219.7 to 221.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
93733	222.5 to 242.8 feet	Key Note Segment		5 ft	102			
93706	223.6 to 224.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
93707	233.2 to 234.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
93727	243.0 to 246.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	18	SF	$40	**$720**
93708	257.3 to 258.3 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
93728	259.4 to 269.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
93709	268.9 to 269.9 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **EAGLE WAY** *Starting at:* **ST TROPEZ DR** **$65,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161123	EASY CT	PAINTBRUSH DR	PAINTBRUSH DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70783	0.0 to 7.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	$4,380
70784	7.3 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
70785	15.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
70786	45.9 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
70787	53.5 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
70796	56.4 to 77.3 feet	Key Note Segment		5 ft	105			
70788	77.3 to 80.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$600
70775	87.2 to 88.2 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
70797	94.7 to 116.0 feet	Key Note Segment		5 ft	107			
70789	116.8 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
70790	123.5 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
70791	135.3 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
70776	141.9 to 142.9 feet	Vertical Change	1.34"	5 ft	5	SF	$75	$375
70798	146.8 to 162.7 feet	Key Note Segment		5 ft	79			
70777	148.3 to 149.3 feet	Vertical Change	-.41"	5 ft	5	REF		
70778	156.0 to 157.0 feet	Vertical Change	.32"	5 ft	5	REF		
70792	168.8 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
70799	172.1 to 193.7 feet	Key Note Segment		5 ft	108			
70793	213.7 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
70779	216.6 to 217.6 feet	Vertical Change	-.26"	5 ft	5	REF		
70800	217.4 to 246.1 feet	Key Note Segment		5 ft	144			
70780	242.4 to 243.4 feet	Vertical Change	1.06"	5 ft	5	REF		
70794	246.1 to 248.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	$440
70781	256.2 to 257.2 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
70782	260.3 to 261.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
70795	264.3 to 266.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200

TOTAL COST FOR: S / N *side of* **EASY CT** *Starting at:* **PAINTBRUSH DR** **$31,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191517	EIGHTH ST	118 EIGHTH ST	S G ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39756	0.0 to 9.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
39757	11.6 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
39758	24.1 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39759	30.7 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
39760	77.8 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	219	SF	$120	**$26,280**

TOTAL COST FOR: NW *side of* **EIGHTH ST** *Starting at:* **118 EIGHTH ST** **$37,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191544	EIGHTH ST	327 S H ST	S H ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39866	2.5 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
39864	18.5 to 19.5 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
39867	23.5 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
39868	35.0 to 39.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
39869	41.7 to 52.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
39870	52.4 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
39871	60.8 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39865	67.8 to 68.8 feet	**Vertical Change**	2.61"	5 ft	5	SF	$75	**$375**
39872	105.5 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39873	121.3 to 124.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: NW *side of* **EIGHTH ST** *Starting at:* **327 S H ST** **$32,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191512	EIGHTH ST	S G ST	S GATEWAY DR	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39738	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39734	4.9 to 5.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
39739	8.3 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
39740	18.7 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,260**
39741	58.6 to 59.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
39735	60.3 to 61.3 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
39742	61.6 to 76.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
39743	79.2 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39753	80.8 to 103.0 feet	Key Note Segment		5 ft	111			
39744	105.9 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
39745	116.8 to 128.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
39736	125.1 to 126.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
39746	130.6 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
39754	165.4 to 184.3 feet	Key Note Segment		5 ft	95			
39737	179.6 to 180.6 feet	**Vertical Change**	1.74"	5 ft	5	REF		
39747	184.3 to 188.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
39748	189.1 to 206.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
39749	210.5 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
39750	219.4 to 223.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
39755	232.6 to 252.8 feet	Key Note Segment		5 ft	101			
39751	252.8 to 261.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,700**
39752	261.6 to 271.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: SE *side of* **EIGHTH ST** *Starting at:* **S G ST** **$95,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191557	EIGHTH ST	S H ST	S G ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39908	0.9 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
39926	2.0 to 3.3 feet		5.0-6.0%	5 ft	7			
39909	2.7 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
39904	5.0 to 6.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
39910	54.8 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
39905	62.4 to 63.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
39906	77.9 to 78.9 feet	**Vertical Change**	1.11"	5 ft	5	SF	$75	**$375**
39924	85.8 to 104.1 feet	Key Note Segment		5 ft	92			
39911	108.7 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
39912	117.7 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
39925	123.8 to 143.6 feet	Key Note Segment		5 ft	99			
39907	133.2 to 134.2 feet	**Vertical Change**	.5"	5 ft	5	REF		
39913	144.3 to 152.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,560**
39914	155.0 to 159.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
39915	159.0 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
39916	164.4 to 167.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
39917	167.8 to 188.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
39918	194.1 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
39919	207.5 to 216.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
39920	219.5 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
39921	225.7 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
39922	234.4 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
39923	252.7 to 272.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**

TOTAL COST FOR: SE *side of* **EIGHTH ST** *Starting at:* **S H ST** **$58,905.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081142	EISENHOWER LN	ADAMS AVE	MADISON DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126009	2.1 to 11.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
126010	14.6 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
126011	18.4 to 21.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
126033	23.5 to 43.0 feet	Key Note Segment		5 ft	98			
126012	43.6 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
126034	51.3 to 65.7 feet	Key Note Segment		5 ft	72			
126013	66.4 to 75.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,740**
126014	78.0 to 81.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
126015	81.7 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
126016	109.5 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
126017	119.6 to 123.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
126018	125.8 to 127.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
126035	128.1 to 142.4 feet	Key Note Segment		5 ft	72			
126019	145.1 to 146.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
126020	148.0 to 154.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
126036	154.9 to 168.3 feet	Key Note Segment		5 ft	67			
126021	169.6 to 192.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
126004	173.0 to 174.0 feet	**Vertical Change**	-.52"	5 ft	5	REF		
126005	187.9 to 188.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
126022	195.8 to 199.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
126023	203.8 to 205.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
126024	208.6 to 211.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
126025	211.9 to 216.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
126026	216.2 to 223.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
126027	225.2 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
126037	231.6 to 246.5 feet	Key Note Segment		5 ft	75			
126028	249.2 to 250.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
126006	250.0 to 251.0 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081142	EISENHOWER LN	ADAMS AVE	MADISON DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126029	253.3 to 257.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
126038	258.2 to 272.9 feet	Key Note Segment		5 ft	73			
126007	269.2 to 270.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
126030	278.0 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
126031	282.8 to 288.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
126032	288.5 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
126008	301.2 to 302.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **EISENHOWER LN** *Starting at:* **ADAMS AVE** **$96,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081425	EISENHOWER LN	COOLIDGE ST	TRUMAN DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127212	0.9 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
127213	2.7 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
127214	14.0 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,580**
127206	32.0 to 33.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
127215	43.2 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
127207	49.9 to 50.9 feet	**Vertical Change**	2.19"	5 ft	5	REF		
127216	60.2 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
127208	84.2 to 85.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
127217	85.3 to 89.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
127218	90.2 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
127219	110.0 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	217	SF	$120	**$26,040**
127209	118.9 to 119.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
127210	136.3 to 137.3 feet	**Vertical Change**	.52"	5 ft	5	REF		
127211	153.4 to 154.4 feet	**Vertical Change**	.48"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **EISENHOWER LN** *Starting at:* **COOLIDGE ST** **$78,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081402	EISENHOWER LN	MADISON DR	MONROE AVE	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127015	0.1 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
127016	18.3 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,200**
127017	58.3 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
127018	65.1 to 78.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
127019	81.0 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
127012	85.1 to 86.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
127013	93.5 to 94.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
127020	94.3 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
127021	112.9 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
127014	119.5 to 120.5 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
127022	123.3 to 127.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
127023	128.4 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
127024	142.8 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**

TOTAL COST FOR: S *side of* **EISENHOWER LN** *Starting at:* **MADISON DR** **$76,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081414	EISENHOWER LN	MONROE AVE	COOLIDGE ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127114	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
127115	9.2 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
127107	23.3 to 24.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
127116	31.1 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
127108	39.7 to 40.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
127109	47.3 to 48.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
127117	49.0 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
127118	52.4 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
127110	73.3 to 74.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
127119	76.3 to 79.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
127120	81.4 to 85.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
127111	82.2 to 83.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
127121	85.5 to 93.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
127112	90.3 to 91.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
127122	99.0 to 105.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
127123	108.8 to 128.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
127113	116.1 to 117.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
127124	130.3 to 144.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
127125	144.8 to 147.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**

TOTAL COST FOR: S *side of* **EISENHOWER LN** *Starting at:* **MONROE AVE** **$66,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081328	EISENHOWER LN	TRUMAN DR	ADAMS AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126984	0.7 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
126999	2.3 to 17.5 feet	Key Note Segment		5 ft	76			
126977	20.8 to 21.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
126985	25.3 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
127000	33.5 to 49.3 feet	Key Note Segment		5 ft	79			
126986	55.8 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
127001	61.5 to 75.3 feet	Key Note Segment		5 ft	69			
126987	75.3 to 88.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	66	SF	$40	**$2,640**
126978	80.3 to 81.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
126988	88.8 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
126989	93.5 to 105.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
126979	94.6 to 95.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
126990	108.5 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
127002	139.2 to 153.7 feet	Key Note Segment		5 ft	73			
126991	153.7 to 165.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	60	SF	$40	**$2,380**
126980	164.0 to 165.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
127003	165.6 to 179.1 feet	Key Note Segment		5 ft	68			
126992	179.3 to 183.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
126993	187.9 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
126994	210.9 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
126981	224.2 to 225.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
126982	241.3 to 242.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
127004	241.8 to 255.8 feet	Key Note Segment		5 ft	70			
126983	254.0 to 255.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
126995	260.9 to 266.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
127005	267.3 to 283.0 feet	Key Note Segment		5 ft	79			
126996	283.0 to 284.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
126997	291.7 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081328	EISENHOWER LN	TRUMAN DR	ADAMS AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126998	300.5 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: N *side of* **EISENHOWER LN** *Starting at:* **TRUMAN DR** **$85,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191052	EL MONTE AVE	811 EL MONTE AVE	823 EL MONTE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102941	2.3 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102930	6.4 to 7.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
102942	12.2 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102943	16.3 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
102931	22.7 to 23.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
102948	24.5 to 45.0 feet	Key Note Segment		5 ft	103			
102944	47.4 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
102933	50.3 to 51.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
102949	53.8 to 73.8 feet	Key Note Segment		5 ft	100			
102945	74.2 to 85.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
102934	75.3 to 76.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
102935	96.7 to 97.7 feet	**Vertical Change**	2.43"	5 ft	5	SF	$75	**$375**
102936	99.0 to 100.0 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
102937	101.7 to 102.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
102946	101.9 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102938	110.4 to 111.4 feet	**Vertical Change**	1.65"	5 ft	5	SF	$75	**$375**
102947	118.5 to 131.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
102950	131.7 to 152.6 feet	Key Note Segment		5 ft	105			
102939	132.4 to 133.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
102940	138.2 to 139.2 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **EL MONTE AVE** *Starting at:* **811 EL MONTE AVE** **$21,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191112	EL MONTE AVE	FAIR OAK AVE	STADIUM RD	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103077	0.0 to 57.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	286	SF	$120	**$34,260**
103072	11.7 to 12.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
103073	24.8 to 25.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
103086	30.8 to 31.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
103074	37.0 to 38.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
103078	60.6 to 75.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
103079	75.0 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
103080	80.9 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
103081	88.6 to 111.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
103082	113.3 to 117.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
103083	119.7 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
103084	125.6 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
103085	132.3 to 174.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	211	SF	$120	**$25,380**
103075	162.8 to 163.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
103076	174.9 to 175.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **EL MONTE AVE** *Starting at:* **FAIR OAK AVE** **$93,594.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211104	EL MONTE CT	MONTEREY ST	MONTEREY ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79113	0.0 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
79109	16.5 to 17.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
79128	23.0 to 42.8 feet	Key Note Segment		5 ft	99			
79110	33.3 to 34.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
79114	44.4 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
79129	60.8 to 81.6 feet	Key Note Segment		5 ft	104			
79115	81.7 to 90.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	45	SF	$40	**$1,800**
79116	92.9 to 95.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
79117	95.3 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
79118	123.3 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
79130	135.9 to 156.3 feet	Key Note Segment		5 ft	102			
79119	163.7 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
79120	177.3 to 178.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79131	179.2 to 199.4 feet	Key Note Segment		5 ft	101			
79111	190.3 to 191.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
79121	200.7 to 217.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
79122	219.6 to 238.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
79123	241.3 to 248.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
79124	249.8 to 257.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,860**
79132	258.8 to 276.3 feet	Key Note Segment		5 ft	88			
79112	266.4 to 267.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
79125	277.3 to 294.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
79133	294.6 to 314.0 feet	Key Note Segment		5 ft	97			
79126	316.9 to 322.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
79127	325.8 to 337.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: N/W/S *side of* **EL MONTE CT** *Starting at:* **MONTEREY ST** **$94,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211056	EL MONTE CT	MONTEREY ST	314 EL MONTE CT	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79093	0.0 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	**$8,304**
79094	20.8 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	149	SF	$120	**$17,856**
79089	46.3 to 47.3 feet	**Vertical Change**	1.11"	4 ft	4	REF		
79095	59.0 to 62.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	13	SF	$120	**$1,584**
79090	60.6 to 61.6 feet	**Vertical Change**	-.31"	4 ft	4	REF		
79091	63.6 to 64.6 feet	**Vertical Change**	.98"	4 ft	4	SF	$75	**$300**
79092	65.4 to 66.4 feet	**Vertical Change**	.41"	4 ft	4	LF	$75	**$300**
79096	69.4 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,352**
79097	74.3 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**

TOTAL COST FOR: S *side of* **EL MONTE CT** *Starting at:* **MONTEREY ST** **$33,384.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210927	EL MONTE ST	SANTA BONITA ST	SANTA CRUZ ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78360	0.3 to 22.3 feet	Key Note Segment		5 ft	110			
78343	20.7 to 21.7 feet	Vertical Change	.29"	5 ft	5	REF		
78346	24.5 to 30.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
78347	33.4 to 35.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
78361	35.9 to 58.1 feet	Key Note Segment		5 ft	111			
78348	58.4 to 61.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	15	SF	$40	**$580**
78349	64.0 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
78362	84.5 to 105.6 feet	Key Note Segment		5 ft	106			
78350	105.6 to 109.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	22	SF	$40	**$860**
78363	110.4 to 131.2 feet	Key Note Segment		5 ft	104			
78344	130.0 to 131.0 feet	Vertical Change	-.5"	5 ft	5	REF		
78351	131.8 to 138.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
78352	138.9 to 142.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
78353	143.2 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
78354	153.1 to 161.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
78355	164.3 to 174.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
78356	176.1 to 186.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
78364	187.8 to 208.7 feet	Key Note Segment		5 ft	105			
78357	211.3 to 213.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
78365	213.6 to 234.3 feet	Key Note Segment		5 ft	104			
78358	234.7 to 238.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
78359	238.0 to 254.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
78345	253.3 to 254.3 feet	Vertical Change	.49"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **EL MONTE ST** *Starting at:* **SANTA BONITA ST** **$60,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210959	EL MONTE ST	SANTA CLARA ST	SANTA BONITA ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78602	0.8 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
78603	17.4 to 18.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
78618	18.6 to 38.5 feet	Key Note Segment		5 ft	99			
78595	19.5 to 20.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78604	39.3 to 43.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
78619	44.4 to 64.8 feet	Key Note Segment		5 ft	102			
78605	65.8 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
78606	91.6 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
78607	108.6 to 118.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
78596	111.3 to 112.3 feet	**Vertical Change**	1.32"	5 ft	5	REF		
78620	119.4 to 140.3 feet	Key Note Segment		5 ft	105			
78608	141.3 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
78621	145.6 to 166.9 feet	Key Note Segment		5 ft	107			
78609	169.5 to 185.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
78610	188.2 to 214.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	131	SF	$120	**$15,720**
78611	214.8 to 222.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
78622	222.3 to 241.9 feet	Key Note Segment		5 ft	98			
78612	245.8 to 247.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
78623	247.6 to 269.1 feet	Key Note Segment		5 ft	108			
78613	270.6 to 299.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	144	SF	$120	**$17,340**
78614	301.9 to 323.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
78598	311.4 to 312.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
78624	324.4 to 344.7 feet	Key Note Segment		5 ft	102			
78599	334.5 to 335.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
78615	345.5 to 351.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
78625	351.3 to 371.1 feet	Key Note Segment		5 ft	99			
78601	361.8 to 362.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
78616	372.9 to 377.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210959	EL MONTE ST	SANTA CLARA ST	SANTA BONITA ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78617	380.0 to 391.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**

TOTAL COST FOR: S *side of* **EL MONTE ST** *Starting at:* **SANTA CLARA ST** **$118,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210932	EL MONTE ST	SANTA CRUZ ST	SANTA CLARA ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78381	1.4 to 18.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
78390	18.3 to 39.8 feet	Key Note Segment		5 ft	107			
78382	42.4 to 44.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
78391	44.4 to 65.4 feet	Key Note Segment		5 ft	105			
78379	55.0 to 56.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
78383	65.8 to 68.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
78384	71.1 to 94.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,280**
78392	96.3 to 117.3 feet	Key Note Segment		5 ft	105			
78385	117.4 to 125.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	42	SF	$40	**$1,660**
78386	125.9 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
78387	132.8 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
78388	135.1 to 145.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
78393	145.8 to 168.3 feet	Key Note Segment		5 ft	112			
78389	170.2 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
78380	171.9 to 172.9 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **EL MONTE ST** *Starting at:* **SANTA CRUZ ST** **$37,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111736	ELLIS ST	16404 KROHN ST	OVERPASS	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134250	2.3 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
134251	6.6 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
134252	43.1 to 45.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
134253	46.1 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,500**
134254	82.1 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
134255	97.8 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
134256	119.8 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
134257	129.5 to 146.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
134258	152.4 to 162.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,020**
134259	178.1 to 192.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	74	SF	$40	**$2,940**
134260	197.5 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
134261	209.8 to 213.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
134262	221.2 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
134263	230.2 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
134264	291.8 to 297.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
134265	305.3 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
134266	312.1 to 313.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
134267	314.1 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
134268	333.0 to 337.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
134246	337.1 to 338.1 feet	**Vertical Change**	2.72"	5 ft	5	REF		
134269	340.2 to 360.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
134247	354.3 to 355.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
134270	365.7 to 368.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134271	402.8 to 406.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
134272	409.5 to 413.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
134273	416.8 to 425.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
134274	437.6 to 439.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
134275	452.4 to 463.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111736	ELLIS ST	16404 KROHN ST	OVERPASS	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134276	471.8 to 478.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
134277	484.7 to 491.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
134278	496.4 to 513.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
134279	515.8 to 550.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
134280	554.1 to 586.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,140**
134281	590.8 to 599.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
134282	601.9 to 606.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
134283	608.9 to 627.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
134248	629.4 to 630.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
134284	630.5 to 662.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,440**
134285	666.3 to 677.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
134286	679.5 to 686.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
134287	688.6 to 691.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
134288	694.3 to 711.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
134289	711.1 to 731.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
134290	732.5 to 734.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
134291	736.8 to 751.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
134292	754.4 to 755.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
134293	757.3 to 763.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
134294	806.7 to 809.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
134295	834.8 to 836.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
134249	849.3 to 850.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **ELLIS ST** *Starting at:* **16404 KROHN ST** **$281,230.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111729	ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134125	0.1 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
134126	72.2 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
134121	112.3 to 113.3 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
134127	115.3 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
134128	171.4 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
134129	224.3 to 227.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
134130	228.2 to 229.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
134122	258.3 to 259.3 feet	**Vertical Change**	3.02"	5 ft	5	SF	$75	**$375**
134131	303.6 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
134132	325.3 to 328.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134123	327.8 to 328.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
134173	334.7 to 336.3 feet		5.0-6.0%	5 ft	8			
134133	336.0 to 386.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	254	SF	$120	**$30,420**
134174	336.8 to 337.8 feet		6.0-7.0%	5 ft	5			
134175	337.8 to 338.9 feet		5.0-6.0%	5 ft	6			
134134	389.7 to 391.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
134135	394.5 to 400.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
134136	403.7 to 409.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
134176	412.7 to 415.7 feet		5.0-6.0%	5 ft	15			
134177	412.7 to 415.7 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
134137	415.2 to 421.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
134178	418.8 to 423.1 feet		5.0-6.0%	5 ft	22			
134179	418.8 to 429.5 feet	Running Slope	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
134180	423.3 to 429.5 feet	Running Slope	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
134138	425.6 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
134181	438.4 to 440.3 feet		5.0-6.0%	5 ft	10			
134182	449.5 to 454.2 feet		5.0-6.0%	5 ft	24			
134183	449.5 to 461.6 feet	Running Slope	5.0-6.0%	5 ft	61	SF	$120	**$7,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111729	ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134184	458.4 to 472.5 feet	Running Slope	5.0-6.0%	5 ft	71	SF	$120	**$8,460**
134185	462.3 to 474.7 feet	Running Slope	5.0-6.0%	5 ft	62	SF	$120	**$7,440**
134139	471.5 to 479.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
134186	472.6 to 478.8 feet	Running Slope	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
134187	475.3 to 496.6 feet	Running Slope	5.0-6.0%	5 ft	107	SF	$120	**$12,780**
134140	480.1 to 591.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	558	SF	$120	**$67,020**
134188	480.7 to 501.1 feet	Running Slope	5.0-6.0%	5 ft	102	SF	$120	**$12,240**
134189	497.0 to 501.1 feet	Running Slope	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
134190	501.1 to 503.5 feet		6.0-7.0%	5 ft	12			
134191	501.1 to 503.5 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
134192	504.0 to 509.6 feet		5.0-6.0%	5 ft	28			
134193	504.0 to 512.5 feet	Running Slope	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
134194	509.8 to 512.5 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
134195	514.9 to 516.4 feet		6.0-7.0%	5 ft	8			
134196	516.4 to 517.7 feet		5.0-6.0%	5 ft	7			
134197	518.4 to 531.1 feet		6.0-7.0%	5 ft	64			
134198	518.4 to 541.5 feet	Running Slope	6.0-7.0%	5 ft	116	SF	$120	**$13,860**
134199	531.3 to 548.5 feet	Running Slope	6.0-7.0%	5 ft	86	SF	$120	**$10,320**
134200	544.2 to 549.6 feet	Running Slope	7.0-8.0%	5 ft	27	SF	$120	**$3,240**
134201	549.6 to 550.6 feet		5.0-6.0%	5 ft	5			
134202	554.1 to 557.8 feet		6.0-7.0%	5 ft	18			
134203	555.6 to 574.0 feet	Running Slope	7.0-8.0%	5 ft	92	SF	$120	**$11,040**
134204	559.3 to 576.4 feet	Running Slope	6.0-7.0%	5 ft	86	SF	$120	**$10,260**
134205	579.1 to 581.8 feet		6.0-7.0%	5 ft	13			
134206	579.1 to 584.6 feet	Running Slope	6.0-7.0%	5 ft	28	SF	$120	**$3,300**
134207	581.9 to 591.4 feet	Running Slope	6.0-7.0%	5 ft	48	SF	$120	**$5,700**
134208	586.6 to 596.0 feet	Running Slope	7.0-8.0%	5 ft	47	SF	$120	**$5,640**
134209	591.4 to 601.6 feet	Running Slope	6.0-7.0%	5 ft	51	SF	$120	**$6,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111729	ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134141	594.6 to 607.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
134210	599.4 to 607.1 feet	Running Slope	6.0-7.0%	5 ft	39	SF	$120	**$4,620**
134211	604.1 to 626.3 feet	Running Slope	6.0-7.0%	5 ft	111	SF	$120	**$13,320**
134142	614.1 to 621.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
134212	617.3 to 626.3 feet	Running Slope	6.0-7.0%	5 ft	45	SF	$120	**$5,400**
134143	624.3 to 625.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
134213	627.0 to 629.5 feet		5.0-6.0%	5 ft	13			
134214	627.0 to 631.6 feet	Running Slope	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
134144	630.0 to 636.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
134215	633.7 to 634.9 feet		5.0-6.0%	5 ft	6			
134216	635.6 to 636.9 feet		6.0-7.0%	5 ft	7			
134217	636.9 to 638.5 feet		5.0-6.0%	5 ft	8			
134218	638.8 to 645.8 feet		6.0-7.0%	5 ft	35			
134219	642.8 to 645.8 feet	Running Slope	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
134145	644.8 to 650.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
134220	645.8 to 648.9 feet		5.0-6.0%	5 ft	16			
134221	645.8 to 650.7 feet	Running Slope	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
134222	650.7 to 655.1 feet		6.0-7.0%	5 ft	22			
134223	651.8 to 655.1 feet	Running Slope	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
134146	652.7 to 664.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,900**
134224	656.1 to 660.0 feet		5.0-6.0%	5 ft	20			
134225	656.1 to 665.7 feet	Running Slope	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
134226	660.2 to 667.4 feet	Running Slope	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
134147	666.8 to 702.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**
134227	667.4 to 671.2 feet		6.0-7.0%	5 ft	19			
134228	672.0 to 674.4 feet		5.0-6.0%	5 ft	12			
134229	672.0 to 682.5 feet	Running Slope	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
134230	675.3 to 682.5 feet	Running Slope	5.0-6.0%	5 ft	36	SF	$120	**$4,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111729	ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134231	682.5 to 684.9 feet		6.0-7.0%	5 ft	12			
134232	682.5 to 684.9 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
134233	684.9 to 687.3 feet		5.0-6.0%	5 ft	12			
134234	684.9 to 693.7 feet	Running Slope	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
134235	688.8 to 693.7 feet	Running Slope	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
134236	700.3 to 706.0 feet		5.0-6.0%	5 ft	29			
134237	700.3 to 706.0 feet	Running Slope	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
134148	706.1 to 713.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
134238	709.5 to 712.2 feet		5.0-6.0%	5 ft	14			
134239	709.5 to 712.2 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
134149	716.9 to 718.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
134150	718.6 to 730.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
134240	718.9 to 721.1 feet		5.0-6.0%	5 ft	11			
134241	718.9 to 727.5 feet	Running Slope	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
134242	721.7 to 730.0 feet	Running Slope	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
134243	727.6 to 730.0 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
134151	733.3 to 737.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
134244	736.6 to 738.3 feet		5.0-6.0%	5 ft	9			
134152	739.9 to 748.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
134153	751.2 to 754.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
134154	758.4 to 781.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
134245	760.8 to 762.3 feet		5.0-6.0%	5 ft	8			
134155	785.1 to 798.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
134156	801.7 to 830.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,460**
134157	836.7 to 840.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
134158	841.3 to 844.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
134124	846.2 to 847.2 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
134159	849.5 to 853.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111729	ELLIS ST	ELLIS ST OVERPASS	25337 ELLIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134160	856.8 to 865.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
134161	871.4 to 896.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
134162	899.8 to 904.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
134163	907.2 to 909.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
134164	912.0 to 927.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
134165	931.0 to 934.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
134166	938.0 to 942.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
134167	947.7 to 952.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
134168	955.8 to 957.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
134169	965.5 to 976.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
134170	979.4 to 982.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134171	987.3 to 989.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
134172	993.2 to 1076.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	417	SF	$120	**$49,980**

TOTAL COST FOR: SE *side of* **ELLIS ST** *Starting at:* **ELLIS ST OVERPASS** **$594,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111721	ELLIS ST	KENNEDY ST	OVERPASS	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134062	0.6 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
134063	6.0 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
134064	21.6 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
134065	31.6 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
134066	42.5 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
134067	75.6 to 78.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134068	99.6 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
134069	111.4 to 112.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
134070	113.8 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,020**
134117	148.0 to 182.2 feet	Key Note Segment		5 ft	171			
134071	186.6 to 190.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
134072	190.5 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
134059	198.5 to 199.5 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
134073	202.2 to 209.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
134074	211.7 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
134075	221.1 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
134076	232.3 to 235.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
134077	243.6 to 251.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
134078	258.0 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
134079	263.4 to 288.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
134080	291.3 to 294.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
134081	295.4 to 317.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
134082	325.8 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
134083	330.9 to 336.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
134084	336.8 to 349.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
134085	350.4 to 357.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
134086	363.5 to 364.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
134087	367.8 to 373.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111721	ELLIS ST	KENNEDY ST	OVERPASS	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134088	377.4 to 423.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	232	SF	$120	**$27,780**
134089	427.5 to 445.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
134090	451.9 to 461.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
134091	466.3 to 468.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
134092	474.8 to 477.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134093	482.5 to 486.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
134094	488.9 to 493.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
134095	506.4 to 508.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
134096	513.3 to 515.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
134097	519.3 to 524.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
134098	528.8 to 538.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
134099	562.3 to 563.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
134100	567.3 to 577.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
134118	581.4 to 584.3 feet		5.0-6.0%	5 ft	14			
134119	581.4 to 584.3 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,740**
134101	586.3 to 590.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
134102	603.7 to 608.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
134103	615.1 to 616.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
134104	622.3 to 631.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
134105	655.4 to 659.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
134106	708.5 to 709.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
134107	713.8 to 715.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
134108	722.8 to 724.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
134109	742.0 to 746.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
134060	753.1 to 754.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
134110	769.0 to 771.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
134111	776.6 to 780.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
134112	783.1 to 788.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202111721	ELLIS ST	KENNEDY ST	OVERPASS	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134120	787.1 to 790.4 feet		5.0-6.0%	5 ft	17			
134113	845.7 to 848.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
134114	857.3 to 862.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
134115	914.8 to 922.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
134116	941.8 to 945.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: SE *side of* **ELLIS ST** *Starting at:* **KENNEDY ST** **$225,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134303	0.5 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
134304	109.8 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
134305	292.3 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
134363	299.3 to 300.3 feet		5.0-6.0%	5 ft	5			
134364	307.2 to 310.3 feet		5.0-6.0%	5 ft	16			
134365	307.2 to 313.5 feet	Running Slope	5.0-6.0%	5 ft	32	SF	$120	$3,780
134366	313.5 to 317.1 feet		6.0-7.0%	5 ft	18			
134306	314.8 to 317.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
134367	314.8 to 317.1 feet	Running Slope	7.0-8.0%	5 ft	12	SF	$120	$1,380
134296	315.0 to 316.0 feet	Vertical Change	.48"	5 ft	5	REF		
134307	318.3 to 320.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
134368	320.2 to 323.2 feet		5.0-6.0%	5 ft	15			
134369	320.2 to 327.4 feet	Running Slope	5.0-6.0%	5 ft	36	SF	$120	$4,320
134370	323.8 to 332.5 feet	Running Slope	5.0-6.0%	5 ft	44	SF	$120	$5,220
134308	324.7 to 327.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
134309	329.7 to 339.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
134371	333.7 to 335.4 feet		6.0-7.0%	5 ft	9			
134372	336.2 to 337.7 feet		5.0-6.0%	5 ft	8			
134373	351.7 to 357.2 feet		5.0-6.0%	5 ft	28			
134374	351.7 to 369.3 feet	Running Slope	5.0-6.0%	5 ft	88	SF	$120	$10,560
134310	354.8 to 357.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
134375	357.5 to 373.1 feet	Running Slope	5.0-6.0%	5 ft	78	SF	$120	$9,360
134311	360.0 to 363.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
134376	369.6 to 379.3 feet	Running Slope	5.0-6.0%	5 ft	49	SF	$120	$5,820
134377	375.3 to 382.0 feet	Running Slope	5.0-6.0%	5 ft	34	SF	$120	$4,020
134312	379.1 to 380.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
134378	379.4 to 387.2 feet	Running Slope	5.0-6.0%	5 ft	39	SF	$120	$4,680
134379	383.7 to 391.9 feet	Running Slope	5.0-6.0%	5 ft	41	SF	$120	$4,920

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134380	387.6 to 391.9 feet	Running Slope	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
134313	392.0 to 393.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
134381	392.5 to 395.5 feet		6.0-7.0%	5 ft	15			
134382	395.8 to 400.5 feet		5.0-6.0%	5 ft	24			
134383	395.8 to 407.9 feet	Running Slope	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
134314	400.3 to 405.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
134384	403.1 to 415.6 feet	Running Slope	5.0-6.0%	5 ft	63	SF	$120	**$7,500**
134385	408.2 to 415.6 feet	Running Slope	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
134315	409.8 to 412.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
134316	416.8 to 438.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
134386	418.1 to 428.2 feet		5.0-6.0%	5 ft	51			
134387	422.6 to 432.2 feet	Running Slope	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
134388	428.3 to 433.6 feet	Running Slope	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
134389	434.4 to 436.1 feet		6.0-7.0%	5 ft	9			
134390	436.1 to 443.6 feet		5.0-6.0%	5 ft	38			
134391	437.5 to 444.8 feet	Running Slope	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
134317	445.0 to 447.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
134392	445.1 to 446.1 feet		6.0-7.0%	5 ft	5			
134393	446.8 to 449.9 feet		5.0-6.0%	5 ft	16			
134394	446.8 to 449.9 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
134395	449.9 to 451.0 feet		6.0-7.0%	5 ft	6			
134396	451.3 to 454.0 feet		5.0-6.0%	5 ft	14			
134397	451.3 to 457.8 feet	Running Slope	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
134398	454.8 to 461.4 feet	Running Slope	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
134399	457.8 to 461.4 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
134400	465.2 to 470.6 feet		5.0-6.0%	5 ft	27			
134401	465.2 to 470.6 feet	Running Slope	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
134402	472.9 to 483.0 feet		5.0-6.0%	5 ft	51			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134403	472.9 to 483.0 feet	Running Slope	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
134318	480.1 to 483.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
134404	484.3 to 485.4 feet		6.0-7.0%	5 ft	6			
134405	486.4 to 494.3 feet		5.0-6.0%	5 ft	40			
134406	486.4 to 500.2 feet	Running Slope	5.0-6.0%	5 ft	69	SF	$120	**$8,280**
134407	498.0 to 500.2 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
134408	500.2 to 504.8 feet		6.0-7.0%	5 ft	23			
134409	501.6 to 506.0 feet	Running Slope	6.0-7.0%	5 ft	22	SF	$120	**$2,640**
134319	505.7 to 511.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
134410	506.0 to 511.8 feet		5.0-6.0%	5 ft	29			
134411	506.0 to 511.8 feet	Running Slope	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
134412	512.2 to 513.3 feet		6.0-7.0%	5 ft	5			
134413	515.4 to 520.7 feet		5.0-6.0%	5 ft	27			
134414	515.4 to 523.5 feet	Running Slope	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
134415	520.9 to 527.8 feet	Running Slope	5.0-6.0%	5 ft	34	SF	$120	**$4,140**
134416	523.8 to 527.8 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
134320	524.6 to 528.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
134417	530.5 to 533.2 feet		5.0-6.0%	5 ft	14			
134418	530.5 to 535.5 feet	Running Slope	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
134419	536.0 to 537.1 feet		6.0-7.0%	5 ft	6			
134420	537.1 to 539.6 feet		5.0-6.0%	5 ft	13			
134421	537.1 to 539.6 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
134297	541.5 to 542.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
134422	542.5 to 547.8 feet		5.0-6.0%	5 ft	26			
134423	545.4 to 551.4 feet	Running Slope	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
134424	548.7 to 555.1 feet	Running Slope	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
134425	552.0 to 559.9 feet	Running Slope	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
134426	555.8 to 561.0 feet	Running Slope	5.0-6.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134427	561.6 to 563.2 feet		6.0-7.0%	5 ft	8			
134428	563.2 to 570.7 feet		5.0-6.0%	5 ft	38			
134429	563.2 to 570.7 feet	Running Slope	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
134298	566.9 to 567.9 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
134430	572.4 to 573.8 feet		6.0-7.0%	5 ft	7			
134431	574.3 to 581.2 feet		5.0-6.0%	5 ft	35			
134432	574.3 to 581.2 feet	Running Slope	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
134321	579.0 to 586.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
134433	581.2 to 583.7 feet		6.0-7.0%	5 ft	13			
134434	581.2 to 583.7 feet	Running Slope	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
134435	586.4 to 587.6 feet		6.0-7.0%	5 ft	6			
134436	587.6 to 596.4 feet		5.0-6.0%	5 ft	44			
134437	590.2 to 601.3 feet	Running Slope	5.0-6.0%	5 ft	55	SF	$120	**$6,660**
134438	601.3 to 605.6 feet		6.0-7.0%	5 ft	22			
134439	601.3 to 605.6 feet	Running Slope	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
134440	605.6 to 609.8 feet		5.0-6.0%	5 ft	21			
134441	605.6 to 613.6 feet	Running Slope	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
134442	610.0 to 629.6 feet	Running Slope	5.0-6.0%	5 ft	98	SF	$120	**$11,760**
134443	615.3 to 637.3 feet	Running Slope	5.0-6.0%	5 ft	110	SF	$120	**$13,200**
134322	617.7 to 618.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
134323	629.1 to 633.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
134444	630.0 to 642.8 feet	Running Slope	5.0-6.0%	5 ft	64	SF	$120	**$7,680**
134445	639.6 to 647.2 feet	Running Slope	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
134446	643.1 to 649.5 feet	Running Slope	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
134324	650.6 to 657.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
134447	656.6 to 658.9 feet		5.0-6.0%	5 ft	12			
134448	656.6 to 681.4 feet	Running Slope	5.0-6.0%	5 ft	124	SF	$120	**$14,880**
134325	660.3 to 663.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134449	667.3 to 681.4 feet	Running Slope	5.0-6.0%	5 ft	71	SF	$120	**$8,460**
134326	667.8 to 678.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
134450	681.4 to 683.1 feet		6.0-7.0%	5 ft	9			
134451	683.1 to 688.1 feet		5.0-6.0%	5 ft	25			
134452	683.1 to 688.1 feet	Running Slope	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
134453	689.6 to 691.3 feet		6.0-7.0%	5 ft	9			
134327	689.8 to 692.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
134454	691.3 to 695.9 feet		5.0-6.0%	5 ft	23			
134455	691.3 to 702.8 feet	Running Slope	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
134456	696.6 to 702.8 feet	Running Slope	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
134328	697.6 to 728.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
134457	704.2 to 707.4 feet		6.0-7.0%	5 ft	16			
134458	704.2 to 707.4 feet	Running Slope	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
134459	708.0 to 709.5 feet		5.0-6.0%	5 ft	8			
134460	709.5 to 710.5 feet		6.0-7.0%	5 ft	5			
134461	712.5 to 717.8 feet		5.0-6.0%	5 ft	27			
134462	712.5 to 717.8 feet	Running Slope	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
134463	722.7 to 725.3 feet		5.0-6.0%	5 ft	13			
134464	722.7 to 730.6 feet	Running Slope	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
134465	727.0 to 734.2 feet	Running Slope	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
134329	729.3 to 731.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
134466	730.7 to 734.2 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
134330	736.4 to 740.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
134467	737.4 to 741.4 feet		5.0-6.0%	5 ft	20			
134468	738.7 to 741.4 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
134331	743.2 to 744.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
134332	744.9 to 747.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
134469	746.4 to 751.5 feet		5.0-6.0%	5 ft	26			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134470	746.4 to 760.5 feet	Running Slope	5.0-6.0%	5 ft	71	SF	$120	**$8,460**
134333	749.4 to 759.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
134471	758.4 to 760.5 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
134334	763.6 to 770.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
134472	765.0 to 766.2 feet		5.0-6.0%	5 ft	6			
134473	766.2 to 768.4 feet		6.0-7.0%	5 ft	11			
134474	766.2 to 768.4 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
134475	768.8 to 770.2 feet		5.0-6.0%	5 ft	7			
134335	773.9 to 776.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
134476	774.8 to 779.5 feet		5.0-6.0%	5 ft	24			
134336	776.8 to 797.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
134477	784.3 to 788.3 feet		5.0-6.0%	5 ft	20			
134478	784.3 to 792.8 feet	Running Slope	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
134479	788.6 to 792.8 feet	Running Slope	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
134337	801.7 to 803.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
134338	805.5 to 848.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	216	SF	$120	**$25,860**
134339	851.5 to 878.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
134299	876.0 to 877.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
134340	881.3 to 885.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
134341	888.4 to 892.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
134342	895.6 to 902.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
134343	907.1 to 913.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
134344	916.1 to 924.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
134345	926.5 to 928.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
134361	928.7 to 947.2 feet	Key Note Segment		5 ft	93			
134346	950.2 to 957.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
134347	959.4 to 960.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
134348	969.1 to 979.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202111743	ELLIS ST	OVERPASS	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134349	991.1 to 992.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
134350	997.9 to 999.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
134351	1004.0 to 1007.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
134352	1010.2 to 1012.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
134362	1013.5 to 1031.7 feet	Key Note Segment		5 ft	91			
134353	1035.3 to 1038.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
134301	1038.3 to 1039.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
134354	1047.3 to 1048.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
134355	1052.3 to 1054.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
134356	1056.8 to 1068.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
134357	1074.3 to 1092.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
134358	1094.5 to 1098.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
134359	1100.3 to 1107.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
134302	1101.0 to 1102.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
134360	1108.3 to 1112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
134480	1111.1 to 1112.3 feet		7.0-8.0%	5 ft	6			

TOTAL COST FOR: NW *side of* **ELLIS ST** *Starting at:* **OVERPASS** **$524,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101242	ELM AVE	112 ELM AVE	SANTA FE CT	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131402	1.7 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
131442	3.6 to 16.8 feet	Key Note Segment		5 ft	66			
131383	4.3 to 5.3 feet	Vertical Change	.26"	5 ft	5	REF		
131403	16.8 to 24.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
131384	17.9 to 18.9 feet	Vertical Change	.36"	5 ft	5	REF		
131404	25.2 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
131405	39.7 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131443	46.4 to 59.7 feet	Key Note Segment		5 ft	67			
131406	60.3 to 86.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	131	SF	$40	**$5,240**
131385	63.3 to 64.3 feet	Vertical Change	.27"	5 ft	5	REF		
131407	86.5 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131408	92.3 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
131386	97.1 to 98.1 feet	Vertical Change	.41"	5 ft	5	REF		
131444	106.4 to 120.1 feet	Key Note Segment		5 ft	69			
131387	106.7 to 107.7 feet	Vertical Change	-.32"	5 ft	5	REF		
131409	120.1 to 130.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	51	SF	$40	**$2,040**
131388	123.8 to 124.8 feet	Vertical Change	.5"	5 ft	5	REF		
131410	132.2 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131445	134.0 to 148.8 feet	Key Note Segment		5 ft	74			
131411	148.8 to 162.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	68	SF	$40	**$2,700**
131389	151.4 to 152.4 feet	Vertical Change	.28"	5 ft	5	REF		
131412	164.4 to 168.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
131413	168.9 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131414	173.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
131391	179.3 to 180.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
131415	183.5 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
131416	191.0 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
131392	192.7 to 193.7 feet	Vertical Change	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101242	ELM AVE	112 ELM AVE	SANTA FE CT	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131446	193.5 to 207.4 feet	Key Note Segment		5 ft	70			
131417	208.5 to 212.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
131393	211.8 to 212.8 feet	Vertical Change	-.48"	5 ft	5	REF		
131394	214.0 to 215.0 feet	Vertical Change	.88"	5 ft	5	SF	$75	$375
131418	215.9 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
131419	217.8 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
131447	220.3 to 234.3 feet	Key Note Segment		5 ft	70			
131420	234.6 to 236.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
131421	237.0 to 250.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
131396	237.6 to 238.6 feet	Vertical Change	.62"	5 ft	5	REF		
131422	253.3 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
131452	255.8 to 256.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
131423	261.4 to 264.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
131424	264.9 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
131425	274.8 to 276.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
131426	277.9 to 280.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
131448	280.6 to 294.6 feet	Key Note Segment		5 ft	70			
131397	287.6 to 288.6 feet	Vertical Change	.29"	5 ft	5	REF		
131427	294.9 to 305.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	53	SF	$40	$2,120
131449	306.7 to 320.4 feet	Key Note Segment		5 ft	68			
131398	323.6 to 324.6 feet	Vertical Change	1"	5 ft	5	SF	$75	$375
131428	324.7 to 326.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
131429	329.6 to 333.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
131430	333.9 to 340.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
131399	347.7 to 348.7 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
131450	350.1 to 363.4 feet	Key Note Segment		5 ft	67			
131431	363.4 to 377.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	68	SF	$40	$2,720
131400	371.0 to 372.0 feet	Vertical Change	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101242	ELM AVE	112 ELM AVE	SANTA FE CT	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131432	380.3 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
131433	383.7 to 387.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
131401	384.5 to 385.5 feet	**Vertical Change**	-.62"	5 ft	5	REF		
131434	387.6 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
131451	398.8 to 409.3 feet	Key Note Segment		5 ft	53			
131435	411.4 to 428.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
131436	430.6 to 431.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
131437	432.2 to 435.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
131438	436.8 to 449.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
131439	451.5 to 455.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
131440	455.5 to 466.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
131441	469.2 to 473.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: SW *side of* **ELM AVE** *Starting at:* **112 ELM AVE** **$116,159.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101624	ELM AVE	1406 E YOSEMITE AVE	E YOSEMITE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132651	20.0 to 31.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	79	SF	$120	**$9,492**
132652	31.3 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	265	SF	$120	**$31,752**
132653	70.6 to 78.7 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	57	SF	$120	**$6,804**
132654	79.3 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	158	SF	$120	**$18,900**
132655	106.3 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	83	SF	$120	**$9,912**
132656	122.9 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**
132657	129.6 to 140.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	76	SF	$120	**$9,156**

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **1406 E YOSEMITE AVE** **$87,024.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101621	ELM AVE	1426 E YOSEMITE AVE	1426 E YOSEMITE AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132635	0.1 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	54	SF	$120	**$6,468**
132631	15.6 to 16.6 feet	**Vertical Change**	.36"	7 ft	7	LF	$75	**$525**
132636	20.0 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	12	SF	$120	**$1,428**
132637	27.1 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	43	SF	$120	**$5,124**
132638	40.0 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	50	SF	$120	**$6,048**
132632	45.8 to 46.8 feet	**Vertical Change**	.29"	7 ft	7	REF		
132639	50.4 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	14	SF	$120	**$1,680**
132633	58.3 to 59.3 feet	**Vertical Change**	-.29"	7 ft	7	LF	$75	**$525**
132640	64.6 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	12	SF	$120	**$1,428**
132641	69.0 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	307	SF	$120	**$36,792**
132634	99.8 to 100.8 feet	**Vertical Change**	.4"	7 ft	7	REF		
132642	116.2 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	30	SF	$120	**$3,612**
132643	128.4 to 162.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	240	SF	$120	**$28,812**

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **1426 E YOSEMITE AVE** **$92,442.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101622	ELM AVE	1426 E YOSEMITE AVE	1426 E YOSEMITE AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132646	1.3 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	48	SF	$120	**$5,796**
132644	1.4 to 2.4 feet	**Vertical Change**	-.26"	7 ft	7	REF		
132647	8.3 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	181	SF	$120	**$21,756**
132648	36.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	116	SF	$120	**$13,860**
132649	55.4 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	27	SF	$120	**$3,276**
132650	59.3 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	284	SF	$120	**$34,104**
132645	97.7 to 98.7 feet	**Vertical Change**	.26"	7 ft	7	REF		

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **1426 E YOSEMITE AVE** **$78,792.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101250	ELM AVE	308 ELM AVE	324 308 ELM AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131525	0.0 to 1.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
131530	1.5 to 18.7 feet	Key Note Segment		5 ft	86			
131524	16.3 to 17.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
131526	20.4 to 21.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
131527	21.8 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
131528	25.2 to 43.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
131529	43.3 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
131531	48.9 to 65.7 feet	Key Note Segment		5 ft	84			

TOTAL COST FOR: SW *side of* **ELM AVE** *Starting at:* **308 ELM AVE** **$16,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101252	ELM AVE	324 ELM AVE	CLINTON ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131539	0.0 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
131552	5.5 to 22.2 feet	Key Note Segment		5 ft	84			
131532	16.6 to 17.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
131540	24.2 to 42.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
131533	39.4 to 40.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
131541	46.9 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
131542	67.5 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
131534	71.9 to 72.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
131543	73.5 to 85.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
131544	85.5 to 92.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
131535	94.2 to 95.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
131545	95.0 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131546	97.4 to 107.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
131553	107.8 to 129.3 feet	Key Note Segment		5 ft	108			
131547	131.7 to 140.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	42	SF	$120	**$5,040**
131548	140.4 to 161.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	107	SF	$120	**$12,840**
131549	162.8 to 182.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,640**
131536	183.1 to 184.1 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
131550	185.0 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
131537	185.2 to 186.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
131551	205.8 to 207.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131538	216.7 to 217.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **ELM AVE** *Starting at:* **324 ELM AVE** **$87,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101549	ELM AVE	448 ELM AVE	CLINTON ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132406	0.3 to 15.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
132407	15.5 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
132437	17.8 to 35.3 feet	Key Note Segment		5 ft	87			
132408	37.0 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
132409	40.7 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
132395	41.1 to 42.1 feet	**Vertical Change**	.81"	5 ft	5	REF		
132396	46.7 to 47.7 feet	**Vertical Change**	2.78"	5 ft	5	REF		
132410	47.1 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
132411	57.2 to 69.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
132412	69.8 to 87.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	**$10,740**
132413	88.1 to 91.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
132414	94.5 to 104.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
132415	105.7 to 106.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
132438	106.9 to 124.2 feet	Key Note Segment		5 ft	87			
132416	125.9 to 131.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
132439	131.3 to 148.3 feet	Key Note Segment		5 ft	85			
132417	150.3 to 187.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	185	SF	$120	**$22,200**
132418	191.3 to 198.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
132440	198.5 to 214.8 feet	Key Note Segment		5 ft	82			
132419	217.1 to 219.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
132441	220.4 to 237.5 feet	Key Note Segment		5 ft	86			
132420	240.5 to 243.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
132397	240.8 to 241.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
132421	245.8 to 267.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,260**
132422	270.8 to 286.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
132442	286.7 to 303.9 feet	Key Note Segment		5 ft	86			
132423	305.4 to 307.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
132424	307.2 to 309.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101549	ELM AVE	448 ELM AVE	CLINTON ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132398	309.1 to 310.1 feet	Vertical Change	.27"	5 ft	5	REF		
132443	309.1 to 326.6 feet	Key Note Segment		5 ft	88			
132399	329.4 to 330.4 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
132425	330.7 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
132426	335.3 to 347.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,020
132427	347.4 to 367.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	$12,180
132400	351.7 to 352.7 feet	Vertical Change	-.27"	5 ft	5	REF		
132428	368.4 to 373.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
132429	374.1 to 376.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
132444	376.7 to 394.3 feet	Key Note Segment		5 ft	88			
132401	395.4 to 396.4 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
132430	396.8 to 398.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
132445	399.3 to 415.3 feet	Key Note Segment		5 ft	80			
132431	417.3 to 420.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
132402	418.3 to 419.3 feet	Vertical Change	-.32"	5 ft	5	REF		
132432	421.2 to 430.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	$5,460
132433	430.6 to 437.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
132434	437.8 to 442.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
132446	442.1 to 460.5 feet	Key Note Segment		5 ft	92			
132403	451.4 to 452.4 feet	Vertical Change	-.27"	5 ft	5	REF		
132435	462.6 to 475.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,920
132404	462.8 to 463.8 feet	Vertical Change	.3"	5 ft	5	REF		
132405	473.3 to 474.3 feet	Vertical Change	-.26"	5 ft	5	REF		
132436	476.9 to 484.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,380

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **448 ELM AVE** **$157,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101616	ELM AVE	CLINTON ST	SANTA FE ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132592	5.8 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
132593	15.2 to 21.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
132608	21.7 to 35.1 feet	Key Note Segment		5 ft	67			
132594	38.3 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
132609	47.1 to 60.8 feet	Key Note Segment		5 ft	69			
132587	47.5 to 48.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
132588	58.3 to 59.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
132595	61.5 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
132589	64.9 to 65.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
132610	116.5 to 129.6 feet	Key Note Segment		5 ft	66			
132590	117.1 to 118.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
132596	131.8 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
132611	141.3 to 154.8 feet	Key Note Segment		5 ft	68			
132597	154.8 to 183.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	145	SF	$40	**$5,800**
132598	186.6 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
132599	204.6 to 210.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
132612	210.9 to 225.0 feet	Key Note Segment		5 ft	71			
132600	225.3 to 228.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
132601	229.3 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
132613	235.3 to 249.8 feet	Key Note Segment		5 ft	73			
132602	249.8 to 259.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	48	SF	$40	**$1,900**
132603	259.9 to 278.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
132604	291.4 to 293.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
132605	295.4 to 321.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
132606	324.3 to 337.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
132607	340.2 to 351.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
132591	341.3 to 342.3 feet	**Vertical Change**	3.41"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **CLINTON ST** **$87,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101545	ELM AVE	CLINTON ST	448 ELM AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132340	0.5 to 1.5 feet	Vertical Change	-.26"	5 ft	5	REF		
132354	0.5 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	$4,680
132355	8.8 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
132384	13.4 to 28.6 feet	Key Note Segment		5 ft	76			
132356	31.7 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
132357	38.6 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
132385	41.3 to 60.7 feet	Key Note Segment		5 ft	97			
132341	41.6 to 42.6 feet	Vertical Change	-.37"	5 ft	5	REF		
132342	61.9 to 62.9 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
132358	63.3 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
132359	79.2 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
132360	86.5 to 92.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,780
132361	95.3 to 108.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	$7,680
132362	108.7 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
132343	109.4 to 110.4 feet	Vertical Change	-.36"	5 ft	5	REF		
132386	110.3 to 128.9 feet	Key Note Segment		5 ft	93			
132363	131.1 to 135.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,820
132387	135.8 to 154.6 feet	Key Note Segment		5 ft	94			
132364	155.2 to 157.4 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	11	SF	$40	$440
132344	155.3 to 156.3 feet	Vertical Change	.42"	5 ft	5	REF		
132365	159.0 to 162.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,280
132366	164.9 to 179.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	$8,940
132367	184.6 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	$10,920
132345	189.8 to 190.8 feet	Vertical Change	-.28"	5 ft	5	REF		
132388	202.8 to 223.8 feet	Key Note Segment		5 ft	105			
132346	226.5 to 227.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
132389	228.8 to 252.3 feet	Key Note Segment		5 ft	118			
132347	249.8 to 250.8 feet	Vertical Change	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101545	ELM AVE	CLINTON ST	448 ELM AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132368	253.3 to 262.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
132369	262.2 to 273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
132348	271.6 to 272.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
132370	275.8 to 284.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,460**
132371	286.8 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
132390	292.8 to 312.4 feet	Key Note Segment		5 ft	98			
132372	314.7 to 318.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
132373	319.0 to 332.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
132349	319.2 to 320.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
132374	335.5 to 339.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
132375	340.0 to 341.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
132391	341.1 to 355.3 feet	Key Note Segment		5 ft	71			
132350	341.7 to 342.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
132376	355.8 to 358.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
132351	356.0 to 357.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
132392	358.5 to 377.5 feet	Key Note Segment		5 ft	95			
132377	380.3 to 425.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	228	SF	$120	**$27,300**
132352	410.7 to 411.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
132393	425.8 to 443.5 feet	Key Note Segment		5 ft	89			
132378	445.9 to 447.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
132394	447.7 to 467.1 feet	Key Note Segment		5 ft	97			
132379	470.7 to 474.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
132380	474.8 to 476.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
132381	480.2 to 488.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
132382	488.3 to 489.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
132383	492.3 to 499.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
132353	496.6 to 497.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **ELM AVE** *Starting at:* **CLINTON ST** **$131,945.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101249	ELM AVE	SANTA FE CT	308 ELM AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131514	0.0 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
131515	7.5 to 8.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
131516	9.3 to 10.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$900**
131517	11.7 to 13.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
131518	13.9 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	180	SF	$120	**$21,540**
131513	50.6 to 51.6 feet	**Vertical Change**	2.12"	5 ft	5	SF	$75	**$375**
131519	52.7 to 72.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
131520	72.3 to 83.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
131521	83.1 to 91.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
131523	99.6 to 115.5 feet	Key Note Segment		5 ft	80			
131522	119.9 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**

TOTAL COST FOR: SW *side of* **ELM AVE** *Starting at:* **SANTA FE CT** **$62,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101619	ELM AVE	SANTA FE ST	221 ELM AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132616	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
132626	5.2 to 22.0 feet	Key Note Segment		5 ft	84			
132617	23.4 to 24.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
132618	24.6 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
132614	25.1 to 26.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
132627	42.6 to 60.9 feet	Key Note Segment		5 ft	92			
132619	62.8 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
132620	78.4 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
132628	81.8 to 100.0 feet	Key Note Segment		5 ft	91			
132621	102.6 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
132629	108.3 to 126.1 feet	Key Note Segment		5 ft	89			
132622	129.3 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
132615	136.0 to 137.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
132623	147.3 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
132630	156.5 to 173.4 feet	Key Note Segment		5 ft	85			
132624	176.3 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
132625	188.1 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: NE *side of* **ELM AVE** *Starting at:* **SANTA FE ST** **$32,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111152	EMERALD WY	SCARLET DR	STOREY RD	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132966	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
132967	3.8 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
132968	29.4 to 32.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
132969	32.8 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
132970	37.2 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
132965	53.3 to 54.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
132971	63.6 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: W *side of* **EMERALD WY** *Starting at:* **SCARLET DR** **$34,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111200	EMERALD WY	STOREY RD	SCARLET DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133015	0.2 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
133016	19.3 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
133017	23.3 to 32.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
133018	33.2 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
133019	37.6 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
133020	55.2 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
133021	60.9 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: E *side of* **EMERALD WY** *Starting at:* **STOREY RD** **$29,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201239	EMILY WAY	995 EMILY WAY	ALMOND AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76595	0.0 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
76585	6.5 to 7.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
76596	7.3 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
76597	17.2 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
76598	30.5 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
76586	34.6 to 35.6 feet	**Vertical Change**	-.37"	5 ft	5	REF		
76599	41.9 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
76600	49.8 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
76629	56.3 to 85.4 feet	Key Note Segment		5 ft	146			
76587	83.7 to 84.7 feet	**Vertical Change**	1.24"	5 ft	5	REF		
76601	94.6 to 96.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
76602	113.8 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
76603	131.0 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
76604	139.3 to 143.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
76605	152.9 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
76588	159.8 to 160.8 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
76606	162.8 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
76589	165.3 to 166.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
76590	169.4 to 170.4 feet	**Vertical Change**	1.72"	5 ft	5	SF	$75	**$375**
76607	172.3 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
76630	204.5 to 233.3 feet	Key Note Segment		5 ft	144			
76608	233.3 to 234.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$220**
76609	235.1 to 246.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
76610	249.4 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
76591	260.8 to 261.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
76611	297.8 to 301.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76612	301.0 to 302.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
76613	311.5 to 314.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201239	EMILY WAY	995 EMILY WAY	ALMOND AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76631	314.8 to 345.0 feet	Key Note Segment		5 ft	151			
76592	343.0 to 344.0 feet	Vertical Change	.3"	5 ft	5	REF		
76614	346.7 to 353.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
76615	353.8 to 373.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	97	SF	$120	**$11,640**
76632	373.2 to 402.4 feet	Key Note Segment		5 ft	146			
76616	403.5 to 407.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
76617	407.3 to 415.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
76618	415.6 to 420.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,820**
76619	423.4 to 426.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
76620	426.2 to 431.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
76621	432.4 to 440.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
76622	441.2 to 446.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
76623	447.9 to 457.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
76624	460.3 to 463.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
76625	466.6 to 486.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,820**
76626	489.9 to 504.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
76593	504.8 to 505.8 feet	Vertical Change	-.31"	5 ft	5	REF		
76627	504.8 to 514.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
76628	515.9 to 519.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
76594	519.5 to 520.5 feet	Vertical Change	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **EMILY WAY** *Starting at:* **995 EMILY WAY** **$150,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201043	EMILY WAY	ALMOND AVE	JOYA DR	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75581	0.0 to 9.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	$5,700
75582	11.9 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$5,040
75583	23.8 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
75584	26.4 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
75627	32.9 to 34.3 feet		5.0-6.0%	5 ft	7			
75571	36.4 to 37.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
75585	37.6 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
75586	45.3 to 52.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
75587	53.5 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,280
75572	69.7 to 70.7 feet	Vertical Change	-.53"	5 ft	5	REF		
75588	69.8 to 71.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$780
75623	71.1 to 99.4 feet	Key Note Segment		5 ft	142			
75573	72.8 to 73.8 feet	Vertical Change	.43"	5 ft	5	REF		
75589	101.0 to 167.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	330	SF	$120	$39,600
75574	153.4 to 154.4 feet	Vertical Change	.27"	5 ft	5	REF		
75590	167.3 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
75591	177.6 to 182.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
75624	182.4 to 211.3 feet	Key Note Segment		5 ft	145			
75592	212.8 to 219.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840
75593	219.2 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	$15,060
75594	247.8 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
75595	257.4 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
75596	264.5 to 273.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,160
75597	273.3 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
75598	289.1 to 299.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	$6,240
75575	296.6 to 297.6 feet	Vertical Change	-.27"	5 ft	5	REF		
75599	299.9 to 300.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
75600	304.2 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201043	EMILY WAY	ALMOND AVE	JOYA DR	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75625	319.3 to 342.3 feet	Key Note Segment		5 ft	115			
75576	320.4 to 321.4 feet	Vertical Change	-.33"	5 ft	5	REF		
75601	347.5 to 349.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
75602	363.8 to 367.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
75603	367.1 to 375.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
75577	373.3 to 374.3 feet	Vertical Change	.37"	5 ft	5	REF		
75604	376.0 to 412.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	184	SF	$120	$22,080
75605	413.6 to 414.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600
75606	416.4 to 421.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	$2,940
75607	423.5 to 424.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
75608	424.5 to 431.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
75609	434.4 to 438.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
75610	438.7 to 447.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,280
75611	449.0 to 471.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	$13,680
75612	471.8 to 479.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,860
75613	479.9 to 481.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
75626	481.0 to 504.9 feet	Key Note Segment		5 ft	120			
75578	482.0 to 483.0 feet	Vertical Change	.26"	5 ft	5	REF		
75579	503.5 to 504.5 feet	Vertical Change	.32"	5 ft	5	REF		
75614	506.0 to 510.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
75615	514.1 to 517.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
75616	519.7 to 520.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600
75617	522.3 to 525.5 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	16	SF	$120	$1,920
75580	526.2 to 527.2 feet	Vertical Change	.85"	5 ft	5	SF	$75	$375
75618	527.8 to 530.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
75619	532.8 to 557.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	$14,760
75620	557.4 to 564.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
75621	567.0 to 584.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	$10,620

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201043	EMILY WAY	ALMOND AVE	JOYA DR	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75622	588.7 to 592.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**

TOTAL COST FOR: W *side of* **EMILY WAY** *Starting at:* **ALMOND AVE** **$234,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201155	EMILY WAY	BO TREE LN	GARY LN	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76291	0.0 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
76292	3.8 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
76293	12.5 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
76294	16.3 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
76295	39.9 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	180	SF	$120	**$21,540**
76289	54.8 to 55.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
76296	77.0 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
76297	83.0 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
76298	89.5 to 114.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
76299	115.8 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
76300	152.8 to 166.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
76301	170.3 to 182.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
76290	175.1 to 176.1 feet	**Vertical Change**	.95"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **EMILY WAY** *Starting at:* **BO TREE LN** **$100,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201233	EMILY WAY	JOYA DR	BO TREE LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76572	2.3 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
76573	16.1 to 27.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,900**
76574	30.5 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
76575	34.5 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	247	SF	$120	**$29,580**
76570	68.0 to 69.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
76576	86.8 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
76577	89.3 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
76578	102.0 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
76571	103.8 to 104.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
76579	122.8 to 127.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
76580	127.0 to 134.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
76581	136.6 to 138.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
76583	141.8 to 145.3 feet		5.0-6.0%	5 ft	18			
76584	141.8 to 145.3 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
76582	143.1 to 145.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: W *side of* **EMILY WAY** *Starting at:* **JOYA DR** **$72,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201017	EMILY WAY	STREET END	ALMOND AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75372	2.3 to 3.3 feet	Vertical Change	2.46"	5 ft	5	SF	$75	$375
75380	3.9 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
75381	21.3 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
75382	25.1 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
75383	29.9 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
75384	34.3 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
75373	44.7 to 45.7 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
75385	55.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
75374	64.0 to 65.0 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
75386	68.1 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
75387	78.9 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	325	SF	$120	$39,000
75375	80.0 to 81.0 feet	Vertical Change	2.9"	5 ft	5	REF		
75399	144.8 to 175.4 feet	Key Note Segment		5 ft	153			
75376	175.2 to 176.2 feet	Vertical Change	.27"	5 ft	5	REF		
75388	178.4 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
75389	186.5 to 194.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,800
75390	197.3 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
75391	216.3 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
75392	230.8 to 235.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
75393	246.3 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	$24,600
75394	287.5 to 290.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,740
75395	292.5 to 298.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
75378	296.9 to 297.9 feet	Vertical Change	.34"	5 ft	5	REF		
75396	299.3 to 309.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	$6,060
75397	309.4 to 313.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
75398	313.3 to 314.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
75379	319.6 to 320.6 feet	Vertical Change	1.93"	5 ft	5	SF	$75	$375

TOTAL COST FOR: W *side of* **EMILY WAY** *Starting at:* **STREET END** **$119,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109150849	EXPRESS CT	GLADE AVE	GLADE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66848	0.7 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
66849	13.3 to 16.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
66868	17.0 to 52.6 feet	Key Note Segment		5 ft	178			
66838	18.5 to 19.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
66850	55.8 to 69.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
66851	69.7 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66852	81.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
66853	85.5 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
66854	88.5 to 89.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
66855	92.6 to 99.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
66856	99.8 to 106.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
66869	106.2 to 130.2 feet	Key Note Segment		5 ft	120			
66840	121.8 to 122.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
66857	133.5 to 138.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
66858	138.6 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
66841	146.0 to 147.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
66870	150.6 to 174.0 feet	Key Note Segment		5 ft	117			
66842	176.0 to 177.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
66859	187.9 to 191.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
66845	189.8 to 190.8 feet	**Vertical Change**	.46"	5 ft	5	REF		
66846	192.1 to 193.1 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
66871	192.9 to 215.8 feet	Key Note Segment		5 ft	115			
66847	195.0 to 196.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
66860	216.8 to 218.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
66861	218.0 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
66862	224.0 to 248.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
66863	251.5 to 258.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
66864	260.8 to 271.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109150849	EXPRESS CT	GLADE AVE	GLADE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66865	271.8 to 277.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
66866	277.8 to 279.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
66867	283.3 to 287.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: S / N *side of* **EXPRESS CT** *Starting at:* **GLADE AVE** **$74,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191058	FAIR OAK AVE	EL MONTE AVE	GAMAY AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102967	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102951	1.3 to 2.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
102987	1.9 to 18.6 feet	Key Note Segment		5 ft	84			
102952	15.9 to 16.9 feet	**Vertical Change**	-.44"	5 ft	5	REF		
102953	17.6 to 18.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
102968	21.6 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
102969	22.8 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
102970	27.8 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
102954	30.2 to 31.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
102955	34.6 to 35.6 feet	**Vertical Change**	-.53"	5 ft	5	REF		
102971	52.2 to 61.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
102972	65.4 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
102956	70.0 to 71.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
102988	70.3 to 88.7 feet	Key Note Segment		5 ft	92			
102957	72.3 to 73.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
102973	90.3 to 95.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
102974	97.0 to 101.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
102975	103.1 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
102958	105.7 to 106.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
102989	116.4 to 143.6 feet	Key Note Segment		5 ft	136			
102959	118.4 to 119.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
102976	145.0 to 147.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
102977	150.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102978	154.2 to 175.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
102990	176.0 to 195.5 feet	Key Note Segment		5 ft	98			
102960	179.2 to 180.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
102961	186.5 to 187.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
102979	198.2 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191058	FAIR OAK AVE	EL MONTE AVE	GAMAY AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102991	221.6 to 250.4 feet	Key Note Segment		5 ft	144			
102962	224.2 to 225.2 feet	Vertical Change	.28"	5 ft	5	REF		
102980	252.1 to 272.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**
102981	272.8 to 278.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
102992	278.7 to 297.3 feet	Key Note Segment		5 ft	93			
102982	299.8 to 301.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
102983	305.8 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102984	308.8 to 311.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
102993	312.3 to 331.9 feet	Key Note Segment		5 ft	98			
102963	332.2 to 333.2 feet	Vertical Change	.59"	5 ft	5	REF		
102985	333.1 to 344.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
102964	343.2 to 344.2 feet	Vertical Change	-.32"	5 ft	5	REF		
102994	344.5 to 361.3 feet	Key Note Segment		5 ft	84			
102965	346.1 to 347.1 feet	Vertical Change	.3"	5 ft	5	REF		
102986	363.9 to 365.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102966	367.9 to 368.9 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **FAIR OAK AVE** *Starting at:* **EL MONTE AVE** **$91,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191109	FAIR OAK AVE	GAMAY AVE	EL MONTE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103052	0.0 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
103053	17.2 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
103067	19.6 to 38.5 feet	Key Note Segment		5 ft	94			
103037	20.0 to 21.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
103038	29.8 to 30.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
103039	41.8 to 42.8 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
103054	46.1 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
103055	48.3 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
103056	54.8 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103057	64.6 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
103040	69.2 to 70.2 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
103058	70.9 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
103068	73.9 to 91.6 feet	Key Note Segment		5 ft	88			
103041	84.5 to 85.5 feet	**Vertical Change**	3.55"	5 ft	5	REF		
103059	101.8 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103060	110.1 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
103043	125.1 to 126.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
103069	128.0 to 145.6 feet	Key Note Segment		5 ft	88			
103045	143.2 to 144.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
103046	150.1 to 151.1 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
103061	153.5 to 170.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
103047	160.7 to 161.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
103062	172.8 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
103048	173.7 to 174.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
103049	178.4 to 179.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
103070	179.8 to 199.4 feet	Key Note Segment		5 ft	98			
103050	198.0 to 199.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
103063	202.8 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191109	FAIR OAK AVE	GAMAY AVE	EL MONTE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103071	207.3 to 235.6 feet	Key Note Segment		5 ft	142			
103051	207.8 to 208.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
103064	235.9 to 237.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	9	SF	$40	**$340**
103065	239.3 to 245.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
103066	245.3 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **FAIR OAK AVE** *Starting at:* **GAMAY AVE** **$45,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271248	FAIRFIELD WAY	CURB RAMP	SAN PIETRO DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111044	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
111045	1.1 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111046	4.8 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
111040	10.1 to 11.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111047	21.8 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
111041	31.5 to 32.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111048	44.3 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111049	51.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111050	58.3 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
111051	67.5 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
111052	79.9 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
111053	108.8 to 138.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
111054	140.2 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
111055	158.0 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
111056	187.2 to 188.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
111057	189.7 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111042	196.7 to 197.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111058	200.0 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
111043	213.5 to 214.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111059	245.2 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
111060	268.5 to 297.3 feet	Key Note Segment		5 ft	144			
111061	315.2 to 317.0 feet		5.0-6.0%	5 ft	9			
111062	317.0 to 318.3 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: N *side of* **FAIRFIELD WAY** *Starting at:* **CURB RAMP** **$83,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271252	FAIRFIELD WAY	CURB RAMP	CURB RAMP	13

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111075	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111076	6.3 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
111077	71.2 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **CURB RAMP** **$3,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271254	FAIRFIELD WAY	CURB RAMP	N WESTBERRY BLV	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111078	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111079	20.5 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111080	55.3 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
111081	76.7 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **CURB RAMP** **$8,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261521	FAIRFIELD WAY	HILLSBORO AVE	PENNY WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110018	0.3 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
110019	2.4 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
110020	31.2 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
110021	37.8 to 55.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
110022	55.9 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
110048	84.2 to 121.3 feet	Key Note Segment		5 ft	186			
110005	87.5 to 88.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
110023	122.5 to 127.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
110007	125.0 to 126.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
110024	130.8 to 146.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
110025	146.0 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
110049	155.3 to 184.8 feet	Key Note Segment		5 ft	147			
110008	156.0 to 157.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
110009	166.7 to 167.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
110010	182.4 to 183.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
110026	185.2 to 186.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	5	SF	$40	**$200**
110027	186.8 to 197.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
110028	200.0 to 210.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
110029	210.8 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
110030	221.3 to 228.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
110031	229.9 to 240.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
110032	240.7 to 249.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
110033	252.3 to 254.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
110034	258.4 to 262.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
110050	262.4 to 290.7 feet	Key Note Segment		5 ft	142			
110011	280.9 to 281.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
110035	292.7 to 303.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
110036	307.7 to 310.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261521	FAIRFIELD WAY	HILLSBORO AVE	PENNY WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110051	313.3 to 341.8 feet	Key Note Segment		5 ft	143			
110012	314.4 to 315.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
110037	343.5 to 344.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
110038	344.5 to 364.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
110013	355.4 to 356.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
110039	367.3 to 378.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
110040	378.6 to 379.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
110014	380.6 to 381.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
110041	382.1 to 384.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
110042	386.8 to 412.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
110052	414.2 to 450.7 feet	Key Note Segment		5 ft	183			
110015	417.4 to 418.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
110016	431.1 to 432.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110043	452.3 to 472.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
110044	474.0 to 519.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,180**
110045	521.8 to 522.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
110046	525.0 to 530.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
110047	530.9 to 545.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**

TOTAL COST FOR: N *side of* **FAIRFIELD WAY** *Starting at:* **HILLSBORO AVE** **$196,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261516	FAIRFIELD WAY	KENTON WAY	HILLSBORO AVE	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109997	0.6 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
109998	31.9 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
109999	42.3 to 50.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
110000	50.3 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
110001	57.0 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,280**
110002	82.5 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
110003	96.1 to 172.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	384	SF	$120	**$46,020**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **KENTON WAY** **$96,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261550	FAIRFIELD WAY	LARRETE AVE	N WESTBERRY BLV	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110259	1.8 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
110256	9.0 to 10.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
110260	24.0 to 27.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
110257	31.2 to 32.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
110261	31.9 to 72.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	201	SF	$120	**$24,120**
110258	43.9 to 44.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
110262	74.3 to 83.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
110263	81.8 to 83.5 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: N *side of* **FAIRFIELD WAY** *Starting at:* **LARRETE AVE** **$44,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271245	FAIRFIELD WAY	N WESTBERRY BLV	CURB RAMP	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111035	13.5 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111036	50.8 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111037	57.6 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111034	64.7 to 65.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
111038	71.6 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
111039	79.5 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: N *side of* **FAIRFIELD WAY** *Starting at:* **N WESTBERRY BLV** **$11,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261411	FAIRFIELD WAY	N WESTBERRY BLV	TIBURON WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109550	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
109551	6.5 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
109538	22.9 to 23.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
109552	25.0 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
109553	35.2 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
109539	36.0 to 37.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
109574	43.2 to 72.3 feet	Key Note Segment		5 ft	146			
109540	43.3 to 47.0 feet	**Vertical Change**	.33"	5 ft	19	REF		
109554	74.1 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
109555	76.8 to 87.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
109541	83.6 to 84.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109556	87.3 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
109557	106.9 to 108.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
109558	108.4 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109575	112.0 to 141.0 feet	Key Note Segment		5 ft	145			
109542	141.4 to 142.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
109559	141.8 to 152.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
109560	152.4 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
109543	155.2 to 156.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109576	155.3 to 183.8 feet	Key Note Segment		5 ft	142			
109544	184.3 to 185.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109561	185.8 to 200.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
109562	200.7 to 204.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
109563	204.9 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,140**
109545	210.9 to 211.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
109577	261.8 to 290.3 feet	Key Note Segment		5 ft	143			
109564	291.1 to 297.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
109565	299.7 to 306.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261411	FAIRFIELD WAY	N WESTBERRY BLV	TIBURON WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109578	306.9 to 338.1 feet	Key Note Segment		5 ft	156			
109546	318.1 to 319.1 feet	Vertical Change	.32"	5 ft	5	REF		
109547	327.2 to 328.2 feet	Vertical Change	.27"	5 ft	5	REF		
109548	339.7 to 340.7 feet	Vertical Change	.32"	5 ft	5	REF		
109566	340.0 to 350.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
109567	350.8 to 367.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
109568	371.0 to 375.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
109569	377.6 to 381.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
109549	378.3 to 379.3 feet	Vertical Change	-.27"	5 ft	5	REF		
109570	383.6 to 384.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
109579	385.6 to 415.3 feet	Key Note Segment		5 ft	149			
109571	417.9 to 422.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
109572	422.7 to 437.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
109573	441.3 to 445.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **N WESTBERRY BLV** **$138,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261538	FAIRFIELD WAY	PENNY WAY	LARRETE AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110148	0.0 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,060**
110149	40.1 to 44.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
110150	46.6 to 72.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,720**
110145	51.1 to 52.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
110146	64.4 to 65.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
110151	73.8 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	248	SF	$120	**$29,700**
110152	125.8 to 146.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
110153	147.0 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
110147	153.2 to 154.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
110154	153.9 to 156.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
110155	157.2 to 165.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: N *side of* **FAIRFIELD WAY** *Starting at:* **PENNY WAY** **$94,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271251	FAIRFIELD WAY	SAN PIETRO DR	CURB RAMP	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111068	1.2 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,060**
111069	44.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
111063	47.5 to 48.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
111064	68.1 to 69.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
111070	72.2 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111065	77.5 to 78.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
111071	83.8 to 89.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
111066	91.1 to 92.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
111072	91.7 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
111073	100.8 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
111074	114.9 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
111067	165.2 to 166.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **SAN PIETRO DR** **$62,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261514	FAIRFIELD WAY	TIBURON WAY	KENTON WAY	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109982	0.0 to 5.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
109983	6.5 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
109984	16.5 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
109985	24.0 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
109986	27.5 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
109980	33.6 to 34.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
109987	34.2 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
109988	48.9 to 55.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
109989	56.8 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
109990	72.7 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
109991	91.5 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
109992	101.9 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
109993	145.8 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
109994	148.4 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
109995	158.3 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
109996	164.3 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: S *side of* **FAIRFIELD WAY** *Starting at:* **TIBURON WAY** **$78,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161120	FAIRMONT CT	PAINTBRUSH DR	PAINTBRUSH DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70741	0.8 to 8.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
70742	12.3 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
70743	21.3 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
70763	36.3 to 60.7 feet	Key Note Segment		5 ft	122			
70729	37.4 to 38.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
70744	60.7 to 61.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
70745	66.3 to 67.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
70746	70.3 to 71.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
70730	70.4 to 71.4 feet	**Vertical Change**	1.22"	5 ft	5	REF		
70731	74.4 to 75.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
70747	75.3 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
70748	87.0 to 89.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
70764	89.9 to 116.3 feet	Key Note Segment		5 ft	132			
70732	102.0 to 103.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
70749	144.7 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70765	146.3 to 167.3 feet	Key Note Segment		5 ft	105			
70733	169.7 to 170.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
70750	185.3 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
70766	186.8 to 214.2 feet	Key Note Segment		5 ft	137			
70734	203.3 to 204.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
70735	215.4 to 216.4 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
70736	220.1 to 224.0 feet	**Vertical Change**	.46"	5 ft	20	LF	$75	**$1,463**
70751	221.2 to 225.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
70752	225.8 to 227.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
70767	232.0 to 253.5 feet	Key Note Segment		5 ft	108			
70737	234.3 to 235.3 feet	**Vertical Change**	-.38"	5 ft	5	REF		
70753	261.8 to 266.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
70754	274.2 to 293.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109161120	FAIRMONT CT	PAINTBRUSH DR	PAINTBRUSH DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70738	291.8 to 292.8 feet	Vertical Change	.29"	5 ft	5	REF		
70755	296.0 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
70768	302.3 to 325.0 feet	Key Note Segment		5 ft	114			
70756	325.5 to 329.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
70757	341.3 to 343.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
70739	345.0 to 346.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
70758	355.7 to 364.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
70769	364.0 to 386.3 feet	Key Note Segment		5 ft	112			
70759	386.3 to 387.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$220
70740	398.9 to 399.9 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
70760	402.8 to 409.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
70761	412.2 to 414.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
70762	420.8 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,420
70770	429.8 to 430.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S / N *side of* **FAIRMONT CT** *Starting at:* **PAINTBRUSH DR** **$70,722.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241259	FAIRVIEW AVE	1518 FIFTH ST	FIFTH ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107226	2.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
107221	3.2 to 4.2 feet	**Vertical Change**	2.64"	4 ft	4	REF		
107227	5.6 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$576**
107228	8.3 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
107222	11.4 to 12.4 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
107229	16.0 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
107230	19.7 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
107236	21.3 to 22.3 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
107231	26.2 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	87	SF	$120	**$10,416**
107223	33.3 to 34.3 feet	**Vertical Change**	-.29"	4 ft	4	REF		
107232	51.3 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,896**
107224	63.8 to 64.8 feet	**Vertical Change**	.28"	4 ft	4	REF		
107233	81.3 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	**$9,552**
107237	99.3 to 100.3 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
107225	100.7 to 101.7 feet	**Vertical Change**	.28"	4 ft	4	REF		
107234	111.6 to 112.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
107235	115.7 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **FAIRVIEW AVE** *Starting at:* **1518 FIFTH ST** **$37,074.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241128	FAIRVIEW AVE	1520 FOURTH ST	FOURTH ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107008	6.3 to 20.8 feet	Key Note Segment		4 ft	58			
106986	15.7 to 16.7 feet	Vertical Change	-.47"	4 ft	4	REF		
106987	21.4 to 22.4 feet	Vertical Change	.27"	4 ft	4	REF		
106998	32.9 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
106988	34.8 to 35.8 feet	Vertical Change	.28"	4 ft	4	REF		
106989	42.6 to 43.6 feet	Vertical Change	.29"	4 ft	4	LF	$75	**$300**
106999	44.5 to 45.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
107000	45.5 to 47.5 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	8	SF	$120	**$960**
107001	49.9 to 50.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
106990	50.3 to 51.3 feet	Vertical Change	-.47"	4 ft	4	REF		
107002	52.3 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
107003	53.3 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
106991	58.2 to 59.2 feet	Vertical Change	-.3"	4 ft	4	LF	$75	**$300**
107004	68.7 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	96	SF	$120	**$11,568**
106992	81.0 to 82.0 feet	Vertical Change	.3"	4 ft	4	REF		
106993	89.6 to 90.6 feet	Vertical Change	.42"	4 ft	4	REF		
106994	93.8 to 94.8 feet	Vertical Change	-.45"	4 ft	4	LF	$75	**$300**
106995	95.5 to 99.0 feet	Vertical Change	.26"	4 ft	14	LF	$75	**$1,050**
107005	98.4 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
106996	100.6 to 104.2 feet	Vertical Change	-.28"	4 ft	14	REF		
107006	104.0 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
107007	110.1 to 121.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,328**
106997	110.9 to 111.9 feet	Vertical Change	.32"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **FAIRVIEW AVE** *Starting at:* **1520 FOURTH ST** **$27,246.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241132	FAIRVIEW AVE	1601 FIFTH ST	FIFTH ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107030	1.9 to 26.3 feet	Key Note Segment		4 ft	98			
107022	29.4 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
107023	55.0 to 56.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
107024	56.3 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
107025	66.7 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
107026	78.5 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
107027	91.1 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
107028	103.0 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
107029	112.3 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
107021	122.8 to 123.8 feet	**Vertical Change**	-.32"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **FAIRVIEW AVE** *Starting at:* **1601 FIFTH ST** **$19,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241302	FAIRVIEW AVE	1603 HOWARD RD	HOWARD RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107238	8.3 to 9.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
107252	25.3 to 51.3 feet	Key Note Segment		5 ft	130			
107239	51.2 to 52.2 feet	Vertical Change	.3"	5 ft	5	REF		
107245	52.2 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
107246	54.0 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
107247	67.2 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
107241	79.0 to 80.0 feet	Vertical Change	1.27"	5 ft	5	REF		
107248	79.9 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,540**
107242	96.3 to 97.3 feet	Vertical Change	-.82"	5 ft	5	SF	$75	**$375**
107249	98.2 to 100.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
107250	100.3 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
107243	101.0 to 102.0 feet	Vertical Change	.31"	5 ft	5	REF		
107251	103.5 to 111.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
107244	107.5 to 110.6 feet	Vertical Change	.26"	5 ft	16	REF		

TOTAL COST FOR: W *side of* **FAIRVIEW AVE** *Starting at:* **1603 HOWARD RD** **$21,630.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241126	FAIRVIEW AVE	FIFTH ST	1520 FAIRVIEW AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106972	14.1 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
106973	24.9 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
106982	49.7 to 50.7 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
106974	58.8 to 72.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
106984	69.3 to 70.3 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
106983	72.3 to 73.3 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
106975	74.6 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
106968	75.0 to 76.0 feet	**Vertical Change**	3.13"	4 ft	4	REF		
106976	79.7 to 80.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
106977	81.1 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
106969	88.6 to 89.6 feet	**Vertical Change**	.46"	4 ft	4	LF	$75	**$300**
106970	96.4 to 97.4 feet	**Vertical Change**	.54"	4 ft	4	SF	$75	**$300**
106978	99.0 to 100.4 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	6	SF	$120	**$672**
106979	102.7 to 110.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,744**
106980	110.8 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
106971	112.0 to 113.0 feet	**Vertical Change**	-.34"	4 ft	4	REF		
106981	118.9 to 120.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
106985	121.6 to 122.6 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**

TOTAL COST FOR: E *side of* **FAIRVIEW AVE** *Starting at:* **FIFTH ST** **$22,014.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241130	FAIRVIEW AVE	FOURTH ST	1600 FAIRVIEW AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107012	0.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
107013	21.2 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,408**
107014	42.9 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**
107015	63.3 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
107016	69.8 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
107020	73.0 to 88.2 feet	Key Note Segment		4 ft	61			
107009	89.4 to 90.4 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
107017	92.4 to 94.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
107010	96.5 to 97.5 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
107018	104.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,240**
107011	115.3 to 116.3 feet	**Vertical Change**	.44"	4 ft	4	REF		
107019	120.8 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: W *side of* **FAIRVIEW AVE** *Starting at:* **FOURTH ST** **$31,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261233	FAIRWAY AVE	CURB RAMP	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109101	0.7 to 14.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
109102	15.9 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,500**
109103	20.8 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	134	SF	$120	**$16,080**
109104	47.6 to 54.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
109105	55.1 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	131	SF	$120	**$15,720**
109106	86.9 to 116.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,640**
109107	116.3 to 122.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
109108	122.5 to 130.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
109109	131.3 to 147.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	**$9,420**
109099	133.6 to 134.6 feet	**Vertical Change**	1.13"	5 ft	5	REF		
109100	142.3 to 143.3 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **CURB RAMP** **$81,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261230	FAIRWAY AVE	FARIWAY AVE	CAMINO LN	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109089	0.7 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
109084	8.3 to 9.3 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
109090	12.1 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,420**
109086	33.4 to 34.4 feet	**Vertical Change**	.54"	5 ft	5	REF		
109087	42.7 to 43.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
109088	46.8 to 47.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109091	47.8 to 64.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
109092	67.2 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
109093	73.2 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
109094	83.6 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
109095	100.8 to 111.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
109096	114.1 to 137.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
109097	139.0 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
109098	146.5 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **FARIWAY AVE** **$75,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271107	FAIRWAY AVE	HILLSBORO AVE	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110609	0.1 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
110610	4.3 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
110611	12.0 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
110612	15.6 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
110613	25.4 to 28.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
110659	28.6 to 55.9 feet	Key Note Segment		5 ft	137			
110576	31.2 to 32.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
110614	60.4 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
110615	65.5 to 68.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
110616	68.4 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
110660	97.6 to 131.1 feet	Key Note Segment		5 ft	168			
110577	100.4 to 101.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
110617	131.6 to 134.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
110578	131.9 to 132.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
110618	135.3 to 151.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,540**
110619	152.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
110620	159.0 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	249	SF	$120	**$29,880**
110579	197.7 to 198.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
110661	208.8 to 243.3 feet	Key Note Segment		5 ft	173			
110580	234.6 to 235.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
110621	245.2 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
110581	250.0 to 251.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
110622	258.3 to 266.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
110582	262.8 to 263.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
110623	283.7 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
110583	290.4 to 291.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
110584	295.0 to 296.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
110624	300.8 to 310.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271107	FAIRWAY AVE	HILLSBORO AVE	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110662	311.3 to 340.0 feet	Key Note Segment		5 ft	144			
110669	340.0 to 341.1 feet		5.0-6.0%	5 ft	6			
110585	340.2 to 341.2 feet	Vertical Change	.35"	5 ft	5	REF		
110625	345.7 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
110670	351.3 to 352.3 feet	Continuous Width	36"	5 ft	5	SF	$120	$600
110626	351.8 to 362.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
110627	367.1 to 372.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
110663	372.2 to 406.3 feet	Key Note Segment		5 ft	171			
110586	372.7 to 373.7 feet	Vertical Change	-.34"	5 ft	5	REF		
110587	381.5 to 382.5 feet	Vertical Change	-.33"	5 ft	5	REF		
110588	397.2 to 398.2 feet	Vertical Change	.33"	5 ft	5	REF		
110628	408.3 to 421.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$8,040
110629	423.9 to 446.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,560
110589	429.9 to 430.9 feet	Vertical Change	.3"	5 ft	5	REF		
110590	443.3 to 444.3 feet	Vertical Change	.36"	5 ft	5	REF		
110630	453.2 to 456.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
110631	459.8 to 471.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
110632	474.7 to 480.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,180
110633	480.4 to 481.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
110591	483.2 to 484.2 feet	Vertical Change	.27"	5 ft	5	REF		
110634	483.7 to 489.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
110635	490.7 to 529.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	$23,340
110592	496.1 to 497.1 feet	Vertical Change	.29"	5 ft	5	REF		
110664	530.0 to 557.8 feet	Key Note Segment		5 ft	139			
110593	532.8 to 533.8 feet	Vertical Change	.38"	5 ft	5	REF		
110594	549.0 to 550.0 feet	Vertical Change	-.3"	5 ft	5	REF		
110595	555.8 to 556.8 feet	Vertical Change	.31"	5 ft	5	REF		
110636	559.9 to 561.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271107	FAIRWAY AVE	HILLSBORO AVE	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110596	560.6 to 561.6 feet	Vertical Change	-.31"	5 ft	5	REF		
110637	570.7 to 571.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
110638	587.3 to 596.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340
110597	589.2 to 590.2 feet	Vertical Change	.26"	5 ft	5	REF		
110639	598.7 to 625.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	$15,960
110598	612.3 to 613.3 feet	Vertical Change	.34"	5 ft	5	REF		
110640	628.4 to 642.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,640
110665	642.8 to 673.7 feet	Key Note Segment		5 ft	155			
110641	675.8 to 677.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
110642	680.3 to 681.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$720
110643	682.6 to 692.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	$6,180
110599	690.5 to 691.5 feet	Vertical Change	.28"	5 ft	5	REF		
110644	695.4 to 702.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
110645	706.5 to 712.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
110646	715.1 to 717.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
110666	717.4 to 754.8 feet	Key Note Segment		5 ft	187			
110600	717.7 to 721.4 feet	Vertical Change	-.27"	5 ft	19	REF		
110601	729.9 to 730.9 feet	Vertical Change	.37"	5 ft	5	REF		
110602	745.9 to 746.9 feet	Vertical Change	.47"	5 ft	5	REF		
110603	754.6 to 755.6 feet	Vertical Change	-.27"	5 ft	5	REF		
110647	757.1 to 760.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
110604	765.0 to 766.0 feet	Vertical Change	-.29"	5 ft	5	REF		
110648	765.1 to 775.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
110649	778.0 to 783.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
110650	791.7 to 794.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
110605	798.0 to 799.0 feet	Vertical Change	.27"	5 ft	5	REF		
110651	798.0 to 800.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
110652	801.4 to 818.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,440

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271107	FAIRWAY AVE	HILLSBORO AVE	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110667	818.8 to 847.8 feet	Key Note Segment		5 ft	145			
110606	846.0 to 847.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
110653	849.9 to 853.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
110654	855.3 to 857.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
110655	857.8 to 889.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
110607	884.2 to 885.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
110656	894.0 to 903.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
110608	894.7 to 895.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
110668	905.0 to 933.3 feet	Key Note Segment		5 ft	142			
110657	934.6 to 947.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
110658	947.8 to 970.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**

TOTAL COST FOR: N *side of* **FAIRWAY AVE** *Starting at:* **HILLSBORO AVE** **$283,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271111	FAIRWAY AVE	LARRETE AVE	PENNY WAY	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110689	0.7 to 4.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
110690	10.8 to 20.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
110691	24.1 to 33.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
110684	31.6 to 32.6 feet	**Vertical Change**	1.18"	5 ft	5	REF		
110692	36.1 to 37.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
110693	39.5 to 56.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	85	SF	$120	**$10,200**
110694	56.7 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
110686	69.5 to 70.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
110695	74.8 to 85.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
110696	87.3 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	193	SF	$120	**$23,100**
110687	94.8 to 95.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110697	128.0 to 129.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
110698	131.5 to 148.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	87	SF	$120	**$10,440**
110699	151.8 to 190.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	195	SF	$120	**$23,400**
110688	191.2 to 192.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **LARRETE AVE** **$97,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271131	FAIRWAY AVE	MANDANA WAY	HILLSBORO AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110839	0.9 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
110840	9.0 to 30.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
110825	22.0 to 23.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
110851	32.3 to 61.1 feet	Key Note Segment		5 ft	144			
110826	52.4 to 53.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
110827	61.5 to 62.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
110841	68.3 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
110852	74.8 to 110.6 feet	Key Note Segment		5 ft	179			
110829	84.3 to 85.3 feet	**Vertical Change**	.54"	5 ft	5	REF		
110830	108.4 to 109.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
110831	110.1 to 111.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
110842	113.2 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
110832	117.5 to 118.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
110843	120.5 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
110844	125.8 to 134.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
110833	126.4 to 127.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
110845	136.8 to 144.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
110846	145.8 to 147.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
110853	148.9 to 187.0 feet	Key Note Segment		5 ft	191			
110834	178.5 to 179.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
110847	189.0 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	199	SF	$120	**$23,880**
110835	205.9 to 206.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
110854	230.0 to 257.2 feet	Key Note Segment		5 ft	136			
110836	231.3 to 232.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
110837	255.8 to 256.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
110838	258.4 to 259.4 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
110848	260.2 to 261.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
110849	261.6 to 284.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271131	FAIRWAY AVE	MANDANA WAY	HILLSBORO AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110850	290.6 to 297.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **MANDANA WAY** **$79,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271109	FAIRWAY AVE	N WESTBERRY BLV	LARRETE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110675	0.0 to 6.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
110676	6.3 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
110671	8.5 to 9.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
110677	13.7 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
110672	21.2 to 22.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
110678	24.8 to 30.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
110679	33.8 to 37.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
110680	42.0 to 58.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
110673	55.8 to 56.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
110681	59.7 to 62.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
110682	67.3 to 74.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
110683	77.9 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
110674	82.0 to 83.0 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **N WESTBERRY BLV** **$37,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271114	FAIRWAY AVE	PENNY WAY	MANDANA WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110703	0.0 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
110704	7.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
110705	27.8 to 93.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	327	SF	$120	**$39,180**
110706	93.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
110707	104.1 to 147.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	215	SF	$120	**$25,740**
110701	135.8 to 136.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
110708	148.5 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
110702	149.0 to 150.0 feet	**Vertical Change**	.58"	5 ft	5	REF		
110709	184.5 to 186.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: S *side of* **FAIRWAY AVE** *Starting at:* **PENNY WAY** **$107,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261228	FAIRWAY AVE	WESTBERRY BVD	3356 FAIRWAY AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109043	3.9 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
109082	12.8 to 13.8 feet	Continuous Width	36"	5 ft	5	SF	$120	**$600**
109044	18.9 to 25.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
109020	21.9 to 22.9 feet	Vertical Change	.4"	5 ft	5	REF		
109079	22.3 to 23.3 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
109080	26.6 to 27.6 feet	Protruding Object	48"	5 ft	5	JOB	$99	**$99**
109045	28.4 to 37.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
109046	37.4 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
109021	41.4 to 42.4 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
109047	45.0 to 52.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
109022	46.2 to 47.2 feet	Vertical Change	.48"	5 ft	5	REF		
109083	48.4 to 49.4 feet	Continuous Width	36"	5 ft	5	SF	$120	**$600**
109048	52.5 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
109023	55.9 to 56.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
109049	57.7 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
109050	64.4 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
109051	66.0 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109024	67.6 to 68.6 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
109052	72.0 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
109053	79.5 to 80.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
109054	81.7 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
109025	96.9 to 97.9 feet	Vertical Change	1.12"	5 ft	5	REF		
109026	98.7 to 99.7 feet	Vertical Change	.46"	5 ft	5	REF		
109027	100.4 to 101.4 feet	Vertical Change	.95"	5 ft	5	SF	$75	**$375**
109028	102.3 to 103.3 feet	Vertical Change	-.28"	5 ft	5	REF		
109055	102.8 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
109029	110.4 to 111.4 feet	Vertical Change	1.48"	5 ft	5	REF		
109056	111.2 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261228	FAIRWAY AVE	WESTBERRY BVD	3356 FAIRWAY AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109057	129.8 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
109030	139.9 to 140.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
109058	141.1 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
109031	145.3 to 146.3 feet	**Vertical Change**	1.49"	5 ft	5	REF		
109032	149.0 to 150.0 feet	**Vertical Change**	1.19"	5 ft	5	REF		
109059	156.6 to 167.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
109033	168.3 to 169.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
109060	169.4 to 170.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
109078	170.8 to 193.9 feet	Key Note Segment		5 ft	116			
109061	198.9 to 203.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
109034	205.4 to 206.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
109062	205.6 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
109063	213.9 to 222.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
109035	219.5 to 222.6 feet	**Vertical Change**	.4"	5 ft	16	REF		
109064	223.5 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
109036	224.1 to 225.1 feet	**Vertical Change**	.76"	5 ft	5	REF		
109065	233.1 to 247.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
109066	253.3 to 260.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
109067	266.4 to 267.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
109068	271.8 to 273.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
109069	275.6 to 277.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
109037	276.6 to 277.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
109070	281.9 to 293.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
109071	293.4 to 302.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
109038	296.9 to 297.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
109072	302.4 to 306.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
109073	306.3 to 310.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
109074	310.5 to 314.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261228	FAIRWAY AVE	WESTBERRY BVD	3356 FAIRWAY AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109075	317.3 to 342.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	**$15,000**
109039	328.0 to 329.0 feet	**Vertical Change**	2.93"	5 ft	5	REF		
109040	332.5 to 333.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
109041	336.6 to 337.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
109076	342.3 to 348.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
109042	350.0 to 351.0 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
109077	351.3 to 369.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
109081	364.3 to 365.3 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: N *side of* **FAIRWAY AVE** *Starting at:* **WESTBERRY BVD** **$157,707.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201456	FICKLIN DR	CHATOM WY	GOOSECROSS DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77047	4.8 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
77063	22.1 to 43.5 feet	Key Note Segment		5 ft	107			
77048	49.5 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
77040	57.3 to 60.2 feet	**Vertical Change**	.33"	5 ft	15	REF		
77049	58.3 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
77050	62.2 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
77051	67.2 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
77064	74.6 to 95.8 feet	Key Note Segment		5 ft	106			
77052	96.3 to 98.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
77041	97.4 to 98.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
77065	99.0 to 122.0 feet	Key Note Segment		5 ft	115			
77042	107.1 to 108.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
77043	114.0 to 115.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77053	122.0 to 124.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
77054	126.8 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
77055	137.8 to 141.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
77056	168.8 to 171.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
77066	177.3 to 199.3 feet	Key Note Segment		5 ft	110			
77067	203.0 to 224.9 feet	Key Note Segment		5 ft	110			
77057	235.8 to 237.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77044	264.2 to 265.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
77045	272.9 to 273.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
77068	281.6 to 302.7 feet	Key Note Segment		5 ft	105			
77046	305.5 to 306.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
77058	305.7 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77069	308.3 to 329.5 feet	Key Note Segment		5 ft	106			
77059	330.1 to 340.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,140**
77060	345.2 to 351.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201456	FICKLIN DR	CHATOM WY	GOOSECROSS DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77061	363.6 to 370.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
77062	373.5 to 375.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
77070	375.8 to 397.3 feet	Key Note Segment		5 ft	108			

TOTAL COST FOR: S *side of* **FICKLIN DR** *Starting at:* **CHATOM WY** **$34,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201450	FICKLIN DR	COSENTINO DR	CHATOM WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77001	1.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
77002	3.7 to 6.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
76981	7.1 to 8.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
77003	8.2 to 13.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
77004	15.3 to 17.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
76983	27.5 to 28.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
76984	32.0 to 33.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
77022	32.0 to 55.0 feet	Key Note Segment		5 ft	115			
76985	40.0 to 41.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
76986	47.3 to 48.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76987	61.8 to 62.8 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
77005	77.6 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
77006	90.0 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
76988	96.4 to 97.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
77007	97.8 to 99.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
77008	99.7 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
76989	104.3 to 105.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
76990	112.6 to 113.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
76991	121.3 to 122.3 feet	**Vertical Change**	.53"	5 ft	5	REF		
77023	122.1 to 144.7 feet	Key Note Segment		5 ft	113			
77009	145.3 to 146.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
77010	150.2 to 165.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
76992	157.7 to 158.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
76993	166.5 to 167.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
77024	175.1 to 195.6 feet	Key Note Segment		5 ft	103			
76994	182.0 to 183.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
77025	201.0 to 222.3 feet	Key Note Segment		5 ft	107			
76995	207.8 to 208.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201450	FICKLIN DR	COSENTINO DR	CHATOM WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77011	222.8 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
77012	228.4 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
77013	239.9 to 245.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
76996	246.2 to 247.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
77014	249.3 to 252.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
77015	256.1 to 259.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
77016	261.9 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
77017	275.4 to 277.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
76997	276.7 to 277.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
77026	277.9 to 299.3 feet	Key Note Segment		5 ft	107			
77027	303.7 to 326.0 feet	Key Note Segment		5 ft	112			
77018	329.6 to 334.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
77019	340.9 to 349.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
76998	348.6 to 349.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
77028	356.8 to 378.3 feet	Key Note Segment		5 ft	108			
77020	382.9 to 388.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
77021	392.3 to 401.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
76999	392.8 to 393.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
77000	401.3 to 402.3 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **FICKLIN DR** *Starting at:* **COSENTINO DR** **$72,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201515	FICKLIN DR	GOOSECROSS DR	COSENTINO DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77193	1.8 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
77194	7.1 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
77166	18.8 to 19.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
77195	22.6 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77196	26.0 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
77167	29.6 to 30.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
77229	30.8 to 52.3 feet	Key Note Segment		5 ft	108			
77168	53.1 to 54.1 feet	**Vertical Change**	-.63"	5 ft	5	SF	$75	**$375**
77197	61.2 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
77198	71.9 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77169	74.1 to 75.1 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
77199	77.5 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
77230	81.9 to 103.1 feet	Key Note Segment		5 ft	106			
77170	89.8 to 90.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
77231	107.7 to 129.2 feet	Key Note Segment		5 ft	107			
77171	115.0 to 116.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
77200	130.0 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
77201	155.3 to 156.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
77172	160.0 to 161.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77202	160.7 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
77203	178.4 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
77173	184.7 to 185.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77232	186.0 to 207.0 feet	Key Note Segment		5 ft	105			
77174	192.9 to 193.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
77204	207.3 to 211.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
77175	210.8 to 211.8 feet	**Vertical Change**	-.37"	5 ft	5	REF		
77233	212.3 to 232.8 feet	Key Note Segment		5 ft	103			
77176	226.2 to 227.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201515	FICKLIN DR	GOOSECROSS DR	COSENTINO DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77205	233.2 to 234.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$240**
77206	234.4 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
77207	240.7 to 248.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
77208	264.8 to 269.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
77209	277.0 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
77177	289.4 to 290.4 feet	Vertical Change	-.27"	5 ft	5	REF		
77234	289.8 to 310.1 feet	Key Note Segment		5 ft	102			
77178	296.9 to 297.9 feet	Vertical Change	.32"	5 ft	5	REF		
77210	310.9 to 315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
77179	314.6 to 315.6 feet	Vertical Change	-.27"	5 ft	5	REF		
77235	315.5 to 336.1 feet	Key Note Segment		5 ft	103			
77211	337.2 to 338.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
77212	354.6 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
77213	383.2 to 390.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
77236	392.8 to 414.1 feet	Key Note Segment		5 ft	107			
77180	399.6 to 400.6 feet	Vertical Change	.31"	5 ft	5	REF		
77237	419.0 to 439.3 feet	Key Note Segment		5 ft	102			
77214	440.1 to 441.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
77182	446.4 to 447.4 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$375**
77215	454.5 to 456.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
77183	461.5 to 462.5 feet	Vertical Change	-.37"	5 ft	5	REF		
77216	462.5 to 464.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
77217	467.1 to 483.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
77218	486.4 to 494.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
77238	495.8 to 516.5 feet	Key Note Segment		5 ft	104			
77184	509.9 to 510.9 feet	Vertical Change	.32"	5 ft	5	REF		
77219	517.6 to 521.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
77185	518.2 to 519.2 feet	Vertical Change	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201515	FICKLIN DR	GOOSECROSS DR	COSENTINO DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77239	521.8 to 542.6 feet	Key Note Segment		5 ft	104			
77186	535.6 to 536.6 feet	Vertical Change	.27"	5 ft	5	REF		
77220	543.8 to 550.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
77221	553.8 to 562.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
77222	565.1 to 584.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,820**
77223	591.7 to 597.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
77240	599.9 to 619.8 feet	Key Note Segment		5 ft	99			
77187	620.8 to 621.8 feet	Vertical Change	1.1"	5 ft	5	REF		
77224	621.0 to 624.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
77241	624.7 to 646.1 feet	Key Note Segment		5 ft	107			
77188	638.9 to 639.9 feet	Vertical Change	.27"	5 ft	5	REF		
77225	651.0 to 658.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
77226	662.0 to 663.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
77189	675.8 to 676.8 feet	Vertical Change	.41"	5 ft	5	LF	$75	**$375**
77242	676.9 to 698.5 feet	Key Note Segment		5 ft	108			
77190	684.1 to 685.1 feet	Vertical Change	.28"	5 ft	5	REF		
77227	703.5 to 717.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
77191	708.3 to 709.3 feet	Vertical Change	.5"	5 ft	5	REF		
77192	716.9 to 717.9 feet	Vertical Change	.32"	5 ft	5	REF		
77228	719.6 to 734.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**

TOTAL COST FOR: N *side of* **FICKLIN DR** *Starting at:* **GOOSECROSS DR** **$130,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171045	FIESTA DR	944 FIESTA DR	CAITLAN DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88826	7.7 to 8.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
88827	16.3 to 17.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
88829	19.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
88828	19.5 to 20.5 feet	Vertical Change	-.35"	5 ft	5	REF		
88830	23.8 to 34.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	$6,540
88831	40.7 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,700
88832	47.6 to 67.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	$12,060
88833	70.1 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
88834	77.3 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
88835	79.3 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$780

TOTAL COST FOR: S *side of* **FIESTA DR** *Starting at:* **944 FIESTA DR** **$28,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171043	FIESTA DR	CAITLAN DR	970 FIESTA DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88820	0.3 to 23.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$13,980**
88817	22.3 to 23.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
88821	24.5 to 50.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	132	SF	$120	**$15,780**
88818	46.8 to 47.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
88822	53.6 to 54.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
88823	58.3 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
88824	64.9 to 70.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
88819	70.8 to 71.8 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
88825	72.8 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**

TOTAL COST FOR: N *side of* **FIESTA DR** *Starting at:* **CAITLAN DR** **$39,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241110	FIFTH ST	1415 FIFTH ST	ROTAN AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106891	1.9 to 10.8 feet	Key Note Segment		4 ft	36			
106879	11.6 to 12.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
106882	12.3 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
106880	13.9 to 14.9 feet	**Vertical Change**	.56"	4 ft	4	REF		
106883	21.5 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
106884	26.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,384**
106881	29.5 to 30.5 feet	**Vertical Change**	-.26"	4 ft	4	REF		
106885	43.4 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
106886	55.6 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
106887	65.6 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	169	SF	$120	**$20,256**
106888	110.8 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
106889	114.1 to 118.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,872**
106890	118.0 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**

TOTAL COST FOR: N *side of* **FIFTH ST** *Starting at:* **1415 FIFTH ST** **$41,952.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241201	FIFTH ST	1608 FIFTH ST	1604 FIFTH ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107105	3.5 to 4.5 feet	Vertical Change	.3"	4 ft	4	LF	$75	**$300**
107111	27.6 to 38.4 feet	Key Note Segment		4 ft	43			
107106	33.3 to 34.3 feet	Vertical Change	.32"	4 ft	4	REF		
107107	39.6 to 40.6 feet	Vertical Change	1.04"	4 ft	4	SF	$75	**$300**
107110	62.6 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
107108	63.8 to 64.8 feet	Vertical Change	-.48"	4 ft	4	REF		
107109	73.4 to 74.4 feet	Vertical Change	.32"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **FIFTH ST** *Starting at:* **1608 FIFTH ST** **$2,772.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241347	FIFTH ST	1711 FIFTH ST	WILLIAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107384	0.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
107379	1.9 to 2.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
107389	6.0 to 19.4 feet	Key Note Segment		5 ft	67			
107380	32.1 to 33.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
107385	32.6 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
107381	37.8 to 38.8 feet	**Vertical Change**	-.77"	5 ft	5	SF	$75	**$375**
107386	39.2 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,260**
107382	53.3 to 56.2 feet	**Vertical Change**	-.27"	5 ft	15	LF	$75	**$1,088**
107383	58.4 to 59.4 feet	**Vertical Change**	-.43"	5 ft	5	REF		
107387	63.5 to 64.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
107388	66.7 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,340**

TOTAL COST FOR: N *side of* **FIFTH ST** *Starting at:* **1711 FIFTH ST** **$27,982.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241135	FIFTH ST	FAIRVIEW AVE	1611 FIFTH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107037	0.7 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	**$13,248**
107031	26.2 to 27.2 feet	**Vertical Change**	.43"	4 ft	4	LF	$75	**$300**
107038	32.4 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,288**
107032	32.7 to 33.7 feet	**Vertical Change**	.56"	4 ft	4	REF		
107033	67.4 to 68.4 feet	**Vertical Change**	.53"	4 ft	4	SF	$75	**$300**
107034	76.0 to 77.0 feet	**Vertical Change**	.4"	4 ft	4	LF	$75	**$300**
107039	77.6 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
107035	92.9 to 93.9 feet	**Vertical Change**	.47"	4 ft	4	LF	$75	**$300**
107036	99.4 to 100.4 feet	**Vertical Change**	3.11"	4 ft	4	SF	$75	**$300**

TOTAL COST FOR: N *side of* **FIFTH ST** *Starting at:* **FAIRVIEW AVE** **$22,524.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241205	FIFTH ST	FAIRVIEW AVE	ROTAN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107118	0.6 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$2,976**
107119	8.2 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
107112	29.6 to 30.6 feet	**Vertical Change**	-.43"	4 ft	4	LF	$75	**$300**
107120	31.2 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
107121	39.4 to 42.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,584**
107113	39.8 to 40.8 feet	**Vertical Change**	.26"	4 ft	4	REF		
107122	43.3 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
107123	60.9 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
107132	66.2 to 81.1 feet	Key Note Segment		4 ft	60			
107124	99.5 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
107125	112.8 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
107133	127.6 to 139.3 feet	Key Note Segment		4 ft	47			
107126	139.3 to 141.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$304**
107114	145.9 to 146.9 feet	**Vertical Change**	.45"	4 ft	4	LF	$75	**$300**
107115	156.7 to 157.7 feet	**Vertical Change**	.35"	4 ft	4	REF		
107127	157.1 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
107116	183.0 to 184.0 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
107134	188.7 to 199.6 feet	Key Note Segment		4 ft	44			
107128	201.0 to 211.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
107129	218.3 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
107130	228.5 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
107131	245.3 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
107117	248.4 to 249.4 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **FIFTH ST** *Starting at:* **FAIRVIEW AVE** **$37,888.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181611	FIFTH ST	N G ST	N GATEWAY DR	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38283	7.9 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,944**
38284	28.6 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,608**
38285	39.9 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
38286	49.3 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
38287	53.8 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	45	SF	$120	**$5,400**
38281	80.1 to 81.1 feet	Vertical Change	-.26"	6 ft	6	LF	$75	**$450**
38288	83.8 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	40	SF	$120	**$4,752**
38303	126.9 to 146.5 feet	Key Note Segment		6 ft	118			
38289	149.5 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
38290	151.8 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	15	SF	$120	**$1,800**
38291	154.3 to 157.9 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	22	SF	$120	**$2,592**
38304	158.7 to 172.3 feet	Key Note Segment		6 ft	82			
38292	172.9 to 180.3 feet	Cross Slope (PAR)	8.0-9.0%	6 ft	44	SF	$120	**$5,328**
38293	180.3 to 182.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	10	SF	$120	**$1,224**
38294	182.0 to 192.7 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	64	SF	$120	**$7,704**
38295	192.7 to 194.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,152**
38296	195.1 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,512**
38297	199.6 to 208.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	56	SF	$120	**$6,696**
38305	209.8 to 223.2 feet	Key Note Segment		6 ft	80			
38298	225.8 to 228.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
38299	238.7 to 241.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,088**
38300	244.7 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	73	SF	$120	**$8,712**
38301	259.8 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	59	SF	$120	**$7,056**
38302	272.3 to 277.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,528**

TOTAL COST FOR: SE *side of* **FIFTH ST** *Starting at:* **N G ST** **$75,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181614	FIFTH ST	N GATEWAY DR	N G ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38312	1.4 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
38313	18.8 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38314	21.8 to 26.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
38315	27.4 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
38306	44.3 to 45.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38328	47.2 to 58.3 feet	Key Note Segment		5 ft	56			
38316	62.3 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
38307	77.4 to 78.4 feet	**Vertical Change**	3.5"	5 ft	5	SF	$75	**$375**
38308	87.3 to 88.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
38317	90.3 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38329	91.5 to 108.9 feet	Key Note Segment		5 ft	87			
38318	108.9 to 115.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,380**
38319	127.6 to 129.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38330	129.1 to 147.4 feet	Key Note Segment		5 ft	92			
38309	147.7 to 148.7 feet	**Vertical Change**	-.49"	5 ft	5	REF		
38320	148.3 to 149.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
38321	149.8 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38322	154.8 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,100**
38323	178.7 to 199.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
38324	199.9 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
38325	212.2 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
38326	224.4 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
38311	227.8 to 228.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
38331	230.4 to 256.8 feet	Key Note Segment		5 ft	132			
38327	257.7 to 275.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**

TOTAL COST FOR: NW *side of* **FIFTH ST** *Starting at:* **N GATEWAY DR** **$77,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241123	FIFTH ST	ROTAN AVE	FAIRVIEW AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106946	0.0 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
106947	4.7 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
106935	5.2 to 6.2 feet	**Vertical Change**	-.37"	4 ft	4	REF		
106948	9.9 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
106949	13.8 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
106950	17.4 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
106936	20.6 to 21.6 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**
106951	22.8 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	**$13,200**
106937	41.9 to 42.9 feet	**Vertical Change**	-.32"	4 ft	4	REF		
106938	48.4 to 49.4 feet	**Vertical Change**	.4"	4 ft	4	REF		
106952	53.1 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
106964	59.0 to 68.6 feet	Key Note Segment		4 ft	38			
106939	60.2 to 61.2 feet	**Vertical Change**	.26"	4 ft	4	REF		
106953	68.8 to 71.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	12	SF	$40	**$480**
106954	74.9 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
106965	91.0 to 105.5 feet	Key Note Segment		4 ft	58			
106940	91.7 to 92.7 feet	**Vertical Change**	.53"	4 ft	4	REF		
106955	107.7 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,632**
106941	115.1 to 116.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
106956	128.9 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	102	SF	$120	**$12,240**
106942	151.3 to 152.3 feet	**Vertical Change**	.32"	4 ft	4	REF		
106966	157.1 to 172.8 feet	Key Note Segment		4 ft	63			
106943	173.8 to 174.8 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**
106957	177.5 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
106958	186.1 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
106944	189.2 to 190.2 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
106959	191.5 to 203.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
106945	194.3 to 195.3 feet	**Vertical Change**	.26"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241123	FIFTH ST	ROTAN AVE	FAIRVIEW AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106960	206.8 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
106961	212.2 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
106962	234.4 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
106963	242.8 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**

TOTAL COST FOR: N *side of* **FIFTH ST** *Starting at:* **ROTAN AVE** **$63,444.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241107	FIFTH ST	ROTAN AVE	1404 FIFTH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106863	2.1 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,428**
106864	14.6 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
106865	24.1 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,148**
106854	30.2 to 31.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
106866	56.2 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
106855	58.1 to 59.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
106867	61.5 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,046**
106856	79.8 to 80.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$338**
106875	87.8 to 93.3 feet	Key Note Segment		5 ft	25			
106868	93.3 to 100.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,314**
106857	94.7 to 95.7 feet	**Vertical Change**	1.91"	5 ft	5	REF		
106878	101.2 to 102.3 feet		5.0-6.0%	5 ft	5			
106869	131.8 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
106876	134.4 to 141.6 feet	Key Note Segment		5 ft	32			
106870	150.3 to 158.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,374**
106858	159.2 to 160.2 feet	**Vertical Change**	.62"	5 ft	5	REF		
106871	159.3 to 160.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$756**
106872	160.7 to 162.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
106873	163.5 to 168.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,646**
106859	166.3 to 167.3 feet	**Vertical Change**	.59"	5 ft	5	REF		
106860	175.4 to 176.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
106874	177.3 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
106877	178.5 to 185.4 feet	Key Note Segment		5 ft	31			
106861	179.4 to 180.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
106862	182.9 to 183.9 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **FIFTH ST** *Starting at:* **ROTAN AVE** **$40,707.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101308	FIG AVE	116 FIG AVE	CROSS ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131641	0.5 to 13.3 feet	Key Note Segment		4 ft	51			
131629	0.9 to 1.9 feet	**Vertical Change**	-.33"	4 ft	4	REF		
131633	15.3 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
131634	21.3 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
131635	36.1 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
131630	37.1 to 38.1 feet	**Vertical Change**	-.27"	4 ft	4	REF		
131642	44.4 to 57.8 feet	Key Note Segment		4 ft	54			
131636	60.8 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	92	SF	$120	**$10,992**
131631	77.2 to 78.2 feet	**Vertical Change**	2.6"	4 ft	4	REF		
131643	85.1 to 119.6 feet	Key Note Segment		4 ft	138			
131637	122.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,944**
131638	148.6 to 151.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
131639	152.7 to 157.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
131632	153.4 to 154.4 feet	**Vertical Change**	.43"	4 ft	4	REF		
131640	159.0 to 169.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **116 FIG AVE** **$37,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101305	FIG AVE	123 FIG AVE	117 FIG AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131626	0.0 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
131628	6.7 to 24.1 feet	Key Note Segment		5 ft	87			
131627	25.6 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **123 FIG AVE** **$4,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101301	FIG AVE	311 FIG AVE	301 FIG AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131601	0.2 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
131600	13.8 to 14.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
131602	17.6 to 24.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,280**
131614	24.5 to 37.9 feet	Key Note Segment		5 ft	67			
131603	40.9 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
131604	45.0 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131615	46.9 to 57.9 feet	Key Note Segment		5 ft	55			
131605	58.0 to 63.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	30	SF	$40	**$1,180**
131606	64.5 to 71.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
131607	71.6 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
131608	83.3 to 92.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
131609	93.2 to 98.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
131610	98.8 to 105.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
131611	105.1 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
131612	107.3 to 110.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
131616	110.8 to 123.6 feet	Key Note Segment		5 ft	64			
131613	125.0 to 126.1 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **311 FIG AVE** **$40,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101448	FIG AVE	312 FIG AVE	330 FIG AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132042	0.2 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
132040	0.9 to 1.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
132044	2.2 to 13.9 feet	Key Note Segment		5 ft	58			
132041	23.3 to 24.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
132045	35.6 to 49.1 feet	Key Note Segment		5 ft	68			
132043	50.2 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **312 FIG AVE** **$3,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101304	FIG AVE	321 FIG AVE	129 FIG AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131617	0.8 to 1.8 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
131621	5.7 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
131622	15.8 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
131624	16.9 to 35.3 feet	Key Note Segment		5 ft	92			
131618	26.6 to 27.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
131623	41.8 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
131619	50.7 to 51.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
131620	59.9 to 60.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
131625	62.3 to 80.1 feet	Key Note Segment		5 ft	89			

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **321 FIG AVE** **$15,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101259	FIG AVE	325 FIG AVE	325 FIG AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131595	0.4 to 1.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
131599	3.2 to 22.9 feet	Key Note Segment		5 ft	99			
131594	19.8 to 20.8 feet	**Vertical Change**	.72"	5 ft	5	REF		
131596	23.9 to 29.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
131597	29.9 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
131598	39.2 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **325 FIG AVE** **$5,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101450	FIG AVE	326 FIG AVE	326 FIG AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132050	1.1 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
132046	3.3 to 4.3 feet	**Vertical Change**	.43"	4 ft	4	REF		
132051	9.2 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
132052	20.4 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,704**
132047	22.2 to 23.2 feet	**Vertical Change**	1.9"	4 ft	4	REF		
132048	27.2 to 28.2 feet	**Vertical Change**	-.32"	4 ft	4	REF		
132049	29.9 to 30.9 feet	**Vertical Change**	.46"	4 ft	4	REF		
132053	34.2 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
132055	36.4 to 49.3 feet	Key Note Segment		4 ft	52			
132054	51.3 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **326 FIG AVE** **$11,472.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101456	FIG AVE	410 FIG AVE	410 FIG AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132071	0.0 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$5,040**
132069	5.3 to 6.3 feet	**Vertical Change**	.34"	4 ft	4	REF		
132074	10.5 to 25.1 feet	Key Note Segment		4 ft	58			
132072	29.8 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
132073	32.3 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
132070	35.4 to 39.3 feet	**Vertical Change**	.29"	4 ft	16	LF	$75	**$1,170**

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **410 FIG AVE** **$8,418.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101502	FIG AVE	420 FIG AVE	441 FIG AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132075	0.1 to 1.1 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
132093	1.3 to 13.8 feet	Key Note Segment		5 ft	63			
132081	16.6 to 24.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
132082	24.0 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,220
132076	27.0 to 28.0 feet	Vertical Change	-.28"	5 ft	5	REF		
132083	44.8 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,480
132077	66.8 to 67.8 feet	Vertical Change	1.08"	5 ft	5	SF	$75	$375
132084	69.8 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
132085	75.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
132094	79.1 to 92.6 feet	Key Note Segment		5 ft	68			
132078	91.0 to 92.0 feet	Vertical Change	2.72"	5 ft	5	REF		
132086	94.4 to 98.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
132079	97.5 to 98.5 feet	Vertical Change	3.21"	5 ft	5	REF		
132087	98.4 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
132088	113.6 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
132095	124.3 to 139.3 feet	Key Note Segment		5 ft	75			
132089	140.9 to 153.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	$7,320
132080	145.7 to 146.7 feet	Vertical Change	-.3"	5 ft	5	REF		
132090	154.7 to 181.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	134	SF	$120	$16,020
132091	182.0 to 183.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
132092	183.5 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,400

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **420 FIG AVE** **$73,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101513	FIG AVE	431 FIG AVE	AVILA WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132113	3.7 to 23.7 feet	Key Note Segment		5 ft	100			
132107	12.5 to 13.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
132110	27.3 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132111	32.6 to 33.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
132114	35.3 to 55.6 feet	Key Note Segment		5 ft	102			
132108	56.1 to 57.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
132112	56.8 to 71.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,580**
132109	71.0 to 72.0 feet	**Vertical Change**	.39"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **431 FIG AVE** **$11,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101512	FIG AVE	441 FIG AVE	431 FIG AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132098	0.0 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
132099	6.6 to 10.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
132100	10.8 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
132101	17.3 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
132096	17.9 to 18.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
132097	21.6 to 22.6 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
132106	22.1 to 42.9 feet	Key Note Segment		5 ft	104			
132102	43.8 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
132103	47.2 to 51.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
132104	51.8 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
132105	67.1 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **441 FIG AVE** **$16,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101521	FIG AVE	AVILA WAY	413 FIG AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132164	0.2 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
132165	5.5 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
132161	24.5 to 25.5 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
132166	26.2 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
132167	40.4 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
132168	46.5 to 59.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
132169	61.9 to 70.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
132170	70.6 to 73.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
132171	73.9 to 78.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,940**
132172	79.0 to 106.8 feet	Key Note Segment		5 ft	139			
132162	82.4 to 83.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
132163	106.4 to 107.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **AVILA WAY** **$34,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101523	FIG AVE	AVILA WAY	CLINTON ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132181	0.6 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
132182	7.4 to 11.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
132173	7.8 to 8.8 feet	**Vertical Change**	1.44"	5 ft	5	REF		
132183	11.6 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
132189	22.9 to 42.4 feet	Key Note Segment		5 ft	98			
132174	24.9 to 25.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
132175	32.6 to 33.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
132176	40.5 to 41.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
132190	49.1 to 69.1 feet	Key Note Segment		5 ft	100			
132184	71.7 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,520**
132177	80.7 to 81.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
132178	99.5 to 100.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
132191	120.3 to 139.8 feet	Key Note Segment		5 ft	98			
132185	143.0 to 145.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
132192	146.3 to 166.4 feet	Key Note Segment		5 ft	100			
132186	168.4 to 173.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
132179	169.9 to 170.9 feet	**Vertical Change**	2.71"	5 ft	5	REF		
132180	175.1 to 176.1 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
132187	176.8 to 179.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
132188	179.0 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: NE *side of* **FIG AVE** *Starting at:* **AVILA WAY** **$47,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101454	FIG AVE	CLINTON ST	406 FIG AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132068	8.3 to 9.3 feet	Continuous Width	24"	4 ft	4	SF	$120	**$480**
132056	9.3 to 10.3 feet	Vertical Change	-.78"	4 ft	4	SF	$75	**$300**
132061	10.5 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
132057	25.9 to 26.9 feet	Vertical Change	-.36"	4 ft	4	LF	$75	**$300**
132062	31.1 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
132066	40.0 to 53.8 feet	Key Note Segment		4 ft	55			
132058	40.3 to 41.3 feet	Vertical Change	.51"	4 ft	4	REF		
132063	56.5 to 70.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	57	SF	$120	**$6,864**
132059	67.7 to 68.7 feet	Vertical Change	.26"	4 ft	4	REF		
132064	71.4 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,288**
132060	84.2 to 85.2 feet	Vertical Change	-.46"	4 ft	4	REF		
132067	84.9 to 103.3 feet	Key Note Segment		4 ft	74			
132065	103.3 to 104.6 feet	Cross Slope (Driveway)	8.0-9.0%	4 ft	5	SF	$40	**$208**

TOTAL COST FOR: SW *side of* **FIG AVE** *Starting at:* **CLINTON ST** **$18,088.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281204	FILBERT ST	1336 FILBERT ST	1386 FILBERT ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112593	4.2 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112601	5.3 to 23.6 feet	Key Note Segment		5 ft	92			
112594	24.3 to 26.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	13	SF	$40	**$500**
112590	24.5 to 25.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
112595	27.1 to 28.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
112596	28.3 to 29.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
112602	31.3 to 50.7 feet	Key Note Segment		5 ft	97			
112591	50.8 to 51.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112597	52.3 to 65.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
112598	65.2 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
112599	79.2 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
112600	103.4 to 108.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
112603	108.4 to 128.3 feet	Key Note Segment		5 ft	100			
112592	132.1 to 133.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **FILBERT ST** *Starting at:* **1336 FILBERT ST** **$31,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281206	FILBERT ST	1402 FILBERT ST	CHESTNUT AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112606	0.2 to 2.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
112607	4.2 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
112604	6.9 to 7.9 feet	**Vertical Change**	-.5"	5 ft	5	REF		
112608	7.5 to 13.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
112609	13.9 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
112605	18.6 to 19.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
112611	22.0 to 41.4 feet	Key Note Segment		5 ft	97			
112610	47.0 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: W *side of* **FILBERT ST** *Starting at:* **1402 FILBERT ST** **$10,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121311	FILLMORE AVE	IMPERIAL DR	IMPERIAL DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95501	8.6 to 9.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
95517	13.1 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
95502	19.1 to 20.1 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
95543	19.3 to 39.0 feet	Key Note Segment		5 ft	99			
95503	29.3 to 30.3 feet	Vertical Change	.28"	5 ft	5	REF		
95518	39.8 to 44.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580
95519	48.5 to 51.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
95544	51.1 to 70.6 feet	Key Note Segment		5 ft	97			
95504	61.4 to 62.4 feet	Vertical Change	.48"	5 ft	5	REF		
95505	70.8 to 71.8 feet	Vertical Change	.31"	5 ft	5	REF		
95520	71.2 to 72.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
95521	72.2 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
95522	77.6 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,720
95545	103.2 to 122.2 feet	Key Note Segment		5 ft	95			
95506	121.9 to 122.9 feet	Vertical Change	2.09"	5 ft	5	REF		
95523	123.8 to 126.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
95524	126.8 to 130.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$1,980
95525	133.3 to 140.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,500
95526	141.6 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
95527	161.5 to 173.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,440
95546	174.1 to 195.3 feet	Key Note Segment		5 ft	106			
95547	197.2 to 226.5 feet	Key Note Segment		5 ft	147			
95507	217.2 to 218.2 feet	Vertical Change	.31"	5 ft	5	REF		
95508	226.7 to 227.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
95528	237.5 to 253.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	$9,480
95509	252.2 to 253.2 feet	Vertical Change	.34"	5 ft	5	REF		
95548	257.3 to 277.9 feet	Key Note Segment		5 ft	103			
95549	284.4 to 305.3 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121311	FILLMORE AVE	IMPERIAL DR	IMPERIAL DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95510	284.5 to 285.5 feet	Vertical Change	.26"	5 ft	5	REF		
95511	295.8 to 296.8 feet	Vertical Change	.29"	5 ft	5	REF		
95529	305.8 to 308.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
95530	310.0 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
95512	320.1 to 321.1 feet	Vertical Change	.26"	5 ft	5	REF		
95531	323.4 to 341.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
95513	331.6 to 332.6 feet	Vertical Change	-.3"	5 ft	5	REF		
95532	343.7 to 345.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
95533	346.8 to 353.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
95534	357.0 to 363.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
95535	363.5 to 367.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95514	365.7 to 366.7 feet	Vertical Change	.39"	5 ft	5	REF		
95536	368.3 to 376.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
95537	379.2 to 381.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
95538	382.8 to 399.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
95515	387.6 to 388.6 feet	Vertical Change	.35"	5 ft	5	REF		
95539	401.8 to 408.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
95550	411.5 to 432.2 feet	Key Note Segment		5 ft	104			
95540	434.3 to 441.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
95516	437.1 to 438.1 feet	Vertical Change	.43"	5 ft	5	REF		
95541	445.1 to 446.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
95542	452.9 to 461.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: S/E/N *side of* **FILLMORE AVE** *Starting at:* **IMPERIAL DR** **$117,305.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141037	FILLMORE AVE	N SCHNOOR AVE	ORCHARD AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100891	0.3 to 1.3 feet	Vertical Change	.69"	5 ft	5	SF	$75	$375
100892	7.9 to 8.9 feet	Vertical Change	-.72"	5 ft	5	SF	$75	$375
100921	11.1 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	$5,520
100893	16.9 to 17.9 feet	Vertical Change	.26"	5 ft	5	REF		
100922	20.7 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
100894	22.3 to 23.3 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
100984	34.3 to 48.3 feet	Key Note Segment		5 ft	70			
100923	48.3 to 53.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	28	SF	$40	$1,100
100924	56.8 to 59.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
100985	59.7 to 74.2 feet	Key Note Segment		5 ft	73			
100925	74.8 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,580
100926	80.0 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
100896	82.8 to 83.8 feet	Vertical Change	.27"	5 ft	5	REF		
100927	86.0 to 91.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,240
100928	96.7 to 100.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
100929	100.6 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
100930	106.6 to 107.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
100931	108.8 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
100986	119.8 to 133.7 feet	Key Note Segment		5 ft	69			
100897	137.6 to 138.6 feet	Vertical Change	.29"	5 ft	5	REF		
100932	138.2 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
100898	142.1 to 143.1 feet	Vertical Change	.59"	5 ft	5	REF		
100899	145.4 to 146.4 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
100900	148.1 to 151.7 feet	Vertical Change	-.38"	5 ft	18	LF	$75	$1,350
100933	155.3 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
100901	159.9 to 160.9 feet	Vertical Change	.34"	5 ft	5	REF		
100934	166.1 to 169.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
100902	178.6 to 179.6 feet	Vertical Change	-.61"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141037	FILLMORE AVE	N SCHNOOR AVE	ORCHARD AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100987	179.4 to 193.3 feet	Key Note Segment		5 ft	70			
100903	187.6 to 188.6 feet	Vertical Change	.28"	5 ft	5	REF		
100935	195.0 to 199.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
100904	198.4 to 199.4 feet	Vertical Change	.3"	5 ft	5	REF		
100936	204.4 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
100937	210.9 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
100905	218.3 to 219.3 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
100938	219.5 to 234.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
100906	225.0 to 226.0 feet	Vertical Change	.51"	5 ft	5	REF		
100939	236.3 to 238.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
100940	242.7 to 247.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
100941	250.4 to 253.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
100942	255.2 to 256.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
100943	258.5 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
100944	262.1 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
100907	265.1 to 266.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
100988	265.2 to 278.7 feet	Key Note Segment		5 ft	68			
100908	272.9 to 273.9 feet	Vertical Change	.31"	5 ft	5	REF		
100909	280.1 to 281.1 feet	Vertical Change	.33"	5 ft	5	REF		
100945	280.2 to 282.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
100946	284.8 to 286.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100947	288.3 to 291.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
100948	297.5 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
100910	314.3 to 315.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
100949	322.3 to 323.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
100989	326.0 to 346.4 feet	Key Note Segment		5 ft	102			
100911	327.2 to 328.2 feet	Vertical Change	.3"	5 ft	5	REF		
100912	333.9 to 334.9 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141037	FILLMORE AVE	N SCHNOOR AVE	ORCHARD AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100950	346.8 to 348.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
100951	360.0 to 363.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
100913	369.4 to 370.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
100952	378.8 to 384.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
100990	384.3 to 397.8 feet	Key Note Segment		5 ft	68			
100953	397.8 to 399.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
100954	404.2 to 408.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
100955	409.2 to 417.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
100956	420.8 to 424.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
100957	425.2 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
100958	431.2 to 432.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100959	437.6 to 440.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
100991	441.6 to 464.7 feet	Key Note Segment		5 ft	116			
100960	464.7 to 465.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
100961	468.2 to 474.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
100962	474.5 to 481.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
100992	481.4 to 495.6 feet	Key Note Segment		5 ft	71			
100963	495.6 to 497.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
100964	497.2 to 498.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
100965	501.7 to 505.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
100966	506.7 to 510.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
100967	514.3 to 517.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
100968	519.1 to 524.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
100969	526.8 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
100970	530.1 to 533.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
100971	533.8 to 536.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
100972	539.8 to 544.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
100973	547.2 to 548.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141037	FILLMORE AVE	N SCHNOOR AVE	ORCHARD AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100974	552.7 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
100914	564.7 to 565.7 feet	**Vertical Change**	-.59"	5 ft	5	SF	$75	**$375**
100993	565.1 to 578.8 feet	Key Note Segment		5 ft	68			
100975	579.0 to 580.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
100915	582.1 to 583.1 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
100976	585.7 to 594.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
100994	594.9 to 618.9 feet	Key Note Segment		5 ft	120			
100916	595.3 to 596.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
100977	618.9 to 637.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	95	SF	$40	**$3,800**
100917	620.1 to 621.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
100978	640.3 to 650.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
100918	646.7 to 647.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
100979	652.3 to 656.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
100995	656.3 to 670.7 feet	Key Note Segment		5 ft	72			
100919	657.1 to 658.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
100980	674.3 to 684.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
100981	684.8 to 690.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
100982	693.6 to 694.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100983	696.5 to 697.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100920	701.4 to 702.4 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **FILLMORE AVE** *Starting at:* **N SCHNOOR AVE** **$162,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141032	FILLMORE AVE	ORCHARD AVE	N SCHNOOR AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100820	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
100821	8.3 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
100822	20.7 to 28.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
100784	27.1 to 28.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
100878	28.9 to 43.8 feet	Key Note Segment		5 ft	75			
100785	44.3 to 45.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
100823	44.8 to 46.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100786	53.3 to 54.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
100824	53.4 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
100787	70.8 to 71.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
100890	70.9 to 72.1 feet		5.0-6.0%	5 ft	6			
100825	73.6 to 77.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
100788	75.3 to 76.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
100826	81.5 to 83.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
100789	82.2 to 83.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
100879	83.6 to 96.8 feet	Key Note Segment		5 ft	66			
100827	97.8 to 100.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
100828	102.5 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
100829	109.7 to 125.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
100830	127.6 to 131.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
100831	133.8 to 139.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
100832	140.0 to 141.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
100833	141.3 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
100880	144.6 to 158.8 feet	Key Note Segment		5 ft	71			
100834	158.8 to 160.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
100790	161.8 to 162.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
100835	165.8 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
100836	175.4 to 180.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141032	FILLMORE AVE	ORCHARD AVE	N SCHNOOR AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100837	181.4 to 185.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
100838	189.5 to 191.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
100839	193.6 to 206.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
100881	206.7 to 221.5 feet	Key Note Segment		5 ft	74			
100791	222.8 to 223.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
100840	227.0 to 228.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
100841	231.0 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100842	240.3 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
100792	253.0 to 254.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
100793	257.5 to 258.5 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
100794	259.9 to 260.9 feet	**Vertical Change**	-1.99"	5 ft	5	SF	$75	**$375**
100882	262.3 to 275.3 feet	Key Note Segment		5 ft	65			
100795	269.8 to 270.8 feet	**Vertical Change**	.61"	5 ft	5	REF		
100843	277.2 to 278.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100844	282.6 to 288.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
100845	302.8 to 304.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
100846	306.8 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
100847	314.8 to 325.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
100796	322.7 to 323.7 feet	**Vertical Change**	.45"	5 ft	5	REF		
100883	325.7 to 340.5 feet	Key Note Segment		5 ft	74			
100797	333.9 to 334.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
100848	340.8 to 353.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
100798	340.9 to 341.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
100884	356.9 to 370.6 feet	Key Note Segment		5 ft	69			
100799	357.9 to 358.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
100800	364.7 to 365.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
100849	375.3 to 384.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
100850	389.4 to 393.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141032	FILLMORE AVE	ORCHARD AVE	N SCHNOOR AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100851	395.5 to 396.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
100852	399.4 to 400.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
100853	405.3 to 409.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
100801	408.2 to 409.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
100885	410.0 to 427.4 feet	Key Note Segment		5 ft	87			
100802	416.1 to 417.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
100803	421.9 to 422.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
100854	429.8 to 430.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
100855	433.7 to 448.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
100856	451.5 to 455.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
100857	456.1 to 477.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
100804	469.4 to 470.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
100805	474.8 to 475.8 feet	**Vertical Change**	.71"	5 ft	5	REF		
100858	477.7 to 481.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
100859	486.2 to 490.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
100860	491.8 to 496.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
100886	498.9 to 514.7 feet	Key Note Segment		5 ft	79			
100806	508.9 to 509.9 feet	**Vertical Change**	.98"	5 ft	5	REF		
100861	516.1 to 517.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100862	519.6 to 522.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
100807	529.5 to 530.5 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
100887	529.8 to 544.0 feet	Key Note Segment		5 ft	71			
100808	537.9 to 538.9 feet	**Vertical Change**	.6"	5 ft	5	REF		
100863	544.0 to 559.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	76	SF	$40	**$3,020**
100809	547.1 to 548.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
100864	563.8 to 570.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
100810	568.7 to 569.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
100865	570.5 to 578.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141032	FILLMORE AVE	ORCHARD AVE	N SCHNOOR AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100866	578.9 to 580.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
100867	582.9 to 587.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
100868	587.4 to 590.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
100811	590.7 to 591.7 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
100888	591.0 to 604.8 feet	Key Note Segment		5 ft	69			
100869	605.3 to 616.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	56	SF	$40	**$2,220**
100870	616.4 to 630.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
100871	631.6 to 636.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
100812	634.6 to 635.6 feet	**Vertical Change**	2.2"	5 ft	5	REF		
100872	640.3 to 642.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
100813	640.8 to 641.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
100889	647.1 to 664.0 feet	Key Note Segment		5 ft	85			
100814	648.1 to 649.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
100815	656.1 to 657.1 feet	**Vertical Change**	.5"	5 ft	5	REF		
100873	664.7 to 666.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100816	667.2 to 668.2 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
100874	670.3 to 674.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
100817	682.4 to 683.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
100875	687.2 to 688.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100818	691.3 to 692.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
100876	693.0 to 695.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
100877	697.6 to 699.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
100819	699.8 to 700.8 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **FILLMORE AVE** *Starting at:* **ORCHARD AVE** **$171,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201141108	FISK CT	CENTRAL PL	CENTRAL PL	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101440	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
101441	2.3 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101442	5.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
101443	11.3 to 32.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
101444	35.8 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
101455	39.7 to 54.1 feet	Key Note Segment		5 ft	72			
101429	41.2 to 42.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
101445	59.4 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
101456	62.9 to 81.2 feet	Key Note Segment		5 ft	92			
101446	81.7 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
101430	84.1 to 85.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
101431	106.3 to 109.7 feet	**Vertical Change**	.32"	5 ft	17	LF	$75	**$1,275**
101432	112.3 to 113.3 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
101457	112.8 to 127.4 feet	Key Note Segment		5 ft	73			
101458	136.7 to 150.8 feet	Key Note Segment		5 ft	71			
101447	151.3 to 153.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
101433	152.2 to 153.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		
101448	155.2 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
101434	166.1 to 167.1 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
101435	176.3 to 177.3 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
101459	183.3 to 197.6 feet	Key Note Segment		5 ft	72			
101436	200.2 to 201.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
101449	200.9 to 204.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
101437	207.5 to 208.5 feet	**Vertical Change**	2.25"	5 ft	5	SF	$75	**$375**
101460	207.5 to 221.4 feet	Key Note Segment		5 ft	70			
101450	221.8 to 225.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
101451	229.4 to 233.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
101438	234.7 to 235.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201141108	FISK CT	CENTRAL PL	CENTRAL PL	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101452	236.0 to 237.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	7	SF	$120	**$780**
101453	238.4 to 250.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
101439	248.8 to 249.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
101454	250.6 to 265.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
101461	262.4 to 265.4 feet		6.0-7.0%	5 ft	15			
101462	262.4 to 265.4 feet	Running Slope	6.0-7.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: S/E/N *side of* **FISK CT** *Starting at:* **CENTRAL PL** **$56,885.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100956	FLUME ST	4TH ST	5TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55385	2.3 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
55386	20.0 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
55387	28.1 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
55376	44.3 to 45.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
55377	59.3 to 60.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
55388	73.3 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
55378	93.2 to 94.2 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
55393	157.0 to 178.1 feet	Key Note Segment		5 ft	106			
55379	163.7 to 164.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
55394	213.1 to 230.8 feet	Key Note Segment		5 ft	89			
55380	233.9 to 234.9 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
55389	235.7 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
55390	270.8 to 275.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
55382	277.4 to 278.4 feet	**Vertical Change**	.83"	5 ft	5	SF	$75	**$375**
55391	287.3 to 288.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
55383	287.8 to 288.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
55392	290.7 to 295.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
55395	292.5 to 294.3 feet		8.0-9.0%	5 ft	9			
55384	295.6 to 296.6 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **FLUME ST** *Starting at:* **4TH ST** **$49,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100948	FLUME ST	5TH ST	PARKING LOT ENTRANCE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55348	0.8 to 18.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
55341	6.6 to 7.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
55349	19.7 to 35.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
55342	23.8 to 24.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
55343	36.7 to 37.7 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
55350	42.8 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
55344	43.2 to 44.2 feet	**Vertical Change**	-.57"	5 ft	5	REF		
55351	53.8 to 60.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
55345	64.9 to 65.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
55352	70.0 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
55346	79.8 to 80.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
55347	94.1 to 95.1 feet	**Vertical Change**	1.87"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **FLUME ST** *Starting at:* **5TH ST** **$43,425.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101222	FLUME ST	5TH ST	W YOSEMITE AVE	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56251	17.5 to 18.5 feet	Vertical Change	.78"	5 ft	5	SF	$75	$375
56258	96.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
56252	109.0 to 110.0 feet	Vertical Change	1.26"	5 ft	5	SF	$75	$375
56259	129.4 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
56270	144.5 to 168.8 feet	Key Note Segment		5 ft	122			
56253	145.2 to 146.2 feet	Vertical Change	.29"	5 ft	5	REF		
56260	168.8 to 177.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	46	SF	$40	$1,820
56261	181.1 to 185.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
56262	188.8 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
56263	192.6 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,220
56264	201.3 to 231.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	151	SF	$120	$18,060
56255	211.6 to 212.6 feet	Vertical Change	.31"	5 ft	5	REF		
56265	231.7 to 232.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
56266	233.8 to 238.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
56267	238.9 to 246.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,620
56268	249.4 to 250.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
56271	251.8 to 276.0 feet	Key Note Segment		5 ft	121			
56256	254.6 to 255.6 feet	Vertical Change	-.35"	5 ft	5	REF		
56269	277.0 to 288.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,660
56257	294.0 to 295.0 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375

TOTAL COST FOR: SW *side of* **FLUME ST** *Starting at:* **5TH ST** **$60,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100949	FLUME ST	701 E 5TH ST	4TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55357	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
55358	2.9 to 13.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
55359	16.6 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,380**
55353	22.0 to 23.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
55354	43.6 to 44.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
55355	52.3 to 53.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
55360	61.3 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
55356	73.8 to 74.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
55361	74.5 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
55362	79.4 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,500**

TOTAL COST FOR: NE *side of* **FLUME ST** *Starting at:* **701 E 5TH ST** **$51,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101225	FLUME ST	E YOSEMITE AVE	5TH ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56279	1.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56280	5.0 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
56272	18.6 to 19.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56281	22.6 to 30.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
56282	32.8 to 44.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
56283	44.5 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
56284	51.6 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
56285	63.9 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
56286	71.8 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
56273	74.8 to 75.8 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
56287	78.2 to 80.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
56288	81.8 to 83.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
56289	83.4 to 86.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
56306	86.3 to 87.8 feet		5.0-6.0%	5 ft	8			
56290	90.6 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
56291	101.7 to 120.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
56292	121.0 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
56293	135.4 to 144.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
56294	147.2 to 158.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
56295	158.8 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
56275	164.6 to 165.6 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
56296	167.3 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
56276	172.4 to 173.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
56297	176.2 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
56298	198.1 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
56277	198.2 to 199.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
56299	205.5 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
56300	219.0 to 221.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101225	FLUME ST	E YOSEMITE AVE	5TH ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56301	222.2 to 232.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
56278	224.0 to 225.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
56302	234.5 to 239.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
56303	240.5 to 246.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
56304	249.9 to 251.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56305	258.8 to 289.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,660**
56307	289.0 to 290.1 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: NE *side of* **FLUME ST** *Starting at:* **E YOSEMITE AVE** **$125,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100952	FLUME ST	STREET END	4TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55369	0.5 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
55370	15.8 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
55371	20.5 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
55363	34.2 to 35.2 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
55364	44.3 to 45.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
55372	51.7 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
55365	52.9 to 53.9 feet	**Vertical Change**	.64"	5 ft	5	REF		
55375	53.8 to 67.0 feet	Key Note Segment		5 ft	66			
55373	67.0 to 68.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
55374	70.0 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	**$27,900**
55366	74.2 to 75.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
55367	82.8 to 83.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
55368	95.9 to 96.9 feet	**Vertical Change**	.47"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **FLUME ST** *Starting at:* **STREET END** **$47,330.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112161419	FOREST CT	WOODLANDS DR	WOODLANDS DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87032	0.0 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
87056	16.8 to 50.2 feet	Key Note Segment		5 ft	167			
87015	36.9 to 37.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
87016	50.1 to 51.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87033	53.2 to 63.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
87017	60.7 to 61.7 feet	**Vertical Change**	-.53"	5 ft	5	REF		
87034	65.1 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
87018	67.7 to 68.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
87035	79.6 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
87036	90.4 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
87057	101.3 to 125.7 feet	Key Note Segment		5 ft	122			
87019	125.5 to 126.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87037	128.6 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87058	135.5 to 166.3 feet	Key Note Segment		5 ft	154			
87038	167.8 to 169.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87039	169.3 to 188.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
87020	187.1 to 188.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87040	204.2 to 209.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
87059	209.0 to 226.8 feet	Key Note Segment		5 ft	89			
87060	228.1 to 247.8 feet	Key Note Segment		5 ft	99			
87041	248.3 to 252.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
87042	253.1 to 260.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
87021	256.7 to 257.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
87043	260.8 to 262.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
87044	265.9 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
87022	273.0 to 274.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
87061	277.0 to 300.5 feet	Key Note Segment		5 ft	118			
87023	301.3 to 302.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112161419	FOREST CT	WOODLANDS DR	WOODLANDS DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87045	301.7 to 311.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
87046	311.6 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
87024	326.6 to 327.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
87062	329.6 to 355.3 feet	Key Note Segment		5 ft	129			
87025	342.1 to 343.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
87047	357.6 to 359.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87048	362.1 to 365.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
87063	365.4 to 385.3 feet	Key Note Segment		5 ft	100			
87026	368.4 to 369.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
87027	375.5 to 376.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
87049	387.8 to 388.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87050	389.6 to 394.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
87051	397.8 to 399.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
87028	398.5 to 399.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
87052	399.3 to 407.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
87064	409.6 to 429.8 feet	Key Note Segment		5 ft	101			
87029	410.7 to 411.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
87053	431.0 to 439.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
87054	445.7 to 452.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
87030	449.8 to 450.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
87065	454.2 to 485.3 feet	Key Note Segment		5 ft	156			
87031	474.3 to 475.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
87055	487.0 to 490.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: N/W/S *side of* **FOREST CT** *Starting at:* **WOODLANDS DR** **$102,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161439	FOREST LN	CEDAR CREEK LN	WOODLANDS DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87249	0.4 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
87271	7.5 to 34.6 feet	Key Note Segment		5 ft	136			
87233	8.0 to 9.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
87234	31.9 to 32.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
87250	35.5 to 54.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
87235	52.2 to 55.4 feet	**Vertical Change**	.35"	5 ft	16	REF		
87251	54.4 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
87252	65.3 to 76.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
87253	78.2 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
87272	79.8 to 111.2 feet	Key Note Segment		5 ft	157			
87236	91.7 to 92.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
87237	100.5 to 101.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
87254	111.8 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
87255	118.0 to 135.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,500**
87256	137.8 to 144.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
87238	139.5 to 140.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87239	143.7 to 144.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
87273	144.3 to 177.8 feet	Key Note Segment		5 ft	167			
87240	145.6 to 146.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
87241	158.3 to 159.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
87242	178.0 to 179.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
87257	178.6 to 180.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
87258	180.6 to 186.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
87243	184.1 to 185.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
87259	187.1 to 191.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
87260	191.2 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
87261	198.7 to 208.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
87262	208.7 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161439	FOREST LN	CEDAR CREEK LN	WOODLANDS DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87263	213.4 to 215.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
87264	217.4 to 224.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
87265	224.4 to 232.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
87266	234.8 to 236.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
87244	235.3 to 236.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
87267	239.8 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
87274	243.8 to 276.2 feet	Key Note Segment		5 ft	162			
87245	245.1 to 246.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
87246	259.7 to 263.3 feet	**Vertical Change**	.29"	5 ft	18	REF		
87268	279.0 to 280.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
87247	280.0 to 281.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87269	280.9 to 294.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
87275	294.4 to 326.4 feet	Key Note Segment		5 ft	160			
87248	305.3 to 306.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
87270	327.9 to 338.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**

TOTAL COST FOR: N *side of* **FOREST LN** *Starting at:* **CEDAR CREEK LN** **$92,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161434	FOREST LN	WOODLANDS DR	3014 FOREST LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87207	0.0 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
87208	4.5 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
87209	18.8 to 50.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	159	SF	$120	**$19,020**
87200	29.8 to 30.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
87201	42.3 to 43.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
87222	54.3 to 70.9 feet	Key Note Segment		5 ft	83			
87202	55.2 to 56.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
87210	73.1 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
87223	74.6 to 95.9 feet	Key Note Segment		5 ft	107			
87211	96.1 to 97.9 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	9	SF	$40	**$360**
87212	99.8 to 120.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,360**
87213	123.7 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
87224	126.8 to 147.5 feet	Key Note Segment		5 ft	104			
87214	148.7 to 163.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
87225	163.6 to 193.5 feet	Key Note Segment		5 ft	150			
87203	179.3 to 180.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87204	182.2 to 183.2 feet	**Vertical Change**	2.74"	5 ft	5	REF		
87215	196.5 to 204.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
87216	208.4 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87217	212.1 to 243.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,900**
87205	223.8 to 224.8 feet	**Vertical Change**	3.43"	5 ft	5	REF		
87206	227.8 to 228.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		
87218	245.9 to 249.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
87219	252.3 to 276.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,580**
87220	277.0 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
87221	282.3 to 295.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**

TOTAL COST FOR: S *side of* **FOREST LN** *Starting at:* **WOODLANDS DR** **$105,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261217	FORUM WAY	3320 FORUM WAY	N WESTBERRY BLV	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108980	0.5 to 28.2 feet	Key Note Segment		5 ft	139			
108973	10.1 to 11.1 feet	Vertical Change	.29"	5 ft	5	REF		
108974	28.5 to 29.5 feet	Vertical Change	.28"	5 ft	5	REF		
108976	30.3 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
108977	40.3 to 44.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
108978	44.6 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
108975	50.2 to 51.2 feet	Vertical Change	.54"	5 ft	5	REF		
108979	54.7 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**

TOTAL COST FOR: S *side of* **FORUM WAY** *Starting at:* **3320 FORUM WAY** **$19,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271041	FORUM WAY	GLENVILLE AVE	N WESTBERRY BLV	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110397	0.0 to 11.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
110398	14.0 to 20.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
110387	20.1 to 23.2 feet	**Vertical Change**	-.32"	5 ft	15	REF		
110399	20.6 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
110407	22.2 to 50.3 feet	Key Note Segment		5 ft	141			
110388	48.9 to 49.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
110389	51.5 to 52.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
110400	52.8 to 85.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**
110390	62.2 to 63.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
110401	85.3 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
110402	106.3 to 107.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
110408	107.8 to 137.5 feet	Key Note Segment		5 ft	149			
110391	108.0 to 109.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
110392	136.5 to 137.5 feet	**Vertical Change**	2.2"	5 ft	5	REF		
110403	139.3 to 140.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
110404	140.7 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
110405	147.0 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
110409	149.8 to 186.6 feet	Key Note Segment		5 ft	184			
110393	150.8 to 151.8 feet	**Vertical Change**	.8"	5 ft	5	REF		
110394	178.6 to 179.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
110395	187.9 to 188.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
110406	188.4 to 219.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	**$18,360**
110396	202.2 to 203.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **FORUM WAY** *Starting at:* **GLENVILLE AVE** **$65,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271044	FORUM WAY	N WESTBERRY BLV	GLENVILLE AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110420	1.3 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
110421	24.1 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
110429	29.3 to 58.1 feet	Key Note Segment		5 ft	144			
110410	56.3 to 57.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
110422	58.4 to 59.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$220**
110423	60.0 to 68.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
110424	68.9 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
110430	85.8 to 115.2 feet	Key Note Segment		5 ft	147			
110411	85.9 to 86.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
110412	105.4 to 106.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
110413	113.5 to 114.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
110425	117.0 to 136.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
110414	131.5 to 132.5 feet	**Vertical Change**	-.38"	5 ft	5	REF		
110426	138.6 to 156.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
110415	144.7 to 145.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
110416	150.2 to 151.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110417	157.3 to 158.3 feet	**Vertical Change**	1.79"	5 ft	5	SF	$75	**$375**
110427	164.0 to 167.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
110431	167.6 to 198.3 feet	Key Note Segment		5 ft	154			
110419	196.6 to 197.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
110428	199.3 to 222.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**

TOTAL COST FOR: S *side of* **FORUM WAY** *Starting at:* **N WESTBERRY BLV** **$59,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261215	FORUM WAY	WESTBERRY BVD	3325 FORUM WAY	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108968	0.3 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
108969	6.3 to 14.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
108970	16.3 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
108972	41.3 to 69.2 feet	Key Note Segment		5 ft	140			
108966	41.6 to 42.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
108967	67.7 to 70.3 feet	**Vertical Change**	.37"	5 ft	13	REF		
108971	70.4 to 71.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**

TOTAL COST FOR: N *side of* **FORUM WAY** *Starting at:* **WESTBERRY BVD** **$22,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081538	FOUNTAIN WAY	E SHERWOOD WAY	WESSMITH WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127588	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
127581	3.7 to 4.7 feet	**Vertical Change**	-.39"	4 ft	4	LF	$75	**$300**
127602	3.8 to 22.4 feet	Key Note Segment		4 ft	74			
127582	24.0 to 25.0 feet	**Vertical Change**	.26"	4 ft	4	REF		
127589	24.3 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
127590	26.8 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
127603	31.4 to 50.3 feet	Key Note Segment		4 ft	76			
127591	50.8 to 56.0 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	21	SF	$120	**$2,496**
127604	56.8 to 74.1 feet	Key Note Segment		4 ft	69			
127592	75.9 to 85.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	39	SF	$120	**$4,656**
127593	88.3 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	72	SF	$120	**$8,640**
127594	107.9 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,896**
127595	120.6 to 122.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
127596	122.5 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
127597	126.8 to 143.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	66	SF	$120	**$7,872**
127605	143.2 to 157.0 feet	Key Note Segment		4 ft	55			
127598	157.1 to 181.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	96	SF	$40	**$3,840**
127608	163.5 to 164.5 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
127583	164.3 to 165.3 feet	**Vertical Change**	.4"	4 ft	4	REF		
127584	171.2 to 172.2 feet	**Vertical Change**	-.34"	4 ft	4	REF		
127599	185.2 to 201.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	63	SF	$120	**$7,584**
127606	201.0 to 214.5 feet	Key Note Segment		4 ft	54			
127600	215.7 to 227.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	48	SF	$120	**$5,712**
127607	227.6 to 241.7 feet	Key Note Segment		4 ft	56			
127601	241.7 to 277.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	144	SF	$40	**$5,776**
127585	242.5 to 243.5 feet	**Vertical Change**	.32"	4 ft	4	REF		
127586	246.7 to 247.7 feet	**Vertical Change**	.28"	4 ft	4	REF		
127587	277.7 to 278.7 feet	**Vertical Change**	.28"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081538	FOUNTAIN WAY	E SHERWOOD WAY	WESSMITH WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**E**	*side of* **FOUNTAIN WAY**	*Starting at:* **E SHERWOOD WAY**					**$58,591.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081546	FOUNTAIN WAY	ROBINWOOD WAY	WRENWOOD WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127680	4.7 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
127673	7.1 to 10.2 feet	**Vertical Change**	.66"	4 ft	12	REF		
127674	16.0 to 17.0 feet	**Vertical Change**	.34"	4 ft	4	LF	$75	**$300**
127681	17.9 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,944**
127675	27.6 to 28.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
127687	47.1 to 48.1 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
127682	57.3 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
127683	71.3 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,272**
127676	82.1 to 83.1 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
127677	100.0 to 101.0 feet	**Vertical Change**	2.87"	4 ft	4	SF	$75	**$300**
127678	101.7 to 102.7 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
127684	105.0 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
127688	117.7 to 118.7 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
127685	120.3 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
127679	122.1 to 123.1 feet	**Vertical Change**	2.97"	4 ft	4	REF		
127686	133.8 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$8,976**

TOTAL COST FOR: W *side of* **FOUNTAIN WAY** *Starting at:* **ROBINWOOD WAY** **$24,534.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081542	FOUNTAIN WAY	WESSMITH WAY	ROBINWOOD WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127625	0.1 to 3.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	12	SF	$120	**$1,440**
127626	3.1 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,920**
127609	3.7 to 4.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
127627	9.8 to 29.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	80	SF	$120	**$9,552**
127610	16.7 to 17.7 feet	**Vertical Change**	1.05"	4 ft	4	REF		
127628	30.8 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
127657	34.7 to 47.9 feet	Key Note Segment		4 ft	53			
127629	47.9 to 52.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	20	SF	$40	**$784**
127611	48.7 to 49.7 feet	**Vertical Change**	.29"	4 ft	4	REF		
127630	53.3 to 59.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,880**
127658	59.3 to 74.3 feet	Key Note Segment		4 ft	60			
127631	75.1 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
127632	76.3 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
127612	80.6 to 81.6 feet	**Vertical Change**	3.51"	4 ft	4	REF		
127613	84.4 to 85.4 feet	**Vertical Change**	.44"	4 ft	4	LF	$75	**$300**
127614	95.1 to 96.1 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
127633	104.0 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
127634	113.4 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
127659	120.4 to 134.8 feet	Key Note Segment		4 ft	58			
127615	135.9 to 136.9 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
127616	142.1 to 143.1 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
127617	154.8 to 155.8 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
127618	158.7 to 159.7 feet	**Vertical Change**	3.26"	4 ft	4	SF	$75	**$300**
127619	161.5 to 162.5 feet	**Vertical Change**	-.53"	4 ft	4	SF	$75	**$300**
127664	165.5 to 166.7 feet		5.0-6.0%	4 ft	5			
127620	169.1 to 170.1 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
127635	172.3 to 174.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
127636	178.3 to 180.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081542	FOUNTAIN WAY	WESSMITH WAY	ROBINWOOD WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127637	186.8 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
127638	193.1 to 202.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	$4,560
127639	207.0 to 210.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	$1,680
127621	208.3 to 209.3 feet	Vertical Change	-.36"	4 ft	4	REF		
127660	211.2 to 225.6 feet	Key Note Segment		4 ft	58			
127640	225.6 to 228.7 feet	Cross Slope (Driveway)	5.0-6.0%	4 ft	12	SF	$40	$496
127641	229.9 to 237.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	$3,648
127661	239.0 to 253.2 feet	Key Note Segment		4 ft	57			
127642	254.3 to 261.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	$3,312
127643	261.5 to 269.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	32	SF	$120	$3,840
127644	271.2 to 290.4 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	77	SF	$120	$9,216
127622	291.2 to 292.2 feet	Vertical Change	-.29"	4 ft	4	REF		
127645	291.5 to 294.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	11	SF	$120	$1,344
127646	294.6 to 297.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	11	SF	$120	$1,344
127647	298.3 to 301.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	14	SF	$120	$1,632
127648	302.8 to 304.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	7	SF	$120	$864
127649	305.2 to 327.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	90	SF	$120	$10,800
127623	326.9 to 327.9 feet	Vertical Change	.41"	4 ft	4	REF		
127650	327.7 to 328.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
127662	330.1 to 343.9 feet	Key Note Segment		4 ft	55			
127651	343.9 to 355.5 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	46	SF	$40	$1,856
127663	357.2 to 371.6 feet	Key Note Segment		4 ft	58			
127652	372.3 to 386.6 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	57	SF	$40	$2,288
127624	372.4 to 373.4 feet	Vertical Change	.39"	4 ft	4	REF		
127653	386.9 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	$1,776
127654	390.6 to 397.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	$3,504
127655	398.1 to 404.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	$3,168
127656	407.3 to 411.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	$1,776

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081542	FOUNTAIN WAY	WESSMITH WAY	ROBINWOOD WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E		*side of* **FOUNTAIN WAY**	*Starting at:* **WESSMITH WAY**					**$89,664.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081550	FOUNTAIN WAY	WESSMITH WAY	E SHERWOOD WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127710	0.0 to 12.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	51	SF	$120	**$6,144**
127706	10.2 to 11.2 feet	**Vertical Change**	.27"	4 ft	4	REF		
127711	13.7 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	256	SF	$120	**$30,720**
127712	79.8 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,560**
127707	83.5 to 84.5 feet	**Vertical Change**	.71"	4 ft	4	SF	$75	**$300**
127713	104.7 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	276	SF	$120	**$33,120**
127708	111.6 to 112.6 feet	**Vertical Change**	2.71"	4 ft	4	REF		
127714	176.3 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
127709	180.1 to 181.1 feet	**Vertical Change**	.33"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: W *side of* **FOUNTAIN WAY** *Starting at:* **WESSMITH WAY** **$82,872.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081548	FOUNTAIN WAY	WRENWOOD WAY	WESSMITH WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127696	3.1 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
127689	8.2 to 9.2 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
127697	11.4 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
127698	18.5 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
127690	27.6 to 28.6 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
127699	32.2 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
127700	39.7 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,512**
127691	66.8 to 67.8 feet	**Vertical Change**	.33"	4 ft	4	REF		
127701	67.1 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
127702	71.6 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,296**
127703	76.6 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,832**
127692	77.3 to 78.3 feet	**Vertical Change**	.57"	4 ft	4	REF		
127704	84.5 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	177	SF	$120	**$21,264**
127693	101.6 to 102.6 feet	**Vertical Change**	.66"	4 ft	4	REF		
127694	111.3 to 112.3 feet	**Vertical Change**	.48"	4 ft	4	REF		
127695	119.8 to 120.8 feet	**Vertical Change**	3.2"	4 ft	4	SF	$75	**$300**
127705	138.5 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**

TOTAL COST FOR: W *side of* **FOUNTAIN WAY** *Starting at:* **WRENWOOD WAY** **$51,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241153	FOURTH ST	1417 FOURTH ST	ROTAN AVE	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107097	9.8 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
107091	15.6 to 16.6 feet	**Vertical Change**	.33"	4 ft	4	LF	$75	**$300**
107098	17.1 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
107092	18.1 to 19.1 feet	**Vertical Change**	1.17"	4 ft	4	REF		
107093	22.7 to 23.7 feet	**Vertical Change**	1.21"	4 ft	4	REF		
107099	26.0 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,416**
107094	26.5 to 27.5 feet	**Vertical Change**	.92"	4 ft	4	REF		
107095	29.8 to 30.8 feet	**Vertical Change**	.41"	4 ft	4	REF		
107104	29.8 to 30.8 feet	**Protruding Object**	36"	4 ft	4	JOB	$99	**$99**
107096	36.0 to 37.0 feet	**Vertical Change**	.44"	4 ft	4	LF	$75	**$300**
107100	40.8 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,376**
107101	54.1 to 58.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**
107102	58.8 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
107103	68.4 to 70.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**

TOTAL COST FOR: N *side of* **FOURTH ST** *Starting at:* **1417 FOURTH ST** **$20,091.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241140	FOURTH ST	1612 FOURTH ST	FAIRVIEW AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107048	4.7 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
107040	16.8 to 17.8 feet	**Vertical Change**	.41"	4 ft	4	LF	$75	**$300**
107053	30.8 to 37.5 feet	Key Note Segment		4 ft	27			
107042	46.8 to 47.8 feet	**Vertical Change**	-.48"	4 ft	4	LF	$75	**$300**
107043	69.4 to 70.4 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
107054	74.0 to 81.4 feet	Key Note Segment		4 ft	30			
107049	101.1 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
107044	103.5 to 104.5 feet	**Vertical Change**	.29"	4 ft	4	REF		
107050	115.3 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
107055	118.6 to 126.1 feet	Key Note Segment		4 ft	30			
107045	151.1 to 152.1 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
107051	157.3 to 173.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,584**
107046	163.6 to 164.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
107047	171.2 to 172.2 feet	**Vertical Change**	.4"	4 ft	4	REF		
107052	176.7 to 179.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**

TOTAL COST FOR: S *side of* **FOURTH ST** *Starting at:* **1612 FOURTH ST** **$16,416.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241143	FOURTH ST	FAIRVIEW AVE	ROTAN AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107061	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
107062	9.9 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
107072	48.3 to 57.8 feet	Key Note Segment		4 ft	38			
107063	57.9 to 70.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	49	SF	$40	**$1,952**
107056	69.7 to 70.7 feet	**Vertical Change**	1.06"	4 ft	4	REF		
107074	71.3 to 72.3 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
107064	87.7 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
107073	103.7 to 121.7 feet	Key Note Segment		4 ft	72			
107065	121.8 to 124.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	11	SF	$40	**$448**
107066	124.6 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
107067	149.5 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
107057	166.4 to 167.4 feet	**Vertical Change**	-.45"	4 ft	4	LF	$75	**$300**
107068	169.9 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	200	SF	$120	**$24,000**
107058	199.6 to 200.6 feet	**Vertical Change**	.5"	4 ft	4	REF		
107059	208.6 to 209.6 feet	**Vertical Change**	3.01"	4 ft	4	REF		
107069	223.2 to 227.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,968**
107070	227.8 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
107060	228.4 to 229.4 feet	**Vertical Change**	-.27"	4 ft	4	REF		
107071	244.4 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**

TOTAL COST FOR: S *side of* **FOURTH ST** *Starting at:* **FAIRVIEW AVE** **$48,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191055	FOURTH ST	N I ST	SUNSET AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38838	1.5 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
38839	33.3 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38840	38.5 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
38841	52.8 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38842	67.7 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38859	72.2 to 104.0 feet	Key Note Segment		5 ft	159			
38843	127.8 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
38833	131.7 to 132.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
38844	147.0 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
38834	158.7 to 159.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
38845	159.6 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
38835	173.1 to 174.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38836	190.5 to 191.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
38846	202.6 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38847	264.8 to 269.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
38848	302.5 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38837	308.4 to 309.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
38849	322.6 to 329.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
38850	335.3 to 336.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38851	349.3 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38852	355.6 to 361.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
38853	383.3 to 384.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38854	389.0 to 403.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
38855	407.9 to 412.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
38856	425.9 to 428.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
38857	431.5 to 433.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38858	437.6 to 441.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: NW *side of* **FOURTH ST** *Starting at:* **N I ST** **$72,945.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191042	FOURTH ST	N J ST	N I ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38815	21.6 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38816	25.3 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
38817	29.7 to 31.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
38818	31.6 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
38819	51.6 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
38820	66.6 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
38814	72.9 to 73.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
38821	88.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38822	106.3 to 112.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
38823	148.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38832	157.0 to 183.6 feet	Key Note Segment		5 ft	133			
38824	184.3 to 185.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
38825	195.8 to 199.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38826	204.6 to 206.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38827	215.4 to 281.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	332	SF	$120	**$39,900**
38828	286.8 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38829	294.0 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
38830	313.2 to 317.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
38831	317.0 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N J ST** **$81,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191034	FOURTH ST	N K ST	N J ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38769	8.3 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
38765	18.9 to 19.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
38770	19.3 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38771	25.7 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
38772	41.1 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38773	50.8 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
38766	51.9 to 52.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
38774	70.0 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
38775	86.4 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
38776	118.0 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38788	120.6 to 143.5 feet	Key Note Segment		5 ft	115			
38767	121.1 to 122.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
38768	142.9 to 143.9 feet	**Vertical Change**	2.18"	5 ft	5	REF		
38777	144.3 to 151.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**
38778	153.5 to 155.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
38779	155.7 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
38780	165.7 to 169.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
38781	172.3 to 175.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
38782	175.6 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
38783	205.0 to 212.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
38784	235.0 to 236.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38785	239.8 to 249.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
38786	252.2 to 254.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38787	262.3 to 266.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: NE *side of* **FOURTH ST** *Starting at:* **N K ST** **$53,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190942	FOURTH ST	N L ST	N M ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38518	0.0 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
38519	21.0 to 35.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
38503	32.1 to 33.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
38527	43.7 to 65.9 feet	Key Note Segment		5 ft	111			
38504	52.8 to 53.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
38505	55.5 to 56.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
38506	66.1 to 67.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
38507	78.6 to 79.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
38520	101.9 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
38521	112.4 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38508	113.1 to 114.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
38509	121.7 to 122.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
38528	125.0 to 139.1 feet	Key Note Segment		5 ft	71			
38522	140.0 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
38510	154.4 to 155.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
38511	165.0 to 166.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38512	171.8 to 172.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
38513	178.0 to 179.0 feet	**Vertical Change**	-1.06"	5 ft	5	SF	$75	**$375**
38514	178.0 to 179.0 feet	**Vertical Change**	-.77"	5 ft	5	SF	$75	**$375**
38515	178.0 to 179.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
38516	190.9 to 191.9 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
38523	196.4 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
38524	209.3 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
38525	221.8 to 223.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
38517	225.2 to 226.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
38526	225.6 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
38529	255.8 to 259.7 feet		5.0-6.0%	5 ft	20			
38530	262.5 to 264.2 feet		5.0-6.0%	5 ft	9			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190942	FOURTH ST	N L ST	N M ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW	*side of* **FOURTH ST**	*Starting at:* **N L ST**						**$59,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191029	FOURTH ST	N L ST	N K ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38755	46.8 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
38756	54.4 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
38763	67.5 to 80.8 feet	Key Note Segment		5 ft	67			
38757	106.9 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38764	125.2 to 141.6 feet	Key Note Segment		5 ft	82			
38758	166.8 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
38759	179.4 to 187.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
38760	194.3 to 202.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
38761	205.8 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38754	218.4 to 219.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
38762	254.1 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N L ST** **$23,835.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190946	FOURTH ST	N M ST	N N ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38537	1.3 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
38531	8.5 to 9.5 feet	**Vertical Change**	2.03"	5 ft	5	SF	$75	**$375**
38538	10.9 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
38532	17.6 to 18.6 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
38539	21.1 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
38540	31.1 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
38541	45.3 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38552	47.3 to 57.3 feet	Key Note Segment		5 ft	50			
38542	63.3 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38543	70.0 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
38533	72.9 to 73.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
38544	88.9 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
38553	124.2 to 137.8 feet	Key Note Segment		5 ft	68			
38534	137.3 to 138.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
38545	138.5 to 140.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
38546	157.3 to 168.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
38535	162.8 to 163.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
38547	170.5 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38554	183.8 to 192.6 feet	Key Note Segment		5 ft	44			
38548	192.8 to 199.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	32	SF	$40	**$1,280**
38536	213.1 to 214.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
38549	215.0 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
38550	222.3 to 227.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
38551	248.8 to 254.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: NW *side of* **FOURTH ST** *Starting at:* **N M ST** **$61,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191026	FOURTH ST	N M ST	N L ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38735	10.2 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
38736	21.4 to 23.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
38737	24.5 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**
38738	64.7 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38751	73.5 to 83.8 feet	Key Note Segment		5 ft	52			
38739	84.6 to 86.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
38740	86.8 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
38741	100.8 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38742	115.3 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
38752	124.4 to 142.7 feet	Key Note Segment		5 ft	91			
38732	142.7 to 143.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
38743	160.0 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38744	168.6 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38753	173.4 to 186.8 feet	Key Note Segment		5 ft	67			
38745	192.4 to 200.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
38746	205.9 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38747	214.3 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
38734	219.6 to 220.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
38748	224.3 to 245.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
38749	248.9 to 252.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
38750	253.1 to 266.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N M ST** **$75,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190950	FOURTH ST	N N ST	N O ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38563	4.3 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38564	10.3 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
38555	13.8 to 14.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
38565	24.4 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38556	36.5 to 37.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
38566	42.8 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
38567	64.2 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38568	71.8 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
38569	81.7 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
38578	87.5 to 98.7 feet	Key Note Segment		5 ft	56			
38557	99.3 to 100.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
38570	100.3 to 101.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
38571	102.5 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
38572	111.7 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38558	115.9 to 116.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38573	130.5 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
38559	141.7 to 142.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
38574	143.3 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38579	144.7 to 152.6 feet	Key Note Segment		5 ft	40			
38560	148.7 to 149.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
38561	185.4 to 186.4 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
38580	187.0 to 200.6 feet	Key Note Segment		5 ft	68			
38575	200.6 to 209.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
38576	219.7 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
38577	221.6 to 258.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	182	SF	$120	**$21,840**
38562	235.6 to 236.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **FOURTH ST** *Starting at:* **N N ST** **$56,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191023	FOURTH ST	N N ST	N M ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38715	29.9 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
38716	48.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
38717	70.2 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
38718	103.5 to 105.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38729	106.9 to 122.7 feet	Key Note Segment		5 ft	79			
38730	124.3 to 136.8 feet	Key Note Segment		5 ft	63			
38719	142.8 to 157.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
38720	164.5 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
38721	179.5 to 181.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
38722	185.6 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
38731	194.8 to 210.2 feet	Key Note Segment		5 ft	77			
38723	210.2 to 219.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
38724	222.7 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
38725	230.9 to 234.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38726	239.3 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
38714	249.2 to 250.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
38727	250.1 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
38728	258.3 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N N ST** **$68,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191018	FOURTH ST	N O ST	N N ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38699	4.8 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
38700	18.2 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
38701	50.8 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
38702	58.8 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
38712	67.9 to 83.9 feet	Key Note Segment		5 ft	80			
38696	83.9 to 84.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
38703	88.4 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38697	90.1 to 91.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
38704	100.1 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38705	115.0 to 116.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38713	124.6 to 143.7 feet	Key Note Segment		5 ft	95			
38706	154.4 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38707	169.2 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
38708	178.6 to 179.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38709	187.2 to 215.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
38710	233.9 to 237.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38698	243.0 to 244.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
38711	263.6 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**

TOTAL COST FOR: NE *side of* **FOURTH ST** *Starting at:* **N O ST** **$57,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190958	FOURTH ST	N O ST	N Q ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38595	0.3 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
38581	15.0 to 16.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
38596	48.9 to 50.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
38597	51.6 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
38623	59.8 to 84.0 feet	Key Note Segment		5 ft	121			
38598	84.0 to 86.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
38599	86.0 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
38624	94.0 to 119.1 feet	Key Note Segment		5 ft	126			
38625	122.4 to 137.3 feet	Key Note Segment		5 ft	75			
38582	125.3 to 126.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
38600	144.2 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
38601	152.3 to 154.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
38602	157.3 to 172.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
38603	174.3 to 180.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
38583	178.6 to 179.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
38604	181.3 to 189.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
38605	209.4 to 213.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
38606	215.2 to 236.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,480**
38607	238.8 to 245.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
38626	245.0 to 273.1 feet	Key Note Segment		5 ft	141			
38584	245.7 to 246.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
38585	260.0 to 261.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
38586	263.6 to 264.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
38587	277.2 to 278.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
38608	277.7 to 318.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,360**
38588	284.6 to 285.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
38609	318.3 to 321.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
38610	321.8 to 325.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190958	FOURTH ST	N O ST	N Q ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38611	325.6 to 329.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
38612	329.8 to 332.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38589	335.3 to 336.3 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
38613	341.5 to 372.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
38614	375.9 to 378.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
38615	380.1 to 399.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
38590	390.5 to 391.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
38616	403.3 to 406.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38617	408.9 to 427.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
38618	429.8 to 433.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
38627	438.9 to 462.6 feet	Key Note Segment		5 ft	119			
38591	439.4 to 440.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
38619	464.9 to 470.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
38620	472.0 to 484.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
38592	485.3 to 486.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
38621	497.9 to 533.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
38622	536.8 to 591.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	273	SF	$120	**$32,700**
38593	575.0 to 576.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
38594	586.9 to 587.9 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **FOURTH ST** *Starting at:* **N O ST** **$222,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191013	FOURTH ST	N P ST	N O ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38675	0.0 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
38676	10.6 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
38669	12.6 to 13.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
38670	30.7 to 31.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38677	33.0 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38671	46.7 to 47.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
38678	47.0 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
38679	60.6 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
38692	79.8 to 89.8 feet	Key Note Segment		5 ft	50			
38680	91.7 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
38681	110.1 to 111.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
38672	111.4 to 112.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
38682	114.0 to 120.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
38683	120.1 to 121.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38693	121.4 to 139.8 feet	Key Note Segment		5 ft	92			
38694	144.3 to 159.3 feet	Key Note Segment		5 ft	75			
38684	160.2 to 196.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,720**
38673	193.7 to 194.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
38685	197.7 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
38686	213.8 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
38687	219.4 to 220.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
38688	222.8 to 226.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
38689	226.8 to 244.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
38674	243.1 to 244.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
38690	247.4 to 252.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
38691	258.8 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N P ST** **$105,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191009	FOURTH ST	N Q ST	N P ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38653	0.1 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
38645	12.4 to 13.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
38654	23.2 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
38655	46.2 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38646	51.0 to 52.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38656	52.4 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38657	57.4 to 59.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
38658	59.0 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38659	77.2 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
38666	85.9 to 98.3 feet	Key Note Segment		5 ft	62			
38647	97.1 to 98.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
38660	105.8 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
38667	120.6 to 133.8 feet	Key Note Segment		5 ft	66			
38648	136.0 to 137.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38661	139.6 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
38668	158.8 to 172.3 feet	Key Note Segment		5 ft	67			
38650	175.1 to 176.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
38662	190.8 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38663	202.1 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
38651	225.3 to 226.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38652	236.2 to 237.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38664	245.0 to 246.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38665	253.1 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: SE *side of* **FOURTH ST** *Starting at:* **N Q ST** **$66,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190938	FOURTH ST	SUNSET AVE	N L ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38471	7.6 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
38472	20.8 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
38473	29.5 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
38474	37.5 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
38475	40.7 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
38496	52.1 to 62.8 feet	Key Note Segment		5 ft	54			
38476	65.1 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
38477	82.9 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
38478	90.4 to 91.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
38479	91.4 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
38497	103.0 to 116.3 feet	Key Note Segment		5 ft	67			
38480	117.8 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
38481	135.3 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
38498	143.9 to 173.9 feet	Key Note Segment		5 ft	150			
38482	174.7 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
38483	183.6 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
38499	197.6 to 220.4 feet	Key Note Segment		5 ft	114			
38484	220.4 to 237.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	83	SF	$40	**$3,320**
38485	237.0 to 238.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
38486	241.0 to 251.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
38468	241.6 to 242.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
38487	253.9 to 261.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
38500	261.8 to 270.0 feet	Key Note Segment		5 ft	41			
38488	270.2 to 273.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$680**
38489	275.9 to 277.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
38501	277.3 to 293.4 feet	Key Note Segment		5 ft	80			
38469	298.5 to 299.5 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
38490	306.8 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105190938	FOURTH ST	SUNSET AVE	N L ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38491	330.0 to 334.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
38492	350.2 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38502	353.6 to 369.0 feet	Key Note Segment		5 ft	77			
38493	369.7 to 373.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
38494	373.6 to 393.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
38495	401.3 to 438.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,560**
38470	421.9 to 422.9 feet	**Vertical Change**	.86"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **FOURTH ST** *Starting at:* **SUNSET AVE** **$119,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041259	FOXGLOVE WAY	2105 N SCHNOOR AVE	2105 N SCHNOOR AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121558	0.0 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
121550	3.4 to 4.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
121559	20.9 to 23.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
121551	22.1 to 23.1 feet	**Vertical Change**	.77"	5 ft	5	REF		
121560	23.0 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
121552	28.5 to 29.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
121561	37.3 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
121553	37.6 to 38.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
121554	42.5 to 43.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
121562	42.7 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
121563	47.6 to 101.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	267	SF	$120	**$32,040**
121555	63.5 to 64.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
121564	105.2 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
121556	107.5 to 108.5 feet	**Vertical Change**	-.44"	5 ft	5	REF		
121557	109.7 to 110.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
121565	110.8 to 112.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: N *side of* **FOXGLOVE WAY** *Starting at:* **2105 N SCHNOOR AVE** **$60,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041401	FOXGLOVE WAY	2105 N SCHNOOR AVE	N SCHNOOR AVE	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121568	0.0 to 24.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,520**
121566	23.6 to 24.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
121569	24.4 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
121570	46.4 to 47.7 feet		6.0-7.0%	5 ft	7			
121567	47.5 to 48.5 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **FOXGLOVE WAY** *Starting at:* **2105 N SCHNOOR AVE** **$28,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141059	FOXGLOVE WAY	ASPEN LN	SUNDANCE LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65367	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
65433	1.8 to 13.5 feet	Key Note Segment		5 ft	59			
65368	14.6 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
65369	20.4 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
65434	23.5 to 41.5 feet	Key Note Segment		5 ft	90			
65340	64.0 to 65.0 feet	**Vertical Change**	3.31"	5 ft	5	SF	$75	**$375**
65370	65.3 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
65371	82.8 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
65435	85.6 to 103.3 feet	Key Note Segment		5 ft	89			
65372	103.3 to 104.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
65373	110.6 to 123.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
65341	127.3 to 128.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
65374	131.3 to 132.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
65342	131.6 to 132.6 feet	**Vertical Change**	1.65"	5 ft	5	REF		
65343	133.4 to 134.4 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
65344	136.8 to 139.5 feet	**Vertical Change**	.32"	5 ft	13	REF		
65375	137.8 to 139.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
65454	138.4 to 149.0 feet		>15.0%	5 ft	53			
65455	138.4 to 149.0 feet	Running Slope	>15.0%	5 ft	53	SF	$120	**$6,360**
65345	140.4 to 141.4 feet	**Vertical Change**	.58"	5 ft	5	REF		
65376	141.2 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
65346	142.4 to 143.4 feet	**Vertical Change**	-.61"	5 ft	5	REF		
65347	144.8 to 145.8 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
65377	147.4 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
65456	150.5 to 151.8 feet		11.0-12.0%	5 ft	7			
65378	156.1 to 158.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
65379	158.8 to 161.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,860**
65380	162.9 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141059	FOXGLOVE WAY	ASPEN LN	SUNDANCE LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65436	178.6 to 202.3 feet	Key Note Segment		5 ft	119			
65381	202.8 to 203.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
65382	207.1 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
65437	215.3 to 238.0 feet	Key Note Segment		5 ft	114			
65348	222.2 to 223.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
65383	238.0 to 240.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	15	SF	$40	**$580**
65384	242.8 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
65385	253.0 to 264.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
65349	263.1 to 264.1 feet	**Vertical Change**	-.51"	5 ft	5	REF		
65386	264.1 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
65387	273.7 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
65388	279.4 to 280.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
65389	282.3 to 295.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
65438	295.5 to 310.2 feet	Key Note Segment		5 ft	74			
65390	311.3 to 312.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
65391	314.7 to 318.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
65392	318.0 to 320.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
65439	321.9 to 336.8 feet	Key Note Segment		5 ft	75			
65393	341.6 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
65394	351.2 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
65350	386.3 to 387.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
65351	393.5 to 394.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
65395	394.4 to 402.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
65440	402.8 to 418.7 feet	Key Note Segment		5 ft	80			
65396	419.4 to 421.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
65397	421.8 to 427.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
65441	429.5 to 444.3 feet	Key Note Segment		5 ft	74			
65398	445.9 to 447.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141059	FOXGLOVE WAY	ASPEN LN	SUNDANCE LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65399	448.9 to 452.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
65400	458.9 to 476.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
65401	479.3 to 490.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
65352	496.0 to 497.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
65442	510.3 to 526.6 feet	Key Note Segment		5 ft	82			
65353	519.5 to 520.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
65402	534.0 to 536.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
65443	536.9 to 553.3 feet	Key Note Segment		5 ft	82			
65403	553.5 to 566.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
65404	566.7 to 569.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
65405	573.5 to 581.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
65406	581.8 to 585.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
65444	585.8 to 610.6 feet	Key Note Segment		5 ft	124			
65354	588.3 to 589.3 feet	**Vertical Change**	.61"	5 ft	5	REF		
65355	590.1 to 594.4 feet	**Vertical Change**	.3"	5 ft	22	REF		
65407	616.4 to 640.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,340**
65356	619.1 to 620.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
65408	640.3 to 644.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
65409	647.3 to 654.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
65445	662.6 to 685.6 feet	Key Note Segment		5 ft	115			
65410	687.0 to 688.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
65411	690.6 to 699.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
65446	700.3 to 718.3 feet	Key Note Segment		5 ft	90			
65412	723.3 to 736.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
65357	735.4 to 736.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
65413	750.9 to 757.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
65414	773.1 to 777.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
65447	777.4 to 791.4 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141059	FOXGLOVE WAY	ASPEN LN	SUNDANCE LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65358	778.9 to 779.9 feet	Vertical Change	.31"	5 ft	5	REF		
65415	792.4 to 794.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
65359	794.7 to 795.7 feet	Vertical Change	.4"	5 ft	5	REF		
65416	794.8 to 805.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
65448	806.3 to 821.7 feet	Key Note Segment		5 ft	77			
65417	822.1 to 823.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$320**
65418	837.1 to 840.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
65419	843.7 to 857.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
65360	851.5 to 852.5 feet	Vertical Change	-.26"	5 ft	5	REF		
65449	858.4 to 881.6 feet	Key Note Segment		5 ft	116			
65362	873.7 to 874.7 feet	Vertical Change	-.65"	5 ft	5	REF		
65363	875.5 to 876.5 feet	Vertical Change	.44"	5 ft	5	REF		
65420	882.8 to 891.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
65421	891.3 to 893.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
65422	899.6 to 933.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
65450	935.2 to 952.3 feet	Key Note Segment		5 ft	86			
65364	943.6 to 944.6 feet	Vertical Change	.52"	5 ft	5	REF		
65423	953.2 to 963.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
65451	964.6 to 988.3 feet	Key Note Segment		5 ft	119			
65424	988.7 to 990.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
65425	990.8 to 1013.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
65365	1010.6 to 1011.6 feet	Vertical Change	.92"	5 ft	5	REF		
65426	1020.2 to 1031.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
65427	1031.7 to 1040.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
65452	1041.3 to 1055.8 feet	Key Note Segment		5 ft	73			
65428	1056.8 to 1058.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
65429	1059.2 to 1070.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
65453	1071.0 to 1082.3 feet	Key Note Segment		5 ft	57			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141059	FOXGLOVE WAY	ASPEN LN	SUNDANCE LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65430	1083.3 to 1086.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
65366	1083.5 to 1084.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
65431	1090.0 to 1103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
65432	1103.3 to 1114.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**

TOTAL COST FOR: N *side of* **FOXGLOVE WAY** *Starting at:* **ASPEN LN** **$280,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141038	FOXGLOVE WAY	ASPEN LN	IRONWOOD WAY	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65150	2.1 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,520**
65151	29.1 to 34.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
65152	36.0 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
65153	42.1 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
65154	45.5 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
65155	58.0 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
65156	72.3 to 74.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
65149	73.0 to 74.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
65157	74.8 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
65158	93.3 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
65159	97.9 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
65160	138.2 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **FOXGLOVE WAY** *Starting at:* **ASPEN LN** **$57,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141051	FOXGLOVE WAY	IRONWOOD WAY	N SCHNOOR AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65323	1.6 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
65324	14.0 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
65325	30.5 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
65318	39.5 to 40.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
65326	42.4 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
65327	50.2 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
65328	84.8 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
65329	94.8 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
65330	107.2 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
65331	110.7 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
65332	114.3 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
65333	131.5 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
65320	137.0 to 138.0 feet	**Vertical Change**	-1.26"	5 ft	5	REF		
65334	148.6 to 153.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
65335	153.1 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
65336	163.8 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
65337	168.1 to 181.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
65321	175.9 to 176.9 feet	**Vertical Change**	-.52"	5 ft	5	REF		
65322	182.5 to 183.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
65338	183.9 to 196.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
65339	196.2 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: S *side of* **FOXGLOVE WAY** *Starting at:* **IRONWOOD WAY** **$70,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041255	FOXGLOVE WAY	N SCHNOOR AVE	FOXGLOVE WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121538	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
121523	3.9 to 4.9 feet	Vertical Change	.29"	5 ft	5	REF		
121524	6.2 to 8.9 feet	Vertical Change	-.37"	5 ft	14	REF		
121539	8.6 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
121525	11.8 to 12.8 feet	Vertical Change	.26"	5 ft	5	REF		
121526	14.1 to 15.1 feet	Vertical Change	-.28"	5 ft	5	REF		
121527	16.3 to 17.3 feet	Vertical Change	.27"	5 ft	5	REF		
121547	17.5 to 18.5 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
121540	23.8 to 37.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
121548	30.8 to 31.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
121528	35.5 to 36.5 feet	Vertical Change	.44"	5 ft	5	REF		
121541	37.7 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
121529	39.1 to 40.1 feet	Vertical Change	.28"	5 ft	5	REF		
121531	42.6 to 46.2 feet	Vertical Change	.29"	5 ft	18	REF		
121532	47.0 to 48.0 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
121549	47.3 to 48.3 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
121533	49.1 to 50.1 feet	Vertical Change	.26"	5 ft	5	REF		
121542	74.8 to 87.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
121543	88.4 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
121535	96.2 to 97.2 feet	Vertical Change	-.31"	5 ft	5	REF		
121544	99.6 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	217	SF	$120	**$25,980**
121536	109.1 to 110.1 feet	Vertical Change	.36"	5 ft	5	REF		
121537	143.0 to 144.0 feet	Vertical Change	.43"	5 ft	5	LF	$75	**$375**
121545	148.8 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121546	152.0 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**

TOTAL COST FOR: S *side of* **FOXGLOVE WAY** *Starting at:* **N SCHNOOR AVE** **$90,747.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141132	FOXGLOVE WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65812	0.7 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
65813	8.5 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
65859	24.5 to 48.0 feet	Key Note Segment		5 ft	118			
65814	49.4 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
65815	53.6 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
65794	54.4 to 55.4 feet	**Vertical Change**	-1.06"	5 ft	5	REF		
65816	71.6 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
65860	84.4 to 98.8 feet	Key Note Segment		5 ft	72			
65795	85.4 to 86.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
65817	108.8 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
65861	113.3 to 136.6 feet	Key Note Segment		5 ft	117			
65796	156.2 to 157.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
65818	156.3 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65862	167.0 to 189.4 feet	Key Note Segment		5 ft	112			
65819	189.4 to 190.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
65797	201.2 to 202.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
65798	214.0 to 215.0 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
65863	219.8 to 242.4 feet	Key Note Segment		5 ft	113			
65820	242.6 to 248.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
65821	248.4 to 261.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
65799	257.5 to 258.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
65822	264.8 to 266.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
65823	267.9 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
65800	268.1 to 269.1 feet	**Vertical Change**	.68"	5 ft	5	REF		
65864	271.8 to 294.6 feet	Key Note Segment		5 ft	114			
65824	294.8 to 300.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**
65825	303.3 to 311.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
65826	313.3 to 319.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141132	FOXGLOVE WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65827	321.5 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
65865	326.5 to 348.3 feet	Key Note Segment		5 ft	109			
65828	349.3 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65829	354.3 to 359.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
65801	359.5 to 360.5 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
65830	374.3 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
65866	380.8 to 401.4 feet	Key Note Segment		5 ft	103			
65802	381.8 to 382.8 feet	**Vertical Change**	-.91"	5 ft	5	REF		
65803	403.0 to 404.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
65831	405.8 to 412.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
65804	412.6 to 413.6 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
65832	423.0 to 424.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
65833	429.9 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
65867	433.3 to 446.9 feet	Key Note Segment		5 ft	68			
65805	441.9 to 442.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
65834	447.8 to 450.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
65835	454.9 to 464.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
65836	476.3 to 485.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
65868	485.2 to 506.2 feet	Key Note Segment		5 ft	105			
65837	509.9 to 516.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
65806	519.9 to 520.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
65838	524.0 to 525.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
65839	534.1 to 539.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
65869	539.3 to 554.5 feet	Key Note Segment		5 ft	76			
65840	554.7 to 557.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
65807	570.3 to 571.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
65841	575.1 to 591.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$10,020**
65808	575.3 to 576.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141132	FOXGLOVE WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65870	591.8 to 614.0 feet	Key Note Segment		5 ft	111			
65871	591.8 to 667.9 feet	Key Note Segment		5 ft	381			
65809	608.0 to 609.0 feet	Vertical Change	.26"	5 ft	5	REF		
65842	615.0 to 621.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	34	SF	$40	$1,360
65843	633.3 to 638.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,080
65844	642.8 to 655.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	65	SF	$40	$2,600
65845	657.6 to 667.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	52	SF	$40	$2,060
65872	697.3 to 720.3 feet	Key Note Segment		5 ft	115			
65846	720.3 to 721.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$300
65847	725.0 to 726.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
65848	730.1 to 732.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
65849	735.6 to 747.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
65873	748.8 to 772.5 feet	Key Note Segment		5 ft	119			
65850	773.9 to 775.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
65810	774.4 to 775.4 feet	Vertical Change	-.28"	5 ft	5	REF		
65851	791.0 to 794.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
65852	797.0 to 798.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
65853	812.0 to 813.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
65854	820.1 to 824.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
65811	822.4 to 823.4 feet	Vertical Change	-.71"	5 ft	5	REF		
65874	827.7 to 846.1 feet	Key Note Segment		5 ft	92			
65855	846.8 to 850.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
65856	850.8 to 862.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,200
65875	862.8 to 884.8 feet	Key Note Segment		5 ft	110			
65857	886.7 to 902.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	$9,300
65858	903.3 to 908.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000

TOTAL COST FOR: S *side of* **FOXGLOVE WAY** *Starting at:* **SUNDANCE LN** **$145,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140824	FREDERICK CT	STEPHANIE LN	STEPHANIE LN	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63691	0.0 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
63692	9.0 to 18.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
63693	21.4 to 27.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
63726	27.6 to 48.0 feet	Key Note Segment		5 ft	102			
63674	36.7 to 37.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
63675	50.0 to 51.0 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
63694	51.2 to 57.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
63695	59.7 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
63696	81.7 to 88.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
63727	88.5 to 115.3 feet	Key Note Segment		5 ft	134			
63736	115.7 to 117.3 feet		5.0-6.0%	5 ft	8			
63697	119.0 to 121.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
63698	121.3 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
63699	129.8 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
63700	149.0 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
63701	157.7 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
63728	159.8 to 181.3 feet	Key Note Segment		5 ft	107			
63676	164.9 to 165.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
63677	167.1 to 168.1 feet	**Vertical Change**	-.42"	5 ft	5	REF		
63678	179.7 to 180.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
63679	185.8 to 186.8 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
63729	187.8 to 210.5 feet	Key Note Segment		5 ft	114			
63702	211.5 to 212.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
63703	213.3 to 226.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
63704	226.1 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
63680	239.6 to 240.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
63705	243.7 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63706	248.8 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140824	FREDERICK CT	STEPHANIE LN	STEPHANIE LN	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63707	256.8 to 258.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
63708	262.4 to 266.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
63730	268.2 to 295.4 feet	Key Note Segment		5 ft	136			
63681	268.4 to 269.4 feet	**Vertical Change**	-.72"	5 ft	5	REF		
63709	298.8 to 300.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
63710	304.7 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63682	307.5 to 308.5 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
63711	313.8 to 317.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
63683	317.2 to 318.2 feet	**Vertical Change**	-.61"	5 ft	5	REF		
63731	317.7 to 336.0 feet	Key Note Segment		5 ft	92			
63712	347.3 to 353.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
63732	353.2 to 370.5 feet	Key Note Segment		5 ft	87			
63684	387.3 to 388.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
63713	388.1 to 394.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
63714	394.8 to 406.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
63715	409.3 to 415.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
63716	415.0 to 418.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
63733	418.4 to 439.3 feet	Key Note Segment		5 ft	105			
63685	419.6 to 420.6 feet	**Vertical Change**	-.57"	5 ft	5	REF		
63686	428.9 to 429.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
63687	440.7 to 441.7 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
63717	443.3 to 468.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,820**
63718	468.0 to 474.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
63719	480.8 to 483.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
63734	483.9 to 503.8 feet	Key Note Segment		5 ft	100			
63688	505.1 to 506.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
63720	506.4 to 507.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63721	508.3 to 517.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140824	FREDERICK CT	STEPHANIE LN	STEPHANIE LN	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63722	519.4 to 538.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,340**
63723	542.9 to 543.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63735	549.3 to 572.1 feet	Key Note Segment		5 ft	114			
63690	550.9 to 551.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
63724	574.3 to 586.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
63725	588.5 to 606.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,980**
63737	604.9 to 605.9 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N / S *side of* **FREDERICK CT** *Starting at:* **STEPHANIE LN** **$151,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140925	FREDERICK WAY	ARBELLA LN	STEPHANIE LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64434	0.0 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
64435	10.5 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
64463	14.1 to 35.6 feet	Key Note Segment		5 ft	108			
64420	25.5 to 26.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
64421	35.8 to 36.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
64436	38.1 to 48.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
64422	46.5 to 47.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
64437	52.6 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
64438	60.3 to 75.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
64464	78.4 to 98.7 feet	Key Note Segment		5 ft	101			
64423	88.8 to 89.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64439	100.8 to 120.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
64424	120.7 to 121.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
64440	122.2 to 127.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
64441	130.7 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
64442	137.3 to 141.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
64465	142.3 to 163.1 feet	Key Note Segment		5 ft	104			
64425	152.3 to 153.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
64443	166.1 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
64426	177.5 to 178.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
64444	182.8 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
64445	198.6 to 206.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
64466	206.4 to 226.3 feet	Key Note Segment		5 ft	100			
64446	228.8 to 231.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
64447	231.6 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
64427	249.0 to 250.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
64448	256.6 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	248	SF	$120	**$29,820**
64428	268.4 to 269.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140925	FREDERICK WAY	ARBELLA LN	STEPHANIE LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64429	294.8 to 295.8 feet	Vertical Change	.36"	5 ft	5	REF		
64467	307.6 to 328.2 feet	Key Note Segment		5 ft	103			
64430	307.9 to 308.9 feet	Vertical Change	.31"	5 ft	5	REF		
64449	329.8 to 334.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
64450	337.3 to 343.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
64431	339.1 to 340.1 feet	Vertical Change	.3"	5 ft	5	REF		
64451	343.4 to 350.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
64452	354.1 to 369.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
64468	369.8 to 390.4 feet	Key Note Segment		5 ft	103			
64432	391.4 to 392.4 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$375**
64453	393.7 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,760**
64469	434.2 to 453.4 feet	Key Note Segment		5 ft	96			
64454	457.2 to 458.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64455	462.7 to 467.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
64456	469.3 to 479.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
64457	485.2 to 490.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
64458	492.7 to 496.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
64459	496.0 to 498.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
64470	499.6 to 520.8 feet	Key Note Segment		5 ft	106			
64433	500.3 to 501.3 feet	Vertical Change	.27"	5 ft	5	REF		
64460	522.4 to 528.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
64471	529.6 to 549.3 feet	Key Note Segment		5 ft	98			
64461	556.3 to 580.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
64462	580.9 to 584.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **FREDERICK WAY** *Starting at:* **ARBELLA LN** **$194,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140930	FREDERICK WAY	STEPHANIE LN	ARBELLA LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64472	2.5 to 3.5 feet	Vertical Change	-.34"	5 ft	5	REF		
64488	2.5 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
64489	7.2 to 10.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
64473	10.2 to 11.2 feet	Vertical Change	.3"	5 ft	5	REF		
64490	13.4 to 33.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,820**
64474	22.5 to 23.5 feet	Vertical Change	.46"	5 ft	5	REF		
64520	33.1 to 54.8 feet	Key Note Segment		5 ft	109			
64475	45.0 to 46.0 feet	Vertical Change	.28"	5 ft	5	REF		
64491	56.0 to 57.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
64492	58.4 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
64493	62.1 to 98.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	182	SF	$120	**$21,840**
64476	86.8 to 87.8 feet	Vertical Change	.49"	5 ft	5	REF		
64521	98.8 to 120.3 feet	Key Note Segment		5 ft	108			
64477	110.1 to 111.1 feet	Vertical Change	.28"	5 ft	5	REF		
64478	120.2 to 121.2 feet	Vertical Change	-.33"	5 ft	5	REF		
64494	121.6 to 126.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
64495	126.3 to 149.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	114	SF	$120	**$13,680**
64496	149.6 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
64522	163.4 to 182.7 feet	Key Note Segment		5 ft	97			
64497	185.7 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
64523	189.4 to 209.3 feet	Key Note Segment		5 ft	100			
64479	199.0 to 200.0 feet	Vertical Change	.4"	5 ft	5	REF		
64498	212.8 to 215.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
64499	217.9 to 222.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
64500	224.3 to 226.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
64480	226.2 to 227.2 feet	Vertical Change	.34"	5 ft	5	REF		
64501	228.4 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
64481	239.2 to 240.2 feet	Vertical Change	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140930	FREDERICK WAY	STEPHANIE LN	ARBELLA LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64482	250.1 to 251.1 feet	Vertical Change	.4"	5 ft	5	REF		
64524	252.4 to 272.7 feet	Key Note Segment		5 ft	102			
64502	275.3 to 276.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
64503	276.6 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,580**
64504	298.5 to 311.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
64483	302.4 to 303.4 feet	Vertical Change	.47"	5 ft	5	REF		
64505	311.1 to 315.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
64525	316.3 to 337.0 feet	Key Note Segment		5 ft	104			
64506	338.8 to 353.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
64484	351.9 to 352.9 feet	Vertical Change	.5"	5 ft	5	REF		
64507	355.7 to 361.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
64508	363.3 to 377.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
64485	367.2 to 368.2 feet	Vertical Change	.49"	5 ft	5	REF		
64526	379.2 to 400.9 feet	Key Note Segment		5 ft	109			
64509	403.8 to 406.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
64510	406.8 to 430.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
64511	432.7 to 434.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
64512	434.0 to 444.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
64513	445.1 to 462.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
64514	465.2 to 480.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
64527	480.9 to 502.1 feet	Key Note Segment		5 ft	106			
64515	510.0 to 545.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	175	SF	$120	**$21,000**
64528	545.6 to 565.3 feet	Key Note Segment		5 ft	98			
64486	555.9 to 556.9 feet	Vertical Change	.28"	5 ft	5	REF		
64516	567.8 to 584.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
64487	585.6 to 586.6 feet	Vertical Change	.26"	5 ft	5	REF		
64517	586.6 to 599.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
64518	599.1 to 601.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140930	FREDERICK WAY	STEPHANIE LN	ARBELLA LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64519	604.5 to 607.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: S *side of* **FREDERICK WAY** *Starting at:* **STEPHANIE LN** **$213,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261325	FRESHET DR	SAN PIETRO DR	SHORESIDE DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109426	20.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
109422	22.8 to 23.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
109423	44.8 to 45.8 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
109427	47.4 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109428	63.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
109429	76.1 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
109430	99.3 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
109431	109.8 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
109432	130.1 to 134.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
109433	151.0 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
109424	153.9 to 154.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109425	166.3 to 167.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
109434	176.9 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: N *side of* **FRESHET DR** *Starting at:* **SAN PIETRO DR** **$44,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261308	FRESHET DR	SHORESIDE DR	SAN PIETRO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109316	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
109332	8.0 to 28.3 feet	Key Note Segment		5 ft	102			
109308	33.0 to 34.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
109317	35.3 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109333	36.7 to 55.4 feet	Key Note Segment		5 ft	93			
109318	62.9 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
109319	73.2 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
109320	81.3 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
109321	86.3 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
109334	92.4 to 113.3 feet	Key Note Segment		5 ft	105			
109309	103.7 to 104.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
109322	113.4 to 114.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
109335	116.7 to 135.8 feet	Key Note Segment		5 ft	96			
109310	136.9 to 137.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
109323	154.4 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
109311	158.2 to 159.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109324	162.7 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109325	182.1 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
109326	190.1 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
109336	192.3 to 211.7 feet	Key Note Segment		5 ft	97			
109327	212.5 to 213.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$240**
109312	214.8 to 218.5 feet	**Vertical Change**	-.31"	5 ft	19	LF	$75	**$1,388**
109328	216.5 to 217.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
109337	217.8 to 248.9 feet	Key Note Segment		5 ft	156			
109313	229.6 to 230.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
109329	249.8 to 251.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
109330	253.1 to 254.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109331	299.3 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261308	FRESHET DR	SHORESIDE DR	SAN PIETRO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109338	302.2 to 321.7 feet	Key Note Segment		5 ft	98			
109314	302.7 to 303.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
109315	320.5 to 321.5 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **FRESHET DR** *Starting at:* **SHORESIDE DR** **$29,517.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202101106	FRESNO ST	717 FRESNO ST	E RIVERSIDE DR	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131154	1.3 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
131155	7.0 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
131159	17.6 to 36.4 feet	Key Note Segment		5 ft	94			
131150	36.9 to 37.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
131156	40.4 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
131151	40.6 to 41.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
131160	46.4 to 67.8 feet	Key Note Segment		5 ft	107			
131152	65.5 to 66.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
131157	69.9 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
131161	88.3 to 110.5 feet	Key Note Segment		5 ft	111			
131153	110.4 to 111.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
131158	112.6 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: E *side of* **FRESNO ST** *Starting at:* **717 FRESNO ST** **$14,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202101125	FRESNO ST	785 FRESNO ST	801 FRESNO ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131303	1.1 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
131305	3.4 to 22.7 feet	Key Note Segment		5 ft	97			
131304	25.0 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
131306	30.8 to 53.1 feet	Key Note Segment		5 ft	112			
131300	52.5 to 53.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
131307	54.6 to 102.1 feet	Key Note Segment		5 ft	238			
131301	94.5 to 95.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
131302	102.1 to 103.1 feet	**Vertical Change**	.83"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **FRESNO ST** *Starting at:* **785 FRESNO ST** **$3,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202101124	FRESNO ST	E RIVERSIDE DR	771 FRESNO ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131295	0.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
131293	3.6 to 4.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
131297	5.3 to 23.4 feet	Key Note Segment		5 ft	91			
131296	24.6 to 30.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
131294	28.5 to 31.9 feet	**Vertical Change**	.28"	5 ft	17	REF		
131298	30.8 to 48.8 feet	Key Note Segment		5 ft	90			

TOTAL COST FOR: E *side of* **FRESNO ST** *Starting at:* **E RIVERSIDE DR** **$6,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202101150	FRESNO ST	E RIVERSIDE DR	925 FRESNO ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131362	0.0 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
131360	1.8 to 2.8 feet	**Vertical Change**	1.24"	5 ft	5	REF		
131363	8.3 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
131364	22.5 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
131365	44.0 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
131366	74.3 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
131367	81.4 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**

TOTAL COST FOR: W *side of* **FRESNO ST** *Starting at:* **E RIVERSIDE DR** **$35,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131021	FRITZ ST	CARMEL ST	MILOW ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61567	0.0 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
61566	14.8 to 15.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
61568	15.5 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
61569	36.4 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
61570	50.2 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
61571	64.8 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	365	SF	$120	**$43,800**
61572	140.4 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
61573	142.4 to 143.8 feet		5.0-6.0%	5 ft	7			
61574	143.8 to 144.8 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: W *side of* **FRITZ ST** *Starting at:* **CARMEL ST** **$72,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131011	FRITZ ST	MILOW ST	CARMEL ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61509	1.1 to 22.6 feet	Key Note Segment		5 ft	107			
61492	11.2 to 12.2 feet	Vertical Change	.27"	5 ft	5	REF		
61499	30.1 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
61510	34.2 to 57.3 feet	Key Note Segment		5 ft	115			
61500	74.0 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
61501	84.3 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,680
61511	97.3 to 119.1 feet	Key Note Segment		5 ft	109			
61512	123.2 to 145.1 feet	Key Note Segment		5 ft	110			
61493	134.6 to 135.6 feet	Vertical Change	.31"	5 ft	5	REF		
61502	145.6 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
61503	158.8 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
61504	169.2 to 193.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	$14,700
61494	181.9 to 182.9 feet	Vertical Change	2.96"	5 ft	5	REF		
61513	193.8 to 212.8 feet	Key Note Segment		5 ft	95			
61495	204.8 to 205.8 feet	Vertical Change	.33"	5 ft	5	REF		
61505	214.7 to 215.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
61506	216.1 to 218.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
61514	219.2 to 244.9 feet	Key Note Segment		5 ft	129			
61496	230.8 to 231.8 feet	Vertical Change	.31"	5 ft	5	REF		
61497	245.1 to 246.1 feet	Vertical Change	.47"	5 ft	5	REF		
61507	251.5 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
61498	257.9 to 258.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
61508	269.1 to 271.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500

TOTAL COST FOR: E *side of* **FRITZ ST** *Starting at:* **MILOW ST** **$39,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311352	GABRIEL WAY	LUCIA WAY	POPOLI WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115508	3.4 to 4.4 feet	Vertical Change	.47"	5 ft	5	REF		
115509	3.6 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
115510	7.3 to 9.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
115515	11.3 to 27.0 feet	Key Note Segment		5 ft	79			
115511	27.7 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
115516	41.0 to 55.6 feet	Key Note Segment		5 ft	73			
115512	56.1 to 64.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	40	SF	$40	**$1,600**
115513	67.3 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
115514	77.5 to 161.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	420	SF	$120	**$50,340**

TOTAL COST FOR: S *side of* **GABRIEL WAY** *Starting at:* **LUCIA WAY** **$67,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311412	GABRIEL WAY	POPOLI WAY	LUCIA WAY	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115672	4.8 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
115661	7.7 to 8.7 feet	**Vertical Change**	.46"	4 ft	4	LF	$75	**$300**
115673	11.3 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
115662	13.9 to 14.9 feet	**Vertical Change**	.29"	4 ft	4	REF		
115674	32.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
115663	36.5 to 37.5 feet	**Vertical Change**	.6"	4 ft	4	SF	$75	**$300**
115664	46.1 to 47.1 feet	**Vertical Change**	-1.29"	4 ft	4	SF	$75	**$300**
115675	51.5 to 53.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
115682	53.9 to 67.8 feet	Key Note Segment		4 ft	56			
115665	68.4 to 69.4 feet	**Vertical Change**	.28"	4 ft	4	REF		
115676	71.8 to 79.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,552**
115683	79.8 to 93.8 feet	Key Note Segment		4 ft	56			
115666	94.9 to 95.9 feet	**Vertical Change**	.32"	4 ft	4	REF		
115677	95.8 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,320**
115685	97.8 to 98.8 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
115667	98.3 to 102.0 feet	**Vertical Change**	.27"	4 ft	15	REF		
115678	107.1 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$8,976**
115679	127.9 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
115684	130.3 to 143.4 feet	Key Note Segment		4 ft	52			
115668	130.9 to 131.9 feet	**Vertical Change**	.41"	4 ft	4	REF		
115680	143.4 to 160.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	66	SF	$40	**$2,656**
115669	145.6 to 146.6 feet	**Vertical Change**	.47"	4 ft	4	REF		
115681	160.0 to 164.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	19	SF	$120	**$2,304**
115670	162.2 to 163.2 feet	**Vertical Change**	1.33"	4 ft	4	REF		
115671	164.9 to 165.9 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: N *side of* **GABRIEL WAY** *Starting at:* **POPOLI WAY** **$28,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111150	GAMAY AVE	BARBERA AVE	PETITE AVE	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91532	0.7 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
91533	4.2 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91534	10.6 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
91530	18.1 to 19.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
91535	32.8 to 36.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
91536	39.2 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,660**
91537	56.9 to 68.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$7,020**
91538	72.4 to 75.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
91539	75.9 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91531	90.2 to 91.2 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
91540	116.6 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
91541	150.1 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91542	158.3 to 159.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
91543	162.2 to 163.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91545	163.2 to 165.7 feet		5.0-6.0%	5 ft	13			
91546	163.2 to 165.7 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
91544	163.7 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **BARBERA AVE** **$41,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111148	GAMAY AVE	CHABLIS AVE	BARBERA AVE	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91517	0.0 to 5.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
91518	7.2 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91519	10.8 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
91520	41.0 to 49.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
91521	50.9 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
91512	66.9 to 67.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
91513	79.8 to 80.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
91522	84.4 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
91523	100.0 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
91514	100.6 to 101.6 feet	**Vertical Change**	.61"	5 ft	5	REF		
91524	111.7 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
91515	118.8 to 119.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
91525	131.2 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
91516	139.7 to 140.7 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
91526	142.8 to 151.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
91527	151.0 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
91528	156.4 to 158.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
91529	162.3 to 164.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **CHABLIS AVE** **$82,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111425	GAMAY AVE	DOUBLE TREE CT	S WOLFTRAP ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92513	0.3 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
92506	6.4 to 7.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
92514	11.0 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
92507	15.0 to 16.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
92515	35.7 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
92508	41.1 to 42.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92516	45.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
92517	51.1 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,700**
92518	67.8 to 70.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
92519	71.8 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
92520	82.4 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
92509	86.4 to 87.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
92510	95.5 to 96.5 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
92521	108.6 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92522	116.8 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
92523	128.9 to 133.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
92524	135.8 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
92525	142.1 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
92526	153.8 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
92527	168.7 to 172.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
92511	174.2 to 175.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
92528	174.9 to 178.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92512	179.4 to 180.4 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **DOUBLE TREE CT** **$65,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191103	GAMAY AVE	FAIR OAK AVE	STADIUM RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103005	1.3 to 5.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
103006	5.4 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
102995	12.2 to 13.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
103007	14.7 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
103008	23.0 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
102996	26.3 to 27.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
103020	27.2 to 58.4 feet	Key Note Segment		5 ft	156			
102997	29.4 to 30.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
103009	61.6 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
103021	67.0 to 86.4 feet	Key Note Segment		5 ft	97			
103010	87.8 to 92.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
103011	92.1 to 119.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,320**
103022	120.8 to 149.5 feet	Key Note Segment		5 ft	144			
102999	147.6 to 148.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
103012	151.8 to 172.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,180**
103023	173.8 to 194.3 feet	Key Note Segment		5 ft	103			
103013	194.3 to 208.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	69	SF	$40	**$2,740**
103014	210.3 to 216.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
103015	217.0 to 221.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
103016	221.7 to 224.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
103017	225.3 to 226.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103024	227.0 to 256.3 feet	Key Note Segment		5 ft	147			
103001	230.6 to 231.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
103002	246.2 to 247.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
103003	254.0 to 257.6 feet	**Vertical Change**	.34"	5 ft	18	REF		
103018	256.8 to 258.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
103019	258.8 to 276.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
103004	276.5 to 277.5 feet	**Vertical Change**	.43"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191103	GAMAY AVE	FAIR OAK AVE	STADIUM RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **GAMAY AVE**	*Starting at:* **FAIR OAK AVE**					**$70,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111146	GAMAY AVE	GRENACHE AVE	CHABLIS AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91495	4.9 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
91487	6.4 to 7.4 feet	**Vertical Change**	-.46"	5 ft	5	REF		
91496	9.5 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
91488	10.1 to 11.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
91497	17.4 to 19.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
91498	19.4 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
91489	20.2 to 21.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
91499	30.9 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
91500	40.9 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
91490	42.4 to 43.4 feet	**Vertical Change**	.94"	5 ft	5	REF		
91501	46.2 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
91491	62.5 to 63.5 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
91502	71.8 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
91503	88.0 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91504	92.6 to 95.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91492	104.8 to 105.8 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
91493	112.8 to 113.8 feet	**Vertical Change**	-1.68"	5 ft	5	SF	$75	**$375**
91494	119.4 to 120.4 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
91505	121.4 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
91506	130.8 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
91507	139.0 to 140.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
91508	143.3 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91509	160.7 to 165.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
91510	162.6 to 165.7 feet		5.0-6.0%	5 ft	16			
91511	162.6 to 165.7 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **GRENACHE AVE** **$40,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111048	GAMAY AVE	PETITE AVE	GRENACHE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90590	0.0 to 13.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
90656	14.5 to 28.4 feet	Key Note Segment		5 ft	70			
90553	29.3 to 30.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
90591	29.7 to 31.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
90592	32.8 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
90593	42.5 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
90594	46.1 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
90595	56.8 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
90596	57.8 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
90597	67.0 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
90657	71.3 to 87.3 feet	Key Note Segment		5 ft	80			
90598	87.3 to 94.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	37	SF	$40	**$1,480**
90599	95.0 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90658	99.7 to 116.4 feet	Key Note Segment		5 ft	84			
90554	141.5 to 142.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
90555	147.4 to 148.4 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
90600	152.1 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
90659	154.3 to 168.5 feet	Key Note Segment		5 ft	71			
90601	169.7 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
90602	183.9 to 185.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
90603	188.8 to 190.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90660	190.0 to 204.6 feet	Key Note Segment		5 ft	73			
90556	190.4 to 191.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
90604	211.2 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
90661	219.6 to 236.4 feet	Key Note Segment		5 ft	84			
90680	247.3 to 249.3 feet		5.0-6.0%	5 ft	10			
90557	255.2 to 256.2 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
90605	256.7 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111048	GAMAY AVE	PETITE AVE	GRENACHE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90558	259.4 to 260.4 feet	Vertical Change	1.27"	5 ft	5	SF	$75	$375
90559	261.5 to 262.5 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
90560	264.7 to 265.7 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
90561	271.7 to 272.7 feet	Vertical Change	.67"	5 ft	5	SF	$75	$375
90662	273.8 to 289.0 feet	Key Note Segment		5 ft	76			
90562	276.2 to 279.1 feet	Vertical Change	.51"	5 ft	15	REF		
90563	280.2 to 281.2 feet	Vertical Change	2.69"	5 ft	5	REF		
90606	291.6 to 297.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,420
90607	297.3 to 301.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,400
90681	299.5 to 300.5 feet		5.0-6.0%	5 ft	5			
90682	300.5 to 301.5 feet		6.0-7.0%	5 ft	5			
90608	301.3 to 302.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
90609	302.6 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,620
90610	319.0 to 324.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
90663	324.8 to 338.9 feet	Key Note Segment		5 ft	71			
90611	343.3 to 369.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	$15,960
90612	371.1 to 372.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
90664	373.4 to 387.2 feet	Key Note Segment		5 ft	69			
90564	374.5 to 375.5 feet	Vertical Change	-.33"	5 ft	5	REF		
90613	387.9 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
90614	397.4 to 401.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
90665	401.5 to 415.0 feet	Key Note Segment		5 ft	68			
90565	409.7 to 410.7 feet	Vertical Change	3.42"	5 ft	5	REF		
90615	415.0 to 425.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	54	SF	$40	$2,160
90616	431.9 to 439.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
90617	448.3 to 454.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
90566	457.3 to 458.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
90618	460.9 to 471.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111048	GAMAY AVE	PETITE AVE	GRENACHE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90666	473.9 to 488.0 feet	Key Note Segment		5 ft	71			
90567	474.5 to 475.5 feet	Vertical Change	-.26"	5 ft	5	REF		
90568	481.5 to 482.5 feet	Vertical Change	.35"	5 ft	5	REF		
90569	488.3 to 489.3 feet	Vertical Change	.3"	5 ft	5	REF		
90619	489.3 to 493.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
90667	507.2 to 521.3 feet	Key Note Segment		5 ft	70			
90620	524.9 to 528.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90570	533.7 to 534.7 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**
90621	546.1 to 548.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
90622	550.7 to 565.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
90571	555.2 to 556.2 feet	Vertical Change	.26"	5 ft	5	REF		
90623	565.4 to 572.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
90668	573.9 to 588.2 feet	Key Note Segment		5 ft	72			
90572	574.3 to 575.3 feet	Vertical Change	.31"	5 ft	5	REF		
90624	588.2 to 595.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	36	SF	$40	**$1,460**
90573	591.9 to 592.9 feet	Vertical Change	1.49"	5 ft	5	REF		
90669	599.8 to 614.3 feet	Key Note Segment		5 ft	73			
90574	608.0 to 609.0 feet	Vertical Change	.32"	5 ft	5	REF		
90625	618.7 to 628.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
90575	631.4 to 632.4 feet	Vertical Change	.57"	5 ft	5	SF	$75	**$375**
90626	633.9 to 636.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
90627	640.0 to 669.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
90628	670.3 to 671.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
90670	673.4 to 687.1 feet	Key Note Segment		5 ft	69			
90629	688.8 to 692.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
90630	695.0 to 702.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
90671	702.9 to 716.5 feet	Key Note Segment		5 ft	68			
90631	718.2 to 723.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111048	GAMAY AVE	PETITE AVE	GRENACHE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90632	727.0 to 735.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
90633	738.9 to 741.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
90634	743.0 to 746.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
90635	748.7 to 751.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
90636	751.8 to 763.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
90576	760.4 to 761.4 feet	**Vertical Change**	-.67"	5 ft	5	REF		
90637	763.4 to 772.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
90683	766.4 to 767.8 feet		6.0-7.0%	5 ft	7			
90672	775.5 to 789.0 feet	Key Note Segment		5 ft	68			
90577	795.6 to 796.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
90638	806.3 to 809.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90639	813.1 to 814.8 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	9	SF	$120	**$1,020**
90578	816.1 to 817.1 feet	**Vertical Change**	-.9"	5 ft	5	SF	$75	**$375**
90684	821.2 to 822.8 feet		5.0-6.0%	5 ft	8			
90673	824.5 to 840.0 feet	Key Note Segment		5 ft	78			
90640	844.4 to 845.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
90641	846.8 to 849.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
90674	850.8 to 865.2 feet	Key Note Segment		5 ft	72			
90579	865.3 to 866.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
90642	870.7 to 878.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
90643	892.2 to 893.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90644	896.8 to 898.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90675	900.3 to 925.5 feet	Key Note Segment		5 ft	126			
90580	909.7 to 910.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
90645	927.1 to 938.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
90646	940.7 to 942.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
90647	944.8 to 946.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
90648	948.8 to 961.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111048	GAMAY AVE	PETITE AVE	GRENACHE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90676	968.5 to 982.4 feet	Key Note Segment		5 ft	70			
90581	971.4 to 972.4 feet	Vertical Change	.7"	5 ft	5	REF		
90582	983.0 to 984.0 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
90583	995.7 to 996.7 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
90649	998.8 to 1000.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
90677	1001.4 to 1014.9 feet	Key Note Segment		5 ft	68			
90584	1001.8 to 1002.8 feet	Vertical Change	.47"	5 ft	5	REF		
90585	1008.7 to 1009.7 feet	Vertical Change	.46"	5 ft	5	REF		
90650	1016.7 to 1028.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,960
90586	1037.3 to 1038.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
90587	1046.0 to 1047.0 feet	Vertical Change	-.77"	5 ft	5	SF	$75	$375
90651	1048.8 to 1050.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$900
90678	1050.3 to 1066.3 feet	Key Note Segment		5 ft	80			
90652	1066.3 to 1073.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	36	SF	$40	$1,440
90588	1066.8 to 1067.8 feet	Vertical Change	-.3"	5 ft	5	REF		
90653	1074.1 to 1081.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
90589	1075.0 to 1076.0 feet	Vertical Change	.5"	5 ft	5	REF		
90654	1089.2 to 1090.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
90655	1093.3 to 1097.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
90679	1103.3 to 1118.4 feet	Key Note Segment		5 ft	76			

TOTAL COST FOR: S/E/N *side of* **GAMAY AVE** *Starting at:* **PETITE AVE** **$225,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111359	GAMAY AVE	S DOUBLE TREE WAY	S TIMBERLINE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92303	1.5 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
92291	9.3 to 10.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
92317	12.6 to 32.2 feet	Key Note Segment		5 ft	98			
92292	15.2 to 16.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
92293	22.4 to 23.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
92304	33.3 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
92318	55.0 to 75.7 feet	Key Note Segment		5 ft	104			
92294	59.0 to 60.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
92295	65.7 to 66.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
92319	81.7 to 101.8 feet	Key Note Segment		5 ft	101			
92296	85.1 to 86.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
92297	98.4 to 99.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
92305	102.2 to 119.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	88	SF	$40	**$3,520**
92306	123.6 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92307	128.1 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
92308	137.8 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
92320	142.4 to 161.8 feet	Key Note Segment		5 ft	97			
92309	167.0 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
92321	169.1 to 188.3 feet	Key Note Segment		5 ft	96			
92298	178.6 to 179.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
92310	193.5 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
92311	202.3 to 227.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
92322	228.3 to 249.3 feet	Key Note Segment		5 ft	105			
92323	255.1 to 276.1 feet	Key Note Segment		5 ft	105			
92312	276.1 to 283.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	37	SF	$40	**$1,480**
92313	286.8 to 289.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
92314	290.3 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
92324	296.9 to 318.9 feet	Key Note Segment		5 ft	110			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111359	GAMAY AVE	S DOUBLE TREE WAY	S TIMBERLINE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92300	302.1 to 303.1 feet	Vertical Change	.28"	5 ft	5	REF		
92315	319.4 to 321.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	**$440**
92316	323.9 to 328.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
92302	334.3 to 335.3 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **GAMAY AVE** *Starting at:* **S DOUBLE TREE WAY** **$59,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111406	GAMAY AVE	S TIMBERLINE DR	WESTBERRY BVD	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92347	0.7 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
92343	9.3 to 10.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
92348	9.8 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
92344	13.2 to 14.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
92349	16.6 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
92352	23.3 to 36.4 feet	Key Note Segment		5 ft	66			
92353	48.2 to 63.3 feet	Key Note Segment		5 ft	76			
92345	95.9 to 96.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92354	115.5 to 129.1 feet	Key Note Segment		5 ft	68			
92355	140.8 to 155.7 feet	Key Note Segment		5 ft	74			
92350	155.7 to 157.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
92351	165.3 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
92346	168.7 to 169.7 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **GAMAY AVE** *Starting at:* **S TIMBERLINE DR** **$16,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111419	GAMAY AVE	S TIMBERLINE DR	DOUBLE TREE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92434	1.0 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
92435	9.4 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
92436	27.3 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
92437	35.4 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
92438	53.0 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
92439	62.3 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
92440	72.4 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
92441	88.8 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92442	92.3 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92465	94.3 to 113.7 feet	Key Note Segment		5 ft	97			
92443	113.7 to 116.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
92466	120.0 to 139.3 feet	Key Note Segment		5 ft	97			
92444	140.8 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
92445	147.3 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
92426	150.0 to 151.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
92446	158.3 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
92447	172.3 to 174.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
92448	177.5 to 183.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
92427	182.9 to 183.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		
92467	183.4 to 203.3 feet	Key Note Segment		5 ft	100			
92428	194.4 to 195.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
92449	207.6 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92468	209.2 to 229.5 feet	Key Note Segment		5 ft	102			
92450	230.7 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
92451	239.6 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
92452	254.9 to 266.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
92453	269.4 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92469	273.5 to 292.6 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111419	GAMAY AVE	S TIMBERLINE DR	DOUBLE TREE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92454	293.7 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
92470	298.6 to 318.7 feet	Key Note Segment		5 ft	100			
92429	299.7 to 300.7 feet	**Vertical Change**	2.64"	5 ft	5	REF		
92430	302.0 to 303.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
92455	319.7 to 340.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
92431	320.1 to 321.1 feet	**Vertical Change**	.56"	5 ft	5	REF		
92432	332.1 to 333.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
92456	345.3 to 364.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
92457	368.9 to 371.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
92458	377.9 to 381.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
92459	385.9 to 390.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
92460	390.7 to 392.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
92461	399.5 to 400.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92462	401.9 to 407.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
92463	407.3 to 409.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92464	421.6 to 441.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
92433	427.7 to 428.7 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **S TIMBERLINE DR** **$116,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111336	GAMAY AVE	S WOLFTRAP ST	S DOUBLE TREE WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92104	6.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
92094	10.1 to 11.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
92115	16.8 to 35.9 feet	Key Note Segment		5 ft	96			
92095	18.7 to 19.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
92105	38.7 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
92116	41.8 to 62.3 feet	Key Note Segment		5 ft	103			
92096	52.8 to 53.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
92106	93.3 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
92097	98.1 to 99.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
92107	106.8 to 112.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
92098	107.7 to 108.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
92117	114.8 to 135.3 feet	Key Note Segment		5 ft	103			
92099	126.2 to 127.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
92108	137.2 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
92118	141.6 to 161.2 feet	Key Note Segment		5 ft	98			
92100	152.2 to 153.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
92109	163.3 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92110	175.3 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
92101	182.9 to 183.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
92111	195.5 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
92112	211.0 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
92119	215.6 to 234.4 feet	Key Note Segment		5 ft	94			
92102	218.7 to 219.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
92103	225.6 to 226.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
92113	236.1 to 237.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
92120	240.7 to 261.2 feet	Key Note Segment		5 ft	103			
92114	264.3 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: N *side of* **GAMAY AVE** *Starting at:* **S WOLFTRAP ST** **$36,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191106	GAMAY AVE	STADIUM RD	FAIR OAK AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103027	2.4 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
103028	11.1 to 41.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	152	SF	$120	**$18,240**
103029	44.7 to 60.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
103025	47.1 to 48.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
103030	64.6 to 97.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	167	SF	$120	**$19,980**
103031	99.8 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
103032	106.5 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
103033	127.6 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
103034	131.9 to 168.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	185	SF	$120	**$22,200**
103026	132.1 to 133.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
103035	172.3 to 174.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
103036	176.5 to 179.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **GAMAY AVE** *Starting at:* **STADIUM RD** **$93,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111416	GAMAY AVE	WESTBERRY BVD	S TIMBERLINE DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92407	0.0 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
92404	5.6 to 6.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
92408	10.6 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
92405	14.3 to 15.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
92422	25.1 to 38.8 feet	Key Note Segment		5 ft	68			
92409	40.5 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
92423	51.1 to 64.5 feet	Key Note Segment		5 ft	67			
92406	65.5 to 66.5 feet	**Vertical Change**	2.94"	5 ft	5	SF	$75	**$375**
92410	68.9 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
92411	72.8 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
92412	81.5 to 84.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
92413	84.9 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
92414	96.5 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
92415	103.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
92416	108.8 to 115.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
92417	115.8 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
92418	125.3 to 127.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
92419	141.7 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
92420	161.2 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
92421	170.8 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: S *side of* **GAMAY AVE** *Starting at:* **WESTBERRY BVD** **$61,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210950	GAMAY ST	602 GAMAY ST	SANTA BONITA ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78528	3.9 to 7.8 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	20	SF	$120	**$2,340**
78529	8.2 to 11.3 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	16	SF	$120	**$1,860**
78530	11.3 to 14.3 feet	Cross Slope (PAR)	14.0-15.0%	5 ft	15	SF	$120	**$1,800**
78531	20.1 to 32.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
78532	32.8 to 41.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
78533	43.6 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
78534	50.0 to 59.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
78535	59.8 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
78536	69.1 to 75.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
78547	75.1 to 96.7 feet	Key Note Segment		5 ft	108			
78537	99.5 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
78548	101.2 to 122.1 feet	Key Note Segment		5 ft	105			
78523	111.7 to 112.7 feet	**Vertical Change**	.67"	5 ft	5	REF		
78524	121.4 to 122.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
78538	122.3 to 132.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	49	SF	$40	**$1,940**
78539	132.0 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
78540	135.9 to 165.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	147	SF	$120	**$17,640**
78541	165.4 to 176.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
78525	166.2 to 167.2 feet	**Vertical Change**	.71"	5 ft	5	REF		
78549	177.4 to 197.4 feet	Key Note Segment		5 ft	100			
78526	187.9 to 188.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
78542	198.4 to 201.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
78550	202.8 to 223.2 feet	Key Note Segment		5 ft	102			
78527	213.5 to 214.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
78543	223.9 to 229.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
78544	233.4 to 237.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
78545	238.4 to 239.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
78546	240.7 to 243.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210950	GAMAY ST	602 GAMAY ST	SANTA BONITA ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: S	*side of* **GAMAY ST**	*Starting at:* **602 GAMAY ST**						**$75,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210943	GAMAY ST	BLUERIDGE DR	STADIUM RD	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78471	3.1 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
78472	16.1 to 34.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
78468	25.3 to 26.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
78473	38.8 to 40.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
78474	47.6 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,900**
78469	50.1 to 51.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
78470	69.5 to 70.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **GAMAY ST** *Starting at:* **BLUERIDGE DR** **$35,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210953	GAMAY ST	SANTA BONITA ST	SANTA CLARA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78557	0.2 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
78558	4.6 to 17.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
78577	18.9 to 39.8 feet	Key Note Segment		5 ft	104			
78551	29.6 to 30.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78559	41.8 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
78578	45.3 to 65.2 feet	Key Note Segment		5 ft	100			
78560	66.0 to 95.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,520**
78552	93.7 to 94.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
78561	95.2 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
78562	105.3 to 119.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
78553	108.1 to 109.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
78579	119.5 to 140.6 feet	Key Note Segment		5 ft	106			
78563	140.9 to 145.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$840**
78580	145.1 to 166.3 feet	Key Note Segment		5 ft	106			
78554	162.8 to 163.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
78564	169.4 to 171.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
78565	174.4 to 177.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
78566	178.2 to 188.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
78567	188.7 to 190.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
78568	196.2 to 203.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
78569	204.5 to 214.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
78570	214.0 to 222.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
78581	222.1 to 243.5 feet	Key Note Segment		5 ft	107			
78582	248.3 to 270.2 feet	Key Note Segment		5 ft	110			
78555	259.2 to 260.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
78571	272.1 to 315.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	217	SF	$120	**$26,040**
78556	307.9 to 308.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
78572	317.6 to 324.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210953	GAMAY ST	SANTA BONITA ST	SANTA CLARA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78583	324.1 to 344.8 feet	Key Note Segment		5 ft	103			
78573	348.5 to 349.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
78584	349.8 to 370.8 feet	Key Note Segment		5 ft	105			
78574	370.9 to 379.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	45	SF	$40	**$1,780**
78575	379.8 to 383.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
78576	383.1 to 391.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: N *side of* **GAMAY ST** *Starting at:* **SANTA BONITA ST** **$108,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110210936	GAMAY ST	SANTA CLARA ST	BLUERIDGE DR	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78412	0.0 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
78413	21.3 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
78414	27.8 to 40.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
78415	43.5 to 48.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
78416	48.4 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
78417	54.8 to 73.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,920**
78409	71.0 to 72.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
78418	73.7 to 77.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
78419	77.4 to 82.7 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	26	SF	$120	**$3,180**
78420	82.7 to 86.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
78421	87.0 to 97.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	54	SF	$120	**$6,480**
78422	98.6 to 108.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	49	SF	$120	**$5,880**
78423	108.4 to 111.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
78424	111.1 to 118.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
78425	118.6 to 119.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
78426	122.1 to 132.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
78427	132.2 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
78411	145.7 to 146.7 feet	**Vertical Change**	.43"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **GAMAY ST** *Starting at:* **SANTA CLARA ST** **$84,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210948	GAMAY ST	STADIUM RD	608 GAMAY ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78488	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
78489	4.6 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
78475	6.5 to 7.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
78476	9.7 to 10.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
78490	14.8 to 25.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
78478	18.2 to 19.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
78513	25.9 to 46.8 feet	Key Note Segment		5 ft	105			
78479	45.5 to 46.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
78491	47.6 to 51.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
78514	51.3 to 71.8 feet	Key Note Segment		5 ft	103			
78492	75.3 to 89.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
78493	89.6 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
78515	103.8 to 123.0 feet	Key Note Segment		5 ft	96			
78494	123.3 to 127.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	23	SF	$40	**$900**
78495	128.0 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
78496	135.2 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
78497	139.3 to 147.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
78480	148.6 to 149.6 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
78498	152.0 to 178.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,780**
78481	153.9 to 154.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
78516	179.0 to 198.6 feet	Key Note Segment		5 ft	98			
78482	181.4 to 182.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78517	204.7 to 225.3 feet	Key Note Segment		5 ft	103			
78499	226.4 to 242.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
78500	242.8 to 265.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
78483	258.9 to 259.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
78501	265.8 to 282.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
78518	282.3 to 303.2 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110210948	GAMAY ST	STADIUM RD	608 GAMAY ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78502	304.5 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
78519	308.8 to 329.3 feet	Key Note Segment		5 ft	103			
78503	332.0 to 344.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
78504	344.2 to 348.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
78505	350.1 to 369.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
78484	359.7 to 360.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
78506	372.5 to 383.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
78485	372.6 to 373.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
78520	384.5 to 404.8 feet	Key Note Segment		5 ft	102			
78486	404.5 to 405.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
78507	406.0 to 408.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
78521	410.8 to 430.9 feet	Key Note Segment		5 ft	101			
78487	420.9 to 421.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
78508	438.3 to 449.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
78509	452.8 to 462.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
78510	468.8 to 477.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
78511	477.8 to 484.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
78512	485.1 to 488.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: S *side of* **GAMAY ST** *Starting at:* **STADIUM RD** **$148,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202101137	GARFIELD AVE	913 GARFIELD AVE	907 GARFIELD AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131353	0.8 to 7.3 feet	Key Note Segment		5 ft	33			
131346	7.3 to 9.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
131337	10.8 to 11.8 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
131347	12.5 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
131338	31.7 to 32.7 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
131354	43.8 to 51.9 feet	Key Note Segment		5 ft	41			
131348	52.2 to 60.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	$1,600
131349	65.6 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,700
131339	71.9 to 72.9 feet	Vertical Change	2.38"	5 ft	5	REF		
131340	73.9 to 74.9 feet	Vertical Change	.33"	5 ft	5	REF		
131350	80.6 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
131341	83.0 to 86.8 feet	Vertical Change	.37"	5 ft	19	REF		
131355	87.9 to 94.8 feet	Key Note Segment		5 ft	35			
131342	90.6 to 91.6 feet	Vertical Change	2.42"	5 ft	5	REF		
131351	100.2 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
131343	103.9 to 104.9 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
131352	106.9 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
131344	110.6 to 111.6 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375

TOTAL COST FOR: N *side of* **GARFIELD AVE** *Starting at:* **913 GARFIELD AVE** **$21,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281409	GARY LN	101 GARY LN	101 GARY LN	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112903	0.0 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
112902	8.5 to 9.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **101 GARY LN** **$1,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281412	GARY LN	1105 MADERA AVE	MADERA AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112916	0.0 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	236	SF	$120	**$28,320**
112904	22.3 to 23.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
112905	41.6 to 42.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
112917	49.4 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
112906	54.4 to 55.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
112918	64.1 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	282	SF	$120	**$33,780**
112907	80.0 to 81.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112908	118.6 to 119.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
112919	122.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	255	SF	$120	**$30,600**
112909	150.5 to 151.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112910	157.0 to 158.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
112911	169.9 to 170.9 feet	**Vertical Change**	.6"	5 ft	5	REF		
112912	176.3 to 177.3 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
112920	181.8 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
112913	189.2 to 190.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
112914	195.6 to 196.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
112921	200.8 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
112915	208.5 to 209.5 feet	**Vertical Change**	.57"	5 ft	5	REF		
112922	227.6 to 237.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **1105 MADERA AVE** **$128,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271556	GARY LN	1200 MADERA AVE	MADERA AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111613	12.0 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
111614	35.1 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
111615	57.7 to 88.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
111616	88.8 to 93.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
111617	93.4 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
111618	109.4 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111619	145.2 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111620	152.8 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111621	176.1 to 180.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111622	185.1 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
111623	196.0 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **1200 MADERA AVE** **$61,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211339	GARY LN	CHATOM WY	STADIUM RD	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79617	0.8 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	227	SF	$120	**$27,240**
79618	51.1 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
79619	64.3 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
79620	76.8 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
79621	81.3 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
79622	92.9 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
79623	110.0 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
79624	132.3 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,660**
79625	165.8 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	398	SF	$120	**$47,700**
79626	248.3 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
79616	249.3 to 250.3 feet	Vertical Change	-.35"	5 ft	5	REF		
79627	271.8 to 278.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
79628	278.8 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
79629	300.3 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
79630	312.3 to 315.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
79631	315.3 to 317.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
79632	319.7 to 331.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
79633	348.4 to 349.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79634	353.8 to 372.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
79635	375.0 to 440.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	326	SF	$120	**$39,060**
79636	439.3 to 440.7 feet		5.0-6.0%	5 ft	7			
79637	440.7 to 442.1 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **CHATOM WY** **$219,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211331	GARY LN	CHATOM WY	MONTEREY ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79563	0.8 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79564	45.5 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
79565	52.6 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
79566	88.0 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
79567	116.8 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79568	122.3 to 125.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
79569	130.2 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
79570	157.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
79571	171.2 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
79572	191.3 to 193.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
79573	193.7 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
79574	200.9 to 205.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79575	240.3 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
79576	293.8 to 298.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
79577	326.9 to 337.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
79578	349.5 to 351.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
79579	369.5 to 374.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
79580	378.4 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
79581	401.8 to 403.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79582	413.4 to 428.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
79583	535.8 to 536.8 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **CHATOM WY** **$60,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281508	GARY LN	COLOMBARD DR	SENECA AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113334	1.1 to 2.3 feet		5.0-6.0%	5 ft	6			
113335	9.0 to 10.2 feet		7.0-8.0%	5 ft	6			
113323	17.0 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
113324	20.7 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
113325	26.0 to 41.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
113312	34.1 to 35.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
113313	58.0 to 59.0 feet	**Vertical Change**	1.36"	5 ft	5	SF	$75	**$375**
113314	63.4 to 64.4 feet	**Vertical Change**	.98"	5 ft	5	SF	$75	**$375**
113326	64.8 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
113315	67.8 to 68.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
113327	71.2 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,200**
113316	93.4 to 94.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
113336	94.7 to 95.9 feet		5.0-6.0%	5 ft	6			
113317	96.8 to 97.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
113328	114.8 to 117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
113318	118.5 to 119.5 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
113329	121.3 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
113319	125.0 to 126.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
113330	126.6 to 140.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,580**
113320	128.2 to 129.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
113321	139.3 to 140.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113331	140.9 to 142.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
113332	142.0 to 143.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
113322	147.6 to 148.6 feet	**Vertical Change**	1.17"	5 ft	5	SF	$75	**$375**
113333	151.2 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **COLOMBARD DR** **$54,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271553	GARY LN	COLOMBARD DR	1201 COLOMBARD DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111610	0.2 to 37.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	189	SF	$120	**$22,620**
111611	37.9 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
111607	52.8 to 53.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
111608	58.3 to 59.3 feet	**Vertical Change**	1.06"	5 ft	5	REF		
111609	65.1 to 66.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
111612	68.2 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **COLOMBARD DR** **$39,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281513	GARY LN	CONCORD AVE	MONTEREY DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113357	6.0 to 7.0 feet	Vertical Change	-2.31"	5 ft	5	SF	$75	$375
113375	7.1 to 8.8 feet		6.0-7.0%	5 ft	9			
113363	15.6 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,660
113364	26.7 to 42.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	$9,240
113365	42.1 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
113358	66.0 to 69.0 feet	Vertical Change	-.48"	5 ft	15	LF	$75	$1,125
113366	68.8 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
113359	69.9 to 70.9 feet	Vertical Change	.37"	5 ft	5	REF		
113367	74.6 to 88.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	$8,280
113368	89.0 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
113369	96.1 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	$12,120
113370	122.7 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	$12,960
113360	145.2 to 146.2 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
113371	146.9 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
113372	149.0 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
113361	158.3 to 159.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
113373	161.3 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
113374	168.3 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
113362	171.6 to 172.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **CONCORD AVE** **$67,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281543	GARY LN	CONCORD AVE	SENECA DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113660	0.3 to 5.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
113661	5.9 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,140**
113662	34.2 to 36.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
113663	42.8 to 56.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
113664	57.3 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	234	SF	$120	**$28,020**
113658	105.5 to 106.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
113665	108.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
113659	111.6 to 112.6 feet	**Vertical Change**	-1"	5 ft	5	SF	$75	**$375**
113666	115.0 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
113667	126.3 to 131.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
113668	132.5 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
113669	144.8 to 157.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **CONCORD AVE** **$76,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201218	GARY LN	CRYSTAL WAY	MAJESTIC WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76463	4.7 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
76464	21.7 to 78.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	284	SF	$120	**$34,020**
76465	79.4 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
76466	96.5 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
76467	100.3 to 102.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
76468	104.5 to 108.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
76469	110.0 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
76470	119.6 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
76471	125.1 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
76472	139.9 to 152.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
76473	152.1 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
76474	154.3 to 156.2 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **CRYSTAL WAY** **$81,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201142	GARY LN	CRYSTAL WAY	STREET END	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76200	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
76201	2.8 to 6.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,944**
76202	8.3 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,588**
76203	20.7 to 24.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,214**
76204	26.9 to 30.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,674**
76205	32.7 to 66.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	151	SF	$120	**$18,090**
76206	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
76207	71.5 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$13,014**
76244	95.6 to 124.4 feet	Key Note Segment		5 ft	130			
76208	124.4 to 127.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$504**
76209	130.5 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**
76210	139.8 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
76211	146.5 to 157.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,048**
76212	160.8 to 162.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
76213	163.0 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
76214	176.7 to 190.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,398**
76215	190.9 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
76216	195.0 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**
76217	209.5 to 214.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,862**
76218	218.6 to 227.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,806**
76219	228.8 to 235.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,456**
76220	235.2 to 241.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
76221	243.3 to 256.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,182**
76222	257.6 to 261.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,214**
76223	261.7 to 268.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,672**
76224	268.8 to 294.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,770**
76225	298.8 to 315.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,802**
76226	316.3 to 323.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,050**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201142	GARY LN	CRYSTAL WAY	STREET END	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76227	328.1 to 332.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,214**
76228	332.4 to 346.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,614**
76198	332.6 to 333.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
76229	350.2 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,886**
76230	362.4 to 377.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,884**
76231	377.2 to 397.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,692**
76232	399.7 to 407.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,996**
76233	409.5 to 423.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
76234	428.0 to 442.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,722**
76235	447.3 to 451.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
76236	454.0 to 467.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,290**
76237	471.1 to 489.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,774**
76199	482.1 to 483.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
76238	489.2 to 492.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,566**
76239	492.8 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
76240	510.8 to 531.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,340**
76241	532.7 to 537.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,808**
76242	540.9 to 547.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**
76243	550.1 to 553.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **CRYSTAL WAY** **$235,242.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201055	GARY LN	DIAMOND WAY	1172 DIAMOND WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75741	3.7 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
75742	13.1 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
75743	32.4 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
75744	50.9 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
75745	54.0 to 59.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
75746	63.1 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
75740	63.7 to 64.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
75747	69.3 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **DIAMOND WAY** **$29,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201127	GARY LN	DIAMOND WAY	MAJESTIC CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76081	1.3 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
76076	27.5 to 28.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$338**
76082	28.7 to 49.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,340**
76077	47.7 to 48.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
76083	51.9 to 64.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,588**
76078	66.0 to 67.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$338**
76084	67.1 to 73.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
76085	83.2 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
76086	96.0 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,404**
76079	98.1 to 99.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
76087	99.3 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
76080	101.7 to 102.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$338**
76088	109.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
76089	115.9 to 118.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,242**
76090	121.3 to 136.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,046**
76091	136.4 to 137.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
76092	152.6 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **DIAMOND WAY** **$53,662.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201150	GARY LN	EMILY WAY	CRYSTAL WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76247	2.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
76248	24.8 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
76249	31.2 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
76245	43.6 to 44.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
76250	46.4 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
76251	55.2 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
76246	59.1 to 60.1 feet	**Vertical Change**	.96"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **EMILY WAY** **$21,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271611	GARY LN	MADERA AVE	COLOMBARD DR	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111681	2.6 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
111682	5.3 to 12.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
111683	12.7 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,240**
111670	31.5 to 32.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
111684	37.8 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,800**
111685	65.8 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111703	72.5 to 98.6 feet	Key Note Segment		5 ft	131			
111671	85.6 to 86.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
111686	98.6 to 106.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	39	SF	$40	**$1,540**
111687	106.8 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
111688	120.5 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
111689	125.8 to 139.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
111672	131.4 to 132.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
111690	139.3 to 178.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	194	SF	$120	**$23,280**
111673	182.4 to 183.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111674	186.9 to 187.9 feet	**Vertical Change**	-.76"	5 ft	5	SF	$75	**$375**
111691	190.8 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
111675	198.1 to 199.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111692	205.8 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
111676	212.6 to 213.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
111693	218.3 to 222.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
111694	222.6 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
111704	230.8 to 260.3 feet	Key Note Segment		5 ft	148			
111695	260.3 to 269.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	48	SF	$40	**$1,900**
111696	269.8 to 274.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
111697	277.2 to 290.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,220**
111677	292.8 to 293.8 feet	**Vertical Change**	3.45"	5 ft	5	SF	$75	**$375**
111698	296.3 to 299.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271611	GARY LN	MADERA AVE	COLOMBARD DR	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111678	299.0 to 300.0 feet	**Vertical Change**	-2.05"	5 ft	5	REF		
111699	321.9 to 328.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
111700	328.8 to 335.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
111679	334.2 to 335.2 feet	**Vertical Change**	3.37"	5 ft	5	REF		
111701	337.4 to 343.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
111702	344.3 to 345.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
111680	344.5 to 345.5 feet	**Vertical Change**	.81"	5 ft	5	REF		
111705	355.6 to 357.7 feet		5.0-6.0%	5 ft	11			
111706	355.6 to 357.7 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **MADERA AVE** **$122,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281405	GARY LN	MADERA AVE	DIAMOND WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112865	0.1 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
112866	15.5 to 25.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
112867	25.8 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	278	SF	$120	**$33,360**
112852	42.8 to 43.8 feet	**Vertical Change**	.61"	5 ft	5	REF		
112868	84.3 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
112853	91.0 to 92.0 feet	**Vertical Change**	.52"	5 ft	5	REF		
112869	93.3 to 118.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
112854	106.1 to 107.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
112870	118.0 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
112871	142.0 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
112872	149.3 to 180.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,480**
112873	180.1 to 184.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
112874	187.1 to 189.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
112875	189.1 to 201.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
112876	201.6 to 203.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
112877	204.2 to 209.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
112878	209.3 to 211.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
112879	212.7 to 222.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
112880	222.5 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
112855	230.8 to 231.8 feet	**Vertical Change**	2.1"	5 ft	5	REF		
112881	239.0 to 242.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
112882	242.5 to 252.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
112883	253.4 to 283.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	**$17,880**
112856	284.1 to 285.1 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
112884	286.8 to 292.1 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	27	SF	$120	**$3,180**
112857	296.8 to 297.8 feet	**Vertical Change**	-.56"	5 ft	5	REF		
112885	297.4 to 315.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
112858	302.1 to 303.1 feet	**Vertical Change**	2.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281405	GARY LN	MADERA AVE	DIAMOND WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112859	309.5 to 310.5 feet	Vertical Change	3.73"	5 ft	5	REF		
112886	318.7 to 352.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	168	SF	$120	**$20,100**
112887	353.1 to 356.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
112888	359.1 to 398.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,520**
112889	399.9 to 412.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
112890	412.7 to 431.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
112860	417.5 to 418.5 feet	Vertical Change	.79"	5 ft	5	REF		
112891	431.4 to 485.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	271	SF	$120	**$32,520**
112892	492.5 to 500.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
112893	504.6 to 527.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	**$13,620**
112861	504.9 to 505.9 feet	Vertical Change	.31"	5 ft	5	REF		
112862	516.8 to 517.8 feet	Vertical Change	.91"	5 ft	5	REF		
112894	528.2 to 532.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
112895	533.7 to 547.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
112896	548.2 to 553.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
112897	556.3 to 580.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
112863	563.2 to 564.2 feet	Vertical Change	.28"	5 ft	5	REF		
112898	580.4 to 602.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,960**
112864	605.0 to 606.0 feet	Vertical Change	.27"	5 ft	5	REF		
112899	605.9 to 663.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	290	SF	$120	**$34,740**
112900	666.5 to 668.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **MADERA AVE** **$361,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201138	GARY LN	MAJESTIC CT	CRYSTAL WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76181	2.3 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,754**
76182	10.3 to 29.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,206**
76183	32.1 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
76184	41.4 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
76185	47.0 to 48.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
76186	48.4 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
76187	56.2 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
76188	82.0 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
76189	86.9 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
76190	91.4 to 96.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,808**
76191	99.0 to 108.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,292**
76192	112.8 to 115.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,512**
76193	116.1 to 125.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,130**
76194	125.6 to 130.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,754**
76195	130.8 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,128**
76196	144.8 to 155.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,724**
76180	156.1 to 157.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **MAJESTIC CT** **$54,067.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201223	GARY LN	MAJESTIC WAY	DIAMOND WAY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76480	0.1 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
76481	2.6 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
76482	26.8 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,980**
76475	48.3 to 49.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
76476	62.2 to 63.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
76483	65.7 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
76484	83.8 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
76477	88.9 to 89.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
76485	92.0 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
76486	107.2 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	237	SF	$120	**$28,500**
76478	116.7 to 117.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
76479	130.4 to 131.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
76487	154.8 to 156.4 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **MAJESTIC WAY** **$83,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281530	GARY LN	MONTEREY DR	CONCORD AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113507	0.0 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
113503	16.5 to 17.5 feet	**Vertical Change**	1.82"	5 ft	5	SF	$75	**$375**
113508	21.0 to 24.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
113509	24.7 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
113504	25.3 to 26.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113510	26.3 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
113505	30.1 to 31.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
113511	34.8 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
113512	59.8 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
113513	72.3 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,020**
113506	101.1 to 102.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
113514	106.8 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
113515	134.9 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
113516	137.3 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
113517	147.3 to 156.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,460**
113518	161.0 to 162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
113519	166.3 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **MONTEREY DR** **$84,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211335	GARY LN	MONTEREY ST	CHATOM WY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79586	0.0 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
79587	13.4 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
79588	18.8 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
79589	72.0 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
79590	84.7 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79591	89.7 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
79592	100.2 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
79593	122.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79594	132.7 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
79595	164.7 to 228.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	321	SF	$120	**$38,520**
79596	232.2 to 243.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
79597	246.3 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
79598	255.8 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79599	266.3 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
79600	276.9 to 282.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
79601	284.8 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
79602	291.4 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
79603	299.4 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
79604	305.7 to 307.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79584	330.8 to 331.8 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
79605	332.6 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
79606	349.8 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
79607	357.2 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	213	SF	$120	**$25,560**
79608	403.0 to 407.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
79609	411.8 to 413.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
79610	422.0 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
79611	441.6 to 464.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
79612	466.8 to 496.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211335	GARY LN	MONTEREY ST	CHATOM WY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79613	502.6 to 514.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
79585	510.0 to 511.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
79614	517.3 to 529.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
79615	542.8 to 545.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **MONTEREY ST** **$187,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281511	GARY LN	SENECA AVE	CONCORD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113337	13.9 to 14.9 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375
113338	16.9 to 17.9 feet	Vertical Change	1.22"	5 ft	5	REF		
113344	16.9 to 34.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	$10,680
113339	21.9 to 22.9 feet	Vertical Change	2.99"	5 ft	5	REF		
113340	32.1 to 33.1 feet	Vertical Change	.44"	5 ft	5	REF		
113341	36.2 to 37.2 feet	Vertical Change	2.67"	5 ft	5	SF	$75	$375
113342	38.4 to 39.4 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
113345	40.0 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
113355	45.3 to 48.4 feet		5.0-6.0%	5 ft	16			
113356	45.3 to 48.4 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	$1,860
113343	45.9 to 46.9 feet	Vertical Change	-.59"	5 ft	5	SF	$75	$375
113346	70.8 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
113347	75.3 to 93.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	$11,160
113348	94.5 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
113349	118.3 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
113350	129.8 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,340
113351	140.8 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
113352	143.8 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
113353	148.1 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
113354	154.3 to 158.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,220

TOTAL COST FOR: N *side of* **GARY LN** *Starting at:* **SENECA AVE** **$52,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281611	GARY LN	SENECA DR	COLOMBARD DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113974	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
113975	2.2 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
113976	19.6 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
113977	31.8 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
113978	48.2 to 62.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
113979	62.2 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
113980	83.8 to 126.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,440**
113968	84.9 to 85.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
113969	89.9 to 90.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
113970	92.4 to 95.5 feet	**Vertical Change**	.46"	5 ft	16	REF		
113971	97.1 to 98.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
113972	100.2 to 101.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113981	128.9 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
113973	141.9 to 142.9 feet	**Vertical Change**	-.45"	5 ft	5	REF		
113982	144.3 to 149.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
113983	150.0 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**

TOTAL COST FOR: S *side of* **GARY LN** *Starting at:* **SENECA DR** **$75,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211327	GARY LN	STADIUM RD	CHATOM WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79536	0.0 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
79537	12.3 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
79538	41.5 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
79539	71.6 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
79540	80.9 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79541	105.3 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79542	109.8 to 113.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
79543	119.0 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
79544	132.9 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
79545	149.6 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79546	163.5 to 164.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
79547	164.7 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79548	200.0 to 207.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
79549	246.9 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
79550	259.5 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
79551	279.9 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
79552	289.9 to 291.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79553	296.2 to 298.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79535	317.0 to 318.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
79554	323.9 to 331.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
79555	342.3 to 343.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79556	349.3 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
79557	360.3 to 361.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79558	368.0 to 371.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
79559	390.3 to 403.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
79560	406.8 to 410.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
79561	414.7 to 417.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
79562	424.7 to 425.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211327	GARY LN	STADIUM RD	CHATOM WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **GARY LN**	*Starting at:* **STADIUM RD**					**$70,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110200956	GATEWAY DR	1200 GATEWAY DR	1200 GATEWAY DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75173	0.9 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
75174	27.4 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
75172	38.7 to 39.7 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **GATEWAY DR** *Starting at:* **1200 GATEWAY DR** **$20,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110200957	GATEWAY DR	1300 GATEWAY DR	1300 GATEWAY DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75175	0.0 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
75176	4.3 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	236	SF	$120	**$28,320**

TOTAL COST FOR: SW *side of* **GATEWAY DR** *Starting at:* **1300 GATEWAY DR** **$30,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75180	0.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
75181	8.4 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
75182	34.7 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
75183	55.5 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75184	58.8 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
75185	67.3 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
75186	82.8 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
75187	89.0 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
75188	101.8 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
75189	109.3 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
75190	111.7 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
75191	118.4 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
75192	132.7 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
75193	141.5 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
75194	145.9 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
75195	172.7 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
75196	180.8 to 188.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
75197	191.0 to 195.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
75198	197.3 to 208.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
75199	210.4 to 213.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
75200	214.7 to 223.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
75201	224.9 to 233.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
75202	235.7 to 256.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,540**
75203	257.3 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
75204	262.3 to 314.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	263	SF	$120	**$31,500**
75301	277.4 to 278.5 feet		5.0-6.0%	5 ft	6			
75205	319.1 to 323.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
75206	325.8 to 338.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75207	339.3 to 345.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
75302	340.6 to 342.3 feet		6.0-7.0%	5 ft	9			
75303	343.3 to 344.4 feet		5.0-6.0%	5 ft	6			
75208	345.7 to 349.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
75209	351.8 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
75210	363.5 to 364.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
75304	363.7 to 368.7 feet		5.0-6.0%	5 ft	25			
75211	365.1 to 390.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
75305	366.6 to 368.7 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
75306	380.3 to 381.4 feet		5.0-6.0%	5 ft	6			
75307	394.3 to 395.4 feet		5.0-6.0%	5 ft	6			
75212	396.3 to 416.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
75213	419.0 to 422.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
75214	428.3 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75215	435.8 to 443.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
75216	461.7 to 464.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
75217	466.2 to 467.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
75218	471.0 to 473.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
75219	474.6 to 489.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
75220	495.8 to 500.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
75308	505.9 to 510.3 feet		5.0-6.0%	5 ft	22			
75221	514.6 to 525.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
75222	527.6 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
75223	534.4 to 553.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
75177	549.3 to 550.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
75224	555.1 to 556.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
75225	559.9 to 566.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
75226	570.9 to 577.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75227	580.8 to 581.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75228	589.3 to 593.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
75229	608.0 to 609.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
75230	611.5 to 612.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
75231	620.0 to 623.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
75232	629.3 to 630.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
75233	632.3 to 636.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
75234	639.8 to 640.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
75235	647.7 to 652.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,580**
75236	652.8 to 655.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
75237	655.6 to 661.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
75238	661.3 to 662.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
75239	665.6 to 673.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
75240	677.5 to 678.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
75241	679.0 to 682.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
75242	682.5 to 686.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
75243	688.0 to 689.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
75244	689.1 to 692.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
75245	695.1 to 714.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	96	SF	$120	**$11,520**
75246	714.3 to 723.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
75247	724.3 to 726.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
75248	727.1 to 762.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	176	SF	$120	**$21,120**
75249	762.3 to 767.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
75250	767.9 to 789.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
75251	789.3 to 798.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
75252	801.7 to 807.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
75253	811.7 to 819.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
75254	844.8 to 850.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75309	866.8 to 869.0 feet		5.0-6.0%	5 ft	11			
75310	866.8 to 869.0 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
75255	868.8 to 876.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
75311	876.9 to 880.0 feet		5.0-6.0%	5 ft	16			
75312	876.9 to 880.0 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
75256	878.8 to 880.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
75257	896.7 to 898.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
75313	898.8 to 901.3 feet		5.0-6.0%	5 ft	13			
75314	906.3 to 908.9 feet		5.0-6.0%	5 ft	13			
75315	906.3 to 908.9 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
75316	913.4 to 916.8 feet		5.0-6.0%	5 ft	17			
75317	913.4 to 919.8 feet	Running Slope	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
75318	917.5 to 924.5 feet	Running Slope	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
75319	920.4 to 928.8 feet	Running Slope	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
75320	925.6 to 928.8 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
75321	931.7 to 937.3 feet		5.0-6.0%	5 ft	28			
75322	933.7 to 937.3 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
75323	940.7 to 946.9 feet		5.0-6.0%	5 ft	31			
75324	940.7 to 946.9 feet	Running Slope	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
75325	949.3 to 950.3 feet		5.0-6.0%	5 ft	5			
75326	950.3 to 953.2 feet		6.0-7.0%	5 ft	15			
75327	958.4 to 960.8 feet		6.0-7.0%	5 ft	12			
75328	958.4 to 964.6 feet	Running Slope	6.0-7.0%	5 ft	31	SF	$120	**$3,720**
75329	962.3 to 964.6 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
75330	966.8 to 969.3 feet		5.0-6.0%	5 ft	13			
75331	966.8 to 969.3 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
75332	971.6 to 977.5 feet		6.0-7.0%	5 ft	30			
75333	973.7 to 981.6 feet	Running Slope	6.0-7.0%	5 ft	40	SF	$120	**$4,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75334	979.5 to 981.6 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
75335	981.6 to 984.3 feet		5.0-6.0%	5 ft	14			
75336	981.6 to 984.3 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
75337	984.8 to 986.5 feet		6.0-7.0%	5 ft	9			
75258	986.8 to 996.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
75338	988.7 to 991.9 feet		6.0-7.0%	5 ft	16			
75339	988.7 to 994.3 feet	Running Slope	6.0-7.0%	5 ft	28	SF	$120	**$3,360**
75340	994.3 to 996.4 feet		5.0-6.0%	5 ft	11			
75341	994.3 to 1000.9 feet	Running Slope	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
75342	997.5 to 1004.0 feet	Running Slope	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
75343	1001.3 to 1004.0 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
75344	1005.3 to 1012.2 feet		6.0-7.0%	5 ft	35			
75345	1005.3 to 1012.2 feet	Running Slope	6.0-7.0%	5 ft	35	SF	$120	**$4,140**
75346	1013.2 to 1018.1 feet		5.0-6.0%	5 ft	25			
75347	1013.2 to 1023.0 feet	Running Slope	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
75259	1017.2 to 1018.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
75348	1018.9 to 1023.0 feet	Running Slope	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
75349	1023.4 to 1026.4 feet		6.0-7.0%	5 ft	15			
75350	1023.4 to 1026.4 feet	Running Slope	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
75260	1025.0 to 1042.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
75351	1026.4 to 1032.2 feet		5.0-6.0%	5 ft	29			
75352	1026.4 to 1032.2 feet	Running Slope	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
75353	1034.8 to 1038.9 feet		5.0-6.0%	5 ft	21			
75354	1034.8 to 1048.3 feet	Running Slope	5.0-6.0%	5 ft	68	SF	$120	**$8,100**
75355	1040.2 to 1053.2 feet	Running Slope	5.0-6.0%	5 ft	65	SF	$120	**$7,800**
75356	1049.4 to 1053.2 feet	Running Slope	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
75357	1053.2 to 1054.8 feet		6.0-7.0%	5 ft	8			
75261	1054.0 to 1060.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75358	1054.8 to 1061.8 feet		5.0-6.0%	5 ft	35			
75359	1057.0 to 1067.7 feet	Running Slope	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
75360	1062.0 to 1067.7 feet	Running Slope	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
75262	1062.9 to 1064.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
75263	1066.8 to 1090.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
75361	1070.3 to 1073.3 feet		5.0-6.0%	5 ft	15			
75362	1070.3 to 1075.2 feet	Running Slope	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
75363	1076.7 to 1077.7 feet		7.0-8.0%	5 ft	5			
75364	1078.3 to 1080.3 feet		9.0-10.0%	5 ft	10			
75264	1092.8 to 1096.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
75265	1099.7 to 1102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
75365	1102.2 to 1107.7 feet		5.0-6.0%	5 ft	28			
75366	1103.8 to 1107.7 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
75266	1106.5 to 1107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75267	1114.2 to 1116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
75367	1114.3 to 1118.2 feet		5.0-6.0%	5 ft	20			
75368	1114.3 to 1118.2 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
75369	1121.2 to 1123.7 feet		5.0-6.0%	5 ft	13			
75370	1121.2 to 1123.7 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
75268	1121.5 to 1153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
75371	1133.0 to 1134.8 feet		5.0-6.0%	5 ft	9			
75269	1162.3 to 1172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
75270	1174.4 to 1203.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,460**
75271	1207.3 to 1220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
75272	1224.2 to 1234.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
75273	1246.5 to 1250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
75274	1255.1 to 1273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
75275	1280.1 to 1283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201007	GATEWAY DR	1300 GATEWAY DR	ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75276	1286.2 to 1290.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
75277	1290.5 to 1305.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
75278	1307.3 to 1316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
75279	1324.9 to 1333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
75280	1336.0 to 1362.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
75281	1365.3 to 1372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
75282	1374.8 to 1404.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
75283	1408.6 to 1434.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
75284	1439.2 to 1453.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
75285	1457.0 to 1464.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
75286	1464.5 to 1473.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
75287	1475.9 to 1487.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
75288	1493.9 to 1494.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75289	1497.2 to 1509.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
75290	1510.0 to 1517.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
75291	1521.9 to 1554.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,740**
75179	1556.6 to 1557.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
75292	1557.8 to 1567.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
75293	1567.5 to 1578.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
75294	1578.2 to 1602.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
75295	1606.9 to 1608.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
75296	1608.7 to 1615.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
75297	1618.5 to 1620.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
75298	1623.6 to 1633.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
75299	1635.4 to 1659.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
75300	1663.6 to 1671.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **1300 GATEWAY DR** **$775,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041016	GATEWAY DR	900 GATEWAY DR	900 GATEWAY DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120982	0.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	269	SF	$120	**$32,280**
120979	5.1 to 6.1 feet	**Vertical Change**	.51"	10 ft	10	REF		
120980	18.0 to 19.0 feet	**Vertical Change**	.44"	10 ft	10	REF		
120983	29.8 to 31.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	**$1,680**
120984	33.9 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	254	SF	$120	**$30,480**
120985	63.0 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	354	SF	$120	**$42,480**
120981	95.5 to 96.5 feet	**Vertical Change**	.41"	10 ft	10	REF		
120986	101.9 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	238	SF	$120	**$28,560**
120987	128.9 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	177	SF	$120	**$21,240**
120988	151.8 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	70	SF	$120	**$8,400**
120989	161.1 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	80	SF	$120	**$9,600**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **900 GATEWAY DR** **$174,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041018	GATEWAY DR	900 GATEWAY DR	900 GATEWAY DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120995	0.0 to 34.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	279	SF	$120	**$33,504**
120996	39.0 to 51.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	103	SF	$120	**$12,384**
120997	53.2 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	159	SF	$120	**$19,104**
120990	61.7 to 62.7 feet	**Vertical Change**	.28"	8 ft	8	REF		
120998	73.1 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	73	SF	$120	**$8,736**
120991	74.6 to 75.6 feet	**Vertical Change**	.26"	8 ft	8	REF		
120999	82.2 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	51	SF	$120	**$6,144**
120992	87.6 to 88.6 feet	**Vertical Change**	.44"	8 ft	8	REF		
121000	93.3 to 101.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	62	SF	$120	**$7,392**
121001	103.9 to 107.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	30	SF	$120	**$3,552**
121002	107.8 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	129	SF	$120	**$15,456**
120993	113.5 to 114.5 feet	**Vertical Change**	-.3"	8 ft	8	REF		
121003	126.3 to 128.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	16	SF	$120	**$1,920**
120994	130.7 to 131.7 feet	**Vertical Change**	.77"	8 ft	8	SF	$75	**$600**
121004	132.2 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,896**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **900 GATEWAY DR** **$113,688.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041009	GATEWAY DR	920 GATEWAY DR	920 GATEWAY DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120955	45.4 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	17	SF	$120	**$2,040**
120956	95.8 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	12	SF	$120	**$1,440**
120949	287.0 to 288.0 feet	**Vertical Change**	-.29"	10 ft	10	REF		
120950	304.3 to 305.3 feet	**Vertical Change**	.28"	10 ft	10	REF		
120951	321.5 to 322.5 feet	**Vertical Change**	-.29"	10 ft	10	LF	$75	**$750**
120952	326.5 to 327.5 feet	**Vertical Change**	-.3"	10 ft	10	LF	$75	**$750**
120953	356.5 to 357.5 feet	**Vertical Change**	-.3"	10 ft	10	LF	$75	**$750**
120954	410.1 to 411.1 feet	**Vertical Change**	.27"	10 ft	10	LF	$75	**$750**
120957	449.5 to 453.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **920 GATEWAY DR** **$10,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041011	GATEWAY DR	920 GATEWAY DR	920 GATEWAY DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120960	25.3 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	71	SF	$120	**$8,520**
120958	30.5 to 31.5 feet	**Vertical Change**	-.3"	10 ft	10	REF		
120961	33.0 to 45.0 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	120	SF	$120	**$14,400**
120962	46.5 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	483	SF	$120	**$57,960**
120959	89.9 to 90.9 feet	**Vertical Change**	2.47"	10 ft	10	REF		
120963	98.2 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	166	SF	$120	**$19,920**
120964	117.1 to 166.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	498	SF	$120	**$59,760**
120965	170.8 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	122	SF	$120	**$14,640**
120966	185.3 to 188.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	35	SF	$120	**$4,200**
120967	192.4 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	**$4,080**
120968	196.3 to 202.3 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	60	SF	$120	**$7,200**
120969	204.6 to 209.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	52	SF	$120	**$6,240**
120970	211.3 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	**$1,680**
120971	214.4 to 217.8 feet		5.0-6.0%	10 ft	34			
120972	214.4 to 217.8 feet	Running Slope	5.0-6.0%	10 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **920 GATEWAY DR** **$202,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041013	GATEWAY DR	920 GATEWAY DR	920 GATEWAY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120973	30.3 to 31.3 feet	Vertical Change	.3"	10 ft	10	LF	$75	$750
120977	229.0 to 230.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	$1,680
120974	244.2 to 245.2 feet	Vertical Change	.5"	10 ft	10	SF	$75	$750
120975	246.9 to 247.9 feet	Vertical Change	-.31"	10 ft	10	LF	$75	$750
120976	252.7 to 253.7 feet	Vertical Change	.43"	10 ft	10	LF	$75	$750
120978	259.2 to 262.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	$4,080

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **920 GATEWAY DR** **$8,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041004	GATEWAY DR	E CLEVELAND AVE	920 GATEWAY DR	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120921	1.1 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	32	SF	$120	**$3,840**
120922	4.3 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	10	SF	$120	**$1,200**
120923	22.5 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	29	SF	$120	**$3,480**
120924	27.9 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	29	SF	$120	**$3,480**
120925	30.8 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	33	SF	$120	**$3,960**
120926	36.6 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	97	SF	$120	**$11,640**
120927	46.7 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	90	SF	$120	**$10,800**
120928	57.8 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	92	SF	$120	**$11,040**
120929	68.0 to 71.2 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	32	SF	$120	**$3,840**
120946	72.3 to 110.9 feet	Key Note Segment		10 ft	386			
120930	112.2 to 122.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	107	SF	$120	**$12,840**
120931	123.3 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	121	SF	$120	**$14,520**
120947	136.8 to 173.0 feet	Key Note Segment		10 ft	362			
120932	176.3 to 181.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	53	SF	$120	**$6,360**
120933	184.3 to 222.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	385	SF	$120	**$46,200**
120934	225.2 to 235.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	106	SF	$120	**$12,720**
120935	238.5 to 247.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	94	SF	$120	**$11,280**
120936	251.8 to 253.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	15	SF	$120	**$1,800**
120937	253.3 to 276.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	232	SF	$120	**$27,840**
120948	280.7 to 316.2 feet	Key Note Segment		10 ft	355			
120938	320.8 to 322.2 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	14	SF	$120	**$1,680**
120908	333.7 to 334.7 feet	**Vertical Change**	.26"	10 ft	10	LF	$75	**$750**
120939	338.3 to 344.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	63	SF	$120	**$7,560**
120940	347.4 to 350.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	26	SF	$120	**$3,120**
120941	352.1 to 356.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	41	SF	$120	**$4,920**
120942	356.7 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	**$1,320**
120943	360.9 to 366.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	54	SF	$120	**$6,480**
120909	450.9 to 451.9 feet	**Vertical Change**	3.25"	10 ft	10	SF	$75	**$750**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041004	GATEWAY DR	E CLEVELAND AVE	920 GATEWAY DR	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120910	475.0 to 476.0 feet	Vertical Change	.33"	10 ft	10	LF	$75	$750
120911	501.0 to 502.0 feet	Vertical Change	.3"	10 ft	10	LF	$75	$750
120912	526.8 to 527.8 feet	Vertical Change	.56"	10 ft	10	SF	$75	$750
120913	604.2 to 605.2 feet	Vertical Change	.26"	10 ft	10	LF	$75	$750
120944	607.4 to 609.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	17	SF	$120	$2,040
120914	630.1 to 631.1 feet	Vertical Change	-.45"	10 ft	10	LF	$75	$750
120915	673.3 to 674.3 feet	Vertical Change	.38"	10 ft	10	LF	$75	$750
120916	698.9 to 699.9 feet	Vertical Change	.31"	10 ft	10	REF		
120945	699.4 to 702.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	29	SF	$120	$3,480
120917	707.6 to 708.6 feet	Vertical Change	.38"	10 ft	10	LF	$75	$750
120918	716.2 to 717.2 feet	Vertical Change	.29"	10 ft	10	LF	$75	$750
120919	750.8 to 751.8 feet	Vertical Change	.31"	10 ft	10	LF	$75	$750
120920	766.7 to 767.7 feet	Vertical Change	.4"	10 ft	10	LF	$75	$750

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **E CLEVELAND AVE** **$226,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110200955	GATEWAY DR	OLIVE AVE	PARKING LOT ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75139	3.1 to 8.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**
75140	8.7 to 10.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
75141	10.9 to 12.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
75134	11.1 to 12.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
75142	12.6 to 17.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
75143	17.5 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
75144	22.4 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75145	29.7 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
75166	35.2 to 72.6 feet	Key Note Segment		5 ft	187			
75135	46.4 to 47.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
75146	73.8 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
75167	81.7 to 115.3 feet	Key Note Segment		5 ft	168			
75147	115.8 to 174.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	293	SF	$120	**$35,160**
75136	154.7 to 155.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
75168	175.8 to 215.3 feet	Key Note Segment		5 ft	198			
75137	213.9 to 214.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
75148	216.2 to 217.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75149	220.8 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
75150	224.5 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
75169	230.1 to 264.8 feet	Key Note Segment		5 ft	174			
75151	264.8 to 265.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
75152	268.2 to 271.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
75138	269.8 to 270.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
75153	272.5 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
75154	275.8 to 281.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
75170	283.8 to 317.0 feet	Key Note Segment		5 ft	166			
75155	318.4 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
75156	337.7 to 350.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110200955	GATEWAY DR	OLIVE AVE	PARKING LOT ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75157	354.0 to 362.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
75158	363.2 to 369.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
75171	370.2 to 406.0 feet	Key Note Segment		5 ft	179			
75159	408.3 to 409.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
75160	411.1 to 414.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
75161	418.8 to 427.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
75162	432.3 to 435.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
75163	440.2 to 446.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
75164	448.5 to 452.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
75165	461.5 to 466.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: SW *side of* **GATEWAY DR** *Starting at:* **OLIVE AVE** **$107,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041026	GATEWAY DR	W CENTRAL AVE	900 GATEWAY DR	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121063	1.6 to 2.6 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
121011	28.7 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
121012	50.8 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
121013	58.7 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
121014	74.8 to 76.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
121015	76.8 to 80.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
121016	80.6 to 83.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
121017	83.3 to 87.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,640**
121018	87.7 to 89.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
121019	89.6 to 92.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
121020	95.7 to 99.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
121021	100.4 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
121022	117.8 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
121023	138.5 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
121024	144.0 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121025	147.3 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
121026	154.4 to 157.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
121027	160.5 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
121028	165.2 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
121029	179.4 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
121030	190.2 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
121031	198.7 to 204.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
121032	217.9 to 219.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
121033	223.9 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
121034	232.7 to 243.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
121035	250.3 to 259.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,460**
121036	267.8 to 291.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
121037	296.3 to 302.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041026	GATEWAY DR	W CENTRAL AVE	900 GATEWAY DR	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121005	306.9 to 307.9 feet	Vertical Change	-.27"	5 ft	5	REF		
121038	307.1 to 309.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
121039	327.7 to 329.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
121040	338.9 to 340.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
121041	357.3 to 362.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
121042	364.5 to 387.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	$13,920
121043	409.1 to 413.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
121006	412.8 to 413.8 feet	Vertical Change	-.78"	5 ft	5	REF		
121044	415.8 to 417.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
121045	421.4 to 423.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
121046	432.1 to 451.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,460
121047	481.8 to 485.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
121048	505.8 to 518.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,740
121049	519.3 to 520.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
121050	523.7 to 524.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$660
121051	528.0 to 535.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
121052	535.4 to 538.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
121053	546.6 to 555.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
121007	557.6 to 558.6 feet	Vertical Change	2.69"	5 ft	5	REF		
121054	558.1 to 574.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$10,020
121008	574.2 to 575.2 feet	Vertical Change	.28"	5 ft	5	REF		
121055	577.1 to 581.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
121009	580.0 to 581.0 feet	Vertical Change	.28"	5 ft	5	REF		
121056	591.2 to 592.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
121010	593.8 to 594.8 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
121057	597.1 to 604.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
121058	607.8 to 616.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
121059	630.7 to 636.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041026	GATEWAY DR	W CENTRAL AVE	900 GATEWAY DR	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121060	641.8 to 669.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
121061	676.5 to 695.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
121062	695.0 to 708.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**

TOTAL COST FOR: W *side of* **GATEWAY DR** *Starting at:* **W CENTRAL AVE** **$222,354.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201348	GEORGIA AVE	1051 GEORGIA AVE	LIME AVE	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105556	0.5 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
105554	2.6 to 3.6 feet	**Vertical Change**	1.72"	5 ft	5	REF		
105555	10.7 to 11.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **GEORGIA AVE** *Starting at:* **1051 GEORGIA AVE** **$5,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201347	GEORGIA AVE	1083 GEORGIA AVE	1051 GEORGIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105539	1.0 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
105526	4.6 to 8.0 feet	**Vertical Change**	-.28"	5 ft	17	REF		
105540	8.0 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
105549	11.0 to 29.9 feet	Key Note Segment		5 ft	95			
105527	11.6 to 12.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
105528	21.1 to 22.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
105529	30.5 to 31.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
105550	37.4 to 58.3 feet	Key Note Segment		5 ft	105			
105530	37.7 to 38.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
105531	46.3 to 47.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
105541	59.5 to 68.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
105542	68.6 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
105532	77.7 to 78.7 feet	**Vertical Change**	-.81"	5 ft	5	REF		
105533	81.6 to 84.7 feet	**Vertical Change**	.38"	5 ft	16	REF		
105543	89.8 to 99.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
105544	99.9 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
105551	103.5 to 123.1 feet	Key Note Segment		5 ft	98			
105534	104.6 to 105.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
105535	123.2 to 124.2 feet	**Vertical Change**	-.58"	5 ft	5	REF		
105545	124.6 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
105552	131.5 to 150.4 feet	Key Note Segment		5 ft	95			
105536	132.3 to 133.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
105546	152.2 to 161.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
105547	161.0 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
105553	178.2 to 198.7 feet	Key Note Segment		5 ft	103			
105537	189.1 to 190.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
105538	198.5 to 199.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
105548	199.5 to 200.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201347	GEORGIA AVE	1083 GEORGIA AVE	1051 GEORGIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE		*side of* **GEORGIA AVE**	*Starting at:* **1083 GEORGIA AVE**					**$46,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201225	GEORGIA AVE	GRAPEFRUIT WAY	LIME AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105178	0.1 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
105179	10.3 to 17.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
105186	18.6 to 38.3 feet	Key Note Segment		5 ft	98			
105173	19.0 to 20.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
105174	26.2 to 27.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
105175	38.3 to 39.3 feet	**Vertical Change**	-.67"	5 ft	5	REF		
105180	39.9 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
105181	45.3 to 59.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
105176	58.5 to 59.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
105182	59.4 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
105187	76.4 to 96.0 feet	Key Note Segment		5 ft	98			
105183	102.5 to 109.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
105188	110.4 to 132.6 feet	Key Note Segment		5 ft	111			
105184	134.7 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
105177	143.6 to 144.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
105185	149.3 to 154.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: SW *side of* **GEORGIA AVE** *Starting at:* **GRAPEFRUIT WAY** **$45,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201229	GEORGIA AVE	LIME AVE	TANGERINE AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105210	0.0 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
105229	13.7 to 34.0 feet	Key Note Segment		5 ft	102			
105189	14.5 to 15.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
105190	33.8 to 34.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
105211	35.6 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105212	38.9 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
105230	40.6 to 61.4 feet	Key Note Segment		5 ft	104			
105191	61.1 to 62.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
105213	63.0 to 85.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
105192	85.3 to 86.3 feet	**Vertical Change**	.56"	5 ft	5	REF		
105214	85.7 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
105215	94.0 to 108.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
105231	108.9 to 128.2 feet	Key Note Segment		5 ft	96			
105193	119.8 to 120.8 feet	**Vertical Change**	1.37"	5 ft	5	REF		
105216	129.5 to 133.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
105232	134.4 to 156.7 feet	Key Note Segment		5 ft	111			
105194	134.7 to 135.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
105195	156.1 to 157.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
105217	157.5 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
105218	163.9 to 172.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
105219	172.2 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
105196	177.9 to 178.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
105220	184.4 to 203.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
105197	194.3 to 195.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
105233	203.1 to 223.6 feet	Key Note Segment		5 ft	103			
105198	204.2 to 205.2 feet	**Vertical Change**	.61"	5 ft	5	REF		
105199	213.8 to 214.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
105200	223.5 to 224.5 feet	**Vertical Change**	-.48"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201229	GEORGIA AVE	LIME AVE	TANGERINE AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105221	224.9 to 230.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
105234	231.0 to 250.7 feet	Key Note Segment		5 ft	99			
105201	241.4 to 242.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105202	250.9 to 251.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
105222	252.3 to 281.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	148	SF	$120	**$17,760**
105203	257.7 to 258.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
105223	281.9 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
105235	298.3 to 317.9 feet	Key Note Segment		5 ft	98			
105204	299.2 to 300.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
105224	323.4 to 325.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
105236	325.6 to 349.7 feet	Key Note Segment		5 ft	120			
105205	326.5 to 327.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
105206	344.0 to 345.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
105207	350.4 to 351.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105225	351.3 to 353.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
105226	353.9 to 362.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
105227	362.9 to 383.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
105208	378.4 to 379.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
105228	383.8 to 384.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105209	389.9 to 390.9 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **GEORGIA AVE** *Starting at:* **LIME AVE** **$112,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201300	GEORGIA AVE	LIME AVE	LEMON AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105389	0.0 to 8.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
105383	5.2 to 6.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
105384	7.2 to 8.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105390	11.5 to 38.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,140**
105391	38.4 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
105392	60.8 to 64.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
105385	61.8 to 62.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105393	66.2 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
105386	74.1 to 75.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
105394	75.9 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,940**
105395	100.8 to 134.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	169	SF	$120	**$20,220**
105387	123.4 to 124.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
105396	135.4 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
105388	145.7 to 146.7 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **GEORGIA AVE** *Starting at:* **LIME AVE** **$82,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201222	GEORGIA AVE	TANGERINE AVE	GRAPEFRUIT WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105145	1.3 to 2.3 feet	Vertical Change	.36"	5 ft	5	REF		
105155	2.3 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
105146	7.4 to 8.4 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
105156	8.8 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,500
105157	11.3 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
105158	17.3 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
105170	19.2 to 20.2 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
105159	25.2 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,260
105171	27.4 to 28.4 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
105160	41.4 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
105148	42.3 to 43.3 feet	Vertical Change	.29"	5 ft	5	REF		
105167	53.3 to 73.0 feet	Key Note Segment		5 ft	99			
105149	63.9 to 64.9 feet	Vertical Change	.37"	5 ft	5	REF		
105150	66.5 to 67.5 feet	Vertical Change	.76"	5 ft	5	REF		
105172	73.0 to 74.3 feet		5.0-6.0%	5 ft	7			
105161	74.5 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
105162	80.3 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
105163	93.7 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
105168	101.0 to 120.0 feet	Key Note Segment		5 ft	95			
105151	120.6 to 121.6 feet	Vertical Change	.33"	5 ft	5	REF		
105164	121.6 to 122.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
105165	123.7 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
105169	128.7 to 147.3 feet	Key Note Segment		5 ft	93			
105152	139.0 to 140.0 feet	Vertical Change	-.28"	5 ft	5	REF		
105153	148.3 to 149.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
105166	149.8 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,640
105154	164.5 to 165.5 feet	Vertical Change	.97"	5 ft	5	SF	$75	$375

TOTAL COST FOR: SW *side of* **GEORGIA AVE** *Starting at:* **TANGERINE AVE** **$49,743.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201141	GEORGIA CT	936 GEORGIA CT	VALENCIA AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104887	0.3 to 18.6 feet	Key Note Segment		5 ft	92			
104871	5.2 to 6.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
104872	11.6 to 12.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
104882	19.7 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
104873	21.5 to 22.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
104883	32.8 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
104888	36.8 to 57.3 feet	Key Note Segment		5 ft	103			
104874	53.2 to 54.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
104884	62.4 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
104889	68.3 to 91.7 feet	Key Note Segment		5 ft	117			
104875	69.1 to 70.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
104876	76.4 to 77.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
104877	83.1 to 84.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
104878	92.3 to 93.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
104879	98.0 to 99.0 feet	**Vertical Change**	.51"	5 ft	5	REF		
104885	98.8 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
104880	103.5 to 104.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
104886	115.1 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
104881	117.9 to 118.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **GEORGIA CT** *Starting at:* **936 GEORGIA CT** **$20,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201139	GEORGIA CT	VALENCIA AVE	936 GEORGIA CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104860	3.1 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
104861	24.2 to 32.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
104862	35.0 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
104857	42.8 to 43.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104863	43.0 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
104864	48.3 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
104865	70.8 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
104858	73.7 to 74.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
104866	81.8 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
104867	88.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
104868	92.3 to 98.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
104870	98.3 to 117.5 feet	Key Note Segment		5 ft	96			
104859	100.9 to 101.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
104869	117.6 to 118.9 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	7	SF	$40	**$260**

TOTAL COST FOR: NE *side of* **GEORGIA CT** *Starting at:* **VALENCIA AVE** **$43,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211600	GILL AVE	NOBLE ST	PINE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106517	1.2 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
106518	7.8 to 13.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
106519	13.0 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
106500	27.0 to 28.0 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
106520	41.3 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
106501	56.5 to 57.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
106521	64.8 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
106522	76.7 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
106552	81.3 to 104.1 feet	Key Note Segment		5 ft	114			
106523	105.1 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
106553	117.5 to 141.1 feet	Key Note Segment		5 ft	118			
106524	142.6 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
106525	157.8 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
106526	164.6 to 166.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
106527	168.0 to 229.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	309	SF	$120	**$37,020**
106502	185.5 to 186.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
106503	203.9 to 204.9 feet	**Vertical Change**	-.59"	5 ft	5	REF		
106504	206.0 to 207.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
106505	219.8 to 220.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
106506	228.7 to 229.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
106507	232.0 to 233.0 feet	**Vertical Change**	-.78"	5 ft	5	SF	$75	**$375**
106508	233.9 to 234.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
106528	236.6 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
106529	252.2 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
106530	268.8 to 276.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
106531	278.5 to 281.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
106532	284.7 to 301.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
106533	306.0 to 323.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211600	GILL AVE	NOBLE ST	PINE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106509	312.7 to 313.7 feet	Vertical Change	.37"	5 ft	5	REF		
106554	324.3 to 353.9 feet	Key Note Segment		5 ft	148			
106534	358.8 to 364.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
106535	368.4 to 382.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
106536	384.1 to 385.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106537	387.5 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
106538	407.5 to 422.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
106510	424.6 to 425.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
106511	432.9 to 433.9 feet	Vertical Change	.26"	5 ft	5	REF		
106539	433.1 to 439.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
106512	438.3 to 439.3 feet	Vertical Change	.3"	5 ft	5	REF		
106540	440.7 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
106541	461.0 to 504.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,160**
106542	506.8 to 515.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,100**
106543	516.4 to 549.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
106513	524.8 to 525.8 feet	Vertical Change	-.34"	5 ft	5	REF		
106514	542.5 to 543.5 feet	Vertical Change	-.29"	5 ft	5	REF		
106544	552.6 to 554.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
106545	555.0 to 562.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
106546	565.1 to 574.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
106547	574.4 to 575.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106548	577.7 to 579.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106515	587.5 to 588.5 feet	Vertical Change	.54"	5 ft	5	SF	$75	**$375**
106549	588.8 to 607.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
106555	607.5 to 638.4 feet	Key Note Segment		5 ft	155			
106550	638.4 to 640.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	12	SF	$40	**$460**
106551	642.1 to 666.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
106516	655.5 to 656.5 feet	Vertical Change	-.46"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211600	GILL AVE	NOBLE ST	PINE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **GILL AVE**	*Starting at:* **NOBLE ST**					**$247,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150904	GLADE AVE	ASHBURY CT	HILLSBORO AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66960	0.4 to 4.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
66961	5.0 to 6.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
66962	6.9 to 10.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
66963	11.4 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
66964	17.3 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
67015	30.4 to 63.7 feet	Key Note Segment		5 ft	167			
66937	63.8 to 64.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
66965	65.5 to 66.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
66966	69.9 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
67016	75.6 to 104.4 feet	Key Note Segment		5 ft	144			
66967	104.8 to 105.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	5	SF	$120	**$600**
66938	107.5 to 108.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
66968	108.9 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
66969	117.2 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
66970	135.7 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66971	144.1 to 168.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
66972	172.8 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
67017	179.1 to 209.0 feet	Key Note Segment		5 ft	150			
66939	179.7 to 183.4 feet	**Vertical Change**	.31"	5 ft	19	REF		
66973	212.6 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
66974	226.1 to 230.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
66975	232.3 to 239.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
66976	240.9 to 248.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
66940	243.4 to 244.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
67018	248.3 to 275.0 feet	Key Note Segment		5 ft	134			
66977	281.9 to 284.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66941	287.1 to 288.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
67019	295.9 to 328.6 feet	Key Note Segment		5 ft	164			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150904	GLADE AVE	ASHBURY CT	HILLSBORO AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66942	303.0 to 304.0 feet	Vertical Change	.3"	5 ft	5	REF		
66943	310.8 to 311.8 feet	Vertical Change	.36"	5 ft	5	REF		
66978	336.4 to 355.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
66979	357.3 to 358.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66980	362.4 to 366.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
66981	367.4 to 368.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
66982	374.4 to 392.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
66983	394.1 to 397.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
66984	399.9 to 401.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
67020	402.5 to 431.3 feet	Key Note Segment		5 ft	144			
66985	432.9 to 434.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
66986	436.5 to 441.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
66987	443.8 to 458.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
66944	460.4 to 461.4 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
67021	460.8 to 495.5 feet	Key Note Segment		5 ft	174			
66988	498.8 to 501.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
67022	504.8 to 537.8 feet	Key Note Segment		5 ft	165			
66945	536.0 to 537.0 feet	Vertical Change	.3"	5 ft	5	REF		
66946	538.7 to 539.7 feet	Vertical Change	-.38"	5 ft	5	LF	$75	**$375**
66989	539.9 to 554.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
66947	542.3 to 543.3 feet	Vertical Change	.55"	5 ft	5	REF		
66990	555.5 to 561.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
66991	564.7 to 567.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
66992	570.3 to 574.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
67023	578.0 to 602.8 feet	Key Note Segment		5 ft	124			
66948	594.9 to 595.9 feet	Vertical Change	.46"	5 ft	5	REF		
66949	604.4 to 605.4 feet	Vertical Change	-.52"	5 ft	5	SF	$75	**$375**
66993	605.5 to 646.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	204	SF	$120	**$24,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150904	GLADE AVE	ASHBURY CT	HILLSBORO AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66950	645.8 to 646.8 feet	Vertical Change	.27"	5 ft	5	REF		
66994	646.5 to 649.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
66995	651.6 to 652.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
66996	656.5 to 659.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
66997	661.7 to 664.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
66998	673.1 to 674.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
67024	675.8 to 712.3 feet	Key Note Segment		5 ft	183			
66999	716.1 to 717.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
67025	725.2 to 750.3 feet	Key Note Segment		5 ft	126			
66951	739.8 to 740.8 feet	Vertical Change	.38"	5 ft	5	REF		
67000	750.5 to 751.7 feet	Cross Slope (Driveway)	8.0-9.0%	5 ft	6	SF	$40	$240
67001	753.7 to 761.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,920
67002	763.8 to 766.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
67003	769.9 to 786.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	$10,140
66952	778.8 to 779.8 feet	Vertical Change	-.28"	5 ft	5	REF		
66953	784.6 to 785.6 feet	Vertical Change	1.39"	5 ft	5	REF		
67004	791.4 to 808.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	$9,960
67005	809.1 to 815.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
67026	815.4 to 842.3 feet	Key Note Segment		5 ft	135			
66954	828.3 to 829.3 feet	Vertical Change	.31"	5 ft	5	REF		
67006	846.0 to 848.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
67027	855.9 to 883.3 feet	Key Note Segment		5 ft	137			
66955	885.7 to 886.7 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
67007	887.3 to 888.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
67008	892.4 to 893.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
67009	896.4 to 905.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,280
67010	906.2 to 925.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,460
66956	906.9 to 907.9 feet	Vertical Change	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150904	GLADE AVE	ASHBURY CT	HILLSBORO AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66957	921.6 to 922.6 feet	Vertical Change	-.32"	5 ft	5	REF		
67028	928.8 to 957.5 feet	Key Note Segment		5 ft	144			
66958	932.8 to 933.8 feet	Vertical Change	.29"	5 ft	5	REF		
67011	957.8 to 958.8 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	5	SF	$40	**$200**
67012	959.7 to 967.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
67013	967.1 to 969.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
67014	971.9 to 985.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
66959	972.8 to 973.8 feet	Vertical Change	.34"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **GLADE AVE** *Starting at:* **ASHBURY CT** **$224,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150854	GLADE AVE	EXPRESS CT	W CLEVELAND AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66880	4.8 to 18.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
66881	19.9 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
66882	49.9 to 55.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
66883	63.1 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
66884	75.2 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
66885	86.8 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
66886	92.4 to 104.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
66887	104.0 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
66925	106.3 to 136.4 feet	Key Note Segment		5 ft	151			
66872	109.1 to 110.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
66873	126.2 to 127.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
66888	140.1 to 163.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
66889	163.4 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
66890	191.1 to 201.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
66891	203.9 to 208.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
66892	210.6 to 217.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
66893	221.2 to 225.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
66894	230.0 to 235.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
66895	236.6 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
66926	255.8 to 291.9 feet	Key Note Segment		5 ft	180			
66875	274.0 to 275.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
66896	292.4 to 296.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	20	SF	$40	**$780**
66897	301.9 to 315.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	**$8,340**
66898	319.4 to 323.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
66899	324.8 to 334.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
66900	337.6 to 348.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
66901	348.6 to 355.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
66902	357.3 to 371.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150854	GLADE AVE	EXPRESS CT	W CLEVELAND AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66903	372.4 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
66876	389.9 to 390.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
66904	398.9 to 420.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
66877	406.0 to 407.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
66905	422.3 to 431.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
66906	434.8 to 447.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
66907	448.0 to 461.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
66908	463.1 to 474.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
66878	463.7 to 464.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
66909	474.0 to 488.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	74	SF	$120	**$8,880**
66910	491.3 to 494.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
66911	497.2 to 498.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
66912	502.1 to 506.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
66913	509.3 to 514.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
66879	513.5 to 514.5 feet	**Vertical Change**	2.17"	5 ft	5	REF		
66914	515.3 to 516.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
66915	519.7 to 529.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
66916	533.0 to 534.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
66917	536.2 to 562.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
66918	562.4 to 577.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
66919	578.9 to 586.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
66920	588.7 to 594.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
66921	594.3 to 606.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
66922	608.5 to 613.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
66923	613.0 to 614.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
66924	621.4 to 622.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **GLADE AVE** *Starting at:* **EXPRESS CT** **$258,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150907	GLADE AVE	HILLSBORO AVE	STEVEN LANE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67031	1.4 to 9.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	42	SF	$120	**$5,040**
67032	9.8 to 14.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,060**
67033	14.9 to 26.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
67034	28.8 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
67029	28.9 to 29.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
67041	38.5 to 57.3 feet	Key Note Segment		5 ft	94			
67035	58.8 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
67042	60.7 to 78.7 feet	Key Note Segment		5 ft	90			
67036	83.3 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
67037	89.2 to 107.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
67038	108.0 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
67030	110.4 to 111.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
67039	141.4 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
67040	148.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **GLADE AVE** *Starting at:* **HILLSBORO AVE** **$59,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109150847	GLADE AVE	MARIE DR	EXPRESS CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66755	0.0 to 16.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
66756	17.4 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
66820	22.8 to 43.7 feet	Key Note Segment		5 ft	105			
66757	44.8 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
66821	73.2 to 101.4 feet	Key Note Segment		5 ft	141			
66758	109.0 to 120.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
66759	120.6 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
66822	128.8 to 150.1 feet	Key Note Segment		5 ft	106			
66760	154.6 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
66761	168.4 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
66823	171.3 to 194.9 feet	Key Note Segment		5 ft	118			
66726	176.3 to 177.3 feet	**Vertical Change**	3.5"	5 ft	5	REF		
66727	178.4 to 179.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66762	197.9 to 216.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
66728	200.5 to 201.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
66763	219.8 to 221.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
66824	221.8 to 241.2 feet	Key Note Segment		5 ft	97			
66729	240.7 to 241.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
66764	243.1 to 262.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
66765	264.9 to 268.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
66766	268.8 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
66825	280.3 to 300.3 feet	Key Note Segment		5 ft	100			
66767	301.8 to 307.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
66768	307.0 to 330.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
66769	332.8 to 336.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
66826	336.4 to 354.2 feet	Key Note Segment		5 ft	89			
66730	356.3 to 357.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
66770	357.9 to 358.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109150847	GLADE AVE	MARIE DR	EXPRESS CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66771	361.8 to 365.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
66772	365.5 to 370.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
66773	377.9 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
66827	392.0 to 412.7 feet	Key Note Segment		5 ft	104			
66731	403.6 to 404.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
66774	414.6 to 444.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
66775	446.6 to 447.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
66828	447.8 to 468.3 feet	Key Note Segment		5 ft	103			
66733	468.6 to 469.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
66776	471.1 to 474.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
66829	474.1 to 493.8 feet	Key Note Segment		5 ft	99			
66734	475.0 to 476.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66735	477.6 to 478.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
66736	494.3 to 495.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
66777	503.7 to 516.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
66778	521.8 to 523.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
66830	528.2 to 547.8 feet	Key Note Segment		5 ft	98			
66737	534.1 to 535.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66738	549.5 to 550.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
66779	553.3 to 557.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
66780	559.2 to 563.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
66781	566.4 to 571.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
66782	575.8 to 580.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
66783	581.3 to 614.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
66831	615.1 to 633.3 feet	Key Note Segment		5 ft	91			
66784	633.3 to 634.4 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	6	SF	$40	**$220**
66785	635.6 to 637.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
66786	642.1 to 656.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109150847	GLADE AVE	MARIE DR	EXPRESS CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66787	657.4 to 664.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
66832	664.6 to 692.7 feet	Key Note Segment		5 ft	141			
66739	666.3 to 667.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
66740	694.3 to 695.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
66788	694.3 to 702.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
66789	706.3 to 715.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
66790	718.2 to 720.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
66741	718.4 to 719.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
66791	724.8 to 726.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
66833	727.5 to 754.4 feet	Key Note Segment		5 ft	135			
66792	756.4 to 770.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
66793	773.4 to 821.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	239	SF	$120	**$28,620**
66742	789.7 to 790.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
66743	813.3 to 814.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66834	823.1 to 851.8 feet	Key Note Segment		5 ft	144			
66794	853.3 to 854.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
66795	855.1 to 869.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
66835	870.3 to 905.8 feet	Key Note Segment		5 ft	178			
66744	889.7 to 890.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
66745	904.3 to 907.8 feet	**Vertical Change**	-.36"	5 ft	18	REF		
66796	907.3 to 913.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
66797	914.8 to 921.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
66798	924.6 to 926.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
66799	930.3 to 933.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
66746	931.8 to 932.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
66800	936.0 to 940.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
66801	943.8 to 944.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
66802	945.9 to 953.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109150847	GLADE AVE	MARIE DR	EXPRESS CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66803	956.9 to 967.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
66804	969.3 to 975.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
66836	975.7 to 1006.8 feet	Key Note Segment		5 ft	156			
66805	1010.8 to 1014.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
66806	1014.5 to 1018.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
66807	1018.4 to 1022.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
66748	1023.1 to 1024.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
66808	1026.3 to 1037.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
66749	1027.4 to 1028.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
66809	1037.0 to 1039.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
66810	1041.8 to 1045.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
66750	1042.7 to 1043.7 feet	**Vertical Change**	.59"	5 ft	5	REF		
66811	1045.8 to 1061.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
66812	1065.0 to 1070.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
66751	1067.8 to 1068.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
66813	1071.9 to 1076.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
66814	1078.4 to 1082.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
66752	1080.3 to 1081.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
66815	1083.5 to 1131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	238	SF	$120	**$28,560**
66753	1118.2 to 1119.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
66816	1136.3 to 1140.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
66817	1142.5 to 1144.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
66754	1144.5 to 1145.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
66818	1146.5 to 1165.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
66837	1168.2 to 1169.6 feet		6.0-7.0%	5 ft	7			
66819	1168.8 to 1170.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: NE *side of* **GLADE AVE** *Starting at:* **MARIE DR** **$353,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150910	GLADE AVE	STEVEN LANE	MARIE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67054	0.0 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
67055	3.8 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
67056	21.8 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
67079	26.4 to 46.2 feet	Key Note Segment		5 ft	99			
67043	31.0 to 32.0 feet	**Vertical Change**	2.08"	5 ft	5	REF		
67057	48.9 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
67080	51.0 to 70.6 feet	Key Note Segment		5 ft	98			
67044	54.7 to 55.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
67045	69.0 to 70.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
67058	72.8 to 76.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
67059	80.6 to 99.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
67060	103.1 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67061	106.7 to 111.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
67081	111.7 to 140.4 feet	Key Note Segment		5 ft	144			
67046	121.7 to 122.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
67062	148.7 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
67082	171.2 to 190.7 feet	Key Note Segment		5 ft	98			
67048	189.3 to 190.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
67063	193.3 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
67064	209.8 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
67065	222.0 to 226.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
67066	226.5 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67050	232.4 to 235.2 feet	**Vertical Change**	.35"	5 ft	14	LF	$75	**$1,050**
67083	233.3 to 260.9 feet	Key Note Segment		5 ft	138			
67051	261.5 to 262.5 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
67067	263.6 to 296.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,560**
67068	296.2 to 307.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
67069	310.4 to 323.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150910	GLADE AVE	STEVEN LANE	MARIE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67070	324.2 to 325.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
67071	326.7 to 331.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	25	SF	$120	**$2,940**
67072	332.3 to 371.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	194	SF	$120	**$23,220**
67084	371.0 to 398.1 feet	Key Note Segment		5 ft	136			
67073	401.0 to 402.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
67074	404.1 to 424.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
67075	426.9 to 443.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
67076	446.8 to 448.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67077	465.8 to 468.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
67078	471.5 to 473.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
67053	471.8 to 472.8 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **GLADE AVE** *Starting at:* **STEVEN LANE** **$150,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150856	GLADE AVE	W CLEVELAND AVE	ASHBURY CT	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66930	0.2 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
66927	3.2 to 4.2 feet	**Vertical Change**	2.19"	5 ft	5	REF		
66931	15.3 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
66928	45.9 to 46.9 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
66932	47.8 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
66933	66.8 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
66934	75.0 to 76.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
66935	75.0 to 77.8 feet		5.0-6.0%	5 ft	14			
66936	75.0 to 77.8 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
66929	75.8 to 76.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **GLADE AVE** *Starting at:* **W CLEVELAND AVE** **$34,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271150	GLENVILLE AVE	1685 GLENVILLE AVE	ASHBURY CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111001	0.0 to 1.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
111002	3.8 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
110990	22.7 to 23.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
111016	34.5 to 65.7 feet	Key Note Segment		5 ft	156			
110991	65.3 to 66.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
111003	66.8 to 72.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
110992	74.4 to 75.4 feet	**Vertical Change**	-.56"	5 ft	5	REF		
111004	75.0 to 92.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
111005	93.1 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
111017	103.3 to 132.0 feet	Key Note Segment		5 ft	144			
111006	134.0 to 140.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
111007	140.9 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
110993	141.7 to 142.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
111008	147.5 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
111009	151.5 to 159.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
111010	160.5 to 202.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	212	SF	$120	**$25,440**
110994	163.4 to 164.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
111011	202.9 to 205.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
111018	207.4 to 239.3 feet	Key Note Segment		5 ft	160			
110995	239.8 to 240.8 feet	**Vertical Change**	.56"	5 ft	5	REF		
111012	240.6 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
110996	248.3 to 249.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
111013	249.9 to 251.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
110997	251.2 to 252.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
111019	251.8 to 288.3 feet	Key Note Segment		5 ft	183			
110998	254.3 to 255.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
110999	278.6 to 279.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
111014	288.5 to 289.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271150	GLENVILLE AVE	1685 GLENVILLE AVE	ASHBURY CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111015	295.8 to 315.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
111000	314.2 to 315.2 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GLENVILLE AVE** *Starting at:* **1685 GLENVILLE AVE** **$92,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S	2201271057	GLENVILLE AVE	ARIES CT	HILLSBORO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110518	2.8 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
110519	31.8 to 42.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
110520	42.5 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
110521	50.9 to 58.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
110522	60.8 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
110523	66.6 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
110556	70.5 to 100.3 feet	Key Note Segment		5 ft	149			
110492	73.8 to 74.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
110524	104.5 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
110493	122.2 to 123.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
110525	129.2 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
110526	138.0 to 139.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
110527	139.8 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
110557	146.8 to 174.8 feet	Key Note Segment		5 ft	140			
110494	173.4 to 174.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
110528	176.2 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
110495	187.4 to 188.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
110529	190.8 to 202.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
110496	204.6 to 205.6 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
110530	206.8 to 212.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
110558	212.6 to 240.8 feet	Key Note Segment		5 ft	141			
110497	215.8 to 216.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
110498	239.2 to 240.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
110531	243.3 to 245.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
110532	247.8 to 252.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
110533	253.6 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
110534	258.3 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110535	264.9 to 273.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S	2201271057	GLENVILLE AVE	ARIES CT	HILLSBORO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110499	272.7 to 273.7 feet	Vertical Change	.27"	5 ft	5	REF		
110536	273.3 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
110559	280.2 to 308.6 feet	Key Note Segment		5 ft	142			
110537	310.7 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
110538	313.6 to 330.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,380
110539	335.5 to 336.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
110540	341.7 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
110541	346.8 to 363.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	$10,260
110501	347.2 to 348.2 feet	Vertical Change	.32"	5 ft	5	REF		
110542	363.9 to 365.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
110560	367.7 to 396.3 feet	Key Note Segment		5 ft	143			
110502	394.8 to 395.8 feet	Vertical Change	3.23"	5 ft	5	REF		
110543	397.6 to 413.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	$9,420
110544	415.7 to 433.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	$10,620
110561	434.0 to 473.9 feet	Key Note Segment		5 ft	200			
110503	434.1 to 437.6 feet	Vertical Change	.26"	5 ft	18	REF		
110504	452.5 to 453.5 feet	Vertical Change	.56"	5 ft	5	REF		
110505	461.6 to 462.6 feet	Vertical Change	.4"	5 ft	5	REF		
110506	472.0 to 473.0 feet	Vertical Change	.4"	5 ft	5	REF		
110545	475.5 to 480.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
110546	480.8 to 489.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
110507	486.7 to 487.7 feet	Vertical Change	.3"	5 ft	5	REF		
110547	489.8 to 505.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	$9,300
110548	508.3 to 522.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	$8,340
110508	512.5 to 513.5 feet	Vertical Change	.37"	5 ft	5	REF		
110549	522.3 to 530.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
110509	525.2 to 526.2 feet	Vertical Change	.36"	5 ft	5	REF		
110550	531.2 to 559.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	$16,920

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S	2201271057	GLENVILLE AVE	ARIES CT	HILLSBORO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110562	562.6 to 589.6 feet	Key Note Segment		5 ft	135			
110510	566.1 to 567.1 feet	Vertical Change	-.26"	5 ft	5	REF		
110511	573.0 to 574.0 feet	Vertical Change	-.27"	5 ft	5	REF		
110512	587.9 to 588.9 feet	Vertical Change	.36"	5 ft	5	REF		
110551	594.5 to 601.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
110552	602.3 to 605.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
110513	603.2 to 604.2 feet	Vertical Change	3.51"	5 ft	5	REF		
110553	605.6 to 629.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
110563	631.5 to 658.3 feet	Key Note Segment		5 ft	134			
110515	631.8 to 632.8 feet	Vertical Change	.49"	5 ft	5	REF		
110516	647.8 to 648.8 feet	Vertical Change	-.42"	5 ft	5	REF		
110554	660.1 to 662.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
110555	676.3 to 679.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: W/S *side of* **GLENVILLE AVE** *Starting at:* **ARIES CT** **$207,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271030	GLENVILLE AVE	ASHBURY CT	COMMON WAY	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110322	0.1 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,780**
110323	21.3 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
110318	23.4 to 24.4 feet	**Vertical Change**	1.26"	5 ft	5	REF		
110324	45.3 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
110319	50.2 to 51.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
110325	62.9 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	260	SF	$120	**$31,140**
110320	79.9 to 80.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
110326	114.8 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
110327	123.3 to 159.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,960**
110321	127.4 to 128.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **GLENVILLE AVE** *Starting at:* **ASHBURY CT** **$90,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271039	GLENVILLE AVE	COMMON WAY	FORUM WAY	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110375	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
110376	9.7 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
110369	9.9 to 10.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
110370	22.6 to 23.6 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
110377	24.2 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
110378	37.4 to 92.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	276	SF	$120	**$33,120**
110372	73.5 to 74.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
110379	93.3 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
110373	97.6 to 98.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
110380	113.3 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
110381	116.7 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
110382	129.3 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
110383	136.4 to 138.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
110384	138.7 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
110385	148.3 to 153.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
110386	154.9 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
110374	158.3 to 159.3 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **GLENVILLE AVE** *Starting at:* **COMMON WAY** **$75,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271046	GLENVILLE AVE	FORUM WAY	ARIES CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110433	0.1 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**
110434	35.1 to 36.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
110435	36.7 to 38.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$780**
110436	38.2 to 58.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	101	SF	$120	**$12,180**
110437	59.5 to 70.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	55	SF	$120	**$6,660**
110438	72.0 to 80.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
110439	84.1 to 114.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$17,940**
110432	106.3 to 107.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
110440	115.1 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
110441	120.3 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
110442	130.8 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**

TOTAL COST FOR: W *side of* **GLENVILLE AVE** *Starting at:* **FORUM WAY** **$82,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/E	2201271147	GLENVILLE AVE	HILLSBORO AVE	1685 GLENVILLE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110926	0.0 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
110927	4.8 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
110928	10.6 to 13.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
110929	16.5 to 29.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
110977	29.4 to 58.7 feet	Key Note Segment		5 ft	147			
110881	32.3 to 33.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
110882	58.2 to 59.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
110930	64.2 to 77.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
110931	80.8 to 84.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
110932	85.3 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
110883	100.1 to 101.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
110978	100.1 to 128.1 feet	Key Note Segment		5 ft	140			
110884	119.0 to 120.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
110933	129.6 to 130.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
110934	130.7 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
110935	136.7 to 139.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
110885	137.8 to 138.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
110979	140.1 to 168.8 feet	Key Note Segment		5 ft	144			
110886	150.4 to 151.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
110887	158.7 to 159.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
110936	170.7 to 172.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
110937	172.1 to 178.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
110938	186.2 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
110939	201.3 to 241.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$23,940**
110888	215.1 to 216.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
110889	227.9 to 228.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
110940	242.6 to 250.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
110941	253.9 to 259.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/E	2201271147	GLENVILLE AVE	HILLSBORO AVE	1685 GLENVILLE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110942	261.3 to 279.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
110890	266.3 to 267.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
110891	278.7 to 279.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
110943	280.7 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
110980	282.8 to 321.2 feet	Key Note Segment		5 ft	192			
110892	283.5 to 287.1 feet	**Vertical Change**	.29"	5 ft	18	REF		
110893	309.6 to 310.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
110894	318.8 to 321.8 feet	**Vertical Change**	.34"	5 ft	15	REF		
110944	322.4 to 327.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
110945	328.4 to 339.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
110946	339.6 to 346.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
110947	347.1 to 373.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
110895	354.3 to 355.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
110896	379.3 to 380.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
110948	383.2 to 385.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
110981	385.3 to 416.6 feet	Key Note Segment		5 ft	157			
110897	385.9 to 389.6 feet	**Vertical Change**	.41"	5 ft	19	REF		
110898	408.3 to 409.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
110949	418.3 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
110899	418.8 to 419.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
110950	433.5 to 441.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
110951	441.9 to 447.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
110952	451.0 to 485.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	172	SF	$120	**$20,640**
110900	455.0 to 456.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
110982	485.7 to 515.0 feet	Key Note Segment		5 ft	147			
110901	488.8 to 489.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
110902	498.4 to 499.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
110903	512.7 to 513.7 feet	**Vertical Change**	.57"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/E	2201271147	GLENVILLE AVE	HILLSBORO AVE	1685 GLENVILLE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110989	515.0 to 516.7 feet		5.0-6.0%	5 ft	9			
110953	518.8 to 537.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
110904	519.5 to 520.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
110954	537.3 to 564.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
110905	543.4 to 544.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110906	556.9 to 557.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110983	564.7 to 594.2 feet	Key Note Segment		5 ft	148			
110907	565.5 to 566.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
110908	574.9 to 575.9 feet	**Vertical Change**	-.61"	5 ft	5	REF		
110909	594.7 to 595.7 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
110955	595.8 to 601.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
110956	601.0 to 617.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
110910	607.5 to 608.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
110957	617.4 to 630.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
110911	628.7 to 629.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
110958	633.8 to 638.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110984	639.8 to 670.2 feet	Key Note Segment		5 ft	152			
110912	641.5 to 642.5 feet	**Vertical Change**	1.23"	5 ft	5	REF		
110959	670.6 to 673.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
110960	674.4 to 683.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
110913	684.6 to 685.6 feet	**Vertical Change**	1.8"	5 ft	5	SF	$75	**$375**
110961	687.8 to 715.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,620**
110985	716.7 to 743.5 feet	Key Note Segment		5 ft	134			
110914	717.1 to 718.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
110916	735.0 to 736.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
110917	741.7 to 742.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
110962	746.1 to 747.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
110918	746.2 to 747.2 feet	**Vertical Change**	-.42"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/E	2201271147	GLENVILLE AVE	HILLSBORO AVE	1685 GLENVILLE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110963	749.5 to 760.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
110964	763.1 to 783.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
110919	764.5 to 765.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110986	783.6 to 819.7 feet	Key Note Segment		5 ft	181			
110920	784.1 to 785.1 feet	**Vertical Change**	.44"	5 ft	5	REF		
110965	821.6 to 830.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
110921	832.8 to 833.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
110966	833.0 to 854.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
110967	858.6 to 861.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
110968	861.9 to 871.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
110969	871.4 to 875.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
110970	875.8 to 877.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
110987	878.8 to 909.6 feet	Key Note Segment		5 ft	154			
110922	896.3 to 897.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
110971	911.0 to 916.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
110972	917.3 to 925.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
110973	925.4 to 957.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
110923	930.2 to 931.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
110974	960.9 to 962.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
110988	962.3 to 988.8 feet	Key Note Segment		5 ft	133			
110924	980.7 to 981.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
110925	989.4 to 990.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
110975	989.7 to 990.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
110976	991.2 to 992.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N/E *side of* **GLENVILLE AVE** *Starting at:* **HILLSBORO AVE** **$313,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111503	GOLDEN STATE BLVD	AVE 17	3455 GOLDEN STATE BLVD	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133798	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
133799	4.3 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
133796	5.8 to 6.8 feet	**Vertical Change**	-.47"	5 ft	5	REF		
133800	6.3 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
133801	10.4 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
133802	23.0 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
133803	29.0 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
133804	33.1 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
133797	44.3 to 45.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
133805	47.5 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
133806	54.1 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
133807	59.9 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
133808	84.3 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
133809	113.2 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
133810	119.5 to 123.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
133811	128.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: E *side of* **GOLDEN STATE BLVD** *Starting at:* **AVE 17** **$46,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201503	GOOSECROSS DR	1181 GOOSECROSS DR	ST. MONTELENA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77088	1.2 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
77089	4.3 to 10.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	29	SF	$120	**$3,480**
77090	10.1 to 15.2 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	26	SF	$120	**$3,060**
77091	20.4 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
77092	28.0 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
77093	48.0 to 52.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
77094	53.3 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
77117	79.3 to 101.0 feet	Key Note Segment		5 ft	109			
77095	101.4 to 104.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
77118	105.2 to 127.3 feet	Key Note Segment		5 ft	111			
77096	127.3 to 132.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	28	SF	$40	**$1,100**
77097	135.3 to 164.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	148	SF	$120	**$17,760**
77098	167.4 to 171.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
77099	173.6 to 175.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
77100	177.5 to 180.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
77119	181.5 to 204.2 feet	Key Note Segment		5 ft	114			
77080	196.8 to 197.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
77101	204.6 to 207.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
77120	207.9 to 230.2 feet	Key Note Segment		5 ft	112			
77102	230.8 to 231.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
77103	233.4 to 244.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
77104	244.5 to 281.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	184	SF	$120	**$22,080**
77081	268.2 to 269.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
77105	284.2 to 286.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
77121	286.0 to 307.8 feet	Key Note Segment		5 ft	109			
77082	293.4 to 294.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
77083	301.7 to 302.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
77106	308.9 to 311.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201503	GOOSECROSS DR	1181 GOOSECROSS DR	ST. MONTELENA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77122	312.1 to 334.8 feet	Key Note Segment		5 ft	113			
77107	334.9 to 340.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	27	SF	$40	**$1,060**
77108	343.2 to 381.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	191	SF	$120	**$22,860**
77109	384.1 to 390.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
77123	390.1 to 411.5 feet	Key Note Segment		5 ft	107			
77110	413.5 to 415.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
77124	415.0 to 437.1 feet	Key Note Segment		5 ft	111			
77111	437.8 to 483.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	228	SF	$120	**$27,300**
77084	439.0 to 440.0 feet	Vertical Change	.51"	5 ft	5	REF		
77112	486.4 to 493.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
77125	493.8 to 514.7 feet	Key Note Segment		5 ft	105			
77113	515.8 to 518.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
77126	518.6 to 541.6 feet	Key Note Segment		5 ft	115			
77114	541.9 to 546.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	**$900**
77085	545.9 to 546.9 feet	Vertical Change	2.55"	5 ft	5	REF		
77115	546.4 to 550.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
77086	550.3 to 551.3 feet	Vertical Change	3.18"	5 ft	5	REF		
77116	558.9 to 565.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
77087	565.8 to 566.8 feet	Vertical Change	.33"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GOOSECROSS DR** *Starting at:* **1181 GOOSECROSS DR** **$166,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201459	GOOSECROSS DR	1197 GOOSECROSS DR	1189 GOOSECROSS DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77078	1.9 to 22.7 feet	Key Note Segment		5 ft	104			
77071	15.5 to 16.5 feet	Vertical Change	.41"	5 ft	5	REF		
77075	23.4 to 26.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	**$580**
77072	23.9 to 24.9 feet	Vertical Change	-.36"	5 ft	5	REF		
77076	62.7 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
77079	67.8 to 87.0 feet	Key Note Segment		5 ft	96			
77073	75.8 to 76.8 feet	Vertical Change	.39"	5 ft	5	REF		
77074	81.9 to 82.9 feet	Vertical Change	-.27"	5 ft	5	REF		
77077	87.0 to 88.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$300**

TOTAL COST FOR: E *side of* **GOOSECROSS DR** *Starting at:* **1197 GOOSECROSS DR** **$3,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201426	GOOSECROSS DR	887 GOOSECROSS DR	QUADY LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76771	0.1 to 1.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
76781	1.8 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
76772	7.1 to 8.1 feet	Vertical Change	.35"	5 ft	5	REF		
76782	11.4 to 21.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,820
76773	14.7 to 15.7 feet	Vertical Change	.4"	5 ft	5	REF		
76783	22.0 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
76774	24.5 to 25.5 feet	Vertical Change	.43"	5 ft	5	REF		
76784	27.8 to 31.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
76785	33.3 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
76775	39.0 to 40.0 feet	Vertical Change	-.36"	5 ft	5	REF		
76786	42.3 to 44.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500
76777	45.9 to 46.9 feet	Vertical Change	.28"	5 ft	5	REF		
76787	46.5 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
76788	50.6 to 73.0 feet	Key Note Segment		5 ft	112			
76778	51.8 to 52.8 feet	Vertical Change	.26"	5 ft	5	REF		
76779	58.9 to 59.9 feet	Vertical Change	-.39"	5 ft	5	REF		
76780	66.3 to 67.3 feet	Vertical Change	-.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GOOSECROSS DR** *Starting at:* **887 GOOSECROSS DR** **$23,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201603	GOOSECROSS DR	QUADY LN	ST. MONTELENA DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77732	1.5 to 6.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
77733	11.0 to 16.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
77734	16.1 to 17.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
77735	17.6 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
77736	21.9 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
77737	29.8 to 34.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,700**
77738	36.8 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
77739	56.8 to 68.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,960**
77729	67.8 to 68.8 feet	**Vertical Change**	.45"	5 ft	5	REF		
77740	76.4 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
77730	77.1 to 78.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
77741	81.8 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
77742	123.6 to 130.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
77743	133.8 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
77744	144.6 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
77731	151.2 to 152.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **GOOSECROSS DR** *Starting at:* **QUADY LN** **$75,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201510	GOOSECROSS DR	ST JULIEN DR	FICKLIN DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77155	0.8 to 27.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,200**
77156	30.1 to 51.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
77165	52.3 to 72.0 feet	Key Note Segment		5 ft	99			
77157	72.8 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
77158	119.4 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
77153	127.1 to 128.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
77159	130.3 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
77160	134.8 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
77154	144.5 to 145.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
77161	145.4 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
77162	153.6 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
77163	159.3 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
77164	167.8 to 170.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **GOOSECROSS DR** *Starting at:* **ST JULIEN DR** **$62,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201507	GOOSECROSS DR	ST. MICHELLE DR	ST JULIEN DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77143	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
77144	12.8 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
77145	19.8 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
77146	27.5 to 34.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
77140	43.1 to 44.1 feet	**Vertical Change**	1.08"	5 ft	5	REF		
77147	43.6 to 45.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
77148	48.5 to 69.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,480**
77141	51.3 to 52.3 feet	**Vertical Change**	.86"	5 ft	5	REF		
77149	70.0 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
77150	77.9 to 102.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,880**
77151	104.9 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	212	SF	$120	**$25,440**
77142	148.2 to 149.2 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
77152	153.8 to 155.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**

TOTAL COST FOR: W *side of* **GOOSECROSS DR** *Starting at:* **ST. MICHELLE DR** **$73,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201425	GOOSECROSS DR	ST. MONTELENA DR	887 GOOSECROSS DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76762	0.0 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
76763	5.2 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
76764	16.6 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76759	16.9 to 17.9 feet	**Vertical Change**	.48"	5 ft	5	REF		
76768	20.7 to 43.3 feet	Key Note Segment		5 ft	113			
76765	43.8 to 54.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
76766	55.4 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
76767	62.6 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
76769	72.5 to 95.8 feet	Key Note Segment		5 ft	117			
76770	99.0 to 121.2 feet	Key Note Segment		5 ft	111			
76760	112.1 to 113.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
76761	120.3 to 121.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GOOSECROSS DR** *Starting at:* **ST. MONTELENA DR** **$24,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201505	GOOSECROSS DR	ST. MONTELENA DR	ST. MICHELLE DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77131	0.0 to 5.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,360**
77132	6.8 to 10.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
77133	11.7 to 14.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
77134	17.1 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,380**
77135	35.1 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
77136	41.9 to 44.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
77137	48.8 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	353	SF	$120	**$42,300**
77127	60.2 to 61.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
77128	98.9 to 99.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
77138	122.8 to 124.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
77129	125.0 to 126.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
77139	126.3 to 141.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
77130	141.7 to 142.7 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **GOOSECROSS DR** *Starting at:* **ST. MONTELENA DR** **$74,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111013	GRANADA DR	102190 S GRANADA DR	GRANADA DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90274	0.9 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
90275	15.8 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
90276	29.5 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
90277	37.1 to 43.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
90278	43.2 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
90279	53.3 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90280	58.1 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90281	61.4 to 71.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
90272	69.3 to 70.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
90282	74.6 to 84.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
90283	84.2 to 85.2 feet		5.0-6.0%	5 ft	5			
90273	85.2 to 86.2 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **102190 S GRANADA DR** **$31,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221038	GRANADA DR	1152 HAZELNUT DR	HAZELNUT DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80964	0.1 to 10.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
80965	13.5 to 17.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
80966	21.2 to 22.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
80967	29.8 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
80968	39.3 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
80969	50.8 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
80963	54.6 to 55.6 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **GRANADA DR** *Starting at:* **1152 HAZELNUT DR** **$30,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111016	GRANADA DR	188 S GRANADA DR	GRANADA DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90290	5.0 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
90291	10.0 to 18.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: S *side of* **GRANADA DR** *Starting at:* **188 S GRANADA DR** **$7,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111018	GRANADA DR	188 S GRANADA DR	PLUMAS ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90293	5.3 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
90294	13.3 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
90295	17.4 to 22.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
90292	41.3 to 42.3 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
90296	51.5 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
90297	63.8 to 67.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
90298	70.8 to 77.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
90299	76.3 to 79.3 feet		5.0-6.0%	5 ft	15			
90300	76.3 to 79.3 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **188 S GRANADA DR** **$22,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110220950	GRANADA DR	2592 MITCHELL CT	MITCHELL CT	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80503	2.0 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80504	7.4 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80505	16.3 to 21.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
80506	24.2 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
80499	36.5 to 37.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
80507	39.8 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
80508	54.7 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
80500	69.9 to 70.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
80501	76.6 to 77.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
80509	82.2 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
80510	93.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
80511	98.3 to 101.9 feet		5.0-6.0%	5 ft	18			
80512	99.6 to 101.9 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
80502	100.4 to 101.4 feet	**Vertical Change**	.39"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GRANADA DR** *Starting at:* **2592 MITCHELL CT** **$38,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221020	GRANADA DR	ALMOND AVE	700 GRANADA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80740	0.8 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
80741	10.5 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
80742	14.8 to 19.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
80743	20.3 to 22.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
80726	20.8 to 21.8 feet	**Vertical Change**	-.5"	5 ft	5	REF		
80744	23.8 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
80745	35.0 to 46.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
80746	47.3 to 48.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
80747	48.4 to 57.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
80748	58.8 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
80749	80.3 to 81.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
80750	84.3 to 90.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
80751	93.8 to 100.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
80752	100.4 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
80753	119.4 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
80727	132.6 to 133.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
80728	141.1 to 142.1 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
80754	150.8 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
80755	154.8 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
80756	160.6 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
80757	176.7 to 182.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
80758	183.3 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
80759	205.1 to 228.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
80760	231.3 to 232.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
80761	232.8 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
80762	235.8 to 247.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
80729	264.5 to 268.3 feet	**Vertical Change**	.26"	5 ft	19	LF	$75	**$1,425**
80763	275.7 to 278.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221020	GRANADA DR	ALMOND AVE	700 GRANADA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80730	281.8 to 282.8 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
80764	284.9 to 286.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
80765	289.6 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,900
80731	306.3 to 307.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
80766	308.3 to 316.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,800
80767	316.5 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
80768	322.8 to 332.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
80769	334.9 to 336.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
80770	336.6 to 338.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
80771	340.9 to 342.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
80772	356.2 to 359.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
80773	360.3 to 361.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
80732	370.3 to 371.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
80805	384.7 to 404.4 feet	Key Note Segment		5 ft	99			
80774	404.4 to 418.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	68	SF	$40	$2,720
80775	418.0 to 422.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
80776	432.6 to 436.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
80777	437.3 to 439.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
80778	442.6 to 462.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	$11,820
80779	462.3 to 477.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
80780	478.5 to 491.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	$7,800
80781	494.7 to 504.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,580
80782	505.3 to 507.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
80783	511.1 to 532.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,720
80784	542.4 to 544.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
80785	548.6 to 554.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
80786	557.2 to 570.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	$7,680
80787	574.3 to 578.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221020	GRANADA DR	ALMOND AVE	700 GRANADA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80733	575.8 to 576.8 feet	Vertical Change	.39"	5 ft	5	REF		
80788	581.4 to 583.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
80789	585.0 to 586.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
80790	589.2 to 590.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
80791	597.4 to 600.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
80734	600.4 to 601.4 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$375**
80792	604.8 to 609.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80793	614.3 to 622.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
80735	626.5 to 627.5 feet	Vertical Change	-.79"	5 ft	5	SF	$75	**$375**
80736	631.0 to 632.0 feet	Vertical Change	.79"	5 ft	5	SF	$75	**$375**
80737	632.9 to 633.9 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$375**
80738	636.1 to 637.1 feet	Vertical Change	1.34"	5 ft	5	SF	$75	**$375**
80794	640.0 to 641.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80795	646.8 to 667.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
80796	667.3 to 688.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
80739	684.3 to 685.3 feet	Vertical Change	.28"	5 ft	5	REF		
80797	688.8 to 723.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
80798	728.8 to 731.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
80799	742.8 to 749.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
80800	757.6 to 763.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
80801	768.3 to 772.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
80802	773.5 to 777.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
80803	778.1 to 786.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
80804	787.4 to 796.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: N *side of* **GRANADA DR** *Starting at:* **ALMOND AVE** **$297,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221002	GRANADA DR	ALMOND AVE	APPLE TREE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80546	0.0 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
80547	6.6 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
80519	7.3 to 8.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
80520	14.5 to 15.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
80548	20.6 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
80521	23.8 to 24.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
80549	26.3 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
80550	37.7 to 41.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
80551	42.4 to 45.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
80552	47.7 to 61.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
80522	66.7 to 67.7 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
80553	69.3 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
80554	73.0 to 74.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
80555	75.9 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
80556	79.1 to 121.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	212	SF	$120	**$25,440**
80524	107.3 to 108.3 feet	**Vertical Change**	1.45"	5 ft	5	REF		
80525	120.3 to 121.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
80557	126.9 to 130.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
80526	129.8 to 132.6 feet	**Vertical Change**	.3"	5 ft	14	REF		
80558	131.3 to 132.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
80527	135.1 to 136.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
80559	136.7 to 137.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
80528	142.1 to 143.1 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
80560	144.1 to 173.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	**$17,520**
80529	151.7 to 152.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
80530	161.6 to 162.6 feet	**Vertical Change**	.66"	5 ft	5	REF		
80561	177.7 to 179.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
80562	181.5 to 182.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221002	GRANADA DR	ALMOND AVE	APPLE TREE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80563	184.6 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
80564	194.3 to 195.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
80565	207.0 to 208.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
80531	209.8 to 210.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
80566	209.9 to 210.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
80567	213.3 to 217.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
80568	217.8 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
80569	221.6 to 225.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
80570	231.8 to 234.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
80571	237.9 to 241.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
80572	255.1 to 256.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
80573	268.3 to 269.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
80574	271.7 to 276.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
80575	289.5 to 290.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
80576	290.8 to 298.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
80577	300.4 to 309.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
80533	312.2 to 313.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
80578	316.0 to 317.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
80579	322.8 to 324.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
80580	325.1 to 332.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
80535	333.8 to 334.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
80581	336.7 to 339.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
80582	342.7 to 355.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
80536	354.8 to 355.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
80583	357.8 to 360.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
80537	358.2 to 359.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
80538	362.4 to 365.8 feet	**Vertical Change**	.37"	5 ft	17	LF	$75	**$1,275**
80584	370.8 to 371.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221002	GRANADA DR	ALMOND AVE	APPLE TREE DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80539	372.4 to 373.4 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
80585	374.0 to 389.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
80586	390.1 to 391.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
80540	397.0 to 398.0 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
80587	403.1 to 417.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	$8,460
80541	403.2 to 404.2 feet	Vertical Change	.3"	5 ft	5	REF		
80542	405.4 to 406.4 feet	Vertical Change	.58"	5 ft	5	REF		
80588	417.8 to 419.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
80544	417.9 to 418.9 feet	Vertical Change	.67"	5 ft	5	REF		
80589	425.6 to 437.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,320
80590	442.9 to 446.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
80591	446.4 to 448.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
80545	451.8 to 452.8 feet	Vertical Change	.31"	5 ft	5	REF		
80592	452.3 to 461.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
80593	463.9 to 479.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
80594	479.2 to 480.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
80595	483.9 to 485.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
80596	489.6 to 490.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
80597	501.3 to 505.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **ALMOND AVE** **$186,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110220945	GRANADA DR	APPLE TREE DR	CHERRY TREE DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80461	0.5 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
80462	10.0 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
80463	17.0 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
80464	33.6 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
80465	40.8 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
80466	43.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
80452	57.0 to 58.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
80467	60.6 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
80453	65.0 to 66.0 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
80468	67.7 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
80469	89.3 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
80470	108.3 to 113.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
80454	110.1 to 111.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
80471	113.4 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
80472	118.4 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
80455	118.5 to 119.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
80473	136.0 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
80474	145.2 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
80475	157.4 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
80476	164.2 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80456	185.4 to 186.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
80477	185.6 to 187.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
80478	188.9 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
80457	198.4 to 199.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
80479	215.9 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
80480	234.4 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
80481	254.3 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
80482	262.3 to 265.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110220945	GRANADA DR	APPLE TREE DR	CHERRY TREE DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80483	268.2 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
80484	284.9 to 286.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
80485	289.1 to 295.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
80458	295.9 to 296.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
80486	302.4 to 304.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80487	308.1 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
80459	308.7 to 309.7 feet	**Vertical Change**	1.32"	5 ft	5	REF		
80460	318.6 to 319.6 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
80488	335.3 to 338.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
80489	343.1 to 344.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **APPLE TREE DR** **$100,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110220947	GRANADA DR	CHERRY TREE DR	2600 CHERRY TREE DR	23

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80491	3.4 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
80492	17.3 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
80493	25.8 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80494	29.8 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80495	38.7 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
80496	54.2 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
80497	66.5 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
80498	74.3 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **CHERRY TREE DR** **$30,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111028	GRANADA DR	DESERT RANCH WAY	MERLOT AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90375	0.0 to 5.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
90376	7.4 to 10.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
90377	10.7 to 20.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
90378	22.8 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
90379	25.6 to 28.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
90380	29.5 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
90381	37.2 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
90382	43.7 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
90361	48.2 to 49.2 feet	**Vertical Change**	1.12"	5 ft	5	REF		
90383	48.4 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,420**
90362	70.3 to 71.3 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
90384	75.8 to 91.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
90385	91.6 to 95.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
90386	95.3 to 98.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
90387	98.3 to 99.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
90388	99.7 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90363	105.3 to 106.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
90389	108.5 to 116.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
90390	118.9 to 120.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
90364	123.8 to 124.8 feet	**Vertical Change**	-2.51"	5 ft	5	SF	$75	**$375**
90391	126.8 to 131.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
90365	129.9 to 130.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
90392	133.4 to 135.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
90393	138.8 to 139.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
90366	139.7 to 140.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
90367	142.2 to 143.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
90394	142.8 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
90368	146.8 to 147.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111028	GRANADA DR	DESERT RANCH WAY	MERLOT AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90369	149.9 to 150.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
90395	152.8 to 158.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,120
90370	154.7 to 155.7 feet	Vertical Change	.38"	5 ft	5	REF		
90396	159.4 to 175.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,900
90397	179.0 to 182.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
90398	186.0 to 192.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
90399	195.3 to 205.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	$5,880
90371	197.4 to 198.4 feet	Vertical Change	.62"	5 ft	5	REF		
90400	205.4 to 219.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	$8,520
90401	220.2 to 229.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	$5,460
90402	229.8 to 231.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
90403	231.4 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
90404	235.6 to 255.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	$11,820
90405	255.3 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
90406	259.3 to 279.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	$11,880
90407	279.6 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
90408	283.0 to 285.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
90409	288.3 to 290.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
90410	307.2 to 310.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
90411	329.4 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
90412	342.3 to 357.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060
90413	364.1 to 373.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
90414	373.8 to 376.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
90372	374.7 to 375.7 feet	Vertical Change	-.45"	5 ft	5	REF		
90415	379.2 to 397.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	$10,860
90416	400.1 to 420.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	$11,940
90417	420.0 to 421.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$960
90418	423.8 to 432.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	$5,220

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111028	GRANADA DR	DESERT RANCH WAY	MERLOT AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90419	432.8 to 441.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
90420	441.3 to 445.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
90373	445.0 to 446.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
90421	445.5 to 448.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
90422	448.9 to 450.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
90423	456.8 to 459.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
90424	460.9 to 474.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
90374	470.9 to 471.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
90425	476.2 to 490.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
90426	490.8 to 504.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
90427	506.7 to 529.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,860**
90428	532.3 to 546.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
90429	546.1 to 568.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
90430	573.8 to 576.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **DESERT RANCH WAY** **$253,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111200	GRANADA DR	MERLOT AVE	W ALMOND AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91636	0.0 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
91637	1.5 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
91638	12.1 to 16.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
91639	20.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91640	24.2 to 25.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
91641	28.8 to 41.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
91642	46.5 to 67.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
91643	67.5 to 70.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
91644	73.7 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
91645	81.6 to 92.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
91646	94.6 to 96.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
91647	100.0 to 101.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
91648	105.5 to 118.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
91649	123.5 to 125.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
91650	129.3 to 131.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
91651	132.3 to 160.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	139	SF	$120	**$16,740**
91652	161.1 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91653	162.1 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
91654	169.5 to 174.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
91655	175.4 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91656	179.4 to 180.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91657	181.4 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
91658	191.2 to 193.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
91659	196.9 to 216.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
91660	219.4 to 236.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
91661	238.4 to 241.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
91662	244.5 to 273.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
91626	263.4 to 264.4 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111200	GRANADA DR	MERLOT AVE	W ALMOND AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91663	281.2 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
91664	287.0 to 292.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
91665	296.1 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91666	299.8 to 300.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
91667	304.3 to 308.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
91668	308.8 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
91669	313.7 to 317.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
91670	319.5 to 320.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
91683	321.5 to 350.8 feet	Key Note Segment		5 ft	147			
91627	338.7 to 339.7 feet	**Vertical Change**	.64"	5 ft	5	REF		
91671	356.9 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
91672	363.8 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
91628	365.9 to 366.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
91673	370.0 to 387.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
91629	382.3 to 383.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
91674	389.6 to 394.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
91675	396.3 to 397.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91676	399.8 to 405.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
91630	408.1 to 409.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
91677	410.4 to 417.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
91678	419.9 to 432.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
91631	420.3 to 421.3 feet	**Vertical Change**	3.03"	5 ft	5	REF		
91679	437.8 to 450.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
91632	439.1 to 440.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
91633	449.3 to 450.3 feet	**Vertical Change**	3"	5 ft	5	REF		
91680	456.3 to 490.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	171	SF	$120	**$20,520**
91634	459.3 to 460.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
91635	486.5 to 487.5 feet	**Vertical Change**	.85"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111200	GRANADA DR	MERLOT AVE	W ALMOND AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91681	493.0 to 504.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
91682	510.0 to 519.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,580**

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **MERLOT AVE** **$214,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111009	GRANADA DR	PARK LN	PARK LN	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90220	1.2 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
90200	3.7 to 4.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
90221	18.3 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
90222	39.0 to 43.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
90223	43.7 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
90224	54.2 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
90201	57.7 to 58.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
90225	79.3 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
90202	81.2 to 82.2 feet	**Vertical Change**	-.38"	5 ft	5	REF		
90269	81.8 to 104.8 feet	Key Note Segment		5 ft	115			
90203	93.6 to 94.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
90226	105.9 to 120.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,640**
90204	112.2 to 113.2 feet	**Vertical Change**	3.56"	5 ft	5	REF		
90227	120.3 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
90228	132.8 to 139.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
90229	162.1 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90230	171.1 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
90205	172.2 to 173.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
90231	185.9 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
90206	207.7 to 208.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
90232	217.6 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
90233	226.5 to 227.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
90234	227.8 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90235	231.8 to 244.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
90207	243.3 to 244.3 feet	**Vertical Change**	.84"	5 ft	5	REF		
90236	245.1 to 246.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90237	253.7 to 256.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
90238	256.2 to 260.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111009	GRANADA DR	PARK LN	PARK LN	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90239	260.1 to 274.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,820**
90208	272.0 to 273.0 feet	**Vertical Change**	1.11"	5 ft	5	REF		
90240	278.0 to 283.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
90241	283.2 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
90242	296.3 to 309.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
90243	316.4 to 320.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
90244	322.9 to 331.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
90271	328.7 to 329.7 feet		5.0-6.0%	5 ft	5			
90245	354.1 to 359.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
90246	360.8 to 364.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
90270	367.0 to 389.1 feet	Key Note Segment		5 ft	111			
90247	393.4 to 395.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
90248	401.0 to 408.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
90249	408.7 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
90250	419.6 to 422.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
90251	422.8 to 424.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
90252	425.2 to 436.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
90253	437.3 to 441.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
90254	456.5 to 462.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
90210	460.6 to 461.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
90255	462.3 to 473.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
90211	463.0 to 464.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
90212	469.5 to 470.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
90256	475.3 to 476.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
90213	476.6 to 477.6 feet	**Vertical Change**	-.42"	5 ft	5	REF		
90257	477.3 to 480.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
90258	480.3 to 486.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	31	SF	$120	**$3,660**
90214	482.4 to 485.4 feet	**Vertical Change**	.31"	5 ft	15	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111009	GRANADA DR	PARK LN	PARK LN	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90215	487.9 to 494.3 feet	Vertical Change	-.36"	5 ft	32	LF	$75	**$2,400**
90259	489.5 to 493.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
90260	494.6 to 497.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
90261	497.2 to 500.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
90216	500.8 to 501.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
90262	504.2 to 505.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
90217	507.6 to 510.7 feet	Vertical Change	-.29"	5 ft	16	REF		
90263	508.2 to 509.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$960**
90264	512.1 to 516.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	20	SF	$120	**$2,340**
90265	516.2 to 519.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,980**
90218	520.5 to 521.5 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
90266	522.4 to 526.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,340**
90267	526.6 to 534.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
90219	527.4 to 533.2 feet	Vertical Change	.43"	5 ft	29	REF		
90268	535.0 to 541.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**

TOTAL COST FOR: E *side of* **GRANADA DR** *Starting at:* **PARK LN** **$193,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111023	GRANADA DR	PLUMAS ST	DESERT RANCH WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90318	0.0 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
90319	16.7 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
90320	19.8 to 22.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
90301	24.2 to 25.2 feet	**Vertical Change**	1.83"	5 ft	5	SF	$75	**$375**
90302	26.0 to 27.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
90321	27.7 to 28.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
90322	29.8 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
90323	40.8 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
90324	62.4 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
90325	98.5 to 102.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
90326	103.5 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
90304	116.9 to 117.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
90305	122.1 to 123.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
90327	139.0 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
90306	142.9 to 147.7 feet	**Vertical Change**	.41"	5 ft	24	REF		
90328	144.8 to 151.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
90307	148.7 to 149.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
90308	150.7 to 151.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
90309	152.5 to 160.8 feet	**Vertical Change**	.28"	5 ft	42	REF		
90329	153.2 to 160.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	36	SF	$120	**$4,260**
90310	166.1 to 167.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
90330	168.2 to 173.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
90331	176.5 to 178.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
90332	182.1 to 183.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
90333	183.8 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
90311	184.5 to 185.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
90334	187.8 to 191.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
90335	191.3 to 193.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111023	GRANADA DR	PLUMAS ST	DESERT RANCH WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90312	197.0 to 198.0 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
90336	201.7 to 203.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
90337	204.6 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
90338	211.1 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
90357	224.2 to 226.4 feet		6.0-7.0%	5 ft	11			
90358	224.2 to 226.4 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	$1,320
90339	226.6 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
90340	240.3 to 244.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,220
90313	240.8 to 241.8 feet	Vertical Change	1.11"	5 ft	5	REF		
90341	244.0 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
90314	245.1 to 246.1 feet	Vertical Change	2.34"	5 ft	5	REF		
90315	260.1 to 261.1 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
90342	261.2 to 262.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$720
90343	264.7 to 267.9 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	16	SF	$120	$1,920
90316	266.2 to 267.2 feet	Vertical Change	.27"	5 ft	5	REF		
90317	271.9 to 272.9 feet	Vertical Change	.57"	5 ft	5	REF		
90344	272.0 to 275.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	$2,040
90345	278.5 to 279.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780
90346	281.7 to 282.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
90347	285.0 to 286.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
90348	289.1 to 290.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
90349	298.4 to 301.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
90350	309.3 to 314.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
90351	315.3 to 320.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
90352	321.8 to 323.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
90353	328.5 to 340.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,960
90354	343.8 to 348.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
90355	350.8 to 352.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111023	GRANADA DR	PLUMAS ST	DESERT RANCH WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90356	354.6 to 359.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
90359	356.3 to 357.8 feet		5.0-6.0%	5 ft	8			
90360	357.8 to 358.9 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: W *side of* **GRANADA DR** *Starting at:* **PLUMAS ST** **$106,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221026	GRANADA DR	PRIVATE	S DOUBLE TREE WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80830	0.0 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
80806	9.7 to 10.7 feet	**Vertical Change**	.51"	5 ft	5	REF		
80831	23.0 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
80807	50.1 to 51.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
80832	51.2 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
80808	54.2 to 55.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
80809	57.5 to 58.5 feet	**Vertical Change**	-.44"	5 ft	5	REF		
80810	60.7 to 61.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
80833	71.8 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
80834	81.3 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
80835	99.9 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
80836	127.2 to 130.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
80837	132.3 to 150.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
80838	150.9 to 157.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
80839	161.3 to 204.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	213	SF	$120	**$25,620**
80812	204.8 to 205.8 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
80840	212.5 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
80841	231.2 to 233.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
80842	235.7 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
80813	250.9 to 251.9 feet	**Vertical Change**	-.55"	5 ft	5	REF		
80843	253.4 to 257.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
80844	257.7 to 260.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
80872	260.6 to 271.8 feet	Key Note Segment		5 ft	56			
80814	285.8 to 286.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
80845	288.8 to 297.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
80815	289.5 to 290.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
80873	297.0 to 316.8 feet	Key Note Segment		5 ft	99			
80816	309.0 to 310.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221026	GRANADA DR	PRIVATE	S DOUBLE TREE WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80846	316.8 to 325.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	43	SF	$40	$1,720
80817	322.2 to 323.2 feet	Vertical Change	.46"	5 ft	5	REF		
80847	327.7 to 330.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,620
80848	334.1 to 338.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
80874	338.1 to 356.8 feet	Key Note Segment		5 ft	94			
80849	368.8 to 369.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
80850	374.0 to 375.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
80851	376.0 to 380.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
80875	380.1 to 393.3 feet	Key Note Segment		5 ft	66			
80818	393.7 to 394.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
80852	396.9 to 404.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
80876	405.2 to 417.6 feet	Key Note Segment		5 ft	62			
80853	418.0 to 425.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	37	SF	$40	$1,460
80819	418.1 to 419.1 feet	Vertical Change	.6"	5 ft	5	REF		
80854	429.0 to 441.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380
80820	430.1 to 431.1 feet	Vertical Change	-.44"	5 ft	5	REF		
80877	441.9 to 460.9 feet	Key Note Segment		5 ft	95			
80821	442.9 to 443.9 feet	Vertical Change	.51"	5 ft	5	REF		
80855	461.8 to 463.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
80822	461.9 to 462.9 feet	Vertical Change	-.3"	5 ft	5	REF		
80856	471.5 to 481.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
80878	481.6 to 501.8 feet	Key Note Segment		5 ft	101			
80823	483.2 to 484.2 feet	Vertical Change	.45"	5 ft	5	REF		
80857	501.8 to 513.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	60	SF	$40	$2,400
80858	514.3 to 526.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
80824	514.4 to 515.4 feet	Vertical Change	-.27"	5 ft	5	REF		
80879	526.8 to 538.8 feet	Key Note Segment		5 ft	60			
80825	527.3 to 528.3 feet	Vertical Change	.48"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221026	GRANADA DR	PRIVATE	S DOUBLE TREE WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80859	538.8 to 550.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	59	SF	$40	$2,340
80880	550.5 to 561.9 feet	Key Note Segment		5 ft	57			
80860	562.7 to 565.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
80861	566.2 to 573.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
80862	573.9 to 586.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	$7,440
80826	574.4 to 575.4 feet	Vertical Change	.51"	5 ft	5	REF		
80881	586.6 to 605.2 feet	Key Note Segment		5 ft	93			
80827	597.9 to 598.9 feet	Vertical Change	.26"	5 ft	5	REF		
80863	605.2 to 608.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$680
80828	605.9 to 606.9 feet	Vertical Change	.27"	5 ft	5	REF		
80864	609.3 to 612.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
80865	613.4 to 617.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,340
80866	617.3 to 627.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
80882	627.6 to 645.2 feet	Key Note Segment		5 ft	88			
80867	646.3 to 649.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
80868	649.0 to 650.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
80829	655.6 to 656.6 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
80869	657.2 to 664.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
80883	665.9 to 678.6 feet	Key Note Segment		5 ft	64			
80870	680.2 to 682.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
80871	684.6 to 688.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100

TOTAL COST FOR: N *side of* **GRANADA DR** *Starting at:* **PRIVATE** **$210,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221031	GRANADA DR	S DOUBLE TREE WAY	WESTBERRY BVD	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80901	0.0 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
80902	1.5 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
80945	4.8 to 16.8 feet	Key Note Segment		5 ft	60			
80903	16.8 to 20.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
80884	17.4 to 18.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
80904	21.2 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
80905	33.6 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
80946	36.6 to 56.7 feet	Key Note Segment		5 ft	101			
80906	58.5 to 59.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
80907	60.4 to 63.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
80885	62.9 to 63.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
80908	64.6 to 66.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
80909	68.4 to 72.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
80947	73.9 to 95.8 feet	Key Note Segment		5 ft	109			
80887	94.5 to 95.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
80910	99.3 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
80911	107.8 to 117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
80948	117.5 to 130.2 feet	Key Note Segment		5 ft	63			
80888	130.3 to 131.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
80912	131.4 to 136.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,180**
80913	136.7 to 139.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
80949	140.3 to 152.6 feet	Key Note Segment		5 ft	61			
80889	141.2 to 142.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
80914	152.6 to 154.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$420**
80915	158.4 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
80916	164.8 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80890	169.8 to 170.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
80917	173.4 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221031	GRANADA DR	S DOUBLE TREE WAY	WESTBERRY BVD	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80950	175.6 to 201.8 feet	Key Note Segment		5 ft	131			
80918	207.3 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
80951	215.8 to 235.3 feet	Key Note Segment		5 ft	98			
80919	235.8 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
80891	242.4 to 243.4 feet	**Vertical Change**	.96"	5 ft	5	REF		
80892	252.4 to 253.4 feet	**Vertical Change**	.8"	5 ft	5	SF	$75	**$375**
80920	255.8 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80893	255.9 to 256.9 feet	**Vertical Change**	-.99"	5 ft	5	REF		
80952	258.3 to 271.5 feet	Key Note Segment		5 ft	66			
80894	264.6 to 265.6 feet	**Vertical Change**	1.16"	5 ft	5	REF		
80921	272.2 to 277.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,020**
80959	277.9 to 278.9 feet		5.0-6.0%	5 ft	5			
80922	278.9 to 280.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
80953	281.3 to 294.3 feet	Key Note Segment		5 ft	65			
80923	295.2 to 308.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
80924	310.6 to 315.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
80954	318.5 to 337.5 feet	Key Note Segment		5 ft	95			
80896	319.5 to 323.0 feet	**Vertical Change**	.57"	5 ft	18	REF		
80925	337.5 to 339.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
80897	337.7 to 338.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
80926	345.6 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
80927	350.2 to 355.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
80955	355.0 to 374.1 feet	Key Note Segment		5 ft	96			
80898	355.8 to 356.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
80928	374.3 to 375.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
80899	374.4 to 375.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
80929	375.7 to 379.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
80930	381.7 to 383.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221031	GRANADA DR	S DOUBLE TREE WAY	WESTBERRY BVD	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80931	392.8 to 398.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
80956	399.3 to 411.6 feet	Key Note Segment		5 ft	62			
80957	424.2 to 443.7 feet	Key Note Segment		5 ft	98			
80932	447.0 to 459.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
80933	459.0 to 466.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
80934	467.1 to 468.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
80958	468.4 to 481.3 feet	Key Note Segment		5 ft	65			
80935	481.3 to 488.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,500**
80936	488.9 to 491.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
80937	492.9 to 497.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
80938	497.8 to 506.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
80939	507.3 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
80940	510.8 to 514.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
80941	514.7 to 519.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
80942	520.4 to 535.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
80943	535.0 to 548.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
80944	550.1 to 588.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$22,980**
80960	584.8 to 586.0 feet		5.0-6.0%	5 ft	6			
80961	586.0 to 588.4 feet		6.0-7.0%	5 ft	12			
80962	586.0 to 588.4 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
80900	588.5 to 589.5 feet	**Vertical Change**	.91"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **GRANADA DR** *Starting at:* **S DOUBLE TREE WAY** **$141,725.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111014	GRANADA DR	S GRANADA DR	102190 S GRANADA DR	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90284	11.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
90285	17.9 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
90286	26.0 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
90287	34.4 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
90288	43.3 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
90289	44.9 to 46.3 feet		7.0-8.0%	5 ft	7			

TOTAL COST FOR: N *side of* **GRANADA DR** *Starting at:* **S GRANADA DR** **$17,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091616	GRANT AVE	1128 GRANT AVE	TULARE ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130827	0.0 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
130825	4.9 to 5.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
130826	15.7 to 16.7 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **GRANT AVE** *Starting at:* **1128 GRANT AVE** **$11,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202101141	GRANT AVE	914 GRANT AVE	914 GRANT AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131356	0.0 to 13.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
131357	13.4 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
131358	23.5 to 37.7 feet	Key Note Segment		5 ft	71			
131359	41.0 to 50.8 feet	Key Note Segment		5 ft	49			

TOTAL COST FOR: S *side of* **GRANT AVE** *Starting at:* **914 GRANT AVE** **$8,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2110181512	GRAPE ST	1465 GRAPE ST	PAPAYA ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72289	0.2 to 1.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$540**
72290	3.3 to 17.4 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	63	SF	$120	**$7,614**
72287	9.7 to 10.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
72288	19.9 to 20.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
72291	21.4 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,374**
72292	33.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
72293	43.3 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,698**
72294	54.1 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,808**
72295	61.8 to 71.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,454**
72296	74.0 to 75.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
72297	75.3 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**

TOTAL COST FOR: NW *side of* **GRAPE ST** *Starting at:* **1465 GRAPE ST** **$32,521.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110181442	GRAPE ST	PAPAYA ST	KIWI ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72043	0.0 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,566**
72044	4.1 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
72045	10.3 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
72056	13.6 to 31.8 feet	Key Note Segment		5 ft	82			
72057	41.5 to 63.8 feet	Key Note Segment		5 ft	100			
72046	64.0 to 65.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$306**
72047	67.8 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,890**
72048	72.3 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,964**
72058	90.0 to 111.8 feet	Key Note Segment		5 ft	98			
72041	101.9 to 102.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
72049	114.0 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72059	116.8 to 137.9 feet	Key Note Segment		5 ft	95			
72042	127.4 to 128.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
72050	139.7 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
72051	143.6 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
72052	149.0 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
72053	158.8 to 165.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,402**
72054	167.8 to 173.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,808**
72060	173.6 to 193.8 feet	Key Note Segment		5 ft	91			
72055	194.7 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**

TOTAL COST FOR: S *side of* **GRAPE ST** *Starting at:* **PAPAYA ST** **$29,412.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201216	GRAPEFRUIT WAY	GEORGIA AVE	TANGERINE AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105104	1.0 to 2.0 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
105105	5.6 to 6.6 feet	Vertical Change	1.11"	5 ft	5	SF	$75	$375
105106	12.6 to 13.6 feet	Vertical Change	.74"	5 ft	5	SF	$75	$375
105111	29.3 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
105112	35.6 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,780
105113	54.5 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	240	SF	$120	$28,740
105107	92.6 to 93.6 feet	Vertical Change	1.7"	5 ft	5	REF		
105114	105.6 to 113.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
105108	115.8 to 116.8 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
105115	117.0 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
105116	120.8 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
105117	132.5 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	$4,680
105109	140.5 to 141.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
105118	141.8 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
105119	152.8 to 155.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,740
105120	156.8 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,500
105110	165.3 to 166.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
105121	168.6 to 173.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
105122	175.9 to 182.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
105123	183.0 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
105124	189.9 to 192.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
105125	193.1 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220

TOTAL COST FOR: NW *side of* **GRAPEFRUIT WAY** *Starting at:* **GEORGIA AVE** **$89,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201214	GRAPEFRUIT WAY	TANGERINE AVE	GEORGIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105081	0.0 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
105082	15.3 to 28.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
105099	30.8 to 50.7 feet	Key Note Segment		5 ft	100			
105071	31.4 to 32.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
105103	51.5 to 52.8 feet		5.0-6.0%	5 ft	7			
105083	60.3 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
105084	68.0 to 69.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
105085	71.1 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
105100	72.8 to 95.1 feet	Key Note Segment		5 ft	112			
105086	95.8 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
105072	116.8 to 117.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
105073	123.0 to 124.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
105074	129.2 to 132.3 feet	**Vertical Change**	.38"	5 ft	16	REF		
105101	130.8 to 152.9 feet	Key Note Segment		5 ft	110			
105075	140.2 to 141.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105087	153.3 to 156.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	14	SF	$40	**$560**
105088	156.1 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
105076	178.2 to 179.2 feet	**Vertical Change**	.61"	5 ft	5	REF		
105089	181.2 to 185.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
105077	182.5 to 183.5 feet	**Vertical Change**	-.5"	5 ft	5	REF		
105090	188.3 to 189.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
105091	190.2 to 193.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
105078	194.8 to 195.8 feet	**Vertical Change**	-.73"	5 ft	5	REF		
105092	194.8 to 197.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
105093	198.0 to 206.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
105079	206.4 to 207.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105094	206.4 to 210.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
105102	208.8 to 209.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201214	GRAPEFRUIT WAY	TANGERINE AVE	GEORGIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105095	210.3 to 216.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
105096	217.1 to 219.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105097	222.5 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
105098	250.4 to 255.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
105080	255.5 to 256.5 feet	**Vertical Change**	1.54"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: SE *side of* **GRAPEFRUIT WAY** *Starting at:* **TANGERINE AVE** **$96,614.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131301	GRAPEWOOD WAY	ASPEN LN	SUNDANCE LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62733	0.8 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
62721	4.2 to 5.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
62770	19.6 to 42.1 feet	Key Note Segment		5 ft	112			
62722	20.6 to 21.6 feet	**Vertical Change**	-.56"	5 ft	5	REF		
62734	42.9 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
62735	47.9 to 50.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
62736	52.9 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
62771	58.2 to 80.6 feet	Key Note Segment		5 ft	112			
62737	82.1 to 85.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
62738	89.5 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
62739	92.8 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
62723	107.1 to 108.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
62724	122.0 to 123.0 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
62772	131.6 to 154.4 feet	Key Note Segment		5 ft	114			
62740	159.2 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
62773	164.2 to 184.0 feet	Key Note Segment		5 ft	99			
62741	184.9 to 187.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
62742	189.8 to 201.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
62743	204.0 to 211.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
62787	204.1 to 205.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
62744	214.4 to 219.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
62774	219.8 to 240.4 feet	Key Note Segment		5 ft	103			
62745	240.4 to 275.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	177	SF	$40	**$7,080**
62746	278.4 to 285.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
62747	286.0 to 290.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62775	291.7 to 315.2 feet	Key Note Segment		5 ft	118			
62748	322.8 to 338.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
62776	343.6 to 369.8 feet	Key Note Segment		5 ft	131			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131301	GRAPEWOOD WAY	ASPEN LN	SUNDANCE LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62725	368.5 to 369.5 feet	Vertical Change	.37"	5 ft	5	REF		
62749	371.1 to 377.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
62777	378.2 to 399.2 feet	Key Note Segment		5 ft	105			
62750	403.3 to 409.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
62751	413.2 to 420.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
62778	429.8 to 451.4 feet	Key Note Segment		5 ft	108			
62752	467.7 to 491.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	$14,220
62726	486.6 to 487.6 feet	Vertical Change	-.33"	5 ft	5	REF		
62753	494.9 to 503.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
62779	503.5 to 526.5 feet	Key Note Segment		5 ft	115			
62754	529.8 to 531.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
62755	535.8 to 555.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	$11,880
62780	555.6 to 579.7 feet	Key Note Segment		5 ft	121			
62728	556.9 to 557.9 feet	Vertical Change	-.34"	5 ft	5	REF		
62729	569.2 to 570.2 feet	Vertical Change	.28"	5 ft	5	REF		
62756	580.4 to 585.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,080
62781	588.3 to 611.7 feet	Key Note Segment		5 ft	117			
62730	601.5 to 602.5 feet	Vertical Change	.55"	5 ft	5	REF		
62757	614.9 to 626.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
62758	629.1 to 643.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,400
62782	643.1 to 665.7 feet	Key Note Segment		5 ft	113			
62759	666.3 to 670.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	22	SF	$40	$880
62760	671.5 to 706.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	$21,120
62761	709.1 to 716.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
62783	716.7 to 740.0 feet	Key Note Segment		5 ft	117			
62762	744.6 to 748.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
62784	748.8 to 775.7 feet	Key Note Segment		5 ft	135			
62763	786.0 to 795.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131301	GRAPEWOOD WAY	ASPEN LN	SUNDANCE LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62764	800.6 to 802.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
62785	803.6 to 826.0 feet	Key Note Segment		5 ft	112			
62731	804.8 to 805.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
62765	826.0 to 838.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	60	SF	$40	**$2,400**
62766	839.8 to 855.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
62732	852.5 to 853.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
62786	855.9 to 879.3 feet	Key Note Segment		5 ft	117			
62767	880.7 to 883.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
62768	901.3 to 909.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
62788	909.2 to 910.5 feet		5.0-6.0%	5 ft	7			
62769	909.8 to 911.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **GRAPEWOOD WAY** *Starting at:* **ASPEN LN** **$170,704.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109131326	GRAPEWOOD WAY	ASPEN LN	ASPEN LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63063	0.1 to 6.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
63051	9.3 to 10.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
63064	9.6 to 11.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
63065	11.1 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
63066	23.6 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
63067	27.6 to 29.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
63098	29.1 to 42.3 feet	Key Note Segment		5 ft	66			
63068	44.3 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
63099	56.7 to 70.1 feet	Key Note Segment		5 ft	67			
63069	70.1 to 78.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	40	SF	$40	**$1,580**
63052	77.9 to 78.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
63070	78.8 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
63071	83.6 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
63072	91.9 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
63073	109.8 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
63053	113.6 to 114.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
63074	116.3 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
63054	122.9 to 123.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
63055	132.4 to 133.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
63100	135.3 to 149.5 feet	Key Note Segment		5 ft	71			
63075	151.3 to 156.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
63076	158.4 to 170.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
63101	170.2 to 184.3 feet	Key Note Segment		5 ft	71			
63077	184.3 to 188.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$880**
63078	190.0 to 196.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
63079	196.4 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
63080	202.5 to 203.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63081	205.7 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109131326	GRAPEWOOD WAY	ASPEN LN	ASPEN LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63102	219.1 to 233.0 feet	Key Note Segment		5 ft	70			
63082	249.1 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63103	252.8 to 267.0 feet	Key Note Segment		5 ft	71			
63083	268.0 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
63084	295.1 to 296.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
63104	296.8 to 310.4 feet	Key Note Segment		5 ft	68			
63085	310.9 to 314.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
63056	315.6 to 316.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
63105	330.1 to 343.4 feet	Key Note Segment		5 ft	67			
63057	330.9 to 331.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
63058	339.1 to 340.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
63086	344.3 to 347.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
63087	352.9 to 363.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
63088	383.3 to 391.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
63059	388.7 to 389.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
63106	391.5 to 405.4 feet	Key Note Segment		5 ft	70			
63089	406.2 to 407.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
63090	412.1 to 416.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
63107	417.3 to 431.2 feet	Key Note Segment		5 ft	70			
63091	431.3 to 434.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
63092	437.5 to 440.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
63060	442.4 to 443.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
63093	443.3 to 445.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
63061	487.0 to 488.0 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
63108	497.3 to 511.8 feet	Key Note Segment		5 ft	73			
63062	499.8 to 500.8 feet	**Vertical Change**	-.66"	5 ft	5	REF		
63094	513.0 to 514.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63095	515.2 to 522.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109131326	GRAPEWOOD WAY	ASPEN LN	ASPEN LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63109	523.4 to 538.8 feet	Key Note Segment		5 ft	77			
63096	538.8 to 549.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	56	SF	$40	**$2,220**
63097	550.4 to 551.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63110	571.3 to 572.8 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: S / N *side of* **GRAPEWOOD WAY** *Starting at:* **ASPEN LN** **$116,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131307	GRAPEWOOD WAY	SUNDANCE LN	ASPEN LN	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62812	0.0 to 5.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
62813	5.7 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
62861	5.7 to 6.8 feet		6.0-7.0%	5 ft	6			
62814	10.3 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
62815	12.3 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
62844	18.6 to 41.5 feet	Key Note Segment		5 ft	114			
62789	19.7 to 20.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
62816	41.9 to 52.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,120**
62817	55.2 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
62845	58.3 to 80.8 feet	Key Note Segment		5 ft	113			
62790	71.2 to 72.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
62818	81.4 to 125.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	220	SF	$40	**$8,820**
62819	125.5 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
62846	131.8 to 155.5 feet	Key Note Segment		5 ft	118			
62791	133.3 to 134.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
62792	144.7 to 145.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
62820	157.9 to 163.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
62847	165.6 to 187.3 feet	Key Note Segment		5 ft	109			
62821	187.5 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	134	SF	$120	**$16,080**
62822	217.5 to 238.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
62848	238.8 to 260.4 feet	Key Note Segment		5 ft	108			
62823	262.7 to 268.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
62849	270.9 to 292.9 feet	Key Note Segment		5 ft	110			
62824	294.2 to 333.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,340**
62825	336.1 to 339.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
62826	341.9 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
62850	345.8 to 367.2 feet	Key Note Segment		5 ft	107			
62827	367.2 to 377.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131307	GRAPEWOOD WAY	SUNDANCE LN	ASPEN LN	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62828	378.8 to 399.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
62851	399.2 to 420.3 feet	Key Note Segment		5 ft	106			
62852	429.8 to 453.1 feet	Key Note Segment		5 ft	117			
62829	455.3 to 460.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
62830	477.2 to 504.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
62853	505.2 to 526.9 feet	Key Note Segment		5 ft	109			
62831	527.3 to 536.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
62854	536.5 to 559.8 feet	Key Note Segment		5 ft	116			
62793	559.0 to 560.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
62832	560.0 to 562.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
62833	566.9 to 571.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
62795	571.3 to 572.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
62834	587.3 to 609.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
62796	591.5 to 594.8 feet	**Vertical Change**	3.41"	5 ft	16	REF		
62797	596.1 to 599.3 feet	**Vertical Change**	3.03"	5 ft	16	REF		
62855	610.6 to 632.6 feet	Key Note Segment		5 ft	110			
62798	611.8 to 612.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
62799	622.8 to 623.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
62835	633.9 to 643.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
62800	639.3 to 640.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
62836	649.7 to 651.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
62856	662.5 to 689.3 feet	Key Note Segment		5 ft	134			
62837	693.2 to 695.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
62838	709.1 to 711.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
62839	714.3 to 715.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62857	717.1 to 738.9 feet	Key Note Segment		5 ft	109			
62801	740.1 to 741.1 feet	**Vertical Change**	.9"	5 ft	5	SF	$75	**$375**
62862	740.9 to 742.1 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131307	GRAPEWOOD WAY	SUNDANCE LN	ASPEN LN	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62802	745.7 to 746.7 feet	Vertical Change	-.48"	5 ft	5	LF	$75	$375
62858	749.8 to 770.2 feet	Key Note Segment		5 ft	102			
62840	770.2 to 771.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$320
62841	784.2 to 817.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	$19,800
62842	821.4 to 824.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
62859	824.7 to 845.6 feet	Key Note Segment		5 ft	105			
62843	847.2 to 849.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
62804	855.0 to 856.0 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
62805	858.3 to 859.3 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
62860	861.2 to 883.3 feet	Key Note Segment		5 ft	111			
62806	861.9 to 862.9 feet	Vertical Change	.93"	5 ft	5	REF		
62807	881.8 to 882.8 feet	Vertical Change	.41"	5 ft	5	REF		
62809	888.2 to 889.2 feet	Vertical Change	1.19"	5 ft	5	SF	$75	$375
62810	892.1 to 893.1 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
62811	896.5 to 899.9 feet	Vertical Change	.69"	5 ft	17	SF	$75	$1,275

TOTAL COST FOR: S *side of* **GRAPEWOOD WAY** *Starting at:* **SUNDANCE LN** **$174,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071401	GREEN WAY	1008 GREEN WAY	ROGERS ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43797	0.2 to 1.2 feet	Vertical Change	.34"	4 ft	4	LF	$75	**$300**
43800	18.6 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
43798	34.5 to 35.5 feet	Vertical Change	-.32"	4 ft	4	LF	$75	**$300**
43801	39.3 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	140	SF	$120	**$16,848**
43799	46.6 to 47.6 feet	Vertical Change	.72"	4 ft	4	REF		
43802	76.9 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,912**
43803	93.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: S *side of* **GREEN WAY** *Starting at:* **1008 GREEN WAY** **$30,984.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071424	GREEN WAY	1126 MERCED ST	MERCED ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43959	1.7 to 2.7 feet	Vertical Change	.26"	4 ft	4	LF	$75	$300
43960	4.8 to 5.8 feet	Vertical Change	.59"	4 ft	4	SF	$75	$300
43971	7.4 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,872
43972	26.7 to 29.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	$1,392
43961	29.4 to 30.4 feet	Vertical Change	.43"	4 ft	4	REF		
43973	29.6 to 32.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	$1,200
43974	32.4 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	$1,632
43962	34.5 to 35.5 feet	Vertical Change	.78"	4 ft	4	REF		
43963	36.8 to 37.8 feet	Vertical Change	.37"	4 ft	4	LF	$75	$300
43975	47.3 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	$864
43964	48.6 to 49.6 feet	Vertical Change	-.57"	4 ft	4	REF		
43965	54.2 to 55.2 feet	Vertical Change	-.38"	4 ft	4	LF	$75	$300
43966	61.0 to 62.0 feet	Vertical Change	.33"	4 ft	4	LF	$75	$300
43976	62.9 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	$6,096
43967	77.9 to 78.9 feet	Vertical Change	.75"	4 ft	4	SF	$75	$300
43968	84.9 to 85.9 feet	Vertical Change	.42"	4 ft	4	LF	$75	$300
43977	86.8 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	$5,040
43969	94.4 to 95.4 feet	Vertical Change	-.32"	4 ft	4	REF		
43978	98.5 to 100.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	$960
43970	100.6 to 103.4 feet	Vertical Change	.51"	4 ft	11	SF	$75	$840

TOTAL COST FOR: S *side of* **GREEN WAY** *Starting at:* **1126 MERCED ST** **$21,996.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071420	GREEN WAY	1201 ROGERS ST	ROGERS ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43938	0.0 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	31	SF	$120	**$3,744**
43926	7.0 to 8.0 feet	**Vertical Change**	.38"	4 ft	4	REF		
43939	8.0 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
43928	14.9 to 15.9 feet	**Vertical Change**	.69"	4 ft	4	SF	$75	**$300**
43929	20.7 to 21.7 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**
43930	27.0 to 28.0 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
43931	31.3 to 32.3 feet	**Vertical Change**	1.03"	4 ft	4	SF	$75	**$300**
43932	33.0 to 34.0 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
43942	37.3 to 51.0 feet	Key Note Segment		4 ft	55			
43933	38.7 to 39.7 feet	**Vertical Change**	.43"	4 ft	4	REF		
43940	52.3 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
43934	52.7 to 53.7 feet	**Vertical Change**	.29"	4 ft	4	REF		
43941	63.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,080**
43935	70.8 to 71.8 feet	**Vertical Change**	.27"	4 ft	4	REF		
43936	73.6 to 74.6 feet	**Vertical Change**	-.26"	4 ft	4	REF		
43937	76.7 to 77.7 feet	**Vertical Change**	.48"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **GREEN WAY** *Starting at:* **1201 ROGERS ST** **$16,956.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021104	GREEN WAY	AUSTIN AVE	N LAKE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117532	0.5 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
117533	11.9 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
117534	20.3 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
117535	33.2 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
117536	44.7 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
117537	50.8 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,768**
117538	68.1 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
117539	75.3 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	128	SF	$120	**$15,360**
117540	107.3 to 121.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,768**
117541	126.2 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
117542	135.3 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
117543	160.5 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
117544	173.8 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,896**
117545	196.5 to 199.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
117546	201.7 to 202.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117547	204.8 to 222.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	69	SF	$120	**$8,304**
117548	222.1 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
117549	229.3 to 234.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,592**
117550	234.7 to 251.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
117551	257.6 to 270.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,192**
117552	273.3 to 284.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,472**
117553	287.6 to 291.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
117554	292.8 to 302.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	38	SF	$120	**$4,560**
117555	302.3 to 308.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
117556	313.0 to 324.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
117557	326.4 to 335.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	35	SF	$120	**$4,224**
117558	335.4 to 342.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
117559	345.9 to 347.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021104	GREEN WAY	AUSTIN AVE	N LAKE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117560	350.5 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
117527	355.6 to 356.6 feet	**Vertical Change**	.49"	4 ft	4	REF		
117561	361.4 to 367.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
117562	368.5 to 375.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	27	SF	$120	**$3,264**
117563	379.0 to 382.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
117564	384.8 to 388.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
117565	388.0 to 391.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,584**
117566	391.3 to 403.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,616**
117567	406.6 to 410.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
117568	413.3 to 439.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	103	SF	$120	**$12,336**
117569	442.9 to 474.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	126	SF	$120	**$15,072**
117528	474.1 to 475.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
117570	516.2 to 564.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	194	SF	$120	**$23,232**
117529	522.3 to 523.3 feet	**Vertical Change**	.26"	4 ft	4	REF		
117571	606.7 to 610.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
117572	617.3 to 621.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
117573	630.9 to 641.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,088**
117530	631.0 to 632.0 feet	**Vertical Change**	.44"	4 ft	4	REF		
117574	647.8 to 659.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
117575	665.1 to 667.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
117576	676.5 to 679.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
117577	682.3 to 692.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,800**
117578	696.4 to 704.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
117579	704.2 to 714.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	41	SF	$120	**$4,896**
117580	715.8 to 741.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	104	SF	$120	**$12,432**
117581	743.5 to 748.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	21	SF	$120	**$2,496**
117582	748.8 to 758.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
117531	749.1 to 750.1 feet	**Vertical Change**	.57"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021104	GREEN WAY	AUSTIN AVE	N LAKE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117583	758.5 to 776.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	72	SF	$120	**$8,592**
117584	779.0 to 798.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	**$9,552**

TOTAL COST FOR: S *side of* **GREEN WAY** *Starting at:* **AUSTIN AVE** **$264,816.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106071418	GREEN WAY	MERCED ST	1202 GREEN WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43916	0.0 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,984**
43917	9.6 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
43918	16.6 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
43919	21.8 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,600**
43920	29.7 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
43910	38.0 to 39.0 feet	**Vertical Change**	.52"	4 ft	4	REF		
43921	42.3 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	50	SF	$120	**$6,000**
43922	54.8 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
43911	61.7 to 62.7 feet	**Vertical Change**	1.77"	4 ft	4	REF		
43923	61.7 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
43912	66.7 to 67.7 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
43924	76.7 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
43913	86.2 to 87.2 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
43914	91.0 to 92.0 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
43915	95.7 to 96.7 feet	**Vertical Change**	.45"	4 ft	4	LF	$75	**$300**
43925	98.2 to 101.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**

TOTAL COST FOR: N *side of* **GREEN WAY** *Starting at:* **MERCED ST** **$31,008.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091359	GREEN WAY	N D ST	1205 GREEN WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54559	3.4 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
54560	12.3 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
54600	26.0 to 48.3 feet	Key Note Segment		5 ft	112			
54561	59.6 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
54546	61.6 to 62.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
54562	80.5 to 84.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
54547	87.6 to 88.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
54563	87.7 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
54564	106.6 to 113.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
54565	114.0 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
54566	117.9 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
54567	125.9 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
54568	137.0 to 143.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
54548	140.3 to 141.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
54569	143.8 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
54570	166.8 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
54549	199.4 to 200.4 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
54571	220.8 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
54572	229.0 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
54550	243.6 to 244.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
54551	251.7 to 252.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
54573	262.7 to 266.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
54574	270.8 to 278.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
54552	277.4 to 278.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
54575	280.7 to 283.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
54576	285.4 to 287.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
54577	288.5 to 311.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,740**
54578	311.4 to 317.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091359	GREEN WAY	N D ST	1205 GREEN WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54553	311.9 to 312.9 feet	Vertical Change	.36"	5 ft	5	REF		
54554	320.8 to 321.8 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
54579	322.9 to 344.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	$12,900
54555	329.1 to 330.1 feet	Vertical Change	-.36"	5 ft	5	REF		
54580	346.4 to 352.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	$3,540
54581	352.3 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
54582	363.3 to 382.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,460
54583	389.2 to 392.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
54584	394.7 to 404.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
54585	413.1 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
54586	420.3 to 422.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
54587	425.2 to 426.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
54588	448.6 to 452.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
54556	449.6 to 450.6 feet	Vertical Change	.26"	5 ft	5	REF		
54589	460.9 to 462.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
54590	466.1 to 474.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
54591	474.3 to 482.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,860
54557	483.9 to 484.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
54592	485.0 to 491.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020
54593	493.9 to 507.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	$8,160
54594	509.2 to 512.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
54595	516.3 to 521.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
54596	522.8 to 524.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$960
54597	524.4 to 525.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$840
54558	526.8 to 527.8 feet	Vertical Change	-.45"	5 ft	5	REF		
54598	527.4 to 528.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$900
54599	530.8 to 535.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760

TOTAL COST FOR: N *side of* **GREEN WAY** *Starting at:* **N D ST** **$168,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021438	GREEN WAY	N LAKE ST	AUSTIN AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118825	2.3 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,200**
118871	4.8 to 8.0 feet		5.0-6.0%	4 ft	13			
118872	4.8 to 8.0 feet	Running Slope	5.0-6.0%	4 ft	13	SF	$120	**$1,536**
118826	5.6 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
118873	11.3 to 13.0 feet		5.0-6.0%	4 ft	7			
118874	13.0 to 14.8 feet		6.0-7.0%	4 ft	7			
118875	15.7 to 26.7 feet		5.0-6.0%	4 ft	44			
118876	15.7 to 28.6 feet	Running Slope	5.0-6.0%	4 ft	52	SF	$120	**$6,192**
118827	17.4 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
118828	28.7 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,568**
118829	40.3 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
118822	40.7 to 41.7 feet	**Vertical Change**	-.28"	4 ft	4	REF		
118830	55.3 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
118831	67.9 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
118832	76.4 to 92.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,488**
118833	92.0 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	41	SF	$120	**$4,896**
118834	102.5 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	124	SF	$120	**$14,880**
118835	148.7 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
118836	156.9 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
118837	167.4 to 176.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,128**
118838	181.0 to 211.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	122	SF	$120	**$14,640**
118839	218.4 to 226.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
118840	237.8 to 248.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
118841	256.8 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,144**
118842	272.3 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
118843	290.3 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,552**
118844	299.8 to 309.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
118845	310.4 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,872**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021438	GREEN WAY	N LAKE ST	AUSTIN AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118846	333.2 to 367.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	137	SF	$120	**$16,416**
118847	370.2 to 388.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	73	SF	$120	**$8,736**
118848	389.2 to 419.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	121	SF	$120	**$14,544**
118849	419.5 to 428.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,512**
118850	438.1 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	85	SF	$120	**$10,176**
118851	461.7 to 476.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	60	SF	$120	**$7,248**
118852	476.8 to 482.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
118853	482.3 to 520.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	151	SF	$120	**$18,096**
118823	512.4 to 513.4 feet	**Vertical Change**	.26"	4 ft	4	REF		
118854	522.3 to 526.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,016**
118855	529.3 to 531.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
118856	535.0 to 547.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	51	SF	$120	**$6,144**
118857	547.8 to 565.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	**$8,640**
118858	588.3 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
118859	599.8 to 610.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
118860	612.8 to 614.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
118861	623.5 to 631.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
118862	637.5 to 654.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
118863	662.3 to 678.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
118864	682.1 to 683.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
118865	684.1 to 696.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**
118866	697.6 to 710.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	50	SF	$120	**$5,952**
118867	719.8 to 728.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	36	SF	$120	**$4,320**
118868	728.8 to 753.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	100	SF	$120	**$11,952**
118869	753.7 to 759.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
118824	763.8 to 764.8 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
118870	794.7 to 798.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **GREEN WAY** *Starting at:* **N LAKE ST** **$278,268.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021117	GREEN WAY	N LAKE ST	1125 N LAKE ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117648	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117649	1.5 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
117645	4.7 to 5.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
117650	14.8 to 16.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
117651	19.4 to 21.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
117652	23.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
117653	36.8 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
117646	40.3 to 41.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
117654	47.4 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	290	SF	$120	**$34,800**
117647	93.2 to 94.2 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **GREEN WAY** *Starting at:* **N LAKE ST** **$55,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071422	GREEN WAY	ROGERS ST	1125 ROGERS ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43951	5.1 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
43943	11.9 to 15.0 feet	**Vertical Change**	.28"	4 ft	12	REF		
43944	32.1 to 33.1 feet	**Vertical Change**	.76"	4 ft	4	SF	$75	**$300**
43952	35.2 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
43945	38.5 to 39.5 feet	**Vertical Change**	.28"	4 ft	4	REF		
43953	38.7 to 44.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	23	SF	$120	**$2,784**
43958	44.8 to 61.6 feet	Key Note Segment		4 ft	67			
43946	45.5 to 46.5 feet	**Vertical Change**	.27"	4 ft	4	REF		
43947	58.9 to 59.9 feet	**Vertical Change**	.32"	4 ft	4	REF		
43954	66.3 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
43955	72.0 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$1,008**
43948	72.9 to 73.9 feet	**Vertical Change**	.38"	4 ft	4	REF		
43956	80.1 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	54	SF	$120	**$6,432**
43949	80.6 to 81.6 feet	**Vertical Change**	.28"	4 ft	4	REF		
43950	87.4 to 88.4 feet	**Vertical Change**	1.69"	4 ft	4	REF		
43957	94.1 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**

TOTAL COST FOR: S *side of* **GREEN WAY** *Starting at:* **ROGERS ST** **$21,468.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160912	GREENWOOD DR	MONOCOTT DR	SANDALWOOD DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69410	0.0 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
69411	25.6 to 36.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
69408	37.4 to 38.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
69412	38.7 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
69413	47.9 to 59.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
69419	59.5 to 78.1 feet	Key Note Segment		5 ft	93			
69414	80.6 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
69415	86.4 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
69416	93.8 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
69409	96.2 to 97.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
69417	111.8 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,940**
69420	131.7 to 147.6 feet	Key Note Segment		5 ft	80			
69418	182.3 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: S *side of* **GREENWOOD DR** *Starting at:* **MONOCOTT DR** **$67,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160910	GREENWOOD DR	N GRANADA DR	MONOCOTT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69337	1.0 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
69338	22.1 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69315	23.6 to 24.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
69339	27.8 to 35.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
69392	37.1 to 51.0 feet	Key Note Segment		5 ft	70			
69340	51.0 to 54.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
69316	54.9 to 55.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
69317	57.1 to 58.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
69341	57.8 to 59.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
69342	61.4 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
69343	70.7 to 72.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
69344	72.1 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
69393	78.4 to 91.9 feet	Key Note Segment		5 ft	67			
69318	93.0 to 94.0 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
69345	96.2 to 103.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
69346	104.8 to 106.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69319	105.5 to 106.5 feet	**Vertical Change**	1.09"	5 ft	5	REF		
69347	109.5 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
69348	113.5 to 121.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
69349	122.0 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
69350	129.5 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
69351	133.2 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
69394	155.3 to 168.9 feet	Key Note Segment		5 ft	68			
69320	156.5 to 157.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
69395	186.7 to 200.8 feet	Key Note Segment		5 ft	71			
69352	200.8 to 206.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	27	SF	$40	**$1,060**
69353	210.9 to 234.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
69321	232.2 to 233.2 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160910	GREENWOOD DR	N GRANADA DR	MONOCOTT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69354	235.3 to 242.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
69396	242.2 to 255.1 feet	Key Note Segment		5 ft	65			
69322	250.1 to 251.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
69355	258.8 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
69356	267.9 to 287.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
69357	288.3 to 292.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
69397	317.1 to 332.3 feet	Key Note Segment		5 ft	76			
69358	334.8 to 339.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
69359	339.9 to 349.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
69398	349.8 to 363.2 feet	Key Note Segment		5 ft	67			
69360	363.2 to 395.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	163	SF	$40	**$6,500**
69323	371.7 to 372.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
69361	395.7 to 397.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
69362	403.3 to 407.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
69399	422.8 to 435.9 feet	Key Note Segment		5 ft	66			
69363	437.3 to 447.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
69400	447.8 to 461.7 feet	Key Note Segment		5 ft	70			
69364	462.4 to 465.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$540**
69365	474.7 to 494.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
69325	491.0 to 492.0 feet	**Vertical Change**	-.65"	5 ft	5	REF		
69366	496.2 to 497.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
69326	508.3 to 509.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
69401	519.4 to 533.4 feet	Key Note Segment		5 ft	70			
69327	520.4 to 521.4 feet	**Vertical Change**	.55"	5 ft	5	REF		
69367	533.8 to 549.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
69328	534.2 to 535.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
69402	550.8 to 564.5 feet	Key Note Segment		5 ft	69			
69368	573.5 to 576.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160910	GREENWOOD DR	N GRANADA DR	MONOCOTT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69329	580.5 to 581.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
69369	583.5 to 589.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,720
69370	589.7 to 598.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
69330	594.2 to 595.2 feet	Vertical Change	.32"	5 ft	5	REF		
69371	606.2 to 607.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
69331	611.4 to 612.4 feet	Vertical Change	-.31"	5 ft	5	REF		
69372	611.4 to 626.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,240
69403	626.8 to 642.0 feet	Key Note Segment		5 ft	76			
69373	642.3 to 646.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	$780
69374	648.4 to 653.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,940
69404	655.3 to 668.6 feet	Key Note Segment		5 ft	67			
69375	674.3 to 678.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
69332	686.6 to 687.6 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
69376	690.3 to 693.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
69377	694.2 to 702.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	42	SF	$120	$5,040
69333	697.4 to 698.4 feet	Vertical Change	-.65"	5 ft	5	REF		
69378	704.3 to 727.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	$13,980
69379	728.3 to 733.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
69405	733.7 to 748.4 feet	Key Note Segment		5 ft	74			
69380	748.4 to 754.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	$1,200
69381	758.6 to 760.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
69382	760.3 to 765.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
69406	765.6 to 779.4 feet	Key Note Segment		5 ft	69			
69334	767.1 to 768.1 feet	Vertical Change	-.26"	5 ft	5	REF		
69335	769.4 to 770.4 feet	Vertical Change	.31"	5 ft	5	REF		
69383	792.9 to 798.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
69384	808.8 to 822.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$8,040
69336	809.3 to 810.3 feet	Vertical Change	.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160910	GREENWOOD DR	N GRANADA DR	MONOCOTT DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69407	839.9 to 854.3 feet	Key Note Segment		5 ft	72			
69385	855.2 to 858.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
69386	859.1 to 878.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
69387	879.8 to 883.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
69388	883.2 to 902.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
69389	902.1 to 910.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
69390	912.4 to 922.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
69391	922.4 to 930.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: NE *side of* **GREENWOOD DR** *Starting at:* **N GRANADA DR** **$245,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160929	GREENWOOD DR	SANDALWOOD DR	GRANADA DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69642	15.4 to 16.8 feet		5.0-6.0%	5 ft	7			
69587	24.5 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
69588	31.1 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69633	32.8 to 46.7 feet	Key Note Segment		5 ft	70			
69589	48.2 to 54.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
69590	54.4 to 55.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69591	57.3 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
69592	71.2 to 74.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
69593	74.2 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69594	81.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
69634	103.0 to 117.5 feet	Key Note Segment		5 ft	73			
69595	117.5 to 147.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	151	SF	$40	**$6,040**
69575	118.5 to 119.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
69596	150.5 to 177.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,960**
69576	168.6 to 169.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
69597	177.1 to 178.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
69598	178.1 to 180.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
69599	180.7 to 191.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
69600	192.9 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
69601	201.2 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
69635	228.6 to 244.5 feet	Key Note Segment		5 ft	80			
69602	244.5 to 258.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	72	SF	$40	**$2,860**
69636	258.8 to 273.4 feet	Key Note Segment		5 ft	73			
69603	273.4 to 298.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	125	SF	$40	**$5,000**
69604	298.8 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
69605	302.9 to 303.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
69606	306.0 to 317.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	59	SF	$120	**$7,140**
69607	319.0 to 320.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160929	GREENWOOD DR	SANDALWOOD DR	GRANADA DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69608	320.1 to 321.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
69609	323.2 to 326.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
69610	327.3 to 331.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
69637	332.6 to 347.0 feet	Key Note Segment		5 ft	72			
69611	352.1 to 354.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
69612	357.0 to 359.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69613	364.5 to 376.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
69614	378.8 to 381.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
69615	381.5 to 387.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
69616	387.7 to 389.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
69638	389.0 to 401.8 feet	Key Note Segment		5 ft	64			
69617	401.8 to 404.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
69618	404.5 to 412.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
69578	411.1 to 412.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
69639	418.8 to 432.5 feet	Key Note Segment		5 ft	69			
69619	434.1 to 436.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
69620	466.9 to 468.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
69621	474.2 to 495.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
69640	495.0 to 512.8 feet	Key Note Segment		5 ft	89			
69622	512.8 to 515.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
69579	517.5 to 518.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
69623	520.3 to 524.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
69580	522.1 to 523.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
69624	524.8 to 526.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
69625	526.2 to 529.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
69581	531.4 to 532.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
69626	533.3 to 534.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
69582	536.2 to 537.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160929	GREENWOOD DR	SANDALWOOD DR	GRANADA DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69627	548.7 to 552.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
69641	552.5 to 567.3 feet	Key Note Segment		5 ft	74			
69628	570.2 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69629	573.1 to 574.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
69630	575.9 to 578.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
69631	578.0 to 582.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
69583	583.4 to 584.4 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
69584	594.1 to 595.1 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
69585	602.1 to 603.1 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
69586	613.2 to 614.2 feet	**Vertical Change**	2.78"	5 ft	5	SF	$75	**$375**
69632	618.4 to 623.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: SW *side of* **GREENWOOD DR** *Starting at:* **SANDALWOOD DR** **$146,485.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111112	GRENACHE AVE	CHIANTI AVE	MERLOT AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91025	4.7 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91026	6.3 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91027	19.5 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91038	22.4 to 36.5 feet	Key Note Segment		5 ft	71			
91028	36.6 to 41.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
91029	41.9 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
91020	42.3 to 43.3 feet	**Vertical Change**	2.73"	5 ft	5	REF		
91030	64.8 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
91039	73.3 to 87.4 feet	Key Note Segment		5 ft	71			
91021	73.7 to 74.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
91031	87.7 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
91032	88.8 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91033	103.3 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
91034	114.8 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91035	119.8 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
91036	125.8 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
91040	136.0 to 150.0 feet	Key Note Segment		5 ft	70			
91022	136.7 to 137.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
91023	150.8 to 151.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
91037	150.9 to 169.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
91024	164.1 to 165.1 feet	**Vertical Change**	.56"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **GRENACHE AVE** *Starting at:* **CHIANTI AVE** **$45,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111053	GRENACHE AVE	GAMAY AVE	CHIANTI AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90704	0.4 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
90705	2.3 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90746	9.9 to 23.8 feet	Key Note Segment		5 ft	70			
90747	66.6 to 81.7 feet	Key Note Segment		5 ft	76			
90685	82.0 to 83.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
90706	82.2 to 84.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	12	SF	$40	**$480**
90707	85.7 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
90708	86.8 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
90748	94.3 to 109.4 feet	Key Note Segment		5 ft	76			
90686	102.8 to 103.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
90709	109.6 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
90710	119.3 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
90711	120.8 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
90712	136.0 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
90713	145.3 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
90749	155.2 to 169.3 feet	Key Note Segment		5 ft	71			
90714	169.4 to 173.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$820**
90715	175.6 to 179.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
90716	182.1 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
90687	190.0 to 191.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
90717	199.3 to 219.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	102	SF	$120	**$12,180**
90718	219.8 to 224.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
90688	222.8 to 223.8 feet	**Vertical Change**	1.66"	5 ft	5	REF		
90750	224.1 to 237.6 feet	Key Note Segment		5 ft	68			
90719	237.6 to 249.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	59	SF	$40	**$2,340**
90751	250.3 to 263.7 feet	Key Note Segment		5 ft	67			
90720	268.0 to 292.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,940**
90721	299.9 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111053	GRENACHE AVE	GAMAY AVE	CHIANTI AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90752	327.3 to 340.7 feet	Key Note Segment		5 ft	67			
90722	360.1 to 362.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
90753	362.8 to 376.3 feet	Key Note Segment		5 ft	68			
90689	376.9 to 377.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
90723	406.7 to 418.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
90724	427.6 to 429.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
90754	430.1 to 445.1 feet	Key Note Segment		5 ft	75			
90725	445.8 to 448.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
90726	448.0 to 449.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90727	451.8 to 456.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90755	457.4 to 470.9 feet	Key Note Segment		5 ft	68			
90690	464.5 to 465.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
90691	471.4 to 472.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
90728	472.7 to 476.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90729	476.0 to 483.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
90692	482.9 to 483.9 feet	**Vertical Change**	-.72"	5 ft	5	REF		
90730	484.4 to 486.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
90731	488.7 to 491.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
90693	493.4 to 494.4 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
90732	495.3 to 496.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90733	499.2 to 501.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
90734	511.3 to 533.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
90694	511.8 to 512.8 feet	**Vertical Change**	-.38"	5 ft	5	REF		
90756	533.4 to 547.7 feet	Key Note Segment		5 ft	72			
90735	547.7 to 557.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	50	SF	$40	**$2,020**
90695	548.4 to 549.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
90736	557.8 to 558.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90757	559.8 to 575.0 feet	Key Note Segment		5 ft	76			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111053	GRENACHE AVE	GAMAY AVE	CHIANTI AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90696	568.2 to 569.2 feet	Vertical Change	.49"	5 ft	5	REF		
90737	575.2 to 591.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	83	SF	$40	$3,320
90697	585.6 to 586.6 feet	Vertical Change	.65"	5 ft	5	REF		
90738	604.9 to 611.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
90758	612.3 to 625.9 feet	Key Note Segment		5 ft	68			
90698	619.7 to 620.7 feet	Vertical Change	.28"	5 ft	5	REF		
90739	625.9 to 629.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$720
90740	629.5 to 640.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	$6,480
90741	640.3 to 641.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
90742	645.7 to 652.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
90699	653.4 to 656.7 feet	Vertical Change	.49"	5 ft	17	LF	$75	$1,238
90743	664.7 to 666.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
90759	667.0 to 681.7 feet	Key Note Segment		5 ft	74			
90701	683.1 to 684.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
90702	687.5 to 688.5 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
90744	689.1 to 692.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
90703	696.2 to 697.2 feet	Vertical Change	-1.49"	5 ft	5	SF	$75	$375
90745	699.5 to 700.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660

TOTAL COST FOR: W *side of* **GRENACHE AVE** *Starting at:* **GAMAY AVE** **$147,467.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111144	GRENACHE AVE	MERLOT AVE	GAMAY AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91450	4.1 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
91429	8.0 to 9.0 feet	Vertical Change	-.73"	5 ft	5	SF	$75	**$375**
91430	16.6 to 17.6 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
91431	25.2 to 26.2 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
91480	25.7 to 38.1 feet	Key Note Segment		5 ft	62			
91432	27.9 to 28.9 feet	Vertical Change	1.81"	5 ft	5	REF		
91433	30.0 to 31.0 feet	Vertical Change	2.85"	5 ft	5	REF		
91434	32.4 to 35.6 feet	Vertical Change	1.81"	5 ft	16	REF		
91435	39.3 to 40.3 feet	Vertical Change	.41"	5 ft	5	REF		
91451	40.1 to 48.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
91436	48.4 to 49.4 feet	Vertical Change	3.54"	5 ft	5	REF		
91452	48.7 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91481	50.2 to 65.3 feet	Key Note Segment		5 ft	76			
91453	65.3 to 75.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
91437	65.9 to 71.2 feet	Vertical Change	.34"	5 ft	26	REF		
91438	73.3 to 74.3 feet	Vertical Change	3.48"	5 ft	5	REF		
91439	78.8 to 79.8 feet	Vertical Change	.36"	5 ft	5	REF		
91454	78.8 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
91440	84.4 to 89.9 feet	Vertical Change	1.91"	5 ft	28	SF	$75	**$2,063**
91455	87.0 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
91456	95.3 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
91442	100.3 to 101.3 feet	Vertical Change	.91"	5 ft	5	REF		
91443	104.8 to 105.8 feet	Vertical Change	1.54"	5 ft	5	SF	$75	**$375**
91444	107.1 to 108.1 feet	Vertical Change	1.25"	5 ft	5	REF		
91457	107.2 to 110.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
91458	110.1 to 117.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
91459	120.8 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
91460	126.9 to 128.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111144	GRENACHE AVE	MERLOT AVE	GAMAY AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91482	128.1 to 142.3 feet	Key Note Segment		5 ft	71			
91461	146.2 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
91445	148.1 to 149.1 feet	**Vertical Change**	3.44"	5 ft	5	SF	$75	**$375**
91462	149.9 to 153.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
91483	154.3 to 168.0 feet	Key Note Segment		5 ft	68			
91463	168.0 to 187.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	100	SF	$40	**$3,980**
91464	191.8 to 197.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
91465	199.9 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
91466	207.5 to 209.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91467	212.4 to 213.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
91468	222.1 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
91469	229.3 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91484	230.9 to 245.3 feet	Key Note Segment		5 ft	72			
91446	245.5 to 246.5 feet	**Vertical Change**	1.07"	5 ft	5	REF		
91470	245.5 to 249.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
91471	251.1 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
91472	256.8 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
91447	263.5 to 264.5 feet	**Vertical Change**	1.63"	5 ft	5	SF	$75	**$375**
91473	266.5 to 274.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
91474	276.3 to 282.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
91485	282.8 to 297.3 feet	Key Note Segment		5 ft	73			
91448	291.1 to 292.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
91475	297.4 to 302.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$1,000**
91476	302.4 to 310.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
91486	312.3 to 325.7 feet	Key Note Segment		5 ft	67			
91449	320.2 to 321.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
91477	326.0 to 329.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$720**
91478	330.2 to 331.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111144	GRENACHE AVE	MERLOT AVE	GAMAY AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91479	335.0 to 352.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**

TOTAL COST FOR: E *side of* **GRENACHE AVE** *Starting at:* **MERLOT AVE** **$82,092.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191334	HACIENDA ST	APPLE CT	POMEGRANATE ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74014	0.0 to 7.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,834**
74015	7.1 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
74016	13.0 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
74017	22.3 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,104**
74018	33.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
74012	34.0 to 35.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
74019	40.3 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,850**
74020	69.9 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74021	74.8 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,344**
74022	91.8 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
74013	95.2 to 96.2 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$338**
74023	109.3 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
74024	120.8 to 121.9 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **HACIENDA ST** *Starting at:* **APPLE CT** **$45,265.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191533	HACIENDA ST	APPLE ST	LA QUINTA WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74972	0.6 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
74973	6.3 to 9.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,782**
74974	11.9 to 14.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,242**
74975	16.7 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,424**
74976	32.4 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74977	35.5 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,362**
74978	65.8 to 81.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,640**
74979	82.8 to 95.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,696**
74980	97.5 to 101.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,052**
74981	101.8 to 123.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,556**
74982	129.3 to 141.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,804**
74983	144.5 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,996**

TOTAL COST FOR: E *side of* **HACIENDA ST** *Starting at:* **APPLE ST** **$69,768.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191450	HACIENDA ST	COCONUT ST	APPLE ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74609	0.0 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
74600	6.2 to 7.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
74610	6.3 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,266**
74634	32.3 to 51.7 feet	Key Note Segment		5 ft	87			
74611	53.0 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
74635	56.4 to 79.8 feet	Key Note Segment		5 ft	105			
74601	79.4 to 80.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
74612	80.0 to 82.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$450**
74613	82.8 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
74614	91.7 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
74615	100.0 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,052**
74616	103.8 to 111.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,996**
74636	111.2 to 133.6 feet	Key Note Segment		5 ft	101			
74602	132.6 to 133.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
74637	137.6 to 160.3 feet	Key Note Segment		5 ft	102			
74617	162.2 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,806**
74638	179.1 to 199.3 feet	Key Note Segment		5 ft	91			
74603	188.4 to 189.4 feet	**Vertical Change**	.5"	5 ft	5	REF		
74618	199.4 to 219.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	89	SF	$40	**$3,546**
74604	200.6 to 201.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
74619	222.8 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
74639	237.8 to 259.5 feet	Key Note Segment		5 ft	98			
74620	260.5 to 263.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$558**
74640	264.3 to 285.9 feet	Key Note Segment		5 ft	97			
74621	287.3 to 301.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
74622	302.3 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
74623	311.7 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,914**
74641	323.5 to 344.4 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191450	HACIENDA ST	COCONUT ST	APPLE ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74605	344.6 to 345.6 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$338
74624	345.8 to 349.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	$1,890
74642	349.5 to 372.3 feet	Key Note Segment		5 ft	103			
74606	360.6 to 361.6 feet	Vertical Change	-.33"	5 ft	5	REF		
74625	372.9 to 404.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	$16,794
74643	405.9 to 427.3 feet	Key Note Segment		5 ft	96			
74644	431.3 to 453.1 feet	Key Note Segment		5 ft	98			
74626	454.6 to 462.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,374
74627	465.8 to 480.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	$7,830
74645	483.2 to 504.7 feet	Key Note Segment		5 ft	97			
74628	507.2 to 509.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,026
74646	509.1 to 530.8 feet	Key Note Segment		5 ft	98			
74629	532.2 to 535.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,890
74630	536.2 to 554.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,098
74631	555.5 to 560.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,862
74647	560.8 to 583.3 feet	Key Note Segment		5 ft	101			
74607	583.5 to 584.5 feet	Vertical Change	.35"	5 ft	5	LF	$75	$338
74648	587.3 to 608.7 feet	Key Note Segment		5 ft	96			
74608	588.0 to 589.0 feet	Vertical Change	.26"	5 ft	5	REF		
74632	609.5 to 611.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$918
74633	615.1 to 617.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,512

TOTAL COST FOR: E *side of* **HACIENDA ST** *Starting at:* **COCONUT ST** **$98,811.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191534	HACIENDA ST	LA QUINTA WAY	APPLE ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74988	1.1 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	4	SF	$120	**$540**
74989	4.8 to 9.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
74990	9.0 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
74984	13.5 to 14.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
74991	18.2 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
74992	25.8 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
74985	41.7 to 42.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$338**
74993	43.2 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
74994	55.1 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
74995	60.6 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
74996	67.4 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,942**
74997	79.5 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
74986	81.2 to 82.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
74998	91.5 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,912**
74999	111.0 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,610**
75000	132.7 to 140.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,104**
74987	134.3 to 135.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
75001	142.8 to 149.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,510**

TOTAL COST FOR: W *side of* **HACIENDA ST** *Starting at:* **LA QUINTA WAY** **$50,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191435	HACIENDA ST	POMEGRANATE ST	COCONUT ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74500	0.0 to 6.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,402**
74501	6.6 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,242**
74519	9.8 to 31.3 feet	Key Note Segment		5 ft	97			
74493	10.4 to 11.4 feet	**Vertical Change**	.51"	5 ft	5	REF		
74494	31.2 to 32.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74502	34.3 to 36.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**
74520	36.2 to 57.4 feet	Key Note Segment		5 ft	95			
74503	60.5 to 61.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74504	62.3 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,268**
74505	69.4 to 73.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,214**
74506	73.8 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,234**
74521	91.5 to 113.7 feet	Key Note Segment		5 ft	100			
74507	115.3 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74522	118.4 to 142.3 feet	Key Note Segment		5 ft	108			
74495	129.3 to 130.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
74508	143.8 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
74509	160.1 to 165.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,754**
74510	165.2 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,804**
74496	165.8 to 166.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
74523	177.8 to 199.8 feet	Key Note Segment		5 ft	99			
74511	200.7 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,674**
74524	203.8 to 224.8 feet	Key Note Segment		5 ft	95			
74497	224.5 to 225.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
74512	227.3 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
74513	234.3 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
74514	243.4 to 244.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
74515	244.9 to 261.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,748**
74498	250.9 to 251.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191435	HACIENDA ST	POMEGRANATE ST	COCONUT ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74525	263.3 to 284.8 feet	Key Note Segment		5 ft	97			
74499	274.9 to 275.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
74516	285.4 to 289.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$810**
74526	290.2 to 311.8 feet	Key Note Segment		5 ft	97			
74517	312.4 to 317.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$990**
74518	318.8 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: W *side of* **HACIENDA ST** *Starting at:* **POMEGRANATE ST** **$58,878.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211115	HALF DOME CT	408 HALF DOME CT	MONTEREY ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79211	0.4 to 4.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
79212	6.6 to 22.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
79213	21.6 to 22.6 feet		5.0-6.0%	5 ft	5			
79210	22.4 to 23.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **HALF DOME CT** *Starting at:* **408 HALF DOME CT** **$11,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211114	HALF DOME CT	MONTEREY ST	428 HALF DOME CT	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79190	0.0 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
79191	5.1 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
79192	12.6 to 21.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
79205	21.9 to 41.1 feet	Key Note Segment		5 ft	96			
79193	42.4 to 54.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
79206	55.8 to 76.0 feet	Key Note Segment		5 ft	101			
79186	65.8 to 66.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
79194	77.1 to 83.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
79187	79.0 to 80.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
79195	83.2 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
79196	115.5 to 121.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
79197	123.4 to 128.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
79198	128.1 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
79207	129.2 to 149.1 feet	Key Note Segment		5 ft	100			
79188	139.1 to 140.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
79199	155.0 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
79208	180.7 to 200.3 feet	Key Note Segment		5 ft	98			
79189	181.2 to 182.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
79200	204.4 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
79201	218.8 to 232.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
79202	235.3 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
79203	242.6 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
79209	256.6 to 276.3 feet	Key Note Segment		5 ft	98			
79204	277.0 to 291.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**

TOTAL COST FOR: N/W/S *side of* **HALF DOME CT** *Starting at:* **MONTEREY ST** **$79,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261437	HAMPTON DR	3001 HAMPTON DR	HILLSBORO AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109757	0.0 to 16.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
109762	15.6 to 16.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
109758	18.3 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
109759	25.7 to 69.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	219	SF	$120	**$26,280**
109763	33.1 to 34.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
109755	40.5 to 41.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
109756	52.3 to 53.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
109760	70.5 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
109761	78.7 to 93.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**

TOTAL COST FOR: S *side of* **HAMPTON DR** *Starting at:* **3001 HAMPTON DR** **$50,538.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261430	HAMPTON DR	3245 HAMPTON DR	3209 HAMPTON DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109754	3.1 to 20.8 feet	Key Note Segment		5 ft	89			
109749	20.7 to 21.7 feet	**Vertical Change**	-.43"	5 ft	5	REF		
109751	21.1 to 24.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	16	SF	$40	**$620**
109752	26.2 to 39.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
109753	39.6 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **HAMPTON DR** *Starting at:* **3245 HAMPTON DR** **$9,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261448	HAMPTON DR	HILLSBORO AVE	KENTON WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109834	0.0 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
109835	20.5 to 29.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
109836	32.0 to 44.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
109844	45.0 to 76.0 feet	Key Note Segment		5 ft	155			
109827	67.1 to 68.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		
109828	73.9 to 74.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109837	78.0 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
109838	79.1 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
109839	92.3 to 101.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
109840	102.2 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
109829	104.0 to 105.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
109841	127.3 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
109845	131.0 to 159.6 feet	Key Note Segment		5 ft	143			
109830	132.6 to 133.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
109831	142.0 to 143.0 feet	**Vertical Change**	-.49"	5 ft	5	REF		
109832	150.8 to 151.8 feet	**Vertical Change**	.53"	5 ft	5	REF		
109842	161.8 to 163.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
109843	163.7 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
109833	166.5 to 167.5 feet	**Vertical Change**	-.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **HAMPTON DR** *Starting at:* **HILLSBORO AVE** **$64,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261508	HAMPTON DR	KENTON WAY	TIBURON WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109925	0.2 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
109926	5.9 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
109933	24.7 to 53.7 feet	Key Note Segment		5 ft	145			
109914	24.9 to 25.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
109915	34.3 to 35.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
109916	41.2 to 42.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
109927	65.5 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
109928	80.2 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
109934	85.3 to 121.4 feet	Key Note Segment		5 ft	181			
109918	86.2 to 89.1 feet	**Vertical Change**	.27"	5 ft	15	REF		
109919	118.9 to 119.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
109920	120.9 to 121.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109929	122.3 to 126.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
109930	126.1 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
109922	135.8 to 136.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
109935	160.5 to 179.9 feet	Key Note Segment		5 ft	97			
109923	164.0 to 165.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109931	181.7 to 189.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
109924	185.8 to 186.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
109932	189.2 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**

TOTAL COST FOR: N *side of* **HAMPTON DR** *Starting at:* **KENTON WAY** **$46,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261429	HAMPTON DR	TIBURON WAY	3245 HAMPTON DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109715	0.5 to 13.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
109694	2.7 to 3.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
109716	16.3 to 18.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
109717	21.7 to 22.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
109718	26.0 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
109695	33.3 to 34.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
109743	35.4 to 64.1 feet	Key Note Segment		5 ft	143			
109696	46.1 to 47.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
109697	64.2 to 65.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109719	65.3 to 69.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,580**
109720	70.0 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
109721	92.2 to 93.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
109722	94.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
109723	106.7 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
109744	110.5 to 139.4 feet	Key Note Segment		5 ft	145			
109699	113.4 to 114.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
109700	121.5 to 122.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
109724	139.9 to 141.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
109701	143.3 to 144.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
109725	143.3 to 159.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
109726	159.1 to 165.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
109727	165.2 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
109702	166.3 to 167.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
109728	170.3 to 180.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
109729	180.8 to 183.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109745	185.9 to 212.6 feet	Key Note Segment		5 ft	134			
109703	186.3 to 187.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
109704	205.8 to 206.8 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261429	HAMPTON DR	TIBURON WAY	3245 HAMPTON DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109730	216.0 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
109731	217.3 to 222.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
109705	218.9 to 219.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
109746	222.1 to 252.4 feet	Key Note Segment		5 ft	152			
109706	231.8 to 232.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
109707	237.6 to 238.6 feet	**Vertical Change**	2.26"	5 ft	5	REF		
109708	252.4 to 253.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
109732	253.2 to 256.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
109733	257.6 to 273.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
109734	275.3 to 279.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
109735	279.5 to 288.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
109709	282.1 to 283.1 feet	**Vertical Change**	1.95"	5 ft	5	REF		
109736	289.2 to 301.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
109737	303.4 to 322.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
109710	307.2 to 308.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109747	322.8 to 372.3 feet	Key Note Segment		5 ft	248			
109711	326.6 to 327.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
109712	332.1 to 333.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109713	338.7 to 339.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
109738	372.9 to 377.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
109739	377.6 to 381.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
109740	381.7 to 390.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109741	390.3 to 391.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
109748	392.0 to 406.8 feet	Key Note Segment		5 ft	74			
109714	406.7 to 407.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
109742	407.3 to 411.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	23	SF	$40	**$900**

TOTAL COST FOR: N *side of* **HAMPTON DR** *Starting at:* **TIBURON WAY** **$112,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2201121401	HARBOR CT	1065 HARBOR CT	DRIFTWOOD DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96082	0.0 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
96074	12.7 to 16.5 feet	**Vertical Change**	.31"	5 ft	19	REF		
96083	13.6 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96104	15.0 to 36.1 feet	Key Note Segment		5 ft	106			
96084	38.6 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
96085	39.8 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
96075	46.2 to 47.2 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
96086	49.4 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
96087	57.2 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
96105	59.6 to 79.3 feet	Key Note Segment		5 ft	99			
96088	80.2 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
96089	83.8 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
96106	88.4 to 110.0 feet	Key Note Segment		5 ft	108			
96076	100.7 to 101.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
96090	111.3 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
96091	123.6 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
96077	128.4 to 129.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
96092	133.9 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
96107	137.0 to 158.3 feet	Key Note Segment		5 ft	107			
96093	158.8 to 160.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
96094	163.8 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
96078	168.5 to 169.5 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
96095	170.3 to 173.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
96108	173.9 to 193.8 feet	Key Note Segment		5 ft	100			
96096	195.6 to 199.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
96097	201.6 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
96079	205.2 to 206.2 feet	**Vertical Change**	.64"	5 ft	5	REF		
96098	210.9 to 216.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2201121401	HARBOR CT	1065 HARBOR CT	DRIFTWOOD DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96099	216.7 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
96100	230.7 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
96101	247.8 to 249.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
96109	251.9 to 271.6 feet	Key Note Segment		5 ft	99			
96080	262.4 to 263.4 feet	**Vertical Change**	1.23"	5 ft	5	REF		
96102	273.7 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
96110	281.7 to 311.1 feet	Key Note Segment		5 ft	147			
96081	282.5 to 283.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
96103	315.9 to 325.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**

TOTAL COST FOR: N/W *side of* **HARBOR CT** *Starting at:* **1065 HARBOR CT** **$73,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121358	HARBOR CT	DRIFTWOOD DR	DRIFTWOOD DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96056	0.0 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
96049	12.1 to 13.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
96057	18.9 to 20.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
96070	21.6 to 40.8 feet	Key Note Segment		5 ft	96			
96058	42.6 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
96059	45.7 to 52.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
96050	47.1 to 48.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
96060	52.1 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
96061	65.2 to 74.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
96071	74.7 to 94.5 feet	Key Note Segment		5 ft	99			
96051	75.7 to 76.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
96052	85.1 to 86.1 feet	**Vertical Change**	.62"	5 ft	5	REF		
96053	94.7 to 95.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
96062	96.9 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
96072	105.4 to 125.8 feet	Key Note Segment		5 ft	102			
96063	127.9 to 132.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
96064	132.8 to 135.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,620**
96065	136.7 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
96054	136.9 to 137.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
96066	146.2 to 152.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
96067	152.0 to 153.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
96068	157.0 to 158.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
96073	158.8 to 182.8 feet	Key Note Segment		5 ft	120			
96055	172.3 to 173.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
96069	184.0 to 186.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: E *side of* **HARBOR CT** *Starting at:* **DRIFTWOOD DR** **$50,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121225	HARBOR DR	BAY VIEW DR	LIGHTHOUSE DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94959	0.0 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
94960	7.7 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95007	11.4 to 33.5 feet	Key Note Segment		5 ft	111			
94939	19.7 to 20.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
94961	33.5 to 50.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	87	SF	$40	**$3,460**
94940	52.6 to 53.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94962	53.1 to 56.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
94963	56.0 to 58.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
94964	60.4 to 65.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
94965	65.6 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
95008	67.7 to 84.5 feet	Key Note Segment		5 ft	84			
94966	84.9 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
94941	85.0 to 86.0 feet	**Vertical Change**	.75"	5 ft	5	REF		
94967	90.8 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94968	97.8 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94969	108.4 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
94970	116.8 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
95009	129.6 to 143.0 feet	Key Note Segment		5 ft	67			
94942	137.5 to 138.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
94943	148.9 to 149.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
94971	149.8 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
94972	152.4 to 156.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
94944	157.3 to 158.3 feet	**Vertical Change**	-1.63"	5 ft	5	SF	$75	**$375**
94973	162.9 to 164.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
94974	164.1 to 168.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
94975	168.8 to 175.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
94976	185.4 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
95010	189.3 to 205.1 feet	Key Note Segment		5 ft	79			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121225	HARBOR DR	BAY VIEW DR	LIGHTHOUSE DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94977	209.6 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
94978	230.3 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
94945	236.4 to 237.4 feet	**Vertical Change**	-.48"	5 ft	5	REF		
94979	240.7 to 247.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
95011	249.0 to 264.8 feet	Key Note Segment		5 ft	79			
94946	258.3 to 259.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
94980	265.4 to 273.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,560**
94981	273.8 to 278.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
94982	278.1 to 280.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
94983	282.8 to 287.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
94984	291.2 to 296.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
94985	296.7 to 298.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
94947	299.2 to 300.2 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
94986	304.6 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
95012	309.5 to 325.0 feet	Key Note Segment		5 ft	78			
94948	318.7 to 319.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
94987	325.4 to 326.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
94949	326.4 to 327.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
94988	330.8 to 332.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
94989	333.1 to 341.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
94990	343.7 to 345.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
94991	345.4 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
94992	349.4 to 353.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
94993	355.3 to 361.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
94950	365.6 to 366.6 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
94994	368.7 to 372.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
95013	377.3 to 400.8 feet	Key Note Segment		5 ft	118			
94951	378.5 to 379.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121225	HARBOR DR	BAY VIEW DR	LIGHTHOUSE DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94995	401.2 to 411.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	53	SF	$40	$2,120
94996	411.8 to 429.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	$10,500
95014	430.8 to 444.9 feet	Key Note Segment		5 ft	71			
94997	444.9 to 448.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	$780
94952	446.1 to 447.1 feet	Vertical Change	-.45"	5 ft	5	REF		
94998	450.9 to 455.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,820
94999	463.9 to 466.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
94953	467.7 to 468.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
95000	470.8 to 474.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
95001	487.1 to 488.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
95015	489.3 to 514.5 feet	Key Note Segment		5 ft	126			
94955	498.7 to 499.7 feet	Vertical Change	.38"	5 ft	5	REF		
94956	507.9 to 508.9 feet	Vertical Change	.31"	5 ft	5	REF		
95002	514.5 to 520.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,140
95003	522.9 to 523.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
95004	526.3 to 534.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
95005	535.1 to 538.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,220
94957	536.5 to 537.5 feet	Vertical Change	.6"	5 ft	5	REF		
95006	541.3 to 543.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
95016	541.9 to 543.8 feet		5.0-6.0%	5 ft	9			
94958	543.8 to 544.8 feet	Vertical Change	.37"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **HARBOR DR** *Starting at:* **BAY VIEW DR** **$125,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121530	HARBOR DR	LIGHTHOUSE DR	BAY VIEW DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97091	0.5 to 8.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
97080	1.3 to 2.3 feet	**Vertical Change**	1.01"	5 ft	5	REF		
97092	10.0 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97093	13.3 to 17.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
97094	21.2 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
97123	29.3 to 42.5 feet	Key Note Segment		5 ft	66			
97095	45.7 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
97096	58.3 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
97124	69.3 to 83.0 feet	Key Note Segment		5 ft	69			
97081	69.9 to 70.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
97131	85.7 to 86.8 feet		5.0-6.0%	5 ft	6			
97097	87.4 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
97098	107.1 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
97099	116.1 to 118.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
97100	119.0 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
97125	128.8 to 143.8 feet	Key Note Segment		5 ft	75			
97101	146.9 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
97102	170.4 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
97082	184.3 to 185.3 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
97083	197.3 to 198.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
97103	198.0 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
97126	209.0 to 224.3 feet	Key Note Segment		5 ft	77			
97104	224.3 to 226.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
97105	228.1 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
97106	236.9 to 251.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
97107	252.3 to 255.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97127	255.8 to 278.7 feet	Key Note Segment		5 ft	115			
97084	279.8 to 280.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121530	HARBOR DR	LIGHTHOUSE DR	BAY VIEW DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97108	284.3 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
97109	290.3 to 293.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
97110	296.0 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
97085	305.7 to 306.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
97111	311.5 to 317.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
97128	317.3 to 331.7 feet	Key Note Segment		5 ft	72			
97112	332.7 to 336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
97113	339.2 to 366.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
97086	356.1 to 357.1 feet	**Vertical Change**	1.23"	5 ft	5	REF		
97114	366.8 to 367.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
97115	368.7 to 372.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
97116	372.8 to 377.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
97117	377.7 to 383.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
97087	382.8 to 383.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
97088	387.2 to 388.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
97118	392.8 to 394.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
97129	394.3 to 408.2 feet	Key Note Segment		5 ft	70			
97089	395.1 to 396.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
97119	408.3 to 434.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	130	SF	$40	**$5,200**
97130	434.7 to 450.0 feet	Key Note Segment		5 ft	77			
97120	451.1 to 452.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97121	460.6 to 468.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
97090	465.3 to 466.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
97122	470.9 to 481.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**

TOTAL COST FOR: W *side of* **HARBOR DR** *Starting at:* **LIGHTHOUSE DR** **$137,325.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031014	HARDING AVE	OWENS ST	305 WILSON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119424	18.1 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
119427	28.2 to 37.0 feet	Key Note Segment		5 ft	44			
119425	37.0 to 38.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
119426	41.5 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **HARDING AVE** *Starting at:* **OWENS ST** **$7,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141011	HARRISON CT	973 HARRISON CT	JEFFERSON AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100524	0.7 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
100525	9.1 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
100554	10.5 to 24.7 feet	Key Note Segment		5 ft	71			
100499	19.2 to 20.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
100526	25.5 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100500	33.6 to 34.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
100527	42.0 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
100501	42.4 to 43.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
100502	47.5 to 48.5 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
100503	49.3 to 50.3 feet	**Vertical Change**	1.04"	5 ft	5	SF	$75	**$375**
100504	54.1 to 55.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
100505	57.3 to 58.3 feet	**Vertical Change**	.85"	5 ft	5	REF		
100528	57.3 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
100506	59.0 to 60.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
100529	59.4 to 63.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
100507	61.8 to 62.8 feet	**Vertical Change**	1.62"	5 ft	5	REF		
100508	72.2 to 73.2 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
100530	79.0 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
100509	79.8 to 80.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
100555	81.8 to 95.8 feet	Key Note Segment		5 ft	70			
100510	84.1 to 85.1 feet	**Vertical Change**	2.64"	5 ft	5	REF		
100531	103.2 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
100532	117.0 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100533	128.4 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
100534	131.8 to 135.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
100535	135.6 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100511	136.0 to 137.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
100560	136.5 to 137.7 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141011	HARRISON CT	973 HARRISON CT	JEFFERSON AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100512	138.2 to 139.2 feet	Vertical Change	.56"	5 ft	5	SF	$75	$375
100536	140.8 to 146.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
100537	146.8 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
100556	154.8 to 169.9 feet	Key Note Segment		5 ft	75			
100538	169.9 to 171.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$220
100539	173.8 to 196.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,560
100514	194.4 to 195.4 feet	Vertical Change	.56"	5 ft	5	REF		
100540	199.6 to 206.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840
100515	204.7 to 205.7 feet	Vertical Change	.3"	5 ft	5	REF		
100541	206.2 to 207.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
100542	211.8 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
100557	216.8 to 230.4 feet	Key Note Segment		5 ft	68			
100516	224.7 to 225.7 feet	Vertical Change	.44"	5 ft	5	REF		
100543	231.0 to 247.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	$9,780
100517	234.0 to 235.0 feet	Vertical Change	.26"	5 ft	5	REF		
100544	247.8 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
100545	253.7 to 256.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
100546	257.2 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
100518	260.5 to 261.5 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
100547	263.6 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260
100548	270.4 to 274.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
100519	273.5 to 274.5 feet	Vertical Change	.49"	5 ft	5	REF		
100558	274.9 to 289.6 feet	Key Note Segment		5 ft	74			
100549	289.7 to 291.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
100550	296.2 to 298.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,620
100551	301.3 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
100559	307.1 to 321.2 feet	Key Note Segment		5 ft	70			
100520	315.2 to 316.2 feet	Vertical Change	-.42"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141011	HARRISON CT	973 HARRISON CT	JEFFERSON AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100521	324.9 to 325.9 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
100552	328.3 to 333.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
100553	336.1 to 353.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
100522	339.4 to 340.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
100561	350.3 to 353.3 feet		5.0-6.0%	5 ft	15			
100562	350.3 to 353.3 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
100523	353.4 to 354.4 feet	**Vertical Change**	.6"	5 ft	5	REF		

TOTAL COST FOR: E/N/W *side of* **HARRISON CT** *Starting at:* **973 HARRISON CT** **$83,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141008	HARRISON CT	JEFFERSON AVE	973 HARRISON CT	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100486	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
100487	4.8 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
100488	10.0 to 21.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
100489	25.1 to 26.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
100481	27.5 to 28.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
100497	27.5 to 41.8 feet	Key Note Segment		5 ft	72			
100490	42.3 to 43.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
100491	44.7 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
100492	57.2 to 59.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
100482	58.0 to 59.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
100498	59.8 to 73.4 feet	Key Note Segment		5 ft	68			
100483	67.5 to 68.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
100493	75.5 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
100494	78.5 to 81.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,860**
100495	85.5 to 87.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
100496	89.8 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	300	SF	$120	**$36,000**
100484	116.8 to 117.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
100485	139.0 to 140.0 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **HARRISON CT** *Starting at:* **JEFFERSON AVE** **$61,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131533	HARVARD AVE	JEFFERSON AVE	PRINCETON AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99165	0.0 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
99166	7.1 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
99167	24.8 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
99168	34.7 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
99169	37.4 to 46.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
99170	47.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99162	56.0 to 57.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
99171	58.4 to 61.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
99172	68.9 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
99173	81.7 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
99174	87.5 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
99175	119.2 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
99163	137.0 to 138.0 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
99176	138.6 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
99177	143.0 to 152.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
99164	152.8 to 153.8 feet	**Vertical Change**	.45"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HARVARD AVE** *Starting at:* **JEFFERSON AVE** **$53,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131534	HARVARD AVE	PRINCETON AVE	UNIVERSITY AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99182	30.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
99178	44.3 to 45.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
99183	54.3 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
99184	68.4 to 69.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
99185	70.9 to 74.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
99179	73.5 to 74.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
99186	74.9 to 80.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,180**
99187	80.2 to 86.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
99180	84.1 to 85.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
99188	87.7 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
99189	109.4 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
99190	122.1 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
99191	128.5 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
99192	134.0 to 137.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
99181	134.3 to 135.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
99193	142.0 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: W *side of* **HARVARD AVE** *Starting at:* **PRINCETON AVE** **$45,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131441	HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98536	4.6 to 21.0 feet	Key Note Segment		5 ft	82			
98427	5.1 to 6.1 feet	Vertical Change	-.27"	5 ft	5	REF		
98428	21.8 to 22.8 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
98429	27.1 to 28.1 feet	Vertical Change	2.6"	5 ft	5	SF	$75	$375
98430	30.8 to 31.8 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
98469	32.8 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
98431	47.0 to 48.0 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
98470	54.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
98471	59.3 to 67.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,920
98537	68.0 to 81.0 feet	Key Note Segment		5 ft	65			
98472	81.8 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
98432	84.9 to 85.9 feet	Vertical Change	.37"	5 ft	5	REF		
98473	99.2 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,420
98554	103.9 to 106.0 feet		5.0-6.0%	5 ft	11			
98555	103.9 to 106.0 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	$1,260
98474	110.3 to 118.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$4,980
98538	119.9 to 133.4 feet	Key Note Segment		5 ft	68			
98475	133.8 to 135.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
98476	138.9 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,740
98539	148.1 to 161.4 feet	Key Note Segment		5 ft	67			
98477	161.4 to 164.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$560
98433	163.5 to 164.5 feet	Vertical Change	.51"	5 ft	5	REF		
98478	165.3 to 168.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
98479	169.4 to 171.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	12	SF	$120	$1,440
98434	174.5 to 175.5 feet	Vertical Change	-.51"	5 ft	5	REF		
98480	174.9 to 179.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
98435	177.3 to 178.3 feet	Vertical Change	.46"	5 ft	5	REF		
98481	183.4 to 206.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	$14,040

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131441	HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98482	210.6 to 222.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
98540	222.4 to 235.8 feet	Key Note Segment		5 ft	67			
98436	223.3 to 224.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
98483	235.9 to 237.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
98437	237.3 to 238.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
98484	240.7 to 246.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
98438	247.7 to 248.7 feet	**Vertical Change**	.5"	5 ft	5	REF		
98485	248.3 to 252.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
98541	252.0 to 265.5 feet	Key Note Segment		5 ft	68			
98486	265.8 to 266.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
98487	269.8 to 273.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
98488	275.5 to 278.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
98489	279.4 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98490	289.8 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
98439	295.3 to 296.3 feet	**Vertical Change**	2.18"	5 ft	5	REF		
98440	298.1 to 299.1 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
98491	303.6 to 317.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
98441	309.6 to 310.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
98492	318.9 to 320.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
98542	320.8 to 334.6 feet	Key Note Segment		5 ft	69			
98493	335.3 to 341.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,200**
98494	341.9 to 349.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
98543	351.7 to 365.9 feet	Key Note Segment		5 ft	71			
98495	365.9 to 367.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
98442	369.6 to 370.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
98443	376.2 to 377.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
98444	386.9 to 387.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
98496	387.4 to 390.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131441	HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98497	390.6 to 399.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
98498	401.7 to 404.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
98499	404.9 to 413.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
98500	417.3 to 418.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98445	419.2 to 420.2 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
98501	429.5 to 434.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
98446	430.5 to 431.5 feet	**Vertical Change**	.58"	5 ft	5	REF		
98502	434.8 to 437.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
98544	437.8 to 451.2 feet	Key Note Segment		5 ft	67			
98503	451.4 to 452.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
98504	452.7 to 461.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
98545	463.2 to 477.8 feet	Key Note Segment		5 ft	73			
98505	477.8 to 478.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
98447	478.6 to 479.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
98448	482.9 to 483.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
98449	487.2 to 488.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
98556	489.9 to 491.4 feet		6.0-7.0%	5 ft	8			
98450	497.3 to 498.3 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
98451	505.7 to 506.7 feet	**Vertical Change**	1.87"	5 ft	5	SF	$75	**$375**
98506	508.9 to 515.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
98507	522.4 to 523.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98508	527.4 to 542.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
98509	543.5 to 547.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
98546	549.4 to 563.8 feet	Key Note Segment		5 ft	72			
98452	550.8 to 551.8 feet	**Vertical Change**	.51"	5 ft	5	REF		
98510	563.8 to 564.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
98511	564.8 to 568.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
98512	570.4 to 574.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131441	HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98547	574.3 to 588.7 feet	Key Note Segment		5 ft	72			
98513	592.6 to 593.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
98514	593.8 to 602.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,460**
98453	597.4 to 598.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
98515	603.1 to 604.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
98557	603.2 to 604.3 feet		5.0-6.0%	5 ft	5			
98454	605.6 to 606.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
98516	607.0 to 609.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
98517	614.3 to 615.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98455	615.0 to 616.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
98456	623.6 to 624.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
98457	627.8 to 628.8 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
98518	634.7 to 641.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
98548	641.0 to 656.0 feet	Key Note Segment		5 ft	75			
98458	654.7 to 655.7 feet	**Vertical Change**	3.26"	5 ft	5	REF		
98519	657.3 to 658.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
98459	669.5 to 670.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
98520	669.9 to 675.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
98549	675.2 to 690.8 feet	Key Note Segment		5 ft	78			
98460	676.3 to 677.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
98521	690.9 to 692.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
98522	697.1 to 698.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
98550	699.1 to 714.3 feet	Key Note Segment		5 ft	76			
98461	707.2 to 708.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
98523	716.1 to 717.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
98524	720.8 to 726.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
98525	727.4 to 730.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
98526	732.7 to 733.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131441	HARVARD AVE	UNIVERSITY AVE	JEFFERSON AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98527	736.5 to 741.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
98551	744.2 to 759.8 feet	Key Note Segment		5 ft	78			
98528	761.7 to 766.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98462	777.5 to 778.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
98463	784.9 to 785.9 feet	**Vertical Change**	-1.71"	5 ft	5	SF	$75	**$375**
98529	787.1 to 793.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
98530	793.8 to 797.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
98464	794.5 to 795.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
98531	798.0 to 807.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
98465	805.2 to 806.2 feet	**Vertical Change**	-.43"	5 ft	5	REF		
98552	808.8 to 822.7 feet	Key Note Segment		5 ft	70			
98532	822.7 to 825.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
98466	823.4 to 824.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
98533	829.0 to 832.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
98553	833.6 to 847.7 feet	Key Note Segment		5 ft	71			
98467	848.7 to 849.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
98534	849.3 to 868.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,400**
98535	868.6 to 885.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
98468	869.4 to 870.4 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E/N/W *side of* **HARVARD AVE** *Starting at:* **UNIVERSITY AVE** **$216,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2201131406	HAYES CT	UNIVERSITY AVE	UNIVERSITY AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98133	2.5 to 3.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
98134	4.9 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
98135	9.2 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
98120	10.1 to 11.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
98136	22.2 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
98137	31.8 to 33.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
98138	36.3 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
98139	49.9 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
98140	58.1 to 66.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,100**
98121	67.2 to 68.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
98141	68.4 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
98122	70.5 to 71.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
98123	75.2 to 76.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
98142	78.8 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
98124	79.9 to 80.9 feet	**Vertical Change**	.48"	5 ft	5	REF		
98143	83.4 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98125	87.2 to 88.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
98144	87.7 to 89.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
98159	90.8 to 112.8 feet	Key Note Segment		5 ft	110			
98126	91.3 to 92.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
98127	102.2 to 103.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
98128	108.2 to 109.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
98129	114.0 to 115.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
98130	121.0 to 122.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
98145	134.0 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
98146	145.4 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
98147	156.8 to 157.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
98160	157.9 to 170.6 feet	Key Note Segment		5 ft	64			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S/E	2201131406	HAYES CT	UNIVERSITY AVE	UNIVERSITY AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98131	158.9 to 159.9 feet	Vertical Change	-.39"	5 ft	5	REF		
98148	174.0 to 192.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
98149	198.3 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
98161	201.6 to 202.8 feet		5.0-6.0%	5 ft	6			
98150	208.4 to 210.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
98151	210.0 to 211.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
98132	216.4 to 217.4 feet	Vertical Change	3.71"	5 ft	5	SF	$75	**$375**
98152	220.3 to 225.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
98153	238.4 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
98154	247.5 to 257.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
98155	261.1 to 273.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
98156	279.5 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
98157	286.3 to 293.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
98158	293.4 to 302.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: W/S/E *side of* **HAYES CT** *Starting at:* **UNIVERSITY AVE** **$92,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201331	HAZEL AVE	HAZEL AVE	LEMON AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105425	1.4 to 2.4 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
105431	9.8 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
105432	19.8 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,280
105426	21.1 to 22.1 feet	Vertical Change	.27"	5 ft	5	REF		
105433	41.3 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
105434	45.7 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
105435	53.4 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	$19,980
105436	88.9 to 90.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
105437	90.0 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	$20,580
105427	94.8 to 95.8 feet	Vertical Change	.34"	5 ft	5	REF		
105438	130.4 to 142.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,960
105439	148.8 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
105440	156.3 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,420
105441	170.8 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
105442	176.7 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
105443	181.6 to 184.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
105444	187.4 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
105428	208.9 to 209.9 feet	Vertical Change	1.91"	5 ft	5	SF	$75	$375
105445	211.7 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
105446	231.0 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
105447	244.5 to 245.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
105448	254.5 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
105429	254.8 to 255.8 feet	Vertical Change	1.98"	5 ft	5	REF		
105456	262.7 to 288.4 feet	Key Note Segment		5 ft	128			
105449	288.7 to 290.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
105450	290.8 to 292.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260
105451	297.3 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
105452	310.1 to 314.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201331	HAZEL AVE	HAZEL AVE	LEMON AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105453	319.8 to 325.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
105454	354.8 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
105430	367.3 to 368.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
105455	375.1 to 378.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: N *side of* **HAZEL AVE** *Starting at:* **HAZEL AVE** **$100,725.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201336	HAZEL AVE	LEMON AVE	RAYMOND THOMAS ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105465	1.7 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
105466	20.5 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
105467	42.5 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
105468	55.3 to 72.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
105469	75.8 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
105470	89.2 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
105471	97.6 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
105472	114.6 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
105457	120.1 to 121.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
105473	132.5 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
105474	148.5 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
105458	151.2 to 152.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
105475	158.5 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
105459	171.7 to 172.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
105476	184.8 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
105460	196.5 to 197.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
105477	215.4 to 223.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
105478	238.0 to 287.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	246	SF	$120	**$29,460**
105479	294.4 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	585	SF	$120	**$70,140**
105461	382.2 to 383.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
105480	415.4 to 418.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
105481	418.8 to 421.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
105462	419.6 to 420.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105482	424.3 to 425.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
105483	425.8 to 427.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
105463	427.8 to 428.8 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
105484	434.7 to 442.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
105485	447.8 to 449.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201336	HAZEL AVE	LEMON AVE	RAYMOND THOMAS ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **HAZEL AVE**	*Starting at:* **LEMON AVE**					**$199,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221047	HAZELNUT DR	1196 HAZELNUT DR	CHERRY TREE DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81053	0.0 to 5.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	26	SF	$120	**$3,120**
81054	5.2 to 11.5 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	32	SF	$120	**$3,780**
81055	16.3 to 20.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
81056	21.9 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
81057	39.8 to 43.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
81058	47.4 to 56.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
81064	56.2 to 76.3 feet	Key Note Segment		5 ft	101			
81046	56.6 to 57.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
81047	73.1 to 74.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
81059	76.8 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
81065	80.5 to 103.4 feet	Key Note Segment		5 ft	115			
81048	100.1 to 101.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
81060	108.0 to 109.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
81061	110.3 to 112.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	13	SF	$120	**$1,560**
81062	113.5 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
81063	122.7 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
81049	124.2 to 125.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
81050	128.1 to 129.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
81051	136.0 to 137.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
81066	137.0 to 159.4 feet	Key Note Segment		5 ft	112			
81052	158.8 to 159.8 feet	**Vertical Change**	-.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HAZELNUT DR** *Starting at:* **1196 HAZELNUT DR** **$42,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221045	HAZELNUT DR	ALMOND AVE	1190 HAZELNUT DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80986	0.0 to 8.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
80987	8.5 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
80988	15.7 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
81027	22.3 to 42.7 feet	Key Note Segment		5 ft	102			
80989	44.2 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
80990	48.1 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
81028	65.3 to 88.3 feet	Key Note Segment		5 ft	115			
80991	88.6 to 91.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
81029	92.6 to 112.8 feet	Key Note Segment		5 ft	101			
80970	109.5 to 110.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
80992	123.0 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
81030	135.1 to 155.0 feet	Key Note Segment		5 ft	100			
80971	135.8 to 136.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
80993	158.6 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
81031	193.8 to 216.1 feet	Key Note Segment		5 ft	112			
80972	199.0 to 200.0 feet	**Vertical Change**	.52"	5 ft	5	REF		
80973	212.7 to 213.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
80994	216.8 to 221.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
81032	221.4 to 241.8 feet	Key Note Segment		5 ft	102			
80995	242.5 to 250.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,620**
80996	253.0 to 272.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
80997	272.3 to 277.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
80974	274.0 to 275.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
80975	276.8 to 277.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
80998	278.0 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
81033	280.9 to 302.8 feet	Key Note Segment		5 ft	110			
80976	292.1 to 293.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
81034	307.8 to 327.6 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221045	HAZELNUT DR	ALMOND AVE	1190 HAZELNUT DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80999	329.3 to 358.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
81000	360.7 to 367.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
80977	361.6 to 362.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
81035	367.5 to 389.6 feet	Key Note Segment		5 ft	111			
80978	389.4 to 390.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
81001	390.3 to 394.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	21	SF	$40	**$840**
81036	394.5 to 414.1 feet	Key Note Segment		5 ft	98			
80979	404.2 to 405.2 feet	**Vertical Change**	.65"	5 ft	5	REF		
80980	413.8 to 414.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		
81002	414.8 to 415.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
81003	415.8 to 426.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
81004	430.3 to 432.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
81005	432.7 to 443.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
81006	443.8 to 450.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
81037	452.9 to 475.8 feet	Key Note Segment		5 ft	115			
80981	457.7 to 458.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
81007	475.9 to 479.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
81038	479.9 to 500.3 feet	Key Note Segment		5 ft	102			
81008	500.6 to 501.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81009	506.4 to 521.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
81010	524.4 to 536.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
81011	537.8 to 539.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
81039	539.6 to 561.6 feet	Key Note Segment		5 ft	110			
81012	561.9 to 583.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	107	SF	$40	**$4,260**
81040	583.2 to 604.8 feet	Key Note Segment		5 ft	108			
80982	584.6 to 585.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
81013	605.3 to 607.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
81014	607.6 to 608.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221045	HAZELNUT DR	ALMOND AVE	1190 HAZELNUT DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81041	608.8 to 630.0 feet	Key Note Segment		5 ft	106			
80983	609.7 to 610.7 feet	Vertical Change	.34"	5 ft	5	REF		
80984	626.6 to 627.6 feet	Vertical Change	.33"	5 ft	5	REF		
81015	631.0 to 632.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
81016	640.7 to 644.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81017	659.2 to 662.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
81018	665.6 to 668.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81042	668.2 to 690.8 feet	Key Note Segment		5 ft	113			
80985	669.7 to 670.7 feet	Vertical Change	.26"	5 ft	5	REF		
81019	691.4 to 693.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$340**
81043	696.1 to 715.2 feet	Key Note Segment		5 ft	96			
81020	717.3 to 748.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,540**
81044	748.2 to 767.6 feet	Key Note Segment		5 ft	97			
81021	767.8 to 770.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	14	SF	$40	**$560**
81022	772.3 to 777.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
81023	777.8 to 784.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
81024	785.6 to 792.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
81025	794.8 to 806.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
81045	806.3 to 829.6 feet	Key Note Segment		5 ft	117			
81026	829.8 to 831.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**

TOTAL COST FOR: W *side of* **HAZELNUT DR** *Starting at:* **ALMOND AVE** **$182,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221132	HAZELNUT DR	PEAR TREE DR	ALMOND AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81549	0.0 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
81550	6.6 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
81551	17.6 to 33.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,420**
81548	20.0 to 21.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
81552	33.8 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81553	37.7 to 42.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
81554	43.6 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
81555	59.8 to 65.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: E *side of* **HAZELNUT DR** *Starting at:* **PEAR TREE DR** **$37,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221131	HAZELNUT LN	1131 HAZELNUT LN	PEAR TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81534	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
81535	2.3 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
81536	20.5 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
81537	38.3 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
81538	45.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
81544	49.5 to 69.9 feet	Key Note Segment		5 ft	102			
81539	71.6 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
81545	78.2 to 98.9 feet	Key Note Segment		5 ft	104			
81530	95.3 to 96.3 feet	**Vertical Change**	.93"	5 ft	5	REF		
81531	97.0 to 98.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
81532	98.9 to 99.9 feet	**Vertical Change**	-.77"	5 ft	5	REF		
81540	99.6 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
81533	105.9 to 106.9 feet	**Vertical Change**	.62"	5 ft	5	REF		
81541	122.8 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
81546	129.8 to 151.0 feet	Key Note Segment		5 ft	106			
81542	152.6 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
81543	157.4 to 170.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
81547	169.2 to 170.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **HAZELNUT LN** *Starting at:* **1131 HAZELNUT LN** **$56,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221129	HAZELNUT LN	CHERRY TREE LN	1137 HAZELNUT LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81483	1.2 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
81468	11.5 to 12.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
81484	11.6 to 20.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
81469	18.4 to 19.4 feet	**Vertical Change**	.74"	5 ft	5	REF		
81518	20.0 to 40.3 feet	Key Note Segment		5 ft	101			
81470	26.6 to 27.6 feet	**Vertical Change**	.63"	5 ft	5	REF		
81471	34.0 to 35.0 feet	**Vertical Change**	1.05"	5 ft	5	REF		
81472	37.1 to 38.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
81485	40.4 to 41.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
81473	42.0 to 43.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
81486	43.3 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
81474	45.4 to 46.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
81487	53.2 to 57.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
81488	57.2 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
81475	57.5 to 58.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
81519	69.1 to 92.4 feet	Key Note Segment		5 ft	117			
81476	92.2 to 93.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
81489	93.8 to 98.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
81520	99.4 to 120.0 feet	Key Note Segment		5 ft	103			
81490	129.4 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
81491	134.2 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
81477	137.4 to 138.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
81478	143.5 to 144.5 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
81492	158.5 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
81521	172.0 to 193.1 feet	Key Note Segment		5 ft	106			
81479	192.7 to 193.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
81522	200.2 to 221.6 feet	Key Note Segment		5 ft	107			
81493	222.2 to 236.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	69	SF	$40	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221129	HAZELNUT LN	CHERRY TREE LN	1137 HAZELNUT LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81494	239.3 to 240.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81495	247.6 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
81496	253.8 to 258.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
81497	262.3 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
81523	273.3 to 293.0 feet	Key Note Segment		5 ft	99			
81498	296.7 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
81499	303.4 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
81500	315.2 to 318.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
81501	319.5 to 325.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
81524	325.4 to 346.1 feet	Key Note Segment		5 ft	104			
81502	347.2 to 349.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
81503	352.4 to 354.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
81525	354.0 to 374.0 feet	Key Note Segment		5 ft	100			
81504	375.1 to 385.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
81505	387.0 to 392.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
81506	394.1 to 402.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
81526	402.8 to 424.0 feet	Key Note Segment		5 ft	106			
81480	423.5 to 424.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
81507	424.8 to 434.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
81508	437.9 to 462.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
81509	462.3 to 476.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
81527	477.8 to 497.8 feet	Key Note Segment		5 ft	100			
81510	498.8 to 500.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
81511	501.3 to 505.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
81528	506.1 to 526.3 feet	Key Note Segment		5 ft	101			
81481	516.4 to 517.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
81512	530.1 to 531.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81513	534.7 to 543.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221129	HAZELNUT LN	CHERRY TREE LN	1137 HAZELNUT LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81514	545.8 to 559.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
81515	562.2 to 567.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
81516	570.3 to 577.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
81517	578.0 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
81529	579.3 to 599.2 feet	Key Note Segment		5 ft	100			
81482	599.2 to 600.2 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **HAZELNUT LN** *Starting at:* **CHERRY TREE LN** **$135,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281553	HELENA WAY	CONCORD AVE	MONTEREY ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113772	0.0 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
113768	20.5 to 21.5 feet	**Vertical Change**	3.12"	5 ft	5	SF	$75	**$375**
113769	41.3 to 42.3 feet	**Vertical Change**	1.16"	5 ft	5	SF	$75	**$375**
113773	42.7 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
113774	46.5 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
113770	63.6 to 64.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
113771	71.0 to 72.0 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
113775	72.4 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
113776	79.7 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
113777	108.3 to 127.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
113778	128.4 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
113779	151.7 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**

TOTAL COST FOR: N *side of* **HELENA WAY** *Starting at:* **CONCORD AVE** **$70,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281557	HELENA WAY	MONTEREY ST	SENECA DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113790	19.3 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
113810	27.7 to 41.9 feet	Key Note Segment		5 ft	71			
113791	41.9 to 49.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
113781	42.5 to 46.5 feet	Vertical Change	.29"	5 ft	20	REF		
113811	51.9 to 66.9 feet	Key Note Segment		5 ft	75			
113792	67.9 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,340**
113793	79.0 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
113794	85.8 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
113795	95.8 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
113782	96.5 to 97.5 feet	Vertical Change	-.34"	5 ft	5	REF		
113812	101.0 to 115.2 feet	Key Note Segment		5 ft	71			
113783	102.2 to 103.2 feet	Vertical Change	-.31"	5 ft	5	REF		
113796	116.1 to 127.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
113797	128.6 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
113813	150.6 to 163.5 feet	Key Note Segment		5 ft	65			
113784	151.2 to 152.2 feet	Vertical Change	-.59"	5 ft	5	REF		
113798	164.6 to 165.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
113799	165.6 to 177.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
113785	178.3 to 179.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
113800	194.3 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
113814	198.0 to 212.6 feet	Key Note Segment		5 ft	73			
113801	220.3 to 223.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
113802	226.6 to 229.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
113803	235.2 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
113804	257.7 to 267.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
113815	269.3 to 283.3 feet	Key Note Segment		5 ft	70			
113786	277.7 to 278.7 feet	Vertical Change	.43"	5 ft	5	REF		
113805	284.2 to 286.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281557	HELENA WAY	MONTEREY ST	SENECA DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113806	288.2 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
113816	294.3 to 308.0 feet	Key Note Segment		5 ft	69			
113807	308.8 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
113787	308.9 to 309.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
113788	316.3 to 317.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
113817	343.6 to 364.7 feet	Key Note Segment		5 ft	106			
113789	344.8 to 345.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
113808	378.3 to 379.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
113809	392.1 to 394.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **HELENA WAY** *Starting at:* **MONTEREY ST** **$71,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281551	HELENA WAY	SENECA DR	CONCORD AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113754	0.7 to 6.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
113755	8.3 to 20.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
113756	20.3 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
113757	28.5 to 38.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
113758	39.3 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
113759	59.8 to 62.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
113760	62.5 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
113753	63.5 to 64.5 feet	**Vertical Change**	.57"	5 ft	5	REF		
113761	67.7 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
113762	78.1 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
113763	106.5 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
113764	120.3 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
113765	132.1 to 133.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
113766	136.0 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
113767	150.3 to 154.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **HELENA WAY** *Starting at:* **SENECA DR** **$79,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281016	HICKORY AVE	1460 HICKORY AVE	1498 HICKORY AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111855	0.3 to 19.3 feet	Key Note Segment		5 ft	95			
111841	1.4 to 2.4 feet	Vertical Change	.63"	5 ft	5	REF		
111842	12.8 to 13.8 feet	Vertical Change	1.14"	5 ft	5	REF		
111848	21.5 to 30.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
111843	28.2 to 29.2 feet	Vertical Change	-.26"	5 ft	5	REF		
111849	31.4 to 32.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
111850	35.3 to 43.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
111844	36.6 to 37.6 feet	Vertical Change	.54"	5 ft	5	REF		
111856	44.4 to 63.3 feet	Key Note Segment		5 ft	95			
111845	63.5 to 64.5 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
111857	63.5 to 64.6 feet		5.0-6.0%	5 ft	5			
111851	67.5 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
111852	69.1 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
111846	72.9 to 73.9 feet	Vertical Change	.28"	5 ft	5	REF		
111853	85.3 to 89.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
111854	92.3 to 94.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
111847	93.1 to 94.1 feet	Vertical Change	.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HICKORY AVE** *Starting at:* **1460 HICKORY AVE** **$25,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281019	HICKORY AVE	1498 HICKORY AVE	MACADAMIA AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111867	0.8 to 2.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
111868	4.8 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
111859	8.0 to 9.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
111869	24.6 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
111870	29.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
111891	32.8 to 58.3 feet	Key Note Segment		5 ft	128			
111860	33.5 to 34.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
111871	60.9 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
111872	67.0 to 85.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
111861	72.3 to 73.3 feet	**Vertical Change**	.81"	5 ft	5	REF		
111873	89.0 to 91.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
111874	93.5 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
111875	96.4 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
111862	99.5 to 100.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
111876	103.3 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
111877	108.4 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
111892	117.7 to 136.3 feet	Key Note Segment		5 ft	93			
111863	121.7 to 122.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
111864	131.3 to 132.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
111878	139.0 to 143.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111865	140.9 to 141.9 feet	**Vertical Change**	1.15"	5 ft	5	REF		
111893	143.9 to 162.8 feet	Key Note Segment		5 ft	95			
111879	164.2 to 168.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
111880	168.9 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
111881	198.7 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
111882	226.8 to 228.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
111894	230.4 to 250.5 feet	Key Note Segment		5 ft	101			
111883	252.8 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281019	HICKORY AVE	1498 HICKORY AVE	MACADAMIA AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111895	257.8 to 277.7 feet	Key Note Segment		5 ft	100			
111884	281.7 to 294.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
111885	296.7 to 320.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
111886	324.3 to 328.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
111887	331.2 to 344.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
111866	340.8 to 341.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
111896	344.2 to 364.2 feet	Key Note Segment		5 ft	100			
111888	365.8 to 367.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
111889	368.8 to 371.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
111897	371.2 to 397.3 feet	Key Note Segment		5 ft	131			
111890	398.8 to 410.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: E *side of* **HICKORY AVE** *Starting at:* **1498 HICKORY AVE** **$118,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281014	HICKORY AVE	CHESTNUT AVE	1460 HICKORY AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111832	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
111833	2.6 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
111834	22.2 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
111830	25.7 to 26.7 feet	**Vertical Change**	.5"	5 ft	5	REF		
111835	31.3 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
111836	51.6 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111837	64.4 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
111838	73.4 to 75.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
111839	78.9 to 95.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,140**
111840	98.1 to 100.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: W *side of* **HICKORY AVE** *Starting at:* **CHESTNUT AVE** **$31,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281021	HICKORY AVE	MACADAMIA AVE	CHESTNUT AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111898	1.2 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111899	4.8 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
111900	32.7 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
111901	38.0 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	190	SF	$120	**$22,740**
111902	77.9 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
111903	104.2 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
111904	115.2 to 118.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
111905	121.6 to 138.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**

TOTAL COST FOR: W *side of* **HICKORY AVE** *Starting at:* **MACADAMIA AVE** **$69,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100938	HIGH ST	5TH ST	217 HIGH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55252	1.5 to 4.6 feet	Vertical Change	-.28"	5 ft	15	LF	$75	$1,163
55258	2.7 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
55253	6.3 to 7.3 feet	Vertical Change	.31"	5 ft	5	REF		
55259	10.8 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
55260	23.4 to 28.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
55261	32.7 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
55262	36.3 to 42.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,540
55263	42.2 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
55264	53.3 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
55254	61.2 to 62.2 feet	Vertical Change	.41"	5 ft	5	REF		
55265	64.7 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,380
55255	82.7 to 83.7 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
55266	84.6 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
55279	94.3 to 117.5 feet	Key Note Segment		5 ft	116			
55267	118.6 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
55268	128.7 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
55269	134.4 to 139.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
55270	146.4 to 150.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
55271	153.0 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	$10,920
55272	173.8 to 180.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,720
55273	181.0 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
55256	186.7 to 187.7 feet	Vertical Change	2.93"	5 ft	5	REF		
55274	194.8 to 205.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,180
55275	208.4 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	$14,580
55276	236.3 to 274.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	$22,740
55257	261.5 to 262.5 feet	Vertical Change	-.5"	5 ft	5	REF		
55277	277.7 to 278.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
55278	285.5 to 287.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100938	HIGH ST	5TH ST	217 HIGH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **HIGH ST** *Starting at:* **5TH ST**								**$109,717.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100909	HIGH ST	5TH ST	E YOSEMITE AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55134	20.5 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55135	24.0 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
55128	34.9 to 35.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
55142	46.7 to 57.4 feet	Key Note Segment		5 ft	54			
55136	57.4 to 60.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
55137	88.6 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
55129	102.3 to 103.3 feet	**Vertical Change**	2.97"	5 ft	5	REF		
55143	108.8 to 119.2 feet	Key Note Segment		5 ft	52			
55130	109.1 to 110.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
55138	178.3 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
55139	188.3 to 190.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
55140	194.2 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
55144	196.0 to 220.4 feet	Key Note Segment		5 ft	122			
55131	223.2 to 224.2 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
55141	237.7 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
55132	257.5 to 258.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
55133	274.7 to 275.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
55145	296.8 to 297.8 feet		5.0-6.0%	5 ft	5			
55146	298.3 to 300.5 feet		6.0-7.0%	5 ft	11			
55147	298.3 to 300.5 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: SW *side of* **HIGH ST** *Starting at:* **5TH ST** **$20,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100913	HIGH ST	E YOSEMITE AVE	5TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55164	7.3 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
55148	10.7 to 11.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
55149	17.2 to 18.2 feet	**Vertical Change**	-.56"	5 ft	5	REF		
55165	19.2 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
55166	29.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
55150	48.1 to 51.2 feet	**Vertical Change**	.93"	5 ft	16	SF	$75	**$1,163**
55151	55.6 to 56.6 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
55152	57.9 to 58.9 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
55153	60.7 to 61.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
55167	61.5 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
55154	65.0 to 66.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
55155	66.7 to 67.7 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
55156	68.6 to 72.0 feet	**Vertical Change**	.3"	5 ft	17	REF		
55168	70.5 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
55169	72.6 to 75.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
55157	77.2 to 78.2 feet	**Vertical Change**	-1.08"	5 ft	5	REF		
55170	77.6 to 78.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
55158	80.2 to 81.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
55171	83.0 to 84.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
55159	85.5 to 86.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
55160	90.1 to 91.1 feet	**Vertical Change**	.57"	5 ft	5	REF		
55172	90.4 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55173	95.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
55174	108.1 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
55186	140.0 to 168.4 feet	Key Note Segment		5 ft	142			
55161	170.0 to 173.0 feet	**Vertical Change**	.29"	5 ft	15	LF	$75	**$1,125**
55175	181.2 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55176	191.6 to 193.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100913	HIGH ST	E YOSEMITE AVE	5TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55177	195.0 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
55178	213.4 to 216.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
55179	217.6 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
55162	228.4 to 229.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
55180	231.0 to 237.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
55181	240.7 to 242.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
55182	246.1 to 264.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
55183	267.8 to 272.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
55184	273.2 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
55163	273.4 to 274.4 feet	**Vertical Change**	-.44"	5 ft	5	REF		
55185	284.3 to 296.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,260**

TOTAL COST FOR: NE *side of* **HIGH ST** *Starting at:* **E YOSEMITE AVE** **$92,242.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100942	HIGH ST	STREET END	5TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55288	0.0 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
55289	7.9 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55290	12.7 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
55280	15.6 to 16.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
55307	48.6 to 79.9 feet	Key Note Segment		5 ft	157			
55281	62.6 to 63.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
55291	81.8 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
55282	85.7 to 86.7 feet	**Vertical Change**	2.79"	5 ft	5	REF		
55292	94.8 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
55293	100.9 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	277	SF	$120	**$33,240**
55283	124.9 to 125.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
55294	158.7 to 161.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
55295	162.3 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
55296	166.9 to 189.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,500**
55284	169.2 to 170.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
55297	192.4 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
55298	203.6 to 217.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
55285	210.7 to 211.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
55299	217.8 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
55300	237.8 to 243.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
55301	245.9 to 254.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
55302	256.3 to 268.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,260**
55303	269.1 to 271.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
55304	273.7 to 274.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
55305	274.7 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
55286	275.3 to 276.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
55287	286.0 to 287.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
55306	287.4 to 292.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100942	HIGH ST	STREET END	5TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW	*side of* **HIGH ST**	*Starting at:* **STREET END**						**$128,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112161413	HILLCREST CT	WOODLANDS DR	WOODLANDS DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86955	6.3 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
86956	10.8 to 34.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
86943	26.3 to 27.3 feet	**Vertical Change**	.53"	5 ft	5	REF		
86981	36.8 to 62.9 feet	Key Note Segment		5 ft	131			
86944	37.8 to 38.8 feet	**Vertical Change**	-.59"	5 ft	5	REF		
86945	43.3 to 44.3 feet	**Vertical Change**	2.88"	5 ft	5	REF		
86957	66.8 to 79.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
86958	79.3 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86959	85.2 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
86982	101.0 to 129.0 feet	Key Note Segment		5 ft	140			
86960	129.0 to 141.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	65	SF	$40	**$2,580**
86946	132.8 to 133.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
86983	143.1 to 166.3 feet	Key Note Segment		5 ft	116			
86947	151.6 to 152.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
86948	159.5 to 160.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
86961	168.6 to 170.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
86962	175.8 to 179.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
86963	179.5 to 196.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
86984	198.4 to 223.8 feet	Key Note Segment		5 ft	127			
86964	225.6 to 226.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86965	229.2 to 236.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
86950	234.9 to 235.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
86985	249.3 to 273.5 feet	Key Note Segment		5 ft	121			
86966	273.8 to 274.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$220**
86967	282.6 to 283.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
86968	283.8 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
86986	288.7 to 314.0 feet	Key Note Segment		5 ft	127			
86951	313.3 to 314.3 feet	**Vertical Change**	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112161413	HILLCREST CT	WOODLANDS DR	WOODLANDS DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86969	314.5 to 318.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	$840
86970	318.7 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$11,040
86952	320.3 to 321.3 feet	Vertical Change	.35"	5 ft	5	REF		
86953	339.6 to 340.6 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
86971	341.3 to 344.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
86987	346.8 to 374.1 feet	Key Note Segment		5 ft	137			
86972	375.3 to 387.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	$7,260
86973	391.0 to 392.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
86954	392.6 to 393.6 feet	Vertical Change	-.34"	5 ft	5	REF		
86974	395.8 to 398.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,500
86975	401.7 to 405.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
86976	406.3 to 413.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
86988	415.3 to 447.8 feet	Key Note Segment		5 ft	163			
86977	448.8 to 451.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
86989	452.8 to 484.9 feet	Key Note Segment		5 ft	161			
86978	486.6 to 488.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
86979	490.8 to 504.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
86980	504.8 to 510.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	$3,600
86990	508.8 to 511.5 feet		5.0-6.0%	5 ft	14			
86991	508.8 to 511.5 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	$1,620

TOTAL COST FOR: N/W/S *side of* **HILLCREST CT** *Starting at:* **WOODLANDS DR** **$105,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112161444	HILLCREST CT	WOODLANDS DR	WOODLANDS DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87316	0.0 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
87317	6.2 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
87318	21.0 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
87319	25.6 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
87300	37.0 to 38.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
87301	45.7 to 46.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
87320	46.3 to 61.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
87321	61.4 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87342	65.0 to 95.8 feet	Key Note Segment		5 ft	154			
87302	95.7 to 96.7 feet	**Vertical Change**	-.59"	5 ft	5	REF		
87322	97.8 to 109.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
87323	111.9 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
87303	116.8 to 117.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
87324	117.4 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
87343	129.3 to 160.2 feet	Key Note Segment		5 ft	154			
87304	130.5 to 131.5 feet	**Vertical Change**	1.15"	5 ft	5	REF		
87305	160.3 to 161.3 feet	**Vertical Change**	.59"	5 ft	5	REF		
87325	162.0 to 177.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
87326	178.6 to 185.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
87327	188.6 to 189.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87344	191.8 to 217.6 feet	Key Note Segment		5 ft	129			
87328	218.6 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
87329	227.1 to 231.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
87345	231.8 to 257.9 feet	Key Note Segment		5 ft	130			
87306	245.1 to 246.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
87330	258.8 to 261.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
87331	261.5 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
87346	276.1 to 300.7 feet	Key Note Segment		5 ft	123			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112161444	HILLCREST CT	WOODLANDS DR	WOODLANDS DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87307	298.0 to 299.0 feet	Vertical Change	-.32"	5 ft	5	REF		
87332	301.0 to 302.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$240
87333	317.9 to 338.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,480
87334	338.8 to 340.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
87335	343.0 to 344.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
87336	346.7 to 354.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,620
87347	354.4 to 383.6 feet	Key Note Segment		5 ft	146			
87308	370.9 to 371.9 feet	Vertical Change	.26"	5 ft	5	REF		
87309	386.8 to 387.8 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
87348	396.0 to 426.6 feet	Key Note Segment		5 ft	153			
87310	426.7 to 427.7 feet	Vertical Change	.37"	5 ft	5	REF		
87337	431.2 to 432.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
87338	432.9 to 453.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,360
87311	454.0 to 455.0 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
87339	455.6 to 457.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
87349	457.1 to 489.1 feet	Key Note Segment		5 ft	160			
87312	469.4 to 470.4 feet	Vertical Change	.45"	5 ft	5	REF		
87314	488.9 to 489.9 feet	Vertical Change	-.29"	5 ft	5	REF		
87340	489.8 to 495.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
87315	496.5 to 497.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
87341	498.7 to 511.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	$7,860
87350	509.6 to 510.7 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: S/E/N *side of* **HILLCREST CT** *Starting at:* **WOODLANDS DR** **$126,945.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261444	HILLSBORO AVE	FAIRFIELD WAY	HAMPTON DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109806	3.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
109807	7.8 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109808	11.9 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
109809	19.7 to 29.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
109791	30.6 to 31.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109822	30.7 to 58.4 feet	Key Note Segment		5 ft	139			
109792	40.3 to 41.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
109793	56.7 to 57.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
109794	60.7 to 61.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
109810	62.1 to 65.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
109795	64.0 to 65.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
109823	67.6 to 94.0 feet	Key Note Segment		5 ft	132			
109796	93.3 to 94.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
109811	96.3 to 98.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
109812	101.3 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
109813	109.0 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
109797	123.1 to 124.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109814	126.8 to 135.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
109798	133.1 to 134.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
109815	136.2 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
109824	138.8 to 167.8 feet	Key Note Segment		5 ft	145			
109799	142.0 to 143.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
109800	165.7 to 166.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
109801	169.2 to 170.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
109816	169.5 to 186.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
109802	187.5 to 188.5 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
109817	188.8 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
109826	195.1 to 196.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261444	HILLSBORO AVE	FAIRFIELD WAY	HAMPTON DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109818	195.5 to 197.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
109819	205.5 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
109820	213.5 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
109825	237.8 to 266.2 feet	Key Note Segment		5 ft	142			
109803	238.3 to 242.0 feet	**Vertical Change**	.31"	5 ft	19	REF		
109804	264.8 to 265.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109821	267.7 to 312.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	223	SF	$120	**$26,760**
109805	308.2 to 309.2 feet	**Vertical Change**	3.53"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HILLSBORO AVE** *Starting at:* **FAIRFIELD WAY** **$90,204.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271133	HILLSBORO AVE	FAIRWAY AVE	MATEO WAY	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110857	0.0 to 7.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
110858	8.8 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
110855	22.5 to 23.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
110859	26.3 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
110860	33.1 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
110861	40.7 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
110862	47.0 to 72.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
110863	74.6 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
110864	91.8 to 98.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
110856	99.1 to 100.1 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
110865	100.6 to 118.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
110866	123.3 to 124.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
110867	127.0 to 128.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
110868	131.2 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
110869	146.8 to 152.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,660**

TOTAL COST FOR: W *side of* **HILLSBORO AVE** *Starting at:* **FAIRWAY AVE** **$77,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271139	HILLSBORO AVE	GLADE AVE	GLENVILLE AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110875	0.0 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
110876	9.3 to 63.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	272	SF	$120	**$32,640**
110870	9.4 to 10.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110871	19.3 to 20.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
110872	31.9 to 32.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
110877	64.3 to 124.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	300	SF	$120	**$35,940**
110873	123.0 to 124.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
110878	126.3 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
110879	152.0 to 156.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
110880	159.6 to 162.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
110874	163.5 to 164.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **HILLSBORO AVE** *Starting at:* **GLADE AVE** **$92,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271059	HILLSBORO AVE	GLENVILLE AVE	FAIRWAY AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110565	0.0 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
110566	11.8 to 17.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
110567	18.4 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
110568	22.5 to 28.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
110569	30.5 to 47.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
110570	49.8 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$24,000**
110571	92.8 to 93.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
110572	93.9 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
110573	101.6 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
110574	112.3 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
110575	125.7 to 163.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	191	SF	$120	**$22,860**
110564	163.8 to 164.8 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HILLSBORO AVE** *Starting at:* **GLENVILLE AVE** **$85,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261440	HILLSBORO AVE	HAMPTON DR	FAIRFIELD WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109772	3.3 to 8.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
109787	8.7 to 41.3 feet	Key Note Segment		5 ft	163			
109764	39.9 to 40.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
109773	43.2 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
109765	45.4 to 46.4 feet	**Vertical Change**	1.63"	5 ft	5	REF		
109774	69.6 to 89.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
109766	77.3 to 78.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
109775	94.0 to 98.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
109767	97.6 to 98.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109776	100.9 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
109777	108.3 to 116.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
109778	116.2 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
109779	127.0 to 131.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
109788	133.2 to 162.0 feet	Key Note Segment		5 ft	144			
109780	167.8 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
109789	170.3 to 199.8 feet	Key Note Segment		5 ft	148			
109768	173.1 to 174.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
109769	181.3 to 182.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
109781	203.3 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
109782	211.0 to 227.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
109783	229.8 to 263.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	168	SF	$120	**$20,100**
109770	253.1 to 254.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
109790	264.2 to 304.8 feet	Key Note Segment		5 ft	203			
109784	308.8 to 316.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
109785	320.9 to 354.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
109786	355.2 to 368.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
109771	368.1 to 369.1 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **HILLSBORO AVE** *Starting at:* **HAMPTON DR** **$116,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271121	HILLSBORO AVE	MATEO WAY	FAIRFIELD WAY	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110769	0.4 to 7.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
110770	8.6 to 15.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
110765	9.1 to 10.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
110766	15.0 to 16.0 feet	**Vertical Change**	.78"	5 ft	5	REF		
110771	15.7 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
110772	18.5 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
110767	32.1 to 33.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
110773	47.3 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110774	54.6 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
110775	91.5 to 109.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$11,040**
110776	109.9 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
110777	120.3 to 140.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
110778	149.1 to 154.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
110768	149.8 to 150.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
110779	154.1 to 161.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: W *side of* **HILLSBORO AVE** *Starting at:* **MATEO WAY** **$85,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109151048	HILLSBORO AVE	PAMELA DR	GLADE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67961	0.0 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
67962	8.3 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
67963	19.0 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
67964	23.7 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
68005	25.4 to 53.8 feet	Key Note Segment		5 ft	142			
67965	56.9 to 58.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
67966	59.3 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
67944	64.5 to 65.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
67967	64.8 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
67968	68.6 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
68006	73.8 to 100.3 feet	Key Note Segment		5 ft	133			
67945	92.2 to 93.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
67946	99.1 to 100.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
67969	102.8 to 103.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67970	109.6 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
67971	125.5 to 160.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	174	SF	$120	**$20,880**
67972	166.0 to 171.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
68007	171.8 to 199.1 feet	Key Note Segment		5 ft	137			
67947	200.8 to 201.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
67973	203.0 to 211.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
67974	212.6 to 242.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
67948	235.7 to 236.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
68008	243.3 to 270.9 feet	Key Note Segment		5 ft	138			
67975	273.8 to 280.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
67949	277.5 to 278.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
68009	280.3 to 310.8 feet	Key Note Segment		5 ft	153			
67976	313.5 to 344.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	153	SF	$120	**$18,300**
67977	346.9 to 358.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109151048	HILLSBORO AVE	PAMELA DR	GLADE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68010	358.2 to 386.7 feet	Key Note Segment		5 ft	143			
67978	390.4 to 398.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
67979	401.0 to 406.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
67980	406.8 to 412.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
67981	423.5 to 447.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
67982	452.0 to 453.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68011	454.8 to 483.3 feet	Key Note Segment		5 ft	143			
67950	482.9 to 483.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
67983	489.8 to 493.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
67984	496.4 to 500.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
68012	500.8 to 536.5 feet	Key Note Segment		5 ft	179			
67985	539.9 to 541.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
67986	541.4 to 560.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
67987	563.2 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
67952	565.1 to 566.1 feet	**Vertical Change**	-.54"	5 ft	5	REF		
67988	575.9 to 594.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
68013	596.6 to 624.8 feet	Key Note Segment		5 ft	141			
67953	606.5 to 607.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
67954	625.1 to 626.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
67989	626.2 to 630.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
67990	631.7 to 633.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67955	634.8 to 635.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
67991	636.1 to 644.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
68014	649.5 to 671.5 feet	Key Note Segment		5 ft	110			
67956	655.3 to 656.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
67957	663.1 to 664.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
67958	671.0 to 672.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
67992	673.4 to 674.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109151048	HILLSBORO AVE	PAMELA DR	GLADE AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67993	676.9 to 678.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
67959	680.0 to 681.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
67994	682.0 to 704.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
67995	706.9 to 723.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
67996	727.3 to 740.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
68015	740.2 to 767.5 feet	Key Note Segment		5 ft	137			
67960	771.2 to 772.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
67997	773.3 to 779.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
67998	783.3 to 786.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
67999	786.6 to 791.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
68000	793.7 to 801.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
68001	802.8 to 808.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
68002	809.2 to 817.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
68003	821.6 to 824.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
68004	828.7 to 849.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**

TOTAL COST FOR: E *side of* **HILLSBORO AVE** *Starting at:* **PAMELA DR** **$244,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111605	HOLIDAY CT	VALLEY WAY	VALLEY WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93169	0.1 to 6.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
93170	7.6 to 13.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,540**
93171	16.1 to 17.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$780**
93172	17.8 to 18.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
93173	20.5 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
93174	23.2 to 27.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
93175	29.5 to 32.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
93176	35.1 to 42.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	38	SF	$120	**$4,500**
93161	46.9 to 47.9 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
93177	48.6 to 60.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
93195	51.5 to 52.8 feet		5.0-6.0%	5 ft	7			
93178	62.3 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
93191	69.0 to 94.3 feet	Key Note Segment		5 ft	127			
93192	99.5 to 115.3 feet	Key Note Segment		5 ft	79			
93162	100.2 to 101.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
93163	113.8 to 114.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
93179	118.5 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
93180	131.4 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
93181	135.8 to 141.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
93182	141.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93164	143.1 to 144.1 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
93193	145.0 to 161.8 feet	Key Note Segment		5 ft	84			
93183	174.1 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
93184	187.1 to 188.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
93196	187.1 to 188.3 feet		5.0-6.0%	5 ft	6			
93165	188.5 to 189.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
93185	189.1 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
93194	191.7 to 213.5 feet	Key Note Segment		5 ft	109			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111605	HOLIDAY CT	VALLEY WAY	VALLEY WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93166	212.0 to 213.0 feet	Vertical Change	.3"	5 ft	5	REF		
93167	216.4 to 217.4 feet	Vertical Change	1.26"	5 ft	5	SF	$75	$375
93186	221.3 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
93187	229.9 to 241.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
93188	242.1 to 251.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
93189	251.0 to 275.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	$14,580
93168	251.5 to 252.5 feet	Vertical Change	.29"	5 ft	5	REF		
93190	278.2 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760

TOTAL COST FOR: S/E/N *side of* **HOLIDAY CT** *Starting at:* **VALLEY WAY** **$77,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261422	HOLLOW AVE	N WESTBERRY BLV	TIBURON WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109655	0.8 to 5.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
109656	6.1 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
109657	22.8 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,500**
109635	27.5 to 28.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
109669	35.3 to 66.3 feet	Key Note Segment		5 ft	155			
109636	35.8 to 36.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
109637	38.4 to 39.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109638	44.7 to 45.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109639	56.9 to 57.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
109640	66.1 to 67.1 feet	**Vertical Change**	-.46"	5 ft	5	REF		
109658	68.7 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
109670	77.8 to 107.7 feet	Key Note Segment		5 ft	150			
109641	95.8 to 96.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
109659	109.7 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,160**
109660	145.8 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
109671	153.8 to 183.3 feet	Key Note Segment		5 ft	147			
109642	183.8 to 187.0 feet	**Vertical Change**	.27"	5 ft	16	LF	$75	**$1,200**
109661	186.1 to 220.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	174	SF	$120	**$20,820**
109643	196.8 to 197.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109662	220.8 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
109672	228.3 to 257.6 feet	Key Note Segment		5 ft	147			
109644	229.2 to 230.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
109645	247.7 to 248.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109646	255.9 to 256.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109663	258.8 to 292.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	170	SF	$120	**$20,460**
109664	293.2 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
109647	301.7 to 302.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
109673	304.6 to 333.9 feet	Key Note Segment		5 ft	146			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261422	HOLLOW AVE	N WESTBERRY BLV	TIBURON WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109648	308.0 to 309.0 feet	Vertical Change	.26"	5 ft	5	REF		
109649	314.9 to 315.9 feet	Vertical Change	-.28"	5 ft	5	REF		
109650	323.7 to 324.7 feet	Vertical Change	.28"	5 ft	5	REF		
109651	332.3 to 333.3 feet	Vertical Change	.41"	5 ft	5	REF		
109665	337.7 to 345.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
109666	347.8 to 367.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
109667	367.6 to 380.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
109652	377.1 to 378.1 feet	Vertical Change	.47"	5 ft	5	REF		
109674	380.2 to 408.8 feet	Key Note Segment		5 ft	143			
109653	390.3 to 391.3 feet	Vertical Change	-.3"	5 ft	5	REF		
109668	410.4 to 444.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	170	SF	$120	**$20,400**

TOTAL COST FOR: S *side of* **HOLLOW AVE** *Starting at:* **N WESTBERRY BLV** **$147,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261418	HOLLOW AVE	TIBURON WAY	N WESTBERRY BLV	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109609	0.0 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
109588	6.7 to 7.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
109628	17.3 to 44.4 feet	Key Note Segment		5 ft	136			
109589	41.4 to 42.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109590	44.1 to 45.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
109610	45.2 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,460**
109591	53.5 to 54.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
109629	70.3 to 98.9 feet	Key Note Segment		5 ft	143			
109592	97.1 to 100.6 feet	**Vertical Change**	.26"	5 ft	18	REF		
109611	100.5 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
109612	116.7 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
109593	117.8 to 118.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
109613	131.4 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
109614	152.3 to 169.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
109594	157.0 to 158.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
109615	169.3 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
109630	174.3 to 203.1 feet	Key Note Segment		5 ft	144			
109616	206.4 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
109595	209.7 to 210.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
109596	217.2 to 218.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
109617	219.6 to 254.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	173	SF	$120	**$20,760**
109597	249.6 to 250.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
109631	254.2 to 284.9 feet	Key Note Segment		5 ft	153			
109598	255.2 to 256.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
109599	282.7 to 283.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
109618	285.8 to 294.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
109600	293.0 to 294.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
109632	294.8 to 309.9 feet	Key Note Segment		5 ft	75			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261418	HOLLOW AVE	TIBURON WAY	N WESTBERRY BLV	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109601	307.9 to 308.9 feet	Vertical Change	.27"	5 ft	5	REF		
109619	311.7 to 312.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
109620	314.3 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
109621	323.2 to 334.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
109602	328.6 to 329.6 feet	Vertical Change	.31"	5 ft	5	REF		
109633	335.4 to 363.9 feet	Key Note Segment		5 ft	143			
109603	346.4 to 347.4 feet	Vertical Change	.32"	5 ft	5	REF		
109604	362.1 to 363.1 feet	Vertical Change	.43"	5 ft	5	REF		
109622	373.3 to 380.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
109634	381.0 to 409.9 feet	Key Note Segment		5 ft	145			
109605	382.4 to 383.4 feet	Vertical Change	-.31"	5 ft	5	REF		
109606	384.1 to 385.1 feet	Vertical Change	.28"	5 ft	5	REF		
109607	392.4 to 393.4 feet	Vertical Change	-.38"	5 ft	5	REF		
109608	408.0 to 409.0 feet	Vertical Change	.35"	5 ft	5	REF		
109623	410.7 to 414.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
109624	415.0 to 421.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
109625	425.0 to 429.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
109626	430.6 to 432.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
109627	434.5 to 445.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**

TOTAL COST FOR: N *side of* **HOLLOW AVE** *Starting at:* **TIBURON WAY** **$129,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081227	HOOVER AVE	1773 HOOVER AVE	MADISON DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126410	1.9 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
126429	6.5 to 24.0 feet	Key Note Segment		5 ft	88			
126411	26.5 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
126401	31.4 to 32.4 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
126430	32.2 to 49.3 feet	Key Note Segment		5 ft	85			
126402	43.9 to 44.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
126403	50.2 to 51.2 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
126412	53.7 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
126404	66.3 to 67.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126413	73.3 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
126414	84.7 to 87.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
126415	91.1 to 108.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
126431	109.7 to 127.8 feet	Key Note Segment		5 ft	91			
126436	130.3 to 131.3 feet		5.0-6.0%	5 ft	5			
126416	131.7 to 134.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
126405	133.2 to 134.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126432	136.0 to 152.8 feet	Key Note Segment		5 ft	84			
126406	147.7 to 148.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
126417	155.8 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
126418	168.3 to 176.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
126419	179.3 to 183.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
126420	184.9 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
126421	196.5 to 204.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
126422	206.2 to 211.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
126433	211.6 to 230.6 feet	Key Note Segment		5 ft	95			
126423	234.7 to 236.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
126434	237.5 to 256.6 feet	Key Note Segment		5 ft	96			
126424	259.9 to 274.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081227	HOOVER AVE	1773 HOOVER AVE	MADISON DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126425	275.9 to 277.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
126426	279.5 to 288.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
126435	288.3 to 307.7 feet	Key Note Segment		5 ft	97			
126407	288.8 to 289.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
126409	308.1 to 309.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
126427	313.6 to 326.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
126428	330.9 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **HOOVER AVE** *Starting at:* **1773 HOOVER AVE** **$91,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081252	HOOVER AVE	COOLIDGE ST	TRUMAN DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126680	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
126671	6.4 to 7.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
126681	8.8 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
126672	15.1 to 16.1 feet	**Vertical Change**	-1.08"	5 ft	5	REF		
126682	15.5 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
126673	23.7 to 24.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
126683	33.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
126674	41.2 to 42.2 feet	**Vertical Change**	-.46"	5 ft	5	REF		
126684	53.0 to 57.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
126685	57.8 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
126675	58.5 to 59.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
126676	80.1 to 81.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
126686	80.7 to 91.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
126677	93.2 to 94.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
126687	94.7 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
126678	101.7 to 102.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
126688	107.9 to 154.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	231	SF	$120	**$27,720**
126679	119.2 to 120.2 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **HOOVER AVE** *Starting at:* **COOLIDGE ST** **$75,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081229	HOOVER AVE	MADISON DR	MONROE AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126437	4.0 to 5.0 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
126443	10.5 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
126444	11.5 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
126445	23.2 to 25.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,560
126446	29.3 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
126447	32.5 to 41.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
126448	44.8 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	171	SF	$120	$20,520
126438	59.2 to 60.2 feet	Vertical Change	.27"	5 ft	5	REF		
126439	63.1 to 64.1 feet	Vertical Change	1.94"	5 ft	5	REF		
126449	79.0 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	$18,300
126440	102.6 to 103.6 feet	Vertical Change	.31"	5 ft	5	REF		
126450	110.4 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
126441	111.3 to 112.3 feet	Vertical Change	.28"	5 ft	5	REF		
126442	120.0 to 121.0 feet	Vertical Change	.39"	5 ft	5	REF		
126451	120.2 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
126452	126.1 to 129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,920
126453	131.9 to 133.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
126454	135.8 to 137.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,140
126455	137.7 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
126456	148.4 to 149.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
126457	149.8 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920

TOTAL COST FOR: S *side of* **HOOVER AVE** *Starting at:* **MADISON DR** **$73,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081240	HOOVER AVE	MONROE AVE	COOLIDGE ST	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126555	1.1 to 2.1 feet	Vertical Change	.42"	5 ft	5	REF		
126559	1.3 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
126560	2.3 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,840
126556	9.6 to 10.6 feet	Vertical Change	.38"	5 ft	5	REF		
126561	19.7 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
126562	23.1 to 30.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
126563	30.7 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
126564	37.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	$15,600
126565	69.3 to 79.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,060
126566	81.8 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
126567	87.5 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	$16,620
126568	117.7 to 135.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	$10,740
126569	139.8 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
126558	150.9 to 151.9 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375

TOTAL COST FOR: S *side of* **HOOVER AVE** *Starting at:* **MONROE AVE** **$76,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081224	HOOVER AVE	TRUMAN DR	1847 HOOVER AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126378	0.0 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
126395	4.4 to 19.2 feet	Key Note Segment		5 ft	74			
126379	20.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
126380	24.8 to 28.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
126396	29.0 to 42.4 feet	Key Note Segment		5 ft	67			
126381	42.8 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
126368	81.3 to 82.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126382	84.8 to 105.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
126369	89.7 to 90.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
126370	106.4 to 107.4 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
126397	106.5 to 124.9 feet	Key Note Segment		5 ft	92			
126383	130.0 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
126398	131.8 to 149.8 feet	Key Note Segment		5 ft	90			
126371	138.1 to 139.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
126384	152.0 to 158.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
126385	158.6 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
126372	166.8 to 167.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
126386	171.3 to 177.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
126387	178.5 to 184.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
126388	187.3 to 209.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**
126399	209.2 to 228.2 feet	Key Note Segment		5 ft	95			
126373	216.0 to 217.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126389	229.9 to 231.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
126374	231.9 to 232.9 feet	**Vertical Change**	3.21"	5 ft	5	REF		
126390	232.4 to 233.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
126400	235.3 to 254.3 feet	Key Note Segment		5 ft	95			
126375	242.4 to 243.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126376	254.5 to 255.5 feet	**Vertical Change**	.52"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081224	HOOVER AVE	TRUMAN DR	1847 HOOVER AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126391	257.5 to 267.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
126392	270.9 to 275.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
126393	278.2 to 284.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
126394	285.8 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: N *side of* **HOOVER AVE** *Starting at:* **TRUMAN DR** **$92,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171130	HOWARD RD	11 SANTA LUCIA DR	SANTA LUCIA DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88956	0.0 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
88943	7.4 to 8.4 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
88965	7.8 to 9.8 feet		5.0-6.0%	5 ft	10			
88966	7.8 to 9.8 feet	Running Slope	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
88944	11.9 to 12.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
88945	20.9 to 21.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
88946	23.5 to 24.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
88957	24.0 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88947	26.1 to 27.1 feet	**Vertical Change**	-1.18"	5 ft	5	SF	$75	**$375**
88958	30.9 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
88948	31.2 to 32.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
88949	33.3 to 36.8 feet	**Vertical Change**	.5"	5 ft	18	REF		
88959	36.3 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
88951	46.8 to 50.0 feet	**Vertical Change**	.49"	5 ft	16	LF	$75	**$1,200**
88960	48.2 to 50.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
88961	52.9 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88962	55.3 to 58.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
88952	59.1 to 60.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
88953	61.8 to 62.8 feet	**Vertical Change**	.99"	5 ft	5	SF	$75	**$375**
88954	67.3 to 68.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
88963	67.8 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88967	82.3 to 83.4 feet		5.0-6.0%	5 ft	6			
88968	83.4 to 85.3 feet		6.0-7.0%	5 ft	10			
88964	84.4 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **11 SANTA LUCIA DR** **$18,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241253	HOWARD RD	1409 HOWARD RD	ROTAN AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107196	13.2 to 32.3 feet	Key Note Segment		5 ft	95			
107185	31.9 to 32.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
107186	32.3 to 39.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	35	SF	$40	**$1,400**
107187	39.3 to 41.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
107188	44.8 to 53.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
107189	53.3 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	**$16,920**
107197	82.1 to 100.2 feet	Key Note Segment		5 ft	91			
107190	102.6 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
107191	108.5 to 109.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
107192	109.7 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
107193	118.3 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
107194	125.2 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
107195	138.1 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **1409 HOWARD RD** **$38,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241342	HOWARD RD	1717 HOWARD RD	WILLIAMS AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107350	6.8 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
107355	12.1 to 37.1 feet	Key Note Segment		5 ft	125			
107348	30.9 to 31.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
107351	39.2 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
107352	49.8 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
107353	67.9 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
107354	85.5 to 145.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	298	SF	$120	**$35,760**
107349	143.9 to 144.9 feet	**Vertical Change**	.53"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **1717 HOWARD RD** **$64,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241415	HOWARD RD	1800 HOWARD RD	FAIRVIEW AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107428	0.0 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
107429	4.6 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
107446	17.3 to 39.1 feet	Key Note Segment		5 ft	109			
107430	40.8 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
107431	42.9 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	157	SF	$120	**$18,840**
107421	58.2 to 59.2 feet	**Vertical Change**	.8"	5 ft	5	REF		
107432	78.0 to 102.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,820**
107423	84.5 to 85.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
107433	102.7 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
107434	107.6 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
107435	111.1 to 155.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	220	SF	$120	**$26,340**
107436	156.0 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
107437	171.7 to 179.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
107438	181.4 to 187.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
107447	187.7 to 210.8 feet	Key Note Segment		5 ft	116			
107424	198.3 to 199.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
107439	212.2 to 213.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
107440	216.3 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
107448	219.8 to 235.7 feet	Key Note Segment		5 ft	80			
107425	236.7 to 237.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
107441	261.3 to 274.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
107442	286.8 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	235	SF	$120	**$28,200**
107426	330.7 to 331.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
107443	336.2 to 352.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
107444	352.2 to 357.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
107445	359.2 to 363.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
107449	363.0 to 393.0 feet	Key Note Segment		5 ft	150			
107427	523.5 to 524.5 feet	**Vertical Change**	-.49"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241415	HOWARD RD	1800 HOWARD RD	FAIRVIEW AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: S	*side of* **HOWARD RD**	*Starting at:* **1800 HOWARD RD**						**$138,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251141	HOWARD RD	1919 HOWARD RD	1919 HOWARD RD	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108133	0.3 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
108134	1.3 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108135	9.6 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
108136	49.5 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
108129	51.8 to 52.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
108131	63.5 to 64.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
108137	66.8 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
108132	72.2 to 73.2 feet	**Vertical Change**	.6"	5 ft	5	REF		
108138	72.8 to 76.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **1919 HOWARD RD** **$20,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251143	HOWARD RD	1933 HOWARD RD	SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108142	0.0 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	52	SF	$120	**$6,264**
108143	8.8 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	218	SF	$120	**$26,136**
108139	19.7 to 20.7 feet	**Vertical Change**	.29"	9 ft	9	REF		
108140	33.6 to 34.6 feet	**Vertical Change**	.33"	9 ft	9	REF		
108144	33.8 to 44.4 feet	Cross Slope (PAR)	5.0-6.0%	9 ft	95	SF	$120	**$11,448**
108145	44.4 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	22	SF	$120	**$2,592**
108152	46.8 to 77.7 feet	Key Note Segment		9 ft	278			
108146	77.7 to 78.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	10	SF	$40	**$396**
108147	82.8 to 94.0 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	101	SF	$120	**$12,096**
108148	94.8 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	20	SF	$120	**$2,376**
108149	100.9 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	23	SF	$120	**$2,808**
108150	107.0 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	127	SF	$120	**$15,228**
108151	124.0 to 138.4 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	130	SF	$120	**$15,552**
108141	134.6 to 135.6 feet	**Vertical Change**	.42"	9 ft	9	REF		

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **1933 HOWARD RD** **$94,896.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120925	HOWARD RD	20 MAKENNA DR	MAKENNA DR	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93786	0.6 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
93787	41.6 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
93785	49.8 to 50.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
93788	52.0 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
93789	69.7 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **20 MAKENNA DR** **$17,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171124	HOWARD RD	3399 HOWARD RD	24341 AVE 14	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88903	0.0 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
88904	25.0 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
88941	56.1 to 57.6 feet		5.0-6.0%	5 ft	8			
88891	89.4 to 90.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
88905	95.3 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
88906	100.8 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88907	105.9 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88908	112.1 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88909	117.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
88910	135.7 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
88942	142.5 to 143.8 feet		6.0-7.0%	5 ft	7			
88892	156.5 to 157.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
88911	161.8 to 171.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
88912	174.6 to 184.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
88893	184.8 to 185.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
88913	189.3 to 190.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88914	194.8 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88915	207.2 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
88894	212.8 to 213.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
88916	213.8 to 214.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88917	222.5 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
88918	243.6 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
88919	253.3 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
88920	264.6 to 265.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88921	274.3 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
88895	283.4 to 284.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
88896	297.6 to 298.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
88922	307.8 to 308.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171124	HOWARD RD	3399 HOWARD RD	24341 AVE 14	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88897	311.7 to 312.7 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
88923	314.8 to 317.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,860
88924	317.9 to 319.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
88925	325.5 to 340.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,880
88898	339.8 to 340.8 feet	Vertical Change	.32"	5 ft	5	REF		
88926	344.1 to 346.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
88927	346.3 to 347.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
88928	351.3 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
88899	360.6 to 361.6 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
88929	372.2 to 378.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
88930	384.3 to 388.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
88931	392.3 to 395.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
88932	396.6 to 405.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
88933	408.2 to 413.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
88934	417.6 to 424.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
88900	422.1 to 423.1 feet	Vertical Change	.26"	5 ft	5	REF		
88935	427.8 to 434.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
88901	438.9 to 439.9 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
88936	442.3 to 447.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
88937	463.6 to 465.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
88902	467.2 to 468.2 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
88940	470.1 to 502.0 feet	Key Note Segment		5 ft	160			
88938	503.0 to 506.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$2,040
88939	508.7 to 522.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	$8,400

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **3399 HOWARD RD** **$130,185.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251140	HOWARD RD	AMERINE AVE	1950 HOWARD RD	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108116	3.2 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
108127	13.5 to 39.4 feet	Key Note Segment		5 ft	130			
108112	40.4 to 41.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
108117	40.8 to 49.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
108118	53.7 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,380**
108113	61.6 to 62.6 feet	**Vertical Change**	-.39"	5 ft	5	REF		
108119	81.8 to 88.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
108120	89.1 to 90.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
108121	91.4 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
108122	97.0 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
108114	102.2 to 103.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
108123	105.5 to 109.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
108115	108.7 to 109.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
108124	114.3 to 118.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
108125	118.2 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
108126	136.4 to 143.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **AMERINE AVE** **$59,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171150	HOWARD RD	ASILOMAR DR	24181 AVENUE 14	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89209	0.3 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89208	23.2 to 24.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **ASILOMAR DR** **$1,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241404	HOWARD RD	DWYER AVE	1800 HOWARD RD	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107416	0.5 to 19.6 feet	Key Note Segment		5 ft	96			
107405	22.4 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
107406	63.3 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
107417	66.0 to 96.7 feet	Key Note Segment		5 ft	154			
107407	100.3 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
107408	118.1 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
107409	131.0 to 135.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
107410	138.2 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,260**
107418	180.3 to 220.0 feet	Key Note Segment		5 ft	199			
107411	220.7 to 222.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
107402	222.9 to 223.9 feet	**Vertical Change**	1.12"	5 ft	5	REF		
107412	223.4 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
107403	227.4 to 228.4 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
107413	229.2 to 274.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	228	SF	$120	**$27,300**
107414	274.9 to 278.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
107419	279.8 to 301.8 feet	Key Note Segment		5 ft	110			
107404	301.7 to 302.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
107415	302.8 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **DWYER AVE** **$87,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241305	HOWARD RD	FAIRVIEW AVE	1613 HOWARD RD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107254	0.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
107255	5.3 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
107256	24.7 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
107257	51.0 to 79.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,100**
107253	66.2 to 67.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
107260	79.5 to 105.3 feet	Key Note Segment		5 ft	129			
107258	110.8 to 129.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,460**
107261	131.9 to 152.2 feet	Key Note Segment		5 ft	101			
107259	156.9 to 159.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **FAIRVIEW AVE** **$54,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241311	HOWARD RD	FAIRVIEW AVE	ROTAN AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107262	1.1 to 2.1 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
107267	3.3 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
107268	10.5 to 19.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	$5,580
107269	22.4 to 27.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
107263	24.7 to 25.7 feet	Vertical Change	.38"	5 ft	5	REF		
107270	30.2 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	$5,460
107264	30.6 to 31.6 feet	Vertical Change	.31"	5 ft	5	REF		
107271	39.3 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
107272	43.2 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
107265	50.7 to 51.7 feet	Vertical Change	-.63"	5 ft	5	REF		
107273	54.9 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	$16,200
107274	87.6 to 91.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
107275	94.5 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	$12,240
107276	118.7 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
107277	120.7 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
107283	134.0 to 159.6 feet	Key Note Segment		5 ft	128			
107266	148.2 to 149.2 feet	Vertical Change	-.27"	5 ft	5	REF		
107278	162.7 to 173.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
107279	177.0 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
107280	194.1 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,720
107281	213.2 to 247.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	$20,340
107282	255.3 to 259.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **FAIRVIEW AVE** **$105,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201120909	HOWARD RD	MAKENNA DR	ST TROPEZ DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93655	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
93662	2.8 to 27.0 feet	Key Note Segment		5 ft	121			
93651	5.8 to 6.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
93652	12.5 to 13.5 feet	**Vertical Change**	1.79"	5 ft	5	REF		
93656	40.6 to 54.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
93663	56.9 to 76.9 feet	Key Note Segment		5 ft	100			
93657	77.4 to 80.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$580**
93664	81.3 to 103.2 feet	Key Note Segment		5 ft	110			
93658	107.3 to 108.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
93653	110.5 to 111.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
93659	113.8 to 116.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
93660	118.7 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
93661	123.6 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**

TOTAL COST FOR: E *side of* **HOWARD RD** *Starting at:* **MAKENNA DR** **$23,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120922	HOWARD RD	MAKENNA DR	ST TROPEZ DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93751	0.0 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
93752	23.3 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93753	27.3 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
93754	38.7 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
93755	53.6 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93744	57.5 to 58.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
93756	58.8 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
93757	62.4 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
93758	71.8 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
93745	75.1 to 76.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
93759	80.6 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
93746	81.5 to 82.5 feet	**Vertical Change**	-.53"	5 ft	5	REF		
93760	89.4 to 90.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
93761	90.6 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
93762	95.0 to 96.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
93763	98.4 to 103.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
93747	105.1 to 106.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
93764	107.9 to 109.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
93765	111.6 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
93766	115.3 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
93767	125.1 to 130.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
93768	130.3 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93769	133.9 to 135.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
93770	139.8 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
93748	141.0 to 142.0 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
93771	154.0 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
93772	166.8 to 170.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
93773	170.3 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120922	HOWARD RD	MAKENNA DR	ST TROPEZ DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93774	173.8 to 190.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
93775	193.1 to 198.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
93776	198.9 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
93777	220.0 to 222.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
93778	224.8 to 231.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
93779	233.3 to 235.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
93780	236.3 to 245.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
93749	243.2 to 244.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
93781	246.3 to 253.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
93782	259.5 to 261.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
93783	262.3 to 266.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
93784	266.6 to 275.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,340**
93750	275.5 to 276.5 feet	**Vertical Change**	.51"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **MAKENNA DR** **$108,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241326	HOWARD RD	PARKING LOT ENTRANCE	PINE ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107329	0.8 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
107330	9.1 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
107331	19.1 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
107332	31.6 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
107333	38.9 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
107334	44.0 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
107328	53.0 to 56.0 feet	**Vertical Change**	.36"	5 ft	15	LF	$75	**$1,125**
107335	59.4 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
107336	81.1 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
107337	97.3 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **PARKING LOT ENTRANCE** **$35,565.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241251	HOWARD RD	PINE ST	1405 HOWARD RD	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107183	3.2 to 4.8 feet		5.0-6.0%	5 ft	8			
107179	10.9 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
107178	18.4 to 19.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
107180	42.1 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
107181	54.2 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
107182	79.1 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
107184	80.3 to 81.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **PINE ST** **$20,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241256	HOWARD RD	ROTAN AVE	FAIRVIEW AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107202	1.6 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
107198	4.4 to 5.4 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
107203	6.8 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
107199	8.4 to 9.4 feet	**Vertical Change**	.67"	5 ft	5	REF		
107204	14.9 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
107205	20.3 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
107206	26.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
107207	57.3 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
107200	58.8 to 59.8 feet	**Vertical Change**	-.48"	5 ft	5	REF		
107208	67.3 to 84.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
107209	84.9 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
107201	89.0 to 90.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
107220	91.3 to 115.9 feet	Key Note Segment		5 ft	123			
107210	117.9 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
107211	148.1 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
107212	155.1 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
107213	168.8 to 171.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
107214	179.9 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
107215	190.5 to 193.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
107216	205.2 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
107217	212.5 to 216.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
107218	219.4 to 222.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
107219	229.8 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **ROTAN AVE** **$61,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241324	HOWARD RD	ROTAN AVE	1420 HOWARD RD	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107317	8.1 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
107325	18.7 to 39.9 feet	Key Note Segment		5 ft	106			
107318	39.9 to 51.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	60	SF	$40	**$2,400**
107314	49.6 to 50.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
107319	52.8 to 54.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
107315	54.3 to 55.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
107320	54.3 to 55.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
107321	55.8 to 58.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
107322	58.4 to 59.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
107323	59.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
107316	80.9 to 81.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
107326	83.3 to 91.6 feet		6.0-7.0%	5 ft	42			
107327	85.7 to 91.6 feet	Running Slope	7.0-8.0%	5 ft	30	SF	$120	**$3,540**
107324	91.8 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **ROTAN AVE** **$33,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171155	HOWARD RD	SANTA LUCIA DR	ASILOMAR DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89228	1.8 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
89229	8.8 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
89230	12.8 to 18.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
89210	14.8 to 15.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
89231	21.2 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
89211	24.4 to 27.9 feet	**Vertical Change**	.28"	5 ft	18	REF		
89232	30.9 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
89212	36.7 to 40.3 feet	**Vertical Change**	.27"	5 ft	18	LF	$75	**$1,350**
89233	58.0 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
89213	65.7 to 66.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
89234	69.1 to 73.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
89214	75.7 to 76.7 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
89235	87.8 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
89236	103.4 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$11,040**
89215	117.2 to 118.2 feet	**Vertical Change**	.62"	5 ft	5	REF		
89217	124.7 to 128.4 feet	**Vertical Change**	.26"	5 ft	19	LF	$75	**$1,388**
89218	129.4 to 130.4 feet	**Vertical Change**	.66"	5 ft	5	REF		
89237	129.6 to 133.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
89219	133.3 to 134.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
89220	135.6 to 136.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
89238	135.6 to 136.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
89221	138.6 to 144.3 feet	**Vertical Change**	.26"	5 ft	29	REF		
89239	139.5 to 140.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89240	143.9 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
89222	147.1 to 148.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
89241	150.0 to 152.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
89242	152.9 to 154.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
89223	155.3 to 156.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171155	HOWARD RD	SANTA LUCIA DR	ASILOMAR DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89243	157.4 to 158.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
89244	159.8 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
89224	161.3 to 162.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
89245	165.1 to 166.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
89246	170.3 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
89247	177.1 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
89225	185.2 to 186.2 feet	**Vertical Change**	2.8"	5 ft	5	REF		
89226	186.9 to 187.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
89248	189.8 to 193.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
89249	196.6 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
89250	210.1 to 215.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
89251	219.1 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,800**
89227	233.0 to 234.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
89252	243.6 to 257.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **SANTA LUCIA DR** **$102,382.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251153	HOWARD RD	SCHNOOR AVE	2001 SCHNOOR AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108184	0.1 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108185	5.2 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
108186	15.0 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
108182	25.3 to 26.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
108187	33.4 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108188	43.9 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
108189	48.3 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
108183	54.5 to 55.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
108190	66.8 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**

TOTAL COST FOR: N *side of* **HOWARD RD** *Starting at:* **SCHNOOR AVE** **$33,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251117	HOWARD RD	SCHNOOR AVE	DWYER AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107968	0.3 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	19	SF	$120	**$2,304**
107969	5.0 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	37	SF	$120	**$4,416**
107960	8.7 to 9.7 feet	**Vertical Change**	.35"	8 ft	8	REF		
107970	21.8 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	40	SF	$120	**$4,800**
107971	30.7 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	170	SF	$120	**$20,352**
107961	39.8 to 40.8 feet	**Vertical Change**	.53"	8 ft	8	REF		
107972	54.1 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	**$1,632**
107973	56.3 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	21	SF	$120	**$2,496**
107998	59.7 to 90.0 feet	Key Note Segment		8 ft	242			
107974	91.5 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	183	SF	$120	**$21,984**
107975	121.2 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	13	SF	$120	**$1,536**
107976	133.6 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	279	SF	$120	**$33,504**
107962	147.7 to 148.7 feet	**Vertical Change**	-.42"	8 ft	8	REF		
107999	170.2 to 193.4 feet	Key Note Segment		8 ft	186			
107963	190.7 to 191.7 feet	**Vertical Change**	-.35"	8 ft	8	REF		
107977	194.3 to 195.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,248**
107978	196.4 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,920**
107979	204.2 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	63	SF	$120	**$7,584**
107980	212.5 to 228.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	126	SF	$120	**$15,168**
107964	216.2 to 217.2 feet	**Vertical Change**	.39"	8 ft	8	REF		
107981	228.7 to 265.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	293	SF	$120	**$35,136**
107982	268.3 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	76	SF	$120	**$9,120**
108000	278.2 to 367.4 feet	Key Note Segment		8 ft	714			
107965	279.2 to 280.2 feet	**Vertical Change**	.29"	8 ft	8	REF		
107983	367.4 to 371.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	8 ft	34	SF	$40	**$1,344**
107984	372.4 to 383.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	86	SF	$120	**$10,272**
107985	383.1 to 385.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,592**
107966	409.4 to 410.4 feet	**Vertical Change**	2.42"	8 ft	8	SF	$75	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251117	HOWARD RD	SCHNOOR AVE	DWYER AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107986	411.6 to 414.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,592**
107987	418.3 to 422.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	31	SF	$120	**$3,744**
107967	422.0 to 423.0 feet	**Vertical Change**	.32"	8 ft	8	REF		
108001	423.0 to 453.0 feet	Key Note Segment		8 ft	240			
107988	453.3 to 463.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	80	SF	$40	**$3,200**
107989	466.4 to 473.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	58	SF	$120	**$6,912**
107990	476.6 to 494.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	145	SF	$120	**$17,376**
108002	504.3 to 534.9 feet	Key Note Segment		8 ft	245			
107991	536.6 to 538.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	13	SF	$120	**$1,536**
107992	552.4 to 556.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	33	SF	$120	**$3,936**
108003	557.1 to 578.8 feet	Key Note Segment		8 ft	174			
107993	579.7 to 580.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
107994	584.6 to 591.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	57	SF	$120	**$6,816**
108004	591.7 to 625.8 feet	Key Note Segment		8 ft	273			
107995	625.8 to 632.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	53	SF	$40	**$2,112**
107996	633.8 to 638.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,128**
107997	638.4 to 639.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **SCHNOOR AVE** **$232,856.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120910	HOWARD RD	ST TROPEZ DR	BERRY DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93670	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
93671	4.8 to 14.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
93672	17.9 to 25.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
93665	23.0 to 24.0 feet	**Vertical Change**	-.91"	5 ft	5	REF		
93673	29.3 to 31.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
93674	31.8 to 37.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
93675	37.9 to 44.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,020**
93666	38.1 to 39.1 feet	**Vertical Change**	.53"	5 ft	5	REF		
93667	46.8 to 47.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
93676	47.7 to 48.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
93677	48.9 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
93678	53.4 to 54.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
93668	55.2 to 56.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
93669	70.3 to 71.3 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **HOWARD RD** *Starting at:* **ST TROPEZ DR** **$25,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111103	HULL AVE	A ST	SUNRISE AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58436	0.0 to 4.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
58437	4.7 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
58438	35.8 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58439	40.8 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
58440	54.1 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
58441	64.8 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
58442	72.4 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,620**
58443	92.7 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
58444	108.1 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
58494	121.5 to 136.8 feet	Key Note Segment		5 ft	77			
58445	144.5 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
58410	152.0 to 153.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
58446	162.5 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
58411	164.7 to 165.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
58495	172.3 to 186.9 feet	Key Note Segment		5 ft	73			
58447	186.9 to 189.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$420**
58448	189.0 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
58449	206.5 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
58412	207.3 to 208.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
58496	209.6 to 219.1 feet	Key Note Segment		5 ft	48			
58450	219.1 to 223.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
58451	225.5 to 232.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
58452	236.9 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
58453	252.3 to 257.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
58497	257.0 to 271.0 feet	Key Note Segment		5 ft	70			
58413	257.3 to 258.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
58414	264.3 to 265.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
58415	281.8 to 282.8 feet	**Vertical Change**	-.6"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111103	HULL AVE	A ST	SUNRISE AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58454	284.9 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
58455	295.1 to 297.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
58498	297.2 to 307.4 feet	Key Note Segment		5 ft	51			
58456	307.4 to 323.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	82	SF	$40	**$3,280**
58416	324.8 to 325.8 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
58457	326.7 to 330.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
58458	330.3 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
58417	336.3 to 337.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
58499	338.0 to 351.1 feet	Key Note Segment		5 ft	66			
58459	351.1 to 379.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	144	SF	$40	**$5,740**
58419	377.6 to 380.8 feet	**Vertical Change**	-.43"	5 ft	16	REF		
58500	380.0 to 392.3 feet	Key Note Segment		5 ft	62			
58420	391.8 to 392.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
58460	392.3 to 397.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$940**
58421	411.8 to 412.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
58501	427.3 to 441.8 feet	Key Note Segment		5 ft	73			
58461	453.8 to 456.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
58462	456.4 to 474.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
58463	474.3 to 475.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58502	476.2 to 488.4 feet	Key Note Segment		5 ft	61			
58464	490.4 to 491.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58465	494.3 to 497.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
58503	497.5 to 511.3 feet	Key Note Segment		5 ft	69			
58466	511.3 to 522.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,180**
58422	520.4 to 521.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
58467	522.2 to 525.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**
58468	525.3 to 526.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
58469	530.7 to 533.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111103	HULL AVE	A ST	SUNRISE AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58504	536.4 to 546.8 feet	Key Note Segment		5 ft	52			
58470	548.9 to 587.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,400**
58471	622.4 to 623.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58505	625.0 to 635.5 feet	Key Note Segment		5 ft	53			
58423	635.8 to 636.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
58472	639.6 to 646.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
58506	647.6 to 662.7 feet	Key Note Segment		5 ft	76			
58424	655.5 to 656.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
58473	663.8 to 673.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
58474	676.2 to 700.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
58425	677.0 to 678.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
58426	690.9 to 691.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
58427	696.8 to 697.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
58475	701.0 to 712.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
58507	712.9 to 726.9 feet	Key Note Segment		5 ft	70			
58428	720.5 to 721.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
58476	731.5 to 739.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
58508	742.5 to 752.9 feet	Key Note Segment		5 ft	52			
58429	751.9 to 752.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
58477	757.2 to 760.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
58430	762.1 to 763.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
58478	762.5 to 764.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
58479	766.8 to 773.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
58480	780.0 to 784.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
58481	787.4 to 791.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
58431	787.9 to 788.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
58482	793.7 to 811.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
58432	800.5 to 801.5 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111103	HULL AVE	A ST	SUNRISE AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58483	814.2 to 826.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
58509	826.0 to 837.1 feet	Key Note Segment		5 ft	56			
58433	826.6 to 827.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
58484	837.1 to 848.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	59	SF	$40	**$2,340**
58510	849.3 to 864.1 feet	Key Note Segment		5 ft	74			
58434	857.3 to 858.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
58485	864.1 to 884.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	102	SF	$40	**$4,060**
58486	885.3 to 887.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
58511	889.2 to 899.5 feet	Key Note Segment		5 ft	52			
58435	905.9 to 906.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
58487	909.2 to 918.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
58512	918.1 to 931.7 feet	Key Note Segment		5 ft	68			
58488	931.7 to 933.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
58489	938.8 to 969.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
58513	969.8 to 988.2 feet	Key Note Segment		5 ft	92			
58490	989.3 to 992.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
58491	992.6 to 1041.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	244	SF	$120	**$29,280**
58492	1044.2 to 1053.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
58493	1057.3 to 1061.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: E *side of* **HULL AVE** *Starting at:* **A ST** **$287,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111204	HULL AVE	A ST	STREET END	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59046	0.0 to 21.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	109	SF	$120	**$13,020**
59047	21.7 to 24.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
59048	25.4 to 26.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
59049	27.2 to 31.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
59050	31.5 to 34.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
59051	34.4 to 36.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
59089	36.5 to 51.5 feet	Key Note Segment		5 ft	75			
59029	39.8 to 40.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
59030	42.0 to 43.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
59052	52.9 to 58.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
59053	58.4 to 60.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
59054	62.8 to 64.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
59055	64.7 to 65.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
59056	69.5 to 80.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
59057	80.8 to 82.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
59090	82.8 to 97.5 feet	Key Note Segment		5 ft	74			
59031	83.7 to 84.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
59032	89.7 to 90.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
59058	98.3 to 100.9 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	13	SF	$40	**$520**
59059	100.9 to 103.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	15	SF	$120	**$1,740**
59060	103.8 to 105.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
59061	106.8 to 125.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	92	SF	$120	**$11,040**
59062	125.3 to 127.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
59063	127.2 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
59064	131.9 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
59065	137.6 to 142.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
59066	142.0 to 143.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
59091	143.1 to 161.9 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111204	HULL AVE	A ST	STREET END	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59033	144.3 to 145.3 feet	Vertical Change	.3"	5 ft	5	REF		
59067	162.9 to 169.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,780
59068	174.5 to 190.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	$9,480
59034	192.6 to 193.6 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
59069	195.2 to 207.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	$7,200
59035	206.9 to 207.9 feet	Vertical Change	.3"	5 ft	5	REF		
59070	207.7 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
59092	209.9 to 225.0 feet	Key Note Segment		5 ft	76			
59036	213.7 to 214.7 feet	Vertical Change	-.26"	5 ft	5	REF		
59037	222.7 to 223.7 feet	Vertical Change	2.66"	5 ft	5	REF		
59071	226.3 to 246.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	$12,360
59038	229.5 to 230.5 feet	Vertical Change	.53"	5 ft	5	REF		
59093	247.6 to 269.8 feet	Key Note Segment		5 ft	111			
59039	248.0 to 249.0 feet	Vertical Change	-.26"	5 ft	5	REF		
59072	269.8 to 291.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	108	SF	$40	$4,320
59040	285.8 to 286.8 feet	Vertical Change	.4"	5 ft	5	REF		
59041	289.6 to 290.6 feet	Vertical Change	-.29"	5 ft	5	REF		
59073	299.5 to 303.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
59074	316.5 to 321.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
59075	337.8 to 382.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	225	SF	$120	$26,940
59076	385.5 to 398.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	$7,680
59077	398.3 to 407.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
59078	411.4 to 414.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
59079	415.8 to 440.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	$14,820
59080	442.9 to 447.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580
59081	448.6 to 449.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
59082	453.4 to 492.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	194	SF	$120	$23,280
59042	463.5 to 464.5 feet	Vertical Change	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111204	HULL AVE	A ST	STREET END	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59043	472.6 to 473.6 feet	Vertical Change	2.7"	5 ft	5	REF		
59044	476.4 to 477.4 feet	Vertical Change	.27"	5 ft	5	REF		
59045	489.3 to 490.3 feet	Vertical Change	.26"	5 ft	5	REF		
59083	494.3 to 495.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
59084	499.4 to 501.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
59085	503.5 to 511.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
59086	511.4 to 514.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
59087	516.9 to 526.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
59088	526.8 to 530.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: W *side of* **HULL AVE** *Starting at:* **A ST** **$201,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111155	HULL AVE	S LAKE ST	A ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58957	0.8 to 29.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,340**
58940	1.5 to 2.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
58941	26.4 to 27.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
58958	33.0 to 44.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
58985	44.6 to 59.6 feet	Key Note Segment		5 ft	75			
58942	50.6 to 51.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
58959	64.6 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
58960	75.1 to 79.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
58961	79.0 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
58962	89.1 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
58963	104.3 to 112.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
58964	116.8 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
58943	117.3 to 118.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
58965	122.2 to 132.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
58986	132.1 to 144.8 feet	Key Note Segment		5 ft	64			
58945	139.8 to 140.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
58966	144.8 to 159.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	73	SF	$40	**$2,920**
58967	164.2 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
58987	178.2 to 194.2 feet	Key Note Segment		5 ft	80			
58968	194.5 to 195.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
58969	198.5 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
58970	202.2 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
58988	205.6 to 217.7 feet	Key Note Segment		5 ft	61			
58971	219.3 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
58972	229.3 to 238.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
58946	236.0 to 237.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
58973	241.2 to 245.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
58974	250.7 to 271.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111155	HULL AVE	S LAKE ST	A ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58989	271.8 to 300.8 feet	Key Note Segment		5 ft	145			
58947	298.9 to 299.9 feet	Vertical Change	-.34"	5 ft	5	REF		
58975	300.8 to 303.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$620
58976	306.5 to 309.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
58977	309.5 to 357.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	238	SF	$120	$28,560
58990	357.1 to 373.3 feet	Key Note Segment		5 ft	81			
58948	366.1 to 367.1 feet	Vertical Change	.48"	5 ft	5	REF		
58978	378.8 to 396.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,440
58950	379.4 to 380.4 feet	Vertical Change	-.37"	5 ft	5	REF		
58951	382.7 to 383.7 feet	Vertical Change	1.26"	5 ft	5	REF		
58952	394.0 to 395.0 feet	Vertical Change	.54"	5 ft	5	REF		
58979	400.8 to 403.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
58953	407.0 to 408.0 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
58980	410.5 to 419.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
58981	422.3 to 425.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
58954	423.9 to 424.9 feet	Vertical Change	.33"	5 ft	5	REF		
58991	426.3 to 442.0 feet	Key Note Segment		5 ft	79			
58955	443.4 to 444.4 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
58982	445.3 to 455.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,060
58983	456.3 to 479.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	$14,100
58956	457.1 to 458.1 feet	Vertical Change	-.35"	5 ft	5	REF		
58984	481.8 to 497.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	$9,360
58992	495.4 to 496.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **HULL AVE** *Starting at:* **S LAKE ST** **$176,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111210	HULL AVE	STREET END	A ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59107	0.0 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
59108	6.8 to 10.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
59141	11.3 to 33.3 feet	Key Note Segment		5 ft	110			
59094	31.6 to 32.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
59109	33.6 to 34.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
59110	34.7 to 39.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
59111	39.2 to 50.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$7,020**
59142	51.5 to 69.9 feet	Key Note Segment		5 ft	92			
59112	70.8 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
59143	92.9 to 111.9 feet	Key Note Segment		5 ft	95			
59113	113.2 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
59095	127.0 to 129.8 feet	**Vertical Change**	.39"	5 ft	14	LF	$75	**$1,050**
59096	131.1 to 132.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
59144	134.3 to 154.6 feet	Key Note Segment		5 ft	101			
59097	134.7 to 135.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
59114	154.6 to 166.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	61	SF	$40	**$2,440**
59115	166.8 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
59116	182.8 to 195.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
59117	200.6 to 202.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
59145	202.3 to 222.4 feet	Key Note Segment		5 ft	101			
59099	203.9 to 204.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
59100	221.5 to 222.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
59101	223.8 to 224.8 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
59102	225.8 to 226.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
59118	225.8 to 228.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
59119	231.3 to 237.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
59120	239.9 to 253.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
59121	257.8 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111210	HULL AVE	STREET END	A ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59122	266.8 to 275.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
59123	280.4 to 288.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
59124	293.0 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
59146	315.3 to 326.2 feet	Key Note Segment		5 ft	55			
59125	334.4 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
59103	340.0 to 341.0 feet	**Vertical Change**	.45"	5 ft	5	REF		
59126	346.7 to 348.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
59104	347.8 to 348.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
59127	351.8 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59128	355.3 to 358.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
59129	358.2 to 367.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
59130	369.9 to 371.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
59131	371.9 to 373.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
59132	373.3 to 384.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	55	SF	$120	**$6,540**
59147	384.2 to 398.0 feet	Key Note Segment		5 ft	69			
59133	398.5 to 414.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	78	SF	$40	**$3,100**
59105	402.9 to 403.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
59106	413.6 to 414.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
59134	414.7 to 427.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
59148	428.2 to 442.5 feet	Key Note Segment		5 ft	72			
59135	444.3 to 461.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
59136	462.2 to 463.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
59137	468.3 to 470.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
59149	473.2 to 487.4 feet	Key Note Segment		5 ft	71			
59138	488.1 to 494.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
59139	495.9 to 505.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
59140	508.3 to 523.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,300**

TOTAL COST FOR: E *side of* **HULL AVE** *Starting at:* **STREET END** **$156,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111108	HULL AVE	SUNRISE AVE	S LAKE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58541	0.2 to 27.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,500**
58542	27.7 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
58568	29.6 to 50.8 feet	Key Note Segment		5 ft	106			
58514	30.2 to 31.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
58515	41.6 to 42.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
58516	44.2 to 45.2 feet	**Vertical Change**	3.28"	5 ft	5	REF		
58517	51.7 to 52.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
58543	53.4 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,780**
58518	60.2 to 61.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
58519	73.5 to 74.5 feet	**Vertical Change**	-.71"	5 ft	5	REF		
58544	98.3 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58520	120.8 to 121.8 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
58521	126.2 to 127.2 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
58522	128.2 to 129.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
58569	132.3 to 146.9 feet	Key Note Segment		5 ft	73			
58545	150.3 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
58570	159.0 to 169.0 feet	Key Note Segment		5 ft	50			
58523	160.0 to 161.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
58546	170.5 to 174.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
58547	175.5 to 178.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
58548	179.3 to 184.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
58549	185.5 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
58571	198.9 to 224.3 feet	Key Note Segment		5 ft	127			
58524	223.0 to 224.0 feet	**Vertical Change**	.53"	5 ft	5	REF		
58550	224.3 to 228.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
58551	230.8 to 236.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
58525	234.4 to 235.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
58526	242.9 to 243.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111108	HULL AVE	SUNRISE AVE	S LAKE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58552	250.9 to 251.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58527	251.5 to 252.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
58572	264.0 to 278.5 feet	Key Note Segment		5 ft	73			
58528	264.6 to 265.6 feet	**Vertical Change**	-1.02"	5 ft	5	REF		
58529	278.4 to 279.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
58553	278.5 to 301.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	114	SF	$40	**$4,560**
58573	306.8 to 320.9 feet	Key Note Segment		5 ft	70			
58530	307.5 to 308.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
58554	325.2 to 326.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58531	325.6 to 326.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
58574	331.7 to 345.6 feet	Key Note Segment		5 ft	70			
58555	346.5 to 357.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,160**
58533	369.3 to 370.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
58556	370.9 to 377.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
58534	371.2 to 372.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
58557	378.6 to 384.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
58558	385.8 to 387.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58535	389.9 to 390.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
58559	390.4 to 393.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
58575	393.8 to 409.7 feet	Key Note Segment		5 ft	80			
58536	395.3 to 396.3 feet	**Vertical Change**	1.06"	5 ft	5	REF		
58537	403.6 to 404.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
58560	413.0 to 414.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
58561	415.4 to 418.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
58576	418.1 to 428.4 feet	Key Note Segment		5 ft	52			
58538	426.2 to 427.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
58562	429.7 to 431.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
58563	431.3 to 433.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111108	HULL AVE	SUNRISE AVE	S LAKE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58564	435.2 to 443.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
58565	443.4 to 468.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
58539	468.1 to 469.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
58566	468.5 to 480.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
58567	483.3 to 492.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
58540	491.4 to 492.4 feet	**Vertical Change**	1.92"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **HULL AVE** *Starting at:* **SUNRISE AVE** **$125,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121313	IMPERIAL DR	FILLMORE AVE	RIVERVIEW DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95558	1.5 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,220**
95559	25.2 to 33.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
95560	33.3 to 40.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
95561	42.2 to 43.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
95562	45.0 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
95563	54.0 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
95551	61.7 to 62.7 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
95564	64.8 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
95565	91.2 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
95566	105.7 to 117.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
95552	113.9 to 114.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
95567	121.1 to 127.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
95553	127.0 to 128.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
95568	130.0 to 145.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
95554	133.0 to 134.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
95569	146.6 to 150.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
95570	150.0 to 153.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,220**
95555	153.2 to 154.2 feet	**Vertical Change**	-.59"	5 ft	5	REF		
95571	153.7 to 160.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	34	SF	$120	**$4,080**
95556	157.5 to 158.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
95572	161.2 to 162.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
95573	164.1 to 165.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
95574	165.5 to 170.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
95575	170.8 to 176.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
95576	177.7 to 190.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
95577	190.9 to 193.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
95578	191.1 to 193.2 feet		5.0-6.0%	5 ft	11			
95579	191.1 to 193.2 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121313	IMPERIAL DR	FILLMORE AVE	RIVERVIEW DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95557	193.2 to 194.2 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **IMPERIAL DR** *Starting at:* **FILLMORE AVE** **$101,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121318	IMPERIAL DR	RIVERVIEW DR	UNIVERSITY AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95627	0.4 to 2.0 feet		5.0-6.0%	5 ft	8			
95597	1.9 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
95618	7.8 to 38.4 feet	Key Note Segment		5 ft	153			
95580	27.8 to 28.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
95598	38.9 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,760**
95619	73.5 to 94.5 feet	Key Note Segment		5 ft	105			
95620	103.8 to 123.2 feet	Key Note Segment		5 ft	97			
95599	124.9 to 141.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
95582	130.5 to 131.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95600	143.8 to 150.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
95601	151.3 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
95583	151.9 to 152.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95621	157.8 to 178.1 feet	Key Note Segment		5 ft	101			
95584	158.1 to 162.0 feet	**Vertical Change**	.33"	5 ft	20	REF		
95602	180.0 to 194.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
95585	186.5 to 187.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
95586	188.5 to 193.1 feet	**Vertical Change**	-.34"	5 ft	23	REF		
95587	195.3 to 196.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
95588	197.0 to 198.0 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
95589	199.1 to 202.0 feet	**Vertical Change**	-.31"	5 ft	15	REF		
95603	199.3 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
95590	207.8 to 208.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
95604	210.1 to 216.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
95605	220.3 to 233.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
95622	234.0 to 254.0 feet	Key Note Segment		5 ft	100			
95591	234.8 to 235.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
95606	254.8 to 259.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
95607	261.2 to 265.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121318	IMPERIAL DR	RIVERVIEW DR	UNIVERSITY AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95623	265.6 to 285.6 feet	Key Note Segment		5 ft	100			
95608	286.3 to 312.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	130	SF	$40	$5,200
95609	317.7 to 332.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,820
95624	332.4 to 361.0 feet	Key Note Segment		5 ft	143			
95592	348.8 to 352.6 feet	Vertical Change	.5"	5 ft	19	REF		
95610	362.8 to 365.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
95611	365.9 to 369.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
95625	369.7 to 389.9 feet	Key Note Segment		5 ft	101			
95612	393.3 to 406.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
95613	409.0 to 420.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
95626	422.7 to 453.8 feet	Key Note Segment		5 ft	156			
95593	422.9 to 423.9 feet	Vertical Change	.28"	5 ft	5	REF		
95594	433.2 to 434.2 feet	Vertical Change	-.27"	5 ft	5	REF		
95614	454.7 to 458.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
95615	462.0 to 466.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580
95616	466.3 to 467.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
95617	471.5 to 480.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
95596	480.6 to 481.6 feet	Vertical Change	.49"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **IMPERIAL DR** *Starting at:* **RIVERVIEW DR** **$119,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121307	IMPERIAL DR	UNIVERSITY AVE	FILLMORE AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95483	1.7 to 8.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
95484	11.3 to 13.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
95485	15.8 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
95486	19.7 to 34.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
95487	36.8 to 50.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
95488	53.2 to 57.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
95489	59.8 to 69.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,580**
95490	72.0 to 96.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	125	SF	$120	**$14,940**
95491	98.4 to 99.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
95492	100.4 to 109.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
95493	110.5 to 116.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
95494	117.2 to 119.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
95495	119.2 to 120.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
95496	121.0 to 126.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
95497	128.3 to 130.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,380**
95498	130.9 to 139.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
95499	141.8 to 148.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
95500	149.2 to 154.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: E *side of* **IMPERIAL DR** *Starting at:* **UNIVERSITY AVE** **$75,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112151048	INDEPENDENCE DRIVE	1951 INDEPENDENCE	VICTORY LANE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81678	0.0 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
81679	6.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81680	21.6 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
81681	35.2 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81682	42.8 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
81660	45.1 to 46.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
81683	48.4 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
81661	54.1 to 55.1 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
81684	62.7 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
81685	82.7 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81686	95.2 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
81687	101.0 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
81662	108.4 to 109.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
81663	117.2 to 118.2 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
81688	142.1 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81689	165.8 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
81690	172.3 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81691	175.9 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
81720	181.0 to 210.6 feet	Key Note Segment		5 ft	148			
81664	195.9 to 196.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
81692	221.7 to 242.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
81665	226.5 to 227.5 feet	**Vertical Change**	-.6"	5 ft	5	REF		
81721	242.5 to 276.9 feet	Key Note Segment		5 ft	172			
81667	253.6 to 254.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
81668	301.5 to 302.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
81669	343.4 to 344.4 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
81670	352.1 to 353.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
81671	364.4 to 365.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112151048	INDEPENDENCE DRIVE	1951 INDEPENDENCE	VICTORY LANE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81672	384.6 to 385.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
81673	394.9 to 395.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
81674	405.1 to 406.1 feet	Vertical Change	.49"	5 ft	5	LF	$75	$375
81693	410.9 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
81694	427.3 to 428.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
81675	430.1 to 431.1 feet	Vertical Change	.29"	5 ft	5	REF		
81695	430.8 to 432.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
81696	439.3 to 441.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
81697	479.2 to 481.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
81698	511.1 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,620
81699	522.8 to 526.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
81700	529.8 to 536.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
81701	550.7 to 552.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$780
81702	557.8 to 561.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
81703	591.5 to 595.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
81704	623.3 to 625.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
81705	627.6 to 632.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820
81706	634.5 to 635.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
81707	635.5 to 641.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
81676	638.9 to 639.9 feet	Vertical Change	1.69"	5 ft	5	REF		
81708	650.9 to 651.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
81709	653.3 to 655.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
81710	659.2 to 661.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
81711	694.3 to 696.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
81712	700.4 to 704.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
81713	717.1 to 720.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
81714	723.2 to 738.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
81715	743.4 to 749.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2112151048	INDEPENDENCE DRIVE	1951 INDEPENDENCE	VICTORY LANE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81716	758.4 to 765.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
81717	785.3 to 789.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81718	799.1 to 807.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
81677	804.4 to 805.4 feet	**Vertical Change**	-.53"	5 ft	5	REF		
81719	809.5 to 810.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N/W/S *side of* **INDEPENDENCE DRIVE** *Starting at:* **1951 INDEPENDENCE DRIVE** **$114,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151042	INDEPENDENCE DRIVE	1955 INDEPENDENCE	1951 INDEPENDENCE DRIVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81658	3.1 to 33.9 feet	Key Note Segment		5 ft	154			
81622	12.2 to 13.2 feet	Vertical Change	.35"	5 ft	5	REF		
81633	35.4 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
81634	44.0 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
81623	52.4 to 53.4 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
81635	53.7 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
81624	60.5 to 61.5 feet	Vertical Change	.56"	5 ft	5	SF	$75	$375
81636	73.9 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
81637	82.2 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060
81638	107.5 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
81639	120.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
81640	142.9 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
81625	151.3 to 152.3 feet	Vertical Change	-.43"	5 ft	5	LF	$75	$375
81626	160.1 to 161.1 feet	Vertical Change	.47"	5 ft	5	LF	$75	$375
81641	170.3 to 174.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
81627	177.7 to 178.7 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
81642	190.3 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
81628	191.1 to 192.1 feet	Vertical Change	.78"	5 ft	5	REF		
81629	195.8 to 196.8 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
81643	203.7 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
81644	227.8 to 230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
81645	238.8 to 240.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
81659	240.9 to 283.2 feet	Key Note Segment		5 ft	212			
81630	259.3 to 260.3 feet	Vertical Change	1.11"	5 ft	5	REF		
81646	289.9 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
81647	328.8 to 331.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
81648	351.4 to 356.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
81649	366.3 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151042	INDEPENDENCE DRIVE	1955 INDEPENDENCE	1951 INDEPENDENCE DRIVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81650	376.4 to 379.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
81651	401.3 to 402.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81652	414.4 to 415.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81631	419.6 to 420.6 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
81653	441.3 to 444.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
81654	446.4 to 450.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
81655	453.6 to 457.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
81656	459.2 to 462.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
81657	469.4 to 485.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
81632	474.8 to 475.8 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **INDEPENDENCE DRIVE** *Starting at:* **1955 INDEPENDENCE DRIVE** **$65,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151156	INDEPENDENCE DRIVE	PINE ST	PRIVATE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82243	1.7 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
82244	13.8 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82245	19.9 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
82246	25.3 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
82247	34.0 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
82248	44.3 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82249	49.6 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
82250	59.9 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
82251	85.8 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
82252	95.8 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
82253	104.0 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82254	116.2 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
82298	118.7 to 120.1 feet		5.0-6.0%	5 ft	7			
82255	123.7 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
82256	140.6 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82257	174.3 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82258	180.4 to 184.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
82259	209.8 to 213.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
82260	215.8 to 222.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
82261	227.6 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
82262	232.7 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
82263	249.5 to 253.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
82264	263.2 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
82265	282.8 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
82236	295.8 to 296.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
82266	303.0 to 306.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
82267	310.0 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
82268	317.4 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151156	INDEPENDENCE DRIVE	PINE ST	PRIVATE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82269	336.6 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
82270	346.0 to 371.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
82271	375.3 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
82272	387.9 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82273	397.3 to 402.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
82274	409.3 to 411.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
82275	419.2 to 420.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82276	428.2 to 437.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
82277	441.5 to 448.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
82278	467.4 to 477.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
82279	485.2 to 487.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82280	495.8 to 499.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82281	510.5 to 514.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
82237	544.3 to 545.3 feet	**Vertical Change**	2.38"	5 ft	5	SF	$75	**$375**
82282	546.0 to 549.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82283	557.9 to 564.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
82238	572.2 to 573.2 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
82284	576.0 to 580.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
82285	587.7 to 612.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
82239	606.2 to 607.2 feet	**Vertical Change**	3.45"	5 ft	5	REF		
82286	614.3 to 629.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
82287	633.5 to 637.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
82288	644.3 to 646.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82289	648.6 to 649.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82290	655.0 to 665.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
82240	661.9 to 662.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
82291	668.3 to 677.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
82292	683.4 to 686.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151156	INDEPENDENCE DRIVE	PINE ST	PRIVATE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82293	689.2 to 693.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
82294	696.8 to 698.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82295	722.7 to 726.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
82296	726.3 to 727.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82297	733.6 to 740.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
82242	735.2 to 736.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **INDEPENDENCE DRIVE** *Starting at:* **PINE ST** **$201,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151134	INDEPENDENCE DRIVE	VICTORY LANE	PINE ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81993	0.4 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81994	5.3 to 9.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81995	11.7 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
81979	14.2 to 15.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
82069	26.3 to 27.5 feet		5.0-6.0%	5 ft	6			
81996	35.5 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
81997	42.2 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
81998	50.8 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
81999	57.3 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
82000	73.9 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
82001	86.5 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82002	91.5 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
82003	120.5 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
81980	128.4 to 129.4 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
82004	159.9 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
82005	165.6 to 169.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
82006	179.3 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82007	186.0 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82008	224.3 to 226.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
82009	232.9 to 244.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
82010	274.1 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
82011	282.7 to 285.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
82012	298.1 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82013	308.9 to 312.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81981	316.2 to 317.2 feet	**Vertical Change**	3.34"	5 ft	5	SF	$75	**$375**
82014	321.6 to 325.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
82015	331.3 to 332.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82016	337.2 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151134	INDEPENDENCE DRIVE	VICTORY LANE	PINE ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81982	338.1 to 339.1 feet	Vertical Change	.39"	5 ft	5	REF		
82017	350.2 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82018	356.3 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
82019	369.8 to 383.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
82020	393.2 to 394.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82021	398.0 to 412.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
82022	426.8 to 433.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
81983	431.2 to 432.2 feet	Vertical Change	1.78"	5 ft	5	REF		
82023	437.9 to 439.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82024	451.7 to 455.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81984	474.4 to 475.4 feet	Vertical Change	2.8"	5 ft	5	SF	$75	**$375**
82025	492.5 to 493.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82026	508.4 to 509.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82027	520.8 to 523.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
82028	529.1 to 530.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82029	537.8 to 543.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
82030	549.9 to 551.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
82031	551.7 to 553.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82032	557.2 to 558.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82033	562.8 to 566.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82034	582.7 to 595.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
82035	597.8 to 603.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
82036	605.4 to 607.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82037	610.8 to 611.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82038	616.5 to 619.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
82039	622.5 to 640.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,980**
82040	658.2 to 670.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
81985	659.7 to 660.7 feet	Vertical Change	-.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151134	INDEPENDENCE DRIVE	VICTORY LANE	PINE ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82041	674.4 to 719.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,880**
81986	682.6 to 683.6 feet	**Vertical Change**	1.16"	5 ft	5	REF		
82042	724.6 to 733.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
82043	739.2 to 760.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
82044	793.3 to 805.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
81987	817.7 to 818.7 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
82045	820.3 to 827.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
82046	831.4 to 851.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
81988	834.6 to 835.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
81989	843.2 to 844.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
82047	858.7 to 861.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
82048	869.6 to 882.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
82049	890.9 to 896.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
82050	899.5 to 910.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
82051	915.1 to 917.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
81990	919.8 to 920.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
82052	921.2 to 922.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82053	926.6 to 930.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82054	936.3 to 939.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82055	942.7 to 945.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
82056	957.3 to 960.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82057	969.0 to 972.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
82058	978.5 to 979.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
82059	982.7 to 990.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
82060	997.0 to 998.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82061	1004.0 to 1013.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
81991	1008.2 to 1009.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
82062	1017.0 to 1018.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151134	INDEPENDENCE DRIVE	VICTORY LANE	PINE ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82063	1020.9 to 1022.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82064	1027.1 to 1044.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
82065	1052.3 to 1054.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82066	1056.8 to 1058.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82067	1058.6 to 1069.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
81992	1070.0 to 1071.0 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
82068	1072.4 to 1074.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **INDEPENDENCE DRIVE** *Starting at:* **VICTORY LANE** **$269,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111207	INDIGO DR	2275 INDIGO DR	2305 INDIGO DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133072	0.4 to 1.4 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
133073	2.2 to 3.2 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
133076	4.5 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
133074	5.1 to 9.8 feet	Vertical Change	.54"	5 ft	24	REF		
133077	12.2 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
133078	15.2 to 16.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
133079	18.4 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
133075	20.4 to 21.4 feet	Vertical Change	1.75"	5 ft	5	SF	$75	$375
133090	21.2 to 39.9 feet	Key Note Segment		5 ft	94			
133080	44.3 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
133091	46.7 to 65.5 feet	Key Note Segment		5 ft	94			
133081	68.4 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	$7,500
133082	82.0 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
133083	86.9 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
133084	93.4 to 95.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
133085	96.2 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
133092	107.4 to 126.4 feet	Key Note Segment		5 ft	95			
133086	130.0 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
133093	133.1 to 152.1 feet	Key Note Segment		5 ft	95			
133087	153.7 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
133088	168.3 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
133089	181.6 to 183.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900

TOTAL COST FOR: E *side of* **INDIGO DR** *Starting at:* **2275 INDIGO DR** **$32,565.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111209	INDIGO DR	2305 INDIGO DR	UMBER DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133099	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
133100	4.3 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
133101	8.2 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
133115	10.0 to 28.8 feet	Key Note Segment		5 ft	94			
133102	28.9 to 29.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
133103	33.0 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
133116	35.7 to 54.5 feet	Key Note Segment		5 ft	94			
133104	56.8 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	165	SF	$120	**$19,800**
133105	91.1 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
133117	94.9 to 114.8 feet	Key Note Segment		5 ft	100			
133106	115.5 to 116.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
133107	117.2 to 119.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
133118	121.3 to 140.8 feet	Key Note Segment		5 ft	98			
133108	144.5 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
133094	151.2 to 152.2 feet	**Vertical Change**	.56"	5 ft	5	REF		
133095	157.7 to 158.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
133109	161.0 to 170.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
133110	174.0 to 184.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
133119	185.9 to 205.3 feet	Key Note Segment		5 ft	97			
133096	189.2 to 190.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
133111	207.5 to 217.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
133112	217.6 to 233.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
133120	233.2 to 252.8 feet	Key Note Segment		5 ft	98			
133113	257.9 to 259.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
133121	259.8 to 278.7 feet	Key Note Segment		5 ft	95			
133097	269.7 to 270.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
133114	281.5 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
133098	282.3 to 283.3 feet	**Vertical Change**	.66"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111209	INDIGO DR	2305 INDIGO DR	UMBER DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **INDIGO DR**	*Starting at:* **2305 INDIGO DR**						**$68,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111205	INDIGO DR	SCARLET DR	2020 INDIGO DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133054	1.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
133065	6.0 to 24.8 feet	Key Note Segment		5 ft	94			
133034	6.1 to 7.1 feet	**Vertical Change**	.54"	5 ft	5	REF		
133055	26.9 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133066	30.8 to 50.0 feet	Key Note Segment		5 ft	96			
133035	41.3 to 42.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
133056	53.4 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
133057	59.1 to 65.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
133036	62.7 to 65.4 feet	**Vertical Change**	.29"	5 ft	14	REF		
133037	66.3 to 67.3 feet	**Vertical Change**	.9"	5 ft	5	SF	$75	**$375**
133058	69.6 to 72.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
133059	74.1 to 77.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
133067	77.1 to 96.4 feet	Key Note Segment		5 ft	97			
133071	96.4 to 97.8 feet		5.0-6.0%	5 ft	7			
133038	97.3 to 101.7 feet	**Vertical Change**	.26"	5 ft	22	LF	$75	**$1,650**
133068	103.6 to 122.1 feet	Key Note Segment		5 ft	93			
133039	103.8 to 104.8 feet	**Vertical Change**	3.33"	5 ft	5	REF		
133040	118.2 to 119.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
133060	124.7 to 125.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
133061	126.2 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
133062	129.8 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
133041	138.4 to 139.4 feet	**Vertical Change**	.66"	5 ft	5	REF		
133042	142.4 to 143.4 feet	**Vertical Change**	.53"	5 ft	5	REF		
133043	147.6 to 148.6 feet	**Vertical Change**	.58"	5 ft	5	REF		
133044	151.5 to 152.5 feet	**Vertical Change**	3.33"	5 ft	5	REF		
133045	156.2 to 157.2 feet	**Vertical Change**	3.06"	5 ft	5	REF		
133046	157.9 to 158.9 feet	**Vertical Change**	-1.66"	5 ft	5	SF	$75	**$375**
133047	159.6 to 160.6 feet	**Vertical Change**	1.2"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202111205	INDIGO DR	SCARLET DR	2020 INDIGO DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133063	160.8 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
133048	163.5 to 164.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
133049	165.3 to 166.3 feet	**Vertical Change**	-.56"	5 ft	5	REF		
133050	167.1 to 168.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
133051	172.6 to 173.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
133069	172.7 to 191.6 feet	Key Note Segment		5 ft	95			
133052	191.9 to 192.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
133064	193.6 to 196.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
133070	198.3 to 213.1 feet	Key Note Segment		5 ft	74			
133053	198.8 to 199.8 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **INDIGO DR** *Starting at:* **SCARLET DR** **$42,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111245	INDIGO DR	SEPIA CT	SCARLET DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133325	0.1 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
133326	25.8 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
133327	41.1 to 46.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
133328	46.1 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
133329	59.4 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
133330	67.5 to 68.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
133331	71.8 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
133332	81.0 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	216	SF	$120	**$25,860**
133324	81.8 to 82.8 feet	**Vertical Change**	1.13"	5 ft	5	REF		
133333	127.9 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
133334	148.3 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: W *side of* **INDIGO DR** *Starting at:* **SEPIA CT** **$61,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251049	INDUSTRIAL AVE	SCHNOOR AVE	2300 INDUSTRIAL AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107797	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	$4,128
107785	5.1 to 6.1 feet	Vertical Change	.26"	8 ft	8	LF	$75	$600
107798	7.7 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	13	SF	$120	$1,536
107829	9.4 to 26.1 feet	Key Note Segment		8 ft	134			
107799	27.5 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	74	SF	$120	$8,928
107800	37.4 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	$1,152
107801	40.8 to 50.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	78	SF	$120	$9,312
107786	65.5 to 66.5 feet	Vertical Change	.26"	8 ft	8	LF	$75	$600
107787	67.5 to 68.5 feet	Vertical Change	1.06"	8 ft	8	SF	$75	$600
107802	76.0 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	$3,168
107803	88.3 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	62	SF	$120	$7,392
107830	88.3 to 89.3 feet	Protruding Object	72"	8 ft	8	JOB	$99	$99
107788	89.0 to 90.0 feet	Vertical Change	.29"	8 ft	8	REF		
107789	92.8 to 93.8 feet	Vertical Change	1.41"	8 ft	8	REF		
107804	96.4 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	$1,632
107805	132.6 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	61	SF	$120	$7,296
107790	167.5 to 168.5 feet	Vertical Change	.26"	8 ft	8	REF		
107806	168.0 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	98	SF	$120	$11,808
107791	181.4 to 182.4 feet	Vertical Change	.28"	8 ft	8	REF		
107807	181.7 to 189.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	63	SF	$120	$7,584
107808	189.9 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	63	SF	$120	$7,584
107809	202.3 to 205.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	24	SF	$120	$2,880
107810	208.1 to 224.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	129	SF	$120	$15,456
107811	224.2 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	81	SF	$120	$9,696
107812	234.3 to 266.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	260	SF	$120	$31,200
107813	266.8 to 269.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	$2,880
107792	267.7 to 268.7 feet	Vertical Change	.28"	8 ft	8	REF		
107814	270.8 to 277.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	52	SF	$120	$6,240

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251049	INDUSTRIAL AVE	SCHNOOR AVE	2300 INDUSTRIAL AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107815	277.7 to 297.6 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	159	SF	$120	**$19,104**
107816	299.9 to 305.1 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	42	SF	$120	**$4,992**
107817	305.1 to 319.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	114	SF	$120	**$13,632**
107793	318.8 to 319.8 feet	**Vertical Change**	.29"	8 ft	8	REF		
107818	319.3 to 320.4 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	9	SF	$120	**$1,056**
107819	322.8 to 330.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	61	SF	$120	**$7,296**
107820	332.7 to 337.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	38	SF	$120	**$4,512**
107821	337.7 to 356.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	153	SF	$120	**$18,336**
107794	353.4 to 354.4 feet	**Vertical Change**	.33"	8 ft	8	REF		
107822	358.9 to 366.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	59	SF	$120	**$7,104**
107823	367.7 to 382.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	119	SF	$120	**$14,304**
107824	385.5 to 388.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	22	SF	$120	**$2,688**
107825	404.7 to 408.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,032**
107826	408.9 to 424.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	122	SF	$120	**$14,688**
107827	427.3 to 428.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	8	SF	$120	**$960**
107828	449.6 to 457.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	62	SF	$120	**$7,488**
107831	454.0 to 456.3 feet		5.0-6.0%	8 ft	18			
107832	454.0 to 456.3 feet	Running Slope	5.0-6.0%	8 ft	18	SF	$120	**$2,208**
107833	456.3 to 457.3 feet		6.0-7.0%	8 ft	8			

TOTAL COST FOR: N *side of* **INDUSTRIAL AVE** *Starting at:* **SCHNOOR AVE** **$264,171.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / S	2109141042	IRONWOOD WAY	FOXGLOVE WAY	N SCHNOOR AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65247	0.7 to 2.1 feet		5.0-6.0%	5 ft	7			
65185	3.4 to 9.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
65186	18.8 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
65229	23.4 to 37.6 feet	Key Note Segment		5 ft	71			
65187	38.3 to 41.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$580**
65188	43.4 to 48.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
65230	48.5 to 63.8 feet	Key Note Segment		5 ft	77			
65189	64.3 to 66.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
65161	68.0 to 71.0 feet	**Vertical Change**	.28"	5 ft	15	LF	$75	**$1,125**
65162	77.8 to 78.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
65190	78.7 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
65191	87.4 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
65231	91.3 to 105.8 feet	Key Note Segment		5 ft	73			
65192	105.8 to 112.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
65193	114.6 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
65232	135.4 to 149.8 feet	Key Note Segment		5 ft	72			
65163	149.6 to 150.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
65164	153.0 to 154.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
65194	156.3 to 162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
65165	157.2 to 158.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
65166	162.1 to 163.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
65167	167.5 to 171.2 feet	**Vertical Change**	-.3"	5 ft	19	LF	$75	**$1,388**
65195	169.0 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
65233	177.9 to 191.9 feet	Key Note Segment		5 ft	70			
65196	191.9 to 195.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	19	SF	$40	**$760**
65197	196.2 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
65234	227.6 to 241.4 feet	Key Note Segment		5 ft	69			
65168	228.3 to 229.3 feet	**Vertical Change**	.57"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / S	2109141042	IRONWOOD WAY	FOXGLOVE WAY	N SCHNOOR AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65169	242.5 to 243.5 feet	Vertical Change	.59"	5 ft	5	SF	$75	$375
65198	246.0 to 247.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
65199	247.6 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
65170	250.7 to 251.7 feet	Vertical Change	-.37"	5 ft	5	REF		
65235	261.4 to 275.8 feet	Key Note Segment		5 ft	72			
65171	276.9 to 277.9 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
65200	279.0 to 280.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
65236	290.3 to 308.5 feet	Key Note Segment		5 ft	91			
65172	290.8 to 291.8 feet	Vertical Change	.35"	5 ft	5	REF		
65173	295.2 to 296.2 feet	Vertical Change	.35"	5 ft	5	REF		
65201	321.0 to 327.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
65202	334.8 to 338.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
65237	341.6 to 355.1 feet	Key Note Segment		5 ft	68			
65203	356.6 to 357.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
65204	359.6 to 360.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
65205	362.8 to 371.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	$5,400
65206	371.8 to 377.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
65207	379.3 to 382.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
65208	385.0 to 386.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
65238	386.6 to 399.8 feet	Key Note Segment		5 ft	66			
65175	390.9 to 391.9 feet	Vertical Change	.35"	5 ft	5	REF		
65209	400.8 to 403.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
65210	406.4 to 419.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
65176	406.8 to 407.8 feet	Vertical Change	.32"	5 ft	5	REF		
65177	414.4 to 415.4 feet	Vertical Change	-.26"	5 ft	5	REF		
65211	423.3 to 427.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
65239	428.8 to 442.4 feet	Key Note Segment		5 ft	68			
65178	457.9 to 458.9 feet	Vertical Change	.79"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / S	2109141042	IRONWOOD WAY	FOXGLOVE WAY	N SCHNOOR AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65240	471.2 to 485.2 feet	Key Note Segment		5 ft	70			
65212	485.2 to 486.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$220
65213	487.3 to 489.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
65214	505.5 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,980
65241	514.2 to 528.8 feet	Key Note Segment		5 ft	73			
65215	528.8 to 532.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	$800
65216	535.3 to 542.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
65217	545.5 to 546.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
65218	549.2 to 556.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,500
65242	557.3 to 572.1 feet	Key Note Segment		5 ft	74			
65219	572.1 to 576.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	23	SF	$40	$900
65243	601.3 to 615.7 feet	Key Note Segment		5 ft	72			
65220	619.2 to 620.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
65221	630.8 to 633.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
65244	643.6 to 657.6 feet	Key Note Segment		5 ft	70			
65222	658.5 to 680.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	108	SF	$40	$4,300
65179	659.3 to 660.3 feet	Vertical Change	.45"	5 ft	5	REF		
65223	680.9 to 685.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
65245	686.1 to 699.8 feet	Key Note Segment		5 ft	69			
65180	687.1 to 688.1 feet	Vertical Change	.69"	5 ft	5	REF		
65224	701.9 to 705.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
65181	707.9 to 708.9 feet	Vertical Change	-.75"	5 ft	5	SF	$75	$375
65225	711.6 to 713.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
65182	714.4 to 715.4 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
65226	715.7 to 719.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
65227	719.8 to 724.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
65246	724.4 to 738.9 feet	Key Note Segment		5 ft	73			
65183	725.4 to 726.4 feet	Vertical Change	-.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / S	2109141042	IRONWOOD WAY	FOXGLOVE WAY	N SCHNOOR AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65228	740.3 to 758.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
65184	742.4 to 743.4 feet	**Vertical Change**	3.55"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W / S *side of* **IRONWOOD WAY** *Starting at:* **FOXGLOVE WAY** **$129,297.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / E	2109141046	IRONWOOD WAY	N SCHNOOR AVE	FOXGLOVE WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65270	1.1 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
65271	5.1 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
65272	12.4 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
65273	23.3 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	203	SF	$120	**$24,300**
65248	38.1 to 39.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
65249	63.5 to 64.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
65274	66.8 to 75.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
65275	77.7 to 87.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
65250	96.1 to 97.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
65251	102.3 to 103.3 feet	**Vertical Change**	-2.4"	5 ft	5	SF	$75	**$375**
65309	107.3 to 122.0 feet	Key Note Segment		5 ft	74			
65276	122.8 to 124.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
65277	126.4 to 149.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,860**
65310	150.0 to 164.9 feet	Key Note Segment		5 ft	75			
65278	165.4 to 171.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**
65279	171.4 to 192.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
65252	179.0 to 180.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
65311	192.6 to 215.7 feet	Key Note Segment		5 ft	116			
65253	194.0 to 195.0 feet	**Vertical Change**	.64"	5 ft	5	REF		
65254	209.1 to 216.0 feet	**Vertical Change**	.38"	5 ft	35	REF		
65280	217.5 to 218.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
65281	218.9 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
65282	226.8 to 234.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
65283	234.4 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
65312	236.3 to 251.7 feet	Key Note Segment		5 ft	77			
65255	237.6 to 238.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
65284	255.2 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
65285	277.8 to 279.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / E	2109141046	IRONWOOD WAY	N SCHNOOR AVE	FOXGLOVE WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65313	279.2 to 293.9 feet	Key Note Segment		5 ft	73			
65286	293.9 to 298.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	$1,000
65287	302.7 to 314.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	$7,260
65288	317.6 to 321.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,580
65314	322.8 to 336.3 feet	Key Note Segment		5 ft	68			
65289	336.3 to 340.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	21	SF	$40	$840
65257	350.8 to 351.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
65258	358.3 to 359.3 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
65315	366.5 to 381.0 feet	Key Note Segment		5 ft	73			
65259	369.3 to 370.3 feet	Vertical Change	.47"	5 ft	5	REF		
65290	381.0 to 386.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,160
65291	390.3 to 392.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
65292	395.6 to 397.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
65293	399.0 to 402.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	$1,980
65294	405.2 to 408.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	16	SF	$120	$1,920
65295	409.5 to 410.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600
65296	411.8 to 417.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,120
65260	417.2 to 418.2 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
65297	418.3 to 419.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
65298	420.3 to 429.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
65261	427.6 to 428.6 feet	Vertical Change	.4"	5 ft	5	REF		
65262	433.2 to 434.2 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
65263	434.9 to 435.9 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
65299	437.7 to 442.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
65264	445.1 to 448.2 feet	Vertical Change	.52"	5 ft	16	SF	$75	$1,163
65265	451.7 to 457.0 feet	Vertical Change	.27"	5 ft	27	LF	$75	$1,988
65300	455.3 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
65301	470.8 to 475.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / E	2109141046	IRONWOOD WAY	N SCHNOOR AVE	FOXGLOVE WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65266	475.3 to 476.3 feet	Vertical Change	.28"	5 ft	5	REF		
65302	481.0 to 492.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
65317	493.5 to 495.0 feet		8.0-9.0%	5 ft	8			
65267	494.3 to 495.3 feet	Vertical Change	.59"	5 ft	5	SF	$75	**$375**
65316	508.6 to 537.8 feet	Key Note Segment		5 ft	146			
65303	537.8 to 539.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$300**
65304	547.4 to 552.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
65305	563.6 to 567.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
65306	567.3 to 569.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
65307	572.6 to 580.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
65268	578.7 to 579.7 feet	Vertical Change	.33"	5 ft	5	REF		
65269	591.7 to 592.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
65308	603.8 to 610.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: N / E *side of* **IRONWOOD WAY** *Starting at:* **N SCHNOOR AVE** **$147,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171022	ISLA VISTA CT	3756 ISLA VISTA CT	CAITLAN DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88583	3.3 to 7.7 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	22	SF	$120	**$2,640**
88584	9.3 to 14.0 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	23	SF	$120	**$2,820**
88585	14.9 to 20.3 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	27	SF	$120	**$3,240**
88586	20.5 to 23.8 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	17	SF	$120	**$1,980**
88587	28.8 to 29.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
88588	32.1 to 35.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
88572	37.4 to 38.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
88589	38.3 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
88590	44.8 to 47.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
88573	50.3 to 51.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
88623	50.7 to 70.3 feet	Key Note Segment		5 ft	98			
88591	71.8 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
88574	73.9 to 74.9 feet	**Vertical Change**	1.01"	5 ft	5	REF		
88575	75.5 to 76.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
88592	76.8 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88593	79.3 to 91.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
88594	91.4 to 93.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
88595	93.2 to 108.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	75	SF	$120	**$8,940**
88596	110.5 to 125.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
88576	112.9 to 113.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
88633	123.8 to 125.1 feet		5.0-6.0%	5 ft	7			
88597	127.3 to 131.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
88624	131.8 to 152.1 feet	Key Note Segment		5 ft	101			
88598	153.8 to 157.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
88625	157.4 to 181.5 feet	Key Note Segment		5 ft	121			
88577	182.1 to 183.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
88599	185.8 to 188.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
88600	191.4 to 195.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171022	ISLA VISTA CT	3756 ISLA VISTA CT	CAITLAN DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88601	197.1 to 201.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
88602	220.7 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
88603	228.0 to 231.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88626	232.2 to 253.3 feet	Key Note Segment		5 ft	106			
88604	255.2 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
88627	258.8 to 281.8 feet	Key Note Segment		5 ft	115			
88605	286.9 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
88579	294.6 to 295.6 feet	**Vertical Change**	2.25"	5 ft	5	SF	$75	**$375**
88606	296.1 to 298.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
88628	298.2 to 319.0 feet	Key Note Segment		5 ft	104			
88607	320.0 to 323.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
88608	342.6 to 346.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
88609	356.1 to 358.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
88610	358.1 to 364.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
88580	365.5 to 366.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
88611	367.3 to 373.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
88629	373.6 to 393.8 feet	Key Note Segment		5 ft	101			
88612	395.8 to 399.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
88630	401.2 to 430.3 feet	Key Note Segment		5 ft	146			
88613	432.7 to 447.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
88614	447.8 to 456.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
88615	456.4 to 468.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
88631	468.5 to 498.6 feet	Key Note Segment		5 ft	151			
88616	499.0 to 505.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	30	SF	$40	**$1,200**
88632	505.0 to 526.3 feet	Key Note Segment		5 ft	106			
88617	530.8 to 533.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
88618	533.9 to 546.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
88582	538.4 to 539.4 feet	**Vertical Change**	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171022	ISLA VISTA CT	3756 ISLA VISTA CT	CAITLAN DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88619	546.6 to 553.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
88620	555.7 to 562.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,140**
88621	562.6 to 570.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
88634	571.8 to 574.5 feet		5.0-6.0%	5 ft	14			
88635	571.8 to 574.5 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
88622	572.4 to 574.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: S/E/N *side of* **ISLA VISTA CT** *Starting at:* **3756 ISLA VISTA CT** **$131,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171051	ISLA VISTA CT	886 ISLA VISTA CT	CAITLAN DR	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88874	0.4 to 35.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
88873	1.1 to 2.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
88875	42.9 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
88876	51.5 to 62.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
88877	67.7 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
88878	74.4 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
88879	88.0 to 89.6 feet		5.0-6.0%	5 ft	8			
88880	89.6 to 90.7 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: S *side of* **ISLA VISTA CT** *Starting at:* **886 ISLA VISTA CT** **$40,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171049	ISLA VISTA CT	CAITLAN DR	902 ISLA VISTA CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88863	0.0 to 10.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
88864	10.9 to 12.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
88865	13.8 to 18.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
88861	21.6 to 22.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
88866	21.8 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
88867	32.9 to 42.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
88868	44.6 to 50.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
88869	51.8 to 60.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
88870	60.5 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88871	64.8 to 84.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
88862	74.4 to 75.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
88872	86.3 to 98.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**

TOTAL COST FOR: N *side of* **ISLA VISTA CT** *Starting at:* **CAITLAN DR** **$47,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171017	ISLA VISTA CT	CAITLAN DR	3772 ISLA VISTA CT	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88568	0.2 to 6.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
88571	6.7 to 25.9 feet	Key Note Segment		5 ft	96			
88567	16.8 to 17.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
88569	27.3 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
88570	31.9 to 33.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **ISLA VISTA CT** *Starting at:* **CAITLAN DR** **$6,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111319	IVORY CT	1924 IVORY CT	1974 IVORY CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133414	1.2 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
133405	9.4 to 10.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
133415	21.2 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
133406	23.2 to 24.2 feet	Vertical Change	.61"	5 ft	5	SF	$75	$375
133416	26.7 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
133417	37.3 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
133430	42.2 to 61.2 feet	Key Note Segment		5 ft	95			
133418	63.7 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
133431	68.3 to 87.1 feet	Key Note Segment		5 ft	94			
133407	87.9 to 88.9 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
133419	89.3 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
133420	95.1 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
133421	101.5 to 106.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
133422	107.3 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
133423	111.8 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
133424	121.6 to 129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,620
133432	131.1 to 149.7 feet	Key Note Segment		5 ft	93			
133425	152.3 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
133408	154.6 to 155.6 feet	Vertical Change	2.82"	5 ft	5	REF		
133409	161.7 to 162.7 feet	Vertical Change	.27"	5 ft	5	REF		
133433	163.3 to 181.3 feet	Key Note Segment		5 ft	90			
133410	168.5 to 169.5 feet	Vertical Change	3.23"	5 ft	5	REF		
133426	183.3 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	$7,500
133411	192.8 to 193.8 feet	Vertical Change	.52"	5 ft	5	REF		
133427	198.0 to 214.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
133428	217.6 to 220.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
133434	220.0 to 239.7 feet	Key Note Segment		5 ft	99			
133412	223.1 to 224.1 feet	Vertical Change	-.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111319	IVORY CT	1924 IVORY CT	1974 IVORY CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133413	241.3 to 242.3 feet	Vertical Change	.39"	5 ft	5	REF		
133429	241.3 to 247.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: S *side of* **IVORY CT** *Starting at:* **1924 IVORY CT** **$60,105.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111325	IVORY CT	1945 IVORY CT	AZURE DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133479	0.0 to 17.1 feet	Key Note Segment		5 ft	86			
133474	20.7 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
133480	26.6 to 44.6 feet	Key Note Segment		5 ft	90			
133475	46.8 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
133476	81.4 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
133473	83.3 to 84.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
133481	83.6 to 101.4 feet	Key Note Segment		5 ft	89			
133477	103.2 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
133482	118.5 to 137.0 feet	Key Note Segment		5 ft	93			
133478	139.5 to 152.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**

TOTAL COST FOR: N *side of* **IVORY CT** *Starting at:* **1945 IVORY CT** **$33,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111324	IVORY CT	1975 IVORY CT	1945 IVORY CT	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133470	0.8 to 20.3 feet	Key Note Segment		5 ft	98			
133460	1.2 to 2.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
133462	22.3 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133463	28.7 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
133471	58.8 to 78.0 feet	Key Note Segment		5 ft	96			
133461	59.6 to 60.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
133464	81.9 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
133472	92.3 to 111.2 feet	Key Note Segment		5 ft	95			
133465	112.3 to 113.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
133466	115.2 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
133467	135.8 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
133468	141.2 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
133469	145.0 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **IVORY CT** *Starting at:* **1975 IVORY CT** **$41,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111321	IVORY CT	1984 IVORY CT	1996 IVORY CT	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133436	0.8 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
133437	13.8 to 22.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
133438	23.6 to 30.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
133439	32.6 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
133441	35.2 to 54.5 feet	Key Note Segment		5 ft	96			
133442	81.9 to 102.5 feet	Key Note Segment		5 ft	103			
133435	83.4 to 84.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
133440	106.8 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: S *side of* **IVORY CT** *Starting at:* **1984 IVORY CT** **$21,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111322	IVORY CT	1997 IVORY CT	1985 IVORY CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133452	0.1 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
133443	0.3 to 1.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
133453	9.4 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
133457	17.3 to 35.3 feet	Key Note Segment		5 ft	90			
133444	17.5 to 18.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
133445	36.5 to 37.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
133454	44.7 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
133446	52.6 to 53.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
133458	62.0 to 79.7 feet	Key Note Segment		5 ft	89			
133447	62.4 to 63.4 feet	**Vertical Change**	-.55"	5 ft	5	REF		
133448	71.6 to 72.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
133449	80.8 to 81.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
133455	101.0 to 112.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
133456	114.3 to 132.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
133459	132.8 to 150.8 feet	Key Note Segment		5 ft	90			
133450	133.3 to 134.3 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **IVORY CT** *Starting at:* **1997 IVORY CT** **$31,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111316	IVORY CT	AZURE DR	1914 IVORY CT	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133401	0.0 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
133404	11.8 to 29.8 feet	Key Note Segment		5 ft	90			
133400	12.4 to 13.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
133402	35.3 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
133403	39.5 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: S *side of* **IVORY CT** *Starting at:* **AZURE DR** **$10,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181604	IVY GLEN DR	BENT OAK TR	DIAMANTE LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102125	0.0 to 3.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
102126	5.8 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
102116	23.4 to 24.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
102127	27.8 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
102128	45.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102129	51.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
102117	56.3 to 57.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
102130	61.3 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
102131	70.5 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
102118	73.7 to 74.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
102132	80.8 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102133	89.5 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
102134	97.3 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
102119	99.5 to 100.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
102135	111.7 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
102136	122.7 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
102120	129.4 to 130.4 feet	**Vertical Change**	.93"	5 ft	5	REF		
102121	133.7 to 134.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
102137	133.8 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102138	138.9 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102122	141.9 to 142.9 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
102123	145.0 to 146.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
102139	146.6 to 149.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
102124	149.3 to 150.3 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **IVY GLEN DR** *Starting at:* **BENT OAK TR** **$56,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181634	IVY GLEN DR	BOLINAS WAY	COLIMA AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102258	29.2 to 30.2 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
102260	42.1 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
102261	47.3 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
102262	65.8 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
102263	78.8 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
102264	86.4 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
102265	94.3 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
102266	110.3 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
102267	124.9 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
102268	135.9 to 139.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
102269	148.2 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
102259	149.5 to 150.5 feet	Vertical Change	.42"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **IVY GLEN DR** *Starting at:* **BOLINAS WAY** **$21,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181649	IVY GLEN DR	COLIMA AVE	RUBICON AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102329	0.0 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
102330	5.7 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
102331	38.0 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102324	44.2 to 45.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
102332	44.4 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
102333	58.7 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
102334	82.6 to 93.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
102325	83.8 to 84.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
102335	94.4 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102336	98.3 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
102337	119.8 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
102326	123.1 to 124.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
102338	133.3 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
102339	144.0 to 149.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
102327	148.8 to 149.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
102340	160.3 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
102328	166.0 to 167.0 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **IVY GLEN DR** *Starting at:* **COLIMA AVE** **$35,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181619	IVY GLEN DR	ORCHARD HILL DR	BOLINAS WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102204	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
102205	4.8 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
102199	12.5 to 13.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
102206	30.3 to 32.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
102207	35.0 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
102200	37.7 to 38.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
102208	53.3 to 64.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
102209	64.3 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
102210	68.1 to 69.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102211	72.8 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
102201	77.7 to 78.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
102212	80.8 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	338	SF	$120	**$40,500**
102202	91.0 to 92.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
102203	124.9 to 125.9 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **IVY GLEN DR** *Starting at:* **ORCHARD HILL DR** **$76,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181712	IVY GLEN DR	RUBICON AVE	BENT OAK TR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102439	2.8 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
102411	4.9 to 5.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
102440	13.5 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102441	24.9 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
102412	33.2 to 34.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
102442	34.4 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102443	37.6 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102444	64.3 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
102413	64.8 to 65.8 feet	**Vertical Change**	2.55"	5 ft	5	REF		
102445	76.0 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
102446	81.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
102447	93.9 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
102448	118.8 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
102415	120.9 to 121.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
102449	137.3 to 157.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
102450	174.1 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
102451	184.5 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102416	186.8 to 187.8 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
102452	205.8 to 206.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
102453	209.2 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102417	219.1 to 220.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
102454	222.3 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
102455	236.1 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
102456	242.2 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
102418	243.2 to 244.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
102419	258.3 to 259.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
102457	262.3 to 264.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
102478	264.3 to 294.9 feet	Key Note Segment		5 ft	153			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181712	IVY GLEN DR	RUBICON AVE	BENT OAK TR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102420	275.6 to 276.6 feet	Vertical Change	.34"	5 ft	5	REF		
102421	284.7 to 285.7 feet	Vertical Change	-.38"	5 ft	5	REF		
102458	297.3 to 298.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
102479	298.5 to 326.6 feet	Key Note Segment		5 ft	141			
102422	327.2 to 328.2 feet	Vertical Change	.26"	5 ft	5	REF		
102459	328.1 to 330.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
102460	335.2 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
102461	351.5 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
102423	366.6 to 367.6 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
102480	373.0 to 401.3 feet	Key Note Segment		5 ft	142			
102424	393.0 to 394.0 feet	Vertical Change	-.36"	5 ft	5	REF		
102462	403.0 to 404.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102481	407.2 to 435.4 feet	Key Note Segment		5 ft	141			
102463	437.8 to 441.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
102425	449.3 to 450.3 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
102426	455.8 to 456.8 feet	Vertical Change	1.18"	5 ft	5	SF	$75	**$375**
102427	458.9 to 459.9 feet	Vertical Change	-.26"	5 ft	5	REF		
102464	459.1 to 462.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
102428	464.7 to 465.7 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
102465	472.1 to 473.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102466	476.9 to 478.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
102482	479.3 to 509.4 feet	Key Note Segment		5 ft	151			
102429	493.3 to 494.3 feet	Vertical Change	.41"	5 ft	5	REF		
102430	499.8 to 500.8 feet	Vertical Change	-.35"	5 ft	5	REF		
102467	509.5 to 511.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
102483	512.0 to 535.1 feet	Key Note Segment		5 ft	116			
102468	535.4 to 584.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	244	SF	$40	**$9,780**
102431	541.8 to 542.8 feet	Vertical Change	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181712	IVY GLEN DR	RUBICON AVE	BENT OAK TR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102484	584.8 to 605.3 feet	Key Note Segment		5 ft	103			
102469	607.1 to 610.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
102485	610.9 to 630.1 feet	Key Note Segment		5 ft	96			
102432	620.6 to 621.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
102470	631.9 to 633.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
102471	642.4 to 651.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
102486	651.3 to 680.6 feet	Key Note Segment		5 ft	147			
102472	687.2 to 704.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
102433	706.7 to 707.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
102487	707.8 to 736.1 feet	Key Note Segment		5 ft	142			
102434	717.7 to 718.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
102435	755.2 to 756.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
102473	763.8 to 766.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102436	772.0 to 773.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
102474	773.1 to 774.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102488	775.4 to 799.0 feet	Key Note Segment		5 ft	118			
102475	799.5 to 800.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102489	802.3 to 826.1 feet	Key Note Segment		5 ft	119			
102476	826.9 to 832.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
102477	832.3 to 839.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
102437	838.7 to 839.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
102438	846.6 to 847.6 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
102490	853.1 to 883.9 feet	Key Note Segment		5 ft	154			

TOTAL COST FOR: S *side of* **IVY GLEN DR** *Starting at:* **RUBICON AVE** **$130,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141002	JACKSON CT	JEFFERSON AVE	JEFFERSON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100414	0.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
100415	6.2 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
100416	12.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100417	18.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
100449	27.7 to 41.7 feet	Key Note Segment		5 ft	70			
100394	35.4 to 36.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
100418	44.1 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
100395	44.8 to 45.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
100450	59.6 to 74.3 feet	Key Note Segment		5 ft	74			
100396	67.6 to 68.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
100419	74.6 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100420	81.8 to 89.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
100421	90.2 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
100422	101.4 to 114.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
100423	115.0 to 116.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
100451	116.2 to 132.0 feet	Key Note Segment		5 ft	79			
100397	126.1 to 127.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
100424	132.0 to 133.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
100425	135.7 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100426	139.8 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
100427	152.8 to 170.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
100428	174.8 to 175.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100452	179.3 to 195.5 feet	Key Note Segment		5 ft	81			
100399	188.5 to 189.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
100429	195.5 to 199.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
100400	216.4 to 217.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
100430	220.9 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
100431	226.1 to 232.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141002	JACKSON CT	JEFFERSON AVE	JEFFERSON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100432	232.3 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100401	233.4 to 234.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
100433	236.4 to 237.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100402	249.7 to 250.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
100453	250.8 to 266.2 feet	Key Note Segment		5 ft	77			
100403	259.8 to 260.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
100434	269.7 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
100435	290.4 to 295.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
100404	301.6 to 302.6 feet	**Vertical Change**	-.8"	5 ft	5	SF	$75	**$375**
100405	303.7 to 304.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
100436	303.9 to 307.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
100406	310.6 to 311.6 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
100454	321.8 to 337.2 feet	Key Note Segment		5 ft	77			
100407	330.9 to 331.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
100408	341.9 to 342.9 feet	**Vertical Change**	1.53"	5 ft	5	SF	$75	**$375**
100437	343.7 to 349.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
100438	353.3 to 360.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
100439	360.0 to 372.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
100440	376.9 to 386.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
100455	386.1 to 399.5 feet	Key Note Segment		5 ft	67			
100409	394.4 to 395.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
100441	401.7 to 404.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
100410	402.9 to 403.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
100442	413.2 to 414.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100411	415.7 to 416.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
100412	429.3 to 430.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
100413	442.1 to 443.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
100443	442.8 to 444.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201141002	JACKSON CT	JEFFERSON AVE	JEFFERSON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100456	444.3 to 457.4 feet	Key Note Segment		5 ft	66			
100444	457.4 to 476.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	95	SF	$40	$3,780
100457	476.3 to 489.6 feet	Key Note Segment		5 ft	67			
100445	490.1 to 491.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	9	SF	$40	$340
100446	493.4 to 501.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
100447	504.6 to 514.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
100448	519.8 to 522.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620

TOTAL COST FOR: E/N/W *side of* **JACKSON CT** *Starting at:* **JEFFERSON AVE** **$117,145.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071620	JADEN CT	1651 JADEN CT	SALVADOR WY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125206	0.3 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
125218	2.8 to 21.8 feet	Key Note Segment		5 ft	95			
125200	20.6 to 21.6 feet	**Vertical Change**	1.09"	5 ft	5	REF		
125219	28.3 to 49.3 feet	Key Note Segment		5 ft	105			
125207	49.6 to 62.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
125208	75.7 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
125209	82.8 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
125210	90.1 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
125211	96.9 to 101.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
125201	97.9 to 98.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
125212	101.8 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
125220	104.9 to 124.3 feet	Key Note Segment		5 ft	97			
125202	118.2 to 119.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
125223	124.3 to 125.5 feet		5.0-6.0%	5 ft	6			
125203	124.9 to 125.9 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
125213	126.2 to 127.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
125214	128.2 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
125204	132.7 to 133.7 feet	**Vertical Change**	2.06"	5 ft	5	REF		
125221	156.9 to 175.4 feet	Key Note Segment		5 ft	93			
125215	178.8 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
125222	183.0 to 202.1 feet	Key Note Segment		5 ft	96			
125216	208.5 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
125205	209.7 to 210.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
125217	229.5 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: N *side of* **JADEN CT** *Starting at:* **1651 JADEN CT** **$54,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071617	JADEN CT	SALVADOR WY	1651 JADEN CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125183	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
125184	2.7 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
125175	16.6 to 17.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
125195	25.9 to 45.2 feet	Key Note Segment		5 ft	97			
125185	48.8 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
125196	51.2 to 70.5 feet	Key Note Segment		5 ft	97			
125176	71.2 to 72.2 feet	**Vertical Change**	-.68"	5 ft	5	SF	$75	**$375**
125186	72.5 to 90.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
125187	91.3 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
125197	103.2 to 122.2 feet	Key Note Segment		5 ft	95			
125177	122.9 to 123.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
125188	125.4 to 129.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,580**
125189	129.7 to 139.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
125178	136.9 to 137.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
125190	140.2 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
125191	169.6 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
125198	179.5 to 198.3 feet	Key Note Segment		5 ft	94			
125192	200.1 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
125193	206.0 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
125199	208.0 to 227.1 feet	Key Note Segment		5 ft	96			
125179	214.8 to 215.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
125180	221.1 to 222.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
125181	227.5 to 228.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
125194	228.3 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125182	229.5 to 230.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **JADEN CT** *Starting at:* **SALVADOR WY** **$61,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011616	JAMES WAY	609 JAMES WAY	N D ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117193	32.0 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
117173	33.5 to 34.5 feet	**Vertical Change**	.43"	4 ft	4	REF		
117194	35.8 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,160**
117174	46.6 to 47.6 feet	**Vertical Change**	-.3"	4 ft	4	REF		
117195	47.3 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
117231	54.3 to 72.8 feet	Key Note Segment		4 ft	74			
117232	78.8 to 96.5 feet	Key Note Segment		4 ft	71			
117196	98.9 to 107.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,080**
117175	99.2 to 100.2 feet	**Vertical Change**	-.36"	4 ft	4	REF		
117176	101.7 to 102.7 feet	**Vertical Change**	.35"	4 ft	4	REF		
117197	107.4 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,904**
117198	125.3 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
117199	131.7 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
117200	142.8 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
117201	151.3 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
117177	152.9 to 153.9 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
117202	154.9 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
117233	158.8 to 177.6 feet	Key Note Segment		4 ft	75			
117179	179.3 to 180.3 feet	**Vertical Change**	2.68"	4 ft	4	REF		
117203	180.3 to 181.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
117234	185.7 to 202.2 feet	Key Note Segment		4 ft	66			
117204	213.3 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
117180	215.5 to 216.5 feet	**Vertical Change**	-.34"	4 ft	4	REF		
117181	219.2 to 220.2 feet	**Vertical Change**	.27"	4 ft	4	REF		
117205	219.6 to 231.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	48	SF	$120	**$5,760**
117182	233.3 to 234.3 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**
117206	236.2 to 238.4 feet	Cross Slope (PAR)	12.0-13.0%	4 ft	9	SF	$120	**$1,056**
117183	238.1 to 239.1 feet	**Vertical Change**	.71"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011616	JAMES WAY	609 JAMES WAY	N D ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117207	247.5 to 250.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**
117208	250.8 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
117209	260.7 to 266.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,592**
117235	266.1 to 281.8 feet	Key Note Segment		4 ft	63			
117184	266.3 to 267.3 feet	**Vertical Change**	.69"	4 ft	4	REF		
117210	287.0 to 290.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
117236	290.2 to 304.4 feet	Key Note Segment		4 ft	57			
117211	306.9 to 308.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
117212	309.7 to 331.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,512**
117213	334.3 to 341.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
117237	341.7 to 357.8 feet	Key Note Segment		4 ft	64			
117214	359.1 to 360.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117215	363.3 to 364.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117216	364.5 to 367.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
117217	367.5 to 374.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	28	SF	$120	**$3,312**
117218	376.7 to 388.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,568**
117186	377.3 to 378.3 feet	**Vertical Change**	.31"	4 ft	4	REF		
117219	389.5 to 404.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	61	SF	$120	**$7,296**
117187	401.9 to 402.9 feet	**Vertical Change**	-.28"	4 ft	4	REF		
117220	405.3 to 409.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,160**
117221	409.8 to 421.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	47	SF	$120	**$5,616**
117188	413.7 to 414.7 feet	**Vertical Change**	.48"	4 ft	4	REF		
117189	421.1 to 422.1 feet	**Vertical Change**	-.37"	4 ft	4	REF		
117238	422.8 to 439.6 feet	Key Note Segment		4 ft	67			
117239	446.4 to 463.2 feet	Key Note Segment		4 ft	67			
117190	462.9 to 463.9 feet	**Vertical Change**	-.42"	4 ft	4	REF		
117222	466.6 to 474.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,888**
117223	475.8 to 477.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011616	JAMES WAY	609 JAMES WAY	N D ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117191	476.5 to 477.5 feet	Vertical Change	-.27"	4 ft	4	REF		
117224	482.4 to 484.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
117225	488.8 to 490.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
117226	490.7 to 497.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,168**
117227	507.9 to 511.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
117192	516.9 to 517.9 feet	Vertical Change	-.27"	4 ft	4	LF	$75	**$300**
117228	521.5 to 527.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
117240	528.4 to 546.1 feet	Key Note Segment		4 ft	71			
117229	547.5 to 549.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	9	SF	$120	**$1,104**
117241	550.9 to 568.7 feet	Key Note Segment		4 ft	71			
117230	601.0 to 602.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **609 JAMES WAY** **$98,628.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011612	JAMES WAY	613 JAMES WAY	609 JAMES WAY	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117166	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
117163	2.9 to 3.9 feet	**Vertical Change**	-.33"	4 ft	4	REF		
117167	10.7 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
117164	25.3 to 26.3 feet	**Vertical Change**	1.04"	4 ft	4	REF		
117168	25.9 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
117169	32.9 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
117171	36.5 to 52.4 feet	Key Note Segment		4 ft	64			
117165	36.7 to 37.7 feet	**Vertical Change**	1.2"	4 ft	4	REF		
117170	55.1 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
117172	60.2 to 77.2 feet	Key Note Segment		4 ft	68			

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **613 JAMES WAY** **$10,368.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021333	JAMES WAY	701 JAMES WAY	AUSTIN AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118367	0.6 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
118368	3.2 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
118371	10.3 to 23.5 feet	Key Note Segment		4 ft	53			
118366	11.2 to 12.2 feet	**Vertical Change**	.67"	4 ft	4	REF		
118369	24.3 to 36.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	50	SF	$40	**$1,984**
118370	41.1 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	44	SF	$120	**$5,328**

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **701 JAMES WAY** **$11,152.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021332	JAMES WAY	809 JAMES WAY	705 JAMES WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118331	22.2 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	59	SF	$120	**$7,056**
118358	36.9 to 48.9 feet	Key Note Segment		4 ft	48			
118332	48.9 to 52.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	13	SF	$40	**$528**
118333	52.9 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
118334	61.0 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,016**
118335	80.7 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,512**
118359	90.2 to 102.5 feet	Key Note Segment		4 ft	49			
118336	103.3 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
118337	104.4 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
118338	113.1 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,928**
118360	145.8 to 157.0 feet	Key Note Segment		4 ft	45			
118322	146.6 to 147.6 feet	**Vertical Change**	-.32"	4 ft	4	REF		
118339	158.8 to 161.3 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	10	SF	$120	**$1,200**
118340	162.9 to 199.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	146	SF	$120	**$17,472**
118323	188.4 to 189.4 feet	**Vertical Change**	-.28"	4 ft	4	REF		
118361	200.5 to 213.6 feet	Key Note Segment		4 ft	52			
118324	201.5 to 202.5 feet	**Vertical Change**	.77"	4 ft	4	REF		
118341	213.6 to 236.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	91	SF	$40	**$3,632**
118325	234.9 to 235.9 feet	**Vertical Change**	.36"	4 ft	4	REF		
118342	239.0 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
118362	252.4 to 264.9 feet	Key Note Segment		4 ft	50			
118343	267.1 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
118344	271.6 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
118345	281.0 to 298.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	71	SF	$120	**$8,544**
118326	288.6 to 289.6 feet	**Vertical Change**	.35"	4 ft	4	REF		
118363	299.9 to 315.0 feet	Key Note Segment		4 ft	60			
118327	300.6 to 301.6 feet	**Vertical Change**	.33"	4 ft	4	REF		
118346	315.0 to 317.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	8	SF	$40	**$320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021332	JAMES WAY	809 JAMES WAY	705 JAMES WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118347	318.8 to 331.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,144**
118348	334.8 to 337.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,152**
118349	338.5 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
118350	342.2 to 357.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,536**
118364	358.4 to 370.4 feet	Key Note Segment		4 ft	48			
118328	380.8 to 381.8 feet	**Vertical Change**	1.31"	4 ft	4	SF	$75	**$300**
118351	392.5 to 395.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
118352	400.5 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
118365	411.1 to 425.5 feet	Key Note Segment		4 ft	58			
118353	430.0 to 436.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
118329	433.6 to 434.6 feet	**Vertical Change**	.37"	4 ft	4	REF		
118354	437.1 to 439.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$1,008**
118355	441.3 to 446.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
118356	446.8 to 449.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
118330	449.7 to 450.7 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
118357	458.4 to 461.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **809 JAMES WAY** **$102,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011611	JAMES WAY	AUSTIN AVE	617 JAMES WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117154	0.5 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,728**
117155	6.7 to 10.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
117156	16.2 to 19.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**
117157	23.8 to 30.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	28	SF	$120	**$3,312**
117161	31.3 to 50.7 feet	Key Note Segment		4 ft	78			
117158	53.0 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
117159	54.0 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
117162	57.3 to 75.2 feet	Key Note Segment		4 ft	72			
117160	82.9 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,672**
117153	85.9 to 86.9 feet	**Vertical Change**	.33"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **AUSTIN AVE** **$16,032.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021341	JAMES WAY	AUSTIN AVE	N LAKE ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118393	0.3 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	84	SF	$120	**$10,080**
118372	18.6 to 19.6 feet	**Vertical Change**	.32"	4 ft	4	REF		
118394	22.2 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
118373	23.1 to 24.1 feet	**Vertical Change**	-.43"	4 ft	4	REF		
118442	28.8 to 41.9 feet	Key Note Segment		4 ft	52			
118374	42.7 to 43.7 feet	**Vertical Change**	.27"	4 ft	4	REF		
118395	43.1 to 53.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	41	SF	$120	**$4,944**
118443	54.5 to 66.8 feet	Key Note Segment		4 ft	49			
118375	67.4 to 68.4 feet	**Vertical Change**	.27"	4 ft	4	REF		
118396	68.3 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
118397	82.2 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	94	SF	$120	**$11,232**
118444	106.1 to 118.1 feet	Key Note Segment		4 ft	48			
118398	118.1 to 119.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	6	SF	$40	**$224**
118399	119.5 to 120.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
118376	139.8 to 140.8 feet	**Vertical Change**	-.41"	4 ft	4	LF	$75	**$300**
118400	143.7 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
118401	151.5 to 153.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$816**
118402	155.8 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**
118445	159.8 to 173.1 feet	Key Note Segment		4 ft	53			
118377	160.5 to 161.5 feet	**Vertical Change**	.26"	4 ft	4	REF		
118378	183.6 to 184.6 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
118403	196.0 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118404	202.4 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
118405	207.9 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
118446	210.5 to 224.0 feet	Key Note Segment		4 ft	54			
118379	211.5 to 212.5 feet	**Vertical Change**	-.39"	4 ft	4	REF		
118406	224.2 to 226.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	10	SF	$40	**$416**
118407	229.3 to 232.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,392**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021341	JAMES WAY	AUSTIN AVE	N LAKE ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118408	232.2 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
118447	262.8 to 275.8 feet	Key Note Segment		4 ft	52			
118409	275.8 to 301.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	102	SF	$40	**$4,064**
118410	301.8 to 310.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
118411	310.6 to 312.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$768**
118448	312.2 to 325.5 feet	Key Note Segment		4 ft	53			
118412	325.5 to 328.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	11	SF	$40	**$432**
118413	331.1 to 346.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,584**
118414	346.9 to 355.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,128**
118415	355.5 to 357.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
118380	359.0 to 360.0 feet	**Vertical Change**	1.23"	4 ft	4	SF	$75	**$300**
118381	361.0 to 362.0 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**
118416	362.5 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
118449	365.3 to 377.4 feet	Key Note Segment		4 ft	48			
118417	377.4 to 379.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	6	SF	$40	**$256**
118418	381.0 to 383.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
118419	389.1 to 399.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
118420	399.5 to 410.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	46	SF	$120	**$5,472**
118421	410.9 to 412.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
118450	418.3 to 431.2 feet	Key Note Segment		4 ft	52			
118422	431.3 to 433.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$336**
118382	449.0 to 450.0 feet	**Vertical Change**	-.65"	4 ft	4	SF	$75	**$300**
118423	464.2 to 467.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
118451	467.3 to 480.4 feet	Key Note Segment		4 ft	52			
118383	480.9 to 481.9 feet	**Vertical Change**	-.29"	4 ft	4	REF		
118424	481.3 to 483.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
118384	489.8 to 490.8 feet	**Vertical Change**	.97"	4 ft	4	SF	$75	**$300**
118425	494.2 to 496.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021341	JAMES WAY	AUSTIN AVE	N LAKE ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118385	494.4 to 495.4 feet	Vertical Change	.74"	4 ft	4	REF		
118386	511.8 to 512.8 feet	Vertical Change	-.35"	4 ft	4	LF	$75	$300
118426	514.7 to 519.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,400
118452	521.8 to 535.4 feet	Key Note Segment		4 ft	54			
118427	536.6 to 549.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	51	SF	$120	$6,096
118428	549.7 to 556.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	$3,312
118387	551.5 to 552.5 feet	Vertical Change	-.62"	4 ft	4	REF		
118429	558.7 to 570.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	$5,520
118453	570.2 to 582.7 feet	Key Note Segment		4 ft	50			
118430	583.2 to 585.0 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	7	SF	$40	$288
118431	589.2 to 594.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,352
118432	597.3 to 599.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
118388	605.2 to 606.2 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
118433	616.7 to 622.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	$2,544
118454	622.6 to 638.8 feet	Key Note Segment		4 ft	65			
118434	640.6 to 644.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	$1,680
118435	645.8 to 647.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	$816
118436	650.4 to 677.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	$13,152
118437	680.8 to 686.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,640
118389	683.0 to 684.0 feet	Vertical Change	3.4"	4 ft	4	REF		
118390	686.0 to 687.0 feet	Vertical Change	2.07"	4 ft	4	REF		
118455	686.3 to 699.2 feet	Key Note Segment		4 ft	52			
118438	707.2 to 711.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	$2,256
118439	727.7 to 734.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	$3,168
118440	743.3 to 744.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$768
118456	747.2 to 759.5 feet	Key Note Segment		4 ft	49			
118391	780.6 to 781.6 feet	Vertical Change	.33"	4 ft	4	LF	$75	$300
118441	787.8 to 794.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	$2,976

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021341	JAMES WAY	AUSTIN AVE	N LAKE ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118392	793.8 to 794.8 feet	Vertical Change	.36"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **JAMES WAY** *Starting at:* **AUSTIN AVE** **$141,052.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011618	JAMES WAY	N D ST	400 JAMES WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117244	0.7 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	138	SF	$120	**$16,512**
117245	37.6 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	106	SF	$120	**$12,672**
117242	56.5 to 57.5 feet	**Vertical Change**	.28"	4 ft	4	REF		
117246	64.4 to 71.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	**$3,456**
117247	72.5 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
117249	76.1 to 94.4 feet	Key Note Segment		4 ft	73			
117243	76.8 to 77.8 feet	**Vertical Change**	.41"	4 ft	4	REF		
117248	97.2 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,456**

TOTAL COST FOR: S *side of* **JAMES WAY** *Starting at:* **N D ST** **$37,776.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021328	JAMES WAY	N LAKE ST	813 JAMES WAY	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118299	0.0 to 3.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**
118290	0.9 to 1.9 feet	**Vertical Change**	-.28"	4 ft	4	REF		
118300	3.9 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
118291	9.2 to 10.2 feet	**Vertical Change**	.4"	4 ft	4	LF	$75	**$300**
118301	22.8 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
118317	24.8 to 37.5 feet	Key Note Segment		4 ft	51			
118292	25.8 to 26.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
118302	37.5 to 40.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	10	SF	$40	**$416**
118303	46.4 to 52.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
118293	52.1 to 53.1 feet	**Vertical Change**	.26"	4 ft	4	REF		
118304	67.1 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
118318	81.5 to 94.4 feet	Key Note Segment		4 ft	52			
118305	94.5 to 99.6 feet	**Cross Slope (Driveway)**	7.0-8.0%	4 ft	20	SF	$40	**$816**
118306	99.6 to 103.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	17	SF	$120	**$2,016**
118307	103.8 to 107.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,872**
118321	108.1 to 109.1 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
118308	109.8 to 114.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,400**
118294	113.1 to 114.1 feet	**Vertical Change**	-.34"	4 ft	4	REF		
118309	116.2 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
118310	124.6 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
118319	127.3 to 145.3 feet	Key Note Segment		4 ft	72			
118295	132.9 to 133.9 feet	**Vertical Change**	.48"	4 ft	4	REF		
118296	146.0 to 147.0 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
118311	154.9 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
118312	165.6 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
118313	182.5 to 188.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
118320	188.9 to 202.1 feet	Key Note Segment		4 ft	53			
118314	202.7 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021328	JAMES WAY	N LAKE ST	813 JAMES WAY	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118315	203.8 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
118297	207.7 to 208.7 feet	**Vertical Change**	3.35"	4 ft	4	SF	$75	**$300**
118316	219.6 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	99	SF	$120	**$11,856**
118298	224.1 to 225.1 feet	**Vertical Change**	.45"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **JAMES WAY** *Starting at:* **N LAKE ST** **$45,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141025	JEFFERSON AVE	1932 JEFFERSON AVE	ORCHARD AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100714	0.0 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
100693	11.5 to 12.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
100756	13.3 to 27.2 feet	Key Note Segment		5 ft	70			
100694	20.5 to 21.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
100715	27.2 to 28.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
100716	32.6 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
100717	48.1 to 55.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
100718	57.3 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100719	61.7 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
100720	68.6 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100721	73.1 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
100695	98.7 to 99.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
100757	101.8 to 113.9 feet	Key Note Segment		5 ft	61			
100696	108.7 to 109.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
100722	114.8 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
100723	125.7 to 130.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,700**
100697	130.1 to 131.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
100724	130.9 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100758	132.0 to 145.3 feet	Key Note Segment		5 ft	67			
100725	147.2 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
100726	153.3 to 157.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
100727	157.6 to 160.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,860**
100728	161.4 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
100729	176.3 to 179.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
100730	182.2 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
100699	206.7 to 207.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
100700	209.2 to 210.2 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
100731	211.6 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141025	JEFFERSON AVE	1932 JEFFERSON AVE	ORCHARD AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100701	212.2 to 213.2 feet	Vertical Change	.39"	5 ft	5	REF		
100702	217.3 to 218.3 feet	Vertical Change	2.18"	5 ft	5	SF	$75	$375
100759	218.7 to 232.8 feet	Key Note Segment		5 ft	71			
100732	232.8 to 238.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	29	SF	$40	$1,140
100733	240.8 to 244.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
100734	244.3 to 246.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,020
100735	248.3 to 250.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
100760	250.8 to 264.9 feet	Key Note Segment		5 ft	70			
100736	266.8 to 272.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,660
100703	268.4 to 269.4 feet	Vertical Change	-.32"	5 ft	5	REF		
100737	275.5 to 295.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	$12,180
100738	298.0 to 313.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,300
100739	318.0 to 336.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,220
100704	336.3 to 337.3 feet	Vertical Change	.28"	5 ft	5	REF		
100740	336.7 to 337.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
100761	338.2 to 351.9 feet	Key Note Segment		5 ft	69			
100741	352.7 to 356.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
100705	355.6 to 356.6 feet	Vertical Change	.28"	5 ft	5	REF		
100742	359.2 to 368.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,280
100762	368.0 to 382.6 feet	Key Note Segment		5 ft	73			
100743	384.3 to 385.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
100706	386.3 to 387.3 feet	Vertical Change	.82"	5 ft	5	SF	$75	$375
100744	400.0 to 406.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
100745	412.8 to 416.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460
100707	416.3 to 417.3 feet	Vertical Change	.31"	5 ft	5	REF		
100746	420.8 to 422.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
100708	421.9 to 422.9 feet	Vertical Change	.32"	5 ft	5	REF		
100747	426.8 to 428.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141025	JEFFERSON AVE	1932 JEFFERSON AVE	ORCHARD AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100748	433.6 to 439.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
100709	443.1 to 444.1 feet	**Vertical Change**	.62"	5 ft	5	REF		
100749	443.5 to 445.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
100750	454.5 to 457.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
100763	457.9 to 472.0 feet	Key Note Segment		5 ft	71			
100751	472.0 to 484.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	64	SF	$40	**$2,540**
100710	475.2 to 476.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
100752	484.7 to 486.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
100711	486.0 to 487.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
100764	487.7 to 501.8 feet	Key Note Segment		5 ft	71			
100753	502.8 to 504.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100712	505.4 to 506.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
100754	506.5 to 507.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100755	511.2 to 535.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,520**
100713	535.4 to 536.4 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JEFFERSON AVE** *Starting at:* **1932 JEFFERSON AVE** **$157,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141019	JEFFERSON AVE	ARTHUR CT	N SCHNOOR AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100664	2.2 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
100665	17.8 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
100666	27.9 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
100667	37.7 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,460**
100668	52.3 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
100669	65.3 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **ARTHUR CT** **$26,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131450	JEFFERSON AVE	BAYLOR CT	CENTRAL PL	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98649	23.0 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
98650	31.3 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
98651	51.3 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
98652	66.4 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
98653	77.0 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
98654	87.5 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
98615	88.9 to 89.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
98655	94.9 to 97.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
98656	98.7 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98616	101.2 to 102.2 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
98657	104.3 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
98617	110.1 to 111.1 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
98618	113.0 to 114.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
98619	114.7 to 115.7 feet	**Vertical Change**	3.31"	5 ft	5	SF	$75	**$375**
98658	116.0 to 117.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
98659	119.4 to 124.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
98621	123.1 to 124.1 feet	**Vertical Change**	2.67"	5 ft	5	REF		
98622	125.0 to 126.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
98623	127.2 to 128.2 feet	**Vertical Change**	3.48"	5 ft	5	SF	$75	**$375**
98660	128.6 to 129.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
98624	129.4 to 130.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
98625	131.3 to 132.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
98661	131.3 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
98626	133.3 to 136.8 feet	**Vertical Change**	-.3"	5 ft	18	LF	$75	**$1,313**
98662	134.8 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
98627	137.6 to 138.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
98628	139.5 to 140.5 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
98663	144.9 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131450	JEFFERSON AVE	BAYLOR CT	CENTRAL PL	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98629	146.2 to 149.3 feet	Vertical Change	.34"	5 ft	16	LF	$75	$1,163
98664	148.7 to 151.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
98630	150.3 to 151.3 feet	Vertical Change	3.53"	5 ft	5	REF		
98631	152.9 to 156.0 feet	Vertical Change	-.3"	5 ft	16	LF	$75	$1,163
98665	158.4 to 163.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
98632	162.5 to 163.5 feet	Vertical Change	.47"	5 ft	5	REF		
98633	167.5 to 168.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
98666	169.0 to 170.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
98634	169.5 to 172.9 feet	Vertical Change	.31"	5 ft	17	REF		
98667	170.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
98635	175.0 to 176.0 feet	Vertical Change	-.31"	5 ft	5	REF		
98636	176.8 to 177.8 feet	Vertical Change	.38"	5 ft	5	REF		
98637	180.4 to 181.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
98638	182.8 to 185.9 feet	Vertical Change	-.27"	5 ft	16	LF	$75	$1,163
98668	184.9 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
98669	195.3 to 207.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
98670	207.8 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
98639	210.3 to 211.3 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
98671	215.4 to 217.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
98640	223.2 to 224.2 feet	Vertical Change	.75"	5 ft	5	REF		
98672	223.8 to 225.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
98673	225.8 to 227.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
98641	228.6 to 229.6 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
98642	242.4 to 243.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
98643	244.2 to 245.2 feet	Vertical Change	3.09"	5 ft	5	SF	$75	$375
98644	246.4 to 247.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
98645	254.6 to 255.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
98646	258.0 to 259.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131450	JEFFERSON AVE	BAYLOR CT	CENTRAL PL	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98674	259.1 to 262.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
98675	259.5 to 261.3 feet		5.0-6.0%	5 ft	9			
98647	260.0 to 261.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
98648	262.1 to 263.1 feet	**Vertical Change**	.44"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **BAYLOR CT** **$74,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131455	JEFFERSON AVE	CENTRAL PL	ORCHARD AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98676	18.9 to 19.9 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
98695	20.4 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
98722	27.3 to 40.8 feet	Key Note Segment		5 ft	67			
98696	40.8 to 43.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	11	SF	$40	$440
98697	45.6 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,820
98698	50.8 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
98723	53.2 to 66.6 feet	Key Note Segment		5 ft	67			
98678	63.0 to 66.1 feet	Vertical Change	.45"	5 ft	15	REF		
98679	66.9 to 67.9 feet	Vertical Change	-.59"	5 ft	5	REF		
98699	67.1 to 71.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	$940
98680	68.6 to 85.4 feet	Vertical Change	.38"	5 ft	84	REF		
98681	86.2 to 89.0 feet	Vertical Change	-.35"	5 ft	14	LF	$75	$1,050
98682	89.7 to 90.7 feet	Vertical Change	.65"	5 ft	5	SF	$75	$375
98683	91.8 to 92.8 feet	Vertical Change	-.94"	5 ft	5	REF		
98700	92.4 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
98684	93.7 to 94.7 feet	Vertical Change	.75"	5 ft	5	REF		
98685	95.8 to 96.8 feet	Vertical Change	.46"	5 ft	5	REF		
98686	97.5 to 98.5 feet	Vertical Change	1.18"	5 ft	5	SF	$75	$375
98701	106.8 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
98702	116.3 to 117.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
98703	121.3 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
98724	129.9 to 143.9 feet	Key Note Segment		5 ft	70			
98687	132.4 to 133.4 feet	Vertical Change	2.82"	5 ft	5	REF		
98704	145.4 to 147.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
98705	147.6 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
98706	152.6 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
98725	155.1 to 170.1 feet	Key Note Segment		5 ft	75			
98688	170.0 to 171.0 feet	Vertical Change	1.06"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131455	JEFFERSON AVE	CENTRAL PL	ORCHARD AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98707	170.1 to 172.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
98689	173.6 to 174.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
98708	178.3 to 181.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
98709	202.3 to 207.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
98710	211.3 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
98690	217.3 to 218.3 feet	Vertical Change	1.62"	5 ft	5	SF	$75	$375
98711	219.9 to 225.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
98712	227.4 to 232.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
98691	234.4 to 235.4 feet	Vertical Change	-1.77"	5 ft	5	SF	$75	$375
98726	236.4 to 250.1 feet	Key Note Segment		5 ft	69			
98713	258.5 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
98727	261.8 to 275.1 feet	Key Note Segment		5 ft	67			
98714	276.4 to 277.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
98715	282.9 to 287.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$2,940
98716	292.0 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
98717	299.6 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$1,020
98718	305.2 to 307.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
98728	313.6 to 327.3 feet	Key Note Segment		5 ft	68			
98692	331.0 to 332.0 feet	Vertical Change	1.68"	5 ft	5	SF	$75	$375
98719	335.7 to 337.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
98720	341.4 to 342.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
98693	343.6 to 344.6 feet	Vertical Change	-1.15"	5 ft	5	SF	$75	$375
98721	345.7 to 360.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,880
98694	354.5 to 355.5 feet	Vertical Change	-.29"	5 ft	5	REF		
98729	358.9 to 360.5 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **CENTRAL PL** **$61,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141013	JEFFERSON AVE	HARRISON CT	ARTHUR CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100571	0.5 to 2.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
100572	2.8 to 5.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
100563	5.0 to 6.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
100573	5.4 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
100574	8.4 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
100564	10.3 to 11.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
100565	15.0 to 16.0 feet	**Vertical Change**	-.57"	5 ft	5	REF		
100575	18.9 to 21.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
100576	22.7 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
100577	40.1 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
100566	40.9 to 41.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
100578	50.9 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
100579	53.8 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
100567	79.5 to 80.5 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
100580	81.4 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
100568	109.0 to 110.0 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
100581	111.3 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
100569	117.7 to 118.7 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
100582	121.0 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
100570	136.6 to 137.6 feet	**Vertical Change**	.95"	5 ft	5	SF	$75	**$375**
100583	149.3 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
100584	156.3 to 165.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,220**
100585	166.3 to 167.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
100586	167.2 to 168.2 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **HARRISON CT** **$48,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131443	JEFFERSON AVE	HARVARD AVE	BAYLOR CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98562	22.8 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
98563	34.2 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,660**
98564	50.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
98565	66.7 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
98558	75.4 to 76.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
98566	81.0 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
98567	83.5 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
98568	94.4 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
98569	100.8 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
98560	108.3 to 109.3 feet	**Vertical Change**	1.31"	5 ft	5	REF		
98570	129.3 to 140.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
98571	143.3 to 144.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
98572	145.7 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
98573	157.0 to 160.0 feet		6.0-7.0%	5 ft	15			
98574	157.0 to 160.0 feet	Running Slope	6.0-7.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **HARVARD AVE** **$62,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141004	JEFFERSON AVE	JACKSON CT	HARRISON CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100462	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
100463	5.8 to 10.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
100464	10.3 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
100458	22.2 to 23.2 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
100465	26.4 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
100466	37.9 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
100467	54.3 to 55.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
100468	58.4 to 59.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
100469	63.1 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,700**
100470	75.8 to 78.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
100471	80.9 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
100459	88.2 to 89.2 feet	**Vertical Change**	-.52"	5 ft	5	REF		
100472	93.5 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
100460	98.7 to 99.7 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
100461	100.5 to 101.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
100473	105.1 to 106.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
100474	107.1 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
100475	112.3 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
100476	131.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
100477	136.8 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
100478	141.7 to 147.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
100479	148.4 to 150.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
100480	154.3 to 167.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **JACKSON CT** **$59,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141021	JEFFERSON AVE	N SCHNOOR AVE	ARTHUR CT	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100679	6.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100670	12.8 to 13.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
100680	25.5 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100691	28.0 to 45.0 feet	Key Note Segment		5 ft	85			
100671	28.1 to 29.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
100681	46.3 to 47.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
100672	46.9 to 47.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
100692	59.4 to 76.1 feet	Key Note Segment		5 ft	83			
100673	69.5 to 70.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
100682	76.1 to 77.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
100674	77.4 to 78.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
100683	78.8 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
100675	82.7 to 83.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
100684	83.9 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
100676	86.9 to 87.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
100685	90.6 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
100686	108.0 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
100687	120.0 to 123.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
100677	120.2 to 121.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
100688	124.8 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
100689	129.1 to 141.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
100690	144.2 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
100678	146.5 to 147.5 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JEFFERSON AVE** *Starting at:* **N SCHNOOR AVE** **$24,745.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140959	JEFFERSON AVE	ORCHARD AVE	JACKSON CT	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100386	0.0 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
100387	6.3 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
100384	7.1 to 8.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
100388	11.4 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
100389	41.1 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
100390	54.4 to 56.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
100391	60.5 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
100392	64.4 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
100393	73.6 to 74.9 feet		5.0-6.0%	5 ft	7			
100385	75.3 to 76.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **JEFFERSON AVE** *Starting at:* **ORCHARD AVE** **$35,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131458	JEFFERSON AVE	ORCHARD AVE	WILLIAMS AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98735	0.8 to 5.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
98736	8.5 to 18.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
98737	20.7 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
98754	32.4 to 46.4 feet	Key Note Segment		5 ft	70			
98738	46.6 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
98755	57.8 to 71.8 feet	Key Note Segment		5 ft	70			
98739	72.7 to 74.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
98730	72.9 to 73.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
98740	75.1 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
98741	88.8 to 98.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
98742	98.5 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
98731	109.3 to 110.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
98743	116.2 to 117.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
98744	117.8 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
98732	126.2 to 127.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
98745	133.2 to 143.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
98756	144.1 to 158.8 feet	Key Note Segment		5 ft	74			
98733	145.2 to 146.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
98746	159.6 to 164.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98747	164.0 to 165.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
98748	168.6 to 169.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
98757	169.7 to 183.8 feet	Key Note Segment		5 ft	71			
98734	171.0 to 172.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
98749	184.5 to 189.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$980**
98750	189.4 to 192.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
98751	194.9 to 196.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
98752	200.9 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
98753	211.1 to 216.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131458	JEFFERSON AVE	ORCHARD AVE	WILLIAMS AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98758	215.9 to 217.3 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: S *side of* **JEFFERSON AVE** *Starting at:* **ORCHARD AVE** **$77,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131530	JEFFERSON AVE	WILLIAMS AVE	HARVARD AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99099	0.6 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
99149	11.9 to 24.8 feet	Key Note Segment		5 ft	65			
99100	24.8 to 31.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	32	SF	$40	**$1,280**
99101	31.2 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
99063	43.5 to 44.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
99102	47.9 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
99150	54.3 to 68.3 feet	Key Note Segment		5 ft	70			
99064	64.9 to 65.9 feet	**Vertical Change**	3.14"	5 ft	5	REF		
99103	68.8 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
99065	69.1 to 70.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
99104	72.3 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
99105	75.8 to 81.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
99066	81.5 to 82.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
99106	82.2 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
99107	91.8 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
99108	95.3 to 97.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
99067	98.8 to 99.8 feet	**Vertical Change**	-.69"	5 ft	5	SF	$75	**$375**
99068	108.1 to 109.1 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
99109	116.3 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
99069	119.9 to 120.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
99110	125.7 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
99151	131.8 to 146.3 feet	Key Note Segment		5 ft	73			
99111	148.0 to 149.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
99112	150.6 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
99070	151.6 to 152.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
99152	158.7 to 172.5 feet	Key Note Segment		5 ft	69			
99113	173.2 to 181.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
99114	183.7 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131530	JEFFERSON AVE	WILLIAMS AVE	HARVARD AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99115	192.5 to 196.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
99116	198.4 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
99117	207.3 to 212.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
99118	212.1 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
99119	227.8 to 235.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
99153	235.8 to 249.6 feet	Key Note Segment		5 ft	69			
99072	237.0 to 238.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
99120	250.0 to 254.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
99121	257.0 to 261.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
99154	262.1 to 274.9 feet	Key Note Segment		5 ft	64			
99122	275.8 to 277.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
99073	276.3 to 277.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
99123	277.5 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
99074	290.8 to 291.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
99075	294.9 to 295.9 feet	**Vertical Change**	-.63"	5 ft	5	REF		
99124	299.7 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99125	303.3 to 305.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
99076	304.8 to 305.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
99126	305.1 to 318.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
99127	325.4 to 339.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
99155	339.4 to 353.3 feet	Key Note Segment		5 ft	70			
99077	347.6 to 348.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
99128	354.2 to 365.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
99156	365.6 to 378.8 feet	Key Note Segment		5 ft	66			
99078	380.1 to 381.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
99079	393.9 to 394.9 feet	**Vertical Change**	1.3"	5 ft	5	SF	$75	**$375**
99129	395.8 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
99080	400.5 to 401.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131530	JEFFERSON AVE	WILLIAMS AVE	HARVARD AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99081	405.2 to 406.2 feet	Vertical Change	.29"	5 ft	5	REF		
99130	406.1 to 407.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
99131	411.2 to 415.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
99132	420.8 to 423.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
99133	423.8 to 427.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
99134	427.8 to 439.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
99135	443.8 to 449.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,300
99157	449.9 to 463.0 feet	Key Note Segment		5 ft	66			
99082	451.0 to 452.0 feet	Vertical Change	.44"	5 ft	5	REF		
99136	464.3 to 469.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
99137	469.4 to 475.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
99158	475.6 to 491.8 feet	Key Note Segment		5 ft	81			
99083	477.1 to 478.1 feet	Vertical Change	.31"	5 ft	5	REF		
99084	490.0 to 491.0 feet	Vertical Change	.44"	5 ft	5	REF		
99085	492.0 to 493.0 feet	Vertical Change	-.31"	5 ft	5	REF		
99138	492.8 to 510.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	$10,380
99086	505.7 to 506.7 feet	Vertical Change	.6"	5 ft	5	REF		
99139	512.1 to 516.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
99087	516.4 to 517.4 feet	Vertical Change	.29"	5 ft	5	REF		
99140	516.5 to 523.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,020
99088	520.9 to 521.9 feet	Vertical Change	-.3"	5 ft	5	REF		
99141	527.0 to 532.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
99089	533.3 to 534.3 feet	Vertical Change	.51"	5 ft	5	SF	$75	$375
99142	535.3 to 536.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600
99090	537.5 to 538.5 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
99161	546.4 to 547.4 feet		5.0-6.0%	5 ft	5			
99091	549.8 to 550.8 feet	Vertical Change	-.98"	5 ft	5	SF	$75	$375
99143	554.1 to 564.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131530	JEFFERSON AVE	WILLIAMS AVE	HARVARD AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99092	560.1 to 561.1 feet	Vertical Change	.3"	5 ft	5	REF		
99159	566.1 to 581.1 feet	Key Note Segment		5 ft	75			
99094	581.0 to 582.0 feet	Vertical Change	-.27"	5 ft	5	REF		
99144	581.6 to 583.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
99145	584.2 to 587.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
99146	590.0 to 591.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
99160	592.0 to 605.9 feet	Key Note Segment		5 ft	70			
99095	593.2 to 594.2 feet	Vertical Change	-.46"	5 ft	5	REF		
99096	614.9 to 615.9 feet	Vertical Change	.43"	5 ft	5	LF	$75	**$375**
99097	621.1 to 622.1 feet	Vertical Change	-.48"	5 ft	5	LF	$75	**$375**
99147	626.7 to 628.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
99148	631.3 to 638.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
99098	638.1 to 639.1 feet	Vertical Change	.47"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JEFFERSON AVE** *Starting at:* **WILLIAMS AVE** **$171,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241554	JENNINGS ST	1829 JENNINGS ST	1829 JENNINGS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107479	10.9 to 11.9 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
107480	14.5 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**

TOTAL COST FOR: N *side of* **JENNINGS ST** *Starting at:* **1829 JENNINGS ST** **$5,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071521	JERICHO DR	ADANAC WAY	SANARITA WY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124613	0.8 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
124614	3.9 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	274	SF	$120	**$32,820**
124608	46.5 to 47.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
124622	51.2 to 52.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124620	58.7 to 79.3 feet	Key Note Segment		5 ft	103			
124609	79.8 to 80.8 feet	**Vertical Change**	1.09"	5 ft	5	REF		
124615	79.8 to 81.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
124616	81.7 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
124621	87.3 to 108.8 feet	Key Note Segment		5 ft	108			
124610	88.3 to 89.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
124617	110.7 to 126.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
124618	128.3 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
124611	132.4 to 133.4 feet	**Vertical Change**	1.26"	5 ft	5	REF		
124619	149.6 to 170.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
124612	156.7 to 157.7 feet	**Vertical Change**	2.48"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **JERICHO DR** *Starting at:* **ADANAC WAY** **$72,339.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071345	JERICHO DR	ADANAC WAY	E KENNEDY ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123951	2.4 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
123942	6.2 to 7.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
123952	22.1 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
123960	28.8 to 50.3 feet	Key Note Segment		5 ft	108			
123943	50.7 to 51.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
123953	52.8 to 54.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
123944	56.3 to 57.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
123961	56.5 to 77.2 feet	Key Note Segment		5 ft	104			
123945	66.7 to 67.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
123946	77.3 to 78.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
123954	79.2 to 87.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
123947	92.4 to 93.4 feet	**Vertical Change**	3.49"	5 ft	5	SF	$75	**$375**
123955	96.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
123948	107.1 to 108.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
123962	116.2 to 137.1 feet	Key Note Segment		5 ft	105			
123949	116.8 to 117.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
123956	140.8 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
123957	148.9 to 161.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
123958	166.3 to 171.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
123950	169.0 to 170.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123959	171.7 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **JERICHO DR** *Starting at:* **ADANAC WAY** **$42,825.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071356	JERICHO DR	E KENNEDY ST	ADANAC WAY	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123968	0.0 to 16.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,140**
123969	16.9 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
123963	22.3 to 23.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
123964	27.8 to 28.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
123970	27.9 to 30.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
123965	34.3 to 35.3 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
123976	34.6 to 55.0 feet	Key Note Segment		5 ft	102			
123977	60.5 to 81.1 feet	Key Note Segment		5 ft	103			
123966	71.2 to 72.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
123971	81.1 to 82.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	9	SF	$40	**$360**
123967	81.7 to 82.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
123972	83.3 to 93.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
123973	93.9 to 117.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
123978	120.2 to 141.4 feet	Key Note Segment		5 ft	106			
123974	143.7 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
123975	160.5 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**

TOTAL COST FOR: E *side of* **JERICHO DR** *Starting at:* **E KENNEDY ST** **$47,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081049	JERICHO DR	JOSEPHINE CT	MICHOACAN CT	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125501	0.0 to 3.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
125502	4.4 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
125503	10.3 to 14.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
125504	15.1 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
125505	19.8 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,300**
125506	40.5 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,460**
125507	69.5 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
125499	100.7 to 101.7 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
125508	111.2 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	274	SF	$120	**$32,820**
125509	167.0 to 172.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
125500	170.2 to 171.2 feet	**Vertical Change**	2.43"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **JERICHO DR** *Starting at:* **JOSEPHINE CT** **$83,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081102	JERICHO DR	LACRETA AVE	MICHOACAN CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125606	0.1 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
125607	14.3 to 22.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
125608	22.7 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
125598	27.3 to 28.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
125609	28.0 to 38.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
125610	44.4 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
125599	46.3 to 47.3 feet	**Vertical Change**	2.31"	5 ft	5	REF		
125600	51.1 to 52.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
125601	63.3 to 64.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
125611	66.3 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	381	SF	$120	**$45,660**
125612	142.4 to 170.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	142	SF	$120	**$17,040**
125602	146.5 to 149.8 feet	**Vertical Change**	3.46"	5 ft	17	REF		
125603	153.4 to 156.7 feet	**Vertical Change**	2.03"	5 ft	16	REF		
125604	167.0 to 168.0 feet	**Vertical Change**	2.09"	5 ft	5	REF		
125605	169.1 to 170.1 feet	**Vertical Change**	3.49"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **JERICHO DR** *Starting at:* **LACRETA AVE** **$96,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071515	JERICHO DR	LACRETA AVE	SANARITA WY	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124571	0.0 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
124572	6.7 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	**$17,460**
124570	38.1 to 39.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
124573	38.4 to 69.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,480**
124574	71.3 to 88.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
124580	88.7 to 109.0 feet	Key Note Segment		5 ft	102			
124575	111.4 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
124576	115.8 to 120.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
124577	120.8 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
124578	134.8 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124579	139.4 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**

TOTAL COST FOR: W *side of* **JERICHO DR** *Starting at:* **LACRETA AVE** **$80,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081113	JERICHO DR	MICHOACAN CT	JOSEPHINE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125760	0.4 to 27.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**
125761	29.8 to 53.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
125762	53.3 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
125763	61.3 to 71.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
125757	62.5 to 63.5 feet	**Vertical Change**	1.44"	5 ft	5	REF		
125758	67.2 to 68.2 feet	**Vertical Change**	1.53"	5 ft	5	REF		
125764	74.5 to 85.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
125759	79.3 to 80.3 feet	**Vertical Change**	.56"	5 ft	5	REF		
125765	89.4 to 157.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	339	SF	$120	**$40,680**
125766	157.7 to 164.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
125767	164.8 to 171.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**

TOTAL COST FOR: E *side of* **JERICHO DR** *Starting at:* **MICHOACAN CT** **$96,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081100	JERICHO DR	MICHOACAN CT	LACRETA AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125591	0.0 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
125592	24.7 to 30.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
125593	30.5 to 47.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
125594	48.1 to 75.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	135	SF	$120	**$16,200**
125586	57.4 to 58.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
125595	77.9 to 80.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
125587	80.1 to 81.1 feet	**Vertical Change**	.56"	5 ft	5	REF		
125596	83.3 to 158.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	377	SF	$120	**$45,180**
125588	94.8 to 95.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
125589	107.2 to 108.2 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
125597	159.2 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
125590	171.6 to 172.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **JERICHO DR** *Starting at:* **MICHOACAN CT** **$94,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071524	JERICHO DR	SANARITA WY	LACRETA AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124624	0.0 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
124625	9.5 to 18.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
124626	19.6 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
124623	34.8 to 35.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
124627	40.4 to 46.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
124628	46.6 to 60.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
124634	60.9 to 80.2 feet	Key Note Segment		5 ft	97			
124629	84.7 to 86.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
124630	88.8 to 93.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
124631	94.1 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	257	SF	$120	**$30,780**
124632	148.0 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
124633	161.8 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: E *side of* **JERICHO DR** *Starting at:* **SANARITA WY** **$80,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071518	JERICHO DR	SANARITA WY	ADANAC WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124596	0.0 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
124581	9.2 to 10.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
124597	13.8 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
124598	15.4 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
124599	21.6 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	189	SF	$120	**$22,620**
124582	59.9 to 60.9 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
124606	60.2 to 80.3 feet	Key Note Segment		5 ft	101			
124583	75.0 to 76.0 feet	**Vertical Change**	2.57"	5 ft	5	REF		
124584	76.8 to 77.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
124585	79.3 to 80.3 feet	**Vertical Change**	1.29"	5 ft	5	REF		
124600	81.8 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
124601	84.5 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
124587	87.8 to 88.8 feet	**Vertical Change**	-.5"	5 ft	5	REF		
124607	90.5 to 109.9 feet	Key Note Segment		5 ft	97			
124588	98.0 to 99.0 feet	**Vertical Change**	1.07"	5 ft	5	REF		
124589	108.9 to 109.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
124590	110.6 to 111.6 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
124602	112.3 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
124591	120.1 to 121.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
124592	130.1 to 131.1 feet	**Vertical Change**	3.15"	5 ft	5	REF		
124603	143.1 to 145.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
124593	144.6 to 145.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
124604	147.4 to 148.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
124605	149.5 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
124594	150.0 to 151.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
124595	157.9 to 158.9 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **JERICHO DR** *Starting at:* **SANARITA WY** **$66,630.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071423	JESSE DR	ADANAC WAY	SANARITA WY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124168	0.8 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,080**
124169	9.5 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
124165	12.8 to 13.8 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
124170	16.5 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
124171	23.9 to 42.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	75	SF	$120	**$8,976**
124167	28.4 to 29.4 feet	**Vertical Change**	.28"	4 ft	4	REF		
124172	43.6 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
124173	50.4 to 56.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,880**
124174	56.9 to 59.5 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,248**
124175	59.5 to 68.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	34	SF	$120	**$4,080**
124176	68.0 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	63	SF	$120	**$7,584**
124177	84.0 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
124178	95.3 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
124181	121.6 to 139.1 feet	Key Note Segment		4 ft	70			
124179	151.6 to 157.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
124180	161.5 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,944**

TOTAL COST FOR: E *side of* **JESSE DR** *Starting at:* **ADANAC WAY** **$46,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071333	JESSE DR	ADANAC WAY	E KENNEDY ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123787	1.1 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	39	SF	$120	**$4,656**
123773	2.4 to 3.4 feet	**Vertical Change**	.5"	4 ft	4	REF		
123788	12.2 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
123774	20.4 to 21.4 feet	**Vertical Change**	2.58"	4 ft	4	REF		
123789	21.3 to 29.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	33	SF	$120	**$3,936**
123775	22.8 to 23.8 feet	**Vertical Change**	.45"	4 ft	4	REF		
123776	29.0 to 30.0 feet	**Vertical Change**	1.81"	4 ft	4	REF		
123798	29.5 to 48.6 feet	Key Note Segment		4 ft	76			
123777	34.5 to 35.5 feet	**Vertical Change**	.43"	4 ft	4	REF		
123778	36.4 to 37.4 feet	**Vertical Change**	1.51"	4 ft	4	REF		
123779	48.6 to 49.6 feet	**Vertical Change**	-.32"	4 ft	4	REF		
123780	50.6 to 51.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
123790	51.3 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	126	SF	$120	**$15,072**
123781	68.3 to 72.1 feet	**Vertical Change**	.34"	4 ft	15	REF		
123782	79.0 to 80.0 feet	**Vertical Change**	.34"	4 ft	4	REF		
123783	81.4 to 82.4 feet	**Vertical Change**	.9"	4 ft	4	REF		
123791	89.6 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
123784	91.0 to 92.0 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
123792	95.5 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
123785	97.5 to 98.5 feet	**Vertical Change**	2.44"	4 ft	4	REF		
123793	108.6 to 117.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,032**
123794	117.3 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
123799	118.8 to 137.9 feet	Key Note Segment		4 ft	76			
123786	133.3 to 134.3 feet	**Vertical Change**	2.13"	4 ft	4	REF		
123795	140.5 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,560**
123796	165.1 to 167.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
123797	167.8 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**

TOTAL COST FOR: W *side of* **JESSE DR** *Starting at:* **ADANAC WAY** **$52,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071335	JESSE DR	E KENNEDY ST	ADANAC WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123805	0.3 to 31.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	126	SF	$120	**$15,072**
123800	9.2 to 10.2 feet	**Vertical Change**	.28"	4 ft	4	REF		
123801	15.2 to 16.2 feet	**Vertical Change**	3.29"	4 ft	4	REF		
123806	34.3 to 36.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,248**
123807	36.9 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	**$6,576**
123802	52.0 to 53.0 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**
123808	61.2 to 65.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
123809	67.9 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
123812	72.4 to 83.2 feet	Key Note Segment		4 ft	43			
123803	83.0 to 84.0 feet	**Vertical Change**	.28"	4 ft	4	REF		
123810	115.1 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
123813	123.8 to 141.8 feet	Key Note Segment		4 ft	72			
123814	149.6 to 166.2 feet	Key Note Segment		4 ft	66			
123804	149.8 to 150.8 feet	**Vertical Change**	-.42"	4 ft	4	REF		
123811	168.1 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**

TOTAL COST FOR: E *side of* **JESSE DR** *Starting at:* **E KENNEDY ST** **$31,884.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071309	JESSE DR	LACRETA AVE	SANARITA WY	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123646	0.0 to 12.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	49	SF	$120	**$5,904**
123647	12.6 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
123648	16.6 to 31.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$7,008**
123649	31.2 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
123650	34.5 to 37.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,632**
123651	38.8 to 70.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	125	SF	$120	**$14,976**
123645	59.2 to 60.2 feet	**Vertical Change**	.35"	4 ft	4	REF		
123652	70.0 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	53	SF	$120	**$6,384**
123658	84.3 to 85.3 feet	**Continuous Width**	24"	4 ft	4	SF	$120	**$480**
123653	88.6 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	129	SF	$120	**$15,504**
123654	126.2 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
123655	141.9 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,328**
123656	158.2 to 170.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
123657	169.4 to 171.0 feet		5.0-6.0%	4 ft	6			

TOTAL COST FOR: W *side of* **JESSE DR** *Starting at:* **LACRETA AVE** **$71,136.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071455	JESSE DR	SANARITA WY	LACRETA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124420	0.1 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
124421	9.6 to 21.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	49	SF	$120	**$5,856**
124422	21.8 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
124423	27.9 to 35.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,456**
124415	33.2 to 34.2 feet	**Vertical Change**	.42"	4 ft	4	REF		
124424	58.6 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
124416	70.2 to 71.2 feet	**Vertical Change**	.56"	4 ft	4	SF	$75	**$300**
124425	72.5 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
124426	81.3 to 93.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	50	SF	$120	**$6,048**
124418	86.5 to 87.5 feet	**Vertical Change**	.3"	4 ft	4	REF		
124427	95.3 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,512**
124436	101.5 to 102.5 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
124419	102.3 to 103.3 feet	**Vertical Change**	-.26"	4 ft	4	REF		
124428	104.8 to 107.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,152**
124429	109.6 to 137.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	113	SF	$120	**$13,584**
124437	124.5 to 125.5 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
124430	139.3 to 140.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
124431	140.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
124432	146.4 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
124433	156.8 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,928**
124434	162.9 to 164.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
124435	166.9 to 171.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	19	SF	$120	**$2,304**

TOTAL COST FOR: E *side of* **JESSE DR** *Starting at:* **SANARITA WY** **$54,594.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071324	JESSE DR	SANARITA WY	ADANAC WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123707	0.0 to 1.7 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	7	SF	$120	**$816**
123708	2.5 to 28.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	103	SF	$120	**$12,336**
123709	28.2 to 29.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
123720	30.2 to 48.3 feet	Key Note Segment		4 ft	72			
123706	31.1 to 32.1 feet	**Vertical Change**	-.6"	4 ft	4	REF		
123710	51.4 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
123711	64.0 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	82	SF	$120	**$9,792**
123712	84.9 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
123713	93.3 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	44	SF	$120	**$5,280**
123714	106.4 to 119.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	53	SF	$120	**$6,336**
123715	120.5 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
123716	131.1 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	**$8,256**
123717	151.1 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
123718	158.0 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
123719	163.3 to 171.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	33	SF	$120	**$3,984**
123721	170.4 to 171.6 feet		5.0-6.0%	4 ft	5			

TOTAL COST FOR: W *side of* **JESSE DR** *Starting at:* **SANARITA WY** **$57,312.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140917	JONATHAN WAY	ARBELLA LN	STEPHANIE LN	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64325	0.0 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
64326	19.2 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
64327	23.0 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
64328	37.3 to 53.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
64313	44.5 to 45.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
64352	53.8 to 79.1 feet	Key Note Segment		5 ft	126			
64314	54.2 to 55.2 feet	**Vertical Change**	-.83"	5 ft	5	REF		
64315	64.9 to 65.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
64329	83.7 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
64353	86.3 to 110.2 feet	Key Note Segment		5 ft	120			
64330	111.8 to 148.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	185	SF	$120	**$22,200**
64331	150.5 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
64354	153.2 to 179.8 feet	Key Note Segment		5 ft	133			
64332	182.1 to 214.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,380**
64316	201.5 to 202.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
64333	214.8 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
64334	217.0 to 218.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
64355	218.4 to 237.3 feet	Key Note Segment		5 ft	95			
64335	241.5 to 248.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
64336	250.5 to 290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,700**
64317	276.2 to 277.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
64337	292.9 to 296.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
64338	298.7 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
64339	303.2 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
64318	306.7 to 307.7 feet	**Vertical Change**	.74"	5 ft	5	REF		
64340	316.4 to 318.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
64319	317.2 to 318.2 feet	**Vertical Change**	.85"	5 ft	5	REF		
64356	318.9 to 342.3 feet	Key Note Segment		5 ft	117			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140917	JONATHAN WAY	ARBELLA LN	STEPHANIE LN	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64320	339.9 to 340.9 feet	Vertical Change	-.29"	5 ft	5	REF		
64341	344.2 to 355.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
64342	358.2 to 359.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
64343	361.3 to 371.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
64344	371.8 to 381.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
64357	382.2 to 403.7 feet	Key Note Segment		5 ft	108			
64321	394.2 to 395.2 feet	Vertical Change	.31"	5 ft	5	REF		
64345	404.4 to 405.5 feet	Cross Slope (Driveway)	7.0-8.0%	5 ft	6	SF	$40	**$220**
64346	406.0 to 420.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
64347	421.4 to 447.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,840**
64358	448.9 to 469.6 feet	Key Note Segment		5 ft	104			
64348	471.8 to 472.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64322	474.1 to 475.1 feet	Vertical Change	-.27"	5 ft	5	REF		
64349	474.8 to 494.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,820**
64350	494.8 to 516.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
64323	495.5 to 496.5 feet	Vertical Change	.3"	5 ft	5	REF		
64359	516.8 to 536.5 feet	Key Note Segment		5 ft	99			
64324	526.7 to 527.7 feet	Vertical Change	.26"	5 ft	5	REF		
64351	537.7 to 550.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: N *side of* **JONATHAN WAY** *Starting at:* **ARBELLA LN** **$187,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140920	JONATHAN WAY	STEPHANIE LN	ARBELLA LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64374	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
64375	5.2 to 6.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
64399	9.4 to 29.3 feet	Key Note Segment		5 ft	100			
64376	29.4 to 31.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
64377	33.8 to 37.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
64378	37.7 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
64379	44.2 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
64360	51.2 to 52.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
64380	60.8 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
64381	76.8 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
64400	91.6 to 112.6 feet	Key Note Segment		5 ft	105			
64361	92.3 to 93.3 feet	**Vertical Change**	-.43"	5 ft	5	REF		
64362	102.9 to 103.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
64382	114.8 to 131.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
64383	132.3 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
64363	149.1 to 150.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
64401	155.1 to 175.3 feet	Key Note Segment		5 ft	101			
64364	155.6 to 156.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
64384	179.6 to 189.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
64385	189.9 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
64402	218.8 to 239.6 feet	Key Note Segment		5 ft	104			
64386	242.3 to 281.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,760**
64365	261.6 to 262.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
64403	281.9 to 302.9 feet	Key Note Segment		5 ft	105			
64366	283.0 to 284.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
64387	305.8 to 332.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$15,900**
64367	314.4 to 315.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
64368	325.2 to 326.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140920	JONATHAN WAY	STEPHANIE LN	ARBELLA LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64388	335.8 to 344.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
64369	335.9 to 336.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
64389	351.0 to 357.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
64390	361.4 to 383.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
64404	384.0 to 404.4 feet	Key Note Segment		5 ft	102			
64391	406.4 to 417.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
64371	418.4 to 419.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
64392	418.4 to 446.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
64405	447.8 to 467.7 feet	Key Note Segment		5 ft	100			
64372	468.5 to 471.7 feet	**Vertical Change**	-.29"	5 ft	16	REF		
64393	471.1 to 473.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
64406	474.6 to 494.8 feet	Key Note Segment		5 ft	101			
64394	495.0 to 496.0 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	5	SF	$40	**$200**
64395	499.4 to 502.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
64396	503.9 to 506.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
64397	509.2 to 514.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
64398	515.4 to 525.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
64373	523.2 to 524.2 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JONATHAN WAY** *Starting at:* **STEPHANIE LN** **$179,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311144	JOSEPH LN	132 JOSEPH LN	SONORA ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114674	0.0 to 5.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
114675	5.9 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
114676	11.9 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
114694	16.8 to 37.3 feet	Key Note Segment		5 ft	102			
114677	39.3 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
114695	42.3 to 63.1 feet	Key Note Segment		5 ft	104			
114663	53.2 to 54.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
114678	65.8 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
114679	84.3 to 85.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114680	92.2 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
114696	104.4 to 124.8 feet	Key Note Segment		5 ft	102			
114664	115.0 to 116.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
114681	126.3 to 130.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
114697	130.3 to 151.2 feet	Key Note Segment		5 ft	104			
114682	153.3 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,860**
114683	178.6 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
114684	182.5 to 190.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
114698	192.8 to 213.0 feet	Key Note Segment		5 ft	101			
114665	214.3 to 215.3 feet	**Vertical Change**	.65"	5 ft	5	REF		
114685	215.3 to 218.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
114699	220.9 to 241.3 feet	Key Note Segment		5 ft	102			
114666	221.5 to 222.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
114686	242.4 to 248.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
114687	249.3 to 265.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
114667	253.4 to 254.4 feet	**Vertical Change**	.86"	5 ft	5	REF		
114668	259.7 to 260.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
114688	268.4 to 269.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
114669	268.7 to 269.7 feet	**Vertical Change**	.4"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311144	JOSEPH LN	132 JOSEPH LN	SONORA ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114689	271.9 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
114700	281.3 to 301.2 feet	Key Note Segment		5 ft	100			
114703	300.0 to 301.0 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
114690	302.9 to 305.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
114701	306.7 to 326.6 feet	Key Note Segment		5 ft	100			
114670	317.0 to 318.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
114691	329.2 to 341.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
114704	345.2 to 346.2 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
114692	345.9 to 349.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
114702	350.0 to 370.8 feet	Key Note Segment		5 ft	104			
114671	351.0 to 352.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
114672	361.0 to 362.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
114693	372.5 to 389.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
114673	380.6 to 381.6 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JOSEPH LN** *Starting at:* **132 JOSEPH LN** **$92,898.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311140	JOSEPH LN	SONORA ST	133 JOSEPH LN	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114623	0.1 to 2.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
114624	2.3 to 3.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
114625	4.5 to 18.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
114648	18.7 to 37.7 feet	Key Note Segment		5 ft	95			
114613	28.6 to 29.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
114626	39.8 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
114627	43.8 to 47.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
114628	47.7 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
114649	62.8 to 82.7 feet	Key Note Segment		5 ft	100			
114629	85.6 to 87.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
114650	88.9 to 108.3 feet	Key Note Segment		5 ft	97			
114614	89.4 to 90.4 feet	**Vertical Change**	1.62"	5 ft	5	REF		
114615	108.3 to 109.3 feet	**Vertical Change**	-.53"	5 ft	5	REF		
114630	110.3 to 137.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,440**
114616	121.2 to 122.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
114617	136.2 to 137.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
114631	137.7 to 141.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
114632	141.9 to 144.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
114633	147.2 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
114651	150.3 to 169.6 feet	Key Note Segment		5 ft	96			
114634	171.6 to 175.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
114660	175.4 to 176.9 feet		6.0-7.0%	5 ft	8			
114661	176.9 to 178.3 feet		5.0-6.0%	5 ft	7			
114652	178.3 to 194.8 feet	Key Note Segment		5 ft	83			
114635	195.1 to 196.1 feet	**Cross Slope (Driveway)**	10.0-11.0%	5 ft	5	SF	$40	**$200**
114662	195.8 to 197.4 feet		5.0-6.0%	5 ft	8			
114636	199.2 to 207.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
114637	208.5 to 211.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311140	JOSEPH LN	SONORA ST	133 JOSEPH LN	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114638	211.2 to 237.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	133	SF	$120	**$15,900**
114618	224.5 to 225.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
114653	238.4 to 258.3 feet	Key Note Segment		5 ft	100			
114639	262.3 to 263.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
114654	264.3 to 284.3 feet	Key Note Segment		5 ft	100			
114640	285.3 to 289.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
114641	289.8 to 291.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
114642	291.2 to 298.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
114658	297.5 to 298.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
114643	299.3 to 310.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
114619	305.3 to 306.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
114644	311.0 to 321.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
114645	321.2 to 325.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
114655	325.3 to 345.7 feet	Key Note Segment		5 ft	102			
114620	326.2 to 327.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
114621	335.8 to 336.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
114646	347.6 to 351.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
114656	352.4 to 371.9 feet	Key Note Segment		5 ft	98			
114659	373.3 to 374.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
114647	374.5 to 380.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
114622	378.5 to 379.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
114657	380.6 to 397.8 feet	Key Note Segment		5 ft	86			

TOTAL COST FOR: N *side of* **JOSEPH LN** *Starting at:* **SONORA ST** **$100,178.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081047	JOSEPHINE CT	1480 JOSEPHINE CT	JERICHO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125466	3.7 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
125467	13.6 to 15.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
125468	16.6 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
125490	18.3 to 35.6 feet	Key Note Segment		5 ft	87			
125448	26.5 to 27.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
125449	36.7 to 37.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
125469	38.4 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
125470	40.3 to 43.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
125491	44.0 to 60.7 feet	Key Note Segment		5 ft	84			
125450	52.9 to 53.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
125471	64.7 to 68.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
125451	70.3 to 71.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
125472	71.6 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
125473	89.2 to 113.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,640**
125453	92.1 to 93.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
125454	103.6 to 104.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
125492	113.8 to 130.6 feet	Key Note Segment		5 ft	84			
125455	114.4 to 115.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
125474	134.2 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
125475	153.3 to 159.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
125493	161.2 to 178.8 feet	Key Note Segment		5 ft	88			
125476	180.8 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125494	185.9 to 203.0 feet	Key Note Segment		5 ft	86			
125456	194.6 to 195.6 feet	**Vertical Change**	-.39"	5 ft	5	REF		
125477	206.3 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
125478	222.5 to 233.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
125479	235.4 to 240.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
125480	240.2 to 252.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081047	JOSEPHINE CT	1480 JOSEPHINE CT	JERICHO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125481	254.7 to 256.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
125457	256.1 to 257.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
125495	256.3 to 273.8 feet	Key Note Segment		5 ft	88			
125482	276.2 to 279.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
125458	280.1 to 281.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
125496	281.1 to 299.1 feet	Key Note Segment		5 ft	90			
125459	299.0 to 300.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
125483	302.1 to 325.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,860**
125460	315.9 to 316.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
125484	327.3 to 339.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
125461	339.7 to 340.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
125485	342.3 to 351.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
125462	351.7 to 352.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
125497	351.8 to 369.6 feet	Key Note Segment		5 ft	89			
125463	370.6 to 371.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
125486	373.8 to 375.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
125498	376.1 to 394.7 feet	Key Note Segment		5 ft	93			
125487	397.4 to 401.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
125488	403.0 to 411.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
125489	411.5 to 414.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: S *side of* **JOSEPHINE CT** *Starting at:* **1480 JOSEPHINE CT** **$117,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081043	JOSEPHINE CT	1489 JOSEPHINE CT	1480 JOSEPHINE CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125439	0.0 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
125432	10.1 to 11.1 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
125440	13.2 to 18.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
125441	20.3 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
125446	39.3 to 58.4 feet	Key Note Segment		5 ft	96			
125433	58.5 to 59.5 feet	**Vertical Change**	.66"	5 ft	5	REF		
125442	67.0 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
125443	73.6 to 75.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125447	75.3 to 94.3 feet	Key Note Segment		5 ft	95			
125434	75.4 to 76.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
125435	88.1 to 89.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
125436	94.2 to 95.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
125444	95.1 to 100.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
125437	99.9 to 100.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125445	104.1 to 105.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
125438	105.4 to 106.4 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **JOSEPHINE CT** *Starting at:* **1489 JOSEPHINE CT** **$23,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081118	JOSEPHINE CT	JERICHO DR	MADISON DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125783	2.4 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
125784	9.8 to 17.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
125805	17.6 to 35.9 feet	Key Note Segment		5 ft	91			
125785	38.2 to 42.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
125806	42.2 to 60.8 feet	Key Note Segment		5 ft	93			
125786	62.5 to 64.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
125787	67.3 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,780**
125788	74.2 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
125789	103.8 to 113.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
125807	114.5 to 131.9 feet	Key Note Segment		5 ft	87			
125790	136.2 to 138.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
125808	138.8 to 156.1 feet	Key Note Segment		5 ft	86			
125791	157.8 to 166.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,980**
125792	166.1 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	**$24,540**
125768	183.9 to 184.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
125769	196.4 to 197.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
125793	207.0 to 209.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
125770	209.1 to 210.1 feet	**Vertical Change**	.75"	5 ft	5	REF		
125809	209.3 to 227.6 feet	Key Note Segment		5 ft	92			
125771	218.7 to 219.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
125772	228.3 to 229.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
125794	229.8 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125773	233.4 to 234.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
125810	234.7 to 252.1 feet	Key Note Segment		5 ft	87			
125774	252.4 to 253.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
125795	254.1 to 281.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	138	SF	$120	**$16,500**
125775	282.3 to 283.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
125796	284.1 to 295.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$7,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081118	JOSEPHINE CT	JERICHO DR	MADISON DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125797	298.5 to 307.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
125811	308.4 to 326.7 feet	Key Note Segment		5 ft	92			
125776	308.5 to 309.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
125777	317.1 to 318.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
125798	328.7 to 333.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
125812	333.8 to 351.3 feet	Key Note Segment		5 ft	88			
125778	351.8 to 352.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
125799	354.6 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
125800	361.3 to 395.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	171	SF	$120	**$20,520**
125779	390.1 to 391.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
125801	403.8 to 416.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
125780	406.7 to 407.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
125802	416.8 to 435.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
125781	424.1 to 425.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
125803	440.0 to 456.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,960**
125804	456.6 to 458.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125782	458.5 to 459.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **JOSEPHINE CT** *Starting at:* **JERICHO DR** **$161,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081123	JOSEPHINE CT	MADISON DR	SALVADOR WY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125825	4.6 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
125826	15.9 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
125827	24.2 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
125828	40.2 to 43.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
125829	51.1 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
125830	54.3 to 64.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
125853	65.0 to 66.0 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
125831	66.4 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
125854	74.9 to 75.9 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
125832	77.1 to 80.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
125833	86.5 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
125834	107.7 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
125848	110.1 to 129.3 feet	Key Note Segment		5 ft	96			
125813	122.9 to 123.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
125835	132.7 to 136.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
125849	136.3 to 155.3 feet	Key Note Segment		5 ft	95			
125836	161.1 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
125814	172.1 to 173.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
125815	180.8 to 181.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
125837	182.8 to 201.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
125816	198.0 to 199.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
125838	203.6 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
125817	206.8 to 207.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
125818	215.3 to 216.3 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
125819	224.0 to 225.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
125850	224.3 to 243.0 feet	Key Note Segment		5 ft	94			
125820	243.1 to 244.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
125839	246.3 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081123	JOSEPHINE CT	MADISON DR	SALVADOR WY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125821	249.7 to 250.7 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
125851	251.8 to 269.8 feet	Key Note Segment		5 ft	90			
125822	256.7 to 257.7 feet	Vertical Change	1.57"	5 ft	5	REF		
125840	271.1 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260
125841	280.0 to 282.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
125842	285.8 to 294.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
125823	289.0 to 290.0 feet	Vertical Change	.26"	5 ft	5	REF		
125843	296.4 to 298.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
125844	298.6 to 304.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,780
125852	306.3 to 325.3 feet	Key Note Segment		5 ft	95			
125845	328.9 to 342.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	$7,860
125846	342.2 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
125847	357.8 to 360.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,380
125824	360.1 to 361.1 feet	Vertical Change	.51"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **JOSEPHINE CT** *Starting at:* **MADISON DR** **$95,718.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081041	JOSEPHINE CT	SALVADOR WY	1501 JOSEPHINE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125406	0.7 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
125388	5.1 to 6.1 feet	**Vertical Change**	3.19"	5 ft	5	REF		
125389	7.7 to 8.7 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
125407	10.8 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
125424	23.7 to 43.5 feet	Key Note Segment		5 ft	99			
125390	24.1 to 25.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
125408	44.3 to 45.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
125425	49.9 to 69.3 feet	Key Note Segment		5 ft	97			
125409	71.3 to 73.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
125410	73.9 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
125411	85.7 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125412	103.9 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
125413	125.0 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
125426	127.5 to 147.1 feet	Key Note Segment		5 ft	98			
125414	148.3 to 149.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
125415	150.2 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
125427	153.5 to 172.5 feet	Key Note Segment		5 ft	95			
125391	172.7 to 173.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
125416	174.8 to 193.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
125417	196.5 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
125392	196.8 to 197.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
125418	211.3 to 223.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
125393	214.2 to 215.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
125419	225.8 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
125428	231.2 to 249.2 feet	Key Note Segment		5 ft	90			
125394	231.5 to 232.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
125395	244.0 to 245.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
125420	253.3 to 255.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081041	JOSEPHINE CT	SALVADOR WY	1501 JOSEPHINE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125429	256.6 to 275.7 feet	Key Note Segment		5 ft	95			
125396	269.7 to 270.7 feet	Vertical Change	.29"	5 ft	5	REF		
125397	277.9 to 278.9 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
125398	284.5 to 285.5 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
125399	292.7 to 293.7 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
125400	301.3 to 302.3 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
125421	310.1 to 334.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	$14,400
125401	318.3 to 319.3 feet	Vertical Change	.3"	5 ft	5	REF		
125430	334.9 to 353.3 feet	Key Note Segment		5 ft	92			
125402	335.3 to 336.3 feet	Vertical Change	-.26"	5 ft	5	REF		
125422	354.6 to 359.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
125431	360.3 to 379.8 feet	Key Note Segment		5 ft	98			
125403	373.9 to 374.9 feet	Vertical Change	.51"	5 ft	5	REF		
125404	377.8 to 378.8 feet	Vertical Change	.28"	5 ft	5	REF		
125423	381.3 to 385.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,460
125405	382.6 to 383.6 feet	Vertical Change	-.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **JOSEPHINE CT** *Starting at:* **SALVADOR WY** **$77,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202120948	JOY ST	1024 JOY ST	1028 JOY ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134633	21.4 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
134634	28.7 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
134635	35.6 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
134637	40.1 to 55.1 feet	Key Note Segment		4 ft	60			
134632	55.3 to 56.3 feet	**Vertical Change**	-.32"	4 ft	4	REF		
134636	57.7 to 59.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**

TOTAL COST FOR: W *side of* **JOY ST** *Starting at:* **1024 JOY ST** **$4,224.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201232	JOYA DR	556 JOYA DR	EMILY WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76569	0.0 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**

TOTAL COST FOR: S *side of* **JOYA DR** *Starting at:* **556 JOYA DR** **$12,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201231	JOYA DR	DIAMOND WAY	534 JOYA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76528	0.0 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
76529	6.0 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
76556	14.9 to 34.3 feet	Key Note Segment		5 ft	97			
76530	37.5 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
76557	40.3 to 60.3 feet	Key Note Segment		5 ft	100			
76511	57.3 to 58.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
76531	60.8 to 63.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
76532	66.1 to 68.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
76533	71.1 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
76534	75.2 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
76535	91.3 to 97.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
76558	100.3 to 120.6 feet	Key Note Segment		5 ft	102			
76512	103.9 to 104.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
76513	110.9 to 111.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
76514	117.6 to 118.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
76536	121.2 to 123.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
76559	126.3 to 146.6 feet	Key Note Segment		5 ft	102			
76515	127.4 to 128.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
76537	147.3 to 173.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	131	SF	$40	**$5,240**
76516	162.6 to 165.8 feet	**Vertical Change**	.76"	5 ft	16	REF		
76517	174.7 to 175.7 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
76538	177.8 to 187.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
76560	187.1 to 206.8 feet	Key Note Segment		5 ft	99			
76539	207.4 to 211.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	20	SF	$40	**$800**
76561	213.1 to 233.1 feet	Key Note Segment		5 ft	100			
76518	229.8 to 230.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
76540	236.5 to 261.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
76519	259.6 to 260.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201231	JOYA DR	DIAMOND WAY	534 JOYA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76541	263.4 to 271.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
76562	271.0 to 290.5 feet	Key Note Segment		5 ft	98			
76520	272.4 to 273.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
76521	280.6 to 281.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
76542	291.2 to 299.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
76563	300.5 to 320.1 feet	Key Note Segment		5 ft	98			
76522	320.3 to 323.5 feet	**Vertical Change**	.37"	5 ft	16	REF		
76543	320.9 to 329.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
76544	331.7 to 336.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
76545	338.3 to 341.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
76546	345.8 to 347.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
76523	349.3 to 350.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
76547	349.7 to 359.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
76564	359.1 to 379.6 feet	Key Note Segment		5 ft	103			
76548	380.3 to 385.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$980**
76565	385.2 to 405.9 feet	Key Note Segment		5 ft	104			
76524	405.1 to 406.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
76549	405.9 to 408.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
76550	408.9 to 423.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
76551	429.7 to 432.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
76552	434.6 to 443.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
76566	445.6 to 464.9 feet	Key Note Segment		5 ft	97			
76553	467.6 to 471.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
76567	471.3 to 491.7 feet	Key Note Segment		5 ft	102			
76525	491.4 to 492.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
76554	491.9 to 522.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	152	SF	$40	**$6,080**
76526	497.7 to 498.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
76555	526.0 to 531.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201231	JOYA DR	DIAMOND WAY	534 JOYA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76527	532.5 to 533.5 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
76568	533.0 to 551.6 feet	Key Note Segment		5 ft	93			

TOTAL COST FOR: S *side of* **JOYA DR** *Starting at:* **DIAMOND WAY** **$107,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201048	JOYA DR	EMILY WAY	DIAMOND WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75643	0.1 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
75677	16.0 to 36.3 feet	Key Note Segment		5 ft	101			
75628	16.7 to 17.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
75644	37.6 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
75678	42.2 to 63.3 feet	Key Note Segment		5 ft	106			
75645	64.1 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
75646	71.0 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
75647	76.7 to 81.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
75629	82.0 to 83.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
75648	82.0 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
75630	90.6 to 91.6 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
75649	95.6 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
75679	101.8 to 121.9 feet	Key Note Segment		5 ft	101			
75650	122.3 to 128.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	30	SF	$40	**$1,200**
75631	124.3 to 125.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
75680	128.3 to 147.9 feet	Key Note Segment		5 ft	98			
75632	148.0 to 149.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
75651	149.1 to 165.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,960**
75633	165.5 to 166.5 feet	**Vertical Change**	1.57"	5 ft	5	REF		
75652	166.4 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
75634	177.1 to 178.1 feet	**Vertical Change**	.75"	5 ft	5	REF		
75653	184.2 to 187.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
75681	187.7 to 207.4 feet	Key Note Segment		5 ft	99			
75654	209.8 to 213.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
75636	214.0 to 215.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
75682	214.3 to 234.3 feet	Key Note Segment		5 ft	100			
75655	234.9 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
75656	241.4 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201048	JOYA DR	EMILY WAY	DIAMOND WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75657	252.9 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
75637	273.3 to 274.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
75658	278.7 to 282.4 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	18	SF	$120	**$2,220**
75659	282.4 to 289.7 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	37	SF	$120	**$4,380**
75660	296.8 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
75683	301.8 to 321.9 feet	Key Note Segment		5 ft	100			
75661	323.2 to 334.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
75662	337.1 to 340.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
75663	343.6 to 356.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
75664	357.8 to 360.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
75684	360.6 to 380.9 feet	Key Note Segment		5 ft	102			
75665	381.3 to 386.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,080**
75685	388.0 to 406.0 feet	Key Note Segment		5 ft	90			
75666	406.4 to 422.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	81	SF	$40	**$3,240**
75667	437.8 to 446.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
75686	446.8 to 466.9 feet	Key Note Segment		5 ft	101			
75638	457.0 to 458.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
75668	467.7 to 468.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
75669	471.1 to 472.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
75687	473.1 to 493.8 feet	Key Note Segment		5 ft	104			
75670	494.3 to 497.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
75671	497.3 to 532.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
75688	532.5 to 554.0 feet	Key Note Segment		5 ft	108			
75641	552.9 to 553.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
75672	555.0 to 557.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
75689	558.8 to 579.3 feet	Key Note Segment		5 ft	103			
75673	580.3 to 588.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
75674	590.5 to 591.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201048	JOYA DR	EMILY WAY	DIAMOND WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75675	592.5 to 616.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,580**
75642	613.4 to 614.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
75690	616.8 to 637.3 feet	Key Note Segment		5 ft	103			
75676	637.9 to 639.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **JOYA DR** *Starting at:* **EMILY WAY** **$157,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140830	JUDITH CT	STEPHANIE LN	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63778	1.3 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
63804	26.8 to 48.3 feet	Key Note Segment		5 ft	108			
63761	38.4 to 39.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
63762	48.3 to 49.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
63779	50.8 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
63780	60.0 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
63763	61.3 to 62.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
63781	64.1 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
63764	78.2 to 79.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
63782	80.1 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
63765	84.6 to 85.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
63805	96.0 to 115.8 feet	Key Note Segment		5 ft	99			
63766	105.9 to 106.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
63783	119.4 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,460**
63767	148.5 to 149.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
63806	159.1 to 180.6 feet	Key Note Segment		5 ft	108			
63768	159.4 to 160.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
63784	183.5 to 204.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
63770	184.1 to 185.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
63785	204.8 to 211.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
63771	228.5 to 229.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
63807	228.7 to 246.5 feet	Key Note Segment		5 ft	89			
63808	261.8 to 293.2 feet	Key Note Segment		5 ft	157			
63772	299.3 to 300.3 feet	**Vertical Change**	2.58"	5 ft	5	SF	$75	**$375**
63786	307.4 to 313.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
63809	314.6 to 332.8 feet	Key Note Segment		5 ft	91			
63810	349.7 to 368.3 feet	Key Note Segment		5 ft	93			
63773	351.1 to 352.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140830	JUDITH CT	STEPHANIE LN	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63774	357.5 to 358.5 feet	Vertical Change	.27"	5 ft	5	REF		
63787	376.3 to 377.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
63775	377.3 to 378.3 feet	Vertical Change	.39"	5 ft	5	REF		
63788	382.8 to 415.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	$19,320
63811	416.4 to 436.2 feet	Key Note Segment		5 ft	99			
63789	438.8 to 440.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
63790	443.2 to 446.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
63791	449.8 to 452.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
63792	452.6 to 453.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
63793	458.3 to 473.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$8,940
63794	477.3 to 479.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
63795	485.2 to 486.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	$660
63796	486.7 to 493.3 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	33	SF	$120	$3,960
63797	496.5 to 498.3 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	9	SF	$120	$1,080
63798	503.3 to 504.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
63799	506.2 to 525.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	$11,820
63800	530.6 to 541.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	$6,420
63776	534.2 to 535.2 feet	Vertical Change	.69"	5 ft	5	REF		
63801	541.3 to 547.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
63812	549.6 to 571.2 feet	Key Note Segment		5 ft	108			
63802	572.6 to 588.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	$9,480
63803	591.8 to 603.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	$7,200
63777	599.5 to 600.5 feet	Vertical Change	-.27"	5 ft	5	REF		

TOTAL COST FOR: N / S *side of* **JUDITH CT** *Starting at:* **STEPHANIE LN** **$161,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140936	JUDITH WAY	ARBELLA LN	STEPHANIE LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64564	0.0 to 11.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
64565	14.9 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
64595	23.3 to 44.2 feet	Key Note Segment		5 ft	105			
64550	45.1 to 46.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
64566	46.4 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
64567	59.8 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
64551	66.6 to 67.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
64552	77.2 to 78.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
64568	83.3 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
64596	86.6 to 107.6 feet	Key Note Segment		5 ft	105			
64553	87.6 to 88.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
64569	110.6 to 113.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
64570	115.6 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
64554	121.4 to 122.4 feet	**Vertical Change**	-.43"	5 ft	5	REF		
64571	125.1 to 126.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
64572	128.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
64555	136.5 to 137.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
64573	139.8 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
64574	147.6 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
64556	151.0 to 152.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
64597	158.9 to 179.8 feet	Key Note Segment		5 ft	105			
64575	181.9 to 197.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
64576	197.3 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
64577	208.9 to 225.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
64578	226.2 to 233.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
64598	234.3 to 263.8 feet	Key Note Segment		5 ft	148			
64579	269.0 to 272.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
64580	274.4 to 293.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140936	JUDITH WAY	ARBELLA LN	STEPHANIE LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64581	294.8 to 306.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,260**
64599	308.6 to 329.1 feet	Key Note Segment		5 ft	102			
64582	335.9 to 355.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,640**
64583	359.3 to 371.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
64600	371.3 to 393.5 feet	Key Note Segment		5 ft	111			
64584	395.6 to 408.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
64601	409.3 to 427.7 feet	Key Note Segment		5 ft	92			
64585	430.3 to 437.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
64586	439.5 to 450.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
64587	450.8 to 463.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
64558	464.2 to 465.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
64588	467.3 to 482.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
64602	483.0 to 511.4 feet	Key Note Segment		5 ft	142			
64559	483.6 to 484.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
64589	514.0 to 516.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
64603	516.9 to 537.7 feet	Key Note Segment		5 ft	104			
64560	517.7 to 518.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
64561	527.9 to 528.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
64590	539.8 to 543.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
64591	544.3 to 580.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
64604	580.1 to 601.9 feet	Key Note Segment		5 ft	109			
64562	581.3 to 582.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
64592	603.1 to 638.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	178	SF	$120	**$21,300**
64563	618.0 to 619.0 feet	**Vertical Change**	-.55"	5 ft	5	REF		
64605	644.1 to 663.8 feet	Key Note Segment		5 ft	99			
64593	666.4 to 693.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
64594	694.7 to 699.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
64606	698.7 to 699.9 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140936	JUDITH WAY	ARBELLA LN	STEPHANIE LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **JUDITH WAY**	*Starting at:* **ARBELLA LN**					**$221,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140941	JUDITH WAY	STEPHANIE LN	ARBELLA LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64626	1.0 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
64607	2.3 to 3.3 feet	**Vertical Change**	-.5"	5 ft	5	REF		
64627	5.2 to 12.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,380**
64628	16.7 to 19.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
64629	21.7 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
64608	25.6 to 26.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
64630	28.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
64656	40.3 to 60.7 feet	Key Note Segment		5 ft	102			
64631	62.2 to 65.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
64632	68.8 to 97.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,920**
64609	93.6 to 94.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
64657	97.2 to 125.2 feet	Key Note Segment		5 ft	140			
64633	128.1 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64634	129.3 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
64635	144.1 to 145.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
64636	147.3 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
64658	170.3 to 191.0 feet	Key Note Segment		5 ft	104			
64637	196.4 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
64610	206.2 to 207.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
64659	226.8 to 254.9 feet	Key Note Segment		5 ft	141			
64638	255.4 to 256.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
64639	257.8 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64611	258.2 to 259.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
64660	262.0 to 288.9 feet	Key Note Segment		5 ft	134			
64612	270.3 to 271.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
64613	289.1 to 290.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
64640	292.9 to 325.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	161	SF	$120	**$19,260**
64661	326.1 to 348.1 feet	Key Note Segment		5 ft	110			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140941	JUDITH WAY	STEPHANIE LN	ARBELLA LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64614	326.5 to 327.5 feet	Vertical Change	.27"	5 ft	5	REF		
64641	348.5 to 351.7 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	16	SF	$40	**$640**
64642	351.7 to 391.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	198	SF	$120	**$23,700**
64615	362.8 to 363.8 feet	Vertical Change	.32"	5 ft	5	REF		
64616	377.9 to 378.9 feet	Vertical Change	.41"	5 ft	5	REF		
64662	391.2 to 418.9 feet	Key Note Segment		5 ft	139			
64643	420.8 to 455.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,700**
64617	427.8 to 428.8 feet	Vertical Change	.36"	5 ft	5	REF		
64618	442.5 to 443.5 feet	Vertical Change	.33"	5 ft	5	REF		
64663	455.3 to 475.6 feet	Key Note Segment		5 ft	102			
64644	478.0 to 495.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
64645	495.2 to 516.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
64646	517.1 to 525.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,220**
64620	530.4 to 531.4 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
64647	531.7 to 556.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	**$15,060**
64664	556.8 to 579.2 feet	Key Note Segment		5 ft	112			
64648	579.3 to 586.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	35	SF	$40	**$1,380**
64649	588.3 to 613.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
64621	600.3 to 601.3 feet	Vertical Change	3.48"	5 ft	5	REF		
64650	618.6 to 620.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
64622	621.6 to 622.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
64665	621.7 to 642.4 feet	Key Note Segment		5 ft	103			
64651	643.7 to 662.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
64652	664.6 to 671.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
64623	671.8 to 672.8 feet	Vertical Change	.26"	5 ft	5	REF		
64653	672.8 to 685.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
64666	685.2 to 705.5 feet	Key Note Segment		5 ft	102			
64624	706.0 to 707.0 feet	Vertical Change	-.76"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140941	JUDITH WAY	STEPHANIE LN	ARBELLA LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64654	708.3 to 731.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
64655	733.9 to 742.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
64625	734.9 to 735.9 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **JUDITH WAY** *Starting at:* **STEPHANIE LN** **$246,870.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071255	KATHRYN AVE	1104 KATHRYN AVE	1110 KATHRYN AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123535	0.0 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
123537	2.3 to 22.6 feet	Key Note Segment		5 ft	102			
123533	3.1 to 4.1 feet	**Vertical Change**	-.81"	5 ft	5	REF		
123534	23.1 to 24.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
123536	25.3 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **KATHRYN AVE** *Starting at:* **1104 KATHRYN AVE** **$1,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071257	KATHRYN AVE	1110 KATHRYN AVE	AMY AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123547	0.0 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
123538	0.3 to 1.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
123539	2.9 to 3.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
123555	7.6 to 27.7 feet	Key Note Segment		5 ft	101			
123540	7.9 to 8.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
123541	15.5 to 16.5 feet	**Vertical Change**	3.44"	5 ft	5	REF		
123548	30.3 to 55.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
123542	34.6 to 35.6 feet	**Vertical Change**	3.24"	5 ft	5	REF		
123543	40.7 to 41.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
123549	55.5 to 60.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
123550	60.8 to 62.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
123544	61.3 to 62.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
123551	64.1 to 73.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
123552	73.7 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
123556	75.7 to 95.6 feet	Key Note Segment		5 ft	100			
123545	76.9 to 77.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
123546	95.9 to 96.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
123553	96.8 to 100.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
123557	101.9 to 121.6 feet	Key Note Segment		5 ft	99			
123554	123.7 to 142.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**

TOTAL COST FOR: S *side of* **KATHRYN AVE** *Starting at:* **1110 KATHRYN AVE** **$42,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071549	KATHRYN AVE	1310 KATHRYN AVE	1419 KATHRYN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124873	16.6 to 17.6 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
124886	30.3 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	$15,000
124874	51.3 to 52.3 feet	Vertical Change	1.04"	5 ft	5	REF		
124898	55.3 to 74.2 feet	Key Note Segment		5 ft	95			
124875	55.7 to 56.7 feet	Vertical Change	-.33"	5 ft	5	REF		
124876	74.4 to 75.4 feet	Vertical Change	.26"	5 ft	5	REF		
124887	76.6 to 77.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
124888	78.2 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
124899	80.8 to 100.8 feet	Key Note Segment		5 ft	100			
124877	81.6 to 82.6 feet	Vertical Change	.7"	5 ft	5	REF		
124878	84.1 to 85.1 feet	Vertical Change	1.72"	5 ft	5	REF		
124879	90.9 to 91.9 feet	Vertical Change	.27"	5 ft	5	REF		
124880	100.7 to 101.7 feet	Vertical Change	-.35"	5 ft	5	REF		
124889	102.8 to 108.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,420
124881	113.7 to 114.7 feet	Vertical Change	.34"	5 ft	5	REF		
124890	114.0 to 124.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
124891	124.8 to 135.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	$6,600
124892	136.1 to 138.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,260
124900	138.6 to 158.9 feet	Key Note Segment		5 ft	102			
124882	139.9 to 140.9 feet	Vertical Change	-.26"	5 ft	5	REF		
124893	161.8 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
124894	172.2 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
124895	175.3 to 182.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
124901	182.2 to 202.4 feet	Key Note Segment		5 ft	101			
124884	196.7 to 197.7 feet	Vertical Change	.39"	5 ft	5	REF		
124885	202.7 to 203.7 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
124896	204.3 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
124897	214.1 to 216.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,260

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071549	KATHRYN AVE	1310 KATHRYN AVE	1419 KATHRYN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **KATHRYN AVE**	*Starting at:* **1310 KATHRYN AVE**					**$53,370.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071552	KATHRYN AVE	1317 KATHRYN AVE	ANNA AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124928	0.5 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
124929	12.8 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
124930	24.9 to 26.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
124923	26.4 to 27.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
124936	26.4 to 45.1 feet	Key Note Segment		5 ft	94			
124924	36.0 to 37.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
124925	45.6 to 46.6 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
124931	47.2 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
124932	48.6 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
124937	52.1 to 71.5 feet	Key Note Segment		5 ft	97			
124926	52.2 to 53.2 feet	**Vertical Change**	.77"	5 ft	5	REF		
124927	71.7 to 72.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
124933	73.0 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
124934	75.7 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
124935	86.5 to 92.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: N *side of* **KATHRYN AVE** *Starting at:* **1317 KATHRYN AVE** **$25,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071550	KATHRYN AVE	1419 KATHRYN AVE	1325 KATHRYN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124919	3.7 to 21.0 feet	Key Note Segment		5 ft	87			
124912	23.8 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
124902	24.6 to 25.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
124920	25.2 to 44.5 feet	Key Note Segment		5 ft	97			
124903	44.6 to 45.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
124913	46.1 to 51.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
124904	52.4 to 53.4 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
124914	62.8 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
124921	70.3 to 90.3 feet	Key Note Segment		5 ft	100			
124905	71.1 to 72.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
124906	90.6 to 91.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124915	92.3 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
124907	101.5 to 102.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
124908	111.1 to 112.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
124916	114.0 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
124917	121.7 to 125.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
124909	122.0 to 123.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
124918	125.8 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
124922	128.6 to 148.4 feet	Key Note Segment		5 ft	99			
124910	129.4 to 130.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
124911	148.4 to 149.4 feet	**Vertical Change**	.8"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **KATHRYN AVE** *Starting at:* **1419 KATHRYN AVE** **$29,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071546	KATHRYN AVE	AMY AVE	1304 KATHRYN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124853	0.0 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
124854	4.7 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
124868	19.5 to 39.3 feet	Key Note Segment		5 ft	99			
124843	20.5 to 21.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
124844	29.8 to 30.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
124845	39.3 to 40.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
124855	42.5 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
124869	45.6 to 64.8 feet	Key Note Segment		5 ft	96			
124846	45.9 to 46.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
124856	65.5 to 68.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
124857	69.1 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
124858	71.3 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
124859	81.5 to 84.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
124860	85.2 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
124847	85.5 to 86.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
124861	103.3 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
124862	120.8 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
124870	123.1 to 142.6 feet	Key Note Segment		5 ft	98			
124848	133.3 to 134.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
124871	149.2 to 168.3 feet	Key Note Segment		5 ft	96			
124849	149.7 to 150.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
124850	159.2 to 160.2 feet	**Vertical Change**	-.59"	5 ft	5	REF		
124863	169.8 to 170.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
124864	171.3 to 178.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
124865	181.5 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
124851	199.4 to 200.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
124866	200.1 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
124867	213.7 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071546	KATHRYN AVE	AMY AVE	1304 KATHRYN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124872	226.8 to 246.1 feet	Key Note Segment		5 ft	97			
124852	246.2 to 247.2 feet	**Vertical Change**	1.39"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **KATHRYN AVE** *Starting at:* **AMY AVE** **$49,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071253	KATHRYN AVE	ANNA AVE	1104 KATHRYN AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123495	0.3 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
123522	19.3 to 38.3 feet	Key Note Segment		5 ft	95			
123496	40.5 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
123523	45.0 to 64.4 feet	Key Note Segment		5 ft	97			
123476	64.9 to 65.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
123497	66.4 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
123477	78.0 to 79.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
123498	81.0 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
123499	90.7 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
123500	99.3 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
123501	103.3 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
123502	110.3 to 117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
123524	117.6 to 136.6 feet	Key Note Segment		5 ft	95			
123478	136.2 to 137.2 feet	**Vertical Change**	.75"	5 ft	5	REF		
123503	139.8 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
123525	143.1 to 162.9 feet	Key Note Segment		5 ft	99			
123479	143.8 to 144.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
123480	145.9 to 146.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
123504	164.5 to 185.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
123481	178.3 to 179.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
123505	185.7 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
123506	203.8 to 216.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
123526	216.9 to 236.3 feet	Key Note Segment		5 ft	97			
123482	217.3 to 218.3 feet	**Vertical Change**	.58"	5 ft	5	REF		
123483	236.5 to 237.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
123507	238.4 to 241.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
123527	242.3 to 262.4 feet	Key Note Segment		5 ft	100			
123484	243.4 to 244.4 feet	**Vertical Change**	-.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071253	KATHRYN AVE	ANNA AVE	1104 KATHRYN AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123485	262.6 to 263.6 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
123508	264.2 to 279.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	$9,300
123509	279.7 to 281.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
123510	281.7 to 288.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
123511	291.5 to 293.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
123512	296.0 to 297.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
123513	297.5 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,880
123528	312.6 to 332.5 feet	Key Note Segment		5 ft	99			
123487	332.3 to 333.3 feet	Vertical Change	.42"	5 ft	5	REF		
123514	336.9 to 339.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
123529	339.3 to 358.4 feet	Key Note Segment		5 ft	96			
123488	339.8 to 340.8 feet	Vertical Change	.35"	5 ft	5	REF		
123490	358.7 to 359.7 feet	Vertical Change	-.26"	5 ft	5	REF		
123515	359.3 to 369.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,820
123516	369.8 to 371.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
123517	373.5 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
123491	375.5 to 376.5 feet	Vertical Change	.27"	5 ft	5	REF		
123518	383.5 to 402.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,100
123530	402.5 to 422.0 feet	Key Note Segment		5 ft	98			
123492	403.6 to 404.6 feet	Vertical Change	.33"	5 ft	5	REF		
123532	422.0 to 423.1 feet		5.0-6.0%	5 ft	6			
123493	422.1 to 423.1 feet	Vertical Change	.31"	5 ft	5	REF		
123519	423.8 to 424.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
123520	425.3 to 428.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
123531	430.8 to 450.0 feet	Key Note Segment		5 ft	96			
123494	450.8 to 451.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
123521	454.8 to 456.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960

TOTAL COST FOR: N *side of* **KATHRYN AVE** *Starting at:* **ANNA AVE** **$122,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161136	KELSEY LN	KENT DR	ZAK WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86011	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
86012	3.9 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
86045	9.2 to 39.4 feet	Key Note Segment		5 ft	151			
86000	42.4 to 43.4 feet	**Vertical Change**	.82"	5 ft	5	REF		
86013	43.3 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
86014	64.0 to 68.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
86046	70.5 to 92.1 feet	Key Note Segment		5 ft	108			
86001	81.7 to 82.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
86015	93.3 to 95.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
86016	97.2 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
86047	99.3 to 118.9 feet	Key Note Segment		5 ft	98			
86017	121.0 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86018	124.5 to 127.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
86019	131.4 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
86020	135.3 to 137.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
86021	142.1 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
86048	153.6 to 175.1 feet	Key Note Segment		5 ft	108			
86002	154.6 to 155.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
86003	175.2 to 176.2 feet	**Vertical Change**	-.47"	5 ft	5	REF		
86022	179.5 to 180.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
86023	182.6 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
86004	190.3 to 191.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
86024	199.3 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
86049	206.8 to 226.9 feet	Key Note Segment		5 ft	101			
86025	230.9 to 235.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
86026	235.2 to 241.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
86027	245.8 to 247.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
86028	252.0 to 264.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161136	KELSEY LN	KENT DR	ZAK WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86029	266.8 to 271.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
86005	269.3 to 270.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
86030	274.2 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
86031	281.6 to 283.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
86050	283.8 to 305.9 feet	Key Note Segment		5 ft	110			
86032	306.6 to 307.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
86033	309.8 to 314.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
86051	316.9 to 347.8 feet	Key Note Segment		5 ft	155			
86006	348.3 to 349.3 feet	**Vertical Change**	.6"	5 ft	5	REF		
86034	351.3 to 359.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
86007	357.2 to 358.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
86035	361.5 to 364.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
86008	366.0 to 367.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
86036	366.7 to 370.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86037	373.6 to 379.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
86038	381.6 to 382.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86039	383.6 to 391.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
86052	391.8 to 413.8 feet	Key Note Segment		5 ft	110			
86009	393.0 to 394.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
86010	403.3 to 404.3 feet	**Vertical Change**	-.44"	5 ft	5	REF		
86040	413.8 to 434.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	105	SF	$40	**$4,180**
86041	434.7 to 440.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
86042	440.8 to 444.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
86053	444.9 to 466.8 feet	Key Note Segment		5 ft	110			
86043	468.5 to 476.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
86054	476.9 to 503.8 feet	Key Note Segment		5 ft	135			
86044	506.0 to 515.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: S *side of* **KELSEY LN** *Starting at:* **KENT DR** **$111,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161139	KELSEY LN	ZAK WAY	KENT DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86072	0.1 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
86105	10.7 to 39.1 feet	Key Note Segment		5 ft	142			
86055	22.1 to 23.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
86073	39.2 to 40.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$220**
86074	40.3 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
86075	44.2 to 45.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
86076	47.4 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
86106	63.5 to 92.3 feet	Key Note Segment		5 ft	144			
86077	93.3 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
86078	95.2 to 100.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
86056	96.8 to 97.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
86079	102.8 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
86080	106.6 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
86107	123.8 to 144.6 feet	Key Note Segment		5 ft	104			
86057	134.8 to 135.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
86058	145.3 to 146.3 feet	**Vertical Change**	-.5"	5 ft	5	REF		
86081	149.6 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
86059	150.7 to 151.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
86060	154.7 to 155.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
86082	156.7 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
86083	169.4 to 175.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
86108	178.3 to 199.3 feet	Key Note Segment		5 ft	105			
86084	202.5 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
86061	204.8 to 205.8 feet	**Vertical Change**	1.01"	5 ft	5	REF		
86085	205.6 to 207.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
86086	209.2 to 211.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
86087	212.7 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
86088	219.4 to 224.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161139	KELSEY LN	ZAK WAY	KENT DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86062	219.6 to 220.6 feet	Vertical Change	.26"	5 ft	5	REF		
86109	225.8 to 246.0 feet	Key Note Segment		5 ft	101			
86063	226.7 to 227.7 feet	Vertical Change	-.52"	5 ft	5	REF		
86064	236.2 to 237.2 feet	Vertical Change	.3"	5 ft	5	REF		
86065	245.8 to 246.8 feet	Vertical Change	.46"	5 ft	5	REF		
86089	247.6 to 254.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
86066	253.5 to 254.5 feet	Vertical Change	-.36"	5 ft	5	REF		
86090	254.9 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
86091	258.8 to 263.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
86092	263.7 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
86067	271.1 to 272.1 feet	Vertical Change	-.27"	5 ft	5	REF		
86093	275.0 to 277.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
86094	279.9 to 284.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
86110	284.7 to 307.1 feet	Key Note Segment		5 ft	112			
86068	307.0 to 308.0 feet	Vertical Change	.77"	5 ft	5	REF		
86095	310.3 to 311.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
86096	312.4 to 322.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
86097	331.8 to 338.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
86111	339.5 to 361.2 feet	Key Note Segment		5 ft	109			
86069	361.2 to 362.2 feet	Vertical Change	.75"	5 ft	5	REF		
86098	366.1 to 373.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
86099	383.1 to 391.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
86112	392.7 to 414.9 feet	Key Note Segment		5 ft	111			
86100	416.3 to 437.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
86101	438.0 to 439.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
86113	440.3 to 469.3 feet	Key Note Segment		5 ft	145			
86070	441.1 to 442.1 feet	Vertical Change	-.26"	5 ft	5	REF		
86071	451.1 to 452.1 feet	Vertical Change	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161139	KELSEY LN	ZAK WAY	KENT DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86102	470.7 to 471.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
86103	473.5 to 476.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
86114	477.1 to 505.0 feet	Key Note Segment		5 ft	140			
86104	508.6 to 516.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: N *side of* **KELSEY LN** *Starting at:* **ZAK WAY** **$112,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120843	KENNEDY ST	2085 AVE 16	2085 AVE 16	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134512	10.5 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
134513	27.3 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
134514	30.6 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
134515	38.0 to 40.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **2085 AVE 16** **$8,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120845	KENNEDY ST	2095 KENNEDY ST	N SCHNOOR AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134516	0.0 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	31	SF	$120	**$3,672**
134517	3.9 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	26	SF	$120	**$3,132**
134518	10.2 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	21	SF	$120	**$2,484**
134519	18.2 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	136	SF	$120	**$16,308**

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **2095 KENNEDY ST** **$25,596.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111752	KENNEDY ST	2140 KENNEDY ST	N SCHNOOR AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134491	0.4 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	276	SF	$120	**$33,120**
134492	37.3 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,248**
134493	42.2 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	31	SF	$120	**$3,744**
134494	49.7 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,792**
134483	53.0 to 54.0 feet	**Vertical Change**	3.56"	8 ft	8	REF		
134495	73.5 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	116	SF	$120	**$13,920**
134484	121.9 to 122.9 feet	**Vertical Change**	.42"	8 ft	8	LF	$75	**$600**
134485	161.6 to 162.6 feet	**Vertical Change**	-.27"	8 ft	8	LF	$75	**$600**
134486	166.3 to 167.3 feet	**Vertical Change**	-.27"	8 ft	8	LF	$75	**$600**
134496	208.3 to 236.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	226	SF	$120	**$27,168**
134487	230.0 to 231.0 feet	**Vertical Change**	-.29"	8 ft	8	REF		
134497	238.8 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	81	SF	$120	**$9,696**
134488	243.0 to 244.0 feet	**Vertical Change**	.28"	8 ft	8	REF		
134498	255.3 to 259.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,128**
134499	264.0 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	174	SF	$120	**$20,928**
134500	289.1 to 291.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,400**
134490	290.4 to 291.4 feet	**Vertical Change**	.26"	8 ft	8	REF		

TOTAL COST FOR: S *side of* **KENNEDY ST** *Starting at:* **2140 KENNEDY ST** **$127,944.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120902	KENNEDY ST	2179 KENNEDY ST	24925 KENNEDY ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134598	0.5 to 1.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	11	SF	$120	**$1,296**
134599	3.8 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	37	SF	$120	**$4,428**
134600	13.2 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	54	SF	$120	**$6,480**
134601	24.8 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	44	SF	$120	**$5,292**
134590	26.4 to 27.4 feet	**Vertical Change**	.43"	9 ft	9	REF		
134602	32.1 to 33.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	14	SF	$120	**$1,728**
134603	36.5 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	39	SF	$120	**$4,644**
134604	41.8 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	22	SF	$120	**$2,592**
134605	49.8 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	149	SF	$120	**$17,820**
134625	66.3 to 97.5 feet	Key Note Segment		9 ft	281			
134591	83.7 to 84.7 feet	**Vertical Change**	.38"	9 ft	9	REF		
134606	99.0 to 100.6 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	14	SF	$120	**$1,728**
134607	100.9 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	91	SF	$120	**$10,908**
134608	113.4 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	69	SF	$120	**$8,316**
134609	123.3 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	15	SF	$120	**$1,836**
134610	130.4 to 133.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	24	SF	$120	**$2,916**
134611	136.9 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	26	SF	$120	**$3,132**
134612	141.2 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	128	SF	$120	**$15,336**
134613	157.6 to 158.9 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	12	SF	$120	**$1,404**
134614	161.6 to 181.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	175	SF	$120	**$20,952**
134626	181.3 to 206.3 feet	Key Note Segment		9 ft	225			
134592	195.0 to 196.0 feet	**Vertical Change**	.7"	9 ft	9	REF		
134615	206.3 to 212.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	54	SF	$40	**$2,160**
134616	213.4 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	152	SF	$120	**$18,252**
134617	232.7 to 239.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	61	SF	$120	**$7,344**
134618	239.5 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	104	SF	$120	**$12,528**
134619	253.8 to 265.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	103	SF	$120	**$12,312**
134620	267.3 to 300.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	294	SF	$120	**$35,316**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120902	KENNEDY ST	2179 KENNEDY ST	24925 KENNEDY ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134593	277.3 to 278.3 feet	Vertical Change	2.24"	9 ft	9	REF		
134621	300.2 to 306.5 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	57	SF	$120	**$6,804**
134594	301.1 to 302.1 feet	Vertical Change	.4"	9 ft	9	REF		
134622	308.6 to 311.9 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	30	SF	$120	**$3,564**
134623	313.1 to 330.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	159	SF	$120	**$19,116**
134595	318.2 to 319.2 feet	Vertical Change	.26"	9 ft	9	REF		
134596	335.6 to 336.6 feet	Vertical Change	.76"	9 ft	9	REF		
134624	336.3 to 347.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	104	SF	$120	**$12,420**
134597	352.3 to 353.3 feet	Vertical Change	.51"	9 ft	9	SF	$75	**$675**

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **2179 KENNEDY ST** **$241,299.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120841	KENNEDY ST	25353 KENNEDY ST	25353 KENNEDY ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134502	0.7 to 7.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
134507	4.0 to 5.0 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
134503	8.1 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
134504	21.3 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
134501	24.3 to 25.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
134505	36.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
134506	43.1 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **25353 KENNEDY ST** **$16,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202120842	KENNEDY ST	25353 KENNEDY ST	25353 KENNEDY ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134508	0.0 to 5.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
134509	5.9 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
134510	10.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
134511	10.6 to 11.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **25353 KENNEDY ST** **$4,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/NE	2202111715	KENNEDY ST	CURB RAMP	ELLIS ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134023	0.3 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
134024	3.4 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
134025	31.4 to 38.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
134026	38.8 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
134027	45.4 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
134015	51.5 to 52.5 feet	**Vertical Change**	.71"	5 ft	5	REF		
134028	56.3 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
134029	63.5 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
134016	67.0 to 68.0 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
134030	70.3 to 73.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
134031	76.2 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
134017	78.8 to 79.8 feet	**Vertical Change**	.58"	5 ft	5	REF		
134032	81.6 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
134018	88.7 to 89.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
134033	93.7 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
134034	102.5 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
134035	108.4 to 112.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
134036	117.8 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
134037	121.8 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
134056	128.1 to 163.2 feet	Key Note Segment		5 ft	175			
134038	168.9 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
134039	186.0 to 204.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
134040	213.3 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
134041	220.0 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
134042	228.3 to 264.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,780**
134019	241.4 to 242.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
134020	272.2 to 273.2 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
134057	277.2 to 294.5 feet	Key Note Segment		5 ft	87			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/NE	2202111715	KENNEDY ST	CURB RAMP	ELLIS ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134043	296.8 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
134044	309.4 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
134045	324.5 to 327.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
134046	342.8 to 360.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
134021	352.6 to 353.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
134047	364.6 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
134048	370.9 to 384.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
134022	386.4 to 387.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
134049	389.5 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
134050	406.6 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
134051	411.2 to 419.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
134052	437.4 to 441.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
134053	445.8 to 449.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
134054	456.2 to 461.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
134055	466.5 to 467.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
134058	472.4 to 474.0 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N/NE *side of* **KENNEDY ST** *Starting at:* **CURB RAMP** **$126,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW/N	2202120858	KENNEDY ST	KENNEDY ST	2169 KENNEDY ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134534	0.0 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,940**
134535	22.0 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
134536	41.8 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
134520	44.3 to 45.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
134537	52.0 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
134538	59.7 to 66.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
134539	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
134540	74.8 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
134585	85.5 to 108.0 feet	Key Note Segment		5 ft	113			
134521	108.1 to 109.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
134541	115.8 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
134542	126.5 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
134586	133.7 to 170.8 feet	Key Note Segment		5 ft	186			
134522	134.1 to 135.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
134523	171.1 to 172.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
134543	174.3 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
134544	180.0 to 181.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
134587	183.5 to 205.6 feet	Key Note Segment		5 ft	111			
134545	215.1 to 216.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
134546	216.9 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
134547	236.9 to 240.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
134548	244.7 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
134524	263.4 to 264.4 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
134549	272.2 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
134588	276.7 to 298.6 feet	Key Note Segment		5 ft	110			
134550	299.8 to 304.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
134551	319.4 to 324.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
134526	336.2 to 337.2 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW/N	2202120858	KENNEDY ST	KENNEDY ST	2169 KENNEDY ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134552	343.8 to 347.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
134553	350.4 to 353.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
134589	375.7 to 394.7 feet	Key Note Segment		5 ft	95			
134527	378.9 to 379.9 feet	Vertical Change	.29"	5 ft	5	REF		
134528	393.1 to 394.1 feet	Vertical Change	.45"	5 ft	5	REF		
134554	395.1 to 399.2 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	21	SF	$40	$820
134555	400.8 to 423.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	$13,320
134529	414.0 to 415.0 feet	Vertical Change	.59"	5 ft	5	REF		
134556	426.0 to 436.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	$6,180
134557	436.7 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
134558	452.6 to 467.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
134559	473.4 to 484.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,780
134560	495.6 to 497.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
134561	504.1 to 506.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
134562	512.2 to 514.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,140
134530	513.6 to 514.6 feet	Vertical Change	.3"	5 ft	5	REF		
134563	522.5 to 530.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
134564	547.5 to 553.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
134565	557.7 to 561.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
134566	570.2 to 583.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160
134531	582.5 to 583.5 feet	Vertical Change	.44"	5 ft	5	REF		
134567	590.7 to 593.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,740
134568	599.8 to 604.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
134569	609.6 to 615.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
134570	620.1 to 623.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
134571	628.8 to 638.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
134532	638.8 to 639.8 feet	Vertical Change	.28"	5 ft	5	REF		
134572	648.5 to 659.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW/N	2202120858	KENNEDY ST	KENNEDY ST	2169 KENNEDY ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134573	661.2 to 663.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
134574	670.7 to 673.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
134575	681.3 to 685.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
134576	687.6 to 693.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
134577	698.8 to 701.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
134578	704.2 to 708.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
134579	710.9 to 720.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
134580	721.9 to 740.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
134581	750.8 to 751.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
134582	755.9 to 778.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
134533	766.1 to 767.1 feet	**Vertical Change**	1.29"	5 ft	5	REF		
134583	781.5 to 785.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
134584	787.4 to 838.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	257	SF	$120	**$30,780**

TOTAL COST FOR: NW/N *side of* **KENNEDY ST** *Starting at:* **KENNEDY ST** **$237,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202120919	KENNEDY ST	MARKETPLACE DR	2295 MARKETPLACE DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134630	106.6 to 107.6 feet	Vertical Change	.31"	9 ft	9	LF	$75	**$675**
134631	124.5 to 125.5 feet	Vertical Change	.3"	9 ft	9	LF	$75	**$675**

TOTAL COST FOR: S *side of* **KENNEDY ST** *Starting at:* **MARKETPLACE DR** **$1,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111710	KENNEDY ST	N SCHNOOR AVE	CURB RAMP	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134011	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
134012	4.7 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
134013	14.7 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
134014	67.3 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: N *side of* **KENNEDY ST** *Starting at:* **N SCHNOOR AVE** **$8,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202120917	KENNEDY ST	N SCHNOOR AVE	2290 MARKETPLACE DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134629	63.6 to 66.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	22	SF	$120	**$2,700**
134628	64.5 to 65.5 feet	**Vertical Change**	-.29"	9 ft	9	REF		

TOTAL COST FOR: S *side of* **KENNEDY ST** *Starting at:* **N SCHNOOR AVE** **$2,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111248	KENNEY CT	A ST	A ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59413	0.0 to 11.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,156**
59414	11.7 to 13.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
59415	22.0 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
59439	31.2 to 45.8 feet	Key Note Segment		5 ft	66			
59409	44.2 to 45.2 feet	**Vertical Change**	-.49"	5 ft	5	REF		
59440	52.4 to 66.3 feet	Key Note Segment		5 ft	63			
59416	67.2 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
59417	75.8 to 104.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,714**
59410	91.9 to 92.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
59418	104.9 to 106.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$594**
59419	106.0 to 110.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,592**
59420	114.2 to 120.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,186**
59421	120.1 to 121.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
59422	122.0 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
59411	122.5 to 123.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
59441	124.8 to 138.1 feet	Key Note Segment		5 ft	60			
59442	142.3 to 155.5 feet	Key Note Segment		5 ft	59			
59423	156.6 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,564**
59424	163.2 to 181.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,990**
59443	182.3 to 197.0 feet	Key Note Segment		5 ft	66			
59425	199.5 to 201.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
59444	201.5 to 215.9 feet	Key Note Segment		5 ft	65			
59426	219.8 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
59427	226.0 to 240.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
59445	240.8 to 255.7 feet	Key Note Segment		5 ft	67			
59446	258.9 to 273.3 feet	Key Note Segment		5 ft	65			
59412	271.7 to 272.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
59428	275.9 to 288.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,966**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111248	KENNEY CT	A ST	A ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59429	289.8 to 295.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
59430	295.8 to 298.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,350**
59431	298.6 to 308.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,292**
59432	309.8 to 321.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
59433	322.4 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,456**
59447	328.8 to 343.8 feet	Key Note Segment		5 ft	68			
59434	344.5 to 349.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	21	SF	$40	**$846**
59448	350.1 to 364.6 feet	Key Note Segment		5 ft	65			
59435	365.1 to 371.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,170**
59436	371.6 to 375.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,214**
59437	376.2 to 395.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,422**
59438	396.1 to 397.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
59449	396.3 to 397.7 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **KENNEY CT** *Starting at:* **A ST** **$101,862.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161046	KENT DR	AVALON AVE	CAMBRIA AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85421	2.3 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
85479	7.2 to 28.2 feet	Key Note Segment		5 ft	105			
85395	17.7 to 18.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
85422	32.9 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
85480	51.9 to 80.5 feet	Key Note Segment		5 ft	143			
85423	81.9 to 86.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
85424	86.9 to 90.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
85425	93.0 to 95.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
85426	96.4 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
85427	102.4 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
85428	110.8 to 112.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85429	118.0 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
85430	125.5 to 133.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
85431	135.6 to 139.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
85481	139.0 to 159.7 feet	Key Note Segment		5 ft	103			
85397	164.0 to 165.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85432	164.3 to 169.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
85482	170.9 to 192.6 feet	Key Note Segment		5 ft	109			
85398	182.5 to 183.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
85399	192.8 to 193.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
85433	194.3 to 209.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
85434	210.8 to 216.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
85400	213.6 to 214.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
85435	220.3 to 223.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
85436	223.3 to 227.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
85437	227.1 to 246.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
85483	246.4 to 269.0 feet	Key Note Segment		5 ft	113			
85401	247.6 to 248.6 feet	**Vertical Change**	.58"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161046	KENT DR	AVALON AVE	CAMBRIA AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85438	272.3 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
85484	275.3 to 296.8 feet	Key Note Segment		5 ft	108			
85402	275.9 to 276.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
85439	297.6 to 299.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
85440	301.1 to 305.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	23	SF	$120	**$2,700**
85403	303.2 to 304.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
85404	305.5 to 306.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85441	309.1 to 319.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	51	SF	$120	**$6,120**
85405	314.6 to 315.6 feet	**Vertical Change**	.68"	5 ft	5	REF		
85442	322.3 to 330.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
85443	332.8 to 341.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
85444	341.3 to 343.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
85445	343.8 to 345.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85485	345.4 to 371.5 feet	Key Note Segment		5 ft	131			
85446	371.5 to 375.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	22	SF	$40	**$860**
85406	374.6 to 375.6 feet	**Vertical Change**	-.57"	5 ft	5	REF		
85447	377.1 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
85486	404.2 to 425.7 feet	Key Note Segment		5 ft	108			
85407	407.9 to 408.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
85448	428.7 to 431.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
85408	431.3 to 432.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
85487	431.8 to 452.8 feet	Key Note Segment		5 ft	105			
85449	455.5 to 463.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
85450	466.3 to 483.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
85488	485.0 to 504.8 feet	Key Note Segment		5 ft	99			
85409	485.2 to 486.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
85451	506.4 to 508.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
85452	510.3 to 525.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161046	KENT DR	AVALON AVE	CAMBRIA AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85410	518.2 to 519.2 feet	Vertical Change	.26"	5 ft	5	REF		
85453	526.8 to 530.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$1,980
85454	530.3 to 532.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
85455	532.8 to 534.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
85489	535.6 to 557.0 feet	Key Note Segment		5 ft	107			
85456	557.0 to 566.2 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	46	SF	$40	$1,840
85457	568.2 to 571.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
85458	574.0 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,180
85459	584.3 to 586.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
85411	585.3 to 586.3 feet	Vertical Change	.35"	5 ft	5	REF		
85460	586.3 to 606.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,300
85412	598.3 to 599.3 feet	Vertical Change	.27"	5 ft	5	REF		
85490	612.6 to 634.2 feet	Key Note Segment		5 ft	108			
85413	623.8 to 624.8 feet	Vertical Change	.48"	5 ft	5	REF		
85461	638.3 to 641.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
85462	642.6 to 646.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,340
85414	646.2 to 647.2 feet	Vertical Change	-.27"	5 ft	5	REF		
85463	647.6 to 661.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	$8,040
85415	652.6 to 653.6 feet	Vertical Change	.32"	5 ft	5	REF		
85491	662.9 to 682.9 feet	Key Note Segment		5 ft	100			
85416	673.1 to 674.1 feet	Vertical Change	.41"	5 ft	5	REF		
85464	683.8 to 686.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
85465	689.0 to 709.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	$12,420
85417	689.3 to 690.3 feet	Vertical Change	-.28"	5 ft	5	REF		
85466	713.6 to 715.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
85492	716.4 to 738.0 feet	Key Note Segment		5 ft	108			
85467	738.5 to 741.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	15	SF	$40	$600
85493	742.9 to 763.9 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161046	KENT DR	AVALON AVE	CAMBRIA AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85468	765.3 to 784.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
85469	786.9 to 790.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
85470	792.9 to 795.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
85471	798.0 to 799.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
85472	803.1 to 808.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
85473	809.8 to 817.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
85474	817.6 to 821.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
85494	821.4 to 842.4 feet	Key Note Segment		5 ft	105			
85475	842.9 to 847.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
85495	849.0 to 870.7 feet	Key Note Segment		5 ft	109			
85418	870.8 to 871.8 feet	**Vertical Change**	-.37"	5 ft	5	REF		
85476	871.0 to 872.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
85477	872.4 to 877.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
85419	876.8 to 877.8 feet	**Vertical Change**	.45"	5 ft	5	REF		
85478	880.8 to 893.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
85420	893.4 to 894.4 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **KENT DR** *Starting at:* **AVALON AVE** **$221,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161104	KENT DR	CAMBRIA AVE	DIANE WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85675	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
85676	4.8 to 21.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
85677	24.5 to 29.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
85670	29.6 to 30.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
85678	29.9 to 31.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
85679	35.4 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
85672	38.8 to 39.8 feet	**Vertical Change**	3.47"	5 ft	5	REF		
85680	41.6 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
85673	42.7 to 43.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
85674	46.6 to 47.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
85681	47.8 to 49.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
85682	52.8 to 64.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
85683	68.6 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
85684	72.8 to 76.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
85685	80.0 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
85686	87.1 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
85687	94.8 to 95.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
85688	98.3 to 104.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
85689	106.8 to 107.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85690	110.4 to 120.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
85691	122.2 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
85692	130.2 to 138.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
85693	138.3 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
85694	143.5 to 154.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **CAMBRIA AVE** **$63,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161121	KENT DR	DIANE WAY	KIMMEL AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85823	0.7 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
85824	3.3 to 4.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
85825	4.6 to 7.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
85826	7.9 to 20.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,620**
85827	24.2 to 25.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
85828	28.0 to 33.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
85829	35.3 to 46.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
85830	46.4 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
85831	50.8 to 52.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
85832	52.4 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
85845	56.1 to 73.3 feet	Key Note Segment		5 ft	86			
85807	58.2 to 59.2 feet	**Vertical Change**	3.4"	5 ft	5	REF		
85833	73.3 to 76.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$660**
85808	74.3 to 75.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85809	76.3 to 77.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
85834	77.5 to 86.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	45	SF	$120	**$5,400**
85811	86.4 to 87.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
85835	88.3 to 89.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
85812	90.8 to 91.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
85836	92.1 to 94.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
85837	94.7 to 98.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
85813	95.4 to 96.4 feet	**Vertical Change**	3.44"	5 ft	5	REF		
85838	98.3 to 107.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
85814	98.7 to 99.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
85815	101.2 to 102.2 feet	**Vertical Change**	-.43"	5 ft	5	REF		
85816	104.5 to 110.8 feet	**Vertical Change**	.39"	5 ft	32	REF		
85839	107.9 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
85840	109.3 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161121	KENT DR	DIANE WAY	KIMMEL AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85817	112.7 to 116.0 feet	Vertical Change	-.3"	5 ft	17	REF		
85841	114.3 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
85818	117.0 to 118.0 feet	Vertical Change	.46"	5 ft	5	REF		
85819	120.3 to 132.7 feet	Vertical Change	3.41"	5 ft	62	REF		
85842	121.2 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
85846	124.9 to 146.5 feet	Key Note Segment		5 ft	108			
85820	134.0 to 135.0 feet	Vertical Change	3.15"	5 ft	5	REF		
85821	138.5 to 141.8 feet	Vertical Change	3.18"	5 ft	17	REF		
85822	143.1 to 146.3 feet	Vertical Change	2.75"	5 ft	16	REF		
85843	147.9 to 149.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
85844	149.5 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **DIANE WAY** **$49,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161147	KENT DR	KELSEY LN	AVALON AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86124	1.4 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
86115	11.0 to 12.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
86125	12.9 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
86126	18.2 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
86127	24.3 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
86116	28.6 to 29.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
86117	35.9 to 36.9 feet	**Vertical Change**	-.59"	5 ft	5	SF	$75	**$375**
86128	39.4 to 44.2 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	24	SF	$120	**$2,880**
86129	45.3 to 48.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
86130	48.0 to 54.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
86118	48.6 to 49.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
86131	55.8 to 56.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
86132	58.3 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86133	61.3 to 96.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	176	SF	$120	**$21,060**
86119	73.9 to 74.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
86120	98.1 to 99.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
86134	98.5 to 102.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
86135	103.8 to 106.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
86136	107.4 to 108.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
86137	110.6 to 142.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	158	SF	$120	**$18,900**
86121	112.4 to 113.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
86122	142.8 to 143.8 feet	**Vertical Change**	-.91"	5 ft	5	SF	$75	**$375**
86138	144.1 to 145.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
86123	147.8 to 148.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **KELSEY LN** **$75,525.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161132	KENT DR	KIMMEL AVE	KELSEY LN	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85979	0.9 to 1.9 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
85983	2.8 to 3.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	5	SF	$120	$600
85984	6.8 to 20.3 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	68	SF	$120	$8,100
85980	10.9 to 11.9 feet	Vertical Change	.26"	5 ft	5	REF		
85985	23.8 to 36.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	$7,500
85981	38.3 to 39.3 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
85986	43.8 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,720
85987	51.1 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
85988	56.6 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
85989	64.5 to 69.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,120
85990	70.0 to 74.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	$2,640
85991	76.0 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
85999	78.3 to 93.0 feet	Key Note Segment		5 ft	74			
85982	94.5 to 95.5 feet	Vertical Change	-.48"	5 ft	5	REF		
85992	94.6 to 100.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
85993	102.5 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
85994	107.6 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
85995	112.8 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,500
85996	117.6 to 122.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,640
85997	127.6 to 129.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
85998	131.3 to 149.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	$10,800

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **KIMMEL AVE** **$51,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151603	KENT DR	SUMMER LN	WESTGATE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84396	0.3 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
84397	6.0 to 18.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
84398	22.1 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
84399	31.8 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
84392	39.3 to 40.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
84400	40.1 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
84401	49.8 to 51.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
84402	57.2 to 70.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
84403	70.9 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
84404	74.0 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
84405	78.1 to 85.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
84406	85.8 to 89.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
84407	90.3 to 92.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
84408	95.1 to 110.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
84409	114.3 to 124.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
84410	126.8 to 130.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
84411	132.9 to 156.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
84412	156.5 to 164.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
84393	157.3 to 158.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
84394	161.7 to 162.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
84395	163.6 to 164.6 feet	**Vertical Change**	.68"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **SUMMER LN** **$75,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151552	KENT DR	WESTGATE DR	WINTER WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84198	1.3 to 13.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
84184	1.4 to 2.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
84238	12.6 to 13.6 feet	**Continuous Width**	18"	5 ft	5	SF	$120	**$600**
84232	15.1 to 34.3 feet	Key Note Segment		5 ft	96			
84185	15.4 to 16.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
84186	26.0 to 27.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
84187	37.8 to 38.8 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
84199	39.8 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
84200	45.8 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84201	48.9 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
84202	56.0 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
84203	61.3 to 63.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
84204	63.4 to 64.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84205	70.1 to 73.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
84206	74.3 to 75.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
84207	79.4 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
84208	85.0 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
84188	87.7 to 88.7 feet	**Vertical Change**	.47"	5 ft	5	REF		
84189	93.0 to 94.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
84233	93.3 to 112.8 feet	Key Note Segment		5 ft	98			
84209	113.6 to 118.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
84234	119.0 to 139.8 feet	Key Note Segment		5 ft	104			
84210	141.2 to 142.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
84211	145.1 to 148.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
84212	154.0 to 161.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
84213	164.3 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84214	172.8 to 183.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
84215	184.4 to 192.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151552	KENT DR	WESTGATE DR	WINTER WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84216	193.7 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
84217	196.8 to 199.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
84218	201.6 to 203.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
84235	206.4 to 226.8 feet	Key Note Segment		5 ft	102			
84219	230.0 to 231.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
84220	234.3 to 241.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
84236	242.1 to 261.6 feet	Key Note Segment		5 ft	98			
84190	242.7 to 243.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
84221	262.7 to 312.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	251	SF	$120	**$30,060**
84191	314.9 to 315.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
84222	324.3 to 326.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
84237	328.0 to 347.8 feet	Key Note Segment		5 ft	99			
84192	328.6 to 329.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
84193	338.3 to 339.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
84223	348.9 to 371.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
84224	372.7 to 376.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
84225	376.1 to 393.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
84194	390.1 to 391.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
84226	397.7 to 405.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
84227	405.5 to 410.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
84195	411.0 to 412.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
84228	411.9 to 412.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
84229	413.2 to 417.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
84196	423.9 to 424.9 feet	**Vertical Change**	-.56"	5 ft	5	SF	$75	**$375**
84230	425.1 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
84231	431.3 to 441.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
84197	439.2 to 440.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **KENT DR** *Starting at:* **WESTGATE DR** **$135,045.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151554	KENT DR	WINTER WAY	SUMMER LN	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84243	1.3 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
84244	3.7 to 19.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
84239	23.6 to 24.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
84245	23.7 to 29.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
84246	31.7 to 32.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
84247	33.7 to 34.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
84248	35.9 to 50.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
84240	36.5 to 37.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
84249	52.9 to 57.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
84250	61.1 to 62.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
84251	65.1 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
84241	73.7 to 74.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
84252	79.5 to 80.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
84253	84.8 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
84254	90.4 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
84255	93.9 to 97.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
84256	100.4 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
84257	113.7 to 115.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
84258	121.9 to 125.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
84242	126.7 to 127.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
84259	127.6 to 141.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
84260	141.0 to 148.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
84261	148.6 to 149.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **KENT DR** *Starting at:* **WINTER WAY** **$59,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261452	KENT WAY	HAMPTON DR	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109861	0.0 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109862	11.4 to 19.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
109863	20.4 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
109864	44.6 to 48.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
109865	48.2 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
109866	56.3 to 59.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109846	56.6 to 57.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
109867	62.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
109847	67.2 to 68.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
109868	83.3 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
109869	104.4 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
109848	118.6 to 119.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
109879	120.6 to 149.3 feet	Key Note Segment		5 ft	144			
109850	147.5 to 148.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
109870	153.1 to 186.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	167	SF	$120	**$19,980**
109880	190.1 to 218.8 feet	Key Note Segment		5 ft	144			
109851	207.7 to 208.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
109852	218.6 to 219.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
109871	220.8 to 226.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
109872	228.8 to 258.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,520**
109853	249.3 to 250.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
109881	261.3 to 278.1 feet	Key Note Segment		5 ft	84			
109854	262.1 to 263.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
109873	279.1 to 290.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
109874	291.9 to 303.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
109856	300.0 to 301.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
109875	303.4 to 309.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
109876	310.7 to 325.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261452	KENT WAY	HAMPTON DR	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109882	327.2 to 361.8 feet	Key Note Segment		5 ft	173			
109857	327.5 to 328.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
109858	337.8 to 338.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109877	364.2 to 365.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
109878	368.7 to 387.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
109859	374.8 to 375.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
109860	387.7 to 388.7 feet	**Vertical Change**	.44"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **KENT WAY** *Starting at:* **HAMPTON DR** **$139,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151632	KENT WAY	REN WAY	WINTER WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84839	0.7 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84840	3.3 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
84841	10.8 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
84842	15.8 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
84843	38.3 to 63.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,120**
84834	51.5 to 52.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
84844	66.2 to 73.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
84850	73.4 to 93.0 feet	Key Note Segment		5 ft	98			
84835	77.2 to 78.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
84836	89.7 to 90.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
84845	94.5 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
84846	98.6 to 118.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,120**
84837	117.1 to 118.1 feet	**Vertical Change**	1.56"	5 ft	5	REF		
84847	119.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
84848	136.0 to 140.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
84849	143.2 to 144.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
84838	145.8 to 146.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **KENT WAY** *Starting at:* **REN WAY** **$62,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151634	KENT WAY	WINTER WAY	REN WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84855	7.2 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84872	11.3 to 31.2 feet	Key Note Segment		5 ft	100			
84851	31.4 to 32.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
84856	54.3 to 57.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
84873	59.0 to 76.8 feet	Key Note Segment		5 ft	89			
84852	78.7 to 79.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
84857	78.8 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
84858	82.1 to 101.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
84879	86.4 to 87.4 feet		5.0-6.0%	5 ft	5			
84874	107.8 to 126.4 feet	Key Note Segment		5 ft	93			
84859	127.1 to 132.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,060**
84875	132.9 to 152.7 feet	Key Note Segment		5 ft	99			
84860	153.6 to 156.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
84861	156.1 to 169.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
84862	169.0 to 170.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
84863	172.2 to 181.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
84864	181.8 to 185.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
84876	185.1 to 203.8 feet	Key Note Segment		5 ft	94			
84865	204.6 to 215.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
84866	216.8 to 219.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
84867	220.8 to 224.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
84877	230.3 to 250.8 feet	Key Note Segment		5 ft	103			
84853	246.2 to 247.2 feet	**Vertical Change**	2.34"	5 ft	5	REF		
84854	250.5 to 251.5 feet	**Vertical Change**	.97"	5 ft	5	REF		
84868	251.6 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84878	271.3 to 292.6 feet	Key Note Segment		5 ft	107			
84869	293.5 to 295.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
84870	303.5 to 315.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151634	KENT WAY	WINTER WAY	REN WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84871	315.6 to 320.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
84880	317.7 to 319.3 feet		5.0-6.0%	5 ft	8			
84881	319.3 to 320.5 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: W *side of* **KENT WAY** *Starting at:* **WINTER WAY** **$58,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261505	KENTON WAY	1380 KENTON WAY	HAMPTON DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109898	0.0 to 11.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
109893	12.2 to 13.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109899	12.6 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,820**
109900	39.5 to 87.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	238	SF	$120	**$28,560**
109894	64.0 to 65.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
109911	87.4 to 115.1 feet	Key Note Segment		5 ft	139			
109895	90.5 to 91.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
109896	113.8 to 114.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
109901	117.3 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
109913	117.6 to 118.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
109912	127.5 to 156.3 feet	Key Note Segment		5 ft	144			
109897	156.8 to 157.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
109902	159.4 to 177.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
109903	177.4 to 199.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
109904	200.3 to 202.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
109905	205.3 to 214.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
109906	216.1 to 238.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
109907	238.8 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
109908	242.5 to 271.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
109909	272.0 to 276.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
109910	276.4 to 281.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: W *side of* **KENTON WAY** *Starting at:* **1380 KENTON WAY** **$124,854.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261454	KENTON WAY	FAIRFIELD WAY	1396 KENTON WAY	19

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109888	10.7 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
109889	15.5 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
109892	40.9 to 69.4 feet	Key Note Segment		5 ft	143			
109883	42.3 to 43.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
109884	44.6 to 45.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
109885	51.7 to 52.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
109886	70.1 to 71.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
109890	73.8 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109887	76.8 to 77.8 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
109891	78.4 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **KENTON WAY** *Starting at:* **FAIRFIELD WAY** **$6,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091018	KERN ST	1508 KERN ST	WRENWOOD WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128521	4.3 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	161	SF	$120	**$19,296**
128515	4.8 to 5.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
128522	47.1 to 60.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,240**
128516	51.5 to 52.5 feet	**Vertical Change**	-.45"	4 ft	4	REF		
128524	60.1 to 74.1 feet	Key Note Segment		4 ft	56			
128523	85.6 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
128525	87.4 to 101.8 feet	Key Note Segment		4 ft	58			
128517	109.4 to 110.4 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
128518	119.0 to 120.0 feet	**Vertical Change**	.73"	4 ft	4	SF	$75	**$300**
128519	127.9 to 128.9 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: W *side of* **KERN ST** *Starting at:* **1508 KERN ST** **$27,012.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091003	KERN ST	WRENWOOD WAY	ROBINWOOD WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128401	0.9 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
128402	11.7 to 16.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**
128403	16.6 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
128404	24.8 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	114	SF	$120	**$13,680**
128405	56.3 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	**$9,264**
128398	76.1 to 77.1 feet	**Vertical Change**	-.84"	4 ft	4	SF	$75	**$300**
128406	78.2 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	**$8,640**
128407	98.5 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	125	SF	$120	**$15,024**
128399	108.2 to 109.2 feet	**Vertical Change**	2.57"	4 ft	4	REF		
128400	127.5 to 128.5 feet	**Vertical Change**	.65"	4 ft	4	REF		
128408	140.1 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**

TOTAL COST FOR: E *side of* **KERN ST** *Starting at:* **WRENWOOD WAY** **$56,412.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281107	KIMBERLEY LN	ALEXIS WAY	LYNMARIE WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112346	2.5 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
112343	20.3 to 21.3 feet	**Vertical Change**	-.59"	5 ft	5	REF		
112344	28.9 to 29.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112347	37.9 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
112348	57.8 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
112349	84.7 to 102.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,860**
112350	103.8 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	329	SF	$120	**$39,420**
112345	105.6 to 106.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **KIMBERLEY LN** *Starting at:* **ALEXIS WAY** **$94,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281046	KIMBERLEY LN	LYNMARIE WAY	TEVIN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112155	1.8 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
112129	14.8 to 15.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
112186	16.7 to 33.6 feet	Key Note Segment		5 ft	85			
112130	37.9 to 38.9 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
112156	42.6 to 64.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
112131	47.1 to 48.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
112132	63.0 to 64.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
112187	64.6 to 84.8 feet	Key Note Segment		5 ft	101			
112133	84.6 to 85.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
112157	86.0 to 96.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
112134	93.5 to 94.5 feet	**Vertical Change**	3.32"	5 ft	5	REF		
112158	100.3 to 101.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
112159	102.1 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
112135	108.5 to 109.5 feet	**Vertical Change**	.54"	5 ft	5	REF		
112188	118.3 to 137.4 feet	Key Note Segment		5 ft	96			
112136	119.2 to 120.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
112137	139.2 to 140.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
112160	139.8 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
112189	145.7 to 164.7 feet	Key Note Segment		5 ft	95			
112138	165.2 to 166.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112161	166.1 to 171.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
112162	171.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
112163	176.2 to 187.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
112164	187.8 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
112165	206.9 to 222.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
112139	221.7 to 222.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
112190	222.5 to 242.0 feet	Key Note Segment		5 ft	98			
112166	244.4 to 249.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281046	KIMBERLEY LN	LYNMARIE WAY	TEVIN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112191	249.3 to 267.3 feet	Key Note Segment		5 ft	90			
112140	258.4 to 259.4 feet	Vertical Change	-.26"	5 ft	5	REF		
112167	268.3 to 274.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	$3,600
112141	269.2 to 270.2 feet	Vertical Change	.51"	5 ft	5	REF		
112168	274.8 to 293.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	$11,100
112169	294.8 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
112170	303.4 to 310.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
112171	313.8 to 318.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
112142	318.3 to 319.3 feet	Vertical Change	.32"	5 ft	5	REF		
112172	318.3 to 323.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
112192	325.8 to 345.2 feet	Key Note Segment		5 ft	97			
112173	347.0 to 349.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
112174	349.3 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
112175	350.9 to 351.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
112193	352.2 to 371.4 feet	Key Note Segment		5 ft	96			
112176	372.6 to 401.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	$17,100
112143	381.7 to 382.7 feet	Vertical Change	.3"	5 ft	5	REF		
112144	390.4 to 391.4 feet	Vertical Change	.4"	5 ft	5	REF		
112177	403.4 to 413.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,880
112145	407.6 to 408.6 feet	Vertical Change	.33"	5 ft	5	REF		
112178	413.2 to 419.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
112146	416.2 to 417.2 feet	Vertical Change	.28"	5 ft	5	REF		
112194	421.6 to 448.6 feet	Key Note Segment		5 ft	135			
112148	432.2 to 433.2 feet	Vertical Change	.27"	5 ft	5	REF		
112149	450.0 to 451.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
112179	453.4 to 454.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
112195	454.9 to 473.6 feet	Key Note Segment		5 ft	94			
112180	475.5 to 477.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281046	KIMBERLEY LN	LYNMARIE WAY	TEVIN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112150	476.0 to 477.0 feet	Vertical Change	-.57"	5 ft	5	REF		
112181	480.4 to 489.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
112151	486.8 to 487.8 feet	Vertical Change	.42"	5 ft	5	REF		
112182	489.8 to 509.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
112183	509.0 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
112152	509.9 to 510.9 feet	Vertical Change	.29"	5 ft	5	REF		
112184	512.9 to 522.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
112153	517.3 to 518.3 feet	Vertical Change	.27"	5 ft	5	REF		
112196	526.7 to 547.3 feet	Key Note Segment		5 ft	103			
112154	537.0 to 538.0 feet	Vertical Change	.31"	5 ft	5	REF		
112185	548.3 to 549.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **KIMBERLEY LN** *Starting at:* **LYNMARIE WAY** **$157,305.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281054	KIMBERLEY LN	TEVIN WAY	ALEXIS WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112265	0.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	391	SF	$120	**$46,860**
112258	82.1 to 83.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
112266	84.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
112271	88.3 to 89.3 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
112259	89.2 to 90.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
112260	97.9 to 98.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
112267	105.8 to 112.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
112261	106.5 to 107.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
112262	115.8 to 116.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
112268	116.9 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
112269	124.3 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
112263	149.8 to 150.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
112270	165.2 to 169.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
112264	166.9 to 167.9 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **KIMBERLEY LN** *Starting at:* **TEVIN WAY** **$95,649.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150832	KIMBERLY DR	DEBORAH LN	TAYLOR LANE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66638	0.0 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,380**
66635	1.1 to 2.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
66639	3.8 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
66640	5.1 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
66641	18.3 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
66642	33.6 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
66643	38.9 to 46.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
66644	46.5 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66645	78.8 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
66636	84.5 to 85.5 feet	**Vertical Change**	.61"	5 ft	5	REF		
66646	94.3 to 101.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
66637	103.6 to 104.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
66647	104.1 to 106.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
66648	107.5 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**

TOTAL COST FOR: N *side of* **KIMBERLY DR** *Starting at:* **DEBORAH LN** **$49,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150953	KIMBERLY DR	STEVEN LANE	TAYLOR LANE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67519	1.3 to 2.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
67520	4.1 to 5.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
67521	5.7 to 8.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
67522	11.1 to 14.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
67563	15.3 to 42.3 feet	Key Note Segment		5 ft	135			
67503	16.5 to 17.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
67504	36.6 to 37.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
67523	42.3 to 43.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
67524	48.6 to 49.8 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	6	SF	$120	**$720**
67564	49.8 to 59.1 feet	Key Note Segment		5 ft	47			
67505	54.5 to 55.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
67525	59.3 to 60.4 feet	**Cross Slope (Driveway)**	9.0-10.0%	5 ft	6	SF	$40	**$220**
67526	62.5 to 72.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
67527	74.3 to 88.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
67565	88.3 to 108.7 feet	Key Note Segment		5 ft	102			
67528	111.2 to 133.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,500**
67507	134.2 to 135.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
67529	135.3 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
67566	137.4 to 159.7 feet	Key Note Segment		5 ft	111			
67508	149.0 to 150.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
67530	160.7 to 161.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67531	168.1 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
67532	174.7 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67567	183.9 to 203.4 feet	Key Note Segment		5 ft	98			
67509	187.3 to 188.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
67510	194.4 to 195.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
67511	204.1 to 205.1 feet	**Vertical Change**	-.59"	5 ft	5	REF		
67533	204.6 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150953	KIMBERLY DR	STEVEN LANE	TAYLOR LANE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67534	218.9 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
67512	222.8 to 223.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
67568	230.6 to 257.3 feet	Key Note Segment		5 ft	134			
67535	258.2 to 263.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
67536	263.8 to 279.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
67569	279.3 to 305.8 feet	Key Note Segment		5 ft	133			
67537	312.3 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
67513	313.3 to 314.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
67514	326.8 to 327.8 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
67570	326.8 to 346.2 feet	Key Note Segment		5 ft	97			
67538	347.8 to 359.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
67539	364.5 to 367.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
67540	368.8 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
67571	373.3 to 392.8 feet	Key Note Segment		5 ft	98			
67541	403.0 to 416.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
67542	417.0 to 423.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
67543	427.8 to 433.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
67515	431.2 to 432.2 feet	**Vertical Change**	3.1"	5 ft	5	REF		
67544	436.6 to 438.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
67545	438.3 to 450.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
67572	461.6 to 479.9 feet	Key Note Segment		5 ft	92			
67516	464.1 to 465.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
67517	470.6 to 471.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
67518	477.5 to 478.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
67573	496.8 to 515.7 feet	Key Note Segment		5 ft	95			
67546	532.8 to 536.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
67547	549.1 to 554.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
67548	554.9 to 558.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150953	KIMBERLY DR	STEVEN LANE	TAYLOR LANE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67549	562.8 to 569.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
67550	570.3 to 575.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
67551	576.1 to 586.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
67574	588.0 to 605.3 feet	Key Note Segment		5 ft	86			
67552	605.9 to 607.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
67553	607.0 to 609.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
67554	611.3 to 613.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
67555	614.3 to 616.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67556	618.2 to 623.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
67557	624.0 to 628.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
67558	629.7 to 630.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
67559	631.8 to 656.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
67560	656.4 to 667.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
67561	670.8 to 692.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**
67562	693.7 to 704.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
67575	703.5 to 704.5 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **KIMBERLY DR** *Starting at:* **STEVEN LANE** **$172,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150948	KIMBERLY DR	TAYLOR LANE	STEVEN LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67451	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
67452	3.5 to 14.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
67453	17.0 to 42.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,420**
67454	43.9 to 57.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
67455	58.2 to 69.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
67456	72.2 to 73.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
67493	74.3 to 102.8 feet	Key Note Segment		5 ft	143			
67442	76.5 to 77.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
67457	103.2 to 104.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
67458	113.1 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
67459	138.8 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**
67494	149.3 to 170.3 feet	Key Note Segment		5 ft	105			
67460	175.0 to 182.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
67461	183.7 to 189.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
67462	192.3 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
67463	198.4 to 210.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
67495	211.0 to 228.3 feet	Key Note Segment		5 ft	87			
67464	229.5 to 242.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
67465	242.7 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
67466	254.9 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
67443	256.2 to 257.2 feet	**Vertical Change**	2.17"	5 ft	5	REF		
67467	260.8 to 264.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
67468	264.7 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
67469	272.3 to 276.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
67496	276.2 to 296.1 feet	Key Note Segment		5 ft	100			
67444	293.8 to 294.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
67470	298.7 to 307.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
67471	310.3 to 314.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150948	KIMBERLY DR	TAYLOR LANE	STEVEN LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67472	314.3 to 318.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
67473	318.3 to 330.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
67474	330.8 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
67497	335.7 to 357.3 feet	Key Note Segment		5 ft	108			
67475	365.4 to 370.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
67476	370.8 to 374.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
67477	374.9 to 392.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
67445	387.8 to 388.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
67498	392.1 to 420.7 feet	Key Note Segment		5 ft	143			
67478	422.3 to 440.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
67479	440.5 to 442.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67480	445.0 to 446.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
67481	446.2 to 461.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
67499	461.8 to 481.1 feet	Key Note Segment		5 ft	97			
67446	461.9 to 462.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
67447	464.3 to 465.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
67482	483.9 to 485.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
67483	487.6 to 489.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
67448	495.1 to 496.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
67484	495.6 to 502.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
67485	502.7 to 503.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
67486	506.4 to 511.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
67500	512.7 to 540.1 feet	Key Note Segment		5 ft	137			
67487	546.4 to 548.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67488	550.6 to 565.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
67489	567.3 to 580.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
67501	581.0 to 599.4 feet	Key Note Segment		5 ft	92			
67449	591.8 to 592.8 feet	**Vertical Change**	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150948	KIMBERLY DR	TAYLOR LANE	STEVEN LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67502	607.6 to 625.3 feet	Key Note Segment		5 ft	88			
67450	610.7 to 611.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
67490	634.1 to 643.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
67491	646.5 to 650.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
67492	651.4 to 654.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **KIMBERLY DR** *Starting at:* **TAYLOR LANE** **$197,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151003	KIMBERLY DR	TAYLOR LANE	DEBORAH LN	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67680	7.3 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
67681	22.7 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
67682	38.4 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
67683	46.3 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
67684	50.0 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
67685	57.8 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
67686	71.4 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
67687	78.6 to 95.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
67688	98.1 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
67689	107.1 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
67690	130.1 to 132.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
67679	130.3 to 131.3 feet	**Vertical Change**	.59"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **KIMBERLY DR** *Starting at:* **TAYLOR LANE** **$53,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161126	KIMMEL AVE	3330 KIMMEL AVE	ZAK WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85907	0.1 to 19.5 feet	Key Note Segment		5 ft	97			
85905	20.9 to 24.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
85906	31.1 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
85904	31.7 to 32.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
85908	37.8 to 38.9 feet		5.0-6.0%	5 ft	6			
85909	38.9 to 40.3 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: S *side of* **KIMMEL AVE** *Starting at:* **3330 KIMMEL AVE** **$7,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161125	KIMMEL AVE	KENT DR	3342 KIMMEL AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85862	1.3 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
85847	8.5 to 9.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
85863	11.6 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
85864	15.6 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85848	16.1 to 17.1 feet	**Vertical Change**	2.56"	5 ft	5	REF		
85865	19.3 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85849	25.0 to 26.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
85866	28.9 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
85867	39.1 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
85896	51.8 to 72.9 feet	Key Note Segment		5 ft	106			
85850	59.3 to 60.3 feet	**Vertical Change**	3.51"	5 ft	5	REF		
85868	74.4 to 84.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
85869	90.7 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85870	93.2 to 98.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
85897	100.8 to 122.4 feet	Key Note Segment		5 ft	108			
85851	117.9 to 118.9 feet	**Vertical Change**	3.49"	5 ft	5	REF		
85871	131.8 to 134.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
85872	137.3 to 146.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
85898	153.4 to 174.2 feet	Key Note Segment		5 ft	104			
85852	163.4 to 164.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
85873	176.3 to 180.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
85874	182.9 to 187.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
85853	190.2 to 191.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
85875	190.8 to 191.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85876	194.3 to 206.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
85899	209.7 to 229.5 feet	Key Note Segment		5 ft	99			
85854	209.9 to 210.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
85855	227.7 to 228.7 feet	**Vertical Change**	.43"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161125	KIMMEL AVE	KENT DR	3342 KIMMEL AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85877	231.3 to 237.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
85878	240.8 to 248.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
85879	251.2 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85880	252.8 to 256.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
85881	256.8 to 259.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
85900	262.2 to 283.5 feet	Key Note Segment		5 ft	107			
85882	287.2 to 296.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
85883	297.3 to 303.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,660**
85884	304.4 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
85856	311.6 to 312.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
85885	312.2 to 319.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
85886	323.8 to 339.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
85857	327.3 to 328.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
85901	339.0 to 361.3 feet	Key Note Segment		5 ft	112			
85887	364.9 to 377.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
85858	365.5 to 366.5 feet	**Vertical Change**	.57"	5 ft	5	REF		
85888	380.3 to 381.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85902	381.4 to 412.7 feet	Key Note Segment		5 ft	157			
85889	415.4 to 417.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
85890	421.7 to 422.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
85891	423.4 to 424.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85892	427.3 to 430.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
85893	430.6 to 431.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
85859	431.4 to 432.4 feet	**Vertical Change**	2.44"	5 ft	5	REF		
85860	435.7 to 436.7 feet	**Vertical Change**	3.47"	5 ft	5	REF		
85894	436.4 to 442.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
85895	444.6 to 448.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
85861	449.7 to 450.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161125	KIMMEL AVE	KENT DR	3342 KIMMEL AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85903	449.8 to 469.5 feet	Key Note Segment		5 ft	99			

TOTAL COST FOR: S *side of* **KIMMEL AVE** *Starting at:* **KENT DR** **$103,905.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161031	KIMMEL AVE	WESTBERRY BVD	ZAK WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85271	0.0 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
85272	4.2 to 9.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
85273	11.6 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85274	13.1 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
85275	25.2 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
85276	39.3 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
85277	51.1 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
85278	57.1 to 58.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
85279	61.2 to 70.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,340**
85270	70.4 to 71.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **KIMMEL AVE** *Starting at:* **WESTBERRY BVD** **$34,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161130	KIMMEL AVE	ZAK WAY	KENT DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85923	2.6 to 6.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
85910	9.4 to 10.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
85924	9.6 to 19.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
85970	20.1 to 40.5 feet	Key Note Segment		5 ft	102			
85911	43.3 to 44.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
85925	45.0 to 46.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
85971	47.0 to 66.8 feet	Key Note Segment		5 ft	99			
85912	50.1 to 51.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
85926	67.5 to 69.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
85927	69.8 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
85913	79.9 to 80.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
85928	80.2 to 84.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
85929	85.3 to 87.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85930	91.7 to 99.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
85931	100.8 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
85932	107.8 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
85933	111.3 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
85914	111.9 to 112.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
85934	120.0 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
85972	125.8 to 146.1 feet	Key Note Segment		5 ft	102			
85915	126.8 to 127.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
85916	129.6 to 130.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
85935	146.4 to 149.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	13	SF	$40	**$520**
85917	150.7 to 151.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
85936	150.8 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
85937	154.8 to 156.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
85938	157.9 to 160.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
85939	161.8 to 164.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161130	KIMMEL AVE	ZAK WAY	KENT DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85940	171.3 to 172.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
85941	174.8 to 176.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
85942	177.6 to 179.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
85973	180.3 to 201.3 feet	Key Note Segment		5 ft	105			
85918	191.2 to 192.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85919	198.8 to 199.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
85943	202.0 to 208.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
85974	210.1 to 231.0 feet	Key Note Segment		5 ft	105			
85944	231.7 to 241.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
85945	242.4 to 246.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
85946	247.4 to 256.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
85947	256.8 to 258.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
85975	260.9 to 284.1 feet	Key Note Segment		5 ft	116			
85948	284.3 to 290.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	32	SF	$40	**$1,280**
85949	290.7 to 294.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
85950	294.9 to 296.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
85951	296.3 to 297.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
85952	299.3 to 304.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
85953	307.2 to 308.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85954	310.2 to 318.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
85976	319.3 to 338.8 feet	Key Note Segment		5 ft	98			
85920	319.9 to 323.5 feet	**Vertical Change**	.48"	5 ft	18	REF		
85955	339.1 to 340.1 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	5	SF	$40	**$200**
85956	341.9 to 350.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,340**
85921	343.6 to 344.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
85957	353.2 to 364.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
85958	367.8 to 370.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
85977	371.6 to 392.8 feet	Key Note Segment		5 ft	106			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161130	KIMMEL AVE	ZAK WAY	KENT DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85959	394.1 to 396.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
85960	399.3 to 418.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,400**
85961	418.3 to 419.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85962	421.7 to 424.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
85978	426.4 to 447.2 feet	Key Note Segment		5 ft	104			
85963	449.0 to 462.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	67	SF	$120	**$7,980**
85964	466.3 to 469.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
85965	470.7 to 478.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
85966	479.0 to 480.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
85967	484.0 to 504.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,360**
85968	506.8 to 510.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
85969	515.3 to 518.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
85922	517.7 to 518.7 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **KIMMEL AVE** *Starting at:* **ZAK WAY** **$138,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161209	KIMMEL AVE	ZAK WAY	WESTBERRY BVD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86320	0.4 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
86321	2.2 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
86322	7.7 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
86323	34.5 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
86324	48.8 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
86325	58.6 to 62.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
86319	63.8 to 66.7 feet	**Vertical Change**	.4"	5 ft	15	LF	$75	**$1,088**
86326	65.0 to 68.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
86327	68.6 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **KIMMEL AVE** *Starting at:* **ZAK WAY** **$27,067.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191520	KIWI ST	711 KIWI ST	MADARIN ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74867	0.3 to 2.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,242**
74868	2.6 to 5.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,728**
74869	8.3 to 16.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	36	SF	$120	**$4,320**
74870	28.4 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
74871	32.5 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,288**
74875	49.7 to 71.5 feet	Key Note Segment		5 ft	98			
74872	72.8 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
74876	77.3 to 98.1 feet	Key Note Segment		5 ft	94			
74873	98.7 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
74874	108.5 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,052**

TOTAL COST FOR: E *side of* **KIWI ST** *Starting at:* **711 KIWI ST** **$22,356.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191518	KIWI ST	E ALMOND AVE	731 KIWI ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74857	0.0 to 7.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
74851	0.1 to 1.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
74852	3.4 to 4.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
74853	7.0 to 8.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
74862	7.0 to 29.5 feet	Key Note Segment		5 ft	101			
74854	18.1 to 19.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
74863	33.8 to 55.8 feet	Key Note Segment		5 ft	99			
74858	57.0 to 84.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,688**
74864	85.4 to 108.0 feet	Key Note Segment		5 ft	102			
74855	107.9 to 108.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
74865	111.4 to 133.0 feet	Key Note Segment		5 ft	97			
74856	133.6 to 134.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$338**
74859	138.7 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,348**
74860	153.3 to 157.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
74861	160.5 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
74866	163.5 to 185.1 feet	Key Note Segment		5 ft	97			

TOTAL COST FOR: E *side of* **KIWI ST** *Starting at:* **E ALMOND AVE** **$26,257.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181450	KIWI ST	E ALMOND AVE	PEAR ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72123	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
72142	6.8 to 28.3 feet	Key Note Segment		5 ft	97			
72115	7.1 to 8.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
72124	28.9 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72143	32.3 to 54.7 feet	Key Note Segment		5 ft	101			
72125	55.3 to 81.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	117	SF	$40	**$4,680**
72144	83.8 to 106.5 feet	Key Note Segment		5 ft	102			
72116	84.8 to 85.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
72126	106.7 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
72145	110.1 to 132.8 feet	Key Note Segment		5 ft	102			
72127	136.5 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72128	144.4 to 150.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,186**
72129	150.3 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
72130	159.1 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
72146	161.5 to 184.1 feet	Key Note Segment		5 ft	102			
72117	173.1 to 174.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
72131	185.9 to 187.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$648**
72147	187.5 to 209.7 feet	Key Note Segment		5 ft	100			
72118	199.0 to 200.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
72119	209.5 to 210.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
72132	212.0 to 215.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,890**
72133	217.5 to 222.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,862**
72134	226.3 to 232.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,132**
72135	234.1 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
72148	238.8 to 261.9 feet	Key Note Segment		5 ft	104			
72120	261.5 to 262.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
72136	261.9 to 263.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$198**
72137	263.4 to 265.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181450	KIWI ST	E ALMOND AVE	PEAR ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72149	265.3 to 287.0 feet	Key Note Segment		5 ft	98			
72138	287.8 to 299.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,048**
72139	301.3 to 303.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,188**
72150	304.2 to 326.8 feet	Key Note Segment		5 ft	102			
72121	325.9 to 326.9 feet	**Vertical Change**	-.44"	5 ft	5	REF		
72140	338.3 to 340.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72141	347.3 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72122	350.9 to 351.9 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$338**

TOTAL COST FOR: W *side of* **KIWI ST** *Starting at:* **E ALMOND AVE** **$40,423.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110181446	KIWI ST	GRAPE ST	E ALMOND AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72099	0.3 to 18.8 feet	Key Note Segment		5 ft	83			
72071	28.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72061	32.6 to 33.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$338**
72072	36.3 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
72100	44.2 to 65.7 feet	Key Note Segment		5 ft	97			
72073	67.1 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
72101	69.5 to 92.0 feet	Key Note Segment		5 ft	101			
72074	92.1 to 101.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	40	SF	$40	**$1,602**
72075	101.2 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
72076	114.3 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,778**
72102	125.8 to 147.8 feet	Key Note Segment		5 ft	99			
72077	148.9 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
72103	152.4 to 174.0 feet	Key Note Segment		5 ft	97			
72062	163.1 to 164.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
72078	175.1 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,318**
72063	183.9 to 184.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
72079	189.4 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
72064	193.6 to 196.8 feet	**Vertical Change**	.31"	5 ft	14	REF		
72080	203.3 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
72104	207.3 to 229.8 feet	Key Note Segment		5 ft	101			
72081	230.1 to 232.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$378**
72105	233.9 to 256.3 feet	Key Note Segment		5 ft	101			
72065	234.9 to 235.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
72082	257.7 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
72083	261.6 to 271.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,508**
72084	271.8 to 273.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
72106	277.3 to 298.8 feet	Key Note Segment		5 ft	97			
72085	301.4 to 315.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,668**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110181446	KIWI ST	GRAPE ST	E ALMOND AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72107	319.3 to 342.2 feet	Key Note Segment		5 ft	103			
72066	341.8 to 342.8 feet	Vertical Change	-.29"	5 ft	5	REF		
72086	344.8 to 351.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
72067	351.0 to 352.0 feet	Vertical Change	.34"	5 ft	5	REF		
72087	351.8 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
72108	358.8 to 381.1 feet	Key Note Segment		5 ft	100			
72088	385.1 to 397.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,804**
72089	398.0 to 402.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,322**
72109	402.3 to 423.6 feet	Key Note Segment		5 ft	96			
72068	403.1 to 404.1 feet	Vertical Change	.28"	5 ft	5	REF		
72069	413.2 to 414.2 feet	Vertical Change	.4"	5 ft	5	REF		
72090	425.6 to 440.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,776**
72091	442.8 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
72110	453.3 to 474.8 feet	Key Note Segment		5 ft	97			
72092	475.5 to 479.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
72111	479.8 to 502.0 feet	Key Note Segment		5 ft	100			
72093	502.8 to 505.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,188**
72094	506.2 to 519.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,344**
72095	524.0 to 527.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,890**
72112	530.7 to 552.4 feet	Key Note Segment		5 ft	98			
72096	554.3 to 556.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72113	556.8 to 578.8 feet	Key Note Segment		5 ft	99			
72097	578.9 to 582.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	14	SF	$40	**$558**
72098	584.6 to 589.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,808**

TOTAL COST FOR: E *side of* **KIWI ST** *Starting at:* **GRAPE ST** **$93,757.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191514	KIWI ST	MADARIN ST	E ALMOND AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74837	0.1 to 2.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,134**
74838	2.2 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
74839	4.8 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74840	9.9 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
74845	17.1 to 39.0 feet	Key Note Segment		5 ft	99			
74832	39.2 to 40.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
74846	42.8 to 64.8 feet	Key Note Segment		5 ft	99			
74841	78.5 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
74842	96.7 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
74847	103.8 to 124.8 feet	Key Note Segment		5 ft	95			
74833	104.2 to 105.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
74848	129.9 to 151.3 feet	Key Note Segment		5 ft	96			
74849	189.5 to 210.5 feet	Key Note Segment		5 ft	95			
74834	200.7 to 201.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
74835	210.8 to 211.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$338**
74843	213.5 to 215.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
74850	215.5 to 237.1 feet	Key Note Segment		5 ft	97			
74836	237.0 to 238.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74844	239.0 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,912**

TOTAL COST FOR: W *side of* **KIWI ST** *Starting at:* **MADARIN ST** **$16,321.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181509	KIWI ST	PEAR ST	GRAPE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72275	4.8 to 6.2 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	**$756**
72276	11.3 to 17.9 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	30	SF	$120	**$3,564**
72277	19.6 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
72278	21.0 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
72285	24.3 to 45.9 feet	Key Note Segment		5 ft	97			
72279	46.2 to 47.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$234**
72280	49.6 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,888**
72272	53.1 to 54.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
72281	59.7 to 74.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,154**
72286	75.2 to 97.3 feet	Key Note Segment		5 ft	99			
72273	97.3 to 98.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
72282	97.5 to 103.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,348**
72283	105.1 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**
72274	106.5 to 107.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
72284	118.9 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,132**

TOTAL COST FOR: W *side of* **KIWI ST** *Starting at:* **PEAR ST** **$31,068.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111300	KNOX AVE	377 KNOX AVE	LILLY ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59497	0.0 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,200**
59498	19.2 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	160	SF	$120	**$19,200**
59491	35.4 to 36.4 feet	**Vertical Change**	.45"	4 ft	4	REF		
59492	61.1 to 62.1 feet	**Vertical Change**	-.27"	4 ft	4	REF		
59499	61.7 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	62	SF	$120	**$7,488**
59500	79.5 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$672**
59501	80.9 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,608**
59502	93.5 to 97.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,872**
59503	99.3 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,960**
59493	112.5 to 113.5 feet	**Vertical Change**	.3"	4 ft	4	REF		
59494	116.0 to 117.0 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
59504	120.8 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
59505	123.4 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	115	SF	$120	**$13,824**
59506	154.5 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
59507	158.4 to 159.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
59508	166.8 to 172.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
59509	179.6 to 181.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
59495	182.7 to 183.7 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
59510	186.4 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
59511	197.1 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**
59496	208.3 to 209.3 feet	**Vertical Change**	.28"	4 ft	4	REF		
59512	211.7 to 227.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	**$7,728**
59513	229.9 to 231.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
59514	231.7 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
59515	248.3 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	82	SF	$120	**$9,840**
59516	271.0 to 272.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$864**
59517	272.8 to 273.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$480**
59518	275.3 to 280.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111300	KNOX AVE	377 KNOX AVE	LILLY ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59519	281.3 to 299.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	72	SF	$120	**$8,592**

TOTAL COST FOR: E *side of* **KNOX AVE** *Starting at:* **377 KNOX AVE** **$108,936.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111257	KNOX AVE	A ST	301 KNOX AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59475	0.0 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	17	SF	$120	**$2,016**
59476	8.1 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,528**
59477	42.7 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	9	SF	$120	**$1,092**
59471	56.0 to 57.0 feet	**Vertical Change**	.29"	7 ft	7	LF	$75	**$525**
59478	83.3 to 90.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	47	SF	$120	**$5,628**
59472	90.4 to 91.4 feet	**Vertical Change**	-.31"	7 ft	7	LF	$75	**$525**
59479	95.7 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	77	SF	$120	**$9,240**
59480	112.1 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	15	SF	$120	**$1,764**
59481	117.4 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,276**
59482	128.4 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	57	SF	$120	**$6,888**
59490	137.0 to 151.7 feet	Key Note Segment		7 ft	103			
59473	137.9 to 138.9 feet	**Vertical Change**	.32"	7 ft	7	REF		
59474	150.7 to 151.7 feet	**Vertical Change**	-.27"	7 ft	7	REF		
59483	152.1 to 154.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	7 ft	15	SF	$40	**$616**
59484	172.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	7	SF	$120	**$840**
59485	185.7 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,444**
59486	197.5 to 199.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,260**
59487	201.8 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	46	SF	$120	**$5,460**
59488	213.1 to 218.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	41	SF	$120	**$4,872**
59489	242.8 to 248.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: E *side of* **KNOX AVE** *Starting at:* **A ST** **$56,014.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111023	KNOX AVE	CARRY AVE	SUNRISE AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58045	0.3 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,920**
58046	24.1 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	98	SF	$120	**$11,808**
58047	52.0 to 72.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	**$9,648**
58048	72.8 to 86.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	54	SF	$120	**$6,480**
58049	86.6 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
58050	105.6 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,400**
58051	126.4 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
58052	130.3 to 134.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
58053	134.4 to 158.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	95	SF	$120	**$11,424**

TOTAL COST FOR: E *side of* **KNOX AVE** *Starting at:* **CARRY AVE** **$60,192.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111021	KNOX AVE	LILLY ST	CARRY AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58035	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
58036	13.7 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
58037	18.3 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
58038	28.2 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
58033	51.5 to 52.5 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**
58039	62.6 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
58040	79.4 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	79	SF	$120	**$9,504**
58041	101.3 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
58042	107.4 to 123.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	63	SF	$120	**$7,584**
58034	109.2 to 110.2 feet	**Vertical Change**	.66"	4 ft	4	REF		
58043	123.3 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,536**
58044	145.6 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: E *side of* **KNOX AVE** *Starting at:* **LILLY ST** **$36,252.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111032	KNOX AVE	SUNRISE AVE	A ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58080	3.1 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58142	38.0 to 50.7 feet	Key Note Segment		5 ft	64			
58081	50.7 to 52.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
58082	56.5 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
58083	62.8 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
58084	73.8 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
58085	84.9 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58054	85.8 to 86.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
58143	86.3 to 104.2 feet	Key Note Segment		5 ft	90			
58086	104.2 to 106.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
58087	106.4 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
58088	129.3 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
58055	135.1 to 136.1 feet	**Vertical Change**	-.45"	5 ft	5	REF		
58089	135.8 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
58144	146.9 to 161.8 feet	Key Note Segment		5 ft	75			
58090	162.2 to 179.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	88	SF	$40	**$3,520**
58056	177.6 to 178.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
58145	179.8 to 193.3 feet	Key Note Segment		5 ft	68			
58057	193.2 to 194.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
58091	205.3 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
58059	213.1 to 218.8 feet	**Vertical Change**	.27"	5 ft	29	LF	$75	**$2,138**
58092	214.2 to 220.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
58060	222.1 to 223.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
58146	222.2 to 232.0 feet	Key Note Segment		5 ft	49			
58093	232.0 to 248.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	84	SF	$40	**$3,360**
58094	250.9 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
58095	257.9 to 267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
58096	269.8 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111032	KNOX AVE	SUNRISE AVE	A ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58147	284.5 to 298.3 feet	Key Note Segment		5 ft	69			
58097	298.3 to 304.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	33	SF	$40	$1,300
58098	305.8 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	$12,000
58099	329.4 to 338.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,640
58148	338.8 to 353.7 feet	Key Note Segment		5 ft	75			
58062	370.7 to 371.7 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
58100	376.3 to 377.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
58149	390.1 to 404.3 feet	Key Note Segment		5 ft	71			
58101	411.1 to 446.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	$21,300
58150	446.6 to 461.3 feet	Key Note Segment		5 ft	74			
58063	462.4 to 463.4 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
58102	467.6 to 473.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,780
58151	473.9 to 489.8 feet	Key Note Segment		5 ft	80			
58064	474.9 to 475.9 feet	Vertical Change	.31"	5 ft	5	REF		
58103	494.5 to 518.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	$14,580
58065	505.5 to 506.5 feet	Vertical Change	1.13"	5 ft	5	REF		
58152	518.8 to 535.7 feet	Key Note Segment		5 ft	85			
58066	519.6 to 520.6 feet	Vertical Change	.39"	5 ft	5	REF		
58104	539.5 to 560.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,420
58067	556.9 to 557.9 feet	Vertical Change	-.39"	5 ft	5	REF		
58068	559.0 to 560.0 feet	Vertical Change	.37"	5 ft	5	REF		
58105	561.4 to 565.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
58153	566.8 to 578.8 feet	Key Note Segment		5 ft	60			
58106	578.9 to 582.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	19	SF	$40	$760
58107	582.7 to 590.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,620
58154	590.4 to 607.7 feet	Key Note Segment		5 ft	87			
58069	591.2 to 592.2 feet	Vertical Change	.35"	5 ft	5	REF		
58108	611.7 to 613.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111032	KNOX AVE	SUNRISE AVE	A ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58109	617.9 to 619.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
58110	621.6 to 627.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
58111	633.3 to 635.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
58155	636.5 to 654.8 feet	Key Note Segment		5 ft	91			
58071	654.6 to 655.6 feet	**Vertical Change**	.67"	5 ft	5	REF		
58112	654.8 to 656.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
58113	656.8 to 661.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
58114	662.0 to 665.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
58115	666.8 to 678.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
58156	679.0 to 693.8 feet	Key Note Segment		5 ft	74			
58072	679.7 to 680.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
58073	695.0 to 696.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
58116	698.5 to 709.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
58117	711.2 to 721.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
58118	731.3 to 747.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
58157	747.6 to 760.5 feet	Key Note Segment		5 ft	65			
58074	750.1 to 751.1 feet	**Vertical Change**	.59"	5 ft	5	REF		
58119	761.3 to 774.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
58120	774.4 to 780.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
58121	784.8 to 799.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
58075	797.5 to 798.5 feet	**Vertical Change**	.75"	5 ft	5	REF		
58122	802.9 to 818.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
58123	818.4 to 825.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
58124	826.6 to 828.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
58158	829.3 to 845.0 feet	Key Note Segment		5 ft	79			
58125	845.6 to 850.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
58126	850.3 to 857.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
58127	863.2 to 870.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111032	KNOX AVE	SUNRISE AVE	A ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58159	870.9 to 887.5 feet	Key Note Segment		5 ft	83			
58076	887.8 to 888.8 feet	Vertical Change	.54"	5 ft	5	REF		
58128	889.1 to 891.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
58129	895.0 to 908.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	$8,040
58160	908.5 to 926.4 feet	Key Note Segment		5 ft	90			
58077	910.9 to 911.9 feet	Vertical Change	.36"	5 ft	5	REF		
58078	913.2 to 914.2 feet	Vertical Change	3.46"	5 ft	5	REF		
58130	926.4 to 932.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	30	SF	$40	$1,180
58131	937.0 to 939.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
58132	942.1 to 947.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,420
58133	950.1 to 951.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
58161	951.3 to 966.3 feet	Key Note Segment		5 ft	75			
58134	966.6 to 967.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
58135	967.8 to 971.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
58136	971.8 to 974.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,380
58162	975.2 to 987.9 feet	Key Note Segment		5 ft	64			
58079	976.4 to 977.4 feet	Vertical Change	.32"	5 ft	5	REF		
58137	989.2 to 992.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
58138	994.8 to 1006.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	$6,900
58139	1008.0 to 1020.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
58140	1021.0 to 1033.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,260
58141	1033.9 to 1051.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,320

TOTAL COST FOR: W *side of* **KNOX AVE** *Starting at:* **SUNRISE AVE** **$288,157.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111223	KNOX CT	138 KNOX CT	S A ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59304	1.1 to 20.5 feet	Key Note Segment		5 ft	97			
59290	20.5 to 24.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$700
59305	29.7 to 52.5 feet	Key Note Segment		5 ft	114			
59268	50.9 to 51.9 feet	Vertical Change	.35"	5 ft	5	REF		
59291	52.5 to 61.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	47	SF	$40	$1,860
59292	67.6 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
59306	71.3 to 93.3 feet	Key Note Segment		5 ft	110			
59269	92.6 to 93.6 feet	Vertical Change	-.3"	5 ft	5	REF		
59293	97.7 to 98.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
59294	99.7 to 101.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
59307	101.9 to 121.6 feet	Key Note Segment		5 ft	99			
59295	134.5 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
59308	161.9 to 182.3 feet	Key Note Segment		5 ft	102			
59270	180.7 to 183.5 feet	Vertical Change	.3"	5 ft	14	REF		
59296	182.5 to 187.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,080
59271	184.2 to 185.2 feet	Vertical Change	-.29"	5 ft	5	REF		
59272	187.4 to 188.4 feet	Vertical Change	.32"	5 ft	5	REF		
59273	189.1 to 190.1 feet	Vertical Change	1.98"	5 ft	5	SF	$75	$375
59309	189.3 to 209.9 feet	Key Note Segment		5 ft	103			
59274	190.9 to 191.9 feet	Vertical Change	.44"	5 ft	5	REF		
59297	212.1 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
59298	219.1 to 229.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
59275	231.9 to 232.9 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375
59299	236.5 to 240.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
59310	240.5 to 266.4 feet	Key Note Segment		5 ft	129			
59276	241.0 to 242.0 feet	Vertical Change	.35"	5 ft	5	REF		
59300	268.1 to 274.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
59311	275.3 to 297.1 feet	Key Note Segment		5 ft	109			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111223	KNOX CT	138 KNOX CT	S A ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59277	276.3 to 277.3 feet	Vertical Change	.28"	5 ft	5	REF		
59278	285.9 to 286.9 feet	Vertical Change	.61"	5 ft	5	REF		
59279	290.9 to 291.9 feet	Vertical Change	-.35"	5 ft	5	REF		
59280	295.4 to 296.4 feet	Vertical Change	-.46"	5 ft	5	REF		
59301	306.8 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
59281	330.6 to 331.6 feet	Vertical Change	.34"	5 ft	5	REF		
59312	337.3 to 359.1 feet	Key Note Segment		5 ft	109			
59282	339.1 to 342.8 feet	Vertical Change	.29"	5 ft	19	REF		
59283	347.8 to 348.8 feet	Vertical Change	-.35"	5 ft	5	REF		
59302	359.1 to 364.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	25	SF	$40	**$980**
59284	360.5 to 361.5 feet	Vertical Change	-.28"	5 ft	5	REF		
59285	363.4 to 364.4 feet	Vertical Change	.49"	5 ft	5	REF		
59313	364.3 to 382.3 feet	Key Note Segment		5 ft	90			
59286	365.9 to 366.9 feet	Vertical Change	-.34"	5 ft	5	REF		
59287	379.2 to 382.8 feet	Vertical Change	.29"	5 ft	18	REF		
59303	383.6 to 400.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
59288	394.5 to 395.5 feet	Vertical Change	-.26"	5 ft	5	REF		
59289	399.4 to 400.4 feet	Vertical Change	-.29"	5 ft	5	REF		
59314	399.4 to 400.7 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **KNOX CT** *Starting at:* **138 KNOX CT** **$53,910.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111220	KNOX CT	S A ST	158 KNOX CT	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59238	4.3 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
59239	20.4 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
59240	28.9 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
59241	35.4 to 38.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
59259	40.3 to 58.6 feet	Key Note Segment		5 ft	92			
59222	41.6 to 42.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
59242	59.9 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
59243	64.4 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
59260	67.2 to 87.3 feet	Key Note Segment		5 ft	101			
59223	84.4 to 85.4 feet	**Vertical Change**	1.39"	5 ft	5	REF		
59224	86.4 to 87.4 feet	**Vertical Change**	-.39"	5 ft	5	REF		
59244	89.9 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
59245	94.6 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
59246	114.1 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
59225	115.0 to 116.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
59226	125.8 to 126.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
59261	127.8 to 148.9 feet	Key Note Segment		5 ft	106			
59227	131.0 to 132.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59228	137.9 to 138.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
59229	147.4 to 148.4 feet	**Vertical Change**	-.39"	5 ft	5	REF		
59247	150.6 to 153.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
59230	152.8 to 153.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
59262	154.1 to 175.6 feet	Key Note Segment		5 ft	108			
59248	176.3 to 180.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$740**
59249	181.5 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
59231	198.7 to 199.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
59250	202.0 to 204.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
59232	202.5 to 203.5 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111220	KNOX CT	S A ST	158 KNOX CT	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59251	206.3 to 209.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
59252	209.8 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59263	214.5 to 235.4 feet	Key Note Segment		5 ft	105			
59264	239.8 to 261.2 feet	Key Note Segment		5 ft	107			
59233	259.6 to 260.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
59253	271.4 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59234	281.1 to 282.1 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
59254	288.8 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
59255	298.7 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
59265	306.5 to 327.8 feet	Key Note Segment		5 ft	107			
59235	309.2 to 310.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
59266	329.3 to 351.1 feet	Key Note Segment		5 ft	109			
59256	351.9 to 357.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
59257	357.7 to 360.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
59267	360.7 to 383.4 feet	Key Note Segment		5 ft	114			
59236	361.8 to 362.8 feet	**Vertical Change**	-.38"	5 ft	5	REF		
59237	372.7 to 373.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
59258	383.4 to 384.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**

TOTAL COST FOR: W *side of* **KNOX CT** *Starting at:* **S A ST** **$62,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191347	KNOX RD	LOS ARCOS LN	CHERRY ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74102	0.6 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
74103	4.4 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
74119	7.4 to 21.3 feet	Key Note Segment		5 ft	70			
74100	21.4 to 22.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
74104	36.8 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
74120	44.8 to 60.3 feet	Key Note Segment		5 ft	78			
74105	60.7 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
74121	70.4 to 86.8 feet	Key Note Segment		5 ft	82			
74106	98.2 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
74122	123.2 to 139.0 feet	Key Note Segment		5 ft	79			
74107	143.2 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
74123	148.8 to 164.8 feet	Key Note Segment		5 ft	80			
74124	201.8 to 215.6 feet	Key Note Segment		5 ft	69			
74108	223.9 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
74125	226.8 to 242.2 feet	Key Note Segment		5 ft	77			
74109	257.5 to 265.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
74110	274.6 to 278.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
74126	279.2 to 295.2 feet	Key Note Segment		5 ft	80			
74101	295.2 to 296.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
74111	295.2 to 304.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
74127	304.7 to 320.2 feet	Key Note Segment		5 ft	78			
74112	320.2 to 322.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
74113	322.3 to 331.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
74114	348.9 to 350.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
74115	352.6 to 353.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
74116	354.5 to 357.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
74117	360.9 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
74118	374.8 to 395.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191347	KNOX RD	LOS ARCOS LN	CHERRY ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74128	393.4 to 395.7 feet		5.0-6.0%	5 ft	12			
74129	393.4 to 395.7 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: W *side of* **KNOX RD** *Starting at:* **LOS ARCOS LN** **$65,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191343	KNOX RD	POMEGRANATE ST	DEL LAGO WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74052	0.6 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
74053	3.3 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
74054	11.4 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
74055	19.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
74056	26.4 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
74057	31.0 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
74058	57.4 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
74059	89.1 to 104.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
74060	105.9 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
74061	119.6 to 128.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
74062	129.3 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
74063	135.8 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
74064	150.1 to 152.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
74065	156.6 to 158.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
74066	158.8 to 160.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
74067	162.3 to 170.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
74068	172.1 to 192.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
74069	192.6 to 196.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
74070	196.7 to 198.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
74071	201.4 to 206.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
74072	209.3 to 214.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
74073	214.7 to 219.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
74074	219.4 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
74075	238.1 to 272.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	174	SF	$120	**$20,820**
74048	249.9 to 250.9 feet	**Vertical Change**	.8"	5 ft	5	REF		
74076	274.9 to 289.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,640**
74077	292.7 to 306.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
74078	308.0 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191343	KNOX RD	POMEGRANATE ST	DEL LAGO WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74079	313.9 to 336.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
74080	341.2 to 378.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,500**
74081	379.3 to 413.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	170	SF	$120	**$20,340**
74082	415.7 to 425.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
74083	426.3 to 435.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
74084	439.8 to 458.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
74085	461.7 to 471.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
74086	471.8 to 486.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
74087	489.3 to 503.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
74088	503.4 to 517.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
74089	520.3 to 532.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
74090	535.8 to 568.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
74091	571.0 to 588.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
74049	586.1 to 587.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
74050	589.9 to 590.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
74092	592.9 to 600.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
74093	600.9 to 606.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
74094	610.1 to 621.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
74051	619.2 to 620.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74095	621.7 to 623.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
74096	626.1 to 629.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
74097	629.3 to 638.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
74098	642.2 to 657.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,180**
74099	655.3 to 656.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **KNOX RD** *Starting at:* **POMEGRANATE ST** **$337,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181425	KNOX RD	RD 28	E ALMOND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71833	0.0 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
71834	14.4 to 26.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
71835	26.1 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
71836	36.8 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
71837	41.8 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
71838	51.9 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
71839	60.5 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
71840	65.5 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
71841	73.8 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
71842	83.5 to 87.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
71843	88.2 to 89.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71844	92.0 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
71845	101.0 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71846	105.2 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,260**
71847	145.9 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
71848	149.4 to 153.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
71849	153.6 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
71850	193.1 to 195.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
71851	198.7 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
71852	210.3 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
71853	240.6 to 243.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
71854	244.5 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
71855	263.6 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
71856	279.7 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
71857	286.8 to 288.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
71858	290.6 to 297.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
71859	297.9 to 318.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
71860	320.6 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181425	KNOX RD	RD 28	E ALMOND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71861	327.0 to 336.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
71862	336.5 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	452	SF	$120	**$54,180**
71863	429.8 to 434.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71864	440.9 to 486.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	227	SF	$120	**$27,180**
71865	488.8 to 518.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
71807	498.0 to 499.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
71808	510.9 to 511.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
71866	521.5 to 524.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
71867	527.6 to 532.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
71868	535.6 to 537.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
71869	540.5 to 543.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
71870	564.8 to 573.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
71871	575.3 to 580.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
71872	582.4 to 589.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
71809	587.1 to 588.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
71873	591.5 to 597.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
71874	601.8 to 603.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
71875	606.3 to 613.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
71876	633.2 to 647.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
71877	650.2 to 651.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
71810	650.6 to 651.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
71878	675.9 to 708.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
71811	700.5 to 701.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
71879	710.2 to 735.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
71812	719.1 to 720.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71880	740.6 to 758.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
71881	762.8 to 775.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
71882	779.0 to 792.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181425	KNOX RD	RD 28	E ALMOND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71883	795.3 to 800.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71884	804.0 to 821.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
71813	808.8 to 809.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
71885	824.3 to 853.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
71886	855.8 to 858.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
71887	859.1 to 903.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,460**
71814	873.1 to 874.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
71888	906.9 to 911.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
71815	910.7 to 911.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
71889	913.9 to 918.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
71816	919.4 to 920.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
71890	923.2 to 929.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
71817	928.2 to 929.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
71891	932.2 to 939.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
71818	941.3 to 942.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71892	944.6 to 950.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
71893	974.2 to 977.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
71819	978.6 to 979.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
71894	981.7 to 985.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71895	989.3 to 991.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
71896	996.5 to 1000.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71935	1004.3 to 1021.6 feet	Key Note Segment		5 ft	87			
71820	1014.3 to 1015.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
71897	1021.6 to 1023.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$340**
71898	1031.8 to 1037.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
71936	1041.3 to 1059.1 feet	Key Note Segment		5 ft	89			
71821	1050.9 to 1051.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
71899	1059.1 to 1060.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181425	KNOX RD	RD 28	E ALMOND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71900	1067.9 to 1071.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
71901	1077.0 to 1081.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71822	1078.7 to 1079.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
71902	1086.1 to 1087.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71903	1092.7 to 1094.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
71904	1094.8 to 1111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
71905	1113.8 to 1119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
71906	1126.1 to 1128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
71907	1134.1 to 1142.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
71823	1150.6 to 1151.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
71908	1173.2 to 1176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
71909	1182.5 to 1188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
71910	1201.3 to 1217.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
71824	1211.9 to 1212.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
71825	1222.5 to 1223.5 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
71911	1224.4 to 1250.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
71827	1258.3 to 1259.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
71828	1270.6 to 1271.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
71912	1271.3 to 1276.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
71913	1286.7 to 1294.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
71829	1296.5 to 1297.5 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
71914	1297.8 to 1303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
71915	1306.8 to 1336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
71916	1341.3 to 1346.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
71917	1350.1 to 1351.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
71918	1352.2 to 1364.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
71919	1364.5 to 1373.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
71920	1375.0 to 1388.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181425	KNOX RD	RD 28	E ALMOND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71830	1387.0 to 1388.0 feet	Vertical Change	.35"	5 ft	5	REF		
71921	1391.3 to 1410.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
71922	1411.3 to 1419.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
71923	1421.3 to 1424.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71924	1431.0 to 1438.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
71925	1441.3 to 1447.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
71926	1449.8 to 1451.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
71927	1458.0 to 1459.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
71928	1459.8 to 1461.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
71831	1462.8 to 1463.8 feet	Vertical Change	-.41"	5 ft	5	LF	$75	**$375**
71929	1466.3 to 1501.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
71930	1503.8 to 1523.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
71931	1523.8 to 1529.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
71932	1532.6 to 1549.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
71832	1548.2 to 1549.2 feet	Vertical Change	.29"	5 ft	5	REF		
71933	1552.3 to 1573.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
71934	1573.3 to 1575.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
71937	1576.5 to 1578.3 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: NE *side of* **KNOX RD** *Starting at:* **RD 28** **$663,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131133	KNOX ST	93 DRAKE ST	93 DRAKE ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62091	0.0 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
62092	20.1 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
62093	33.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
62094	36.8 to 38.2 feet		5.0-6.0%	5 ft	7			
62095	38.2 to 40.3 feet		6.0-7.0%	5 ft	10			
62096	38.2 to 40.3 feet	Running Slope	6.0-7.0%	5 ft	10	SF	$120	**$1,260**

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **93 DRAKE ST** **$13,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121100	KNOX ST	ARDILLA DR	OSO DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60253	0.6 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
60261	17.8 to 32.1 feet	Key Note Segment		5 ft	72			
60252	34.8 to 35.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
60254	38.1 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
60262	61.1 to 74.8 feet	Key Note Segment		5 ft	69			
60255	74.8 to 80.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,220**
60256	80.9 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
60263	86.7 to 100.6 feet	Key Note Segment		5 ft	70			
60257	100.6 to 122.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	111	SF	$40	**$4,440**
60258	127.1 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
60264	147.1 to 161.1 feet	Key Note Segment		5 ft	70			
60259	161.3 to 163.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
60265	172.8 to 187.3 feet	Key Note Segment		5 ft	73			
60260	193.3 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**

TOTAL COST FOR: E *side of* **KNOX ST** *Starting at:* **ARDILLA DR** **$54,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121105	KNOX ST	ARDILLA DR	OLIVE AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60290	0.4 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
60291	14.7 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
60292	31.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
60293	44.9 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
60294	54.6 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
60288	71.3 to 72.3 feet	**Vertical Change**	2.31"	5 ft	5	SF	$75	**$375**
60295	72.8 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
60289	81.1 to 82.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **ARDILLA DR** **$37,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191418	KNOX ST	CHERRY ST	NECTARINE ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74382	0.3 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
74383	4.9 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
74384	10.2 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
74385	33.3 to 60.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,260**
74379	50.9 to 51.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
74386	61.3 to 67.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
74387	70.0 to 82.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
74388	84.6 to 126.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	210	SF	$120	**$25,140**
74389	127.0 to 128.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
74390	128.9 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
74391	142.7 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,640**
74380	147.5 to 148.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
74392	162.4 to 166.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
74393	167.6 to 169.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
74394	170.8 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
74395	177.4 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
74396	181.9 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
74381	211.1 to 212.1 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
74397	214.3 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
74398	237.8 to 250.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
74399	250.8 to 252.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
74400	256.4 to 261.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **CHERRY ST** **$135,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131045	KNOX ST	DEL LAGO WAY	ORTEGA DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61707	1.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
61708	9.4 to 11.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
61709	11.4 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
61710	19.8 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	280	SF	$120	**$33,600**
61711	78.0 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
61712	85.8 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
61713	92.3 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
61714	119.3 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	407	SF	$120	**$48,780**
61715	208.2 to 214.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
61716	229.0 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
61717	244.7 to 247.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
61705	252.9 to 253.9 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
61718	255.8 to 290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
61719	290.5 to 294.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
61720	297.1 to 304.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,620**
61721	307.2 to 334.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**
61722	339.3 to 384.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	225	SF	$120	**$27,000**
61706	379.1 to 380.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
61723	387.3 to 390.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
61724	390.3 to 393.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61725	393.6 to 395.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **KNOX ST** *Starting at:* **DEL LAGO WAY** **$193,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191427	KNOX ST	E ALMOND AVE	POMEGRANATE ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74427	0.0 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
74428	12.3 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
74429	16.9 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
74430	50.2 to 52.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
74431	52.8 to 54.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
74432	57.0 to 62.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
74433	62.2 to 70.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
74434	71.1 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
74435	82.6 to 94.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
74436	96.6 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
74437	121.4 to 127.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
74438	131.9 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
74439	139.6 to 148.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
74440	150.3 to 167.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,500**
74441	171.1 to 178.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
74442	182.2 to 187.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
74443	187.7 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
74444	200.5 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
74445	206.0 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
74446	214.1 to 223.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
74447	224.0 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
74448	232.1 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
74449	236.7 to 250.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
74450	250.8 to 268.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
74451	273.7 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
74452	301.8 to 318.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
74453	318.4 to 336.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
74454	339.1 to 341.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191427	KNOX ST	E ALMOND AVE	POMEGRANATE ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74455	342.2 to 343.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
74456	345.7 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
74457	355.3 to 359.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
74458	359.5 to 362.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
74459	365.2 to 384.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
74460	386.2 to 406.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
74461	410.3 to 413.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
74462	428.4 to 471.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	213	SF	$120	**$25,560**
74463	471.4 to 479.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
74464	479.5 to 481.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
74465	485.2 to 491.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

TOTAL COST FOR: E *side of* **KNOX ST** *Starting at:* **E ALMOND AVE** **$244,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71675	0.0 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,360**
71676	21.3 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71677	26.8 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
71678	32.2 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
71793	44.8 to 65.3 feet	Key Note Segment		5 ft	103			
71652	55.0 to 56.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
71679	67.8 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
71653	75.2 to 76.2 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
71654	89.2 to 90.2 feet	**Vertical Change**	1.07"	5 ft	5	SF	$75	**$375**
71680	106.6 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
71681	117.3 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
71682	128.3 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
71683	135.2 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
71684	154.5 to 165.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
71685	169.2 to 178.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
71686	182.8 to 187.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
71687	187.8 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71688	192.1 to 197.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
71689	200.3 to 246.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	229	SF	$120	**$27,480**
71690	247.7 to 251.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
71655	251.0 to 252.0 feet	**Vertical Change**	1.15"	5 ft	5	REF		
71691	255.5 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,840**
71692	296.9 to 323.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	134	SF	$120	**$16,080**
71693	323.7 to 339.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
71694	341.4 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
71695	363.8 to 365.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
71696	367.1 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	281	SF	$120	**$33,720**
71656	425.5 to 426.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71697	430.9 to 439.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
71657	438.0 to 439.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
71698	441.8 to 444.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
71699	447.6 to 453.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71700	460.8 to 464.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71701	467.0 to 472.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
71702	472.9 to 500.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
71658	476.7 to 477.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
71659	501.1 to 502.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
71703	504.2 to 517.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
71704	518.3 to 525.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
71705	525.5 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71706	529.5 to 537.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,980**
71707	537.8 to 573.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,300**
71660	560.8 to 561.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
71708	575.7 to 579.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
71709	579.8 to 581.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71710	583.8 to 593.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
71711	593.9 to 625.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
71712	627.0 to 629.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
71713	630.8 to 635.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
71714	638.6 to 641.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
71715	643.2 to 647.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
71716	648.1 to 674.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
71661	675.0 to 676.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71717	679.1 to 698.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
71718	702.6 to 726.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
71719	730.6 to 743.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71720	746.6 to 753.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
71721	754.3 to 786.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
71722	788.9 to 808.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
71723	810.3 to 822.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
71724	829.1 to 830.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71725	836.8 to 847.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
71726	849.0 to 851.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
71727	851.8 to 896.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,060**
71728	898.2 to 899.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
71729	902.2 to 908.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
71662	905.5 to 906.5 feet	**Vertical Change**	1.55"	5 ft	5	REF		
71730	912.6 to 931.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
71731	932.4 to 935.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
71732	939.9 to 942.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
71733	948.8 to 958.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
71734	960.8 to 970.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
71735	971.3 to 984.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
71736	984.4 to 989.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
71737	989.9 to 990.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
71738	993.7 to 1004.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
71739	1010.4 to 1013.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
71740	1019.3 to 1022.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71741	1026.3 to 1029.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
71742	1039.3 to 1054.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
71663	1046.1 to 1047.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
71743	1060.0 to 1110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	251	SF	$120	**$30,120**
71744	1112.9 to 1117.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
71664	1120.1 to 1121.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71745	1125.4 to 1131.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
71746	1134.7 to 1149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
71747	1156.0 to 1158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
71748	1169.3 to 1177.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
71665	1182.7 to 1183.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
71749	1183.3 to 1192.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
71750	1195.5 to 1199.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
71751	1202.6 to 1209.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
71752	1209.8 to 1219.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
71753	1222.6 to 1230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
71666	1232.2 to 1233.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71754	1235.3 to 1238.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
71755	1242.0 to 1244.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
71756	1248.8 to 1260.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
71757	1263.3 to 1273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
71758	1276.1 to 1280.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
71759	1281.8 to 1283.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71667	1282.7 to 1283.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
71760	1285.7 to 1287.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
71761	1288.3 to 1291.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
71762	1293.8 to 1302.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
71763	1302.5 to 1306.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
71764	1306.7 to 1311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
71765	1311.3 to 1317.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
71766	1318.8 to 1322.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
71668	1319.8 to 1320.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
71767	1325.3 to 1326.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
71768	1326.3 to 1335.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71769	1338.0 to 1360.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
71669	1356.2 to 1357.2 feet	**Vertical Change**	.53"	5 ft	5	REF		
71770	1367.3 to 1379.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
71771	1388.5 to 1389.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
71670	1391.3 to 1392.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
71772	1396.0 to 1408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
71773	1410.7 to 1412.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
71774	1412.1 to 1416.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
71775	1429.0 to 1433.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
71776	1436.6 to 1442.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
71777	1448.0 to 1451.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71778	1456.7 to 1474.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
71779	1482.9 to 1517.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
71671	1517.9 to 1518.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71780	1521.9 to 1567.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	229	SF	$120	**$27,420**
71781	1570.3 to 1584.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
71782	1585.6 to 1593.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
71783	1597.9 to 1621.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
71784	1628.9 to 1632.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
71672	1633.6 to 1634.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
71785	1640.9 to 1645.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
71786	1653.2 to 1655.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
71787	1659.0 to 1667.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
71788	1672.0 to 1725.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	267	SF	$120	**$31,980**
71789	1728.0 to 1734.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
71790	1736.9 to 1753.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
71673	1737.8 to 1738.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
71791	1759.3 to 1761.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181410	KNOX ST	E ALMOND AVE	RD 28	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71674	1759.4 to 1760.4 feet	Vertical Change	.3"	5 ft	5	REF		
71792	1764.8 to 1769.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: SW *side of* **KNOX ST** *Starting at:* **E ALMOND AVE** **$801,870.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191422	KNOX ST	NECTARINE ST	E ALMOND AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74405	2.2 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
74406	32.3 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
74407	41.9 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
74408	43.4 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
74422	47.9 to 63.3 feet	Key Note Segment		5 ft	77			
74401	48.7 to 49.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74402	56.0 to 57.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
74409	63.5 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
74410	67.8 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
74411	87.0 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
74412	118.8 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
74413	128.3 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
74414	153.1 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
74415	164.8 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
74423	185.1 to 196.1 feet	Key Note Segment		5 ft	55			
74416	197.5 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
74417	225.8 to 232.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
74418	236.0 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
74424	278.7 to 295.8 feet	Key Note Segment		5 ft	86			
74419	296.8 to 299.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
74425	300.3 to 301.3 feet		5.0-6.0%	5 ft	5			
74403	300.7 to 301.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
74420	301.7 to 303.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
74421	306.2 to 309.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **NECTARINE ST** **$70,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131040	KNOX ST	NEPLUS WY	LOS ARCOS LN	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61670	3.8 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
61671	29.4 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
61672	51.8 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
61673	66.7 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
61674	84.8 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
61675	94.9 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61676	101.3 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
61667	109.5 to 110.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
61677	113.2 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
61678	142.1 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
61679	173.0 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
61680	177.0 to 190.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
61681	195.1 to 198.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
61682	210.0 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,740**
61668	258.7 to 259.7 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
61683	261.0 to 263.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61684	274.7 to 276.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
61685	308.2 to 310.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61686	315.4 to 321.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
61687	332.8 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
61669	342.2 to 343.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
61688	356.7 to 362.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
61689	373.2 to 386.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
61690	389.8 to 405.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
61691	412.5 to 422.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
61692	429.2 to 477.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	241	SF	$120	**$28,860**
61693	479.6 to 482.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
61694	485.2 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131040	KNOX ST	NEPLUS WY	LOS ARCOS LN	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61695	491.0 to 508.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
61696	511.8 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61697	531.8 to 537.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
61698	540.7 to 546.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
61699	555.0 to 557.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61700	580.4 to 598.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
61701	616.5 to 648.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
61702	666.3 to 676.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
61703	692.6 to 695.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61704	694.6 to 695.7 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **NEPLUS WY** **$228,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121107	KNOX ST	OLIVE AVE	ARDILLA DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60298	0.0 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
60299	7.0 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
60300	8.3 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
60296	15.1 to 16.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
60301	17.5 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
60302	30.2 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
60297	61.4 to 62.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
60303	64.7 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
60304	77.5 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: E *side of* **KNOX ST** *Starting at:* **OLIVE AVE** **$37,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131048	KNOX ST	ORTEGA DR	OLIVE AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61729	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
61730	4.7 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
61731	16.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
61732	31.8 to 50.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
61733	52.7 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
61734	75.2 to 82.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
61735	82.8 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61736	95.5 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61737	127.3 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
61738	135.9 to 160.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
61739	163.5 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
61740	178.4 to 199.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**
61741	202.6 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,620**
61742	234.3 to 273.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	198	SF	$120	**$23,700**
61743	277.2 to 280.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
61744	281.1 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,180**
61726	314.1 to 315.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
61745	318.5 to 361.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,620**
61727	327.3 to 328.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
61746	364.0 to 367.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
61747	373.0 to 376.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
61748	376.8 to 397.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
61728	399.9 to 400.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
61749	401.2 to 402.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
61750	403.9 to 412.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
61751	419.3 to 433.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**

TOTAL COST FOR: E *side of* **KNOX ST** *Starting at:* **ORTEGA DR** **$201,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121103	KNOX ST	OSO DR	ARDILLA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60271	2.4 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
60272	13.8 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
60283	15.8 to 30.3 feet	Key Note Segment		5 ft	73			
60273	30.3 to 33.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
60274	34.3 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
60284	42.3 to 57.6 feet	Key Note Segment		5 ft	77			
60266	58.0 to 59.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
60275	58.0 to 81.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	117	SF	$40	**$4,680**
60276	82.3 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
60267	82.7 to 83.7 feet	**Vertical Change**	2.51"	5 ft	5	REF		
60277	89.5 to 101.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
60285	101.5 to 116.8 feet	Key Note Segment		5 ft	77			
60278	121.3 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
60286	127.6 to 142.7 feet	Key Note Segment		5 ft	75			
60268	142.4 to 143.4 feet	**Vertical Change**	1.09"	5 ft	5	REF		
60279	143.4 to 162.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	94	SF	$40	**$3,760**
60269	152.2 to 153.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
60280	162.9 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
60270	163.8 to 164.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
60287	169.8 to 185.2 feet	Key Note Segment		5 ft	77			
60281	185.2 to 203.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	93	SF	$40	**$3,700**
60282	204.1 to 205.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: W *side of* **KNOX ST** *Starting at:* **OSO DR** **$43,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101529	KOUFAX DR	DRYSDALE WAY	LILLY ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57316	0.0 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
57308	2.5 to 3.5 feet	**Vertical Change**	.54"	5 ft	5	REF		
57330	11.7 to 31.9 feet	Key Note Segment		5 ft	101			
57309	12.8 to 13.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
57317	31.9 to 39.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,580**
57318	40.1 to 43.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
57319	43.6 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
57331	47.5 to 69.9 feet	Key Note Segment		5 ft	112			
57320	71.7 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
57321	82.0 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
57332	93.1 to 112.4 feet	Key Note Segment		5 ft	97			
57322	113.1 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
57333	119.3 to 138.6 feet	Key Note Segment		5 ft	97			
57310	135.6 to 136.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
57323	140.4 to 141.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
57324	141.4 to 162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
57311	156.5 to 157.5 feet	**Vertical Change**	3.39"	5 ft	5	REF		
57334	163.7 to 184.0 feet	Key Note Segment		5 ft	102			
57312	173.2 to 174.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
57313	183.2 to 184.2 feet	**Vertical Change**	.57"	5 ft	5	REF		
57325	184.5 to 185.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
57326	187.6 to 195.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
57327	196.2 to 208.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
57335	208.8 to 229.4 feet	Key Note Segment		5 ft	103			
57314	219.2 to 220.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
57315	225.8 to 229.3 feet	**Vertical Change**	.39"	5 ft	18	REF		
57328	229.4 to 248.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	95	SF	$40	**$3,800**
57329	248.7 to 260.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101529	KOUFAX DR	DRYSDALE WAY	LILLY ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NW	*side of* **KOUFAX DR**	*Starting at:* **DRYSDALE WAY**						**$61,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101503	KOUFAX DR	LILLY ST	DRYSDALE WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57078	0.0 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
57079	14.4 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
57080	40.0 to 48.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
57081	49.3 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
57082	83.2 to 87.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
57083	87.9 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	272	SF	$120	**$32,640**
57075	99.0 to 100.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
57076	110.0 to 111.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
57077	133.9 to 134.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
57084	142.5 to 146.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: SE *side of* **KOUFAX DR** *Starting at:* **LILLY ST** **$81,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191152	LA COSTA CT	1449 LA COSTA CT	CORONA DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73760	0.8 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
73761	4.6 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
73755	6.1 to 7.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
73762	15.0 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
73756	21.6 to 22.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
73763	27.9 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
73770	29.3 to 47.4 feet	Key Note Segment		5 ft	91			
73757	33.1 to 34.1 feet	**Vertical Change**	.66"	5 ft	5	REF		
73758	38.7 to 39.7 feet	**Vertical Change**	.66"	5 ft	5	REF		
73759	46.9 to 47.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
73764	49.2 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73771	55.8 to 75.5 feet	Key Note Segment		5 ft	99			
73765	77.8 to 79.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
73766	79.6 to 80.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
73767	82.3 to 84.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
73768	85.5 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
73769	95.0 to 96.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **LA COSTA CT** *Starting at:* **1449 LA COSTA CT** **$23,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191151	LA COSTA CT	CORONA DR	1444 LA COSTA CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73746	2.5 to 13.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
73747	14.1 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
73752	21.4 to 41.3 feet	Key Note Segment		5 ft	100			
73748	43.4 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
73753	48.9 to 67.4 feet	Key Note Segment		5 ft	93			
73744	66.5 to 67.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
73749	74.6 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
73750	91.2 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
73754	98.5 to 117.0 feet	Key Note Segment		5 ft	93			
73745	99.4 to 100.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
73751	122.8 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **LA COSTA CT** *Starting at:* **CORONA DR** **$26,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071237	LA JOLLA CT	1128 LA JOLLA CT	BRIQUEL AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123339	0.3 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
123352	3.3 to 22.8 feet	Key Note Segment		5 ft	98			
123333	10.7 to 11.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
123334	23.4 to 24.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
123340	24.4 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
123341	32.6 to 34.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
123353	34.6 to 53.8 feet	Key Note Segment		5 ft	96			
123335	54.2 to 55.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
123342	59.3 to 64.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
123343	64.2 to 65.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
123336	65.8 to 66.8 feet	**Vertical Change**	-1.53"	5 ft	5	REF		
123344	66.5 to 67.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
123345	68.4 to 69.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
123346	69.8 to 77.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
123347	77.3 to 95.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
123354	97.2 to 115.3 feet	Key Note Segment		5 ft	91			
123348	117.6 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
123355	122.6 to 142.2 feet	Key Note Segment		5 ft	98			
123337	136.2 to 137.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
123349	143.5 to 174.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,420**
123356	174.2 to 193.0 feet	Key Note Segment		5 ft	94			
123338	175.0 to 176.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
123350	196.3 to 212.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	79	SF	$120	**$9,420**
123351	214.8 to 220.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: S *side of* **LA JOLLA CT** *Starting at:* **1128 LA JOLLA CT** **$61,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071235	LA JOLLA CT	TALISE AVE	1128 LA JOLLA CT	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123293	2.1 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
123269	8.6 to 9.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
123294	10.2 to 24.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
123322	24.4 to 44.3 feet	Key Note Segment		5 ft	100			
123295	45.8 to 46.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
123296	49.7 to 50.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
123323	50.8 to 69.8 feet	Key Note Segment		5 ft	95			
123270	51.4 to 52.4 feet	**Vertical Change**	.5"	5 ft	5	REF		
123297	71.9 to 115.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	218	SF	$120	**$26,220**
123298	116.8 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
123299	124.4 to 127.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
123324	128.3 to 147.8 feet	Key Note Segment		5 ft	98			
123272	128.9 to 129.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
123300	149.5 to 155.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
123325	155.0 to 173.3 feet	Key Note Segment		5 ft	92			
123273	155.7 to 156.7 feet	**Vertical Change**	1.91"	5 ft	5	REF		
123274	167.9 to 168.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
123275	173.8 to 174.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
123301	173.8 to 174.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
123302	175.4 to 198.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
123276	177.8 to 178.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123303	201.6 to 204.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
123304	205.4 to 218.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
123277	206.1 to 207.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
123305	219.6 to 230.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
123326	232.3 to 251.3 feet	Key Note Segment		5 ft	95			
123278	244.2 to 245.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
123306	253.8 to 257.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071235	LA JOLLA CT	TALISE AVE	1128 LA JOLLA CT	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123327	257.6 to 276.8 feet	Key Note Segment		5 ft	96			
123279	272.2 to 273.2 feet	Vertical Change	.34"	5 ft	5	REF		
123280	277.2 to 278.2 feet	Vertical Change	.33"	5 ft	5	REF		
123307	282.1 to 294.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
123308	301.5 to 308.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
123309	312.6 to 315.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
123310	318.0 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
123311	326.0 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
123328	335.2 to 354.0 feet	Key Note Segment		5 ft	94			
123281	336.0 to 337.0 feet	Vertical Change	.43"	5 ft	5	REF		
123282	354.3 to 355.3 feet	Vertical Change	.26"	5 ft	5	REF		
123312	355.8 to 360.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
123329	361.5 to 379.8 feet	Key Note Segment		5 ft	92			
123283	362.0 to 363.0 feet	Vertical Change	.56"	5 ft	5	REF		
123313	383.8 to 389.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
123314	392.2 to 398.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
123284	392.8 to 393.8 feet	Vertical Change	.57"	5 ft	5	REF		
123315	400.5 to 405.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
123316	407.2 to 414.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
123285	407.3 to 408.3 feet	Vertical Change	.66"	5 ft	5	REF		
123286	426.5 to 427.5 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
123317	431.0 to 433.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
123318	434.0 to 443.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
123330	443.1 to 463.0 feet	Key Note Segment		5 ft	100			
123287	443.7 to 444.7 feet	Vertical Change	-.58"	5 ft	5	REF		
123288	456.0 to 457.0 feet	Vertical Change	.32"	5 ft	5	REF		
123289	464.8 to 465.8 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
123331	466.0 to 485.3 feet	Key Note Segment		5 ft	97			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071235	LA JOLLA CT	TALISE AVE	1128 LA JOLLA CT	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123290	468.7 to 469.7 feet	Vertical Change	-.31"	5 ft	5	REF		
123319	487.4 to 492.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
123332	492.3 to 511.6 feet	Key Note Segment		5 ft	97			
123291	492.9 to 493.9 feet	Vertical Change	.37"	5 ft	5	REF		
123292	512.2 to 513.2 feet	Vertical Change	1.37"	5 ft	5	REF		
123320	512.3 to 513.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
123321	513.3 to 514.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **LA JOLLA CT** *Starting at:* **TALISE AVE** **$131,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071611	LA JOLLA WY	1450 LA JOLLA WAY	1522 LA JOLLA WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125123	0.2 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
125140	2.1 to 20.8 feet	Key Note Segment		5 ft	94			
125113	2.5 to 3.5 feet	**Vertical Change**	.52"	5 ft	5	REF		
125124	23.5 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
125141	28.0 to 46.8 feet	Key Note Segment		5 ft	94			
125114	46.8 to 47.8 feet	**Vertical Change**	-.58"	5 ft	5	REF		
125125	48.1 to 64.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
125115	53.9 to 54.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
125126	67.2 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
125127	75.7 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
125128	98.7 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
125142	105.3 to 123.4 feet	Key Note Segment		5 ft	91			
125116	124.5 to 125.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
125129	126.4 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
125143	131.7 to 150.3 feet	Key Note Segment		5 ft	93			
125117	138.5 to 139.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
125118	150.9 to 151.9 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
125130	152.3 to 156.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
125131	156.9 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
125132	163.2 to 208.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	225	SF	$120	**$26,940**
125119	174.5 to 175.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
125120	191.9 to 192.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
125144	208.6 to 227.5 feet	Key Note Segment		5 ft	95			
125133	228.9 to 235.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
125145	235.0 to 253.5 feet	Key Note Segment		5 ft	93			
125121	247.8 to 248.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
125134	255.5 to 260.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
125135	261.2 to 263.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071611	LA JOLLA WY	1450 LA JOLLA WAY	1522 LA JOLLA WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125136	264.3 to 268.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
125137	268.7 to 274.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,540**
125138	275.8 to 293.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	**$10,800**
125122	278.3 to 279.3 feet	**Vertical Change**	.54"	5 ft	5	REF		
125139	297.3 to 311.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**

TOTAL COST FOR: S *side of* **LA JOLLA WY** *Starting at:* **1450 LA JOLLA WAY** **$98,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071613	LA JOLLA WY	1546 LA JOLLA WAY	SALVADOR WY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125156	0.0 to 2.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
125171	3.5 to 22.2 feet	Key Note Segment		5 ft	94			
125146	3.9 to 4.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
125147	10.2 to 11.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
125148	16.7 to 17.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
125149	22.8 to 23.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
125157	23.5 to 33.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
125158	33.6 to 35.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
125159	36.3 to 50.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,640**
125160	53.3 to 74.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,480**
125161	74.1 to 76.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
125162	76.8 to 80.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
125172	81.3 to 100.3 feet	Key Note Segment		5 ft	95			
125150	82.3 to 83.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
125151	88.5 to 89.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
125163	101.3 to 102.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
125164	104.3 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
125173	107.4 to 126.6 feet	Key Note Segment		5 ft	96			
125152	120.7 to 121.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
125165	128.2 to 139.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
125166	141.9 to 155.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
125167	156.2 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
125174	158.3 to 177.8 feet	Key Note Segment		5 ft	97			
125153	159.5 to 160.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		
125154	178.3 to 179.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
125168	181.2 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
125169	194.7 to 201.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
125155	196.4 to 197.4 feet	**Vertical Change**	.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071613	LA JOLLA WY	1546 LA JOLLA WAY	SALVADOR WY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125170	202.2 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: S *side of* **LA JOLLA WY** *Starting at:* **1546 LA JOLLA WAY** **$66,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071608	LA JOLLA WY	BRIQUEL AVE	1450 LA JOLLA WY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125074	0.0 to 19.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
125044	8.7 to 9.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
125101	25.6 to 43.8 feet	Key Note Segment		5 ft	91			
125046	32.1 to 33.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
125047	38.6 to 39.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
125111	43.8 to 45.0 feet		5.0-6.0%	5 ft	6			
125048	44.6 to 45.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
125075	45.9 to 47.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
125076	48.7 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
125102	51.1 to 69.7 feet	Key Note Segment		5 ft	93			
125049	51.4 to 52.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
125112	69.7 to 70.8 feet		5.0-6.0%	5 ft	6			
125077	71.3 to 97.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
125050	76.9 to 77.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
125051	94.4 to 95.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
125078	100.6 to 103.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
125079	105.0 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
125080	114.8 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
125081	124.1 to 128.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
125052	128.1 to 129.1 feet	**Vertical Change**	.85"	5 ft	5	REF		
125103	128.2 to 147.3 feet	Key Note Segment		5 ft	96			
125053	147.6 to 148.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
125104	154.5 to 173.4 feet	Key Note Segment		5 ft	95			
125054	154.9 to 155.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
125055	173.5 to 174.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
125082	176.8 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
125083	190.9 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
125056	197.5 to 198.5 feet	**Vertical Change**	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071608	LA JOLLA WY	BRIQUEL AVE	1450 LA JOLLA WY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125084	211.0 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
125057	215.5 to 216.5 feet	**Vertical Change**	.65"	5 ft	5	REF		
125085	226.1 to 231.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
125058	231.2 to 232.2 feet	**Vertical Change**	.75"	5 ft	5	REF		
125105	231.8 to 251.2 feet	Key Note Segment		5 ft	97			
125086	253.0 to 257.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
125106	257.7 to 276.6 feet	Key Note Segment		5 ft	95			
125059	258.5 to 259.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
125060	264.6 to 265.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
125061	271.0 to 272.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
125087	280.6 to 283.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
125088	284.2 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,360**
125062	284.8 to 285.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
125063	293.5 to 294.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
125064	308.5 to 309.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125089	327.0 to 335.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
125107	335.8 to 354.2 feet	Key Note Segment		5 ft	92			
125108	361.8 to 380.2 feet	Key Note Segment		5 ft	92			
125090	383.8 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125091	389.5 to 398.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
125092	399.5 to 403.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
125065	402.5 to 403.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
125093	403.8 to 406.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
125094	408.7 to 422.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
125066	416.0 to 417.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
125095	424.9 to 432.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
125096	432.5 to 438.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
125109	438.8 to 458.2 feet	Key Note Segment		5 ft	97			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071608	LA JOLLA WY	BRIQUEL AVE	1450 LA JOLLA WY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125068	439.5 to 440.5 feet	Vertical Change	.26"	5 ft	5	REF		
125069	452.3 to 453.3 feet	Vertical Change	-.35"	5 ft	5	REF		
125070	458.7 to 459.7 feet	Vertical Change	.34"	5 ft	5	REF		
125097	459.3 to 464.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
125110	465.0 to 483.8 feet	Key Note Segment		5 ft	94			
125071	484.4 to 485.4 feet	Vertical Change	-.4"	5 ft	5	REF		
125098	485.4 to 495.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
125099	495.3 to 508.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,920**
125072	504.8 to 505.8 feet	Vertical Change	-.27"	5 ft	5	REF		
125100	509.0 to 535.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$15,960**
125073	524.6 to 525.6 feet	Vertical Change	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **LA JOLLA WY** *Starting at:* **BRIQUEL AVE** **$160,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071623	LA JOLLA WY	SALVADOR WY	ZAPATA ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125235	0.0 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,820**
125236	10.2 to 13.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
125256	15.3 to 33.8 feet	Key Note Segment		5 ft	92			
125224	15.7 to 16.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
125257	40.8 to 59.2 feet	Key Note Segment		5 ft	92			
125225	41.2 to 42.2 feet	**Vertical Change**	3.38"	5 ft	5	REF		
125237	63.5 to 67.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
125238	67.2 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,080**
125226	76.5 to 77.5 feet	**Vertical Change**	.62"	5 ft	5	REF		
125227	85.2 to 86.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
125228	93.9 to 94.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
125239	103.9 to 118.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
125258	119.1 to 139.1 feet	Key Note Segment		5 ft	100			
125229	126.8 to 127.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
125230	139.5 to 140.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
125259	145.1 to 163.7 feet	Key Note Segment		5 ft	93			
125240	163.9 to 165.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$220**
125241	166.4 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
125242	171.5 to 181.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
125243	185.0 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
125244	193.3 to 199.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
125245	200.3 to 203.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
125246	207.3 to 213.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
125247	217.8 to 222.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
125260	222.2 to 241.4 feet	Key Note Segment		5 ft	96			
125231	222.8 to 223.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
125248	243.2 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
125261	248.1 to 268.0 feet	Key Note Segment		5 ft	100			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071623	LA JOLLA WY	SALVADOR WY	ZAPATA ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125232	248.9 to 249.9 feet	Vertical Change	-.37"	5 ft	5	REF		
125249	271.2 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
125250	279.4 to 292.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
125251	293.3 to 300.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
125233	300.5 to 301.5 feet	Vertical Change	.45"	5 ft	5	REF		
125252	300.8 to 325.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
125262	325.5 to 345.2 feet	Key Note Segment		5 ft	99			
125234	326.3 to 327.3 feet	Vertical Change	.33"	5 ft	5	REF		
125253	347.8 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
125263	351.3 to 370.5 feet	Key Note Segment		5 ft	96			
125254	374.4 to 377.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
125255	380.8 to 397.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**

TOTAL COST FOR: N *side of* **LA JOLLA WY** *Starting at:* **SALVADOR WY** **$110,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071631	LA JOLLA WY	ZAPATA ST	TALISE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125291	0.3 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
125292	11.4 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
125308	25.0 to 44.8 feet	Key Note Segment		5 ft	99			
125293	51.8 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
125277	52.4 to 53.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
125294	63.1 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
125309	77.1 to 96.3 feet	Key Note Segment		5 ft	96			
125278	77.4 to 78.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
125279	84.0 to 85.0 feet	**Vertical Change**	.82"	5 ft	5	REF		
125295	98.0 to 99.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
125296	99.0 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
125310	103.5 to 122.0 feet	Key Note Segment		5 ft	93			
125297	127.9 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
125298	134.5 to 181.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	**$27,960**
125280	163.6 to 164.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
125311	181.8 to 200.1 feet	Key Note Segment		5 ft	92			
125281	181.9 to 182.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
125282	200.6 to 201.6 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
125299	202.4 to 206.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
125300	206.4 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125312	207.8 to 226.3 feet	Key Note Segment		5 ft	93			
125301	227.3 to 234.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
125302	236.1 to 267.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	157	SF	$120	**$18,840**
125303	272.2 to 284.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
125313	284.4 to 303.0 feet	Key Note Segment		5 ft	93			
125284	285.4 to 286.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
125285	297.8 to 298.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
125304	305.5 to 310.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071631	LA JOLLA WY	ZAPATA ST	TALISE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125314	310.6 to 329.4 feet	Key Note Segment		5 ft	94			
125287	323.7 to 324.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
125288	330.1 to 331.1 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
125305	334.3 to 360.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,960**
125315	362.4 to 381.2 feet	Key Note Segment		5 ft	94			
125289	363.0 to 364.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
125290	381.7 to 382.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
125306	383.3 to 389.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
125307	392.1 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**

TOTAL COST FOR: N *side of* **LA JOLLA WY** *Starting at:* **ZAPATA ST** **$112,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108130933	LA PERLA LN	LAS FRESAS WAY	VARBELLA PK	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61254	0.0 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
61270	14.4 to 36.2 feet	Key Note Segment		5 ft	109			
61255	37.8 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61256	42.5 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
61257	51.8 to 58.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
61271	58.0 to 77.7 feet	Key Note Segment		5 ft	99			
61247	67.2 to 68.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
61258	80.3 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61259	86.8 to 91.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
61260	91.6 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
61261	98.2 to 102.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
61262	104.4 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
61248	107.2 to 108.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
61272	110.1 to 130.0 feet	Key Note Segment		5 ft	100			
61250	120.1 to 121.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
61263	132.2 to 135.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
61273	135.9 to 156.2 feet	Key Note Segment		5 ft	101			
61264	156.3 to 170.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	72	SF	$40	**$2,880**
61265	174.7 to 195.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
61266	195.0 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
61251	196.5 to 197.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
61274	212.9 to 232.8 feet	Key Note Segment		5 ft	100			
61267	237.3 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
61275	250.8 to 272.3 feet	Key Note Segment		5 ft	108			
61252	272.1 to 273.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
61268	273.7 to 281.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
61269	281.8 to 294.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
61253	285.6 to 286.6 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108130933	LA PERLA LN	LAS FRESAS WAY	VARBELLA PK	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61276	292.8 to 294.4 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **LA PERLA LN** *Starting at:* **LAS FRESAS WAY** **$78,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108130909	LA PERLA LN	VARBELLA PK	LAS FRESAS WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61107	1.3 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
61108	4.8 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
61109	20.2 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
61121	22.4 to 42.5 feet	Key Note Segment		5 ft	101			
61105	42.0 to 43.0 feet	**Vertical Change**	-.45"	5 ft	5	REF		
61110	44.8 to 47.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
61122	47.0 to 68.4 feet	Key Note Segment		5 ft	107			
61111	68.4 to 77.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	45	SF	$40	**$1,800**
61112	79.8 to 99.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
61123	99.4 to 119.6 feet	Key Note Segment		5 ft	101			
61113	120.0 to 146.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	130	SF	$40	**$5,200**
61114	146.0 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
61115	150.8 to 171.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
61124	171.0 to 190.6 feet	Key Note Segment		5 ft	98			
61116	191.0 to 194.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
61117	204.3 to 219.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
61125	219.9 to 240.6 feet	Key Note Segment		5 ft	104			
61118	243.8 to 246.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
61126	246.8 to 267.4 feet	Key Note Segment		5 ft	103			
61119	268.8 to 273.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
61120	274.8 to 290.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	80	SF	$120	**$9,660**
61106	289.1 to 290.1 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **LA PERLA LN** *Starting at:* **VARBELLA PK** **$67,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191129	LA QUINTA WAY	1343 LA QUINTA WAY	RANCHO MIRAGE RD	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73566	0.0 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
73567	3.5 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
73568	13.3 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
73565	18.8 to 19.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **LA QUINTA WAY** *Starting at:* **1343 LA QUINTA WAY** **$9,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110190943	LA QUINTA WAY	HACIENDA ST	SAN GABRIEL DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72593	1.3 to 3.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
72594	3.7 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
72584	5.3 to 6.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
72595	9.0 to 13.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,322**
72596	16.5 to 17.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
72627	19.8 to 40.3 feet	Key Note Segment		5 ft	92			
72597	42.6 to 46.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,052**
72628	47.9 to 68.1 feet	Key Note Segment		5 ft	91			
72585	57.5 to 58.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
72598	68.7 to 88.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,638**
72599	88.9 to 117.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,444**
72600	119.8 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,214**
72601	126.0 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,212**
72629	133.8 to 154.0 feet	Key Note Segment		5 ft	91			
72586	144.4 to 145.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
72602	155.6 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
72603	159.4 to 162.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,404**
72630	162.2 to 181.2 feet	Key Note Segment		5 ft	86			
72604	182.7 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,826**
72587	190.9 to 191.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
72588	201.6 to 202.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
72605	206.9 to 210.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,052**
72606	225.8 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72607	230.4 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,046**
72631	248.3 to 267.9 feet	Key Note Segment		5 ft	88			
72608	268.6 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,754**
72632	276.3 to 295.1 feet	Key Note Segment		5 ft	85			
72590	277.0 to 278.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110190943	LA QUINTA WAY	HACIENDA ST	SAN GABRIEL DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72609	295.4 to 301.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,152
72610	304.2 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,344
72611	320.0 to 321.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$702
72612	333.2 to 334.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$702
72613	338.3 to 339.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$594
72614	339.9 to 355.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,532
72615	358.3 to 359.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$648
72633	361.5 to 381.5 feet	Key Note Segment		5 ft	90			
72616	383.8 to 388.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,538
72634	389.8 to 408.4 feet	Key Note Segment		5 ft	84			
72617	409.6 to 411.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,026
72618	412.5 to 421.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,752
72591	421.5 to 422.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	$338
72619	424.6 to 432.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,104
72592	435.2 to 436.2 feet	Vertical Change	.44"	5 ft	5	REF		
72620	435.2 to 443.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,590
72621	443.7 to 445.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$918
72635	445.6 to 465.6 feet	Key Note Segment		5 ft	90			
72622	468.4 to 474.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,024
72623	477.9 to 483.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,186
72624	483.8 to 492.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,536
72625	494.3 to 505.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	$5,778
72636	505.0 to 524.6 feet	Key Note Segment		5 ft	88			
72626	525.8 to 530.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,754

TOTAL COST FOR: S *side of* **LA QUINTA WAY** *Starting at:* **HACIENDA ST** **$125,689.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110190939	LA QUINTA WAY	RANCHO MIRAGE RD	HACIENDA ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72562	3.0 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
72578	7.0 to 24.3 feet	Key Note Segment		5 ft	78			
72563	27.9 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
72579	33.0 to 51.3 feet	Key Note Segment		5 ft	82			
72561	51.2 to 52.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
72564	52.2 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
72565	64.2 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,350**
72566	67.3 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
72567	73.5 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
72568	78.7 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
72569	82.3 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
72570	99.0 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
72571	106.8 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
72580	111.5 to 131.2 feet	Key Note Segment		5 ft	89			
72572	131.5 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,158**
72581	139.2 to 159.2 feet	Key Note Segment		5 ft	90			
72573	160.5 to 164.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,052**
72574	164.3 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,536**
72575	175.2 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,154**
72582	190.3 to 210.8 feet	Key Note Segment		5 ft	92			
72576	217.1 to 224.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,104**
72577	224.8 to 226.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$648**
72583	224.8 to 226.3 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: S *side of* **LA QUINTA WAY** *Starting at:* **RANCHO MIRAGE RD** **$48,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191128	LA QUINTA WAY	SAN GABRIEL DR	1353 LA QUINTA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73514	0.8 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
73498	1.5 to 2.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
73515	11.1 to 19.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
73551	21.9 to 42.4 feet	Key Note Segment		5 ft	103			
73516	43.3 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
73499	52.0 to 53.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
73517	69.2 to 73.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
73552	73.7 to 94.1 feet	Key Note Segment		5 ft	102			
73500	84.4 to 85.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
73518	94.1 to 95.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
73519	95.3 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
73553	102.2 to 121.7 feet	Key Note Segment		5 ft	98			
73501	102.8 to 103.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
73520	125.3 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
73502	140.5 to 141.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
73521	160.9 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
73522	164.9 to 175.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
73554	177.4 to 197.1 feet	Key Note Segment		5 ft	99			
73503	178.8 to 179.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
73523	197.9 to 201.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
73555	207.3 to 225.4 feet	Key Note Segment		5 ft	91			
73524	225.4 to 239.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	70	SF	$40	**$2,800**
73525	241.6 to 253.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
73526	255.8 to 262.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
73527	264.4 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
73556	281.4 to 301.2 feet	Key Note Segment		5 ft	99			
73504	282.2 to 283.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
73505	301.2 to 302.2 feet	**Vertical Change**	.43"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191128	LA QUINTA WAY	SAN GABRIEL DR	1353 LA QUINTA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73528	305.1 to 308.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
73557	308.8 to 329.3 feet	Key Note Segment		5 ft	103			
73529	330.4 to 383.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	265	SF	$120	**$31,800**
73530	383.7 to 385.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
73558	385.0 to 404.7 feet	Key Note Segment		5 ft	99			
73506	395.8 to 396.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
73531	407.7 to 412.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
73559	413.1 to 432.2 feet	Key Note Segment		5 ft	96			
73532	433.0 to 447.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
73507	434.5 to 435.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
73533	449.8 to 453.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
73534	456.1 to 460.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
73535	461.4 to 465.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
73536	468.5 to 482.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
73537	485.7 to 488.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
73560	488.6 to 507.8 feet	Key Note Segment		5 ft	96			
73538	510.1 to 516.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
73508	510.6 to 511.6 feet	**Vertical Change**	-.38"	5 ft	5	REF		
73561	516.6 to 535.8 feet	Key Note Segment		5 ft	96			
73539	536.9 to 554.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
73540	557.0 to 563.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,780**
73541	568.0 to 575.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
73542	577.4 to 579.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
73543	580.6 to 586.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
73544	587.7 to 592.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
73562	592.7 to 611.7 feet	Key Note Segment		5 ft	95			
73545	613.1 to 618.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
73563	619.3 to 639.2 feet	Key Note Segment		5 ft	100			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191128	LA QUINTA WAY	SAN GABRIEL DR	1353 LA QUINTA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73509	629.5 to 630.5 feet	Vertical Change	.29"	5 ft	5	REF		
73510	639.0 to 640.0 feet	Vertical Change	.28"	5 ft	5	REF		
73546	642.3 to 652.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
73511	649.6 to 650.6 feet	Vertical Change	.26"	5 ft	5	REF		
73512	656.2 to 657.2 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
73547	659.9 to 670.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
73548	673.2 to 681.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
73549	683.7 to 686.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
73564	689.3 to 715.5 feet	Key Note Segment		5 ft	131			
73513	699.4 to 700.4 feet	Vertical Change	.51"	5 ft	5	REF		
73550	716.3 to 724.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	39	SF	$40	**$1,540**

TOTAL COST FOR: N *side of* **LA QUINTA WAY** *Starting at:* **SAN GABRIEL DR** **$204,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071307	LACRETA AVE	1216 LACRETA AVE	JESSIE DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123640	1.1 to 4.9 feet	Cross Slope (PAR)	13.0-14.0%	4 ft	15	SF	$120	**$1,824**
123644	4.9 to 21.3 feet	Key Note Segment		4 ft	66			
123637	5.3 to 6.3 feet	**Vertical Change**	-1.02"	4 ft	4	REF		
123641	23.9 to 25.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$624**
123638	24.3 to 25.3 feet	**Vertical Change**	.66"	4 ft	4	REF		
123639	27.6 to 28.6 feet	**Vertical Change**	.77"	4 ft	4	REF		
123642	28.0 to 29.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
123643	34.0 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	43	SF	$120	**$5,184**

TOTAL COST FOR: S *side of* **LACRETA AVE** *Starting at:* **1216 LACRETA AVE** **$8,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071534	LACRETA AVE	1601 LACRETA AVE	JERICHO DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124705	0.3 to 2.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
124706	5.1 to 10.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
124729	10.6 to 24.6 feet	Key Note Segment		5 ft	70			
124693	11.9 to 12.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
124707	24.6 to 66.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	211	SF	$40	**$8,440**
124694	30.4 to 31.4 feet	**Vertical Change**	3.21"	5 ft	5	REF		
124708	73.6 to 74.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
124709	74.7 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
124695	76.8 to 77.8 feet	**Vertical Change**	.6"	5 ft	5	REF		
124696	79.6 to 80.6 feet	**Vertical Change**	1.18"	5 ft	5	REF		
124730	81.4 to 95.3 feet	Key Note Segment		5 ft	69			
124710	95.3 to 104.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	45	SF	$40	**$1,780**
124731	106.6 to 120.3 feet	Key Note Segment		5 ft	69			
124697	107.1 to 108.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
124711	121.0 to 138.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
124712	143.8 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,700**
124732	176.6 to 189.8 feet	Key Note Segment		5 ft	66			
124698	180.8 to 181.8 feet	**Vertical Change**	-.84"	5 ft	5	REF		
124713	193.0 to 201.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
124714	201.8 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124733	203.8 to 217.9 feet	Key Note Segment		5 ft	71			
124715	222.1 to 243.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
124716	244.3 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
124717	256.8 to 270.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,460**
124734	272.4 to 285.9 feet	Key Note Segment		5 ft	68			
124718	285.9 to 288.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
124699	287.3 to 288.3 feet	**Vertical Change**	3.49"	5 ft	5	REF		
124719	289.6 to 293.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071534	LACRETA AVE	1601 LACRETA AVE	JERICHO DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124720	294.8 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124735	297.1 to 311.3 feet	Key Note Segment		5 ft	71			
124721	311.3 to 317.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
124738	319.5 to 320.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124722	321.6 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
124700	327.8 to 328.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
124701	331.3 to 332.3 feet	**Vertical Change**	.73"	5 ft	5	REF		
124702	336.7 to 337.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
124723	340.3 to 351.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
124703	346.4 to 347.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
124724	355.9 to 366.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
124736	367.8 to 381.8 feet	Key Note Segment		5 ft	70			
124725	381.8 to 392.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	53	SF	$40	**$2,100**
124726	392.3 to 393.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
124737	393.6 to 406.5 feet	Key Note Segment		5 ft	65			
124727	408.1 to 414.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
124728	414.6 to 426.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
124704	427.3 to 428.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **LACRETA AVE** *Starting at:* **1601 LACRETA AVE** **$123,154.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071301	LACRETA AVE	AMY AVE	MERCED ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123586	5.9 to 21.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
123600	21.1 to 34.5 feet	Key Note Segment		5 ft	67			
123587	36.3 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
123601	47.5 to 60.7 feet	Key Note Segment		5 ft	66			
123588	61.3 to 74.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,580**
123576	61.7 to 62.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
123589	77.3 to 107.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	152	SF	$120	**$18,240**
123578	100.8 to 101.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
123590	110.0 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
123602	124.8 to 138.3 feet	Key Note Segment		5 ft	68			
123579	128.8 to 129.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
123591	138.7 to 142.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
123592	144.1 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
123580	146.1 to 147.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
123603	150.8 to 163.5 feet	Key Note Segment		5 ft	63			
123581	151.2 to 152.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
123593	164.4 to 167.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
123594	168.3 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
123582	174.7 to 175.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
123583	187.4 to 188.4 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
123604	201.9 to 215.9 feet	Key Note Segment		5 ft	70			
123584	202.9 to 203.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
123595	215.9 to 219.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$680**
123596	220.6 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
123585	230.8 to 231.8 feet	**Vertical Change**	-.79"	5 ft	5	REF		
123597	231.6 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
123598	236.2 to 238.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
123605	237.4 to 238.4 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071301	LACRETA AVE	AMY AVE	MERCED ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123599	241.9 to 250.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: N *side of* **LACRETA AVE** *Starting at:* **AMY AVE** **$63,929.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071541	LACRETA AVE	JERICHO DR	AMY AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124759	0.0 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
124800	28.2 to 42.7 feet	Key Note Segment		5 ft	73			
124760	42.7 to 49.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,360**
124761	51.8 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
124801	85.3 to 99.3 feet	Key Note Segment		5 ft	70			
124739	97.5 to 98.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
124762	99.3 to 102.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$700**
124763	102.8 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
124802	112.6 to 125.8 feet	Key Note Segment		5 ft	66			
124764	126.1 to 129.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
124740	127.2 to 128.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
124765	132.3 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
124766	144.5 to 155.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
124767	155.1 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
124768	162.8 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
124741	178.1 to 179.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
124817	189.8 to 190.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124803	196.2 to 210.0 feet	Key Note Segment		5 ft	69			
124742	210.9 to 211.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
124769	213.3 to 229.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
124743	221.1 to 222.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
124804	229.9 to 244.1 feet	Key Note Segment		5 ft	71			
124744	233.5 to 234.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
124770	244.1 to 253.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	47	SF	$40	**$1,880**
124771	253.5 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
124772	290.1 to 307.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
124805	308.3 to 322.4 feet	Key Note Segment		5 ft	70			
124773	322.9 to 325.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071541	LACRETA AVE	JERICHO DR	AMY AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124774	328.3 to 334.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
124806	334.3 to 348.4 feet	Key Note Segment		5 ft	71			
124745	335.5 to 336.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
124746	342.5 to 343.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
124775	349.5 to 369.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
124776	373.0 to 374.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
124777	374.6 to 402.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
124747	395.4 to 396.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
124807	403.1 to 416.9 feet	Key Note Segment		5 ft	69			
124778	422.3 to 429.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
124808	429.1 to 443.2 feet	Key Note Segment		5 ft	71			
124779	443.2 to 448.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,060**
124780	449.8 to 456.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
124748	457.1 to 458.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
124749	469.9 to 470.9 feet	**Vertical Change**	-.62"	5 ft	5	REF		
124781	470.1 to 492.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
124782	495.1 to 496.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
124809	497.2 to 510.9 feet	Key Note Segment		5 ft	69			
124783	510.9 to 512.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
124750	511.8 to 512.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
124784	515.1 to 522.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
124810	522.8 to 536.4 feet	Key Note Segment		5 ft	68			
124751	537.4 to 538.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
124785	537.7 to 564.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
124786	569.5 to 571.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
124787	574.3 to 575.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
124788	579.2 to 588.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
124811	590.9 to 604.9 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071541	LACRETA AVE	JERICHO DR	AMY AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124812	616.7 to 630.5 feet	Key Note Segment		5 ft	69			
124789	631.7 to 633.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
124754	664.9 to 665.9 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
124813	685.0 to 698.3 feet	Key Note Segment		5 ft	67			
124790	699.6 to 700.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
124755	706.5 to 707.5 feet	**Vertical Change**	3.27"	5 ft	5	SF	$75	**$375**
124814	710.8 to 724.8 feet	Key Note Segment		5 ft	70			
124791	726.3 to 730.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
124792	730.2 to 737.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
124818	730.8 to 731.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124793	739.4 to 748.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
124794	752.2 to 769.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
124795	774.4 to 779.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
124815	779.3 to 792.9 feet	Key Note Segment		5 ft	68			
124796	792.9 to 795.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
124797	796.9 to 804.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
124816	804.8 to 818.3 feet	Key Note Segment		5 ft	68			
124756	806.0 to 807.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
124757	813.0 to 814.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
124798	821.2 to 840.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
124758	832.5 to 833.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
124799	840.7 to 842.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N *side of* **LACRETA AVE** *Starting at:* **JERICHO DR** **$231,258.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071527	LACRETA AVE	JERICHO DR	MADISON DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124649	0.0 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
124650	2.4 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
124672	2.6 to 3.6 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
124635	12.7 to 13.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
124651	17.2 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
124666	24.2 to 43.5 feet	Key Note Segment		5 ft	97			
124636	25.1 to 26.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
124637	43.8 to 44.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
124652	47.2 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
124638	51.5 to 52.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124667	51.6 to 70.4 feet	Key Note Segment		5 ft	94			
124639	70.3 to 71.3 feet	**Vertical Change**	-1.51"	5 ft	5	REF		
124653	70.8 to 113.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	**$25,680**
124640	90.7 to 91.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
124654	113.9 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
124668	127.6 to 146.8 feet	Key Note Segment		5 ft	96			
124641	147.0 to 148.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
124655	149.8 to 153.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
124669	155.0 to 173.7 feet	Key Note Segment		5 ft	94			
124642	155.3 to 156.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
124656	173.8 to 175.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	11	SF	$40	**$420**
124657	176.9 to 229.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	262	SF	$120	**$31,440**
124670	230.8 to 250.0 feet	Key Note Segment		5 ft	96			
124643	241.3 to 242.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
124644	250.7 to 251.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
124658	252.3 to 257.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
124671	257.8 to 276.6 feet	Key Note Segment		5 ft	94			
124645	258.3 to 259.3 feet	**Vertical Change**	.52"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071527	LACRETA AVE	JERICHO DR	MADISON DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124646	277.5 to 278.5 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
124659	280.8 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,300**
124660	310.3 to 312.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
124661	315.6 to 337.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,140**
124662	337.8 to 342.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
124663	343.3 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
124664	366.5 to 373.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
124647	368.8 to 369.8 feet	Vertical Change	.6"	5 ft	5	REF		
124665	376.5 to 385.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
124648	385.2 to 386.2 feet	Vertical Change	.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **LACRETA AVE** *Starting at:* **JERICHO DR** **$137,859.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071459	LACRETA AVE	JESSE DR	DOMINGUEZ DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124451	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
124452	10.7 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
124438	12.4 to 13.4 feet	**Vertical Change**	-.4"	4 ft	4	LF	$75	**$300**
124471	19.3 to 36.2 feet	Key Note Segment		4 ft	68			
124439	36.4 to 37.4 feet	**Vertical Change**	.26"	4 ft	4	REF		
124472	46.3 to 63.9 feet	Key Note Segment		4 ft	70			
124440	47.9 to 48.9 feet	**Vertical Change**	.29"	4 ft	4	REF		
124441	57.1 to 58.1 feet	**Vertical Change**	-.27"	4 ft	4	REF		
124453	66.1 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
124454	75.4 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
124455	109.1 to 123.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$7,008**
124473	124.4 to 142.4 feet	Key Note Segment		4 ft	72			
124456	145.1 to 150.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	21	SF	$120	**$2,496**
124480	147.4 to 148.4 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
124442	152.7 to 156.2 feet	**Vertical Change**	-.31"	4 ft	14	REF		
124457	153.1 to 154.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
124443	159.7 to 160.7 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
124458	164.4 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
124474	176.5 to 193.8 feet	Key Note Segment		4 ft	69			
124459	198.0 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
124460	212.3 to 227.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	62	SF	$120	**$7,440**
124475	228.3 to 246.5 feet	Key Note Segment		4 ft	73			
124445	232.4 to 233.4 feet	**Vertical Change**	.39"	4 ft	4	REF		
124461	249.4 to 280.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	124	SF	$120	**$14,880**
124476	280.4 to 298.3 feet	Key Note Segment		4 ft	72			
124462	303.5 to 311.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,984**
124463	314.9 to 316.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
124464	316.5 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,344**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071459	LACRETA AVE	JESSE DR	DOMINGUEZ DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124477	331.8 to 349.8 feet	Key Note Segment		4 ft	72			
124446	346.6 to 347.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
124465	353.4 to 356.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
124466	357.0 to 358.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
124478	358.7 to 375.9 feet	Key Note Segment		4 ft	69			
124447	379.0 to 380.0 feet	**Vertical Change**	.33"	4 ft	4	REF		
124467	379.1 to 380.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
124468	382.5 to 410.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	112	SF	$120	**$13,440**
124448	402.9 to 403.9 feet	**Vertical Change**	-.5"	4 ft	4	REF		
124479	410.5 to 429.8 feet	Key Note Segment		4 ft	77			
124449	430.2 to 431.2 feet	**Vertical Change**	-.27"	4 ft	4	REF		
124469	433.0 to 443.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	41	SF	$120	**$4,944**
124470	443.5 to 451.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
124450	454.8 to 455.8 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **LACRETA AVE** *Starting at:* **JESSE DR** **$87,591.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071530	LACRETA AVE	MADISON DR	1611 LACRETA AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124677	0.0 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
124678	3.5 to 22.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
124679	23.3 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
124691	29.3 to 30.3 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
124680	33.7 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
124681	42.1 to 45.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
124682	48.3 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
124673	49.8 to 50.8 feet	**Vertical Change**	1.15"	5 ft	5	REF		
124692	69.8 to 70.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124683	71.0 to 88.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
124684	92.3 to 102.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
124689	103.3 to 117.4 feet	Key Note Segment		5 ft	71			
124674	111.7 to 112.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
124685	117.4 to 129.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	61	SF	$40	**$2,420**
124690	130.8 to 144.8 feet	Key Note Segment		5 ft	70			
124675	138.9 to 139.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
124686	146.5 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
124676	151.4 to 152.4 feet	**Vertical Change**	.94"	5 ft	5	REF		
124687	166.6 to 170.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
124688	174.8 to 203.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,460**

TOTAL COST FOR: N *side of* **LACRETA AVE** *Starting at:* **MADISON DR** **$83,558.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071305	LACRETA AVE	MERCED ST	1212 LACRETA AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123612	8.6 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
123613	15.6 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
123626	23.3 to 40.3 feet	Key Note Segment		4 ft	68			
123606	39.2 to 40.2 feet	**Vertical Change**	1.11"	4 ft	4	REF		
123614	46.0 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
123615	52.6 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
123616	62.3 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
123627	75.9 to 93.3 feet	Key Note Segment		4 ft	70			
123635	93.3 to 94.3 feet		5.0-6.0%	4 ft	4			
123607	93.4 to 94.4 feet	**Vertical Change**	-.29"	4 ft	4	REF		
123628	101.9 to 119.7 feet	Key Note Segment		4 ft	71			
123617	133.6 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
123618	141.1 to 148.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,648**
123632	146.3 to 147.3 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
123608	147.0 to 148.0 feet	**Vertical Change**	-.27"	4 ft	4	REF		
123619	167.3 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
123629	179.8 to 196.8 feet	Key Note Segment		4 ft	68			
123609	180.9 to 181.9 feet	**Vertical Change**	.31"	4 ft	4	REF		
123620	200.3 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
123636	201.6 to 202.6 feet	**Continuous Width**	24"	4 ft	4	SF	$120	**$480**
123621	206.4 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
123633	210.5 to 211.5 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
123622	216.3 to 218.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
123623	219.4 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
123634	220.5 to 221.5 feet	**Protruding Object**	48"	4 ft	4	JOB	$99	**$99**
123630	232.1 to 249.5 feet	Key Note Segment		4 ft	70			
123610	268.2 to 269.2 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
123624	272.8 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071305	LACRETA AVE	MERCED ST	1212 LACRETA AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123631	283.9 to 301.3 feet	Key Note Segment		4 ft	70			
123625	304.8 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	130	SF	$120	**$15,600**
123611	320.6 to 321.6 feet	**Vertical Change**	.37"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **LACRETA AVE** *Starting at:* **MERCED ST** **$52,533.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071513	LACRETA AVE	SANARITA WY	JERICHO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124544	2.3 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
124534	14.0 to 15.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
124545	15.3 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
124546	19.8 to 26.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
124562	26.8 to 46.8 feet	Key Note Segment		5 ft	100			
124535	37.2 to 38.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
124536	46.8 to 47.8 feet	**Vertical Change**	-.46"	5 ft	5	REF		
124547	49.3 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
124563	53.3 to 72.6 feet	Key Note Segment		5 ft	96			
124537	63.8 to 64.8 feet	**Vertical Change**	-.43"	5 ft	5	REF		
124548	74.8 to 84.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
124549	85.0 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
124550	96.3 to 120.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
124538	110.2 to 111.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
124551	122.4 to 134.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
124564	135.3 to 155.3 feet	Key Note Segment		5 ft	100			
124539	145.8 to 146.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
124552	157.0 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
124565	162.1 to 181.3 feet	Key Note Segment		5 ft	96			
124540	182.0 to 183.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
124553	183.3 to 214.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,480**
124554	214.8 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
124555	221.4 to 243.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**
124566	243.3 to 263.3 feet	Key Note Segment		5 ft	100			
124541	244.8 to 245.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
124556	264.8 to 270.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
124567	270.7 to 289.8 feet	Key Note Segment		5 ft	96			
124557	291.7 to 326.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071513	LACRETA AVE	SANARITA WY	JERICHO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124558	327.6 to 349.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,900**
124568	352.0 to 372.3 feet	Key Note Segment		5 ft	102			
124559	373.6 to 378.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
124542	378.2 to 379.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
124569	379.2 to 398.6 feet	Key Note Segment		5 ft	97			
124543	399.1 to 400.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
124560	401.4 to 402.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
124561	403.9 to 426.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**

TOTAL COST FOR: S *side of* **LACRETA AVE** *Starting at:* **SANARITA WY** **$140,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091137	LAGUNA WAY	1121 LAGUNA WAY	1192 LAGUNA WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128710	0.0 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
128734	4.0 to 16.3 feet	Key Note Segment		5 ft	62			
128711	28.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
128735	32.8 to 46.8 feet	Key Note Segment		5 ft	70			
128697	33.4 to 34.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
128712	48.9 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
128736	53.3 to 68.7 feet	Key Note Segment		5 ft	77			
128713	68.7 to 78.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
128698	80.4 to 81.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
128714	81.1 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
128715	85.8 to 88.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
128699	87.3 to 88.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
128737	88.6 to 103.7 feet	Key Note Segment		5 ft	76			
128716	109.6 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
128700	116.1 to 117.1 feet	**Vertical Change**	1.59"	5 ft	5	REF		
128738	119.5 to 131.5 feet	Key Note Segment		5 ft	60			
128701	126.7 to 127.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
128717	131.9 to 136.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	22	SF	$40	**$880**
128718	138.5 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
128719	142.3 to 148.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
128702	151.4 to 152.4 feet	**Vertical Change**	.51"	5 ft	5	REF		
128720	151.8 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,900**
128739	178.3 to 192.4 feet	Key Note Segment		5 ft	71			
128721	192.7 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
128740	205.3 to 218.7 feet	Key Note Segment		5 ft	67			
128722	219.0 to 242.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	118	SF	$40	**$4,700**
128703	219.6 to 220.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
128723	247.1 to 249.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091137	LAGUNA WAY	1121 LAGUNA WAY	1192 LAGUNA WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128724	251.8 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
128725	260.0 to 262.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
128745	262.3 to 263.3 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
128741	265.0 to 278.8 feet	Key Note Segment		5 ft	69			
128726	278.8 to 290.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
128742	291.0 to 304.5 feet	Key Note Segment		5 ft	68			
128704	291.8 to 292.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
128727	308.0 to 336.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
128705	323.9 to 324.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
128728	337.2 to 343.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
128729	345.1 to 351.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
128743	351.2 to 365.0 feet	Key Note Segment		5 ft	69			
128730	368.9 to 377.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
128744	378.1 to 391.2 feet	Key Note Segment		5 ft	66			
128706	378.8 to 379.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
128707	385.4 to 386.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
128731	392.4 to 402.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
128732	403.8 to 436.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,380**
128708	416.8 to 417.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
128709	429.8 to 430.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
128733	436.3 to 445.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: S *side of* **LAGUNA WAY** *Starting at:* **1121 LAGUNA WAY** **$123,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091133	LAGUNA WAY	1191 LAGUNA WAY	1121 LAGUNA WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128663	0.9 to 5.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
128664	7.3 to 16.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
128665	17.7 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
128666	34.5 to 43.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
128667	43.9 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
128688	46.0 to 60.0 feet	Key Note Segment		5 ft	70			
128649	53.3 to 54.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
128668	61.0 to 63.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
128650	61.1 to 62.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
128669	63.8 to 72.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
128689	72.3 to 87.3 feet	Key Note Segment		5 ft	75			
128651	73.4 to 74.4 feet	**Vertical Change**	-.41"	5 ft	5	REF		
128670	87.3 to 102.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	74	SF	$40	**$2,940**
128652	87.5 to 88.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
128653	94.0 to 95.0 feet	**Vertical Change**	.64"	5 ft	5	REF		
128654	100.3 to 101.3 feet	**Vertical Change**	.55"	5 ft	5	REF		
128671	104.3 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
128672	111.6 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
128655	116.4 to 117.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
128673	128.1 to 134.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,660**
128656	133.9 to 134.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
128690	134.2 to 147.2 feet	Key Note Segment		5 ft	65			
128674	147.2 to 151.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	23	SF	$40	**$920**
128675	154.3 to 161.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$4,020**
128691	161.5 to 172.9 feet	Key Note Segment		5 ft	57			
128676	174.8 to 176.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
128677	180.1 to 182.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
128678	183.3 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091133	LAGUNA WAY	1191 LAGUNA WAY	1121 LAGUNA WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128657	205.4 to 206.4 feet	Vertical Change	.37"	5 ft	5	REF		
128692	219.3 to 233.7 feet	Key Note Segment		5 ft	72			
128679	234.8 to 243.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
128658	235.6 to 236.6 feet	Vertical Change	-.36"	5 ft	5	REF		
128693	244.5 to 258.8 feet	Key Note Segment		5 ft	72			
128680	259.3 to 265.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	**$1,180**
128681	270.8 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
128659	280.4 to 281.4 feet	Vertical Change	.4"	5 ft	5	REF		
128682	280.7 to 303.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
128660	291.5 to 292.5 feet	Vertical Change	-.26"	5 ft	5	REF		
128661	296.6 to 297.6 feet	Vertical Change	.49"	5 ft	5	REF		
128694	305.3 to 319.4 feet	Key Note Segment		5 ft	70			
128683	319.4 to 332.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	65	SF	$40	**$2,600**
128695	333.0 to 346.8 feet	Key Note Segment		5 ft	69			
128684	346.9 to 350.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	**$660**
128685	354.9 to 361.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
128686	367.3 to 382.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
128696	382.6 to 396.9 feet	Key Note Segment		5 ft	72			
128662	384.6 to 385.6 feet	Vertical Change	1.78"	5 ft	5	REF		
128687	401.5 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **1191 LAGUNA WAY** **$120,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128817	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
128818	4.4 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
128878	6.3 to 19.8 feet	Key Note Segment		5 ft	68			
128819	19.8 to 33.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	70	SF	$40	**$2,780**
128820	38.5 to 71.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,620**
128746	56.0 to 59.1 feet	**Vertical Change**	-.3"	5 ft	16	REF		
128747	65.2 to 66.2 feet	**Vertical Change**	-.48"	5 ft	5	REF		
128821	74.8 to 77.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
128748	76.0 to 77.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
128749	80.2 to 81.2 feet	**Vertical Change**	-.53"	5 ft	5	REF		
128822	80.7 to 83.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
128750	82.3 to 83.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
128879	84.1 to 98.2 feet	Key Note Segment		5 ft	71			
128751	94.8 to 95.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
128752	99.3 to 100.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
128823	99.7 to 102.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
128824	103.6 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
128880	111.5 to 124.9 feet	Key Note Segment		5 ft	67			
128754	123.6 to 124.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
128825	124.9 to 134.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
128755	129.5 to 130.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
128826	134.8 to 158.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,220**
128756	150.6 to 151.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
128827	161.1 to 178.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
128757	168.4 to 169.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
128828	180.6 to 190.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
128881	190.9 to 205.1 feet	Key Note Segment		5 ft	71			
128760	198.3 to 199.3 feet	**Vertical Change**	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128829	205.9 to 216.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
128763	215.7 to 216.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
128882	217.3 to 230.2 feet	Key Note Segment		5 ft	65			
128830	231.3 to 239.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
128764	232.2 to 233.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
128831	243.3 to 247.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
128832	247.3 to 264.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,500**
128765	252.5 to 253.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
128833	269.4 to 270.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
128834	273.6 to 295.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,140**
128766	278.4 to 281.8 feet	**Vertical Change**	-.29"	5 ft	17	REF		
128767	282.9 to 283.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
128768	284.9 to 285.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
128769	293.3 to 296.5 feet	**Vertical Change**	-.38"	5 ft	16	REF		
128883	296.2 to 309.9 feet	Key Note Segment		5 ft	68			
128770	299.6 to 300.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
128771	307.9 to 308.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
128772	309.7 to 310.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
128835	311.2 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
128836	315.4 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
128837	319.6 to 321.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
128773	322.2 to 325.3 feet	**Vertical Change**	.27"	5 ft	16	LF	$75	**$1,163**
128884	322.8 to 337.0 feet	Key Note Segment		5 ft	71			
128838	339.3 to 345.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
128897	340.1 to 341.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
128839	345.0 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
128775	349.9 to 350.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
128776	367.2 to 368.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128840	370.3 to 382.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
128777	375.8 to 376.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
128778	382.2 to 385.3 feet	**Vertical Change**	-.31"	5 ft	16	REF		
128841	383.3 to 397.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
128779	388.7 to 389.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
128780	395.1 to 396.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
128885	402.1 to 415.4 feet	Key Note Segment		5 ft	67			
128781	403.8 to 404.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
128782	405.9 to 406.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
128783	410.3 to 411.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
128842	415.8 to 427.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
128784	418.6 to 419.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
128785	423.2 to 424.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
128843	427.3 to 428.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
128886	428.7 to 441.7 feet	Key Note Segment		5 ft	65			
128786	442.0 to 443.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
128844	445.5 to 452.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
128845	456.3 to 461.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
128846	461.3 to 480.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
128847	488.2 to 507.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
128787	498.2 to 499.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
128887	507.4 to 521.8 feet	Key Note Segment		5 ft	72			
128888	534.1 to 547.8 feet	Key Note Segment		5 ft	68			
128788	543.5 to 544.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
128848	551.2 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
128789	559.1 to 560.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
128849	566.7 to 568.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
128790	569.6 to 570.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128850	570.8 to 598.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
128791	582.8 to 583.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
128851	601.3 to 609.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
128889	614.3 to 627.5 feet	Key Note Segment		5 ft	66			
128792	620.0 to 621.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
128794	626.1 to 627.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
128852	627.5 to 629.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
128853	629.4 to 639.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
128795	639.3 to 640.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
128890	640.1 to 653.8 feet	Key Note Segment		5 ft	68			
128796	647.9 to 651.1 feet	**Vertical Change**	.42"	5 ft	16	REF		
128797	652.1 to 653.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
128854	657.0 to 669.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
128798	658.5 to 659.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
128855	672.8 to 681.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
128799	682.0 to 683.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
128856	685.4 to 704.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
128800	703.9 to 704.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
128801	706.0 to 707.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
128857	707.1 to 715.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
128802	708.1 to 711.1 feet	**Vertical Change**	.29"	5 ft	15	REF		
128891	718.8 to 734.4 feet	Key Note Segment		5 ft	78			
128803	732.3 to 733.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
128804	735.5 to 736.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
128858	737.7 to 740.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
128859	743.6 to 745.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
128892	745.3 to 759.8 feet	Key Note Segment		5 ft	73			
128860	762.3 to 783.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128861	787.7 to 797.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
128862	804.8 to 807.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
128863	810.1 to 818.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
128864	821.7 to 823.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
128893	825.3 to 839.3 feet	Key Note Segment		5 ft	70			
128805	831.1 to 832.1 feet	Vertical Change	.26"	5 ft	5	REF		
128806	839.3 to 840.3 feet	Vertical Change	.34"	5 ft	5	REF		
128865	840.3 to 851.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
128894	851.3 to 865.5 feet	Key Note Segment		5 ft	71			
128866	866.0 to 867.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$260
128808	869.3 to 870.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
128867	872.7 to 879.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
128868	881.8 to 885.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
128809	885.5 to 886.5 feet	Vertical Change	-.26"	5 ft	5	REF		
128869	888.2 to 896.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
128810	896.1 to 897.1 feet	Vertical Change	-.34"	5 ft	5	REF		
128870	901.3 to 917.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,840
128811	911.2 to 912.2 feet	Vertical Change	-.3"	5 ft	5	REF		
128871	921.3 to 930.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
128812	930.5 to 931.5 feet	Vertical Change	.28"	5 ft	5	REF		
128895	931.9 to 944.8 feet	Key Note Segment		5 ft	65			
128872	949.2 to 951.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
128873	951.5 to 953.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
128814	954.6 to 955.6 feet	Vertical Change	.55"	5 ft	5	SF	$75	$375
128874	955.7 to 956.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
128896	957.8 to 972.1 feet	Key Note Segment		5 ft	72			
128815	962.8 to 963.8 feet	Vertical Change	.29"	5 ft	5	REF		
128816	969.1 to 970.1 feet	Vertical Change	.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091146	LAGUNA WAY	1198 LAGUNA WAY	RAYMOND RD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128875	982.7 to 989.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
128876	998.3 to 1011.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
128877	1015.7 to 1016.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **LAGUNA WAY** *Starting at:* **1198 LAGUNA WAY** **$327,911.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091151	LAGUNA WAY	1375 LAGUNA WAY	SAN SEBASTIAN WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128906	3.4 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
128898	7.6 to 8.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
128899	9.6 to 10.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
128918	20.3 to 35.5 feet	Key Note Segment		5 ft	76			
128900	26.7 to 27.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
128907	36.1 to 41.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
128919	48.5 to 62.1 feet	Key Note Segment		5 ft	68			
128908	64.1 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
128909	68.3 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
128910	76.8 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
128911	88.5 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
128920	92.4 to 93.4 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
128912	109.3 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
128904	123.8 to 124.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
128913	124.3 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
128914	140.3 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
128915	144.9 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
128916	149.0 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
128917	159.4 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
128905	167.6 to 168.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **1375 LAGUNA WAY** **$45,914.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091157	LAGUNA WAY	ALICANTE WAY	BARCELONA WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128959	7.8 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
128960	13.1 to 15.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
128961	17.3 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
128962	19.8 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
128963	26.3 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
128964	49.8 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
128965	68.3 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
128966	98.5 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
128967	104.8 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
128968	125.3 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
128958	152.0 to 153.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **ALICANTE WAY** **$39,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091128	LAGUNA WAY	BARCELONA WAY	1197 LAGUNA WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128636	0.6 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
128637	3.4 to 7.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
128635	3.9 to 4.9 feet	**Vertical Change**	3.12"	5 ft	5	REF		
128638	7.4 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
128639	15.3 to 37.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,560**
128640	40.7 to 48.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
128641	48.9 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
128642	58.4 to 76.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
128643	80.3 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
128644	91.6 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
128645	97.4 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
128648	106.8 to 120.7 feet	Key Note Segment		5 ft	70			
128646	121.3 to 123.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
128647	126.3 to 130.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **BARCELONA WAY** **$56,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091153	LAGUNA WAY	SAN SEBASTIAN WAY	TOLUCA	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128926	2.7 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,060**
128921	4.8 to 5.8 feet	**Vertical Change**	.93"	5 ft	5	REF		
128927	37.1 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
128928	53.3 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
128922	59.4 to 60.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
128929	60.4 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
128923	74.4 to 75.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
128930	79.6 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
128924	87.0 to 88.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
128931	92.3 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
128932	97.0 to 98.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
128933	100.9 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
128934	104.3 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
128935	112.5 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
128936	118.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
128925	118.5 to 119.5 feet	**Vertical Change**	.72"	5 ft	5	REF		
128937	135.5 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
128938	144.3 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **SAN SEBASTIAN WAY** **$54,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091155	LAGUNA WAY	TOLUCA	ALICANTE WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128943	0.3 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
128944	10.8 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
128945	21.5 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
128946	30.9 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
128947	38.9 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
128948	63.0 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
128939	66.4 to 67.4 feet	**Vertical Change**	.87"	5 ft	5	REF		
128949	66.5 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
128950	77.0 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
128951	81.3 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
128952	87.9 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
128953	94.5 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
128954	104.8 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
128940	138.4 to 139.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
128941	143.8 to 144.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
128955	146.0 to 147.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
128942	147.0 to 148.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **LAGUNA WAY** *Starting at:* **TOLUCA** **$65,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261543	LARRETE AVE	FAIRFIELD WAY	FAIRWAY AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110182	0.0 to 29.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,700**
110156	20.5 to 21.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
110203	29.9 to 57.7 feet	Key Note Segment		5 ft	139			
110157	40.2 to 41.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
110158	48.9 to 49.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
110159	56.8 to 57.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
110183	60.7 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
110160	73.0 to 74.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
110204	74.6 to 102.5 feet	Key Note Segment		5 ft	140			
110161	77.2 to 78.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
110162	100.9 to 101.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
110184	104.8 to 109.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
110185	109.8 to 145.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	178	SF	$120	**$21,300**
110205	145.3 to 174.2 feet	Key Note Segment		5 ft	144			
110163	148.6 to 149.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
110164	156.5 to 157.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
110165	172.3 to 173.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
110186	176.4 to 181.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
110187	181.6 to 186.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
110188	190.0 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
110166	200.2 to 201.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
110189	203.0 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
110167	210.8 to 211.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110206	217.3 to 252.8 feet	Key Note Segment		5 ft	178			
110168	221.2 to 222.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
110169	228.3 to 229.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110170	253.7 to 254.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
110190	254.5 to 287.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261543	LARRETE AVE	FAIRFIELD WAY	FAIRWAY AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110171	288.8 to 289.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
110207	288.9 to 324.8 feet	Key Note Segment		5 ft	180			
110172	308.5 to 309.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110173	315.6 to 316.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
110174	322.4 to 323.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
110191	326.6 to 362.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,300**
110208	363.5 to 391.3 feet	Key Note Segment		5 ft	139			
110175	365.6 to 366.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110176	372.6 to 373.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
110192	393.0 to 400.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
110193	404.3 to 405.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
110194	416.1 to 417.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
110195	420.3 to 429.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
110177	423.8 to 424.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110209	430.8 to 460.8 feet	Key Note Segment		5 ft	150			
110178	442.6 to 443.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
110179	457.0 to 458.0 feet	**Vertical Change**	1.2"	5 ft	5	REF		
110196	461.6 to 464.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
110197	464.7 to 469.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
110198	472.6 to 480.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
110199	483.2 to 496.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
110210	499.4 to 526.9 feet	Key Note Segment		5 ft	138			
110180	502.7 to 503.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
110181	528.2 to 529.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
110200	529.2 to 538.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
110201	540.9 to 556.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
110202	556.2 to 565.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**

TOTAL COST FOR: E *side of* **LARRETE AVE** *Starting at:* **FAIRFIELD WAY** **$161,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261548	LARRETE AVE	FAIRWAY AVE	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110229	1.6 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
110230	9.3 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
110231	14.4 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
110232	28.8 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
110233	38.0 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
110234	51.8 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
110249	61.7 to 97.3 feet	Key Note Segment		5 ft	178			
110235	98.0 to 99.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
110236	101.3 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
110237	131.1 to 167.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
110250	167.9 to 193.8 feet	Key Note Segment		5 ft	130			
110211	192.3 to 193.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110238	200.7 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
110212	202.0 to 203.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
110251	214.1 to 245.0 feet	Key Note Segment		5 ft	155			
110213	215.3 to 216.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
110214	242.8 to 243.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110239	245.3 to 246.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
110240	249.3 to 257.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
110215	259.4 to 260.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
110241	260.1 to 282.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,500**
110252	285.6 to 316.3 feet	Key Note Segment		5 ft	153			
110217	316.8 to 317.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
110242	318.9 to 321.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
110243	322.2 to 369.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	235	SF	$120	**$28,140**
110244	369.3 to 388.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
110253	388.6 to 417.8 feet	Key Note Segment		5 ft	146			
110218	389.8 to 390.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261548	LARRETE AVE	FAIRWAY AVE	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110220	406.8 to 407.8 feet	Vertical Change	.29"	5 ft	5	REF		
110221	415.3 to 416.3 feet	Vertical Change	.26"	5 ft	5	REF		
110222	418.5 to 419.5 feet	Vertical Change	.29"	5 ft	5	REF		
110245	418.8 to 424.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
110246	424.8 to 427.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
110254	427.8 to 458.7 feet	Key Note Segment		5 ft	155			
110223	430.4 to 431.4 feet	Vertical Change	.28"	5 ft	5	REF		
110224	447.3 to 448.3 feet	Vertical Change	.3"	5 ft	5	REF		
110225	457.7 to 458.7 feet	Vertical Change	.33"	5 ft	5	REF		
110247	463.0 to 504.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	210	SF	$120	**$25,140**
110226	471.7 to 472.7 feet	Vertical Change	-.27"	5 ft	5	REF		
110255	505.5 to 534.4 feet	Key Note Segment		5 ft	145			
110227	517.6 to 518.6 feet	Vertical Change	.36"	5 ft	5	REF		
110228	531.8 to 532.8 feet	Vertical Change	.3"	5 ft	5	REF		
110248	534.6 to 565.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	152	SF	$120	**$18,240**

TOTAL COST FOR: W *side of* **LARRETE AVE** *Starting at:* **FAIRWAY AVE** **$169,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108130923	LAS CASAS LN	1070 LAS CASAS LN	LAS FRESAS WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61186	1.1 to 2.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
61187	4.2 to 6.7 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	13	SF	$120	**$1,500**
61188	7.8 to 15.3 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	38	SF	$120	**$4,500**
61189	18.8 to 31.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,380**
61190	31.1 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
61191	35.9 to 39.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: S *side of* **LAS CASAS LN** *Starting at:* **1070 LAS CASAS LN** **$19,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108130918	LAS CASAS LN	963 LAS CASAS LN	VARBELLA PK	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61155	1.1 to 2.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$600**
61156	3.0 to 10.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	37	SF	$120	**$4,380**
61157	10.6 to 15.6 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	25	SF	$120	**$3,000**
61158	22.5 to 34.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
61159	38.1 to 40.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **LAS CASAS LN** *Starting at:* **963 LAS CASAS LN** **$16,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108130917	LAS CASAS LN	LAS FRESAS WAY	983 LAS CASAS LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61136	0.0 to 5.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
61137	8.3 to 13.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
61138	14.2 to 18.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
61139	18.5 to 24.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
61150	24.7 to 44.3 feet	Key Note Segment		5 ft	98			
61140	45.7 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
61151	51.2 to 70.3 feet	Key Note Segment		5 ft	96			
61141	71.5 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
61142	94.6 to 102.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
61143	103.0 to 107.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
61144	108.4 to 120.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
61152	120.8 to 140.8 feet	Key Note Segment		5 ft	100			
61145	140.9 to 142.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	8	SF	$40	**$320**
61146	142.5 to 147.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
61153	147.3 to 166.9 feet	Key Note Segment		5 ft	98			
61147	167.8 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
61148	173.5 to 195.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,200**
61135	184.4 to 185.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
61149	195.5 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
61154	221.4 to 241.5 feet	Key Note Segment		5 ft	101			

TOTAL COST FOR: N *side of* **LAS CASAS LN** *Starting at:* **LAS FRESAS WAY** **$75,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108130922	LAS CASAS LN	VARBELLA PK	1052 LAS CASAS LN	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61164	0.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
61165	6.4 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
61166	10.5 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
61181	20.3 to 40.3 feet	Key Note Segment		5 ft	100			
61167	43.4 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
61160	43.6 to 44.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
61182	48.6 to 68.4 feet	Key Note Segment		5 ft	99			
61161	68.0 to 69.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
61168	73.5 to 81.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
61162	80.3 to 81.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
61169	82.2 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
61163	107.5 to 108.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
61170	111.2 to 119.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
61183	119.7 to 139.2 feet	Key Note Segment		5 ft	97			
61171	142.4 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61172	146.0 to 147.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
61184	147.7 to 167.6 feet	Key Note Segment		5 ft	100			
61173	168.6 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
61174	175.2 to 178.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
61175	181.0 to 183.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
61176	186.7 to 193.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
61177	195.0 to 200.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
61178	201.7 to 205.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
61179	208.1 to 220.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
61185	220.8 to 241.1 feet	Key Note Segment		5 ft	102			
61180	241.9 to 243.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **LAS CASAS LN** *Starting at:* **VARBELLA PK** **$70,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108130912	LAS FRESAS WAY	LA PERLA LN	LAS CASAS LN	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61127	0.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
61128	8.3 to 9.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
61129	10.3 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
61130	14.5 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
61131	24.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
61132	30.5 to 90.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	302	SF	$120	**$36,180**
61133	91.8 to 129.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	188	SF	$120	**$22,560**
61134	130.7 to 157.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,200**

TOTAL COST FOR: W *side of* **LAS FRESAS WAY** *Starting at:* **LA PERLA LN** **$84,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108130926	LAS FRESAS WAY	LAS CASAS LN	LOS ARCOS LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61194	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
61195	6.3 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
61196	14.8 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
61197	36.8 to 55.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	93	SF	$120	**$11,100**
61192	40.8 to 41.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
61198	55.3 to 65.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
61199	69.1 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
61200	80.0 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
61201	94.8 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
61202	119.0 to 126.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
61203	126.9 to 134.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
61204	137.3 to 160.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
61193	158.7 to 159.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LAS FRESAS WAY** *Starting at:* **LAS CASAS LN** **$85,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108130930	LAS FRESAS WAY	LOS ARCOS LN	LA PERLA LN	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61217	0.2 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
61205	6.6 to 7.6 feet	**Vertical Change**	.77"	5 ft	5	REF		
61218	12.3 to 18.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
61239	18.0 to 38.6 feet	Key Note Segment		5 ft	103			
61219	39.3 to 49.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	49	SF	$40	**$1,940**
61240	49.8 to 70.3 feet	Key Note Segment		5 ft	103			
61206	51.0 to 52.0 feet	**Vertical Change**	2.01"	5 ft	5	REF		
61220	70.3 to 92.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	110	SF	$40	**$4,380**
61207	90.6 to 91.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
61221	97.7 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
61241	99.8 to 119.6 feet	Key Note Segment		5 ft	99			
61222	121.2 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
61223	128.8 to 140.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
61208	129.6 to 130.6 feet	**Vertical Change**	2.85"	5 ft	5	REF		
61209	136.4 to 137.4 feet	**Vertical Change**	1.1"	5 ft	5	REF		
61224	142.6 to 147.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
61225	150.8 to 151.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
61242	152.5 to 173.1 feet	Key Note Segment		5 ft	103			
61226	173.7 to 176.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
61227	176.7 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
61228	199.8 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
61229	223.4 to 231.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
61210	228.6 to 229.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
61243	231.8 to 251.3 feet	Key Note Segment		5 ft	98			
61230	252.5 to 258.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
61244	258.7 to 278.6 feet	Key Note Segment		5 ft	100			
61231	278.9 to 306.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	140	SF	$40	**$5,580**
61232	308.1 to 311.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108130930	LAS FRESAS WAY	LOS ARCOS LN	LA PERLA LN	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61211	308.8 to 309.8 feet	Vertical Change	-.69"	5 ft	5	REF		
61233	312.4 to 314.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
61234	316.4 to 337.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,480**
61245	337.2 to 357.7 feet	Key Note Segment		5 ft	103			
61212	357.3 to 358.3 feet	Vertical Change	-.56"	5 ft	5	REF		
61235	358.4 to 359.7 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	7	SF	$40	**$260**
61236	360.9 to 364.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
61246	364.7 to 384.4 feet	Key Note Segment		5 ft	99			
61213	374.8 to 375.8 feet	Vertical Change	.3"	5 ft	5	REF		
61237	387.2 to 403.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
61215	395.4 to 396.4 feet	Vertical Change	-.36"	5 ft	5	REF		
61238	404.0 to 409.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
61216	404.7 to 405.7 feet	Vertical Change	-.59"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **LAS FRESAS WAY** *Starting at:* **LOS ARCOS LN** **$104,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121604	LAUREL ST	684 LAUREL ST	662 LAUREL ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97378	1.3 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
97379	4.8 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97373	5.9 to 6.9 feet	**Vertical Change**	.75"	5 ft	5	REF		
97388	6.0 to 20.8 feet	Key Note Segment		5 ft	74			
97380	22.5 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
97374	38.0 to 39.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
97381	42.7 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
97382	47.9 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
97383	56.6 to 58.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
97384	60.9 to 64.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
97389	64.5 to 79.6 feet	Key Note Segment		5 ft	75			
97375	66.9 to 67.9 feet	**Vertical Change**	.55"	5 ft	5	REF		
97376	70.5 to 71.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
97385	83.7 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
97377	94.8 to 95.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
97386	94.9 to 97.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
97387	98.8 to 106.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: W *side of* **LAUREL ST** *Starting at:* **684 LAUREL ST** **$35,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121602	LAUREL ST	774 LAUREL ST	708 LAUREL ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97339	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97325	0.6 to 1.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
97340	6.8 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
97326	7.1 to 8.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
97341	15.1 to 19.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
97366	19.8 to 33.6 feet	Key Note Segment		5 ft	69			
97342	35.3 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
97327	47.7 to 48.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
97343	52.8 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
97367	64.4 to 77.9 feet	Key Note Segment		5 ft	68			
97328	65.2 to 66.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
97344	79.3 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
97345	105.7 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97368	108.6 to 123.3 feet	Key Note Segment		5 ft	74			
97329	114.0 to 115.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
97346	125.2 to 132.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
97347	132.8 to 138.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
97348	142.2 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
97330	147.1 to 153.9 feet	**Vertical Change**	.44"	5 ft	34	REF		
97369	147.6 to 158.3 feet	Key Note Segment		5 ft	54			
97349	159.5 to 196.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
97350	197.2 to 198.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
97370	199.5 to 213.0 feet	Key Note Segment		5 ft	68			
97351	213.0 to 214.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
97352	218.6 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
97353	223.5 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
97354	230.3 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
97371	244.1 to 254.3 feet	Key Note Segment		5 ft	51			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121602	LAUREL ST	774 LAUREL ST	708 LAUREL ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97331	244.6 to 245.6 feet	Vertical Change	.27"	5 ft	5	REF		
97355	254.3 to 257.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$600
97332	254.7 to 255.7 feet	Vertical Change	.41"	5 ft	5	REF		
97356	259.6 to 264.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,940
97357	264.5 to 271.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
97358	272.1 to 273.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
97359	280.3 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
97360	289.3 to 290.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
97372	290.3 to 305.2 feet	Key Note Segment		5 ft	75			
97333	291.8 to 292.8 feet	Vertical Change	.26"	5 ft	5	REF		
97334	304.3 to 305.3 feet	Vertical Change	.28"	5 ft	5	REF		
97361	305.3 to 306.4 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	5	SF	$40	$220
97335	308.1 to 309.1 feet	Vertical Change	.89"	5 ft	5	REF		
97362	308.8 to 311.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,860
97336	312.8 to 313.8 feet	Vertical Change	.47"	5 ft	5	LF	$75	$375
97363	314.2 to 316.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
97337	317.4 to 318.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
97364	320.0 to 321.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780
97365	322.4 to 323.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
97338	323.6 to 324.6 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375

TOTAL COST FOR: W *side of* **LAUREL ST** *Starting at:* **774 LAUREL ST** **$95,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201432	LEMON AVE	1843 LEMON AVE	SAN JOSE AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105903	0.1 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
105896	8.5 to 9.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
105904	9.3 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,100**
105905	30.3 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
105906	37.6 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
105907	47.8 to 51.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
105909	51.7 to 74.0 feet	Key Note Segment		5 ft	112			
105898	52.7 to 53.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
105899	57.4 to 58.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
105910	79.9 to 100.2 feet	Key Note Segment		5 ft	101			
105900	80.1 to 81.1 feet	**Vertical Change**	.7"	5 ft	5	REF		
105901	96.5 to 97.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
105902	102.6 to 103.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
105908	106.4 to 107.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **1843 LEMON AVE** **$26,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201304	LEMON AVE	2066 SAN BRUNO AVE	MANGO AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105407	0.0 to 4.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
105408	4.1 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
105398	5.0 to 6.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
105399	15.9 to 16.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
105400	23.9 to 24.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
105415	27.2 to 45.5 feet	Key Note Segment		5 ft	92			
105401	36.7 to 37.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
105402	45.9 to 46.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
105409	47.8 to 49.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105410	49.1 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
105416	52.7 to 72.8 feet	Key Note Segment		5 ft	101			
105411	72.8 to 93.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	105	SF	$40	**$4,180**
105403	86.7 to 87.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
105412	99.6 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
105417	119.5 to 138.6 feet	Key Note Segment		5 ft	96			
105413	139.1 to 140.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
105404	139.2 to 140.2 feet	**Vertical Change**	-.93"	5 ft	5	REF		
105414	142.7 to 146.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
105418	146.8 to 166.4 feet	Key Note Segment		5 ft	98			
105405	157.4 to 158.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
105406	166.7 to 167.7 feet	**Vertical Change**	-1.06"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NW *side of* **LEMON AVE** *Starting at:* **2066 SAN BRUNO AVE** **$35,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201301	LEMON AVE	GEORGIA AVE	2044 GEORGIA AVE	17

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105397	4.1 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**

TOTAL COST FOR: NW *side of* **LEMON AVE** *Starting at:* **GEORGIA AVE** **$4,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201344	LEMON AVE	HAZEL AVE	GEORGIA AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105499	0.3 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105500	7.2 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
105518	14.8 to 33.7 feet	Key Note Segment		5 ft	95			
105486	15.5 to 16.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
105487	24.8 to 25.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
105488	33.9 to 34.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
105525	36.9 to 37.9 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
105501	37.0 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
105489	45.2 to 46.2 feet	**Vertical Change**	-.43"	5 ft	5	REF		
105502	60.0 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
105519	71.4 to 93.2 feet	Key Note Segment		5 ft	109			
105503	93.9 to 95.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
105504	95.3 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
105490	107.0 to 108.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
105520	126.5 to 146.0 feet	Key Note Segment		5 ft	98			
105491	146.6 to 147.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
105505	147.8 to 149.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
105506	154.8 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
105507	162.0 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105492	162.4 to 163.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
105508	163.3 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	277	SF	$120	**$33,300**
105521	219.1 to 241.8 feet	Key Note Segment		5 ft	114			
105493	226.3 to 227.3 feet	**Vertical Change**	-.47"	5 ft	5	REF		
105509	244.4 to 245.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
105510	248.7 to 250.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
105494	251.5 to 252.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
105511	252.4 to 254.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
105522	254.9 to 276.6 feet	Key Note Segment		5 ft	109			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201344	LEMON AVE	HAZEL AVE	GEORGIA AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105512	278.9 to 280.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
105513	280.0 to 305.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
105495	305.7 to 306.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
105523	306.8 to 326.6 feet	Key Note Segment		5 ft	99			
105514	327.0 to 331.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	23	SF	$40	**$900**
105496	328.3 to 329.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
105515	338.2 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
105516	351.5 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
105524	361.3 to 379.1 feet	Key Note Segment		5 ft	89			
105497	362.1 to 363.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
105498	379.6 to 380.6 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
105517	382.3 to 389.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **HAZEL AVE** **$112,404.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201306	LEMON AVE	MANGO AVE	HAZEL AVE	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105419	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
105420	26.8 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105421	30.9 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
105422	39.5 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
105423	55.5 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
105424	67.7 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **MANGO AVE** **$25,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191515	LEMON AVE	NAVEL AVE	SAUNDERS AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104054	0.0 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
104066	16.4 to 36.3 feet	Key Note Segment		5 ft	99			
104040	17.0 to 18.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
104041	26.6 to 27.6 feet	**Vertical Change**	.59"	5 ft	5	REF		
104055	37.8 to 53.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
104042	41.8 to 42.8 feet	**Vertical Change**	-.68"	5 ft	5	REF		
104043	46.3 to 53.1 feet	**Vertical Change**	.41"	5 ft	34	REF		
104056	55.3 to 67.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
104044	60.9 to 66.6 feet	**Vertical Change**	.27"	5 ft	28	REF		
104067	67.8 to 87.8 feet	Key Note Segment		5 ft	100			
104045	79.3 to 80.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
104068	90.5 to 110.0 feet	Key Note Segment		5 ft	98			
104046	110.0 to 111.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
104057	110.8 to 126.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
104047	123.8 to 124.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
104058	127.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
104048	129.2 to 130.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
104049	134.7 to 135.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
104059	149.3 to 154.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
104069	154.2 to 174.2 feet	Key Note Segment		5 ft	100			
104070	178.2 to 197.1 feet	Key Note Segment		5 ft	95			
104060	197.1 to 205.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	43	SF	$40	**$1,720**
104061	206.6 to 210.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
104062	214.3 to 216.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
104063	222.6 to 223.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
104051	223.3 to 224.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
104064	224.0 to 241.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
104071	241.9 to 259.8 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191515	LEMON AVE	NAVEL AVE	SAUNDERS AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104053	251.7 to 252.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104065	264.1 to 266.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **NAVEL AVE** **$69,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191439	LEMON AVE	PARKWOOD AVE	PARKWOOD AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103786	0.5 to 2.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
103791	2.6 to 20.3 feet	Key Note Segment		5 ft	89			
103787	23.5 to 30.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
103788	30.5 to 35.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
103792	35.4 to 54.3 feet	Key Note Segment		5 ft	95			
103784	46.0 to 47.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
103785	54.8 to 55.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103789	55.5 to 70.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	74	SF	$120	**$8,820**
103790	70.6 to 71.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **PARKWOOD AVE** **$17,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191444	LEMON AVE	PARKWOOD AVE	PERKINS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103819	2.8 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
103826	5.8 to 6.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
103823	8.8 to 27.8 feet	Key Note Segment		5 ft	95			
103812	17.4 to 18.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
103813	19.1 to 20.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103814	28.5 to 29.5 feet	**Vertical Change**	-.47"	5 ft	5	REF		
103824	35.2 to 53.8 feet	Key Note Segment		5 ft	93			
103816	54.4 to 55.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
103820	55.4 to 83.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,100**
103817	65.3 to 66.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
103821	83.9 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
103825	92.6 to 113.8 feet	Key Note Segment		5 ft	106			
103818	113.7 to 114.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
103822	115.3 to 116.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **PARKWOOD AVE** **$25,179.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191501	LEMON AVE	PERKINS AVE	PARKWOOD AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103916	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
103917	2.4 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
103918	8.6 to 68.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	300	SF	$120	**$36,000**
103919	68.6 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
103920	76.8 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
103921	83.3 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
103922	89.3 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
103923	92.6 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	134	SF	$120	**$16,020**
103913	111.8 to 112.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
103924	119.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
103925	124.3 to 134.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
103914	133.8 to 134.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
103926	134.3 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
103915	144.1 to 145.1 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **PERKINS AVE** **$78,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201403	LEMON AVE	SAN BRUNO AVE	SAN DIEGO AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105618	0.3 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
105600	4.2 to 5.2 feet	**Vertical Change**	-.56"	5 ft	5	SF	$75	**$375**
105619	8.0 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
105643	13.0 to 36.8 feet	Key Note Segment		5 ft	119			
105620	38.3 to 39.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
105602	39.2 to 40.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
105644	40.5 to 59.3 feet	Key Note Segment		5 ft	94			
105603	50.1 to 51.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
105621	62.3 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
105604	64.5 to 65.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
105622	69.4 to 97.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,860**
105605	74.5 to 75.5 feet	**Vertical Change**	.71"	5 ft	5	REF		
105645	98.4 to 119.1 feet	Key Note Segment		5 ft	104			
105651	119.2 to 120.3 feet		5.0-6.0%	5 ft	6			
105606	119.5 to 120.5 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
105623	120.7 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105624	124.8 to 126.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105625	126.8 to 127.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105646	127.9 to 151.2 feet	Key Note Segment		5 ft	116			
105607	143.7 to 144.7 feet	**Vertical Change**	-.57"	5 ft	5	REF		
105626	151.8 to 167.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
105627	170.1 to 172.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
105628	174.0 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
105608	177.2 to 178.2 feet	**Vertical Change**	-.56"	5 ft	5	REF		
105629	186.2 to 187.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
105630	189.9 to 192.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
105631	192.6 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
105647	199.2 to 222.8 feet	Key Note Segment		5 ft	118			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201403	LEMON AVE	SAN BRUNO AVE	SAN DIEGO AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105632	223.9 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
105648	231.1 to 250.4 feet	Key Note Segment		5 ft	97			
105609	241.2 to 242.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
105633	252.1 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
105634	262.8 to 265.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
105635	265.3 to 274.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
105610	266.1 to 267.1 feet	**Vertical Change**	-.62"	5 ft	5	REF		
105649	277.6 to 297.3 feet	Key Note Segment		5 ft	98			
105611	290.9 to 291.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
105636	298.8 to 300.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105637	301.0 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
105612	304.6 to 305.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
105638	312.2 to 316.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
105639	318.3 to 322.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
105613	327.0 to 328.0 feet	**Vertical Change**	-.58"	5 ft	5	SF	$75	**$375**
105650	328.3 to 349.8 feet	Key Note Segment		5 ft	108			
105614	338.6 to 339.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
105640	349.8 to 351.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
105641	354.4 to 358.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
105616	361.6 to 362.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
105617	366.9 to 367.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
105642	369.8 to 371.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **SAN BRUNO AVE** **$79,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201016	LEMON AVE	SAN CARLOS AVE	STANFORD AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104416	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
104407	3.4 to 4.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
104417	4.8 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
104418	14.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
104429	23.8 to 44.1 feet	Key Note Segment		5 ft	102			
104408	24.6 to 25.6 feet	**Vertical Change**	.62"	5 ft	5	REF		
104409	44.2 to 45.2 feet	**Vertical Change**	.84"	5 ft	5	REF		
104419	45.2 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
104420	52.3 to 54.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
104410	53.0 to 54.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
104421	55.2 to 57.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
104422	57.6 to 67.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
104411	62.3 to 63.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
104423	68.7 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
104430	72.9 to 92.9 feet	Key Note Segment		5 ft	100			
104424	93.8 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
104425	117.7 to 120.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
104431	120.9 to 139.8 feet	Key Note Segment		5 ft	95			
104412	131.3 to 132.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
104426	144.6 to 147.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
104432	148.4 to 167.8 feet	Key Note Segment		5 ft	97			
104413	150.0 to 151.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
104414	168.0 to 169.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104427	169.8 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
104428	179.6 to 216.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	183	SF	$120	**$21,900**
104415	200.2 to 201.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
104433	217.1 to 237.6 feet	Key Note Segment		5 ft	103			

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **SAN CARLOS AVE** **$67,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201415	LEMON AVE	SAN DIEGO AVE	SAN BRUNO AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105740	4.1 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
105741	12.1 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
105742	27.5 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	327	SF	$120	**$39,180**
105732	28.1 to 29.1 feet	Vertical Change	.29"	5 ft	5	REF		
105733	43.5 to 44.5 feet	Vertical Change	-.37"	5 ft	5	REF		
105734	84.6 to 85.6 feet	Vertical Change	.27"	5 ft	5	REF		
105743	96.9 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
105735	107.2 to 108.2 feet	Vertical Change	-.36"	5 ft	5	LF	$75	**$375**
105744	111.2 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
105745	141.3 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
105746	159.7 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,360**
105736	182.8 to 183.8 feet	Vertical Change	.29"	5 ft	5	REF		
105747	198.2 to 225.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	134	SF	$120	**$16,080**
105737	216.9 to 217.9 feet	Vertical Change	1.91"	5 ft	5	REF		
105738	221.2 to 222.2 feet	Vertical Change	-.35"	5 ft	5	REF		
105748	233.7 to 235.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
105749	239.3 to 282.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	218	SF	$120	**$26,100**
105751	279.3 to 280.3 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
105750	282.8 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
105739	285.1 to 286.1 feet	Vertical Change	-.46"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **SAN DIEGO AVE** **$138,969.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201439	LEMON AVE	SAN JOSE AVE	SAN RAMON AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105969	0.7 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
105970	8.6 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
105966	14.7 to 15.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
105971	24.2 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
105967	43.2 to 44.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
105972	54.8 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
105973	80.3 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
105974	99.3 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
105975	105.6 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
105976	140.3 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
105968	143.8 to 144.8 feet	**Vertical Change**	.48"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **SAN JOSE AVE** **$34,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201430	LEMON AVE	SAN RAMON AVE	SAN JOSE AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105893	3.5 to 24.4 feet	Key Note Segment		5 ft	105			
105873	3.7 to 4.7 feet	Vertical Change	1.19"	5 ft	5	REF		
105874	13.2 to 14.2 feet	Vertical Change	.27"	5 ft	5	REF		
105875	24.2 to 25.2 feet	Vertical Change	.32"	5 ft	5	REF		
105882	24.9 to 26.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
105883	27.4 to 28.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
105876	29.2 to 30.2 feet	Vertical Change	-.62"	5 ft	5	SF	$75	**$375**
105884	31.0 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105885	34.4 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
105894	36.7 to 57.3 feet	Key Note Segment		5 ft	103			
105877	37.1 to 38.1 feet	Vertical Change	.5"	5 ft	5	REF		
105878	56.9 to 57.9 feet	Vertical Change	.26"	5 ft	5	REF		
105886	57.9 to 59.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105887	59.2 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
105888	69.0 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
105889	79.1 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
105879	82.5 to 83.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
105890	104.3 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
105895	114.9 to 135.6 feet	Key Note Segment		5 ft	104			
105880	116.4 to 117.4 feet	Vertical Change	-.26"	5 ft	5	REF		
105881	135.4 to 136.4 feet	Vertical Change	-.8"	5 ft	5	REF		
105891	135.9 to 136.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
105892	136.9 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: E *side of* **LEMON AVE** *Starting at:* **SAN RAMON AVE** **$12,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191527	LEMON AVE	SAUNDERS AVE	NAVEL AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104164	3.8 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
104165	14.0 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
104166	35.5 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
104158	41.4 to 42.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104167	46.5 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
104159	54.1 to 55.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
104168	79.1 to 82.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
104169	84.4 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	190	SF	$120	**$22,740**
104160	105.7 to 106.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
104161	120.2 to 121.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
104170	122.6 to 132.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
104171	132.2 to 144.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
104162	132.8 to 133.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
104163	144.0 to 145.0 feet	**Vertical Change**	.44"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **SAUNDERS AVE** **$79,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201026	LEMON AVE	STANFORD AVE	SAN CARLOS AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104490	0.0 to 26.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,140**
104487	8.2 to 9.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104491	27.3 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
104492	37.4 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	172	SF	$120	**$20,640**
104493	73.3 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
104494	82.8 to 111.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	**$17,340**
104488	98.3 to 99.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104495	114.2 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**
104489	148.3 to 149.3 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LEMON AVE** *Starting at:* **STANFORD AVE** **$86,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221112	LEMON TREE DR	ALMOND AVE	PEAR TREE DR	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81327	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
81328	2.6 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
81329	14.9 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
81330	24.3 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
81331	28.5 to 44.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
81332	46.0 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
81333	59.2 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: W *side of* **LEMON TREE DR** *Starting at:* **ALMOND AVE** **$29,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221111	LEMON TREE DR	PEAR TREE DR	ALMOND AVE	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81317	0.0 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
81318	8.2 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81324	11.1 to 32.8 feet	Key Note Segment		5 ft	108			
81316	11.9 to 12.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
81325	35.3 to 56.1 feet	Key Note Segment		5 ft	104			
81319	57.8 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$18,000**
81320	88.8 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81326	91.4 to 111.4 feet	Key Note Segment		5 ft	100			
81321	116.3 to 121.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
81322	121.1 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
81323	131.9 to 133.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: E *side of* **LEMON TREE DR** *Starting at:* **PEAR TREE DR** **$34,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221122	LEMON TREE DR	PEAR TREE DR	CHERRY TREE DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81394	0.0 to 4.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
81395	8.6 to 20.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
81439	20.5 to 40.8 feet	Key Note Segment		5 ft	101			
81396	41.5 to 43.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
81397	44.3 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81398	48.5 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
81440	71.0 to 93.3 feet	Key Note Segment		5 ft	112			
81399	95.2 to 100.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
81441	100.4 to 120.6 feet	Key Note Segment		5 ft	101			
81400	120.6 to 126.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**
81372	129.2 to 130.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
81401	129.9 to 141.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
81402	144.4 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
81403	149.3 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
81404	164.2 to 167.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
81405	167.3 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
81442	173.5 to 194.1 feet	Key Note Segment		5 ft	103			
81406	194.9 to 200.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
81443	200.2 to 221.0 feet	Key Note Segment		5 ft	104			
81373	220.8 to 221.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
81407	222.5 to 247.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
81408	247.3 to 264.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,260**
81375	249.8 to 250.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
81409	265.9 to 274.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
81444	275.1 to 295.9 feet	Key Note Segment		5 ft	104			
81410	296.8 to 320.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
81376	302.8 to 303.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
81411	320.4 to 323.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221122	LEMON TREE DR	PEAR TREE DR	CHERRY TREE DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81445	324.6 to 345.5 feet	Key Note Segment		5 ft	104			
81412	348.6 to 353.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
81446	354.8 to 373.4 feet	Key Note Segment		5 ft	93			
81413	375.2 to 401.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
81414	401.8 to 404.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
81447	405.0 to 425.9 feet	Key Note Segment		5 ft	105			
81377	422.5 to 423.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
81378	425.5 to 426.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
81415	426.1 to 429.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$740**
81416	429.8 to 437.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
81417	438.7 to 449.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
81418	451.7 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81419	455.0 to 458.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
81420	460.9 to 473.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
81421	474.3 to 478.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
81448	478.3 to 498.0 feet	Key Note Segment		5 ft	99			
81379	495.3 to 496.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
81422	498.7 to 505.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
81449	505.5 to 526.5 feet	Key Note Segment		5 ft	105			
81380	526.5 to 527.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
81423	526.7 to 527.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
81424	529.9 to 530.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81425	534.9 to 537.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
81381	536.8 to 537.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
81426	538.2 to 540.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
81427	549.0 to 556.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
81382	558.3 to 559.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
81428	559.0 to 578.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221122	LEMON TREE DR	PEAR TREE DR	CHERRY TREE DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81383	561.0 to 562.0 feet	Vertical Change	-.6"	5 ft	5	REF		
81384	567.7 to 568.7 feet	Vertical Change	.33"	5 ft	5	REF		
81450	580.2 to 600.2 feet	Key Note Segment		5 ft	100			
81385	580.5 to 581.5 feet	Vertical Change	.29"	5 ft	5	REF		
81386	600.0 to 601.0 feet	Vertical Change	-.26"	5 ft	5	REF		
81429	601.7 to 604.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
81430	606.0 to 607.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
81451	608.8 to 628.8 feet	Key Note Segment		5 ft	100			
81431	628.9 to 630.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	**$300**
81432	630.6 to 654.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
81433	662.3 to 681.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
81452	681.8 to 701.7 feet	Key Note Segment		5 ft	100			
81434	704.7 to 708.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
81453	709.7 to 730.3 feet	Key Note Segment		5 ft	103			
81435	731.0 to 735.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
81436	736.3 to 745.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
81437	745.5 to 758.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
81454	761.2 to 782.0 feet	Key Note Segment		5 ft	104			
81388	763.7 to 764.7 feet	Vertical Change	.43"	5 ft	5	REF		
81389	767.3 to 770.8 feet	Vertical Change	.39"	5 ft	18	REF		
81390	772.9 to 773.9 feet	Vertical Change	.54"	5 ft	5	REF		
81391	776.3 to 777.3 feet	Vertical Change	-.61"	5 ft	5	REF		
81438	783.6 to 800.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
81393	784.8 to 785.8 feet	Vertical Change	-.43"	5 ft	5	REF		
81455	800.2 to 801.5 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **LEMON TREE DR** *Starting at:* **PEAR TREE DR** **$227,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211329	LEWIS ST	113 LEWIS ST	MONTEREY ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106151	0.0 to 1.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
106152	1.2 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106153	5.2 to 13.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
106144	14.1 to 15.1 feet	**Vertical Change**	-.57"	5 ft	5	REF		
106145	14.1 to 15.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
106154	14.5 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
106155	19.6 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
106156	24.4 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
106146	26.6 to 27.6 feet	**Vertical Change**	.66"	5 ft	5	REF		
106157	38.9 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
106147	68.2 to 69.2 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
106158	78.7 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
106148	88.6 to 89.6 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
106159	99.2 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
106161	107.1 to 108.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
106149	110.7 to 111.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
106160	113.3 to 117.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	21	SF	$120	**$2,520**
106150	115.7 to 116.7 feet	**Vertical Change**	3.19"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **LEWIS ST** *Starting at:* **113 LEWIS ST** **$28,404.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211326	LEWIS ST	MONTEREY ST	316 LEWIS ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106131	0.0 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
106132	16.0 to 28.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
106133	28.1 to 30.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
106140	29.8 to 30.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
106134	36.5 to 58.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	110	SF	$40	**$4,400**
106141	54.3 to 55.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
106139	72.3 to 87.7 feet	Key Note Segment		5 ft	77			
106129	72.9 to 73.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
106135	88.0 to 92.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
106130	88.9 to 89.9 feet	**Vertical Change**	-.42"	5 ft	5	REF		
106136	92.3 to 96.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
106137	96.5 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
106138	100.6 to 115.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
106142	112.8 to 114.0 feet		5.0-6.0%	5 ft	6			
106143	114.0 to 115.4 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: S *side of* **LEWIS ST** *Starting at:* **MONTEREY ST** **$37,258.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161330	LIBERTY LN	BARON ST	STATE ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86495	0.2 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
86496	13.1 to 15.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
86497	24.5 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
86498	52.9 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
86499	65.3 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
86492	73.4 to 74.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
86500	76.1 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
86501	91.0 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
86502	92.0 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
86493	95.0 to 96.0 feet	**Vertical Change**	.45"	5 ft	5	REF		
86503	112.7 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86504	120.8 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
86505	140.3 to 148.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,980**
86506	151.8 to 176.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
86507	178.1 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
86508	185.8 to 189.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: E *side of* **LIBERTY LN** *Starting at:* **BARON ST** **$88,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161352	LIBERTY LN	DOUBLE TREE WAY	SUNSET AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86711	0.6 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
86689	2.2 to 3.2 feet	**Vertical Change**	.78"	5 ft	5	REF		
86690	4.5 to 8.4 feet	**Vertical Change**	.36"	5 ft	20	REF		
86691	11.8 to 12.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
86692	18.6 to 19.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
86693	26.9 to 29.8 feet	**Vertical Change**	.44"	5 ft	15	REF		
86712	34.9 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
86713	44.3 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
86714	50.6 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
86715	55.2 to 58.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
86716	58.8 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86717	63.2 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86718	71.3 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
86719	82.0 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
86694	83.7 to 84.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
86720	87.3 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86721	109.1 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
86696	120.7 to 121.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
86697	133.7 to 134.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
86722	136.8 to 138.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
86723	141.3 to 151.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
86698	146.6 to 147.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
86724	151.8 to 157.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
86699	154.2 to 155.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
86725	158.1 to 162.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
86726	172.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
86727	182.3 to 184.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
86728	184.7 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161352	LIBERTY LN	DOUBLE TREE WAY	SUNSET AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86729	203.9 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86730	212.4 to 214.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
86731	216.8 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
86732	227.6 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
86733	245.2 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
86734	255.3 to 257.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
86735	260.3 to 261.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86736	266.8 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
86737	281.3 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
86738	296.8 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
86739	311.5 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86772	314.5 to 344.6 feet	Key Note Segment		5 ft	151			
86700	336.8 to 337.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
86740	346.6 to 347.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86741	350.4 to 352.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
86742	355.0 to 364.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
86743	366.1 to 369.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86744	371.9 to 379.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
86745	379.8 to 386.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
86746	389.5 to 407.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
86747	432.3 to 436.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
86748	439.2 to 465.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
86701	448.6 to 449.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
86749	474.6 to 475.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86750	487.5 to 489.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
86773	502.5 to 529.1 feet	Key Note Segment		5 ft	133			
86751	532.3 to 539.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
86774	539.9 to 564.4 feet	Key Note Segment		5 ft	123			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161352	LIBERTY LN	DOUBLE TREE WAY	SUNSET AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86702	554.4 to 555.4 feet	Vertical Change	.33"	5 ft	5	REF		
86752	571.6 to 572.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86753	575.3 to 590.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
86754	592.8 to 596.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
86755	601.8 to 623.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
86703	623.8 to 624.8 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
86756	625.2 to 631.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
86757	634.8 to 664.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,580**
86758	666.7 to 674.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
86759	674.9 to 683.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
86760	687.6 to 690.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
86761	693.5 to 716.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	114	SF	$120	**$13,680**
86762	719.8 to 728.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
86763	733.2 to 744.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
86764	744.9 to 751.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
86775	752.6 to 777.9 feet	Key Note Segment		5 ft	127			
86704	753.0 to 754.0 feet	Vertical Change	.33"	5 ft	5	REF		
86705	766.8 to 767.8 feet	Vertical Change	.26"	5 ft	5	REF		
86765	777.9 to 784.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	32	SF	$40	**$1,260**
86706	780.2 to 781.2 feet	Vertical Change	.29"	5 ft	5	REF		
86766	787.4 to 793.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
86767	795.4 to 812.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
86707	796.7 to 797.7 feet	Vertical Change	.27"	5 ft	5	REF		
86768	814.2 to 820.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
86708	822.5 to 823.5 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
86769	823.6 to 826.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
86770	826.6 to 847.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
86709	848.4 to 849.4 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161352	LIBERTY LN	DOUBLE TREE WAY	SUNSET AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86771	853.4 to 861.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
86710	861.3 to 862.3 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **LIBERTY LN** *Starting at:* **DOUBLE TREE WAY** **$292,245.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161340	LIBERTY LN	STATE ST	TODD ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86617	0.3 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
86618	12.3 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
86612	25.4 to 26.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
86613	31.9 to 32.9 feet	**Vertical Change**	-.85"	5 ft	5	SF	$75	**$375**
86619	34.7 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
86620	37.6 to 39.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
86621	41.3 to 54.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
86622	55.6 to 56.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
86623	58.8 to 90.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	159	SF	$120	**$19,020**
86624	94.9 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
86625	105.3 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
86626	110.6 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
86627	132.8 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86628	137.3 to 158.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
86614	138.6 to 139.6 feet	**Vertical Change**	1.32"	5 ft	5	REF		
86615	151.8 to 152.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
86629	168.3 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86630	174.6 to 181.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
86631	185.1 to 194.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
86616	194.7 to 195.7 feet	**Vertical Change**	.98"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **LIBERTY LN** *Starting at:* **STATE ST** **$70,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161354	LIBERTY LN	SUNSET AVE	BARON ST	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86777	1.8 to 5.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
86778	8.8 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
86779	17.8 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
86780	25.4 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
86781	32.5 to 38.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
86782	48.0 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86776	56.2 to 57.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
86783	57.3 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
86784	72.8 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
86785	75.6 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
86786	83.1 to 91.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
86787	91.9 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86788	95.8 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
86789	108.2 to 114.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
86790	116.6 to 121.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
86791	122.3 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
86792	136.2 to 141.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
86793	143.5 to 160.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
86794	168.9 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: E *side of* **LIBERTY LN** *Starting at:* **SUNSET AVE** **$72,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170854	LIBERTY LN	TODD ST	DOUBLE TREE WAY	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71593	2.0 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
71594	31.3 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
71595	40.7 to 58.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,380**
71590	58.8 to 59.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
71596	58.8 to 64.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
71597	68.7 to 74.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
71598	77.0 to 82.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
71599	85.6 to 93.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
71606	94.0 to 120.2 feet	Key Note Segment		5 ft	131			
71591	119.5 to 120.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
71600	123.3 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
71601	132.1 to 139.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
71602	143.8 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71603	147.8 to 158.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,420**
71592	153.8 to 154.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
71604	159.3 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71605	166.7 to 181.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
71607	178.7 to 179.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **LIBERTY LN** *Starting at:* **TODD ST** **$63,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2201121501	LIGHTHOUSE CT	MAINBERRY DR	MAINBERRY DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96851	1.2 to 5.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
96852	8.3 to 14.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
96853	14.3 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
96840	14.9 to 15.9 feet	**Vertical Change**	.63"	5 ft	5	REF		
96854	18.3 to 31.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
96878	31.8 to 52.8 feet	Key Note Segment		5 ft	105			
96841	53.1 to 54.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
96855	56.6 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
96879	60.4 to 79.8 feet	Key Note Segment		5 ft	97			
96842	70.3 to 71.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
96843	79.6 to 80.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
96856	83.3 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
96857	89.7 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
96858	94.5 to 108.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
96844	111.5 to 112.5 feet	**Vertical Change**	.7"	5 ft	5	REF		
96859	111.6 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
96845	123.3 to 124.3 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
96846	134.6 to 135.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
96860	145.3 to 147.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
96880	148.0 to 167.3 feet	Key Note Segment		5 ft	97			
96861	171.7 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
96862	182.5 to 184.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
96863	184.1 to 185.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96864	200.3 to 203.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
96865	204.7 to 206.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
96866	216.9 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
96867	222.3 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
96881	228.2 to 251.2 feet	Key Note Segment		5 ft	115			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2201121501	LIGHTHOUSE CT	MAINBERRY DR	MAINBERRY DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96847	233.1 to 234.1 feet	Vertical Change	-.29"	5 ft	5	REF		
96848	236.4 to 237.4 feet	Vertical Change	.31"	5 ft	5	REF		
96868	261.8 to 264.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
96869	266.8 to 269.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
96870	281.1 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
96882	283.8 to 305.5 feet	Key Note Segment		5 ft	109			
96871	306.2 to 309.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	**$660**
96872	309.5 to 312.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
96873	312.8 to 327.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
96874	333.2 to 336.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
96875	340.8 to 346.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
96883	346.5 to 369.2 feet	Key Note Segment		5 ft	114			
96849	368.5 to 369.5 feet	Vertical Change	.29"	5 ft	5	REF		
96876	369.3 to 379.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	50	SF	$40	**$2,000**
96877	381.0 to 396.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
96850	396.7 to 397.7 feet	Vertical Change	.39"	5 ft	5	REF		

TOTAL COST FOR: N/W/S *side of* **LIGHTHOUSE CT** *Starting at:* **MAINBERRY DR** **$78,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121227	LIGHTHOUSE DR	HARBOR DR	SHANNON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95026	0.3 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
95017	10.1 to 11.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
95027	19.3 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
95018	22.9 to 23.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
95028	41.6 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
95029	59.5 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
95030	66.0 to 71.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
95031	74.8 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
95032	97.5 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
95020	102.3 to 103.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
95021	112.7 to 113.7 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
95022	118.4 to 119.4 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
95033	121.4 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
95034	143.1 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
95039	144.5 to 146.2 feet		5.0-6.0%	5 ft	8			
95023	145.8 to 146.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95035	151.3 to 158.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
95036	158.0 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
95024	166.3 to 167.3 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
95025	171.0 to 172.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
95037	182.2 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
95038	188.6 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**

TOTAL COST FOR: S *side of* **LIGHTHOUSE DR** *Starting at:* **HARBOR DR** **$67,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121456	LIGHTHOUSE DR	MAINBERRY DR	MAINBERRY DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96819	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
96808	31.8 to 32.8 feet	**Vertical Change**	1.04"	5 ft	5	SF	$75	**$375**
96809	37.7 to 38.7 feet	**Vertical Change**	.96"	5 ft	5	SF	$75	**$375**
96820	41.1 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
96810	44.4 to 45.4 feet	**Vertical Change**	-.73"	5 ft	5	SF	$75	**$375**
96811	57.5 to 58.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
96812	70.6 to 71.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
96813	78.7 to 79.7 feet	**Vertical Change**	2.68"	5 ft	5	SF	$75	**$375**
96821	93.0 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96822	96.6 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
96814	103.8 to 104.8 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
96815	119.6 to 120.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
96823	122.6 to 125.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
96816	124.5 to 125.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
96824	125.0 to 132.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
96825	132.6 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
96826	139.9 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
96817	151.8 to 152.8 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
96818	154.8 to 155.8 feet	**Vertical Change**	2.95"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **LIGHTHOUSE DR** *Starting at:* **MAINBERRY DR** **$19,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121527	LIGHTHOUSE DR	MAINBERRY DR	HARBOR DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97045	0.0 to 17.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,740**
97046	22.0 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
97074	27.7 to 41.7 feet	Key Note Segment		5 ft	70			
97047	41.7 to 45.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
97048	46.3 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
97049	59.6 to 62.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
97075	64.8 to 78.7 feet	Key Note Segment		5 ft	70			
97031	72.7 to 73.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
97050	81.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
97051	100.6 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
97052	108.1 to 118.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
97032	121.2 to 122.2 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
97053	124.9 to 132.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
97076	132.3 to 146.8 feet	Key Note Segment		5 ft	73			
97033	140.4 to 141.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
97054	146.8 to 150.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
97034	148.9 to 149.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
97055	150.8 to 184.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,980**
97035	160.7 to 161.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
97036	173.6 to 174.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
97037	179.1 to 180.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		
97056	184.1 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
97057	189.8 to 195.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
97077	195.2 to 219.7 feet	Key Note Segment		5 ft	123			
97038	212.0 to 213.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
97058	219.7 to 224.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$880**
97079	222.6 to 223.6 feet		6.0-7.0%	5 ft	5			
97039	226.3 to 227.3 feet	**Vertical Change**	-.82"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121527	LIGHTHOUSE DR	MAINBERRY DR	HARBOR DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97040	232.8 to 233.8 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
97041	241.2 to 242.2 feet	Vertical Change	.45"	5 ft	5	REF		
97059	241.7 to 243.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
97060	243.7 to 249.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
97061	251.8 to 261.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	$5,580
97062	263.8 to 269.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,660
97063	269.9 to 273.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,860
97078	273.0 to 287.1 feet	Key Note Segment		5 ft	71			
97042	274.6 to 275.6 feet	Vertical Change	-.41"	5 ft	5	REF		
97064	290.1 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,820
97065	300.1 to 317.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	$10,260
97043	316.4 to 317.4 feet	Vertical Change	.33"	5 ft	5	REF		
97066	321.5 to 355.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	170	SF	$120	$20,400
97067	355.5 to 357.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
97068	360.4 to 362.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
97044	362.5 to 363.5 feet	Vertical Change	.26"	5 ft	5	REF		
97069	365.1 to 367.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
97070	371.7 to 377.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
97071	377.1 to 388.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,080
97072	388.9 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
97073	392.7 to 393.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660

TOTAL COST FOR: S *side of* **LIGHTHOUSE DR** *Starting at:* **MAINBERRY DR** **$140,065.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121242	LIGHTHOUSE DR	SHANNON AVE	MAINBERRY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95192	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
95193	7.6 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
95194	23.8 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
95176	28.0 to 29.0 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
95195	32.8 to 35.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
95196	37.1 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
95224	51.8 to 66.3 feet	Key Note Segment		5 ft	73			
95197	66.3 to 72.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,160**
95198	75.8 to 86.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
95199	86.3 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
95177	92.7 to 93.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
95200	93.5 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
95201	112.4 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
95225	115.3 to 129.9 feet	Key Note Segment		5 ft	73			
95178	130.3 to 131.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
95202	155.3 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
95179	172.3 to 173.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
95203	172.8 to 177.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
95204	178.1 to 179.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
95226	179.8 to 203.4 feet	Key Note Segment		5 ft	118			
95180	187.7 to 188.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
95205	207.0 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
95181	208.3 to 209.3 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
95206	235.2 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
95207	252.3 to 253.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
95227	253.5 to 268.2 feet	Key Note Segment		5 ft	74			
95208	268.9 to 275.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
95209	275.9 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121242	LIGHTHOUSE DR	SHANNON AVE	MAINBERRY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95210	286.3 to 288.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
95211	289.4 to 292.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
95228	305.8 to 320.1 feet	Key Note Segment		5 ft	72			
95212	327.0 to 328.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
95213	330.8 to 333.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
95214	333.3 to 341.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
95215	344.9 to 348.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
95182	346.3 to 347.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
95216	365.3 to 367.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
95229	367.5 to 384.2 feet	Key Note Segment		5 ft	84			
95217	395.9 to 408.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
95218	415.3 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
95230	430.2 to 443.1 feet	Key Note Segment		5 ft	65			
95219	443.1 to 444.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
95220	444.4 to 445.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
95183	446.6 to 447.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
95184	448.3 to 449.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
95185	452.8 to 453.8 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
95186	461.1 to 462.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
95187	463.3 to 464.3 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
95188	477.7 to 478.7 feet	**Vertical Change**	1.17"	5 ft	5	SF	$75	**$375**
95231	490.1 to 504.6 feet	Key Note Segment		5 ft	73			
95189	498.5 to 499.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
95221	504.7 to 516.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,300**
95222	518.8 to 523.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
95190	523.8 to 524.8 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
95223	534.0 to 536.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
95232	534.3 to 536.8 feet		6.0-7.0%	5 ft	13			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121242	LIGHTHOUSE DR	SHANNON AVE	MAINBERRY DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95233	534.3 to 536.8 feet	Running Slope	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
95191	536.7 to 537.7 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **LIGHTHOUSE DR** *Starting at:* **SHANNON AVE** **$102,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101344	LILLY ST	309 LILLY ST	WASHINGTON ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131747	0.1 to 1.1 feet	**Vertical Change**	-.6"	5 ft	5	SF	$75	**$375**
131753	1.3 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131748	1.9 to 2.9 feet	**Vertical Change**	.53"	5 ft	5	REF		
131749	5.4 to 8.6 feet	**Vertical Change**	.27"	5 ft	16	LF	$75	**$1,200**
131750	9.3 to 10.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
131754	11.2 to 18.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
131751	11.6 to 12.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
131755	20.3 to 24.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
131758	24.4 to 85.7 feet	Key Note Segment		5 ft	307			
131752	64.2 to 65.2 feet	**Vertical Change**	2.63"	5 ft	5	REF		
131756	88.8 to 89.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
131757	92.4 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **309 LILLY ST** **$11,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101340	LILLY ST	314 LILLY ST	328 LILLY ST	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131739	0.5 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	16	SF	$120	**$1,932**
131744	3.1 to 14.9 feet	Key Note Segment		7 ft	83			
131740	16.8 to 19.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	17	SF	$120	**$2,016**
131741	25.2 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	90	SF	$120	**$10,836**
131742	44.0 to 50.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	43	SF	$120	**$5,208**
131743	56.7 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	84	SF	$120	**$10,080**
131745	69.1 to 78.8 feet	Key Note Segment		7 ft	68			
131746	109.4 to 123.2 feet	Key Note Segment		7 ft	97			
131738	113.5 to 114.5 feet	**Vertical Change**	.39"	7 ft	7	REF		

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **314 LILLY ST** **$30,072.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101536	LILLY ST	601 LILLY ST	601 LILLY ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57364	0.9 to 45.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	336	SF	$120	**$40,320**
57365	49.5 to 56.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	50	SF	$120	**$6,030**
57366	56.2 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,600**
57367	62.1 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	390	SF	$120	**$46,800**
57368	115.6 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	555	SF	$120	**$66,600**
57369	189.8 to 193.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	24	SF	$120	**$2,880**
57370	193.8 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	135	SF	$120	**$16,200**
57362	211.3 to 212.3 feet	**Vertical Change**	.28"	8 ft	8	REF		

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **601 LILLY ST** **$182,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101541	LILLY ST	601 LILLY ST	CLINTON ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57378	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	33	SF	$120	**$3,960**
57379	4.9 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,060**
57380	10.9 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	93	SF	$120	**$11,160**
57381	25.8 to 31.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	46	SF	$120	**$5,490**
57382	31.9 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	343	SF	$120	**$41,130**
57383	80.8 to 85.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	38	SF	$120	**$4,590**
57384	109.0 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,970**
57409	112.8 to 137.8 feet	Key Note Segment		8 ft	188			
57371	115.1 to 116.1 feet	**Vertical Change**	.39"	8 ft	8	REF		
57385	137.8 to 141.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	26	SF	$40	**$1,050**
57386	141.3 to 168.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	202	SF	$120	**$24,210**
57387	170.8 to 202.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	241	SF	$120	**$28,890**
57388	205.1 to 267.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	467	SF	$120	**$55,980**
57372	255.7 to 256.7 feet	**Vertical Change**	.26"	8 ft	8	REF		
57389	272.4 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	254	SF	$120	**$30,510**
57390	309.9 to 318.7 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	66	SF	$120	**$7,920**
57410	318.8 to 343.2 feet	Key Note Segment		8 ft	183			
57391	344.3 to 363.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	147	SF	$120	**$17,640**
57373	367.5 to 368.5 feet	**Vertical Change**	-.28"	8 ft	8	REF		
57392	367.5 to 392.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	190	SF	$120	**$22,770**
57374	372.3 to 373.3 feet	**Vertical Change**	1.69"	8 ft	8	REF		
57411	392.8 to 434.3 feet	Key Note Segment		8 ft	311			
57375	404.4 to 405.4 feet	**Vertical Change**	.52"	8 ft	8	REF		
57393	435.1 to 476.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	311	SF	$120	**$37,350**
57394	478.8 to 481.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	19	SF	$120	**$2,250**
57395	483.8 to 485.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	**$1,710**
57396	486.8 to 498.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	89	SF	$120	**$10,710**
57397	501.3 to 524.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	171	SF	$120	**$20,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101541	LILLY ST	601 LILLY ST	CLINTON ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57398	526.9 to 563.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	273	SF	$120	**$32,760**
57376	539.1 to 540.1 feet	**Vertical Change**	-.29"	8 ft	8	REF		
57399	566.6 to 587.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	157	SF	$120	**$18,810**
57400	587.5 to 588.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$990**
57401	591.2 to 613.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	167	SF	$120	**$20,070**
57402	615.4 to 654.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	295	SF	$120	**$35,370**
57403	655.1 to 676.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	161	SF	$120	**$19,260**
57412	678.3 to 703.5 feet	Key Note Segment		8 ft	189			
57404	703.5 to 735.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	242	SF	$40	**$9,690**
57405	736.6 to 739.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,430**
57377	738.7 to 739.7 feet	**Vertical Change**	-.28"	8 ft	8	REF		
57406	742.4 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,260**
57413	744.8 to 766.7 feet	Key Note Segment		8 ft	164			
57407	766.7 to 768.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	11	SF	$40	**$450**
57408	771.1 to 787.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	126	SF	$120	**$15,120**
57414	786.8 to 788.3 feet		5.0-6.0%	8 ft	11			

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **601 LILLY ST** **$490,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101455	LILLY ST	736 LILLY ST	SUNRISE AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56983	0.0 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
56984	13.6 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
57024	18.4 to 35.2 feet	Key Note Segment		5 ft	84			
56970	27.0 to 28.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
56971	43.1 to 44.1 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
57025	46.4 to 63.3 feet	Key Note Segment		5 ft	85			
56972	47.5 to 48.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
56985	63.8 to 72.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
56986	73.8 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
56973	96.4 to 97.4 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
56987	101.4 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
57026	110.8 to 126.8 feet	Key Note Segment		5 ft	80			
56988	126.8 to 136.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	47	SF	$40	**$1,880**
57027	136.8 to 153.9 feet	Key Note Segment		5 ft	85			
56974	152.5 to 153.5 feet	**Vertical Change**	.65"	5 ft	5	REF		
56989	180.8 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
56976	187.7 to 188.7 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
57028	199.5 to 215.8 feet	Key Note Segment		5 ft	82			
56977	207.8 to 208.8 feet	**Vertical Change**	.55"	5 ft	5	REF		
57029	226.4 to 242.0 feet	Key Note Segment		5 ft	78			
56990	252.4 to 254.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
57030	254.1 to 263.4 feet	Key Note Segment		5 ft	46			
56991	264.9 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
57031	267.3 to 277.4 feet	Key Note Segment		5 ft	50			
56992	277.4 to 288.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	54	SF	$40	**$2,140**
57032	290.3 to 305.8 feet	Key Note Segment		5 ft	78			
56978	290.6 to 291.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56993	305.8 to 310.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	23	SF	$40	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101455	LILLY ST	736 LILLY ST	SUNRISE AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56994	310.3 to 330.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
56995	332.3 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
57033	335.2 to 359.3 feet	Key Note Segment		5 ft	121			
56996	369.0 to 370.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56997	391.1 to 392.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
56998	399.7 to 405.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
56999	413.5 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
57000	423.5 to 435.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
56979	427.7 to 428.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
57001	438.0 to 449.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
57002	449.8 to 481.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
57003	482.8 to 503.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,660**
57004	503.9 to 515.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
57005	517.3 to 525.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
57035	521.8 to 523.6 feet		5.0-6.0%	5 ft	9			
57034	525.2 to 553.6 feet	Key Note Segment		5 ft	142			
57006	553.6 to 563.1 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	48	SF	$40	**$1,900**
57007	564.8 to 569.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
57008	569.7 to 578.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	42	SF	$120	**$5,040**
57009	578.1 to 579.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
57010	579.5 to 580.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
57011	582.3 to 583.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
57012	589.2 to 618.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,460**
57013	642.2 to 644.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
57014	648.8 to 654.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
57015	655.8 to 661.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
57016	661.7 to 669.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
57017	671.1 to 677.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101455	LILLY ST	736 LILLY ST	SUNRISE AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57018	705.0 to 709.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
57019	715.2 to 724.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
57020	724.4 to 733.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
57021	733.5 to 738.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
57022	746.4 to 755.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
56982	759.4 to 760.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
57023	760.3 to 766.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
57036	780.3 to 782.8 feet		5.0-6.0%	5 ft	13			
57037	780.3 to 782.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **736 LILLY ST** **$190,165.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101350	LILLY ST	801 LILLY ST	106 LILLY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131793	0.9 to 4.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
131794	4.0 to 14.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
131790	7.5 to 8.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
131795	17.0 to 25.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
131791	24.0 to 25.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
131796	29.2 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
131797	47.6 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
131792	55.9 to 56.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
131798	56.8 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**
131800	62.6 to 63.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
131799	83.9 to 85.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **801 LILLY ST** **$45,279.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101440	LILLY ST	CANAL ST	LILLY ST	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56903	2.5 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	202	SF	$120	**$24,240**
56901	11.4 to 12.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
56904	43.7 to 51.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
56905	54.3 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
56902	55.1 to 56.1 feet	**Vertical Change**	1.92"	5 ft	5	REF		
56906	59.6 to 63.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
56907	68.0 to 88.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,540**
56908	89.3 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
56909	96.0 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
56910	112.8 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
56911	118.6 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
56912	126.3 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **CANAL ST** **$58,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121305	LILLY ST	CANAL ST	SAWMILL ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60625	0.0 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
60678	0.0 to 1.3 feet		6.0-7.0%	5 ft	7			
60663	2.7 to 20.6 feet	Key Note Segment		5 ft	90			
60614	3.0 to 4.0 feet	**Vertical Change**	.64"	5 ft	5	REF		
60626	30.9 to 33.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
60615	31.1 to 32.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
60627	37.1 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
60628	46.5 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
60629	56.1 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
60664	58.3 to 73.8 feet	Key Note Segment		5 ft	78			
60630	73.8 to 81.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
60665	86.8 to 102.9 feet	Key Note Segment		5 ft	81			
60631	103.8 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
60616	116.2 to 117.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
60632	132.9 to 150.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
60633	150.8 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
60634	165.0 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
60666	174.1 to 189.8 feet	Key Note Segment		5 ft	79			
60617	175.4 to 176.4 feet	**Vertical Change**	.7"	5 ft	5	REF		
60635	189.8 to 191.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
60667	200.4 to 216.0 feet	Key Note Segment		5 ft	78			
60636	216.0 to 227.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
60668	259.7 to 274.9 feet	Key Note Segment		5 ft	76			
60618	275.6 to 276.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
60637	278.9 to 283.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
60669	285.3 to 301.1 feet	Key Note Segment		5 ft	79			
60619	294.1 to 295.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
60638	301.2 to 314.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121305	LILLY ST	CANAL ST	SAWMILL ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60639	318.3 to 323.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
60640	340.8 to 345.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
60670	345.4 to 361.4 feet	Key Note Segment		5 ft	80			
60641	363.3 to 371.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
60671	371.7 to 387.4 feet	Key Note Segment		5 ft	79			
60642	391.7 to 398.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
60643	405.9 to 408.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
60644	411.0 to 412.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
60645	413.8 to 416.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
60646	426.5 to 431.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
60672	431.4 to 447.7 feet	Key Note Segment		5 ft	82			
60647	448.5 to 451.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	17	SF	$40	**$680**
60620	449.5 to 450.5 feet	**Vertical Change**	3.16"	5 ft	5	REF		
60648	452.2 to 453.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
60649	456.1 to 457.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
60673	458.2 to 474.2 feet	Key Note Segment		5 ft	80			
60650	474.2 to 475.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
60651	475.9 to 479.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
60652	485.2 to 494.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
60653	498.0 to 517.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
60621	501.7 to 502.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
60674	517.5 to 533.5 feet	Key Note Segment		5 ft	80			
60654	535.2 to 542.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
60675	543.3 to 558.7 feet	Key Note Segment		5 ft	77			
60655	558.7 to 562.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	20	SF	$40	**$820**
60656	565.0 to 573.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
60657	581.1 to 584.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
60658	587.8 to 593.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121305	LILLY ST	CANAL ST	SAWMILL ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60622	593.4 to 594.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
60659	596.8 to 603.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
60676	604.0 to 619.3 feet	Key Note Segment		5 ft	76			
60623	611.8 to 612.8 feet	Vertical Change	.29"	5 ft	5	REF		
60660	620.8 to 622.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
60677	630.4 to 645.6 feet	Key Note Segment		5 ft	76			
60661	646.1 to 655.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	48	SF	$40	$1,920
60662	658.3 to 670.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
60624	668.8 to 669.8 feet	Vertical Change	.37"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **CANAL ST** **$128,230.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111014	LILLY ST	CARRY AVE	LILLY ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57981	0.5 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	130	SF	$120	**$15,552**
57977	1.1 to 2.1 feet	**Vertical Change**	.61"	4 ft	4	REF		
57982	32.9 to 56.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	94	SF	$120	**$11,232**
57983	58.7 to 71.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	52	SF	$120	**$6,192**
57978	65.1 to 66.1 feet	**Vertical Change**	1.26"	4 ft	4	REF		
57984	95.8 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
57979	121.1 to 122.1 feet	**Vertical Change**	.92"	4 ft	4	SF	$75	**$300**
57985	122.6 to 138.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,392**
57986	141.9 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
57980	150.2 to 151.2 feet	**Vertical Change**	.28"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **LILLY ST** *Starting at:* **CARRY AVE** **$49,692.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110910	LILLY ST	KNOX AVE	LILLY ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57523	0.1 to 2.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
57524	28.9 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
57510	30.5 to 31.5 feet	**Vertical Change**	.33"	4 ft	4	REF		
57546	31.8 to 41.4 feet	Key Note Segment		4 ft	38			
57525	41.7 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
57526	47.3 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
57547	52.7 to 61.7 feet	Key Note Segment		4 ft	36			
57511	62.1 to 63.1 feet	**Vertical Change**	-.29"	4 ft	4	REF		
57512	64.0 to 65.0 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
57527	67.1 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
57528	73.6 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
57529	97.2 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
57530	106.4 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
57531	111.3 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
57513	116.3 to 117.3 feet	**Vertical Change**	.64"	4 ft	4	SF	$75	**$300**
57532	122.4 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
57514	125.3 to 126.3 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
57533	132.1 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
57548	135.2 to 144.8 feet	Key Note Segment		4 ft	38			
57534	146.4 to 152.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
57549	156.0 to 165.5 feet	Key Note Segment		4 ft	38			
57515	180.2 to 181.2 feet	**Vertical Change**	-.37"	4 ft	4	LF	$75	**$300**
57516	197.4 to 198.4 feet	**Vertical Change**	-.63"	4 ft	4	SF	$75	**$300**
57535	202.8 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
57517	228.6 to 229.6 feet	**Vertical Change**	.51"	4 ft	4	SF	$75	**$300**
57550	238.5 to 247.8 feet	Key Note Segment		4 ft	37			
57536	248.0 to 252.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	20	SF	$40	**$784**
57537	253.3 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110910	LILLY ST	KNOX AVE	LILLY ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57538	257.8 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
57551	259.9 to 269.3 feet	Key Note Segment		4 ft	38			
57539	305.6 to 321.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,440**
57552	341.7 to 351.8 feet	Key Note Segment		4 ft	40			
57540	354.8 to 362.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,552**
57553	362.2 to 371.8 feet	Key Note Segment		4 ft	38			
57541	371.8 to 421.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	200	SF	$40	**$7,984**
57518	372.0 to 373.0 feet	**Vertical Change**	-.31"	4 ft	4	REF		
57519	426.6 to 427.6 feet	**Vertical Change**	.93"	4 ft	4	REF		
57542	426.6 to 428.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
57520	444.1 to 447.2 feet	**Vertical Change**	.35"	4 ft	12	LF	$75	**$930**
57554	445.4 to 454.3 feet	Key Note Segment		4 ft	36			
57543	457.0 to 460.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
57555	465.4 to 476.2 feet	Key Note Segment		4 ft	43			
57544	476.2 to 489.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	53	SF	$40	**$2,112**
57521	482.4 to 483.4 feet	**Vertical Change**	.63"	4 ft	4	REF		
57545	489.4 to 506.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	68	SF	$120	**$8,112**
57522	507.9 to 508.9 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **LILLY ST** *Starting at:* **KNOX AVE** **$65,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101534	LILLY ST	KOUFAX DR	PARKING LOT ENTRANCE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57342	0.8 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	198	SF	$120	**$23,760**
57343	32.8 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	**$4,320**
57344	41.0 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	175	SF	$120	**$20,970**
57345	66.8 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	**$2,790**
57346	73.3 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	369	SF	$120	**$44,280**
57336	119.5 to 120.5 feet	**Vertical Change**	.28"	8 ft	8	REF		
57347	125.3 to 129.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	32	SF	$120	**$3,780**
57348	129.5 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	46	SF	$120	**$5,580**
57349	136.8 to 157.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	155	SF	$120	**$18,630**
57350	158.8 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	64	SF	$120	**$7,650**
57351	169.9 to 194.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	186	SF	$120	**$22,320**
57352	195.8 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	368	SF	$120	**$44,100**
57353	246.0 to 263.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	131	SF	$120	**$15,750**
57354	263.5 to 356.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	695	SF	$120	**$83,430**
57337	287.0 to 288.0 feet	**Vertical Change**	-.37"	8 ft	8	REF		
57355	357.5 to 364.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	52	SF	$120	**$6,210**
57356	364.4 to 368.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,600**
57357	369.4 to 401.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	241	SF	$120	**$28,890**
57338	378.2 to 379.2 feet	**Vertical Change**	.63"	8 ft	8	REF		
57339	391.1 to 392.1 feet	**Vertical Change**	.28"	8 ft	8	REF		
57358	404.3 to 409.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,860**
57359	409.7 to 413.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	31	SF	$120	**$3,690**
57361	415.7 to 445.5 feet	Key Note Segment		8 ft	224			
57340	416.7 to 417.7 feet	**Vertical Change**	.29"	8 ft	8	REF		
57341	431.1 to 432.1 feet	**Vertical Change**	.3"	8 ft	8	REF		
57360	445.5 to 464.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	139	SF	$40	**$5,550**

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **KOUFAX DR** **$350,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108110917	LILLY ST	LILLY ST	SUNRISE AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57556	0.5 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
57557	10.6 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
57558	18.8 to 26.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
57559	26.5 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
57560	52.6 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
57561	82.3 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
57562	191.3 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
57568	204.0 to 237.3 feet	Key Note Segment		5 ft	167			
57563	239.2 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
57564	323.2 to 324.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
57565	345.5 to 348.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
57566	365.3 to 369.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
57567	403.1 to 404.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **LILLY ST** *Starting at:* **LILLY ST** **$28,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111019	LILLY ST	LILLY ST	KNOX AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57987	17.4 to 18.4 feet	Vertical Change	.26"	4 ft	4	LF	$75	$300
58004	20.6 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
58005	29.5 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$672
58021	31.8 to 41.8 feet	Key Note Segment		4 ft	40			
58006	42.0 to 58.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	67	SF	$40	$2,688
58007	80.9 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,112
58022	86.2 to 95.7 feet	Key Note Segment		4 ft	38			
57988	95.6 to 96.6 feet	Vertical Change	.34"	4 ft	4	REF		
58008	99.3 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	$3,552
58023	106.7 to 115.8 feet	Key Note Segment		4 ft	36			
58009	115.8 to 131.7 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	64	SF	$40	$2,544
57989	123.4 to 124.4 feet	Vertical Change	.84"	4 ft	4	REF		
57990	133.9 to 134.9 feet	Vertical Change	1.09"	4 ft	4	SF	$75	$300
58010	137.8 to 155.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	$8,256
57991	149.9 to 150.9 feet	Vertical Change	2.93"	4 ft	4	REF		
58024	158.1 to 167.6 feet	Key Note Segment		4 ft	38			
58011	186.8 to 188.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	$576
58012	190.8 to 194.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
58025	194.0 to 202.5 feet	Key Note Segment		4 ft	34			
57992	211.8 to 212.8 feet	Vertical Change	-.3"	4 ft	4	LF	$75	$300
58026	215.1 to 224.1 feet	Key Note Segment		4 ft	36			
58013	233.3 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	$8,880
58014	254.5 to 270.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	$7,824
57993	264.2 to 265.2 feet	Vertical Change	2.51"	4 ft	4	REF		
58015	274.0 to 275.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$720
58016	275.8 to 277.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$768
58017	292.0 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	$4,464
57994	293.2 to 294.2 feet	Vertical Change	.3"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111019	LILLY ST	LILLY ST	KNOX AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58027	301.3 to 311.1 feet	Key Note Segment		4 ft	39			
57995	302.7 to 303.7 feet	Vertical Change	.49"	4 ft	4	REF		
58018	311.1 to 323.6 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	50	SF	$40	$2,000
57996	317.8 to 318.8 feet	Vertical Change	.26"	4 ft	4	REF		
58028	323.6 to 332.5 feet	Key Note Segment		4 ft	36			
57997	324.4 to 325.4 feet	Vertical Change	.26"	4 ft	4	REF		
57998	333.0 to 334.0 feet	Vertical Change	-.5"	4 ft	4	SF	$75	$300
57999	350.2 to 351.2 feet	Vertical Change	.44"	4 ft	4	LF	$75	$300
58000	367.4 to 368.4 feet	Vertical Change	-.68"	4 ft	4	SF	$75	$300
58001	401.8 to 402.8 feet	Vertical Change	-.33"	4 ft	4	LF	$75	$300
58029	410.2 to 419.0 feet	Key Note Segment		4 ft	35			
58030	431.1 to 441.4 feet	Key Note Segment		4 ft	41			
58019	472.7 to 474.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$1,008
58031	476.2 to 477.6 feet		6.0-7.0%	4 ft	6			
58003	477.2 to 478.2 feet	Vertical Change	-.32"	4 ft	4	REF		
58032	477.6 to 479.2 feet		5.0-6.0%	4 ft	6			
58020	477.7 to 480.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296

TOTAL COST FOR: N *side of* **LILLY ST** *Starting at:* **LILLY ST** **$52,532.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101444	LILLY ST	LILLY ST	SAWMILL ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56919	0.0 to 21.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,660**
56920	22.3 to 24.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
56921	24.3 to 25.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
56922	27.3 to 40.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,680**
56913	35.5 to 36.5 feet	**Vertical Change**	2.34"	5 ft	5	REF		
56923	42.4 to 46.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
56924	47.2 to 62.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
56925	62.4 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
56926	73.8 to 81.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
56914	81.9 to 82.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
56927	83.5 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
56928	98.8 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
56929	120.8 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
56930	122.8 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
56931	130.5 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
56932	144.1 to 147.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**
56933	150.1 to 160.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
56934	164.1 to 173.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
56935	177.8 to 185.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
56936	186.0 to 193.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
56937	197.8 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
56915	226.0 to 227.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
56938	233.9 to 238.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
56939	239.3 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56940	243.3 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
56941	271.3 to 272.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
56942	275.6 to 294.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
56943	294.7 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101444	LILLY ST	LILLY ST	SAWMILL ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56944	307.1 to 311.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
56916	313.6 to 314.6 feet	**Vertical Change**	.8"	5 ft	5	SF	$75	**$375**
56917	331.3 to 332.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
56918	341.4 to 342.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
56945	358.9 to 364.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
56946	366.6 to 372.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
56947	379.8 to 397.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
56948	397.7 to 401.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
56949	404.1 to 412.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
56950	414.6 to 418.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
56951	420.8 to 425.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
56952	429.3 to 438.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **LILLY ST** **$176,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101514	LILLY ST	PODRES LN	KOUFAX DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57157	0.9 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
57181	14.6 to 35.9 feet	Key Note Segment		5 ft	107			
57138	24.9 to 25.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
57139	33.0 to 34.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
57158	36.5 to 53.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	87	SF	$40	**$3,460**
57159	53.8 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
57182	58.2 to 79.3 feet	Key Note Segment		5 ft	106			
57140	68.0 to 69.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
57160	80.4 to 84.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
57183	89.3 to 110.6 feet	Key Note Segment		5 ft	107			
57141	107.5 to 108.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
57161	110.7 to 115.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$960**
57162	116.0 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
57163	121.6 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
57164	125.3 to 126.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
57165	128.3 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
57166	143.3 to 148.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
57167	148.0 to 151.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
57142	151.6 to 152.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
57184	151.6 to 171.8 feet	Key Note Segment		5 ft	101			
57143	161.0 to 162.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
57144	171.8 to 172.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
57168	173.2 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
57185	181.9 to 204.9 feet	Key Note Segment		5 ft	115			
57145	186.3 to 187.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
57169	205.1 to 226.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	107	SF	$40	**$4,280**
57146	220.9 to 221.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
57170	230.0 to 233.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101514	LILLY ST	PODRES LN	KOUFAX DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57171	233.6 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
57186	243.8 to 265.3 feet	Key Note Segment		5 ft	108			
57147	244.3 to 245.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
57148	254.0 to 255.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
57149	265.2 to 266.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
57172	265.8 to 267.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
57173	268.3 to 289.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
57150	284.2 to 285.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
57187	289.7 to 311.0 feet	Key Note Segment		5 ft	107			
57152	303.8 to 304.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
57174	312.8 to 319.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
57175	319.7 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
57153	334.4 to 335.4 feet	**Vertical Change**	.99"	5 ft	5	REF		
57188	336.8 to 358.1 feet	Key Note Segment		5 ft	107			
57154	355.1 to 356.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
57176	358.8 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
57177	375.8 to 382.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
57189	382.9 to 404.2 feet	Key Note Segment		5 ft	107			
57155	383.8 to 384.8 feet	**Vertical Change**	.57"	5 ft	5	REF		
57156	403.9 to 404.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
57178	404.3 to 405.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
57179	405.5 to 410.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
57190	410.8 to 431.8 feet	Key Note Segment		5 ft	105			
57180	431.8 to 448.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	86	SF	$40	**$3,420**

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **PODRES LN** **$97,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101446	LILLY ST	SAWMILL ST	665 SOQUEL CT	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56956	0.0 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
56957	9.2 to 30.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
56958	32.3 to 64.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	161	SF	$120	**$19,320**
56959	67.8 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
56960	86.3 to 100.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
56961	101.4 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
56962	124.6 to 142.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
56953	126.5 to 127.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
56963	142.6 to 147.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,060**
56964	149.3 to 152.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
56954	150.3 to 151.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
56965	153.2 to 158.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	27	SF	$120	**$3,240**
56966	160.1 to 162.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
56967	165.6 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
56955	170.6 to 171.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
56968	170.8 to 172.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **SAWMILL ST** **$90,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101500	LILLY ST	SUNRISE AVE	KOUFAX DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57043	0.3 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	121	SF	$120	**$14,496**
57044	49.9 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	126	SF	$120	**$15,168**
57045	66.2 to 87.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	169	SF	$120	**$20,256**
57046	87.3 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	116	SF	$120	**$13,920**
57047	112.0 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	147	SF	$120	**$17,664**
57039	124.8 to 125.8 feet	**Vertical Change**	-.3"	8 ft	8	REF		
57048	130.4 to 139.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	76	SF	$120	**$9,120**
57049	140.6 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	134	SF	$120	**$16,128**
57050	174.1 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	196	SF	$120	**$23,520**
57051	199.2 to 210.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	88	SF	$120	**$10,560**
57052	210.2 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	31	SF	$120	**$3,744**
57053	216.8 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	**$2,880**
57054	227.6 to 231.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
57055	235.5 to 246.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	88	SF	$120	**$10,560**
57056	249.3 to 272.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	185	SF	$120	**$22,176**
57057	274.3 to 278.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,552**
57058	301.3 to 314.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	109	SF	$120	**$13,056**
57059	314.9 to 327.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	103	SF	$120	**$12,384**
57060	329.8 to 333.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,168**
57061	355.3 to 360.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,896**
57062	366.5 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	61	SF	$120	**$7,296**
57041	373.3 to 374.3 feet	**Vertical Change**	.42"	8 ft	8	REF		
57063	376.6 to 377.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	10	SF	$120	**$1,248**
57064	381.8 to 389.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	58	SF	$120	**$6,912**
57065	389.0 to 390.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	15	SF	$120	**$1,824**
57066	396.2 to 402.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	47	SF	$120	**$5,664**
57067	422.1 to 431.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,832**
57068	431.3 to 435.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	37	SF	$120	**$4,416**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101500	LILLY ST	SUNRISE AVE	KOUFAX DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57069	438.6 to 441.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	24	SF	$120	**$2,880**
57042	439.1 to 440.1 feet	**Vertical Change**	.65"	8 ft	8	REF		
57070	444.1 to 452.7 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	69	SF	$120	**$8,256**
57071	453.6 to 462.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	71	SF	$120	**$8,544**
57072	464.9 to 474.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	79	SF	$120	**$9,504**
57073	474.8 to 478.7 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	31	SF	$120	**$3,744**
57074	478.7 to 486.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	65	SF	$120	**$7,776**

TOTAL COST FOR: NE *side of* **LILLY ST** *Starting at:* **SUNRISE AVE** **$297,984.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111003	LILLY ST	SUNRISE AVE	CARRY AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57860	0.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
57861	3.5 to 5.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	10	SF	$120	**$1,152**
57854	6.9 to 7.9 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**
57862	8.2 to 9.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$768**
57863	9.8 to 14.1 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	17	SF	$120	**$2,064**
57856	11.8 to 12.8 feet	**Vertical Change**	1.38"	4 ft	4	REF		
57857	15.0 to 16.0 feet	**Vertical Change**	-1.79"	4 ft	4	REF		
57864	15.8 to 18.3 feet	Cross Slope (PAR)	9.0-10.0%	4 ft	10	SF	$120	**$1,200**
57865	18.3 to 21.3 feet	Cross Slope (PAR)	11.0-12.0%	4 ft	12	SF	$120	**$1,440**
57858	22.0 to 23.0 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
57866	25.9 to 41.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	64	SF	$120	**$7,632**
57867	44.8 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	135	SF	$120	**$16,176**
57868	79.3 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
57869	84.9 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**
57870	99.2 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
57871	115.4 to 143.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	112	SF	$120	**$13,440**
57872	143.4 to 148.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,400**
57873	148.6 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
57859	151.1 to 152.1 feet	**Vertical Change**	-.66"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **LILLY ST** *Starting at:* **SUNRISE AVE** **$63,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101337	LILLY ST	WASHINGTON ST	304 LILLY ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131724	0.0 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,504**
131725	7.3 to 17.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	40	SF	$40	**$1,600**
131726	20.6 to 30.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	39	SF	$120	**$4,656**
131721	28.5 to 29.5 feet	**Vertical Change**	.32"	4 ft	4	REF		
131727	30.7 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,448**
131722	37.2 to 38.2 feet	**Vertical Change**	.88"	4 ft	4	REF		
131736	48.3 to 60.4 feet	Key Note Segment		4 ft	48			
131728	65.2 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	**$3,840**
131729	74.4 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
131730	79.5 to 81.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$960**
131737	82.3 to 95.3 feet	Key Note Segment		4 ft	52			
131731	97.2 to 103.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,168**
131732	107.1 to 116.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	36	SF	$120	**$4,272**
131733	118.3 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
131723	118.6 to 119.6 feet	**Vertical Change**	.35"	4 ft	4	REF		
131734	122.9 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
131735	138.2 to 140.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**

TOTAL COST FOR: SW *side of* **LILLY ST** *Starting at:* **WASHINGTON ST** **$40,288.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201257	LIME AVE	2055 LIME AVE	GEORGIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105370	0.0 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
105371	5.8 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
105379	14.1 to 32.3 feet	Key Note Segment		5 ft	91			
105372	34.3 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
105362	45.2 to 46.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
105363	51.4 to 52.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
105373	70.6 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
105380	80.8 to 99.4 feet	Key Note Segment		5 ft	93			
105364	101.1 to 102.1 feet	**Vertical Change**	1.66"	5 ft	5	REF		
105374	101.3 to 107.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
105381	107.7 to 128.0 feet	Key Note Segment		5 ft	102			
105366	118.0 to 119.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
105367	127.5 to 128.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
105375	128.8 to 131.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
105376	132.1 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
105382	155.5 to 174.7 feet	Key Note Segment		5 ft	96			
105368	170.0 to 171.0 feet	**Vertical Change**	.72"	5 ft	5	REF		
105377	176.7 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105369	182.3 to 183.3 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
105378	184.8 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: E *side of* **LIME AVE** *Starting at:* **2055 LIME AVE** **$57,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201349	LIME AVE	GEORGIA AVE	SAN BRUNO AVE	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105559	0.0 to 59.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	297	SF	$120	**$35,640**
105557	7.0 to 8.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
105558	59.4 to 60.4 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **LIME AVE** *Starting at:* **GEORGIA AVE** **$35,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201245	LIME AVE	GEORGIA AVE	MANGO AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105318	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105319	3.2 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
105308	4.0 to 5.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
105320	4.8 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
105321	8.4 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
105322	18.6 to 25.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
105323	27.2 to 31.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
105324	35.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
105325	45.3 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
105326	54.3 to 73.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
105327	73.9 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
105309	74.1 to 75.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
105310	86.2 to 87.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
105328	92.2 to 95.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
105339	97.4 to 117.0 feet	Key Note Segment		5 ft	98			
105311	117.5 to 118.5 feet	**Vertical Change**	.9"	5 ft	5	SF	$75	**$375**
105329	118.9 to 130.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
105330	131.3 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
105340	143.9 to 165.8 feet	Key Note Segment		5 ft	110			
105312	144.7 to 145.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
105331	167.3 to 168.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
105332	168.6 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
105341	173.5 to 193.3 feet	Key Note Segment		5 ft	99			
105333	194.0 to 202.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
105334	203.7 to 222.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
105335	225.8 to 230.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
105336	233.8 to 240.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
105342	240.8 to 260.3 feet	Key Note Segment		5 ft	98			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201245	LIME AVE	GEORGIA AVE	MANGO AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105314	260.5 to 261.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
105337	261.8 to 273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
105315	271.0 to 272.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
105343	273.6 to 294.8 feet	Key Note Segment		5 ft	106			
105316	280.7 to 281.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
105317	287.1 to 288.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105338	306.7 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: W *side of* **LIME AVE** *Starting at:* **GEORGIA AVE** **$99,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201254	LIME AVE	MANGO AVE	2065 LIME AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105350	0.0 to 11.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
105351	12.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
105359	37.3 to 56.6 feet	Key Note Segment		5 ft	97			
105344	37.9 to 38.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
105345	47.5 to 48.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
105346	56.9 to 57.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
105352	57.3 to 58.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$240**
105353	62.5 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
105347	66.1 to 67.1 feet	**Vertical Change**	.81"	5 ft	5	REF		
105360	80.8 to 102.2 feet	Key Note Segment		5 ft	107			
105354	103.2 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
105355	104.6 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
105348	108.2 to 109.2 feet	**Vertical Change**	.6"	5 ft	5	REF		
105356	134.3 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
105349	134.4 to 135.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
105357	141.8 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
105358	146.3 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**

TOTAL COST FOR: E *side of* **LIME AVE** *Starting at:* **MANGO AVE** **$55,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201240	LIME AVE	SAN BRUNO AVE	GEORGIA AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105298	0.0 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
105299	7.1 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
105292	25.6 to 26.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
105300	37.7 to 82.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	225	SF	$120	**$27,000**
105293	37.9 to 38.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
105301	84.0 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
105306	89.3 to 90.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
105307	96.3 to 97.3 feet	**Protruding Object**	36"	5 ft	5	JOB	$99	**$99**
105294	105.3 to 111.2 feet	**Vertical Change**	.26"	5 ft	30	REF		
105302	110.1 to 113.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
105303	114.3 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
105295	117.2 to 118.2 feet	**Vertical Change**	.5"	5 ft	5	REF		
105304	129.8 to 135.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
105305	137.3 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
105296	138.7 to 139.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
105297	148.8 to 149.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **LIME AVE** *Starting at:* **SAN BRUNO AVE** **$85,413.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191106	LINDA MESA DR	1416 LINDA MESA DR	SAN GABRIEL DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73288	0.0 to 5.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
73289	7.7 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
73290	22.1 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
73291	30.3 to 38.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
73292	41.3 to 42.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
73312	42.6 to 62.0 feet	Key Note Segment		5 ft	97			
73280	43.4 to 44.4 feet	**Vertical Change**	.46"	5 ft	5	REF		
73293	63.3 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
73313	69.5 to 89.3 feet	Key Note Segment		5 ft	99			
73294	89.4 to 90.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
73295	90.5 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
73296	97.2 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
73281	114.8 to 115.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
73297	126.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
73298	134.6 to 142.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
73299	142.8 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
73314	145.7 to 165.7 feet	Key Note Segment		5 ft	100			
73282	156.3 to 157.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
73283	165.4 to 166.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
73300	165.8 to 173.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	40	SF	$40	**$1,580**
73315	173.7 to 193.7 feet	Key Note Segment		5 ft	100			
73301	196.3 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
73302	199.6 to 204.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
73303	205.3 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
73304	238.4 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
73316	250.8 to 270.7 feet	Key Note Segment		5 ft	100			
73305	275.2 to 276.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
73317	276.6 to 297.3 feet	Key Note Segment		5 ft	103			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191106	LINDA MESA DR	1416 LINDA MESA DR	SAN GABRIEL DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73306	300.9 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
73307	305.9 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
73284	307.4 to 308.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
73308	316.5 to 318.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
73285	317.2 to 318.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
73309	318.8 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
73318	328.5 to 348.9 feet	Key Note Segment		5 ft	102			
73286	329.8 to 330.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
73287	348.6 to 349.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
73310	350.3 to 357.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
73311	367.6 to 369.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: S *side of* **LINDA MESA DR** *Starting at:* **1416 LINDA MESA DR** **$97,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191103	LINDA MESA DR	RANCHO MIRAGE RD	1416 LINDA MESA DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73250	1.2 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
73251	14.4 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
73271	20.8 to 41.3 feet	Key Note Segment		5 ft	103			
73252	41.3 to 47.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,220**
73272	48.2 to 68.6 feet	Key Note Segment		5 ft	102			
73253	69.3 to 70.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
73254	72.6 to 107.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	176	SF	$120	**$21,120**
73240	77.2 to 78.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
73241	112.0 to 113.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
73255	115.3 to 122.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
73273	123.4 to 143.8 feet	Key Note Segment		5 ft	102			
73242	144.0 to 145.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
73256	144.4 to 150.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	32	SF	$40	**$1,280**
73274	150.9 to 170.0 feet	Key Note Segment		5 ft	96			
73243	170.3 to 171.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
73257	171.2 to 187.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
73258	196.4 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
73259	201.8 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
73260	205.4 to 212.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
73261	213.3 to 227.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
73275	227.7 to 247.2 feet	Key Note Segment		5 ft	98			
73244	228.8 to 229.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
73262	248.4 to 254.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
73276	254.6 to 274.3 feet	Key Note Segment		5 ft	99			
73245	274.6 to 275.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
73263	275.4 to 282.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
73264	285.0 to 293.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
73265	294.8 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191103	LINDA MESA DR	RANCHO MIRAGE RD	1416 LINDA MESA DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73246	305.0 to 306.0 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
73266	311.4 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
73247	319.3 to 320.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
73267	324.3 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
73279	330.0 to 331.4 feet		5.0-6.0%	5 ft	7			
73268	330.8 to 332.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
73277	332.6 to 351.7 feet	Key Note Segment		5 ft	96			
73269	352.0 to 358.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	31	SF	$40	$1,240
73278	358.2 to 378.3 feet	Key Note Segment		5 ft	101			
73248	359.3 to 360.3 feet	Vertical Change	.28"	5 ft	5	REF		
73249	368.8 to 369.8 feet	Vertical Change	.31"	5 ft	5	REF		
73270	379.1 to 384.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$2,940

TOTAL COST FOR: S *side of* **LINDA MESA DR** *Starting at:* **RANCHO MIRAGE RD** **$92,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191058	LINDA MESA DR	SAN GABRIEL DR	RANCHO MIRAGE RD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73178	0.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
73179	6.5 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
73180	10.3 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
73181	14.4 to 20.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
73225	21.5 to 41.9 feet	Key Note Segment		5 ft	102			
73182	42.5 to 69.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	135	SF	$40	**$5,420**
73183	70.7 to 72.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
73226	73.1 to 92.7 feet	Key Note Segment		5 ft	98			
73184	93.9 to 95.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
73185	98.0 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
73227	100.1 to 119.4 feet	Key Note Segment		5 ft	97			
73186	120.5 to 129.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
73187	132.7 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
73188	140.9 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
73189	150.3 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
73190	160.4 to 163.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
73191	168.3 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
73228	176.5 to 197.0 feet	Key Note Segment		5 ft	103			
73192	197.9 to 203.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
73229	204.3 to 224.2 feet	Key Note Segment		5 ft	100			
73193	224.8 to 236.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
73194	239.8 to 240.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
73195	243.0 to 253.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
73196	255.6 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
73197	263.8 to 269.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
73198	272.7 to 277.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
73199	278.2 to 280.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
73230	280.3 to 300.0 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191058	LINDA MESA DR	SAN GABRIEL DR	RANCHO MIRAGE RD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73200	301.1 to 307.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
73231	308.3 to 327.8 feet	Key Note Segment		5 ft	98			
73201	328.4 to 339.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	56	SF	$40	**$2,220**
73202	341.6 to 360.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
73203	362.6 to 366.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
73204	368.2 to 375.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
73205	376.2 to 381.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
73232	383.8 to 403.8 feet	Key Note Segment		5 ft	100			
73206	404.4 to 410.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	29	SF	$40	**$1,160**
73233	410.8 to 430.5 feet	Key Note Segment		5 ft	99			
73207	433.5 to 453.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
73208	458.0 to 459.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
73209	459.8 to 461.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
73210	466.1 to 469.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
73211	469.5 to 486.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	87	SF	$120	**$10,380**
73234	487.4 to 507.3 feet	Key Note Segment		5 ft	100			
73176	488.4 to 489.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
73212	507.8 to 511.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
73235	515.3 to 534.3 feet	Key Note Segment		5 ft	95			
73213	534.3 to 548.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	69	SF	$40	**$2,760**
73214	548.1 to 549.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
73215	553.2 to 565.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,140**
73216	567.8 to 588.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
73236	590.4 to 610.4 feet	Key Note Segment		5 ft	100			
73217	611.2 to 618.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
73237	618.9 to 638.0 feet	Key Note Segment		5 ft	96			
73218	638.8 to 654.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
73219	657.8 to 688.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191058	LINDA MESA DR	SAN GABRIEL DR	RANCHO MIRAGE RD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73220	688.9 to 694.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
73221	694.0 to 695.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
73238	695.3 to 714.8 feet	Key Note Segment		5 ft	98			
73222	715.0 to 720.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,080**
73239	721.5 to 740.6 feet	Key Note Segment		5 ft	96			
73223	742.1 to 743.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
73224	746.0 to 760.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**

TOTAL COST FOR: N *side of* **LINDA MESA DR** *Starting at:* **SAN GABRIEL DR** **$193,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121555	LINDEN ST	779 LINDEN ST	W PARK DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97302	0.0 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
97303	10.5 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
97308	19.3 to 35.3 feet	Key Note Segment		5 ft	80			
97304	39.2 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
97305	51.5 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
97306	55.3 to 58.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
97307	58.8 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
97309	64.4 to 65.4 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **LINDEN ST** *Starting at:* **779 LINDEN ST** **$20,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191202	LOMA LINDA LN	1403 LINDA MESA DR	RANCHO MIRAGE RD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73823	3.5 to 9.7 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	31	SF	$120	**$3,720**
73824	13.4 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
73825	29.0 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
73847	44.0 to 63.1 feet	Key Note Segment		5 ft	96			
73818	53.6 to 54.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
73826	64.2 to 70.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
73848	71.0 to 90.9 feet	Key Note Segment		5 ft	100			
73819	81.0 to 82.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
73827	92.2 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
73828	106.3 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
73829	123.9 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
73830	139.8 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
73849	146.8 to 166.8 feet	Key Note Segment		5 ft	100			
73831	168.5 to 171.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
73850	174.3 to 193.3 feet	Key Note Segment		5 ft	95			
73820	189.8 to 190.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
73832	194.8 to 197.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
73833	200.3 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
73834	203.0 to 206.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
73851	206.7 to 219.4 feet	Key Note Segment		5 ft	64			
73821	207.5 to 208.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
73835	224.4 to 231.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
73836	235.0 to 244.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
73837	244.8 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
73852	252.1 to 270.6 feet	Key Note Segment		5 ft	93			
73838	274.0 to 275.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
73839	276.6 to 278.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
73853	278.8 to 297.4 feet	Key Note Segment		5 ft	93			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191202	LOMA LINDA LN	1403 LINDA MESA DR	RANCHO MIRAGE RD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73840	299.3 to 300.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
73841	301.7 to 310.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
73842	315.8 to 324.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
73843	328.2 to 333.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
73854	334.1 to 353.2 feet	Key Note Segment		5 ft	96			
73822	352.3 to 353.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
73844	355.3 to 358.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
73845	362.2 to 384.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
73846	385.3 to 387.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
73855	386.3 to 387.5 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **LOMA LINDA LN** *Starting at:* **1403 LINDA MESA DR** **$104,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110191158	LOMA LINDA LN	CORONA DR	1403 LOMA LINDA LN	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73796	0.0 to 21.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,720**
73810	22.3 to 41.3 feet	Key Note Segment		5 ft	95			
73797	42.0 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
73811	48.9 to 68.1 feet	Key Note Segment		5 ft	96			
73798	68.8 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,380**
73812	93.8 to 113.1 feet	Key Note Segment		5 ft	97			
73799	114.0 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
73813	119.7 to 138.3 feet	Key Note Segment		5 ft	93			
73800	160.2 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
73814	163.0 to 181.4 feet	Key Note Segment		5 ft	92			
73794	181.2 to 182.2 feet	**Vertical Change**	-.56"	5 ft	5	REF		
73801	184.5 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
73802	194.7 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
73803	213.4 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
73815	217.3 to 237.9 feet	Key Note Segment		5 ft	103			
73804	237.9 to 244.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	32	SF	$40	**$1,260**
73805	246.9 to 255.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
73806	261.2 to 266.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
73807	266.9 to 268.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
73816	268.9 to 288.3 feet	Key Note Segment		5 ft	97			
73808	290.0 to 293.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
73817	295.8 to 315.3 feet	Key Note Segment		5 ft	98			
73795	315.4 to 316.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
73809	316.1 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**

TOTAL COST FOR: S/E/N *side of* **LOMA LINDA LN** *Starting at:* **CORONA DR** **$59,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191140	LOMA LINDA LN	RANCHO MIRAGE RD	RANCHO SANTA FE DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73668	0.0 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
73667	6.7 to 7.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
73669	17.4 to 31.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
73670	31.8 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
73671	66.0 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
73672	70.8 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
73673	74.4 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,660**
73674	92.9 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
73675	96.8 to 101.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
73676	103.6 to 111.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
73677	113.9 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
73678	120.5 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
73679	130.8 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
73680	140.8 to 141.8 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **LOMA LINDA LN** *Starting at:* **RANCHO MIRAGE RD** **$71,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191142	LOMA LINDA LN	RANCHO SANTA FE DR	CORONA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73681	0.2 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
73682	16.8 to 30.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
73683	32.8 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	328	SF	$120	**$39,300**
73684	108.1 to 113.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
73685	119.3 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
73686	128.6 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
73687	138.9 to 140.3 feet		5.0-6.0%	5 ft	7			
73688	140.3 to 141.5 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: S *side of* **LOMA LINDA LN** *Starting at:* **RANCHO SANTA FE DR** **$68,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131000	LOS ARCOS LN	336 KNOX ST	KNOX ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61441	5.8 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
61442	33.9 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
61443	43.3 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
61440	45.0 to 46.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **LOS ARCOS LN** *Starting at:* **336 KNOX ST** **$12,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131218	LOS ARCOS LN	983 LOS ARCOS LN	VARBELLA PK	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62468	3.3 to 8.6 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	27	SF	$120	**$3,180**
62469	11.8 to 13.4 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	8	SF	$120	**$960**
62470	18.5 to 26.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
62473	26.9 to 46.3 feet	Key Note Segment		5 ft	97			
62466	36.7 to 37.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
62471	46.8 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
62472	52.8 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
62467	65.1 to 66.1 feet	**Vertical Change**	.6"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **LOS ARCOS LN** *Starting at:* **983 LOS ARCOS LN** **$21,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131004	LOS ARCOS LN	KNOX ST	SOLANO ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61446	66.3 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61444	72.8 to 73.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
61447	74.0 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
61448	102.2 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
61449	116.3 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
61450	132.7 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
61451	155.5 to 164.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
61452	215.9 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61453	252.2 to 274.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
61454	278.4 to 282.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61455	288.7 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61456	299.3 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
61457	310.8 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
61458	319.9 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
61459	329.7 to 334.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: N *side of* **LOS ARCOS LN** *Starting at:* **KNOX ST** **$74,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131216	LOS ARCOS LN	LAS FRESAS WAY	983 LAS CASAS LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62450	0.3 to 3.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
62451	4.6 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
62462	23.9 to 43.8 feet	Key Note Segment		5 ft	100			
62452	45.3 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
62463	51.8 to 71.2 feet	Key Note Segment		5 ft	97			
62449	61.3 to 62.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
62453	73.3 to 74.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
62454	77.8 to 92.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
62455	92.6 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
62456	96.4 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
62457	102.5 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
62464	121.3 to 141.3 feet	Key Note Segment		5 ft	100			
62458	142.3 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
62465	152.3 to 172.2 feet	Key Note Segment		5 ft	99			
62459	172.2 to 193.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	107	SF	$40	**$4,260**
62460	193.5 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
62461	197.7 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**

TOTAL COST FOR: N *side of* **LOS ARCOS LN** *Starting at:* **LAS FRESAS WAY** **$62,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131213	LOS ARCOS LN	SOLANO ST	LAS FRESAS WAY	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62437	3.1 to 5.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
62438	7.8 to 9.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
62439	11.5 to 17.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
62435	12.0 to 13.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
62440	17.7 to 29.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
62436	37.8 to 38.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
62441	42.3 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
62442	48.1 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
62443	68.3 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
62444	73.5 to 85.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
62445	88.4 to 119.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	153	SF	$120	**$18,360**
62446	120.4 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
62447	125.8 to 150.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
62448	148.8 to 150.5 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **LOS ARCOS LN** *Starting at:* **SOLANO ST** **$71,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108130955	LOS ARCOS LN	VARBELLA PK	960 LOS ARCOS LN	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61429	5.0 to 13.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	46	SF	$120	**$5,544**
61430	13.9 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,402**
61431	25.7 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	45	SF	$120	**$5,346**
61432	37.4 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	46	SF	$120	**$5,544**
61433	45.8 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	78	SF	$120	**$9,306**
61434	65.9 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,650**
61435	68.4 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	23	SF	$120	**$2,706**
61436	72.5 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,914**
61437	82.8 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	176	SF	$120	**$21,120**
61438	122.0 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	105	SF	$120	**$12,606**
61428	129.6 to 130.6 feet	**Vertical Change**	.28"	6 ft	6	REF		
61439	145.1 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	232	SF	$120	**$27,786**

TOTAL COST FOR: S *side of* **LOS ARCOS LN** *Starting at:* **VARBELLA PK** **$99,924.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121016	LOS CERRITOS WAY	ARDILLA DR	OSO DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59872	0.0 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59873	7.3 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
59882	12.5 to 34.1 feet	Key Note Segment		5 ft	108			
59874	41.9 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
59883	56.2 to 76.7 feet	Key Note Segment		5 ft	103			
59875	77.1 to 82.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
59868	82.0 to 83.0 feet	Vertical Change	.31"	5 ft	5	REF		
59884	82.3 to 101.8 feet	Key Note Segment		5 ft	98			
59869	92.9 to 93.9 feet	Vertical Change	.28"	5 ft	5	REF		
59876	103.0 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
59877	126.7 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
59878	130.8 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,980**
59870	137.0 to 138.0 feet	Vertical Change	-.28"	5 ft	5	REF		
59885	144.1 to 165.1 feet	Key Note Segment		5 ft	105			
59879	165.9 to 169.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
59886	170.0 to 191.2 feet	Key Note Segment		5 ft	106			
59871	170.2 to 171.2 feet	Vertical Change	.35"	5 ft	5	REF		
59880	191.6 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
59881	195.7 to 205.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: E *side of* **LOS CERRITOS WAY** *Starting at:* **ARDILLA DR** **$45,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121005	LOS CERRITOS WAY	OSO DR	ARDILLA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59773	5.0 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
59762	6.5 to 7.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
59792	6.5 to 26.3 feet	Key Note Segment		5 ft	99			
59774	26.3 to 32.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,180**
59793	33.8 to 54.6 feet	Key Note Segment		5 ft	104			
59775	54.6 to 61.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	33	SF	$40	**$1,320**
59776	61.2 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
59777	69.9 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,580**
59778	75.0 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
59779	82.9 to 90.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
59794	91.4 to 114.0 feet	Key Note Segment		5 ft	113			
59763	108.9 to 109.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
59780	114.0 to 122.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	44	SF	$40	**$1,740**
59795	122.7 to 142.6 feet	Key Note Segment		5 ft	100			
59781	144.8 to 147.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
59782	148.0 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
59783	163.3 to 193.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	**$18,360**
59796	199.3 to 217.2 feet	Key Note Segment		5 ft	90			
59765	209.6 to 210.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59784	222.8 to 226.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
59797	227.7 to 246.0 feet	Key Note Segment		5 ft	92			
59766	235.9 to 236.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
59767	246.2 to 247.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
59785	246.3 to 249.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$620**
59768	251.8 to 252.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
59786	257.0 to 273.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
59787	275.6 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
59788	277.9 to 281.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121005	LOS CERRITOS WAY	OSO DR	ARDILLA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59769	278.8 to 279.8 feet	Vertical Change	.52"	5 ft	5	REF		
59789	281.9 to 305.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
59770	287.6 to 288.6 feet	Vertical Change	.27"	5 ft	5	REF		
59798	305.2 to 323.6 feet	Key Note Segment		5 ft	92			
59790	323.6 to 329.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
59799	332.8 to 353.9 feet	Key Note Segment		5 ft	106			
59772	339.2 to 340.2 feet	Vertical Change	.26"	5 ft	5	REF		
59791	354.7 to 361.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: W *side of* **LOS CERRITOS WAY** *Starting at:* **OSO DR** **$85,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171035	LOS OSOS CT	CAITLAN DR	CAITLAN DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88727	0.0 to 16.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
88728	19.0 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
88747	25.3 to 60.8 feet	Key Note Segment		5 ft	178			
88711	43.1 to 44.1 feet	**Vertical Change**	-.61"	5 ft	5	REF		
88729	62.0 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
88730	65.5 to 70.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
88748	71.3 to 106.4 feet	Key Note Segment		5 ft	176			
88712	81.4 to 82.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
88713	89.2 to 90.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
88731	107.6 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
88732	110.2 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
88733	114.1 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
88734	132.8 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
88749	137.8 to 168.6 feet	Key Note Segment		5 ft	154			
88714	149.5 to 150.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
88735	171.1 to 174.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
88736	175.2 to 178.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
88737	182.6 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
88750	194.1 to 224.5 feet	Key Note Segment		5 ft	152			
88715	199.6 to 200.6 feet	**Vertical Change**	.68"	5 ft	5	REF		
88716	206.8 to 207.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
88717	214.6 to 215.6 feet	**Vertical Change**	.59"	5 ft	5	REF		
88751	231.0 to 261.4 feet	Key Note Segment		5 ft	152			
88718	244.4 to 245.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
88738	261.5 to 265.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
88719	263.5 to 264.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
88739	272.8 to 281.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
88752	281.8 to 313.8 feet	Key Note Segment		5 ft	160			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112171035	LOS OSOS CT	CAITLAN DR	CAITLAN DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88720	282.2 to 283.2 feet	Vertical Change	.27"	5 ft	5	REF		
88740	315.8 to 325.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
88741	328.3 to 336.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
88753	336.3 to 367.8 feet	Key Note Segment		5 ft	158			
88742	368.2 to 369.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
88743	369.2 to 378.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
88744	378.3 to 397.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,340**
88754	400.3 to 437.4 feet	Key Note Segment		5 ft	186			
88721	419.4 to 420.4 feet	Vertical Change	.45"	5 ft	5	REF		
88745	439.5 to 442.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
88722	445.7 to 446.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
88755	449.7 to 484.4 feet	Key Note Segment		5 ft	174			
88723	459.7 to 460.7 feet	Vertical Change	.48"	5 ft	5	REF		
88724	466.6 to 467.6 feet	Vertical Change	.59"	5 ft	5	REF		
88725	475.3 to 476.3 feet	Vertical Change	.32"	5 ft	5	REF		
88746	485.5 to 506.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
88756	505.4 to 506.4 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S/E/N *side of* **LOS OSOS CT** *Starting at:* **CAITLAN DR** **$89,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109160732	LOVE CT	PAINTBRUSH DR	PAINTBRUSH DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68132	1.6 to 3.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
68133	6.2 to 7.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
68126	6.7 to 7.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
68134	10.3 to 17.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
68151	19.8 to 43.8 feet	Key Note Segment		5 ft	120			
68127	21.0 to 22.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
68135	47.9 to 53.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
68128	54.5 to 55.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
68136	58.5 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
68152	64.4 to 84.8 feet	Key Note Segment		5 ft	102			
68137	88.3 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
68129	97.3 to 98.3 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
68138	103.3 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68153	105.1 to 125.1 feet	Key Note Segment		5 ft	100			
68139	130.1 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
68140	143.5 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
68141	157.7 to 159.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68154	160.2 to 173.4 feet	Key Note Segment		5 ft	66			
68142	173.4 to 176.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
68130	174.9 to 175.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
68143	179.0 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68144	184.8 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
68155	190.3 to 215.9 feet	Key Note Segment		5 ft	128			
68145	215.9 to 217.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
68146	226.3 to 230.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
68131	231.0 to 232.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
68147	232.8 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68148	234.6 to 240.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S / N	2109160732	LOVE CT	PAINTBRUSH DR	PAINTBRUSH DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68156	243.8 to 265.6 feet	Key Note Segment		5 ft	109			
68149	266.9 to 275.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
68150	275.9 to 281.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
68157	283.7 to 285.8 feet		5.0-6.0%	5 ft	11			
68158	283.7 to 285.8 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: S / N *side of* **LOVE CT** *Starting at:* **PAINTBRUSH DR** **$43,505.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271442	LUCCA COURT	1250 LUCCA COURT	MILANO LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111585	0.5 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
111592	2.8 to 22.8 feet	Key Note Segment		5 ft	100			
111577	46.5 to 47.5 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
111586	62.8 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
111587	79.0 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111593	81.8 to 105.2 feet	Key Note Segment		5 ft	117			
111579	107.5 to 108.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
111588	108.2 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
111594	115.9 to 136.5 feet	Key Note Segment		5 ft	103			
111589	138.4 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
111590	151.3 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
111581	168.8 to 169.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111595	172.5 to 192.2 feet	Key Note Segment		5 ft	99			
111582	182.1 to 183.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
111583	194.4 to 195.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
111584	208.0 to 209.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
111591	210.9 to 214.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: W *side of* **LUCCA COURT** *Starting at:* **1250 LUCCA COURT** **$15,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271440	LUCCA COURT	MILANO LANE	1250 LUCCA COURT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111564	4.0 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
111565	9.6 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
111573	23.0 to 43.0 feet	Key Note Segment		5 ft	100			
111554	33.4 to 34.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
111566	44.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
111555	49.0 to 50.0 feet	**Vertical Change**	.98"	5 ft	5	REF		
111567	55.2 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111568	62.6 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
111574	76.3 to 97.1 feet	Key Note Segment		5 ft	104			
111556	87.6 to 88.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
111569	99.5 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
111557	99.8 to 100.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
111575	107.2 to 130.2 feet	Key Note Segment		5 ft	115			
111570	131.9 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111571	158.9 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
111558	161.8 to 162.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
111559	163.6 to 164.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
111560	172.0 to 173.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
111561	189.3 to 190.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111576	191.8 to 210.3 feet	Key Note Segment		5 ft	93			
111562	201.1 to 202.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
111572	212.3 to 216.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
111563	213.5 to 214.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **LUCCA COURT** *Starting at:* **MILANO LANE** **$38,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011358	LUCIA WAY	ASHLAN WAY	NOREEN WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116469	0.6 to 5.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	18	SF	$120	**$2,160**
116470	6.5 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
116471	8.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
116472	19.5 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
116473	26.5 to 32.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,832**
116452	31.0 to 32.0 feet	**Vertical Change**	-.29"	4 ft	4	REF		
116495	33.6 to 51.5 feet	Key Note Segment		4 ft	72			
116453	43.1 to 44.1 feet	**Vertical Change**	-.31"	4 ft	4	REF		
116454	51.6 to 52.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
116474	54.8 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
116475	63.8 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
116476	73.0 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
116455	75.1 to 76.1 feet	**Vertical Change**	.75"	4 ft	4	REF		
116477	80.8 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
116456	91.2 to 92.2 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
116496	92.5 to 109.6 feet	Key Note Segment		4 ft	68			
116457	109.9 to 110.9 feet	**Vertical Change**	.31"	4 ft	4	REF		
116478	111.4 to 117.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$3,024**
116497	117.7 to 136.8 feet	Key Note Segment		4 ft	76			
116458	118.3 to 121.7 feet	**Vertical Change**	-.27"	4 ft	14	REF		
116459	136.6 to 137.6 feet	**Vertical Change**	-.27"	4 ft	4	REF		
116479	138.4 to 152.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	56	SF	$120	**$6,768**
116460	145.9 to 146.9 feet	**Vertical Change**	-.34"	4 ft	4	REF		
116480	153.3 to 154.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
116481	154.8 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
116482	168.5 to 171.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
116483	176.6 to 181.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
116484	195.5 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011358	LUCIA WAY	ASHLAN WAY	NOREEN WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116498	199.8 to 218.7 feet	Key Note Segment		4 ft	76			
116499	226.2 to 245.1 feet	Key Note Segment		4 ft	76			
116485	248.2 to 287.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	158	SF	$120	**$18,960**
116461	274.8 to 275.8 feet	**Vertical Change**	-.29"	4 ft	4	REF		
116486	287.7 to 308.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	81	SF	$120	**$9,744**
116504	307.4 to 308.4 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
116500	309.8 to 327.4 feet	Key Note Segment		4 ft	70			
116462	333.5 to 334.5 feet	**Vertical Change**	.35"	4 ft	4	LF	$75	**$300**
116501	336.2 to 353.1 feet	Key Note Segment		4 ft	68			
116463	354.4 to 355.4 feet	**Vertical Change**	1.31"	4 ft	4	REF		
116487	354.9 to 360.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
116488	360.1 to 371.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	47	SF	$120	**$5,616**
116489	371.8 to 389.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	71	SF	$120	**$8,496**
116502	390.0 to 407.6 feet	Key Note Segment		4 ft	70			
116464	408.8 to 409.8 feet	**Vertical Change**	-.42"	4 ft	4	LF	$75	**$300**
116490	410.4 to 423.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	54	SF	$120	**$6,480**
116491	428.5 to 434.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
116492	434.8 to 440.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
116503	444.4 to 463.5 feet	Key Note Segment		4 ft	76			
116465	446.2 to 447.2 feet	**Vertical Change**	1.87"	4 ft	4	REF		
116466	451.4 to 452.4 feet	**Vertical Change**	-.35"	4 ft	4	REF		
116467	464.7 to 465.7 feet	**Vertical Change**	.29"	4 ft	4	REF		
116493	465.5 to 467.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
116494	467.5 to 469.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
116468	469.0 to 470.0 feet	**Vertical Change**	1.14"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **LUCIA WAY** *Starting at:* **ASHLAN WAY** **$100,071.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311425	LUCIA WAY	ASTI WAY	LYNN WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115759	0.3 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
115760	8.8 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
115749	11.1 to 12.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
115777	14.7 to 16.2 feet		5.0-6.0%	5 ft	8			
115761	23.2 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
115775	28.0 to 29.0 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
115750	35.1 to 36.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
115776	41.2 to 42.2 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
115751	48.9 to 49.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
115762	51.8 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
115763	53.2 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
115752	57.2 to 58.2 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
115764	66.9 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
115772	73.3 to 88.0 feet	Key Note Segment		5 ft	74			
115753	74.2 to 75.2 feet	**Vertical Change**	-.56"	5 ft	5	REF		
115765	88.3 to 91.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
115754	101.7 to 102.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
115755	114.5 to 115.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
115766	132.7 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
115767	141.7 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
115773	151.0 to 165.6 feet	Key Note Segment		5 ft	73			
115768	165.6 to 169.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$840**
115769	172.1 to 178.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
115774	178.6 to 192.0 feet	Key Note Segment		5 ft	67			
115756	186.5 to 187.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
115770	192.3 to 194.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
115757	193.3 to 194.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
115758	204.8 to 205.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311425	LUCIA WAY	ASTI WAY	LYNN WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115771	208.8 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: E *side of* **LUCIA WAY** *Starting at:* **ASTI WAY** **$35,688.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311415	LUCIA WAY	GABRIEL WAY	ASTI WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115694	0.0 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
115686	1.8 to 2.8 feet	**Vertical Change**	1.17"	5 ft	5	REF		
115687	16.7 to 17.7 feet	**Vertical Change**	3.14"	5 ft	5	REF		
115695	19.8 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	236	SF	$120	**$28,260**
115688	50.4 to 51.4 feet	**Vertical Change**	1.16"	5 ft	5	REF		
115696	69.5 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
115689	90.7 to 91.7 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
115690	92.4 to 93.4 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
115697	98.8 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
115698	107.8 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
115699	114.2 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115691	117.3 to 118.3 feet	**Vertical Change**	-1.04"	5 ft	5	SF	$75	**$375**
115700	120.1 to 121.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
115692	120.2 to 121.2 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **LUCIA WAY** *Starting at:* **GABRIEL WAY** **$54,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311351	LUCIA WAY	LYNN WAY	GABRIEL WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115464	2.8 to 17.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
115493	17.5 to 30.9 feet	Key Note Segment		5 ft	67			
115465	31.6 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
115451	31.9 to 32.9 feet	**Vertical Change**	.65"	5 ft	5	REF		
115466	36.7 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
115494	41.8 to 55.3 feet	Key Note Segment		5 ft	68			
115467	59.8 to 101.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	207	SF	$120	**$24,840**
115503	65.3 to 66.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
115452	86.5 to 87.5 feet	**Vertical Change**	.85"	5 ft	5	REF		
115468	105.3 to 106.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
115469	111.4 to 115.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
115495	120.0 to 134.0 feet	Key Note Segment		5 ft	70			
115454	121.1 to 122.1 feet	**Vertical Change**	-.64"	5 ft	5	REF		
115470	135.4 to 143.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
115471	143.7 to 148.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
115496	148.8 to 164.8 feet	Key Note Segment		5 ft	80			
115455	167.0 to 168.0 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$375**
115505	167.3 to 168.9 feet		7.0-8.0%	5 ft	8			
115472	169.8 to 174.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
115473	174.2 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
115504	179.9 to 180.9 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
115474	187.8 to 196.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
115475	196.4 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
115476	217.7 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
115456	223.1 to 224.1 feet	**Vertical Change**	.84"	5 ft	5	REF		
115497	223.7 to 237.8 feet	Key Note Segment		5 ft	71			
115457	224.7 to 225.7 feet	**Vertical Change**	-.47"	5 ft	5	REF		
115458	238.4 to 239.4 feet	**Vertical Change**	3.05"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311351	LUCIA WAY	LYNN WAY	GABRIEL WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115477	239.5 to 241.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
115478	242.1 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
115498	249.5 to 263.2 feet	Key Note Segment		5 ft	69			
115479	264.5 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
115480	272.0 to 276.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
115481	276.9 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	247	SF	$120	**$29,640**
115459	293.5 to 294.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
115499	326.3 to 340.7 feet	Key Note Segment		5 ft	72			
115460	341.8 to 342.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
115482	342.2 to 351.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
115500	352.3 to 365.4 feet	Key Note Segment		5 ft	66			
115483	368.8 to 383.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
115484	388.7 to 394.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
115485	396.6 to 402.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
115486	404.9 to 406.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
115487	412.4 to 414.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
115461	414.6 to 415.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
115462	422.5 to 423.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
115501	426.2 to 439.9 feet	Key Note Segment		5 ft	69			
115488	440.3 to 443.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
115489	449.2 to 458.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
115490	458.7 to 459.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115502	460.0 to 476.2 feet	Key Note Segment		5 ft	81			
115491	476.2 to 478.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
115492	484.9 to 488.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
115463	488.5 to 489.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
115506	493.1 to 495.5 feet		5.0-6.0%	5 ft	12			
115507	493.1 to 497.3 feet	Running Slope	5.0-6.0%	5 ft	21	SF	$120	**$2,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311351	LUCIA WAY	LYNN WAY	GABRIEL WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**W**	*side of* **LUCIA WAY**	*Starting at:* **LYNN WAY**					**$149,143.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011352	LUCIA WAY	NOREEN WAY	RENEE WAY	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116422	0.0 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	57	SF	$120	**$6,864**
116423	15.4 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
116424	23.8 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
116425	36.5 to 37.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
116426	42.9 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	148	SF	$120	**$17,808**
116420	59.7 to 60.7 feet	**Vertical Change**	-.36"	4 ft	4	REF		
116427	80.0 to 83.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,872**
116428	85.9 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
116429	90.3 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
116430	99.5 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,904**
116421	114.1 to 115.1 feet	**Vertical Change**	.4"	4 ft	4	REF		
116431	114.7 to 151.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	146	SF	$120	**$17,472**
116432	151.1 to 160.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	38	SF	$120	**$4,512**
116433	160.8 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**

TOTAL COST FOR: E *side of* **LUCIA WAY** *Starting at:* **NOREEN WAY** **$61,728.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011354	LUCIA WAY	RENEE WAY	ASHLAN WAY	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116439	0.5 to 20.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	78	SF	$120	**$9,408**
116440	20.1 to 46.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	107	SF	$120	**$12,864**
116434	42.9 to 43.9 feet	**Vertical Change**	-.48"	4 ft	4	REF		
116441	49.2 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
116442	53.1 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	73	SF	$120	**$8,784**
116443	73.6 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
116435	76.8 to 77.8 feet	**Vertical Change**	.26"	4 ft	4	REF		
116444	81.4 to 86.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,400**
116445	89.0 to 99.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	41	SF	$120	**$4,944**
116446	99.8 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
116447	105.9 to 131.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	101	SF	$120	**$12,144**
116448	131.2 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	**$8,304**
116436	140.6 to 141.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
116449	149.6 to 155.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,688**
116437	153.9 to 154.9 feet	**Vertical Change**	-.31"	4 ft	4	REF		
116450	155.8 to 159.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	14	SF	$120	**$1,632**
116451	159.8 to 168.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	34	SF	$120	**$4,080**
116438	167.5 to 168.5 feet	**Vertical Change**	1.65"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **LUCIA WAY** *Starting at:* **RENEE WAY** **$74,736.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281110	LYNMARIE WAY	1385 LYNMARIE WAY	MACADAMIA AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112367	0.6 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
112372	1.9 to 19.3 feet	Key Note Segment		5 ft	87			
112368	21.2 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	278	SF	$120	**$33,360**
112363	55.7 to 56.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112373	76.8 to 96.4 feet	Key Note Segment		5 ft	98			
112364	86.8 to 87.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
112369	97.9 to 103.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
112374	103.8 to 129.7 feet	Key Note Segment		5 ft	129			
112365	113.8 to 114.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
112370	131.5 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
112366	132.8 to 133.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
112371	136.6 to 143.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: E *side of* **LYNMARIE WAY** *Starting at:* **1385 LYNMARIE WAY** **$42,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281109	LYNMARIE WAY	KIMBERLEY LN	1407 LYNMARIE WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112355	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
112356	2.2 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
112351	12.2 to 13.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
112357	16.8 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
112361	20.4 to 39.8 feet	Key Note Segment		5 ft	97			
112358	41.2 to 44.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
112359	44.6 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
112360	49.4 to 70.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
112352	64.2 to 65.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
112353	68.3 to 69.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112362	70.5 to 87.8 feet	Key Note Segment		5 ft	87			
112354	79.1 to 80.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **LYNMARIE WAY** *Starting at:* **KIMBERLEY LN** **$25,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281041	LYNMARIE WAY	MACADAMIA AVE	KIMBERLEY LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112106	0.0 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
112097	9.2 to 10.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
112122	20.3 to 40.3 feet	Key Note Segment		5 ft	100			
112098	20.5 to 21.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112099	29.1 to 30.1 feet	**Vertical Change**	.44"	5 ft	5	REF		
112107	43.3 to 46.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
112100	45.2 to 46.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112123	47.2 to 65.1 feet	Key Note Segment		5 ft	89			
112101	63.0 to 64.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
112108	67.4 to 71.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
112109	72.4 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
112110	79.5 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
112111	106.8 to 121.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
112124	121.2 to 140.9 feet	Key Note Segment		5 ft	99			
112112	142.8 to 145.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
112113	147.7 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
112125	149.4 to 168.3 feet	Key Note Segment		5 ft	95			
112103	157.8 to 158.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
112114	169.9 to 172.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
112115	173.6 to 180.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
112116	181.4 to 183.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
112117	183.7 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
112118	188.3 to 225.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	188	SF	$120	**$22,500**
112104	192.4 to 193.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
112126	225.9 to 242.5 feet	Key Note Segment		5 ft	83			
112119	245.7 to 248.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
112120	253.3 to 256.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
112127	257.3 to 276.5 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281041	LYNMARIE WAY	MACADAMIA AVE	KIMBERLEY LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112105	278.1 to 279.1 feet	Vertical Change	.33"	5 ft	5	REF		
112121	278.5 to 290.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: W *side of* **LYNMARIE WAY** *Starting at:* **MACADAMIA AVE** **$91,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011319	LYNN WAY	LUCIA WAY	NOREEN WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116161	0.5 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
116184	12.3 to 13.3 feet		5.0-6.0%	5 ft	5			
116162	16.6 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
116181	18.8 to 19.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
116156	22.0 to 23.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
116157	32.7 to 33.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
116163	34.3 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,440**
116158	60.8 to 61.8 feet	**Vertical Change**	-.68"	5 ft	5	REF		
116159	80.0 to 81.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
116164	83.3 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
116160	86.2 to 87.2 feet	**Vertical Change**	1.71"	5 ft	5	REF		
116165	88.4 to 115.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	134	SF	$120	**$16,080**
116178	118.5 to 132.6 feet	Key Note Segment		5 ft	71			
116166	137.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
116179	152.1 to 165.9 feet	Key Note Segment		5 ft	69			
116167	166.5 to 179.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	66	SF	$40	**$2,640**
116182	183.3 to 184.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
116185	190.3 to 191.4 feet		6.0-7.0%	5 ft	6			
116168	194.3 to 195.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
116183	196.8 to 197.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
116169	205.0 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
116170	220.2 to 222.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
116171	225.5 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
116180	230.7 to 244.7 feet	Key Note Segment		5 ft	70			
116172	245.3 to 253.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,640**
116173	265.8 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
116174	277.5 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
116186	281.3 to 283.6 feet		5.0-6.0%	5 ft	12			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011319	LYNN WAY	LUCIA WAY	NOREEN WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116187	281.3 to 283.6 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
116175	301.3 to 307.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
116188	304.8 to 306.5 feet		5.0-6.0%	5 ft	9			
116176	325.2 to 330.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
116177	331.0 to 334.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **LYNN WAY** *Starting at:* **LUCIA WAY** **$95,807.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011435	LYNN WAY	NOREEN WAY	SONORA ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116843	9.6 to 38.3 feet	Key Note Segment		5 ft	143			
116770	29.9 to 33.1 feet	Vertical Change	.31"	5 ft	16	REF		
116771	38.9 to 39.9 feet	Vertical Change	.54"	5 ft	5	SF	$75	$375
116772	42.1 to 43.1 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
116773	46.0 to 47.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
116774	49.4 to 50.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
116811	52.7 to 54.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
116775	53.7 to 54.7 feet	Vertical Change	-.31"	5 ft	5	REF		
116776	57.0 to 58.0 feet	Vertical Change	2.95"	5 ft	5	SF	$75	$375
116812	64.2 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
116813	74.3 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
116777	79.7 to 80.7 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
116855	85.3 to 86.3 feet		7.0-8.0%	5 ft	5			
116814	85.9 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
116844	92.3 to 106.3 feet	Key Note Segment		5 ft	70			
116815	106.8 to 108.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
116778	115.5 to 116.5 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
116779	118.7 to 119.7 feet	Vertical Change	.26"	5 ft	5	REF		
116816	118.8 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
116780	123.1 to 124.1 feet	Vertical Change	1.48"	5 ft	5	SF	$75	$375
116817	124.7 to 127.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	$1,920
116818	128.8 to 131.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	$1,440
116856	130.7 to 132.8 feet		6.0-7.0%	5 ft	11			
116857	130.7 to 132.8 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	$1,260
116781	131.6 to 132.6 feet	Vertical Change	-1.68"	5 ft	5	SF	$75	$375
116782	133.7 to 137.2 feet	Vertical Change	.26"	5 ft	18	LF	$75	$1,313
116845	143.8 to 158.1 feet	Key Note Segment		5 ft	71			
116819	159.5 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011435	LYNN WAY	NOREEN WAY	SONORA ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116846	169.3 to 183.7 feet	Key Note Segment		5 ft	72			
116820	184.1 to 209.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	127	SF	$40	$5,080
116783	184.6 to 185.6 feet	Vertical Change	.27"	5 ft	5	REF		
116784	197.5 to 198.5 feet	Vertical Change	.28"	5 ft	5	REF		
116821	212.2 to 213.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
116822	213.8 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
116785	223.4 to 224.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
116786	232.3 to 233.3 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
116858	234.3 to 235.3 feet		5.0-6.0%	5 ft	5			
116787	236.4 to 237.4 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
116847	244.3 to 259.6 feet	Key Note Segment		5 ft	77			
116823	259.7 to 261.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$380
116788	260.3 to 261.3 feet	Vertical Change	-.63"	5 ft	5	REF		
116848	270.8 to 285.1 feet	Key Note Segment		5 ft	72			
116789	271.3 to 272.3 feet	Vertical Change	.3"	5 ft	5	REF		
116824	285.1 to 286.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	9	SF	$40	$360
116825	288.1 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
116790	296.0 to 297.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
116791	298.7 to 299.7 feet	Vertical Change	-.76"	5 ft	5	SF	$75	$375
116826	301.5 to 311.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
116792	305.5 to 306.5 feet	Vertical Change	.35"	5 ft	5	REF		
116793	307.4 to 308.4 feet	Vertical Change	-.27"	5 ft	5	REF		
116794	311.9 to 312.9 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
116795	314.2 to 317.6 feet	Vertical Change	.28"	5 ft	17	LF	$75	$1,275
116827	320.8 to 322.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
116796	322.3 to 323.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
116797	324.6 to 325.6 feet	Vertical Change	1.18"	5 ft	5	SF	$75	$375
116828	326.8 to 329.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011435	LYNN WAY	NOREEN WAY	SONORA ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116798	331.1 to 332.1 feet	Vertical Change	-1.01"	5 ft	5	SF	$75	$375
116829	341.0 to 345.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
116849	345.9 to 360.9 feet	Key Note Segment		5 ft	75			
116830	366.9 to 371.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
116850	371.3 to 385.5 feet	Key Note Segment		5 ft	71			
116831	388.1 to 396.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
116799	394.6 to 395.6 feet	Vertical Change	.26"	5 ft	5	REF		
116800	399.1 to 402.8 feet	Vertical Change	.41"	5 ft	19	LF	$75	$1,388
116801	406.5 to 407.5 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
116832	420.6 to 423.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
116851	446.3 to 460.8 feet	Key Note Segment		5 ft	73			
116833	461.2 to 471.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	51	SF	$40	$2,040
116802	462.1 to 463.1 feet	Vertical Change	.61"	5 ft	5	REF		
116852	472.7 to 487.4 feet	Key Note Segment		5 ft	74			
116834	488.9 to 490.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
116835	490.3 to 491.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
116803	514.0 to 515.0 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
116836	515.9 to 525.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
116804	526.8 to 527.8 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
116837	540.8 to 544.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
116805	542.2 to 543.2 feet	Vertical Change	-.33"	5 ft	5	REF		
116853	544.2 to 558.3 feet	Key Note Segment		5 ft	70			
116838	558.3 to 575.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	88	SF	$40	$3,500
116854	575.8 to 591.1 feet	Key Note Segment		5 ft	77			
116839	591.1 to 597.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	34	SF	$40	$1,360
116806	591.6 to 592.6 feet	Vertical Change	-.3"	5 ft	5	REF		
116840	604.6 to 610.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
116841	612.2 to 613.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$1,020

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011435	LYNN WAY	NOREEN WAY	SONORA ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116842	613.9 to 640.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
116808	614.8 to 615.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
116809	626.1 to 627.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
116810	640.6 to 641.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **LYNN WAY** *Starting at:* **NOREEN WAY** **$103,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311346	LYNN WAY	SONORA ST	LUCIA WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115445	0.0 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,560**
115443	13.4 to 14.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
115446	40.4 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
115444	51.7 to 52.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
115447	54.9 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
115448	69.0 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
115449	91.0 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
115450	141.5 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: S *side of* **LYNN WAY** *Starting at:* **SONORA ST** **$64,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108100920	LYONS ST	821 E YOSEMITE AVE	E YOSEMITE AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55198	0.0 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	32	SF	$120	**$3,780**
55199	6.7 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,260**
55200	8.3 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	45	SF	$120	**$5,400**
55207	14.3 to 35.7 feet	Key Note Segment		8 ft	161			
55196	36.1 to 37.1 feet	**Vertical Change**	-.34"	8 ft	8	REF		
55201	38.3 to 42.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	28	SF	$120	**$3,330**
55202	44.1 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,080**
55203	48.3 to 117.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	515	SF	$120	**$61,830**
55204	123.3 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	79	SF	$120	**$9,450**
55205	136.1 to 137.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	13	SF	$120	**$1,530**
55206	139.0 to 140.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,350**
55209	139.8 to 141.5 feet		5.0-6.0%	8 ft	13			
55208	143.1 to 165.0 feet	Key Note Segment		8 ft	164			

TOTAL COST FOR: SW *side of* **LYONS ST** *Starting at:* **821 E YOSEMITE AVE** **$89,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281038	MACADAMIA AVE	1340 LYNMARIE WAY	LYNMARIE WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112093	0.0 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	165	SF	$120	**$19,740**
112092	12.3 to 13.3 feet	**Vertical Change**	.51"	5 ft	5	REF		
112094	36.8 to 38.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
112095	40.6 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
112096	46.0 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **1340 LYNMARIE WAY** **$28,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281156	MACADAMIA AVE	655 MACADAMIA AVE	551 MACADAMIA AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112538	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
112539	7.6 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
112530	18.0 to 19.0 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
112540	19.1 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
112541	33.0 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
112552	43.0 to 63.4 feet	Key Note Segment		5 ft	102			
112542	64.1 to 67.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
112532	68.4 to 69.4 feet	**Vertical Change**	.96"	5 ft	5	SF	$75	**$375**
112553	69.3 to 88.6 feet	Key Note Segment		5 ft	97			
112533	86.2 to 87.2 feet	**Vertical Change**	1.2"	5 ft	5	REF		
112543	90.7 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
112544	103.3 to 109.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
112545	110.7 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
112546	117.1 to 137.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
112557	132.6 to 133.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
112554	138.7 to 157.8 feet	Key Note Segment		5 ft	96			
112534	158.3 to 159.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
112547	161.3 to 164.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
112555	164.6 to 183.1 feet	Key Note Segment		5 ft	93			
112535	166.0 to 167.0 feet	**Vertical Change**	1.2"	5 ft	5	REF		
112536	194.7 to 195.7 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
112548	208.2 to 211.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
112549	212.4 to 231.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,220**
112550	231.1 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
112556	234.5 to 253.0 feet	Key Note Segment		5 ft	93			
112537	243.7 to 247.7 feet	**Vertical Change**	.76"	5 ft	20	REF		
112551	254.9 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: N *side of* **MACADAMIA AVE** *Starting at:* **655 MACADAMIA AVE** **$58,944.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281154	MACADAMIA AVE	701 MACADAMIA AVE	655 MACADAMIA AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112519	0.4 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
112515	0.6 to 1.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
112526	1.8 to 21.4 feet	Key Note Segment		5 ft	98			
112520	24.1 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
112516	28.4 to 29.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112521	41.3 to 53.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
112527	54.5 to 74.7 feet	Key Note Segment		5 ft	101			
112522	75.8 to 79.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
112523	79.8 to 84.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
112517	82.6 to 83.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112524	84.6 to 123.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	192	SF	$120	**$23,040**
112528	127.8 to 148.0 feet	Key Note Segment		5 ft	101			
112525	148.7 to 153.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
112529	154.5 to 173.9 feet	Key Note Segment		5 ft	97			
112518	155.1 to 156.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MACADAMIA AVE** *Starting at:* **701 MACADAMIA AVE** **$47,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281116	MACADAMIA AVE	ALEXIS WAY	TEVIN WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112405	0.0 to 15.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
112414	1.0 to 2.0 feet	Protruding Object	48"	5 ft	5	JOB	$99	**$99**
112415	11.5 to 12.5 feet	Protruding Object	48"	5 ft	5	JOB	$99	**$99**
112399	17.2 to 18.2 feet	Vertical Change	3.26"	5 ft	5	REF		
112406	18.0 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
112400	25.5 to 26.5 feet	Vertical Change	-.3"	5 ft	5	REF		
112407	30.4 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112408	34.0 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$24,060**
112401	53.8 to 54.8 feet	Vertical Change	.4"	5 ft	5	REF		
112409	75.8 to 77.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
112410	80.5 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	289	SF	$120	**$34,680**
112402	114.8 to 115.8 feet	Vertical Change	.34"	5 ft	5	REF		
112411	142.8 to 158.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
112416	152.9 to 153.9 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
112412	160.9 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
112404	164.6 to 165.6 feet	Vertical Change	-.38"	5 ft	5	REF		
112413	168.4 to 169.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **ALEXIS WAY** **$89,277.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281152	MACADAMIA AVE	BARNETT WAY	701 MACADAMIA AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112461	0.8 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
112462	18.3 to 20.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
112463	22.5 to 23.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
112464	24.7 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
112465	30.0 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
112448	30.2 to 31.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
112504	31.3 to 51.6 feet	Key Note Segment		5 ft	102			
112466	52.8 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
112449	73.3 to 74.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
112467	76.6 to 79.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
112468	82.8 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
112505	91.1 to 108.7 feet	Key Note Segment		5 ft	88			
112469	110.5 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
112506	122.2 to 140.2 feet	Key Note Segment		5 ft	90			
112450	136.1 to 137.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
112451	138.5 to 139.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
112452	140.2 to 141.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
112470	144.9 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
112471	149.0 to 207.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	292	SF	$120	**$34,980**
112453	208.8 to 209.8 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
112507	208.8 to 228.8 feet	Key Note Segment		5 ft	100			
112472	231.0 to 234.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
112473	234.8 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
112474	238.7 to 239.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
112508	240.3 to 260.5 feet	Key Note Segment		5 ft	101			
112475	261.7 to 265.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
112476	268.5 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
112477	283.0 to 330.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	239	SF	$120	**$28,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281152	MACADAMIA AVE	BARNETT WAY	701 MACADAMIA AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112454	303.7 to 304.7 feet	Vertical Change	.3"	5 ft	5	REF		
112455	320.9 to 321.9 feet	Vertical Change	-.4"	5 ft	5	REF		
112509	330.8 to 347.8 feet	Key Note Segment		5 ft	85			
112478	349.4 to 352.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
112479	352.1 to 359.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
112510	360.2 to 379.2 feet	Key Note Segment		5 ft	95			
112456	379.8 to 380.8 feet	Vertical Change	-.3"	5 ft	5	REF		
112480	380.6 to 393.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
112481	395.1 to 396.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
112482	399.4 to 406.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
112483	406.8 to 430.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
112457	409.3 to 410.3 feet	Vertical Change	3.19"	5 ft	5	REF		
112484	430.7 to 447.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
112511	447.9 to 467.4 feet	Key Note Segment		5 ft	98			
112485	469.1 to 477.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
112486	477.0 to 479.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
112512	480.2 to 498.6 feet	Key Note Segment		5 ft	92			
112487	500.2 to 520.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,060**
112488	520.3 to 533.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
112489	534.3 to 540.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
112513	541.2 to 561.1 feet	Key Note Segment		5 ft	99			
112458	546.3 to 547.3 feet	Vertical Change	-.31"	5 ft	5	REF		
112490	563.8 to 572.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
112491	572.8 to 591.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
112492	591.6 to 601.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
112493	603.9 to 611.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
112494	611.0 to 614.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
112495	614.9 to 634.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281152	MACADAMIA AVE	BARNETT WAY	701 MACADAMIA AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112496	635.1 to 646.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
112497	646.7 to 671.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,580**
112459	661.7 to 662.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
112498	673.3 to 703.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	151	SF	$120	**$18,120**
112514	703.5 to 725.0 feet	Key Note Segment		5 ft	108			
112499	725.6 to 737.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
112460	735.3 to 736.3 feet	**Vertical Change**	2.02"	5 ft	5	REF		
112500	738.0 to 739.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
112501	742.5 to 750.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
112502	755.0 to 758.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
112503	760.5 to 761.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **MACADAMIA AVE** *Starting at:* **BARNETT WAY** **$289,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281035	MACADAMIA AVE	FILBERT ST	HICKORY AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112018	0.0 to 10.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
112019	13.0 to 14.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
112020	16.2 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
112021	18.2 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
112022	20.8 to 22.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
112063	22.8 to 41.8 feet	Key Note Segment		5 ft	95			
111994	29.5 to 30.5 feet	**Vertical Change**	2.31"	5 ft	5	REF		
111995	32.6 to 33.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112023	43.6 to 48.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
112064	48.3 to 67.3 feet	Key Note Segment		5 ft	95			
111996	49.1 to 50.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
111997	58.9 to 59.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
111998	68.0 to 69.0 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
112024	69.1 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
112025	78.4 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,580**
112026	103.5 to 124.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
112027	124.8 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
112065	128.9 to 148.3 feet	Key Note Segment		5 ft	97			
111999	129.2 to 130.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
112000	148.6 to 149.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
112028	149.4 to 154.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
112001	152.2 to 153.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
112066	155.8 to 173.9 feet	Key Note Segment		5 ft	90			
112002	165.2 to 166.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
112029	191.8 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
112030	212.3 to 218.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
112031	220.3 to 221.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
112032	225.8 to 228.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281035	MACADAMIA AVE	FILBERT ST	HICKORY AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112033	228.2 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
112067	235.9 to 253.8 feet	Key Note Segment		5 ft	90			
112034	257.5 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
112068	262.0 to 281.1 feet	Key Note Segment		5 ft	96			
112076	264.4 to 265.4 feet	**Protruding Object**	36"	5 ft	5	JOB	$99	**$99**
112035	290.1 to 291.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112036	292.5 to 293.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
112037	293.5 to 319.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	132	SF	$120	**$15,780**
112038	319.8 to 327.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
112039	329.3 to 332.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
112040	332.9 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
112069	341.3 to 361.1 feet	Key Note Segment		5 ft	99			
112004	351.8 to 352.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
112005	361.6 to 362.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
112041	362.4 to 364.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
112042	364.7 to 367.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
112070	368.2 to 387.6 feet	Key Note Segment		5 ft	97			
112006	368.5 to 369.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
112043	387.6 to 390.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**
112044	391.6 to 395.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
112007	394.9 to 395.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112045	395.8 to 399.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
112008	399.5 to 400.5 feet	**Vertical Change**	3.34"	5 ft	5	REF		
112046	405.3 to 413.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
112009	407.9 to 408.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
112047	415.9 to 417.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
112010	416.7 to 417.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
112071	420.9 to 439.7 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281035	MACADAMIA AVE	FILBERT ST	HICKORY AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112011	421.4 to 422.4 feet	Vertical Change	-.3"	5 ft	5	REF		
112048	439.7 to 442.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	15	SF	$40	**$580**
112049	445.3 to 448.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
112050	449.2 to 457.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
112051	459.9 to 476.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
112012	476.5 to 477.5 feet	Vertical Change	.29"	5 ft	5	REF		
112052	476.8 to 484.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
112053	489.8 to 498.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
112054	498.2 to 501.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
112072	501.4 to 520.5 feet	Key Note Segment		5 ft	96			
112055	521.7 to 522.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
112073	526.9 to 547.2 feet	Key Note Segment		5 ft	102			
112014	547.2 to 548.2 feet	Vertical Change	.33"	5 ft	5	REF		
112056	548.5 to 570.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
112015	557.0 to 558.0 feet	Vertical Change	.44"	5 ft	5	REF		
112057	570.7 to 587.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
112058	594.9 to 607.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
112074	607.7 to 627.1 feet	Key Note Segment		5 ft	97			
112016	609.1 to 610.1 feet	Vertical Change	.41"	5 ft	5	REF		
112077	627.1 to 628.1 feet		5.0-6.0%	5 ft	5			
112059	629.1 to 633.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
112075	633.8 to 652.8 feet	Key Note Segment		5 ft	95			
112078	652.8 to 654.6 feet		5.0-6.0%	5 ft	9			
112017	653.6 to 654.6 feet	Vertical Change	.43"	5 ft	5	LF	$75	**$375**
112060	657.0 to 660.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
112061	663.0 to 673.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
112062	673.9 to 675.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **FILBERT ST** **$183,629.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281036	MACADAMIA AVE	HICKORY AVE	1340 MACADAMIA AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112081	0.0 to 7.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
112082	8.5 to 11.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
112083	11.8 to 16.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
112084	16.9 to 46.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$18,000**
112085	47.8 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
112086	73.7 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
112079	78.2 to 79.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
112087	79.1 to 80.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
112088	83.3 to 87.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,760**
112080	86.9 to 87.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
112089	87.9 to 97.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
112090	98.3 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
112091	107.1 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **HICKORY AVE** **$60,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281113	MACADAMIA AVE	LYNMARIE WAY	ALEXIS WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112384	0.0 to 16.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
112375	0.5 to 1.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
112376	10.7 to 11.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
112385	16.7 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
112386	39.7 to 44.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
112397	40.8 to 41.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
112387	44.9 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
112398	72.5 to 73.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
112388	74.8 to 84.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
112389	85.0 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
112378	91.4 to 92.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
112390	92.3 to 97.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
112391	100.2 to 112.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,620**
112392	113.4 to 122.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
112379	123.0 to 126.0 feet	**Vertical Change**	.33"	5 ft	15	REF		
112393	123.1 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
112380	127.0 to 128.0 feet	**Vertical Change**	1.17"	5 ft	5	SF	$75	**$375**
112394	128.3 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
112395	130.3 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
112381	136.5 to 137.5 feet	**Vertical Change**	1.65"	5 ft	5	REF		
112396	146.5 to 165.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
112382	149.4 to 150.4 feet	**Vertical Change**	.52"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **LYNMARIE WAY** **$88,713.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281118	MACADAMIA AVE	TEVIN WAY	BARNETT WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112417	2.0 to 27.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
112418	27.1 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
112419	31.6 to 67.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	177	SF	$120	**$21,300**

TOTAL COST FOR: S *side of* **MACADAMIA AVE** *Starting at:* **TEVIN WAY** **$38,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108100929	MACE ST	E YOSEMITE AVE	5TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55219	0.0 to 56.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	309	SF	$120	**$37,026**
55220	61.0 to 89.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	155	SF	$120	**$18,612**
55216	67.7 to 68.7 feet	**Vertical Change**	.41"	6 ft	6	REF		
55221	92.8 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	36	SF	$120	**$4,290**
55222	102.2 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	14	SF	$120	**$1,716**
55223	106.0 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	86	SF	$120	**$10,362**
55224	122.8 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	141	SF	$120	**$16,962**
55225	151.3 to 174.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	128	SF	$120	**$15,378**
55235	178.5 to 204.9 feet	Key Note Segment		6 ft	145			
55226	205.9 to 210.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	25	SF	$120	**$3,036**
55227	213.4 to 218.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	30	SF	$120	**$3,630**
55228	221.1 to 230.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	51	SF	$120	**$6,138**
55229	230.9 to 232.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	10	SF	$120	**$1,254**
55230	232.8 to 239.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	34	SF	$120	**$4,092**
55218	240.8 to 241.8 feet	**Vertical Change**	.4"	6 ft	6	LF	$75	**$413**
55231	242.3 to 243.6 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	7	SF	$120	**$858**
55232	245.8 to 247.3 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	8	SF	$120	**$990**
55233	247.3 to 253.6 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	35	SF	$120	**$4,158**
55234	253.6 to 263.3 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	53	SF	$120	**$6,402**

TOTAL COST FOR: NE *side of* **MACE ST** *Starting at:* **E YOSEMITE AVE** **$135,316.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191525	MADARIN ST	1428 MADARIN ST	PEAR ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74902	5.3 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,884**
74918	19.9 to 41.7 feet	Key Note Segment		5 ft	98			
74898	41.3 to 42.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
74903	43.0 to 44.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
74919	45.3 to 66.8 feet	Key Note Segment		5 ft	97			
74899	56.4 to 57.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
74904	71.6 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
74905	76.4 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,646**
74906	81.3 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
74901	84.8 to 85.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$338**
74907	88.9 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,158**
74920	96.6 to 119.2 feet	Key Note Segment		5 ft	102			
74908	120.1 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74909	124.2 to 127.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,728**
74910	127.4 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,808**
74911	136.5 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,294**
74912	143.1 to 160.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,342**
74913	165.1 to 177.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
74914	180.2 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
74915	183.2 to 184.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$648**
74916	186.7 to 187.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74917	190.0 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**

TOTAL COST FOR: N *side of* **MADARIN ST** *Starting at:* **1428 MADARIN ST** **$44,833.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191523	MADARIN ST	1438 MADARIN ST	1438 MADARIN ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74896	7.8 to 18.1 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	46	SF	$120	**$5,562**
74897	21.8 to 25.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,782**

TOTAL COST FOR: N *side of* **MADARIN ST** *Starting at:* **1438 MADARIN ST** **$7,344.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191511	MADARIN ST	BLUEBERRY LN	KIWI ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74819	0.0 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
74820	4.6 to 31.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,310**
74817	23.6 to 24.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
74821	32.7 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,590**
74822	43.5 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
74823	56.5 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,592**
74824	61.3 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
74825	65.4 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,466**
74818	87.3 to 88.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
74826	103.8 to 110.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,456**
74827	112.4 to 114.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
74828	114.8 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
74829	118.5 to 126.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,266**
74830	126.4 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
74831	132.1 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,564**

TOTAL COST FOR: S *side of* **MADARIN ST** *Starting at:* **BLUEBERRY LN** **$67,284.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191522	MADARIN ST	KIWI ST	1448 MADARIN ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74882	0.0 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74891	2.4 to 20.8 feet	Key Note Segment		5 ft	83			
74877	2.8 to 3.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
74892	26.0 to 48.8 feet	Key Note Segment		5 ft	103			
74878	37.1 to 38.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
74883	50.0 to 55.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,916**
74884	58.3 to 68.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,562**
74885	69.0 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
74893	76.2 to 98.2 feet	Key Note Segment		5 ft	99			
74879	87.9 to 88.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
74886	99.1 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
74894	102.3 to 124.3 feet	Key Note Segment		5 ft	99			
74880	113.7 to 114.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
74887	125.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
74888	132.5 to 136.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,944**
74889	136.4 to 146.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,670**
74890	147.8 to 153.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,970**
74895	154.4 to 176.7 feet	Key Note Segment		5 ft	100			

TOTAL COST FOR: N *side of* **MADARIN ST** *Starting at:* **KIWI ST** **$26,514.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191504	MADARIN ST	PEAR ST	BLUEBERRY LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74760	0.0 to 2.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	10	SF	$120	**$1,242**
74761	4.8 to 9.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,484**
74762	9.4 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,694**
74763	25.9 to 34.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,536**
74764	35.3 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,292**
74765	47.1 to 48.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$648**
74766	52.1 to 73.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,610**
74767	75.8 to 91.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,370**
74768	94.1 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,938**
74769	110.9 to 112.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
74770	117.0 to 138.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,394**
74759	139.6 to 140.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: S *side of* **MADARIN ST** *Starting at:* **PEAR ST** **$63,193.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081440	MADISON DR	1959 MADISON DR	EISENHOWER LN	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127347	0.6 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
127359	9.0 to 22.9 feet	Key Note Segment		5 ft	70			
127348	22.9 to 37.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	72	SF	$40	**$2,880**
127349	37.5 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
127341	49.5 to 50.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
127350	52.5 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
127351	71.5 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
127352	79.4 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
127360	86.1 to 99.3 feet	Key Note Segment		5 ft	66			
127342	97.6 to 98.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
127353	100.8 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
127354	105.8 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
127361	111.3 to 125.5 feet	Key Note Segment		5 ft	71			
127343	112.2 to 113.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
127355	125.5 to 126.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
127356	129.2 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
127344	129.8 to 130.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
127345	135.3 to 136.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
127357	136.0 to 153.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
127346	147.9 to 148.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
127358	153.7 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **MADISON DR** *Starting at:* **1959 MADISON DR** **$43,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081153	MADISON DR	ADANAC WAY	TYLER LN	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126149	1.5 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
126148	6.6 to 7.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
126150	12.9 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
126151	16.8 to 27.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
126153	27.0 to 42.8 feet	Key Note Segment		5 ft	79			
126152	42.9 to 44.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**

TOTAL COST FOR: W *side of* **MADISON DR** *Starting at:* **ADANAC WAY** **$13,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081144	MADISON DR	EISENHOWER LN	JOSEPHINE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126051	0.7 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
126052	5.1 to 9.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
126039	8.5 to 9.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
126053	9.9 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
126054	21.4 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
126055	28.2 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
126040	29.7 to 30.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
126064	39.8 to 52.6 feet	Key Note Segment		5 ft	64			
126041	52.5 to 53.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126056	52.9 to 60.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,420**
126057	60.0 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
126065	67.3 to 81.7 feet	Key Note Segment		5 ft	72			
126058	81.7 to 85.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
126043	84.8 to 85.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
126059	87.9 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
126060	120.6 to 145.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,880**
126044	134.6 to 135.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
126045	143.2 to 144.2 feet	**Vertical Change**	-.87"	5 ft	5	REF		
126066	145.4 to 158.8 feet	Key Note Segment		5 ft	67			
126046	149.7 to 150.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
126047	155.9 to 156.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
126061	159.3 to 163.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
126048	162.6 to 163.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
126062	163.6 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
126067	172.0 to 186.3 feet	Key Note Segment		5 ft	72			
126063	187.2 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
126049	204.1 to 205.1 feet	**Vertical Change**	3.13"	5 ft	5	SF	$75	**$375**
126050	211.1 to 212.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081144	MADISON DR	EISENHOWER LN	JOSEPHINE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**W**	*side of* **MADISON DR**	*Starting at:* **EISENHOWER LN**					**$68,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081312	MADISON DR	HOOVER AVE	PIERCE LN	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126846	0.5 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
126847	2.8 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
126848	30.3 to 75.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	227	SF	$120	**$27,240**
126841	31.9 to 32.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
126849	75.7 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
126842	83.3 to 84.3 feet	**Vertical Change**	.61"	5 ft	5	REF		
126850	85.8 to 94.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
126851	94.7 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,860**
126852	137.3 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
126844	146.3 to 147.3 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MADISON DR** *Starting at:* **HOOVER AVE** **$85,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081148	MADISON DR	JOSEPHINE CT	LACRETA AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126074	0.0 to 11.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
126075	15.2 to 29.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
126095	30.2 to 44.8 feet	Key Note Segment		5 ft	73			
126076	44.8 to 46.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
126077	47.6 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
126078	52.8 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
126079	54.7 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126096	56.3 to 70.8 feet	Key Note Segment		5 ft	73			
126068	67.4 to 68.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
126080	70.8 to 88.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	88	SF	$40	**$3,500**
126069	80.6 to 81.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
126070	89.3 to 90.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
126081	106.3 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
126082	118.5 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
126071	132.5 to 133.5 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
126097	134.0 to 148.3 feet	Key Note Segment		5 ft	72			
126083	148.3 to 150.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
126072	151.5 to 152.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
126098	159.8 to 173.7 feet	Key Note Segment		5 ft	69			
126084	193.9 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
126085	200.7 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
126086	207.3 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
126099	236.9 to 251.6 feet	Key Note Segment		5 ft	74			
126087	253.9 to 262.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,100**
126100	263.4 to 277.3 feet	Key Note Segment		5 ft	70			
126088	280.2 to 282.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
126089	285.3 to 300.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,060**
126103	299.3 to 300.3 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081148	MADISON DR	JOSEPHINE CT	LACRETA AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126101	340.8 to 355.5 feet	Key Note Segment		5 ft	74			
126090	360.8 to 367.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
126073	365.7 to 366.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
126102	367.3 to 380.7 feet	Key Note Segment		5 ft	67			
126091	380.7 to 385.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$860**
126092	385.0 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
126093	399.8 to 404.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
126094	404.4 to 410.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: W *side of* **MADISON DR** *Starting at:* **JOSEPHINE CT** **$85,224.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081152	MADISON DR	LACRETA AVE	ADANAC WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126115	6.3 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
126140	27.5 to 43.1 feet	Key Note Segment		5 ft	78			
126116	44.3 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
126105	52.3 to 53.3 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
126141	54.0 to 68.3 feet	Key Note Segment		5 ft	72			
126106	71.1 to 72.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
126117	75.4 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
126118	87.9 to 115.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,320**
126119	117.8 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
126120	124.6 to 130.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
126121	132.3 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
126142	134.0 to 146.9 feet	Key Note Segment		5 ft	65			
126122	146.9 to 154.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	37	SF	$40	**$1,480**
126143	158.8 to 174.4 feet	Key Note Segment		5 ft	78			
126123	175.4 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
126124	212.2 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
126125	219.0 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
126126	224.3 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
126144	238.3 to 251.6 feet	Key Note Segment		5 ft	67			
126127	251.6 to 261.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
126107	255.8 to 256.8 feet	**Vertical Change**	-.4"	5 ft	5	REF		
126145	263.8 to 279.2 feet	Key Note Segment		5 ft	77			
126128	280.9 to 282.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
126108	281.4 to 282.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126129	288.2 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126130	291.9 to 295.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
126131	299.3 to 307.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
126110	307.7 to 308.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081152	MADISON DR	LACRETA AVE	ADANAC WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126132	311.8 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
126111	316.4 to 317.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
126112	325.0 to 326.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
126133	337.1 to 341.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
126146	343.7 to 357.1 feet	Key Note Segment		5 ft	67			
126134	357.1 to 358.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
126113	358.5 to 359.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
126135	365.3 to 366.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126147	367.0 to 382.9 feet	Key Note Segment		5 ft	80			
126114	367.8 to 368.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
126136	382.9 to 384.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$340**
126137	390.9 to 394.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
126138	395.0 to 402.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
126139	407.8 to 414.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: W *side of* **MADISON DR** *Starting at:* **LACRETA AVE** **$108,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081437	MADISON DR	PIERCE LN	1941 MADISON DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127319	0.0 to 13.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
127320	13.4 to 19.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
127321	19.8 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
127336	23.3 to 37.8 feet	Key Note Segment		5 ft	72			
127310	35.4 to 36.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
127322	37.8 to 50.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	63	SF	$40	**$2,500**
127323	50.6 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
127311	54.3 to 55.3 feet	**Vertical Change**	.65"	5 ft	5	REF		
127324	58.6 to 73.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
127312	74.3 to 75.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
127337	74.7 to 89.9 feet	Key Note Segment		5 ft	76			
127325	89.9 to 93.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$640**
127326	95.3 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
127338	101.8 to 116.3 feet	Key Note Segment		5 ft	73			
127327	119.2 to 122.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
127313	119.7 to 120.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
127328	126.3 to 179.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	265	SF	$120	**$31,740**
127314	129.2 to 130.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
127315	135.0 to 136.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
127316	143.5 to 144.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
127339	179.3 to 193.0 feet	Key Note Segment		5 ft	69			
127329	193.0 to 197.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
127330	200.5 to 204.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
127340	204.5 to 219.3 feet	Key Note Segment		5 ft	74			
127331	219.3 to 222.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
127332	223.4 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
127333	239.1 to 245.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
127334	245.3 to 273.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081437	MADISON DR	PIERCE LN	1941 MADISON DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127317	256.1 to 257.1 feet	Vertical Change	.27"	5 ft	5	REF		
127318	257.8 to 258.8 feet	Vertical Change	-.4"	5 ft	5	REF		
127335	273.0 to 281.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: E *side of* **MADISON DR** *Starting at:* **PIERCE LN** **$103,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081310	MADISON DR	TYLER LN	HOOVER AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126796	0.0 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
126774	0.5 to 1.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
126797	11.7 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126798	17.4 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
126775	27.3 to 28.3 feet	**Vertical Change**	.42"	5 ft	5	REF		
126830	28.0 to 41.7 feet	Key Note Segment		5 ft	69			
126799	41.7 to 43.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	11	SF	$40	**$420**
126800	44.4 to 63.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
126776	45.3 to 46.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
126801	63.6 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
126777	70.3 to 71.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126802	75.5 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
126778	78.9 to 79.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
126831	80.4 to 94.2 feet	Key Note Segment		5 ft	69			
126803	94.9 to 96.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
126780	97.8 to 98.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
126804	102.4 to 104.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
126805	104.3 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
126781	104.9 to 105.9 feet	**Vertical Change**	.83"	5 ft	5	REF		
126832	106.8 to 120.3 feet	Key Note Segment		5 ft	68			
126782	111.3 to 112.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
126806	121.0 to 139.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,220**
126807	143.3 to 166.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,620**
126839	177.2 to 178.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
126784	181.9 to 182.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
126833	183.7 to 200.0 feet	Key Note Segment		5 ft	82			
126808	200.3 to 202.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$460**
126809	203.0 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081310	MADISON DR	TYLER LN	HOOVER AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126785	203.4 to 204.4 feet	Vertical Change	-.29"	5 ft	5	REF		
126810	206.9 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
126834	212.3 to 225.2 feet	Key Note Segment		5 ft	65			
126811	225.2 to 230.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,140
126786	229.7 to 230.7 feet	Vertical Change	1.74"	5 ft	5	REF		
126812	232.0 to 235.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
126813	240.9 to 243.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
126814	244.1 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
126787	246.4 to 247.4 feet	Vertical Change	.27"	5 ft	5	REF		
126815	252.0 to 277.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	$15,000
126788	255.1 to 256.1 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
126816	278.4 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,420
126835	291.4 to 304.9 feet	Key Note Segment		5 ft	68			
126817	306.8 to 308.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
126818	313.2 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
126836	317.0 to 330.6 feet	Key Note Segment		5 ft	68			
126819	330.9 to 338.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	36	SF	$40	$1,440
126820	338.1 to 342.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
126821	343.5 to 350.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,200
126822	350.5 to 355.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
126823	359.2 to 360.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
126824	361.0 to 372.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
126790	369.0 to 370.0 feet	Vertical Change	-.43"	5 ft	5	REF		
126825	372.3 to 383.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	$6,600
126826	383.3 to 392.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
126791	384.9 to 385.9 feet	Vertical Change	-.29"	5 ft	5	REF		
126792	386.7 to 387.7 feet	Vertical Change	.31"	5 ft	5	REF		
126827	393.8 to 395.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081310	MADISON DR	TYLER LN	HOOVER AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126837	396.0 to 410.2 feet	Key Note Segment		5 ft	71			
126793	401.9 to 402.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
126828	414.2 to 420.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
126838	420.7 to 436.4 feet	Key Note Segment		5 ft	79			
126794	420.9 to 421.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
126795	430.6 to 431.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
126829	436.9 to 464.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,440**
126840	447.7 to 448.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: E *side of* **MADISON DR** *Starting at:* **TYLER LN** **$153,703.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281441	MADRID LN	COLOMBARD DR	MONTEREY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113034	0.0 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
113035	9.0 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
113071	11.9 to 32.0 feet	Key Note Segment		5 ft	101			
113013	32.1 to 33.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
113036	33.5 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
113072	50.3 to 69.4 feet	Key Note Segment		5 ft	96			
113037	72.4 to 89.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,500**
113014	78.3 to 79.3 feet	**Vertical Change**	.9"	5 ft	5	REF		
113073	90.1 to 109.6 feet	Key Note Segment		5 ft	98			
113015	94.6 to 95.6 feet	**Vertical Change**	1.28"	5 ft	5	REF		
113016	100.3 to 101.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
113017	109.9 to 110.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
113038	111.2 to 131.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	100	SF	$120	**$11,940**
113039	131.1 to 136.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
113018	131.6 to 132.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
113040	136.7 to 147.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
113041	147.8 to 169.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
113074	170.2 to 189.4 feet	Key Note Segment		5 ft	96			
113019	171.2 to 172.2 feet	**Vertical Change**	.92"	5 ft	5	REF		
113020	180.3 to 181.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113021	189.6 to 190.6 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
113042	190.9 to 194.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
113022	194.0 to 195.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
113043	194.6 to 200.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
113044	200.1 to 220.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,120**
113075	221.5 to 240.8 feet	Key Note Segment		5 ft	97			
113023	231.6 to 232.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
113045	244.3 to 252.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281441	MADRID LN	COLOMBARD DR	MONTEREY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113046	255.1 to 273.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**
113076	273.6 to 292.0 feet	Key Note Segment		5 ft	92			
113047	295.3 to 300.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
113077	300.3 to 317.8 feet	Key Note Segment		5 ft	88			
113024	308.7 to 309.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
113048	318.0 to 319.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
113025	319.1 to 320.1 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
113049	320.2 to 338.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
113050	338.8 to 345.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
113051	346.7 to 351.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
113052	352.2 to 362.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
113053	364.9 to 377.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
113078	377.3 to 396.0 feet	Key Note Segment		5 ft	94			
113054	397.7 to 401.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
113055	401.5 to 402.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
113079	403.3 to 421.8 feet	Key Note Segment		5 ft	93			
113026	412.7 to 413.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
113056	423.9 to 457.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	167	SF	$120	**$19,980**
113027	435.1 to 436.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
113057	457.4 to 468.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
113058	470.6 to 479.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
113028	480.8 to 481.8 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
113080	480.8 to 499.2 feet	Key Note Segment		5 ft	92			
113029	500.0 to 501.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
113059	500.3 to 506.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
113081	506.8 to 525.3 feet	Key Note Segment		5 ft	92			
113030	507.3 to 508.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
113060	526.0 to 534.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201281441	MADRID LN	COLOMBARD DR	MONTEREY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113061	535.4 to 555.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,240**
113062	558.5 to 570.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	58	SF	$120	**$6,900**
113063	570.6 to 583.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,440**
113082	583.3 to 602.9 feet	Key Note Segment		5 ft	98			
113031	584.2 to 585.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
113032	603.5 to 604.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
113064	604.4 to 606.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
113085	604.8 to 605.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
113065	606.7 to 614.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,380**
113066	614.0 to 619.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
113067	619.5 to 634.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,700**
113083	635.2 to 654.8 feet	Key Note Segment		5 ft	98			
113068	658.3 to 660.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
113084	660.9 to 680.8 feet	Key Note Segment		5 ft	100			
113069	682.3 to 689.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
113070	692.8 to 716.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,280**
113033	706.9 to 707.9 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MADRID LN** *Starting at:* **COLOMBARD DR** **$239,984.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281454	MADRID LN	CONCORD AVE	SENECA AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113175	0.0 to 23.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	119	SF	$120	**$14,220**
113162	10.2 to 11.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
113163	12.0 to 13.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
113164	14.1 to 20.2 feet	**Vertical Change**	-.31"	5 ft	31	REF		
113165	20.9 to 27.8 feet	**Vertical Change**	.32"	5 ft	35	REF		
113176	25.2 to 36.6 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	57	SF	$120	**$6,840**
113166	28.7 to 29.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
113167	30.4 to 38.2 feet	**Vertical Change**	.31"	5 ft	39	REF		
113168	38.9 to 39.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
113177	39.9 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
113169	40.7 to 41.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
113170	43.5 to 44.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113178	44.6 to 129.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	425	SF	$120	**$51,000**
113171	47.7 to 48.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
113172	60.9 to 61.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
113173	131.7 to 132.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
113179	132.7 to 153.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
113174	144.9 to 145.9 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MADRID LN** *Starting at:* **CONCORD AVE** **$86,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281443	MADRID LN	MONTEREY DR	CONCORD AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113088	0.2 to 33.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	168	SF	$120	**$20,160**
113089	39.0 to 52.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
113090	55.0 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,080**
113097	68.1 to 69.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
113091	89.0 to 116.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	139	SF	$120	**$16,680**
113086	89.6 to 90.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
113092	116.8 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
113087	121.9 to 122.9 feet	**Vertical Change**	3.37"	5 ft	5	REF		
113093	128.1 to 138.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
113094	141.1 to 153.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
113095	157.4 to 167.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
113096	167.4 to 171.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: S *side of* **MADRID LN** *Starting at:* **MONTEREY DR** **$92,079.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281503	MADRID LN	SENECA AVE	COLOMBARD DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113262	0.0 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
113263	23.2 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
113264	27.9 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
113276	37.7 to 38.7 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
113265	48.5 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
113266	65.2 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
113267	69.9 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
113268	83.1 to 93.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
113258	90.3 to 91.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
113269	96.2 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
113259	101.6 to 102.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
113277	105.6 to 106.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
113260	114.8 to 115.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
113270	115.3 to 116.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
113271	117.7 to 122.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
113272	122.2 to 124.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
113273	124.4 to 126.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
113274	128.5 to 129.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
113275	132.2 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
113261	140.2 to 141.2 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MADRID LN** *Starting at:* **SENECA AVE** **$80,958.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101414	MAGNOLIA ST	316 MAGNOLIA ST	320 MAGNOLIA ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131856	1.0 to 2.6 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	6	SF	$120	**$768**
131854	1.4 to 2.4 feet	**Vertical Change**	.9"	4 ft	4	REF		
131863	2.6 to 13.9 feet	Key Note Segment		4 ft	45			
131855	13.1 to 15.9 feet	**Vertical Change**	.35"	4 ft	11	REF		
131857	14.3 to 17.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	12	SF	$40	**$464**
131858	20.5 to 22.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$720**
131859	27.1 to 31.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	17	SF	$120	**$2,064**
131860	31.8 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
131861	40.1 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
131862	51.0 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
131864	66.8 to 81.0 feet	Key Note Segment		4 ft	57			

TOTAL COST FOR: SW *side of* **MAGNOLIA ST** *Starting at:* **316 MAGNOLIA ST** **$16,352.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101420	MAGNOLIA ST	331 MAGNOLIA ST	323 MAGNOLIA ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131900	0.4 to 15.8 feet	Key Note Segment		4 ft	62			
131877	1.6 to 2.6 feet	Vertical Change	-.43"	4 ft	4	REF		
131887	19.5 to 33.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	54	SF	$120	**$6,480**
131901	33.1 to 44.5 feet	Key Note Segment		4 ft	46			
131888	46.4 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
131889	49.7 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
131879	49.9 to 50.9 feet	Vertical Change	-.33"	4 ft	4	REF		
131890	53.9 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
131891	58.3 to 72.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	55	SF	$120	**$6,576**
131902	73.0 to 86.5 feet	Key Note Segment		4 ft	54			
131880	86.3 to 87.3 feet	Vertical Change	.28"	4 ft	4	REF		
131892	88.1 to 93.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
131881	94.8 to 95.8 feet	Vertical Change	.42"	4 ft	4	LF	$75	**$300**
131903	94.8 to 107.3 feet	Key Note Segment		4 ft	50			
131882	107.6 to 108.6 feet	Vertical Change	.35"	4 ft	4	LF	$75	**$300**
131893	109.4 to 111.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
131894	114.3 to 130.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	64	SF	$120	**$7,680**
131883	119.7 to 120.7 feet	Vertical Change	-.36"	4 ft	4	REF		
131884	128.4 to 129.4 feet	Vertical Change	.32"	4 ft	4	REF		
131895	130.3 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
131896	135.1 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
131897	139.0 to 142.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,632**
131904	142.4 to 168.2 feet	Key Note Segment		4 ft	103			
131885	166.3 to 167.3 feet	Vertical Change	.34"	4 ft	4	REF		
131886	170.5 to 171.5 feet	Vertical Change	.3"	4 ft	4	LF	$75	**$300**
131898	171.7 to 174.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
131899	177.3 to 181.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,872**

TOTAL COST FOR: NE *side of* **MAGNOLIA ST** *Starting at:* **331 MAGNOLIA ST** **$34,836.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101415	MAGNOLIA ST	334 MAGNOLIA ST	334 MAGNOLIA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131865	1.4 to 2.4 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
131868	5.6 to 13.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,744**
131866	10.8 to 11.8 feet	**Vertical Change**	-.52"	4 ft	4	REF		
131869	14.4 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
131867	20.3 to 21.3 feet	**Vertical Change**	.39"	4 ft	4	LF	$75	**$300**
131871	29.3 to 40.1 feet	Key Note Segment		4 ft	43			
131870	40.1 to 41.8 feet	**Cross Slope (Driveway)**	9.0-10.0%	4 ft	7	SF	$40	**$272**

TOTAL COST FOR: SW *side of* **MAGNOLIA ST** *Starting at:* **334 MAGNOLIA ST** **$6,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101417	MAGNOLIA ST	338 MAGNOLIA ST	CLINTON ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131874	0.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
131876	2.8 to 18.1 feet	Key Note Segment		5 ft	77			
131875	21.1 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
131872	26.6 to 27.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
131873	37.5 to 38.5 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **MAGNOLIA ST** *Starting at:* **338 MAGNOLIA ST** **$13,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101404	MAGNOLIA ST	911 WASHINGTON ST	WASHINGTON ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131832	4.9 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,264**
131833	11.9 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
131837	18.1 to 30.5 feet	Key Note Segment		4 ft	50			
131834	30.8 to 31.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
131835	34.3 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
131838	53.6 to 76.4 feet	Key Note Segment		4 ft	91			
131829	58.1 to 59.1 feet	**Vertical Change**	2.13"	4 ft	4	REF		
131830	64.1 to 65.1 feet	**Vertical Change**	.57"	4 ft	4	REF		
131831	75.5 to 76.5 feet	**Vertical Change**	.31"	4 ft	4	REF		
131836	122.1 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**

TOTAL COST FOR: SW *side of* **MAGNOLIA ST** *Starting at:* **911 WASHINGTON ST** **$10,992.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101401	MAGNOLIA ST	940 CROSS ST	940 CROSS ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131825	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
131826	3.5 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
131827	9.0 to 19.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	52	SF	$40	**$2,060**
131828	20.4 to 45.0 feet	Key Note Segment		5 ft	123			
131824	31.1 to 32.1 feet	**Vertical Change**	2.5"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **MAGNOLIA ST** *Starting at:* **940 CROSS ST** **$7,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121440	MAINBERRY DR	BAY CT	DRIFTWOOD DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96583	1.7 to 2.7 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
96589	6.1 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
96590	17.0 to 18.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
96591	18.6 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,220
96592	23.8 to 30.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,900
96593	30.5 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
96594	37.5 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	$17,700
96585	37.6 to 40.8 feet	Vertical Change	.69"	5 ft	16	REF		
96586	49.6 to 50.6 feet	Vertical Change	1.58"	5 ft	5	REF		
96595	75.4 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
96596	85.2 to 88.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
96597	88.9 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,900
96587	93.4 to 94.4 feet	Vertical Change	-.29"	5 ft	5	REF		
96588	105.5 to 106.5 feet	Vertical Change	1.18"	5 ft	5	SF	$75	$375
96598	111.2 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
96599	123.7 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
96600	133.7 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
96601	138.5 to 151.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	$7,860
96602	150.2 to 152.0 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **BAY CT** **$65,970.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121523	MAINBERRY DR	BAY VIEW DR	LIGHTHOUSE DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96997	0.0 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
96998	9.8 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96999	13.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
96980	18.5 to 19.5 feet	**Vertical Change**	-.45"	5 ft	5	REF		
97000	38.3 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
97021	43.3 to 59.3 feet	Key Note Segment		5 ft	80			
97001	59.3 to 60.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
97002	60.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
97003	66.3 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
96981	92.3 to 93.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
96982	96.4 to 97.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
97022	99.3 to 115.0 feet	Key Note Segment		5 ft	79			
96983	115.8 to 116.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
97023	137.8 to 152.8 feet	Key Note Segment		5 ft	75			
96984	138.0 to 139.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
97004	152.9 to 155.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$460**
97005	155.2 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
97028	171.4 to 173.8 feet		6.0-7.0%	5 ft	12			
97029	171.4 to 173.8 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
97006	190.8 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97024	194.3 to 210.3 feet	Key Note Segment		5 ft	80			
96987	195.4 to 196.4 feet	**Vertical Change**	-.5"	5 ft	5	REF		
97007	211.3 to 213.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
97008	213.9 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
96988	227.7 to 228.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
96989	242.6 to 243.6 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
97009	244.3 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
97025	256.1 to 272.7 feet	Key Note Segment		5 ft	83			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121523	MAINBERRY DR	BAY VIEW DR	LIGHTHOUSE DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97010	292.4 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
96990	314.3 to 315.3 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
97030	317.3 to 318.4 feet		5.0-6.0%	5 ft	5			
97026	320.2 to 342.9 feet	Key Note Segment		5 ft	114			
96991	321.3 to 322.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
96992	343.9 to 344.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
97011	348.0 to 355.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
97012	368.9 to 370.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
97027	371.3 to 384.7 feet	Key Note Segment		5 ft	67			
97013	387.3 to 391.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
97014	410.9 to 413.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97015	416.0 to 419.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
96993	422.3 to 423.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
97016	423.2 to 426.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
97017	433.8 to 435.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97018	439.8 to 453.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
96994	448.3 to 449.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
97019	464.6 to 471.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
96995	474.1 to 475.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
97020	488.8 to 495.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
96996	500.0 to 501.0 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **BAY VIEW DR** **$108,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121443	MAINBERRY DR	DRIFTWOOD DR	RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96615	0.0 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
96616	14.4 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
96617	21.0 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
96618	25.2 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
96634	31.3 to 45.3 feet	Key Note Segment		5 ft	70			
96603	32.0 to 33.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
96604	45.8 to 46.8 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
96619	49.0 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,880**
96605	52.0 to 53.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
96635	88.8 to 102.3 feet	Key Note Segment		5 ft	68			
96606	96.6 to 97.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
96620	106.8 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
96639	110.7 to 112.2 feet		5.0-6.0%	5 ft	8			
96607	114.4 to 115.4 feet	**Vertical Change**	.6"	5 ft	5	REF		
96640	116.5 to 117.5 feet		5.0-6.0%	5 ft	5			
96636	125.3 to 139.3 feet	Key Note Segment		5 ft	70			
96608	139.7 to 140.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
96621	142.0 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
96622	154.3 to 171.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
96623	171.7 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
96624	175.3 to 194.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
96625	194.8 to 212.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
96637	212.3 to 227.7 feet	Key Note Segment		5 ft	77			
96609	213.2 to 214.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
96626	228.3 to 251.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	118	SF	$40	**$4,700**
96627	258.3 to 264.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
96638	264.4 to 287.7 feet	Key Note Segment		5 ft	117			
96628	295.5 to 299.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121443	MAINBERRY DR	DRIFTWOOD DR	RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96610	301.0 to 302.0 feet	**Vertical Change**	2.02"	5 ft	5	SF	$75	**$375**
96629	303.4 to 305.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
96630	305.2 to 308.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
96631	308.7 to 310.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
96611	328.1 to 329.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
96632	335.3 to 336.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
96633	336.6 to 338.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
96612	342.6 to 343.6 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
96641	349.6 to 351.1 feet		5.0-6.0%	5 ft	8			
96613	359.6 to 360.6 feet	**Vertical Change**	2.64"	5 ft	5	SF	$75	**$375**
96642	365.8 to 367.1 feet		5.0-6.0%	5 ft	7			
96614	377.0 to 378.0 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **DRIFTWOOD DR** **$104,705.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121503	MAINBERRY DR	LIGHTHOUSE CT	VENTURI CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96889	3.5 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
96884	12.0 to 13.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
96890	15.3 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
96891	19.3 to 29.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
96885	24.5 to 25.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
96892	30.6 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
96886	37.3 to 38.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
96893	47.8 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
96894	72.3 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
96887	72.8 to 73.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
96895	75.9 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
96896	86.8 to 90.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
96897	92.0 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
96898	108.9 to 110.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
96899	112.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
96900	126.3 to 129.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
96901	131.5 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
96902	138.2 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
96903	143.2 to 159.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
96904	161.2 to 172.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
96905	174.8 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
96906	188.0 to 190.0 feet		5.0-6.0%	5 ft	10			
96888	190.5 to 191.5 feet	**Vertical Change**	.53"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **LIGHTHOUSE CT** **$91,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121245	MAINBERRY DR	LIGHTHOUSE DR	W PARK DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95240	0.8 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
95241	18.1 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
95242	23.2 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
95243	27.2 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
95244	32.3 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
95234	35.5 to 36.5 feet	**Vertical Change**	3.5"	5 ft	5	SF	$75	**$375**
95245	37.3 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
95235	55.7 to 56.7 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
95246	60.0 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
95236	66.8 to 70.3 feet	**Vertical Change**	.33"	5 ft	18	LF	$75	**$1,313**
95237	74.9 to 75.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
95247	93.4 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
95248	106.3 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
95249	114.0 to 122.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
95250	127.9 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
95251	135.3 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
95238	136.2 to 137.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
95239	162.3 to 163.3 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **LIGHTHOUSE DR** **$49,972.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121457	MAINBERRY DR	LIGHTHOUSE DR	LIGHTHOUSE CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96832	4.6 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
96827	9.6 to 10.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
96833	27.3 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
96829	36.8 to 37.8 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
96834	56.5 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
96835	66.5 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
96836	76.6 to 94.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
96837	94.8 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
96830	108.3 to 109.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
96838	110.3 to 112.9 feet		5.0-6.0%	5 ft	13			
96839	110.3 to 112.9 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
96831	114.1 to 115.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **LIGHTHOUSE DR** **$32,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121433	MAINBERRY DR	PACIFIC CT	BAY CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96494	9.8 to 10.8 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
96495	36.0 to 37.0 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
96496	57.4 to 58.4 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
96499	78.8 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
96497	91.3 to 92.3 feet	Vertical Change	2.4"	5 ft	5	REF		
96500	92.2 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96501	107.0 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
96502	112.8 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
96503	121.3 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
96504	130.5 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
96505	138.1 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
96498	143.0 to 144.0 feet	Vertical Change	-.74"	5 ft	5	SF	$75	**$375**
96506	148.9 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
96507	154.1 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **PACIFIC CT** **$16,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121454	MAINBERRY DR	PRIVATE	LIGHTHOUSE DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96788	0.0 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
96789	6.0 to 7.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
96790	7.6 to 10.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
96791	12.7 to 17.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
96792	17.8 to 25.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
96793	25.3 to 30.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
96794	30.8 to 33.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
96795	33.6 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
96796	42.2 to 43.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
96781	44.5 to 45.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
96797	44.8 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
96798	48.7 to 56.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
96799	57.2 to 65.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,740**
96800	66.7 to 71.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
96801	77.3 to 81.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
96802	81.6 to 82.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
96782	83.6 to 84.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
96803	84.4 to 91.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
96804	94.5 to 98.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
96805	104.4 to 137.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	167	SF	$120	**$20,040**
96783	130.4 to 131.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
96784	138.9 to 139.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
96806	139.3 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$13,020**
96785	155.4 to 156.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
96786	162.4 to 163.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
96807	163.4 to 164.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
96787	166.0 to 167.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **PRIVATE** **$79,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121514	MAINBERRY DR	PRIVATE	SUNSET AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96957	0.0 to 22.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,680**
96955	3.4 to 4.4 feet	**Vertical Change**	1.08"	5 ft	5	REF		
96958	25.8 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
96959	37.2 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,860**
96960	45.3 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
96961	54.0 to 59.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
96962	63.0 to 76.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
96963	76.5 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
96956	77.3 to 78.3 feet	**Vertical Change**	2.29"	5 ft	5	REF		
96964	83.3 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **PRIVATE** **$41,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121451	MAINBERRY DR	RIVERVIEW DR	PRIVATE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96665	0.0 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
96666	4.5 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
96667	12.3 to 24.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
96668	24.9 to 26.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
96669	30.0 to 40.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
96670	43.5 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
96776	46.3 to 47.4 feet		5.0-6.0%	5 ft	6			
96671	50.5 to 89.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	193	SF	$120	**$23,100**
96672	92.5 to 96.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
96673	96.4 to 101.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
96674	101.7 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
96675	105.6 to 111.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
96676	112.0 to 117.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,360**
96677	117.6 to 121.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	21	SF	$120	**$2,520**
96643	121.1 to 122.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
96678	121.8 to 131.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	50	SF	$120	**$6,000**
96679	132.5 to 149.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,900**
96680	151.4 to 166.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
96681	168.1 to 174.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
96682	177.8 to 196.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	94	SF	$120	**$11,280**
96683	196.8 to 199.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
96644	198.1 to 199.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
96684	199.9 to 205.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
96685	207.7 to 217.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
96686	217.6 to 222.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
96687	223.5 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
96645	225.0 to 226.0 feet	**Vertical Change**	.43"	5 ft	5	REF		
96688	228.3 to 233.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121451	MAINBERRY DR	RIVERVIEW DR	PRIVATE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96646	229.3 to 230.3 feet	Vertical Change	.78"	5 ft	5	REF		
96647	231.8 to 232.8 feet	Vertical Change	.27"	5 ft	5	REF		
96689	233.6 to 234.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
96690	237.0 to 238.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
96691	240.7 to 252.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
96692	254.6 to 283.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	144	SF	$120	**$17,220**
96648	284.1 to 285.1 feet	Vertical Change	.26"	5 ft	5	REF		
96693	284.4 to 288.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
96694	289.0 to 295.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
96649	292.8 to 293.8 feet	Vertical Change	.53"	5 ft	5	REF		
96695	296.3 to 308.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
96696	308.0 to 313.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
96697	314.1 to 315.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
96698	316.0 to 327.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
96699	328.3 to 330.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
96700	332.4 to 345.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
96701	346.9 to 350.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
96777	350.6 to 351.8 feet		7.0-8.0%	5 ft	6			
96702	350.8 to 352.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
96703	353.9 to 389.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
96650	391.2 to 392.2 feet	Vertical Change	-.27"	5 ft	5	REF		
96704	392.1 to 393.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
96705	396.3 to 399.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
96706	399.2 to 405.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
96707	412.8 to 428.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
96651	415.4 to 416.4 feet	Vertical Change	.61"	5 ft	5	REF		
96708	432.7 to 445.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
96709	448.4 to 462.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121451	MAINBERRY DR	RIVERVIEW DR	PRIVATE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96710	463.8 to 465.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
96711	468.7 to 483.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,060**
96712	484.6 to 491.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	36	SF	$120	**$4,320**
96713	491.8 to 496.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
96714	496.2 to 501.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
96715	504.1 to 511.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
96716	512.3 to 519.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
96717	520.5 to 533.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
96718	533.3 to 540.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
96775	540.3 to 565.2 feet	Key Note Segment		5 ft	125			
96652	542.6 to 543.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
96653	553.0 to 556.9 feet	**Vertical Change**	.33"	5 ft	20	REF		
96719	566.2 to 572.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,660**
96720	572.3 to 582.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
96721	582.1 to 588.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
96654	588.3 to 589.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
96722	589.3 to 591.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
96723	592.3 to 593.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
96724	594.3 to 610.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	80	SF	$120	**$9,600**
96725	610.7 to 614.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
96726	614.5 to 642.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	141	SF	$120	**$16,920**
96727	646.2 to 650.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
96728	650.7 to 654.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
96729	655.3 to 659.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
96730	660.4 to 663.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
96731	665.1 to 676.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
96655	677.9 to 678.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
96732	678.7 to 682.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121451	MAINBERRY DR	RIVERVIEW DR	PRIVATE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96733	682.9 to 690.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
96734	690.3 to 693.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
96735	695.4 to 711.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	**$9,360**
96736	711.7 to 716.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
96737	718.3 to 734.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
96738	734.6 to 738.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
96739	738.4 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
96740	743.8 to 770.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**
96656	755.2 to 756.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
96657	768.1 to 769.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
96741	773.8 to 785.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,840**
96742	785.5 to 792.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
96743	793.0 to 797.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
96744	797.9 to 807.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
96745	810.1 to 812.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
96746	812.6 to 813.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
96747	814.3 to 820.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
96748	825.1 to 830.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
96749	830.8 to 835.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
96750	838.7 to 840.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
96751	841.2 to 842.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
96752	847.6 to 857.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
96753	857.8 to 859.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
96754	860.5 to 864.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
96755	866.2 to 869.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	16	SF	$120	**$1,860**
96756	870.2 to 872.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
96778	871.6 to 872.8 feet		5.0-6.0%	5 ft	6			
96658	872.6 to 873.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121451	MAINBERRY DR	RIVERVIEW DR	PRIVATE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96757	873.3 to 875.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
96758	876.1 to 892.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
96759	892.5 to 915.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	**$13,860**
96659	910.5 to 911.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
96660	916.0 to 917.0 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
96760	918.9 to 920.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
96761	921.6 to 928.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
96762	928.5 to 930.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
96763	931.0 to 932.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
96764	933.8 to 943.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	48	SF	$120	**$5,700**
96661	935.6 to 936.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
96662	942.1 to 943.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
96765	946.9 to 948.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
96766	948.2 to 964.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
96767	964.8 to 967.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
96768	968.7 to 984.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
96769	986.6 to 1008.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
96663	993.6 to 994.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
96770	1011.2 to 1024.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
96771	1025.6 to 1030.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
96772	1030.3 to 1041.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
96773	1041.8 to 1062.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	105	SF	$120	**$12,600**
96664	1045.4 to 1046.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
96774	1062.8 to 1067.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
96779	1063.1 to 1066.7 feet		5.0-6.0%	5 ft	18			
96780	1063.1 to 1066.7 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **RIVERVIEW DR** **$546,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121517	MAINBERRY DR	SUNSET AVE	BAY VIEW DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96965	2.0 to 3.0 feet	Vertical Change	.66"	5 ft	5	SF	$75	**$375**
96966	7.8 to 8.8 feet	Vertical Change	2.65"	5 ft	5	SF	$75	**$375**
96975	12.3 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
96976	14.9 to 15.9 feet		5.0-6.0%	5 ft	5			
96967	15.1 to 16.1 feet	Vertical Change	-.65"	5 ft	5	REF		
96968	26.1 to 27.1 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
96969	32.9 to 33.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
96971	37.9 to 38.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
96972	41.1 to 42.1 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
96977	46.7 to 48.0 feet		5.0-6.0%	5 ft	7			
96978	48.0 to 50.5 feet		6.0-7.0%	5 ft	13			
96974	49.2 to 50.2 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
96979	53.1 to 54.1 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **SUNSET AVE** **$4,305.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121512	MAINBERRY DR	VENTURI CT	PRIVATE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96942	0.5 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
96937	14.6 to 15.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
96943	22.8 to 23.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
96944	26.6 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
96945	34.5 to 55.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
96939	51.9 to 52.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
96946	57.3 to 89.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	163	SF	$120	**$19,500**
96940	64.3 to 65.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
96947	90.5 to 92.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
96941	93.7 to 94.7 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
96948	96.0 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
96949	101.3 to 105.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
96950	107.4 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
96951	115.6 to 121.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
96952	123.5 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
96953	126.1 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
96954	130.0 to 134.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: W *side of* **MAINBERRY DR** *Starting at:* **VENTURI CT** **$67,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121425	MAINBERRY DR	W PARK DR	PACIFIC CT	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96409	0.3 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
96410	18.3 to 21.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
96411	25.2 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96412	30.0 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
96401	34.2 to 35.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
96402	40.5 to 41.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
96403	47.2 to 48.2 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
96413	51.6 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
96414	97.5 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
96404	100.9 to 101.9 feet	**Vertical Change**	.61"	5 ft	5	REF		
96415	104.0 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
96405	114.3 to 115.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
96406	126.6 to 127.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
96416	128.9 to 137.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
96407	139.7 to 140.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
96417	147.2 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
96418	154.6 to 163.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
96419	161.5 to 163.1 feet		5.0-6.0%	5 ft	8			
96408	163.0 to 164.0 feet	**Vertical Change**	.73"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MAINBERRY DR** *Starting at:* **W PARK DR** **$36,870.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201131	MAJESTIC CT	1254 MAJESTIC CT	1294 MAJESTIC CT	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76121	3.3 to 15.6 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	55	SF	$120	**$6,642**
76122	20.5 to 31.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,832**
76115	29.7 to 30.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
76123	32.6 to 40.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,158**
76116	38.0 to 39.0 feet	**Vertical Change**	1.11"	5 ft	5	REF		
76124	41.2 to 46.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	25	SF	$120	**$3,024**
76125	46.8 to 47.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$540**
76126	47.8 to 62.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,830**
76117	55.1 to 56.1 feet	**Vertical Change**	.76"	5 ft	5	REF		
76134	62.3 to 83.0 feet	Key Note Segment		5 ft	93			
76127	84.6 to 87.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
76128	91.7 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,214**
76118	95.1 to 96.1 feet	**Vertical Change**	.58"	5 ft	5	REF		
76129	96.5 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,672**
76130	103.5 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
76119	104.4 to 105.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
76131	114.3 to 119.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
76132	122.0 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
76135	124.6 to 145.0 feet	Key Note Segment		5 ft	92			
76133	151.9 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,510**
76120	162.0 to 163.0 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: W *side of* **MAJESTIC CT** *Starting at:* **1254 MAJESTIC CT** **$46,723.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201135	MAJESTIC CT	1295 MAJESTIC CT	GARY LN	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76159	0.2 to 1.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$540**
76160	3.3 to 5.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,026**
76174	5.2 to 23.0 feet	Key Note Segment		5 ft	80			
76161	28.5 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,046**
76136	29.6 to 30.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
76162	49.4 to 51.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
76163	52.0 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,782**
76164	57.4 to 59.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
76137	62.0 to 63.0 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$338**
76165	65.7 to 73.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,374**
76175	74.8 to 99.7 feet	Key Note Segment		5 ft	112			
76166	105.2 to 114.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,752**
76139	105.7 to 106.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
76140	112.3 to 113.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
76167	115.8 to 126.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	50	SF	$120	**$5,940**
76176	128.4 to 148.7 feet	Key Note Segment		5 ft	91			
76168	150.2 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
76177	153.4 to 174.9 feet	Key Note Segment		5 ft	97			
76141	169.1 to 170.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
76169	175.8 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
76142	178.5 to 179.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
76143	185.0 to 186.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
76170	191.3 to 230.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	177	SF	$120	**$21,276**
76144	197.9 to 198.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
76145	206.7 to 207.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
76146	212.4 to 213.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
76147	217.1 to 218.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
76178	230.7 to 251.8 feet	Key Note Segment		5 ft	95			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201135	MAJESTIC CT	1295 MAJESTIC CT	GARY LN	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76148	235.3 to 236.3 feet	Vertical Change	-.38"	5 ft	5	REF		
76171	252.1 to 256.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	21	SF	$40	**$846**
76149	253.1 to 254.1 feet	Vertical Change	-.32"	5 ft	5	REF		
76179	256.8 to 278.0 feet	Key Note Segment		5 ft	95			
76150	258.5 to 259.5 feet	Vertical Change	.59"	5 ft	5	REF		
76151	279.8 to 283.7 feet	Vertical Change	.27"	5 ft	18	LF	$75	**$1,316**
76172	283.1 to 288.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,132**
76152	287.4 to 290.2 feet	Vertical Change	.4"	5 ft	13	REF		
76153	291.1 to 292.1 feet	Vertical Change	.66"	5 ft	5	SF	$75	**$338**
76154	293.4 to 294.4 feet	Vertical Change	1"	5 ft	5	SF	$75	**$338**
76155	295.1 to 297.8 feet	Vertical Change	.5"	5 ft	12	SF	$75	**$911**
76156	298.5 to 301.2 feet	Vertical Change	-.29"	5 ft	12	LF	$75	**$911**
76157	302.0 to 304.6 feet	Vertical Change	.4"	5 ft	12	LF	$75	**$878**
76173	305.3 to 307.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
76158	305.5 to 306.5 feet	Vertical Change	-.33"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MAJESTIC CT** *Starting at:* **1295 MAJESTIC CT** **$68,946.75**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201129	MAJESTIC CT	GARY LN	1232 MAJESTIC CT	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76103	2.8 to 12.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,238**
76093	5.7 to 6.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
76094	7.4 to 8.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
76095	12.4 to 13.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
76104	14.2 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
76096	16.3 to 17.3 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$338**
76105	17.8 to 19.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$918**
76097	19.9 to 20.9 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$338**
76106	21.2 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
76113	26.2 to 46.4 feet	Key Note Segment		5 ft	91			
76098	46.1 to 47.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76107	47.6 to 50.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,512**
76114	51.0 to 73.1 feet	Key Note Segment		5 ft	99			
76099	69.7 to 73.1 feet	**Vertical Change**	.48"	5 ft	15	REF		
76108	73.1 to 79.7 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	30	SF	$40	**$1,188**
76100	77.2 to 78.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
76109	82.4 to 85.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,566**
76110	85.3 to 96.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,102**
76101	86.6 to 87.6 feet	**Vertical Change**	.65"	5 ft	5	REF		
76111	97.8 to 114.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,856**
76102	111.3 to 112.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
76112	117.1 to 126.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,184**

TOTAL COST FOR: W *side of* **MAJESTIC CT** *Starting at:* **GARY LN** **$32,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201205	MAJESTIC WAY	BO TREE LN	GARY LN	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76390	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
76391	2.3 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
76392	7.0 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
76393	9.2 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	222	SF	$120	**$26,580**
76385	41.7 to 42.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
76394	55.8 to 65.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
76386	84.9 to 85.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
76395	89.8 to 98.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
76396	101.4 to 105.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
76397	107.9 to 111.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
76398	113.8 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
76404	127.2 to 147.8 feet	Key Note Segment		5 ft	103			
76399	148.3 to 154.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,220**
76405	154.4 to 173.0 feet	Key Note Segment		5 ft	93			
76387	157.5 to 158.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
76388	164.0 to 165.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
76389	173.6 to 174.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
76400	173.6 to 174.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
76401	177.8 to 179.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
76402	182.9 to 184.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
76403	185.7 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**

TOTAL COST FOR: W *side of* **MAJESTIC WAY** *Starting at:* **BO TREE LN** **$63,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201208	MAJESTIC WAY	GARY LN	BO TREE LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76410	1.1 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
76411	4.7 to 9.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
76412	10.9 to 17.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
76423	17.7 to 38.1 feet	Key Note Segment		5 ft	102			
76406	18.7 to 19.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76407	35.6 to 36.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
76413	38.5 to 44.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,240**
76424	44.7 to 63.9 feet	Key Note Segment		5 ft	96			
76408	48.1 to 49.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76414	64.6 to 80.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
76415	87.8 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
76416	95.7 to 99.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
76417	102.3 to 104.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
76425	104.5 to 125.3 feet	Key Note Segment		5 ft	104			
76409	108.3 to 109.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
76418	125.3 to 138.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	68	SF	$40	**$2,700**
76419	140.1 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
76420	158.9 to 181.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,440**
76421	187.4 to 193.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
76422	195.8 to 197.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: E *side of* **MAJESTIC WAY** *Starting at:* **GARY LN** **$57,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121028	MAKENNA DR	DESERT RANCH WAY	MAPLE ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94457	3.1 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
94458	8.9 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
94454	12.1 to 13.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
94459	12.4 to 13.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
94460	17.5 to 20.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
94461	25.3 to 27.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
94462	31.0 to 44.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
94455	37.7 to 38.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
94463	47.8 to 60.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
94456	59.5 to 60.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
94464	64.3 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94465	70.7 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
94466	78.9 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
94467	89.6 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
94468	99.7 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
94469	112.0 to 115.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
94470	116.0 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
94471	121.8 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
94472	129.2 to 148.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**

TOTAL COST FOR: E *side of* **MAKENNA DR** *Starting at:* **DESERT RANCH WAY** **$62,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201120919	MAKENNA DR	EAGLE WAY	HOWARD RD	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93739	0.8 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93734	7.8 to 8.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
93740	8.3 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
93735	12.6 to 15.8 feet	**Vertical Change**	2.47"	5 ft	16	REF		
93741	21.5 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
93742	39.8 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
93736	53.4 to 54.4 feet	**Vertical Change**	2.45"	5 ft	5	SF	$75	**$375**
93737	69.3 to 70.3 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
93743	74.9 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
93738	84.1 to 85.1 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MAKENNA DR** *Starting at:* **EAGLE WAY** **$16,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120928	MAKENNA DR	HOWARD RD	OAK ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93806	2.8 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
93807	21.9 to 24.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
93808	27.2 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
93826	29.8 to 51.5 feet	Key Note Segment		5 ft	109			
93790	31.6 to 32.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93791	49.9 to 50.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
93809	52.6 to 57.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
93810	58.2 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
93811	62.5 to 63.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
93812	64.4 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
93827	65.8 to 86.9 feet	Key Note Segment		5 ft	106			
93792	83.1 to 84.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
93793	85.8 to 86.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
93813	87.0 to 90.0 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	15	SF	$40	**$600**
93814	90.8 to 102.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
93794	99.6 to 100.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
93815	105.0 to 121.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	82	SF	$120	**$9,780**
93816	121.6 to 127.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
93817	127.7 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
93818	132.5 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
93828	151.1 to 172.7 feet	Key Note Segment		5 ft	108			
93795	152.5 to 156.1 feet	**Vertical Change**	-.37"	5 ft	18	REF		
93796	162.4 to 163.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
93797	172.5 to 173.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
93819	173.3 to 179.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	33	SF	$40	**$1,320**
93820	185.2 to 189.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
93829	189.7 to 210.6 feet	Key Note Segment		5 ft	105			
93798	191.0 to 194.7 feet	**Vertical Change**	-.31"	5 ft	19	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120928	MAKENNA DR	HOWARD RD	OAK ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93799	200.6 to 201.6 feet	Vertical Change	.39"	5 ft	5	REF		
93821	227.9 to 237.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
93822	239.4 to 247.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
93830	248.4 to 270.8 feet	Key Note Segment		5 ft	112			
93801	252.7 to 253.7 feet	Vertical Change	.26"	5 ft	5	REF		
93802	260.5 to 261.5 feet	Vertical Change	2.18"	5 ft	5	REF		
93803	266.9 to 267.9 feet	Vertical Change	-.3"	5 ft	5	REF		
93804	269.5 to 270.5 feet	Vertical Change	.33"	5 ft	5	REF		
93823	271.7 to 276.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
93824	278.3 to 291.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
93805	285.6 to 286.6 feet	Vertical Change	.36"	5 ft	5	REF		
93825	291.3 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: W *side of* **MAKENNA DR** *Starting at:* **HOWARD RD** **$82,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121040	MAKENNA DR	MAPLE ST	PLUMAS ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94591	0.8 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
94585	1.0 to 2.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
94592	6.5 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
94586	7.5 to 8.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
94593	11.5 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
94594	15.3 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
94595	23.0 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
94596	35.7 to 61.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,660**
94587	37.0 to 38.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
94588	46.3 to 47.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
94597	63.4 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
94598	69.8 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,900**
94599	94.0 to 98.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
94600	100.3 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
94601	104.8 to 107.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
94602	110.0 to 133.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	118	SF	$120	**$14,220**
94589	134.7 to 135.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
94603	134.9 to 145.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
94590	145.6 to 146.6 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MAKENNA DR** *Starting at:* **MAPLE ST** **$75,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120952	MAKENNA DR	MAPLE ST	DESERT RANCH WAY	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94022	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
94023	2.5 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
94024	8.9 to 18.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
94016	10.8 to 11.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
94036	22.6 to 44.3 feet	Key Note Segment		5 ft	109			
94017	23.3 to 24.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
94018	42.0 to 43.0 feet	**Vertical Change**	2"	5 ft	5	REF		
94025	44.3 to 49.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	27	SF	$40	**$1,080**
94026	51.3 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
94037	54.8 to 75.5 feet	Key Note Segment		5 ft	104			
94027	99.3 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
94028	104.0 to 106.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
94029	111.8 to 115.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
94038	118.6 to 139.1 feet	Key Note Segment		5 ft	103			
94030	140.3 to 143.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
94031	145.4 to 147.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
94032	148.8 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
94033	167.0 to 168.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
94034	168.6 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
94019	173.8 to 174.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
94039	182.4 to 208.9 feet	Key Note Segment		5 ft	133			
94020	195.4 to 196.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
94035	208.9 to 214.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	26	SF	$40	**$1,020**
94021	212.2 to 213.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MAKENNA DR** *Starting at:* **MAPLE ST** **$36,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201120903	MAKENNA DR	OAK ST	EAGLE WAY	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93599	5.3 to 6.3 feet		5.0-6.0%	5 ft	5			
93583	6.4 to 7.4 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
93584	8.2 to 9.2 feet	Vertical Change	-.71"	5 ft	5	SF	$75	**$375**
93593	15.1 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
93594	26.8 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
93595	41.8 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
93585	46.4 to 47.4 feet	Vertical Change	-.35"	5 ft	5	REF		
93586	60.4 to 61.4 feet	Vertical Change	1.12"	5 ft	5	SF	$75	**$375**
93600	60.7 to 61.7 feet		5.0-6.0%	5 ft	5			
93601	61.7 to 62.8 feet		6.0-7.0%	5 ft	6			
93587	67.4 to 68.4 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**
93602	77.9 to 78.9 feet		5.0-6.0%	5 ft	5			
93596	82.4 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
93588	86.9 to 87.9 feet	Vertical Change	.86"	5 ft	5	SF	$75	**$375**
93589	118.2 to 119.2 feet	Vertical Change	-.63"	5 ft	5	SF	$75	**$375**
93597	122.4 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
93590	136.7 to 137.7 feet	Vertical Change	.44"	5 ft	5	REF		
93591	143.0 to 144.0 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$375**
93598	146.2 to 148.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
93603	146.8 to 148.8 feet		5.0-6.0%	5 ft	10			
93592	149.3 to 150.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **MAKENNA DR** *Starting at:* **OAK ST** **$28,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121050	MAKENNA DR	PLUMAS ST	MAPLE ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94677	1.1 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
94693	4.3 to 24.9 feet	Key Note Segment		5 ft	103			
94670	4.8 to 5.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
94678	27.4 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
94671	33.4 to 34.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94679	37.1 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
94680	41.3 to 45.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
94672	42.8 to 43.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
94681	52.6 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
94682	63.2 to 72.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
94683	75.1 to 76.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
94694	78.7 to 101.8 feet	Key Note Segment		5 ft	116			
94673	80.2 to 81.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
94684	103.0 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
94674	105.1 to 106.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94685	109.3 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94686	115.7 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
94687	123.3 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
94688	133.4 to 134.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94695	137.0 to 157.4 feet	Key Note Segment		5 ft	102			
94689	157.9 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
94696	166.3 to 186.8 feet	Key Note Segment		5 ft	103			
94675	167.6 to 168.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
94690	188.8 to 190.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94691	195.3 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
94692	206.7 to 213.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
94676	212.8 to 213.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MAKENNA DR** *Starting at:* **PLUMAS ST** **$47,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108121402	MALONE ST	313 MALONE ST	WASHINGTON ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60946	0.0 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
60939	12.8 to 13.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$338**
60947	16.9 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
60961	20.1 to 40.6 feet	Key Note Segment		5 ft	92			
60940	30.7 to 31.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
60948	41.3 to 48.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,368**
60941	42.1 to 43.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
60949	51.3 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,350**
60962	54.4 to 75.8 feet	Key Note Segment		5 ft	96			
60950	76.6 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,886**
60942	84.5 to 85.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
60951	90.1 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
60943	112.5 to 113.5 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$338**
60952	114.8 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**
60963	123.6 to 145.7 feet	Key Note Segment		5 ft	99			
60953	145.7 to 148.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$486**
60954	152.6 to 155.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
60955	157.7 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
60956	167.3 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
60964	176.9 to 196.9 feet	Key Note Segment		5 ft	90			
60957	199.7 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,374**
60944	208.3 to 209.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$338**
60965	208.8 to 229.4 feet	Key Note Segment		5 ft	93			
60945	219.4 to 220.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
60958	234.8 to 240.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
60959	245.8 to 250.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
60960	250.0 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: NE *side of* **MALONE ST** *Starting at:* **313 MALONE ST** **$36,616.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121409	MALONE ST	324 MALONE ST	CLINTON ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60985	0.3 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,290**
60973	1.5 to 2.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
60974	8.0 to 9.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
60975	10.9 to 11.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
60986	13.8 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
60987	17.7 to 20.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,296**
61006	20.3 to 49.1 feet	Key Note Segment		5 ft	130			
60988	49.9 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,618**
60977	57.7 to 58.7 feet	**Vertical Change**	2.56"	5 ft	5	SF	$75	**$338**
60989	58.8 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
60990	68.2 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
60978	76.8 to 77.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$338**
60991	86.4 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
60992	92.5 to 93.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$594**
60979	100.8 to 101.8 feet	**Vertical Change**	-.52"	5 ft	5	REF		
60993	100.9 to 105.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,538**
61007	106.8 to 134.4 feet	Key Note Segment		5 ft	124			
60980	125.5 to 126.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
60994	136.0 to 157.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,826**
61008	157.9 to 186.8 feet	Key Note Segment		5 ft	130			
60995	187.7 to 189.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$756**
60981	188.1 to 189.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
60996	190.0 to 198.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,590**
60982	197.2 to 198.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
60997	198.5 to 200.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$864**
60998	202.2 to 205.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,998**
60999	205.9 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,026**
61000	207.8 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,066**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121409	MALONE ST	324 MALONE ST	CLINTON ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61001	236.7 to 244.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,050**
60983	241.2 to 242.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
61002	244.2 to 245.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$918**
61003	245.9 to 250.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,214**
61004	250.0 to 252.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,350**
61005	254.3 to 256.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,350**
61009	254.3 to 256.0 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: SW *side of* **MALONE ST** *Starting at:* **324 MALONE ST** **$71,793.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271116	MANDANA WAY	FAIRWAY AVE	MATEO WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110717	0.0 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
110718	2.6 to 9.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
110719	14.4 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
110726	25.7 to 54.7 feet	Key Note Segment		5 ft	145			
110710	28.8 to 29.8 feet	**Vertical Change**	-.65"	5 ft	5	REF		
110711	52.5 to 53.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
110720	56.3 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
110712	61.2 to 62.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110721	65.8 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
110727	67.3 to 96.4 feet	Key Note Segment		5 ft	146			
110713	96.3 to 97.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
110722	98.8 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
110723	101.8 to 111.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
110724	113.8 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$15,900**
110728	140.8 to 171.7 feet	Key Note Segment		5 ft	154			
110715	159.0 to 160.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
110725	173.9 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
110716	174.0 to 175.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MANDANA WAY** *Starting at:* **FAIRWAY AVE** **$51,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271128	MANDANA WAY	MATEO WAY	FAIRWAY AVE	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110814	0.5 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
110815	13.0 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
110816	23.3 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
110817	32.7 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
110810	33.0 to 34.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
110818	55.5 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
110819	68.0 to 111.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	216	SF	$120	**$25,860**
110811	84.5 to 85.5 feet	**Vertical Change**	2.87"	5 ft	5	REF		
110820	114.9 to 117.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
110821	123.4 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
110812	131.5 to 132.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
110822	136.1 to 142.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
110823	142.9 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
110824	150.3 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
110813	157.6 to 158.6 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **MANDANA WAY** *Starting at:* **MATEO WAY** **$72,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201204	MANGO AVE	LEMON AVE	LIME AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105029	0.2 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
105030	11.2 to 21.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
105031	24.1 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
105032	28.2 to 48.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
105033	48.6 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
105034	62.7 to 155.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	462	SF	$120	**$55,440**
105035	89.8 to 90.8 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
105026	110.2 to 111.2 feet	**Vertical Change**	1.61"	5 ft	5	REF		
105027	120.6 to 121.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
105036	141.1 to 142.1 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
105028	152.4 to 153.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MANGO AVE** *Starting at:* **LEMON AVE** **$91,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201206	MANGO AVE	LIME AVE	TANGERINE AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105040	2.1 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	240	SF	$120	**$28,740**
105037	6.7 to 7.7 feet	**Vertical Change**	-.47"	5 ft	5	REF		
105038	37.2 to 38.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
105041	50.3 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
105042	68.3 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
105043	72.3 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,320**
105044	116.0 to 124.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
105045	124.3 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
105046	131.4 to 133.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
105047	136.3 to 145.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
105048	145.9 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
105039	149.7 to 150.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **MANGO AVE** *Starting at:* **LIME AVE** **$83,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201200	MANGO AVE	RAYMOND THOMAS ST	LEMON AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104985	0.0 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
104966	5.4 to 6.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
104967	15.5 to 16.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
105014	22.8 to 46.3 feet	Key Note Segment		5 ft	118			
104968	26.8 to 27.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104969	34.1 to 35.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
104986	47.6 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
104987	49.2 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
105015	54.9 to 76.3 feet	Key Note Segment		5 ft	107			
104970	55.4 to 56.4 feet	**Vertical Change**	.77"	5 ft	5	REF		
104988	80.1 to 83.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
104989	84.7 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
104971	97.3 to 98.3 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
104990	98.8 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
104972	106.6 to 107.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
104991	111.8 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
104992	125.0 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
105016	128.3 to 147.5 feet	Key Note Segment		5 ft	96			
104993	150.6 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
105017	157.8 to 177.9 feet	Key Note Segment		5 ft	100			
104973	177.7 to 178.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
104994	178.8 to 179.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
105024	179.5 to 180.5 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
104995	182.9 to 213.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
104996	213.9 to 227.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
105018	230.8 to 250.8 feet	Key Note Segment		5 ft	100			
104974	231.9 to 232.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
104975	241.6 to 242.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201200	MANGO AVE	RAYMOND THOMAS ST	LEMON AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105025	250.8 to 251.8 feet		5.0-6.0%	5 ft	5			
104997	251.3 to 255.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	22	SF	$40	$880
104998	255.7 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
105019	258.9 to 277.8 feet	Key Note Segment		5 ft	95			
104976	259.6 to 260.6 feet	Vertical Change	-.59"	5 ft	5	REF		
104977	269.2 to 270.2 feet	Vertical Change	-.4"	5 ft	5	REF		
104999	280.6 to 287.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
105000	287.8 to 294.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
105001	297.3 to 314.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	$10,500
104978	314.7 to 315.7 feet	Vertical Change	.29"	5 ft	5	REF		
105002	315.1 to 325.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
105020	326.2 to 345.3 feet	Key Note Segment		5 ft	96			
104979	326.9 to 327.9 feet	Vertical Change	-.28"	5 ft	5	REF		
105003	350.3 to 353.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
105021	353.7 to 372.3 feet	Key Note Segment		5 ft	93			
104980	373.1 to 374.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
105004	375.4 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
105005	381.7 to 387.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
105006	387.3 to 393.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
105007	393.8 to 413.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	$11,580
105008	414.1 to 421.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
105022	422.5 to 442.0 feet	Key Note Segment		5 ft	98			
104981	423.4 to 424.4 feet	Vertical Change	.3"	5 ft	5	REF		
104982	442.1 to 443.1 feet	Vertical Change	-.49"	5 ft	5	REF		
105009	444.4 to 447.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
105023	448.8 to 467.8 feet	Key Note Segment		5 ft	95			
104983	449.4 to 450.4 feet	Vertical Change	-.82"	5 ft	5	REF		
105010	469.6 to 476.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201200	MANGO AVE	RAYMOND THOMAS ST	LEMON AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105011	478.6 to 489.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
105012	494.9 to 496.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
105013	502.3 to 503.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **MANGO AVE** *Starting at:* **RAYMOND THOMAS ST** **$139,909.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201155	MANGO AVE	TANGERINE AVE	RAYMOND THOMAS ST	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104964	0.0 to 32.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	165	SF	$120	**$19,740**
104963	19.0 to 20.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
104965	32.9 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	187	SF	$120	**$22,380**

TOTAL COST FOR: N *side of* **MANGO AVE** *Starting at:* **TANGERINE AVE** **$42,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171214	MANRESA DR	3534 MANRESA DR	SANTA LUCIA DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89430	0.0 to 9.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
89431	12.6 to 22.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
89432	20.8 to 22.3 feet		5.0-6.0%	5 ft	8			
89429	22.2 to 23.2 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MANRESA DR** *Starting at:* **3534 MANRESA DR** **$11,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171212	MANRESA DR	ASILOMAR DR	3534 MANRESA DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89411	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
89406	6.7 to 7.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
89412	13.6 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89413	20.8 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89423	22.5 to 45.2 feet	Key Note Segment		5 ft	114			
89414	45.8 to 54.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
89424	54.3 to 73.8 feet	Key Note Segment		5 ft	98			
89415	78.6 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
89428	86.2 to 87.3 feet		5.0-6.0%	5 ft	6			
89407	96.5 to 97.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
89416	108.8 to 110.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
89425	111.3 to 130.8 feet	Key Note Segment		5 ft	98			
89408	121.1 to 122.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
89417	133.8 to 140.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
89418	140.8 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
89419	146.4 to 160.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
89409	146.6 to 147.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
89420	161.3 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
89421	167.3 to 193.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
89410	181.7 to 182.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
89426	194.4 to 213.9 feet	Key Note Segment		5 ft	98			
89422	216.3 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
89427	221.3 to 240.9 feet	Key Note Segment		5 ft	98			

TOTAL COST FOR: S *side of* **MANRESA DR** *Starting at:* **ASILOMAR DR** **$63,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171216	MANRESA DR	SANTA LUCIA DR	ASILOMAR DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89438	1.3 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
89451	25.3 to 44.4 feet	Key Note Segment		5 ft	96			
89439	45.0 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
89452	52.7 to 71.4 feet	Key Note Segment		5 ft	94			
89433	62.2 to 63.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
89440	72.8 to 94.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
89441	95.2 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
89442	99.4 to 111.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
89453	111.6 to 131.7 feet	Key Note Segment		5 ft	100			
89443	133.1 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
89434	142.6 to 143.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
89444	147.6 to 164.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
89435	154.8 to 155.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
89445	167.6 to 183.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
89446	186.7 to 189.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
89454	193.3 to 213.9 feet	Key Note Segment		5 ft	103			
89436	203.7 to 204.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
89447	215.0 to 219.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
89448	220.4 to 221.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89455	222.7 to 251.3 feet	Key Note Segment		5 ft	143			
89449	251.4 to 254.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$580**
89450	257.3 to 267.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
89456	266.5 to 267.5 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: N *side of* **MANRESA DR** *Starting at:* **SANTA LUCIA DR** **$79,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101539	MANZANA CT	401 MANZANA CT	CLINTON ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132326	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
132324	6.5 to 7.5 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
132328	6.6 to 26.3 feet	Key Note Segment		5 ft	99			
132325	27.3 to 28.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
132327	28.1 to 29.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: NE *side of* **MANZANA CT** *Starting at:* **401 MANZANA CT** **$2,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101538	MANZANA CT	407 MANZANA CT	403 MANZANA CT	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132321	0.2 to 18.4 feet	Key Note Segment		5 ft	91			
132313	21.4 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
132314	34.8 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
132315	44.9 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
132316	49.7 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132317	54.5 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
132322	64.9 to 85.3 feet	Key Note Segment		5 ft	102			
132309	79.4 to 80.4 feet	**Vertical Change**	.98"	5 ft	5	REF		
132318	86.8 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
132310	91.3 to 92.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
132323	91.3 to 111.2 feet	Key Note Segment		5 ft	100			
132311	112.1 to 113.1 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
132319	113.4 to 119.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
132320	121.2 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
132312	126.7 to 127.7 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **MANZANA CT** *Starting at:* **407 MANZANA CT** **$35,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101529	MANZANA CT	420 MANZANA CT	AVILA WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132229	0.1 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
132230	13.5 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
132231	21.5 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
132232	29.8 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,300**
132233	37.3 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
132227	49.9 to 50.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
132234	52.8 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
132235	63.7 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
132236	76.4 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
132228	78.8 to 79.8 feet	**Vertical Change**	.56"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **MANZANA CT** *Starting at:* **420 MANZANA CT** **$33,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101536	MANZANA CT	451 MANZANA CT	409 MANZANA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132278	1.3 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
132279	17.9 to 19.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
132280	19.9 to 21.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
132281	21.8 to 23.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
132282	25.9 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
132283	30.0 to 36.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	31	SF	$120	**$3,720**
132284	36.3 to 37.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
132301	38.3 to 59.3 feet	Key Note Segment		5 ft	105			
132271	59.5 to 60.5 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
132285	61.8 to 63.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
132302	64.3 to 84.7 feet	Key Note Segment		5 ft	102			
132272	74.9 to 75.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
132286	85.9 to 87.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
132287	88.8 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
132288	95.5 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
132273	100.4 to 101.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
132289	120.8 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
132303	124.3 to 146.0 feet	Key Note Segment		5 ft	109			
132274	124.4 to 125.4 feet	**Vertical Change**	2.12"	5 ft	5	REF		
132275	135.5 to 136.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
132290	148.2 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
132304	151.2 to 171.1 feet	Key Note Segment		5 ft	100			
132291	174.5 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
132292	178.7 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
132293	190.1 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
132294	200.0 to 210.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
132305	211.0 to 232.1 feet	Key Note Segment		5 ft	106			
132276	232.4 to 233.4 feet	**Vertical Change**	.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101536	MANZANA CT	451 MANZANA CT	409 MANZANA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132295	234.3 to 236.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
132296	236.2 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
132306	255.1 to 274.8 feet	Key Note Segment		5 ft	99			
132277	260.1 to 261.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
132297	277.2 to 280.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
132298	281.0 to 285.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132299	285.3 to 296.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
132300	298.8 to 304.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
132307	304.4 to 323.9 feet	Key Note Segment		5 ft	98			

TOTAL COST FOR: NE *side of* **MANZANA CT** *Starting at:* **451 MANZANA CT** **$74,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101533	MANZANA CT	467 MANZANA CT	459 MANZANA CT	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132261	2.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
132262	15.6 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
132269	18.3 to 37.9 feet	Key Note Segment		5 ft	98			
132263	42.3 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
132264	48.0 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
132265	59.4 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
132266	64.5 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
132267	67.9 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,620**
132270	70.8 to 88.1 feet	Key Note Segment		5 ft	87			
132268	88.1 to 89.5 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	7	SF	$40	**$280**

TOTAL COST FOR: NE *side of* **MANZANA CT** *Starting at:* **467 MANZANA CT** **$17,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101532	MANZANA CT	AVILA WAY	468 MANZANA CT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132244	0.0 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
132237	1.2 to 2.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
132238	4.5 to 5.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
132258	18.8 to 38.3 feet	Key Note Segment		5 ft	97			
132239	33.9 to 34.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
132240	39.6 to 40.6 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
132259	41.0 to 60.0 feet	Key Note Segment		5 ft	95			
132245	61.8 to 64.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
132246	64.4 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
132247	70.9 to 72.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
132248	75.1 to 86.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
132249	89.1 to 98.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
132250	99.4 to 100.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
132251	100.8 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
132252	114.6 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
132260	137.5 to 158.8 feet	Key Note Segment		5 ft	107			
132253	161.8 to 170.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,980**
132242	166.5 to 167.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
132254	170.3 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
132255	183.6 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
132243	184.5 to 185.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
132256	206.4 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
132257	210.4 to 211.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: SW *side of* **MANZANA CT** *Starting at:* **AVILA WAY** **$66,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101528	MANZANA CT	CLINTON ST	406 MANZANA CT	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132208	1.0 to 2.0 feet	Vertical Change	1.2"	5 ft	5	REF		
132213	1.6 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
132214	5.3 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
132223	18.1 to 37.3 feet	Key Note Segment		5 ft	96			
132215	39.8 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
132224	43.7 to 63.6 feet	Key Note Segment		5 ft	100			
132216	68.1 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
132217	90.2 to 99.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
132218	101.3 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
132225	115.2 to 134.8 feet	Key Note Segment		5 ft	98			
132209	125.3 to 126.3 feet	Vertical Change	.3"	5 ft	5	REF		
132219	136.8 to 137.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
132220	138.5 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132226	141.1 to 161.5 feet	Key Note Segment		5 ft	102			
132210	151.5 to 152.5 feet	Vertical Change	.28"	5 ft	5	REF		
132211	162.0 to 163.0 feet	Vertical Change	-.31"	5 ft	5	REF		
132221	163.9 to 167.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
132222	167.7 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
132212	182.0 to 183.0 feet	Vertical Change	1.09"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **MANZANA CT** *Starting at:* **CLINTON ST** **$53,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121032	MAPLE ST	2884 MAPLE ST	ST TROPEZ DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94496	0.3 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
94497	9.1 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
94498	13.8 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
94499	26.5 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
94500	38.9 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
94501	41.4 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
94502	45.3 to 51.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
94503	53.8 to 55.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
94504	58.3 to 59.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
94510	60.3 to 80.7 feet	Key Note Segment		5 ft	102			
94495	74.0 to 75.0 feet	**Vertical Change**	.57"	5 ft	5	REF		
94505	81.8 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
94506	87.6 to 88.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
94507	90.4 to 91.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
94511	93.2 to 119.7 feet	Key Note Segment		5 ft	133			
94508	121.3 to 123.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
94509	126.4 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: S *side of* **MAPLE ST** *Starting at:* **2884 MAPLE ST** **$32,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211301	MAPLE ST	300 SANTA BONITA ST	SANTA BONITA ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106037	1.6 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
106038	12.5 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
106034	23.9 to 24.9 feet	**Vertical Change**	3.29"	5 ft	5	REF		
106039	32.0 to 46.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
106040	47.1 to 55.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
106041	55.8 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
106042	65.8 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
106043	83.8 to 91.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
106035	84.8 to 85.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
106036	89.9 to 90.9 feet	**Vertical Change**	1.77"	5 ft	5	REF		
106044	91.6 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**

TOTAL COST FOR: S *side of* **MAPLE ST** *Starting at:* **300 SANTA BONITA ST** **$50,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120944	MAPLE ST	329 MAPLE ST	S DOUBLE TREE WAY	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93940	0.1 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
93935	1.7 to 2.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
93941	15.6 to 22.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
93942	22.5 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
93936	23.1 to 24.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		
93943	37.4 to 54.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
93944	54.4 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
93945	59.9 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
93951	63.9 to 84.7 feet	Key Note Segment		5 ft	104			
93937	74.0 to 75.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93946	88.1 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
93938	90.1 to 91.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
93952	91.5 to 112.8 feet	Key Note Segment		5 ft	107			
93947	114.3 to 130.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
93939	125.2 to 126.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
93948	130.3 to 132.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
93949	132.5 to 134.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
93950	135.3 to 142.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
93953	141.3 to 142.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **329 MAPLE ST** **$52,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211536	MAPLE ST	CYPRESS ST	PINE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106451	0.5 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106445	3.1 to 4.1 feet	**Vertical Change**	1.16"	5 ft	5	SF	$75	**$375**
106452	7.9 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
106453	11.2 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
106454	15.0 to 17.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
106455	19.5 to 21.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
106456	23.9 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
106446	27.9 to 28.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
106457	42.0 to 47.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
106458	48.3 to 52.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
106459	53.6 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106447	60.7 to 61.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
106460	66.7 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
106461	74.9 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
106462	108.7 to 111.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
106473	112.6 to 135.3 feet	Key Note Segment		5 ft	114			
106448	113.2 to 114.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
106449	132.8 to 133.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
106463	135.7 to 137.1 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	7	SF	$120	**$840**
106464	140.8 to 160.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
106465	161.9 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
106466	166.6 to 172.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
106467	174.6 to 176.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
106468	181.3 to 204.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,860**
106469	205.8 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
106450	210.3 to 211.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
106470	210.5 to 218.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
106471	218.9 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211536	MAPLE ST	CYPRESS ST	PINE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106472	225.1 to 229.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **CYPRESS ST** **$91,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121052	MAPLE ST	MAKENNA DR	S WOLFTRAP ST	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94699	1.0 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
94700	10.2 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
94701	26.4 to 30.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
94702	30.9 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
94711	33.4 to 34.8 feet		5.0-6.0%	5 ft	7			
94697	37.4 to 38.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
94703	48.3 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
94704	58.6 to 61.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
94705	63.8 to 66.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
94706	69.0 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
94707	78.5 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
94708	82.3 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
94709	90.8 to 108.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
94710	113.3 to 144.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	156	SF	$120	**$18,660**
94712	144.8 to 146.2 feet		5.0-6.0%	5 ft	7			
94698	146.1 to 147.1 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **MAKENNA DR** **$68,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121030	MAPLE ST	MAKENNA DR	2884 MAPLE ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94479	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
94473	7.9 to 8.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94480	8.5 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
94481	10.8 to 20.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
94492	21.5 to 42.6 feet	Key Note Segment		5 ft	106			
94474	22.0 to 23.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
94475	31.8 to 32.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
94482	43.1 to 46.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**
94493	50.8 to 71.9 feet	Key Note Segment		5 ft	106			
94483	74.5 to 75.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94484	79.1 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
94476	83.0 to 84.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
94485	85.7 to 91.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
94486	91.8 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
94477	100.9 to 101.9 feet	**Vertical Change**	2.14"	5 ft	5	REF		
94487	105.5 to 109.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
94488	110.2 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
94489	117.3 to 126.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
94490	128.5 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
94494	134.8 to 155.2 feet	Key Note Segment		5 ft	102			
94491	155.6 to 163.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**

TOTAL COST FOR: S *side of* **MAPLE ST** *Starting at:* **MAKENNA DR** **$38,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211539	MAPLE ST	PINE ST	311 MAPLE ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106478	4.4 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
106498	15.8 to 34.0 feet	Key Note Segment		5 ft	91			
106474	29.4 to 30.4 feet	**Vertical Change**	-3.68"	5 ft	5	REF		
106479	34.0 to 35.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$340**
106475	34.1 to 35.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
106480	38.1 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
106481	42.0 to 47.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
106482	49.8 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
106483	58.3 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
106484	68.7 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
106485	78.3 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
106486	90.2 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
106487	100.3 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
106488	120.7 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
106489	130.3 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
106490	136.3 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
106491	144.9 to 146.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
106492	146.6 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
106493	152.0 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
106494	162.8 to 168.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
106495	172.0 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
106496	186.3 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
106499	194.3 to 219.2 feet	Key Note Segment		5 ft	125			
106476	207.2 to 208.2 feet	**Vertical Change**	-.44"	5 ft	5	REF		
106497	223.2 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **MAPLE ST** *Starting at:* **PINE ST** **$48,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120947	MAPLE ST	S DOUBLE TREE WAY	MAKENNA DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93965	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
93966	6.7 to 10.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
93967	11.8 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
93968	17.3 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
93969	25.5 to 26.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
94009	26.8 to 47.3 feet	Key Note Segment		5 ft	103			
93954	36.4 to 37.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
93970	47.3 to 52.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$980**
94010	54.3 to 74.9 feet	Key Note Segment		5 ft	103			
93955	65.0 to 66.0 feet	**Vertical Change**	.43"	5 ft	5	REF		
93971	76.0 to 107.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,600**
93972	107.0 to 112.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
93973	116.1 to 131.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	77	SF	$120	**$9,240**
93956	121.6 to 122.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
93974	132.1 to 140.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,860**
93975	140.2 to 147.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
94011	148.8 to 169.6 feet	Key Note Segment		5 ft	104			
93957	159.0 to 160.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
93976	172.8 to 177.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
94012	177.5 to 198.2 feet	Key Note Segment		5 ft	104			
93977	198.5 to 199.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
93978	201.8 to 208.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
93979	213.0 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
93980	218.2 to 223.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
93981	223.2 to 224.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
93982	229.3 to 248.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
93983	251.1 to 254.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
93984	254.7 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120947	MAPLE ST	S DOUBLE TREE WAY	MAKENNA DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93985	267.3 to 272.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
94013	273.8 to 294.3 feet	Key Note Segment		5 ft	103			
93958	274.9 to 275.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
93986	295.3 to 302.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
94014	302.0 to 322.9 feet	Key Note Segment		5 ft	104			
93987	323.8 to 332.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,340**
93988	334.0 to 336.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
93959	334.7 to 335.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
93989	338.3 to 346.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
93990	348.4 to 349.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
93960	349.3 to 350.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
93991	349.8 to 354.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
93992	354.8 to 356.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
93993	356.0 to 359.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
93994	360.8 to 362.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
94015	362.7 to 387.3 feet	Key Note Segment		5 ft	123			
93961	379.6 to 380.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
93962	386.2 to 387.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
93995	388.2 to 391.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
93996	393.9 to 397.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
93997	397.3 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93998	403.8 to 414.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
93999	414.6 to 416.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
94000	423.1 to 427.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
94001	430.6 to 431.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
93963	430.7 to 431.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
94002	432.2 to 438.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
94003	439.7 to 445.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120947	MAPLE ST	S DOUBLE TREE WAY	MAKENNA DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93964	439.9 to 440.9 feet	Vertical Change	.62"	5 ft	5	REF		
94004	445.5 to 448.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
94005	450.2 to 475.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
94006	475.5 to 479.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
94007	479.3 to 497.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
94008	497.0 to 498.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **MAPLE ST** *Starting at:* **S DOUBLE TREE WAY** **$169,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120942	MAPLE ST	S WOLFTRAP ST	3017 MAPLE ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93926	0.0 to 4.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
93927	7.0 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
93928	18.3 to 24.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
93933	24.8 to 45.8 feet	Key Note Segment		5 ft	105			
93929	46.7 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
93930	52.2 to 56.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
93931	57.4 to 85.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	141	SF	$120	**$16,920**
93924	57.5 to 58.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
93934	85.6 to 105.3 feet	Key Note Segment		5 ft	99			
93925	95.3 to 96.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
93932	107.3 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **S WOLFTRAP ST** **$37,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191023	MAPLE ST	SANTA CLARA	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102759	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
102760	3.8 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
102761	9.2 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102762	13.0 to 17.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
102763	17.1 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
102764	32.8 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
102765	69.2 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
102775	77.3 to 96.9 feet	Key Note Segment		5 ft	98			
102766	96.9 to 98.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
102776	98.8 to 121.7 feet	Key Note Segment		5 ft	115			
102767	122.5 to 124.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
102768	124.0 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
102769	141.7 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
102757	164.6 to 165.6 feet	**Vertical Change**	3.53"	5 ft	5	REF		
102770	174.4 to 181.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
102771	184.1 to 187.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
102772	197.5 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
102773	203.4 to 207.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
102774	207.7 to 230.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
102758	215.8 to 216.8 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **SANTA CLARA** **$68,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121038	MAPLE ST	ST TROPEZ DR	MAKENNA DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94558	0.8 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
94554	15.6 to 16.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
94559	19.3 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94578	24.9 to 46.7 feet	Key Note Segment		5 ft	109			
94560	47.2 to 54.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	37	SF	$40	**$1,480**
94579	54.7 to 75.2 feet	Key Note Segment		5 ft	103			
94561	77.9 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
94562	82.4 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
94563	91.3 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
94564	97.9 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
94565	103.7 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94555	109.7 to 110.7 feet	**Vertical Change**	-.48"	5 ft	5	REF		
94566	110.2 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
94567	121.8 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
94568	124.2 to 129.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
94569	129.2 to 140.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
94570	143.1 to 146.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
94580	146.3 to 165.9 feet	Key Note Segment		5 ft	98			
94556	147.1 to 148.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
94571	166.8 to 174.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
94581	174.8 to 195.4 feet	Key Note Segment		5 ft	103			
94572	196.3 to 210.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
94573	216.1 to 224.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
94574	225.3 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
94582	236.2 to 256.6 feet	Key Note Segment		5 ft	102			
94557	241.0 to 242.0 feet	**Vertical Change**	1"	5 ft	5	REF		
94575	257.0 to 258.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	9	SF	$40	**$360**
94576	260.0 to 270.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121038	MAPLE ST	ST TROPEZ DR	MAKENNA DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94577	271.2 to 282.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$7,020**
94583	280.3 to 282.9 feet		5.0-6.0%	5 ft	13			
94584	280.3 to 282.9 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **MAPLE ST** *Starting at:* **ST TROPEZ DR** **$77,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121018	MAPLE STREET	BERRY DRIVE	TOSCHI DRIVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94309	15.0 to 23.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
94310	26.1 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
94311	28.4 to 32.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
94301	32.5 to 33.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94312	33.8 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94313	38.3 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
94314	40.7 to 45.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
94328	45.7 to 70.6 feet	Key Note Segment		5 ft	124			
94302	56.1 to 57.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
94315	76.6 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
94316	87.3 to 102.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
94317	102.5 to 103.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
94329	106.7 to 126.5 feet	Key Note Segment		5 ft	99			
94304	107.4 to 108.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
94305	112.4 to 113.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94318	128.9 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
94330	134.1 to 154.0 feet	Key Note Segment		5 ft	100			
94319	162.9 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
94320	170.1 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
94321	183.0 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
94333	187.1 to 188.3 feet		5.0-6.0%	5 ft	6			
94322	197.0 to 209.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
94323	212.5 to 218.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
94324	220.4 to 223.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
94331	223.9 to 243.6 feet	Key Note Segment		5 ft	99			
94325	244.5 to 245.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
94326	248.9 to 250.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94332	250.1 to 270.3 feet	Key Note Segment		5 ft	101			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121018	MAPLE STREET	BERRY DRIVE	TOSCHI DRIVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94306	261.0 to 262.0 feet	Vertical Change	.34"	5 ft	5	REF		
94327	278.4 to 279.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
94307	283.6 to 284.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
94308	295.7 to 296.7 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **MAPLE STREET** *Starting at:* **BERRY DRIVE** **$60,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121006	MAPLE STREET	TOSCHI DRIVE	BERRY DRIVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94220	33.3 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
94221	37.0 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
94237	47.8 to 72.5 feet	Key Note Segment		5 ft	124			
94209	48.9 to 49.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
94210	61.5 to 62.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
94222	73.5 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
94223	74.9 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
94211	83.9 to 84.9 feet	**Vertical Change**	-.42"	5 ft	5	REF		
94224	93.4 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
94225	97.5 to 108.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
94238	108.3 to 127.9 feet	Key Note Segment		5 ft	98			
94212	127.8 to 128.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
94226	129.6 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
94239	136.5 to 155.8 feet	Key Note Segment		5 ft	97			
94213	155.4 to 156.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
94227	158.7 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
94214	162.7 to 163.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
94228	168.8 to 175.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
94215	174.0 to 175.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
94229	177.1 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
94230	184.2 to 204.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
94216	186.6 to 187.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
94231	204.8 to 208.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
94232	208.4 to 217.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
94233	220.2 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94240	222.4 to 242.5 feet	Key Note Segment		5 ft	101			
94217	231.6 to 232.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
94234	243.3 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121006	MAPLE STREET	TOSCHI DRIVE	BERRY DRIVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94241	250.2 to 269.6 feet	Key Note Segment		5 ft	97			
94218	251.3 to 252.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
94235	271.0 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
94236	276.4 to 291.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
94219	291.9 to 292.9 feet	**Vertical Change**	.57"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MAPLE STREET** *Starting at:* **TOSCHI DRIVE** **$67,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2109150840	MARIE DR	2611 MARIE DR	GLADE AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66697	3.0 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
66722	5.5 to 36.2 feet	Key Note Segment		5 ft	154			
66688	8.4 to 9.4 feet	**Vertical Change**	1.92"	5 ft	5	REF		
66698	41.7 to 43.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
66699	43.3 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66700	55.2 to 58.6 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	17	SF	$120	**$2,040**
66689	56.5 to 57.5 feet	**Vertical Change**	1.05"	5 ft	5	REF		
66701	59.2 to 60.4 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	6	SF	$120	**$720**
66702	65.0 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
66703	71.3 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
66723	76.9 to 105.4 feet	Key Note Segment		5 ft	142			
66704	107.0 to 117.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
66705	117.0 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
66706	123.3 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
66707	143.7 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
66691	147.9 to 148.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
66708	149.0 to 150.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66709	153.8 to 203.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	246	SF	$120	**$29,580**
66710	204.2 to 208.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
66724	211.8 to 241.8 feet	Key Note Segment		5 ft	150			
66692	223.2 to 224.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
66693	225.4 to 226.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
66711	243.0 to 246.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
66712	246.4 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
66713	255.2 to 263.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
66714	266.9 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
66715	275.8 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,060**
66725	301.0 to 329.1 feet	Key Note Segment		5 ft	141			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2109150840	MARIE DR	2611 MARIE DR	GLADE AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66694	302.4 to 306.1 feet	Vertical Change	.33"	5 ft	19	REF		
66695	321.9 to 322.9 feet	Vertical Change	-.46"	5 ft	5	REF		
66716	331.9 to 345.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
66696	342.2 to 343.2 feet	Vertical Change	-.38"	5 ft	5	REF		
66717	347.5 to 355.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
66718	358.3 to 384.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,780**
66719	387.6 to 390.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
66720	390.3 to 394.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
66721	396.5 to 411.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**

TOTAL COST FOR: NW *side of* **MARIE DR** *Starting at:* **2611 MARIE DR** **$132,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150914	MARIE DR	GLADE AVE	KIMBERLEY LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67097	12.7 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
67098	22.8 to 33.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
67118	38.2 to 58.8 feet	Key Note Segment		5 ft	103			
67085	41.6 to 42.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
67099	59.3 to 88.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	148	SF	$40	**$5,900**
67100	88.8 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
67101	123.9 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
67102	130.3 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
67103	141.6 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
67119	152.0 to 181.5 feet	Key Note Segment		5 ft	148			
67086	161.0 to 162.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
67087	168.1 to 169.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
67104	183.3 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
67105	187.7 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67106	193.8 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
67107	214.1 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
67120	219.3 to 248.7 feet	Key Note Segment		5 ft	147			
67089	255.9 to 259.4 feet	**Vertical Change**	-.38"	5 ft	17	LF	$75	**$1,313**
67108	266.9 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
67090	271.5 to 272.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
67121	287.6 to 314.6 feet	Key Note Segment		5 ft	135			
67109	325.2 to 334.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
67110	346.6 to 347.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67122	355.1 to 381.3 feet	Key Note Segment		5 ft	131			
67092	366.0 to 367.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
67093	375.1 to 376.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
67111	381.3 to 382.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$240**
67112	384.8 to 386.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150914	MARIE DR	GLADE AVE	KIMBERLEY LN	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67113	386.7 to 388.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	7	SF	$120	**$780**
67094	390.4 to 391.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
67114	390.8 to 392.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67095	394.5 to 395.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
67123	394.5 to 420.7 feet	Key Note Segment		5 ft	131			
67096	411.3 to 412.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
67115	427.8 to 429.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
67116	435.6 to 439.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
67117	443.1 to 454.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**

TOTAL COST FOR: N *side of* **MARIE DR** *Starting at:* **GLADE AVE** **$76,047.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2109150941	MARIE DR	STEVEN LANE	TAYLOR LANE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67366	0.0 to 10.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
67367	13.3 to 23.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
67405	25.7 to 44.5 feet	Key Note Segment		5 ft	94			
67346	28.3 to 29.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
67347	42.2 to 43.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
67368	48.1 to 49.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
67406	50.6 to 70.0 feet	Key Note Segment		5 ft	97			
67348	71.0 to 72.0 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
67369	72.1 to 73.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
67370	74.3 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
67349	81.5 to 82.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
67371	96.6 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
67372	101.9 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
67407	112.0 to 132.8 feet	Key Note Segment		5 ft	104			
67350	114.9 to 115.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
67351	129.4 to 130.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
67373	133.1 to 144.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	56	SF	$40	**$2,240**
67374	144.9 to 171.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
67408	171.0 to 199.6 feet	Key Note Segment		5 ft	143			
67352	174.5 to 175.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
67353	190.9 to 191.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
67375	202.4 to 216.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
67376	219.1 to 232.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
67409	232.5 to 251.3 feet	Key Note Segment		5 ft	94			
67354	235.5 to 236.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
67355	249.4 to 250.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
67377	253.1 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67378	266.7 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2109150941	MARIE DR	STEVEN LANE	TAYLOR LANE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67356	272.0 to 273.0 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
67379	275.0 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
67380	286.3 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
67410	297.7 to 325.6 feet	Key Note Segment		5 ft	140			
67357	316.8 to 317.8 feet	Vertical Change	.32"	5 ft	5	REF		
67381	327.3 to 328.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
67382	330.3 to 343.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
67358	335.5 to 336.5 feet	Vertical Change	3.22"	5 ft	5	REF		
67383	345.9 to 353.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
67411	354.5 to 382.7 feet	Key Note Segment		5 ft	141			
67359	366.7 to 367.7 feet	Vertical Change	.26"	5 ft	5	REF		
67384	386.4 to 393.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
67412	395.8 to 413.7 feet	Key Note Segment		5 ft	90			
67360	399.0 to 400.0 feet	Vertical Change	.88"	5 ft	5	REF		
67385	416.2 to 417.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
67386	428.2 to 437.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
67361	437.9 to 438.9 feet	Vertical Change	.6"	5 ft	5	SF	$75	$375
67387	440.5 to 470.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	$18,240
67362	453.0 to 454.0 feet	Vertical Change	.27"	5 ft	5	REF		
67363	466.4 to 467.4 feet	Vertical Change	3.06"	5 ft	5	REF		
67388	473.9 to 478.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
67413	478.5 to 498.0 feet	Key Note Segment		5 ft	98			
67389	498.3 to 499.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
67390	500.3 to 502.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
67414	506.5 to 532.6 feet	Key Note Segment		5 ft	131			
67391	536.7 to 538.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
67392	540.1 to 544.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
67393	546.4 to 548.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,140

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2109150941	MARIE DR	STEVEN LANE	TAYLOR LANE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67394	550.1 to 553.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
67395	555.8 to 564.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
67415	564.7 to 584.6 feet	Key Note Segment		5 ft	99			
67396	584.7 to 585.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
67397	590.9 to 592.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
67398	592.1 to 605.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
67399	608.3 to 612.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
67400	614.3 to 618.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
67401	622.1 to 632.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
67416	641.2 to 668.4 feet	Key Note Segment		5 ft	136			
67364	658.6 to 659.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
67402	669.3 to 671.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
67403	673.6 to 681.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
67404	685.4 to 708.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
67417	705.7 to 708.6 feet		5.0-6.0%	5 ft	15			
67418	705.7 to 708.6 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: SE *side of* **MARIE DR** *Starting at:* **STEVEN LANE** **$181,965.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2109150837	MARIE DR	TAYLOR LANE	2611 MARIE DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66680	0.1 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66681	3.5 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
66682	14.8 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
66683	29.0 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
66684	48.0 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
66685	53.3 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
66686	63.2 to 78.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
66687	78.8 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: SE *side of* **MARIE DR** *Starting at:* **TAYLOR LANE** **$37,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171159	MARINA DR	ASILOMAR DR	SANTA LUCIA DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89271	0.8 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
89272	14.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89273	16.8 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
89288	24.3 to 44.9 feet	Key Note Segment		5 ft	103			
89274	45.8 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
89275	53.4 to 55.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
89263	54.5 to 55.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
89289	57.8 to 77.3 feet	Key Note Segment		5 ft	98			
89276	78.6 to 81.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
89277	84.5 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
89264	87.5 to 88.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
89265	95.3 to 96.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
89278	103.0 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89266	103.4 to 104.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
89279	104.9 to 106.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
89290	107.1 to 136.2 feet	Key Note Segment		5 ft	145			
89280	137.3 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
89281	143.3 to 147.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
89267	146.8 to 147.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
89282	147.8 to 171.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,100**
89268	152.9 to 153.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
89283	174.1 to 176.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
89291	177.4 to 207.7 feet	Key Note Segment		5 ft	152			
89284	210.9 to 219.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
89292	219.4 to 239.2 feet	Key Note Segment		5 ft	99			
89269	239.5 to 240.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
89285	239.8 to 240.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
89286	241.4 to 250.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171159	MARINA DR	ASILOMAR DR	SANTA LUCIA DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89287	254.1 to 262.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
89293	261.3 to 263.8 feet		5.0-6.0%	5 ft	13			
89294	261.3 to 263.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
89270	264.1 to 265.1 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **MARINA DR** *Starting at:* **ASILOMAR DR** **$64,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171202	MARINA DR	SANTA LUCIA DR	ASILOMAR DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89300	6.4 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
89301	15.9 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
89319	22.5 to 44.9 feet	Key Note Segment		5 ft	112			
89320	51.7 to 75.3 feet	Key Note Segment		5 ft	118			
89302	77.9 to 80.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
89303	80.5 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
89304	98.9 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
89295	102.2 to 103.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
89321	107.9 to 131.2 feet	Key Note Segment		5 ft	116			
89296	120.6 to 121.6 feet	**Vertical Change**	-.37"	5 ft	5	REF		
89305	131.2 to 132.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
89306	132.4 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89307	137.7 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
89308	145.3 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89309	148.8 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
89310	155.9 to 162.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
89311	162.5 to 164.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
89312	177.3 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
89313	182.9 to 190.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
89322	191.1 to 212.8 feet	Key Note Segment		5 ft	109			
89297	214.4 to 215.4 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
89314	217.3 to 219.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
89323	220.8 to 242.3 feet	Key Note Segment		5 ft	108			
89315	243.8 to 250.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
89298	245.9 to 246.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
89316	253.2 to 254.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
89317	258.1 to 263.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
89318	263.9 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171202	MARINA DR	SANTA LUCIA DR	ASILOMAR DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89299	266.8 to 267.8 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **MARINA DR** *Starting at:* **SANTA LUCIA DR** **$43,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108120955	MARIPOSA ST	1416 MARIPOSA ST	OSO DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59638	1.8 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
59657	17.5 to 36.3 feet	Key Note Segment		5 ft	94			
59629	26.6 to 27.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59630	28.8 to 29.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
59639	40.2 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
59658	44.8 to 63.6 feet	Key Note Segment		5 ft	94			
59640	63.6 to 65.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
59641	68.5 to 108.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$23,940**
59631	72.5 to 73.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
59659	108.4 to 126.4 feet	Key Note Segment		5 ft	90			
59660	135.1 to 153.9 feet	Key Note Segment		5 ft	94			
59642	155.1 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
59643	170.3 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
59644	190.7 to 199.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
59632	197.1 to 198.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59661	199.0 to 217.6 feet	Key Note Segment		5 ft	93			
59633	209.7 to 210.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
59645	218.3 to 225.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**
59662	225.3 to 243.8 feet	Key Note Segment		5 ft	93			
59634	235.2 to 236.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
59646	244.8 to 248.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
59647	249.8 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
59663	290.3 to 306.8 feet	Key Note Segment		5 ft	83			
59648	313.4 to 318.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
59664	318.0 to 337.7 feet	Key Note Segment		5 ft	99			
59649	342.6 to 380.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,560**
59635	354.4 to 355.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
59665	380.5 to 398.3 feet	Key Note Segment		5 ft	89			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108120955	MARIPOSA ST	1416 MARIPOSA ST	OSO DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59636	391.0 to 392.0 feet	Vertical Change	.37"	5 ft	5	REF		
59650	398.3 to 405.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	35	SF	$40	$1,400
59666	405.6 to 424.9 feet	Key Note Segment		5 ft	97			
59651	424.9 to 441.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	83	SF	$40	$3,320
59652	448.3 to 482.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	$20,400
59653	484.9 to 488.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
59654	491.1 to 502.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,660
59637	506.2 to 507.2 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
59655	510.0 to 517.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
59656	524.8 to 540.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,540

TOTAL COST FOR: W *side of* **MARIPOSA ST** *Starting at:* **1416 MARIPOSA ST** **$157,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121113	MARIPOSA ST	ARDILLA DR	OLIVE AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60359	0.0 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
60360	15.3 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
60361	32.4 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
60357	34.6 to 35.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
60362	40.0 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
60358	47.4 to 48.4 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MARIPOSA ST** *Starting at:* **ARDILLA DR** **$34,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108120949	MARIPOSA ST	DOME AVE	A ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59619	0.0 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
59617	4.8 to 5.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
59620	21.8 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
59621	35.3 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
59622	40.0 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
59623	77.2 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
59624	82.5 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
59625	106.1 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
59626	125.1 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
59627	131.0 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
59628	159.3 to 160.3 feet		5.0-6.0%	5 ft	5			
59618	159.6 to 160.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **MARIPOSA ST** *Starting at:* **DOME AVE** **$47,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121114	MARIPOSA ST	OLIVE AVE	ARDILLA DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60364	0.1 to 16.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
60365	16.9 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
60366	35.7 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
60367	42.3 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
60368	52.0 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
60369	58.9 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
60363	72.4 to 73.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **MARIPOSA ST** *Starting at:* **OLIVE AVE** **$23,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121028	MARIPOSA ST	OSO DR	DOME AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59963	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59978	1.3 to 20.2 feet	Key Note Segment		5 ft	95			
59964	21.8 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
59956	24.8 to 25.8 feet	Vertical Change	-.26"	5 ft	5	REF		
59965	44.5 to 56.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
59979	56.5 to 86.6 feet	Key Note Segment		5 ft	151			
59980	90.4 to 119.3 feet	Key Note Segment		5 ft	145			
59966	119.9 to 132.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
59967	132.4 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
59968	143.1 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
59981	159.8 to 188.8 feet	Key Note Segment		5 ft	145			
59957	188.4 to 189.4 feet	Vertical Change	.28"	5 ft	5	REF		
59969	189.2 to 190.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
59982	192.9 to 222.1 feet	Key Note Segment		5 ft	146			
59970	222.3 to 256.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	170	SF	$40	**$6,780**
59958	237.5 to 238.5 feet	Vertical Change	.35"	5 ft	5	REF		
59971	256.8 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
59983	263.5 to 291.8 feet	Key Note Segment		5 ft	142			
59959	263.9 to 264.9 feet	Vertical Change	.27"	5 ft	5	REF		
59972	291.9 to 296.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	24	SF	$40	**$960**
59984	296.7 to 325.7 feet	Key Note Segment		5 ft	145			
59960	325.5 to 326.5 feet	Vertical Change	-.37"	5 ft	5	REF		
59973	327.4 to 366.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	195	SF	$120	**$23,340**
59961	340.9 to 341.9 feet	Vertical Change	-.29"	5 ft	5	REF		
59985	366.3 to 395.3 feet	Key Note Segment		5 ft	145			
59974	399.3 to 401.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
59986	401.0 to 420.1 feet	Key Note Segment		5 ft	96			
59962	420.3 to 421.3 feet	Vertical Change	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121028	MARIPOSA ST	OSO DR	DOME AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59975	421.3 to 425.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
59976	425.5 to 427.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
59977	436.6 to 440.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **MARIPOSA ST** *Starting at:* **OSO DR** **$84,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271126	MATEO WAY	HILLSBORO AVE	MANDANA WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110792	0.0 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
110793	9.8 to 22.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
110805	22.2 to 57.4 feet	Key Note Segment		5 ft	176			
110780	31.7 to 32.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
110781	38.9 to 39.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110782	54.8 to 58.4 feet	**Vertical Change**	.27"	5 ft	18	REF		
110794	58.8 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
110795	72.3 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
110796	77.5 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
110797	91.9 to 99.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
110798	103.3 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
110806	104.7 to 134.4 feet	Key Note Segment		5 ft	149			
110784	133.9 to 134.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
110799	134.9 to 152.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
110807	155.3 to 185.8 feet	Key Note Segment		5 ft	152			
110785	155.4 to 156.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
110786	166.2 to 167.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
110787	185.9 to 186.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
110800	187.4 to 214.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
110788	207.6 to 208.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110801	217.3 to 223.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
110802	224.0 to 231.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
110808	231.4 to 257.0 feet	Key Note Segment		5 ft	128			
110803	260.6 to 262.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
110804	262.2 to 297.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,880**
110791	272.2 to 273.2 feet	**Vertical Change**	.48"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MATEO WAY** *Starting at:* **HILLSBORO AVE** **$91,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271119	MATEO WAY	MANDANA WAY	HILLSBORO AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110740	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
110741	7.4 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
110729	11.8 to 12.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
110759	11.8 to 34.8 feet	Key Note Segment		5 ft	115			
110730	14.0 to 15.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110742	43.0 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
110743	51.0 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
110744	60.7 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
110760	63.1 to 93.2 feet	Key Note Segment		5 ft	151			
110731	63.9 to 64.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
110745	95.0 to 103.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
110733	96.1 to 97.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
110746	103.3 to 106.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
110761	106.8 to 135.4 feet	Key Note Segment		5 ft	143			
110747	136.2 to 145.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
110748	147.5 to 188.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	207	SF	$120	**$24,780**
110734	148.1 to 149.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
110749	189.6 to 201.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
110750	204.3 to 205.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
110762	206.2 to 232.2 feet	Key Note Segment		5 ft	130			
110735	224.3 to 225.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
110751	235.3 to 239.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
110752	239.5 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
110763	244.9 to 279.7 feet	Key Note Segment		5 ft	174			
110736	257.5 to 258.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
110753	281.1 to 282.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
110754	283.1 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
110755	294.8 to 296.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271119	MATEO WAY	MANDANA WAY	HILLSBORO AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110756	297.6 to 323.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
110764	325.0 to 353.8 feet	Key Note Segment		5 ft	144			
110737	344.4 to 345.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
110757	355.6 to 375.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
110738	358.5 to 359.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
110758	375.9 to 385.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
110739	385.0 to 386.0 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MATEO WAY** *Starting at:* **MANDANA WAY** **$104,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141120	MEADOWREST WAY	ASPEN LN	SUNDANCE LN	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65663	2.3 to 3.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
65664	5.7 to 8.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
65665	8.0 to 9.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
65666	10.3 to 18.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
65667	20.4 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
65668	22.0 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
65707	24.9 to 48.8 feet	Key Note Segment		5 ft	120			
65669	49.5 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
65670	67.5 to 72.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
65671	76.3 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
65708	78.3 to 103.3 feet	Key Note Segment		5 ft	125			
65672	109.0 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
65709	111.5 to 135.7 feet	Key Note Segment		5 ft	121			
65644	136.8 to 137.8 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
65673	145.6 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
65645	162.9 to 163.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
65710	165.3 to 189.8 feet	Key Note Segment		5 ft	123			
65646	169.4 to 170.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
65647	190.1 to 191.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
65674	190.4 to 202.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	59	SF	$40	**$2,360**
65648	214.6 to 215.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
65675	219.7 to 238.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
65711	238.6 to 262.3 feet	Key Note Segment		5 ft	119			
65676	262.8 to 269.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
65677	272.5 to 281.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
65678	284.2 to 287.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
65649	286.1 to 287.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
65679	288.3 to 291.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141120	MEADOWREST WAY	ASPEN LN	SUNDANCE LN	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65712	291.7 to 316.0 feet	Key Note Segment		5 ft	122			
65650	292.7 to 293.7 feet	Vertical Change	-.27"	5 ft	5	REF		
65651	310.4 to 311.4 feet	Vertical Change	.64"	5 ft	5	REF		
65680	316.0 to 324.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	42	SF	$40	**$1,680**
65681	324.4 to 328.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
65682	331.0 to 343.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
65713	343.8 to 368.3 feet	Key Note Segment		5 ft	123			
65683	368.6 to 372.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
65652	374.2 to 375.2 feet	Vertical Change	.61"	5 ft	5	SF	$75	**$375**
65714	377.8 to 401.2 feet	Key Note Segment		5 ft	117			
65684	402.4 to 403.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
65685	404.8 to 406.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
65686	418.8 to 429.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
65687	433.3 to 449.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
65653	448.1 to 449.1 feet	Vertical Change	.3"	5 ft	5	REF		
65715	450.3 to 473.3 feet	Key Note Segment		5 ft	115			
65688	473.3 to 482.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	47	SF	$40	**$1,880**
65724	474.6 to 475.9 feet		5.0-6.0%	5 ft	7			
65716	484.3 to 506.6 feet	Key Note Segment		5 ft	112			
65689	508.1 to 530.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
65654	529.3 to 530.3 feet	Vertical Change	.26"	5 ft	5	REF		
65690	533.3 to 557.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
65717	558.5 to 580.4 feet	Key Note Segment		5 ft	110			
65691	581.9 to 589.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
65655	582.9 to 583.9 feet	Vertical Change	.32"	5 ft	5	REF		
65718	589.8 to 612.7 feet	Key Note Segment		5 ft	115			
65656	615.1 to 616.1 feet	Vertical Change	.27"	5 ft	5	REF		
65692	615.2 to 618.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141120	MEADOWREST WAY	ASPEN LN	SUNDANCE LN	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65693	621.8 to 645.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
65657	631.0 to 632.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
65694	646.0 to 647.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
65719	653.5 to 666.3 feet	Key Note Segment		5 ft	64			
65695	666.3 to 680.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	71	SF	$40	**$2,840**
65696	681.4 to 695.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
65720	695.8 to 719.5 feet	Key Note Segment		5 ft	119			
65697	719.5 to 720.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
65721	745.3 to 764.8 feet	Key Note Segment		5 ft	98			
65658	751.1 to 752.1 feet	**Vertical Change**	.69"	5 ft	5	REF		
65698	765.5 to 775.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
65659	773.8 to 774.8 feet	**Vertical Change**	-.53"	5 ft	5	REF		
65699	775.1 to 779.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
65700	779.4 to 801.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
65660	799.5 to 800.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
65701	801.3 to 802.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
65722	802.8 to 826.1 feet	Key Note Segment		5 ft	117			
65702	826.3 to 833.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,500**
65703	836.2 to 839.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
65661	841.9 to 842.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
65662	852.1 to 853.1 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
65704	853.3 to 854.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
65723	856.0 to 878.0 feet	Key Note Segment		5 ft	110			
65705	878.0 to 883.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
65706	897.4 to 908.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**

TOTAL COST FOR: N *side of* **MEADOWREST WAY** *Starting at:* **ASPEN LN** **$177,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141115	MEADOWREST WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65573	0.0 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
65574	6.5 to 15.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
65627	16.3 to 39.7 feet	Key Note Segment		5 ft	117			
65560	17.7 to 18.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
65575	42.8 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
65576	47.6 to 50.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
65628	50.1 to 73.5 feet	Key Note Segment		5 ft	117			
65561	74.5 to 75.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
65577	80.1 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
65562	100.2 to 101.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
65578	100.6 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65629	103.7 to 120.3 feet	Key Note Segment		5 ft	83			
65579	120.7 to 121.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
65563	121.0 to 122.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
65580	125.3 to 127.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
65581	127.9 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
65582	134.8 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
65630	156.8 to 177.5 feet	Key Note Segment		5 ft	103			
65583	177.5 to 183.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
65564	178.0 to 179.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
65584	186.0 to 194.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
65565	195.4 to 196.4 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$375**
65566	206.4 to 207.4 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
65585	210.0 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
65567	214.0 to 215.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
65586	216.3 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
65568	220.5 to 221.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
65587	222.8 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141115	MEADOWREST WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65631	231.1 to 254.6 feet	Key Note Segment		5 ft	118			
65588	254.6 to 258.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	$840
65589	260.6 to 262.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
65632	263.5 to 287.5 feet	Key Note Segment		5 ft	120			
65590	287.5 to 294.1 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	33	SF	$40	$1,320
65591	294.8 to 302.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
65592	302.5 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
65593	312.9 to 337.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	$14,940
65633	338.3 to 360.6 feet	Key Note Segment		5 ft	112			
65594	362.3 to 366.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
65569	366.0 to 367.0 feet	Vertical Change	-.31"	5 ft	5	REF		
65595	366.8 to 368.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
65634	369.1 to 394.2 feet	Key Note Segment		5 ft	126			
65596	397.0 to 408.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,960
65597	412.5 to 415.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
65598	418.8 to 428.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
65599	428.8 to 429.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
65635	444.9 to 469.4 feet	Key Note Segment		5 ft	123			
65600	469.4 to 474.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	26	SF	$40	$1,020
65570	472.4 to 473.4 feet	Vertical Change	.27"	5 ft	5	REF		
65636	474.5 to 499.6 feet	Key Note Segment		5 ft	126			
65571	500.6 to 501.6 feet	Vertical Change	.44"	5 ft	5	REF		
65601	501.3 to 505.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
65602	505.8 to 524.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	$11,160
65603	527.1 to 528.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
65637	529.1 to 552.3 feet	Key Note Segment		5 ft	116			
65604	553.2 to 561.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,220
65605	563.8 to 574.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,660

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141115	MEADOWREST WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65572	578.6 to 579.6 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
65606	579.8 to 581.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
65638	582.5 to 606.1 feet	Key Note Segment		5 ft	118			
65607	607.8 to 620.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380
65608	620.9 to 623.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
65609	626.6 to 632.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,240
65610	633.8 to 634.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
65639	635.4 to 659.1 feet	Key Note Segment		5 ft	119			
65611	659.4 to 671.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	63	SF	$40	$2,500
65612	675.8 to 681.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
65613	684.4 to 688.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,280
65614	688.2 to 689.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
65615	691.4 to 692.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
65616	694.4 to 708.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,340
65640	708.3 to 732.8 feet	Key Note Segment		5 ft	123			
65617	734.8 to 736.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
65618	741.9 to 749.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
65619	752.2 to 753.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
65620	754.7 to 761.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
65641	763.0 to 784.8 feet	Key Note Segment		5 ft	109			
65621	789.6 to 795.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
65642	795.5 to 818.3 feet	Key Note Segment		5 ft	114			
65622	821.4 to 840.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	$11,640
65623	841.6 to 845.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
65624	845.8 to 847.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
65625	850.6 to 853.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
65643	865.1 to 886.3 feet	Key Note Segment		5 ft	106			
65626	895.5 to 901.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141115	MEADOWREST WAY	SUNDANCE LN	ASPEN LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **MEADOWREST WAY**	*Starting at:* **SUNDANCE LN**					**$188,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071034	MERCED ST	1081 E ADELL ST	E ADELL ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122382	0.0 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
122383	6.1 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
122381	37.5 to 38.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
122384	55.1 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
122385	58.8 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
122386	64.6 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
122387	86.2 to 106.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **1081 E ADELL ST** **$41,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071032	MERCED ST	1832 MERCED ST	1832 MERCED ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122365	0.6 to 1.6 feet	Vertical Change	.32"	5 ft	5	REF		
122368	1.3 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,340**
122366	4.5 to 7.7 feet	Vertical Change	.31"	5 ft	16	REF		
122369	40.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
122370	54.9 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
122371	82.3 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
122372	90.9 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
122373	111.2 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
122379	130.6 to 131.7 feet		5.0-6.0%	5 ft	5			
122378	133.3 to 146.5 feet	Key Note Segment		5 ft	66			
122374	146.5 to 148.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	**$480**
122367	150.1 to 151.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
122375	152.6 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
122376	173.3 to 180.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
122377	183.6 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
122380	185.3 to 186.8 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **1832 MERCED ST** **$69,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071030	MERCED ST	1848 MERCED ST	1832 MERCED ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122347	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
122348	4.7 to 9.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,060
122363	10.6 to 35.0 feet	Key Note Segment		5 ft	122			
122340	23.4 to 24.4 feet	Vertical Change	-.29"	5 ft	5	REF		
122341	34.5 to 35.5 feet	Vertical Change	.44"	5 ft	5	REF		
122349	35.1 to 45.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	52	SF	$40	$2,060
122350	45.4 to 52.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,260
122351	55.0 to 56.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
122364	57.9 to 71.9 feet	Key Note Segment		5 ft	70			
122352	74.3 to 81.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,080
122342	76.6 to 77.6 feet	Vertical Change	1.69"	5 ft	5	REF		
122343	80.8 to 81.8 feet	Vertical Change	.26"	5 ft	5	REF		
122353	81.7 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
122354	88.8 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
122355	92.4 to 94.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
122356	95.7 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
122344	101.7 to 102.7 feet	Vertical Change	1.42"	5 ft	5	SF	$75	$375
122357	107.8 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
122358	117.4 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
122359	126.3 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
122345	130.1 to 131.1 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
122360	133.0 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
122361	146.6 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
122346	156.0 to 157.0 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
122362	159.1 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **1848 MERCED ST** **$47,105.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071218	MERCED ST	CARMEN AVE	E ELLIS ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123181	1.3 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
123182	9.4 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
123183	29.8 to 31.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
123184	33.8 to 35.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
123185	35.5 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
123186	50.7 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
123178	69.7 to 70.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
123187	70.5 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
123188	107.3 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
123189	120.8 to 123.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
123190	127.2 to 144.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
123191	144.2 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
123192	157.5 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
123193	163.8 to 187.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,460**
123194	201.1 to 206.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
123195	207.3 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
123196	216.8 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
123197	232.9 to 236.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
123179	233.6 to 234.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
123198	237.0 to 251.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
123199	255.9 to 270.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
123180	259.3 to 260.3 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
123200	274.1 to 277.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
123201	280.1 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
123202	283.6 to 294.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,420**

TOTAL COST FOR: E *side of* **MERCED ST** *Starting at:* **CARMEN AVE** **$112,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071209	MERCED ST	CONSTRUCTION	LACRETA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123121	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
123122	6.0 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
123123	8.8 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
123124	17.5 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
123125	24.8 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
123119	24.9 to 25.9 feet	**Vertical Change**	-.66"	5 ft	5	REF		
123126	30.2 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
123127	33.7 to 45.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,780**
123120	41.5 to 42.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
123128	46.0 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
123143	58.0 to 75.8 feet	Key Note Segment		5 ft	89			
123129	79.5 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
123130	88.3 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
123144	111.9 to 129.3 feet	Key Note Segment		5 ft	87			
123131	130.0 to 161.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	156	SF	$120	**$18,720**
123132	162.2 to 164.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
123145	165.7 to 182.7 feet	Key Note Segment		5 ft	85			
123133	186.5 to 189.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
123134	189.8 to 193.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
123135	193.4 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
123136	201.6 to 207.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
123137	207.8 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
123138	215.6 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
123139	235.8 to 254.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
123140	256.9 to 258.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
123141	261.9 to 269.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
123142	271.5 to 275.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: E *side of* **MERCED ST** *Starting at:* **CONSTRUCTION** **$108,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071052	MERCED ST	E ADELL ST	E KENNEDY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122567	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
122568	3.3 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	98	SF	$120	**$11,712**
122563	17.9 to 18.9 feet	**Vertical Change**	.26"	4 ft	4	REF		
122569	34.0 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
122570	40.6 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
122571	46.9 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
122572	53.8 to 55.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$624**
122573	57.0 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
122588	60.1 to 76.8 feet	Key Note Segment		4 ft	67			
122574	79.8 to 85.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
122592	86.5 to 87.5 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
122575	102.3 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,512**
122589	112.9 to 136.4 feet	Key Note Segment		4 ft	94			
122576	136.5 to 139.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	11	SF	$40	**$448**
122564	137.3 to 138.3 feet	**Vertical Change**	.37"	4 ft	4	REF		
122577	144.3 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	26	SF	$120	**$3,120**
122578	150.8 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
122590	162.0 to 185.2 feet	Key Note Segment		4 ft	93			
122565	168.4 to 169.4 feet	**Vertical Change**	3.17"	4 ft	4	REF		
122579	185.2 to 188.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	12	SF	$40	**$496**
122580	191.9 to 208.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,016**
122581	210.1 to 220.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	43	SF	$120	**$5,136**
122582	220.8 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
122591	227.8 to 251.8 feet	Key Note Segment		4 ft	96			
122583	251.8 to 254.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	10	SF	$40	**$384**
122584	254.9 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	68	SF	$120	**$8,112**
122566	277.6 to 278.6 feet	**Vertical Change**	-.28"	4 ft	4	REF		
122585	277.7 to 279.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071052	MERCED ST	E ADELL ST	E KENNEDY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122586	283.3 to 284.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
122587	288.7 to 299.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	42	SF	$120	**$5,088**

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **E ADELL ST** **$63,059.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071024	MERCED ST	E ELLIS ST	HAWK LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122318	4.5 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
122319	16.9 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
122332	30.8 to 45.0 feet	Key Note Segment		5 ft	71			
122320	49.9 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
122321	62.0 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
122317	65.2 to 66.2 feet	**Vertical Change**	1.2"	5 ft	5	REF		
122322	80.6 to 88.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
122323	93.0 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
122324	106.1 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
122325	119.8 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
122326	154.3 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
122327	160.2 to 161.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
122328	168.5 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
122329	178.7 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
122330	200.1 to 217.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
122331	221.8 to 228.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **E ELLIS ST** **$56,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071205	MERCED ST	E KENNEDY ST	CONSTRUCTION	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123099	0.0 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
123100	4.2 to 36.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,620**
123101	37.3 to 38.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
123102	38.8 to 55.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	85	SF	$120	**$10,140**
123103	57.1 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,220**
123104	78.3 to 113.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	175	SF	$120	**$21,000**
123093	85.5 to 86.5 feet	**Vertical Change**	1.47"	5 ft	5	REF		
123094	102.6 to 103.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
123105	113.3 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
123106	116.9 to 118.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
123115	118.4 to 136.2 feet	Key Note Segment		5 ft	89			
123095	119.2 to 120.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
123096	136.6 to 137.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
123107	138.7 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
123108	153.4 to 167.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
123109	167.5 to 170.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
123116	171.8 to 190.1 feet	Key Note Segment		5 ft	92			
123110	194.4 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
123111	207.0 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
123112	209.8 to 225.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
123097	221.6 to 222.6 feet	**Vertical Change**	-.69"	5 ft	5	REF		
123117	225.6 to 242.9 feet	Key Note Segment		5 ft	87			
123113	244.9 to 278.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
123118	279.2 to 296.6 feet	Key Note Segment		5 ft	87			
123098	297.1 to 298.1 feet	**Vertical Change**	1.04"	5 ft	5	REF		
123114	323.8 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: E *side of* **MERCED ST** *Starting at:* **E KENNEDY ST** **$124,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202101118	MERCED ST	E RIVERSIDE DR	1100 MERCED ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131251	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
131252	5.8 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
131245	6.6 to 7.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
131246	16.8 to 17.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
131253	17.0 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
131256	22.9 to 43.0 feet	Key Note Segment		5 ft	101			
131247	40.7 to 41.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
131248	42.7 to 43.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
131254	56.9 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
131249	66.5 to 67.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
131257	66.6 to 85.1 feet	Key Note Segment		5 ft	93			
131255	88.0 to 89.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
131258	92.3 to 117.9 feet	Key Note Segment		5 ft	128			
131250	118.1 to 119.1 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MERCED ST** *Starting at:* **E RIVERSIDE DR** **$6,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202101119	MERCED ST	E RIVERSIDE DR	784 MERCED ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131262	5.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
131265	15.2 to 35.1 feet	Key Note Segment		5 ft	100			
131259	15.3 to 16.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
131263	36.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
131260	39.6 to 40.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
131266	44.4 to 62.7 feet	Key Note Segment		5 ft	92			
131261	68.0 to 69.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
131264	74.7 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
131267	82.4 to 84.9 feet		5.0-6.0%	5 ft	13			
131268	82.4 to 84.9 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **E RIVERSIDE DR** **$11,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071428	MERCED ST	GREEN WAY	E CLEVELAND AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43979	6.1 to 7.1 feet	Vertical Change	.3"	4 ft	4	LF	$75	$300
43988	14.7 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$912
44011	16.6 to 30.8 feet	Key Note Segment		4 ft	57			
43989	30.8 to 51.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	84	SF	$40	$3,360
43990	52.8 to 68.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	$7,632
43991	68.7 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,688
44012	74.3 to 88.7 feet	Key Note Segment		4 ft	58			
43980	75.8 to 76.8 feet	Vertical Change	.66"	4 ft	4	REF		
43992	90.3 to 100.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	39	SF	$120	$4,656
43993	100.6 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,968
43994	105.0 to 116.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	$5,424
43995	117.9 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	$4,272
44013	126.8 to 141.5 feet	Key Note Segment		4 ft	59			
43981	139.2 to 140.2 feet	Vertical Change	-.3"	4 ft	4	REF		
43996	141.5 to 147.2 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	23	SF	$40	$912
43997	151.2 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	$2,016
43998	158.0 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	$1,344
43999	162.0 to 169.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,456
44000	178.2 to 179.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$480
44014	181.7 to 194.3 feet	Key Note Segment		4 ft	50			
43982	200.9 to 201.9 feet	Vertical Change	.69"	4 ft	4	REF		
44001	200.9 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
43983	210.8 to 211.8 feet	Vertical Change	.26"	4 ft	4	LF	$75	$300
43984	224.0 to 225.0 feet	Vertical Change	.58"	4 ft	4	SF	$75	$300
44002	231.6 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	$1,536
44015	234.8 to 248.1 feet	Key Note Segment		4 ft	53			
43985	235.5 to 236.5 feet	Vertical Change	-.6"	4 ft	4	REF		
43986	249.3 to 250.3 feet	Vertical Change	.6"	4 ft	4	SF	$75	$300

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071428	MERCED ST	GREEN WAY	E CLEVELAND AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44003	255.2 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,608**
44004	267.1 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
44005	279.7 to 288.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,128**
44016	288.3 to 302.8 feet	Key Note Segment		4 ft	58			
44006	307.2 to 308.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
44007	311.3 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
44017	322.8 to 336.8 feet	Key Note Segment		4 ft	56			
44008	337.5 to 339.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
43987	338.5 to 339.5 feet	**Vertical Change**	.47"	4 ft	4	REF		
44009	341.4 to 343.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
44010	346.1 to 353.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,600**
44018	351.3 to 353.1 feet		5.0-6.0%	4 ft	7			

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **GREEN WAY** **$69,552.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071027	MERCED ST	HAWK LN	1901 MERCED ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122336	13.8 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
122333	16.0 to 17.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
122337	30.0 to 75.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	225	SF	$120	**$27,000**
122338	81.5 to 111.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
122334	93.4 to 94.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
122339	111.8 to 115.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
122335	114.9 to 115.9 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **HAWK LN** **$53,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071214	MERCED ST	LACRETA AVE	CARMEN AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123152	0.3 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
123153	4.8 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
123154	26.4 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
123155	44.7 to 50.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
123156	50.3 to 87.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	188	SF	$120	**$22,560**
123157	88.1 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
123158	90.1 to 94.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
123159	98.2 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
123160	100.9 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
123161	107.6 to 132.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
123162	133.0 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
123146	140.9 to 141.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
123163	140.9 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
123164	148.3 to 179.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,660**
123165	183.3 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
123147	184.2 to 185.2 feet	**Vertical Change**	1"	5 ft	5	REF		
123148	198.1 to 199.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
123149	200.2 to 201.2 feet	**Vertical Change**	.55"	5 ft	5	REF		
123150	202.5 to 203.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
123166	210.1 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
123151	211.8 to 212.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
123167	231.0 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
123168	276.3 to 282.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
123169	285.4 to 298.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
123170	308.6 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
123171	315.1 to 321.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
123172	324.0 to 341.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
123173	343.3 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071214	MERCED ST	LACRETA AVE	CARMEN AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123174	365.1 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
123175	368.8 to 375.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
123176	378.5 to 385.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
123177	388.1 to 394.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**

TOTAL COST FOR: E *side of* **MERCED ST** *Starting at:* **LACRETA AVE** **$197,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071416	MERCED ST	W SHERWOOD WAY	GREEN WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43884	0.0 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	69	SF	$120	**$8,256**
43903	17.2 to 31.1 feet	Key Note Segment		4 ft	56			
43885	31.8 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,672**
43871	38.1 to 39.1 feet	**Vertical Change**	-.39"	4 ft	4	REF		
43872	46.9 to 47.9 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
43886	48.3 to 51.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
43887	52.3 to 74.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,512**
43873	56.4 to 57.4 feet	**Vertical Change**	.46"	4 ft	4	REF		
43874	60.9 to 61.9 feet	**Vertical Change**	.28"	4 ft	4	REF		
43904	74.2 to 87.7 feet	Key Note Segment		4 ft	54			
43888	87.7 to 89.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$304**
43889	94.8 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	113	SF	$120	**$13,536**
43890	123.0 to 128.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
43905	128.8 to 141.8 feet	Key Note Segment		4 ft	52			
43875	131.1 to 132.1 feet	**Vertical Change**	.31"	4 ft	4	REF		
43891	141.8 to 143.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	7	SF	$40	**$288**
43892	147.5 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	134	SF	$120	**$16,032**
43906	182.4 to 198.6 feet	Key Note Segment		4 ft	65			
43893	198.6 to 199.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	4	SF	$40	**$176**
43876	208.6 to 209.6 feet	**Vertical Change**	3.22"	4 ft	4	REF		
43894	208.6 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
43877	211.0 to 212.0 feet	**Vertical Change**	3.55"	4 ft	4	SF	$75	**$300**
43895	213.7 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
43878	215.9 to 216.9 feet	**Vertical Change**	.91"	4 ft	4	REF		
43896	216.3 to 220.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
43879	218.2 to 219.2 feet	**Vertical Change**	3.33"	4 ft	4	REF		
43897	220.3 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
43880	227.3 to 228.3 feet	**Vertical Change**	2.45"	4 ft	4	SF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071416	MERCED ST	W SHERWOOD WAY	GREEN WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43881	232.0 to 233.0 feet	Vertical Change	.3"	4 ft	4	LF	$75	**$300**
43907	236.4 to 249.5 feet	Key Note Segment		4 ft	52			
43882	239.4 to 240.4 feet	Vertical Change	.71"	4 ft	4	REF		
43898	249.5 to 270.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	85	SF	$40	**$3,408**
43883	253.9 to 254.9 feet	Vertical Change	3.35"	4 ft	4	REF		
43899	272.3 to 285.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	51	SF	$120	**$6,144**
43900	285.5 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
43908	289.4 to 303.0 feet	Key Note Segment		4 ft	54			
43901	317.2 to 322.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
43909	323.6 to 336.4 feet	Key Note Segment		4 ft	51			
43902	338.0 to 350.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**

TOTAL COST FOR: W *side of* **MERCED ST** *Starting at:* **W SHERWOOD WAY** **$86,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111456	MERLOT AVE	3042 MERLOT AVE	S WOLFTRAP ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92906	0.7 to 1.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
92907	3.4 to 5.1 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	8	SF	$120	**$1,020**
92908	7.3 to 13.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	30	SF	$120	**$3,600**
92909	19.0 to 21.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
92910	21.2 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92913	25.1 to 44.9 feet	Key Note Segment		5 ft	99			
92911	48.9 to 59.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
92912	60.9 to 67.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **3042 MERLOT AVE** **$19,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211039	MERLOT AVE	706 MERLOT AVE	SANTA BONITA ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78930	0.8 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
78973	3.4 to 22.9 feet	Key Note Segment		5 ft	98			
78918	4.0 to 5.0 feet	**Vertical Change**	.69"	5 ft	5	REF		
78919	5.9 to 6.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
78931	23.4 to 34.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	54	SF	$40	**$2,140**
78932	34.6 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
78933	38.5 to 60.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
78920	48.9 to 49.9 feet	**Vertical Change**	1.1"	5 ft	5	REF		
78934	60.4 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
78935	64.3 to 68.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
78936	68.7 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
78937	76.5 to 77.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
78938	78.3 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
78974	87.6 to 107.6 feet	Key Note Segment		5 ft	100			
78939	108.6 to 111.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
78975	114.4 to 135.2 feet	Key Note Segment		5 ft	104			
78940	136.1 to 138.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
78941	140.5 to 153.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
78942	153.8 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
78943	162.8 to 170.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
78944	170.9 to 191.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
78976	191.9 to 212.2 feet	Key Note Segment		5 ft	102			
78921	193.3 to 194.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
78945	214.0 to 217.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
78977	217.8 to 237.3 feet	Key Note Segment		5 ft	98			
78946	239.0 to 262.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
78947	263.1 to 269.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
78948	269.8 to 294.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211039	MERLOT AVE	706 MERLOT AVE	SANTA BONITA ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78922	283.0 to 284.0 feet	Vertical Change	.29"	5 ft	5	REF		
78978	295.2 to 315.8 feet	Key Note Segment		5 ft	103			
78949	316.4 to 317.9 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	8	SF	$40	$300
78923	317.4 to 318.4 feet	Vertical Change	.27"	5 ft	5	REF		
78950	318.2 to 320.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
78979	322.6 to 340.6 feet	Key Note Segment		5 ft	90			
78924	331.9 to 332.9 feet	Vertical Change	.29"	5 ft	5	REF		
78951	341.7 to 354.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	$7,380
78925	342.8 to 343.8 feet	Vertical Change	.32"	5 ft	5	REF		
78926	348.2 to 349.2 feet	Vertical Change	.28"	5 ft	5	REF		
78927	353.3 to 354.3 feet	Vertical Change	.28"	5 ft	5	REF		
78952	356.2 to 357.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
78953	361.3 to 363.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
78954	366.8 to 371.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
78955	376.1 to 377.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
78956	381.8 to 390.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
78957	393.3 to 399.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
78980	400.3 to 420.4 feet	Key Note Segment		5 ft	101			
78928	419.2 to 420.2 feet	Vertical Change	.29"	5 ft	5	REF		
78958	421.3 to 425.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	$2,700
78981	425.8 to 445.8 feet	Key Note Segment		5 ft	100			
78959	446.0 to 447.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$260
78960	450.0 to 460.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
78961	460.8 to 463.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,800
78962	463.8 to 472.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
78963	474.5 to 475.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
78964	475.8 to 480.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
78965	480.3 to 503.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	$13,680

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211039	MERLOT AVE	706 MERLOT AVE	SANTA BONITA ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78982	503.1 to 524.3 feet	Key Note Segment		5 ft	106			
78929	523.2 to 524.2 feet	Vertical Change	.43"	5 ft	5	REF		
78966	524.7 to 525.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
78967	527.0 to 533.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
78983	533.1 to 552.8 feet	Key Note Segment		5 ft	98			
78968	554.3 to 555.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
78969	555.3 to 560.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
78970	564.5 to 566.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
78971	567.8 to 572.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
78972	572.8 to 574.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **706 MERLOT AVE** **$167,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111129	MERLOT AVE	BARBERA AVE	CHABLIS AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91270	0.5 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91287	15.7 to 16.8 feet		5.0-6.0%	5 ft	6			
91252	20.2 to 21.2 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
91271	26.1 to 27.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91272	27.5 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91288	31.0 to 32.0 feet		5.0-6.0%	5 ft	5			
91273	31.8 to 32.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
91253	32.2 to 33.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
91254	34.5 to 35.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
91274	39.5 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91255	39.9 to 40.9 feet	**Vertical Change**	3.48"	5 ft	5	REF		
91275	49.0 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
91276	66.2 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
91256	71.7 to 72.7 feet	**Vertical Change**	2.71"	5 ft	5	SF	$75	**$375**
91277	75.8 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91278	77.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
91257	80.1 to 81.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
91279	82.0 to 89.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
91280	94.4 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
91258	97.5 to 98.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
91281	98.9 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91259	100.2 to 101.2 feet	**Vertical Change**	3.54"	5 ft	5	REF		
91282	101.3 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
91260	103.8 to 104.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
91261	116.1 to 117.1 feet	**Vertical Change**	2.88"	5 ft	5	SF	$75	**$375**
91262	119.4 to 120.4 feet	**Vertical Change**	1.27"	5 ft	5	SF	$75	**$375**
91263	127.6 to 128.6 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
91283	128.7 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111129	MERLOT AVE	BARBERA AVE	CHABLIS AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91264	132.0 to 133.0 feet	Vertical Change	-.72"	5 ft	5	REF		
91265	136.2 to 137.2 feet	Vertical Change	.96"	5 ft	5	SF	$75	**$375**
91266	138.8 to 139.8 feet	Vertical Change	1.66"	5 ft	5	SF	$75	**$375**
91267	140.6 to 141.6 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
91268	145.5 to 146.5 feet	Vertical Change	.32"	5 ft	5	REF		
91284	146.0 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91285	154.2 to 155.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
91286	156.3 to 160.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
91269	161.9 to 162.9 feet	Vertical Change	3.35"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **BARBERA AVE** **$30,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211035	MERLOT AVE	BLUERIDGE DR	712 MERLOT AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78915	0.0 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
78913	7.9 to 8.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
78916	11.2 to 20.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,460**
78917	20.3 to 39.3 feet	Key Note Segment		5 ft	95			
78914	39.6 to 40.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **BLUERIDGE DR** **$12,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111142	MERLOT AVE	CHABLIS AVE	GRENACHE AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91408	1.5 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,780
91409	12.4 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
91410	16.0 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,440
91389	20.3 to 21.3 feet	Vertical Change	2.63"	5 ft	5	REF		
91390	24.9 to 25.9 feet	Vertical Change	2.07"	5 ft	5	SF	$75	$375
91411	26.2 to 28.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,260
91391	27.1 to 30.3 feet	Vertical Change	3.11"	5 ft	16	REF		
91412	30.1 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,400
91392	31.6 to 32.6 feet	Vertical Change	3.46"	5 ft	5	REF		
91393	36.2 to 41.8 feet	Vertical Change	3.12"	5 ft	28	REF		
91413	46.4 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
91394	46.9 to 47.9 feet	Vertical Change	.47"	5 ft	5	REF		
91414	51.3 to 52.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
91415	52.8 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
91395	54.3 to 55.3 feet	Vertical Change	2.55"	5 ft	5	REF		
91396	56.6 to 57.6 feet	Vertical Change	2.2"	5 ft	5	REF		
91397	59.0 to 60.0 feet	Vertical Change	.91"	5 ft	5	REF		
91416	62.2 to 65.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
91398	64.2 to 65.2 feet	Vertical Change	-.35"	5 ft	5	REF		
91399	67.7 to 73.3 feet	Vertical Change	2.4"	5 ft	28	REF		
91417	68.5 to 69.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
91418	74.5 to 77.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
91400	74.6 to 75.6 feet	Vertical Change	2.1"	5 ft	5	REF		
91401	76.9 to 77.9 feet	Vertical Change	1.75"	5 ft	5	REF		
91419	78.4 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
91402	79.1 to 82.4 feet	Vertical Change	2.47"	5 ft	17	REF		
91420	83.0 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
91403	88.3 to 89.3 feet	Vertical Change	1.87"	5 ft	5	SF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111142	MERLOT AVE	CHABLIS AVE	GRENACHE AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91404	90.5 to 91.5 feet	**Vertical Change**	2.36"	5 ft	5	REF		
91421	91.3 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
91405	98.6 to 99.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
91406	101.8 to 102.8 feet	**Vertical Change**	2.79"	5 ft	5	REF		
91422	106.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91423	112.5 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
91407	115.9 to 116.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
91424	132.8 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
91425	148.9 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
91426	158.0 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
91427	162.9 to 166.2 feet		5.0-6.0%	5 ft	17			
91428	162.9 to 166.2 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **CHABLIS AVE** **$61,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111031	MERLOT AVE	GRANADA DR	PETITE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90445	0.0 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
90431	13.3 to 14.3 feet	**Vertical Change**	.61"	5 ft	5	REF		
90446	14.2 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90447	35.1 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
90448	41.5 to 68.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	135	SF	$120	**$16,200**
90449	70.7 to 87.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
90450	88.8 to 105.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,900**
90451	106.8 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
90432	113.5 to 114.5 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
90452	116.4 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
90433	125.1 to 126.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
90434	133.8 to 134.8 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
90453	144.7 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
90454	147.0 to 155.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
90455	155.8 to 157.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90456	160.8 to 167.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
90457	170.4 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
90435	173.2 to 174.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
90436	176.4 to 177.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
90464	178.3 to 179.5 feet		5.0-6.0%	5 ft	6			
90437	178.6 to 179.6 feet	**Vertical Change**	3.96"	5 ft	5	SF	$75	**$375**
90438	184.2 to 185.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
90439	185.9 to 186.9 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
90458	187.5 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
90440	193.0 to 194.0 feet	**Vertical Change**	.57"	5 ft	5	REF		
90459	193.9 to 196.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
90441	196.1 to 197.1 feet	**Vertical Change**	.65"	5 ft	5	REF		
90442	202.0 to 203.0 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111031	MERLOT AVE	GRANADA DR	PETITE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90460	202.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90443	207.5 to 208.5 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
90444	214.3 to 215.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
90461	221.8 to 225.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
90462	226.6 to 234.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
90463	237.1 to 241.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **GRANADA DR** **$86,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111117	MERLOT AVE	GRENACHE AVE	PETITE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91070	0.0 to 4.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
91071	4.4 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
91041	22.8 to 23.8 feet	**Vertical Change**	2.04"	5 ft	5	SF	$75	**$375**
91072	24.5 to 25.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
91073	29.6 to 30.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
91074	31.1 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91075	56.4 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91043	57.3 to 58.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
91076	60.8 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91044	63.8 to 64.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
91077	64.2 to 66.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	10	SF	$120	**$1,200**
91045	67.5 to 68.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
91078	67.9 to 70.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
91079	72.0 to 73.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	7	SF	$120	**$840**
91046	77.0 to 78.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
91047	80.7 to 83.9 feet	**Vertical Change**	3.46"	5 ft	16	SF	$75	**$1,200**
91120	91.8 to 108.8 feet	Key Note Segment		5 ft	85			
91048	93.1 to 94.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
91049	110.2 to 111.2 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
91080	115.1 to 120.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
91050	119.2 to 120.2 feet	**Vertical Change**	-.78"	5 ft	5	REF		
91051	123.5 to 124.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
91052	127.7 to 128.7 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
91081	130.1 to 131.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
91053	133.7 to 134.7 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
91082	138.7 to 141.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
91083	145.2 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
91084	152.7 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111117	MERLOT AVE	GRENACHE AVE	PETITE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91085	157.9 to 159.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
91086	160.7 to 162.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
91121	163.8 to 179.3 feet	Key Note Segment		5 ft	77			
91122	191.1 to 206.2 feet	Key Note Segment		5 ft	76			
91054	198.1 to 199.1 feet	**Vertical Change**	3.49"	5 ft	5	REF		
91055	202.6 to 212.7 feet	**Vertical Change**	3.52"	5 ft	51	REF		
91087	207.8 to 210.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
91088	216.6 to 220.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
91089	231.2 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
91090	244.2 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
91091	249.8 to 257.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
91092	257.0 to 260.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
91123	260.5 to 274.3 feet	Key Note Segment		5 ft	69			
91093	274.3 to 277.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
91094	279.8 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91095	288.2 to 289.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91124	295.1 to 308.9 feet	Key Note Segment		5 ft	69			
91096	309.1 to 311.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$380**
91097	328.3 to 330.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
91098	332.5 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
91099	339.8 to 355.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
91100	359.5 to 373.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
91125	374.3 to 387.3 feet	Key Note Segment		5 ft	65			
91056	399.1 to 400.1 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
91101	413.5 to 414.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91057	417.8 to 418.8 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**
91102	419.1 to 420.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91058	420.0 to 421.0 feet	**Vertical Change**	3.72"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111117	MERLOT AVE	GRENACHE AVE	PETITE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91103	421.7 to 425.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
91126	425.3 to 438.6 feet	Key Note Segment		5 ft	67			
91059	447.1 to 448.1 feet	**Vertical Change**	3.47"	5 ft	5	SF	$75	**$375**
91129	447.4 to 448.8 feet		5.0-6.0%	5 ft	7			
91104	452.3 to 458.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
91060	459.5 to 460.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
91105	465.9 to 468.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91106	470.9 to 472.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
91127	472.7 to 486.6 feet	Key Note Segment		5 ft	70			
91061	474.2 to 475.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
91062	493.1 to 494.1 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
91107	495.5 to 497.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
91128	504.0 to 520.1 feet	Key Note Segment		5 ft	81			
91063	518.6 to 519.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
91108	531.3 to 533.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
91064	534.0 to 535.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
91109	541.9 to 546.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
91110	548.0 to 549.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
91111	550.8 to 560.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
91130	556.2 to 557.8 feet		5.0-6.0%	5 ft	8			
91112	560.2 to 561.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
91113	564.3 to 565.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
91114	567.9 to 569.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
91115	585.2 to 586.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91065	587.3 to 590.6 feet	**Vertical Change**	3.46"	5 ft	17	SF	$75	**$1,238**
91066	596.4 to 597.4 feet	**Vertical Change**	3.46"	5 ft	5	SF	$75	**$375**
91116	598.7 to 599.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
91067	604.3 to 607.0 feet	**Vertical Change**	.28"	5 ft	14	LF	$75	**$1,013**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111117	MERLOT AVE	GRENACHE AVE	PETITE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91117	606.2 to 608.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
91068	607.7 to 613.1 feet	**Vertical Change**	3.45"	5 ft	27	REF		
91069	619.1 to 620.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
91118	622.3 to 623.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91131	629.1 to 632.3 feet		5.0-6.0%	5 ft	16			
91119	631.8 to 632.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **GRENACHE AVE** **$108,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111120	MERLOT AVE	PETITE AVE	BARBERA AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91136	4.3 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
91137	8.8 to 11.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
91132	11.8 to 12.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
91138	15.3 to 18.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
91139	20.7 to 22.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
91140	24.2 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
91141	30.5 to 32.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
91142	35.2 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
91143	58.4 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91144	61.8 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
91145	69.6 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
91146	74.5 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
91133	78.1 to 79.1 feet	**Vertical Change**	1.58"	5 ft	5	SF	$75	**$375**
91134	82.0 to 83.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
91147	85.8 to 109.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
91148	111.6 to 113.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
91149	113.6 to 115.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
91150	115.8 to 117.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
91151	118.6 to 122.1 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	18	SF	$120	**$2,100**
91152	122.1 to 123.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
91153	126.8 to 128.6 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	9	SF	$120	**$1,080**
91154	129.7 to 136.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	35	SF	$120	**$4,140**
91160	136.0 to 137.3 feet		10.0-11.0%	5 ft	7			
91135	137.3 to 138.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
91155	144.5 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
91156	147.4 to 151.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
91157	151.3 to 152.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91158	153.9 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111120	MERLOT AVE	PETITE AVE	BARBERA AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91159	157.9 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **PETITE AVE** **$60,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111155	MERLOT AVE	PETITE AVE	GRANADA DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91601	1.5 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
91592	8.1 to 9.1 feet	**Vertical Change**	2.54"	5 ft	5	REF		
91602	11.7 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
91603	46.5 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
91604	63.9 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
91605	83.8 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
91606	105.8 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
91593	109.2 to 110.2 feet	**Vertical Change**	1.53"	5 ft	5	SF	$75	**$375**
91607	113.7 to 116.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
91594	115.6 to 116.6 feet	**Vertical Change**	-.81"	5 ft	5	REF		
91595	119.5 to 120.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
91596	122.0 to 123.0 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
91608	132.3 to 151.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,220**
91623	132.4 to 133.9 feet		5.0-6.0%	5 ft	8			
91597	140.3 to 141.3 feet	**Vertical Change**	3.11"	5 ft	5	REF		
91609	151.8 to 153.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,140**
91598	153.1 to 154.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
91610	155.8 to 164.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
91599	163.4 to 164.4 feet	**Vertical Change**	-.43"	5 ft	5	REF		
91611	166.5 to 167.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
91612	170.2 to 174.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
91613	175.8 to 176.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
91614	179.2 to 185.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
91615	188.8 to 193.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
91616	193.8 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
91617	203.8 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91618	218.3 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
91600	225.3 to 226.3 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111155	MERLOT AVE	PETITE AVE	GRANADA DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91619	229.3 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
91620	230.8 to 233.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
91621	235.8 to 239.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
91622	241.3 to 243.4 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	11	SF	$120	**$1,260**
91624	242.4 to 244.8 feet		5.0-6.0%	5 ft	12			
91625	242.4 to 244.8 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **PETITE AVE** **$101,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111528	MERLOT AVE	S TIMBERLINE DR	WESTBERRY BVD	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93088	0.6 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
93089	13.7 to 49.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,720**
93090	51.6 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
93085	70.0 to 71.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
93086	74.6 to 75.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
93091	84.8 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93087	97.9 to 98.9 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
93092	107.4 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
93093	129.4 to 136.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
93094	136.3 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
93095	143.1 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
93096	177.2 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **S TIMBERLINE DR** **$87,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111455	MERLOT AVE	S TIMBERLINE DR	3042 MERLOT AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92862	0.0 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
92837	8.8 to 9.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
92863	13.6 to 20.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
92895	20.4 to 40.0 feet	Key Note Segment		5 ft	98			
92838	21.0 to 22.0 feet	**Vertical Change**	-.64"	5 ft	5	REF		
92839	30.9 to 31.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
92840	39.7 to 40.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
92864	41.6 to 47.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
92865	49.3 to 53.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
92841	49.5 to 50.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
92866	53.6 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
92842	62.5 to 63.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
92896	64.9 to 94.3 feet	Key Note Segment		5 ft	147			
92843	78.4 to 79.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
92867	97.6 to 105.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
92868	107.6 to 108.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
92897	108.7 to 130.2 feet	Key Note Segment		5 ft	107			
92844	129.5 to 130.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
92845	132.7 to 133.7 feet	**Vertical Change**	-.56"	5 ft	5	SF	$75	**$375**
92869	136.5 to 142.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
92870	142.0 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
92871	154.8 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,900**
92872	166.7 to 181.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
92847	169.9 to 170.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
92898	181.9 to 201.6 feet	Key Note Segment		5 ft	99			
92873	202.3 to 209.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,500**
92899	209.8 to 236.7 feet	Key Note Segment		5 ft	135			
92848	219.7 to 220.7 feet	**Vertical Change**	-.69"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111455	MERLOT AVE	S TIMBERLINE DR	3042 MERLOT AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92849	226.0 to 227.0 feet	Vertical Change	-.41"	5 ft	5	REF		
92874	238.8 to 240.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
92850	242.2 to 243.2 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
92875	266.9 to 273.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
92876	275.6 to 282.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
92900	282.2 to 310.3 feet	Key Note Segment		5 ft	141			
92851	282.9 to 283.9 feet	Vertical Change	-.26"	5 ft	5	REF		
92852	288.3 to 289.3 feet	Vertical Change	.31"	5 ft	5	REF		
92877	311.2 to 312.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
92878	312.9 to 317.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
92901	318.5 to 337.3 feet	Key Note Segment		5 ft	94			
92853	328.2 to 329.2 feet	Vertical Change	.27"	5 ft	5	REF		
92879	339.2 to 358.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,460**
92854	339.4 to 340.4 feet	Vertical Change	.48"	5 ft	5	REF		
92855	347.4 to 348.4 feet	Vertical Change	-.41"	5 ft	5	REF		
92880	359.3 to 369.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
92856	360.3 to 361.3 feet	Vertical Change	.27"	5 ft	5	REF		
92881	369.4 to 379.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
92882	380.5 to 385.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
92883	385.8 to 394.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
92857	386.1 to 387.1 feet	Vertical Change	.27"	5 ft	5	REF		
92884	394.2 to 398.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92902	398.1 to 417.8 feet	Key Note Segment		5 ft	99			
92885	419.3 to 426.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
92903	426.5 to 444.8 feet	Key Note Segment		5 ft	92			
92886	446.4 to 464.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**
92858	456.6 to 457.6 feet	Vertical Change	-.27"	5 ft	5	REF		
92887	465.4 to 471.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111455	MERLOT AVE	S TIMBERLINE DR	3042 MERLOT AVE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92888	471.9 to 505.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,160**
92859	494.2 to 495.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
92904	505.9 to 525.5 feet	Key Note Segment		5 ft	98			
92860	515.9 to 516.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
92889	525.8 to 533.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	38	SF	$40	**$1,500**
92905	534.1 to 553.5 feet	Key Note Segment		5 ft	97			
92890	554.5 to 579.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	126	SF	$40	**$5,040**
92891	582.2 to 584.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
92861	583.1 to 584.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
92892	588.3 to 600.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
92893	605.3 to 606.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
92894	606.8 to 609.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **S TIMBERLINE DR** **$158,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111448	MERLOT AVE	S WOLFTRAP ST	S TIMBERLINE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92794	0.6 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
92795	7.4 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
92796	17.0 to 19.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,740**
92824	19.9 to 38.8 feet	Key Note Segment		5 ft	94			
92768	30.0 to 31.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92797	41.2 to 45.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
92825	46.9 to 67.8 feet	Key Note Segment		5 ft	105			
92769	57.0 to 58.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
92770	67.5 to 68.5 feet	**Vertical Change**	-.59"	5 ft	5	REF		
92798	71.2 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
92771	92.8 to 93.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
92826	102.0 to 132.7 feet	Key Note Segment		5 ft	153			
92772	102.1 to 103.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
92773	111.2 to 112.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
92799	133.7 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
92800	145.2 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
92801	160.6 to 175.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
92774	170.2 to 171.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
92802	175.2 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
92827	182.3 to 202.0 feet	Key Note Segment		5 ft	99			
92803	202.8 to 209.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
92828	209.8 to 236.8 feet	Key Note Segment		5 ft	135			
92804	239.1 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92805	246.3 to 249.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
92775	251.9 to 252.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
92806	257.3 to 282.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,880**
92776	277.0 to 278.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
92829	282.1 to 310.5 feet	Key Note Segment		5 ft	142			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111448	MERLOT AVE	S WOLFTRAP ST	S TIMBERLINE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92777	282.7 to 283.7 feet	Vertical Change	-.39"	5 ft	5	REF		
92778	293.0 to 294.0 feet	Vertical Change	.45"	5 ft	5	REF		
92807	311.8 to 317.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
92830	317.6 to 345.2 feet	Key Note Segment		5 ft	138			
92779	327.0 to 328.0 feet	Vertical Change	.31"	5 ft	5	REF		
92808	345.8 to 368.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,320**
92809	369.1 to 376.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
92810	376.3 to 386.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
92831	390.1 to 417.3 feet	Key Note Segment		5 ft	136			
92780	400.9 to 401.9 feet	Vertical Change	.27"	5 ft	5	REF		
92781	407.3 to 408.3 feet	Vertical Change	.53"	5 ft	5	REF		
92811	418.4 to 423.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
92832	425.0 to 452.7 feet	Key Note Segment		5 ft	139			
92782	435.5 to 436.5 feet	Vertical Change	.67"	5 ft	5	REF		
92783	442.1 to 443.1 feet	Vertical Change	-.32"	5 ft	5	REF		
92812	454.8 to 459.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
92813	460.7 to 466.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
92784	466.9 to 467.9 feet	Vertical Change	.54"	5 ft	5	REF		
92814	467.0 to 484.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
92815	486.6 to 496.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
92785	492.9 to 493.9 feet	Vertical Change	-.31"	5 ft	5	REF		
92833	496.7 to 523.9 feet	Key Note Segment		5 ft	136			
92786	508.1 to 509.1 feet	Vertical Change	.27"	5 ft	5	REF		
92816	525.3 to 532.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
92834	532.8 to 559.6 feet	Key Note Segment		5 ft	134			
92787	543.0 to 544.0 feet	Vertical Change	.31"	5 ft	5	REF		
92788	549.4 to 550.4 feet	Vertical Change	-.45"	5 ft	5	REF		
92817	560.8 to 562.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111448	MERLOT AVE	S WOLFTRAP ST	S TIMBERLINE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92818	564.1 to 578.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
92819	580.8 to 586.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
92820	588.0 to 603.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
92789	601.0 to 602.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
92835	604.3 to 632.5 feet	Key Note Segment		5 ft	141			
92790	616.0 to 617.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
92791	622.5 to 623.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
92821	632.7 to 638.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,540**
92836	639.8 to 659.1 feet	Key Note Segment		5 ft	97			
92792	642.0 to 643.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
92822	660.0 to 677.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
92823	677.3 to 681.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
92793	681.1 to 682.1 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **S WOLFTRAP ST** **$178,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211009	MERLOT AVE	SANTA BONITA ST	BLUERIDGE DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78668	0.2 to 2.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
78669	2.9 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
78670	4.6 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
78671	7.8 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
78704	18.1 to 38.4 feet	Key Note Segment		5 ft	101			
78672	39.2 to 45.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
78705	45.4 to 65.8 feet	Key Note Segment		5 ft	102			
78673	65.8 to 69.1 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	16	SF	$40	**$660**
78674	69.1 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
78675	71.3 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
78656	71.8 to 72.8 feet	Vertical Change	.34"	5 ft	5	REF		
78657	84.7 to 85.7 feet	Vertical Change	.32"	5 ft	5	REF		
78676	89.8 to 93.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
78677	93.2 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
78706	122.1 to 142.6 feet	Key Note Segment		5 ft	103			
78678	145.6 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
78707	147.9 to 168.5 feet	Key Note Segment		5 ft	103			
78679	170.3 to 224.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	272	SF	$120	**$32,580**
78708	224.6 to 244.8 feet	Key Note Segment		5 ft	101			
78680	245.2 to 251.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	30	SF	$40	**$1,180**
78709	251.1 to 270.3 feet	Key Note Segment		5 ft	96			
78681	270.3 to 273.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	15	SF	$40	**$600**
78682	278.3 to 326.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	239	SF	$120	**$28,680**
78710	328.0 to 347.7 feet	Key Note Segment		5 ft	99			
78659	338.1 to 339.1 feet	Vertical Change	.29"	5 ft	5	REF		
78683	348.1 to 352.0 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	20	SF	$40	**$780**
78660	350.7 to 351.7 feet	Vertical Change	.28"	5 ft	5	REF		
78711	354.3 to 374.4 feet	Key Note Segment		5 ft	101			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211009	MERLOT AVE	SANTA BONITA ST	BLUERIDGE DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78684	375.1 to 385.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
78685	385.0 to 393.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
78686	393.6 to 400.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
78687	400.3 to 409.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
78688	412.9 to 417.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
78689	418.2 to 429.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
78712	429.8 to 449.3 feet	Key Note Segment		5 ft	98			
78690	450.8 to 452.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
78713	456.3 to 475.3 feet	Key Note Segment		5 ft	95			
78691	475.3 to 495.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	99	SF	$40	**$3,940**
78692	498.6 to 507.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
78693	509.8 to 519.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
78694	520.4 to 532.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,140**
78714	533.3 to 552.6 feet	Key Note Segment		5 ft	97			
78661	535.6 to 536.6 feet	**Vertical Change**	2.44"	5 ft	5	REF		
78662	542.9 to 543.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
78663	551.9 to 552.9 feet	**Vertical Change**	-.54"	5 ft	5	REF		
78695	555.2 to 556.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
78696	556.8 to 558.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
78715	559.2 to 578.5 feet	Key Note Segment		5 ft	96			
78664	577.3 to 578.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
78697	580.0 to 601.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,780**
78698	601.5 to 606.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
78665	607.5 to 608.5 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
78716	607.7 to 627.1 feet	Key Note Segment		5 ft	97			
78699	627.3 to 635.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	40	SF	$40	**$1,600**
78700	635.7 to 640.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
78701	644.9 to 650.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211009	MERLOT AVE	SANTA BONITA ST	BLUERIDGE DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78717	650.5 to 671.5 feet	Key Note Segment		5 ft	105			
78666	668.1 to 669.1 feet	**Vertical Change**	1.3"	5 ft	5	REF		
78667	670.4 to 671.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
78702	672.4 to 674.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
78703	674.8 to 676.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **MERLOT AVE** *Starting at:* **SANTA BONITA ST** **$189,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111304	MERLOT AVE	WESTBERRY BVD	S TIMBERLINE DR	19

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91735	5.5 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
91736	15.1 to 19.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
91737	19.1 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
91738	30.3 to 44.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
91739	44.1 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
91740	52.3 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
91741	58.3 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
91742	79.3 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
91743	88.7 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
91744	93.6 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91745	105.3 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
91746	114.4 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
91747	123.8 to 125.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
91748	126.8 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
91749	135.8 to 141.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
91750	147.5 to 167.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
91751	176.8 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91752	183.5 to 185.2 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: S *side of* **MERLOT AVE** *Starting at:* **WESTBERRY BVD** **$69,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081056	MICHOACAN CT	1419 MICHOACAN CT	1490 MICHOACAN CT	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125564	1.3 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
125565	4.5 to 14.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
125566	15.1 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
125574	16.8 to 34.8 feet	Key Note Segment		5 ft	90			
125561	35.7 to 36.7 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
125567	37.3 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
125568	39.7 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
125569	57.4 to 73.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
125562	67.0 to 68.0 feet	**Vertical Change**	.67"	5 ft	5	REF		
125570	73.6 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
125563	74.4 to 75.4 feet	**Vertical Change**	.5"	5 ft	5	REF		
125575	85.2 to 106.8 feet	Key Note Segment		5 ft	108			
125571	109.0 to 115.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
125572	115.6 to 137.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
125576	138.4 to 156.3 feet	Key Note Segment		5 ft	90			
125573	158.0 to 162.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: S *side of* **MICHOACAN CT** *Starting at:* **1419 MICHOACAN CT** **$54,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081054	MICHOACAN CT	1491 MICHOACAN CT	1471 MICHOACAN CT	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125558	0.6 to 17.5 feet	Key Note Segment		5 ft	85			
125548	9.8 to 10.8 feet	Vertical Change	2.31"	5 ft	5	REF		
125554	19.3 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
125555	30.7 to 44.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
125549	38.6 to 39.6 feet	Vertical Change	-.27"	5 ft	5	REF		
125559	46.8 to 68.8 feet	Key Note Segment		5 ft	110			
125550	54.9 to 55.9 feet	Vertical Change	.5"	5 ft	5	REF		
125556	78.8 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
125557	81.5 to 120.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	193	SF	$120	**$23,160**
125551	91.7 to 92.7 feet	Vertical Change	-.35"	5 ft	5	REF		
125552	96.5 to 97.5 feet	Vertical Change	-.46"	5 ft	5	REF		
125560	121.6 to 138.8 feet	Key Note Segment		5 ft	86			
125553	130.2 to 131.2 feet	Vertical Change	-.34"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MICHOACAN CT** *Starting at:* **1491 MICHOACAN CT** **$39,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081058	MICHOACAN CT	1498 MICHOACAN CT	JERICHO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125578	0.3 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
125579	7.3 to 11.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
125580	14.2 to 51.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	186	SF	$120	**$22,260**
125584	51.3 to 69.3 feet	Key Note Segment		5 ft	90			
125581	71.0 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
125585	76.0 to 94.7 feet	Key Note Segment		5 ft	94			
125577	94.1 to 95.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125582	97.0 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
125583	103.3 to 113.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**

TOTAL COST FOR: S *side of* **MICHOACAN CT** *Starting at:* **1498 MICHOACAN CT** **$41,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081111	MICHOACAN CT	1621 MICHOACAN CT	JERICHO DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125741	0.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
125737	5.6 to 6.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
125751	5.8 to 24.4 feet	Key Note Segment		5 ft	93			
125738	15.2 to 16.2 feet	**Vertical Change**	-.61"	5 ft	5	REF		
125739	24.7 to 25.7 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
125752	30.4 to 48.9 feet	Key Note Segment		5 ft	93			
125742	50.5 to 58.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
125743	61.3 to 99.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	192	SF	$120	**$22,980**
125740	101.7 to 102.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
125753	101.7 to 120.0 feet	Key Note Segment		5 ft	92			
125744	122.2 to 125.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
125754	125.7 to 144.5 feet	Key Note Segment		5 ft	94			
125745	146.2 to 169.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
125746	171.8 to 180.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
125747	182.8 to 197.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
125755	197.5 to 216.2 feet	Key Note Segment		5 ft	94			
125748	218.1 to 219.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
125749	219.6 to 221.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
125756	221.7 to 240.4 feet	Key Note Segment		5 ft	94			
125750	241.9 to 258.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**

TOTAL COST FOR: N *side of* **MICHOACAN CT** *Starting at:* **1621 MICHOACAN CT** **$72,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081109	MICHOACAN CT	1633 MICHOACAN CT	1621 MICHOACAN CT	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125733	3.0 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
125730	5.8 to 6.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
125736	7.9 to 23.8 feet	Key Note Segment		5 ft	80			
125731	16.2 to 17.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
125734	30.9 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
125735	51.8 to 74.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	**$13,860**
125732	69.9 to 70.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MICHOACAN CT** *Starting at:* **1633 MICHOACAN CT** **$28,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081108	MICHOACAN CT	1645 MICHOACAN CT	1645 MICHOACAN CT	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125726	0.6 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
125727	8.7 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
125729	12.1 to 31.3 feet	Key Note Segment		5 ft	96			
125724	21.4 to 22.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
125728	34.1 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
125725	40.1 to 41.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MICHOACAN CT** *Starting at:* **1645 MICHOACAN CT** **$10,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081052	MICHOACAN CT	JERICHO DR	1499 MICHOACAN CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125523	1.6 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
125510	5.8 to 6.8 feet	**Vertical Change**	3.09"	5 ft	5	REF		
125541	17.9 to 37.3 feet	Key Note Segment		5 ft	97			
125511	24.8 to 25.8 feet	**Vertical Change**	3.45"	5 ft	5	REF		
125524	38.2 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
125542	43.8 to 61.0 feet	Key Note Segment		5 ft	86			
125525	63.8 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
125526	69.2 to 71.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
125527	72.0 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
125528	76.3 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
125512	81.2 to 82.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
125513	84.4 to 85.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
125543	114.8 to 132.0 feet	Key Note Segment		5 ft	86			
125544	139.2 to 155.9 feet	Key Note Segment		5 ft	84			
125515	153.1 to 154.1 feet	**Vertical Change**	1.93"	5 ft	5	REF		
125529	157.8 to 166.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,980**
125530	166.1 to 178.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,320**
125531	180.8 to 209.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,920**
125516	196.1 to 197.1 feet	**Vertical Change**	1.98"	5 ft	5	REF		
125545	210.6 to 228.0 feet	Key Note Segment		5 ft	87			
125517	219.0 to 220.0 feet	**Vertical Change**	2.54"	5 ft	5	REF		
125532	229.5 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125533	233.3 to 234.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
125546	234.8 to 252.3 feet	Key Note Segment		5 ft	88			
125534	254.2 to 260.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
125535	260.8 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
125518	261.9 to 262.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125536	265.8 to 269.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081052	MICHOACAN CT	JERICHO DR	1499 MICHOACAN CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125537	272.0 to 289.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
125519	282.4 to 283.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125538	289.4 to 295.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
125539	295.8 to 300.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
125520	299.0 to 300.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
125540	300.3 to 307.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
125521	300.8 to 301.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
125547	307.1 to 323.0 feet	Key Note Segment		5 ft	79			
125522	315.5 to 316.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **MICHOACAN CT** *Starting at:* **JERICHO DR** **$97,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081107	MICHOACAN CT	JERICHO DR	1645 MICHOACAN CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125686	0.0 to 19.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
125711	19.4 to 37.1 feet	Key Note Segment		5 ft	89			
125687	38.8 to 43.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
125712	44.0 to 60.8 feet	Key Note Segment		5 ft	84			
125614	45.2 to 46.2 feet	**Vertical Change**	3.4"	5 ft	5	REF		
125615	47.5 to 50.8 feet	**Vertical Change**	2.98"	5 ft	17	REF		
125616	54.3 to 55.3 feet	**Vertical Change**	2.93"	5 ft	5	REF		
125617	56.7 to 57.7 feet	**Vertical Change**	.92"	5 ft	5	REF		
125688	62.5 to 101.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	197	SF	$120	**$23,640**
125618	63.4 to 64.4 feet	**Vertical Change**	2.88"	5 ft	5	REF		
125619	65.6 to 66.6 feet	**Vertical Change**	3.35"	5 ft	5	REF		
125620	67.9 to 68.9 feet	**Vertical Change**	2.9"	5 ft	5	REF		
125621	70.2 to 71.2 feet	**Vertical Change**	2.51"	5 ft	5	REF		
125622	72.5 to 73.5 feet	**Vertical Change**	.54"	5 ft	5	REF		
125623	74.7 to 75.7 feet	**Vertical Change**	2.01"	5 ft	5	REF		
125624	77.0 to 82.5 feet	**Vertical Change**	1.63"	5 ft	28	REF		
125625	83.8 to 84.8 feet	**Vertical Change**	1.24"	5 ft	5	REF		
125626	86.1 to 96.1 feet	**Vertical Change**	3.35"	5 ft	50	REF		
125627	97.4 to 100.7 feet	**Vertical Change**	2.97"	5 ft	17	REF		
125628	101.9 to 105.2 feet	**Vertical Change**	3.28"	5 ft	17	REF		
125689	101.9 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
125629	106.5 to 107.5 feet	**Vertical Change**	1.95"	5 ft	5	REF		
125630	108.8 to 114.3 feet	**Vertical Change**	3.18"	5 ft	28	REF		
125713	114.8 to 132.3 feet	Key Note Segment		5 ft	88			
125631	115.6 to 116.6 feet	**Vertical Change**	2.86"	5 ft	5	REF		
125632	117.8 to 118.8 feet	**Vertical Change**	2.53"	5 ft	5	REF		
125633	120.1 to 121.1 feet	**Vertical Change**	.65"	5 ft	5	REF		
125634	122.3 to 123.3 feet	**Vertical Change**	2.37"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081107	MICHOACAN CT	JERICHO DR	1645 MICHOACAN CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125635	124.6 to 125.6 feet	Vertical Change	1.65"	5 ft	5	REF		
125636	133.7 to 134.7 feet	Vertical Change	3.04"	5 ft	5	REF		
125690	134.3 to 135.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
125637	136.0 to 137.0 feet	Vertical Change	1.45"	5 ft	5	REF		
125691	136.8 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125638	138.2 to 139.2 feet	Vertical Change	2.38"	5 ft	5	SF	$75	**$375**
125714	138.8 to 157.0 feet	Key Note Segment		5 ft	91			
125639	140.4 to 141.4 feet	Vertical Change	3.71"	5 ft	5	REF		
125640	142.8 to 143.8 feet	Vertical Change	2.47"	5 ft	5	REF		
125641	149.6 to 150.6 feet	Vertical Change	2.52"	5 ft	5	REF		
125642	151.9 to 152.9 feet	Vertical Change	.39"	5 ft	5	REF		
125643	156.3 to 157.3 feet	Vertical Change	3.45"	5 ft	5	REF		
125644	158.6 to 168.7 feet	Vertical Change	1.31"	5 ft	51	SF	$75	**$3,788**
125692	161.3 to 172.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,900**
125693	173.9 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
125645	179.6 to 180.6 feet	Vertical Change	.45"	5 ft	5	REF		
125646	181.3 to 186.9 feet	Vertical Change	2.14"	5 ft	28	REF		
125694	187.6 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
125647	197.1 to 198.1 feet	Vertical Change	2.6"	5 ft	5	REF		
125648	199.4 to 202.6 feet	Vertical Change	2.93"	5 ft	16	SF	$75	**$1,200**
125695	202.0 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
125649	203.9 to 204.9 feet	Vertical Change	3.22"	5 ft	5	REF		
125715	209.8 to 228.1 feet	Key Note Segment		5 ft	92			
125650	212.9 to 213.9 feet	Vertical Change	2.98"	5 ft	5	REF		
125651	215.2 to 216.2 feet	Vertical Change	2.68"	5 ft	5	REF		
125652	217.6 to 218.6 feet	Vertical Change	2.11"	5 ft	5	REF		
125653	219.4 to 220.4 feet	Vertical Change	.29"	5 ft	5	REF		
125654	222.1 to 223.1 feet	Vertical Change	2.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081107	MICHOACAN CT	JERICHO DR	1645 MICHOACAN CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125655	224.3 to 225.3 feet	Vertical Change	1.23"	5 ft	5	REF		
125656	226.6 to 229.7 feet	Vertical Change	.4"	5 ft	16	REF		
125696	230.2 to 234.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
125716	234.8 to 253.1 feet	Key Note Segment		5 ft	92			
125657	240.3 to 241.3 feet	Vertical Change	.39"	5 ft	5	REF		
125658	242.5 to 243.5 feet	Vertical Change	.72"	5 ft	5	REF		
125659	251.5 to 252.5 feet	Vertical Change	2.33"	5 ft	5	REF		
125660	253.2 to 254.2 feet	Vertical Change	-.3"	5 ft	5	REF		
125697	255.8 to 261.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
125661	258.3 to 266.1 feet	Vertical Change	2.4"	5 ft	39	REF		
125698	261.9 to 305.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	220	SF	$120	**$26,340**
125662	271.7 to 272.7 feet	Vertical Change	.29"	5 ft	5	REF		
125663	274.2 to 279.7 feet	Vertical Change	2.42"	5 ft	28	REF		
125664	280.9 to 281.9 feet	Vertical Change	3.06"	5 ft	5	REF		
125665	283.3 to 284.3 feet	Vertical Change	.51"	5 ft	5	REF		
125666	285.5 to 288.8 feet	Vertical Change	2.34"	5 ft	17	REF		
125667	296.9 to 300.2 feet	Vertical Change	1.41"	5 ft	17	REF		
125668	301.4 to 304.7 feet	Vertical Change	1.82"	5 ft	17	REF		
125717	305.8 to 323.7 feet	Key Note Segment		5 ft	90			
125669	306.0 to 307.0 feet	Vertical Change	.74"	5 ft	5	REF		
125670	315.2 to 316.2 feet	Vertical Change	.35"	5 ft	5	REF		
125671	317.3 to 318.3 feet	Vertical Change	2.72"	5 ft	5	REF		
125672	319.5 to 322.8 feet	Vertical Change	3.11"	5 ft	17	REF		
125673	324.5 to 325.5 feet	Vertical Change	-.29"	5 ft	5	REF		
125699	325.6 to 326.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
125674	326.3 to 327.3 feet	Vertical Change	2.61"	5 ft	5	REF		
125718	329.8 to 348.2 feet	Key Note Segment		5 ft	92			
125675	330.0 to 331.0 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081107	MICHOACAN CT	JERICHO DR	1645 MICHOACAN CT	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125676	333.1 to 334.1 feet	Vertical Change	3.26"	5 ft	5	REF		
125677	335.4 to 336.4 feet	Vertical Change	2.83"	5 ft	5	REF		
125678	337.7 to 340.9 feet	Vertical Change	2.47"	5 ft	16	REF		
125679	342.3 to 343.3 feet	Vertical Change	2.15"	5 ft	5	REF		
125700	350.6 to 357.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
125680	351.3 to 352.3 feet	Vertical Change	1.36"	5 ft	5	REF		
125701	357.9 to 379.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
125681	358.2 to 359.2 feet	Vertical Change	.31"	5 ft	5	REF		
125682	377.6 to 378.6 feet	Vertical Change	.46"	5 ft	5	REF		
125702	382.1 to 385.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
125703	385.6 to 400.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,120**
125683	398.9 to 399.9 feet	Vertical Change	2.97"	5 ft	5	REF		
125719	401.2 to 420.8 feet	Key Note Segment		5 ft	98			
125720	426.1 to 444.3 feet	Key Note Segment		5 ft	91			
125704	445.8 to 454.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
125705	454.8 to 496.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	207	SF	$120	**$24,840**
125706	496.2 to 506.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
125721	506.9 to 525.8 feet	Key Note Segment		5 ft	94			
125684	527.0 to 528.0 feet	Vertical Change	.26"	5 ft	5	REF		
125707	527.8 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
125708	537.3 to 539.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
125685	540.1 to 541.1 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
125709	542.2 to 546.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
125722	547.3 to 566.3 feet	Key Note Segment		5 ft	95			
125723	569.1 to 570.1 feet	Protruding Object	48"	5 ft	5	JOB	$99	**$99**
125710	569.6 to 579.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,820**

TOTAL COST FOR: S *side of* **MICHOACAN CT** *Starting at:* **JERICHO DR** **$185,536.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271444	MILANO LANE	LUCCA COURT	NAPOLI ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111599	27.1 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
111600	41.3 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
111601	50.5 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
111602	73.3 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
111603	87.0 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
111604	106.7 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
111596	111.7 to 112.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111598	158.8 to 159.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
111605	162.1 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111606	169.2 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: N *side of* **MILANO LANE** *Starting at:* **LUCCA COURT** **$36,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271358	MILANO LANE	MONTEREY ST	POMPEI ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111231	31.0 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111232	77.6 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
111233	81.8 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
111234	91.1 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
111229	96.5 to 97.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
111230	123.8 to 124.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **MILANO LANE** *Starting at:* **MONTEREY ST** **$7,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271333	MILANO LANE	NAPOLI ST	STADIUM RD	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111084	0.9 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
111085	23.1 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111086	30.0 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
111082	42.1 to 43.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
111087	45.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111088	56.3 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
111083	57.0 to 58.0 feet	**Vertical Change**	.65"	5 ft	5	REF		
111089	61.8 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: N *side of* **MILANO LANE** *Starting at:* **NAPOLI ST** **$21,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271430	MILANO LANE	POMPEI ST	ROMA COURT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111485	12.6 to 13.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
111486	18.8 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
111487	42.4 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
111488	57.3 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111489	62.9 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
111490	70.1 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
111491	83.2 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
111492	93.0 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
111493	99.8 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
111494	105.3 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
111495	121.7 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111484	122.3 to 123.3 feet	**Vertical Change**	.77"	5 ft	5	REF		
111496	129.5 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
111497	139.8 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
111498	148.9 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **MILANO LANE** *Starting at:* **POMPEI ST** **$44,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271356	MILANO LANE	POMPEI ST	MONTEREY ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111219	0.0 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
111220	13.3 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
111221	45.6 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111222	53.1 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
111223	67.3 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
111217	86.9 to 87.9 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
111224	91.3 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
111218	104.4 to 105.4 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
111225	109.3 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
111226	125.4 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
111227	141.9 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111228	150.4 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: S *side of* **MILANO LANE** *Starting at:* **POMPEI ST** **$67,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271437	MILANO LANE	ROMA COURT	LUCCA COURT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111545	1.3 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
111546	12.8 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111547	20.8 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
111548	34.7 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
111549	71.1 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
111541	78.1 to 79.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
111550	98.3 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
111542	99.2 to 102.8 feet	**Vertical Change**	-.26"	5 ft	18	REF		
111551	143.4 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111543	144.2 to 145.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
111552	152.7 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
111553	190.3 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: N *side of* **MILANO LANE** *Starting at:* **ROMA COURT** **$32,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271353	MILANO LANE	ROMA COURT	POMPEI ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111209	0.7 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111210	23.3 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
111211	71.9 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
111208	80.5 to 81.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
111212	91.1 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
111213	131.5 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
111214	140.8 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
111215	154.8 to 159.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
111216	163.0 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**

TOTAL COST FOR: S *side of* **MILANO LANE** *Starting at:* **ROMA COURT** **$51,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271340	MILANO LANE	STADIUM RD	ROMA COURT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111100	0.0 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
111101	13.9 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
111102	28.4 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111103	92.6 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
111104	100.2 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
111105	108.6 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111106	115.3 to 136.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,720**
111128	138.3 to 171.5 feet	Key Note Segment		5 ft	166			
111090	155.8 to 156.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
111107	172.8 to 178.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
111108	180.9 to 191.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
111091	186.7 to 187.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
111109	192.1 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,320**
111110	236.8 to 239.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
111092	238.3 to 239.3 feet	**Vertical Change**	3.42"	5 ft	5	REF		
111111	240.8 to 262.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
111112	264.8 to 271.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
111113	275.7 to 283.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
111114	285.1 to 286.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111115	289.1 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
111116	303.9 to 306.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
111117	306.4 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
111118	321.3 to 332.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
111119	332.0 to 336.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
111120	342.3 to 355.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
111121	355.8 to 389.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
111093	359.0 to 360.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111094	376.2 to 377.2 feet	**Vertical Change**	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271340	MILANO LANE	STADIUM RD	ROMA COURT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111129	392.8 to 425.5 feet	Key Note Segment		5 ft	164			
111095	393.3 to 394.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
111096	397.7 to 398.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
111097	409.8 to 410.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
111122	426.6 to 428.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
111123	431.0 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**
111124	463.6 to 496.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
111098	476.0 to 477.0 feet	**Vertical Change**	2.56"	5 ft	5	REF		
111099	488.1 to 489.1 feet	**Vertical Change**	.58"	5 ft	5	REF		
111125	513.9 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
111126	531.8 to 541.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
111127	545.6 to 558.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: S *side of* **MILANO LANE** *Starting at:* **STADIUM RD** **$206,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108121332	MILLVIEW DR	409 MILLVIEW DR	CLINTON ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60823	4.0 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
60824	13.7 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
60825	22.6 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
60836	28.6 to 43.3 feet	Key Note Segment		4 ft	59			
60826	44.1 to 45.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
60827	45.4 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
60828	62.6 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
60829	71.9 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,392**
60837	74.8 to 88.8 feet	Key Note Segment		4 ft	56			
60830	89.3 to 90.6 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	5	SF	$40	**$208**
60831	90.6 to 95.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	18	SF	$120	**$2,112**
60832	95.0 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,344**
60833	97.9 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
60834	102.3 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,312**
60821	118.8 to 119.8 feet	**Vertical Change**	-.5"	4 ft	4	REF		
60838	121.7 to 136.0 feet	Key Note Segment		4 ft	57			
60835	136.9 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
60822	139.6 to 140.6 feet	**Vertical Change**	.27"	4 ft	4	REF		

TOTAL COST FOR: NE *side of* **MILLVIEW DR** *Starting at:* **409 MILLVIEW DR** **$28,336.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108121330	MILLVIEW DR	425 MILLVIEW DR	409 MILLVIEW DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60803	0.0 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
60804	5.5 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
60817	8.8 to 22.8 feet	Key Note Segment		4 ft	56			
60795	9.1 to 10.1 feet	**Vertical Change**	-.27"	4 ft	4	REF		
60796	21.5 to 24.7 feet	**Vertical Change**	-.45"	4 ft	13	REF		
60805	24.7 to 26.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
60806	46.3 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
60797	50.0 to 51.0 feet	**Vertical Change**	-.55"	4 ft	4	REF		
60807	58.6 to 62.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
60808	64.7 to 67.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,392**
60818	67.8 to 82.8 feet	Key Note Segment		4 ft	60			
60798	81.1 to 82.1 feet	**Vertical Change**	.26"	4 ft	4	REF		
60809	85.7 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
60810	95.8 to 97.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
60811	97.6 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**
60819	112.9 to 127.1 feet	Key Note Segment		4 ft	57			
60800	126.0 to 127.0 feet	**Vertical Change**	-.32"	4 ft	4	REF		
60812	128.4 to 131.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
60813	131.1 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
60814	138.1 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
60815	142.4 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
60820	158.4 to 173.6 feet	Key Note Segment		4 ft	61			
60801	172.1 to 173.1 feet	**Vertical Change**	.32"	4 ft	4	REF		
60816	176.0 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	97	SF	$120	**$11,664**
60802	194.7 to 195.7 feet	**Vertical Change**	3.41"	4 ft	4	REF		

TOTAL COST FOR: NE *side of* **MILLVIEW DR** *Starting at:* **425 MILLVIEW DR** **$44,112.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121327	MILLVIEW DR	CLINTON ST	420 MILLVIEW DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60788	4.0 to 18.2 feet	Key Note Segment		4 ft	57			
60753	5.0 to 6.0 feet	Vertical Change	-.29"	4 ft	4	REF		
60754	16.4 to 17.4 feet	Vertical Change	-.28"	4 ft	4	REF		
60766	30.5 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
60767	34.7 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
60789	51.7 to 65.3 feet	Key Note Segment		4 ft	54			
60768	66.3 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
60769	67.8 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
60755	68.1 to 69.1 feet	Vertical Change	.26"	4 ft	4	REF		
60770	77.8 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
60756	82.2 to 83.2 feet	Vertical Change	-.3"	4 ft	4	REF		
60771	82.3 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
60790	98.0 to 111.4 feet	Key Note Segment		4 ft	54			
60757	99.9 to 100.9 feet	Vertical Change	.51"	4 ft	4	REF		
60772	112.4 to 114.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
60773	116.7 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
60774	127.6 to 131.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
60775	131.1 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**
60791	143.3 to 156.8 feet	Key Note Segment		4 ft	54			
60776	158.5 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
60777	176.9 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,712**
60792	189.3 to 202.8 feet	Key Note Segment		4 ft	54			
60758	204.4 to 205.4 feet	Vertical Change	-.32"	4 ft	4	LF	$75	**$300**
60778	206.6 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	**$6,576**
60779	220.9 to 225.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,400**
60780	232.6 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
60793	235.6 to 248.9 feet	Key Note Segment		4 ft	53			
60781	250.9 to 264.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121327	MILLVIEW DR	CLINTON ST	420 MILLVIEW DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60782	268.3 to 281.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	54	SF	$120	**$6,432**
60794	281.7 to 293.8 feet	Key Note Segment		4 ft	48			
60759	292.9 to 293.9 feet	**Vertical Change**	.28"	4 ft	4	REF		
60783	295.1 to 297.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
60760	297.9 to 298.9 feet	**Vertical Change**	-.35"	4 ft	4	REF		
60784	297.9 to 305.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
60761	303.8 to 304.8 feet	**Vertical Change**	.98"	4 ft	4	REF		
60762	307.9 to 308.9 feet	**Vertical Change**	.65"	4 ft	4	SF	$75	**$300**
60763	309.7 to 310.7 feet	**Vertical Change**	1.34"	4 ft	4	SF	$75	**$300**
60785	312.5 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
60764	315.9 to 316.9 feet	**Vertical Change**	.49"	4 ft	4	REF		
60786	316.9 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
60787	362.6 to 381.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	**$9,264**
60765	370.5 to 371.5 feet	**Vertical Change**	.31"	4 ft	4	REF		

TOTAL COST FOR: SW *side of* **MILLVIEW DR** *Starting at:* **CLINTON ST** **$77,076.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131024	MILOW ST	FRITZ ST	SOLANO ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61581	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
61582	3.7 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61583	9.7 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
61598	17.8 to 39.2 feet	Key Note Segment		5 ft	107			
61575	28.7 to 29.7 feet	**Vertical Change**	.45"	5 ft	5	REF		
61584	39.7 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
61576	55.4 to 56.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
61585	64.4 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
61599	69.9 to 91.1 feet	Key Note Segment		5 ft	106			
61586	91.8 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
61600	95.8 to 119.7 feet	Key Note Segment		5 ft	120			
61587	121.4 to 128.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
61577	128.4 to 129.4 feet	**Vertical Change**	.65"	5 ft	5	REF		
61588	131.1 to 148.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
61578	138.3 to 139.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
61589	148.7 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
61590	154.3 to 155.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
61591	155.6 to 166.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
61592	166.0 to 173.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
61601	173.5 to 194.8 feet	Key Note Segment		5 ft	107			
61593	196.8 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61602	199.8 to 221.1 feet	Key Note Segment		5 ft	107			
61594	221.5 to 225.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
61595	226.7 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
61596	235.3 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61580	238.4 to 239.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
61597	238.9 to 240.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: N *side of* **MILOW ST** *Starting at:* **FRITZ ST** **$58,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131009	MILOW ST	SOLANO ST	FRITZ ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61471	1.2 to 5.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
61472	5.6 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
61473	7.0 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61474	18.3 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
61486	22.1 to 43.3 feet	Key Note Segment		5 ft	106			
61466	33.2 to 34.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
61475	44.2 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61487	47.8 to 70.1 feet	Key Note Segment		5 ft	111			
61476	70.7 to 97.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,200**
61467	83.7 to 84.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
61477	100.0 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
61478	115.5 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
61488	123.3 to 144.8 feet	Key Note Segment		5 ft	108			
61479	147.0 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
61489	149.0 to 170.0 feet	Key Note Segment		5 ft	105			
61480	171.6 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
61481	184.8 to 199.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
61468	189.4 to 190.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
61490	199.3 to 221.3 feet	Key Note Segment		5 ft	110			
61469	210.5 to 211.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
61482	222.1 to 233.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
61483	235.8 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
61484	247.0 to 249.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
61485	252.7 to 255.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61491	266.1 to 289.9 feet	Key Note Segment		5 ft	119			
61470	279.1 to 280.1 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **MILOW ST** *Starting at:* **SOLANO ST** **$67,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110190949	MIRA LOMA WAY	SAN GABRIEL DR	TOZER ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72668	5.0 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
72669	13.2 to 22.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
72670	22.7 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
72667	43.2 to 44.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **MIRA LOMA WAY** *Starting at:* **SAN GABRIEL DR** **$16,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191027	MIRA LOMA WAY	TOZER ST	SAN GABRIEL DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72911	0.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
72912	10.7 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
72913	21.8 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
72914	41.3 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
72915	51.1 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: N *side of* **MIRA LOMA WAY** *Starting at:* **TOZER ST** **$16,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110220952	MITCHELL CT	GRANADA DR	2592 MITCHELL CT	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80514	0.4 to 5.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
80515	5.9 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
80516	20.8 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80513	23.2 to 24.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
80517	26.2 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
80518	30.5 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: S *side of* **MITCHELL CT** *Starting at:* **GRANADA DR** **$7,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251108	MODOC ST	DWYER AVE	SCHNOOR AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107896	0.4 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
107897	12.3 to 36.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	121	SF	$120	**$14,520**
107898	37.3 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
107899	54.3 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
107900	67.2 to 70.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
107901	72.8 to 80.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
107887	73.2 to 74.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
107902	81.3 to 99.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
107903	102.4 to 119.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
107929	120.0 to 142.4 feet	Key Note Segment		5 ft	112			
107888	130.3 to 131.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
107904	143.8 to 153.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
107905	153.7 to 156.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
107906	156.5 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
107907	172.4 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
107889	182.0 to 183.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
107908	182.8 to 188.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
107909	188.5 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
107910	204.8 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
107911	211.6 to 278.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	332	SF	$120	**$39,840**
107930	278.9 to 296.2 feet	Key Note Segment		5 ft	87			
107912	300.1 to 319.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
107890	319.7 to 320.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
107931	320.0 to 340.9 feet	Key Note Segment		5 ft	105			
107913	347.7 to 355.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
107914	355.5 to 360.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
107891	357.1 to 358.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
107915	360.1 to 361.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251108	MODOC ST	DWYER AVE	SCHNOOR AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107916	361.3 to 372.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,840**
107932	372.8 to 394.7 feet	Key Note Segment		5 ft	110			
107892	373.1 to 374.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
107917	395.8 to 396.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
107918	405.5 to 407.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
107919	410.7 to 422.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
107920	422.8 to 453.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,600**
107921	453.8 to 455.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
107933	456.9 to 486.4 feet	Key Note Segment		5 ft	148			
107893	471.3 to 472.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
107922	488.3 to 499.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
107923	501.9 to 508.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
107894	505.2 to 506.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
107924	508.6 to 513.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
107895	529.8 to 530.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
107925	531.4 to 566.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
107926	568.2 to 593.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,060**
107927	595.7 to 632.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,140**
107928	633.2 to 650.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,260**

TOTAL COST FOR: N *side of* **MODOC ST** *Starting at:* **DWYER AVE** **$279,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251100	MODOC ST	SCHNOOR AVE	1920 MODOC ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107882	0.5 to 69.9 feet	Key Note Segment		5 ft	347			
107847	14.4 to 15.4 feet	Vertical Change	-.3"	5 ft	5	REF		
107848	36.0 to 37.0 feet	Vertical Change	-.32"	5 ft	5	REF		
107859	71.9 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
107883	73.8 to 92.1 feet	Key Note Segment		5 ft	92			
107849	91.9 to 92.9 feet	Vertical Change	-.27"	5 ft	5	REF		
107860	93.1 to 96.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
107861	97.3 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
107850	113.4 to 114.4 feet	Vertical Change	.39"	5 ft	5	REF		
107862	116.3 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
107863	127.7 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
107864	134.8 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
107865	140.6 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
107886	142.3 to 143.3 feet	Continuous Width	24"	5 ft	5	SF	$120	**$600**
107851	162.9 to 163.9 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
107866	164.6 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
107852	177.7 to 178.7 feet	Vertical Change	2.86"	5 ft	5	SF	$75	**$375**
107867	181.0 to 182.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
107853	183.2 to 184.2 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
107868	184.8 to 186.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
107884	188.5 to 218.0 feet	Key Note Segment		5 ft	148			
107869	220.1 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
107870	230.7 to 236.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
107871	249.8 to 264.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
107854	266.0 to 267.0 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
107872	270.4 to 272.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
107873	274.8 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
107874	284.7 to 290.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251100	MODOC ST	SCHNOOR AVE	1920 MODOC ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107875	294.1 to 304.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
107876	314.8 to 319.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
107877	338.3 to 341.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
107878	356.1 to 361.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
107856	357.6 to 358.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
107857	364.0 to 365.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
107879	364.9 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
107858	367.1 to 368.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
107885	370.8 to 390.0 feet	Key Note Segment		5 ft	96			
107880	390.3 to 393.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
107881	393.7 to 395.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: S *side of* **MODOC ST** *Starting at:* **SCHNOOR AVE** **$74,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121042	MONARCH RD	ARDILLA DR	DOME AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60059	0.3 to 3.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
60060	3.9 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
60092	17.8 to 44.0 feet	Key Note Segment		5 ft	131			
60061	45.9 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
60062	60.9 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
60063	72.6 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
60093	75.8 to 96.3 feet	Key Note Segment		5 ft	103			
60050	76.1 to 77.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
60064	99.2 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
60094	101.3 to 130.3 feet	Key Note Segment		5 ft	145			
60065	166.9 to 178.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
60095	178.9 to 198.4 feet	Key Note Segment		5 ft	98			
60066	199.3 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
60096	205.7 to 234.1 feet	Key Note Segment		5 ft	142			
60067	234.8 to 247.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
60068	250.2 to 252.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
60051	251.2 to 252.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
60069	255.1 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
60070	263.3 to 266.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
60071	271.3 to 275.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
60097	275.8 to 301.0 feet	Key Note Segment		5 ft	126			
60052	276.2 to 277.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
60072	301.0 to 307.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
60098	308.8 to 335.5 feet	Key Note Segment		5 ft	134			
60053	320.4 to 321.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
60054	335.4 to 336.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
60073	336.8 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
60074	340.8 to 354.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121042	MONARCH RD	ARDILLA DR	DOME AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60075	354.9 to 362.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
60076	362.9 to 366.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
60077	371.5 to 379.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
60099	379.9 to 405.3 feet	Key Note Segment		5 ft	127			
60078	405.9 to 407.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
60079	410.8 to 412.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
60100	412.7 to 432.1 feet	Key Note Segment		5 ft	97			
60080	435.0 to 438.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
60081	439.6 to 460.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
60082	462.7 to 463.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
60083	466.7 to 474.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
60084	478.1 to 480.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
60101	480.7 to 509.5 feet	Key Note Segment		5 ft	144			
60085	509.9 to 511.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
60102	514.4 to 544.2 feet	Key Note Segment		5 ft	149			
60055	515.2 to 516.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
60086	546.3 to 567.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,660**
60087	570.7 to 576.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
60056	573.5 to 574.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
60088	576.0 to 583.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
60103	583.8 to 613.2 feet	Key Note Segment		5 ft	147			
60089	614.2 to 618.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
60104	618.2 to 646.3 feet	Key Note Segment		5 ft	140			
60057	632.1 to 633.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
60090	646.3 to 662.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	80	SF	$40	**$3,200**
60058	655.7 to 656.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
60091	663.7 to 665.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: E *side of* **MONARCH RD** *Starting at:* **ARDILLA DR** **$129,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121036	MONARCH RD	DOME AVE	ARDILLA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60014	0.0 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
60003	0.9 to 1.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
60015	12.3 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
60036	15.3 to 43.3 feet	Key Note Segment		5 ft	140			
60004	15.4 to 16.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
60016	43.8 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
60037	48.3 to 76.8 feet	Key Note Segment		5 ft	143			
60017	77.8 to 83.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
60018	85.3 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
60005	94.6 to 95.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
60038	118.2 to 146.8 feet	Key Note Segment		5 ft	143			
60019	146.8 to 152.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	26	SF	$40	**$1,060**
60039	154.7 to 172.8 feet	Key Note Segment		5 ft	91			
60006	162.2 to 163.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
60020	173.4 to 175.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
60021	178.3 to 184.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
60022	189.8 to 197.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
60023	204.0 to 220.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
60007	207.6 to 210.4 feet	**Vertical Change**	.27"	5 ft	14	REF		
60040	222.0 to 250.2 feet	Key Note Segment		5 ft	141			
60024	250.9 to 255.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
60041	255.3 to 281.9 feet	Key Note Segment		5 ft	133			
60025	290.3 to 333.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	216	SF	$120	**$25,920**
60009	321.5 to 322.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
60042	333.5 to 352.8 feet	Key Note Segment		5 ft	97			
60043	358.3 to 385.4 feet	Key Note Segment		5 ft	136			
60026	385.9 to 388.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
60027	390.3 to 414.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121036	MONARCH RD	DOME AVE	ARDILLA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60028	416.7 to 417.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
60029	421.3 to 426.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
60044	429.0 to 455.8 feet	Key Note Segment		5 ft	134			
60045	461.8 to 489.1 feet	Key Note Segment		5 ft	137			
60010	465.0 to 466.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
60030	493.9 to 505.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
60031	514.9 to 520.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
60032	523.9 to 532.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
60046	532.5 to 558.3 feet	Key Note Segment		5 ft	129			
60047	563.5 to 588.5 feet	Key Note Segment		5 ft	125			
60012	568.3 to 569.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
60033	589.2 to 598.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
60048	598.4 to 611.9 feet	Key Note Segment		5 ft	68			
60049	614.0 to 639.8 feet	Key Note Segment		5 ft	129			
60034	641.8 to 648.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
60035	655.8 to 662.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
60013	660.9 to 661.9 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONARCH RD** *Starting at:* **DOME AVE** **$131,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160757	MONOCOTT DR	2704 MONOCOTT DR	N GRANADA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68457	2.6 to 3.6 feet	Vertical Change	-.78"	5 ft	5	SF	$75	$375
68499	6.0 to 7.1 feet		5.0-6.0%	5 ft	6			
68469	7.3 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
68458	11.3 to 12.3 feet	Vertical Change	.49"	5 ft	5	REF		
68459	19.6 to 20.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
68470	25.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
68460	32.7 to 33.7 feet	Vertical Change	.51"	5 ft	5	SF	$75	$375
68493	61.9 to 76.1 feet	Key Note Segment		5 ft	71			
68461	63.3 to 64.3 feet	Vertical Change	-.45"	5 ft	5	REF		
68471	80.4 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
68462	85.2 to 86.2 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
68472	87.0 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
68473	104.6 to 109.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
68474	110.0 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
68475	114.0 to 119.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	$3,540
68494	120.2 to 134.3 feet	Key Note Segment		5 ft	71			
68463	130.8 to 131.8 feet	Vertical Change	-.92"	5 ft	5	REF		
68476	136.3 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
68477	162.2 to 167.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
68495	168.4 to 182.8 feet	Key Note Segment		5 ft	72			
68464	170.4 to 171.4 feet	Vertical Change	.48"	5 ft	5	REF		
68465	183.5 to 184.5 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
68478	199.6 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	$15,960
68466	203.0 to 204.0 feet	Vertical Change	-.39"	5 ft	5	REF		
68496	226.2 to 241.8 feet	Key Note Segment		5 ft	78			
68479	241.8 to 245.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$700
68480	247.2 to 249.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500
68481	250.4 to 251.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160757	MONOCOTT DR	2704 MONOCOTT DR	N GRANADA DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68467	250.7 to 251.7 feet	Vertical Change	-.48"	5 ft	5	REF		
68482	251.6 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
68483	274.8 to 279.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
68497	281.8 to 299.5 feet	Key Note Segment		5 ft	89			
68484	306.8 to 317.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
68485	320.4 to 326.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
68486	326.8 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
68498	332.8 to 346.3 feet	Key Note Segment		5 ft	68			
68487	346.4 to 351.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	**$920**
68488	351.3 to 386.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
68489	395.7 to 396.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68490	397.8 to 401.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
68491	403.3 to 420.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
68468	422.0 to 423.0 feet	Vertical Change	-.41"	5 ft	5	LF	$75	**$375**
68492	426.0 to 428.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
68500	428.1 to 429.1 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **MONOCOTT DR** *Starting at:* **2704 MONOCOTT DR** **$116,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160944	MONOCOTT DR	DRIFTWOOD DR	PINEWOOD DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69821	18.5 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
69822	68.3 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
69823	83.8 to 89.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
69824	89.2 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
69825	115.0 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
69826	124.6 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
69827	144.0 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**

TOTAL COST FOR: E *side of* **MONOCOTT DR** *Starting at:* **DRIFTWOOD DR** **$63,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160940	MONOCOTT DR	GRANADA DR	GREENWOOD DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69684	18.1 to 19.1 feet	Vertical Change	-.42"	5 ft	5	REF		
69716	18.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
69685	31.1 to 32.1 feet	Vertical Change	-.26"	5 ft	5	REF		
69717	33.7 to 38.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
69718	38.4 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
69719	57.6 to 61.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
69720	64.3 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
69721	73.3 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
69686	82.9 to 83.9 feet	Vertical Change	-.27"	5 ft	5	REF		
69722	83.1 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69723	88.7 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69777	90.8 to 104.6 feet	Key Note Segment		5 ft	69			
69724	104.6 to 106.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
69725	114.7 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
69687	123.8 to 124.8 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
69726	127.4 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
69688	136.2 to 137.2 feet	Vertical Change	-.66"	5 ft	5	REF		
69778	161.6 to 175.6 feet	Key Note Segment		5 ft	70			
69727	177.7 to 182.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
69728	182.5 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
69689	189.1 to 190.1 feet	Vertical Change	-.28"	5 ft	5	REF		
69729	197.0 to 200.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
69730	200.9 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69690	206.5 to 207.5 feet	Vertical Change	.56"	5 ft	5	SF	$75	**$375**
69731	210.0 to 213.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
69779	214.7 to 227.4 feet	Key Note Segment		5 ft	64			
69732	240.0 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
69733	247.2 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160940	MONOCOTT DR	GRANADA DR	GREENWOOD DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69734	266.1 to 268.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69735	279.3 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
69780	289.1 to 302.7 feet	Key Note Segment		5 ft	68			
69736	303.3 to 306.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
69781	318.8 to 333.5 feet	Key Note Segment		5 ft	74			
69691	346.7 to 349.6 feet	**Vertical Change**	-.28"	5 ft	15	LF	$75	**$1,088**
69737	359.8 to 364.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
69738	366.9 to 368.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
69782	368.3 to 381.8 feet	Key Note Segment		5 ft	68			
69692	389.8 to 390.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
69739	406.2 to 415.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
69740	419.9 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69783	424.3 to 438.7 feet	Key Note Segment		5 ft	72			
69693	425.5 to 426.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
69694	439.3 to 440.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
69695	469.1 to 470.1 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
69784	472.4 to 487.5 feet	Key Note Segment		5 ft	76			
69741	488.6 to 499.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
69742	502.4 to 506.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
69743	508.8 to 514.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
69696	521.3 to 522.3 feet	**Vertical Change**	.81"	5 ft	5	SF	$75	**$375**
69697	525.0 to 526.0 feet	**Vertical Change**	1.16"	5 ft	5	SF	$75	**$375**
69744	526.7 to 535.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	42	SF	$120	**$5,040**
69698	532.6 to 533.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
69699	538.4 to 542.1 feet	**Vertical Change**	.44"	5 ft	19	LF	$75	**$1,388**
69700	545.6 to 546.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
69793	548.0 to 550.1 feet		8.0-9.0%	5 ft	11			
69701	550.2 to 551.2 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160940	MONOCOTT DR	GRANADA DR	GREENWOOD DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69745	551.1 to 552.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69785	552.4 to 562.9 feet	Key Note Segment		5 ft	53			
69746	562.9 to 564.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
69747	566.8 to 574.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
69786	582.2 to 595.8 feet	Key Note Segment		5 ft	68			
69702	583.4 to 584.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
69748	597.9 to 612.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
69703	608.4 to 609.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
69749	618.5 to 627.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
69704	626.5 to 627.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
69705	634.2 to 635.2 feet	**Vertical Change**	-.42"	5 ft	5	REF		
69750	635.1 to 641.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
69751	648.2 to 654.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,660**
69706	648.5 to 649.5 feet	**Vertical Change**	.71"	5 ft	5	REF		
69794	652.3 to 653.3 feet		5.0-6.0%	5 ft	5			
69795	653.3 to 655.2 feet		6.0-7.0%	5 ft	10			
69787	655.7 to 683.5 feet	Key Note Segment		5 ft	139			
69707	656.9 to 657.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
69752	685.0 to 687.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
69788	687.8 to 697.3 feet	Key Note Segment		5 ft	48			
69753	697.3 to 723.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	132	SF	$40	**$5,280**
69708	698.6 to 699.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
69754	724.3 to 732.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
69709	732.1 to 733.1 feet	**Vertical Change**	-.62"	5 ft	5	REF		
69755	733.1 to 734.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
69756	734.2 to 739.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
69789	739.1 to 752.8 feet	Key Note Segment		5 ft	69			
69757	753.8 to 757.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160940	MONOCOTT DR	GRANADA DR	GREENWOOD DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69758	760.4 to 775.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
69759	779.4 to 802.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
69760	806.4 to 814.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
69790	814.7 to 829.6 feet	Key Note Segment		5 ft	75			
69761	830.1 to 835.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	26	SF	$40	**$1,040**
69710	836.8 to 837.8 feet	Vertical Change	2.13"	5 ft	5	SF	$75	**$375**
69762	844.4 to 847.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69711	850.1 to 851.1 feet	Vertical Change	.67"	5 ft	5	SF	$75	**$375**
69763	854.2 to 857.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
69712	857.1 to 858.1 feet	Vertical Change	.5"	5 ft	5	REF		
69791	865.1 to 882.6 feet	Key Note Segment		5 ft	88			
69764	883.8 to 887.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
69765	890.4 to 900.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
69713	897.7 to 898.7 feet	Vertical Change	.28"	5 ft	5	REF		
69766	902.8 to 914.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
69767	915.2 to 917.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69768	921.3 to 926.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
69792	927.3 to 940.5 feet	Key Note Segment		5 ft	66			
69769	940.5 to 961.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	106	SF	$40	**$4,220**
69714	943.0 to 944.0 feet	Vertical Change	.29"	5 ft	5	REF		
69715	963.2 to 964.2 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**
69770	968.7 to 984.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
69771	987.5 to 990.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
69772	993.1 to 1007.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
69773	1008.4 to 1011.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
69774	1013.5 to 1018.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
69775	1018.6 to 1035.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	86	SF	$120	**$10,260**
69776	1035.7 to 1037.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160940	MONOCOTT DR	GRANADA DR	GREENWOOD DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E		*side of* **MONOCOTT DR**	*Starting at:* **GRANADA DR**					**$249,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160942	MONOCOTT DR	GREENWOOD DR	DRIFTWOOD DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69804	0.7 to 10.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
69796	9.3 to 10.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
69805	13.3 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
69806	18.7 to 26.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
69807	26.7 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
69808	37.8 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
69819	45.3 to 58.9 feet	Key Note Segment		5 ft	68			
69797	60.0 to 63.3 feet	**Vertical Change**	.42"	5 ft	17	LF	$75	**$1,238**
69809	62.9 to 64.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
69810	66.6 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
69811	73.8 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
69798	74.4 to 75.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
69799	77.9 to 78.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
69812	83.3 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
69813	88.6 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
69800	104.7 to 105.7 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
69814	110.2 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
69801	126.9 to 127.9 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
69802	144.6 to 145.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
69815	156.7 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
69803	163.2 to 164.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
69816	164.5 to 166.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
69817	166.6 to 170.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
69820	169.1 to 170.2 feet		5.0-6.0%	5 ft	6			
69818	170.3 to 171.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **MONOCOTT DR** *Starting at:* **GREENWOOD DR** **$48,532.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160946	MONOCOTT DR	PINEWOOD DR	RIVERVIEW DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69834	0.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
69835	5.7 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
69836	9.3 to 14.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
69837	18.3 to 70.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	262	SF	$120	**$31,440**
69828	59.4 to 60.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
69829	72.3 to 73.3 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
69838	75.8 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
69839	81.3 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69840	88.5 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
69830	100.8 to 101.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
69841	104.4 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
69842	107.4 to 115.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
69831	116.5 to 117.5 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
69843	119.6 to 133.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
69844	137.8 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
69832	147.5 to 148.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
69845	150.1 to 158.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
69833	158.7 to 159.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **MONOCOTT DR** *Starting at:* **PINEWOOD DR** **$75,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68353	0.0 to 6.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
68354	8.9 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
68355	15.9 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
68433	34.1 to 49.3 feet	Key Note Segment		5 ft	76			
68312	72.5 to 73.5 feet	**Vertical Change**	-.78"	5 ft	5	SF	$75	**$375**
68356	82.2 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
68434	87.8 to 102.1 feet	Key Note Segment		5 ft	72			
68313	88.3 to 89.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
68314	100.5 to 101.5 feet	**Vertical Change**	1.75"	5 ft	5	REF		
68357	102.3 to 103.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
68315	107.1 to 108.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
68358	108.1 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
68316	113.5 to 114.5 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
68317	115.2 to 116.2 feet	**Vertical Change**	.82"	5 ft	5	SF	$75	**$375**
68435	118.9 to 131.3 feet	Key Note Segment		5 ft	62			
68359	133.6 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
68360	168.8 to 172.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
68318	169.7 to 170.7 feet	**Vertical Change**	1.9"	5 ft	5	REF		
68361	172.7 to 174.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68362	177.7 to 180.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
68319	182.5 to 183.5 feet	**Vertical Change**	-.67"	5 ft	5	SF	$75	**$375**
68320	186.9 to 187.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
68363	187.0 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68364	191.8 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
68365	199.8 to 203.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
68436	203.2 to 216.9 feet	Key Note Segment		5 ft	69			
68366	220.9 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
68321	225.2 to 226.2 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68367	228.6 to 241.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
68322	229.4 to 230.4 feet	Vertical Change	-.27"	5 ft	5	REF		
68368	246.1 to 259.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
68323	246.9 to 247.9 feet	Vertical Change	.28"	5 ft	5	REF		
68437	259.0 to 272.9 feet	Key Note Segment		5 ft	69			
68369	272.9 to 277.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	**$940**
68370	282.1 to 288.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
68324	283.7 to 284.7 feet	Vertical Change	.3"	5 ft	5	REF		
68325	286.9 to 287.9 feet	Vertical Change	1.65"	5 ft	5	REF		
68438	289.8 to 303.1 feet	Key Note Segment		5 ft	67			
68371	303.4 to 355.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	262	SF	$40	**$10,480**
68326	304.4 to 305.4 feet	Vertical Change	.26"	5 ft	5	REF		
68372	356.1 to 367.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
68327	361.0 to 362.0 feet	Vertical Change	.38"	5 ft	5	REF		
68439	367.2 to 382.8 feet	Key Note Segment		5 ft	78			
68328	383.1 to 384.1 feet	Vertical Change	.28"	5 ft	5	REF		
68373	387.0 to 389.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
68374	392.6 to 395.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
68375	400.6 to 403.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
68376	408.3 to 425.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
68440	425.8 to 440.2 feet	Key Note Segment		5 ft	72			
68329	427.0 to 428.0 feet	Vertical Change	.38"	5 ft	5	REF		
68330	448.3 to 449.3 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
68377	449.8 to 451.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
68441	458.2 to 471.8 feet	Key Note Segment		5 ft	68			
68331	458.7 to 459.7 feet	Vertical Change	-1.04"	5 ft	5	REF		
68378	471.8 to 483.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
68332	472.5 to 473.5 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68379	487.0 to 490.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
68380	496.8 to 498.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
68381	501.2 to 513.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
68442	513.9 to 527.6 feet	Key Note Segment		5 ft	69			
68382	528.6 to 547.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
68333	528.8 to 529.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
68334	537.1 to 538.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
68335	539.7 to 540.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
68336	541.8 to 542.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
68383	551.2 to 555.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
68337	554.0 to 555.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
68384	555.3 to 561.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
68385	561.4 to 565.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
68443	565.6 to 580.3 feet	Key Note Segment		5 ft	73			
68338	579.4 to 580.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
68339	586.0 to 587.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
68340	589.7 to 590.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
68386	601.8 to 611.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
68341	607.9 to 608.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
68387	617.5 to 620.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
68444	620.5 to 635.4 feet	Key Note Segment		5 ft	75			
68388	636.2 to 657.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,540**
68342	653.4 to 654.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
68389	657.3 to 658.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
68390	660.8 to 668.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
68343	671.9 to 672.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
68391	675.2 to 678.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
68392	679.1 to 694.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68445	695.6 to 710.0 feet	Key Note Segment		5 ft	72			
68393	710.6 to 711.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
68394	715.0 to 718.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
68446	720.1 to 734.3 feet	Key Note Segment		5 ft	71			
68395	735.4 to 774.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,340**
68447	774.3 to 787.3 feet	Key Note Segment		5 ft	65			
68396	787.6 to 789.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
68397	791.9 to 794.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
68344	805.8 to 806.8 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
68398	822.6 to 827.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
68448	827.7 to 841.2 feet	Key Note Segment		5 ft	68			
68399	844.1 to 896.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	262	SF	$120	**$31,440**
68400	897.3 to 899.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68449	900.6 to 913.8 feet	Key Note Segment		5 ft	66			
68345	914.8 to 915.8 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
68401	918.4 to 923.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
68402	930.4 to 937.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
68450	937.0 to 951.2 feet	Key Note Segment		5 ft	71			
68403	952.7 to 955.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
68404	958.7 to 960.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
68405	963.8 to 979.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
68406	979.8 to 983.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
68407	984.0 to 985.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
68408	985.8 to 987.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
68346	986.9 to 987.9 feet	**Vertical Change**	1.37"	5 ft	5	REF		
68409	988.1 to 991.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
68410	993.9 to 997.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
68411	998.9 to 1004.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68412	1006.0 to 1012.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
68451	1012.3 to 1026.8 feet	Key Note Segment		5 ft	73			
68413	1026.8 to 1033.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	32	SF	$40	**$1,280**
68414	1033.4 to 1038.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
68415	1038.9 to 1046.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
68452	1046.3 to 1061.1 feet	Key Note Segment		5 ft	74			
68416	1061.1 to 1073.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	61	SF	$40	**$2,440**
68417	1073.3 to 1082.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
68418	1083.0 to 1088.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
68419	1088.8 to 1090.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
68420	1093.9 to 1112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
68347	1105.4 to 1106.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
68421	1118.9 to 1122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
68453	1122.8 to 1136.8 feet	Key Note Segment		5 ft	70			
68422	1136.8 to 1140.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$660**
68348	1138.1 to 1139.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
68423	1140.8 to 1153.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
68424	1154.4 to 1156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
68454	1158.5 to 1172.3 feet	Key Note Segment		5 ft	69			
68425	1173.6 to 1184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
68426	1185.1 to 1187.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
68427	1191.4 to 1197.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
68428	1206.3 to 1207.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68429	1220.3 to 1221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68430	1223.3 to 1229.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
68431	1229.8 to 1235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
68455	1237.4 to 1253.7 feet	Key Note Segment		5 ft	81			
68349	1238.8 to 1239.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160753	MONOCOTT DR	RIVERVIEW DR	N GRANADA DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68432	1253.7 to 1255.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
68456	1269.3 to 1335.7 feet	Key Note Segment		5 ft	332			
68350	1280.0 to 1281.0 feet	Vertical Change	.54"	5 ft	5	REF		
68351	1302.2 to 1303.2 feet	Vertical Change	.56"	5 ft	5	REF		
68352	1313.7 to 1314.7 feet	Vertical Change	-.6"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONOCOTT DR** *Starting at:* **RIVERVIEW DR** **$348,265.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081409	MONROE AVE	1770 MONROE AVE	PIERCE LN	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127058	0.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
127059	5.5 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
127060	18.4 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
127061	20.5 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
127052	24.0 to 25.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
127053	41.3 to 42.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
127066	48.8 to 68.3 feet	Key Note Segment		5 ft	98			
127062	70.6 to 71.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
127063	72.1 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
127067	75.4 to 95.2 feet	Key Note Segment		5 ft	99			
127054	94.1 to 95.1 feet	**Vertical Change**	.96"	5 ft	5	REF		
127064	96.8 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
127055	110.5 to 111.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
127068	127.6 to 146.2 feet	Key Note Segment		5 ft	93			
127056	140.3 to 141.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
127065	147.7 to 169.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
127057	169.9 to 170.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **MONROE AVE** *Starting at:* **1770 MONROE AVE** **$57,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081407	MONROE AVE	1818 MONROE AVE	1770 MONROE AVE	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127038	0.0 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
127033	4.4 to 5.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
127039	10.7 to 56.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	227	SF	$40	**$9,080**
127048	56.2 to 75.3 feet	Key Note Segment		5 ft	96			
127040	77.3 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
127049	82.7 to 102.3 feet	Key Note Segment		5 ft	98			
127041	103.8 to 108.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
127042	108.9 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
127043	127.0 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
127044	146.7 to 152.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
127045	152.2 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
127050	159.8 to 179.0 feet	Key Note Segment		5 ft	96			
127036	160.0 to 161.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
127046	180.5 to 185.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
127051	186.4 to 204.5 feet	Key Note Segment		5 ft	91			
127037	198.8 to 199.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
127047	207.1 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **MONROE AVE** *Starting at:* **1818 MONROE AVE** **$52,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081405	MONROE AVE	1830 MONROE AVE	1830 MONROE AVE	16

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127032	0.8 to 14.9 feet	Key Note Segment		5 ft	71			
127029	3.8 to 4.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
127030	16.3 to 17.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
127031	16.5 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: W *side of* **MONROE AVE** *Starting at:* **1830 MONROE AVE** **$2,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081403	MONROE AVE	EISENHOWER LN	1830 MONROE AVE	19

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127025	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
127026	3.8 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
127027	18.3 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
127028	21.3 to 22.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **MONROE AVE** *Starting at:* **EISENHOWER LN** **$11,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081233	MONROE AVE	HOOVER AVE	TYLER LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126471	2.5 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
126472	5.3 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
126473	10.9 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
126495	21.1 to 39.4 feet	Key Note Segment		5 ft	92			
126458	39.8 to 40.8 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
126474	42.0 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
126496	47.1 to 65.8 feet	Key Note Segment		5 ft	94			
126459	59.8 to 60.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
126475	69.5 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
126476	77.8 to 83.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
126477	83.0 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,620**
126478	111.6 to 124.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
126497	126.7 to 145.2 feet	Key Note Segment		5 ft	92			
126460	126.8 to 127.8 feet	**Vertical Change**	.46"	5 ft	5	REF		
126498	152.8 to 170.8 feet	Key Note Segment		5 ft	90			
126461	165.1 to 166.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
126479	172.5 to 173.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126480	176.8 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
126481	200.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
126482	206.5 to 231.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
126499	231.7 to 250.8 feet	Key Note Segment		5 ft	96			
126463	231.9 to 232.9 feet	**Vertical Change**	.6"	5 ft	5	REF		
126464	251.0 to 252.0 feet	**Vertical Change**	-.47"	5 ft	5	REF		
126483	252.7 to 253.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
126500	257.9 to 277.3 feet	Key Note Segment		5 ft	97			
126484	281.3 to 299.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
126465	299.0 to 300.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
126485	299.6 to 304.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081233	MONROE AVE	HOOVER AVE	TYLER LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126486	304.3 to 305.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
126487	308.2 to 310.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
126488	315.3 to 331.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
126489	333.9 to 336.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
126501	337.8 to 356.2 feet	Key Note Segment		5 ft	92			
126466	339.4 to 340.4 feet	**Vertical Change**	4.3"	5 ft	5	REF		
126467	343.9 to 344.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126490	359.1 to 361.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
126491	361.8 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126468	362.8 to 363.8 feet	**Vertical Change**	3.08"	5 ft	5	REF		
126502	363.3 to 382.0 feet	Key Note Segment		5 ft	94			
126492	383.5 to 390.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
126493	390.8 to 412.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
126503	415.4 to 434.7 feet	Key Note Segment		5 ft	97			
126494	438.5 to 460.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
126469	443.9 to 444.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
126470	460.2 to 461.2 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONROE AVE** *Starting at:* **HOOVER AVE** **$126,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081413	MONROE AVE	PIERCE LN	EISENHOWER LN	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127076	0.6 to 7.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
127077	8.0 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
127097	22.8 to 41.4 feet	Key Note Segment		5 ft	93			
127069	29.6 to 30.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
127078	43.3 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
127079	51.8 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
127080	71.5 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
127098	73.7 to 92.9 feet	Key Note Segment		5 ft	96			
127070	93.1 to 94.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
127081	96.8 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
127071	100.1 to 101.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
127099	100.1 to 118.8 feet	Key Note Segment		5 ft	94			
127082	132.0 to 155.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
127083	157.3 to 175.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
127100	177.4 to 196.5 feet	Key Note Segment		5 ft	96			
127072	177.9 to 178.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
127073	190.4 to 191.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
127084	200.3 to 202.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
127101	204.0 to 221.4 feet	Key Note Segment		5 ft	87			
127085	223.8 to 228.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
127086	228.9 to 281.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	263	SF	$120	**$31,560**
127102	281.5 to 299.8 feet	Key Note Segment		5 ft	92			
127074	299.6 to 300.6 feet	**Vertical Change**	1.45"	5 ft	5	REF		
127106	299.8 to 300.9 feet		5.0-6.0%	5 ft	5			
127087	301.3 to 302.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
127088	303.3 to 305.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
127103	307.4 to 325.7 feet	Key Note Segment		5 ft	92			
127089	327.6 to 340.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081413	MONROE AVE	PIERCE LN	EISENHOWER LN	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127090	341.8 to 349.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
127091	354.4 to 369.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
127092	369.8 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
127104	385.2 to 403.8 feet	Key Note Segment		5 ft	93			
127075	391.3 to 392.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
127093	407.1 to 408.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
127094	408.6 to 409.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
127105	410.8 to 429.3 feet	Key Note Segment		5 ft	93			
127095	433.4 to 455.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,440**
127096	455.8 to 457.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: E *side of* **MONROE AVE** *Starting at:* **PIERCE LN** **$137,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081238	MONROE AVE	TYLER LN	HOOVER AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126525	0.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
126526	7.6 to 22.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
126546	25.6 to 44.4 feet	Key Note Segment		5 ft	94			
126504	25.7 to 26.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
126527	46.2 to 55.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
126505	47.2 to 48.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
126528	58.1 to 76.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,920**
126547	78.6 to 96.8 feet	Key Note Segment		5 ft	91			
126529	98.8 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
126530	100.8 to 104.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
126548	105.2 to 122.8 feet	Key Note Segment		5 ft	88			
126507	117.4 to 118.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
126508	123.2 to 124.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
126531	128.6 to 135.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
126532	135.0 to 165.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	151	SF	$120	**$18,120**
126533	166.7 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
126549	184.8 to 201.6 feet	Key Note Segment		5 ft	84			
126509	189.9 to 190.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
126510	202.4 to 203.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
126511	209.5 to 210.5 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
126550	209.5 to 228.0 feet	Key Note Segment		5 ft	93			
126512	216.2 to 217.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
126513	228.6 to 229.6 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
126534	232.8 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
126514	245.9 to 246.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
126535	250.0 to 252.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
126536	255.9 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
126551	289.1 to 307.9 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081238	MONROE AVE	TYLER LN	HOOVER AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126537	309.8 to 310.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
126538	311.1 to 315.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
126552	315.1 to 333.8 feet	Key Note Segment		5 ft	93			
126515	327.5 to 328.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
126516	338.0 to 339.0 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
126539	339.6 to 348.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
126540	353.6 to 370.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
126517	355.4 to 356.4 feet	**Vertical Change**	.68"	5 ft	5	REF		
126541	375.9 to 386.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
126542	389.5 to 394.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
126518	391.0 to 392.0 feet	**Vertical Change**	.67"	5 ft	5	REF		
126519	394.6 to 395.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
126553	394.7 to 412.8 feet	Key Note Segment		5 ft	91			
126520	407.2 to 408.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
126521	413.3 to 414.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
126543	416.0 to 417.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
126554	421.8 to 438.9 feet	Key Note Segment		5 ft	86			
126522	426.9 to 427.9 feet	**Vertical Change**	-.4"	5 ft	5	REF		
126524	439.5 to 440.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
126544	441.5 to 450.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
126545	450.3 to 465.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	75	SF	$120	**$9,000**

TOTAL COST FOR: E *side of* **MONROE AVE** *Starting at:* **TYLER LN** **$130,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201614	MONTEREY DR	GARY LN	MADRID LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77823	2.6 to 3.6 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
77830	3.9 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,440
77831	24.7 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
77857	28.6 to 43.0 feet	Key Note Segment		5 ft	72			
77832	44.3 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
77858	56.0 to 69.7 feet	Key Note Segment		5 ft	69			
77833	70.4 to 72.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$320
77834	75.4 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,540
77835	96.5 to 98.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
77824	101.3 to 102.3 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
77836	104.7 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
77837	109.8 to 115.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
77838	126.4 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
77859	129.7 to 144.2 feet	Key Note Segment		5 ft	73			
77825	144.1 to 145.1 feet	Vertical Change	.36"	5 ft	5	REF		
77839	148.0 to 155.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
77860	155.2 to 169.7 feet	Key Note Segment		5 ft	73			
77840	169.7 to 171.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$320
77841	172.3 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
77842	181.7 to 198.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	$10,200
77843	201.2 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,560
77826	201.8 to 202.8 feet	Vertical Change	-.29"	5 ft	5	REF		
77844	213.8 to 224.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	$6,660
77827	223.2 to 224.2 feet	Vertical Change	-.61"	5 ft	5	REF		
77845	229.3 to 232.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
77861	232.3 to 246.3 feet	Key Note Segment		5 ft	70			
77846	246.8 to 256.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	$5,520
77847	256.0 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201614	MONTEREY DR	GARY LN	MADRID LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77862	258.1 to 272.8 feet	Key Note Segment		5 ft	73			
77848	272.8 to 295.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	112	SF	$40	$4,460
77849	295.1 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	$13,320
77828	299.9 to 300.9 feet	Vertical Change	.27"	5 ft	5	REF		
77850	318.4 to 322.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,640
77851	322.8 to 326.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
77852	331.0 to 332.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
77863	333.6 to 348.1 feet	Key Note Segment		5 ft	73			
77829	334.5 to 335.5 feet	Vertical Change	-.78"	5 ft	5	REF		
77853	348.1 to 352.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	23	SF	$40	$920
77854	354.4 to 359.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
77864	359.1 to 373.2 feet	Key Note Segment		5 ft	71			
77855	373.2 to 375.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$400
77856	376.0 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580

TOTAL COST FOR: E *side of* **MONTEREY DR** *Starting at:* **GARY LN** **$103,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281519	MONTEREY DR	GARY LN	MILANO LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113398	8.8 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,500**
113376	14.3 to 15.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
113377	20.2 to 21.2 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
113422	21.6 to 40.9 feet	Key Note Segment		5 ft	97			
113378	31.5 to 32.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
113379	42.8 to 43.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
113399	43.2 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
113380	47.9 to 48.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
113423	50.1 to 69.3 feet	Key Note Segment		5 ft	96			
113400	70.8 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
113381	72.1 to 73.1 feet	**Vertical Change**	-.51"	5 ft	5	REF		
113401	73.8 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
113402	81.5 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
113383	82.4 to 83.4 feet	**Vertical Change**	.58"	5 ft	5	REF		
113384	94.0 to 95.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
113403	101.0 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
113404	109.9 to 113.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
113405	113.8 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
113424	125.4 to 146.4 feet	Key Note Segment		5 ft	105			
113406	151.4 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
113425	154.9 to 173.8 feet	Key Note Segment		5 ft	95			
113386	176.3 to 177.3 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
113407	178.9 to 183.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
113387	191.2 to 192.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
113408	198.5 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
113409	206.8 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
113410	224.3 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
113426	232.3 to 251.3 feet	Key Note Segment		5 ft	95			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281519	MONTEREY DR	GARY LN	MILANO LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113388	242.3 to 243.3 feet	Vertical Change	.32"	5 ft	5	REF		
113389	249.1 to 250.1 feet	Vertical Change	.39"	5 ft	5	REF		
113411	256.5 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
113427	259.8 to 279.2 feet	Key Note Segment		5 ft	97			
113412	279.7 to 280.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
113390	284.2 to 285.2 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
113391	303.6 to 304.6 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
113413	311.3 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
113414	320.3 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
113392	335.0 to 336.0 feet	Vertical Change	.3"	5 ft	5	REF		
113428	337.3 to 357.1 feet	Key Note Segment		5 ft	99			
113415	359.1 to 365.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
113393	363.7 to 364.7 feet	Vertical Change	.4"	5 ft	5	REF		
113429	365.8 to 385.3 feet	Key Note Segment		5 ft	98			
113394	387.5 to 388.5 feet	Vertical Change	.29"	5 ft	5	REF		
113416	387.7 to 393.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
113417	395.7 to 412.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
113395	408.7 to 409.7 feet	Vertical Change	.28"	5 ft	5	REF		
113418	415.6 to 442.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
113396	439.8 to 440.8 feet	Vertical Change	.37"	5 ft	5	REF		
113430	442.8 to 461.8 feet	Key Note Segment		5 ft	95			
113419	463.8 to 466.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
113431	471.5 to 490.2 feet	Key Note Segment		5 ft	94			
113420	491.4 to 493.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
113421	499.3 to 511.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
113397	501.1 to 502.1 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONTEREY DR** *Starting at:* **GARY LN** **$103,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281526	MONTEREY DR	HELENA WAY	GARY LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113451	1.4 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
113491	26.8 to 41.3 feet	Key Note Segment		5 ft	73			
113452	41.3 to 43.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$420**
113453	47.2 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
113492	52.0 to 65.1 feet	Key Note Segment		5 ft	65			
113454	65.5 to 73.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
113455	76.8 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
113456	93.5 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
113432	103.3 to 104.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
113457	103.7 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
113458	110.8 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
113459	128.0 to 131.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
113493	132.7 to 146.1 feet	Key Note Segment		5 ft	67			
113433	133.7 to 134.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
113434	143.7 to 144.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113460	147.7 to 154.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
113435	148.6 to 149.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
113461	159.3 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
113462	166.5 to 176.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
113463	177.5 to 185.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
113494	185.7 to 199.8 feet	Key Note Segment		5 ft	71			
113464	199.8 to 203.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$740**
113465	203.5 to 237.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
113436	226.0 to 227.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
113495	237.5 to 252.1 feet	Key Note Segment		5 ft	73			
113437	238.9 to 239.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113466	256.2 to 262.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
113438	257.2 to 258.2 feet	**Vertical Change**	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281526	MONTEREY DR	HELENA WAY	GARY LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113496	262.6 to 276.3 feet	Key Note Segment		5 ft	68			
113467	284.0 to 298.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
113439	289.5 to 290.5 feet	**Vertical Change**	1.2"	5 ft	5	REF		
113468	303.2 to 307.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
113469	310.7 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
113440	311.6 to 312.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
113470	317.1 to 342.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,300**
113497	342.6 to 356.7 feet	Key Note Segment		5 ft	71			
113471	360.8 to 366.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
113498	366.3 to 380.9 feet	Key Note Segment		5 ft	73			
113472	393.9 to 404.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
113441	394.4 to 395.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
113473	407.5 to 409.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
113499	448.0 to 461.4 feet	Key Note Segment		5 ft	67			
113442	448.9 to 449.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
113474	462.0 to 466.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
113475	472.6 to 485.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
113476	485.5 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
113444	487.2 to 488.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
113477	492.7 to 494.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
113445	500.1 to 501.1 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
113478	503.5 to 507.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
113479	513.0 to 515.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
113480	520.4 to 530.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
113446	521.5 to 522.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
113481	533.0 to 551.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
113500	551.8 to 565.9 feet	Key Note Segment		5 ft	71			
113447	554.1 to 555.1 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281526	MONTEREY DR	HELENA WAY	GARY LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113482	565.9 to 569.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	$740
113483	572.9 to 575.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
113501	577.7 to 591.6 feet	Key Note Segment		5 ft	69			
113484	592.2 to 595.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$680
113485	596.3 to 597.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
113486	600.2 to 605.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,060
113448	618.8 to 619.8 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
113502	630.7 to 644.5 feet	Key Note Segment		5 ft	69			
113449	638.3 to 639.3 feet	Vertical Change	.3"	5 ft	5	REF		
113487	644.7 to 647.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
113488	648.6 to 657.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
113489	660.4 to 667.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
113450	660.8 to 661.8 feet	Vertical Change	1.45"	5 ft	5	REF		
113490	667.4 to 681.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,340

TOTAL COST FOR: E *side of* **MONTEREY DR** *Starting at:* **HELENA WAY** **$190,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201617	MONTEREY DR	MADRID LN	ST MONTELENA CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77867	0.0 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
77868	18.0 to 27.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
77869	29.6 to 50.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,300**
77870	53.4 to 60.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
77871	60.7 to 67.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
77872	69.2 to 78.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
77873	78.4 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
77874	86.9 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
77865	92.5 to 93.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
77882	102.8 to 117.8 feet	Key Note Segment		5 ft	75			
77875	117.8 to 128.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,100**
77883	128.3 to 144.4 feet	Key Note Segment		5 ft	80			
77876	144.4 to 179.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	178	SF	$40	**$7,100**
77877	183.1 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
77884	192.4 to 208.4 feet	Key Note Segment		5 ft	80			
77878	210.4 to 215.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
77885	217.9 to 233.7 feet	Key Note Segment		5 ft	79			
77879	233.7 to 244.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	56	SF	$40	**$2,220**
77866	247.0 to 248.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
77880	248.4 to 256.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
77881	258.7 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: E *side of* **MONTEREY DR** *Starting at:* **MADRID LN** **$81,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201624	MONTEREY DR	ST MONTELENA CT	ALMOND AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77967	1.4 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
77968	16.1 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
77969	23.6 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
77979	32.2 to 48.5 feet	Key Note Segment		5 ft	81			
77965	32.8 to 33.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
77970	48.5 to 56.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	42	SF	$40	**$1,660**
77980	56.8 to 76.6 feet	Key Note Segment		5 ft	99			
77971	77.8 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
77972	103.0 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
77973	116.3 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
77981	144.2 to 161.3 feet	Key Note Segment		5 ft	86			
77982	170.6 to 185.4 feet	Key Note Segment		5 ft	74			
77974	187.3 to 188.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77975	189.8 to 221.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
77983	221.1 to 237.5 feet	Key Note Segment		5 ft	82			
77976	237.5 to 243.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,140**
77977	256.8 to 262.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
77978	262.4 to 278.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**

TOTAL COST FOR: E *side of* **MONTEREY DR** *Starting at:* **ST MONTELENA CT** **$73,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201610	MONTEREY DR	ST. MONTELENA DR	GARY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77763	0.0 to 2.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
77764	3.2 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
77765	14.8 to 23.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
77766	26.5 to 28.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
77809	28.3 to 43.3 feet	Key Note Segment		5 ft	75			
77752	29.1 to 30.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
77767	51.7 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
77810	53.8 to 69.2 feet	Key Note Segment		5 ft	77			
77768	69.6 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
77769	89.3 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77770	93.6 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
77771	117.8 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
77811	131.6 to 148.4 feet	Key Note Segment		5 ft	84			
77772	148.4 to 149.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
77773	149.8 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
77812	156.3 to 172.3 feet	Key Note Segment		5 ft	80			
77774	172.3 to 206.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	171	SF	$40	**$6,840**
77775	206.8 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77776	211.3 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77777	219.9 to 225.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
77778	233.8 to 235.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
77813	235.4 to 250.8 feet	Key Note Segment		5 ft	77			
77779	250.8 to 257.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	35	SF	$40	**$1,380**
77780	257.7 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
77814	259.8 to 277.3 feet	Key Note Segment		5 ft	88			
77781	277.3 to 292.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	75	SF	$40	**$3,000**
77782	292.3 to 297.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
77783	299.6 to 303.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201610	MONTEREY DR	ST. MONTELENA DR	GARY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77784	305.9 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
77785	317.8 to 338.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
77753	328.3 to 329.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
77815	339.3 to 354.1 feet	Key Note Segment		5 ft	74			
77786	354.1 to 358.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$920**
77816	366.3 to 380.8 feet	Key Note Segment		5 ft	73			
77787	380.8 to 395.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	72	SF	$40	**$2,880**
77754	392.7 to 393.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
77755	397.2 to 398.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
77788	397.5 to 400.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
77789	401.0 to 442.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,840**
77817	442.4 to 460.9 feet	Key Note Segment		5 ft	93			
77790	460.9 to 462.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
77818	466.6 to 483.2 feet	Key Note Segment		5 ft	83			
77791	484.9 to 488.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
77792	492.3 to 502.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
77793	504.4 to 518.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
77794	520.8 to 537.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
77795	542.0 to 545.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
77819	545.8 to 561.2 feet	Key Note Segment		5 ft	77			
77796	563.2 to 566.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
77797	566.5 to 570.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
77820	572.5 to 587.7 feet	Key Note Segment		5 ft	76			
77756	573.2 to 574.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77798	587.7 to 621.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	169	SF	$40	**$6,760**
77757	587.9 to 588.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
77799	625.8 to 631.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
77800	631.3 to 638.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201610	MONTEREY DR	ST. MONTELENA DR	GARY LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77801	641.9 to 646.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
77802	646.9 to 648.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77821	648.8 to 663.0 feet	Key Note Segment		5 ft	71			
77759	650.1 to 651.1 feet	**Vertical Change**	.52"	5 ft	5	REF		
77760	656.9 to 657.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
77761	663.9 to 664.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
77803	667.3 to 674.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
77822	674.3 to 690.2 feet	Key Note Segment		5 ft	80			
77804	690.3 to 693.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
77805	694.2 to 696.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
77806	698.2 to 712.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	**$8,400**
77762	703.3 to 704.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77807	713.3 to 721.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
77808	721.9 to 730.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: W *side of* **MONTEREY DR** *Starting at:* **ST. MONTELENA DR** **$195,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211324	MONTEREY ST	316 LEWIS ST	LEWIS ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106124	0.0 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
106121	11.9 to 12.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
106125	15.8 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
106122	27.2 to 28.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
106126	35.6 to 40.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
106127	40.5 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
106128	44.3 to 45.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
106123	51.7 to 52.7 feet	**Vertical Change**	1.78"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MONTEREY ST** *Starting at:* **316 LEWIS ST** **$28,974.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211054	MONTEREY ST	ALMOND AVE	EL MONTE CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79040	0.8 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
79033	17.2 to 18.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
79041	20.6 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
79042	24.9 to 75.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	252	SF	$120	**$30,180**
79043	77.4 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
79085	87.0 to 113.9 feet	Key Note Segment		5 ft	135			
79044	116.2 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
79045	132.7 to 134.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
79046	134.2 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
79047	150.4 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79048	157.5 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
79049	166.9 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,840**
79050	219.9 to 241.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
79051	243.3 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
79052	254.3 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
79053	274.1 to 277.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79054	292.8 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
79055	296.9 to 304.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
79056	326.8 to 334.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
79057	338.7 to 345.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
79058	349.3 to 371.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
79059	375.2 to 415.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,060**
79034	411.2 to 412.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
79060	418.1 to 422.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
79061	422.8 to 424.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
79062	427.1 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
79063	433.8 to 435.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
79086	435.8 to 461.3 feet	Key Note Segment		5 ft	128			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211054	MONTEREY ST	ALMOND AVE	EL MONTE CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79064	463.9 to 472.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
79065	475.0 to 480.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
79066	483.5 to 488.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
79067	491.3 to 510.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
79068	512.2 to 520.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
79069	523.6 to 557.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,100**
79035	545.3 to 546.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
79070	559.9 to 569.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
79071	585.3 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
79072	599.0 to 606.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
79073	610.7 to 613.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
79074	618.6 to 634.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
79075	644.9 to 647.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
79087	650.4 to 669.4 feet	Key Note Segment		5 ft	95			
79036	669.7 to 670.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
79076	670.0 to 672.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
79077	677.7 to 681.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
79088	681.4 to 699.8 feet	Key Note Segment		5 ft	92			
79037	682.8 to 683.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
79038	691.2 to 692.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
79078	699.8 to 703.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
79079	708.7 to 720.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
79080	723.2 to 724.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
79081	729.0 to 734.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
79039	736.1 to 737.1 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
79082	738.3 to 740.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
79083	744.4 to 779.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,820**
79084	795.8 to 807.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211054	MONTEREY ST	ALMOND AVE	EL MONTE CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**E**	*side of* **MONTEREY ST**	*Starting at:* **ALMOND AVE**					**$304,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201657	MONTEREY ST	ALMOND AVE	ST. MONTELENA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78182	0.0 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
78183	8.4 to 15.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
78184	18.5 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
78202	35.3 to 50.7 feet	Key Note Segment		5 ft	77			
78185	54.9 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
78186	64.8 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
78187	74.3 to 82.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
78203	86.4 to 102.5 feet	Key Note Segment		5 ft	81			
78188	102.5 to 106.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
78189	109.2 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
78204	112.5 to 130.3 feet	Key Note Segment		5 ft	89			
78190	131.0 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
78191	145.9 to 150.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,580**
78192	155.2 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
78193	166.0 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
78194	179.4 to 185.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
78195	193.1 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
78205	198.8 to 214.0 feet	Key Note Segment		5 ft	76			
78196	214.0 to 215.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
78197	215.9 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
78206	224.4 to 241.8 feet	Key Note Segment		5 ft	87			
78180	225.5 to 226.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
78198	252.8 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
78199	259.8 to 271.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
78200	273.9 to 275.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
78207	274.6 to 276.9 feet		5.0-6.0%	5 ft	11			
78208	274.6 to 276.9 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,380**
78181	275.1 to 276.1 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201657	MONTEREY ST	ALMOND AVE	ST. MONTELENA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78201	275.9 to 276.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **ALMOND AVE** **$73,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211131	MONTEREY ST	AWAHNEE CT	WAWONA CT	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79256	0.4 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
79257	10.7 to 17.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
79258	20.7 to 40.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
79259	43.5 to 64.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
79260	66.4 to 77.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,660**
79261	80.1 to 91.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
79262	93.1 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
79263	98.3 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
79264	103.9 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
79265	113.9 to 123.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
79255	123.6 to 124.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
79266	125.3 to 129.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
79267	129.7 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
79268	131.6 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
79269	137.1 to 151.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **AWAHNEE CT** **$76,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211111	MONTEREY ST	CLOUD REST CT	HALF DOME CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79174	0.6 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,320**
79171	6.5 to 7.5 feet	**Vertical Change**	3.23"	5 ft	5	REF		
79175	22.8 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
79176	34.9 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
79177	46.8 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
79178	55.9 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
79179	74.8 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79180	80.3 to 86.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
79181	87.2 to 92.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
79182	92.4 to 96.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
79172	97.0 to 98.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
79183	97.3 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
79184	99.6 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
79185	106.0 to 150.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	223	SF	$120	**$26,820**
79173	121.8 to 122.8 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **CLOUD REST CT** **$74,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211107	MONTEREY ST	EL MONTE CT	CLOUD REST CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79135	0.0 to 5.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
79136	6.4 to 26.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
79137	26.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
79138	42.6 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
79139	50.0 to 60.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
79140	61.9 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
79141	92.8 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
79134	100.3 to 101.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
79142	105.8 to 141.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,660**
79143	144.5 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
79144	149.3 to 150.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **EL MONTE CT** **$75,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211118	MONTEREY ST	HALF DOME CT	AWAHNEE CT	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79217	0.0 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
79218	5.0 to 21.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
79219	21.3 to 22.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
79220	23.4 to 26.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
79221	30.4 to 33.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
79222	34.3 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	184	SF	$120	**$22,020**
79214	45.9 to 46.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
79215	56.0 to 57.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
79223	73.1 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
79224	79.8 to 91.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
79225	95.1 to 96.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
79226	99.1 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
79227	110.6 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
79228	124.0 to 127.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
79229	128.3 to 144.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,900**
79216	129.5 to 133.4 feet	**Vertical Change**	.32"	5 ft	20	REF		
79230	145.3 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **HALF DOME CT** **$79,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211332	MONTEREY ST	LEWIS ST	OLIVE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106169	6.6 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
106170	15.3 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106171	22.4 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
106182	30.6 to 50.1 feet	Key Note Segment		5 ft	98			
106172	50.1 to 53.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
106173	55.0 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
106174	58.4 to 59.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
106162	59.3 to 60.3 feet	**Vertical Change**	.48"	5 ft	5	REF		
106183	60.1 to 74.7 feet	Key Note Segment		5 ft	73			
106163	63.6 to 64.6 feet	**Vertical Change**	-.63"	5 ft	5	REF		
106175	76.3 to 96.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
106176	97.3 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
106164	98.2 to 99.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
106184	102.3 to 122.7 feet	Key Note Segment		5 ft	102			
106165	114.4 to 115.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
106166	117.6 to 118.6 feet	**Vertical Change**	.81"	5 ft	5	REF		
106177	125.3 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
106167	133.7 to 134.7 feet	**Vertical Change**	3.13"	5 ft	5	SF	$75	**$375**
106178	140.3 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
106185	158.2 to 178.5 feet	Key Note Segment		5 ft	102			
106168	178.6 to 179.6 feet	**Vertical Change**	1.5"	5 ft	5	SF	$75	**$375**
106179	183.0 to 187.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
106180	187.6 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
106181	197.8 to 205.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: E *side of* **MONTEREY ST** *Starting at:* **LEWIS ST** **$48,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211319	MONTEREY ST	LEWIS ST	112 MONTEREY ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106115	0.7 to 11.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
106119	12.0 to 28.2 feet	Key Note Segment		5 ft	81			
106112	12.9 to 13.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
106113	28.2 to 29.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
106116	29.6 to 30.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
106120	31.9 to 47.4 feet	Key Note Segment		5 ft	78			
106117	49.8 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
106118	56.9 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
106114	58.6 to 59.6 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **LEWIS ST** **$12,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211553	MONTEREY ST	PECAN AVE	HELENA WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80412	1.8 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
80407	2.1 to 3.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
80413	26.0 to 27.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
80414	27.6 to 30.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
80415	30.8 to 35.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
80416	36.8 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
80417	44.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80418	51.3 to 54.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
80419	56.3 to 61.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
80420	61.7 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
80421	78.4 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
80422	83.8 to 86.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
80423	91.0 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
80424	109.3 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
80425	113.8 to 115.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
80426	115.0 to 116.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
80408	117.9 to 118.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
80427	118.8 to 120.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
80428	123.3 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
80409	126.0 to 127.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
80429	131.0 to 141.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
80410	133.0 to 134.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
80440	142.0 to 159.8 feet	Key Note Segment		5 ft	89			
80430	159.9 to 172.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	65	SF	$40	**$2,580**
80431	174.6 to 190.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
80432	191.6 to 194.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
80433	204.3 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
80434	218.3 to 229.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211553	MONTEREY ST	PECAN AVE	HELENA WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80435	231.5 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
80436	234.9 to 238.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
80437	240.7 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
80438	258.0 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
80439	268.3 to 277.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
80411	277.6 to 278.6 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MONTEREY ST** *Starting at:* **PECAN AVE** **$113,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211102	MONTEREY ST	WALNUT ST	EL MONTE CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79104	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
79105	2.4 to 11.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
79106	13.4 to 65.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	261	SF	$120	**$31,260**
79107	66.3 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,900**
79108	91.7 to 92.9 feet		5.0-6.0%	5 ft	6			
79103	92.7 to 93.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **WALNUT ST** **$53,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211135	MONTEREY ST	WAWONA CT	ALMOND AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79304	1.8 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
79305	13.8 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
79306	23.3 to 26.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
79307	28.3 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79302	32.2 to 33.2 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
79308	33.6 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
79309	41.8 to 48.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
79310	50.9 to 61.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
79303	61.3 to 62.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **MONTEREY ST** *Starting at:* **WAWONA CT** **$26,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106101200	MOORE AVE	521 A ST	SUNRISE AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50499	1.4 to 3.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
50500	4.8 to 14.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
50501	14.8 to 17.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
50502	17.4 to 19.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
50503	20.0 to 21.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
50504	22.7 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
50505	35.1 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50497	36.9 to 37.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50506	39.0 to 53.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
50507	54.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
50508	60.9 to 66.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
50509	68.9 to 79.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,240**
50498	80.0 to 81.0 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
50510	81.9 to 82.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
50511	85.1 to 96.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
50512	99.1 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
50513	103.2 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: NW *side of* **MOORE AVE** *Starting at:* **521 A ST** **$51,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101144	MOORE AVE	614 MOORE AVE	609 MOORE AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56030	0.0 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
56039	12.2 to 34.0 feet	Key Note Segment		5 ft	109			
56031	37.8 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
56032	50.6 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
56033	58.3 to 74.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
56027	60.8 to 61.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
56028	68.0 to 69.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
56034	76.5 to 91.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
56040	91.8 to 115.7 feet	Key Note Segment		5 ft	120			
56035	121.3 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
56036	134.2 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
56029	135.0 to 136.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
56037	137.3 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
56038	141.8 to 144.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**

TOTAL COST FOR: NW *side of* **MOORE AVE** *Starting at:* **614 MOORE AVE** **$37,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101137	MOORE AVE	618 MOORE AVE	618 MOORE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56012	0.4 to 21.1 feet	Key Note Segment		5 ft	104			
56009	22.3 to 23.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
56010	24.6 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
56011	53.3 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: SE *side of* **MOORE AVE** *Starting at:* **618 MOORE AVE** **$16,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101139	MOORE AVE	628 MOORE AVE	528 MOORE AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56024	0.2 to 19.5 feet	Key Note Segment		5 ft	97			
56013	16.4 to 17.4 feet	Vertical Change	.27"	5 ft	5	REF		
56014	20.2 to 21.2 feet	Vertical Change	3.09"	5 ft	5	REF		
56017	20.3 to 48.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	139	SF	$40	**$5,560**
56015	23.6 to 24.6 feet	Vertical Change	.37"	5 ft	5	REF		
56018	51.3 to 57.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
56016	55.5 to 56.5 feet	Vertical Change	.31"	5 ft	5	REF		
56025	57.9 to 77.3 feet	Key Note Segment		5 ft	97			
56019	78.7 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
56020	82.0 to 89.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
56021	91.4 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
56022	100.3 to 103.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
56026	106.0 to 117.8 feet	Key Note Segment		5 ft	59			
56023	117.8 to 119.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$300**

TOTAL COST FOR: SE *side of* **MOORE AVE** *Starting at:* **628 MOORE AVE** **$21,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211514	MUNRAS AVE	BERNARDI AVE	PECAN AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80223	1.1 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,660**
80214	6.0 to 7.0 feet	**Vertical Change**	.73"	5 ft	5	REF		
80215	8.9 to 9.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
80244	12.3 to 32.3 feet	Key Note Segment		5 ft	100			
80224	32.4 to 39.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	34	SF	$40	**$1,380**
80225	39.4 to 47.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
80245	48.3 to 67.2 feet	Key Note Segment		5 ft	95			
80226	67.8 to 74.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
80227	75.2 to 82.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
80228	84.8 to 90.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
80216	85.0 to 86.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
80229	90.3 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
80217	92.9 to 93.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
80230	98.3 to 111.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
80231	111.1 to 116.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
80218	111.6 to 112.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
80232	116.9 to 121.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
80246	124.0 to 143.7 feet	Key Note Segment		5 ft	98			
80219	124.6 to 125.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
80233	144.8 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
80247	153.8 to 172.8 feet	Key Note Segment		5 ft	95			
80220	173.3 to 174.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
80234	174.3 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
80235	185.3 to 201.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
80236	214.4 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
80237	226.5 to 233.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
80248	234.1 to 253.3 feet	Key Note Segment		5 ft	96			
80238	255.9 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211514	MUNRAS AVE	BERNARDI AVE	PECAN AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80249	265.8 to 285.3 feet	Key Note Segment		5 ft	98			
80239	286.3 to 301.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
80240	306.0 to 307.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
80241	308.3 to 319.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
80250	319.9 to 342.8 feet	Key Note Segment		5 ft	115			
80221	320.3 to 321.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
80222	332.5 to 333.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
80242	343.3 to 362.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	98	SF	$40	**$3,920**
80243	362.9 to 364.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **MUNRAS AVE** *Starting at:* **BERNARDI AVE** **$96,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211607	MUNRAS AVE	PECAN AVE	SAN ANGELO AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80441	1.2 to 29.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
80442	31.3 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
80443	57.0 to 59.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
80444	60.8 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
80445	76.8 to 82.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
80446	78.6 to 80.3 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **MUNRAS AVE** *Starting at:* **PECAN AVE** **$43,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211435	MUNRAS AVE	SAINT MARY AVE	SAN ANDREA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79906	0.0 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
79907	19.8 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79931	21.7 to 42.1 feet	Key Note Segment		5 ft	102			
79908	42.8 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
79909	48.2 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
79910	65.3 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
79895	72.1 to 73.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
79911	75.2 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
79932	82.3 to 105.2 feet	Key Note Segment		5 ft	115			
79912	106.1 to 110.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
79933	110.6 to 135.5 feet	Key Note Segment		5 ft	125			
79913	139.1 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
79914	166.3 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
79896	173.4 to 174.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
79897	185.5 to 186.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
79934	189.3 to 212.8 feet	Key Note Segment		5 ft	118			
79915	212.8 to 219.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**
79935	219.8 to 242.3 feet	Key Note Segment		5 ft	113			
79916	246.5 to 257.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
79898	250.4 to 251.4 feet	**Vertical Change**	3"	5 ft	5	REF		
79917	259.5 to 268.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
79918	268.9 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
79919	275.0 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
79920	293.7 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
79936	301.9 to 322.0 feet	Key Note Segment		5 ft	101			
79921	323.7 to 326.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
79937	328.6 to 350.3 feet	Key Note Segment		5 ft	109			
79922	351.5 to 353.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211435	MUNRAS AVE	SAINT MARY AVE	SAN ANDREA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79899	352.4 to 353.4 feet	Vertical Change	.39"	5 ft	5	REF		
79923	354.8 to 355.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
79900	385.3 to 386.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
79924	387.5 to 391.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
79925	391.0 to 392.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
79901	395.4 to 396.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
79926	404.8 to 408.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79938	409.8 to 430.0 feet	Key Note Segment		5 ft	101			
79902	411.4 to 412.4 feet	Vertical Change	-.35"	5 ft	5	REF		
79927	430.7 to 436.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
79939	436.9 to 456.3 feet	Key Note Segment		5 ft	97			
79903	456.1 to 457.1 feet	Vertical Change	.32"	5 ft	5	REF		
79928	458.1 to 466.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
79929	469.5 to 470.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
79930	470.9 to 482.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
79905	476.5 to 477.5 feet	Vertical Change	-.38"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **MUNRAS AVE** *Starting at:* **SAINT MARY AVE** **$110,045.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211446	MUNRAS AVE	SAN ANDREA AVE	SAN MARCO AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80009	0.0 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
80010	5.9 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80011	12.8 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
80012	19.5 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**
80013	42.2 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
80014	45.9 to 49.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
80015	51.7 to 119.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	341	SF	$120	**$40,860**
80018	76.2 to 77.2 feet		5.0-6.0%	5 ft	5			
80016	122.1 to 125.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
80017	126.5 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
80019	167.4 to 168.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **MUNRAS AVE** *Starting at:* **SAN ANDREA AVE** **$91,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211251	MUNRAS AVE	SAN ANGELO AVE	BERNARDI AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79313	0.0 to 25.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
79314	28.0 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
79315	51.2 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
79316	55.2 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
79317	87.3 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
79311	102.7 to 103.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
79318	103.7 to 118.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
79319	120.6 to 148.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,440**
79312	132.4 to 133.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
79320	148.3 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**

TOTAL COST FOR: W *side of* **MUNRAS AVE** *Starting at:* **SAN ANGELO AVE** **$91,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211454	MUNRAS AVE	SAN MARCO AVE	SAINT MARY AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80096	0.0 to 1.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
80097	16.2 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80091	17.9 to 18.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
80098	41.2 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
80092	44.4 to 45.4 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
80099	48.8 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
80100	84.8 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
80093	85.7 to 86.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
80101	142.9 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80094	143.6 to 144.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
80102	149.8 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
80095	169.3 to 170.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **MUNRAS AVE** *Starting at:* **SAN MARCO AVE** **$23,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211357	N A ST	4TH ST	CENTRAL AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43294	14.8 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
43295	24.6 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
43296	28.5 to 29.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
43297	29.8 to 31.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43284	30.6 to 31.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
43309	38.3 to 48.0 feet	Key Note Segment		5 ft	49			
43285	41.1 to 42.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
43286	43.3 to 44.3 feet	**Vertical Change**	.7"	5 ft	5	REF		
43287	45.5 to 46.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
43298	48.7 to 50.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
43312	49.2 to 50.8 feet		5.0-6.0%	5 ft	8			
43288	49.8 to 50.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
43310	51.1 to 56.8 feet	Key Note Segment		5 ft	29			
43299	56.8 to 82.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	128	SF	$40	**$5,100**
43300	84.9 to 92.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
43301	92.8 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43302	105.1 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
43303	122.7 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43304	131.1 to 133.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
43305	140.4 to 145.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
43311	146.1 to 157.2 feet	Key Note Segment		5 ft	55			
43306	157.2 to 177.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	100	SF	$40	**$4,000**
43289	176.6 to 177.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
43307	193.3 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43290	205.6 to 206.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
43308	213.4 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
43291	218.6 to 219.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
43292	225.4 to 226.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211357	N A ST	4TH ST	CENTRAL AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43293	234.0 to 235.0 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **N A ST** *Starting at:* **4TH ST** **$33,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211342	N A ST	4TH ST	5TH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43168	1.3 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
43161	66.3 to 67.3 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
43185	120.5 to 134.3 feet	Key Note Segment		5 ft	69			
43169	134.3 to 144.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,120**
43170	145.5 to 150.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
43171	154.6 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
43172	160.3 to 165.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,300**
43173	168.1 to 184.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
43186	185.3 to 194.7 feet	Key Note Segment		5 ft	47			
43174	194.8 to 210.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	78	SF	$40	**$3,100**
43175	210.3 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
43176	223.4 to 231.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
43162	239.1 to 240.1 feet	**Vertical Change**	1.6"	5 ft	5	SF	$75	**$375**
43177	241.9 to 244.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
43163	246.3 to 247.3 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
43164	250.1 to 251.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
43178	252.8 to 254.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
43179	254.2 to 255.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43180	255.7 to 259.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
43181	259.6 to 260.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
43165	261.4 to 262.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
43182	264.8 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
43183	269.8 to 276.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
43167	274.2 to 275.2 feet	**Vertical Change**	.5"	5 ft	5	REF		
43184	279.0 to 280.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43187	286.4 to 289.5 feet		6.0-7.0%	5 ft	16			
43188	287.4 to 289.5 feet	Running Slope	7.0-8.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: SW *side of* **N A ST** *Starting at:* **4TH ST** **$51,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211353	N A ST	5TH ST	4TH ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43249	0.1 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
43250	1.7 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
43251	16.0 to 19.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,340**
43252	20.6 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
43253	41.4 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43236	42.3 to 43.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
43254	48.6 to 54.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
43255	57.1 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
43256	61.9 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43257	65.2 to 83.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
43237	78.3 to 79.3 feet	**Vertical Change**	-.68"	5 ft	5	REF		
43238	82.7 to 83.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
43258	83.8 to 87.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
43239	87.5 to 88.5 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
43280	87.8 to 96.5 feet	Key Note Segment		5 ft	44			
43259	96.5 to 100.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
43260	102.2 to 106.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
43240	105.6 to 106.6 feet	**Vertical Change**	1.04"	5 ft	5	REF		
43261	110.4 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
43262	118.3 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
43241	123.8 to 124.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
43263	124.7 to 126.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	7	SF	$120	**$780**
43281	127.5 to 135.7 feet	Key Note Segment		5 ft	41			
43264	135.7 to 137.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
43265	140.1 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
43266	144.0 to 158.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,820**
43267	161.2 to 166.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
43268	168.9 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211353	N A ST	5TH ST	4TH ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43269	172.4 to 182.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
43270	182.8 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
43243	186.5 to 187.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
43271	188.3 to 190.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
43282	190.3 to 204.8 feet	Key Note Segment		5 ft	73			
43244	190.8 to 191.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
43272	205.4 to 212.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,360**
43273	212.6 to 216.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
43283	216.3 to 229.2 feet	Key Note Segment		5 ft	65			
43274	229.2 to 231.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
43275	237.5 to 245.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
43245	238.9 to 239.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
43276	246.9 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
43277	252.8 to 259.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
43247	259.4 to 260.4 feet	**Vertical Change**	.53"	5 ft	5	REF		
43248	265.7 to 266.7 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
43278	270.9 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
43279	275.4 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NE *side of* **N A ST** *Starting at:* **5TH ST** **$96,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211345	N A ST	5TH ST	E YOSEMITE AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43192	29.8 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
43193	36.3 to 37.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
43194	38.2 to 39.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
43195	41.6 to 43.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$900**
43196	63.5 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
43197	100.7 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
43189	109.3 to 110.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
43198	118.9 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43199	122.2 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
43200	129.5 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
43201	137.6 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
43202	142.2 to 143.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
43203	143.4 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
43204	156.9 to 164.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
43205	164.5 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
43215	188.3 to 207.6 feet	Key Note Segment		5 ft	97			
43206	207.6 to 212.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	24	SF	$40	**$960**
43207	212.9 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
43208	228.8 to 235.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
43209	235.8 to 251.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
43210	256.1 to 275.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,340**
43211	278.8 to 284.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
43190	282.9 to 283.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
43212	284.0 to 290.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
43213	290.8 to 294.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
43214	294.5 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
43191	299.8 to 300.8 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N A ST** *Starting at:* **5TH ST** **$88,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105211008	N A ST	CENTRAL AVE	RIVERWALK DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42164	1.7 to 2.7 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
42172	3.5 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	$14,940
42165	5.2 to 6.2 feet	Vertical Change	2.85"	5 ft	5	REF		
42166	8.5 to 9.5 feet	Vertical Change	.45"	5 ft	5	REF		
42173	32.0 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,660
42174	45.9 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
42167	50.0 to 51.0 feet	Vertical Change	-.27"	5 ft	5	REF		
42189	51.8 to 73.5 feet	Key Note Segment		5 ft	109			
42175	74.7 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
42176	87.8 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,500
42168	97.2 to 98.2 feet	Vertical Change	1.56"	5 ft	5	REF		
42169	110.0 to 111.0 feet	Vertical Change	.35"	5 ft	5	REF		
42177	113.8 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
42190	123.8 to 152.3 feet	Key Note Segment		5 ft	143			
42178	152.3 to 162.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	51	SF	$40	$2,060
42170	166.0 to 169.0 feet	Vertical Change	-.28"	5 ft	15	LF	$75	$1,125
42179	170.4 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,140
42180	185.0 to 187.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
42181	190.5 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
42182	200.9 to 206.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
42191	208.2 to 220.3 feet	Key Note Segment		5 ft	61			
42183	223.2 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	$15,660
42171	235.6 to 236.6 feet	Vertical Change	.31"	5 ft	5	REF		
42192	249.3 to 263.7 feet	Key Note Segment		5 ft	72			
42184	263.8 to 274.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	55	SF	$40	$2,200
42185	282.4 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
42186	286.0 to 295.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
42193	296.4 to 310.6 feet	Key Note Segment		5 ft	71			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105211008	N A ST	CENTRAL AVE	RIVERWALK DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42187	310.8 to 313.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	**$600**
42188	333.7 to 340.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: E *side of* **N A ST** *Starting at:* **CENTRAL AVE** **$96,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211339	N A ST	CENTRAL AVE	4TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43132	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
43133	4.3 to 5.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
43134	5.8 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
43120	27.9 to 28.9 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
43135	31.2 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
43158	32.3 to 39.8 feet	Key Note Segment		5 ft	38			
43136	50.9 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
43121	62.7 to 63.7 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
43122	65.5 to 66.5 feet	**Vertical Change**	.81"	5 ft	5	SF	$75	**$375**
43137	70.8 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
43138	81.8 to 93.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
43139	97.8 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
43123	118.6 to 119.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
43140	122.6 to 123.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
43141	140.7 to 142.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
43142	142.0 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
43143	150.0 to 151.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43144	154.8 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
43125	167.3 to 168.3 feet	**Vertical Change**	.81"	5 ft	5	REF		
43145	168.3 to 170.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
43126	173.6 to 174.6 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
43127	176.1 to 181.5 feet	**Vertical Change**	.38"	5 ft	27	LF	$75	**$2,025**
43146	180.8 to 182.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
43147	182.9 to 190.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
43128	187.1 to 188.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
43148	194.0 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43149	199.3 to 202.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
43150	204.6 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211339	N A ST	CENTRAL AVE	4TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43151	207.8 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43160	222.1 to 223.1 feet	Continuous Width	36"	5 ft	5	SF	$120	**$600**
43152	223.5 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
43153	232.0 to 234.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
43154	236.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
43130	238.3 to 239.3 feet	Vertical Change	.43"	5 ft	5	REF		
43131	243.9 to 244.9 feet	Vertical Change	.62"	5 ft	5	SF	$75	**$375**
43155	250.1 to 260.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
43156	261.7 to 267.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
43157	267.2 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43159	274.7 to 276.2 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: SW *side of* **N A ST** *Starting at:* **CENTRAL AVE** **$82,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211349	N A ST	E YOSEMITE AVE	5TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43219	10.7 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	128	SF	$120	**$15,372**
43220	26.8 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	226	SF	$120	**$27,090**
43221	51.8 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	11	SF	$120	**$1,260**
43235	57.5 to 79.9 feet	Key Note Segment		11 ft	235			
43216	58.8 to 59.8 feet	**Vertical Change**	-.31"	11 ft	11	REF		
43222	80.9 to 86.0 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	54	SF	$120	**$6,426**
43223	86.2 to 89.5 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	35	SF	$120	**$4,158**
43224	95.2 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	133	SF	$120	**$16,002**
43225	107.9 to 121.3 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	141	SF	$120	**$16,884**
43226	123.0 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	72	SF	$120	**$8,694**
43227	131.2 to 132.7 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	16	SF	$120	**$1,890**
43228	138.5 to 171.0 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	341	SF	$120	**$40,950**
43229	173.8 to 224.2 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	529	SF	$120	**$63,504**
43230	227.3 to 252.8 feet	Cross Slope (PAR)	4.0-5.0%	11 ft	268	SF	$120	**$32,130**
43231	253.8 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	170	SF	$120	**$20,412**
43218	273.3 to 274.3 feet	**Vertical Change**	.28"	11 ft	11	REF		
43232	274.3 to 284.6 feet	Cross Slope (PAR)	3.0-4.0%	11 ft	108	SF	$120	**$12,978**
43233	284.6 to 287.1 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	26	SF	$120	**$3,150**
43234	290.5 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	11 ft	102	SF	$120	**$12,222**

TOTAL COST FOR: NE *side of* **N A ST** *Starting at:* **E YOSEMITE AVE** **$283,122.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105211033	N A ST	RIVERWALK DR	CENTRAL AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42442	8.1 to 9.1 feet	Vertical Change	2.42"	5 ft	5	REF		
42447	8.5 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,880
42443	23.4 to 24.4 feet	Vertical Change	1.01"	5 ft	5	SF	$75	$375
42444	25.7 to 26.7 feet	Vertical Change	.55"	5 ft	5	SF	$75	$375
42448	32.0 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,920
42449	47.4 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
42450	52.0 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
42451	60.8 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
42452	70.3 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
42464	78.8 to 93.0 feet	Key Note Segment		5 ft	71			
42453	93.4 to 119.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	131	SF	$40	$5,240
42454	122.8 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
42455	130.9 to 134.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
42445	131.8 to 132.8 feet	Vertical Change	.73"	5 ft	5	REF		
42465	134.8 to 153.4 feet	Key Note Segment		5 ft	93			
42456	153.4 to 156.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	$520
42446	159.3 to 160.3 feet	Vertical Change	.58"	5 ft	5	SF	$75	$375
42457	162.2 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	$14,160
42466	187.6 to 202.8 feet	Key Note Segment		5 ft	76			
42458	205.8 to 225.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	$11,820
42459	228.3 to 229.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
42460	238.6 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
42461	256.7 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
42462	267.3 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
42463	277.1 to 281.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760

TOTAL COST FOR: W *side of* **N A ST** *Starting at:* **RIVERWALK DR** **$76,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105211040	N B ST	374 CENTRAL AVE	CENTRAL AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42508	0.1 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
42509	14.8 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
42510	32.4 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	297	SF	$120	**$35,640**
42507	89.0 to 90.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N B ST** *Starting at:* **374 CENTRAL AVE** **$41,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211333	N B ST	3RD ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43103	6.9 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43104	15.2 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
43105	26.9 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
43106	38.3 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
43107	41.2 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
43108	50.4 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
43101	61.6 to 62.6 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
43109	67.7 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43118	72.4 to 81.8 feet	Key Note Segment		5 ft	47			
43102	85.5 to 86.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
43119	86.3 to 101.7 feet	Key Note Segment		5 ft	77			
43110	101.7 to 106.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	23	SF	$40	**$920**
43111	106.3 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43112	111.0 to 113.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
43113	115.8 to 126.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
43114	126.6 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43115	139.1 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
43116	151.0 to 160.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
43117	160.7 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: NW *side of* **N B ST** *Starting at:* **3RD ST** **$46,370.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211310	N B ST	3RD ST	4TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42927	1.8 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
42928	3.3 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
42929	18.1 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
42919	31.8 to 32.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
42920	37.5 to 38.5 feet	**Vertical Change**	-.65"	5 ft	5	SF	$75	**$375**
42930	38.9 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
42931	44.9 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
42932	66.3 to 68.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
42933	74.3 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
42922	75.1 to 76.1 feet	**Vertical Change**	-.55"	5 ft	5	REF		
42934	79.3 to 81.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
42935	81.9 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
42923	82.1 to 83.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
42942	87.8 to 112.4 feet	Key Note Segment		5 ft	123			
42924	88.0 to 89.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
42936	112.4 to 114.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
42937	117.3 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
42943	140.1 to 163.0 feet	Key Note Segment		5 ft	115			
42938	163.3 to 182.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	94	SF	$40	**$3,780**
42939	185.0 to 214.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
42944	214.6 to 236.8 feet	Key Note Segment		5 ft	111			
42940	241.7 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
42926	261.2 to 262.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
42941	283.9 to 289.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: SW *side of* **N B ST** *Starting at:* **3RD ST** **$66,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211330	N B ST	4TH ST	3RD ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43096	2.3 to 17.3 feet	Key Note Segment		5 ft	75			
43078	20.0 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
43072	22.9 to 23.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
43079	32.2 to 48.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
43097	48.8 to 64.4 feet	Key Note Segment		5 ft	78			
43073	74.8 to 75.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
43080	87.8 to 93.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
43081	93.5 to 124.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,600**
43098	124.5 to 132.3 feet	Key Note Segment		5 ft	39			
43082	132.3 to 134.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
43083	135.4 to 138.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
43084	139.7 to 150.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
43085	152.9 to 156.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
43086	158.9 to 166.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
43099	166.2 to 175.1 feet	Key Note Segment		5 ft	45			
43087	175.6 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
43074	184.9 to 185.9 feet	**Vertical Change**	-.4"	5 ft	5	REF		
43088	192.7 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
43089	201.3 to 218.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
43075	206.3 to 207.3 feet	**Vertical Change**	.97"	5 ft	5	REF		
43090	221.4 to 229.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
43100	230.8 to 247.3 feet	Key Note Segment		5 ft	83			
43091	247.3 to 249.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	13	SF	$40	**$500**
43076	248.1 to 249.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
43092	249.8 to 251.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
43093	251.8 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
43094	273.5 to 288.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
43095	290.7 to 292.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211330	N B ST	4TH ST	3RD ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43077	293.2 to 294.2 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **N B ST** *Starting at:* **4TH ST** **$105,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211315	N B ST	4TH ST	5TH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42950	2.6 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
42951	26.2 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,460**
42945	41.8 to 42.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
42952	42.6 to 45.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
42953	48.9 to 59.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,240**
42972	62.2 to 74.8 feet	Key Note Segment		5 ft	63			
42973	75.7 to 88.8 feet	Key Note Segment		5 ft	66			
42946	88.7 to 89.7 feet	**Vertical Change**	1.06"	5 ft	5	REF		
42954	98.6 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
42955	107.3 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
42956	108.8 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
42957	126.0 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
42958	145.2 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
42974	150.8 to 159.8 feet	Key Note Segment		5 ft	45			
42947	181.1 to 182.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
42959	185.3 to 188.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
42948	192.8 to 193.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
42960	205.4 to 207.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
42961	209.5 to 214.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
42962	214.1 to 218.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
42963	218.7 to 219.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
42949	220.7 to 221.7 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
42964	226.2 to 227.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
42965	232.3 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
42975	238.5 to 248.9 feet	Key Note Segment		5 ft	52			
42966	251.3 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
42967	256.2 to 279.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,740**
42968	279.8 to 281.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211315	N B ST	4TH ST	5TH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42969	281.2 to 282.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
42970	284.4 to 292.4 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	40	SF	$120	**$4,800**
42971	292.4 to 293.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: SW *side of* **N B ST** *Starting at:* **4TH ST** **$90,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211327	N B ST	5TH ST	4TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43044	0.7 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
43045	14.8 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
43046	24.6 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
43047	42.0 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
43048	47.3 to 48.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
43049	49.1 to 50.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
43040	51.1 to 52.1 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
43050	53.1 to 58.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
43051	66.3 to 82.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
43052	83.4 to 84.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
43053	90.4 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
43054	95.2 to 97.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
43055	97.0 to 98.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
43056	99.5 to 108.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
43067	108.8 to 122.9 feet	Key Note Segment		5 ft	71			
43041	123.2 to 124.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
43057	123.3 to 146.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	118	SF	$40	**$4,700**
43058	146.8 to 148.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
43059	152.1 to 153.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
43060	156.8 to 158.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
43061	158.7 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
43062	169.8 to 171.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
43063	172.9 to 183.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
43068	183.5 to 203.8 feet	Key Note Segment		5 ft	102			
43042	212.8 to 213.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
43069	216.2 to 227.9 feet	Key Note Segment		5 ft	59			
43070	248.2 to 261.4 feet	Key Note Segment		5 ft	66			
43043	255.4 to 256.4 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211327	N B ST	5TH ST	4TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43064	262.3 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
43065	263.7 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
43066	269.8 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: NE *side of* **N B ST** *Starting at:* **5TH ST** **$72,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211319	N B ST	5TH ST	E YOSEMITE AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43001	0.5 to 12.4 feet	Key Note Segment		5 ft	60			
42979	12.4 to 39.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	134	SF	$40	$5,340
42980	42.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
42981	56.4 to 63.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,440
42982	64.1 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
42983	78.5 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
42984	81.3 to 86.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	$2,880
42985	86.1 to 87.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
42986	87.9 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
42987	103.9 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
42976	108.6 to 111.3 feet	Vertical Change	.27"	5 ft	14	REF		
42988	109.5 to 112.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$2,040
42977	114.1 to 115.1 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
43002	114.3 to 128.8 feet	Key Note Segment		5 ft	73			
43003	130.1 to 160.0 feet	Key Note Segment		5 ft	150			
42989	161.9 to 202.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	204	SF	$120	$24,420
42990	202.6 to 209.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	$3,840
43004	209.0 to 237.6 feet	Key Note Segment		5 ft	143			
42978	220.6 to 221.6 feet	Vertical Change	.3"	5 ft	5	REF		
42991	238.8 to 246.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	$4,320
42992	246.5 to 248.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	$1,200
42993	249.3 to 258.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	$5,220
42994	258.0 to 265.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	39	SF	$120	$4,680
42995	266.7 to 270.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
42996	271.5 to 272.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
42997	273.8 to 277.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,400
42998	278.0 to 279.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
42999	281.7 to 286.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,060

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211319	N B ST	5TH ST	E YOSEMITE AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43000	287.1 to 290.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: SW *side of* **N B ST** *Starting at:* **5TH ST** **$87,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211306	N B ST	CENTRAL AVE	3RD ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42898	0.0 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
42899	7.8 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
42915	21.9 to 29.8 feet	Key Note Segment		5 ft	40			
42900	30.7 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
42895	35.2 to 38.0 feet	**Vertical Change**	.6"	5 ft	14	SF	$75	**$1,050**
42901	38.8 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
42902	40.7 to 45.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
42903	46.8 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
42904	51.5 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
42896	59.2 to 60.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
42905	62.3 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
42906	73.6 to 77.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
42907	77.6 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
42897	90.8 to 91.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
42908	98.8 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
42909	110.0 to 111.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
42916	111.3 to 118.7 feet	Key Note Segment		5 ft	37			
42910	118.8 to 121.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	14	SF	$40	**$540**
42911	122.7 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
42917	123.9 to 132.9 feet	Key Note Segment		5 ft	45			
42912	135.3 to 159.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,700**
42913	163.8 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
42918	164.8 to 179.8 feet	Key Note Segment		5 ft	75			
42914	192.1 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: SW *side of* **N B ST** *Starting at:* **CENTRAL AVE** **$66,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211323	N B ST	E YOSEMITE AVE	5TH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43036	3.5 to 30.7 feet	Key Note Segment		5 ft	136			
43012	31.3 to 33.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	$420
43013	34.9 to 39.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
43014	41.8 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	$5,940
43015	54.8 to 63.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	$5,340
43005	63.6 to 64.6 feet	Vertical Change	.37"	5 ft	5	REF		
43016	63.7 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,660
43006	77.1 to 78.1 feet	Vertical Change	.48"	5 ft	5	REF		
43017	77.8 to 80.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
43018	81.2 to 82.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	$900
43019	86.9 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
43020	106.3 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
43021	110.2 to 113.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
43022	113.7 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
43023	122.3 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
43024	127.3 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
43037	133.0 to 169.0 feet	Key Note Segment		5 ft	180			
43007	142.6 to 143.6 feet	Vertical Change	.33"	5 ft	5	REF		
43025	169.0 to 173.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	$980
43008	169.3 to 170.3 feet	Vertical Change	.54"	5 ft	5	REF		
43026	176.1 to 177.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
43027	180.5 to 184.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
43009	183.7 to 184.7 feet	Vertical Change	.44"	5 ft	5	REF		
43028	187.5 to 203.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	$9,360
43038	204.8 to 212.5 feet	Key Note Segment		5 ft	39			
43029	212.5 to 218.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	31	SF	$40	$1,240
43030	221.8 to 228.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020
43031	229.1 to 243.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	$8,340

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105211323	N B ST	E YOSEMITE AVE	5TH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43032	245.1 to 252.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
43033	253.5 to 254.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43011	254.3 to 255.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
43034	257.4 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
43035	268.7 to 295.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**

TOTAL COST FOR: NW *side of* **N B ST** *Starting at:* **E YOSEMITE AVE** **$89,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211146	N C ST	2ND ST	CENTRAL AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42830	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
42832	4.7 to 15.4 feet	Key Note Segment		5 ft	54			
42829	31.4 to 32.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
42831	40.9 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$22,020**

TOTAL COST FOR: NE *side of* **N C ST** *Starting at:* **2ND ST** **$23,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211102	N C ST	2ND ST	3RD ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42611	4.0 to 5.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
42612	7.8 to 8.8 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375
42626	19.2 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
42613	25.6 to 26.6 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
42627	37.3 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
42628	49.9 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
42614	93.1 to 94.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
42615	103.2 to 104.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
42616	109.0 to 110.0 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
42629	113.0 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
42630	116.0 to 123.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	$4,500
42617	116.4 to 117.4 feet	Vertical Change	-.81"	5 ft	5	REF		
42631	123.9 to 126.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
42632	126.9 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
42633	132.5 to 136.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,220
42618	138.5 to 139.5 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
42619	146.5 to 147.5 feet	Vertical Change	3.12"	5 ft	5	SF	$75	$375
42620	150.5 to 151.5 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
42634	177.3 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
42621	200.2 to 201.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
42622	208.4 to 209.4 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
42623	223.4 to 224.4 feet	Vertical Change	-1.67"	5 ft	5	SF	$75	$375
42635	224.9 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
42636	255.4 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$900
42637	265.2 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
42638	280.8 to 283.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
42624	288.9 to 289.9 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
42625	292.7 to 293.7 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211102	N C ST	2ND ST	3RD ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42639	296.0 to 299.3 feet		6.0-7.0%	5 ft	17			
42640	299.3 to 300.4 feet		8.0-9.0%	5 ft	5			

TOTAL COST FOR: SW *side of* **N C ST** *Starting at:* **2ND ST** **$34,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211144	N C ST	3RD ST	2ND ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42802	1.3 to 13.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
42803	18.6 to 26.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,740**
42804	26.5 to 27.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
42805	30.3 to 31.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
42806	36.3 to 52.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
42807	52.1 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
42808	69.7 to 75.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
42792	75.8 to 76.8 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
42809	77.9 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
42810	79.3 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
42811	94.2 to 99.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
42793	99.3 to 100.3 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
42794	102.3 to 103.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
42812	114.8 to 115.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
42813	118.0 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
42814	123.7 to 130.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
42815	130.8 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
42816	160.9 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
42796	165.2 to 166.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
42817	189.1 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
42797	200.9 to 201.9 feet	**Vertical Change**	.66"	5 ft	5	REF		
42818	201.3 to 202.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
42819	206.5 to 212.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
42820	212.5 to 214.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
42821	216.3 to 217.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
42822	220.2 to 221.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
42823	224.8 to 228.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
42824	233.0 to 240.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211144	N C ST	3RD ST	2ND ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42825	241.9 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
42798	255.0 to 256.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
42799	261.0 to 262.0 feet	**Vertical Change**	.51"	5 ft	5	REF		
42826	261.0 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
42827	268.5 to 279.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
42800	269.4 to 270.4 feet	**Vertical Change**	.85"	5 ft	5	REF		
42801	281.9 to 282.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
42828	282.6 to 287.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

TOTAL COST FOR: NE *side of* **N C ST** *Starting at:* **3RD ST** **$90,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211108	N C ST	3RD ST	4TH ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42645	27.5 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
42641	46.6 to 47.6 feet	**Vertical Change**	1.44"	5 ft	5	SF	$75	**$375**
42646	49.9 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
42647	64.5 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
42648	72.2 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
42649	83.0 to 88.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
42650	91.8 to 107.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
42651	109.3 to 116.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
42652	123.7 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
42653	130.8 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
42654	135.8 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
42655	137.9 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
42656	152.0 to 153.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
42667	155.9 to 165.8 feet	Key Note Segment		5 ft	50			
42657	166.3 to 176.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$1,980**
42658	178.8 to 184.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
42659	184.8 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
42668	192.2 to 207.8 feet	Key Note Segment		5 ft	78			
42642	198.8 to 199.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
42660	207.8 to 210.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
42661	213.8 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
42662	224.2 to 238.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
42663	240.9 to 245.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
42664	249.1 to 260.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
42665	262.2 to 265.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
42643	262.4 to 263.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
42669	269.0 to 271.7 feet		5.0-6.0%	5 ft	14			
42670	269.0 to 271.7 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211108	N C ST	3RD ST	4TH ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42671	271.7 to 272.7 feet		6.0-7.0%	5 ft	5			
42672	272.8 to 276.3 feet		5.0-6.0%	5 ft	18			
42673	272.8 to 276.3 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
42644	278.0 to 279.0 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
42666	283.3 to 292.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: SW *side of* **N C ST** *Starting at:* **3RD ST** **$80,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211136	N C ST	4TH ST	3RD ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42770	0.1 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
42771	14.3 to 20.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
42772	25.8 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
42773	35.0 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
42774	43.5 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
42775	53.3 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
42776	65.3 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
42789	75.4 to 103.1 feet	Key Note Segment		5 ft	138			
42777	103.1 to 106.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
42790	107.1 to 143.2 feet	Key Note Segment		5 ft	180			
42791	145.6 to 148.6 feet		7.0-8.0%	5 ft	15			
42778	145.9 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
42779	166.2 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
42780	176.0 to 182.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
42781	205.8 to 211.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
42782	211.0 to 228.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
42783	231.0 to 232.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
42784	237.3 to 243.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
42785	244.1 to 256.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
42769	244.5 to 245.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
42786	256.8 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
42787	266.5 to 277.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
42788	277.1 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**

TOTAL COST FOR: NE *side of* **N C ST** *Starting at:* **4TH ST** **$83,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211112	N C ST	4TH ST	5TH ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42677	10.3 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
42678	28.8 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
42679	53.3 to 57.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
42694	58.5 to 69.0 feet	Key Note Segment		5 ft	53			
42680	83.9 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
42681	103.8 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
42674	119.7 to 120.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
42682	140.5 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
42683	152.4 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
42684	170.3 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
42685	189.9 to 193.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
42686	193.9 to 198.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
42675	196.5 to 197.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
42687	203.3 to 204.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
42688	206.7 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
42689	213.3 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
42695	214.3 to 229.7 feet	Key Note Segment		5 ft	77			
42676	229.7 to 230.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
42690	229.7 to 233.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$720**
42691	234.8 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
42692	240.6 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
42696	257.6 to 275.1 feet	Key Note Segment		5 ft	88			
42693	280.8 to 286.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: SW *side of* **N C ST** *Starting at:* **4TH ST** **$68,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211133	N C ST	5TH ST	4TH ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42750	0.0 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	104	SF	$120	**$12,456**
42751	18.8 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	96	SF	$120	**$11,520**
42752	48.3 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
42753	56.3 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	9	SF	$120	**$1,080**
42754	58.5 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,688**
42755	70.6 to 96.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	157	SF	$120	**$18,864**
42766	102.0 to 109.2 feet	Key Note Segment		6 ft	43			
42756	109.2 to 116.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	46	SF	$40	**$1,848**
42747	114.5 to 115.5 feet	**Vertical Change**	-.35"	6 ft	6	REF		
42757	127.3 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
42758	130.8 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	162	SF	$120	**$19,440**
42748	144.9 to 145.9 feet	**Vertical Change**	-.29"	6 ft	6	REF		
42759	161.5 to 171.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	58	SF	$120	**$6,912**
42749	161.8 to 162.8 feet	**Vertical Change**	.32"	6 ft	6	REF		
42760	171.1 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,184**
42761	181.1 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	82	SF	$120	**$9,792**
42767	194.7 to 212.3 feet	Key Note Segment		6 ft	106			
42762	212.3 to 214.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	15	SF	$40	**$600**
42763	228.3 to 233.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
42768	241.1 to 248.3 feet	Key Note Segment		6 ft	43			
42764	255.1 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
42765	261.4 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	101	SF	$120	**$12,168**

TOTAL COST FOR: NE *side of* **N C ST** *Starting at:* **5TH ST** **$112,608.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211125	N C ST	5TH ST	E YOSEMITE AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42698	4.3 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
42699	23.4 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
42700	64.7 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
42697	64.8 to 65.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
42701	67.4 to 68.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
42702	70.8 to 75.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
42703	86.7 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
42704	113.5 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
42705	132.3 to 136.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
42717	137.8 to 159.8 feet	Key Note Segment		5 ft	110			
42706	159.8 to 162.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$540**
42707	165.4 to 200.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	174	SF	$120	**$20,880**
42708	201.0 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
42709	209.1 to 219.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
42710	221.5 to 225.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
42711	227.7 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
42712	232.7 to 233.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
42713	236.0 to 244.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
42714	246.4 to 259.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
42715	262.3 to 266.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
42716	270.3 to 274.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: SW *side of* **N C ST** *Starting at:* **5TH ST** **$73,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211058	N C ST	CENTRAL AVE	2ND ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42602	9.4 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
42609	16.4 to 33.1 feet	Key Note Segment		5 ft	84			
42603	33.8 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
42610	41.6 to 52.3 feet	Key Note Segment		5 ft	54			
42604	52.3 to 60.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	42	SF	$40	**$1,660**
42605	60.6 to 64.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
42600	63.1 to 64.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
42606	67.7 to 72.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
42607	72.9 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,740**
42601	91.3 to 92.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
42608	96.1 to 127.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,540**

TOTAL COST FOR: SW *side of* **N C ST** *Starting at:* **CENTRAL AVE** **$47,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211129	N C ST	E YOSEMITE AVE	5TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42721	35.3 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
42722	49.1 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
42723	59.7 to 70.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
42724	76.0 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
42725	80.0 to 103.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
42726	104.2 to 108.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
42727	111.9 to 121.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,580**
42728	121.4 to 128.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
42729	131.8 to 142.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
42730	147.1 to 153.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**
42731	154.8 to 158.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
42732	158.6 to 160.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
42733	160.0 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
42734	170.0 to 174.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
42739	176.5 to 209.6 feet	Key Note Segment		5 ft	166			
42719	182.8 to 183.8 feet	**Vertical Change**	.97"	5 ft	5	REF		
42720	194.4 to 195.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
42740	210.1 to 211.3 feet		5.0-6.0%	5 ft	6			
42741	211.3 to 213.8 feet		6.0-7.0%	5 ft	13			
42742	211.3 to 213.8 feet	Running Slope	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
42735	242.3 to 246.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
42736	258.4 to 259.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
42737	264.7 to 267.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
42738	276.8 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
42743	282.9 to 285.8 feet		5.0-6.0%	5 ft	15			
42744	282.9 to 285.8 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
42745	285.8 to 287.3 feet		6.0-7.0%	5 ft	8			
42746	287.3 to 288.3 feet		5.0-6.0%	5 ft	5			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211129	N C ST	E YOSEMITE AVE	5TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **N C ST** *Starting at:* **E YOSEMITE AVE**								**$73,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091408	N D ST	1132 N D ST	E CLEVELAND AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54610	0.0 to 9.4 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	66	SF	$120	**$7,896**
54601	2.6 to 6.4 feet	**Vertical Change**	.26"	7 ft	27	REF		
54602	10.6 to 11.6 feet	**Vertical Change**	.56"	7 ft	7	SF	$75	**$525**
54603	12.3 to 15.1 feet	**Vertical Change**	.27"	7 ft	20	REF		
54611	12.3 to 14.4 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	15	SF	$120	**$1,764**
54604	16.6 to 17.6 feet	**Vertical Change**	-.31"	7 ft	7	REF		
54612	17.2 to 25.1 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	55	SF	$120	**$6,636**
54605	20.3 to 21.3 feet	**Vertical Change**	-.94"	7 ft	7	REF		
54631	25.1 to 32.8 feet	Key Note Segment		7 ft	54			
54613	33.6 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**
54614	44.6 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	18	SF	$120	**$2,184**
54615	47.3 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	136	SF	$120	**$16,296**
54616	70.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	57	SF	$120	**$6,804**
54617	83.9 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	54	SF	$120	**$6,468**
54618	93.8 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	237	SF	$120	**$28,392**
54606	101.2 to 102.2 feet	**Vertical Change**	.36"	7 ft	7	REF		
54619	130.8 to 134.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	25	SF	$120	**$3,024**
54620	137.3 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**
54632	142.0 to 168.5 feet	Key Note Segment		7 ft	186			
54621	173.8 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	10	SF	$120	**$1,176**
54622	175.8 to 183.7 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	55	SF	$120	**$6,636**
54623	183.8 to 198.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	101	SF	$120	**$12,096**
54624	203.1 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,528**
54625	211.1 to 214.5 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	24	SF	$120	**$2,856**
54607	214.6 to 215.6 feet	**Vertical Change**	-.37"	7 ft	7	LF	$75	**$525**
54626	233.0 to 247.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	104	SF	$120	**$12,432**
54608	236.1 to 237.1 feet	**Vertical Change**	.27"	7 ft	7	REF		
54627	250.4 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091408	N D ST	1132 N D ST	E CLEVELAND AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54628	259.9 to 275.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	109	SF	$120	**$13,020**
54629	278.0 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	132	SF	$120	**$15,792**
54609	286.9 to 287.9 feet	**Vertical Change**	-.26"	7 ft	7	REF		
54630	297.8 to 307.4 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	67	SF	$120	**$8,064**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **1132 N D ST** **$159,138.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311303	N D ST	1327 N D ST	JAMES WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115345	1.1 to 20.0 feet	Key Note Segment		4 ft	76			
115339	22.4 to 32.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	38	SF	$120	**$4,608**
115338	31.7 to 32.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
115340	32.8 to 35.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,248**
115341	36.3 to 42.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
115342	42.5 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	87	SF	$120	**$10,416**
115343	65.6 to 69.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,920**
115344	72.5 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,032**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **1327 N D ST** **$25,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080926	N D ST	1ST ST	2ND ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44808	0.5 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
44809	3.3 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
44810	11.2 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
44811	19.6 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
44812	27.6 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
44813	32.3 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
44814	37.7 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
44815	45.7 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
44816	54.4 to 84.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	152	SF	$120	**$18,180**
44803	64.6 to 65.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
44804	84.2 to 85.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
44817	86.8 to 98.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,960**
44818	101.1 to 123.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
44819	123.7 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
44820	131.0 to 141.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
44821	142.8 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
44822	158.7 to 159.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
44823	159.8 to 172.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
44824	174.9 to 184.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
44805	180.4 to 181.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
44825	185.8 to 199.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
44826	204.2 to 211.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
44827	217.9 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
44806	219.0 to 220.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
44828	242.5 to 247.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
44829	254.8 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
44807	274.7 to 275.7 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
44830	281.4 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080926	N D ST	1ST ST	2ND ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44831	289.3 to 290.3 feet		5.0-6.0%	5 ft	5			
44832	290.3 to 292.0 feet		6.0-7.0%	5 ft	9			

TOTAL COST FOR: SW *side of* **N D ST** *Starting at:* **1ST ST** **$106,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081051	N D ST	2ND ST	CENTRAL AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45296	0.5 to 1.5 feet	Vertical Change	-.26"	5 ft	5	REF		
45303	0.9 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,220
45304	23.3 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
45305	37.6 to 56.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	$11,220
45297	48.6 to 49.6 feet	Vertical Change	.32"	5 ft	5	REF		
45306	56.5 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
45298	59.6 to 60.6 feet	Vertical Change	-.27"	5 ft	5	REF		
45307	59.8 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	$10,980
45308	78.3 to 84.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
45309	86.2 to 90.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	$2,460
45310	91.9 to 93.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
45311	93.0 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
45312	110.3 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
45313	112.8 to 119.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
45299	117.3 to 118.3 feet	Vertical Change	.38"	5 ft	5	REF		
45314	122.8 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
45315	128.8 to 134.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,660
45316	138.3 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
45331	154.9 to 163.6 feet	Key Note Segment		5 ft	44			
45317	183.3 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
45318	197.3 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
45319	216.6 to 218.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
45320	218.1 to 220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
45321	222.7 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
45332	234.4 to 251.7 feet	Key Note Segment		5 ft	87			
45300	242.2 to 243.2 feet	Vertical Change	-.26"	5 ft	5	REF		
45322	251.7 to 261.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	48	SF	$40	$1,920
45301	253.8 to 254.8 feet	Vertical Change	.63"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081051	N D ST	2ND ST	CENTRAL AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45323	268.9 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
45324	275.3 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45325	280.2 to 290.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
45302	285.9 to 286.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
45326	292.8 to 304.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
45327	304.6 to 307.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
45328	310.4 to 315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
45329	315.5 to 331.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
45330	331.9 to 345.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: NE *side of* **N D ST** *Starting at:* **2ND ST** **$108,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080933	N D ST	2ND ST	3RD ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44859	0.0 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
44860	11.0 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
44861	17.5 to 24.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
44862	26.9 to 32.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
44863	32.7 to 46.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,220**
44864	46.4 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
44865	56.0 to 72.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
44855	59.5 to 60.5 feet	**Vertical Change**	-.75"	5 ft	5	REF		
44866	75.3 to 81.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
44867	81.7 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
44868	89.9 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
44869	109.9 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
44870	116.9 to 119.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
44871	123.8 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
44872	134.5 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
44856	135.6 to 136.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
44873	151.9 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
44874	169.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
44875	204.3 to 208.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
44857	209.6 to 210.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
44876	211.3 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
44877	215.3 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
44885	244.0 to 253.3 feet	Key Note Segment		5 ft	47			
44858	252.9 to 253.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
44878	254.3 to 255.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
44879	255.8 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
44880	262.6 to 270.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
44881	272.5 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080933	N D ST	2ND ST	3RD ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44882	277.1 to 280.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
44883	284.3 to 290.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
44884	293.0 to 296.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: SW *side of* **N D ST** *Starting at:* **2ND ST** **$100,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081037	N D ST	3RD ST	2ND ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45241	0.3 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
45242	11.8 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45243	17.4 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45232	20.3 to 21.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
45233	27.2 to 28.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
45244	29.8 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45245	33.9 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45246	65.0 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45247	71.8 to 74.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
45234	81.9 to 82.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
45248	96.4 to 99.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
45249	99.8 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45236	146.5 to 147.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
45237	171.0 to 172.0 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
45250	173.3 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45238	174.5 to 175.5 feet	**Vertical Change**	.73"	5 ft	5	REF		
45251	177.8 to 179.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45239	181.6 to 182.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
45252	200.7 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
45240	218.3 to 219.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
45253	224.8 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
45254	227.4 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: NE *side of* **N D ST** *Starting at:* **3RD ST** **$23,445.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080952	N D ST	3RD ST	4TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44959	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
44960	3.8 to 10.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
44961	10.4 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
44962	18.3 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
44963	46.7 to 57.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
44964	59.8 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
44965	66.9 to 68.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
44966	68.9 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44967	72.8 to 83.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
44955	83.4 to 84.4 feet	**Vertical Change**	.63"	5 ft	5	REF		
44968	102.1 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
44969	117.8 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44970	122.6 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
44956	165.8 to 166.8 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
44971	180.7 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
44972	208.8 to 211.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
44973	213.0 to 215.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
44957	215.0 to 216.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
44974	223.5 to 232.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
44958	232.3 to 233.3 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
44975	233.9 to 236.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
44976	236.5 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
44977	242.2 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44978	251.8 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
44979	269.5 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
44980	274.6 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**

TOTAL COST FOR: SW *side of* **N D ST** *Starting at:* **3RD ST** **$83,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081012	N D ST	4TH ST	3RD ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45095	6.2 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
45114	9.2 to 23.3 feet	Key Note Segment		5 ft	71			
45096	23.6 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
45097	36.3 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
45098	87.4 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45099	93.4 to 95.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
45086	96.3 to 97.3 feet	**Vertical Change**	.92"	5 ft	5	REF		
45100	96.4 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
45087	99.9 to 100.9 feet	**Vertical Change**	3.17"	5 ft	5	REF		
45088	102.1 to 103.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
45101	103.1 to 108.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
45102	108.1 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
45089	110.7 to 111.7 feet	**Vertical Change**	1.42"	5 ft	5	REF		
45103	116.3 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
45090	121.4 to 122.4 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
45091	127.4 to 128.4 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
45104	129.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
45092	141.8 to 142.8 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
45105	154.7 to 159.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
45106	159.5 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
45107	185.3 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
45093	185.4 to 186.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
45108	195.0 to 197.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45109	207.9 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
45110	227.3 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
45111	240.6 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45112	244.4 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
45094	247.0 to 248.0 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081012	N D ST	4TH ST	3RD ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45113	265.3 to 268.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: NE *side of* **N D ST** *Starting at:* **4TH ST** **$67,005.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106080957	N D ST	4TH ST	5TH ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44983	37.3 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
44984	47.8 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
44985	57.2 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
44986	82.7 to 84.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
44987	86.4 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
44995	89.8 to 118.2 feet	Key Note Segment		5 ft	142			
44988	119.4 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
44981	120.8 to 121.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
44989	130.7 to 132.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
44990	134.8 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
44982	144.5 to 145.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
44991	150.1 to 152.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
44992	154.2 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,360**
44993	193.4 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
44996	217.2 to 279.3 feet	Key Note Segment		5 ft	311			
44994	280.0 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: SW *side of* **N D ST** *Starting at:* **4TH ST** **$74,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081008	N D ST	5TH ST	4TH ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45071	13.4 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
45065	26.7 to 27.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
45072	38.3 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
45083	69.1 to 89.8 feet	Key Note Segment		5 ft	104			
45073	92.3 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
45074	105.7 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
45084	120.8 to 143.8 feet	Key Note Segment		5 ft	115			
45075	144.8 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45076	148.8 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,820**
45077	176.9 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
45078	200.1 to 207.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
45079	209.8 to 226.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
45067	221.2 to 222.2 feet	**Vertical Change**	.8"	5 ft	5	REF		
45068	229.3 to 230.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
45080	247.3 to 249.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
45069	251.4 to 252.4 feet	**Vertical Change**	.82"	5 ft	5	SF	$75	**$375**
45081	266.3 to 272.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
45070	270.8 to 271.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
45082	280.4 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
45085	282.2 to 283.5 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: NE *side of* **N D ST** *Starting at:* **5TH ST** **$68,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081001	N D ST	5TH ST	E YOSEMITE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45005	1.7 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45006	5.2 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
45007	6.8 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
44997	12.7 to 13.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
45008	24.8 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
45009	43.8 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
44998	52.4 to 53.4 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
45029	60.2 to 77.0 feet	Key Note Segment		5 ft	84			
44999	60.7 to 61.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
45010	81.3 to 83.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
45011	85.8 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
45030	94.3 to 107.7 feet	Key Note Segment		5 ft	67			
45012	108.9 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45013	112.7 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
45014	133.1 to 135.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
45031	135.4 to 149.4 feet	Key Note Segment		5 ft	70			
45015	150.7 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45016	164.2 to 170.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
45017	182.8 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
45018	199.9 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45000	203.8 to 204.8 feet	**Vertical Change**	.52"	5 ft	5	REF		
45019	203.8 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
45020	220.3 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
45021	230.1 to 234.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
45022	240.0 to 241.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
45023	241.3 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
45001	249.1 to 250.1 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
45002	256.7 to 257.7 feet	**Vertical Change**	.56"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081001	N D ST	5TH ST	E YOSEMITE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45024	257.3 to 266.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,460**
45025	269.2 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
45003	271.2 to 272.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
45026	277.1 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
45004	278.0 to 279.0 feet	**Vertical Change**	1.24"	5 ft	5	REF		
45027	281.2 to 282.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
45028	284.0 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: SW *side of* **N D ST** *Starting at:* **5TH ST** **$64,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311248	N D ST	ADELL ST	ASTI WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115212	0.0 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	153	SF	$120	**$18,384**
115199	18.6 to 19.6 feet	**Vertical Change**	.46"	4 ft	4	REF		
115200	38.2 to 39.2 feet	**Vertical Change**	.51"	4 ft	4	REF		
115213	41.0 to 42.1 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
115214	42.1 to 43.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$576**
115215	45.8 to 49.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
115201	48.4 to 49.4 feet	**Vertical Change**	.43"	4 ft	4	REF		
115216	87.3 to 109.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	90	SF	$120	**$10,752**
115202	102.1 to 103.1 feet	**Vertical Change**	.45"	4 ft	4	REF		
115203	108.9 to 109.9 feet	**Vertical Change**	-.36"	4 ft	4	REF		
115233	110.3 to 129.8 feet	Key Note Segment		4 ft	78			
115217	131.5 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
115204	134.0 to 135.0 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
115234	134.8 to 153.0 feet	Key Note Segment		4 ft	73			
115205	153.7 to 154.7 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
115218	155.5 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
115219	163.9 to 168.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,112**
115220	168.7 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
115221	177.3 to 188.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,568**
115239	184.5 to 185.5 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
115206	188.0 to 189.0 feet	**Vertical Change**	.75"	4 ft	4	REF		
115222	188.9 to 203.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	58	SF	$120	**$6,912**
115207	201.3 to 202.3 feet	**Vertical Change**	.78"	4 ft	4	REF		
115223	203.8 to 205.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
115224	207.5 to 213.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$2,976**
115235	213.8 to 234.3 feet	Key Note Segment		4 ft	82			
115208	218.7 to 219.7 feet	**Vertical Change**	.98"	4 ft	4	REF		
115236	237.9 to 257.8 feet	Key Note Segment		4 ft	80			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311248	N D ST	ADELL ST	ASTI WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115209	247.3 to 248.3 feet	Vertical Change	.29"	4 ft	4	REF		
115210	257.9 to 258.9 feet	Vertical Change	-.41"	4 ft	4	REF		
115225	259.5 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
115226	267.5 to 278.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
115227	281.7 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,168**
115228	288.3 to 303.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	62	SF	$120	**$7,440**
115229	304.8 to 316.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
115237	318.3 to 338.2 feet	Key Note Segment		4 ft	80			
115211	338.1 to 339.1 feet	Vertical Change	.28"	4 ft	4	REF		
115230	340.1 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
115238	342.9 to 362.1 feet	Key Note Segment		4 ft	77			
115231	365.8 to 367.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
115232	370.2 to 376.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **ADELL ST** **$87,483.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311308	N D ST	ASHLAN WAY	E CLARK ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115368	0.9 to 6.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,688**
115364	3.6 to 4.6 feet	**Vertical Change**	.3"	4 ft	4	REF		
115369	8.9 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**
115370	11.8 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	157	SF	$120	**$18,816**
115365	47.6 to 48.6 feet	**Vertical Change**	.27"	4 ft	4	REF		
115371	53.1 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,696**
115372	64.3 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,792**
115373	73.3 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
115374	77.2 to 93.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	**$7,680**
115375	93.9 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
115376	122.5 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
115377	125.8 to 136.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$5,088**
115378	138.7 to 152.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,816**
115367	150.5 to 151.5 feet	**Vertical Change**	.5"	4 ft	4	REF		
115379	150.6 to 151.6 feet	**Continuous Width**	20"	4 ft	4	SF	$120	**$480**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **ASHLAN WAY** **$57,984.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311300	N D ST	ASHLAN WAY	W SHERWOOD WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115302	0.3 to 6.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,120**
115303	6.8 to 11.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,112**
115304	11.2 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
115305	23.5 to 28.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,160**
115331	28.0 to 50.0 feet	Key Note Segment		4 ft	88			
115291	47.5 to 48.5 feet	**Vertical Change**	2.1"	4 ft	4	REF		
115306	53.5 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
115332	56.1 to 73.8 feet	Key Note Segment		4 ft	71			
115292	56.3 to 57.3 feet	**Vertical Change**	.26"	4 ft	4	REF		
115293	75.0 to 76.0 feet	**Vertical Change**	-.34"	4 ft	4	LF	$75	**$300**
115307	84.9 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
115308	93.5 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
115294	96.4 to 97.4 feet	**Vertical Change**	.32"	4 ft	4	REF		
115309	101.8 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
115310	111.1 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
115311	118.3 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
115312	131.8 to 139.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,648**
115333	139.4 to 156.8 feet	Key Note Segment		4 ft	70			
115295	164.7 to 165.7 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
115334	166.1 to 183.3 feet	Key Note Segment		4 ft	69			
115313	185.1 to 187.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
115314	197.4 to 206.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,224**
115315	212.7 to 223.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
115316	227.1 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
115317	234.5 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
115297	240.3 to 241.3 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
115335	244.8 to 262.5 feet	Key Note Segment		4 ft	71			
115318	264.6 to 270.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,736**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311300	N D ST	ASHLAN WAY	W SHERWOOD WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115319	270.9 to 276.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
115336	276.4 to 295.8 feet	Key Note Segment		4 ft	78			
115298	285.1 to 286.1 feet	**Vertical Change**	3.46"	4 ft	4	REF		
115299	292.2 to 293.2 feet	**Vertical Change**	-.29"	4 ft	4	REF		
115320	301.1 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
115321	310.8 to 323.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	52	SF	$120	**$6,240**
115322	324.6 to 331.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
115323	334.8 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
115324	345.3 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
115300	354.8 to 355.8 feet	**Vertical Change**	1.91"	4 ft	4	SF	$75	**$300**
115337	355.9 to 373.3 feet	Key Note Segment		4 ft	70			
115325	379.8 to 389.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,704**
115326	400.8 to 406.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
115327	421.9 to 425.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
115328	429.8 to 441.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
115329	444.6 to 448.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,728**
115330	448.4 to 475.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	109	SF	$120	**$13,056**
115301	452.7 to 453.7 feet	**Vertical Change**	-.42"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **ASHLAN WAY** **$97,344.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311255	N D ST	ASTI WAY	ASHLAN WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115250	0.0 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	19	SF	$120	**$2,304**
115251	6.9 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
115252	22.1 to 23.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$816**
115278	23.8 to 43.2 feet	Key Note Segment		4 ft	78			
115253	46.1 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
115254	48.7 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
115279	49.9 to 68.1 feet	Key Note Segment		4 ft	73			
115255	86.0 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
115256	100.1 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	103	SF	$120	**$12,336**
115280	126.6 to 146.6 feet	Key Note Segment		4 ft	80			
115257	149.0 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
115281	152.7 to 171.5 feet	Key Note Segment		4 ft	75			
115258	175.4 to 198.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	94	SF	$120	**$11,232**
115240	198.1 to 199.1 feet	**Vertical Change**	.3"	4 ft	4	REF		
115259	198.8 to 200.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
115260	204.8 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
115261	209.4 to 212.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,344**
115262	214.4 to 222.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	33	SF	$120	**$3,984**
115263	225.7 to 229.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,920**
115282	231.3 to 250.7 feet	Key Note Segment		4 ft	78			
115283	256.3 to 275.0 feet	Key Note Segment		4 ft	75			
115241	257.6 to 258.6 feet	**Vertical Change**	.34"	4 ft	4	REF		
115264	277.7 to 285.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	**$3,888**
115265	289.0 to 330.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	164	SF	$120	**$19,680**
115266	330.0 to 333.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
115284	334.3 to 353.3 feet	Key Note Segment		4 ft	76			
115267	355.5 to 356.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
115285	358.4 to 377.8 feet	Key Note Segment		4 ft	78			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311255	N D ST	ASTI WAY	ASHLAN WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115242	378.8 to 379.8 feet	Vertical Change	.45"	4 ft	4	LF	$75	$300
115268	383.2 to 387.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	17	SF	$120	$2,016
115269	390.5 to 394.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	$1,920
115270	394.5 to 437.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	170	SF	$120	$20,400
115243	429.2 to 430.2 feet	Vertical Change	-.26"	4 ft	4	REF		
115244	437.8 to 438.8 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
115286	438.0 to 456.5 feet	Key Note Segment		4 ft	74			
115271	459.8 to 460.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
115287	461.6 to 481.0 feet	Key Note Segment		4 ft	78			
115245	483.2 to 484.2 feet	Vertical Change	.31"	4 ft	4	REF		
115272	483.5 to 508.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	98	SF	$120	$11,808
115246	515.2 to 516.2 feet	Vertical Change	.28"	4 ft	4	LF	$75	$300
115288	516.8 to 533.2 feet	Key Note Segment		4 ft	66			
115247	532.6 to 533.6 feet	Vertical Change	-.45"	4 ft	4	REF		
115273	540.4 to 562.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	$10,560
115274	565.3 to 567.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	$1,056
115275	573.3 to 592.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	$8,976
115248	577.0 to 578.0 feet	Vertical Change	-.3"	4 ft	4	REF		
115289	592.0 to 610.5 feet	Key Note Segment		4 ft	74			
115276	612.5 to 615.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	$1,440
115290	619.0 to 636.5 feet	Key Note Segment		4 ft	70			
115277	639.2 to 667.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	113	SF	$120	$13,584
115249	662.2 to 663.2 feet	Vertical Change	.39"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **ASTI WAY** **$148,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106080915	N D ST	CENTRAL AVE	1ST ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44760	0.7 to 1.7 feet	Vertical Change	-.33"	5 ft	5	REF		
44761	0.7 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
44762	18.8 to 20.9 feet		6.0-7.0%	5 ft	11			

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **CENTRAL AVE** **$12,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091412	N D ST	E CLEVELAND AVE	1115 N D ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54635	1.2 to 36.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	178	SF	$120	**$21,300**
54636	36.7 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
54644	53.5 to 74.7 feet	Key Note Segment		5 ft	106			
54637	75.6 to 76.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
54638	86.8 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
54639	94.5 to 100.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
54645	102.0 to 123.2 feet	Key Note Segment		5 ft	106			
54633	111.0 to 112.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
54640	124.2 to 133.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
54641	136.1 to 143.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
54646	143.8 to 160.3 feet	Key Note Segment		5 ft	83			
54642	160.3 to 161.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
54643	161.7 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
54634	166.1 to 167.1 feet	**Vertical Change**	-.8"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **E CLEVELAND AVE** **$55,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021634	N D ST	E CLEVELAND AVE	E RUSH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119124	0.8 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
119125	4.7 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
119126	11.6 to 16.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
119146	17.3 to 39.8 feet	Key Note Segment		5 ft	112			
119127	39.9 to 42.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
119128	44.3 to 53.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
119129	53.6 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
119147	65.6 to 84.7 feet	Key Note Segment		5 ft	96			
119130	85.8 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119131	95.7 to 106.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
119148	107.1 to 127.1 feet	Key Note Segment		5 ft	100			
119149	128.1 to 140.7 feet	Key Note Segment		5 ft	63			
119132	141.7 to 152.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
119133	154.8 to 163.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
119150	164.7 to 181.8 feet	Key Note Segment		5 ft	86			
119122	178.6 to 179.6 feet	**Vertical Change**	2.67"	5 ft	5	REF		
119134	181.8 to 182.9 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$220**
119135	184.9 to 193.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
119136	197.1 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
119137	222.5 to 240.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
119123	237.9 to 238.9 feet	**Vertical Change**	2.25"	5 ft	5	REF		
119138	240.2 to 246.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
119139	246.5 to 247.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
119140	250.4 to 267.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
119141	267.5 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
119151	277.3 to 303.2 feet	Key Note Segment		5 ft	130			
119142	303.2 to 305.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
119143	310.7 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021634	N D ST	E CLEVELAND AVE	E RUSH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119144	325.4 to 327.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
119145	329.5 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **E CLEVELAND AVE** **$101,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021622	N D ST	E LINCOLN AVE	RUSH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119043	0.0 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
119044	25.5 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
119045	42.8 to 44.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
119046	44.4 to 49.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,820**
119047	50.3 to 51.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
119048	53.0 to 54.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
119049	55.1 to 83.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	142	SF	$120	**$17,040**
119050	84.0 to 90.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
119078	90.7 to 113.3 feet	Key Note Segment		5 ft	113			
119036	113.8 to 114.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
119051	123.8 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
119052	128.5 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
119053	132.4 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
119037	135.4 to 136.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
119054	142.9 to 144.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
119038	143.7 to 144.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
119055	145.9 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
119039	150.3 to 151.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
119040	159.1 to 160.1 feet	**Vertical Change**	-.67"	5 ft	5	SF	$75	**$375**
119079	167.1 to 179.8 feet	Key Note Segment		5 ft	64			
119056	179.8 to 185.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,080**
119057	200.8 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119080	202.2 to 213.0 feet	Key Note Segment		5 ft	54			
119058	213.1 to 219.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
119059	231.4 to 238.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
119041	235.3 to 236.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119060	241.6 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
119061	268.3 to 274.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021622	N D ST	E LINCOLN AVE	RUSH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119062	276.3 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119081	282.3 to 290.9 feet	Key Note Segment		5 ft	43			
119063	292.9 to 295.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
119064	298.8 to 301.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**
119082	302.2 to 310.8 feet	Key Note Segment		5 ft	43			
119065	314.0 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
119066	325.4 to 327.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
119067	328.8 to 336.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
119068	341.0 to 348.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
119069	349.1 to 353.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
119070	353.3 to 361.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
119071	363.2 to 366.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
119072	366.1 to 376.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,360**
119073	376.7 to 381.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
119074	382.4 to 384.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
119042	387.9 to 388.9 feet	**Vertical Change**	1.19"	5 ft	5	SF	$75	**$375**
119075	389.2 to 390.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
119076	390.4 to 392.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
119077	395.8 to 401.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	26	SF	$120	**$3,120**
119083	399.3 to 400.7 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **E LINCOLN AVE** **$132,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031508	N D ST	E LINCOLN AVE	W SOUTH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120742	0.4 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
120743	22.4 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
120744	31.2 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
120760	39.7 to 49.0 feet	Key Note Segment		5 ft	46			
120745	56.8 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
120736	64.5 to 65.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
120746	66.7 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
120737	67.7 to 68.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
120761	70.3 to 82.2 feet	Key Note Segment		5 ft	60			
120747	83.4 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
120748	86.4 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
120762	96.3 to 106.0 feet	Key Note Segment		5 ft	49			
120749	106.8 to 129.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
120750	129.0 to 135.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
120751	138.2 to 153.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
120738	140.8 to 141.8 feet	**Vertical Change**	1.9"	5 ft	5	REF		
120752	154.8 to 162.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
120763	163.9 to 173.8 feet	Key Note Segment		5 ft	50			
120753	177.8 to 183.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
120754	188.1 to 196.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
120755	200.5 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
120756	210.3 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
120757	224.9 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
120764	248.9 to 280.6 feet	Key Note Segment		5 ft	159			
120739	265.0 to 266.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
120740	279.8 to 280.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
120758	286.1 to 287.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
120759	289.8 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031508	N D ST	E LINCOLN AVE	W SOUTH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120741	326.8 to 327.8 feet	Vertical Change	.47"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **E LINCOLN AVE** **$76,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021639	N D ST	E RUSH ST	E LINCOLN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119157	0.7 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
119158	6.4 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119159	9.3 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
119173	24.2 to 32.0 feet	Key Note Segment		5 ft	39			
119152	33.0 to 34.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
119174	36.9 to 46.2 feet	Key Note Segment		5 ft	47			
119153	46.7 to 47.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
119160	52.3 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
119161	78.8 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
119175	89.3 to 100.3 feet	Key Note Segment		5 ft	55			
119162	100.6 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
119163	120.8 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
119164	129.6 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
119165	149.1 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
119166	156.2 to 160.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
119167	162.8 to 164.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
119176	164.2 to 175.3 feet	Key Note Segment		5 ft	56			
119168	176.2 to 182.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
119169	182.8 to 199.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
119177	230.8 to 239.3 feet	Key Note Segment		5 ft	43			
119155	237.0 to 238.0 feet	**Vertical Change**	1.55"	5 ft	5	REF		
119178	249.9 to 263.8 feet	Key Note Segment		5 ft	70			
119170	263.8 to 280.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	84	SF	$40	**$3,360**
119179	281.3 to 309.4 feet	Key Note Segment		5 ft	140			
119171	310.2 to 329.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,400**
119180	329.8 to 360.9 feet	Key Note Segment		5 ft	156			
119172	364.1 to 398.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
119156	379.9 to 380.9 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021639	N D ST	E RUSH ST	E LINCOLN AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**W**	*side of* **N D ST**	*Starting at:* **E RUSH ST**					**$95,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081005	N D ST	E YOSEMITE AVE	5TH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45037	0.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
45038	6.8 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
45032	10.0 to 11.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
45039	12.8 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
45040	15.2 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45041	18.8 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
45042	26.4 to 45.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
45033	42.9 to 43.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
45062	46.0 to 65.0 feet	Key Note Segment		5 ft	95			
45034	47.1 to 48.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
45043	66.8 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
45035	67.9 to 68.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
45044	70.7 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
45045	77.2 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45063	81.7 to 103.8 feet	Key Note Segment		5 ft	111			
45036	82.2 to 83.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
45046	103.8 to 106.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
45047	109.3 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
45048	125.8 to 134.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
45049	140.2 to 141.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
45064	142.0 to 165.6 feet	Key Note Segment		5 ft	118			
45050	167.4 to 168.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
45051	175.1 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
45052	180.3 to 194.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
45053	195.3 to 197.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
45054	202.8 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
45055	215.9 to 242.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
45056	244.6 to 245.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081005	N D ST	E YOSEMITE AVE	5TH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45057	253.3 to 256.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
45058	269.2 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
45059	286.5 to 292.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
45060	293.3 to 295.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
45061	295.4 to 297.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: NE *side of* **N D ST** *Starting at:* **E YOSEMITE AVE** **$90,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311306	N D ST	JAMES WAY	ASHLAN WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115347	0.8 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
115348	5.8 to 19.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	53	SF	$120	**$6,336**
115349	19.2 to 24.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	22	SF	$120	**$2,592**
115350	25.0 to 41.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	67	SF	$120	**$8,064**
115351	42.8 to 45.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
115352	48.5 to 60.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,520**
115346	60.6 to 61.6 feet	**Vertical Change**	2.69"	4 ft	4	SF	$75	**$300**
115353	62.4 to 65.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
115354	68.5 to 70.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
115355	72.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
115356	80.0 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,600**
115357	92.8 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
115358	101.2 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
115359	104.4 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	96	SF	$120	**$11,472**
115360	129.4 to 133.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,872**
115361	135.7 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,408**
115362	142.8 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
115363	148.3 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **JAMES WAY** **$62,556.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031259	N D ST	RIVERSIDE DR	W SOUTH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120198	0.0 to 5.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
120195	7.3 to 8.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
120199	7.7 to 40.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,680**
120200	42.6 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
120227	44.7 to 57.1 feet	Key Note Segment		5 ft	62			
120201	60.5 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
120202	85.7 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
120228	100.8 to 131.1 feet	Key Note Segment		5 ft	152			
120203	132.4 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
120204	141.0 to 143.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
120229	143.8 to 158.8 feet	Key Note Segment		5 ft	75			
120196	153.1 to 154.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
120205	160.4 to 161.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120206	179.5 to 188.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
120207	191.5 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120208	194.8 to 210.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
120209	217.3 to 227.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
120210	228.8 to 230.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
120211	237.5 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
120212	243.7 to 245.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
120213	249.1 to 252.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
120230	255.3 to 273.4 feet	Key Note Segment		5 ft	90			
120214	274.2 to 275.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
120215	275.8 to 298.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
120197	290.3 to 291.3 feet	**Vertical Change**	.69"	5 ft	5	REF		
120216	304.8 to 307.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
120217	311.5 to 317.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
120218	336.8 to 347.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031259	N D ST	RIVERSIDE DR	W SOUTH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120219	350.8 to 353.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
120220	356.9 to 360.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
120221	364.2 to 379.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
120222	381.8 to 412.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
120231	412.9 to 448.2 feet	Key Note Segment		5 ft	177			
120223	450.3 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
120224	454.9 to 458.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
120225	459.9 to 467.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
120226	470.5 to 483.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **RIVERSIDE DR** **$153,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041105	N D ST	RIVERSIDE DR	W CENTRAL AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121167	9.3 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
121159	49.3 to 50.3 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
121160	61.7 to 62.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
121161	115.8 to 116.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
121162	140.1 to 141.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
121168	180.3 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
121163	185.7 to 186.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
121174	194.7 to 196.5 feet		5.0-6.0%	5 ft	9			
121169	206.5 to 221.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
121164	208.3 to 209.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
121170	222.4 to 256.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	169	SF	$120	**$20,280**
121171	256.7 to 270.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
121165	258.3 to 259.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
121166	261.8 to 262.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
121172	273.3 to 288.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
121173	289.6 to 291.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **RIVERSIDE DR** **$54,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021630	N D ST	RUSH ST	E CLEVELAND AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119100	2.8 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119101	13.1 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
119114	21.4 to 44.8 feet	Key Note Segment		5 ft	117			
119102	50.2 to 55.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
119103	59.3 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
119115	81.3 to 89.8 feet	Key Note Segment		5 ft	43			
119095	91.8 to 92.8 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
119116	100.2 to 108.6 feet	Key Note Segment		5 ft	42			
119104	122.9 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
119096	129.6 to 130.6 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
119097	136.2 to 137.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
119117	141.7 to 149.5 feet	Key Note Segment		5 ft	39			
119121	151.5 to 153.3 feet		5.0-6.0%	5 ft	9			
119105	153.3 to 158.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
119106	162.3 to 178.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,660**
119118	178.4 to 199.7 feet	Key Note Segment		5 ft	107			
119107	199.9 to 202.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	13	SF	$40	**$520**
119108	204.8 to 216.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,140**
119109	218.9 to 233.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
119110	235.2 to 248.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
119111	253.3 to 256.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
119112	257.0 to 265.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
119119	265.4 to 308.5 feet	Key Note Segment		5 ft	216			
119098	309.3 to 310.3 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
119120	311.6 to 329.5 feet	Key Note Segment		5 ft	89			
119099	329.2 to 330.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119113	329.5 to 335.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	28	SF	$40	**$1,120**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **RUSH ST** **$66,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041102	N D ST	W CENTRAL AVE	E RIVERSIDE DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121150	4.1 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
121151	12.2 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
121152	20.2 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,560**
121153	53.3 to 58.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
121154	58.0 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
121147	91.0 to 92.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
121155	91.8 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
121156	132.2 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
121157	206.0 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121148	220.9 to 221.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
121149	286.6 to 287.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
121158	291.8 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: E *side of* **N D ST** *Starting at:* **W CENTRAL AVE** **$47,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091354	N D ST	W SHERWOOD WAY	GREEN WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54508	1.3 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
54509	4.9 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,380**
54510	14.3 to 17.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
54511	18.1 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
54512	49.2 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
54513	55.8 to 57.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
54514	60.5 to 69.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,460**
54515	70.5 to 72.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
54516	72.0 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
54517	84.3 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
54518	86.3 to 90.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
54499	93.1 to 94.1 feet	**Vertical Change**	.63"	5 ft	5	REF		
54519	93.4 to 94.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
54520	94.5 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
54521	113.0 to 116.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
54522	116.5 to 117.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
54523	118.4 to 131.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,740**
54500	119.1 to 120.1 feet	**Vertical Change**	-.65"	5 ft	5	REF		
54524	134.0 to 137.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
54525	138.2 to 141.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
54501	140.6 to 141.6 feet	**Vertical Change**	.66"	5 ft	5	REF		
54526	141.7 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
54527	150.8 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
54528	157.6 to 164.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
54502	162.1 to 163.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
54529	164.8 to 172.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	40	SF	$120	**$4,740**
54503	170.7 to 171.7 feet	**Vertical Change**	-.49"	5 ft	5	REF		
54530	172.7 to 178.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091354	N D ST	W SHERWOOD WAY	GREEN WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54531	181.3 to 184.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
54532	187.2 to 192.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
54533	192.1 to 196.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
54534	196.5 to 208.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
54535	208.9 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
54536	218.8 to 224.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
54537	225.7 to 241.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
54538	241.8 to 249.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
54539	249.3 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,200**
54504	299.5 to 300.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
54540	311.0 to 314.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
54541	316.6 to 328.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
54505	316.9 to 317.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
54506	325.5 to 326.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
54542	329.0 to 332.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
54543	335.9 to 346.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
54507	342.7 to 343.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
54544	346.4 to 354.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
54545	355.9 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **W SHERWOOD WAY** **$188,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031505	N D ST	W SOUTH ST	E LINCOLN AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120714	0.0 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
120732	15.0 to 38.7 feet	Key Note Segment		5 ft	119			
120715	42.7 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
120707	59.2 to 60.2 feet	**Vertical Change**	1.91"	5 ft	5	SF	$75	**$375**
120716	60.7 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
120717	80.3 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
120733	86.2 to 95.7 feet	Key Note Segment		5 ft	48			
120718	99.2 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
120735	105.1 to 106.1 feet		7.0-8.0%	5 ft	5			
120709	110.2 to 111.2 feet	**Vertical Change**	-.7"	5 ft	5	SF	$75	**$375**
120734	111.2 to 126.8 feet	Key Note Segment		5 ft	78			
120719	129.8 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
120720	139.3 to 145.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
120721	155.0 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
120710	173.4 to 174.4 feet	**Vertical Change**	.72"	5 ft	5	REF		
120722	177.3 to 180.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
120723	180.3 to 189.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
120711	184.1 to 185.1 feet	**Vertical Change**	1.38"	5 ft	5	REF		
120724	189.7 to 202.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
120725	202.5 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
120712	234.7 to 235.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
120726	237.8 to 270.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,440**
120727	272.4 to 287.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
120728	289.7 to 295.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
120729	296.9 to 305.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
120730	306.1 to 345.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	197	SF	$120	**$23,640**
120731	345.5 to 349.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120713	349.6 to 350.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031505	N D ST	W SOUTH ST	E LINCOLN AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **N D ST**	*Starting at:* **W SOUTH ST**						**$142,545.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031254	N D ST	W SOUTH ST	RIVERSIDE DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120153	0.0 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
120145	3.4 to 4.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
120154	17.3 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
120155	22.1 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,620**
120156	40.3 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
120157	52.2 to 57.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
120146	55.6 to 56.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
120158	57.6 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
120159	72.4 to 83.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
120160	85.4 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
120191	94.8 to 122.4 feet	Key Note Segment		5 ft	138			
120161	124.2 to 141.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
120147	143.2 to 144.2 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
120162	146.5 to 152.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
120163	156.0 to 165.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
120148	159.9 to 160.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
120164	165.6 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
120165	183.1 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
120166	192.7 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
120167	200.1 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
120168	204.9 to 206.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
120192	206.3 to 224.3 feet	Key Note Segment		5 ft	90			
120169	226.1 to 227.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
120170	229.4 to 250.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
120171	250.8 to 254.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
120172	255.0 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
120173	265.1 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
120174	274.6 to 276.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031254	N D ST	W SOUTH ST	RIVERSIDE DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120149	274.7 to 275.7 feet	Vertical Change	.55"	5 ft	5	REF		
120175	278.5 to 280.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
120176	283.3 to 287.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
120177	287.7 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120193	292.3 to 302.8 feet	Key Note Segment		5 ft	53			
120178	303.2 to 306.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	**$580**
120179	308.8 to 310.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
120180	311.2 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
120181	344.8 to 347.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
120182	347.3 to 349.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
120183	352.4 to 353.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
120184	362.7 to 366.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120185	368.8 to 378.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
120186	378.1 to 382.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
120150	380.4 to 381.4 feet	Vertical Change	-.37"	5 ft	5	REF		
120187	398.1 to 399.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120194	399.3 to 411.6 feet	Key Note Segment		5 ft	62			
120151	404.5 to 405.5 feet	Vertical Change	.27"	5 ft	5	REF		
120188	413.4 to 415.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
120189	461.9 to 467.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
120190	471.1 to 492.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
120152	486.1 to 487.1 feet	Vertical Change	-.49"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N D ST** *Starting at:* **W SOUTH ST** **$173,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081058	N E ST	1ST ST	CENTRAL AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45333	5.2 to 6.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
45342	15.9 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
45343	31.5 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
45334	45.5 to 46.5 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375
45335	54.3 to 55.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
45336	80.5 to 81.5 feet	Vertical Change	.36"	5 ft	5	REF		
45344	80.7 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
45359	83.9 to 100.7 feet	Key Note Segment		5 ft	84			
45345	102.4 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
45337	103.3 to 104.3 feet	Vertical Change	.37"	5 ft	5	REF		
45346	110.5 to 111.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
45347	111.7 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
45348	123.3 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
45349	133.8 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,620
45350	144.3 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,740
45338	153.0 to 154.0 feet	Vertical Change	-.29"	5 ft	5	REF		
45351	162.5 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
45352	181.5 to 184.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
45353	185.4 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
45360	187.7 to 217.3 feet	Key Note Segment		5 ft	148			
45354	219.0 to 220.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
45355	222.8 to 224.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$900
45339	238.5 to 239.5 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
45340	247.7 to 248.7 feet	Vertical Change	.56"	5 ft	5	SF	$75	$375
45356	252.3 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
45357	262.3 to 266.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
45358	269.9 to 280.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
45341	272.9 to 273.9 feet	Vertical Change	.55"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081058	N E ST	1ST ST	CENTRAL AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **1ST ST**								**$53,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081117	N E ST	216 N E ST	E YOSEMITE AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45394	2.5 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45395	5.8 to 7.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
45396	9.4 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
45397	26.4 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45434	33.8 to 55.8 feet	Key Note Segment		5 ft	110			
45398	56.0 to 76.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	104	SF	$40	**$4,140**
45399	80.5 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45400	90.0 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45401	94.2 to 95.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45402	99.6 to 103.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
45403	106.1 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
45389	115.3 to 116.3 feet	**Vertical Change**	1.68"	5 ft	5	REF		
45404	154.2 to 155.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45435	155.6 to 182.5 feet	Key Note Segment		5 ft	135			
45390	201.3 to 202.3 feet	**Vertical Change**	-.92"	5 ft	5	SF	$75	**$375**
45405	204.1 to 206.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
45436	242.2 to 259.8 feet	Key Note Segment		5 ft	88			
45406	265.6 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
45407	273.9 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
45408	280.4 to 287.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
45409	297.7 to 298.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45410	302.8 to 305.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45411	319.5 to 322.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
45412	322.0 to 323.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
45413	324.3 to 332.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
45414	334.2 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45415	338.1 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
45416	344.0 to 348.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081117	N E ST	216 N E ST	E YOSEMITE AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45417	350.7 to 359.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
45418	363.6 to 364.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45419	366.8 to 368.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
45420	369.7 to 379.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
45421	380.2 to 383.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
45422	390.4 to 398.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
45423	405.4 to 409.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
45437	411.0 to 433.2 feet	Key Note Segment		5 ft	111			
45424	433.2 to 439.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,160**
45425	441.3 to 444.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
45426	450.3 to 452.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
45427	456.5 to 458.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
45428	461.7 to 464.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
45429	466.4 to 475.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
45430	478.8 to 479.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45391	479.0 to 480.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
45431	490.5 to 498.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
45432	504.3 to 507.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
45392	515.3 to 516.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
45393	520.6 to 521.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
45433	521.2 to 522.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: SW *side of* **N E ST** *Starting at:* **216 N E ST** **$116,630.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081140	N E ST	2ND ST	1ST ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45574	1.1 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,660**
45575	12.2 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
45576	38.2 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,860**
45566	40.7 to 41.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
45567	50.6 to 51.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
45577	59.3 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
45578	65.4 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45579	73.6 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
45568	74.3 to 75.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
45569	83.8 to 84.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
45580	93.0 to 96.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
45581	101.3 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
45582	110.4 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
45583	124.4 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
45584	131.2 to 137.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
45585	137.9 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
45586	144.2 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
45587	149.3 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45588	154.5 to 156.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
45599	157.3 to 182.8 feet	Key Note Segment		5 ft	127			
45570	167.2 to 168.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
45571	182.2 to 183.2 feet	**Vertical Change**	-.57"	5 ft	5	REF		
45589	185.2 to 202.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,260**
45590	203.2 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
45600	217.7 to 226.3 feet	Key Note Segment		5 ft	43			
45572	218.4 to 219.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
45573	225.3 to 226.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
45591	226.3 to 227.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081140	N E ST	2ND ST	1ST ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45592	231.3 to 234.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
45593	240.2 to 245.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
45594	247.1 to 249.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
45595	254.8 to 256.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45596	261.0 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45597	275.0 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
45598	288.2 to 291.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **2ND ST** **$94,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081109	N E ST	314 N E ST	4TH ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45384	0.1 to 53.7 feet	Key Note Segment		5 ft	268			
45383	53.7 to 59.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,220**
TOTAL COST FOR: SW	*side of* **N E ST**	*Starting at:* **314 N E ST**						**$1,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081133	N E ST	3RD ST	2ND ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45543	4.7 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
45530	12.6 to 13.6 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
45544	14.8 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45531	31.7 to 32.7 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
45532	84.2 to 85.2 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
45545	91.4 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45557	95.9 to 116.7 feet	Key Note Segment		5 ft	104			
45533	97.2 to 98.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
45534	107.3 to 108.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
45546	116.7 to 118.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
45547	123.3 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45535	123.9 to 124.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
45548	126.5 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
45536	160.3 to 161.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
45549	188.9 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
45537	193.2 to 194.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
45550	197.8 to 199.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45551	202.3 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
45538	206.1 to 207.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
45539	210.6 to 211.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
45558	220.7 to 238.6 feet	Key Note Segment		5 ft	90			
45552	243.3 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
45559	251.8 to 266.4 feet	Key Note Segment		5 ft	73			
45553	271.8 to 281.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
45540	282.6 to 283.6 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
45560	282.7 to 291.2 feet	Key Note Segment		5 ft	43			
45541	291.3 to 292.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
45554	292.0 to 293.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081133	N E ST	3RD ST	2ND ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45555	294.2 to 300.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
45542	295.9 to 296.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
45556	300.0 to 301.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **3RD ST** **$46,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081130	N E ST	4TH ST	3RD ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45498	0.0 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
45499	22.8 to 24.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
45500	26.3 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
45501	35.3 to 36.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
45502	36.4 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
45503	47.4 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
45504	57.1 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
45527	71.3 to 78.6 feet	Key Note Segment		5 ft	36			
45505	79.1 to 80.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
45506	95.4 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45507	98.8 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45508	101.9 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
45509	104.3 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45510	108.8 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
45511	134.2 to 135.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
45512	138.0 to 139.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
45528	141.5 to 155.8 feet	Key Note Segment		5 ft	72			
45513	156.2 to 157.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$220**
45514	158.3 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45515	161.9 to 162.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
45516	164.0 to 165.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
45517	166.1 to 167.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	7	SF	$120	**$840**
45518	174.6 to 181.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
45519	181.3 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45520	189.3 to 198.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
45521	199.5 to 203.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
45522	209.7 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
45529	215.8 to 226.7 feet	Key Note Segment		5 ft	55			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081130	N E ST	4TH ST	3RD ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45523	226.9 to 241.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	74	SF	$40	**$2,960**
45496	227.0 to 228.0 feet	Vertical Change	.27"	5 ft	5	REF		
45524	246.7 to 272.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,300**
45497	255.9 to 256.9 feet	Vertical Change	-.27"	5 ft	5	REF		
45525	273.3 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
45526	280.8 to 288.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **4TH ST** **$99,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081111	N E ST	4TH ST	216 N E ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45385	4.2 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
45386	24.7 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
45387	50.2 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
45388	71.2 to 86.9 feet	Key Note Segment		5 ft	79			

TOTAL COST FOR: SW *side of* **N E ST** *Starting at:* **4TH ST** **$28,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081126	N E ST	5TH ST	4TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45491	0.8 to 21.0 feet	Key Note Segment		5 ft	101			
45470	22.5 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
45492	42.4 to 61.5 feet	Key Note Segment		5 ft	96			
45471	62.5 to 66.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$780**
45472	70.0 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
45473	78.7 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
45474	88.1 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45493	94.6 to 115.3 feet	Key Note Segment		5 ft	104			
45468	95.5 to 96.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
45475	121.0 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
45476	126.2 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
45477	130.5 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
45478	137.9 to 148.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
45479	156.9 to 158.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
45480	162.5 to 163.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
45481	164.8 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45482	172.6 to 176.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
45494	176.0 to 196.7 feet	Key Note Segment		5 ft	104			
45483	198.2 to 199.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
45484	203.8 to 205.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
45485	205.9 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
45495	211.7 to 232.2 feet	Key Note Segment		5 ft	103			
45486	232.2 to 233.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
45487	235.8 to 243.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
45488	246.3 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
45469	254.8 to 255.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
45489	259.3 to 263.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
45490	264.1 to 265.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081126	N E ST	5TH ST	4TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total

TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **5TH ST** **$60,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081103	N E ST	CENTRAL AVE	100 N E ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45381	10.4 to 33.0 feet	Key Note Segment		4 ft	90			
45361	32.5 to 33.5 feet	Vertical Change	-.26"	4 ft	4	REF		
45364	39.5 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
45365	49.4 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
45366	53.3 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
45367	79.3 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
45362	97.7 to 98.7 feet	Vertical Change	.27"	4 ft	4	LF	$75	**$300**
45363	106.3 to 107.3 feet	Vertical Change	.31"	4 ft	4	LF	$75	**$300**
45368	177.3 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
45369	188.3 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
45370	278.2 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
45371	288.7 to 292.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
45372	296.5 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,904**
45373	313.8 to 322.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**
45374	326.6 to 329.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
45375	336.8 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
45376	343.1 to 350.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
45382	352.8 to 374.0 feet	Key Note Segment		4 ft	85			
45377	376.2 to 401.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	101	SF	$120	**$12,096**
45378	405.9 to 423.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,448**
45379	427.5 to 430.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
45380	434.3 to 436.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**

TOTAL COST FOR: SW *side of* **N E ST** *Starting at:* **CENTRAL AVE** **$55,608.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081121	N E ST	E YOSEMITE AVE	5TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45438	16.0 to 17.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
45439	39.4 to 43.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
45440	48.8 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
45441	52.6 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
45442	55.6 to 59.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
45443	61.3 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
45444	77.0 to 83.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45445	102.0 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45446	111.2 to 124.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
45447	124.8 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
45448	133.4 to 141.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
45449	147.5 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
45450	152.1 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45451	158.3 to 163.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
45452	163.7 to 165.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
45453	171.3 to 172.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
45454	176.7 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
45455	185.3 to 188.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
45456	191.6 to 200.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
45457	201.9 to 203.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45458	206.7 to 208.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
45459	212.8 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45460	216.3 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
45461	222.3 to 233.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
45462	243.5 to 245.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
45463	250.8 to 254.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
45467	251.7 to 253.4 feet		5.0-6.0%	5 ft	9			
45466	255.3 to 279.5 feet	Key Note Segment		5 ft	121			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081121	N E ST	E YOSEMITE AVE	5TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45464	279.5 to 284.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	**$900**
45465	287.0 to 299.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**

TOTAL COST FOR: NE *side of* **N E ST** *Starting at:* **E YOSEMITE AVE** **$71,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201008	N G ST	4TH ST	3RD ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40272	3.5 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
40290	4.6 to 26.5 feet	Key Note Segment		5 ft	110			
40273	33.3 to 35.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
40274	37.3 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
40275	54.6 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
40276	70.0 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
40277	78.5 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
40278	91.2 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
40266	103.0 to 104.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
40279	104.1 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
40280	125.9 to 129.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
40281	130.2 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
40282	146.8 to 153.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
40283	155.6 to 158.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40284	160.9 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
40267	167.4 to 168.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
40269	204.0 to 205.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
40285	206.9 to 212.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
40286	214.5 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
40287	233.3 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
40270	236.1 to 237.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
40288	242.7 to 243.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40291	246.5 to 272.7 feet	Key Note Segment		5 ft	131			
40271	247.6 to 248.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
40289	272.7 to 283.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	56	SF	$40	**$2,220**

TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **4TH ST** **$85,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181625	N G ST	4TH ST	W YOSEMITE AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38381	4.4 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,700**
38382	36.7 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	337	SF	$120	**$40,440**
38360	49.1 to 50.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
38361	57.7 to 58.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
38363	66.3 to 67.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
38364	70.6 to 71.6 feet	**Vertical Change**	-.48"	5 ft	5	REF		
38365	92.0 to 93.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
38383	111.8 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
38384	134.7 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
38366	135.1 to 136.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
38385	147.2 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
38408	152.0 to 177.0 feet	Key Note Segment		5 ft	125			
38386	177.2 to 184.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,440**
38387	188.8 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
38367	194.5 to 195.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
38409	204.0 to 233.4 feet	Key Note Segment		5 ft	147			
38368	207.5 to 208.5 feet	**Vertical Change**	-.5"	5 ft	5	REF		
38369	238.0 to 239.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
38370	255.2 to 256.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
38388	280.0 to 284.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
38389	286.8 to 288.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
38410	308.5 to 333.4 feet	Key Note Segment		5 ft	125			
38390	333.4 to 338.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$980**
38391	367.3 to 385.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
38371	384.3 to 385.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
38372	392.9 to 393.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
38392	394.4 to 411.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
38393	415.0 to 425.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181625	N G ST	4TH ST	W YOSEMITE AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38394	427.6 to 429.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
38395	431.8 to 438.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
38396	438.8 to 440.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
38373	444.5 to 445.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
38397	456.5 to 471.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
38374	470.4 to 471.4 feet	**Vertical Change**	.63"	5 ft	5	REF		
38398	471.9 to 504.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,380**
38375	479.0 to 480.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
38376	513.3 to 514.3 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
38399	517.3 to 520.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38400	524.0 to 554.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,120**
38377	536.5 to 537.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
38401	554.2 to 561.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
38402	561.2 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
38403	569.8 to 585.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
38404	602.7 to 612.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
38378	612.0 to 613.0 feet	**Vertical Change**	1.21"	5 ft	5	REF		
38379	629.0 to 630.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
38405	631.3 to 634.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
38406	639.8 to 645.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
38407	646.4 to 660.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
38380	647.4 to 648.4 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **4TH ST** **$204,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181619	N G ST	FIFTH ST	4TH ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38340	0.0 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
38341	12.0 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
38332	24.3 to 25.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
38342	46.5 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
38343	72.8 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
38344	83.9 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
38345	92.5 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
38355	100.1 to 122.6 feet	Key Note Segment		5 ft	113			
38333	101.5 to 102.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
38346	123.0 to 128.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
38356	129.3 to 159.2 feet	Key Note Segment		5 ft	149			
38334	138.1 to 139.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
38347	159.8 to 162.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
38348	163.7 to 191.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
38335	164.2 to 165.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
38336	173.0 to 174.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
38337	190.2 to 191.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
38349	191.7 to 205.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
38350	206.1 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	187	SF	$120	**$22,380**
38351	244.5 to 249.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
38352	249.3 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
38358	251.1 to 252.6 feet		5.0-6.0%	5 ft	8			
38359	253.1 to 254.5 feet		6.0-7.0%	5 ft	7			
38357	255.9 to 274.4 feet	Key Note Segment		5 ft	92			
38338	273.7 to 274.7 feet	**Vertical Change**	.47"	5 ft	5	REF		
38353	276.8 to 280.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38354	283.0 to 289.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
38339	287.0 to 288.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181619	N G ST	FIFTH ST	4TH ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **FIFTH ST**								**$91,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201042	N G ST	W 1ST ST	W ROBERTS AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40421	0.0 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
40416	36.9 to 37.9 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
40422	66.4 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
40435	78.2 to 89.4 feet	Key Note Segment		5 ft	56			
40423	89.4 to 99.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$1,980**
40417	89.5 to 90.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
40418	129.3 to 130.3 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
40424	131.8 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
40425	156.0 to 157.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
40426	159.7 to 162.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
40419	164.8 to 165.8 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
40427	168.1 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40428	173.2 to 177.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
40429	188.7 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
40436	199.4 to 213.3 feet	Key Note Segment		5 ft	70			
40430	214.8 to 217.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
40431	219.4 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40437	223.2 to 235.7 feet	Key Note Segment		5 ft	63			
40420	231.2 to 232.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
40432	257.8 to 266.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
40433	281.8 to 285.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
40434	287.7 to 290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **W 1ST ST** **$38,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201113	N G ST	W 1ST ST	W 2ND ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40538	0.0 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
40539	24.5 to 30.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
40540	30.1 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
40530	35.8 to 36.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
40558	38.3 to 47.8 feet	Key Note Segment		5 ft	48			
40541	47.8 to 48.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
40542	48.8 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
40543	58.3 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
40544	64.9 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
40545	67.8 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
40546	76.7 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40531	79.7 to 80.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
40547	97.3 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40548	100.6 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
40549	122.3 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
40550	133.9 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
40551	144.8 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
40559	148.5 to 157.3 feet	Key Note Segment		5 ft	44			
40552	158.1 to 164.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
40553	164.3 to 168.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
40532	170.5 to 171.5 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
40554	172.6 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
40560	196.9 to 205.6 feet	Key Note Segment		5 ft	44			
40533	197.7 to 198.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
40535	206.4 to 207.4 feet	**Vertical Change**	.65"	5 ft	5	REF		
40536	210.6 to 211.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
40555	224.5 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
40561	239.5 to 248.8 feet	Key Note Segment		5 ft	47			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201113	N G ST	W 1ST ST	W 2ND ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40556	248.8 to 251.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
40557	267.3 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
40537	272.9 to 273.9 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **W 1ST ST** **$78,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201029	N G ST	W 2ND ST	W 1ST ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40368	4.6 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
40383	19.4 to 31.3 feet	Key Note Segment		5 ft	60			
40369	32.3 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
40370	67.2 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
40371	72.2 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40384	84.3 to 92.2 feet	Key Note Segment		5 ft	40			
40372	92.2 to 97.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
40373	106.8 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
40385	125.8 to 133.7 feet	Key Note Segment		5 ft	39			
40364	128.7 to 129.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
40374	133.7 to 139.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**
40375	139.8 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
40376	145.4 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
40365	148.7 to 149.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
40386	166.7 to 177.8 feet	Key Note Segment		5 ft	56			
40377	214.2 to 223.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
40366	223.9 to 224.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40378	224.1 to 226.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
40367	225.7 to 226.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
40379	227.7 to 229.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
40380	231.3 to 236.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
40387	238.7 to 248.2 feet	Key Note Segment		5 ft	48			
40381	254.5 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
40382	281.1 to 285.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **W 2ND ST** **$36,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201116	N G ST	W 2ND ST	W 3RD ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40576	1.7 to 3.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
40577	4.4 to 7.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	17	SF	$120	**$2,040**
40578	12.4 to 15.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
40579	16.7 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
40580	25.2 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
40599	41.6 to 52.5 feet	Key Note Segment		5 ft	55			
40581	52.6 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
40562	64.4 to 65.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40582	66.3 to 77.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
40563	74.8 to 75.8 feet	**Vertical Change**	.45"	5 ft	5	REF		
40583	78.0 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40584	83.1 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
40564	90.3 to 91.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
40585	102.1 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
40566	105.7 to 106.7 feet	**Vertical Change**	1.9"	5 ft	5	SF	$75	**$375**
40586	109.2 to 110.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
40567	111.1 to 112.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
40587	111.5 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40600	114.2 to 120.2 feet	Key Note Segment		5 ft	30			
40588	121.4 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
40589	144.3 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
40601	154.2 to 164.7 feet	Key Note Segment		5 ft	53			
40568	165.0 to 166.0 feet	**Vertical Change**	.55"	5 ft	5	REF		
40590	165.5 to 171.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
40591	172.8 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
40569	182.1 to 183.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
40592	187.0 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
40602	196.1 to 207.8 feet	Key Note Segment		5 ft	59			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201116	N G ST	W 2ND ST	W 3RD ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40570	208.8 to 209.8 feet	Vertical Change	.38"	5 ft	5	REF		
40593	208.9 to 210.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
40594	212.8 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
40571	214.1 to 215.1 feet	Vertical Change	-.28"	5 ft	5	REF		
40595	229.0 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
40572	234.2 to 235.2 feet	Vertical Change	-.51"	5 ft	5	SF	$75	$375
40603	234.3 to 250.8 feet	Key Note Segment		5 ft	83			
40596	278.1 to 286.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
40604	286.7 to 294.2 feet	Key Note Segment		5 ft	38			
40574	295.9 to 296.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
40575	299.2 to 300.2 feet	Vertical Change	-.35"	5 ft	5	REF		
40597	299.7 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
40598	301.6 to 305.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **W 2ND ST** **$87,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201121	N G ST	W 3RD ST	W 4TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40613	0.1 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
40634	14.2 to 31.7 feet	Key Note Segment		5 ft	88			
40614	31.7 to 36.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	22	SF	$40	**$880**
40615	39.1 to 40.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
40616	40.8 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
40617	49.1 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
40635	51.2 to 73.8 feet	Key Note Segment		5 ft	113			
40618	74.2 to 79.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	**$1,000**
40619	79.7 to 84.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
40605	80.0 to 81.0 feet	Vertical Change	-.26"	5 ft	5	REF		
40620	84.0 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
40621	97.4 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
40606	100.7 to 101.7 feet	Vertical Change	-.27"	5 ft	5	REF		
40622	134.3 to 136.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
40623	137.7 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
40624	148.0 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
40625	157.7 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
40608	167.1 to 168.1 feet	Vertical Change	.41"	5 ft	5	REF		
40626	167.3 to 172.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
40627	176.4 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
40628	186.7 to 211.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
40610	209.5 to 210.5 feet	Vertical Change	.48"	5 ft	5	REF		
40629	213.6 to 214.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
40630	214.7 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
40631	224.1 to 227.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
40611	231.2 to 232.2 feet	Vertical Change	.31"	5 ft	5	REF		
40632	232.1 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
40612	248.6 to 249.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201121	N G ST	W 3RD ST	W 4TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40636	250.3 to 270.1 feet	Key Note Segment		5 ft	99			
40633	272.3 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **W 3RD ST** **$90,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201059	N G ST	W CENTRAL AVE	200 N G ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40490	0.2 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
40488	2.3 to 3.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
40504	19.1 to 37.9 feet	Key Note Segment		5 ft	94			
40489	19.7 to 20.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
40491	37.9 to 48.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
40492	52.3 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
40493	73.3 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
40494	82.1 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
40495	87.8 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
40496	109.3 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
40505	131.6 to 150.2 feet	Key Note Segment		5 ft	93			
40497	165.7 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
40498	180.6 to 204.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
40499	208.3 to 209.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
40500	210.3 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40501	214.3 to 233.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
40502	235.8 to 237.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40506	255.7 to 270.1 feet	Key Note Segment		5 ft	72			
40503	270.1 to 271.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$340**
40507	276.6 to 289.5 feet	Key Note Segment		5 ft	64			

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **W CENTRAL AVE** **$77,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201052	N G ST	W ROBERTS AVE	707 G ST	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40480	0.6 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
40481	13.7 to 24.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
40482	24.7 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40483	28.3 to 40.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
40484	40.9 to 57.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
40485	62.3 to 69.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
40486	69.9 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
40487	90.2 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**

TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **W ROBERTS AVE** **$55,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201109	N G ST	W ROBERTS AVE	W 1ST ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40518	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
40514	5.3 to 6.3 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
40519	6.7 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
40515	22.4 to 23.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
40520	34.3 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
40521	68.6 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
40522	95.4 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
40523	123.6 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
40516	142.6 to 143.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
40528	154.4 to 174.0 feet	Key Note Segment		5 ft	98			
40517	155.3 to 156.3 feet	**Vertical Change**	-.45"	5 ft	5	REF		
40524	174.0 to 223.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	249	SF	$40	**$9,960**
40525	227.8 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
40529	242.3 to 251.8 feet	Key Note Segment		5 ft	48			
40526	266.8 to 268.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
40527	268.3 to 280.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: SW *side of* **N G ST** *Starting at:* **W ROBERTS AVE** **$88,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181607	N G ST	W YOSEMITE AVE	FIFTH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38256	1.6 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	34	SF	$120	**$4,104**
38257	9.9 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
38258	20.8 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	121	SF	$120	**$14,544**
38248	23.8 to 24.8 feet	**Vertical Change**	.45"	6 ft	6	REF		
38249	37.9 to 38.9 feet	**Vertical Change**	.29"	6 ft	6	REF		
38259	43.7 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
38260	55.0 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	34	SF	$120	**$4,032**
38261	65.8 to 68.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	**$2,016**
38279	68.6 to 85.8 feet	Key Note Segment		6 ft	103			
38262	85.8 to 88.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	17	SF	$40	**$696**
38263	101.3 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,016**
38264	106.3 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	74	SF	$120	**$8,856**
38250	112.5 to 113.5 feet	**Vertical Change**	3.38"	6 ft	6	REF		
38251	119.9 to 120.9 feet	**Vertical Change**	.33"	6 ft	6	LF	$75	**$450**
38265	121.9 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
38266	126.6 to 127.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
38267	128.8 to 145.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	100	SF	$120	**$11,952**
38268	145.7 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	35	SF	$120	**$4,176**
38269	158.4 to 172.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	83	SF	$120	**$9,936**
38252	172.2 to 173.2 feet	**Vertical Change**	.32"	6 ft	6	REF		
38270	174.8 to 176.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$864**
38271	176.0 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
38272	180.4 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	65	SF	$120	**$7,848**
38273	195.8 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,736**
38280	212.0 to 213.8 feet		5.0-6.0%	6 ft	11			
38274	212.8 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	140	SF	$120	**$16,848**
38253	213.1 to 214.1 feet	**Vertical Change**	-.38"	6 ft	6	REF		
38254	233.6 to 234.6 feet	**Vertical Change**	-.33"	6 ft	6	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181607	N G ST	W YOSEMITE AVE	FIFTH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38275	240.6 to 260.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	122	SF	$120	**$14,616**
38255	245.2 to 246.2 feet	**Vertical Change**	.51"	6 ft	6	REF		
38276	263.3 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	67	SF	$120	**$8,064**
38277	275.4 to 276.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
38278	298.7 to 300.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**

TOTAL COST FOR: NE *side of* **N G ST** *Starting at:* **W YOSEMITE AVE** **$127,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041219	N GATEWAY DR	1140 N GATEWAY DR	W CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121255	2.1 to 3.1 feet	Vertical Change	.38"	6 ft	6	REF		
121282	2.6 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	$1,944
121283	13.8 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	$5,184
121284	34.0 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	$1,656
121256	40.2 to 41.2 feet	Vertical Change	.45"	6 ft	6	LF	$75	$450
121285	45.2 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	$1,656
121286	52.0 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	$5,184
121287	62.2 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	71	SF	$120	$8,496
121257	72.4 to 73.4 feet	Vertical Change	-.26"	6 ft	6	REF		
121288	74.0 to 93.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	119	SF	$120	$14,256
121289	95.1 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	88	SF	$120	$10,584
121290	112.3 to 160.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	289	SF	$120	$34,632
121291	160.8 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	$792
121258	160.9 to 164.1 feet	Vertical Change	-.45"	6 ft	19	REF		
121292	164.4 to 166.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	$1,152
121333	168.3 to 193.9 feet	Key Note Segment		6 ft	154			
121259	181.5 to 182.5 feet	Vertical Change	-.33"	6 ft	6	REF		
121293	193.9 to 205.3 feet	Cross Slope (Driveway)	2.0-3.0%	6 ft	68	SF	$40	$2,736
121260	205.6 to 206.6 feet	Vertical Change	.33"	6 ft	6	LF	$75	$450
121294	208.8 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	$1,512
121261	217.0 to 218.0 feet	Vertical Change	.3"	6 ft	6	LF	$75	$450
121295	238.6 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	$2,304
121296	246.1 to 254.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	$5,688
121262	253.5 to 254.5 feet	Vertical Change	-.45"	6 ft	6	REF		
121297	256.4 to 272.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	97	SF	$120	$11,592
121263	261.9 to 262.9 feet	Vertical Change	-.56"	6 ft	6	REF		
121298	277.0 to 279.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	$2,016
121264	280.8 to 281.8 feet	Vertical Change	.29"	6 ft	6	LF	$75	$450

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041219	N GATEWAY DR	1140 N GATEWAY DR	W CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121265	293.9 to 294.9 feet	Vertical Change	.29"	6 ft	6	LF	$75	$450
121299	295.4 to 311.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	97	SF	$120	$11,664
121266	306.1 to 307.1 feet	Vertical Change	.38"	6 ft	6	REF		
121300	311.6 to 312.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	8	SF	$120	$936
121301	315.0 to 318.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	20	SF	$120	$2,376
121302	319.1 to 323.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	$3,024
121267	322.2 to 323.2 feet	Vertical Change	.61"	6 ft	6	REF		
121303	324.1 to 336.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	77	SF	$120	$9,216
121268	335.7 to 336.7 feet	Vertical Change	.52"	6 ft	6	REF		
121304	337.7 to 343.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	36	SF	$120	$4,320
121269	340.6 to 343.9 feet	Vertical Change	-.46"	6 ft	20	REF		
121305	347.5 to 349.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	11	SF	$120	$1,296
121306	351.8 to 361.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	57	SF	$120	$6,840
121307	361.3 to 366.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	$3,600
121308	369.8 to 373.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	$2,520
121270	374.0 to 375.0 feet	Vertical Change	.41"	6 ft	6	LF	$75	$450
121309	380.3 to 389.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	55	SF	$120	$6,552
121271	390.6 to 391.6 feet	Vertical Change	-.6"	6 ft	6	SF	$75	$450
121310	391.7 to 393.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	$1,008
121311	393.9 to 401.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	$5,472
121312	401.8 to 407.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	36	SF	$120	$4,320
121334	408.3 to 435.6 feet	Key Note Segment		6 ft	164			
121313	436.0 to 440.0 feet	Cross Slope (Driveway)	2.0-3.0%	6 ft	24	SF	$40	$960
121272	436.9 to 437.9 feet	Vertical Change	-.36"	6 ft	6	REF		
121314	443.5 to 445.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	9	SF	$120	$1,080
121315	445.6 to 449.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	$2,880
121273	448.5 to 451.7 feet	Vertical Change	.38"	6 ft	19	REF		
121316	458.0 to 461.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	$2,520

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041219	N GATEWAY DR	1140 N GATEWAY DR	W CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121274	460.0 to 461.0 feet	Vertical Change	-.89"	6 ft	6	REF		
121317	464.1 to 474.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	60	SF	$120	$7,200
121318	479.0 to 490.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	71	SF	$120	$8,496
121319	493.4 to 523.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	179	SF	$120	$21,528
121335	525.3 to 554.8 feet	Key Note Segment		6 ft	177			
121320	555.4 to 564.3 feet	Cross Slope (Driveway)	3.0-4.0%	6 ft	53	SF	$40	$2,136
121321	566.1 to 579.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	78	SF	$120	$9,360
121275	570.8 to 571.8 feet	Vertical Change	.48"	6 ft	6	REF		
121322	584.2 to 603.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	113	SF	$120	$13,608
121276	599.7 to 600.7 feet	Vertical Change	.4"	6 ft	6	REF		
121277	607.9 to 608.9 feet	Vertical Change	.32"	6 ft	6	LF	$75	$450
121278	615.7 to 616.7 feet	Vertical Change	-1.26"	6 ft	6	REF		
121323	615.7 to 617.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	$1,584
121324	620.3 to 624.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	$2,880
121325	628.5 to 642.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	83	SF	$120	$9,936
121326	645.6 to 654.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	$6,408
121336	658.2 to 681.8 feet	Key Note Segment		6 ft	142			
121327	684.5 to 692.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	50	SF	$120	$5,976
121328	693.1 to 695.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	$1,368
121279	693.2 to 694.2 feet	Vertical Change	-.46"	6 ft	6	REF		
121337	708.8 to 731.8 feet	Key Note Segment		6 ft	138			
121329	736.0 to 737.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	$720
121280	754.9 to 755.9 feet	Vertical Change	-.31"	6 ft	6	LF	$75	$450
121330	760.7 to 761.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	$792
121331	769.7 to 782.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	74	SF	$120	$8,856
121281	778.6 to 779.6 feet	Vertical Change	.27"	6 ft	6	REF		
121332	787.3 to 805.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	112	SF	$120	$13,392

TOTAL COST FOR: W *side of* **N GATEWAY DR** *Starting at:* **1140 N GATEWAY DR** **$300,258.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181454	N GATEWAY DR	211 N GATEWAY DR	4TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37953	0.6 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
37948	2.6 to 3.6 feet	**Vertical Change**	1.47"	5 ft	5	REF		
37954	13.9 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
37949	17.0 to 18.0 feet	**Vertical Change**	2.22"	5 ft	5	SF	$75	**$375**
37955	19.6 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,860**
37956	44.9 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
37957	67.0 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
37958	88.0 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
37959	105.3 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
37967	108.2 to 139.4 feet	Key Note Segment		5 ft	156			
37950	127.7 to 128.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
37960	139.4 to 153.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	69	SF	$40	**$2,760**
37961	155.9 to 166.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
37962	168.3 to 171.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
37963	172.7 to 177.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
37964	177.5 to 184.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
37965	184.1 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
37966	198.4 to 206.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
37968	207.1 to 236.6 feet	Key Note Segment		5 ft	148			
37951	228.2 to 229.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
37952	232.5 to 233.5 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **211 N GATEWAY DR** **$68,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181512	N GATEWAY DR	3RD ST	605 N GATEWAY DR	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38052	0.6 to 2.2 feet		5.0-6.0%	5 ft	8			
38004	6.8 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
38005	35.6 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
38006	44.6 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
37997	53.8 to 54.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
37998	94.4 to 95.4 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
37999	100.7 to 101.7 feet	**Vertical Change**	-.95"	5 ft	5	SF	$75	**$375**
38007	116.5 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
38008	123.4 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
38009	144.5 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
38010	152.2 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
38047	160.3 to 189.3 feet	Key Note Segment		5 ft	145			
38000	178.3 to 179.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
38011	190.0 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
38012	197.7 to 201.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38013	206.3 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
38001	212.4 to 213.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
38014	218.5 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38015	258.6 to 263.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
38016	267.3 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
38017	280.3 to 283.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38018	285.5 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
38019	294.8 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
38020	324.5 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38002	329.6 to 330.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38021	331.5 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38022	339.7 to 366.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
38048	369.8 to 395.1 feet	Key Note Segment		5 ft	127			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181512	N GATEWAY DR	3RD ST	605 N GATEWAY DR	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38023	396.2 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
38024	420.3 to 424.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
38025	424.6 to 431.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
38003	425.7 to 426.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
38049	431.8 to 479.6 feet	Key Note Segment		5 ft	239			
38026	479.6 to 496.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	85	SF	$40	**$3,400**
38027	496.8 to 506.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
38028	517.9 to 523.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
38029	543.5 to 546.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
38030	548.9 to 550.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
38031	552.3 to 557.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
38032	557.6 to 566.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
38033	566.8 to 569.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
38034	577.8 to 582.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
38035	586.3 to 599.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
38050	601.9 to 631.3 feet	Key Note Segment		5 ft	147			
38036	632.1 to 636.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
38037	638.3 to 651.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
38038	651.6 to 668.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
38039	670.5 to 684.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
38053	684.0 to 685.0 feet	**Continuous Width**	30"	5 ft	5	SF	$120	**$600**
38040	687.4 to 688.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38041	691.8 to 699.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
38042	704.3 to 705.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38043	719.7 to 724.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
38051	724.0 to 751.8 feet	Key Note Segment		5 ft	139			
38044	752.8 to 755.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
38045	755.8 to 762.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181512	N GATEWAY DR	3RD ST	605 N GATEWAY DR	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38046	764.6 to 781.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **3RD ST** **$173,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181548	N GATEWAY DR	3RD ST	4TH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38172	0.0 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
38173	23.3 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
38163	23.9 to 24.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
38164	40.9 to 41.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
38182	50.4 to 83.2 feet	Key Note Segment		5 ft	164			
38165	63.2 to 64.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
38174	83.2 to 88.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
38183	88.8 to 97.9 feet	Key Note Segment		5 ft	46			
38166	100.9 to 101.9 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
38167	120.6 to 121.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38187	123.2 to 124.2 feet		5.0-6.0%	5 ft	5			
38184	126.2 to 147.0 feet	Key Note Segment		5 ft	104			
38175	152.6 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38176	169.9 to 176.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
38177	180.4 to 185.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
38185	187.8 to 211.8 feet	Key Note Segment		5 ft	120			
38178	211.8 to 225.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	71	SF	$40	**$2,820**
38186	225.9 to 250.9 feet	Key Note Segment		5 ft	125			
38168	249.8 to 253.4 feet	**Vertical Change**	.48"	5 ft	18	REF		
38179	250.9 to 256.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	26	SF	$40	**$1,020**
38180	256.8 to 277.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	102	SF	$120	**$12,180**
38169	273.1 to 274.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
38181	279.3 to 286.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
38170	283.5 to 284.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
38171	289.6 to 290.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **3RD ST** **$50,245.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181542	N GATEWAY DR	400 N GATEWAY DR	3RD ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38160	5.7 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	89	SF	$120	**$10,728**
38161	22.8 to 33.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	62	SF	$120	**$7,488**
38159	30.2 to 31.2 feet	**Vertical Change**	-.26"	6 ft	6	REF		
38162	33.6 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,256**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **400 N GATEWAY DR** **$23,472.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181502	N GATEWAY DR	4TH ST	3RD ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37975	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
37976	12.3 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
37994	17.0 to 40.1 feet	Key Note Segment		5 ft	116			
37977	43.0 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
37978	46.5 to 52.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
37979	53.1 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
37980	56.8 to 59.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
37981	69.3 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
37995	72.9 to 95.0 feet	Key Note Segment		5 ft	110			
37969	90.9 to 91.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
37982	102.4 to 104.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
37970	116.7 to 117.7 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
37983	121.0 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
37984	127.2 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
37985	137.2 to 140.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
37986	141.1 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
37987	143.2 to 179.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,660**
37971	150.2 to 151.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
37972	168.0 to 169.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
37988	181.6 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
37996	187.7 to 227.8 feet	Key Note Segment		5 ft	201			
37973	225.2 to 226.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
37989	227.8 to 258.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	154	SF	$40	**$6,140**
37990	258.7 to 263.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
37991	263.2 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
37992	277.7 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
37993	289.3 to 291.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **4TH ST** **$69,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181553	N GATEWAY DR	4TH ST	FIFTH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38190	8.4 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
38191	15.5 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38205	23.7 to 53.3 feet	Key Note Segment		5 ft	148			
38192	53.3 to 61.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,560**
38193	66.0 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
38194	67.8 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
38195	76.8 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
38196	96.1 to 108.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
38188	98.5 to 99.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
38197	108.5 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
38198	124.2 to 125.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
38206	125.8 to 157.2 feet	Key Note Segment		5 ft	157			
38199	158.4 to 162.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
38200	164.2 to 188.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,460**
38201	190.4 to 194.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
38202	194.4 to 216.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
38207	218.6 to 241.9 feet	Key Note Segment		5 ft	117			
38203	241.9 to 249.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,560**
38204	270.5 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38189	287.4 to 288.4 feet	**Vertical Change**	1.34"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **4TH ST** **$72,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181519	N GATEWAY DR	709 N GATEWAY DR	625 N GATEWAY DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38069	0.3 to 50.8 feet	Key Note Segment		5 ft	253			
38054	19.0 to 20.0 feet	Vertical Change	3.2"	5 ft	5	REF		
38059	60.2 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
38060	73.0 to 78.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
38055	79.0 to 80.0 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
38070	79.8 to 126.8 feet	Key Note Segment		5 ft	235			
38061	126.8 to 132.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	26	SF	$40	**$1,040**
38062	132.5 to 136.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
38056	133.0 to 134.0 feet	Vertical Change	.31"	5 ft	5	REF		
38057	136.5 to 137.5 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
38063	138.3 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
38064	175.3 to 179.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
38071	179.8 to 201.8 feet	Key Note Segment		5 ft	110			
38065	211.1 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
38066	220.3 to 240.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
38058	255.6 to 256.6 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
38067	257.3 to 259.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
38068	273.9 to 275.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **709 N GATEWAY DR** **$48,185.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105181448	N GATEWAY DR	E YOSEMITE AVE	101 N GATEWAY DR	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37935	2.6 to 5.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	16	SF	$120	**$1,944**
37936	9.5 to 13.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	25	SF	$120	**$3,024**
37937	16.0 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
37938	28.4 to 29.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
37939	34.3 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
37940	40.9 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
37941	45.1 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	50	SF	$120	**$5,976**
37942	60.4 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	74	SF	$120	**$8,856**
37943	75.1 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	13	SF	$120	**$1,584**
37944	79.7 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	34	SF	$120	**$4,104**
37945	85.6 to 91.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	35	SF	$120	**$4,176**
37947	94.1 to 127.5 feet	Key Note Segment		6 ft	200			
37934	95.1 to 96.1 feet	**Vertical Change**	.33"	6 ft	6	REF		
37946	128.3 to 135.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	41	SF	$40	**$1,656**

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **E YOSEMITE AVE** **$40,608.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181557	N GATEWAY DR	FIFTH ST	W YOSEMITE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38213	1.6 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	266	SF	$120	**$31,920**
38214	23.1 to 27.9 feet	Cross Slope (PAR)	3.0-4.0%	14 ft	67	SF	$120	**$8,064**
38215	30.9 to 33.3 feet	Cross Slope (PAR)	3.0-4.0%	14 ft	34	SF	$120	**$4,032**
38216	35.0 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	249	SF	$120	**$29,904**
38208	50.9 to 51.9 feet	**Vertical Change**	.34"	14 ft	14	REF		
38217	56.9 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	88	SF	$120	**$10,584**
38218	67.5 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	305	SF	$120	**$36,624**
38219	90.1 to 118.1 feet	Cross Slope (PAR)	4.0-5.0%	14 ft	392	SF	$120	**$47,040**
38220	118.7 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	255	SF	$120	**$30,576**
38209	147.3 to 148.3 feet	**Vertical Change**	.52"	14 ft	14	SF	$75	**$1,050**
38210	152.2 to 153.2 feet	**Vertical Change**	.31"	14 ft	14	REF		
38221	152.3 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	18	SF	$120	**$2,184**
38211	153.9 to 154.9 feet	**Vertical Change**	1.83"	14 ft	14	REF		
38222	154.6 to 161.3 feet	Cross Slope (PAR)	4.0-5.0%	14 ft	94	SF	$120	**$11,256**
38223	161.3 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	546	SF	$120	**$65,520**
38224	200.9 to 213.4 feet	Cross Slope (PAR)	4.0-5.0%	14 ft	175	SF	$120	**$21,000**
38225	213.4 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	171	SF	$120	**$20,496**
38212	227.9 to 228.9 feet	**Vertical Change**	1.56"	14 ft	14	REF		
38226	228.3 to 252.6 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	340	SF	$120	**$40,824**
38230	256.3 to 269.8 feet	Key Note Segment		14 ft	189			
38227	269.8 to 271.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	14 ft	21	SF	$40	**$840**
38228	272.0 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	14 ft	174	SF	$120	**$20,832**
38229	291.3 to 293.1 feet	Cross Slope (PAR)	4.0-5.0%	14 ft	25	SF	$120	**$3,024**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **FIFTH ST** **$385,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181536	N GATEWAY DR	W 1ST ST	W 2ND ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38129	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	23	SF	$120	**$2,808**
38130	6.6 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	98	SF	$120	**$11,700**
38131	25.3 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	118	SF	$120	**$14,118**
38144	43.4 to 102.4 feet	Key Note Segment		7 ft	384			
38132	102.4 to 104.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	7 ft	15	SF	$40	**$598**
38133	106.9 to 131.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	160	SF	$120	**$19,188**
38134	143.8 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,432**
38135	150.2 to 155.3 feet	Cross Slope (PAR)	7.0-8.0%	7 ft	33	SF	$120	**$3,978**
38136	155.3 to 158.1 feet	Cross Slope (PAR)	5.0-6.0%	7 ft	18	SF	$120	**$2,184**
38137	158.1 to 161.6 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	23	SF	$120	**$2,730**
38138	162.1 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	85	SF	$120	**$10,218**
38145	175.5 to 194.3 feet	Key Note Segment		7 ft	122			
38126	192.8 to 193.8 feet	**Vertical Change**	2.47"	7 ft	7	REF		
38139	194.3 to 212.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	7 ft	119	SF	$40	**$4,758**
38140	212.6 to 213.8 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	8	SF	$120	**$936**
38146	214.2 to 243.6 feet	Key Note Segment		7 ft	191			
38141	244.0 to 245.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	7 ft	8	SF	$40	**$338**
38142	248.3 to 255.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	46	SF	$120	**$5,460**
38143	256.5 to 263.2 feet	Cross Slope (PAR)	6.0-7.0%	7 ft	44	SF	$120	**$5,226**
38147	264.2 to 300.4 feet	Key Note Segment		7 ft	235			
38128	300.9 to 301.9 feet	**Vertical Change**	2.67"	7 ft	7	SF	$75	**$488**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **W 1ST ST** **$88,159.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181540	N GATEWAY DR	W 2ND ST	424 N GATEWAY DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38151	6.3 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
38148	14.7 to 15.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
38152	15.0 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38149	28.9 to 29.9 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
38158	30.1 to 59.1 feet	Key Note Segment		5 ft	145			
38150	57.3 to 58.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
38153	76.1 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38154	85.2 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
38155	102.3 to 106.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38156	110.1 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
38157	122.3 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **W 2ND ST** **$23,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201020	N GATEWAY DR	W 3RD ST	W 2ND ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40332	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
40319	4.7 to 5.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
40333	8.0 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
40320	14.6 to 15.6 feet	**Vertical Change**	.99"	5 ft	5	REF		
40334	25.8 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
40335	37.6 to 38.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
40354	38.7 to 46.3 feet	Key Note Segment		5 ft	38			
40336	46.3 to 66.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	100	SF	$40	**$4,000**
40337	67.7 to 73.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
40338	76.4 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
40355	80.8 to 91.0 feet	Key Note Segment		5 ft	51			
40339	91.3 to 98.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	38	SF	$40	**$1,520**
40340	98.9 to 102.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
40341	102.8 to 111.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
40321	108.2 to 109.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40342	112.2 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
40322	120.0 to 121.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
40343	124.3 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
40323	128.9 to 129.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
40344	132.6 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
40324	139.2 to 140.2 feet	**Vertical Change**	-.38"	5 ft	5	REF		
40325	145.0 to 146.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
40345	147.3 to 162.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
40346	162.6 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40326	164.9 to 165.9 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
40327	166.6 to 167.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
40356	168.8 to 177.0 feet	Key Note Segment		5 ft	41			
40347	178.1 to 182.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201020	N GATEWAY DR	W 3RD ST	W 2ND ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40348	215.5 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
40328	225.4 to 226.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
40349	229.3 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
40329	237.4 to 238.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
40350	237.5 to 239.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
40351	240.8 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
40330	257.1 to 258.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40352	258.0 to 269.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
40353	272.8 to 293.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
40331	275.1 to 276.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N GATEWAY DR** *Starting at:* **W 3RD ST** **$97,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041139	N GATEWAY DR	W CENTRAL AVE	805 W CENTRAL AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121244	0.5 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
121240	0.7 to 1.7 feet	**Vertical Change**	.47"	5 ft	5	REF		
121245	5.3 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
121246	14.7 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
121253	18.7 to 50.0 feet	Key Note Segment		5 ft	157			
121247	50.3 to 52.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$340**
121248	60.7 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
121249	75.3 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
121250	79.5 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
121251	85.1 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	323	SF	$120	**$38,700**
121241	87.7 to 88.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
121252	149.6 to 173.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
121242	150.6 to 151.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
121254	174.1 to 213.7 feet	Key Note Segment		5 ft	198			
121243	201.0 to 202.0 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N GATEWAY DR** *Starting at:* **W CENTRAL AVE** **$67,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181527	N GATEWAY DR	W CENTRAL AVE	W ROBERTS AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38076	0.0 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
38077	6.8 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38097	10.3 to 11.3 feet	**Continuous Width**	20"	5 ft	5	SF	$120	**$600**
38078	11.2 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
38079	18.3 to 22.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
38080	27.2 to 32.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
38081	33.5 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
38082	37.4 to 41.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
38083	41.4 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
38084	48.5 to 67.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
38085	67.7 to 77.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
38086	80.1 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
38087	87.8 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38096	90.8 to 171.3 feet	Key Note Segment		5 ft	403			
38072	129.7 to 130.7 feet	**Vertical Change**	3.56"	5 ft	5	REF		
38088	172.1 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
38073	178.3 to 179.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
38089	189.2 to 197.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
38090	199.3 to 201.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
38091	201.4 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38074	203.3 to 204.3 feet	**Vertical Change**	1.48"	5 ft	5	SF	$75	**$375**
38092	206.2 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38093	208.0 to 211.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
38075	212.7 to 213.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
38094	221.5 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
38095	234.8 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: SW *side of* **N GATEWAY DR** *Starting at:* **W CENTRAL AVE** **$74,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181532	N GATEWAY DR	W ROBERTS AVE	W 1ST ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38105	0.0 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
38123	4.4 to 27.8 feet	Key Note Segment		5 ft	117			
38106	28.8 to 39.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
38107	39.0 to 42.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
38108	43.9 to 45.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
38109	45.7 to 53.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
38110	53.4 to 74.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
38098	71.8 to 72.8 feet	**Vertical Change**	-.6"	5 ft	5	REF		
38111	75.5 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
38112	84.3 to 87.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
38124	88.8 to 114.2 feet	Key Note Segment		5 ft	127			
38113	114.6 to 129.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
38099	126.8 to 127.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
38114	131.8 to 143.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
38115	143.8 to 147.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
38116	148.1 to 168.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	102	SF	$120	**$12,240**
38100	149.9 to 150.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
38101	167.0 to 168.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
38117	171.0 to 178.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
38118	178.3 to 181.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
38125	181.5 to 213.2 feet	Key Note Segment		5 ft	159			
38102	182.3 to 183.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
38103	198.3 to 199.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
38119	213.3 to 225.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	63	SF	$40	**$2,500**
38120	227.1 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
38121	239.8 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
38122	294.4 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
38104	295.1 to 296.1 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181532	N GATEWAY DR	W ROBERTS AVE	W 1ST ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW	*side of* **N GATEWAY DR**	*Starting at:* **W ROBERTS AVE**						**$96,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140751	N GRANADA DR	128 EAST LOOP	STEEPLE GATE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63407	0.7 to 1.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
63408	4.2 to 5.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$900**
63409	8.5 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
63410	13.1 to 16.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
63411	17.8 to 19.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63412	19.2 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63413	23.4 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
63414	27.3 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
63415	40.5 to 62.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**
63394	56.7 to 57.7 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
63395	63.2 to 64.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
63416	65.8 to 77.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
63417	79.7 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
63418	95.1 to 113.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
63419	116.6 to 125.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
63420	132.7 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
63421	149.8 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
63422	153.4 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
63472	154.5 to 169.1 feet	Key Note Segment		5 ft	73			
63396	171.7 to 172.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
63423	176.4 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
63424	184.7 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
63425	189.8 to 199.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
63426	202.6 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
63427	204.9 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
63428	283.8 to 288.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
63429	293.6 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
63430	314.2 to 315.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140751	N GRANADA DR	128 EAST LOOP	STEEPLE GATE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63431	316.7 to 323.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
63432	323.4 to 335.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
63433	335.4 to 338.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
63434	349.8 to 351.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
63435	353.3 to 360.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
63436	361.0 to 375.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
63437	376.9 to 380.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
63438	380.7 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
63398	381.3 to 382.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
63439	407.3 to 408.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63440	411.2 to 417.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
63441	420.2 to 434.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
63442	435.1 to 437.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
63443	439.5 to 447.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
63444	452.2 to 455.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
63445	460.3 to 466.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
63446	475.6 to 482.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
63447	486.6 to 490.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
63448	494.0 to 498.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
63449	501.3 to 505.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
63450	515.8 to 517.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
63451	520.8 to 522.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63400	525.3 to 526.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
63452	525.3 to 526.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
63453	528.7 to 530.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63454	530.1 to 538.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
63455	541.3 to 546.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
63456	547.3 to 553.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140751	N GRANADA DR	128 EAST LOOP	STEEPLE GATE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63457	553.6 to 562.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
63458	565.3 to 582.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
63401	567.7 to 568.7 feet	**Vertical Change**	2.63"	5 ft	5	REF		
63402	572.2 to 573.2 feet	**Vertical Change**	3.41"	5 ft	5	REF		
63459	585.2 to 604.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
63403	596.0 to 597.0 feet	**Vertical Change**	.52"	5 ft	5	REF		
63460	607.4 to 627.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
63461	627.4 to 648.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,540**
63462	649.5 to 662.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
63463	662.3 to 669.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
63464	670.2 to 679.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
63465	688.5 to 696.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
63404	695.8 to 696.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
63466	697.1 to 706.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
63467	707.6 to 724.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
63405	717.0 to 718.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
63468	727.0 to 749.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
63469	749.4 to 751.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
63470	753.4 to 758.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
63471	758.8 to 760.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
63406	758.9 to 759.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N GRANADA DR** *Starting at:* **128 EAST LOOP** **$308,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150816	N GRANADA DR	2026 N GRANADA DR	2026 N GRANADA DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66447	4.3 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	41	SF	$120	**$4,920**
66448	9.6 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	167	SF	$120	**$20,040**
66449	30.9 to 37.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	62	SF	$120	**$7,440**
66450	39.3 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	79	SF	$120	**$9,480**
66451	47.2 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	503	SF	$120	**$60,360**
66446	51.6 to 52.6 feet	**Vertical Change**	.29"	10 ft	10	REF		

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **2026 N GRANADA DR** **$102,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150813	N GRANADA DR	2130 N GRANADA DR	2130 N GRANADA DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66413	2.6 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
66409	3.8 to 4.8 feet	**Vertical Change**	2.28"	5 ft	5	REF		
66414	13.0 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
66410	21.9 to 22.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
66415	24.4 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66416	28.7 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
66417	41.9 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
66411	57.0 to 58.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
66412	63.4 to 64.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66418	67.6 to 68.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
66419	69.7 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
66420	75.4 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
66421	82.6 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **2130 N GRANADA DR** **$44,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150815	N GRANADA DR	2130 N GRANADA DR	2026 N GRANADA DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66426	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	17	SF	$120	**$2,040**
66427	1.7 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	122	SF	$120	**$14,640**
66422	11.6 to 12.6 feet	**Vertical Change**	-.27"	10 ft	10	REF		
66428	13.9 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	69	SF	$120	**$8,280**
66429	23.2 to 25.8 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	26	SF	$120	**$3,120**
66423	26.0 to 27.0 feet	**Vertical Change**	.34"	10 ft	10	REF		
66430	26.8 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	68	SF	$120	**$8,160**
66431	36.4 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	81	SF	$120	**$9,720**
66432	65.3 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	13	SF	$120	**$1,560**
66433	71.3 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	31	SF	$120	**$3,720**
66434	74.8 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	48	SF	$120	**$5,760**
66435	80.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	40	SF	$120	**$4,800**
66436	86.4 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	44	SF	$120	**$5,280**
66437	95.3 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	38	SF	$120	**$4,560**
66438	103.6 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	395	SF	$120	**$47,400**
66424	118.1 to 119.1 feet	**Vertical Change**	-.59"	10 ft	10	REF		
66425	134.0 to 135.0 feet	**Vertical Change**	.35"	10 ft	10	REF		
66439	148.3 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	211	SF	$120	**$25,320**
66440	172.7 to 205.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	328	SF	$120	**$39,360**
66441	205.7 to 209.7 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	40	SF	$120	**$4,800**
66442	213.3 to 217.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	42	SF	$120	**$5,040**
66443	219.5 to 224.7 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	52	SF	$120	**$6,240**
66444	225.0 to 234.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	96	SF	$120	**$11,520**
66445	234.6 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	237	SF	$120	**$28,440**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **2130 N GRANADA DR** **$239,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160903	N GRANADA DR	BALSAM CT	GREENWOOD DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69284	1.4 to 7.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
69285	7.6 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
69277	34.7 to 35.7 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
69286	42.7 to 75.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,380**
69287	78.8 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
69288	86.5 to 89.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
69289	89.5 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69290	100.8 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69278	104.6 to 105.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
69291	107.7 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69292	128.1 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
69310	138.8 to 153.3 feet	Key Note Segment		5 ft	73			
69293	155.3 to 168.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,860**
69294	171.1 to 172.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
69311	175.6 to 189.8 feet	Key Note Segment		5 ft	71			
69295	190.9 to 194.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
69279	191.5 to 192.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
69296	194.4 to 201.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
69297	202.5 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69298	207.8 to 229.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
69280	230.7 to 231.7 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
69312	230.7 to 247.9 feet	Key Note Segment		5 ft	86			
69299	248.8 to 253.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
69300	256.2 to 268.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,620**
69281	259.4 to 260.4 feet	**Vertical Change**	-.49"	5 ft	5	REF		
69301	268.9 to 284.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
69302	287.3 to 289.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
69313	290.1 to 305.8 feet	Key Note Segment		5 ft	78			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160903	N GRANADA DR	BALSAM CT	GREENWOOD DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69303	308.3 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
69282	323.7 to 324.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
69283	325.7 to 326.7 feet	**Vertical Change**	1.39"	5 ft	5	REF		
69304	326.7 to 333.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	36	SF	$120	**$4,260**
69305	342.9 to 352.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
69306	359.7 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
69307	370.4 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
69308	377.2 to 382.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
69314	382.7 to 396.9 feet	Key Note Segment		5 ft	71			
69309	399.2 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **BALSAM CT** **$115,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140745	N GRANADA DR	DEBORAH LN	PAMELA DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63308	0.4 to 2.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
63309	4.4 to 10.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
63310	11.1 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	222	SF	$120	**$26,640**
63276	30.4 to 31.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
63277	56.2 to 57.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
63311	59.6 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
63312	83.4 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
63313	104.9 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63314	112.3 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
63278	114.2 to 115.2 feet	**Vertical Change**	.57"	5 ft	5	REF		
63279	120.5 to 121.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
63315	136.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
63316	146.7 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
63317	159.0 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
63318	165.4 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63319	175.4 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63320	184.1 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
63321	202.9 to 208.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
63322	209.7 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
63323	218.3 to 220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
63324	241.9 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
63281	245.8 to 249.7 feet	**Vertical Change**	.5"	5 ft	20	SF	$75	**$1,463**
63282	250.5 to 251.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
63325	253.5 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
63283	255.8 to 256.8 feet	**Vertical Change**	-.81"	5 ft	5	REF		
63284	258.1 to 259.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
63285	259.8 to 263.2 feet	**Vertical Change**	.29"	5 ft	17	REF		
63286	266.6 to 267.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140745	N GRANADA DR	DEBORAH LN	PAMELA DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63326	272.9 to 285.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
63327	291.2 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
63328	295.2 to 300.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
63329	305.2 to 311.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
63287	314.1 to 315.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
63330	314.4 to 324.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
63331	330.5 to 342.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
63332	345.2 to 364.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
63333	375.4 to 379.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
63334	384.0 to 388.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
63335	391.4 to 393.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
63336	396.7 to 405.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
63337	406.0 to 414.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
63288	414.9 to 415.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
63338	416.4 to 417.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63339	418.6 to 422.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
63340	427.8 to 429.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63341	431.5 to 433.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
63342	434.3 to 467.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,740**
63289	468.7 to 469.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
63343	469.6 to 473.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
63344	478.8 to 492.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
63290	479.1 to 480.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
63345	493.2 to 495.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
63346	497.7 to 505.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
63347	505.8 to 516.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
63291	522.3 to 523.3 feet	**Vertical Change**	.98"	5 ft	5	SF	$75	**$375**
63348	524.9 to 532.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140745	N GRANADA DR	DEBORAH LN	PAMELA DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63349	534.9 to 536.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
63350	543.7 to 546.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
63351	550.8 to 561.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
63292	554.4 to 555.4 feet	**Vertical Change**	2.74"	5 ft	5	REF		
63352	561.3 to 562.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
63353	565.6 to 566.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
63354	569.1 to 580.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
63293	580.5 to 581.5 feet	**Vertical Change**	2.16"	5 ft	5	SF	$75	**$375**
63355	588.4 to 594.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
63356	599.2 to 600.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
63357	600.9 to 612.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
63294	612.2 to 613.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
63295	619.4 to 620.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
63358	625.0 to 635.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
63359	642.7 to 644.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
63296	648.6 to 649.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
63360	653.8 to 656.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
63297	660.2 to 661.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
63361	685.8 to 694.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
63362	718.0 to 719.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
63363	736.7 to 752.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
63364	752.5 to 757.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
63298	753.3 to 754.3 feet	**Vertical Change**	1.29"	5 ft	5	REF		
63299	765.7 to 766.7 feet	**Vertical Change**	1.82"	5 ft	5	SF	$75	**$375**
63365	807.8 to 823.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
63300	808.0 to 809.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
63366	825.8 to 826.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63367	826.8 to 841.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140745	N GRANADA DR	DEBORAH LN	PAMELA DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63368	845.3 to 849.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
63369	854.3 to 863.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
63370	866.4 to 867.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63371	870.9 to 879.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
63372	883.8 to 890.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
63373	893.0 to 903.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
63374	906.8 to 914.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
63375	933.8 to 942.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
63376	944.3 to 945.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
63301	956.6 to 957.6 feet	**Vertical Change**	.96"	5 ft	5	SF	$75	**$375**
63377	960.1 to 961.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
63378	1001.4 to 1006.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
63379	1023.7 to 1031.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
63302	1028.1 to 1031.4 feet	**Vertical Change**	3.52"	5 ft	17	REF		
63303	1034.9 to 1054.0 feet	**Vertical Change**	3.42"	5 ft	95	REF		
63380	1035.5 to 1055.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
63381	1058.3 to 1061.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
63382	1066.9 to 1068.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
63383	1084.5 to 1085.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63384	1088.3 to 1089.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
63385	1100.9 to 1104.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
63386	1110.8 to 1114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
63387	1120.1 to 1121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
63304	1124.9 to 1125.9 feet	**Vertical Change**	3.52"	5 ft	5	SF	$75	**$375**
63388	1132.3 to 1134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
63305	1133.9 to 1134.9 feet	**Vertical Change**	2.58"	5 ft	5	REF		
63389	1137.8 to 1144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
63390	1154.7 to 1161.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	32	SF	$120	**$3,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
w	2109140745	N GRANADA DR	DEBORAH LN	PAMELA DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63391	1161.7 to 1164.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
63307	1164.3 to 1165.3 feet	**Vertical Change**	.52"	5 ft	5	REF		
63392	1166.4 to 1176.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
63393	1180.3 to 1182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: w *side of* **N GRANADA DR** *Starting at:* **DEBORAH LN** **$367,462.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160856	N GRANADA DR	DRIFTWOOD DR	BALSAM CT	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69201	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
69202	6.3 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
69203	22.1 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
69204	28.8 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
69205	63.7 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
69194	77.1 to 78.1 feet	**Vertical Change**	-.56"	5 ft	5	REF		
69195	82.2 to 83.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
69206	86.2 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
69196	120.0 to 121.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
69207	120.8 to 124.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
69208	126.1 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
69197	132.9 to 133.9 feet	**Vertical Change**	-1.09"	5 ft	5	SF	$75	**$375**
69209	135.9 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69215	150.2 to 151.2 feet		5.0-6.0%	5 ft	5			
69210	153.1 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
69198	153.3 to 154.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
69211	156.7 to 180.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,280**
69199	167.6 to 168.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
69212	180.5 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
69200	185.1 to 186.1 feet	**Vertical Change**	1.84"	5 ft	5	SF	$75	**$375**
69213	187.2 to 201.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
69214	205.3 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
69216	209.8 to 211.7 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **DRIFTWOOD DR** **$89,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160930	N GRANADA DR	GREENWOOD DR	SANDALWOOD DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69644	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
69645	6.2 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
69646	29.5 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
69647	40.1 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
69658	46.3 to 65.1 feet	Key Note Segment		5 ft	94			
69648	65.1 to 66.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
69649	68.5 to 78.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
69659	78.8 to 92.8 feet	Key Note Segment		5 ft	70			
69650	93.9 to 95.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
69651	96.5 to 106.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	52	SF	$120	**$6,180**
69652	108.1 to 113.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
69653	116.2 to 119.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
69654	122.3 to 125.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
69655	127.5 to 134.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
69643	132.7 to 133.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
69656	135.7 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
69657	138.2 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69660	142.3 to 143.8 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **GREENWOOD DR** **$46,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160800	N GRANADA DR	MONOCOTT DR	SUNSET AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68503	0.0 to 4.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
68504	5.7 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
68505	18.6 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
68519	25.6 to 39.8 feet	Key Note Segment		5 ft	71			
68506	40.3 to 43.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$680**
68507	53.6 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68520	55.1 to 69.4 feet	Key Note Segment		5 ft	72			
68521	102.4 to 114.9 feet	Key Note Segment		5 ft	63			
68508	119.6 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
68509	124.3 to 134.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
68510	134.8 to 139.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
68511	146.6 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
68512	151.2 to 157.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
68513	159.4 to 161.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68522	161.7 to 170.9 feet	Key Note Segment		5 ft	46			
68501	171.8 to 172.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
68514	190.3 to 193.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
68515	216.3 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
68523	225.6 to 239.3 feet	Key Note Segment		5 ft	69			
68516	239.3 to 247.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,540**
68502	247.4 to 248.4 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
68517	250.9 to 252.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
68518	254.5 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **MONOCOTT DR** **$46,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160956	N GRANADA DR	N GRANADA DR	RIVERVIEW DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69956	0.8 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
69961	12.3 to 29.3 feet	Key Note Segment		5 ft	85			
69957	29.3 to 37.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,580**
69958	37.5 to 52.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
69959	55.1 to 61.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
69962	63.1 to 78.7 feet	Key Note Segment		5 ft	78			
69960	78.7 to 82.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **N GRANADA DR** **$21,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160817	N GRANADA DR	PINEWOOD DR	RIVERVIEW DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68680	0.0 to 6.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
68697	0.0 to 1.3 feet		6.0-7.0%	5 ft	7			
68698	1.3 to 2.7 feet		5.0-6.0%	5 ft	7			
68681	9.6 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
68671	12.9 to 13.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
68682	18.5 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
68683	23.2 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68684	31.3 to 41.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
68672	39.3 to 40.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
68685	47.3 to 73.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
68673	55.6 to 56.6 feet	**Vertical Change**	-.38"	5 ft	5	REF		
68674	71.6 to 72.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
68686	74.0 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68675	81.0 to 84.5 feet	**Vertical Change**	.42"	5 ft	18	LF	$75	**$1,313**
68687	83.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
68676	93.3 to 94.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
68677	95.8 to 96.8 feet	**Vertical Change**	.67"	5 ft	5	REF		
68678	98.9 to 99.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
68688	102.9 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
68689	104.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68690	108.7 to 116.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
68691	119.0 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
68692	124.7 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68693	144.1 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
68694	165.3 to 171.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
68695	171.3 to 177.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
68696	202.7 to 216.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
68679	208.5 to 209.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160817	N GRANADA DR	PINEWOOD DR	RIVERVIEW DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**E**	*side of* **N GRANADA DR**	*Starting at:* **PINEWOOD DR**					**$81,487.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160838	N GRANADA DR	PINEWOOD DR	DRIFTWOOD DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68955	0.8 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
68953	7.8 to 8.8 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
68956	9.6 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68957	13.8 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
68954	34.9 to 35.9 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
68958	51.6 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
68959	65.2 to 70.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
68960	71.5 to 83.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
68961	86.4 to 89.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
68962	89.4 to 106.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
68963	109.8 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
68964	120.0 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
68965	132.7 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
68966	154.1 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68967	160.0 to 166.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
68968	173.2 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
68969	181.0 to 185.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
68970	193.5 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
68971	205.5 to 212.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **PINEWOOD DR** **$81,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160821	N GRANADA DR	RIVERVIEW DR	PINEWOOD DR	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68703	0.0 to 5.4 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	27	SF	$120	**$3,240**
68719	0.0 to 1.6 feet		6.0-7.0%	5 ft	8			
68699	5.9 to 6.9 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
68704	22.3 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68705	29.5 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
68706	35.4 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
68707	68.1 to 72.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
68700	68.5 to 69.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
68708	77.8 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
68701	79.9 to 80.9 feet	**Vertical Change**	.65"	5 ft	5	REF		
68709	84.6 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,620**
68710	117.3 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68711	126.8 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68702	129.0 to 130.0 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
68712	131.8 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
68713	148.3 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
68714	160.6 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
68715	166.4 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
68716	173.1 to 183.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
68717	184.8 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
68718	197.5 to 203.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **RIVERVIEW DR** **$80,910.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109160933	N GRANADA DR	SANDALWOOD DR	MONOCOTT DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69666	0.0 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
69681	10.2 to 24.3 feet	Key Note Segment		5 ft	71			
69667	28.8 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
69668	47.3 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
69669	66.8 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,720**
69661	69.7 to 70.7 feet	**Vertical Change**	.96"	5 ft	5	REF		
69662	95.4 to 96.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
69663	99.9 to 100.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
69670	105.4 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
69671	119.0 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69672	124.3 to 127.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
69673	127.8 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
69682	139.6 to 153.4 feet	Key Note Segment		5 ft	69			
69674	162.9 to 164.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
69664	163.3 to 164.3 feet	**Vertical Change**	-.38"	5 ft	5	REF		
69675	187.3 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
69683	193.8 to 207.7 feet	Key Note Segment		5 ft	70			
69665	195.3 to 196.3 feet	**Vertical Change**	-.42"	5 ft	5	REF		
69676	209.9 to 211.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
69677	215.0 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
69678	222.3 to 225.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
69679	226.7 to 227.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
69680	254.3 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **SANDALWOOD DR** **$60,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140800	N GRANADA DR	STEEPLE GATE	W CLEVELAND AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63516	0.8 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	151	SF	$120	**$18,120**
63517	34.2 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
63518	40.7 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
63519	45.4 to 51.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
63520	53.3 to 59.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
63521	63.5 to 73.9 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	52	SF	$120	**$6,240**
63522	76.2 to 79.4 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	16	SF	$120	**$1,920**
63523	82.0 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
63524	90.6 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
63525	94.6 to 108.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
63526	108.8 to 116.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
63527	120.7 to 141.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,360**
63499	120.9 to 121.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
63500	137.2 to 138.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63528	141.6 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
63529	148.7 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
63530	154.9 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
63531	159.8 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
63532	170.1 to 174.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
63533	176.5 to 179.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
63534	179.7 to 186.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	**$3,780**
63535	186.0 to 191.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
63501	191.5 to 192.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
63536	193.6 to 208.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	74	SF	$120	**$8,820**
63502	205.4 to 206.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
63537	211.1 to 225.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
63538	227.3 to 229.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
63539	230.6 to 238.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140800	N GRANADA DR	STEEPLE GATE	W CLEVELAND AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63503	231.2 to 232.2 feet	Vertical Change	.26"	5 ft	5	REF		
63540	241.1 to 245.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	$2,880
63541	246.7 to 248.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780
63542	248.9 to 252.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$2,040
63543	253.3 to 269.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	$9,420
63544	271.8 to 275.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,400
63545	275.8 to 282.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	$3,840
63504	284.0 to 285.0 feet	Vertical Change	-.38"	5 ft	5	REF		
63546	284.6 to 285.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$720
63547	285.8 to 290.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	$2,640
63548	291.8 to 300.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,160
63549	300.4 to 301.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	$780
63550	301.7 to 310.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	46	SF	$120	$5,460
63505	310.3 to 311.3 feet	Vertical Change	-.33"	5 ft	5	REF		
63551	310.9 to 317.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	$3,960
63552	317.5 to 333.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	$9,660
63553	336.0 to 355.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	$11,520
63554	359.5 to 361.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
63555	363.9 to 388.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	$14,700
63506	380.5 to 381.5 feet	Vertical Change	-.3"	5 ft	5	REF		
63556	391.0 to 393.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
63557	398.2 to 403.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,880
63558	404.6 to 405.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
63559	407.8 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
63560	413.6 to 417.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
63561	422.7 to 425.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
63562	429.3 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
63563	434.6 to 441.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140800	N GRANADA DR	STEEPLE GATE	W CLEVELAND AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63507	440.0 to 441.0 feet	Vertical Change	2.07"	5 ft	5	REF		
63564	447.0 to 452.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
63565	455.1 to 456.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
63566	459.8 to 478.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	$11,400
63567	482.7 to 499.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	$10,080
63568	502.9 to 505.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
63569	507.8 to 508.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
63570	514.7 to 521.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	$3,960
63571	521.7 to 523.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
63572	523.2 to 526.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,740
63573	529.6 to 534.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820
63509	536.7 to 537.7 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
63510	547.9 to 548.9 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
63574	549.6 to 556.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
63575	566.8 to 577.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
63576	581.9 to 611.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	$17,520
63577	612.5 to 640.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	138	SF	$120	$16,500
63511	632.2 to 633.2 feet	Vertical Change	-.6"	5 ft	5	REF		
63578	641.8 to 645.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
63579	647.7 to 656.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	$5,520
63580	662.0 to 667.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	$3,000
63581	668.3 to 680.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,020
63512	673.4 to 674.4 feet	Vertical Change	-.43"	5 ft	5	REF		
63582	682.1 to 683.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
63583	686.8 to 692.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
63584	695.0 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	244	SF	$120	$29,280
63585	746.3 to 756.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,820
63586	756.0 to 778.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	$13,320

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140800	N GRANADA DR	STEEPLE GATE	W CLEVELAND AVE	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63513	763.7 to 764.7 feet	Vertical Change	.57"	5 ft	5	REF		
63587	780.6 to 784.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
63588	785.5 to 793.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
63589	794.6 to 808.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
63514	810.6 to 811.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
63590	811.9 to 829.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
63591	834.7 to 837.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
63592	840.3 to 846.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
63593	848.2 to 878.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
63594	882.2 to 890.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
63515	883.3 to 884.3 feet	Vertical Change	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N GRANADA DR** *Starting at:* **STEEPLE GATE** **$417,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160810	N GRANADA DR	SUNSET AVE	VALLEY WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68533	0.3 to 8.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
68534	8.5 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68535	14.8 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
68536	40.5 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
68537	45.1 to 55.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
68538	83.9 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
68539	94.3 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68540	130.8 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
68541	151.9 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68542	157.2 to 167.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
68524	190.1 to 191.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
68543	232.8 to 246.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
68640	263.3 to 284.4 feet	Key Note Segment		5 ft	105			
68544	285.3 to 292.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
68545	294.3 to 302.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
68546	312.1 to 313.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
68547	321.2 to 334.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
68548	335.9 to 338.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
68525	343.2 to 344.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
68549	353.3 to 397.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,340**
68550	406.4 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
68551	413.2 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
68552	425.6 to 431.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
68553	433.8 to 449.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
68526	461.4 to 462.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
68554	479.3 to 483.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
68555	486.0 to 497.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
68556	498.0 to 501.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160810	N GRANADA DR	SUNSET AVE	VALLEY WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68557	501.8 to 518.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
68558	518.2 to 519.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$780**
68559	520.9 to 533.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
68560	533.3 to 534.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
68561	534.3 to 539.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
68562	543.0 to 555.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
68563	555.9 to 560.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
68564	561.4 to 571.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
68565	571.6 to 577.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
68566	583.9 to 585.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
68567	591.9 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68568	600.0 to 601.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
68569	604.9 to 606.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
68570	612.7 to 616.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
68571	641.4 to 651.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
68572	651.3 to 653.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
68573	656.0 to 659.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
68574	660.4 to 667.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
68575	694.8 to 700.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
68576	705.9 to 712.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
68577	737.0 to 739.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
68527	742.6 to 743.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
68578	756.4 to 757.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68579	767.2 to 771.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
68580	776.3 to 782.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
68581	785.2 to 787.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
68582	789.1 to 804.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
68583	804.7 to 807.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160810	N GRANADA DR	SUNSET AVE	VALLEY WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68584	809.1 to 810.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68585	814.9 to 816.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68586	837.9 to 843.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
68587	844.7 to 856.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
68588	878.0 to 891.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
68641	899.3 to 920.5 feet	Key Note Segment		5 ft	106			
68589	921.0 to 924.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
68590	924.3 to 925.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68591	936.9 to 946.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
68592	951.8 to 954.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
68593	994.7 to 997.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68594	1005.1 to 1011.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
68595	1011.8 to 1022.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
68596	1023.1 to 1026.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,100**
68597	1026.6 to 1033.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
68598	1034.8 to 1036.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
68599	1036.3 to 1047.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
68600	1048.1 to 1070.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
68601	1071.8 to 1073.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
68602	1077.1 to 1091.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
68642	1093.5 to 1117.6 feet	Key Note Segment		5 ft	120			
68529	1095.8 to 1096.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
68530	1123.8 to 1124.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
68603	1125.0 to 1132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
68604	1134.7 to 1137.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
68605	1138.3 to 1153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
68606	1153.2 to 1165.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
68607	1165.6 to 1170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160810	N GRANADA DR	SUNSET AVE	VALLEY WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68608	1171.3 to 1175.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
68609	1175.8 to 1180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
68610	1180.3 to 1183.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
68611	1183.6 to 1184.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68612	1257.8 to 1270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
68613	1288.8 to 1291.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
68643	1292.5 to 1312.5 feet	Key Note Segment		5 ft	100			
68614	1313.4 to 1317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
68644	1317.8 to 1336.0 feet	Key Note Segment		5 ft	91			
68615	1336.8 to 1342.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
68616	1342.8 to 1348.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
68617	1349.1 to 1350.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
68618	1354.2 to 1366.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
68619	1371.0 to 1379.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
68620	1380.8 to 1381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68621	1386.8 to 1388.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68622	1391.4 to 1402.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
68623	1403.5 to 1405.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
68624	1407.2 to 1409.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
68625	1414.7 to 1420.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
68531	1416.9 to 1417.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
68626	1427.8 to 1435.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
68627	1435.8 to 1440.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
68628	1443.9 to 1453.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
68629	1453.8 to 1461.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
68630	1468.0 to 1476.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
68631	1479.6 to 1482.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
68632	1482.3 to 1493.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160810	N GRANADA DR	SUNSET AVE	VALLEY WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68633	1507.3 to 1509.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68634	1514.0 to 1529.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
68635	1529.2 to 1531.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
68636	1534.9 to 1538.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
68637	1550.0 to 1553.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
68638	1555.8 to 1557.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
68639	1558.2 to 1559.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68532	1563.4 to 1564.4 feet	**Vertical Change**	-.56"	5 ft	5	SF	$75	**$375**
68645	1567.9 to 1570.3 feet		5.0-6.0%	5 ft	12			
68646	1567.9 to 1570.3 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: E *side of* **N GRANADA DR** *Starting at:* **SUNSET AVE** **$436,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160814	N GRANADA DR	VALLEY WAY	PINEWOOD DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68652	0.4 to 2.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	12	SF	$120	**$1,380**
68653	5.1 to 9.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
68654	15.8 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
68655	28.5 to 29.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
68656	29.6 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
68657	37.5 to 43.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
68658	46.1 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**
68647	68.5 to 69.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
68659	68.8 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
68660	75.8 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
68661	89.1 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
68648	93.8 to 94.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
68662	105.3 to 108.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
68649	107.9 to 108.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
68663	111.1 to 122.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
68664	125.3 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
68650	132.8 to 133.8 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
68651	141.8 to 142.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
68665	143.9 to 168.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	124	SF	$120	**$14,820**
68666	169.7 to 194.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	125	SF	$120	**$15,000**
68667	196.8 to 205.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
68668	206.6 to 217.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	55	SF	$120	**$6,540**
68669	217.5 to 222.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
68670	228.2 to 229.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **N GRANADA DR** *Starting at:* **VALLEY WAY** **$100,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150810	N GRANADA DR	W CLEVELAND AVE	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66309	0.2 to 2.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
66310	3.0 to 8.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**
66311	8.8 to 10.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**
66312	10.9 to 19.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
66313	20.1 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66274	20.9 to 21.9 feet	**Vertical Change**	.53"	5 ft	5	REF		
66314	28.7 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
66315	39.5 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
66316	46.4 to 54.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
66275	52.1 to 53.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
66317	57.0 to 58.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
66318	61.4 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
66319	72.2 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
66276	75.8 to 76.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
66320	82.4 to 84.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
66321	85.4 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
66277	86.2 to 87.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
66322	92.1 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
66323	98.8 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
66324	101.3 to 103.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
66325	105.8 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
66326	117.6 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
66327	124.4 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
66328	141.2 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
66329	146.2 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
66330	156.1 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
66279	158.1 to 159.1 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
66331	159.7 to 161.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150810	N GRANADA DR	W CLEVELAND AVE	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66332	163.5 to 166.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
66333	166.2 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
66334	174.8 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
66280	178.5 to 179.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
66335	178.8 to 181.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
66336	182.5 to 185.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
66337	185.5 to 193.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
66338	194.9 to 196.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
66339	197.0 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
66340	217.7 to 227.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
66341	227.5 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
66342	241.8 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
66343	261.0 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
66344	264.3 to 284.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
66345	286.3 to 289.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
66346	289.0 to 290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66347	298.1 to 302.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
66348	303.8 to 316.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
66281	314.7 to 315.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
66349	317.4 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
66350	335.8 to 338.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
66351	339.5 to 343.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
66352	343.7 to 345.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
66353	345.8 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66282	358.2 to 359.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
66354	375.0 to 380.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
66355	383.0 to 396.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
66356	400.5 to 416.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150810	N GRANADA DR	W CLEVELAND AVE	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66357	418.8 to 421.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
66283	430.9 to 431.9 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
66358	434.0 to 443.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
66284	439.5 to 440.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
66285	441.3 to 442.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
66286	449.9 to 450.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
66359	459.0 to 484.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	128	SF	$40	**$5,120**
66287	468.0 to 469.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
66360	502.8 to 504.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
66361	508.6 to 517.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
66288	510.2 to 511.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
66362	518.1 to 521.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
66289	519.3 to 520.3 feet	**Vertical Change**	.64"	5 ft	5	REF		
66363	522.3 to 525.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
66290	526.4 to 527.4 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
66364	539.7 to 542.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
66365	545.9 to 557.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,140**
66366	559.0 to 563.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
66367	582.3 to 586.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
66368	586.7 to 594.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,380**
66369	595.0 to 596.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
66291	597.6 to 598.6 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
66370	598.8 to 601.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
66371	609.4 to 610.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66292	609.7 to 610.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
66372	613.0 to 614.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
66373	616.9 to 620.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
66374	620.8 to 628.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150810	N GRANADA DR	W CLEVELAND AVE	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66293	624.2 to 625.2 feet	Vertical Change	.37"	5 ft	5	REF		
66375	631.4 to 633.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
66376	645.7 to 647.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
66377	649.8 to 667.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
66378	667.8 to 669.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
66379	683.3 to 684.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
66380	690.4 to 693.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
66381	704.8 to 705.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
66382	705.8 to 707.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
66383	714.1 to 721.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
66384	724.1 to 730.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
66385	732.0 to 733.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
66386	735.6 to 739.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
66387	742.5 to 744.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
66388	747.8 to 761.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
66294	751.5 to 752.5 feet	Vertical Change	-.31"	5 ft	5	REF		
66295	760.1 to 761.1 feet	Vertical Change	.31"	5 ft	5	REF		
66389	763.6 to 764.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
66390	767.5 to 771.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
66391	771.2 to 778.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
66392	779.1 to 781.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
66393	787.2 to 788.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
66394	789.7 to 798.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
66296	791.1 to 792.1 feet	Vertical Change	.35"	5 ft	5	REF		
66395	803.2 to 804.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66396	815.7 to 820.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
66397	834.3 to 835.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66297	835.6 to 836.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150810	N GRANADA DR	W CLEVELAND AVE	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66298	843.6 to 844.6 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
66299	848.6 to 849.6 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
66398	860.1 to 873.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160
66399	875.8 to 892.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,260
66400	896.2 to 907.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,660
66300	906.9 to 907.9 feet	Vertical Change	.38"	5 ft	5	REF		
66301	910.8 to 911.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
66302	923.2 to 924.2 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
66303	933.9 to 934.9 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
66401	935.8 to 943.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
66304	937.2 to 938.2 feet	Vertical Change	.27"	5 ft	5	REF		
66305	941.0 to 942.0 feet	Vertical Change	-.59"	5 ft	5	REF		
66306	946.9 to 947.9 feet	Vertical Change	.81"	5 ft	5	REF		
66402	947.6 to 949.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
66403	952.2 to 953.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
66404	957.3 to 980.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	$13,620
66307	979.9 to 980.9 feet	Vertical Change	.26"	5 ft	5	REF		
66405	983.9 to 987.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
66308	996.5 to 997.5 feet	Vertical Change	.53"	5 ft	5	REF		
66406	997.0 to 1010.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,920
66407	1013.8 to 1020.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
66408	1032.1 to 1053.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,660

TOTAL COST FOR: E *side of* **N GRANADA DR** *Starting at:* **W CLEVELAND AVE** **$343,145.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150823	N GRANADA DR	W CLEVELAND AVE	DEBORAH LN	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66538	1.3 to 6.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
66517	2.9 to 3.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
66539	9.1 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
66540	10.7 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
66518	11.8 to 12.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
66519	17.9 to 18.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
66520	22.1 to 23.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
66521	29.0 to 30.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
66541	30.3 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
66522	45.5 to 46.5 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
66542	74.2 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
66523	74.8 to 75.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
66524	79.2 to 80.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
66543	83.6 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
66544	103.2 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
66545	113.8 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
66525	115.1 to 116.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
66546	123.6 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
66526	133.4 to 134.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
66547	136.3 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
66548	144.7 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
66527	146.9 to 147.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
66549	152.5 to 167.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
66528	173.6 to 174.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
66529	178.0 to 179.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
66530	186.6 to 187.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
66550	189.0 to 192.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
66551	202.3 to 203.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150823	N GRANADA DR	W CLEVELAND AVE	DEBORAH LN	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66552	204.1 to 205.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
66553	207.4 to 208.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
66554	209.6 to 238.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
66555	239.4 to 254.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
66531	239.6 to 240.6 feet	**Vertical Change**	1.55"	5 ft	5	REF		
66532	245.0 to 246.0 feet	**Vertical Change**	-.66"	5 ft	5	SF	$75	**$375**
66556	262.3 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66533	277.7 to 278.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
66557	293.5 to 299.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
66558	299.2 to 314.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
66534	303.4 to 304.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
66559	320.3 to 326.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
66535	337.8 to 338.8 feet	**Vertical Change**	1.58"	5 ft	5	SF	$75	**$375**
66563	339.0 to 340.0 feet		7.0-8.0%	5 ft	5			
66560	340.3 to 348.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
66536	345.1 to 346.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
66564	347.5 to 348.8 feet		5.0-6.0%	5 ft	7			
66561	349.7 to 353.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
66562	357.9 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
66565	361.2 to 362.4 feet		5.0-6.0%	5 ft	6			
66537	362.0 to 363.0 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **W CLEVELAND AVE** **$109,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150820	N GRANADA DR	W CLEVELAND DR	2130 N GRANADA DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66469	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	**$1,920**
66452	2.0 to 3.0 feet	**Vertical Change**	.31"	10 ft	10	LF	$75	**$750**
66470	6.9 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	274	SF	$120	**$32,880**
66471	38.0 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	58	SF	$120	**$6,960**
66472	47.6 to 56.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	85	SF	$120	**$10,200**
66473	56.3 to 123.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	674	SF	$120	**$80,880**
66453	65.6 to 69.3 feet	**Vertical Change**	.29"	10 ft	37	REF		
66454	100.7 to 101.7 feet	**Vertical Change**	-.42"	10 ft	10	REF		
66456	127.0 to 128.0 feet	**Vertical Change**	.31"	10 ft	10	LF	$75	**$750**
66474	132.2 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	13	SF	$120	**$1,560**
66475	137.5 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	40	SF	$120	**$4,800**
66476	143.9 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	**$1,320**
66457	149.6 to 150.6 feet	**Vertical Change**	.31"	10 ft	10	REF		
66477	149.8 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	36	SF	$120	**$4,320**
66478	166.5 to 168.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	15	SF	$120	**$1,800**
66479	168.3 to 169.4 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	11	SF	$120	**$1,320**
66480	172.5 to 173.6 feet	Cross Slope (PAR)	7.0-8.0%	10 ft	11	SF	$120	**$1,320**
66481	174.3 to 181.8 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	75	SF	$120	**$9,000**
66482	181.8 to 201.7 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	199	SF	$120	**$23,880**
66483	204.6 to 205.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	13	SF	$120	**$1,560**
66458	207.5 to 208.5 feet	**Vertical Change**	.3"	10 ft	10	REF		
66484	207.6 to 222.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	145	SF	$120	**$17,400**
66485	226.8 to 248.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	217	SF	$120	**$26,040**
66486	250.8 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	249	SF	$120	**$29,880**
66487	277.8 to 350.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	727	SF	$120	**$87,240**
66459	317.5 to 318.5 feet	**Vertical Change**	.63"	10 ft	10	REF		
66488	354.3 to 374.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	197	SF	$120	**$23,640**
66460	366.9 to 367.9 feet	**Vertical Change**	.89"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150820	N GRANADA DR	W CLEVELAND DR	2130 N GRANADA DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66489	375.2 to 389.2 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	140	SF	$120	**$16,800**
66490	390.4 to 392.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	19	SF	$120	**$2,280**
66491	394.5 to 397.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	31	SF	$120	**$3,720**
66492	397.6 to 399.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	**$1,920**
66493	401.4 to 402.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	14	SF	$120	**$1,680**
66494	405.3 to 416.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	109	SF	$120	**$13,080**
66495	416.2 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	41	SF	$120	**$4,920**
66496	421.0 to 426.5 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	55	SF	$120	**$6,600**
66497	427.3 to 430.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	**$4,080**
66498	433.3 to 434.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	13	SF	$120	**$1,560**
66499	434.6 to 452.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	174	SF	$120	**$20,880**
66461	439.1 to 440.1 feet	**Vertical Change**	-.27"	10 ft	10	REF		
66500	456.8 to 473.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	167	SF	$120	**$20,040**
66462	469.9 to 470.9 feet	**Vertical Change**	.41"	10 ft	10	REF		
66501	476.3 to 495.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	193	SF	$120	**$23,160**
66502	497.7 to 498.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	11	SF	$120	**$1,320**
66463	499.6 to 500.6 feet	**Vertical Change**	-.29"	10 ft	10	LF	$75	**$750**
66516	499.8 to 527.5 feet	Key Note Segment		10 ft	277			
66503	528.9 to 532.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	36	SF	$120	**$4,320**
66504	532.5 to 540.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	83	SF	$120	**$9,960**
66464	538.9 to 539.9 feet	**Vertical Change**	.3"	10 ft	10	REF		
66505	540.8 to 554.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	135	SF	$120	**$16,200**
66465	553.2 to 554.2 feet	**Vertical Change**	.29"	10 ft	10	REF		
66506	560.1 to 566.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	60	SF	$120	**$7,200**
66507	568.2 to 573.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	54	SF	$120	**$6,480**
66508	576.3 to 581.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	48	SF	$120	**$5,760**
66509	582.6 to 613.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	312	SF	$120	**$37,440**
66510	617.8 to 634.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	166	SF	$120	**$19,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150820	N GRANADA DR	W CLEVELAND DR	2130 N GRANADA DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66466	621.0 to 622.0 feet	**Vertical Change**	-.26"	10 ft	10	REF		
66511	640.1 to 680.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	399	SF	$120	**$47,880**
66467	666.7 to 667.7 feet	**Vertical Change**	.63"	10 ft	10	REF		
66512	683.0 to 713.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	308	SF	$120	**$36,960**
66468	706.2 to 707.2 feet	**Vertical Change**	.26"	10 ft	10	REF		
66513	717.0 to 723.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	64	SF	$120	**$7,680**
66514	725.5 to 727.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	24	SF	$120	**$2,880**
66515	734.9 to 766.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	316	SF	$120	**$37,920**

TOTAL COST FOR: W *side of* **N GRANADA DR** *Starting at:* **W CLEVELAND DR** **$732,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201133	N H ST	425 N H ST	W 2ND ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40701	0.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	98	SF	$120	**$11,736**
40700	5.7 to 6.7 feet	**Vertical Change**	.37"	6 ft	6	REF		
40702	18.8 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	95	SF	$120	**$11,448**

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **425 N H ST** **$23,184.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201142	N H ST	W 1ST ST	W ROBERTS AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40742	1.9 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	13	SF	$120	**$1,584**
40743	4.3 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	37	SF	$120	**$4,392**
40738	12.4 to 13.4 feet	**Vertical Change**	1.37"	6 ft	6	SF	$75	**$450**
40744	19.5 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
40745	38.4 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,368**
40759	40.8 to 54.2 feet	Key Note Segment		6 ft	80			
40739	43.3 to 44.3 feet	**Vertical Change**	.42"	6 ft	6	REF		
40746	55.5 to 56.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
40747	56.6 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	88	SF	$120	**$10,584**
40748	86.9 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
40749	105.4 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,328**
40740	106.8 to 107.8 feet	**Vertical Change**	.3"	6 ft	6	REF		
40750	116.7 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,256**
40760	124.4 to 135.6 feet	Key Note Segment		6 ft	67			
40751	138.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	66	SF	$120	**$7,920**
40752	153.8 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
40753	161.9 to 172.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	**$7,560**
40761	174.5 to 185.3 feet	Key Note Segment		6 ft	65			
40754	194.0 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,528**
40755	201.1 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	56	SF	$120	**$6,768**
40762	211.0 to 222.8 feet	Key Note Segment		6 ft	71			
40741	211.9 to 212.9 feet	**Vertical Change**	-.3"	6 ft	6	REF		
40756	225.8 to 261.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	214	SF	$120	**$25,632**
40757	264.1 to 270.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	39	SF	$120	**$4,680**
40758	273.0 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	112	SF	$120	**$13,464**

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **W 1ST ST** **$106,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201136	N H ST	W 2ND ST	W 1ST ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40703	14.8 to 15.8 feet	Vertical Change	.84"	6 ft	6	SF	$75	$450
40709	23.2 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	$3,960
40710	48.3 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	$2,880
40711	55.3 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	$2,376
40704	60.0 to 61.0 feet	Vertical Change	-.29"	6 ft	6	LF	$75	$450
40705	69.1 to 70.1 feet	Vertical Change	.26"	6 ft	6	LF	$75	$450
40722	69.8 to 81.6 feet	Key Note Segment		6 ft	71			
40706	83.1 to 84.1 feet	Vertical Change	-.39"	6 ft	6	REF		
40712	83.2 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	14	SF	$120	$1,656
40723	85.5 to 98.0 feet	Key Note Segment		6 ft	75			
40713	98.8 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	12	SF	$120	$1,440
40714	100.8 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	157	SF	$120	$18,864
40724	127.6 to 140.5 feet	Key Note Segment		6 ft	77			
40715	148.8 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	125	SF	$120	$15,048
40725	169.9 to 180.9 feet	Key Note Segment		6 ft	66			
40716	199.1 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	$936
40717	205.9 to 214.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	54	SF	$120	$6,480
40718	232.5 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	$7,560
40726	243.0 to 254.3 feet	Key Note Segment		6 ft	68			
40707	244.9 to 245.9 feet	Vertical Change	.26"	6 ft	6	REF		
40708	255.7 to 256.7 feet	Vertical Change	.31"	6 ft	6	REF		
40719	256.3 to 266.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	$7,416
40720	270.0 to 275.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	$3,600
40721	280.0 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	$3,096

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **W 2ND ST** **$76,662.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201132	N H ST	W 3RD ST	421 N H ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40682	5.9 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,968**
40683	15.0 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,512**
40684	20.8 to 24.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	20	SF	$120	**$2,448**
40685	24.2 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
40686	34.9 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
40687	41.8 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	54	SF	$120	**$6,480**
40688	66.4 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
40697	72.4 to 83.8 feet	Key Note Segment		6 ft	68			
40677	82.2 to 83.2 feet	**Vertical Change**	.4"	6 ft	6	REF		
40698	84.5 to 95.0 feet	Key Note Segment		6 ft	63			
40678	95.1 to 96.1 feet	**Vertical Change**	-.39"	6 ft	6	REF		
40689	95.1 to 96.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	7	SF	$40	**$264**
40690	96.5 to 98.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
40691	103.0 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	115	SF	$120	**$13,752**
40692	128.7 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
40693	145.2 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	72	SF	$120	**$8,640**
40679	174.6 to 175.6 feet	**Vertical Change**	.31"	6 ft	6	REF		
40694	174.7 to 182.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	47	SF	$120	**$5,688**
40695	182.8 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
40680	185.0 to 186.0 feet	**Vertical Change**	.28"	6 ft	6	REF		
40696	189.2 to 200.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	68	SF	$120	**$8,136**
40699	200.5 to 211.8 feet	Key Note Segment		6 ft	68			
40681	201.9 to 202.9 feet	**Vertical Change**	1.04"	6 ft	6	REF		

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **W 3RD ST** **$69,384.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201127	N H ST	W 4TH ST	W 3RD ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40656	2.8 to 3.8 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
40658	6.5 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
40674	19.8 to 47.7 feet	Key Note Segment		5 ft	140			
40659	47.7 to 54.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	32	SF	$40	$1,260
40660	58.0 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	$12,240
40661	79.8 to 86.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
40662	86.0 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
40663	88.2 to 89.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
40664	90.5 to 95.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	27	SF	$120	$3,180
40657	96.1 to 97.1 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
40665	100.8 to 103.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
40666	103.5 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	$21,660
40667	141.7 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
40668	153.8 to 163.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,640
40669	163.4 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
40675	171.6 to 205.5 feet	Key Note Segment		5 ft	170			
40670	205.8 to 224.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	93	SF	$40	$3,700
40676	224.9 to 250.7 feet	Key Note Segment		5 ft	129			
40671	250.7 to 255.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	25	SF	$40	$980
40672	263.0 to 265.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
40673	273.1 to 276.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,740

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **W 4TH ST** **$77,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201144	N H ST	W ROBERTS AVE	713 N H ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40764	0.0 to 8.6 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	52	SF	$120	**$6,192**
40765	10.7 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	217	SF	$120	**$26,064**
40766	46.9 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,488**
40767	57.5 to 69.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	73	SF	$120	**$8,784**
40768	70.5 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
40769	74.5 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	78	SF	$120	**$9,360**
40770	87.8 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	168	SF	$120	**$20,160**
40771	116.8 to 159.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	254	SF	$120	**$30,456**
40772	162.6 to 170.7 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	49	SF	$120	**$5,832**
40763	167.5 to 168.5 feet	**Vertical Change**	.37"	6 ft	6	REF		

TOTAL COST FOR: NE *side of* **N H ST** *Starting at:* **W ROBERTS AVE** **$117,216.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181014	N I ST	137 PARK DR	W 2ND ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36858	1.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
36859	9.9 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
36860	11.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
36861	23.4 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
36862	43.9 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
36869	47.8 to 77.1 feet	Key Note Segment		5 ft	146			
36863	81.6 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
36864	85.1 to 95.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
36852	93.3 to 94.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
36865	98.4 to 164.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	332	SF	$120	**$39,780**
36853	127.7 to 128.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
36854	135.7 to 136.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
36855	172.2 to 175.5 feet	**Vertical Change**	.37"	5 ft	17	LF	$75	**$1,238**
36866	173.8 to 189.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
36856	180.7 to 181.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
36867	189.7 to 193.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
36870	194.8 to 216.0 feet	Key Note Segment		5 ft	106			
36857	205.7 to 206.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
36868	216.0 to 233.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	85	SF	$40	**$3,400**

TOTAL COST FOR: SW *side of* **N I ST** *Starting at:* **137 PARK DR** **$79,877.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105181005	N I ST	730 N I ST	W ROBERTS AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36822	0.3 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
36823	9.4 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
36824	12.5 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,380**
36808	23.5 to 24.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
36809	25.3 to 26.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
36810	30.9 to 31.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
36825	37.2 to 39.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
36811	41.8 to 42.8 feet	**Vertical Change**	1.55"	5 ft	5	REF		
36826	41.9 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
36827	45.8 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
36828	68.4 to 78.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
36812	73.9 to 74.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
36829	78.0 to 162.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	421	SF	$120	**$50,520**
36813	92.4 to 93.4 feet	**Vertical Change**	.58"	5 ft	5	REF		
36814	133.0 to 134.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
36815	144.3 to 145.3 feet	**Vertical Change**	1.13"	5 ft	5	REF		
36830	164.3 to 165.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
36831	165.6 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
36816	168.1 to 169.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
36832	193.6 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
36817	203.7 to 204.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
36818	213.2 to 214.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
36833	216.3 to 218.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
36834	218.8 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
36835	224.9 to 231.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
36836	233.0 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
36819	240.7 to 241.7 feet	**Vertical Change**	3.26"	5 ft	5	REF		
36837	241.7 to 251.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105181005	N I ST	730 N I ST	W ROBERTS AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36838	251.6 to 266.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
36839	269.8 to 282.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
36840	283.0 to 293.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
36841	296.2 to 299.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
36842	300.8 to 325.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
36820	315.6 to 316.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
36821	322.7 to 323.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
36843	324.3 to 326.2 feet		6.0-7.0%	5 ft	10			

TOTAL COST FOR: W *side of* **N I ST** *Starting at:* **730 N I ST** **$162,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181001	N I ST	760 N I ST	760 N I ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36800	0.8 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
36801	22.3 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
36802	37.4 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
36803	51.3 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
36796	56.6 to 57.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
36804	57.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
36805	106.3 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	400	SF	$120	**$47,940**
36797	155.3 to 156.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
36798	169.2 to 170.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
36806	189.2 to 208.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,640**
36807	208.6 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: SE *side of* **N I ST** *Starting at:* **760 N I ST** **$107,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180930	N I ST	FIFTH ST	FOURTH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36657	0.0 to 6.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
36658	6.2 to 21.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
36651	16.8 to 17.8 feet	**Vertical Change**	1.6"	5 ft	5	REF		
36659	22.5 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
36660	30.5 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
36652	31.6 to 32.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
36661	46.6 to 58.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
36662	58.0 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
36663	76.8 to 86.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
36677	88.1 to 113.9 feet	Key Note Segment		5 ft	129			
36664	114.8 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
36665	117.4 to 141.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
36653	138.3 to 139.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
36666	143.6 to 150.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
36667	152.6 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
36668	157.3 to 160.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
36669	163.8 to 169.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
36654	167.2 to 168.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
36670	170.7 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
36655	178.2 to 179.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
36671	199.6 to 211.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
36656	213.2 to 214.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
36672	214.0 to 219.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
36673	221.6 to 234.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
36678	235.1 to 262.9 feet	Key Note Segment		5 ft	139			
36674	264.8 to 266.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
36675	266.7 to 276.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
36676	280.9 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180930	N I ST	FIFTH ST	FOURTH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **N I ST** *Starting at:* **FIFTH ST**								**$119,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180941	N I ST	FOURTH ST	W 2ND ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36712	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
36679	10.3 to 11.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
36713	11.1 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
36742	14.3 to 31.8 feet	Key Note Segment		5 ft	88			
36714	31.8 to 33.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$340**
36680	34.8 to 35.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
36715	35.7 to 36.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
36716	38.5 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	159	SF	$120	**$19,020**
36681	57.9 to 58.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
36682	63.3 to 64.3 feet	**Vertical Change**	1.35"	5 ft	5	REF		
36717	70.2 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
36683	70.6 to 71.6 feet	**Vertical Change**	2.51"	5 ft	5	REF		
36684	80.8 to 81.8 feet	**Vertical Change**	.84"	5 ft	5	REF		
36718	88.6 to 96.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
36685	92.9 to 93.9 feet	**Vertical Change**	.84"	5 ft	5	REF		
36719	98.4 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
36720	113.3 to 120.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
36686	118.5 to 119.5 feet	**Vertical Change**	1.88"	5 ft	5	REF		
36721	121.1 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	314	SF	$120	**$37,620**
36687	130.1 to 131.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
36688	134.3 to 135.3 feet	**Vertical Change**	1.5"	5 ft	5	REF		
36689	141.3 to 142.3 feet	**Vertical Change**	.58"	5 ft	5	REF		
36690	144.5 to 145.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
36691	149.8 to 150.8 feet	**Vertical Change**	2.57"	5 ft	5	REF		
36692	153.5 to 154.5 feet	**Vertical Change**	.56"	5 ft	5	REF		
36693	180.7 to 181.7 feet	**Vertical Change**	2.53"	5 ft	5	REF		
36743	183.8 to 198.8 feet	Key Note Segment		5 ft	75			
36722	203.1 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180941	N I ST	FOURTH ST	W 2ND ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36694	205.9 to 206.9 feet	Vertical Change	.41"	5 ft	5	REF		
36695	210.1 to 211.1 feet	Vertical Change	2.02"	5 ft	5	REF		
36723	231.4 to 234.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
36724	239.7 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
36744	243.5 to 262.0 feet	Key Note Segment		5 ft	93			
36696	252.2 to 253.2 feet	Vertical Change	-.3"	5 ft	5	REF		
36697	268.2 to 269.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
36699	316.7 to 319.6 feet	Vertical Change	-.32"	5 ft	15	LF	$75	**$1,088**
36700	322.6 to 323.6 feet	Vertical Change	.36"	5 ft	5	REF		
36725	323.3 to 325.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
36726	352.0 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
36701	354.6 to 355.6 feet	Vertical Change	-.33"	5 ft	5	REF		
36727	361.3 to 365.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
36702	367.2 to 368.2 feet	Vertical Change	.47"	5 ft	5	LF	$75	**$375**
36728	376.2 to 379.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
36745	383.9 to 406.1 feet	Key Note Segment		5 ft	111			
36704	405.3 to 406.3 feet	Vertical Change	-.26"	5 ft	5	REF		
36729	406.1 to 408.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	**$500**
36730	408.6 to 414.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
36705	420.0 to 421.0 feet	Vertical Change	-.54"	5 ft	5	REF		
36731	421.0 to 431.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
36732	431.3 to 439.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
36706	437.2 to 438.2 feet	Vertical Change	.59"	5 ft	5	REF		
36733	441.9 to 450.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
36746	450.6 to 473.3 feet	Key Note Segment		5 ft	114			
36734	474.3 to 514.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,880**
36735	518.3 to 538.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
36707	527.4 to 528.4 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180941	N I ST	FOURTH ST	W 2ND ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36736	539.6 to 541.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
36737	548.4 to 566.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
36708	589.7 to 590.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
36709	604.8 to 605.8 feet	**Vertical Change**	-.49"	5 ft	5	LF	$75	**$375**
36749	608.1 to 609.2 feet		5.0-6.0%	5 ft	6			
36738	608.6 to 609.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
36747	610.5 to 627.3 feet	Key Note Segment		5 ft	84			
36710	627.0 to 628.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
36739	627.6 to 632.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
36711	631.3 to 632.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
36740	632.8 to 634.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
36748	651.2 to 668.8 feet	Key Note Segment		5 ft	88			
36741	669.4 to 685.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	80	SF	$40	**$3,180**

TOTAL COST FOR: NE *side of* **N I ST** *Starting at:* **FOURTH ST** **$192,907.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180950	N I ST	W 2ND ST	W ROBERTS AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36763	3.2 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
36764	14.9 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
36765	27.1 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
36766	40.3 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
36767	56.0 to 102.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	234	SF	$120	**$28,080**
36750	75.8 to 76.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
36751	78.6 to 79.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
36752	86.1 to 87.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
36781	103.5 to 131.6 feet	Key Note Segment		5 ft	141			
36753	117.0 to 118.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
36754	130.1 to 131.1 feet	**Vertical Change**	-.45"	5 ft	5	REF		
36768	132.6 to 142.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
36769	142.1 to 249.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	537	SF	$120	**$64,440**
36755	155.8 to 156.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
36756	168.7 to 169.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
36757	250.2 to 251.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
36782	250.2 to 276.5 feet	Key Note Segment		5 ft	132			
36758	256.7 to 257.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
36759	263.2 to 264.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
36770	276.5 to 280.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	21	SF	$40	**$820**
36771	280.6 to 291.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
36760	288.5 to 289.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
36772	311.6 to 313.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
36773	316.1 to 317.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
36783	318.7 to 342.3 feet	Key Note Segment		5 ft	118			
36774	349.1 to 374.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
36775	374.9 to 385.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
36784	386.3 to 409.6 feet	Key Note Segment		5 ft	117			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180950	N I ST	W 2ND ST	W ROBERTS AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36776	409.6 to 431.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	109	SF	$40	**$4,340**
36777	434.0 to 463.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
36778	470.4 to 473.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
36779	479.8 to 507.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
36780	523.4 to 525.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NE *side of* **N I ST** *Starting at:* **W 2ND ST** **$198,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181021	N I ST	W 2ND ST	FOURTH ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36883	2.9 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
36884	12.0 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
36885	20.3 to 27.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
36886	27.8 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
36887	69.9 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
36888	89.1 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
36889	98.9 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
36890	114.6 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
36891	132.9 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
36892	142.7 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
36893	168.4 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
36894	174.8 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
36895	182.7 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
36896	189.7 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	231	SF	$120	**$27,660**
36897	238.0 to 278.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
36898	281.2 to 283.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
36899	284.6 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
36921	289.7 to 306.8 feet	Key Note Segment		5 ft	86			
36871	319.7 to 320.7 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
36872	328.4 to 329.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
36900	349.1 to 360.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
36873	362.0 to 363.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
36901	362.1 to 363.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
36902	366.5 to 371.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
36903	371.8 to 373.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
36874	372.8 to 373.8 feet	**Vertical Change**	-.59"	5 ft	5	REF		
36904	374.6 to 382.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
36905	382.0 to 407.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181021	N I ST	W 2ND ST	FOURTH ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36875	393.9 to 394.9 feet	Vertical Change	.35"	5 ft	5	REF		
36906	407.1 to 416.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
36876	415.9 to 416.9 feet	Vertical Change	.3"	5 ft	5	REF		
36907	416.7 to 428.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	61	SF	$120	**$7,260**
36877	428.1 to 429.1 feet	Vertical Change	-1.08"	5 ft	5	REF		
36922	431.3 to 472.8 feet	Key Note Segment		5 ft	208			
36908	474.0 to 505.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,140**
36909	508.1 to 533.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
36910	536.3 to 541.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
36911	542.3 to 545.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
36912	548.2 to 559.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
36878	557.1 to 558.1 feet	Vertical Change	.52"	5 ft	5	REF		
36913	562.3 to 586.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
36879	575.8 to 576.8 feet	Vertical Change	.33"	5 ft	5	REF		
36880	584.4 to 585.4 feet	Vertical Change	.27"	5 ft	5	REF		
36914	588.3 to 605.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
36915	608.4 to 615.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
36916	617.7 to 624.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
36917	624.3 to 629.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
36918	629.9 to 631.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
36919	633.3 to 635.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
36881	633.7 to 634.7 feet	Vertical Change	-.28"	5 ft	5	REF		
36920	638.4 to 642.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
36882	644.0 to 647.8 feet	Vertical Change	-.31"	5 ft	19	LF	$75	**$1,425**

TOTAL COST FOR: SW *side of* **N I ST** *Starting at:* **W 2ND ST** **$265,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105180959	N I ST	W CENTRAL AVE	PARKING LOT ENTRANCE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36790	1.3 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
36791	3.2 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
36785	9.6 to 10.6 feet	**Vertical Change**	.56"	5 ft	5	REF		
36792	46.5 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
36786	46.7 to 47.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
36793	56.3 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
36787	57.9 to 58.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
36788	64.3 to 65.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
36794	69.7 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	502	SF	$120	**$60,180**
36789	159.9 to 160.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
36795	170.0 to 175.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: W *side of* **N I ST** *Starting at:* **W CENTRAL AVE** **$96,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105180925	N I ST	W YOSEMITE AVE	FIFTH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36635	0.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
36636	5.7 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
36637	11.5 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
36638	18.2 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	413	SF	$120	**$49,608**
36639	90.8 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	68	SF	$120	**$8,208**
36640	104.9 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
36641	119.1 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
36642	137.3 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,944**
36649	146.4 to 172.3 feet	Key Note Segment		6 ft	155			
36631	149.0 to 150.0 feet	**Vertical Change**	.98"	6 ft	6	REF		
36643	175.3 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	27	SF	$120	**$3,240**
36632	200.6 to 201.6 feet	**Vertical Change**	.31"	6 ft	6	REF		
36644	200.8 to 217.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	98	SF	$120	**$11,736**
36645	227.5 to 232.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,672**
36633	234.2 to 235.2 feet	**Vertical Change**	.31"	6 ft	6	LF	$75	**$450**
36646	237.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	**$3,600**
36647	245.5 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
36650	251.8 to 281.0 feet	Key Note Segment		6 ft	175			
36648	282.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	120	SF	$120	**$14,400**
36634	301.9 to 302.9 feet	**Vertical Change**	.29"	6 ft	6	REF		

TOTAL COST FOR: NE *side of* **N I ST** *Starting at:* **W YOSEMITE AVE** **$112,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150752	N J ST	108 J ST	W YOSEMITE AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53142	0.0 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
53136	4.6 to 5.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
53143	8.3 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
53137	12.7 to 13.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53144	16.4 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
53145	21.2 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
53151	28.1 to 37.7 feet	Key Note Segment		5 ft	48			
53138	38.3 to 39.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
53139	48.4 to 49.4 feet	**Vertical Change**	-.77"	5 ft	5	SF	$75	**$375**
53146	54.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53152	56.8 to 79.0 feet	Key Note Segment		5 ft	111			
53140	58.7 to 59.7 feet	**Vertical Change**	-.63"	5 ft	5	REF		
53147	80.6 to 84.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
53148	86.8 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
53149	93.1 to 103.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
53141	101.6 to 102.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
53150	103.8 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **108 J ST** **$29,505.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130819	N J ST	5TH ST	6TH ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51260	1.2 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
51261	9.6 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**
51262	25.7 to 28.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,392**
51263	31.0 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
51264	32.8 to 33.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
51265	33.8 to 34.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$480**
51266	36.7 to 38.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	8	SF	$120	**$1,008**
51267	39.5 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
51268	53.8 to 61.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,744**
51278	61.9 to 71.9 feet	Key Note Segment		4 ft	40			
51269	71.9 to 78.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	28	SF	$40	**$1,104**
51252	82.3 to 83.3 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
51253	85.9 to 86.9 feet	**Vertical Change**	.53"	4 ft	4	SF	$75	**$300**
51255	94.5 to 95.5 feet	**Vertical Change**	3.4"	4 ft	4	SF	$75	**$300**
51256	96.7 to 97.7 feet	**Vertical Change**	2.91"	4 ft	4	SF	$75	**$300**
51270	104.0 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
51271	111.6 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
51257	114.6 to 115.6 feet	**Vertical Change**	-.39"	4 ft	4	LF	$75	**$300**
51272	116.1 to 117.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
51258	118.8 to 119.8 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
51279	122.4 to 133.7 feet	Key Note Segment		4 ft	45			
51273	136.3 to 137.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
51274	138.3 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
51275	146.9 to 170.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	96	SF	$120	**$11,520**
51276	176.8 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
51277	183.0 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
51280	188.4 to 200.9 feet	Key Note Segment		4 ft	50			
51259	194.3 to 195.3 feet	**Vertical Change**	2.45"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130819	N J ST	5TH ST	6TH ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51281	217.8 to 230.3 feet	Key Note Segment		4 ft	50			

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **5TH ST** **$40,296.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150750	N J ST	5TH ST	120 N J ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53127	0.7 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
53128	4.8 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
53124	18.2 to 19.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
53129	21.4 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
53130	25.0 to 27.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
53131	27.8 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
53135	33.0 to 34.0 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
53132	35.7 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
53125	39.8 to 40.8 feet	**Vertical Change**	-1.35"	5 ft	5	REF		
53133	46.1 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
53126	46.9 to 47.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
53134	58.3 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **5TH ST** **$26,934.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130816	N J ST	6TH ST	5TH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51238	0.0 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
51228	2.8 to 3.8 feet	**Vertical Change**	-.34"	4 ft	4	REF		
51239	3.5 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
51240	18.9 to 20.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
51241	28.8 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
51249	41.0 to 47.7 feet	Key Note Segment		4 ft	27			
51229	61.0 to 63.6 feet	**Vertical Change**	-.45"	4 ft	10	LF	$75	**$780**
51230	66.2 to 67.2 feet	**Vertical Change**	-.43"	4 ft	4	LF	$75	**$300**
51231	76.5 to 77.5 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
51232	81.7 to 82.7 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**
51250	83.1 to 92.6 feet	Key Note Segment		4 ft	38			
51233	99.0 to 100.0 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
51234	101.2 to 102.2 feet	**Vertical Change**	1.18"	4 ft	4	SF	$75	**$300**
51235	102.8 to 103.8 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**
51236	104.6 to 105.6 feet	**Vertical Change**	.71"	4 ft	4	SF	$75	**$300**
51242	117.7 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
51237	123.1 to 124.1 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
51243	124.3 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51244	149.5 to 163.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	57	SF	$120	**$6,864**
51251	166.6 to 192.3 feet	Key Note Segment		4 ft	103			
51245	242.3 to 246.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**
51246	247.8 to 257.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	40	SF	$120	**$4,752**
51247	257.9 to 277.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	78	SF	$120	**$9,360**
51248	280.0 to 288.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,128**

TOTAL COST FOR: NE *side of* **N J ST** *Starting at:* **6TH ST** **$38,364.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130822	N J ST	6TH ST	7TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51289	4.7 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
51290	13.7 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
51282	22.5 to 23.5 feet	**Vertical Change**	-.31"	4 ft	4	REF		
51291	26.3 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$912**
51292	32.0 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,504**
51310	39.9 to 48.3 feet	Key Note Segment		4 ft	34			
51293	50.3 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
51294	57.9 to 59.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
51295	59.0 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
51296	64.0 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
51297	70.5 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
51283	74.5 to 75.5 feet	**Vertical Change**	.64"	4 ft	4	REF		
51298	78.6 to 80.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
51299	84.9 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
51300	101.5 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$816**
51301	104.8 to 118.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**
51302	119.7 to 129.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,800**
51303	136.7 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
51284	150.3 to 151.3 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
51285	167.3 to 170.6 feet	**Vertical Change**	.47"	4 ft	13	LF	$75	**$990**
51304	186.5 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
51286	188.4 to 189.4 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
51311	188.9 to 204.0 feet	Key Note Segment		4 ft	60			
51305	205.3 to 207.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
51312	216.6 to 236.7 feet	Key Note Segment		4 ft	80			
51306	240.3 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
51307	242.6 to 255.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
51287	297.5 to 298.5 feet	**Vertical Change**	-.37"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130822	N J ST	6TH ST	7TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51308	300.7 to 310.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
51313	307.0 to 308.0 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
51309	313.2 to 328.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
51288	313.5 to 314.5 feet	**Vertical Change**	1.09"	4 ft	4	REF		
51314	333.0 to 334.9 feet		5.0-6.0%	4 ft	8			

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **6TH ST** **$57,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130813	N J ST	7TH ST	6TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51200	0.8 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	54	SF	$120	**$6,480**
51201	15.6 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
51202	21.9 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
51203	44.0 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
51183	46.9 to 47.9 feet	**Vertical Change**	1.48"	4 ft	4	SF	$75	**$300**
51204	50.8 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
51184	54.6 to 55.6 feet	**Vertical Change**	.91"	4 ft	4	REF		
51205	71.5 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
51225	79.4 to 87.0 feet	Key Note Segment		4 ft	30			
51206	87.2 to 90.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	12	SF	$40	**$496**
51207	91.1 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
51208	99.0 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	94	SF	$120	**$11,328**
51226	122.6 to 130.9 feet	Key Note Segment		4 ft	33			
51209	133.5 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51210	137.6 to 143.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
51211	145.7 to 153.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	**$3,888**
51212	157.5 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51213	162.0 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
51214	165.9 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
51185	166.6 to 167.6 feet	**Vertical Change**	.35"	4 ft	4	REF		
51215	170.4 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
51186	171.3 to 172.3 feet	**Vertical Change**	.45"	4 ft	4	REF		
51187	178.2 to 179.2 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
51216	181.5 to 183.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
51217	188.8 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**
51188	192.6 to 193.6 feet	**Vertical Change**	.87"	4 ft	4	SF	$75	**$300**
51227	193.9 to 195.0 feet		6.0-7.0%	4 ft	4			
51189	218.8 to 219.8 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130813	N J ST	7TH ST	6TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51191	233.1 to 234.1 feet	Vertical Change	.38"	4 ft	4	LF	$75	$300
51218	240.8 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	$624
51192	243.5 to 244.5 feet	Vertical Change	.27"	4 ft	4	REF		
51219	244.5 to 246.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	$864
51220	249.1 to 250.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$768
51221	252.9 to 255.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,152
51193	256.8 to 257.8 feet	Vertical Change	.93"	4 ft	4	SF	$75	$300
51194	259.4 to 260.4 feet	Vertical Change	.36"	4 ft	4	LF	$75	$300
51195	263.2 to 264.2 feet	Vertical Change	.33"	4 ft	4	LF	$75	$300
51197	276.6 to 277.6 feet	Vertical Change	1.81"	4 ft	4	SF	$75	$300
51198	279.0 to 280.0 feet	Vertical Change	.36"	4 ft	4	REF		
51222	279.7 to 284.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,400
51223	308.0 to 309.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$720
51224	316.3 to 328.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	$5,712
51199	336.5 to 337.5 feet	Vertical Change	.45"	4 ft	4	LF	$75	$300

TOTAL COST FOR: NE *side of* **N J ST** *Starting at:* **7TH ST** **$56,008.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130824	N J ST	7TH ST	EIGHTH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51327	10.0 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	121	SF	$120	**$14,544**
51315	35.5 to 36.5 feet	**Vertical Change**	.33"	4 ft	4	REF		
51328	40.3 to 54.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,768**
51316	44.7 to 45.7 feet	**Vertical Change**	.27"	4 ft	4	REF		
51329	57.2 to 58.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
51330	58.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,240**
51317	59.8 to 60.8 feet	**Vertical Change**	.28"	4 ft	4	REF		
51319	72.7 to 73.7 feet	**Vertical Change**	.28"	4 ft	4	REF		
51331	73.1 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,296**
51332	80.2 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	114	SF	$120	**$13,632**
51333	111.0 to 115.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,112**
51334	115.8 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,464**
51335	127.8 to 135.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,840**
51336	137.3 to 145.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
51337	147.3 to 163.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	65	SF	$120	**$7,824**
51338	163.6 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
51320	163.8 to 164.8 feet	**Vertical Change**	3.1"	4 ft	4	REF		
51339	185.5 to 190.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,400**
51340	195.1 to 196.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
51341	196.5 to 199.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
51342	201.7 to 207.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,688**
51321	203.9 to 204.9 feet	**Vertical Change**	-.28"	4 ft	4	REF		
51343	207.5 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
51344	213.0 to 215.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,200**
51345	216.0 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	83	SF	$120	**$9,936**
51346	239.0 to 242.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
51347	245.3 to 251.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,880**
51322	252.7 to 253.7 feet	**Vertical Change**	-.42"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130824	N J ST	7TH ST	EIGHTH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51323	261.0 to 262.0 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
51348	265.8 to 277.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	$5,424
51349	279.2 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	$1,488
51324	293.0 to 294.0 feet	Vertical Change	-.38"	4 ft	4	REF		
51350	293.2 to 298.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,640
51325	307.1 to 308.1 feet	Vertical Change	-.58"	4 ft	4	SF	$75	$300
51351	311.7 to 318.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,456
51326	321.7 to 322.7 feet	Vertical Change	.27"	4 ft	4	LF	$75	$300

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **7TH ST** **$109,536.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130807	N J ST	9TH ST	EIGHTH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51125	0.0 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,464**
51113	6.9 to 7.9 feet	**Vertical Change**	-.27"	4 ft	4	REF		
51126	9.3 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	106	SF	$120	**$12,720**
51151	30.6 to 31.6 feet	**Continuous Width**	26"	4 ft	4	SF	$120	**$480**
51127	38.7 to 40.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$720**
51147	40.2 to 50.1 feet	Key Note Segment		4 ft	40			
51128	50.1 to 54.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	17	SF	$40	**$672**
51129	57.4 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51148	81.2 to 90.9 feet	Key Note Segment		4 ft	39			
51114	86.4 to 87.4 feet	**Vertical Change**	.32"	4 ft	4	REF		
51130	96.6 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
51115	99.6 to 100.6 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
51131	104.3 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,400**
51132	109.3 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
51149	126.3 to 134.4 feet	Key Note Segment		4 ft	32			
51133	151.0 to 153.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,152**
51116	151.3 to 152.3 feet	**Vertical Change**	1.41"	4 ft	4	REF		
51134	158.3 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
51117	165.1 to 166.1 feet	**Vertical Change**	.42"	4 ft	4	REF		
51135	169.5 to 181.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,568**
51118	172.9 to 173.9 feet	**Vertical Change**	-.27"	4 ft	4	REF		
51136	183.2 to 188.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,352**
51137	188.1 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	85	SF	$120	**$10,176**
51119	194.3 to 195.3 feet	**Vertical Change**	-.28"	4 ft	4	REF		
51150	209.3 to 223.2 feet	Key Note Segment		4 ft	56			
51120	221.0 to 222.0 feet	**Vertical Change**	.37"	4 ft	4	REF		
51121	244.0 to 245.0 feet	**Vertical Change**	.51"	4 ft	4	REF		
51138	244.2 to 245.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130807	N J ST	9TH ST	EIGHTH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51122	251.0 to 252.0 feet	Vertical Change	.93"	4 ft	4	SF	$75	**$300**
51123	256.5 to 257.5 feet	Vertical Change	-.38"	4 ft	4	LF	$75	**$300**
51139	259.7 to 264.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
51140	270.3 to 285.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
51141	287.3 to 288.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
51142	290.5 to 296.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$3,024**
51124	297.7 to 298.7 feet	Vertical Change	.3"	4 ft	4	LF	$75	**$300**
51143	299.0 to 300.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
51144	300.5 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51145	308.2 to 321.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,144**
51146	326.8 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: NE *side of* **N J ST** *Starting at:* **9TH ST** **$82,848.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130810	N J ST	EIGHTH ST	7TH ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51158	1.0 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
51159	7.0 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
51160	12.8 to 29.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	68	SF	$120	**$8,112**
51179	35.6 to 47.5 feet	Key Note Segment		4 ft	48			
51161	55.7 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
51162	62.9 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
51163	69.7 to 75.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,688**
51164	76.8 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
51152	85.5 to 86.5 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
51165	91.8 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
51153	95.8 to 96.8 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
51154	100.8 to 101.8 feet	**Vertical Change**	.54"	4 ft	4	SF	$75	**$300**
51166	103.6 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
51155	108.8 to 109.8 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
51167	113.2 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51168	116.8 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
51169	136.1 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
51156	146.1 to 147.1 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
51170	152.0 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51180	153.3 to 168.9 feet	Key Note Segment		4 ft	62			
51171	168.9 to 173.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	19	SF	$40	**$752**
51172	176.3 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
51173	189.1 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**
51181	198.5 to 206.9 feet	Key Note Segment		4 ft	34			
51174	212.9 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,608**
51175	230.4 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
51176	246.3 to 251.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
51177	254.8 to 256.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107130810	N J ST	EIGHTH ST	7TH ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51182	259.0 to 267.7 feet	Key Note Segment		4 ft	35			
51178	299.8 to 305.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: NE *side of* **N J ST** *Starting at:* **EIGHTH ST** **$48,812.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107130827	N J ST	EIGHTH ST	9TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51356	41.0 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,128**
51357	52.1 to 53.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
51352	55.9 to 56.9 feet	**Vertical Change**	.27"	4 ft	4	REF		
51358	56.5 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	87	SF	$120	**$10,416**
51353	77.4 to 78.4 feet	**Vertical Change**	.35"	4 ft	4	REF		
51359	85.8 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
51360	108.8 to 110.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
51370	111.4 to 120.5 feet	Key Note Segment		4 ft	36			
51361	130.5 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
51362	137.8 to 140.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
51363	140.5 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,928**
51364	154.7 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
51371	155.7 to 165.3 feet	Key Note Segment		4 ft	38			
51354	175.8 to 176.8 feet	**Vertical Change**	-.67"	4 ft	4	SF	$75	**$300**
51365	180.6 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
51372	207.8 to 216.2 feet	Key Note Segment		4 ft	34			
51366	216.2 to 221.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	22	SF	$40	**$896**
51355	224.8 to 225.8 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
51367	226.3 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
51368	236.1 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
51369	254.0 to 255.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
51373	280.8 to 290.3 feet	Key Note Segment		4 ft	38			
51374	309.0 to 310.0 feet	**Protruding Object**	40"	4 ft	4	JOB	$99	**$99**

TOTAL COST FOR: SW *side of* **N J ST** *Starting at:* **EIGHTH ST** **$36,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191039	N J ST	FOURTH ST	FOURTH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38792	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38789	0.8 to 1.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
38793	28.3 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38794	33.5 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
38795	39.3 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	243	SF	$120	**$29,100**
38796	94.2 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38811	99.4 to 126.4 feet	Key Note Segment		5 ft	135			
38797	128.3 to 131.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
38798	131.6 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
38799	138.8 to 140.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
38800	141.4 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
38790	147.2 to 148.2 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
38801	152.3 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
38802	164.8 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
38803	189.8 to 214.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
38812	214.8 to 236.3 feet	Key Note Segment		5 ft	108			
38804	236.3 to 241.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
38805	245.6 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,920**
38806	288.2 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
38813	296.8 to 314.0 feet	Key Note Segment		5 ft	86			
38791	314.2 to 315.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
38807	314.3 to 316.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
38808	317.5 to 324.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
38809	327.2 to 331.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
38810	331.3 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: SE *side of* **N J ST** *Starting at:* **FOURTH ST** **$95,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150812	N K ST	4TH ST	5TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53291	16.4 to 17.4 feet	Vertical Change	3.43"	5 ft	5	SF	$75	$375
53304	23.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
53292	24.3 to 25.3 feet	Vertical Change	-.41"	5 ft	5	REF		
53305	31.6 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
53293	41.7 to 42.7 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
53294	55.4 to 56.4 feet	Vertical Change	3.52"	5 ft	5	SF	$75	$375
53295	60.1 to 61.1 feet	Vertical Change	1.29"	5 ft	5	SF	$75	$375
53296	62.3 to 65.5 feet	Vertical Change	2.21"	5 ft	16	SF	$75	$1,200
53297	66.8 to 67.8 feet	Vertical Change	2.68"	5 ft	5	SF	$75	$375
53298	71.4 to 72.4 feet	Vertical Change	2.3"	5 ft	5	SF	$75	$375
53299	85.0 to 86.0 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
53306	101.3 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
53307	113.6 to 121.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
53308	128.3 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
53309	148.2 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
53300	148.9 to 149.9 feet	Vertical Change	.26"	5 ft	5	REF		
53301	163.4 to 164.4 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
53310	164.8 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
53311	170.8 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
53312	175.8 to 181.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
53302	176.0 to 177.0 feet	Vertical Change	.27"	5 ft	5	REF		
53303	212.8 to 213.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
53313	214.5 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	$10,680
53314	232.3 to 237.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,820
53315	237.0 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
53318	247.0 to 271.4 feet	Key Note Segment		5 ft	122			
53316	271.7 to 277.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,180
53317	277.0 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150812	N K ST	4TH ST	5TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **4TH ST**								**$50,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140750	N K ST	517 N K ST	9TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51564	1.3 to 6.2 feet	Key Note Segment		5 ft	25			
51555	6.2 to 25.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	96	SF	$40	$3,820
51556	30.0 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
51557	31.8 to 33.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
51558	35.8 to 39.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
51559	48.3 to 51.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	$2,100
51553	58.0 to 61.5 feet	Vertical Change	.26"	5 ft	18	LF	$75	$1,313
51560	63.8 to 65.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$780
51561	66.8 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
51565	74.4 to 87.5 feet	Key Note Segment		5 ft	65			
51562	88.2 to 89.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300
51566	100.2 to 111.1 feet	Key Note Segment		5 ft	55			
51563	111.1 to 114.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	19	SF	$40	$740
51554	147.0 to 148.0 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **517 N K ST** **$13,867.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150744	N K ST	5TH ST	W YOSEMITE AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53074	0.1 to 11.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
53075	11.4 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
53091	18.8 to 35.8 feet	Key Note Segment		5 ft	85			
53066	20.7 to 21.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
53067	37.1 to 38.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
53076	38.9 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
53077	43.0 to 44.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
53078	44.5 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
53079	61.3 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,580**
53068	66.1 to 67.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
53069	89.6 to 90.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
53080	95.2 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53081	104.5 to 105.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
53070	105.8 to 106.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
53082	108.3 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53071	111.2 to 112.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
53072	116.5 to 117.5 feet	**Vertical Change**	-.44"	5 ft	5	REF		
53083	116.7 to 119.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
53084	119.8 to 121.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
53093	123.7 to 124.7 feet	**Protruding Object**	50"	5 ft	5	JOB	$99	**$99**
53073	124.1 to 125.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
53092	141.3 to 165.1 feet	Key Note Segment		5 ft	119			
53085	175.0 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	192	SF	$120	**$23,040**
53086	217.0 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
53087	224.9 to 225.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53088	228.3 to 229.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53089	266.6 to 275.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
53090	281.4 to 286.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150744	N K ST	5TH ST	W YOSEMITE AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **5TH ST**								**$74,754.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140733	N K ST	6TH ST	W YOSEMITE AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51381	6.8 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
51382	49.6 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
51383	58.0 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51384	65.5 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
51385	70.4 to 76.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
51376	74.8 to 75.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
51386	95.2 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
51387	97.6 to 106.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
51388	108.6 to 110.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
51377	109.2 to 110.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
51389	113.0 to 128.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
51378	126.4 to 127.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
51390	130.7 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
51391	144.9 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,540**
51392	178.0 to 179.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
51393	181.2 to 189.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
51397	191.3 to 247.9 feet	Key Note Segment		5 ft	283			
51379	242.0 to 243.0 feet	**Vertical Change**	.69"	5 ft	5	REF		
51394	254.2 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
51395	262.3 to 269.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
51380	265.9 to 266.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
51396	271.3 to 287.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **6TH ST** **$85,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140741	N K ST	6TH ST	7TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51462	0.8 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51463	2.1 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
51444	6.2 to 7.2 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
51464	7.8 to 8.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
51465	11.2 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
51445	13.2 to 16.4 feet	**Vertical Change**	.48"	5 ft	16	LF	$75	**$1,200**
51466	18.6 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
51446	24.6 to 25.6 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
51447	27.7 to 28.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
51467	28.8 to 30.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
51448	31.3 to 32.3 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
51449	34.3 to 35.3 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
51468	40.5 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
51469	45.8 to 48.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
51470	48.5 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
51471	55.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
51494	56.9 to 79.5 feet	Key Note Segment		5 ft	113			
51451	74.0 to 75.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
51472	81.6 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
51473	89.2 to 90.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51495	91.0 to 106.6 feet	Key Note Segment		5 ft	78			
51452	99.7 to 100.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
51474	107.5 to 117.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
51475	117.2 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
51476	124.3 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
51496	130.8 to 145.6 feet	Key Note Segment		5 ft	74			
51477	146.4 to 149.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$540**
51454	147.2 to 148.2 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140741	N K ST	6TH ST	7TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51478	151.3 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
51479	156.4 to 162.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
51480	164.6 to 166.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
51481	166.8 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
51482	171.9 to 176.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
51483	178.3 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
51455	178.4 to 179.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
51497	189.1 to 205.0 feet	Key Note Segment		5 ft	80			
51484	205.7 to 207.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
51485	207.8 to 210.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
51498	211.5 to 218.7 feet	Key Note Segment		5 ft	36			
51486	219.4 to 221.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$460**
51456	224.0 to 225.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
51487	242.1 to 244.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
51457	245.0 to 246.0 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
51458	251.1 to 252.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
51459	257.4 to 258.4 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
51488	260.6 to 262.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
51489	271.4 to 273.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
51499	301.5 to 310.2 feet	Key Note Segment		5 ft	44			
51490	314.3 to 322.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
51491	323.1 to 326.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
51460	327.3 to 328.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
51492	328.3 to 329.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51461	335.5 to 336.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
51493	337.6 to 339.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **6TH ST** **$63,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140759	N K ST	7TH ST	6TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51651	1.0 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
51652	25.7 to 30.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
51653	33.3 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
51654	53.2 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
51646	58.5 to 59.5 feet	**Vertical Change**	-.73"	5 ft	5	REF		
51655	60.8 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
51656	79.8 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
51657	84.0 to 85.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
51658	87.0 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
51659	94.6 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
51660	98.4 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
51661	105.5 to 109.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
51662	112.2 to 113.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
51663	116.3 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
51664	130.8 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
51665	144.4 to 146.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
51666	148.6 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
51667	155.7 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
51668	188.3 to 190.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
51669	193.7 to 198.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
51670	198.6 to 201.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
51671	204.3 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
51647	213.3 to 214.3 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
51680	215.4 to 236.9 feet	Key Note Segment		5 ft	108			
51672	236.9 to 238.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
51673	242.3 to 244.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
51674	246.3 to 248.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
51675	251.2 to 252.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140759	N K ST	7TH ST	6TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51676	264.8 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
51648	294.7 to 295.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
51677	295.1 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
51678	311.7 to 315.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
51649	321.4 to 322.4 feet	**Vertical Change**	1.68"	5 ft	5	SF	$75	**$375**
51679	325.1 to 335.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
51650	333.5 to 334.5 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **7TH ST** **$122,730.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140744	N K ST	7TH ST	EIGHTH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51507	0.0 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
51508	10.7 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
51509	37.4 to 38.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
51500	42.8 to 43.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
51510	48.3 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
51501	63.8 to 64.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
51511	73.8 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
51502	75.5 to 76.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
51503	80.4 to 81.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
51512	86.6 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
51504	95.9 to 96.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
51513	99.2 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
51514	112.6 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51515	127.4 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
51527	136.2 to 144.9 feet	Key Note Segment		5 ft	44			
51516	145.1 to 148.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$740**
51528	154.0 to 164.6 feet	Key Note Segment		5 ft	53			
51517	164.6 to 169.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
51518	178.9 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
51519	204.8 to 205.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
51520	208.6 to 212.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
51529	212.3 to 220.3 feet	Key Note Segment		5 ft	40			
51521	220.3 to 225.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
51522	227.6 to 248.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,720**
51523	250.9 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	134	SF	$120	**$16,080**
51524	278.4 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
51505	287.3 to 288.3 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
51506	310.8 to 311.8 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140744	N K ST	7TH ST	EIGHTH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51525	324.4 to 329.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
51526	332.1 to 339.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**

TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **7TH ST** **$101,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140754	N K ST	9TH ST	EIGHTH ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51574	5.0 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
51600	27.4 to 28.4 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
51567	28.5 to 29.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
51575	33.4 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
51596	37.3 to 45.9 feet	Key Note Segment		5 ft	43			
51568	39.5 to 40.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
51576	57.9 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
51577	73.4 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
51603	76.1 to 78.9 feet		6.0-7.0%	5 ft	14			
51604	78.9 to 80.0 feet		5.0-6.0%	5 ft	5			
51597	82.5 to 90.4 feet	Key Note Segment		5 ft	40			
51578	107.6 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
51579	116.3 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,540**
51598	132.2 to 139.3 feet	Key Note Segment		5 ft	36			
51580	141.4 to 148.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
51581	148.8 to 150.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
51569	151.4 to 152.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
51582	154.3 to 179.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
51583	179.7 to 188.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,340**
51584	189.4 to 193.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
51570	194.4 to 195.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
51585	194.8 to 208.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
51601	202.1 to 203.1 feet	**Protruding Object**	23"	5 ft	5	JOB	$99	**$99**
51586	208.1 to 214.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
51587	215.3 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
51571	215.9 to 216.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
51588	221.5 to 232.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
51599	233.6 to 241.6 feet	Key Note Segment		5 ft	40			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140754	N K ST	9TH ST	EIGHTH ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51589	242.8 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
51602	243.6 to 244.6 feet	**Protruding Object**	45"	5 ft	5	JOB	$99	**$99**
51573	243.8 to 244.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
51590	260.9 to 266.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
51591	270.7 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
51592	283.6 to 300.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$10,020**
51593	306.3 to 314.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
51594	317.1 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
51595	335.1 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
51605	337.8 to 339.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **9TH ST** **$114,207.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140756	N K ST	EIGHTH ST	7TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51617	0.5 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
51618	4.1 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
51606	19.1 to 20.1 feet	**Vertical Change**	.59"	5 ft	5	REF		
51640	36.9 to 46.8 feet	Key Note Segment		5 ft	50			
51619	46.8 to 47.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
51620	51.5 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
51621	59.5 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
51622	72.3 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
51608	76.4 to 77.4 feet	**Vertical Change**	1.8"	5 ft	5	REF		
51623	106.3 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
51641	113.1 to 121.6 feet	Key Note Segment		5 ft	43			
51642	128.5 to 137.3 feet	Key Note Segment		5 ft	44			
51609	130.1 to 131.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
51624	137.3 to 139.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$380**
51625	143.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
51610	146.9 to 147.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		
51626	151.5 to 153.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
51611	155.6 to 156.6 feet	**Vertical Change**	.67"	5 ft	5	REF		
51627	156.3 to 168.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
51643	168.5 to 178.1 feet	Key Note Segment		5 ft	48			
51628	178.7 to 187.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
51629	191.1 to 194.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
51630	195.1 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
51612	211.5 to 212.5 feet	**Vertical Change**	.88"	5 ft	5	SF	$75	**$375**
51644	213.8 to 221.1 feet	Key Note Segment		5 ft	37			
51631	221.5 to 231.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
51632	231.9 to 240.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
51633	240.9 to 243.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140756	N K ST	EIGHTH ST	7TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51634	245.9 to 252.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
51645	252.9 to 262.5 feet	Key Note Segment		5 ft	48			
51613	264.8 to 265.8 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
51635	269.7 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
51636	275.4 to 295.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
51614	296.9 to 297.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
51637	301.4 to 306.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
51638	315.8 to 316.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
51615	318.4 to 319.4 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
51639	322.1 to 336.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
51616	331.3 to 332.3 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **EIGHTH ST** **$108,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140747	N K ST	EIGHTH ST	412 N K ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51530	1.3 to 2.3 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
51537	14.2 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
51538	30.7 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
51539	34.9 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
51551	49.4 to 57.9 feet	Key Note Segment		5 ft	43			
51540	58.4 to 62.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	20	SF	$40	$780
51541	62.5 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	$14,280
51531	70.8 to 71.8 feet	Vertical Change	.27"	5 ft	5	REF		
51542	89.7 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
51543	93.5 to 103.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	$6,120
51544	104.8 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
51533	108.4 to 109.4 feet	Vertical Change	-.3"	5 ft	5	REF		
51545	115.8 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
51546	135.4 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
51547	139.9 to 142.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
51552	142.1 to 150.3 feet	Key Note Segment		5 ft	41			
51534	143.0 to 144.0 feet	Vertical Change	.31"	5 ft	5	REF		
51548	156.3 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
51549	160.3 to 172.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,140
51535	161.8 to 162.8 feet	Vertical Change	.3"	5 ft	5	REF		
51550	172.4 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	$10,140
51536	181.8 to 182.8 feet	Vertical Change	-.3"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **EIGHTH ST** **$58,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150808	N K ST	FIFTH ST	FOURTH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53273	0.3 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
53274	13.4 to 16.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
53257	30.5 to 31.5 feet	**Vertical Change**	-1.09"	5 ft	5	SF	$75	**$375**
53258	64.5 to 65.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53287	77.8 to 88.4 feet	Key Note Segment		5 ft	53			
53259	86.2 to 87.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
53275	89.4 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53276	93.2 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
53288	102.3 to 110.7 feet	Key Note Segment		5 ft	42			
53260	115.0 to 116.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
53277	140.3 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
53261	154.8 to 155.8 feet	**Vertical Change**	-1.16"	5 ft	5	REF		
53278	155.8 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53262	161.7 to 162.7 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
53263	176.8 to 177.8 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
53289	179.9 to 196.8 feet	Key Note Segment		5 ft	85			
53264	181.5 to 182.5 feet	**Vertical Change**	-.45"	5 ft	5	REF		
53265	197.9 to 198.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
53279	198.9 to 200.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
53280	201.2 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53281	208.6 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
53266	212.2 to 213.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
53282	216.8 to 223.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
53283	223.0 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
53290	226.1 to 235.6 feet	Key Note Segment		5 ft	48			
53267	227.8 to 228.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
53268	239.6 to 240.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
53269	241.3 to 244.0 feet	**Vertical Change**	-.49"	5 ft	14	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107150808	N K ST	FIFTH ST	FOURTH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53284	242.2 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53270	244.8 to 245.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
53271	246.5 to 247.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
53272	253.6 to 257.3 feet	**Vertical Change**	.26"	5 ft	19	LF	$75	**$1,388**
53285	255.2 to 256.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53286	265.7 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: NW *side of* **N K ST** *Starting at:* **FIFTH ST** **$31,807.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150747	N K ST	W YOSEMITE AVE	5TH ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53104	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
53105	6.4 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
53106	15.4 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
53107	70.7 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
53121	76.7 to 93.5 feet	Key Note Segment		5 ft	84			
53094	119.5 to 120.5 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
53108	125.1 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
53095	128.4 to 129.4 feet	**Vertical Change**	1.05"	5 ft	5	REF		
53096	131.4 to 132.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53097	141.9 to 142.9 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
53098	148.8 to 149.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
53099	155.1 to 156.1 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
53109	171.3 to 174.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
53122	172.5 to 174.1 feet		5.0-6.0%	5 ft	8			
53100	175.2 to 176.2 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
53110	177.3 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
53111	182.8 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
53112	190.2 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53113	195.2 to 196.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
53114	198.6 to 199.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
53101	203.5 to 204.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
53115	216.0 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
53116	229.6 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53117	240.1 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
53118	251.9 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
53119	259.6 to 265.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
53102	262.8 to 263.8 feet	**Vertical Change**	.55"	5 ft	5	REF		
53120	271.9 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150747	N K ST	W YOSEMITE AVE	5TH ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53103	274.2 to 275.2 feet	Vertical Change	.27"	5 ft	5	REF		
53123	284.9 to 286.5 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: NE *side of* **N K ST** *Starting at:* **W YOSEMITE AVE** **$45,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140737	N K ST	W YOSEMITE AVE	6TH ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51411	0.9 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
51412	12.9 to 14.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
51413	19.0 to 21.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
51414	24.2 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
51415	30.9 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
51416	45.3 to 49.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
51398	50.9 to 51.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
51417	51.1 to 55.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
51399	55.4 to 56.4 feet	**Vertical Change**	.86"	5 ft	5	SF	$75	**$375**
51441	60.8 to 77.5 feet	Key Note Segment		5 ft	84			
51400	71.5 to 72.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
51418	77.8 to 79.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
51419	83.3 to 86.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
51401	87.4 to 88.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
51420	91.9 to 97.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
51421	99.3 to 103.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
51422	103.6 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
51423	108.3 to 112.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
51424	117.8 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
51425	131.8 to 135.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
51426	137.5 to 138.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
51427	139.9 to 141.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
51428	144.3 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51429	150.3 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51402	151.4 to 152.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
51430	155.8 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
51431	159.6 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
51403	180.1 to 181.1 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140737	N K ST	W YOSEMITE AVE	6TH ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51443	185.0 to 186.0 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
51404	186.7 to 187.7 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
51405	189.8 to 190.8 feet	Vertical Change	.42"	5 ft	5	REF		
51432	190.8 to 192.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	7	SF	$120	$780
51433	194.7 to 196.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
51406	194.8 to 195.8 feet	Vertical Change	.26"	5 ft	5	REF		
51442	196.9 to 216.6 feet	Key Note Segment		5 ft	99			
51407	198.1 to 199.1 feet	Vertical Change	.35"	5 ft	5	REF		
51408	208.3 to 209.3 feet	Vertical Change	2.15"	5 ft	5	REF		
51409	213.4 to 214.4 feet	Vertical Change	-.44"	5 ft	5	REF		
51434	217.4 to 219.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
51435	226.0 to 231.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
51436	234.2 to 235.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
51410	235.0 to 236.0 feet	Vertical Change	.27"	5 ft	5	REF		
51437	246.6 to 250.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
51438	250.6 to 252.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
51439	271.3 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
51440	285.8 to 287.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960

TOTAL COST FOR: SW *side of* **N K ST** *Starting at:* **W YOSEMITE AVE** **$77,904.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150820	N L ST	4TH ST	5TH ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53398	1.4 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
53382	18.8 to 19.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
53399	21.4 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
53418	27.8 to 38.8 feet	Key Note Segment		5 ft	55			
53400	38.8 to 66.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	139	SF	$40	**$5,540**
53401	66.7 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
53384	79.1 to 80.1 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
53402	81.2 to 87.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
53419	88.2 to 97.8 feet	Key Note Segment		5 ft	48			
53403	98.3 to 99.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
53404	108.7 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
53405	116.3 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
53420	130.5 to 141.4 feet	Key Note Segment		5 ft	55			
53385	141.3 to 142.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
53386	146.5 to 147.5 feet	**Vertical Change**	2.63"	5 ft	5	SF	$75	**$375**
53406	154.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53387	167.1 to 168.1 feet	**Vertical Change**	1.35"	5 ft	5	SF	$75	**$375**
53421	183.0 to 192.1 feet	Key Note Segment		5 ft	46			
53388	184.4 to 185.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
53407	192.7 to 196.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
53408	200.8 to 202.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
53409	208.9 to 212.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
53410	216.3 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
53389	223.2 to 224.2 feet	**Vertical Change**	-1.17"	5 ft	5	REF		
53411	223.3 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
53390	224.9 to 225.9 feet	**Vertical Change**	.84"	5 ft	5	REF		
53412	229.1 to 230.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
53413	232.3 to 235.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150820	N L ST	4TH ST	5TH ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53414	246.6 to 250.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
53415	250.4 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
53391	251.8 to 252.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
53392	259.2 to 260.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
53416	261.2 to 265.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
53393	263.4 to 264.4 feet	**Vertical Change**	3.07"	5 ft	5	REF		
53394	269.9 to 270.9 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
53395	273.6 to 274.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53396	275.4 to 276.4 feet	**Vertical Change**	1.01"	5 ft	5	SF	$75	**$375**
53397	278.2 to 279.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
53417	284.8 to 286.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: SW *side of* **N L ST** *Starting at:* **4TH ST** **$60,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150737	N L ST	5TH ST	W YOSEMITE AVE	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52998	0.0 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$5,040
52989	13.9 to 14.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
52990	29.9 to 30.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
52991	33.6 to 34.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
52999	35.3 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
53000	38.4 to 39.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
53001	44.4 to 49.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	28	SF	$120	$3,300
52992	47.5 to 48.5 feet	Vertical Change	3.66"	5 ft	5	REF		
53002	51.3 to 54.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
53003	54.6 to 55.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
53004	57.3 to 61.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
53005	64.1 to 66.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
53006	68.9 to 70.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
53007	70.7 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
53020	72.4 to 80.3 feet	Key Note Segment		5 ft	39			
53024	82.8 to 83.8 feet	Protruding Object	65"	5 ft	5	JOB	$99	$99
52993	83.6 to 84.6 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
53008	84.9 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
53009	98.1 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
53010	103.9 to 110.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	$3,900
52994	105.0 to 110.6 feet	Vertical Change	3.55"	5 ft	28	REF		
53011	110.8 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
53021	113.9 to 125.3 feet	Key Note Segment		5 ft	57			
52995	116.4 to 117.4 feet	Vertical Change	3.47"	5 ft	5	REF		
53012	132.3 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
52996	153.2 to 154.2 feet	Vertical Change	3.42"	5 ft	5	SF	$75	$375
53013	162.6 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
53022	169.8 to 186.0 feet	Key Note Segment		5 ft	81			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150737	N L ST	5TH ST	W YOSEMITE AVE	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52997	191.9 to 192.9 feet	Vertical Change	-.5"	5 ft	5	SF	$75	**$375**
53023	196.2 to 206.1 feet	Key Note Segment		5 ft	50			
53014	223.4 to 226.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
53015	233.1 to 243.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
53016	247.3 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53017	252.4 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
53018	271.8 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
53019	282.9 to 289.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: SW *side of* **N L ST** *Starting at:* **5TH ST** **$55,029.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140819	N L ST	6TH ST	W YOSEMITE AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51830	8.1 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
51831	17.0 to 19.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
51832	22.3 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
51833	26.6 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
51834	46.3 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
51825	49.1 to 50.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
51835	52.4 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
51836	60.8 to 71.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
51837	72.7 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
51838	76.7 to 84.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
51847	85.6 to 95.8 feet	Key Note Segment		5 ft	51			
51839	95.9 to 104.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,700**
51826	102.7 to 103.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
51840	104.4 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
51827	111.0 to 112.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
51841	114.4 to 123.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
51828	124.3 to 125.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
51842	125.1 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
51843	138.1 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
51844	144.3 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
51845	155.8 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
51846	171.7 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
51848	183.6 to 213.1 feet	Key Note Segment		5 ft	148			
51829	212.9 to 213.9 feet	**Vertical Change**	1.91"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **6TH ST** **$68,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140828	N L ST	6TH ST	OLIVE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51881	1.0 to 2.0 feet	Vertical Change	-.4"	10 ft	10	LF	$75	$750
51914	2.3 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	104	SF	$120	$12,480
51882	9.6 to 10.6 feet	Vertical Change	.29"	10 ft	10	REF		
51915	18.7 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	134	SF	$120	$16,080
51883	26.8 to 27.8 feet	Vertical Change	.41"	10 ft	10	REF		
51916	33.9 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	215	SF	$120	$25,800
51884	43.9 to 44.9 feet	Vertical Change	.3"	10 ft	10	REF		
51885	52.7 to 53.7 feet	Vertical Change	-.31"	10 ft	10	REF		
51917	58.4 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	149	SF	$120	$17,880
51886	61.2 to 62.2 feet	Vertical Change	-.34"	10 ft	10	REF		
51985	74.3 to 94.6 feet	Key Note Segment		10 ft	203			
51887	76.5 to 77.5 feet	Vertical Change	.39"	10 ft	10	REF		
51888	94.2 to 95.2 feet	Vertical Change	.28"	10 ft	10	REF		
51918	101.8 to 104.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	27	SF	$120	$3,240
51919	105.5 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	130	SF	$120	$15,600
51920	123.3 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	90	SF	$120	$10,800
51921	139.7 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	66	SF	$120	$7,920
51889	153.3 to 154.3 feet	Vertical Change	-.26"	10 ft	10	LF	$75	$750
51922	158.2 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	68	SF	$120	$8,160
51890	161.9 to 162.9 feet	Vertical Change	-.31"	10 ft	10	REF		
51923	169.3 to 171.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	22	SF	$120	$2,640
51924	179.9 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	44	SF	$120	$5,280
51891	187.6 to 188.6 feet	Vertical Change	.29"	10 ft	10	LF	$75	$750
51925	204.3 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	100	SF	$120	$12,000
51926	217.9 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	99	SF	$120	$11,880
51892	230.6 to 231.6 feet	Vertical Change	.39"	10 ft	10	REF		
51927	230.9 to 250.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	192	SF	$120	$23,040
51928	252.4 to 269.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	174	SF	$120	$20,880

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140828	N L ST	6TH ST	OLIVE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51893	264.9 to 265.9 feet	Vertical Change	-.38"	10 ft	10	REF		
51929	270.1 to 273.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	35	SF	$120	$4,200
51894	273.5 to 274.5 feet	Vertical Change	.26"	10 ft	10	REF		
51930	273.6 to 278.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	52	SF	$120	$6,240
51931	281.3 to 282.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	13	SF	$120	$1,560
51932	285.7 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	79	SF	$120	$9,480
51895	290.7 to 291.7 feet	Vertical Change	.52"	10 ft	10	REF		
51933	300.5 to 315.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	153	SF	$120	$18,360
51934	319.6 to 333.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	143	SF	$120	$17,160
51935	335.0 to 346.4 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	114	SF	$120	$13,680
51936	348.3 to 370.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	217	SF	$120	$26,040
51896	363.7 to 364.7 feet	Vertical Change	.27"	10 ft	10	REF		
51937	370.0 to 387.0 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	170	SF	$120	$20,400
51938	389.5 to 407.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	177	SF	$120	$21,240
51939	409.8 to 457.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	481	SF	$120	$57,720
51940	460.3 to 466.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	61	SF	$120	$7,320
51941	469.7 to 482.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	132	SF	$120	$15,840
51942	484.3 to 497.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	127	SF	$120	$15,240
51943	497.9 to 503.7 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	58	SF	$120	$6,960
51944	506.3 to 529.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	236	SF	$120	$28,320
51945	532.3 to 566.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	345	SF	$120	$41,400
51946	570.7 to 626.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	558	SF	$120	$66,960
51897	594.8 to 595.8 feet	Vertical Change	.28"	10 ft	10	REF		
51947	632.5 to 641.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	87	SF	$120	$10,440
51948	641.3 to 650.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	96	SF	$120	$11,520
51949	651.8 to 653.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	$1,920
51898	652.8 to 653.8 feet	Vertical Change	.44"	10 ft	10	REF		
51950	657.4 to 665.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	78	SF	$120	$9,360

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140828	N L ST	6TH ST	OLIVE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51951	666.0 to 671.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	55	SF	$120	**$6,600**
51899	671.2 to 672.2 feet	**Vertical Change**	.31"	10 ft	10	REF		
51952	676.0 to 679.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	38	SF	$120	**$4,560**
51900	682.9 to 683.9 feet	**Vertical Change**	.3"	10 ft	10	REF		
51953	683.4 to 692.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	90	SF	$120	**$10,800**
51901	692.4 to 693.4 feet	**Vertical Change**	.35"	10 ft	10	REF		
51954	692.7 to 707.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	149	SF	$120	**$17,880**
51955	709.8 to 714.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	49	SF	$120	**$5,880**
51902	713.8 to 714.8 feet	**Vertical Change**	-.32"	10 ft	10	REF		
51956	723.2 to 729.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	59	SF	$120	**$7,080**
51957	731.3 to 734.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	30	SF	$120	**$3,600**
51903	734.1 to 735.1 feet	**Vertical Change**	.37"	10 ft	10	REF		
51904	741.5 to 742.5 feet	**Vertical Change**	.31"	10 ft	10	REF		
51958	742.1 to 745.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	29	SF	$120	**$3,480**
51905	744.9 to 745.9 feet	**Vertical Change**	.26"	10 ft	10	REF		
51959	745.2 to 746.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	16	SF	$120	**$1,920**
51906	750.8 to 751.8 feet	**Vertical Change**	-.79"	10 ft	10	REF		
51960	751.5 to 757.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	60	SF	$120	**$7,200**
51907	755.8 to 756.8 feet	**Vertical Change**	.26"	10 ft	10	REF		
51961	768.8 to 770.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	**$1,920**
51962	773.8 to 779.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	55	SF	$120	**$6,600**
51963	780.7 to 785.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	51	SF	$120	**$6,120**
51964	788.4 to 789.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	12	SF	$120	**$1,440**
51965	792.5 to 800.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	76	SF	$120	**$9,120**
51966	811.7 to 818.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	65	SF	$120	**$7,800**
51908	819.4 to 820.4 feet	**Vertical Change**	.29"	10 ft	10	LF	$75	**$750**
51967	830.0 to 850.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	200	SF	$120	**$24,000**
51909	841.4 to 842.4 feet	**Vertical Change**	1.65"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140828	N L ST	6TH ST	OLIVE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51968	855.1 to 875.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	206	SF	$120	**$24,720**
51969	882.5 to 888.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	56	SF	$120	**$6,720**
51910	886.2 to 887.2 feet	**Vertical Change**	-.53"	10 ft	10	REF		
51970	909.8 to 927.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	173	SF	$120	**$20,760**
51911	927.7 to 928.7 feet	**Vertical Change**	2.68"	10 ft	10	SF	$75	**$750**
51986	930.0 to 954.3 feet	Key Note Segment		10 ft	243			
51912	931.5 to 932.5 feet	**Vertical Change**	2.55"	10 ft	10	REF		
51913	935.6 to 936.6 feet	**Vertical Change**	2.56"	10 ft	10	REF		
51971	968.4 to 980.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	124	SF	$120	**$14,880**
51972	989.8 to 993.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	35	SF	$120	**$4,200**
51973	995.8 to 1000.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	50	SF	$120	**$6,000**
51974	1020.8 to 1028.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	80	SF	$120	**$9,600**
51975	1032.6 to 1041.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	89	SF	$120	**$10,680**
51976	1051.7 to 1054.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	26	SF	$120	**$3,120**
51977	1080.4 to 1081.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	15	SF	$120	**$1,800**
51978	1093.8 to 1107.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	138	SF	$120	**$16,560**
51979	1113.2 to 1120.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	76	SF	$120	**$9,120**
51980	1123.3 to 1147.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	240	SF	$120	**$28,800**
51981	1149.6 to 1151.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	18	SF	$120	**$2,160**
51982	1152.0 to 1157.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	53	SF	$120	**$6,360**
51983	1159.8 to 1161.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	15	SF	$120	**$1,800**
51984	1161.5 to 1172.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	111	SF	$120	**$13,320**

TOTAL COST FOR: SW *side of* **N L ST** *Starting at:* **6TH ST** **$915,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140840	N L ST	7TH ST	6TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52082	6.8 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
52083	24.8 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
52070	31.1 to 32.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
52084	51.6 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
52071	59.4 to 60.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
52072	65.9 to 66.9 feet	**Vertical Change**	2.32"	5 ft	5	SF	$75	**$375**
52085	70.3 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
52086	74.7 to 78.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
52087	80.7 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
52073	81.1 to 82.1 feet	**Vertical Change**	.68"	5 ft	5	REF		
52101	85.2 to 93.5 feet	Key Note Segment		5 ft	42			
52074	131.7 to 132.7 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
52075	148.9 to 149.9 feet	**Vertical Change**	3.12"	5 ft	5	REF		
52088	149.8 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
52076	154.4 to 155.4 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
52102	164.0 to 173.6 feet	Key Note Segment		5 ft	48			
52089	174.2 to 177.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
52077	176.2 to 177.2 feet	**Vertical Change**	1.12"	5 ft	5	REF		
52090	184.3 to 190.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
52078	188.0 to 189.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
52091	193.3 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
52103	196.8 to 197.8 feet	**Protruding Object**	40"	5 ft	5	JOB	$99	**$99**
52079	209.1 to 210.1 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
52092	225.6 to 229.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
52080	273.0 to 274.0 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
52093	274.1 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
52104	279.2 to 280.2 feet	**Protruding Object**	50"	5 ft	5	JOB	$99	**$99**
52081	294.0 to 295.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140840	N L ST	7TH ST	6TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52094	295.1 to 297.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
52095	298.1 to 304.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
52096	306.8 to 309.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
52097	312.8 to 318.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
52098	318.7 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
52099	322.8 to 336.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
52100	340.3 to 341.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
52105	340.3 to 342.3 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **7TH ST** **$60,083.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140835	N L ST	EIGHTH ST	7TH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52033	4.3 to 18.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,460**
52034	18.4 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
52035	26.7 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
52011	29.9 to 30.9 feet	Vertical Change	.38"	5 ft	5	REF		
52012	43.0 to 44.0 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
52064	43.3 to 53.3 feet	Key Note Segment		5 ft	50			
52013	49.3 to 50.3 feet	Vertical Change	1.16"	5 ft	5	REF		
52036	53.3 to 61.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	**$1,580**
52037	64.6 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
52038	82.3 to 84.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
52039	84.9 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
52065	86.8 to 91.3 feet	Key Note Segment		5 ft	23			
52040	91.3 to 96.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
52014	96.4 to 97.4 feet	Vertical Change	-.27"	5 ft	5	REF		
52041	103.0 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
52016	105.9 to 106.9 feet	Vertical Change	-.32"	5 ft	5	REF		
52017	107.7 to 108.7 feet	Vertical Change	.29"	5 ft	5	REF		
52018	109.5 to 110.5 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
52042	111.4 to 114.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
52019	113.1 to 114.1 feet	Vertical Change	.29"	5 ft	5	REF		
52069	113.3 to 114.3 feet	Protruding Object	12"	5 ft	5	JOB	$99	**$99**
52020	115.2 to 116.2 feet	Vertical Change	2.95"	5 ft	5	SF	$75	**$375**
52021	117.0 to 122.2 feet	Vertical Change	.29"	5 ft	26	LF	$75	**$1,950**
52022	122.9 to 123.9 feet	Vertical Change	.83"	5 ft	5	SF	$75	**$375**
52043	127.3 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
52066	131.8 to 139.1 feet	Key Note Segment		5 ft	36			
52044	139.8 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
52023	146.2 to 147.2 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140835	N L ST	EIGHTH ST	7TH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52045	149.3 to 150.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
52046	152.3 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
52024	152.6 to 153.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
52047	172.0 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
52048	176.9 to 192.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
52049	194.6 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
52050	198.3 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
52025	200.6 to 201.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
52067	203.8 to 213.1 feet	Key Note Segment		5 ft	47			
52026	206.2 to 207.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
52027	214.6 to 215.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
52051	218.3 to 223.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
52052	225.3 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
52053	228.9 to 232.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
52054	232.8 to 256.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
52028	242.4 to 243.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
52029	257.5 to 258.5 feet	**Vertical Change**	1.15"	5 ft	5	REF		
52055	258.2 to 261.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
52056	265.9 to 270.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
52057	272.6 to 277.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,060**
52030	279.3 to 280.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
52058	280.1 to 282.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
52031	282.0 to 283.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
52059	284.3 to 286.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
52068	286.3 to 296.1 feet	Key Note Segment		5 ft	49			
52060	296.1 to 301.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	28	SF	$40	**$1,140**
52061	301.9 to 303.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
52062	303.6 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140835	N L ST	EIGHTH ST	7TH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52032	322.8 to 323.8 feet	Vertical Change	.44"	5 ft	5	LF	$75	**$375**
52063	342.4 to 344.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **EIGHTH ST** **$103,479.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150816	N L ST	FIFTH ST	FOURTH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53354	2.3 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
53355	34.3 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
53356	39.9 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
53357	44.7 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
53358	48.3 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
53359	55.3 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
53347	56.6 to 57.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
53376	84.9 to 101.8 feet	Key Note Segment		5 ft	85			
53360	101.8 to 107.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
53361	111.7 to 123.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
53348	112.4 to 113.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
53362	123.8 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
53363	127.9 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
53364	133.2 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53365	138.9 to 142.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
53377	144.5 to 156.3 feet	Key Note Segment		5 ft	59			
53349	149.3 to 150.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
53366	156.3 to 178.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	112	SF	$40	**$4,500**
53367	191.4 to 212.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
53350	196.1 to 197.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
53378	213.0 to 223.8 feet	Key Note Segment		5 ft	54			
53368	224.3 to 231.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	37	SF	$40	**$1,460**
53369	231.6 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53370	238.0 to 239.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
53371	255.8 to 257.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
53372	261.0 to 262.9 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	9	SF	$120	**$1,140**
53351	261.2 to 262.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
53352	263.0 to 264.0 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2107150816	N L ST	FIFTH ST	FOURTH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53379	265.5 to 268.5 feet		6.0-7.0%	5 ft	15			
53380	265.5 to 268.5 feet	Running Slope	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
53373	266.0 to 270.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
53374	271.7 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
53375	280.2 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
53353	284.5 to 285.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
53381	294.6 to 295.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: SE *side of* **N L ST** *Starting at:* **FIFTH ST** **$94,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140832	N L ST	OLIVE AVE	9TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51996	0.0 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
52004	11.8 to 20.8 feet	Key Note Segment		5 ft	45			
51987	14.6 to 15.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
51997	42.6 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
51998	53.7 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
52005	66.0 to 73.8 feet	Key Note Segment		5 ft	39			
51988	103.7 to 104.7 feet	**Vertical Change**	3.15"	5 ft	5	SF	$75	**$375**
52006	108.9 to 118.9 feet	Key Note Segment		5 ft	50			
51989	114.5 to 115.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
52007	152.8 to 159.6 feet	Key Note Segment		5 ft	34			
51991	187.9 to 188.9 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
52008	194.9 to 202.5 feet	Key Note Segment		5 ft	38			
51999	226.8 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
52009	236.0 to 251.3 feet	Key Note Segment		5 ft	77			
51992	236.5 to 237.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
51993	251.6 to 252.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
52010	279.9 to 290.9 feet	Key Note Segment		5 ft	55			
51994	302.1 to 303.1 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
52000	328.8 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
52001	340.8 to 345.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
52002	349.6 to 364.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
52003	373.6 to 379.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
51995	396.4 to 397.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **OLIVE AVE** **$28,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150739	N L ST	W YOSEMITE AVE	5TH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53032	2.2 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
53033	25.9 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
53034	42.8 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
53035	46.5 to 48.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
53025	50.2 to 51.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
53026	55.4 to 59.2 feet	**Vertical Change**	.26"	5 ft	19	LF	$75	**$1,425**
53027	66.6 to 67.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53036	73.7 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
53028	86.0 to 90.9 feet	**Vertical Change**	.29"	5 ft	25	LF	$75	**$1,838**
53037	87.3 to 88.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
53038	92.5 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
53029	99.8 to 100.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53039	100.9 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
53051	104.3 to 118.5 feet	Key Note Segment		5 ft	71			
53030	111.7 to 112.7 feet	**Vertical Change**	.59"	5 ft	5	REF		
53040	118.5 to 119.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$260**
53041	126.1 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$24,000**
53042	169.8 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
53043	177.5 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
53044	188.0 to 201.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
53045	203.3 to 205.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
53052	205.4 to 217.6 feet	Key Note Segment		5 ft	61			
53046	217.6 to 226.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,820**
53047	232.9 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
53048	257.3 to 263.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
53031	263.5 to 264.5 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
53049	265.4 to 266.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
53050	266.4 to 289.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150739	N L ST	W YOSEMITE AVE	5TH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53053	286.9 to 288.8 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **W YOSEMITE AVE** **$86,402.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150755	N L ST	W YOSEMITE AVE	5TH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53157	0.4 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
53158	11.8 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
53174	14.8 to 37.9 feet	Key Note Segment		5 ft	116			
53159	38.1 to 40.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
53160	42.3 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
53161	49.8 to 67.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
53162	70.3 to 77.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
53153	76.2 to 77.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
53163	78.7 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
53154	116.2 to 117.2 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
53155	131.6 to 132.6 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
53164	138.3 to 149.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
53165	155.4 to 156.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53166	165.3 to 193.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
53167	196.1 to 200.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
53168	203.3 to 224.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
53169	231.0 to 235.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
53156	235.7 to 236.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
53170	236.3 to 242.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
53171	243.1 to 246.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
53172	249.4 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53175	253.8 to 272.7 feet	Key Note Segment		5 ft	95			
53173	275.5 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
53176	286.3 to 288.1 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: NE *side of* **N L ST** *Starting at:* **W YOSEMITE AVE** **$87,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140821	N L ST	W YOSEMITE AVE	6TH ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51857	0.0 to 13.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
51858	13.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
51859	26.3 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
51860	34.4 to 39.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
51861	39.8 to 41.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
51849	44.4 to 45.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
51862	49.1 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
51879	56.3 to 58.6 feet		5.0-6.0%	5 ft	12			
51880	56.3 to 58.6 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
51863	58.6 to 60.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
51876	60.2 to 83.6 feet	Key Note Segment		5 ft	117			
51864	85.6 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
51850	98.6 to 99.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
51851	109.9 to 110.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
51877	117.3 to 127.8 feet	Key Note Segment		5 ft	53			
51852	121.7 to 122.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
51865	127.8 to 137.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,920**
51866	139.0 to 148.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
51867	151.3 to 176.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,940**
51853	159.4 to 160.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
51868	176.2 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
51869	185.6 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
51870	202.4 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
51854	207.4 to 208.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
51871	222.5 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
51855	224.2 to 225.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
51872	225.8 to 227.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
51878	227.3 to 234.3 feet	Key Note Segment		5 ft	35			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140821	N L ST	W YOSEMITE AVE	6TH ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
51873	236.5 to 262.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,540**
51856	260.7 to 261.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
51874	266.3 to 286.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
51875	287.7 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: SW *side of* **N L ST** *Starting at:* **W YOSEMITE AVE** **$93,885.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201421	N LAKE ST	1016 N LAKE ST	RUSH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41107	0.1 to 1.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
41108	6.1 to 19.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,980**
41109	20.0 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
41110	23.4 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
41105	28.7 to 29.7 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
41120	29.3 to 39.6 feet	Key Note Segment		5 ft	52			
41111	39.9 to 49.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
41112	51.9 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
41113	80.0 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
41114	100.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
41106	107.2 to 108.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
41115	110.5 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
41116	118.7 to 120.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
41117	122.4 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41118	127.0 to 128.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
41119	128.1 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **1016 N LAKE ST** **$44,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021253	N LAKE ST	1804 N LAKE ST	ADELL ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117981	1.0 to 24.1 feet	Key Note Segment		5 ft	116			
117967	12.6 to 13.6 feet	**Vertical Change**	.87"	5 ft	5	REF		
117968	14.2 to 15.2 feet	**Vertical Change**	-1.03"	5 ft	5	REF		
117975	29.4 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
117969	34.1 to 35.1 feet	**Vertical Change**	1.18"	5 ft	5	REF		
117970	48.1 to 49.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
117982	61.9 to 80.1 feet	Key Note Segment		5 ft	91			
117976	83.2 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117977	87.8 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
117978	100.8 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
117983	113.2 to 128.5 feet	Key Note Segment		5 ft	77			
117971	121.1 to 122.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
117979	129.8 to 137.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
117972	131.5 to 132.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
117973	133.2 to 134.2 feet	**Vertical Change**	3.02"	5 ft	5	SF	$75	**$375**
117980	137.6 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
117984	151.9 to 169.2 feet	Key Note Segment		5 ft	87			
117974	161.5 to 162.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **1804 N LAKE ST** **$37,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021204	N LAKE ST	1995 N LAKE ST	E ELLIS ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117926	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117921	5.8 to 6.8 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
117927	9.8 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	210	SF	$120	**$25,260**
117922	16.2 to 17.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
117923	21.1 to 22.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
117924	23.9 to 24.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
117928	52.8 to 59.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
117929	59.3 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
117930	74.7 to 78.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
117931	81.2 to 85.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
117932	85.9 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
117933	103.0 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
117934	106.6 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
117935	123.2 to 128.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,300**
117936	128.7 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
117925	144.7 to 145.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
117937	154.4 to 170.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
117938	170.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
117939	178.5 to 185.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
117940	188.3 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
117941	191.3 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,900**
117942	218.5 to 229.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
117943	229.8 to 234.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **1995 N LAKE ST** **$123,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211404	N LAKE ST	4TH ST	5TH ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43317	4.0 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	193	SF	$120	**$23,100**
43313	62.5 to 63.5 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
43334	67.1 to 68.1 feet		5.0-6.0%	5 ft	5			
43318	91.7 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
43319	128.6 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
43320	160.1 to 170.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
43321	170.8 to 179.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
43322	184.9 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
43323	199.8 to 211.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
43324	215.3 to 216.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
43325	217.4 to 218.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43314	219.6 to 220.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
43326	220.7 to 232.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
43327	232.7 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
43328	241.6 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
43329	255.3 to 258.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
43330	258.1 to 261.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
43315	262.5 to 263.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
43331	266.0 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
43332	271.3 to 279.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
43333	281.2 to 287.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
43316	287.1 to 288.1 feet	**Vertical Change**	.39"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N LAKE ST** *Starting at:* **4TH ST** **$107,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211447	N LAKE ST	5TH ST	4TH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43671	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
43664	9.3 to 10.3 feet	**Vertical Change**	2.83"	5 ft	5	REF		
43672	10.0 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
43673	26.7 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43665	42.3 to 45.2 feet	**Vertical Change**	.33"	5 ft	15	REF		
43674	43.2 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
43675	45.3 to 48.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
43676	51.8 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
43677	55.3 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
43666	57.0 to 58.0 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
43678	65.2 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
43667	65.8 to 66.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
43679	75.0 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43668	75.5 to 80.9 feet	**Vertical Change**	.26"	5 ft	27	REF		
43680	77.4 to 80.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
43681	81.0 to 85.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
43682	85.0 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43683	96.8 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
43684	116.3 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
43685	131.1 to 132.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
43686	132.2 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
43687	137.0 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
43688	145.3 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,660**
43689	176.9 to 180.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
43690	187.1 to 188.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
43691	189.3 to 194.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
43700	194.6 to 212.5 feet	Key Note Segment		5 ft	90			
43669	198.6 to 199.6 feet	**Vertical Change**	.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211447	N LAKE ST	5TH ST	4TH ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43692	216.5 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43693	220.9 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
43694	232.8 to 233.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43695	236.4 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
43701	248.7 to 256.9 feet	Key Note Segment		5 ft	41			
43670	258.4 to 259.4 feet	**Vertical Change**	-.78"	5 ft	5	REF		
43696	258.7 to 260.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43697	262.0 to 276.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
43698	288.9 to 296.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
43699	296.9 to 298.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: NE *side of* **N LAKE ST** *Starting at:* **5TH ST** **$89,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105211440	N LAKE ST	5TH ST	E YOSEMITE AVE	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43617	0.0 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
43618	10.3 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
43613	22.1 to 23.1 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
43619	47.2 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
43620	49.1 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43621	54.5 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
43622	66.5 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
43623	81.8 to 85.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
43624	94.9 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
43625	101.3 to 105.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
43626	116.5 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
43637	134.1 to 151.8 feet	Key Note Segment		5 ft	89			
43627	151.8 to 154.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
43628	155.3 to 157.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**
43629	161.3 to 184.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	114	SF	$120	**$13,680**
43630	184.1 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
43638	186.8 to 205.1 feet	Key Note Segment		5 ft	92			
43631	219.0 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
43632	235.5 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
43633	239.7 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
43614	251.8 to 252.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
43634	256.9 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
43635	270.9 to 272.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
43615	278.9 to 279.9 feet	**Vertical Change**	-.76"	5 ft	5	SF	$75	**$375**
43636	280.1 to 286.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,780**
43616	284.8 to 285.8 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N LAKE ST** *Starting at:* **5TH ST** **$72,905.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021305	N LAKE ST	ADELL ST	ASHLAN WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118019	0.6 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
118020	7.9 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
118021	34.7 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
118022	38.6 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
118023	55.8 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
118024	62.5 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
118067	86.3 to 105.3 feet	Key Note Segment		5 ft	95			
118003	86.9 to 87.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
118004	96.4 to 97.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
118005	105.9 to 106.9 feet	**Vertical Change**	2.86"	5 ft	5	SF	$75	**$375**
118025	107.7 to 109.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
118026	109.6 to 143.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,340**
118006	110.2 to 111.2 feet	**Vertical Change**	1.22"	5 ft	5	REF		
118027	148.0 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
118028	182.8 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
118029	188.6 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
118007	205.4 to 206.4 feet	**Vertical Change**	1.69"	5 ft	5	REF		
118008	213.2 to 214.2 feet	**Vertical Change**	1.41"	5 ft	5	REF		
118030	237.0 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
118031	253.7 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
118032	276.2 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
118033	303.8 to 307.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
118034	316.5 to 319.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
118035	340.6 to 348.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
118036	355.7 to 367.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
118009	360.0 to 361.0 feet	**Vertical Change**	.74"	5 ft	5	REF		
118037	371.1 to 376.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
118038	376.3 to 381.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021305	N LAKE ST	ADELL ST	ASHLAN WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118010	378.6 to 379.6 feet	Vertical Change	1.07"	5 ft	5	REF		
118039	381.2 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
118068	392.2 to 410.5 feet	Key Note Segment		5 ft	92			
118011	393.5 to 394.5 feet	Vertical Change	-.38"	5 ft	5	REF		
118040	412.2 to 414.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
118041	415.0 to 430.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,300
118042	432.5 to 436.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
118043	436.4 to 467.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	$18,540
118012	457.4 to 458.4 feet	Vertical Change	-.27"	5 ft	5	REF		
118044	469.8 to 478.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
118045	481.2 to 485.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
118046	487.4 to 529.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	$24,960
118047	535.5 to 542.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
118013	539.2 to 540.2 feet	Vertical Change	.3"	5 ft	5	REF		
118048	550.5 to 574.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	$14,160
118049	585.3 to 620.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	$21,000
118014	588.4 to 589.4 feet	Vertical Change	.26"	5 ft	5	REF		
118015	621.2 to 622.2 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
118050	624.6 to 635.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
118051	640.8 to 644.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
118052	657.6 to 663.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
118053	668.2 to 707.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	$23,700
118016	679.7 to 680.7 feet	Vertical Change	-.31"	5 ft	5	REF		
118054	716.6 to 720.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
118055	724.7 to 731.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
118056	741.6 to 743.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
118057	757.0 to 772.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
118058	774.3 to 780.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021305	N LAKE ST	ADELL ST	ASHLAN WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118059	783.8 to 785.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
118017	791.5 to 792.5 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
118069	800.5 to 817.9 feet	Key Note Segment		5 ft	87			
118060	825.4 to 829.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
118061	831.7 to 833.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
118062	833.8 to 887.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	267	SF	$120	**$32,040**
118018	845.7 to 846.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
118063	887.2 to 889.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
118064	889.8 to 890.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
118065	890.8 to 892.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
118066	894.2 to 900.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
118070	899.7 to 902.2 feet		5.0-6.0%	5 ft	13			
118071	899.7 to 902.2 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
118072	902.2 to 904.6 feet		6.0-7.0%	5 ft	12			
118073	902.2 to 904.6 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **ADELL ST** **$348,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021141	N LAKE ST	ASHLAN WAY	E CLARK ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117761	0.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
117762	4.3 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
117763	11.3 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117755	15.0 to 16.0 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
117764	16.5 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117765	20.8 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
117766	22.8 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117788	26.3 to 39.0 feet	Key Note Segment		5 ft	64			
117756	27.2 to 28.2 feet	**Vertical Change**	.6"	5 ft	5	REF		
117767	39.8 to 48.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
117757	44.9 to 45.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
117789	52.7 to 59.9 feet	Key Note Segment		5 ft	36			
117758	53.3 to 54.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
117768	66.3 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
117769	68.9 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
117770	75.0 to 76.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
117771	77.8 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
117790	101.4 to 109.8 feet	Key Note Segment		5 ft	42			
117772	115.4 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
117773	122.1 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
117774	126.3 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
117759	134.1 to 135.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
117775	135.8 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
117776	145.1 to 146.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
117791	147.3 to 162.0 feet	Key Note Segment		5 ft	73			
117760	156.2 to 157.2 feet	**Vertical Change**	3.6"	5 ft	5	REF		
117777	190.3 to 192.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
117792	201.3 to 208.7 feet	Key Note Segment		5 ft	37			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021141	N LAKE ST	ASHLAN WAY	E CLARK ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117778	215.3 to 229.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
117779	229.3 to 237.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
117780	239.8 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
117793	243.8 to 257.8 feet	Key Note Segment		5 ft	70			
117781	265.4 to 266.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
117782	268.9 to 272.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
117783	272.0 to 284.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
117784	287.1 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
117785	294.0 to 329.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
117786	339.5 to 343.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117787	346.9 to 352.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **ASHLAN WAY** **$99,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021325	N LAKE ST	ASHLAN WAY	JAMES WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118281	0.0 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
118282	26.8 to 65.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	193	SF	$120	**$23,100**
118283	68.1 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
118284	72.6 to 126.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	267	SF	$120	**$32,040**
118285	126.0 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
118286	128.8 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	150	SF	$120	**$18,000**
118287	159.3 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
118288	183.8 to 185.0 feet		5.0-6.0%	5 ft	6			
118289	185.0 to 187.5 feet		6.0-7.0%	5 ft	13			

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **ASHLAN WAY** **$109,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201356	N LAKE ST	CENTRAL AVE	RIVERSIDE DR	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40963	3.6 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	93	SF	$120	**$11,136**
40964	27.8 to 41.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,672**
40965	42.2 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,512**
40966	66.3 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
40967	72.5 to 87.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	60	SF	$120	**$7,152**
40955	84.0 to 85.0 feet	**Vertical Change**	-.27"	4 ft	4	REF		
40968	87.7 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
40969	104.3 to 117.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	53	SF	$120	**$6,384**
40994	118.4 to 132.8 feet	Key Note Segment		4 ft	58			
40956	131.1 to 132.1 feet	**Vertical Change**	.26"	4 ft	4	REF		
40970	133.9 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	81	SF	$120	**$9,744**
40971	155.2 to 167.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	51	SF	$120	**$6,096**
40995	167.9 to 193.8 feet	Key Note Segment		4 ft	104			
40957	168.7 to 169.7 feet	**Vertical Change**	-.33"	4 ft	4	REF		
40958	191.9 to 192.9 feet	**Vertical Change**	-.29"	4 ft	4	REF		
40972	193.8 to 203.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	40	SF	$40	**$1,584**
40973	203.7 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,616**
40996	222.3 to 297.8 feet	Key Note Segment		4 ft	302			
40959	267.8 to 268.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
40960	296.5 to 297.5 feet	**Vertical Change**	-.31"	4 ft	4	REF		
40974	298.8 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
40975	312.0 to 318.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,168**
40997	320.0 to 353.3 feet	Key Note Segment		4 ft	133			
40976	450.7 to 452.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
40977	464.5 to 465.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
40978	526.1 to 540.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
40979	542.5 to 543.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
40980	543.5 to 545.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201356	N LAKE ST	CENTRAL AVE	RIVERSIDE DR	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40981	551.4 to 565.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
40982	569.7 to 572.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
40983	593.3 to 595.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
40984	595.4 to 618.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	92	SF	$120	**$10,992**
40961	604.4 to 605.4 feet	**Vertical Change**	-.27"	4 ft	4	REF		
40985	618.3 to 619.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
40986	624.5 to 640.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	62	SF	$120	**$7,488**
40987	641.8 to 650.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**
40988	653.8 to 664.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,088**
40962	662.6 to 663.6 feet	**Vertical Change**	.57"	4 ft	4	REF		
40989	669.1 to 671.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
40990	674.4 to 681.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,552**
40991	685.8 to 692.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,408**
40992	695.7 to 712.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
40993	728.3 to 741.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **CENTRAL AVE** **$152,736.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201405	N LAKE ST	DAULTON AVE	E LINCOLN AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41015	4.1 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
41016	36.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
41028	47.7 to 57.5 feet	Key Note Segment		5 ft	49			
41017	57.5 to 73.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	82	SF	$40	**$3,280**
41014	76.7 to 77.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
41018	77.3 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
41019	82.6 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
41020	87.6 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
41021	99.1 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
41029	102.7 to 122.3 feet	Key Note Segment		5 ft	98			
41022	122.6 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
41023	131.7 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
41024	143.1 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
41030	160.6 to 168.7 feet	Key Note Segment		5 ft	41			
41025	168.7 to 177.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,700**
41026	180.3 to 183.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
41027	186.3 to 231.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,820**

TOTAL COST FOR: N *side of* **N LAKE ST** *Starting at:* **DAULTON AVE** **$77,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021201	N LAKE ST	E ADELL ST	1995 N LAKE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117868	1.2 to 6.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
117869	7.0 to 9.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
117870	9.1 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
117859	12.8 to 13.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
117871	36.8 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
117872	47.3 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
117873	55.3 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
117918	57.1 to 88.1 feet	Key Note Segment		5 ft	155			
117860	73.1 to 74.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
117874	91.3 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
117875	105.4 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117876	111.1 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
117877	121.3 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
117878	141.8 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
117879	158.9 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117880	168.8 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
117881	188.6 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
117882	204.2 to 210.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
117883	213.9 to 229.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
117884	232.4 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
117885	247.2 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
117919	255.3 to 281.8 feet	Key Note Segment		5 ft	133			
117886	283.3 to 285.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
117887	291.0 to 302.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
117888	306.5 to 320.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
117889	323.2 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117861	324.7 to 325.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
117890	326.7 to 337.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021201	N LAKE ST	E ADELL ST	1995 N LAKE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117891	339.0 to 351.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
117862	355.0 to 356.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
117892	357.2 to 362.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
117893	364.5 to 377.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
117894	398.4 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
117895	446.8 to 465.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
117863	455.2 to 456.2 feet	**Vertical Change**	.58"	5 ft	5	REF		
117864	467.1 to 468.1 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
117896	468.2 to 476.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
117897	481.0 to 482.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
117898	484.2 to 485.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117899	486.6 to 494.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
117900	497.9 to 510.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
117901	521.2 to 525.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
117902	531.4 to 544.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
117920	548.3 to 560.7 feet	Key Note Segment		5 ft	62			
117903	566.8 to 602.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,300**
117904	607.4 to 609.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
117905	620.9 to 627.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
117906	627.1 to 639.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
117865	633.9 to 634.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
117907	641.8 to 685.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,460**
117866	665.1 to 666.1 feet	**Vertical Change**	.54"	5 ft	5	REF		
117908	690.5 to 714.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
117867	707.4 to 708.4 feet	**Vertical Change**	2.78"	5 ft	5	REF		
117909	717.2 to 722.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
117910	725.0 to 727.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
117911	729.8 to 737.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021201	N LAKE ST	E ADELL ST	1995 N LAKE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117912	742.0 to 745.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
117913	745.4 to 762.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
117914	764.8 to 775.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
117915	775.2 to 793.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
117916	795.8 to 818.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
117917	822.1 to 844.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E ADELL ST** **$289,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021151	N LAKE ST	E CLARK ST	E KENNEDY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117808	2.7 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
117800	5.1 to 6.1 feet	**Vertical Change**	.52"	5 ft	5	REF		
117801	20.6 to 21.6 feet	**Vertical Change**	2.1"	5 ft	5	SF	$75	**$375**
117803	28.2 to 29.2 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
117828	32.1 to 41.0 feet	Key Note Segment		5 ft	45			
117804	32.9 to 33.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
117809	52.5 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
117829	62.8 to 79.2 feet	Key Note Segment		5 ft	82			
117810	80.1 to 84.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
117811	85.4 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
117812	98.8 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
117805	106.5 to 107.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
117813	111.4 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
117830	114.6 to 128.5 feet	Key Note Segment		5 ft	70			
117814	128.5 to 141.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,600**
117815	144.6 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
117816	155.9 to 178.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
117817	184.6 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
117806	209.2 to 210.2 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
117818	211.1 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
117831	223.8 to 234.6 feet	Key Note Segment		5 ft	54			
117819	240.3 to 245.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
117820	248.1 to 261.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
117821	263.6 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
117832	268.3 to 287.0 feet	Key Note Segment		5 ft	94			
117822	287.0 to 309.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	112	SF	$40	**$4,460**
117807	316.6 to 317.6 feet	**Vertical Change**	.76"	5 ft	5	REF		
117823	316.9 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021151	N LAKE ST	E CLARK ST	E KENNEDY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117824	331.6 to 338.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
117825	341.6 to 346.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
117826	349.3 to 350.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
117827	351.1 to 353.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E CLARK ST** **$82,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021115	N LAKE ST	E CLEVELAND AVE	GREEN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117622	3.2 to 15.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
117615	17.9 to 18.9 feet	**Vertical Change**	2.55"	5 ft	5	REF		
117623	17.9 to 19.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
117624	19.6 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
117625	26.4 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
117642	49.8 to 89.0 feet	Key Note Segment		5 ft	196			
117626	89.0 to 111.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	113	SF	$40	**$4,520**
117627	111.6 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
117628	129.6 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
117629	135.4 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
117630	147.6 to 154.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
117631	156.8 to 172.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
117616	160.9 to 161.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
117632	172.2 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
117633	200.9 to 208.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
117643	209.0 to 234.3 feet	Key Note Segment		5 ft	127			
117617	228.7 to 229.7 feet	**Vertical Change**	2.17"	5 ft	5	REF		
117618	231.9 to 232.9 feet	**Vertical Change**	1.44"	5 ft	5	REF		
117634	247.1 to 250.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
117635	265.1 to 269.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
117619	274.9 to 275.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
117636	276.6 to 284.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
117637	286.8 to 289.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
117638	293.2 to 316.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
117620	306.7 to 307.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
117621	315.7 to 316.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
117639	324.3 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
117640	349.3 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021115	N LAKE ST	E CLEVELAND AVE	GREEN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117641	360.6 to 366.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
117644	366.1 to 367.2 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E CLEVELAND AVE** **$113,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201419	N LAKE ST	E CLEVELAND AVE	1030 N LAKE ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41099	0.8 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
41100	2.8 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41101	6.3 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
41097	7.0 to 8.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
41104	8.3 to 71.4 feet	Key Note Segment		5 ft	316			
41098	58.5 to 59.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
41102	71.5 to 88.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
41103	89.1 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **E CLEVELAND AVE** **$14,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021210	N LAKE ST	E ELLIS ST	2001 N LAKE ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117953	2.0 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
117954	10.0 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
117955	14.0 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
117964	14.1 to 15.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117956	26.1 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
117957	34.2 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
117958	38.5 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
117962	44.0 to 69.7 feet	Key Note Segment		5 ft	129			
117959	70.1 to 71.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
117960	74.8 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
117965	98.2 to 99.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117949	105.2 to 106.2 feet	**Vertical Change**	2.14"	5 ft	5	REF		
117961	109.8 to 112.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
117950	111.1 to 112.1 feet	**Vertical Change**	1.55"	5 ft	5	REF		
117963	122.2 to 149.8 feet	Key Note Segment		5 ft	138			
117966	148.7 to 149.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117951	150.4 to 151.4 feet	**Vertical Change**	.63"	5 ft	5	REF		
117952	161.9 to 162.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E ELLIS ST** **$29,412.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021154	N LAKE ST	E KENNEDY ST	E ADELL ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117838	1.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117839	13.0 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
117840	20.9 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117841	26.3 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
117842	48.3 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
117833	65.1 to 66.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
117843	70.2 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
117834	79.0 to 80.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
117844	81.5 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
117845	99.3 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
117855	105.4 to 123.5 feet	Key Note Segment		5 ft	91			
117846	126.8 to 128.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
117847	134.4 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
117848	161.1 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
117849	178.7 to 187.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
117856	187.8 to 202.8 feet	Key Note Segment		5 ft	75			
117850	204.8 to 207.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
117857	209.6 to 224.0 feet	Key Note Segment		5 ft	72			
117851	226.7 to 252.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
117835	234.3 to 235.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
117836	247.2 to 248.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
117858	252.9 to 267.8 feet	Key Note Segment		5 ft	75			
117852	286.8 to 295.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
117837	291.5 to 292.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
117853	295.8 to 304.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
117854	304.3 to 305.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E KENNEDY ST** **$81,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201409	N LAKE ST	E LINCOLN AVE	GARFIELD AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41036	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
41031	0.1 to 1.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
41037	3.9 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
41032	4.4 to 5.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
41033	12.2 to 13.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
41034	14.4 to 15.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
41038	16.6 to 20.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
41059	18.3 to 19.3 feet	**Protruding Object**	36"	5 ft	5	JOB	$99	**$99**
41039	20.3 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
41040	26.2 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
41041	49.6 to 59.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
41056	59.4 to 84.3 feet	Key Note Segment		5 ft	125			
41042	85.0 to 88.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
41043	89.8 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
41044	99.6 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
41045	103.4 to 105.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
41046	107.3 to 110.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
41057	111.3 to 128.7 feet	Key Note Segment		5 ft	87			
41035	112.1 to 113.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
41047	132.7 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41048	146.2 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
41049	164.3 to 166.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
41050	173.6 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
41051	177.8 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
41052	191.5 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
41058	196.8 to 222.5 feet	Key Note Segment		5 ft	129			
41053	222.5 to 223.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
41054	224.0 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201409	N LAKE ST	E LINCOLN AVE	GARFIELD AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41055	228.8 to 232.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **E LINCOLN AVE** **$54,894.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201433	N LAKE ST	E LINCOLN AVE	W SOUTH ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41157	0.1 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
41158	16.4 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	207	SF	$120	**$24,780**
41176	60.5 to 98.7 feet	Key Note Segment		5 ft	191			
41159	99.1 to 100.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
41160	103.3 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41161	112.8 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
41155	120.9 to 121.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
41162	140.3 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
41177	148.8 to 171.5 feet	Key Note Segment		5 ft	113			
41156	164.4 to 165.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
41163	171.5 to 173.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
41164	173.8 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
41165	178.0 to 188.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
41178	188.7 to 212.2 feet	Key Note Segment		5 ft	118			
41166	212.2 to 214.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
41167	216.8 to 222.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
41168	224.8 to 225.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
41169	226.6 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
41179	230.3 to 253.3 feet	Key Note Segment		5 ft	115			
41170	253.3 to 262.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	45	SF	$40	**$1,820**
41180	263.8 to 294.3 feet	Key Note Segment		5 ft	153			
41171	294.9 to 296.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
41172	298.6 to 308.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
41173	313.2 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
41181	317.7 to 340.8 feet	Key Note Segment		5 ft	116			
41174	341.5 to 346.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
41175	354.1 to 357.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **E LINCOLN AVE** **$81,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201641	N LAKE ST	E RIVERSIDE DR	CENTRAL AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42096	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
42132	0.0 to 2.8 feet		5.0-6.0%	5 ft	13			
42133	0.0 to 2.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,512**
42097	24.2 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
42093	37.6 to 38.6 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$338**
42098	41.1 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,778**
42099	149.6 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,268**
42100	156.8 to 158.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
42101	212.5 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
42102	224.0 to 233.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,292**
42103	234.4 to 238.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
42130	264.3 to 295.8 feet	Key Note Segment		5 ft	142			
42104	295.8 to 302.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	28	SF	$40	**$1,116**
42105	305.6 to 311.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,294**
42106	314.7 to 319.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,754**
42107	319.8 to 326.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,402**
42108	328.6 to 329.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$594**
42109	330.3 to 334.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
42110	336.2 to 337.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$540**
42111	337.2 to 352.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	69	SF	$120	**$8,316**
42112	352.6 to 363.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
42113	366.1 to 374.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,428**
42094	375.5 to 376.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
42114	375.5 to 384.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,698**
42115	392.1 to 394.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
42116	394.7 to 405.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,562**
42117	409.2 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
42118	413.5 to 426.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,804**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201641	N LAKE ST	E RIVERSIDE DR	CENTRAL AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42131	426.3 to 450.8 feet	Key Note Segment		5 ft	110			
42095	450.2 to 451.2 feet	Vertical Change	.66"	5 ft	5	REF		
42119	452.3 to 459.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,050**
42120	459.8 to 470.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
42121	471.6 to 481.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,562**
42122	481.9 to 493.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,426**
42123	493.8 to 502.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,752**
42124	503.4 to 505.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,026**
42125	509.6 to 520.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,832**
42126	522.8 to 533.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
42127	535.0 to 545.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,508**
42128	546.2 to 566.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,692**
42129	566.0 to 580.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,668**
42134	580.4 to 581.5 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **E RIVERSIDE DR** **$143,365.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105211443	N LAKE ST	E YOSEMITE AVE	5TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43642	0.0 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
43643	14.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
43644	55.3 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
43645	88.4 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
43661	99.8 to 123.8 feet	Key Note Segment		5 ft	120			
43646	125.2 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
43647	130.6 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
43648	132.3 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
43649	136.0 to 142.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
43650	144.4 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
43662	148.8 to 157.2 feet	Key Note Segment		5 ft	42			
43651	161.8 to 175.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
43652	183.4 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
43653	189.0 to 190.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
43654	216.9 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
43655	224.8 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
43656	241.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
43663	254.1 to 261.8 feet	Key Note Segment		5 ft	39			
43639	255.4 to 256.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
43657	261.8 to 283.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	108	SF	$40	**$4,300**
43640	279.3 to 280.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
43658	284.8 to 286.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
43641	287.9 to 288.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
43659	288.8 to 293.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
43660	293.3 to 295.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: NE *side of* **N LAKE ST** *Starting at:* **E YOSEMITE AVE** **$88,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201413	N LAKE ST	GARFIELD AVE	GRANT AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41061	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
41062	4.9 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
41063	17.9 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
41064	30.3 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
41060	39.7 to 40.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
41074	58.3 to 83.8 feet	Key Note Segment		5 ft	128			
41065	83.8 to 85.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
41066	87.1 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
41067	94.2 to 97.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
41068	97.1 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
41069	102.1 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
41075	104.8 to 125.7 feet	Key Note Segment		5 ft	105			
41070	125.7 to 129.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
41076	129.8 to 145.0 feet	Key Note Segment		5 ft	76			
41071	145.7 to 206.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	306	SF	$120	**$36,660**
41072	207.3 to 218.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
41073	220.7 to 230.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **GARFIELD AVE** **$86,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201416	N LAKE ST	GRANT AVE	E CLEVELAND AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41080	1.8 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
41081	4.8 to 5.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
41082	9.9 to 19.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,700**
41083	20.3 to 21.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
41084	22.3 to 24.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
41085	25.1 to 31.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
41095	31.5 to 123.5 feet	Key Note Segment		5 ft	460			
41077	115.5 to 116.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
41086	125.2 to 128.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
41087	128.4 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41088	135.9 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
41078	149.3 to 150.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
41096	156.0 to 179.3 feet	Key Note Segment		5 ft	117			
41089	179.4 to 180.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
41090	180.8 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
41091	187.2 to 196.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
41079	194.5 to 195.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
41092	196.1 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
41093	207.4 to 214.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
41094	214.9 to 216.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **GRANT AVE** **$41,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021121	N LAKE ST	GREEN WAY	W SHERWOOD WAY	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117663	0.6 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**
117655	13.2 to 14.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
117664	34.8 to 40.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
117656	36.7 to 37.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
117665	42.1 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
117680	49.3 to 69.3 feet	Key Note Segment		5 ft	100			
117666	75.1 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
117657	78.2 to 79.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
117658	88.1 to 89.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
117667	89.5 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
117668	99.3 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
117681	105.2 to 123.9 feet	Key Note Segment		5 ft	94			
117669	123.9 to 126.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
117670	134.4 to 136.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
117671	160.8 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
117682	165.8 to 177.3 feet	Key Note Segment		5 ft	58			
117659	176.7 to 177.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
117672	179.4 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
117673	195.3 to 205.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
117674	205.6 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117683	214.1 to 225.5 feet	Key Note Segment		5 ft	57			
117660	215.3 to 216.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
117675	232.3 to 253.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
117676	258.5 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
117684	268.5 to 280.9 feet	Key Note Segment		5 ft	62			
117677	283.3 to 318.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,300**
117678	322.6 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,420**
117662	333.2 to 334.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021121	N LAKE ST	GREEN WAY	W SHERWOOD WAY	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117679	367.2 to 368.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **GREEN WAY** **$122,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021111	N LAKE ST	GREEN WAY	E CLEVELAND AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117589	13.2 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117585	14.8 to 15.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
117590	52.1 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,300**
117586	68.8 to 69.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
117591	71.2 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
117612	83.2 to 99.4 feet	Key Note Segment		5 ft	81			
117592	110.8 to 111.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
117593	114.8 to 116.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
117594	116.3 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
117595	122.2 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117587	130.5 to 131.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
117596	139.8 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$25,020**
117597	186.5 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
117588	191.7 to 192.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
117598	207.8 to 221.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
117599	229.8 to 231.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
117600	237.4 to 247.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
117601	251.4 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
117602	258.7 to 267.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
117613	268.3 to 302.6 feet	Key Note Segment		5 ft	172			
117603	308.8 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
117604	317.2 to 347.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
117605	350.0 to 351.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117606	366.8 to 390.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
117614	391.6 to 429.8 feet	Key Note Segment		5 ft	191			
117607	430.6 to 440.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
117608	447.3 to 448.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
117609	449.4 to 457.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021111	N LAKE ST	GREEN WAY	E CLEVELAND AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117610	463.1 to 471.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
117611	472.7 to 486.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **GREEN WAY** **$143,730.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021343	N LAKE ST	JAMES WAY	WESSMITH WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118457	3.2 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
118458	10.1 to 13.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
118459	20.3 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
118460	24.0 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
118461	41.7 to 72.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	152	SF	$120	**$18,240**
118462	72.1 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
118463	81.5 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
118464	96.0 to 104.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
118465	107.2 to 109.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
118466	109.7 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
118467	117.4 to 132.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
118469	126.4 to 132.0 feet		5.0-6.0%	5 ft	28			
118470	126.4 to 132.0 feet	Running Slope	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
118471	132.0 to 134.9 feet		6.0-7.0%	5 ft	15			
118468	132.5 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **JAMES WAY** **$64,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105201401	N LAKE ST	RIVERSIDE DR	DAULTON AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40999	7.3 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
41000	29.3 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
41001	46.2 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41002	51.3 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
41003	72.0 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
41004	81.6 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
41005	96.3 to 98.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
41006	99.1 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
41012	101.5 to 123.6 feet	Key Note Segment		5 ft	111			
41007	123.6 to 139.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	79	SF	$40	**$3,140**
41008	140.6 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
41013	144.8 to 175.9 feet	Key Note Segment		5 ft	155			
41009	177.4 to 181.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
41010	183.9 to 195.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
41011	195.8 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
40998	214.4 to 215.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **RIVERSIDE DR** **$72,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201427	N LAKE ST	RUSH ST	E LINCOLN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41125	4.8 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
41126	13.5 to 20.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
41147	20.2 to 43.3 feet	Key Note Segment		5 ft	116			
41121	41.6 to 42.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
41127	45.8 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
41148	74.4 to 98.2 feet	Key Note Segment		5 ft	119			
41122	75.7 to 76.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
41128	99.3 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
41129	101.6 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
41130	119.0 to 120.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
41131	120.1 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41149	124.5 to 147.3 feet	Key Note Segment		5 ft	114			
41132	147.5 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
41133	151.6 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
41134	169.4 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41135	175.0 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
41150	180.9 to 190.5 feet	Key Note Segment		5 ft	48			
41123	194.1 to 195.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
41136	215.0 to 218.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
41151	227.8 to 235.6 feet	Key Note Segment		5 ft	39			
41124	259.7 to 260.7 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
41152	273.3 to 289.3 feet	Key Note Segment		5 ft	80			
41137	289.3 to 291.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$460**
41138	299.5 to 307.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
41139	309.5 to 313.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
41140	315.8 to 317.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41153	320.6 to 345.2 feet	Key Note Segment		5 ft	123			
41141	345.2 to 352.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	37	SF	$40	**$1,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201427	N LAKE ST	RUSH ST	E LINCOLN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41142	352.6 to 353.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
41143	356.4 to 358.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
41144	360.3 to 365.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
41145	369.1 to 375.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
41146	376.9 to 392.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**

TOTAL COST FOR: S *side of* **N LAKE ST** *Starting at:* **RUSH ST** **$78,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021126	N LAKE ST	W SHERWOOD WAY	WESSMITH WAY	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117698	2.5 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
117699	9.8 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
117700	14.6 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
117690	18.0 to 19.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
117701	46.0 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
117702	49.3 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
117717	52.3 to 62.0 feet	Key Note Segment		5 ft	49			
117691	60.5 to 61.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
117703	69.0 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
117704	80.8 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117705	84.7 to 89.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
117718	94.8 to 106.8 feet	Key Note Segment		5 ft	60			
117693	100.1 to 101.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
117706	108.8 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
117694	109.7 to 110.7 feet	**Vertical Change**	1.1"	5 ft	5	REF		
117707	130.8 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
117708	137.3 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
117709	147.3 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
117695	147.5 to 148.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
117719	150.8 to 162.4 feet	Key Note Segment		5 ft	58			
117696	153.8 to 154.8 feet	**Vertical Change**	.78"	5 ft	5	REF		
117697	162.0 to 163.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
117710	164.3 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
117711	171.9 to 175.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
117712	179.4 to 183.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
117713	194.8 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
117714	202.2 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
117715	217.3 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021126	N LAKE ST	W SHERWOOD WAY	WESSMITH WAY	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117716	229.3 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **W SHERWOOD WAY** **$65,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021432	N LAKE ST	W SHERWOOD WAY	GREEN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118804	21.8 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
118800	29.4 to 30.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
118805	29.7 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
118806	32.9 to 34.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
118807	34.3 to 42.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
118808	45.1 to 48.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
118809	48.5 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,060**
118810	81.2 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
118811	86.1 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
118812	106.4 to 107.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
118817	107.8 to 128.7 feet	Key Note Segment		5 ft	104			
118801	114.5 to 115.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
118813	130.3 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
118814	135.7 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
118815	145.5 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,340**
118802	153.9 to 154.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
118816	195.0 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
118818	219.8 to 223.8 feet		5.0-6.0%	5 ft	20			
118819	219.8 to 223.8 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
118820	224.0 to 227.8 feet		6.0-7.0%	5 ft	19			
118821	225.6 to 227.8 feet	Running Slope	7.0-8.0%	5 ft	11	SF	$120	**$1,320**
118803	227.8 to 228.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **W SHERWOOD WAY** **$88,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2105201436	N LAKE ST	W SOUTH ST	E RIVERSIDE DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41183	0.3 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
41184	8.1 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
41185	27.9 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
41186	44.3 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
41187	53.1 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
41188	77.4 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
41182	87.0 to 88.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
41189	98.4 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
41190	110.2 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**
41191	148.6 to 154.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
41192	155.8 to 171.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
41193	171.8 to 178.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
41194	179.1 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **W SOUTH ST** **$70,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021130	N LAKE ST	WESSMITH WAY	ASHLAN WAY	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117727	0.1 to 2.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
117728	4.1 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
117720	6.3 to 7.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
117729	10.0 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
117745	20.9 to 32.3 feet	Key Note Segment		5 ft	57			
117730	34.8 to 37.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
117731	40.9 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
117732	48.2 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117721	49.0 to 50.0 feet	**Vertical Change**	.7"	5 ft	5	REF		
117746	49.3 to 60.0 feet	Key Note Segment		5 ft	54			
117733	62.3 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
117734	64.0 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117735	68.5 to 93.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
117722	72.0 to 73.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
117747	94.8 to 106.5 feet	Key Note Segment		5 ft	59			
117723	106.1 to 107.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
117736	108.9 to 113.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
117737	113.7 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
117724	114.7 to 115.7 feet	**Vertical Change**	.91"	5 ft	5	REF		
117738	137.1 to 140.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
117748	140.3 to 156.5 feet	Key Note Segment		5 ft	81			
117725	140.9 to 141.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
117739	158.7 to 159.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117740	160.2 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
117741	164.6 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
117726	168.2 to 169.2 feet	**Vertical Change**	.47"	5 ft	5	REF		
117742	182.9 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
117749	188.0 to 205.9 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202021130	N LAKE ST	WESSMITH WAY	ASHLAN WAY	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117743	207.9 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
117744	210.1 to 226.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**

TOTAL COST FOR: E *side of* **N LAKE ST** *Starting at:* **WESSMITH WAY** **$74,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021400	N LAKE ST	WESSMITH WAY	W SHERWOOD WAY	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118655	0.0 to 4.0 feet		5.0-6.0%	5 ft	20			
118656	0.0 to 4.0 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
118641	0.8 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
118642	11.8 to 20.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
118643	23.2 to 38.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
118644	38.4 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
118645	49.4 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
118637	98.6 to 99.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
118646	107.0 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
118647	114.1 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
118648	130.3 to 131.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
118649	133.9 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
118650	143.8 to 153.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,060**
118651	155.1 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
118652	162.3 to 166.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
118653	166.9 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
118654	194.3 to 203.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
118639	199.9 to 200.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
118640	206.4 to 207.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
118657	210.3 to 214.3 feet		5.0-6.0%	5 ft	20			
118658	210.3 to 214.3 feet	Running Slope	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
118659	216.8 to 218.0 feet		8.0-9.0%	5 ft	6			

TOTAL COST FOR: W *side of* **N LAKE ST** *Starting at:* **WESSMITH WAY** **$72,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150829	N M ST	206 N M ST	5TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53479	5.4 to 6.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53482	6.9 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
53480	11.9 to 12.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
53483	20.2 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
53481	31.8 to 32.8 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
53484	33.0 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
53485	41.2 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **N M ST** *Starting at:* **206 N M ST** **$10,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150827	N M ST	4TH ST	210 N M ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53462	4.8 to 5.8 feet	Vertical Change	.94"	5 ft	5	SF	$75	$375
53476	7.7 to 17.6 feet	Key Note Segment		5 ft	50			
53463	14.9 to 15.9 feet	Vertical Change	.31"	5 ft	5	REF		
53467	21.0 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,980
53468	55.8 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
53469	68.2 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
53470	84.4 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
53471	94.6 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
53472	102.3 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
53477	114.6 to 128.7 feet	Key Note Segment		5 ft	70			
53473	129.5 to 131.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
53474	132.8 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
53464	149.0 to 150.0 feet	Vertical Change	1.06"	5 ft	5	REF		
53475	149.9 to 167.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	$10,620
53465	156.4 to 157.4 feet	Vertical Change	.35"	5 ft	5	REF		
53478	168.4 to 178.2 feet	Key Note Segment		5 ft	49			
53466	177.7 to 178.7 feet	Vertical Change	.3"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N M ST** *Starting at:* **4TH ST** **$35,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150824	N M ST	5TH ST	4TH ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53454	0.0 to 5.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
53455	6.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
53456	11.6 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
53449	21.3 to 22.3 feet	**Vertical Change**	2.41"	5 ft	5	SF	$75	**$375**
53457	26.2 to 28.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
53450	29.1 to 30.1 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
53451	37.8 to 38.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53452	50.8 to 51.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
53458	59.9 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
53459	62.3 to 75.3 feet	Key Note Segment		5 ft	65			
53453	80.4 to 81.4 feet	**Vertical Change**	.89"	5 ft	5	SF	$75	**$375**
53460	84.9 to 93.2 feet	Key Note Segment		5 ft	42			
53461	126.1 to 134.6 feet	Key Note Segment		5 ft	43			

TOTAL COST FOR: NE *side of* **N M ST** *Starting at:* **5TH ST** **$13,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150939	N M ST	5TH ST	W YOSEMITE AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53811	8.8 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
53812	18.0 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
53813	27.3 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
53814	31.9 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
53828	34.1 to 54.1 feet	Key Note Segment		5 ft	100			
53803	35.8 to 36.8 feet	**Vertical Change**	-.4"	5 ft	5	REF		
53804	54.3 to 55.3 feet	**Vertical Change**	-.5"	5 ft	5	REF		
53815	54.6 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
53816	73.4 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,940**
53817	79.2 to 127.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	240	SF	$120	**$28,740**
53805	81.8 to 82.8 feet	**Vertical Change**	-.47"	5 ft	5	REF		
53806	122.0 to 123.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
53818	127.3 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
53807	142.6 to 143.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
53819	160.8 to 164.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,100**
53808	165.2 to 166.2 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
53820	166.9 to 168.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
53821	170.7 to 171.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
53829	172.2 to 186.3 feet	Key Note Segment		5 ft	71			
53822	186.3 to 187.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
53823	191.5 to 197.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
53830	200.3 to 202.0 feet		6.0-7.0%	5 ft	9			
53809	204.2 to 205.2 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
53810	207.3 to 208.3 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
53824	208.5 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
53825	219.7 to 231.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
53826	237.3 to 249.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
53827	277.7 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150939	N M ST	5TH ST	W YOSEMITE AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW	*side of* **N M ST**	*Starting at:* **5TH ST**						**$99,065.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140846	N M ST	6TH ST	W YOSEMITE AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52164	0.9 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
52137	3.0 to 4.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
52138	15.8 to 16.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
52165	18.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
52139	35.0 to 36.0 feet	**Vertical Change**	2.14"	5 ft	5	SF	$75	**$375**
52140	37.2 to 38.2 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
52141	39.5 to 47.3 feet	**Vertical Change**	1.91"	5 ft	39	SF	$75	**$2,925**
52142	50.9 to 67.7 feet	**Vertical Change**	2.1"	5 ft	84	SF	$75	**$6,300**
52166	58.1 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
52167	71.0 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
52143	71.2 to 74.5 feet	**Vertical Change**	2.17"	5 ft	17	REF		
52184	76.3 to 79.0 feet		5.0-6.0%	5 ft	14			
52185	76.3 to 79.0 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
52144	78.0 to 79.0 feet	**Vertical Change**	2.14"	5 ft	5	SF	$75	**$375**
52145	80.2 to 81.2 feet	**Vertical Change**	2.4"	5 ft	5	SF	$75	**$375**
52146	82.0 to 83.0 feet	**Vertical Change**	3.05"	5 ft	5	SF	$75	**$375**
52147	88.9 to 96.7 feet	**Vertical Change**	2.3"	5 ft	39	SF	$75	**$2,925**
52168	93.1 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
52148	102.5 to 110.3 feet	**Vertical Change**	2.18"	5 ft	39	REF		
52169	111.3 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
52149	113.8 to 119.3 feet	**Vertical Change**	2.28"	5 ft	28	REF		
52181	120.6 to 127.4 feet	Key Note Segment		5 ft	34			
52150	122.9 to 128.4 feet	**Vertical Change**	2.19"	5 ft	28	REF		
52170	127.4 to 130.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$620**
52171	131.2 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
52151	131.9 to 146.5 feet	**Vertical Change**	2.19"	5 ft	73	REF		
52152	147.7 to 160.0 feet	**Vertical Change**	2.49"	5 ft	62	SF	$75	**$4,613**
52172	154.8 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140846	N M ST	6TH ST	W YOSEMITE AVE	107

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52153	163.6 to 173.6 feet	Vertical Change	2.46"	5 ft	50	SF	$75	$3,750
52182	166.4 to 173.8 feet	Key Note Segment		5 ft	37			
52173	173.8 to 215.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	208	SF	$40	$8,300
52154	174.9 to 175.9 feet	Vertical Change	2.93"	5 ft	5	REF		
52155	177.1 to 182.6 feet	Vertical Change	2.43"	5 ft	28	REF		
52156	186.1 to 198.5 feet	Vertical Change	2.43"	5 ft	62	REF		
52157	202.0 to 203.0 feet	Vertical Change	2.42"	5 ft	5	REF		
52158	206.5 to 207.5 feet	Vertical Change	2.52"	5 ft	5	REF		
52159	211.0 to 227.9 feet	Vertical Change	2.52"	5 ft	85	REF		
52183	215.7 to 221.8 feet	Key Note Segment		5 ft	31			
52174	221.8 to 225.5 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	19	SF	$40	$740
52175	225.5 to 228.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
52176	231.0 to 249.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	$11,280
52160	231.4 to 248.2 feet	Vertical Change	2.6"	5 ft	84	REF		
52161	251.8 to 255.0 feet	Vertical Change	2.46"	5 ft	16	REF		
52177	252.4 to 258.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,780
52162	260.8 to 270.9 feet	Vertical Change	2.47"	5 ft	50	SF	$75	$3,788
52178	262.7 to 266.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
52179	269.1 to 271.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
52180	273.8 to 292.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	$11,220
52163	274.4 to 293.5 feet	Vertical Change	2.56"	5 ft	96	REF		

TOTAL COST FOR: NE *side of* **N M ST** *Starting at:* **6TH ST** **$106,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150942	N M ST	W YOSEMITE AVE	5TH ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53837	1.1 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
53838	10.4 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
53831	10.9 to 11.9 feet	**Vertical Change**	3.25"	5 ft	5	REF		
53832	33.9 to 34.9 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
53839	54.4 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,240**
53833	68.1 to 69.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
53858	91.2 to 115.3 feet	Key Note Segment		5 ft	121			
53840	117.0 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
53841	125.9 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
53842	130.8 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
53843	139.3 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
53844	144.9 to 145.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
53845	145.9 to 147.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
53834	162.0 to 163.0 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
53859	164.8 to 175.6 feet	Key Note Segment		5 ft	54			
53846	180.9 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
53847	184.3 to 185.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
53860	187.5 to 200.3 feet	Key Note Segment		5 ft	64			
53848	202.8 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
53849	210.5 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
53850	215.2 to 217.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53851	222.1 to 247.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
53852	248.1 to 251.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
53853	252.3 to 253.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
53854	254.6 to 256.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
53855	258.7 to 262.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
53856	264.3 to 280.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
53835	266.3 to 267.3 feet	**Vertical Change**	.41"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150942	N M ST	W YOSEMITE AVE	5TH ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53836	277.7 to 278.7 feet	Vertical Change	-.27"	5 ft	5	REF		
53857	282.7 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: NE *side of* **N M ST** *Starting at:* **W YOSEMITE AVE** **$74,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140849	N M ST	W YOSEMITE AVE	6TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52186	2.3 to 7.9 feet	Vertical Change	2.85"	5 ft	28	SF	$75	$2,100
52187	9.1 to 10.1 feet	Vertical Change	-.33"	5 ft	5	LF	$75	$375
52188	11.4 to 19.2 feet	Vertical Change	2.76"	5 ft	39	SF	$75	$2,925
52189	20.5 to 23.7 feet	Vertical Change	3.03"	5 ft	16	SF	$75	$1,200
52190	25.0 to 39.6 feet	Vertical Change	2.77"	5 ft	73	SF	$75	$5,475
52191	40.8 to 41.8 feet	Vertical Change	2.41"	5 ft	5	SF	$75	$375
52192	43.1 to 50.9 feet	Vertical Change	2.93"	5 ft	39	SF	$75	$2,925
52193	52.1 to 53.1 feet	Vertical Change	-1.54"	5 ft	5	SF	$75	$375
52212	53.9 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
52194	54.4 to 55.4 feet	Vertical Change	2.35"	5 ft	5	REF		
52195	56.6 to 59.9 feet	Vertical Change	2.92"	5 ft	17	REF		
52196	63.4 to 69.0 feet	Vertical Change	2.81"	5 ft	28	REF		
52213	69.3 to 70.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
52237	71.7 to 87.8 feet	Key Note Segment		5 ft	81			
52197	72.5 to 91.6 feet	Vertical Change	2.8"	5 ft	96	REF		
52214	87.8 to 96.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	45	SF	$40	$1,800
52198	92.9 to 96.2 feet	Vertical Change	3.09"	5 ft	17	REF		
52238	96.8 to 105.9 feet	Key Note Segment		5 ft	46			
52199	97.5 to 98.5 feet	Vertical Change	2.41"	5 ft	5	REF		
52200	99.7 to 123.2 feet	Vertical Change	2.96"	5 ft	118	REF		
52215	105.9 to 109.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	17	SF	$40	$680
52216	109.3 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
52217	119.2 to 123.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	$2,460
52218	123.3 to 124.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
52201	124.4 to 125.4 feet	Vertical Change	2.33"	5 ft	5	REF		
52219	124.4 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
52202	126.7 to 127.7 feet	Vertical Change	3.44"	5 ft	5	REF		
52203	129.0 to 130.0 feet	Vertical Change	2.65"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140849	N M ST	W YOSEMITE AVE	6TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52204	131.2 to 134.4 feet	Vertical Change	3"	5 ft	16	SF	$75	$1,200
52220	132.8 to 133.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
52205	135.7 to 138.9 feet	Vertical Change	2.52"	5 ft	16	SF	$75	$1,200
52206	140.2 to 145.8 feet	Vertical Change	2.9"	5 ft	28	SF	$75	$2,100
52221	141.5 to 146.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	$3,120
52207	147.1 to 148.1 feet	Vertical Change	2.47"	5 ft	5	REF		
52222	147.3 to 148.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
52208	149.3 to 159.3 feet	Vertical Change	2.88"	5 ft	50	REF		
52223	150.0 to 151.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
52224	155.4 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
52209	160.5 to 163.8 feet	Vertical Change	3.31"	5 ft	17	SF	$75	$1,238
52225	163.0 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
52210	165.0 to 220.2 feet	Vertical Change	2.94"	5 ft	276	REF		
52226	166.4 to 167.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
52239	167.8 to 177.3 feet	Key Note Segment		5 ft	48			
52227	177.3 to 182.4 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	26	SF	$40	$1,020
52240	182.4 to 191.7 feet	Key Note Segment		5 ft	47			
52228	191.9 to 195.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	20	SF	$40	$780
52229	195.8 to 212.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,840
52230	212.2 to 214.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	$1,200
52231	216.6 to 217.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
52211	221.2 to 287.9 feet	Vertical Change	3.21"	5 ft	333	SF	$75	$25,013
52232	245.3 to 246.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
52233	248.8 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
52234	257.1 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
52235	268.3 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
52236	283.9 to 288.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000

TOTAL COST FOR: SW *side of* **N M ST** *Starting at:* **W YOSEMITE AVE** **$107,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140916	N N ST	200 L ST	6TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52627	0.8 to 11.4 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	106	SF	$120	**$12,720**
52628	18.2 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	**$1,320**
52629	22.6 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	181	SF	$120	**$21,720**
52630	40.7 to 45.5 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	48	SF	$120	**$5,760**
52631	50.5 to 61.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	113	SF	$120	**$13,560**
52632	61.8 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	**$1,320**
52654	62.9 to 86.8 feet	Key Note Segment		10 ft	239			
52633	86.8 to 110.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	10 ft	241	SF	$40	**$9,640**
52634	111.2 to 119.4 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	82	SF	$120	**$9,840**
52635	119.9 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	76	SF	$120	**$9,120**
52636	127.5 to 138.4 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	109	SF	$120	**$13,080**
52612	135.9 to 136.9 feet	**Vertical Change**	-.27"	10 ft	10	REF		
52637	139.7 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	12	SF	$120	**$1,440**
52638	145.6 to 161.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	158	SF	$120	**$18,960**
52639	161.4 to 174.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	134	SF	$120	**$16,080**
52640	176.2 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	93	SF	$120	**$11,160**
52614	178.7 to 179.7 feet	**Vertical Change**	.28"	10 ft	10	REF		
52615	183.1 to 186.3 feet	**Vertical Change**	.26"	10 ft	32	REF		
52641	187.8 to 214.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	266	SF	$120	**$31,920**
52616	191.8 to 192.8 feet	**Vertical Change**	.28"	10 ft	10	REF		
52617	202.7 to 203.7 feet	**Vertical Change**	.53"	10 ft	10	REF		
52618	209.0 to 210.0 feet	**Vertical Change**	.3"	10 ft	10	REF		
52642	217.1 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	54	SF	$120	**$6,480**
52619	217.4 to 218.4 feet	**Vertical Change**	.36"	10 ft	10	REF		
52643	224.9 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	74	SF	$120	**$8,880**
52620	226.2 to 227.2 feet	**Vertical Change**	.27"	10 ft	10	REF		
52621	230.3 to 231.3 feet	**Vertical Change**	.27"	10 ft	10	REF		
52622	234.6 to 235.6 feet	**Vertical Change**	.31"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140916	N N ST	200 L ST	6TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52644	235.6 to 239.7 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	41	SF	$120	**$4,920**
52623	239.0 to 240.0 feet	**Vertical Change**	.28"	10 ft	10	REF		
52645	240.2 to 254.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	143	SF	$120	**$17,160**
52624	249.7 to 250.7 feet	**Vertical Change**	-.42"	10 ft	10	REF		
52625	254.0 to 255.0 feet	**Vertical Change**	.3"	10 ft	10	REF		
52646	259.3 to 285.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	259	SF	$120	**$31,080**
52647	288.4 to 289.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	14	SF	$120	**$1,680**
52648	290.0 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	77	SF	$120	**$9,240**
52649	297.7 to 310.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	132	SF	$120	**$15,840**
52650	312.5 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	100	SF	$120	**$12,000**
52626	313.2 to 314.2 feet	**Vertical Change**	-.31"	10 ft	10	REF		
52651	325.3 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	35	SF	$120	**$4,200**
52652	331.0 to 361.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	300	SF	$120	**$36,000**
52653	362.8 to 365.1 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: NE *side of* **N N ST** *Starting at:* **200 L ST** **$327,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150838	N N ST	4TH ST	5TH ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53518	22.7 to 23.7 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
53521	34.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
53522	46.3 to 52.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
53523	56.6 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
53524	68.6 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
53525	82.2 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
53526	87.3 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
53527	93.5 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
53519	99.3 to 100.3 feet	Vertical Change	.26"	5 ft	5	REF		
53528	99.3 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
53529	105.4 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	$13,080
53530	129.4 to 141.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,020
53531	145.1 to 149.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
53532	150.4 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
53533	160.5 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
53534	179.1 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
53535	182.3 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	$13,200
53541	204.3 to 222.1 feet	Key Note Segment		5 ft	89			
53536	223.3 to 241.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	$10,800
53537	241.3 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
53538	251.3 to 253.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	$1,200
53539	255.5 to 258.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
53540	260.6 to 282.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	$13,260
53520	266.5 to 267.5 feet	Vertical Change	1.75"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N N ST** *Starting at:* **4TH ST** **$102,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150835	N N ST	5TH ST	213 N N ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53501	0.8 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
53494	12.8 to 13.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
53495	28.5 to 29.5 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
53502	29.7 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
53496	35.8 to 36.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
53511	36.9 to 42.7 feet	Key Note Segment		5 ft	29			
53497	43.8 to 44.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
53503	47.7 to 49.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
53514	52.3 to 54.6 feet		5.0-6.0%	5 ft	12			
53515	52.3 to 54.6 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
53504	52.8 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
53516	55.0 to 56.1 feet		6.0-7.0%	5 ft	6			
53498	57.8 to 58.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
53499	74.0 to 75.0 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
53505	75.4 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
53506	91.3 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
53507	96.2 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,580**
53512	120.5 to 128.7 feet	Key Note Segment		5 ft	41			
53508	130.8 to 145.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
53509	146.2 to 152.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
53510	152.3 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
53500	163.1 to 164.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53513	177.5 to 178.5 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: NE *side of* **N N ST** *Starting at:* **5TH ST** **$60,414.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140854	N N ST	6TH ST	W YOSEMITE AVE	122

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52360	1.3 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
52307	1.5 to 2.5 feet	**Vertical Change**	3.5"	5 ft	5	REF		
52308	3.8 to 4.8 feet	**Vertical Change**	2.61"	5 ft	5	REF		
52309	6.0 to 7.0 feet	**Vertical Change**	3.55"	5 ft	5	SF	$75	**$375**
52310	8.3 to 9.3 feet	**Vertical Change**	3.07"	5 ft	5	SF	$75	**$375**
52311	10.6 to 16.1 feet	**Vertical Change**	3.47"	5 ft	28	SF	$75	**$2,063**
52312	17.1 to 18.1 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
52313	19.5 to 20.5 feet	**Vertical Change**	3.43"	5 ft	5	SF	$75	**$375**
52361	21.2 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
52314	21.8 to 25.1 feet	**Vertical Change**	2.51"	5 ft	17	REF		
52315	26.3 to 27.3 feet	**Vertical Change**	3.1"	5 ft	5	REF		
52316	28.6 to 29.6 feet	**Vertical Change**	2.62"	5 ft	5	REF		
52317	30.8 to 31.8 feet	**Vertical Change**	3.42"	5 ft	5	SF	$75	**$375**
52382	31.8 to 42.8 feet	Key Note Segment		5 ft	55			
52318	33.2 to 34.2 feet	**Vertical Change**	2.65"	5 ft	5	REF		
52319	35.4 to 40.9 feet	**Vertical Change**	3.51"	5 ft	28	REF		
52320	42.2 to 43.2 feet	**Vertical Change**	3.05"	5 ft	5	REF		
52321	44.4 to 45.4 feet	**Vertical Change**	3.5"	5 ft	5	SF	$75	**$375**
52322	46.8 to 54.5 feet	**Vertical Change**	2.77"	5 ft	39	SF	$75	**$2,888**
52323	55.7 to 61.2 feet	**Vertical Change**	3.48"	5 ft	28	SF	$75	**$2,063**
52324	62.4 to 63.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
52362	64.1 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
52325	64.8 to 70.4 feet	**Vertical Change**	2.68"	5 ft	28	REF		
52326	71.6 to 72.6 feet	**Vertical Change**	3.17"	5 ft	5	SF	$75	**$375**
52327	73.8 to 79.4 feet	**Vertical Change**	3.49"	5 ft	28	SF	$75	**$2,100**
52328	80.7 to 86.0 feet	**Vertical Change**	3.21"	5 ft	27	SF	$75	**$1,988**
52329	87.3 to 92.8 feet	**Vertical Change**	3.53"	5 ft	28	REF		
52363	88.2 to 91.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140854	N N ST	6TH ST	W YOSEMITE AVE	122

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52364	92.1 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
52330	94.1 to 101.9 feet	**Vertical Change**	3.24"	5 ft	39	REF		
52331	102.7 to 103.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
52332	105.3 to 110.9 feet	**Vertical Change**	3.5"	5 ft	28	SF	$75	**$2,100**
52365	110.6 to 112.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
52383	112.1 to 135.8 feet	Key Note Segment		5 ft	119			
52333	112.2 to 113.2 feet	**Vertical Change**	3.21"	5 ft	5	REF		
52335	116.7 to 117.7 feet	**Vertical Change**	2.93"	5 ft	5	REF		
52336	118.9 to 119.9 feet	**Vertical Change**	3.2"	5 ft	5	REF		
52337	121.2 to 126.7 feet	**Vertical Change**	3.51"	5 ft	28	REF		
52338	128.0 to 135.8 feet	**Vertical Change**	3.23"	5 ft	39	REF		
52366	135.8 to 156.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	102	SF	$40	**$4,080**
52339	137.1 to 144.8 feet	**Vertical Change**	2.96"	5 ft	39	REF		
52340	146.1 to 151.5 feet	**Vertical Change**	3.44"	5 ft	27	REF		
52341	152.8 to 153.8 feet	**Vertical Change**	2.98"	5 ft	5	REF		
52342	155.1 to 156.1 feet	**Vertical Change**	3.72"	5 ft	5	REF		
52343	157.3 to 162.8 feet	**Vertical Change**	2.82"	5 ft	28	SF	$75	**$2,063**
52385	158.6 to 159.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
52367	158.8 to 168.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,060**
52344	164.0 to 176.3 feet	**Vertical Change**	3.51"	5 ft	62	REF		
52368	172.0 to 185.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
52345	177.6 to 178.6 feet	**Vertical Change**	2.93"	5 ft	5	REF		
52346	179.9 to 183.1 feet	**Vertical Change**	3.26"	5 ft	16	REF		
52347	184.4 to 185.4 feet	**Vertical Change**	3.64"	5 ft	5	REF		
52369	186.4 to 187.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
52348	186.6 to 198.9 feet	**Vertical Change**	3.27"	5 ft	62	REF		
52384	187.8 to 211.1 feet	Key Note Segment		5 ft	117			
52349	200.2 to 201.2 feet	**Vertical Change**	2.73"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140854	N N ST	6TH ST	W YOSEMITE AVE	122

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52350	202.4 to 214.7 feet	Vertical Change	3.37"	5 ft	62	REF		
52370	211.9 to 218.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
52351	216.0 to 230.6 feet	Vertical Change	3.09"	5 ft	73	REF		
52371	219.6 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	$6,420
52352	231.5 to 232.5 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
52372	232.6 to 233.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
52353	234.0 to 237.3 feet	Vertical Change	3.17"	5 ft	17	REF		
52373	235.0 to 240.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	25	SF	$120	$3,000
52354	238.5 to 239.5 feet	Vertical Change	3.54"	5 ft	5	REF		
52374	240.0 to 241.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$840
52355	240.9 to 253.1 feet	Vertical Change	3.1"	5 ft	61	REF		
52375	242.3 to 243.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
52376	246.4 to 247.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
52377	252.3 to 253.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
52378	253.3 to 255.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
52356	254.3 to 266.6 feet	Vertical Change	3.48"	5 ft	62	REF		
52379	258.9 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
52357	268.0 to 269.0 feet	Vertical Change	3.07"	5 ft	5	SF	$75	$375
52380	269.9 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
52358	270.2 to 277.8 feet	Vertical Change	3.44"	5 ft	38	REF		
52359	279.1 to 280.1 feet	Vertical Change	3.15"	5 ft	5	REF		
52381	279.3 to 280.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780

TOTAL COST FOR: NE *side of* **N N ST** *Starting at:* **6TH ST** **$81,466.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140900	N N ST	6TH ST	7TH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52445	2.8 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
52428	11.6 to 21.7 feet	**Vertical Change**	3.47"	5 ft	51	SF	$75	**$3,788**
52446	14.0 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
52429	38.8 to 39.8 feet	**Vertical Change**	-3.99"	5 ft	5	SF	$75	**$375**
52430	41.0 to 42.0 feet	**Vertical Change**	3.47"	5 ft	5	SF	$75	**$375**
52431	45.5 to 46.5 feet	**Vertical Change**	3.27"	5 ft	5	SF	$75	**$375**
52432	47.8 to 48.8 feet	**Vertical Change**	3.53"	5 ft	5	REF		
52447	48.3 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
52448	53.9 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
52433	60.1 to 61.1 feet	**Vertical Change**	1.67"	5 ft	5	SF	$75	**$375**
52449	62.0 to 64.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
52463	65.4 to 80.3 feet	Key Note Segment		5 ft	74			
52434	65.6 to 125.5 feet	**Vertical Change**	3.51"	5 ft	300	REF		
52450	102.6 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52451	107.6 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
52452	109.3 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
52435	126.7 to 150.3 feet	**Vertical Change**	3.13"	5 ft	118	SF	$75	**$8,850**
52453	150.7 to 157.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
52436	153.8 to 168.4 feet	**Vertical Change**	3.16"	5 ft	73	REF		
52464	157.0 to 163.7 feet	Key Note Segment		5 ft	33			
52437	169.7 to 181.9 feet	**Vertical Change**	3.42"	5 ft	61	REF		
52454	170.2 to 171.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
52455	177.9 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
52438	183.2 to 225.0 feet	**Vertical Change**	3.13"	5 ft	209	REF		
52456	193.6 to 199.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
52457	199.6 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
52458	208.8 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
52439	225.9 to 226.9 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140900	N N ST	6TH ST	7TH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52440	228.5 to 274.8 feet	**Vertical Change**	3.35"	5 ft	232	SF	$75	**$17,363**
52459	237.8 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,460**
52460	260.8 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
52441	278.4 to 317.7 feet	**Vertical Change**	3.4"	5 ft	197	REF		
52465	284.6 to 292.5 feet	Key Note Segment		5 ft	39			
52461	302.1 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,820**
52442	318.9 to 319.9 feet	**Vertical Change**	3.68"	5 ft	5	REF		
52443	321.1 to 324.4 feet	**Vertical Change**	3.27"	5 ft	16	REF		
52444	325.6 to 340.3 feet	**Vertical Change**	3.58"	5 ft	73	REF		
52462	329.3 to 339.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: SW *side of* **N N ST** *Starting at:* **6TH ST** **$113,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140911	N N ST	7TH ST	OLIVE AVE	125

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52593	0.1 to 2.2 feet		8.0-9.0%	5 ft	11			
52594	2.2 to 3.3 feet		6.0-7.0%	5 ft	5			
52560	4.3 to 11.9 feet	Vertical Change	3.47"	5 ft	38	SF	$75	$2,850
52561	15.4 to 27.7 feet	Vertical Change	3.46"	5 ft	62	SF	$75	$4,613
52577	16.8 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
52578	24.1 to 32.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,220
52595	27.9 to 29.7 feet		5.0-6.0%	5 ft	9			
52562	28.8 to 29.8 feet	Vertical Change	4.61"	5 ft	5	REF		
52563	30.6 to 38.4 feet	Vertical Change	3.5"	5 ft	39	REF		
52579	33.6 to 37.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	18	SF	$120	$2,220
52596	33.6 to 36.0 feet		5.0-6.0%	5 ft	12			
52597	33.6 to 36.0 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	$1,440
52598	36.3 to 37.4 feet		6.0-7.0%	5 ft	6			
52564	39.6 to 40.6 feet	Vertical Change	4.34"	5 ft	5	REF		
52580	40.2 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
52581	41.3 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
52565	44.0 to 60.8 feet	Vertical Change	3.47"	5 ft	84	REF		
52582	53.4 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
52583	56.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
52566	61.5 to 62.5 feet	Vertical Change	-.38"	5 ft	5	REF		
52567	64.1 to 80.9 feet	Vertical Change	3.4"	5 ft	84	SF	$75	$6,300
52584	74.3 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
52568	86.7 to 101.2 feet	Vertical Change	3.48"	5 ft	73	SF	$75	$5,438
52585	98.4 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
52569	102.1 to 103.1 feet	Vertical Change	-2.27"	5 ft	5	SF	$75	$375
52586	106.5 to 109.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	16	SF	$120	$1,920
52570	106.6 to 107.6 feet	Vertical Change	-.68"	5 ft	5	REF		
52599	109.9 to 110.9 feet		11.0-12.0%	5 ft	5			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140911	N N ST	7TH ST	OLIVE AVE	125

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52592	114.3 to 121.9 feet	Key Note Segment		5 ft	38			
52587	121.9 to 123.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	$380
52588	124.5 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	$15,480
52572	134.8 to 135.8 feet	Vertical Change	-.3"	5 ft	5	REF		
52574	146.3 to 147.3 feet	Vertical Change	3.48"	5 ft	5	REF		
52575	150.9 to 151.9 feet	Vertical Change	2.68"	5 ft	5	SF	$75	$375
52589	152.5 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,660
52576	159.9 to 163.2 feet	Vertical Change	3.52"	5 ft	16	REF		
52590	173.6 to 188.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	$8,760
52591	190.0 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080

TOTAL COST FOR: NW *side of* **N N ST** *Starting at:* **7TH ST** **$83,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150932	N N ST	FIFTH ST	W YOSEMITE AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53762	3.6 to 4.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
53763	13.6 to 14.6 feet	Vertical Change	-.48"	5 ft	5	LF	$75	$375
53786	23.3 to 32.3 feet	Key Note Segment		5 ft	45			
53769	32.4 to 34.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
53770	60.1 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
53771	71.4 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,060
53787	82.3 to 91.2 feet	Key Note Segment		5 ft	45			
53772	92.8 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
53764	94.5 to 95.5 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
53773	101.3 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
53774	114.3 to 150.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	$21,780
53788	159.8 to 187.0 feet	Key Note Segment		5 ft	136			
53775	188.3 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
53776	189.8 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
53777	197.3 to 198.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
53778	201.2 to 205.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,760
53765	202.1 to 203.1 feet	Vertical Change	3.31"	5 ft	5	REF		
53779	206.7 to 207.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
53766	208.4 to 209.4 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
53780	212.9 to 214.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
53781	221.6 to 225.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
53782	227.7 to 229.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
53767	232.1 to 233.1 feet	Vertical Change	.39"	5 ft	5	REF		
53783	232.7 to 237.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,640
53768	236.7 to 237.7 feet	Vertical Change	-.44"	5 ft	5	REF		
53784	240.1 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
53785	266.4 to 270.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280

TOTAL COST FOR: SW *side of* **N N ST** *Starting at:* **FIFTH ST** **$59,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140913	N N ST	OLIVE AVE	SEVENTH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52600	1.3 to 14.4 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	131	SF	$120	**$15,720**
52601	31.5 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	128	SF	$120	**$15,360**
52611	57.8 to 82.0 feet	Key Note Segment		10 ft	242			
52602	85.2 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	106	SF	$120	**$12,720**
52603	163.8 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	76	SF	$120	**$9,120**
52604	173.9 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	**$1,680**
52605	179.1 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	52	SF	$120	**$6,240**
52606	194.1 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	48	SF	$120	**$5,760**
52607	204.6 to 209.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	48	SF	$120	**$5,760**
52608	221.1 to 223.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	25	SF	$120	**$3,000**
52609	232.2 to 235.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	**$4,080**
52610	271.2 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	33	SF	$120	**$3,960**

TOTAL COST FOR: NE *side of* **N N ST** *Starting at:* **OLIVE AVE** **$83,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150934	N N ST	W YOSEMITE AVE	5TH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53792	0.0 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
53793	36.5 to 51.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
53789	52.8 to 53.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
53794	56.3 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
53795	63.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
53802	72.2 to 96.8 feet	Key Note Segment		5 ft	123			
53796	101.4 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53797	117.3 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
53798	124.8 to 127.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
53799	129.7 to 139.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
53790	143.5 to 144.5 feet	**Vertical Change**	3.54"	5 ft	5	REF		
53800	144.3 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,540**
53791	183.7 to 184.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
53801	184.8 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**

TOTAL COST FOR: NE *side of* **N N ST** *Starting at:* **W YOSEMITE AVE** **$65,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140857	N N ST	W YOSEMITE AVE	6TH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52411	0.0 to 4.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
52386	2.1 to 16.8 feet	**Vertical Change**	3.45"	5 ft	74	REF		
52422	7.6 to 20.8 feet	Key Note Segment		5 ft	66			
52387	20.3 to 21.3 feet	**Vertical Change**	3.39"	5 ft	5	REF		
52412	21.3 to 29.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	43	SF	$40	**$1,700**
52388	22.6 to 23.6 feet	**Vertical Change**	4.13"	5 ft	5	REF		
52389	24.8 to 41.6 feet	**Vertical Change**	3.46"	5 ft	84	REF		
52413	30.2 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
52390	45.1 to 52.9 feet	**Vertical Change**	3.33"	5 ft	39	SF	$75	**$2,925**
52391	56.5 to 57.5 feet	**Vertical Change**	3.58"	5 ft	5	SF	$75	**$375**
52392	61.0 to 64.3 feet	**Vertical Change**	3.39"	5 ft	17	SF	$75	**$1,238**
52414	64.9 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
52393	67.8 to 80.2 feet	**Vertical Change**	3.48"	5 ft	62	REF		
52394	83.7 to 84.7 feet	**Vertical Change**	3.51"	5 ft	5	SF	$75	**$375**
52415	90.2 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
52423	98.8 to 114.5 feet	Key Note Segment		5 ft	79			
52395	99.6 to 100.6 feet	**Vertical Change**	3.48"	5 ft	5	REF		
52396	113.2 to 114.2 feet	**Vertical Change**	3.47"	5 ft	5	REF		
52416	115.7 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
52397	117.7 to 123.3 feet	**Vertical Change**	3.46"	5 ft	28	REF		
52398	142.7 to 143.7 feet	**Vertical Change**	3.54"	5 ft	5	SF	$75	**$375**
52424	144.9 to 164.8 feet	Key Note Segment		5 ft	100			
52399	146.3 to 147.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
52400	172.0 to 177.5 feet	**Vertical Change**	3.46"	5 ft	28	SF	$75	**$2,063**
52401	181.0 to 182.0 feet	**Vertical Change**	3.43"	5 ft	5	SF	$75	**$375**
52402	183.0 to 184.0 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
52417	187.6 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
52425	190.9 to 200.8 feet	Key Note Segment		5 ft	50			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140857	N N ST	W YOSEMITE AVE	6TH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52403	196.9 to 200.2 feet	Vertical Change	3.47"	5 ft	17	REF		
52418	201.2 to 205.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	21	SF	$40	$820
52404	203.7 to 225.1 feet	Vertical Change	3.51"	5 ft	107	REF		
52419	211.0 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
52426	217.3 to 227.0 feet	Key Note Segment		5 ft	49			
52405	228.7 to 236.5 feet	Vertical Change	3.52"	5 ft	39	REF		
52420	229.2 to 250.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	$12,600
52406	240.1 to 243.3 feet	Vertical Change	3.5"	5 ft	16	REF		
52407	249.1 to 252.4 feet	Vertical Change	3.48"	5 ft	17	REF		
52427	251.3 to 276.3 feet	Key Note Segment		5 ft	125			
52408	255.9 to 266.0 feet	Vertical Change	3.5"	5 ft	51	REF		
52409	269.5 to 279.6 feet	Vertical Change	3.48"	5 ft	51	REF		
52421	281.8 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
52410	283.2 to 291.0 feet	Vertical Change	3.57"	5 ft	39	REF		

TOTAL COST FOR: SW *side of* **N N ST** *Starting at:* **W YOSEMITE AVE** **$56,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150928	N O ST	119 N O ST	5TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53747	4.8 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
53758	7.7 to 34.5 feet	Key Note Segment		5 ft	134			
53748	34.5 to 37.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
53749	44.0 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
53750	58.6 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
53759	75.7 to 87.4 feet	Key Note Segment		5 ft	59			
53743	77.3 to 78.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
53751	87.4 to 112.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	127	SF	$40	**$5,080**
53752	113.0 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
53760	122.9 to 135.7 feet	Key Note Segment		5 ft	64			
53753	136.3 to 137.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
53744	137.0 to 138.0 feet	**Vertical Change**	.73"	5 ft	5	REF		
53754	140.2 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
53761	146.4 to 159.8 feet	Key Note Segment		5 ft	67			
53745	160.3 to 161.3 feet	**Vertical Change**	-.57"	5 ft	5	REF		
53755	166.3 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
53756	181.5 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
53746	185.7 to 186.7 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
53757	193.3 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: NE *side of* **N O ST** *Starting at:* **119 N O ST** **$34,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2107140938	N O ST	224 O ST	OLIVE AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52809	15.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
52810	28.8 to 37.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
52815	37.0 to 45.3 feet	Key Note Segment		5 ft	42			
52811	45.3 to 51.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,220**
52812	57.0 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
52813	68.4 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
52814	74.6 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
52816	77.0 to 78.1 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: NW *side of* **N O ST** *Starting at:* **224 O ST** **$22,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150846	N O ST	4TH ST	200 N O ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53606	0.0 to 1.1 feet		6.0-7.0%	5 ft	6			
53595	8.1 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
53596	12.5 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
53597	22.4 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
53598	45.4 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
53604	74.3 to 81.9 feet	Key Note Segment		5 ft	38			
53589	136.9 to 137.9 feet	**Vertical Change**	-.91"	5 ft	5	SF	$75	**$375**
53599	138.3 to 152.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
53600	157.9 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
53590	171.3 to 172.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
53601	178.9 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
53591	192.1 to 193.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
53592	199.4 to 200.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
53602	199.6 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53603	207.3 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
53593	208.2 to 209.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
53605	229.3 to 238.1 feet	Key Note Segment		5 ft	44			

TOTAL COST FOR: SW *side of* **N O ST** *Starting at:* **4TH ST** **$52,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150843	N O ST	5TH ST	FOURTH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53569	0.0 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
53563	20.2 to 21.2 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
53564	25.4 to 26.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
53565	30.8 to 31.8 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
53570	51.8 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53571	54.0 to 75.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
53584	76.6 to 87.9 feet	Key Note Segment		5 ft	57			
53572	87.9 to 111.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	116	SF	$40	**$4,640**
53566	102.0 to 103.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
53573	117.1 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
53567	160.2 to 161.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
53585	163.9 to 173.4 feet	Key Note Segment		5 ft	48			
53574	198.8 to 203.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
53575	206.3 to 219.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
53576	220.1 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
53577	223.5 to 227.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
53578	227.6 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
53586	232.3 to 241.2 feet	Key Note Segment		5 ft	45			
53579	243.6 to 245.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
53580	245.4 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
53587	253.0 to 262.3 feet	Key Note Segment		5 ft	47			
53581	263.4 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
53582	268.7 to 275.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$4,020**
53583	277.5 to 279.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
53588	279.3 to 281.0 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: NE *side of* **N O ST** *Starting at:* **5TH ST** **$59,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140922	N O ST	6TH ST	W YOSEMITE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52689	5.2 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
52678	7.8 to 8.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
52679	16.6 to 17.6 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
52690	21.2 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
52680	42.3 to 43.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
52691	42.3 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
52681	57.9 to 58.9 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
52699	60.1 to 67.3 feet	Key Note Segment		5 ft	36			
52692	74.2 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
52693	80.5 to 85.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
52682	85.4 to 86.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
52700	85.9 to 99.3 feet	Key Note Segment		5 ft	67			
52694	99.8 to 102.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
52695	102.5 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
52683	106.7 to 107.7 feet	**Vertical Change**	.82"	5 ft	5	SF	$75	**$375**
52696	108.7 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
52684	117.7 to 118.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
52697	122.2 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	228	SF	$120	**$27,300**
52698	169.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
52685	190.7 to 191.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
52686	193.1 to 194.1 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
52701	194.6 to 204.6 feet	Key Note Segment		5 ft	50			
52687	199.9 to 200.9 feet	**Vertical Change**	-.42"	5 ft	5	REF		
52688	243.5 to 244.5 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **N O ST** *Starting at:* **6TH ST** **$64,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140933	N O ST	6TH ST	204 O ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52793	2.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
52794	6.3 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
52790	18.1 to 19.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
52791	39.5 to 40.5 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
52797	41.8 to 56.9 feet	Key Note Segment		5 ft	76			
52792	59.0 to 60.0 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
52795	63.2 to 64.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52796	85.1 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: SW *side of* **N O ST** *Starting at:* **6TH ST** **$13,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150925	N O ST	FIFTH ST	W YOSEMITE AVE	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53724	0.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
53725	24.5 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
53713	33.5 to 34.5 feet	**Vertical Change**	2.74"	5 ft	5	REF		
53726	33.8 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
53727	42.2 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
53728	51.5 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
53739	91.5 to 104.7 feet	Key Note Segment		5 ft	66			
53714	97.7 to 98.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
53742	104.9 to 106.1 feet		5.0-6.0%	5 ft	6			
53715	110.3 to 111.3 feet	**Vertical Change**	-.9"	5 ft	5	SF	$75	**$375**
53716	118.9 to 119.9 feet	**Vertical Change**	1.15"	5 ft	5	SF	$75	**$375**
53729	130.3 to 134.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
53717	145.2 to 146.2 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
53740	155.8 to 161.3 feet	Key Note Segment		5 ft	28			
53730	162.4 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
53741	165.0 to 193.2 feet	Key Note Segment		5 ft	141			
53718	192.3 to 193.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
53731	194.3 to 206.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
53732	208.3 to 222.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
53719	215.4 to 216.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
53733	226.1 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
53734	232.1 to 233.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
53735	234.7 to 240.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
53736	243.1 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
53721	248.1 to 249.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
53737	264.7 to 272.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
53722	269.3 to 270.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
53738	277.5 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150925	N O ST	FIFTH ST	W YOSEMITE AVE	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53723	277.9 to 278.9 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **N O ST** *Starting at:* **FIFTH ST** **$84,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140940	N O ST	SEVENTH ST	209 O ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52817	11.6 to 12.6 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
52831	16.0 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
52818	26.4 to 27.4 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
52819	32.9 to 33.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
52832	37.3 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
52833	49.8 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
52820	54.9 to 55.9 feet	Vertical Change	-.3"	5 ft	5	REF		
52844	60.8 to 73.9 feet	Key Note Segment		5 ft	66			
52821	65.3 to 66.3 feet	Vertical Change	.29"	5 ft	5	REF		
52834	75.2 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
52845	82.8 to 90.9 feet	Key Note Segment		5 ft	41			
52822	84.7 to 85.7 feet	Vertical Change	-.27"	5 ft	5	REF		
52835	92.3 to 113.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	$12,600
52836	115.7 to 116.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
52837	119.1 to 121.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
52838	121.3 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
52824	121.7 to 122.7 feet	Vertical Change	.34"	5 ft	5	REF		
52825	128.2 to 129.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
52846	153.6 to 161.0 feet	Key Note Segment		5 ft	37			
52826	164.7 to 165.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
52839	188.9 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
52827	196.7 to 197.7 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
52840	209.4 to 221.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
52841	225.2 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
52828	233.3 to 234.3 feet	Vertical Change	1.31"	5 ft	5	REF		
52842	234.3 to 238.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
52829	237.5 to 238.5 feet	Vertical Change	2.9"	5 ft	5	REF		
52847	238.2 to 247.4 feet	Key Note Segment		5 ft	46			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107140940	N O ST	SEVENTH ST	209 O ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52830	240.1 to 241.1 feet	Vertical Change	-.31"	5 ft	5	REF		
52843	247.4 to 248.5 feet	Cross Slope (Driveway)	14.0-15.0%	5 ft	6	SF	$40	$220
52848	247.4 to 248.5 feet		9.0-10.0%	5 ft	6			

TOTAL COST FOR: NE *side of* **N O ST** *Starting at:* **SEVENTH ST** **$51,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140924	N O ST	W YOSEMITE AVE	6TH ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52710	0.0 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
52711	5.2 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
52712	17.5 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
52713	21.6 to 30.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
52714	52.8 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
52730	60.2 to 74.6 feet	Key Note Segment		5 ft	72			
52715	75.3 to 82.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	36	SF	$40	**$1,440**
52702	75.5 to 76.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
52716	84.5 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
52717	102.7 to 110.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
52718	113.3 to 115.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
52703	116.4 to 117.4 feet	**Vertical Change**	.77"	5 ft	5	REF		
52719	116.6 to 118.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
52720	122.8 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
52721	133.9 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
52722	148.8 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
52731	164.5 to 178.5 feet	Key Note Segment		5 ft	70			
52723	179.3 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52732	201.5 to 216.3 feet	Key Note Segment		5 ft	74			
52724	222.7 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
52733	224.9 to 251.5 feet	Key Note Segment		5 ft	133			
52704	246.9 to 247.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
52705	252.3 to 253.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
52734	256.5 to 258.5 feet		6.0-7.0%	5 ft	10			
52725	257.0 to 258.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
52706	257.2 to 258.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
52726	264.6 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
52707	269.3 to 270.3 feet	**Vertical Change**	-.82"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140924	N O ST	W YOSEMITE AVE	6TH ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52727	271.5 to 272.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
52708	276.6 to 277.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
52728	278.3 to 279.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
52729	280.4 to 281.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
52709	280.6 to 281.6 feet	**Vertical Change**	-.41"	5 ft	5	REF		
52735	285.8 to 288.4 feet		7.0-8.0%	5 ft	13			
52736	285.8 to 288.4 feet	Running Slope	7.0-8.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: SW *side of* **N O ST** *Starting at:* **W YOSEMITE AVE** **$57,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150851	N P ST	219 N P ST	4TH ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53616	0.8 to 6.7 feet	Key Note Segment		5 ft	30			
53611	9.5 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
53612	27.4 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
53607	30.7 to 31.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
53608	39.9 to 40.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
53613	60.4 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
53609	60.7 to 61.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
53617	66.9 to 80.7 feet	Key Note Segment		5 ft	69			
53610	68.5 to 69.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
53614	80.7 to 88.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,500**
53615	90.9 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
53618	95.3 to 98.3 feet		5.0-6.0%	5 ft	15			

TOTAL COST FOR: NE *side of* **N P ST** *Starting at:* **219 N P ST** **$38,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150914	N P ST	5TH ST	W YOSEMITE AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53694	37.7 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
53703	52.3 to 81.1 feet	Key Note Segment		5 ft	144			
53695	90.0 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
53696	103.6 to 112.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
53697	114.8 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
53698	193.4 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
53693	218.2 to 219.2 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
53699	225.4 to 226.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
53700	230.2 to 231.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
53701	238.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
53702	259.1 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**

TOTAL COST FOR: SW *side of* **N P ST** *Starting at:* **5TH ST** **$67,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150919	N P ST	W YOSEMITE AVE	107 N P ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53706	0.4 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
53707	20.6 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
53708	37.7 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
53709	66.9 to 81.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
53712	82.1 to 103.6 feet	Key Note Segment		5 ft	108			
53710	105.8 to 113.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
53704	110.5 to 111.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
53711	120.3 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
53705	122.9 to 123.9 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N P ST** *Starting at:* **W YOSEMITE AVE** **$42,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251451	N PARK DR	155 N PARK DR	153 N PARK DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108698	1.0 to 7.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
108699	7.3 to 11.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108692	13.7 to 14.7 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
108700	15.9 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
108693	16.5 to 20.5 feet	**Vertical Change**	-.63"	5 ft	20	REF		
108701	23.2 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
108694	37.9 to 38.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		
108705	40.9 to 57.9 feet	Key Note Segment		5 ft	85			
108707	57.9 to 58.9 feet		8.0-9.0%	5 ft	5			
108695	58.1 to 59.1 feet	**Vertical Change**	.54"	5 ft	5	REF		
108696	61.3 to 62.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
108702	61.7 to 67.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
108706	69.4 to 83.3 feet	Key Note Segment		5 ft	69			
108697	82.8 to 83.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
108703	84.8 to 88.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
108704	88.8 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: N *side of* **N PARK DR** *Starting at:* **155 N PARK DR** **$29,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150905	N Q ST	108 N Q ST	W YOSEMITE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53647	9.4 to 10.4 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
53651	12.8 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
53652	24.1 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
53653	37.3 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
53648	47.0 to 48.0 feet	Vertical Change	-.29"	5 ft	5	REF		
53654	47.6 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
53649	49.6 to 50.6 feet	Vertical Change	.39"	5 ft	5	REF		
53655	55.2 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
53658	56.8 to 86.4 feet	Key Note Segment		5 ft	148			
53656	87.2 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
53657	93.5 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560

TOTAL COST FOR: SW *side of* **N Q ST** *Starting at:* **108 N Q ST** **$22,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150909	N Q ST	131 N Q ST	5TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53671	0.0 to 1.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
53672	1.0 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
53676	12.8 to 35.0 feet	Key Note Segment		5 ft	111			
53666	37.0 to 38.0 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
53673	40.4 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
53667	42.9 to 43.9 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
53674	47.0 to 48.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
53675	49.2 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
53668	60.0 to 61.0 feet	**Vertical Change**	-.67"	5 ft	5	SF	$75	**$375**
53669	68.6 to 69.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
53670	85.9 to 86.9 feet	**Vertical Change**	-.88"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **N Q ST** *Starting at:* **131 N Q ST** **$16,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191005	N Q ST	223 N Q ST	FOURTH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38644	0.2 to 11.9 feet	Key Note Segment		5 ft	59			
38642	13.2 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
38643	34.3 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38641	37.3 to 38.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N Q ST** *Starting at:* **223 N Q ST** **$2,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107150902	N Q ST	5TH ST	1210 N Q ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53643	2.2 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
53644	10.5 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
53645	22.7 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
53646	31.9 to 33.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: SW *side of* **N Q ST** *Starting at:* **5TH ST** **$10,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2107150907	N Q ST	W YOSEMITE AVE	111 N Q ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53660	6.3 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
53661	38.5 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
53662	44.8 to 57.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
53663	57.8 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
53664	64.9 to 80.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,540**
53665	80.9 to 100.6 feet	Key Note Segment		5 ft	98			
53659	81.6 to 82.6 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **N Q ST** *Starting at:* **W YOSEMITE AVE** **$41,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041458	N SCHNOOR AVE	1595 ARBELLA LN	DUTRA WAY	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121914	2.6 to 6.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
121890	3.1 to 4.1 feet	**Vertical Change**	3.52"	5 ft	5	REF		
121915	6.9 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
121916	27.2 to 34.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
121891	28.1 to 29.1 feet	**Vertical Change**	3.58"	5 ft	5	REF		
121892	30.6 to 31.6 feet	**Vertical Change**	1.67"	5 ft	5	REF		
121917	36.6 to 43.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
121918	45.9 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	194	SF	$120	**$23,220**
121893	51.1 to 52.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
121894	62.9 to 63.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
121895	75.8 to 76.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
121919	86.7 to 106.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
121896	92.9 to 93.9 feet	**Vertical Change**	.57"	5 ft	5	REF		
121920	106.5 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
121921	135.3 to 144.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,340**
121922	146.5 to 188.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	209	SF	$120	**$25,080**
121897	153.9 to 154.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
121923	192.5 to 194.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
121898	193.4 to 194.4 feet	**Vertical Change**	2.6"	5 ft	5	REF		
121924	194.0 to 195.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
121925	195.8 to 198.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
121926	201.2 to 219.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
121927	220.3 to 221.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121928	232.3 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
121899	234.7 to 235.7 feet	**Vertical Change**	.54"	5 ft	5	REF		
121929	259.8 to 283.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
121900	266.5 to 267.5 feet	**Vertical Change**	2.43"	5 ft	5	REF		
121901	269.9 to 270.9 feet	**Vertical Change**	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041458	N SCHNOOR AVE	1595 ARBELLA LN	DUTRA WAY	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121930	285.8 to 313.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,620**
121902	296.9 to 297.9 feet	**Vertical Change**	2.29"	5 ft	5	REF		
121931	315.2 to 317.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,620**
121903	315.5 to 316.5 feet	**Vertical Change**	-.79"	5 ft	5	REF		
121932	319.0 to 323.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	22	SF	$120	**$2,640**
121933	324.5 to 325.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
121934	326.5 to 339.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
121935	346.5 to 347.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
121936	348.1 to 373.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
121937	375.8 to 414.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	192	SF	$120	**$22,980**
121938	415.8 to 426.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
121904	422.8 to 423.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
121905	425.4 to 426.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
121939	427.1 to 428.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
121940	430.8 to 450.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,060**
121906	436.5 to 437.5 feet	**Vertical Change**	2.38"	5 ft	5	REF		
121941	450.9 to 452.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
121942	472.1 to 490.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
121943	494.3 to 505.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
121907	495.1 to 496.1 feet	**Vertical Change**	2.97"	5 ft	5	REF		
121944	507.5 to 512.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
121945	515.4 to 534.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
121908	520.2 to 521.2 feet	**Vertical Change**	.7"	5 ft	5	REF		
121946	538.8 to 542.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
121947	546.3 to 555.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
121909	552.1 to 553.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
121910	554.0 to 555.0 feet	**Vertical Change**	1"	5 ft	5	REF		
121948	555.8 to 591.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041458	N SCHNOOR AVE	1595 ARBELLA LN	DUTRA WAY	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121949	594.7 to 618.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,340**
121950	618.9 to 659.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	202	SF	$120	**$24,180**
121951	661.8 to 668.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
121911	670.3 to 671.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
121952	670.8 to 674.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
121953	676.3 to 678.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
121954	680.3 to 684.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
121955	686.3 to 688.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
121912	688.7 to 689.7 feet	**Vertical Change**	.58"	5 ft	5	REF		
121956	691.1 to 701.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
121957	705.5 to 719.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
121958	719.5 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
121913	721.7 to 722.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
121959	747.0 to 754.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
121960	755.2 to 786.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,600**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **1595 ARBELLA LN** **$402,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041507	N SCHNOOR AVE	1663 N SCHNOOR AVE	2220 N SCHNOOR AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122025	0.9 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
122018	4.2 to 5.2 feet	**Vertical Change**	1.07"	5 ft	5	SF	$75	**$375**
122026	7.7 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
122027	19.1 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
122028	32.3 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
122029	46.6 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
122019	91.3 to 92.3 feet	**Vertical Change**	-.53"	5 ft	5	SF	$75	**$375**
122037	91.7 to 117.3 feet	Key Note Segment		5 ft	128			
122030	117.7 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
122020	121.6 to 122.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
122021	138.6 to 139.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
122022	140.3 to 141.3 feet	**Vertical Change**	-1.09"	5 ft	5	SF	$75	**$375**
122031	143.4 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
122032	173.9 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
122033	195.7 to 197.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
122023	199.2 to 200.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
122034	201.1 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
122035	204.6 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
122036	221.7 to 227.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
122024	222.3 to 223.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **1663 N SCHNOOR AVE** **$73,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041423	N SCHNOOR AVE	2000 N SCHNOOR AVE	IRONWOOD WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121725	2.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
121720	4.0 to 5.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
121726	8.8 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,980**
121721	17.4 to 18.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
121722	20.6 to 21.6 feet	**Vertical Change**	.85"	5 ft	5	REF		
121723	30.3 to 31.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
121727	37.6 to 57.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
121724	43.3 to 44.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
121728	57.9 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
121729	68.4 to 84.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,900**
121730	86.0 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2000 N SCHNOOR AVE** **$52,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041406	N SCHNOOR AVE	2155 N SCHNOOR AVE	2155 N SCHNOOR AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121601	0.2 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
121602	21.4 to 63.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	208	SF	$120	**$24,960**
121603	65.5 to 80.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
121604	83.3 to 96.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
121605	97.1 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
121600	100.7 to 101.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **2155 N SCHNOOR AVE** **$59,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041409	N SCHNOOR AVE	2155 N SCHNOOR AVE	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121616	2.1 to 3.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
121617	7.0 to 14.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
121618	14.1 to 16.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
121619	16.3 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
121620	44.1 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,720**
121621	85.3 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121622	90.6 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
121623	109.5 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
121624	124.3 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
121625	143.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
121626	153.2 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
121627	174.0 to 190.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
121606	176.4 to 177.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
121628	192.7 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
121607	193.5 to 194.5 feet	**Vertical Change**	.9"	5 ft	5	REF		
121629	198.0 to 200.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
121608	205.8 to 206.8 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
121630	212.0 to 213.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
121631	229.5 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
121609	230.8 to 231.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
121632	240.2 to 246.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
121633	252.3 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
121634	258.6 to 268.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
121635	279.7 to 286.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
121636	288.3 to 296.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
121637	299.4 to 303.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
121638	323.1 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121639	341.0 to 348.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041409	N SCHNOOR AVE	2155 N SCHNOOR AVE	KENNEDY ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121640	356.9 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
121610	365.0 to 366.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
121611	377.0 to 378.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
121641	377.0 to 378.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121644	389.2 to 412.9 feet	Key Note Segment		5 ft	119			
121612	390.8 to 391.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
121642	413.2 to 422.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	44	SF	$40	**$1,760**
121643	422.0 to 439.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
121613	426.9 to 427.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
121614	431.1 to 432.1 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **2155 N SCHNOOR AVE** **$131,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041417	N SCHNOOR AVE	2160 N SCHNOOR AVE	2160 N SCHNOOR AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121697	0.0 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
121698	8.8 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121699	24.2 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2160 N SCHNOOR AVE** **$5,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041416	N SCHNOOR AVE	2190 N SCHNOOR AVE	2190 N SCHNOOR AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121674	2.3 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
121675	17.9 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
121671	29.8 to 30.8 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
121676	31.5 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121677	35.5 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
121678	46.4 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
121679	64.8 to 74.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
121680	76.4 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
121681	83.4 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
121682	97.0 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,080**
121672	115.6 to 116.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
121683	133.0 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121684	134.8 to 135.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
121685	138.3 to 140.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
121686	140.1 to 141.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
121687	142.5 to 152.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,820**
121688	154.3 to 169.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
121689	169.1 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
121690	185.2 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
121691	193.8 to 201.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
121692	206.8 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
121693	219.4 to 225.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
121694	226.5 to 228.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
121695	228.8 to 231.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
121673	229.7 to 230.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
121696	233.7 to 235.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2190 N SCHNOOR AVE** **$105,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041414	N SCHNOOR AVE	2210 N SCHNOOR AVE	2210 N SCHNOOR AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121662	7.6 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
121663	10.8 to 36.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
121664	36.8 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
121665	50.1 to 83.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	169	SF	$120	**$20,280**
121666	84.8 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
121667	90.9 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
121668	96.1 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
121669	104.7 to 113.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
121670	113.3 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
121660	122.4 to 123.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
121661	131.4 to 132.4 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2210 N SCHNOOR AVE** **$67,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041247	N SCHNOOR AVE	2263 N SCHNOOR AVE	2263 N SCHNOOR AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121497	1.8 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
121498	9.9 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
121499	19.6 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	219	SF	$120	**$26,280**
121491	61.1 to 62.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
121500	70.7 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
121492	78.0 to 79.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
121501	90.8 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
121502	101.2 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,500**
121493	128.6 to 129.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
121503	136.8 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,380**
121494	155.9 to 156.9 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
121504	159.4 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
121505	181.1 to 188.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
121506	189.3 to 193.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
121507	193.4 to 195.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
121508	197.3 to 212.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
121509	212.6 to 224.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,080**
121510	224.9 to 228.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
121511	230.8 to 240.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
121495	232.1 to 233.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
121512	243.0 to 255.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
121513	258.5 to 264.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
121496	264.1 to 265.1 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **2263 N SCHNOOR AVE** **$123,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041509	N SCHNOOR AVE	2290 W CLEVELAND AVE	W CLEVELAND AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122042	1.7 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,140**
122038	32.1 to 33.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
122043	33.8 to 37.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
122039	38.6 to 39.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
122044	40.3 to 51.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
122040	47.2 to 48.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
122045	56.7 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
122046	63.3 to 64.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
122047	64.4 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
122048	78.7 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
122041	87.7 to 88.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
122049	96.8 to 109.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
122050	111.8 to 114.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
122051	114.7 to 121.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
122052	121.9 to 143.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
122053	143.3 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **2290 W CLEVELAND AVE** **$76,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041248	N SCHNOOR AVE	2295 N SCHNOOR AVE	2295 N SCHNOOR AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121516	11.3 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,100**
121514	30.8 to 31.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
121517	43.7 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121518	49.1 to 58.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
121519	59.3 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
121520	72.3 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
121521	93.0 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
121522	113.5 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
121515	114.5 to 115.5 feet	**Vertical Change**	.68"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **2295 N SCHNOOR AVE** **$50,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041441	N SCHNOOR AVE	2330 N SCHNOOR AVE	2330 N SCHNOOR AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121871	1.5 to 5.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
121872	6.0 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
121867	6.5 to 7.5 feet	**Vertical Change**	-.41"	5 ft	5	REF		
121873	7.0 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
121868	16.4 to 17.4 feet	**Vertical Change**	-.5"	5 ft	5	REF		
121874	19.4 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
121875	29.3 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
121876	40.4 to 45.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
121877	45.6 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,480**
121869	51.8 to 52.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
121878	90.7 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
121870	91.0 to 92.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2330 N SCHNOOR AVE** **$51,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041442	N SCHNOOR AVE	2330 N SCHNOOR AVE	2330 N SCHNOOR AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121883	0.0 to 3.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
121884	3.3 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
121885	24.7 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
121879	37.6 to 38.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
121886	43.0 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
121880	51.4 to 52.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
121881	56.1 to 57.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
121887	68.5 to 69.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
121888	72.5 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,920**
121889	110.8 to 115.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
121882	115.5 to 116.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **2330 N SCHNOOR AVE** **$61,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131403	N SCHNOOR AVE	829 N SCHNOOR AVE	UNIVERSITY AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98088	0.0 to 2.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
98104	6.8 to 31.2 feet	Key Note Segment		5 ft	122			
98089	31.6 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
98090	37.3 to 40.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
98091	44.8 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
98092	51.2 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
98083	56.0 to 57.0 feet	**Vertical Change**	3.61"	5 ft	5	REF		
98084	59.3 to 62.4 feet	**Vertical Change**	-.33"	5 ft	16	LF	$75	**$1,163**
98093	63.9 to 76.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
98085	65.6 to 66.6 feet	**Vertical Change**	.62"	5 ft	5	REF		
98086	69.6 to 70.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
98094	77.8 to 78.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
98095	81.0 to 89.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
98096	92.6 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
98097	104.8 to 106.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
98098	109.3 to 112.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
98099	114.5 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
98100	125.4 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
98101	133.3 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
98102	149.2 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
98103	163.8 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
98105	164.3 to 165.7 feet		6.0-7.0%	5 ft	7			
98087	165.9 to 166.9 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **829 N SCHNOOR AVE** **$59,137.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041433	N SCHNOOR AVE	ALDERWOOD CT	BEECHWOOD WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121808	0.0 to 15.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
121805	1.1 to 2.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
121809	19.0 to 42.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,280**
121810	48.6 to 68.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
121811	70.9 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
121812	84.8 to 89.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
121813	89.3 to 141.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	263	SF	$120	**$31,560**
121806	139.9 to 140.9 feet	**Vertical Change**	.5"	5 ft	5	REF		
121814	143.0 to 170.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
121807	146.5 to 147.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
121815	171.8 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **ALDERWOOD CT** **$100,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041437	N SCHNOOR AVE	BEECHWOOD WAY	W CLEVELAND AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121816	3.5 to 4.5 feet	Vertical Change	-.51"	5 ft	5	SF	$75	$375
121817	15.3 to 16.3 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
121832	18.2 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
121818	21.8 to 22.8 feet	Vertical Change	-.59"	5 ft	5	REF		
121833	25.3 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
121834	48.1 to 54.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
121819	48.2 to 49.2 feet	Vertical Change	.26"	5 ft	5	REF		
121835	74.4 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
121820	84.0 to 85.0 feet	Vertical Change	1.01"	5 ft	5	SF	$75	$375
121836	85.7 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
121837	91.0 to 94.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
121838	97.6 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
121854	104.4 to 127.2 feet	Key Note Segment		5 ft	114			
121821	105.0 to 106.0 feet	Vertical Change	-.32"	5 ft	5	REF		
121822	116.6 to 117.6 feet	Vertical Change	.35"	5 ft	5	REF		
121823	122.0 to 123.0 feet	Vertical Change	-.34"	5 ft	5	REF		
121824	124.6 to 125.6 feet	Vertical Change	1.04"	5 ft	5	REF		
121825	126.3 to 127.3 feet	Vertical Change	1.72"	5 ft	5	REF		
121839	127.2 to 132.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,080
121840	134.3 to 141.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,260
121826	142.4 to 143.4 feet	Vertical Change	-.46"	5 ft	5	LF	$75	$375
121841	144.0 to 145.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
121842	150.8 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,780
121827	167.4 to 168.4 feet	Vertical Change	1.45"	5 ft	5	SF	$75	$375
121828	177.3 to 178.3 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
121843	186.6 to 189.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
121844	193.3 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	$14,040
121845	217.3 to 220.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041437	N SCHNOOR AVE	BEECHWOOD WAY	W CLEVELAND AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121846	221.7 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
121829	222.4 to 223.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
121830	236.1 to 237.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
121847	241.3 to 251.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
121848	253.5 to 255.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
121849	257.9 to 258.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
121850	261.6 to 304.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	213	SF	$120	**$25,620**
121831	304.0 to 305.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
121851	304.8 to 306.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
121852	306.0 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
121853	318.4 to 330.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **BEECHWOOD WAY** **$111,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041504	N SCHNOOR AVE	DUTRA WAY	1643 N SCHNOOR AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121980	0.7 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
121961	16.9 to 17.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
121981	18.8 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
121982	28.4 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
121983	34.2 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
121984	43.9 to 45.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
121985	45.6 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
121962	58.4 to 59.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
121986	64.3 to 72.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
121963	68.7 to 69.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
121987	72.0 to 101.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
121988	108.9 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
121964	139.2 to 140.2 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
121965	142.8 to 143.8 feet	**Vertical Change**	1.87"	5 ft	5	SF	$75	**$375**
121966	148.1 to 149.1 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
121967	153.7 to 154.7 feet	**Vertical Change**	1.01"	5 ft	5	SF	$75	**$375**
121968	157.5 to 158.5 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
121989	172.2 to 182.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
121990	185.3 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,500**
121991	208.9 to 212.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
121992	213.5 to 233.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
121993	233.8 to 243.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
122016	245.7 to 276.7 feet	Key Note Segment		5 ft	155			
121994	278.8 to 289.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
121995	292.1 to 332.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,360**
121970	301.7 to 302.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
121996	337.1 to 341.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
121997	344.0 to 362.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041504	N SCHNOOR AVE	DUTRA WAY	1643 N SCHNOOR AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121998	364.6 to 366.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
121999	367.3 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
122000	371.8 to 386.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	$8,700
121971	372.5 to 373.5 feet	Vertical Change	.27"	5 ft	5	REF		
122001	388.6 to 404.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	$9,780
122002	404.9 to 435.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	$18,360
122003	440.5 to 441.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
122004	444.9 to 451.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
122017	451.5 to 477.2 feet	Key Note Segment		5 ft	129			
121972	452.6 to 453.6 feet	Vertical Change	-.26"	5 ft	5	REF		
122005	477.7 to 483.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
122006	486.4 to 492.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,480
122007	492.3 to 525.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	$19,680
121973	498.6 to 499.6 feet	Vertical Change	.27"	5 ft	5	REF		
121974	524.5 to 525.5 feet	Vertical Change	.67"	5 ft	5	REF		
121975	537.6 to 538.6 feet	Vertical Change	-.52"	5 ft	5	SF	$75	$375
122008	543.3 to 562.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,220
122009	583.2 to 601.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	$10,800
121976	602.6 to 603.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
121977	616.4 to 617.4 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
122010	619.3 to 624.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
122011	638.3 to 647.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
121978	726.3 to 727.3 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
122012	738.3 to 739.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
122013	745.4 to 752.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
122014	789.1 to 791.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
122015	798.8 to 801.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
121979	802.9 to 803.9 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041504	N SCHNOOR AVE	DUTRA WAY	1643 N SCHNOOR AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **N SCHNOOR AVE**	*Starting at:* **DUTRA WAY**						**$245,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131601	N SCHNOOR AVE	DUTRA WAY	TREVOR WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99532	1.0 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
99533	8.5 to 21.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	67	SF	$120	**$7,980**
99529	11.0 to 12.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
99534	22.3 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
99535	25.3 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
99536	38.3 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
99537	46.3 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
99538	55.9 to 59.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
99539	59.8 to 72.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,740**
99540	72.7 to 75.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
99541	76.6 to 77.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
99530	77.5 to 78.5 feet	**Vertical Change**	-.64"	5 ft	5	REF		
99542	77.8 to 81.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
99543	81.3 to 82.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
99544	83.2 to 84.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
99545	84.5 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
99546	94.1 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
99547	97.1 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
99548	113.6 to 127.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
99549	127.7 to 135.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
99550	139.8 to 155.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
99531	150.3 to 151.3 feet	**Vertical Change**	.84"	5 ft	5	REF		
99551	155.3 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
99552	160.3 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
99553	163.2 to 164.8 feet		5.0-6.0%	5 ft	8			
99554	164.8 to 165.8 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **DUTRA WAY** **$73,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131551	N SCHNOOR AVE	FILLMORE AVE	JEFFERSON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99404	0.3 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
99405	10.2 to 11.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
99406	15.7 to 32.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
99402	25.6 to 26.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
99407	42.6 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
99408	54.6 to 58.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
99409	62.6 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
99403	66.8 to 70.3 feet	**Vertical Change**	.42"	5 ft	18	LF	$75	**$1,313**
99410	71.9 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,940**
99411	81.4 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
99412	82.5 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
99413	86.9 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
99414	91.1 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
99415	101.2 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
99416	116.0 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
99417	133.4 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **FILLMORE AVE** **$69,532.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041404	N SCHNOOR AVE	FOXGLOVE WAY	2105 N SCHNOOR AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121576	1.2 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
121577	6.9 to 31.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
121578	31.9 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
121579	49.5 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
121580	82.2 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
121581	86.0 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
121571	89.7 to 90.7 feet	**Vertical Change**	.77"	5 ft	5	REF		
121582	102.5 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
121583	125.6 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
121584	133.8 to 148.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
121572	140.6 to 141.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
121585	149.3 to 152.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
121586	154.7 to 157.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
121587	160.8 to 170.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
121588	172.0 to 190.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,340**
121573	187.7 to 188.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
121589	191.1 to 219.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,800**
121590	221.7 to 227.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
121591	233.6 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
121592	244.1 to 245.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
121593	248.5 to 251.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
121594	254.8 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
121595	260.9 to 263.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
121596	265.2 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
121597	271.7 to 289.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
121575	278.8 to 279.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
121598	292.8 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
121599	298.3 to 327.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	**$17,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041404	N SCHNOOR AVE	FOXGLOVE WAY	2105 N SCHNOOR AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **N SCHNOOR AVE**	*Starting at:* **FOXGLOVE WAY**						**$144,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041422	N SCHNOOR AVE	FOXGLOVE WAY	2000 N SCHNOOR AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121711	0.8 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
121712	3.8 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
121713	9.8 to 18.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,100**
121714	18.3 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
121700	26.8 to 27.8 feet	**Vertical Change**	1.44"	5 ft	5	SF	$75	**$375**
121715	32.3 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121701	35.8 to 36.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
121702	51.9 to 52.9 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
121703	60.8 to 61.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
121704	66.2 to 67.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
121716	66.8 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
121705	68.1 to 71.0 feet	**Vertical Change**	-.27"	5 ft	15	REF		
121706	73.8 to 74.8 feet	**Vertical Change**	-.68"	5 ft	5	REF		
121717	89.8 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	291	SF	$120	**$34,860**
121707	100.8 to 101.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
121708	106.7 to 107.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
121709	123.5 to 124.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
121718	160.1 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
121719	165.7 to 173.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
121710	172.3 to 173.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **FOXGLOVE WAY** **$63,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041426	N SCHNOOR AVE	IRONWOOD WAY	ALDERWOOD CT	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121735	0.7 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
121736	3.8 to 8.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
121737	11.2 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
121738	16.3 to 20.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
121731	17.9 to 18.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
121739	22.1 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
121740	35.8 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	234	SF	$120	**$28,020**
121732	60.3 to 61.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
121741	82.8 to 86.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
121742	90.7 to 92.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
121743	92.2 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
121744	96.3 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
121733	112.5 to 113.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
121745	122.5 to 127.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
121746	127.1 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
121747	144.3 to 152.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
121748	152.9 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
121734	155.6 to 156.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **IRONWOOD WAY** **$95,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131558	N SCHNOOR AVE	JEFFERSON AVE	DUTRA WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99437	3.8 to 6.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
99438	6.9 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
99418	7.3 to 8.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
99419	29.8 to 30.8 feet	**Vertical Change**	2.57"	5 ft	5	SF	$75	**$375**
99439	34.1 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
99420	37.1 to 38.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
99440	40.5 to 63.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
99441	64.8 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
99421	71.7 to 72.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
99422	75.0 to 76.0 feet	**Vertical Change**	.86"	5 ft	5	REF		
99442	75.1 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99443	84.4 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
99424	92.6 to 93.6 feet	**Vertical Change**	1.29"	5 ft	5	SF	$75	**$375**
99444	104.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99445	112.3 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,520**
99425	157.9 to 158.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
99446	158.7 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
99447	167.3 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
99426	182.7 to 183.7 feet	**Vertical Change**	3.41"	5 ft	5	REF		
99448	190.3 to 192.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
99449	199.5 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
99427	201.7 to 202.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
99428	213.1 to 214.1 feet	**Vertical Change**	.67"	5 ft	5	REF		
99450	213.4 to 224.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
99451	229.7 to 234.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
99452	234.1 to 235.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
99453	242.4 to 246.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
99454	246.8 to 248.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131558	N SCHNOOR AVE	JEFFERSON AVE	DUTRA WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99455	249.6 to 251.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
99456	251.5 to 258.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
99457	261.8 to 264.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
99458	266.3 to 273.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
99459	273.5 to 284.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
99460	287.1 to 323.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	183	SF	$120	**$22,020**
99429	316.8 to 317.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
99461	326.3 to 342.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
99462	344.4 to 365.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
99463	365.6 to 375.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
99464	376.1 to 406.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,420**
99430	390.1 to 391.1 feet	**Vertical Change**	2.05"	5 ft	5	REF		
99465	406.8 to 418.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
99466	419.4 to 421.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
99467	451.9 to 458.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
99468	459.2 to 461.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
99469	465.1 to 474.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
99470	488.0 to 494.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
99471	498.5 to 499.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99472	505.3 to 511.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
99473	513.4 to 518.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
99474	520.4 to 523.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
99475	527.6 to 529.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
99476	529.4 to 530.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
99477	533.0 to 542.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
99478	545.0 to 562.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
99431	572.5 to 573.5 feet	**Vertical Change**	1.67"	5 ft	5	SF	$75	**$375**
99479	575.0 to 578.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131558	N SCHNOOR AVE	JEFFERSON AVE	DUTRA WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99480	586.0 to 594.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
99481	597.3 to 602.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
99482	604.7 to 630.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,660**
99483	631.7 to 641.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,060**
99484	644.0 to 651.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
99485	651.6 to 656.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
99432	651.8 to 652.8 feet	**Vertical Change**	.54"	5 ft	5	REF		
99486	661.1 to 665.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
99487	669.3 to 675.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
99488	684.6 to 695.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
99489	696.4 to 700.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
99490	705.4 to 710.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
99491	710.1 to 731.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
99492	734.3 to 746.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
99493	746.6 to 767.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
99494	783.6 to 805.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
99495	805.6 to 820.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
99433	822.2 to 823.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
99496	822.5 to 823.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
99497	826.4 to 851.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$14,940**
99498	853.8 to 881.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,500**
99499	882.8 to 899.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
99500	899.8 to 903.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
99501	903.9 to 923.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
99502	930.5 to 932.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
99503	933.6 to 937.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
99504	937.2 to 941.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
99505	944.3 to 954.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131558	N SCHNOOR AVE	JEFFERSON AVE	DUTRA WAY	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99506	958.2 to 963.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
99507	965.3 to 974.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	44	SF	$120	**$5,220**
99508	974.0 to 980.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
99509	982.3 to 984.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
99510	984.3 to 993.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
99511	996.3 to 1009.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
99512	1012.2 to 1017.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
99513	1019.1 to 1035.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
99514	1039.6 to 1041.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
99515	1045.2 to 1056.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,540**
99516	1056.1 to 1065.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
99434	1056.2 to 1057.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
99517	1069.4 to 1071.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
99518	1072.6 to 1075.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
99519	1076.8 to 1101.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,760**
99520	1104.6 to 1105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
99521	1106.2 to 1118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
99522	1121.1 to 1129.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
99435	1127.0 to 1128.0 feet	**Vertical Change**	.55"	5 ft	5	REF		
99523	1131.7 to 1146.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
99524	1147.8 to 1154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
99525	1154.8 to 1163.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
99526	1165.1 to 1168.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
99527	1170.6 to 1172.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
99528	1172.2 to 1186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
99436	1180.5 to 1181.5 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **JEFFERSON AVE** **$526,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041412	N SCHNOOR AVE	KENNEDY ST	2140 KENNEDY ST	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121649	0.0 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
121645	9.1 to 10.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
121650	38.5 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
121651	51.9 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
121652	59.8 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
121653	66.8 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
121654	81.2 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
121655	86.3 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
121647	99.6 to 100.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
121648	112.5 to 113.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
121656	124.3 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
121657	132.3 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
121658	142.1 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
121659	155.7 to 156.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **KENNEDY ST** **$57,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131357	N SCHNOOR AVE	RIVERVIEW DR	UNIVERSITY AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98014	2.8 to 5.6 feet	Vertical Change	.33"	5 ft	14	REF		
98028	3.7 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
98015	8.0 to 9.0 feet	Vertical Change	3.07"	5 ft	5	REF		
98029	9.2 to 11.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
98030	13.4 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,740
98031	22.1 to 26.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	$2,520
98016	22.8 to 23.8 feet	Vertical Change	.27"	5 ft	5	REF		
98032	29.5 to 30.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	$660
98033	32.7 to 63.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	$18,660
98017	39.4 to 40.4 feet	Vertical Change	.26"	5 ft	5	REF		
98034	63.8 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,120
98018	73.4 to 74.4 feet	Vertical Change	.29"	5 ft	5	REF		
98035	81.4 to 82.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$900
98036	87.4 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
98037	93.9 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
98038	110.9 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
98039	117.7 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
98040	123.3 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
98041	135.6 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
98042	151.8 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
98019	159.4 to 160.4 feet	Vertical Change	.36"	5 ft	5	REF		
98043	171.9 to 174.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
98044	181.8 to 184.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
98045	186.8 to 234.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	237	SF	$120	$28,380
98020	193.7 to 194.7 feet	Vertical Change	.33"	5 ft	5	REF		
98021	202.4 to 203.4 feet	Vertical Change	.28"	5 ft	5	REF		
98022	235.6 to 236.6 feet	Vertical Change	.28"	5 ft	5	REF		
98046	236.0 to 242.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131357	N SCHNOOR AVE	RIVERVIEW DR	UNIVERSITY AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98047	244.4 to 250.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
98048	252.9 to 270.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
98023	261.5 to 262.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
98024	274.0 to 275.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
98049	274.4 to 303.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,340**
98025	278.6 to 279.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
98050	303.3 to 319.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	80	SF	$120	**$9,660**
98051	322.1 to 323.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
98052	323.7 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
98026	346.7 to 347.7 feet	**Vertical Change**	.51"	5 ft	5	REF		
98053	349.3 to 351.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
98054	354.4 to 355.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
98055	358.3 to 359.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
98056	360.0 to 362.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
98057	369.6 to 371.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
98027	375.1 to 376.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **RIVERVIEW DR** **$169,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131607	N SCHNOOR AVE	TREVOR WAY	RIVERVIEW DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99569	1.0 to 4.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
99555	1.9 to 2.9 feet	Vertical Change	.26"	5 ft	5	REF		
99570	8.1 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
99556	15.8 to 16.8 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
99648	21.3 to 22.7 feet		6.0-7.0%	5 ft	7			
99571	23.3 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
99572	28.3 to 29.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
99573	30.3 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
99558	32.0 to 33.0 feet	Vertical Change	.77"	5 ft	5	REF		
99574	36.1 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
99575	41.3 to 67.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
99576	68.3 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
99577	72.5 to 80.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
99578	83.1 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
99579	86.8 to 97.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,360**
99580	99.2 to 130.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	154	SF	$120	**$18,480**
99581	130.5 to 134.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
99582	137.2 to 141.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
99583	145.6 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
99584	151.2 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
99585	154.9 to 161.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
99586	174.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
99587	182.0 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
99588	193.7 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
99589	204.0 to 210.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
99590	210.5 to 214.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
99591	214.8 to 217.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
99592	218.6 to 223.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131607	N SCHNOOR AVE	TREVOR WAY	RIVERVIEW DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99593	223.9 to 284.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	301	SF	$120	**$36,120**
99559	224.3 to 225.3 feet	**Vertical Change**	3.22"	5 ft	5	REF		
99594	284.1 to 305.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
99595	307.8 to 322.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
99560	319.9 to 320.9 feet	**Vertical Change**	.84"	5 ft	5	REF		
99596	324.1 to 333.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
99597	339.3 to 341.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
99598	344.3 to 360.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
99599	361.4 to 368.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
99600	368.8 to 377.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
99601	379.9 to 386.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
99602	388.8 to 398.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
99603	399.0 to 400.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
99604	402.6 to 416.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
99605	426.8 to 429.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
99606	475.7 to 479.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
99607	483.6 to 486.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
99608	488.4 to 499.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
99609	526.8 to 528.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
99610	528.8 to 531.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
99611	533.8 to 535.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
99612	536.1 to 539.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
99613	540.8 to 542.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
99614	545.0 to 554.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
99561	551.7 to 552.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
99615	556.8 to 567.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
99562	559.8 to 560.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
99616	567.8 to 569.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131607	N SCHNOOR AVE	TREVOR WAY	RIVERVIEW DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99617	572.0 to 583.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
99563	576.5 to 577.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
99564	579.8 to 580.8 feet	**Vertical Change**	.94"	5 ft	5	REF		
99565	584.8 to 585.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
99618	585.8 to 593.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
99619	593.8 to 600.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
99620	601.5 to 604.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
99621	606.2 to 625.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
99622	625.2 to 630.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
99623	630.9 to 643.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
99566	636.1 to 637.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
99567	639.0 to 640.0 feet	**Vertical Change**	1.03"	5 ft	5	REF		
99624	645.5 to 655.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
99625	658.0 to 659.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
99626	661.8 to 663.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
99627	666.7 to 670.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
99628	671.7 to 677.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
99629	680.2 to 687.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
99630	690.6 to 692.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
99631	695.0 to 706.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
99632	706.5 to 709.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
99568	711.6 to 712.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
99633	712.1 to 726.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
99634	728.3 to 744.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
99635	746.8 to 755.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
99636	756.8 to 812.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	281	SF	$120	**$33,660**
99637	814.6 to 815.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
99638	818.6 to 824.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131607	N SCHNOOR AVE	TREVOR WAY	RIVERVIEW DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99639	829.3 to 830.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
99640	831.7 to 835.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
99641	835.3 to 845.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
99642	848.7 to 855.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
99643	856.1 to 901.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,060**
99644	902.1 to 907.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
99645	909.4 to 912.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
99646	915.9 to 917.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
99649	917.9 to 919.1 feet		5.0-6.0%	5 ft	6			
99647	919.2 to 921.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **TREVOR WAY** **$403,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131549	N SCHNOOR AVE	UNIVERSITY AVE	FILLMORE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99382	0.0 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
99383	14.9 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
99377	16.7 to 17.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
99378	26.9 to 27.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
99384	32.8 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
99385	42.7 to 44.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
99379	45.1 to 46.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
99386	48.6 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99380	54.1 to 55.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
99387	54.8 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
99388	55.8 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
99389	65.4 to 71.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
99390	71.9 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99391	78.0 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
99392	86.2 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
99393	94.9 to 98.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
99394	98.4 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
99395	104.9 to 109.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
99396	109.1 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
99397	118.4 to 124.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
99401	118.8 to 120.2 feet		5.0-6.0%	5 ft	7			
99398	124.1 to 133.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
99399	133.0 to 140.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
99400	148.3 to 150.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
99381	152.2 to 153.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **UNIVERSITY AVE** **$69,045.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131359	N SCHNOOR AVE	UNIVERSITY AVE	873 ROYAL DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98064	0.1 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
98065	9.5 to 16.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
98066	18.2 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
98058	18.6 to 19.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
98067	28.4 to 34.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
98059	35.4 to 36.4 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
98068	38.0 to 40.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
98069	41.3 to 50.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
98070	52.1 to 53.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
98060	52.3 to 53.3 feet	**Vertical Change**	.58"	5 ft	5	REF		
98071	55.9 to 60.4 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	23	SF	$120	**$2,700**
98080	60.2 to 61.3 feet		5.0-6.0%	5 ft	6			
98072	64.5 to 86.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
98073	86.6 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
98081	87.1 to 88.1 feet		5.0-6.0%	5 ft	5			
98061	103.2 to 104.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
98074	103.8 to 115.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
98075	115.8 to 128.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,860**
98062	120.7 to 121.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
98076	129.6 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	156	SF	$120	**$18,720**
98077	162.1 to 169.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
98078	171.8 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
98079	178.2 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
98063	179.8 to 180.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
98082	183.3 to 184.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **UNIVERSITY AVE** **$91,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041244	N SCHNOOR AVE	W CLEVELAND AVE	2245 W CLEVELAND AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121486	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
121487	21.4 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121482	43.4 to 44.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
121483	66.6 to 67.6 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
121488	79.2 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
121484	88.8 to 89.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
121489	91.8 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
121490	124.4 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
121485	147.4 to 148.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **N SCHNOOR AVE** *Starting at:* **W CLEVELAND AVE** **$35,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202041439	N SCHNOOR AVE	W CLEVELAND AVE	2300 W CLEVELAND AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121861	0.0 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
121855	5.5 to 6.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
121862	9.4 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
121856	9.9 to 10.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
121857	11.6 to 12.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
121863	25.6 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
121864	66.6 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
121858	70.0 to 71.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
121865	82.1 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121866	92.4 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
121859	95.3 to 96.3 feet	**Vertical Change**	-.62"	5 ft	5	REF		
121860	97.5 to 98.5 feet	**Vertical Change**	.73"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **N SCHNOOR AVE** *Starting at:* **W CLEVELAND AVE** **$25,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261341	N WESTBERRY BLV	FAIRFIELD WAY	CURB RAMP	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109507	0.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
109508	8.3 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	407	SF	$120	**$48,840**
109495	10.1 to 11.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
109496	39.8 to 40.8 feet	**Vertical Change**	1.56"	5 ft	5	SF	$75	**$375**
109497	47.9 to 48.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
109509	92.6 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
109498	93.3 to 94.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
109510	111.4 to 164.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	268	SF	$120	**$32,100**
109499	116.4 to 117.4 feet	**Vertical Change**	2.13"	5 ft	5	REF		
109500	152.0 to 153.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
109511	167.1 to 197.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	154	SF	$120	**$18,420**
109512	200.7 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109513	213.0 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
109501	217.1 to 218.1 feet	**Vertical Change**	.6"	5 ft	5	REF		
109514	246.6 to 263.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
109502	259.7 to 260.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
109503	261.6 to 262.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
109515	266.1 to 269.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
109516	270.2 to 288.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
109517	291.3 to 298.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
109518	300.2 to 309.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
109519	317.2 to 324.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
109504	323.8 to 324.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
109520	328.3 to 340.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
109505	335.2 to 336.2 feet	**Vertical Change**	.66"	5 ft	5	REF		
109521	343.2 to 358.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
109522	358.2 to 373.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,120**

TOTAL COST FOR: W *side of* **N WESTBERRY BLV** *Starting at:* **FAIRFIELD WAY** **$198,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261238	N WESTBERRY BLV	FAIRWAY AVE	FAIRFIELD WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109117	5.5 to 22.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
109118	25.3 to 34.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,700**
109119	37.8 to 59.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,960**
109120	61.8 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
109110	87.6 to 88.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109121	99.8 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
109122	103.7 to 110.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
109123	113.9 to 129.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
109124	131.9 to 170.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	193	SF	$120	**$23,160**
109111	151.3 to 152.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109125	170.5 to 182.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
109126	199.4 to 201.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109127	205.6 to 233.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,740**
109112	218.6 to 219.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
109128	233.5 to 250.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
109129	252.8 to 257.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
109130	258.0 to 285.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
109131	289.1 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
109132	293.4 to 299.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
109133	306.1 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
109134	320.8 to 333.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
109114	333.4 to 334.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
109135	336.7 to 343.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
109136	349.0 to 359.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
109137	361.3 to 370.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
109138	371.7 to 384.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
109139	384.4 to 401.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
109140	403.3 to 406.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261238	N WESTBERRY BLV	FAIRWAY AVE	FAIRFIELD WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109141	409.2 to 411.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
109142	412.4 to 428.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
109143	431.9 to 434.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
109144	437.9 to 439.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
109145	442.5 to 484.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
109146	487.7 to 529.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
109147	529.2 to 569.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	201	SF	$120	**$24,120**
109116	569.5 to 570.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **N WESTBERRY BLV** *Starting at:* **FAIRWAY AVE** **$286,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261343	N WESTBERRY BLVD	SALANO CT	N WESTBERRY BLVD	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109528	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
109523	3.5 to 4.5 feet	**Vertical Change**	.73"	5 ft	5	REF		
109529	7.0 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
109530	17.6 to 19.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
109531	19.0 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
109532	41.0 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,400**
109524	41.6 to 42.6 feet	**Vertical Change**	.89"	5 ft	5	REF		
109525	64.9 to 65.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
109526	76.4 to 77.4 feet	**Vertical Change**	.53"	5 ft	5	REF		
109533	83.1 to 85.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
109534	86.2 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
109535	99.6 to 102.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
109536	112.3 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
109527	113.5 to 114.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109537	116.8 to 118.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: W *side of* **N WESTBERRY BLVD** *Starting at:* **SALANO CT** **$50,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271419	NAPOLI ST	MILANO LANE	TRIVISO AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111381	2.9 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111382	18.7 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111399	21.6 to 41.4 feet	Key Note Segment		5 ft	99			
111373	32.6 to 33.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
111383	43.3 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111400	51.3 to 69.1 feet	Key Note Segment		5 ft	89			
111384	70.8 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
111374	79.9 to 80.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111375	106.3 to 107.3 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
111385	109.7 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
111376	114.8 to 115.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
111377	123.3 to 124.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
111386	129.1 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111401	131.3 to 149.5 feet	Key Note Segment		5 ft	91			
111378	132.1 to 133.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
111387	151.4 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
111402	158.7 to 177.7 feet	Key Note Segment		5 ft	95			
111388	187.1 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
111389	220.3 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
111390	236.9 to 238.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
111391	244.3 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
111392	249.0 to 253.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
111393	253.3 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
111380	254.9 to 255.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
111394	259.8 to 261.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
111395	261.4 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
111396	280.9 to 283.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
111397	285.4 to 290.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271419	NAPOLI ST	MILANO LANE	TRIVISO AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111398	290.9 to 300.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: E *side of* **NAPOLI ST** *Starting at:* **MILANO LANE** **$74,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271415	NAPOLI ST	TRIVISO AVE	MILANO LANE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111365	5.1 to 25.4 feet	Key Note Segment		5 ft	102			
111350	27.1 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
111366	31.3 to 54.8 feet	Key Note Segment		5 ft	118			
111346	45.4 to 46.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
111351	55.6 to 56.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
111352	57.3 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
111347	68.2 to 69.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111353	73.8 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111354	79.8 to 87.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
111355	88.1 to 96.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
111367	96.5 to 115.8 feet	Key Note Segment		5 ft	97			
111356	117.9 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111368	125.9 to 146.1 feet	Key Note Segment		5 ft	101			
111348	147.3 to 148.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
111357	167.8 to 179.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
111358	185.5 to 193.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
111369	206.1 to 224.3 feet	Key Note Segment		5 ft	91			
111370	232.3 to 252.6 feet	Key Note Segment		5 ft	102			
111349	272.9 to 273.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
111359	276.5 to 290.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
111360	293.0 to 308.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
111361	312.0 to 314.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
111371	314.6 to 333.0 feet	Key Note Segment		5 ft	92			
111362	334.4 to 342.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
111372	342.9 to 360.2 feet	Key Note Segment		5 ft	87			
111363	362.3 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111364	368.1 to 385.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**

TOTAL COST FOR: W *side of* **NAPOLI ST** *Starting at:* **TRIVISO AVE** **$66,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241624	NATIONAL AVE	1822 NATIONAL AVE	WILLIAMS AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107582	0.0 to 1.1 feet	Cross Slope (PAR)	6.0-7.0%	7 ft	8	SF	$120	**$924**
107583	1.3 to 4.0 feet	Cross Slope (PAR)	5.0-6.0%	7 ft	19	SF	$120	**$2,268**
107571	2.6 to 3.6 feet	**Vertical Change**	-.56"	7 ft	7	REF		
107584	4.8 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	11	SF	$120	**$1,260**
107585	6.3 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	298	SF	$120	**$35,700**
107572	7.8 to 8.8 feet	**Vertical Change**	.3"	7 ft	7	REF		
107573	34.7 to 35.7 feet	**Vertical Change**	1.82"	7 ft	7	REF		
107586	52.3 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	77	SF	$120	**$9,240**
107587	63.3 to 79.5 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	113	SF	$120	**$13,608**
107588	79.8 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	187	SF	$120	**$22,428**
107589	106.5 to 116.9 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	73	SF	$120	**$8,736**
107590	116.9 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	103	SF	$120	**$12,348**
107591	131.6 to 227.3 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	670	SF	$120	**$80,388**
107574	180.9 to 181.9 feet	**Vertical Change**	.62"	7 ft	7	REF		
107592	227.3 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	161	SF	$120	**$19,320**
107593	250.9 to 259.9 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	63	SF	$120	**$7,560**
107575	256.9 to 257.9 feet	**Vertical Change**	.98"	7 ft	7	REF		
107594	259.9 to 320.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	427	SF	$120	**$51,240**
107576	286.6 to 287.6 feet	**Vertical Change**	.28"	7 ft	7	REF		
107577	297.0 to 298.0 feet	**Vertical Change**	-.34"	7 ft	7	REF		
107595	323.6 to 329.5 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	41	SF	$120	**$4,956**
107596	330.3 to 331.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,344**
107597	338.3 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	111	SF	$120	**$13,272**
107578	351.9 to 352.9 feet	**Vertical Change**	-.31"	7 ft	7	REF		
107598	356.5 to 379.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	163	SF	$120	**$19,572**
107599	380.2 to 415.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	246	SF	$120	**$29,568**
107600	415.4 to 430.4 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	105	SF	$120	**$12,600**
107601	430.4 to 432.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	15	SF	$120	**$1,848**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241624	NATIONAL AVE	1822 NATIONAL AVE	WILLIAMS AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107602	448.3 to 475.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	193	SF	$120	**$23,100**
107579	451.8 to 452.8 feet	**Vertical Change**	.45"	7 ft	7	REF		
107580	462.1 to 463.1 feet	**Vertical Change**	.31"	7 ft	7	REF		
107603	476.8 to 504.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	196	SF	$120	**$23,520**
107604	505.4 to 510.8 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	38	SF	$120	**$4,536**
107605	511.8 to 514.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	19	SF	$120	**$2,268**
107606	517.3 to 531.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	97	SF	$120	**$11,676**
107607	535.1 to 536.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,260**
107615	539.4 to 561.7 feet	Key Note Segment		7 ft	156			
107608	561.8 to 564.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	7 ft	15	SF	$40	**$616**
107609	569.8 to 575.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	41	SF	$120	**$4,956**
107610	581.9 to 585.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,276**
107616	596.8 to 630.3 feet	Key Note Segment		7 ft	235			
107617	648.3 to 664.8 feet	Key Note Segment		7 ft	116			
107611	664.8 to 697.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	7 ft	231	SF	$40	**$9,240**
107581	685.4 to 686.4 feet	**Vertical Change**	.29"	7 ft	7	REF		
107612	705.5 to 707.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	13	SF	$120	**$1,596**
107613	710.8 to 717.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	46	SF	$120	**$5,460**
107614	726.2 to 730.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,276**

TOTAL COST FOR: S *side of* **NATIONAL AVE** *Starting at:* **1822 NATIONAL AVE** **$442,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111611	NATIONAL AVE	500 NATIONAL AVE	509 HEATHERWOOD DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93242	1.1 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
93243	6.1 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
93237	20.8 to 21.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
93238	22.7 to 23.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
93244	26.9 to 36.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
93239	30.3 to 31.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
93240	34.5 to 35.5 feet	**Vertical Change**	.59"	5 ft	5	REF		
93245	39.3 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
93241	47.7 to 48.7 feet	**Vertical Change**	.58"	5 ft	5	REF		
93246	47.7 to 49.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **NATIONAL AVE** *Starting at:* **500 NATIONAL AVE** **$23,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111625	NATIONAL AVE	504 VALLEY WAY	VALLEY WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93402	0.0 to 3.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
93403	9.0 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
93404	12.3 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
93405	17.8 to 24.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
93410	26.0 to 35.3 feet	Key Note Segment		5 ft	46			
93406	39.3 to 42.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
93407	47.4 to 49.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
93408	49.3 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
93409	70.8 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: S *side of* **NATIONAL AVE** *Starting at:* **504 VALLEY WAY** **$30,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111623	NATIONAL AVE	HEATHERWOOD DR	2511 NATIONAL AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93379	0.0 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
93380	5.2 to 10.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
93381	11.1 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
93382	20.3 to 26.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
93383	28.9 to 31.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
93384	32.0 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
93385	39.2 to 48.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**
93386	50.8 to 55.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
93387	55.6 to 56.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
93388	57.8 to 58.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
93389	59.3 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
93374	61.1 to 62.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
93390	71.8 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
93391	85.8 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
93392	96.7 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
93393	112.6 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
93398	116.6 to 131.6 feet	Key Note Segment		5 ft	75			
93375	131.8 to 132.8 feet	**Vertical Change**	-.46"	5 ft	5	REF		
93394	139.8 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
93376	154.7 to 155.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
93399	156.0 to 171.9 feet	Key Note Segment		5 ft	80			
93395	172.4 to 186.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	73	SF	$40	**$2,900**
93377	175.5 to 176.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
93378	188.5 to 189.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
93396	190.0 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
93397	196.5 to 205.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
93400	202.9 to 205.3 feet		5.0-6.0%	5 ft	12			
93401	202.9 to 205.3 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111623	NATIONAL AVE	HEATHERWOOD DR	2511 NATIONAL AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **NATIONAL AVE**	*Starting at:* **HEATHERWOOD DR**					**$76,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241611	NATIONAL AVE	SCHNOOR AVE	2001 NATIONAL AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107506	1.6 to 2.6 feet	Vertical Change	.31"	5 ft	5	REF		
107530	2.4 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
107531	6.9 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
107507	8.0 to 9.0 feet	Vertical Change	.28"	5 ft	5	REF		
107508	9.7 to 10.7 feet	Vertical Change	-.52"	5 ft	5	SF	$75	$375
107532	10.8 to 16.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,120
107533	16.0 to 22.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020
107546	24.3 to 45.5 feet	Key Note Segment		5 ft	106			
107509	27.3 to 28.3 feet	Vertical Change	.3"	5 ft	5	REF		
107510	42.0 to 43.0 feet	Vertical Change	1.93"	5 ft	5	REF		
107534	47.9 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
107511	48.5 to 49.5 feet	Vertical Change	-.27"	5 ft	5	REF		
107512	53.4 to 54.4 feet	Vertical Change	.37"	5 ft	5	REF		
107513	57.1 to 58.1 feet	Vertical Change	.8"	5 ft	5	SF	$75	$375
107514	60.2 to 64.8 feet	Vertical Change	.36"	5 ft	23	LF	$75	$1,725
107535	62.6 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$8,040
107515	68.5 to 69.5 feet	Vertical Change	.34"	5 ft	5	REF		
107516	73.6 to 74.6 feet	Vertical Change	.51"	5 ft	5	REF		
107517	78.4 to 84.1 feet	Vertical Change	.48"	5 ft	28	REF		
107536	79.1 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
107537	81.8 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,460
107518	87.5 to 90.4 feet	Vertical Change	.53"	5 ft	15	REF		
107519	96.5 to 97.5 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
107538	98.6 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
107539	101.1 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	271	SF	$120	$32,520
107520	101.9 to 102.9 feet	Vertical Change	.44"	5 ft	5	REF		
107521	120.9 to 121.9 feet	Vertical Change	-.27"	5 ft	5	REF		
107522	146.8 to 147.8 feet	Vertical Change	.89"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241611	NATIONAL AVE	SCHNOOR AVE	2001 NATIONAL AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107540	155.3 to 160.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,180**
107523	158.2 to 159.2 feet	**Vertical Change**	2.52"	5 ft	5	REF		
107541	161.9 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
107542	171.2 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
107525	182.7 to 183.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
107526	217.2 to 218.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
107543	219.6 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
107528	225.9 to 226.9 feet	**Vertical Change**	2.49"	5 ft	5	REF		
107544	228.3 to 240.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
107545	240.3 to 255.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**

TOTAL COST FOR: N *side of* **NATIONAL AVE** *Starting at:* **SCHNOOR AVE** **$108,945.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241617	NATIONAL AVE	SCHNOOR AVE	1908 NATIONAL AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107551	0.9 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
107547	9.0 to 10.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
107552	12.3 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
107553	19.2 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
107548	26.2 to 27.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
107567	39.8 to 54.8 feet	Key Note Segment		5 ft	75			
107549	53.7 to 54.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
107554	56.9 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
107555	69.4 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
107556	80.9 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
107557	87.8 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
107568	94.0 to 118.9 feet	Key Note Segment		5 ft	125			
107558	121.1 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
107559	133.0 to 137.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
107560	141.7 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
107561	148.4 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
107562	161.2 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
107569	163.8 to 181.6 feet	Key Note Segment		5 ft	89			
107563	183.4 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
107564	201.7 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
107565	218.4 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
107570	221.0 to 240.1 feet	Key Note Segment		5 ft	96			
107550	233.6 to 234.6 feet	**Vertical Change**	3.35"	5 ft	5	REF		
107566	242.0 to 244.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **NATIONAL AVE** *Starting at:* **SCHNOOR AVE** **$40,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111609	NATIONAL AVE	VALLEY WAY	424 NATIONAL AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93233	1.8 to 24.5 feet	Key Note Segment		5 ft	114			
93211	2.1 to 3.1 feet	Vertical Change	-.34"	5 ft	5	REF		
93215	24.5 to 45.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	104	SF	$40	**$4,160**
93212	25.3 to 26.3 feet	Vertical Change	.28"	5 ft	5	REF		
93216	47.8 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
93217	56.1 to 60.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
93218	60.0 to 63.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
93219	65.5 to 74.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,220**
93220	76.1 to 82.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,080**
93221	83.8 to 85.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
93222	85.8 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
93223	93.5 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
93224	103.2 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93234	104.3 to 126.0 feet	Key Note Segment		5 ft	109			
93225	126.2 to 127.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
93213	126.7 to 127.7 feet	Vertical Change	-.28"	5 ft	5	REF		
93226	127.3 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
93227	132.4 to 136.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
93228	139.3 to 144.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
93229	144.6 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
93230	149.0 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
93235	174.7 to 197.6 feet	Key Note Segment		5 ft	115			
93231	197.6 to 202.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	26	SF	$40	**$1,040**
93214	205.4 to 206.4 feet	Vertical Change	2.17"	5 ft	5	SF	$75	**$375**
93232	208.4 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
93236	231.8 to 250.7 feet	Key Note Segment		5 ft	95			

TOTAL COST FOR: S *side of* **NATIONAL AVE** *Starting at:* **VALLEY WAY** **$73,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191532	NAVEL AVE	1027 NAVEL AVE	VALENCIA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104205	2.1 to 20.7 feet	Key Note Segment		5 ft	93			
104194	21.4 to 22.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
104200	22.9 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,340**
104195	43.0 to 44.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
104201	49.0 to 63.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
104196	49.5 to 50.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
104202	65.8 to 70.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
104206	70.3 to 90.3 feet	Key Note Segment		5 ft	100			
104203	92.1 to 107.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
104207	107.4 to 126.5 feet	Key Note Segment		5 ft	96			
104197	117.4 to 118.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
104204	128.0 to 147.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,820**
104198	143.6 to 144.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
104199	148.8 to 149.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **NAVEL AVE** *Starting at:* **1027 NAVEL AVE** **$47,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191513	NAVEL AVE	1028 NAVEL AVE	LEMON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104018	0.1 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
104034	3.3 to 23.8 feet	Key Note Segment		5 ft	103			
104019	25.7 to 27.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
104020	27.4 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
104021	33.5 to 42.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
104009	41.6 to 42.6 feet	Vertical Change	-.29"	5 ft	5	REF		
104022	42.7 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
104010	47.0 to 48.0 feet	Vertical Change	.29"	5 ft	5	REF		
104023	52.2 to 65.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
104035	65.8 to 85.0 feet	Key Note Segment		5 ft	96			
104011	75.8 to 76.8 feet	Vertical Change	-.28"	5 ft	5	REF		
104024	86.4 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
104036	94.5 to 114.1 feet	Key Note Segment		5 ft	98			
104025	114.5 to 135.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	103	SF	$40	**$4,120**
104012	122.8 to 123.8 feet	Vertical Change	-.45"	5 ft	5	REF		
104013	136.4 to 137.4 feet	Vertical Change	.3"	5 ft	5	REF		
104026	137.3 to 159.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,380**
104014	141.8 to 142.8 feet	Vertical Change	.28"	5 ft	5	REF		
104037	160.4 to 179.5 feet	Key Note Segment		5 ft	96			
104015	170.2 to 171.2 feet	Vertical Change	-.27"	5 ft	5	REF		
104027	181.5 to 182.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
104028	182.7 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
104038	185.6 to 205.0 feet	Key Note Segment		5 ft	97			
104016	196.2 to 197.2 feet	Vertical Change	.27"	5 ft	5	REF		
104029	207.4 to 212.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
104030	217.9 to 224.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
104031	224.5 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
104032	232.3 to 238.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191513	NAVEL AVE	1028 NAVEL AVE	LEMON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104033	238.2 to 245.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
104039	247.7 to 268.0 feet	Key Note Segment		5 ft	102			
104017	270.9 to 271.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **NAVEL AVE** *Starting at:* **1028 NAVEL AVE** **$64,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191410	NAVEL AVE	936 NAVAL AVE	VALENCIA AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103622	9.2 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
103617	20.6 to 21.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
103623	25.9 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
103618	26.2 to 27.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
103624	36.9 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
103628	44.1 to 63.3 feet	Key Note Segment		5 ft	96			
103625	65.2 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
103629	70.3 to 88.0 feet	Key Note Segment		5 ft	89			
103620	79.7 to 80.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
103626	89.8 to 103.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
103621	106.1 to 107.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
103627	106.1 to 107.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **NAVEL AVE** *Starting at:* **936 NAVAL AVE** **$26,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191530	NAVEL AVE	LEMON AVE	1039 NAVAL AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104180	0.0 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
104181	8.1 to 13.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
104190	13.6 to 33.7 feet	Key Note Segment		5 ft	101			
104182	36.4 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
104172	36.9 to 37.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
104183	42.5 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
104173	43.1 to 44.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
104191	48.1 to 67.6 feet	Key Note Segment		5 ft	97			
104174	58.4 to 59.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
104175	68.0 to 69.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
104184	69.7 to 88.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,160**
104185	91.0 to 98.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
104192	98.9 to 119.3 feet	Key Note Segment		5 ft	102			
104186	121.4 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
104187	135.9 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
104176	143.3 to 144.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104188	150.7 to 168.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
104177	156.0 to 157.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
104193	169.3 to 189.3 feet	Key Note Segment		5 ft	100			
104178	170.2 to 171.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
104179	179.8 to 180.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
104189	190.8 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: N *side of* **NAVEL AVE** *Starting at:* **LEMON AVE** **$56,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191408	NAVEL AVE	TANGERINE AVE	924 NAVAL AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103614	1.0 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
103616	7.1 to 27.0 feet	Key Note Segment		5 ft	100			
103615	30.3 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**

TOTAL COST FOR: S *side of* **NAVEL AVE** *Starting at:* **TANGERINE AVE** **$8,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191314	NAVEL AVE	VALENCIA AVE	TANGERINE AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103291	0.0 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
103280	2.1 to 3.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
103306	18.1 to 37.9 feet	Key Note Segment		5 ft	99			
103281	18.9 to 19.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
103292	40.8 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
103293	42.3 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
103307	45.0 to 64.8 feet	Key Note Segment		5 ft	99			
103294	66.1 to 82.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
103295	82.7 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
103282	88.2 to 89.2 feet	**Vertical Change**	3.25"	5 ft	5	SF	$75	**$375**
103283	90.7 to 91.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
103284	96.7 to 97.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
103308	108.9 to 129.3 feet	Key Note Segment		5 ft	102			
103296	129.9 to 135.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
103309	135.7 to 155.3 feet	Key Note Segment		5 ft	98			
103285	146.1 to 147.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
103297	156.2 to 159.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
103298	159.5 to 161.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
103299	164.8 to 180.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
103286	172.6 to 173.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
103287	180.3 to 181.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
103300	180.3 to 182.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
103301	184.5 to 188.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
103288	187.8 to 188.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
103302	190.6 to 194.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
103303	194.9 to 201.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
103310	201.2 to 220.8 feet	Key Note Segment		5 ft	98			
103289	211.8 to 212.8 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191314	NAVEL AVE	VALENCIA AVE	TANGERINE AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103304	222.1 to 223.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103305	223.1 to 225.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
103290	224.8 to 225.8 feet	**Vertical Change**	.4"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **NAVEL AVE** *Starting at:* **VALENCIA AVE** **$64,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191510	NAVEL AVE	VALENCIA AVE	1028 NAVEL AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103985	0.3 to 1.3 feet	Vertical Change	.3"	5 ft	5	REF		
103995	0.4 to 4.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
104007	0.8 to 1.8 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
103986	4.1 to 5.1 feet	Vertical Change	.51"	5 ft	5	REF		
103996	4.4 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
103997	14.1 to 19.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
103987	19.3 to 20.3 feet	Vertical Change	-.35"	5 ft	5	REF		
104005	19.3 to 38.6 feet	Key Note Segment		5 ft	97			
103988	38.5 to 39.5 feet	Vertical Change	.29"	5 ft	5	REF		
103998	38.7 to 39.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	5	SF	$40	**$200**
103999	44.1 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
104006	45.2 to 62.9 feet	Key Note Segment		5 ft	89			
103989	45.5 to 46.5 feet	Vertical Change	.26"	5 ft	5	REF		
104000	66.0 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
103990	67.9 to 68.9 feet	Vertical Change	-.34"	5 ft	5	REF		
104001	74.7 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
103991	82.0 to 83.0 feet	Vertical Change	-.35"	5 ft	5	REF		
104002	82.8 to 84.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
103992	87.5 to 88.5 feet	Vertical Change	.29"	5 ft	5	REF		
104003	88.0 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
103993	90.8 to 91.8 feet	Vertical Change	1.11"	5 ft	5	REF		
104004	104.0 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
103994	111.2 to 112.2 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **NAVEL AVE** *Starting at:* **VALENCIA AVE** **$26,534.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202021046	NEBRASKA AVE	W SHERWOOD WAY	1220 NEBRASKA AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117471	0.0 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
117481	5.0 to 6.0 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
117472	17.3 to 25.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
117473	25.1 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
117474	32.3 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
117482	34.2 to 35.2 feet	**Protruding Object**	36"	5 ft	5	JOB	$99	**$99**
117479	39.3 to 51.9 feet	Key Note Segment		5 ft	63			
117466	39.9 to 40.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
117475	51.9 to 53.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
117476	60.9 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
117467	64.8 to 65.8 feet	**Vertical Change**	.73"	5 ft	5	REF		
117468	69.0 to 70.0 feet	**Vertical Change**	2.93"	5 ft	5	REF		
117480	74.1 to 86.9 feet	Key Note Segment		5 ft	64			
117477	86.9 to 112.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	129	SF	$40	**$5,140**
117469	105.0 to 106.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
117478	116.8 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
117470	118.1 to 119.1 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **NEBRASKA AVE** *Starting at:* **W SHERWOOD WAY** **$32,438.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031339	NEBRASKA ST	708 NEBRASKA ST	RIVERSIDE DR	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120251	1.0 to 27.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
120252	32.2 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
120247	42.8 to 43.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
120253	56.8 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
120254	73.1 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
120255	86.3 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
120256	112.8 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
120257	120.1 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120261	121.3 to 141.8 feet	Key Note Segment		5 ft	103			
120258	142.0 to 144.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$460**
120259	144.3 to 185.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
120248	169.1 to 170.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
120249	177.7 to 178.7 feet	**Vertical Change**	-.49"	5 ft	5	REF		
120250	188.5 to 189.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
120260	188.5 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: W *side of* **NEBRASKA ST** *Starting at:* **708 NEBRASKA ST** **$63,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031342	NEBRASKA ST	711 NEBRASKA ST	711 NEBRASKA ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120263	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	30	SF	$120	**$3,564**
120264	11.3 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	83	SF	$120	**$9,936**
120262	41.7 to 42.7 feet	**Vertical Change**	.26"	9 ft	9	LF	$75	**$675**
120265	44.3 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	13	SF	$120	**$1,512**
120266	47.3 to 50.2 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	26	SF	$120	**$3,132**

TOTAL COST FOR: E *side of* **NEBRASKA ST** *Starting at:* **711 NEBRASKA ST** **$18,819.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031337	NEBRASKA ST	718 NEBRASKA ST	724 NEBRASKA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120246	1.2 to 14.5 feet	Key Note Segment		5 ft	67			
120243	13.3 to 14.3 feet	**Vertical Change**	-.44"	5 ft	5	REF		
120245	22.9 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
120244	36.3 to 37.3 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **NEBRASKA ST** *Starting at:* **718 NEBRASKA ST** **$6,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031344	NEBRASKA ST	721 NEBRASKA ST	727 NEBRASKA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120267	7.6 to 8.6 feet	Vertical Change	-.39"	5 ft	5	LF	$75	**$375**
120269	8.8 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
120270	35.4 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
120268	41.6 to 42.6 feet	Vertical Change	.31"	5 ft	5	REF		
120271	50.4 to 53.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
120272	54.0 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**

TOTAL COST FOR: E *side of* **NEBRASKA ST** *Starting at:* **721 NEBRASKA ST** **$36,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031335	NEBRASKA ST	W SOUTH ST	404 NEBRASKA ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120240	6.1 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
120241	14.7 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
120242	23.5 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: W *side of* **NEBRASKA ST** *Starting at:* **W SOUTH ST** **$11,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191401	NECTARINE ST	KNOX ST	PEACH ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74234	0.8 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
74228	7.5 to 8.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
74235	16.0 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
74236	21.6 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,524**
74237	58.3 to 59.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
74238	61.4 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
74239	66.1 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,018**
74240	88.5 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,052**
74241	92.3 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
74250	96.3 to 119.3 feet	Key Note Segment		5 ft	104			
74242	119.9 to 122.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,566**
74251	122.8 to 145.6 feet	Key Note Segment		5 ft	103			
74229	133.9 to 134.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
74243	145.6 to 147.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	10	SF	$40	**$396**
74244	148.2 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
74245	153.3 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
74252	174.7 to 196.2 feet	Key Note Segment		5 ft	97			
74230	196.3 to 197.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
74246	197.6 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74253	200.5 to 222.3 feet	Key Note Segment		5 ft	98			
74231	201.1 to 202.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
74247	226.8 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,186**
74248	237.3 to 257.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,124**
74232	251.0 to 252.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
74233	254.3 to 255.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
74249	258.6 to 259.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$594**

TOTAL COST FOR: N *side of* **NECTARINE ST** *Starting at:* **KNOX ST** **$57,204.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191358	NECTARINE ST	PEACH ST	KNOX ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74216	1.3 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$972**
74217	3.8 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
74218	28.9 to 56.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,634**
74213	37.4 to 38.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74219	60.4 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,376**
74220	64.8 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,308**
74221	96.4 to 99.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,458**
74222	99.1 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,932**
74214	109.1 to 110.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
74223	127.9 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	472	SF	$120	**$56,646**
74224	236.7 to 240.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,106**
74225	242.8 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,900**
74226	278.3 to 290.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,804**
74215	288.9 to 289.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
74227	292.8 to 303.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,832**

TOTAL COST FOR: S *side of* **NECTARINE ST** *Starting at:* **PEACH ST** **$152,928.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131035	NEPLUS WY	DRAKE ST	KNOX ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61662	0.6 to 2.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
61661	3.1 to 4.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
61663	5.1 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
61664	11.8 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
61665	27.3 to 29.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
61666	29.9 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: S *side of* **NEPLUS WY** *Starting at:* **DRAKE ST** **$20,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131134	NEPLUS WY	KNOX ST	DRAKE ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62098	2.3 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
62099	6.3 to 25.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
62100	29.8 to 34.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
62101	34.8 to 39.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,060**
62097	35.2 to 36.2 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **NEPLUS WY** *Starting at:* **KNOX ST** **$18,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011403	NICOLA WAY	NOREEN WAY	W SHERWOOD WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116536	0.0 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,248**
116529	11.7 to 12.7 feet	Vertical Change	.3"	4 ft	4	REF		
116530	13.9 to 14.9 feet	Vertical Change	1.47"	4 ft	4	REF		
116537	17.3 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
116538	20.5 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
116539	26.0 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
116540	28.3 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	**$9,600**
116531	39.8 to 40.8 feet	Vertical Change	-.27"	4 ft	4	REF		
116548	54.9 to 69.1 feet	Key Note Segment		4 ft	57			
116541	70.0 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	21	SF	$120	**$2,544**
116532	70.6 to 71.6 feet	Vertical Change	-.52"	4 ft	4	REF		
116533	74.7 to 75.7 feet	Vertical Change	.29"	4 ft	4	REF		
116542	76.7 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	231	SF	$120	**$27,744**
116549	77.3 to 78.3 feet	Protruding Object	48"	4 ft	4	JOB	$99	**$99**
116543	134.5 to 136.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$960**
116544	141.3 to 146.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	19	SF	$120	**$2,304**
116545	146.6 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
116534	151.5 to 152.5 feet	Vertical Change	.32"	4 ft	4	REF		
116546	155.1 to 164.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,464**
116547	164.8 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
116535	177.5 to 178.5 feet	Vertical Change	.34"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **NICOLA WAY** *Starting at:* **NOREEN WAY** **$66,723.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011405	NICOLA WAY	W SHERWOOD WAY	NOREEN WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116550	0.8 to 1.8 feet	Vertical Change	.47"	4 ft	4	LF	$75	$300
116557	3.4 to 11.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	$4,080
116558	13.3 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$528
116559	17.5 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	$2,064
116551	19.7 to 20.7 feet	Vertical Change	1.55"	4 ft	4	REF		
116560	22.2 to 27.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	21	SF	$120	$2,544
116561	28.3 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,160
116562	37.1 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,456
116563	44.3 to 61.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	68	SF	$120	$8,112
116552	47.0 to 48.0 feet	Vertical Change	-.26"	4 ft	4	REF		
116575	48.4 to 49.4 feet	Protruding Object	72"	4 ft	4	JOB	$99	$99
116564	63.7 to 72.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	$3,984
116565	72.0 to 79.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	29	SF	$120	$3,456
116566	79.7 to 83.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	$1,584
116567	92.2 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,248
116568	98.8 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$672
116553	101.2 to 102.2 feet	Vertical Change	.41"	4 ft	4	LF	$75	$300
116569	105.3 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	$6,000
116570	120.8 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$720
116571	123.0 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	$3,024
116572	131.0 to 152.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	84	SF	$120	$10,128
116554	134.9 to 135.9 feet	Vertical Change	.67"	4 ft	4	REF		
116573	152.8 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$960
116555	154.4 to 155.4 feet	Vertical Change	.31"	4 ft	4	REF		
116556	159.3 to 160.3 feet	Vertical Change	3.46"	4 ft	4	REF		
116574	159.3 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	$8,976

TOTAL COST FOR: E *side of* **NICOLA WAY** *Starting at:* **W SHERWOOD WAY** **$64,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191633	NINTH ST	429 S J ST	S J ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40056	5.9 to 33.3 feet	Key Note Segment		5 ft	137			
40048	17.6 to 18.6 feet	Vertical Change	.31"	5 ft	5	REF		
40049	25.7 to 26.7 feet	Vertical Change	.97"	5 ft	5	REF		
40051	33.3 to 35.8 feet	Cross Slope (Driveway)	7.0-8.0%	5 ft	13	SF	$40	**$500**
40052	36.8 to 38.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
40053	39.1 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
40050	88.7 to 89.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
40054	119.2 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
40055	123.1 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: NW *side of* **NINTH ST** *Starting at:* **429 S J ST** **$4,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191645	NINTH ST	500 NINTH ST	S I ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40103	0.0 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	45	SF	$120	**$5,400**
40104	10.4 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	142	SF	$120	**$17,064**
40105	37.5 to 50.8 feet	Cross Slope (PAR)	11.0-12.0%	6 ft	80	SF	$120	**$9,576**
40106	54.3 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
40107	58.3 to 96.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	230	SF	$120	**$27,648**
40098	70.7 to 71.7 feet	Vertical Change	.29"	6 ft	6	REF		
40099	87.9 to 88.9 feet	Vertical Change	.26"	6 ft	6	REF		
40100	94.4 to 95.4 feet	Vertical Change	-.31"	6 ft	6	REF		
40108	100.8 to 114.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	82	SF	$120	**$9,792**
40109	118.2 to 124.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	40	SF	$120	**$4,752**
40110	127.4 to 176.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	292	SF	$120	**$35,064**
40101	128.6 to 129.6 feet	Vertical Change	.38"	6 ft	6	REF		
40111	177.3 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	396	SF	$120	**$47,520**
40102	230.1 to 231.1 feet	Vertical Change	-.26"	6 ft	6	REF		
40112	248.5 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
40113	256.7 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,112**
40114	279.1 to 280.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
40115	281.2 to 304.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	142	SF	$120	**$16,992**
40116	304.8 to 355.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	302	SF	$120	**$36,216**
40117	358.0 to 360.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,088**
40118	364.6 to 372.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	45	SF	$120	**$5,400**
40119	377.0 to 378.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$936**
40120	378.6 to 388.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	61	SF	$120	**$7,344**
40121	391.4 to 393.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	10	SF	$120	**$1,152**
40122	395.3 to 399.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	26	SF	$120	**$3,096**

TOTAL COST FOR: SE *side of* **NINTH ST** *Starting at:* **500 NINTH ST** **$242,208.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105171620	NINTH ST	S I ST	509 S I ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36298	0.0 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	147	SF	$120	**$17,640**
36299	28.4 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	493	SF	$120	**$59,112**
36300	110.5 to 128.3 feet	Key Note Segment		6 ft	107			
36297	126.2 to 127.2 feet	**Vertical Change**	.63"	6 ft	6	REF		

TOTAL COST FOR: SE *side of* **NINTH ST** *Starting at:* **S I ST** **$76,752.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191637	NINTH ST	S J ST	S K ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40057	16.2 to 17.2 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
40078	23.9 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	$19,620
40058	24.2 to 25.2 feet	Vertical Change	-.44"	5 ft	5	REF		
40059	32.6 to 33.6 feet	Vertical Change	.48"	5 ft	5	REF		
40060	46.6 to 47.6 feet	Vertical Change	.74"	5 ft	5	REF		
40061	57.6 to 58.6 feet	Vertical Change	-.52"	5 ft	5	SF	$75	$375
40062	59.4 to 60.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
40079	61.8 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
40085	65.9 to 79.5 feet	Key Note Segment		5 ft	68			
40080	93.1 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
40064	104.5 to 105.5 feet	Vertical Change	.27"	5 ft	5	REF		
40081	111.0 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	$8,640
40086	125.4 to 145.8 feet	Key Note Segment		5 ft	102			
40065	126.0 to 127.0 feet	Vertical Change	-.28"	5 ft	5	REF		
40066	127.7 to 130.4 feet	Vertical Change	.65"	5 ft	14	REF		
40067	140.8 to 144.4 feet	Vertical Change	.42"	5 ft	18	REF		
40068	145.5 to 146.5 feet	Vertical Change	3.17"	5 ft	5	REF		
40082	156.0 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
40069	164.8 to 165.8 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
40083	174.4 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
40070	186.1 to 187.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
40087	186.3 to 197.8 feet	Key Note Segment		5 ft	58			
40084	198.8 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
40071	199.0 to 200.0 feet	Vertical Change	.43"	5 ft	5	REF		
40072	207.7 to 208.7 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
40074	228.3 to 229.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
40075	237.8 to 238.8 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
40076	250.7 to 251.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191637	NINTH ST	S J ST	S K ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40077	264.1 to 265.1 feet	Vertical Change	-.37"	5 ft	5	LF	$75	**$375**
40088	271.3 to 272.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: NW *side of* **NINTH ST** *Starting at:* **S J ST** **$50,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191640	NINTH ST	S K ST	501 9TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40089	0.0 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
40090	24.1 to 42.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,220**
40091	45.3 to 51.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
40092	54.4 to 73.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
40097	73.8 to 88.5 feet	Key Note Segment		5 ft	74			
40093	90.1 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
40094	100.5 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
40095	109.6 to 113.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
40096	114.1 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**

TOTAL COST FOR: SE *side of* **NINTH ST** *Starting at:* **S K ST** **$55,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211632	NOBLE ST	421 NOBLE ST	421 NOBLE ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106734	1.3 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
106740	3.1 to 22.3 feet	Key Note Segment		5 ft	96			
106730	4.6 to 5.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
106735	23.3 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
106736	45.2 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
106737	75.9 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
106738	87.3 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,500**
106731	104.4 to 105.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
106741	124.8 to 146.4 feet	Key Note Segment		5 ft	108			
106732	137.4 to 138.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
106739	147.7 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
106733	148.2 to 149.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **NOBLE ST** *Starting at:* **421 NOBLE ST** **$39,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211623	NOBLE ST	690 NOBLE ST	GILL AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106663	0.0 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106664	9.6 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
106642	15.6 to 16.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
106665	25.8 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
106666	39.1 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
106643	50.1 to 51.1 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
106667	51.4 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
106644	59.0 to 60.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
106668	72.5 to 73.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
106669	77.4 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
106645	78.1 to 79.1 feet	**Vertical Change**	-.46"	5 ft	5	REF		
106724	81.7 to 149.0 feet	Key Note Segment		5 ft	337			
106670	156.0 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
106671	166.4 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$19,980**
106646	184.0 to 185.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
106647	196.3 to 197.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
106672	217.1 to 218.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106673	224.2 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
106648	231.0 to 232.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
106674	231.2 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
106649	242.2 to 243.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
106675	258.3 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106725	259.7 to 294.8 feet	Key Note Segment		5 ft	176			
106650	282.9 to 283.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
106651	289.4 to 290.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
106676	295.7 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
106677	302.9 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
106678	312.6 to 314.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211623	NOBLE ST	690 NOBLE ST	GILL AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106679	314.0 to 315.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106680	323.6 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
106681	328.4 to 329.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
106682	333.4 to 336.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
106683	341.5 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
106684	355.8 to 359.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
106685	362.9 to 368.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
106686	372.4 to 382.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
106687	385.4 to 389.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
106652	391.6 to 392.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
106688	395.1 to 398.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
106689	402.3 to 406.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
106726	414.8 to 451.2 feet	Key Note Segment		5 ft	182			
106690	453.1 to 458.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
106691	467.1 to 472.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
106692	472.2 to 475.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
106693	478.8 to 486.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
106694	486.2 to 490.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
106695	494.3 to 507.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
106696	521.1 to 523.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
106697	526.8 to 534.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
106698	537.7 to 540.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
106653	538.2 to 539.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
106699	556.5 to 565.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
106654	557.1 to 558.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
106729	567.3 to 568.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
106700	568.5 to 573.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
106655	568.9 to 569.9 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211623	NOBLE ST	690 NOBLE ST	GILL AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106656	574.0 to 575.0 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375
106701	580.2 to 584.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
106702	589.3 to 592.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
106703	597.2 to 598.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
106704	601.7 to 610.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,220
106657	607.6 to 608.6 feet	Vertical Change	.28"	5 ft	5	REF		
106705	613.9 to 616.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
106706	616.4 to 623.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
106727	630.8 to 659.3 feet	Key Note Segment		5 ft	143			
106658	642.9 to 643.9 feet	Vertical Change	.29"	5 ft	5	REF		
106707	661.3 to 666.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
106708	671.6 to 675.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,460
106709	677.4 to 684.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
106710	688.3 to 691.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
106711	693.3 to 731.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	$22,920
106659	711.7 to 712.7 feet	Vertical Change	.34"	5 ft	5	REF		
106712	736.0 to 749.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,920
106713	752.0 to 758.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
106714	761.7 to 769.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
106715	773.3 to 795.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	$13,080
106660	792.0 to 793.0 feet	Vertical Change	2.36"	5 ft	5	REF		
106728	798.7 to 816.8 feet	Key Note Segment		5 ft	91			
106716	818.3 to 821.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
106661	827.4 to 828.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
106717	830.7 to 842.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
106718	845.1 to 848.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
106719	851.4 to 854.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
106720	861.1 to 865.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211623	NOBLE ST	690 NOBLE ST	GILL AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106662	868.3 to 869.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
106721	871.5 to 882.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
106722	883.8 to 885.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
106723	887.4 to 892.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: W *side of* **NOBLE ST** *Starting at:* **690 NOBLE ST** **$243,969.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011418	NOREEN WAY	1417 NOREEN WAY	1419 NOREEN WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116680	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
116688	2.3 to 20.1 feet	Key Note Segment		4 ft	71			
116681	27.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
116682	38.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
116683	42.6 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
116684	48.5 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
116685	55.1 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
116686	63.3 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
116687	76.9 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **1417 NOREEN WAY** **$14,592.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011422	NOREEN WAY	1421 NOREEN WAY	ASTI WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116716	2.6 to 21.8 feet	Key Note Segment		4 ft	77			
116689	26.4 to 27.4 feet	Vertical Change	.85"	4 ft	4	SF	$75	$300
116696	33.7 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$480
116697	41.3 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	$3,408
116698	54.4 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	$4,752
116699	66.5 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	$3,792
116700	74.6 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	$3,264
116717	81.5 to 101.3 feet	Key Note Segment		4 ft	79			
116701	103.3 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
116718	106.3 to 125.3 feet	Key Note Segment		4 ft	76			
116702	127.3 to 133.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	$3,168
116690	133.5 to 134.5 feet	Vertical Change	.33"	4 ft	4	REF		
116703	136.3 to 144.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	$3,792
116704	148.1 to 156.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	$3,936
116691	149.4 to 150.4 feet	Vertical Change	.75"	4 ft	4	REF		
116705	158.6 to 166.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	33	SF	$120	$3,984
116692	167.6 to 168.6 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
116706	176.2 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,208
116719	184.0 to 204.6 feet	Key Note Segment		4 ft	82			
116720	209.1 to 229.3 feet	Key Note Segment		4 ft	81			
116707	231.3 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	$7,536
116693	238.0 to 239.0 feet	Vertical Change	1.6"	4 ft	4	REF		
116708	252.8 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	$1,680
116709	260.2 to 287.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	108	SF	$120	$12,912
116721	287.6 to 307.8 feet	Key Note Segment		4 ft	81			
116710	309.8 to 311.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	$816
116722	312.5 to 332.7 feet	Key Note Segment		4 ft	81			
116694	312.7 to 313.7 feet	Vertical Change	.4"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011422	NOREEN WAY	1421 NOREEN WAY	ASTI WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116711	334.8 to 341.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,072**
116695	341.3 to 342.3 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
116712	343.3 to 357.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	57	SF	$120	**$6,864**
116713	357.6 to 359.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
116723	363.3 to 383.7 feet	Key Note Segment		4 ft	82			
116714	385.8 to 397.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	**$5,376**
116715	402.5 to 412.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,800**
116724	409.0 to 410.0 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **1421 NOREEN WAY** **$78,039.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011429	NOREEN WAY	1619 NOREEN WAY	LYNN WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116769	4.1 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **1619 NOREEN WAY** **$3,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011417	NOREEN WAY	ASHLAN WAY	1413 NOREEN WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116668	0.0 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
116664	9.1 to 10.1 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**
116669	14.5 to 17.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
116670	18.5 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
116671	22.4 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
116676	25.3 to 43.2 feet	Key Note Segment		4 ft	72			
116672	45.7 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
116673	48.6 to 52.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**
116665	51.0 to 52.0 feet	**Vertical Change**	1.42"	4 ft	4	REF		
116677	52.3 to 69.7 feet	Key Note Segment		4 ft	70			
116674	71.7 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
116666	96.6 to 97.6 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
116675	100.8 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	109	SF	$120	**$13,104**
116679	120.3 to 121.3 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
116667	129.0 to 130.0 feet	**Vertical Change**	-.4"	4 ft	4	LF	$75	**$300**
116678	129.2 to 147.1 feet	Key Note Segment		4 ft	72			

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **ASHLAN WAY** **$24,807.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011338	NOREEN WAY	ASHLAN WAY	RENEE WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116274	1.1 to 11.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,752**
116275	13.3 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,064**
116276	18.8 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,632**
116277	37.7 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	105	SF	$120	**$12,576**
116271	61.5 to 62.5 feet	**Vertical Change**	-.26"	4 ft	4	REF		
116272	65.0 to 66.0 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
116278	69.3 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
116273	73.4 to 74.4 feet	**Vertical Change**	.66"	4 ft	4	REF		
116279	74.2 to 117.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	174	SF	$120	**$20,928**
116280	118.8 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
116281	132.6 to 134.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
116282	137.6 to 144.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,456**
116283	148.1 to 153.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,352**
116284	153.7 to 159.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	24	SF	$120	**$2,880**
116285	158.3 to 159.8 feet		5.0-6.0%	4 ft	6			

TOTAL COST FOR: W *side of* **NOREEN WAY** *Starting at:* **ASHLAN WAY** **$65,244.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011428	NOREEN WAY	ASTI WAY	1619 NOREEN WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116757	7.3 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
116751	13.7 to 14.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
116766	16.8 to 31.3 feet	Key Note Segment		5 ft	73			
116758	36.2 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
116767	42.3 to 56.6 feet	Key Note Segment		5 ft	72			
116759	60.6 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
116752	84.2 to 85.2 feet	**Vertical Change**	1.24"	5 ft	5	SF	$75	**$375**
116760	86.6 to 95.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,220**
116761	96.2 to 97.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
116753	96.4 to 97.4 feet	**Vertical Change**	.7"	5 ft	5	REF		
116762	97.2 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
116754	103.0 to 104.0 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
116756	113.0 to 114.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
116763	116.9 to 118.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
116764	118.9 to 120.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
116768	120.8 to 136.6 feet	Key Note Segment		5 ft	79			
116765	136.6 to 146.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,920**

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **ASTI WAY** **$33,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011400	NOREEN WAY	LUCIA WAY	NICOLA WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116505	6.4 to 7.4 feet	Vertical Change	.31"	4 ft	4	LF	$75	$300
116506	8.9 to 9.9 feet	Vertical Change	-.29"	4 ft	4	LF	$75	$300
116524	10.3 to 29.2 feet	Key Note Segment		4 ft	76			
116507	13.7 to 14.7 feet	Vertical Change	.28"	4 ft	4	REF		
116508	21.7 to 22.7 feet	Vertical Change	-.39"	4 ft	4	REF		
116516	41.2 to 66.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	99	SF	$120	$11,904
116509	63.7 to 64.7 feet	Vertical Change	.34"	4 ft	4	REF		
116525	66.2 to 85.4 feet	Key Note Segment		4 ft	77			
116510	66.9 to 67.9 feet	Vertical Change	-.36"	4 ft	4	REF		
116517	92.2 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,352
116518	97.1 to 105.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	$3,888
116519	105.2 to 108.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	$1,680
116511	108.1 to 109.1 feet	Vertical Change	-.31"	4 ft	4	REF		
116520	112.2 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,160
116526	119.0 to 137.5 feet	Key Note Segment		4 ft	74			
116521	139.1 to 141.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
116512	142.8 to 143.8 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
116528	144.3 to 145.3 feet	Protruding Object	60"	4 ft	4	JOB	$99	$99
116513	145.6 to 146.6 feet	Vertical Change	3.18"	4 ft	4	SF	$75	$300
116527	146.7 to 163.8 feet	Key Note Segment		4 ft	68			
116514	151.0 to 152.0 feet	Vertical Change	.31"	4 ft	4	REF		
116522	165.6 to 189.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	95	SF	$120	$11,376
116515	173.4 to 174.4 feet	Vertical Change	.59"	4 ft	4	REF		
116523	189.8 to 192.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,152

TOTAL COST FOR: S *side of* **NOREEN WAY** *Starting at:* **LUCIA WAY** **$37,011.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011335	NOREEN WAY	LYNN WAY	ASHLAN WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116213	0.9 to 6.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
116214	8.6 to 11.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**
116215	11.2 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
116256	27.7 to 41.7 feet	Key Note Segment		4 ft	56			
116216	43.3 to 56.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,192**
116189	55.4 to 56.4 feet	**Vertical Change**	.4"	4 ft	4	REF		
116217	61.8 to 68.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,360**
116218	69.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
116219	74.3 to 77.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,728**
116220	78.4 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
116257	84.1 to 97.8 feet	Key Note Segment		4 ft	55			
116190	84.4 to 85.4 feet	**Vertical Change**	.26"	4 ft	4	REF		
116221	97.8 to 99.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$320**
116222	111.8 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
116258	114.1 to 127.5 feet	Key Note Segment		4 ft	54			
116191	114.7 to 115.7 feet	**Vertical Change**	.38"	4 ft	4	REF		
116192	128.5 to 129.5 feet	**Vertical Change**	.33"	4 ft	4	REF		
116223	134.4 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
116224	146.3 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	76	SF	$120	**$9,120**
116193	159.3 to 160.3 feet	**Vertical Change**	.3"	4 ft	4	REF		
116225	165.7 to 181.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	**$7,728**
116194	173.8 to 174.8 feet	**Vertical Change**	-.27"	4 ft	4	REF		
116226	186.1 to 190.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,208**
116259	190.7 to 210.9 feet	Key Note Segment		4 ft	81			
116195	191.2 to 192.2 feet	**Vertical Change**	.27"	4 ft	4	REF		
116196	211.3 to 212.3 feet	**Vertical Change**	.31"	4 ft	4	REF		
116227	213.3 to 214.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
116260	215.8 to 235.8 feet	Key Note Segment		4 ft	80			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011335	NOREEN WAY	LYNN WAY	ASHLAN WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116197	236.8 to 237.8 feet	Vertical Change	.32"	4 ft	4	REF		
116228	237.8 to 245.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	$3,888
116198	238.5 to 239.5 feet	Vertical Change	1.62"	4 ft	4	REF		
116229	252.0 to 259.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	31	SF	$120	$3,696
116230	259.9 to 262.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	$1,056
116231	262.1 to 268.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	$2,928
116261	268.9 to 288.8 feet	Key Note Segment		4 ft	80			
116232	292.8 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	94	SF	$120	$11,328
116233	319.4 to 322.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	$1,248
116234	323.3 to 331.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	$3,888
116235	339.9 to 349.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	$4,368
116199	343.3 to 344.3 feet	Vertical Change	-.49"	4 ft	4	REF		
116200	351.9 to 352.9 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
116262	352.1 to 371.9 feet	Key Note Segment		4 ft	79			
116263	375.6 to 396.3 feet	Key Note Segment		4 ft	83			
116202	395.8 to 396.8 feet	Vertical Change	-.34"	4 ft	4	REF		
116236	400.8 to 401.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
116237	404.4 to 417.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	52	SF	$120	$6,192
116238	422.2 to 426.8 feet	Cross Slope (PAR)	12.0-13.0%	4 ft	18	SF	$120	$2,208
116239	426.8 to 429.4 feet	Cross Slope (PAR)	10.0-11.0%	4 ft	10	SF	$120	$1,248
116203	427.5 to 428.5 feet	Vertical Change	-.59"	4 ft	4	REF		
116204	432.5 to 433.5 feet	Vertical Change	.3"	4 ft	4	LF	$75	$300
116240	434.9 to 438.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	14	SF	$120	$1,680
116241	440.2 to 448.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	32	SF	$120	$3,888
116205	450.3 to 451.3 feet	Vertical Change	.58"	4 ft	4	REF		
116242	450.9 to 458.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	$3,696
116206	458.8 to 459.8 feet	Vertical Change	-.28"	4 ft	4	LF	$75	$300
116264	459.1 to 478.1 feet	Key Note Segment		4 ft	76			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011335	NOREEN WAY	LYNN WAY	ASHLAN WAY	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116207	462.2 to 463.2 feet	Vertical Change	.88"	4 ft	4	REF		
116265	483.2 to 502.7 feet	Key Note Segment		4 ft	78			
116243	506.6 to 535.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	117	SF	$120	**$14,016**
116270	526.5 to 527.5 feet	Protruding Object	60"	4 ft	4	JOB	$99	**$99**
116208	536.5 to 537.5 feet	Vertical Change	.26"	4 ft	4	LF	$75	**$300**
116244	537.9 to 557.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	76	SF	$120	**$9,168**
116209	552.0 to 553.0 feet	Vertical Change	.27"	4 ft	4	REF		
116210	557.8 to 558.8 feet	Vertical Change	.28"	4 ft	4	LF	$75	**$300**
116245	559.1 to 565.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,880**
116266	565.3 to 585.8 feet	Key Note Segment		4 ft	82			
116246	587.6 to 588.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
116267	590.7 to 610.1 feet	Key Note Segment		4 ft	78			
116247	612.3 to 616.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,160**
116248	616.8 to 621.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
116249	627.1 to 640.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
116211	638.4 to 639.4 feet	Vertical Change	.27"	4 ft	4	REF		
116250	645.2 to 661.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	65	SF	$120	**$7,824**
116212	665.1 to 666.1 feet	Vertical Change	.26"	4 ft	4	LF	$75	**$300**
116251	668.1 to 672.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
116268	672.7 to 692.8 feet	Key Note Segment		4 ft	80			
116269	696.6 to 716.9 feet	Key Note Segment		4 ft	81			
116252	717.8 to 718.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$480**
116253	719.3 to 728.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	38	SF	$120	**$4,560**
116254	729.3 to 739.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
116255	739.8 to 745.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: W *side of* **NOREEN WAY** *Starting at:* **LYNN WAY** **$157,979.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011408	NOREEN WAY	NICOLA WAY	NOREEN WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116585	3.7 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,344**
116576	9.4 to 10.4 feet	**Vertical Change**	-.35"	4 ft	4	REF		
116577	15.8 to 16.8 feet	**Vertical Change**	-.33"	4 ft	4	REF		
116586	22.9 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
116593	26.7 to 45.8 feet	Key Note Segment		4 ft	76			
116578	27.2 to 28.2 feet	**Vertical Change**	-.35"	4 ft	4	REF		
116579	46.4 to 47.4 feet	**Vertical Change**	.43"	4 ft	4	REF		
116587	51.6 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
116594	53.4 to 70.9 feet	Key Note Segment		4 ft	70			
116580	70.4 to 71.4 feet	**Vertical Change**	-.32"	4 ft	4	REF		
116588	75.0 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
116581	88.7 to 89.7 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
116595	105.6 to 123.8 feet	Key Note Segment		4 ft	73			
116582	123.0 to 124.0 feet	**Vertical Change**	-.3"	4 ft	4	REF		
116597	124.3 to 126.8 feet		5.0-6.0%	4 ft	10			
116598	124.3 to 126.8 feet	Running Slope	5.0-6.0%	4 ft	10	SF	$120	**$1,200**
116589	128.3 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
116590	140.8 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
116596	154.0 to 174.2 feet	Key Note Segment		4 ft	81			
116583	169.9 to 170.9 feet	**Vertical Change**	-.29"	4 ft	4	REF		
116591	175.6 to 177.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
116592	177.7 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,168**

TOTAL COST FOR: S *side of* **NOREEN WAY** *Starting at:* **NICOLA WAY** **$22,908.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011410	NOREEN WAY	NOREEN WAY	ASHLAN WAY	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116611	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
116612	2.9 to 9.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
116626	9.1 to 28.8 feet	Key Note Segment		4 ft	79			
116599	28.5 to 29.5 feet	**Vertical Change**	.58"	4 ft	4	REF		
116613	39.0 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,984**
116614	47.3 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
116600	61.5 to 62.5 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
116627	62.3 to 80.6 feet	Key Note Segment		4 ft	73			
116601	77.1 to 78.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
116615	82.4 to 93.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,376**
116616	94.1 to 98.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
116632	96.1 to 97.1 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
116617	100.3 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
116618	103.9 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
116628	113.0 to 131.4 feet	Key Note Segment		4 ft	74			
116602	114.3 to 115.3 feet	**Vertical Change**	.41"	4 ft	4	REF		
116603	139.0 to 140.0 feet	**Vertical Change**	.45"	4 ft	4	LF	$75	**$300**
116629	140.0 to 158.4 feet	Key Note Segment		4 ft	74			
116619	160.3 to 173.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,384**
116620	177.8 to 181.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,632**
116621	184.3 to 191.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,264**
116622	192.4 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
116604	197.8 to 198.8 feet	**Vertical Change**	.97"	4 ft	4	REF		
116605	199.7 to 200.7 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
116623	202.2 to 215.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	**$6,576**
116630	216.3 to 234.8 feet	Key Note Segment		4 ft	74			
116606	216.6 to 217.6 feet	**Vertical Change**	.26"	4 ft	4	REF		
116631	242.6 to 261.1 feet	Key Note Segment		4 ft	74			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202011410	NOREEN WAY	NOREEN WAY	ASHLAN WAY	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116607	242.8 to 243.8 feet	Vertical Change	.32"	4 ft	4	REF		
116608	262.7 to 263.7 feet	Vertical Change	-.26"	4 ft	4	REF		
116624	263.3 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
116609	271.1 to 272.1 feet	Vertical Change	-.32"	4 ft	4	REF		
116625	277.2 to 289.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	50	SF	$120	**$6,000**
116610	277.9 to 278.9 feet	Vertical Change	-.29"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **NOREEN WAY** *Starting at:* **NOREEN WAY** **$55,047.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011349	NOREEN WAY	NOREEN WAY	LUCIA WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116395	2.8 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	50	SF	$120	**$6,000**
116381	11.4 to 12.4 feet	**Vertical Change**	.3"	4 ft	4	REF		
116396	15.3 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
116397	28.5 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
116413	32.0 to 50.4 feet	Key Note Segment		4 ft	74			
116398	52.5 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
116414	59.2 to 76.7 feet	Key Note Segment		4 ft	70			
116383	76.9 to 77.9 feet	**Vertical Change**	.27"	4 ft	4	REF		
116399	78.8 to 83.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,208**
116400	83.9 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
116384	92.0 to 93.0 feet	**Vertical Change**	-.39"	4 ft	4	LF	$75	**$300**
116401	98.3 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,400**
116385	100.2 to 101.2 feet	**Vertical Change**	.28"	4 ft	4	REF		
116386	106.2 to 107.2 feet	**Vertical Change**	.26"	4 ft	4	REF		
116419	117.4 to 118.4 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
116402	118.7 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	**$13,200**
116387	128.0 to 129.0 feet	**Vertical Change**	-.3"	4 ft	4	REF		
116388	145.9 to 146.9 feet	**Vertical Change**	.26"	4 ft	4	REF		
116415	146.3 to 164.1 feet	Key Note Segment		4 ft	71			
116403	165.4 to 168.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
116404	168.6 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
116389	171.7 to 172.7 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
116416	172.8 to 190.3 feet	Key Note Segment		4 ft	70			
116405	192.3 to 198.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
116390	201.4 to 202.4 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
116391	204.2 to 205.2 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
116406	206.0 to 226.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	82	SF	$120	**$9,792**
116407	228.5 to 233.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011349	NOREEN WAY	NOREEN WAY	LUCIA WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116408	233.2 to 257.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	98	SF	$120	**$11,712**
116392	242.2 to 243.2 feet	**Vertical Change**	.7"	4 ft	4	REF		
116417	259.8 to 278.6 feet	Key Note Segment		4 ft	75			
116418	285.3 to 304.2 feet	Key Note Segment		4 ft	76			
116409	307.0 to 315.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,888**
116393	315.4 to 316.4 feet	**Vertical Change**	-.58"	4 ft	4	SF	$75	**$300**
116410	316.7 to 324.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	32	SF	$120	**$3,888**
116411	324.8 to 328.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	13	SF	$120	**$1,536**
116394	325.5 to 326.5 feet	**Vertical Change**	-.41"	4 ft	4	REF		
116412	330.8 to 336.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,496**

TOTAL COST FOR: N *side of* **NOREEN WAY** *Starting at:* **NOREEN WAY** **$81,663.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011346	NOREEN WAY	RENEE WAY	NOREEN WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116364	0.0 to 2.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	11	SF	$120	**$1,344**
116365	3.9 to 10.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,168**
116360	9.2 to 10.2 feet	**Vertical Change**	.37"	4 ft	4	REF		
116366	10.5 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
116367	11.8 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
116368	19.9 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
116369	29.3 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
116370	44.3 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,920**
116361	61.6 to 62.6 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
116371	65.1 to 76.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	47	SF	$120	**$5,664**
116372	77.8 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
116373	81.8 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
116379	87.7 to 103.7 feet	Key Note Segment		4 ft	64			
116362	103.9 to 104.9 feet	**Vertical Change**	.28"	4 ft	4	REF		
116374	106.9 to 114.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	31	SF	$120	**$3,744**
116375	115.3 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
116363	129.4 to 130.4 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
116376	142.8 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
116377	150.5 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
116378	156.6 to 160.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
116380	159.1 to 160.3 feet		5.0-6.0%	4 ft	5			

TOTAL COST FOR: W *side of* **NOREEN WAY** *Starting at:* **RENEE WAY** **$47,064.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120936	OAK ST	100 OAK ST	S WOLFTRAP ST	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93849	0.0 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
93850	9.8 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
93868	14.4 to 49.5 feet	Key Note Segment		5 ft	176			
93837	14.9 to 15.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
93851	50.3 to 71.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	104	SF	$40	**$4,140**
93838	59.2 to 60.2 feet	**Vertical Change**	.7"	5 ft	5	REF		
93875	67.6 to 68.7 feet		5.0-6.0%	5 ft	6			
93869	71.0 to 91.3 feet	Key Note Segment		5 ft	102			
93839	81.0 to 82.0 feet	**Vertical Change**	.43"	5 ft	5	REF		
93852	91.8 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
93840	101.5 to 102.5 feet	**Vertical Change**	1.7"	5 ft	5	REF		
93870	105.1 to 124.8 feet	Key Note Segment		5 ft	99			
93841	114.7 to 115.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
93842	123.6 to 124.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
93853	126.3 to 143.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
93843	134.2 to 135.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
93854	148.6 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
93855	164.7 to 167.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
93856	167.8 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
93857	176.7 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
93871	185.6 to 205.8 feet	Key Note Segment		5 ft	101			
93844	196.0 to 197.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
93858	207.9 to 215.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
93872	216.5 to 237.4 feet	Key Note Segment		5 ft	105			
93845	226.5 to 227.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
93859	238.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93860	244.8 to 261.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
93861	261.2 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201120936	OAK ST	100 OAK ST	S WOLFTRAP ST	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93862	270.8 to 278.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
93846	271.6 to 272.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
93863	280.0 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
93864	284.1 to 296.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
93873	296.3 to 316.3 feet	Key Note Segment		5 ft	100			
93865	318.2 to 322.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
93874	323.7 to 345.1 feet	Key Note Segment		5 ft	107			
93847	335.0 to 336.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
93866	346.5 to 363.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
93867	365.3 to 369.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
93848	369.3 to 370.3 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **OAK ST** *Starting at:* **100 OAK ST** **$97,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241317	OAK ST	1400 HOWARD RD	1400 HOWARD RD	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107288	3.3 to 7.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
107290	34.8 to 35.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
107289	55.1 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **1400 HOWARD RD** **$3,759.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241318	OAK ST	1400 HOWARD RD	1400 HOWARD RD	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107291	11.5 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
107292	17.4 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **1400 HOWARD RD** **$10,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241319	OAK ST	1400 HOWARD RD	ROTAN AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107293	1.3 to 10.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
107294	11.7 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
107295	12.5 to 13.8 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **1400 HOWARD RD** **$7,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211530	OAK ST	201 PINE ST	CYPRESS ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106398	0.3 to 14.4 feet	Key Note Segment		5 ft	71			
106384	6.8 to 7.8 feet	Vertical Change	.26"	5 ft	5	REF		
106385	16.8 to 17.8 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
106399	17.4 to 32.8 feet	Key Note Segment		5 ft	77			
106386	33.9 to 34.9 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
106389	39.9 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
106390	43.6 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
106400	46.1 to 47.1 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
106391	60.7 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
106387	64.2 to 65.2 feet	Vertical Change	2.02"	5 ft	5	SF	$75	$375
106392	81.0 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
106388	99.0 to 100.0 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
106393	103.1 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
106394	113.8 to 116.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
106395	117.1 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
106396	121.8 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
106397	127.9 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200

TOTAL COST FOR: S *side of* **OAK ST** *Starting at:* **201 PINE ST** **$21,039.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201211518	OAK ST	CYPRESS ST	PINE ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106352	0.5 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	19	SF	$120	$2,280
106353	4.6 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	35	SF	$120	$4,200
106354	8.4 to 13.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	52	SF	$120	$6,240
106355	13.6 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	$1,920
106349	19.6 to 20.6 feet	Vertical Change	.26"	10 ft	10	REF		
106356	20.5 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	108	SF	$120	$12,960
106357	34.1 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	64	SF	$120	$7,680
106358	46.6 to 51.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	48	SF	$120	$5,760
106359	51.4 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	91	SF	$120	$10,920
106360	63.8 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	37	SF	$120	$4,440
106361	70.5 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	148	SF	$120	$17,760
106362	90.5 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	11	SF	$120	$1,320
106363	93.9 to 101.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	76	SF	$120	$9,120
106364	101.9 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	66	SF	$120	$7,920
106365	108.9 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	36	SF	$120	$4,320
106366	116.3 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	18	SF	$120	$2,160
106367	123.0 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	30	SF	$120	$3,600
106350	129.8 to 130.8 feet	Vertical Change	-.3"	10 ft	10	LF	$75	$750
106368	134.9 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	37	SF	$120	$4,440
106369	143.1 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	147	SF	$120	$17,640
106370	160.5 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	123	SF	$120	$14,760
106371	176.2 to 181.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	54	SF	$120	$6,480
106372	191.0 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	$1,680
106373	197.8 to 208.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	105	SF	$120	$12,600
106351	203.4 to 204.4 feet	Vertical Change	.4"	10 ft	10	REF		
106374	208.6 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	22	SF	$120	$2,640
106375	216.6 to 222.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	60	SF	$120	$7,200

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **CYPRESS ST** **$170,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211510	OAK ST	CYPRESS ST	PARK ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106327	0.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	23	SF	$120	**$2,700**
106328	5.8 to 7.7 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	17	SF	$120	**$2,052**
106329	7.7 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	37	SF	$120	**$4,428**
106330	11.8 to 18.0 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	56	SF	$120	**$6,696**
106318	15.5 to 16.5 feet	**Vertical Change**	-.26"	9 ft	9	REF		
106331	20.6 to 24.9 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	39	SF	$120	**$4,644**
106332	28.3 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	85	SF	$120	**$10,260**
106333	41.8 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	99	SF	$120	**$11,880**
106320	49.4 to 50.4 feet	**Vertical Change**	-.31"	9 ft	9	REF		
106334	55.3 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	50	SF	$120	**$5,940**
106321	57.2 to 58.2 feet	**Vertical Change**	.28"	9 ft	9	REF		
106322	63.2 to 64.2 feet	**Vertical Change**	.27"	9 ft	9	LF	$75	**$675**
106335	64.5 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	83	SF	$120	**$9,936**
106336	88.8 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	21	SF	$120	**$2,484**
106343	115.2 to 132.3 feet	Key Note Segment		9 ft	154			
106337	132.6 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	42	SF	$120	**$5,076**
106323	135.1 to 136.1 feet	**Vertical Change**	-.28"	9 ft	9	REF		
106338	138.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	61	SF	$120	**$7,344**
106339	159.3 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	36	SF	$120	**$4,320**
106340	163.3 to 172.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	82	SF	$120	**$9,828**
106344	173.3 to 214.7 feet	Key Note Segment		9 ft	373			
106324	190.4 to 191.4 feet	**Vertical Change**	.28"	9 ft	9	REF		
106341	215.0 to 218.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	30	SF	$40	**$1,188**
106325	228.2 to 229.2 feet	**Vertical Change**	-.47"	9 ft	9	LF	$75	**$675**
106342	241.3 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	77	SF	$120	**$9,180**
106326	249.8 to 250.8 feet	**Vertical Change**	.6"	9 ft	9	REF		

TOTAL COST FOR: S *side of* **OAK ST** *Starting at:* **CYPRESS ST** **$99,306.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120930	OAK ST	MAKENNA DR	85 OAK ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93832	0.0 to 4.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
93833	6.4 to 8.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
93834	11.2 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93831	12.9 to 13.9 feet	**Vertical Change**	.6"	5 ft	5	REF		
93835	16.2 to 61.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	224	SF	$120	**$26,880**
93836	62.0 to 67.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **MAKENNA DR** **$36,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201211523	OAK ST	PINE ST	201 PARK ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106377	0.6 to 22.8 feet	Cross Slope (PAR)	12.0-13.0%	10 ft	222	SF	$120	**$26,640**
106376	14.8 to 15.8 feet	**Vertical Change**	-.26"	10 ft	10	REF		
106378	28.4 to 39.5 feet	Cross Slope (PAR)	7.0-8.0%	10 ft	111	SF	$120	**$13,320**
106379	39.5 to 41.3 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	18	SF	$120	**$2,160**
106380	42.8 to 50.2 feet	Cross Slope (PAR)	6.0-7.0%	10 ft	74	SF	$120	**$8,880**
106381	51.9 to 53.0 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	11	SF	$120	**$1,320**
106382	55.8 to 57.1 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	13	SF	$120	**$1,560**
106383	57.1 to 59.0 feet	Cross Slope (PAR)	6.0-7.0%	10 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: S *side of* **OAK ST** *Starting at:* **PINE ST** **$56,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121059	OAK ST	S WOLFTRAP ST	ST TROPEZ DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94767	1.3 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
94768	4.1 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94769	9.0 to 21.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
94770	24.3 to 31.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
94771	31.1 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
94772	44.1 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
94773	47.9 to 49.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
94774	51.8 to 53.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
94775	53.7 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
94776	63.4 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
94777	69.5 to 71.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
94778	72.6 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
94779	75.7 to 85.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
94780	88.8 to 106.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
94806	106.6 to 128.1 feet	Key Note Segment		5 ft	108			
94781	128.8 to 146.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,620**
94782	147.5 to 151.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
94747	147.8 to 148.8 feet	**Vertical Change**	.71"	5 ft	5	REF		
94783	152.2 to 170.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
94748	159.3 to 160.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
94807	170.8 to 191.4 feet	Key Note Segment		5 ft	103			
94784	192.4 to 196.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
94785	196.2 to 204.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
94786	204.7 to 217.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
94813	213.1 to 214.1 feet		5.0-6.0%	5 ft	5			
94787	217.7 to 222.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
94750	220.4 to 221.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
94788	223.3 to 224.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121059	OAK ST	S WOLFTRAP ST	ST TROPEZ DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94789	227.6 to 231.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
94808	231.7 to 252.3 feet	Key Note Segment		5 ft	103			
94751	233.3 to 234.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
94752	251.9 to 252.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
94790	253.3 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
94791	262.9 to 291.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	**$17,340**
94809	291.8 to 312.5 feet	Key Note Segment		5 ft	104			
94792	314.3 to 320.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
94793	325.9 to 328.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
94810	330.7 to 351.3 feet	Key Note Segment		5 ft	103			
94753	341.3 to 342.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
94754	350.4 to 351.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
94794	352.0 to 353.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94795	353.0 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
94755	354.0 to 355.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
94796	360.8 to 377.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
94756	365.8 to 366.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
94757	375.9 to 376.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
94758	380.3 to 381.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
94797	382.3 to 384.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
94759	384.9 to 385.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
94798	389.3 to 393.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
94760	389.4 to 392.6 feet	**Vertical Change**	3.54"	5 ft	16	REF		
94799	393.3 to 396.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
94761	394.0 to 395.0 feet	**Vertical Change**	2.88"	5 ft	5	REF		
94762	396.2 to 397.2 feet	**Vertical Change**	3.61"	5 ft	5	REF		
94800	396.8 to 406.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
94763	403.5 to 404.5 feet	**Vertical Change**	.61"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121059	OAK ST	S WOLFTRAP ST	ST TROPEZ DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94801	406.8 to 409.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
94802	412.8 to 413.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94811	416.2 to 436.8 feet	Key Note Segment		5 ft	103			
94803	437.0 to 440.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	19	SF	$40	**$740**
94804	440.7 to 454.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
94812	454.7 to 474.8 feet	Key Note Segment		5 ft	101			
94765	455.5 to 456.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
94805	477.3 to 497.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
94766	497.8 to 498.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **OAK ST** *Starting at:* **S WOLFTRAP ST** **$172,505.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120900	OAK ST	ST TROPEZ DR	MAKENNA DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93565	0.0 to 15.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
93578	15.4 to 36.1 feet	Key Note Segment		5 ft	104			
93566	38.2 to 56.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
93557	57.5 to 58.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
93567	57.8 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
93579	69.5 to 90.9 feet	Key Note Segment		5 ft	107			
93558	89.5 to 90.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
93568	91.2 to 98.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
93569	99.3 to 106.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
93580	106.3 to 127.1 feet	Key Note Segment		5 ft	104			
93559	125.7 to 126.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
93570	127.8 to 144.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
93571	145.3 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
93572	149.1 to 156.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
93573	158.9 to 176.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
93560	171.5 to 172.5 feet	**Vertical Change**	-.52"	5 ft	5	REF		
93574	179.5 to 182.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
93581	183.0 to 204.8 feet	Key Note Segment		5 ft	109			
93575	206.5 to 213.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
93582	213.4 to 234.0 feet	Key Note Segment		5 ft	103			
93561	214.5 to 215.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
93562	223.7 to 224.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
93563	230.8 to 231.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93564	233.3 to 234.3 feet	**Vertical Change**	.6"	5 ft	5	REF		
93576	234.5 to 242.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	39	SF	$40	**$1,540**
93577	244.6 to 259.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**

TOTAL COST FOR: N *side of* **OAK ST** *Starting at:* **ST TROPEZ DR** **$74,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211028	OAKRIDGE DR	ALMOND AVE	DEERWOOD DR	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78840	0.2 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
78859	15.5 to 34.4 feet	Key Note Segment		5 ft	95			
78841	35.9 to 38.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
78842	38.8 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
78843	44.4 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
78860	54.8 to 87.0 feet	Key Note Segment		5 ft	161			
78844	91.3 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
78845	104.8 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
78846	108.8 to 111.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
78847	114.0 to 122.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
78861	123.8 to 156.3 feet	Key Note Segment		5 ft	163			
78848	157.3 to 159.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
78849	159.0 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
78850	165.3 to 172.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
78851	172.9 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
78852	176.7 to 184.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
78853	184.8 to 197.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
78862	197.1 to 224.8 feet	Key Note Segment		5 ft	139			
78854	226.3 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
78855	234.7 to 242.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
78856	242.5 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
78863	257.5 to 290.9 feet	Key Note Segment		5 ft	167			
78839	258.8 to 259.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
78857	291.7 to 292.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
78858	292.9 to 294.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: E *side of* **OAKRIDGE DR** *Starting at:* **ALMOND AVE** **$71,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110201433	OAKRIDGE DR	ALMOND AVE	QUADY LN	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76842	5.0 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
76838	25.0 to 26.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
76839	50.7 to 51.7 feet	**Vertical Change**	1.91"	5 ft	5	SF	$75	**$375**
76843	52.6 to 55.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
76844	56.5 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
76840	59.4 to 60.4 feet	**Vertical Change**	1.07"	5 ft	5	REF		
76846	67.4 to 69.7 feet		6.0-7.0%	5 ft	11			
76841	67.8 to 68.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
76845	69.3 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: W *side of* **OAKRIDGE DR** *Starting at:* **ALMOND AVE** **$11,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211025	OAKRIDGE DR	DEERWOOD DR	ALMOND AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78823	0.0 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
78835	10.4 to 42.1 feet	Key Note Segment		5 ft	159			
78824	42.4 to 58.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	79	SF	$40	**$3,160**
78825	58.3 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
78821	65.1 to 66.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
78826	68.5 to 77.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,460**
78836	78.3 to 109.8 feet	Key Note Segment		5 ft	158			
78827	113.1 to 144.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	158	SF	$120	**$18,960**
78828	144.7 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
78837	146.2 to 178.6 feet	Key Note Segment		5 ft	162			
78829	178.8 to 185.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
78830	188.8 to 195.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
78822	193.4 to 194.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
78831	196.5 to 211.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
78832	211.6 to 214.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
78838	214.4 to 246.4 feet	Key Note Segment		5 ft	160			
78833	249.2 to 261.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
78834	261.5 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: W *side of* **OAKRIDGE DR** *Starting at:* **DEERWOOD DR** **$64,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110201431	OAKRIDGE DR	QUADY LN	ALMOND AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76833	0.0 to 1.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
76834	18.7 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
76826	32.1 to 33.1 feet	**Vertical Change**	.62"	5 ft	5	REF		
76835	32.4 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
76827	37.4 to 38.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
76828	40.3 to 41.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
76829	42.0 to 43.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
76830	45.4 to 46.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
76831	48.4 to 49.4 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
76836	49.7 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
76832	52.7 to 53.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
76837	66.7 to 69.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: E *side of* **OAKRIDGE DR** *Starting at:* **QUADY LN** **$18,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105181122	OLIVE AVE	1300 YOSEMITE AVE	CYPRESS ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37226	0.0 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	151	SF	$120	**$18,144**
37227	32.3 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	63	SF	$120	**$7,560**
37228	39.3 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	79	SF	$120	**$9,504**
37225	39.8 to 40.8 feet	**Vertical Change**	.27"	9 ft	9	REF		
37229	85.9 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	58	SF	$120	**$6,912**
37230	93.3 to 100.6 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	66	SF	$120	**$7,884**
37231	100.6 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	16	SF	$120	**$1,944**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **1300 YOSEMITE AVE** **$51,948.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106081441	OLIVE AVE	909 S GATEWAY DR	S GATEWAY DR	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46069	0.0 to 3.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	18	SF	$120	**$2,160**
46089	3.0 to 20.1 feet	Key Note Segment		6 ft	103			
46070	20.1 to 21.3 feet	**Cross Slope (Driveway)**	6.0-7.0%	6 ft	7	SF	$40	**$288**
46071	24.7 to 27.5 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	17	SF	$120	**$2,016**
46072	27.7 to 29.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$1,008**
46073	29.1 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	103	SF	$120	**$12,384**
46074	46.3 to 52.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	35	SF	$120	**$4,248**
46075	52.3 to 56.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
46076	59.0 to 63.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	27	SF	$120	**$3,240**
46077	63.5 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	35	SF	$120	**$4,248**
46078	74.4 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
46079	80.6 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	28	SF	$120	**$3,312**
46080	87.9 to 91.7 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	23	SF	$120	**$2,736**
46090	91.7 to 115.3 feet	Key Note Segment		6 ft	142			
46081	115.3 to 118.4 feet	**Cross Slope (Driveway)**	10.0-11.0%	6 ft	19	SF	$40	**$744**
46082	118.4 to 119.4 feet	Cross Slope (PAR)	8.0-9.0%	6 ft	6	SF	$120	**$720**
46083	120.3 to 130.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	63	SF	$120	**$7,560**
46084	130.8 to 133.7 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	17	SF	$120	**$2,088**
46085	138.0 to 145.7 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	46	SF	$120	**$5,544**
46086	145.7 to 147.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$936**
46087	147.4 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,512**
46088	155.5 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **909 S GATEWAY DR** **$60,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191409	OLIVE AVE	COYOTE LN	STADIUM RD	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39515	9.4 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,528**
39516	16.8 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
39517	21.3 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	498	SF	$120	**$59,760**
39513	97.7 to 98.7 feet	**Vertical Change**	.38"	6 ft	6	REF		
39518	109.0 to 181.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	437	SF	$120	**$52,416**
39519	183.9 to 186.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	18	SF	$120	**$2,160**
39520	187.3 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	282	SF	$120	**$33,840**
39521	240.3 to 271.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	188	SF	$120	**$22,536**
39522	272.1 to 279.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,112**
39523	279.2 to 303.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	148	SF	$120	**$17,712**
39524	304.3 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	299	SF	$120	**$35,928**
39525	360.3 to 364.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
39526	367.3 to 373.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
39527	376.7 to 400.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	145	SF	$120	**$17,424**
39528	403.3 to 425.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	131	SF	$120	**$15,768**
39529	425.3 to 539.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	683	SF	$120	**$81,936**
39530	539.9 to 558.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	110	SF	$120	**$13,176**
39543	559.1 to 600.0 feet	Key Note Segment		6 ft	245			
39514	561.6 to 562.6 feet	**Vertical Change**	-.35"	6 ft	6	REF		
39531	602.5 to 630.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	166	SF	$120	**$19,944**
39532	630.3 to 714.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	504	SF	$120	**$60,480**
39533	714.5 to 724.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	59	SF	$120	**$7,128**
39534	724.6 to 732.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,688**
39535	733.3 to 761.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	166	SF	$120	**$19,944**
39536	764.9 to 780.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	94	SF	$120	**$11,304**
39537	780.6 to 819.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	232	SF	$120	**$27,864**
39538	822.7 to 828.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	32	SF	$120	**$3,816**
39539	830.8 to 852.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	133	SF	$120	**$15,912**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191409	OLIVE AVE	COYOTE LN	STADIUM RD	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39540	853.3 to 854.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
39541	857.9 to 862.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,384**
39542	862.6 to 871.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	52	SF	$120	**$6,192**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **COYOTE LN** **$552,384.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191350	OLIVE AVE	CYPRESS ST	1212 OLIVE AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39474	0.8 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
39475	20.5 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
39476	25.4 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39480	29.4 to 56.8 feet	Key Note Segment		5 ft	137			
39477	57.8 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39481	62.4 to 90.2 feet	Key Note Segment		5 ft	139			
39478	91.5 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
39479	98.9 to 111.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **CYPRESS ST** **$26,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106090917	OLIVE AVE	DON MIGUEL ST	S D ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46666	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
46667	4.7 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
46668	35.2 to 41.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,780**
46664	42.0 to 43.0 feet	**Vertical Change**	.63"	5 ft	5	REF		
46669	42.5 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
46665	48.9 to 49.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
46670	54.3 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
46671	89.2 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
46672	95.9 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
46673	105.2 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **DON MIGUEL ST** **$60,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191623	OLIVE AVE	FREEWAY EXIT	S I ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40041	1.3 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40042	5.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
40043	13.2 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
40044	39.8 to 44.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
40045	45.9 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
40047	54.9 to 76.2 feet	Key Note Segment		5 ft	107			
40046	78.3 to 84.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **FREEWAY EXIT** **$32,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191401	OLIVE AVE	GROVE ST	PARKING LOT ENTRANCE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39494	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
39495	3.8 to 8.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
39496	11.0 to 33.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,260**
39497	35.3 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39498	38.6 to 68.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	**$17,880**
39499	68.8 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39500	78.0 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
39501	82.6 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
39502	86.5 to 89.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
39503	92.3 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
39504	109.5 to 114.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
39493	115.2 to 116.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
39505	118.1 to 135.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
39506	136.4 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
39507	150.3 to 164.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
39508	167.6 to 217.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	247	SF	$120	**$29,640**
39509	220.3 to 236.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,900**
39510	236.8 to 249.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,680**
39511	249.9 to 258.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
39512	259.2 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **GROVE ST** **$149,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131111	OLIVE AVE	KNOX ST	WALLACE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61887	0.6 to 40.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	201	SF	$120	**$24,120**
61888	41.4 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
61889	49.3 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	351	SF	$120	**$42,060**
61890	124.2 to 151.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
61891	151.4 to 160.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
61892	160.5 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
61893	172.3 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
61894	179.4 to 201.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
61895	207.0 to 212.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
61896	215.8 to 217.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61897	227.3 to 230.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
61898	257.4 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
61899	264.5 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
61900	284.0 to 300.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
61901	301.7 to 348.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	233	SF	$120	**$27,960**
61902	348.8 to 360.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
61903	363.3 to 396.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,100**
61904	396.8 to 432.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,240**
61905	435.4 to 449.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
61906	454.0 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
61907	459.8 to 502.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	215	SF	$120	**$25,740**
61908	503.2 to 506.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
61909	506.8 to 515.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
61910	520.6 to 535.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
61911	539.0 to 551.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
61912	554.6 to 556.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
61918	561.6 to 577.9 feet	Key Note Segment		5 ft	82			
61913	589.6 to 593.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131111	OLIVE AVE	KNOX ST	WALLACE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61886	597.0 to 598.0 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
61914	607.2 to 608.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
61915	615.1 to 619.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
61916	635.8 to 640.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
61917	643.1 to 655.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
61919	654.9 to 656.4 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **KNOX ST** **$290,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131056	OLIVE AVE	KNOX ST	TOZER ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61762	0.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
61763	19.4 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
61764	23.9 to 25.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
61765	27.8 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
61766	41.8 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
61767	50.0 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
61768	58.4 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
61769	76.4 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,140**
61770	107.0 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
61771	112.6 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
61772	119.8 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61752	153.4 to 154.4 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
61773	175.7 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
61774	191.4 to 196.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
61775	196.1 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61776	201.3 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
61777	271.0 to 292.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
61753	275.6 to 276.6 feet	**Vertical Change**	3.17"	5 ft	5	REF		
61778	298.3 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61779	303.5 to 324.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,660**
61780	324.6 to 329.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
61781	332.1 to 348.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
61782	365.3 to 374.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
61783	413.1 to 416.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61784	419.7 to 426.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
61785	428.8 to 444.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
61786	455.6 to 471.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
61754	460.7 to 461.7 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131056	OLIVE AVE	KNOX ST	TOZER ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61787	476.8 to 478.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
61788	487.8 to 492.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
61789	516.7 to 531.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
61790	534.4 to 535.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61791	551.7 to 557.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
61792	581.8 to 585.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
61793	587.6 to 589.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
61755	591.5 to 592.5 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
61794	593.3 to 595.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
61795	597.3 to 598.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
61756	597.9 to 598.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
61757	616.8 to 617.8 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
61796	627.1 to 634.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
61797	642.3 to 650.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
61798	652.9 to 658.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
61799	660.3 to 664.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61800	666.8 to 669.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
61801	670.7 to 678.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
61802	681.8 to 697.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
61803	704.8 to 735.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
61804	736.8 to 739.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
61758	737.1 to 738.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
61805	739.1 to 740.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
61806	740.3 to 745.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
61807	745.1 to 750.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
61808	750.2 to 751.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
61809	756.0 to 760.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
61810	763.5 to 796.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	165	SF	$120	**$19,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131056	OLIVE AVE	KNOX ST	TOZER ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61811	800.6 to 815.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
61812	818.8 to 827.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
61813	830.2 to 847.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
61814	854.9 to 889.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
61815	889.7 to 893.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
61816	896.5 to 899.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
61817	900.1 to 908.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
61818	911.3 to 924.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
61759	913.1 to 914.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
61819	926.3 to 965.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,460**
61760	930.6 to 931.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
61761	935.4 to 936.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
61820	969.8 to 972.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61821	975.2 to 993.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
61822	995.8 to 1033.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,740**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **KNOX ST** **$372,825.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191620	OLIVE AVE	MADERA AVE	FREEWAY EXIT	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40033	0.0 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
40034	17.0 to 27.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
40035	27.6 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
40036	36.4 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
40037	54.6 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
40038	62.3 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
40039	70.1 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
40032	77.8 to 78.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
40040	80.3 to 84.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **MADERA AVE** **$31,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131105	OLIVE AVE	MARIPOSA ST	KNOX ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61850	0.7 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
61851	14.3 to 26.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
61852	29.5 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
61853	47.5 to 51.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
61854	51.4 to 55.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
61855	57.4 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61856	67.7 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
61857	87.4 to 97.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
61858	98.1 to 120.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	112	SF	$120	**$13,380**
61859	120.8 to 124.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
61860	124.3 to 128.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,340**
61861	128.2 to 132.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
61862	136.3 to 137.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
61863	140.8 to 147.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
61864	147.8 to 172.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	121	SF	$120	**$14,580**
61865	176.3 to 189.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
61866	192.4 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
61867	220.4 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
61846	240.6 to 241.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
61868	257.1 to 259.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
61869	261.8 to 267.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
61870	267.6 to 272.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
61871	275.2 to 276.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
61872	276.5 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
61847	291.9 to 292.9 feet	**Vertical Change**	.95"	5 ft	5	SF	$75	**$375**
61873	300.3 to 327.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
61848	318.0 to 319.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
61874	330.2 to 333.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131105	OLIVE AVE	MARIPOSA ST	KNOX ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61875	336.3 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61876	342.9 to 356.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
61877	363.3 to 366.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
61878	371.4 to 373.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61879	379.1 to 389.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
61880	391.3 to 436.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	225	SF	$120	**$27,000**
61881	440.0 to 443.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61882	445.8 to 446.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61883	473.3 to 475.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
61884	473.6 to 475.1 feet		5.0-6.0%	5 ft	8			
61849	476.6 to 477.6 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
61885	482.1 to 483.6 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **MARIPOSA ST** **$207,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191434	OLIVE AVE	MARTIN ST	MADERA AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39632	4.2 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
39633	38.9 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	$18,000
39634	73.3 to 74.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
39635	76.4 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,540
39636	90.3 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
39637	98.7 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	$15,960
39638	127.9 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	$12,180
39667	150.8 to 171.4 feet	Key Note Segment		5 ft	103			
39639	173.2 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
39627	175.4 to 176.4 feet	Vertical Change	3.55"	5 ft	5	REF		
39640	177.0 to 204.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	$16,260
39628	181.0 to 184.0 feet	Vertical Change	-.33"	5 ft	15	REF		
39641	206.2 to 208.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
39642	208.7 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
39668	209.8 to 237.7 feet	Key Note Segment		5 ft	140			
39643	237.7 to 270.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	165	SF	$40	$6,600
39644	270.7 to 303.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	165	SF	$120	$19,740
39645	304.7 to 345.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	$24,300
39646	347.4 to 359.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	$7,380
39629	362.8 to 363.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
39647	364.1 to 365.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
39648	392.1 to 400.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
39649	400.0 to 406.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
39650	406.6 to 415.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
39651	417.4 to 425.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,740
39652	426.5 to 427.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
39669	432.5 to 473.1 feet	Key Note Segment		5 ft	203			
39630	469.3 to 470.3 feet	Vertical Change	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191434	OLIVE AVE	MARTIN ST	MADERA AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39653	474.8 to 500.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
39654	503.8 to 512.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
39655	516.8 to 522.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
39631	526.1 to 527.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
39656	528.3 to 536.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
39657	538.9 to 564.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
39658	568.9 to 571.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
39659	576.2 to 577.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39660	581.9 to 598.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
39661	618.0 to 626.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
39662	633.2 to 637.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
39663	644.1 to 647.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39664	651.0 to 667.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
39665	670.5 to 673.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
39666	680.7 to 714.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$20,040**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **MARTIN ST** **$253,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191425	OLIVE AVE	MONTEREY ST	MARTIN ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39604	4.8 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
39605	28.8 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
39606	42.4 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
39622	51.0 to 66.2 feet	Key Note Segment		5 ft	76			
39607	67.4 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,940**
39608	89.5 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
39609	108.6 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39610	111.6 to 116.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
39603	113.6 to 114.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
39623	116.6 to 129.6 feet	Key Note Segment		5 ft	65			
39611	132.2 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39612	140.7 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
39613	149.3 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
39614	155.9 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
39615	158.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39624	161.0 to 174.5 feet	Key Note Segment		5 ft	68			
39616	178.7 to 189.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
39617	189.3 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
39618	194.0 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
39625	214.8 to 229.7 feet	Key Note Segment		5 ft	75			
39619	229.7 to 233.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$740**
39620	236.8 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
39626	246.9 to 275.4 feet	Key Note Segment		5 ft	142			
39621	277.8 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **MONTEREY ST** **$88,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191355	OLIVE AVE	PARK ST	STREET END	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39482	0.0 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
39483	7.8 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
39484	12.7 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,860**
39485	35.8 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
39486	51.6 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
39489	60.1 to 79.2 feet	Key Note Segment		5 ft	96			
39487	79.2 to 98.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	95	SF	$40	**$3,800**
39488	99.5 to 101.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **PARK ST** **$36,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105181120	OLIVE AVE	PINE ST	1300 YOSEMITE AVE	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37219	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	57	SF	$120	**$6,804**
37220	10.9 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	73	SF	$120	**$8,748**
37213	14.2 to 18.0 feet	**Vertical Change**	-.27"	9 ft	34	REF		
37214	20.2 to 23.5 feet	**Vertical Change**	3.33"	9 ft	30	SF	$75	**$2,228**
37215	24.8 to 25.8 feet	**Vertical Change**	2.8"	9 ft	9	SF	$75	**$675**
37221	32.5 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	27	SF	$120	**$3,240**
37216	33.9 to 34.9 feet	**Vertical Change**	2.43"	9 ft	9	REF		
37217	36.1 to 37.1 feet	**Vertical Change**	3.59"	9 ft	9	SF	$75	**$675**
37222	37.9 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	51	SF	$120	**$6,156**
37223	46.4 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	215	SF	$120	**$25,812**
37218	49.9 to 50.9 feet	**Vertical Change**	.27"	9 ft	9	REF		
37224	70.3 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	68	SF	$120	**$8,100**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **PINE ST** **$62,437.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131116	OLIVE AVE	ROOSEVELT AVE	WALLACE AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61930	0.0 to 6.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
61931	8.7 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
61920	10.5 to 11.5 feet	**Vertical Change**	.56"	5 ft	5	REF		
61932	16.5 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
61921	20.0 to 21.0 feet	**Vertical Change**	.6"	5 ft	5	REF		
61933	30.3 to 40.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
61922	43.8 to 44.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
61934	44.1 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
61935	70.4 to 86.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,540**
61936	86.3 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61937	95.3 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
61923	102.7 to 103.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
61938	111.3 to 121.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
61939	122.2 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61940	126.6 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61941	131.0 to 139.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
61942	139.8 to 141.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,140**
61943	142.8 to 149.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
61925	143.9 to 144.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
61944	151.9 to 171.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
61926	152.2 to 153.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
61945	172.0 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
61946	191.8 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
61947	208.6 to 212.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
61948	215.5 to 237.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,020**
61949	237.4 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
61950	241.3 to 248.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
61927	246.5 to 247.5 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131116	OLIVE AVE	ROOSEVELT AVE	WALLACE AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61951	251.0 to 286.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	176	SF	$120	**$21,120**
61952	288.2 to 305.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
61953	308.5 to 313.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
61954	314.7 to 330.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
61955	332.5 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
61956	339.3 to 346.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
61957	347.3 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61928	347.9 to 348.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
61958	351.3 to 354.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
61929	352.2 to 353.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **ROOSEVELT AVE** **$166,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106081435	OLIVE AVE	S G ST	S GATEWAY DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46037	0.0 to 9.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
46038	10.3 to 12.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
46039	17.3 to 61.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	223	SF	$120	**$26,700**
46030	38.9 to 39.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		
46031	58.6 to 59.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
46040	61.8 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
46041	71.1 to 76.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
46042	79.6 to 88.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
46043	88.9 to 98.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
46044	99.1 to 126.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,560**
46045	128.5 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
46046	132.0 to 135.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
46047	141.1 to 146.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
46048	146.5 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
46049	155.3 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,180**
46050	170.6 to 171.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
46066	174.4 to 202.5 feet	Key Note Segment		5 ft	141			
46032	195.9 to 196.9 feet	**Vertical Change**	.76"	5 ft	5	REF		
46033	201.7 to 202.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
46051	203.1 to 237.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	170	SF	$120	**$20,340**
46034	221.6 to 222.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
46052	239.6 to 241.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
46053	241.5 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
46054	252.8 to 260.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
46067	262.4 to 285.1 feet	Key Note Segment		5 ft	114			
46055	285.3 to 291.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,300**
46056	291.8 to 296.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
46057	296.3 to 299.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106081435	OLIVE AVE	S G ST	S GATEWAY DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46068	303.9 to 349.1 feet	Key Note Segment		5 ft	226			
46035	314.9 to 315.9 feet	Vertical Change	.34"	5 ft	5	REF		
46036	319.0 to 320.0 feet	Vertical Change	.28"	5 ft	5	REF		
46058	349.3 to 369.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	101	SF	$40	**$4,020**
46059	370.5 to 381.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
46060	382.6 to 402.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,060**
46061	407.8 to 468.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	303	SF	$120	**$36,360**
46062	471.0 to 473.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
46063	473.0 to 474.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
46064	479.8 to 485.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
46065	487.4 to 510.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **S G ST** **$198,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106081428	OLIVE AVE	S GATEWAY DR	822 S GATEWAY DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46011	0.8 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$900**
46012	5.2 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
46013	10.9 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
46014	18.6 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
46015	34.6 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
46016	48.4 to 49.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
46017	49.9 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
46009	52.7 to 53.7 feet	**Vertical Change**	-.43"	5 ft	5	REF		
46018	53.8 to 56.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
46019	56.4 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
46020	71.4 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
46021	80.3 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
46022	86.0 to 103.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
46023	103.6 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
46024	106.9 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
46025	112.4 to 121.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
46010	119.6 to 120.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
46028	123.0 to 155.3 feet	Key Note Segment		5 ft	162			
46026	155.4 to 159.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$780**
46027	159.3 to 168.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
46029	168.7 to 190.1 feet	Key Note Segment		5 ft	107			

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S GATEWAY DR** **$57,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191309	OLIVE AVE	S I ST	S K ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39206	0.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	36	SF	$120	**$4,320**
39207	8.3 to 15.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	43	SF	$120	**$5,184**
39198	9.8 to 10.8 feet	**Vertical Change**	-.26"	6 ft	6	REF		
39199	16.3 to 17.3 feet	**Vertical Change**	.34"	6 ft	6	LF	$75	**$450**
39208	17.9 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,688**
39209	31.0 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	75	SF	$120	**$9,000**
39210	49.2 to 55.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	35	SF	$120	**$4,248**
39211	57.5 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	95	SF	$120	**$11,376**
39212	77.4 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	105	SF	$120	**$12,600**
39213	95.3 to 100.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	34	SF	$120	**$4,032**
39214	100.9 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
39251	102.3 to 137.6 feet	Key Note Segment		6 ft	212			
39215	138.2 to 140.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	14	SF	$40	**$552**
39216	141.5 to 160.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	112	SF	$120	**$13,464**
39217	161.2 to 162.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
39218	165.1 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	145	SF	$120	**$17,352**
39201	168.3 to 169.3 feet	**Vertical Change**	.29"	6 ft	6	REF		
39202	187.4 to 188.4 feet	**Vertical Change**	.3"	6 ft	6	REF		
39219	189.2 to 193.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	24	SF	$120	**$2,880**
39252	193.4 to 228.5 feet	Key Note Segment		6 ft	211			
39220	229.8 to 251.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	128	SF	$120	**$15,408**
39221	253.9 to 271.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	107	SF	$120	**$12,816**
39222	271.7 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	**$5,832**
39223	280.2 to 289.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	53	SF	$120	**$6,408**
39224	289.1 to 293.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
39225	307.1 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
39226	311.1 to 315.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	28	SF	$120	**$3,312**
39203	317.9 to 318.9 feet	**Vertical Change**	.36"	6 ft	6	LF	$75	**$450**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191309	OLIVE AVE	S I ST	S K ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39227	320.2 to 328.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	49	SF	$120	**$5,832**
39228	328.3 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
39229	333.2 to 337.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
39204	360.5 to 361.5 feet	**Vertical Change**	-.28"	6 ft	6	LF	$75	**$450**
39230	372.3 to 376.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
39231	390.0 to 394.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	27	SF	$120	**$3,240**
39253	394.5 to 426.5 feet	Key Note Segment		6 ft	192			
39232	426.5 to 429.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	16	SF	$40	**$624**
39233	429.8 to 436.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	42	SF	$120	**$5,040**
39205	437.8 to 438.8 feet	**Vertical Change**	.27"	6 ft	6	LF	$75	**$450**
39234	440.5 to 464.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	142	SF	$120	**$17,064**
39235	468.1 to 469.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
39236	472.3 to 480.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
39237	483.9 to 504.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	123	SF	$120	**$14,760**
39238	504.4 to 512.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	48	SF	$120	**$5,760**
39239	522.0 to 525.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	20	SF	$120	**$2,376**
39240	527.4 to 529.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	15	SF	$120	**$1,800**
39241	531.4 to 551.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	118	SF	$120	**$14,184**
39254	551.1 to 582.9 feet	Key Note Segment		6 ft	191			
39242	583.1 to 587.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	28	SF	$40	**$1,128**
39243	588.5 to 593.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
39244	596.3 to 601.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,456**
39245	602.2 to 604.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	16	SF	$120	**$1,872**
39246	605.6 to 608.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	19	SF	$120	**$2,304**
39255	608.8 to 635.1 feet	Key Note Segment		6 ft	158			
39247	635.1 to 636.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	7	SF	$40	**$288**
39248	638.8 to 654.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	95	SF	$120	**$11,448**
39256	665.4 to 686.8 feet	Key Note Segment		6 ft	128			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191309	OLIVE AVE	S I ST	S K ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39249	732.3 to 749.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	101	SF	$120	**$12,096**
39250	749.1 to 775.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	160	SF	$120	**$19,224**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S I ST** **$282,096.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191313	OLIVE AVE	S K ST	S L ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39261	0.3 to 7.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
39262	9.2 to 10.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
39281	11.3 to 40.6 feet	Key Note Segment		5 ft	147			
39263	40.6 to 46.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**
39264	50.4 to 60.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
39265	62.5 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
39266	71.3 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	**$27,960**
39257	118.5 to 119.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
39267	120.9 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39268	128.0 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
39269	134.7 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
39270	140.8 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
39282	161.9 to 188.8 feet	Key Note Segment		5 ft	135			
39258	187.3 to 188.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
39271	189.2 to 212.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	114	SF	$40	**$4,560**
39259	197.4 to 198.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
39272	212.8 to 220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
39273	222.3 to 223.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
39274	224.5 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
39260	260.7 to 261.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
39275	261.8 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
39276	266.2 to 275.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
39277	276.5 to 285.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
39278	287.9 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
39279	330.8 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39280	337.1 to 338.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S K ST** **$117,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191320	OLIVE AVE	S L ST	S N ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39298	0.6 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
39283	4.2 to 5.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
39299	4.2 to 8.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
39300	8.4 to 11.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
39301	13.0 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
39302	19.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39303	29.3 to 33.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
39304	33.9 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
39305	52.0 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
39306	66.8 to 70.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
39284	67.4 to 68.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
39307	71.5 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
39308	90.7 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
39285	93.5 to 94.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
39309	102.0 to 158.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,140**
39286	132.2 to 133.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
39310	159.1 to 166.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
39311	166.6 to 182.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
39312	182.1 to 188.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
39313	193.3 to 194.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
39314	194.6 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
39315	211.9 to 265.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	270	SF	$120	**$32,400**
39287	233.8 to 234.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
39316	266.8 to 294.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
39317	296.4 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
39288	322.7 to 323.7 feet	**Vertical Change**	.51"	5 ft	5	REF		
39289	326.4 to 327.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
39318	327.3 to 338.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191320	OLIVE AVE	S L ST	S N ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39319	343.1 to 375.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
39290	373.5 to 374.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
39320	377.2 to 380.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
39321	385.0 to 388.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39291	386.5 to 387.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
39322	391.7 to 397.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
39323	403.1 to 422.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
39324	427.8 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39325	432.8 to 439.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
39326	446.3 to 463.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
39292	449.7 to 450.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
39293	463.2 to 464.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
39294	469.7 to 470.7 feet	**Vertical Change**	2.65"	5 ft	5	SF	$75	**$375**
39327	471.7 to 497.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
39295	472.5 to 473.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
39296	475.8 to 476.8 feet	**Vertical Change**	-.97"	5 ft	5	REF		
39328	497.6 to 502.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
39329	517.4 to 518.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39330	521.1 to 558.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	189	SF	$120	**$22,680**
39297	549.2 to 550.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
39331	558.9 to 560.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39332	570.8 to 574.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
39347	573.7 to 574.8 feet		5.0-6.0%	5 ft	5			
39348	574.8 to 580.3 feet		6.0-7.0%	5 ft	28			
39333	574.9 to 580.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
39349	576.9 to 580.3 feet	Running Slope	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
39334	586.0 to 590.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
39335	590.5 to 599.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191320	OLIVE AVE	S L ST	S N ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39336	603.4 to 606.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
39337	608.3 to 620.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
39338	624.5 to 633.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
39339	635.7 to 638.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
39340	641.9 to 643.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
39341	645.3 to 652.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
39342	652.6 to 674.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
39343	674.8 to 681.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
39344	681.6 to 709.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
39345	709.7 to 727.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
39346	729.4 to 766.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	185	SF	$120	**$22,200**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S L ST** **$386,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191329	OLIVE AVE	S N ST	S P ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39357	7.3 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	360	SF	$120	**$43,200**
39350	54.8 to 55.8 feet	Vertical Change	.31"	5 ft	5	REF		
39396	79.3 to 101.6 feet	Key Note Segment		5 ft	112			
39351	102.4 to 103.4 feet	Vertical Change	.9"	5 ft	5	REF		
39358	102.5 to 103.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	**$260**
39359	103.8 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
39360	117.6 to 157.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	199	SF	$120	**$23,880**
39397	157.5 to 182.8 feet	Key Note Segment		5 ft	127			
39361	182.8 to 184.2 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	7	SF	$40	**$280**
39352	183.9 to 184.9 feet	Vertical Change	.31"	5 ft	5	REF		
39362	184.9 to 186.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
39363	186.9 to 259.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	365	SF	$120	**$43,800**
39353	189.6 to 190.6 feet	Vertical Change	.27"	5 ft	5	REF		
39364	263.3 to 315.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	263	SF	$120	**$31,560**
39365	319.2 to 332.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
39366	336.1 to 351.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
39354	336.5 to 337.5 feet	Vertical Change	-.33"	5 ft	5	REF		
39367	353.3 to 354.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
39368	356.8 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
39369	367.0 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,160**
39370	413.9 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
39371	435.8 to 471.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**
39372	474.4 to 495.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
39373	498.1 to 509.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
39374	509.9 to 520.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
39375	527.1 to 532.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
39376	532.1 to 540.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
39377	540.8 to 546.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191329	OLIVE AVE	S N ST	S P ST	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39378	548.5 to 554.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
39379	554.8 to 577.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
39380	578.3 to 579.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
39381	582.8 to 587.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
39382	587.4 to 593.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
39355	589.4 to 590.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
39383	593.8 to 601.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
39398	601.8 to 625.0 feet	Key Note Segment		5 ft	116			
39384	625.8 to 632.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
39385	633.3 to 636.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
39386	637.3 to 640.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
39387	640.8 to 652.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
39388	653.5 to 670.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
39389	672.2 to 710.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	190	SF	$120	**$22,800**
39390	710.2 to 740.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
39391	741.0 to 767.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,600**
39392	769.8 to 773.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
39393	776.8 to 792.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
39356	789.2 to 790.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
39394	794.9 to 800.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
39395	800.3 to 803.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S N ST** **$392,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191331	OLIVE AVE	S P ST	SIXTH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39403	0.0 to 22.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
39399	0.7 to 1.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
39400	18.4 to 19.4 feet	**Vertical Change**	1.91"	5 ft	5	REF		
39401	23.0 to 24.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
39404	23.5 to 31.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
39405	31.0 to 33.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
39406	33.8 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
39402	44.7 to 45.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S P ST** **$28,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191347	OLIVE AVE	S Q ST	HOWARD RD	113

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39458	0.0 to 1.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
39455	1.6 to 2.6 feet	**Vertical Change**	.96"	5 ft	5	REF		
39459	10.8 to 11.9 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	6	SF	$120	**$660**
39460	12.4 to 15.2 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	14	SF	$120	**$1,680**
39456	13.1 to 14.1 feet	**Vertical Change**	.99"	5 ft	5	REF		
39473	18.3 to 19.3 feet	**Continuous Width**	30"	5 ft	5	SF	$120	**$600**
39461	19.3 to 42.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
39457	19.9 to 20.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
39471	42.2 to 69.7 feet	Key Note Segment		5 ft	138			
39462	70.3 to 71.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$240**
39463	72.5 to 87.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	77	SF	$120	**$9,240**
39464	88.3 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,700**
39465	112.8 to 116.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
39466	117.7 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
39472	145.8 to 181.5 feet	Key Note Segment		5 ft	178			
39467	182.0 to 196.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	70	SF	$40	**$2,800**
39468	198.2 to 219.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,960**
39469	220.0 to 223.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
39470	224.3 to 227.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **S Q ST** **$80,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191421	OLIVE AVE	SANTA BONITA ST	MONTEREY ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39589	0.2 to 1.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39590	3.9 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
39591	18.4 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
39592	22.6 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
39588	43.9 to 44.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
39593	43.9 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
39594	59.0 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
39595	63.9 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
39596	68.8 to 99.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	154	SF	$120	**$18,420**
39600	100.9 to 126.0 feet	Key Note Segment		5 ft	126			
39597	126.0 to 127.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
39601	127.8 to 151.9 feet	Key Note Segment		5 ft	121			
39598	152.5 to 156.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$820**
39602	158.2 to 187.6 feet	Key Note Segment		5 ft	147			
39599	193.3 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **SANTA BONITA ST** **$45,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191417	OLIVE AVE	SANTA CRUZ ST	SANTA BONITA ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39573	1.5 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
39586	16.3 to 46.7 feet	Key Note Segment		5 ft	152			
39574	46.7 to 47.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
39575	48.6 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
39576	83.3 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
39587	89.9 to 104.3 feet	Key Note Segment		5 ft	72			
39577	105.1 to 107.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
39578	111.3 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
39579	125.3 to 127.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
39580	129.8 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
39581	133.8 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
39582	143.1 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
39583	150.2 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
39584	178.0 to 194.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
39585	196.7 to 199.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **SANTA CRUZ ST** **$66,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191337	OLIVE AVE	SIXTH ST	S Q ST	115

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39415	0.7 to 5.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
39407	3.3 to 4.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
39416	6.5 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
39417	39.2 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
39418	48.8 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
39419	83.9 to 95.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
39408	94.6 to 95.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
39420	95.6 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
39409	124.0 to 125.0 feet	**Vertical Change**	2.82"	5 ft	5	SF	$75	**$375**
39421	125.6 to 132.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
39441	132.6 to 156.5 feet	Key Note Segment		5 ft	120			
39422	157.2 to 172.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
39423	173.1 to 180.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,200**
39424	180.1 to 190.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	50	SF	$120	**$6,000**
39425	190.6 to 200.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	50	SF	$120	**$5,940**
39426	201.1 to 205.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
39427	205.8 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
39428	209.6 to 212.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
39429	212.8 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
39430	230.3 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
39410	231.7 to 232.7 feet	**Vertical Change**	.51"	5 ft	5	REF		
39431	234.0 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
39411	259.6 to 260.6 feet	**Vertical Change**	2.57"	5 ft	5	REF		
39432	263.8 to 271.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
39433	271.8 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
39412	277.6 to 278.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
39442	291.7 to 321.2 feet	Key Note Segment		5 ft	148			
39434	321.3 to 341.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	101	SF	$40	**$4,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191337	OLIVE AVE	SIXTH ST	S Q ST	115

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39435	344.2 to 350.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
39413	344.7 to 345.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
39436	350.7 to 355.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
39437	360.5 to 366.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
39438	366.7 to 371.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
39439	374.3 to 404.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$18,000**
39440	404.3 to 409.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
39414	408.0 to 409.0 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **OLIVE AVE** *Starting at:* **SIXTH ST** **$180,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191414	OLIVE AVE	STADIUM RD	SANTA CRUZ ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39546	0.0 to 1.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
39547	4.2 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
39548	15.4 to 19.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
39544	17.2 to 18.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
39549	19.3 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
39550	27.8 to 30.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
39551	32.8 to 52.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
39552	54.1 to 56.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
39572	57.8 to 75.6 feet	Key Note Segment		5 ft	89			
39553	75.6 to 78.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
39554	78.2 to 90.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
39555	92.3 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
39556	102.3 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
39557	124.5 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,420**
39558	166.0 to 242.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	382	SF	$120	**$45,840**
39559	244.6 to 314.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	351	SF	$120	**$42,120**
39560	318.8 to 340.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
39561	340.5 to 346.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
39562	350.6 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
39563	358.6 to 366.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
39564	366.8 to 368.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
39565	370.3 to 373.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
39566	375.5 to 408.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
39567	410.6 to 427.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
39568	430.1 to 436.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
39569	440.3 to 445.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
39570	449.3 to 464.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
39571	472.2 to 510.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191414	OLIVE AVE	STADIUM RD	SANTA CRUZ ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39545	492.4 to 493.4 feet	Vertical Change	.4"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **STADIUM RD** **$260,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191357	OLIVE AVE	STREET END	GROVE ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39490	0.6 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	360	SF	$120	**$43,140**
39491	72.5 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
39492	78.5 to 102.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **STREET END** **$61,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131101	OLIVE AVE	TOZER ST	MARIPOSA ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61825	1.2 to 2.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
61826	5.2 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
61827	14.0 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	310	SF	$120	**$37,260**
61828	78.6 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61829	89.8 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
61830	117.9 to 163.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	230	SF	$120	**$27,600**
61831	167.8 to 203.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
61832	205.2 to 209.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
61833	212.8 to 242.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
61834	245.9 to 247.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
61835	248.7 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
61836	257.0 to 293.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,900**
61823	294.0 to 295.0 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
61837	296.8 to 301.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
61838	305.8 to 338.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	164	SF	$120	**$19,620**
61839	341.3 to 399.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	291	SF	$120	**$34,860**
61840	400.5 to 411.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
61841	413.7 to 428.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
61842	428.1 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
61843	445.6 to 462.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
61844	463.3 to 469.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
61845	470.8 to 491.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
61824	485.6 to 486.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **TOZER ST** **$260,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105181113	OLIVE AVE	W YOSEMITE AVE	PINE ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37198	2.9 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
37199	15.8 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
37200	20.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
37201	32.2 to 46.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,700**
37202	47.3 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
37203	64.7 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
37204	90.1 to 98.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
37190	94.0 to 95.0 feet	**Vertical Change**	3.55"	5 ft	5	REF		
37205	101.3 to 113.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
37206	115.8 to 119.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
37191	116.6 to 117.6 feet	**Vertical Change**	3.46"	5 ft	5	REF		
37207	119.4 to 123.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
37208	123.2 to 128.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
37192	123.6 to 124.6 feet	**Vertical Change**	2.21"	5 ft	5	REF		
37209	130.2 to 156.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	**$15,780**
37193	141.6 to 142.6 feet	**Vertical Change**	3.45"	5 ft	5	REF		
37194	148.5 to 149.5 feet	**Vertical Change**	3"	5 ft	5	REF		
37195	153.1 to 154.1 feet	**Vertical Change**	2.72"	5 ft	5	REF		
37210	156.5 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
37196	157.5 to 158.5 feet	**Vertical Change**	3.58"	5 ft	5	REF		
37197	164.5 to 165.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
37211	165.4 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: N *side of* **OLIVE AVE** *Starting at:* **W YOSEMITE AVE** **$87,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131128	OLIVE AVE	WALLACE AVE	KNOX ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62044	0.8 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
62045	9.0 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
62046	21.4 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
62047	55.4 to 57.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
62048	57.5 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
62049	61.4 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
62050	80.0 to 82.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
62051	85.2 to 113.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	143	SF	$120	**$17,160**
62052	114.3 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
62053	122.6 to 124.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
62054	125.7 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
62055	134.7 to 141.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
62056	142.1 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
62057	149.3 to 154.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
62058	154.2 to 169.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
62059	169.2 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
62060	178.3 to 209.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
62061	212.1 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
62062	227.3 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62063	231.3 to 233.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
62064	234.3 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
62036	249.7 to 250.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
62065	283.8 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62066	293.1 to 305.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
62037	295.9 to 296.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
62038	306.0 to 307.0 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
62067	309.0 to 313.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	24	SF	$120	**$2,880**
62068	316.1 to 332.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	79	SF	$120	**$9,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131128	OLIVE AVE	WALLACE AVE	KNOX ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62039	331.4 to 332.4 feet	Vertical Change	-.38"	5 ft	5	REF		
62069	332.0 to 346.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	73	SF	$120	**$8,700**
62070	346.8 to 350.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
62071	351.3 to 354.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
62072	355.2 to 362.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
62041	359.5 to 360.5 feet	Vertical Change	-.31"	5 ft	5	REF		
62073	363.7 to 364.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
62074	368.1 to 372.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
62075	374.7 to 385.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
62076	386.8 to 391.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
62077	393.3 to 399.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
62078	399.4 to 410.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
62042	403.6 to 404.6 feet	Vertical Change	.27"	5 ft	5	REF		
62079	410.6 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
62043	412.4 to 413.4 feet	Vertical Change	-.3"	5 ft	5	REF		
62080	428.4 to 432.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
62081	432.8 to 451.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
62082	451.9 to 458.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
62083	458.6 to 466.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
62084	467.1 to 501.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
62085	505.3 to 538.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
62086	541.9 to 544.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
62087	548.2 to 549.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
62088	554.3 to 556.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
62089	556.9 to 570.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,340**
62090	571.8 to 577.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: S *side of* **OLIVE AVE** *Starting at:* **WALLACE AVE** **$282,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221057	ORANGE TREE CT	2775 ORANGE TREE CT	PEACH TREE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81184	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
81185	4.3 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
81176	8.2 to 9.2 feet	**Vertical Change**	-.53"	5 ft	5	REF		
81186	16.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
81193	19.8 to 67.0 feet	Key Note Segment		5 ft	236			
81177	38.1 to 39.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
81178	43.4 to 44.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
81179	54.8 to 55.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
81187	67.2 to 74.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,440**
81188	74.7 to 81.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
81189	84.3 to 90.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
81190	91.9 to 93.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
81194	93.8 to 114.7 feet	Key Note Segment		5 ft	105			
81180	111.0 to 112.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
81191	114.8 to 127.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	62	SF	$40	**$2,480**
81181	122.7 to 123.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
81192	127.8 to 134.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
81182	132.3 to 133.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
81183	134.4 to 135.4 feet	**Vertical Change**	.43"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ORANGE TREE CT** *Starting at:* **2775 ORANGE TREE CT** **$25,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221056	ORANGE TREE CT	PEACH TREE DR	2790 ORANGE TREE CT	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81167	0.0 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
81168	5.2 to 9.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
81169	9.8 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,700**
81170	14.5 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81174	18.3 to 38.3 feet	Key Note Segment		5 ft	100			
81161	38.1 to 39.1 feet	**Vertical Change**	-.53"	5 ft	5	REF		
81171	39.0 to 49.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
81175	50.6 to 72.5 feet	Key Note Segment		5 ft	110			
81162	54.0 to 55.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
81163	71.5 to 72.5 feet	**Vertical Change**	.56"	5 ft	5	REF		
81172	72.7 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
81164	85.3 to 86.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
81173	89.1 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
81165	89.2 to 91.9 feet	**Vertical Change**	.46"	5 ft	14	REF		
81166	97.6 to 98.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **ORANGE TREE CT** *Starting at:* **PEACH TREE DR** **$29,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110922	ORANGE TREE DR	2646 ORANGE TREE DR	TOSCHI DR	14

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89890	0.0 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
89891	17.0 to 18.9 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: S *side of* **ORANGE TREE DR** *Starting at:* **2646 ORANGE TREE DR** **$8,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110921	ORANGE TREE DR	BERRY DR	2660 ORANGE TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89876	8.9 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89877	15.3 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
89886	18.8 to 37.5 feet	Key Note Segment		5 ft	94			
89870	28.5 to 29.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
89871	43.1 to 44.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
89887	44.0 to 63.0 feet	Key Note Segment		5 ft	95			
89878	64.3 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
89872	91.6 to 92.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
89879	101.3 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89873	103.9 to 104.9 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
89888	105.4 to 123.8 feet	Key Note Segment		5 ft	92			
89874	114.6 to 115.6 feet	**Vertical Change**	-.39"	5 ft	5	REF		
89880	127.1 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
89889	130.9 to 149.7 feet	Key Note Segment		5 ft	94			
89881	154.8 to 159.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
89882	161.7 to 163.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
89875	166.8 to 167.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
89883	168.5 to 169.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
89884	171.1 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89885	189.5 to 191.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: S *side of* **ORANGE TREE DR** *Starting at:* **BERRY DR** **$18,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110919	ORANGE TREE DR	TOSCHI DR	BERRY DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89851	1.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
89852	4.4 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
89853	9.8 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
89864	18.0 to 39.8 feet	Key Note Segment		5 ft	109			
89854	40.4 to 44.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	22	SF	$40	**$860**
89865	44.7 to 65.0 feet	Key Note Segment		5 ft	102			
89844	55.3 to 56.3 feet	Vertical Change	.28"	5 ft	5	REF		
89855	72.8 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
89845	78.9 to 79.9 feet	Vertical Change	-.32"	5 ft	5	REF		
89856	104.8 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
89866	106.1 to 124.5 feet	Key Note Segment		5 ft	92			
89846	124.8 to 125.8 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
89857	129.3 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
89867	131.3 to 151.3 feet	Key Note Segment		5 ft	100			
89847	141.3 to 142.3 feet	Vertical Change	.27"	5 ft	5	REF		
89858	157.1 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89859	162.5 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89860	172.5 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
89848	191.6 to 192.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
89868	192.8 to 211.3 feet	Key Note Segment		5 ft	93			
89861	214.3 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
89869	217.5 to 237.9 feet	Key Note Segment		5 ft	102			
89849	218.3 to 219.3 feet	Vertical Change	-.36"	5 ft	5	REF		
89850	227.9 to 228.9 feet	Vertical Change	-.33"	5 ft	5	REF		
89862	238.2 to 246.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
89863	251.6 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: N *side of* **ORANGE TREE DR** *Starting at:* **TOSCHI DR** **$26,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131417	ORCHARD AVE	1790 ORCHARD AVE	UNIVERSITY AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98267	0.0 to 4.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
98258	4.1 to 5.1 feet	**Vertical Change**	-.47"	5 ft	5	REF		
98275	6.6 to 16.8 feet	Key Note Segment		5 ft	51			
98268	17.6 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
98259	18.9 to 19.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
98260	25.6 to 26.6 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
98261	39.4 to 40.4 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
98262	43.0 to 50.3 feet	**Vertical Change**	.28"	5 ft	37	LF	$75	**$2,738**
98269	45.6 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98270	50.4 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
98263	51.0 to 52.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
98264	52.9 to 53.9 feet	**Vertical Change**	.69"	5 ft	5	REF		
98265	55.1 to 56.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
98271	56.6 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
98266	62.4 to 63.4 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
98272	66.3 to 73.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
98273	73.6 to 75.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
98274	77.6 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**

TOTAL COST FOR: E *side of* **ORCHARD AVE** *Starting at:* **1790 ORCHARD AVE** **$25,957.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141039	ORCHARD AVE	FILLMORE AVE	UNIVERSITY AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101000	4.3 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
101001	9.8 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
101002	13.8 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
101003	19.7 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
101004	30.4 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
101005	37.4 to 38.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
101006	42.7 to 44.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
101007	47.8 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
101008	49.2 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
101009	61.8 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
101010	73.8 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
101011	83.5 to 85.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
101021	85.0 to 94.4 feet	Key Note Segment		5 ft	47			
100996	87.0 to 88.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
100997	95.7 to 96.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
101012	95.9 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
101013	101.7 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
101014	108.5 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
101015	114.3 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
100998	128.6 to 129.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
101016	129.3 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
101017	133.1 to 138.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
101018	145.0 to 148.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
101019	148.9 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
101020	152.7 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
100999	156.3 to 157.3 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	$375

TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **FILLMORE AVE** **$41,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141046	ORCHARD AVE	JEFFERSON AVE	W CENTRAL AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101094	0.0 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
101085	12.3 to 13.3 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
101095	47.0 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
101086	53.7 to 54.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
101096	65.5 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
101097	71.3 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
101098	85.3 to 93.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
101087	93.9 to 94.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
101099	95.1 to 96.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
101100	96.8 to 102.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
101088	104.5 to 105.5 feet	**Vertical Change**	-.69"	5 ft	5	REF		
101101	105.5 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
101102	110.4 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
101103	115.6 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
101104	125.0 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
101105	137.2 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
101106	146.1 to 147.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101089	150.0 to 151.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
101107	159.1 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
101090	162.3 to 163.3 feet	**Vertical Change**	3.17"	5 ft	5	REF		
101108	162.8 to 167.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
101091	169.2 to 170.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
101109	173.8 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
101092	180.6 to 181.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
101110	181.0 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
101093	192.6 to 193.6 feet	**Vertical Change**	1.96"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ORCHARD AVE** *Starting at:* **JEFFERSON AVE** **$50,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201141027	ORCHARD AVE	JEFFERSON AVE	FILLMORE AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100768	0.0 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
100769	24.5 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
100770	26.9 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
100771	42.5 to 44.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
100772	46.3 to 47.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
100773	48.3 to 53.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
100774	55.8 to 64.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
100775	65.4 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
100776	81.7 to 82.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
100777	82.9 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
100765	92.3 to 93.3 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
100778	95.5 to 100.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
100779	103.6 to 110.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
100780	117.2 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
100781	125.3 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100766	126.4 to 127.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
100782	131.5 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
100783	151.3 to 153.3 feet		5.0-6.0%	5 ft	10			
100767	154.0 to 155.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **JEFFERSON AVE** **$65,325.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201140955	ORCHARD AVE	RIVERVIEW DR	W CENTRAL AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100339	0.4 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$864**
100340	11.1 to 13.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$720**
100341	14.2 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
100342	20.1 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
100343	28.9 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,224**
100344	35.8 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
100354	44.3 to 59.1 feet	Key Note Segment		3 ft	44			
100338	59.6 to 60.6 feet	**Vertical Change**	-.27"	3 ft	3	LF	$75	**$225**
100345	69.6 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
100346	73.3 to 75.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	6	SF	$120	**$756**
100355	76.8 to 89.8 feet	Key Note Segment		3 ft	39			
100347	89.8 to 97.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	3 ft	22	SF	$40	**$876**
100348	97.7 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
100349	105.6 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,152**
100350	112.7 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
100351	119.4 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**
100352	126.8 to 131.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,692**
100353	135.5 to 139.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **RIVERVIEW DR** **$13,197.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251345	ORCHARD AVE	SUNSET AVE	1803 ORCHARD AVE	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108465	1.8 to 9.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
108466	9.5 to 10.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
108467	10.6 to 23.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,620**
108459	16.3 to 17.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
108460	23.4 to 24.4 feet	**Vertical Change**	3.12"	5 ft	5	SF	$75	**$375**
108468	25.7 to 30.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
108469	33.0 to 58.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,300**
108479	60.3 to 82.0 feet	Key Note Segment		5 ft	109			
108461	62.4 to 63.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
108470	83.7 to 92.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
108471	95.9 to 124.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,400**
108462	134.9 to 135.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
108472	135.9 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
108473	150.5 to 163.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,620**
108474	163.2 to 167.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
108475	182.6 to 192.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
108476	195.5 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
108477	203.1 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
108480	212.6 to 237.1 feet	Key Note Segment		5 ft	123			
108478	241.1 to 253.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
108464	242.5 to 243.5 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ORCHARD AVE** *Starting at:* **SUNSET AVE** **$95,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141043	ORCHARD AVE	UNIVERSITY AVE	JEFFERSON AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101045	8.3 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
101022	8.8 to 9.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
101046	21.9 to 23.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
101047	26.1 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101048	29.4 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
101049	35.8 to 39.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
101050	41.9 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
101023	44.5 to 45.5 feet	**Vertical Change**	-.66"	5 ft	5	REF		
101051	49.0 to 61.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
101052	61.7 to 63.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
101053	64.0 to 67.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
101024	66.2 to 67.2 feet	**Vertical Change**	.81"	5 ft	5	REF		
101054	69.8 to 73.1 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	16	SF	$120	**$1,980**
101025	76.9 to 77.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
101055	82.0 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101056	98.8 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
101026	106.4 to 107.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
101057	140.9 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
101058	148.2 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
101059	152.8 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,100**
101027	157.6 to 158.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
101028	168.4 to 169.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
101029	171.2 to 172.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
101030	174.7 to 175.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
101060	184.3 to 185.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
101061	187.3 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
101084	188.8 to 189.8 feet		5.0-6.0%	5 ft	5			
101031	203.0 to 204.0 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141043	ORCHARD AVE	UNIVERSITY AVE	JEFFERSON AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101062	208.9 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
101063	214.1 to 216.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
101032	215.8 to 216.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
101064	218.9 to 220.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
101033	219.3 to 220.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
101065	228.4 to 231.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
101066	233.7 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
101067	244.5 to 245.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
101068	247.8 to 251.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
101034	249.2 to 250.2 feet	**Vertical Change**	1.81"	5 ft	5	REF		
101069	252.1 to 254.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
101070	257.8 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
101071	261.8 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
101072	268.4 to 272.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
101073	274.7 to 282.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
101074	286.8 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
101075	296.9 to 298.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
101076	299.6 to 306.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
101077	315.6 to 317.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
101035	318.7 to 319.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
101036	320.6 to 321.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
101037	323.3 to 341.0 feet	**Vertical Change**	.31"	5 ft	89	LF	$75	**$6,638**
101078	332.1 to 333.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
101079	336.9 to 341.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
101038	342.3 to 343.3 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
101039	344.3 to 345.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
101040	346.3 to 347.3 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
101080	348.9 to 351.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141043	ORCHARD AVE	UNIVERSITY AVE	JEFFERSON AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101042	356.6 to 357.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
101043	358.7 to 362.2 feet	Vertical Change	.6"	5 ft	18	SF	$75	**$1,313**
101081	359.8 to 361.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
101082	364.6 to 366.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
101044	365.4 to 366.4 feet	Vertical Change	-.4"	5 ft	5	REF		
101083	368.3 to 376.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: E *side of* **ORCHARD AVE** *Starting at:* **UNIVERSITY AVE** **$100,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131415	ORCHARD AVE	UNIVERSITY AVE	1802 ORCHARD AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98252	0.0 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
98257	0.0 to 1.0 feet		5.0-6.0%	5 ft	5			
98253	7.4 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
98254	19.4 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
98249	26.7 to 27.7 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
98255	35.3 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
98250	50.3 to 51.3 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
98256	62.3 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
98251	86.0 to 87.0 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **UNIVERSITY AVE** **$29,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251354	ORCHARD AVE	VENTURI AVE	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108503	0.0 to 12.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
108504	15.4 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,500**
108524	19.0 to 39.6 feet	Key Note Segment		5 ft	103			
108505	40.1 to 51.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
108498	50.5 to 51.5 feet	Vertical Change	.43"	5 ft	5	REF		
108499	54.4 to 55.4 feet	Vertical Change	-.29"	5 ft	5	REF		
108506	55.4 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
108507	62.4 to 65.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
108508	65.4 to 73.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,740**
108509	73.6 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
108525	75.8 to 87.5 feet	Key Note Segment		5 ft	59			
108510	87.7 to 88.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
108511	88.8 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
108512	98.1 to 107.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
108513	110.3 to 120.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
108526	122.0 to 146.6 feet	Key Note Segment		5 ft	123			
108500	138.4 to 139.4 feet	Vertical Change	-.26"	5 ft	5	REF		
108514	147.4 to 148.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
108515	148.5 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
108501	155.7 to 156.7 feet	Vertical Change	-.26"	5 ft	5	REF		
108516	157.1 to 186.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,760**
108517	200.3 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
108518	240.8 to 292.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	260	SF	$120	**$31,140**
108527	294.9 to 318.6 feet	Key Note Segment		5 ft	119			
108519	323.8 to 337.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
108520	341.2 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
108521	353.1 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
108502	353.2 to 354.2 feet	Vertical Change	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251354	ORCHARD AVE	VENTURI AVE	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108522	362.1 to 363.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
108523	368.2 to 384.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
108528	383.6 to 385.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **VENTURI AVE** **$131,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201141055	ORCHARD AVE	W CENTRAL AVE	RIVERVIEW DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101233	0.8 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101234	7.6 to 11.3 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	11	SF	$120	**$1,332**
101235	11.8 to 13.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	6	SF	$120	**$720**
101251	13.4 to 14.4 feet		5.0-6.0%	3 ft	3			
101228	16.4 to 17.4 feet	**Vertical Change**	.78"	3 ft	3	REF		
101236	16.7 to 27.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	33	SF	$120	**$3,960**
101250	29.1 to 43.2 feet	Key Note Segment		3 ft	42			
101229	30.2 to 31.2 feet	**Vertical Change**	.28"	3 ft	3	REF		
101237	43.4 to 44.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	3 ft	4	SF	$40	**$144**
101238	49.4 to 55.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	19	SF	$120	**$2,268**
101230	55.7 to 56.7 feet	**Vertical Change**	-.32"	3 ft	3	REF		
101239	56.8 to 72.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	47	SF	$120	**$5,580**
101240	74.7 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	**$1,296**
101231	79.8 to 80.8 feet	**Vertical Change**	-.28"	3 ft	3	LF	$75	**$225**
101241	81.3 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101242	85.3 to 86.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101232	85.7 to 89.1 feet	**Vertical Change**	-.26"	3 ft	10	REF		
101243	89.3 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101244	91.4 to 94.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$936**
101245	96.3 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	19	SF	$120	**$2,304**
101246	102.7 to 108.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,088**
101247	108.5 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$1,008**
101248	115.3 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,656**
101249	123.7 to 128.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	16	SF	$120	**$1,872**
101252	124.8 to 126.9 feet		5.0-6.0%	3 ft	6			

TOTAL COST FOR: E *side of* **ORCHARD AVE** *Starting at:* **W CENTRAL AVE** **$27,693.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201140957	ORCHARD AVE	W CENTRAL AVE	JEFFERSON AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100369	1.1 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
100370	4.1 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
100356	8.4 to 9.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
100357	18.7 to 19.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
100371	27.8 to 30.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
100372	30.6 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
100373	47.8 to 55.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
100374	65.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
100358	75.1 to 76.1 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
100375	78.8 to 81.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
100359	80.4 to 81.4 feet	**Vertical Change**	3.55"	5 ft	5	REF		
100360	83.3 to 84.3 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
100376	91.0 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
100361	104.5 to 105.5 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
100362	109.5 to 110.5 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
100377	114.8 to 128.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
100382	116.7 to 117.7 feet		6.0-7.0%	5 ft	5			
100378	128.1 to 134.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
100363	135.2 to 136.2 feet	**Vertical Change**	1.87"	5 ft	5	SF	$75	**$375**
100364	162.5 to 163.5 feet	**Vertical Change**	3.49"	5 ft	5	SF	$75	**$375**
100365	174.3 to 175.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
100366	193.6 to 194.6 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
100379	204.0 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
100367	226.0 to 227.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
100380	230.3 to 231.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
100381	231.8 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
100383	237.2 to 238.7 feet		6.0-7.0%	5 ft	8			
100368	238.7 to 239.7 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201140957	ORCHARD AVE	W CENTRAL AVE	JEFFERSON AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: W *side of* **ORCHARD AVE** *Starting at:* **W CENTRAL AVE**								**$52,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181733	ORCHARD HILL DR	BENT OAK TR	COLIMA AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102541	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
102542	27.1 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
102569	31.4 to 51.1 feet	Key Note Segment		5 ft	99			
102543	52.5 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
102570	56.6 to 77.9 feet	Key Note Segment		5 ft	107			
102544	80.9 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
102545	90.2 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
102546	102.5 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
102547	116.9 to 130.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
102527	123.6 to 124.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
102571	130.0 to 149.8 feet	Key Note Segment		5 ft	99			
102548	152.3 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102572	154.8 to 176.5 feet	Key Note Segment		5 ft	108			
102549	177.9 to 181.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
102550	181.2 to 186.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
102551	190.5 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102552	198.7 to 212.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
102528	203.8 to 204.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
102573	216.3 to 246.4 feet	Key Note Segment		5 ft	151			
102529	237.9 to 238.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
102574	250.9 to 272.5 feet	Key Note Segment		5 ft	108			
102530	262.0 to 263.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
102531	280.9 to 281.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
102553	286.0 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102554	291.4 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
102555	298.4 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
102556	311.7 to 312.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102575	314.3 to 343.1 feet	Key Note Segment		5 ft	144			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181733	ORCHARD HILL DR	BENT OAK TR	COLIMA AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102557	348.4 to 349.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102576	349.8 to 369.9 feet	Key Note Segment		5 ft	101			
102532	358.6 to 359.6 feet	**Vertical Change**	.52"	5 ft	5	REF		
102558	371.2 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
102533	377.6 to 378.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
102534	386.8 to 387.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
102559	389.8 to 410.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
102560	410.8 to 412.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
102577	412.5 to 438.8 feet	Key Note Segment		5 ft	132			
102535	430.8 to 431.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
102561	441.8 to 442.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102578	443.6 to 465.7 feet	Key Note Segment		5 ft	111			
102562	496.8 to 500.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
102563	504.3 to 507.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
102579	507.2 to 536.0 feet	Key Note Segment		5 ft	144			
102564	538.4 to 539.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102580	540.1 to 561.3 feet	Key Note Segment		5 ft	106			
102565	562.8 to 563.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102566	577.8 to 582.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
102581	582.7 to 605.3 feet	Key Note Segment		5 ft	113			
102536	594.7 to 595.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
102567	606.8 to 608.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
102568	610.6 to 613.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102537	621.7 to 622.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
102538	631.0 to 632.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
102582	638.9 to 661.6 feet	Key Note Segment		5 ft	114			
102539	639.0 to 640.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
102540	650.5 to 651.5 feet	**Vertical Change**	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201181733	ORCHARD HILL DR	BENT OAK TR	COLIMA AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: N	*side of* **ORCHARD HILL DR**	*Starting at:* **BENT OAK TR**						**$88,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181741	ORCHARD HILL DR	BOLINAS WAY	DIAMANTE LN	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102597	9.3 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
102598	16.5 to 17.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102599	23.9 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
102592	35.7 to 36.7 feet	**Vertical Change**	1.24"	5 ft	5	REF		
102593	39.3 to 40.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
102600	45.8 to 50.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
102594	48.0 to 49.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
102601	51.5 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,460**
102595	83.2 to 84.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
102596	91.6 to 92.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
102602	95.3 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
102603	109.4 to 111.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
102604	113.5 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
102605	118.2 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
102606	123.3 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
102607	137.2 to 143.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
102608	146.3 to 148.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**

TOTAL COST FOR: S *side of* **ORCHARD HILL DR** *Starting at:* **BOLINAS WAY** **$62,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181629	ORCHARD HILL DR	BOLINAS WAY	IVY GLEN DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102246	4.0 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
102252	9.2 to 31.3 feet	Key Note Segment		5 ft	111			
102253	37.7 to 59.2 feet	Key Note Segment		5 ft	107			
102247	74.8 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
102254	95.2 to 114.4 feet	Key Note Segment		5 ft	96			
102248	116.1 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102255	124.5 to 145.8 feet	Key Note Segment		5 ft	107			
102249	146.4 to 155.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	45	SF	$40	**$1,780**
102242	161.8 to 162.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
102243	178.9 to 179.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
102256	183.1 to 203.1 feet	Key Note Segment		5 ft	100			
102244	197.1 to 198.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
102250	205.6 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
102257	209.5 to 231.1 feet	Key Note Segment		5 ft	108			
102251	231.5 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
102245	246.1 to 247.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **ORCHARD HILL DR** *Starting at:* **BOLINAS WAY** **$19,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181737	ORCHARD HILL DR	COLIMA AVE	BOLINAS WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102583	0.0 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,760**
102584	38.4 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
102585	43.2 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,660**
102586	87.2 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
102587	99.3 to 100.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
102588	110.3 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
102589	117.6 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
102590	136.6 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**

TOTAL COST FOR: S *side of* **ORCHARD HILL DR** *Starting at:* **COLIMA AVE** **$60,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201181551	ORCHARD HILL DR	DIAMANTE LN	BENT OAK TR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102076	0.0 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
102070	3.2 to 4.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
102077	16.4 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
102071	20.3 to 21.3 feet	**Vertical Change**	1.71"	5 ft	5	REF		
102078	31.6 to 64.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
102072	54.8 to 55.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
102079	70.4 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
102080	75.6 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
102081	95.1 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
102073	98.9 to 99.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
102082	110.3 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
102074	116.6 to 117.6 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
102083	129.9 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
102075	148.5 to 149.5 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **ORCHARD HILL DR** *Starting at:* **DIAMANTE LN** **$55,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201181615	ORCHARD HILL DR	DIAMANTE LN	IVY GLEN DR	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102181	0.6 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
102193	11.7 to 34.2 feet	Key Note Segment		5 ft	113			
102182	36.2 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
102194	37.6 to 60.6 feet	Key Note Segment		5 ft	115			
102175	37.8 to 38.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
102183	61.1 to 65.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	21	SF	$40	**$840**
102184	68.4 to 70.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
102185	70.6 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
102186	74.6 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
102176	84.8 to 85.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
102187	86.6 to 98.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
102177	93.4 to 94.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
102195	99.2 to 123.2 feet	Key Note Segment		5 ft	120			
102178	111.5 to 112.5 feet	**Vertical Change**	.8"	5 ft	5	REF		
102188	123.2 to 125.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
102196	126.0 to 147.9 feet	Key Note Segment		5 ft	110			
102189	148.3 to 161.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	68	SF	$40	**$2,720**
102190	161.9 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
102179	164.7 to 165.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
102180	181.7 to 182.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
102197	187.2 to 209.7 feet	Key Note Segment		5 ft	113			
102198	213.4 to 235.3 feet	Key Note Segment		5 ft	110			
102191	236.6 to 238.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
102192	245.7 to 249.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: W *side of* **ORCHARD HILL DR** *Starting at:* **DIAMANTE LN** **$43,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191209	ORTEGA DR	KNOX RD	RANCHO MIRAGE RD	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73900	0.1 to 1.1 feet	Vertical Change	-.31"	5 ft	5	LF	$75	**$375**
73901	13.5 to 14.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
73903	15.1 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
73902	24.3 to 29.7 feet	Vertical Change	-.28"	5 ft	27	LF	$75	**$2,025**
73904	27.4 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**

TOTAL COST FOR: S *side of* **ORTEGA DR** *Starting at:* **KNOX RD** **$21,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191207	ORTEGA DR	RANCHO MIRAGE RD	KNOX RD	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73893	0.0 to 6.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
73894	10.0 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
73895	15.5 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
73896	18.1 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
73897	30.0 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
73898	49.3 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
73899	59.8 to 60.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **ORTEGA DR** *Starting at:* **RANCHO MIRAGE RD** **$21,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121024	OSO DR	KNOX ST	MARIPOSA ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59921	0.0 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
59922	33.1 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
59923	38.3 to 57.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
59924	57.2 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
59925	85.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
59945	110.9 to 129.8 feet	Key Note Segment		5 ft	95			
59926	132.7 to 136.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
59946	136.1 to 155.4 feet	Key Note Segment		5 ft	97			
59927	156.3 to 157.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
59928	158.7 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
59915	173.8 to 174.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
59929	190.8 to 194.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
59930	194.4 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
59947	196.8 to 216.0 feet	Key Note Segment		5 ft	96			
59931	217.3 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
59948	222.8 to 241.7 feet	Key Note Segment		5 ft	95			
59932	242.3 to 244.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$420**
59933	246.5 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
59916	258.6 to 259.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
59934	262.7 to 282.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
59949	282.9 to 302.4 feet	Key Note Segment		5 ft	98			
59935	302.9 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
59950	308.8 to 328.4 feet	Key Note Segment		5 ft	98			
59936	329.1 to 337.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
59918	336.5 to 337.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
59937	337.9 to 360.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
59938	361.1 to 367.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
59951	368.4 to 387.9 feet	Key Note Segment		5 ft	98			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121024	OSO DR	KNOX ST	MARIPOSA ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59919	391.0 to 392.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
59939	392.4 to 394.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
59952	394.5 to 414.4 feet	Key Note Segment		5 ft	100			
59940	415.1 to 442.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	$16,260
59941	443.9 to 451.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,260
59920	447.9 to 448.9 feet	Vertical Change	.26"	5 ft	5	REF		
59942	453.3 to 456.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
59953	457.0 to 475.8 feet	Key Note Segment		5 ft	94			
59943	476.8 to 478.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
59944	481.9 to 483.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
59954	483.0 to 509.8 feet	Key Note Segment		5 ft	134			
59955	521.2 to 548.9 feet	Key Note Segment		5 ft	138			

TOTAL COST FOR: S *side of* **OSO DR** *Starting at:* **KNOX ST** **$159,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121019	OSO DR	LOS CERRITOS WAY	KNOX ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59890	0.0 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
59891	11.0 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59892	17.7 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,200**
59893	76.7 to 79.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
59894	81.6 to 86.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
59895	87.4 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
59896	99.9 to 104.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
59897	104.5 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
59909	110.0 to 131.6 feet	Key Note Segment		5 ft	108			
59887	110.2 to 111.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
59888	118.3 to 119.3 feet	**Vertical Change**	.79"	5 ft	5	REF		
59898	132.2 to 135.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
59910	136.6 to 156.7 feet	Key Note Segment		5 ft	100			
59899	157.4 to 174.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	88	SF	$40	**$3,500**
59900	177.0 to 181.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
59901	184.1 to 200.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
59902	201.4 to 202.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59911	202.7 to 223.7 feet	Key Note Segment		5 ft	105			
59903	224.8 to 227.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
59912	228.5 to 250.0 feet	Key Note Segment		5 ft	108			
59904	250.9 to 279.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$17,100**
59905	280.1 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
59906	309.8 to 311.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
59907	312.3 to 314.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
59908	318.1 to 338.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
59889	350.1 to 351.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
59913	362.5 to 363.9 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: S *side of* **OSO DR** *Starting at:* **LOS CERRITOS WAY** **$126,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121002	OSO DR	MARIPOSA ST	LOS CERRITOS WAY	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59684	0.0 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
59740	19.3 to 38.9 feet	Key Note Segment		5 ft	98			
59685	38.9 to 41.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
59667	43.3 to 44.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
59686	43.7 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
59741	45.8 to 65.1 feet	Key Note Segment		5 ft	96			
59687	68.9 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
59688	72.2 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**
59668	73.7 to 74.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
59669	104.8 to 105.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
59742	108.1 to 126.9 feet	Key Note Segment		5 ft	94			
59689	127.7 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
59690	131.6 to 132.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
59670	132.2 to 133.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
59743	133.6 to 153.3 feet	Key Note Segment		5 ft	99			
59671	144.5 to 145.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
59691	154.3 to 157.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
59692	160.4 to 165.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
59672	163.7 to 164.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
59693	165.6 to 194.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,460**
59673	185.8 to 186.8 feet	**Vertical Change**	.69"	5 ft	5	REF		
59744	195.5 to 214.8 feet	Key Note Segment		5 ft	97			
59694	216.6 to 221.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
59745	222.2 to 241.9 feet	Key Note Segment		5 ft	99			
59695	241.9 to 246.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$960**
59696	251.3 to 256.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
59697	256.5 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
59698	274.7 to 282.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121002	OSO DR	MARIPOSA ST	LOS CERRITOS WAY	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59699	282.3 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
59746	284.8 to 302.9 feet	Key Note Segment		5 ft	90			
59674	287.9 to 288.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
59675	294.6 to 295.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
59700	302.9 to 306.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
59747	310.3 to 329.8 feet	Key Note Segment		5 ft	98			
59701	331.0 to 371.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	202	SF	$120	**$24,180**
59676	359.5 to 360.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
59748	372.8 to 392.8 feet	Key Note Segment		5 ft	100			
59702	393.7 to 397.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
59749	398.3 to 418.3 feet	Key Note Segment		5 ft	100			
59703	418.3 to 419.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
59704	419.8 to 431.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
59705	438.3 to 443.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
59706	443.4 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
59707	453.1 to 458.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
59708	458.0 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
59750	459.8 to 480.1 feet	Key Note Segment		5 ft	102			
59709	481.7 to 485.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
59751	485.7 to 505.9 feet	Key Note Segment		5 ft	101			
59710	505.9 to 508.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
59711	508.7 to 512.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
59677	513.2 to 514.2 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
59712	516.3 to 519.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
59713	520.7 to 523.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
59678	526.8 to 527.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
59714	532.1 to 547.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
59752	548.1 to 569.1 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121002	OSO DR	MARIPOSA ST	LOS CERRITOS WAY	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59715	569.1 to 574.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
59753	574.1 to 594.8 feet	Key Note Segment		5 ft	103			
59716	595.1 to 598.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	**$740**
59717	601.9 to 614.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
59718	618.1 to 634.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
59719	634.5 to 637.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
59754	637.2 to 656.8 feet	Key Note Segment		5 ft	98			
59679	646.3 to 647.3 feet	Vertical Change	.29"	5 ft	5	REF		
59755	661.0 to 682.2 feet	Key Note Segment		5 ft	106			
59720	685.6 to 690.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
59721	693.0 to 699.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
59722	702.3 to 704.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
59723	706.2 to 713.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
59724	716.0 to 720.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
59725	720.1 to 724.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59756	724.6 to 744.8 feet	Key Note Segment		5 ft	101			
59680	733.5 to 734.5 feet	Vertical Change	-.29"	5 ft	5	REF		
59726	744.8 to 746.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$300**
59757	749.3 to 769.8 feet	Key Note Segment		5 ft	103			
59727	769.8 to 777.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	38	SF	$40	**$1,500**
59728	777.3 to 780.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
59729	780.3 to 798.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	89	SF	$120	**$10,620**
59730	801.7 to 812.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
59758	812.0 to 831.9 feet	Key Note Segment		5 ft	100			
59731	832.1 to 836.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	20	SF	$40	**$780**
59759	837.1 to 857.3 feet	Key Note Segment		5 ft	101			
59681	848.7 to 849.7 feet	Vertical Change	.3"	5 ft	5	REF		
59682	858.6 to 859.6 feet	Vertical Change	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108121002	OSO DR	MARIPOSA ST	LOS CERRITOS WAY	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59732	858.6 to 884.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,300**
59733	887.1 to 891.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
59734	891.0 to 901.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	51	SF	$120	**$6,120**
59735	901.2 to 904.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
59683	904.9 to 905.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
59760	905.4 to 926.2 feet	Key Note Segment		5 ft	104			
59736	926.2 to 928.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
59737	930.4 to 931.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
59761	932.5 to 953.0 feet	Key Note Segment		5 ft	103			
59738	955.7 to 958.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
59739	958.3 to 964.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: N *side of* **OSO DR** *Starting at:* **MARIPOSA ST** **$241,905.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091514	OWENS ST	1116 OWENS ST	W CLEVELAND AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54992	0.0 to 3.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
55007	6.0 to 20.6 feet	Key Note Segment		5 ft	73			
54986	20.9 to 21.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
54993	32.8 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
54994	53.5 to 56.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
54995	57.0 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
55008	85.5 to 100.9 feet	Key Note Segment		5 ft	77			
54996	100.9 to 109.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,720**
54997	110.3 to 111.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
55009	111.8 to 126.3 feet	Key Note Segment		5 ft	73			
54998	126.3 to 128.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
54999	130.7 to 147.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
55000	147.7 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
55001	153.4 to 164.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
54987	157.9 to 158.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
55002	174.2 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
55003	182.1 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
55010	190.5 to 204.8 feet	Key Note Segment		5 ft	72			
54988	205.8 to 206.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
54989	210.7 to 211.7 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
55011	216.8 to 231.0 feet	Key Note Segment		5 ft	71			
55004	231.0 to 233.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
55005	238.3 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
54990	244.0 to 245.0 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
55006	249.8 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
54991	250.5 to 251.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
55012	254.3 to 256.1 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **OWENS ST** *Starting at:* **1116 OWENS ST** **$65,665.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031013	OWENS ST	301 HARDING AVE	HARDING AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119413	0.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
119414	3.3 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
119423	6.7 to 7.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119415	11.1 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
119416	15.2 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
119417	18.7 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
119418	32.5 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
119419	41.9 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
119420	53.7 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
119421	60.2 to 97.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
119422	100.2 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: W *side of* **OWENS ST** *Starting at:* **301 HARDING AVE** **$42,939.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091520	OWENS ST	E CLEVELAND AVE	W SHERWOOD WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55033	1.8 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
55034	13.5 to 16.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
55035	19.0 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
55036	24.8 to 26.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
55081	27.8 to 42.3 feet	Key Note Segment		5 ft	73			
55037	44.3 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
55038	47.4 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
55013	48.3 to 49.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
55014	52.2 to 53.2 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
55082	54.0 to 67.4 feet	Key Note Segment		5 ft	67			
55015	56.4 to 57.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
55039	67.4 to 98.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	157	SF	$40	**$6,280**
55016	67.8 to 68.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
55017	90.2 to 91.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
55096	93.3 to 94.5 feet		6.0-7.0%	5 ft	6			
55018	100.9 to 101.9 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
55040	104.9 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
55041	116.1 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
55042	123.0 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55043	127.4 to 130.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55019	127.9 to 128.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
55083	133.1 to 147.4 feet	Key Note Segment		5 ft	72			
55044	147.4 to 149.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
55045	152.9 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
55084	159.1 to 172.2 feet	Key Note Segment		5 ft	66			
55046	176.7 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
55047	211.5 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
55048	233.4 to 237.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091520	OWENS ST	E CLEVELAND AVE	W SHERWOOD WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55085	237.4 to 252.6 feet	Key Note Segment		5 ft	76			
55049	252.6 to 255.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	16	SF	$40	**$640**
55020	258.2 to 259.2 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$375**
55050	259.3 to 261.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
55086	263.9 to 277.5 feet	Key Note Segment		5 ft	68			
55051	277.5 to 280.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	**$620**
55052	281.3 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55021	297.0 to 298.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
55053	305.5 to 310.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
55054	315.3 to 320.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55055	340.8 to 342.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
55087	343.0 to 359.3 feet	Key Note Segment		5 ft	82			
55022	343.5 to 344.5 feet	Vertical Change	.31"	5 ft	5	REF		
55023	357.4 to 358.4 feet	Vertical Change	.43"	5 ft	5	REF		
55024	363.6 to 364.6 feet	Vertical Change	1.89"	5 ft	5	REF		
55056	364.6 to 367.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
55088	368.0 to 382.3 feet	Key Note Segment		5 ft	72			
55057	383.8 to 385.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
55058	389.2 to 390.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
55059	393.2 to 405.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
55060	417.3 to 429.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
55061	433.8 to 442.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
55062	446.7 to 447.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
55089	447.8 to 464.5 feet	Key Note Segment		5 ft	84			
55026	449.0 to 450.0 feet	Vertical Change	-.27"	5 ft	5	REF		
55027	462.9 to 463.9 feet	Vertical Change	-.32"	5 ft	5	REF		
55063	464.5 to 472.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	41	SF	$40	**$1,620**
55090	473.0 to 488.0 feet	Key Note Segment		5 ft	75			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091520	OWENS ST	E CLEVELAND AVE	W SHERWOOD WAY	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55028	474.0 to 475.0 feet	Vertical Change	-.27"	5 ft	5	REF		
55064	488.0 to 491.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	19	SF	$40	**$760**
55065	492.4 to 495.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
55091	525.3 to 540.4 feet	Key Note Segment		5 ft	76			
55066	543.6 to 548.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
55067	551.3 to 553.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
55029	572.6 to 573.6 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
55030	589.4 to 590.4 feet	Vertical Change	-.28"	5 ft	5	REF		
55068	590.3 to 605.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
55092	605.1 to 619.5 feet	Key Note Segment		5 ft	72			
55069	626.8 to 630.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
55093	631.0 to 644.9 feet	Key Note Segment		5 ft	70			
55070	644.9 to 646.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$380**
55071	649.8 to 651.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55031	660.7 to 661.7 feet	Vertical Change	-.38"	5 ft	5	LF	$75	**$375**
55072	670.2 to 671.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55032	679.2 to 680.2 feet	Vertical Change	.51"	5 ft	5	SF	$75	**$375**
55073	682.5 to 686.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
55074	688.7 to 690.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
55075	690.7 to 693.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
55076	706.3 to 707.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55094	710.3 to 724.8 feet	Key Note Segment		5 ft	73			
55077	724.8 to 727.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	16	SF	$40	**$620**
55095	735.8 to 749.3 feet	Key Note Segment		5 ft	68			
55078	754.3 to 758.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
55079	760.8 to 764.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
55080	767.6 to 771.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: E *side of* **OWENS ST** *Starting at:* **E CLEVELAND AVE** **$130,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031020	OWENS ST	SHARON BVD	WILSON AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119438	0.7 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
119428	5.2 to 6.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
119439	9.0 to 15.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
119429	11.8 to 14.8 feet	**Vertical Change**	.3"	5 ft	15	REF		
119440	17.4 to 23.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
119441	23.3 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
119430	24.8 to 27.9 feet	**Vertical Change**	.26"	5 ft	16	REF		
119442	52.3 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
119443	63.8 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	338	SF	$120	**$40,500**
119431	77.0 to 78.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
119444	136.5 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
119445	150.0 to 168.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
119432	157.8 to 158.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
119446	172.3 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
119447	177.8 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119433	183.9 to 184.9 feet	**Vertical Change**	-.7"	5 ft	5	SF	$75	**$375**
119448	198.2 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
119449	204.6 to 207.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
119450	210.7 to 212.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
119451	219.2 to 220.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119452	220.2 to 231.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
119434	236.3 to 237.3 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
119453	242.0 to 243.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
119454	253.2 to 275.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
119435	262.5 to 263.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
119455	278.4 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
119456	285.2 to 301.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
119457	303.5 to 313.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031020	OWENS ST	SHARON BVD	WILSON AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119458	315.4 to 316.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119436	315.5 to 316.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
119471	316.9 to 331.0 feet	Key Note Segment		5 ft	71			
119459	331.3 to 332.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
119460	333.6 to 338.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
119472	339.2 to 360.6 feet	Key Note Segment		5 ft	107			
119461	361.4 to 364.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	14	SF	$40	**$540**
119462	364.1 to 365.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
119463	368.8 to 397.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,460**
119464	401.3 to 408.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
119437	406.6 to 407.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
119465	408.0 to 409.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
119473	411.3 to 425.9 feet	Key Note Segment		5 ft	73			
119466	427.8 to 429.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
119467	429.4 to 442.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
119468	443.1 to 452.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
119469	452.5 to 459.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
119470	459.6 to 462.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: E *side of* **OWENS ST** *Starting at:* **SHARON BVD** **$177,830.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202011102	OWENS ST	W CLARK ST	314 OWENS ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115923	0.0 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,820**
115924	10.0 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
115925	23.4 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
115926	28.3 to 50.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,560**
115927	53.1 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
115914	54.9 to 55.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
115928	68.3 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
115915	80.7 to 81.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
115916	106.6 to 107.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
115929	112.3 to 118.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
115930	118.8 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
115917	132.5 to 133.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
115931	138.3 to 148.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
115932	151.6 to 154.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
115933	155.8 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	267	SF	$120	**$32,100**
115934	209.3 to 212.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
115918	210.0 to 211.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
115935	213.5 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
115936	235.3 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
115937	250.3 to 256.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
115919	258.0 to 259.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
115938	258.1 to 314.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	282	SF	$120	**$33,840**
115920	283.9 to 284.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
115921	309.8 to 310.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
115922	311.6 to 312.6 feet	**Vertical Change**	.83"	5 ft	5	REF		
115939	317.1 to 339.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,260**

TOTAL COST FOR: W *side of* **OWENS ST** *Starting at:* **W CLARK ST** **$180,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091511	OWENS ST	W SHERWOOD WAY	1120 OWENS ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54950	0.0 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
54951	12.6 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
54935	13.3 to 14.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
54952	24.8 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
54976	30.9 to 45.7 feet	Key Note Segment		5 ft	74			
54953	45.7 to 61.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	78	SF	$40	**$3,120**
54954	64.2 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**
54977	82.3 to 97.3 feet	Key Note Segment		5 ft	75			
54936	82.7 to 83.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
54955	97.3 to 99.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
54937	105.0 to 106.0 feet	**Vertical Change**	1.05"	5 ft	5	SF	$75	**$375**
54956	109.3 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
54957	131.1 to 135.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
54938	134.8 to 135.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
54978	135.9 to 150.6 feet	Key Note Segment		5 ft	74			
54958	151.2 to 160.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	47	SF	$40	**$1,880**
54979	161.0 to 175.3 feet	Key Note Segment		5 ft	72			
54959	175.3 to 200.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	126	SF	$40	**$5,020**
54960	209.1 to 219.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
54961	223.3 to 225.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
54962	227.2 to 228.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
54939	232.3 to 233.3 feet	**Vertical Change**	1.44"	5 ft	5	SF	$75	**$375**
54980	241.2 to 254.8 feet	Key Note Segment		5 ft	68			
54963	254.8 to 258.5 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	19	SF	$40	**$740**
54964	258.5 to 259.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
54965	262.7 to 267.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
54981	267.3 to 280.8 feet	Key Note Segment		5 ft	68			
54966	285.6 to 292.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091511	OWENS ST	W SHERWOOD WAY	1120 OWENS ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54967	308.6 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
54982	319.3 to 333.0 feet	Key Note Segment		5 ft	69			
54968	333.0 to 336.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
54969	348.1 to 349.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
54970	353.1 to 376.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
54940	373.8 to 374.8 feet	**Vertical Change**	.97"	5 ft	5	REF		
54971	381.6 to 382.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
54972	383.6 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
54941	384.5 to 388.0 feet	**Vertical Change**	-.28"	5 ft	18	REF		
54942	388.7 to 389.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
54983	398.8 to 413.7 feet	Key Note Segment		5 ft	75			
54943	399.6 to 400.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
54944	413.3 to 414.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
54973	413.7 to 421.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,520**
54946	420.5 to 421.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
54984	423.9 to 438.5 feet	Key Note Segment		5 ft	73			
54947	424.8 to 425.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
54948	431.6 to 432.6 feet	**Vertical Change**	1.52"	5 ft	5	REF		
54974	442.9 to 459.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
54975	461.8 to 483.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
54949	483.3 to 484.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
54985	504.1 to 522.2 feet	Key Note Segment		5 ft	91			

TOTAL COST FOR: W *side of* **OWENS ST** *Starting at:* **W SHERWOOD WAY** **$120,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202030957	OWENS ST	WILSON AVE	E CLEVELAND AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119360	1.1 to 7.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,540**
119349	7.4 to 8.4 feet	Vertical Change	.51"	5 ft	5	REF		
119361	7.6 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
119350	13.9 to 14.9 feet	Vertical Change	.4"	5 ft	5	REF		
119362	18.8 to 22.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
119363	22.3 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
119351	24.7 to 25.7 feet	Vertical Change	-.41"	5 ft	5	REF		
119364	27.8 to 32.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,700**
119352	33.2 to 34.2 feet	Vertical Change	.33"	5 ft	5	REF		
119365	34.0 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119382	37.0 to 38.0 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
119353	39.8 to 40.8 feet	Vertical Change	.26"	5 ft	5	REF		
119366	40.2 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119367	41.5 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119368	45.2 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
119369	53.3 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
119370	62.6 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
119354	62.8 to 63.8 feet	Vertical Change	-.48"	5 ft	5	REF		
119355	67.8 to 68.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
119383	72.5 to 73.5 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
119371	72.9 to 75.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
119372	77.8 to 84.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
119373	84.1 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
119374	94.2 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
119381	98.4 to 116.4 feet	Key Note Segment		5 ft	90			
119375	116.4 to 125.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	43	SF	$40	**$1,720**
119376	125.0 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
119356	133.6 to 134.6 feet	Vertical Change	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202030957	OWENS ST	WILSON AVE	E CLEVELAND AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119377	155.0 to 166.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
119357	166.7 to 167.7 feet	**Vertical Change**	3.4"	5 ft	5	REF		
119358	186.0 to 187.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
119378	197.2 to 199.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
119379	200.3 to 206.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
119359	202.9 to 203.9 feet	**Vertical Change**	-.63"	5 ft	5	REF		
119380	208.1 to 209.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **OWENS ST** *Starting at:* **WILSON AVE** **$68,308.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121431	PACIFIC CT	MAINBERRY DR	MAINBERRY DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96439	0.0 to 18.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
96478	19.3 to 38.4 feet	Key Note Segment		5 ft	96			
96440	40.1 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
96479	44.7 to 66.3 feet	Key Note Segment		5 ft	108			
96441	67.8 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
96420	82.7 to 83.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
96442	100.6 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
96480	124.7 to 143.6 feet	Key Note Segment		5 ft	95			
96443	153.4 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
96481	156.4 to 175.2 feet	Key Note Segment		5 ft	94			
96421	175.5 to 176.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
96444	176.2 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,960**
96422	198.5 to 199.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
96445	200.6 to 209.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
96482	209.9 to 229.1 feet	Key Note Segment		5 ft	96			
96446	229.8 to 237.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
96447	237.1 to 248.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
96423	250.2 to 251.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
96448	251.3 to 255.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
96449	255.6 to 258.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
96450	258.5 to 260.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
96451	260.0 to 265.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
96424	262.7 to 263.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
96425	264.4 to 265.4 feet	**Vertical Change**	.81"	5 ft	5	REF		
96483	265.5 to 284.8 feet	Key Note Segment		5 ft	97			
96493	284.8 to 286.3 feet		5.0-6.0%	5 ft	8			
96452	286.8 to 295.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
96453	297.8 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121431	PACIFIC CT	MAINBERRY DR	MAINBERRY DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96484	299.8 to 321.5 feet	Key Note Segment		5 ft	109			
96426	310.6 to 311.6 feet	Vertical Change	.26"	5 ft	5	REF		
96454	322.7 to 327.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
96485	334.3 to 353.8 feet	Key Note Segment		5 ft	98			
96427	335.4 to 336.4 feet	Vertical Change	.59"	5 ft	5	REF		
96455	357.7 to 366.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
96486	366.8 to 387.0 feet	Key Note Segment		5 ft	101			
96428	387.6 to 388.6 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
96456	396.3 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
96457	406.0 to 407.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
96487	407.7 to 428.3 feet	Key Note Segment		5 ft	103			
96458	436.4 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
96459	444.0 to 456.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
96429	446.4 to 447.4 feet	Vertical Change	-.29"	5 ft	5	REF		
96430	451.2 to 452.2 feet	Vertical Change	.39"	5 ft	5	REF		
96460	459.8 to 461.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	$1,020
96461	463.6 to 466.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,920
96488	467.5 to 487.1 feet	Key Note Segment		5 ft	98			
96462	488.0 to 494.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
96431	497.2 to 498.2 feet	Vertical Change	-.3"	5 ft	5	REF		
96463	497.7 to 500.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,860
96489	500.8 to 521.1 feet	Key Note Segment		5 ft	102			
96432	512.2 to 513.2 feet	Vertical Change	.35"	5 ft	5	REF		
96464	522.7 to 530.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,800
96465	531.6 to 537.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
96466	540.3 to 545.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
96467	546.6 to 550.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
96490	550.8 to 572.0 feet	Key Note Segment		5 ft	106			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121431	PACIFIC CT	MAINBERRY DR	MAINBERRY DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96433	561.8 to 562.8 feet	Vertical Change	.27"	5 ft	5	REF		
96468	574.3 to 577.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
96469	577.6 to 579.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
96470	580.3 to 581.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96471	583.8 to 594.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
96434	585.8 to 586.8 feet	Vertical Change	.43"	5 ft	5	REF		
96472	597.7 to 604.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
96435	600.4 to 601.4 feet	Vertical Change	-.39"	5 ft	5	REF		
96473	610.9 to 613.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
96474	618.8 to 628.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
96491	628.7 to 648.0 feet	Key Note Segment		5 ft	96			
96475	649.8 to 651.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
96476	651.3 to 655.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
96492	657.1 to 676.3 feet	Key Note Segment		5 ft	96			
96437	667.6 to 668.6 feet	Vertical Change	.3"	5 ft	5	REF		
96438	677.1 to 678.1 feet	Vertical Change	.38"	5 ft	5	REF		
96477	677.5 to 699.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**

TOTAL COST FOR: S/E/N *side of* **PACIFIC CT** *Starting at:* **MAINBERRY DR** **$179,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131140	PADRE ST	DRAKE ST	SOLANO ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62145	9.2 to 35.9 feet	Key Note Segment		5 ft	134			
62120	10.0 to 11.0 feet	Vertical Change	-.31"	5 ft	5	REF		
62121	16.2 to 17.2 feet	Vertical Change	.32"	5 ft	5	REF		
62130	35.9 to 37.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	$380
62122	45.6 to 46.6 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
62131	54.7 to 57.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
62146	57.5 to 83.3 feet	Key Note Segment		5 ft	129			
62123	70.1 to 71.1 feet	Vertical Change	.29"	5 ft	5	REF		
62132	83.3 to 84.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$240
62147	85.4 to 109.6 feet	Key Note Segment		5 ft	121			
62124	107.8 to 108.8 feet	Vertical Change	-.3"	5 ft	5	REF		
62133	109.6 to 110.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$240
62126	136.1 to 137.1 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
62134	144.5 to 147.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
62148	147.4 to 168.7 feet	Key Note Segment		5 ft	107			
62135	169.5 to 171.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
62149	172.4 to 195.0 feet	Key Note Segment		5 ft	113			
62136	211.3 to 217.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
62150	232.3 to 254.8 feet	Key Note Segment		5 ft	113			
62137	254.8 to 258.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$720
62151	259.2 to 280.6 feet	Key Note Segment		5 ft	107			
62127	269.9 to 270.9 feet	Vertical Change	.37"	5 ft	5	REF		
62138	283.4 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
62139	292.6 to 293.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
62140	295.9 to 300.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
62152	302.4 to 324.1 feet	Key Note Segment		5 ft	109			
62141	324.1 to 330.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	$1,180
62142	333.8 to 342.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131140	PADRE ST	DRAKE ST	SOLANO ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62128	334.7 to 335.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
62143	346.1 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
62144	354.6 to 363.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
62153	368.4 to 392.8 feet	Key Note Segment		5 ft	122			
62129	369.3 to 370.3 feet	**Vertical Change**	-.47"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PADRE ST** *Starting at:* **DRAKE ST** **$31,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131151	PADRE ST	PEERLESS ST	DRAKE ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62238	0.8 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
62239	15.0 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
62240	42.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
62241	56.8 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
62242	74.6 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
62237	89.9 to 90.9 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
62243	98.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
62244	100.0 to 101.1 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **PADRE ST** *Starting at:* **PEERLESS ST** **$37,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131142	PADRE ST	SOLANO ST	PEERLESS ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62156	0.0 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
62157	10.0 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62158	18.8 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
62154	25.6 to 26.6 feet	**Vertical Change**	-.47"	5 ft	5	REF		
62159	25.8 to 30.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
62160	30.8 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
62161	41.8 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
62162	68.3 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
62163	82.2 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
62155	85.5 to 86.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
62164	88.6 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: S *side of* **PADRE ST** *Starting at:* **SOLANO ST** **$35,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161117	PAINTBRUSH DR	DOUBLE TREE WAY	FAIRMONT CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70708	0.0 to 7.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
70706	6.9 to 7.9 feet	Vertical Change	-.3"	5 ft	5	REF		
70709	7.7 to 15.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,560**
70710	15.7 to 17.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
70711	18.8 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
70726	27.8 to 55.0 feet	Key Note Segment		5 ft	136			
70712	58.1 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
70713	71.2 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
70727	77.2 to 90.2 feet	Key Note Segment		5 ft	65			
70714	92.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
70715	105.2 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
70716	114.4 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
70717	147.1 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
70718	160.7 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
70719	165.4 to 175.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
70720	175.3 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
70721	215.2 to 220.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
70722	223.3 to 243.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
70723	250.3 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
70724	272.8 to 276.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
70725	277.6 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
70728	278.3 to 279.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: E *side of* **PAINTBRUSH DR** *Starting at:* **DOUBLE TREE WAY** **$90,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161125	PAINTBRUSH DR	EASY CT	LOVE CT	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70804	0.0 to 5.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
70805	5.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
70806	63.5 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
70807	72.5 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
70801	96.2 to 97.2 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
70808	102.3 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70809	107.0 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
70810	151.1 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
70811	184.2 to 189.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
70812	190.3 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
70813	193.8 to 196.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
70814	198.6 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	189	SF	$120	**$22,620**
70802	234.1 to 235.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
70815	239.7 to 240.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
70816	241.5 to 273.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
70803	268.3 to 269.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
70817	271.5 to 273.1 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: E *side of* **PAINTBRUSH DR** *Starting at:* **EASY CT** **$86,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161121	PAINTBRUSH DR	FAIRMONT CT	EASY CT	13

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70771	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
70774	1.5 to 27.6 feet	Key Note Segment		5 ft	131			
70772	28.3 to 31.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$540**
70773	57.2 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **PAINTBRUSH DR** *Starting at:* **FAIRMONT CT** **$2,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109160734	PAINTBRUSH DR	LOVE CT	RIVERVIEW DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68163	2.8 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
68164	8.0 to 27.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
68165	30.8 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
68166	39.1 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
68159	56.2 to 57.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
68167	61.1 to 78.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
68168	80.1 to 82.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
68169	86.6 to 92.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
68170	92.8 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
68171	111.5 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
68172	116.8 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
68184	119.3 to 131.4 feet	Key Note Segment		5 ft	61			
68173	133.5 to 135.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
68174	138.0 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
68185	144.1 to 153.1 feet	Key Note Segment		5 ft	45			
68175	161.3 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
68176	167.2 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
68177	179.1 to 186.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
68178	188.5 to 191.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
68179	193.3 to 194.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
68180	198.6 to 214.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
68181	220.3 to 247.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
68186	247.8 to 265.4 feet	Key Note Segment		5 ft	88			
68161	260.2 to 261.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
68162	266.7 to 267.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
68182	266.7 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
68183	269.8 to 279.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,060**

TOTAL COST FOR: E *side of* **PAINTBRUSH DR** *Starting at:* **LOVE CT** **$108,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161011	PAINTBRUSH DR	RIVERVIEW DR	WINDSOX CT	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69969	2.5 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
69963	3.9 to 4.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
69970	7.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
69964	13.5 to 14.5 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
69971	16.5 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
69965	18.6 to 19.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
69972	29.8 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
69966	52.7 to 53.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
69973	56.7 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
69974	65.5 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69975	74.6 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
69976	81.5 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
69980	83.3 to 93.7 feet	Key Note Segment		5 ft	52			
69967	83.5 to 84.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
69977	93.9 to 120.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	132	SF	$40	**$5,280**
69968	108.4 to 109.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
69978	120.7 to 128.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,500**
69979	131.7 to 140.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**

TOTAL COST FOR: W *side of* **PAINTBRUSH DR** *Starting at:* **RIVERVIEW DR** **$34,485.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161114	PAINTBRUSH DR	TRAGON ST	DOUBLE TREE WAY	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70696	0.0 to 9.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
70697	11.6 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
70698	13.0 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
70699	22.2 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
70700	32.0 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
70701	44.5 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
70694	47.5 to 48.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
70695	62.2 to 63.2 feet	**Vertical Change**	2.39"	5 ft	5	SF	$75	**$375**
70702	64.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
70703	111.0 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
70704	144.3 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
70705	156.0 to 157.8 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **PAINTBRUSH DR** *Starting at:* **TRAGON ST** **$43,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161019	PAINTBRUSH DR	WINDSOX CT	TRAGON ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70037	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
70038	11.3 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
70039	21.8 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
70040	43.3 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
70041	60.4 to 74.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
70042	77.3 to 83.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
70043	96.9 to 104.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
70071	104.4 to 126.7 feet	Key Note Segment		5 ft	112			
70044	126.7 to 137.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,200**
70024	128.5 to 129.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
70045	140.3 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
70025	145.4 to 146.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
70046	151.6 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
70047	195.9 to 203.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
70072	204.8 to 229.3 feet	Key Note Segment		5 ft	123			
70026	220.5 to 221.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
70048	229.3 to 234.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,020**
70049	237.3 to 240.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
70050	242.6 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
70051	265.2 to 272.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
70073	272.4 to 292.8 feet	Key Note Segment		5 ft	102			
70052	293.8 to 297.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
70053	302.8 to 305.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
70054	305.3 to 307.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
70027	308.8 to 309.8 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
70055	312.1 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$10,020**
70056	329.5 to 330.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
70057	335.8 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161019	PAINTBRUSH DR	WINDSOX CT	TRAGON ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70074	337.6 to 367.3 feet	Key Note Segment		5 ft	149			
70028	355.6 to 356.6 feet	Vertical Change	.29"	5 ft	5	REF		
70029	362.2 to 363.2 feet	Vertical Change	.34"	5 ft	5	REF		
70058	371.8 to 374.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
70059	376.7 to 381.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
70060	383.9 to 387.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
70075	387.9 to 421.0 feet	Key Note Segment		5 ft	166			
70061	426.3 to 443.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
70030	442.7 to 443.7 feet	Vertical Change	-.39"	5 ft	5	REF		
70062	443.7 to 464.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
70031	451.8 to 452.8 feet	Vertical Change	-.31"	5 ft	5	REF		
70032	465.5 to 466.5 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
70033	478.6 to 479.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
70063	489.8 to 494.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
70076	494.6 to 516.8 feet	Key Note Segment		5 ft	111			
70034	506.8 to 507.8 feet	Vertical Change	.31"	5 ft	5	REF		
70064	519.2 to 520.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
70065	522.0 to 527.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
70066	527.2 to 530.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
70067	542.7 to 557.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
70035	556.1 to 557.1 feet	Vertical Change	-.5"	5 ft	5	REF		
70077	579.0 to 587.0 feet	Key Note Segment		5 ft	40			
70068	588.8 to 589.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70036	590.5 to 591.5 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
70069	602.1 to 630.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
70070	642.8 to 652.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: W *side of* **PAINTBRUSH DR** *Starting at:* **WINDSOX CT** **$159,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151024	PAMELA DR	DE ANN COVE	STEVEN LANE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67896	0.7 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
67897	25.6 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
67894	31.6 to 32.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
67898	34.9 to 40.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
67907	43.3 to 59.3 feet	Key Note Segment		5 ft	80			
67899	66.4 to 78.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
67900	78.9 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67901	84.5 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
67902	95.3 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
67903	110.8 to 114.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
67904	114.0 to 116.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
67905	126.2 to 135.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
67906	135.4 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **DE ANN COVE** **$52,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151011	PAMELA DR	DEBORAH LN	TAYLOR LANE	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67705	0.7 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
67706	14.0 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
67707	19.6 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
67708	27.8 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
67709	35.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
67710	43.3 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
67711	53.6 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
67712	56.1 to 59.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
67702	61.3 to 62.3 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
67703	69.9 to 70.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
67713	71.5 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
67714	87.6 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
67715	88.8 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
67716	101.3 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
67717	106.4 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
67718	120.8 to 123.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
67704	125.6 to 126.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
67719	127.0 to 138.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
67721	137.3 to 138.5 feet		5.0-6.0%	5 ft	6			
67722	138.5 to 139.7 feet		6.0-7.0%	5 ft	6			
67720	138.7 to 139.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **DEBORAH LN** **$58,425.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151009	PAMELA DR	GRANADA DR	DEBORAH LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67692	0.0 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
67693	8.2 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
67694	14.2 to 18.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
67695	21.8 to 38.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
67691	36.8 to 37.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
67696	38.1 to 46.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
67699	41.1 to 46.4 feet		5.0-6.0%	5 ft	27			
67697	46.4 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
67700	47.9 to 50.2 feet		8.0-9.0%	5 ft	12			
67701	47.9 to 50.2 feet	Running Slope	8.0-9.0%	5 ft	12	SF	$120	**$1,380**
67698	49.4 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **GRANADA DR** **$27,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151028	PAMELA DR	HILLSBORO AVE	STEVEN LANE	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67927	0.9 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
67928	13.1 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
67929	16.0 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
67930	30.0 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
67931	43.3 to 47.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	23	SF	$40	**$900**
67932	50.4 to 75.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	125	SF	$40	**$4,980**
67933	75.7 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
67934	80.5 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
67935	88.1 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
67936	97.6 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
67937	105.6 to 109.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
67938	114.4 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
67925	124.4 to 125.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
67939	126.2 to 131.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
67940	132.5 to 135.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
67941	137.4 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
67926	138.1 to 139.1 feet	Vertical Change	-.27"	5 ft	5	REF		
67942	145.8 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
67943	151.3 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **PAMELA DR** *Starting at:* **HILLSBORO AVE** **$59,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151019	PAMELA DR	SHELLEY COVE	DE ANN COVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67822	0.0 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
67823	7.7 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
67824	21.4 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
67825	31.2 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
67819	40.9 to 41.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
67826	50.1 to 55.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
67820	52.4 to 53.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
67827	57.6 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
67828	75.1 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
67829	83.2 to 84.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67830	87.9 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
67831	102.8 to 133.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,540**
67821	118.4 to 119.4 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **SHELLEY COVE** **$57,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151027	PAMELA DR	STEVEN LANE	HILLSBORO AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67912	1.0 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
67913	8.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
67908	11.1 to 12.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
67914	16.9 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
67909	23.0 to 24.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
67915	26.4 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
67916	35.8 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
67917	44.3 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
67910	45.0 to 46.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
67911	59.7 to 60.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
67918	59.8 to 70.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,180**
67919	72.3 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
67920	93.1 to 105.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
67921	106.3 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
67922	140.9 to 151.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
67923	150.3 to 152.5 feet		5.0-6.0%	5 ft	11			
67924	150.3 to 152.5 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **STEVEN LANE** **$73,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151049	PAMELA DR	STEVEN LANE	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68036	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
68037	3.8 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
68038	30.9 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
68017	32.9 to 33.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
68018	35.0 to 36.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
68039	46.5 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
68019	49.5 to 50.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
68021	59.6 to 60.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
68040	65.3 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
68041	78.6 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
68042	88.3 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
68043	100.1 to 112.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
68044	114.5 to 118.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
68045	118.8 to 124.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
68046	126.0 to 128.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
68047	132.1 to 133.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
68107	138.1 to 161.9 feet	Key Note Segment		5 ft	119			
68108	171.4 to 186.9 feet	Key Note Segment		5 ft	78			
68022	179.9 to 180.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
68023	200.7 to 201.7 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
68109	204.9 to 216.5 feet	Key Note Segment		5 ft	58			
68024	210.1 to 211.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
68110	222.9 to 252.8 feet	Key Note Segment		5 ft	150			
68025	237.0 to 238.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
68048	257.9 to 259.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
68049	262.4 to 265.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
68050	266.9 to 268.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
68051	277.5 to 284.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151049	PAMELA DR	STEVEN LANE	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68052	285.2 to 288.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
68053	288.6 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
68054	306.8 to 311.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
68055	317.5 to 340.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
68026	323.0 to 324.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
68056	340.5 to 342.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
68057	344.4 to 349.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
68027	347.0 to 348.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
68111	349.7 to 365.6 feet	Key Note Segment		5 ft	80			
68058	367.7 to 368.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68059	369.5 to 382.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
68060	382.1 to 391.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
68112	391.4 to 409.3 feet	Key Note Segment		5 ft	90			
68061	417.7 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
68062	430.7 to 432.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68063	435.3 to 437.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
68064	441.7 to 463.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
68065	463.6 to 465.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
68066	468.6 to 469.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
68113	471.0 to 484.2 feet	Key Note Segment		5 ft	66			
68067	488.9 to 490.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
68068	495.0 to 496.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
68114	497.5 to 510.5 feet	Key Note Segment		5 ft	65			
68069	513.5 to 517.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
68070	521.2 to 528.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
68071	528.2 to 543.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,180**
68030	531.9 to 532.9 feet	**Vertical Change**	-.43"	5 ft	5	REF		
68072	548.0 to 556.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151049	PAMELA DR	STEVEN LANE	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68073	560.1 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
68074	564.2 to 568.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
68115	575.7 to 587.3 feet	Key Note Segment		5 ft	58			
68075	592.3 to 594.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
68076	596.3 to 597.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
68116	598.6 to 614.8 feet	Key Note Segment		5 ft	81			
68077	617.1 to 618.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
68078	631.1 to 632.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
68079	632.8 to 640.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
68080	644.5 to 646.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
68081	650.1 to 653.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
68082	658.7 to 660.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
68083	670.3 to 674.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
68117	674.8 to 693.2 feet	Key Note Segment		5 ft	92			
68084	695.4 to 699.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
68118	700.4 to 718.4 feet	Key Note Segment		5 ft	90			
68085	726.8 to 729.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
68031	739.4 to 740.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
68086	743.0 to 746.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
68087	746.5 to 753.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
68119	755.1 to 769.5 feet	Key Note Segment		5 ft	72			
68032	762.8 to 763.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
68088	773.3 to 774.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
68089	777.9 to 782.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
68090	784.6 to 791.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
68091	793.3 to 807.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
68120	808.0 to 824.8 feet	Key Note Segment		5 ft	84			
68092	828.9 to 847.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109151049	PAMELA DR	STEVEN LANE	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68093	848.5 to 852.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
68033	851.0 to 852.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
68094	852.6 to 856.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
68095	856.6 to 857.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
68096	859.5 to 862.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
68097	862.8 to 865.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
68098	867.3 to 868.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
68121	870.1 to 888.8 feet	Key Note Segment		5 ft	94			
68099	889.0 to 890.1 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	6	SF	$40	**$220**
68034	905.7 to 906.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
68122	907.4 to 925.1 feet	Key Note Segment		5 ft	89			
68100	930.7 to 952.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
68101	952.8 to 966.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
68123	968.5 to 985.4 feet	Key Note Segment		5 ft	85			
68102	986.4 to 987.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$720**
68103	989.3 to 996.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
68104	996.4 to 998.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
68124	1000.3 to 1017.7 feet	Key Note Segment		5 ft	87			
68125	1019.2 to 1020.3 feet		5.0-6.0%	5 ft	6			
68035	1020.6 to 1021.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
68105	1021.9 to 1023.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68106	1029.5 to 1035.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: S *side of* **PAMELA DR** *Starting at:* **STEVEN LANE** **$247,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109151013	PAMELA DR	TAYLOR LANE	SHELLEY COVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67725	0.3 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
67726	4.7 to 8.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
67727	12.4 to 16.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
67728	16.7 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
67744	18.2 to 32.9 feet	Key Note Segment		5 ft	74			
67723	26.2 to 27.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
67729	37.1 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
67730	39.9 to 50.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
67731	53.2 to 58.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
67732	58.8 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67745	60.8 to 76.8 feet	Key Note Segment		5 ft	80			
67733	80.2 to 82.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
67746	90.7 to 104.5 feet	Key Note Segment		5 ft	69			
67734	108.4 to 109.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
67735	112.0 to 118.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
67736	119.6 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
67724	129.6 to 130.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
67737	145.9 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
67738	149.8 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
67739	168.5 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
67740	185.8 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
67741	198.0 to 199.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	7	SF	$120	**$780**
67742	199.8 to 200.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
67743	200.8 to 202.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **PAMELA DR** *Starting at:* **TAYLOR LANE** **$66,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181435	PAPAYA ST	863 PAPAYA ST	906 PAPAYA ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71978	0.4 to 6.5 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	27	SF	$120	**$3,294**
71979	9.0 to 16.5 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	34	SF	$120	**$4,050**
71980	20.6 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
71981	26.5 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,268**
71982	34.8 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
71983	44.3 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
71995	49.1 to 71.1 feet	Key Note Segment		5 ft	99			
71984	72.1 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,106**
71969	75.2 to 76.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
71996	76.0 to 97.2 feet	Key Note Segment		5 ft	95			
71970	86.1 to 87.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
71985	98.2 to 101.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,944**
71986	102.5 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
71987	120.6 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,862**
71997	126.2 to 148.6 feet	Key Note Segment		5 ft	101			
71971	137.9 to 138.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
71988	149.9 to 151.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
71998	152.6 to 173.9 feet	Key Note Segment		5 ft	96			
71989	175.2 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,942**
71973	178.6 to 179.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
71990	186.8 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
71974	192.0 to 193.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
71991	193.0 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
71975	200.1 to 201.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$338**
71999	204.0 to 224.8 feet	Key Note Segment		5 ft	94			
72000	229.7 to 251.4 feet	Key Note Segment		5 ft	98			
71976	241.5 to 242.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
71992	263.0 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181435	PAPAYA ST	863 PAPAYA ST	906 PAPAYA ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71993	270.3 to 273.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,836**
72001	282.0 to 302.9 feet	Key Note Segment		5 ft	94			
71977	293.2 to 294.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
71994	304.9 to 306.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**

TOTAL COST FOR: SW *side of* **PAPAYA ST** *Starting at:* **863 PAPAYA ST** **$37,111.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181518	PAPAYA ST	897 PAPAYA ST	E ALMOND AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72351	0.3 to 2.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	9	SF	$120	**$1,080**
72352	2.3 to 8.0 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	26	SF	$120	**$3,078**
72353	8.7 to 16.4 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	35	SF	$120	**$4,158**
72344	18.8 to 19.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
72354	19.8 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
72355	24.3 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,906**
72379	48.8 to 70.5 feet	Key Note Segment		5 ft	98			
72356	72.2 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
72380	75.1 to 97.1 feet	Key Note Segment		5 ft	99			
72357	99.7 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
72358	109.0 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
72359	118.2 to 120.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$972**
72360	122.6 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
72361	124.2 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72362	128.3 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72381	130.8 to 152.5 feet	Key Note Segment		5 ft	98			
72363	155.1 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
72382	156.8 to 178.5 feet	Key Note Segment		5 ft	98			
72364	180.6 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
72365	186.1 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,068**
72345	198.6 to 199.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
72383	210.9 to 229.9 feet	Key Note Segment		5 ft	86			
72366	230.3 to 231.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$180**
72367	231.3 to 235.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
72384	235.2 to 256.1 feet	Key Note Segment		5 ft	94			
72368	260.9 to 262.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72369	277.3 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,264**
72370	292.8 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181518	PAPAYA ST	897 PAPAYA ST	E ALMOND AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72385	296.8 to 318.9 feet	Key Note Segment		5 ft	99			
72347	308.7 to 309.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
72371	320.2 to 322.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
72386	322.7 to 344.8 feet	Key Note Segment		5 ft	99			
72348	323.0 to 324.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
72372	345.7 to 349.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,944**
72373	349.8 to 352.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,566**
72374	352.7 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
72375	357.1 to 358.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
72349	357.7 to 358.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
72376	358.9 to 367.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,590**
72377	371.0 to 378.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,888**
72378	380.8 to 386.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,916**
72350	384.3 to 385.3 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **PAPAYA ST** *Starting at:* **897 PAPAYA ST** **$77,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181439	PAPAYA ST	916 PAPAYA ST	GRAPE ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72011	4.3 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,266**
72031	12.3 to 34.0 feet	Key Note Segment		5 ft	98			
72012	36.4 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
72032	38.1 to 60.4 feet	Key Note Segment		5 ft	100			
72013	65.3 to 69.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,484**
72014	70.8 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
72002	80.0 to 81.0 feet	**Vertical Change**	2.26"	5 ft	5	REF		
72003	81.8 to 82.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$338**
72015	83.0 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,886**
72033	94.3 to 116.2 feet	Key Note Segment		5 ft	99			
72004	94.9 to 95.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
72005	116.1 to 117.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
72016	117.1 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
72034	120.0 to 141.3 feet	Key Note Segment		5 ft	96			
72017	142.6 to 154.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,426**
72006	155.4 to 156.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
72018	155.7 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,016**
72019	176.3 to 180.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,430**
72035	180.8 to 202.5 feet	Key Note Segment		5 ft	98			
72020	205.1 to 206.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
72036	206.8 to 227.5 feet	Key Note Segment		5 ft	93			
72021	227.9 to 229.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$216**
72007	228.0 to 229.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
72022	229.1 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,970**
72008	239.6 to 240.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
72023	239.8 to 258.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,882**
72037	258.3 to 279.9 feet	Key Note Segment		5 ft	97			
72024	280.3 to 284.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$756**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181439	PAPAYA ST	916 PAPAYA ST	GRAPE ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72038	285.8 to 304.9 feet	Key Note Segment		5 ft	86			
72009	305.6 to 306.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
72025	306.1 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,348**
72026	312.3 to 328.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,964**
72010	318.1 to 319.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
72027	332.3 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
72039	335.2 to 357.2 feet	Key Note Segment		5 ft	99			
72028	359.1 to 361.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,350**
72040	361.7 to 383.0 feet	Key Note Segment		5 ft	96			
72029	385.5 to 393.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
72030	393.5 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**

TOTAL COST FOR: SW *side of* **PAPAYA ST** *Starting at:* **916 PAPAYA ST** **$78,475.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181431	PAPAYA ST	E ALMOND AVE	826 PAPAYA ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71959	0.8 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,458**
71960	6.2 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
71966	7.9 to 29.3 feet	Key Note Segment		5 ft	96			
71956	8.8 to 9.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
71957	29.2 to 30.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
71961	30.9 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
71967	33.3 to 54.5 feet	Key Note Segment		5 ft	95			
71958	33.7 to 34.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
71962	58.8 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,538**
71963	67.6 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
71964	72.8 to 74.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
71965	75.9 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,346**
71968	85.8 to 107.6 feet	Key Note Segment		5 ft	98			

TOTAL COST FOR: SW *side of* **PAPAYA ST** *Starting at:* **E ALMOND AVE** **$12,528.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181515	PAPAYA ST	GRAPE ST	907 PAPAYA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72333	6.3 to 28.3 feet	Key Note Segment		5 ft	99			
72298	17.2 to 18.2 feet	Vertical Change	.49"	5 ft	5	REF		
72334	31.4 to 54.0 feet	Key Note Segment		5 ft	102			
72299	32.3 to 33.3 feet	Vertical Change	-.38"	5 ft	5	REF		
72300	53.6 to 54.6 feet	Vertical Change	-.36"	5 ft	5	REF		
72312	55.2 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
72301	64.3 to 65.3 feet	Vertical Change	.36"	5 ft	5	REF		
72313	73.2 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,804**
72302	75.1 to 76.1 feet	Vertical Change	.29"	5 ft	5	REF		
72335	88.1 to 110.3 feet	Key Note Segment		5 ft	100			
72303	88.9 to 89.9 feet	Vertical Change	-.26"	5 ft	5	REF		
72314	111.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
72336	113.9 to 136.5 feet	Key Note Segment		5 ft	102			
72315	136.5 to 139.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	11	SF	$40	**$450**
72316	145.1 to 149.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,592**
72317	149.9 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72318	154.7 to 161.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,618**
72319	162.3 to 168.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,186**
72320	168.7 to 170.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72337	170.5 to 192.8 feet	Key Note Segment		5 ft	100			
72321	193.8 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
72338	196.4 to 217.9 feet	Key Note Segment		5 ft	97			
72305	207.4 to 208.4 feet	Vertical Change	-.26"	5 ft	5	REF		
72322	218.2 to 223.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	24	SF	$40	**$954**
72323	223.5 to 225.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
72324	229.7 to 248.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,098**
72339	248.4 to 270.8 feet	Key Note Segment		5 ft	101			
72306	270.3 to 271.3 feet	Vertical Change	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181515	PAPAYA ST	GRAPE ST	907 PAPAYA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72325	271.8 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
72340	274.5 to 296.9 feet	Key Note Segment		5 ft	101			
72307	296.3 to 297.3 feet	**Vertical Change**	.51"	5 ft	5	REF		
72326	297.7 to 306.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,752**
72327	309.2 to 315.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,294**
72308	313.7 to 314.7 feet	**Vertical Change**	-.67"	5 ft	5	REF		
72328	317.6 to 325.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,374**
72341	326.2 to 348.3 feet	Key Note Segment		5 ft	99			
72329	349.7 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
72342	351.9 to 374.1 feet	Key Note Segment		5 ft	100			
72309	373.4 to 374.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
72330	375.5 to 377.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
72331	377.8 to 388.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**
72332	395.9 to 405.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,346**
72343	408.9 to 430.5 feet	Key Note Segment		5 ft	97			
72310	411.8 to 412.8 feet	**Vertical Change**	.84"	5 ft	5	REF		
72311	419.8 to 420.8 feet	**Vertical Change**	-.67"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **PAPAYA ST** *Starting at:* **GRAPE ST** **$68,742.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211512	PARK ST	OAK ST	200 PARK ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106345	0.1 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
106346	12.8 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
106347	16.7 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
106348	37.6 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: W *side of* **PARK ST** *Starting at:* **OAK ST** **$14,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191442	PARKWOOD AVE	1649 LEMON AVE	LEMON AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103806	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
103807	3.0 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
103802	7.1 to 8.1 feet	**Vertical Change**	.86"	5 ft	5	REF		
103808	18.7 to 21.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
103803	19.4 to 20.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103809	24.3 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
103810	45.1 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
103811	51.0 to 67.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
103804	58.6 to 59.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
103805	66.3 to 67.3 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PARKWOOD AVE** *Starting at:* **1649 LEMON AVE** **$34,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191325	PARKWOOD AVE	1692 TANGERINE AVE	TANGERINE AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103364	0.0 to 9.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
103365	11.8 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
103362	34.8 to 35.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
103366	43.0 to 64.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
103363	61.1 to 62.1 feet	**Vertical Change**	.89"	5 ft	5	REF		
103367	64.9 to 66.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
103368	66.7 to 68.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: S *side of* **PARKWOOD AVE** *Starting at:* **1692 TANGERINE AVE** **$34,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191503	PARKWOOD AVE	LEMON AVE	VALENCIA AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103938	0.9 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
103939	9.8 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
103955	13.2 to 32.0 feet	Key Note Segment		5 ft	94			
103927	14.0 to 15.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
103928	32.9 to 33.9 feet	**Vertical Change**	-.53"	5 ft	5	REF		
103940	33.2 to 34.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
103941	36.3 to 40.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
103956	40.7 to 60.1 feet	Key Note Segment		5 ft	97			
103929	40.8 to 41.8 feet	**Vertical Change**	-.56"	5 ft	5	REF		
103942	61.4 to 65.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
103943	70.4 to 74.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
103944	76.9 to 83.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,660**
103945	83.4 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
103930	96.9 to 97.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
103931	98.8 to 99.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
103946	100.9 to 106.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
103957	106.8 to 128.9 feet	Key Note Segment		5 ft	111			
103932	123.9 to 124.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103947	129.6 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
103958	135.3 to 154.5 feet	Key Note Segment		5 ft	96			
103933	154.8 to 155.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
103948	156.2 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
103934	167.7 to 168.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
103949	187.4 to 201.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
103959	202.4 to 221.4 feet	Key Note Segment		5 ft	95			
103950	222.8 to 227.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
103951	227.1 to 229.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
103960	229.8 to 249.6 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191503	PARKWOOD AVE	LEMON AVE	VALENCIA AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103935	230.6 to 231.6 feet	Vertical Change	-.29"	5 ft	5	REF		
103936	240.2 to 241.2 feet	Vertical Change	.27"	5 ft	5	REF		
103937	249.8 to 250.8 feet	Vertical Change	-.49"	5 ft	5	REF		
103952	251.6 to 252.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103953	252.6 to 269.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
103954	270.2 to 275.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: N *side of* **PARKWOOD AVE** *Starting at:* **LEMON AVE** **$75,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191440	PARKWOOD AVE	LEMON AVE	1673 PARKWOOD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103797	0.0 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
103793	10.6 to 11.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
103798	22.0 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
103794	22.7 to 23.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
103799	25.9 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
103800	51.0 to 56.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
103801	58.9 to 70.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
103795	59.4 to 63.3 feet	**Vertical Change**	.26"	5 ft	20	REF		
103796	68.6 to 69.6 feet	**Vertical Change**	.61"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PARKWOOD AVE** *Starting at:* **LEMON AVE** **$36,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191323	PARKWOOD AVE	TANGERINE AVE	RAYMOND THOMAS ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103356	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
103357	6.3 to 16.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
103358	17.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
103359	38.8 to 41.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
103360	43.9 to 61.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
103355	59.8 to 60.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
103361	62.2 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: N *side of* **PARKWOOD AVE** *Starting at:* **TANGERINE AVE** **$33,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191345	PARKWOOD AVE	TANGERINE AVE	VALENCIA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103511	0.3 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
103521	12.3 to 52.7 feet	Key Note Segment		5 ft	202			
103501	12.7 to 13.7 feet	**Vertical Change**	-.59"	5 ft	5	REF		
103512	54.9 to 56.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
103522	56.9 to 77.5 feet	Key Note Segment		5 ft	103			
103502	77.5 to 78.5 feet	**Vertical Change**	.56"	5 ft	5	REF		
103513	79.9 to 81.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
103514	83.2 to 108.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,120**
103503	89.6 to 90.6 feet	**Vertical Change**	2.62"	5 ft	5	REF		
103515	110.5 to 114.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
103516	114.9 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
103504	115.9 to 116.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
103517	123.3 to 129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
103518	131.4 to 132.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
103523	133.2 to 152.7 feet	Key Note Segment		5 ft	98			
103505	143.8 to 144.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
103506	153.6 to 154.6 feet	**Vertical Change**	.54"	5 ft	5	REF		
103519	154.6 to 155.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
103524	157.0 to 197.1 feet	Key Note Segment		5 ft	201			
103507	157.5 to 158.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
103508	173.5 to 174.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
103509	197.2 to 198.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
103520	197.8 to 212.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
103510	211.9 to 212.9 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PARKWOOD AVE** *Starting at:* **TANGERINE AVE** **$43,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191348	PARKWOOD AVE	VALENCIA AVE	TANGERINE AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103531	0.7 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
103532	11.8 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
103533	19.8 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
103534	24.3 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
103535	32.1 to 51.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
103525	45.3 to 46.3 feet	**Vertical Change**	.83"	5 ft	5	REF		
103545	53.3 to 72.7 feet	Key Note Segment		5 ft	97			
103536	74.3 to 75.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
103537	75.7 to 81.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
103546	81.0 to 100.3 feet	Key Note Segment		5 ft	97			
103526	81.8 to 82.8 feet	**Vertical Change**	-.49"	5 ft	5	REF		
103538	103.1 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
103527	122.4 to 123.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
103539	136.8 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
103540	152.8 to 156.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
103547	156.9 to 176.3 feet	Key Note Segment		5 ft	97			
103529	176.8 to 177.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
103541	178.3 to 181.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
103542	181.8 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
103548	183.4 to 202.4 feet	Key Note Segment		5 ft	95			
103530	183.9 to 184.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
103543	204.2 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
103544	217.3 to 221.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: N *side of* **PARKWOOD AVE** *Starting at:* **VALENCIA AVE** **$68,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191437	PARKWOOD AVE	VALENCIA AVE	LEMON AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103761	0.7 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
103762	14.7 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
103749	25.7 to 26.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
103750	30.8 to 31.8 feet	**Vertical Change**	2.03"	5 ft	5	REF		
103777	45.2 to 65.0 feet	Key Note Segment		5 ft	99			
103751	46.1 to 47.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103752	69.0 to 70.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
103763	70.0 to 79.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
103764	82.3 to 85.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
103765	87.0 to 90.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
103778	92.3 to 112.6 feet	Key Note Segment		5 ft	102			
103766	114.3 to 115.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
103767	116.3 to 118.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
103768	119.1 to 120.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
103779	120.3 to 140.0 feet	Key Note Segment		5 ft	99			
103753	121.2 to 122.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
103754	131.1 to 132.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
103769	142.3 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,940**
103755	151.9 to 152.9 feet	**Vertical Change**	2.27"	5 ft	5	REF		
103780	188.0 to 207.5 feet	Key Note Segment		5 ft	98			
103756	188.7 to 189.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
103770	209.5 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
103781	215.3 to 235.7 feet	Key Note Segment		5 ft	102			
103771	236.9 to 246.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
103772	254.9 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
103757	259.3 to 260.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
103773	263.8 to 284.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
103782	284.7 to 305.9 feet	Key Note Segment		5 ft	106			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191437	PARKWOOD AVE	VALENCIA AVE	LEMON AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103758	300.9 to 301.9 feet	Vertical Change	-.29"	5 ft	5	REF		
103759	306.5 to 307.5 feet	Vertical Change	.37"	5 ft	5	REF		
103774	306.7 to 307.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103775	307.7 to 315.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
103783	317.2 to 336.6 feet	Key Note Segment		5 ft	97			
103760	318.1 to 319.1 feet	Vertical Change	.33"	5 ft	5	REF		
103776	338.1 to 340.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **PARKWOOD AVE** *Starting at:* **VALENCIA AVE** **$94,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191120	PASEO DEL MAR PRKW	RANCHO MIRAGE RD	SAN GABRIEL DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73425	0.0 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
73413	10.7 to 11.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
73472	21.3 to 41.5 feet	Key Note Segment		5 ft	101			
73414	22.0 to 23.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
73426	41.5 to 48.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,360**
73427	50.4 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
73428	71.3 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
73473	72.6 to 92.5 feet	Key Note Segment		5 ft	100			
73429	93.3 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
73474	99.6 to 119.9 feet	Key Note Segment		5 ft	102			
73430	124.6 to 127.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
73431	128.3 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
73432	132.3 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
73433	142.0 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
73434	158.1 to 159.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
73435	160.5 to 176.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
73475	176.5 to 195.3 feet	Key Note Segment		5 ft	94			
73415	186.9 to 187.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
73436	196.9 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
73416	198.1 to 199.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
73437	199.1 to 205.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
73438	210.9 to 219.5 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	43	SF	$120	**$5,160**
73439	220.8 to 221.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	5	SF	$120	**$600**
73440	228.0 to 229.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
73441	232.3 to 240.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
73442	240.4 to 270.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,820**
73443	273.7 to 280.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
73476	280.4 to 299.9 feet	Key Note Segment		5 ft	98			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191120	PASEO DEL MAR PRKW	RANCHO MIRAGE RD	SAN GABRIEL DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73444	300.3 to 301.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300
73417	302.6 to 303.6 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
73445	306.1 to 308.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,380
73477	308.4 to 328.1 feet	Key Note Segment		5 ft	99			
73418	318.3 to 319.3 feet	Vertical Change	.4"	5 ft	5	REF		
73446	328.9 to 338.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	$5,820
73447	341.0 to 342.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
73448	345.5 to 351.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
73449	353.5 to 370.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	$10,200
73450	373.9 to 381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
73478	383.8 to 403.3 feet	Key Note Segment		5 ft	98			
73451	404.1 to 405.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
73452	408.2 to 411.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
73479	412.2 to 432.9 feet	Key Note Segment		5 ft	104			
73453	434.4 to 437.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
73454	440.3 to 446.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
73455	447.0 to 451.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	$2,460
73456	452.2 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,760
73457	467.0 to 488.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	$12,960
73419	489.1 to 490.1 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
73480	489.1 to 508.0 feet	Key Note Segment		5 ft	95			
73458	508.0 to 514.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	33	SF	$40	$1,300
73481	515.8 to 535.6 feet	Key Note Segment		5 ft	99			
73459	535.7 to 540.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	26	SF	$40	$1,040
73460	540.9 to 571.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	$18,300
73420	545.0 to 546.0 feet	Vertical Change	.3"	5 ft	5	REF		
73461	573.7 to 579.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,420
73462	579.4 to 582.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191120	PASEO DEL MAR PRKW	RANCHO MIRAGE RD	SAN GABRIEL DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73463	584.7 to 591.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$4,020**
73482	591.4 to 612.0 feet	Key Note Segment		5 ft	103			
73464	612.0 to 618.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	33	SF	$40	**$1,300**
73483	619.3 to 638.8 feet	Key Note Segment		5 ft	98			
73421	620.1 to 621.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
73465	640.1 to 648.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
73422	646.6 to 647.6 feet	**Vertical Change**	.54"	5 ft	5	REF		
73466	650.2 to 668.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
73467	669.0 to 671.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
73468	675.2 to 676.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
73469	679.2 to 694.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
73484	694.4 to 714.9 feet	Key Note Segment		5 ft	103			
73423	695.6 to 696.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
73470	715.1 to 723.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,620**
73485	723.2 to 742.3 feet	Key Note Segment		5 ft	96			
73471	743.3 to 764.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
73424	762.2 to 763.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PASEO DEL MAR PRKW** *Starting at:* **RANCHO MIRAGE RD** **$225,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191113	PASEO DEL MAR PRKW	SAN GABRIEL DR	RANCHO MIRAGE RD	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73346	0.0 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
73347	13.7 to 20.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
73398	21.3 to 41.8 feet	Key Note Segment		5 ft	103			
73348	42.2 to 48.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,280**
73399	48.6 to 68.0 feet	Key Note Segment		5 ft	97			
73349	69.0 to 79.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
73350	80.7 to 84.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
73351	88.9 to 90.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
73352	92.4 to 94.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
73353	97.4 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
73354	118.6 to 124.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
73400	124.7 to 144.8 feet	Key Note Segment		5 ft	101			
73355	145.8 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
73401	152.3 to 171.9 feet	Key Note Segment		5 ft	98			
73356	172.7 to 175.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
73357	178.4 to 179.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
73358	181.8 to 183.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
73359	186.3 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
73360	209.9 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
73334	225.1 to 226.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
73402	228.2 to 247.4 feet	Key Note Segment		5 ft	96			
73361	249.5 to 255.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
73403	255.5 to 275.6 feet	Key Note Segment		5 ft	101			
73362	277.2 to 280.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
73363	280.6 to 285.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
73364	287.4 to 289.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
73365	294.3 to 303.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
73366	303.9 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191113	PASEO DEL MAR PRKW	SAN GABRIEL DR	RANCHO MIRAGE RD	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73367	323.7 to 331.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
73404	332.2 to 352.3 feet	Key Note Segment		5 ft	101			
73336	342.4 to 343.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
73368	352.7 to 357.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
73369	358.0 to 359.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
73405	359.5 to 378.9 feet	Key Note Segment		5 ft	97			
73370	378.9 to 388.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	47	SF	$40	**$1,880**
73337	379.4 to 380.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
73371	388.7 to 407.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
73372	410.3 to 411.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
73373	413.3 to 418.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
73374	420.8 to 423.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
73375	427.1 to 434.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
73406	436.3 to 455.7 feet	Key Note Segment		5 ft	97			
73338	454.7 to 455.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
73376	456.4 to 457.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
73377	457.5 to 463.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73407	463.3 to 482.1 feet	Key Note Segment		5 ft	94			
73378	485.3 to 488.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
73339	487.5 to 488.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
73379	493.4 to 494.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
73380	497.4 to 514.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,960**
73340	502.4 to 503.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
73381	514.6 to 519.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
73382	522.3 to 525.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
73383	528.4 to 531.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
73384	532.5 to 539.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
73408	539.1 to 558.3 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191113	PASEO DEL MAR PRKW	SAN GABRIEL DR	RANCHO MIRAGE RD	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73385	559.3 to 563.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
73409	566.7 to 585.4 feet	Key Note Segment		5 ft	93			
73386	586.8 to 595.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
73387	598.1 to 601.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
73388	603.0 to 613.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
73389	614.8 to 619.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
73390	619.7 to 627.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
73391	630.8 to 641.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
73410	641.6 to 661.4 feet	Key Note Segment		5 ft	99			
73341	652.6 to 653.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
73392	662.4 to 668.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
73411	670.2 to 689.3 feet	Key Note Segment		5 ft	96			
73342	689.7 to 690.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
73393	691.9 to 699.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
73394	699.3 to 716.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
73395	718.5 to 720.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
73412	721.3 to 741.5 feet	Key Note Segment		5 ft	101			
73343	741.4 to 742.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
73396	743.3 to 752.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
73344	749.9 to 750.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
73397	755.3 to 762.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
73345	760.5 to 761.5 feet	**Vertical Change**	.44"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PASEO DEL MAR PRKW** *Starting at:* **SAN GABRIEL DR** **$216,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251317	PAUL AVE	1828 PAUL AVE	SUNSET AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108306	0.0 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
108300	5.2 to 6.2 feet	**Vertical Change**	-.64"	5 ft	5	REF		
108307	9.0 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
108308	13.9 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
108301	23.1 to 24.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
108309	23.1 to 40.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
108302	33.6 to 34.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
108303	39.9 to 40.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
108310	40.8 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
108304	50.4 to 51.4 feet	**Vertical Change**	.65"	5 ft	5	REF		
108311	53.5 to 58.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
108305	59.0 to 60.0 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **PAUL AVE** *Starting at:* **1828 PAUL AVE** **$30,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191410	PEACH CT	1271 PEACH CT	PEACH ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74317	1.4 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
74318	3.5 to 4.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$540**
74319	5.8 to 7.7 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	9	SF	$120	**$1,026**
74320	9.8 to 10.9 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	5	SF	$120	**$594**
74321	12.5 to 14.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$810**
74322	19.9 to 22.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,458**
74330	23.1 to 44.7 feet	Key Note Segment		5 ft	97			
74323	46.4 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,336**
74331	75.5 to 96.4 feet	Key Note Segment		5 ft	94			
74312	76.0 to 77.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
74332	100.8 to 123.0 feet	Key Note Segment		5 ft	100			
74324	124.2 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
74314	135.4 to 136.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
74325	136.9 to 156.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,746**
74333	156.8 to 178.8 feet	Key Note Segment		5 ft	99			
74315	157.7 to 158.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
74326	179.5 to 182.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,458**
74334	182.7 to 204.4 feet	Key Note Segment		5 ft	98			
74327	205.9 to 234.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,552**
74316	226.0 to 227.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
74335	234.7 to 256.4 feet	Key Note Segment		5 ft	98			
74328	257.2 to 258.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
74336	259.8 to 281.7 feet	Key Note Segment		5 ft	99			
74329	282.6 to 286.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,322**

TOTAL COST FOR: N *side of* **PEACH CT** *Starting at:* **1271 PEACH CT** **$57,037.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110191408	PEACH CT	PEACH ST	1271 PEACH CT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74276	0.0 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,992**
74277	14.8 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,076**
74266	26.2 to 27.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
74278	26.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
74301	41.3 to 63.2 feet	Key Note Segment		5 ft	99			
74267	42.4 to 43.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
74279	64.6 to 65.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
74302	67.4 to 89.4 feet	Key Note Segment		5 ft	99			
74268	89.1 to 90.1 feet	**Vertical Change**	.59"	5 ft	5	REF		
74280	90.5 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,422**
74281	112.3 to 119.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
74303	119.3 to 142.3 feet	Key Note Segment		5 ft	104			
74282	142.3 to 144.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$396**
74304	145.3 to 166.7 feet	Key Note Segment		5 ft	96			
74283	167.5 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,102**
74284	179.3 to 196.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,288**
74305	196.5 to 218.3 feet	Key Note Segment		5 ft	98			
74269	197.2 to 198.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74270	207.5 to 208.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
74285	219.8 to 222.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,566**
74306	222.7 to 244.7 feet	Key Note Segment		5 ft	99			
74271	244.4 to 245.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
74286	245.6 to 262.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,910**
74272	255.3 to 256.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
74287	266.0 to 286.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,962**
74288	289.2 to 294.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,862**
74289	294.8 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
74290	299.1 to 305.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,618**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110191408	PEACH CT	PEACH ST	1271 PEACH CT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74307	305.8 to 327.1 feet	Key Note Segment		5 ft	96			
74291	327.7 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
74308	333.3 to 355.6 feet	Key Note Segment		5 ft	100			
74273	355.4 to 356.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
74292	362.8 to 369.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,726**
74293	375.2 to 379.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,376**
74309	380.7 to 400.8 feet	Key Note Segment		5 ft	90			
74274	381.3 to 382.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
74294	401.6 to 403.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
74295	403.6 to 408.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
74310	432.5 to 454.6 feet	Key Note Segment		5 ft	99			
74296	458.6 to 459.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
74311	459.7 to 481.3 feet	Key Note Segment		5 ft	97			
74297	481.9 to 487.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,186**
74298	491.4 to 492.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
74299	495.3 to 496.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
74300	497.8 to 510.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,966**

TOTAL COST FOR: S/E/N *side of* **PEACH CT** *Starting at:* **PEACH ST** **$105,102.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191355	PEACH ST	CHERRY ST	NECTARINE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74177	4.7 to 10.4 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	26	SF	$120	**$3,078**
74178	10.6 to 13.4 feet	Cross Slope (PAR)	14.0-15.0%	5 ft	13	SF	$120	**$1,512**
74166	18.1 to 19.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$338**
74179	19.9 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,534**
74203	32.0 to 51.8 feet	Key Note Segment		5 ft	89			
74180	52.0 to 53.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$234**
74181	54.3 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
74204	58.8 to 77.9 feet	Key Note Segment		5 ft	86			
74182	78.7 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
74183	83.9 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,636**
74205	107.6 to 129.7 feet	Key Note Segment		5 ft	99			
74184	130.7 to 132.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
74168	134.8 to 135.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
74206	134.8 to 155.9 feet	Key Note Segment		5 ft	95			
74169	155.8 to 156.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
74185	156.8 to 158.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
74186	161.8 to 167.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,294**
74170	169.3 to 170.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
74187	171.3 to 177.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,402**
74188	178.3 to 180.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
74207	180.4 to 202.4 feet	Key Note Segment		5 ft	99			
74171	185.1 to 186.1 feet	**Vertical Change**	-.44"	5 ft	5	REF		
74172	187.3 to 188.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
74189	203.0 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
74208	207.0 to 228.7 feet	Key Note Segment		5 ft	98			
74173	220.3 to 221.3 feet	**Vertical Change**	.47"	5 ft	5	REF		
74190	229.7 to 237.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,266**
74191	247.5 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191355	PEACH ST	CHERRY ST	NECTARINE ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74209	255.8 to 276.5 feet	Key Note Segment		5 ft	93			
74174	276.2 to 277.2 feet	Vertical Change	-.29"	5 ft	5	REF		
74192	277.9 to 279.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$756
74210	280.6 to 302.3 feet	Key Note Segment		5 ft	98			
74175	291.3 to 292.3 feet	Vertical Change	.27"	5 ft	5	REF		
74193	302.8 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,210
74194	316.5 to 324.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,536
74195	324.9 to 336.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	$6,264
74211	336.8 to 357.6 feet	Key Note Segment		5 ft	94			
74196	358.2 to 359.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$180
74197	359.2 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$864
74212	361.7 to 383.4 feet	Key Note Segment		5 ft	98			
74198	384.4 to 423.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	174	SF	$120	$20,844
74199	423.6 to 435.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	$6,372
74200	435.4 to 437.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,026
74201	439.0 to 450.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,318
74202	454.3 to 465.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,156
74176	464.3 to 465.3 feet	Vertical Change	.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **PEACH ST** *Starting at:* **CHERRY ST** **$106,834.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110191403	PEACH ST	NECTARINE ST	PEACH CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74256	0.0 to 1.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74257	5.7 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,934**
74254	6.3 to 7.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
74255	32.3 to 33.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$338**
74258	39.0 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
74264	44.2 to 65.8 feet	Key Note Segment		5 ft	97			
74259	79.1 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,778**
74260	92.8 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,396**
74261	112.7 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
74262	118.1 to 132.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,506**
74263	133.4 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
74265	134.2 to 135.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: NE *side of* **PEACH ST** *Starting at:* **NECTARINE ST** **$40,405.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191412	PEACH ST	PEACH CT	CHERRY ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74338	0.0 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,602**
74339	40.2 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,294**
74340	47.2 to 48.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$594**
74341	51.0 to 75.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,284**
74342	78.1 to 82.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,430**
74343	82.9 to 92.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,184**
74344	93.3 to 97.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,998**
74345	97.0 to 110.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,398**

TOTAL COST FOR: E *side of* **PEACH ST** *Starting at:* **PEACH CT** **$53,784.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221103	PEACH TREE DR	APPLE TREE CT	PEANUT CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81249	0.0 to 8.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
81237	6.9 to 7.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
81250	13.8 to 26.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
81238	20.2 to 21.2 feet	**Vertical Change**	.58"	5 ft	5	REF		
81239	26.3 to 27.3 feet	**Vertical Change**	.55"	5 ft	5	REF		
81251	27.3 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
81240	29.6 to 30.6 feet	**Vertical Change**	.98"	5 ft	5	REF		
81241	31.7 to 36.6 feet	**Vertical Change**	.37"	5 ft	25	REF		
81252	31.8 to 38.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,200**
81242	37.7 to 38.7 feet	**Vertical Change**	1.17"	5 ft	5	REF		
81243	40.8 to 41.8 feet	**Vertical Change**	-.79"	5 ft	5	REF		
81253	41.8 to 50.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
81244	42.5 to 43.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
81245	44.8 to 45.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
81246	48.0 to 49.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
81247	52.2 to 53.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
81254	54.4 to 80.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,360**
81255	82.2 to 89.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
81256	89.8 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
81248	92.6 to 93.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
81257	95.9 to 100.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
81258	100.1 to 101.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
81259	101.4 to 102.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
81260	105.6 to 107.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
81261	110.6 to 113.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
81262	114.3 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
81263	130.8 to 135.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
81264	135.7 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221103	PEACH TREE DR	APPLE TREE CT	PEANUT CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81265	143.7 to 146.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: E *side of* **PEACH TREE DR** *Starting at:* **APPLE TREE CT** **$72,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221054	PEACH TREE DR	CHERRY TREE DR	ORANGE TREE CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81154	0.0 to 1.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
81155	3.3 to 7.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
81156	10.3 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	155	SF	$120	**$18,540**
81144	17.1 to 18.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
81157	43.8 to 45.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
81158	49.5 to 78.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	143	SF	$120	**$17,100**
81159	78.2 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	341	SF	$120	**$40,860**
81145	94.1 to 95.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
81146	103.3 to 104.3 feet	**Vertical Change**	.81"	5 ft	5	REF		
81147	105.0 to 106.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
81149	109.5 to 110.5 feet	**Vertical Change**	-.55"	5 ft	5	REF		
81150	112.8 to 113.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
81151	119.0 to 120.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
81152	131.8 to 132.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
81153	146.3 to 147.3 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **PEACH TREE DR** *Starting at:* **CHERRY TREE DR** **$80,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221059	PEACH TREE DR	ORANGE TREE CT	APPLE TREE CT	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81197	0.8 to 19.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
81195	15.9 to 16.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
81198	22.1 to 23.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
81199	24.3 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81200	30.3 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
81201	37.5 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
81202	41.7 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
81203	51.8 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
81204	63.0 to 71.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
81205	73.3 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
81206	79.4 to 107.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,860**
81207	110.5 to 112.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
81196	115.8 to 116.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
81208	116.3 to 118.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
81209	118.5 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**

TOTAL COST FOR: E *side of* **PEACH TREE DR** *Starting at:* **ORANGE TREE CT** **$70,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221107	PEACH TREE DR	PEANUT CT	PEAR TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81295	0.0 to 25.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
81294	0.3 to 1.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
81296	25.7 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
81297	40.6 to 53.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
81298	56.3 to 60.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
81299	60.9 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
81300	66.2 to 96.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	154	SF	$120	**$18,420**
81301	99.8 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
81302	122.7 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81303	127.1 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**

TOTAL COST FOR: E *side of* **PEACH TREE DR** *Starting at:* **PEANUT CT** **$78,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221106	PEANUT CT	PEACH TREE DR	PEACH TREE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81273	0.0 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
81274	9.5 to 19.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
81287	19.1 to 39.2 feet	Key Note Segment		5 ft	101			
81275	39.9 to 42.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
81276	46.7 to 48.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
81288	49.0 to 69.9 feet	Key Note Segment		5 ft	105			
81266	52.6 to 53.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
81277	81.3 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81267	82.3 to 83.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
81278	89.3 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
81289	94.9 to 119.2 feet	Key Note Segment		5 ft	122			
81279	119.2 to 120.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$220**
81290	121.1 to 143.6 feet	Key Note Segment		5 ft	113			
81280	147.8 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
81268	158.6 to 159.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
81281	159.3 to 161.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
81291	164.8 to 186.9 feet	Key Note Segment		5 ft	111			
81282	187.6 to 189.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
81292	189.5 to 210.4 feet	Key Note Segment		5 ft	105			
81269	210.2 to 211.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
81283	211.2 to 215.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
81284	216.2 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
81285	225.9 to 237.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
81293	238.2 to 258.5 feet	Key Note Segment		5 ft	102			
81270	257.7 to 258.7 feet	**Vertical Change**	-.4"	5 ft	5	REF		
81286	261.0 to 280.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
81271	264.4 to 265.4 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
81272	271.7 to 272.7 feet	**Vertical Change**	1.7"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110221106	PEANUT CT	PEACH TREE DR	PEACH TREE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: S/E/N	*side of* **PEANUT CT**	*Starting at:* **PEACH TREE DR**						**$51,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110906	PEANUT DR	BERRY DR	TOSCHI DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89733	0.0 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
89748	17.7 to 37.9 feet	Key Note Segment		5 ft	101			
89722	21.3 to 22.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
89723	35.1 to 36.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
89734	39.4 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
89749	44.0 to 64.0 feet	Key Note Segment		5 ft	100			
89735	66.3 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
89736	70.6 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
89737	75.1 to 81.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
89738	83.8 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
89725	92.8 to 93.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
89739	96.2 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
89750	103.6 to 123.8 feet	Key Note Segment		5 ft	101			
89740	125.0 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
89726	129.3 to 130.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
89751	130.6 to 150.7 feet	Key Note Segment		5 ft	100			
89741	151.2 to 153.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
89742	155.3 to 159.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,220**
89743	159.2 to 161.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
89744	161.3 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
89745	168.9 to 188.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
89727	170.7 to 171.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
89752	190.1 to 209.7 feet	Key Note Segment		5 ft	98			
89728	190.2 to 191.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
89729	194.1 to 195.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
89746	213.7 to 215.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
89730	213.8 to 214.8 feet	**Vertical Change**	.9"	5 ft	5	REF		
89753	217.1 to 247.8 feet	Key Note Segment		5 ft	154			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110906	PEANUT DR	BERRY DR	TOSCHI DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89732	233.6 to 234.6 feet	Vertical Change	.44"	5 ft	5	REF		
89747	247.8 to 258.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	55	SF	$40	**$2,200**
89754	255.3 to 258.8 feet		5.0-6.0%	5 ft	18			

TOTAL COST FOR: S *side of* **PEANUT DR** *Starting at:* **BERRY DR** **$53,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110904	PEANUT DR	TOSCHI DR	BERRY DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89702	0.8 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
89716	18.5 to 39.1 feet	Key Note Segment		5 ft	103			
89703	39.5 to 43.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
89692	39.8 to 40.8 feet	**Vertical Change**	-.47"	5 ft	5	REF		
89717	43.9 to 64.1 feet	Key Note Segment		5 ft	101			
89693	54.6 to 55.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
89694	61.5 to 62.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
89704	72.4 to 76.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
89705	78.8 to 95.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
89706	100.6 to 103.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
89718	103.6 to 125.1 feet	Key Note Segment		5 ft	108			
89719	129.4 to 151.3 feet	Key Note Segment		5 ft	110			
89696	140.8 to 141.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
89697	147.6 to 148.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
89707	152.2 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
89708	154.8 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
89709	160.2 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
89698	165.6 to 166.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
89710	166.0 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
89711	169.7 to 188.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
89699	179.0 to 180.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
89720	189.9 to 211.0 feet	Key Note Segment		5 ft	106			
89700	201.3 to 202.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
89712	213.3 to 215.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
89713	215.3 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
89701	216.2 to 217.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
89721	217.0 to 237.3 feet	Key Note Segment		5 ft	102			
89714	237.8 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110904	PEANUT DR	TOSCHI DR	BERRY DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89715	242.1 to 258.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,780**

TOTAL COST FOR: N *side of* **PEANUT DR** *Starting at:* **TOSCHI DR** **$56,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2110181456	PEAR CT	845 PEAR CT	PEAR ST	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72187	1.6 to 7.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,348**
72188	10.4 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**

TOTAL COST FOR: NW *side of* **PEAR CT** *Starting at:* **845 PEAR CT** **$4,536.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110181455	PEAR CT	PEAR ST	855 PEAR CT	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72179	2.5 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,314**
72183	21.6 to 45.8 feet	Key Note Segment		5 ft	109			
72184	57.3 to 77.7 feet	Key Note Segment		5 ft	92			
72177	58.0 to 59.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
72180	78.5 to 80.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$306**
72181	80.2 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
72185	82.0 to 102.4 feet	Key Note Segment		5 ft	92			
72182	109.8 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
72186	123.1 to 144.0 feet	Key Note Segment		5 ft	94			
72178	144.3 to 145.3 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S/E/N *side of* **PEAR CT** *Starting at:* **PEAR ST** **$13,752.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181504	PEAR ST	814 PEAR ST	904 PEAR ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72229	0.0 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,228**
72220	17.3 to 18.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
72230	31.6 to 32.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
72247	32.7 to 54.2 feet	Key Note Segment		5 ft	97			
72221	32.9 to 33.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
72222	43.8 to 44.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
72231	55.8 to 57.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
72248	58.3 to 79.8 feet	Key Note Segment		5 ft	97			
72223	69.3 to 70.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
72232	80.4 to 90.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	44	SF	$40	**$1,764**
72233	93.5 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,856**
72224	104.9 to 105.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
72225	110.5 to 111.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$338**
72234	113.1 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
72235	116.6 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
72249	118.3 to 140.4 feet	Key Note Segment		5 ft	99			
72236	142.3 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72250	144.3 to 166.0 feet	Key Note Segment		5 ft	98			
72226	155.4 to 156.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
72237	166.8 to 169.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
72238	172.8 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
72239	185.7 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
72240	196.0 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,212**
72251	204.7 to 226.5 feet	Key Note Segment		5 ft	98			
72227	215.9 to 216.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
72252	230.5 to 252.3 feet	Key Note Segment		5 ft	98			
72228	252.1 to 253.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
72241	253.4 to 277.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,230**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181504	PEAR ST	814 PEAR ST	904 PEAR ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72242	284.9 to 287.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
72253	291.1 to 312.2 feet	Key Note Segment		5 ft	95			
72243	314.3 to 317.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
72254	317.1 to 338.6 feet	Key Note Segment		5 ft	97			
72244	342.8 to 345.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
72245	349.4 to 353.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
72246	364.3 to 367.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**

TOTAL COST FOR: SW *side of* **PEAR ST** *Starting at:* **814 PEAR ST** **$64,579.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181506	PEAR ST	914 PEAR ST	KIWI ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72258	0.0 to 1.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$972**
72259	4.7 to 9.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	23	SF	$120	**$2,754**
72260	12.8 to 15.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	11	SF	$120	**$1,350**
72261	22.0 to 26.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
72262	29.5 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**
72255	35.2 to 36.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
72263	36.4 to 46.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,562**
72264	46.8 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
72271	48.6 to 70.5 feet	Key Note Segment		5 ft	99			
72256	49.1 to 50.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
72257	70.2 to 71.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
72265	73.8 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,210**
72266	88.0 to 94.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,294**
72267	94.8 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,858**
72268	109.9 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
72269	113.8 to 117.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
72270	118.7 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,778**

TOTAL COST FOR: SW *side of* **PEAR ST** *Starting at:* **914 PEAR ST** **$43,956.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191458	PEAR ST	APPLE ST	E ALMOND AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74679	0.0 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
74662	3.1 to 4.1 feet	**Vertical Change**	.41"	5 ft	4	REF		
74680	8.2 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
74715	10.3 to 31.8 feet	Key Note Segment		5 ft	97			
74663	20.9 to 21.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
74664	31.5 to 32.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
74716	35.8 to 57.5 feet	Key Note Segment		5 ft	98			
74665	48.8 to 49.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
74681	62.0 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,992**
74682	80.0 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,916**
74683	87.6 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
74684	93.9 to 98.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,214**
74717	98.3 to 120.6 feet	Key Note Segment		5 ft	100			
74685	121.1 to 124.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$666**
74718	124.8 to 146.5 feet	Key Note Segment		5 ft	98			
74686	147.3 to 160.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,858**
74667	160.6 to 161.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
74687	160.7 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,294**
74688	167.2 to 175.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
74668	172.9 to 173.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
74689	175.8 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
74690	180.8 to 184.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
74719	184.4 to 206.4 feet	Key Note Segment		5 ft	99			
74691	207.2 to 209.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
74720	210.0 to 232.1 feet	Key Note Segment		5 ft	99			
74669	232.3 to 233.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
74692	235.6 to 238.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
74693	243.6 to 244.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191458	PEAR ST	APPLE ST	E ALMOND AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74694	248.2 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,236**
74695	264.8 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
74721	270.3 to 292.8 feet	Key Note Segment		5 ft	101			
74671	271.4 to 272.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
74722	297.4 to 319.1 feet	Key Note Segment		5 ft	98			
74672	297.7 to 298.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
74696	330.8 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
74697	338.1 to 340.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
74698	341.6 to 345.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,268**
74699	350.2 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
74700	353.5 to 359.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,970**
74723	359.0 to 380.8 feet	Key Note Segment		5 ft	98			
74673	380.5 to 381.5 feet	**Vertical Change**	-.53"	5 ft	5	REF		
74701	382.8 to 384.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,026**
74724	384.7 to 408.2 feet	Key Note Segment		5 ft	106			
74674	385.5 to 386.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
74702	408.2 to 426.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	84	SF	$40	**$3,348**
74703	427.3 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,268**
74704	432.8 to 443.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,670**
74725	445.1 to 466.8 feet	Key Note Segment		5 ft	98			
74705	468.3 to 471.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
74726	471.4 to 492.7 feet	Key Note Segment		5 ft	96			
74706	495.2 to 497.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
74707	500.0 to 510.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,562**
74675	507.7 to 508.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
74708	510.3 to 531.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,556**
74676	520.3 to 521.3 feet	**Vertical Change**	-.42"	5 ft	5	REF		
74727	531.7 to 553.3 feet	Key Note Segment		5 ft	97			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191458	PEAR ST	APPLE ST	E ALMOND AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74709	555.3 to 556.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
74728	557.5 to 578.8 feet	Key Note Segment		5 ft	96			
74677	568.4 to 569.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
74710	580.4 to 584.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
74711	584.3 to 586.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$972**
74678	591.3 to 592.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
74712	592.0 to 598.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,456**
74713	600.5 to 601.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
74729	601.7 to 623.6 feet	Key Note Segment		5 ft	99			
74714	625.8 to 628.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,350**
74730	633.5 to 635.5 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **PEAR ST** *Starting at:* **APPLE ST** **$99,864.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191502	PEAR ST	E ALMOND AVE	MADARIN ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74731	0.7 to 1.7 feet	Vertical Change	.26"	5 ft	5	REF		
74736	0.8 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
74737	2.8 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$648
74753	7.1 to 28.9 feet	Key Note Segment		5 ft	98			
74732	7.2 to 8.2 feet	Vertical Change	.31"	5 ft	4	REF		
74733	29.2 to 30.2 feet	Vertical Change	.32"	5 ft	5	REF		
74738	30.1 to 32.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,458
74754	34.1 to 55.9 feet	Key Note Segment		5 ft	98			
74739	59.5 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,916
74740	66.3 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,754
74734	75.6 to 76.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$338
74741	77.3 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$648
74742	79.9 to 83.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,944
74743	86.2 to 87.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$540
74744	93.6 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
74745	98.6 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,242
74755	101.0 to 122.3 feet	Key Note Segment		5 ft	96			
74746	124.6 to 125.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$648
74747	125.8 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$702
74756	127.3 to 148.4 feet	Key Note Segment		5 ft	95			
74748	149.0 to 157.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,590
74749	161.3 to 176.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	$8,154
74750	178.8 to 191.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	$7,074
74757	192.7 to 213.7 feet	Key Note Segment		5 ft	95			
74735	214.0 to 215.0 feet	Vertical Change	.27"	5 ft	5	REF		
74758	218.6 to 239.4 feet	Key Note Segment		5 ft	94			
74751	240.7 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,674
74752	244.3 to 246.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,350

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191502	PEAR ST	E ALMOND AVE	MADARIN ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **PEAR ST**	*Starting at:* **E ALMOND AVE**						**$40,459.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2110181501	PEAR ST	E ALMOND AVE	814 PEAR ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72214	1.2 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
72215	5.3 to 9.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,214**
72217	9.5 to 32.3 feet	Key Note Segment		5 ft	103			
72216	32.9 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,242**
72218	36.1 to 57.3 feet	Key Note Segment		5 ft	95			
72213	57.3 to 58.3 feet	**Vertical Change**	.62"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **PEAR ST** *Starting at:* **E ALMOND AVE** **$5,454.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181453	PEAR ST	KIWI ST	PEAR CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72157	1.1 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
72151	3.7 to 4.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
72158	4.3 to 16.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,804**
72159	18.7 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
72160	22.4 to 38.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,856**
72161	38.8 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
72153	39.4 to 40.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
72162	49.3 to 51.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,296**
72163	56.4 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
72164	60.2 to 70.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,346**
72165	70.6 to 107.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,872**
72166	111.2 to 113.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
72174	113.8 to 136.8 feet	Key Note Segment		5 ft	104			
72154	125.8 to 126.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
72167	137.1 to 144.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	35	SF	$40	**$1,386**
72168	144.8 to 146.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
72169	149.0 to 161.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,588**
72170	161.3 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,452**
72155	166.1 to 167.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
72171	175.1 to 176.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$918**
72172	178.8 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,656**
72173	219.8 to 223.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,836**
72156	221.4 to 222.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
72175	221.7 to 223.2 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: NE *side of* **PEAR ST** *Starting at:* **KIWI ST** **$89,946.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191528	PEAR ST	MADARIN ST	APPLE ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74921	0.3 to 1.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$338
74927	3.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,782
74937	14.8 to 35.9 feet	Key Note Segment		5 ft	95			
74922	25.8 to 26.8 feet	Vertical Change	-.32"	5 ft	5	REF		
74928	37.8 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,458
74938	40.5 to 62.1 feet	Key Note Segment		5 ft	97			
74929	63.5 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	$17,712
74939	96.3 to 118.3 feet	Key Note Segment		5 ft	99			
74930	119.5 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$702
74940	123.2 to 144.3 feet	Key Note Segment		5 ft	95			
74923	144.4 to 145.4 feet	Vertical Change	.31"	5 ft	5	REF		
74931	146.1 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	$16,308
74941	179.3 to 200.8 feet	Key Note Segment		5 ft	97			
74924	196.7 to 197.7 feet	Vertical Change	.98"	5 ft	5	REF		
74932	201.9 to 204.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,512
74942	204.7 to 226.3 feet	Key Note Segment		5 ft	97			
74925	226.1 to 227.1 feet	Vertical Change	.26"	5 ft	5	REF		
74933	227.8 to 242.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,884
74943	243.2 to 264.3 feet	Key Note Segment		5 ft	95			
74934	265.6 to 285.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	$10,962
74935	291.4 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,292
74944	301.2 to 322.4 feet	Key Note Segment		5 ft	95			
74926	322.5 to 323.5 feet	Vertical Change	-.26"	5 ft	5	REF		
74936	322.5 to 323.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$198

TOTAL COST FOR: E *side of* **PEAR ST** *Starting at:* **MADARIN ST** **$64,147.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2110181458	PEAR ST	PEAR CT	E ALMOND AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72199	1.3 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,688**
72189	11.1 to 12.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$338**
72190	23.9 to 24.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
72200	31.3 to 54.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,636**
72191	36.8 to 37.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
72192	49.5 to 50.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
72201	54.8 to 58.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,106**
72202	59.3 to 69.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,562**
72203	70.3 to 77.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,888**
72193	75.0 to 76.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
72204	78.3 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
72205	81.8 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,314**
72194	87.6 to 88.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
72211	101.8 to 123.0 feet	Key Note Segment		5 ft	95			
72195	102.2 to 103.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
72196	113.0 to 114.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
72206	123.6 to 134.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,616**
72207	135.2 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,764**
72208	174.3 to 183.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,184**
72209	188.0 to 196.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,374**
72197	190.4 to 191.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
72210	196.7 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
72198	203.5 to 204.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: NE *side of* **PEAR ST** *Starting at:* **PEAR CT** **$88,641.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201110859	PEAR TREE DR	BERRY DR	TOSCHI DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89655	0.3 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
89656	1.8 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
89657	14.0 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
89670	17.0 to 37.3 feet	Key Note Segment		5 ft	101			
89648	27.9 to 28.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
89671	42.8 to 64.0 feet	Key Note Segment		5 ft	106			
89649	60.5 to 61.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
89658	64.7 to 65.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
89659	65.8 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
89660	69.8 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
89661	83.3 to 84.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
89662	87.2 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
89663	93.2 to 102.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
89672	103.7 to 124.1 feet	Key Note Segment		5 ft	102			
89664	125.6 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
89673	129.7 to 149.4 feet	Key Note Segment		5 ft	99			
89650	140.6 to 141.6 feet	**Vertical Change**	.59"	5 ft	5	REF		
89665	151.3 to 177.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,600**
89651	158.5 to 159.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
89652	180.5 to 181.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
89666	180.6 to 189.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
89674	189.6 to 210.6 feet	Key Note Segment		5 ft	105			
89667	212.0 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
89675	221.7 to 242.7 feet	Key Note Segment		5 ft	105			
89668	243.6 to 247.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
89654	243.9 to 244.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
89669	251.0 to 257.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,140**

TOTAL COST FOR: S *side of* **PEAR TREE DR** *Starting at:* **BERRY DR** **$55,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221117	PEAR TREE DR	HAZELNUT DR	LEMON TREE DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81362	0.9 to 1.9 feet	Vertical Change	-.26"	5 ft	5	REF		
81364	1.5 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
81365	8.3 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81366	15.6 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
81367	22.4 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
81368	47.1 to 53.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
81369	56.4 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
81370	64.7 to 104.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	200	SF	$120	**$23,940**
81371	106.7 to 149.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	215	SF	$120	**$25,800**
81363	149.5 to 150.5 feet	Vertical Change	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PEAR TREE DR** *Starting at:* **HAZELNUT DR** **$80,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221115	PEAR TREE DR	LEMON TREE DR	HAZELNUT DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81340	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
81341	5.8 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
81356	19.3 to 40.5 feet	Key Note Segment		5 ft	106			
81342	43.0 to 44.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
81343	51.6 to 63.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
81357	65.8 to 86.9 feet	Key Note Segment		5 ft	106			
81334	66.5 to 67.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
81344	87.5 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81345	90.1 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
81358	91.8 to 112.3 feet	Key Note Segment		5 ft	103			
81335	110.6 to 111.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
81346	113.6 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
81347	119.8 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
81348	128.4 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
81349	130.9 to 138.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
81350	142.8 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81351	152.3 to 154.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
81359	156.6 to 177.2 feet	Key Note Segment		5 ft	103			
81336	176.4 to 177.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
81352	179.4 to 182.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
81360	182.8 to 205.3 feet	Key Note Segment		5 ft	113			
81353	206.0 to 226.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,060**
81337	217.7 to 218.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
81361	229.5 to 249.6 feet	Key Note Segment		5 ft	101			
81338	239.3 to 240.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
81354	250.3 to 263.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	65	SF	$40	**$2,580**
81355	265.8 to 271.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
81339	271.8 to 272.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221115	PEAR TREE DR	LEMON TREE DR	HAZELNUT DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **PEAR TREE DR**	*Starting at:* **LEMON TREE DR**					**$52,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110221109	PEAR TREE DR	PEACH TREE DR	LEMON TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81306	0.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
81307	8.8 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
81308	11.0 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
81314	20.6 to 39.1 feet	Key Note Segment		5 ft	93			
81309	40.7 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
81310	48.0 to 52.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
81311	52.8 to 63.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
81312	64.2 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
81315	68.9 to 109.0 feet	Key Note Segment		5 ft	200			
81304	69.5 to 70.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
81305	82.0 to 83.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
81313	110.1 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **PEAR TREE DR** *Starting at:* **PEACH TREE DR** **$25,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110221010	PEAR TREE DR	TOSCHI DR	TOSCHI DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80662	0.1 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
80673	3.6 to 22.8 feet	Key Note Segment		5 ft	96			
80658	15.0 to 16.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
80663	23.2 to 24.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
80664	24.2 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80665	30.2 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
80666	39.9 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
80674	42.3 to 61.6 feet	Key Note Segment		5 ft	97			
80667	63.4 to 77.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
80668	77.4 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
80675	87.0 to 106.1 feet	Key Note Segment		5 ft	96			
80659	104.1 to 105.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
80669	108.1 to 113.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
80676	113.2 to 132.3 feet	Key Note Segment		5 ft	96			
80670	133.7 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80671	138.3 to 144.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
80672	145.8 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80661	157.8 to 158.8 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PEAR TREE DR** *Starting at:* **TOSCHI DR** **$36,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201110935	PEAR TREE DR	TOSCHI DR	BERRY DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90000	0.0 to 7.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
90001	8.4 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
89997	10.3 to 11.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
90007	21.0 to 40.7 feet	Key Note Segment		5 ft	99			
89998	24.5 to 25.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
90002	42.7 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
90008	47.8 to 66.3 feet	Key Note Segment		5 ft	93			
90003	71.9 to 83.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$7,020**
90004	83.6 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
90009	92.4 to 118.6 feet	Key Note Segment		5 ft	131			
90005	121.6 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
90006	135.7 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
89999	137.2 to 138.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PEAR TREE DR** *Starting at:* **TOSCHI DR** **$32,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191545	PECAN AVE	1150 PECAN AVE	1150 PECAN AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104277	5.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
104266	7.0 to 8.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
104267	9.6 to 10.6 feet	**Vertical Change**	-.57"	5 ft	5	REF		
104268	15.6 to 16.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
104269	24.3 to 25.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
104278	40.6 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
104270	48.4 to 49.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
104271	52.5 to 53.5 feet	**Vertical Change**	-.57"	5 ft	5	REF		
104279	53.4 to 56.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
104272	55.6 to 56.6 feet	**Vertical Change**	.62"	5 ft	5	REF		
104273	59.6 to 60.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104280	59.7 to 64.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
104281	64.7 to 74.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
104282	76.2 to 91.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
104283	91.6 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
104284	102.8 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
104285	112.3 to 132.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
104274	137.1 to 138.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
104286	138.9 to 171.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	162	SF	$120	**$19,440**
104275	145.7 to 146.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
104276	148.5 to 149.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **1150 PECAN AVE** **$84,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191546	PECAN AVE	1150 PECAN AVE	1150 PECAN AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104287	0.1 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	222	SF	$120	**$26,676**
104288	17.5 to 26.6 feet	Cross Slope (PAR)	4.0-5.0%	13 ft	118	SF	$120	**$14,196**

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **1150 PECAN AVE** **$40,872.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191549	PECAN AVE	1150 PECAN AVE	1150 PECAN AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104301	0.9 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
104302	20.9 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
104303	25.8 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
104290	34.1 to 35.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
104291	53.0 to 54.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
104304	56.4 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
104305	70.3 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
104306	80.8 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
104307	92.3 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
104292	104.7 to 105.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
104308	116.9 to 119.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
104309	120.2 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
104293	121.3 to 122.3 feet	**Vertical Change**	2.33"	5 ft	5	REF		
104294	124.1 to 125.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
104310	134.2 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
104295	139.1 to 140.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		
104311	144.0 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	223	SF	$120	**$26,760**
104296	152.9 to 153.9 feet	**Vertical Change**	-.45"	5 ft	5	REF		
104297	156.3 to 157.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104298	173.6 to 174.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
104299	182.2 to 183.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
104312	193.3 to 195.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
104313	197.8 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
104314	202.0 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
104315	207.6 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
104300	216.6 to 217.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **1150 PECAN AVE** **$82,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211538	PECAN AVE	1440 MADERA AVE	COLOMBARD DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80311	2.3 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
80312	7.6 to 29.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**
80313	32.3 to 38.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	29	SF	$120	**$3,480**
80314	39.6 to 43.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
80315	43.9 to 45.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
80309	44.7 to 45.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
80316	45.1 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
80317	67.3 to 68.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
80318	71.9 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,180**
80319	82.8 to 92.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	50	SF	$120	**$6,000**
80320	94.9 to 97.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
80310	95.0 to 96.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
80321	98.0 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
80322	118.2 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **1440 MADERA AVE** **$56,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211418	PECAN AVE	705 PECAN AVE	705 PECAN AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79879	0.0 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
79880	7.5 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,240**
79877	13.4 to 14.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
79881	42.9 to 53.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
79882	55.8 to 78.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	**$13,560**
79883	80.8 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
79884	84.7 to 88.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
79885	91.0 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
79886	105.4 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,960**
79878	144.6 to 145.6 feet	**Vertical Change**	.62"	5 ft	5	REF		
79887	149.6 to 150.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
79888	155.6 to 165.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
79889	167.5 to 168.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
79890	168.8 to 169.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
79891	169.9 to 176.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
79892	176.1 to 197.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,080**
79893	199.2 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
79894	203.2 to 213.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **705 PECAN AVE** **$114,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281233	PECAN AVE	804 MORRIS LANE	WATT ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112738	1.6 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
112739	21.3 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
112740	28.1 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
112741	33.4 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
112742	40.9 to 42.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
112715	47.6 to 48.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
112743	51.6 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
112744	57.3 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
112745	65.3 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
112746	93.1 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
112747	103.2 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
112748	106.6 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
112749	115.5 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
112750	133.3 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
112751	145.2 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
112752	148.8 to 155.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
112753	156.6 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
112716	178.7 to 179.7 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
112754	180.9 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
112717	184.2 to 185.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
112755	189.3 to 207.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
112718	208.2 to 209.2 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
112756	214.4 to 217.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
112757	220.3 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
112758	228.0 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
112759	231.3 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
112760	245.1 to 248.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
112761	250.9 to 282.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281233	PECAN AVE	804 MORRIS LANE	WATT ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112720	276.5 to 277.5 feet	Vertical Change	.31"	5 ft	5	REF		
112762	287.0 to 288.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
112763	291.9 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
112764	299.0 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,780
112721	301.2 to 302.2 feet	Vertical Change	.32"	5 ft	5	REF		
112722	305.6 to 306.6 feet	Vertical Change	.97"	5 ft	5	REF		
112765	315.1 to 317.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,260
112766	329.6 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
112767	337.3 to 345.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
112723	338.2 to 339.2 feet	Vertical Change	.6"	5 ft	5	REF		
112724	346.1 to 347.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
112768	350.4 to 352.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
112725	357.8 to 360.9 feet	Vertical Change	.3"	5 ft	16	LF	$75	$1,163
112769	370.2 to 390.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	$12,060
112770	392.5 to 394.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
112771	394.3 to 396.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
112772	405.3 to 434.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	$17,640
112773	447.7 to 459.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
112774	465.2 to 502.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	$22,260
112775	503.4 to 504.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
112776	507.6 to 514.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$4,020
112726	510.8 to 511.8 feet	Vertical Change	-.42"	5 ft	5	REF		
112777	514.8 to 517.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
112727	516.6 to 517.6 feet	Vertical Change	.98"	5 ft	5	REF		
112778	523.5 to 531.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
112728	529.2 to 530.2 feet	Vertical Change	.94"	5 ft	5	SF	$75	$375
112779	535.5 to 537.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
112780	539.7 to 542.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281233	PECAN AVE	804 MORRIS LANE	WATT ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112781	554.3 to 559.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
112782	562.9 to 566.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
112783	569.6 to 571.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
112784	578.3 to 581.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
112730	581.2 to 582.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
112785	584.8 to 587.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
112786	594.8 to 603.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
112731	603.6 to 604.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
112787	606.3 to 608.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
112788	611.7 to 625.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,460**
112732	613.5 to 614.5 feet	**Vertical Change**	1.06"	5 ft	5	REF		
112733	618.4 to 619.4 feet	**Vertical Change**	1"	5 ft	5	REF		
112789	626.3 to 631.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
112790	633.3 to 634.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
112734	635.1 to 636.1 feet	**Vertical Change**	1.04"	5 ft	5	SF	$75	**$375**
112791	639.3 to 652.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
112735	649.7 to 650.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
112792	655.0 to 668.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
112736	655.3 to 656.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
112793	672.4 to 689.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
112794	691.3 to 698.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
112800	701.0 to 728.7 feet	Key Note Segment		5 ft	139			
112795	733.3 to 735.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
112796	736.4 to 738.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
112797	741.8 to 750.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
112798	752.0 to 755.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
112799	756.5 to 779.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
112737	774.7 to 775.7 feet	**Vertical Change**	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201281233	PECAN AVE	804 MORRIS LANE	WATT ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **PECAN AVE**	*Starting at:* **804 MORRIS LANE**					**$299,287.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191610	PECAN AVE	BARNETT WAY	RAYMOND THOMAS ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104352	0.3 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
104353	6.8 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
104354	14.6 to 22.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
104355	23.7 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
104356	29.2 to 32.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
104357	38.8 to 40.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
104358	44.9 to 51.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
104359	52.8 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
104360	60.3 to 64.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
104343	63.3 to 64.3 feet	**Vertical Change**	2.16"	5 ft	5	REF		
104361	66.1 to 67.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
104362	68.0 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
104363	75.3 to 84.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
104364	87.7 to 91.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
104365	92.0 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
104366	108.8 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
104367	136.2 to 138.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
104368	139.6 to 141.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
104369	146.1 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
104370	163.2 to 204.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,720**
104344	188.0 to 189.0 feet	**Vertical Change**	.64"	5 ft	5	REF		
104345	196.3 to 197.3 feet	**Vertical Change**	.85"	5 ft	5	REF		
104371	207.3 to 218.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
104372	220.3 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
104373	225.4 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
104374	240.7 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
104375	247.5 to 259.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
104376	263.3 to 275.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191610	PECAN AVE	BARNETT WAY	RAYMOND THOMAS ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104347	267.9 to 268.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
104377	278.1 to 280.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
104378	280.1 to 292.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
104348	295.7 to 296.7 feet	**Vertical Change**	1.29"	5 ft	5	SF	$75	**$375**
104379	297.3 to 298.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
104349	302.3 to 303.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
104380	305.8 to 306.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
104350	308.1 to 309.1 feet	**Vertical Change**	3.47"	5 ft	5	SF	$75	**$375**
104381	309.7 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
104351	318.4 to 319.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **BARNETT WAY** **$134,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211540	PECAN AVE	COLOMBARD DR	SENECA DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80324	2.4 to 14.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
80325	14.3 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
80326	21.9 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
80327	29.7 to 33.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
80328	33.9 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
80329	41.5 to 48.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
80330	50.9 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
80323	63.0 to 64.0 feet	**Vertical Change**	.57"	5 ft	5	REF		
80331	63.8 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80332	85.6 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
80333	98.2 to 119.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
80334	119.7 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
80335	138.5 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80336	152.5 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **COLOMBARD DR** **$57,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211549	PECAN AVE	CONCORD CT	MONTEREY ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80392	1.0 to 6.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
80393	6.9 to 10.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
80394	11.4 to 15.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
80395	16.1 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
80396	39.9 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
80397	43.8 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
80398	60.8 to 66.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
80399	68.6 to 71.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
80400	73.9 to 85.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,780**
80405	85.2 to 108.6 feet	Key Note Segment		5 ft	117			
80401	112.2 to 143.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	155	SF	$120	**$18,540**
80402	145.3 to 150.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
80406	150.8 to 171.3 feet	Key Note Segment		5 ft	102			
80403	171.8 to 176.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
80404	179.8 to 181.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **CONCORD CT** **$59,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151103	PECAN AVE	DRIVEWAY	ROAD 25 1/2	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81801	0.3 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
81792	7.8 to 8.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
81802	12.1 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81793	20.8 to 21.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
81803	25.6 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
81804	45.3 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
81805	53.1 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
81806	59.1 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
81794	60.3 to 61.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
81807	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81808	78.3 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
81831	79.3 to 80.8 feet		5.0-6.0%	5 ft	8			
81809	87.3 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
81810	98.2 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
81811	142.9 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
81812	151.4 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
81796	163.1 to 164.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
81813	170.6 to 179.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
81814	186.3 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81815	192.6 to 200.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
81816	208.2 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81817	230.8 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
81797	235.3 to 236.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
81818	257.0 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
81819	274.5 to 279.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
81798	292.4 to 293.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
81820	295.8 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81821	302.4 to 306.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151103	PECAN AVE	DRIVEWAY	ROAD 25 1/2	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81822	310.4 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
81823	322.4 to 324.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
81799	325.9 to 326.9 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
81824	327.0 to 329.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81825	337.3 to 341.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81826	345.4 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
81827	362.7 to 363.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81828	375.9 to 378.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
81829	381.4 to 384.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
81800	384.4 to 385.4 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
81830	399.1 to 400.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **DRIVEWAY** **$93,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151120	PECAN AVE	DRIVEWAY	DRIVEWAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81875	8.9 to 9.9 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
81884	15.2 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
81885	34.9 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
81886	41.4 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
81887	57.1 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
81888	66.8 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
81889	85.4 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
81890	97.4 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
81876	100.1 to 101.1 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
81891	103.2 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
81892	109.8 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
81893	116.3 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
81894	123.0 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
81877	125.9 to 126.9 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
81895	131.8 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
81896	143.3 to 147.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
81897	151.4 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
81898	159.3 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
81899	163.9 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
81878	164.6 to 165.6 feet	Vertical Change	.55"	5 ft	5	REF		
81879	177.1 to 178.1 feet	Vertical Change	1.23"	5 ft	5	SF	$75	$375
81900	178.9 to 183.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
81901	185.8 to 186.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
81902	187.5 to 189.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,080
81903	190.8 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	$8,880
81880	201.6 to 202.6 feet	Vertical Change	1.51"	5 ft	5	REF		
81881	203.4 to 204.4 feet	Vertical Change	.44"	5 ft	5	REF		
81904	214.9 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151120	PECAN AVE	DRIVEWAY	DRIVEWAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81905	226.2 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
81906	235.4 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
81907	278.3 to 284.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
81882	295.6 to 296.6 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
81908	319.6 to 325.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **DRIVEWAY** **$62,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151123	PECAN AVE	DRIVEWAY	VICTORY LANE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81914	0.5 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
81909	6.0 to 7.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
81915	12.2 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81910	16.6 to 17.6 feet	**Vertical Change**	1.09"	5 ft	5	SF	$75	**$375**
81916	22.8 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81917	28.9 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
81911	33.9 to 34.9 feet	**Vertical Change**	1.32"	5 ft	5	SF	$75	**$375**
81918	37.0 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
81919	48.8 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81920	62.8 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
81921	80.4 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
81922	86.6 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
81923	112.8 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
81924	118.1 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
81925	123.8 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
81926	130.6 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
81927	142.7 to 144.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
81928	144.7 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81929	175.3 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
81930	184.1 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
81912	186.6 to 187.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
81931	192.0 to 195.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81932	198.8 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
81933	209.9 to 211.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
81913	257.6 to 258.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **DRIVEWAY** **$51,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211536	PECAN AVE	MADERA AVE	PARKING LOT ENTRANCE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80297	0.8 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
80298	1.8 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
80289	8.9 to 9.9 feet	**Vertical Change**	-.65"	5 ft	5	REF		
80290	11.5 to 12.5 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
80299	15.7 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
80291	25.8 to 26.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
80300	27.5 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
80292	27.8 to 28.8 feet	**Vertical Change**	-.63"	5 ft	5	REF		
80293	30.9 to 31.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
80301	41.1 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
80302	52.3 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
80303	85.0 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
80308	91.3 to 126.3 feet	Key Note Segment		5 ft	175			
80295	92.1 to 93.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
80304	126.3 to 127.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
80305	131.4 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
80296	141.7 to 142.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
80306	147.8 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
80307	163.0 to 165.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **MADERA AVE** **$49,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211310	PECAN AVE	MUNRAS AVE	1501 MUNRAS AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79480	0.4 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
79481	6.0 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
79482	19.1 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
79483	25.6 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
79484	30.6 to 32.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
79485	34.1 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
79486	42.3 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79487	47.9 to 49.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
79488	49.3 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79489	52.7 to 56.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
79490	56.7 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79478	57.6 to 58.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
79479	66.5 to 67.5 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
79491	73.5 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **MUNRAS AVE** **$23,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151116	PECAN AVE	PINE ST	DRIVEWAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81832	4.9 to 5.9 feet	Vertical Change	.84"	5 ft	5	REF		
81845	5.1 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
81846	16.8 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
81847	30.2 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
81848	35.3 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
81833	40.9 to 41.9 feet	Vertical Change	.42"	5 ft	5	REF		
81849	41.1 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
81850	45.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
81834	56.6 to 57.6 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
81851	66.3 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
81835	69.6 to 70.6 feet	Vertical Change	-.27"	5 ft	5	REF		
81852	77.1 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
81853	78.7 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
81854	88.1 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
81855	101.5 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
81856	129.7 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
81857	141.0 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
81836	147.3 to 148.3 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
81858	157.5 to 159.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
81837	167.9 to 168.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
81859	171.9 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
81838	173.1 to 174.1 feet	Vertical Change	.65"	5 ft	5	REF		
81860	189.8 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
81839	199.0 to 200.0 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
81861	202.2 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
81862	207.1 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
81863	215.9 to 217.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
81864	218.3 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151116	PECAN AVE	PINE ST	DRIVEWAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81865	229.1 to 235.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
81840	238.4 to 239.4 feet	**Vertical Change**	3.13"	5 ft	5	SF	$75	**$375**
81841	246.9 to 247.9 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
81866	250.3 to 252.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
81842	250.6 to 251.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
81867	252.8 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
81868	265.3 to 268.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
81869	273.1 to 279.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
81843	286.0 to 287.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
81870	289.8 to 294.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
81871	303.2 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
81872	315.2 to 321.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
81873	325.9 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
81844	326.2 to 327.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
81874	331.1 to 335.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **PINE ST** **$70,185.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191604	PECAN AVE	RAYMOND THOMAS ST	VALENCIA AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104320	1.1 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,720**
104316	1.6 to 2.6 feet	Vertical Change	3.17"	5 ft	5	REF		
104321	27.4 to 35.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
104322	46.7 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
104323	61.1 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
104324	71.9 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
104325	80.7 to 83.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
104326	84.5 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
104327	103.1 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
104328	110.5 to 112.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	**$460**
104329	118.8 to 146.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	139	SF	$40	**$5,540**
104317	129.6 to 130.6 feet	Vertical Change	3.46"	5 ft	5	REF		
104330	148.9 to 178.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
104318	177.8 to 178.8 feet	Vertical Change	-.28"	5 ft	5	REF		
104331	189.6 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,320**
104332	229.9 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
104333	246.5 to 250.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
104334	253.2 to 258.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
104335	261.0 to 269.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
104336	269.8 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
104337	273.6 to 274.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
104338	274.8 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
104339	285.0 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
104340	297.7 to 320.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
104319	303.3 to 304.3 feet	Vertical Change	.93"	5 ft	5	REF		
104341	323.5 to 325.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
104342	325.0 to 326.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **RAYMOND THOMAS ST** **$124,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211543	PECAN AVE	SENECA DR	CONCORD CT	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80343	0.8 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
80344	10.5 to 16.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
80338	13.9 to 14.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
80345	18.7 to 34.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
80339	22.3 to 23.3 feet	**Vertical Change**	.94"	5 ft	5	REF		
80346	41.3 to 43.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
80340	42.3 to 43.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
80347	43.3 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
80348	51.2 to 57.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
80349	62.8 to 65.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
80350	67.3 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
80341	73.7 to 74.7 feet	**Vertical Change**	.52"	5 ft	5	REF		
80351	90.5 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
80352	118.2 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
80342	122.9 to 123.9 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **SENECA DR** **$66,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211414	PECAN AVE	STADIUM RD	PARKING LOT ENTRANCE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79855	0.0 to 9.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
79850	6.0 to 7.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
79856	9.3 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79851	15.6 to 19.0 feet	**Vertical Change**	-.26"	5 ft	17	LF	$75	**$1,275**
79857	17.8 to 22.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
79858	22.9 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
79859	34.8 to 58.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
79852	50.2 to 51.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
79860	61.8 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
79861	65.6 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
79862	99.8 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	248	SF	$120	**$29,700**
79863	149.3 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
79864	165.1 to 174.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
79865	175.7 to 181.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
79866	181.1 to 194.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
79867	197.6 to 212.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
79853	212.0 to 213.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
79868	213.6 to 230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
79869	232.8 to 239.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
79870	240.2 to 243.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79871	244.6 to 247.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
79872	247.4 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
79854	266.0 to 269.2 feet	**Vertical Change**	-.32"	5 ft	16	REF		
79873	266.4 to 269.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
79874	272.8 to 280.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
79875	283.5 to 300.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
79876	300.7 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **STADIUM RD** **$175,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211308	PECAN AVE	STADIUM RD	MUNRAS AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79451	1.8 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79452	6.0 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
79453	10.8 to 28.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
79454	28.3 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
79455	36.0 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
79456	39.8 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
79457	48.3 to 67.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
79458	67.1 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
79449	86.9 to 87.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
79459	86.9 to 90.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
79460	100.0 to 117.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
79461	119.3 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
79462	126.0 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
79463	133.9 to 149.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
79464	151.3 to 161.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
79465	161.8 to 178.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,140**
79466	181.8 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
79467	204.6 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
79468	221.3 to 224.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
79469	226.4 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
79470	248.7 to 249.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
79471	250.8 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79472	254.9 to 263.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
79473	265.8 to 278.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
79474	281.1 to 292.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
79475	294.9 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
79476	315.0 to 320.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
79450	333.4 to 334.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211308	PECAN AVE	STADIUM RD	MUNRAS AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79477	337.5 to 357.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **STADIUM RD** **$169,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191542	PECAN AVE	VALENCIA AVE	1097 PECAN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104241	0.3 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
104242	4.8 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
104231	11.5 to 12.5 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
104243	13.2 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
104232	14.7 to 15.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
104244	39.3 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
104245	54.8 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
104246	71.8 to 76.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
104247	80.5 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104248	81.5 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
104233	123.7 to 124.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
104234	129.2 to 130.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
104249	151.5 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
104235	164.1 to 165.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
104250	183.5 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
104251	199.0 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
104252	209.3 to 218.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
104253	218.0 to 228.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
104254	228.6 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
104255	246.5 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
104256	259.7 to 263.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
104257	266.3 to 269.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
104258	305.1 to 309.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
104259	314.6 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
104236	329.8 to 330.8 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
104260	332.8 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
104261	345.4 to 350.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
104237	367.7 to 368.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191542	PECAN AVE	VALENCIA AVE	1097 PECAN AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104262	388.0 to 392.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
104263	396.5 to 399.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
104238	397.6 to 398.6 feet	**Vertical Change**	.84"	5 ft	5	REF		
104264	402.5 to 437.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
104239	448.2 to 449.2 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
104265	454.5 to 473.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
104240	461.1 to 462.1 feet	**Vertical Change**	3.44"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PECAN AVE** *Starting at:* **VALENCIA AVE** **$150,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151057	PECAN AVE	VICTORY LANE	DRIVEWAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81767	1.0 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
81768	23.8 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81769	56.5 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81770	65.7 to 74.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
81771	83.3 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
81772	92.3 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
81760	97.4 to 98.4 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
81773	99.7 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81774	106.4 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
81775	113.5 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
81776	121.7 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
81761	126.1 to 127.1 feet	**Vertical Change**	3.41"	5 ft	5	SF	$75	**$375**
81777	143.3 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
81762	152.8 to 153.8 feet	**Vertical Change**	.75"	5 ft	5	REF		
81763	167.8 to 168.8 feet	**Vertical Change**	2.47"	5 ft	5	SF	$75	**$375**
81778	171.8 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
81779	181.8 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
81764	187.4 to 188.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
81780	194.0 to 199.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
81781	203.3 to 212.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
81782	219.8 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
81783	229.8 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
81784	252.2 to 276.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
81765	256.0 to 257.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
81766	264.4 to 265.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
81785	282.1 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
81786	287.5 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
81787	297.5 to 298.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151057	PECAN AVE	VICTORY LANE	DRIVEWAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81788	301.8 to 322.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
81789	346.2 to 347.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
81790	352.4 to 368.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
81791	377.2 to 379.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: N *side of* **PECAN AVE** *Starting at:* **VICTORY LANE** **$95,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131146	PEERLESS ST	PADRE ST	SAURET ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62190	16.5 to 38.3 feet	Key Note Segment		5 ft	109			
62173	38.8 to 40.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
62191	42.6 to 64.6 feet	Key Note Segment		5 ft	110			
62174	64.8 to 65.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
62175	66.2 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
62176	72.6 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62177	83.3 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
62165	96.7 to 97.7 feet	Vertical Change	.91"	5 ft	5	SF	$75	**$375**
62178	99.3 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
62192	108.0 to 129.6 feet	Key Note Segment		5 ft	108			
62166	110.3 to 111.3 feet	Vertical Change	2.84"	5 ft	5	REF		
62167	129.4 to 130.4 feet	Vertical Change	.33"	5 ft	5	REF		
62179	130.4 to 136.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	29	SF	$40	**$1,140**
62193	136.1 to 155.8 feet	Key Note Segment		5 ft	99			
62180	156.3 to 157.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$220**
62181	158.6 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
62168	188.1 to 189.1 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
62182	191.8 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
62194	199.3 to 221.3 feet	Key Note Segment		5 ft	110			
62169	211.7 to 212.7 feet	Vertical Change	.36"	5 ft	5	REF		
62183	221.5 to 223.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
62195	225.6 to 246.8 feet	Key Note Segment		5 ft	106			
62184	247.8 to 263.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
62185	263.8 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
62170	281.2 to 282.2 feet	Vertical Change	-.29"	5 ft	5	REF		
62186	287.0 to 290.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
62171	287.5 to 288.5 feet	Vertical Change	.26"	5 ft	5	REF		
62196	291.3 to 312.6 feet	Key Note Segment		5 ft	107			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131146	PEERLESS ST	PADRE ST	SAURET ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62187	313.6 to 314.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
62188	315.2 to 316.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62197	317.4 to 339.5 feet	Key Note Segment		5 ft	111			
62172	328.5 to 329.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
62189	339.6 to 350.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,260**

TOTAL COST FOR: W *side of* **PEERLESS ST** *Starting at:* **PADRE ST** **$48,910.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131149	PEERLESS ST	SAURET ST	PADRE ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62210	0.0 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
62198	1.9 to 2.9 feet	**Vertical Change**	-.53"	5 ft	5	REF		
62228	12.7 to 33.8 feet	Key Note Segment		5 ft	105			
62211	34.8 to 38.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
62229	38.6 to 59.7 feet	Key Note Segment		5 ft	106			
62199	38.8 to 39.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
62212	65.1 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
62200	67.7 to 68.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
62213	75.6 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
62201	75.7 to 76.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
62214	77.2 to 91.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
62215	94.7 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
62230	103.9 to 126.2 feet	Key Note Segment		5 ft	112			
62202	108.5 to 109.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
62216	127.1 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
62231	130.4 to 153.4 feet	Key Note Segment		5 ft	115			
62203	148.9 to 149.9 feet	**Vertical Change**	-.56"	5 ft	5	REF		
62204	153.7 to 154.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
62217	153.8 to 162.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,980**
62205	162.4 to 163.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
62218	162.4 to 180.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
62219	183.9 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
62206	184.5 to 185.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
62232	196.3 to 218.9 feet	Key Note Segment		5 ft	113			
62207	207.9 to 208.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
62220	219.3 to 221.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
62233	223.2 to 244.6 feet	Key Note Segment		5 ft	107			
62221	244.9 to 249.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131149	PEERLESS ST	SAURET ST	PADRE ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62222	252.0 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
62208	261.3 to 262.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
62223	272.5 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
62234	287.8 to 307.9 feet	Key Note Segment		5 ft	100			
62209	293.4 to 294.4 feet	**Vertical Change**	.55"	5 ft	5	REF		
62224	314.7 to 315.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62235	316.3 to 337.2 feet	Key Note Segment		5 ft	105			
62225	338.9 to 340.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
62226	342.1 to 347.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
62227	348.8 to 351.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
62236	349.7 to 351.6 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: E *side of* **PEERLESS ST** *Starting at:* **SAURET ST** **$70,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261525	PENNY WAY	FAIRFIELD WAY	FAIRWAY AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110073	0.6 to 27.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**
110092	27.7 to 56.3 feet	Key Note Segment		5 ft	143			
110054	40.0 to 41.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
110074	59.1 to 68.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
110093	69.1 to 99.5 feet	Key Note Segment		5 ft	152			
110055	79.1 to 80.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
110056	87.9 to 88.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
110057	98.9 to 99.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
110075	102.7 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
110076	124.3 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
110077	146.1 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
110094	147.6 to 175.3 feet	Key Note Segment		5 ft	139			
110058	150.9 to 151.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
110059	158.2 to 159.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
110078	176.8 to 190.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
110061	184.2 to 185.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
110079	190.8 to 219.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,340**
110095	220.8 to 249.8 feet	Key Note Segment		5 ft	145			
110062	230.5 to 231.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
110064	247.4 to 248.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
110080	251.4 to 255.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
110081	259.3 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
110082	265.9 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
110065	277.5 to 278.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110083	278.3 to 282.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
110096	284.8 to 314.6 feet	Key Note Segment		5 ft	149			
110066	296.8 to 297.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
110067	306.5 to 307.5 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261525	PENNY WAY	FAIRFIELD WAY	FAIRWAY AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110068	314.2 to 315.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
110084	316.3 to 330.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
110085	333.3 to 339.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
110086	343.3 to 362.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
110069	362.0 to 363.0 feet	**Vertical Change**	-.4"	5 ft	5	REF		
110097	364.1 to 392.2 feet	Key Note Segment		5 ft	141			
110070	393.3 to 394.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
110087	394.2 to 398.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
110088	402.2 to 408.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
110089	411.3 to 417.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
110090	417.8 to 436.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,340**
110091	437.2 to 452.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
110072	438.1 to 439.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **PENNY WAY** *Starting at:* **FAIRFIELD WAY** **$137,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261530	PENNY WAY	FAIRWAY AVE	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110117	0.0 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
110137	22.4 to 51.1 feet	Key Note Segment		5 ft	144			
110098	40.1 to 41.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
110099	48.9 to 49.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
110100	53.6 to 54.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
110118	54.0 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
110119	58.8 to 84.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,420**
110120	84.5 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
110138	89.6 to 118.3 feet	Key Note Segment		5 ft	144			
110101	116.2 to 117.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
110121	120.6 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
110102	125.3 to 126.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
110139	127.9 to 156.3 feet	Key Note Segment		5 ft	142			
110103	130.8 to 131.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
110104	139.2 to 140.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
110105	154.2 to 155.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
110122	158.3 to 162.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
110123	162.9 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
110124	179.4 to 185.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
110125	186.5 to 189.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
110126	189.8 to 203.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
110140	203.2 to 231.2 feet	Key Note Segment		5 ft	140			
110106	203.3 to 204.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
110107	205.9 to 206.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
110127	234.0 to 268.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	172	SF	$120	**$20,580**
110128	268.8 to 274.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
110108	273.5 to 274.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
110141	274.6 to 303.2 feet	Key Note Segment		5 ft	143			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261530	PENNY WAY	FAIRWAY AVE	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
110110	304.1 to 305.1 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
110129	306.7 to 312.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,660
110130	315.6 to 321.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
110131	323.3 to 337.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	$8,520
110132	340.9 to 342.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
110133	345.3 to 346.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
110142	346.9 to 375.1 feet	Key Note Segment		5 ft	141			
110111	349.2 to 350.2 feet	Vertical Change	.4"	5 ft	5	REF		
110112	357.1 to 358.1 feet	Vertical Change	-.28"	5 ft	5	REF		
110134	379.2 to 415.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	183	SF	$120	$21,960
110114	403.1 to 404.1 feet	Vertical Change	.26"	5 ft	5	REF		
110143	419.4 to 448.5 feet	Key Note Segment		5 ft	146			
110115	446.4 to 447.4 feet	Vertical Change	.35"	5 ft	5	REF		
110135	450.2 to 451.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
110136	453.3 to 479.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	$15,420

TOTAL COST FOR: W *side of* **PENNY WAY** *Starting at:* **FAIRWAY AVE** **$138,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101601	PERCY ST	270 PERCY ST	SANTA FE ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132498	0.3 to 16.3 feet	Key Note Segment		5 ft	80			
132499	26.3 to 43.9 feet	Key Note Segment		5 ft	88			
132493	36.2 to 37.2 feet	Vertical Change	.43"	5 ft	5	REF		
132494	49.9 to 50.9 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
132495	52.3 to 53.3 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
132500	53.5 to 72.3 feet	Key Note Segment		5 ft	94			
132497	74.2 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
132501	75.2 to 76.2 feet	Protruding Object	36"	5 ft	5	JOB	$99	$99
132496	75.5 to 76.5 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **PERCY ST** *Starting at:* **270 PERCY ST** **$6,309.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101559	PERCY ST	CLINTON ST	301 PERCY ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132480	2.1 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
132481	9.1 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
132472	15.3 to 16.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
132486	35.8 to 55.2 feet	Key Note Segment		5 ft	97			
132482	62.9 to 69.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
132487	73.8 to 92.6 feet	Key Note Segment		5 ft	94			
132483	95.3 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
132473	123.1 to 124.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
132488	141.3 to 160.0 feet	Key Note Segment		5 ft	93			
132489	167.3 to 185.7 feet	Key Note Segment		5 ft	92			
132474	209.1 to 210.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
132490	217.8 to 237.1 feet	Key Note Segment		5 ft	97			
132475	228.7 to 229.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
132491	245.2 to 262.4 feet	Key Note Segment		5 ft	86			
132476	254.3 to 255.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
132484	264.8 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
132477	286.8 to 287.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
132478	295.3 to 296.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
132492	296.3 to 315.1 feet	Key Note Segment		5 ft	94			
132479	306.3 to 307.3 feet	**Vertical Change**	-.47"	5 ft	5	REF		
132485	317.2 to 318.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: NE *side of* **PERCY ST** *Starting at:* **CLINTON ST** **$52,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101610	PERCY ST	SANTA FE ST	CLINTON ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132548	1.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132549	9.7 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
132550	18.1 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
132551	27.3 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
132552	33.8 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
132553	38.2 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,260**
132554	50.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
132535	65.7 to 66.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
132536	69.2 to 70.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
132555	81.6 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
132556	90.4 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
132563	92.7 to 110.7 feet	Key Note Segment		5 ft	90			
132564	118.3 to 136.6 feet	Key Note Segment		5 ft	92			
132537	140.1 to 141.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
132557	145.5 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
132538	155.8 to 156.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
132558	167.3 to 171.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132539	176.1 to 177.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
132565	177.3 to 195.6 feet	Key Note Segment		5 ft	92			
132540	197.9 to 198.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
132559	202.8 to 205.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
132566	205.7 to 223.7 feet	Key Note Segment		5 ft	90			
132541	225.6 to 226.6 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
132542	232.1 to 233.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
132543	239.0 to 240.0 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
132560	243.3 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
132567	261.7 to 278.7 feet	Key Note Segment		5 ft	85			
132544	280.8 to 281.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101610	PERCY ST	SANTA FE ST	CLINTON ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132568	282.3 to 299.4 feet	Key Note Segment		5 ft	85			
132561	304.9 to 307.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132562	312.9 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
132545	313.0 to 314.0 feet	**Vertical Change**	3.35"	5 ft	5	REF		
132546	320.0 to 321.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
132547	331.5 to 332.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **PERCY ST** *Starting at:* **SANTA FE ST** **$75,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191450	PERKINS AVE	1005 PERKINS AVE	VALENCIA AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103871	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
103872	4.6 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
103869	5.4 to 6.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
103870	11.3 to 12.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
103873	14.7 to 15.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **PERKINS AVE** *Starting at:* **1005 PERKINS AVE** **$6,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191458	PERKINS AVE	1030 PERKINS AVE	LEMON AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103896	0.8 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
103897	4.4 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
103887	7.9 to 8.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
103898	10.3 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
103909	12.1 to 30.8 feet	Key Note Segment		5 ft	94			
103899	32.9 to 34.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
103900	35.3 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
103901	40.4 to 63.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
103910	63.3 to 83.2 feet	Key Note Segment		5 ft	100			
103888	65.1 to 66.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
103889	73.5 to 74.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
103902	83.5 to 84.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
103903	85.4 to 97.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
103890	94.0 to 95.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
103904	99.8 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
103891	104.6 to 105.6 feet	**Vertical Change**	.49"	5 ft	5	REF		
103905	106.3 to 131.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	125	SF	$120	**$15,000**
103892	119.5 to 120.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
103911	132.1 to 151.4 feet	Key Note Segment		5 ft	97			
103893	132.9 to 133.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103894	151.9 to 152.9 feet	**Vertical Change**	.48"	5 ft	5	REF		
103906	152.4 to 153.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
103907	154.8 to 162.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
103912	163.3 to 181.8 feet	Key Note Segment		5 ft	92			
103908	183.3 to 193.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
103895	188.7 to 189.7 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PERKINS AVE** *Starting at:* **1030 PERKINS AVE** **$59,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191353	PERKINS AVE	962 PERKINS AVE	VALENCIA AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103577	0.0 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
103578	4.6 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
103579	8.9 to 14.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
103580	14.2 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
103576	28.4 to 29.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **PERKINS AVE** *Starting at:* **962 PERKINS AVE** **$16,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191448	PERKINS AVE	LEMON AVE	VALENCIA AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103842	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103861	1.5 to 20.8 feet	Key Note Segment		5 ft	97			
103843	23.2 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
103844	45.4 to 47.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
103845	52.0 to 65.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,100**
103827	53.3 to 54.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
103862	65.7 to 85.0 feet	Key Note Segment		5 ft	97			
103828	85.2 to 86.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
103846	88.8 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
103863	92.1 to 107.6 feet	Key Note Segment		5 ft	78			
103847	112.1 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
103848	121.3 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
103849	139.5 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
103864	154.8 to 174.8 feet	Key Note Segment		5 ft	100			
103829	174.6 to 175.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
103850	176.0 to 182.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
103830	181.0 to 182.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
103851	183.4 to 185.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
103831	185.0 to 186.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
103865	185.8 to 205.2 feet	Key Note Segment		5 ft	97			
103852	207.8 to 218.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
103853	218.6 to 219.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
103854	219.8 to 221.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
103832	222.6 to 223.6 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
103833	225.1 to 226.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
103855	226.8 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
103856	230.1 to 246.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
103866	246.4 to 265.8 feet	Key Note Segment		5 ft	97			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191448	PERKINS AVE	LEMON AVE	VALENCIA AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103834	266.2 to 267.2 feet	Vertical Change	-.64"	5 ft	5	REF		
103857	267.4 to 268.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
103858	269.7 to 271.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
103835	271.6 to 272.6 feet	Vertical Change	-.29"	5 ft	5	REF		
103867	271.8 to 291.2 feet	Key Note Segment		5 ft	97			
103836	281.9 to 282.9 feet	Vertical Change	.3"	5 ft	5	REF		
103837	291.7 to 292.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
103859	294.6 to 331.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	185	SF	$120	**$22,260**
103838	300.1 to 301.1 feet	Vertical Change	2.12"	5 ft	5	REF		
103839	321.3 to 322.3 feet	Vertical Change	.38"	5 ft	5	REF		
103868	332.6 to 352.7 feet	Key Note Segment		5 ft	101			
103840	333.3 to 334.3 feet	Vertical Change	-.71"	5 ft	5	REF		
103841	343.2 to 344.2 feet	Vertical Change	.27"	5 ft	5	REF		
103860	353.7 to 354.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: N *side of* **PERKINS AVE** *Starting at:* **LEMON AVE** **$97,185.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191352	PERKINS AVE	TANGERINE AVE	950 PERKINS AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103565	0.3 to 2.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
103566	2.6 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
103573	9.3 to 29.0 feet	Key Note Segment		5 ft	98			
103567	35.1 to 38.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
103574	38.5 to 58.7 feet	Key Note Segment		5 ft	101			
103559	39.6 to 40.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
103560	43.7 to 44.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
103568	60.3 to 79.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
103569	80.5 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
103561	81.5 to 82.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
103570	85.1 to 108.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,740**
103562	86.7 to 87.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
103563	96.0 to 97.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
103575	108.0 to 127.7 feet	Key Note Segment		5 ft	99			
103564	108.9 to 109.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
103571	131.1 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
103572	136.8 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **PERKINS AVE** *Starting at:* **TANGERINE AVE** **$38,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191357	PERKINS AVE	VALENCIA AVE	TANGERINE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103590	2.9 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103591	6.4 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
103592	13.4 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
103581	14.4 to 15.4 feet	Vertical Change	-.27"	5 ft	5	REF		
103593	20.2 to 26.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
103602	26.2 to 46.2 feet	Key Note Segment		5 ft	100			
103594	48.2 to 57.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
103603	57.8 to 76.9 feet	Key Note Segment		5 ft	96			
103582	58.4 to 59.4 feet	Vertical Change	3.71"	5 ft	5	REF		
103583	67.3 to 68.3 feet	Vertical Change	.26"	5 ft	5	REF		
103595	78.6 to 91.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
103596	91.2 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
103597	101.0 to 114.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
103585	101.8 to 102.8 feet	Vertical Change	.33"	5 ft	5	REF		
103606	107.6 to 108.6 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
103586	108.9 to 109.9 feet	Vertical Change	-.26"	5 ft	5	REF		
103598	116.0 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
103604	121.7 to 141.3 feet	Key Note Segment		5 ft	98			
103599	142.4 to 146.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
103600	147.2 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
103605	151.9 to 171.8 feet	Key Note Segment		5 ft	100			
103587	162.5 to 163.5 feet	Vertical Change	.27"	5 ft	5	REF		
103588	172.0 to 173.0 feet	Vertical Change	-.27"	5 ft	5	REF		
103601	172.7 to 177.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
103589	179.4 to 180.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **PERKINS AVE** *Starting at:* **VALENCIA AVE** **$44,694.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191456	PERKINS RD	VALENCIA AVE	1030 PERKINS RD	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103874	1.7 to 2.7 feet	Vertical Change	-.31"	5 ft	5	REF		
103878	1.8 to 3.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
103879	6.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
103880	12.1 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
103875	12.9 to 13.9 feet	Vertical Change	.3"	5 ft	5	REF		
103885	24.7 to 43.8 feet	Key Note Segment		5 ft	96			
103876	44.6 to 45.6 feet	Vertical Change	.26"	5 ft	5	REF		
103881	44.7 to 50.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
103886	50.4 to 70.6 feet	Key Note Segment		5 ft	101			
103877	50.8 to 51.8 feet	Vertical Change	.36"	5 ft	5	REF		
103882	71.3 to 84.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	64	SF	$40	**$2,540**
103883	86.2 to 106.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
103884	107.4 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: S *side of* **PERKINS RD** *Starting at:* **VALENCIA AVE** **$29,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191440	PERSIMMON ST	COCONUT ST	POMEGRANATE ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74538	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
74539	3.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,566**
74557	8.8 to 30.0 feet	Key Note Segment		5 ft	95			
74540	30.0 to 32.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$504**
74558	34.3 to 55.8 feet	Key Note Segment		5 ft	97			
74541	60.8 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,536**
74542	71.8 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74533	83.2 to 84.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$338**
74559	94.1 to 116.3 feet	Key Note Segment		5 ft	100			
74534	105.4 to 106.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
74543	118.5 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74560	121.3 to 142.8 feet	Key Note Segment		5 ft	97			
74544	143.2 to 144.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$180**
74545	144.2 to 175.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,118**
74546	175.9 to 180.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,484**
74561	180.5 to 202.3 feet	Key Note Segment		5 ft	98			
74547	202.8 to 204.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
74548	204.2 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
74562	206.9 to 228.2 feet	Key Note Segment		5 ft	96			
74535	217.7 to 218.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
74549	232.8 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
74550	237.5 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,592**
74551	244.6 to 245.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
74552	248.0 to 252.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
74536	253.1 to 254.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
74553	254.3 to 262.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,212**
74563	262.1 to 284.6 feet	Key Note Segment		5 ft	101			
74554	287.2 to 288.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191440	PERSIMMON ST	COCONUT ST	POMEGRANATE ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74564	288.4 to 310.5 feet	Key Note Segment		5 ft	99			
74537	299.1 to 300.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
74555	311.2 to 322.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,994**
74556	322.7 to 324.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**

TOTAL COST FOR: E *side of* **PERSIMMON ST** *Starting at:* **COCONUT ST** **$51,093.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191443	PERSIMMON ST	POMEGRANATE ST	COCONUT ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74566	0.3 to 25.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,338**
74567	29.0 to 43.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,668**
74568	43.2 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,754**
74569	48.3 to 72.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,284**
74570	73.3 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,424**
74581	88.9 to 111.0 feet	Key Note Segment		5 ft	99			
74571	111.3 to 112.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$198**
74582	114.8 to 136.6 feet	Key Note Segment		5 ft	98			
74565	136.6 to 137.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
74572	137.8 to 139.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
74573	139.8 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,062**
74583	175.1 to 196.7 feet	Key Note Segment		5 ft	97			
74584	200.0 to 222.7 feet	Key Note Segment		5 ft	102			
74574	224.3 to 226.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
74575	230.9 to 243.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,696**
74576	247.8 to 259.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,210**
74577	259.6 to 264.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,862**
74585	266.8 to 287.7 feet	Key Note Segment		5 ft	94			
74578	287.9 to 292.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$756**
74586	292.1 to 313.4 feet	Key Note Segment		5 ft	96			
74579	315.7 to 324.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,914**
74580	324.8 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
74587	352.4 to 369.9 feet	Key Note Segment		5 ft	79			

TOTAL COST FOR: W *side of* **PERSIMMON ST** *Starting at:* **POMEGRANATE ST** **$89,028.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111058	PETITE AVE	CHIANTI AVE	RHINE CT	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90860	1.9 to 2.9 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
90867	10.3 to 26.8 feet	Key Note Segment		5 ft	83			
90861	20.1 to 21.1 feet	Vertical Change	.34"	5 ft	5	REF		
90862	26.9 to 32.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	$1,200
90863	33.3 to 34.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
90864	35.8 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
90865	45.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
90868	50.0 to 67.1 feet	Key Note Segment		5 ft	85			
90866	68.2 to 72.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,340
90869	69.4 to 72.1 feet		5.0-6.0%	5 ft	13			
90870	69.4 to 72.1 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	$1,620

TOTAL COST FOR: E *side of* **PETITE AVE** *Starting at:* **CHIANTI AVE** **$12,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111152	PETITE AVE	GAMAY AVE	MERLOT AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91565	7.8 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
91582	24.0 to 38.4 feet	Key Note Segment		5 ft	72			
91547	56.8 to 57.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
91548	63.3 to 64.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
91583	76.5 to 89.8 feet	Key Note Segment		5 ft	67			
91549	83.6 to 84.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
91566	96.8 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
91584	105.3 to 119.4 feet	Key Note Segment		5 ft	71			
91550	106.2 to 107.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
91551	114.6 to 115.6 feet	**Vertical Change**	1.7"	5 ft	5	REF		
91567	119.9 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
91552	139.4 to 140.4 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
91568	148.7 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
91569	159.6 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
91553	165.2 to 166.2 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**
91570	172.3 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
91585	178.8 to 192.8 feet	Key Note Segment		5 ft	70			
91571	197.3 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91572	202.4 to 204.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
91586	205.4 to 219.3 feet	Key Note Segment		5 ft	70			
91554	220.7 to 221.7 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
91555	230.7 to 231.7 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
91573	232.8 to 234.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
91556	236.3 to 237.3 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
91589	239.6 to 240.6 feet		5.0-6.0%	5 ft	5			
91557	240.8 to 241.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
91574	243.2 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
91558	243.6 to 244.6 feet	**Vertical Change**	1"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111152	PETITE AVE	GAMAY AVE	MERLOT AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91575	259.3 to 264.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
91587	265.8 to 278.7 feet	Key Note Segment		5 ft	65			
91559	266.7 to 267.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
91560	276.5 to 277.5 feet	**Vertical Change**	1.09"	5 ft	5	REF		
91561	280.5 to 281.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
91562	290.4 to 291.4 feet	**Vertical Change**	-.6"	5 ft	5	SF	$75	**$375**
91576	295.6 to 297.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91563	296.8 to 297.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
91588	307.7 to 322.3 feet	Key Note Segment		5 ft	73			
91577	322.3 to 324.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
91578	324.5 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91579	333.0 to 337.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
91564	335.9 to 336.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
91580	338.8 to 343.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
91581	343.8 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
91590	345.7 to 348.6 feet		6.0-7.0%	5 ft	15			

TOTAL COST FOR: W *side of* **PETITE AVE** *Starting at:* **GAMAY AVE** **$47,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111033	PETITE AVE	MERLOT AVE	PETITE CT	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90472	0.6 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
90473	24.2 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
90474	27.2 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
90465	30.8 to 31.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
90481	35.1 to 36.3 feet		5.0-6.0%	5 ft	6			
90466	37.5 to 38.5 feet	**Vertical Change**	-1.6"	5 ft	5	SF	$75	**$375**
90479	37.7 to 49.9 feet	Key Note Segment		5 ft	61			
90475	53.6 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90476	62.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
90480	71.2 to 84.4 feet	Key Note Segment		5 ft	66			
90468	88.0 to 89.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
90477	89.6 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
90469	91.4 to 92.4 feet	**Vertical Change**	.57"	5 ft	5	REF		
90470	95.0 to 96.0 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
90478	99.0 to 100.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
90471	103.3 to 104.3 feet	**Vertical Change**	-1.16"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **PETITE AVE** *Starting at:* **MERLOT AVE** **$26,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111105	PETITE AVE	MERLOT AVE	CHIANTI AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90938	10.8 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
90945	27.7 to 42.3 feet	Key Note Segment		5 ft	73			
90928	42.4 to 43.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
90939	44.2 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
90940	50.2 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90929	56.8 to 57.8 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
90941	63.6 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90946	68.8 to 86.9 feet	Key Note Segment		5 ft	91			
90930	69.8 to 70.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
90931	88.2 to 89.2 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
90932	97.1 to 98.1 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
90933	112.4 to 113.4 feet	**Vertical Change**	-1.05"	5 ft	5	SF	$75	**$375**
90942	114.4 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
90934	120.5 to 121.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
90943	123.8 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
90947	126.9 to 143.1 feet	Key Note Segment		5 ft	81			
90935	127.6 to 128.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
90944	162.3 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
90936	164.6 to 165.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
90948	168.6 to 171.0 feet		5.0-6.0%	5 ft	12			
90949	168.6 to 171.0 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
90937	170.6 to 171.6 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **PETITE AVE** *Starting at:* **MERLOT AVE** **$17,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111040	PETITE AVE	PETITE CT	GAMAY AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90541	1.1 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
90537	4.4 to 5.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
90542	7.6 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
90543	14.2 to 25.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
90544	27.8 to 39.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,020**
90545	40.8 to 45.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
90546	47.5 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
90547	60.8 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
90548	65.8 to 73.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
90549	75.0 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
90538	91.7 to 92.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
90539	127.2 to 128.2 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
90550	131.8 to 135.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
90551	139.2 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
90540	145.1 to 146.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
90552	167.1 to 168.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: E *side of* **PETITE AVE** *Starting at:* **PETITE CT** **$50,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111103	PETITE AVE	RHINE CT	MERLOT AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90918	0.0 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
90906	5.8 to 6.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
90907	13.9 to 14.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
90919	20.3 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
90926	23.5 to 39.1 feet	Key Note Segment		5 ft	78			
90908	27.7 to 28.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
90909	32.9 to 33.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
90920	39.1 to 44.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,080**
90910	39.3 to 40.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
90921	44.7 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
90911	45.9 to 46.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
90927	51.6 to 64.5 feet	Key Note Segment		5 ft	65			
90912	52.9 to 53.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
90922	64.5 to 65.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
90913	69.6 to 70.6 feet	**Vertical Change**	2.52"	5 ft	5	SF	$75	**$375**
90914	72.4 to 73.4 feet	**Vertical Change**	2.93"	5 ft	5	REF		
90923	73.3 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
90915	74.9 to 75.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
90924	79.6 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
90916	83.4 to 84.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
90925	85.1 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
90917	89.6 to 90.6 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **PETITE AVE** *Starting at:* **RHINE CT** **$21,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111036	PETITE CT	PETITE AVE	PETITE AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90508	0.9 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
90482	4.6 to 5.6 feet	**Vertical Change**	.91"	5 ft	5	SF	$75	**$375**
90509	7.0 to 14.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
90483	13.3 to 14.3 feet	**Vertical Change**	.64"	5 ft	5	REF		
90510	15.3 to 20.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,880**
90484	20.2 to 21.2 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
90511	32.0 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
90485	37.4 to 38.4 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
90512	39.6 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
90535	45.1 to 46.3 feet		5.0-6.0%	5 ft	6			
90486	46.0 to 47.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
90513	57.4 to 62.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
90527	63.4 to 71.3 feet	Key Note Segment		5 ft	40			
90487	63.6 to 64.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
90514	72.3 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
90515	77.3 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90516	86.1 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
90517	88.1 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90488	95.9 to 96.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
90518	99.3 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
90519	101.0 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
90489	102.8 to 103.8 feet	**Vertical Change**	1.93"	5 ft	5	REF		
90528	110.7 to 126.3 feet	Key Note Segment		5 ft	78			
90490	111.8 to 112.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
90491	130.6 to 131.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
90492	133.5 to 134.5 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
90493	135.4 to 136.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
90494	138.2 to 139.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111036	PETITE CT	PETITE AVE	PETITE AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90529	146.4 to 162.2 feet	Key Note Segment		5 ft	79			
90495	149.7 to 150.7 feet	Vertical Change	1.07"	5 ft	5	REF		
90496	162.3 to 163.3 feet	Vertical Change	.51"	5 ft	5	REF		
90530	170.9 to 184.3 feet	Key Note Segment		5 ft	67			
90497	182.9 to 186.5 feet	Vertical Change	.29"	5 ft	18	REF		
90520	187.3 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
90498	199.6 to 200.6 feet	Vertical Change	.3"	5 ft	5	REF		
90499	207.8 to 208.8 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
90531	212.7 to 225.6 feet	Key Note Segment		5 ft	65			
90500	241.7 to 242.7 feet	Vertical Change	.39"	5 ft	5	LF	$75	**$375**
90521	246.8 to 247.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90532	251.3 to 265.3 feet	Key Note Segment		5 ft	70			
90501	255.8 to 256.8 feet	Vertical Change	.93"	5 ft	5	REF		
90502	258.7 to 259.7 feet	Vertical Change	.46"	5 ft	5	REF		
90522	265.3 to 267.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	**$380**
90523	272.3 to 283.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
90524	283.9 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
90503	290.3 to 291.3 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
90536	292.1 to 293.1 feet		6.0-7.0%	5 ft	5			
90504	302.0 to 303.0 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
90533	305.2 to 318.8 feet	Key Note Segment		5 ft	68			
90505	319.5 to 320.5 feet	Vertical Change	.48"	5 ft	5	LF	$75	**$375**
90534	330.5 to 344.2 feet	Key Note Segment		5 ft	69			
90506	332.4 to 333.4 feet	Vertical Change	.69"	5 ft	5	REF		
90525	344.3 to 347.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	**$700**
90526	365.0 to 367.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
90507	368.5 to 369.5 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S/E/N *side of* **PETITE CT** *Starting at:* **PETITE AVE** **$56,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091328	PHILIP ST	E CLEVELAND AVE	W SHERWOOD WAY	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54288	0.0 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,216**
54289	7.2 to 13.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	23	SF	$120	**$2,784**
54290	13.0 to 19.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,312**
54291	22.3 to 28.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,784**
54292	28.5 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
54336	33.6 to 47.3 feet	Key Note Segment		4 ft	55			
54293	47.4 to 51.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	15	SF	$40	**$608**
54294	51.5 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
54337	57.8 to 72.5 feet	Key Note Segment		4 ft	59			
54265	58.9 to 59.9 feet	**Vertical Change**	.35"	4 ft	4	REF		
54266	72.8 to 73.8 feet	**Vertical Change**	.35"	4 ft	4	REF		
54295	73.0 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
54296	83.4 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
54297	92.8 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
54267	119.9 to 120.9 feet	**Vertical Change**	-.51"	4 ft	4	SF	$75	**$300**
54298	127.8 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
54268	129.6 to 130.6 feet	**Vertical Change**	-.38"	4 ft	4	REF		
54338	138.6 to 152.7 feet	Key Note Segment		4 ft	56			
54299	153.4 to 155.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	8	SF	$40	**$336**
54300	156.2 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,912**
54339	170.8 to 186.4 feet	Key Note Segment		4 ft	62			
54269	184.9 to 185.9 feet	**Vertical Change**	.3"	4 ft	4	REF		
54301	201.2 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
54270	204.8 to 205.8 feet	**Vertical Change**	.92"	4 ft	4	SF	$75	**$300**
54302	207.0 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,480**
54271	214.6 to 215.6 feet	**Vertical Change**	.84"	4 ft	4	REF		
54272	219.9 to 220.9 feet	**Vertical Change**	.44"	4 ft	4	REF		
54340	237.8 to 252.5 feet	Key Note Segment		4 ft	59			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091328	PHILIP ST	E CLEVELAND AVE	W SHERWOOD WAY	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54273	238.5 to 239.5 feet	Vertical Change	-1.02"	4 ft	4	REF		
54303	252.5 to 268.3 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	63	SF	$40	$2,528
54341	268.3 to 282.8 feet	Key Note Segment		4 ft	58			
54274	278.8 to 279.8 feet	Vertical Change	.46"	4 ft	4	REF		
54304	286.6 to 295.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	$4,416
54275	290.2 to 291.2 feet	Vertical Change	1.13"	4 ft	4	REF		
54305	299.4 to 302.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
54306	305.3 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	$7,920
54276	305.6 to 306.6 feet	Vertical Change	-.54"	4 ft	4	REF		
54307	321.8 to 338.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	68	SF	$120	$8,160
54342	338.8 to 353.8 feet	Key Note Segment		4 ft	60			
54277	344.2 to 345.2 feet	Vertical Change	.33"	4 ft	4	REF		
54278	347.4 to 348.4 feet	Vertical Change	.35"	4 ft	4	REF		
54279	355.6 to 356.6 feet	Vertical Change	2.31"	4 ft	4	SF	$75	$300
54351	358.6 to 360.8 feet		11.0-12.0%	4 ft	9			
54352	358.6 to 360.8 feet	Running Slope	11.0-12.0%	4 ft	9	SF	$120	$1,056
54308	359.3 to 360.6 feet	Cross Slope (PAR)	>15.0%	4 ft	5	SF	$120	$624
54280	361.1 to 362.1 feet	Vertical Change	.36"	4 ft	4	LF	$75	$300
54309	365.6 to 370.3 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	19	SF	$120	$2,256
54310	372.4 to 374.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	8	SF	$120	$960
54343	374.4 to 385.6 feet	Key Note Segment		4 ft	45			
54282	377.6 to 378.6 feet	Vertical Change	.44"	4 ft	4	REF		
54283	386.5 to 387.5 feet	Vertical Change	.44"	4 ft	4	REF		
54311	386.8 to 387.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	$528
54312	389.4 to 395.0 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	22	SF	$120	$2,688
54313	396.2 to 412.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	66	SF	$120	$7,872
54314	414.7 to 420.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	23	SF	$120	$2,784
54284	420.5 to 421.5 feet	Vertical Change	-.48"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091328	PHILIP ST	E CLEVELAND AVE	W SHERWOOD WAY	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54315	422.8 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
54316	426.3 to 443.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	70	SF	$120	**$8,448**
54344	446.9 to 461.0 feet	Key Note Segment		4 ft	56			
54317	461.1 to 465.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	17	SF	$40	**$672**
54318	467.7 to 469.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
54319	470.8 to 477.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
54345	477.3 to 490.5 feet	Key Note Segment		4 ft	53			
54320	490.7 to 494.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,584**
54321	496.8 to 525.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	114	SF	$120	**$13,680**
54322	529.2 to 543.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	58	SF	$120	**$6,912**
54323	548.4 to 553.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
54346	555.4 to 569.4 feet	Key Note Segment		4 ft	56			
54324	570.4 to 572.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,200**
54325	573.1 to 577.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
54347	581.3 to 595.6 feet	Key Note Segment		4 ft	57			
54326	595.6 to 607.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	49	SF	$40	**$1,968**
54327	608.3 to 614.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,832**
54285	608.5 to 612.2 feet	**Vertical Change**	.6"	4 ft	15	REF		
54328	617.9 to 629.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,472**
54329	630.3 to 654.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	95	SF	$120	**$11,376**
54286	650.7 to 651.7 feet	**Vertical Change**	.38"	4 ft	4	REF		
54348	654.0 to 668.3 feet	Key Note Segment		4 ft	57			
54330	668.7 to 684.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,392**
54349	684.6 to 699.1 feet	Key Note Segment		4 ft	58			
54331	699.1 to 705.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	24	SF	$40	**$976**
54332	705.8 to 708.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
54333	710.7 to 729.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	73	SF	$120	**$8,784**
54334	729.0 to 736.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,696**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091328	PHILIP ST	E CLEVELAND AVE	W SHERWOOD WAY	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54350	736.7 to 751.1 feet	Key Note Segment		4 ft	58			
54335	751.1 to 783.9 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	131	SF	$40	$5,248
54287	784.7 to 785.7 feet	Vertical Change	-.4"	4 ft	4	LF	$75	$300

TOTAL COST FOR: E *side of* **PHILIP ST** *Starting at:* **E CLEVELAND AVE** **$176,172.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091320	PHILIP ST	W SHERWOOD WAY	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54206	0.0 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	41	SF	$120	**$4,944**
54207	10.7 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
54190	16.3 to 17.3 feet	**Vertical Change**	-.27"	4 ft	4	REF		
54208	16.6 to 29.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	50	SF	$120	**$6,000**
54248	30.0 to 48.3 feet	Key Note Segment		4 ft	73			
54191	31.2 to 32.2 feet	**Vertical Change**	-.33"	4 ft	4	REF		
54209	48.8 to 57.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	36	SF	$120	**$4,320**
54249	57.8 to 72.7 feet	Key Note Segment		4 ft	60			
54210	72.8 to 86.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	54	SF	$40	**$2,160**
54211	89.6 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	130	SF	$120	**$15,648**
54212	122.2 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
54192	124.4 to 125.4 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
54213	127.9 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,872**
54214	131.8 to 136.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
54250	136.8 to 150.0 feet	Key Note Segment		4 ft	53			
54215	152.1 to 164.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	49	SF	$120	**$5,856**
54251	166.2 to 179.8 feet	Key Note Segment		4 ft	54			
54193	170.2 to 171.2 feet	**Vertical Change**	.27"	4 ft	4	REF		
54194	190.4 to 191.4 feet	**Vertical Change**	.33"	4 ft	4	LF	$75	**$300**
54195	197.1 to 198.1 feet	**Vertical Change**	-.79"	4 ft	4	SF	$75	**$300**
54216	199.0 to 233.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	138	SF	$120	**$16,560**
54196	216.2 to 217.2 feet	**Vertical Change**	.38"	4 ft	4	REF		
54217	237.9 to 239.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
54252	240.8 to 254.9 feet	Key Note Segment		4 ft	56			
54218	255.7 to 262.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$3,024**
54219	264.8 to 266.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$624**
54253	266.1 to 280.6 feet	Key Note Segment		4 ft	58			
54220	280.6 to 281.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	5	SF	$40	**$192**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091320	PHILIP ST	W SHERWOOD WAY	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54221	281.8 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
54222	300.3 to 329.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	118	SF	$120	**$14,208**
54254	340.7 to 354.7 feet	Key Note Segment		4 ft	56			
54223	354.8 to 361.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	28	SF	$40	**$1,104**
54224	361.7 to 366.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	21	SF	$120	**$2,496**
54225	367.8 to 371.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	14	SF	$120	**$1,728**
54226	371.4 to 372.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$624**
54227	373.5 to 374.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
54255	375.1 to 390.3 feet	Key Note Segment		4 ft	61			
54228	394.5 to 400.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
54229	402.2 to 413.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,568**
54263	413.5 to 414.8 feet		11.0-12.0%	4 ft	5			
54230	418.8 to 434.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
54197	422.6 to 423.6 feet	**Vertical Change**	.48"	4 ft	4	REF		
54231	438.0 to 447.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,416**
54256	447.2 to 462.0 feet	Key Note Segment		4 ft	59			
54198	461.8 to 462.8 feet	**Vertical Change**	.38"	4 ft	4	REF		
54232	462.2 to 478.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	65	SF	$40	**$2,608**
54257	478.5 to 492.5 feet	Key Note Segment		4 ft	56			
54233	492.5 to 497.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	21	SF	$40	**$832**
54234	498.1 to 506.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
54235	506.6 to 549.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	170	SF	$120	**$20,448**
54258	549.2 to 563.3 feet	Key Note Segment		4 ft	56			
54236	564.3 to 578.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	56	SF	$120	**$6,720**
54259	578.3 to 592.3 feet	Key Note Segment		4 ft	56			
54199	593.4 to 594.4 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
54200	613.5 to 614.5 feet	**Vertical Change**	1.76"	4 ft	4	SF	$75	**$300**
54237	616.3 to 617.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091320	PHILIP ST	W SHERWOOD WAY	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54238	621.9 to 624.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
54264	624.3 to 625.7 feet		5.0-6.0%	4 ft	6			
54201	625.1 to 626.1 feet	**Vertical Change**	-1.79"	4 ft	4	SF	$75	**$300**
54239	628.5 to 646.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	71	SF	$120	**$8,544**
54240	648.3 to 650.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
54260	653.1 to 667.0 feet	Key Note Segment		4 ft	56			
54241	667.0 to 672.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	20	SF	$40	**$816**
54242	672.1 to 683.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	**$5,424**
54261	683.4 to 697.8 feet	Key Note Segment		4 ft	58			
54243	697.8 to 733.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	142	SF	$40	**$5,664**
54202	715.6 to 716.6 feet	**Vertical Change**	-.3"	4 ft	4	REF		
54244	733.4 to 736.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
54262	737.3 to 751.3 feet	Key Note Segment		4 ft	56			
54203	737.6 to 738.6 feet	**Vertical Change**	-.28"	4 ft	4	REF		
54245	751.8 to 758.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,072**
54246	758.2 to 769.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,328**
54204	761.0 to 762.0 feet	**Vertical Change**	3.3"	4 ft	4	REF		
54205	769.7 to 770.7 feet	**Vertical Change**	.43"	4 ft	4	LF	$75	**$300**
54247	772.7 to 785.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**

TOTAL COST FOR: W *side of* **PHILIP ST** *Starting at:* **W SHERWOOD WAY** **$185,396.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081433	PIERCE LN	COOLIDGE ST	MONROE AVE	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127285	13.3 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
127286	18.2 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**
127281	39.4 to 40.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
127287	47.7 to 69.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,140**
127282	67.0 to 68.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
127288	70.0 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
127283	74.3 to 75.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
127289	83.4 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
127290	89.8 to 91.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
127291	94.5 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
127292	103.1 to 106.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
127293	108.3 to 115.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
127294	120.5 to 131.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
127295	132.7 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
127284	133.7 to 134.7 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PIERCE LN** *Starting at:* **COOLIDGE ST** **$64,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081317	PIERCE LN	MADISON DR	TRUMAN DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126853	1.1 to 2.1 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
126877	3.5 to 4.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	$780
126878	6.8 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
126854	7.4 to 8.4 feet	Vertical Change	.26"	5 ft	5	REF		
126855	15.6 to 16.6 feet	Vertical Change	.26"	5 ft	5	REF		
126879	15.6 to 22.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,320
126915	24.2 to 42.6 feet	Key Note Segment		5 ft	92			
126880	43.5 to 58.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	$8,700
126856	45.2 to 46.2 feet	Vertical Change	2.91"	5 ft	5	REF		
126881	60.3 to 64.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,460
126882	67.3 to 68.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$780
126883	68.6 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
126916	74.7 to 93.4 feet	Key Note Segment		5 ft	94			
126857	74.9 to 75.9 feet	Vertical Change	.33"	5 ft	5	REF		
126884	93.4 to 96.6 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	16	SF	$40	$640
126858	93.5 to 94.5 feet	Vertical Change	-.31"	5 ft	5	REF		
126885	98.1 to 101.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
126859	100.7 to 101.7 feet	Vertical Change	.39"	5 ft	5	REF		
126917	101.2 to 120.0 feet	Key Note Segment		5 ft	94			
126860	107.1 to 108.1 feet	Vertical Change	.28"	5 ft	5	REF		
126886	121.3 to 153.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	161	SF	$120	$19,260
126861	152.2 to 153.2 feet	Vertical Change	.26"	5 ft	5	REF		
126887	153.8 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
126888	160.8 to 178.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	$10,500
126918	178.3 to 196.6 feet	Key Note Segment		5 ft	92			
126863	182.9 to 183.9 feet	Vertical Change	.49"	5 ft	5	REF		
126864	196.7 to 197.7 feet	Vertical Change	-.28"	5 ft	5	REF		
126889	199.3 to 203.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081317	PIERCE LN	MADISON DR	TRUMAN DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126919	203.6 to 222.4 feet	Key Note Segment		5 ft	94			
126865	210.9 to 211.9 feet	Vertical Change	.41"	5 ft	5	REF		
126866	216.6 to 217.6 feet	Vertical Change	.33"	5 ft	5	REF		
126890	224.6 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
126891	231.3 to 249.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
126892	249.3 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
126893	277.2 to 281.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
126920	281.5 to 300.2 feet	Key Note Segment		5 ft	94			
126894	302.0 to 306.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
126895	306.2 to 307.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
126921	307.4 to 325.9 feet	Key Note Segment		5 ft	93			
126896	326.8 to 384.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	287	SF	$120	**$34,440**
126867	328.1 to 329.1 feet	Vertical Change	.45"	5 ft	5	REF		
126868	359.2 to 360.2 feet	Vertical Change	.35"	5 ft	5	REF		
126922	384.7 to 403.8 feet	Key Note Segment		5 ft	96			
126869	385.1 to 386.1 feet	Vertical Change	.28"	5 ft	5	REF		
126897	405.8 to 408.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
126923	410.8 to 429.4 feet	Key Note Segment		5 ft	93			
126870	429.7 to 430.7 feet	Vertical Change	2.2"	5 ft	5	SF	$75	**$375**
126898	431.5 to 432.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
126899	432.6 to 441.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
126900	444.2 to 453.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
126901	455.8 to 462.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
126902	463.7 to 468.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
126903	470.3 to 481.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
126871	474.0 to 475.0 feet	Vertical Change	.28"	5 ft	5	REF		
126904	484.9 to 487.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
126872	486.0 to 487.0 feet	Vertical Change	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081317	PIERCE LN	MADISON DR	TRUMAN DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126924	488.5 to 506.8 feet	Key Note Segment		5 ft	92			
126873	507.2 to 508.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126905	509.1 to 513.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
126925	514.0 to 532.3 feet	Key Note Segment		5 ft	91			
126906	534.6 to 564.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,820**
126874	556.0 to 557.0 feet	**Vertical Change**	-.46"	5 ft	5	REF		
126907	566.6 to 569.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
126875	567.1 to 568.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		
126926	569.2 to 583.8 feet	Key Note Segment		5 ft	73			
126876	588.0 to 589.0 feet	**Vertical Change**	1.77"	5 ft	5	REF		
126908	589.0 to 590.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
126909	596.3 to 597.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
126910	597.5 to 598.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
126911	601.0 to 603.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
126912	604.9 to 616.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
126927	618.8 to 635.8 feet	Key Note Segment		5 ft	85			
126913	635.8 to 639.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
126914	640.3 to 643.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **PIERCE LN** *Starting at:* **MADISON DR** **$193,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081435	PIERCE LN	MONROE AVE	MADISON DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127300	0.8 to 5.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
127301	5.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
127302	13.0 to 20.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
127303	23.0 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
127304	26.3 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
127305	44.6 to 65.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,240**
127296	56.3 to 57.3 feet	**Vertical Change**	-.44"	5 ft	5	REF		
127306	65.8 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
127307	72.5 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,880**
127297	100.1 to 101.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
127298	108.8 to 109.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
127308	112.1 to 150.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	190	SF	$120	**$22,860**
127299	143.7 to 144.7 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PIERCE LN** *Starting at:* **MONROE AVE** **$76,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081431	PIERCE LN	TRUMAN DR	COOLIDGE ST	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127267	0.4 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
127268	5.3 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
127269	9.0 to 13.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
127270	14.9 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
127271	28.3 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,900**
127265	33.9 to 34.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
127272	42.5 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
127273	46.0 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
127274	63.4 to 85.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,260**
127275	85.5 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
127276	91.3 to 98.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
127277	98.8 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
127278	107.4 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
127279	128.8 to 140.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
127280	141.3 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
127266	145.0 to 146.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PIERCE LN** *Starting at:* **TRUMAN DR** **$80,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211646	PINE ST	1300 YOSEMITE AVE	OLIVE AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106786	0.8 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	32	SF	$120	**$3,780**
106787	4.3 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	108	SF	$120	**$12,960**
106788	18.8 to 23.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	41	SF	$120	**$4,860**
106784	20.7 to 21.7 feet	**Vertical Change**	-.42"	9 ft	9	REF		
106789	31.2 to 33.8 feet	Cross Slope (PAR)	5.0-6.0%	9 ft	23	SF	$120	**$2,808**
106790	33.8 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	32	SF	$120	**$3,780**
106791	40.3 to 50.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	95	SF	$120	**$11,340**
106792	53.2 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	248	SF	$120	**$29,808**
106793	83.5 to 94.4 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	98	SF	$120	**$11,772**
106794	99.4 to 105.1 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	51	SF	$120	**$6,156**
106795	105.5 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	129	SF	$120	**$15,444**
106796	122.2 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	82	SF	$120	**$9,828**
106797	133.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	23	SF	$120	**$2,700**
106798	140.3 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	19	SF	$120	**$2,268**
106799	146.6 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	42	SF	$120	**$5,076**
106800	157.8 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	32	SF	$120	**$3,780**
106801	165.1 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	47	SF	$120	**$5,616**
106802	176.4 to 186.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	95	SF	$120	**$11,340**
106785	182.0 to 183.0 feet	**Vertical Change**	.33"	9 ft	9	REF		
106803	186.9 to 195.8 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	80	SF	$120	**$9,612**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **1300 YOSEMITE AVE** **$152,928.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211611	PINE ST	325 PINE ST	MAPLE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106619	1.5 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
106620	31.2 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
106621	51.4 to 54.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
106622	57.9 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
106623	65.8 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
106624	88.8 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
106625	100.8 to 110.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
106626	111.5 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106641	118.9 to 150.8 feet	Key Note Segment		5 ft	160			
106614	154.3 to 155.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
106627	157.3 to 162.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
106615	160.7 to 161.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
106628	165.5 to 168.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
106629	170.8 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	203	SF	$120	**$24,300**
106616	185.6 to 186.6 feet	**Vertical Change**	1.59"	5 ft	5	REF		
106630	214.2 to 236.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
106631	236.4 to 237.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
106632	237.7 to 239.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
106633	240.6 to 252.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
106634	252.6 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
106635	263.0 to 283.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**
106617	279.3 to 280.3 feet	**Vertical Change**	2.82"	5 ft	5	REF		
106636	287.6 to 297.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,180**
106637	300.7 to 302.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
106638	306.0 to 308.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
106639	310.6 to 313.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
106640	314.4 to 316.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
106618	314.5 to 315.5 feet	**Vertical Change**	.86"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211611	PINE ST	325 PINE ST	MAPLE ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E	*side of* **PINE ST**	*Starting at:* **325 PINE ST**						**$135,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211607	PINE ST	467 PINE ST	455 PINE ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106613	5.3 to 39.2 feet	Key Note Segment		5 ft	170			
106603	39.2 to 46.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	35	SF	$40	$1,420
106604	50.7 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
106602	57.2 to 58.2 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
106605	66.9 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,540
106606	82.7 to 84.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
106607	93.3 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
106608	98.3 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
106609	112.5 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
106610	120.5 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$2,040
106611	124.5 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,780
106612	148.1 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **467 PINE ST** **$31,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2105191001	PINE ST	FOURTH ST	JENNINGS ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38628	5.5 to 6.5 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
38631	6.8 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
38632	15.5 to 17.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
38633	21.5 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
38634	28.1 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
38639	46.8 to 67.2 feet	Key Note Segment		5 ft	102			
38635	67.3 to 68.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$240
38636	68.9 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
38637	105.8 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
38638	110.8 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
38640	118.6 to 148.3 feet	Key Note Segment		5 ft	149			
38629	118.7 to 119.7 feet	Vertical Change	-.29"	5 ft	5	REF		
38630	133.8 to 134.8 feet	Vertical Change	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **FOURTH ST** **$13,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211605	PINE ST	GILL AVE	467 PINE ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106556	2.9 to 3.9 feet	Vertical Change	-.35"	5 ft	5	LF	$75	$375
106557	9.6 to 10.6 feet	Vertical Change	.27"	5 ft	5	REF		
106561	9.6 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
106562	21.5 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
106563	23.2 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
106564	29.9 to 50.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	$12,120
106565	58.3 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
106566	69.1 to 87.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,100
106567	106.7 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
106568	110.2 to 115.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,420
106569	115.9 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
106570	126.9 to 127.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
106571	131.2 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
106572	144.8 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
106573	157.8 to 170.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,860
106600	178.7 to 204.9 feet	Key Note Segment		5 ft	131			
106574	204.9 to 208.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$700
106575	215.0 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
106576	232.6 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
106558	238.5 to 239.5 feet	Vertical Change	2.36"	5 ft	5	SF	$75	$375
106577	245.2 to 255.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
106578	260.1 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
106559	272.8 to 273.8 feet	Vertical Change	.27"	5 ft	5	REF		
106579	282.4 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
106580	295.0 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
106560	298.0 to 299.0 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
106581	303.4 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
106582	307.3 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211605	PINE ST	GILL AVE	467 PINE ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106583	313.3 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
106584	333.2 to 338.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
106585	374.3 to 376.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
106586	380.8 to 386.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
106587	392.3 to 397.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
106588	402.3 to 407.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
106589	407.6 to 408.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
106601	412.1 to 432.2 feet	Key Note Segment		5 ft	101			
106590	433.3 to 434.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106591	444.3 to 448.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
106592	452.9 to 461.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
106593	465.8 to 467.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
106594	474.0 to 478.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
106595	483.9 to 492.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
106596	495.3 to 499.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
106597	502.8 to 509.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
106598	518.3 to 552.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
106599	561.1 to 565.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **GILL AVE** **$168,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241228	PINE ST	HOWARD RD	R ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107147	1.0 to 2.0 feet	Cross Slope (PAR)	7.0-8.0%	10 ft	10	SF	$120	**$1,200**
107148	6.3 to 29.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	235	SF	$120	**$28,200**
107154	22.4 to 23.4 feet	**Continuous Width**	32"	10 ft	10	SF	$120	**$1,200**
107149	31.0 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	236	SF	$120	**$28,320**
107146	38.8 to 39.8 feet	**Vertical Change**	1.96"	10 ft	10	REF		
107150	58.9 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	78	SF	$120	**$9,360**
107151	66.7 to 82.5 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	158	SF	$120	**$18,960**
107152	84.8 to 85.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	10	SF	$120	**$1,200**
107153	88.6 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	397	SF	$120	**$47,640**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **HOWARD RD** **$136,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241329	PINE ST	HOWARD RD	OAK ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107338	81.2 to 82.2 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
107339	119.9 to 120.9 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
107340	145.7 to 146.7 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
107341	196.1 to 197.1 feet	Vertical Change	.41"	5 ft	5	LF	$75	**$375**
107342	209.4 to 210.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
107344	300.1 to 304.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
107345	309.8 to 311.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
107346	313.0 to 314.0 feet		5.0-6.0%	5 ft	5			
107347	314.0 to 315.3 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: W *side of* **PINE ST** *Starting at:* **HOWARD RD** **$5,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151146	PINE ST	INDEPENDENCE DRIVE	801 PINE ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82179	2.2 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,860**
82180	22.5 to 45.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
82181	62.3 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
82182	77.2 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
82183	91.0 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
82184	128.4 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
82185	145.2 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82186	169.3 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
82187	204.2 to 205.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82188	210.0 to 228.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
82189	228.9 to 232.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
82190	232.8 to 234.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
82191	238.6 to 240.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82192	244.8 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
82193	259.8 to 263.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
82194	264.4 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
82195	280.5 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
82176	286.9 to 287.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
82196	295.3 to 296.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
82197	299.2 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
82198	306.3 to 311.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
82199	311.5 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
82200	319.8 to 324.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
82201	324.3 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82177	331.7 to 332.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
82202	332.8 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82203	334.9 to 346.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
82204	351.9 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151146	PINE ST	INDEPENDENCE DRIVE	801 PINE ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82205	361.0 to 373.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
82178	370.5 to 371.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
82206	375.8 to 386.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
82207	389.5 to 394.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
82210	394.8 to 395.8 feet		5.0-6.0%	5 ft	5			
82208	396.6 to 399.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
82209	399.4 to 403.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
82211	401.3 to 404.1 feet		5.0-6.0%	5 ft	14			
82212	401.3 to 404.1 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **INDEPENDENCE DRIVE** **$138,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151138	PINE ST	INDEPENDENCE DRIVE	PECAN AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82076	10.6 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
82070	12.3 to 13.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
82077	20.4 to 22.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
82078	24.0 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
82079	35.3 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
82080	42.6 to 59.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
82081	66.1 to 70.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
82082	74.3 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82083	77.4 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
82071	81.0 to 82.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
82084	82.3 to 83.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
82085	85.2 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
82086	99.9 to 103.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
82087	103.9 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
82088	122.3 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82089	133.7 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82090	144.4 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82091	157.4 to 158.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82092	161.7 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82093	177.8 to 179.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82094	204.7 to 205.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82072	205.2 to 206.2 feet	**Vertical Change**	1.22"	5 ft	5	REF		
82095	211.0 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
82096	276.8 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
82097	292.7 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
82098	304.8 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
82099	311.8 to 323.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
82100	327.3 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151138	PINE ST	INDEPENDENCE DRIVE	PECAN AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82101	341.6 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
82102	348.5 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
82103	378.3 to 382.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
82104	401.5 to 413.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
82105	418.2 to 425.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
82106	430.3 to 433.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82107	445.3 to 452.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
82108	457.8 to 458.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82109	463.3 to 465.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
82110	475.7 to 479.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
82111	486.6 to 488.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
82112	493.8 to 502.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
82113	508.8 to 516.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
82074	522.1 to 523.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
82114	528.1 to 532.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
82115	535.3 to 545.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
82116	554.3 to 559.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
82075	571.7 to 572.7 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
82117	578.0 to 580.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: W *side of* **PINE ST** *Starting at:* **INDEPENDENCE DRIVE** **$123,825.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211642	PINE ST	MAPLE ST	OAK ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106747	0.3 to 5.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
106748	6.3 to 7.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
106749	8.3 to 9.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
106750	9.7 to 23.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	69	SF	$120	**$8,220**
106774	24.4 to 50.9 feet	Key Note Segment		5 ft	133			
106751	54.0 to 57.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
106752	59.5 to 105.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	231	SF	$120	**$27,720**
106742	62.3 to 63.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
106743	93.4 to 94.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
106753	106.1 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
106754	121.8 to 125.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
106755	129.0 to 133.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
106756	136.3 to 137.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
106757	140.5 to 146.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
106758	149.8 to 209.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	300	SF	$120	**$36,000**
106744	194.8 to 195.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
106759	210.5 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
106760	215.9 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
106761	217.3 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
106762	226.8 to 228.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
106763	230.6 to 241.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
106764	242.3 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
106765	250.6 to 260.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
106775	265.8 to 288.3 feet	Key Note Segment		5 ft	113			
106745	288.0 to 289.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
106766	291.5 to 299.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
106767	299.3 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
106768	311.8 to 316.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211642	PINE ST	MAPLE ST	OAK ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106769	317.3 to 328.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
106770	333.3 to 337.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
106771	340.2 to 341.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
106772	344.4 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106746	348.0 to 349.0 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
106773	355.1 to 356.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
106776	355.2 to 356.2 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **MAPLE ST** **$149,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211644	PINE ST	OAK ST	127 PINE ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106778	0.5 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	76	SF	$120	**$9,072**
106779	18.4 to 19.7 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	12	SF	$120	**$1,404**
106780	23.1 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	12	SF	$120	**$1,404**
106781	25.3 to 51.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	234	SF	$120	**$28,080**
106777	29.7 to 30.7 feet	**Vertical Change**	2.07"	9 ft	9	REF		
106782	51.3 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	12	SF	$120	**$1,404**
106783	55.2 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	68	SF	$120	**$8,208**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **OAK ST** **$49,572.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151143	PINE ST	PECAN AVE	INDEPENDENCE DRIVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82124	0.8 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82125	4.8 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
82126	11.2 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82127	24.3 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82128	29.3 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
82129	38.4 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
82130	46.8 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
82131	57.3 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82132	63.6 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
82175	69.5 to 70.9 feet		5.0-6.0%	5 ft	7			
82133	71.0 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
82119	72.9 to 73.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
82134	85.2 to 98.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
82135	98.9 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
82136	125.3 to 138.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
82137	139.3 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
82138	151.4 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82139	154.8 to 160.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,420**
82140	161.0 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
82141	168.3 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
82142	178.2 to 183.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,080**
82143	183.9 to 233.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	248	SF	$40	**$9,920**
82120	199.5 to 200.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
82144	236.3 to 240.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
82145	241.3 to 272.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
82146	277.8 to 285.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
82147	285.8 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
82121	300.8 to 301.8 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151143	PINE ST	PECAN AVE	INDEPENDENCE DRIVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82148	301.3 to 303.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
82149	305.8 to 308.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
82150	310.5 to 312.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
82151	316.3 to 319.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
82152	326.0 to 349.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
82153	353.0 to 384.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
82154	384.2 to 389.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
82155	392.9 to 403.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
82156	403.6 to 418.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
82157	422.3 to 430.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
82122	426.9 to 427.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
82158	434.5 to 444.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
82159	447.5 to 455.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
82160	461.9 to 468.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
82161	468.7 to 470.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82162	476.3 to 481.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
82163	487.2 to 489.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
82164	499.3 to 506.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
82165	509.0 to 510.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82166	511.5 to 514.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
82167	514.9 to 543.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
82123	522.6 to 523.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
82168	545.7 to 548.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
82169	552.3 to 553.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82170	555.4 to 569.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,340**
82171	571.4 to 573.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82172	575.7 to 577.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
82173	578.3 to 580.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151143	PINE ST	PECAN AVE	INDEPENDENCE DRIVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82174	583.8 to 592.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**

TOTAL COST FOR: E *side of* **PINE ST** *Starting at:* **PECAN AVE** **$239,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E	2201131324	PINEWOOD CT	920 PINEWOOD CT	PINEWOOD DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97643	0.5 to 13.9 feet	Key Note Segment		5 ft	67			
97644	19.8 to 33.2 feet	Key Note Segment		5 ft	67			
97629	21.2 to 22.2 feet	Vertical Change	.29"	5 ft	5	REF		
97630	29.6 to 30.6 feet	Vertical Change	.56"	5 ft	5	REF		
97635	34.9 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
97645	36.5 to 49.0 feet	Key Note Segment		5 ft	63			
97636	49.0 to 51.9 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	15	SF	$40	**$580**
97646	58.8 to 71.9 feet	Key Note Segment		5 ft	66			
97631	59.8 to 60.8 feet	Vertical Change	-.27"	5 ft	5	REF		
97637	72.1 to 75.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	**$740**
97647	75.8 to 88.3 feet	Key Note Segment		5 ft	63			
97638	89.3 to 92.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
97632	91.5 to 92.5 feet	Vertical Change	.28"	5 ft	5	REF		
97639	92.0 to 93.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
97648	94.3 to 109.2 feet	Key Note Segment		5 ft	75			
97633	96.5 to 97.5 feet	Vertical Change	.32"	5 ft	5	REF		
97634	101.4 to 102.4 feet	Vertical Change	1.72"	5 ft	5	REF		
97640	122.6 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
97641	139.2 to 145.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
97642	145.7 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
97649	147.2 to 148.2 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S/E *side of* **PINEWOOD CT** *Starting at:* **920 PINEWOOD CT** **$18,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201131318	PINEWOOD CT	PINEWOOD DR	PINEWOOD DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97569	0.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
97570	11.0 to 12.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
97571	14.8 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
97572	20.8 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
97583	35.1 to 48.1 feet	Key Note Segment		5 ft	65			
97573	48.3 to 54.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,160**
97567	51.2 to 52.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
97584	54.1 to 66.3 feet	Key Note Segment		5 ft	61			
97574	66.3 to 70.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$860**
97585	71.5 to 84.3 feet	Key Note Segment		5 ft	64			
97575	90.8 to 92.3 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	8	SF	$120	**$900**
97586	92.5 to 106.3 feet	Key Note Segment		5 ft	69			
97587	108.2 to 124.3 feet	Key Note Segment		5 ft	81			
97568	125.9 to 126.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
97576	126.2 to 127.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
97588	130.2 to 143.6 feet	Key Note Segment		5 ft	67			
97577	144.0 to 146.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
97589	146.6 to 160.7 feet	Key Note Segment		5 ft	70			
97578	160.7 to 162.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	11	SF	$40	**$420**
97579	163.2 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
97590	168.2 to 181.7 feet	Key Note Segment		5 ft	68			
97580	183.1 to 184.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
97591	185.8 to 205.2 feet	Key Note Segment		5 ft	97			
97581	205.2 to 206.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
97582	208.8 to 215.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**

TOTAL COST FOR: E/N/W *side of* **PINEWOOD CT** *Starting at:* **PINEWOOD DR** **$21,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131322	PINEWOOD CT	PINEWOOD DR	920 PINEWOOD CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97619	1.8 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
97620	12.0 to 13.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
97621	14.3 to 16.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**
97626	16.7 to 30.8 feet	Key Note Segment		5 ft	71			
97622	30.8 to 32.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	7	SF	$40	**$280**
97617	31.0 to 32.0 feet	**Vertical Change**	-.43"	5 ft	5	REF		
97623	32.2 to 34.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
97624	35.1 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
97627	36.3 to 47.9 feet	Key Note Segment		5 ft	58			
97625	48.9 to 52.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
97618	49.8 to 50.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
97628	51.4 to 52.8 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **PINEWOOD CT** *Starting at:* **PINEWOOD DR** **$12,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131321	PINEWOOD DR	GRANADA DR	PINEWOOD CT	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97608	1.8 to 9.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
97614	9.7 to 10.8 feet		5.0-6.0%	5 ft	6			
97609	12.8 to 17.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	25	SF	$120	**$3,060**
97610	17.9 to 47.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	148	SF	$120	**$17,700**
97603	21.6 to 22.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
97611	47.4 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
97604	47.6 to 48.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
97605	57.1 to 58.1 feet	**Vertical Change**	3.34"	5 ft	5	REF		
97612	67.3 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
97613	74.7 to 92.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
97607	84.5 to 85.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
97615	89.6 to 91.5 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: S *side of* **PINEWOOD DR** *Starting at:* **GRANADA DR** **$51,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160835	PINEWOOD DR	MONOCOTT DR	N GRANADA DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68881	1.1 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
68882	12.7 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
68883	20.6 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
68933	25.3 to 39.3 feet	Key Note Segment		5 ft	70			
68884	40.3 to 57.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
68885	57.2 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
68846	57.6 to 58.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
68934	73.1 to 87.8 feet	Key Note Segment		5 ft	74			
68847	88.9 to 89.9 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
68886	108.5 to 110.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68935	126.8 to 141.8 feet	Key Note Segment		5 ft	75			
68887	150.7 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68888	156.0 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
68936	183.8 to 198.5 feet	Key Note Segment		5 ft	74			
68850	185.7 to 186.7 feet	**Vertical Change**	-.51"	5 ft	5	REF		
68951	204.5 to 205.5 feet		5.0-6.0%	5 ft	5			
68851	205.6 to 206.6 feet	**Vertical Change**	1.67"	5 ft	5	SF	$75	**$375**
68889	208.7 to 210.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	11	SF	$120	**$1,260**
68852	211.7 to 212.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
68890	214.6 to 221.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
68853	220.6 to 221.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
68854	222.4 to 223.4 feet	**Vertical Change**	-1.1"	5 ft	5	SF	$75	**$375**
68937	238.3 to 283.1 feet	Key Note Segment		5 ft	224			
68855	240.0 to 241.0 feet	**Vertical Change**	-2.56"	5 ft	5	REF		
68856	253.9 to 254.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
68857	260.3 to 261.3 feet	**Vertical Change**	1.73"	5 ft	5	REF		
68858	266.1 to 267.1 feet	**Vertical Change**	.58"	5 ft	5	REF		
68859	270.6 to 271.6 feet	**Vertical Change**	.54"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160835	PINEWOOD DR	MONOCOTT DR	N GRANADA DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68891	283.1 to 287.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	$960
68892	291.3 to 294.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
68938	294.6 to 310.5 feet	Key Note Segment		5 ft	79			
68860	326.0 to 327.0 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
68893	340.7 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
68894	351.1 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
68939	354.5 to 368.2 feet	Key Note Segment		5 ft	69			
68895	370.3 to 373.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	$2,100
68896	374.3 to 383.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	$5,700
68897	386.2 to 390.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
68898	392.2 to 408.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	$9,660
68940	408.3 to 422.4 feet	Key Note Segment		5 ft	71			
68899	422.4 to 462.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	199	SF	$40	$7,940
68900	462.1 to 464.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
68941	465.0 to 480.5 feet	Key Note Segment		5 ft	78			
68901	481.1 to 482.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
68902	482.8 to 484.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
68903	496.7 to 511.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
68904	514.3 to 522.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
68942	522.8 to 547.7 feet	Key Note Segment		5 ft	125			
68861	523.6 to 524.6 feet	Vertical Change	.33"	5 ft	5	REF		
68862	534.7 to 535.7 feet	Vertical Change	-.46"	5 ft	5	REF		
68863	541.9 to 542.9 feet	Vertical Change	.36"	5 ft	5	REF		
68864	551.9 to 552.9 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
68905	562.7 to 565.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
68906	567.8 to 569.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
68865	576.1 to 577.1 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
68943	576.3 to 591.0 feet	Key Note Segment		5 ft	74			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160835	PINEWOOD DR	MONOCOTT DR	N GRANADA DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68907	597.4 to 601.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
68866	613.5 to 614.5 feet	**Vertical Change**	-.65"	5 ft	5	SF	$75	**$375**
68908	626.2 to 630.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
68944	630.3 to 644.6 feet	Key Note Segment		5 ft	72			
68909	646.0 to 654.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
68910	660.8 to 682.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
68867	663.2 to 664.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
68945	683.6 to 697.0 feet	Key Note Segment		5 ft	67			
68911	698.5 to 699.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68868	709.1 to 710.1 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
68869	716.2 to 717.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
68912	716.2 to 718.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68913	720.8 to 721.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
68914	721.8 to 734.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
68946	738.4 to 753.7 feet	Key Note Segment		5 ft	77			
68915	771.4 to 780.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
68916	784.0 to 792.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
68947	795.1 to 808.3 feet	Key Note Segment		5 ft	66			
68917	808.8 to 812.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68871	810.2 to 811.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
68872	818.9 to 821.8 feet	**Vertical Change**	.26"	5 ft	15	LF	$75	**$1,088**
68918	820.4 to 821.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68919	824.1 to 843.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
68873	833.9 to 834.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
68948	846.1 to 857.9 feet	Key Note Segment		5 ft	59			
68920	857.9 to 859.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	10	SF	$40	**$380**
68921	860.5 to 861.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
68922	861.8 to 862.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160835	PINEWOOD DR	MONOCOTT DR	N GRANADA DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68874	879.3 to 880.3 feet	**Vertical Change**	2.11"	5 ft	5	SF	$75	**$375**
68952	882.8 to 883.9 feet		6.0-7.0%	5 ft	6			
68949	892.0 to 913.2 feet	Key Note Segment		5 ft	106			
68875	895.0 to 896.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
68876	902.0 to 903.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
68923	914.6 to 917.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	14	SF	$120	**$1,620**
68877	915.1 to 916.1 feet	**Vertical Change**	-.43"	5 ft	5	REF		
68924	918.3 to 921.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	14	SF	$120	**$1,680**
68925	923.2 to 928.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,060**
68926	929.8 to 941.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,020**
68927	941.8 to 955.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
68928	957.0 to 963.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
68950	965.3 to 979.5 feet	Key Note Segment		5 ft	71			
68879	966.5 to 967.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
68929	983.7 to 986.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68930	990.3 to 1001.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
68880	1000.5 to 1001.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
68931	1004.4 to 1007.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
68932	1007.5 to 1010.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: S *side of* **PINEWOOD DR** *Starting at:* **MONOCOTT DR** **$205,637.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160829	PINEWOOD DR	N GRANADA DR	MONOCOTT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68748	0.0 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
68720	6.1 to 7.1 feet	**Vertical Change**	1.24"	5 ft	5	SF	$75	**$375**
68749	19.5 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
68827	21.6 to 35.7 feet	Key Note Segment		5 ft	71			
68721	23.1 to 24.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
68750	36.3 to 46.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	49	SF	$40	**$1,940**
68722	36.9 to 37.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
68828	48.1 to 62.8 feet	Key Note Segment		5 ft	74			
68723	50.1 to 51.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
68751	63.1 to 67.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
68724	64.0 to 65.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
68752	67.4 to 77.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
68725	76.7 to 77.7 feet	**Vertical Change**	1.6"	5 ft	5	REF		
68753	77.2 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
68754	93.6 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
68755	99.9 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
68756	104.4 to 113.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
68757	114.0 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
68758	122.1 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
68829	127.3 to 136.0 feet	Key Note Segment		5 ft	44			
68759	137.1 to 138.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
68760	138.3 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
68761	151.8 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
68762	164.3 to 173.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
68830	173.8 to 186.4 feet	Key Note Segment		5 ft	63			
68763	191.8 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
68726	198.0 to 199.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
68764	203.2 to 205.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160829	PINEWOOD DR	N GRANADA DR	MONOCOTT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68765	215.8 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
68766	223.8 to 227.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
68831	227.4 to 242.8 feet	Key Note Segment		5 ft	77			
68767	242.8 to 247.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$940**
68727	249.3 to 250.3 feet	**Vertical Change**	1.32"	5 ft	5	SF	$75	**$375**
68768	261.2 to 264.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
68769	268.0 to 274.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
68770	280.3 to 281.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
68832	281.5 to 295.4 feet	Key Note Segment		5 ft	69			
68771	295.4 to 306.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,200**
68728	302.7 to 303.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
68772	306.4 to 315.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
68773	315.4 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68774	321.3 to 336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
68729	322.1 to 323.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
68775	340.3 to 341.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
68833	342.3 to 357.2 feet	Key Note Segment		5 ft	75			
68776	357.2 to 360.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
68730	358.2 to 359.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
68777	362.1 to 363.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
68778	365.8 to 366.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
68779	366.8 to 368.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
68780	376.3 to 398.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
68731	381.8 to 382.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
68781	400.5 to 402.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68834	402.9 to 417.0 feet	Key Note Segment		5 ft	71			
68782	418.3 to 419.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
68783	421.3 to 426.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160829	PINEWOOD DR	N GRANADA DR	MONOCOTT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68733	426.6 to 427.6 feet	Vertical Change	.91"	5 ft	5	REF		
68784	427.1 to 428.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
68785	431.8 to 435.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$2,040
68835	436.0 to 452.1 feet	Key Note Segment		5 ft	81			
68786	452.1 to 455.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	19	SF	$40	$760
68787	455.9 to 464.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	$4,860
68788	464.0 to 469.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	$3,480
68789	470.2 to 480.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	$6,300
68734	479.8 to 480.8 feet	Vertical Change	-1.22"	5 ft	5	REF		
68790	481.4 to 482.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
68735	481.6 to 482.6 feet	Vertical Change	.79"	5 ft	5	REF		
68791	489.1 to 493.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
68792	495.3 to 504.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
68793	507.8 to 510.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,740
68836	510.7 to 525.1 feet	Key Note Segment		5 ft	72			
68794	525.1 to 527.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$560
68736	536.7 to 537.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
68837	537.4 to 551.3 feet	Key Note Segment		5 ft	69			
68795	551.3 to 571.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	100	SF	$40	$4,000
68737	552.3 to 553.3 feet	Vertical Change	.5"	5 ft	5	REF		
68796	576.8 to 582.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
68738	584.3 to 585.3 feet	Vertical Change	.61"	5 ft	5	SF	$75	$375
68797	591.9 to 601.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
68798	605.6 to 613.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,620
68838	615.2 to 630.6 feet	Key Note Segment		5 ft	77			
68739	617.7 to 618.7 feet	Vertical Change	.27"	5 ft	5	REF		
68799	630.6 to 634.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	20	SF	$40	$800
68740	631.5 to 632.5 feet	Vertical Change	-.37"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160829	PINEWOOD DR	N GRANADA DR	MONOCOTT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68800	637.5 to 652.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
68741	651.0 to 652.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
68801	652.3 to 669.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
68839	669.2 to 683.0 feet	Key Note Segment		5 ft	69			
68802	684.7 to 687.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
68803	687.8 to 691.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
68804	692.5 to 693.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
68805	693.8 to 698.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
68806	702.9 to 706.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
68807	706.8 to 721.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
68840	721.4 to 735.8 feet	Key Note Segment		5 ft	72			
68808	735.9 to 737.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
68742	736.6 to 737.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
68841	748.0 to 762.2 feet	Key Note Segment		5 ft	71			
68743	748.5 to 749.5 feet	**Vertical Change**	-.47"	5 ft	5	REF		
68809	762.5 to 770.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,500**
68810	778.1 to 785.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
68811	789.5 to 790.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68812	807.3 to 825.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
68744	826.0 to 827.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
68842	826.0 to 839.8 feet	Key Note Segment		5 ft	69			
68745	827.9 to 828.9 feet	**Vertical Change**	-.42"	5 ft	5	REF		
68813	859.0 to 861.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
68814	866.3 to 871.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
68815	875.3 to 878.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
68843	878.4 to 894.3 feet	Key Note Segment		5 ft	80			
68816	894.3 to 911.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	84	SF	$40	**$3,360**
68817	916.4 to 923.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109160829	PINEWOOD DR	N GRANADA DR	MONOCOTT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68818	923.3 to 930.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
68844	930.6 to 946.3 feet	Key Note Segment		5 ft	79			
68746	933.2 to 934.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
68819	946.3 to 947.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
68820	953.8 to 955.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
68845	956.9 to 970.7 feet	Key Note Segment		5 ft	69			
68821	971.2 to 973.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**
68822	976.0 to 984.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
68823	986.3 to 987.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68747	987.6 to 988.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
68824	989.6 to 990.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
68825	990.8 to 1008.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
68826	1010.8 to 1015.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: N *side of* **PINEWOOD DR** *Starting at:* **N GRANADA DR** **$250,405.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131319	PINEWOOD DR	PINEWOOD CT	GRANADA DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97592	0.4 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
97593	7.6 to 13.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
97594	13.3 to 15.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
97595	15.4 to 19.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
97596	20.0 to 24.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
97597	24.8 to 28.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
97598	28.9 to 41.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
97599	43.3 to 47.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
97600	49.3 to 54.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
97601	55.8 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
97602	69.1 to 85.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**

TOTAL COST FOR: N *side of* **PINEWOOD DR** *Starting at:* **PINEWOOD CT** **$45,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131325	PINEWOOD DR	PINEWOOD CT	VALLEY WAY	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97652	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
97653	4.0 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
97654	8.2 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
97668	10.8 to 26.4 feet	Key Note Segment		5 ft	78			
97655	27.7 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
97656	36.8 to 70.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,100**
97657	70.3 to 74.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
97658	75.6 to 81.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
97659	84.4 to 93.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
97660	95.5 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
97661	101.3 to 108.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,020**
97662	108.0 to 126.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	91	SF	$120	**$10,860**
97650	124.2 to 125.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
97663	127.8 to 146.4 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	93	SF	$120	**$11,160**
97664	146.4 to 147.7 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	**$780**
97665	149.5 to 158.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	46	SF	$120	**$5,520**
97669	159.2 to 172.2 feet	Key Note Segment		5 ft	65			
97651	160.1 to 161.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
97666	173.7 to 177.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
97667	177.6 to 180.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
97670	179.7 to 180.7 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **PINEWOOD DR** *Starting at:* **PINEWOOD CT** **$78,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131316	PINEWOOD DR	VALLEY WAY	PINEWOOD CT	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97566	0.0 to 1.3 feet		5.0-6.0%	5 ft	7			
97550	0.1 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
97551	14.2 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
97552	20.1 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
97553	27.5 to 37.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,180**
97554	40.4 to 43.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
97555	43.0 to 69.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	131	SF	$120	**$15,720**
97549	51.6 to 52.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
97556	71.7 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
97557	90.6 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
97558	112.1 to 127.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
97559	129.3 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
97560	141.3 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
97561	149.2 to 156.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
97565	157.3 to 164.7 feet	Key Note Segment		5 ft	37			
97562	164.9 to 168.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	17	SF	$40	**$660**
97563	168.2 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
97564	182.5 to 184.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **PINEWOOD DR** *Starting at:* **VALLEY WAY** **$93,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111351	PLUMAS ST	160 PLUMAS ST	S DOUBLE TREE WAY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92230	1.1 to 59.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	292	SF	$120	**$35,040**
92225	4.7 to 5.7 feet	**Vertical Change**	.82"	5 ft	5	REF		
92226	13.9 to 14.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
92232	41.2 to 42.6 feet		6.0-7.0%	5 ft	7			
92227	41.6 to 42.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
92231	62.2 to 69.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
92233	68.3 to 69.4 feet		5.0-6.0%	5 ft	6			
92229	69.3 to 70.3 feet	**Vertical Change**	.57"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **PLUMAS ST** *Starting at:* **160 PLUMAS ST** **$39,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251131	PLUMAS ST	30 PLUMAS ST	DWYER AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108050	2.2 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
108042	5.1 to 6.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
108043	13.0 to 14.0 feet	**Vertical Change**	.47"	5 ft	5	REF		
108051	13.3 to 31.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
108052	37.3 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108044	40.3 to 41.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
108053	57.8 to 62.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
108054	63.6 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
108055	68.6 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,820**
108056	107.8 to 116.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
108057	132.9 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
108045	134.8 to 135.8 feet	**Vertical Change**	.52"	5 ft	5	REF		
108058	146.8 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
108059	156.3 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
108060	178.3 to 182.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108061	191.8 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
108062	204.1 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
108063	218.8 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
108046	250.2 to 251.2 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
108064	255.6 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108047	273.6 to 274.6 feet	**Vertical Change**	.93"	5 ft	5	SF	$75	**$375**
108065	276.8 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	292	SF	$120	**$35,040**
108048	307.9 to 308.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
108066	337.3 to 363.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
108067	363.0 to 375.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
108068	376.3 to 383.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
108049	388.6 to 389.6 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
108069	390.2 to 392.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251131	PLUMAS ST	30 PLUMAS ST	DWYER AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **PLUMAS ST**	*Starting at:* **30 PLUMAS ST**					**$149,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111349	PLUMAS ST	3043 PLUMAS ST	3085 PLUMAS ST	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92209	0.4 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
92220	2.1 to 29.5 feet	Key Note Segment		5 ft	137			
92205	28.9 to 29.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
92210	32.3 to 36.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
92211	36.4 to 43.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
92224	39.9 to 41.3 feet		5.0-6.0%	5 ft	7			
92212	44.1 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
92213	82.8 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
92221	94.9 to 115.3 feet	Key Note Segment		5 ft	102			
92214	118.1 to 122.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
92215	122.9 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
92222	129.5 to 154.0 feet	Key Note Segment		5 ft	123			
92216	155.8 to 168.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
92217	168.4 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
92206	179.2 to 180.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
92218	185.7 to 218.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	162	SF	$120	**$19,380**
92207	193.3 to 194.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
92223	219.9 to 240.4 feet	Key Note Segment		5 ft	103			
92219	241.3 to 244.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
92208	243.6 to 244.6 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PLUMAS ST** *Starting at:* **3043 PLUMAS ST** **$80,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120854	PLUMAS ST	GRANADA DR	ST TROPEZ DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93487	0.6 to 3.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
93477	7.5 to 8.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
93488	7.8 to 33.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
93489	38.8 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
93490	45.7 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
93491	64.5 to 67.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
93492	67.4 to 96.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,580**
93493	104.0 to 151.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	238	SF	$120	**$28,560**
93494	154.2 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
93495	165.2 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
93496	177.5 to 203.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
93478	203.0 to 204.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
93497	210.6 to 215.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
93498	225.3 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
93499	260.3 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
93500	274.6 to 306.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
93501	308.6 to 329.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,780**
93502	332.2 to 338.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
93503	340.4 to 356.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
93504	357.1 to 380.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,800**
93505	381.0 to 387.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
93479	382.7 to 383.7 feet	**Vertical Change**	2.04"	5 ft	5	REF		
93506	388.8 to 394.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
93507	397.3 to 412.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
93508	412.2 to 414.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
93480	419.0 to 420.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
93525	421.9 to 449.7 feet	Key Note Segment		5 ft	139			
93509	450.3 to 460.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	53	SF	$40	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201120854	PLUMAS ST	GRANADA DR	ST TROPEZ DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93510	463.7 to 475.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
93511	477.3 to 479.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
93512	483.5 to 491.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
93513	491.9 to 493.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
93514	496.4 to 501.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
93515	505.3 to 529.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
93481	530.7 to 531.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
93516	535.3 to 541.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
93517	542.2 to 545.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
93482	543.5 to 544.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
93518	547.8 to 550.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
93519	550.5 to 551.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
93483	552.1 to 553.1 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
93520	554.3 to 557.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
93484	554.7 to 558.4 feet	**Vertical Change**	.31"	5 ft	18	REF		
93521	559.7 to 577.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,620**
93522	578.4 to 581.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93523	583.1 to 597.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
93485	585.6 to 586.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
93524	600.0 to 603.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
93526	600.0 to 603.4 feet		5.0-6.0%	5 ft	17			
93486	603.3 to 604.3 feet	**Vertical Change**	.87"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PLUMAS ST** *Starting at:* **GRANADA DR** **$271,425.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121043	PLUMAS ST	MAKENNA DR	ST TROPEZ DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94609	0.0 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
94610	17.1 to 23.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
94626	23.7 to 44.8 feet	Key Note Segment		5 ft	106			
94611	44.8 to 46.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	7	SF	$40	**$280**
94612	49.5 to 57.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
94613	57.5 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
94614	67.4 to 85.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
94627	85.0 to 105.0 feet	Key Note Segment		5 ft	100			
94615	105.8 to 114.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
94605	106.1 to 107.1 feet	**Vertical Change**	3.45"	5 ft	5	REF		
94628	114.2 to 133.8 feet	Key Note Segment		5 ft	98			
94616	134.3 to 138.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	20	SF	$40	**$820**
94617	139.0 to 154.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
94618	155.1 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
94619	179.9 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
94620	189.1 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
94621	197.8 to 204.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
94629	204.4 to 225.0 feet	Key Note Segment		5 ft	103			
94606	214.2 to 215.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
94622	226.9 to 234.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
94630	234.0 to 254.7 feet	Key Note Segment		5 ft	104			
94607	244.1 to 245.1 feet	**Vertical Change**	-.55"	5 ft	5	REF		
94608	253.9 to 254.9 feet	**Vertical Change**	.79"	5 ft	5	REF		
94623	255.4 to 259.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$860**
94624	259.7 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
94625	268.8 to 281.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
94631	278.8 to 281.1 feet		5.0-6.0%	5 ft	12			
94632	278.8 to 281.1 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121043	PLUMAS ST	MAKENNA DR	ST TROPEZ DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **PLUMAS ST**	*Starting at:* **MAKENNA DR**					**$95,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111345	PLUMAS ST	S DOUBLE TREE WAY	S WOLFTRAP ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92167	3.8 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
92161	13.5 to 14.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
92184	27.1 to 47.7 feet	Key Note Segment		5 ft	103			
92168	48.7 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
92185	56.7 to 76.9 feet	Key Note Segment		5 ft	101			
92169	78.9 to 81.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
92170	81.1 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
92171	87.0 to 91.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
92172	94.9 to 140.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	226	SF	$120	**$27,060**
92162	111.9 to 112.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
92186	140.0 to 160.1 feet	Key Note Segment		5 ft	101			
92163	150.6 to 151.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
92164	157.3 to 160.9 feet	**Vertical Change**	.28"	5 ft	18	REF		
92173	160.8 to 163.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,620**
92174	163.5 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
92175	171.3 to 175.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
92187	175.9 to 196.2 feet	Key Note Segment		5 ft	102			
92165	186.7 to 187.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
92166	193.6 to 194.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
92176	198.2 to 200.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
92177	204.0 to 212.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
92178	212.8 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
92179	230.4 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
92188	237.3 to 258.3 feet	Key Note Segment		5 ft	105			
92180	258.8 to 260.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
92181	262.5 to 276.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
92182	276.4 to 281.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
92183	281.3 to 283.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111345	PLUMAS ST	S DOUBLE TREE WAY	S WOLFTRAP ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **PLUMAS ST**	*Starting at:* **S DOUBLE TREE WAY**					**$92,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111347	PLUMAS ST	S WOLFTRAP ST	3029 PLUMAS ST	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92192	0.3 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
92193	9.8 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
92194	15.3 to 23.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
92202	24.3 to 46.2 feet	Key Note Segment		5 ft	110			
92195	51.5 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
92203	57.1 to 82.3 feet	Key Note Segment		5 ft	126			
92189	58.0 to 59.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
92196	82.8 to 96.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
92197	96.7 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
92190	106.5 to 107.5 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
92198	109.4 to 111.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
92199	115.4 to 116.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
92200	117.6 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
92191	125.8 to 126.8 feet	**Vertical Change**	1.81"	5 ft	5	REF		
92201	139.9 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
92204	147.6 to 169.6 feet	Key Note Segment		5 ft	110			

TOTAL COST FOR: N *side of* **PLUMAS ST** *Starting at:* **S WOLFTRAP ST** **$50,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121047	PLUMAS ST	ST TROPEZ DR	MAKENNA DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94639	0.0 to 12.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
94640	16.3 to 21.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
94663	21.8 to 42.4 feet	Key Note Segment		5 ft	103			
94633	22.8 to 23.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
94634	32.4 to 33.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
94641	42.4 to 47.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	24	SF	$40	**$940**
94642	48.5 to 50.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
94643	52.4 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
94664	53.8 to 74.8 feet	Key Note Segment		5 ft	105			
94635	73.4 to 74.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
94644	74.8 to 123.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	245	SF	$40	**$9,780**
94645	125.8 to 127.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
94646	128.3 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
94647	131.4 to 133.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
94648	135.8 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
94665	140.3 to 160.8 feet	Key Note Segment		5 ft	103			
94636	159.8 to 160.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
94649	160.8 to 161.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$220**
94650	162.8 to 170.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
94666	171.3 to 191.1 feet	Key Note Segment		5 ft	99			
94651	192.0 to 205.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
94652	207.8 to 211.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
94653	212.3 to 217.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
94654	217.0 to 226.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
94667	226.8 to 257.8 feet	Key Note Segment		5 ft	155			
94655	258.8 to 265.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
94656	266.3 to 269.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
94657	269.6 to 271.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121047	PLUMAS ST	ST TROPEZ DR	MAKENNA DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94658	273.0 to 274.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
94659	275.5 to 284.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
94638	276.3 to 277.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
94660	287.2 to 289.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
94668	289.4 to 310.0 feet	Key Note Segment		5 ft	103			
94661	315.6 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
94662	323.5 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
94669	327.7 to 329.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **PLUMAS ST** *Starting at:* **ST TROPEZ DR** **$72,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121107	PLUMAS STREET	BERRY DRIVE	GRANADA DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94852	0.3 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
94853	15.0 to 18.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
94876	20.5 to 40.5 feet	Key Note Segment		5 ft	100			
94838	21.6 to 22.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
94839	40.2 to 41.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
94854	42.3 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
94877	49.3 to 70.4 feet	Key Note Segment		5 ft	106			
94840	49.8 to 50.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
94841	59.0 to 60.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
94855	71.3 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
94842	71.9 to 72.9 feet	**Vertical Change**	.59"	5 ft	5	REF		
94856	84.5 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
94843	110.2 to 111.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
94857	111.5 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
94844	122.0 to 123.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
94878	133.9 to 154.0 feet	Key Note Segment		5 ft	101			
94845	135.0 to 136.0 feet	**Vertical Change**	.43"	5 ft	5	REF		
94846	153.7 to 154.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
94858	156.3 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94859	159.4 to 160.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94879	161.1 to 181.8 feet	Key Note Segment		5 ft	104			
94847	172.5 to 173.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
94860	183.4 to 184.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
94861	185.7 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
94862	195.0 to 212.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
94848	196.3 to 197.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
94849	208.1 to 209.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
94863	214.6 to 218.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121107	PLUMAS STREET	BERRY DRIVE	GRANADA DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94864	220.8 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
94865	232.6 to 237.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
94866	238.4 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
94880	246.0 to 266.2 feet	Key Note Segment		5 ft	101			
94867	269.2 to 273.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
94881	273.8 to 293.8 feet	Key Note Segment		5 ft	100			
94850	274.9 to 275.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
94868	294.3 to 308.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	70	SF	$40	**$2,780**
94869	311.2 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
94870	316.3 to 317.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
94871	318.7 to 328.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
94882	328.3 to 357.1 feet	Key Note Segment		5 ft	144			
94872	358.1 to 359.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
94873	359.9 to 365.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
94851	366.7 to 367.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
94874	368.8 to 377.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
94875	377.5 to 389.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
94883	386.2 to 388.8 feet		5.0-6.0%	5 ft	13			
94884	386.2 to 388.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: S *side of* **PLUMAS STREET** *Starting at:* **BERRY DRIVE** **$101,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121104	PLUMAS STREET	ST TROPEZ DR	BERRY DRIVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94826	0.0 to 9.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,820**
94827	11.9 to 43.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	156	SF	$120	**$18,660**
94828	47.3 to 58.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
94829	59.3 to 69.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	52	SF	$120	**$6,240**
94830	70.7 to 71.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
94822	72.4 to 73.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94831	73.4 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
94832	83.7 to 92.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
94823	86.1 to 87.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
94833	94.8 to 99.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
94834	100.4 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
94835	113.2 to 125.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
94824	122.9 to 123.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
94836	130.8 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,980**
94837	145.7 to 146.8 feet		5.0-6.0%	5 ft	6			
94825	147.1 to 148.1 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **PLUMAS STREET** *Starting at:* **ST TROPEZ DR** **$73,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131249	PLUMWOOD WAY	ASPEN LN	SUNDANCE LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62550	1.8 to 15.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
62601	15.9 to 34.7 feet	Key Note Segment		5 ft	94			
62515	18.2 to 19.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
62516	27.2 to 28.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
62551	38.6 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
62552	47.5 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
62602	56.8 to 81.7 feet	Key Note Segment		5 ft	125			
62517	58.4 to 59.4 feet	**Vertical Change**	.4"	5 ft	5	REF		
62518	85.6 to 86.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
62553	90.1 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
62519	99.7 to 100.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
62554	113.3 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62520	113.9 to 114.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
62521	126.5 to 127.5 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
62603	131.8 to 155.6 feet	Key Note Segment		5 ft	119			
62522	133.5 to 134.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
62523	144.7 to 145.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
62555	155.6 to 159.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
62524	156.1 to 157.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
62556	162.2 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
62557	164.3 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62558	170.9 to 172.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
62559	174.8 to 182.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
62604	182.7 to 206.3 feet	Key Note Segment		5 ft	118			
62560	207.7 to 219.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
62525	207.8 to 208.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
62526	216.1 to 217.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
62605	219.9 to 235.1 feet	Key Note Segment		5 ft	76			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131249	PLUMWOOD WAY	ASPEN LN	SUNDANCE LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62561	235.3 to 238.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$580
62562	241.8 to 260.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$11,040
62563	265.3 to 266.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
62564	278.8 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
62606	289.3 to 311.0 feet	Key Note Segment		5 ft	109			
62565	312.4 to 317.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
62566	336.6 to 343.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
62527	338.6 to 339.6 feet	Vertical Change	.28"	5 ft	5	REF		
62607	343.8 to 365.3 feet	Key Note Segment		5 ft	108			
62567	367.8 to 370.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
62568	377.1 to 384.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
62528	382.7 to 383.7 feet	Vertical Change	.33"	5 ft	5	REF		
62569	388.1 to 392.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
62570	397.6 to 404.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
62529	404.4 to 405.4 feet	Vertical Change	.34"	5 ft	5	REF		
62608	404.7 to 420.0 feet	Key Note Segment		5 ft	77			
62571	426.8 to 430.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
62609	430.8 to 445.1 feet	Key Note Segment		5 ft	72			
62530	432.5 to 433.5 feet	Vertical Change	-.29"	5 ft	5	REF		
62572	449.9 to 450.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
62573	453.7 to 455.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
62531	464.1 to 465.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
62574	481.3 to 486.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
62610	486.6 to 500.8 feet	Key Note Segment		5 ft	71			
62575	501.8 to 504.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
62532	502.0 to 503.0 feet	Vertical Change	.33"	5 ft	5	REF		
62576	507.9 to 514.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
62534	539.9 to 540.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131249	PLUMWOOD WAY	ASPEN LN	SUNDANCE LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62577	551.4 to 555.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
62611	555.2 to 577.0 feet	Key Note Segment		5 ft	109			
62578	577.0 to 580.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$680**
62579	580.7 to 582.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
62612	588.9 to 604.2 feet	Key Note Segment		5 ft	77			
62535	594.7 to 595.7 feet	**Vertical Change**	.54"	5 ft	5	REF		
62580	605.3 to 607.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
62581	607.5 to 630.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
62536	622.1 to 623.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
62582	633.7 to 640.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
62583	643.3 to 656.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
62584	657.2 to 661.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
62613	662.0 to 684.7 feet	Key Note Segment		5 ft	114			
62585	685.9 to 687.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
62537	686.5 to 687.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
62538	689.9 to 690.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
62586	690.0 to 693.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
62587	695.8 to 700.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
62588	705.8 to 712.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
62589	715.0 to 722.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
62614	723.8 to 737.8 feet	Key Note Segment		5 ft	70			
62539	732.1 to 733.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
62590	737.9 to 754.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	83	SF	$40	**$3,300**
62615	755.5 to 768.9 feet	Key Note Segment		5 ft	67			
62540	762.9 to 763.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
62541	769.8 to 770.8 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
62591	781.1 to 785.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
62592	788.3 to 795.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109131249	PLUMWOOD WAY	ASPEN LN	SUNDANCE LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62542	792.0 to 793.0 feet	Vertical Change	-.26"	5 ft	5	REF		
62543	795.7 to 796.7 feet	Vertical Change	.33"	5 ft	5	REF		
62544	799.1 to 800.1 feet	Vertical Change	-.29"	5 ft	5	REF		
62593	799.7 to 806.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
62545	800.7 to 801.7 feet	Vertical Change	1.9"	5 ft	5	REF		
62594	807.8 to 809.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62546	818.6 to 819.6 feet	Vertical Change	.29"	5 ft	5	REF		
62595	819.3 to 831.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
62616	831.6 to 844.6 feet	Key Note Segment		5 ft	65			
62547	839.0 to 840.0 feet	Vertical Change	-.27"	5 ft	5	REF		
62596	845.2 to 849.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	23	SF	$40	**$920**
62597	853.6 to 861.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
62548	855.1 to 856.1 feet	Vertical Change	.32"	5 ft	5	REF		
62617	861.7 to 875.5 feet	Key Note Segment		5 ft	69			
62598	875.5 to 876.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
62599	879.1 to 891.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
62600	895.8 to 905.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
62618	904.2 to 905.7 feet		5.0-6.0%	5 ft	8			
62549	904.8 to 905.8 feet	Vertical Change	2.67"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **PLUMWOOD WAY** *Starting at:* **ASPEN LN** **$186,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131254	PLUMWOOD WAY	SUNDANCE LN	ASPEN LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62650	2.3 to 5.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
62619	4.8 to 5.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
62651	8.2 to 21.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
62685	22.6 to 50.0 feet	Key Note Segment		5 ft	137			
62652	55.6 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
62620	55.8 to 56.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
62686	61.9 to 76.5 feet	Key Note Segment		5 ft	73			
62621	77.6 to 78.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
62653	77.8 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
62654	108.4 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
62687	114.3 to 128.9 feet	Key Note Segment		5 ft	73			
62655	156.3 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62656	167.7 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
62622	189.5 to 190.5 feet	**Vertical Change**	2.33"	5 ft	5	REF		
62688	194.1 to 207.1 feet	Key Note Segment		5 ft	65			
62657	212.3 to 218.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
62658	228.2 to 244.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
62689	246.7 to 260.8 feet	Key Note Segment		5 ft	71			
62690	272.9 to 286.3 feet	Key Note Segment		5 ft	67			
62623	287.5 to 288.5 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
62624	321.6 to 322.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
62659	327.1 to 331.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
62625	331.5 to 332.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
62660	335.4 to 339.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
62626	342.2 to 343.2 feet	**Vertical Change**	2.35"	5 ft	5	SF	$75	**$375**
62691	351.2 to 367.8 feet	Key Note Segment		5 ft	83			
62627	352.2 to 353.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		
62628	368.3 to 369.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131254	PLUMWOOD WAY	SUNDANCE LN	ASPEN LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62661	371.2 to 375.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
62692	382.1 to 402.3 feet	Key Note Segment		5 ft	101			
62629	404.2 to 405.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
62630	410.9 to 411.9 feet	**Vertical Change**	-1.42"	5 ft	5	SF	$75	**$375**
62662	415.0 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
62693	432.8 to 457.2 feet	Key Note Segment		5 ft	122			
62631	435.8 to 436.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
62632	443.0 to 444.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
62663	480.1 to 483.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
62694	489.3 to 510.3 feet	Key Note Segment		5 ft	105			
62633	493.5 to 494.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
62634	495.2 to 496.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
62664	511.2 to 512.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
62665	516.3 to 521.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
62635	519.9 to 520.9 feet	**Vertical Change**	2.48"	5 ft	5	REF		
62636	524.4 to 525.4 feet	**Vertical Change**	3.36"	5 ft	5	SF	$75	**$375**
62666	526.5 to 533.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
62702	528.4 to 529.4 feet	**Protruding Object**	70"	5 ft	5	JOB	$99	**$99**
62637	531.1 to 532.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
62667	535.8 to 537.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62695	540.7 to 564.6 feet	Key Note Segment		5 ft	119			
62638	542.6 to 543.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
62639	557.9 to 558.9 feet	**Vertical Change**	3.25"	5 ft	5	REF		
62640	565.6 to 566.6 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
62668	570.7 to 576.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
62641	577.9 to 578.9 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
62696	594.8 to 616.3 feet	Key Note Segment		5 ft	108			
62669	622.0 to 631.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109131254	PLUMWOOD WAY	SUNDANCE LN	ASPEN LN	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62642	628.9 to 629.9 feet	Vertical Change	.26"	5 ft	5	REF		
62670	646.3 to 647.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
62697	647.6 to 669.4 feet	Key Note Segment		5 ft	109			
62644	671.1 to 672.1 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
62671	680.4 to 682.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
62672	684.8 to 687.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
62673	690.7 to 692.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
62698	700.6 to 722.6 feet	Key Note Segment		5 ft	110			
62645	702.6 to 703.6 feet	Vertical Change	.37"	5 ft	5	REF		
62646	716.0 to 717.0 feet	Vertical Change	.29"	5 ft	5	REF		
62674	726.8 to 738.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
62675	741.8 to 754.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	$7,620
62699	754.5 to 775.3 feet	Key Note Segment		5 ft	104			
62647	756.0 to 757.0 feet	Vertical Change	-.26"	5 ft	5	REF		
62676	776.0 to 777.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
62648	777.1 to 778.1 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
62677	782.9 to 784.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
62678	787.7 to 802.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,760
62649	804.6 to 805.6 feet	Vertical Change	3.08"	5 ft	5	SF	$75	$375
62679	813.7 to 823.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
62700	823.7 to 849.8 feet	Key Note Segment		5 ft	131			
62680	850.1 to 852.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
62681	855.3 to 857.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
62701	860.0 to 879.3 feet	Key Note Segment		5 ft	97			
62682	881.1 to 884.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
62683	895.5 to 902.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
62684	903.4 to 911.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$5,040

TOTAL COST FOR: S *side of* **PLUMWOOD WAY** *Starting at:* **SUNDANCE LN** **$140,139.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101510	PODRES LN	DRYSDALE WAY	LILLY ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57123	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
57124	3.1 to 5.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
57125	5.5 to 6.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
57126	6.6 to 17.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
57127	20.4 to 33.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	**$7,800**
57128	33.4 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
57129	35.5 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
57130	46.2 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
57131	67.0 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
57132	90.2 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
57133	99.2 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
57134	120.2 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
57135	128.7 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
57136	133.3 to 139.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
57137	140.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: NW *side of* **PODRES LN** *Starting at:* **DRYSDALE WAY** **$54,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101519	PODRES LN	LILLY ST	DRYSDALE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57193	3.6 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
57194	12.7 to 16.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
57191	16.2 to 17.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
57195	29.1 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
57192	29.4 to 30.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
57196	36.2 to 45.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
57197	47.6 to 54.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
57198	54.2 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
57199	60.7 to 65.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
57206	65.1 to 85.6 feet	Key Note Segment		5 ft	103			
57200	90.7 to 105.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
57201	105.0 to 106.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
57202	107.6 to 111.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
57203	111.5 to 120.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
57204	121.7 to 163.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	211	SF	$120	**$25,320**
57205	168.2 to 181.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: SE *side of* **PODRES LN** *Starting at:* **LILLY ST** **$77,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171227	POINT SUR DR	ASILOMAR DR	SANTA LUCIA DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89535	0.1 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
89536	13.8 to 26.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
89545	26.4 to 45.5 feet	Key Note Segment		5 ft	96			
89537	47.4 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
89546	53.5 to 72.3 feet	Key Note Segment		5 ft	94			
89538	74.0 to 118.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	222	SF	$120	**$26,580**
89550	88.0 to 89.1 feet		5.0-6.0%	5 ft	6			
89532	101.2 to 102.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
89539	118.8 to 119.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89540	121.3 to 126.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
89547	126.8 to 158.0 feet	Key Note Segment		5 ft	156			
89541	159.3 to 182.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	114	SF	$120	**$13,740**
89548	182.2 to 212.9 feet	Key Note Segment		5 ft	154			
89542	214.8 to 220.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
89549	220.9 to 250.2 feet	Key Note Segment		5 ft	147			
89533	239.7 to 240.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
89543	252.0 to 255.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
89534	255.3 to 256.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
89544	255.8 to 268.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
89551	266.2 to 268.8 feet		5.0-6.0%	5 ft	13			
89552	266.2 to 268.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: S *side of* **POINT SUR DR** *Starting at:* **ASILOMAR DR** **$75,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171142	POINT SUR DR	SANTA LUCIA DR	ASILOMAR DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89070	2.5 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
89091	6.2 to 26.6 feet	Key Note Segment		5 ft	102			
89071	27.2 to 38.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
89072	42.7 to 44.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
89092	46.2 to 66.7 feet	Key Note Segment		5 ft	103			
89073	67.5 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
89099	83.3 to 84.3 feet		5.0-6.0%	5 ft	5			
89074	93.3 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
89093	102.3 to 122.6 feet	Key Note Segment		5 ft	102			
89075	123.9 to 126.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
89094	129.9 to 150.0 feet	Key Note Segment		5 ft	101			
89064	149.4 to 150.4 feet	**Vertical Change**	-.39"	5 ft	5	REF		
89076	151.3 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,900**
89065	162.1 to 163.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
89095	183.5 to 203.1 feet	Key Note Segment		5 ft	98			
89066	184.3 to 185.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
89077	203.9 to 204.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
89078	204.9 to 233.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
89067	214.2 to 215.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
89079	237.4 to 238.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89080	241.1 to 247.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
89081	251.1 to 253.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
89096	253.2 to 284.6 feet	Key Note Segment		5 ft	157			
89082	285.5 to 291.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
89097	291.1 to 319.6 feet	Key Note Segment		5 ft	143			
89068	301.1 to 302.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
89083	320.7 to 333.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
89084	335.6 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171142	POINT SUR DR	SANTA LUCIA DR	ASILOMAR DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89085	339.5 to 345.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
89086	349.6 to 352.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
89069	349.9 to 350.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
89098	352.2 to 374.0 feet	Key Note Segment		5 ft	109			
89087	374.2 to 375.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
89088	375.2 to 380.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
89089	383.1 to 394.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
89090	394.9 to 396.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **POINT SUR DR** *Starting at:* **SANTA LUCIA DR** **$98,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081323	POLK AVE	CHAPIN ST	TRUMAN DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126952	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
126953	4.4 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,100**
126954	32.9 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	198	SF	$120	**$23,760**

TOTAL COST FOR: N *side of* **POLK AVE** *Starting at:* **CHAPIN ST** **$41,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081321	POLK AVE	TRUMAN DR	CHAPIN ST	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126950	0.8 to 47.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	233	SF	$120	**$27,900**
126949	37.1 to 38.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
126951	48.3 to 72.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**

TOTAL COST FOR: S *side of* **POLK AVE** *Starting at:* **TRUMAN DR** **$42,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191337	POMEGRANATE ST	HACIENDA ST	KNOX RD	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74029	0.2 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,914**
74025	5.1 to 6.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
74030	24.3 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,942**
74026	24.7 to 25.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
74027	29.2 to 30.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
74031	54.0 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,494**
74032	101.8 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
74033	116.6 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,862**
74034	125.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,692**
74044	146.5 to 168.6 feet	Key Note Segment		5 ft	99			
74035	169.3 to 170.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$234**
74036	172.0 to 186.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,046**
74045	186.9 to 207.3 feet	Key Note Segment		5 ft	92			
74037	210.9 to 214.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,836**
74038	216.8 to 219.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,350**
74039	222.3 to 230.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,536**
74040	231.3 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
74046	237.3 to 260.2 feet	Key Note Segment		5 ft	103			
74041	260.6 to 261.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$702**
74047	263.4 to 284.8 feet	Key Note Segment		5 ft	96			
74042	285.8 to 287.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
74043	287.1 to 293.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**

TOTAL COST FOR: N *side of* **POMEGRANATE ST** *Starting at:* **HACIENDA ST** **$70,002.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191429	POMEGRANATE ST	KNOX ST	PERSIMMON ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74470	1.3 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
74471	3.0 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,752**
74466	11.5 to 12.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
74472	15.0 to 22.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,158**
74477	22.7 to 44.4 feet	Key Note Segment		5 ft	98			
74467	23.9 to 24.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
74468	44.5 to 45.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
74473	45.2 to 46.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$756**
74474	46.6 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74478	49.0 to 70.2 feet	Key Note Segment		5 ft	95			
74475	71.7 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,994**
74476	83.3 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
74479	84.8 to 85.9 feet		5.0-6.0%	5 ft	5			
74469	85.0 to 86.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
74480	85.9 to 87.2 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: S *side of* **POMEGRANATE ST** *Starting at:* **KNOX ST** **$19,008.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191432	POMEGRANATE ST	PERSIMMON ST	HACIENDA ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
74483	1.3 to 16.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,154**
74484	16.4 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,374**
74485	24.9 to 30.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,132**
74486	32.8 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
74487	39.8 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,990**
74488	60.8 to 74.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,506**
74489	76.8 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,078**
74490	84.6 to 100.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,424**
74491	102.3 to 124.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,042**
74492	124.8 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,430**
74481	127.4 to 128.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
74482	130.7 to 131.7 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: S *side of* **POMEGRANATE ST** *Starting at:* **PERSIMMON ST** **$63,247.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271402	POMPEI ST	MILANO LANE	TRIVISO AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111244	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
111262	20.3 to 38.4 feet	Key Note Segment		5 ft	91			
111235	29.8 to 30.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
111245	41.0 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
111263	47.8 to 66.4 feet	Key Note Segment		5 ft	93			
111246	68.7 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
111247	85.9 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
111236	93.8 to 94.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
111248	101.0 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
111249	117.6 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
111264	125.5 to 145.2 feet	Key Note Segment		5 ft	98			
111265	152.2 to 175.5 feet	Key Note Segment		5 ft	117			
111250	175.7 to 207.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	157	SF	$40	**$6,280**
111251	228.8 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
111266	233.1 to 252.3 feet	Key Note Segment		5 ft	96			
111237	241.7 to 242.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
111252	258.5 to 262.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
111267	262.2 to 280.5 feet	Key Note Segment		5 ft	92			
111253	282.4 to 287.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
111254	295.2 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
111255	299.0 to 304.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
111256	309.0 to 310.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111257	332.6 to 335.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
111238	333.3 to 334.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
111268	339.8 to 366.2 feet	Key Note Segment		5 ft	132			
111258	368.2 to 369.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
111259	369.7 to 371.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111239	372.9 to 373.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271402	POMPEI ST	MILANO LANE	TRIVISO AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111260	374.8 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
111269	381.4 to 405.7 feet	Key Note Segment		5 ft	122			
111240	384.7 to 385.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
111261	408.0 to 411.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
111242	408.6 to 409.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
111243	411.1 to 412.1 feet	**Vertical Change**	.53"	5 ft	5	REF		
111270	412.0 to 430.7 feet	Key Note Segment		5 ft	94			

TOTAL COST FOR: E *side of* **POMPEI ST** *Starting at:* **MILANO LANE** **$50,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271428	POMPEI ST	TRIVISO AVE	MILANO LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111462	6.7 to 7.7 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
111472	59.2 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
111463	86.3 to 87.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
111464	95.0 to 96.0 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
111465	103.6 to 104.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
111473	111.2 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
111474	116.5 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
111480	119.0 to 138.5 feet	Key Note Segment		5 ft	98			
111475	141.7 to 148.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
111481	148.0 to 169.5 feet	Key Note Segment		5 ft	108			
111466	159.4 to 160.4 feet	Vertical Change	.37"	5 ft	5	REF		
111467	187.6 to 188.6 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
111476	190.7 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
111468	199.9 to 200.9 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
111477	203.1 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
111478	212.8 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
111482	224.7 to 246.8 feet	Key Note Segment		5 ft	111			
111469	237.1 to 238.1 feet	Vertical Change	-.27"	5 ft	5	REF		
111470	249.8 to 250.8 feet	Vertical Change	.27"	5 ft	5	REF		
111479	250.0 to 255.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
111483	256.3 to 277.3 feet	Key Note Segment		5 ft	105			
111471	294.4 to 295.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375

TOTAL COST FOR: W *side of* **POMPEI ST** *Starting at:* **TRIVISO AVE** **$23,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311356	POPOLI WAY	1420 POPOLI WAY	ASHLAN WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115526	0.3 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
115527	14.4 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
115528	22.8 to 26.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
115529	26.5 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
115522	27.0 to 28.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
115530	30.7 to 42.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
115531	42.5 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
115523	53.8 to 54.8 feet	**Vertical Change**	-.83"	5 ft	5	REF		
115536	57.9 to 71.4 feet	Key Note Segment		5 ft	68			
115532	72.9 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
115537	95.4 to 109.7 feet	Key Note Segment		5 ft	72			
115533	109.9 to 113.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
115534	114.7 to 121.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
115524	121.2 to 122.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
115535	124.4 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
115525	132.1 to 133.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **POPOLI WAY** *Starting at:* **1420 POPOLI WAY** **$48,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311410	POPOLI WAY	ASHLAN WAY	GABRIEL WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115637	0.0 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	33	SF	$120	**$3,984**
115638	10.2 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,464**
115654	22.3 to 37.8 feet	Key Note Segment		4 ft	62			
115629	29.9 to 30.9 feet	**Vertical Change**	.31"	4 ft	4	REF		
115639	40.1 to 41.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
115640	41.6 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
115655	49.6 to 63.7 feet	Key Note Segment		4 ft	56			
115630	50.5 to 51.5 feet	**Vertical Change**	-.36"	4 ft	4	REF		
115641	63.7 to 72.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	33	SF	$40	**$1,328**
115642	78.8 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
115643	91.4 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
115631	100.0 to 101.0 feet	**Vertical Change**	1.38"	4 ft	4	REF		
115644	103.2 to 115.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	49	SF	$120	**$5,904**
115632	107.6 to 108.6 feet	**Vertical Change**	-.42"	4 ft	4	LF	$75	**$300**
115633	113.8 to 114.8 feet	**Vertical Change**	.28"	4 ft	4	REF		
115656	128.1 to 141.7 feet	Key Note Segment		4 ft	54			
115645	141.8 to 155.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	54	SF	$40	**$2,160**
115657	155.3 to 167.5 feet	Key Note Segment		4 ft	49			
115634	159.8 to 160.8 feet	**Vertical Change**	.31"	4 ft	4	REF		
115635	167.5 to 168.5 feet	**Vertical Change**	.38"	4 ft	4	REF		
115646	171.3 to 179.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	31	SF	$120	**$3,696**
115647	186.5 to 192.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,072**
115648	192.9 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
115649	201.8 to 211.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	39	SF	$120	**$4,704**
115636	220.7 to 224.2 feet	**Vertical Change**	.38"	4 ft	14	LF	$75	**$1,050**
115660	223.8 to 225.1 feet		5.0-6.0%	4 ft	5			
115658	227.5 to 241.3 feet	Key Note Segment		4 ft	55			
115650	241.7 to 245.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311410	POPOLI WAY	ASHLAN WAY	GABRIEL WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115651	248.6 to 251.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
115652	252.1 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
115659	253.4 to 267.1 feet	Key Note Segment		4 ft	55			
115653	269.1 to 270.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**

TOTAL COST FOR: E *side of* **POPOLI WAY** *Starting at:* **ASHLAN WAY** **$50,918.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311354	POPOLI WAY	GABRIEL WAY	1500 POPOLI WAY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115518	1.2 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
115519	14.3 to 16.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
115521	17.2 to 30.4 feet	Key Note Segment		5 ft	66			
115517	25.1 to 26.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
115520	30.4 to 55.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	126	SF	$40	**$5,040**

TOTAL COST FOR: W *side of* **POPOLI WAY** *Starting at:* **GABRIEL WAY** **$11,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131516	PRINCETON AVE	HARVARD AVE	WILLIAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98988	0.0 to 11.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	56	SF	$120	$6,720
98989	13.9 to 24.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	$6,420
98990	29.1 to 30.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
99029	32.0 to 46.2 feet	Key Note Segment		5 ft	71			
98991	47.5 to 49.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
98992	51.8 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
99030	56.4 to 70.2 feet	Key Note Segment		5 ft	69			
98964	57.1 to 58.1 feet	Vertical Change	.33"	5 ft	5	REF		
98965	71.0 to 72.0 feet	Vertical Change	-.51"	5 ft	5	REF		
98993	71.4 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
98994	84.9 to 87.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
98995	90.2 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
98996	96.3 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
98997	103.7 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
98998	107.5 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	$15,540
98966	111.9 to 112.9 feet	Vertical Change	.33"	5 ft	5	REF		
98967	121.2 to 122.2 feet	Vertical Change	-.43"	5 ft	5	REF		
98968	131.8 to 132.8 feet	Vertical Change	-.28"	5 ft	5	REF		
99031	133.7 to 148.6 feet	Key Note Segment		5 ft	75			
98999	148.6 to 156.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	$1,640
99000	158.3 to 163.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
99032	163.9 to 177.7 feet	Key Note Segment		5 ft	69			
99001	177.9 to 181.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	18	SF	$40	$720
99002	182.7 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
98969	195.1 to 196.1 feet	Vertical Change	1.12"	5 ft	5	SF	$75	$375
98970	203.7 to 204.7 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
99003	209.7 to 224.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$8,940
99004	227.6 to 234.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131516	PRINCETON AVE	HARVARD AVE	WILLIAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99005	236.1 to 240.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
98971	241.4 to 242.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
99033	241.4 to 255.6 feet	Key Note Segment		5 ft	71			
99006	265.1 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
98972	267.9 to 268.9 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
99034	276.3 to 289.2 feet	Key Note Segment		5 ft	65			
98973	292.0 to 293.0 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
99007	302.8 to 305.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
98974	303.2 to 304.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
99008	307.6 to 317.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,940**
99009	318.3 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
98975	336.7 to 337.7 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
99010	344.5 to 348.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
99035	348.3 to 362.6 feet	Key Note Segment		5 ft	72			
98976	356.0 to 357.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
99011	362.6 to 375.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,600**
99012	377.9 to 379.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99013	381.8 to 382.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99036	383.2 to 397.1 feet	Key Note Segment		5 ft	70			
99014	401.8 to 406.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
99015	411.7 to 414.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
99016	422.3 to 454.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,440**
99017	458.6 to 459.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99037	461.7 to 476.4 feet	Key Note Segment		5 ft	74			
98977	462.5 to 463.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
98978	476.3 to 477.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
99018	478.0 to 482.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
99019	482.3 to 484.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131516	PRINCETON AVE	HARVARD AVE	WILLIAMS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98979	486.6 to 487.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
99038	490.4 to 504.7 feet	Key Note Segment		5 ft	72			
98980	500.7 to 501.7 feet	Vertical Change	-.26"	5 ft	5	REF		
99020	505.0 to 517.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	61	SF	$40	$2,440
99021	520.4 to 543.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	$13,740
98981	534.0 to 535.0 feet	Vertical Change	-.27"	5 ft	5	REF		
98982	542.7 to 543.7 feet	Vertical Change	.26"	5 ft	5	REF		
99022	548.0 to 550.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
99023	559.4 to 563.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
98983	563.7 to 564.7 feet	Vertical Change	.57"	5 ft	5	REF		
99039	563.8 to 577.6 feet	Key Note Segment		5 ft	69			
99024	578.2 to 592.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	73	SF	$40	$2,920
98984	594.4 to 595.4 feet	Vertical Change	.4"	5 ft	5	REF		
99025	594.7 to 596.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
99040	596.1 to 610.0 feet	Key Note Segment		5 ft	70			
98985	608.3 to 609.3 feet	Vertical Change	.33"	5 ft	5	REF		
99026	611.3 to 612.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
99027	616.0 to 619.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
99028	622.8 to 633.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
98987	639.1 to 640.1 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375

TOTAL COST FOR: N *side of* **PRINCETON AVE** *Starting at:* **HARVARD AVE** **$151,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2201131503	PRINCETON AVE	WILLIAMS AVE	WILLIAMS AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98795	1.9 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
98796	13.1 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
98797	23.2 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
98830	29.3 to 43.8 feet	Key Note Segment		5 ft	73			
98798	43.8 to 66.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	112	SF	$40	**$4,480**
98780	65.8 to 66.8 feet	Vertical Change	.71"	5 ft	5	REF		
98799	66.9 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
98800	72.0 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
98831	81.4 to 96.8 feet	Key Note Segment		5 ft	77			
98801	96.8 to 105.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	43	SF	$40	**$1,700**
98781	101.4 to 102.4 feet	Vertical Change	-.31"	5 ft	5	REF		
98802	105.3 to 108.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
98832	109.1 to 122.4 feet	Key Note Segment		5 ft	67			
98803	122.4 to 140.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	90	SF	$40	**$3,580**
98782	122.8 to 123.8 feet	Vertical Change	.39"	5 ft	5	REF		
98804	145.5 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98805	151.6 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
98783	157.2 to 158.2 feet	Vertical Change	.74"	5 ft	5	SF	$75	**$375**
98806	159.2 to 160.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
98807	167.5 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
98784	169.6 to 170.6 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**
98808	172.4 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
98809	186.5 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
98810	197.4 to 201.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
98833	201.5 to 217.4 feet	Key Note Segment		5 ft	80			
98811	217.4 to 218.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
98812	228.8 to 236.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
98785	232.2 to 233.2 feet	Vertical Change	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2201131503	PRINCETON AVE	WILLIAMS AVE	WILLIAMS AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98813	241.1 to 245.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
98814	245.3 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
98834	249.3 to 264.8 feet	Key Note Segment		5 ft	78			
98786	262.3 to 263.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
98815	264.9 to 266.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
98787	265.7 to 266.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
98816	288.5 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
98817	299.2 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
98788	299.7 to 300.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
98818	305.3 to 320.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
98789	318.8 to 319.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
98819	320.5 to 326.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
98820	326.5 to 334.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
98835	334.4 to 348.2 feet	Key Note Segment		5 ft	69			
98790	335.3 to 336.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
98821	348.7 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
98791	354.4 to 355.4 feet	**Vertical Change**	1.15"	5 ft	5	REF		
98836	362.0 to 376.0 feet	Key Note Segment		5 ft	70			
98792	363.1 to 364.1 feet	**Vertical Change**	-.53"	5 ft	5	REF		
98793	376.8 to 377.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
98822	376.9 to 379.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
98823	380.6 to 389.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
98824	393.6 to 405.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
98825	411.3 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
98837	418.8 to 432.7 feet	Key Note Segment		5 ft	70			
98826	432.7 to 436.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
98827	436.3 to 440.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98828	445.8 to 447.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2201131503	PRINCETON AVE	WILLIAMS AVE	WILLIAMS AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98794	446.4 to 447.4 feet	Vertical Change	.29"	5 ft	5	REF		
98829	450.1 to 461.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**

TOTAL COST FOR: N/W/S *side of* **PRINCETON AVE** *Starting at:* **WILLIAMS AVE** **$101,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131511	PRINCETON AVE	WILLIAMS AVE	HARVARD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98908	8.7 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
98952	21.4 to 35.3 feet	Key Note Segment		5 ft	69			
98909	36.1 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
98910	48.2 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
98953	54.5 to 67.8 feet	Key Note Segment		5 ft	67			
98911	68.3 to 78.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	**$2,000**
98881	68.8 to 69.8 feet	Vertical Change	.45"	5 ft	5	REF		
98912	78.8 to 83.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
98882	81.3 to 85.8 feet	Vertical Change	.26"	5 ft	23	REF		
98913	86.3 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
98883	86.9 to 87.9 feet	Vertical Change	-.46"	5 ft	5	REF		
98884	93.0 to 94.0 feet	Vertical Change	.5"	5 ft	5	REF		
98885	97.0 to 98.0 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
98886	101.0 to 102.0 feet	Vertical Change	.3"	5 ft	5	REF		
98914	101.6 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98915	107.7 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
98887	121.1 to 122.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
98916	126.9 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
98888	127.4 to 128.4 feet	Vertical Change	.4"	5 ft	5	REF		
98917	133.5 to 138.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
98918	141.8 to 161.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
98889	152.2 to 153.2 feet	Vertical Change	.27"	5 ft	5	REF		
98954	161.2 to 174.6 feet	Key Note Segment		5 ft	67			
98890	167.2 to 168.2 feet	Vertical Change	1.12"	5 ft	5	REF		
98919	175.5 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98920	179.5 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
98921	187.7 to 208.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
98922	212.3 to 238.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131511	PRINCETON AVE	WILLIAMS AVE	HARVARD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98891	225.5 to 226.5 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
98892	238.6 to 239.6 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
98955	239.3 to 253.3 feet	Key Note Segment		5 ft	70			
98893	249.6 to 250.6 feet	Vertical Change	-.3"	5 ft	5	REF		
98923	259.3 to 263.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
98924	265.7 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
98894	267.3 to 268.3 feet	Vertical Change	.33"	5 ft	5	REF		
98956	269.1 to 285.8 feet	Key Note Segment		5 ft	83			
98925	286.7 to 293.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
98926	293.9 to 309.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060
98895	306.7 to 307.7 feet	Vertical Change	.5"	5 ft	5	REF		
98927	310.7 to 318.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,680
98896	316.3 to 317.3 feet	Vertical Change	.28"	5 ft	5	REF		
98928	318.8 to 326.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
98929	326.6 to 339.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,620
98930	340.3 to 345.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
98957	345.5 to 360.3 feet	Key Note Segment		5 ft	74			
98931	360.3 to 380.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	101	SF	$40	$4,020
98898	376.9 to 377.9 feet	Vertical Change	-.26"	5 ft	5	REF		
98958	380.4 to 394.2 feet	Key Note Segment		5 ft	69			
98899	392.4 to 393.4 feet	Vertical Change	.47"	5 ft	5	REF		
98932	396.7 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
98933	411.3 to 426.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
98934	427.1 to 433.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
98935	439.6 to 442.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,500
98936	444.1 to 454.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
98959	454.6 to 468.3 feet	Key Note Segment		5 ft	69			
98937	468.3 to 478.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	$2,000

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131511	PRINCETON AVE	WILLIAMS AVE	HARVARD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98900	474.5 to 475.5 feet	Vertical Change	.58"	5 ft	5	REF		
98938	478.8 to 482.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,460
98901	484.6 to 485.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
98939	485.8 to 487.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
98960	488.3 to 502.3 feet	Key Note Segment		5 ft	70			
98940	504.7 to 517.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,560
98941	520.4 to 524.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,340
98942	526.3 to 539.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
98902	529.1 to 530.1 feet	Vertical Change	-.26"	5 ft	5	REF		
98943	539.9 to 544.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000
98944	544.9 to 546.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
98903	547.2 to 548.2 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
98945	550.3 to 555.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
98904	555.8 to 556.8 feet	Vertical Change	-.53"	5 ft	5	SF	$75	$375
98946	558.6 to 564.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
98961	566.8 to 580.7 feet	Key Note Segment		5 ft	70			
98947	588.1 to 589.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
98948	591.4 to 592.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
98962	592.7 to 613.6 feet	Key Note Segment		5 ft	104			
98905	601.5 to 602.5 feet	Vertical Change	.34"	5 ft	5	REF		
98949	615.3 to 616.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
98906	615.9 to 616.9 feet	Vertical Change	.37"	5 ft	5	REF		
98950	620.5 to 624.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
98907	628.4 to 629.4 feet	Vertical Change	.66"	5 ft	5	REF		
98951	629.1 to 633.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820

TOTAL COST FOR: S *side of* **PRINCETON AVE** *Starting at:* **WILLIAMS AVE** **$184,705.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131343	PRIVATE	PRIVATE	RIVERVIEW DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97902	7.8 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
97901	30.4 to 31.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
97903	33.3 to 48.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
97904	51.3 to 56.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
97905	53.3 to 55.3 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: E *side of* **PRIVATE** *Starting at:* **PRIVATE** **$26,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201601	QUADY LN	534 QUADY LN	GOOSECROSS DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77726	0.2 to 21.3 feet	Key Note Segment		5 ft	106			
77713	21.6 to 26.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
77714	26.5 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77715	34.6 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
77716	39.7 to 46.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
77717	49.3 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
77718	70.9 to 77.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
77719	77.3 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
77727	79.0 to 101.2 feet	Key Note Segment		5 ft	111			
77720	102.1 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
77711	104.3 to 105.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
77728	106.0 to 127.0 feet	Key Note Segment		5 ft	105			
77721	127.5 to 133.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
77722	133.3 to 136.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
77723	136.5 to 151.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,060**
77712	143.0 to 144.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
77724	152.2 to 161.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
77725	164.3 to 170.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**

TOTAL COST FOR: S *side of* **QUADY LN** *Starting at:* **534 QUADY LN** **$50,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201559	QUADY LN	COSENTINO DR	574 QUADY LN	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77669	0.0 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
77657	3.9 to 4.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
77670	5.2 to 6.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
77671	7.7 to 12.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
77672	12.2 to 17.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
77673	17.3 to 20.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
77658	19.4 to 20.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
77674	21.3 to 32.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,900**
77675	34.6 to 36.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
77702	36.4 to 58.3 feet	Key Note Segment		5 ft	110			
77676	59.1 to 60.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
77677	63.3 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
77678	68.4 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
77679	71.4 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
77680	77.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
77659	80.5 to 81.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
77703	89.3 to 108.2 feet	Key Note Segment		5 ft	95			
77681	108.2 to 109.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
77682	111.8 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
77704	114.7 to 136.0 feet	Key Note Segment		5 ft	107			
77661	124.9 to 125.9 feet	**Vertical Change**	.65"	5 ft	5	REF		
77683	138.9 to 148.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
77684	151.2 to 156.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
77685	156.8 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
77686	169.7 to 196.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,780**
77705	196.0 to 217.3 feet	Key Note Segment		5 ft	107			
77662	210.1 to 211.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
77687	220.3 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201559	QUADY LN	COSENTINO DR	574 QUADY LN	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77706	221.7 to 242.6 feet	Key Note Segment		5 ft	105			
77688	244.9 to 247.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
77689	247.9 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
77690	257.3 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
77691	266.6 to 270.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
77692	270.5 to 286.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,540**
77693	288.6 to 309.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
77707	310.3 to 331.4 feet	Key Note Segment		5 ft	106			
77664	322.6 to 323.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77694	333.0 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
77708	335.3 to 358.0 feet	Key Note Segment		5 ft	114			
77695	361.3 to 373.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
77696	373.8 to 382.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
77666	381.9 to 382.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
77697	382.9 to 384.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77698	391.4 to 405.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
77667	392.0 to 393.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
77699	406.0 to 414.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
77709	414.2 to 436.1 feet	Key Note Segment		5 ft	110			
77700	437.3 to 440.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
77668	440.8 to 441.8 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
77710	440.9 to 463.0 feet	Key Note Segment		5 ft	111			
77701	464.3 to 467.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: S *side of* **QUADY LN** *Starting at:* **COSENTINO DR** **$126,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201429	QUADY LN	GOOSECROSS DR	OAKRIDGE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76818	0.1 to 21.8 feet	Key Note Segment		5 ft	109			
76789	7.9 to 8.9 feet	Vertical Change	.73"	5 ft	5	REF		
76797	30.8 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
76798	47.2 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
76790	52.4 to 53.4 feet	Vertical Change	.55"	5 ft	5	REF		
76791	64.4 to 65.4 feet	Vertical Change	.73"	5 ft	5	REF		
76819	67.6 to 86.3 feet	Key Note Segment		5 ft	94			
76792	81.6 to 82.6 feet	Vertical Change	.3"	5 ft	5	REF		
76799	86.3 to 93.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	34	SF	$40	**$1,360**
76800	95.5 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
76801	103.0 to 104.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
76802	105.3 to 108.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76793	110.8 to 111.8 feet	Vertical Change	-.39"	5 ft	5	LF	$75	**$375**
76820	118.2 to 140.8 feet	Key Note Segment		5 ft	113			
76803	140.8 to 141.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$220**
76804	141.9 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
76821	145.9 to 168.3 feet	Key Note Segment		5 ft	112			
76805	181.1 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
76794	181.5 to 182.5 feet	Vertical Change	.3"	5 ft	5	REF		
76806	188.8 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
76807	209.6 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
76822	224.3 to 245.8 feet	Key Note Segment		5 ft	108			
76823	251.0 to 271.8 feet	Key Note Segment		5 ft	104			
76808	272.4 to 273.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
76809	273.4 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
76810	285.9 to 297.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
76811	297.4 to 310.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
76812	314.1 to 326.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201429	QUADY LN	GOOSECROSS DR	OAKRIDGE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76824	328.6 to 349.5 feet	Key Note Segment		5 ft	105			
76813	351.8 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
76825	354.3 to 376.9 feet	Key Note Segment		5 ft	113			
76814	377.3 to 379.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
76815	386.3 to 394.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
76795	393.5 to 394.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
76816	394.8 to 395.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
76817	401.1 to 402.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
76796	401.3 to 402.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **QUADY LN** *Starting at:* **GOOSECROSS DR** **$78,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201436	QUADY LN	OAKRIDGE DR	COSENTINO DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76862	0.8 to 21.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
76863	22.0 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
76864	25.8 to 27.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
76865	27.6 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
76885	30.0 to 51.8 feet	Key Note Segment		5 ft	109			
76847	47.5 to 48.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
76848	52.5 to 53.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
76866	53.0 to 56.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
76886	56.5 to 78.5 feet	Key Note Segment		5 ft	110			
76849	79.8 to 80.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
76867	80.5 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
76868	89.6 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
76869	92.9 to 94.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
76850	95.1 to 96.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
76870	99.8 to 133.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	167	SF	$120	**$19,980**
76851	100.0 to 101.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
76852	111.1 to 112.1 feet	**Vertical Change**	.44"	5 ft	5	REF		
76853	128.5 to 129.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
76871	135.4 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
76887	136.9 to 158.3 feet	Key Note Segment		5 ft	107			
76854	146.8 to 147.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
76872	160.4 to 162.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
76888	162.4 to 182.5 feet	Key Note Segment		5 ft	101			
76873	182.8 to 187.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
76855	188.2 to 189.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
76874	189.0 to 199.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
76875	202.3 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,900**
76856	206.9 to 207.9 feet	**Vertical Change**	.59"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201436	QUADY LN	OAKRIDGE DR	COSENTINO DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76857	232.7 to 233.7 feet	Vertical Change	.26"	5 ft	5	REF		
76889	241.0 to 262.6 feet	Key Note Segment		5 ft	108			
76876	264.9 to 266.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
76890	266.0 to 286.9 feet	Key Note Segment		5 ft	104			
76877	288.9 to 294.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
76858	292.7 to 293.7 feet	Vertical Change	-.42"	5 ft	5	REF		
76878	295.7 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
76859	298.7 to 299.7 feet	Vertical Change	.37"	5 ft	5	REF		
76860	306.6 to 307.6 feet	Vertical Change	.27"	5 ft	5	REF		
76879	306.8 to 313.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
76880	315.7 to 319.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
76881	322.3 to 324.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
76882	324.9 to 326.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
76883	332.2 to 341.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
76861	333.1 to 334.1 feet	Vertical Change	.36"	5 ft	5	REF		
76884	342.5 to 351.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
76891	351.8 to 374.9 feet	Key Note Segment		5 ft	116			

TOTAL COST FOR: N *side of* **QUADY LN** *Starting at:* **OAKRIDGE DR** **$108,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201241233	R ST	HOWARD RD	PINE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107158	0.0 to 17.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
107174	17.3 to 32.7 feet	Key Note Segment		5 ft	77			
107155	17.6 to 18.6 feet	**Vertical Change**	-.44"	5 ft	5	REF		
107159	33.3 to 37.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$860**
107160	38.7 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
107175	50.8 to 81.4 feet	Key Note Segment		5 ft	153			
107161	87.5 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
107162	91.8 to 111.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	99	SF	$120	**$11,820**
107163	111.9 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
107164	128.6 to 130.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
107165	132.8 to 151.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
107166	153.3 to 178.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,820**
107156	154.3 to 155.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
107157	157.7 to 158.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
107167	178.0 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
107168	182.3 to 184.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
107169	184.5 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
107176	186.8 to 207.8 feet	Key Note Segment		5 ft	105			
107170	217.5 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
107171	223.8 to 264.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	205	SF	$120	**$24,540**
107172	271.0 to 293.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,260**
107177	273.1 to 274.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
107173	293.1 to 294.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: NE *side of* **R ST** *Starting at:* **HOWARD RD** **$113,039.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190935	RANCHO MIRAGE RD	DEL LAGO WAY	LA QUINTA WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72537	3.5 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,074**
72538	18.7 to 23.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
72554	24.1 to 45.0 feet	Key Note Segment		5 ft	94			
72539	49.9 to 51.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
72555	51.6 to 72.5 feet	Key Note Segment		5 ft	94			
72540	72.7 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,262**
72541	95.6 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
72542	102.0 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,052**
72543	115.3 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,210**
72556	126.8 to 147.3 feet	Key Note Segment		5 ft	92			
72544	148.1 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
72545	153.0 to 154.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
72557	155.3 to 175.7 feet	Key Note Segment		5 ft	92			
72546	178.4 to 188.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,346**
72547	190.9 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,050**
72548	205.3 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
72533	206.1 to 207.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
72549	213.2 to 224.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,994**
72550	224.6 to 227.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
72551	229.3 to 234.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,754**
72558	235.4 to 254.9 feet	Key Note Segment		5 ft	88			
72534	245.1 to 246.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
72552	256.3 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72559	259.3 to 285.5 feet	Key Note Segment		5 ft	118			
72535	267.7 to 268.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
72536	279.9 to 280.9 feet	**Vertical Change**	-.37"	5 ft	5	REF		
72553	286.2 to 287.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$216**
72560	298.4 to 299.8 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190935	RANCHO MIRAGE RD	DEL LAGO WAY	LA QUINTA WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**W**	*side of* **RANCHO MIRAGE RD**	*Starting at:* **DEL LAGO WAY**					**$54,594.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191131	RANCHO MIRAGE RD	LA QUINTA WAY	PASEO DEL MAR PRKW	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73575	0.0 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,862**
73576	5.3 to 29.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,068**
73569	23.6 to 24.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
73577	31.8 to 37.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,916**
73578	37.8 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
73570	38.5 to 39.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
73571	45.7 to 46.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
73579	45.7 to 57.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,210**
73580	59.5 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,742**
73572	75.7 to 76.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
73573	87.5 to 88.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
73581	87.6 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
73574	89.2 to 90.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
73582	93.1 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,802**
73583	116.8 to 119.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,404**
73584	120.0 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
73585	130.3 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,242**
73586	138.7 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
73587	139.7 to 140.8 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **RANCHO MIRAGE RD** *Starting at:* **LA QUINTA WAY** **$58,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191138	RANCHO MIRAGE RD	LINDA MESA DR	LOMA LINDA LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73613	0.2 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
73614	4.2 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
73615	13.8 to 16.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,404**
73616	19.6 to 22.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,350**
73617	22.3 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
73618	35.8 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
73603	36.1 to 37.1 feet	**Vertical Change**	-.42"	5 ft	5	REF		
73619	42.8 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,776**
73620	59.3 to 63.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
73621	64.9 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,022**
73622	76.3 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
73655	96.3 to 116.2 feet	Key Note Segment		5 ft	90			
73604	116.0 to 117.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
73623	119.3 to 124.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,538**
73656	124.0 to 143.8 feet	Key Note Segment		5 ft	89			
73605	134.1 to 135.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
73624	147.3 to 154.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,050**
73625	157.3 to 168.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,940**
73626	175.3 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
73627	186.1 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,968**
73628	196.8 to 200.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,890**
73657	201.3 to 221.0 feet	Key Note Segment		5 ft	89			
73629	221.8 to 223.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
73630	223.5 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,052**
73658	228.1 to 247.8 feet	Key Note Segment		5 ft	89			
73631	249.0 to 250.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
73632	250.2 to 258.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
73633	260.3 to 267.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191138	RANCHO MIRAGE RD	LINDA MESA DR	LOMA LINDA LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73634	267.4 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,808**
73606	273.9 to 274.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$338**
73635	275.3 to 276.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$594**
73607	277.7 to 278.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
73636	277.8 to 281.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,782**
73637	285.5 to 289.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,268**
73638	294.3 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,186**
73639	302.4 to 303.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$540**
73659	303.4 to 323.8 feet	Key Note Segment		5 ft	92			
73640	324.7 to 331.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,402**
73660	331.0 to 351.2 feet	Key Note Segment		5 ft	91			
73641	354.5 to 361.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,564**
73642	361.5 to 391.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,362**
73608	384.1 to 385.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
73643	394.9 to 396.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$972**
73644	396.7 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,264**
73609	397.2 to 398.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
73661	408.9 to 428.2 feet	Key Note Segment		5 ft	87			
73645	429.8 to 433.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
73662	433.8 to 453.9 feet	Key Note Segment		5 ft	90			
73646	453.9 to 465.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,160**
73647	467.0 to 478.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,156**
73648	480.3 to 493.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,074**
73649	493.8 to 509.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,694**
73663	511.7 to 530.6 feet	Key Note Segment		5 ft	85			
73650	532.2 to 538.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,564**
73664	539.1 to 558.2 feet	Key Note Segment		5 ft	86			
73651	560.0 to 568.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,482**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191138	RANCHO MIRAGE RD	LINDA MESA DR	LOMA LINDA LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73652	574.3 to 614.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	182	SF	$120	**$21,870**
73665	614.9 to 634.3 feet	Key Note Segment		5 ft	87			
73653	635.0 to 642.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,104**
73666	643.0 to 661.7 feet	Key Note Segment		5 ft	84			
73610	644.1 to 645.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
73611	661.5 to 662.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
73654	661.7 to 683.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	98	SF	$40	**$3,924**
73612	671.4 to 672.4 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **RANCHO MIRAGE RD** *Starting at:* **LINDA MESA DR** **$182,677.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191206	RANCHO MIRAGE RD	LOMA LINDA LN	ORTEGA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73862	0.0 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,808**
73885	5.8 to 23.9 feet	Key Note Segment		5 ft	81			
73863	24.3 to 31.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	33	SF	$40	**$1,314**
73856	28.7 to 29.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
73886	31.8 to 50.6 feet	Key Note Segment		5 ft	85			
73857	35.3 to 36.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
73864	50.8 to 58.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,422**
73865	83.3 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,098**
73858	89.8 to 90.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
73887	102.0 to 122.1 feet	Key Note Segment		5 ft	90			
73866	122.3 to 125.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$504**
73867	127.4 to 129.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,350**
73860	127.8 to 128.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
73888	130.3 to 149.3 feet	Key Note Segment		5 ft	86			
73868	150.5 to 155.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,916**
73869	158.8 to 169.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,724**
73870	170.2 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$972**
73871	178.5 to 190.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,210**
73872	192.8 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
73873	196.8 to 199.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,566**
73874	203.1 to 205.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,350**
73889	205.6 to 222.3 feet	Key Note Segment		5 ft	75			
73875	222.3 to 231.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,638**
73890	233.7 to 252.2 feet	Key Note Segment		5 ft	83			
73876	254.4 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
73877	257.9 to 259.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
73878	265.7 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
73879	270.6 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,106**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191206	RANCHO MIRAGE RD	LOMA LINDA LN	ORTEGA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73880	274.5 to 280.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,970**
73881	284.0 to 292.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,482**
73882	303.9 to 310.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,564**
73891	310.5 to 329.4 feet	Key Note Segment		5 ft	85			
73883	330.8 to 336.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
73892	336.4 to 356.8 feet	Key Note Segment		5 ft	92			
73884	360.5 to 380.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,962**

TOTAL COST FOR: W *side of* **RANCHO MIRAGE RD** *Starting at:* **LOMA LINDA LN** **$70,056.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191213	RANCHO MIRAGE RD	ORTEGA DR	DEL LAGO WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73917	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$702**
73918	1.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
73905	7.0 to 8.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
73919	7.7 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,404**
73920	14.6 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
73921	16.7 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,724**
73939	27.3 to 47.1 feet	Key Note Segment		5 ft	89			
73906	28.3 to 29.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
73922	48.2 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,186**
73940	54.3 to 73.8 feet	Key Note Segment		5 ft	88			
73907	54.9 to 55.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
73908	63.8 to 64.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
73923	75.8 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,970**
73924	81.3 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,836**
73925	87.7 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,932**
73909	88.2 to 89.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
73910	99.6 to 100.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
73926	117.3 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,606**
73941	146.2 to 165.7 feet	Key Note Segment		5 ft	88			
73927	165.7 to 172.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,278**
73942	173.2 to 193.3 feet	Key Note Segment		5 ft	90			
73911	174.2 to 175.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
73928	194.1 to 205.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,156**
73929	206.8 to 214.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,888**
73930	214.6 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
73931	219.3 to 237.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,558**
73932	252.6 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
73933	256.3 to 264.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,644**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191213	RANCHO MIRAGE RD	ORTEGA DR	DEL LAGO WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73943	264.9 to 284.8 feet	Key Note Segment		5 ft	90			
73912	266.2 to 267.2 feet	Vertical Change	-.28"	5 ft	5	REF		
73913	275.3 to 276.3 feet	Vertical Change	-.26"	5 ft	5	REF		
73934	285.5 to 291.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,132**
73944	291.3 to 311.5 feet	Key Note Segment		5 ft	91			
73935	311.9 to 321.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	42	SF	$40	**$1,692**
73936	321.3 to 340.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,584**
73937	344.8 to 350.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,808**
73945	350.0 to 370.7 feet	Key Note Segment		5 ft	93			
73914	360.7 to 361.7 feet	Vertical Change	.28"	5 ft	5	REF		
73915	369.9 to 370.9 feet	Vertical Change	.39"	5 ft	5	REF		
73938	373.4 to 395.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
73946	395.1 to 396.8 feet		5.0-6.0%	5 ft	8			
73916	397.9 to 398.9 feet	Vertical Change	.35"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: W *side of* **RANCHO MIRAGE RD** *Starting at:* **ORTEGA DR** **$106,609.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191133	RANCHO MIRAGE RD	PASEO DEL MAR PRKW	LINDA MESA DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73588	0.4 to 1.4 feet	Vertical Change	.31"	5 ft	5	REF		
73591	1.1 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,292**
73592	14.8 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,916**
73593	28.1 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$918**
73594	35.8 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
73589	43.5 to 44.5 feet	Vertical Change	1.83"	5 ft	5	REF		
73595	58.3 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	214	SF	$120	**$25,650**
73590	87.2 to 88.2 feet	Vertical Change	.29"	5 ft	5	REF		
73596	109.3 to 112.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,944**
73597	115.3 to 119.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,106**
73598	122.0 to 124.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,296**
73599	127.8 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
73600	134.5 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
73601	138.6 to 140.9 feet		5.0-6.0%	5 ft	10			
73602	138.6 to 140.9 feet	Running Slope	5.0-6.0%	5 ft	10	SF	$120	**$1,242**

TOTAL COST FOR: E *side of* **RANCHO MIRAGE RD** *Starting at:* **PASEO DEL MAR PRKW** **$59,562.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191046	RANCHO SANTA FE DR	LOMA LINDA LN	VERDE MESA WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73062	2.8 to 13.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
73094	14.6 to 34.8 feet	Key Note Segment		5 ft	101			
73053	34.5 to 35.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
73063	35.8 to 40.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
73095	42.5 to 62.2 feet	Key Note Segment		5 ft	99			
73054	52.5 to 53.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
73064	63.7 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
73065	67.1 to 71.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
73066	72.8 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
73067	98.1 to 103.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
73068	105.3 to 106.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
73055	107.7 to 108.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
73069	109.2 to 113.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
73070	115.7 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
73096	119.3 to 138.3 feet	Key Note Segment		5 ft	95			
73071	138.3 to 146.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,700**
73097	146.8 to 165.9 feet	Key Note Segment		5 ft	95			
73072	168.9 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
73073	186.2 to 187.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
73074	190.3 to 193.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
73075	195.8 to 198.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
73056	198.9 to 199.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
73076	202.5 to 216.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
73077	219.1 to 223.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
73098	223.0 to 242.0 feet	Key Note Segment		5 ft	95			
73078	243.7 to 248.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
73099	248.5 to 268.7 feet	Key Note Segment		5 ft	101			
73057	259.3 to 260.3 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191046	RANCHO SANTA FE DR	LOMA LINDA LN	VERDE MESA WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73079	269.3 to 287.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	90	SF	$40	$3,620
73080	289.8 to 291.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
73081	295.7 to 302.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,900
73058	304.0 to 305.0 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
73082	308.3 to 314.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,600
73083	314.3 to 316.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
73059	315.1 to 316.1 feet	Vertical Change	.32"	5 ft	5	REF		
73084	320.2 to 321.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
73085	322.7 to 324.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
73100	325.9 to 346.6 feet	Key Note Segment		5 ft	104			
73060	336.1 to 337.1 feet	Vertical Change	.34"	5 ft	5	REF		
73086	346.9 to 352.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	$1,120
73101	352.7 to 373.5 feet	Key Note Segment		5 ft	104			
73061	372.4 to 373.4 feet	Vertical Change	-.36"	5 ft	5	REF		
73087	375.5 to 402.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	$16,440
73102	404.6 to 423.8 feet	Key Note Segment		5 ft	96			
73088	424.6 to 435.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,720
73089	440.6 to 446.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,480
73090	446.4 to 455.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
73103	463.2 to 481.6 feet	Key Note Segment		5 ft	92			
73091	485.8 to 493.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
73092	495.2 to 497.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
73093	497.6 to 502.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
73104	501.3 to 502.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **RANCHO SANTA FE DR** *Starting at:* **LOMA LINDA LN** **$119,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191042	RANCHO SANTA FE DR	VERDE MESA WAY	LOMA LINDA LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73015	0.0 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
73001	1.3 to 2.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
73016	4.2 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
73017	11.2 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
73044	17.4 to 36.9 feet	Key Note Segment		5 ft	98			
73003	27.2 to 28.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
73018	39.9 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
73004	48.6 to 49.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
73045	71.5 to 91.6 feet	Key Note Segment		5 ft	101			
73019	92.9 to 97.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
73046	97.8 to 118.9 feet	Key Note Segment		5 ft	106			
73005	99.5 to 100.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
73020	119.3 to 126.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	34	SF	$40	**$1,340**
73021	127.8 to 134.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
73022	137.3 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
73023	147.4 to 156.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
73024	157.1 to 162.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
73025	165.6 to 179.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
73026	180.9 to 182.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
73047	182.1 to 202.4 feet	Key Note Segment		5 ft	102			
73006	201.6 to 202.6 feet	**Vertical Change**	-.38"	5 ft	5	REF		
73027	202.6 to 208.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
73048	209.6 to 229.7 feet	Key Note Segment		5 ft	101			
73028	230.8 to 240.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
73029	241.3 to 255.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
73030	255.1 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
73007	266.7 to 267.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
73031	267.6 to 269.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191042	RANCHO SANTA FE DR	VERDE MESA WAY	LOMA LINDA LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73032	270.6 to 279.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
73033	280.7 to 291.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
73049	291.5 to 312.0 feet	Key Note Segment		5 ft	103			
73009	312.0 to 313.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
73034	313.0 to 318.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73050	318.8 to 338.1 feet	Key Note Segment		5 ft	97			
73010	338.8 to 339.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
73035	341.8 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
73036	345.3 to 349.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
73037	349.8 to 360.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
73011	352.7 to 353.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
73012	364.5 to 365.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
73038	367.8 to 377.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
73039	378.5 to 393.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
73040	396.6 to 401.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
73051	401.4 to 421.6 feet	Key Note Segment		5 ft	101			
73041	423.3 to 429.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73052	429.4 to 449.8 feet	Key Note Segment		5 ft	102			
73013	430.5 to 431.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
73042	450.1 to 452.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$420**
73043	455.8 to 470.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**

TOTAL COST FOR: E *side of* **RANCHO SANTA FE DR** *Starting at:* **VERDE MESA WAY** **$137,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121140	RD 28	14143 RD 28	14143 RD 28	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60537	0.0 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	48	SF	$120	**$5,808**
60535	0.4 to 1.4 feet	**Vertical Change**	.35"	6 ft	6	REF		
60538	9.5 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	75	SF	$120	**$9,042**
60536	14.2 to 15.2 feet	**Vertical Change**	.42"	6 ft	6	REF		
60539	23.2 to 28.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	30	SF	$120	**$3,630**
60540	28.7 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,214**
60541	37.3 to 48.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	59	SF	$120	**$7,128**
60542	48.1 to 76.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	158	SF	$120	**$19,008**
60543	82.0 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	29	SF	$120	**$3,498**
60544	91.8 to 99.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	42	SF	$120	**$5,016**
60545	99.4 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	138	SF	$120	**$16,500**
60546	128.3 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,650**

TOTAL COST FOR: E *side of* **RD 28** *Starting at:* **14143 RD 28** **$76,494.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108121142	RD 28	145 KNOX AVE	TRAIL WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60548	1.4 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
60549	7.8 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
60550	36.4 to 64.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,620**
60547	51.2 to 52.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
60551	66.8 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
60552	98.4 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
60553	123.5 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**

TOTAL COST FOR: E *side of* **RD 28** *Starting at:* **145 KNOX AVE** **$54,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121131	RD 28	A ST	TRAIL WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60440	3.4 to 4.4 feet	Vertical Change	-.37"	5 ft	5	REF		
60445	4.1 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
60446	17.5 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
60441	23.8 to 24.8 feet	Vertical Change	-.3"	5 ft	5	REF		
60447	50.7 to 53.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
60448	58.9 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
60449	62.8 to 75.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	63	SF	$120	**$7,500**
60450	75.3 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
60451	78.3 to 80.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
60452	80.0 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
60453	102.0 to 177.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	377	SF	$120	**$45,180**
60442	139.7 to 140.7 feet	Vertical Change	-.35"	5 ft	5	REF		
60454	179.7 to 183.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
60455	183.3 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
60456	190.8 to 204.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
60457	207.4 to 213.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
60458	214.1 to 217.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
60443	214.7 to 215.7 feet	Vertical Change	.63"	5 ft	5	REF		
60459	221.0 to 228.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
60460	228.5 to 241.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
60461	244.6 to 263.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
60462	266.0 to 284.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**
60463	284.8 to 300.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
60464	303.3 to 307.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
60465	309.6 to 323.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,220**
60466	325.5 to 326.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
60467	326.7 to 329.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
60468	332.8 to 340.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	38	SF	$40	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121131	RD 28	A ST	TRAIL WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60469	344.9 to 351.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	32	SF	$40	**$1,280**
60444	357.0 to 358.0 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
60470	362.8 to 364.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
60471	372.2 to 389.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
60472	392.1 to 401.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
60473	401.8 to 411.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
60474	413.9 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
60475	423.8 to 432.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
60476	435.1 to 437.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
60477	455.8 to 459.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
60478	466.7 to 468.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
60479	472.7 to 475.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
60480	475.8 to 478.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
60481	481.1 to 482.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
60482	482.9 to 487.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
60483	489.3 to 517.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,860**
60484	517.8 to 521.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
60485	518.4 to 520.6 feet		7.0-8.0%	5 ft	11			
60486	518.4 to 520.6 feet	Running Slope	7.0-8.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: W *side of* **RD 28** *Starting at:* **A ST** **$237,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181538	RD 28	E ALMOND AVE	KNOX RD	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72431	15.4 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
72424	32.0 to 33.0 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
72432	46.7 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
72433	106.1 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
72434	119.4 to 122.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
72435	127.8 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
72436	143.3 to 168.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,060**
72437	169.3 to 182.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
72438	182.8 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
72439	206.9 to 211.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
72440	238.4 to 249.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
72441	256.8 to 258.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
72442	267.8 to 278.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
72443	281.7 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
72444	286.8 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
72445	304.8 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,380**
72425	336.3 to 337.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
72446	343.8 to 380.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
72447	383.4 to 388.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
72448	391.5 to 404.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
72426	398.2 to 399.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
72449	406.7 to 418.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
72450	421.5 to 422.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
72451	422.8 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72452	427.7 to 430.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72453	432.9 to 435.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
72454	440.8 to 442.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
72455	447.9 to 458.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181538	RD 28	E ALMOND AVE	KNOX RD	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72427	454.7 to 455.7 feet	Vertical Change	.49"	5 ft	5	REF		
72456	460.9 to 465.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
72457	467.8 to 484.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
72458	487.1 to 500.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
72459	501.4 to 523.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
72460	531.1 to 536.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
72461	540.4 to 541.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
72462	542.8 to 546.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
72463	552.5 to 554.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
72464	559.0 to 571.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
72465	576.6 to 588.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
72466	591.1 to 593.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
72467	596.6 to 603.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
72468	609.0 to 610.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
72469	610.8 to 612.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72470	615.0 to 618.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
72471	623.6 to 625.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
72472	626.6 to 647.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
72513	635.1 to 636.3 feet		5.0-6.0%	5 ft	6			
72473	648.6 to 661.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
72474	662.3 to 669.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
72475	673.7 to 683.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
72476	683.1 to 737.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	270	SF	$120	**$32,340**
72428	723.1 to 724.1 feet	Vertical Change	-.26"	5 ft	5	REF		
72477	740.3 to 741.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72478	743.7 to 769.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
72479	775.7 to 776.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72480	783.2 to 789.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181538	RD 28	E ALMOND AVE	KNOX RD	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72481	791.5 to 796.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
72482	797.2 to 801.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
72483	804.0 to 809.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
72484	810.1 to 823.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
72485	826.3 to 844.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
72486	846.5 to 853.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
72487	855.5 to 889.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
72488	894.8 to 925.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
72489	927.7 to 933.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
72490	934.3 to 938.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
72491	940.6 to 943.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72492	944.3 to 951.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
72493	951.3 to 968.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
72494	973.9 to 979.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
72495	980.3 to 984.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
72496	984.9 to 986.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
72497	990.1 to 1020.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
72498	1022.2 to 1035.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,740**
72499	1038.2 to 1039.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
72429	1042.3 to 1043.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
72500	1045.7 to 1073.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
72430	1057.4 to 1058.4 feet	**Vertical Change**	.52"	5 ft	5	REF		
72501	1079.8 to 1086.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
72502	1089.2 to 1091.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72503	1099.3 to 1109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
72504	1118.2 to 1121.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
72505	1121.3 to 1125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
72506	1125.3 to 1128.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181538	RD 28	E ALMOND AVE	KNOX RD	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72507	1139.3 to 1159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
72508	1161.9 to 1169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
72509	1176.5 to 1180.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
72510	1190.2 to 1191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72511	1201.3 to 1205.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
72512	1219.5 to 1225.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: W *side of* **RD 28** *Starting at:* **E ALMOND AVE** **$473,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110181414	RD 28	KNOX ST	13306 RD 28	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71794	0.2 to 3.6 feet	Vertical Change	.27"	5 ft	17	REF		
71799	0.6 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
71795	10.9 to 11.9 feet	Vertical Change	-.37"	5 ft	5	REF		
71800	11.6 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
71801	54.4 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
71802	63.9 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71803	77.1 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
71796	95.1 to 96.1 feet	Vertical Change	-.43"	5 ft	5	LF	$75	**$375**
71804	108.7 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
71797	121.0 to 122.0 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$375**
71805	144.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
71806	172.4 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
71798	187.9 to 188.9 feet	Vertical Change	-.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **RD 28** *Starting at:* **KNOX ST** **$37,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121136	RD 28	TRAIL WAY	OLIVE AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60534	0.1 to 1.1 feet		5.0-6.0%	5 ft	5			
60490	2.3 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
60491	9.2 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,260**
60492	41.3 to 43.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
60493	47.2 to 70.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,740**
60494	70.4 to 73.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
60495	75.8 to 82.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
60496	85.8 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
60497	100.0 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
60498	106.4 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
60499	111.3 to 129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
60487	127.9 to 128.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
60500	132.8 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
60501	136.0 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
60502	148.1 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
60503	159.9 to 166.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
60504	167.3 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
60505	172.0 to 177.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
60506	177.5 to 184.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,380**
60507	185.9 to 193.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
60508	195.3 to 207.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
60509	210.3 to 218.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
60510	219.9 to 233.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
60488	228.6 to 229.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
60511	241.1 to 256.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
60512	259.8 to 282.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,860**
60513	282.9 to 293.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
60514	293.4 to 308.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121136	RD 28	TRAIL WAY	OLIVE AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60515	308.5 to 319.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
60516	319.0 to 320.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
60517	323.5 to 325.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
60518	327.4 to 341.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
60519	341.6 to 343.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
60520	343.3 to 359.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	80	SF	$120	**$9,600**
60521	362.3 to 364.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
60522	366.4 to 379.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
60523	385.7 to 388.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
60524	388.2 to 390.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
60525	390.7 to 398.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
60526	398.8 to 400.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
60527	400.3 to 413.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,100**
60528	413.8 to 415.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
60529	416.9 to 419.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
60489	418.2 to 419.2 feet	**Vertical Change**	.8"	5 ft	5	REF		
60530	419.2 to 420.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
60531	420.4 to 434.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
60532	435.2 to 440.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
60533	440.8 to 448.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**

TOTAL COST FOR: W *side of* **RD 28** *Starting at:* **TRAIL WAY** **$225,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151640	REN WAY	3158 REN WAY	WESTBERRY BVD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84900	0.2 to 1.2 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
84917	1.9 to 6.3 feet	Cross Slope (PAR)	12.0-13.0%	5 ft	22	SF	$120	$2,640
84901	2.3 to 3.3 feet	Vertical Change	-.28"	5 ft	5	REF		
84918	8.0 to 11.8 feet	Cross Slope (PAR)	14.0-15.0%	5 ft	19	SF	$120	$2,280
84919	18.0 to 35.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	86	SF	$120	$10,380
84920	38.2 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
84921	40.3 to 47.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
84922	48.9 to 57.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,860
84923	58.1 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
84924	67.0 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
84925	74.1 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
84950	78.7 to 98.3 feet	Key Note Segment		5 ft	98			
84926	99.3 to 104.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,360
84902	101.5 to 102.5 feet	Vertical Change	.28"	5 ft	5	REF		
84951	105.6 to 125.3 feet	Key Note Segment		5 ft	99			
84903	115.7 to 116.7 feet	Vertical Change	.29"	5 ft	5	REF		
84927	128.1 to 153.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	$14,940
84928	154.3 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
84929	162.1 to 163.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
84930	167.8 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
84931	177.6 to 179.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
84952	184.1 to 204.3 feet	Key Note Segment		5 ft	101			
84932	205.6 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
84953	210.7 to 231.1 feet	Key Note Segment		5 ft	102			
84933	236.3 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
84934	246.8 to 259.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,500
84935	264.2 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	$8,100
84936	277.8 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151640	REN WAY	3158 REN WAY	WESTBERRY BVD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84954	291.3 to 309.8 feet	Key Note Segment		5 ft	93			
84904	298.6 to 299.6 feet	Vertical Change	1.35"	5 ft	5	REF		
84937	312.7 to 316.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
84955	316.3 to 336.1 feet	Key Note Segment		5 ft	99			
84905	322.0 to 323.0 feet	Vertical Change	3.03"	5 ft	5	REF		
84938	336.8 to 341.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
84939	342.8 to 351.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
84940	354.6 to 359.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
84941	359.3 to 388.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
84942	388.3 to 393.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
84943	393.9 to 395.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84956	395.8 to 416.2 feet	Key Note Segment		5 ft	102			
84906	396.6 to 397.6 feet	Vertical Change	.29"	5 ft	5	REF		
84907	400.8 to 401.8 feet	Vertical Change	-.35"	5 ft	5	REF		
84908	406.2 to 407.2 feet	Vertical Change	-.3"	5 ft	5	REF		
84944	416.6 to 421.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
84957	421.6 to 441.4 feet	Key Note Segment		5 ft	99			
84909	425.3 to 426.3 feet	Vertical Change	.35"	5 ft	5	REF		
84910	428.6 to 431.6 feet	Vertical Change	.27"	5 ft	15	REF		
84911	434.5 to 435.5 feet	Vertical Change	.28"	5 ft	5	REF		
84912	436.2 to 437.2 feet	Vertical Change	-.34"	5 ft	5	REF		
84913	438.1 to 439.1 feet	Vertical Change	.28"	5 ft	5	REF		
84945	441.4 to 442.4 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	5	SF	$40	**$200**
84946	442.4 to 445.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
84947	449.6 to 455.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
84914	454.3 to 455.3 feet	Vertical Change	3.52"	5 ft	5	REF		
84948	459.3 to 461.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
84915	463.6 to 464.6 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151640	REN WAY	3158 REN WAY	WESTBERRY BVD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84949	465.0 to 469.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
84958	467.5 to 470.1 feet		5.0-6.0%	5 ft	13			
84959	467.5 to 470.1 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
84916	469.0 to 470.0 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **REN WAY** *Starting at:* **3158 REN WAY** **$135,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151411	REN WAY	CREEK DR	TIMBERLINE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83047	0.9 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
83048	7.8 to 9.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
83049	10.4 to 11.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83050	22.3 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
83061	25.6 to 46.1 feet	Key Note Segment		5 ft	103			
83044	33.9 to 34.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
83051	49.8 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
83062	53.1 to 72.7 feet	Key Note Segment		5 ft	98			
83045	63.2 to 64.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
83052	73.0 to 75.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
83053	79.8 to 94.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
83054	97.3 to 103.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
83055	108.5 to 130.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
83056	133.4 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
83063	141.6 to 161.6 feet	Key Note Segment		5 ft	100			
83046	152.4 to 153.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
83057	162.5 to 165.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	14	SF	$40	**$560**
83064	167.6 to 187.2 feet	Key Note Segment		5 ft	98			
83058	188.4 to 197.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
83059	197.8 to 208.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
83060	212.7 to 214.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **CREEK DR** **$52,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151401	REN WAY	DOUBLE TREE WAY	CREEK DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82907	5.3 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
82908	14.1 to 38.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,580**
82909	41.1 to 42.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
82910	46.1 to 49.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
82911	49.5 to 51.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
82912	53.2 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
82913	59.8 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
82901	63.0 to 64.0 feet	**Vertical Change**	3.53"	5 ft	5	REF		
82914	70.8 to 82.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
82915	83.5 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
82916	92.8 to 99.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
82917	101.5 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82918	105.1 to 114.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
82919	117.8 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
82902	122.2 to 123.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
82920	123.0 to 140.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	89	SF	$120	**$10,680**
82903	125.3 to 126.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
82904	129.2 to 130.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
82905	131.9 to 132.9 feet	**Vertical Change**	.64"	5 ft	5	REF		
82923	139.9 to 141.2 feet		5.0-6.0%	5 ft	6			
82921	142.6 to 147.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
82922	147.8 to 159.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
82906	150.9 to 151.9 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **DOUBLE TREE WAY** **$75,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151636	REN WAY	KENT WAY	3414 REN WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84882	4.2 to 5.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
84884	6.1 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	$4,020
84885	13.9 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	$15,600
84886	40.3 to 41.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
84897	41.8 to 61.3 feet	Key Note Segment		5 ft	98			
84887	61.8 to 67.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,300
84898	67.6 to 88.1 feet	Key Note Segment		5 ft	103			
84888	88.1 to 90.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	14	SF	$40	$540
84889	90.8 to 96.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	$3,660
84890	98.1 to 102.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
84891	103.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
84892	107.7 to 114.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
84893	116.6 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,380
84883	117.3 to 118.3 feet	Vertical Change	.27"	5 ft	5	REF		
84894	124.4 to 129.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	$3,000
84895	129.4 to 146.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	$10,260
84899	146.5 to 166.6 feet	Key Note Segment		5 ft	101			
84896	168.1 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020

TOTAL COST FOR: S *side of* **REN WAY** *Starting at:* **KENT WAY** **$54,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151432	REN WAY	TIMBERLINE DR	WESTBERRY BVD	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83291	4.8 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
83292	13.6 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
83293	45.9 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
83294	59.1 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
83290	61.7 to 62.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
83295	74.2 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
83296	81.6 to 84.7 feet		6.0-7.0%	5 ft	16			

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **TIMBERLINE DR** **$20,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151321	REN WAY	TIMBERLINE DR	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82406	0.0 to 3.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
82476	3.6 to 24.3 feet	Key Note Segment		5 ft	104			
82477	26.7 to 48.4 feet	Key Note Segment		5 ft	109			
82375	47.3 to 48.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
82407	48.5 to 50.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
82408	53.1 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
82376	62.8 to 63.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
82409	65.0 to 67.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
82410	70.5 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
82411	76.8 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
82412	83.2 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
82377	88.0 to 89.0 feet	**Vertical Change**	3.66"	5 ft	5	SF	$75	**$375**
82413	89.2 to 90.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
82414	90.6 to 97.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
82478	98.3 to 118.5 feet	Key Note Segment		5 ft	101			
82415	119.8 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
82416	122.1 to 123.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
82479	124.6 to 144.4 feet	Key Note Segment		5 ft	99			
82378	134.9 to 135.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
82417	145.5 to 147.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82418	149.5 to 153.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
82419	155.8 to 164.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
82379	162.4 to 163.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
82420	169.9 to 177.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
82380	178.5 to 179.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
82421	179.1 to 193.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
82381	186.4 to 187.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
82382	188.6 to 189.6 feet	**Vertical Change**	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151321	REN WAY	TIMBERLINE DR	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82383	191.7 to 196.4 feet	Vertical Change	.49"	5 ft	24	REF		
82422	194.8 to 201.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	36	SF	$120	$4,260
82384	198.5 to 199.5 feet	Vertical Change	.26"	5 ft	5	REF		
82385	202.1 to 203.1 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
82480	203.7 to 223.6 feet	Key Note Segment		5 ft	100			
82386	204.1 to 205.1 feet	Vertical Change	-.65"	5 ft	5	REF		
82387	206.4 to 207.4 feet	Vertical Change	.29"	5 ft	5	REF		
82423	225.8 to 229.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,400
82481	229.8 to 250.5 feet	Key Note Segment		5 ft	104			
82388	239.7 to 240.7 feet	Vertical Change	-.56"	5 ft	5	REF		
82424	250.6 to 253.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
82425	254.4 to 263.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
82426	266.2 to 274.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	$4,920
82427	278.6 to 310.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	$18,900
82482	310.1 to 330.7 feet	Key Note Segment		5 ft	103			
82389	320.1 to 321.1 feet	Vertical Change	.29"	5 ft	5	REF		
82428	330.7 to 334.4 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	19	SF	$40	$740
82483	336.0 to 356.7 feet	Key Note Segment		5 ft	104			
82390	355.8 to 356.8 feet	Vertical Change	.26"	5 ft	5	REF		
82429	357.3 to 369.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	61	SF	$40	$2,440
82430	369.5 to 381.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	$7,380
82431	386.1 to 389.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
82484	389.8 to 411.2 feet	Key Note Segment		5 ft	107			
82391	410.9 to 411.9 feet	Vertical Change	-.35"	5 ft	5	REF		
82432	412.4 to 419.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,380
82433	424.8 to 441.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
82434	446.4 to 448.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
82435	450.5 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151321	REN WAY	TIMBERLINE DR	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82392	450.9 to 451.9 feet	Vertical Change	.29"	5 ft	5	REF		
82436	457.9 to 466.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$4,980
82437	468.3 to 470.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
82438	470.0 to 476.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
82485	476.3 to 497.8 feet	Key Note Segment		5 ft	108			
82393	476.5 to 477.5 feet	Vertical Change	.27"	5 ft	5	REF		
82439	497.9 to 499.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$300
82440	501.5 to 502.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
82441	502.7 to 503.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
82486	505.2 to 524.5 feet	Key Note Segment		5 ft	97			
82442	524.5 to 527.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	14	SF	$40	$560
82394	524.7 to 525.7 feet	Vertical Change	.27"	5 ft	5	REF		
82443	529.8 to 548.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	93	SF	$120	$11,100
82444	548.5 to 551.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
82445	557.8 to 562.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
82446	563.1 to 564.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
82447	568.2 to 574.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$4,020
82448	575.1 to 577.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
82449	578.5 to 583.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	$3,000
82450	584.8 to 588.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
82487	588.3 to 608.8 feet	Key Note Segment		5 ft	103			
82451	609.1 to 610.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	5	SF	$40	$200
82452	613.3 to 614.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
82488	614.8 to 635.4 feet	Key Note Segment		5 ft	103			
82453	638.3 to 645.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,440
82454	647.8 to 652.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
82455	655.0 to 661.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	$3,960
82456	662.4 to 681.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	$11,580

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151321	REN WAY	TIMBERLINE DR	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82395	666.6 to 667.6 feet	Vertical Change	.46"	5 ft	5	REF		
82457	685.4 to 688.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
82458	692.0 to 694.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
82459	697.1 to 698.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
82489	700.3 to 720.4 feet	Key Note Segment		5 ft	101			
82396	710.0 to 711.0 feet	Vertical Change	.41"	5 ft	5	REF		
82460	721.2 to 726.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
82490	726.3 to 747.8 feet	Key Note Segment		5 ft	108			
82397	748.1 to 749.1 feet	Vertical Change	.27"	5 ft	5	REF		
82461	748.6 to 750.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	$1,320
82398	751.0 to 752.0 feet	Vertical Change	.66"	5 ft	5	REF		
82462	751.1 to 752.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$720
82399	752.9 to 753.9 feet	Vertical Change	.97"	5 ft	5	REF		
82463	753.2 to 754.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
82400	754.6 to 755.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
82401	758.3 to 759.3 feet	Vertical Change	.29"	5 ft	5	REF		
82464	759.1 to 762.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
82465	764.7 to 766.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
82466	768.6 to 770.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
82467	770.0 to 772.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
82468	773.6 to 780.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840
82469	780.0 to 781.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
82402	782.3 to 783.3 feet	Vertical Change	.54"	5 ft	5	SF	$75	$375
82470	786.3 to 793.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
82471	796.7 to 808.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
82491	810.8 to 831.3 feet	Key Note Segment		5 ft	103			
82403	812.4 to 813.4 feet	Vertical Change	.4"	5 ft	5	REF		
82472	834.3 to 835.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151321	REN WAY	TIMBERLINE DR	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82492	835.5 to 857.0 feet	Key Note Segment		5 ft	108			
82473	860.3 to 880.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
82404	886.5 to 887.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
82474	887.8 to 894.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
82405	894.8 to 895.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
82475	896.0 to 902.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: S *side of* **REN WAY** *Starting at:* **TIMBERLINE DR** **$227,305.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151614	REN WAY	WESTBERRY BVD	ZAK WAY	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84600	0.0 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
84594	1.2 to 2.2 feet	**Vertical Change**	2.78"	5 ft	5	REF		
84605	5.8 to 19.7 feet	Key Note Segment		5 ft	70			
84595	20.9 to 21.9 feet	**Vertical Change**	.95"	5 ft	5	SF	$75	**$375**
84596	34.6 to 35.6 feet	**Vertical Change**	3.34"	5 ft	5	REF		
84601	35.3 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
84598	51.5 to 52.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
84602	55.5 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84599	58.2 to 59.2 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
84603	69.3 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84604	75.4 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **WESTBERRY BVD** **$11,325.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151314	REN WAY	WESTBERRY BVD	TIMBERLINE DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82347	0.4 to 3.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
82348	4.1 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82349	9.5 to 11.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
82350	11.1 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82340	13.5 to 14.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
82351	20.0 to 23.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
82341	23.1 to 24.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
82352	23.7 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
82342	26.4 to 27.4 feet	**Vertical Change**	.52"	5 ft	5	REF		
82343	31.4 to 32.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
82353	42.8 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
82345	43.0 to 44.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
82354	46.0 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
82346	59.3 to 60.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
82355	68.0 to 71.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
82356	71.4 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
82357	76.0 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
82358	81.7 to 82.7 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: S *side of* **REN WAY** *Starting at:* **WESTBERRY BVD** **$31,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151359	REN WAY	WOLFTRAP ST	DOUBLE TREE WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82880	0.6 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
82881	5.9 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
82895	24.2 to 45.3 feet	Key Note Segment		5 ft	106			
82882	48.4 to 50.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
82896	52.6 to 72.4 feet	Key Note Segment		5 ft	99			
82873	57.8 to 58.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
82874	62.7 to 63.7 feet	**Vertical Change**	.47"	5 ft	5	REF		
82883	72.7 to 77.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$3,000**
82884	81.2 to 82.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
82885	86.4 to 98.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,140**
82886	102.1 to 103.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
82876	102.7 to 103.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
82897	109.9 to 129.3 feet	Key Note Segment		5 ft	97			
82877	110.2 to 111.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
82887	130.0 to 135.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
82888	139.7 to 167.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,920**
82889	168.6 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
82890	180.3 to 182.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
82891	190.1 to 194.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
82898	194.7 to 214.7 feet	Key Note Segment		5 ft	100			
82892	217.9 to 220.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
82899	221.8 to 242.5 feet	Key Note Segment		5 ft	104			
82878	232.7 to 233.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
82893	248.4 to 265.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
82879	259.3 to 260.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
82894	267.3 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
82900	268.3 to 269.3 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **WOLFTRAP ST** **$66,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151630	REN WAY	ZAK WAY	KENT WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84780	0.0 to 5.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
84781	6.7 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
84782	12.5 to 19.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,260**
84783	22.2 to 23.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
84824	23.8 to 42.8 feet	Key Note Segment		5 ft	95			
84770	33.9 to 34.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
84784	43.8 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
84825	49.2 to 68.7 feet	Key Note Segment		5 ft	98			
84785	70.3 to 77.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
84771	79.1 to 80.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
84786	79.5 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
84787	82.9 to 89.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
84772	89.1 to 90.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
84788	89.2 to 94.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
84789	94.2 to 105.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
84790	106.0 to 124.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
84791	125.0 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
84826	128.4 to 147.2 feet	Key Note Segment		5 ft	94			
84792	148.3 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
84827	154.3 to 173.1 feet	Key Note Segment		5 ft	94			
84773	164.8 to 165.8 feet	**Vertical Change**	-.68"	5 ft	5	REF		
84793	174.8 to 187.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
84794	189.0 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
84795	193.8 to 195.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
84796	198.4 to 202.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
84797	205.1 to 206.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84774	207.7 to 208.7 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
84798	208.9 to 215.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151630	REN WAY	ZAK WAY	KENT WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84775	218.2 to 219.2 feet	Vertical Change	3.54"	5 ft	5	REF		
84799	218.7 to 225.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,200
84776	221.3 to 222.3 feet	Vertical Change	.38"	5 ft	5	REF		
84800	231.7 to 234.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,620
84828	234.4 to 252.6 feet	Key Note Segment		5 ft	91			
84777	243.7 to 244.7 feet	Vertical Change	.37"	5 ft	5	REF		
84801	253.5 to 254.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
84802	258.4 to 259.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
84829	259.8 to 279.4 feet	Key Note Segment		5 ft	98			
84778	269.8 to 270.8 feet	Vertical Change	.46"	5 ft	5	REF		
84779	278.8 to 279.8 feet	Vertical Change	.26"	5 ft	5	REF		
84803	280.1 to 282.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
84804	284.8 to 297.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	$7,860
84805	300.2 to 302.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
84806	307.6 to 322.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,120
84807	322.8 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
84808	328.8 to 342.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	$8,280
84830	342.6 to 362.8 feet	Key Note Segment		5 ft	101			
84809	366.3 to 369.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
84831	369.2 to 389.0 feet	Key Note Segment		5 ft	99			
84810	389.6 to 394.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,120
84811	398.8 to 400.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
84812	408.6 to 413.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
84813	413.9 to 416.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
84814	419.8 to 422.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
84815	423.3 to 424.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
84816	427.2 to 428.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
84817	431.0 to 436.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151630	REN WAY	ZAK WAY	KENT WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84818	439.5 to 448.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
84832	448.4 to 467.2 feet	Key Note Segment		5 ft	94			
84819	469.3 to 470.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
84833	474.0 to 493.4 feet	Key Note Segment		5 ft	97			
84820	495.2 to 496.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
84821	501.8 to 503.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84822	505.1 to 508.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
84823	511.0 to 516.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: N *side of* **REN WAY** *Starting at:* **ZAK WAY** **$136,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011344	RENEE WAY	LUCIA WAY	NOREEN WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116336	0.0 to 7.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,792**
116337	10.2 to 17.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	**$3,408**
116326	14.6 to 15.6 feet	**Vertical Change**	.3"	4 ft	4	REF		
116338	19.9 to 21.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
116339	21.7 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
116340	23.8 to 30.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	26	SF	$120	**$3,168**
116328	32.1 to 33.1 feet	**Vertical Change**	-.37"	4 ft	4	LF	$75	**$300**
116354	32.3 to 51.4 feet	Key Note Segment		4 ft	76			
116355	57.8 to 77.1 feet	Key Note Segment		4 ft	77			
116341	79.3 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
116342	99.5 to 101.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
116343	105.7 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,704**
116330	110.6 to 111.6 feet	**Vertical Change**	.38"	4 ft	4	REF		
116344	129.0 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
116345	133.3 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
116346	139.3 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
116356	146.0 to 164.0 feet	Key Note Segment		4 ft	72			
116357	172.1 to 191.0 feet	Key Note Segment		4 ft	76			
116331	191.4 to 192.4 feet	**Vertical Change**	.38"	4 ft	4	REF		
116347	211.3 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,360**
116332	211.6 to 212.6 feet	**Vertical Change**	-.32"	4 ft	4	REF		
116348	244.3 to 245.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
116349	253.8 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
116358	259.1 to 278.8 feet	Key Note Segment		4 ft	79			
116333	279.5 to 280.5 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
116350	280.6 to 282.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
116359	285.8 to 304.8 feet	Key Note Segment		4 ft	76			
116334	305.3 to 306.3 feet	**Vertical Change**	.29"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011344	RENEE WAY	LUCIA WAY	NOREEN WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116335	308.9 to 309.9 feet	Vertical Change	.46"	4 ft	4	LF	$75	**$300**
116351	318.8 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
116352	326.3 to 327.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$768**
116353	330.8 to 336.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	24	SF	$120	**$2,832**

TOTAL COST FOR: S *side of* **RENEE WAY** *Starting at:* **LUCIA WAY** **$43,812.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011341	RENEE WAY	NOREEN WAY	LUCIA WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116300	1.4 to 7.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	25	SF	$120	**$2,976**
116301	11.4 to 14.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	13	SF	$120	**$1,584**
116302	15.0 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**
116303	18.8 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,168**
116286	22.6 to 23.6 feet	**Vertical Change**	-.27"	4 ft	4	REF		
116304	30.1 to 31.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
116287	30.2 to 31.2 feet	**Vertical Change**	.35"	4 ft	4	REF		
116319	31.9 to 49.8 feet	Key Note Segment		4 ft	72			
116288	44.6 to 45.6 feet	**Vertical Change**	3.41"	4 ft	4	REF		
116305	50.3 to 51.3 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	4	SF	$40	**$160**
116306	51.6 to 53.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
116307	55.2 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
116320	58.3 to 85.8 feet	Key Note Segment		4 ft	110			
116289	87.7 to 88.7 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
116308	103.3 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	168	SF	$120	**$20,160**
116321	146.0 to 164.1 feet	Key Note Segment		4 ft	72			
116290	164.7 to 165.7 feet	**Vertical Change**	.45"	4 ft	4	LF	$75	**$300**
116309	167.4 to 172.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,448**
116291	171.8 to 172.8 feet	**Vertical Change**	.32"	4 ft	4	REF		
116322	173.3 to 190.2 feet	Key Note Segment		4 ft	68			
116310	192.3 to 195.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**
116311	195.8 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
116312	199.3 to 200.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$624**
116292	199.8 to 200.8 feet	**Vertical Change**	.38"	4 ft	4	REF		
116313	204.8 to 212.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	31	SF	$120	**$3,744**
116314	215.1 to 220.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,736**
116315	220.8 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	152	SF	$120	**$18,240**
116293	222.9 to 223.9 feet	**Vertical Change**	.26"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011341	RENEE WAY	NOREEN WAY	LUCIA WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116294	259.5 to 260.5 feet	Vertical Change	.32"	4 ft	4	LF	$75	$300
116323	259.8 to 278.3 feet	Key Note Segment		4 ft	74			
116295	276.6 to 277.6 feet	Vertical Change	.33"	4 ft	4	REF		
116316	284.0 to 285.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	$864
116324	285.8 to 303.8 feet	Key Note Segment		4 ft	72			
116325	290.7 to 291.7 feet	Protruding Object	72"	4 ft	4	JOB	$99	$99
116296	304.2 to 305.2 feet	Vertical Change	.26"	4 ft	4	REF		
116317	305.3 to 315.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	42	SF	$120	$5,040
116297	314.3 to 315.3 feet	Vertical Change	-.26"	4 ft	4	REF		
116318	316.3 to 337.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	83	SF	$120	$9,936
116298	325.3 to 326.3 feet	Vertical Change	-.29"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **RENEE WAY** *Starting at:* **NOREEN WAY** **$80,311.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111101	RHINE CT	PETITE AVE	PETITE AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90881	0.3 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
90882	5.7 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
90883	14.3 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
90871	36.6 to 37.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
90872	41.1 to 42.1 feet	**Vertical Change**	1.57"	5 ft	5	SF	$75	**$375**
90884	46.3 to 48.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
90885	50.1 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
90886	67.3 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
90873	67.8 to 68.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
90887	88.6 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90888	94.8 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
90901	97.4 to 112.3 feet	Key Note Segment		5 ft	75			
90874	112.9 to 113.9 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
90902	142.1 to 157.0 feet	Key Note Segment		5 ft	75			
90875	142.2 to 143.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
90889	158.7 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
90903	173.2 to 190.5 feet	Key Note Segment		5 ft	87			
90876	191.1 to 192.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
90890	196.4 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
90904	205.8 to 223.7 feet	Key Note Segment		5 ft	90			
90891	228.7 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
90892	251.0 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
90905	255.5 to 275.5 feet	Key Note Segment		5 ft	100			
90877	255.7 to 256.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
90878	275.9 to 276.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
90893	281.9 to 285.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
90894	286.8 to 297.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
90895	298.3 to 302.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111101	RHINE CT	PETITE AVE	PETITE AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90896	303.2 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
90897	326.8 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
90898	334.7 to 336.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
90899	338.4 to 345.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
90879	340.9 to 341.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
90880	345.3 to 346.3 feet	**Vertical Change**	1.89"	5 ft	5	SF	$75	**$375**
90900	349.5 to 364.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**

TOTAL COST FOR: S/E/N *side of* **RHINE CT** *Starting at:* **PETITE AVE** **$82,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131612	RIVER POINTE	PRIVATE	RIVERVIEW DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99681	1.9 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
99682	6.3 to 23.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,560**
99683	29.3 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
99684	45.6 to 51.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
99685	51.3 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
99686	57.3 to 65.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
99687	66.4 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,300**
99688	90.0 to 99.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
99689	99.5 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
99690	113.5 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
99691	118.5 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
99680	121.5 to 122.5 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W *side of* **RIVER POINTE** *Starting at:* **PRIVATE** **$55,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202101111	RIVERSIDE CT	705 RIVERSIDE CT	E RIVERSIDE DR	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131198	3.1 to 21.4 feet	Key Note Segment		5 ft	92			
131189	25.9 to 26.9 feet	**Vertical Change**	2.85"	5 ft	5	SF	$75	**$375**
131199	28.8 to 47.2 feet	Key Note Segment		5 ft	92			
131190	31.0 to 32.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
131191	46.6 to 47.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
131194	49.2 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
131195	73.1 to 77.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
131200	77.5 to 95.8 feet	Key Note Segment		5 ft	92			
131192	87.7 to 88.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
131193	95.9 to 96.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
131196	100.3 to 101.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
131197	103.4 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
131201	106.5 to 107.7 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **RIVERSIDE CT** *Starting at:* **705 RIVERSIDE CT** **$6,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202101110	RIVERSIDE CT	E RIVERSIDE DR	705 RIVERSIDE CT	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131180	0.6 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
131181	7.7 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131186	9.6 to 29.5 feet	Key Note Segment		5 ft	100			
131175	29.4 to 30.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
131182	30.1 to 33.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
131183	33.8 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
131176	35.6 to 36.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
131184	53.4 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
131187	57.3 to 75.9 feet	Key Note Segment		5 ft	93			
131177	67.5 to 68.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
131188	83.6 to 100.8 feet	Key Note Segment		5 ft	86			
131178	92.7 to 93.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
131179	102.5 to 103.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
131185	102.5 to 104.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: W *side of* **RIVERSIDE CT** *Starting at:* **E RIVERSIDE DR** **$7,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201519	RIVERSIDE DR	COLUMBIA ST	SONORA ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41410	20.2 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
41411	26.8 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
41412	33.5 to 40.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
41398	35.2 to 36.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
41399	42.1 to 43.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
41413	43.6 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
41414	69.3 to 72.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
41415	73.3 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
41416	79.1 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
41400	81.0 to 82.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
41417	82.4 to 84.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
41418	85.6 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
41419	87.3 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
41420	95.3 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
41429	104.4 to 125.5 feet	Key Note Segment		5 ft	106			
41401	107.0 to 111.9 feet	**Vertical Change**	.43"	5 ft	25	REF		
41402	114.7 to 115.7 feet	**Vertical Change**	2.93"	5 ft	5	REF		
41403	123.8 to 124.8 feet	**Vertical Change**	.69"	5 ft	5	REF		
41421	125.5 to 128.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$660**
41422	129.7 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
41404	130.2 to 131.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
41405	144.0 to 145.0 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
41423	148.2 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
41424	156.1 to 160.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
41430	160.8 to 173.4 feet	Key Note Segment		5 ft	63			
41406	170.8 to 171.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
41425	174.1 to 180.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
41407	179.5 to 180.5 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201519	RIVERSIDE DR	COLUMBIA ST	SONORA ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41431	181.4 to 200.0 feet	Key Note Segment		5 ft	93			
41408	192.3 to 193.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
41426	202.2 to 227.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
41409	213.7 to 214.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
41427	228.3 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
41428	232.3 to 235.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **RIVERSIDE DR** *Starting at:* **COLUMBIA ST** **$77,445.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201507	RIVERSIDE DR	N D ST	SIERRA ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41362	0.0 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
41355	15.6 to 16.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
41363	16.4 to 24.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
41364	25.1 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,080**
41356	58.5 to 59.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
41365	79.1 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
41366	98.4 to 101.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
41379	101.9 to 124.2 feet	Key Note Segment		5 ft	112			
41367	124.4 to 131.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	37	SF	$40	**$1,480**
41357	130.2 to 131.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
41358	144.4 to 145.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
41368	147.8 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
41359	157.2 to 158.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
41369	166.6 to 167.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
41370	167.6 to 177.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
41360	178.8 to 179.8 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
41371	183.1 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
41372	199.5 to 201.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
41373	201.6 to 203.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
41374	205.4 to 206.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
41375	209.2 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
41361	212.8 to 213.8 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
41376	221.8 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
41377	229.2 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
41378	232.7 to 238.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: N *side of* **RIVERSIDE DR** *Starting at:* **N D ST** **$83,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201621	RIVERSIDE DR	SHARON BVD	N D ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41860	1.0 to 2.0 feet	Vertical Change	-.31"	12 ft	12	REF		
41875	1.3 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	24	SF	$120	$2,880
41876	5.6 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	122	SF	$120	$14,688
41877	19.1 to 22.0 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	35	SF	$120	$4,176
41878	22.0 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	28	SF	$120	$3,312
41879	36.3 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	26	SF	$120	$3,168
41880	38.5 to 43.0 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	54	SF	$120	$6,480
41881	43.5 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	42	SF	$120	$5,040
41882	50.7 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	175	SF	$120	$21,024
41883	69.8 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	138	SF	$120	$16,560
41884	83.4 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	305	SF	$120	$36,576
41885	118.9 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	47	SF	$120	$5,616
41886	135.5 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	138	SF	$120	$16,560
41861	137.5 to 138.5 feet	Vertical Change	.45"	12 ft	12	REF		
41887	148.2 to 163.9 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	188	SF	$120	$22,608
41862	160.9 to 161.9 feet	Vertical Change	-.3"	12 ft	12	REF		
41888	172.1 to 182.3 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	122	SF	$120	$14,688
41889	182.8 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	200	SF	$120	$24,048
41890	202.8 to 205.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	35	SF	$120	$4,176
41863	208.3 to 209.3 feet	Vertical Change	.67"	12 ft	12	REF		
41891	209.3 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	59	SF	$120	$7,056
41864	217.7 to 218.7 feet	Vertical Change	.75"	12 ft	12	REF		
41892	218.1 to 225.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	89	SF	$120	$10,656
41893	228.6 to 235.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	78	SF	$120	$9,360
41894	238.0 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	430	SF	$120	$51,552
41895	275.9 to 281.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	68	SF	$120	$8,208
41896	290.2 to 294.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	50	SF	$120	$6,048
41897	417.9 to 419.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	19	SF	$120	$2,304

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201621	RIVERSIDE DR	SHARON BVD	N D ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41898	429.8 to 431.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	24	SF	$120	**$2,880**
41899	434.9 to 437.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	29	SF	$120	**$3,456**
41900	439.4 to 440.6 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	14	SF	$120	**$1,728**
41901	442.2 to 446.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	49	SF	$120	**$5,904**
41865	443.9 to 444.9 feet	**Vertical Change**	.62"	12 ft	12	REF		
41902	448.7 to 451.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	32	SF	$120	**$3,888**
41903	462.3 to 466.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	48	SF	$120	**$5,760**
41904	470.8 to 474.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	47	SF	$120	**$5,616**
41905	477.3 to 479.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	29	SF	$120	**$3,456**
41906	484.5 to 500.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	188	SF	$120	**$22,608**
41867	533.9 to 534.9 feet	**Vertical Change**	-.29"	12 ft	12	LF	$75	**$900**
41907	537.8 to 539.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	16	SF	$120	**$1,872**
41908	558.0 to 564.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	73	SF	$120	**$8,784**
41909	566.3 to 575.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	106	SF	$120	**$12,672**
41868	578.9 to 579.9 feet	**Vertical Change**	.34"	12 ft	12	REF		
41910	579.6 to 581.2 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	19	SF	$120	**$2,304**
41911	584.4 to 592.2 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	94	SF	$120	**$11,232**
41912	594.6 to 602.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	96	SF	$120	**$11,520**
41913	606.2 to 618.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	146	SF	$120	**$17,568**
41869	618.0 to 619.0 feet	**Vertical Change**	.41"	12 ft	12	REF		
41914	619.9 to 625.0 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	61	SF	$120	**$7,344**
41870	623.4 to 624.4 feet	**Vertical Change**	.3"	12 ft	12	REF		
41915	625.3 to 628.8 feet	Cross Slope (PAR)	6.0-7.0%	12 ft	42	SF	$120	**$5,040**
41916	629.3 to 632.9 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	43	SF	$120	**$5,184**
41917	636.5 to 663.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	328	SF	$120	**$39,312**
41871	638.4 to 639.4 feet	**Vertical Change**	.3"	12 ft	12	REF		
41918	666.2 to 671.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	67	SF	$120	**$8,064**
41872	670.8 to 671.8 feet	**Vertical Change**	.32"	12 ft	12	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201621	RIVERSIDE DR	SHARON BVD	N D ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41919	674.2 to 681.6 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	89	SF	$120	**$10,656**
41920	682.1 to 700.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	218	SF	$120	**$26,208**
41921	703.7 to 719.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	191	SF	$120	**$22,896**
41922	724.3 to 725.7 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	17	SF	$120	**$2,016**
41923	731.3 to 735.0 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	44	SF	$120	**$5,328**
41924	736.1 to 750.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	178	SF	$120	**$21,312**
41925	757.9 to 772.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	173	SF	$120	**$20,736**
41926	776.3 to 794.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	222	SF	$120	**$26,640**
41927	794.8 to 796.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	18	SF	$120	**$2,160**
41873	795.6 to 796.6 feet	**Vertical Change**	.29"	12 ft	12	REF		
41928	798.6 to 799.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	14	SF	$120	**$1,728**
41929	800.8 to 804.9 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	49	SF	$120	**$5,904**
41930	805.1 to 826.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	254	SF	$120	**$30,528**
41931	828.4 to 840.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	149	SF	$120	**$17,856**
41932	842.4 to 846.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	43	SF	$120	**$5,184**
41933	859.5 to 884.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	302	SF	$120	**$36,288**
41874	870.3 to 871.3 feet	**Vertical Change**	-.51"	12 ft	12	REF		
41934	889.3 to 905.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	193	SF	$120	**$23,184**
41935	936.8 to 938.5 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	20	SF	$120	**$2,448**
41936	954.5 to 958.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	46	SF	$120	**$5,472**
41937	958.3 to 961.4 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	37	SF	$120	**$4,464**

TOTAL COST FOR: S *side of* **RIVERSIDE DR** *Starting at:* **SHARON BVD** **$754,884.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105201510	RIVERSIDE DR	SIERRA ST	700 SIERRA ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41380	1.4 to 2.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
41386	2.1 to 5.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
41387	7.8 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
41388	12.9 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
41381	18.4 to 19.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
41389	21.8 to 28.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
41382	23.3 to 27.1 feet	**Vertical Change**	.37"	5 ft	19	REF		
41390	28.3 to 33.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,300**
41383	33.1 to 34.1 feet	**Vertical Change**	.6"	5 ft	5	REF		
41391	35.1 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
41392	45.7 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
41384	61.7 to 62.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
41393	62.5 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41394	65.2 to 67.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
41395	68.9 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
41396	73.3 to 79.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
41397	79.4 to 98.9 feet	Key Note Segment		5 ft	97			
41385	80.4 to 81.4 feet	**Vertical Change**	.97"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **RIVERSIDE DR** *Starting at:* **SIERRA ST** **$35,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105201523	RIVERSIDE DR	SONORA ST	SHARON BVD	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41435	0.0 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
41436	18.5 to 24.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
41444	25.2 to 33.7 feet	Key Note Segment		5 ft	43			
41437	33.7 to 38.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	24	SF	$40	**$980**
41438	39.6 to 65.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
41432	61.8 to 62.8 feet	**Vertical Change**	.55"	5 ft	5	REF		
41439	65.5 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
41445	68.6 to 77.2 feet	Key Note Segment		5 ft	43			
41440	77.2 to 81.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$920**
41441	81.8 to 92.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
41433	94.0 to 95.0 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
41442	95.2 to 116.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,900**
41443	116.7 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
41434	122.0 to 123.0 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **RIVERSIDE DR** *Starting at:* **SONORA ST** **$54,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170738	RIVERVIEW DR	1030 CAITLAN DR	CAITLAN DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70821	0.0 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
70818	2.8 to 3.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70822	6.2 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
70823	14.5 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
70824	22.4 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
70825	25.4 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
70826	43.9 to 48.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
70827	48.8 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
70828	52.6 to 56.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
70819	53.7 to 54.7 feet	**Vertical Change**	-.44"	5 ft	5	REF		
70829	63.5 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
70820	67.9 to 68.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
70830	71.3 to 76.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **1030 CAITLAN DR** **$38,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140929	RIVERVIEW DR	1405 RIVERVIEW DR	1425 RIVERVIEW DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99897	1.7 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
99863	2.3 to 3.3 feet	**Vertical Change**	.34"	3 ft	3	REF		
99864	7.7 to 8.7 feet	**Vertical Change**	-1.68"	3 ft	3	SF	$75	**$225**
99898	11.4 to 12.4 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	3	SF	$120	**$360**
99865	17.9 to 18.9 feet	**Vertical Change**	.49"	3 ft	3	LF	$75	**$225**
99899	19.7 to 23.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	10	SF	$120	**$1,224**
99900	34.8 to 35.9 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	3	SF	$120	**$396**
99866	38.5 to 39.5 feet	**Vertical Change**	.26"	3 ft	3	LF	$75	**$225**
99901	39.7 to 40.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$360**
99867	43.8 to 44.8 feet	**Vertical Change**	-.31"	3 ft	3	LF	$75	**$225**
99902	48.7 to 50.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$648**
99868	49.9 to 50.9 feet	**Vertical Change**	.51"	3 ft	3	REF		
99869	53.2 to 54.2 feet	**Vertical Change**	.26"	3 ft	3	LF	$75	**$225**
99903	54.9 to 56.2 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	4	SF	$120	**$468**
99870	55.6 to 59.1 feet	**Vertical Change**	-.26"	3 ft	11	REF		
99904	57.3 to 58.4 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	3	SF	$120	**$396**
99871	60.9 to 61.9 feet	**Vertical Change**	.59"	3 ft	3	REF		
99905	61.8 to 64.4 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	8	SF	$120	**$936**
99872	64.2 to 65.2 feet	**Vertical Change**	.28"	3 ft	3	REF		
99906	64.6 to 68.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	12	SF	$120	**$1,476**
99873	69.2 to 70.2 feet	**Vertical Change**	-.37"	3 ft	3	LF	$75	**$225**
99907	70.6 to 75.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	13	SF	$120	**$1,584**
99874	86.3 to 87.3 feet	**Vertical Change**	-.28"	3 ft	3	LF	$75	**$225**
99875	88.3 to 89.3 feet	**Vertical Change**	.56"	3 ft	3	SF	$75	**$225**
99908	89.8 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
99876	92.4 to 93.4 feet	**Vertical Change**	.58"	3 ft	3	SF	$75	**$225**
99877	94.9 to 95.9 feet	**Vertical Change**	-.27"	3 ft	3	REF		
99909	95.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140929	RIVERVIEW DR	1405 RIVERVIEW DR	1425 RIVERVIEW DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99878	102.9 to 103.9 feet	Vertical Change	.29"	3 ft	3	REF		
99910	103.8 to 105.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$540
99911	110.6 to 112.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	$828
99912	117.8 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	$792
99931	122.1 to 137.3 feet	Key Note Segment		3 ft	46			
99880	122.8 to 123.8 feet	Vertical Change	.28"	3 ft	3	REF		
99881	140.8 to 141.8 feet	Vertical Change	.48"	3 ft	3	LF	$75	$225
99913	146.4 to 147.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	$540
99932	148.3 to 163.8 feet	Key Note Segment		3 ft	47			
99882	149.3 to 150.3 feet	Vertical Change	-.27"	3 ft	3	REF		
99914	163.8 to 177.8 feet	Cross Slope (Driveway)	2.0-3.0%	3 ft	42	SF	$40	$1,680
99883	164.1 to 165.1 feet	Vertical Change	.28"	3 ft	3	REF		
99884	169.6 to 170.6 feet	Vertical Change	-.51"	3 ft	3	REF		
99915	184.4 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	13	SF	$120	$1,548
99885	200.5 to 201.5 feet	Vertical Change	-.28"	3 ft	3	LF	$75	$225
99886	207.3 to 208.3 feet	Vertical Change	2.12"	3 ft	3	SF	$75	$225
99887	210.9 to 211.9 feet	Vertical Change	.41"	3 ft	3	LF	$75	$225
99916	215.1 to 224.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	28	SF	$120	$3,348
99917	227.1 to 228.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	$432
99918	233.0 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	$1,908
99933	238.3 to 252.3 feet	Key Note Segment		3 ft	42			
99888	238.7 to 239.7 feet	Vertical Change	.5"	3 ft	3	REF		
99889	253.6 to 254.6 feet	Vertical Change	.36"	3 ft	3	REF		
99919	254.0 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	26	SF	$120	$3,168
99934	263.1 to 281.3 feet	Key Note Segment		3 ft	55			
99920	282.0 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	110	SF	$120	$13,140
99890	287.4 to 288.4 feet	Vertical Change	-.27"	3 ft	3	REF		
99921	319.3 to 328.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	28	SF	$120	$3,348

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140929	RIVERVIEW DR	1405 RIVERVIEW DR	1425 RIVERVIEW DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99891	328.6 to 329.6 feet	**Vertical Change**	-.36"	3 ft	3	REF		
99922	328.6 to 333.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,656**
99892	333.7 to 334.7 feet	**Vertical Change**	-.26"	3 ft	3	LF	$75	**$225**
99923	335.3 to 337.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$648**
99924	341.8 to 345.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**
99925	347.6 to 355.2 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	23	SF	$120	**$2,736**
99926	357.8 to 360.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$936**
99894	358.6 to 359.6 feet	**Vertical Change**	.35"	3 ft	3	REF		
99935	360.9 to 385.5 feet	Key Note Segment		3 ft	74			
99895	373.8 to 374.8 feet	**Vertical Change**	.5"	3 ft	3	REF		
99927	385.5 to 387.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	3 ft	7	SF	$40	**$288**
99928	387.9 to 389.5 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
99929	392.3 to 405.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	39	SF	$120	**$4,716**
99930	407.4 to 420.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	40	SF	$120	**$4,788**

TOTAL COST FOR: N *side of* **RIVERVIEW DR** *Starting at:* **1405 RIVERVIEW DR** **$61,782.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201140933	RIVERVIEW DR	1431 RIVERVIEW DR	W CENTRAL AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99936	7.0 to 8.0 feet	Vertical Change	.43"	3 ft	3	LF	$75	$225
99950	10.2 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$468
99973	14.0 to 28.1 feet	Key Note Segment		3 ft	42			
99937	14.9 to 15.9 feet	Vertical Change	.45"	3 ft	3	REF		
99951	28.1 to 30.6 feet	Cross Slope (Driveway)	3.0-4.0%	3 ft	8	SF	$40	$300
99938	28.3 to 29.3 feet	Vertical Change	.27"	3 ft	3	REF		
99952	30.6 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	32	SF	$120	$3,888
99939	40.7 to 41.7 feet	Vertical Change	.29"	3 ft	3	REF		
99953	44.3 to 48.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	12	SF	$120	$1,404
99954	48.2 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	$360
99955	50.7 to 60.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	29	SF	$120	$3,492
99974	63.6 to 78.2 feet	Key Note Segment		3 ft	44			
99940	78.7 to 79.7 feet	Vertical Change	.27"	3 ft	3	REF		
99956	79.0 to 81.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	$972
99957	84.4 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	11	SF	$120	$1,332
99958	88.5 to 92.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	13	SF	$120	$1,512
99975	93.0 to 107.4 feet	Key Note Segment		3 ft	43			
99941	95.9 to 96.9 feet	Vertical Change	.78"	3 ft	3	REF		
99942	107.7 to 108.7 feet	Vertical Change	.36"	3 ft	3	REF		
99959	107.8 to 110.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	$972
99960	112.0 to 114.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	$972
99961	117.1 to 131.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	42	SF	$120	$5,076
99943	120.7 to 121.7 feet	Vertical Change	-.68"	3 ft	3	REF		
99962	135.1 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	$1,692
99963	140.0 to 145.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	$2,016
99944	147.5 to 148.5 feet	Vertical Change	.56"	3 ft	3	SF	$75	$225
99945	161.3 to 162.3 feet	Vertical Change	-.35"	3 ft	3	LF	$75	$225
99964	165.4 to 166.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	$360

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201140933	RIVERVIEW DR	1431 RIVERVIEW DR	W CENTRAL AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99965	168.6 to 170.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$792**
99966	185.0 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	28	SF	$120	**$3,348**
99967	196.8 to 199.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$900**
99968	202.7 to 203.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
99946	203.0 to 204.0 feet	**Vertical Change**	.59"	3 ft	3	REF		
99947	205.8 to 206.8 feet	**Vertical Change**	-.4"	3 ft	3	REF		
99969	206.6 to 207.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$396**
99970	208.6 to 211.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,152**
99948	209.3 to 210.3 feet	**Vertical Change**	.69"	3 ft	3	REF		
99971	214.9 to 216.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$504**
99972	218.9 to 226.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	22	SF	$120	**$2,628**
99949	222.2 to 223.2 feet	**Vertical Change**	.43"	3 ft	3	REF		

TOTAL COST FOR: W *side of* **RIVERVIEW DR** *Starting at:* **1431 RIVERVIEW DR** **$35,607.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170741	RIVERVIEW DR	CAITLAN DR	SUMMER SET LN	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70840	0.0 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
70841	9.1 to 13.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
70842	14.3 to 27.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
70870	27.9 to 52.1 feet	Key Note Segment		5 ft	121			
70831	45.7 to 46.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
70843	54.0 to 60.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
70832	55.4 to 56.4 feet	**Vertical Change**	1.72"	5 ft	5	REF		
70844	61.8 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
70845	67.4 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
70846	74.4 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
70871	86.9 to 115.5 feet	Key Note Segment		5 ft	143			
70847	117.4 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
70872	133.8 to 158.8 feet	Key Note Segment		5 ft	125			
70833	143.2 to 144.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
70834	149.4 to 150.4 feet	**Vertical Change**	3.48"	5 ft	5	REF		
70835	152.1 to 153.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
70848	158.8 to 170.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	57	SF	$40	**$2,300**
70849	170.5 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
70850	185.6 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
70851	193.0 to 199.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
70852	199.8 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
70853	205.3 to 207.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
70873	207.9 to 229.3 feet	Key Note Segment		5 ft	107			
70836	223.2 to 224.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
70854	230.3 to 231.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
70855	232.0 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
70837	235.4 to 236.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
70856	260.5 to 263.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170741	RIVERVIEW DR	CAITLAN DR	SUMMER SET LN	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70857	264.4 to 271.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
70858	274.5 to 275.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70859	278.1 to 281.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
70860	283.3 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
70861	287.8 to 288.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
70862	291.3 to 293.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
70874	294.1 to 319.2 feet	Key Note Segment		5 ft	125			
70863	320.2 to 324.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
70864	326.0 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
70838	348.8 to 349.8 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
70865	360.0 to 361.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
70866	361.8 to 376.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
70839	377.9 to 378.9 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
70867	385.1 to 400.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
70868	406.8 to 411.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
70869	418.7 to 422.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **CAITLAN DR** **$119,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100103	0.5 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
100104	3.7 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	**$1,836**
100207	8.8 to 21.8 feet	Key Note Segment		3 ft	39			
100062	9.6 to 10.6 feet	**Vertical Change**	-.55"	3 ft	3	REF		
100105	22.5 to 23.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	4	SF	$40	**$156**
100106	30.6 to 34.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	13	SF	$120	**$1,548**
100063	36.3 to 37.3 feet	**Vertical Change**	-.67"	3 ft	3	SF	$75	**$225**
100107	40.5 to 52.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	37	SF	$120	**$4,392**
100064	60.1 to 61.1 feet	**Vertical Change**	.66"	3 ft	3	REF		
100108	60.8 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
100109	80.9 to 83.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$828**
100065	85.3 to 86.3 feet	**Vertical Change**	.26"	3 ft	3	REF		
100110	85.4 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,044**
100066	97.9 to 98.9 feet	**Vertical Change**	.29"	3 ft	3	LF	$75	**$225**
100208	109.5 to 131.8 feet	Key Note Segment		3 ft	67			
100067	121.1 to 122.1 feet	**Vertical Change**	.28"	3 ft	3	REF		
100111	133.1 to 135.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$1,008**
100112	137.6 to 141.0 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	10	SF	$120	**$1,224**
100068	138.7 to 139.7 feet	**Vertical Change**	.28"	3 ft	3	REF		
100113	141.5 to 143.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$540**
100209	143.0 to 159.2 feet	Key Note Segment		3 ft	49			
100114	159.2 to 182.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	70	SF	$40	**$2,784**
100069	175.5 to 176.5 feet	**Vertical Change**	-.26"	3 ft	3	REF		
100115	189.5 to 190.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
100116	195.4 to 198.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$1,008**
100117	210.6 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	40	SF	$120	**$4,752**
100118	227.8 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$900**
100119	231.6 to 237.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100070	237.1 to 238.1 feet	Vertical Change	.28"	3 ft	3	REF		
100210	254.1 to 270.1 feet	Key Note Segment		3 ft	48			
100120	270.1 to 272.8 feet	Cross Slope (Driveway)	3.0-4.0%	3 ft	8	SF	$40	$324
100121	275.6 to 281.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	16	SF	$120	$1,944
100211	281.4 to 298.0 feet	Key Note Segment		3 ft	50			
100122	298.0 to 305.8 feet	Cross Slope (Driveway)	2.0-3.0%	3 ft	23	SF	$40	$936
100071	298.4 to 299.4 feet	Vertical Change	.37"	3 ft	3	REF		
100123	305.9 to 310.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	12	SF	$120	$1,476
100124	310.0 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$468
100072	311.9 to 312.9 feet	Vertical Change	.3"	3 ft	3	LF	$75	$225
100125	314.3 to 336.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	67	SF	$120	$8,064
100073	345.3 to 346.3 feet	Vertical Change	-.4"	3 ft	3	LF	$75	$225
100212	349.4 to 358.3 feet	Key Note Segment		3 ft	27			
100074	350.4 to 351.4 feet	Vertical Change	.43"	3 ft	3	REF		
100075	352.7 to 353.7 feet	Vertical Change	-.3"	3 ft	3	REF		
100126	358.3 to 361.9 feet	Cross Slope (Driveway)	5.0-6.0%	3 ft	11	SF	$40	$432
100076	359.1 to 360.1 feet	Vertical Change	-.36"	3 ft	3	REF		
100127	363.3 to 364.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	$396
100128	368.1 to 369.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$576
100129	372.5 to 379.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	20	SF	$120	$2,412
100077	377.8 to 378.8 feet	Vertical Change	.33"	3 ft	3	REF		
100130	379.8 to 388.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	25	SF	$120	$2,988
100131	390.7 to 391.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	$360
100213	392.0 to 406.6 feet	Key Note Segment		3 ft	44			
100214	420.1 to 435.3 feet	Key Note Segment		3 ft	46			
100078	427.3 to 428.3 feet	Vertical Change	-.29"	3 ft	3	REF		
100079	436.0 to 437.0 feet	Vertical Change	-.3"	3 ft	3	REF		
100132	436.7 to 442.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	$2,088

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100133	443.6 to 445.3 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$612**
100134	446.6 to 450.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	12	SF	$120	**$1,404**
100135	452.7 to 454.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$576**
100136	456.0 to 463.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	21	SF	$120	**$2,520**
100215	463.6 to 472.3 feet	Key Note Segment		3 ft	26			
100137	473.3 to 475.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$864**
100138	481.7 to 484.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$972**
100139	485.8 to 488.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$900**
100140	488.3 to 489.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
100141	497.1 to 500.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	**$1,116**
100142	501.3 to 503.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$792**
100143	510.0 to 511.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
100144	515.1 to 517.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$684**
100145	517.9 to 520.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$936**
100146	523.8 to 528.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	**$1,836**
100147	540.7 to 542.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
100216	542.6 to 556.6 feet	Key Note Segment		3 ft	42			
100083	557.9 to 558.9 feet	**Vertical Change**	.4"	3 ft	3	LF	$75	**$225**
100148	560.6 to 562.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
100149	566.9 to 568.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
100217	568.0 to 582.7 feet	Key Note Segment		3 ft	44			
100084	583.9 to 584.9 feet	**Vertical Change**	.26"	3 ft	3	REF		
100150	584.3 to 585.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
100085	592.2 to 593.2 feet	**Vertical Change**	-.3"	3 ft	3	LF	$75	**$225**
100151	603.1 to 606.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,080**
100152	618.1 to 620.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$792**
100218	620.6 to 631.3 feet	Key Note Segment		3 ft	32			
100153	640.1 to 641.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$648**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100154	641.9 to 643.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$468
100155	645.8 to 653.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	23	SF	$120	$2,808
100156	670.6 to 672.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	$504
100086	671.8 to 672.8 feet	Vertical Change	3.2"	3 ft	3	REF		
100157	672.6 to 677.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	$1,692
100219	679.3 to 693.9 feet	Key Note Segment		3 ft	44			
100158	696.1 to 697.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$612
100159	698.6 to 699.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	$360
100220	706.5 to 721.2 feet	Key Note Segment		3 ft	44			
100160	722.2 to 730.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	24	SF	$120	$2,916
100087	728.0 to 729.0 feet	Vertical Change	-.34"	3 ft	3	REF		
100161	730.3 to 732.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	6	SF	$120	$756
100162	734.8 to 736.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$468
100163	743.4 to 749.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	19	SF	$120	$2,268
100088	744.0 to 745.0 feet	Vertical Change	-.26"	3 ft	3	REF		
100164	749.7 to 755.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	18	SF	$120	$2,160
100165	756.3 to 757.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	$360
100166	760.1 to 762.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	$828
100167	763.5 to 769.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	$1,980
100168	769.2 to 774.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	$2,016
100169	776.3 to 778.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	6	SF	$120	$756
100170	780.0 to 783.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	$1,224
100089	783.3 to 784.3 feet	Vertical Change	.31"	3 ft	3	REF		
100171	783.4 to 789.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	20	SF	$120	$2,340
100172	792.3 to 796.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	13	SF	$120	$1,548
100090	794.7 to 795.7 feet	Vertical Change	-.26"	3 ft	3	REF		
100173	797.9 to 802.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	$1,764
100174	805.2 to 808.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	$1,080

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100091	806.3 to 807.3 feet	Vertical Change	-.48"	3 ft	3	REF		
100175	810.3 to 817.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	22	SF	$120	$2,628
100221	817.8 to 832.8 feet	Key Note Segment		3 ft	45			
100176	833.2 to 836.3 feet	Cross Slope (Driveway)	5.0-6.0%	3 ft	9	SF	$40	$372
100092	838.8 to 839.8 feet	Vertical Change	-.3"	3 ft	3	REF		
100177	839.3 to 844.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	$1,800
100178	845.3 to 870.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	75	SF	$120	$9,000
100179	872.3 to 881.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	26	SF	$120	$3,132
100222	881.0 to 895.3 feet	Key Note Segment		3 ft	43			
100180	898.0 to 906.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	25	SF	$120	$2,952
100181	908.6 to 911.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	$972
100182	911.3 to 928.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	52	SF	$120	$6,264
100183	931.3 to 936.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	16	SF	$120	$1,944
100184	936.7 to 938.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	$540
100185	940.1 to 951.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	35	SF	$120	$4,212
100223	951.8 to 969.9 feet	Key Note Segment		3 ft	54			
100093	952.8 to 953.8 feet	Vertical Change	-.31"	3 ft	3	REF		
100186	969.9 to 971.1 feet	Cross Slope (Driveway)	4.0-5.0%	3 ft	4	SF	$40	$144
100094	971.9 to 972.9 feet	Vertical Change	1.8"	3 ft	3	REF		
100187	972.8 to 973.9 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	3	SF	$120	$396
100188	974.9 to 976.5 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	5	SF	$120	$576
100189	979.1 to 981.5 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	7	SF	$120	$864
100095	985.0 to 986.0 feet	Vertical Change	.37"	3 ft	3	REF		
100190	985.5 to 993.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	25	SF	$120	$2,988
100191	998.5 to 1000.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	$540
100192	1003.3 to 1011.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	24	SF	$120	$2,844
100097	1010.7 to 1011.7 feet	Vertical Change	-.64"	3 ft	3	REF		
100193	1015.0 to 1021.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	18	SF	$120	$2,196

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140945	RIVERVIEW DR	CENTRAL PL	N SCHNOOR AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100224	1022.3 to 1039.1 feet	Key Note Segment		3 ft	50			
100194	1039.1 to 1045.0 feet	Cross Slope (Driveway)	2.0-3.0%	3 ft	18	SF	$40	**$708**
100098	1039.7 to 1040.7 feet	Vertical Change	-.3"	3 ft	3	REF		
100099	1043.8 to 1044.8 feet	Vertical Change	.3"	3 ft	3	REF		
100195	1050.6 to 1051.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
100196	1053.3 to 1054.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$432**
100197	1061.7 to 1067.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	**$2,016**
100198	1071.4 to 1078.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	21	SF	$120	**$2,520**
100199	1081.3 to 1085.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	13	SF	$120	**$1,548**
100200	1088.7 to 1090.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$576**
100201	1092.1 to 1095.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	11	SF	$120	**$1,332**
100100	1096.3 to 1097.3 feet	Vertical Change	.6"	3 ft	3	SF	$75	**$225**
100202	1098.1 to 1101.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	**$1,080**
100101	1098.5 to 1099.5 feet	Vertical Change	-.36"	3 ft	3	REF		
100203	1103.4 to 1111.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	25	SF	$120	**$2,988**
100204	1112.4 to 1114.0 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	5	SF	$120	**$576**
100205	1115.3 to 1125.0 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	29	SF	$120	**$3,492**
100102	1125.1 to 1126.1 feet	Vertical Change	-.46"	3 ft	3	LF	$75	**$225**
100206	1136.1 to 1137.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**

TOTAL COST FOR: N *side of* **RIVERVIEW DR** *Starting at:* **CENTRAL PL** **$160,332.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131354	RIVERVIEW DR	IMPERIAL DR	N SCHNOOR AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97992	0.0 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
97986	4.3 to 5.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
97993	13.4 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
97987	19.5 to 20.5 feet	**Vertical Change**	.52"	5 ft	5	REF		
97994	20.3 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
98009	33.3 to 56.5 feet	Key Note Segment		5 ft	116			
97988	33.9 to 34.9 feet	**Vertical Change**	2.96"	5 ft	5	REF		
97995	56.5 to 63.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,320**
97996	65.4 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
97997	81.5 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
97998	93.5 to 96.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
97999	96.5 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98010	98.2 to 112.4 feet	Key Note Segment		5 ft	71			
98000	112.4 to 116.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
98001	119.7 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
98011	124.1 to 146.8 feet	Key Note Segment		5 ft	114			
97989	131.3 to 132.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
97990	147.9 to 148.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
98002	165.7 to 172.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
98003	181.3 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
98012	192.2 to 214.8 feet	Key Note Segment		5 ft	113			
98004	219.8 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
98013	227.5 to 242.0 feet	Key Note Segment		5 ft	73			
98005	242.0 to 243.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
98006	245.3 to 249.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
97991	252.4 to 253.4 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
98007	259.8 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98008	266.7 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131354	RIVERVIEW DR	IMPERIAL DR	N SCHNOOR AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: S	*side of* **RIVERVIEW DR**	*Starting at:* **IMPERIAL DR**						**$57,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131349	RIVERVIEW DR	MAINBERRY DR	SHANNON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97930	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
97931	7.4 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,300**
97953	19.2 to 42.1 feet	Key Note Segment		5 ft	115			
97919	20.1 to 21.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
97920	27.6 to 28.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
97921	29.3 to 30.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
97932	42.3 to 43.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
97933	43.6 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
97923	49.5 to 50.5 feet	**Vertical Change**	2.01"	5 ft	5	REF		
97934	80.8 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
97954	87.8 to 102.0 feet	Key Note Segment		5 ft	71			
97935	105.8 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
97955	114.1 to 128.8 feet	Key Note Segment		5 ft	74			
97924	122.2 to 123.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
97936	138.8 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
97937	164.8 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97956	194.9 to 210.3 feet	Key Note Segment		5 ft	77			
97925	222.7 to 223.7 feet	**Vertical Change**	2.07"	5 ft	5	SF	$75	**$375**
97957	231.3 to 245.1 feet	Key Note Segment		5 ft	69			
97938	250.7 to 253.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97939	261.6 to 285.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,340**
97940	294.6 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
97941	309.3 to 311.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
97958	311.0 to 324.8 feet	Key Note Segment		5 ft	69			
97942	324.8 to 343.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	92	SF	$40	**$3,680**
97959	343.2 to 357.0 feet	Key Note Segment		5 ft	69			
97943	363.3 to 380.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
97926	413.5 to 414.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131349	RIVERVIEW DR	MAINBERRY DR	SHANNON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97944	416.9 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
97960	423.1 to 437.2 feet	Key Note Segment		5 ft	71			
97945	439.8 to 451.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
97961	452.8 to 466.3 feet	Key Note Segment		5 ft	68			
97946	466.6 to 475.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
97947	479.2 to 509.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
97927	486.1 to 487.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
97948	512.7 to 531.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
97962	537.3 to 551.9 feet	Key Note Segment		5 ft	73			
97949	555.1 to 564.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
97963	564.8 to 579.8 feet	Key Note Segment		5 ft	75			
97928	573.3 to 574.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
97950	584.8 to 585.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
97929	591.1 to 592.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
97951	591.6 to 594.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
97952	599.8 to 611.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **MAINBERRY DR** **$145,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160952	RIVERVIEW DR	MONOCOTT DR	GRANADA DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69846	5.1 to 6.1 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
69869	9.8 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,140
69937	20.3 to 33.7 feet	Key Note Segment		5 ft	67			
69847	21.6 to 22.6 feet	Vertical Change	-.27"	5 ft	5	REF		
69870	36.4 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
69871	40.8 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
69938	48.1 to 60.9 feet	Key Note Segment		5 ft	64			
69872	66.3 to 100.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	171	SF	$120	$20,460
69939	101.3 to 114.8 feet	Key Note Segment		5 ft	68			
69873	120.5 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	$14,760
69874	147.8 to 151.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
69848	148.7 to 149.7 feet	Vertical Change	2.42"	5 ft	5	REF		
69875	151.8 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
69849	152.3 to 153.3 feet	Vertical Change	.26"	5 ft	5	REF		
69940	153.3 to 167.4 feet	Key Note Segment		5 ft	70			
69876	167.4 to 202.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	174	SF	$40	$6,960
69877	211.0 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
69878	217.0 to 231.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	$8,760
69941	231.6 to 244.4 feet	Key Note Segment		5 ft	64			
69879	245.9 to 247.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
69880	251.1 to 262.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
69881	262.3 to 263.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
69942	265.3 to 278.8 feet	Key Note Segment		5 ft	68			
69882	278.8 to 301.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	113	SF	$40	$4,500
69883	302.2 to 307.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
69884	308.3 to 326.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	$10,980
69885	328.9 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
69850	329.6 to 330.6 feet	Vertical Change	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160952	RIVERVIEW DR	MONOCOTT DR	GRANADA DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69886	334.8 to 337.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
69943	339.8 to 353.2 feet	Key Note Segment		5 ft	67			
69887	354.2 to 355.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
69851	354.6 to 355.6 feet	**Vertical Change**	.63"	5 ft	5	REF		
69888	355.5 to 356.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
69889	363.6 to 367.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
69890	370.7 to 372.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
69944	372.0 to 386.3 feet	Key Note Segment		5 ft	72			
69891	391.2 to 393.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
69892	397.4 to 408.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
69893	408.9 to 411.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
69852	415.1 to 416.1 feet	**Vertical Change**	-1.26"	5 ft	5	SF	$75	**$375**
69945	419.5 to 434.2 feet	Key Note Segment		5 ft	74			
69894	437.8 to 454.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,960**
69895	454.4 to 456.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
69896	459.3 to 460.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
69853	468.3 to 469.3 feet	**Vertical Change**	-1.42"	5 ft	5	REF		
69897	469.0 to 485.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
69898	485.3 to 492.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
69946	493.7 to 507.8 feet	Key Note Segment		5 ft	71			
69899	509.3 to 519.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
69900	522.6 to 528.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
69901	528.8 to 537.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
69902	542.6 to 547.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
69947	547.6 to 561.5 feet	Key Note Segment		5 ft	70			
69854	556.0 to 557.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
69903	562.5 to 563.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
69904	563.7 to 569.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160952	RIVERVIEW DR	MONOCOTT DR	GRANADA DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69855	564.0 to 565.0 feet	Vertical Change	3.4"	5 ft	5	REF		
69905	580.8 to 581.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69948	582.8 to 596.7 feet	Key Note Segment		5 ft	70			
69906	597.7 to 601.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
69907	605.1 to 613.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,220**
69908	613.8 to 649.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,600**
69856	625.6 to 626.6 feet	Vertical Change	-.28"	5 ft	5	REF		
69949	650.8 to 664.9 feet	Key Note Segment		5 ft	71			
69909	665.7 to 668.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69857	679.3 to 680.3 feet	Vertical Change	-2.92"	5 ft	5	REF		
69910	679.7 to 681.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
69950	685.5 to 699.7 feet	Key Note Segment		5 ft	71			
69911	699.7 to 707.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	40	SF	$40	**$1,580**
69912	707.6 to 718.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
69858	732.6 to 733.6 feet	Vertical Change	-1.5"	5 ft	5	SF	$75	**$375**
69913	736.5 to 738.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69951	738.6 to 755.2 feet	Key Note Segment		5 ft	83			
69859	743.2 to 744.2 feet	Vertical Change	.78"	5 ft	5	REF		
69914	757.2 to 758.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
69915	759.2 to 761.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
69916	761.3 to 770.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
69917	770.8 to 787.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
69860	787.3 to 788.3 feet	Vertical Change	-.59"	5 ft	5	REF		
69918	787.7 to 802.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
69952	803.4 to 818.6 feet	Key Note Segment		5 ft	76			
69919	819.8 to 826.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
69920	828.5 to 842.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
69921	844.8 to 848.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160952	RIVERVIEW DR	MONOCOTT DR	GRANADA DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69861	847.1 to 848.1 feet	Vertical Change	-.37"	5 ft	5	REF		
69922	849.7 to 853.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
69923	855.8 to 863.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
69862	860.8 to 861.8 feet	Vertical Change	-.28"	5 ft	5	REF		
69924	868.5 to 873.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
69953	873.6 to 886.8 feet	Key Note Segment		5 ft	66			
69925	887.8 to 896.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
69863	888.5 to 889.5 feet	Vertical Change	.99"	5 ft	5	REF		
69926	904.5 to 906.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
69864	905.5 to 906.5 feet	Vertical Change	1.49"	5 ft	5	REF		
69927	906.8 to 911.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
69928	915.2 to 918.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
69954	918.8 to 932.7 feet	Key Note Segment		5 ft	70			
69865	920.6 to 921.6 feet	Vertical Change	-.46"	5 ft	5	REF		
69929	934.0 to 953.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	$11,880
69930	956.4 to 960.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
69931	962.6 to 966.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,220
69955	966.3 to 980.6 feet	Key Note Segment		5 ft	72			
69866	973.1 to 974.1 feet	Vertical Change	3.3"	5 ft	5	REF		
69932	981.4 to 982.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$260
69867	982.0 to 983.0 feet	Vertical Change	.34"	5 ft	5	REF		
69933	985.3 to 996.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	$6,900
69868	996.4 to 997.4 feet	Vertical Change	.36"	5 ft	5	REF		
69934	997.2 to 1007.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	$6,300
69935	1007.7 to 1016.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
69936	1017.0 to 1026.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	$5,520

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **MONOCOTT DR** **$305,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131626	RIVERVIEW DR	N GRANADA DR	VALLEY WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99830	0.0 to 8.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,220**
99831	9.3 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
99854	19.4 to 33.9 feet	Key Note Segment		5 ft	73			
99855	37.9 to 51.3 feet	Key Note Segment		5 ft	67			
99832	56.3 to 58.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
99833	59.7 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
99821	68.8 to 69.8 feet	Vertical Change	1.81"	5 ft	5	REF		
99834	69.7 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
99835	85.9 to 87.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
99836	91.3 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
99822	100.8 to 101.8 feet	Vertical Change	-.84"	5 ft	5	SF	$75	**$375**
99837	101.9 to 103.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
99856	103.3 to 118.5 feet	Key Note Segment		5 ft	76			
99838	118.5 to 126.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	42	SF	$40	**$1,680**
99823	118.8 to 119.8 feet	Vertical Change	.3"	5 ft	5	REF		
99839	126.9 to 133.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
99840	133.1 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
99841	136.6 to 137.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
99842	140.3 to 142.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
99843	142.6 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
99844	151.5 to 156.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
99857	156.8 to 190.5 feet	Key Note Segment		5 ft	168			
99824	180.5 to 181.5 feet	Vertical Change	-.4"	5 ft	5	REF		
99845	195.6 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
99846	211.8 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99858	220.2 to 232.5 feet	Key Note Segment		5 ft	62			
99825	220.8 to 221.8 feet	Vertical Change	-.35"	5 ft	5	REF		
99826	234.5 to 235.5 feet	Vertical Change	-.52"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131626	RIVERVIEW DR	N GRANADA DR	VALLEY WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99847	236.1 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99859	238.5 to 251.3 feet	Key Note Segment		5 ft	64			
99827	244.6 to 245.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
99828	258.9 to 259.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
99848	275.3 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
99849	280.8 to 294.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
99850	297.4 to 299.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
99860	299.3 to 312.0 feet	Key Note Segment		5 ft	64			
99851	313.9 to 316.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
99861	316.8 to 329.5 feet	Key Note Segment		5 ft	64			
99852	341.6 to 349.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
99829	351.1 to 352.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
99853	354.5 to 361.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
99862	359.0 to 360.9 feet		6.0-7.0%	5 ft	10			

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **N GRANADA DR** **$79,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131610	RIVERVIEW DR	N SCHNOOR AVE	RIVER POINTE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99655	0.4 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
99656	7.3 to 20.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
99657	25.0 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,180**
99658	39.5 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
99659	46.3 to 58.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
99650	56.0 to 57.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
99660	62.0 to 63.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
99661	63.8 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
99662	67.8 to 76.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
99663	79.4 to 88.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
99664	90.6 to 101.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
99665	104.5 to 116.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
99651	104.7 to 105.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
99666	116.3 to 118.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
99652	117.2 to 118.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
99667	118.7 to 128.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
99668	129.1 to 132.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
99669	133.7 to 157.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	119	SF	$120	**$14,280**
99670	159.8 to 161.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
99671	161.9 to 166.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
99672	166.8 to 215.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	246	SF	$120	**$29,460**
99673	216.8 to 229.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
99674	229.3 to 246.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	85	SF	$120	**$10,200**
99653	242.1 to 243.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
99675	250.3 to 251.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
99676	252.8 to 254.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
99677	256.8 to 281.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	122	SF	$120	**$14,640**
99678	278.3 to 281.2 feet		5.0-6.0%	5 ft	15			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131610	RIVERVIEW DR	N SCHNOOR AVE	RIVER POINTE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99679	278.3 to 281.2 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
99654	281.2 to 282.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **RIVERVIEW DR** *Starting at:* **N SCHNOOR AVE** **$145,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141058	RIVERVIEW DR	ORCHARD AVE	CENTRAL PL	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101269	1.7 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
101316	3.1 to 12.5 feet	Key Note Segment		3 ft	28			
101270	12.6 to 14.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**
101271	14.8 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$864**
101253	18.5 to 19.5 feet	**Vertical Change**	.34"	3 ft	3	LF	$75	**$225**
101272	21.3 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	**$2,160**
101273	27.3 to 33.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	20	SF	$120	**$2,376**
101254	37.4 to 38.4 feet	**Vertical Change**	-.45"	3 ft	3	LF	$75	**$225**
101274	39.9 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	13	SF	$120	**$1,584**
101275	47.8 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101276	50.6 to 51.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$360**
101277	52.4 to 53.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$540**
101317	55.1 to 70.3 feet	Key Note Segment		3 ft	46			
101255	65.7 to 66.7 feet	**Vertical Change**	-.27"	3 ft	3	REF		
101278	70.8 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	20	SF	$120	**$2,340**
101279	77.3 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,088**
101318	83.1 to 97.5 feet	Key Note Segment		3 ft	43			
101256	98.3 to 99.3 feet	**Vertical Change**	.34"	3 ft	3	REF		
101280	105.7 to 109.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	12	SF	$120	**$1,476**
101281	110.8 to 113.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$972**
101257	110.9 to 111.9 feet	**Vertical Change**	.39"	3 ft	3	REF		
101282	114.7 to 123.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	27	SF	$120	**$3,240**
101283	130.3 to 138.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	23	SF	$120	**$2,808**
101284	138.1 to 139.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
101285	142.0 to 143.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101319	145.4 to 153.9 feet	Key Note Segment		3 ft	26			
101259	155.5 to 156.5 feet	**Vertical Change**	.32"	3 ft	3	LF	$75	**$225**
101286	160.4 to 163.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$936**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141058	RIVERVIEW DR	ORCHARD AVE	CENTRAL PL	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101287	166.0 to 171.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	18	SF	$120	**$2,124**
101288	175.7 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$756**
101289	177.8 to 179.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$540**
101290	185.6 to 192.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	20	SF	$120	**$2,340**
101320	192.4 to 206.8 feet	Key Note Segment		3 ft	43			
101260	193.7 to 194.7 feet	**Vertical Change**	-.27"	3 ft	3	REF		
101291	208.6 to 212.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	13	SF	$120	**$1,512**
101292	215.8 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
101293	217.7 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$828**
101261	221.5 to 222.5 feet	**Vertical Change**	.26"	3 ft	3	LF	$75	**$225**
101294	223.5 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
101321	224.9 to 244.1 feet	Key Note Segment		3 ft	58			
101295	244.5 to 246.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	7	SF	$40	**$276**
101262	245.4 to 246.4 feet	**Vertical Change**	.29"	3 ft	3	REF		
101296	248.9 to 250.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$504**
101297	252.4 to 259.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	21	SF	$120	**$2,484**
101263	257.5 to 258.5 feet	**Vertical Change**	-.32"	3 ft	3	REF		
101298	263.8 to 264.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101299	268.9 to 269.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101300	275.8 to 276.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101301	279.3 to 281.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$792**
101302	285.6 to 289.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	12	SF	$120	**$1,476**
101303	291.9 to 295.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	**$1,332**
101264	293.1 to 294.1 feet	**Vertical Change**	.43"	3 ft	3	LF	$75	**$225**
101304	299.8 to 310.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	33	SF	$120	**$3,996**
101305	312.9 to 316.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	**$1,404**
101306	316.8 to 319.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$900**
101265	321.4 to 322.4 feet	**Vertical Change**	.29"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141058	RIVERVIEW DR	ORCHARD AVE	CENTRAL PL	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101307	322.1 to 323.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101322	323.2 to 333.9 feet	Key Note Segment		3 ft	32			
101308	334.3 to 346.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	3 ft	36	SF	$40	**$1,440**
101266	334.6 to 335.6 feet	**Vertical Change**	.42"	3 ft	3	REF		
101267	343.9 to 344.9 feet	**Vertical Change**	-.38"	3 ft	3	REF		
101309	353.6 to 360.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	22	SF	$120	**$2,592**
101310	361.6 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
101311	366.8 to 369.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	**$792**
101312	376.2 to 382.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	18	SF	$120	**$2,196**
101313	384.8 to 389.2 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	13	SF	$120	**$1,584**
101314	390.8 to 394.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	11	SF	$120	**$1,260**
101315	396.6 to 399.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,080**
101323	399.9 to 401.4 feet		5.0-6.0%	3 ft	5			
101268	401.1 to 402.1 feet	**Vertical Change**	.27"	3 ft	3	LF	$75	**$225**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **ORCHARD AVE** **$60,918.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160738	RIVERVIEW DR	PAINTBRUSH DR	WOLFTRAP CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68208	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68187	2.4 to 3.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
68188	27.8 to 28.8 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
68189	33.4 to 34.4 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
68191	45.4 to 46.4 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**
68192	48.6 to 49.6 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$375**
68193	51.9 to 52.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
68194	59.3 to 60.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
68234	70.8 to 79.3 feet	Key Note Segment		5 ft	43			
68209	81.0 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
68235	102.6 to 126.9 feet	Key Note Segment		5 ft	122			
68210	128.3 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
68195	137.8 to 138.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
68211	141.2 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
68212	152.2 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
68213	159.4 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68214	166.1 to 173.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
68215	175.2 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
68236	177.7 to 201.8 feet	Key Note Segment		5 ft	121			
68197	179.7 to 180.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
68216	203.1 to 204.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
68198	204.1 to 205.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
68217	204.8 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
68218	215.9 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
68199	222.0 to 223.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
68219	232.8 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68200	236.8 to 237.8 feet	**Vertical Change**	-.45"	5 ft	5	REF		
68220	237.7 to 243.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160738	RIVERVIEW DR	PAINTBRUSH DR	WOLFTRAP CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68237	244.8 to 268.4 feet	Key Note Segment		5 ft	118			
68201	247.0 to 248.0 feet	Vertical Change	.28"	5 ft	5	REF		
68221	269.8 to 271.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
68202	270.0 to 271.0 feet	Vertical Change	-.34"	5 ft	5	REF		
68222	273.2 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
68223	286.0 to 292.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
68203	290.5 to 291.5 feet	Vertical Change	-.26"	5 ft	5	REF		
68224	293.1 to 306.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
68238	306.6 to 330.0 feet	Key Note Segment		5 ft	117			
68204	308.2 to 309.2 feet	Vertical Change	-.37"	5 ft	5	REF		
68205	314.8 to 315.8 feet	Vertical Change	.3"	5 ft	5	REF		
68225	330.6 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
68226	336.7 to 340.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
68227	342.8 to 352.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
68206	343.1 to 344.1 feet	Vertical Change	.36"	5 ft	5	REF		
68228	355.5 to 357.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
68229	358.6 to 368.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
68207	368.2 to 369.2 feet	Vertical Change	-.3"	5 ft	5	REF		
68230	368.3 to 384.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
68231	389.7 to 417.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
68232	422.0 to 432.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
68233	434.9 to 456.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,140**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **PAINTBRUSH DR** **$108,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131345	RIVERVIEW DR	PRIVATE	MAINBERRY DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97908	0.0 to 15.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
97909	15.4 to 17.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
97910	17.6 to 21.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,100**
97911	21.4 to 32.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
97912	33.9 to 58.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	123	SF	$120	**$14,700**
97913	58.4 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
97914	71.5 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
97915	76.7 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
97916	81.3 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
97906	81.9 to 82.9 feet	**Vertical Change**	-.68"	5 ft	5	REF		
97917	84.0 to 96.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	62	SF	$120	**$7,440**
97918	96.8 to 100.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
97907	97.1 to 98.1 feet	**Vertical Change**	-.43"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **PRIVATE** **$56,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131619	RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99727	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
99692	4.8 to 5.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
99728	6.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
99796	11.3 to 34.8 feet	Key Note Segment		5 ft	117			
99729	39.8 to 41.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
99730	44.8 to 61.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
99731	63.8 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
99797	73.8 to 88.0 feet	Key Note Segment		5 ft	71			
99732	93.1 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
99733	99.1 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
99798	103.8 to 127.1 feet	Key Note Segment		5 ft	117			
99734	127.1 to 141.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	74	SF	$40	**$2,960**
99735	144.3 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
99736	152.8 to 155.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
99737	157.6 to 159.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
99738	159.1 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
99799	182.8 to 197.3 feet	Key Note Segment		5 ft	73			
99693	191.1 to 192.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
99739	197.3 to 198.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
99740	202.3 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
99741	208.6 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
99800	213.3 to 227.3 feet	Key Note Segment		5 ft	70			
99742	227.7 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
99695	227.9 to 228.9 feet	**Vertical Change**	-.46"	5 ft	5	REF		
99743	250.0 to 254.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
99696	255.3 to 256.3 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
99744	261.6 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
99745	265.8 to 271.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131619	RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99746	273.2 to 290.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
99801	290.2 to 304.5 feet	Key Note Segment		5 ft	72			
99747	304.5 to 331.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	134	SF	$40	**$5,360**
99748	334.1 to 344.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
99802	344.2 to 360.0 feet	Key Note Segment		5 ft	79			
99817	369.1 to 370.3 feet		5.0-6.0%	5 ft	6			
99749	370.0 to 378.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
99697	372.5 to 373.5 feet	**Vertical Change**	.74"	5 ft	5	SF	$75	**$375**
99803	378.1 to 392.6 feet	Key Note Segment		5 ft	73			
99698	379.1 to 380.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
99750	392.6 to 394.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
99699	392.9 to 393.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
99751	397.5 to 401.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
99752	410.3 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
99753	425.8 to 429.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
99804	434.2 to 448.5 feet	Key Note Segment		5 ft	72			
99754	452.1 to 471.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
99700	462.3 to 463.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
99755	480.3 to 485.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
99805	488.2 to 502.0 feet	Key Note Segment		5 ft	69			
99701	495.8 to 496.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
99756	502.0 to 504.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
99757	511.3 to 515.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
99758	544.5 to 551.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
99702	552.3 to 553.3 feet	**Vertical Change**	1.37"	5 ft	5	SF	$75	**$375**
99759	555.3 to 557.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
99703	559.1 to 560.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
99806	564.5 to 579.7 feet	Key Note Segment		5 ft	76			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131619	RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99704	565.1 to 566.1 feet	Vertical Change	.35"	5 ft	5	REF		
99705	572.5 to 573.5 feet	Vertical Change	.36"	5 ft	5	REF		
99760	579.8 to 582.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$560
99761	590.5 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
99762	600.1 to 621.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,660
99807	621.2 to 635.7 feet	Key Note Segment		5 ft	73			
99763	637.6 to 643.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
99764	643.9 to 654.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
99707	647.4 to 648.4 feet	Vertical Change	.26"	5 ft	5	REF		
99765	658.4 to 660.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
99766	663.0 to 664.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
99808	674.4 to 688.8 feet	Key Note Segment		5 ft	72			
99767	688.8 to 691.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	$580
99768	692.8 to 699.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
99769	702.2 to 707.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
99770	716.5 to 717.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
99809	729.3 to 744.0 feet	Key Note Segment		5 ft	74			
99771	744.0 to 762.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	95	SF	$40	$3,780
99810	762.9 to 786.0 feet	Key Note Segment		5 ft	116			
99708	770.2 to 771.2 feet	Vertical Change	.32"	5 ft	5	REF		
99709	779.1 to 780.1 feet	Vertical Change	.37"	5 ft	5	REF		
99772	786.0 to 787.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	$360
99710	786.7 to 787.7 feet	Vertical Change	.55"	5 ft	5	REF		
99711	789.1 to 790.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
99712	793.5 to 794.5 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
99713	795.4 to 796.4 feet	Vertical Change	-.43"	5 ft	5	LF	$75	$375
99773	808.9 to 815.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
99811	815.7 to 829.3 feet	Key Note Segment		5 ft	68			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131619	RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99714	815.9 to 816.9 feet	Vertical Change	-.36"	5 ft	5	REF		
99715	823.0 to 824.0 feet	Vertical Change	-.26"	5 ft	5	REF		
99774	829.9 to 837.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
99716	833.4 to 834.4 feet	Vertical Change	.27"	5 ft	5	REF		
99775	846.2 to 849.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
99776	855.7 to 859.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
99812	873.7 to 886.8 feet	Key Note Segment		5 ft	66			
99777	907.8 to 909.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
99778	909.8 to 911.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
99779	917.0 to 922.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
99780	922.9 to 928.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
99781	929.8 to 944.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
99782	944.5 to 954.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
99813	954.1 to 968.5 feet	Key Note Segment		5 ft	72			
99717	962.1 to 963.1 feet	Vertical Change	.4"	5 ft	5	REF		
99783	968.6 to 971.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
99784	972.8 to 980.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
99814	981.1 to 995.9 feet	Key Note Segment		5 ft	74			
99718	989.7 to 990.7 feet	Vertical Change	.5"	5 ft	5	REF		
99785	997.1 to 1000.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
99786	1001.0 to 1008.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
99719	1004.8 to 1005.8 feet	Vertical Change	.45"	5 ft	5	REF		
99787	1008.3 to 1009.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
99720	1014.1 to 1015.1 feet	Vertical Change	.7"	5 ft	5	SF	$75	**$375**
99788	1015.7 to 1020.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
99789	1021.3 to 1049.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
99721	1037.2 to 1038.2 feet	Vertical Change	.32"	5 ft	5	REF		
99722	1041.7 to 1042.7 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131619	RIVERVIEW DR	RIVER POINTE	2340 RIVERVIEW DR	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99818	1043.7 to 1046.5 feet		6.0-7.0%	5 ft	14			
99819	1043.7 to 1046.5 feet	Running Slope	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
99815	1049.1 to 1063.9 feet	Key Note Segment		5 ft	74			
99790	1064.2 to 1066.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	**$540**
99723	1064.8 to 1065.8 feet	Vertical Change	.35"	5 ft	5	REF		
99791	1070.9 to 1073.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
99820	1081.1 to 1082.3 feet		5.0-6.0%	5 ft	6			
99724	1082.6 to 1083.6 feet	Vertical Change	1.72"	5 ft	5	SF	$75	**$375**
99792	1086.5 to 1090.9 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	22	SF	$120	**$2,640**
99725	1091.4 to 1092.4 feet	Vertical Change	-.36"	5 ft	5	LF	$75	**$375**
99793	1095.4 to 1103.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
99794	1105.1 to 1111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
99816	1111.4 to 1150.4 feet	Key Note Segment		5 ft	195			
99795	1150.6 to 1154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
99726	1154.7 to 1155.7 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **RIVERVIEW DR** *Starting at:* **RIVER POINTE** **$255,485.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201140954	RIVERVIEW DR	SCHNOOR AVE	ORCHARD AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100259	0.6 to 1.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
100260	3.8 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
100261	7.7 to 13.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	**$1,944**
100262	15.5 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	**$1,980**
100263	21.0 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	19	SF	$120	**$2,268**
100264	31.8 to 36.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	14	SF	$120	**$1,692**
100243	34.3 to 35.3 feet	**Vertical Change**	.27"	3 ft	3	REF		
100337	37.3 to 38.6 feet		6.0-7.0%	3 ft	4			
100265	40.5 to 41.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
100266	44.4 to 56.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	36	SF	$120	**$4,320**
100267	59.1 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
100268	73.3 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
100269	79.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,116**
100270	88.4 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
100271	89.8 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$900**
100272	94.8 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	15	SF	$120	**$1,836**
100330	99.9 to 127.4 feet	Key Note Segment		3 ft	83			
100273	127.4 to 135.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	24	SF	$40	**$948**
100274	141.4 to 149.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	24	SF	$120	**$2,844**
100275	156.5 to 158.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$648**
100276	161.1 to 165.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	14	SF	$120	**$1,692**
100277	168.7 to 170.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
100278	172.4 to 179.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	20	SF	$120	**$2,376**
100279	181.1 to 184.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,152**
100280	187.4 to 193.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,016**
100281	195.3 to 199.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,656**
100282	202.4 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	25	SF	$120	**$3,024**
100283	216.3 to 219.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,116**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201140954	RIVERVIEW DR	SCHNOOR AVE	ORCHARD AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100284	228.8 to 230.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
100285	232.0 to 234.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$792**
100331	234.2 to 249.3 feet	Key Note Segment		3 ft	45			
100244	235.0 to 236.0 feet	**Vertical Change**	-.47"	3 ft	3	REF		
100245	249.6 to 250.6 feet	**Vertical Change**	.54"	3 ft	3	REF		
100286	250.4 to 251.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
100287	251.5 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
100332	258.5 to 272.9 feet	Key Note Segment		3 ft	43			
100246	259.8 to 260.8 feet	**Vertical Change**	-.62"	3 ft	3	REF		
100288	273.7 to 275.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
100289	293.3 to 299.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	18	SF	$120	**$2,196**
100247	296.4 to 297.4 feet	**Vertical Change**	.35"	3 ft	3	REF		
100290	307.1 to 309.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$828**
100291	311.6 to 313.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$756**
100292	315.9 to 316.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
100293	318.4 to 321.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,188**
100294	324.2 to 331.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	21	SF	$120	**$2,556**
100295	336.5 to 337.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
100296	343.3 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
100297	350.6 to 352.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$540**
100248	354.0 to 355.0 feet	**Vertical Change**	.29"	3 ft	3	REF		
100298	354.5 to 355.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**
100299	355.9 to 357.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
100249	360.1 to 361.1 feet	**Vertical Change**	-.44"	3 ft	3	LF	$75	**$225**
100300	365.7 to 367.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$648**
100333	371.4 to 386.0 feet	Key Note Segment		3 ft	44			
100250	372.1 to 373.1 feet	**Vertical Change**	.49"	3 ft	3	REF		
100301	387.4 to 391.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201140954	RIVERVIEW DR	SCHNOOR AVE	ORCHARD AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100302	395.0 to 397.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$828**
100334	397.6 to 412.3 feet	Key Note Segment		3 ft	44			
100251	425.5 to 426.5 feet	**Vertical Change**	.36"	3 ft	3	LF	$75	**$225**
100252	430.7 to 436.3 feet	**Vertical Change**	.27"	3 ft	17	LF	$75	**$1,260**
100253	438.9 to 439.9 feet	**Vertical Change**	.43"	3 ft	3	LF	$75	**$225**
100254	440.6 to 441.6 feet	**Vertical Change**	-.38"	3 ft	3	LF	$75	**$225**
100303	450.8 to 453.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,116**
100304	463.4 to 464.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
100305	466.7 to 468.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$756**
100306	482.3 to 487.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	16	SF	$120	**$1,944**
100255	483.1 to 484.1 feet	**Vertical Change**	.48"	3 ft	3	REF		
100307	498.6 to 508.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	30	SF	$120	**$3,636**
100335	508.8 to 523.3 feet	Key Note Segment		3 ft	43			
100308	523.6 to 529.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	**$2,196**
100309	529.7 to 534.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	15	SF	$120	**$1,836**
100336	536.0 to 549.3 feet	Key Note Segment		3 ft	40			
100310	549.8 to 551.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
100311	557.6 to 559.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	7	SF	$120	**$792**
100312	560.5 to 566.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	17	SF	$120	**$2,016**
100313	568.8 to 572.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	10	SF	$120	**$1,152**
100314	574.2 to 577.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	11	SF	$120	**$1,332**
100315	578.7 to 583.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	16	SF	$120	**$1,872**
100316	586.2 to 599.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	40	SF	$120	**$4,752**
100256	597.8 to 598.8 feet	**Vertical Change**	-.27"	3 ft	3	REF		
100317	601.4 to 604.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,044**
100318	607.3 to 612.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,692**
100319	614.5 to 616.1 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
100320	618.2 to 624.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	20	SF	$120	**$2,412**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201140954	RIVERVIEW DR	SCHNOOR AVE	ORCHARD AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100321	631.8 to 635.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	11	SF	$120	**$1,368**
100322	637.3 to 643.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	**$2,124**
100257	643.2 to 644.2 feet	**Vertical Change**	-.32"	3 ft	3	REF		
100323	645.3 to 653.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	24	SF	$120	**$2,880**
100324	653.8 to 666.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	38	SF	$120	**$4,500**
100258	656.1 to 657.1 feet	**Vertical Change**	-.44"	3 ft	3	REF		
100325	668.6 to 669.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
100326	677.3 to 678.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$432**
100327	681.5 to 682.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
100328	685.7 to 686.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$432**
100329	694.8 to 699.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **SCHNOOR AVE** **$98,868.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131351	RIVERVIEW DR	SHANNON AVE	IMPERIAL DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97975	0.0 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
97976	11.2 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
97964	30.1 to 31.1 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
97977	35.6 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
97965	59.8 to 60.8 feet	**Vertical Change**	1.36"	5 ft	5	REF		
97978	59.8 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
97966	93.2 to 94.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
97967	103.5 to 104.5 feet	**Vertical Change**	1.72"	5 ft	5	SF	$75	**$375**
97979	110.8 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
97968	112.2 to 113.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
97969	113.9 to 114.9 feet	**Vertical Change**	-.55"	5 ft	5	SF	$75	**$375**
97970	117.6 to 118.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
97980	119.5 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
97981	120.8 to 122.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97971	123.8 to 124.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
97982	125.9 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97972	126.6 to 127.6 feet	**Vertical Change**	-.86"	5 ft	5	REF		
97973	136.0 to 137.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
97983	139.1 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
97974	141.8 to 142.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		
97984	155.8 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
97985	165.0 to 166.4 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **SHANNON AVE** **$62,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170800	RIVERVIEW DR	SUBURBAN AVE	PAINTBRUSH DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71078	0.7 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
71079	13.9 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
71080	21.6 to 24.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
71081	27.0 to 59.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,680**
71082	61.2 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71083	66.6 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
71084	78.5 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71085	82.8 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
71096	88.6 to 104.9 feet	Key Note Segment		5 ft	82			
71077	106.3 to 107.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
71086	107.4 to 126.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
71087	131.6 to 138.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
71088	139.1 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71089	141.5 to 151.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
71097	151.7 to 174.2 feet	Key Note Segment		5 ft	113			
71090	179.5 to 191.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
71091	191.0 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
71092	197.1 to 201.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
71098	202.1 to 225.5 feet	Key Note Segment		5 ft	117			
71093	226.5 to 230.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
71094	235.0 to 241.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
71095	249.1 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **SUBURBAN AVE** **$84,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170747	RIVERVIEW DR	SUMMER SET LN	WESTBERRY BVD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70890	0.4 to 2.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
70891	3.5 to 27.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
70892	32.2 to 39.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
70875	32.7 to 33.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
70893	46.5 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
70894	57.6 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
70876	58.1 to 59.1 feet	**Vertical Change**	.67"	5 ft	5	REF		
70945	64.1 to 90.8 feet	Key Note Segment		5 ft	134			
70877	65.3 to 66.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
70895	90.8 to 93.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$620**
70896	114.3 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
70958	120.7 to 121.7 feet	**Protruding Object**	65"	5 ft	5	JOB	$99	**$99**
70946	128.3 to 153.4 feet	Key Note Segment		5 ft	125			
70878	128.7 to 129.7 feet	**Vertical Change**	-.42"	5 ft	5	REF		
70879	148.4 to 149.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
70897	153.4 to 157.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$880**
70898	160.1 to 162.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
70899	163.1 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
70900	175.7 to 179.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
70901	183.6 to 191.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
70902	191.8 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
70947	203.0 to 227.2 feet	Key Note Segment		5 ft	121			
70903	227.2 to 230.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
70904	236.0 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**
70948	265.8 to 289.3 feet	Key Note Segment		5 ft	118			
70880	276.4 to 277.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
70905	290.3 to 318.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
70906	318.9 to 329.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170747	RIVERVIEW DR	SUMMER SET LN	WESTBERRY BVD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70907	329.5 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
70949	334.0 to 359.3 feet	Key Note Segment		5 ft	127			
70908	361.1 to 397.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,660**
70909	397.8 to 401.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
70910	401.8 to 402.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
70950	404.1 to 436.4 feet	Key Note Segment		5 ft	162			
70881	405.1 to 406.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70882	423.9 to 424.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
70911	436.4 to 446.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,100**
70912	449.1 to 454.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
70913	459.5 to 467.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
70951	467.9 to 491.4 feet	Key Note Segment		5 ft	118			
70884	485.5 to 486.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
70914	491.4 to 502.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	56	SF	$40	**$2,240**
70915	505.3 to 518.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
70916	520.0 to 528.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
70917	528.6 to 533.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
70952	534.3 to 559.3 feet	Key Note Segment		5 ft	125			
70918	561.3 to 578.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	**$10,500**
70919	578.8 to 583.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
70920	584.6 to 603.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
70953	603.7 to 627.5 feet	Key Note Segment		5 ft	119			
70921	627.5 to 661.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	168	SF	$40	**$6,720**
70922	667.2 to 669.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
70954	670.5 to 696.0 feet	Key Note Segment		5 ft	128			
70923	696.0 to 703.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	39	SF	$40	**$1,540**
70924	705.0 to 716.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
70925	719.3 to 729.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170747	RIVERVIEW DR	SUMMER SET LN	WESTBERRY BVD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70926	734.4 to 738.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
70955	738.8 to 762.6 feet	Key Note Segment		5 ft	119			
70885	740.6 to 741.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
70927	763.5 to 772.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
70928	772.6 to 778.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
70929	780.9 to 787.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
70930	792.0 to 796.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
70886	792.9 to 793.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
70931	803.1 to 804.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
70956	807.4 to 830.8 feet	Key Note Segment		5 ft	117			
70932	831.0 to 844.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	69	SF	$40	**$2,760**
70887	832.2 to 833.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
70933	844.8 to 845.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
70934	848.7 to 855.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
70888	854.0 to 855.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
70935	858.0 to 864.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
70936	866.2 to 869.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
70889	866.4 to 867.4 feet	**Vertical Change**	-.4"	5 ft	5	REF		
70937	871.8 to 874.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
70957	875.5 to 911.1 feet	Key Note Segment		5 ft	178			
70938	912.5 to 913.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
70939	913.8 to 916.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
70940	921.1 to 926.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
70941	931.3 to 934.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
70942	938.2 to 939.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70943	943.8 to 954.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
70944	954.7 to 955.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **SUMMER SET LN** **$243,159.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131341	RIVERVIEW DR	VALLEY WAY	2300 RIVERVIEW DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97873	0.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
97874	7.7 to 12.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
97875	13.8 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
97876	19.8 to 36.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
97867	23.8 to 24.8 feet	**Vertical Change**	2.19"	5 ft	5	REF		
97877	37.7 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
97878	45.0 to 63.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
97879	63.7 to 69.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
97880	71.4 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,140**
97881	84.6 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
97882	89.3 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
97883	99.3 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
97898	101.8 to 124.2 feet	Key Note Segment		5 ft	112			
97884	129.2 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
97899	144.8 to 160.2 feet	Key Note Segment		5 ft	77			
97885	160.2 to 171.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	59	SF	$40	**$2,340**
97868	169.1 to 170.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
97900	171.9 to 190.8 feet	Key Note Segment		5 ft	95			
97869	183.8 to 184.8 feet	**Vertical Change**	.8"	5 ft	5	REF		
97886	193.0 to 212.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
97887	221.6 to 241.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
97888	245.0 to 249.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
97889	252.5 to 259.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
97890	261.8 to 276.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
97891	293.3 to 301.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
97892	304.8 to 316.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
97893	317.2 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
97870	317.9 to 318.9 feet	**Vertical Change**	-.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131341	RIVERVIEW DR	VALLEY WAY	2300 RIVERVIEW DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97894	321.3 to 329.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
97871	326.2 to 327.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
97895	332.4 to 334.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	10	SF	$120	**$1,200**
97896	334.4 to 335.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
97897	336.0 to 343.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
97872	344.1 to 345.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **VALLEY WAY** **$129,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2201141143	RIVERVIEW DR	W CENTRAL AVE	ARAM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101990	0.6 to 2.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$828**
101960	2.5 to 3.5 feet	**Vertical Change**	.47"	3 ft	3	REF		
101991	5.9 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$684**
101992	9.3 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
102060	11.6 to 25.9 feet	Key Note Segment		3 ft	43			
101961	12.1 to 13.1 feet	**Vertical Change**	-.29"	3 ft	3	REF		
101993	28.4 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101994	32.3 to 34.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	**$864**
101995	40.7 to 50.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	29	SF	$120	**$3,492**
101962	51.6 to 52.6 feet	**Vertical Change**	-.65"	3 ft	3	SF	$75	**$225**
101996	53.3 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,692**
101963	58.9 to 59.9 feet	**Vertical Change**	-.52"	3 ft	3	SF	$75	**$225**
101997	61.0 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	11	SF	$120	**$1,368**
101998	70.0 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101999	73.4 to 74.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
102000	74.9 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,656**
102001	88.1 to 89.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$468**
102061	90.2 to 103.3 feet	Key Note Segment		3 ft	39			
101964	90.7 to 91.7 feet	**Vertical Change**	.36"	3 ft	3	REF		
102002	103.4 to 107.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	12	SF	$40	**$468**
101965	104.3 to 105.3 feet	**Vertical Change**	.62"	3 ft	3	REF		
102003	107.5 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	11	SF	$120	**$1,368**
102068	108.9 to 110.0 feet		5.0-6.0%	3 ft	3			
102004	111.7 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	27	SF	$120	**$3,276**
101966	120.5 to 121.5 feet	**Vertical Change**	.27"	3 ft	3	REF		
102005	123.1 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
101967	125.1 to 126.1 feet	**Vertical Change**	-.29"	3 ft	3	REF		
102006	126.1 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	28	SF	$120	**$3,312**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2201141143	RIVERVIEW DR	W CENTRAL AVE	ARAM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101968	130.2 to 131.2 feet	Vertical Change	.3"	3 ft	3	REF		
102007	142.7 to 143.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	$432
102008	148.7 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	$396
102009	152.1 to 154.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	$792
102010	161.1 to 167.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	18	SF	$120	$2,196
102011	168.0 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	$1,440
101969	168.5 to 169.5 feet	Vertical Change	.6"	3 ft	3	REF		
102012	180.7 to 184.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	$1,296
102069	182.5 to 184.3 feet		5.0-6.0%	3 ft	5			
102013	184.3 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	25	SF	$120	$3,024
102014	195.7 to 196.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	$396
102015	197.6 to 200.0 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	7	SF	$120	$864
102016	200.2 to 201.2 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	$360
102017	203.6 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	$1,728
102018	208.4 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	$1,044
102019	219.8 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	$1,692
101970	228.2 to 229.2 feet	Vertical Change	-.34"	3 ft	3	LF	$75	$225
101971	230.0 to 231.0 feet	Vertical Change	.26"	3 ft	3	LF	$75	$225
101972	234.3 to 235.3 feet	Vertical Change	.29"	3 ft	3	LF	$75	$225
102062	234.6 to 249.1 feet	Key Note Segment		3 ft	44			
102020	251.0 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	$648
102021	257.8 to 262.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	13	SF	$120	$1,512
102022	266.3 to 269.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	$1,080
102023	273.0 to 278.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	16	SF	$120	$1,872
102024	279.5 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$432
102025	281.8 to 284.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	$1,116
101973	281.9 to 282.9 feet	Vertical Change	-.27"	3 ft	3	REF		
102026	288.6 to 294.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	18	SF	$120	$2,196

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2201141143	RIVERVIEW DR	W CENTRAL AVE	ARAM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101974	292.3 to 293.3 feet	Vertical Change	-.4"	3 ft	3	LF	$75	$225
102027	296.4 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	$360
101975	297.5 to 301.5 feet	Vertical Change	.3"	3 ft	12	REF		
102028	298.3 to 309.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	35	SF	$120	$4,176
101976	307.8 to 308.8 feet	Vertical Change	.29"	3 ft	3	REF		
102029	312.5 to 318.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	17	SF	$120	$2,088
102030	321.3 to 322.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	$468
101977	323.3 to 324.3 feet	Vertical Change	.29"	3 ft	3	LF	$75	$225
102063	327.3 to 340.4 feet	Key Note Segment		3 ft	39			
101978	341.9 to 342.9 feet	Vertical Change	-.35"	3 ft	3	LF	$75	$225
101979	344.3 to 345.3 feet	Vertical Change	.26"	3 ft	3	LF	$75	$225
101980	348.6 to 349.6 feet	Vertical Change	.36"	3 ft	3	LF	$75	$225
102031	353.1 to 354.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$612
101981	354.1 to 355.1 feet	Vertical Change	-.4"	3 ft	3	REF		
102032	359.3 to 361.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$612
102033	363.8 to 366.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	$1,080
102034	367.5 to 370.5 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	9	SF	$120	$1,080
102035	371.3 to 383.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	37	SF	$120	$4,392
102064	384.5 to 398.8 feet	Key Note Segment		3 ft	43			
102036	398.8 to 401.8 feet	Cross Slope (Driveway)	2.0-3.0%	3 ft	9	SF	$40	$360
102037	407.2 to 408.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	$432
101982	409.1 to 410.1 feet	Vertical Change	-.68"	3 ft	3	SF	$75	$225
102038	411.2 to 412.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	$576
102039	413.4 to 426.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	38	SF	$120	$4,536
102040	426.0 to 430.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	$1,440
102041	432.8 to 434.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	$504
102042	439.3 to 440.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	$360
102065	445.6 to 460.0 feet	Key Note Segment		3 ft	43			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2201141143	RIVERVIEW DR	W CENTRAL AVE	ARAM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102043	461.6 to 464.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$864**
102044	469.4 to 473.5 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	12	SF	$120	**$1,476**
102066	475.4 to 489.3 feet	Key Note Segment		3 ft	42			
102045	489.3 to 493.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	13	SF	$40	**$504**
102046	496.2 to 508.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	36	SF	$120	**$4,320**
101984	504.1 to 507.7 feet	**Vertical Change**	.27"	3 ft	11	REF		
102047	513.3 to 516.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	**$1,080**
102048	519.3 to 522.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101985	524.0 to 525.0 feet	**Vertical Change**	-.72"	3 ft	3	REF		
102049	524.8 to 527.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	7	SF	$120	**$864**
102050	529.5 to 541.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	36	SF	$120	**$4,284**
101986	530.1 to 531.1 feet	**Vertical Change**	-.57"	3 ft	3	REF		
101987	536.3 to 537.3 feet	**Vertical Change**	-.39"	3 ft	3	REF		
101988	542.7 to 543.7 feet	**Vertical Change**	.29"	3 ft	3	REF		
102051	543.7 to 545.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$540**
102052	552.6 to 555.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	10	SF	$120	**$1,152**
102053	557.5 to 564.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	22	SF	$120	**$2,664**
102054	577.2 to 580.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,044**
102067	580.2 to 592.7 feet	Key Note Segment		3 ft	38			
102055	592.7 to 595.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	3 ft	8	SF	$40	**$312**
102056	595.3 to 596.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
102057	599.0 to 602.2 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	10	SF	$120	**$1,152**
102058	604.3 to 605.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$576**
102059	606.4 to 609.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	10	SF	$120	**$1,224**

TOTAL COST FOR: E/S *side of* **RIVERVIEW DR** *Starting at:* **W CENTRAL AVE** **$95,379.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170758	RIVERVIEW DR	WESTBERRY BVD	SUBURBAN AVE	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71072	0.6 to 5.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,700**
71073	6.2 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
71074	47.3 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71071	50.0 to 51.0 feet	**Vertical Change**	.74"	5 ft	5	REF		
71075	55.6 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,720**
71076	79.1 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **WESTBERRY BVD** **$24,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109160745	RIVERVIEW DR	WOLFTRAP CT	MONOCOTT DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68294	0.0 to 21.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
68295	24.5 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
68296	30.3 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
68297	46.3 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
68298	53.8 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
68291	66.8 to 67.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
68299	68.8 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
68300	80.8 to 87.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
68301	87.9 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
68302	91.9 to 94.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
68303	96.8 to 110.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
68304	113.6 to 122.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
68305	124.2 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
68306	131.3 to 135.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
68307	136.0 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
68292	136.6 to 137.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
68308	142.8 to 144.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
68293	146.6 to 147.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
68309	146.9 to 150.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
68310	150.6 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
68311	171.0 to 172.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **RIVERVIEW DR** *Starting at:* **WOLFTRAP CT** **$78,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2105211023	RIVERWALK DR	CENTRAL AVE	N B ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42324	0.0 to 4.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
42325	4.7 to 7.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
42326	12.2 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
42283	19.9 to 20.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
42327	45.9 to 52.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
42374	52.9 to 76.6 feet	Key Note Segment		5 ft	118			
42328	79.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,600**
42285	101.5 to 102.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
42329	112.9 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
42286	115.1 to 116.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
42375	121.1 to 140.8 feet	Key Note Segment		5 ft	99			
42287	140.7 to 141.7 feet	**Vertical Change**	.66"	5 ft	5	REF		
42330	143.5 to 144.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
42331	145.0 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
42332	168.3 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
42288	173.9 to 174.9 feet	**Vertical Change**	2.04"	5 ft	5	REF		
42333	178.7 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
42289	181.2 to 182.2 feet	**Vertical Change**	.71"	5 ft	5	REF		
42334	186.1 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
42290	187.3 to 188.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
42291	192.3 to 193.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
42292	195.5 to 196.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
42293	203.3 to 204.3 feet	**Vertical Change**	2.88"	5 ft	5	SF	$75	**$375**
42335	204.9 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
42294	207.6 to 208.6 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
42336	209.3 to 210.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
42337	212.3 to 214.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
42338	217.9 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2105211023	RIVERWALK DR	CENTRAL AVE	N B ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42295	218.4 to 219.4 feet	Vertical Change	.75"	5 ft	5	REF		
42339	223.6 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
42340	227.5 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
42296	228.4 to 229.4 feet	Vertical Change	.59"	5 ft	5	REF		
42297	240.5 to 241.5 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
42341	242.3 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
42298	245.0 to 246.0 feet	Vertical Change	3.17"	5 ft	5	REF		
42342	249.7 to 251.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
42299	254.5 to 255.5 feet	Vertical Change	.79"	5 ft	5	REF		
42343	254.5 to 255.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
42300	256.1 to 257.1 feet	Vertical Change	-1.23"	5 ft	5	SF	$75	$375
42344	257.3 to 258.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
42345	261.6 to 287.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	$15,300
42301	267.2 to 268.2 feet	Vertical Change	.43"	5 ft	5	REF		
42302	279.8 to 280.8 feet	Vertical Change	1.57"	5 ft	5	REF		
42346	291.7 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
42303	292.8 to 296.1 feet	Vertical Change	.56"	5 ft	17	REF		
42347	296.7 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
42348	303.4 to 304.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
42349	305.3 to 311.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
42350	316.4 to 317.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
42304	318.2 to 319.2 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
42351	319.6 to 323.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,460
42305	324.2 to 325.2 feet	Vertical Change	2.52"	5 ft	5	SF	$75	$375
42306	330.7 to 331.7 feet	Vertical Change	.45"	5 ft	5	LF	$75	$375
42352	336.3 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
42307	341.7 to 344.6 feet	Vertical Change	.38"	5 ft	15	LF	$75	$1,088
42353	344.9 to 351.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2105211023	RIVERWALK DR	CENTRAL AVE	N B ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42308	347.9 to 348.9 feet	Vertical Change	.32"	5 ft	5	REF		
42354	355.8 to 357.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
42309	355.9 to 356.9 feet	Vertical Change	.29"	5 ft	5	REF		
42355	363.3 to 364.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
42356	367.0 to 382.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
42310	368.4 to 369.4 feet	Vertical Change	.32"	5 ft	5	REF		
42311	370.3 to 371.3 feet	Vertical Change	2.36"	5 ft	5	REF		
42312	381.5 to 382.5 feet	Vertical Change	.27"	5 ft	5	REF		
42313	383.8 to 384.8 feet	Vertical Change	1.48"	5 ft	5	SF	$75	$375
42357	389.3 to 390.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
42358	392.0 to 393.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
42314	392.5 to 393.5 feet	Vertical Change	-.29"	5 ft	5	REF		
42315	394.2 to 395.2 feet	Vertical Change	.58"	5 ft	5	SF	$75	$375
42316	396.6 to 397.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
42359	405.8 to 412.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
42317	414.5 to 415.5 feet	Vertical Change	2.65"	5 ft	5	SF	$75	$375
42360	418.2 to 421.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
42318	423.0 to 424.0 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
42361	424.3 to 425.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
42362	428.8 to 432.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
42319	431.2 to 432.2 feet	Vertical Change	.27"	5 ft	5	REF		
42363	444.3 to 448.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
42320	444.6 to 445.6 feet	Vertical Change	.26"	5 ft	5	REF		
42364	452.3 to 453.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
42365	459.2 to 462.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,920
42366	468.8 to 487.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	$11,100
42321	470.5 to 471.5 feet	Vertical Change	.34"	5 ft	5	REF		
42367	496.6 to 497.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/S	2105211023	RIVERWALK DR	CENTRAL AVE	N B ST	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42368	499.8 to 526.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,900**
42369	529.1 to 534.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
42322	534.8 to 538.1 feet	**Vertical Change**	.29"	5 ft	17	LF	$75	**$1,238**
42370	537.2 to 543.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
42371	546.2 to 554.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
42323	550.4 to 551.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
42372	556.9 to 558.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
42373	560.8 to 564.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: E/S *side of* **RIVERWALK DR** *Starting at:* **CENTRAL AVE** **$187,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2105211016	RIVERWALK DR	N A ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42202	2.1 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,648**
42203	9.8 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	38	SF	$120	**$4,608**
42204	21.2 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
42205	31.8 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,112**
42206	36.6 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	110	SF	$120	**$13,248**
42207	54.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	**$4,320**
42208	65.0 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,432**
42209	74.8 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	90	SF	$120	**$10,752**
42210	88.1 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	213	SF	$120	**$25,536**
42211	123.4 to 134.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	92	SF	$120	**$11,040**
42212	138.8 to 139.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	9	SF	$120	**$1,056**
42213	140.2 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	**$2,880**
42214	145.3 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	**$4,320**
42215	151.9 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	243	SF	$120	**$29,184**
42216	186.3 to 219.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	267	SF	$120	**$32,064**
42217	224.1 to 227.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,976**
42218	231.8 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	123	SF	$120	**$14,784**
42219	249.7 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	46	SF	$120	**$5,568**
42220	258.3 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	**$2,880**
42221	271.8 to 282.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	86	SF	$120	**$10,272**
42222	289.7 to 293.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
42223	313.1 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	52	SF	$120	**$6,240**
42224	325.1 to 328.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,552**
42225	334.4 to 335.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
42194	338.7 to 339.7 feet	**Vertical Change**	-.28"	8 ft	8	REF		
42226	339.4 to 341.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	13	SF	$120	**$1,536**
42227	354.3 to 357.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	**$2,880**
42228	364.7 to 370.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	42	SF	$120	**$5,088**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2105211016	RIVERWALK DR	N A ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42229	372.8 to 376.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	33	SF	$120	**$3,936**
42230	400.2 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	89	SF	$120	**$10,656**
42280	412.0 to 432.7 feet	Key Note Segment		8 ft	166			
42231	432.7 to 440.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	59	SF	$40	**$2,368**
42232	445.3 to 450.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,896**
42233	454.9 to 456.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
42234	461.7 to 462.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$960**
42235	466.3 to 486.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	159	SF	$120	**$19,104**
42236	489.1 to 506.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	139	SF	$120	**$16,704**
42195	491.4 to 492.4 feet	**Vertical Change**	-.3"	8 ft	8	REF		
42237	509.9 to 517.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	60	SF	$120	**$7,200**
42238	520.8 to 530.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	81	SF	$120	**$9,696**
42239	536.3 to 537.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,344**
42240	541.4 to 561.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	158	SF	$120	**$19,008**
42241	564.8 to 567.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,976**
42242	572.6 to 579.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	56	SF	$120	**$6,720**
42243	581.8 to 598.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	132	SF	$120	**$15,840**
42244	605.3 to 610.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	42	SF	$120	**$5,088**
42245	614.7 to 620.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	45	SF	$120	**$5,376**
42246	623.3 to 626.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
42247	630.8 to 633.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,592**
42248	638.8 to 642.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	32	SF	$120	**$3,840**
42196	648.8 to 649.8 feet	**Vertical Change**	.28"	8 ft	8	LF	$75	**$600**
42249	651.1 to 652.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
42250	656.7 to 659.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,976**
42251	667.2 to 668.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
42252	683.1 to 684.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
42253	686.4 to 689.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,592**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2105211016	RIVERWALK DR	N A ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42254	706.9 to 716.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	75	SF	$120	**$9,024**
42255	728.3 to 745.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	136	SF	$120	**$16,320**
42256	753.7 to 762.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	69	SF	$120	**$8,256**
42257	782.8 to 794.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	96	SF	$120	**$11,520**
42258	799.1 to 802.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,168**
42259	805.0 to 835.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	243	SF	$120	**$29,184**
42197	826.6 to 827.6 feet	**Vertical Change**	.3"	8 ft	8	REF		
42260	840.5 to 848.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	62	SF	$120	**$7,488**
42261	850.9 to 857.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,336**
42198	877.6 to 878.6 feet	**Vertical Change**	.27"	8 ft	8	REF		
42262	877.8 to 879.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,632**
42263	883.4 to 892.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	71	SF	$120	**$8,544**
42264	896.9 to 908.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	93	SF	$120	**$11,136**
42265	910.8 to 912.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,920**
42266	929.3 to 934.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	39	SF	$120	**$4,704**
42199	932.2 to 933.2 feet	**Vertical Change**	-.38"	8 ft	8	REF		
42267	954.5 to 966.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	97	SF	$120	**$11,616**
42268	975.9 to 980.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,032**
42269	983.5 to 985.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	17	SF	$120	**$2,016**
42281	986.0 to 1006.8 feet	Key Note Segment		8 ft	166			
42200	987.2 to 988.2 feet	**Vertical Change**	-.29"	8 ft	8	REF		
42270	1011.5 to 1012.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
42271	1014.8 to 1019.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,896**
42272	1024.4 to 1031.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,528**
42273	1031.5 to 1034.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	26	SF	$120	**$3,168**
42201	1035.1 to 1036.1 feet	**Vertical Change**	.28"	8 ft	8	REF		
42274	1036.1 to 1041.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	44	SF	$120	**$5,280**
42282	1041.6 to 1062.1 feet	Key Note Segment		8 ft	164			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W	2105211016	RIVERWALK DR	N A ST	CENTRAL AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42275	1062.1 to 1063.1 feet	Cross Slope (Driveway)	3.0-4.0%	8 ft	8	SF	$40	**$320**
42276	1063.1 to 1103.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	320	SF	$120	**$38,400**
42277	1105.6 to 1108.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	21	SF	$120	**$2,496**
42278	1108.4 to 1118.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	84	SF	$120	**$10,080**
42279	1121.3 to 1126.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,608**

TOTAL COST FOR: N/W *side of* **RIVERWALK DR** *Starting at:* **N A ST** **$579,096.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211028	RIVERWALK DR	N B ST	N A ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42376	7.9 to 8.9 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
42399	16.1 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,620
42377	19.0 to 21.7 feet	Vertical Change	.52"	5 ft	14	SF	$75	$1,013
42400	24.3 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
42440	27.7 to 30.4 feet		5.0-6.0%	5 ft	14			
42441	27.7 to 30.4 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	$1,620
42378	28.8 to 29.8 feet	Vertical Change	.38"	5 ft	5	REF		
42379	46.2 to 47.2 feet	Vertical Change	1.38"	5 ft	5	REF		
42401	46.2 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
42402	47.5 to 50.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
42403	53.2 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
42404	59.3 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
42380	62.1 to 63.1 feet	Vertical Change	.42"	5 ft	5	REF		
42381	70.6 to 71.6 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
42405	75.2 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
42382	79.2 to 80.2 feet	Vertical Change	.32"	5 ft	5	REF		
42406	85.2 to 89.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
42383	90.1 to 91.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
42384	91.9 to 92.9 feet	Vertical Change	1.02"	5 ft	5	SF	$75	$375
42407	95.8 to 97.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
42408	99.8 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
42385	107.0 to 108.0 feet	Vertical Change	.57"	5 ft	5	SF	$75	$375
42409	108.8 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
42410	113.2 to 118.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,120
42386	119.3 to 120.3 feet	Vertical Change	.34"	5 ft	5	REF		
42411	119.5 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,080
42412	138.0 to 139.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
42413	142.6 to 144.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211028	RIVERWALK DR	N B ST	N A ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42387	144.3 to 145.3 feet	Vertical Change	.44"	5 ft	5	REF		
42414	146.8 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
42415	161.2 to 164.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
42416	169.0 to 173.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
42417	174.0 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
42418	180.8 to 184.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
42419	184.8 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
42420	193.8 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
42421	204.8 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
42388	206.8 to 207.8 feet	Vertical Change	2.42"	5 ft	5	REF		
42389	215.7 to 216.7 feet	Vertical Change	-.29"	5 ft	5	REF		
42422	229.2 to 233.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
42423	233.6 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
42424	240.8 to 247.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
42425	251.3 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
42439	259.0 to 280.3 feet	Key Note Segment		5 ft	107			
42426	280.3 to 281.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	**$260**
42427	282.3 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
42390	287.6 to 288.6 feet	Vertical Change	3.07"	5 ft	5	SF	$75	**$375**
42428	289.1 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
42429	293.6 to 308.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
42391	304.8 to 305.8 feet	Vertical Change	.66"	5 ft	5	REF		
42430	313.6 to 314.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
42431	314.8 to 329.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
42392	317.0 to 318.0 feet	Vertical Change	1.08"	5 ft	5	SF	$75	**$375**
42393	325.5 to 326.5 feet	Vertical Change	.66"	5 ft	5	REF		
42394	334.3 to 335.3 feet	Vertical Change	.54"	5 ft	5	SF	$75	**$375**
42432	335.9 to 337.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105211028	RIVERWALK DR	N B ST	N A ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
42433	357.8 to 379.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
42434	387.7 to 393.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
42395	388.4 to 389.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
42396	403.3 to 404.3 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
42435	406.6 to 416.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
42397	416.0 to 417.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
42436	420.5 to 424.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
42437	441.5 to 446.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
42398	449.8 to 450.8 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
42438	454.8 to 458.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: S *side of* **RIVERWALK DR** *Starting at:* **N B ST** **$155,442.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091007	ROBINWOOD WAY	1300 ROBINWOOD WAY	1404 ROBINWOOD WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128425	0.0 to 11.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	48	SF	$120	$5,712
128426	12.4 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$768
128427	17.0 to 23.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	26	SF	$120	$3,168
128428	27.7 to 29.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	$672
128429	29.1 to 40.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	45	SF	$120	$5,376
128430	40.3 to 45.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	20	SF	$120	$2,400
128431	45.8 to 52.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	26	SF	$120	$3,072
128416	47.6 to 48.6 feet	Vertical Change	.27"	4 ft	4	REF		
128432	53.1 to 61.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	33	SF	$120	$3,936
128453	61.3 to 75.6 feet	Key Note Segment		4 ft	57			
128417	68.2 to 69.2 feet	Vertical Change	.35"	4 ft	4	REF		
128418	83.9 to 84.9 feet	Vertical Change	.26"	4 ft	4	REF		
128433	84.1 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
128434	91.8 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,688
128419	94.0 to 95.0 feet	Vertical Change	.36"	4 ft	4	REF		
128435	97.4 to 101.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	$1,968
128454	102.0 to 116.4 feet	Key Note Segment		4 ft	58			
128420	108.5 to 109.5 feet	Vertical Change	.28"	4 ft	4	REF		
128436	116.4 to 145.4 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	116	SF	$40	$4,640
128437	148.1 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	$2,496
128421	151.9 to 152.9 feet	Vertical Change	-.3"	4 ft	4	REF		
128438	156.2 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	$4,224
128439	165.3 to 169.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	$1,872
128455	170.0 to 184.4 feet	Key Note Segment		4 ft	58			
128440	184.4 to 187.4 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	12	SF	$40	$480
128441	189.5 to 197.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	$3,888
128456	198.8 to 212.4 feet	Key Note Segment		4 ft	54			
128442	214.6 to 231.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	$8,256

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091007	ROBINWOOD WAY	1300 ROBINWOOD WAY	1404 ROBINWOOD WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128423	217.0 to 218.0 feet	Vertical Change	.47"	4 ft	4	REF		
128443	234.1 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	$1,296
128444	239.8 to 243.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	$1,920
128445	246.3 to 248.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	$912
128446	248.2 to 249.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$768
128447	253.4 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	$4,272
128448	262.3 to 280.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	72	SF	$120	$8,592
128424	270.3 to 271.3 feet	Vertical Change	-.27"	4 ft	4	REF		
128457	280.2 to 293.8 feet	Key Note Segment		4 ft	54			
128449	294.4 to 295.9 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	6	SF	$40	$240
128450	298.3 to 300.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	$1,056
128451	302.2 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$768
128452	306.1 to 307.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	$864

TOTAL COST FOR: S *side of* **ROBINWOOD WAY** *Starting at:* **1300 ROBINWOOD WAY** **$77,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091009	ROBINWOOD WAY	1404 ROBINWOOD WAY	1416 ROBINWOOD WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128469	0.5 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	80	SF	$120	**$9,648**
128458	1.2 to 2.2 feet	**Vertical Change**	.36"	4 ft	4	REF		
128470	20.8 to 31.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	43	SF	$120	**$5,136**
128459	21.8 to 22.8 feet	**Vertical Change**	1.71"	4 ft	4	REF		
128487	23.8 to 24.8 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
128460	34.4 to 35.4 feet	**Vertical Change**	.65"	4 ft	4	REF		
128471	34.4 to 38.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	15	SF	$120	**$1,776**
128461	38.3 to 39.3 feet	**Vertical Change**	.31"	4 ft	4	REF		
128472	38.4 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,400**
128473	44.3 to 59.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	61	SF	$120	**$7,344**
128484	62.3 to 76.3 feet	Key Note Segment		4 ft	56			
128462	63.3 to 64.3 feet	**Vertical Change**	-.42"	4 ft	4	REF		
128474	76.8 to 79.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
128475	80.4 to 90.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	39	SF	$120	**$4,704**
128485	90.3 to 104.1 feet	Key Note Segment		4 ft	55			
128476	104.9 to 110.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,736**
128463	105.0 to 106.0 feet	**Vertical Change**	-.3"	4 ft	4	REF		
128464	110.0 to 111.0 feet	**Vertical Change**	.46"	4 ft	4	REF		
128477	111.8 to 122.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	43	SF	$120	**$5,136**
128488	116.8 to 117.8 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
128478	125.9 to 140.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	59	SF	$120	**$7,104**
128465	130.3 to 131.3 feet	**Vertical Change**	-.27"	4 ft	4	REF		
128479	140.8 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
128466	144.0 to 145.0 feet	**Vertical Change**	.35"	4 ft	4	LF	$75	**$300**
128480	147.0 to 160.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	56	SF	$120	**$6,672**
128489	152.0 to 153.0 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
128481	163.8 to 170.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
128486	170.1 to 183.9 feet	Key Note Segment		4 ft	55			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091009	ROBINWOOD WAY	1404 ROBINWOOD WAY	1416 ROBINWOOD WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128467	171.2 to 172.2 feet	**Vertical Change**	.46"	4 ft	4	REF		
128482	184.8 to 189.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,352**
128468	185.0 to 186.0 feet	**Vertical Change**	-.26"	4 ft	4	REF		
128483	193.1 to 198.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,448**

TOTAL COST FOR: S *side of* **ROBINWOOD WAY** *Starting at:* **1404 ROBINWOOD WAY** **$63,711.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091011	ROBINWOOD WAY	1500 ROBINWOOD WAY	FOUNTAIN WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128498	1.0 to 3.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,248**
128499	4.3 to 7.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	12	SF	$120	**$1,392**
128500	9.1 to 10.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	5	SF	$120	**$576**
128490	12.9 to 13.9 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
128501	14.6 to 20.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	22	SF	$120	**$2,592**
128502	20.2 to 21.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	**$768**
128503	25.5 to 52.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	107	SF	$120	**$12,864**
128491	52.8 to 53.8 feet	**Vertical Change**	-.55"	4 ft	4	SF	$75	**$300**
128492	57.7 to 58.7 feet	**Vertical Change**	.49"	4 ft	4	LF	$75	**$300**
128504	58.8 to 64.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
128512	65.4 to 79.7 feet	Key Note Segment		4 ft	57			
128493	66.1 to 67.1 feet	**Vertical Change**	.34"	4 ft	4	REF		
128505	84.9 to 92.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,600**
128514	86.0 to 87.0 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
128494	87.3 to 88.3 feet	**Vertical Change**	.66"	4 ft	4	REF		
128495	90.7 to 91.7 feet	**Vertical Change**	.77"	4 ft	4	REF		
128513	92.4 to 106.4 feet	Key Note Segment		4 ft	56			
128496	92.6 to 93.6 feet	**Vertical Change**	.4"	4 ft	4	REF		
128506	107.7 to 109.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
128507	111.4 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
128508	118.0 to 128.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	43	SF	$120	**$5,184**
128509	132.5 to 136.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	16	SF	$120	**$1,872**
128510	137.9 to 140.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$1,008**
128511	140.4 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**

TOTAL COST FOR: S *side of* **ROBINWOOD WAY** *Starting at:* **1500 ROBINWOOD WAY** **$39,396.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081543	ROBINWOOD WAY	FOUNTAIN WAY	1508 ROBINWOOD WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127668	1.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
127669	3.6 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
127670	9.8 to 17.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,552**
127671	19.4 to 21.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
127665	20.4 to 21.4 feet	**Vertical Change**	-.69"	4 ft	4	REF		
127672	22.2 to 52.2 feet	Key Note Segment		4 ft	120			
127666	23.8 to 24.8 feet	**Vertical Change**	.5"	4 ft	4	REF		
127667	56.0 to 57.0 feet	**Vertical Change**	.46"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: N *side of* **ROBINWOOD WAY** *Starting at:* **FOUNTAIN WAY** **$6,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091004	ROBINWOOD WAY	KERN ST	1300 ROBINWOOD WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128411	3.3 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,064**
128412	21.3 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,080**
128414	32.3 to 45.9 feet	Key Note Segment		4 ft	54			
128409	32.8 to 33.8 feet	**Vertical Change**	.3"	4 ft	4	REF		
128413	45.9 to 53.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	30	SF	$40	**$1,216**
128410	46.8 to 47.8 feet	**Vertical Change**	-.35"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **ROBINWOOD WAY** *Starting at:* **KERN ST** **$13,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071358	ROGERS ST	E CLEVELAND AVE	GREEN WAY	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43773	0.3 to 14.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,614**
43774	14.4 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
43791	20.3 to 34.8 feet	Key Note Segment		5 ft	65			
43775	34.8 to 36.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	**$270**
43776	36.8 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,914**
43792	48.1 to 62.0 feet	Key Note Segment		5 ft	63			
43777	63.5 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,904**
43753	63.7 to 64.7 feet	Vertical Change	.27"	5 ft	5	REF		
43754	87.6 to 88.6 feet	Vertical Change	.98"	5 ft	5	REF		
43778	93.9 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,456**
43755	97.3 to 98.3 feet	Vertical Change	.26"	5 ft	5	REF		
43793	101.7 to 114.8 feet	Key Note Segment		5 ft	59			
43756	117.4 to 118.4 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$338**
43779	135.1 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
43780	152.1 to 153.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
43794	155.9 to 169.4 feet	Key Note Segment		5 ft	61			
43758	159.8 to 160.8 feet	Vertical Change	.31"	5 ft	5	REF		
43781	171.2 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,456**
43759	175.9 to 176.9 feet	Vertical Change	-.33"	5 ft	5	REF		
43782	180.5 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,832**
43760	183.9 to 184.9 feet	Vertical Change	-.27"	5 ft	5	REF		
43783	201.2 to 208.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,996**
43761	207.9 to 208.9 feet	Vertical Change	.49"	5 ft	5	REF		
43795	208.6 to 222.3 feet	Key Note Segment		5 ft	62			
43784	222.3 to 231.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	39	SF	$40	**$1,566**
43762	231.9 to 232.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$338**
43785	236.3 to 242.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
43764	256.0 to 257.0 feet	Vertical Change	-.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071358	ROGERS ST	E CLEVELAND AVE	GREEN WAY	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43786	256.1 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,106**
43796	262.8 to 276.6 feet	Key Note Segment		5 ft	62			
43787	277.1 to 298.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	94	SF	$40	**$3,762**
43765	280.2 to 281.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
43788	304.3 to 307.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
43766	314.3 to 315.3 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$338**
43767	317.7 to 318.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**
43768	324.8 to 325.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$338**
43769	328.1 to 329.1 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$338**
43789	331.1 to 344.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,236**
43770	345.5 to 346.5 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$338**
43771	348.5 to 349.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$338**
43790	351.3 to 354.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
43772	351.8 to 352.8 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ROGERS ST** *Starting at:* **E CLEVELAND AVE** **$72,612.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071408	ROGERS ST	GREEN WAY	W SHERWOOD WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43821	0.0 to 8.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,080**
43811	7.5 to 8.5 feet	**Vertical Change**	.48"	4 ft	4	REF		
43822	8.9 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
43823	22.3 to 32.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,752**
43812	28.0 to 29.0 feet	**Vertical Change**	.41"	4 ft	4	REF		
43824	33.0 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
43825	38.3 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
43826	48.5 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
43844	51.6 to 65.3 feet	Key Note Segment		4 ft	55			
43827	70.0 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
43828	82.5 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
43813	86.5 to 87.5 feet	**Vertical Change**	.62"	4 ft	4	SF	$75	**$300**
43829	102.2 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
43845	105.2 to 119.5 feet	Key Note Segment		4 ft	57			
43830	121.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
43831	138.1 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
43846	158.7 to 171.8 feet	Key Note Segment		4 ft	52			
43832	174.5 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
43833	203.0 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
43834	210.3 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
43814	212.7 to 213.7 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
43847	213.3 to 225.3 feet	Key Note Segment		4 ft	48			
43835	230.5 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
43836	236.8 to 247.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
43837	251.8 to 265.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	**$6,624**
43848	265.6 to 279.8 feet	Key Note Segment		4 ft	57			
43816	292.8 to 293.8 feet	**Vertical Change**	.51"	4 ft	4	SF	$75	**$300**
43849	294.8 to 295.8 feet		7.0-8.0%	4 ft	4			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071408	ROGERS ST	GREEN WAY	W SHERWOOD WAY	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43838	298.3 to 299.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	**$672**
43817	298.8 to 299.8 feet	**Vertical Change**	-.34"	4 ft	4	REF		
43839	302.0 to 305.4 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	14	SF	$120	**$1,632**
43850	304.8 to 306.9 feet		8.0-9.0%	4 ft	8			
43818	305.7 to 306.7 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
43840	307.6 to 308.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
43841	308.8 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
43819	327.2 to 328.2 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
43842	348.2 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,088**
43820	358.5 to 359.5 feet	**Vertical Change**	.43"	4 ft	4	REF		
43843	363.1 to 368.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**

TOTAL COST FOR: E *side of* **ROGERS ST** *Starting at:* **GREEN WAY** **$71,436.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106071402	ROGERS ST	GREEN WAY	1124 ROGERS ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43806	5.3 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
43804	6.1 to 7.1 feet	**Vertical Change**	.28"	4 ft	4	REF		
43807	24.2 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
43810	25.6 to 37.8 feet	Key Note Segment		4 ft	49			
43805	27.1 to 28.1 feet	**Vertical Change**	-.26"	4 ft	4	REF		
43808	37.8 to 40.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	12	SF	$40	**$464**
43809	44.8 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**

TOTAL COST FOR: W *side of* **ROGERS ST** *Starting at:* **GREEN WAY** **$7,232.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271435	ROMA COURT	1252 ROMA COURT	MILANO LANE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111537	4.7 to 22.8 feet	Key Note Segment		5 ft	91			
111521	25.2 to 26.2 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
111528	28.4 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
111522	33.7 to 34.7 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
111523	46.3 to 47.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
111524	79.8 to 80.8 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
111529	82.8 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
111538	84.5 to 105.1 feet	Key Note Segment		5 ft	103			
111530	111.9 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
111539	114.3 to 134.1 feet	Key Note Segment		5 ft	99			
111531	136.2 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
111525	137.7 to 138.7 feet	Vertical Change	-.35"	5 ft	5	REF		
111532	149.7 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
111533	157.4 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
111540	169.4 to 188.8 feet	Key Note Segment		5 ft	97			
111526	179.3 to 180.3 feet	Vertical Change	.31"	5 ft	5	REF		
111534	190.3 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
111535	199.0 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
111527	200.6 to 201.6 feet	Vertical Change	.29"	5 ft	5	REF		
111536	210.0 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900

TOTAL COST FOR: W *side of* **ROMA COURT** *Starting at:* **1252 ROMA COURT** **$24,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271350	ROMA COURT	1355 ROMA CT	MILANO RD	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111184	0.0 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
111185	1.5 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111170	9.4 to 10.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
111186	10.3 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
111171	18.0 to 19.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
111202	24.3 to 47.2 feet	Key Note Segment		5 ft	115			
111172	31.8 to 32.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
111173	39.0 to 40.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
111187	48.3 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
111188	49.3 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
111189	52.8 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
111174	53.5 to 54.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
111203	55.7 to 75.9 feet	Key Note Segment		5 ft	101			
111175	69.7 to 70.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
111190	76.7 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
111191	78.4 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,500**
111176	80.2 to 81.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
111177	102.6 to 103.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
111192	112.3 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
111193	121.7 to 127.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
111178	129.3 to 130.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
111194	130.8 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
111204	132.2 to 155.8 feet	Key Note Segment		5 ft	118			
111179	158.4 to 159.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
111195	158.4 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
111205	165.9 to 184.8 feet	Key Note Segment		5 ft	95			
111180	187.7 to 188.7 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
111196	189.6 to 195.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271350	ROMA COURT	1355 ROMA CT	MILANO RD	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111197	199.3 to 213.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
111198	220.0 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
111181	238.6 to 239.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
111206	241.7 to 263.2 feet	Key Note Segment		5 ft	108			
111199	265.7 to 269.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
111182	267.4 to 268.4 feet	**Vertical Change**	-.9"	5 ft	5	REF		
111207	269.7 to 292.5 feet	Key Note Segment		5 ft	114			
111183	283.3 to 284.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
111200	292.9 to 297.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111201	314.4 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**

TOTAL COST FOR: E *side of* **ROMA COURT** *Starting at:* **1355 ROMA CT** **$74,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201271433	ROMA COURT	MILANO LANE	1252 ROMA COURT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111507	0.0 to 2.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111499	4.6 to 5.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
111508	15.5 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
111500	19.1 to 20.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
111517	24.3 to 46.5 feet	Key Note Segment		5 ft	111			
111509	48.8 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
111501	65.3 to 66.3 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
111502	74.4 to 75.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
111510	77.4 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
111518	82.2 to 101.0 feet	Key Note Segment		5 ft	94			
111503	101.3 to 102.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
111511	103.0 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111512	108.0 to 109.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
111519	111.6 to 133.5 feet	Key Note Segment		5 ft	110			
111504	125.7 to 126.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
111513	134.6 to 135.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
111514	135.6 to 138.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
111515	142.8 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
111516	190.4 to 191.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
111520	191.9 to 211.5 feet	Key Note Segment		5 ft	98			
111505	202.9 to 203.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
111506	206.4 to 207.4 feet	**Vertical Change**	.38"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ROMA COURT** *Starting at:* **MILANO LANE** **$19,425.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271345	ROMA COURT	MILANO LANE	1362 ROMA COURT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111152	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
111153	2.2 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
111130	12.6 to 13.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
111154	13.1 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
111131	20.6 to 21.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
111163	21.5 to 46.0 feet	Key Note Segment		5 ft	123			
111132	48.2 to 49.2 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
111133	59.9 to 60.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111164	74.8 to 97.0 feet	Key Note Segment		5 ft	111			
111134	85.5 to 86.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
111135	99.8 to 103.6 feet	**Vertical Change**	.29"	5 ft	19	LF	$75	**$1,425**
111165	102.4 to 123.4 feet	Key Note Segment		5 ft	105			
111136	113.5 to 114.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
111137	126.9 to 127.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111155	126.9 to 130.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
111156	131.3 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
111138	148.1 to 149.1 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
111157	153.8 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111139	172.5 to 173.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111158	175.6 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
111140	176.7 to 177.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
111166	178.2 to 199.7 feet	Key Note Segment		5 ft	108			
111141	200.8 to 201.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
111167	205.7 to 224.8 feet	Key Note Segment		5 ft	96			
111159	226.5 to 235.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
111142	230.1 to 231.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
111160	242.8 to 282.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,820**
111143	248.7 to 249.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201271345	ROMA COURT	MILANO LANE	1362 ROMA COURT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111144	257.2 to 258.2 feet	Vertical Change	.29"	5 ft	5	REF		
111146	276.5 to 277.5 feet	Vertical Change	.38"	5 ft	5	REF		
111168	282.5 to 304.1 feet	Key Note Segment		5 ft	108			
111147	292.4 to 293.4 feet	Vertical Change	-.27"	5 ft	5	REF		
111169	309.2 to 328.3 feet	Key Note Segment		5 ft	96			
111148	309.8 to 310.8 feet	Vertical Change	-.37"	5 ft	5	REF		
111161	331.0 to 333.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111149	332.6 to 333.6 feet	Vertical Change	.28"	5 ft	5	REF		
111162	339.2 to 366.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
111150	354.7 to 355.7 feet	Vertical Change	.46"	5 ft	5	REF		
111151	368.0 to 369.0 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **ROMA COURT** *Starting at:* **MILANO LANE** **$63,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101247	ROOSEVELT AVE	12TH ST	S A ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50750	0.0 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
50751	4.7 to 7.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
50752	13.1 to 14.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
50753	17.3 to 52.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	175	SF	$120	**$21,000**
50754	54.6 to 69.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
50738	62.9 to 63.9 feet	**Vertical Change**	-.58"	5 ft	5	REF		
50739	69.4 to 70.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
50755	91.9 to 100.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
50756	102.9 to 114.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
50757	114.0 to 131.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
50758	131.8 to 139.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
50759	140.3 to 142.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
50760	144.2 to 154.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
50761	156.2 to 167.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
50740	166.5 to 167.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
50762	170.4 to 172.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
50763	174.7 to 182.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
50764	183.1 to 187.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
50765	188.0 to 195.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
50766	198.0 to 212.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	74	SF	$120	**$8,820**
50767	213.6 to 220.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
50741	215.2 to 216.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
50742	219.6 to 220.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
50768	224.5 to 225.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
50769	225.6 to 227.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
50770	228.1 to 246.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	94	SF	$120	**$11,220**
50743	235.3 to 236.3 feet	**Vertical Change**	.6"	5 ft	5	REF		
50771	248.7 to 272.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101247	ROOSEVELT AVE	12TH ST	S A ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50744	257.5 to 258.5 feet	Vertical Change	.29"	5 ft	5	REF		
50745	264.3 to 265.3 feet	Vertical Change	.35"	5 ft	5	REF		
50772	274.7 to 279.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
50773	279.2 to 291.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
50774	291.0 to 293.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
50775	295.5 to 296.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
50776	297.2 to 338.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,480**
50777	340.9 to 344.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
50778	346.5 to 349.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
50779	352.1 to 355.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
50780	359.4 to 376.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
50781	378.9 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
50782	384.8 to 393.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
50783	397.2 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
50784	410.9 to 424.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
50747	416.1 to 417.1 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
50785	424.4 to 448.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
50786	451.4 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
50787	460.1 to 469.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
50748	467.7 to 468.7 feet	Vertical Change	.31"	5 ft	5	REF		
50788	473.8 to 487.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
50789	487.3 to 495.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
50790	496.1 to 506.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
50749	507.0 to 508.0 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **ROOSEVELT AVE** *Starting at:* **12TH ST** **$248,025.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101134	ROOSEVELT AVE	A ST	S LAKE ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50297	25.9 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
50298	34.4 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
50299	64.3 to 87.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
50288	82.2 to 83.2 feet	**Vertical Change**	.58"	5 ft	5	REF		
50300	87.4 to 123.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	183	SF	$120	**$21,900**
50301	126.8 to 130.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
50302	132.5 to 133.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50303	133.9 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
50304	143.8 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
50331	150.0 to 169.7 feet	Key Note Segment		5 ft	99			
50305	176.3 to 181.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
50289	180.0 to 181.0 feet	**Vertical Change**	-.76"	5 ft	5	REF		
50306	183.9 to 185.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50307	189.8 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
50290	212.3 to 213.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
50308	218.5 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
50332	220.4 to 231.2 feet	Key Note Segment		5 ft	54			
50309	231.2 to 232.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
50310	233.8 to 238.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
50311	239.1 to 241.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
50312	244.3 to 247.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
50313	249.0 to 256.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
50314	256.4 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
50315	260.9 to 272.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
50316	275.0 to 276.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
50333	277.7 to 290.2 feet	Key Note Segment		5 ft	63			
50317	291.3 to 315.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,340**
50318	318.3 to 319.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101134	ROOSEVELT AVE	A ST	S LAKE ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50319	321.9 to 326.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
50334	328.5 to 337.0 feet	Key Note Segment		5 ft	43			
50291	329.3 to 330.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
50292	338.2 to 339.2 feet	**Vertical Change**	-1.08"	5 ft	5	REF		
50320	339.1 to 344.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
50335	344.7 to 354.2 feet	Key Note Segment		5 ft	48			
50293	345.9 to 346.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
50294	354.7 to 355.7 feet	**Vertical Change**	.93"	5 ft	5	SF	$75	**$375**
50295	357.1 to 358.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
50321	359.1 to 361.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
50322	362.8 to 375.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
50323	375.6 to 386.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
50336	386.6 to 399.3 feet	Key Note Segment		5 ft	64			
50296	388.2 to 389.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
50324	401.3 to 404.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
50325	405.2 to 410.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
50326	414.9 to 430.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
50327	430.1 to 431.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50337	431.4 to 446.8 feet	Key Note Segment		5 ft	77			
50328	452.1 to 455.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
50329	455.0 to 456.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
50330	466.5 to 501.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**

TOTAL COST FOR: E *side of* **ROOSEVELT AVE** *Starting at:* **A ST** **$154,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101128	ROOSEVELT AVE	OLIVE AVE	A ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50213	1.5 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
50214	10.8 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
50215	18.4 to 26.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
50216	26.6 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
50217	35.7 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
50218	59.3 to 65.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
50219	79.6 to 98.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	96	SF	$120	**$11,520**
50220	119.6 to 120.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
50221	125.5 to 146.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
50206	127.0 to 128.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50207	135.6 to 136.6 feet	**Vertical Change**	.62"	5 ft	5	REF		
50222	150.3 to 151.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
50223	154.2 to 166.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,080**
50224	166.5 to 192.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,360**
50225	195.6 to 200.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
50226	203.0 to 239.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	184	SF	$120	**$22,080**
50227	243.3 to 262.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
50228	266.3 to 278.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
50229	278.7 to 285.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
50230	293.6 to 321.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
50231	324.0 to 351.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
50232	352.5 to 353.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
50233	356.9 to 365.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
50208	367.6 to 368.6 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
50234	370.2 to 374.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
50235	376.5 to 398.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,380**
50209	381.1 to 382.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50210	396.9 to 397.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101128	ROOSEVELT AVE	OLIVE AVE	A ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50236	401.3 to 411.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
50237	413.7 to 420.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
50211	421.0 to 422.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
50238	424.1 to 429.8 feet	Cross Slope (PAR)	>15.0%	5 ft	29	SF	$120	**$3,420**
50239	429.8 to 433.5 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	19	SF	$120	**$2,220**
50240	437.6 to 445.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	40	SF	$120	**$4,800**
50241	445.6 to 449.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
50242	452.1 to 454.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
50243	456.9 to 463.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	31	SF	$120	**$3,720**
50244	463.1 to 488.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	129	SF	$120	**$15,420**
50245	491.1 to 493.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
50246	494.9 to 504.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
50247	504.3 to 506.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
50248	507.6 to 509.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
50249	514.9 to 518.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
50250	521.8 to 551.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
50251	551.3 to 556.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
50252	557.8 to 599.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	209	SF	$120	**$25,080**
50212	561.9 to 562.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
50253	604.3 to 605.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50282	631.1 to 667.6 feet	Key Note Segment		5 ft	183			
50254	668.8 to 670.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
50255	671.3 to 715.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
50256	727.2 to 730.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
50257	730.3 to 746.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
50258	749.3 to 763.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
50283	765.5 to 785.9 feet	Key Note Segment		5 ft	102			
50284	787.4 to 800.4 feet	Key Note Segment		5 ft	65			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101128	ROOSEVELT AVE	OLIVE AVE	A ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50259	803.8 to 840.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
50260	841.4 to 849.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
50285	849.9 to 859.3 feet	Key Note Segment		5 ft	47			
50261	860.3 to 861.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
50262	864.3 to 872.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
50263	874.2 to 877.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
50286	879.2 to 888.3 feet	Key Note Segment		5 ft	46			
50264	893.1 to 899.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
50265	901.6 to 903.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
50266	903.2 to 907.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
50267	910.9 to 919.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
50268	920.3 to 923.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
50287	923.1 to 932.1 feet	Key Note Segment		5 ft	45			
50269	932.9 to 933.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
50270	934.9 to 941.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
50271	945.0 to 958.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
50272	961.6 to 977.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
50273	981.0 to 985.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
50274	987.8 to 988.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
50275	992.3 to 994.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
50276	995.1 to 1005.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
50277	1007.8 to 1016.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
50278	1018.4 to 1022.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
50279	1024.8 to 1028.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
50280	1028.1 to 1030.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
50281	1036.3 to 1037.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **ROOSEVELT AVE** *Starting at:* **OLIVE AVE** **$428,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101114	ROOSEVELT AVE	S A ST	S B ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50148	0.8 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
50149	10.6 to 30.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
50138	12.5 to 13.5 feet	**Vertical Change**	-.53"	5 ft	5	REF		
50139	27.9 to 28.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
50150	31.8 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
50151	40.3 to 42.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
50152	47.8 to 57.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
50141	53.7 to 54.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
50153	58.7 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
50171	86.1 to 102.6 feet	Key Note Segment		5 ft	83			
50154	104.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
50143	106.9 to 107.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
50155	108.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
50156	122.8 to 130.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
50157	132.3 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
50144	132.7 to 133.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50145	138.3 to 139.3 feet	**Vertical Change**	.96"	5 ft	5	REF		
50158	147.1 to 148.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
50159	150.8 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,300**
50160	181.3 to 194.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
50161	195.6 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50172	196.8 to 224.9 feet	Key Note Segment		5 ft	141			
50146	223.7 to 224.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
50162	235.3 to 260.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
50147	261.6 to 262.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50163	267.8 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
50164	277.9 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
50165	314.8 to 327.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101114	ROOSEVELT AVE	S A ST	S B ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50166	330.4 to 335.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
50167	336.8 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
50168	358.8 to 370.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
50169	375.6 to 377.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
50170	379.8 to 383.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: W *side of* **ROOSEVELT AVE** *Starting at:* **S A ST** **$153,330.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101119	ROOSEVELT AVE	S B ST	S C ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50175	12.7 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
50176	25.6 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
50177	45.6 to 50.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
50178	50.8 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
50179	59.9 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50180	62.3 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
50181	75.9 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
50182	80.6 to 106.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,660**
50183	107.6 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50204	110.3 to 131.7 feet	Key Note Segment		5 ft	107			
50173	130.5 to 131.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
50184	138.9 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
50185	146.4 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
50186	176.7 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
50187	189.6 to 206.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
50188	206.6 to 222.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
50189	233.4 to 237.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
50190	240.5 to 262.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
50174	246.9 to 247.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
50205	267.5 to 297.3 feet	Key Note Segment		5 ft	149			
50191	297.4 to 298.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
50192	299.2 to 310.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
50193	310.5 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
50194	325.3 to 334.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
50195	337.4 to 354.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
50196	359.4 to 375.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
50197	384.0 to 390.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
50198	397.3 to 398.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101119	ROOSEVELT AVE	S B ST	S C ST	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50199	398.7 to 430.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
50200	433.3 to 449.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
50201	451.6 to 461.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
50202	464.3 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
50203	470.1 to 489.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**

TOTAL COST FOR: W *side of* **ROOSEVELT AVE** *Starting at:* **S B ST** **$199,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101138	ROOSEVELT AVE	S LAKE ST	SUNRISE AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50348	1.5 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
50338	13.1 to 14.1 feet	**Vertical Change**	-.43"	5 ft	5	REF		
50377	16.3 to 30.3 feet	Key Note Segment		5 ft	70			
50349	31.3 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,700**
50350	37.3 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
50378	59.3 to 73.4 feet	Key Note Segment		5 ft	71			
50351	73.4 to 84.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,140**
50379	84.3 to 98.8 feet	Key Note Segment		5 ft	73			
50352	100.0 to 106.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
50353	109.3 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
50339	111.5 to 112.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
50354	123.5 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50355	128.6 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
50340	137.4 to 138.4 feet	**Vertical Change**	-.51"	5 ft	5	REF		
50356	137.8 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
50380	145.2 to 159.8 feet	Key Note Segment		5 ft	73			
50341	146.2 to 147.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
50357	166.3 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
50381	170.7 to 184.7 feet	Key Note Segment		5 ft	70			
50358	188.8 to 190.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50359	225.2 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50342	227.0 to 228.0 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50382	230.8 to 245.2 feet	Key Note Segment		5 ft	72			
50360	248.1 to 255.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
50383	255.7 to 270.0 feet	Key Note Segment		5 ft	72			
50343	270.2 to 271.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
50361	271.2 to 272.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50385	271.9 to 273.1 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101138	ROOSEVELT AVE	S LAKE ST	SUNRISE AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50362	273.4 to 295.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,020**
50363	297.2 to 304.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
50364	308.2 to 324.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
50344	324.3 to 325.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
50384	324.5 to 341.3 feet	Key Note Segment		5 ft	84			
50345	341.4 to 342.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
50365	343.7 to 358.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
50346	354.3 to 355.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
50347	356.4 to 357.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
50366	359.3 to 361.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
50367	363.3 to 367.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
50368	370.2 to 379.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
50369	379.6 to 393.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
50370	393.7 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
50371	401.1 to 405.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
50372	405.1 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
50373	432.1 to 442.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
50374	443.1 to 454.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
50375	461.8 to 473.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
50376	475.8 to 492.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**

TOTAL COST FOR: E *side of* **ROOSEVELT AVE** *Starting at:* **S LAKE ST** **$153,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101231	ROOSEVELT AVE	SUNRISE AVE	S LAKE ST	114

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50633	0.0 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
50634	10.1 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
50635	13.3 to 17.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
50636	17.6 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
50614	33.5 to 34.5 feet	**Vertical Change**	2.1"	5 ft	5	REF		
50637	38.0 to 40.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
50615	38.6 to 39.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
50638	41.6 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
50616	42.1 to 45.2 feet	**Vertical Change**	.35"	5 ft	16	REF		
50639	46.3 to 48.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
50617	46.6 to 47.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
50673	48.5 to 69.0 feet	Key Note Segment		5 ft	103			
50618	53.6 to 54.6 feet	**Vertical Change**	.56"	5 ft	5	REF		
50640	72.8 to 79.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
50641	83.0 to 94.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,080**
50642	94.9 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
50620	98.5 to 99.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
50643	105.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
50644	110.8 to 124.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
50622	124.3 to 125.3 feet	**Vertical Change**	2.43"	5 ft	5	REF		
50645	124.4 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50623	126.3 to 129.2 feet	**Vertical Change**	.45"	5 ft	14	LF	$75	**$1,088**
50646	130.3 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
50624	132.1 to 133.1 feet	**Vertical Change**	.69"	5 ft	5	REF		
50647	135.2 to 136.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
50625	137.9 to 138.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50648	138.7 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
50626	139.9 to 143.1 feet	**Vertical Change**	.49"	5 ft	16	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101231	ROOSEVELT AVE	SUNRISE AVE	S LAKE ST	114

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50677	142.6 to 143.6 feet	Protruding Object	40"	5 ft	5	JOB	$99	**$99**
50627	144.2 to 145.2 feet	Vertical Change	-.28"	5 ft	5	REF		
50649	144.3 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
50650	149.5 to 161.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
50628	150.3 to 151.3 feet	Vertical Change	.55"	5 ft	5	REF		
50629	160.8 to 161.8 feet	Vertical Change	1.1"	5 ft	5	REF		
50651	161.7 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
50652	182.8 to 195.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
50630	186.8 to 187.8 feet	Vertical Change	.3"	5 ft	5	REF		
50653	198.9 to 200.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50654	202.5 to 205.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
50655	205.7 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
50674	209.3 to 230.8 feet	Key Note Segment		5 ft	108			
50656	235.5 to 242.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
50657	244.8 to 263.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
50658	263.5 to 273.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
50675	273.2 to 292.9 feet	Key Note Segment		5 ft	98			
50631	275.6 to 276.6 feet	Vertical Change	1.02"	5 ft	5	REF		
50659	299.6 to 307.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
50660	310.3 to 317.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
50661	317.8 to 333.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
50676	334.3 to 352.6 feet	Key Note Segment		5 ft	92			
50662	352.6 to 359.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	37	SF	$40	**$1,460**
50663	361.6 to 386.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
50664	387.3 to 394.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
50665	394.7 to 395.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
50666	398.6 to 401.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
50667	401.2 to 405.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2106101231	ROOSEVELT AVE	SUNRISE AVE	S LAKE ST	114

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50668	419.6 to 421.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
50632	424.6 to 425.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
50669	426.9 to 432.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
50670	434.8 to 437.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
50671	440.0 to 441.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
50672	445.7 to 446.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **ROOSEVELT AVE** *Starting at:* **SUNRISE AVE** **$164,121.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108130941	ROOSEVELT AVE	VARBELLA WAY	OLIVE AVE	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61339	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
61340	4.7 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
61341	19.4 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
61342	21.8 to 73.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	256	SF	$120	**$30,720**
61338	76.4 to 77.4 feet	**Vertical Change**	1.23"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **ROOSEVELT AVE** *Starting at:* **VARBELLA WAY** **$37,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101358	ROSE ST	CROSS ST	830 CROSS ST	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131810	0.5 to 6.1 feet	Vertical Change	.29"	5 ft	28	LF	$75	$2,100
131815	2.3 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
131811	8.2 to 9.2 feet	Vertical Change	.35"	5 ft	5	REF		
131816	13.1 to 14.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$240
131817	15.0 to 16.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$220
131813	20.0 to 21.0 feet	Vertical Change	.26"	5 ft	5	REF		
131818	22.3 to 23.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$280
131819	28.6 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
131820	32.1 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
131814	45.3 to 46.3 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375
131821	46.5 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,780
131822	68.8 to 97.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	$17,340
131823	100.3 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720

TOTAL COST FOR: SW *side of* **ROSE ST** *Starting at:* **CROSS ST** **$45,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241118	ROTAN AVE	1501 FIFTH ST	FIFTH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106920	2.8 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
106921	5.7 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
106922	11.2 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
106923	15.3 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
106924	24.8 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
106934	28.8 to 38.1 feet	Key Note Segment		4 ft	37			
106925	38.1 to 39.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	7	SF	$40	**$272**
106916	40.8 to 41.8 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
106926	42.9 to 48.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,640**
106917	45.1 to 46.1 feet	**Vertical Change**	.29"	4 ft	4	REF		
106927	48.8 to 51.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
106918	51.6 to 52.6 feet	**Vertical Change**	.34"	4 ft	4	LF	$75	**$300**
106928	54.8 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	**$13,200**
106929	82.3 to 85.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,488**
106930	86.4 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
106931	96.1 to 119.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	93	SF	$120	**$11,136**
106919	103.4 to 104.4 feet	**Vertical Change**	.61"	4 ft	4	REF		
106932	120.3 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
106933	125.7 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**

TOTAL COST FOR: W *side of* **ROTAN AVE** *Starting at:* **1501 FIFTH ST** **$47,192.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241218	ROTAN AVE	1501 HOWARD RD	HOWARD RD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107139	0.2 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
107135	0.8 to 1.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
107136	15.2 to 16.2 feet	**Vertical Change**	3.52"	5 ft	5	SF	$75	**$375**
107140	16.9 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
107141	31.7 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
107137	48.3 to 49.3 feet	**Vertical Change**	-.43"	5 ft	5	REF		
107142	57.6 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
107143	73.9 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
107145	78.3 to 100.8 feet	Key Note Segment		5 ft	113			
107138	78.7 to 79.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
107144	103.8 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**

TOTAL COST FOR: E *side of* **ROTAN AVE** *Starting at:* **1501 HOWARD RD** **$38,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241520	ROTAN AVE	413 ROTAN AVE	417 ROTAN AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107465	2.3 to 15.5 feet	Key Note Segment		5 ft	66			
107450	15.1 to 16.1 feet	Vertical Change	-.38"	5 ft	5	REF		
107459	17.6 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
107460	20.5 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
107451	24.6 to 25.6 feet	Vertical Change	.3"	5 ft	5	REF		
107452	28.9 to 29.9 feet	Vertical Change	.26"	5 ft	5	REF		
107461	34.2 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
107453	37.6 to 38.6 feet	Vertical Change	.26"	5 ft	5	REF		
107455	41.9 to 42.9 feet	Vertical Change	.26"	5 ft	5	REF		
107457	48.3 to 51.6 feet	Vertical Change	.26"	5 ft	17	REF		
107462	52.1 to 53.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
107463	59.3 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
107464	62.9 to 65.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
107458	63.5 to 64.5 feet	Vertical Change	-.49"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ROTAN AVE** *Starting at:* **413 ROTAN AVE** **$18,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241112	ROTAN AVE	FIFTH ST	1425 ROTAN AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106898	0.0 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	178	SF	$120	**$21,312**
106892	1.7 to 2.7 feet	**Vertical Change**	3.07"	4 ft	4	REF		
106893	28.3 to 29.3 feet	**Vertical Change**	-.4"	4 ft	4	REF		
106894	43.5 to 44.5 feet	**Vertical Change**	-.5"	4 ft	4	REF		
106899	46.9 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
106900	65.8 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
106901	70.0 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
106903	81.8 to 101.8 feet	Key Note Segment		4 ft	80			
106895	82.6 to 83.6 feet	**Vertical Change**	.41"	4 ft	4	REF		
106902	107.1 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	72	SF	$120	**$8,592**
106896	110.1 to 111.1 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
106897	118.3 to 119.3 feet	**Vertical Change**	.35"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **ROTAN AVE** *Starting at:* **FIFTH ST** **$43,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241115	ROTAN AVE	FOURTH ST	1500 ROTAN AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106906	1.8 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
106907	10.2 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
106904	11.4 to 12.4 feet	**Vertical Change**	1.91"	4 ft	4	REF		
106908	18.4 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
106909	31.8 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
106910	40.8 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
106911	47.3 to 85.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	153	SF	$120	**$18,336**
106912	88.9 to 91.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	10	SF	$40	**$384**
106915	93.8 to 111.0 feet	Key Note Segment		4 ft	69			
106905	104.7 to 105.7 feet	**Vertical Change**	1.96"	4 ft	4	REF		
106913	111.3 to 114.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	14	SF	$40	**$544**
106914	120.3 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: W *side of* **ROTAN AVE** *Starting at:* **FOURTH ST** **$33,616.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241313	ROTAN AVE	HOWARD RD	1500 HOWARD RD	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107285	22.4 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
107286	44.9 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
107287	66.6 to 70.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

TOTAL COST FOR: W *side of* **ROTAN AVE** *Starting at:* **HOWARD RD** **$15,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241322	ROTAN AVE	OAK ST	HOWARD RD	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107300	0.2 to 1.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
107301	1.5 to 9.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
107296	6.6 to 7.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
107302	12.2 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
107303	29.1 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
107304	54.9 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,220**
107305	84.9 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
107306	113.6 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
107307	129.8 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
107308	150.2 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
107312	170.9 to 203.4 feet	Key Note Segment		5 ft	163			
107309	205.0 to 242.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	185	SF	$120	**$22,200**
107298	228.1 to 229.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
107310	244.3 to 255.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
107313	256.3 to 281.0 feet	Key Note Segment		5 ft	124			
107311	283.3 to 322.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	195	SF	$120	**$23,400**

TOTAL COST FOR: E *side of* **ROTAN AVE** *Starting at:* **OAK ST** **$104,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121326	ROYAL DR	UNIVERSITY AVE	W PARK DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95682	0.1 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95683	7.7 to 51.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	218	SF	$120	**$26,100**
95662	8.9 to 9.9 feet	**Vertical Change**	.56"	5 ft	5	REF		
95684	51.2 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
95685	61.5 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,460**
95686	70.6 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
95663	79.9 to 80.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
95687	83.0 to 91.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
95664	93.4 to 94.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
95688	97.0 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
95713	116.3 to 144.1 feet	Key Note Segment		5 ft	139			
95689	152.2 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
95666	153.4 to 154.4 feet	**Vertical Change**	-.48"	5 ft	5	REF		
95667	162.9 to 163.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
95668	172.9 to 173.9 feet	**Vertical Change**	.64"	5 ft	5	REF		
95714	187.6 to 207.4 feet	Key Note Segment		5 ft	99			
95669	188.0 to 189.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
95690	209.8 to 210.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
95691	211.2 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
95670	215.9 to 216.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
95692	220.0 to 240.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
95715	244.0 to 263.7 feet	Key Note Segment		5 ft	99			
95671	254.6 to 255.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
95693	265.1 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
95716	279.8 to 299.6 feet	Key Note Segment		5 ft	99			
95672	290.2 to 291.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
95673	299.6 to 300.6 feet	**Vertical Change**	.55"	5 ft	5	REF		
95694	301.0 to 329.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121326	ROYAL DR	UNIVERSITY AVE	W PARK DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95674	315.5 to 316.5 feet	Vertical Change	-.3"	5 ft	5	REF		
95717	337.3 to 357.8 feet	Key Note Segment		5 ft	103			
95695	358.7 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
95696	373.1 to 377.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
95697	379.4 to 381.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
95698	383.5 to 386.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
95699	387.4 to 389.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
95700	390.0 to 397.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
95675	393.9 to 394.9 feet	Vertical Change	.3"	5 ft	5	REF		
95718	397.8 to 418.6 feet	Key Note Segment		5 ft	104			
95676	397.9 to 398.9 feet	Vertical Change	.28"	5 ft	5	REF		
95701	423.8 to 429.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
95702	429.3 to 430.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
95703	433.0 to 443.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
95704	445.9 to 456.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
95719	456.8 to 478.2 feet	Key Note Segment		5 ft	107			
95677	467.4 to 468.4 feet	Vertical Change	.31"	5 ft	5	REF		
95678	477.0 to 478.0 feet	Vertical Change	.27"	5 ft	5	REF		
95705	479.1 to 482.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
95679	485.0 to 486.0 feet	Vertical Change	.51"	5 ft	5	SF	$75	**$375**
95680	489.3 to 490.3 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
95706	491.3 to 509.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
95720	514.4 to 535.0 feet	Key Note Segment		5 ft	103			
95681	524.9 to 525.9 feet	Vertical Change	.28"	5 ft	5	REF		
95707	535.3 to 537.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	**$400**
95708	541.3 to 544.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
95709	547.5 to 568.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
95721	571.0 to 591.9 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121326	ROYAL DR	UNIVERSITY AVE	W PARK DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95710	593.2 to 599.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
95711	603.3 to 609.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
95712	614.1 to 617.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: W *side of* **ROYAL DR** *Starting at:* **UNIVERSITY AVE** **$198,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121300	ROYAL DR	W PARK DR	UNIVERSITY AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95398	2.1 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
95399	6.6 to 14.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,620**
95400	14.3 to 22.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
95433	23.8 to 43.4 feet	Key Note Segment		5 ft	98			
95401	44.8 to 46.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
95402	46.7 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
95403	55.1 to 64.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
95404	68.2 to 71.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
95382	71.9 to 72.9 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
95405	74.6 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
95434	81.0 to 100.9 feet	Key Note Segment		5 ft	100			
95383	91.1 to 92.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
95406	105.8 to 113.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
95435	113.0 to 132.7 feet	Key Note Segment		5 ft	98			
95384	123.0 to 124.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
95407	136.3 to 151.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
95408	151.5 to 166.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
95436	167.0 to 187.2 feet	Key Note Segment		5 ft	101			
95409	190.3 to 199.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
95385	198.9 to 199.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
95410	202.0 to 214.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
95411	218.3 to 224.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
95412	224.5 to 225.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
95386	224.8 to 225.8 feet	**Vertical Change**	-.52"	5 ft	5	REF		
95413	228.2 to 241.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
95437	241.5 to 261.5 feet	Key Note Segment		5 ft	100			
95387	251.8 to 252.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
95388	261.5 to 262.5 feet	**Vertical Change**	.36"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121300	ROYAL DR	W PARK DR	UNIVERSITY AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95414	262.5 to 264.4 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	9	SF	$40	$380
95415	267.5 to 278.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	$6,360
95438	278.6 to 297.8 feet	Key Note Segment		5 ft	96			
95389	288.6 to 289.6 feet	Vertical Change	.33"	5 ft	5	REF		
95416	299.3 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
95417	304.9 to 329.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	$14,700
95418	331.7 to 347.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,180
95419	347.0 to 348.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
95439	349.3 to 369.8 feet	Key Note Segment		5 ft	103			
95420	370.4 to 388.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	90	SF	$40	$3,600
95421	391.8 to 412.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	$12,360
95390	403.0 to 404.0 feet	Vertical Change	.28"	5 ft	5	REF		
95422	414.7 to 416.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,020
95423	418.5 to 423.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,820
95424	426.5 to 439.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	$8,040
95391	427.8 to 428.8 feet	Vertical Change	.36"	5 ft	5	REF		
95440	439.9 to 459.7 feet	Key Note Segment		5 ft	99			
95392	441.0 to 442.0 feet	Vertical Change	-.34"	5 ft	5	REF		
95393	460.0 to 461.0 feet	Vertical Change	.26"	5 ft	5	REF		
95425	461.8 to 478.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	$10,200
95426	479.4 to 480.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
95427	482.9 to 490.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,440
95441	490.3 to 509.7 feet	Key Note Segment		5 ft	97			
95394	491.4 to 492.4 feet	Vertical Change	-.41"	5 ft	5	REF		
95395	501.1 to 502.1 feet	Vertical Change	.26"	5 ft	5	REF		
95396	510.3 to 511.3 feet	Vertical Change	.33"	5 ft	5	REF		
95428	511.6 to 513.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
95429	515.1 to 523.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,220

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121300	ROYAL DR	W PARK DR	UNIVERSITY AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95430	524.3 to 539.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
95442	543.0 to 572.9 feet	Key Note Segment		5 ft	150			
95397	572.9 to 573.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95431	573.6 to 587.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
95432	587.7 to 595.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: E *side of* **ROYAL DR** *Starting at:* **W PARK DR** **$178,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181654	RUBICON AVE	IVY GLEN DR	ALMOND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102341	1.5 to 2.5 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
102342	5.7 to 6.7 feet	Vertical Change	-.43"	5 ft	5	LF	$75	$375
102368	8.9 to 34.8 feet	Key Note Segment		5 ft	129			
102343	17.7 to 18.7 feet	Vertical Change	-.39"	5 ft	5	REF		
102344	24.2 to 25.2 feet	Vertical Change	.29"	5 ft	5	REF		
102353	38.8 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
102345	51.0 to 52.0 feet	Vertical Change	-.47"	5 ft	5	LF	$75	$375
102354	53.5 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
102355	63.3 to 74.1 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	54	SF	$120	$6,480
102346	71.3 to 72.3 feet	Vertical Change	.35"	5 ft	5	REF		
102356	74.5 to 76.5 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	10	SF	$120	$1,200
102357	78.0 to 85.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	35	SF	$120	$4,200
102358	86.8 to 87.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
102369	91.5 to 121.2 feet	Key Note Segment		5 ft	149			
102347	101.5 to 102.5 feet	Vertical Change	-.41"	5 ft	5	REF		
102359	121.6 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
102360	134.9 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,080
102348	149.2 to 150.2 feet	Vertical Change	.56"	5 ft	5	REF		
102361	154.7 to 162.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
102370	163.5 to 194.1 feet	Key Note Segment		5 ft	153			
102362	194.1 to 196.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
102371	197.4 to 221.2 feet	Key Note Segment		5 ft	119			
102349	209.8 to 210.8 feet	Vertical Change	.32"	5 ft	5	REF		
102363	221.2 to 229.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	41	SF	$40	$1,620
102350	238.8 to 239.8 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
102364	248.1 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	$8,220
102372	268.8 to 291.7 feet	Key Note Segment		5 ft	115			
102365	291.7 to 294.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	16	SF	$40	$640

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201181654	RUBICON AVE	IVY GLEN DR	ALMOND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102373	296.6 to 318.9 feet	Key Note Segment		5 ft	111			
102351	308.0 to 309.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
102366	320.5 to 332.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
102352	336.3 to 337.3 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
102367	341.3 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **RUBICON AVE** *Starting at:* **IVY GLEN DR** **$62,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261257	RUNNING BROOK DR	RIVERBANK DR	SHORESIDE DR	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109240	0.0 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
109238	14.3 to 15.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
109241	14.8 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109242	20.7 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
109239	23.7 to 24.7 feet	**Vertical Change**	1.84"	5 ft	5	REF		
109243	38.5 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
109244	50.7 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
109245	72.6 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
109246	82.5 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
109247	94.5 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
109248	131.0 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
109249	143.6 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
109250	168.8 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**

TOTAL COST FOR: S *side of* **RUNNING BROOK DR** *Starting at:* **RIVERBANK DR** **$54,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261246	RUNNING BROOK DR	SAN PIETRO DR	SAN PIETRO DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109170	7.6 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109166	8.0 to 9.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
109177	8.9 to 29.1 feet	Key Note Segment		5 ft	101			
109171	30.8 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109172	35.0 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
109173	42.6 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
109167	43.4 to 44.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
109178	44.7 to 64.3 feet	Key Note Segment		5 ft	98			
109168	65.9 to 66.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109174	66.8 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
109175	74.7 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
109169	84.6 to 85.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
109176	86.8 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **RUNNING BROOK DR** *Starting at:* **SAN PIETRO DR** **$14,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261255	RUNNING BROOK DR	SAN PIETRO DR	RIVERBANK DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109208	1.4 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
109192	2.2 to 3.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
109209	10.4 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
109193	13.0 to 14.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
109231	18.3 to 39.3 feet	Key Note Segment		5 ft	105			
109232	47.8 to 67.2 feet	Key Note Segment		5 ft	97			
109210	69.8 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
109211	102.4 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
109194	105.5 to 106.5 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
109212	107.0 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
109213	118.3 to 120.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
109214	124.4 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
109233	132.0 to 150.3 feet	Key Note Segment		5 ft	92			
109195	142.2 to 143.2 feet	**Vertical Change**	1.96"	5 ft	5	REF		
109196	152.2 to 153.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109215	152.5 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
109197	159.1 to 160.1 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
109234	159.8 to 178.7 feet	Key Note Segment		5 ft	94			
109216	183.2 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
109198	186.5 to 187.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
109217	190.8 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
109199	202.5 to 203.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
109200	207.4 to 208.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109201	211.2 to 212.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
109202	214.9 to 215.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
109218	215.8 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
109203	225.6 to 226.6 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
109219	231.0 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201261255	RUNNING BROOK DR	SAN PIETRO DR	RIVERBANK DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109204	234.3 to 235.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
109235	242.6 to 261.7 feet	Key Note Segment		5 ft	96			
109205	263.5 to 264.5 feet	Vertical Change	-.3"	5 ft	5	REF		
109220	264.0 to 265.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
109221	265.4 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
109236	270.0 to 289.0 feet	Key Note Segment		5 ft	95			
109222	290.6 to 303.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
109223	314.1 to 315.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
109224	319.5 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109225	323.2 to 324.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109226	327.1 to 328.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
109227	328.5 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
109206	329.6 to 330.6 feet	Vertical Change	.28"	5 ft	5	REF		
109228	333.3 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109229	340.2 to 345.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
109230	349.3 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
109237	352.9 to 372.8 feet	Key Note Segment		5 ft	100			
109207	374.7 to 375.7 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **RUNNING BROOK DR** *Starting at:* **SAN PIETRO DR** **$81,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201261333	RUNNING BROOK DR	SHORESIDE DR	SAN PIETRO DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109485	7.8 to 17.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
109482	31.7 to 32.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109483	40.3 to 41.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
109486	56.8 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109487	84.0 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
109488	107.6 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
109489	117.8 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109490	127.7 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,100**
109491	140.0 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
109492	146.0 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
109484	146.7 to 147.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
109493	167.3 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
109494	175.4 to 186.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**

TOTAL COST FOR: S *side of* **RUNNING BROOK DR** *Starting at:* **SHORESIDE DR** **$34,110.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021626	RUSH ST	1002 NEBRASKA AVE	N D ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119084	9.1 to 10.1 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
119086	20.3 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119087	29.2 to 45.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
119088	45.9 to 47.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
119092	47.7 to 57.8 feet	Key Note Segment		5 ft	51			
119085	48.6 to 49.6 feet	Vertical Change	1.73"	5 ft	5	REF		
119089	58.5 to 60.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$340**
119093	61.3 to 78.0 feet	Key Note Segment		5 ft	84			
119094	109.8 to 118.1 feet	Key Note Segment		5 ft	42			
119090	118.1 to 124.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	30	SF	$40	**$1,200**
119091	125.3 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**

TOTAL COST FOR: N *side of* **RUSH ST** *Starting at:* **1002 NEBRASKA AVE** **$23,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106100958	S A ST	10TH ST	11TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49620	0.5 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
49621	16.1 to 19.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
49622	28.3 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
49623	35.5 to 39.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
49624	40.8 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
49625	48.7 to 51.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
49646	51.6 to 77.4 feet	Key Note Segment		5 ft	129			
49626	79.0 to 81.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
49627	81.9 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
49628	94.8 to 115.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
49629	115.8 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
49608	123.2 to 124.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
49630	128.0 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
49609	138.9 to 139.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
49631	161.8 to 170.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,100**
49610	165.2 to 166.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
49611	168.9 to 169.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
49632	177.3 to 178.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
49612	179.2 to 180.2 feet	**Vertical Change**	-.59"	5 ft	5	SF	$75	**$375**
49633	182.5 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
49634	189.8 to 192.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
49613	194.3 to 195.3 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
49647	195.8 to 207.0 feet	Key Note Segment		5 ft	56			
49635	207.1 to 208.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
49636	209.2 to 214.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49614	216.3 to 217.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
49637	217.3 to 240.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
49615	224.8 to 225.8 feet	**Vertical Change**	.43"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106100958	S A ST	10TH ST	11TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49648	240.5 to 249.6 feet	Key Note Segment		5 ft	46			
49616	241.1 to 242.1 feet	Vertical Change	.36"	5 ft	5	REF		
49638	249.6 to 262.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	66	SF	$40	$2,640
49617	256.8 to 257.8 feet	Vertical Change	-.31"	5 ft	5	REF		
49618	259.1 to 260.1 feet	Vertical Change	.27"	5 ft	5	REF		
49639	262.8 to 270.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
49640	273.4 to 277.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
49641	277.3 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
49619	282.7 to 283.7 feet	Vertical Change	-.33"	5 ft	5	REF		
49649	291.2 to 317.2 feet	Key Note Segment		5 ft	130			
49642	317.3 to 320.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$640
49643	323.0 to 328.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
49644	331.2 to 333.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
49645	336.0 to 339.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **10TH ST** **$117,025.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100931	S A ST	11TH ST	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49439	1.7 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,760**
49440	34.3 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
49441	45.3 to 47.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
49463	50.0 to 60.6 feet	Key Note Segment		5 ft	53			
49442	64.5 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
49464	66.8 to 77.0 feet	Key Note Segment		5 ft	51			
49443	79.9 to 121.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	206	SF	$120	**$24,780**
49444	123.9 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
49465	131.6 to 146.9 feet	Key Note Segment		5 ft	77			
49437	140.0 to 141.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
49445	148.0 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
49446	163.1 to 169.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
49447	169.9 to 173.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
49448	174.3 to 177.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
49449	178.3 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
49450	185.2 to 190.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
49451	190.4 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,440**
49438	195.1 to 196.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
49452	233.6 to 240.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
49466	241.6 to 253.8 feet	Key Note Segment		5 ft	61			
49453	254.9 to 257.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
49454	257.8 to 262.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
49455	262.6 to 276.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,220**
49456	276.3 to 306.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,060**
49457	308.3 to 309.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
49458	313.1 to 349.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,720**
49459	351.9 to 363.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
49460	366.3 to 372.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106100931	S A ST	11TH ST	SUNRISE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49461	373.9 to 376.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49462	379.0 to 383.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: NW *side of* **S A ST** *Starting at:* **11TH ST** **$179,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101023	S A ST	11TH ST	12TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49803	0.9 to 26.1 feet	Key Note Segment		5 ft	126			
49782	26.2 to 56.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	153	SF	$40	**$6,100**
49774	35.7 to 36.7 feet	Vertical Change	.4"	5 ft	5	REF		
49775	53.0 to 54.0 feet	Vertical Change	.38"	5 ft	5	REF		
49776	54.7 to 55.7 feet	Vertical Change	-.34"	5 ft	5	REF		
49804	58.4 to 81.8 feet	Key Note Segment		5 ft	117			
49783	81.8 to 92.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
49784	95.0 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
49805	103.7 to 127.1 feet	Key Note Segment		5 ft	117			
49777	126.0 to 127.0 feet	Vertical Change	.27"	5 ft	5	REF		
49785	128.3 to 133.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
49786	136.3 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
49778	139.1 to 140.1 feet	Vertical Change	.3"	5 ft	5	REF		
49787	142.3 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49806	144.8 to 171.3 feet	Key Note Segment		5 ft	132			
49779	145.8 to 146.8 feet	Vertical Change	-.3"	5 ft	5	REF		
49788	173.2 to 183.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
49789	191.0 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49790	201.3 to 204.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
49791	211.4 to 214.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
49792	216.1 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
49793	222.5 to 231.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
49794	233.0 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
49807	236.6 to 260.2 feet	Key Note Segment		5 ft	118			
49795	261.2 to 278.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
49780	275.2 to 276.2 feet	Vertical Change	.34"	5 ft	5	REF		
49796	278.1 to 282.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
49797	287.8 to 291.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101023	S A ST	11TH ST	12TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49798	291.3 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
49781	299.9 to 300.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
49799	311.2 to 318.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
49800	321.8 to 327.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
49801	331.8 to 333.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
49802	333.7 to 335.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **11TH ST** **$77,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106100920	S A ST	12TH ST	11TH ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49335	0.5 to 1.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
49319	1.2 to 2.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
49336	2.2 to 10.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,220**
49320	9.8 to 10.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
49337	11.3 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49338	19.5 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
49321	27.6 to 28.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
49339	28.0 to 40.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
49340	56.0 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
49361	61.3 to 71.8 feet	Key Note Segment		5 ft	53			
49341	75.3 to 77.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
49322	77.3 to 78.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
49342	78.9 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,340**
49362	104.4 to 115.4 feet	Key Note Segment		5 ft	55			
49323	110.2 to 111.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
49343	115.4 to 130.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	75	SF	$40	**$2,980**
49344	136.8 to 141.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
49345	142.0 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
49346	152.3 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49366	159.8 to 161.1 feet		7.0-8.0%	5 ft	6			
49363	161.8 to 171.5 feet	Key Note Segment		5 ft	48			
49324	161.9 to 162.9 feet	**Vertical Change**	-.46"	5 ft	5	REF		
49347	171.8 to 174.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
49348	181.2 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49325	188.5 to 189.5 feet	**Vertical Change**	2.82"	5 ft	5	REF		
49349	189.3 to 193.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
49350	196.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
49326	204.9 to 205.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106100920	S A ST	12TH ST	11TH ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49327	212.0 to 213.0 feet	Vertical Change	-.43"	5 ft	5	LF	$75	$375
49351	213.5 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
49352	224.9 to 241.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	$9,660
49328	231.4 to 232.4 feet	Vertical Change	.31"	5 ft	5	REF		
49353	241.4 to 245.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
49364	245.3 to 252.4 feet	Key Note Segment		5 ft	36			
49354	252.4 to 263.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	53	SF	$40	$2,120
49329	262.8 to 263.8 feet	Vertical Change	1.12"	5 ft	5	REF		
49355	265.3 to 267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
49356	278.4 to 282.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
49365	282.5 to 293.0 feet	Key Note Segment		5 ft	53			
49330	283.6 to 284.6 feet	Vertical Change	.39"	5 ft	5	REF		
49331	293.1 to 294.1 feet	Vertical Change	.48"	5 ft	5	REF		
49332	297.7 to 298.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
49333	304.2 to 305.2 feet	Vertical Change	.39"	5 ft	5	REF		
49357	304.7 to 305.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
49358	309.3 to 310.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
49359	310.8 to 314.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	$2,400
49360	316.4 to 344.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	142	SF	$120	$17,040
49334	338.5 to 339.5 feet	Vertical Change	.37"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **12TH ST** **$95,205.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101047	S A ST	12TH ST	13TH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49949	0.2 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
49950	21.1 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49973	46.6 to 55.2 feet	Key Note Segment		5 ft	43			
49939	55.3 to 56.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
49951	56.6 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49940	62.9 to 63.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
49952	63.5 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
49941	68.8 to 69.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
49953	76.1 to 85.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
49954	85.7 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
49942	96.5 to 97.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
49977	99.4 to 100.4 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
49955	104.6 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
49956	109.5 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
49957	117.3 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49958	121.3 to 125.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
49974	126.3 to 147.3 feet	Key Note Segment		5 ft	105			
49959	147.5 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
49960	169.1 to 178.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
49943	169.8 to 170.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
49961	184.9 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
49962	192.4 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
49963	196.8 to 201.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
49975	201.5 to 210.8 feet	Key Note Segment		5 ft	47			
49944	202.1 to 203.1 feet	**Vertical Change**	.68"	5 ft	5	REF		
49964	210.8 to 214.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
49945	211.2 to 212.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
49965	216.9 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101047	S A ST	12TH ST	13TH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49966	226.6 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
49946	234.3 to 235.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
49967	240.3 to 242.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
49947	241.9 to 242.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
49968	242.8 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
49976	251.6 to 268.0 feet	Key Note Segment		5 ft	82			
49969	268.1 to 286.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	93	SF	$40	**$3,740**
49970	288.4 to 292.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
49948	309.6 to 310.6 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
49971	320.3 to 325.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
49972	329.5 to 342.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **12TH ST** **$91,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101110	S A ST	13TH ST	ROOSEVELT AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50130	0.4 to 1.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
50131	2.9 to 4.9 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	10	SF	$120	**$1,200**
50132	7.6 to 8.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	**$720**
50128	8.0 to 9.0 feet	**Vertical Change**	-.57"	5 ft	5	REF		
50133	11.7 to 17.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
50134	21.0 to 26.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
50129	24.3 to 25.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
50135	26.8 to 33.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,200**
50137	35.2 to 59.7 feet	Key Note Segment		5 ft	122			
50136	60.8 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **13TH ST** **$14,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111232	S A ST	1470 S A ST	TOZER ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59347	7.5 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
59348	15.3 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
59349	20.9 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
59350	28.3 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
59359	35.3 to 55.8 feet	Key Note Segment		5 ft	103			
59340	45.8 to 46.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
59351	57.0 to 62.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
59360	62.0 to 83.1 feet	Key Note Segment		5 ft	106			
59352	84.8 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,160**
59353	118.4 to 125.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
59361	126.5 to 155.8 feet	Key Note Segment		5 ft	147			
59341	141.3 to 142.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
59354	156.5 to 160.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	22	SF	$40	**$860**
59362	160.8 to 190.8 feet	Key Note Segment		5 ft	150			
59342	161.9 to 162.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
59355	207.8 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
59356	219.7 to 220.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
59357	222.4 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
59363	229.8 to 259.5 feet	Key Note Segment		5 ft	149			
59343	230.8 to 231.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
59344	245.0 to 246.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
59345	256.5 to 257.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
59364	265.1 to 285.8 feet	Key Note Segment		5 ft	103			
59346	303.0 to 304.0 feet	**Vertical Change**	2.44"	5 ft	5	SF	$75	**$375**
59358	304.9 to 307.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: S *side of* **S A ST** *Starting at:* **1470 S A ST** **$43,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101041	S A ST	213 S A ST	213 S A ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55618	0.0 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
55619	1.5 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
55615	1.9 to 2.9 feet	**Vertical Change**	.84"	5 ft	5	REF		
55616	5.0 to 6.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
55617	13.3 to 14.3 feet	**Vertical Change**	1.23"	5 ft	5	SF	$75	**$375**
55620	23.7 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **213 S A ST** **$11,610.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101043	S A ST	213 S A ST	6TH ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55625	3.2 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55629	29.8 to 40.0 feet	Key Note Segment		5 ft	51			
55626	51.7 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
55621	55.8 to 56.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
55622	59.9 to 60.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
55627	95.0 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
55630	107.3 to 114.3 feet	Key Note Segment		5 ft	35			
55623	120.4 to 121.4 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
55628	125.2 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
55624	140.8 to 141.8 feet	**Vertical Change**	.4"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **213 S A ST** **$34,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101040	S A ST	301 S A ST	301 S A ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55609	1.9 to 2.9 feet	**Vertical Change**	2.5"	5 ft	5	SF	$75	**$375**
55612	8.7 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
55610	10.1 to 11.1 feet	**Vertical Change**	.44"	5 ft	5	REF		
55611	15.0 to 16.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
55613	15.5 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
55614	24.7 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **301 S A ST** **$7,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101047	S A ST	6TH ST	E YOSEMITE AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55653	0.1 to 25.1 feet	Key Note Segment		5 ft	125			
55635	27.5 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
55636	67.7 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
55637	101.9 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
55657	115.1 to 116.2 feet		6.0-7.0%	5 ft	6			
55631	116.3 to 117.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
55638	117.8 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
55654	126.0 to 133.0 feet	Key Note Segment		5 ft	35			
55639	134.0 to 137.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
55655	137.0 to 148.8 feet	Key Note Segment		5 ft	59			
55640	149.2 to 151.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	10	SF	$40	**$380**
55641	151.4 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
55642	163.9 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
55643	177.6 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55644	198.4 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
55656	213.2 to 225.8 feet	Key Note Segment		5 ft	63			
55634	229.5 to 230.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
55645	232.6 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
55646	239.0 to 256.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
55647	257.0 to 264.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
55648	264.2 to 266.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,620**
55649	270.1 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
55650	278.1 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55651	280.9 to 288.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
55652	289.3 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
55658	289.8 to 291.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **6TH ST** **$64,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101057	S A ST	6TH ST	CLINTON ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55702	3.9 to 14.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
55703	14.2 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
55676	42.0 to 43.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
55677	46.6 to 50.4 feet	**Vertical Change**	.38"	5 ft	19	LF	$75	**$1,425**
55704	48.9 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55705	52.2 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
55678	52.6 to 53.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
55679	56.1 to 57.1 feet	**Vertical Change**	.8"	5 ft	5	SF	$75	**$375**
55680	58.5 to 59.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
55681	61.6 to 62.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
55706	62.8 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
55682	64.8 to 65.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
55754	66.7 to 75.2 feet	Key Note Segment		5 ft	43			
55707	78.1 to 83.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
55755	84.1 to 92.8 feet	Key Note Segment		5 ft	44			
55708	102.1 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
55709	108.3 to 112.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
55710	112.3 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55711	117.0 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
55712	131.8 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
55683	135.2 to 136.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
55684	141.2 to 142.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
55713	154.7 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
55686	165.5 to 166.5 feet	**Vertical Change**	1.96"	5 ft	5	SF	$75	**$375**
55714	167.7 to 169.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
55715	169.9 to 171.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55716	173.6 to 178.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
55759	175.8 to 177.9 feet		6.0-7.0%	5 ft	11			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101057	S A ST	6TH ST	CLINTON ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55760	175.8 to 177.9 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
55717	178.1 to 182.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
55718	182.2 to 185.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
55687	183.8 to 184.8 feet	**Vertical Change**	.72"	5 ft	5	REF		
55719	185.2 to 186.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
55720	186.3 to 191.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
55688	191.5 to 192.5 feet	**Vertical Change**	-1.36"	5 ft	5	REF		
55756	191.9 to 204.2 feet	Key Note Segment		5 ft	62			
55689	228.1 to 229.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
55721	231.6 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
55757	243.8 to 252.4 feet	Key Note Segment		5 ft	43			
55722	268.8 to 273.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
55723	281.8 to 283.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55690	317.3 to 318.3 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
55724	322.6 to 335.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
55725	338.1 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
55726	367.5 to 369.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
55727	373.3 to 374.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55728	380.2 to 397.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
55729	408.9 to 410.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55730	431.8 to 453.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
55731	456.9 to 458.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
55732	460.5 to 476.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,540**
55691	477.0 to 478.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
55733	478.8 to 480.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
55734	481.5 to 491.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
55735	493.8 to 495.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
55692	494.2 to 495.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101057	S A ST	6TH ST	CLINTON ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55736	500.3 to 527.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,380**
55693	528.6 to 529.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
55737	528.7 to 555.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
55694	545.7 to 546.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
55738	555.7 to 568.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
55739	569.0 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
55740	572.9 to 578.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
55695	580.2 to 581.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
55741	580.7 to 582.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
55742	584.6 to 596.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
55696	588.6 to 589.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
55743	598.8 to 627.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
55758	641.4 to 654.7 feet	Key Note Segment		5 ft	67			
55761	658.3 to 659.3 feet		6.0-7.0%	5 ft	5			
55697	660.9 to 661.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
55744	661.1 to 662.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
55745	665.0 to 673.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
55698	667.4 to 668.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
55746	677.5 to 679.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
55747	684.6 to 687.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
55748	695.5 to 697.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
55699	696.0 to 697.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
55749	700.3 to 704.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
55700	704.0 to 705.0 feet	**Vertical Change**	-.48"	5 ft	5	REF		
55750	708.9 to 713.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55751	720.2 to 723.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
55752	740.8 to 762.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,900**
55701	760.1 to 761.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101057	S A ST	6TH ST	CLINTON ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55753	762.9 to 764.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
55762	777.0 to 778.6 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **6TH ST** **$246,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101039	S A ST	CLINTON ST	305 S A ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55574	0.0 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
55575	11.9 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
55554	19.5 to 20.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
55576	20.8 to 24.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
55577	24.5 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
55578	41.6 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
55599	61.3 to 79.3 feet	Key Note Segment		5 ft	90			
55555	62.5 to 63.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
55579	80.0 to 81.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
55600	84.3 to 91.9 feet	Key Note Segment		5 ft	38			
55580	92.4 to 121.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	146	SF	$40	**$5,840**
55556	122.5 to 123.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
55601	128.6 to 134.8 feet	Key Note Segment		5 ft	31			
55581	143.3 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55557	143.9 to 144.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
55582	146.8 to 151.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
55583	155.7 to 157.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
55584	169.9 to 172.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
55608	172.9 to 173.9 feet		6.0-7.0%	5 ft	5			
55558	175.0 to 176.0 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
55602	175.3 to 181.6 feet	Key Note Segment		5 ft	32			
55603	175.3 to 223.8 feet	Key Note Segment		5 ft	243			
55559	182.6 to 183.6 feet	**Vertical Change**	-.44"	5 ft	5	REF		
55585	188.6 to 200.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	59	SF	$40	**$2,340**
55586	200.3 to 208.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	43	SF	$40	**$1,700**
55587	215.9 to 218.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	13	SF	$40	**$520**
55588	220.7 to 222.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$420**
55560	231.3 to 232.3 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101039	S A ST	CLINTON ST	305 S A ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55561	250.2 to 251.2 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
55562	252.4 to 253.4 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
55563	254.6 to 255.6 feet	Vertical Change	-.53"	5 ft	5	SF	$75	$375
55564	256.6 to 257.6 feet	Vertical Change	.48"	5 ft	5	LF	$75	$375
55604	257.7 to 265.3 feet	Key Note Segment		5 ft	38			
55589	265.3 to 266.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$220
55565	265.6 to 266.6 feet	Vertical Change	-.29"	5 ft	5	REF		
55590	266.4 to 276.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
55591	281.5 to 289.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,740
55592	294.0 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
55566	299.7 to 300.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
55605	303.9 to 312.7 feet	Key Note Segment		5 ft	44			
55567	315.5 to 316.5 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
55568	324.4 to 325.4 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
55593	326.5 to 329.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
55594	335.6 to 338.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
55569	357.4 to 358.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
55595	360.7 to 363.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
55606	382.0 to 396.5 feet	Key Note Segment		5 ft	73			
55570	397.8 to 398.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
55596	402.2 to 414.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
55607	405.3 to 415.3 feet	Key Note Segment		5 ft	50			
55571	407.4 to 408.4 feet	Vertical Change	-.36"	5 ft	5	REF		
55597	434.7 to 437.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
55572	434.9 to 435.9 feet	Vertical Change	-.3"	5 ft	5	REF		
55598	439.7 to 441.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
55573	448.4 to 449.4 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **CLINTON ST** **$84,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101112	S A ST	CLINTON ST	424 S A ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55835	19.3 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
55836	33.2 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
55837	38.2 to 49.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,660**
55838	51.5 to 52.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
55854	58.4 to 89.3 feet	Key Note Segment		5 ft	155			
55839	89.3 to 109.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	103	SF	$40	**$4,100**
55822	90.4 to 91.4 feet	**Vertical Change**	.82"	5 ft	5	REF		
55823	110.6 to 111.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
55824	113.7 to 114.7 feet	**Vertical Change**	3.35"	5 ft	5	SF	$75	**$375**
55825	125.8 to 126.8 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
55826	127.6 to 128.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
55840	129.2 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55827	131.3 to 132.3 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
55855	153.3 to 162.3 feet	Key Note Segment		5 ft	45			
55841	162.3 to 163.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
55856	195.6 to 204.5 feet	Key Note Segment		5 ft	45			
55829	213.2 to 214.2 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
55842	215.7 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
55830	217.4 to 218.4 feet	**Vertical Change**	-.55"	5 ft	5	REF		
55843	224.3 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
55844	234.0 to 271.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	187	SF	$120	**$22,380**
55857	271.3 to 280.8 feet	Key Note Segment		5 ft	48			
55845	282.6 to 298.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
55846	299.8 to 307.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
55847	311.3 to 320.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
55858	320.9 to 329.7 feet	Key Note Segment		5 ft	44			
55848	330.9 to 334.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
55849	335.0 to 336.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101112	S A ST	CLINTON ST	424 S A ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55831	335.8 to 336.8 feet	Vertical Change	2.53"	5 ft	5	REF		
55859	336.1 to 343.6 feet	Key Note Segment		5 ft	38			
55850	349.6 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
55832	352.6 to 355.2 feet	Vertical Change	.28"	5 ft	13	REF		
55851	352.9 to 354.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
55852	358.2 to 365.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
55853	365.2 to 371.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
55833	365.4 to 366.4 feet	Vertical Change	.26"	5 ft	5	REF		
55834	372.7 to 373.7 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **CLINTON ST** **$84,365.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101051	S A ST	E YOSEMITE AVE	6TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55667	0.0 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
55668	6.0 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,160**
55659	28.8 to 29.8 feet	**Vertical Change**	-.41"	5 ft	5	REF		
55660	33.5 to 34.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
55669	65.9 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,740**
55670	91.5 to 116.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
55671	123.8 to 175.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	260	SF	$120	**$31,200**
55675	178.5 to 201.8 feet	Key Note Segment		5 ft	117			
55661	185.7 to 186.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
55662	204.2 to 205.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
55672	211.5 to 213.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
55673	215.6 to 218.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
55663	216.4 to 217.4 feet	**Vertical Change**	-.41"	5 ft	5	REF		
55674	221.6 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	381	SF	$120	**$45,720**
55664	229.7 to 230.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
55665	259.9 to 260.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
55666	290.9 to 291.9 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **E YOSEMITE AVE** **$130,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111229	S A ST	MARIPOSA ST	1470 S A ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59329	0.8 to 14.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
59326	1.5 to 2.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
59330	14.3 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
59327	17.3 to 18.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
59331	18.7 to 25.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
59338	25.2 to 53.8 feet	Key Note Segment		5 ft	143			
59332	54.5 to 84.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	148	SF	$40	**$5,900**
59333	86.1 to 92.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
59334	105.7 to 110.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
59335	113.4 to 114.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
59336	116.5 to 122.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
59339	122.8 to 143.7 feet	Key Note Segment		5 ft	104			
59337	144.5 to 150.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,200**

TOTAL COST FOR: S *side of* **S A ST** *Starting at:* **MARIPOSA ST** **$32,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106100904	S A ST	ROOSEVELT AVE	12TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49235	1.5 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
49236	6.7 to 33.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,320**
49230	16.9 to 17.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
49237	33.9 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
49238	42.7 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
49239	53.8 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
49240	67.6 to 73.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
49241	79.8 to 91.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
49242	94.0 to 107.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
49243	110.6 to 114.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
49244	117.0 to 139.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,380**
49245	141.5 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	307	SF	$120	**$36,780**
49231	201.1 to 202.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
49246	207.3 to 236.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
49247	236.5 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
49248	241.3 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
49249	265.3 to 270.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
49250	272.6 to 275.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
49251	278.1 to 291.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
49252	294.3 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
49253	308.7 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
49254	321.7 to 332.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
49232	329.2 to 330.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
49255	332.1 to 390.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	291	SF	$120	**$34,860**
49233	363.7 to 364.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
49234	387.4 to 388.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
49256	390.2 to 394.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
49257	397.7 to 410.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106100904	S A ST	ROOSEVELT AVE	12TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE	*side of* **S A ST**	*Starting at:* **ROOSEVELT AVE**						**$215,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101119	S A ST	SUNRISE AVE	413 S A ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55866	1.2 to 30.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,760**
55860	11.0 to 12.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
55867	31.5 to 38.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
55861	34.4 to 35.4 feet	**Vertical Change**	-.41"	5 ft	5	REF		
55899	39.3 to 58.3 feet	Key Note Segment		5 ft	95			
55868	58.3 to 73.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	75	SF	$40	**$3,000**
55869	73.3 to 77.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
55900	77.4 to 94.2 feet	Key Note Segment		5 ft	84			
55870	94.2 to 131.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	187	SF	$40	**$7,480**
55871	134.6 to 144.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
55872	146.4 to 147.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
55873	155.8 to 176.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,660**
55874	176.9 to 200.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
55875	203.9 to 211.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
55876	211.3 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
55877	219.4 to 230.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
55862	228.8 to 229.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
55878	230.7 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55879	234.0 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
55880	240.2 to 253.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
55881	255.8 to 257.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
55882	257.9 to 278.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
55883	278.7 to 283.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
55884	284.6 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
55885	301.3 to 305.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
55886	309.8 to 318.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
55887	321.3 to 322.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
55888	325.4 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101119	S A ST	SUNRISE AVE	413 S A ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55901	351.1 to 366.2 feet	Key Note Segment		5 ft	76			
55889	367.8 to 393.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
55890	399.1 to 423.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
55863	417.4 to 418.4 feet	**Vertical Change**	-.62"	5 ft	5	REF		
55865	422.8 to 423.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
55891	425.0 to 427.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
55892	431.7 to 432.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**
55893	434.8 to 439.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
55894	439.3 to 446.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
55895	448.5 to 461.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
55902	461.8 to 475.7 feet	Key Note Segment		5 ft	70			
55896	476.7 to 478.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
55897	479.0 to 484.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
55898	486.8 to 494.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**

TOTAL COST FOR: NE *side of* **S A ST** *Starting at:* **SUNRISE AVE** **$195,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106100933	S A ST	SUNRISE AVE	10TH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49467	0.1 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
49468	20.3 to 21.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: SW *side of* **S A ST** *Starting at:* **SUNRISE AVE** **$10,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091543	S B ST	10TH ST	SUNRISE AVE	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48703	0.0 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
48692	12.1 to 13.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
48693	17.7 to 18.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
48704	18.1 to 22.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
48694	19.9 to 20.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
48705	23.9 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
48706	33.0 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
48695	36.8 to 37.8 feet	**Vertical Change**	3.48"	5 ft	5	REF		
48696	58.3 to 59.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
48707	67.6 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
48717	70.7 to 79.9 feet	Key Note Segment		5 ft	46			
48718	86.8 to 94.8 feet	Key Note Segment		5 ft	40			
48697	110.0 to 111.0 feet	**Vertical Change**	1.67"	5 ft	5	SF	$75	**$375**
48708	121.2 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
48709	126.3 to 127.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
48710	128.8 to 140.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
48698	132.0 to 133.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
48711	140.7 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
48699	145.1 to 146.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
48719	154.9 to 164.2 feet	Key Note Segment		5 ft	47			
48712	171.3 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
48713	179.3 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	238	SF	$120	**$28,500**
48721	185.9 to 187.2 feet		5.0-6.0%	5 ft	7			
48720	227.3 to 245.3 feet	Key Note Segment		5 ft	90			
48714	245.3 to 256.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
48700	245.5 to 246.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
48701	251.6 to 252.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
48702	268.8 to 269.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091543	S B ST	10TH ST	SUNRISE AVE	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48715	278.4 to 281.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
48716	281.8 to 285.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **10TH ST** **$67,525.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091634	S B ST	10TH ST	11TH ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49075	8.1 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
49076	24.6 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
49101	26.2 to 35.8 feet	Key Note Segment		5 ft	48			
49068	26.9 to 27.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
49077	35.9 to 39.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
49069	36.5 to 37.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
49078	40.5 to 49.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
49079	51.3 to 61.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	52	SF	$120	**$6,240**
49080	61.7 to 70.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	42	SF	$120	**$5,040**
49102	70.8 to 79.5 feet	Key Note Segment		5 ft	44			
49081	79.5 to 83.0 feet	**Cross Slope (Driveway)**	10.0-11.0%	5 ft	18	SF	$40	**$700**
49103	84.0 to 93.2 feet	Key Note Segment		5 ft	46			
49082	93.2 to 98.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	28	SF	$40	**$1,100**
49083	101.3 to 112.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
49084	112.4 to 116.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
49085	118.7 to 121.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
49086	123.6 to 148.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,640**
49104	148.1 to 157.3 feet	Key Note Segment		5 ft	46			
49087	157.4 to 161.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
49070	158.2 to 159.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
49088	161.4 to 170.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
49089	171.3 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49071	183.6 to 184.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
49090	188.5 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49091	194.3 to 201.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
49092	204.8 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49093	212.8 to 228.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
49094	229.5 to 242.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091634	S B ST	10TH ST	11TH ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49105	243.8 to 254.7 feet	Key Note Segment		5 ft	55			
49095	254.7 to 257.7 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	15	SF	$40	**$600**
49106	257.7 to 265.3 feet	Key Note Segment		5 ft	38			
49096	265.3 to 266.8 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	8	SF	$40	**$300**
49072	266.0 to 267.0 feet	Vertical Change	-.26"	5 ft	5	REF		
49097	267.7 to 269.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
49098	270.2 to 271.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
49099	286.3 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
49100	301.2 to 303.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
49074	340.8 to 341.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **10TH ST** **$88,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091538	S B ST	11TH ST	10TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48664	2.0 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
48665	14.7 to 16.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
48666	16.7 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
48654	23.6 to 24.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
48667	28.6 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
48687	38.8 to 47.1 feet	Key Note Segment		5 ft	42			
48668	47.1 to 50.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$580**
48669	50.7 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
48670	72.3 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
48688	96.6 to 111.2 feet	Key Note Segment		5 ft	73			
48655	112.7 to 113.7 feet	**Vertical Change**	.96"	5 ft	5	SF	$75	**$375**
48671	116.1 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
48672	127.5 to 155.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
48673	158.1 to 164.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
48656	158.2 to 159.2 feet	**Vertical Change**	-.48"	5 ft	5	REF		
48657	166.3 to 167.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
48674	169.3 to 171.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
48689	173.5 to 180.6 feet	Key Note Segment		5 ft	36			
48658	173.9 to 174.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
48675	181.0 to 182.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
48676	182.7 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
48677	196.6 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
48678	209.0 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
48690	211.3 to 220.3 feet	Key Note Segment		5 ft	45			
48679	224.1 to 230.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
48680	233.4 to 240.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
48681	243.2 to 244.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
48682	244.7 to 253.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091538	S B ST	11TH ST	10TH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48691	253.8 to 264.5 feet	Key Note Segment		5 ft	54			
48659	254.5 to 255.5 feet	Vertical Change	.32"	5 ft	5	REF		
48683	264.5 to 266.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	**$400**
48660	264.8 to 265.8 feet	Vertical Change	.38"	5 ft	5	REF		
48684	268.7 to 297.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
48661	273.7 to 274.7 feet	Vertical Change	.27"	5 ft	5	REF		
48662	303.7 to 304.7 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
48685	315.4 to 318.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
48663	315.7 to 316.7 feet	Vertical Change	.36"	5 ft	5	REF		
48686	330.8 to 340.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **11TH ST** **$109,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091637	S B ST	11TH ST	12TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49110	24.4 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
49111	29.4 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
49112	41.0 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
49113	48.7 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,740**
49131	71.6 to 80.5 feet	Key Note Segment		5 ft	45			
49132	84.0 to 94.2 feet	Key Note Segment		5 ft	51			
49114	94.2 to 96.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	13	SF	$40	**$500**
49115	101.8 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
49116	118.9 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
49133	127.2 to 135.8 feet	Key Note Segment		5 ft	43			
49134	146.1 to 155.9 feet	Key Note Segment		5 ft	49			
49117	156.2 to 157.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$340**
49118	169.8 to 187.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
49119	190.7 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
49120	201.2 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
49135	211.6 to 221.7 feet	Key Note Segment		5 ft	51			
49121	221.7 to 222.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$240**
49122	222.9 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
49123	231.0 to 235.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
49124	235.9 to 237.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
49125	240.9 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
49126	249.9 to 256.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
49127	258.7 to 271.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
49128	275.3 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
49136	284.7 to 295.8 feet	Key Note Segment		5 ft	56			
49107	287.9 to 288.9 feet	Vertical Change	-.35"	5 ft	5	REF		
49129	297.5 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
49130	302.9 to 338.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091637	S B ST	11TH ST	12TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49108	316.8 to 317.8 feet	Vertical Change	.26"	5 ft	5	REF		
49109	337.6 to 338.6 feet	Vertical Change	.26"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **11TH ST** **$102,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091534	S B ST	12TH ST	11TH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48635	6.6 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
48649	8.6 to 51.5 feet	Key Note Segment		5 ft	215			
48634	38.5 to 39.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
48636	52.3 to 57.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
48637	57.3 to 87.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
48638	94.9 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
48650	131.3 to 142.1 feet	Key Note Segment		5 ft	54			
48651	169.8 to 180.0 feet	Key Note Segment		5 ft	51			
48639	180.8 to 183.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
48640	184.7 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
48641	209.3 to 216.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
48652	217.3 to 226.0 feet	Key Note Segment		5 ft	44			
48642	226.0 to 231.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,160**
48643	231.8 to 244.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
48644	246.3 to 251.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
48645	253.9 to 276.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,320**
48646	277.2 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,820**
48647	300.0 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
48653	301.4 to 309.8 feet	Key Note Segment		5 ft	42			
48648	310.8 to 339.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	**$17,460**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **12TH ST** **$99,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091651	S B ST	12TH ST	13TH ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49138	0.4 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
49139	5.6 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
49156	70.2 to 78.0 feet	Key Note Segment		5 ft	39			
49140	80.8 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
49141	91.1 to 94.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
49142	94.5 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
49143	113.7 to 114.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
49157	115.3 to 125.0 feet	Key Note Segment		5 ft	49			
49144	133.5 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
49145	142.2 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
49158	150.8 to 164.5 feet	Key Note Segment		5 ft	68			
49137	152.4 to 153.4 feet	**Vertical Change**	-.44"	5 ft	5	REF		
49146	164.5 to 168.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$760**
49147	172.2 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
49159	197.6 to 207.3 feet	Key Note Segment		5 ft	49			
49148	207.3 to 214.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,520**
49149	217.8 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
49150	237.9 to 239.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
49151	243.9 to 255.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
49152	255.2 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49153	259.0 to 275.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
49160	275.3 to 291.1 feet	Key Note Segment		5 ft	79			
49154	293.3 to 304.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
49161	304.9 to 319.3 feet	Key Note Segment		5 ft	72			
49155	319.5 to 340.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **12TH ST** **$103,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091530	S B ST	13TH ST	12TH ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48606	0.0 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,180**
48627	39.3 to 50.2 feet	Key Note Segment		5 ft	55			
48607	50.2 to 53.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
48608	61.5 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
48609	93.3 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
48628	126.2 to 139.2 feet	Key Note Segment		5 ft	65			
48610	139.4 to 140.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
48611	143.2 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
48612	148.1 to 163.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
48613	163.7 to 171.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
48614	171.7 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
48615	177.9 to 191.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
48629	191.7 to 202.0 feet	Key Note Segment		5 ft	52			
48616	202.3 to 210.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,580**
48600	202.4 to 203.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48630	212.6 to 223.8 feet	Key Note Segment		5 ft	56			
48617	224.7 to 226.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
48618	227.1 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
48619	238.2 to 241.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48631	277.3 to 289.3 feet	Key Note Segment		5 ft	60			
48601	285.3 to 286.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
48620	289.8 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
48602	291.8 to 292.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
48603	304.7 to 305.7 feet	**Vertical Change**	-3.11"	5 ft	5	REF		
48632	304.7 to 306.0 feet		5.0-6.0%	5 ft	7			
48621	305.1 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48622	308.1 to 311.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,740**
48623	314.3 to 316.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091530	S B ST	13TH ST	12TH ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48624	319.0 to 323.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
48625	324.3 to 326.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48604	330.3 to 331.3 feet	**Vertical Change**	-.78"	5 ft	5	SF	$75	**$375**
48633	330.8 to 331.9 feet		5.0-6.0%	5 ft	6			
48626	335.5 to 339.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
48605	337.0 to 338.0 feet	**Vertical Change**	.58"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **13TH ST** **$100,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091654	S B ST	13TH ST	14TH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49162	5.9 to 6.9 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
49169	26.3 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$10,980
49170	44.9 to 46.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
49171	48.3 to 49.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
49172	54.3 to 55.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
49173	56.3 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
49174	69.6 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
49163	112.0 to 113.0 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
49196	113.4 to 122.3 feet	Key Note Segment		5 ft	45			
49175	127.0 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
49176	139.9 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
49177	143.6 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
49197	157.1 to 166.3 feet	Key Note Segment		5 ft	46			
49178	167.2 to 169.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500
49179	172.3 to 174.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,440
49198	174.7 to 183.2 feet	Key Note Segment		5 ft	43			
49180	183.2 to 189.2 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	30	SF	$40	$1,200
49181	191.5 to 198.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,440
49182	198.9 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
49199	200.8 to 221.1 feet	Key Note Segment		5 ft	102			
49164	201.9 to 202.9 feet	Vertical Change	.26"	5 ft	5	REF		
49183	221.3 to 235.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	69	SF	$40	$2,740
49165	221.4 to 222.4 feet	Vertical Change	.27"	5 ft	5	REF		
49166	233.8 to 234.8 feet	Vertical Change	-.27"	5 ft	5	REF		
49184	235.3 to 238.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	$1,860
49185	240.6 to 253.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	$7,620
49200	256.4 to 263.4 feet	Key Note Segment		5 ft	35			
49167	259.1 to 260.1 feet	Vertical Change	.88"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091654	S B ST	13TH ST	14TH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49186	264.6 to 265.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
49168	264.8 to 265.8 feet	**Vertical Change**	.84"	5 ft	5	REF		
49187	266.0 to 269.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
49188	269.5 to 281.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
49189	284.3 to 299.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,120**
49201	299.5 to 308.7 feet	Key Note Segment		5 ft	46			
49190	309.3 to 313.8 feet	**Cross Slope (Driveway)**	8.0-9.0%	5 ft	23	SF	$40	**$900**
49191	316.3 to 319.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
49192	319.5 to 326.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
49193	326.8 to 328.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
49194	328.6 to 330.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
49195	336.3 to 338.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **13TH ST** **$87,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091557	S B ST	6TH ST	E YOSEMITE AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48796	37.2 to 38.2 feet	Vertical Change	-.72"	5 ft	5	SF	$75	**$375**
48797	50.0 to 51.0 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
48799	52.9 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
48800	79.0 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
48801	87.0 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
48802	124.3 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48814	126.4 to 149.3 feet	Key Note Segment		5 ft	115			
48803	151.4 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$20,040**
48804	187.1 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
48798	190.1 to 191.1 feet	Vertical Change	.78"	5 ft	5	SF	$75	**$375**
48805	195.2 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
48806	207.0 to 215.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
48807	215.5 to 231.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
48808	233.6 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
48809	242.0 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
48810	263.1 to 264.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
48811	265.5 to 267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
48812	278.2 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
48813	284.8 to 288.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **6TH ST** **$69,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091608	S B ST	6TH ST	CLINTON ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48870	0.0 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
48871	11.5 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
48872	33.5 to 37.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
48873	39.6 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
48874	42.7 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
48857	53.8 to 54.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
48875	57.4 to 62.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
48876	66.1 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
48877	70.3 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
48878	75.4 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48879	83.5 to 95.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
48880	97.7 to 105.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
48881	105.9 to 108.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48858	111.1 to 112.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
48882	113.3 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
48883	121.3 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
48884	125.8 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
48885	133.5 to 140.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
48859	137.5 to 138.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
48886	141.6 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48931	147.6 to 171.6 feet	Key Note Segment		5 ft	120			
48860	148.2 to 149.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
48887	178.3 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
48888	185.8 to 187.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48932	187.9 to 195.5 feet	Key Note Segment		5 ft	38			
48889	195.5 to 196.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
48890	201.0 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
48891	207.6 to 210.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091608	S B ST	6TH ST	CLINTON ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48892	211.5 to 214.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
48893	217.3 to 221.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
48894	226.2 to 229.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
48895	232.3 to 246.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
48861	251.3 to 252.3 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
48896	257.6 to 259.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
48862	263.6 to 264.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
48897	263.6 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48933	266.3 to 274.8 feet	Key Note Segment		5 ft	43			
48898	278.9 to 279.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
48899	280.9 to 281.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
48900	281.9 to 282.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
48901	296.3 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
48863	308.0 to 309.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
48902	325.9 to 329.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
48903	332.8 to 335.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
48904	338.0 to 340.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
48905	340.8 to 350.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
48906	350.3 to 360.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
48907	385.0 to 387.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
48908	387.9 to 389.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
48909	395.5 to 408.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
48910	409.3 to 410.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
48934	411.8 to 430.8 feet	Key Note Segment		5 ft	95			
48911	431.4 to 432.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
48912	438.8 to 440.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
48913	440.8 to 442.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
48914	445.8 to 449.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091608	S B ST	6TH ST	CLINTON ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48915	449.0 to 451.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48935	451.8 to 469.5 feet	Key Note Segment		5 ft	89			
48916	473.5 to 476.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
48917	481.2 to 489.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
48918	489.5 to 492.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
48936	616.5 to 625.4 feet	Key Note Segment		5 ft	45			
48864	617.3 to 618.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
48865	628.1 to 629.1 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
48919	647.2 to 650.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
48866	673.2 to 674.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
48920	675.3 to 677.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
48921	681.7 to 685.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
48922	685.4 to 687.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
48937	687.9 to 693.5 feet	Key Note Segment		5 ft	28			
48923	693.5 to 700.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	35	SF	$40	**$1,400**
48924	700.5 to 701.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48925	713.8 to 720.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
48867	727.2 to 728.2 feet	**Vertical Change**	.57"	5 ft	5	REF		
48926	727.5 to 739.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
48868	737.7 to 738.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
48927	753.0 to 787.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,520**
48869	760.7 to 761.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
48928	789.6 to 791.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48929	794.9 to 804.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
48930	806.5 to 811.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **6TH ST** **$175,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091631	S B ST	9TH ST	10TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
49048	0.0 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
49049	16.9 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
49050	21.8 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
49051	29.1 to 30.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
49045	29.7 to 30.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
49052	36.6 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
49053	65.9 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
49054	93.7 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49065	95.3 to 103.6 feet	Key Note Segment		5 ft	42			
49055	105.8 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
49056	118.8 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
49066	175.4 to 183.4 feet	Key Note Segment		5 ft	40			
49067	191.3 to 200.3 feet	Key Note Segment		5 ft	45			
49046	201.6 to 202.6 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
49057	230.3 to 231.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49058	235.2 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
49047	239.0 to 240.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
49059	246.6 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
49060	254.4 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
49061	258.8 to 300.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	208	SF	$120	**$24,900**
49062	300.9 to 304.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
49063	309.1 to 312.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
49064	319.0 to 337.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **9TH ST** **$69,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091554	S B ST	CLINTON ST	6TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48757	27.5 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
48758	42.8 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
48759	75.1 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
48744	170.1 to 171.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
48760	171.1 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
48761	177.6 to 183.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
48762	188.1 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
48745	202.9 to 203.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
48763	206.9 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
48795	214.8 to 216.0 feet		5.0-6.0%	5 ft	6			
48746	216.2 to 217.2 feet	**Vertical Change**	-1.14"	5 ft	5	SF	$75	**$375**
48786	216.2 to 237.4 feet	Key Note Segment		5 ft	106			
48764	238.3 to 240.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
48747	263.5 to 264.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
48748	268.7 to 269.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
48787	281.2 to 303.4 feet	Key Note Segment		5 ft	111			
48749	332.2 to 333.2 feet	**Vertical Change**	.86"	5 ft	5	SF	$75	**$375**
48765	335.2 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48750	337.6 to 338.6 feet	**Vertical Change**	-.76"	5 ft	5	SF	$75	**$375**
48788	347.7 to 369.8 feet	Key Note Segment		5 ft	111			
48766	369.8 to 371.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
48767	395.8 to 400.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
48789	400.6 to 418.4 feet	Key Note Segment		5 ft	89			
48768	418.4 to 428.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	52	SF	$40	**$2,080**
48769	429.0 to 436.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
48770	442.6 to 444.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
48771	445.0 to 448.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
48772	455.3 to 477.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091554	S B ST	CLINTON ST	6TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48773	481.8 to 498.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
48790	499.5 to 513.3 feet	Key Note Segment		5 ft	69			
48774	518.1 to 524.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
48775	550.9 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
48751	556.1 to 557.1 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
48791	558.6 to 567.1 feet	Key Note Segment		5 ft	43			
48752	559.5 to 560.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
48776	567.1 to 569.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
48777	569.0 to 571.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
48778	574.6 to 584.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
48792	602.3 to 610.7 feet	Key Note Segment		5 ft	42			
48753	622.9 to 623.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
48779	627.4 to 634.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
48793	636.1 to 659.2 feet	Key Note Segment		5 ft	116			
48780	659.2 to 695.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	180	SF	$40	**$7,200**
48754	697.8 to 698.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
48794	699.3 to 722.0 feet	Key Note Segment		5 ft	114			
48781	722.5 to 724.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
48782	726.4 to 751.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
48783	776.7 to 777.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48756	786.1 to 787.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
48784	787.3 to 795.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
48785	797.6 to 807.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **CLINTON ST** **$110,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091612	S B ST	CLINTON ST	9TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48938	43.7 to 44.7 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
48939	45.7 to 48.4 feet	Vertical Change	.35"	5 ft	14	LF	$75	$1,013
48944	80.3 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
48945	89.3 to 103.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	$8,220
48946	103.0 to 117.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,520
48963	118.0 to 128.9 feet	Key Note Segment		5 ft	55			
48940	127.3 to 128.3 feet	Vertical Change	-.27"	5 ft	5	REF		
48947	129.7 to 131.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
48948	134.5 to 137.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
48949	140.1 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
48950	147.9 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	$18,300
48941	163.7 to 164.7 feet	Vertical Change	.26"	5 ft	5	REF		
48964	178.4 to 193.8 feet	Key Note Segment		5 ft	77			
48951	193.8 to 195.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	$240
48952	196.0 to 216.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,300
48942	200.2 to 201.2 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
48953	219.3 to 220.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
48954	224.6 to 226.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
48955	228.8 to 245.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	$10,080
48956	250.7 to 252.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
48957	252.2 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
48965	263.4 to 273.8 feet	Key Note Segment		5 ft	52			
48958	275.0 to 276.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
48959	278.4 to 287.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	$5,400
48960	287.4 to 291.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
48961	293.1 to 301.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,220
48962	302.1 to 303.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
48943	305.2 to 306.2 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091612	S B ST	CLINTON ST	9TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **CLINTON ST**								**$91,177.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091600	S B ST	E YOSEMITE AVE	6TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48830	0.7 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
48815	3.0 to 4.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
48816	6.5 to 7.5 feet	**Vertical Change**	-.66"	5 ft	5	REF		
48831	7.4 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
48832	14.4 to 23.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
48817	14.5 to 15.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
48818	21.0 to 22.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
48833	24.4 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
48834	32.2 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
48819	32.5 to 33.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
48835	39.9 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
48836	45.6 to 48.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
48837	56.2 to 60.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
48838	62.8 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
48820	64.1 to 65.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
48839	67.9 to 72.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
48840	73.3 to 76.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
48853	79.3 to 105.1 feet	Key Note Segment		5 ft	129			
48821	80.1 to 81.1 feet	**Vertical Change**	-.37"	5 ft	5	REF		
48822	104.0 to 105.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
48841	107.6 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
48842	111.4 to 115.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
48823	119.0 to 120.0 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
48854	119.8 to 140.3 feet	Key Note Segment		5 ft	103			
48843	140.4 to 144.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$720**
48844	144.8 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
48824	149.8 to 150.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
48825	165.1 to 166.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091600	S B ST	E YOSEMITE AVE	6TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48855	177.0 to 189.8 feet	Key Note Segment		5 ft	64			
48826	179.7 to 180.7 feet	Vertical Change	.32"	5 ft	5	REF		
48827	186.0 to 188.9 feet	Vertical Change	.56"	5 ft	15	REF		
48845	191.7 to 193.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
48828	192.3 to 193.3 feet	Vertical Change	.33"	5 ft	5	REF		
48846	194.7 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
48847	203.1 to 204.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
48856	204.5 to 226.9 feet	Key Note Segment		5 ft	112			
48848	249.2 to 250.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48829	257.3 to 258.3 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
48849	260.3 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
48850	268.3 to 269.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48851	276.6 to 279.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48852	295.0 to 296.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: SW *side of* **S B ST** *Starting at:* **E YOSEMITE AVE** **$39,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091526	S B ST	ROOSEVELT AVE	13TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48565	0.0 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
48566	5.8 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
48567	14.2 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
48568	52.0 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
48569	60.2 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
48592	71.8 to 77.7 feet	Key Note Segment		5 ft	30			
48570	79.1 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
48593	84.4 to 93.3 feet	Key Note Segment		5 ft	45			
48571	93.3 to 113.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	102	SF	$40	**$4,080**
48572	115.9 to 127.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
48594	127.7 to 137.2 feet	Key Note Segment		5 ft	47			
48573	137.2 to 140.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	17	SF	$40	**$680**
48574	140.8 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
48575	166.1 to 170.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
48595	171.4 to 179.8 feet	Key Note Segment		5 ft	42			
48576	179.8 to 181.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
48558	180.5 to 181.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
48577	181.4 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
48578	189.5 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
48579	211.3 to 231.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
48596	231.8 to 247.7 feet	Key Note Segment		5 ft	80			
48560	240.3 to 241.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48561	249.2 to 250.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
48580	250.7 to 252.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
48562	254.3 to 255.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
48581	257.2 to 258.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
48582	260.6 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
48583	271.8 to 280.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091526	S B ST	ROOSEVELT AVE	13TH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48597	280.8 to 293.8 feet	Key Note Segment		5 ft	65			
48584	296.0 to 299.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
48585	299.9 to 300.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
48598	301.2 to 322.0 feet	Key Note Segment		5 ft	104			
48586	322.8 to 327.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
48587	330.3 to 333.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
48588	336.3 to 344.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
48589	345.7 to 349.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
48563	351.3 to 352.3 feet	**Vertical Change**	2.33"	5 ft	5	SF	$75	**$375**
48590	355.2 to 357.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
48591	360.1 to 365.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
48599	372.0 to 380.3 feet	Key Note Segment		5 ft	42			
48564	372.9 to 373.9 feet	**Vertical Change**	-.79"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **ROOSEVELT AVE** **$102,385.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091547	S B ST	SUNRISE AVE	CLINTON ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48729	0.0 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
48741	10.3 to 21.8 feet	Key Note Segment		5 ft	58			
48730	21.8 to 31.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	49	SF	$40	**$1,940**
48722	23.1 to 24.1 feet	Vertical Change	.4"	5 ft	5	REF		
48723	49.9 to 50.9 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
48724	126.1 to 127.1 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
48742	152.6 to 160.3 feet	Key Note Segment		5 ft	39			
48731	169.3 to 175.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
48732	216.5 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
48733	230.5 to 231.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
48734	233.0 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
48725	285.3 to 286.3 feet	Vertical Change	.52"	5 ft	5	SF	$75	**$375**
48726	289.7 to 290.7 feet	Vertical Change	.83"	5 ft	5	REF		
48735	290.3 to 292.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
48727	293.5 to 294.5 feet	Vertical Change	.83"	5 ft	5	REF		
48736	293.8 to 295.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
48737	295.8 to 298.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
48738	298.8 to 305.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
48743	305.7 to 307.1 feet		5.0-6.0%	5 ft	7			
48728	306.9 to 307.9 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
48739	314.3 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48740	329.1 to 331.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NE *side of* **S B ST** *Starting at:* **SUNRISE AVE** **$31,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091339	S C ST	10TH ST	9TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47912	21.0 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
47926	33.0 to 47.3 feet	Key Note Segment		5 ft	72			
47906	40.5 to 41.5 feet	**Vertical Change**	-.45"	5 ft	5	REF		
47913	47.3 to 66.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	96	SF	$40	**$3,820**
47927	66.8 to 80.3 feet	Key Note Segment		5 ft	68			
47907	67.2 to 68.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
47914	80.3 to 93.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	66	SF	$40	**$2,620**
47928	105.7 to 116.7 feet	Key Note Segment		5 ft	55			
47915	135.8 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
47916	147.2 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
47929	175.1 to 184.8 feet	Key Note Segment		5 ft	49			
47917	188.6 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
47909	211.2 to 212.2 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
47918	212.8 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
47910	223.2 to 224.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
47919	223.4 to 225.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47930	226.0 to 238.5 feet	Key Note Segment		5 ft	63			
47920	240.1 to 242.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
47921	268.3 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47922	272.3 to 274.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
47923	277.5 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
47924	292.7 to 302.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
47931	302.0 to 334.8 feet	Key Note Segment		5 ft	164			
47911	334.6 to 335.6 feet	**Vertical Change**	.67"	5 ft	5	REF		
47925	336.2 to 341.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **10TH ST** **$63,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091434	S C ST	10TH ST	11TH ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48257	0.0 to 4.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
48258	4.9 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,100**
48259	11.6 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
48278	25.9 to 37.9 feet	Key Note Segment		5 ft	60			
48260	48.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
48261	56.2 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
48262	85.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
48263	105.6 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
48264	134.3 to 145.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
48265	148.3 to 152.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
48266	155.0 to 178.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
48267	179.1 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48252	179.3 to 180.3 feet	**Vertical Change**	.55"	5 ft	5	REF		
48268	186.5 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
48253	191.0 to 192.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
48254	197.4 to 198.4 feet	**Vertical Change**	.55"	5 ft	5	REF		
48269	200.5 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
48255	212.8 to 213.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
48279	216.7 to 226.3 feet	Key Note Segment		5 ft	48			
48256	217.6 to 218.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
48270	237.8 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
48280	253.3 to 262.6 feet	Key Note Segment		5 ft	47			
48271	262.6 to 267.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$880**
48272	267.8 to 273.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
48273	277.6 to 295.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,860**
48274	295.7 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
48275	305.8 to 309.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
48276	313.2 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091434	S C ST	10TH ST	11TH ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48277	336.1 to 338.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **10TH ST** **$120,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091335	S C ST	11TH ST	10TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47869	2.8 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
47864	10.9 to 11.9 feet	**Vertical Change**	1.36"	5 ft	5	REF		
47870	17.1 to 24.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
47897	24.6 to 34.8 feet	Key Note Segment		5 ft	51			
47871	35.1 to 39.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
47872	41.4 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47898	44.8 to 59.0 feet	Key Note Segment		5 ft	71			
47865	59.1 to 60.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47873	68.9 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
47899	83.9 to 92.5 feet	Key Note Segment		5 ft	43			
47874	92.5 to 106.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	70	SF	$40	**$2,800**
47875	106.5 to 116.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
47876	116.5 to 122.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
47877	122.9 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
47903	124.0 to 125.4 feet		5.0-6.0%	5 ft	7			
47904	125.4 to 127.6 feet		6.0-7.0%	5 ft	11			
47905	125.4 to 127.6 feet	Running Slope	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
47900	128.7 to 139.2 feet	Key Note Segment		5 ft	53			
47878	140.8 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,420**
47866	149.3 to 150.3 feet	**Vertical Change**	1.51"	5 ft	5	REF		
47867	152.3 to 153.3 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
47879	154.1 to 156.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
47880	156.5 to 161.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
47881	163.6 to 166.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
47882	166.3 to 168.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
47883	181.1 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
47884	203.1 to 215.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
47901	216.0 to 225.5 feet	Key Note Segment		5 ft	48			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091335	S C ST	11TH ST	10TH ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47885	225.5 to 227.2 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	9	SF	$40	$340
47886	227.2 to 232.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,060
47887	239.3 to 257.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	93	SF	$120	$11,160
47902	258.5 to 267.3 feet	Key Note Segment		5 ft	44			
47888	267.3 to 273.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	30	SF	$40	$1,180
47889	273.2 to 279.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,660
47890	279.8 to 286.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	$4,200
47868	282.3 to 283.3 feet	Vertical Change	-.3"	5 ft	5	REF		
47891	287.5 to 293.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	$3,600
47892	295.2 to 305.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,060
47893	305.3 to 317.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380
47894	319.8 to 322.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,860
47895	323.3 to 328.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
47896	328.0 to 340.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	$7,320

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **11TH ST** **$123,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091438	S C ST	11TH ST	12TH ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48281	25.5 to 26.5 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
48282	34.2 to 35.2 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
48288	38.8 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
48289	45.8 to 54.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,220
48283	57.8 to 58.8 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
48302	59.8 to 77.1 feet	Key Note Segment		5 ft	86			
48290	77.9 to 96.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	$11,340
48291	98.6 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
48303	107.3 to 116.6 feet	Key Note Segment		5 ft	47			
48284	116.7 to 117.7 feet	Vertical Change	-.33"	5 ft	5	REF		
48285	129.7 to 130.7 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
48292	155.6 to 159.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
48293	163.3 to 173.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,940
48304	173.2 to 187.1 feet	Key Note Segment		5 ft	70			
48286	180.7 to 181.7 feet	Vertical Change	.48"	5 ft	5	REF		
48294	187.1 to 195.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	44	SF	$40	$1,760
48295	199.3 to 205.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
48296	208.8 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
48305	237.0 to 247.2 feet	Key Note Segment		5 ft	51			
48297	249.9 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
48306	264.8 to 285.5 feet	Key Note Segment		5 ft	104			
48287	286.1 to 287.1 feet	Vertical Change	.32"	5 ft	5	REF		
48298	288.5 to 297.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
48299	299.8 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
48300	314.5 to 320.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
48301	330.4 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **11TH ST** **$67,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091330	S C ST	12TH ST	11TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47833	0.1 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
47834	8.8 to 14.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
47824	11.4 to 12.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
47835	14.9 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
47836	36.2 to 41.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
47856	44.4 to 55.5 feet	Key Note Segment		5 ft	56			
47837	55.8 to 69.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	71	SF	$40	**$2,820**
47838	74.3 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
47839	85.3 to 87.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
47857	87.3 to 97.6 feet	Key Note Segment		5 ft	52			
47840	97.6 to 100.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**
47841	100.8 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
47858	108.9 to 118.1 feet	Key Note Segment		5 ft	46			
47825	110.2 to 111.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
47842	118.3 to 121.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	15	SF	$40	**$580**
47843	122.3 to 123.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
47844	135.8 to 142.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
47859	149.8 to 163.3 feet	Key Note Segment		5 ft	68			
47826	149.9 to 150.9 feet	**Vertical Change**	-.56"	5 ft	5	REF		
47845	163.4 to 172.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	44	SF	$40	**$1,740**
47846	175.0 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
47847	192.8 to 198.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
47848	198.8 to 201.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
47849	201.3 to 215.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,700**
47860	216.0 to 227.8 feet	Key Note Segment		5 ft	59			
47827	235.0 to 236.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
47850	257.3 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
47863	262.4 to 263.4 feet	**Protruding Object**	50"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091330	S C ST	12TH ST	11TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47851	263.9 to 277.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
47861	277.9 to 292.3 feet	Key Note Segment		5 ft	72			
47828	279.2 to 280.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
47829	286.1 to 287.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47852	295.3 to 302.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
47862	303.3 to 317.3 feet	Key Note Segment		5 ft	70			
47830	304.4 to 305.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47853	317.3 to 318.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
47854	318.5 to 320.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
47855	324.8 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
47831	326.2 to 327.2 feet	**Vertical Change**	1.04"	5 ft	5	REF		
47832	331.3 to 332.3 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **12TH ST** **$76,189.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091442	S C ST	12TH ST	13TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48312	0.0 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
48313	12.5 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48331	20.7 to 34.6 feet	Key Note Segment		5 ft	70			
48314	47.0 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48315	51.9 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
48307	53.9 to 54.9 feet	**Vertical Change**	.8"	5 ft	5	REF		
48316	57.3 to 69.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
48332	69.9 to 79.8 feet	Key Note Segment		5 ft	49			
48317	79.8 to 82.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
48333	103.4 to 116.9 feet	Key Note Segment		5 ft	68			
48318	124.3 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
48319	128.8 to 131.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
48320	131.6 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,460**
48334	145.7 to 154.8 feet	Key Note Segment		5 ft	46			
48321	154.8 to 156.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
48322	156.9 to 174.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
48335	174.0 to 183.4 feet	Key Note Segment		5 ft	47			
48323	183.5 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
48324	192.0 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
48325	212.0 to 216.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
48308	232.6 to 233.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
48326	232.8 to 234.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
48336	238.8 to 252.0 feet	Key Note Segment		5 ft	66			
48309	239.6 to 240.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
48327	252.0 to 295.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	219	SF	$40	**$8,780**
48310	258.0 to 259.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
48328	299.7 to 304.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
48311	306.2 to 307.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091442	S C ST	12TH ST	13TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48329	309.6 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
48330	337.4 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **12TH ST**								**$77,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091326	S C ST	13TH ST	12TH ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47801	1.6 to 23.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,900**
47797	14.1 to 15.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
47802	23.1 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
47803	27.0 to 37.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
47798	33.2 to 34.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
47804	41.4 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
47805	50.8 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
47819	72.1 to 82.4 feet	Key Note Segment		5 ft	52			
47820	84.6 to 94.8 feet	Key Note Segment		5 ft	51			
47806	94.8 to 97.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
47807	97.9 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
47808	110.6 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
47809	123.9 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
47821	134.3 to 149.3 feet	Key Note Segment		5 ft	75			
47810	149.9 to 153.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
47811	158.5 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
47812	175.8 to 181.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
47813	183.3 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
47814	194.9 to 196.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
47822	197.4 to 210.1 feet	Key Note Segment		5 ft	64			
47799	210.6 to 211.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
47823	282.8 to 291.9 feet	Key Note Segment		5 ft	45			
47815	303.6 to 304.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47816	322.6 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
47817	329.1 to 330.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
47818	331.1 to 341.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
47800	341.5 to 342.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **13TH ST** **$88,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091445	S C ST	13TH ST	14TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48352	0.0 to 1.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48337	3.3 to 4.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
48353	6.5 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
48338	15.2 to 16.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
48354	19.5 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
48340	30.1 to 32.8 feet	**Vertical Change**	.27"	5 ft	13	LF	$75	**$1,013**
48341	33.9 to 34.9 feet	**Vertical Change**	.75"	5 ft	5	REF		
48355	34.7 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
48342	40.8 to 41.8 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
48356	42.3 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
48343	43.1 to 44.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
48357	61.1 to 66.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,300**
48358	70.4 to 77.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
48344	76.0 to 77.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
48359	80.9 to 85.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
48378	85.6 to 95.5 feet	Key Note Segment		5 ft	50			
48345	90.1 to 91.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
48360	95.6 to 114.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	96	SF	$40	**$3,840**
48346	110.1 to 111.1 feet	**Vertical Change**	3.47"	5 ft	5	REF		
48361	129.6 to 130.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
48362	130.9 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
48363	146.8 to 149.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
48379	151.1 to 160.4 feet	Key Note Segment		5 ft	47			
48364	160.4 to 168.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	42	SF	$40	**$1,680**
48380	169.6 to 179.2 feet	Key Note Segment		5 ft	48			
48365	179.2 to 181.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
48366	182.8 to 193.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
48367	196.5 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091445	S C ST	13TH ST	14TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48348	211.7 to 212.7 feet	Vertical Change	.51"	5 ft	5	SF	$75	$375
48381	218.4 to 226.8 feet	Key Note Segment		5 ft	42			
48349	218.9 to 219.9 feet	Vertical Change	-.46"	5 ft	5	REF		
48368	227.0 to 228.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
48350	227.5 to 228.5 feet	Vertical Change	.28"	5 ft	5	REF		
48369	228.3 to 235.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
48370	238.3 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	$11,400
48371	257.4 to 265.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	$4,680
48372	266.3 to 272.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
48373	274.6 to 279.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
48374	279.8 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
48382	283.8 to 293.3 feet	Key Note Segment		5 ft	48			
48351	284.3 to 285.3 feet	Vertical Change	.3"	5 ft	5	REF		
48375	297.7 to 298.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
48383	299.4 to 309.3 feet	Key Note Segment		5 ft	50			
48376	309.3 to 325.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	80	SF	$40	$3,220
48377	325.8 to 340.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	$8,580

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **13TH ST** **$103,532.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091322	S C ST	14TH ST	13TH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47764	0.0 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
47765	2.9 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
47766	17.2 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
47767	25.5 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
47768	43.7 to 68.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,640**
47790	70.9 to 90.5 feet	Key Note Segment		5 ft	98			
47757	88.3 to 92.1 feet	**Vertical Change**	.29"	5 ft	19	REF		
47769	91.9 to 94.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	13	SF	$120	**$1,500**
47758	100.2 to 101.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
47770	101.4 to 102.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
47759	102.7 to 103.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
47771	107.8 to 113.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,480**
47772	114.5 to 117.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
47773	117.8 to 119.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
47774	120.4 to 128.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
47775	132.6 to 147.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
47760	138.1 to 139.1 feet	**Vertical Change**	.45"	5 ft	5	REF		
47791	147.8 to 164.8 feet	Key Note Segment		5 ft	85			
47776	164.8 to 171.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**
47761	165.0 to 166.0 feet	**Vertical Change**	.88"	5 ft	5	REF		
47777	172.2 to 183.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
47792	183.7 to 199.0 feet	Key Note Segment		5 ft	77			
47762	199.3 to 200.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47778	205.8 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
47779	222.6 to 223.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47793	224.3 to 238.4 feet	Key Note Segment		5 ft	71			
47780	238.4 to 241.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	14	SF	$40	**$540**
47763	238.8 to 239.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091322	S C ST	14TH ST	13TH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47781	242.0 to 243.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
47782	249.2 to 253.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
47783	253.9 to 258.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
47794	258.1 to 270.8 feet	Key Note Segment		5 ft	63			
47784	270.8 to 272.0 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$240**
47785	272.9 to 277.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
47786	277.8 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
47787	291.8 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
47795	304.7 to 315.2 feet	Key Note Segment		5 ft	53			
47788	316.9 to 330.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
47796	317.8 to 318.8 feet		6.0-7.0%	5 ft	5			
47789	333.3 to 339.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **14TH ST** **$100,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091504	S C ST	14TH ST	1030 S C ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48480	0.0 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
48495	30.8 to 44.2 feet	Key Note Segment		5 ft	67			
48471	31.1 to 32.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
48481	44.2 to 45.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
48482	45.3 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
48496	52.3 to 66.3 feet	Key Note Segment		5 ft	70			
48472	53.3 to 54.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
48483	66.3 to 85.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	96	SF	$40	**$3,840**
48484	90.6 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
48497	117.0 to 131.1 feet	Key Note Segment		5 ft	71			
48473	124.5 to 125.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
48485	131.3 to 137.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,300**
48498	137.8 to 152.1 feet	Key Note Segment		5 ft	71			
48486	154.2 to 199.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,120**
48474	165.9 to 166.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48499	203.1 to 217.2 feet	Key Note Segment		5 ft	71			
48487	217.2 to 224.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,420**
48500	224.3 to 238.3 feet	Key Note Segment		5 ft	70			
48475	232.1 to 233.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
48488	238.3 to 241.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**
48476	239.0 to 240.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
48489	241.5 to 246.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
48490	249.3 to 257.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
48491	257.4 to 265.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
48492	273.0 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
48501	289.2 to 303.4 feet	Key Note Segment		5 ft	71			
48477	296.7 to 297.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
48493	303.4 to 309.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091504	S C ST	14TH ST	1030 S C ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48502	309.9 to 324.3 feet	Key Note Segment		5 ft	72			
48479	338.4 to 339.4 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
48494	341.3 to 349.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **14TH ST** **$99,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091354	S C ST	6TH ST	E YOSEMITE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48044	5.2 to 6.5 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	10	SF	$120	**$1,170**
48045	11.4 to 12.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	11	SF	$120	**$1,260**
48059	14.1 to 30.9 feet	Key Note Segment		8 ft	126			
48046	32.5 to 34.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	12	SF	$120	**$1,440**
48047	37.8 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	66	SF	$120	**$7,920**
48048	51.3 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	145	SF	$120	**$17,370**
48049	72.9 to 76.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	25	SF	$120	**$2,970**
48050	76.2 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	158	SF	$120	**$18,900**
48042	87.9 to 88.9 feet	**Vertical Change**	.27"	8 ft	8	REF		
48051	97.8 to 114.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	124	SF	$120	**$14,850**
48052	114.8 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	**$4,950**
48060	123.9 to 137.1 feet	Key Note Segment		8 ft	99			
48053	137.3 to 147.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	73	SF	$40	**$2,910**
48061	151.9 to 168.5 feet	Key Note Segment		8 ft	125			
48043	152.8 to 153.8 feet	**Vertical Change**	.34"	8 ft	8	REF		
48054	170.3 to 171.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,260**
48055	173.1 to 189.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	122	SF	$120	**$14,670**
48056	192.9 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	161	SF	$120	**$19,260**
48057	216.3 to 268.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	389	SF	$120	**$46,620**
48058	268.3 to 276.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	62	SF	$120	**$7,380**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **6TH ST** **$162,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091403	S C ST	6TH ST	7TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48083	0.1 to 25.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,300**
48084	26.5 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
48082	26.8 to 27.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
48085	35.1 to 51.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
48086	55.8 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
48087	66.4 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
48111	70.9 to 89.3 feet	Key Note Segment		5 ft	92			
48088	106.0 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
48089	121.0 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48090	128.5 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
48091	153.4 to 155.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
48092	155.7 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
48093	183.8 to 190.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
48094	191.4 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
48112	206.8 to 228.2 feet	Key Note Segment		5 ft	107			
48095	259.6 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
48096	263.4 to 281.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
48097	284.0 to 289.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
48098	289.6 to 293.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
48099	293.2 to 319.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,780**
48100	319.8 to 321.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
48101	321.4 to 329.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
48102	330.2 to 332.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
48103	338.7 to 343.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
48104	347.3 to 348.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
48105	351.4 to 354.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
48106	358.3 to 363.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
48107	363.0 to 369.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091403	S C ST	6TH ST	7TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48108	370.5 to 379.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
48109	395.6 to 403.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
48110	416.3 to 419.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **6TH ST** **$154,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091415	S C ST	7TH ST	CLINTON ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48152	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	19	SF	$120	**$2,268**
48153	15.4 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	28	SF	$120	**$3,360**
48154	24.1 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	68	SF	$120	**$8,148**
48179	33.8 to 46.4 feet	Key Note Segment		7 ft	88			
48150	33.9 to 34.9 feet	**Vertical Change**	.26"	7 ft	7	REF		
48155	47.0 to 68.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	149	SF	$120	**$17,892**
48156	70.5 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	93	SF	$120	**$11,172**
48157	88.6 to 91.0 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	17	SF	$120	**$2,016**
48158	92.2 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	46	SF	$120	**$5,460**
48159	100.9 to 102.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	13	SF	$120	**$1,596**
48160	104.3 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	185	SF	$120	**$22,176**
48151	111.4 to 112.4 feet	**Vertical Change**	.32"	7 ft	7	REF		
48161	130.7 to 134.5 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	27	SF	$120	**$3,192**
48162	135.3 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	33	SF	$120	**$3,948**
48163	143.9 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	125	SF	$120	**$14,952**
48164	161.8 to 165.0 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	22	SF	$120	**$2,688**
48165	167.2 to 187.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	144	SF	$120	**$17,304**
48166	187.8 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	12	SF	$120	**$1,428**
48167	192.8 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	99	SF	$120	**$11,928**
48168	210.9 to 236.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	180	SF	$120	**$21,588**
48169	237.7 to 249.2 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	81	SF	$120	**$9,660**
48170	249.4 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	43	SF	$120	**$5,124**
48171	259.8 to 268.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	63	SF	$120	**$7,560**
48180	269.2 to 291.4 feet	Key Note Segment		7 ft	155			
48172	292.2 to 293.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**
48173	297.0 to 305.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	61	SF	$120	**$7,308**
48174	308.5 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	48	SF	$120	**$5,712**
48175	318.5 to 331.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	91	SF	$120	**$10,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091415	S C ST	7TH ST	CLINTON ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48181	331.5 to 341.8 feet	Key Note Segment		7 ft	72			
48176	343.1 to 347.9 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	34	SF	$120	**$4,032**
48177	348.6 to 352.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	24	SF	$120	**$2,856**
48178	361.1 to 369.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	57	SF	$120	**$6,804**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **7TH ST** **$212,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091343	S C ST	9TH ST	CLINTON ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47936	1.6 to 13.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
47932	12.1 to 13.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
47937	13.7 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
47938	33.3 to 37.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
47939	39.2 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
47940	49.6 to 52.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
47941	55.8 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
47942	60.7 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47943	64.7 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47944	69.8 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
47958	82.3 to 92.3 feet	Key Note Segment		5 ft	50			
47945	92.5 to 105.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	67	SF	$40	**$2,680**
47933	104.0 to 105.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
47946	105.9 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
47947	117.8 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
47948	131.2 to 136.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
47934	135.3 to 136.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
47949	137.8 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,960**
47959	174.4 to 184.7 feet	Key Note Segment		5 ft	52			
47950	184.8 to 186.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
47935	188.5 to 189.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
47951	188.8 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47960	190.8 to 197.6 feet	Key Note Segment		5 ft	34			
47952	197.6 to 202.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
47953	204.6 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
47954	222.0 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
47955	254.0 to 257.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
47956	257.9 to 264.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091343	S C ST	9TH ST	CLINTON ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47957	267.2 to 276.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **9TH ST** **$123,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091430	S C ST	9TH ST	10TH ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48233	0.0 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
48234	13.6 to 20.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
48235	21.1 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$10,020**
48236	40.3 to 42.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
48229	42.5 to 43.5 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
48248	44.8 to 53.0 feet	Key Note Segment		5 ft	41			
48237	53.0 to 58.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,060**
48238	59.3 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
48239	76.3 to 116.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	203	SF	$120	**$24,300**
48240	118.9 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
48241	121.1 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
48230	136.4 to 137.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
48249	137.0 to 157.2 feet	Key Note Segment		5 ft	101			
48242	159.8 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,580**
48231	190.4 to 191.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
48250	218.0 to 226.3 feet	Key Note Segment		5 ft	42			
48232	218.2 to 219.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
48243	259.0 to 262.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
48244	265.6 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
48245	278.3 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
48251	305.4 to 317.4 feet	Key Note Segment		5 ft	60			
48246	320.6 to 321.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
48247	324.8 to 340.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **9TH ST** **$109,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091351	S C ST	CLINTON ST	6TH ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47968	17.3 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
47969	54.6 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
47970	64.6 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
48026	69.6 to 79.2 feet	Key Note Segment		5 ft	48			
47971	79.2 to 80.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
47972	80.3 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
47973	85.3 to 91.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
48027	92.3 to 109.3 feet	Key Note Segment		5 ft	85			
47974	109.7 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
47975	116.8 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
47976	124.6 to 128.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
48028	128.6 to 149.4 feet	Key Note Segment		5 ft	104			
47977	149.4 to 156.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,420**
47978	156.5 to 166.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
47979	166.8 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
48029	172.7 to 205.2 feet	Key Note Segment		5 ft	163			
48030	235.1 to 258.9 feet	Key Note Segment		5 ft	119			
47980	258.9 to 265.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,220**
47981	267.9 to 279.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
48031	279.8 to 290.9 feet	Key Note Segment		5 ft	55			
47982	290.9 to 319.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	142	SF	$40	**$5,660**
47983	319.8 to 335.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
47961	334.7 to 337.5 feet	**Vertical Change**	.26"	5 ft	14	REF		
48032	335.8 to 354.6 feet	Key Note Segment		5 ft	94			
47962	354.3 to 355.3 feet	**Vertical Change**	.92"	5 ft	5	REF		
48033	383.8 to 400.9 feet	Key Note Segment		5 ft	86			
47984	401.1 to 408.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	36	SF	$40	**$1,440**
47985	408.3 to 410.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091351	S C ST	CLINTON ST	6TH ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47986	414.0 to 420.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
47987	422.4 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
47988	429.3 to 430.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
47989	432.2 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47990	436.8 to 442.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
47991	449.3 to 454.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
47992	455.3 to 464.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
47993	464.7 to 467.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
47994	470.9 to 486.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
47995	489.0 to 490.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
48034	491.0 to 501.2 feet	Key Note Segment		5 ft	51			
47996	504.8 to 512.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
47997	520.1 to 540.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
48035	542.9 to 551.3 feet	Key Note Segment		5 ft	42			
47998	551.8 to 553.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47963	554.2 to 555.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
47999	571.3 to 579.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
48000	585.9 to 592.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
48001	592.5 to 595.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
48002	600.3 to 604.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
47964	605.7 to 606.7 feet	**Vertical Change**	.9"	5 ft	5	REF		
48003	605.8 to 608.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
48004	611.1 to 614.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
47965	617.1 to 618.1 feet	**Vertical Change**	-3.29"	5 ft	5	SF	$75	**$375**
48036	617.2 to 633.3 feet	Key Note Segment		5 ft	80			
48005	635.7 to 643.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,860**
48006	644.2 to 646.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
48007	650.4 to 653.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091351	S C ST	CLINTON ST	6TH ST	109

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48008	657.5 to 659.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
48009	660.1 to 672.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
48010	674.6 to 679.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
47966	677.4 to 678.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
48011	681.6 to 688.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
48012	688.8 to 714.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	129	SF	$120	**$15,480**
48013	714.8 to 718.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
48014	719.8 to 722.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
48015	725.0 to 726.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
48016	727.2 to 734.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	39	SF	$120	**$4,620**
48017	735.5 to 743.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
48018	745.5 to 748.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
48019	750.8 to 752.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	9	SF	$120	**$1,080**
48020	754.0 to 763.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
48021	763.3 to 773.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
48037	774.6 to 791.3 feet	Key Note Segment		5 ft	84			
47967	775.7 to 776.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
48022	793.0 to 796.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
48023	796.3 to 798.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
48024	799.6 to 824.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	126	SF	$120	**$15,060**
48025	829.1 to 840.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
48038	836.1 to 838.3 feet		5.0-6.0%	5 ft	11			
48039	836.1 to 838.3 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
48040	838.3 to 839.5 feet		6.0-7.0%	5 ft	6			
48041	839.5 to 840.8 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **CLINTON ST** **$222,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091425	S C ST	CLINTON ST	9TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48210	0.0 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
48211	10.4 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
48206	25.4 to 26.4 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
48212	27.8 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
48213	38.5 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
48207	39.7 to 40.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
48214	52.2 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
48224	68.8 to 77.4 feet	Key Note Segment		5 ft	43			
48225	81.8 to 90.1 feet	Key Note Segment		5 ft	42			
48215	90.6 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
48216	102.7 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
48217	110.8 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
48226	113.3 to 119.8 feet	Key Note Segment		5 ft	33			
48218	120.8 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
48219	122.3 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
48208	123.0 to 124.0 feet	**Vertical Change**	-1.05"	5 ft	5	REF		
48227	125.3 to 148.3 feet	Key Note Segment		5 ft	115			
48220	148.4 to 165.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	84	SF	$40	**$3,360**
48228	166.2 to 177.8 feet	Key Note Segment		5 ft	58			
48221	177.8 to 181.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$680**
48222	183.8 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
48223	187.4 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	224	SF	$120	**$26,880**
48209	212.8 to 213.8 feet	**Vertical Change**	.91"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **CLINTON ST** **$59,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091359	S C ST	E YOSEMITE AVE	6TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48063	5.5 to 12.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	49	SF	$120	**$5,850**
48064	15.0 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	115	SF	$120	**$13,770**
48065	31.2 to 78.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	352	SF	$120	**$42,210**
48066	80.2 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	80	SF	$120	**$9,540**
48067	93.1 to 94.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,170**
48068	94.8 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	164	SF	$120	**$19,710**
48080	120.8 to 134.2 feet	Key Note Segment		8 ft	100			
48069	143.4 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	119	SF	$120	**$14,310**
48070	159.3 to 172.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	101	SF	$120	**$12,150**
48071	172.8 to 193.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	152	SF	$120	**$18,270**
48072	205.6 to 209.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,060**
48073	215.1 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,160**
48074	222.4 to 234.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	89	SF	$120	**$10,710**
48075	236.1 to 241.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	37	SF	$120	**$4,410**
48076	243.6 to 249.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,860**
48081	252.8 to 270.8 feet	Key Note Segment		8 ft	135			
48077	271.8 to 273.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,170**
48078	276.1 to 277.3 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	9	SF	$120	**$1,080**
48079	285.3 to 290.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	40	SF	$120	**$4,770**

TOTAL COST FOR: SW *side of* **S C ST** *Starting at:* **E YOSEMITE AVE** **$169,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091509	S C ST	ROOSEVELT AVE	14TH ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48505	0.1 to 19.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
48506	22.0 to 76.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	273	SF	$120	**$32,700**
48507	76.5 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
48508	97.1 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
48529	99.1 to 108.8 feet	Key Note Segment		5 ft	49			
48509	112.4 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
48510	126.4 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
48511	133.3 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
48512	144.9 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
48513	159.0 to 163.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
48514	168.8 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
48515	178.0 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
48516	195.8 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
48517	211.9 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
48518	218.3 to 220.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
48530	220.3 to 229.7 feet	Key Note Segment		5 ft	47			
48519	229.7 to 230.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
48520	234.8 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
48521	238.9 to 239.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
48522	239.9 to 248.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
48503	250.2 to 251.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
48523	252.4 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
48524	272.7 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
48531	289.5 to 298.8 feet	Key Note Segment		5 ft	47			
48525	298.8 to 328.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	148	SF	$40	**$5,920**
48532	328.4 to 337.5 feet	Key Note Segment		5 ft	46			
48526	339.3 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
48527	346.7 to 347.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091509	S C ST	ROOSEVELT AVE	14TH ST	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
48528	349.0 to 354.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
48533	356.8 to 368.4 feet	Key Note Segment		5 ft	58			

TOTAL COST FOR: NE *side of* **S C ST** *Starting at:* **ROOSEVELT AVE** **$140,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090941	S D ST	10TH ST	9TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46835	24.0 to 25.0 feet	Vertical Change	.76"	5 ft	5	SF	$75	$375
46836	35.2 to 36.2 feet	Vertical Change	.61"	5 ft	5	SF	$75	$375
46837	41.8 to 42.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
46838	45.3 to 46.3 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
46853	48.3 to 49.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
46854	49.7 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
46855	57.6 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
46856	66.3 to 67.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
46874	67.6 to 78.3 feet	Key Note Segment		5 ft	54			
46839	67.9 to 68.9 feet	Vertical Change	1.2"	5 ft	5	REF		
46840	78.9 to 79.9 feet	Vertical Change	2.06"	5 ft	5	REF		
46857	79.0 to 87.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	$5,280
46875	88.6 to 95.8 feet	Key Note Segment		5 ft	36			
46841	90.2 to 91.2 feet	Vertical Change	3.21"	5 ft	5	REF		
46843	106.0 to 107.0 feet	Vertical Change	1.34"	5 ft	5	SF	$75	$375
46844	128.0 to 129.0 feet	Vertical Change	-.42"	5 ft	5	LF	$75	$375
46845	145.4 to 146.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
46846	151.0 to 152.0 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
46876	157.3 to 165.0 feet	Key Note Segment		5 ft	38			
46847	157.5 to 158.5 feet	Vertical Change	-.52"	5 ft	5	REF		
46848	164.4 to 165.4 feet	Vertical Change	.27"	5 ft	5	REF		
46858	168.4 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
46849	172.2 to 173.2 feet	Vertical Change	-.35"	5 ft	5	REF		
46850	183.6 to 184.6 feet	Vertical Change	-.3"	5 ft	5	REF		
46859	186.0 to 194.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,100
46851	192.5 to 193.5 feet	Vertical Change	.33"	5 ft	5	REF		
46860	195.3 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
46861	200.5 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090941	S D ST	10TH ST	9TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46852	201.2 to 202.2 feet	Vertical Change	.37"	5 ft	5	REF		
46862	215.3 to 222.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
46863	225.8 to 245.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
46864	249.3 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
46865	256.3 to 262.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
46866	266.8 to 268.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46877	268.6 to 278.3 feet	Key Note Segment		5 ft	48			
46867	278.3 to 279.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
46868	283.3 to 285.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
46869	289.7 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
46870	295.1 to 314.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
46871	315.8 to 316.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
46872	319.2 to 334.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
46873	335.8 to 344.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **10TH ST** **$93,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091144	S D ST	10TH ST	11TH ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47632	1.5 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
47650	30.7 to 39.7 feet	Key Note Segment		5 ft	45			
47633	40.2 to 41.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
47651	41.4 to 57.4 feet	Key Note Segment		5 ft	80			
47634	57.4 to 58.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$240**
47635	62.0 to 69.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
47636	71.3 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
47637	82.4 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$14,940**
47638	107.8 to 111.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
47652	111.2 to 122.3 feet	Key Note Segment		5 ft	56			
47639	122.3 to 124.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
47640	128.8 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
47653	150.4 to 164.6 feet	Key Note Segment		5 ft	71			
47641	164.6 to 175.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,160**
47654	175.5 to 190.3 feet	Key Note Segment		5 ft	74			
47642	191.7 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
47643	204.3 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
47655	214.3 to 224.3 feet	Key Note Segment		5 ft	50			
47644	224.3 to 231.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	36	SF	$40	**$1,420**
47645	231.6 to 242.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
47628	235.2 to 236.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
47646	245.8 to 256.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
47647	256.6 to 258.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
47648	261.8 to 263.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47649	272.1 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
47629	273.3 to 274.3 feet	**Vertical Change**	.51"	5 ft	5	REF		
47656	281.0 to 291.3 feet	Key Note Segment		5 ft	52			
47630	281.9 to 282.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091144	S D ST	10TH ST	11TH ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47631	290.4 to 291.4 feet	Vertical Change	.32"	5 ft	5	REF		
47657	323.1 to 332.8 feet	Key Note Segment		5 ft	48			

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **10TH ST** **$79,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090937	S D ST	11TH ST	10TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46810	1.1 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,180**
46811	6.8 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
46812	20.5 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
46813	35.3 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
46814	45.1 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
46815	53.4 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
46831	69.9 to 79.8 feet	Key Note Segment		5 ft	49			
46816	79.8 to 84.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	23	SF	$40	**$900**
46832	84.8 to 94.8 feet	Key Note Segment		5 ft	50			
46817	95.1 to 101.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,340**
46818	101.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
46819	110.4 to 121.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
46820	121.9 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
46833	131.3 to 140.5 feet	Key Note Segment		5 ft	46			
46821	140.8 to 162.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$13,020**
46822	162.7 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
46823	170.3 to 177.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
46824	181.9 to 189.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
46825	189.0 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
46807	189.6 to 190.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
46834	201.9 to 211.7 feet	Key Note Segment		5 ft	49			
46826	212.5 to 230.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	92	SF	$40	**$3,660**
46827	232.9 to 239.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
46828	241.6 to 289.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	240	SF	$120	**$28,800**
46829	289.9 to 314.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
46808	292.0 to 293.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
46809	308.0 to 309.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
46830	319.9 to 341.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090937	S D ST	11TH ST	10TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **11TH ST**								**$144,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091148	S D ST	11TH ST	12TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47661	1.2 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
47662	12.6 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
47663	20.0 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	162	SF	$120	**$19,380**
47681	54.7 to 69.0 feet	Key Note Segment		5 ft	72			
47664	69.8 to 70.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
47665	70.9 to 75.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
47666	79.9 to 87.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
47667	90.7 to 95.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
47668	95.3 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
47658	97.2 to 98.2 feet	**Vertical Change**	1.36"	5 ft	5	REF		
47669	100.1 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
47670	105.0 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
47682	108.8 to 119.1 feet	Key Note Segment		5 ft	52			
47671	119.1 to 123.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
47672	124.6 to 130.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
47683	130.3 to 140.4 feet	Key Note Segment		5 ft	50			
47673	146.6 to 148.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47674	150.7 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
47675	157.6 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
47676	162.1 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**
47684	194.9 to 212.1 feet	Key Note Segment		5 ft	86			
47677	212.1 to 237.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	129	SF	$40	**$5,140**
47659	212.4 to 213.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
47685	237.8 to 246.9 feet	Key Note Segment		5 ft	46			
47678	246.9 to 269.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	111	SF	$40	**$4,420**
47686	269.0 to 286.1 feet	Key Note Segment		5 ft	86			
47660	269.6 to 270.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
47679	286.3 to 292.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091148	S D ST	11TH ST	12TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47680	292.0 to 342.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	251	SF	$120	**$30,120**

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **11TH ST** **$117,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090933	S D ST	12TH ST	11TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46775	0.9 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
46767	5.2 to 6.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
46776	19.1 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
46777	24.3 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
46778	26.7 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
46779	36.3 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
46800	41.3 to 50.5 feet	Key Note Segment		5 ft	46			
46780	50.5 to 58.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
46781	59.3 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
46782	63.3 to 65.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
46783	65.7 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46784	77.6 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
46768	83.3 to 84.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
46785	98.6 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
46769	114.6 to 115.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
46801	115.5 to 124.4 feet	Key Note Segment		5 ft	45			
46786	126.5 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
46787	146.6 to 147.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
46788	152.0 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
46802	154.6 to 163.4 feet	Key Note Segment		5 ft	44			
46789	167.2 to 171.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
46790	172.1 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
46803	180.9 to 192.3 feet	Key Note Segment		5 ft	57			
46791	192.3 to 214.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	111	SF	$40	**$4,440**
46770	204.0 to 205.0 feet	**Vertical Change**	.65"	5 ft	5	REF		
46804	214.8 to 224.8 feet	Key Note Segment		5 ft	50			
46792	226.3 to 230.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
46793	230.4 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090933	S D ST	12TH ST	11TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46794	238.6 to 254.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
46795	259.3 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
46805	261.8 to 277.9 feet	Key Note Segment		5 ft	80			
46771	262.7 to 263.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
46796	278.6 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
46797	285.7 to 286.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46772	286.7 to 287.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
46806	305.0 to 321.0 feet	Key Note Segment		5 ft	80			
46798	321.0 to 322.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
46799	322.7 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
46773	329.5 to 330.5 feet	**Vertical Change**	1.48"	5 ft	5	SF	$75	**$375**
46774	339.5 to 340.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **12TH ST** **$73,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091158	S D ST	12TH ST	13TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47721	1.3 to 12.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
47705	10.9 to 11.9 feet	Vertical Change	-.39"	5 ft	5	REF		
47722	14.6 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
47723	19.8 to 20.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
47724	20.9 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
47706	26.2 to 27.2 feet	Vertical Change	.26"	5 ft	5	REF		
47707	36.9 to 37.9 feet	Vertical Change	.6"	5 ft	5	SF	$75	**$375**
47725	39.2 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
47708	40.8 to 41.8 feet	Vertical Change	.43"	5 ft	5	REF		
47709	45.9 to 46.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
47726	51.5 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
47710	52.3 to 55.5 feet	Vertical Change	3.48"	5 ft	16	REF		
47711	57.9 to 58.9 feet	Vertical Change	1.32"	5 ft	5	SF	$75	**$375**
47712	61.1 to 62.1 feet	Vertical Change	.75"	5 ft	5	SF	$75	**$375**
47727	63.8 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
47739	91.1 to 100.7 feet	Key Note Segment		5 ft	48			
47713	99.0 to 100.0 feet	Vertical Change	.27"	5 ft	5	REF		
47714	116.4 to 117.4 feet	Vertical Change	-.55"	5 ft	5	SF	$75	**$375**
47740	127.3 to 137.8 feet	Key Note Segment		5 ft	53			
47715	127.6 to 128.6 feet	Vertical Change	.64"	5 ft	5	REF		
47728	138.0 to 169.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	159	SF	$40	**$6,360**
47741	170.5 to 180.5 feet	Key Note Segment		5 ft	50			
47716	170.8 to 171.8 feet	Vertical Change	-.28"	5 ft	5	REF		
47717	173.6 to 174.6 feet	Vertical Change	-1"	5 ft	5	REF		
47729	180.5 to 186.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	30	SF	$40	**$1,180**
47718	186.1 to 187.1 feet	Vertical Change	-.28"	5 ft	5	REF		
47730	186.4 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47719	188.3 to 189.3 feet	Vertical Change	3.05"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091158	S D ST	12TH ST	13TH ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47731	189.9 to 191.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47732	194.7 to 203.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
47733	206.9 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
47734	211.5 to 218.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
47742	219.3 to 233.6 feet	Key Note Segment		5 ft	72			
47720	226.8 to 227.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
47735	233.6 to 235.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
47736	237.7 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47737	243.1 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
47743	257.2 to 267.8 feet	Key Note Segment		5 ft	53			
47744	324.0 to 332.7 feet	Key Note Segment		5 ft	44			
47738	333.0 to 339.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,320**

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **12TH ST** **$66,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090930	S D ST	13TH ST	12TH ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46741	0.1 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
46742	12.8 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,300**
46743	36.4 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
46762	45.3 to 53.5 feet	Key Note Segment		5 ft	41			
46744	92.0 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46763	96.3 to 106.4 feet	Key Note Segment		5 ft	51			
46739	109.1 to 110.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
46745	110.6 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
46746	152.3 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
46764	156.5 to 165.3 feet	Key Note Segment		5 ft	44			
46747	165.3 to 167.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
46748	167.7 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
46749	181.7 to 183.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
46750	191.4 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
46751	201.5 to 206.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
46765	212.0 to 220.9 feet	Key Note Segment		5 ft	45			
46752	220.9 to 222.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
46753	232.5 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
46754	238.0 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
46740	261.5 to 262.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
46766	278.7 to 288.1 feet	Key Note Segment		5 ft	47			
46755	288.1 to 292.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$840**
46756	294.2 to 298.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
46757	301.3 to 302.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
46758	302.9 to 310.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
46759	310.9 to 312.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
46760	314.3 to 319.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
46761	321.4 to 339.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090930	S D ST	13TH ST	12TH ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **13TH ST**								**$73,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091200	S D ST	13TH ST	904 S D ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47751	0.0 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
47752	14.6 to 18.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,580**
47753	20.2 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
47754	26.5 to 37.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,540**
47755	38.8 to 39.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
47756	41.6 to 72.5 feet	Key Note Segment		5 ft	155			
47745	46.6 to 47.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
47746	52.3 to 53.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
47747	54.0 to 55.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
47748	55.9 to 56.9 feet	**Vertical Change**	3.21"	5 ft	5	REF		
47749	62.3 to 63.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
47750	69.5 to 70.5 feet	**Vertical Change**	1.19"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **13TH ST** **$21,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090926	S D ST	14TH ST	13TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46710	1.6 to 2.6 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
46711	5.3 to 6.3 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
46717	17.8 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,360
46736	39.8 to 50.6 feet	Key Note Segment		5 ft	54			
46718	62.7 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
46719	82.9 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
46720	88.2 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
46721	96.7 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
46722	101.0 to 106.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
46723	106.4 to 149.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	213	SF	$120	$25,560
46712	136.4 to 137.4 feet	Vertical Change	.33"	5 ft	5	REF		
46724	154.1 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
46737	156.8 to 167.2 feet	Key Note Segment		5 ft	52			
46725	182.6 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
46726	191.3 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
46727	199.8 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
46713	200.6 to 201.6 feet	Vertical Change	.29"	5 ft	5	REF		
46728	214.6 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,120
46714	234.8 to 235.8 feet	Vertical Change	1.27"	5 ft	5	SF	$75	$375
46715	241.1 to 242.1 feet	Vertical Change	-.64"	5 ft	5	SF	$75	$375
46729	244.4 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
46738	281.3 to 290.6 feet	Key Note Segment		5 ft	47			
46716	281.6 to 282.6 feet	Vertical Change	-.46"	5 ft	5	REF		
46730	290.6 to 298.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	39	SF	$40	$1,560
46731	298.4 to 307.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	$5,640
46732	310.0 to 329.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	$11,880
46733	332.3 to 333.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
46734	335.5 to 336.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$600

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090926	S D ST	14TH ST	13TH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46735	336.8 to 340.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **14TH ST** **$107,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091058	S D ST	6TH ST	E YOSEMITE AVE	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47391	0.3 to 1.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**
47392	2.2 to 3.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$660**
47393	8.1 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
47394	10.5 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
47395	21.3 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
47396	32.6 to 36.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
47397	36.8 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
47398	45.8 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	171	SF	$120	**$20,460**
47399	82.1 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
47400	83.3 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47401	87.2 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
47402	96.3 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47424	98.8 to 126.3 feet	Key Note Segment		5 ft	138			
47403	127.9 to 129.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
47404	129.4 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
47405	134.7 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
47425	145.2 to 160.3 feet	Key Note Segment		5 ft	76			
47389	152.9 to 153.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
47390	159.3 to 160.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
47406	162.3 to 167.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,940**
47407	167.6 to 178.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,660**
47408	179.7 to 181.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
47409	182.6 to 188.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
47410	190.4 to 201.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
47411	204.3 to 208.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
47412	209.8 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
47413	221.7 to 224.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
47414	233.5 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091058	S D ST	6TH ST	E YOSEMITE AVE	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47415	242.0 to 247.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
47416	254.0 to 256.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
47417	258.1 to 259.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
47418	259.3 to 260.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
47419	261.9 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
47420	263.3 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
47421	269.9 to 276.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
47422	280.5 to 282.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
47423	283.8 to 287.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **6TH ST** **$99,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091117	S D ST	6TH ST	7TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47510	0.0 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
47545	9.2 to 40.9 feet	Key Note Segment		5 ft	159			
47511	40.9 to 67.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	131	SF	$40	**$5,220**
47504	64.3 to 65.3 feet	Vertical Change	3.26"	5 ft	5	REF		
47512	69.7 to 94.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
47513	94.7 to 100.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
47514	106.2 to 110.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
47515	110.3 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47516	115.1 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
47517	127.7 to 132.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
47518	133.2 to 150.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
47519	153.1 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
47520	161.8 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
47521	166.3 to 168.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
47522	171.2 to 173.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
47523	179.8 to 181.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
47524	182.0 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
47525	186.2 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
47546	198.8 to 223.3 feet	Key Note Segment		5 ft	123			
47526	223.5 to 226.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
47527	250.3 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
47547	257.8 to 281.0 feet	Key Note Segment		5 ft	116			
47528	282.5 to 299.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
47529	302.8 to 312.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
47506	305.4 to 306.4 feet	Vertical Change	.59"	5 ft	5	REF		
47548	315.8 to 332.8 feet	Key Note Segment		5 ft	85			
47530	340.6 to 347.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
47507	345.1 to 348.2 feet	Vertical Change	.29"	5 ft	16	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091117	S D ST	6TH ST	7TH ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47531	348.0 to 354.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
47532	355.0 to 372.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
47533	374.7 to 377.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
47508	379.0 to 380.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
47534	379.8 to 382.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
47535	383.1 to 394.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
47536	398.1 to 401.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
47537	405.2 to 421.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
47509	409.1 to 410.1 feet	**Vertical Change**	.51"	5 ft	5	REF		
47538	424.4 to 426.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
47539	426.5 to 431.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
47540	448.7 to 459.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
47541	462.2 to 469.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
47542	477.7 to 478.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47549	482.3 to 500.7 feet	Key Note Segment		5 ft	92			
47543	503.1 to 506.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
47544	507.8 to 509.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **6TH ST** **$149,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090954	S D ST	7TH ST	6TH ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46932	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
46933	5.8 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
46928	10.0 to 11.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
46929	23.6 to 24.6 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
46934	25.3 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
46935	36.0 to 37.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
46936	39.7 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
46937	52.5 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
46938	75.5 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
46939	82.4 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
46940	86.3 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
46930	99.9 to 100.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
46931	129.7 to 130.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
46941	203.8 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
46942	212.1 to 213.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
46943	214.6 to 216.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
46944	216.3 to 219.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
46945	219.1 to 223.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
46946	224.2 to 225.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
46947	229.4 to 233.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
46948	233.9 to 242.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
46949	244.6 to 257.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,440**
46950	259.3 to 269.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
46951	272.0 to 279.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
46963	280.5 to 293.8 feet	Key Note Segment		5 ft	67			
46952	294.4 to 301.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	37	SF	$40	**$1,480**
46953	303.8 to 308.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
46954	308.9 to 326.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090954	S D ST	7TH ST	6TH ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46955	326.0 to 327.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
46956	329.5 to 332.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
46957	333.0 to 342.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
46958	345.6 to 347.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
46959	350.3 to 351.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
46960	351.4 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	250	SF	$120	**$29,940**
46961	403.6 to 409.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
46962	411.3 to 418.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **7TH ST** **$117,625.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091120	S D ST	7TH ST	316 S D ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47553	0.1 to 8.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
47554	9.5 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
47555	43.2 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47556	50.3 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
47550	61.5 to 62.5 feet	**Vertical Change**	2.87"	5 ft	5	REF		
47551	65.4 to 66.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
47557	69.5 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
47563	74.6 to 94.0 feet	Key Note Segment		5 ft	97			
47552	76.0 to 77.0 feet	**Vertical Change**	.66"	5 ft	5	REF		
47558	95.7 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
47559	110.0 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47564	111.3 to 136.6 feet	Key Note Segment		5 ft	127			
47560	136.6 to 169.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	165	SF	$40	**$6,580**
47561	170.8 to 196.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,300**
47562	201.6 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **7TH ST** **$44,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090944	S D ST	9TH ST	CLINTON ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46884	1.8 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
46885	13.4 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
46878	13.7 to 14.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
46879	22.1 to 23.1 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
46886	23.8 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
46887	34.4 to 38.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
46888	38.5 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
46880	45.0 to 46.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
46889	50.2 to 62.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
46890	69.2 to 78.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
46894	78.5 to 87.3 feet	Key Note Segment		5 ft	44			
46891	87.3 to 97.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$1,980**
46895	125.2 to 135.8 feet	Key Note Segment		5 ft	53			
46881	125.5 to 126.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
46892	144.3 to 181.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,140**
46882	150.6 to 151.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
46896	194.3 to 212.3 feet	Key Note Segment		5 ft	90			
46893	212.3 to 216.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$920**
46883	212.9 to 213.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
46897	222.1 to 223.2 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **9TH ST** **$55,775.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091140	S D ST	9TH ST	10TH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47603	2.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
47604	22.3 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
47605	32.0 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
47606	34.2 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
47607	40.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
47608	66.2 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
47609	71.2 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
47610	86.2 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
47611	94.8 to 102.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
47624	113.0 to 123.3 feet	Key Note Segment		5 ft	52			
47612	125.5 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
47613	154.9 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
47614	161.3 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
47625	167.3 to 175.8 feet	Key Note Segment		5 ft	43			
47615	175.9 to 181.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	27	SF	$40	**$1,080**
47616	182.6 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
47617	193.5 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
47618	199.1 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
47619	204.6 to 218.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
47598	221.6 to 222.6 feet	**Vertical Change**	1.67"	5 ft	5	SF	$75	**$375**
47620	225.6 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
47626	226.7 to 233.3 feet	Key Note Segment		5 ft	33			
47621	239.8 to 240.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
47599	242.0 to 243.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
47622	242.3 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
47600	266.2 to 267.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
47601	269.9 to 270.9 feet	**Vertical Change**	.62"	5 ft	5	REF		
47623	270.4 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091140	S D ST	9TH ST	10TH ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47602	274.6 to 275.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
47627	299.5 to 307.4 feet	Key Note Segment		5 ft	39			

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **9TH ST** **$58,365.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090949	S D ST	CLINTON ST	7TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46923	3.5 to 17.1 feet	Key Note Segment		5 ft	68			
46898	3.7 to 4.7 feet	Vertical Change	.4"	5 ft	5	REF		
46899	39.8 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
46900	66.4 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
46901	79.3 to 82.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
46902	82.6 to 92.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
46903	95.4 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
46924	100.6 to 113.3 feet	Key Note Segment		5 ft	64			
46904	127.0 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
46905	130.8 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
46906	138.3 to 144.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
46907	146.2 to 161.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	79	SF	$120	**$9,420**
46908	163.3 to 167.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,700**
46909	171.5 to 177.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
46910	181.8 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46911	183.5 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46912	192.8 to 200.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
46913	221.7 to 225.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
46925	225.9 to 243.3 feet	Key Note Segment		5 ft	87			
46914	243.3 to 246.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	**$600**
46915	248.4 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
46926	281.3 to 298.3 feet	Key Note Segment		5 ft	85			
46916	298.3 to 312.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	71	SF	$40	**$2,840**
46917	315.2 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
46918	341.8 to 366.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
46927	366.7 to 382.8 feet	Key Note Segment		5 ft	81			
46919	382.8 to 385.8 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	15	SF	$40	**$600**
46920	386.1 to 391.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090949	S D ST	CLINTON ST	7TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46921	391.8 to 392.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46922	396.3 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **CLINTON ST** **$95,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091133	S D ST	CLINTON ST	9TH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47569	0.0 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
47570	18.9 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
47565	22.3 to 23.3 feet	**Vertical Change**	.84"	5 ft	5	REF		
47566	35.0 to 36.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
47580	43.0 to 61.3 feet	Key Note Segment		5 ft	92			
47567	51.8 to 52.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
47571	61.3 to 63.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$520**
47572	63.9 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
47573	100.4 to 120.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
47574	125.8 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
47575	139.7 to 141.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
47581	143.3 to 168.6 feet	Key Note Segment		5 ft	126			
47568	168.2 to 169.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
47576	168.6 to 176.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,500**
47577	176.1 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
47578	209.9 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
47579	215.9 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **CLINTON ST** **$59,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091102	S D ST	E YOSEMITE AVE	6TH ST	112

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47430	8.4 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,160**
47426	14.6 to 15.6 feet	**Vertical Change**	.52"	8 ft	8	REF		
47431	14.9 to 18.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	**$3,150**
47432	23.4 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	221	SF	$120	**$26,460**
47427	25.7 to 26.7 feet	**Vertical Change**	.26"	8 ft	8	LF	$75	**$563**
47428	38.7 to 39.7 feet	**Vertical Change**	.35"	8 ft	8	REF		
47433	55.6 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	110	SF	$120	**$13,230**
47429	59.2 to 60.2 feet	**Vertical Change**	.32"	8 ft	8	REF		
47434	74.0 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	32	SF	$120	**$3,870**
47435	78.3 to 86.1 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	59	SF	$120	**$7,020**
47436	87.6 to 96.9 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	70	SF	$120	**$8,370**
47437	100.7 to 103.8 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	23	SF	$120	**$2,790**
47438	106.2 to 108.5 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	17	SF	$120	**$2,070**
47439	109.9 to 119.2 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	70	SF	$120	**$8,370**
47440	119.2 to 127.0 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	59	SF	$120	**$7,020**
47458	128.2 to 142.9 feet	Key Note Segment		8 ft	110			
47441	144.9 to 154.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	71	SF	$120	**$8,550**
47442	155.3 to 159.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	31	SF	$120	**$3,690**
47443	160.0 to 161.0 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	8	SF	$120	**$900**
47444	161.0 to 163.7 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	20	SF	$120	**$2,430**
47459	164.0 to 190.2 feet	Key Note Segment		8 ft	197			
47445	192.3 to 197.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,950**
47446	197.8 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,600**
47447	204.5 to 215.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	85	SF	$120	**$10,170**
47448	220.6 to 238.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	137	SF	$120	**$16,380**
47449	242.4 to 250.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	63	SF	$120	**$7,560**
47450	257.4 to 264.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	51	SF	$120	**$6,120**
47451	268.2 to 278.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	76	SF	$120	**$9,180**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091102	S D ST	E YOSEMITE AVE	6TH ST	112

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47452	279.8 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,350**
47453	284.1 to 289.1 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	38	SF	$120	**$4,500**
47454	289.1 to 290.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$900**
47455	290.1 to 293.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,610**
47456	294.0 to 297.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	25	SF	$120	**$3,060**
47457	297.8 to 299.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,260**
47460	300.1 to 301.3 feet		5.0-6.0%	8 ft	9			

TOTAL COST FOR: SW *side of* **S D ST** *Starting at:* **E YOSEMITE AVE** **$172,282.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090922	S D ST	OLIVE AVE	14TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46674	5.9 to 6.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
46680	10.8 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
46681	15.3 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
46682	25.9 to 35.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	$5,580
46702	35.2 to 50.3 feet	Key Note Segment		5 ft	75			
46675	42.9 to 43.9 feet	Vertical Change	-.26"	5 ft	5	REF		
46683	50.3 to 56.2 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	30	SF	$40	$1,180
46684	56.5 to 62.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	$3,780
46685	63.5 to 65.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,260
46686	66.8 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
46703	78.3 to 96.7 feet	Key Note Segment		5 ft	92			
46676	94.6 to 95.6 feet	Vertical Change	-.37"	5 ft	5	REF		
46687	101.2 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
46688	106.7 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	$8,460
46704	122.2 to 137.9 feet	Key Note Segment		5 ft	79			
46689	137.9 to 140.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	$520
46690	140.5 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
46677	148.3 to 149.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
46705	148.3 to 162.1 feet	Key Note Segment		5 ft	69			
46691	162.1 to 166.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	20	SF	$40	$800
46692	166.9 to 175.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
46693	180.7 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
46694	186.8 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
46706	190.3 to 206.2 feet	Key Note Segment		5 ft	80			
46695	206.3 to 223.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	88	SF	$40	$3,500
46696	226.0 to 227.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
46697	229.4 to 230.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
46698	233.8 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106090922	S D ST	OLIVE AVE	14TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46707	236.9 to 252.8 feet	Key Note Segment		5 ft	80			
46699	256.7 to 259.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
46678	264.6 to 265.6 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
46700	267.6 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
46708	281.3 to 283.6 feet		5.0-6.0%	5 ft	12			
46709	281.3 to 283.6 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
46679	281.9 to 282.9 feet	**Vertical Change**	-.66"	5 ft	5	SF	$75	**$375**
46701	283.6 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: NE *side of* **S D ST** *Starting at:* **OLIVE AVE** **$63,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111313	S DOUBLE TREE WAY	CHIANTI AVE	W ALMOND AVE	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91835	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
91836	3.8 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
91830	9.9 to 10.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
91837	16.6 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
91838	28.8 to 43.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
91839	43.8 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
91831	44.4 to 47.1 feet	**Vertical Change**	.26"	5 ft	14	REF		
91832	81.5 to 82.5 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
91840	88.3 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
91841	93.0 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
91842	108.9 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
91843	113.1 to 115.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
91833	114.6 to 115.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
91844	115.7 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91845	129.0 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
91834	132.1 to 133.1 feet	**Vertical Change**	.66"	5 ft	5	REF		
91846	141.5 to 149.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
91847	149.6 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
91848	164.1 to 166.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
91849	170.7 to 172.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: W *side of* **S DOUBLE TREE WAY** *Starting at:* **CHIANTI AVE** **$71,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111340	S DOUBLE TREE WAY	DESERT RANCH WAY	MAPLE ST	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92139	0.0 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
92140	6.8 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	239	SF	$120	**$28,620**
92137	50.7 to 51.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
92141	57.1 to 72.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
92142	73.7 to 76.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
92143	77.8 to 79.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
92144	79.4 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
92145	83.0 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
92146	92.5 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
92147	96.4 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
92148	125.2 to 135.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
92149	138.1 to 145.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
92150	146.4 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
92151	146.4 to 149.6 feet		5.0-6.0%	5 ft	16			
92152	146.4 to 149.6 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
92138	149.5 to 150.5 feet	**Vertical Change**	.39"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **S DOUBLE TREE WAY** *Starting at:* **DESERT RANCH WAY** **$79,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111338	S DOUBLE TREE WAY	GAMAY AVE	DESERT RANCH WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92130	0.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
92121	9.9 to 10.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
92131	18.9 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
92122	26.9 to 27.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
92132	30.1 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
92123	35.6 to 36.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92124	44.0 to 45.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92125	47.3 to 48.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
92133	47.3 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
92126	52.5 to 53.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
92127	61.2 to 62.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
92134	67.8 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
92135	101.8 to 138.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	184	SF	$120	**$22,080**
92128	115.5 to 116.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
92136	141.1 to 145.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
92129	145.3 to 146.3 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **S DOUBLE TREE WAY** *Starting at:* **GAMAY AVE** **$61,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111342	S DOUBLE TREE WAY	MAPLE ST	PLUMAS ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92153	0.8 to 1.8 feet	Vertical Change	-.32"	5 ft	5	REF		
92155	1.3 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
92156	26.0 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
92157	50.0 to 69.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
92158	70.7 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
92159	95.0 to 139.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,520**
92160	139.2 to 145.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
92154	145.8 to 146.8 feet	Vertical Change	.45"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **S DOUBLE TREE WAY** *Starting at:* **MAPLE ST** **$81,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111356	S DOUBLE TREE WAY	PLUMAS ST	GAMAY AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92248	0.8 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
92249	16.8 to 22.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
92279	22.7 to 42.8 feet	Key Note Segment		5 ft	101			
92234	23.5 to 24.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
92250	44.6 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
92280	51.3 to 71.6 feet	Key Note Segment		5 ft	101			
92251	73.4 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
92252	82.5 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
92253	96.2 to 108.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
92254	109.3 to 117.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
92255	121.0 to 123.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
92256	123.3 to 131.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
92235	123.7 to 124.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
92281	132.4 to 156.3 feet	Key Note Segment		5 ft	120			
92236	133.3 to 134.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
92257	156.7 to 158.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
92282	164.7 to 185.2 feet	Key Note Segment		5 ft	103			
92258	185.4 to 189.6 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	21	SF	$40	**$840**
92259	192.4 to 200.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
92288	193.6 to 194.6 feet		5.0-6.0%	5 ft	5			
92260	203.8 to 250.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	233	SF	$120	**$27,900**
92237	208.7 to 209.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
92283	250.3 to 270.0 feet	Key Note Segment		5 ft	99			
92238	250.8 to 251.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
92261	272.0 to 277.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
92284	277.3 to 298.5 feet	Key Note Segment		5 ft	106			
92262	298.9 to 306.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
92263	308.8 to 336.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111356	S DOUBLE TREE WAY	PLUMAS ST	GAMAY AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92239	337.2 to 338.2 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
92264	339.6 to 340.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
92265	340.8 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
92266	347.3 to 351.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,580
92240	351.0 to 352.0 feet	Vertical Change	.34"	5 ft	5	REF		
92267	354.2 to 364.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	$6,000
92285	364.5 to 384.1 feet	Key Note Segment		5 ft	98			
92268	386.7 to 392.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
92286	392.3 to 411.8 feet	Key Note Segment		5 ft	98			
92269	413.4 to 414.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
92270	414.5 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,280
92271	434.1 to 442.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$4,980
92272	445.6 to 447.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
92287	448.9 to 469.3 feet	Key Note Segment		5 ft	102			
92241	468.9 to 469.9 feet	Vertical Change	.36"	5 ft	5	REF		
92273	470.9 to 499.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	$16,860
92242	500.6 to 501.6 feet	Vertical Change	.38"	5 ft	5	REF		
92274	501.5 to 507.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
92243	507.7 to 508.7 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
92275	511.0 to 516.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
92244	522.7 to 523.7 feet	Vertical Change	.29"	5 ft	5	REF		
92276	523.2 to 528.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
92277	530.7 to 553.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	$13,380
92245	555.8 to 556.8 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
92246	573.4 to 574.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
92278	577.6 to 580.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
92289	578.3 to 581.1 feet		5.0-6.0%	5 ft	14			
92290	578.3 to 581.1 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	$1,680

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111356	S DOUBLE TREE WAY	PLUMAS ST	GAMAY AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92247	581.0 to 582.0 feet	Vertical Change	.51"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W *side of* **S DOUBLE TREE WAY** *Starting at:* **PLUMAS ST** **$185,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111315	S DOUBLE TREE WAY	W ALMOND AVE	CHIANTI AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91856	0.2 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
91857	10.8 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
91858	20.0 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
91859	30.8 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
91860	42.4 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
91850	53.2 to 54.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
91861	60.9 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
91862	76.9 to 78.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
91863	79.0 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
91864	88.8 to 95.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
91865	98.8 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
91851	105.0 to 106.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
91866	112.8 to 116.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
91852	113.9 to 114.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
91867	118.5 to 134.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
91853	122.0 to 123.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
91868	134.9 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
91869	140.4 to 143.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
91870	148.5 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
91854	161.0 to 162.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
91871	162.1 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91855	167.0 to 168.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
91872	168.2 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
91873	169.8 to 171.2 feet		5.0-6.0%	5 ft	7			
91874	172.0 to 173.4 feet		6.0-7.0%	5 ft	7			

TOTAL COST FOR: E *side of* **S DOUBLE TREE WAY** *Starting at:* **W ALMOND AVE** **$61,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081536	S E ST	100 7TH ST	7TH ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46371	2.8 to 3.8 feet	Vertical Change	.28"	8 ft	8	LF	$75	$619
46372	4.8 to 5.8 feet	Vertical Change	1.16"	8 ft	8	SF	$75	$619
46374	6.8 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	$2,772
46375	12.7 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	43	SF	$120	$5,148
46376	18.4 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	67	SF	$120	$8,019
46386	26.5 to 56.2 feet	Key Note Segment		8 ft	245			
46387	57.2 to 71.8 feet	Key Note Segment		8 ft	120			
46377	72.7 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	46	SF	$120	$5,544
46378	78.3 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	238	SF	$120	$28,611
46379	107.2 to 117.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	83	SF	$120	$9,900
46380	117.4 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	135	SF	$120	$16,236
46388	135.3 to 151.2 feet	Key Note Segment		8 ft	131			
46381	151.2 to 154.1 feet	Cross Slope (Driveway)	4.0-5.0%	8 ft	24	SF	$40	$957
46382	154.1 to 166.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	101	SF	$120	$12,177
46383	166.4 to 178.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	100	SF	$120	$11,979
46384	178.9 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	120	SF	$120	$14,454
46385	193.5 to 226.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	268	SF	$120	$32,175
46373	204.3 to 205.3 feet	Vertical Change	.32"	8 ft	8	REF		

TOTAL COST FOR: NE *side of* **S E ST** *Starting at:* **100 7TH ST** **$149,209.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081532	S E ST	320 S E ST	CLINTON ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46346	0.0 to 1.3 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	11	SF	$120	**$1,287**
46347	1.7 to 10.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	75	SF	$120	**$9,009**
46348	11.3 to 12.6 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	11	SF	$120	**$1,287**
46349	14.3 to 19.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	45	SF	$120	**$5,445**
46350	19.8 to 22.3 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	21	SF	$120	**$2,475**
46351	26.3 to 28.1 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	15	SF	$120	**$1,782**
46367	28.6 to 51.1 feet	Key Note Segment		8 ft	186			
46342	29.6 to 30.6 feet	**Vertical Change**	.64"	8 ft	8	REF		
46343	49.9 to 50.9 feet	**Vertical Change**	.31"	8 ft	8	REF		
46352	52.3 to 54.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	21	SF	$120	**$2,475**
46353	58.5 to 65.9 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	61	SF	$120	**$7,326**
46354	66.6 to 73.0 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	53	SF	$120	**$6,336**
46355	76.6 to 86.9 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	85	SF	$120	**$10,197**
46356	87.7 to 91.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	30	SF	$120	**$3,564**
46357	91.7 to 100.5 feet	Cross Slope (PAR)	7.0-8.0%	8 ft	73	SF	$120	**$8,712**
46344	101.2 to 102.2 feet	**Vertical Change**	.38"	8 ft	8	LF	$75	**$619**
46358	102.7 to 117.0 feet	Cross Slope (PAR)	7.0-8.0%	8 ft	118	SF	$120	**$14,157**
46359	119.2 to 123.7 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	37	SF	$120	**$4,455**
46368	124.7 to 145.7 feet	Key Note Segment		8 ft	173			
46360	147.1 to 153.9 feet	Cross Slope (PAR)	11.0-12.0%	8 ft	56	SF	$120	**$6,732**
46370	154.2 to 155.8 feet		5.0-6.0%	8 ft	13			
46361	154.8 to 156.2 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	12	SF	$120	**$1,386**
46362	156.9 to 158.0 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	9	SF	$120	**$1,089**
46363	158.0 to 163.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	48	SF	$120	**$5,742**
46364	163.8 to 164.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$990**
46365	164.8 to 166.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,287**
46366	187.3 to 189.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	21	SF	$120	**$2,574**
46369	196.6 to 209.3 feet	Key Note Segment		8 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081532	S E ST	320 S E ST	CLINTON ST	100

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46345	203.2 to 204.2 feet	Vertical Change	.39"	8 ft	8	REF		

TOTAL COST FOR: SW *side of* **S E ST** *Starting at:* **320 S E ST** **$98,925.75**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081601	S E ST	6TH ST	E YOSEMITE AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46459	0.2 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,016**
46460	9.6 to 10.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
46461	16.8 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,736**
46462	24.6 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	233	SF	$120	**$28,008**
46483	65.6 to 85.3 feet	Key Note Segment		6 ft	118			
46463	86.3 to 88.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	13	SF	$120	**$1,512**
46464	90.8 to 95.1 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	26	SF	$120	**$3,096**
46465	95.1 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	64	SF	$120	**$7,704**
46484	105.8 to 131.6 feet	Key Note Segment		6 ft	155			
46466	132.1 to 147.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	93	SF	$40	**$3,720**
46485	148.6 to 171.4 feet	Key Note Segment		6 ft	137			
46467	172.8 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,512**
46468	179.3 to 187.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	49	SF	$120	**$5,832**
46469	188.3 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
46470	192.3 to 194.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	15	SF	$120	**$1,800**
46471	199.3 to 200.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$864**
46472	202.7 to 211.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,408**
46473	213.8 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,304**
46474	220.1 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$864**
46475	222.1 to 223.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
46476	226.5 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
46477	234.9 to 240.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
46478	243.1 to 249.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
46479	253.5 to 259.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
46480	262.7 to 277.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	89	SF	$120	**$10,656**
46481	277.5 to 278.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	8	SF	$120	**$936**
46482	281.3 to 287.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	39	SF	$120	**$4,680**

TOTAL COST FOR: NE *side of* **S E ST** *Starting at:* **6TH ST** **$104,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081526	S E ST	6TH ST	224 S E ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46321	0.0 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
46338	9.1 to 30.1 feet	Key Note Segment		5 ft	105			
46322	30.8 to 71.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	201	SF	$120	**$24,180**
46323	75.0 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
46324	79.2 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
46325	111.6 to 112.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46326	113.0 to 122.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
46327	122.7 to 124.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
46328	128.3 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
46329	135.6 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
46330	153.3 to 155.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
46339	156.3 to 170.6 feet	Key Note Segment		5 ft	71			
46331	172.3 to 174.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
46332	174.0 to 178.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
46333	181.3 to 192.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
46334	192.0 to 214.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
46319	203.3 to 204.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
46335	216.8 to 220.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
46336	220.7 to 223.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
46340	223.0 to 246.4 feet	Key Note Segment		5 ft	117			
46337	248.0 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
46341	263.4 to 285.4 feet	Key Note Segment		5 ft	110			
46320	283.5 to 284.5 feet	**Vertical Change**	2.39"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S E ST** *Starting at:* **6TH ST** **$98,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081548	S E ST	7TH ST	6TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46432	14.8 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	71	SF	$120	**$8,568**
46433	30.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	**$3,600**
46434	44.6 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	58	SF	$120	**$6,912**
46454	54.2 to 76.6 feet	Key Note Segment		6 ft	134			
46430	63.9 to 64.9 feet	**Vertical Change**	.33"	6 ft	6	REF		
46435	77.7 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
46436	89.8 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	380	SF	$120	**$45,648**
46437	153.2 to 158.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	34	SF	$120	**$4,104**
46438	158.9 to 159.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
46455	161.8 to 191.5 feet	Key Note Segment		6 ft	178			
46439	196.0 to 203.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	47	SF	$120	**$5,688**
46440	204.2 to 242.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	227	SF	$120	**$27,216**
46441	246.7 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	337	SF	$120	**$40,392**
46442	305.3 to 318.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	82	SF	$120	**$9,792**
46443	321.2 to 323.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	16	SF	$120	**$1,944**
46456	325.1 to 346.6 feet	Key Note Segment		6 ft	129			
46444	347.8 to 348.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
46445	348.8 to 359.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	**$7,560**
46446	359.9 to 361.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	7	SF	$120	**$864**
46447	364.3 to 391.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	160	SF	$120	**$19,224**
46448	393.6 to 400.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	41	SF	$120	**$4,896**
46449	400.4 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,448**
46450	403.8 to 414.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	63	SF	$120	**$7,560**
46457	414.6 to 433.2 feet	Key Note Segment		6 ft	112			
46451	434.7 to 462.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	169	SF	$120	**$20,232**
46458	463.7 to 484.3 feet	Key Note Segment		6 ft	124			
46452	491.0 to 492.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	11	SF	$120	**$1,296**
46453	492.8 to 518.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	153	SF	$120	**$18,360**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081548	S E ST	7TH ST	6TH ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE *side of* **S E ST** *Starting at:* **7TH ST**								**$240,336.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081605	S E ST	E YOSEMITE AVE	6TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46486	0.5 to 2.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	13	SF	$120	**$1,512**
46487	4.7 to 13.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	52	SF	$120	**$6,264**
46488	22.3 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	**$7,560**
46489	34.4 to 36.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	11	SF	$120	**$1,368**
46490	38.6 to 56.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	109	SF	$120	**$13,032**
46491	60.1 to 61.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	8	SF	$120	**$936**
46492	64.2 to 68.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
46493	70.0 to 71.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	11	SF	$120	**$1,296**
46494	72.0 to 73.5 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	9	SF	$120	**$1,080**
46495	74.8 to 77.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	18	SF	$120	**$2,160**
46507	81.4 to 116.0 feet	Key Note Segment		6 ft	208			
46496	116.3 to 121.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	32	SF	$40	**$1,296**
46497	122.5 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	56	SF	$120	**$6,768**
46508	133.3 to 154.5 feet	Key Note Segment		6 ft	127			
46498	172.4 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
46499	180.8 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	90	SF	$120	**$10,800**
46500	200.9 to 205.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
46501	218.0 to 223.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	35	SF	$120	**$4,248**
46502	224.8 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
46509	237.9 to 262.3 feet	Key Note Segment		6 ft	146			
46503	264.3 to 265.3 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	6	SF	$120	**$720**
46504	265.3 to 273.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	48	SF	$120	**$5,760**
46505	275.8 to 276.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	6	SF	$120	**$720**
46506	276.8 to 288.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	72	SF	$120	**$8,640**

TOTAL COST FOR: SW *side of* **S E ST** *Starting at:* **E YOSEMITE AVE** **$85,032.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081344	S G ST	11TH ST	629 S G ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45850	2.8 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
45849	11.3 to 12.3 feet	**Vertical Change**	2.3"	5 ft	5	REF		
45851	23.4 to 35.8 feet	Key Note Segment		5 ft	62			

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **11TH ST** **$11,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081355	S G ST	11TH ST	700 S G ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45881	2.7 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
45882	10.8 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
45883	27.2 to 51.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
45885	52.0 to 66.2 feet	Key Note Segment		5 ft	71			
45884	66.2 to 68.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$520**

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **11TH ST** **$24,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081414	S G ST	12TH ST	725 S G ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45965	10.6 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
45966	23.3 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
45967	33.8 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45964	33.9 to 34.9 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **12TH ST** **$12,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105191608	S G ST	200 MADERA AVE	MADERA AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39960	1.9 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
39988	7.9 to 31.4 feet	Key Note Segment		5 ft	118			
39961	31.8 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
39962	54.7 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
39989	72.8 to 98.1 feet	Key Note Segment		5 ft	127			
39963	98.1 to 111.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	65	SF	$40	**$2,580**
39964	121.3 to 126.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
39956	124.0 to 125.0 feet	Vertical Change	.29"	5 ft	5	REF		
39990	126.5 to 150.7 feet	Key Note Segment		5 ft	121			
39965	150.7 to 159.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	45	SF	$40	**$1,780**
39957	160.5 to 161.5 feet	Vertical Change	.51"	5 ft	5	SF	$75	**$375**
39991	160.8 to 186.2 feet	Key Note Segment		5 ft	127			
39966	195.7 to 203.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
39967	203.8 to 209.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
39968	209.3 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39969	215.6 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
39970	231.7 to 245.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
39971	247.6 to 282.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	173	SF	$120	**$20,760**
39958	255.6 to 256.6 feet	Vertical Change	.56"	5 ft	5	REF		
39992	282.2 to 301.3 feet	Key Note Segment		5 ft	96			
39972	302.2 to 306.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
39973	306.4 to 307.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
39974	312.3 to 322.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
39975	325.0 to 344.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
39976	350.1 to 379.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
39977	396.0 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
39993	403.8 to 434.1 feet	Key Note Segment		5 ft	152			
39978	434.1 to 441.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	38	SF	$40	**$1,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105191608	S G ST	200 MADERA AVE	MADERA AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39979	443.8 to 464.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
39980	469.3 to 472.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
39981	475.6 to 496.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
39994	496.3 to 522.9 feet	Key Note Segment		5 ft	133			
39982	522.9 to 529.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,400**
39959	525.2 to 526.2 feet	**Vertical Change**	.68"	5 ft	5	REF		
39983	537.3 to 543.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
39984	551.3 to 558.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39985	563.6 to 583.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
39986	586.2 to 606.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,060**
39987	610.3 to 616.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **200 MADERA AVE** **$189,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191506	S G ST	501 S G ST	EIGHTH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39712	0.0 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
39701	5.2 to 6.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
39732	13.5 to 37.6 feet	Key Note Segment		5 ft	121			
39713	39.4 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
39714	50.1 to 51.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
39715	55.1 to 93.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	190	SF	$120	**$22,740**
39716	95.2 to 115.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,240**
39717	117.6 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,100**
39718	165.0 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
39733	176.8 to 201.8 feet	Key Note Segment		5 ft	125			
39702	199.0 to 200.0 feet	**Vertical Change**	.75"	5 ft	5	REF		
39719	204.9 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
39720	208.3 to 216.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
39721	221.7 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
39722	244.5 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
39703	250.4 to 251.4 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
39723	253.3 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
39704	261.3 to 262.3 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
39724	271.8 to 272.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39705	272.1 to 273.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
39725	277.6 to 281.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
39706	282.9 to 283.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
39726	292.3 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
39707	304.5 to 305.5 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
39727	319.7 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39708	326.1 to 327.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
39728	326.9 to 342.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
39709	336.9 to 337.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191506	S G ST	501 S G ST	EIGHTH ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39729	344.3 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
39710	357.4 to 358.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
39730	359.6 to 362.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
39731	365.5 to 371.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
39711	370.4 to 371.4 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **501 S G ST** **$127,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081346	S G ST	613 S G ST	MADERA AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45854	0.1 to 25.3 feet	Key Note Segment		5 ft	126			
45852	26.4 to 36.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
45853	43.5 to 52.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
45855	64.9 to 82.8 feet	Key Note Segment		5 ft	89			

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **613 S G ST** **$11,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081358	S G ST	709 S G ST	11TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45887	0.0 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
45886	10.7 to 11.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
45892	11.0 to 20.7 feet	Key Note Segment		5 ft	49			
45888	22.4 to 25.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
45889	27.8 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
45890	35.8 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45893	37.3 to 119.8 feet	Key Note Segment		5 ft	413			
45891	119.8 to 122.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **709 S G ST** **$14,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081417	S G ST	724 S G ST	12TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45970	0.0 to 1.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
45971	5.0 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
45969	33.9 to 34.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
45972	39.6 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
45973	58.5 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **724 S G ST** **$24,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191521	S G ST	EIGHTH ST	SEVENTH ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39766	1.3 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
39761	31.2 to 32.2 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
39767	51.0 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
39762	65.7 to 66.7 feet	**Vertical Change**	-1.05"	5 ft	5	SF	$75	**$375**
39782	104.4 to 116.2 feet	Key Note Segment		5 ft	59			
39768	132.2 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
39783	165.8 to 179.4 feet	Key Note Segment		5 ft	68			
39769	192.0 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
39770	199.2 to 218.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
39771	221.7 to 258.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,780**
39764	257.9 to 258.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
39784	258.0 to 270.9 feet	Key Note Segment		5 ft	64			
39772	270.9 to 278.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	40	SF	$40	**$1,600**
39773	286.6 to 296.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,820**
39765	287.3 to 288.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
39774	296.3 to 299.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
39775	302.0 to 306.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
39776	309.0 to 313.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
39777	314.1 to 317.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
39778	317.9 to 319.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
39779	322.5 to 328.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
39780	329.3 to 333.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
39781	335.7 to 340.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **EIGHTH ST** **$64,450.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105191601	S G ST	EIGHTH ST	414 S G ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39939	0.7 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
39940	3.4 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
39927	34.2 to 35.2 feet	**Vertical Change**	2.87"	5 ft	5	SF	$75	**$375**
39928	38.1 to 39.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
39952	50.2 to 66.2 feet	Key Note Segment		5 ft	80			
39941	69.9 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
39942	75.2 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
39953	84.4 to 98.7 feet	Key Note Segment		5 ft	72			
39943	98.8 to 100.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	10	SF	$40	**$400**
39929	99.5 to 100.5 feet	**Vertical Change**	1.4"	5 ft	5	REF		
39944	103.1 to 107.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,640**
39930	108.4 to 109.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
39945	111.8 to 114.2 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	12	SF	$120	**$1,440**
39931	115.0 to 116.0 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
39946	118.8 to 151.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	164	SF	$120	**$19,680**
39932	141.3 to 142.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
39947	153.8 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
39933	154.2 to 155.2 feet	**Vertical Change**	.56"	5 ft	5	REF		
39934	157.7 to 158.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
39935	177.3 to 178.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
39948	178.3 to 192.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
39949	193.7 to 194.7 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	5	SF	$120	**$600**
39936	195.1 to 196.1 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
39950	196.2 to 197.3 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	6	SF	$120	**$660**
39937	196.8 to 197.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
39938	203.6 to 204.6 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
39951	205.7 to 213.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	40	SF	$120	**$4,740**
39954	209.6 to 210.9 feet		5.0-6.0%	5 ft	7			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105191601	S G ST	EIGHTH ST	414 S G ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39955	210.9 to 213.1 feet		6.0-7.0%	5 ft	11			

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **EIGHTH ST** **$81,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081349	S G ST	MADERA AVE	11TH ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45856	0.1 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
45857	25.7 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
45864	32.7 to 91.4 feet	Key Note Segment		5 ft	293			
45858	94.2 to 103.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
45859	103.3 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
45860	115.8 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
45861	123.3 to 131.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
45862	133.7 to 134.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
45863	134.7 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **MADERA AVE** **$35,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191530	S G ST	SEVENTH ST	SIXTH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39806	19.2 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
39807	29.0 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
39808	49.6 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
39809	59.2 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
39832	62.3 to 76.5 feet	Key Note Segment		5 ft	71			
39800	85.3 to 86.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
39833	91.2 to 96.8 feet	Key Note Segment		5 ft	28			
39810	96.8 to 101.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
39801	97.2 to 98.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
39802	100.5 to 101.5 feet	**Vertical Change**	1.89"	5 ft	5	REF		
39811	103.3 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
39812	109.4 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
39803	119.6 to 120.6 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
39835	121.9 to 122.9 feet	**Protruding Object**	36"	5 ft	5	JOB	$99	**$99**
39804	126.1 to 127.1 feet	**Vertical Change**	-1.01"	5 ft	5	SF	$75	**$375**
39813	131.4 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
39814	136.2 to 149.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
39815	149.9 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39816	164.3 to 173.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
39817	174.6 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
39818	184.3 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
39805	195.0 to 196.0 feet	**Vertical Change**	-.63"	5 ft	5	REF		
39819	195.8 to 202.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
39834	202.7 to 214.5 feet	Key Note Segment		5 ft	59			
39820	215.3 to 223.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
39821	223.9 to 229.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
39822	231.9 to 246.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
39823	246.9 to 248.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191530	S G ST	SEVENTH ST	SIXTH ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39824	251.3 to 272.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	108	SF	$120	**$12,960**
39825	275.3 to 286.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
39826	286.3 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
39827	303.3 to 304.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
39828	305.6 to 309.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
39829	317.9 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
39830	328.0 to 344.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
39831	344.6 to 345.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: NE *side of* **S G ST** *Starting at:* **SEVENTH ST** **$117,424.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105191535	S G ST	SIXTH ST	SEVENTH ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39836	48.0 to 49.0 feet	Vertical Change	3.6"	6 ft	6	SF	$75	$450
39839	51.8 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	$3,312
39840	63.4 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	100	SF	$120	$12,024
39837	80.6 to 81.6 feet	Vertical Change	.32"	6 ft	6	LF	$75	$450
39841	83.8 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	$1,728
39842	90.6 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	106	SF	$120	$12,744
39843	116.9 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	$5,832
39844	127.9 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	82	SF	$120	$9,792
39845	144.3 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	$5,544
39846	154.1 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	42	SF	$120	$5,040
39847	168.6 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	45	SF	$120	$5,400
39848	184.4 to 188.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	$2,592
39849	193.7 to 200.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	$4,608
39850	207.4 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	194	SF	$120	$23,328
39852	240.0 to 273.8 feet	Key Note Segment		6 ft	203			
39851	274.6 to 336.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	374	SF	$120	$44,856
39838	280.7 to 281.7 feet	Vertical Change	.29"	6 ft	6	REF		

TOTAL COST FOR: SW *side of* **S G ST** *Starting at:* **SIXTH ST** **$137,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081338	S GATEWAY DR	10TH ST	11TH ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45805	0.0 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
45820	10.0 to 27.9 feet	Key Note Segment		5 ft	90			
45806	29.8 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
45807	37.9 to 49.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
45821	49.4 to 82.4 feet	Key Note Segment		5 ft	165			
45808	82.4 to 94.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
45799	82.7 to 83.7 feet	Vertical Change	.35"	5 ft	5	REF		
45809	97.8 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
45822	116.5 to 140.0 feet	Key Note Segment		5 ft	118			
45810	140.0 to 141.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$300**
45823	152.8 to 180.2 feet	Key Note Segment		5 ft	137			
45811	190.8 to 222.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,840**
45800	221.8 to 222.8 feet	Vertical Change	-.28"	5 ft	5	REF		
45824	224.8 to 266.2 feet	Key Note Segment		5 ft	207			
45801	256.4 to 257.4 feet	Vertical Change	.36"	5 ft	5	REF		
45812	266.2 to 269.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	**$660**
45813	273.1 to 275.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
45814	275.4 to 276.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45815	279.9 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
45802	283.3 to 284.3 feet	Vertical Change	.3"	5 ft	5	REF		
45816	303.0 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
45817	308.3 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
45818	322.9 to 325.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
45803	326.2 to 327.2 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
45819	329.9 to 336.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45804	334.7 to 335.7 feet	Vertical Change	.29"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **10TH ST** **$77,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081501	S GATEWAY DR	11TH ST	9TH ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46192	6.6 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
46193	18.0 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46194	30.0 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
46195	71.1 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
46225	73.3 to 112.8 feet	Key Note Segment		5 ft	198			
46196	115.7 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
46197	131.5 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
46198	143.2 to 201.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	290	SF	$120	**$34,800**
46186	158.3 to 159.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
46199	210.7 to 215.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
46200	215.3 to 216.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
46201	219.3 to 231.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
46226	232.6 to 250.8 feet	Key Note Segment		5 ft	91			
46187	233.6 to 234.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
46202	250.9 to 252.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
46203	253.9 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
46204	268.8 to 272.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
46205	277.2 to 280.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
46206	281.1 to 282.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
46207	294.1 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
46208	324.0 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
46209	331.5 to 333.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
46210	338.3 to 340.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
46227	340.7 to 361.3 feet	Key Note Segment		5 ft	103			
46211	362.6 to 373.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
46212	378.4 to 413.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
46213	420.1 to 445.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
46228	453.5 to 487.8 feet	Key Note Segment		5 ft	172			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081501	S GATEWAY DR	11TH ST	9TH ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46189	508.9 to 509.9 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
46214	516.8 to 519.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
46215	523.7 to 530.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,260
46216	531.1 to 534.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
46217	534.7 to 540.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,660
46218	540.8 to 546.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,120
46219	546.0 to 547.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$780
46220	549.8 to 553.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
46190	557.3 to 558.3 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
46221	569.1 to 580.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,960
46222	589.1 to 604.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,000
46223	608.6 to 611.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
46229	611.4 to 663.5 feet	Key Note Segment		5 ft	261			
46191	661.7 to 662.7 feet	Vertical Change	1.16"	5 ft	5	REF		
46231	663.8 to 665.1 feet		5.0-6.0%	5 ft	7			
46224	668.4 to 685.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	$10,140
46230	685.3 to 727.3 feet	Key Note Segment		5 ft	210			

TOTAL COST FOR: NE *side of* **S GATEWAY DR** *Starting at:* **11TH ST** **$187,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081410	S GATEWAY DR	11TH ST	12TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45928	2.9 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
45929	12.2 to 13.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
45930	16.0 to 22.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
45924	18.0 to 19.0 feet	**Vertical Change**	2.16"	5 ft	5	REF		
45931	48.3 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
45932	67.9 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
45933	76.5 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
45951	86.2 to 104.1 feet	Key Note Segment		5 ft	90			
45934	104.1 to 109.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
45935	109.3 to 112.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
45936	113.1 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
45937	135.9 to 164.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
45938	166.9 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
45952	171.5 to 188.8 feet	Key Note Segment		5 ft	87			
45939	188.8 to 195.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
45940	197.5 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,080**
45953	229.3 to 242.3 feet	Key Note Segment		5 ft	65			
45941	244.2 to 252.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
45925	255.6 to 256.6 feet	**Vertical Change**	.8"	5 ft	5	REF		
45942	256.2 to 261.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
45943	264.9 to 268.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	16	SF	$120	**$1,860**
45944	268.9 to 270.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
45945	272.7 to 280.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
45946	280.6 to 282.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
45947	289.2 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
45948	307.7 to 318.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
45949	319.4 to 321.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
45950	334.7 to 336.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081410	S GATEWAY DR	11TH ST	12TH ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45927	335.4 to 336.4 feet	Vertical Change	-.29"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **11TH ST** **$99,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081425	S GATEWAY DR	12TH ST	OLIVE AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45977	0.8 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45978	12.5 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
45979	24.3 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45980	27.9 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
45974	40.8 to 41.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
45981	47.4 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45982	51.0 to 55.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
45983	55.1 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
46003	76.0 to 102.1 feet	Key Note Segment		5 ft	131			
45984	102.7 to 105.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
45985	105.8 to 117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
46004	121.0 to 181.5 feet	Key Note Segment		5 ft	303			
45975	175.2 to 176.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
45986	195.5 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
46005	198.4 to 213.0 feet	Key Note Segment		5 ft	73			
45987	213.0 to 215.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
46006	224.5 to 240.6 feet	Key Note Segment		5 ft	81			
45988	240.6 to 242.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
45989	242.2 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45990	246.3 to 270.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
46007	270.5 to 297.8 feet	Key Note Segment		5 ft	137			
45991	302.0 to 307.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
45992	310.3 to 327.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
45993	331.8 to 336.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
45994	339.8 to 340.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46008	340.9 to 365.8 feet	Key Note Segment		5 ft	125			
45995	366.9 to 376.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
45996	380.3 to 383.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081425	S GATEWAY DR	12TH ST	OLIVE AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45997	385.7 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
45998	408.0 to 410.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
45999	435.2 to 442.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
46000	449.9 to 451.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
46001	461.8 to 471.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
46002	475.2 to 476.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: SE *side of* **S GATEWAY DR** *Starting at:* **12TH ST** **$105,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081517	S GATEWAY DR	200 S GATEWAY DR	6TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46252	2.3 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
46253	21.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
46254	27.2 to 35.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
46255	42.8 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
46256	53.7 to 54.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46257	55.7 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
46258	59.5 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
46259	72.4 to 78.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
46260	80.9 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
46261	96.2 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
46262	103.8 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
46263	109.9 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
46264	118.3 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
46265	125.0 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46296	129.3 to 170.0 feet	Key Note Segment		5 ft	203			
46266	171.0 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
46267	175.0 to 176.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
46268	181.0 to 187.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
46269	191.6 to 193.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
46270	193.1 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
46271	210.1 to 211.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46272	224.5 to 225.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
46273	232.0 to 239.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
46274	246.7 to 250.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
46275	253.3 to 254.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
46276	257.3 to 263.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
46277	266.6 to 267.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
46278	293.1 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081517	S GATEWAY DR	200 S GATEWAY DR	6TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46279	304.7 to 305.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
46280	311.3 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46281	317.1 to 323.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
46282	326.6 to 332.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
46283	333.7 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46284	337.3 to 338.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
46285	341.3 to 342.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
46286	346.3 to 347.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
46287	353.2 to 354.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
46288	358.7 to 360.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
46289	360.6 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
46290	368.9 to 370.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
46291	376.5 to 378.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
46292	380.1 to 381.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
46293	384.8 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
46294	393.4 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
46295	408.6 to 415.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
46251	412.8 to 413.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **S GATEWAY DR** *Starting at:* **200 S GATEWAY DR** **$100,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081512	S GATEWAY DR	309 S GATEWAY DR	309 S GATEWAY DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46249	1.0 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
46250	40.7 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
46248	54.2 to 55.2 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **S GATEWAY DR** *Starting at:* **309 S GATEWAY DR** **$19,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081509	S GATEWAY DR	409 S GATEWAY DR	409 S GATEWAY DR	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46234	0.0 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
46232	4.3 to 5.3 feet	**Vertical Change**	-.45"	5 ft	5	REF		
46247	7.3 to 8.5 feet		5.0-6.0%	5 ft	6			
46235	19.8 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
46236	23.7 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
46237	31.6 to 40.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
46238	43.2 to 53.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
46239	56.2 to 57.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
46246	59.6 to 82.0 feet	Key Note Segment		5 ft	112			
46240	82.6 to 94.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
46241	94.3 to 97.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
46233	106.3 to 107.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
46242	109.4 to 111.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
46243	111.3 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
46244	124.3 to 127.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
46245	130.3 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**

TOTAL COST FOR: NE *side of* **S GATEWAY DR** *Starting at:* **409 S GATEWAY DR** **$55,335.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081334	S GATEWAY DR	514 S GATEWAY DR	10TH ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45788	2.4 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
45789	5.5 to 8.6 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	19	SF	$120	**$2,232**
45790	15.0 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	50	SF	$120	**$5,976**
45791	29.1 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
45792	34.3 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
45793	41.3 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	36	SF	$120	**$4,320**
45794	50.9 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,088**
45795	53.8 to 63.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	56	SF	$120	**$6,768**
45796	68.3 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	64	SF	$120	**$7,704**
45797	79.5 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	29	SF	$120	**$3,456**
45798	85.0 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,944**

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **514 S GATEWAY DR** **$40,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081620	S GATEWAY DR	6TH ST	E YOSEMITE AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46534	0.4 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,152**
46535	2.0 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	149	SF	$120	**$17,856**
46536	27.3 to 34.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	43	SF	$120	**$5,184**
46537	34.8 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,408**
46538	46.5 to 48.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,152**
46539	50.1 to 80.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	183	SF	$120	**$21,960**
46551	81.2 to 112.0 feet	Key Note Segment		6 ft	185			
46540	112.9 to 138.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	154	SF	$120	**$18,432**
46541	138.8 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,584**
46542	148.3 to 162.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	84	SF	$120	**$10,080**
46543	168.8 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	18	SF	$120	**$2,160**
46544	172.2 to 182.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	61	SF	$120	**$7,344**
46545	182.4 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
46546	186.3 to 187.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	8	SF	$120	**$1,008**
46552	187.7 to 232.4 feet	Key Note Segment		6 ft	268			
46547	232.4 to 236.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	25	SF	$40	**$1,008**
46548	241.4 to 262.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	127	SF	$120	**$15,192**
46549	270.0 to 272.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	14	SF	$120	**$1,728**
46550	276.8 to 283.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	38	SF	$120	**$4,536**

TOTAL COST FOR: NE *side of* **S GATEWAY DR** *Starting at:* **6TH ST** **$119,592.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081625	S GATEWAY DR	E YOSEMITE AVE	6TH ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46561	3.3 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	18	SF	$120	**$2,160**
46562	10.8 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
46563	12.4 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
46564	40.3 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
46565	45.4 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	11	SF	$120	**$1,296**
46566	47.8 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	115	SF	$120	**$13,752**
46553	103.7 to 104.7 feet	**Vertical Change**	.77"	6 ft	6	SF	$75	**$450**
46567	156.4 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
46554	158.5 to 159.5 feet	**Vertical Change**	1.45"	6 ft	6	REF		
46555	161.3 to 162.3 feet	**Vertical Change**	2.05"	6 ft	6	SF	$75	**$450**
46556	174.6 to 175.6 feet	**Vertical Change**	.34"	6 ft	6	LF	$75	**$450**
46568	180.4 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
46557	184.2 to 185.2 feet	**Vertical Change**	.27"	6 ft	6	REF		
46569	198.0 to 200.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
46570	202.9 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$3,024**
46571	232.3 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	18	SF	$120	**$2,160**
46574	236.4 to 238.0 feet		5.0-6.0%	6 ft	10			
46558	239.6 to 240.6 feet	**Vertical Change**	.31"	6 ft	6	LF	$75	**$450**
46572	241.2 to 242.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
46559	249.6 to 250.6 feet	**Vertical Change**	-.28"	6 ft	6	LF	$75	**$450**
46573	265.0 to 275.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,488**
46575	285.3 to 286.3 feet		5.0-6.0%	6 ft	6			

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **E YOSEMITE AVE** **$43,578.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081326	S GATEWAY DR	EIGHTH ST	MADERA AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45744	0.1 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
45745	24.8 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,700**
45746	41.6 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
45747	71.1 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
45748	73.3 to 86.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
45749	86.2 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
45750	101.3 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
45741	117.5 to 118.5 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
45751	119.3 to 121.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
45752	121.9 to 126.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
45742	124.3 to 125.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
45753	127.7 to 131.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
45754	132.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45755	139.8 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
45756	145.4 to 148.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
45757	149.3 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45758	162.2 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45759	166.8 to 173.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
45743	172.2 to 173.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
45774	174.2 to 199.6 feet	Key Note Segment		5 ft	127			
45760	201.2 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
45761	206.8 to 220.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
45762	220.0 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
45763	254.6 to 258.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
45764	259.8 to 282.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
45765	284.9 to 297.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
45766	297.2 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	213	SF	$120	**$25,560**
45767	344.5 to 373.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081326	S GATEWAY DR	EIGHTH ST	MADERA AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45768	375.8 to 386.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
45769	392.6 to 402.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
45770	411.8 to 413.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
45775	418.0 to 448.8 feet	Key Note Segment		5 ft	154			
45771	450.8 to 461.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
45772	473.7 to 478.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
45773	484.8 to 491.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **EIGHTH ST** **$192,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081450	S GATEWAY DR	OLIVE AVE	11TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46106	2.3 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
46107	8.5 to 11.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
46159	13.3 to 42.0 feet	Key Note Segment		5 ft	144			
46108	42.4 to 46.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$740**
46091	51.0 to 52.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
46109	55.8 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
46110	58.3 to 62.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
46111	62.2 to 79.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
46160	79.8 to 163.5 feet	Key Note Segment		5 ft	419			
46112	163.5 to 165.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$360**
46092	166.6 to 167.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
46113	171.8 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
46114	182.3 to 185.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
46093	182.5 to 183.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
46115	189.2 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
46161	213.2 to 227.1 feet	Key Note Segment		5 ft	70			
46094	225.4 to 226.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
46116	229.4 to 231.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
46117	232.4 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
46118	236.0 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
46119	239.8 to 254.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
46120	255.0 to 256.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
46095	274.7 to 275.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
46121	285.4 to 304.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
46162	304.1 to 321.6 feet	Key Note Segment		5 ft	88			
46122	337.3 to 344.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
46096	351.3 to 352.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
46097	353.2 to 354.2 feet	**Vertical Change**	-.66"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081450	S GATEWAY DR	OLIVE AVE	11TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46163	356.9 to 377.0 feet	Key Note Segment		5 ft	101			
46164	380.4 to 398.1 feet	Key Note Segment		5 ft	89			
46165	402.6 to 418.5 feet	Key Note Segment		5 ft	80			
46098	403.5 to 404.5 feet	Vertical Change	-.62"	5 ft	5	REF		
46123	418.5 to 422.7 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	21	SF	$40	$840
46124	423.0 to 442.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	$11,580
46125	443.8 to 452.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	$4,980
46166	454.2 to 472.7 feet	Key Note Segment		5 ft	93			
46100	476.5 to 477.5 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
46126	479.3 to 480.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
46127	484.3 to 485.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
46128	486.2 to 488.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
46167	488.7 to 517.0 feet	Key Note Segment		5 ft	142			
46129	518.3 to 544.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	$15,900
46130	547.9 to 551.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,340
46131	552.1 to 561.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
46101	575.4 to 576.4 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
46168	581.5 to 602.1 feet	Key Note Segment		5 ft	103			
46132	603.6 to 616.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	$7,860
46133	619.6 to 624.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
46134	626.7 to 658.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	157	SF	$120	$18,840
46135	660.7 to 666.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
46136	668.5 to 681.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	65	SF	$120	$7,800
46137	684.3 to 700.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	$9,600
46138	703.9 to 708.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	$2,700
46139	710.5 to 712.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	$1,440
46102	717.7 to 718.7 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
46140	720.2 to 734.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	$8,460

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081450	S GATEWAY DR	OLIVE AVE	11TH ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46103	726.3 to 727.3 feet	Vertical Change	-.26"	5 ft	5	REF		
46141	736.8 to 738.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
46142	743.1 to 768.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	$15,120
46143	768.8 to 770.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	$1,200
46144	771.3 to 773.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	$1,380
46145	773.6 to 780.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	$3,900
46146	780.9 to 788.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
46147	791.2 to 794.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
46148	796.2 to 802.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
46149	805.5 to 814.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,220
46150	815.3 to 817.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
46151	831.7 to 862.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	$18,480
46104	832.2 to 833.2 feet	Vertical Change	.35"	5 ft	5	REF		
46152	867.3 to 868.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
46153	878.8 to 880.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
46154	892.1 to 897.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
46155	908.6 to 912.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
46169	916.8 to 951.3 feet	Key Note Segment		5 ft	173			
46156	952.7 to 956.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
46105	954.4 to 955.4 feet	Vertical Change	2.84"	5 ft	5	REF		
46157	956.3 to 958.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
46158	964.0 to 970.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
46170	971.0 to 972.3 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: NE *side of* **S GATEWAY DR** *Starting at:* **OLIVE AVE** **$241,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081321	S GATEWAY DR	SEVENTH ST	EIGHTH ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45714	4.2 to 5.2 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
45715	7.9 to 8.9 feet	Vertical Change	.82"	5 ft	5	SF	$75	$375
45722	9.8 to 11.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$900
45723	13.3 to 21.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
45724	24.0 to 29.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
45725	34.3 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
45738	39.9 to 83.8 feet	Key Note Segment		5 ft	220			
45716	59.0 to 60.0 feet	Vertical Change	.26"	5 ft	5	REF		
45717	61.5 to 62.5 feet	Vertical Change	-.27"	5 ft	5	REF		
45726	83.8 to 89.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	26	SF	$40	$1,040
45718	86.1 to 87.1 feet	Vertical Change	-.26"	5 ft	5	REF		
45727	92.8 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
45739	97.1 to 187.8 feet	Key Note Segment		5 ft	454			
45719	178.5 to 179.5 feet	Vertical Change	.38"	5 ft	5	REF		
45720	188.5 to 189.5 feet	Vertical Change	.28"	5 ft	5	REF		
45728	193.3 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
45729	213.8 to 220.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
45740	220.8 to 287.8 feet	Key Note Segment		5 ft	335			
45730	287.8 to 292.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	$940
45731	293.0 to 299.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
45732	301.5 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,780
45733	315.9 to 319.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
45734	321.4 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
45735	330.8 to 337.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
45736	337.2 to 349.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,560
45737	349.8 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980

TOTAL COST FOR: SW *side of* **S GATEWAY DR** *Starting at:* **SEVENTH ST** **$50,370.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081316	S GATEWAY DR	SIXTH ST	SEVENTH ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45690	0.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
45691	9.5 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
45686	27.0 to 28.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
45692	35.9 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
45693	41.5 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
45687	44.6 to 45.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
45694	44.9 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45688	50.9 to 51.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
45695	76.2 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
45711	85.0 to 108.4 feet	Key Note Segment		5 ft	117			
45696	108.4 to 124.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	80	SF	$40	**$3,180**
45697	142.7 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
45698	157.3 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
45689	195.2 to 196.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
45712	196.7 to 214.8 feet	Key Note Segment		5 ft	91			
45699	220.0 to 230.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
45713	234.0 to 255.9 feet	Key Note Segment		5 ft	110			
45700	257.6 to 260.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
45701	262.1 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
45702	269.2 to 293.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
45703	294.8 to 297.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
45704	297.7 to 302.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
45705	304.6 to 308.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
45706	308.8 to 318.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
45707	318.0 to 322.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
45708	322.1 to 325.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
45709	328.8 to 331.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
45710	331.0 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106081316	S GATEWAY DR	SIXTH ST	SEVENTH ST	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW	*side of* **S GATEWAY DR**	*Starting at:* **SIXTH ST**						**$80,730.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191549	S H ST	417 S H ST	EIGHTH ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39874	0.8 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
39875	9.1 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
39876	19.8 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
39877	30.3 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
39878	50.2 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
39886	56.3 to 69.6 feet	Key Note Segment		5 ft	66			
39879	73.3 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
39880	110.4 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
39881	126.4 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
39882	144.1 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
39883	153.4 to 157.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
39887	158.8 to 181.8 feet	Key Note Segment		5 ft	115			
39884	182.3 to 183.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
39885	188.9 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
39888	192.2 to 194.6 feet		5.0-6.0%	5 ft	12			
39889	192.2 to 197.3 feet	Running Slope	5.0-6.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: NE *side of* **S H ST** *Starting at:* **417 S H ST** **$48,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081305	S H ST	CONSTRUCTION	SIXTH ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45642	2.8 to 25.8 feet	Key Note Segment		6 ft	138			
45620	23.2 to 24.2 feet	Vertical Change	.26"	6 ft	6	REF		
45624	27.3 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
45625	33.8 to 35.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$1,008**
45626	37.3 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,328**
45627	49.4 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
45643	53.8 to 108.6 feet	Key Note Segment		6 ft	329			
45621	104.5 to 105.5 feet	Vertical Change	.43"	6 ft	6	REF		
45628	110.8 to 111.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
45629	112.7 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
45630	117.4 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	59	SF	$120	**$7,128**
45644	128.1 to 161.8 feet	Key Note Segment		6 ft	202			
45631	162.3 to 165.3 feet	Cross Slope (Driveway)	2.0-3.0%	6 ft	18	SF	$40	**$720**
45632	168.9 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
45622	171.8 to 172.8 feet	Vertical Change	.31"	6 ft	6	REF		
45633	180.2 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
45634	189.8 to 197.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	48	SF	$120	**$5,760**
45635	206.3 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	42	SF	$120	**$5,040**
45636	221.6 to 223.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	13	SF	$120	**$1,584**
45637	224.0 to 227.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
45623	225.3 to 226.3 feet	Vertical Change	.27"	6 ft	6	REF		
45638	229.9 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	**$5,904**
45639	241.0 to 247.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	39	SF	$120	**$4,680**
45640	249.9 to 253.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,664**
45641	256.5 to 298.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	252	SF	$120	**$30,240**

TOTAL COST FOR: NE *side of* **S H ST** *Starting at:* **CONSTRUCTION** **$87,336.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191552	S H ST	EIGHTH ST	317 S H ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39894	0.0 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	16	SF	$120	**$1,944**
39895	2.7 to 4.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
39896	7.2 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
39901	10.2 to 46.1 feet	Key Note Segment		6 ft	215			
39890	22.7 to 23.7 feet	**Vertical Change**	.35"	6 ft	6	REF		
39891	32.3 to 33.3 feet	**Vertical Change**	-.35"	6 ft	6	REF		
39892	45.1 to 46.1 feet	**Vertical Change**	.29"	6 ft	6	REF		
39897	46.1 to 58.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	73	SF	$40	**$2,928**
39902	58.3 to 71.1 feet	Key Note Segment		6 ft	77			
39898	72.5 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	89	SF	$120	**$10,656**
39899	98.4 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
39900	129.4 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
39893	134.8 to 135.8 feet	**Vertical Change**	.29"	6 ft	6	LF	$75	**$450**
39903	152.3 to 166.1 feet	Key Note Segment		6 ft	83			

TOTAL COST FOR: NE *side of* **S H ST** *Starting at:* **EIGHTH ST** **$24,474.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106081635	S H ST	SIXTH ST	W YOSEMITE AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46622	0.7 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
46623	11.8 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	60	SF	$120	**$7,200**
46624	29.5 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
46625	32.9 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
46619	38.8 to 39.8 feet	**Vertical Change**	.43"	6 ft	6	REF		
46626	39.3 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	**$5,832**
46627	55.3 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	81	SF	$120	**$9,720**
46628	71.3 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,368**
46629	93.4 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
46630	104.6 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,304**
46620	110.0 to 111.0 feet	**Vertical Change**	.5"	6 ft	6	SF	$75	**$450**
46631	113.7 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,872**
46621	120.6 to 121.6 feet	**Vertical Change**	.35"	6 ft	6	LF	$75	**$450**
46632	134.4 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
46633	155.6 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	97	SF	$120	**$11,664**
46634	179.3 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	45	SF	$120	**$5,400**
46635	208.3 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	123	SF	$120	**$14,760**
46636	232.3 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,872**
46637	255.3 to 264.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	55	SF	$120	**$6,552**
46638	273.3 to 275.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
46639	278.4 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,328**
46640	292.8 to 299.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	40	SF	$120	**$4,824**

TOTAL COST FOR: NE *side of* **S H ST** *Starting at:* **SIXTH ST** **$85,932.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171616	S I ST	605 S I ST	NINTH ST	130

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36259	0.0 to 65.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	392	SF	$120	**$47,088**
36260	66.9 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	125	SF	$120	**$14,976**
36290	88.9 to 124.5 feet	Key Note Segment		6 ft	214			
36261	125.3 to 130.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	30	SF	$120	**$3,600**
36262	130.3 to 150.6 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	122	SF	$120	**$14,616**
36263	150.6 to 160.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	56	SF	$120	**$6,768**
36264	160.3 to 165.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	30	SF	$120	**$3,600**
36265	168.3 to 171.0 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	16	SF	$120	**$1,944**
36266	171.0 to 172.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	11	SF	$120	**$1,296**
36267	174.1 to 175.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	10	SF	$120	**$1,224**
36268	176.6 to 194.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	109	SF	$120	**$13,104**
36269	195.2 to 199.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	25	SF	$120	**$2,952**
36270	200.3 to 204.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	27	SF	$120	**$3,240**
36271	204.8 to 207.9 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	19	SF	$120	**$2,232**
36272	208.3 to 241.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	201	SF	$120	**$24,120**
36246	233.5 to 234.5 feet	**Vertical Change**	3"	6 ft	6	SF	$75	**$450**
36273	241.8 to 266.6 feet	Cross Slope (PAR)	8.0-9.0%	6 ft	149	SF	$120	**$17,856**
36274	266.6 to 284.1 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	105	SF	$120	**$12,600**
36291	284.1 to 302.3 feet	Key Note Segment		6 ft	109			
36275	302.3 to 309.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	6 ft	42	SF	$40	**$1,680**
36276	309.3 to 311.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	11	SF	$120	**$1,296**
36292	311.1 to 332.4 feet	Key Note Segment		6 ft	128			
36277	332.8 to 357.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	147	SF	$120	**$17,640**
36293	357.6 to 377.2 feet	Key Note Segment		6 ft	118			
36247	358.6 to 359.6 feet	**Vertical Change**	.32"	6 ft	6	REF		
36248	376.1 to 377.1 feet	**Vertical Change**	-.32"	6 ft	6	REF		
36278	378.9 to 395.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	100	SF	$120	**$12,024**
36249	397.5 to 398.5 feet	**Vertical Change**	.81"	6 ft	6	SF	$75	**$450**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171616	S I ST	605 S I ST	NINTH ST	130

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36279	402.4 to 469.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	401	SF	$120	**$48,168**
36250	418.9 to 419.9 feet	**Vertical Change**	.29"	6 ft	6	REF		
36251	461.8 to 462.8 feet	**Vertical Change**	.27"	6 ft	6	REF		
36252	483.4 to 484.4 feet	**Vertical Change**	.36"	6 ft	6	LF	$75	**$450**
36280	492.6 to 496.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$3,024**
36281	502.1 to 529.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	161	SF	$120	**$19,368**
36253	504.9 to 505.9 feet	**Vertical Change**	-.26"	6 ft	6	REF		
36254	526.4 to 527.4 feet	**Vertical Change**	-.27"	6 ft	6	REF		
36282	531.4 to 540.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	55	SF	$120	**$6,552**
36283	544.6 to 571.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	160	SF	$120	**$19,152**
36255	547.7 to 548.7 feet	**Vertical Change**	-.29"	6 ft	6	REF		
36256	569.2 to 570.2 feet	**Vertical Change**	-.28"	6 ft	6	REF		
36284	573.7 to 601.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	164	SF	$120	**$19,656**
36294	601.0 to 621.7 feet	Key Note Segment		6 ft	124			
36257	621.1 to 622.1 feet	**Vertical Change**	-.28"	6 ft	6	REF		
36285	622.8 to 635.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	74	SF	$120	**$8,856**
36286	635.7 to 644.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	54	SF	$120	**$6,480**
36287	644.8 to 647.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	14	SF	$120	**$1,656**
36295	647.1 to 666.4 feet	Key Note Segment		6 ft	116			
36288	667.2 to 672.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,672**
36289	672.3 to 691.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	116	SF	$120	**$13,896**

TOTAL COST FOR: NE *side of* **S I ST** *Starting at:* **605 S I ST** **$355,686.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171630	S I ST	EIGHTH ST	SEVENTH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36340	24.1 to 25.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
36330	28.8 to 29.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
36331	41.9 to 42.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
36341	43.4 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
36342	69.2 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
36332	129.8 to 130.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
36343	145.4 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
36344	150.4 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
36333	151.3 to 152.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
36345	159.8 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
36346	172.4 to 198.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
36335	191.0 to 192.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
36336	197.6 to 198.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
36347	198.4 to 222.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,580**
36337	204.2 to 205.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
36348	222.7 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
36338	228.1 to 229.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
36349	238.3 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
36339	254.0 to 255.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
36350	254.9 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
36351	261.3 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
36352	269.3 to 286.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
36353	287.2 to 305.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
36354	305.5 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
36355	336.2 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
36356	344.7 to 345.7 feet	Running Slope	5.0-6.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: NE *side of* **S I ST** *Starting at:* **EIGHTH ST** **$119,685.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171701	S I ST	EIGHTH ST	424 S I ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36536	16.6 to 17.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
36537	39.5 to 40.5 feet	Vertical Change	.56"	5 ft	5	SF	$75	$375
36548	43.2 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
36549	49.7 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
36538	50.4 to 51.4 feet	Vertical Change	.5"	5 ft	5	REF		
36539	63.7 to 64.7 feet	Vertical Change	3.4"	5 ft	5	SF	$75	$375
36555	70.2 to 79.7 feet	Key Note Segment		5 ft	48			
36540	108.8 to 109.8 feet	Vertical Change	2.2"	5 ft	5	SF	$75	$375
36556	115.1 to 123.0 feet	Key Note Segment		5 ft	40			
36550	156.1 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
36557	158.0 to 166.3 feet	Key Note Segment		5 ft	42			
36541	190.9 to 191.9 feet	Vertical Change	-.64"	5 ft	5	SF	$75	$375
36551	192.3 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
36542	199.5 to 200.5 feet	Vertical Change	-1.41"	5 ft	5	SF	$75	$375
36558	200.1 to 207.3 feet	Key Note Segment		5 ft	36			
36552	207.3 to 214.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	35	SF	$40	$1,380
36553	218.9 to 222.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
36543	223.5 to 224.5 feet	Vertical Change	1.01"	5 ft	5	SF	$75	$375
36554	235.2 to 238.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
36559	245.2 to 255.1 feet	Key Note Segment		5 ft	50			
36544	246.4 to 247.4 feet	Vertical Change	-.28"	5 ft	5	REF		
36545	262.1 to 263.1 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
36546	285.6 to 286.6 feet	Vertical Change	-.53"	5 ft	5	SF	$75	$375
36547	288.0 to 289.0 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
36560	288.8 to 296.8 feet	Key Note Segment		5 ft	40			

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **EIGHTH ST** **$14,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181031	S I ST	FIFTH ST	W YOSEMITE AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36946	0.1 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
36947	7.0 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**
36948	40.4 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
36949	47.2 to 50.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
36941	50.7 to 51.7 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
36950	54.1 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
36961	56.1 to 82.3 feet	Key Note Segment		5 ft	131			
36942	82.5 to 83.5 feet	**Vertical Change**	-.56"	5 ft	5	REF		
36951	83.7 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	266	SF	$120	**$31,860**
36952	139.0 to 140.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
36953	140.7 to 166.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
36943	155.4 to 156.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
36954	168.8 to 170.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
36955	170.3 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
36956	217.8 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
36944	218.6 to 219.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
36957	226.4 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
36958	241.9 to 249.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
36959	252.1 to 254.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
36960	260.1 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,560**
36945	276.7 to 277.7 feet	**Vertical Change**	.65"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **FIFTH ST** **$122,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105181027	S I ST	FOURTH ST	FIFTH ST	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36929	0.3 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
36939	3.3 to 15.8 feet	Key Note Segment		5 ft	63			
36930	16.4 to 39.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	115	SF	$40	**$4,600**
36923	17.2 to 18.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36924	35.4 to 36.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
36931	54.1 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
36932	70.0 to 95.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
36933	108.1 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
36925	125.2 to 126.2 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
36934	126.7 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
36935	147.7 to 185.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	190	SF	$120	**$22,800**
36936	189.3 to 202.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
36937	204.3 to 208.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
36940	208.9 to 228.0 feet	Key Note Segment		5 ft	96			
36938	228.8 to 286.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	290	SF	$120	**$34,800**
36927	244.7 to 245.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
36928	288.7 to 289.7 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **FOURTH ST** **$116,230.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171625	S I ST	NINTH ST	EIGHTH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36310	0.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
36323	6.0 to 30.0 feet	Key Note Segment		5 ft	120			
36311	30.0 to 40.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
36312	50.8 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
36324	53.6 to 77.3 feet	Key Note Segment		5 ft	119			
36313	77.3 to 79.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
36314	79.5 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
36301	89.0 to 90.0 feet	**Vertical Change**	-1.05"	5 ft	5	SF	$75	**$375**
36315	92.3 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
36325	96.4 to 103.7 feet	Key Note Segment		5 ft	37			
36302	105.7 to 106.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
36316	132.3 to 146.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
36326	146.9 to 155.0 feet	Key Note Segment		5 ft	41			
36303	161.8 to 162.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
36327	193.5 to 201.9 feet	Key Note Segment		5 ft	42			
36317	219.0 to 229.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
36304	230.5 to 231.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
36305	235.1 to 236.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
36328	237.1 to 246.5 feet	Key Note Segment		5 ft	47			
36318	246.5 to 249.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$620**
36319	249.9 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
36306	275.1 to 278.9 feet	**Vertical Change**	.34"	5 ft	19	LF	$75	**$1,425**
36320	277.6 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
36321	282.2 to 289.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
36307	290.7 to 291.7 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
36308	299.3 to 300.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
36329	301.3 to 308.8 feet	Key Note Segment		5 ft	38			
36322	308.8 to 319.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	54	SF	$40	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171625	S I ST	NINTH ST	EIGHTH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36309	340.1 to 341.1 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NE *side of* **S I ST** *Starting at:* **NINTH ST** **$42,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171710	S I ST	NINTH ST	OLIVE AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36573	1.9 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
36561	5.0 to 6.0 feet	**Vertical Change**	.3"	6 ft	6	REF		
36623	9.6 to 43.8 feet	Key Note Segment		6 ft	205			
36562	25.3 to 26.3 feet	**Vertical Change**	.26"	6 ft	6	REF		
36574	44.4 to 45.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	7	SF	$40	**$288**
36575	47.8 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	69	SF	$120	**$8,280**
36576	59.6 to 71.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	68	SF	$120	**$8,208**
36577	71.0 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	179	SF	$120	**$21,456**
36563	83.2 to 84.2 feet	**Vertical Change**	-.27"	6 ft	6	REF		
36578	101.6 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,688**
36579	109.5 to 118.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	55	SF	$120	**$6,552**
36580	119.5 to 136.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	104	SF	$120	**$12,528**
36581	139.0 to 153.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	89	SF	$120	**$10,728**
36582	153.9 to 158.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	**$3,600**
36583	163.9 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	206	SF	$120	**$24,768**
36584	198.6 to 208.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	60	SF	$120	**$7,200**
36585	211.4 to 216.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
36586	216.9 to 235.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	112	SF	$120	**$13,392**
36624	235.5 to 268.3 feet	Key Note Segment		6 ft	197			
36587	269.1 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	74	SF	$120	**$8,856**
36564	280.3 to 281.3 feet	**Vertical Change**	.33"	6 ft	6	REF		
36588	281.4 to 293.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	71	SF	$120	**$8,496**
36625	294.0 to 313.2 feet	Key Note Segment		6 ft	115			
36589	313.2 to 315.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	15	SF	$40	**$600**
36590	319.7 to 321.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
36591	326.9 to 328.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
36592	340.3 to 344.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$3,024**
36593	347.0 to 353.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	37	SF	$120	**$4,392**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171710	S I ST	NINTH ST	OLIVE AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36594	355.5 to 362.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	44	SF	$120	**$5,256**
36595	364.9 to 379.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	86	SF	$120	**$10,296**
36626	379.7 to 413.3 feet	Key Note Segment		6 ft	202			
36596	414.0 to 429.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	92	SF	$120	**$11,088**
36597	429.8 to 447.2 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	104	SF	$120	**$12,528**
36598	447.7 to 450.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	19	SF	$120	**$2,232**
36599	452.4 to 475.5 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	139	SF	$120	**$16,632**
36600	475.7 to 483.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	49	SF	$120	**$5,832**
36566	476.4 to 477.4 feet	**Vertical Change**	.26"	6 ft	6	REF		
36567	480.0 to 481.0 feet	**Vertical Change**	1.44"	6 ft	6	REF		
36601	487.7 to 492.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	26	SF	$120	**$3,096**
36568	493.5 to 494.5 feet	**Vertical Change**	.33"	6 ft	6	LF	$75	**$450**
36602	495.1 to 497.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	**$2,016**
36603	497.9 to 507.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	59	SF	$120	**$7,128**
36604	507.8 to 520.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	74	SF	$120	**$8,856**
36605	520.1 to 523.2 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	19	SF	$120	**$2,232**
36569	521.0 to 522.0 feet	**Vertical Change**	.75"	6 ft	6	REF		
36627	523.3 to 557.5 feet	Key Note Segment		6 ft	205			
36606	558.3 to 562.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	6 ft	27	SF	$40	**$1,080**
36607	562.8 to 564.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	13	SF	$120	**$1,512**
36608	564.9 to 566.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
36609	568.3 to 575.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	41	SF	$120	**$4,968**
36610	575.4 to 584.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,336**
36611	587.1 to 588.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
36612	590.3 to 592.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	14	SF	$120	**$1,728**
36613	595.6 to 610.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	89	SF	$120	**$10,656**
36570	607.0 to 608.0 feet	**Vertical Change**	.41"	6 ft	6	REF		
36614	612.7 to 626.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	82	SF	$120	**$9,792**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171710	S I ST	NINTH ST	OLIVE AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36615	628.7 to 632.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	25	SF	$120	**$3,024**
36616	635.2 to 639.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	23	SF	$120	**$2,808**
36617	640.0 to 645.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	35	SF	$120	**$4,176**
36628	645.8 to 678.7 feet	Key Note Segment		6 ft	197			
36618	679.2 to 691.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	76	SF	$40	**$3,024**
36619	691.8 to 698.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	42	SF	$120	**$5,040**
36620	699.3 to 716.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	106	SF	$120	**$12,672**
36629	716.9 to 749.1 feet	Key Note Segment		6 ft	193			
36571	717.0 to 718.0 feet	**Vertical Change**	.26"	6 ft	6	REF		
36621	754.3 to 780.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	155	SF	$120	**$18,576**
36622	781.3 to 803.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	135	SF	$120	**$16,200**
36572	801.8 to 802.8 feet	**Vertical Change**	.36"	6 ft	6	REF		

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **NINTH ST** **$350,682.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171635	S I ST	SEVENTH ST	SIXTH ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36361	0.0 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
36362	5.3 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
36363	33.4 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
36357	33.8 to 34.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
36372	65.3 to 73.3 feet	Key Note Segment		5 ft	40			
36364	87.4 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
36365	99.3 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
36358	140.8 to 141.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
36373	154.7 to 165.6 feet	Key Note Segment		5 ft	55			
36374	196.8 to 222.3 feet	Key Note Segment		5 ft	128			
36366	234.3 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
36359	236.2 to 237.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
36367	257.6 to 259.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
36368	259.7 to 263.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
36360	262.3 to 263.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
36369	263.8 to 275.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
36376	279.3 to 280.5 feet		9.0-10.0%	5 ft	6			
36370	283.3 to 302.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
36375	304.4 to 324.8 feet	Key Note Segment		5 ft	102			
36371	328.0 to 346.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**

TOTAL COST FOR: NE *side of* **S I ST** *Starting at:* **SEVENTH ST** **$69,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171657	S I ST	SEVENTH ST	EIGHTH ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36504	0.9 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
36505	7.4 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
36487	10.5 to 11.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
36506	14.3 to 34.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
36488	38.2 to 39.2 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
36507	41.4 to 47.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
36489	45.1 to 46.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
36508	49.1 to 52.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	16	SF	$120	**$1,860**
36509	57.5 to 60.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
36510	66.8 to 73.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
36511	73.5 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
36512	78.5 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
36513	83.8 to 85.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
36514	85.6 to 89.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
36515	90.1 to 96.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
36516	96.2 to 98.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
36517	101.3 to 113.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	63	SF	$120	**$7,560**
36518	116.3 to 117.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
36519	117.4 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
36490	122.1 to 123.1 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
36491	124.0 to 125.0 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
36492	125.7 to 126.7 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
36520	128.7 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
36521	136.1 to 137.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
36493	139.1 to 140.1 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
36522	143.8 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,260**
36494	149.6 to 150.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36495	153.3 to 154.3 feet	**Vertical Change**	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171657	S I ST	SEVENTH ST	EIGHTH ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36496	165.9 to 166.9 feet	Vertical Change	.3"	5 ft	5	REF		
36497	167.8 to 168.8 feet	Vertical Change	1.3"	5 ft	5	REF		
36523	168.5 to 169.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
36498	170.1 to 171.1 feet	Vertical Change	-.33"	5 ft	5	LF	$75	**$375**
36524	172.3 to 178.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
36525	179.1 to 187.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
36526	190.3 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
36527	197.8 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
36500	201.3 to 202.3 feet	Vertical Change	.27"	5 ft	5	REF		
36501	205.1 to 206.1 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
36528	212.1 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
36535	213.9 to 215.1 feet		7.0-8.0%	5 ft	6			
36502	233.5 to 234.5 feet	Vertical Change	.5"	5 ft	5	REF		
36533	244.0 to 253.0 feet	Key Note Segment		5 ft	45			
36503	245.3 to 246.3 feet	Vertical Change	.73"	5 ft	5	REF		
36529	254.3 to 259.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
36534	259.9 to 275.7 feet	Key Note Segment		5 ft	79			
36530	276.9 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
36531	284.4 to 301.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
36532	307.4 to 311.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **SEVENTH ST** **$118,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171641	S I ST	SIXTH ST	W YOSEMITE AVE	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36395	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
36396	1.7 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
36397	8.4 to 11.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
36398	13.3 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
36377	20.3 to 21.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
36399	24.1 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
36400	26.6 to 43.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
36378	32.2 to 33.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
36379	44.9 to 45.9 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
36401	48.9 to 50.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**
36381	53.9 to 54.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
36402	54.5 to 57.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
36403	59.1 to 60.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
36422	105.8 to 115.2 feet	Key Note Segment		5 ft	47			
36404	117.3 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
36382	119.7 to 120.7 feet	**Vertical Change**	-2.15"	5 ft	5	SF	$75	**$375**
36405	121.3 to 125.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
36383	124.9 to 125.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
36384	129.1 to 130.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
36406	129.3 to 132.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
36385	135.8 to 136.8 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
36386	138.8 to 139.8 feet	**Vertical Change**	1.01"	5 ft	5	REF		
36407	139.0 to 143.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
36387	140.5 to 141.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
36408	143.1 to 145.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
36388	143.4 to 144.4 feet	**Vertical Change**	2.44"	5 ft	5	REF		
36409	145.8 to 146.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
36410	146.9 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105171641	S I ST	SIXTH ST	W YOSEMITE AVE	119

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36411	156.8 to 157.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
36390	159.2 to 160.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
36412	159.3 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
36413	165.8 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
36391	171.8 to 172.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
36414	177.3 to 184.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
36415	187.2 to 189.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
36423	189.7 to 207.0 feet	Key Note Segment		5 ft	87			
36392	190.8 to 191.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
36393	204.1 to 205.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36416	207.1 to 221.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	71	SF	$40	**$2,840**
36417	221.4 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
36418	228.5 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
36394	237.1 to 238.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36419	247.1 to 255.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
36420	255.4 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
36421	270.1 to 275.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
36424	276.6 to 294.8 feet	Key Note Segment		5 ft	91			

TOTAL COST FOR: NE *side of* **S I ST** *Starting at:* **SIXTH ST** **$74,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171652	S I ST	SIXTH ST	SEVENTH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36462	0.0 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
36453	1.0 to 2.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
36463	17.7 to 20.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
36464	28.6 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
36465	43.3 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
36454	59.4 to 60.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
36466	66.3 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
36455	83.1 to 84.1 feet	**Vertical Change**	.66"	5 ft	5	REF		
36467	88.7 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
36468	97.9 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
36456	110.1 to 111.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
36469	110.3 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
36470	122.1 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
36471	130.3 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
36472	143.5 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
36457	174.7 to 175.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
36473	178.0 to 184.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
36483	195.3 to 204.1 feet	Key Note Segment		5 ft	44			
36458	201.0 to 202.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
36459	203.9 to 204.9 feet	**Vertical Change**	1.24"	5 ft	5	REF		
36474	207.8 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
36484	210.8 to 218.6 feet	Key Note Segment		5 ft	39			
36475	219.0 to 236.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	89	SF	$40	**$3,560**
36460	219.2 to 220.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36476	241.7 to 250.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
36477	250.7 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
36478	257.5 to 270.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
36479	276.3 to 280.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171652	S I ST	SIXTH ST	SEVENTH ST	97

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36461	278.6 to 279.6 feet	Vertical Change	-.37"	5 ft	5	REF		
36480	280.8 to 282.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
36485	281.7 to 282.8 feet		9.0-10.0%	5 ft	6			
36481	295.7 to 298.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
36482	305.1 to 307.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
36486	341.4 to 342.6 feet		7.0-8.0%	5 ft	6			

TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **SIXTH ST** **$93,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171647	S I ST	W YOSEMITE AVE	SIXTH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36425	3.2 to 4.2 feet	Vertical Change	-.44"	5 ft	5	LF	$75	$375
36433	14.6 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
36434	29.6 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	$18,000
36426	41.0 to 42.0 feet	Vertical Change	-.51"	5 ft	5	REF		
36435	59.8 to 63.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,220
36450	64.3 to 84.1 feet	Key Note Segment		5 ft	99			
36436	84.1 to 88.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	$820
36437	88.2 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
36438	98.1 to 100.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
36427	120.2 to 121.2 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
36451	133.1 to 141.5 feet	Key Note Segment		5 ft	42			
36428	136.1 to 137.1 feet	Vertical Change	.63"	5 ft	5	REF		
36439	141.9 to 145.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	$680
36440	153.3 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
36441	167.2 to 188.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	$12,600
36429	179.4 to 180.4 feet	Vertical Change	-.28"	5 ft	5	REF		
36430	189.0 to 190.0 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
36442	196.6 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
36443	204.6 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
36444	208.9 to 213.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
36431	210.4 to 211.4 feet	Vertical Change	.27"	5 ft	5	REF		
36445	217.4 to 227.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
36452	227.9 to 248.5 feet	Key Note Segment		5 ft	103			
36432	235.6 to 236.6 feet	Vertical Change	-.27"	5 ft	5	REF		
36446	248.7 to 254.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
36447	257.6 to 266.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,280
36448	266.4 to 268.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
36449	271.5 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	$18,840

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105171647	S I ST	W YOSEMITE AVE	SIXTH ST	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: SW *side of* **S I ST** *Starting at:* **W YOSEMITE AVE**								**$90,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101242	S LAKE ST	11TH ST	12TH ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50710	0.1 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
50711	4.4 to 7.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
50712	7.8 to 11.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
50713	14.8 to 16.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
50714	16.2 to 17.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
50733	19.0 to 31.3 feet	Key Note Segment		5 ft	62			
50715	31.3 to 36.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
50734	37.8 to 50.5 feet	Key Note Segment		5 ft	64			
50716	50.5 to 54.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$780**
50717	56.0 to 60.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
50718	64.1 to 65.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50719	67.8 to 97.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,520**
50720	101.0 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
50735	103.2 to 117.2 feet	Key Note Segment		5 ft	70			
50708	108.1 to 109.1 feet	**Vertical Change**	1.71"	5 ft	5	REF		
50721	119.5 to 124.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
50722	124.4 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
50723	133.6 to 135.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
50724	136.3 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
50725	163.7 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
50736	167.4 to 179.8 feet	Key Note Segment		5 ft	62			
50726	184.2 to 200.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
50727	207.8 to 214.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
50728	217.3 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
50729	233.4 to 244.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
50737	244.9 to 259.5 feet	Key Note Segment		5 ft	73			
50730	261.3 to 268.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
50731	270.6 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	206	SF	$120	**$24,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101242	S LAKE ST	11TH ST	12TH ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50732	312.1 to 336.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
50709	324.6 to 325.6 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **11TH ST** **$128,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101213	S LAKE ST	6TH ST	E YOSEMITE AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56199	11.9 to 12.9 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375
56213	41.1 to 51.9 feet	Key Note Segment		5 ft	54			
56200	51.2 to 52.2 feet	Vertical Change	.3"	5 ft	5	REF		
56202	51.9 to 54.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	14	SF	$40	$540
56203	55.0 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
56204	60.6 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
56205	68.3 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
56214	88.0 to 98.3 feet	Key Note Segment		5 ft	52			
56201	89.3 to 90.3 feet	Vertical Change	.37"	5 ft	5	REF		
56206	101.3 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
56207	110.3 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
56208	118.8 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
56209	161.3 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,100
56210	167.6 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
56215	176.9 to 187.6 feet	Key Note Segment		5 ft	54			
56216	199.6 to 217.9 feet	Key Note Segment		5 ft	92			
56217	235.6 to 253.1 feet	Key Note Segment		5 ft	88			
56211	254.5 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
56212	262.8 to 282.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	$12,060

TOTAL COST FOR: NE *side of* **S LAKE ST** *Starting at:* **6TH ST** **$42,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101029	S LAKE ST	6TH ST	CLINTON ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55468	0.0 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
55448	12.0 to 13.0 feet	**Vertical Change**	-.46"	5 ft	5	REF		
55469	17.7 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
55470	30.7 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
55514	37.5 to 45.0 feet	Key Note Segment		5 ft	38			
55449	37.9 to 38.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
55471	45.0 to 65.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	100	SF	$40	**$4,000**
55472	67.1 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
55515	80.8 to 91.9 feet	Key Note Segment		5 ft	56			
55473	93.4 to 114.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
55474	115.2 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
55475	136.1 to 152.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
55516	152.6 to 163.0 feet	Key Note Segment		5 ft	52			
55517	165.8 to 176.2 feet	Key Note Segment		5 ft	52			
55476	176.2 to 186.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	53	SF	$40	**$2,120**
55477	187.5 to 188.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
55478	193.1 to 195.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
55479	197.3 to 201.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
55480	201.7 to 205.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
55481	205.7 to 210.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
55526	209.7 to 212.1 feet		6.0-7.0%	5 ft	12			
55527	209.7 to 212.1 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
55482	213.8 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
55450	214.1 to 215.1 feet	**Vertical Change**	.6"	5 ft	5	REF		
55451	219.8 to 220.8 feet	**Vertical Change**	1.27"	5 ft	5	SF	$75	**$375**
55452	234.2 to 237.9 feet	**Vertical Change**	.28"	5 ft	19	LF	$75	**$1,388**
55518	253.5 to 268.2 feet	Key Note Segment		5 ft	74			
55453	260.8 to 261.8 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101029	S LAKE ST	6TH ST	CLINTON ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55483	277.6 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
55484	288.4 to 291.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
55485	293.9 to 298.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
55486	318.3 to 326.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,860**
55454	335.0 to 336.0 feet	**Vertical Change**	.81"	5 ft	5	SF	$75	**$375**
55487	342.8 to 343.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
55488	345.1 to 353.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
55489	354.4 to 360.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
55490	372.1 to 376.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
55491	388.4 to 391.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
55492	395.8 to 427.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
55455	427.6 to 428.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
55493	427.8 to 439.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
55456	437.9 to 438.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
55519	440.1 to 447.4 feet	Key Note Segment		5 ft	37			
55494	447.4 to 471.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	122	SF	$40	**$4,880**
55457	482.5 to 485.3 feet	**Vertical Change**	.55"	5 ft	14	SF	$75	**$1,050**
55520	484.3 to 492.0 feet	Key Note Segment		5 ft	39			
55521	497.4 to 511.9 feet	Key Note Segment		5 ft	73			
55495	513.8 to 528.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
55496	530.2 to 549.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,580**
55458	535.0 to 536.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
55497	549.5 to 551.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
55498	554.8 to 556.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
55459	555.2 to 556.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
55522	557.2 to 564.9 feet	Key Note Segment		5 ft	38			
55460	565.2 to 566.2 feet	**Vertical Change**	-.39"	5 ft	5	REF		
55499	565.5 to 591.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101029	S LAKE ST	6TH ST	CLINTON ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55461	577.7 to 578.7 feet	Vertical Change	-.3"	5 ft	5	REF		
55462	591.1 to 592.1 feet	Vertical Change	.41"	5 ft	5	REF		
55500	596.2 to 602.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
55463	602.2 to 603.2 feet	Vertical Change	.47"	5 ft	5	REF		
55464	612.2 to 613.2 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
55501	616.7 to 618.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
55502	627.1 to 628.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
55523	634.3 to 640.4 feet	Key Note Segment		5 ft	31			
55503	641.0 to 644.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
55466	655.3 to 656.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
55504	659.2 to 664.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	26	SF	$120	**$3,060**
55467	663.0 to 664.0 feet	Vertical Change	-.43"	5 ft	5	REF		
55505	664.4 to 665.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
55506	667.0 to 670.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
55528	671.1 to 672.4 feet		7.0-8.0%	5 ft	7			
55507	675.3 to 677.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
55524	677.4 to 683.4 feet	Key Note Segment		5 ft	30			
55508	683.4 to 695.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	60	SF	$40	**$2,380**
55509	695.3 to 699.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
55525	700.2 to 709.6 feet	Key Note Segment		5 ft	47			
55510	709.6 to 713.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	19	SF	$40	**$740**
55511	713.3 to 717.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
55512	718.3 to 731.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
55513	731.2 to 743.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **6TH ST** **$210,777.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106101236	S LAKE ST	701 S LAKE ST	ROOSEVELT AVE	108

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50681	0.0 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
50678	1.8 to 2.8 feet	**Vertical Change**	1.23"	5 ft	5	REF		
50695	8.1 to 22.6 feet	Key Note Segment		5 ft	73			
50682	25.8 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
50683	32.0 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
50684	37.3 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
50696	38.5 to 52.3 feet	Key Note Segment		5 ft	69			
50685	52.3 to 68.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	80	SF	$40	**$3,200**
50679	58.5 to 59.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
50686	68.4 to 82.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	**$8,400**
50687	82.4 to 84.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
50688	84.3 to 113.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	145	SF	$120	**$17,340**
50680	93.4 to 94.4 feet	**Vertical Change**	.48"	5 ft	5	REF		
50689	113.2 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
50690	115.9 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
50691	125.4 to 130.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
50692	132.7 to 146.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
50693	146.9 to 162.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	79	SF	$120	**$9,480**
50694	164.0 to 165.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: E *side of* **S LAKE ST** *Starting at:* **701 S LAKE ST** **$66,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101210	S LAKE ST	7TH ST	6TH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56179	1.2 to 13.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
56180	18.8 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
56181	26.6 to 28.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
56182	36.0 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56170	37.3 to 38.3 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
56171	43.0 to 44.0 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
56183	62.4 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
56184	70.2 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
56185	81.5 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56186	88.5 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
56173	92.7 to 93.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56195	98.9 to 113.1 feet	Key Note Segment		5 ft	71			
56187	113.4 to 117.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
56188	123.7 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56196	129.1 to 138.3 feet	Key Note Segment		5 ft	46			
56189	138.3 to 231.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	467	SF	$40	**$18,700**
56174	190.0 to 191.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
56197	190.9 to 196.5 feet	Key Note Segment		5 ft	28			
56175	224.7 to 225.7 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
56198	235.4 to 247.8 feet	Key Note Segment		5 ft	62			
56176	238.8 to 239.8 feet	**Vertical Change**	2.2"	5 ft	5	REF		
56190	247.8 to 249.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
56177	257.7 to 258.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
56191	262.3 to 266.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
56178	268.0 to 271.2 feet	**Vertical Change**	.5"	5 ft	16	SF	$75	**$1,200**
56192	281.3 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
56193	301.8 to 306.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
56194	309.1 to 310.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101210	S LAKE ST	7TH ST	6TH ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: NE	*side of* **S LAKE ST**	*Starting at:* **7TH ST**						**$68,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101156	S LAKE ST	9TH ST	CLINTON ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56101	0.9 to 17.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
56102	18.5 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
56103	26.9 to 44.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
56104	46.9 to 50.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
56105	51.6 to 62.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
56106	62.3 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
56117	67.3 to 91.9 feet	Key Note Segment		5 ft	123			
56107	93.3 to 95.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
56108	95.3 to 120.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
56094	103.6 to 104.6 feet	**Vertical Change**	3.08"	5 ft	5	REF		
56118	120.6 to 147.5 feet	Key Note Segment		5 ft	135			
56095	140.8 to 141.8 feet	**Vertical Change**	.93"	5 ft	5	REF		
56109	147.5 to 148.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
56096	150.9 to 151.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
56110	163.0 to 164.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56111	168.6 to 170.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
56112	176.3 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
56097	184.4 to 185.4 feet	**Vertical Change**	2.68"	5 ft	5	SF	$75	**$375**
56098	195.6 to 196.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
56113	213.1 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
56119	220.4 to 250.5 feet	Key Note Segment		5 ft	151			
56114	251.1 to 255.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
56115	256.1 to 259.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
56120	259.7 to 282.7 feet	Key Note Segment		5 ft	115			
56099	280.3 to 281.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
56100	304.6 to 305.6 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
56116	313.4 to 317.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: NE *side of* **S LAKE ST** *Starting at:* **9TH ST** **$63,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101206	S LAKE ST	CLINTON ST	SYCAMORE AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56146	1.3 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
56147	12.0 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
56148	23.8 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
56149	35.1 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
56150	41.5 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
56167	65.3 to 74.3 feet	Key Note Segment		5 ft	45			
56151	76.0 to 93.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
56152	114.9 to 154.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$24,000**
56153	157.4 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
56154	181.1 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
56168	188.6 to 198.9 feet	Key Note Segment		5 ft	52			
56142	191.9 to 192.9 feet	**Vertical Change**	-.4"	5 ft	5	REF		
56155	199.3 to 201.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
56156	205.7 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
56157	220.8 to 226.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
56158	226.4 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
56159	256.1 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
56144	259.1 to 260.1 feet	**Vertical Change**	-.95"	5 ft	5	SF	$75	**$375**
56160	278.5 to 280.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
56161	281.2 to 282.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
56145	283.3 to 284.3 feet	**Vertical Change**	-1.62"	5 ft	5	SF	$75	**$375**
56162	284.5 to 286.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	9	SF	$120	**$1,020**
56169	286.0 to 287.1 feet		5.0-6.0%	5 ft	6			
56163	287.9 to 289.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
56164	292.6 to 317.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,940**
56165	321.8 to 322.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
56166	327.4 to 332.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: NE *side of* **S LAKE ST** *Starting at:* **CLINTON ST** **$105,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101128	S LAKE ST	CLINTON ST	MOORE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55919	0.9 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
55903	7.5 to 8.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
55920	14.9 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
55904	38.5 to 39.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
55921	38.8 to 44.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
55905	52.8 to 53.8 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
55922	56.4 to 57.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55952	57.6 to 79.6 feet	Key Note Segment		5 ft	110			
55923	79.6 to 86.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	35	SF	$40	**$1,380**
55906	87.2 to 88.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
55924	95.2 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
55907	95.8 to 96.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
55953	102.8 to 136.9 feet	Key Note Segment		5 ft	171			
55925	138.0 to 144.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
55926	144.5 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
55908	149.5 to 150.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
55954	161.2 to 183.8 feet	Key Note Segment		5 ft	113			
55910	161.8 to 162.8 feet	**Vertical Change**	-.51"	5 ft	5	REF		
55911	180.9 to 181.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
55927	183.8 to 189.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,060**
55928	196.8 to 202.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
55955	204.0 to 223.6 feet	Key Note Segment		5 ft	98			
55929	223.6 to 226.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	16	SF	$40	**$640**
55930	228.7 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
55912	245.8 to 246.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
55956	247.3 to 266.7 feet	Key Note Segment		5 ft	97			
55931	277.2 to 280.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
55957	290.4 to 314.8 feet	Key Note Segment		5 ft	122			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101128	S LAKE ST	CLINTON ST	MOORE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55932	314.8 to 324.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	47	SF	$40	$1,880
55933	324.2 to 344.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	101	SF	$120	$12,060
55958	345.1 to 380.2 feet	Key Note Segment		5 ft	176			
55913	378.5 to 379.5 feet	Vertical Change	-.28"	5 ft	5	REF		
55934	381.9 to 387.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
55935	387.5 to 396.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
55936	396.8 to 402.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
55959	402.7 to 437.0 feet	Key Note Segment		5 ft	172			
55937	437.1 to 451.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	71	SF	$40	$2,840
55914	450.1 to 451.1 feet	Vertical Change	-.31"	5 ft	5	REF		
55938	451.8 to 473.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	$13,140
55939	492.5 to 511.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	$11,580
55915	493.1 to 494.1 feet	Vertical Change	.3"	5 ft	5	REF		
55940	512.5 to 523.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	$6,840
55941	523.9 to 525.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
55942	528.2 to 542.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,400
55943	544.3 to 552.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
55944	553.7 to 560.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
55960	561.5 to 586.3 feet	Key Note Segment		5 ft	124			
55916	574.6 to 575.6 feet	Vertical Change	.76"	5 ft	5	REF		
55945	586.3 to 588.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	12	SF	$40	$480
55917	591.1 to 592.1 feet	Vertical Change	-.51"	5 ft	5	REF		
55946	591.3 to 597.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,540
55947	611.3 to 622.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
55948	627.3 to 649.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	$13,500
55949	654.8 to 658.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
55950	660.6 to 682.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,840
55918	661.6 to 662.6 feet	Vertical Change	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101128	S LAKE ST	CLINTON ST	MOORE AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55951	682.0 to 687.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **CLINTON ST** **$172,965.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101022	S LAKE ST	E YOSEMITE AVE	6TH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55428	0.6 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
55429	5.2 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
55430	22.1 to 37.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,120
55431	37.3 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
55432	46.8 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
55433	53.0 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,280
55445	72.2 to 98.7 feet	Key Note Segment		5 ft	133			
55425	102.9 to 103.9 feet	Vertical Change	.29"	5 ft	5	REF		
55434	103.8 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
55446	122.7 to 131.9 feet	Key Note Segment		5 ft	46			
55435	136.0 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
55436	147.7 to 152.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
55437	152.6 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
55438	158.2 to 159.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
55439	167.4 to 180.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	$7,980
55440	189.6 to 201.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
55441	208.3 to 218.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
55447	218.8 to 227.1 feet	Key Note Segment		5 ft	42			
55427	221.2 to 222.2 feet	Vertical Change	.31"	5 ft	5	REF		
55442	227.1 to 241.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	72	SF	$40	$2,880
55443	241.8 to 262.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,360
55444	265.2 to 286.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,480

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **E YOSEMITE AVE** **$100,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111111	S LAKE ST	HULL AVE	WALLACE AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58582	0.4 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
58583	6.7 to 14.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
58584	17.1 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,400**
58585	49.7 to 76.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	136	SF	$120	**$16,260**
58577	65.5 to 66.5 feet	**Vertical Change**	.63"	5 ft	5	REF		
58586	79.0 to 81.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
58587	83.5 to 91.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
58595	91.5 to 104.9 feet	Key Note Segment		5 ft	67			
58578	92.6 to 93.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
58579	105.1 to 106.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
58588	106.0 to 115.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
58596	115.4 to 127.1 feet	Key Note Segment		5 ft	59			
58589	127.2 to 129.8 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	13	SF	$40	**$520**
58580	127.8 to 128.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
58590	129.9 to 134.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
58591	136.9 to 175.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	192	SF	$120	**$23,040**
58581	170.4 to 171.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
58592	175.3 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
58593	184.8 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
58597	208.1 to 221.3 feet	Key Note Segment		5 ft	66			
58594	221.3 to 222.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**

TOTAL COST FOR: N *side of* **S LAKE ST** *Starting at:* **HULL AVE** **$92,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101147	S LAKE ST	MOORE AVE	9TH ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56051	8.0 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
56052	21.3 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
56053	33.3 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
56042	37.7 to 38.7 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
56054	41.9 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
56043	47.6 to 48.6 feet	**Vertical Change**	1.09"	5 ft	5	REF		
56044	52.0 to 53.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
56055	66.2 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56045	74.6 to 75.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
56068	76.5 to 120.3 feet	Key Note Segment		5 ft	219			
56046	84.0 to 85.0 feet	**Vertical Change**	1.36"	5 ft	5	REF		
56047	118.5 to 119.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
56056	131.2 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
56057	148.5 to 149.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
56058	150.3 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
56059	154.5 to 155.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
56060	156.1 to 158.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
56061	163.8 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,900**
56048	177.6 to 178.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
56062	178.8 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
56049	190.3 to 191.3 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
56050	193.6 to 194.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
56063	201.2 to 204.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
56069	205.7 to 227.6 feet	Key Note Segment		5 ft	110			
56064	227.6 to 229.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
56065	234.3 to 241.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
56070	242.7 to 265.6 feet	Key Note Segment		5 ft	115			
56066	265.7 to 267.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101147	S LAKE ST	MOORE AVE	9TH ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56067	284.9 to 287.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: NE *side of* **S LAKE ST** *Starting at:* **MOORE AVE** **$59,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101131	S LAKE ST	MOORE AVE	SUNRISE AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55963	0.3 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
55964	28.8 to 38.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,700**
55965	38.3 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
55966	43.5 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
55967	55.3 to 67.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
55977	67.0 to 94.8 feet	Key Note Segment		5 ft	139			
55968	95.4 to 100.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$980**
55969	103.9 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
55970	128.7 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
55978	129.9 to 153.7 feet	Key Note Segment		5 ft	119			
55971	155.2 to 165.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
55961	164.4 to 165.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
55972	165.5 to 167.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
55973	170.3 to 192.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
55979	192.9 to 216.8 feet	Key Note Segment		5 ft	120			
55974	219.4 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
55962	237.2 to 238.2 feet	**Vertical Change**	.56"	5 ft	5	REF		
55975	247.3 to 254.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
55976	255.7 to 265.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **MOORE AVE** **$92,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106101239	S LAKE ST	ROOSEVELT AVE	11TH ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50698	0.0 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	179	SF	$120	**$21,420**
50706	35.7 to 48.4 feet	Key Note Segment		5 ft	63			
50699	51.5 to 77.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
50700	80.5 to 86.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
50707	86.7 to 101.1 feet	Key Note Segment		5 ft	72			
50701	101.3 to 123.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	110	SF	$40	**$4,400**
50702	124.3 to 127.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
50697	127.4 to 128.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
50703	131.3 to 133.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
50704	135.3 to 140.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
50705	140.9 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: SW *side of* **S LAKE ST** *Starting at:* **ROOSEVELT AVE** **$52,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101135	S LAKE ST	SUNRISE AVE	MOORE AVE	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55984	0.0 to 16.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
55985	16.4 to 25.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
55980	16.7 to 17.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
55986	25.7 to 33.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	39	SF	$120	**$4,620**
55987	33.8 to 47.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,160**
55981	47.3 to 48.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
55988	47.4 to 48.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
55989	48.8 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
55990	54.8 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
55991	70.5 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
55992	84.3 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
55993	91.2 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
56007	98.9 to 123.3 feet	Key Note Segment		5 ft	122			
55994	126.7 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56008	128.5 to 152.8 feet	Key Note Segment		5 ft	122			
55982	128.9 to 129.9 feet	**Vertical Change**	-.31"	5 ft	5	REF		
55995	153.8 to 155.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
55996	157.5 to 166.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
55997	170.3 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
55998	182.9 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
55983	187.3 to 188.3 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
55999	206.3 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
56000	220.6 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
56001	253.3 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
56002	275.3 to 281.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
56003	284.9 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
56004	303.3 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
56005	311.9 to 312.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101135	S LAKE ST	SUNRISE AVE	MOORE AVE	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56006	321.0 to 325.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: NE *side of* **S LAKE ST** *Starting at:* **SUNRISE AVE** **$110,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108111122	S LAKE ST	WALLACE AVE	ROOSEVELT AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58707	0.1 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
58708	2.5 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
58709	17.9 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
58710	29.8 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
58711	57.3 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
58712	67.8 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
58713	87.1 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
58714	104.7 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
58701	111.0 to 112.0 feet	**Vertical Change**	.63"	5 ft	5	REF		
58715	113.8 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
58702	116.8 to 117.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
58716	125.6 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
58703	127.6 to 128.6 feet	**Vertical Change**	-.43"	5 ft	5	REF		
58704	142.0 to 143.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
58705	144.4 to 145.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
58717	148.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
58718	183.6 to 203.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
58719	207.7 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
58720	215.9 to 218.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
58721	218.9 to 222.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
58706	220.0 to 221.0 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **S LAKE ST** *Starting at:* **WALLACE AVE** **$93,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111151	S LAKE ST	WALLACE AVE	HULL AVE	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58920	0.0 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	17	SF	$120	**$2,064**
58921	4.3 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	109	SF	$120	**$13,056**
58914	13.3 to 14.3 feet	**Vertical Change**	1.74"	4 ft	4	REF		
58922	42.5 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
58938	52.4 to 69.0 feet	Key Note Segment		4 ft	66			
58915	55.6 to 56.6 feet	**Vertical Change**	.37"	4 ft	4	REF		
58923	70.8 to 80.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
58924	80.8 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	59	SF	$120	**$7,104**
58925	98.8 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,432**
58926	112.2 to 114.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
58939	114.7 to 136.2 feet	Key Note Segment		4 ft	86			
58916	116.2 to 117.2 feet	**Vertical Change**	-.35"	4 ft	4	REF		
58917	135.2 to 136.2 feet	**Vertical Change**	-.32"	4 ft	4	REF		
58927	136.5 to 141.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	19	SF	$40	**$768**
58928	144.3 to 161.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	68	SF	$120	**$8,208**
58918	144.8 to 145.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
58929	161.8 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
58930	165.8 to 166.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
58931	169.2 to 171.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
58932	173.6 to 182.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
58933	183.1 to 211.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	112	SF	$120	**$13,392**
58934	211.3 to 212.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
58935	213.1 to 218.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	21	SF	$120	**$2,496**
58936	218.3 to 223.1 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	19	SF	$120	**$2,304**
58937	223.1 to 225.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	11	SF	$120	**$1,296**
58919	226.8 to 227.8 feet	**Vertical Change**	.27"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **S LAKE ST** *Starting at:* **WALLACE AVE** **$74,844.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2107140935	S O ST	208 S O ST	216 S O ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
52802	0.8 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
52803	15.0 to 19.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
52804	20.8 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
52798	30.2 to 31.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
52807	34.9 to 44.6 feet	Key Note Segment		5 ft	49			
52799	40.9 to 41.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
52805	46.8 to 87.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	202	SF	$120	**$24,180**
52800	73.7 to 74.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
52801	88.6 to 89.6 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
52808	88.8 to 96.8 feet	Key Note Segment		5 ft	40			
52806	96.8 to 106.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	50	SF	$40	**$1,980**

TOTAL COST FOR: SW *side of* **S O ST** *Starting at:* **208 S O ST** **$44,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151151	S PINE ST	13241 S PINE ST	INDEPENDENCE DRIVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82219	1.4 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
82213	2.1 to 3.1 feet	**Vertical Change**	-.69"	5 ft	5	REF		
82220	14.1 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82221	33.0 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
82214	35.2 to 36.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
82222	45.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82223	52.8 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
82215	55.1 to 56.1 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
82216	65.6 to 66.6 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
82224	68.5 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
82225	84.3 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
82226	89.8 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82227	93.3 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
82228	118.9 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
82217	122.6 to 123.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
82229	127.3 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82230	131.6 to 133.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82231	137.4 to 144.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
82232	148.8 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
82218	156.8 to 157.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
82233	177.9 to 180.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$580**
82234	185.3 to 187.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
82235	212.9 to 221.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,620**

TOTAL COST FOR: W *side of* **S PINE ST** *Starting at:* **13241 S PINE ST** **$31,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105191343	S Q ST	HOWARD RD	OLIVE AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39446	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
39447	3.6 to 6.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
39448	7.3 to 8.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
39449	8.9 to 26.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	**$10,740**
39450	27.4 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
39454	31.7 to 62.1 feet	Key Note Segment		5 ft	152			
39451	62.6 to 63.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
39452	63.7 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
39453	71.7 to 141.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	347	SF	$120	**$41,580**
39443	75.0 to 76.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
39444	113.1 to 114.1 feet	**Vertical Change**	-.44"	5 ft	5	REF		
39445	127.6 to 128.6 feet	**Vertical Change**	.39"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **S Q ST** *Starting at:* **HOWARD RD** **$64,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111403	S TIMBERLINE DR	3061 S TIMBERLINE DR	GAMAY AVE	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92335	0.0 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
92336	10.3 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
92337	15.0 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
92338	39.8 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92339	49.1 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
92334	49.4 to 50.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
92340	57.8 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
92341	66.2 to 67.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
92342	67.2 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: W *side of* **S TIMBERLINE DR** *Starting at:* **3061 S TIMBERLINE DR** **$26,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111521	S TIMBERLINE DR	CAPISTRANO DR	GAMAY AVE	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93020	0.0 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
93015	3.2 to 4.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
93030	17.5 to 36.1 feet	Key Note Segment		5 ft	93			
93021	38.0 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
93022	57.4 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93031	67.5 to 87.3 feet	Key Note Segment		5 ft	99			
93023	90.2 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
93032	94.4 to 113.7 feet	Key Note Segment		5 ft	97			
93024	115.6 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
93025	132.3 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**
93033	168.3 to 187.6 feet	Key Note Segment		5 ft	97			
93026	189.3 to 194.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
93016	193.1 to 194.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
93034	194.4 to 213.7 feet	Key Note Segment		5 ft	97			
93017	197.1 to 198.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
93027	221.7 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
93028	237.2 to 241.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93035	242.8 to 262.1 feet	Key Note Segment		5 ft	97			
93029	265.2 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
93018	266.0 to 267.0 feet	**Vertical Change**	1.35"	5 ft	5	REF		
93019	280.3 to 281.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **S TIMBERLINE DR** *Starting at:* **CAPISTRANO DR** **$60,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111510	S TIMBERLINE DR	CHIANTI AVE	MERLOT AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92989	0.3 to 31.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,960**
92984	3.3 to 4.3 feet	**Vertical Change**	2.09"	5 ft	5	REF		
92990	32.1 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
92991	51.8 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
92992	65.8 to 84.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
92993	85.2 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
92994	92.9 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
92985	93.5 to 94.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
92995	96.7 to 110.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
92996	112.1 to 143.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,020**
92987	119.9 to 120.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
92997	142.0 to 145.3 feet		5.0-6.0%	5 ft	17			
92998	142.0 to 145.3 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
92988	145.0 to 146.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **S TIMBERLINE DR** *Starting at:* **CHIANTI AVE** **$81,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111400	S TIMBERLINE DR	GAMAY AVE	3057 S TIMBERLINE DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92325	4.5 to 5.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
92329	5.3 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
92326	11.0 to 12.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92330	21.4 to 36.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
92331	40.8 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92327	45.9 to 46.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
92332	52.3 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
92328	54.7 to 55.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
92333	68.4 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**

TOTAL COST FOR: E *side of* **S TIMBERLINE DR** *Starting at:* **GAMAY AVE** **$23,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111525	S TIMBERLINE DR	GAMAY AVE	MERLOT AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93048	4.5 to 11.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
93073	18.3 to 37.8 feet	Key Note Segment		5 ft	97			
93036	27.9 to 28.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
93049	38.5 to 40.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	12	SF	$40	**$480**
93074	44.1 to 63.8 feet	Key Note Segment		5 ft	99			
93050	75.0 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
93037	89.2 to 90.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
93038	97.8 to 98.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
93051	97.8 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
93039	105.3 to 106.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
93075	107.0 to 124.8 feet	Key Note Segment		5 ft	89			
93052	128.3 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93076	131.8 to 151.3 feet	Key Note Segment		5 ft	98			
93053	151.8 to 155.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
93040	156.2 to 157.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
93054	162.1 to 165.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93055	176.2 to 182.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
93041	188.7 to 189.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
93056	190.9 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93077	197.5 to 216.1 feet	Key Note Segment		5 ft	93			
93057	217.4 to 222.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
93078	223.5 to 242.5 feet	Key Note Segment		5 ft	95			
93058	243.3 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
93059	252.1 to 256.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
93060	258.7 to 265.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
93061	268.3 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
93042	276.3 to 277.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
93079	285.0 to 303.0 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111525	S TIMBERLINE DR	GAMAY AVE	MERLOT AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93062	306.9 to 309.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93080	309.9 to 327.8 feet	Key Note Segment		5 ft	90			
93043	325.6 to 326.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
93063	329.1 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
93044	335.8 to 336.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
93064	348.0 to 355.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
93065	358.4 to 369.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
93081	371.1 to 389.4 feet	Key Note Segment		5 ft	92			
93066	391.5 to 396.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93082	396.4 to 415.8 feet	Key Note Segment		5 ft	97			
93067	421.1 to 427.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
93068	430.3 to 434.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
93069	436.2 to 438.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
93083	439.1 to 460.5 feet	Key Note Segment		5 ft	107			
93045	449.9 to 450.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93046	457.3 to 458.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
93070	460.5 to 466.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	29	SF	$40	**$1,140**
93071	467.5 to 482.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
93084	484.9 to 488.1 feet		6.0-7.0%	5 ft	16			
93072	485.4 to 488.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
93047	487.3 to 488.3 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **S TIMBERLINE DR** *Starting at:* **GAMAY AVE** **$88,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111512	S TIMBERLINE DR	MERLOT AVE	CAPISTRANO DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93001	0.0 to 4.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
93002	4.5 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93003	8.8 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,700**
93004	24.8 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
93005	30.7 to 31.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
92999	33.5 to 34.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
93006	34.1 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
93007	39.1 to 40.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
93008	41.3 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
93000	46.4 to 47.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
93009	71.4 to 81.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,940**
93010	81.4 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
93011	84.9 to 88.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
93012	89.4 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
93013	116.0 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
93014	135.0 to 144.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**

TOTAL COST FOR: E *side of* **S TIMBERLINE DR** *Starting at:* **MERLOT AVE** **$68,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111307	S TIMBERLINE DR	MERLOT AVE	CHIANTI AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91763	0.8 to 7.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
91764	8.8 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91753	9.0 to 10.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
91765	15.1 to 20.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
91766	20.4 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
91775	22.0 to 40.3 feet	Key Note Segment		5 ft	91			
91754	23.2 to 24.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
91755	30.7 to 31.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
91767	41.5 to 42.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
91776	48.4 to 67.9 feet	Key Note Segment		5 ft	98			
91756	48.8 to 49.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
91757	67.7 to 68.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
91768	69.3 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
91769	76.8 to 90.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
91778	82.9 to 84.1 feet		7.0-8.0%	5 ft	6			
91770	90.6 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
91771	98.2 to 108.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
91777	109.8 to 134.0 feet	Key Note Segment		5 ft	121			
91758	110.6 to 111.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
91772	136.3 to 137.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
91773	137.4 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
91759	140.9 to 141.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
91760	158.3 to 159.3 feet	**Vertical Change**	1.88"	5 ft	5	REF		
91774	158.8 to 170.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
91761	167.2 to 168.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
91779	174.0 to 176.9 feet		5.0-6.0%	5 ft	15			
91780	174.0 to 176.9 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
91762	176.8 to 177.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111307	S TIMBERLINE DR	MERLOT AVE	CHIANTI AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: W *side of* **S TIMBERLINE DR** *Starting at:* **MERLOT AVE**								**$42,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111324	S WOLFTRAP ST	321 WOLFTRAP ST	DESERT RANCH WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91997	0.0 to 19.6 feet	Key Note Segment		5 ft	98			
91960	21.6 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91947	31.9 to 32.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
91961	33.3 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
91962	44.8 to 48.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
91963	49.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91964	55.8 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91998	59.0 to 79.3 feet	Key Note Segment		5 ft	102			
91948	63.1 to 64.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
91949	69.9 to 70.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
91999	86.6 to 105.4 feet	Key Note Segment		5 ft	94			
91965	106.4 to 108.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
91966	108.3 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
91950	113.7 to 114.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
91967	117.4 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
91951	131.2 to 132.2 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
91968	134.2 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91969	143.2 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91970	147.9 to 149.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
91971	152.7 to 155.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
92000	157.1 to 175.7 feet	Key Note Segment		5 ft	93			
91972	177.0 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92001	184.0 to 202.0 feet	Key Note Segment		5 ft	90			
91973	206.8 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
91974	218.0 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
91975	223.3 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
91976	230.0 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
91977	240.3 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111324	S WOLFTRAP ST	321 WOLFTRAP ST	DESERT RANCH WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92002	243.0 to 261.9 feet	Key Note Segment		5 ft	94			
91952	252.9 to 253.9 feet	Vertical Change	.31"	5 ft	5	REF		
91978	263.0 to 268.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
91953	265.4 to 266.4 feet	Vertical Change	.28"	5 ft	5	REF		
92003	269.1 to 288.8 feet	Key Note Segment		5 ft	98			
91954	279.1 to 280.1 feet	Vertical Change	.3"	5 ft	5	REF		
91979	291.6 to 294.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
91980	298.3 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
91981	306.3 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
91982	313.4 to 316.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
91983	319.2 to 320.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
91984	321.7 to 324.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
91985	327.3 to 338.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,600
92004	340.8 to 359.6 feet	Key Note Segment		5 ft	94			
91986	364.1 to 365.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
92005	366.7 to 385.8 feet	Key Note Segment		5 ft	96			
91955	369.8 to 370.8 feet	Vertical Change	.36"	5 ft	5	REF		
91987	387.1 to 388.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
91988	399.4 to 402.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
91989	402.9 to 404.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
91990	406.6 to 415.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
91991	420.3 to 435.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,240
92006	435.8 to 456.1 feet	Key Note Segment		5 ft	102			
91956	440.5 to 441.5 feet	Vertical Change	.27"	5 ft	5	REF		
91957	447.2 to 448.2 feet	Vertical Change	.3"	5 ft	5	REF		
91992	456.7 to 460.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
92007	461.9 to 482.5 feet	Key Note Segment		5 ft	103			
91958	483.0 to 484.0 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111324	S WOLFTRAP ST	321 WOLFTRAP ST	DESERT RANCH WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91993	484.3 to 485.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
91994	488.9 to 490.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
91995	491.0 to 494.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
91959	491.8 to 492.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
91996	494.9 to 501.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: E *side of* **S WOLFTRAP ST** *Starting at:* **321 WOLFTRAP ST** **$84,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111443	S WOLFTRAP ST	CAPISTRANO DR	MERLOT AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92756	0.0 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
92751	1.9 to 2.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
92757	17.0 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
92752	46.6 to 47.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
92753	55.9 to 56.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
92758	62.3 to 72.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
92754	72.0 to 73.0 feet	**Vertical Change**	.47"	5 ft	5	REF		
92759	73.4 to 74.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
92760	75.2 to 78.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
92761	79.2 to 80.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
92762	82.9 to 85.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
92763	86.6 to 89.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
92764	89.3 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
92765	92.4 to 145.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	266	SF	$120	**$31,920**
92755	108.3 to 109.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
92766	143.3 to 145.6 feet		5.0-6.0%	5 ft	11			
92767	143.3 to 145.6 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,380**

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **CAPISTRANO DR** **$74,835.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111320	S WOLFTRAP ST	CHIANTI AVE	321 WOLFTRAP ST	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91938	0.1 to 18.3 feet	Key Note Segment		5 ft	91			
91916	19.1 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
91917	22.4 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91918	26.3 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
91908	28.7 to 29.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
91919	32.4 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
91920	38.6 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
91921	50.8 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
91909	54.5 to 55.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
91922	58.8 to 64.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
91939	66.1 to 92.7 feet	Key Note Segment		5 ft	133			
91910	79.4 to 80.4 feet	**Vertical Change**	.6"	5 ft	5	REF		
91923	95.5 to 101.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
91924	104.1 to 106.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
91925	106.2 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
91926	110.3 to 119.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
91911	113.1 to 114.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
91940	119.3 to 149.6 feet	Key Note Segment		5 ft	152			
91912	148.5 to 149.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
91927	149.6 to 153.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$700**
91928	160.4 to 175.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
91941	176.1 to 202.7 feet	Key Note Segment		5 ft	133			
91929	204.1 to 211.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
91942	211.3 to 230.9 feet	Key Note Segment		5 ft	98			
91930	232.3 to 233.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
91931	233.8 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
91913	240.8 to 241.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
91932	253.8 to 264.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111320	S WOLFTRAP ST	CHIANTI AVE	321 WOLFTRAP ST	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91933	266.0 to 279.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
91943	282.5 to 311.0 feet	Key Note Segment		5 ft	143			
91934	311.0 to 316.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	27	SF	$40	**$1,080**
91944	319.9 to 338.7 feet	Key Note Segment		5 ft	94			
91914	322.3 to 323.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
91935	343.7 to 345.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
91936	351.4 to 355.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
91937	365.0 to 382.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
91915	383.4 to 384.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
91945	383.9 to 403.3 feet	Key Note Segment		5 ft	97			
91946	403.4 to 404.4 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: E *side of* **S WOLFTRAP ST** *Starting at:* **CHIANTI AVE** **$80,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111332	S WOLFTRAP ST	DESERT RANCH WAY	GAMAY AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92086	0.0 to 74.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	371	SF	$120	**$44,520**
92076	16.1 to 17.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
92077	20.2 to 24.0 feet	**Vertical Change**	.26"	5 ft	19	REF		
92078	44.0 to 45.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
92079	61.9 to 65.0 feet	**Vertical Change**	.43"	5 ft	16	REF		
92080	66.4 to 67.4 feet	**Vertical Change**	.86"	5 ft	5	SF	$75	**$375**
92081	76.5 to 77.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
92087	76.9 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92082	80.3 to 81.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
92088	81.8 to 84.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
92089	85.1 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
92090	95.6 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
92083	96.5 to 97.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
92091	107.7 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
92092	123.2 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
92084	138.4 to 139.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
92085	142.7 to 143.7 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **DESERT RANCH WAY** **$74,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111428	S WOLFTRAP ST	GAMAY AVE	CAPISTRANO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92529	0.7 to 1.7 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
92540	5.0 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
92554	15.5 to 34.4 feet	Key Note Segment		5 ft	95			
92541	35.6 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,820
92555	40.3 to 60.1 feet	Key Note Segment		5 ft	99			
92542	62.7 to 72.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	$6,000
92543	72.7 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,380
92530	80.6 to 81.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
92544	83.7 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
92545	89.7 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
92546	100.0 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
92531	107.2 to 108.2 feet	Vertical Change	.54"	5 ft	5	SF	$75	$375
92547	114.1 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
92556	115.9 to 135.5 feet	Key Note Segment		5 ft	98			
92532	118.8 to 119.8 feet	Vertical Change	-.26"	5 ft	5	REF		
92533	125.7 to 126.7 feet	Vertical Change	.27"	5 ft	5	REF		
92534	132.6 to 133.6 feet	Vertical Change	.29"	5 ft	5	REF		
92548	136.5 to 140.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	$800
92557	141.9 to 161.1 feet	Key Note Segment		5 ft	96			
92549	163.9 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
92550	171.3 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
92535	189.7 to 190.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
92551	208.3 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
92558	214.1 to 235.3 feet	Key Note Segment		5 ft	106			
92552	237.8 to 239.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
92559	240.6 to 261.8 feet	Key Note Segment		5 ft	106			
92536	251.4 to 252.4 feet	Vertical Change	.4"	5 ft	5	REF		
92537	262.3 to 263.3 feet	Vertical Change	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111428	S WOLFTRAP ST	GAMAY AVE	CAPISTRANO DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92553	272.9 to 277.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
92538	276.5 to 277.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
92539	280.7 to 281.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **GAMAY AVE** **$42,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121055	S WOLFTRAP ST	MAPLE ST	OAK ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94721	0.7 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
94741	27.0 to 47.8 feet	Key Note Segment		5 ft	104			
94713	30.6 to 31.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
94722	48.8 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
94742	54.8 to 75.7 feet	Key Note Segment		5 ft	105			
94714	55.5 to 56.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
94715	58.6 to 59.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
94716	65.7 to 66.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
94717	74.3 to 75.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
94723	77.1 to 80.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
94724	80.7 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
94725	99.9 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
94726	103.4 to 112.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
94727	112.7 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
94718	125.9 to 126.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
94728	127.0 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
94729	131.5 to 143.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
94719	142.7 to 143.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
94743	144.9 to 175.0 feet	Key Note Segment		5 ft	151			
94730	176.5 to 181.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
94744	182.3 to 207.0 feet	Key Note Segment		5 ft	124			
94731	208.8 to 211.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
94732	214.3 to 230.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
94733	234.3 to 250.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
94734	253.0 to 258.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
94735	258.6 to 263.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
94736	265.6 to 270.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
94745	271.5 to 300.4 feet	Key Note Segment		5 ft	144			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121055	S WOLFTRAP ST	MAPLE ST	OAK ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94737	302.5 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
94720	305.2 to 306.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
94746	308.7 to 337.1 feet	Key Note Segment		5 ft	142			
94738	337.5 to 351.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
94739	351.9 to 355.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
94740	355.9 to 360.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: E *side of* **S WOLFTRAP ST** *Starting at:* **MAPLE ST** **$103,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111458	S WOLFTRAP ST	MERLOT AVE	CHIANTI AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92917	0.0 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
92914	0.4 to 1.4 feet	**Vertical Change**	2.22"	5 ft	5	REF		
92918	11.1 to 22.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
92919	25.6 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,220**
92920	34.3 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
92921	38.9 to 44.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
92922	49.3 to 59.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
92923	60.7 to 66.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
92924	68.8 to 72.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
92925	72.5 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
92926	76.8 to 95.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
92915	84.8 to 85.8 feet	**Vertical Change**	1.03"	5 ft	5	REF		
92927	95.1 to 98.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
92928	100.1 to 111.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
92916	109.1 to 110.1 feet	**Vertical Change**	3.16"	5 ft	5	REF		
92929	114.9 to 124.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
92930	128.3 to 145.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,140**

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **MERLOT AVE** **$74,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120938	S WOLFTRAP ST	OAK ST	PLUMAS ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93882	0.3 to 7.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
93883	7.0 to 8.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
93876	11.2 to 12.2 feet	**Vertical Change**	3.53"	5 ft	5	REF		
93884	11.3 to 16.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
93885	16.3 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
93886	24.8 to 46.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
93887	46.3 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
93888	50.8 to 58.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
93889	59.3 to 60.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
93877	60.0 to 61.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
93890	62.9 to 64.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
93891	68.5 to 70.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
93892	72.4 to 81.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
93878	76.6 to 77.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
93893	89.3 to 91.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
93894	92.8 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
93895	102.3 to 108.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
93896	110.9 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
93897	129.3 to 132.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
93898	136.9 to 147.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
93879	140.7 to 141.7 feet	**Vertical Change**	3"	5 ft	5	REF		
93880	145.3 to 146.3 feet	**Vertical Change**	2.09"	5 ft	5	REF		
93881	147.5 to 148.5 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **OAK ST** **$67,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120940	S WOLFTRAP ST	PLUMAS ST	MAPLE ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93904	0.3 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
93905	6.3 to 9.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,740**
93906	13.3 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
93899	21.7 to 22.7 feet	Vertical Change	.32"	5 ft	5	REF		
93907	23.2 to 32.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
93908	34.1 to 37.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
93900	36.3 to 37.3 feet	Vertical Change	-.32"	5 ft	5	REF		
93909	39.8 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
93910	49.2 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93911	54.3 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
93912	58.4 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93901	61.6 to 62.6 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
93913	62.7 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93914	66.3 to 67.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
93915	69.8 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
93916	88.8 to 94.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
93917	97.3 to 98.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
93918	98.7 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
93919	107.8 to 116.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
93920	119.1 to 120.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
93921	120.2 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
93922	130.3 to 132.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
93923	136.1 to 144.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
93903	145.9 to 146.9 feet	Vertical Change	.47"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **S WOLFTRAP ST** *Starting at:* **PLUMAS ST** **$66,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211457	SAINT MARY AVE	MUNRAS AVE	STADIUM RD	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80113	13.7 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
80103	19.9 to 20.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
80130	21.7 to 43.4 feet	Key Note Segment		5 ft	109			
80104	43.8 to 44.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
80114	44.3 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
80115	55.1 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
80116	65.9 to 72.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
80117	74.0 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80131	75.5 to 98.2 feet	Key Note Segment		5 ft	114			
80118	99.3 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80132	103.8 to 127.8 feet	Key Note Segment		5 ft	120			
80119	132.9 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
80120	149.2 to 154.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
80105	151.3 to 152.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
80121	154.4 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
80122	159.4 to 174.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
80106	165.4 to 166.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
80123	176.8 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
80133	182.8 to 206.9 feet	Key Note Segment		5 ft	121			
80107	208.0 to 209.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
80124	208.0 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
80134	211.7 to 231.8 feet	Key Note Segment		5 ft	101			
80108	212.3 to 213.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
80125	234.8 to 294.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	297	SF	$120	**$35,580**
80109	250.8 to 251.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
80135	294.1 to 312.9 feet	Key Note Segment		5 ft	94			
80111	303.8 to 304.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
80126	313.8 to 315.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211457	SAINT MARY AVE	MUNRAS AVE	STADIUM RD	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80127	318.7 to 320.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
80136	320.3 to 339.2 feet	Key Note Segment		5 ft	95			
80112	329.9 to 330.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
80128	342.4 to 358.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
80129	358.3 to 367.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: N *side of* **SAINT MARY AVE** *Starting at:* **MUNRAS AVE** **$96,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081125	SALVADOR WY	JOSEPHINE CT	JADEN CT	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125859	0.0 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
125860	11.7 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
125861	17.2 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
125855	23.1 to 24.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
125856	31.5 to 32.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
125862	63.2 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
125863	82.6 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
125864	88.3 to 89.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
125857	92.0 to 93.0 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
125865	99.8 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
125866	117.7 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
125867	124.3 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
125858	131.6 to 132.6 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
125868	134.1 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**

TOTAL COST FOR: E *side of* **SALVADOR WY** *Starting at:* **JOSEPHINE CT** **$53,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081037	SALVADOR WY	LA JOLLA WY	JOSEPHINE CT	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125379	0.0 to 49.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	248	SF	$120	**$29,760**
125375	24.6 to 25.6 feet	**Vertical Change**	.69"	5 ft	5	REF		
125376	50.5 to 51.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
125380	51.3 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
125381	73.2 to 80.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
125377	76.3 to 77.3 feet	**Vertical Change**	.56"	5 ft	5	REF		
125382	85.2 to 92.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
125383	92.4 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
125384	100.7 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
125385	118.2 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
125378	119.4 to 120.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
125386	128.6 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
125387	133.1 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**

TOTAL COST FOR: W *side of* **SALVADOR WY** *Starting at:* **LA JOLLA WY** **$81,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211443	SAN ANDREA AVE	772 SAN ANDREA AVE	MUNRAS AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79986	4.0 to 18.8 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	74	SF	$120	**$8,880**
79987	21.5 to 25.3 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	19	SF	$120	**$2,280**
79988	28.9 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
79989	34.3 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
79990	39.3 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
79991	49.7 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
79992	65.4 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
80004	76.8 to 96.3 feet	Key Note Segment		5 ft	98			
79993	97.3 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
79994	101.2 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
80005	104.9 to 126.7 feet	Key Note Segment		5 ft	109			
79995	128.1 to 143.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
79996	145.3 to 150.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
79997	150.7 to 176.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
79983	176.1 to 177.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
80006	176.2 to 204.5 feet	Key Note Segment		5 ft	142			
79998	205.8 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
79999	210.4 to 212.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
79984	211.4 to 212.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
80007	212.6 to 232.3 feet	Key Note Segment		5 ft	99			
80000	232.4 to 265.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	165	SF	$40	**$6,580**
80008	267.0 to 286.0 feet	Key Note Segment		5 ft	95			
80001	287.7 to 294.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
80002	297.0 to 299.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
80003	299.7 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
79985	313.4 to 314.4 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAN ANDREA AVE** *Starting at:* **772 SAN ANDREA AVE** **$88,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211438	SAN ANDREA AVE	MUNRAS AVE	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79950	4.2 to 29.5 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	127	SF	$120	**$15,180**
79940	40.1 to 41.1 feet	Vertical Change	.59"	5 ft	5	SF	$75	**$375**
79951	44.3 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
79968	47.2 to 68.4 feet	Key Note Segment		5 ft	106			
79941	57.5 to 58.5 feet	Vertical Change	-.32"	5 ft	5	REF		
79952	68.8 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
79942	74.7 to 75.7 feet	Vertical Change	2.86"	5 ft	5	REF		
79953	79.3 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
79943	99.4 to 100.4 feet	Vertical Change	.26"	5 ft	5	REF		
79969	104.2 to 125.8 feet	Key Note Segment		5 ft	108			
79954	126.3 to 133.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	36	SF	$40	**$1,420**
79944	133.5 to 134.5 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**
79970	133.5 to 156.4 feet	Key Note Segment		5 ft	115			
79955	156.8 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
79956	172.9 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
79957	189.3 to 209.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
79971	209.3 to 229.0 feet	Key Note Segment		5 ft	99			
79945	219.6 to 220.6 feet	Vertical Change	.5"	5 ft	5	REF		
79958	233.7 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
79972	244.3 to 272.3 feet	Key Note Segment		5 ft	140			
79946	262.0 to 263.0 feet	Vertical Change	.26"	5 ft	5	REF		
79959	273.3 to 287.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
79947	277.4 to 278.4 feet	Vertical Change	.26"	5 ft	5	REF		
79960	287.3 to 307.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
79961	307.1 to 317.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
79973	319.4 to 339.3 feet	Key Note Segment		5 ft	100			
79962	340.5 to 350.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
79974	350.5 to 382.1 feet	Key Note Segment		5 ft	158			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211438	SAN ANDREA AVE	MUNRAS AVE	STADIUM RD	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79949	382.5 to 383.5 feet	Vertical Change	.42"	5 ft	5	REF		
79963	383.3 to 386.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79964	386.5 to 403.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,320**
79975	405.0 to 427.1 feet	Key Note Segment		5 ft	111			
79965	427.8 to 442.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
79966	443.0 to 449.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
79967	449.0 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: N *side of* **SAN ANDREA AVE** *Starting at:* **MUNRAS AVE** **$130,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211441	SAN ANDREA AVE	STADIUM RD	792 SAN ANDREA AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79977	1.0 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
79980	21.5 to 41.4 feet	Key Note Segment		5 ft	100			
79976	41.1 to 42.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
79978	42.5 to 43.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
79979	43.5 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: S *side of* **SAN ANDREA AVE** *Starting at:* **STADIUM RD** **$14,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211304	SAN ANGELO AVE	MUNRAS AVE	STADIUM RD	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79421	2.7 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
79422	11.9 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
79437	26.1 to 44.8 feet	Key Note Segment		5 ft	94			
79423	45.5 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,560**
79408	65.9 to 66.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
79438	78.4 to 97.7 feet	Key Note Segment		5 ft	96			
79409	97.1 to 98.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
79410	103.1 to 104.1 feet	**Vertical Change**	-1.65"	5 ft	5	SF	$75	**$375**
79411	107.3 to 108.3 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
79439	108.9 to 127.0 feet	Key Note Segment		5 ft	91			
79412	117.0 to 118.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
79424	127.8 to 147.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
79413	129.1 to 130.1 feet	**Vertical Change**	.63"	5 ft	5	REF		
79414	144.4 to 145.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
79425	147.0 to 153.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
79415	151.4 to 152.4 feet	**Vertical Change**	-.55"	5 ft	5	REF		
79426	158.6 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
79427	177.4 to 182.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
79440	184.7 to 202.8 feet	Key Note Segment		5 ft	91			
79416	186.0 to 187.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
79428	203.8 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
79429	208.1 to 215.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
79441	216.3 to 234.2 feet	Key Note Segment		5 ft	90			
79417	216.6 to 217.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
79430	236.3 to 246.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
79431	248.6 to 252.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
79432	254.7 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
79433	269.7 to 291.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211304	SAN ANGELO AVE	MUNRAS AVE	STADIUM RD	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79419	280.5 to 281.5 feet	Vertical Change	-.27"	5 ft	5	REF		
79420	283.8 to 284.8 feet	Vertical Change	.3"	5 ft	5	REF		
79442	292.3 to 311.7 feet	Key Note Segment		5 ft	97			
79434	314.7 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
79443	323.2 to 341.6 feet	Key Note Segment		5 ft	92			
79435	343.3 to 352.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
79436	352.1 to 365.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**

TOTAL COST FOR: N *side of* **SAN ANGELO AVE** *Starting at:* **MUNRAS AVE** **$110,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211301	SAN ANGELO AVE	STADIUM RD	MUNRAS AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79383	0.0 to 8.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
79384	10.3 to 16.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
79385	20.1 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
79401	25.4 to 44.0 feet	Key Note Segment		5 ft	93			
79386	47.1 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
79402	51.7 to 81.5 feet	Key Note Segment		5 ft	149			
79377	53.1 to 54.1 feet	**Vertical Change**	.53"	5 ft	5	REF		
79387	82.2 to 91.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	47	SF	$40	**$1,880**
79378	91.3 to 92.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
79388	91.6 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
79389	101.5 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
79390	116.3 to 132.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
79379	119.8 to 120.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
79403	132.5 to 151.3 feet	Key Note Segment		5 ft	94			
79380	142.1 to 143.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
79391	152.8 to 156.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
79404	160.1 to 179.8 feet	Key Note Segment		5 ft	99			
79392	180.8 to 205.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,880**
79393	206.5 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
79405	239.7 to 259.2 feet	Key Note Segment		5 ft	98			
79394	260.6 to 264.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
79395	264.6 to 266.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
79406	269.3 to 297.0 feet	Key Note Segment		5 ft	139			
79396	297.0 to 298.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
79397	298.6 to 319.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
79381	309.0 to 310.0 feet	**Vertical Change**	1.02"	5 ft	5	REF		
79407	323.1 to 342.3 feet	Key Note Segment		5 ft	96			
79398	344.6 to 345.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211301	SAN ANGELO AVE	STADIUM RD	MUNRAS AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79399	348.6 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
79400	365.8 to 367.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
79382	367.5 to 368.5 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAN ANGELO AVE** *Starting at:* **STADIUM RD** **$99,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201237	SAN BRUNO AVE	1020 SAN BRUNO AVE	LIME AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105282	0.0 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
105283	11.2 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
105277	21.1 to 22.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105284	26.8 to 30.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
105285	30.8 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
105278	33.9 to 34.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
105279	44.5 to 45.5 feet	**Vertical Change**	-.52"	5 ft	5	REF		
105290	46.1 to 65.6 feet	Key Note Segment		5 ft	97			
105286	67.7 to 68.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
105287	71.0 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
105291	73.8 to 92.8 feet	Key Note Segment		5 ft	95			
105280	93.4 to 94.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
105288	94.3 to 97.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
105289	100.9 to 108.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
105281	102.8 to 103.8 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **SAN BRUNO AVE** *Starting at:* **1020 SAN BRUNO AVE** **$32,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201356	SAN BRUNO AVE	1999 SAN BRUNO AVE	1999 SAN BRUNO AVE	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105589	0.0 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	203	SF	$120	**$24,360**
105590	22.7 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: NE *side of* **SAN BRUNO AVE** *Starting at:* **1999 SAN BRUNO AVE** **$25,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201359	SAN BRUNO AVE	1999 SAN BRUNO AVE	LEMON AVE	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105593	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
105591	5.1 to 6.1 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
105594	11.3 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105595	16.9 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
105596	25.2 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
105592	37.0 to 38.0 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
105597	42.4 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	323	SF	$120	**$38,760**
105599	61.5 to 62.5 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
105598	111.4 to 127.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**

TOTAL COST FOR: NE *side of* **SAN BRUNO AVE** *Starting at:* **1999 SAN BRUNO AVE** **$58,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201421	SAN BRUNO AVE	LEMON AVE	VALENCIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105771	0.6 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
105772	2.2 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
105752	4.7 to 7.6 feet	**Vertical Change**	.32"	5 ft	15	LF	$75	**$1,088**
105773	8.1 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
105774	12.5 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
105795	27.4 to 47.2 feet	Key Note Segment		5 ft	99			
105753	38.3 to 39.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
105754	48.0 to 49.0 feet	**Vertical Change**	-1.95"	5 ft	5	REF		
105775	48.4 to 53.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
105796	54.4 to 75.3 feet	Key Note Segment		5 ft	105			
105756	75.5 to 76.5 feet	**Vertical Change**	.69"	5 ft	5	REF		
105776	75.8 to 78.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
105777	78.0 to 79.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
105778	79.6 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
105757	86.9 to 87.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
105779	114.3 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
105797	122.8 to 143.3 feet	Key Note Segment		5 ft	103			
105780	143.6 to 150.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
105798	150.7 to 169.6 feet	Key Note Segment		5 ft	95			
105758	151.7 to 152.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
105759	168.5 to 169.5 feet	**Vertical Change**	2.59"	5 ft	5	REF		
105760	170.6 to 171.6 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
105781	174.3 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,380**
105799	217.9 to 238.1 feet	Key Note Segment		5 ft	101			
105782	240.4 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
105800	244.8 to 264.5 feet	Key Note Segment		5 ft	99			
105761	246.8 to 247.8 feet	**Vertical Change**	.82"	5 ft	5	REF		
105783	266.2 to 275.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201421	SAN BRUNO AVE	LEMON AVE	VALENCIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105784	279.8 to 287.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
105785	290.9 to 295.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
105786	296.8 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
105801	312.6 to 333.7 feet	Key Note Segment		5 ft	105			
105762	313.0 to 314.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
105787	334.9 to 339.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
105802	339.6 to 359.4 feet	Key Note Segment		5 ft	99			
105764	343.9 to 344.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
105788	363.5 to 378.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
105766	369.4 to 370.4 feet	**Vertical Change**	.58"	5 ft	5	REF		
105789	386.3 to 387.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
105790	392.3 to 397.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
105791	403.3 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
105803	407.6 to 426.3 feet	Key Note Segment		5 ft	94			
105792	428.3 to 429.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
105793	429.5 to 435.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
105804	435.8 to 454.5 feet	Key Note Segment		5 ft	94			
105768	436.1 to 437.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
105769	454.6 to 455.6 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
105794	456.1 to 465.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
105770	465.0 to 466.0 feet	**Vertical Change**	.62"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **SAN BRUNO AVE** *Starting at:* **LEMON AVE** **$100,912.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201353	SAN BRUNO AVE	LIME AVE	188 SAN BRUNO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105565	1.1 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	29	SF	$120	**$3,480**
105566	8.6 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	36	SF	$120	**$4,320**
105567	27.6 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	18	SF	$120	**$2,160**
105568	38.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	180	SF	$120	**$21,600**
105569	59.0 to 62.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	39	SF	$120	**$4,680**
105570	63.2 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	51	SF	$120	**$6,120**
105571	71.5 to 75.1 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	36	SF	$120	**$4,320**
105572	77.3 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	95	SF	$120	**$11,400**
105573	90.4 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	32	SF	$120	**$3,840**
105574	93.6 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	28	SF	$120	**$3,360**
105575	99.3 to 101.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	18	SF	$120	**$2,160**
105576	102.0 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	267	SF	$120	**$32,040**
105560	116.7 to 117.7 feet	**Vertical Change**	1.94"	10 ft	10	REF		
105577	131.5 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	124	SF	$120	**$14,880**
105578	156.4 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	132	SF	$120	**$15,840**
105579	172.9 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	28	SF	$120	**$3,360**
105561	175.4 to 176.4 feet	**Vertical Change**	.94"	10 ft	10	REF		
105580	183.3 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	31	SF	$120	**$3,720**
105581	191.0 to 202.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	116	SF	$120	**$13,920**
105562	205.3 to 206.3 feet	**Vertical Change**	.58"	10 ft	10	REF		
105582	206.2 to 207.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	14	SF	$120	**$1,680**
105583	225.5 to 228.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	**$4,080**
105584	243.3 to 249.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	63	SF	$120	**$7,560**
105563	243.7 to 244.7 feet	**Vertical Change**	.31"	10 ft	10	REF		
105585	254.4 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	199	SF	$120	**$23,880**
105588	274.3 to 304.2 feet	Key Note Segment		10 ft	299			
105586	306.7 to 310.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	42	SF	$120	**$5,040**
105564	306.8 to 307.8 feet	**Vertical Change**	-.29"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201353	SAN BRUNO AVE	LIME AVE	188 SAN BRUNO AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105587	312.5 to 313.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **SAN BRUNO AVE** *Starting at:* **LIME AVE** **$194,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201134	SAN BRUNO AVE	RAYMOND THOMAS ST	VALENCIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104838	8.6 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
104828	22.2 to 23.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
104829	35.0 to 36.0 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
104839	37.0 to 38.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
104840	42.7 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
104849	62.8 to 83.0 feet	Key Note Segment		5 ft	101			
104830	81.1 to 82.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104841	84.9 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
104831	90.4 to 91.4 feet	**Vertical Change**	-.39"	5 ft	5	REF		
104850	98.8 to 118.4 feet	Key Note Segment		5 ft	98			
104832	109.5 to 110.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
104833	118.9 to 119.9 feet	**Vertical Change**	-.8"	5 ft	5	REF		
104842	119.4 to 120.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104843	121.2 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
104834	132.5 to 133.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104844	155.3 to 166.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
104851	168.7 to 188.0 feet	Key Note Segment		5 ft	97			
104845	197.7 to 201.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
104846	209.2 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
104852	220.3 to 240.0 feet	Key Note Segment		5 ft	99			
104835	240.0 to 241.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
104847	240.3 to 241.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
104848	247.9 to 251.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
104853	252.3 to 272.0 feet	Key Note Segment		5 ft	99			
104836	255.1 to 256.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
104837	260.3 to 261.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **SAN BRUNO AVE** *Starting at:* **RAYMOND THOMAS ST** **$61,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201129	SAN BRUNO AVE	VALENCIA AVE	RAYMOND THOMAS ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104812	0.0 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
104813	33.5 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
104814	47.8 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
104815	71.6 to 76.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
104816	79.4 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
104817	102.2 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
104818	129.1 to 130.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
104819	132.4 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
104820	141.3 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
104821	152.9 to 189.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,200**
104822	194.3 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
104823	207.0 to 209.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
104824	214.3 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
104825	239.3 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
104810	254.6 to 255.6 feet	**Vertical Change**	2.82"	5 ft	5	REF		
104826	261.2 to 291.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
104811	276.0 to 277.0 feet	**Vertical Change**	1.55"	5 ft	5	REF		
104827	295.1 to 323.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**

TOTAL COST FOR: NE *side of* **SAN BRUNO AVE** *Starting at:* **VALENCIA AVE** **$151,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201236	SAN BRUNO AVE	VALENCIA AVE	1012 SAN BRUNO AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105263	2.9 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
105249	12.2 to 13.2 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
105272	12.2 to 30.5 feet	Key Note Segment		5 ft	92			
105250	30.5 to 31.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
105273	37.6 to 57.9 feet	Key Note Segment		5 ft	102			
105251	38.1 to 39.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
105264	57.9 to 61.0 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	16	SF	$40	**$620**
105265	61.4 to 65.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
105252	65.5 to 66.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
105266	66.8 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105267	72.3 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
105268	78.5 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
105254	85.2 to 86.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105255	88.4 to 89.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
105274	105.8 to 125.5 feet	Key Note Segment		5 ft	99			
105256	106.4 to 107.4 feet	**Vertical Change**	.56"	5 ft	5	REF		
105257	125.6 to 126.6 feet	**Vertical Change**	-.89"	5 ft	5	REF		
105275	131.9 to 152.9 feet	Key Note Segment		5 ft	105			
105258	137.1 to 138.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
105259	152.9 to 153.9 feet	**Vertical Change**	.54"	5 ft	5	REF		
105269	155.6 to 195.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	200	SF	$120	**$23,940**
105260	175.3 to 176.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
105270	198.1 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
105276	200.2 to 221.6 feet	Key Note Segment		5 ft	107			
105261	201.0 to 202.0 feet	**Vertical Change**	.81"	5 ft	5	REF		
105262	222.2 to 223.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
105271	222.3 to 224.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**

TOTAL COST FOR: SW *side of* **SAN BRUNO AVE** *Starting at:* **VALENCIA AVE** **$49,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201035	SAN CARLOS AVE	937 SAN CARLOS AVE	TANGERINE AVE	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104549	39.3 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
104553	46.3 to 65.9 feet	Key Note Segment		5 ft	98			
104550	66.8 to 71.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
104547	72.5 to 73.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
104551	72.7 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
104554	76.2 to 96.5 feet	Key Note Segment		5 ft	102			
104548	87.2 to 88.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
104552	98.9 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: N *side of* **SAN CARLOS AVE** *Starting at:* **937 SAN CARLOS AVE** **$8,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201029	SAN CARLOS AVE	LEMON AVE	VALENCIA AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104512	1.4 to 19.8 feet	Key Note Segment		5 ft	92			
104496	1.7 to 2.7 feet	Vertical Change	-.3"	5 ft	5	REF		
104502	23.8 to 30.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
104513	30.2 to 48.7 feet	Key Note Segment		5 ft	93			
104503	49.4 to 65.8 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	82	SF	$40	$3,280
104497	49.6 to 50.6 feet	Vertical Change	.31"	5 ft	5	REF		
104504	69.3 to 72.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,800
104505	74.0 to 75.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
104506	76.7 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
104507	90.6 to 100.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
104508	100.8 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
104514	105.3 to 124.7 feet	Key Note Segment		5 ft	97			
104498	106.3 to 107.3 feet	Vertical Change	.34"	5 ft	5	REF		
104499	115.8 to 116.8 feet	Vertical Change	.27"	5 ft	5	REF		
104509	125.2 to 131.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	32	SF	$40	$1,280
104515	132.5 to 151.8 feet	Key Note Segment		5 ft	97			
104500	152.3 to 153.3 feet	Vertical Change	.29"	5 ft	5	REF		
104510	155.3 to 175.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	$11,940
104511	175.2 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
104501	178.1 to 179.1 feet	Vertical Change	.5"	5 ft	5	SF	$75	$375

TOTAL COST FOR: N *side of* **SAN CARLOS AVE** *Starting at:* **LEMON AVE** **$35,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201109	SAN CARLOS AVE	TANGERINE AVE	VALENCIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104742	0.0 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
104757	13.3 to 32.2 feet	Key Note Segment		5 ft	95			
104723	36.4 to 37.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104743	37.0 to 39.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
104724	38.1 to 39.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
104758	40.9 to 60.4 feet	Key Note Segment		5 ft	98			
104744	62.7 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
104725	70.7 to 71.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
104745	73.8 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
104726	80.5 to 81.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
104759	108.1 to 127.1 feet	Key Note Segment		5 ft	95			
104727	118.1 to 119.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
104746	129.2 to 135.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
104760	135.6 to 155.1 feet	Key Note Segment		5 ft	98			
104728	145.9 to 146.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
104747	156.7 to 160.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
104748	160.2 to 169.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
104749	173.3 to 202.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	144	SF	$120	**$17,280**
104729	188.1 to 189.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
104761	202.8 to 222.4 feet	Key Note Segment		5 ft	98			
104730	222.5 to 223.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
104750	223.9 to 228.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
104762	228.8 to 250.1 feet	Key Note Segment		5 ft	107			
104731	229.7 to 230.7 feet	**Vertical Change**	-.42"	5 ft	5	REF		
104732	236.2 to 237.2 feet	**Vertical Change**	2.06"	5 ft	5	REF		
104733	245.3 to 246.3 feet	**Vertical Change**	3.32"	5 ft	5	REF		
104734	250.1 to 251.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
104751	250.9 to 251.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201109	SAN CARLOS AVE	TANGERINE AVE	VALENCIA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104752	251.9 to 253.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
104753	259.4 to 267.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
104735	262.2 to 263.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
104754	276.8 to 281.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
104736	279.5 to 280.5 feet	**Vertical Change**	-.41"	5 ft	5	REF		
104737	281.2 to 282.2 feet	**Vertical Change**	1.72"	5 ft	5	REF		
104763	282.8 to 302.4 feet	Key Note Segment		5 ft	98			
104738	292.7 to 293.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
104739	302.2 to 303.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104755	302.8 to 308.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
104756	308.3 to 335.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**
104740	314.2 to 315.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
104741	326.2 to 327.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAN CARLOS AVE** *Starting at:* **TANGERINE AVE** **$93,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201033	SAN CARLOS AVE	VALENCIA AVE	947 SAN CARLOS AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104524	0.0 to 1.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
104525	15.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
104526	22.8 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
104527	31.5 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
104542	32.8 to 51.8 feet	Key Note Segment		5 ft	95			
104517	42.6 to 43.6 feet	**Vertical Change**	.49"	5 ft	5	REF		
104518	55.1 to 56.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
104528	55.8 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
104543	59.9 to 80.3 feet	Key Note Segment		5 ft	102			
104519	60.7 to 61.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
104520	70.6 to 71.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
104529	80.8 to 82.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
104530	82.9 to 85.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
104531	92.3 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
104532	98.8 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
104533	108.3 to 111.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
104534	114.0 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
104535	115.3 to 126.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
104544	127.3 to 146.5 feet	Key Note Segment		5 ft	96			
104536	148.8 to 153.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
104537	153.7 to 155.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
104545	155.0 to 174.3 feet	Key Note Segment		5 ft	97			
104521	155.7 to 156.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
104522	174.8 to 175.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
104538	175.8 to 179.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
104539	179.2 to 183.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
104540	189.0 to 194.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
104546	222.6 to 241.4 feet	Key Note Segment		5 ft	94			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201033	SAN CARLOS AVE	VALENCIA AVE	947 SAN CARLOS AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104523	232.7 to 233.7 feet	Vertical Change	.33"	5 ft	5	REF		
104541	242.5 to 246.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: N *side of* **SAN CARLOS AVE** *Starting at:* **VALENCIA AVE** **$38,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201012	SAN CARLOS AVE	VALENCIA AVE	LEMON AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104391	0.8 to 21.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,120**
104382	11.9 to 12.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104403	21.8 to 41.6 feet	Key Note Segment		5 ft	99			
104392	42.3 to 48.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,220**
104404	49.6 to 68.3 feet	Key Note Segment		5 ft	94			
104383	49.8 to 50.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
104393	69.6 to 72.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
104394	72.0 to 109.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	188	SF	$120	**$22,560**
104384	83.6 to 84.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
104395	112.8 to 114.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
104396	114.8 to 117.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
104405	117.5 to 136.8 feet	Key Note Segment		5 ft	97			
104385	118.5 to 119.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
104386	127.8 to 128.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
104397	138.6 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
104406	144.2 to 163.1 feet	Key Note Segment		5 ft	95			
104387	163.5 to 164.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
104398	164.3 to 176.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
104388	168.2 to 169.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
104399	179.0 to 180.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
104400	182.9 to 198.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
104401	202.2 to 203.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104402	203.5 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
104390	210.9 to 211.9 feet	**Vertical Change**	1.15"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **SAN CARLOS AVE** *Starting at:* **VALENCIA AVE** **$65,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201053	SAN DIEGO AVE	CITRUS WAY	SAN JOSE AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104655	1.5 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
104642	4.2 to 5.2 feet	Vertical Change	-.56"	5 ft	5	REF		
104656	11.5 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
104643	21.8 to 22.8 feet	Vertical Change	.47"	5 ft	5	REF		
104644	32.3 to 33.3 feet	Vertical Change	-.36"	5 ft	5	REF		
104657	35.7 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	233	SF	$120	**$27,960**
104645	70.7 to 71.7 feet	Vertical Change	-.48"	5 ft	5	REF		
104658	84.7 to 119.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	175	SF	$120	**$20,940**
104646	87.8 to 88.8 feet	Vertical Change	.26"	5 ft	5	REF		
104647	94.3 to 97.5 feet	Vertical Change	.27"	5 ft	16	REF		
104648	98.6 to 99.6 feet	Vertical Change	-.29"	5 ft	5	REF		
104650	109.3 to 110.3 feet	Vertical Change	.31"	5 ft	5	REF		
104659	121.8 to 134.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
104660	134.1 to 135.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	6	SF	$40	**$240**
104661	137.8 to 163.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	128	SF	$40	**$5,140**
104651	147.4 to 148.4 feet	Vertical Change	.26"	5 ft	5	REF		
104652	149.5 to 150.5 feet	Vertical Change	-.26"	5 ft	5	REF		
104653	159.8 to 160.8 feet	Vertical Change	-.44"	5 ft	5	REF		
104654	169.5 to 170.5 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
104662	170.9 to 174.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: NE *side of* **SAN DIEGO AVE** *Starting at:* **CITRUS WAY** **$84,595.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201408	SAN DIEGO AVE	LEMON AVE	VALENCIA AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105692	0.4 to 20.8 feet	Key Note Segment		5 ft	102			
105668	24.3 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
105669	39.7 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
105670	41.3 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
105652	42.6 to 43.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
105653	52.0 to 53.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
105671	52.5 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
105654	60.3 to 61.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
105693	71.7 to 92.8 feet	Key Note Segment		5 ft	106			
105655	72.8 to 73.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
105656	77.5 to 78.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
105657	89.8 to 90.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
105672	93.4 to 98.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	26	SF	$40	**$1,020**
105673	101.8 to 102.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
105658	102.5 to 103.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
105694	105.0 to 123.3 feet	Key Note Segment		5 ft	92			
105660	123.4 to 124.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
105674	146.6 to 148.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
105661	149.2 to 150.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
105675	152.3 to 159.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
105662	169.6 to 170.6 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
105676	174.1 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
105695	175.3 to 196.0 feet	Key Note Segment		5 ft	104			
105663	176.2 to 177.2 feet	**Vertical Change**	-.46"	5 ft	5	REF		
105664	188.0 to 189.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
105677	197.1 to 199.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
105665	197.4 to 198.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
105678	201.8 to 203.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201408	SAN DIEGO AVE	LEMON AVE	VALENCIA AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105696	210.8 to 230.5 feet	Key Note Segment		5 ft	99			
105666	230.4 to 231.4 feet	Vertical Change	.7"	5 ft	5	REF		
105679	232.5 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
105680	238.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
105681	245.1 to 246.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
105682	246.5 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
105683	253.1 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
105667	263.6 to 264.6 feet	Vertical Change	-.26"	5 ft	5	REF		
105684	263.6 to 271.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,740
105685	276.1 to 312.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	$21,900
105686	315.4 to 334.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	$11,400
105687	334.4 to 343.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	$5,340
105688	349.1 to 353.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
105689	355.3 to 374.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,220
105697	376.1 to 377.1 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
105690	378.3 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
105691	391.9 to 394.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380

TOTAL COST FOR: N *side of* **SAN DIEGO AVE** *Starting at:* **LEMON AVE** **$94,464.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201043	SAN DIEGO AVE	SAN JOSE AVE	VALENCIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104607	0.8 to 19.3 feet	Key Note Segment		5 ft	93			
104578	37.8 to 38.8 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
104593	48.6 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
104608	56.2 to 75.6 feet	Key Note Segment		5 ft	97			
104579	56.6 to 57.6 feet	Vertical Change	1.98"	5 ft	5	REF		
104580	72.4 to 73.4 feet	Vertical Change	2.66"	5 ft	5	REF		
104581	76.2 to 77.2 feet	Vertical Change	-.39"	5 ft	5	REF		
104594	77.8 to 83.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
104609	83.9 to 103.3 feet	Key Note Segment		5 ft	97			
104595	115.6 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
104610	141.3 to 160.6 feet	Key Note Segment		5 ft	96			
104582	142.1 to 143.1 feet	Vertical Change	-.49"	5 ft	5	REF		
104596	162.4 to 163.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
104597	163.6 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
104611	169.2 to 188.6 feet	Key Note Segment		5 ft	97			
104583	169.8 to 170.8 feet	Vertical Change	.31"	5 ft	5	REF		
104584	189.0 to 190.0 feet	Vertical Change	-.3"	5 ft	5	REF		
104598	196.0 to 205.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
104599	208.0 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
104600	229.0 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
104585	230.4 to 231.4 feet	Vertical Change	-.32"	5 ft	5	REF		
104612	235.8 to 256.6 feet	Key Note Segment		5 ft	104			
104601	256.6 to 260.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	21	SF	$40	$840
104602	260.8 to 263.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,860
104613	263.9 to 284.1 feet	Key Note Segment		5 ft	101			
104586	264.5 to 265.5 feet	Vertical Change	.31"	5 ft	5	REF		
104587	283.9 to 284.9 feet	Vertical Change	.35"	5 ft	5	REF		
104603	285.1 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	$9,060

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2201201043	SAN DIEGO AVE	SAN JOSE AVE	VALENCIA AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104588	305.9 to 306.9 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
104614	331.3 to 350.8 feet	Key Note Segment		5 ft	98			
104589	331.7 to 332.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
104604	352.2 to 353.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
104615	358.7 to 378.4 feet	Key Note Segment		5 ft	99			
104590	368.9 to 369.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
104605	386.0 to 388.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
104606	400.5 to 401.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
104591	404.5 to 405.5 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
104592	417.9 to 418.9 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: SW *side of* **SAN DIEGO AVE** *Starting at:* **SAN JOSE AVE** **$39,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2201201045	SAN DIEGO AVE	VALENCIA AVE	CITRUS WAY	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104618	0.3 to 1.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
104619	1.9 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
104620	6.0 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
104616	6.9 to 7.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
104621	19.4 to 31.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
104622	41.3 to 64.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
104617	54.8 to 55.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: NE *side of* **SAN DIEGO AVE** *Starting at:* **VALENCIA AVE** **$27,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201412	SAN DIEGO AVE	VALENCIA AVE	LEMON AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105710	0.0 to 8.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
105711	8.3 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
105712	16.8 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
105698	33.5 to 34.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
105713	53.6 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
105699	54.4 to 55.4 feet	**Vertical Change**	2.1"	5 ft	5	REF		
105714	63.8 to 79.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,180**
105700	71.3 to 72.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
105715	79.3 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
105716	94.5 to 105.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
105717	111.1 to 132.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
105701	121.1 to 122.1 feet	**Vertical Change**	2.8"	5 ft	5	REF		
105718	132.3 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
105702	154.2 to 155.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
105719	160.8 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
105720	167.1 to 172.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
105721	175.2 to 191.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
105722	194.9 to 196.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
105723	199.6 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
105703	202.6 to 203.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
105724	210.4 to 227.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
105725	227.8 to 253.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
105726	256.4 to 258.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
105727	270.7 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105728	276.8 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
105704	279.2 to 280.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
105705	292.1 to 293.1 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
105729	297.6 to 354.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201412	SAN DIEGO AVE	VALENCIA AVE	LEMON AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105706	317.8 to 318.8 feet	Vertical Change	.29"	5 ft	5	REF		
105707	330.5 to 331.5 feet	Vertical Change	-.26"	5 ft	5	REF		
105708	343.3 to 344.3 feet	Vertical Change	-.33"	5 ft	5	REF		
105709	356.2 to 357.2 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
105730	358.7 to 376.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
105731	378.0 to 380.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **SAN DIEGO AVE** *Starting at:* **VALENCIA AVE** **$182,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191032	SAN GABRIEL DR	297 SAN GABRIEL DR	VERDE MESA WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72928	1.8 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
72929	4.2 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
72930	10.3 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
72931	13.3 to 15.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,242**
72932	18.1 to 21.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,782**
72933	24.9 to 47.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,204**
72944	47.7 to 67.4 feet	Key Note Segment		5 ft	89			
72920	57.2 to 58.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
72921	66.8 to 67.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
72934	69.5 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,452**
72935	83.8 to 86.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,188**
72922	84.2 to 85.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
72936	88.5 to 95.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,942**
72923	90.6 to 91.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
72924	97.7 to 98.7 feet	**Vertical Change**	2.39"	5 ft	5	SF	$75	**$338**
72937	98.8 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,122**
72945	123.1 to 141.9 feet	Key Note Segment		5 ft	85			
72925	142.0 to 143.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
72938	142.0 to 143.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$180**
72939	143.4 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,970**
72946	150.8 to 171.2 feet	Key Note Segment		5 ft	92			
72940	171.3 to 198.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	122	SF	$40	**$4,896**
72926	193.4 to 194.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
72941	201.3 to 203.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
72942	203.3 to 205.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72947	206.0 to 224.8 feet	Key Note Segment		5 ft	85			
72927	224.6 to 225.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
72943	229.5 to 237.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191032	SAN GABRIEL DR	297 SAN GABRIEL DR	VERDE MESA WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**E**	*side of* **SAN GABRIEL DR**	*Starting at:* **297 SAN GABRIEL DR**					**$57,847.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110190947	SAN GABRIEL DR	LA QUINTA WAY	MIRA LOMA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72642	3.3 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,350**
72643	5.8 to 16.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,886**
72644	18.0 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,050**
72637	18.3 to 19.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
72645	29.5 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
72660	32.5 to 49.9 feet	Key Note Segment		5 ft	78			
72646	50.8 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
72661	58.8 to 77.1 feet	Key Note Segment		5 ft	82			
72647	77.8 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
72648	82.8 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
72638	87.5 to 88.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
72649	93.4 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,426**
72639	94.5 to 95.5 feet	**Vertical Change**	.6"	5 ft	5	REF		
72650	108.6 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,316**
72662	124.8 to 144.0 feet	Key Note Segment		5 ft	86			
72651	146.3 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,470**
72663	176.8 to 198.0 feet	Key Note Segment		5 ft	95			
72640	199.7 to 200.7 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$338**
72652	203.3 to 206.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,512**
72664	206.1 to 225.3 feet	Key Note Segment		5 ft	86			
72653	227.5 to 239.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
72654	240.2 to 241.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$594**
72655	242.3 to 243.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
72656	250.5 to 255.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,484**
72657	271.5 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,348**
72665	280.4 to 300.8 feet	Key Note Segment		5 ft	92			
72658	305.7 to 307.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,188**
72666	307.9 to 328.9 feet	Key Note Segment		5 ft	95			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110190947	SAN GABRIEL DR	LA QUINTA WAY	MIRA LOMA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72659	340.3 to 351.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**

TOTAL COST FOR: E *side of* **SAN GABRIEL DR** *Starting at:* **LA QUINTA WAY** **$76,045.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191108	SAN GABRIEL DR	LINDA MESA DR	PASEO DEL MAR PRKW	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73322	4.5 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
73323	11.2 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,512**
73319	14.8 to 15.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
73324	15.1 to 16.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$540**
73325	18.2 to 35.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	**$9,396**
73326	36.6 to 46.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
73327	48.7 to 93.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	200	SF	$120	**$24,030**
73320	88.8 to 89.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
73328	93.4 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,566**
73329	96.3 to 100.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,268**
73330	100.5 to 112.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,696**
73331	118.9 to 129.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,778**
73332	130.3 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,130**
73321	138.9 to 139.9 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SAN GABRIEL DR** *Starting at:* **LINDA MESA DR** **$63,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191029	SAN GABRIEL DR	MIRA LOMA WAY	297 SAN GABRIEL DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72916	0.8 to 22.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,664**
72918	22.4 to 42.8 feet	Key Note Segment		5 ft	92			
72917	45.4 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**

TOTAL COST FOR: E *side of* **SAN GABRIEL DR** *Starting at:* **MIRA LOMA WAY** **$12,798.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191121	SAN GABRIEL DR	PASEO DEL MAR PRKW	LA QUINTA WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73489	0.5 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
73490	3.1 to 48.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	206	SF	$120	**$24,678**
73486	46.4 to 47.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
73491	52.4 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
73487	57.2 to 58.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
73492	64.7 to 81.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
73493	82.3 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,510**
73494	90.9 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,106**
73495	95.9 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,118**
73496	130.6 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,158**
73488	137.5 to 138.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
73497	138.3 to 139.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**

TOTAL COST FOR: W *side of* **SAN GABRIEL DR** *Starting at:* **PASEO DEL MAR PRKW** **$68,418.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191053	SAN GABRIEL DR	VERDE MESA WAY	LINDA MESA DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73162	0.5 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,882**
73159	19.5 to 20.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$338**
73163	21.3 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
73164	47.2 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,026**
73165	51.4 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
73160	56.8 to 57.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
73166	60.1 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
73167	69.1 to 70.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$648**
73168	70.3 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,292**
73169	85.3 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,628**
73170	124.3 to 129.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,808**
73171	129.7 to 135.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,348**
73172	136.1 to 137.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$540**
73173	139.3 to 140.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$864**
73161	141.5 to 142.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: W *side of* **SAN GABRIEL DR** *Starting at:* **VERDE MESA WAY** **$64,557.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201057	SAN JOSE AVE	CITRUS WAY	VALENCIA AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104678	0.0 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	191	SF	$120	**$22,980**
104679	42.2 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
104677	64.8 to 65.8 feet	**Vertical Change**	1.06"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **SAN JOSE AVE** *Starting at:* **CITRUS WAY** **$33,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201435	SAN JOSE AVE	LEMON AVE	VALENCIA AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105934	10.7 to 31.3 feet	Key Note Segment		5 ft	103			
105911	31.5 to 32.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
105926	35.0 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
105935	40.6 to 63.0 feet	Key Note Segment		5 ft	112			
105912	40.9 to 41.9 feet	Vertical Change	-.39"	5 ft	5	REF		
105913	50.4 to 51.4 feet	Vertical Change	.31"	5 ft	5	REF		
105914	63.4 to 64.4 feet	Vertical Change	.36"	5 ft	5	REF		
105927	65.3 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
105915	68.2 to 69.2 feet	Vertical Change	.26"	5 ft	5	REF		
105928	72.6 to 74.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
105929	89.4 to 92.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
105930	105.4 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
105936	117.8 to 137.2 feet	Key Note Segment		5 ft	97			
105916	118.2 to 119.2 feet	Vertical Change	-.28"	5 ft	5	REF		
105917	127.9 to 128.9 feet	Vertical Change	-.26"	5 ft	5	REF		
105918	137.1 to 138.1 feet	Vertical Change	-.43"	5 ft	5	REF		
105937	145.5 to 164.4 feet	Key Note Segment		5 ft	95			
105919	145.7 to 146.7 feet	Vertical Change	.65"	5 ft	5	REF		
105920	152.5 to 153.5 feet	Vertical Change	.64"	5 ft	5	REF		
105921	155.1 to 156.1 feet	Vertical Change	-.27"	5 ft	5	REF		
105922	191.1 to 192.1 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
105923	196.9 to 197.9 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
105938	197.0 to 216.8 feet	Key Note Segment		5 ft	99			
105924	206.9 to 207.9 feet	Vertical Change	.28"	5 ft	5	REF		
105931	218.6 to 234.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	$9,540
105925	235.2 to 236.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
105932	236.8 to 239.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
105933	244.8 to 247.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201435	SAN JOSE AVE	LEMON AVE	VALENCIA AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **SAN JOSE AVE**	*Starting at:* **LEMON AVE**					**$29,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201055	SAN JOSE AVE	SAN DIEGO AVE	CITRUS WAY	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104670	11.0 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
104663	23.8 to 24.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
104671	29.5 to 33.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
104672	33.5 to 44.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
104664	36.5 to 37.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104673	46.3 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
104666	62.1 to 63.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
104674	65.3 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
104667	68.6 to 69.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
104675	83.2 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
104668	99.5 to 100.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
104676	144.8 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,300**
104669	165.6 to 166.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **SAN JOSE AVE** *Starting at:* **SAN DIEGO AVE** **$43,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201103	SAN JOSE AVE	VALENCIA AVE	TANGERINE AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104687	0.0 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
104688	11.6 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
104689	17.2 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
104704	18.8 to 38.3 feet	Key Note Segment		5 ft	97			
104690	39.0 to 40.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
104691	54.8 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
104705	70.0 to 89.6 feet	Key Note Segment		5 ft	98			
104680	89.8 to 90.8 feet	Vertical Change	.35"	5 ft	5	REF		
104706	97.5 to 117.4 feet	Key Note Segment		5 ft	100			
104681	117.5 to 118.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
104692	119.1 to 120.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
104693	120.2 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
104694	130.1 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
104695	141.5 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	$13,620
104707	164.7 to 184.0 feet	Key Note Segment		5 ft	97			
104696	186.9 to 191.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$2,940
104708	192.6 to 212.4 feet	Key Note Segment		5 ft	99			
104682	202.7 to 203.7 feet	Vertical Change	.26"	5 ft	5	REF		
104683	212.1 to 213.1 feet	Vertical Change	.3"	5 ft	5	REF		
104697	213.3 to 217.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,640
104698	218.9 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
104699	246.2 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
104709	259.8 to 279.1 feet	Key Note Segment		5 ft	97			
104700	280.4 to 281.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
104701	281.9 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
104710	287.3 to 307.0 feet	Key Note Segment		5 ft	99			
104684	288.9 to 289.9 feet	Vertical Change	.3"	5 ft	5	REF		
104685	307.2 to 308.2 feet	Vertical Change	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201103	SAN JOSE AVE	VALENCIA AVE	TANGERINE AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104702	309.2 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
104703	318.4 to 322.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
104686	322.4 to 323.4 feet	**Vertical Change**	.56"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SAN JOSE AVE** *Starting at:* **VALENCIA AVE** **$52,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201437	SAN JOSE AVE	VALENCIA AVE	LEMON AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105948	0.3 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
105949	6.8 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
105950	13.8 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
105951	20.8 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
105962	22.9 to 42.7 feet	Key Note Segment		5 ft	99			
105939	23.6 to 24.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
105952	43.3 to 44.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
105953	44.5 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
105963	51.3 to 70.8 feet	Key Note Segment		5 ft	98			
105941	61.1 to 62.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
105942	70.8 to 71.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105954	72.2 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
105955	73.2 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
105956	96.6 to 98.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
105957	105.1 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
105958	112.8 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
105964	126.5 to 145.8 feet	Key Note Segment		5 ft	97			
105943	127.4 to 128.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
105944	146.5 to 147.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
105959	149.9 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105965	158.9 to 178.3 feet	Key Note Segment		5 ft	97			
105945	161.8 to 165.7 feet	**Vertical Change**	.31"	5 ft	19	REF		
105946	171.5 to 172.5 feet	**Vertical Change**	-.61"	5 ft	5	REF		
105947	178.2 to 181.4 feet	**Vertical Change**	.3"	5 ft	16	REF		
105960	188.4 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105961	193.6 to 195.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: S *side of* **SAN JOSE AVE** *Starting at:* **VALENCIA AVE** **$36,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171221	SAN JUAN DR	ASILOMAR DR	SANTA LUCIA DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89476	0.0 to 25.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
89469	25.6 to 26.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
89487	26.0 to 45.8 feet	Key Note Segment		5 ft	99			
89477	46.4 to 52.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,280**
89488	53.5 to 83.7 feet	Key Note Segment		5 ft	151			
89470	60.8 to 61.8 feet	**Vertical Change**	1.13"	5 ft	5	REF		
89471	83.7 to 84.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
89478	85.1 to 90.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
89479	96.2 to 100.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
89480	102.3 to 106.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
89481	106.6 to 109.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
89489	109.0 to 129.6 feet	Key Note Segment		5 ft	103			
89482	130.9 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
89483	141.7 to 193.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	260	SF	$120	**$31,200**
89472	182.5 to 183.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
89490	193.8 to 214.0 feet	Key Note Segment		5 ft	101			
89484	215.4 to 216.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
89485	219.3 to 221.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
89491	221.3 to 244.2 feet	Key Note Segment		5 ft	115			
89473	234.0 to 235.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
89474	244.3 to 245.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
89486	245.7 to 267.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,200**
89492	266.1 to 268.5 feet		5.0-6.0%	5 ft	12			
89493	266.1 to 268.5 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
89475	268.5 to 269.5 feet	**Vertical Change**	.8"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **SAN JUAN DR** *Starting at:* **ASILOMAR DR** **$79,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171223	SAN JUAN DR	SANTA LUCIA DR	ASILOMAR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89500	0.4 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
89501	5.8 to 12.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
89502	12.6 to 19.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
89503	23.1 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
89517	26.3 to 45.5 feet	Key Note Segment		5 ft	96			
89494	34.7 to 35.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
89504	46.8 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
89505	50.5 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
89518	52.3 to 73.3 feet	Key Note Segment		5 ft	105			
89495	66.1 to 67.1 feet	**Vertical Change**	.53"	5 ft	5	REF		
89506	75.1 to 76.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
89507	79.0 to 80.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
89508	80.6 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
89509	86.0 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
89510	112.5 to 117.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
89511	117.1 to 123.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
89512	126.4 to 131.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
89513	131.6 to 137.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,720**
89519	137.8 to 156.8 feet	Key Note Segment		5 ft	95			
89514	166.7 to 194.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**
89496	171.1 to 172.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
89520	194.0 to 213.4 feet	Key Note Segment		5 ft	97			
89497	203.2 to 204.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
89515	216.9 to 220.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
89521	220.9 to 250.3 feet	Key Note Segment		5 ft	147			
89498	231.6 to 232.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
89499	238.4 to 241.2 feet	**Vertical Change**	.26"	5 ft	14	REF		
89516	253.1 to 266.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171223	SAN JUAN DR	SANTA LUCIA DR	ASILOMAR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **SAN JUAN DR**	*Starting at:* **SANTA LUCIA DR**					**$72,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211449	SAN MARCO AVE	MUNRAS AVE	STADIUM RD	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80026	0.3 to 21.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
80020	13.1 to 14.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
80043	21.6 to 42.9 feet	Key Note Segment		5 ft	107			
80021	32.6 to 33.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
80027	43.7 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,660**
80028	72.5 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
80044	76.1 to 98.1 feet	Key Note Segment		5 ft	110			
80029	100.2 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
80045	104.9 to 128.5 feet	Key Note Segment		5 ft	118			
80022	105.8 to 106.8 feet	**Vertical Change**	3.54"	5 ft	5	REF		
80023	109.5 to 110.5 feet	**Vertical Change**	.78"	5 ft	5	REF		
80024	118.7 to 119.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
80030	133.1 to 134.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
80031	134.2 to 161.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
80032	167.3 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
80033	184.9 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
80046	186.5 to 205.7 feet	Key Note Segment		5 ft	96			
80047	211.6 to 232.3 feet	Key Note Segment		5 ft	104			
80034	234.3 to 239.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
80035	240.5 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
80036	255.7 to 259.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
80037	262.2 to 266.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
80038	268.3 to 279.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
80039	279.5 to 284.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
80048	284.8 to 314.2 feet	Key Note Segment		5 ft	147			
80040	315.4 to 320.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
80025	320.9 to 321.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
80049	321.3 to 341.6 feet	Key Note Segment		5 ft	102			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110211449	SAN MARCO AVE	MUNRAS AVE	STADIUM RD	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80041	341.8 to 352.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	53	SF	$40	**$2,100**
80042	352.3 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**

TOTAL COST FOR: N *side of* **SAN MARCO AVE** *Starting at:* **MUNRAS AVE** **$93,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211452	SAN MARCO AVE	STADIUM RD	MUNRAS AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80057	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
80058	2.0 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
80059	18.4 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
80050	20.0 to 21.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
80084	21.3 to 42.4 feet	Key Note Segment		5 ft	106			
80051	31.4 to 32.4 feet	**Vertical Change**	-.37"	5 ft	5	REF		
80060	43.3 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
80085	52.9 to 72.0 feet	Key Note Segment		5 ft	96			
80052	62.4 to 63.4 feet	**Vertical Change**	.51"	5 ft	5	REF		
80053	71.9 to 72.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
80061	75.0 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
80062	82.3 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
80063	89.2 to 102.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
80064	102.9 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
80065	114.6 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80066	120.1 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
80067	127.9 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80086	129.8 to 151.8 feet	Key Note Segment		5 ft	110			
80054	142.4 to 143.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
80068	152.5 to 157.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	26	SF	$40	**$1,040**
80087	157.7 to 178.0 feet	Key Note Segment		5 ft	102			
80069	183.5 to 192.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
80070	195.4 to 199.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
80071	201.9 to 211.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
80055	212.7 to 213.7 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
80072	223.8 to 229.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
80073	232.8 to 236.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
80088	237.0 to 259.9 feet	Key Note Segment		5 ft	114			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211452	SAN MARCO AVE	STADIUM RD	MUNRAS AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80074	260.5 to 263.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$640
80075	263.7 to 264.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
80089	266.3 to 287.2 feet	Key Note Segment		5 ft	105			
80076	289.0 to 290.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
80077	290.3 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
80056	296.0 to 297.0 feet	Vertical Change	.27"	5 ft	5	REF		
80078	296.3 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
80079	300.8 to 310.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
80080	312.2 to 314.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
80090	319.3 to 342.5 feet	Key Note Segment		5 ft	116			
80081	344.3 to 359.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360
80082	359.9 to 363.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$2,040
80083	363.3 to 366.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980

TOTAL COST FOR: S *side of* **SAN MARCO AVE** *Starting at:* **STADIUM RD** **$79,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261322	SAN PIETRO DR	1378 SAN PIETRO DR	FRESHET DR	16

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109421	0.3 to 26.2 feet	Key Note Segment		5 ft	130			
109419	18.5 to 19.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
109420	34.2 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: W *side of* **SAN PIETRO DR** *Starting at:* **1378 SAN PIETRO DR** **$2,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261250	SAN PIETRO DR	3467 RUNNING BROOK DR	RUNNING BROOK DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109187	1.3 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109188	4.6 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
109183	14.1 to 15.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
109189	30.4 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
109184	32.2 to 33.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
109185	53.0 to 54.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
109190	64.5 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
109191	71.2 to 88.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
109186	78.6 to 79.6 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SAN PIETRO DR** *Starting at:* **3467 RUNNING BROOK DR** **$44,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261244	SAN PIETRO DR	FAIRFIELD WAY	RUNNING BROOK DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109152	0.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109153	8.3 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
109162	24.2 to 44.8 feet	Key Note Segment		5 ft	103			
109148	46.0 to 47.0 feet	**Vertical Change**	-.47"	5 ft	5	REF		
109154	46.5 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
109163	53.1 to 72.3 feet	Key Note Segment		5 ft	96			
109155	74.8 to 76.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
109156	77.8 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
109157	88.8 to 90.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
109158	90.1 to 93.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109149	93.9 to 94.9 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
109159	102.6 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109150	103.3 to 104.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
109164	105.3 to 123.7 feet	Key Note Segment		5 ft	92			
109160	127.0 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
109165	138.5 to 157.4 feet	Key Note Segment		5 ft	95			
109151	156.8 to 157.8 feet	**Vertical Change**	-.4"	5 ft	5	REF		
109161	159.7 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **SAN PIETRO DR** *Starting at:* **FAIRFIELD WAY** **$24,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261312	SAN PIETRO DR	FRESHET DR	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109369	2.3 to 18.2 feet	Key Note Segment		5 ft	80			
109349	22.5 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
109350	28.7 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
109339	28.8 to 29.8 feet	Vertical Change	.31"	5 ft	5	REF		
109370	32.8 to 46.8 feet	Key Note Segment		5 ft	70			
109340	40.1 to 41.1 feet	Vertical Change	.33"	5 ft	5	REF		
109351	47.3 to 48.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	**$280**
109352	53.5 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
109371	64.0 to 83.7 feet	Key Note Segment		5 ft	99			
109341	73.3 to 74.3 feet	Vertical Change	.26"	5 ft	5	REF		
109353	86.6 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
109354	90.8 to 96.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
109355	109.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109372	115.3 to 136.0 feet	Key Note Segment		5 ft	104			
109356	137.8 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
109373	144.7 to 163.5 feet	Key Note Segment		5 ft	94			
109342	154.1 to 155.1 feet	Vertical Change	.38"	5 ft	5	REF		
109357	164.8 to 167.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
109358	168.5 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
109343	171.1 to 172.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
109359	180.7 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
109360	206.7 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
109374	211.3 to 239.8 feet	Key Note Segment		5 ft	143			
109361	241.3 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109375	248.8 to 266.4 feet	Key Note Segment		5 ft	88			
109344	268.1 to 269.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
109345	274.2 to 275.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
109346	281.2 to 282.2 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261312	SAN PIETRO DR	FRESHET DR	FAIRFIELD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109362	283.8 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
109363	293.0 to 296.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
109364	301.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109365	306.3 to 309.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
109376	322.3 to 343.3 feet	Key Note Segment		5 ft	105			
109347	342.2 to 343.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109366	343.9 to 344.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
109367	344.9 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
109377	348.4 to 378.7 feet	Key Note Segment		5 ft	152			
109348	377.2 to 378.2 feet	**Vertical Change**	-.47"	5 ft	5	REF		
109368	378.9 to 386.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,440**

TOTAL COST FOR: E *side of* **SAN PIETRO DR** *Starting at:* **FRESHET DR** **$40,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261247	SAN PIETRO DR	RUNNING BROOK DR	3455 RUNNING BROOK DR	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109180	4.8 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
109181	29.6 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
109182	51.3 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
109179	85.8 to 88.7 feet	**Vertical Change**	.4"	5 ft	15	LF	$75	**$1,088**

TOTAL COST FOR: E *side of* **SAN PIETRO DR** *Starting at:* **RUNNING BROOK DR** **$43,807.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261321	SAN PIETRO DR	RUNNING BROOK DR	1384 SAN PIETRO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109390	10.0 to 16.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
109410	16.4 to 36.7 feet	Key Note Segment		5 ft	102			
109378	27.1 to 28.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
109411	45.6 to 64.3 feet	Key Note Segment		5 ft	94			
109379	60.8 to 61.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
109391	84.3 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
109380	98.4 to 99.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109392	104.3 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109393	114.5 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
109412	123.4 to 142.8 feet	Key Note Segment		5 ft	97			
109381	134.1 to 135.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
109382	143.6 to 144.6 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
109394	145.0 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109395	149.9 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
109413	152.3 to 171.3 feet	Key Note Segment		5 ft	95			
109383	161.6 to 162.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109396	190.0 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
109397	202.3 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109398	218.3 to 221.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
109414	223.9 to 251.5 feet	Key Note Segment		5 ft	138			
109384	256.3 to 257.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
109415	257.8 to 286.1 feet	Key Note Segment		5 ft	142			
109385	269.0 to 270.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
109399	295.5 to 296.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109387	321.0 to 322.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
109400	325.4 to 327.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109401	336.5 to 337.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109388	337.2 to 338.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261321	SAN PIETRO DR	RUNNING BROOK DR	1384 SAN PIETRO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109416	338.0 to 357.5 feet	Key Note Segment		5 ft	98			
109402	358.4 to 359.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
109403	360.1 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
109417	366.2 to 385.3 feet	Key Note Segment		5 ft	96			
109404	388.8 to 390.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
109405	396.5 to 400.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
109406	416.1 to 417.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
109407	422.9 to 427.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
109408	431.3 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109418	437.3 to 465.0 feet	Key Note Segment		5 ft	139			
109389	448.0 to 449.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
109409	465.6 to 466.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **SAN PIETRO DR** *Starting at:* **RUNNING BROOK DR** **$42,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201442	SAN RAMON AVE	LEMON AVE	VALENCIA AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105993	18.8 to 38.6 feet	Key Note Segment		5 ft	99			
105977	19.9 to 20.9 feet	Vertical Change	1.02"	5 ft	5	REF		
105978	29.2 to 30.2 feet	Vertical Change	.32"	5 ft	5	REF		
105979	38.7 to 39.7 feet	Vertical Change	1.13"	5 ft	5	REF		
105986	42.3 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
105987	52.4 to 59.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
105988	65.3 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
105994	66.5 to 85.9 feet	Key Note Segment		5 ft	97			
105995	94.1 to 113.9 feet	Key Note Segment		5 ft	99			
105989	115.1 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
105980	136.5 to 137.5 feet	Vertical Change	3.44"	5 ft	5	SF	$75	**$375**
105981	138.8 to 139.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
105982	156.0 to 157.0 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
105996	162.3 to 181.2 feet	Key Note Segment		5 ft	94			
105990	183.7 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
105997	189.4 to 208.3 feet	Key Note Segment		5 ft	95			
105983	190.0 to 191.0 feet	Vertical Change	.42"	5 ft	5	REF		
105984	208.5 to 209.5 feet	Vertical Change	.42"	5 ft	5	REF		
105991	209.3 to 210.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
105992	225.7 to 251.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
105985	243.7 to 244.7 feet	Vertical Change	.67"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SAN RAMON AVE** *Starting at:* **LEMON AVE** **$27,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201428	SAN RAMON AVE	VALENCIA AVE	LEMON AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105851	2.3 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
105852	8.7 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
105853	17.7 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
105865	22.0 to 41.5 feet	Key Note Segment		5 ft	98			
105823	34.9 to 35.9 feet	**Vertical Change**	.56"	5 ft	5	REF		
105824	39.3 to 40.3 feet	**Vertical Change**	1.49"	5 ft	5	REF		
105854	42.5 to 53.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,260**
105825	50.6 to 51.6 feet	**Vertical Change**	1.75"	5 ft	5	REF		
105826	55.2 to 56.2 feet	**Vertical Change**	1.97"	5 ft	5	SF	$75	**$375**
105827	58.6 to 59.6 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
105828	61.9 to 62.9 feet	**Vertical Change**	2.8"	5 ft	5	REF		
105855	62.4 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
105829	64.2 to 65.2 feet	**Vertical Change**	2.38"	5 ft	5	REF		
105866	68.9 to 88.8 feet	Key Note Segment		5 ft	99			
105830	69.3 to 70.3 feet	**Vertical Change**	.63"	5 ft	5	REF		
105831	74.9 to 75.9 feet	**Vertical Change**	3.3"	5 ft	5	REF		
105832	77.9 to 78.9 feet	**Vertical Change**	1.02"	5 ft	5	REF		
105833	80.2 to 81.2 feet	**Vertical Change**	1.6"	5 ft	5	REF		
105856	89.8 to 95.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
105867	96.2 to 116.5 feet	Key Note Segment		5 ft	102			
105834	96.8 to 97.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
105835	106.6 to 107.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
105836	116.1 to 117.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
105857	117.6 to 118.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
105858	118.6 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
105837	137.3 to 138.3 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
105859	144.3 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
105860	152.5 to 162.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201428	SAN RAMON AVE	VALENCIA AVE	LEMON AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105868	163.4 to 182.8 feet	Key Note Segment		5 ft	97			
105839	164.0 to 165.0 feet	Vertical Change	.51"	5 ft	5	REF		
105840	173.7 to 174.7 feet	Vertical Change	-.35"	5 ft	5	REF		
105841	183.2 to 184.2 feet	Vertical Change	.79"	5 ft	5	REF		
105869	190.3 to 210.9 feet	Key Note Segment		5 ft	103			
105842	201.4 to 202.4 feet	Vertical Change	.38"	5 ft	5	REF		
105861	212.3 to 219.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
105843	222.9 to 223.9 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
105870	238.8 to 259.1 feet	Key Note Segment		5 ft	102			
105844	259.1 to 260.1 feet	Vertical Change	.28"	5 ft	5	REF		
105862	259.7 to 269.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
105872	260.7 to 261.7 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
105845	270.1 to 271.1 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
105863	272.4 to 275.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
105864	275.2 to 278.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
105846	279.7 to 280.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
105847	289.2 to 290.2 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
105871	294.3 to 315.5 feet	Key Note Segment		5 ft	106			
105848	305.6 to 306.6 feet	Vertical Change	-.31"	5 ft	5	REF		
105849	311.2 to 312.2 feet	Vertical Change	.55"	5 ft	5	REF		
105850	315.9 to 316.9 feet	Vertical Change	1.03"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAN RAMON AVE** *Starting at:* **VALENCIA AVE** **$50,344.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091257	SAN SEBASTIAN WAY	1250 SAN SEBASTIAN WAY	LAGUNA WAY	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129804	1.5 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
129801	4.2 to 5.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129805	4.3 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
129809	5.8 to 19.1 feet	Key Note Segment		5 ft	67			
129802	14.8 to 15.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
129806	20.1 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
129803	28.7 to 29.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
129807	30.8 to 33.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
129810	32.0 to 33.0 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
129808	38.6 to 40.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
129811	47.8 to 49.0 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **SAN SEBASTIAN WAY** *Starting at:* **1250 SAN SEBASTIAN WAY** **$6,654.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091307	SAN SEBASTIAN WAY	BILBAO CT	TOLEDO WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129959	0.4 to 3.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
129960	9.2 to 14.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
129961	17.0 to 23.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
129962	23.6 to 26.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
129963	28.3 to 29.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
129964	31.2 to 44.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,160**
129965	47.3 to 53.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
129966	55.2 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
129974	58.5 to 67.4 feet	Key Note Segment		5 ft	45			
129967	67.4 to 69.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$380**
129968	73.2 to 74.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
129969	74.8 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,900**
129955	75.2 to 76.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129956	81.2 to 82.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
129970	105.6 to 110.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
129971	110.6 to 122.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
129972	124.0 to 133.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
129973	139.9 to 158.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,280**
129958	159.8 to 160.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SAN SEBASTIAN WAY** *Starting at:* **BILBAO CT** **$68,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091300	SAN SEBASTIAN WAY	LAGUNA WAY	BILBAO CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129825	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129826	1.3 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
129827	6.3 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
129828	13.4 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
129829	20.6 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
129812	27.9 to 28.9 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
129862	29.1 to 42.9 feet	Key Note Segment		5 ft	69			
129830	43.9 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
129831	52.3 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
129863	54.8 to 69.8 feet	Key Note Segment		5 ft	75			
129813	64.6 to 65.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129832	70.3 to 71.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$260**
129814	72.7 to 73.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
129833	75.9 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
129815	89.2 to 90.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
129834	91.4 to 92.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
129835	95.1 to 96.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
129836	97.6 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
129837	101.2 to 113.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
129866	107.1 to 108.1 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
129838	116.5 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
129816	117.6 to 120.7 feet	**Vertical Change**	-.32"	5 ft	16	REF		
129839	124.8 to 126.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
129840	129.3 to 130.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
129817	130.2 to 131.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
129841	135.2 to 138.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
129864	138.0 to 152.0 feet	Key Note Segment		5 ft	70			
129842	153.8 to 154.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091300	SAN SEBASTIAN WAY	LAGUNA WAY	BILBAO CT	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129843	155.8 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
129844	158.9 to 164.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
129845	167.3 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
129846	177.4 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
129847	188.2 to 192.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
129848	194.4 to 196.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
129849	199.8 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
129850	228.1 to 235.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
129851	235.3 to 236.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
129852	239.6 to 248.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
129853	252.8 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
129865	258.7 to 273.6 feet	Key Note Segment		5 ft	75			
129854	274.3 to 278.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
129855	278.1 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
129856	284.8 to 314.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
129819	290.5 to 291.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
129820	296.6 to 297.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
129821	322.2 to 325.1 feet	**Vertical Change**	.27"	5 ft	15	REF		
129857	322.4 to 326.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
129858	329.8 to 331.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
129859	334.6 to 340.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
129822	340.8 to 341.8 feet	**Vertical Change**	1.32"	5 ft	5	SF	$75	**$375**
129860	344.6 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
129823	348.4 to 349.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
129861	348.7 to 359.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
129824	361.4 to 364.3 feet	**Vertical Change**	.33"	5 ft	15	LF	$75	**$1,088**

TOTAL COST FOR: E *side of* **SAN SEBASTIAN WAY** *Starting at:* **LAGUNA WAY** **$117,946.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091255	SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129717	0.3 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
129718	3.2 to 27.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
129672	9.8 to 10.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129784	27.2 to 40.2 feet	Key Note Segment		5 ft	65			
129719	41.4 to 43.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
129673	41.5 to 42.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
129720	43.9 to 45.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
129721	47.9 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
129785	53.3 to 67.0 feet	Key Note Segment		5 ft	69			
129674	62.1 to 63.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
129722	67.3 to 68.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	8	SF	$40	**$300**
129675	68.3 to 69.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
129676	70.6 to 73.8 feet	**Vertical Change**	.28"	5 ft	16	LF	$75	**$1,200**
129723	72.1 to 81.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
129678	81.5 to 82.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
129724	85.5 to 87.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
129725	91.3 to 95.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
129726	97.3 to 101.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
129679	98.9 to 102.9 feet	**Vertical Change**	.27"	5 ft	20	REF		
129727	101.6 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
129728	105.8 to 118.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
129800	108.6 to 109.6 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
129729	120.2 to 124.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
129786	129.3 to 143.8 feet	Key Note Segment		5 ft	73			
129680	130.1 to 131.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129681	134.6 to 135.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129730	144.6 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
129731	148.6 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091255	SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129732	151.9 to 153.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
129787	156.3 to 171.1 feet	Key Note Segment		5 ft	74			
129682	161.7 to 162.7 feet	**Vertical Change**	.6"	5 ft	5	REF		
129733	171.7 to 172.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
129734	177.3 to 192.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
129683	189.2 to 190.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
129735	194.1 to 200.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
129684	196.0 to 197.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
129736	203.8 to 211.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
129686	204.5 to 205.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
129737	213.6 to 223.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
129788	233.9 to 247.3 feet	Key Note Segment		5 ft	67			
129687	234.9 to 235.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
129738	247.3 to 250.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	15	SF	$40	**$600**
129688	247.8 to 248.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
129739	251.1 to 259.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
129689	251.9 to 252.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129690	258.2 to 259.2 feet	**Vertical Change**	-.53"	5 ft	5	REF		
129789	260.2 to 274.5 feet	Key Note Segment		5 ft	72			
129691	260.4 to 263.7 feet	**Vertical Change**	.39"	5 ft	17	REF		
129692	273.4 to 274.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
129740	274.5 to 275.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$260**
129693	279.5 to 280.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
129741	280.7 to 282.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129742	285.8 to 287.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
129694	289.7 to 290.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
129743	292.0 to 309.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
129695	305.9 to 306.9 feet	**Vertical Change**	.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091255	SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129696	313.2 to 314.2 feet	Vertical Change	-.32"	5 ft	5	REF		
129744	313.3 to 314.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
129745	320.8 to 323.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,860
129697	325.6 to 326.6 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
129698	332.0 to 333.0 feet	Vertical Change	1.68"	5 ft	5	SF	$75	$375
129746	333.7 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
129790	336.8 to 351.8 feet	Key Note Segment		5 ft	75			
129699	336.9 to 337.9 feet	Vertical Change	.27"	5 ft	5	REF		
129700	345.5 to 346.5 feet	Vertical Change	.82"	5 ft	5	REF		
129747	352.4 to 363.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	55	SF	$40	$2,180
129701	355.3 to 356.3 feet	Vertical Change	.26"	5 ft	5	REF		
129702	362.5 to 365.4 feet	Vertical Change	.46"	5 ft	15	REF		
129791	363.6 to 377.5 feet	Key Note Segment		5 ft	70			
129748	377.5 to 380.3 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	14	SF	$40	$560
129749	380.5 to 393.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	$7,680
129703	382.8 to 386.0 feet	Vertical Change	.28"	5 ft	16	REF		
129750	394.0 to 395.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780
129751	395.8 to 405.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	$5,700
129704	399.3 to 400.3 feet	Vertical Change	3.05"	5 ft	5	REF		
129752	405.8 to 411.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
129753	412.3 to 415.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	$1,860
129754	417.8 to 425.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	$4,380
129755	427.7 to 429.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
129756	429.4 to 430.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
129757	436.1 to 440.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
129792	440.8 to 455.0 feet	Key Note Segment		5 ft	71			
129758	457.3 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
129705	462.3 to 463.3 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091255	SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129793	466.3 to 480.8 feet	Key Note Segment		5 ft	73			
129706	471.6 to 472.6 feet	Vertical Change	.37"	5 ft	5	REF		
129707	475.7 to 476.7 feet	Vertical Change	-.27"	5 ft	5	REF		
129759	480.9 to 483.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	**$420**
129760	487.5 to 490.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
129761	497.3 to 515.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
129708	502.1 to 505.4 feet	Vertical Change	-.29"	5 ft	17	REF		
129709	508.6 to 509.6 feet	Vertical Change	.42"	5 ft	5	REF		
129798	514.4 to 515.4 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
129762	516.7 to 528.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
129710	519.6 to 520.6 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
129763	529.1 to 532.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
129711	532.0 to 533.0 feet	Vertical Change	-.34"	5 ft	5	REF		
129764	535.7 to 539.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
129765	542.5 to 544.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
129794	544.2 to 558.4 feet	Key Note Segment		5 ft	71			
129766	562.0 to 565.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
129767	566.1 to 569.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
129768	569.1 to 570.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
129795	570.2 to 584.8 feet	Key Note Segment		5 ft	73			
129712	573.7 to 574.7 feet	Vertical Change	2.89"	5 ft	5	REF		
129769	584.8 to 588.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	19	SF	$40	**$760**
129770	593.7 to 597.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
129771	599.8 to 604.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
129772	607.0 to 610.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
129773	617.3 to 621.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
129774	623.8 to 638.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
129799	640.2 to 641.2 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091255	SAN SEBASTIAN WAY	SEGOVIA WAY	1266 SAN SEBASTIAN WAY	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129775	643.3 to 644.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
129713	646.2 to 647.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
129796	647.3 to 661.3 feet	Key Note Segment		5 ft	70			
129776	667.0 to 670.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
129714	669.2 to 670.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
129777	670.9 to 672.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
129715	672.3 to 673.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
129797	673.8 to 687.4 feet	Key Note Segment		5 ft	68			
129778	689.1 to 690.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
129779	690.1 to 694.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
129780	698.3 to 702.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
129781	704.2 to 718.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
129716	709.5 to 710.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
129782	721.2 to 732.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,480**
129783	732.0 to 744.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**

TOTAL COST FOR: W *side of* **SAN SEBASTIAN WAY** *Starting at:* **SEGOVIA WAY** **$212,878.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091323	SAN SEBASTIAN WAY	TOLEDO WAY	SEGOVIA CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130137	0.0 to 3.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
130126	5.8 to 6.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
130138	6.0 to 7.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
130139	7.8 to 10.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
130140	10.8 to 38.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	139	SF	$120	**$16,680**
130141	38.8 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
130127	40.0 to 41.0 feet	**Vertical Change**	3.18"	5 ft	5	REF		
130128	44.8 to 45.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
130129	55.1 to 56.1 feet	**Vertical Change**	3.44"	5 ft	5	SF	$75	**$375**
130130	57.0 to 58.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
130131	60.3 to 64.9 feet	**Vertical Change**	.4"	5 ft	23	REF		
130142	60.7 to 80.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,940**
130132	71.1 to 72.1 feet	**Vertical Change**	2.94"	5 ft	5	REF		
130143	84.1 to 86.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
130147	86.4 to 96.0 feet	Key Note Segment		5 ft	48			
130144	97.2 to 124.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,560**
130133	106.4 to 107.4 feet	**Vertical Change**	.53"	5 ft	5	REF		
130134	112.9 to 113.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
130145	125.5 to 135.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
130146	136.8 to 158.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,140**
130136	149.7 to 150.7 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SAN SEBASTIAN WAY** *Starting at:* **TOLEDO WAY** **$75,705.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071443	SANARITA CT	1621 SANARITA CT	JERICHO DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124317	0.1 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
124325	2.8 to 24.0 feet	Key Note Segment		5 ft	106			
124311	3.1 to 4.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
124312	23.9 to 24.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
124318	24.3 to 25.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$220**
124319	25.8 to 28.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
124320	29.0 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
124321	34.7 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,820**
124326	54.6 to 75.1 feet	Key Note Segment		5 ft	102			
124313	55.0 to 56.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
124314	65.2 to 66.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
124322	77.2 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
124323	78.3 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
124315	106.5 to 107.5 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
124327	107.5 to 126.6 feet	Key Note Segment		5 ft	96			
124328	120.8 to 121.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
124316	127.6 to 128.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
124324	129.6 to 152.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**

TOTAL COST FOR: N *side of* **SANARITA CT** *Starting at:* **1621 SANARITA CT** **$47,329.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071438	SANARITA CT	1632 SANARITA CT	1651 SANARITA CT	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124298	0.3 to 16.3 feet	Key Note Segment		5 ft	80			
124296	17.1 to 18.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
124297	18.9 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
124295	24.0 to 25.0 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
124299	24.1 to 43.2 feet	Key Note Segment		5 ft	96			

TOTAL COST FOR: S *side of* **SANARITA CT** *Starting at:* **1632 SANARITA CT** **$3,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071441	SANARITA CT	1651 SANARITA CT	1631 SANARITA CT	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124305	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
124309	2.5 to 23.6 feet	Key Note Segment		5 ft	106			
124300	23.8 to 24.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
124306	31.0 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
124310	34.8 to 54.3 feet	Key Note Segment		5 ft	98			
124301	35.1 to 36.1 feet	**Vertical Change**	-.52"	5 ft	5	REF		
124302	55.3 to 56.3 feet	**Vertical Change**	-1"	5 ft	5	SF	$75	**$375**
124303	57.5 to 58.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
124307	58.6 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
124308	74.3 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
124304	87.5 to 88.5 feet	**Vertical Change**	1.01"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **SANARITA CT** *Starting at:* **1651 SANARITA CT** **$15,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071436	SANARITA CT	JERICHO DR	1632 SANARITA CT	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124280	0.0 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,740**
124281	17.9 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
124292	22.9 to 43.4 feet	Key Note Segment		5 ft	103			
124282	47.6 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
124293	49.1 to 69.7 feet	Key Note Segment		5 ft	103			
124274	59.4 to 60.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
124275	70.1 to 71.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
124283	73.2 to 87.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
124277	78.7 to 79.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
124284	87.8 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
124294	100.2 to 121.2 feet	Key Note Segment		5 ft	105			
124278	111.0 to 112.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
124285	121.8 to 122.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
124286	123.7 to 126.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
124287	126.8 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
124288	130.8 to 134.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
124289	137.4 to 142.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
124290	142.5 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
124279	143.0 to 144.0 feet	**Vertical Change**	3.52"	5 ft	5	REF		
124291	147.0 to 171.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$14,940**

TOTAL COST FOR: S *side of* **SANARITA CT** *Starting at:* **JERICHO DR** **$56,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071314	SANARITA WY	1200 SANARITA WY	1204 SANARITA WY	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123687	0.0 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,496**
123688	5.2 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
123690	6.4 to 25.2 feet	Key Note Segment		4 ft	75			
123685	38.2 to 39.2 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
123691	38.7 to 58.8 feet	Key Note Segment		4 ft	80			
123689	81.9 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
123692	85.1 to 102.1 feet	Key Note Segment		4 ft	68			
123686	85.8 to 86.8 feet	**Vertical Change**	.27"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **SANARITA WY** *Starting at:* **1200 SANARITA WY** **$4,908.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071312	SANARITA WY	1205 SANARITA WAY	1200 SANARITA WAY	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123678	0.0 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
123676	7.1 to 8.1 feet	**Vertical Change**	.55"	4 ft	4	REF		
123679	13.1 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,808**
123680	30.0 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
123683	33.1 to 50.7 feet	Key Note Segment		4 ft	70			
123677	51.5 to 55.0 feet	**Vertical Change**	.3"	4 ft	14	LF	$75	**$1,050**
123681	52.6 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
123684	55.2 to 56.2 feet	**Continuous Width**	24"	4 ft	4	SF	$120	**$480**
123682	57.7 to 61.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **SANARITA WY** *Starting at:* **1205 SANARITA WAY** **$18,042.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071321	SANARITA WY	1208 SANARITA WY	JESSE DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123701	0.5 to 16.0 feet	Key Note Segment		4 ft	62			
123693	30.5 to 31.5 feet	**Vertical Change**	.31"	4 ft	4	REF		
123697	30.7 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
123698	38.2 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
123704	47.8 to 48.8 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
123705	58.5 to 59.5 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
123694	60.8 to 61.8 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
123699	63.6 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
123702	76.7 to 93.9 feet	Key Note Segment		4 ft	69			
123695	82.1 to 83.1 feet	**Vertical Change**	3.25"	4 ft	4	REF		
123696	94.1 to 95.1 feet	**Vertical Change**	.28"	4 ft	4	REF		
123703	101.9 to 121.0 feet	Key Note Segment		4 ft	76			
123700	122.1 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	82	SF	$120	**$9,792**

TOTAL COST FOR: S *side of* **SANARITA WY** *Starting at:* **1208 SANARITA WY** **$14,607.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071452	SANARITA WY	DOMINGUEZ DR	JESSE DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124380	3.5 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
124372	10.1 to 11.1 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
124381	12.5 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**
124382	17.3 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
124406	19.6 to 42.8 feet	Key Note Segment		4 ft	93			
124373	20.0 to 21.0 feet	**Vertical Change**	.32"	4 ft	4	REF		
124374	42.8 to 43.8 feet	**Vertical Change**	.32"	4 ft	4	REF		
124383	44.1 to 45.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
124384	46.3 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	112	SF	$120	**$13,440**
124407	77.3 to 95.8 feet	Key Note Segment		4 ft	74			
124385	97.0 to 104.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,408**
124386	104.1 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,072**
124387	112.8 to 118.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,832**
124388	124.2 to 128.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,112**
124408	129.1 to 146.6 feet	Key Note Segment		4 ft	70			
124389	148.3 to 155.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,648**
124390	156.8 to 166.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,800**
124391	168.6 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,856**
124409	181.3 to 198.6 feet	Key Note Segment		4 ft	69			
124375	181.7 to 182.7 feet	**Vertical Change**	-.31"	4 ft	4	REF		
124392	202.1 to 209.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,408**
124393	211.6 to 212.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
124394	213.8 to 224.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
124395	227.0 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
124410	233.1 to 250.2 feet	Key Note Segment		4 ft	68			
124396	254.7 to 258.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
124411	258.9 to 276.1 feet	Key Note Segment		4 ft	69			
124397	278.9 to 289.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,848**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071452	SANARITA WY	DOMINGUEZ DR	JESSE DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124398	292.4 to 305.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,288**
124399	308.0 to 309.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$768**
124400	311.7 to 337.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	102	SF	$120	**$12,192**
124412	337.4 to 355.1 feet	Key Note Segment		4 ft	71			
124401	358.1 to 379.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	84	SF	$120	**$10,128**
124376	373.5 to 374.5 feet	**Vertical Change**	.27"	4 ft	4	REF		
124402	380.3 to 388.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
124377	381.4 to 382.4 feet	**Vertical Change**	.28"	4 ft	4	REF		
124413	389.8 to 407.4 feet	Key Note Segment		4 ft	70			
124403	409.1 to 415.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	25	SF	$120	**$3,024**
124414	415.4 to 431.9 feet	Key Note Segment		4 ft	66			
124378	415.7 to 416.7 feet	**Vertical Change**	-.39"	4 ft	4	REF		
124404	432.4 to 433.4 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	4	SF	$40	**$160**
124405	434.0 to 454.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	83	SF	$120	**$9,984**
124379	454.3 to 455.3 feet	**Vertical Change**	.32"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **SANARITA WY** *Starting at:* **DOMINGUEZ DR** **$110,188.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071432	SANARITA WY	DOMINGUEZ DR	JERICHO DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124243	5.3 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
124244	11.5 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
124231	13.6 to 14.6 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
124245	17.3 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
124266	25.7 to 45.6 feet	Key Note Segment		4 ft	80			
124232	26.7 to 27.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
124246	47.9 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
124267	52.8 to 72.5 feet	Key Note Segment		4 ft	79			
124247	73.1 to 79.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,072**
124248	79.8 to 86.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	25	SF	$120	**$2,976**
124249	86.9 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	154	SF	$120	**$18,432**
124233	109.2 to 110.2 feet	**Vertical Change**	-.76"	4 ft	4	REF		
124250	133.1 to 134.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
124268	134.6 to 153.6 feet	Key Note Segment		4 ft	76			
124234	153.8 to 154.8 feet	**Vertical Change**	1.61"	4 ft	4	REF		
124251	155.9 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
124269	161.0 to 181.1 feet	Key Note Segment		4 ft	80			
124235	181.2 to 182.2 feet	**Vertical Change**	.34"	4 ft	4	REF		
124252	181.9 to 192.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$4,992**
124236	183.4 to 184.4 feet	**Vertical Change**	-.46"	4 ft	4	REF		
124253	195.6 to 210.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	60	SF	$120	**$7,248**
124254	217.2 to 222.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
124255	226.2 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
124256	230.8 to 234.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,584**
124257	234.1 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,128**
124270	243.0 to 262.4 feet	Key Note Segment		4 ft	78			
124238	243.4 to 244.4 feet	**Vertical Change**	.27"	4 ft	4	REF		
124239	253.3 to 254.3 feet	**Vertical Change**	.28"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071432	SANARITA WY	DOMINGUEZ DR	JERICHO DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124258	265.9 to 268.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
124271	269.4 to 289.8 feet	Key Note Segment		4 ft	82			
124240	270.4 to 271.4 feet	**Vertical Change**	-.27"	4 ft	4	REF		
124259	291.3 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,080**
124260	315.5 to 320.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,544**
124261	322.8 to 349.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	108	SF	$120	**$12,912**
124272	350.4 to 369.8 feet	Key Note Segment		4 ft	78			
124262	371.1 to 375.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
124273	376.2 to 397.3 feet	Key Note Segment		4 ft	84			
124241	397.8 to 398.8 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
124263	399.2 to 408.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	36	SF	$120	**$4,320**
124264	408.7 to 412.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
124265	415.5 to 426.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	42	SF	$120	**$5,040**
124242	425.9 to 426.9 feet	**Vertical Change**	.59"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **SANARITA WY** *Starting at:* **DOMINGUEZ DR** **$97,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071448	SANARITA WY	JERICHO DR	DOMINGUEZ DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124345	0.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
124346	14.3 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
124347	19.9 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
124364	24.8 to 44.8 feet	Key Note Segment		5 ft	100			
124329	24.9 to 25.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
124330	35.7 to 36.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
124331	45.5 to 46.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
124348	48.8 to 52.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
124365	53.1 to 72.4 feet	Key Note Segment		5 ft	97			
124332	69.5 to 70.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
124349	73.7 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
124333	75.5 to 76.5 feet	**Vertical Change**	-.42"	5 ft	5	REF		
124350	95.5 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
124335	98.3 to 99.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
124351	103.1 to 134.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,720**
124366	134.8 to 154.4 feet	Key Note Segment		5 ft	98			
124336	135.3 to 136.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
124337	154.2 to 155.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
124352	156.0 to 161.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
124367	161.0 to 181.1 feet	Key Note Segment		5 ft	101			
124338	161.5 to 162.5 feet	**Vertical Change**	2.68"	5 ft	5	REF		
124339	180.7 to 181.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
124353	184.0 to 185.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
124354	186.7 to 193.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
124355	193.0 to 221.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	**$17,340**
124356	222.1 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
124368	243.5 to 262.7 feet	Key Note Segment		5 ft	96			
124357	264.0 to 267.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071448	SANARITA WY	JERICHO DR	DOMINGUEZ DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124369	270.3 to 289.3 feet	Key Note Segment		5 ft	95			
124358	290.1 to 291.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
124359	294.3 to 348.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	273	SF	$120	**$32,700**
124340	309.7 to 310.7 feet	**Vertical Change**	1.82"	5 ft	5	REF		
124370	351.0 to 371.2 feet	Key Note Segment		5 ft	101			
124341	352.4 to 353.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
124360	371.8 to 378.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
124371	378.6 to 397.0 feet	Key Note Segment		5 ft	92			
124342	379.2 to 380.2 feet	**Vertical Change**	-.37"	5 ft	5	REF		
124343	397.7 to 398.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
124361	399.1 to 410.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
124362	412.3 to 416.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
124344	413.3 to 414.3 feet	**Vertical Change**	-.4"	5 ft	5	REF		
124363	419.3 to 424.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: N *side of* **SANARITA WY** *Starting at:* **JERICHO DR** **$129,165.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071427	SANARITA WY	JESSE DR	DOMINGUEZ DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124197	2.1 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
124198	8.9 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,472**
124221	21.1 to 39.2 feet	Key Note Segment		4 ft	72			
124199	41.1 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	63	SF	$120	**$7,584**
124200	60.3 to 71.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,328**
124222	72.5 to 89.5 feet	Key Note Segment		4 ft	68			
124182	75.3 to 76.3 feet	**Vertical Change**	2.23"	4 ft	4	REF		
124201	91.3 to 92.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
124202	93.7 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
124183	96.6 to 97.6 feet	**Vertical Change**	3.26"	4 ft	4	REF		
124223	97.9 to 115.1 feet	Key Note Segment		4 ft	69			
124203	118.6 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
124204	129.8 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**
124205	142.1 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,512**
124206	156.0 to 157.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
124184	156.4 to 159.1 feet	**Vertical Change**	-.26"	4 ft	11	REF		
124230	158.2 to 159.2 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
124207	159.9 to 168.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	35	SF	$120	**$4,224**
124185	160.2 to 168.5 feet	**Vertical Change**	.27"	4 ft	33	REF		
124208	169.3 to 170.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
124186	169.8 to 170.8 feet	**Vertical Change**	-.27"	4 ft	4	REF		
124187	171.5 to 172.5 feet	**Vertical Change**	-.59"	4 ft	4	SF	$75	**$300**
124188	173.5 to 179.1 feet	**Vertical Change**	.3"	4 ft	22	LF	$75	**$1,680**
124209	175.6 to 177.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
124224	177.8 to 193.9 feet	Key Note Segment		4 ft	64			
124189	193.3 to 194.3 feet	**Vertical Change**	3.55"	4 ft	4	REF		
124210	194.6 to 202.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	32	SF	$120	**$3,888**
124211	202.7 to 227.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	99	SF	$120	**$11,856**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202071427	SANARITA WY	JESSE DR	DOMINGUEZ DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
124225	228.3 to 246.4 feet	Key Note Segment		4 ft	72			
124190	231.6 to 232.6 feet	Vertical Change	-.29"	4 ft	4	REF		
124212	248.5 to 271.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,944**
124191	259.2 to 260.2 feet	Vertical Change	.29"	4 ft	4	REF		
124213	277.1 to 279.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
124226	280.3 to 297.8 feet	Key Note Segment		4 ft	70			
124214	299.9 to 301.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
124215	301.2 to 306.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
124227	306.0 to 324.0 feet	Key Note Segment		4 ft	72			
124192	307.3 to 308.3 feet	Vertical Change	-.29"	4 ft	4	REF		
124193	323.0 to 324.0 feet	Vertical Change	.26"	4 ft	4	REF		
124216	336.2 to 343.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
124217	346.1 to 353.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,312**
124218	353.0 to 354.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
124228	383.7 to 401.8 feet	Key Note Segment		4 ft	72			
124194	404.1 to 407.4 feet	Vertical Change	.29"	4 ft	13	LF	$75	**$990**
124219	408.9 to 409.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
124195	410.7 to 411.7 feet	Vertical Change	-.28"	4 ft	4	LF	$75	**$300**
124229	411.3 to 429.6 feet	Key Note Segment		4 ft	73			
124196	429.9 to 430.9 feet	Vertical Change	.3"	4 ft	4	REF		
124220	431.4 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	80	SF	$120	**$9,552**

TOTAL COST FOR: S *side of* **SANARITA WY** *Starting at:* **JESSE DR** **$92,649.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202071311	SANARITA WY	JESSIE DR	1205 SANARITA WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123663	1.0 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
123664	9.8 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,080**
123659	10.6 to 11.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
123673	19.3 to 36.3 feet	Key Note Segment		4 ft	68			
123660	39.1 to 40.1 feet	**Vertical Change**	.5"	4 ft	4	SF	$75	**$300**
123665	43.8 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,752**
123661	44.9 to 45.9 feet	**Vertical Change**	.48"	4 ft	4	REF		
123666	53.7 to 56.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
123667	59.7 to 70.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	43	SF	$120	**$5,184**
123674	72.3 to 90.3 feet	Key Note Segment		4 ft	72			
123668	93.6 to 117.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	94	SF	$120	**$11,280**
123669	119.7 to 122.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
123675	124.8 to 143.1 feet	Key Note Segment		4 ft	73			
123662	125.0 to 126.0 feet	**Vertical Change**	.46"	4 ft	4	REF		
123670	144.5 to 145.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$480**
123671	146.4 to 149.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,248**
123672	150.1 to 154.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	16	SF	$120	**$1,968**

TOTAL COST FOR: N *side of* **SANARITA WY** *Starting at:* **JESSIE DR** **$33,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121539	SAND DOLLAR CT	702 SAND DOLLAR CT	BAY VIEW DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97223	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
97224	4.8 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
97225	7.1 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
97234	14.1 to 34.0 feet	Key Note Segment		5 ft	100			
97218	24.3 to 25.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
97226	35.3 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
97227	43.5 to 46.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
97228	52.1 to 57.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
97219	54.6 to 55.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
97229	60.3 to 71.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
97235	72.4 to 91.9 feet	Key Note Segment		5 ft	97			
97220	73.6 to 74.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
97221	83.1 to 84.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
97230	93.2 to 118.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	126	SF	$120	**$15,060**
97231	121.7 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
97236	123.8 to 143.0 feet	Key Note Segment		5 ft	96			
97232	144.3 to 154.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
97222	157.9 to 158.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
97233	159.3 to 171.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: W *side of* **SAND DOLLAR CT** *Starting at:* **702 SAND DOLLAR CT** **$51,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121537	SAND DOLLAR CT	BAY VIEW DR	702 SAND DOLLAR CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97172	0.8 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
97206	22.0 to 41.8 feet	Key Note Segment		5 ft	99			
97148	32.2 to 33.2 feet	**Vertical Change**	.67"	5 ft	5	REF		
97173	43.2 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
97174	55.7 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
97151	65.4 to 66.4 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
97175	69.2 to 70.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
97207	74.8 to 94.4 feet	Key Note Segment		5 ft	98			
97176	96.3 to 107.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
97208	107.1 to 128.3 feet	Key Note Segment		5 ft	106			
97152	111.3 to 112.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
97177	129.1 to 138.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
97178	138.8 to 141.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
97179	142.9 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
97180	155.9 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
97181	162.3 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
97216	165.2 to 166.5 feet		5.0-6.0%	5 ft	7			
97153	169.7 to 170.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
97209	186.3 to 206.3 feet	Key Note Segment		5 ft	100			
97182	208.0 to 210.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
97183	219.2 to 223.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
97210	224.8 to 245.0 feet	Key Note Segment		5 ft	101			
97184	246.3 to 247.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
97154	248.6 to 249.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
97185	254.8 to 261.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
97186	262.1 to 264.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
97187	265.3 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
97188	271.9 to 279.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121537	SAND DOLLAR CT	BAY VIEW DR	702 SAND DOLLAR CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97155	272.1 to 273.1 feet	Vertical Change	-.4"	5 ft	5	REF		
97211	279.8 to 302.8 feet	Key Note Segment		5 ft	115			
97189	303.3 to 305.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	$360
97156	310.2 to 311.2 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
97190	321.7 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
97212	324.8 to 345.5 feet	Key Note Segment		5 ft	104			
97157	335.6 to 336.6 feet	Vertical Change	.27"	5 ft	5	REF		
97191	351.8 to 356.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
97192	360.4 to 362.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
97158	361.3 to 362.3 feet	Vertical Change	-.29"	5 ft	5	REF		
97193	364.8 to 376.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
97159	367.3 to 368.3 feet	Vertical Change	.27"	5 ft	5	REF		
97194	381.3 to 391.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
97195	393.5 to 396.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
97160	395.5 to 396.5 feet	Vertical Change	-.54"	5 ft	5	REF		
97196	399.8 to 404.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
97197	404.6 to 406.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
97213	414.5 to 434.4 feet	Key Note Segment		5 ft	100			
97161	425.9 to 426.9 feet	Vertical Change	.43"	5 ft	5	REF		
97162	436.3 to 437.3 feet	Vertical Change	-.46"	5 ft	5	LF	$75	$375
97217	437.3 to 439.0 feet		5.0-6.0%	5 ft	9			
97163	441.0 to 442.0 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
97198	449.2 to 452.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
97164	455.3 to 456.3 feet	Vertical Change	.75"	5 ft	5	SF	$75	$375
97165	458.5 to 459.5 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
97199	462.7 to 467.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
97214	468.0 to 489.8 feet	Key Note Segment		5 ft	109			
97166	470.5 to 471.5 feet	Vertical Change	2.24"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E/N/W	2201121537	SAND DOLLAR CT	BAY VIEW DR	702 SAND DOLLAR CT	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97200	490.3 to 493.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	**$660**
97201	496.7 to 500.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
97215	500.8 to 520.8 feet	Key Note Segment		5 ft	100			
97167	511.1 to 512.1 feet	Vertical Change	-.26"	5 ft	5	REF		
97202	524.3 to 534.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
97203	534.6 to 535.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97168	538.2 to 539.2 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
97169	540.0 to 541.0 feet	Vertical Change	.82"	5 ft	5	REF		
97204	540.3 to 564.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
97170	549.4 to 550.4 feet	Vertical Change	-.3"	5 ft	5	REF		
97171	564.0 to 565.0 feet	Vertical Change	-.47"	5 ft	5	REF		
97205	567.2 to 570.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**

TOTAL COST FOR: E/N/W *side of* **SAND DOLLAR CT** *Starting at:* **BAY VIEW DR** **$133,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160924	SANDALWOOD DR	GRANADA DR	GREENWOOD DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69516	0.3 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
69517	3.9 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
69518	15.9 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
69519	23.3 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
69520	35.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
69521	68.8 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
69503	73.0 to 74.0 feet	**Vertical Change**	3.24"	5 ft	5	REF		
69522	80.9 to 82.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
69523	83.5 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
69524	90.1 to 91.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
69525	91.6 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
69566	95.0 to 108.4 feet	Key Note Segment		5 ft	67			
69526	110.9 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
69527	119.8 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
69528	131.2 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
69504	138.7 to 139.7 feet	**Vertical Change**	1.97"	5 ft	5	SF	$75	**$375**
69529	144.3 to 150.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,540**
69505	147.2 to 148.2 feet	**Vertical Change**	.51"	5 ft	5	REF		
69530	150.2 to 151.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
69531	152.2 to 158.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
69506	160.2 to 161.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
69567	163.9 to 181.5 feet	Key Note Segment		5 ft	88			
69507	170.9 to 171.9 feet	**Vertical Change**	1.21"	5 ft	5	REF		
69532	181.8 to 182.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
69508	182.9 to 183.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
69509	189.4 to 190.4 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
69533	217.9 to 225.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
69534	237.2 to 241.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160924	SANDALWOOD DR	GRANADA DR	GREENWOOD DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69535	243.8 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
69568	249.4 to 263.8 feet	Key Note Segment		5 ft	72			
69536	264.7 to 266.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
69537	266.5 to 270.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
69538	279.5 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
69569	283.7 to 298.3 feet	Key Note Segment		5 ft	73			
69539	298.3 to 301.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	**$700**
69510	298.8 to 299.8 feet	Vertical Change	-.26"	5 ft	5	REF		
69540	304.8 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
69541	324.4 to 331.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
69542	331.2 to 336.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
69543	338.1 to 347.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
69511	346.8 to 347.8 feet	Vertical Change	.46"	5 ft	5	REF		
69544	355.4 to 364.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
69570	364.7 to 378.8 feet	Key Note Segment		5 ft	71			
69512	366.1 to 367.1 feet	Vertical Change	-.38"	5 ft	5	REF		
69545	379.8 to 382.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
69546	385.6 to 393.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
69571	393.9 to 407.8 feet	Key Note Segment		5 ft	70			
69547	408.0 to 425.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	85	SF	$40	**$3,400**
69548	425.0 to 428.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
69549	430.5 to 432.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
69550	433.8 to 438.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
69551	438.5 to 439.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
69513	440.6 to 441.6 feet	Vertical Change	.58"	5 ft	5	REF		
69552	440.8 to 442.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
69572	444.5 to 458.1 feet	Key Note Segment		5 ft	68			
69553	458.1 to 460.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	11	SF	$40	**$420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2109160924	SANDALWOOD DR	GRANADA DR	GREENWOOD DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69554	464.7 to 476.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
69555	479.3 to 485.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
69556	485.1 to 493.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
69557	494.3 to 506.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
69558	506.8 to 527.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
69514	512.4 to 513.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
69573	527.7 to 541.9 feet	Key Note Segment		5 ft	71			
69559	542.4 to 554.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	62	SF	$40	**$2,460**
69574	556.2 to 568.5 feet	Key Note Segment		5 ft	61			
69560	568.5 to 569.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
69561	571.1 to 574.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
69562	578.9 to 599.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,540**
69563	599.8 to 611.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
69564	611.5 to 615.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
69515	642.7 to 643.7 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
69565	651.7 to 673.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**

TOTAL COST FOR: NE *side of* **SANDALWOOD DR** *Starting at:* **GRANADA DR** **$193,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160918	SANDALWOOD DR	GREENWOOD DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69437	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69438	3.5 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
69439	5.0 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
69421	32.7 to 33.7 feet	Vertical Change	1.93"	5 ft	5	SF	$75	**$375**
69440	34.3 to 37.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
69441	41.1 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
69422	42.6 to 43.6 feet	Vertical Change	-.41"	5 ft	5	REF		
69423	51.2 to 52.2 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
69491	66.9 to 90.3 feet	Key Note Segment		5 ft	117			
69425	82.1 to 83.1 feet	Vertical Change	-.32"	5 ft	5	REF		
69426	92.6 to 93.6 feet	Vertical Change	.43"	5 ft	5	LF	$75	**$375**
69442	94.6 to 95.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
69492	101.5 to 115.8 feet	Key Note Segment		5 ft	72			
69443	116.3 to 118.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	13	SF	$40	**$520**
69427	117.0 to 118.0 feet	Vertical Change	.42"	5 ft	5	REF		
69444	129.7 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69445	134.3 to 168.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,640**
69428	148.2 to 149.2 feet	Vertical Change	.3"	5 ft	5	REF		
69446	168.7 to 178.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
69429	178.3 to 179.3 feet	Vertical Change	.31"	5 ft	5	REF		
69493	178.4 to 191.8 feet	Key Note Segment		5 ft	67			
69447	193.0 to 195.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
69448	195.3 to 199.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
69449	199.6 to 206.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
69494	212.6 to 225.5 feet	Key Note Segment		5 ft	65			
69450	226.0 to 228.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	**$500**
69430	226.8 to 227.8 feet	Vertical Change	-.73"	5 ft	5	REF		
69451	231.3 to 241.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160918	SANDALWOOD DR	GREENWOOD DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69452	245.2 to 246.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
69453	246.7 to 247.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
69454	247.7 to 250.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
69455	251.8 to 252.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
69431	252.4 to 253.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
69456	259.8 to 262.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
69495	262.1 to 277.0 feet	Key Note Segment		5 ft	74			
69457	277.3 to 303.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	131	SF	$40	**$5,240**
69432	293.2 to 294.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
69458	303.7 to 310.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
69433	306.3 to 307.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
69459	311.3 to 322.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
69496	322.7 to 335.8 feet	Key Note Segment		5 ft	66			
69460	335.8 to 351.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	80	SF	$40	**$3,180**
69461	353.0 to 376.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
69497	377.4 to 389.9 feet	Key Note Segment		5 ft	63			
69462	396.0 to 400.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
69463	404.9 to 409.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
69464	412.8 to 415.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
69465	419.3 to 422.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
69466	422.8 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
69467	455.5 to 458.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
69498	458.6 to 471.0 feet	Key Note Segment		5 ft	62			
69468	471.0 to 473.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
69469	473.3 to 476.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
69470	477.8 to 480.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
69471	482.6 to 486.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
69499	486.7 to 500.4 feet	Key Note Segment		5 ft	69			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2109160918	SANDALWOOD DR	GREENWOOD DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69434	499.4 to 500.4 feet	Vertical Change	.46"	5 ft	5	REF		
69472	501.3 to 503.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
69473	503.1 to 504.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
69474	507.0 to 508.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
69475	509.9 to 511.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
69476	514.8 to 524.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
69477	524.8 to 528.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
69478	530.9 to 534.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
69479	535.3 to 539.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
69480	539.3 to 541.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
69500	541.9 to 555.7 feet	Key Note Segment		5 ft	69			
69481	555.7 to 570.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	74	SF	$40	**$2,960**
69482	573.3 to 575.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
69435	573.6 to 574.6 feet	Vertical Change	.35"	5 ft	5	REF		
69436	576.7 to 577.7 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
69501	607.3 to 621.1 feet	Key Note Segment		5 ft	69			
69483	622.1 to 623.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
69484	627.3 to 633.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
69485	633.4 to 635.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69502	636.5 to 648.3 feet	Key Note Segment		5 ft	59			
69486	652.5 to 673.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
69487	674.1 to 680.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
69488	680.7 to 694.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
69489	713.8 to 727.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
69490	728.8 to 731.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: SW *side of* **SANDALWOOD DR** *Starting at:* **GREENWOOD DR** **$186,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211311	SANTA BONITA ST	117 SANTA BONITA ST	OLIVE AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106091	14.8 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
106106	16.7 to 41.5 feet	Key Note Segment		4 ft	99			
106080	21.1 to 22.1 feet	**Vertical Change**	.28"	4 ft	4	REF		
106081	41.1 to 42.1 feet	**Vertical Change**	.63"	4 ft	4	REF		
106082	47.9 to 48.9 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
106092	49.7 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
106107	64.8 to 83.8 feet	Key Note Segment		4 ft	76			
106083	65.4 to 66.4 feet	**Vertical Change**	.37"	4 ft	4	REF		
106084	74.9 to 75.9 feet	**Vertical Change**	.33"	4 ft	4	REF		
106085	83.3 to 84.3 feet	**Vertical Change**	-.26"	4 ft	4	REF		
106093	88.1 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,160**
106094	105.3 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
106108	107.8 to 127.8 feet	Key Note Segment		4 ft	80			
106086	129.3 to 132.3 feet	**Vertical Change**	-.46"	4 ft	12	REF		
106095	129.6 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
106096	134.0 to 148.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	59	SF	$120	**$7,056**
106097	148.7 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
106098	154.3 to 164.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	41	SF	$120	**$4,896**
106109	166.4 to 187.7 feet	Key Note Segment		4 ft	85			
106087	187.8 to 188.8 feet	**Vertical Change**	-.4"	4 ft	4	REF		
106088	196.3 to 197.3 feet	**Vertical Change**	.44"	4 ft	4	LF	$75	**$300**
106099	199.5 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
106110	205.3 to 240.3 feet	Key Note Segment		4 ft	140			
106089	206.6 to 207.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
106111	240.3 to 242.0 feet		5.0-6.0%	4 ft	7			
106090	240.7 to 241.7 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
106100	242.2 to 245.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,728**
106101	246.1 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211311	SANTA BONITA ST	117 SANTA BONITA ST	OLIVE AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106102	254.4 to 260.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
106103	266.5 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
106104	271.0 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
106105	275.6 to 296.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,080**

TOTAL COST FOR: E *side of* **SANTA BONITA ST** *Starting at:* **117 SANTA BONITA ST** **$42,996.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211307	SANTA BONITA ST	205 SANTA BONITA ST	127 SANTA BONITA ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106061	0.7 to 4.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
106062	4.6 to 10.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	**$1,080**
106063	19.4 to 22.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	13	SF	$40	**$520**
106064	25.0 to 30.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	26	SF	$40	**$1,040**
106065	33.5 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
106049	40.6 to 41.6 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
106066	45.0 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
106050	46.1 to 47.1 feet	Vertical Change	1.35"	5 ft	5	REF		
106077	58.3 to 75.5 feet	Key Note Segment		5 ft	86			
106051	74.9 to 75.9 feet	Vertical Change	-.31"	5 ft	5	REF		
106067	80.4 to 84.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
106052	80.6 to 81.6 feet	Vertical Change	.32"	5 ft	5	REF		
106078	85.6 to 104.4 feet	Key Note Segment		5 ft	94			
106068	106.3 to 116.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
106069	116.6 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
106070	125.8 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
106053	137.2 to 138.2 feet	Vertical Change	-.37"	5 ft	5	REF		
106079	141.8 to 159.7 feet	Key Note Segment		5 ft	89			
106055	159.8 to 160.8 feet	Vertical Change	-.33"	5 ft	5	REF		
106071	161.2 to 162.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
106072	162.4 to 188.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
106073	190.3 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
106056	199.7 to 200.7 feet	Vertical Change	.52"	5 ft	5	REF		
106074	204.8 to 222.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,680**
106057	209.5 to 210.5 feet	Vertical Change	.35"	5 ft	5	REF		
106058	218.1 to 219.1 feet	Vertical Change	3.14"	5 ft	5	REF		
106075	223.6 to 251.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
106059	237.3 to 238.3 feet	Vertical Change	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211307	SANTA BONITA ST	205 SANTA BONITA ST	127 SANTA BONITA ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106060	245.5 to 246.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
106076	257.6 to 258.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: E *side of* **SANTA BONITA ST** *Starting at:* **205 SANTA BONITA ST** **$86,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210911	SANTA BONITA ST	ALMOND AVE	CHIANTI CT	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78217	1.8 to 3.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
78218	4.3 to 6.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
78219	7.8 to 11.9 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	21	SF	$120	**$2,460**
78220	12.3 to 14.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
78216	12.5 to 13.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
78221	14.9 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
78222	20.3 to 32.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
78223	32.8 to 37.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
78224	37.3 to 64.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	134	SF	$120	**$16,020**
78225	69.8 to 77.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
78226	76.0 to 77.0 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: E *side of* **SANTA BONITA ST** *Starting at:* **ALMOND AVE** **$38,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210919	SANTA BONITA ST	CHIANTI CT	DEERWOOD DR	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78267	0.7 to 8.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
78268	8.8 to 35.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	131	SF	$120	**$15,780**
78269	35.3 to 77.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	209	SF	$120	**$25,080**
78264	51.0 to 52.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
78265	63.9 to 64.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
78270	77.5 to 97.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
78271	98.0 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
78266	102.9 to 103.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
78272	106.1 to 114.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
78273	114.9 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
78274	122.3 to 134.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
78275	136.9 to 147.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: E *side of* **SANTA BONITA ST** *Starting at:* **CHIANTI CT** **$84,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210925	SANTA BONITA ST	DEERWOOD DR	EL MONTE ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78291	0.0 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
78292	6.7 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
78293	11.0 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
78294	26.9 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
78295	31.9 to 38.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
78296	40.5 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
78330	46.7 to 67.0 feet	Key Note Segment		5 ft	102			
78297	67.1 to 71.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	24	SF	$40	**$960**
78331	73.3 to 94.3 feet	Key Note Segment		5 ft	105			
78298	95.9 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
78283	97.7 to 98.7 feet	**Vertical Change**	.8"	5 ft	5	REF		
78299	101.8 to 126.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	122	SF	$120	**$14,640**
78300	129.2 to 130.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
78301	134.7 to 150.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
78332	151.0 to 171.6 feet	Key Note Segment		5 ft	103			
78284	152.1 to 153.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
78302	172.3 to 176.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	19	SF	$40	**$760**
78333	176.8 to 197.0 feet	Key Note Segment		5 ft	101			
78285	188.5 to 189.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
78303	198.5 to 208.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
78304	208.7 to 223.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
78305	223.5 to 225.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
78286	223.9 to 224.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
78306	226.2 to 227.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
78307	229.3 to 238.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
78308	244.4 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
78334	255.3 to 276.2 feet	Key Note Segment		5 ft	105			
78287	255.9 to 256.9 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210925	SANTA BONITA ST	DEERWOOD DR	EL MONTE ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78288	264.7 to 265.7 feet	Vertical Change	.52"	5 ft	5	REF		
78309	276.3 to 280.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	$900
78335	280.8 to 301.4 feet	Key Note Segment		5 ft	103			
78310	301.4 to 306.5 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	26	SF	$40	$1,020
78311	306.5 to 309.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
78312	309.2 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060
78313	317.0 to 352.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	179	SF	$120	$21,420
78289	340.9 to 341.9 feet	Vertical Change	-.35"	5 ft	5	REF		
78336	352.7 to 374.0 feet	Key Note Segment		5 ft	107			
78314	374.2 to 378.4 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	21	SF	$40	$840
78315	378.8 to 381.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
78337	381.3 to 401.1 feet	Key Note Segment		5 ft	99			
78316	404.1 to 427.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	$13,980
78290	414.2 to 415.2 feet	Vertical Change	.43"	5 ft	5	REF		
78317	428.1 to 435.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
78318	435.3 to 436.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
78319	439.8 to 441.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
78320	441.6 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
78321	446.8 to 453.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
78322	453.7 to 457.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
78338	458.7 to 479.9 feet	Key Note Segment		5 ft	106			
78323	480.3 to 485.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	26	SF	$40	$1,040
78339	485.5 to 505.9 feet	Key Note Segment		5 ft	102			
78324	506.3 to 518.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	62	SF	$40	$2,460
78325	518.8 to 531.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380
78326	533.8 to 562.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	145	SF	$120	$17,400
78340	562.8 to 583.3 feet	Key Note Segment		5 ft	103			
78327	584.4 to 588.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	$2,520

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210925	SANTA BONITA ST	DEERWOOD DR	EL MONTE ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78341	588.6 to 609.3 feet	Key Note Segment		5 ft	103			
78328	609.4 to 617.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	42	SF	$40	**$1,660**
78329	617.7 to 619.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
78342	643.7 to 644.7 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **SANTA BONITA ST** *Starting at:* **DEERWOOD DR** **$168,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211046	SANTA BONITA ST	DEERWOOD DR	ALMOND AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79008	0.0 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
79009	7.9 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
79010	13.8 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
79026	28.7 to 49.3 feet	Key Note Segment		5 ft	103			
79006	48.1 to 49.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
79011	50.1 to 54.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
79027	56.2 to 76.4 feet	Key Note Segment		5 ft	101			
79012	78.6 to 89.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
79013	89.3 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
79014	96.0 to 108.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
79028	108.7 to 128.8 feet	Key Note Segment		5 ft	101			
79015	130.2 to 134.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
79007	134.9 to 135.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
79016	136.6 to 137.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
79017	140.4 to 155.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,240**
79018	156.7 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79029	159.7 to 180.6 feet	Key Note Segment		5 ft	105			
79019	180.8 to 181.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
79020	186.3 to 198.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
79021	202.4 to 205.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79022	211.3 to 223.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
79023	230.9 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
79030	235.5 to 256.4 feet	Key Note Segment		5 ft	104			
79024	257.4 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
79031	269.8 to 290.4 feet	Key Note Segment		5 ft	103			
79025	292.7 to 321.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	143	SF	$120	**$17,160**

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **DEERWOOD DR** **$91,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211002	SANTA BONITA ST	EL MONTE ST	GAMAY ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78629	0.1 to 19.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
78630	22.3 to 33.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,900**
78626	31.2 to 32.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
78631	33.8 to 47.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	68	SF	$120	**$8,100**
78632	47.4 to 48.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
78633	49.8 to 51.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
78634	51.6 to 56.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
78627	57.0 to 58.0 feet	**Vertical Change**	.79"	5 ft	5	REF		
78635	57.3 to 59.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	11	SF	$120	**$1,320**
78636	60.8 to 68.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	40	SF	$120	**$4,800**
78642	68.6 to 70.1 feet		7.0-8.0%	5 ft	8			
78628	70.0 to 71.0 feet	**Vertical Change**	-.45"	5 ft	5	REF		
78637	70.8 to 71.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$600**
78638	73.3 to 99.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
78639	101.8 to 104.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
78640	107.8 to 125.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
78641	127.2 to 144.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,260**

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **EL MONTE ST** **$75,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211004	SANTA BONITA ST	GAMAY ST	MERLOT AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78644	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
78645	4.8 to 15.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
78646	18.5 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	158	SF	$120	**$18,900**
78647	50.5 to 59.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
78643	53.7 to 54.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
78648	59.3 to 63.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
78649	66.0 to 71.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
78650	77.3 to 82.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
78651	82.8 to 83.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
78652	83.9 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
78653	88.4 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
78654	101.7 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
78655	129.6 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **GAMAY ST** **$72,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211302	SANTA BONITA ST	MAPLE ST	300 SANTA BONITA ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106047	0.9 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106048	2.3 to 26.0 feet	Key Note Segment		5 ft	119			
106045	5.4 to 6.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
106046	29.7 to 30.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **MAPLE ST** **$1,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211042	SANTA BONITA ST	MERLOT AVE	DEERWOOD DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78984	0.1 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
78985	9.7 to 12.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
78986	12.8 to 19.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
78987	22.3 to 25.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
78988	25.8 to 32.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
78989	35.4 to 42.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
78990	47.0 to 75.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	142	SF	$120	**$16,980**
78991	80.2 to 82.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
78992	85.7 to 92.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	32	SF	$120	**$3,780**
78993	93.2 to 97.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
78994	100.4 to 108.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
78995	113.7 to 146.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	**$19,920**

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **MERLOT AVE** **$71,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211336	SANTA BONITA ST	OLIVE AVE	106 SANTA BONITA ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106195	0.3 to 22.3 feet	Key Note Segment		5 ft	110			
106186	5.8 to 6.8 feet	Vertical Change	.35"	5 ft	5	REF		
106188	25.2 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
106189	32.9 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
106196	34.3 to 56.3 feet	Key Note Segment		5 ft	110			
106190	66.3 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
106191	73.3 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
106197	77.6 to 97.8 feet	Key Note Segment		5 ft	101			
106192	99.1 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
106193	123.0 to 124.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
106198	126.3 to 145.7 feet	Key Note Segment		5 ft	97			
106187	126.7 to 127.7 feet	Vertical Change	.81"	5 ft	5	REF		
106194	147.5 to 148.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
106199	149.1 to 150.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **SANTA BONITA ST** *Starting at:* **OLIVE AVE** **$22,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191015	SANTA CLARA ST	209 SANTA CLARA ST	209 SANTA CLARA ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102745	1.8 to 2.8 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
102746	13.4 to 14.4 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
102747	19.4 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: E *side of* **SANTA CLARA ST** *Starting at:* **209 SANTA CLARA ST** **$2,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191017	SANTA CLARA ST	209 SANTA CLARA ST	205 SANTA CLARA ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102748	9.5 to 10.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
102755	18.5 to 35.3 feet	Key Note Segment		5 ft	84			
102750	28.8 to 29.8 feet	**Vertical Change**	-.38"	5 ft	5	REF		
102756	35.3 to 36.6 feet		5.0-6.0%	5 ft	7			
102753	38.4 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
102751	40.8 to 41.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
102754	43.8 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
102752	57.3 to 58.3 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **SANTA CLARA ST** *Starting at:* **209 SANTA CLARA ST** **$9,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110210934	SANTA CLARA ST	EL MONTE ST	GAMAY ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78405	12.2 to 35.5 feet	Key Note Segment		5 ft	117			
78397	40.4 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
78398	59.3 to 79.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,240**
78406	79.7 to 101.2 feet	Key Note Segment		5 ft	108			
78395	99.7 to 100.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
78399	101.8 to 103.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
78400	103.8 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
78401	107.5 to 129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
78396	119.6 to 120.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
78407	131.0 to 152.3 feet	Key Note Segment		5 ft	107			
78402	153.4 to 155.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
78408	156.6 to 177.0 feet	Key Note Segment		5 ft	102			
78403	177.6 to 197.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
78404	197.8 to 203.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: W *side of* **SANTA CLARA ST** *Starting at:* **EL MONTE ST** **$50,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210956	SANTA CLARA ST	GAMAY ST	EL MONTE ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78585	0.3 to 4.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
78586	4.9 to 32.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,440**
78587	32.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
78588	42.0 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
78589	57.4 to 60.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
78590	60.8 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
78591	69.0 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	167	SF	$120	**$19,980**
78592	104.5 to 137.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	163	SF	$120	**$19,620**
78593	139.8 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
78594	142.8 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**

TOTAL COST FOR: E *side of* **SANTA CLARA ST** *Starting at:* **GAMAY ST** **$79,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211348	SANTA CRUZ ST	137 SANTA CRUZ ST	123 SANTA CRUZ ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106249	0.4 to 1.4 feet	Vertical Change	-.63"	5 ft	5	REF		
106261	0.7 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
106250	7.3 to 8.3 feet	Vertical Change	2.67"	5 ft	5	REF		
106251	19.8 to 20.8 feet	Vertical Change	.48"	5 ft	5	REF		
106267	24.8 to 39.7 feet	Key Note Segment		5 ft	75			
106252	27.5 to 28.5 feet	Vertical Change	.31"	5 ft	5	REF		
106262	43.1 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
106270	44.0 to 45.0 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
106253	50.7 to 51.7 feet	Vertical Change	.39"	5 ft	5	REF		
106268	59.6 to 79.1 feet	Key Note Segment		5 ft	97			
106254	60.2 to 61.2 feet	Vertical Change	.31"	5 ft	5	REF		
106255	79.1 to 80.1 feet	Vertical Change	-.28"	5 ft	5	REF		
106263	81.6 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
106264	85.1 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
106269	86.2 to 105.7 feet	Key Note Segment		5 ft	98			
106256	89.7 to 90.7 feet	Vertical Change	-.3"	5 ft	5	REF		
106258	96.7 to 97.7 feet	Vertical Change	.37"	5 ft	5	REF		
106265	107.6 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
106266	111.0 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
106259	113.2 to 114.2 feet	Vertical Change	.32"	5 ft	5	REF		
106260	122.7 to 123.7 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SANTA CRUZ ST** *Starting at:* **137 SANTA CRUZ ST** **$27,474.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211345	SANTA CRUZ ST	201 SANTA CRUZ ST	201 SANTA CRUZ ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106244	5.3 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
106245	11.0 to 12.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
106246	13.3 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
106247	32.4 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
106243	35.0 to 36.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
106248	35.8 to 48.7 feet	Key Note Segment		5 ft	65			

TOTAL COST FOR: E *side of* **SANTA CRUZ ST** *Starting at:* **201 SANTA CRUZ ST** **$15,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201211351	SANTA CRUZ ST	534 OLIVE AVE	OLIVE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106272	6.5 to 8.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
106276	8.9 to 21.3 feet	Key Note Segment		5 ft	62			
106273	33.1 to 35.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
106274	46.9 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
106271	59.8 to 60.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
106275	60.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**

TOTAL COST FOR: E *side of* **SANTA CRUZ ST** *Starting at:* **534 OLIVE AVE** **$22,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110210930	SANTA CRUZ ST	605 EL MONTE ST	EL MONTE ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78372	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
78373	2.3 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
78374	32.3 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
78375	37.6 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
78376	56.2 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
78377	63.3 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
78378	72.8 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **SANTA CRUZ ST** *Starting at:* **605 EL MONTE ST** **$34,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110210929	SANTA CRUZ ST	EL MONTE ST	533 EL MONTE ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78366	0.0 to 14.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
78367	14.1 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
78368	30.3 to 37.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
78369	38.3 to 39.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
78370	41.7 to 47.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
78371	47.8 to 68.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**

TOTAL COST FOR: E *side of* **SANTA CRUZ ST** *Starting at:* **EL MONTE ST** **$36,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211343	SANTA CRUZ ST	OLIVE AVE	714 SANTA BONITA ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106211	0.0 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
106200	2.5 to 3.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
106212	4.8 to 5.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
106213	7.5 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
106214	11.2 to 23.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
106215	28.3 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
106201	35.0 to 36.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
106216	46.9 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
106202	72.2 to 73.2 feet	**Vertical Change**	-.83"	5 ft	5	REF		
106217	80.8 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
106218	84.7 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
106219	92.0 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
106203	104.5 to 105.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
106220	132.3 to 164.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	159	SF	$40	**$6,360**
106221	164.1 to 169.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
106222	172.4 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
106223	191.0 to 208.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
106224	211.0 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
106225	218.8 to 220.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
106226	220.4 to 222.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
106239	222.6 to 239.0 feet	Key Note Segment		5 ft	82			
106227	239.0 to 254.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	77	SF	$40	**$3,060**
106228	256.4 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
106204	271.5 to 272.5 feet	**Vertical Change**	-.44"	5 ft	5	REF		
106205	282.1 to 283.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
106229	283.8 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
106230	294.5 to 297.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
106206	300.6 to 301.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201211343	SANTA CRUZ ST	OLIVE AVE	714 SANTA BONITA ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106231	305.0 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
106207	319.2 to 320.2 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
106208	337.6 to 338.6 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
106232	355.2 to 361.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
106233	365.8 to 381.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
106234	394.3 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,500**
106209	410.6 to 411.6 feet	**Vertical Change**	3.27"	5 ft	5	REF		
106235	430.4 to 436.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
106236	438.9 to 446.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
106240	446.5 to 468.9 feet	Key Note Segment		5 ft	112			
106210	447.2 to 448.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
106237	471.6 to 476.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
106238	476.8 to 493.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
106241	493.7 to 515.4 feet	Key Note Segment		5 ft	109			

TOTAL COST FOR: W *side of* **SANTA CRUZ ST** *Starting at:* **OLIVE AVE** **$165,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101247	SANTA FE CT	1306 SANTA FE CT	ELM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131491	0.0 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
131479	1.7 to 2.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
131507	2.2 to 21.7 feet	Key Note Segment		5 ft	97			
131480	21.8 to 22.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
131492	22.2 to 23.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
131493	23.2 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
131512	31.1 to 32.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
131494	33.7 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
131508	43.4 to 63.4 feet	Key Note Segment		5 ft	100			
131481	63.4 to 64.4 feet	**Vertical Change**	.59"	5 ft	5	REF		
131495	67.5 to 69.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
131496	71.4 to 77.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
131497	79.8 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
131482	80.4 to 81.4 feet	**Vertical Change**	-.63"	5 ft	5	REF		
131498	87.6 to 97.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
131483	97.3 to 98.3 feet	**Vertical Change**	.88"	5 ft	5	REF		
131509	98.7 to 116.8 feet	Key Note Segment		5 ft	91			
131484	107.4 to 108.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
131499	119.0 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
131500	127.8 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
131501	133.8 to 147.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,460**
131485	141.5 to 142.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
131510	149.4 to 168.5 feet	Key Note Segment		5 ft	96			
131486	150.0 to 151.0 feet	**Vertical Change**	-.45"	5 ft	5	REF		
131487	169.0 to 170.0 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
131502	170.8 to 175.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
131488	176.0 to 177.0 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
131511	176.3 to 194.3 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101247	SANTA FE CT	1306 SANTA FE CT	ELM AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131489	185.5 to 186.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
131503	196.1 to 199.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
131504	200.3 to 204.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
131505	204.7 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
131490	206.8 to 207.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
131506	209.9 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**

TOTAL COST FOR: SE *side of* **SANTA FE CT** *Starting at:* **1306 SANTA FE CT** **$58,589.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101245	SANTA FE CT	ELM AVE	1306 SANTA FE CT	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131465	1.2 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
131453	18.8 to 19.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
131474	24.1 to 42.8 feet	Key Note Segment		5 ft	94			
131454	25.3 to 26.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
131455	43.6 to 44.6 feet	**Vertical Change**	-.55"	5 ft	5	SF	$75	**$375**
131466	44.9 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
131456	50.5 to 51.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
131475	50.8 to 69.4 feet	Key Note Segment		5 ft	93			
131457	69.5 to 70.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
131467	71.4 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,680**
131458	88.8 to 89.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
131468	107.4 to 119.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
131459	111.1 to 112.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
131476	119.8 to 138.9 feet	Key Note Segment		5 ft	96			
131460	139.5 to 140.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
131469	141.4 to 142.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
131470	142.6 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
131461	149.4 to 150.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
131471	149.6 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
131477	154.3 to 175.0 feet	Key Note Segment		5 ft	103			
131462	155.5 to 156.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
131463	165.5 to 166.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
131464	175.3 to 176.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
131472	194.3 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
131478	199.3 to 218.8 feet	Key Note Segment		5 ft	98			
131473	224.2 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: NW *side of* **SANTA FE CT** *Starting at:* **ELM AVE** **$53,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101607	SANTA FE ST	ELM AVE	PERCY ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132520	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
132521	2.5 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132522	7.8 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
132531	10.7 to 29.2 feet	Key Note Segment		5 ft	93			
132523	30.5 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
132532	37.3 to 54.9 feet	Key Note Segment		5 ft	88			
132524	58.1 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
132525	61.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
132526	70.6 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
132527	77.2 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
132528	84.2 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
132529	93.9 to 98.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
132533	98.7 to 117.5 feet	Key Note Segment		5 ft	94			
132530	123.4 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
132534	124.8 to 143.4 feet	Key Note Segment		5 ft	93			

TOTAL COST FOR: SE *side of* **SANTA FE ST** *Starting at:* **ELM AVE** **$16,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101605	SANTA FE ST	PERCY ST	ELM AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132505	0.0 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
132506	4.2 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
132502	18.3 to 19.3 feet	**Vertical Change**	.6"	5 ft	5	REF		
132507	18.8 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
132508	21.6 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
132509	30.0 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
132510	33.8 to 43.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
132503	43.5 to 44.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
132511	46.2 to 60.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
132512	64.7 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
132513	70.4 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
132514	87.7 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
132515	92.6 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
132516	115.1 to 118.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
132517	123.8 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
132519	143.8 to 144.8 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**
132518	147.8 to 149.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
132504	161.0 to 162.0 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **SANTA FE ST** *Starting at:* **PERCY ST** **$58,554.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171139	SANTA LUCIA DR	119 SANTA LUCIA DR	POINT SUR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89029	0.0 to 3.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
89053	3.4 to 22.1 feet	Key Note Segment		5 ft	94			
89030	23.9 to 26.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
89062	25.8 to 26.8 feet		5.0-6.0%	5 ft	5			
89031	27.4 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,740**
89014	29.8 to 30.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
89015	54.8 to 55.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
89032	67.7 to 69.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
89016	68.3 to 69.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
89054	70.3 to 99.8 feet	Key Note Segment		5 ft	148			
89017	81.2 to 82.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
89033	100.6 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
89018	108.2 to 109.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
89055	109.3 to 128.8 feet	Key Note Segment		5 ft	98			
89034	130.0 to 136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
89035	138.3 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
89036	147.7 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
89037	155.3 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
89019	162.8 to 163.8 feet	**Vertical Change**	.8"	5 ft	5	REF		
89038	166.2 to 172.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
89039	172.6 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
89056	185.5 to 204.9 feet	Key Note Segment		5 ft	97			
89020	195.4 to 196.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
89040	205.9 to 213.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
89057	215.5 to 245.0 feet	Key Note Segment		5 ft	148			
89021	216.1 to 217.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
89022	234.6 to 235.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
89041	246.2 to 269.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171139	SANTA LUCIA DR	119 SANTA LUCIA DR	POINT SUR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89023	272.5 to 273.5 feet	Vertical Change	.29"	5 ft	5	REF		
89042	273.0 to 284.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
89024	276.2 to 277.2 feet	Vertical Change	.4"	5 ft	5	REF		
89043	284.3 to 291.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
89058	291.8 to 323.0 feet	Key Note Segment		5 ft	156			
89044	324.1 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
89063	327.8 to 328.8 feet		5.0-6.0%	5 ft	5			
89059	331.4 to 351.3 feet	Key Note Segment		5 ft	100			
89045	352.5 to 361.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
89025	360.0 to 361.0 feet	Vertical Change	.29"	5 ft	5	REF		
89046	361.8 to 366.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
89047	367.1 to 399.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	161	SF	$120	**$19,320**
89048	399.6 to 400.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
89049	400.7 to 402.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
89060	402.3 to 432.3 feet	Key Note Segment		5 ft	150			
89050	432.9 to 435.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
89051	438.7 to 440.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
89061	440.8 to 461.6 feet	Key Note Segment		5 ft	104			
89027	452.1 to 453.1 feet	Vertical Change	-.29"	5 ft	5	REF		
89052	477.0 to 495.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
89028	493.2 to 496.0 feet	Vertical Change	.36"	5 ft	14	REF		

TOTAL COST FOR: E *side of* **SANTA LUCIA DR** *Starting at:* **119 SANTA LUCIA DR** **$135,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171136	SANTA LUCIA DR	59 SANTA LUCIA DR	107 SANTA LUCIA DR	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88991	0.0 to 18.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	93	SF	$120	**$11,100**
89007	18.5 to 46.9 feet	Key Note Segment		5 ft	142			
88992	53.0 to 55.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
88989	53.5 to 54.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
89008	55.1 to 74.8 feet	Key Note Segment		5 ft	99			
88990	65.2 to 66.2 feet	**Vertical Change**	-.62"	5 ft	5	REF		
88993	75.7 to 77.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
88994	81.2 to 82.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88995	84.8 to 93.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
88996	93.8 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
88997	98.8 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
88998	103.8 to 120.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
88999	121.3 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
89009	131.9 to 152.4 feet	Key Note Segment		5 ft	103			
89000	152.8 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
89010	162.3 to 181.3 feet	Key Note Segment		5 ft	95			
89001	182.3 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
89002	189.8 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
89003	203.2 to 211.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
89004	215.8 to 225.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
89012	221.0 to 222.7 feet		5.0-6.0%	5 ft	9			
89005	228.3 to 232.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
89006	235.5 to 240.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
89011	241.2 to 261.1 feet	Key Note Segment		5 ft	100			

TOTAL COST FOR: E *side of* **SANTA LUCIA DR** *Starting at:* **59 SANTA LUCIA DR** **$73,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171134	SANTA LUCIA DR	HOWARD RD	49 SANTA LUCIA DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88972	0.1 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
88973	17.9 to 19.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
88984	19.8 to 39.4 feet	Key Note Segment		5 ft	98			
88974	40.9 to 46.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
88975	49.5 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
88988	50.8 to 51.8 feet		5.0-6.0%	5 ft	5			
88985	53.5 to 75.9 feet	Key Note Segment		5 ft	112			
88976	85.3 to 88.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
88977	94.6 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
88970	102.2 to 103.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
88978	114.4 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
88979	119.3 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
88980	121.7 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
88986	133.5 to 153.3 feet	Key Note Segment		5 ft	99			
88971	155.1 to 156.1 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
88981	156.7 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
88987	160.0 to 181.0 feet	Key Note Segment		5 ft	105			
88982	186.3 to 188.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
88983	191.5 to 206.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**

TOTAL COST FOR: E *side of* **SANTA LUCIA DR** *Starting at:* **HOWARD RD** **$45,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171233	SANTA LUCIA DR	MANRESA DR	SEASIDE DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89587	0.8 to 10.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
89588	11.3 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
89589	22.1 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
89590	38.8 to 41.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
89591	44.4 to 63.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
89583	64.9 to 65.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
89592	65.4 to 67.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
89593	69.3 to 73.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
89594	75.3 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
89595	76.3 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
89584	86.0 to 87.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
89596	89.4 to 93.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
89597	97.2 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
89585	101.9 to 102.9 feet	**Vertical Change**	.72"	5 ft	5	SF	$75	**$375**
89586	103.6 to 104.6 feet	**Vertical Change**	1.39"	5 ft	5	SF	$75	**$375**
89598	106.6 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
89599	117.8 to 122.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
89600	130.1 to 131.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
89601	131.2 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
89602	145.3 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
89603	146.9 to 148.6 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **SANTA LUCIA DR** *Starting at:* **MANRESA DR** **$57,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171236	SANTA LUCIA DR	MARINA DR	HOWARD RD	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89620	0.3 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	164	SF	$120	**$19,680**
89617	11.7 to 12.7 feet	**Vertical Change**	.55"	5 ft	5	REF		
89618	23.5 to 24.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
89621	35.4 to 37.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
89622	39.8 to 50.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
89619	51.2 to 52.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
89623	54.4 to 63.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
89624	62.6 to 63.9 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: W *side of* **SANTA LUCIA DR** *Starting at:* **MARINA DR** **$33,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171229	SANTA LUCIA DR	POINT SUR DR	SAN JUAN DR	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89555	0.6 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
89556	5.6 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
89557	12.6 to 43.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	156	SF	$120	**$18,660**
89553	36.3 to 37.3 feet	**Vertical Change**	.62"	5 ft	5	REF		
89558	44.5 to 72.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
89559	74.6 to 85.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
89560	85.8 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
89561	88.9 to 100.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
89562	103.3 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
89563	113.8 to 118.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
89564	120.2 to 133.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
89565	134.8 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
89566	139.4 to 141.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
89567	143.8 to 146.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
89568	145.4 to 148.4 feet		5.0-6.0%	5 ft	15			
89569	145.4 to 148.4 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
89554	148.3 to 149.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SANTA LUCIA DR** *Starting at:* **POINT SUR DR** **$77,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171231	SANTA LUCIA DR	SAN JUAN DR	MANRESA DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89571	0.0 to 1.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89572	3.3 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	111	SF	$120	**$13,260**
89573	25.4 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
89570	28.2 to 29.2 feet	**Vertical Change**	-.6"	5 ft	5	REF		
89574	46.3 to 69.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
89575	69.3 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
89576	75.5 to 88.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
89577	88.1 to 95.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
89578	99.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
89579	108.8 to 112.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
89580	113.9 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
89581	124.3 to 136.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
89582	136.0 to 147.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**

TOTAL COST FOR: W *side of* **SANTA LUCIA DR** *Starting at:* **SAN JUAN DR** **$79,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171235	SANTA LUCIA DR	SEASIDE DR	MARINA DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89610	7.1 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
89604	8.9 to 9.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
89605	21.6 to 22.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
89606	59.3 to 60.3 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
89611	62.7 to 64.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
89612	65.7 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
89613	87.9 to 92.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
89607	96.9 to 97.9 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
89614	99.8 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
89608	109.7 to 110.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
89609	122.4 to 123.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
89615	132.4 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
89616	144.9 to 145.9 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: W *side of* **SANTA LUCIA DR** *Starting at:* **SEASIDE DR** **$19,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191523	SAUNDERS AVE	1038 SAUNDERS AVE	1050 SAUNDERS AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104139	0.0 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
104137	3.2 to 4.2 feet	**Vertical Change**	.82"	5 ft	5	REF		
104138	8.8 to 9.8 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAUNDERS AVE** *Starting at:* **1038 SAUNDERS AVE** **$8,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191525	SAUNDERS AVE	1050 SAUNDERS AVE	LEMON AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104150	0.0 to 31.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	156	SF	$120	**$18,720**
104140	17.5 to 18.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
104151	31.8 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
104156	44.5 to 63.5 feet	Key Note Segment		5 ft	95			
104152	67.5 to 68.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104141	68.5 to 71.2 feet	**Vertical Change**	.4"	5 ft	14	REF		
104153	69.3 to 71.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
104154	74.0 to 78.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
104142	74.8 to 75.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
104143	77.2 to 78.2 feet	**Vertical Change**	2.18"	5 ft	5	REF		
104157	78.7 to 98.2 feet	Key Note Segment		5 ft	98			
104144	79.3 to 80.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
104145	89.2 to 90.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
104147	98.5 to 99.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
104155	98.7 to 113.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
104148	107.9 to 108.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
104149	112.5 to 113.5 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAUNDERS AVE** *Starting at:* **1050 SAUNDERS AVE** **$39,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191308	SAUNDERS AVE	942 SAUNDERS AVE	VALENCIA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103256	0.0 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
103248	8.4 to 9.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
103257	10.0 to 20.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
103249	16.4 to 17.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103258	20.5 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
103250	20.8 to 21.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
103259	24.2 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
103263	40.9 to 59.2 feet	Key Note Segment		5 ft	92			
103251	41.6 to 42.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103260	62.0 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
103264	63.9 to 83.2 feet	Key Note Segment		5 ft	97			
103261	83.6 to 90.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
103262	93.9 to 110.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
103253	98.9 to 99.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
103254	105.9 to 106.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
103255	110.3 to 111.3 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **SAUNDERS AVE** *Starting at:* **942 SAUNDERS AVE** **$35,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191519	SAUNDERS AVE	LEMON AVE	VALENCIA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104072	1.7 to 2.7 feet	Vertical Change	.72"	5 ft	5	SF	$75	$375
104108	1.7 to 19.1 feet	Key Note Segment		5 ft	87			
104090	21.5 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
104091	29.4 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
104092	36.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
104073	39.0 to 40.0 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
104093	43.1 to 65.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	$13,380
104074	46.1 to 47.1 feet	Vertical Change	.29"	5 ft	5	REF		
104109	65.8 to 84.8 feet	Key Note Segment		5 ft	95			
104094	88.8 to 107.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	$10,980
104075	89.1 to 90.1 feet	Vertical Change	.26"	5 ft	5	REF		
104110	107.7 to 126.0 feet	Key Note Segment		5 ft	92			
104076	108.1 to 109.1 feet	Vertical Change	.34"	5 ft	5	REF		
104077	126.5 to 127.5 feet	Vertical Change	-.26"	5 ft	5	REF		
104095	132.1 to 134.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
104079	132.5 to 133.5 feet	Vertical Change	-.26"	5 ft	5	REF		
104080	134.3 to 135.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
104111	134.4 to 152.2 feet	Key Note Segment		5 ft	89			
104096	154.1 to 192.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	193	SF	$120	$23,160
104112	193.3 to 212.5 feet	Key Note Segment		5 ft	96			
104081	213.8 to 214.8 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
104097	215.3 to 219.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
104082	219.9 to 220.9 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
104113	221.1 to 239.0 feet	Key Note Segment		5 ft	90			
104083	239.3 to 240.3 feet	Vertical Change	-.31"	5 ft	5	REF		
104098	240.9 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
104099	252.3 to 273.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	$12,660
104084	257.7 to 258.7 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191519	SAUNDERS AVE	LEMON AVE	VALENCIA AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104100	273.6 to 278.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
104114	279.6 to 298.2 feet	Key Note Segment		5 ft	93			
104085	301.9 to 302.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
104101	304.1 to 306.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
104086	305.3 to 306.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
104115	306.8 to 325.6 feet	Key Note Segment		5 ft	94			
104087	307.4 to 308.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
104102	328.0 to 337.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
104103	337.2 to 350.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
104116	350.8 to 370.8 feet	Key Note Segment		5 ft	100			
104088	351.7 to 352.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
104104	372.6 to 377.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
104105	377.3 to 386.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
104106	386.3 to 396.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
104107	398.7 to 401.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **SAUNDERS AVE** *Starting at:* **LEMON AVE** **$114,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191522	SAUNDERS AVE	VALENCIA AVE	1038 SAUNDERS AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104124	0.7 to 4.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
104125	5.8 to 10.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
104117	9.6 to 10.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
104126	12.9 to 18.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
104134	19.0 to 38.4 feet	Key Note Segment		5 ft	97			
104127	40.0 to 53.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
104118	53.5 to 54.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
104135	53.6 to 73.3 feet	Key Note Segment		5 ft	99			
104119	74.5 to 75.5 feet	**Vertical Change**	-.57"	5 ft	5	REF		
104128	74.6 to 90.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
104129	91.1 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
104120	95.4 to 96.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
104136	104.6 to 124.8 feet	Key Note Segment		5 ft	101			
104122	105.5 to 106.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
104130	126.7 to 133.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
104123	133.2 to 134.2 feet	**Vertical Change**	3.43"	5 ft	5	SF	$75	**$375**
104131	135.9 to 147.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
104132	147.6 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
104133	156.8 to 171.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**

TOTAL COST FOR: S *side of* **SAUNDERS AVE** *Starting at:* **VALENCIA AVE** **$57,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191301	SAUNDERS RD	918 SAUNDERS AVE	930 SAUNDERS RD	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103241	0.2 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
103246	2.9 to 22.9 feet	Key Note Segment		5 ft	100			
103237	14.0 to 15.0 feet	**Vertical Change**	-.43"	5 ft	5	REF		
103242	24.8 to 34.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
103243	36.8 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
103244	40.3 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
103238	44.5 to 45.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
103239	53.5 to 54.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
103245	56.6 to 64.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
103247	64.3 to 85.1 feet	Key Note Segment		5 ft	104			
103240	84.8 to 85.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAUNDERS RD** *Starting at:* **918 SAUNDERS AVE** **$24,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131156	SAURET ST	DRAKE ST	PEERLESS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62294	0.9 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
62290	14.8 to 15.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
62295	16.7 to 36.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
62296	46.7 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
62291	52.4 to 53.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
62297	60.2 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
62298	80.0 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
62292	89.5 to 90.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
62293	102.2 to 103.2 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SAURET ST** *Starting at:* **DRAKE ST** **$45,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108131200	SAURET ST	PEERLESS ST	SOLANO ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62302	0.2 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
62303	5.1 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
62299	9.3 to 10.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
62304	11.1 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	211	SF	$120	**$25,320**
62305	58.1 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
62306	65.9 to 73.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,380**
62307	75.3 to 80.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
62308	83.0 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
62300	87.5 to 88.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
62309	89.0 to 90.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
62310	92.3 to 94.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
62311	95.0 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
62312	97.3 to 99.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
62301	97.9 to 98.9 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SAURET ST** *Starting at:* **PEERLESS ST** **$43,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131032	SAURET ST	SOLANO ST	DRAKE ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61627	0.5 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
61628	7.1 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
61634	10.2 to 32.4 feet	Key Note Segment		5 ft	111			
61635	36.4 to 58.7 feet	Key Note Segment		5 ft	112			
61629	60.6 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
61630	86.6 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
61636	95.7 to 117.8 feet	Key Note Segment		5 ft	111			
61637	121.8 to 145.3 feet	Key Note Segment		5 ft	118			
61618	133.0 to 134.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
61619	138.6 to 139.6 feet	**Vertical Change**	-.43"	5 ft	5	REF		
61631	145.8 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,580**
61638	180.1 to 204.1 feet	Key Note Segment		5 ft	120			
61620	180.7 to 181.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
61621	185.7 to 186.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
61622	193.2 to 194.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
61632	206.8 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61639	208.2 to 232.1 feet	Key Note Segment		5 ft	120			
61623	232.2 to 233.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
61633	232.5 to 268.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	179	SF	$40	**$7,180**
61624	265.5 to 266.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
61640	269.4 to 291.1 feet	Key Note Segment		5 ft	109			
61641	294.6 to 319.2 feet	Key Note Segment		5 ft	123			
61625	295.0 to 296.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
61626	301.7 to 302.7 feet	**Vertical Change**	.42"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SAURET ST** *Starting at:* **SOLANO ST** **$50,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101414	SAWMILL ST	ADELAIDE AVE	SOQUEL CT	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56710	1.5 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
56711	22.4 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
56712	29.9 to 34.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
56713	35.3 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
56714	60.2 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56715	65.5 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
56707	73.4 to 74.4 feet	**Vertical Change**	1.54"	5 ft	5	SF	$75	**$375**
56708	75.6 to 76.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
56716	82.0 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
56709	89.6 to 90.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
56717	98.4 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: SE *side of* **SAWMILL ST** *Starting at:* **ADELAIDE AVE** **$33,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108101422	SAWMILL ST	LILLY ST	ADELAIDE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56767	0.0 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
56768	16.5 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
56769	25.8 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
56762	31.3 to 32.3 feet	**Vertical Change**	-.55"	5 ft	5	REF		
56770	55.7 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
56771	61.2 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
56772	62.8 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
56773	93.9 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
56774	97.5 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
56775	105.6 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
56763	117.6 to 118.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
56776	117.8 to 119.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
56764	120.3 to 121.3 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
56765	125.3 to 128.2 feet	**Vertical Change**	.29"	5 ft	14	LF	$75	**$1,088**
56766	138.3 to 139.3 feet	**Vertical Change**	1.31"	5 ft	5	SF	$75	**$375**
56777	142.2 to 143.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
56778	143.5 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
56781	150.8 to 166.8 feet	Key Note Segment		5 ft	80			
56779	174.6 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
56782	176.6 to 192.0 feet	Key Note Segment		5 ft	77			
56780	195.6 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**

TOTAL COST FOR: NW *side of* **SAWMILL ST** *Starting at:* **LILLY ST** **$72,337.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101419	SAWMILL ST	SOQUEL CT	LILLY ST	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56755	2.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
56756	37.5 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
56757	48.8 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
56758	65.8 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
56759	83.9 to 90.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
56760	90.1 to 94.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
56761	94.7 to 104.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: SE *side of* **SAWMILL ST** *Starting at:* **SOQUEL CT** **$49,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111307	SCARLET DR	1911 SCARLET DR	AZURE DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133365	0.5 to 2.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
133372	2.1 to 3.5 feet		5.0-6.0%	5 ft	7			
133366	3.3 to 9.4 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	31	SF	$120	**$3,660**
133367	9.4 to 16.2 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	34	SF	$120	**$4,080**
133373	17.0 to 18.2 feet		6.0-7.0%	5 ft	6			
133368	19.6 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
133369	22.0 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
133371	24.9 to 43.7 feet	Key Note Segment		5 ft	94			
133364	43.5 to 44.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
133370	49.9 to 54.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: N *side of* **SCARLET DR** *Starting at:* **1911 SCARLET DR** **$13,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111142	SCARLET DR	AZURE DR	CRIMSON WY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132906	0.3 to 17.5 feet	Key Note Segment		5 ft	86			
132897	9.3 to 10.3 feet	Vertical Change	.27"	5 ft	5	REF		
132898	18.3 to 19.3 feet	Vertical Change	.96"	5 ft	5	REF		
132901	19.3 to 27.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
132902	28.0 to 39.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
132907	41.5 to 60.1 feet	Key Note Segment		5 ft	93			
132899	41.9 to 42.9 feet	Vertical Change	.31"	5 ft	5	REF		
132903	62.6 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
132900	69.9 to 70.9 feet	Vertical Change	.34"	5 ft	5	REF		
132908	70.6 to 87.8 feet	Key Note Segment		5 ft	86			
132904	90.6 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
132905	95.6 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**

TOTAL COST FOR: S *side of* **SCARLET DR** *Starting at:* **AZURE DR** **$24,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111151	SCARLET DR	CRIMSON WY	EMERALD WY	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132951	0.0 to 5.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
132952	8.7 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
132960	19.8 to 38.7 feet	Key Note Segment		5 ft	95			
132945	20.4 to 21.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
132946	28.1 to 31.7 feet	**Vertical Change**	.26"	5 ft	18	REF		
132953	41.1 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
132961	46.2 to 64.5 feet	Key Note Segment		5 ft	92			
132954	68.7 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
132955	98.1 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
132962	106.3 to 124.7 feet	Key Note Segment		5 ft	92			
132947	132.7 to 133.7 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
132963	133.0 to 150.8 feet	Key Note Segment		5 ft	89			
132948	151.3 to 152.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
132956	152.7 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
132949	163.9 to 164.9 feet	**Vertical Change**	.43"	5 ft	5	REF		
132964	174.3 to 193.8 feet	Key Note Segment		5 ft	98			
132950	175.4 to 176.4 feet	**Vertical Change**	.5"	5 ft	5	REF		
132957	195.7 to 201.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
132958	203.8 to 208.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
132959	211.3 to 214.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: S *side of* **SCARLET DR** *Starting at:* **CRIMSON WY** **$41,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111202	SCARLET DR	EMERALD WY	INDIGO DR	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133025	4.8 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
133026	13.6 to 16.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
133027	17.2 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
133031	22.5 to 42.2 feet	Key Note Segment		5 ft	99			
133022	23.8 to 24.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
133023	33.2 to 34.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
133028	45.2 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
133024	48.0 to 49.0 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**
133032	49.2 to 67.3 feet	Key Note Segment		5 ft	91			
133033	67.4 to 68.4 feet		5.0-6.0%	5 ft	5			
133029	69.5 to 70.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
133030	71.1 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: S *side of* **SCARLET DR** *Starting at:* **EMERALD WY** **$11,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111249	SCARLET DR	INDIGO DR	1931 SCARLET DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133342	2.6 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
133335	5.0 to 6.0 feet	**Vertical Change**	-.44"	5 ft	5	REF		
133356	17.3 to 35.9 feet	Key Note Segment		5 ft	93			
133343	40.4 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
133357	43.3 to 61.8 feet	Key Note Segment		5 ft	93			
133336	62.4 to 63.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
133344	63.8 to 65.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
133345	66.2 to 76.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
133337	73.3 to 74.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
133358	108.0 to 126.8 feet	Key Note Segment		5 ft	94			
133346	129.0 to 133.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
133359	133.8 to 152.8 feet	Key Note Segment		5 ft	95			
133347	154.7 to 160.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
133348	163.3 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,660**
133349	188.6 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
133360	197.8 to 217.3 feet	Key Note Segment		5 ft	98			
133350	218.8 to 222.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
133361	224.8 to 243.3 feet	Key Note Segment		5 ft	93			
133351	245.1 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
133352	261.6 to 287.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
133362	287.4 to 307.0 feet	Key Note Segment		5 ft	98			
133338	298.6 to 299.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
133353	312.1 to 315.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
133340	312.5 to 313.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
133363	315.8 to 333.0 feet	Key Note Segment		5 ft	86			
133341	324.1 to 325.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
133354	336.3 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
133355	354.7 to 357.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111249	SCARLET DR	INDIGO DR	1931 SCARLET DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**N**	*side of* **SCARLET DR**	*Starting at:* **INDIGO DR**					**$77,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201140949	SCHNOOR AVE	1916 RIVERVIEW DR	RIVERVIEW DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100236	0.0 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	50	SF	$120	**$5,976**
100237	20.4 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**
100242	23.8 to 39.3 feet	Key Note Segment		3 ft	46			
100238	39.3 to 42.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	3 ft	9	SF	$40	**$360**
100239	42.9 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$720**
100240	47.1 to 50.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,152**
100241	55.8 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$864**
100235	55.9 to 56.9 feet	**Vertical Change**	.32"	3 ft	3	REF		

TOTAL COST FOR: E *side of* **SCHNOOR AVE** *Starting at:* **1916 RIVERVIEW DR** **$9,576.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251056	SCHNOOR AVE	1930 MODOC ST	MODOC ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107835	0.8 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
107836	5.3 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
107837	10.3 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
107838	28.3 to 32.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
107839	32.3 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
107840	100.4 to 106.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
107841	110.4 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
107842	115.3 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
107843	126.3 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
107844	135.3 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
107834	140.5 to 141.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
107845	148.6 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
107846	167.5 to 173.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: E *side of* **SCHNOOR AVE** *Starting at:* **1930 MODOC ST** **$62,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251151	SCHNOOR AVE	2001 HOWARD RD	HOWARD RD	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108174	0.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
108175	9.7 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
108171	19.1 to 20.1 feet	**Vertical Change**	-.61"	5 ft	5	SF	$75	**$375**
108176	28.3 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
108172	35.1 to 36.1 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
108177	37.0 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
108178	51.1 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
108179	59.9 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	185	SF	$120	**$22,200**
108180	99.0 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
108181	110.0 to 112.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
108173	110.3 to 111.3 feet	**Vertical Change**	-.46"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SCHNOOR AVE** *Starting at:* **2001 HOWARD RD** **$54,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241608	SCHNOOR AVE	2001 NATIONAL AVE	NATIONAL AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107505	7.4 to 31.2 feet	Key Note Segment		5 ft	119			
107481	8.1 to 9.1 feet	Vertical Change	-.3"	5 ft	5	REF		
107482	31.2 to 32.2 feet	Vertical Change	.4"	5 ft	5	REF		
107494	35.1 to 51.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,840**
107495	51.5 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
107496	55.0 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
107497	63.8 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
107498	74.8 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
107483	106.5 to 107.5 feet	Vertical Change	-.4"	5 ft	5	LF	$75	**$375**
107499	109.7 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
107500	116.2 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
107484	119.3 to 120.3 feet	Vertical Change	-.32"	5 ft	5	REF		
107485	140.7 to 141.7 feet	Vertical Change	-.4"	5 ft	5	LF	$75	**$375**
107501	157.7 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
107502	167.9 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	414	SF	$120	**$49,680**
107486	171.2 to 172.2 feet	Vertical Change	-.34"	5 ft	5	REF		
107487	197.1 to 198.1 feet	Vertical Change	.27"	5 ft	5	REF		
107488	214.4 to 215.4 feet	Vertical Change	.33"	5 ft	5	REF		
107489	223.1 to 224.1 feet	Vertical Change	.31"	5 ft	5	REF		
107490	225.7 to 226.7 feet	Vertical Change	.58"	5 ft	5	REF		
107491	241.2 to 242.2 feet	Vertical Change	.42"	5 ft	5	REF		
107503	254.2 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
107504	258.9 to 269.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
107492	270.6 to 271.6 feet	Vertical Change	-.36"	5 ft	5	LF	$75	**$375**
107493	277.5 to 278.5 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SCHNOOR AVE** *Starting at:* **2001 NATIONAL AVE** **$91,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251149	SCHNOOR AVE	2001 SCHNOOR AVE	2001 SCHNOOR AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108165	10.1 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
108166	18.3 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
108167	26.7 to 32.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
108168	32.7 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
108164	35.8 to 36.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
108169	40.1 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
108170	60.3 to 63.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: W *side of* **SCHNOOR AVE** *Starting at:* **2001 SCHNOOR AVE** **$18,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201251044	SCHNOOR AVE	2300 HOWARD RD	INDUSTRIAL AVE	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107768	2.3 to 22.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
107769	22.3 to 25.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
107770	27.9 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
107771	35.3 to 88.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	265	SF	$120	**$31,800**
107772	88.5 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	291	SF	$120	**$34,920**
107763	148.9 to 149.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
107773	150.2 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
107774	169.6 to 179.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
107775	179.8 to 185.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
107776	186.3 to 187.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
107764	189.1 to 190.1 feet	**Vertical Change**	.74"	5 ft	5	SF	$75	**$375**
107777	190.4 to 195.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
107778	195.8 to 196.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
107779	203.3 to 208.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
107780	208.4 to 227.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
107765	216.0 to 217.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
107781	229.9 to 233.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
107782	234.0 to 250.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,020**
107766	251.2 to 252.2 feet	**Vertical Change**	3.19"	5 ft	5	SF	$75	**$375**
107783	253.0 to 270.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
107767	257.6 to 258.6 feet	**Vertical Change**	1.35"	5 ft	5	SF	$75	**$375**
107784	270.4 to 272.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **SCHNOOR AVE** *Starting at:* **2300 HOWARD RD** **$150,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251145	SCHNOOR AVE	HOWARD RD	1933 SCHNOOR AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108158	0.0 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	96	SF	$120	**$11,556**
108153	0.1 to 1.1 feet	**Vertical Change**	.28"	9 ft	9	REF		
108159	10.7 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,188**
108163	14.4 to 42.8 feet	Key Note Segment		9 ft	256			
108154	23.4 to 24.4 feet	**Vertical Change**	-.3"	9 ft	9	REF		
108160	42.8 to 44.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	9 ft	17	SF	$40	**$684**
108155	47.1 to 48.1 feet	**Vertical Change**	2.22"	9 ft	9	SF	$75	**$675**
108161	49.0 to 76.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	248	SF	$120	**$29,700**
108156	65.2 to 66.2 feet	**Vertical Change**	-.34"	9 ft	9	REF		
108162	77.7 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	9 ft	257	SF	$120	**$30,888**
108157	101.5 to 102.5 feet	**Vertical Change**	2.84"	9 ft	9	REF		

TOTAL COST FOR: E *side of* **SCHNOOR AVE** *Starting at:* **HOWARD RD** **$74,691.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251111	SCHNOOR AVE	MODOC ST	HOWARD RD	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107943	0.4 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	209	SF	$120	**$25,080**
107934	15.8 to 16.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
107944	42.3 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
107935	56.4 to 57.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
107945	60.8 to 66.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,420**
107946	66.5 to 69.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
107947	69.3 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
107936	71.9 to 72.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
107948	75.0 to 78.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
107949	79.2 to 87.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
107950	89.3 to 96.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
107937	95.0 to 96.0 feet	**Vertical Change**	-.62"	5 ft	5	REF		
107938	104.5 to 105.5 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
107951	105.7 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
107952	113.8 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
107959	116.6 to 146.2 feet	Key Note Segment		5 ft	148			
107953	147.2 to 149.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
107954	151.4 to 168.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,080**
107939	158.9 to 159.9 feet	**Vertical Change**	1.54"	5 ft	5	REF		
107940	163.5 to 164.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
107955	168.8 to 207.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	195	SF	$120	**$23,340**
107956	212.4 to 269.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	285	SF	$120	**$34,200**
107957	272.3 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
107941	272.4 to 273.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
107958	273.3 to 276.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
107942	276.4 to 277.4 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **SCHNOOR AVE** *Starting at:* **MODOC ST** **$133,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201140946	SCHNOOR AVE	RIVERVIEW DR	1917 N SCHNOOR AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
100228	0.7 to 2.3 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	5	SF	$120	**$576**
100225	2.9 to 3.9 feet	**Vertical Change**	-1.36"	3 ft	3	SF	$75	**$225**
100229	6.3 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$900**
100234	10.3 to 26.5 feet	Key Note Segment		3 ft	49			
100226	21.0 to 22.0 feet	**Vertical Change**	-.29"	3 ft	3	REF		
100230	26.8 to 28.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**
100231	30.2 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	63	SF	$120	**$7,560**
100227	35.9 to 36.9 feet	**Vertical Change**	.86"	3 ft	3	REF		
100232	52.2 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	13	SF	$120	**$1,584**
100233	57.4 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**

TOTAL COST FOR: E *side of* **SCHNOOR AVE** *Starting at:* **RIVERVIEW DR** **$11,817.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121346	SEAHORSE CT	2123 SEAHORSE CT	SHANNON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95903	0.5 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
95912	13.6 to 33.4 feet	Key Note Segment		5 ft	99			
95893	24.0 to 25.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
95894	33.9 to 34.9 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
95904	38.9 to 39.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
95905	39.9 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
95895	44.3 to 45.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95906	56.1 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
95913	67.2 to 87.3 feet	Key Note Segment		5 ft	101			
95897	68.4 to 69.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
95907	92.3 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
95898	97.1 to 98.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
95908	116.6 to 127.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
95899	126.6 to 127.6 feet	**Vertical Change**	-.43"	5 ft	5	REF		
95909	128.2 to 141.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
95914	141.4 to 161.8 feet	Key Note Segment		5 ft	102			
95900	142.5 to 143.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
95915	172.5 to 201.7 feet	Key Note Segment		5 ft	146			
95901	201.7 to 202.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
95910	204.7 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
95902	207.1 to 208.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
95911	228.5 to 230.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
95916	229.8 to 232.5 feet		5.0-6.0%	5 ft	14			
95917	229.8 to 232.5 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: N *side of* **SEAHORSE CT** *Starting at:* **2123 SEAHORSE CT** **$58,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121343	SEAHORSE CT	SHANNON AVE	2123 SEAHORSE CT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95872	1.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
95873	7.8 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
95858	11.2 to 12.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
95859	17.8 to 18.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
95860	25.2 to 26.2 feet	**Vertical Change**	1.06"	5 ft	5	SF	$75	**$375**
95874	27.0 to 28.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
95888	28.5 to 49.2 feet	Key Note Segment		5 ft	104			
95875	50.0 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
95861	52.4 to 53.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95889	61.1 to 81.6 feet	Key Note Segment		5 ft	102			
95862	71.7 to 72.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
95876	83.3 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
95877	96.8 to 101.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
95878	104.7 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
95863	105.4 to 106.4 feet	**Vertical Change**	1"	5 ft	5	REF		
95879	108.3 to 112.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
95880	117.9 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95864	118.6 to 119.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
95890	121.6 to 142.0 feet	Key Note Segment		5 ft	102			
95865	132.5 to 133.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
95866	141.5 to 142.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
95881	142.8 to 157.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
95867	152.6 to 153.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
95882	159.3 to 174.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,180**
95868	165.1 to 166.1 feet	**Vertical Change**	3.03"	5 ft	5	SF	$75	**$375**
95883	174.6 to 176.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
95884	179.8 to 183.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95885	189.2 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121343	SEAHORSE CT	SHANNON AVE	2123 SEAHORSE CT	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95869	193.0 to 194.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
95891	195.2 to 216.9 feet	Key Note Segment		5 ft	109			
95886	218.5 to 220.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
95892	220.1 to 238.8 feet	Key Note Segment		5 ft	94			
95870	230.5 to 231.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
95871	240.3 to 241.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
95887	242.7 to 255.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: S *side of* **SEAHORSE CT** *Starting at:* **SHANNON AVE** **$69,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112171206	SEASIDE DR	ASILOMAR DR	SANTA LUCIA DR	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89344	8.7 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
89358	22.9 to 46.0 feet	Key Note Segment		5 ft	116			
89345	46.8 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
89359	52.7 to 73.4 feet	Key Note Segment		5 ft	104			
89338	63.2 to 64.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
89346	74.8 to 104.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$17,940**
89339	90.3 to 91.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
89347	108.0 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
89348	122.2 to 124.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
89349	126.5 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
89360	133.9 to 157.0 feet	Key Note Segment		5 ft	116			
89350	158.5 to 160.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
89351	163.1 to 170.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
89352	172.9 to 174.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
89353	175.7 to 182.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
89354	185.8 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
89361	190.3 to 213.9 feet	Key Note Segment		5 ft	118			
89355	216.3 to 218.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
89356	218.5 to 220.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
89341	219.3 to 220.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
89362	221.3 to 243.9 feet	Key Note Segment		5 ft	113			
89342	238.1 to 239.1 feet	**Vertical Change**	3.05"	5 ft	5	REF		
89357	249.2 to 264.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
89363	266.9 to 268.1 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **SEASIDE DR** *Starting at:* **ASILOMAR DR** **$67,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171208	SEASIDE DR	SANTA LUCIA DR	ASILOMAR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89372	0.0 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
89373	12.6 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
89390	22.0 to 45.7 feet	Key Note Segment		5 ft	119			
89364	33.3 to 34.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
89365	45.8 to 46.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
89374	46.3 to 51.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
89391	52.1 to 72.7 feet	Key Note Segment		5 ft	103			
89375	75.8 to 77.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
89376	77.6 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
89377	85.3 to 94.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
89378	95.3 to 97.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
89366	97.1 to 98.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
89379	97.5 to 107.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
89392	108.7 to 136.9 feet	Key Note Segment		5 ft	141			
89367	127.0 to 128.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
89380	138.2 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
89381	142.3 to 146.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
89382	148.5 to 149.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
89383	150.6 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
89384	153.8 to 161.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
89385	162.7 to 163.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
89368	163.4 to 164.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
89386	166.6 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
89393	189.0 to 209.8 feet	Key Note Segment		5 ft	104			
89369	199.6 to 200.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
89387	210.8 to 220.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
89394	220.2 to 242.3 feet	Key Note Segment		5 ft	111			
89370	220.4 to 221.4 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171208	SEASIDE DR	SANTA LUCIA DR	ASILOMAR DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89388	243.0 to 255.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
89371	245.0 to 246.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
89389	255.5 to 266.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**

TOTAL COST FOR: N *side of* **SEASIDE DR** *Starting at:* **SANTA LUCIA DR** **$72,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091339	SEGOVIA CT	1277 SEGOVIA CT	BARCELONA WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130400	0.7 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
130401	17.0 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
130424	20.4 to 37.0 feet	Key Note Segment		5 ft	83			
130388	22.9 to 23.9 feet	**Vertical Change**	1.17"	5 ft	5	REF		
130389	32.2 to 33.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
130402	37.7 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
130403	43.4 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
130390	43.5 to 44.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
130391	46.8 to 47.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
130425	48.8 to 62.2 feet	Key Note Segment		5 ft	67			
130392	49.1 to 50.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
130404	63.7 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
130405	71.1 to 72.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
130406	75.0 to 89.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
130407	89.7 to 95.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
130394	97.9 to 98.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
130408	98.4 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
130409	110.1 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
130410	114.2 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
130426	126.3 to 138.9 feet	Key Note Segment		5 ft	63			
130411	138.9 to 149.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	52	SF	$40	**$2,080**
130395	143.3 to 144.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
130427	149.4 to 166.4 feet	Key Note Segment		5 ft	85			
130412	167.6 to 168.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
130413	168.8 to 170.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
130414	174.0 to 179.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
130396	181.4 to 182.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
130415	182.3 to 203.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091339	SEGOVIA CT	1277 SEGOVIA CT	BARCELONA WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130397	185.7 to 186.7 feet	Vertical Change	.26"	5 ft	5	REF		
130416	204.3 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
130417	213.4 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
130428	227.2 to 242.6 feet	Key Note Segment		5 ft	77			
130398	228.2 to 229.2 feet	Vertical Change	-.27"	5 ft	5	REF		
130418	243.3 to 244.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$200**
130419	244.7 to 246.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
130420	251.2 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
130429	253.5 to 271.2 feet	Key Note Segment		5 ft	89			
130421	272.4 to 275.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
130422	277.8 to 279.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
130423	281.3 to 283.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
130399	300.8 to 301.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **SEGOVIA CT** *Starting at:* **1277 SEGOVIA CT** **$73,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130294	0.7 to 5.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	23	SF	$120	**$2,760**
130241	5.3 to 6.3 feet	**Vertical Change**	.54"	5 ft	5	REF		
130295	5.6 to 9.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
130296	9.8 to 15.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
130297	15.2 to 23.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
130242	24.4 to 25.4 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
130298	26.0 to 41.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
130243	41.0 to 42.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
130369	41.9 to 56.7 feet	Key Note Segment		5 ft	74			
130299	60.5 to 69.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
130244	63.9 to 66.6 feet	**Vertical Change**	.27"	5 ft	13	REF		
130370	69.5 to 83.0 feet	Key Note Segment		5 ft	68			
130300	83.0 to 85.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
130301	91.7 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
130302	106.2 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
130245	112.8 to 113.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
130303	124.8 to 127.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
130304	128.7 to 132.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
130305	132.8 to 141.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
130306	143.0 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
130307	152.7 to 155.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
130308	155.1 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
130309	161.1 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
130371	163.0 to 176.2 feet	Key Note Segment		5 ft	66			
130246	172.6 to 173.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
130310	176.2 to 179.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$620**
130311	179.9 to 181.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
130247	183.2 to 184.2 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130312	186.3 to 191.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
130313	191.6 to 211.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
130248	194.8 to 195.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
130249	213.7 to 214.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
130314	214.1 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
130372	215.2 to 229.4 feet	Key Note Segment		5 ft	71			
130250	217.8 to 218.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
130251	228.3 to 229.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
130315	229.4 to 237.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	42	SF	$40	**$1,680**
130252	232.5 to 233.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
130373	239.8 to 254.4 feet	Key Note Segment		5 ft	73			
130253	243.1 to 244.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
130254	253.9 to 254.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
130316	254.4 to 256.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
130317	257.2 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
130318	261.8 to 290.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	144	SF	$120	**$17,220**
130319	300.0 to 316.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
130374	316.4 to 331.3 feet	Key Note Segment		5 ft	75			
130256	317.0 to 318.0 feet	**Vertical Change**	-.45"	5 ft	5	REF		
130257	323.1 to 324.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
130320	335.1 to 342.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
130375	343.9 to 358.8 feet	Key Note Segment		5 ft	75			
130321	359.4 to 363.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	21	SF	$40	**$840**
130258	359.8 to 360.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
130259	362.2 to 363.2 feet	**Vertical Change**	1.69"	5 ft	5	REF		
130322	368.0 to 388.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	100	SF	$120	**$12,000**
130260	378.2 to 379.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
130261	382.1 to 383.1 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130262	385.1 to 386.1 feet	Vertical Change	3.3"	5 ft	5	REF		
130323	388.2 to 389.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
130324	389.7 to 391.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
130263	390.3 to 391.3 feet	Vertical Change	.26"	5 ft	5	REF		
130325	392.1 to 421.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,460**
130264	394.3 to 395.3 feet	Vertical Change	.33"	5 ft	5	REF		
130265	407.2 to 408.2 feet	Vertical Change	.3"	5 ft	5	REF		
130376	421.2 to 434.5 feet	Key Note Segment		5 ft	67			
130266	422.3 to 423.3 feet	Vertical Change	.29"	5 ft	5	REF		
130326	434.5 to 439.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	26	SF	$40	**$1,040**
130267	439.3 to 440.3 feet	Vertical Change	.49"	5 ft	5	REF		
130327	444.1 to 445.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
130268	446.4 to 447.4 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
130377	448.1 to 460.3 feet	Key Note Segment		5 ft	61			
130269	452.8 to 453.8 feet	Vertical Change	.3"	5 ft	5	REF		
130270	454.8 to 455.8 feet	Vertical Change	-.26"	5 ft	5	REF		
130328	460.9 to 465.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,820**
130329	467.5 to 486.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,340**
130330	489.8 to 493.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
130271	492.8 to 493.8 feet	Vertical Change	.27"	5 ft	5	REF		
130331	493.5 to 511.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	**$10,740**
130272	501.7 to 502.7 feet	Vertical Change	-.28"	5 ft	5	REF		
130273	508.5 to 509.5 feet	Vertical Change	-.4"	5 ft	5	REF		
130332	514.2 to 522.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,740**
130274	519.2 to 520.2 feet	Vertical Change	.26"	5 ft	5	REF		
130333	522.3 to 524.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
130378	524.3 to 538.8 feet	Key Note Segment		5 ft	73			
130334	538.8 to 540.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130335	544.4 to 550.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
130276	549.4 to 552.3 feet	**Vertical Change**	.27"	5 ft	14	REF		
130379	550.4 to 564.8 feet	Key Note Segment		5 ft	72			
130277	557.7 to 558.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
130278	563.9 to 564.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
130336	564.8 to 571.1 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	32	SF	$40	**$1,260**
130337	573.3 to 574.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
130338	579.1 to 584.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
130339	586.7 to 599.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
130279	595.9 to 596.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
130280	604.6 to 605.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
130340	609.0 to 615.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,780**
130281	610.3 to 611.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
130341	617.3 to 625.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
130380	627.1 to 641.2 feet	Key Note Segment		5 ft	71			
130282	639.9 to 640.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
130342	642.4 to 646.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
130283	643.4 to 646.7 feet	**Vertical Change**	.27"	5 ft	17	REF		
130343	651.0 to 654.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
130381	654.1 to 668.7 feet	Key Note Segment		5 ft	73			
130284	659.8 to 660.8 feet	**Vertical Change**	3.3"	5 ft	5	REF		
130344	668.7 to 669.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
130345	670.2 to 700.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
130285	671.3 to 672.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
130286	690.5 to 691.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130346	702.5 to 706.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
130347	709.0 to 710.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130348	716.7 to 731.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130382	731.9 to 745.8 feet	Key Note Segment		5 ft	70			
130349	745.8 to 748.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	$540
130350	751.3 to 756.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,300
130383	757.7 to 772.1 feet	Key Note Segment		5 ft	72			
130351	775.3 to 780.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
130352	783.8 to 801.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	$10,500
130353	807.3 to 811.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	$2,280
130354	811.1 to 825.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	$8,460
130355	827.7 to 833.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
130384	833.3 to 848.8 feet	Key Note Segment		5 ft	78			
130288	833.8 to 834.8 feet	Vertical Change	-.32"	5 ft	5	REF		
130356	851.7 to 852.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
130289	852.7 to 853.7 feet	Vertical Change	1.04"	5 ft	5	REF		
130385	858.6 to 877.0 feet	Key Note Segment		5 ft	92			
130357	879.8 to 880.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
130358	882.0 to 883.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,080
130290	882.5 to 883.5 feet	Vertical Change	.31"	5 ft	5	REF		
130359	885.9 to 887.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
130360	890.3 to 899.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	$5,760
130291	899.7 to 900.7 feet	Vertical Change	.28"	5 ft	5	REF		
130361	902.7 to 904.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
130362	907.8 to 911.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
130363	913.3 to 917.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
130364	922.3 to 933.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
130386	936.6 to 955.5 feet	Key Note Segment		5 ft	95			
130365	957.4 to 964.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
130387	964.0 to 981.5 feet	Key Note Segment		5 ft	88			
130366	981.5 to 983.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$300

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091336	SEGOVIA CT	1477 SEGOVIA CT	1277 SEGOVIA CT	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130367	985.3 to 1011.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	131	SF	$120	**$15,720**
130292	985.6 to 986.6 feet	**Vertical Change**	3.46"	5 ft	5	REF		
130368	1013.1 to 1015.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
130293	1013.9 to 1017.1 feet	**Vertical Change**	.27"	5 ft	16	REF		

TOTAL COST FOR: N *side of* **SEGOVIA CT** *Starting at:* **1477 SEGOVIA CT** **$313,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091231	SEGOVIA CT	ALICANTE WAY	TOLUCA	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129372	0.3 to 10.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
129362	7.7 to 8.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
129363	9.9 to 10.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129373	13.0 to 18.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
129374	18.1 to 39.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	106	SF	$120	**$12,660**
129364	20.8 to 21.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
129365	33.8 to 34.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
129375	39.2 to 46.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	34	SF	$120	**$4,140**
129376	46.1 to 59.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	66	SF	$120	**$7,920**
129377	60.0 to 63.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
129378	64.3 to 65.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
129379	69.2 to 71.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
129380	76.4 to 79.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
129366	83.6 to 84.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
129381	84.6 to 105.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,480**
129367	90.0 to 91.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
129368	105.1 to 106.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
129382	105.8 to 107.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
129383	108.7 to 114.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
129384	115.6 to 117.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
129369	115.8 to 116.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129385	119.4 to 125.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
129370	120.1 to 121.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129386	127.9 to 129.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
129387	137.2 to 140.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
129388	143.8 to 150.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: S *side of* **SEGOVIA CT** *Starting at:* **ALICANTE WAY** **$67,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091212	SEGOVIA CT	BARCELONA WAY	ALICANTE WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129088	0.3 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
129089	4.8 to 24.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
129090	26.8 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
129091	31.7 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
129092	37.6 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
129093	48.2 to 69.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	106	SF	$120	**$12,720**
129094	71.7 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
129095	83.2 to 93.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
129096	93.3 to 94.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
129097	95.8 to 98.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
129098	99.3 to 100.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
129099	104.2 to 113.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
129100	113.7 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
129101	119.0 to 122.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
129102	124.0 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
129103	129.9 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
129086	133.4 to 134.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
129104	136.6 to 150.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
129087	137.7 to 138.7 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SEGOVIA CT** *Starting at:* **BARCELONA WAY** **$75,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091325	SEGOVIA CT	SAN SEBASTIAN WAY	SEVILLA ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130162	0.5 to 20.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	101	SF	$120	**$12,060**
130148	8.7 to 9.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
130149	21.4 to 22.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
130163	22.7 to 23.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
130179	24.3 to 39.9 feet	Key Note Segment		5 ft	78			
130164	39.9 to 49.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	47	SF	$40	**$1,860**
130180	50.4 to 64.6 feet	Key Note Segment		5 ft	71			
130150	54.9 to 55.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
130165	66.9 to 71.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
130166	74.0 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
130151	81.5 to 82.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
130167	83.4 to 93.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
130152	86.0 to 87.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
130153	94.6 to 95.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
130168	96.3 to 99.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
130169	99.9 to 101.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
130170	103.8 to 113.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
130154	105.2 to 106.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
130171	114.0 to 117.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
130172	119.8 to 124.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
130155	124.5 to 125.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
130181	124.7 to 138.7 feet	Key Note Segment		5 ft	70			
130173	139.8 to 144.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
130174	146.6 to 150.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
130156	149.7 to 150.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
130182	150.9 to 163.9 feet	Key Note Segment		5 ft	65			
130157	154.0 to 155.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
130158	160.2 to 161.2 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091325	SEGOVIA CT	SAN SEBASTIAN WAY	SEVILLA ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130175	168.3 to 171.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
130159	168.5 to 169.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
130160	173.3 to 174.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
130176	173.5 to 181.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
130177	184.5 to 185.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
130178	188.4 to 189.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: S *side of* **SEGOVIA CT** *Starting at:* **SAN SEBASTIAN WAY** **$54,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091328	SEGOVIA CT	SEVILLA ST	1477 SEGOVIA CT	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130202	0.6 to 2.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
130203	2.3 to 4.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,380**
130204	6.4 to 8.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
130205	11.0 to 17.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
130206	17.2 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
130236	20.2 to 35.2 feet	Key Note Segment		5 ft	75			
130183	24.1 to 25.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130184	32.9 to 33.9 feet	**Vertical Change**	2.89"	5 ft	5	REF		
130207	35.6 to 42.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
130185	38.9 to 39.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
130208	44.1 to 45.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
130186	46.2 to 47.2 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
130237	47.6 to 62.3 feet	Key Note Segment		5 ft	74			
130187	57.3 to 58.3 feet	**Vertical Change**	3.03"	5 ft	5	REF		
130209	62.4 to 73.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
130210	73.8 to 83.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
130211	87.6 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
130189	103.9 to 104.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
130190	105.6 to 106.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
130212	107.1 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
130191	107.8 to 108.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
130213	114.1 to 118.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,580**
130192	114.7 to 115.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
130214	119.8 to 121.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
130193	121.2 to 122.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
130238	122.6 to 136.3 feet	Key Note Segment		5 ft	69			
130215	137.2 to 139.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
130216	143.6 to 146.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091328	SEGOVIA CT	SEVILLA ST	1477 SEGOVIA CT	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130239	147.3 to 162.4 feet	Key Note Segment		5 ft	75			
130217	162.6 to 167.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,880**
130194	170.4 to 171.4 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
130218	171.7 to 194.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	116	SF	$120	**$13,920**
130197	186.2 to 187.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
130219	195.8 to 198.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
130240	198.8 to 212.7 feet	Key Note Segment		5 ft	70			
130220	212.7 to 214.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**
130221	219.3 to 235.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	79	SF	$120	**$9,480**
130222	238.0 to 245.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
130223	246.3 to 249.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
130224	249.9 to 253.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
130225	253.8 to 255.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
130226	256.5 to 260.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
130227	262.3 to 274.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	61	SF	$120	**$7,320**
130228	274.5 to 280.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
130229	283.7 to 286.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
130230	288.6 to 295.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
130231	296.3 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
130198	299.4 to 300.4 feet	**Vertical Change**	-.34"	5 ft	5	REF		
130232	301.2 to 304.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
130199	306.8 to 307.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
130233	309.1 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
130200	315.7 to 316.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
130234	319.3 to 321.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
130201	322.0 to 323.0 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
130235	324.1 to 327.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	14	SF	$120	**$1,740**

TOTAL COST FOR: S *side of* **SEGOVIA CT** *Starting at:* **SEVILLA ST** **$113,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091249	SEGOVIA CT	TOLUCA	SAN SEBASTIAN WAY	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129662	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
129663	5.8 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
129664	12.6 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
129665	21.3 to 26.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
129655	21.9 to 22.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
129666	30.3 to 38.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
129667	38.2 to 54.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,720**
129657	48.0 to 49.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
129668	56.8 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	273	SF	$120	**$32,700**
129658	73.9 to 74.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
129659	84.7 to 85.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
129660	86.8 to 87.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129661	104.3 to 105.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
129669	111.3 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
129670	133.5 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
129671	140.4 to 150.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**

TOTAL COST FOR: S *side of* **SEGOVIA CT** *Starting at:* **TOLUCA** **$78,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281501	SENECA AVE	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113228	0.2 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
113229	16.4 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
113215	18.9 to 19.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
113230	20.3 to 24.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
113231	26.7 to 30.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
113251	32.0 to 50.7 feet	Key Note Segment		5 ft	94			
113232	55.6 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
113252	58.0 to 76.5 feet	Key Note Segment		5 ft	93			
113216	68.3 to 69.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
113217	76.6 to 77.6 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
113233	78.1 to 85.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
113234	87.4 to 90.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
113218	89.5 to 90.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
113235	90.1 to 105.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
113236	105.6 to 112.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
113253	114.3 to 133.3 feet	Key Note Segment		5 ft	95			
113237	134.0 to 158.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	125	SF	$120	**$14,940**
113219	153.1 to 154.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
113238	161.7 to 176.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,880**
113220	166.1 to 167.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
113221	173.3 to 174.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
113239	176.5 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
113240	180.6 to 196.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
113222	186.7 to 187.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
113241	196.6 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
113254	199.3 to 217.9 feet	Key Note Segment		5 ft	93			
113242	218.3 to 219.6 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	7	SF	$40	**$260**
113243	220.9 to 223.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281501	SENECA AVE	GARY LN	MADRID LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113244	224.3 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
113245	232.3 to 252.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**
113255	255.3 to 273.7 feet	Key Note Segment		5 ft	92			
113223	265.3 to 266.3 feet	**Vertical Change**	1.58"	5 ft	5	REF		
113224	274.3 to 275.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
113246	276.6 to 278.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
113247	278.8 to 309.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,660**
113225	303.2 to 307.1 feet	**Vertical Change**	-.31"	5 ft	20	REF		
113256	310.8 to 329.8 feet	Key Note Segment		5 ft	95			
113226	320.6 to 321.6 feet	**Vertical Change**	-.45"	5 ft	5	REF		
113227	330.9 to 331.9 feet	**Vertical Change**	.55"	5 ft	5	REF		
113248	331.5 to 336.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
113257	336.7 to 356.1 feet	Key Note Segment		5 ft	97			
113249	357.6 to 377.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
113250	377.9 to 381.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: E *side of* **SENECA AVE** *Starting at:* **GARY LN** **$125,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281457	SENECA AVE	MADRID LN	GARY LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113193	0.0 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
113208	23.3 to 42.0 feet	Key Note Segment		5 ft	94			
113194	42.1 to 43.5 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	7	SF	$40	**$280**
113195	44.3 to 49.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
113180	47.3 to 48.3 feet	**Vertical Change**	1.18"	5 ft	5	REF		
113181	49.3 to 50.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
113209	49.4 to 68.6 feet	Key Note Segment		5 ft	96			
113196	70.3 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
113197	85.9 to 134.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	245	SF	$120	**$29,400**
113183	96.6 to 97.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
113210	134.9 to 154.0 feet	Key Note Segment		5 ft	96			
113184	154.5 to 155.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
113198	155.6 to 160.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
113211	161.0 to 179.9 feet	Key Note Segment		5 ft	95			
113199	180.0 to 181.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	6	SF	$40	**$240**
113200	181.2 to 182.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
113201	183.3 to 192.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,580**
113185	184.5 to 185.5 feet	**Vertical Change**	.88"	5 ft	5	REF		
113202	192.6 to 217.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	126	SF	$120	**$15,120**
113212	218.0 to 236.7 feet	Key Note Segment		5 ft	94			
113187	233.6 to 234.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
113188	235.9 to 236.9 feet	**Vertical Change**	2.33"	5 ft	5	REF		
113203	239.4 to 270.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
113204	270.5 to 290.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,940**
113205	294.3 to 302.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
113190	301.4 to 302.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
113213	303.8 to 322.4 feet	Key Note Segment		5 ft	93			
113191	313.3 to 314.3 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281457	SENECA AVE	MADRID LN	GARY LN	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113206	323.6 to 328.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
113214	328.8 to 348.1 feet	Key Note Segment		5 ft	97			
113207	351.3 to 380.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,460**
113192	360.7 to 361.7 feet	**Vertical Change**	2.57"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SENECA AVE** *Starting at:* **MADRID LN** **$133,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281549	SENECA DR	GARY LN	HELENA WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113695	0.7 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
113696	6.5 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
113697	10.4 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
113698	22.2 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
113670	27.6 to 28.6 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
113671	33.8 to 34.8 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
113699	37.7 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
113700	50.7 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
113736	51.8 to 66.9 feet	Key Note Segment		5 ft	76			
113701	67.8 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
113672	69.3 to 70.3 feet	**Vertical Change**	-.35"	5 ft	5	REF		
113702	76.9 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
113737	78.5 to 92.4 feet	Key Note Segment		5 ft	70			
113703	94.6 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
113673	104.1 to 105.1 feet	**Vertical Change**	1.68"	5 ft	5	SF	$75	**$375**
113704	107.2 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
113674	108.6 to 109.6 feet	**Vertical Change**	.55"	5 ft	5	REF		
113705	116.5 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
113706	123.7 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
113707	129.2 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
113675	133.4 to 134.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
113676	139.9 to 140.9 feet	**Vertical Change**	.56"	5 ft	5	SF	$75	**$375**
113677	146.4 to 147.4 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
113708	149.3 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
113709	156.3 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
113738	158.1 to 172.2 feet	Key Note Segment		5 ft	71			
113710	172.3 to 183.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	54	SF	$40	**$2,140**
113749	175.7 to 176.7 feet	**Protruding Object**	48"	5 ft	5	JOB	$99	**$99**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281549	SENECA DR	GARY LN	HELENA WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113739	183.1 to 197.8 feet	Key Note Segment		5 ft	74			
113711	206.0 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
113712	226.9 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
113678	244.2 to 245.2 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
113679	247.3 to 248.3 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
113713	258.3 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
113740	263.8 to 277.1 feet	Key Note Segment		5 ft	67			
113714	281.5 to 287.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
113741	288.3 to 302.5 feet	Key Note Segment		5 ft	71			
113715	304.4 to 305.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
113716	306.0 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
113717	314.8 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
113718	322.1 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
113680	323.4 to 324.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
113719	327.1 to 337.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
113681	336.1 to 337.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
113682	343.3 to 344.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
113683	347.6 to 348.6 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
113750	363.4 to 364.4 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
113742	368.4 to 382.5 feet	Key Note Segment		5 ft	71			
113684	369.0 to 370.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
113751	379.9 to 380.9 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
113720	382.6 to 383.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
113685	389.0 to 390.0 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
113721	405.3 to 420.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
113743	420.5 to 434.8 feet	Key Note Segment		5 ft	72			
113722	435.5 to 438.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
113744	447.0 to 461.7 feet	Key Note Segment		5 ft	74			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281549	SENECA DR	GARY LN	HELENA WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113686	447.8 to 448.8 feet	Vertical Change	-.31"	5 ft	5	REF		
113723	462.3 to 473.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	58	SF	$40	$2,320
113724	480.3 to 484.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
113725	506.1 to 508.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
113726	514.0 to 519.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
113727	522.8 to 524.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
113745	525.8 to 539.1 feet	Key Note Segment		5 ft	67			
113728	539.1 to 542.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	$680
113687	544.4 to 545.4 feet	Vertical Change	.66"	5 ft	5	SF	$75	$375
113746	552.0 to 565.0 feet	Key Note Segment		5 ft	65			
113688	559.9 to 560.9 feet	Vertical Change	.27"	5 ft	5	REF		
113729	565.7 to 578.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,860
113689	585.7 to 586.7 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
113752	586.8 to 587.8 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
113690	592.2 to 593.2 feet	Vertical Change	-.57"	5 ft	5	SF	$75	$375
113691	602.0 to 603.0 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
113692	614.0 to 615.0 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
113693	617.5 to 618.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
113730	627.8 to 630.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
113747	630.1 to 644.5 feet	Key Note Segment		5 ft	72			
113731	644.5 to 649.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	$920
113732	649.1 to 656.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
113748	657.7 to 670.8 feet	Key Note Segment		5 ft	66			
113694	672.0 to 673.0 feet	Vertical Change	.39"	5 ft	5	REF		
113733	672.1 to 677.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
113734	679.9 to 683.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
113735	684.4 to 685.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840

TOTAL COST FOR: W *side of* **SENECA DR** *Starting at:* **GARY LN** **$104,166.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281600	SENECA DR	HELENA WAY	PECAN AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113832	3.9 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
113833	24.5 to 27.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
113834	28.5 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
113818	47.7 to 48.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
113835	51.7 to 52.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
113836	55.5 to 81.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,300**
113850	77.8 to 78.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
113846	82.9 to 96.3 feet	Key Note Segment		5 ft	67			
113819	83.6 to 84.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
113837	96.8 to 105.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
113838	105.3 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
113820	107.7 to 108.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
113821	114.0 to 115.0 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
113839	116.4 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
113822	120.5 to 121.5 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
113847	133.5 to 146.8 feet	Key Note Segment		5 ft	67			
113823	147.5 to 148.5 feet	**Vertical Change**	.81"	5 ft	5	SF	$75	**$375**
113824	160.8 to 161.8 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
113840	164.4 to 165.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
113841	165.8 to 167.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
113825	167.5 to 168.5 feet	**Vertical Change**	.6"	5 ft	5	REF		
113826	176.4 to 177.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
113842	188.2 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
113848	203.3 to 217.1 feet	Key Note Segment		5 ft	69			
113827	218.3 to 219.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
113843	218.7 to 230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
113849	230.5 to 245.9 feet	Key Note Segment		5 ft	77			
113844	247.3 to 252.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281600	SENECA DR	HELENA WAY	PECAN AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113829	252.4 to 253.4 feet	Vertical Change	2.53"	5 ft	5	SF	$75	**$375**
113830	254.7 to 255.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
113831	258.1 to 259.1 feet	Vertical Change	-.31"	5 ft	5	LF	$75	**$375**
113845	271.1 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: W *side of* **SENECA DR** *Starting at:* **HELENA WAY** **$75,114.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281609	SENECA DR	PECAN AVE	GARY LN	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113887	0.2 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
113888	2.3 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
113851	2.5 to 3.5 feet	**Vertical Change**	1.76"	5 ft	5	REF		
113889	20.9 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
113852	32.0 to 33.0 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
113946	34.5 to 47.9 feet	Key Note Segment		5 ft	67			
113890	47.9 to 60.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	65	SF	$40	**$2,580**
113854	51.2 to 52.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
113855	54.3 to 55.3 feet	**Vertical Change**	2.99"	5 ft	5	REF		
113947	60.8 to 74.8 feet	Key Note Segment		5 ft	70			
113856	61.8 to 62.8 feet	**Vertical Change**	-.88"	5 ft	5	REF		
113857	68.5 to 69.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
113891	75.6 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
113858	76.6 to 77.6 feet	**Vertical Change**	2.13"	5 ft	5	REF		
113892	78.6 to 83.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
113893	84.3 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
113859	84.8 to 85.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
113860	110.4 to 111.4 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$375**
113861	118.8 to 119.8 feet	**Vertical Change**	-1.66"	5 ft	5	SF	$75	**$375**
113894	124.3 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
113862	130.1 to 131.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
113948	130.8 to 144.6 feet	Key Note Segment		5 ft	69			
113895	148.8 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
113949	157.1 to 169.6 feet	Key Note Segment		5 ft	63			
113863	164.8 to 165.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
113896	170.0 to 171.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
113864	170.7 to 171.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
113897	173.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281609	SENECA DR	PECAN AVE	GARY LN	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113865	186.1 to 187.1 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
113898	208.8 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
113899	217.5 to 220.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
113900	223.9 to 230.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
113950	230.7 to 244.3 feet	Key Note Segment		5 ft	68			
113901	246.0 to 248.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
113902	248.3 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
113951	257.7 to 270.1 feet	Key Note Segment		5 ft	62			
113903	270.3 to 285.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	74	SF	$40	$2,940
113904	285.0 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	$15,120
113905	314.5 to 320.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
113906	323.6 to 324.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
113907	325.5 to 326.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
113952	327.3 to 340.3 feet	Key Note Segment		5 ft	65			
113908	342.4 to 351.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
113953	354.3 to 367.8 feet	Key Note Segment		5 ft	68			
113866	361.8 to 362.8 feet	Vertical Change	.37"	5 ft	5	REF		
113909	367.8 to 375.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	40	SF	$40	$1,600
113910	389.8 to 391.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
113867	402.5 to 403.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
113911	416.6 to 419.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
113912	423.3 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
113954	427.2 to 442.8 feet	Key Note Segment		5 ft	78			
113868	428.2 to 429.2 feet	Vertical Change	3.38"	5 ft	5	REF		
113869	442.3 to 443.3 feet	Vertical Change	1.33"	5 ft	5	REF		
113913	445.3 to 448.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
113955	455.1 to 467.6 feet	Key Note Segment		5 ft	63			
113870	461.0 to 462.0 feet	Vertical Change	-.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281609	SENECA DR	PECAN AVE	GARY LN	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113914	508.9 to 511.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
113956	523.6 to 536.3 feet	Key Note Segment		5 ft	63			
113957	550.7 to 564.2 feet	Key Note Segment		5 ft	68			
113915	564.2 to 573.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	45	SF	$40	**$1,820**
113871	564.9 to 565.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
113916	577.6 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
113872	579.6 to 580.6 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
113917	583.6 to 588.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
113873	605.9 to 606.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
113918	614.9 to 622.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
113958	624.3 to 636.8 feet	Key Note Segment		5 ft	63			
113919	636.8 to 647.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,180**
113920	651.5 to 654.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
113874	657.4 to 658.4 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
113875	665.9 to 666.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
113876	670.6 to 671.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
113921	674.4 to 675.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
113959	675.6 to 689.9 feet	Key Note Segment		5 ft	72			
113877	676.6 to 677.6 feet	**Vertical Change**	-.51"	5 ft	5	REF		
113922	690.2 to 691.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
113923	691.5 to 694.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
113924	696.6 to 698.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
113960	701.3 to 715.5 feet	Key Note Segment		5 ft	71			
113925	717.1 to 730.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
113926	730.8 to 732.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
113927	739.8 to 743.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
113878	744.8 to 745.8 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
113928	746.8 to 760.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281609	SENECA DR	PECAN AVE	GARY LN	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113929	760.3 to 776.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
113961	776.1 to 790.3 feet	Key Note Segment		5 ft	71			
113930	790.3 to 791.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	5	SF	$40	**$200**
113931	796.8 to 799.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
113962	801.2 to 815.9 feet	Key Note Segment		5 ft	74			
113932	815.9 to 831.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	80	SF	$40	**$3,180**
113933	835.4 to 847.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
113879	848.3 to 849.3 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
113934	851.6 to 856.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
113935	866.3 to 875.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
113963	875.7 to 889.8 feet	Key Note Segment		5 ft	71			
113880	881.6 to 882.6 feet	**Vertical Change**	2.78"	5 ft	5	REF		
113936	890.0 to 898.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	41	SF	$40	**$1,640**
113937	898.6 to 901.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
113964	901.4 to 916.1 feet	Key Note Segment		5 ft	74			
113881	902.1 to 903.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
113938	916.1 to 924.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	41	SF	$40	**$1,640**
113939	926.4 to 928.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
113967	926.8 to 927.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
113940	932.1 to 933.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
113941	934.9 to 975.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
113882	948.2 to 949.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
113883	958.5 to 966.8 feet	**Vertical Change**	.28"	5 ft	42	REF		
113965	975.9 to 989.9 feet	Key Note Segment		5 ft	70			
113942	990.9 to 994.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
113943	994.2 to 1001.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
113966	1001.7 to 1016.3 feet	Key Note Segment		5 ft	73			
113884	1009.4 to 1010.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281609	SENECA DR	PECAN AVE	GARY LN	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
113944	1020.5 to 1030.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
113885	1029.8 to 1030.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
113945	1033.2 to 1050.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
113886	1050.0 to 1051.0 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **SENECA DR** *Starting at:* **PECAN AVE** **$211,754.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111243	SEPIA CT	1913 SEPIA CT	INDIGO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133282	0.0 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
133271	9.0 to 10.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
133283	10.8 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
133314	20.3 to 40.0 feet	Key Note Segment		5 ft	99			
133284	41.0 to 42.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
133285	43.1 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133272	45.6 to 46.6 feet	**Vertical Change**	2.17"	5 ft	5	REF		
133286	52.1 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
133287	55.9 to 59.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
133288	59.8 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133315	64.3 to 83.1 feet	Key Note Segment		5 ft	94			
133273	64.6 to 65.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
133274	66.4 to 67.4 feet	**Vertical Change**	2.86"	5 ft	5	REF		
133289	83.7 to 86.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
133290	89.3 to 91.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
133291	94.5 to 103.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
133292	105.9 to 121.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
133293	124.6 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
133316	130.9 to 149.6 feet	Key Note Segment		5 ft	94			
133294	151.7 to 155.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
133295	155.1 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
133317	156.7 to 175.2 feet	Key Note Segment		5 ft	93			
133296	178.6 to 189.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
133297	192.8 to 195.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
133298	198.3 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
133299	216.5 to 218.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133318	219.2 to 238.0 feet	Key Note Segment		5 ft	94			
133300	239.6 to 246.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111243	SEPIA CT	1913 SEPIA CT	INDIGO DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133319	246.0 to 263.4 feet	Key Note Segment		5 ft	87			
133276	271.2 to 272.2 feet	Vertical Change	.32"	5 ft	5	REF		
133301	271.3 to 272.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
133302	276.7 to 279.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
133303	282.4 to 284.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
133304	284.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	$10,800
133277	291.3 to 292.3 feet	Vertical Change	2.71"	5 ft	5	REF		
133305	305.7 to 308.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
133320	309.8 to 328.6 feet	Key Note Segment		5 ft	94			
133321	335.3 to 354.0 feet	Key Note Segment		5 ft	94			
133278	335.9 to 336.9 feet	Vertical Change	-.97"	5 ft	5	REF		
133279	351.2 to 352.2 feet	Vertical Change	.79"	5 ft	5	REF		
133306	356.3 to 364.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,860
133307	366.8 to 368.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
133308	371.4 to 377.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
133309	381.9 to 387.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
133310	389.1 to 397.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
133322	399.7 to 418.1 feet	Key Note Segment		5 ft	92			
133281	400.7 to 401.7 feet	Vertical Change	.37"	5 ft	5	REF		
133311	422.2 to 425.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
133323	426.1 to 444.7 feet	Key Note Segment		5 ft	93			
133312	447.4 to 448.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
133313	450.7 to 464.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,160

TOTAL COST FOR: S *side of* **SEPIA CT** *Starting at:* **1913 SEPIA CT** **$106,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111238	SEPIA CT	INDIGO DR	1923 SEPIA CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133231	0.3 to 1.3 feet	Vertical Change	.67"	5 ft	5	REF		
133240	0.7 to 3.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
133241	9.0 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
133263	16.7 to 35.9 feet	Key Note Segment		5 ft	96			
133232	28.5 to 29.5 feet	Vertical Change	3.43"	5 ft	5	REF		
133242	39.3 to 42.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
133264	43.0 to 61.8 feet	Key Note Segment		5 ft	94			
133233	46.8 to 47.8 feet	Vertical Change	.37"	5 ft	5	REF		
133234	59.9 to 60.9 feet	Vertical Change	-.26"	5 ft	5	REF		
133243	63.7 to 67.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
133235	69.3 to 70.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
133244	70.8 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	$4,920
133245	80.2 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
133246	96.5 to 98.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
133247	102.6 to 106.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,340
133265	107.3 to 126.2 feet	Key Note Segment		5 ft	95			
133248	128.6 to 131.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,860
133266	133.0 to 151.8 feet	Key Note Segment		5 ft	94			
133236	152.5 to 153.5 feet	Vertical Change	.34"	5 ft	5	REF		
133249	155.8 to 167.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,900
133250	168.1 to 173.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,120
133237	171.3 to 172.3 feet	Vertical Change	.41"	5 ft	5	REF		
133251	173.3 to 177.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
133238	175.3 to 176.3 feet	Vertical Change	-.4"	5 ft	5	REF		
133252	180.4 to 196.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	$9,900
133267	196.9 to 216.8 feet	Key Note Segment		5 ft	100			
133253	219.0 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
133268	223.7 to 242.3 feet	Key Note Segment		5 ft	93			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111238	SEPIA CT	INDIGO DR	1923 SEPIA CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133254	246.0 to 253.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
133255	253.9 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
133256	274.8 to 286.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
133239	286.6 to 287.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
133269	286.6 to 305.8 feet	Key Note Segment		5 ft	96			
133257	307.6 to 312.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
133270	312.6 to 330.3 feet	Key Note Segment		5 ft	88			
133258	333.9 to 340.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
133259	345.8 to 353.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
133260	354.8 to 361.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
133261	366.6 to 370.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
133262	386.3 to 387.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: N *side of* **SEPIA CT** *Starting at:* **INDIGO DR** **$91,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191526	SEVENTH ST	123 SEVENTH ST	S G ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39799	2.3 to 20.8 feet	Key Note Segment		5 ft	83			
39795	24.8 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,832**
39796	49.4 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,016**
39797	78.3 to 85.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**
39798	89.8 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**

TOTAL COST FOR: NW *side of* **SEVENTH ST** *Starting at:* **123 SEVENTH ST** **$21,222.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105191538	SEVENTH ST	S G ST	228 S G ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39856	0.0 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	188	SF	$120	**$22,536**
39857	33.8 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,688**
39858	51.1 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,376**
39859	58.4 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	186	SF	$120	**$22,320**
39854	87.3 to 88.3 feet	**Vertical Change**	1.24"	6 ft	6	REF		
39860	94.6 to 132.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	229	SF	$120	**$27,432**
39855	118.3 to 119.3 feet	**Vertical Change**	-.36"	6 ft	6	REF		
39861	140.1 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$3,024**
39862	148.6 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	68	SF	$120	**$8,208**
39863	160.8 to 191.5 feet	Key Note Segment		6 ft	184			

TOTAL COST FOR: NW *side of* **SEVENTH ST** *Starting at:* **S G ST** **$91,584.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105191523	SEVENTH ST	S G ST	301 S G ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39786	0.0 to 10.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
39787	12.8 to 30.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	91	SF	$120	**$10,860**
39788	33.9 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
39789	43.3 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
39790	48.3 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
39793	69.4 to 95.8 feet	Key Note Segment		5 ft	132			
39785	69.7 to 70.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
39791	95.8 to 102.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	31	SF	$40	**$1,240**
39792	107.3 to 117.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
39794	117.6 to 127.6 feet	Key Note Segment		5 ft	50			

TOTAL COST FOR: SE *side of* **SEVENTH ST** *Starting at:* **S G ST** **$38,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091319	SEVILLA ST	SEGOVIA CT	TOLEDO WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130078	0.0 to 1.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
130079	3.1 to 30.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	139	SF	$120	**$16,680**
130074	7.6 to 8.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
130080	31.2 to 33.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**
130081	34.4 to 39.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,060**
130082	39.9 to 41.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
130083	42.1 to 46.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
130076	43.0 to 44.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
130084	46.6 to 48.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
130085	50.7 to 61.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,360**
130077	51.7 to 52.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
130086	63.8 to 79.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
130087	81.2 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
130088	85.0 to 86.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
130089	90.8 to 91.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
130090	94.2 to 123.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	146	SF	$120	**$17,460**
130091	125.8 to 127.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
130092	128.0 to 130.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
130093	133.4 to 143.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	50	SF	$120	**$5,940**
130094	144.3 to 150.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
130095	156.0 to 157.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: W *side of* **SEVILLA ST** *Starting at:* **SEGOVIA CT** **$74,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091317	SEVILLA ST	TOLEDO WAY	SEGOVIA CT	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130063	1.0 to 17.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,140**
130053	1.7 to 2.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
130064	18.6 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,700**
130054	46.4 to 47.4 feet	**Vertical Change**	.71"	5 ft	5	REF		
130065	52.2 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
130055	67.9 to 68.9 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
130066	72.4 to 76.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
130067	77.1 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
130068	85.7 to 97.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
130056	100.8 to 101.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
130069	101.8 to 103.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
130057	102.7 to 103.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130070	109.0 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
130071	115.8 to 127.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
130058	116.2 to 117.2 feet	**Vertical Change**	.87"	5 ft	5	REF		
130072	128.6 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
130059	135.0 to 139.0 feet	**Vertical Change**	.31"	5 ft	20	REF		
130060	143.0 to 144.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
130061	156.0 to 157.0 feet	**Vertical Change**	.48"	5 ft	5	REF		
130073	159.5 to 163.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
130062	160.5 to 161.5 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **SEVILLA ST** *Starting at:* **TOLEDO WAY** **$76,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201251433	SHANNON AVE	413 SHANNON AVE	413 SHANNON AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108687	16.0 to 18.9 feet	**Vertical Change**	-.29"	4 ft	12	LF	$75	**$870**
108690	27.6 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
108691	29.7 to 48.6 feet	Key Note Segment		4 ft	76			
108688	30.3 to 31.3 feet	**Vertical Change**	.9"	4 ft	4	REF		
108689	48.9 to 49.9 feet	**Vertical Change**	-.58"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **413 SHANNON AVE** **$1,446.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121420	SHANNON AVE	DRIFTWOOD DR	W PARK DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96303	2.0 to 18.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
96278	7.7 to 8.7 feet	**Vertical Change**	.59"	5 ft	5	REF		
96304	18.0 to 31.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
96279	33.6 to 34.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
96305	34.1 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
96306	38.3 to 46.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
96307	50.3 to 60.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
96308	63.8 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
96309	73.3 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
96310	89.7 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
96346	97.3 to 113.3 feet	Key Note Segment		5 ft	80			
96280	98.3 to 99.3 feet	**Vertical Change**	.55"	5 ft	5	REF		
96311	117.8 to 127.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
96312	130.8 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
96313	138.3 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
96281	138.8 to 139.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
96347	144.8 to 158.7 feet	Key Note Segment		5 ft	69			
96314	172.8 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
96315	197.9 to 208.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
96282	203.2 to 204.2 feet	**Vertical Change**	-.56"	5 ft	5	REF		
96283	214.9 to 215.9 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
96316	217.5 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
96348	224.2 to 238.0 feet	Key Note Segment		5 ft	69			
96284	231.6 to 232.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
96317	239.7 to 261.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
96349	261.7 to 275.6 feet	Key Note Segment		5 ft	70			
96285	262.4 to 263.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
96286	269.4 to 270.4 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121420	SHANNON AVE	DRIFTWOOD DR	W PARK DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96318	275.6 to 279.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	18	SF	$40	$740
96319	285.8 to 298.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
96287	286.1 to 287.1 feet	Vertical Change	-.48"	5 ft	5	REF		
96320	301.8 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
96321	313.3 to 315.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
96322	319.5 to 321.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
96350	321.2 to 334.9 feet	Key Note Segment		5 ft	69			
96288	322.2 to 323.2 feet	Vertical Change	-.33"	5 ft	5	REF		
96289	329.3 to 330.3 feet	Vertical Change	2.68"	5 ft	5	REF		
96323	339.8 to 341.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
96324	354.0 to 357.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
96325	364.9 to 370.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
96326	373.6 to 377.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
96351	377.8 to 401.3 feet	Key Note Segment		5 ft	118			
96327	405.0 to 413.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$4,980
96328	415.6 to 425.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
96329	431.4 to 433.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
96290	443.1 to 444.1 feet	Vertical Change	.33"	5 ft	5	REF		
96330	443.6 to 450.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
96352	454.2 to 469.1 feet	Key Note Segment		5 ft	75			
96291	455.5 to 456.5 feet	Vertical Change	-.59"	5 ft	5	REF		
96292	462.6 to 463.6 feet	Vertical Change	.3"	5 ft	5	REF		
96293	469.7 to 470.7 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
96331	477.1 to 487.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
96332	490.3 to 491.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
96353	491.8 to 506.7 feet	Key Note Segment		5 ft	75			
96294	507.2 to 508.2 feet	Vertical Change	-.5"	5 ft	5	REF		
96333	507.3 to 525.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	90	SF	$40	$3,600

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121420	SHANNON AVE	DRIFTWOOD DR	W PARK DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96295	522.4 to 523.4 feet	Vertical Change	.27"	5 ft	5	REF		
96334	527.8 to 535.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
96335	535.3 to 538.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
96336	543.6 to 548.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
96337	552.3 to 553.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
96338	554.3 to 561.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	$4,500
96296	563.9 to 564.9 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
96339	565.1 to 598.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	166	SF	$120	$19,920
96297	575.2 to 576.2 feet	Vertical Change	.52"	5 ft	5	REF		
96340	598.3 to 605.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
96298	601.8 to 602.8 feet	Vertical Change	.39"	5 ft	5	REF		
96341	606.5 to 607.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
96299	608.3 to 609.3 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
96342	612.0 to 613.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
96343	615.7 to 627.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,260
96300	623.3 to 624.3 feet	Vertical Change	.33"	5 ft	5	REF		
96301	627.2 to 628.2 feet	Vertical Change	.28"	5 ft	5	REF		
96344	639.3 to 648.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
96345	650.5 to 652.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,020
96302	651.2 to 652.2 feet	Vertical Change	1.55"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SHANNON AVE** *Starting at:* **DRIFTWOOD DR** **$196,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121231	SHANNON AVE	LIGHTHOUSE DR	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95059	0.1 to 4.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	21	SF	$120	**$2,460**
95040	3.7 to 4.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
95060	4.2 to 8.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
95061	9.8 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
95062	11.3 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
95095	21.8 to 48.7 feet	Key Note Segment		5 ft	135			
95041	32.8 to 33.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
95063	51.1 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
95042	51.3 to 52.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
95064	57.3 to 65.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
95065	66.5 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
95096	68.1 to 96.3 feet	Key Note Segment		5 ft	141			
95043	86.7 to 87.7 feet	**Vertical Change**	.54"	5 ft	5	REF		
95066	98.0 to 106.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
95067	106.4 to 125.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,340**
95044	113.7 to 114.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
95068	125.8 to 133.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
95045	126.6 to 127.6 feet	**Vertical Change**	-.82"	5 ft	5	REF		
95069	135.8 to 146.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
95046	139.5 to 140.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
95097	146.8 to 178.6 feet	Key Note Segment		5 ft	159			
95047	159.2 to 160.2 feet	**Vertical Change**	.66"	5 ft	5	REF		
95048	175.6 to 176.6 feet	**Vertical Change**	.65"	5 ft	5	REF		
95070	179.1 to 181.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$540**
95071	182.2 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
95072	188.5 to 199.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
95073	201.4 to 209.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
95074	211.7 to 214.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121231	SHANNON AVE	LIGHTHOUSE DR	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95098	215.3 to 243.8 feet	Key Note Segment		5 ft	143			
95075	254.5 to 257.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
95076	259.0 to 262.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95077	271.3 to 277.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
95078	277.8 to 281.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
95099	281.8 to 305.0 feet	Key Note Segment		5 ft	116			
95049	282.1 to 283.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
95079	305.0 to 307.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$420**
95080	308.3 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
95081	312.6 to 326.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
95050	321.9 to 322.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
95100	326.8 to 352.8 feet	Key Note Segment		5 ft	130			
95051	336.8 to 337.8 feet	**Vertical Change**	.78"	5 ft	5	REF		
95052	338.5 to 339.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95053	345.9 to 346.9 feet	**Vertical Change**	.51"	5 ft	5	REF		
95054	353.0 to 354.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
95082	353.7 to 354.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
95083	360.0 to 362.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
95084	366.3 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
95055	368.7 to 369.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
95085	389.8 to 391.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
95056	392.8 to 393.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
95086	395.1 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
95101	422.8 to 445.2 feet	Key Note Segment		5 ft	112			
95087	445.9 to 447.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
95088	451.7 to 453.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
95089	457.8 to 468.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
95090	473.8 to 476.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121231	SHANNON AVE	LIGHTHOUSE DR	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95057	479.4 to 480.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
95091	481.3 to 491.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
95102	491.9 to 522.5 feet	Key Note Segment		5 ft	153			
95058	493.2 to 494.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
95092	523.1 to 540.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
95103	545.4 to 568.1 feet	Key Note Segment		5 ft	114			
95093	568.1 to 576.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	44	SF	$40	**$1,760**
95094	579.9 to 606.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**

TOTAL COST FOR: W *side of* **SHANNON AVE** *Starting at:* **LIGHTHOUSE DR** **$136,745.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121354	SHANNON AVE	RIVERVIEW DR	DRIFTWOOD DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96002	0.0 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,820**
96003	9.7 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
96004	13.8 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
96005	18.8 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
96006	55.9 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
95991	78.0 to 79.0 feet	**Vertical Change**	3.09"	5 ft	5	SF	$75	**$375**
96007	79.3 to 83.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
96028	86.3 to 100.7 feet	Key Note Segment		5 ft	72			
96008	104.5 to 116.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
96009	126.3 to 138.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
96010	139.3 to 141.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
96029	141.8 to 156.2 feet	Key Note Segment		5 ft	72			
95992	150.0 to 151.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
96011	157.0 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
96012	167.2 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
96013	180.3 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
96014	184.6 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
96030	197.9 to 212.5 feet	Key Note Segment		5 ft	73			
96015	213.9 to 228.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
96016	229.6 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
96017	238.7 to 242.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
96018	244.2 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
96031	246.3 to 268.9 feet	Key Note Segment		5 ft	113			
95993	255.4 to 256.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
96019	268.9 to 286.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	86	SF	$40	**$3,420**
95994	284.6 to 285.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
96020	286.7 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
96021	301.1 to 303.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121354	SHANNON AVE	RIVERVIEW DR	DRIFTWOOD DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96022	305.3 to 307.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
96023	321.1 to 347.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,660**
95995	335.8 to 336.8 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
95996	345.3 to 346.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95997	347.1 to 348.1 feet	**Vertical Change**	2.89"	5 ft	5	REF		
96024	347.8 to 353.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
95998	350.1 to 351.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
96025	353.6 to 356.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
96026	357.8 to 361.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
96027	361.0 to 386.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
95999	361.6 to 362.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
96000	374.5 to 375.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
96032	384.2 to 387.2 feet		5.0-6.0%	5 ft	15			
96033	384.2 to 387.2 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
96001	387.2 to 388.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SHANNON AVE** *Starting at:* **RIVERVIEW DR** **$124,785.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121350	SHANNON AVE	SEAHORSE CT	RIVERVIEW DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95936	0.2 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
95937	12.0 to 23.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
95938	26.6 to 51.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,820**
95939	54.1 to 68.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
95940	68.4 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,260**
95941	76.0 to 94.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,920**
95918	93.8 to 94.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
95942	96.9 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
95943	100.0 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
95979	109.0 to 123.0 feet	Key Note Segment		5 ft	70			
95944	123.0 to 124.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
95945	126.4 to 138.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
95919	130.6 to 131.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
95946	138.1 to 140.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
95947	143.8 to 145.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
95948	148.3 to 155.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,380**
95949	156.2 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
95950	171.5 to 175.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
95920	175.1 to 176.1 feet	**Vertical Change**	2.49"	5 ft	5	REF		
95980	176.1 to 200.0 feet	Key Note Segment		5 ft	120			
95921	192.8 to 193.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
95922	200.5 to 201.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
95951	244.3 to 245.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
95981	246.2 to 269.2 feet	Key Note Segment		5 ft	115			
95923	255.8 to 256.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
95924	275.1 to 276.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
95952	280.4 to 281.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
95982	281.6 to 295.6 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121350	SHANNON AVE	SEAHORSE CT	RIVERVIEW DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95953	296.3 to 306.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	$2,020
95954	308.7 to 310.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
95955	310.9 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,780
95925	328.3 to 329.3 feet	Vertical Change	1.09"	5 ft	5	REF		
95926	342.7 to 343.7 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
95956	350.3 to 356.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
95983	356.0 to 371.3 feet	Key Note Segment		5 ft	77			
95957	371.3 to 372.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$300
95958	374.0 to 378.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
95959	381.3 to 386.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
95927	386.4 to 387.4 feet	Vertical Change	1.72"	5 ft	5	SF	$75	$375
95984	387.5 to 401.3 feet	Key Note Segment		5 ft	69			
95928	395.1 to 396.1 feet	Vertical Change	.27"	5 ft	5	REF		
95929	401.9 to 402.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
95960	407.5 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
95961	413.4 to 430.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	$10,140
95962	432.8 to 436.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
95985	437.6 to 460.8 feet	Key Note Segment		5 ft	116			
95963	460.8 to 464.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$640
95930	461.6 to 462.6 feet	Vertical Change	.37"	5 ft	5	REF		
95964	466.8 to 484.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	$10,440
95965	484.4 to 488.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
95986	490.1 to 505.0 feet	Key Note Segment		5 ft	75			
95966	505.2 to 506.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
95931	505.6 to 506.6 feet	Vertical Change	-.34"	5 ft	5	REF		
95967	512.4 to 517.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
95968	523.9 to 531.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
95969	536.9 to 540.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121350	SHANNON AVE	SEAHORSE CT	RIVERVIEW DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95970	543.4 to 555.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
95933	549.3 to 550.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
95971	559.3 to 560.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
95987	560.5 to 584.1 feet	Key Note Segment		5 ft	118			
95934	570.6 to 571.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
95972	585.3 to 589.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
95973	594.1 to 595.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
95988	596.2 to 610.9 feet	Key Note Segment		5 ft	73			
95974	610.9 to 618.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	39	SF	$40	**$1,580**
95975	622.3 to 642.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
95976	642.9 to 647.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
95989	647.3 to 671.1 feet	Key Note Segment		5 ft	119			
95935	654.9 to 655.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
95977	673.6 to 675.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
95978	675.6 to 689.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
95990	678.5 to 680.3 feet		6.0-7.0%	5 ft	9			

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **SEAHORSE CT** **$185,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121339	SHANNON AVE	STARFISH CT	SEAHORSE CT	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95852	0.8 to 13.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,380**
95853	16.8 to 25.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	45	SF	$120	**$5,340**
95847	26.0 to 27.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
95854	26.8 to 73.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	233	SF	$120	**$27,960**
95848	52.6 to 53.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
95849	71.1 to 72.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
95855	73.4 to 75.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
95856	76.7 to 146.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	348	SF	$120	**$41,760**
95850	106.1 to 107.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95851	119.7 to 120.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
95857	146.6 to 147.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **STARFISH CT** **$84,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121235	SHANNON AVE	SUNSET AVE	VENTURI AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95104	0.9 to 1.9 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
95109	3.2 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
95110	6.1 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
95111	11.0 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
95112	14.0 to 19.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
95113	20.7 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
95131	28.2 to 52.0 feet	Key Note Segment		5 ft	119			
95114	53.1 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
95115	59.1 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
95116	65.9 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
95132	72.8 to 95.0 feet	Key Note Segment		5 ft	111			
95117	95.2 to 119.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	121	SF	$40	$4,820
95118	125.8 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
95105	132.9 to 133.9 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
95106	136.8 to 137.8 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
95119	141.8 to 175.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	$19,980
95133	175.8 to 196.6 feet	Key Note Segment		5 ft	104			
95120	197.8 to 199.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
95121	203.5 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
95122	209.4 to 221.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	$7,080
95134	223.5 to 224.8 feet		5.0-6.0%	5 ft	7			
95123	227.3 to 253.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	$15,900
95124	256.1 to 285.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	$17,400
95125	288.3 to 290.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
95126	293.3 to 294.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
95127	295.7 to 298.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
95128	298.6 to 330.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	160	SF	$120	$19,200
95108	331.4 to 332.4 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121235	SHANNON AVE	SUNSET AVE	VENTURI AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95129	334.6 to 345.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
95130	345.3 to 347.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **SUNSET AVE** **$120,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121239	SHANNON AVE	VENTURI AVE	LIGHTHOUSE DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95144	0.7 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
95145	4.9 to 9.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,700**
95146	12.0 to 17.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
95147	18.6 to 21.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,620**
95148	22.6 to 23.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
95149	24.1 to 26.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
95150	26.8 to 30.4 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	18	SF	$120	**$2,160**
95151	30.4 to 31.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
95152	33.3 to 34.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
95153	34.7 to 53.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	95	SF	$120	**$11,460**
95154	56.2 to 57.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
95155	57.2 to 61.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
95135	58.0 to 59.0 feet	**Vertical Change**	.46"	5 ft	5	REF		
95156	63.0 to 64.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
95157	65.4 to 81.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	**$9,360**
95158	81.0 to 85.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
95159	87.0 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
95160	93.5 to 94.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
95161	95.6 to 101.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
95162	102.2 to 103.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
95163	105.3 to 107.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
95164	108.4 to 122.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	70	SF	$120	**$8,340**
95136	122.7 to 123.7 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
95165	126.3 to 140.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
95137	139.6 to 140.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
95138	143.7 to 144.7 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
95139	146.4 to 147.4 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
95166	151.6 to 153.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121239	SHANNON AVE	VENTURI AVE	LIGHTHOUSE DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95174	153.5 to 173.8 feet	Key Note Segment		5 ft	102			
95167	174.0 to 177.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	**$660**
95168	178.8 to 186.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**
95169	187.3 to 191.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
95170	191.9 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
95171	197.3 to 198.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
95140	212.5 to 213.5 feet	Vertical Change	3.53"	5 ft	5	SF	$75	**$375**
95172	217.6 to 221.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
95175	225.8 to 256.3 feet	Key Note Segment		5 ft	153			
95141	233.5 to 234.5 feet	Vertical Change	.28"	5 ft	5	REF		
95142	251.6 to 252.6 feet	Vertical Change	.45"	5 ft	5	REF		
95143	255.4 to 256.4 feet	Vertical Change	-.32"	5 ft	5	REF		
95173	265.0 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **VENTURI AVE** **$85,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121331	SHANNON AVE	W PARK DR	STARFISH CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95774	0.0 to 13.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
95765	11.6 to 12.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
95775	15.9 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
95776	18.5 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
95777	24.3 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
95778	33.8 to 73.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	200	SF	$120	**$24,000**
95766	51.0 to 52.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
95767	65.5 to 66.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95786	75.3 to 92.6 feet	Key Note Segment		5 ft	87			
95779	93.8 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
95780	98.9 to 118.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
95768	105.4 to 106.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
95769	112.2 to 113.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
95781	120.4 to 128.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
95770	125.0 to 126.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
95782	130.5 to 132.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
95771	131.4 to 132.4 feet	**Vertical Change**	.55"	5 ft	5	REF		
95787	132.8 to 133.9 feet		5.0-6.0%	5 ft	5			
95772	134.4 to 135.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95783	134.5 to 135.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
95784	137.6 to 139.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
95785	139.3 to 156.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	87	SF	$120	**$10,440**
95773	157.5 to 158.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SHANNON AVE** *Starting at:* **W PARK DR** **$72,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111612	SHARON BVD	1930 SHARON BVD	1924 SHARON BVD	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133929	5.4 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	41	SF	$120	**$4,968**
133912	11.8 to 12.8 feet	**Vertical Change**	.26"	9 ft	9	LF	$75	**$675**
133930	13.4 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	43	SF	$120	**$5,184**
133931	20.4 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	16	SF	$120	**$1,944**
133913	24.8 to 25.8 feet	**Vertical Change**	.38"	9 ft	9	LF	$75	**$675**
133932	28.0 to 32.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	37	SF	$120	**$4,428**
133933	49.6 to 51.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	14	SF	$120	**$1,620**
133914	50.6 to 51.6 feet	**Vertical Change**	.26"	9 ft	9	REF		
133915	59.2 to 60.2 feet	**Vertical Change**	.31"	9 ft	9	LF	$75	**$675**
133916	63.5 to 64.5 feet	**Vertical Change**	.28"	9 ft	9	LF	$75	**$675**
133934	75.6 to 88.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	118	SF	$120	**$14,148**
133917	85.0 to 86.0 feet	**Vertical Change**	-.57"	9 ft	9	REF		
133935	91.7 to 93.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	13	SF	$120	**$1,512**
133936	110.3 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	76	SF	$120	**$9,072**
133937	124.9 to 136.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	100	SF	$120	**$11,988**
133938	147.6 to 157.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	89	SF	$120	**$10,692**
133939	160.0 to 179.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	178	SF	$40	**$7,128**
133918	171.6 to 172.6 feet	**Vertical Change**	-.3"	9 ft	9	REF		
133940	183.6 to 190.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	62	SF	$40	**$2,484**
133919	188.9 to 189.9 feet	**Vertical Change**	.36"	9 ft	9	REF		
133945	207.0 to 224.0 feet	Key Note Segment		9 ft	153			
133920	207.7 to 208.7 feet	**Vertical Change**	.27"	9 ft	9	REF		
133941	224.0 to 233.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	9 ft	83	SF	$40	**$3,312**
133921	225.9 to 226.9 feet	**Vertical Change**	.28"	9 ft	9	REF		
133942	237.4 to 240.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	27	SF	$120	**$3,240**
133943	249.6 to 272.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	209	SF	$120	**$25,056**
133922	251.0 to 252.0 feet	**Vertical Change**	-.29"	9 ft	9	REF		
133923	255.3 to 256.3 feet	**Vertical Change**	.34"	9 ft	9	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111612	SHARON BVD	1930 SHARON BVD	1924 SHARON BVD	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133924	259.6 to 260.6 feet	Vertical Change	.28"	9 ft	9	REF		
133925	268.3 to 269.3 feet	Vertical Change	-.28"	9 ft	9	REF		
133926	276.9 to 277.9 feet	Vertical Change	-.26"	9 ft	9	LF	$75	**$675**
133927	284.4 to 285.4 feet	Vertical Change	-.28"	9 ft	9	LF	$75	**$675**
133946	286.3 to 307.8 feet	Key Note Segment		9 ft	194			
133928	287.7 to 288.7 feet	Vertical Change	-.42"	9 ft	9	REF		
133944	310.7 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	10	SF	$120	**$1,188**

TOTAL COST FOR: W *side of* **SHARON BVD** *Starting at:* **1930 SHARON BVD** **$112,014.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111607	SHARON BVD	AVE 17	3174 AVENUE 17	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133863	0.9 to 1.9 feet	Vertical Change	-.45"	9 ft	9	LF	$75	$675
133871	3.6 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	361	SF	$120	$43,308
133872	47.8 to 55.5 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	69	SF	$120	$8,316
133873	55.5 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	57	SF	$120	$6,804
133874	66.7 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	377	SF	$120	$45,252
133864	107.5 to 108.5 feet	Vertical Change	2.54"	9 ft	9	REF		
133875	112.2 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	190	SF	$120	$22,788
133876	138.3 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	41	SF	$120	$4,860
133877	146.3 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	70	SF	$120	$8,424
133878	160.0 to 181.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	197	SF	$120	$23,652
133879	185.3 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	90	SF	$120	$10,800
133880	198.7 to 207.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	76	SF	$120	$9,072
133881	216.2 to 221.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	45	SF	$120	$5,400
133882	225.1 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	33	SF	$120	$3,996
133883	232.3 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	9	SF	$120	$1,080
133884	242.2 to 251.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	85	SF	$120	$10,152
133885	255.1 to 265.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	89	SF	$120	$10,692
133866	257.5 to 258.5 feet	Vertical Change	.27"	9 ft	9	REF		
133886	267.9 to 269.1 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	11	SF	$120	$1,296
133887	273.7 to 290.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	149	SF	$120	$17,820
133888	294.6 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	75	SF	$120	$8,964
133867	303.6 to 304.6 feet	Vertical Change	-.43"	9 ft	9	LF	$75	$675
133889	314.4 to 339.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	225	SF	$120	$27,000
133868	329.7 to 330.7 feet	Vertical Change	.31"	9 ft	9	REF		
133890	363.8 to 373.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	88	SF	$120	$10,584
133891	375.8 to 377.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	11	SF	$120	$1,296
133892	381.2 to 388.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	67	SF	$120	$7,992
133893	396.6 to 400.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	38	SF	$120	$4,536

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111607	SHARON BVD	AVE 17	3174 AVENUE 17	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133869	407.9 to 408.9 feet	Vertical Change	-.27"	9 ft	9	LF	$75	**$675**
133894	410.1 to 414.4 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	39	SF	$120	**$4,644**
133895	420.3 to 423.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	26	SF	$120	**$3,132**
133896	428.2 to 431.7 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	32	SF	$120	**$3,780**
133897	436.8 to 447.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	96	SF	$120	**$11,556**
133898	459.4 to 462.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	29	SF	$120	**$3,456**
133870	468.7 to 469.7 feet	Vertical Change	.27"	9 ft	9	LF	$75	**$675**
133899	472.9 to 475.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	22	SF	$120	**$2,592**

TOTAL COST FOR: W *side of* **SHARON BVD** *Starting at:* **AVE 17** **$325,944.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091447	SHARON BVD	COUNTRY CLUB DR	15865 SHARON BLVD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54787	0.0 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
54788	9.2 to 25.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
54800	25.3 to 58.9 feet	Key Note Segment		5 ft	168			
54777	26.2 to 27.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
54778	41.7 to 42.7 feet	**Vertical Change**	.56"	5 ft	5	REF		
54789	61.3 to 62.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
54790	62.8 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
54791	83.3 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
54792	108.2 to 120.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
54793	120.8 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
54794	133.3 to 144.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,420**
54779	143.0 to 144.0 feet	**Vertical Change**	3.14"	5 ft	5	REF		
54795	144.7 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
54780	147.7 to 148.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
54781	159.2 to 160.2 feet	**Vertical Change**	.78"	5 ft	5	SF	$75	**$375**
54782	160.9 to 161.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
54796	161.4 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
54783	171.9 to 172.9 feet	**Vertical Change**	.53"	5 ft	5	REF		
54784	175.9 to 176.9 feet	**Vertical Change**	3.42"	5 ft	5	SF	$75	**$375**
54797	177.1 to 178.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
54798	181.0 to 195.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
54799	195.9 to 216.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**
54785	210.5 to 213.2 feet	**Vertical Change**	.42"	5 ft	14	REF		
54786	214.2 to 215.2 feet	**Vertical Change**	1.12"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SHARON BVD** *Starting at:* **COUNTRY CLUB DR** **$97,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41697	0.8 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	86	SF	$120	**$10,272**
41698	17.3 to 26.1 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	70	SF	$120	**$8,448**
41699	27.3 to 38.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	91	SF	$120	**$10,944**
41700	41.2 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	21	SF	$120	**$2,496**
41701	47.3 to 60.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	105	SF	$120	**$12,576**
41655	48.8 to 49.8 feet	**Vertical Change**	-.26"	8 ft	8	REF		
41656	61.8 to 62.8 feet	**Vertical Change**	.48"	8 ft	8	LF	$75	**$600**
41702	63.2 to 78.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	126	SF	$120	**$15,072**
41703	78.9 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	126	SF	$120	**$15,072**
41704	100.0 to 113.7 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	110	SF	$120	**$13,152**
41705	114.2 to 125.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	92	SF	$120	**$11,040**
41706	127.9 to 138.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	87	SF	$120	**$10,464**
41707	139.1 to 140.5 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	11	SF	$120	**$1,344**
41708	141.3 to 142.3 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	8	SF	$120	**$960**
41709	143.6 to 157.9 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	114	SF	$120	**$13,728**
41710	158.8 to 163.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	35	SF	$120	**$4,224**
41711	163.6 to 191.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	225	SF	$120	**$26,976**
41657	181.5 to 182.5 feet	**Vertical Change**	-.38"	8 ft	8	REF		
41712	191.7 to 219.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	225	SF	$120	**$26,976**
41713	222.2 to 235.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	106	SF	$120	**$12,768**
41714	238.1 to 256.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	150	SF	$120	**$18,048**
41658	251.5 to 252.5 feet	**Vertical Change**	-.33"	8 ft	8	REF		
41715	257.3 to 263.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	52	SF	$120	**$6,240**
41716	268.1 to 288.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	165	SF	$120	**$19,776**
41659	268.8 to 269.8 feet	**Vertical Change**	.55"	8 ft	8	REF		
41660	289.9 to 290.9 feet	**Vertical Change**	-.27"	8 ft	8	LF	$75	**$600**
41717	291.7 to 293.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,248**
41718	293.4 to 301.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	65	SF	$120	**$7,776**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41719	301.9 to 303.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	11	SF	$120	**$1,344**
41720	307.7 to 313.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	45	SF	$120	**$5,376**
41721	316.0 to 340.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	195	SF	$120	**$23,424**
41722	341.7 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	89	SF	$120	**$10,656**
41723	355.8 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	59	SF	$120	**$7,104**
41724	371.2 to 379.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	65	SF	$120	**$7,776**
41725	383.3 to 385.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,728**
41726	388.9 to 400.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	95	SF	$120	**$11,424**
41727	403.8 to 413.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	79	SF	$120	**$9,504**
41728	416.8 to 425.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	72	SF	$120	**$8,640**
41729	428.7 to 434.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	42	SF	$120	**$5,088**
41730	434.0 to 442.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	65	SF	$120	**$7,776**
41731	442.8 to 459.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	134	SF	$120	**$16,128**
41732	465.8 to 471.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	43	SF	$120	**$5,184**
41733	474.2 to 478.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	35	SF	$120	**$4,224**
41661	475.5 to 476.5 feet	**Vertical Change**	.26"	8 ft	8	REF		
41734	479.1 to 503.5 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	195	SF	$120	**$23,424**
41735	503.7 to 507.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	29	SF	$120	**$3,456**
41736	507.8 to 522.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	116	SF	$120	**$13,920**
41737	525.8 to 527.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	15	SF	$120	**$1,824**
41738	527.7 to 536.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	66	SF	$120	**$7,968**
41662	528.2 to 529.2 feet	**Vertical Change**	.54"	8 ft	8	REF		
41739	536.3 to 544.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	64	SF	$120	**$7,680**
41740	544.3 to 546.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,208**
41741	549.5 to 558.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	68	SF	$120	**$8,160**
41742	558.0 to 586.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	230	SF	$120	**$27,648**
41663	588.4 to 589.4 feet	**Vertical Change**	-.26"	8 ft	8	LF	$75	**$600**
41743	596.9 to 613.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	132	SF	$120	**$15,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41664	605.7 to 606.7 feet	Vertical Change	-.26"	8 ft	8	REF		
41744	618.3 to 621.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	26	SF	$120	$3,168
41745	624.5 to 661.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	295	SF	$120	$35,424
41665	631.6 to 632.6 feet	Vertical Change	.69"	8 ft	8	REF		
41746	664.3 to 672.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	65	SF	$120	$7,776
41747	675.7 to 701.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	207	SF	$120	$24,864
41667	682.5 to 683.5 feet	Vertical Change	-.27"	8 ft	8	REF		
41748	707.8 to 726.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	146	SF	$120	$17,568
41668	717.0 to 718.0 feet	Vertical Change	-.3"	8 ft	8	REF		
41749	730.4 to 736.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	51	SF	$120	$6,144
41750	737.6 to 748.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	89	SF	$120	$10,656
41751	750.8 to 774.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	188	SF	$120	$22,560
41752	778.6 to 780.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	17	SF	$120	$2,016
41753	781.7 to 791.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	78	SF	$120	$9,408
41754	794.2 to 795.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	9	SF	$120	$1,056
41755	797.2 to 799.1 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	15	SF	$120	$1,824
41756	801.4 to 803.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	19	SF	$120	$2,304
41757	808.0 to 816.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	64	SF	$120	$7,680
41758	816.3 to 847.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	252	SF	$120	$30,240
41669	822.5 to 823.5 feet	Vertical Change	.35"	8 ft	8	REF		
41759	850.8 to 855.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	35	SF	$120	$4,224
41670	856.0 to 857.0 feet	Vertical Change	-.26"	8 ft	8	REF		
41760	856.8 to 859.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	$2,208
41761	861.6 to 875.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	113	SF	$120	$13,536
41671	872.5 to 873.5 feet	Vertical Change	-.28"	8 ft	8	REF		
41672	879.6 to 880.6 feet	Vertical Change	1.11"	8 ft	8	SF	$75	$600
41762	880.7 to 889.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	70	SF	$120	$8,448
41763	891.7 to 913.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	177	SF	$120	$21,216

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41764	916.3 to 941.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	204	SF	$120	**$24,480**
41765	942.6 to 951.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	70	SF	$120	**$8,352**
41673	943.2 to 944.2 feet	**Vertical Change**	.37"	8 ft	8	REF		
41766	953.5 to 973.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	161	SF	$120	**$19,296**
41767	977.3 to 980.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	24	SF	$120	**$2,880**
41768	981.1 to 994.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	106	SF	$120	**$12,672**
41769	997.8 to 999.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,344**
41770	1004.4 to 1008.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,648**
41771	1010.0 to 1021.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	93	SF	$120	**$11,136**
41674	1012.5 to 1013.5 feet	**Vertical Change**	.28"	8 ft	8	LF	$75	**$600**
41772	1021.8 to 1027.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	43	SF	$120	**$5,184**
41773	1032.7 to 1039.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	53	SF	$120	**$6,336**
41774	1045.6 to 1047.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,344**
41675	1047.8 to 1048.8 feet	**Vertical Change**	.3"	8 ft	8	REF		
41775	1048.0 to 1082.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	279	SF	$120	**$33,504**
41776	1085.3 to 1097.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	100	SF	$120	**$12,000**
41777	1098.4 to 1100.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	13	SF	$120	**$1,536**
41778	1103.4 to 1107.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	31	SF	$120	**$3,744**
41676	1105.6 to 1106.6 feet	**Vertical Change**	.36"	8 ft	8	REF		
41779	1107.3 to 1108.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,248**
41780	1109.5 to 1116.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,336**
41781	1119.3 to 1128.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	70	SF	$120	**$8,448**
41782	1128.1 to 1132.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	35	SF	$120	**$4,224**
41783	1136.4 to 1157.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	169	SF	$120	**$20,256**
41784	1160.4 to 1196.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	286	SF	$120	**$34,368**
41677	1185.0 to 1186.0 feet	**Vertical Change**	-.43"	8 ft	8	REF		
41785	1199.4 to 1203.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	34	SF	$120	**$4,032**
41786	1205.2 to 1238.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	270	SF	$120	**$32,352**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41678	1230.7 to 1231.7 feet	Vertical Change	.42"	8 ft	8	REF		
41787	1241.5 to 1249.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	66	SF	$120	$7,872
41679	1241.7 to 1242.7 feet	Vertical Change	-.27"	8 ft	8	REF		
41788	1249.7 to 1262.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	101	SF	$120	$12,096
41789	1264.4 to 1270.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	52	SF	$120	$6,240
41680	1272.1 to 1273.1 feet	Vertical Change	-.38"	8 ft	8	LF	$75	$600
41790	1275.2 to 1328.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	422	SF	$120	$50,688
41681	1297.6 to 1298.6 feet	Vertical Change	-.9"	8 ft	8	SF	$75	$600
41682	1305.7 to 1306.7 feet	Vertical Change	.26"	8 ft	8	REF		
41791	1331.2 to 1339.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	64	SF	$120	$7,680
41792	1345.5 to 1346.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	$1,344
41793	1349.5 to 1354.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	$4,320
41794	1357.3 to 1358.9 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	13	SF	$120	$1,536
41683	1358.0 to 1359.0 feet	Vertical Change	.9"	8 ft	8	REF		
41795	1362.5 to 1368.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	$5,952
41684	1375.1 to 1376.1 feet	Vertical Change	-.36"	8 ft	8	REF		
41796	1375.1 to 1396.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	167	SF	$120	$20,064
41685	1390.9 to 1391.9 feet	Vertical Change	.39"	8 ft	8	REF		
41797	1401.5 to 1403.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	$1,632
41798	1408.0 to 1411.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	$2,880
41686	1409.8 to 1410.8 feet	Vertical Change	.43"	8 ft	8	REF		
41799	1413.1 to 1425.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	102	SF	$120	$12,192
41800	1432.0 to 1436.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	$4,320
41801	1439.4 to 1441.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	$1,632
41687	1444.3 to 1445.3 feet	Vertical Change	-.31"	8 ft	8	LF	$75	$600
41802	1447.3 to 1452.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	38	SF	$120	$4,512
41803	1462.3 to 1481.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	156	SF	$120	$18,720
41804	1484.2 to 1488.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	37	SF	$120	$4,416

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41805	1493.8 to 1515.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	171	SF	$120	**$20,544**
41688	1496.7 to 1497.7 feet	Vertical Change	.67"	8 ft	8	SF	$75	**$600**
41806	1517.3 to 1520.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	22	SF	$120	**$2,688**
41807	1523.3 to 1548.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	200	SF	$120	**$24,000**
41808	1550.9 to 1568.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	143	SF	$120	**$17,184**
41809	1571.7 to 1580.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	73	SF	$120	**$8,736**
41810	1583.8 to 1590.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$5,952**
41811	1594.6 to 1598.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
41812	1600.5 to 1605.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,608**
41813	1605.7 to 1607.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,920**
41814	1620.5 to 1683.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	506	SF	$120	**$60,768**
41815	1684.7 to 1686.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	13	SF	$120	**$1,536**
41816	1692.8 to 1695.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	25	SF	$120	**$2,976**
41817	1695.9 to 1716.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	162	SF	$120	**$19,488**
41818	1717.1 to 1720.6 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	28	SF	$120	**$3,360**
41819	1721.6 to 1722.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
41820	1725.3 to 1727.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	16	SF	$120	**$1,920**
41821	1727.3 to 1731.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	36	SF	$120	**$4,320**
41822	1734.8 to 1739.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,032**
41823	1742.9 to 1744.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,344**
41824	1747.5 to 1755.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	67	SF	$120	**$8,064**
41825	1766.4 to 1768.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,632**
41826	1770.3 to 1771.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,248**
41689	1772.2 to 1773.2 feet	Vertical Change	.46"	8 ft	8	LF	$75	**$600**
41827	1777.2 to 1802.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	198	SF	$120	**$23,808**
41690	1789.5 to 1790.5 feet	Vertical Change	.33"	8 ft	8	REF		
41828	1804.3 to 1808.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	32	SF	$120	**$3,840**
41829	1809.6 to 1834.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	197	SF	$120	**$23,616**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41830	1836.3 to 1843.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	57	SF	$120	**$6,816**
41831	1845.6 to 1855.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	76	SF	$120	**$9,120**
41691	1857.8 to 1858.8 feet	**Vertical Change**	.32"	8 ft	8	LF	$75	**$600**
41832	1860.2 to 1869.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,832**
41833	1875.9 to 1906.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	242	SF	$120	**$28,992**
41692	1901.5 to 1902.5 feet	**Vertical Change**	.41"	8 ft	8	REF		
41834	1911.4 to 1927.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	126	SF	$120	**$15,168**
41835	1930.4 to 1932.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	18	SF	$120	**$2,208**
41836	1933.3 to 1935.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	16	SF	$120	**$1,920**
41693	1936.2 to 1937.2 feet	**Vertical Change**	-.28"	8 ft	8	LF	$75	**$600**
41837	1939.2 to 1941.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	19	SF	$120	**$2,304**
41838	1946.4 to 1952.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	51	SF	$120	**$6,144**
41839	1955.2 to 1958.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	29	SF	$120	**$3,456**
41840	1963.3 to 1973.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	79	SF	$120	**$9,504**
41694	1969.5 to 1970.5 feet	**Vertical Change**	-.34"	8 ft	8	REF		
41841	1974.2 to 1975.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	13	SF	$120	**$1,536**
41842	1979.8 to 1992.6 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	102	SF	$120	**$12,288**
41843	1994.3 to 1997.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	28	SF	$120	**$3,360**
41844	1998.3 to 2018.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	165	SF	$120	**$19,776**
41845	2019.2 to 2032.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	102	SF	$120	**$12,288**
41846	2034.4 to 2065.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	251	SF	$120	**$30,144**
41847	2066.1 to 2074.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	63	SF	$120	**$7,584**
41848	2074.5 to 2093.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	149	SF	$120	**$17,856**
41849	2095.5 to 2098.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	**$2,784**
41850	2101.2 to 2107.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	48	SF	$120	**$5,760**
41851	2115.7 to 2129.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	109	SF	$120	**$13,056**
41852	2129.8 to 2136.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,336**
41695	2130.4 to 2131.4 feet	**Vertical Change**	.68"	8 ft	8	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2105201614	SHARON BVD	E CLEVELAND AVE	RIVERSIDE DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41853	2139.8 to 2149.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	78	SF	$120	**$9,312**
41854	2151.3 to 2158.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	55	SF	$120	**$6,624**
41855	2161.4 to 2162.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	10	SF	$120	**$1,152**
41856	2165.1 to 2174.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	73	SF	$120	**$8,736**
41857	2175.6 to 2179.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	**$3,648**
41858	2183.8 to 2191.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	60	SF	$120	**$7,200**
41859	2194.1 to 2200.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$5,952**

TOTAL COST FOR: SW *side of* **SHARON BVD** *Starting at:* **E CLEVELAND AVE** **$1,675,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201536	SHARON BVD	E LINCOLN AVE	OWENS ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41526	0.0 to 10.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
41527	11.1 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
41528	22.8 to 26.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
41529	27.7 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
41530	35.1 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
41531	43.8 to 45.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
41532	45.0 to 46.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
41533	48.8 to 52.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **E LINCOLN AVE** **$27,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201545	SHARON BVD	HARDING AVE	WILSON AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41566	5.3 to 13.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
41567	17.3 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
41555	33.1 to 34.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
41556	41.2 to 44.8 feet	**Vertical Change**	.53"	5 ft	18	REF		
41568	44.1 to 50.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,660**
41557	48.0 to 49.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
41558	52.4 to 55.1 feet	**Vertical Change**	.27"	5 ft	14	REF		
41569	53.0 to 59.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
41570	60.8 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
41559	61.0 to 62.0 feet	**Vertical Change**	.62"	5 ft	5	REF		
41571	64.9 to 89.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$15,000**
41560	77.6 to 78.6 feet	**Vertical Change**	1.91"	5 ft	5	REF		
41572	90.6 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
41561	93.4 to 94.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
41587	97.7 to 111.0 feet	Key Note Segment		5 ft	67			
41562	109.7 to 110.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
41573	113.4 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41563	113.7 to 114.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
41574	117.7 to 138.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
41575	140.7 to 142.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
41576	145.3 to 146.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
41577	147.8 to 153.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
41588	155.0 to 172.8 feet	Key Note Segment		5 ft	89			
41564	156.6 to 157.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
41578	181.1 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
41589	186.7 to 206.9 feet	Key Note Segment		5 ft	101			
41579	206.9 to 209.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	12	SF	$40	**$480**
41580	212.9 to 231.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201545	SHARON BVD	HARDING AVE	WILSON AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41581	232.7 to 260.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
41590	260.9 to 280.0 feet	Key Note Segment		5 ft	96			
41565	262.8 to 263.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
41582	282.4 to 304.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,020**
41583	304.1 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
41584	312.9 to 316.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
41585	317.9 to 319.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
41586	322.1 to 324.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **HARDING AVE** **$121,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201540	SHARON BVD	OWENS ST	HARDING AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41538	0.8 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
41539	6.9 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
41540	24.2 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
41534	40.6 to 41.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
41541	45.3 to 59.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
41542	61.8 to 74.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
41535	68.5 to 69.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
41543	75.3 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
41544	86.1 to 87.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
41545	87.6 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41536	92.1 to 93.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
41546	96.7 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
41547	114.7 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
41548	123.2 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
41549	134.8 to 146.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
41550	146.9 to 166.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
41537	160.3 to 161.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
41551	167.9 to 184.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
41552	185.4 to 191.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
41553	191.8 to 194.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **OWENS ST** **$93,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111609	SHARON BVD	PARKING LOT ENTRANCE	PARKING LOT ENTRANCE	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133902	0.0 to 1.6 feet	Cross Slope (PAR)	3.0-4.0%	9 ft	14	SF	$120	**$1,728**
133903	2.6 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	38	SF	$120	**$4,536**
133904	10.3 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	158	SF	$120	**$19,008**
133905	37.8 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	185	SF	$120	**$22,140**
133906	73.2 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	175	SF	$120	**$20,952**
133907	95.2 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	61	SF	$120	**$7,344**
133900	107.1 to 108.1 feet	**Vertical Change**	.26"	9 ft	9	LF	$75	**$675**
133908	146.4 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	151	SF	$120	**$18,144**
133901	154.9 to 155.9 feet	**Vertical Change**	-.27"	9 ft	9	REF		
133909	166.9 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	35	SF	$120	**$4,212**
133910	173.9 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	58	SF	$120	**$6,912**
133911	192.6 to 196.5 feet	Cross Slope (PAR)	2.0-3.0%	9 ft	35	SF	$120	**$4,212**

TOTAL COST FOR: W *side of* **SHARON BVD** *Starting at:* **PARKING LOT ENTRANCE** **$109,863.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201528	SHARON BVD	RIVERSIDE DR	W SOUTH ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41452	0.3 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
41453	5.6 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
41446	8.9 to 9.9 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
41454	16.3 to 21.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
41447	25.2 to 26.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
41455	28.9 to 32.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
41456	32.6 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,920**
41448	53.9 to 54.9 feet	**Vertical Change**	1.73"	5 ft	5	REF		
41457	62.4 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
41458	73.3 to 74.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
41459	75.1 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
41460	90.0 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
41486	98.0 to 120.6 feet	Key Note Segment		5 ft	113			
41461	128.0 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
41462	135.1 to 136.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
41463	139.8 to 149.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
41464	153.8 to 155.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
41465	159.6 to 164.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
41466	166.8 to 169.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
41467	176.9 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
41468	199.3 to 211.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
41449	208.6 to 209.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
41469	214.5 to 222.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
41470	223.1 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
41450	229.5 to 230.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
41471	237.0 to 239.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
41472	243.0 to 252.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
41473	254.9 to 256.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201528	SHARON BVD	RIVERSIDE DR	W SOUTH ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41474	258.8 to 260.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
41475	260.2 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
41476	266.8 to 270.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
41487	272.8 to 292.0 feet	Key Note Segment		5 ft	96			
41477	296.8 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
41478	316.5 to 329.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
41479	333.6 to 337.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
41480	339.8 to 356.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
41481	359.8 to 362.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
41482	363.7 to 367.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
41483	375.8 to 384.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
41484	386.6 to 401.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
41485	403.4 to 415.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
41451	418.1 to 419.1 feet	**Vertical Change**	3.08"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **RIVERSIDE DR** **$155,565.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201533	SHARON BVD	W SOUTH ST	E LINCOLN AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41500	0.0 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
41501	9.1 to 37.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,860**
41502	37.2 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
41489	41.0 to 42.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
41503	46.8 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
41525	55.4 to 80.3 feet	Key Note Segment		5 ft	125			
41490	56.6 to 57.6 feet	**Vertical Change**	.54"	5 ft	5	REF		
41504	80.5 to 93.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	67	SF	$40	**$2,660**
41505	97.3 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
41506	107.4 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
41491	118.9 to 119.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
41507	122.1 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	376	SF	$120	**$45,060**
41492	145.2 to 146.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
41508	200.8 to 227.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
41509	228.0 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
41510	235.2 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
41493	236.6 to 237.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
41511	243.8 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
41512	250.3 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
41513	260.1 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,620**
41514	283.2 to 286.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
41515	291.1 to 312.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,660**
41516	316.0 to 331.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
41517	336.9 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
41494	353.6 to 354.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
41518	354.4 to 361.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
41519	363.8 to 396.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
41495	379.8 to 380.8 feet	**Vertical Change**	.32"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201533	SHARON BVD	W SOUTH ST	E LINCOLN AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41496	392.6 to 393.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
41520	397.3 to 408.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
41497	405.7 to 406.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
41521	408.7 to 429.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
41498	419.1 to 420.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
41499	432.2 to 433.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
41522	432.8 to 434.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
41523	437.9 to 441.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
41524	445.0 to 462.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **W SOUTH ST** **$215,015.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201550	SHARON BVD	WILSON AVE	E CLEVELAND AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41597	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
41598	2.5 to 32.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	151	SF	$120	**$18,180**
41599	33.0 to 47.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
41600	47.5 to 51.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
41601	51.8 to 98.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	233	SF	$120	**$27,900**
41602	101.5 to 113.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
41591	102.1 to 103.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
41603	119.7 to 135.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	77	SF	$120	**$9,180**
41604	137.9 to 142.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
41605	144.3 to 146.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
41619	147.6 to 168.3 feet	Key Note Segment		5 ft	104			
41592	167.8 to 171.2 feet	**Vertical Change**	-.33"	5 ft	17	REF		
41606	168.3 to 180.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	61	SF	$40	**$2,440**
41607	180.5 to 205.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,240**
41593	187.6 to 188.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
41608	209.6 to 263.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	271	SF	$120	**$32,460**
41594	263.0 to 264.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
41609	264.2 to 266.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
41610	283.0 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
41611	290.3 to 293.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
41595	291.7 to 292.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
41612	293.2 to 295.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
41613	297.6 to 298.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
41596	299.0 to 300.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
41614	302.5 to 307.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
41615	308.3 to 309.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
41616	312.3 to 313.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
41617	315.8 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2105201550	SHARON BVD	WILSON AVE	E CLEVELAND AVE	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
41618	320.6 to 322.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**

TOTAL COST FOR: NE *side of* **SHARON BVD** *Starting at:* **WILSON AVE** **$145,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151017	SHELLEY COVE	PAMELA DR	PAMELA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67763	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
67764	3.2 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
67765	7.7 to 11.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
67766	12.7 to 13.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67805	13.8 to 32.3 feet	Key Note Segment		5 ft	92			
67767	33.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
67768	44.3 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
67747	51.4 to 52.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
67806	63.1 to 78.3 feet	Key Note Segment		5 ft	76			
67769	81.8 to 82.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
67770	87.3 to 88.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67807	89.8 to 106.3 feet	Key Note Segment		5 ft	83			
67771	106.8 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67772	110.2 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
67773	114.1 to 115.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
67774	119.6 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
67775	132.8 to 135.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
67776	145.2 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
67808	157.7 to 173.6 feet	Key Note Segment		5 ft	80			
67748	166.9 to 167.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
67749	174.2 to 175.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
67777	179.7 to 183.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
67778	185.1 to 186.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
67779	186.8 to 188.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
67780	192.4 to 193.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67781	195.2 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
67809	205.3 to 232.1 feet	Key Note Segment		5 ft	134			
67750	216.8 to 217.8 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151017	SHELLEY COVE	PAMELA DR	PAMELA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67782	233.0 to 242.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
67810	242.8 to 261.3 feet	Key Note Segment		5 ft	93			
67751	253.3 to 254.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
67783	265.2 to 281.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
67811	281.8 to 299.5 feet	Key Note Segment		5 ft	89			
67753	293.2 to 294.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
67754	296.1 to 297.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
67812	307.6 to 324.3 feet	Key Note Segment		5 ft	83			
67756	309.8 to 310.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
67784	329.0 to 332.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
67813	339.7 to 357.6 feet	Key Note Segment		5 ft	90			
67785	363.0 to 388.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
67786	391.8 to 403.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
67787	403.5 to 404.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67788	408.8 to 411.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
67789	411.9 to 417.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
67757	416.4 to 417.4 feet	**Vertical Change**	.59"	5 ft	5	REF		
67790	417.1 to 418.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67814	418.9 to 433.6 feet	Key Note Segment		5 ft	74			
67758	427.6 to 428.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
67791	438.7 to 439.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
67792	442.4 to 443.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
67793	444.3 to 445.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67815	446.7 to 460.2 feet	Key Note Segment		5 ft	68			
67794	465.8 to 468.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
67795	471.2 to 480.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
67796	483.3 to 490.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
67797	490.8 to 506.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E / W	2109151017	SHELLEY COVE	PAMELA DR	PAMELA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67760	500.7 to 501.7 feet	Vertical Change	.34"	5 ft	5	REF		
67798	508.6 to 511.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
67816	514.8 to 529.0 feet	Key Note Segment		5 ft	71			
67761	530.8 to 531.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
67799	534.9 to 536.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$900
67800	538.8 to 540.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	$900
67817	543.8 to 557.8 feet	Key Note Segment		5 ft	70			
67762	550.9 to 551.9 feet	Vertical Change	.31"	5 ft	5	REF		
67801	563.0 to 565.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,380
67802	566.8 to 569.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	$1,500
67803	569.3 to 571.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,020
67804	572.7 to 574.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$780
67818	572.8 to 574.0 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E / W *side of* **SHELLEY COVE** *Starting at:* **PAMELA DR** **$123,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261304	SHORESIDE DR	1392 SHORESIDE DR	FRESHET DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109304	0.5 to 17.8 feet	Key Note Segment		5 ft	87			
109293	20.2 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
109294	48.1 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
109285	53.0 to 54.0 feet	**Vertical Change**	2.82"	5 ft	5	REF		
109295	56.9 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
109286	61.5 to 62.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
109296	64.6 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
109287	69.9 to 70.9 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
109297	75.3 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
109305	77.7 to 99.4 feet	Key Note Segment		5 ft	109			
109288	88.3 to 89.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
109298	101.4 to 113.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
109299	116.5 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
109306	138.3 to 158.2 feet	Key Note Segment		5 ft	99			
109289	149.6 to 150.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
109290	159.2 to 160.2 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
109300	160.9 to 162.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
109307	163.1 to 191.4 feet	Key Note Segment		5 ft	142			
109292	183.4 to 184.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
109301	193.5 to 195.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
109302	196.3 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
109303	201.6 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **SHORESIDE DR** *Starting at:* **1392 SHORESIDE DR** **$36,105.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261301	SHORESIDE DR	1422 SHORESIDE DR	1410 SHORESIDE DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109281	2.4 to 21.1 feet	Key Note Segment		5 ft	94			
109265	19.0 to 20.0 feet	Vertical Change	-.26"	5 ft	5	REF		
109271	24.8 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
109266	29.9 to 30.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
109272	31.5 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
109267	47.1 to 48.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
109273	50.4 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
109268	56.0 to 57.0 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
109274	77.0 to 79.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
109282	80.4 to 102.1 feet	Key Note Segment		5 ft	108			
109275	104.3 to 106.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
109283	109.8 to 137.4 feet	Key Note Segment		5 ft	138			
109269	136.3 to 137.3 feet	Vertical Change	3.1"	5 ft	5	REF		
109276	139.4 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
109277	150.8 to 160.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,760
109278	166.3 to 169.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
109279	178.1 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
109280	187.4 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
109284	189.2 to 209.6 feet	Key Note Segment		5 ft	102			
109270	199.1 to 200.1 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SHORESIDE DR** *Starting at:* **1422 SHORESIDE DR** **$21,885.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261330	SHORESIDE DR	FRESHET DR	RUNNING BROOK DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109451	2.0 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
109435	9.2 to 10.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
109472	16.8 to 36.8 feet	Key Note Segment		5 ft	100			
109436	27.4 to 28.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109452	38.8 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
109473	45.3 to 64.4 feet	Key Note Segment		5 ft	96			
109437	55.0 to 56.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
109453	66.1 to 67.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
109438	73.4 to 74.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109454	77.5 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
109455	96.1 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
109456	104.6 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109457	113.2 to 116.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
109474	116.0 to 146.3 feet	Key Note Segment		5 ft	152			
109439	125.6 to 126.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
109440	134.3 to 135.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
109475	152.1 to 170.9 feet	Key Note Segment		5 ft	94			
109458	173.6 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
109441	214.1 to 215.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
109459	221.5 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
109442	222.7 to 223.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
109476	230.8 to 250.9 feet	Key Note Segment		5 ft	101			
109443	252.2 to 253.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
109460	252.9 to 257.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
109477	258.2 to 278.3 feet	Key Note Segment		5 ft	101			
109461	279.8 to 296.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
109444	295.2 to 296.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109462	302.7 to 318.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261330	SHORESIDE DR	FRESHET DR	RUNNING BROOK DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109463	324.0 to 325.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
109478	337.9 to 357.3 feet	Key Note Segment		5 ft	97			
109464	359.6 to 361.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
109479	366.1 to 385.1 feet	Key Note Segment		5 ft	95			
109465	388.0 to 409.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
109466	414.5 to 426.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
109445	419.2 to 420.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109446	427.9 to 428.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
109467	429.2 to 432.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
109447	436.9 to 437.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
109468	438.0 to 439.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109480	444.4 to 464.3 feet	Key Note Segment		5 ft	100			
109449	451.0 to 452.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
109469	467.6 to 469.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
109470	469.2 to 472.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
109481	472.3 to 492.7 feet	Key Note Segment		5 ft	102			
109471	496.2 to 505.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
109450	508.8 to 509.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SHORESIDE DR** *Starting at:* **FRESHET DR** **$93,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261259	SHORESIDE DR	RUNNING BROOK DR	1422 SHORESIDE DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109256	9.0 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
109251	16.4 to 17.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
109262	17.1 to 36.7 feet	Key Note Segment		5 ft	98			
109257	38.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109263	45.6 to 64.3 feet	Key Note Segment		5 ft	94			
109258	66.3 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
109253	81.0 to 82.0 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
109259	82.2 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
109260	99.6 to 107.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
109261	113.9 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
109264	117.8 to 143.2 feet	Key Note Segment		5 ft	127			
109254	120.1 to 121.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
109255	129.3 to 130.3 feet	**Vertical Change**	.43"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SHORESIDE DR** *Starting at:* **RUNNING BROOK DR** **$18,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031108	SIERRA ST	911 SIERRA ST	919 SIERRA ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119629	10.2 to 11.2 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
119639	18.0 to 32.4 feet	Key Note Segment		5 ft	72			
119642	30.3 to 31.3 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
119632	33.9 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
119630	53.5 to 54.5 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
119633	60.4 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
119631	63.1 to 64.1 feet	Vertical Change	3.46"	5 ft	5	REF		
119640	63.8 to 78.7 feet	Key Note Segment		5 ft	75			
119634	81.0 to 85.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
119635	85.0 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
119636	99.1 to 103.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
119641	103.3 to 117.9 feet	Key Note Segment		5 ft	73			
119637	117.9 to 119.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$400
119638	122.6 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320

TOTAL COST FOR: E *side of* **SIERRA ST** *Starting at:* **911 SIERRA ST** **$10,549.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071508	SIERRA ST	E CLEVELAND AVE	119 SIERRA ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44203	1.8 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	111	SF	$120	**$13,320**
44204	23.3 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	180	SF	$120	**$21,600**
44215	53.3 to 64.6 feet	Key Note Segment		6 ft	68			
44205	64.8 to 72.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	6 ft	44	SF	$40	**$1,752**
44206	72.8 to 77.4 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	28	SF	$120	**$3,312**
44198	75.4 to 76.4 feet	**Vertical Change**	-.28"	6 ft	6	REF		
44216	77.6 to 94.7 feet	Key Note Segment		6 ft	103			
44199	89.5 to 90.5 feet	**Vertical Change**	.27"	6 ft	6	REF		
44207	95.5 to 98.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	17	SF	$120	**$2,016**
44200	96.0 to 97.0 feet	**Vertical Change**	.3"	6 ft	6	REF		
44208	98.4 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
44201	103.1 to 104.1 feet	**Vertical Change**	.34"	6 ft	6	LF	$75	**$450**
44202	109.0 to 110.0 feet	**Vertical Change**	.34"	6 ft	6	LF	$75	**$450**
44209	110.4 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,456**
44210	117.6 to 118.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$864**
44211	120.0 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
44212	126.5 to 137.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	66	SF	$120	**$7,920**
44217	140.2 to 167.7 feet	Key Note Segment		6 ft	165			
44213	167.8 to 179.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	71	SF	$40	**$2,832**
44214	183.3 to 185.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**

TOTAL COST FOR: E *side of* **SIERRA ST** *Starting at:* **E CLEVELAND AVE** **$63,588.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081300	SIXTH ST	ALLEY	S H ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45609	0.0 to 9.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
45610	11.9 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45611	18.3 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
45612	28.5 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
45613	69.0 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
45614	75.7 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
45615	83.2 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
45616	93.1 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
45617	107.8 to 113.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
45618	114.4 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
45619	127.3 to 128.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: SE *side of* **SIXTH ST** *Starting at:* **ALLEY** **$60,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081312	SIXTH ST	S G ST	S GATEWAY DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45665	0.8 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
45666	6.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
45667	10.1 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
45668	16.4 to 20.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
45669	21.0 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
45670	27.3 to 39.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
45671	39.8 to 46.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
45672	46.9 to 49.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
45673	52.1 to 60.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
45674	61.9 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
45675	76.8 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
45685	102.5 to 143.5 feet	Key Note Segment		5 ft	205			
45676	148.2 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
45677	160.8 to 193.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,860**
45664	187.1 to 188.1 feet	**Vertical Change**	.99"	5 ft	5	REF		
45678	198.7 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
45679	204.9 to 228.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
45680	230.1 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
45681	241.8 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
45682	247.9 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
45683	259.8 to 261.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
45684	265.2 to 267.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: SE *side of* **SIXTH ST** *Starting at:* **S G ST** **$103,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081631	SIXTH ST	S GATEWAY DR	S H ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46585	0.1 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
46586	2.1 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
46587	21.8 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
46588	29.9 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
46589	41.3 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	27	SF	$120	**$3,240**
46590	45.8 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	86	SF	$120	**$10,368**
46576	57.0 to 58.0 feet	**Vertical Change**	.27"	6 ft	6	REF		
46577	74.1 to 75.1 feet	**Vertical Change**	-.3"	6 ft	6	LF	$75	**$450**
46591	80.8 to 87.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
46592	90.1 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
46593	103.8 to 109.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
46578	108.5 to 109.5 feet	**Vertical Change**	.34"	6 ft	6	REF		
46594	122.0 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
46579	134.2 to 135.2 feet	**Vertical Change**	.27"	6 ft	6	LF	$75	**$450**
46580	138.8 to 139.8 feet	**Vertical Change**	-.91"	6 ft	6	SF	$75	**$450**
46595	150.8 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,376**
46581	159.9 to 160.9 feet	**Vertical Change**	.3"	6 ft	6	LF	$75	**$450**
46596	161.6 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
46582	166.4 to 167.4 feet	**Vertical Change**	.32"	6 ft	6	LF	$75	**$450**
46583	194.6 to 195.6 feet	**Vertical Change**	.3"	6 ft	6	LF	$75	**$450**
46597	199.7 to 206.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	40	SF	$120	**$4,752**
46617	206.3 to 222.4 feet	Key Note Segment		6 ft	97			
46598	223.1 to 224.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,224**
46599	225.1 to 239.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	86	SF	$120	**$10,368**
46600	244.9 to 246.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
46584	266.2 to 267.2 feet	**Vertical Change**	-.41"	6 ft	6	LF	$75	**$450**
46601	271.9 to 275.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	22	SF	$120	**$2,664**
46602	309.7 to 311.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081631	SIXTH ST	S GATEWAY DR	S H ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46618	318.7 to 339.7 feet	Key Note Segment		6 ft	126			
46603	360.4 to 365.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
46604	370.3 to 375.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,816**
46605	376.3 to 401.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	150	SF	$120	**$18,000**
46606	401.3 to 402.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
46607	417.5 to 428.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	68	SF	$120	**$8,136**
46608	476.4 to 478.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
46609	516.0 to 517.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
46610	522.0 to 527.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,744**
46611	533.3 to 535.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,512**
46612	541.7 to 549.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
46613	551.5 to 554.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
46614	571.6 to 575.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	**$2,520**
46615	578.8 to 580.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
46616	588.2 to 599.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	67	SF	$120	**$8,064**

TOTAL COST FOR: NW *side of* **SIXTH ST** *Starting at:* **S GATEWAY DR** **$125,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081308	SIXTH ST	S H ST	S G ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45653	2.7 to 12.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	58	SF	$120	**$6,984**
45654	19.2 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	436	SF	$120	**$52,344**
45645	95.0 to 96.0 feet	**Vertical Change**	-.64"	6 ft	6	SF	$75	**$450**
45655	100.3 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
45656	108.9 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,968**
45646	118.2 to 119.2 feet	**Vertical Change**	-.78"	6 ft	6	SF	$75	**$450**
45657	119.4 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
45647	133.7 to 134.7 feet	**Vertical Change**	-.64"	6 ft	6	SF	$75	**$450**
45648	141.4 to 142.4 feet	**Vertical Change**	-.46"	6 ft	6	LF	$75	**$450**
45649	149.2 to 150.2 feet	**Vertical Change**	-.5"	6 ft	6	SF	$75	**$450**
45658	151.2 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,472**
45659	163.0 to 172.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	58	SF	$120	**$6,912**
45650	164.7 to 165.7 feet	**Vertical Change**	-.6"	6 ft	6	REF		
45660	177.8 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
45661	187.1 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
45662	191.2 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
45651	203.3 to 204.3 feet	**Vertical Change**	-.27"	6 ft	6	LF	$75	**$450**
45663	204.6 to 261.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	343	SF	$120	**$41,184**
45652	211.1 to 212.1 feet	**Vertical Change**	-.39"	6 ft	6	REF		

TOTAL COST FOR: SE *side of* **SIXTH ST** *Starting at:* **S H ST** **$132,948.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2106081258	SIXTH ST	S I ST	205 S I ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
45602	22.3 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
45603	41.0 to 49.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
45604	53.7 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
45605	67.4 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
45601	79.0 to 80.0 feet	**Vertical Change**	1.41"	5 ft	5	SF	$75	**$375**
45606	95.7 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
45607	110.8 to 115.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
45608	123.1 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: SE *side of* **SIXTH ST** *Starting at:* **S I ST** **$18,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131028	SOLANO ST	CARMEL ST	SAURET ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61610	0.0 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
61611	6.1 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
61612	77.3 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61613	81.8 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
61609	85.0 to 86.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
61614	102.7 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
61615	114.4 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
61616	121.0 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
61617	125.1 to 126.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **SOLANO ST** *Starting at:* **CARMEL ST** **$17,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131005	SOLANO ST	LOS ARCOS LN	MILOW ST	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61460	2.7 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
61461	11.8 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61462	21.3 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
61463	40.6 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
61464	57.8 to 59.2 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **SOLANO ST** *Starting at:* **LOS ARCOS LN** **$18,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131026	SOLANO ST	MILOW ST	CARMEL ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61604	2.8 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
61605	9.0 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
61603	9.6 to 10.6 feet	**Vertical Change**	-.38"	5 ft	5	REF		
61606	34.9 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
61607	40.9 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
61608	134.5 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: E *side of* **SOLANO ST** *Starting at:* **MILOW ST** **$12,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131211	SOLANO ST	PADRE ST	LOS ARCOS LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62375	4.3 to 20.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	79	SF	$120	**$9,420**
62349	11.7 to 12.7 feet	**Vertical Change**	.57"	5 ft	5	REF		
62376	62.8 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
62350	63.5 to 64.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
62377	76.1 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
62416	83.3 to 105.0 feet	Key Note Segment		5 ft	109			
62378	106.4 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
62379	113.0 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
62351	114.2 to 115.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
62417	126.3 to 148.3 feet	Key Note Segment		5 ft	110			
62352	127.5 to 128.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
62353	137.8 to 138.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
62380	148.8 to 152.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
62418	153.6 to 175.0 feet	Key Note Segment		5 ft	107			
62381	175.5 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
62354	186.4 to 187.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
62382	204.0 to 206.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
62383	208.7 to 211.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
62355	209.4 to 210.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
62419	212.9 to 234.4 feet	Key Note Segment		5 ft	108			
62356	224.0 to 225.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
62420	239.0 to 259.8 feet	Key Note Segment		5 ft	104			
62384	260.1 to 269.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
62358	264.1 to 265.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
62359	272.6 to 273.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
62385	294.6 to 298.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
62421	298.2 to 320.4 feet	Key Note Segment		5 ft	111			
62360	309.8 to 310.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131211	SOLANO ST	PADRE ST	LOS ARCOS LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62422	324.7 to 345.8 feet	Key Note Segment		5 ft	106			
62361	335.6 to 336.6 feet	Vertical Change	.28"	5 ft	5	REF		
62386	372.3 to 382.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
62423	384.2 to 407.0 feet	Key Note Segment		5 ft	114			
62387	407.8 to 409.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
62424	410.3 to 432.4 feet	Key Note Segment		5 ft	111			
62362	411.2 to 412.2 feet	Vertical Change	.27"	5 ft	5	REF		
62363	431.6 to 432.6 feet	Vertical Change	.37"	5 ft	5	REF		
62388	434.8 to 441.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
62389	443.6 to 451.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
62390	454.1 to 456.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
62391	461.4 to 467.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
62364	465.4 to 466.4 feet	Vertical Change	.29"	5 ft	5	REF		
62392	468.5 to 484.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,300
62425	484.0 to 506.0 feet	Key Note Segment		5 ft	110			
62365	487.7 to 488.7 feet	Vertical Change	-.41"	5 ft	5	REF		
62366	495.2 to 496.2 feet	Vertical Change	-.31"	5 ft	5	REF		
62367	502.6 to 506.3 feet	Vertical Change	.46"	5 ft	19	REF		
62393	506.0 to 509.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$660
62426	509.3 to 531.4 feet	Key Note Segment		5 ft	111			
62368	520.4 to 521.4 feet	Vertical Change	.29"	5 ft	5	REF		
62394	532.1 to 540.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,800
62395	540.7 to 542.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
62369	542.0 to 543.0 feet	Vertical Change	-.31"	5 ft	5	REF		
62396	572.4 to 586.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
62427	586.7 to 608.3 feet	Key Note Segment		5 ft	108			
62397	609.9 to 613.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
62428	613.3 to 634.1 feet	Key Note Segment		5 ft	104			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131211	SOLANO ST	PADRE ST	LOS ARCOS LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62398	637.6 to 648.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
62399	650.2 to 662.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
62400	665.1 to 690.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
62429	690.8 to 709.8 feet	Key Note Segment		5 ft	95			
62430	715.8 to 739.1 feet	Key Note Segment		5 ft	117			
62370	726.9 to 727.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
62401	739.8 to 747.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
62402	749.2 to 752.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
62371	752.2 to 753.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
62403	777.8 to 779.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
62372	783.3 to 784.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
62404	785.4 to 793.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
62431	793.7 to 815.3 feet	Key Note Segment		5 ft	108			
62405	816.5 to 819.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
62432	819.7 to 841.8 feet	Key Note Segment		5 ft	111			
62406	843.8 to 845.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
62407	849.6 to 853.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
62408	853.5 to 855.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
62409	866.7 to 868.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
62410	868.9 to 870.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
62411	872.8 to 878.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
62412	879.3 to 883.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
62413	883.8 to 889.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
62433	896.5 to 918.2 feet	Key Note Segment		5 ft	109			
62373	908.2 to 909.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
62414	919.0 to 923.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
62434	923.2 to 944.4 feet	Key Note Segment		5 ft	106			
62415	946.6 to 967.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108131211	SOLANO ST	PADRE ST	LOS ARCOS LN	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62374	952.1 to 953.1 feet	Vertical Change	.3"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SOLANO ST** *Starting at:* **PADRE ST** **$173,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131203	SOLANO ST	SAURET ST	PADRE ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62324	0.0 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
62313	8.3 to 9.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
62341	19.1 to 40.4 feet	Key Note Segment		5 ft	106			
62314	29.7 to 30.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
62315	40.1 to 41.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
62325	41.2 to 42.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
62326	42.3 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
62342	45.5 to 67.1 feet	Key Note Segment		5 ft	108			
62327	69.9 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
62328	83.9 to 85.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
62329	88.3 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
62330	102.3 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
62343	104.7 to 127.4 feet	Key Note Segment		5 ft	114			
62331	128.4 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
62344	131.3 to 152.2 feet	Key Note Segment		5 ft	104			
62316	141.9 to 142.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
62317	151.9 to 152.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
62332	153.7 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
62318	161.0 to 162.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
62333	162.1 to 171.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
62334	173.9 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
62319	180.7 to 181.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
62335	183.6 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
62345	190.9 to 213.1 feet	Key Note Segment		5 ft	111			
62336	215.1 to 216.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
62346	216.9 to 238.9 feet	Key Note Segment		5 ft	110			
62320	228.1 to 229.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
62337	240.8 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131203	SOLANO ST	SAURET ST	PADRE ST	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62321	246.1 to 247.1 feet	Vertical Change	-.3"	5 ft	5	REF		
62347	277.3 to 298.9 feet	Key Note Segment		5 ft	108			
62338	299.7 to 303.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
62348	303.2 to 325.1 feet	Key Note Segment		5 ft	110			
62322	314.4 to 315.4 feet	Vertical Change	.27"	5 ft	5	REF		
62339	326.0 to 327.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
62323	334.9 to 335.9 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**
62340	338.0 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**

TOTAL COST FOR: E *side of* **SOLANO ST** *Starting at:* **SAURET ST** **$72,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031127	SONORA ST	1004 SONORA ST	E RUSH ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119723	1.1 to 8.9 feet	Key Note Segment		5 ft	39			
119719	6.0 to 7.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
119722	27.8 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,500**
119720	31.7 to 32.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
119721	40.4 to 41.4 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **1004 SONORA ST** **$7,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031229	SONORA ST	710 SONORA ST	RIVERSIDE DR	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120035	2.7 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
120027	13.5 to 14.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
120036	22.9 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
120047	30.3 to 43.1 feet	Key Note Segment		5 ft	64			
120028	43.3 to 44.3 feet	**Vertical Change**	.94"	5 ft	5	REF		
120037	68.8 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
120048	71.3 to 83.9 feet	Key Note Segment		5 ft	63			
120029	71.6 to 75.5 feet	**Vertical Change**	.33"	5 ft	20	REF		
120038	85.6 to 87.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
120039	89.5 to 90.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
120040	92.8 to 95.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
120041	99.1 to 112.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,100**
120042	112.8 to 116.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,460**
120043	118.7 to 119.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
120049	119.9 to 132.0 feet	Key Note Segment		5 ft	61			
120044	132.9 to 151.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
120031	137.4 to 138.4 feet	**Vertical Change**	1.19"	5 ft	5	REF		
120032	143.8 to 144.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
120045	154.6 to 159.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
120046	160.4 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
120033	167.7 to 168.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
120034	171.9 to 172.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **710 SONORA ST** **$51,255.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031135	SONORA ST	904 SONORA ST	E LINCOLN AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119746	2.1 to 15.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	106	SF	$120	**$12,768**
119747	18.8 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	44	SF	$120	**$5,280**
119748	27.8 to 34.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	52	SF	$120	**$6,240**
119749	34.5 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	157	SF	$120	**$18,816**
119750	54.1 to 57.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	30	SF	$120	**$3,648**
119751	57.9 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	11	SF	$120	**$1,344**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **904 SONORA ST** **$48,096.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031132	SONORA ST	918 SONORA ST	916 SONORA ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119744	2.7 to 16.6 feet	Key Note Segment		5 ft	70			
119737	3.2 to 4.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
119738	17.6 to 18.6 feet	**Vertical Change**	3.37"	5 ft	5	SF	$75	**$375**
119742	25.0 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
119743	39.8 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
119739	49.4 to 50.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
119745	63.1 to 76.5 feet	Key Note Segment		5 ft	67			
119740	63.5 to 64.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119741	67.5 to 68.5 feet	**Vertical Change**	1.35"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **918 SONORA ST** **$8,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031120	SONORA ST	921 SONORA ST	929 SONORA ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119699	0.6 to 12.8 feet	Key Note Segment		6 ft	73			
119692	12.5 to 13.5 feet	Vertical Change	.3"	6 ft	6	REF		
119695	13.3 to 17.5 feet	Cross Slope (Driveway)	5.0-6.0%	6 ft	25	SF	$40	**$1,008**
119693	17.4 to 18.4 feet	Vertical Change	-.34"	6 ft	6	REF		
119696	20.5 to 25.0 feet	Cross Slope (PAR)	9.0-10.0%	6 ft	27	SF	$120	**$3,240**
119697	27.9 to 29.4 feet	Cross Slope (PAR)	8.0-9.0%	6 ft	9	SF	$120	**$1,080**
119694	35.2 to 36.2 feet	Vertical Change	1.67"	6 ft	6	REF		
119698	35.8 to 39.3 feet	Cross Slope (PAR)	7.0-8.0%	6 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: E *side of* **SONORA ST** *Starting at:* **921 SONORA ST** **$7,848.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311124	SONORA ST	ADELL ST	SUSAN LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114504	0.0 to 4.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
114505	7.0 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	$6,540
114506	18.8 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,340
114507	29.6 to 34.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,120
114508	35.4 to 36.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
114509	37.4 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	$20,040
114510	73.8 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
114511	89.0 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,680
114499	102.4 to 103.4 feet	Vertical Change	.62"	5 ft	5	SF	$75	$375
114512	105.4 to 109.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
114513	117.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	$15,000
114514	152.7 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	$6,840
114500	153.5 to 154.5 feet	Vertical Change	.27"	5 ft	5	REF		
114501	162.1 to 163.1 feet	Vertical Change	.3"	5 ft	5	REF		
114525	166.9 to 189.3 feet	Key Note Segment		5 ft	112			
114502	179.7 to 180.7 feet	Vertical Change	.26"	5 ft	5	REF		
114515	198.5 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	$16,080
114516	230.9 to 232.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
114517	233.3 to 266.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	$19,800
114518	269.3 to 271.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
114519	271.5 to 274.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
114520	277.1 to 279.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
114521	284.0 to 299.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	$9,420
114503	293.7 to 294.7 feet	Vertical Change	-.28"	5 ft	5	REF		
114522	301.8 to 305.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
114523	305.8 to 317.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,140
114524	322.4 to 344.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	$13,140

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **ADELL ST** **$150,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311232	SONORA ST	ASHLAN WAY	LYNN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115054	4.9 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
115106	9.3 to 10.3 feet	Protruding Object	60"	4 ft	4	JOB	$99	**$99**
115055	19.6 to 20.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	**$576**
115056	23.3 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
115029	27.7 to 28.7 feet	Vertical Change	.29"	4 ft	4	REF		
115093	28.2 to 41.9 feet	Key Note Segment		4 ft	55			
115030	46.4 to 47.4 feet	Vertical Change	1.34"	4 ft	4	REF		
115057	47.0 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
115058	59.3 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
115031	63.8 to 64.8 feet	Vertical Change	.28"	4 ft	4	LF	$75	**$300**
115059	74.0 to 79.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
115094	80.6 to 94.3 feet	Key Note Segment		4 ft	55			
115032	82.7 to 83.7 feet	Vertical Change	1.59"	4 ft	4	REF		
115033	95.0 to 96.0 feet	Vertical Change	.28"	4 ft	4	REF		
115060	95.9 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
115034	119.5 to 120.5 feet	Vertical Change	.41"	4 ft	4	LF	$75	**$300**
115095	134.3 to 147.9 feet	Key Note Segment		4 ft	54			
115035	135.1 to 136.1 feet	Vertical Change	-.36"	4 ft	4	REF		
115036	148.9 to 149.9 feet	Vertical Change	.29"	4 ft	4	REF		
115061	149.2 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
115096	164.2 to 177.8 feet	Key Note Segment		4 ft	54			
115062	177.8 to 196.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	76	SF	$40	**$3,040**
115063	200.6 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
115037	213.4 to 214.4 feet	Vertical Change	-.36"	4 ft	4	LF	$75	**$300**
115064	221.9 to 233.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,568**
115065	235.6 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**
115097	242.8 to 256.3 feet	Key Note Segment		4 ft	54			
115038	243.3 to 244.3 feet	Vertical Change	-.26"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311232	SONORA ST	ASHLAN WAY	LYNN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115039	250.3 to 251.3 feet	Vertical Change	.27"	4 ft	4	REF		
115066	256.6 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	$7,680
115098	275.7 to 289.7 feet	Key Note Segment		4 ft	56			
115040	289.0 to 290.0 feet	Vertical Change	1.58"	4 ft	4	REF		
115067	289.7 to 308.7 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	76	SF	$40	$3,040
115068	312.3 to 313.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	$576
115069	313.9 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,152
115107	316.0 to 317.0 feet	Protruding Object	60"	4 ft	4	JOB	$99	$99
115041	321.2 to 323.9 feet	Vertical Change	.35"	4 ft	11	LF	$75	$810
115099	346.8 to 360.5 feet	Key Note Segment		4 ft	55			
115042	347.7 to 348.7 feet	Vertical Change	-.85"	4 ft	4	REF		
115043	361.5 to 362.5 feet	Vertical Change	.3"	4 ft	4	LF	$75	$300
115070	375.9 to 378.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	$1,056
115100	379.7 to 394.4 feet	Key Note Segment		4 ft	59			
115044	380.9 to 381.9 feet	Vertical Change	-.35"	4 ft	4	REF		
115071	394.4 to 395.6 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	5	SF	$40	$192
115072	400.1 to 404.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	$2,016
115073	410.1 to 412.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	$1,056
115074	417.3 to 428.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	$5,376
115108	426.8 to 427.8 feet	Protruding Object	72"	4 ft	4	JOB	$99	$99
115045	427.7 to 428.7 feet	Vertical Change	.42"	4 ft	4	REF		
115075	431.0 to 432.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	$624
115046	431.7 to 432.7 feet	Vertical Change	.4"	4 ft	4	REF		
115076	442.6 to 458.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	$7,488
115101	458.7 to 471.9 feet	Key Note Segment		4 ft	53			
115047	459.4 to 460.4 feet	Vertical Change	1.27"	4 ft	4	REF		
115077	471.9 to 477.3 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	22	SF	$40	$864
115078	477.3 to 488.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	46	SF	$120	$5,520

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311232	SONORA ST	ASHLAN WAY	LYNN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115102	491.8 to 505.7 feet	Key Note Segment		4 ft	56			
115048	492.7 to 493.7 feet	Vertical Change	-.5"	4 ft	4	REF		
115079	509.5 to 514.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,352**
115080	514.8 to 533.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	75	SF	$120	**$8,976**
115081	535.7 to 537.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
115082	540.0 to 566.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	107	SF	$120	**$12,816**
115103	566.8 to 580.6 feet	Key Note Segment		4 ft	55			
115049	572.5 to 573.5 feet	Vertical Change	.27"	4 ft	4	REF		
115083	580.6 to 588.3 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	31	SF	$40	**$1,232**
115050	581.4 to 582.4 feet	Vertical Change	-.41"	4 ft	4	REF		
115084	591.5 to 593.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
115085	593.0 to 594.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
115104	600.7 to 614.8 feet	Key Note Segment		4 ft	56			
115051	601.5 to 602.5 feet	Vertical Change	-.32"	4 ft	4	REF		
115086	615.3 to 621.0 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	23	SF	$40	**$912**
115087	621.6 to 625.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
115088	627.3 to 643.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	65	SF	$120	**$7,824**
115052	640.7 to 641.7 feet	Vertical Change	-.26"	4 ft	4	REF		
115105	643.8 to 668.1 feet	Key Note Segment		4 ft	97			
115053	669.0 to 670.0 feet	Vertical Change	.26"	4 ft	4	REF		
115089	669.7 to 673.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
115090	673.3 to 681.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,792**
115091	682.1 to 683.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
115092	685.6 to 693.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,888**

TOTAL COST FOR: E *side of* **SONORA ST** *Starting at:* **ASHLAN WAY** **$124,723.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031125	SONORA ST	E RUSH ST	1005 SONORA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119716	0.3 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
119718	9.8 to 23.3 feet	Key Note Segment		5 ft	67			
119714	10.8 to 11.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119715	25.7 to 26.7 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
119717	35.4 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**

TOTAL COST FOR: E *side of* **SONORA ST** *Starting at:* **E RUSH ST** **$8,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311147	SONORA ST	JOSEPH LN	W CLARK ST	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114718	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
114719	2.1 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
114730	15.3 to 16.3 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
114705	24.5 to 25.5 feet	Vertical Change	.26"	5 ft	5	REF		
114731	42.8 to 43.8 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
114707	46.4 to 47.4 feet	Vertical Change	1.58"	5 ft	5	SF	$75	**$375**
114720	49.5 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
114732	54.6 to 55.6 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
114708	59.4 to 60.4 feet	Vertical Change	-.95"	5 ft	5	SF	$75	**$375**
114721	61.0 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
114722	69.5 to 72.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
114723	72.5 to 73.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
114724	77.6 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
114709	81.0 to 84.0 feet	Vertical Change	.35"	5 ft	15	REF		
114710	86.1 to 88.9 feet	Vertical Change	.39"	5 ft	14	LF	$75	**$1,050**
114733	86.1 to 87.1 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
114725	97.3 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
114712	97.5 to 103.2 feet	Vertical Change	-.26"	5 ft	29	REF		
114713	103.8 to 104.8 feet	Vertical Change	.36"	5 ft	5	REF		
114714	106.0 to 107.0 feet	Vertical Change	-.49"	5 ft	5	REF		
114715	108.2 to 109.2 feet	Vertical Change	.26"	5 ft	5	REF		
114716	111.3 to 114.6 feet	Vertical Change	.28"	5 ft	17	REF		
114726	113.1 to 118.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
114717	115.3 to 116.3 feet	Vertical Change	-.38"	5 ft	5	REF		
114727	121.3 to 122.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
114728	124.9 to 126.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
114729	126.0 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **JOSEPH LN** **$60,636.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311235	SONORA ST	LYNN WAY	ADELL ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115110	0.8 to 9.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,340**
115111	11.8 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
115112	13.8 to 34.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
115113	39.8 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
115114	49.6 to 60.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
115123	61.0 to 76.1 feet	Key Note Segment		5 ft	75			
115109	68.7 to 69.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
115115	79.4 to 87.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
115116	88.8 to 90.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
115117	107.6 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
115118	114.9 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
115119	119.6 to 123.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
115120	123.0 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
115121	135.3 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
115122	157.2 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: E *side of* **SONORA ST** *Starting at:* **LYNN WAY** **$53,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031130	SONORA ST	RUSH ST	924 SONORA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119732	7.1 to 8.1 feet	Vertical Change	-.4"	5 ft	5	LF	$75	**$375**
119735	7.4 to 21.3 feet	Key Note Segment		5 ft	70			
119733	14.2 to 15.2 feet	Vertical Change	.26"	5 ft	5	REF		
119734	25.1 to 26.1 feet	Vertical Change	.49"	5 ft	5	REF		
119736	37.9 to 38.9 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **RUSH ST** **$474.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311213	SONORA ST	SARAH ST	1336 SONORA ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114939	18.5 to 19.5 feet	**Vertical Change**	1.2"	5 ft	5	REF		
114942	19.3 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114943	23.8 to 25.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
114944	26.5 to 27.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
114950	28.2 to 48.2 feet	Key Note Segment		5 ft	100			
114945	52.6 to 54.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
114951	56.7 to 76.8 feet	Key Note Segment		5 ft	101			
114940	57.2 to 58.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
114946	78.5 to 81.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
114947	82.1 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
114941	86.7 to 87.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
114948	92.4 to 104.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
114949	106.8 to 108.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **SARAH ST** **$18,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311136	SONORA ST	SUSAN LN	JOSEPH LN	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114601	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
114602	5.3 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
114596	18.1 to 19.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
114603	18.4 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
114604	29.2 to 35.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
114605	36.8 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
114606	41.0 to 45.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
114597	44.0 to 45.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
114607	47.6 to 49.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
114608	52.2 to 117.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	326	SF	$120	**$39,120**
114598	75.5 to 76.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
114609	122.8 to 125.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
114610	125.1 to 126.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
114599	126.2 to 127.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
114611	139.2 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
114600	144.8 to 145.8 feet	**Vertical Change**	.94"	5 ft	5	REF		
114612	146.2 to 148.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **SUSAN LN** **$67,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311212	SONORA ST	W CLARK ST	SARAH ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114920	0.0 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
114921	5.8 to 7.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
114922	8.6 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
114934	16.5 to 36.8 feet	Key Note Segment		5 ft	101			
114923	39.3 to 41.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
114924	42.0 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
114913	42.5 to 43.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
114935	46.6 to 66.8 feet	Key Note Segment		5 ft	101			
114925	68.0 to 74.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
114926	74.9 to 81.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
114927	83.8 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
114936	88.3 to 109.8 feet	Key Note Segment		5 ft	108			
114914	109.6 to 110.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
114928	111.8 to 129.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
114915	118.7 to 119.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
114937	131.3 to 152.3 feet	Key Note Segment		5 ft	105			
114916	152.7 to 153.7 feet	**Vertical Change**	1.35"	5 ft	5	REF		
114929	153.3 to 159.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	**$3,780**
114930	160.8 to 169.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,340**
114917	163.9 to 164.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
114931	169.7 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
114938	174.3 to 196.2 feet	Key Note Segment		5 ft	110			
114918	175.2 to 176.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
114919	185.7 to 186.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
114932	196.6 to 197.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
114933	197.7 to 210.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **W CLARK ST** **$50,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311223	SONORA ST	W SHERWOOD WAY	ASHLAN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114969	0.0 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,064**
114970	4.5 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
114971	8.5 to 18.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	**$4,752**
114972	22.2 to 28.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
114973	28.4 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
115016	31.5 to 50.1 feet	Key Note Segment		4 ft	74			
114974	51.8 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
114975	52.8 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
114976	56.0 to 58.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$960**
114977	60.4 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	78	SF	$120	**$9,312**
114952	70.1 to 71.1 feet	**Vertical Change**	.67"	4 ft	4	REF		
114978	79.8 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
114953	83.2 to 84.2 feet	**Vertical Change**	.28"	4 ft	4	REF		
114954	84.9 to 85.9 feet	**Vertical Change**	.85"	4 ft	4	REF		
115017	85.8 to 102.2 feet	Key Note Segment		4 ft	66			
114979	103.0 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$672**
114980	105.0 to 109.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
115018	110.4 to 127.4 feet	Key Note Segment		4 ft	68			
114955	135.3 to 136.3 feet	**Vertical Change**	.35"	4 ft	4	LF	$75	**$300**
114981	136.5 to 137.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
114982	139.8 to 145.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	21	SF	$120	**$2,544**
114983	145.3 to 152.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	**$3,312**
114984	155.8 to 163.4 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	30	SF	$120	**$3,648**
114985	163.4 to 181.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	70	SF	$120	**$8,448**
114986	181.0 to 183.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**
114956	186.1 to 187.1 feet	**Vertical Change**	-.47"	4 ft	4	LF	$75	**$300**
115019	186.4 to 204.9 feet	Key Note Segment		4 ft	74			
114957	195.1 to 196.1 feet	**Vertical Change**	.41"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311223	SONORA ST	W SHERWOOD WAY	ASHLAN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114987	208.4 to 212.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	18	SF	$120	**$2,112**
115020	213.0 to 231.0 feet	Key Note Segment		4 ft	72			
114958	216.8 to 217.8 feet	**Vertical Change**	.46"	4 ft	4	REF		
114959	231.0 to 232.0 feet	**Vertical Change**	.35"	4 ft	4	REF		
114988	232.7 to 245.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	50	SF	$120	**$5,952**
114960	240.5 to 241.5 feet	**Vertical Change**	2.1"	4 ft	4	REF		
114989	245.1 to 246.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
114990	248.3 to 257.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,224**
114991	258.6 to 261.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
114961	258.8 to 259.8 feet	**Vertical Change**	.27"	4 ft	4	REF		
114992	263.8 to 273.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	40	SF	$120	**$4,800**
114993	274.3 to 275.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
114962	274.6 to 275.6 feet	**Vertical Change**	.33"	4 ft	4	REF		
114994	276.4 to 281.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
114995	281.2 to 289.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,032**
114963	290.2 to 291.2 feet	**Vertical Change**	-.35"	4 ft	4	LF	$75	**$300**
115021	290.2 to 308.8 feet	Key Note Segment		4 ft	74			
114964	308.7 to 309.7 feet	**Vertical Change**	.27"	4 ft	4	REF		
114996	312.1 to 315.8 feet	Cross Slope (PAR)	8.0-9.0%	4 ft	15	SF	$120	**$1,776**
114965	316.5 to 317.5 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
115022	316.5 to 334.1 feet	Key Note Segment		4 ft	70			
114997	336.0 to 388.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	211	SF	$120	**$25,344**
115023	393.4 to 412.3 feet	Key Note Segment		4 ft	76			
114966	394.1 to 395.1 feet	**Vertical Change**	-.4"	4 ft	4	REF		
114998	415.1 to 419.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,208**
114967	415.8 to 416.8 feet	**Vertical Change**	1.31"	4 ft	4	REF		
115024	419.7 to 437.9 feet	Key Note Segment		4 ft	73			
114999	439.8 to 446.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,072**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311223	SONORA ST	W SHERWOOD WAY	ASHLAN WAY	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115000	450.5 to 457.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,216**
115001	459.8 to 483.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	93	SF	$120	**$11,184**
114968	464.5 to 465.5 feet	**Vertical Change**	-.26"	4 ft	4	REF		
115002	486.3 to 495.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
115025	497.7 to 515.6 feet	Key Note Segment		4 ft	72			
115003	518.9 to 522.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
115026	523.5 to 541.0 feet	Key Note Segment		4 ft	70			
115004	544.8 to 554.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,752**
115005	556.9 to 558.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
115006	559.0 to 566.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
115007	568.5 to 570.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
115008	573.0 to 586.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	52	SF	$120	**$6,240**
115009	586.0 to 587.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
115010	587.0 to 597.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
115027	599.4 to 618.3 feet	Key Note Segment		4 ft	76			
115011	619.9 to 621.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
115012	622.0 to 625.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
115028	626.3 to 644.5 feet	Key Note Segment		4 ft	73			
115013	646.3 to 657.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	44	SF	$120	**$5,280**
115014	657.6 to 668.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
115015	672.8 to 677.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **SONORA ST** *Starting at:* **W SHERWOOD WAY** **$166,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091338	SONORA ST	W SHERWOOD WAY	E CLEVELAND AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54380	0.0 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
54381	5.6 to 25.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
54421	26.6 to 42.8 feet	Key Note Segment		5 ft	81			
54361	37.2 to 38.2 feet	**Vertical Change**	.79"	5 ft	5	REF		
54382	43.2 to 48.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$960**
54383	48.6 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
54384	53.4 to 62.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
54385	62.7 to 83.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,360**
54422	83.3 to 99.2 feet	Key Note Segment		5 ft	80			
54423	108.8 to 124.7 feet	Key Note Segment		5 ft	80			
54386	124.7 to 125.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$220**
54387	145.0 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
54388	152.5 to 176.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
54389	178.8 to 184.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
54424	184.2 to 200.4 feet	Key Note Segment		5 ft	81			
54362	199.5 to 200.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
54390	201.0 to 215.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
54425	215.9 to 231.3 feet	Key Note Segment		5 ft	77			
54391	231.4 to 238.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	33	SF	$40	**$1,320**
54392	240.5 to 255.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
54393	255.3 to 268.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
54363	261.3 to 262.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
54394	271.7 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
54426	292.8 to 307.6 feet	Key Note Segment		5 ft	74			
54364	301.4 to 302.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
54365	307.8 to 308.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
54395	307.9 to 319.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	60	SF	$40	**$2,400**
54396	319.9 to 321.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091338	SONORA ST	W SHERWOOD WAY	E CLEVELAND AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54427	325.3 to 342.3 feet	Key Note Segment		5 ft	85			
54366	340.6 to 341.6 feet	Vertical Change	.3"	5 ft	5	REF		
54397	342.3 to 353.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	58	SF	$40	$2,300
54398	357.2 to 365.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	$5,160
54399	367.0 to 376.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,580
54400	386.0 to 397.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020
54428	397.7 to 412.4 feet	Key Note Segment		5 ft	74			
54401	415.5 to 417.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
54402	417.9 to 422.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
54429	424.1 to 438.5 feet	Key Note Segment		5 ft	72			
54367	438.7 to 439.7 feet	Vertical Change	.29"	5 ft	5	LF	$75	$375
54403	441.8 to 451.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
54404	452.0 to 465.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	$7,860
54405	468.0 to 469.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
54406	473.3 to 480.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080
54407	481.3 to 499.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	$11,100
54368	492.9 to 493.9 feet	Vertical Change	.72"	5 ft	5	REF		
54430	500.2 to 514.5 feet	Key Note Segment		5 ft	72			
54369	500.6 to 501.6 feet	Vertical Change	.37"	5 ft	5	REF		
54370	514.6 to 515.6 feet	Vertical Change	.62"	5 ft	5	REF		
54408	515.0 to 518.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
54409	518.0 to 524.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
54431	528.1 to 544.3 feet	Key Note Segment		5 ft	81			
54371	542.9 to 543.9 feet	Vertical Change	.68"	5 ft	5	REF		
54372	560.3 to 561.3 feet	Vertical Change	-.56"	5 ft	5	SF	$75	$375
54373	576.6 to 577.6 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
54374	580.9 to 581.9 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
54410	600.8 to 606.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091338	SONORA ST	W SHERWOOD WAY	E CLEVELAND AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54432	606.1 to 620.4 feet	Key Note Segment		5 ft	72			
54375	606.5 to 607.5 feet	Vertical Change	.28"	5 ft	5	REF		
54411	624.2 to 632.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
54433	635.5 to 649.3 feet	Key Note Segment		5 ft	69			
54412	649.9 to 651.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
54413	654.5 to 658.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
54414	659.8 to 667.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
54376	679.6 to 680.6 feet	Vertical Change	1.37"	5 ft	5	SF	$75	**$375**
54415	683.1 to 686.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
54377	687.3 to 688.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**
54416	699.3 to 708.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
54434	708.8 to 728.3 feet	Key Note Segment		5 ft	98			
54417	728.3 to 734.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	32	SF	$40	**$1,260**
54435	735.2 to 753.9 feet	Key Note Segment		5 ft	94			
54418	753.9 to 756.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	12	SF	$40	**$480**
54419	756.3 to 775.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
54379	770.7 to 771.7 feet	Vertical Change	-.26"	5 ft	5	REF		
54420	775.9 to 779.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **W SHERWOOD WAY** **$197,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031225	SONORA ST	W SOUTH ST	724 SONORA ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120026	6.7 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**

TOTAL COST FOR: W *side of* **SONORA ST** *Starting at:* **W SOUTH ST** **$11,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101417	SOQUEL CT	SAWMILL ST	SAWMILL ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56726	1.1 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
56727	8.0 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
56747	18.2 to 39.3 feet	Key Note Segment		5 ft	105			
56728	40.0 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
56748	43.0 to 64.8 feet	Key Note Segment		5 ft	109			
56718	64.5 to 65.5 feet	**Vertical Change**	1.23"	5 ft	5	REF		
56729	66.1 to 81.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
56730	84.3 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
56749	92.2 to 114.0 feet	Key Note Segment		5 ft	109			
56731	114.2 to 120.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	33	SF	$40	**$1,320**
56732	120.8 to 125.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
56733	128.0 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
56734	135.4 to 148.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
56750	148.3 to 171.6 feet	Key Note Segment		5 ft	116			
56719	149.6 to 150.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
56720	170.2 to 171.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
56735	172.3 to 173.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
56736	173.5 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
56737	180.8 to 184.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56721	205.1 to 206.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
56751	216.3 to 239.2 feet	Key Note Segment		5 ft	115			
56722	237.5 to 238.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
56738	240.8 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
56739	249.2 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56740	259.1 to 265.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
56741	268.7 to 273.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
56752	273.2 to 295.2 feet	Key Note Segment		5 ft	110			
56723	293.7 to 294.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108101417	SOQUEL CT	SAWMILL ST	SAWMILL ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56742	295.3 to 320.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	126	SF	$40	$5,040
56724	306.7 to 307.7 feet	Vertical Change	-.3"	5 ft	5	REF		
56753	320.5 to 342.8 feet	Key Note Segment		5 ft	112			
56743	343.0 to 344.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$280
56744	344.4 to 345.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
56754	346.0 to 368.3 feet	Key Note Segment		5 ft	112			
56745	368.4 to 377.3 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	45	SF	$40	$1,780
56746	379.8 to 387.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	$4,380
56725	387.2 to 388.2 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375

TOTAL COST FOR: SE *side of* **SOQUEL CT** *Starting at:* **SAWMILL ST** **$67,310.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201528	ST JULIEN DR	671 ST JULIEN DR	COSENTINO DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77362	0.8 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
77363	12.0 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
77369	28.6 to 47.0 feet	Key Note Segment		5 ft	92			
77357	49.2 to 50.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
77370	51.1 to 70.3 feet	Key Note Segment		5 ft	96			
77358	60.4 to 61.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
77364	71.1 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
77365	76.9 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**
77359	89.5 to 90.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
77366	105.2 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
77371	116.3 to 142.9 feet	Key Note Segment		5 ft	133			
77367	144.3 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
77360	145.8 to 146.8 feet	**Vertical Change**	-.66"	5 ft	5	REF		
77372	147.3 to 166.1 feet	Key Note Segment		5 ft	94			
77361	156.6 to 157.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77368	171.9 to 187.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**

TOTAL COST FOR: N *side of* **ST JULIEN DR** *Starting at:* **671 ST JULIEN DR** **$48,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201522	ST JULIEN DR	COSENTINO DR	GOOSECROSS DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77273	1.1 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,500**
77261	3.0 to 4.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
77274	11.3 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
77302	20.0 to 47.2 feet	Key Note Segment		5 ft	136			
77275	49.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
77303	51.3 to 71.7 feet	Key Note Segment		5 ft	102			
77276	73.8 to 75.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
77277	78.1 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
77278	102.3 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
77262	107.8 to 108.8 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
77279	110.5 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
77304	116.1 to 143.7 feet	Key Note Segment		5 ft	138			
77263	144.0 to 145.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
77264	147.6 to 148.6 feet	**Vertical Change**	-1.18"	5 ft	5	SF	$75	**$375**
77305	148.6 to 176.8 feet	Key Note Segment		5 ft	141			
77280	180.5 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
77281	192.5 to 206.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
77282	212.8 to 214.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
77283	216.9 to 217.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
77306	219.8 to 239.2 feet	Key Note Segment		5 ft	97			
77284	239.2 to 243.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
77307	244.9 to 270.3 feet	Key Note Segment		5 ft	127			
77285	270.3 to 275.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	25	SF	$40	**$980**
77286	278.1 to 280.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
77287	285.3 to 287.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
77265	286.0 to 287.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77288	296.6 to 315.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
77308	317.8 to 345.9 feet	Key Note Segment		5 ft	141			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201522	ST JULIEN DR	COSENTINO DR	GOOSECROSS DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77289	350.4 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
77309	352.8 to 382.9 feet	Key Note Segment		5 ft	151			
77290	383.6 to 418.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
77266	391.4 to 392.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
77267	409.2 to 410.2 feet	**Vertical Change**	-.4"	5 ft	5	REF		
77291	420.3 to 423.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
77292	423.0 to 425.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
77310	425.5 to 445.9 feet	Key Note Segment		5 ft	102			
77293	445.9 to 447.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
77311	449.2 to 470.7 feet	Key Note Segment		5 ft	108			
77294	471.8 to 492.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
77268	472.6 to 473.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
77312	492.1 to 513.4 feet	Key Note Segment		5 ft	107			
77295	522.2 to 554.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,140**
77269	534.6 to 535.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
77296	554.6 to 576.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,140**
77313	576.5 to 597.8 feet	Key Note Segment		5 ft	106			
77270	590.4 to 591.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
77297	602.2 to 625.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
77298	627.3 to 636.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
77314	636.1 to 657.8 feet	Key Note Segment		5 ft	109			
77299	659.2 to 660.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77315	662.1 to 684.2 feet	Key Note Segment		5 ft	111			
77271	676.4 to 677.4 feet	**Vertical Change**	-.35"	5 ft	5	REF		
77300	684.7 to 685.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
77272	685.0 to 686.0 feet	**Vertical Change**	.49"	5 ft	5	REF		
77301	685.8 to 708.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**

TOTAL COST FOR: S *side of* **ST JULIEN DR** *Starting at:* **COSENTINO DR** **$162,230.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201526	ST JULIEN DR	GOOSECROSS DR	653 ST JULIEN DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77328	12.5 to 26.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
77346	26.4 to 48.0 feet	Key Note Segment		5 ft	108			
77329	48.0 to 52.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	20	SF	$40	**$800**
77347	52.0 to 74.6 feet	Key Note Segment		5 ft	113			
77330	75.9 to 93.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,740**
77331	94.9 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
77332	108.3 to 112.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
77348	112.4 to 133.3 feet	Key Note Segment		5 ft	105			
77316	119.9 to 120.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
77317	126.8 to 127.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
77333	134.1 to 173.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	195	SF	$120	**$23,400**
77318	141.8 to 142.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
77319	172.1 to 173.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
77334	173.6 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
77335	182.2 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
77336	188.6 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
77349	193.8 to 222.5 feet	Key Note Segment		5 ft	144			
77350	226.5 to 245.3 feet	Key Note Segment		5 ft	94			
77337	250.1 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	226	SF	$120	**$27,120**
77320	261.9 to 262.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
77321	269.9 to 270.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
77351	295.3 to 314.0 feet	Key Note Segment		5 ft	94			
77338	315.8 to 317.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
77352	318.0 to 336.3 feet	Key Note Segment		5 ft	92			
77322	327.3 to 328.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
77339	337.3 to 362.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
77340	365.7 to 374.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
77341	376.6 to 379.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201526	ST JULIEN DR	GOOSECROSS DR	653 ST JULIEN DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77323	380.9 to 381.9 feet	Vertical Change	-.38"	5 ft	5	LF	$75	$375
77353	382.3 to 400.8 feet	Key Note Segment		5 ft	93			
77324	392.2 to 393.2 feet	Vertical Change	-.32"	5 ft	5	REF		
77342	401.7 to 405.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
77354	405.3 to 424.2 feet	Key Note Segment		5 ft	95			
77325	414.7 to 415.7 feet	Vertical Change	-.26"	5 ft	5	REF		
77343	430.5 to 442.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,140
77326	453.5 to 454.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
77344	461.7 to 463.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
77345	464.1 to 468.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
77355	468.6 to 486.9 feet	Key Note Segment		5 ft	92			
77327	478.6 to 479.6 feet	Vertical Change	.46"	5 ft	5	REF		
77356	492.0 to 508.6 feet	Key Note Segment		5 ft	83			

TOTAL COST FOR: N *side of* **ST JULIEN DR** *Starting at:* **GOOSECROSS DR** **$126,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201622	ST MONTELENA CT	MONTEREY DR	MONTEREY DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77902	0.5 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
77903	8.3 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
77904	45.0 to 48.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
77905	51.1 to 99.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	243	SF	$120	**$29,160**
77906	100.8 to 113.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
77886	112.8 to 113.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
77950	113.9 to 136.1 feet	Key Note Segment		5 ft	111			
77907	137.1 to 139.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
77951	140.6 to 161.6 feet	Key Note Segment		5 ft	105			
77908	162.8 to 172.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
77909	172.0 to 180.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
77910	180.5 to 181.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77911	186.8 to 194.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
77912	194.4 to 203.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
77887	197.5 to 198.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
77952	203.5 to 225.4 feet	Key Note Segment		5 ft	110			
77913	228.5 to 231.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
77953	231.3 to 252.6 feet	Key Note Segment		5 ft	107			
77888	241.1 to 242.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
77914	252.8 to 258.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	29	SF	$40	**$1,140**
77915	260.6 to 262.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
77916	266.6 to 272.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
77889	270.1 to 271.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
77917	272.5 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
77918	276.0 to 285.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
77890	276.8 to 277.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
77919	288.6 to 292.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,460**
77954	293.0 to 314.4 feet	Key Note Segment		5 ft	107			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201622	ST MONTELENA CT	MONTEREY DR	MONTEREY DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77920	316.3 to 322.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
77955	323.0 to 345.3 feet	Key Note Segment		5 ft	112			
77891	344.3 to 345.3 feet	**Vertical Change**	1.48"	5 ft	5	REF		
77921	346.5 to 353.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
77922	356.3 to 357.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77892	359.2 to 360.2 feet	**Vertical Change**	-.79"	5 ft	5	SF	$75	**$375**
77956	360.3 to 381.8 feet	Key Note Segment		5 ft	108			
77893	367.3 to 368.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
77894	374.6 to 375.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
77895	382.7 to 383.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
77923	382.7 to 388.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
77896	388.4 to 389.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
77957	388.7 to 411.3 feet	Key Note Segment		5 ft	113			
77897	396.9 to 397.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
77924	412.6 to 417.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
77958	418.5 to 440.6 feet	Key Note Segment		5 ft	111			
77925	445.6 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
77959	452.8 to 473.2 feet	Key Note Segment		5 ft	102			
77926	478.4 to 480.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
77960	482.3 to 503.7 feet	Key Note Segment		5 ft	107			
77898	503.9 to 504.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
77927	504.7 to 506.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
77928	508.8 to 513.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,700**
77929	514.1 to 515.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
77930	519.1 to 542.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
77931	543.0 to 544.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
77961	544.7 to 566.0 feet	Key Note Segment		5 ft	106			
77932	567.1 to 569.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201622	ST MONTELENA CT	MONTEREY DR	MONTEREY DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77899	570.3 to 571.3 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
77962	571.3 to 592.8 feet	Key Note Segment		5 ft	108			
77933	593.9 to 604.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	$6,240
77934	604.3 to 608.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,580
77935	609.5 to 614.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
77936	617.0 to 619.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
77937	619.8 to 625.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
77938	628.8 to 632.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
77939	634.5 to 638.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
77963	638.0 to 658.8 feet	Key Note Segment		5 ft	104			
77900	658.9 to 659.9 feet	Vertical Change	.26"	5 ft	5	REF		
77940	660.9 to 666.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	$3,540
77964	666.8 to 687.4 feet	Key Note Segment		5 ft	103			
77901	666.9 to 667.9 feet	Vertical Change	-.27"	5 ft	5	REF		
77941	688.8 to 689.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
77942	690.3 to 693.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
77943	696.1 to 700.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,820
77944	702.9 to 728.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	$15,240
77945	733.5 to 746.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
77946	746.7 to 757.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	$6,240
77947	759.3 to 777.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$11,040
77948	781.2 to 789.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,680
77949	792.1 to 809.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,500

TOTAL COST FOR: S/E/N *side of* **ST MONTELENA CT** *Starting at:* **MONTEREY DR** **$232,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201120915	ST TROPEZ DR	HOWARD RD	EAGLE WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93686	0.0 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93687	6.5 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
93688	9.7 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
93680	19.8 to 20.8 feet	**Vertical Change**	-1.11"	5 ft	5	REF		
93693	21.7 to 25.3 feet		6.0-7.0%	5 ft	18			
93694	26.3 to 28.0 feet		5.0-6.0%	5 ft	9			
93689	28.7 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93690	38.3 to 45.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
93681	40.3 to 41.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
93682	45.9 to 46.9 feet	**Vertical Change**	-.51"	5 ft	5	SF	$75	**$375**
93683	58.9 to 59.9 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
93684	64.4 to 65.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
93691	67.6 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
93692	74.7 to 84.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
93695	79.2 to 82.1 feet		6.0-7.0%	5 ft	15			
93685	84.5 to 85.5 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ST TROPEZ DR** *Starting at:* **HOWARD RD** **$22,245.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121034	ST TROPEZ DR	MAPLE ST	PLUMAS STREET	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94516	5.9 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
94530	11.4 to 37.4 feet	Key Note Segment		5 ft	130			
94517	39.8 to 40.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
94518	40.9 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
94519	46.0 to 82.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	184	SF	$120	**$22,080**
94512	73.1 to 74.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
94531	83.7 to 109.6 feet	Key Note Segment		5 ft	130			
94513	109.1 to 110.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94520	110.3 to 111.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
94521	115.5 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
94522	118.5 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
94514	121.0 to 122.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
94523	125.4 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
94524	131.8 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
94525	136.1 to 142.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
94532	145.1 to 166.4 feet	Key Note Segment		5 ft	107			
94515	155.7 to 156.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
94526	166.4 to 174.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	38	SF	$40	**$1,520**
94533	176.7 to 197.3 feet	Key Note Segment		5 ft	103			
94527	199.9 to 205.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
94528	206.2 to 218.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
94529	219.1 to 220.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **ST TROPEZ DR** *Starting at:* **MAPLE ST** **$54,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121102	ST TROPEZ DR	OAK ST	PLUMAS STREET	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94815	0.1 to 18.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
94816	19.8 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
94817	39.4 to 79.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	200	SF	$120	**$23,940**
94818	81.6 to 93.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
94819	96.5 to 104.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
94820	106.1 to 118.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
94821	122.2 to 145.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
94814	145.5 to 146.5 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ST TROPEZ DR** *Starting at:* **OAK ST** **$78,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201120858	ST TROPEZ DR	PLUMAS ST	OAK ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93537	0.8 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
93538	7.3 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
93552	21.3 to 43.2 feet	Key Note Segment		5 ft	110			
93527	42.0 to 43.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
93539	43.6 to 53.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,120**
93528	48.4 to 49.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
93553	53.8 to 76.8 feet	Key Note Segment		5 ft	115			
93529	55.0 to 56.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
93530	65.0 to 66.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
93540	76.8 to 86.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	48	SF	$40	**$1,920**
93541	86.7 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93542	91.9 to 97.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
93543	102.8 to 110.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
93554	110.9 to 137.9 feet	Key Note Segment		5 ft	135			
93544	138.3 to 147.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	45	SF	$40	**$1,800**
93531	144.7 to 145.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
93545	147.7 to 150.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
93546	150.0 to 162.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
93547	165.3 to 170.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
93555	170.0 to 197.3 feet	Key Note Segment		5 ft	137			
93532	183.6 to 184.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
93533	196.0 to 197.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
93548	197.3 to 234.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	187	SF	$40	**$7,480**
93556	234.8 to 256.8 feet	Key Note Segment		5 ft	110			
93534	245.4 to 246.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
93549	257.7 to 260.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
93550	260.1 to 264.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
93551	266.9 to 273.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201120858	ST TROPEZ DR	PLUMAS ST	OAK ST	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93536	269.9 to 270.9 feet	Vertical Change	-.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **ST TROPEZ DR** *Starting at:* **PLUMAS ST** **$59,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121036	ST TROPEZ DR	PLUMAS STREET	MAPLE ST	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94539	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
94540	6.4 to 8.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
94541	9.1 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
94542	17.7 to 21.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
94543	24.2 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
94544	43.0 to 46.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
94534	45.8 to 46.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
94545	48.8 to 64.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
94535	58.7 to 59.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
94546	66.8 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
94547	82.4 to 84.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
94536	82.8 to 83.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
94548	84.2 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94549	88.4 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
94550	91.2 to 107.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
94537	106.8 to 107.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
94551	109.0 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
94538	119.8 to 120.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
94552	137.0 to 139.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
94553	142.5 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: W *side of* **ST TROPEZ DR** *Starting at:* **PLUMAS STREET** **$69,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201442	ST. MICHELLE DR	COSENTINO DR	STADIUM RD	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76940	4.3 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	300	SF	$120	**$36,000**

TOTAL COST FOR: N *side of* **ST. MICHELLE DR** *Starting at:* **COSENTINO DR** **$36,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201534	ST. MICHELLE DR	COSENTINO DR	GOOSECROSS DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77388	0.0 to 27.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,560**
77419	28.0 to 48.8 feet	Key Note Segment		5 ft	104			
77389	50.4 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
77420	52.7 to 73.7 feet	Key Note Segment		5 ft	105			
77384	66.2 to 67.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
77390	75.0 to 76.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77391	76.3 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77392	83.3 to 105.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
77393	105.1 to 133.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,740**
77385	131.3 to 132.3 feet	**Vertical Change**	.64"	5 ft	5	REF		
77421	133.0 to 154.1 feet	Key Note Segment		5 ft	106			
77394	154.7 to 159.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
77386	158.1 to 159.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
77422	159.5 to 180.9 feet	Key Note Segment		5 ft	107			
77395	183.0 to 202.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
77396	203.1 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,020**
77397	240.4 to 246.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
77423	247.3 to 268.5 feet	Key Note Segment		5 ft	106			
77398	270.7 to 273.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
77424	273.0 to 295.3 feet	Key Note Segment		5 ft	112			
77399	302.9 to 304.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77400	311.9 to 319.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
77401	324.7 to 338.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
77402	338.3 to 351.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
77425	353.1 to 373.9 feet	Key Note Segment		5 ft	104			
77403	374.8 to 376.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
77404	377.8 to 379.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
77426	380.4 to 400.8 feet	Key Note Segment		5 ft	102			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201534	ST. MICHELLE DR	COSENTINO DR	GOOSECROSS DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77387	393.1 to 394.1 feet	Vertical Change	-.3"	5 ft	5	REF		
77405	401.2 to 402.2 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	5	SF	$40	**$200**
77406	404.6 to 406.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
77407	407.8 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
77408	425.5 to 468.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	216	SF	$120	**$25,860**
77427	468.6 to 489.5 feet	Key Note Segment		5 ft	105			
77409	490.9 to 493.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
77428	494.3 to 515.7 feet	Key Note Segment		5 ft	107			
77410	516.5 to 533.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	86	SF	$40	**$3,460**
77411	534.9 to 550.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,120**
77412	552.7 to 559.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
77413	559.2 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
77414	573.3 to 574.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
77429	574.4 to 596.3 feet	Key Note Segment		5 ft	109			
77415	597.0 to 600.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
77430	600.8 to 622.8 feet	Key Note Segment		5 ft	110			
77416	626.8 to 647.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
77417	648.7 to 650.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
77431	652.9 to 673.9 feet	Key Note Segment		5 ft	105			
77418	676.8 to 704.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,380**

TOTAL COST FOR: S *side of* **ST. MICHELLE DR** *Starting at:* **COSENTINO DR** **$209,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201540	ST. MICHELLE DR	GOOSECROSS DR	COSENTINO DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77443	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
77444	1.3 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
77445	23.9 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
77483	29.3 to 50.5 feet	Key Note Segment		5 ft	106			
77446	51.3 to 65.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
77432	64.4 to 65.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
77447	68.3 to 82.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
77484	82.0 to 102.5 feet	Key Note Segment		5 ft	103			
77448	103.9 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
77485	106.2 to 128.3 feet	Key Note Segment		5 ft	111			
77449	129.7 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77450	133.0 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
77451	156.3 to 177.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
77452	177.8 to 188.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
77486	188.5 to 208.8 feet	Key Note Segment		5 ft	102			
77453	211.5 to 212.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77487	213.9 to 235.4 feet	Key Note Segment		5 ft	108			
77433	233.3 to 234.3 feet	**Vertical Change**	-.37"	5 ft	5	REF		
77454	237.4 to 242.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
77455	246.5 to 258.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
77456	260.1 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,360**
77488	301.2 to 322.8 feet	Key Note Segment		5 ft	108			
77457	324.0 to 325.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
77434	324.7 to 325.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
77458	325.9 to 327.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
77489	328.0 to 348.7 feet	Key Note Segment		5 ft	104			
77435	341.7 to 342.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
77459	350.1 to 359.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201540	ST. MICHELLE DR	GOOSECROSS DR	COSENTINO DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77460	362.1 to 363.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
77461	363.1 to 374.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
77462	380.0 to 385.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
77436	388.2 to 389.2 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
77463	389.8 to 392.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
77464	395.3 to 401.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
77465	401.5 to 408.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
77496	405.5 to 406.5 feet		5.0-6.0%	5 ft	5			
77437	407.2 to 408.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
77490	408.4 to 429.9 feet	Key Note Segment		5 ft	108			
77466	430.4 to 433.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	17	SF	$40	**$680**
77491	433.8 to 455.4 feet	Key Note Segment		5 ft	108			
77467	457.5 to 470.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
77438	462.9 to 463.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
77468	472.8 to 476.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
77469	477.0 to 478.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
77470	481.2 to 501.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
77439	496.1 to 497.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
77471	505.8 to 512.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
77472	521.6 to 522.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77492	522.8 to 543.0 feet	Key Note Segment		5 ft	101			
77473	543.3 to 544.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$260**
77440	544.5 to 545.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		
77493	547.8 to 569.4 feet	Key Note Segment		5 ft	108			
77474	570.6 to 572.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
77475	575.4 to 580.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
77441	578.0 to 579.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77476	582.5 to 598.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201540	ST. MICHELLE DR	GOOSECROSS DR	COSENTINO DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77477	599.9 to 603.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
77478	603.9 to 629.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	126	SF	$120	**$15,060**
77494	629.3 to 650.7 feet	Key Note Segment		5 ft	107			
77479	652.3 to 653.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
77495	654.3 to 676.1 feet	Key Note Segment		5 ft	109			
77480	678.2 to 681.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
77481	682.8 to 696.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
77482	696.9 to 704.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**

TOTAL COST FOR: N *side of* **ST. MICHELLE DR** *Starting at:* **GOOSECROSS DR** **$204,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201443	ST. MICHELLE DR	STADIUM RD	COSENTINO DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76941	19.3 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
76942	41.3 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
76943	46.0 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
76944	57.8 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**

TOTAL COST FOR: S *side of* **ST. MICHELLE DR** *Starting at:* **STADIUM RD** **$16,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201547	ST. MONTELENA DR	COSENTINO DR	GOOSECROSS DR	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77525	1.8 to 5.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
77526	8.9 to 25.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
77504	11.5 to 12.5 feet	**Vertical Change**	.6"	5 ft	5	REF		
77505	21.5 to 22.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
77560	27.2 to 49.4 feet	Key Note Segment		5 ft	111			
77527	50.4 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
77561	53.8 to 74.4 feet	Key Note Segment		5 ft	103			
77506	55.9 to 56.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
77507	67.9 to 68.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
77528	75.8 to 102.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,960**
77529	109.3 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
77530	129.0 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
77562	133.3 to 155.0 feet	Key Note Segment		5 ft	108			
77531	157.7 to 159.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
77563	159.9 to 181.1 feet	Key Note Segment		5 ft	106			
77532	182.0 to 229.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	239	SF	$120	**$28,680**
77533	232.5 to 241.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
77534	242.7 to 243.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
77535	243.8 to 246.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
77564	248.3 to 269.8 feet	Key Note Segment		5 ft	108			
77536	271.8 to 272.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
77509	273.4 to 274.4 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
77565	274.8 to 296.1 feet	Key Note Segment		5 ft	107			
77537	296.5 to 297.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
77538	297.7 to 305.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
77510	302.5 to 303.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
77539	311.6 to 321.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
77540	325.5 to 326.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201547	ST. MONTELENA DR	COSENTINO DR	GOOSECROSS DR	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77541	326.7 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
77511	327.3 to 328.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
77566	354.0 to 376.1 feet	Key Note Segment		5 ft	111			
77542	376.1 to 377.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$280**
77567	380.8 to 401.9 feet	Key Note Segment		5 ft	106			
77512	392.1 to 393.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
77513	399.0 to 400.0 feet	**Vertical Change**	3.39"	5 ft	5	REF		
77543	402.4 to 426.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	120	SF	$40	**$4,780**
77514	402.7 to 403.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
77544	429.7 to 430.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
77545	435.5 to 438.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
77546	441.0 to 446.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
77547	446.6 to 467.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
77568	468.8 to 490.4 feet	Key Note Segment		5 ft	108			
77548	491.5 to 494.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
77569	494.4 to 516.7 feet	Key Note Segment		5 ft	112			
77515	497.5 to 498.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
77517	516.7 to 517.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
77549	517.3 to 528.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	55	SF	$40	**$2,180**
77518	524.9 to 525.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
77550	530.4 to 540.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
77551	541.0 to 555.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
77552	555.0 to 563.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
77553	563.8 to 574.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
77554	574.7 to 576.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,260**
77520	575.4 to 576.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
77570	576.8 to 598.1 feet	Key Note Segment		5 ft	107			
77555	598.7 to 600.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201547	ST. MONTELENA DR	COSENTINO DR	GOOSECROSS DR	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77571	601.5 to 623.6 feet	Key Note Segment		5 ft	111			
77521	621.9 to 622.9 feet	Vertical Change	.27"	5 ft	5	REF		
77556	624.0 to 635.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	58	SF	$40	**$2,320**
77557	635.6 to 641.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
77558	643.2 to 654.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
77523	654.6 to 655.6 feet	Vertical Change	-.49"	5 ft	5	LF	$75	**$375**
77572	655.0 to 676.4 feet	Key Note Segment		5 ft	107			
77559	680.6 to 705.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
77524	705.9 to 706.9 feet	Vertical Change	.52"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **ST. MONTELENA DR** *Starting at:* **COSENTINO DR** **$191,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201553	ST. MONTELENA DR	GOOSECROSS DR	COSENTINO DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77587	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
77588	2.5 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
77589	16.8 to 24.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
77625	25.9 to 48.3 feet	Key Note Segment		5 ft	112			
77590	49.7 to 51.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
77591	51.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
77592	62.3 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
77593	71.5 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
77594	76.7 to 78.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
77626	79.6 to 101.2 feet	Key Note Segment		5 ft	108			
77595	102.5 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77627	106.9 to 127.7 feet	Key Note Segment		5 ft	104			
77596	128.5 to 130.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$460**
77573	128.8 to 129.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77597	130.8 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	235	SF	$120	**$28,200**
77598	181.0 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
77574	185.9 to 186.9 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
77628	186.3 to 208.3 feet	Key Note Segment		5 ft	110			
77599	209.1 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
77629	213.8 to 234.3 feet	Key Note Segment		5 ft	103			
77600	235.0 to 248.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
77601	249.7 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
77602	262.5 to 264.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
77603	269.8 to 274.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
77575	276.3 to 277.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
77604	277.4 to 295.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$11,040**
77605	297.5 to 300.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
77630	300.7 to 322.8 feet	Key Note Segment		5 ft	111			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201553	ST. MONTELENA DR	GOOSECROSS DR	COSENTINO DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77606	323.5 to 324.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77631	328.1 to 349.4 feet	Key Note Segment		5 ft	107			
77607	352.6 to 376.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
77608	376.5 to 377.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
77576	376.8 to 377.8 feet	**Vertical Change**	.58"	5 ft	5	REF		
77609	383.8 to 403.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
77610	404.1 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
77632	407.8 to 428.2 feet	Key Note Segment		5 ft	102			
77577	414.8 to 415.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
77611	429.9 to 431.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
77633	434.7 to 455.8 feet	Key Note Segment		5 ft	106			
77612	456.3 to 500.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	223	SF	$40	**$8,900**
77613	501.1 to 506.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
77614	510.9 to 521.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
77578	522.1 to 523.1 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
77634	522.2 to 544.3 feet	Key Note Segment		5 ft	110			
77579	524.9 to 525.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
77580	534.4 to 535.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
77581	536.4 to 537.4 feet	**Vertical Change**	.62"	5 ft	5	REF		
77582	538.9 to 539.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
77615	544.7 to 548.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
77635	548.0 to 569.2 feet	Key Note Segment		5 ft	106			
77616	569.2 to 579.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	49	SF	$40	**$1,960**
77583	570.3 to 571.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
77617	579.7 to 611.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
77618	612.4 to 619.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
77584	620.2 to 621.2 feet	**Vertical Change**	-.42"	5 ft	5	REF		
77619	621.2 to 626.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	27	SF	$120	**$3,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201553	ST. MONTELENA DR	GOOSECROSS DR	COSENTINO DR	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77620	627.0 to 628.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
77636	628.8 to 649.3 feet	Key Note Segment		5 ft	103			
77637	654.4 to 675.6 feet	Key Note Segment		5 ft	106			
77621	676.1 to 690.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	73	SF	$40	**$2,920**
77585	676.5 to 677.5 feet	**Vertical Change**	-.43"	5 ft	5	REF		
77622	691.4 to 692.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
77623	695.3 to 700.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
77624	700.0 to 705.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
77586	705.5 to 706.5 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **ST. MONTELENA DR** *Starting at:* **GOOSECROSS DR** **$182,705.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201606	ST. MONTELENA DR	GOOSECROSS DR	MONTEREY DR	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
77745	0.8 to 35.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	174	SF	$120	**$20,820**
77746	39.4 to 79.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	203	SF	$120	**$24,300**
77747	79.9 to 84.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,700**
77748	84.4 to 94.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
77749	94.6 to 100.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
77750	100.8 to 122.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	107	SF	$120	**$12,780**
77751	124.8 to 146.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,260**

TOTAL COST FOR: S *side of* **ST. MONTELENA DR** *Starting at:* **GOOSECROSS DR** **$83,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201707	ST. MONTELENA DR	MONTEREY ST	GOOSECROSS DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78209	0.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
78210	15.2 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	**$20,700**
78211	52.0 to 60.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
78212	60.7 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
78213	85.3 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
78214	96.0 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	220	SF	$120	**$26,400**
78215	147.5 to 148.5 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **ST. MONTELENA DR** *Starting at:* **MONTEREY ST** **$74,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191031	STADIUM RD	109 STADIUM RD	109 STADIUM RD	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102810	5.4 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
102805	14.5 to 15.5 feet	**Vertical Change**	2.94"	5 ft	5	REF		
102811	15.3 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
102806	39.2 to 40.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
102807	50.2 to 51.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
102812	91.2 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
102808	102.1 to 103.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
102809	104.0 to 105.0 feet	**Vertical Change**	2.34"	5 ft	5	SF	$75	**$375**
102813	109.6 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102814	131.2 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **109 STADIUM RD** **$17,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191035	STADIUM RD	109 STADIUM RD	OLIVE AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102816	4.9 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	55	SF	$120	**$6,624**
102817	51.8 to 68.0 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	194	SF	$120	**$23,328**
102818	70.4 to 81.9 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	138	SF	$120	**$16,560**
102824	81.9 to 99.6 feet	Key Note Segment		12 ft	212			
102819	99.6 to 111.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	12 ft	144	SF	$40	**$5,760**
102820	111.6 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	84	SF	$120	**$10,080**
102821	118.8 to 122.1 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	40	SF	$120	**$4,752**
102822	122.1 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	56	SF	$120	**$6,768**
102815	125.6 to 126.6 feet	**Vertical Change**	-.26"	12 ft	12	REF		
102823	126.8 to 127.8 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **109 STADIUM RD** **$75,312.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211405	STADIUM RD	705 PECAN AVE	705 PECAN AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79789	1.0 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **705 PECAN AVE** **$11,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211408	STADIUM RD	705 PECAN AVE	705 PECAN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79794	0.6 to 21.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
79795	21.8 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79796	26.2 to 30.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
79797	30.6 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79798	36.1 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
79799	39.7 to 51.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,840**
79800	51.1 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
79801	63.3 to 71.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
79802	71.1 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
79803	104.7 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79804	123.8 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
79805	131.9 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,580**
79790	152.1 to 153.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
79806	153.2 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$16,980**
79791	173.1 to 174.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
79807	188.3 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79808	191.7 to 193.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
79809	194.7 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
79810	198.9 to 201.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
79811	202.4 to 207.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
79812	208.5 to 225.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	84	SF	$120	**$10,020**
79813	225.2 to 248.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
79814	248.8 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
79815	253.1 to 259.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
79816	262.0 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
79792	265.4 to 266.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
79817	271.0 to 281.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
79818	281.1 to 282.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211408	STADIUM RD	705 PECAN AVE	705 PECAN AVE	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79819	283.1 to 291.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,980**
79820	291.7 to 296.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
79821	296.2 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	218	SF	$120	**$26,160**
79822	340.2 to 355.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
79823	355.8 to 369.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
79824	369.4 to 372.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
79825	376.3 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
79793	379.0 to 380.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **705 PECAN AVE** **$199,155.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211410	STADIUM RD	705 PECAN AVE	705 PECAN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79827	0.0 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,940**
79826	0.3 to 1.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
79828	24.6 to 36.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
79829	39.3 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
79830	50.8 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
79831	59.3 to 63.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
79832	64.4 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
79833	77.0 to 82.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
79834	82.3 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **705 PECAN AVE** **$44,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211411	STADIUM RD	705 PECAN AVE	PECAN AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79838	0.3 to 15.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
79839	16.7 to 27.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
79840	30.0 to 53.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
79841	54.9 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
79835	55.1 to 56.1 feet	**Vertical Change**	-.54"	5 ft	5	REF		
79842	58.6 to 86.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,620**
79843	89.3 to 94.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
79844	95.5 to 98.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
79836	96.5 to 97.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
79845	99.8 to 101.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
79846	102.0 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
79847	114.7 to 119.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
79837	119.5 to 120.5 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
79848	121.1 to 122.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
79849	123.2 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,300**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **705 PECAN AVE** **$74,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211319	STADIUM RD	775 MILANO LANE	MILANO LANE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79493	0.0 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	278	SF	$120	**$33,312**
79492	30.9 to 31.9 feet	**Vertical Change**	-.27"	8 ft	8	REF		
79494	34.7 to 42.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	65	SF	$120	**$7,776**
79495	42.8 to 68.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	207	SF	$120	**$24,864**
79496	73.5 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	167	SF	$120	**$20,064**
79497	96.5 to 97.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$960**
79498	104.9 to 118.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	105	SF	$120	**$12,576**
79499	122.1 to 133.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	88	SF	$120	**$10,560**
79500	136.0 to 142.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,432**
79501	145.8 to 153.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	58	SF	$120	**$6,912**
79502	153.0 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	83	SF	$120	**$9,984**
79503	165.9 to 173.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	63	SF	$120	**$7,584**
79504	173.8 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	226	SF	$120	**$27,072**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **775 MILANO LANE** **$168,096.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201190954	STADIUM RD	ALMOND AVE	DEERWOOD DR	111

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102628	0.3 to 14.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	146	SF	$120	**$17,520**
102629	16.1 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	107	SF	$120	**$12,840**
102610	27.1 to 28.1 feet	**Vertical Change**	.3"	10 ft	10	REF		
102630	27.6 to 28.6 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	10	SF	$120	**$1,200**
102631	30.2 to 33.6 feet	Cross Slope (PAR)	9.0-10.0%	10 ft	34	SF	$120	**$4,080**
102611	31.1 to 32.1 feet	**Vertical Change**	-.54"	10 ft	10	REF		
102612	33.8 to 34.8 feet	**Vertical Change**	.35"	10 ft	10	LF	$75	**$750**
102632	36.8 to 41.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	44	SF	$120	**$5,280**
102633	41.8 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	30	SF	$120	**$3,600**
102634	47.8 to 51.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	40	SF	$120	**$4,800**
102635	53.3 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	138	SF	$120	**$16,560**
102636	67.1 to 69.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	25	SF	$120	**$3,000**
102637	71.8 to 75.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	36	SF	$120	**$4,320**
102638	75.6 to 76.9 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	13	SF	$120	**$1,560**
102659	75.8 to 76.8 feet	**Protruding Object**	60"	10 ft	10	JOB	$99	**$99**
102639	78.1 to 83.9 feet	Cross Slope (PAR)	6.0-7.0%	10 ft	58	SF	$120	**$6,960**
102613	80.9 to 81.9 feet	**Vertical Change**	-.27"	10 ft	10	REF		
102614	83.4 to 86.9 feet	**Vertical Change**	.3"	10 ft	35	REF		
102662	84.7 to 85.8 feet		5.0-6.0%	10 ft	11			
102640	85.8 to 86.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	10	SF	$120	**$1,200**
102641	87.7 to 118.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	308	SF	$120	**$36,960**
102660	89.4 to 90.4 feet	**Protruding Object**	72"	10 ft	10	JOB	$99	**$99**
102615	96.2 to 97.2 feet	**Vertical Change**	.27"	10 ft	10	REF		
102616	116.6 to 117.6 feet	**Vertical Change**	.33"	10 ft	10	REF		
102642	118.5 to 134.7 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	162	SF	$120	**$19,440**
102618	130.7 to 131.7 feet	**Vertical Change**	.34"	10 ft	10	REF		
102619	132.4 to 133.4 feet	**Vertical Change**	-.29"	10 ft	10	REF		
102643	134.7 to 137.3 feet	Cross Slope (PAR)	6.0-7.0%	10 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201190954	STADIUM RD	ALMOND AVE	DEERWOOD DR	111

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102663	135.3 to 136.8 feet		6.0-7.0%	10 ft	15			
102664	136.8 to 138.1 feet		5.0-6.0%	10 ft	13			
102644	137.3 to 140.0 feet	Cross Slope (PAR)	5.0-6.0%	10 ft	27	SF	$120	**$3,240**
102620	137.8 to 138.8 feet	**Vertical Change**	-.32"	10 ft	10	REF		
102645	141.3 to 164.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	234	SF	$120	**$28,080**
102621	145.3 to 148.3 feet	**Vertical Change**	-.26"	10 ft	30	REF		
102661	145.6 to 146.6 feet	**Protruding Object**	60"	10 ft	10	JOB	$99	**$99**
102646	165.7 to 170.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	49	SF	$120	**$5,880**
102622	166.5 to 167.5 feet	**Vertical Change**	.32"	10 ft	10	REF		
102647	171.3 to 175.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	44	SF	$120	**$5,280**
102648	177.8 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	20	SF	$120	**$2,400**
102623	180.3 to 181.3 feet	**Vertical Change**	.37"	10 ft	10	LF	$75	**$750**
102649	184.3 to 186.0 feet	Cross Slope (PAR)	10.0-11.0%	10 ft	17	SF	$120	**$2,040**
102624	186.6 to 187.6 feet	**Vertical Change**	-.32"	10 ft	10	LF	$75	**$750**
102650	190.8 to 195.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	51	SF	$120	**$6,120**
102651	196.8 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	34	SF	$120	**$4,080**
102652	200.8 to 211.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	110	SF	$120	**$13,200**
102653	214.3 to 218.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	45	SF	$120	**$5,400**
102654	219.4 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	43	SF	$120	**$5,160**
102655	227.2 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	36	SF	$120	**$4,320**
102656	230.8 to 246.0 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	152	SF	$120	**$18,240**
102626	239.2 to 240.2 feet	**Vertical Change**	-.33"	10 ft	10	REF		
102657	246.3 to 287.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	408	SF	$120	**$48,960**
102627	289.1 to 290.1 feet	**Vertical Change**	.75"	10 ft	10	REF		
102658	289.2 to 296.9 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	77	SF	$120	**$9,240**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **ALMOND AVE** **$306,627.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211357	STADIUM RD	ALMOND AVE	CROWN TERRACE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79710	0.4 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
79702	4.7 to 5.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
79703	12.2 to 13.2 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
79711	15.3 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
79712	24.5 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
79713	33.4 to 37.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79704	38.5 to 39.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
79714	40.5 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
79715	74.8 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
79706	82.4 to 83.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
79716	94.7 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
79707	99.6 to 100.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
79708	108.6 to 109.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
79717	120.3 to 130.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
79709	126.5 to 127.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
79718	133.8 to 134.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
79719	140.8 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79720	147.3 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **ALMOND AVE** **$44,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211257	STADIUM RD	BERNARDI AVE	SAN ANGELO AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79361	3.8 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
79362	8.6 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
79363	12.8 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79364	18.4 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
79365	28.3 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
79366	35.0 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
79367	40.8 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
79368	62.4 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
79369	69.6 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79370	73.8 to 79.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
79371	79.4 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
79372	96.3 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
79360	96.9 to 97.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
79373	117.3 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,780**
79374	147.8 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
79375	161.7 to 164.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
79376	165.0 to 170.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **BERNARDI AVE** **$63,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211403	STADIUM RD	CROWN TERRACE	PARKING LOT ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79721	13.8 to 14.8 feet	Vertical Change	.27"	5 ft	5	REF		
79726	14.5 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
79722	32.8 to 33.8 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
79727	45.2 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
79728	75.5 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79729	83.9 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
79730	96.3 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
79731	125.0 to 129.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
79732	133.1 to 140.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
79733	144.4 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
79734	162.1 to 186.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
79735	191.5 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
79736	214.5 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
79737	229.3 to 235.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
79738	285.7 to 289.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79739	289.1 to 292.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,860**
79740	292.7 to 294.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
79785	294.9 to 331.3 feet	Key Note Segment		5 ft	182			
79741	331.9 to 335.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
79742	340.9 to 342.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
79743	354.6 to 357.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
79744	371.8 to 380.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
79745	406.0 to 409.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79746	414.0 to 434.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
79747	438.9 to 481.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	215	SF	$120	**$25,740**
79723	444.5 to 445.5 feet	Vertical Change	.27"	5 ft	5	REF		
79748	488.3 to 497.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
79749	510.9 to 514.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211403	STADIUM RD	CROWN TERRACE	PARKING LOT ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79750	519.8 to 528.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
79751	536.4 to 546.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
79752	550.0 to 556.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
79753	556.7 to 569.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,860**
79754	569.8 to 585.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
79755	587.3 to 597.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
79756	597.5 to 598.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
79757	601.6 to 616.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,820**
79758	618.8 to 620.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
79759	623.3 to 644.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
79786	645.7 to 682.8 feet	Key Note Segment		5 ft	185			
79760	682.8 to 687.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,000**
79761	690.2 to 700.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
79762	701.1 to 717.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
79763	723.2 to 739.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
79764	739.4 to 748.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
79787	748.8 to 786.4 feet	Key Note Segment		5 ft	188			
79765	786.8 to 787.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
79766	788.7 to 807.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
79767	818.8 to 839.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
79768	863.3 to 870.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
79769	874.8 to 883.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
79724	880.1 to 881.1 feet	**Vertical Change**	3.65"	5 ft	5	REF		
79770	885.3 to 886.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
79771	888.8 to 890.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
79772	890.9 to 892.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79773	900.8 to 903.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
79774	909.2 to 917.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110211403	STADIUM RD	CROWN TERRACE	PARKING LOT ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79775	929.3 to 945.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
79776	945.9 to 954.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
79777	957.1 to 958.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
79778	959.3 to 972.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
79779	977.7 to 980.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
79780	980.5 to 983.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
79781	983.5 to 986.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
79782	988.5 to 1004.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
79725	1000.9 to 1001.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
79788	1005.3 to 1039.4 feet	Key Note Segment		5 ft	171			
79783	1043.0 to 1050.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
79784	1050.2 to 1052.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **CROWN TERRACE** **$295,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191001	STADIUM RD	DEERWOOD DR	GAMAY ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102682	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
102714	0.9 to 1.9 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**
102683	1.8 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
102665	16.3 to 17.3 feet	Vertical Change	-.41"	5 ft	5	REF		
102684	16.5 to 22.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
102666	20.3 to 21.3 feet	Vertical Change	-.49"	5 ft	5	REF		
102667	25.2 to 28.7 feet	Vertical Change	-.36"	5 ft	18	REF		
102685	25.3 to 29.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
102686	29.7 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
102668	31.8 to 32.8 feet	Vertical Change	1.86"	5 ft	5	SF	$75	**$375**
102687	46.1 to 53.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
102669	48.4 to 49.4 feet	Vertical Change	-.49"	5 ft	5	REF		
102670	51.4 to 52.4 feet	Vertical Change	.36"	5 ft	5	REF		
102688	54.6 to 64.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
102671	54.8 to 55.8 feet	Vertical Change	-.59"	5 ft	5	REF		
102689	64.3 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
102672	74.9 to 75.9 feet	Vertical Change	3.24"	5 ft	5	REF		
102690	81.1 to 123.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	213	SF	$120	**$25,500**
102673	107.2 to 108.2 feet	Vertical Change	.27"	5 ft	5	REF		
102715	115.5 to 117.5 feet		7.0-8.0%	5 ft	10			
102691	123.6 to 128.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
102692	129.7 to 133.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
102693	133.8 to 137.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
102694	137.3 to 151.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,760**
102695	151.9 to 176.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
102696	176.5 to 199.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
102697	202.6 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102698	208.5 to 218.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191001	STADIUM RD	DEERWOOD DR	GAMAY ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102699	218.8 to 223.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
102700	223.6 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
102701	231.3 to 244.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,100**
102702	244.8 to 252.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
102703	252.9 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
102674	253.5 to 254.5 feet	**Vertical Change**	2.72"	5 ft	5	REF		
102704	261.6 to 269.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,620**
102705	269.7 to 271.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
102706	273.3 to 279.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
102675	278.9 to 279.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
102707	282.0 to 289.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
102676	291.6 to 292.6 feet	**Vertical Change**	3.39"	5 ft	5	SF	$75	**$375**
102708	296.2 to 301.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
102677	297.6 to 298.6 feet	**Vertical Change**	-1.41"	5 ft	5	REF		
102716	298.3 to 300.2 feet		5.0-6.0%	5 ft	10			
102709	301.2 to 305.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
102678	305.5 to 306.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
102710	306.0 to 329.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
102711	333.6 to 342.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
102679	334.6 to 335.6 feet	**Vertical Change**	.49"	5 ft	5	REF		
102680	339.1 to 340.1 feet	**Vertical Change**	1.45"	5 ft	5	REF		
102712	345.3 to 348.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
102681	345.7 to 346.7 feet	**Vertical Change**	2.13"	5 ft	5	REF		
102713	348.9 to 352.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **DEERWOOD DR** **$181,689.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211016	STADIUM RD	DEERWOOD DR	DEERWOOD CT	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
78747	0.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
78759	8.9 to 10.6 feet		6.0-7.0%	5 ft	9			
78756	16.3 to 34.3 feet	Key Note Segment		5 ft	90			
78748	36.0 to 38.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
78749	41.3 to 53.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
78757	55.3 to 88.7 feet	Key Note Segment		5 ft	167			
78750	88.8 to 104.7 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	80	SF	$40	**$3,180**
78746	93.8 to 94.8 feet	Vertical Change	-.32"	5 ft	5	REF		
78751	104.7 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
78752	114.3 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
78753	117.2 to 121.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
78758	123.1 to 140.5 feet	Key Note Segment		5 ft	87			
78754	142.0 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
78755	158.8 to 218.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	297	SF	$120	**$35,700**

TOTAL COST FOR: S *side of* **STADIUM RD** *Starting at:* **DEERWOOD DR** **$75,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191115	STADIUM RD	EL MONTE AVE	GAMAY AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103101	0.1 to 19.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
103087	19.9 to 20.9 feet	**Vertical Change**	.36"	5 ft	5	REF		
103114	19.9 to 39.7 feet	Key Note Segment		5 ft	99			
103088	30.7 to 31.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
103089	38.0 to 39.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
103102	42.5 to 58.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
103090	55.7 to 56.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
103103	59.0 to 62.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
103115	64.5 to 92.4 feet	Key Note Segment		5 ft	140			
103091	67.2 to 68.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
103092	82.2 to 83.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
103104	93.7 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
103105	102.3 to 108.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
103106	108.1 to 126.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
103116	126.7 to 146.5 feet	Key Note Segment		5 ft	99			
103094	146.8 to 147.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
103107	148.3 to 170.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
103117	170.1 to 197.7 feet	Key Note Segment		5 ft	138			
103095	197.0 to 198.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
103108	198.8 to 200.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
103109	200.0 to 207.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
103118	207.7 to 226.4 feet	Key Note Segment		5 ft	94			
103096	208.8 to 209.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103097	210.4 to 211.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
103098	217.8 to 218.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
103099	225.0 to 226.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
103110	228.1 to 237.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
103111	238.6 to 243.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191115	STADIUM RD	EL MONTE AVE	GAMAY AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103112	243.0 to 247.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
103113	248.4 to 249.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
103100	250.5 to 251.5 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **EL MONTE AVE** **$73,770.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191120	STADIUM RD	EL MONTE AVE	GAMAY AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103129	7.1 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	294	SF	$120	**$35,220**
103119	29.6 to 30.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
103120	42.9 to 43.9 feet	**Vertical Change**	.69"	5 ft	5	REF		
103121	64.1 to 65.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
103130	68.1 to 72.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
103131	74.3 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
103122	85.2 to 86.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
103132	88.3 to 118.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	149	SF	$120	**$17,880**
103133	120.3 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
103125	132.9 to 133.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
103134	143.0 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
103135	161.6 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
103136	178.8 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
103137	194.3 to 233.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	194	SF	$120	**$23,220**
103127	228.4 to 229.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
103138	236.2 to 238.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
103139	238.2 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
103128	249.3 to 250.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **EL MONTE AVE** **$125,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191123	STADIUM RD	GAMAY AVE	804 STADIUM RD	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103142	6.4 to 19.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,100**
103140	11.5 to 12.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
103143	22.3 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
103144	35.3 to 37.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
103145	42.0 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103146	48.3 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
103147	53.6 to 61.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
103148	62.1 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
103149	66.3 to 85.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
103141	85.5 to 86.5 feet	**Vertical Change**	.56"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **GAMAY AVE** **$38,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191007	STADIUM RD	GAMAY ST	404 STADIUM RD	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102725	0.0 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
102726	9.9 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
102717	11.5 to 12.5 feet	**Vertical Change**	.54"	5 ft	5	REF		
102727	13.8 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
102728	17.3 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
102744	32.7 to 35.3 feet		6.0-7.0%	5 ft	13			
102729	44.1 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
102730	57.4 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
102731	61.3 to 100.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	198	SF	$120	**$23,760**
102719	89.6 to 90.6 feet	**Vertical Change**	.91"	5 ft	5	REF		
102732	100.9 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,440**
102733	123.3 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
102720	124.1 to 125.1 feet	**Vertical Change**	.52"	5 ft	5	REF		
102721	127.2 to 128.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
102722	135.0 to 136.0 feet	**Vertical Change**	.79"	5 ft	5	REF		
102734	154.6 to 161.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
102735	161.8 to 163.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,140**
102736	164.1 to 175.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	56	SF	$120	**$6,720**
102737	175.3 to 182.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
102738	182.3 to 191.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
102739	200.8 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
102740	205.9 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
102741	213.0 to 233.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
102742	236.5 to 287.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	256	SF	$120	**$30,660**
102723	286.8 to 287.8 feet	**Vertical Change**	2.92"	5 ft	5	REF		
102743	288.3 to 291.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
102724	291.4 to 292.4 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **GAMAY ST** **$146,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211343	STADIUM RD	GARY LN	ST. MICHELLE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79639	0.9 to 2.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79640	6.7 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
79641	25.2 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
79642	31.3 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
79643	39.8 to 41.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
79644	48.9 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
79645	55.8 to 60.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
79646	63.8 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
79647	83.0 to 101.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
79648	130.0 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
79649	145.8 to 150.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
79650	153.3 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
79651	167.2 to 227.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	300	SF	$120	**$36,000**
79638	184.7 to 185.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
79652	233.2 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
79653	266.8 to 278.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
79654	279.2 to 288.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
79655	293.8 to 298.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
79656	300.2 to 316.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
79657	318.7 to 328.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
79658	332.4 to 357.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,060**
79659	357.5 to 359.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79660	362.1 to 364.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
79661	367.0 to 370.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
79662	377.2 to 378.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
79663	381.1 to 382.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
79664	399.5 to 408.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
79665	420.8 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211343	STADIUM RD	GARY LN	ST. MICHELLE DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79666	460.4 to 463.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79667	498.6 to 502.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
79668	505.4 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **GARY LN** **$173,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191028	STADIUM RD	MAPLE ST	109 STADIUM RD	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102786	0.3 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
102787	2.0 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
102777	2.5 to 3.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
102788	14.3 to 25.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
102778	16.5 to 17.5 feet	**Vertical Change**	1.85"	5 ft	5	REF		
102801	25.3 to 42.9 feet	Key Note Segment		5 ft	88			
102789	42.9 to 49.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	32	SF	$40	**$1,280**
102802	49.3 to 73.2 feet	Key Note Segment		5 ft	120			
102790	74.8 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
102779	82.1 to 83.1 feet	**Vertical Change**	2.01"	5 ft	5	REF		
102791	105.5 to 121.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
102792	124.3 to 129.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
102793	131.9 to 133.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
102794	136.3 to 142.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,540**
102803	142.2 to 158.4 feet	Key Note Segment		5 ft	81			
102780	143.2 to 144.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
102781	145.6 to 146.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
102782	149.8 to 150.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
102795	160.6 to 174.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
102796	180.0 to 187.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
102797	189.2 to 217.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
102783	197.7 to 198.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
102798	220.9 to 233.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
102804	234.2 to 252.4 feet	Key Note Segment		5 ft	91			
102799	258.3 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
102800	338.9 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
102785	349.6 to 350.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **MAPLE ST** **$97,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191048	STADIUM RD	MAPLE ST	EL MONTE AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102900	0.0 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
102901	8.9 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
102884	24.0 to 25.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
102902	32.0 to 40.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
102924	40.1 to 54.8 feet	Key Note Segment		5 ft	74			
102885	56.6 to 57.6 feet	**Vertical Change**	1.97"	5 ft	5	REF		
102903	56.7 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
102925	65.7 to 86.3 feet	Key Note Segment		5 ft	103			
102886	67.7 to 68.7 feet	**Vertical Change**	1.94"	5 ft	5	REF		
102904	87.1 to 88.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
102905	92.5 to 93.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
102906	98.2 to 104.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
102907	108.2 to 118.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
102908	118.3 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
102909	126.8 to 128.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
102887	127.6 to 128.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
102910	128.5 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
102911	131.5 to 133.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$1,020**
102926	134.3 to 155.2 feet	Key Note Segment		5 ft	104			
102888	134.6 to 135.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
102889	147.0 to 148.0 feet	**Vertical Change**	.65"	5 ft	5	REF		
102890	152.3 to 153.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
102912	156.5 to 161.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,820**
102927	162.6 to 182.6 feet	Key Note Segment		5 ft	100			
102913	184.1 to 185.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
102914	185.2 to 186.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
102915	191.2 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
102891	192.8 to 193.8 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191048	STADIUM RD	MAPLE ST	EL MONTE AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102916	203.9 to 210.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
102892	209.5 to 210.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
102917	213.5 to 221.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
102893	218.3 to 219.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
102928	223.4 to 245.5 feet	Key Note Segment		5 ft	111			
102894	224.8 to 225.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
102918	245.5 to 256.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	53	SF	$40	**$2,100**
102895	254.8 to 255.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
102919	256.5 to 259.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
102920	260.6 to 261.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
102921	261.7 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
102929	280.3 to 292.8 feet	Key Note Segment		5 ft	63			
102896	298.9 to 299.9 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
102922	302.2 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
102897	302.6 to 303.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
102898	332.6 to 333.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
102923	334.7 to 353.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
102899	357.9 to 358.9 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **MAPLE ST** **$105,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211323	STADIUM RD	MILANO LANE	GARY LN	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79510	0.0 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
79511	9.6 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
79505	10.7 to 11.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
79512	20.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
79513	26.7 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
79514	35.6 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
79515	41.1 to 56.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
79516	59.1 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
79506	64.7 to 65.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
79517	73.3 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
79518	94.4 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
79519	104.0 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
79507	109.2 to 110.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
79520	131.4 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
79508	143.6 to 144.6 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
79521	146.8 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
79522	161.3 to 165.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
79523	174.0 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
79524	185.8 to 188.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
79525	215.1 to 224.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
79526	237.7 to 278.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	**$24,540**
79527	284.3 to 296.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
79528	303.2 to 304.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
79529	308.3 to 315.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
79530	321.4 to 332.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
79531	338.5 to 359.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
79532	370.8 to 382.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
79509	384.7 to 385.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211323	STADIUM RD	MILANO LANE	GARY LN	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79533	396.7 to 414.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
79534	419.1 to 431.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **MILANO LANE** **$151,245.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191043	STADIUM RD	OLIVE AVE	MAPLE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102852	0.0 to 38.1 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	457	SF	$120	**$54,864**
102853	38.3 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	318	SF	$120	**$38,160**
102825	41.4 to 42.4 feet	**Vertical Change**	.26"	12 ft	12	REF		
102854	75.0 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	106	SF	$120	**$12,672**
102826	75.9 to 76.9 feet	**Vertical Change**	.47"	12 ft	12	REF		
102855	86.2 to 98.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	145	SF	$120	**$17,424**
102827	93.5 to 94.5 feet	**Vertical Change**	.26"	12 ft	12	REF		
102856	102.4 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	37	SF	$120	**$4,464**
102857	111.5 to 123.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	140	SF	$120	**$16,848**
102858	123.8 to 135.3 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	138	SF	$120	**$16,560**
102828	128.1 to 129.1 feet	**Vertical Change**	.27"	12 ft	12	REF		
102859	135.3 to 144.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	108	SF	$120	**$12,960**
102829	135.9 to 136.9 feet	**Vertical Change**	.31"	12 ft	12	REF		
102860	146.7 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	127	SF	$120	**$15,264**
102830	153.2 to 154.2 feet	**Vertical Change**	-.5"	12 ft	12	REF		
102861	161.2 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	150	SF	$120	**$18,000**
102831	163.3 to 164.3 feet	**Vertical Change**	-.37"	12 ft	12	REF		
102862	176.6 to 214.4 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	454	SF	$120	**$54,432**
102832	180.5 to 181.5 feet	**Vertical Change**	-.5"	12 ft	12	REF		
102833	198.0 to 199.0 feet	**Vertical Change**	.4"	12 ft	12	REF		
102834	215.3 to 216.3 feet	**Vertical Change**	.4"	12 ft	12	LF	$75	**$900**
102863	218.8 to 370.5 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	1820	SF	$120	**$218,448**
102835	250.1 to 251.1 feet	**Vertical Change**	.27"	12 ft	12	REF		
102836	263.9 to 264.9 feet	**Vertical Change**	-.37"	12 ft	12	REF		
102837	270.8 to 271.8 feet	**Vertical Change**	.28"	12 ft	12	REF		
102838	282.5 to 283.5 feet	**Vertical Change**	-.78"	12 ft	12	REF		
102839	302.0 to 303.0 feet	**Vertical Change**	-.28"	12 ft	12	REF		
102840	319.2 to 320.2 feet	**Vertical Change**	.27"	12 ft	12	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191043	STADIUM RD	OLIVE AVE	MAPLE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102841	370.7 to 371.7 feet	Vertical Change	.27"	12 ft	12	LF	$75	$900
102864	374.3 to 377.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	36	SF	$120	$4,320
102865	379.4 to 390.6 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	134	SF	$120	$16,128
102842	386.9 to 387.9 feet	Vertical Change	-.27"	12 ft	12	REF		
102866	408.8 to 417.2 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	101	SF	$120	$12,096
102867	418.1 to 421.8 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	44	SF	$120	$5,328
102868	421.8 to 423.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	24	SF	$120	$2,880
102843	422.7 to 423.7 feet	Vertical Change	.34"	12 ft	12	REF		
102869	426.1 to 427.4 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	16	SF	$120	$1,872
102870	427.9 to 455.1 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	326	SF	$120	$39,168
102844	436.1 to 437.1 feet	Vertical Change	3.1"	12 ft	12	REF		
102845	451.7 to 452.7 feet	Vertical Change	2.24"	12 ft	12	REF		
102880	456.2 to 491.7 feet	Key Note Segment		12 ft	426			
102846	484.6 to 485.6 feet	Vertical Change	.35"	12 ft	12	REF		
102871	492.8 to 502.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	120	SF	$120	$14,400
102872	503.8 to 518.3 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	174	SF	$120	$20,880
102847	515.2 to 516.2 feet	Vertical Change	.37"	12 ft	12	REF		
102881	530.7 to 561.4 feet	Key Note Segment		12 ft	368			
102848	557.0 to 558.0 feet	Vertical Change	2.2"	12 ft	12	REF		
102873	568.8 to 587.8 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	228	SF	$120	$27,360
102849	580.0 to 581.0 feet	Vertical Change	1.34"	12 ft	12	REF		
102850	593.0 to 594.0 feet	Vertical Change	.26"	12 ft	12	LF	$75	$900
102874	616.7 to 625.7 feet	Cross Slope (PAR)	2.0-3.0%	12 ft	108	SF	$120	$12,960
102882	626.7 to 658.1 feet	Key Note Segment		12 ft	377			
102851	635.4 to 636.4 feet	Vertical Change	.26"	12 ft	12	REF		
102875	661.7 to 673.5 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	142	SF	$120	$16,992
102876	675.8 to 736.8 feet	Cross Slope (PAR)	4.0-5.0%	12 ft	732	SF	$120	$87,840
102883	736.8 to 760.5 feet	Key Note Segment		12 ft	284			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191043	STADIUM RD	OLIVE AVE	MAPLE ST	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
102877	760.5 to 764.1 feet	Cross Slope (Driveway)	3.0-4.0%	12 ft	43	SF	$40	**$1,728**
102878	764.8 to 770.4 feet	Cross Slope (PAR)	5.0-6.0%	12 ft	67	SF	$120	**$8,064**
102879	770.4 to 771.8 feet	Cross Slope (PAR)	3.0-4.0%	12 ft	17	SF	$120	**$2,016**

TOTAL COST FOR: W *side of* **STADIUM RD** *Starting at:* **OLIVE AVE** **$756,828.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211501	STADIUM RD	SAINT MARY AVE	SAN MARCO AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80140	0.0 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
80137	4.4 to 5.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
80141	7.4 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
80142	24.7 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
80143	32.0 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	337	SF	$120	**$40,440**
80138	44.5 to 45.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
80144	106.7 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
80145	114.5 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
80146	126.8 to 133.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
80139	132.4 to 133.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
80147	135.3 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	**$20,400**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **SAINT MARY AVE** **$83,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211506	STADIUM RD	SAN ANDREA AVE	BERNARDI AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80162	0.0 to 16.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	81	SF	$120	**$9,660**
80163	16.3 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
80164	32.5 to 35.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
80165	35.8 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
80166	43.0 to 53.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
80167	56.3 to 57.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
80160	56.9 to 57.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
80168	60.8 to 64.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
80169	66.6 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
80170	80.9 to 81.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80161	84.0 to 85.0 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
80171	85.1 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
80172	87.3 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
80173	91.0 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
80174	121.3 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
80175	148.2 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **SAN ANDREA AVE** **$83,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211305	STADIUM RD	SAN ANGELO AVE	PECAN AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79445	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
79446	1.9 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	247	SF	$120	**$29,580**
79444	38.8 to 39.8 feet	**Vertical Change**	-.34"	5 ft	5	REF		
79447	72.5 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
79448	81.3 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **SAN ANGELO AVE** **$32,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211503	STADIUM RD	SAN MARCO AVE	SAN ANDREA AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80150	0.0 to 15.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
80151	15.0 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
80152	24.5 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
80153	30.7 to 35.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
80154	35.7 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
80155	39.9 to 79.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	197	SF	$120	**$23,640**
80148	41.6 to 42.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
80156	79.9 to 95.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
80157	102.8 to 106.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
80158	113.8 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,460**
80159	146.9 to 169.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
80149	154.2 to 155.2 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **SAN MARCO AVE** **$88,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211348	STADIUM RD	ST. MICHELLE DR	ALMOND AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79669	6.3 to 7.3 feet	Vertical Change	-.41"	5 ft	5	LF	$75	$375
79675	22.3 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
79676	28.0 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
79677	35.2 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,340
79678	44.0 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,640
79679	64.7 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
79680	74.9 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
79681	146.3 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,420
79682	164.3 to 166.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
79683	171.9 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
79670	175.9 to 176.9 feet	Vertical Change	-.33"	5 ft	5	REF		
79684	176.8 to 183.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
79685	196.4 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
79686	221.9 to 226.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
79687	228.8 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
79688	241.1 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
79689	250.8 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
79690	265.8 to 269.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
79671	268.1 to 269.1 feet	Vertical Change	.37"	5 ft	5	REF		
79691	272.8 to 276.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
79672	293.6 to 294.6 feet	Vertical Change	.68"	5 ft	5	SF	$75	$375
79692	300.1 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
79673	300.6 to 301.6 feet	Vertical Change	.31"	5 ft	5	REF		
79693	311.9 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
79694	348.4 to 350.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
79695	379.9 to 381.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
79696	388.3 to 392.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
79697	404.8 to 407.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110211348	STADIUM RD	ST. MICHELLE DR	ALMOND AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79698	420.7 to 433.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
79699	436.8 to 438.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
79700	441.9 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
79701	445.8 to 478.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,380**
79674	446.4 to 447.4 feet	**Vertical Change**	.89"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **STADIUM RD** *Starting at:* **ST. MICHELLE DR** **$90,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201021	STANFORD AVE	1073 STANFORD AVE	VALENCIA AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104449	0.5 to 22.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,260**
104450	24.5 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
104451	33.4 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
104458	46.6 to 65.8 feet	Key Note Segment		5 ft	96			
104443	47.2 to 48.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
104452	67.8 to 74.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
104459	74.5 to 93.8 feet	Key Note Segment		5 ft	97			
104445	75.0 to 76.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
104446	84.2 to 85.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104453	97.3 to 115.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
104448	109.4 to 110.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
104454	119.2 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
104460	141.5 to 160.5 feet	Key Note Segment		5 ft	95			
104455	162.8 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
104461	169.6 to 188.3 feet	Key Note Segment		5 ft	94			
104456	191.0 to 204.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
104457	207.8 to 220.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**

TOTAL COST FOR: N *side of* **STANFORD AVE** *Starting at:* **1073 STANFORD AVE** **$73,140.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201201018	STANFORD AVE	LEMON AVE	1073 STANFORD AVE	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104436	0.0 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
104437	7.8 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
104441	11.3 to 33.3 feet	Key Note Segment		5 ft	110			
104438	33.9 to 34.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104435	34.0 to 35.0 feet	**Vertical Change**	.81"	5 ft	5	REF		
104439	34.9 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
104440	39.4 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: N *side of* **STANFORD AVE** *Starting at:* **LEMON AVE** **$5,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191336	STANFORD AVE	TANGERINE AVE	VALENCIA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103417	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
103418	2.4 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
103400	4.2 to 5.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
103419	9.9 to 27.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
103401	10.3 to 11.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
103402	15.5 to 16.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103431	28.1 to 49.5 feet	Key Note Segment		5 ft	107			
103403	29.1 to 30.1 feet	**Vertical Change**	.69"	5 ft	5	REF		
103420	49.8 to 50.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$200**
103421	56.5 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
103432	61.8 to 81.0 feet	Key Note Segment		5 ft	96			
103422	83.7 to 85.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
103423	85.7 to 92.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
103424	99.2 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
103433	109.5 to 128.8 feet	Key Note Segment		5 ft	97			
103404	119.8 to 120.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		
103425	130.9 to 160.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	147	SF	$120	**$17,640**
103434	161.8 to 180.6 feet	Key Note Segment		5 ft	94			
103405	176.9 to 177.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
103426	184.7 to 236.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	260	SF	$120	**$31,200**
103406	189.0 to 190.0 feet	**Vertical Change**	1.51"	5 ft	5	REF		
103408	201.6 to 202.6 feet	**Vertical Change**	1.46"	5 ft	5	REF		
103409	204.9 to 205.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
103410	215.7 to 216.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
103435	237.6 to 256.4 feet	Key Note Segment		5 ft	94			
103411	238.3 to 239.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
103412	248.0 to 249.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
103436	262.8 to 283.1 feet	Key Note Segment		5 ft	102			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201191336	STANFORD AVE	TANGERINE AVE	VALENCIA AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103413	264.1 to 265.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
103427	286.7 to 312.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
103428	314.5 to 316.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
103437	317.2 to 335.9 feet	Key Note Segment		5 ft	94			
103414	317.4 to 318.4 feet	**Vertical Change**	.46"	5 ft	5	REF		
103415	326.9 to 327.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
103416	336.6 to 337.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
103429	337.3 to 338.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
103430	343.8 to 361.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**

TOTAL COST FOR: S *side of* **STANFORD AVE** *Starting at:* **TANGERINE AVE** **$103,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191340	STANFORD AVE	VALENCIA AVE	TANGERINE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103458	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
103459	4.8 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
103438	10.9 to 11.9 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
103460	14.1 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
103461	18.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103439	18.9 to 19.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103462	22.3 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
103463	28.2 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
103440	39.9 to 40.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
103477	56.6 to 75.3 feet	Key Note Segment		5 ft	94			
103441	67.0 to 68.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
103442	68.9 to 72.2 feet	**Vertical Change**	.26"	5 ft	16	REF		
103443	73.4 to 74.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
103444	75.9 to 76.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
103464	79.2 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
103445	81.4 to 82.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
103465	85.3 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
103446	96.9 to 97.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
103447	100.1 to 101.1 feet	**Vertical Change**	3.16"	5 ft	5	REF		
103478	107.9 to 126.9 feet	Key Note Segment		5 ft	95			
103466	128.6 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103467	130.6 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
103479	135.9 to 154.6 feet	Key Note Segment		5 ft	94			
103448	136.5 to 137.5 feet	**Vertical Change**	.52"	5 ft	5	REF		
103449	145.9 to 146.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
103468	156.6 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
103450	162.9 to 163.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
103469	166.2 to 191.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201191340	STANFORD AVE	VALENCIA AVE	TANGERINE AVE	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103451	179.1 to 180.1 feet	Vertical Change	.43"	5 ft	5	REF		
103470	191.6 to 195.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
103471	195.3 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
103452	203.9 to 204.9 feet	Vertical Change	.56"	5 ft	5	REF		
103480	211.5 to 229.6 feet	Key Note Segment		5 ft	91			
103453	232.1 to 233.1 feet	Vertical Change	.87"	5 ft	5	REF		
103472	232.2 to 234.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
103473	235.2 to 239.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
103481	239.0 to 259.0 feet	Key Note Segment		5 ft	100			
103454	239.6 to 240.6 feet	Vertical Change	-.27"	5 ft	5	REF		
103455	259.8 to 260.8 feet	Vertical Change	-.42"	5 ft	5	LF	$75	**$375**
103456	262.2 to 263.2 feet	Vertical Change	.48"	5 ft	5	LF	$75	**$375**
103474	264.6 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
103475	267.8 to 270.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
103476	270.9 to 278.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
103457	278.5 to 279.5 feet	Vertical Change	.29"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **STANFORD AVE** *Starting at:* **VALENCIA AVE** **$85,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201201024	STANFORD AVE	VALENCIA AVE	LEMON AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104469	0.0 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
104470	1.8 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
104471	19.5 to 34.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,180**
104462	19.7 to 20.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
104472	37.3 to 52.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
104483	52.2 to 71.9 feet	Key Note Segment		5 ft	99			
104473	73.8 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
104484	80.4 to 99.2 feet	Key Note Segment		5 ft	94			
104463	90.1 to 91.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
104474	100.3 to 102.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
104475	103.8 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
104476	107.8 to 110.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
104464	108.8 to 109.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
104477	111.4 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,980**
104478	132.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
104479	146.3 to 155.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
104485	155.4 to 175.1 feet	Key Note Segment		5 ft	99			
104465	166.1 to 167.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
104480	178.7 to 180.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
104466	182.5 to 185.1 feet	**Vertical Change**	.33"	5 ft	13	LF	$75	**$975**
104486	183.3 to 202.8 feet	Key Note Segment		5 ft	98			
104481	203.6 to 212.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
104467	206.4 to 207.4 feet	**Vertical Change**	3.24"	5 ft	5	REF		
104482	214.7 to 220.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
104468	220.2 to 221.2 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **STANFORD AVE** *Starting at:* **VALENCIA AVE** **$63,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121336	STARFISH CT	SHANNON AVE	SHANNON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95809	0.0 to 3.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
95810	3.2 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
95788	6.5 to 7.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
95811	11.9 to 13.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
95812	15.8 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
95835	21.4 to 51.3 feet	Key Note Segment		5 ft	150			
95789	22.6 to 23.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
95790	51.3 to 52.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
95813	52.5 to 62.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
95791	53.8 to 54.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
95836	64.9 to 84.8 feet	Key Note Segment		5 ft	99			
95792	65.7 to 66.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
95793	84.6 to 85.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
95814	86.4 to 93.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
95794	94.2 to 95.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
95815	94.3 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
95816	114.5 to 117.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
95795	114.9 to 115.9 feet	**Vertical Change**	-.61"	5 ft	5	REF		
95817	118.5 to 123.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
95837	124.7 to 145.0 feet	Key Note Segment		5 ft	102			
95818	146.0 to 168.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,380**
95819	168.3 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,020**
95838	196.8 to 216.4 feet	Key Note Segment		5 ft	98			
95820	217.2 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
95796	217.5 to 218.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
95797	219.8 to 220.8 feet	**Vertical Change**	.73"	5 ft	5	REF		
95839	221.5 to 242.8 feet	Key Note Segment		5 ft	107			
95798	242.2 to 243.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121336	STARFISH CT	SHANNON AVE	SHANNON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95821	243.2 to 259.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	80	SF	$40	$3,180
95840	259.1 to 280.0 feet	Key Note Segment		5 ft	104			
95799	268.6 to 269.6 feet	Vertical Change	-.28"	5 ft	5	REF		
95822	280.3 to 281.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	7	SF	$40	$260
95800	282.1 to 283.1 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
95801	287.0 to 288.0 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
95823	300.2 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
95841	304.1 to 323.3 feet	Key Note Segment		5 ft	96			
95802	304.3 to 305.3 feet	Vertical Change	.63"	5 ft	5	REF		
95803	314.0 to 315.0 feet	Vertical Change	.29"	5 ft	5	REF		
95804	324.2 to 325.2 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375
95824	333.9 to 335.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
95825	335.1 to 350.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,120
95826	351.3 to 377.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	$15,540
95842	377.2 to 396.7 feet	Key Note Segment		5 ft	98			
95827	399.9 to 400.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
95828	411.7 to 414.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
95843	421.3 to 451.0 feet	Key Note Segment		5 ft	149			
95829	452.0 to 456.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
95830	458.6 to 462.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580
95805	459.7 to 460.7 feet	Vertical Change	-.27"	5 ft	5	REF		
95806	463.2 to 466.8 feet	Vertical Change	.27"	5 ft	18	LF	$75	$1,350
95831	465.3 to 469.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
95844	472.0 to 491.5 feet	Key Note Segment		5 ft	98			
95807	472.4 to 473.4 feet	Vertical Change	.34"	5 ft	5	REF		
95808	482.0 to 483.0 feet	Vertical Change	-.34"	5 ft	5	REF		
95832	492.8 to 497.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
95833	498.5 to 504.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201121336	STARFISH CT	SHANNON AVE	SHANNON AVE	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95834	505.3 to 519.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
95845	515.4 to 518.7 feet		5.0-6.0%	5 ft	17			
95846	515.4 to 518.7 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: S/E/N *side of* **STARFISH CT** *Starting at:* **SHANNON AVE** **$127,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161334	STATE ST	LIBERTY LN	WESTBERRY BVD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86520	0.0 to 5.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
86521	10.3 to 23.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
86551	23.6 to 46.4 feet	Key Note Segment		5 ft	114			
86509	34.9 to 35.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
86522	47.7 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
86552	51.3 to 71.2 feet	Key Note Segment		5 ft	100			
86523	74.9 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
86524	78.7 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
86525	84.3 to 85.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
86526	89.2 to 98.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
86527	99.9 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
86553	106.1 to 136.3 feet	Key Note Segment		5 ft	151			
86511	125.3 to 126.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
86528	137.4 to 152.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,120**
86512	138.5 to 139.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
86529	153.3 to 158.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
86554	161.2 to 181.8 feet	Key Note Segment		5 ft	103			
86530	182.1 to 192.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	51	SF	$40	**$2,040**
86531	195.1 to 201.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
86532	201.4 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86533	203.5 to 214.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
86555	215.9 to 236.8 feet	Key Note Segment		5 ft	105			
86513	234.3 to 235.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
86534	238.4 to 261.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
86535	267.1 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86556	274.0 to 303.9 feet	Key Note Segment		5 ft	149			
86536	304.6 to 315.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,540**
86514	316.0 to 317.0 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161334	STATE ST	LIBERTY LN	WESTBERRY BVD	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86537	316.3 to 320.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
86538	322.6 to 323.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
86539	324.9 to 330.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
86557	330.4 to 361.6 feet	Key Note Segment		5 ft	156			
86515	335.3 to 336.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
86516	350.4 to 353.1 feet	**Vertical Change**	.26"	5 ft	14	REF		
86517	361.4 to 362.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
86540	365.3 to 375.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
86541	376.3 to 381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
86542	385.3 to 394.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
86543	395.3 to 396.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
86544	398.5 to 406.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
86558	407.4 to 437.6 feet	Key Note Segment		5 ft	151			
86518	412.1 to 413.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
86545	438.3 to 444.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	29	SF	$40	**$1,160**
86559	444.1 to 472.8 feet	Key Note Segment		5 ft	144			
86519	454.2 to 455.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
86546	473.3 to 475.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
86547	477.7 to 481.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
86548	481.1 to 486.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
86549	487.6 to 488.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86550	489.9 to 492.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
86560	491.6 to 492.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **STATE ST** *Starting at:* **LIBERTY LN** **$110,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161337	STATE ST	WESTBERRY BVD	LIBERTY LN	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86570	0.6 to 1.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
86571	4.6 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
86602	13.3 to 43.2 feet	Key Note Segment		5 ft	150			
86561	17.1 to 18.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
86572	44.5 to 48.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
86573	50.3 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
86603	54.3 to 74.4 feet	Key Note Segment		5 ft	101			
86574	74.4 to 75.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$260**
86575	75.7 to 80.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
86576	81.1 to 88.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
86577	88.5 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86578	94.9 to 97.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
86562	97.6 to 98.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
86579	104.5 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
86580	121.1 to 126.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
86604	126.2 to 158.1 feet	Key Note Segment		5 ft	160			
86581	159.9 to 168.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
86605	168.4 to 189.3 feet	Key Note Segment		5 ft	105			
86582	190.5 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
86583	196.3 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86584	204.8 to 207.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
86585	209.5 to 212.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
86586	214.9 to 219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
86587	219.5 to 224.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
86606	224.8 to 245.3 feet	Key Note Segment		5 ft	103			
86588	246.7 to 247.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86589	249.5 to 273.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
86590	273.1 to 284.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161337	STATE ST	WESTBERRY BVD	LIBERTY LN	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86591	287.3 to 293.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
86607	293.8 to 323.1 feet	Key Note Segment		5 ft	147			
86592	323.3 to 324.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	5	SF	$40	**$220**
86564	330.5 to 331.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
86593	331.0 to 334.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
86608	337.3 to 357.1 feet	Key Note Segment		5 ft	99			
86594	360.2 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
86595	375.4 to 382.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
86596	382.3 to 386.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
86597	389.9 to 395.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
86598	397.1 to 414.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
86565	412.6 to 413.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
86609	414.4 to 433.1 feet	Key Note Segment		5 ft	94			
86566	433.4 to 434.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
86599	434.2 to 438.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
86600	439.6 to 444.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
86610	446.0 to 466.0 feet	Key Note Segment		5 ft	100			
86567	447.6 to 448.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
86568	466.2 to 467.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
86601	467.2 to 491.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
86569	489.6 to 490.6 feet	**Vertical Change**	-.56"	5 ft	5	REF		
86611	490.4 to 491.4 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: N *side of* **STATE ST** *Starting at:* **WESTBERRY BVD** **$125,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140753	STEEPLE GATE	GRANADA DR	PRIVATE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63476	0.0 to 7.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
63477	8.7 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
63478	16.3 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
63473	22.4 to 23.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
63479	23.8 to 34.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
63480	37.6 to 40.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
63481	42.3 to 51.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
63482	51.9 to 56.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	25	SF	$120	**$2,940**
63483	60.3 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63474	60.8 to 61.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
63484	61.3 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
63485	79.4 to 80.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
63486	79.4 to 80.4 feet		5.0-6.0%	5 ft	5			
63475	79.9 to 80.9 feet	**Vertical Change**	-.46"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **STEEPLE GATE** *Starting at:* **GRANADA DR** **$35,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140755	STEEPLE GATE	PRIVATE	GRANADA DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63489	0.0 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
63490	4.2 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
63487	4.5 to 5.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
63491	9.1 to 14.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
63492	16.8 to 18.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63493	19.3 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
63494	28.4 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
63488	43.0 to 44.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
63495	49.8 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
63496	66.7 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
63497	82.8 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
63498	89.7 to 91.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **STEEPLE GATE** *Starting at:* **PRIVATE** **$36,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140958	STEPHANIE LN	2380 W CLEVELAND AVE	W CLEVELAND AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64825	0.2 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
64826	2.8 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
64815	18.8 to 19.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
64816	28.3 to 29.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
64827	32.2 to 36.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
64817	37.4 to 38.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
64828	40.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
64829	59.2 to 73.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
64830	75.3 to 88.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
64831	90.7 to 93.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
64832	93.4 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64833	98.2 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
64834	104.7 to 107.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
64835	108.4 to 119.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
64836	121.1 to 135.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
64837	136.8 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
64841	143.8 to 170.3 feet	Key Note Segment		5 ft	132			
64838	178.1 to 203.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
64818	182.9 to 183.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
64819	197.7 to 198.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
64839	208.3 to 209.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64820	210.0 to 211.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
64840	213.7 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	**$22,560**
64821	221.3 to 222.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
64822	232.1 to 233.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
64823	241.0 to 242.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
64824	249.3 to 250.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64842	250.2 to 251.3 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140958	STEPHANIE LN	2380 W CLEVELAND AVE	W CLEVELAND AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**E**	*side of* **STEPHANIE LN**	*Starting at:* **2380 W CLEVELAND AVE**					**$101,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140956	STEPHANIE LN	2390 STEPHANIE LN	2390 STEPHANIE LN	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64808	4.5 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
64806	15.4 to 16.4 feet	**Vertical Change**	.82"	5 ft	5	SF	$75	**$375**
64809	27.1 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64810	37.7 to 39.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64811	49.1 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
64812	61.8 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
64807	83.7 to 84.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
64813	90.7 to 116.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
64814	118.7 to 122.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **2390 STEPHANIE LN** **$39,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140819	STEPHANIE LN	2405 FREDERICK CT	FREDERICK CT	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63673	0.1 to 12.4 feet	Key Note Segment		5 ft	62			
63668	18.1 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
63669	25.7 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
63664	26.0 to 27.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
63670	36.8 to 44.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
63665	38.9 to 39.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
63671	44.4 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,660**
63666	44.8 to 45.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		
63667	77.6 to 78.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
63672	80.8 to 85.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: W *side of* **STEPHANIE LN** *Starting at:* **2405 FREDERICK CT** **$37,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140837	STEPHANIE LN	DUTRA CT	TREVOR CT	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63891	1.4 to 2.4 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
63903	6.7 to 15.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	$5,460
63892	11.0 to 12.0 feet	Vertical Change	-.29"	5 ft	5	REF		
63904	18.1 to 19.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$780
63905	20.4 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
63906	27.1 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
63907	39.1 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
63893	42.7 to 43.7 feet	Vertical Change	.27"	5 ft	5	REF		
63894	47.1 to 48.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
63908	48.3 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060
63895	54.8 to 55.8 feet	Vertical Change	-.26"	5 ft	5	REF		
63896	57.5 to 58.5 feet	Vertical Change	.31"	5 ft	5	REF		
63897	59.5 to 60.5 feet	Vertical Change	-.33"	5 ft	5	REF		
63909	60.4 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	$3,840
63910	71.1 to 79.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	$5,040
63916	79.5 to 95.1 feet	Key Note Segment		5 ft	78			
63898	94.7 to 95.7 feet	Vertical Change	.28"	5 ft	5	REF		
63911	96.5 to 102.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
63899	99.4 to 100.4 feet	Vertical Change	-.26"	5 ft	5	REF		
63912	104.4 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
63913	107.1 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
63914	111.7 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	170	SF	$120	$20,340
63900	119.0 to 120.0 feet	Vertical Change	3.59"	5 ft	5	REF		
63901	142.6 to 143.6 feet	Vertical Change	.26"	5 ft	5	REF		
63915	145.6 to 151.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
63902	149.1 to 150.1 feet	Vertical Change	.28"	5 ft	5	REF		
63917	149.7 to 150.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **STEPHANIE LN** *Starting at:* **DUTRA CT** **$60,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140950	STEPHANIE LN	DUTRA WAY	JUDITH WAY	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64758	0.8 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
64759	8.6 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
64760	20.8 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64761	25.9 to 30.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
64762	33.6 to 35.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64763	38.8 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
64764	52.2 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64757	56.1 to 57.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
64765	57.2 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
64766	63.3 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
64767	90.0 to 96.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
64768	99.8 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
64769	123.3 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$12,000**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **DUTRA WAY** **$61,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140826	STEPHANIE LN	FREDERICK CT	JUDITH CT	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63749	0.0 to 3.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
63750	4.2 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
63751	11.2 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,260**
63738	34.9 to 35.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
63752	38.2 to 45.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,500**
63753	46.5 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
63739	52.2 to 55.3 feet	**Vertical Change**	.33"	5 ft	16	REF		
63740	57.5 to 60.4 feet	**Vertical Change**	.32"	5 ft	15	REF		
63741	65.9 to 66.9 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
63754	68.8 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
63760	71.0 to 86.2 feet	Key Note Segment		5 ft	76			
63743	73.1 to 74.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
63744	77.9 to 78.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
63745	82.9 to 83.9 feet	**Vertical Change**	.41"	5 ft	5	REF		
63746	86.1 to 87.1 feet	**Vertical Change**	.57"	5 ft	5	REF		
63755	87.8 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
63756	95.5 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
63757	108.0 to 117.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
63758	120.9 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
63747	121.0 to 122.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
63748	133.5 to 134.5 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
63759	138.5 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**

TOTAL COST FOR: W *side of* **STEPHANIE LN** *Starting at:* **FREDERICK CT** **$62,985.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140953	STEPHANIE LN	FREDERICK WAY	JONATHAN WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64792	1.0 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
64793	7.1 to 31.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
64782	13.6 to 14.6 feet	**Vertical Change**	.45"	5 ft	5	REF		
64794	34.5 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
64783	42.2 to 43.2 feet	**Vertical Change**	.49"	5 ft	5	REF		
64795	44.1 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**
64784	49.2 to 50.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
64785	52.6 to 53.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
64786	54.9 to 55.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
64787	62.3 to 63.3 feet	**Vertical Change**	.52"	5 ft	5	REF		
64788	66.1 to 67.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
64789	80.4 to 81.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
64796	80.8 to 89.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
64797	90.7 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
64798	104.9 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
64790	112.0 to 113.0 feet	**Vertical Change**	-.67"	5 ft	5	REF		
64799	115.5 to 122.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
64800	123.7 to 126.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
64791	125.8 to 126.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
64801	134.2 to 136.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **FREDERICK WAY** **$68,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140954	STEPHANIE LN	JONATHAN WAY	PARKING LOT ENTRANCE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64802	3.3 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,900**
64803	30.3 to 40.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
64804	45.4 to 55.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
64805	55.3 to 56.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **JONATHAN WAY** **$28,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109140831	STEPHANIE LN	JUDITH CT	DUTRA CT	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63815	0.0 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	171	SF	$120	**$20,460**
63816	36.3 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
63817	48.4 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
63818	54.4 to 55.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
63819	57.6 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,120**
63820	91.2 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,880**
63821	128.6 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
63814	146.9 to 147.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
63822	146.9 to 147.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
63823	153.6 to 154.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: W *side of* **STEPHANIE LN** *Starting at:* **JUDITH CT** **$77,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140951	STEPHANIE LN	JUDITH WAY	FREDERICK WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64771	0.0 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
64772	3.0 to 6.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
64773	6.8 to 9.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
64774	15.8 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
64775	22.3 to 66.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	219	SF	$120	**$26,220**
64776	70.1 to 83.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
64770	79.1 to 80.1 feet	**Vertical Change**	.85"	5 ft	5	REF		
64777	83.5 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
64778	86.8 to 91.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
64779	95.3 to 101.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
64780	101.8 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
64781	108.8 to 143.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,700**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **JUDITH WAY** **$69,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109140856	STEPHANIE LN	TREVOR WAY	DUTRA WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64151	0.0 to 8.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
64152	11.0 to 29.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
64153	33.0 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
64154	56.0 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
64155	60.3 to 63.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
64156	66.9 to 68.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
64157	71.3 to 73.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
64158	79.1 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
64159	96.4 to 109.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
64165	103.3 to 104.3 feet	**Continuous Width**	30"	5 ft	5	SF	$120	**$600**
64160	109.0 to 123.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
64161	127.4 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
64150	145.6 to 146.6 feet	**Vertical Change**	2.47"	5 ft	5	REF		
64162	145.6 to 149.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
64163	150.1 to 151.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
64164	151.9 to 156.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: E *side of* **STEPHANIE LN** *Starting at:* **TREVOR WAY** **$73,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109150929	STEVEN COURT	PAMELA DR	PAMELA DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67250	0.3 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
67235	1.0 to 2.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
67275	3.0 to 23.7 feet	Key Note Segment		5 ft	104			
67236	7.4 to 8.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
67276	31.6 to 50.0 feet	Key Note Segment		5 ft	92			
67251	51.0 to 52.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
67252	57.8 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
67253	63.6 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
67254	77.4 to 80.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,620**
67277	81.3 to 97.8 feet	Key Note Segment		5 ft	83			
67255	105.0 to 107.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
67256	111.3 to 114.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
67257	117.1 to 121.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
67258	137.7 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67278	147.8 to 164.3 feet	Key Note Segment		5 ft	82			
67279	171.4 to 190.8 feet	Key Note Segment		5 ft	97			
67241	190.5 to 191.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
67259	191.6 to 192.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67280	198.0 to 212.9 feet	Key Note Segment		5 ft	75			
67242	206.9 to 207.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
67260	217.2 to 219.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	9	SF	$120	**$1,080**
67281	223.0 to 238.8 feet	Key Note Segment		5 ft	79			
67243	231.9 to 232.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
67261	242.6 to 243.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67282	246.0 to 262.3 feet	Key Note Segment		5 ft	82			
67244	268.2 to 271.1 feet	**Vertical Change**	-.36"	5 ft	15	LF	$75	**$1,088**
67245	271.9 to 272.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
67262	272.7 to 275.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109150929	STEVEN COURT	PAMELA DR	PAMELA DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67263	275.6 to 278.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
67246	286.0 to 287.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
67247	291.7 to 292.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
67264	296.4 to 299.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
67283	300.2 to 313.0 feet	Key Note Segment		5 ft	64			
67265	315.3 to 319.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
67266	320.0 to 324.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
67284	326.9 to 342.8 feet	Key Note Segment		5 ft	80			
67267	346.5 to 351.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
67268	353.9 to 355.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
67269	358.5 to 367.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
67285	368.4 to 383.6 feet	Key Note Segment		5 ft	76			
67270	383.7 to 406.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	112	SF	$40	**$4,460**
67248	389.7 to 390.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
67249	397.3 to 398.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
67271	410.5 to 414.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
67272	415.9 to 419.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
67273	419.9 to 421.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
67274	421.2 to 422.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: W / E *side of* **STEVEN COURT** *Starting at:* **PAMELA DR** **$53,397.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150925	STEVEN LANE	GLADE AVE	PAMELA DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67166	2.1 to 9.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
67139	8.4 to 9.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
67167	14.0 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
67140	24.6 to 25.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
67168	27.4 to 33.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
67221	34.9 to 53.9 feet	Key Note Segment		5 ft	95			
67141	37.7 to 38.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
67142	51.7 to 52.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
67169	55.4 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
67170	61.3 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
67143	61.4 to 62.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
67171	80.4 to 82.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
67172	88.7 to 95.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
67222	95.8 to 115.4 feet	Key Note Segment		5 ft	98			
67173	115.4 to 117.3 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	10	SF	$40	**$380**
67174	117.3 to 123.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
67175	127.6 to 134.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
67176	137.5 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
67177	141.1 to 152.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,660**
67178	155.7 to 157.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
67223	157.3 to 177.1 feet	Key Note Segment		5 ft	99			
67144	159.5 to 160.5 feet	**Vertical Change**	1.04"	5 ft	5	REF		
67179	177.2 to 178.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	5	SF	$40	**$200**
67145	178.1 to 179.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
67180	178.4 to 179.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
67181	182.4 to 189.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
67182	190.6 to 219.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
67224	219.6 to 240.1 feet	Key Note Segment		5 ft	103			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150925	STEVEN LANE	GLADE AVE	PAMELA DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67183	241.8 to 242.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67184	245.0 to 251.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
67185	251.7 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
67186	260.1 to 281.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
67146	280.6 to 281.6 feet	**Vertical Change**	.63"	5 ft	5	REF		
67225	281.3 to 301.2 feet	Key Note Segment		5 ft	100			
67187	301.7 to 302.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67147	301.9 to 302.9 feet	**Vertical Change**	-.6"	5 ft	5	REF		
67188	302.7 to 303.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
67189	305.9 to 307.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
67190	312.9 to 316.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
67191	321.8 to 329.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
67192	329.9 to 343.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
67226	343.5 to 362.9 feet	Key Note Segment		5 ft	97			
67148	363.4 to 364.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
67193	367.4 to 377.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
67194	378.9 to 402.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,280**
67149	393.1 to 394.1 feet	**Vertical Change**	-.75"	5 ft	5	REF		
67195	402.7 to 404.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
67227	405.2 to 425.3 feet	Key Note Segment		5 ft	101			
67150	406.1 to 407.1 feet	**Vertical Change**	.58"	5 ft	5	REF		
67152	425.4 to 426.4 feet	**Vertical Change**	-.44"	5 ft	5	REF		
67196	426.2 to 427.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
67197	430.4 to 432.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
67198	433.5 to 446.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
67199	446.9 to 460.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
67153	447.4 to 448.4 feet	**Vertical Change**	3.23"	5 ft	5	REF		
67154	457.8 to 458.8 feet	**Vertical Change**	-.67"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150925	STEVEN LANE	GLADE AVE	PAMELA DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67200	460.3 to 467.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
67155	468.0 to 469.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
67228	468.5 to 488.1 feet	Key Note Segment		5 ft	98			
67201	488.8 to 491.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
67202	491.5 to 497.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
67203	498.9 to 515.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
67156	505.3 to 506.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
67204	518.1 to 522.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
67205	522.5 to 527.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
67157	525.4 to 526.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
67229	529.2 to 549.6 feet	Key Note Segment		5 ft	102			
67158	530.4 to 531.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
67206	551.9 to 554.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
67207	554.7 to 574.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
67208	577.0 to 581.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
67230	588.5 to 610.6 feet	Key Note Segment		5 ft	111			
67209	616.0 to 617.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
67231	619.1 to 636.6 feet	Key Note Segment		5 ft	88			
67161	629.4 to 630.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
67210	645.3 to 651.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
67211	655.5 to 659.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
67162	656.3 to 657.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
67212	662.7 to 677.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
67163	668.5 to 669.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
67232	681.1 to 700.1 feet	Key Note Segment		5 ft	95			
67213	702.9 to 719.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
67214	727.2 to 732.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
67215	736.3 to 752.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150925	STEVEN LANE	GLADE AVE	PAMELA DR	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67164	752.1 to 753.1 feet	Vertical Change	.26"	5 ft	5	REF		
67216	755.9 to 757.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
67217	760.3 to 772.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
67218	775.5 to 776.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67233	776.9 to 796.3 feet	Key Note Segment		5 ft	97			
67219	798.0 to 806.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
67234	806.8 to 831.8 feet	Key Note Segment		5 ft	125			
67220	839.3 to 853.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**

TOTAL COST FOR: W *side of* **STEVEN LANE** *Starting at:* **GLADE AVE** **$254,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150936	STEVEN LANE	KIMBERLY DR	MARIE DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67331	1.6 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
67332	8.4 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
67333	14.1 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
67334	21.1 to 57.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	181	SF	$120	**$21,720**
67329	47.9 to 48.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
67335	60.8 to 62.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
67336	66.3 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67337	70.3 to 76.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
67338	79.1 to 82.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
67339	85.1 to 91.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
67330	87.3 to 88.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
67340	95.3 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
67341	103.8 to 114.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
67342	117.4 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
67343	123.9 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
67344	143.8 to 144.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
67345	146.7 to 148.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: E *side of* **STEVEN LANE** *Starting at:* **KIMBERLY DR** **$66,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150918	STEVEN LANE	MARIE DR	GLADE AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67128	1.3 to 2.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
67124	14.9 to 15.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
67125	28.8 to 29.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
67129	63.8 to 72.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
67130	92.8 to 96.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
67131	96.6 to 107.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
67126	106.0 to 107.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
67132	107.8 to 115.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
67133	115.6 to 117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
67134	122.5 to 127.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
67135	131.3 to 133.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
67127	135.0 to 136.0 feet	**Vertical Change**	2.07"	5 ft	5	SF	$75	**$375**
67136	136.8 to 140.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
67137	142.2 to 146.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
67138	146.8 to 147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: E *side of* **STEVEN LANE** *Starting at:* **MARIE DR** **$30,405.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150934	STEVEN LANE	PAMELA DR	KIMBERLY DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67295	0.8 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
67296	4.4 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
67321	9.4 to 30.3 feet	Key Note Segment		5 ft	105			
67297	32.0 to 40.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
67286	38.0 to 39.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
67298	43.2 to 55.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
67299	57.1 to 59.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
67322	60.5 to 77.8 feet	Key Note Segment		5 ft	87			
67300	80.3 to 83.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
67301	83.1 to 88.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
67302	90.8 to 94.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
67287	96.2 to 97.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
67303	99.3 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
67304	106.2 to 108.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
67323	109.2 to 125.2 feet	Key Note Segment		5 ft	80			
67288	118.5 to 119.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
67324	138.9 to 152.4 feet	Key Note Segment		5 ft	68			
67289	145.6 to 146.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
67305	158.2 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
67306	163.3 to 164.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67307	164.3 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67308	168.1 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
67290	170.5 to 171.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
67309	178.2 to 183.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
67291	181.3 to 182.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
67325	184.6 to 200.3 feet	Key Note Segment		5 ft	79			
67310	203.7 to 215.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
67311	215.5 to 222.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150934	STEVEN LANE	PAMELA DR	KIMBERLY DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67312	227.3 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
67292	249.8 to 250.8 feet	**Vertical Change**	-.96"	5 ft	5	REF		
67293	253.3 to 254.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
67326	253.6 to 269.7 feet	Key Note Segment		5 ft	81			
67313	273.2 to 275.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
67327	280.3 to 295.3 feet	Key Note Segment		5 ft	75			
67294	288.7 to 289.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
67314	300.6 to 301.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
67315	304.5 to 314.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,940**
67316	318.0 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
67317	322.8 to 323.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
67318	326.1 to 335.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	48	SF	$120	**$5,760**
67319	336.9 to 356.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	100	SF	$120	**$11,940**
67320	357.1 to 397.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	201	SF	$120	**$24,120**
67328	397.5 to 398.5 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **STEVEN LANE** *Starting at:* **PAMELA DR** **$115,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111044	STINSON AVE	A ST	SUNRISE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58206	0.1 to 28.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,860**
58207	29.7 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,240**
58208	60.1 to 63.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
58266	63.6 to 76.6 feet	Key Note Segment		5 ft	65			
58209	76.6 to 85.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	46	SF	$40	**$1,840**
58267	86.1 to 101.0 feet	Key Note Segment		5 ft	75			
58210	106.9 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
58211	123.0 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
58212	135.3 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
58268	148.8 to 159.9 feet	Key Note Segment		5 ft	55			
58213	159.9 to 162.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	12	SF	$40	**$480**
58214	162.3 to 169.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
58184	162.9 to 163.9 feet	Vertical Change	1"	5 ft	5	REF		
58269	170.2 to 184.7 feet	Key Note Segment		5 ft	73			
58215	185.4 to 213.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	140	SF	$40	**$5,580**
58186	197.4 to 198.4 feet	Vertical Change	.26"	5 ft	5	REF		
58216	215.6 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
58270	235.6 to 248.4 feet	Key Note Segment		5 ft	64			
58187	236.2 to 237.2 feet	Vertical Change	.44"	5 ft	5	REF		
58188	243.3 to 244.3 feet	Vertical Change	.79"	5 ft	5	REF		
58217	248.4 to 249.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
58218	254.9 to 267.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
58219	271.0 to 272.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
58189	272.5 to 273.5 feet	Vertical Change	2.36"	5 ft	5	SF	$75	**$375**
58220	275.7 to 277.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
58271	278.8 to 288.0 feet	Key Note Segment		5 ft	46			
58221	288.5 to 308.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	99	SF	$40	**$3,940**
58222	308.2 to 309.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111044	STINSON AVE	A ST	SUNRISE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58272	311.6 to 334.6 feet	Key Note Segment		5 ft	115			
58223	343.5 to 353.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
58273	354.3 to 380.8 feet	Key Note Segment		5 ft	133			
58190	378.3 to 379.3 feet	**Vertical Change**	-.77"	5 ft	5	REF		
58224	381.8 to 382.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
58225	386.8 to 399.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
58226	402.9 to 406.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
58227	415.0 to 419.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
58274	423.6 to 433.6 feet	Key Note Segment		5 ft	50			
58228	433.6 to 451.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	89	SF	$40	**$3,540**
58229	451.3 to 458.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
58275	458.8 to 472.8 feet	Key Note Segment		5 ft	70			
58191	466.5 to 467.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
58230	472.8 to 474.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
58231	481.5 to 482.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
58232	485.0 to 486.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
58233	489.0 to 490.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
58234	490.2 to 492.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
58235	499.1 to 502.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
58276	505.2 to 520.3 feet	Key Note Segment		5 ft	75			
58236	534.5 to 537.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
58237	539.8 to 542.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
58238	544.9 to 549.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
58277	549.8 to 560.3 feet	Key Note Segment		5 ft	53			
58239	560.3 to 563.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
58240	566.7 to 580.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
58241	584.0 to 587.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
58192	588.9 to 589.9 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111044	STINSON AVE	A ST	SUNRISE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58193	597.5 to 598.5 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
58278	601.0 to 612.8 feet	Key Note Segment		5 ft	59			
58194	611.1 to 612.1 feet	Vertical Change	.34"	5 ft	5	REF		
58242	612.8 to 617.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	21	SF	$40	$840
58243	623.5 to 627.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
58244	627.9 to 658.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	$18,420
58245	664.3 to 666.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
58279	669.0 to 688.3 feet	Key Note Segment		5 ft	97			
58195	685.0 to 686.0 feet	Vertical Change	.41"	5 ft	5	REF		
58246	688.8 to 691.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
58247	691.8 to 694.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
58248	695.4 to 721.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	$15,540
58280	721.3 to 737.4 feet	Key Note Segment		5 ft	81			
58196	736.3 to 737.3 feet	Vertical Change	.26"	5 ft	5	REF		
58249	738.5 to 763.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	$15,180
58250	764.3 to 767.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,860
58251	769.8 to 772.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
58281	772.8 to 787.5 feet	Key Note Segment		5 ft	74			
58197	785.8 to 786.8 feet	Vertical Change	.27"	5 ft	5	REF		
58252	787.5 to 805.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	91	SF	$40	$3,620
58253	809.5 to 815.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
58282	818.7 to 836.3 feet	Key Note Segment		5 ft	88			
58254	836.3 to 837.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	$220
58255	840.3 to 843.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
58256	845.8 to 851.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,600
58198	846.1 to 847.1 feet	Vertical Change	.33"	5 ft	5	REF		
58283	852.8 to 867.8 feet	Key Note Segment		5 ft	75			
58199	853.4 to 854.4 feet	Vertical Change	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111044	STINSON AVE	A ST	SUNRISE AVE	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58257	867.8 to 896.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	142	SF	$40	**$5,680**
58200	879.8 to 880.8 feet	Vertical Change	.26"	5 ft	5	REF		
58201	894.9 to 895.9 feet	Vertical Change	.46"	5 ft	5	REF		
58258	899.8 to 923.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
58284	923.3 to 938.2 feet	Key Note Segment		5 ft	75			
58259	938.3 to 941.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	**$640**
58202	938.5 to 939.5 feet	Vertical Change	.92"	5 ft	5	REF		
58285	942.8 to 957.3 feet	Key Note Segment		5 ft	73			
58260	958.8 to 962.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
58261	962.9 to 1003.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	205	SF	$120	**$24,540**
58203	990.2 to 991.2 feet	Vertical Change	.33"	5 ft	5	REF		
58286	1006.8 to 1024.8 feet	Key Note Segment		5 ft	90			
58204	1007.8 to 1008.8 feet	Vertical Change	2.13"	5 ft	5	REF		
58262	1025.0 to 1026.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	**$220**
58263	1026.3 to 1027.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58205	1035.0 to 1036.0 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
58264	1036.3 to 1037.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
58265	1038.2 to 1051.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

TOTAL COST FOR: E *side of* **STINSON AVE** *Starting at:* **A ST** **$273,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111052	STINSON AVE	SUNRISE AVE	A ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58317	0.0 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
58318	24.0 to 35.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
58371	35.9 to 48.9 feet	Key Note Segment		5 ft	65			
58287	49.4 to 50.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
58319	50.4 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,680**
58320	81.4 to 88.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
58288	83.4 to 84.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
58321	90.6 to 103.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
58322	103.4 to 107.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
58289	107.5 to 108.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
58323	108.5 to 109.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
58290	120.2 to 121.2 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
58324	122.7 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
58325	130.8 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
58291	132.5 to 133.5 feet	**Vertical Change**	2.19"	5 ft	5	REF		
58372	133.6 to 147.5 feet	Key Note Segment		5 ft	70			
58292	134.2 to 135.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
58326	147.8 to 159.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	59	SF	$40	**$2,380**
58373	159.7 to 173.6 feet	Key Note Segment		5 ft	70			
58293	160.3 to 161.3 feet	**Vertical Change**	-.69"	5 ft	5	REF		
58327	194.3 to 197.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
58294	208.3 to 209.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
58374	208.6 to 221.8 feet	Key Note Segment		5 ft	66			
58295	222.0 to 223.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
58328	223.6 to 255.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	159	SF	$120	**$19,080**
58329	255.4 to 290.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,300**
58296	281.8 to 282.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
58375	290.9 to 303.5 feet	Key Note Segment		5 ft	63			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111052	STINSON AVE	SUNRISE AVE	A ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58297	292.5 to 293.5 feet	Vertical Change	.31"	5 ft	5	REF		
58298	301.9 to 302.9 feet	Vertical Change	.26"	5 ft	5	REF		
58330	305.4 to 307.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
58376	308.3 to 321.1 feet	Key Note Segment		5 ft	64			
58299	309.1 to 310.1 feet	Vertical Change	.46"	5 ft	5	REF		
58300	323.5 to 324.5 feet	Vertical Change	.26"	5 ft	5	REF		
58331	323.5 to 341.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
58377	341.7 to 356.3 feet	Key Note Segment		5 ft	73			
58301	343.5 to 344.5 feet	Vertical Change	-.26"	5 ft	5	REF		
58332	357.1 to 377.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
58378	377.8 to 389.5 feet	Key Note Segment		5 ft	59			
58333	390.5 to 401.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	57	SF	$40	**$2,260**
58334	402.3 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
58335	407.4 to 422.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
58336	425.2 to 426.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58337	429.4 to 437.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
58338	438.3 to 441.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
58379	441.1 to 477.8 feet	Key Note Segment		5 ft	184			
58339	482.8 to 502.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
58340	508.0 to 511.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
58341	514.3 to 516.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
58342	519.0 to 533.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
58380	536.6 to 551.1 feet	Key Note Segment		5 ft	73			
58343	559.9 to 566.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
58381	569.3 to 583.9 feet	Key Note Segment		5 ft	73			
58302	570.4 to 571.4 feet	Vertical Change	.31"	5 ft	5	REF		
58344	584.6 to 587.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
58345	591.4 to 597.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111052	STINSON AVE	SUNRISE AVE	A ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58346	610.8 to 635.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
58382	635.3 to 650.1 feet	Key Note Segment		5 ft	74			
58303	637.7 to 638.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
58347	650.1 to 656.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	30	SF	$40	**$1,200**
58348	660.4 to 665.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
58349	665.0 to 666.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
58383	667.1 to 681.0 feet	Key Note Segment		5 ft	70			
58350	682.8 to 684.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
58351	688.4 to 710.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
58352	726.8 to 737.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
58304	737.8 to 738.8 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
58384	739.9 to 751.8 feet	Key Note Segment		5 ft	60			
58305	747.6 to 748.6 feet	**Vertical Change**	1.13"	5 ft	5	REF		
58306	750.6 to 751.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
58307	759.3 to 760.3 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
58353	761.6 to 771.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
58308	773.2 to 774.2 feet	**Vertical Change**	3.06"	5 ft	5	REF		
58354	773.9 to 776.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
58309	775.4 to 776.4 feet	**Vertical Change**	3.58"	5 ft	5	REF		
58355	776.9 to 784.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
58385	784.9 to 794.4 feet	Key Note Segment		5 ft	48			
58310	794.3 to 795.3 feet	**Vertical Change**	.46"	5 ft	5	REF		
58356	795.2 to 801.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
58386	801.2 to 813.2 feet	Key Note Segment		5 ft	60			
58311	811.9 to 812.9 feet	**Vertical Change**	.86"	5 ft	5	REF		
58357	814.3 to 822.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
58358	826.9 to 828.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
58359	829.8 to 836.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111052	STINSON AVE	SUNRISE AVE	A ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58360	838.8 to 846.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
58387	846.0 to 864.3 feet	Key Note Segment		5 ft	92			
58312	861.8 to 862.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
58361	864.9 to 880.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
58313	878.9 to 879.9 feet	**Vertical Change**	2.56"	5 ft	5	REF		
58388	881.7 to 898.8 feet	Key Note Segment		5 ft	86			
58362	899.7 to 905.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
58363	908.0 to 913.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
58314	916.0 to 917.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
58364	916.8 to 932.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
58365	932.4 to 934.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
58389	935.0 to 948.0 feet	Key Note Segment		5 ft	65			
58315	945.6 to 946.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
58366	950.1 to 951.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
58367	953.7 to 956.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
58368	959.0 to 1002.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	220	SF	$120	**$26,340**
58390	1002.9 to 1019.9 feet	Key Note Segment		5 ft	85			
58316	1019.6 to 1020.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
58369	1020.3 to 1043.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	117	SF	$40	**$4,680**
58370	1046.0 to 1051.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**

TOTAL COST FOR: W *side of* **STINSON AVE** *Starting at:* **SUNRISE AVE** **$311,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111159	STOREY RD	2020 SCARLET DR	EMERALD WY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133002	0.0 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,880**
133003	16.2 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
133004	22.0 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
133005	27.0 to 38.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
132997	32.4 to 33.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
132998	41.7 to 42.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
133006	42.4 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
133007	47.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
133008	54.0 to 60.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
133009	71.2 to 83.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
132999	73.2 to 74.2 feet	**Vertical Change**	.49"	5 ft	5	REF		
133000	78.4 to 79.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
133010	84.5 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
133001	102.6 to 103.6 feet	**Vertical Change**	.77"	5 ft	5	REF		
133011	102.7 to 114.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
133012	116.9 to 125.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
133013	127.9 to 137.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
133014	138.2 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **STOREY RD** *Starting at:* **2020 SCARLET DR** **$58,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111146	STOREY RD	CRIMSON WY	1875 STOREY RD	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132928	4.6 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
132929	10.1 to 26.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
132930	30.5 to 37.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
132931	40.5 to 62.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
132915	57.7 to 58.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
132932	66.6 to 97.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	153	SF	$120	**$18,360**
132916	77.4 to 78.4 feet	**Vertical Change**	.52"	5 ft	5	REF		
132917	82.9 to 83.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
132919	95.7 to 96.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
132933	98.7 to 112.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
132920	99.0 to 100.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
132921	102.5 to 103.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
132922	107.9 to 108.9 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
132923	112.5 to 113.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
132934	116.1 to 125.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
132924	117.0 to 118.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
132925	123.4 to 124.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
132935	126.0 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
132936	132.5 to 137.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
132926	136.7 to 137.7 feet	**Vertical Change**	.95"	5 ft	5	REF		
132937	137.2 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	228	SF	$120	**$27,360**
132938	185.3 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
132939	193.9 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
132927	197.1 to 198.1 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **STOREY RD** *Starting at:* **CRIMSON WY** **$103,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111154	STOREY RD	EMERALD WY	CRIMSON WY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132972	2.5 to 3.5 feet	Vertical Change	.53"	5 ft	5	SF	$75	$375
132977	6.5 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
132978	16.1 to 35.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	$11,820
132973	34.4 to 35.4 feet	Vertical Change	1.08"	5 ft	5	REF		
132979	38.2 to 53.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	$8,940
132980	53.9 to 58.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	$2,580
132981	58.2 to 65.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	$4,200
132982	65.4 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
132983	84.3 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
132984	88.4 to 92.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,400
132985	95.0 to 102.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
132986	103.0 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
132987	112.2 to 126.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	$8,460
132988	128.7 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	$6,000
132989	138.8 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,200
132974	150.7 to 151.7 feet	Vertical Change	.45"	5 ft	5	REF		
132990	153.1 to 161.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	$4,740
132991	163.3 to 164.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$780
132992	167.8 to 174.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,720
132993	175.6 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,420
132994	181.6 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	$17,820
132975	203.5 to 204.5 feet	Vertical Change	.63"	5 ft	5	SF	$75	$375
132976	210.5 to 211.5 feet	Vertical Change	-.27"	5 ft	5	REF		
132995	212.6 to 217.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
132996	216.1 to 217.3 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **STOREY RD** *Starting at:* **EMERALD WY** **$104,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201110	STRAUSS CT	438 STRAUSS CT	CRYSTAL WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75840	0.4 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,026**
75841	2.3 to 3.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$702**
75842	5.1 to 11.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
75819	11.3 to 12.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
75843	11.3 to 15.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,106**
75844	15.2 to 16.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$702**
75845	17.3 to 25.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,158**
75821	25.0 to 26.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
75846	27.3 to 29.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,404**
75822	29.4 to 30.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
75897	33.3 to 53.8 feet	Key Note Segment		5 ft	92			
75847	55.8 to 56.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$594**
75898	60.8 to 80.5 feet	Key Note Segment		5 ft	89			
75823	61.1 to 62.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
75824	80.4 to 81.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
75848	81.5 to 84.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,728**
75849	85.1 to 86.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$864**
75850	88.8 to 108.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	87	SF	$120	**$10,422**
75825	89.2 to 90.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
75826	91.5 to 92.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
75851	108.3 to 119.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,156**
75827	113.8 to 114.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
75852	120.4 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$972**
75853	122.2 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,214**
75854	126.3 to 130.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,484**
75828	126.4 to 127.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
75855	131.3 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
75899	133.3 to 153.9 feet	Key Note Segment		5 ft	93			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201110	STRAUSS CT	438 STRAUSS CT	CRYSTAL WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75856	154.7 to 158.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,782**
75900	158.7 to 179.2 feet	Key Note Segment		5 ft	92			
75857	179.2 to 183.1 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	18	SF	$40	**$702**
75858	183.1 to 190.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	32	SF	$120	**$3,888**
75859	190.3 to 195.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
75860	198.8 to 200.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	7	SF	$120	**$810**
75861	202.6 to 203.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$540**
75862	205.7 to 231.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,148**
75863	231.9 to 234.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
75901	234.0 to 256.4 feet	Key Note Segment		5 ft	101			
75829	245.1 to 246.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
75864	258.8 to 260.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
75865	262.3 to 264.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,242**
75866	265.1 to 270.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,808**
75867	270.3 to 291.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	96	SF	$120	**$11,502**
75868	292.7 to 297.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,592**
75869	299.1 to 300.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
75870	306.6 to 313.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,618**
75871	332.8 to 336.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,890**
75830	339.3 to 340.3 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$338**
75872	346.3 to 349.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,674**
75831	352.6 to 353.6 feet	**Vertical Change**	2.18"	5 ft	5	REF		
75873	352.9 to 354.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$702**
75832	354.8 to 357.4 feet	**Vertical Change**	.43"	5 ft	12	LF	$75	**$878**
75833	358.2 to 359.2 feet	**Vertical Change**	2.86"	5 ft	5	SF	$75	**$338**
75874	363.3 to 367.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,322**
75834	368.0 to 369.0 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$338**
75875	369.8 to 371.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$918**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201110	STRAUSS CT	438 STRAUSS CT	CRYSTAL WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75835	369.9 to 370.9 feet	Vertical Change	.51"	5 ft	5	REF		
75876	373.8 to 376.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,512
75877	377.7 to 381.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,944
75836	379.5 to 380.5 feet	Vertical Change	2.73"	5 ft	5	REF		
75878	385.5 to 387.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$864
75879	389.3 to 391.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$972
75880	393.8 to 396.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
75881	396.8 to 406.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,184
75882	413.1 to 417.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
75883	419.3 to 421.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,026
75884	429.6 to 438.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,698
75885	446.9 to 448.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$594
75886	450.5 to 456.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,078
75887	458.9 to 497.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	173	SF	$120	$20,736
75904	461.2 to 462.4 feet		5.0-6.0%	5 ft	5			
75888	497.7 to 505.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,266
75889	509.1 to 514.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,132
75890	515.1 to 532.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,396
75891	549.5 to 553.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,376
75892	559.4 to 560.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$810
75893	563.7 to 567.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,106
75837	567.9 to 568.9 feet	Vertical Change	.26"	5 ft	5	LF	$75	$338
75894	570.0 to 575.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	$3,078
75838	576.4 to 577.4 feet	Vertical Change	-.44"	5 ft	5	LF	$75	$338
75902	578.8 to 597.1 feet	Key Note Segment		5 ft	82			
75839	579.1 to 580.1 feet	Vertical Change	.53"	5 ft	5	REF		
75903	601.9 to 623.3 feet	Key Note Segment		5 ft	96			
75895	625.0 to 626.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$540

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2110201110	STRAUSS CT	438 STRAUSS CT	CRYSTAL WAY	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75896	628.9 to 641.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,750**

TOTAL COST FOR: S/E/N *side of* **STRAUSS CT** *Starting at:* **438 STRAUSS CT** **$175,743.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201121	STRAUSS CT	CRYSTAL WAY	DIAMOND WAY	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75991	0.9 to 5.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,538**
75992	5.8 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$810**
75993	10.1 to 13.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	16	SF	$120	**$1,890**
75994	13.6 to 18.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,646**
75995	18.9 to 20.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$756**
76020	20.8 to 41.6 feet	Key Note Segment		5 ft	94			
75996	43.8 to 47.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,782**
76021	47.6 to 68.3 feet	Key Note Segment		5 ft	93			
75997	69.1 to 70.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$540**
75998	70.3 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,046**
75999	85.2 to 88.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,566**
76000	88.1 to 90.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,458**
76001	94.3 to 95.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$648**
76002	96.6 to 105.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	41	SF	$120	**$4,860**
75982	100.3 to 101.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
76003	105.6 to 112.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	30	SF	$120	**$3,618**
75983	110.3 to 111.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
76004	113.8 to 117.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,052**
76022	117.6 to 138.6 feet	Key Note Segment		5 ft	95			
76005	139.7 to 143.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,998**
76023	143.6 to 164.7 feet	Key Note Segment		5 ft	95			
75984	164.3 to 165.3 feet	**Vertical Change**	-.38"	5 ft	5	REF		
76006	165.7 to 177.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,156**
75985	170.5 to 171.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
76007	177.1 to 183.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
76008	185.7 to 192.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,672**
75986	190.1 to 191.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
76009	193.1 to 202.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,238**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110201121	STRAUSS CT	CRYSTAL WAY	DIAMOND WAY	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
76010	204.9 to 207.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,134**
75987	205.6 to 206.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
76011	209.6 to 213.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,268**
76024	213.9 to 234.1 feet	Key Note Segment		5 ft	91			
75988	221.8 to 222.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
76012	238.2 to 239.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$810**
76025	239.8 to 261.2 feet	Key Note Segment		5 ft	96			
76013	262.0 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,372**
75989	268.9 to 269.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
76014	279.4 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,024**
76015	289.9 to 310.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,908**
76026	310.1 to 332.5 feet	Key Note Segment		5 ft	101			
76016	332.5 to 335.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$558**
76027	336.4 to 357.4 feet	Key Note Segment		5 ft	95			
75990	337.2 to 338.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
76017	358.4 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,916**
76018	366.2 to 367.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$756**
76019	369.7 to 378.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,914**

TOTAL COST FOR: N *side of* **STRAUSS CT** *Starting at:* **CRYSTAL WAY** **$87,336.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110201104	STRAUSS LN	308 STRAUSS LN	438 STRAUSS LN	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
75797	0.7 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$864**
75798	2.6 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,296**
75792	6.0 to 7.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$338**
75799	7.2 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,210**
75800	21.6 to 23.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,242**
75801	27.1 to 35.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
75813	35.3 to 56.4 feet	Key Note Segment		5 ft	95			
75802	56.7 to 58.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,026**
75814	60.2 to 83.3 feet	Key Note Segment		5 ft	104			
75793	61.1 to 62.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
75794	81.6 to 82.6 feet	**Vertical Change**	-.91"	5 ft	5	REF		
75803	83.3 to 132.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	223	SF	$40	**$8,910**
75815	132.8 to 155.0 feet	Key Note Segment		5 ft	100			
75804	155.8 to 160.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,376**
75816	160.2 to 180.8 feet	Key Note Segment		5 ft	93			
75805	181.9 to 183.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$918**
75806	185.3 to 188.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,782**
75807	189.7 to 204.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	65	SF	$120	**$7,776**
75795	194.2 to 195.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
75808	204.1 to 208.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,106**
75809	208.4 to 211.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,890**
75810	215.8 to 235.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,746**
75817	235.7 to 256.8 feet	Key Note Segment		5 ft	95			
75811	258.2 to 260.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,350**
75818	261.0 to 282.9 feet	Key Note Segment		5 ft	99			
75812	285.4 to 292.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,834**
75796	287.2 to 288.2 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **STRAUSS LN** *Starting at:* **308 STRAUSS LN** **$56,983.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161058	SUBURBAN AVE	BOULDER AVE	DOUBLE TREE WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70503	0.4 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
70504	10.5 to 13.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
70499	14.1 to 15.1 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
70505	22.3 to 37.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
70500	47.0 to 48.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
70506	50.7 to 66.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
70507	99.8 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
70508	129.2 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
70501	140.5 to 141.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
70502	152.2 to 153.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
70509	152.6 to 153.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
70510	154.6 to 157.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
70511	157.9 to 160.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
70512	157.9 to 160.7 feet		5.0-6.0%	5 ft	14			
70513	157.9 to 160.7 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **SUBURBAN AVE** *Starting at:* **BOULDER AVE** **$48,870.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161109	SUBURBAN AVE	DOUBLE TREE WAY	TRABON WAY	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70633	3.0 to 12.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
70630	3.7 to 4.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
70634	17.1 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
70631	20.9 to 21.9 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
70635	23.8 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
70636	30.6 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
70632	33.8 to 34.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
70643	38.4 to 65.3 feet	Key Note Segment		5 ft	135			
70637	65.6 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
70638	86.9 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
70639	114.6 to 117.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
70644	118.1 to 143.9 feet	Key Note Segment		5 ft	129			
70640	144.0 to 148.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
70641	148.2 to 151.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
70642	156.0 to 158.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: E *side of* **SUBURBAN AVE** *Starting at:* **DOUBLE TREE WAY** **$41,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109161040	SUBURBAN AVE	DOUBLE TREE WAY	BOULDER AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70264	0.2 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
70265	5.0 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
70266	18.8 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
70297	25.8 to 48.4 feet	Key Note Segment		5 ft	113			
70267	49.8 to 75.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	128	SF	$120	**$15,360**
70268	75.4 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
70298	85.6 to 107.4 feet	Key Note Segment		5 ft	109			
70244	86.9 to 87.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
70245	98.2 to 99.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
70269	108.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
70299	145.1 to 169.2 feet	Key Note Segment		5 ft	121			
70270	171.1 to 180.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
70300	180.5 to 203.3 feet	Key Note Segment		5 ft	114			
70246	205.1 to 206.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
70271	205.3 to 207.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
70272	210.2 to 217.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
70273	222.4 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
70274	228.8 to 244.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
70301	245.4 to 268.2 feet	Key Note Segment		5 ft	114			
70247	247.0 to 248.0 feet	**Vertical Change**	.51"	5 ft	5	REF		
70248	257.8 to 258.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
70275	268.2 to 275.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	37	SF	$40	**$1,460**
70276	275.8 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
70277	295.3 to 304.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
70249	301.9 to 302.9 feet	**Vertical Change**	.92"	5 ft	5	REF		
70278	304.5 to 312.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
70250	307.2 to 311.2 feet	**Vertical Change**	-.34"	5 ft	20	REF		
70279	314.7 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109161040	SUBURBAN AVE	DOUBLE TREE WAY	BOULDER AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70302	316.3 to 339.0 feet	Key Note Segment		5 ft	114			
70251	317.9 to 318.9 feet	Vertical Change	-.33"	5 ft	5	REF		
70252	321.2 to 322.2 feet	Vertical Change	.49"	5 ft	5	REF		
70253	328.4 to 329.4 feet	Vertical Change	.38"	5 ft	5	REF		
70280	339.0 to 344.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	**$1,060**
70254	340.4 to 341.4 feet	Vertical Change	.35"	5 ft	5	REF		
70281	350.7 to 353.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
70282	357.3 to 358.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70303	360.6 to 381.8 feet	Key Note Segment		5 ft	106			
70255	361.3 to 365.3 feet	Vertical Change	-.29"	5 ft	20	REF		
70256	372.9 to 373.9 feet	Vertical Change	-.26"	5 ft	5	REF		
70257	395.0 to 396.0 feet	Vertical Change	-.39"	5 ft	5	LF	$75	**$375**
70304	398.8 to 416.7 feet	Key Note Segment		5 ft	90			
70258	403.7 to 404.7 feet	Vertical Change	.62"	5 ft	5	REF		
70259	410.6 to 411.6 feet	Vertical Change	.68"	5 ft	5	REF		
70283	418.1 to 419.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70260	425.2 to 428.6 feet	Vertical Change	.53"	5 ft	17	REF		
70284	426.2 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
70305	430.2 to 450.8 feet	Key Note Segment		5 ft	103			
70261	435.7 to 436.7 feet	Vertical Change	-.39"	5 ft	5	REF		
70262	441.8 to 442.8 feet	Vertical Change	.37"	5 ft	5	REF		
70285	451.4 to 455.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	21	SF	$40	**$840**
70286	469.5 to 479.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
70263	477.6 to 478.6 feet	Vertical Change	-.27"	5 ft	5	REF		
70287	482.1 to 493.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
70306	493.3 to 517.8 feet	Key Note Segment		5 ft	122			
70288	518.0 to 520.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	**$580**
70289	521.4 to 525.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109161040	SUBURBAN AVE	DOUBLE TREE WAY	BOULDER AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70290	535.4 to 537.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
70291	539.2 to 546.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
70292	549.6 to 550.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
70293	555.3 to 556.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
70294	556.4 to 558.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
70295	566.4 to 572.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
70296	572.7 to 574.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
70307	572.7 to 574.3 feet		5.0-6.0%	5 ft	8			
70308	574.3 to 575.5 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: W / E *side of* **SUBURBAN AVE** *Starting at:* **DOUBLE TREE WAY** **$134,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161032	SUBURBAN AVE	RIVERVIEW DR	DOUBLE TREE WAY	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70186	0.0 to 8.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
70173	0.9 to 1.9 feet	**Vertical Change**	-.36"	5 ft	5	REF		
70187	11.7 to 24.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
70188	26.8 to 27.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
70220	31.2 to 54.1 feet	Key Note Segment		5 ft	115			
70189	54.1 to 56.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$560**
70174	54.4 to 55.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
70190	58.4 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
70191	74.2 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
70221	81.3 to 101.8 feet	Key Note Segment		5 ft	103			
70192	106.8 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,380**
70222	139.3 to 160.8 feet	Key Note Segment		5 ft	108			
70193	170.2 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
70175	171.1 to 172.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
70194	179.8 to 201.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
70195	205.2 to 217.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
70176	207.4 to 208.4 feet	**Vertical Change**	.64"	5 ft	5	REF		
70223	220.6 to 235.4 feet	Key Note Segment		5 ft	74			
70196	237.0 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
70197	241.3 to 247.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
70198	249.3 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
70224	251.6 to 273.3 feet	Key Note Segment		5 ft	109			
70177	252.2 to 253.2 feet	**Vertical Change**	-.41"	5 ft	5	REF		
70178	260.4 to 261.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
70179	275.8 to 276.8 feet	**Vertical Change**	.77"	5 ft	5	REF		
70199	276.2 to 278.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
70200	286.7 to 293.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
70201	297.2 to 308.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161032	SUBURBAN AVE	RIVERVIEW DR	DOUBLE TREE WAY	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70202	308.7 to 311.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
70225	312.2 to 331.1 feet	Key Note Segment		5 ft	95			
70180	315.5 to 316.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
70203	331.1 to 368.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	186	SF	$40	**$7,420**
70181	357.5 to 358.5 feet	**Vertical Change**	.53"	5 ft	5	REF		
70204	371.0 to 387.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
70205	387.0 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
70226	390.8 to 416.3 feet	Key Note Segment		5 ft	128			
70206	416.3 to 429.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	68	SF	$40	**$2,700**
70182	428.5 to 429.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70207	429.8 to 431.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
70227	433.1 to 450.5 feet	Key Note Segment		5 ft	87			
70208	450.7 to 462.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
70209	462.8 to 470.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
70210	473.8 to 487.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
70211	488.3 to 495.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
70228	497.2 to 519.5 feet	Key Note Segment		5 ft	112			
70212	520.5 to 523.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$580**
70213	523.4 to 539.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
70214	540.0 to 545.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
70229	552.6 to 574.2 feet	Key Note Segment		5 ft	108			
70183	566.5 to 567.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
70215	576.5 to 584.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
70184	577.3 to 578.3 feet	**Vertical Change**	-1.34"	5 ft	5	REF		
70216	584.9 to 586.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
70185	587.9 to 588.9 feet	**Vertical Change**	.67"	5 ft	5	REF		
70217	588.8 to 591.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
70218	594.5 to 598.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109161032	SUBURBAN AVE	RIVERVIEW DR	DOUBLE TREE WAY	35

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70219	598.5 to 605.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
70230	602.8 to 604.2 feet		5.0-6.0%	5 ft	7			
70231	604.2 to 605.3 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: W *side of* **SUBURBAN AVE** *Starting at:* **RIVERVIEW DR** **$162,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161027	SUBURBAN AVE	TRAGON ST	RIVERVIEW DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70150	1.5 to 5.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
70151	6.1 to 9.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
70152	11.8 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
70145	17.9 to 18.9 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
70153	23.3 to 33.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
70154	37.1 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
70155	56.0 to 78.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,740**
70156	78.9 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
70157	94.7 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
70168	102.8 to 125.4 feet	Key Note Segment		5 ft	113			
70158	130.6 to 172.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,380**
70169	174.4 to 193.1 feet	Key Note Segment		5 ft	94			
70146	176.0 to 177.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
70159	204.5 to 207.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
70170	207.2 to 229.7 feet	Key Note Segment		5 ft	113			
70147	216.2 to 217.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
70160	230.5 to 259.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	147	SF	$40	**$5,860**
70148	231.3 to 232.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
70161	260.1 to 290.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
70171	290.1 to 304.2 feet	Key Note Segment		5 ft	70			
70149	291.7 to 292.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
70162	305.9 to 313.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
70163	317.0 to 324.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
70164	327.6 to 330.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
70172	330.8 to 352.3 feet	Key Note Segment		5 ft	108			
70165	352.3 to 354.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
70166	357.8 to 373.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
70167	375.8 to 380.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109161027	SUBURBAN AVE	TRAGON ST	RIVERVIEW DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: E		*side of* **SUBURBAN AVE**	*Starting at:* **TRAGON ST**					**$123,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151519	SULTANA DR	3171 SULTANA DR	TIMBERLINE DR	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83900	3.2 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83901	4.3 to 6.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
83902	10.7 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
83897	20.1 to 21.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
83907	23.1 to 46.6 feet	Key Note Segment		5 ft	118			
83898	49.6 to 50.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
83903	50.3 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83908	53.3 to 82.5 feet	Key Note Segment		5 ft	146			
83904	82.8 to 87.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
83905	92.3 to 93.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
83909	94.5 to 95.9 feet		5.0-6.0%	5 ft	7			
83906	95.3 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
83910	95.9 to 97.4 feet		6.0-7.0%	5 ft	8			
83899	97.3 to 98.3 feet	**Vertical Change**	.49"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SULTANA DR** *Starting at:* **3171 SULTANA DR** **$13,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151518	SULTANA DR	CREEK DR	3161 SULTANA DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83879	0.3 to 3.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	15	SF	$120	**$1,800**
83880	4.6 to 6.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
83881	8.0 to 12.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
83882	13.5 to 31.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
83883	33.2 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
83884	43.7 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83885	45.8 to 48.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
83886	48.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
83887	58.7 to 60.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
83888	60.6 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
83889	66.0 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
83890	78.3 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
83891	82.2 to 83.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83896	84.4 to 106.5 feet	Key Note Segment		5 ft	111			
83876	85.6 to 86.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
83892	107.3 to 117.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
83893	121.5 to 123.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
83877	122.8 to 123.8 feet	**Vertical Change**	1.15"	5 ft	5	REF		
83894	124.2 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83878	127.1 to 128.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
83895	127.7 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: N *side of* **SULTANA DR** *Starting at:* **CREEK DR** **$46,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83709	1.0 to 21.1 feet	Key Note Segment		5 ft	101			
83570	3.2 to 4.2 feet	Vertical Change	.75"	5 ft	5	REF		
83572	22.4 to 23.4 feet	Vertical Change	-.37"	5 ft	5	REF		
83622	22.9 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83710	24.2 to 44.9 feet	Key Note Segment		5 ft	104			
83573	32.9 to 33.9 feet	Vertical Change	.34"	5 ft	5	REF		
83623	44.9 to 51.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	31	SF	$40	**$1,240**
83574	56.9 to 57.9 feet	Vertical Change	.72"	5 ft	5	SF	$75	**$375**
83624	58.0 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
83625	73.7 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
83626	80.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83711	81.9 to 110.6 feet	Key Note Segment		5 ft	143			
83575	99.6 to 100.6 feet	Vertical Change	-.32"	5 ft	5	REF		
83627	112.3 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
83628	115.6 to 119.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
83629	122.1 to 129.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
83630	133.0 to 146.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
83576	140.6 to 141.6 feet	Vertical Change	-.26"	5 ft	5	REF		
83712	148.3 to 168.8 feet	Key Note Segment		5 ft	102			
83577	169.6 to 170.6 feet	Vertical Change	-.28"	5 ft	5	REF		
83631	169.6 to 174.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
83632	176.9 to 180.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
83633	182.8 to 185.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
83634	187.3 to 195.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
83713	195.8 to 225.7 feet	Key Note Segment		5 ft	150			
83578	224.9 to 225.9 feet	Vertical Change	-.26"	5 ft	5	REF		
83635	227.8 to 228.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
83579	228.2 to 229.2 feet	Vertical Change	-.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83636	231.8 to 238.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,080**
83637	239.3 to 240.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
83638	242.1 to 243.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83639	243.8 to 245.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
83640	245.5 to 247.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
83714	250.3 to 279.9 feet	Key Note Segment		5 ft	148			
83641	284.8 to 286.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
83715	288.4 to 318.8 feet	Key Note Segment		5 ft	152			
83642	319.2 to 320.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
83643	322.2 to 323.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
83644	330.8 to 335.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
83645	336.6 to 338.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
83580	340.2 to 341.2 feet	**Vertical Change**	-.64"	5 ft	5	SF	$75	**$375**
83646	344.2 to 345.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83581	345.0 to 346.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
83647	355.5 to 366.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
83648	366.6 to 370.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
83716	372.1 to 393.3 feet	Key Note Segment		5 ft	106			
83582	372.9 to 373.9 feet	**Vertical Change**	.95"	5 ft	5	REF		
83649	394.1 to 402.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,280**
83717	403.6 to 423.8 feet	Key Note Segment		5 ft	101			
83583	404.6 to 405.6 feet	**Vertical Change**	-.36"	5 ft	5	REF		
83584	423.4 to 424.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
83650	424.3 to 425.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$240**
83651	428.6 to 437.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
83652	441.0 to 456.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
83718	456.8 to 486.3 feet	Key Note Segment		5 ft	148			
83585	467.6 to 468.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83586	486.8 to 487.8 feet	Vertical Change	.4"	5 ft	5	REF		
83653	487.4 to 488.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
83654	489.3 to 490.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
83587	490.4 to 491.4 feet	Vertical Change	-.26"	5 ft	5	REF		
83588	495.1 to 496.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
83655	498.0 to 502.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
83656	502.9 to 508.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,180
83589	504.0 to 505.0 feet	Vertical Change	1.64"	5 ft	5	REF		
83590	508.6 to 509.6 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
83657	514.1 to 516.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
83591	516.3 to 517.3 feet	Vertical Change	-.57"	5 ft	5	SF	$75	$375
83592	518.8 to 523.9 feet	Vertical Change	.37"	5 ft	26	LF	$75	$1,913
83658	520.6 to 522.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
83593	524.6 to 527.4 feet	Vertical Change	.78"	5 ft	14	SF	$75	$1,050
83594	529.1 to 532.9 feet	Vertical Change	.38"	5 ft	19	LF	$75	$1,425
83595	533.7 to 534.7 feet	Vertical Change	2.06"	5 ft	5	SF	$75	$375
83596	536.0 to 537.0 feet	Vertical Change	3.45"	5 ft	5	SF	$75	$375
83659	537.6 to 541.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
83597	537.7 to 538.7 feet	Vertical Change	.34"	5 ft	5	REF		
83719	541.8 to 562.6 feet	Key Note Segment		5 ft	104			
83598	542.3 to 543.3 feet	Vertical Change	-.26"	5 ft	5	REF		
83660	564.1 to 565.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
83661	567.3 to 572.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	$2,820
83720	572.8 to 602.5 feet	Key Note Segment		5 ft	149			
83599	574.2 to 577.5 feet	Vertical Change	3.48"	5 ft	16	REF		
83662	606.7 to 607.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
83600	608.7 to 609.7 feet	Vertical Change	-.42"	5 ft	5	REF		
83663	609.1 to 630.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	$12,840

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83601	630.1 to 631.1 feet	Vertical Change	.3"	5 ft	5	REF		
83664	633.5 to 635.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
83602	634.8 to 635.8 feet	Vertical Change	.3"	5 ft	5	REF		
83665	635.7 to 637.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
83666	639.3 to 642.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,920
83721	643.8 to 673.2 feet	Key Note Segment		5 ft	147			
83603	663.0 to 664.0 feet	Vertical Change	.42"	5 ft	5	REF		
83667	673.8 to 677.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
83668	680.3 to 681.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
83669	685.2 to 689.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	$2,280
83670	695.0 to 698.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
83722	699.9 to 729.2 feet	Key Note Segment		5 ft	147			
83671	730.3 to 737.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,320
83723	742.8 to 771.7 feet	Key Note Segment		5 ft	145			
83672	773.1 to 782.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
83673	784.6 to 787.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,740
83674	790.8 to 795.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,580
83675	798.3 to 801.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,740
83676	805.3 to 810.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	$2,820
83724	812.9 to 841.7 feet	Key Note Segment		5 ft	144			
83606	841.6 to 842.6 feet	Vertical Change	.26"	5 ft	5	REF		
83677	842.8 to 847.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
83725	848.0 to 871.0 feet	Key Note Segment		5 ft	115			
83726	872.2 to 896.1 feet	Key Note Segment		5 ft	120			
83678	898.0 to 905.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	$4,200
83679	908.8 to 916.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	$4,800
83727	917.0 to 945.5 feet	Key Note Segment		5 ft	143			
83607	918.3 to 919.3 feet	Vertical Change	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83608	945.2 to 946.2 feet	Vertical Change	.36"	5 ft	5	REF		
83680	947.7 to 948.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83681	950.3 to 959.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
83728	959.9 to 987.6 feet	Key Note Segment		5 ft	139			
83609	971.5 to 972.5 feet	Vertical Change	-.28"	5 ft	5	REF		
83610	987.3 to 988.3 feet	Vertical Change	-.29"	5 ft	5	REF		
83682	993.8 to 998.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
83729	998.1 to 1021.8 feet	Key Note Segment		5 ft	119			
83611	999.1 to 1000.1 feet	Vertical Change	-.31"	5 ft	5	REF		
83683	1024.0 to 1038.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,460**
83730	1038.1 to 1066.0 feet	Key Note Segment		5 ft	140			
83612	1046.9 to 1047.9 feet	Vertical Change	.49"	5 ft	5	REF		
83613	1062.3 to 1063.3 feet	Vertical Change	.28"	5 ft	5	REF		
83684	1067.7 to 1095.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,380**
83731	1096.7 to 1120.5 feet	Key Note Segment		5 ft	119			
83685	1121.3 to 1129.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
83732	1129.3 to 1152.6 feet	Key Note Segment		5 ft	116			
83614	1157.1 to 1158.1 feet	Vertical Change	.29"	5 ft	5	REF		
83686	1157.6 to 1162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
83687	1162.8 to 1164.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
83615	1170.1 to 1171.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	**$375**
83688	1173.9 to 1179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
83689	1179.4 to 1180.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
83690	1185.6 to 1186.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
83616	1190.6 to 1191.6 feet	Vertical Change	2.41"	5 ft	5	SF	$75	**$375**
83691	1195.2 to 1207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
83733	1209.3 to 1239.2 feet	Key Note Segment		5 ft	150			
83692	1239.7 to 1241.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112151506	SULTANA DR	TIMBERLINE DR	CREEK DR	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83693	1245.5 to 1246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
83734	1251.8 to 1282.3 feet	Key Note Segment		5 ft	153			
83694	1284.8 to 1290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
83695	1292.8 to 1299.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
83696	1307.0 to 1311.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
83697	1313.3 to 1325.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
83735	1327.2 to 1356.8 feet	Key Note Segment		5 ft	148			
83617	1328.5 to 1329.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
83618	1356.8 to 1357.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
83698	1357.9 to 1359.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
83699	1359.3 to 1363.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
83700	1364.8 to 1367.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
83701	1368.5 to 1370.1 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	8	SF	$120	**$960**
83736	1371.8 to 1402.5 feet	Key Note Segment		5 ft	154			
83619	1402.7 to 1403.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
83702	1403.3 to 1415.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,200**
83703	1418.4 to 1423.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
83704	1438.7 to 1456.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
83737	1457.1 to 1488.8 feet	Key Note Segment		5 ft	159			
83705	1489.3 to 1492.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$700**
83738	1494.7 to 1526.7 feet	Key Note Segment		5 ft	160			
83706	1528.1 to 1532.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
83620	1528.5 to 1529.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
83707	1534.8 to 1544.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
83708	1544.0 to 1546.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
83621	1544.6 to 1545.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		

TOTAL COST FOR: S/E/N *side of* **SULTANA DR** *Starting at:* **TIMBERLINE DR** **$278,402.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151342	SUMMER LN	3121 SUMMER LN	TIMBERLINE DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82666	1.1 to 14.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,740**
82667	15.8 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
82692	24.8 to 26.1 feet		5.0-6.0%	5 ft	7			
82668	38.7 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82669	42.7 to 56.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
82686	58.2 to 78.6 feet	Key Note Segment		5 ft	102			
82659	59.2 to 60.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
82670	82.1 to 83.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
82687	83.3 to 102.7 feet	Key Note Segment		5 ft	97			
82661	102.3 to 103.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
82671	103.7 to 112.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
82672	114.8 to 120.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
82673	123.2 to 146.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,100**
82674	149.8 to 156.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
82675	160.4 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
82688	165.3 to 185.7 feet	Key Note Segment		5 ft	102			
82676	185.8 to 190.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
82689	190.3 to 209.9 feet	Key Note Segment		5 ft	98			
82662	209.3 to 210.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
82677	211.0 to 232.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
82678	233.1 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
82679	250.3 to 268.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
82663	271.8 to 272.8 feet	**Vertical Change**	3.27"	5 ft	5	SF	$75	**$375**
82690	272.6 to 292.0 feet	Key Note Segment		5 ft	97			
82664	281.9 to 282.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
82680	293.1 to 295.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
82691	297.2 to 316.4 feet	Key Note Segment		5 ft	96			
82681	317.4 to 322.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151342	SUMMER LN	3121 SUMMER LN	TIMBERLINE DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82665	320.4 to 321.4 feet	Vertical Change	1.54"	5 ft	5	REF		
82682	324.3 to 325.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82683	328.2 to 330.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
82684	338.1 to 339.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
82685	340.4 to 342.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82693	341.0 to 342.5 feet		5.0-6.0%	5 ft	8			
82694	342.8 to 344.0 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: N *side of* **SUMMER LN** *Starting at:* **3121 SUMMER LN** **$102,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151335	SUMMER LN	DOUBLE TREE WAY	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82598	9.8 to 10.8 feet	Vertical Change	.67"	5 ft	5	REF		
82614	10.3 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
82599	19.1 to 20.1 feet	Vertical Change	-.43"	5 ft	5	LF	$75	**$375**
82639	19.9 to 40.8 feet	Key Note Segment		5 ft	104			
82600	22.8 to 23.8 feet	Vertical Change	.32"	5 ft	5	REF		
82601	29.5 to 30.5 feet	Vertical Change	.43"	5 ft	5	REF		
82602	37.6 to 38.6 feet	Vertical Change	.3"	5 ft	5	REF		
82615	41.1 to 42.2 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
82616	42.2 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
82640	46.1 to 66.5 feet	Key Note Segment		5 ft	102			
82603	46.8 to 47.8 feet	Vertical Change	.54"	5 ft	5	REF		
82604	58.9 to 64.4 feet	Vertical Change	.37"	5 ft	28	REF		
82617	67.1 to 68.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
82605	67.9 to 68.9 feet	Vertical Change	.37"	5 ft	5	REF		
82618	71.3 to 80.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
82606	72.3 to 73.3 feet	Vertical Change	3.47"	5 ft	5	REF		
82619	83.7 to 104.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	104	SF	$120	**$12,420**
82620	104.8 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82621	106.3 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
82622	110.8 to 113.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
82623	114.7 to 117.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
82624	118.4 to 120.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
82625	122.4 to 124.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82607	126.0 to 127.0 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**
82641	126.0 to 146.8 feet	Key Note Segment		5 ft	104			
82626	150.1 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
82642	152.2 to 173.4 feet	Key Note Segment		5 ft	106			
82627	179.2 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151335	SUMMER LN	DOUBLE TREE WAY	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82608	182.0 to 183.0 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
82628	192.7 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
82629	205.0 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
82630	212.8 to 216.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
82609	214.1 to 215.1 feet	Vertical Change	.27"	5 ft	5	REF		
82631	219.3 to 224.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
82610	226.2 to 227.2 feet	Vertical Change	-.28"	5 ft	5	REF		
82632	226.3 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
82633	229.1 to 233.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
82634	233.2 to 236.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
82611	237.5 to 238.5 feet	Vertical Change	.51"	5 ft	5	SF	$75	$375
82643	237.9 to 258.3 feet	Key Note Segment		5 ft	102			
82612	247.8 to 248.8 feet	Vertical Change	.28"	5 ft	5	REF		
82635	258.8 to 259.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
82636	261.3 to 262.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	$900
82644	265.4 to 285.3 feet	Key Note Segment		5 ft	100			
82613	266.4 to 267.4 feet	Vertical Change	.26"	5 ft	5	REF		
82637	288.3 to 300.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,320
82638	302.8 to 306.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100

TOTAL COST FOR: S *side of* **SUMMER LN** *Starting at:* **DOUBLE TREE WAY** **$67,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151557	SUMMER LN	KENT DR	WESTBERRY BVD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84278	0.8 to 6.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
84279	6.6 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
84262	11.2 to 12.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
84280	11.7 to 16.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
84281	16.6 to 17.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
84282	18.5 to 20.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,140**
84283	20.4 to 23.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
84326	23.2 to 43.8 feet	Key Note Segment		5 ft	103			
84284	43.9 to 44.9 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	5	SF	$40	**$200**
84285	44.9 to 50.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
84286	51.6 to 52.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
84287	52.9 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
84263	58.2 to 59.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
84288	58.8 to 60.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
84289	65.4 to 67.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
84290	67.3 to 82.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	74	SF	$120	**$8,880**
84327	82.1 to 103.2 feet	Key Note Segment		5 ft	106			
84264	84.1 to 85.1 feet	**Vertical Change**	1.21"	5 ft	5	REF		
84265	94.3 to 95.3 feet	**Vertical Change**	2.79"	5 ft	5	REF		
84291	104.3 to 106.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
84328	108.4 to 130.1 feet	Key Note Segment		5 ft	109			
84292	130.9 to 135.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
84293	135.8 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
84294	140.3 to 152.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,380**
84295	152.8 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
84296	158.5 to 163.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
84329	165.9 to 195.4 feet	Key Note Segment		5 ft	148			
84266	194.7 to 195.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151557	SUMMER LN	KENT DR	WESTBERRY BVD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84297	197.3 to 198.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
84298	199.8 to 202.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
84299	205.0 to 206.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
84300	208.8 to 210.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84301	210.7 to 212.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
84302	218.8 to 227.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
84303	229.8 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
84267	233.1 to 234.1 feet	**Vertical Change**	.54"	5 ft	5	REF		
84304	237.1 to 244.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
84305	245.2 to 248.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
84306	251.6 to 258.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
84330	258.1 to 279.3 feet	Key Note Segment		5 ft	106			
84268	259.2 to 260.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
84269	269.0 to 270.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
84307	282.3 to 284.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
84331	285.3 to 306.3 feet	Key Note Segment		5 ft	105			
84270	293.7 to 294.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
84308	306.9 to 311.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
84309	314.4 to 326.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
84310	331.9 to 338.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
84271	332.3 to 333.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
84311	338.5 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
84312	343.7 to 344.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
84313	346.3 to 347.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
84314	348.3 to 356.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
84315	359.4 to 361.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
84316	363.4 to 370.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
84332	370.3 to 391.0 feet	Key Note Segment		5 ft	104			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151557	SUMMER LN	KENT DR	WESTBERRY BVD	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84272	371.4 to 372.4 feet	Vertical Change	.26"	5 ft	5	REF		
84317	394.3 to 396.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
84333	398.7 to 419.5 feet	Key Note Segment		5 ft	104			
84318	420.7 to 421.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$660
84319	424.3 to 429.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,880
84320	430.3 to 434.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
84321	434.3 to 444.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	$6,060
84273	444.1 to 445.1 feet	Vertical Change	-.36"	5 ft	5	REF		
84322	452.3 to 454.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
84334	456.1 to 477.0 feet	Key Note Segment		5 ft	105			
84274	466.4 to 467.4 feet	Vertical Change	-.35"	5 ft	5	REF		
84323	478.7 to 490.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	$6,960
84275	489.7 to 490.7 feet	Vertical Change	.32"	5 ft	5	REF		
84324	494.5 to 502.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	$4,620
84276	502.9 to 503.9 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
84335	503.8 to 505.1 feet		5.0-6.0%	5 ft	7			
84325	504.7 to 506.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
84277	506.9 to 507.9 feet	Vertical Change	.38"	5 ft	5	LF	$75	$375

TOTAL COST FOR: S *side of* **SUMMER LN** *Starting at:* **KENT DR** **$129,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151346	SUMMER LN	TIMBERLINE DR	DOUBLE TREE WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82710	2.1 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
82711	11.6 to 13.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
82712	16.5 to 18.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
82736	19.3 to 40.3 feet	Key Note Segment		5 ft	105			
82713	41.7 to 42.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82737	45.2 to 65.2 feet	Key Note Segment		5 ft	100			
82714	66.6 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
82715	74.3 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
82716	84.1 to 120.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	180	SF	$120	**$21,540**
82738	122.8 to 142.7 feet	Key Note Segment		5 ft	99			
82695	123.4 to 124.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
82696	132.1 to 133.1 feet	**Vertical Change**	-.4"	5 ft	5	REF		
82739	148.3 to 168.0 feet	Key Note Segment		5 ft	98			
82717	168.9 to 174.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
82718	177.9 to 186.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
82719	188.3 to 194.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
82720	194.8 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
82721	205.8 to 225.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,760**
82697	219.4 to 220.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
82740	226.2 to 245.9 feet	Key Note Segment		5 ft	99			
82698	245.9 to 246.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
82722	247.6 to 251.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
82741	252.2 to 271.9 feet	Key Note Segment		5 ft	98			
82723	279.0 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
82724	288.3 to 302.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
82725	303.2 to 324.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
82700	323.5 to 324.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
82726	327.3 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151346	SUMMER LN	TIMBERLINE DR	DOUBLE TREE WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82727	332.3 to 335.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
82742	335.6 to 365.0 feet	Key Note Segment		5 ft	147			
82701	349.5 to 350.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
82728	365.9 to 373.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
82729	374.6 to 377.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
82730	381.8 to 410.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,100**
82702	395.1 to 396.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
82703	398.6 to 399.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
82704	405.2 to 406.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
82705	407.1 to 408.1 feet	**Vertical Change**	.68"	5 ft	5	REF		
82706	410.8 to 411.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
82731	412.8 to 419.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	**$3,900**
82707	413.4 to 414.4 feet	**Vertical Change**	1.06"	5 ft	5	REF		
82708	416.2 to 417.2 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
82709	419.0 to 420.0 feet	**Vertical Change**	3.53"	5 ft	5	REF		
82732	423.6 to 427.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
82733	429.4 to 432.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
82734	433.3 to 437.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
82735	437.1 to 442.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: S *side of* **SUMMER LN** *Starting at:* **TIMBERLINE DR** **$139,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151601	SUMMER LN	WESTBERRY BVD	KENT DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84349	0.0 to 4.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
84350	4.8 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84351	11.0 to 18.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,740**
84352	18.9 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
84353	26.7 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
84383	28.5 to 49.6 feet	Key Note Segment		5 ft	106			
84354	50.5 to 53.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
84384	54.2 to 83.8 feet	Key Note Segment		5 ft	148			
84336	83.4 to 84.4 feet	**Vertical Change**	.88"	5 ft	5	REF		
84355	87.3 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
84356	112.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
84357	117.3 to 121.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
84358	126.3 to 127.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84359	134.3 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84385	142.8 to 163.8 feet	Key Note Segment		5 ft	105			
84360	165.2 to 168.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
84386	168.7 to 198.2 feet	Key Note Segment		5 ft	148			
84337	170.1 to 171.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
84338	184.0 to 185.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
84361	199.8 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
84362	204.3 to 208.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
84339	209.5 to 210.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
84363	215.7 to 217.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
84364	221.5 to 227.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
84365	230.5 to 234.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
84340	234.0 to 235.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
84366	241.3 to 250.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
84367	254.8 to 257.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151601	SUMMER LN	WESTBERRY BVD	KENT DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84387	258.9 to 279.9 feet	Key Note Segment		5 ft	105			
84368	283.6 to 285.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
84388	285.4 to 314.3 feet	Key Note Segment		5 ft	145			
84369	316.0 to 320.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
84370	324.3 to 325.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84371	327.9 to 333.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
84372	335.6 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
84373	340.3 to 341.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
84374	342.1 to 374.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**
84341	362.3 to 363.3 feet	**Vertical Change**	.64"	5 ft	5	REF		
84389	375.2 to 395.8 feet	Key Note Segment		5 ft	103			
84342	385.5 to 386.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
84343	395.3 to 396.3 feet	**Vertical Change**	-.46"	5 ft	5	REF		
84375	396.7 to 399.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
84390	401.1 to 431.2 feet	Key Note Segment		5 ft	151			
84344	402.1 to 403.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
84345	426.6 to 427.6 feet	**Vertical Change**	-.38"	5 ft	5	REF		
84376	432.2 to 435.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
84377	435.6 to 438.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
84378	438.7 to 448.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
84346	450.8 to 451.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
84379	454.1 to 455.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84380	456.6 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
84391	461.7 to 485.5 feet	Key Note Segment		5 ft	119			
84381	489.3 to 495.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
84382	498.1 to 506.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
84348	499.0 to 500.0 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUMMER LN** *Starting at:* **WESTBERRY BVD** **$101,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170832	SUMMER SET LN	DOUBLE TREE WAY	TRABON WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71377	0.0 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
71371	5.1 to 6.1 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
71372	8.5 to 9.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
71387	11.4 to 30.0 feet	Key Note Segment		5 ft	93			
71378	32.2 to 41.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
71379	43.6 to 57.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
71380	64.2 to 65.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
71381	65.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
71388	84.3 to 102.3 feet	Key Note Segment		5 ft	90			
71373	88.6 to 89.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
71374	93.9 to 94.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
71375	101.6 to 102.6 feet	**Vertical Change**	-.34"	5 ft	5	REF		
71382	103.3 to 115.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
71376	109.9 to 110.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
71383	117.3 to 132.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,060**
71384	134.7 to 138.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
71385	143.2 to 146.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
71386	149.3 to 172.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,680**

TOTAL COST FOR: E *side of* **SUMMER SET LN** *Starting at:* **DOUBLE TREE WAY** **$62,430.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170841	SUMMER SET LN	RIVERVIEW DR	LIBERTY LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71421	0.2 to 2.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**
71422	5.2 to 8.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
71423	8.4 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71466	17.3 to 44.3 feet	Key Note Segment		5 ft	135			
71405	36.8 to 37.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
71467	51.3 to 62.8 feet	Key Note Segment		5 ft	58			
71406	51.6 to 52.6 feet	**Vertical Change**	-.84"	5 ft	5	REF		
71424	67.1 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
71425	70.9 to 74.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
71426	74.9 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
71427	89.2 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
71428	100.8 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
71429	109.6 to 114.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
71468	114.8 to 136.3 feet	Key Note Segment		5 ft	108			
71430	139.1 to 145.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
71431	147.4 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
71469	167.8 to 200.8 feet	Key Note Segment		5 ft	165			
71432	203.3 to 208.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
71433	208.4 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71434	215.2 to 241.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
71435	243.5 to 250.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
71470	251.3 to 278.4 feet	Key Note Segment		5 ft	135			
71436	281.3 to 284.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
71437	284.3 to 303.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
71438	305.2 to 318.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
71471	318.3 to 349.5 feet	Key Note Segment		5 ft	156			
71439	351.2 to 352.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
71440	354.1 to 358.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170841	SUMMER SET LN	RIVERVIEW DR	LIBERTY LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71472	360.9 to 385.3 feet	Key Note Segment		5 ft	122			
71441	385.3 to 386.3 feet	Cross Slope (Driveway)	8.0-9.0%	5 ft	5	SF	$40	$200
71442	387.4 to 414.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	$16,380
71443	417.9 to 419.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
71473	419.6 to 449.0 feet	Key Note Segment		5 ft	147			
71409	448.6 to 449.6 feet	Vertical Change	.34"	5 ft	5	REF		
71444	451.8 to 470.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,280
71410	452.4 to 453.4 feet	Vertical Change	-.37"	5 ft	5	REF		
71445	471.0 to 483.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	$7,380
71446	484.6 to 493.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
71474	494.3 to 522.2 feet	Key Note Segment		5 ft	140			
71447	524.3 to 527.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
71448	527.8 to 530.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
71449	545.3 to 557.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,500
71475	562.1 to 586.6 feet	Key Note Segment		5 ft	123			
71411	588.0 to 589.0 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
71450	590.8 to 601.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,300
71412	596.1 to 597.1 feet	Vertical Change	.33"	5 ft	5	REF		
71476	602.1 to 631.8 feet	Key Note Segment		5 ft	148			
71413	629.5 to 630.5 feet	Vertical Change	.28"	5 ft	5	REF		
71451	634.3 to 651.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	$10,200
71414	641.1 to 642.1 feet	Vertical Change	.36"	5 ft	5	REF		
71452	655.8 to 663.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
71415	659.6 to 660.6 feet	Vertical Change	-.32"	5 ft	5	REF		
71477	664.3 to 700.1 feet	Key Note Segment		5 ft	179			
71416	683.4 to 684.4 feet	Vertical Change	.26"	5 ft	5	REF		
71453	704.7 to 735.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	$18,300
71478	735.5 to 767.2 feet	Key Note Segment		5 ft	159			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170841	SUMMER SET LN	RIVERVIEW DR	LIBERTY LN	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71417	738.0 to 741.1 feet	Vertical Change	.47"	5 ft	16	REF		
71454	769.6 to 770.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
71455	780.8 to 792.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
71418	783.8 to 784.8 feet	Vertical Change	.34"	5 ft	5	REF		
71456	797.6 to 800.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
71457	803.9 to 813.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
71479	814.9 to 840.9 feet	Key Note Segment		5 ft	130			
71458	843.7 to 854.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
71459	856.9 to 862.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
71460	864.8 to 871.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
71461	872.7 to 878.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
71462	878.0 to 903.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
71480	904.4 to 933.3 feet	Key Note Segment		5 ft	145			
71419	907.4 to 908.4 feet	Vertical Change	.27"	5 ft	5	REF		
71463	935.4 to 948.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
71481	948.3 to 978.4 feet	Key Note Segment		5 ft	151			
71420	965.3 to 966.3 feet	Vertical Change	.35"	5 ft	5	REF		
71464	981.5 to 997.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
71465	1000.3 to 1005.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: W *side of* **SUMMER SET LN** *Starting at:* **RIVERVIEW DR** **$244,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170834	SUMMER SET LN	TRABON WAY	RIVERVIEW DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71392	0.1 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
71393	20.6 to 22.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
71394	25.9 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71395	30.9 to 49.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,220**
71403	50.3 to 87.3 feet	Key Note Segment		5 ft	185			
71396	89.1 to 93.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
71397	98.3 to 107.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
71389	101.7 to 102.7 feet	**Vertical Change**	.41"	5 ft	5	REF		
71404	107.0 to 136.8 feet	Key Note Segment		5 ft	149			
71398	136.8 to 138.1 feet	**Cross Slope (Driveway)**	11.0-12.0%	5 ft	6	SF	$40	**$260**
71399	141.2 to 162.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,660**
71400	164.5 to 178.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
71390	164.6 to 165.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
71401	181.6 to 195.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,100**
71391	189.9 to 190.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
71402	195.6 to 200.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: E *side of* **SUMMER SET LN** *Starting at:* **TRABON WAY** **$63,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109141109	SUNDANCE LN	1826 SUNDANCE LN	W CLEVELAND AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65535	7.6 to 15.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
65546	19.8 to 42.3 feet	Key Note Segment		5 ft	113			
65536	42.5 to 44.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	9	SF	$40	**$360**
65521	43.5 to 44.5 feet	Vertical Change	.29"	5 ft	5	REF		
65522	55.1 to 56.1 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
65537	56.7 to 74.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
65523	73.1 to 74.1 feet	Vertical Change	-.31"	5 ft	5	REF		
65538	84.7 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
65524	91.4 to 92.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
65547	93.2 to 117.0 feet	Key Note Segment		5 ft	119			
65525	111.6 to 112.6 feet	Vertical Change	.27"	5 ft	5	REF		
65526	122.7 to 123.7 feet	Vertical Change	-.47"	5 ft	5	LF	$75	**$375**
65539	126.3 to 127.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
65548	127.5 to 150.5 feet	Key Note Segment		5 ft	115			
65527	145.6 to 148.3 feet	Vertical Change	.48"	5 ft	14	REF		
65540	152.2 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
65528	158.6 to 159.6 feet	Vertical Change	-.27"	5 ft	5	REF		
65541	168.5 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
65551	174.8 to 176.8 feet		6.0-7.0%	5 ft	10			
65529	175.3 to 176.3 feet	Vertical Change	.52"	5 ft	5	SF	$75	**$375**
65530	193.5 to 194.5 feet	Vertical Change	.34"	5 ft	5	LF	$75	**$375**
65549	199.9 to 222.9 feet	Key Note Segment		5 ft	115			
65542	224.2 to 227.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
65531	229.8 to 230.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
65532	239.0 to 240.0 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
65543	240.4 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
65544	243.0 to 244.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
65545	246.7 to 253.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109141109	SUNDANCE LN	1826 SUNDANCE LN	W CLEVELAND AVE	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65550	253.9 to 290.3 feet	Key Note Segment		5 ft	182			
65533	268.3 to 269.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
65534	276.9 to 277.9 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SUNDANCE LN** *Starting at:* **1826 SUNDANCE LN** **$37,365.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141124	SUNDANCE LN	BEECHWOOD WAY	GRAPEWOOD WAY	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65741	0.0 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
65742	3.8 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,300**
65743	39.7 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
65744	53.2 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
65745	68.0 to 71.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
65746	76.3 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
65747	86.2 to 120.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	170	SF	$120	**$20,340**
65738	113.6 to 114.6 feet	**Vertical Change**	.97"	5 ft	5	REF		
65748	120.5 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65749	123.7 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
65739	127.0 to 128.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
65740	138.0 to 139.0 feet	**Vertical Change**	.96"	5 ft	5	REF		
65750	146.9 to 150.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
65751	151.2 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
65752	156.6 to 157.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
65753	160.6 to 162.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
65754	162.4 to 163.4 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **SUNDANCE LN** *Starting at:* **BEECHWOOD WAY** **$79,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109141106	SUNDANCE LN	FOXGLOVE WAY	1838 SUNDANCE LN	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65507	27.8 to 44.5 feet	Key Note Segment		5 ft	84			
65486	45.2 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
65508	57.8 to 70.8 feet	Key Note Segment		5 ft	65			
65457	65.6 to 66.6 feet	**Vertical Change**	.58"	5 ft	5	REF		
65487	86.0 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
65458	88.6 to 89.6 feet	**Vertical Change**	.55"	5 ft	5	REF		
65459	94.1 to 95.1 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
65460	98.0 to 99.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
65488	100.3 to 104.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
65461	102.3 to 103.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
65462	108.7 to 109.7 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
65489	112.8 to 116.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
65463	120.0 to 121.0 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
65464	125.4 to 126.4 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
65509	133.8 to 147.3 feet	Key Note Segment		5 ft	68			
65465	141.3 to 142.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
65490	147.3 to 151.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	20	SF	$40	**$800**
65466	148.1 to 149.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
65491	153.8 to 162.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
65510	163.7 to 220.8 feet	Key Note Segment		5 ft	286			
65467	178.6 to 179.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
65468	197.0 to 198.0 feet	**Vertical Change**	-1.36"	5 ft	5	REF		
65492	220.8 to 236.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	80	SF	$40	**$3,200**
65511	236.8 to 251.5 feet	Key Note Segment		5 ft	74			
65493	251.5 to 267.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	82	SF	$40	**$3,280**
65469	252.8 to 253.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
65470	266.3 to 267.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
65512	267.9 to 282.6 feet	Key Note Segment		5 ft	74			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109141106	SUNDANCE LN	FOXGLOVE WAY	1838 SUNDANCE LN	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65471	269.4 to 270.4 feet	Vertical Change	-.35"	5 ft	5	REF		
65472	283.2 to 284.2 feet	Vertical Change	.45"	5 ft	5	REF		
65494	284.8 to 297.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
65495	300.8 to 318.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
65473	311.3 to 312.3 feet	Vertical Change	.29"	5 ft	5	REF		
65513	341.2 to 364.0 feet	Key Note Segment		5 ft	114			
65474	353.4 to 354.4 feet	Vertical Change	.26"	5 ft	5	REF		
65496	364.8 to 365.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65497	374.8 to 399.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
65514	400.0 to 414.8 feet	Key Note Segment		5 ft	74			
65498	417.1 to 431.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
65515	452.6 to 466.8 feet	Key Note Segment		5 ft	71			
65499	472.9 to 480.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
65500	481.4 to 482.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
65501	484.3 to 497.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
65516	498.8 to 520.9 feet	Key Note Segment		5 ft	111			
65502	521.5 to 529.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
65475	522.3 to 523.3 feet	Vertical Change	-.29"	5 ft	5	REF		
65517	529.9 to 552.4 feet	Key Note Segment		5 ft	113			
65476	542.5 to 543.5 feet	Vertical Change	.28"	5 ft	5	REF		
65503	553.3 to 565.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
65477	553.6 to 554.6 feet	Vertical Change	-.27"	5 ft	5	REF		
65478	564.8 to 565.8 feet	Vertical Change	.58"	5 ft	5	REF		
65504	568.8 to 581.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
65479	569.3 to 570.3 feet	Vertical Change	-.84"	5 ft	5	REF		
65480	572.2 to 573.2 feet	Vertical Change	3.49"	5 ft	5	REF		
65518	582.9 to 605.1 feet	Key Note Segment		5 ft	111			
65505	605.1 to 617.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	62	SF	$40	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109141106	SUNDANCE LN	FOXGLOVE WAY	1838 SUNDANCE LN	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65481	618.4 to 619.4 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
65482	634.4 to 635.4 feet	Vertical Change	.4"	5 ft	5	LF	$75	$375
65519	634.9 to 649.8 feet	Key Note Segment		5 ft	74			
65506	675.2 to 707.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	$19,320
65483	677.8 to 678.8 feet	Vertical Change	.26"	5 ft	5	REF		
65520	708.7 to 732.7 feet	Key Note Segment		5 ft	120			
65484	721.4 to 722.4 feet	Vertical Change	-.28"	5 ft	5	REF		
65485	733.1 to 734.1 feet	Vertical Change	.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **SUNDANCE LN** *Starting at:* **FOXGLOVE WAY** **$126,485.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141125	SUNDANCE LN	GRAPEWOOD WAY	PLUMWOOD WAY	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65759	0.0 to 7.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
65760	11.3 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
65761	19.2 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
65755	31.3 to 32.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
65756	38.7 to 39.7 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
65762	59.8 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
65763	80.3 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
65764	90.2 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
65765	111.7 to 129.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
65757	115.0 to 116.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
65766	129.9 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
65767	135.2 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
65768	151.1 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
65769	159.5 to 165.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
65758	165.6 to 166.6 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
65770	167.2 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
65771	175.3 to 183.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
65772	180.2 to 183.1 feet		5.0-6.0%	5 ft	15			
65773	180.2 to 183.1 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: E *side of* **SUNDANCE LN** *Starting at:* **GRAPEWOOD WAY** **$69,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141122	SUNDANCE LN	MEADOWREST WAY	BEECHWOOD WAY	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65726	1.2 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
65727	8.4 to 12.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
65728	14.8 to 19.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
65729	21.1 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
65725	51.7 to 52.7 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
65730	63.4 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
65731	67.2 to 94.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
65732	97.3 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
65733	121.5 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
65734	129.1 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
65735	161.0 to 164.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
65736	162.8 to 165.3 feet		6.0-7.0%	5 ft	12			
65737	162.8 to 165.3 feet	Running Slope	6.0-7.0%	5 ft	12	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **SUNDANCE LN** *Starting at:* **MEADOWREST WAY** **$58,095.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141127	SUNDANCE LN	PLUMWOOD WAY	FOXGLOVE WAY	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65777	0.8 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
65778	11.4 to 20.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
65779	21.1 to 34.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
65780	34.9 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
65781	62.3 to 64.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
65782	67.0 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
65783	77.3 to 79.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
65784	79.7 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
65785	90.1 to 91.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
65786	93.3 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
65775	93.9 to 94.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
65787	98.7 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
65788	111.3 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
65789	135.8 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
65790	174.4 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
65791	183.4 to 190.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
65792	188.1 to 190.6 feet		5.0-6.0%	5 ft	13			
65793	188.1 to 190.6 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **SUNDANCE LN** *Starting at:* **PLUMWOOD WAY** **$69,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109141111	SUNDANCE LN	W CLEVELAND AVE	MEADOWREST WAY	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65553	0.0 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
65552	5.5 to 6.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
65554	15.5 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
65555	26.1 to 28.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
65556	31.4 to 33.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
65557	33.7 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
65558	42.0 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
65559	63.4 to 74.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,420**

TOTAL COST FOR: E *side of* **SUNDANCE LN** *Starting at:* **W CLEVELAND AVE** **$33,495.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111619	SUNNYDALE ST	2424 SUNNYDALE ST	HEATHERWOOD DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93323	4.6 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
93316	15.2 to 16.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
93324	19.1 to 47.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
93341	47.3 to 61.3 feet	Key Note Segment		5 ft	70			
93325	61.8 to 77.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
93326	77.8 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
93342	78.9 to 97.3 feet	Key Note Segment		5 ft	92			
93317	98.4 to 99.4 feet	**Vertical Change**	-.28"	5 ft	5	REF		
93327	99.3 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
93328	102.2 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
93318	111.3 to 115.3 feet	**Vertical Change**	.48"	5 ft	20	LF	$75	**$1,500**
93329	114.1 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
93319	124.0 to 125.0 feet	**Vertical Change**	1.96"	5 ft	5	SF	$75	**$375**
93330	132.9 to 134.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
93331	136.8 to 152.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,240**
93332	152.8 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
93343	166.3 to 181.3 feet	Key Note Segment		5 ft	75			
93333	181.7 to 184.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
93334	190.4 to 194.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
93335	194.8 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	**$24,300**
93320	227.7 to 228.7 feet	**Vertical Change**	-.34"	5 ft	5	REF		
93336	235.3 to 240.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
93337	240.7 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
93338	246.0 to 254.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
93321	246.2 to 247.2 feet	**Vertical Change**	.8"	5 ft	5	REF		
93322	249.1 to 250.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
93339	260.8 to 262.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
93340	266.0 to 267.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201111619	SUNNYDALE ST	2424 SUNNYDALE ST	HEATHERWOOD DR	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **SUNNYDALE ST**	*Starting at:* **2424 SUNNYDALE ST**					**$91,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111616	SUNNYDALE ST	HEATHERWOOD DR	2425 SUNNYDALE ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93287	0.0 to 5.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
93288	19.3 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
93281	26.5 to 27.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
93289	38.7 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
93309	41.3 to 55.8 feet	Key Note Segment		5 ft	73			
93282	43.0 to 44.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
93290	57.3 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,860**
93291	70.4 to 79.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,580**
93283	77.2 to 78.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93292	81.8 to 106.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
93310	106.3 to 120.1 feet	Key Note Segment		5 ft	69			
93284	107.1 to 108.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
93293	120.5 to 121.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
93294	124.8 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
93295	130.6 to 152.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
93296	152.8 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
93297	157.0 to 158.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
93298	161.5 to 163.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
93311	165.1 to 182.8 feet	Key Note Segment		5 ft	89			
93299	183.9 to 195.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
93312	195.6 to 213.5 feet	Key Note Segment		5 ft	90			
93300	214.5 to 221.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,320**
93285	214.6 to 215.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
93286	226.8 to 227.8 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
93301	228.1 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
93302	238.1 to 242.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
93303	246.9 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
93313	258.5 to 273.3 feet	Key Note Segment		5 ft	74			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201111616	SUNNYDALE ST	HEATHERWOOD DR	2425 SUNNYDALE ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93304	273.3 to 274.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$280
93305	278.2 to 285.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
93306	286.7 to 292.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	$3,600
93307	299.6 to 302.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,980
93308	302.9 to 309.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
93314	306.7 to 310.3 feet		5.0-6.0%	5 ft	18			
93315	306.7 to 310.3 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	$2,160

TOTAL COST FOR: N *side of* **SUNNYDALE ST** *Starting at:* **HEATHERWOOD DR** **$95,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111614	SUNNYDALE ST	NATIONAL AVE	SUNNYDALE ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93280	0.0 to 1.2 feet		5.0-6.0%	5 ft	6			
93251	6.5 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
93252	12.7 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,060**
93253	40.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
93254	51.1 to 52.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
93255	55.6 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
93256	58.8 to 82.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
93257	84.8 to 88.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
93258	88.8 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
93276	101.0 to 118.0 feet	Key Note Segment		5 ft	85			
93259	119.5 to 122.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
93260	123.4 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
93247	129.1 to 130.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
93261	129.2 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
93277	134.0 to 147.8 feet	Key Note Segment		5 ft	69			
93262	156.3 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
93263	165.3 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
93248	184.9 to 185.9 feet	**Vertical Change**	1.48"	5 ft	5	SF	$75	**$375**
93264	188.3 to 192.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
93249	193.0 to 194.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
93265	196.0 to 197.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
93266	197.3 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93267	204.6 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
93268	215.0 to 226.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
93269	226.0 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
93270	230.8 to 236.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
93271	238.8 to 241.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
93272	242.3 to 243.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111614	SUNNYDALE ST	NATIONAL AVE	SUNNYDALE ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93278	244.7 to 259.7 feet	Key Note Segment		5 ft	75			
93273	260.1 to 262.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	9	SF	$40	**$380**
93274	263.7 to 268.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93279	282.1 to 296.1 feet	Key Note Segment		5 ft	70			
93275	296.7 to 303.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
93250	309.6 to 310.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **SUNNYDALE ST** *Starting at:* **NATIONAL AVE** **$95,765.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111621	SUNNYDALE ST	SUNNYDALE ST	NATIONAL AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93348	1.3 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
93349	5.0 to 6.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
93350	7.3 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
93351	14.3 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
93352	17.1 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
93353	23.1 to 24.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
93369	27.1 to 48.8 feet	Key Note Segment		5 ft	109			
93354	51.4 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
93355	58.1 to 61.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
93356	61.8 to 68.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
93370	68.1 to 82.3 feet	Key Note Segment		5 ft	71			
93357	82.7 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,740**
93358	110.6 to 115.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
93359	115.7 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
93360	120.1 to 139.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
93361	140.4 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,580**
93371	159.7 to 178.9 feet	Key Note Segment		5 ft	96			
93345	160.6 to 161.6 feet	**Vertical Change**	.47"	5 ft	5	REF		
93362	180.0 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
93346	187.0 to 188.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
93363	188.8 to 191.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
93347	190.6 to 191.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
93364	192.3 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
93372	196.1 to 218.7 feet	Key Note Segment		5 ft	113			
93365	219.1 to 222.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
93366	225.8 to 229.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
93367	232.2 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
93368	237.0 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111621	SUNNYDALE ST	SUNNYDALE ST	NATIONAL AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93373	245.8 to 247.5 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **SUNNYDALE ST** *Starting at:* **SUNNYDALE ST** **$80,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110939	SUNRISE AVE	ADELAIDE AVE	VINEYARD AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57685	3.1 to 4.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$900**
57686	6.7 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,160**
57687	36.7 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
57688	41.6 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
57689	47.2 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
57690	50.0 to 59.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
57691	59.5 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
57692	63.4 to 92.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,700**
57693	95.6 to 110.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,700**
57694	113.7 to 117.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
57715	118.3 to 143.8 feet	Key Note Segment		5 ft	128			
57679	134.1 to 135.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
57680	144.1 to 145.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
57695	152.9 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
57696	156.3 to 161.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
57697	164.3 to 201.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	187	SF	$120	**$22,380**
57698	204.8 to 214.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
57699	217.0 to 236.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,580**
57700	236.6 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
57701	265.3 to 268.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
57702	268.9 to 281.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
57703	289.6 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,620**
57704	304.8 to 305.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
57705	308.4 to 365.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	286	SF	$120	**$34,320**
57706	368.0 to 377.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
57707	378.4 to 408.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,760**
57708	410.5 to 417.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
57709	423.0 to 431.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110939	SUNRISE AVE	ADELAIDE AVE	VINEYARD AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57716	431.6 to 459.7 feet	Key Note Segment		5 ft	141			
57710	459.7 to 465.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	31	SF	$40	$1,220
57681	460.2 to 461.2 feet	Vertical Change	.86"	5 ft	5	REF		
57682	462.6 to 463.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
57711	470.4 to 526.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	283	SF	$120	$33,900
57683	523.7 to 524.7 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
57712	528.5 to 530.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	$900
57713	534.1 to 536.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	$1,440
57684	536.8 to 537.8 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
57714	538.2 to 542.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	$2,820

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **ADELAIDE AVE** **$243,065.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101153	SUNRISE AVE	APARTMENTS	S LAKE ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50456	0.9 to 23.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,560**
50457	27.1 to 46.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
50458	51.3 to 54.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
50459	57.1 to 86.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	148	SF	$120	**$17,700**
50454	82.1 to 83.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
50460	88.8 to 117.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	145	SF	$120	**$17,340**
50461	118.4 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
50462	130.1 to 138.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
50455	138.4 to 139.4 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **APARTMENTS** **$70,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110929	SUNRISE AVE	DRYSDALE WAY	LILLY ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57621	0.0 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	206	SF	$120	**$24,672**
57622	32.4 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	371	SF	$120	**$44,544**
57623	94.0 to 136.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	342	SF	$120	**$40,992**
57618	107.8 to 108.8 feet	**Vertical Change**	.27"	8 ft	8	REF		
57619	130.0 to 131.0 feet	**Vertical Change**	.33"	8 ft	8	REF		
57624	145.6 to 147.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	12	SF	$120	**$1,440**
57625	161.2 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	85	SF	$120	**$10,176**
57626	173.9 to 178.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	37	SF	$120	**$4,416**
57627	181.4 to 199.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	147	SF	$120	**$17,664**
57628	201.9 to 208.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,432**
57629	217.4 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	219	SF	$120	**$26,304**
57630	245.5 to 261.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	125	SF	$120	**$14,976**
57631	262.5 to 275.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	106	SF	$120	**$12,768**
57632	284.7 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	102	SF	$120	**$12,192**
57620	297.3 to 298.3 feet	**Vertical Change**	.29"	8 ft	8	REF		
57633	301.0 to 315.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	113	SF	$120	**$13,536**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **DRYSDALE WAY** **$230,112.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110953	SUNRISE AVE	HULL AVE	STINSON AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57771	0.7 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
57772	11.3 to 12.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
57773	14.9 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
57784	24.3 to 39.7 feet	Key Note Segment		5 ft	77			
57766	37.2 to 38.2 feet	**Vertical Change**	3.03"	5 ft	5	REF		
57774	39.7 to 56.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	85	SF	$40	**$3,420**
57775	57.3 to 71.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,700**
57776	72.8 to 84.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
57785	84.9 to 121.3 feet	Key Note Segment		5 ft	182			
57768	103.5 to 104.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
57777	123.2 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
57778	127.2 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	241	SF	$120	**$28,920**
57769	129.6 to 130.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
57779	179.7 to 189.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
57786	190.7 to 208.8 feet	Key Note Segment		5 ft	91			
57780	210.1 to 213.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
57781	214.1 to 224.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
57782	227.4 to 233.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
57770	233.4 to 234.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
57783	233.8 to 243.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **HULL AVE** **$85,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111001	SUNRISE AVE	KNOX AVE	LILLY ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57818	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
57807	2.1 to 3.1 feet	**Vertical Change**	-.39"	5 ft	5	REF		
57819	17.1 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
57808	17.8 to 18.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
57820	34.7 to 36.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
57844	36.5 to 44.8 feet	Key Note Segment		5 ft	42			
57809	36.7 to 37.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
57821	44.8 to 50.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,060**
57822	52.9 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
57810	55.2 to 56.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
57845	56.8 to 66.1 feet	Key Note Segment		5 ft	46			
57823	78.4 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
57824	98.2 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,620**
57825	112.5 to 115.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
57826	117.8 to 121.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
57827	123.5 to 125.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
57828	127.3 to 132.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
57829	132.2 to 133.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
57830	135.7 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
57846	145.2 to 154.9 feet	Key Note Segment		5 ft	49			
57831	155.7 to 157.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
57832	161.9 to 164.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
57847	165.2 to 175.6 feet	Key Note Segment		5 ft	52			
57811	181.0 to 182.0 feet	**Vertical Change**	.79"	5 ft	5	SF	$75	**$375**
57848	198.8 to 207.8 feet	Key Note Segment		5 ft	45			
57833	210.3 to 218.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
57834	220.6 to 228.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
57849	253.4 to 261.8 feet	Key Note Segment		5 ft	42			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108111001	SUNRISE AVE	KNOX AVE	LILLY ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57812	254.9 to 255.9 feet	Vertical Change	.87"	5 ft	5	REF		
57835	263.1 to 272.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
57850	273.6 to 283.5 feet	Key Note Segment		5 ft	49			
57836	284.2 to 285.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	**$320**
57837	289.3 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
57813	291.5 to 292.5 feet	Vertical Change	1.21"	5 ft	5	REF		
57838	355.3 to 361.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
57851	362.0 to 372.7 feet	Key Note Segment		5 ft	54			
57852	383.0 to 393.0 feet	Key Note Segment		5 ft	50			
57814	383.9 to 384.9 feet	Vertical Change	-.48"	5 ft	5	REF		
57815	392.5 to 393.5 feet	Vertical Change	.34"	5 ft	5	REF		
57839	411.0 to 428.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
57816	420.2 to 421.2 feet	Vertical Change	1.35"	5 ft	5	REF		
57853	437.3 to 446.3 feet	Key Note Segment		5 ft	45			
57840	446.8 to 453.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
57841	454.1 to 459.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
57842	459.5 to 464.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
57843	464.6 to 481.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
57817	478.8 to 479.8 feet	Vertical Change	.27"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **KNOX AVE** **$91,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110934	SUNRISE AVE	LILLY ST	ADELAIDE AVE	121

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57644	0.8 to 14.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
57634	5.6 to 6.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
57645	16.9 to 19.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
57646	22.6 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
57647	28.7 to 33.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
57648	35.7 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,900**
57649	50.6 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
57650	56.3 to 76.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$11,940**
57651	76.2 to 81.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
57635	81.0 to 82.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
57652	84.3 to 95.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
57653	99.2 to 126.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	134	SF	$120	**$16,080**
57654	127.7 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
57655	136.8 to 148.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$7,020**
57656	148.8 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
57657	161.7 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
57636	166.0 to 167.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
57658	182.8 to 187.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
57659	191.1 to 192.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
57660	195.2 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
57661	205.1 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
57662	209.3 to 215.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
57663	217.4 to 221.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
57664	225.3 to 236.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
57665	239.7 to 248.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
57637	250.8 to 251.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
57666	250.8 to 270.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,700**
57667	275.8 to 288.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110934	SUNRISE AVE	LILLY ST	ADELAIDE AVE	121

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57638	304.6 to 305.6 feet	Vertical Change	-.49"	5 ft	5	LF	$75	$375
57668	306.4 to 307.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	$720
57669	309.5 to 310.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$720
57670	313.6 to 327.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	$8,220
57639	316.2 to 317.2 feet	Vertical Change	-.29"	5 ft	5	REF		
57671	327.9 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
57672	340.8 to 346.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
57640	341.5 to 342.5 feet	Vertical Change	-.41"	5 ft	5	REF		
57673	357.2 to 359.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,440
57674	359.6 to 365.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	$3,240
57675	367.2 to 389.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	$13,500
57676	393.2 to 398.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,420
57677	398.9 to 405.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
57678	407.3 to 448.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	204	SF	$120	$24,480
57642	434.3 to 435.3 feet	Vertical Change	-.26"	5 ft	5	REF		
57643	442.8 to 443.8 feet	Vertical Change	2.92"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **LILLY ST** **$194,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110922	SUNRISE AVE	LILLY ST	TOZER ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57569	0.4 to 1.4 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
57574	3.7 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,300
57575	20.8 to 33.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	$7,380
57576	46.2 to 50.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
57570	53.6 to 54.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
57577	66.1 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880
57578	76.8 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
57598	82.8 to 83.8 feet		5.0-6.0%	5 ft	5			
57597	85.6 to 117.3 feet	Key Note Segment		5 ft	159			
57579	140.9 to 142.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
57580	148.1 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
57581	161.1 to 165.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400
57582	183.0 to 187.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	$2,820
57583	191.8 to 195.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
57584	195.9 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
57572	202.7 to 205.8 feet	Vertical Change	-.31"	5 ft	16	LF	$75	$1,163
57585	205.3 to 206.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
57586	215.3 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	$6,480
57587	240.0 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
57588	250.1 to 252.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
57589	266.4 to 267.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
57590	364.6 to 367.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
57591	372.5 to 375.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
57573	385.4 to 386.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
57592	397.9 to 407.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
57593	419.6 to 423.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
57594	440.8 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
57595	468.6 to 469.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110922	SUNRISE AVE	LILLY ST	TOZER ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57596	474.3 to 477.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **LILLY ST** **$57,187.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101202	SUNRISE AVE	MOORE AVE	S A ST	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50514	3.5 to 6.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	21	SF	$120	**$2,520**
50515	8.7 to 17.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	69	SF	$120	**$8,280**
50516	17.9 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,810**
50517	28.8 to 35.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **MOORE AVE** **$26,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101145	SUNRISE AVE	ROOSEVELT AVE	WALLACE AVE	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50390	0.4 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
50391	6.1 to 25.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
50386	23.7 to 24.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
50392	28.5 to 31.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
50387	40.3 to 41.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
50393	43.7 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
50394	49.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
50388	50.2 to 51.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
50395	52.7 to 56.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
50396	58.2 to 69.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
50397	71.9 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	150	SF	$120	**$18,060**
50398	102.2 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
50407	106.2 to 119.6 feet	Key Note Segment		5 ft	67			
50399	121.3 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
50408	123.3 to 135.4 feet	Key Note Segment		5 ft	61			
50400	135.5 to 147.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$7,020**
50401	147.2 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**
50402	175.4 to 182.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
50403	184.8 to 186.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
50404	189.3 to 201.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
50389	199.8 to 200.8 feet	**Vertical Change**	.57"	5 ft	5	REF		
50405	201.8 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
50406	205.3 to 213.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **ROOSEVELT AVE** **$91,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101206	SUNRISE AVE	S A ST	S B ST	104

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50521	0.0 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,880**
50522	23.2 to 24.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	7	SF	$120	**$780**
50523	27.0 to 28.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
50524	29.8 to 47.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	89	SF	$120	**$10,680**
50518	31.9 to 32.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
50525	50.4 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	147	SF	$120	**$17,640**
50519	63.6 to 64.6 feet	**Vertical Change**	.98"	5 ft	5	REF		
50526	82.2 to 109.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	135	SF	$120	**$16,140**
50527	109.5 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
50520	115.0 to 116.0 feet	**Vertical Change**	.89"	5 ft	5	REF		
50528	124.0 to 140.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	84	SF	$120	**$10,080**
50529	144.2 to 154.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
50540	155.7 to 178.4 feet	Key Note Segment		5 ft	114			
50530	178.4 to 180.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	12	SF	$40	**$480**
50541	181.2 to 205.1 feet	Key Note Segment		5 ft	120			
50531	205.1 to 207.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
50532	207.9 to 220.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
50533	224.3 to 251.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	135	SF	$120	**$16,200**
50534	253.4 to 262.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
50535	265.3 to 309.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	222	SF	$120	**$26,580**
50536	313.3 to 331.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,800**
50537	335.9 to 356.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
50538	359.3 to 378.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
50539	379.8 to 381.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **S A ST** **$168,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101222	SUNRISE AVE	S A ST	S LAKE ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50555	2.1 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
50556	8.3 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
50557	21.0 to 45.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,460**
50577	45.6 to 77.1 feet	Key Note Segment		5 ft	157			
50558	79.5 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
50559	83.2 to 103.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
50560	106.8 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
50561	109.3 to 128.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
50562	131.0 to 134.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
50563	135.1 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
50578	154.3 to 178.6 feet	Key Note Segment		5 ft	121			
50554	155.2 to 156.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
50564	179.8 to 211.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	156	SF	$120	**$18,720**
50565	213.8 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
50579	237.7 to 258.0 feet	Key Note Segment		5 ft	102			
50566	262.1 to 265.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
50567	269.6 to 283.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,280**
50568	284.3 to 290.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
50569	290.4 to 300.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
50570	301.7 to 308.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
50571	308.6 to 310.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
50572	312.4 to 317.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
50573	318.2 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
50574	329.9 to 331.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
50575	334.9 to 340.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
50576	341.7 to 349.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **S A ST** **$135,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101216	SUNRISE AVE	S B ST	501 S B ST	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50543	0.0 to 14.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,460**
50542	6.4 to 7.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
50544	16.5 to 25.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
50545	26.3 to 35.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	47	SF	$120	**$5,640**
50546	40.1 to 42.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	12	SF	$120	**$1,440**
50547	46.2 to 50.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
50552	50.6 to 80.5 feet	Key Note Segment		5 ft	150			
50548	81.4 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
50549	83.8 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
50550	111.3 to 114.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
50551	114.8 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
50553	134.2 to 160.8 feet	Key Note Segment		5 ft	133			

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **S B ST** **$50,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101158	SUNRISE AVE	S LAKE ST	MOORE AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50464	0.0 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	16	SF	$120	**$1,890**
50465	5.4 to 10.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	38	SF	$120	**$4,500**
50466	11.1 to 21.0 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	74	SF	$120	**$8,910**
50467	21.5 to 26.5 feet	Cross Slope (PAR)	8.0-9.0%	8 ft	38	SF	$120	**$4,500**
50468	29.6 to 38.4 feet	Cross Slope (PAR)	7.0-8.0%	8 ft	66	SF	$120	**$7,920**
50469	39.0 to 43.8 feet	Cross Slope (PAR)	9.0-10.0%	8 ft	36	SF	$120	**$4,320**
50494	43.8 to 57.2 feet	Key Note Segment		8 ft	101			
50470	57.3 to 69.3 feet	**Cross Slope (Driveway)**	11.0-12.0%	8 ft	90	SF	$40	**$3,600**
50471	69.3 to 73.1 feet	Cross Slope (PAR)	13.0-14.0%	8 ft	28	SF	$120	**$3,420**
50472	75.9 to 78.8 feet	Cross Slope (PAR)	7.0-8.0%	8 ft	22	SF	$120	**$2,610**
50473	78.8 to 80.0 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	9	SF	$120	**$1,080**
50474	81.1 to 82.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$900**
50475	82.1 to 98.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	125	SF	$120	**$15,030**
50476	105.1 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	63	SF	$120	**$7,560**
50477	132.1 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,160**
50463	134.4 to 135.4 feet	**Vertical Change**	.32"	8 ft	8	REF		
50478	138.9 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	17	SF	$120	**$1,980**
50479	143.4 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	12	SF	$120	**$1,440**
50480	147.6 to 152.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,140**
50495	153.1 to 183.8 feet	Key Note Segment		8 ft	230			
50481	184.5 to 187.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	19	SF	$40	**$750**
50482	192.6 to 202.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,910**
50483	204.6 to 223.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	144	SF	$120	**$17,280**
50484	228.3 to 231.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,610**
50485	235.8 to 249.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	101	SF	$120	**$12,060**
50486	253.2 to 273.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	153	SF	$120	**$18,360**
50487	279.6 to 293.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	106	SF	$120	**$12,690**
50496	293.7 to 325.3 feet	Key Note Segment		8 ft	237			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101158	SUNRISE AVE	S LAKE ST	MOORE AVE	118

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50488	326.8 to 330.0 feet	Cross Slope (PAR)	9.0-10.0%	8 ft	24	SF	$120	**$2,880**
50489	330.0 to 331.3 feet	Cross Slope (PAR)	7.0-8.0%	8 ft	10	SF	$120	**$1,170**
50490	333.7 to 336.0 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	17	SF	$120	**$2,070**
50491	337.7 to 345.1 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	56	SF	$120	**$6,660**
50492	345.5 to 352.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	55	SF	$120	**$6,570**
50493	353.7 to 363.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	73	SF	$120	**$8,730**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **S LAKE ST** **$176,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101224	SUNRISE AVE	S LAKE ST	S LAKE ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50581	1.1 to 11.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
50580	7.4 to 8.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
50582	13.5 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
50583	17.5 to 20.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
50584	20.4 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **S LAKE ST** **$10,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101227	SUNRISE AVE	S LAKE ST	ROOSEVELT AVE	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50588	2.4 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
50589	6.1 to 11.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
50590	14.0 to 19.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
50591	22.1 to 26.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
50592	29.9 to 35.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
50593	35.5 to 54.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,400**
50594	55.2 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
50595	56.8 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
50596	60.3 to 65.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
50597	65.3 to 108.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	218	SF	$120	**$26,100**
50598	110.1 to 113.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
50609	113.0 to 135.4 feet	Key Note Segment		5 ft	112			
50585	124.5 to 125.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
50599	136.5 to 147.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
50610	148.3 to 170.7 feet	Key Note Segment		5 ft	112			
50586	170.6 to 174.6 feet	**Vertical Change**	.26"	5 ft	20	REF		
50600	172.2 to 181.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
50601	184.6 to 186.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
50602	187.2 to 188.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
50603	191.8 to 193.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
50587	194.2 to 195.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
50604	194.6 to 211.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	84	SF	$120	**$10,020**
50605	211.4 to 213.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
50611	223.2 to 237.1 feet	Key Note Segment		5 ft	70			
50606	240.1 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
50607	250.1 to 267.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,680**
50612	267.9 to 278.5 feet	Key Note Segment		5 ft	53			
50613	284.5 to 285.8 feet		5.0-6.0%	5 ft	7			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106101227	SUNRISE AVE	S LAKE ST	ROOSEVELT AVE	106

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50608	284.8 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **S LAKE ST** **$100,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110956	SUNRISE AVE	STINSON AVE	KNOX AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57790	1.3 to 21.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,180**
57787	19.8 to 20.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
57791	24.0 to 32.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
57804	32.4 to 51.0 feet	Key Note Segment		5 ft	93			
57788	33.5 to 34.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
57792	51.0 to 75.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	121	SF	$40	**$4,840**
57793	75.3 to 80.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
57794	80.1 to 84.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,700**
57805	85.0 to 102.9 feet	Key Note Segment		5 ft	90			
57795	105.5 to 108.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
57796	108.6 to 117.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
57797	118.2 to 120.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
57806	120.4 to 137.8 feet	Key Note Segment		5 ft	87			
57798	139.8 to 146.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
57799	149.0 to 172.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$13,980**
57800	176.9 to 179.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
57801	179.2 to 182.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
57802	184.3 to 198.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	70	SF	$120	**$8,400**
57803	198.9 to 200.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **STINSON AVE** **$66,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108110926	SUNRISE AVE	TOZER ST	DRYSDALE WAY	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57606	0.0 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	355	SF	$120	**$42,624**
57599	15.3 to 16.3 feet	**Vertical Change**	.52"	8 ft	8	REF		
57601	31.9 to 32.9 feet	**Vertical Change**	.33"	8 ft	8	REF		
57607	49.2 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,928**
57608	60.0 to 65.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	41	SF	$120	**$4,896**
57609	65.1 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	18	SF	$120	**$2,112**
57610	70.0 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,928**
57602	79.0 to 80.0 feet	**Vertical Change**	-.48"	8 ft	8	REF		
57611	86.5 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	145	SF	$120	**$17,376**
57603	86.6 to 87.6 feet	**Vertical Change**	1.02"	8 ft	8	REF		
57604	108.7 to 109.7 feet	**Vertical Change**	.62"	8 ft	8	REF		
57612	109.0 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	14	SF	$120	**$1,728**
57613	116.7 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	42	SF	$120	**$4,992**
57614	127.8 to 134.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	54	SF	$120	**$6,528**
57605	136.2 to 137.2 feet	**Vertical Change**	.26"	8 ft	8	LF	$75	**$600**
57615	148.3 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
57616	154.3 to 163.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	70	SF	$120	**$8,448**
57617	163.1 to 168.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	40	SF	$120	**$4,800**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **TOZER ST** **$115,224.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101151	SUNRISE AVE	VINEYARD AVE	APARTMENTS	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50412	0.8 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
50413	5.3 to 6.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
50414	11.2 to 17.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
50415	19.7 to 81.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	311	SF	$120	**$37,260**
50416	85.5 to 99.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
50449	100.3 to 115.9 feet	Key Note Segment		5 ft	78			
50417	118.8 to 132.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,340**
50418	135.2 to 139.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
50419	141.2 to 142.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
50420	144.7 to 145.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
50421	147.0 to 148.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
50450	149.9 to 161.8 feet	Key Note Segment		5 ft	60			
50422	161.8 to 169.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	38	SF	$40	**$1,520**
50423	170.0 to 180.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
50424	184.3 to 187.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
50425	187.9 to 189.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
50426	192.3 to 208.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
50427	208.3 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
50451	210.2 to 226.1 feet	Key Note Segment		5 ft	80			
50428	229.3 to 238.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
50429	241.0 to 248.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
50430	250.8 to 270.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	100	SF	$120	**$11,940**
50431	270.8 to 274.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
50432	274.8 to 276.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
50433	276.5 to 280.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
50452	281.3 to 309.6 feet	Key Note Segment		5 ft	142			
50409	290.6 to 291.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
50434	309.8 to 313.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	20	SF	$40	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2106101151	SUNRISE AVE	VINEYARD AVE	APARTMENTS	99

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
50435	315.8 to 324.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
50436	325.6 to 330.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
50437	331.0 to 347.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
50438	347.8 to 350.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
50439	350.8 to 352.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
50453	355.2 to 371.4 feet	Key Note Segment		5 ft	81			
50440	372.8 to 378.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
50441	380.8 to 391.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
50442	392.1 to 396.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
50443	399.9 to 411.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
50410	408.6 to 409.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
50444	411.8 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
50445	420.3 to 425.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
50446	428.3 to 444.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,900**
50447	446.9 to 453.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
50411	452.2 to 453.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
50448	453.6 to 457.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **SUNRISE AVE** *Starting at:* **VINEYARD AVE** **$178,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108110950	SUNRISE AVE	WALLACE AVE	HULL AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57751	0.0 to 17.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
57752	17.0 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
57753	36.8 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
57754	53.6 to 68.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
57755	71.1 to 77.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
57756	79.1 to 88.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
57764	90.1 to 106.1 feet	Key Note Segment		5 ft	80			
57757	106.1 to 110.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$820**
57749	112.3 to 113.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
57758	112.8 to 125.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
57765	126.0 to 141.1 feet	Key Note Segment		5 ft	76			
57759	142.0 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
57760	153.6 to 176.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,560**
57761	176.3 to 187.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,420**
57762	187.7 to 210.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,500**
57750	196.6 to 197.6 feet	**Vertical Change**	3.44"	5 ft	5	REF		
57763	210.7 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: S *side of* **SUNRISE AVE** *Starting at:* **WALLACE AVE** **$98,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191151	SUNSET AVE	300 SUNSET AVE	FOURTH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39159	0.0 to 17.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,200**
39132	4.7 to 5.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
39160	20.2 to 31.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
39161	32.3 to 35.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
39162	36.0 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,980**
39133	38.0 to 39.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
39194	39.8 to 59.9 feet	Key Note Segment		5 ft	101			
39163	60.5 to 61.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
39164	61.8 to 65.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39165	65.8 to 87.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
39166	87.8 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,260**
39167	128.3 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
39135	131.8 to 132.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
39136	149.4 to 150.4 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
39137	152.0 to 153.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
39138	157.8 to 158.8 feet	**Vertical Change**	-1.67"	5 ft	5	SF	$75	**$375**
39168	182.6 to 188.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
39169	198.1 to 265.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	336	SF	$120	**$40,320**
39170	271.6 to 283.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
39171	288.5 to 291.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
39195	293.8 to 303.8 feet	Key Note Segment		5 ft	50			
39172	303.8 to 306.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$620**
39139	309.8 to 310.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
39173	325.4 to 346.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
39140	344.0 to 345.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
39196	347.4 to 359.6 feet	Key Note Segment		5 ft	61			
39141	358.2 to 359.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
39174	359.6 to 361.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191151	SUNSET AVE	300 SUNSET AVE	FOURTH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39175	361.2 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
39176	370.5 to 387.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
39142	384.2 to 385.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
39177	392.3 to 397.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
39178	397.5 to 401.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
39197	401.5 to 431.5 feet	Key Note Segment		5 ft	150			
39179	431.5 to 439.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,540**
39180	442.3 to 469.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
39181	478.0 to 482.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
39182	485.6 to 489.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
39183	497.3 to 516.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,640**
39143	503.7 to 504.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
39144	506.9 to 507.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
39145	510.1 to 513.2 feet	**Vertical Change**	.33"	5 ft	16	REF		
39146	514.3 to 515.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
39184	516.7 to 523.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
39147	517.4 to 524.6 feet	**Vertical Change**	.32"	5 ft	36	REF		
39148	525.4 to 526.4 feet	**Vertical Change**	.64"	5 ft	5	REF		
39185	525.4 to 530.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
39149	527.1 to 528.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
39150	529.4 to 530.4 feet	**Vertical Change**	-.45"	5 ft	5	REF		
39151	531.2 to 532.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
39152	532.8 to 533.8 feet	**Vertical Change**	.91"	5 ft	5	REF		
39186	533.3 to 539.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
39153	534.9 to 537.6 feet	**Vertical Change**	-.29"	5 ft	14	REF		
39154	539.3 to 540.3 feet	**Vertical Change**	1.92"	5 ft	5	SF	$75	**$375**
39155	541.6 to 542.6 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
39187	546.4 to 549.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191151	SUNSET AVE	300 SUNSET AVE	FOURTH ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39156	546.5 to 547.5 feet	Vertical Change	.26"	5 ft	5	REF		
39157	548.5 to 549.5 feet	Vertical Change	2.35"	5 ft	5	REF		
39158	553.5 to 554.5 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
39188	597.3 to 602.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
39189	605.2 to 606.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
39190	607.0 to 610.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
39191	625.8 to 641.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
39192	644.8 to 646.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
39193	647.1 to 654.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **300 SUNSET AVE** **$216,645.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161408	SUNSET AVE	3290 SUNSET AVE	WOODLANDS DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86893	8.3 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
86894	51.5 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
86895	62.0 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
86896	73.2 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
86897	82.6 to 92.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
86898	93.6 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86899	97.0 to 98.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
86900	100.3 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,060**
86901	129.3 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
86902	134.8 to 174.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,520**
86903	182.1 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
86904	203.1 to 228.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
86886	209.7 to 210.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
86905	251.1 to 252.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
86887	251.8 to 252.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
86906	267.5 to 269.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
86907	271.6 to 275.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
86888	277.8 to 278.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
86908	278.8 to 283.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
86909	286.8 to 287.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
86910	289.0 to 290.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86911	298.7 to 300.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
86912	309.3 to 311.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
86913	331.8 to 337.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
86914	340.9 to 344.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
86889	342.9 to 343.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
86915	348.9 to 359.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
86890	356.0 to 357.0 feet	**Vertical Change**	.3"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161408	SUNSET AVE	3290 SUNSET AVE	WOODLANDS DR	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86916	360.8 to 362.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
86917	365.8 to 367.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
86918	368.6 to 369.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86919	380.9 to 393.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
86920	398.3 to 399.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86921	410.8 to 418.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
86891	419.4 to 420.4 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
86922	421.4 to 422.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86923	427.6 to 431.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86924	435.7 to 438.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
86925	440.0 to 441.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86926	447.1 to 450.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
86927	464.3 to 466.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
86928	470.7 to 474.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86929	474.7 to 484.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
86930	484.4 to 487.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
86892	485.2 to 486.2 feet	Vertical Change	-.4"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **3290 SUNSET AVE** **$137,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170934	SUNSET AVE	43 VIA CERIONI	VIA CERIONI	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88123	0.6 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
88118	3.0 to 4.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
88124	3.9 to 9.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
88125	14.4 to 21.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
88126	21.1 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
88127	24.8 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
88128	32.4 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
88119	41.7 to 42.7 feet	**Vertical Change**	.45"	5 ft	5	REF		
88129	42.1 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
88130	44.3 to 60.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
88156	49.4 to 50.6 feet		5.0-6.0%	5 ft	6			
88131	63.8 to 88.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
88120	68.5 to 69.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
88132	89.0 to 91.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
88133	97.4 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
88134	108.8 to 125.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
88121	123.1 to 124.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
88135	126.9 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,880**
88136	166.0 to 172.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
88137	173.7 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88138	177.3 to 184.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
88139	190.4 to 199.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
88140	201.2 to 207.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
88141	209.4 to 228.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,700**
88142	231.1 to 244.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
88143	247.0 to 255.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
88144	257.8 to 262.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
88145	264.9 to 267.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170934	SUNSET AVE	43 VIA CERIONI	VIA CERIONI	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88146	269.2 to 272.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
88147	272.9 to 278.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
88148	278.0 to 285.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
88122	283.9 to 284.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
88149	285.2 to 289.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
88150	289.8 to 307.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
88151	313.3 to 316.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
88152	319.2 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
88153	328.0 to 336.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
88154	336.5 to 363.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
88155	372.5 to 380.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
88157	376.8 to 380.2 feet		5.0-6.0%	5 ft	17			
88158	376.8 to 380.2 feet	Running Slope	5.0-6.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **43 VIA CERIONI** **$182,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251332	SUNSET AVE	ACCORNERO AVE	WILLIAMS AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108397	0.0 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
108398	16.2 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
108393	23.9 to 24.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
108399	48.9 to 66.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
108404	90.4 to 108.7 feet	Key Note Segment		5 ft	92			
108400	119.1 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,220**
108394	136.3 to 137.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
108395	145.9 to 146.9 feet	**Vertical Change**	.51"	5 ft	5	REF		
108401	151.8 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
108402	173.1 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
108396	188.1 to 189.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
108403	199.7 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **ACCORNERO AVE** **$60,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161527	SUNSET AVE	DOUBLE TREE WAY	WESTBERRY BVD	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87771	0.8 to 1.8 feet	Vertical Change	.27"	5 ft	5	REF		
87789	0.9 to 13.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
87790	15.6 to 29.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
87791	30.2 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
87792	35.7 to 41.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
87793	41.3 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
87794	46.3 to 62.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
87795	63.3 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
87796	72.1 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,080**
87797	94.9 to 105.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
87772	106.5 to 107.5 feet	Vertical Change	.36"	5 ft	5	LF	$75	**$375**
87798	110.1 to 111.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	6	SF	$120	**$720**
87799	115.7 to 116.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
87773	119.5 to 120.5 feet	Vertical Change	.28"	5 ft	5	REF		
87800	119.9 to 125.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
87801	125.3 to 129.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
87802	130.7 to 133.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
87803	134.7 to 135.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87804	136.6 to 143.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
87805	145.2 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
87806	156.4 to 157.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
87807	159.5 to 169.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
87774	170.2 to 171.2 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
87808	172.8 to 175.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
87775	184.2 to 185.2 feet	Vertical Change	-.33"	5 ft	5	REF		
87809	184.8 to 185.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87810	186.8 to 187.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87811	190.5 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161527	SUNSET AVE	DOUBLE TREE WAY	WESTBERRY BVD	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87812	215.3 to 223.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
87813	225.2 to 253.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,740**
87814	253.1 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
87815	260.3 to 261.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
87816	266.6 to 286.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,820**
87866	282.8 to 283.8 feet		5.0-6.0%	5 ft	5			
87776	288.3 to 289.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
87817	289.8 to 303.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
87818	306.4 to 308.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
87819	311.4 to 312.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
87820	313.2 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87821	318.3 to 323.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
87822	324.4 to 355.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	158	SF	$120	**$18,900**
87823	358.0 to 362.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
87777	361.6 to 362.6 feet	Vertical Change	.39"	5 ft	5	REF		
87778	366.1 to 367.1 feet	Vertical Change	.28"	5 ft	5	REF		
87824	366.5 to 368.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
87825	371.5 to 383.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
87826	383.0 to 388.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
87827	393.5 to 398.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
87828	398.0 to 405.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	39	SF	$120	**$4,620**
87829	408.3 to 411.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
87830	412.8 to 413.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87831	417.4 to 418.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87832	420.0 to 423.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
87833	424.0 to 432.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
87834	435.9 to 451.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	79	SF	$120	**$9,420**
87835	452.6 to 453.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161527	SUNSET AVE	DOUBLE TREE WAY	WESTBERRY BVD	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87836	454.1 to 457.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
87837	457.3 to 462.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
87838	462.4 to 466.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
87839	470.3 to 471.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
87840	474.8 to 489.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
87841	492.1 to 496.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
87842	496.8 to 504.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
87843	508.1 to 512.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
87844	513.1 to 516.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
87845	518.2 to 519.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87846	523.3 to 524.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87779	523.6 to 524.6 feet	**Vertical Change**	.58"	5 ft	5	REF		
87847	524.8 to 527.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
87848	531.0 to 534.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
87780	535.2 to 536.2 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
87849	538.8 to 540.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
87850	542.0 to 544.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
87851	544.6 to 549.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
87781	545.9 to 546.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
87782	550.3 to 551.3 feet	**Vertical Change**	3.54"	5 ft	5	SF	$75	**$375**
87783	553.5 to 554.5 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
87784	556.3 to 557.3 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
87852	557.5 to 559.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
87785	562.4 to 563.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
87853	563.6 to 564.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
87854	566.7 to 570.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
87855	575.6 to 584.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	45	SF	$120	**$5,400**
87867	586.5 to 587.9 feet		5.0-6.0%	5 ft	7			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161527	SUNSET AVE	DOUBLE TREE WAY	WESTBERRY BVD	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87856	586.6 to 589.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
87857	590.8 to 593.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
87858	594.5 to 598.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,580**
87859	600.7 to 604.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,220**
87860	604.7 to 606.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
87861	609.8 to 611.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87862	617.6 to 618.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87786	619.6 to 620.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
87863	623.6 to 624.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87864	624.8 to 629.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
87787	629.6 to 630.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
87865	630.8 to 632.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
87788	633.0 to 634.0 feet	**Vertical Change**	-.91"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **DOUBLE TREE WAY** **$268,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251402	SUNSET AVE	EL RANCHO DR	N SCHNOOR AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108567	0.3 to 3.6 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	43	SF	$120	**$5,148**
108563	4.0 to 5.0 feet	**Vertical Change**	.32"	13 ft	13	LF	$75	**$975**
108568	5.4 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	394	SF	$120	**$47,268**
108569	37.8 to 48.1 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	134	SF	$120	**$16,068**
108570	49.2 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	172	SF	$120	**$20,592**
108571	62.4 to 73.8 feet	Cross Slope (PAR)	4.0-5.0%	13 ft	148	SF	$120	**$17,784**
108572	80.7 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	759	SF	$120	**$91,104**
108564	137.9 to 141.9 feet	**Vertical Change**	.37"	13 ft	52	REF		
108573	142.3 to 144.7 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	31	SF	$120	**$3,744**
108574	147.5 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	16	SF	$120	**$1,872**
108575	151.3 to 169.3 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	234	SF	$120	**$28,080**
108576	171.0 to 192.0 feet	Cross Slope (PAR)	4.0-5.0%	13 ft	273	SF	$120	**$32,760**
108577	194.9 to 195.9 feet	Cross Slope (PAR)	5.0-6.0%	13 ft	13	SF	$120	**$1,560**
108578	196.8 to 218.0 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	276	SF	$120	**$33,072**
108565	212.2 to 213.2 feet	**Vertical Change**	3.21"	13 ft	13	REF		
108579	220.1 to 222.1 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	26	SF	$120	**$3,120**
108580	232.3 to 252.1 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	257	SF	$120	**$30,888**
108566	251.2 to 252.2 feet	**Vertical Change**	2.09"	13 ft	13	REF		
108581	255.0 to 274.2 feet	Cross Slope (PAR)	3.0-4.0%	13 ft	250	SF	$120	**$29,952**
108582	275.8 to 317.0 feet	Cross Slope (PAR)	2.0-3.0%	13 ft	536	SF	$120	**$64,272**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **EL RANCHO DR** **$428,259.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191128	SUNSET AVE	FAIRVIEW AVE	ROTAN AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39063	2.0 to 3.0 feet	Vertical Change	.58"	5 ft	5	SF	$75	**$375**
39064	7.4 to 16.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
39065	54.8 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
39066	70.9 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
39067	100.8 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
39075	114.3 to 135.7 feet	Key Note Segment		5 ft	107			
39068	137.6 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39069	149.8 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
39070	164.5 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
39076	171.8 to 191.7 feet	Key Note Segment		5 ft	100			
39071	196.8 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
39072	208.6 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
39073	228.6 to 230.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
39074	238.7 to 245.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **FAIRVIEW AVE** **$42,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191114	SUNSET AVE	FOSTER AVE	PINE ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38978	0.0 to 5.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
38979	7.2 to 29.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,560**
38982	30.8 to 45.2 feet	Key Note Segment		5 ft	72			
38976	44.3 to 45.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
38980	46.2 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	156	SF	$120	**$18,660**
38981	80.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
38983	105.8 to 120.6 feet	Key Note Segment		5 ft	74			
38977	106.6 to 107.6 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **FOSTER AVE** **$50,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191103	SUNSET AVE	FOURTH ST	PARK LN	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38876	8.6 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
38877	27.2 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
38860	35.8 to 36.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
38878	36.5 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38879	40.6 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
38880	82.0 to 86.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38881	122.3 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
38882	152.3 to 155.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
38883	158.8 to 168.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
38922	169.4 to 187.0 feet	Key Note Segment		5 ft	88			
38861	187.0 to 188.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
38884	187.8 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38885	191.8 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
38886	201.0 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
38887	242.6 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
38888	250.4 to 253.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
38862	250.5 to 251.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
38863	254.8 to 255.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
38889	264.1 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
38890	267.4 to 270.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
38864	271.0 to 272.0 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
38891	274.4 to 275.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
38892	275.7 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38893	279.6 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38865	282.2 to 283.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
38866	285.7 to 286.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
38867	306.7 to 307.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
38894	323.0 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191103	SUNSET AVE	FOURTH ST	PARK LN	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38895	340.4 to 343.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
38896	346.3 to 347.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38868	367.4 to 368.4 feet	**Vertical Change**	-.48"	5 ft	5	LF	$75	**$375**
38897	373.4 to 376.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
38898	376.9 to 378.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38899	383.2 to 384.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
38900	390.8 to 395.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
38901	395.9 to 397.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38902	415.8 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
38903	423.2 to 434.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
38869	428.2 to 429.2 feet	**Vertical Change**	.44"	5 ft	5	REF		
38904	436.3 to 443.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
38905	449.2 to 452.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
38906	466.7 to 475.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
38907	482.6 to 485.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
38870	496.3 to 497.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
38871	499.6 to 500.6 feet	**Vertical Change**	-1.76"	5 ft	5	SF	$75	**$375**
38872	505.0 to 506.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
38908	552.1 to 556.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
38909	580.2 to 581.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38923	581.8 to 598.9 feet	Key Note Segment		5 ft	86			
38873	600.7 to 601.7 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
38874	608.6 to 609.6 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
38910	610.3 to 644.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
38911	669.2 to 672.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
38912	676.6 to 689.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
38913	693.3 to 697.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
38914	704.8 to 718.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191103	SUNSET AVE	FOURTH ST	PARK LN	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38875	710.0 to 711.0 feet	Vertical Change	1.31"	5 ft	5	REF		
38915	726.8 to 744.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
38924	740.5 to 741.5 feet	Continuous Width	25"	5 ft	5	SF	$120	**$600**
38916	746.7 to 748.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
38917	749.8 to 755.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
38918	774.8 to 778.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
38919	798.8 to 801.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
38920	828.5 to 832.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
38921	875.2 to 879.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **FOURTH ST** **$161,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87641	1.3 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
87642	8.3 to 10.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
87643	13.8 to 14.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
87644	16.1 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
87645	18.7 to 20.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
87612	20.6 to 21.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
87646	26.3 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87647	46.2 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
87648	51.8 to 52.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87649	55.2 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
87613	60.8 to 61.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
87650	78.3 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
87651	91.3 to 92.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87652	96.3 to 97.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87653	101.9 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
87614	102.7 to 103.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
87654	114.0 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87655	117.8 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
87656	144.4 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
87657	149.9 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87658	153.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
87659	167.8 to 170.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
87660	177.4 to 180.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
87661	185.4 to 187.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
87662	194.6 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
87663	206.3 to 209.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
87615	223.0 to 224.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
87664	228.3 to 229.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87665	237.2 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
87666	244.1 to 245.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
87667	248.8 to 258.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
87668	269.1 to 272.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
87669	273.3 to 279.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
87616	284.6 to 285.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
87670	288.3 to 291.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
87671	294.9 to 299.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87672	301.8 to 305.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
87617	302.5 to 303.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
87673	307.9 to 339.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,020**
87618	319.6 to 320.6 feet	**Vertical Change**	.54"	5 ft	5	REF		
87674	344.4 to 353.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
87619	345.5 to 346.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
87675	358.3 to 361.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
87767	366.9 to 399.3 feet	Key Note Segment		5 ft	162			
87676	399.5 to 400.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87677	400.9 to 404.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87678	408.7 to 419.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
87679	421.6 to 426.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
87680	428.8 to 433.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
87681	437.1 to 441.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
87682	447.1 to 448.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87683	449.3 to 450.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87684	455.8 to 461.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
87685	467.2 to 478.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
87686	481.8 to 482.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87687	482.8 to 488.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87688	491.3 to 492.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87689	497.3 to 498.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87690	506.5 to 508.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
87691	516.6 to 517.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87692	520.3 to 526.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
87621	528.2 to 529.2 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
87693	530.1 to 534.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
87694	536.7 to 542.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
87695	549.0 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
87696	559.1 to 563.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
87697	565.7 to 582.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
87622	569.2 to 570.2 feet	Vertical Change	.44"	5 ft	5	REF		
87698	584.1 to 591.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
87699	592.5 to 597.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
87700	600.8 to 619.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
87701	620.3 to 621.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
87702	623.7 to 625.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87703	625.1 to 629.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
87704	636.4 to 637.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87705	638.1 to 639.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
87706	646.1 to 649.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87707	653.8 to 666.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
87623	657.9 to 658.9 feet	Vertical Change	.34"	5 ft	5	REF		
87708	669.2 to 672.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
87709	673.8 to 675.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87710	681.4 to 682.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87711	687.5 to 690.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
87712	694.3 to 695.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87713	696.3 to 697.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87714	707.5 to 715.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
87715	728.6 to 729.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87716	735.7 to 755.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
87625	744.6 to 745.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87717	758.0 to 760.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
87626	761.9 to 762.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
87718	762.1 to 768.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
87719	785.9 to 788.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
87720	791.3 to 794.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
87721	796.8 to 800.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
87768	801.8 to 832.3 feet	Key Note Segment		5 ft	153			
87627	812.3 to 813.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
87722	835.3 to 838.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
87628	842.6 to 843.6 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
87629	850.1 to 851.1 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
87723	861.0 to 863.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87724	867.9 to 873.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
87630	870.5 to 871.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
87725	874.9 to 876.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
87631	883.2 to 884.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
87632	889.1 to 892.0 feet	**Vertical Change**	3.42"	5 ft	15	SF	$75	**$1,088**
87726	897.3 to 901.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
87727	901.7 to 912.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
87728	913.5 to 914.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87634	935.3 to 936.3 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
87729	945.3 to 951.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
87730	955.3 to 956.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87731	960.4 to 962.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
87732	964.3 to 965.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
87733	965.8 to 969.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
87734	972.0 to 975.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
87735	976.5 to 982.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
87736	984.0 to 988.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
87737	992.5 to 995.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
87769	1001.1 to 1014.1 feet	Key Note Segment		5 ft	65			
87635	1002.7 to 1003.7 feet	**Vertical Change**	-.37"	5 ft	5	REF		
87738	1039.4 to 1051.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
87739	1055.7 to 1057.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,140**
87740	1061.9 to 1066.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
87741	1068.3 to 1070.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
87742	1071.6 to 1076.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
87743	1078.4 to 1079.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
87744	1081.9 to 1103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,780**
87745	1113.1 to 1139.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
87770	1124.2 to 1125.5 feet		5.0-6.0%	5 ft	7			
87636	1126.3 to 1127.3 feet	**Vertical Change**	-.57"	5 ft	5	REF		
87746	1149.7 to 1153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
87747	1157.8 to 1167.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
87748	1167.5 to 1178.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	54	SF	$120	**$6,480**
87749	1179.8 to 1184.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
87750	1185.0 to 1189.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
87751	1191.4 to 1192.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
87637	1200.3 to 1201.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
87752	1204.4 to 1210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
87753	1216.2 to 1219.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161521	SUNSET AVE	GRANADA DR	DOUBLE TREE WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87754	1224.8 to 1227.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
87755	1243.3 to 1244.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
87756	1254.6 to 1260.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
87757	1261.7 to 1272.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
87758	1275.6 to 1276.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87759	1278.1 to 1279.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
87760	1279.2 to 1280.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
87761	1280.6 to 1284.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
87638	1282.5 to 1283.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
87762	1287.9 to 1293.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
87639	1296.0 to 1297.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
87763	1296.0 to 1297.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
87764	1304.9 to 1308.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
87765	1309.1 to 1310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87766	1313.3 to 1315.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
87640	1318.2 to 1319.2 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **GRANADA DR** **$373,402.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121618	SUNSET AVE	GRANADA DR	SUNDANCE LN	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97430	0.0 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
97429	7.9 to 8.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
97431	9.0 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
97432	32.3 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
97433	39.2 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
97441	42.1 to 75.8 feet	Key Note Segment		5 ft	169			
97434	80.2 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
97435	91.8 to 93.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97436	97.3 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
97437	109.1 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
97438	116.8 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
97439	139.1 to 141.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
97440	143.9 to 162.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
97442	160.0 to 162.4 feet		5.0-6.0%	5 ft	12			
97443	160.0 to 162.4 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **GRANADA DR** **$47,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121548	SUNSET AVE	LAUREL ST	LINDEN ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97280	2.4 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
97281	14.3 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
97295	19.1 to 52.2 feet	Key Note Segment		5 ft	165			
97296	56.8 to 85.8 feet	Key Note Segment		5 ft	145			
97282	95.0 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
97276	98.4 to 99.4 feet	**Vertical Change**	2.49"	5 ft	5	SF	$75	**$375**
97283	99.6 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
97284	103.1 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
97285	133.0 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
97277	139.4 to 140.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
97297	140.1 to 167.4 feet	Key Note Segment		5 ft	137			
97298	171.9 to 189.3 feet	Key Note Segment		5 ft	87			
97286	195.9 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
97287	204.6 to 207.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
97288	207.7 to 208.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97299	209.0 to 223.5 feet	Key Note Segment		5 ft	73			
97289	224.1 to 239.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	76	SF	$40	**$3,040**
97300	240.1 to 259.1 feet	Key Note Segment		5 ft	95			
97290	265.8 to 267.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
97291	271.9 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
97301	304.5 to 325.3 feet	Key Note Segment		5 ft	104			
97292	340.4 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
97293	358.5 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
97294	367.3 to 368.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
97278	367.9 to 368.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
97279	388.8 to 389.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **LAUREL ST** **$34,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161225	SUNSET AVE	LIBERTY LN	VIA CERIONI	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86434	0.8 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
86435	14.5 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
86436	21.4 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86437	25.0 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
86438	36.6 to 45.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
86439	45.9 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
86440	56.2 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	236	SF	$120	**$28,320**
86411	67.9 to 68.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
86412	81.9 to 82.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
86413	92.5 to 93.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
86490	93.8 to 95.3 feet		5.0-6.0%	5 ft	8			
86414	100.8 to 101.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
86415	106.9 to 107.9 feet	**Vertical Change**	3.52"	5 ft	5	REF		
86441	107.3 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86442	111.4 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86443	118.0 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
86444	144.3 to 145.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86445	149.6 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
86416	152.6 to 153.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
86446	155.3 to 157.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86447	160.4 to 163.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
86448	163.4 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
86417	169.6 to 170.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
86449	170.3 to 173.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
86450	181.2 to 193.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
86418	184.1 to 185.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
86451	196.6 to 200.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
86419	197.1 to 198.1 feet	**Vertical Change**	-.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161225	SUNSET AVE	LIBERTY LN	VIA CERIONI	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86452	200.8 to 213.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
86453	215.3 to 225.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
86454	227.1 to 230.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
86455	230.4 to 257.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,380**
86456	260.1 to 266.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
86457	267.7 to 268.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86458	271.5 to 274.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
86420	276.4 to 277.4 feet	**Vertical Change**	3.48"	5 ft	5	REF		
86459	277.3 to 281.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
86460	281.3 to 299.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
86421	283.2 to 284.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
86489	299.3 to 317.3 feet	Key Note Segment		5 ft	90			
86422	301.4 to 302.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
86423	308.7 to 309.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
86461	317.3 to 336.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	94	SF	$40	**$3,760**
86424	330.5 to 331.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
86462	337.5 to 359.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
86463	359.7 to 373.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
86464	377.2 to 380.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
86425	379.6 to 380.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
86465	383.8 to 389.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
86466	389.3 to 398.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
86467	402.0 to 404.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
86468	407.7 to 410.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
86469	414.0 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
86470	427.8 to 435.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
86471	435.3 to 437.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
86472	439.9 to 443.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161225	SUNSET AVE	LIBERTY LN	VIA CERIONI	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86473	444.0 to 445.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86474	448.2 to 452.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
86475	454.6 to 458.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86427	459.8 to 460.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
86476	460.7 to 482.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
86428	462.7 to 463.7 feet	**Vertical Change**	3.47"	5 ft	5	REF		
86477	484.9 to 486.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
86478	486.4 to 493.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
86479	497.4 to 501.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
86429	501.1 to 502.1 feet	**Vertical Change**	-1.06"	5 ft	5	REF		
86480	503.8 to 527.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
86430	523.1 to 524.1 feet	**Vertical Change**	-.75"	5 ft	5	SF	$75	**$375**
86481	538.1 to 540.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86482	544.6 to 548.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
86483	548.1 to 574.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**
86431	578.0 to 579.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
86432	585.2 to 586.2 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
86484	591.5 to 600.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,580**
86485	605.1 to 606.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
86486	606.7 to 608.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
86487	612.0 to 624.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
86433	625.0 to 626.0 feet	**Vertical Change**	.51"	5 ft	5	SF	$75	**$375**
86488	632.5 to 640.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
86491	637.8 to 639.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **LIBERTY LN** **$271,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121616	SUNSET AVE	LINDEN ST	N GRANADA DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97410	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
97411	3.6 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
97412	10.5 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
97413	21.5 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
97425	33.1 to 51.2 feet	Key Note Segment		5 ft	91			
97414	63.4 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
97426	70.5 to 88.3 feet	Key Note Segment		5 ft	89			
97415	88.3 to 89.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$320**
97416	89.9 to 98.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
97417	101.0 to 109.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
97418	109.8 to 114.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
97408	110.7 to 111.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
97419	115.5 to 119.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
97420	119.2 to 124.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**
97421	124.5 to 126.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
97422	127.1 to 128.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
97423	129.2 to 143.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
97424	144.2 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,360**
97409	162.6 to 163.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
97427	170.3 to 173.1 feet		5.0-6.0%	5 ft	14			
97428	170.3 to 173.1 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **LINDEN ST** **$53,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121544	SUNSET AVE	MAINBERRY DR	LAUREL ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97252	1.2 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
97253	4.3 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97254	7.5 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
97255	12.5 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
97244	12.7 to 13.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
97256	21.4 to 25.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
97257	29.9 to 39.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
97245	30.3 to 31.3 feet	**Vertical Change**	2.79"	5 ft	5	REF		
97258	41.8 to 62.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,480**
97259	64.8 to 74.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
97260	74.8 to 94.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
97246	76.0 to 77.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
97247	92.1 to 93.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
97261	95.4 to 104.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
97262	106.0 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
97263	111.4 to 116.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
97264	120.6 to 123.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
97265	123.8 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
97266	148.9 to 150.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
97267	151.2 to 179.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	**$17,040**
97248	166.4 to 167.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
97249	175.6 to 176.6 feet	**Vertical Change**	2.97"	5 ft	5	REF		
97268	179.8 to 188.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
97250	180.5 to 181.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
97269	191.3 to 201.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
97251	195.1 to 196.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
97270	205.5 to 207.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
97273	205.5 to 207.2 feet		5.0-6.0%	5 ft	9			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121544	SUNSET AVE	MAINBERRY DR	LAUREL ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97271	210.4 to 212.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
97272	212.3 to 220.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
97274	217.3 to 219.9 feet		7.0-8.0%	5 ft	13			
97275	217.3 to 219.9 feet	Running Slope	7.0-8.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **MAINBERRY DR** **$112,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251304	SUNSET AVE	MAINBERRY DR	SHANNON AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108200	1.3 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
108201	6.2 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
108228	21.8 to 39.1 feet	Key Note Segment		5 ft	87			
108202	42.4 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
108203	49.3 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
108229	64.7 to 82.5 feet	Key Note Segment		5 ft	89			
108204	83.5 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108205	89.2 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
108206	95.9 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
108230	130.5 to 145.5 feet	Key Note Segment		5 ft	75			
108191	147.7 to 148.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
108207	156.4 to 161.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
108208	163.5 to 165.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
108209	166.2 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
108210	179.3 to 183.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
108192	185.2 to 186.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
108193	194.9 to 195.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
108194	203.4 to 204.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
108211	206.7 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
108212	222.5 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
108231	230.6 to 250.8 feet	Key Note Segment		5 ft	101			
108232	259.4 to 276.8 feet	Key Note Segment		5 ft	87			
108195	262.3 to 263.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
108196	265.4 to 266.4 feet	**Vertical Change**	.35"	5 ft	5	REF		
108197	277.7 to 278.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
108213	281.8 to 308.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,140**
108214	315.2 to 317.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
108215	320.3 to 328.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251304	SUNSET AVE	MAINBERRY DR	SHANNON AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108233	328.7 to 345.4 feet	Key Note Segment		5 ft	84			
108216	348.8 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
108217	357.9 to 362.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
108218	366.2 to 388.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
108219	394.3 to 406.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
108220	424.6 to 429.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
108234	431.1 to 453.7 feet	Key Note Segment		5 ft	113			
108221	456.7 to 458.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
108222	463.6 to 466.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
108223	479.1 to 480.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108224	482.9 to 488.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
108235	489.2 to 511.3 feet	Key Note Segment		5 ft	111			
108225	513.3 to 520.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
108198	530.6 to 531.6 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
108199	547.2 to 548.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
108236	556.2 to 575.8 feet	Key Note Segment		5 ft	98			
108226	588.9 to 593.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
108227	598.9 to 608.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **MAINBERRY DR** **$111,465.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191140	SUNSET AVE	N N ST	500 SUNSET AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39103	0.2 to 31.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	158	SF	$120	**$18,960**
39090	29.5 to 30.5 feet	**Vertical Change**	-.37"	5 ft	5	REF		
39104	35.8 to 47.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
39105	47.3 to 49.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
39106	49.9 to 57.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
39107	58.1 to 60.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
39108	60.4 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
39109	86.4 to 102.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
39110	104.6 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
39111	119.1 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
39112	138.9 to 141.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
39113	141.9 to 148.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
39114	152.8 to 186.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	167	SF	$120	**$20,100**
39115	188.7 to 198.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
39091	196.6 to 197.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
39116	199.5 to 201.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,320**
39117	203.6 to 204.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
39118	207.3 to 219.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
39119	221.5 to 250.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,220**
39120	255.8 to 343.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	439	SF	$120	**$52,620**
39092	285.1 to 286.1 feet	**Vertical Change**	.34"	5 ft	5	REF		
39093	302.3 to 303.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
39130	344.0 to 363.8 feet	Key Note Segment		5 ft	99			
39121	364.3 to 379.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	75	SF	$40	**$2,980**
39122	379.7 to 392.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
39123	393.7 to 477.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	420	SF	$120	**$50,400**
39094	410.2 to 411.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
39095	461.6 to 462.6 feet	**Vertical Change**	-.47"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191140	SUNSET AVE	N N ST	500 SUNSET AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39124	478.3 to 499.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,600**
39096	478.8 to 479.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
39125	500.7 to 583.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	415	SF	$120	**$49,860**
39097	513.1 to 514.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
39098	530.4 to 531.4 feet	**Vertical Change**	-.43"	5 ft	5	REF		
39099	547.7 to 548.7 feet	**Vertical Change**	-.49"	5 ft	5	REF		
39100	565.0 to 566.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
39126	585.6 to 590.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	**$2,760**
39127	590.2 to 591.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
39128	594.4 to 597.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
39101	595.4 to 596.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
39129	597.1 to 599.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
39131	599.1 to 621.7 feet	Key Note Segment		5 ft	113			
39102	604.4 to 605.4 feet	**Vertical Change**	.41"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **N N ST** **$317,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251410	SUNSET AVE	N SCHNOOR AVE	SHANNON AVE	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108595	0.3 to 28.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	143	SF	$120	**$17,160**
108596	31.3 to 39.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
108583	39.7 to 40.7 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
108597	42.6 to 56.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
108598	59.1 to 60.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
108599	62.9 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
108584	69.6 to 70.6 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
108600	73.2 to 86.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
108585	80.0 to 81.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
108601	86.9 to 88.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
108602	88.5 to 107.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	97	SF	$120	**$11,580**
108586	105.3 to 106.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
108603	107.8 to 123.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	79	SF	$120	**$9,480**
108587	113.0 to 114.0 feet	**Vertical Change**	1.04"	5 ft	5	REF		
108588	117.6 to 118.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
108604	123.6 to 138.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,700**
108605	140.4 to 220.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	401	SF	$120	**$48,120**
108606	224.0 to 232.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
108607	234.3 to 256.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	109	SF	$120	**$13,080**
108608	256.7 to 271.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	72	SF	$120	**$8,580**
108609	274.4 to 280.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
108610	283.3 to 297.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**
108611	298.2 to 307.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
108612	307.3 to 312.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
108613	315.1 to 321.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
108614	321.9 to 323.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
108615	323.3 to 348.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	128	SF	$120	**$15,300**
108616	351.0 to 360.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251410	SUNSET AVE	N SCHNOOR AVE	SHANNON AVE	102

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108617	360.8 to 373.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
108618	373.2 to 440.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	335	SF	$120	**$40,200**
108619	443.6 to 491.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	239	SF	$120	**$28,620**
108620	493.3 to 502.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	45	SF	$120	**$5,400**
108621	502.4 to 520.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	89	SF	$120	**$10,740**
108622	520.5 to 556.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	178	SF	$120	**$21,300**
108590	549.9 to 550.9 feet	**Vertical Change**	1.67"	5 ft	5	REF		
108623	556.0 to 564.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	44	SF	$120	**$5,280**
108624	564.8 to 566.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
108625	567.6 to 588.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	105	SF	$120	**$12,540**
108591	577.0 to 578.0 feet	**Vertical Change**	3.04"	5 ft	5	REF		
108626	589.9 to 593.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
108593	592.3 to 593.3 feet	**Vertical Change**	.89"	5 ft	5	REF		
108627	594.7 to 599.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108628	603.7 to 619.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
108594	605.4 to 606.4 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **N SCHNOOR AVE** **$341,250.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251315	SUNSET AVE	N SCHNOOR AVE	PAUL AVE	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108284	0.1 to 10.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$5,940**
108285	14.6 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
108286	23.1 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
108287	31.2 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
108272	54.3 to 55.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
108288	54.3 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
108273	63.2 to 64.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
108296	86.9 to 111.5 feet	Key Note Segment		5 ft	123			
108275	144.0 to 145.0 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
108276	157.8 to 158.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
108297	159.8 to 179.5 feet	Key Note Segment		5 ft	98			
108289	208.9 to 214.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
108277	214.3 to 215.3 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
108290	218.2 to 226.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
108298	226.9 to 244.7 feet	Key Note Segment		5 ft	89			
108278	236.7 to 237.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
108291	246.8 to 276.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
108279	277.9 to 278.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
108292	279.7 to 296.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$10,020**
108293	299.1 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
108299	305.3 to 327.0 feet	Key Note Segment		5 ft	109			
108280	315.9 to 316.9 feet	**Vertical Change**	-.69"	5 ft	5	REF		
108281	335.6 to 336.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
108294	338.9 to 342.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
108282	348.4 to 349.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
108295	359.9 to 408.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	244	SF	$120	**$29,220**
108283	400.7 to 401.7 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **N SCHNOOR AVE** **$105,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251357	SUNSET AVE	ORCHARD AVE	EL RANCHO DR	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108529	2.6 to 3.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	$375
108542	12.4 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
108543	29.3 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
108530	38.7 to 39.7 feet	Vertical Change	1.29"	5 ft	5	SF	$75	$375
108544	47.3 to 56.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
108531	47.9 to 48.9 feet	Vertical Change	-.26"	5 ft	5	REF		
108545	56.3 to 77.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	$12,480
108532	75.9 to 76.9 feet	Vertical Change	.29"	5 ft	5	REF		
108562	77.1 to 95.6 feet	Key Note Segment		5 ft	93			
108533	86.5 to 87.5 feet	Vertical Change	-.4"	5 ft	5	REF		
108534	96.7 to 97.7 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
108546	100.2 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	$5,160
108547	108.8 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
108535	109.1 to 110.1 feet	Vertical Change	.37"	5 ft	5	REF		
108548	115.0 to 124.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
108549	126.5 to 138.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$7,020
108550	140.3 to 150.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	$6,360
108551	150.9 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
108536	158.6 to 159.6 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
108537	160.9 to 161.9 feet	Vertical Change	-.84"	5 ft	5	REF		
108552	161.1 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
108553	171.2 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
108554	182.7 to 197.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,120
108538	186.6 to 187.6 feet	Vertical Change	.27"	5 ft	5	REF		
108555	198.2 to 211.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	$8,160
108556	216.3 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
108557	221.1 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
108539	223.3 to 224.3 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251357	SUNSET AVE	ORCHARD AVE	EL RANCHO DR	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108540	229.9 to 230.9 feet	Vertical Change	.5"	5 ft	5	SF	$75	**$375**
108558	241.7 to 249.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
108559	259.7 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,820**
108541	264.0 to 265.0 feet	Vertical Change	.28"	5 ft	5	REF		
108560	291.2 to 302.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
108561	305.9 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **ORCHARD AVE** **$115,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191111	SUNSET AVE	PARK LN	FOSTER AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38935	0.0 to 14.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
38925	5.2 to 6.2 feet	**Vertical Change**	1.12"	5 ft	5	REF		
38926	10.9 to 11.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
38936	15.7 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
38937	20.0 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
38938	33.8 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
38939	43.5 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38940	48.0 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
38941	67.2 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
38965	82.3 to 102.3 feet	Key Note Segment		5 ft	100			
38942	102.3 to 103.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
38943	104.2 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
38966	117.7 to 135.8 feet	Key Note Segment		5 ft	91			
38927	119.4 to 120.4 feet	**Vertical Change**	-.75"	5 ft	5	REF		
38928	134.2 to 135.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
38944	137.8 to 149.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
38929	152.0 to 153.0 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
38945	156.9 to 161.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
38946	164.3 to 174.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
38930	165.0 to 166.0 feet	**Vertical Change**	-.33"	5 ft	5	REF		
38947	180.3 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
38948	202.8 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
38967	211.0 to 230.6 feet	Key Note Segment		5 ft	98			
38968	236.3 to 253.3 feet	Key Note Segment		5 ft	85			
38949	276.1 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
38969	282.8 to 299.2 feet	Key Note Segment		5 ft	82			
38950	299.9 to 301.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
38951	304.2 to 305.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191111	SUNSET AVE	PARK LN	FOSTER AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38970	308.3 to 326.3 feet	Key Note Segment		5 ft	90			
38952	327.6 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
38953	335.9 to 341.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
38931	354.4 to 355.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
38971	367.1 to 384.5 feet	Key Note Segment		5 ft	87			
38932	367.3 to 368.3 feet	**Vertical Change**	-.5"	5 ft	5	REF		
38933	384.5 to 385.5 feet	**Vertical Change**	1.03"	5 ft	5	REF		
38954	386.2 to 387.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
38972	422.3 to 451.8 feet	Key Note Segment		5 ft	148			
38955	454.3 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38956	459.9 to 468.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
38973	468.2 to 496.0 feet	Key Note Segment		5 ft	139			
38957	496.0 to 497.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
38958	497.2 to 500.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
38974	501.3 to 520.6 feet	Key Note Segment		5 ft	97			
38959	521.3 to 530.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	47	SF	$40	**$1,880**
38960	533.7 to 560.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
38961	566.1 to 574.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
38962	578.2 to 580.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
38963	588.5 to 601.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
38934	602.3 to 603.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
38964	604.5 to 610.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **PARK LN** **$130,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251320	SUNSET AVE	PAUL AVE	ACCORNERO AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108316	1.3 to 6.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
108317	7.9 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	139	SF	$120	**$16,740**
108318	39.8 to 44.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
108319	44.8 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
108313	46.1 to 47.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
108320	49.1 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,440**
108314	71.6 to 72.6 feet	**Vertical Change**	.5"	5 ft	5	REF		
108324	82.1 to 104.8 feet	Key Note Segment		5 ft	114			
108321	113.7 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
108322	129.2 to 153.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,460**
108323	182.4 to 193.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
108315	193.2 to 194.2 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **PAUL AVE** **$71,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191121	SUNSET AVE	PINE ST	WILLIS AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39045	14.1 to 52.8 feet	Key Note Segment		5 ft	194			
38984	48.6 to 49.6 feet	Vertical Change	-.31"	5 ft	5	REF		
39009	76.8 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
38986	123.0 to 124.0 feet	Vertical Change	-.3"	5 ft	5	LF	$75	**$375**
39010	125.2 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
38987	142.3 to 143.3 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
39011	146.9 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
39012	168.4 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
39013	181.5 to 185.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
39014	186.9 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
38988	193.9 to 194.9 feet	Vertical Change	-.59"	5 ft	5	SF	$75	**$375**
39015	201.3 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38989	215.4 to 216.4 feet	Vertical Change	-.37"	5 ft	5	LF	$75	**$375**
39016	245.5 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
39017	249.8 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
39018	263.3 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
39019	296.3 to 300.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
38990	301.4 to 302.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
38991	307.6 to 308.6 feet	Vertical Change	-.57"	5 ft	5	SF	$75	**$375**
39020	312.8 to 327.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
39021	339.8 to 353.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
39046	363.5 to 434.6 feet	Key Note Segment		5 ft	356			
38992	445.5 to 446.5 feet	Vertical Change	.32"	5 ft	5	REF		
39022	445.9 to 450.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
39023	458.3 to 474.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
38993	471.9 to 472.9 feet	Vertical Change	3.49"	5 ft	5	REF		
39024	484.5 to 496.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
38994	498.3 to 499.3 feet	Vertical Change	.31"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191121	SUNSET AVE	PINE ST	WILLIS AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38995	506.8 to 507.8 feet	Vertical Change	.37"	5 ft	5	LF	$75	$375
39025	510.0 to 540.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	$18,120
38996	524.0 to 525.0 feet	Vertical Change	.27"	5 ft	5	REF		
39026	540.2 to 552.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,620
38997	549.8 to 550.8 feet	Vertical Change	.29"	5 ft	5	REF		
39027	553.2 to 585.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	$19,380
38998	554.3 to 555.3 feet	Vertical Change	.29"	5 ft	5	REF		
38999	579.7 to 580.7 feet	Vertical Change	-.26"	5 ft	5	REF		
39028	586.3 to 587.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
39029	589.8 to 591.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	$780
39030	592.3 to 594.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	$1,500
39031	604.5 to 608.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
39000	609.6 to 610.6 feet	Vertical Change	.42"	5 ft	5	LF	$75	$375
39032	615.4 to 619.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
39033	621.9 to 637.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	$9,240
39001	635.9 to 636.9 feet	Vertical Change	.34"	5 ft	5	REF		
39034	640.9 to 659.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	$10,980
39035	661.6 to 676.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	$8,760
39003	669.8 to 670.8 feet	Vertical Change	2.98"	5 ft	5	REF		
39004	678.9 to 679.9 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
39036	683.2 to 695.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	$7,260
39037	702.3 to 707.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
39005	704.7 to 705.7 feet	Vertical Change	.31"	5 ft	5	REF		
39038	712.7 to 716.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
39047	721.3 to 732.8 feet	Key Note Segment		5 ft	58			
39039	733.7 to 746.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	$7,860
39006	735.6 to 736.6 feet	Vertical Change	.29"	5 ft	5	REF		
39040	751.8 to 762.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105191121	SUNSET AVE	PINE ST	WILLIS AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39007	753.0 to 754.0 feet	Vertical Change	.3"	5 ft	5	REF		
39008	761.6 to 762.6 feet	Vertical Change	.26"	5 ft	5	REF		
39041	775.3 to 777.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
39042	784.2 to 794.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
39043	804.3 to 810.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
39044	818.3 to 819.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **PINE ST** **$205,170.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191131	SUNSET AVE	ROTAN AVE	PINE ST	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39078	5.2 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
39079	25.9 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
39080	32.9 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
39081	44.3 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
39082	68.5 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
39083	91.5 to 93.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39084	103.8 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39089	115.3 to 137.5 feet	Key Note Segment		5 ft	111			
39085	139.6 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
39086	157.4 to 159.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
39077	224.3 to 225.3 feet	**Vertical Change**	2.15"	5 ft	5	SF	$75	**$375**
39087	235.1 to 236.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
39088	242.8 to 243.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **ROTAN AVE** **$31,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251415	SUNSET AVE	SHANNON AVE	MAINBERRY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108643	0.0 to 28.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	142	SF	$120	**$16,980**
108644	28.7 to 30.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
108645	30.8 to 42.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	58	SF	$120	**$6,900**
108629	36.0 to 37.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
108646	45.5 to 48.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
108630	47.3 to 48.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
108647	48.8 to 75.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	133	SF	$120	**$15,900**
108648	75.7 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
108649	94.1 to 115.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
108631	113.8 to 114.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
108650	115.1 to 121.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**
108651	121.4 to 133.0 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	58	SF	$120	**$6,960**
108632	122.5 to 123.5 feet	**Vertical Change**	.88"	5 ft	5	REF		
108652	133.0 to 134.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
108633	133.2 to 134.2 feet	**Vertical Change**	-.63"	5 ft	5	REF		
108653	136.8 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
108654	146.1 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
108655	149.0 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,320**
108656	187.3 to 190.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
108657	193.0 to 197.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**
108658	197.8 to 199.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
108659	199.1 to 235.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,780**
108660	238.9 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
108634	246.5 to 247.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
108661	262.9 to 265.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108635	263.1 to 264.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
108662	266.7 to 268.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
108663	269.6 to 272.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251415	SUNSET AVE	SHANNON AVE	MAINBERRY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108664	272.4 to 297.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
108636	292.8 to 293.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
108665	300.4 to 302.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
108666	303.3 to 310.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
108667	312.6 to 344.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	160	SF	$120	**$19,260**
108637	330.3 to 331.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
108668	345.1 to 363.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
108669	363.6 to 369.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
108670	374.3 to 379.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
108671	380.5 to 382.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
108672	385.3 to 388.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
108673	391.7 to 399.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
108638	393.1 to 394.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
108674	400.9 to 411.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
108675	414.6 to 427.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,440**
108676	427.0 to 431.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
108677	431.6 to 460.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
108639	459.3 to 460.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
108678	463.7 to 487.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	117	SF	$120	**$13,980**
108679	487.4 to 494.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
108640	498.2 to 499.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
108680	498.4 to 501.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
108681	503.7 to 537.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
108682	537.8 to 542.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
108683	542.3 to 545.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
108684	547.2 to 562.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	**$9,180**
108685	564.2 to 589.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,180**
108641	576.5 to 577.5 feet	**Vertical Change**	.31"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251415	SUNSET AVE	SHANNON AVE	MAINBERRY DR	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108686	589.8 to 607.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
108642	607.2 to 608.2 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **SHANNON AVE** **$327,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251310	SUNSET AVE	SHANNON AVE	N SCHNOOR AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108242	3.4 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
108243	39.8 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
108267	41.4 to 67.2 feet	Key Note Segment		5 ft	129			
108244	69.2 to 84.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
108245	88.4 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
108268	101.7 to 126.6 feet	Key Note Segment		5 ft	125			
108246	128.3 to 141.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,740**
108237	136.5 to 137.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
108247	170.8 to 175.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
108248	178.0 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108249	187.6 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108250	195.3 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
108238	217.3 to 218.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
108251	222.1 to 224.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
108252	230.4 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108253	268.1 to 270.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
108254	291.5 to 294.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
108269	317.0 to 344.3 feet	Key Note Segment		5 ft	137			
108255	346.5 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
108239	364.1 to 365.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
108256	371.8 to 373.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
108270	378.2 to 399.1 feet	Key Note Segment		5 ft	105			
108257	401.5 to 408.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
108258	431.3 to 432.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
108271	470.8 to 489.7 feet	Key Note Segment		5 ft	95			
108259	492.3 to 494.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
108260	508.2 to 510.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
108261	515.4 to 518.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251310	SUNSET AVE	SHANNON AVE	N SCHNOOR AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108262	557.9 to 559.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
108240	563.1 to 564.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
108263	563.5 to 565.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
108264	572.4 to 581.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
108265	590.6 to 613.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
108241	613.7 to 614.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
108266	615.9 to 621.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **SHANNON AVE** **$99,825.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121622	SUNSET AVE	SUNDANCE LN	MAINBERRY DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97450	3.4 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
97451	6.6 to 12.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
97444	14.2 to 15.2 feet	**Vertical Change**	.75"	5 ft	5	SF	$75	**$375**
97452	21.1 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
97453	27.0 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,980**
97454	48.0 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
97495	62.7 to 82.4 feet	Key Note Segment		5 ft	99			
97455	85.5 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
97445	88.4 to 89.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
97504	92.0 to 93.6 feet		5.0-6.0%	5 ft	8			
97456	108.0 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
97457	116.1 to 117.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
97496	123.0 to 141.9 feet	Key Note Segment		5 ft	95			
97446	142.2 to 143.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
97458	142.5 to 147.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$960**
97459	150.3 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
97460	159.1 to 167.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
97461	171.6 to 172.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97462	177.3 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
97497	182.8 to 202.6 feet	Key Note Segment		5 ft	99			
97447	207.1 to 208.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
97463	207.3 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
97464	212.6 to 220.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
97465	226.5 to 227.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97466	238.9 to 241.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
97467	245.9 to 256.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
97468	262.3 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
97498	268.3 to 286.4 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121622	SUNSET AVE	SUNDANCE LN	MAINBERRY DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97448	271.5 to 272.5 feet	Vertical Change	.28"	5 ft	5	REF		
97469	286.4 to 303.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	88	SF	$40	$3,500
97499	305.5 to 326.5 feet	Key Note Segment		5 ft	105			
97470	335.3 to 336.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
97471	348.9 to 353.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
97472	356.2 to 359.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
97473	374.0 to 384.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
97474	388.1 to 389.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
97500	389.4 to 405.8 feet	Key Note Segment		5 ft	82			
97475	405.8 to 407.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$300
97476	407.8 to 414.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
97477	418.7 to 420.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
97501	420.9 to 443.7 feet	Key Note Segment		5 ft	114			
97478	445.1 to 446.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
97449	448.1 to 449.1 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
97479	449.8 to 455.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,360
97480	464.9 to 466.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
97481	471.3 to 472.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
97482	477.4 to 481.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
97502	486.6 to 506.6 feet	Key Note Segment		5 ft	100			
97483	508.5 to 512.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
97484	516.2 to 535.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,700
97503	537.0 to 564.0 feet	Key Note Segment		5 ft	135			
97485	565.3 to 568.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
97486	570.7 to 582.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$7,020
97487	593.7 to 597.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
97488	602.3 to 612.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360
97489	617.8 to 619.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121622	SUNSET AVE	SUNDANCE LN	MAINBERRY DR	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97490	626.8 to 628.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
97491	631.8 to 637.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
97492	643.3 to 649.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
97493	653.5 to 661.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
97494	672.2 to 676.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
97505	677.9 to 680.8 feet		5.0-6.0%	5 ft	15			
97506	677.9 to 680.8 feet	Running Slope	5.0-6.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **SUNDANCE LN** **$146,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170938	SUNSET AVE	VIA CERIONI	CAITLAN DRIVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88167	0.0 to 2.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
88168	2.8 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
88169	12.5 to 19.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
88159	20.0 to 21.0 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
88160	27.5 to 28.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
88170	30.3 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
88161	41.1 to 42.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
88171	41.8 to 49.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
88172	49.8 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
88173	58.0 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
88162	67.2 to 68.2 feet	**Vertical Change**	2.64"	5 ft	5	REF		
88174	69.7 to 73.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
88175	73.9 to 76.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
88163	76.4 to 77.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
88176	76.6 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
88164	80.1 to 81.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
88177	84.8 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
88178	110.2 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
88179	126.6 to 180.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	271	SF	$120	**$32,460**
88165	160.7 to 161.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
88180	192.8 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
88181	197.1 to 199.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
88182	200.7 to 204.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
88183	211.3 to 214.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88184	226.6 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
88185	245.3 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88186	248.5 to 249.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88187	250.6 to 260.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170938	SUNSET AVE	VIA CERIONI	CAITLAN DRIVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88188	265.9 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88189	271.6 to 279.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,620**
88190	279.5 to 290.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	53	SF	$120	**$6,300**
88166	291.7 to 292.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
88191	293.3 to 305.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **VIA CERIONI** **$126,225.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85060	0.0 to 2.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	11	SF	$120	**$1,380**
85061	8.1 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
84984	8.7 to 9.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
85062	16.8 to 28.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
85063	29.2 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
85064	55.0 to 57.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
85065	58.5 to 70.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
85066	76.2 to 78.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
85067	78.8 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
85068	82.5 to 98.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
85069	99.9 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
85070	104.9 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
85071	124.1 to 128.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
85072	130.8 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
85073	137.3 to 138.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
85074	142.1 to 143.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
85075	144.3 to 148.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
85076	151.0 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84985	158.0 to 159.0 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
85077	163.3 to 166.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,100**
85078	170.3 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
84986	172.1 to 173.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
85079	182.9 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
84987	184.8 to 185.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
85080	192.3 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
85081	197.4 to 204.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
85082	209.3 to 210.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85083	215.7 to 219.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85084	222.7 to 224.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
84988	223.3 to 224.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
85085	227.3 to 228.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84989	239.6 to 240.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
85086	244.9 to 248.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
85087	251.3 to 261.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
85088	261.8 to 268.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
85089	270.6 to 271.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
85090	282.5 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
85091	292.8 to 296.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
85092	297.3 to 302.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
85093	306.1 to 309.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
85094	309.7 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
84990	313.7 to 314.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
85095	313.8 to 319.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
84991	318.8 to 319.8 feet	**Vertical Change**	.63"	5 ft	5	REF		
84992	322.6 to 323.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
85096	323.7 to 338.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
85097	341.1 to 344.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
85098	345.9 to 351.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
84993	349.2 to 350.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
85099	356.4 to 359.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
84994	359.8 to 360.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
85100	363.8 to 373.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
84995	364.0 to 365.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
84996	367.7 to 368.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
84997	371.4 to 372.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85101	374.0 to 376.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85102	376.0 to 377.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
84998	376.1 to 387.4 feet	**Vertical Change**	.43"	5 ft	57	REF		
85103	382.2 to 386.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
85104	390.1 to 409.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
84999	392.6 to 393.6 feet	**Vertical Change**	3.31"	5 ft	5	REF		
85000	395.9 to 396.9 feet	**Vertical Change**	3.17"	5 ft	5	REF		
85001	399.8 to 400.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
85002	406.5 to 407.5 feet	**Vertical Change**	3.51"	5 ft	5	REF		
85003	413.4 to 414.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
85105	414.5 to 416.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
85004	415.3 to 416.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
85005	417.6 to 418.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
85106	418.4 to 422.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
85006	419.6 to 420.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
85107	422.8 to 424.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
85007	424.3 to 432.5 feet	**Vertical Change**	.32"	5 ft	41	REF		
85108	426.6 to 430.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
85109	431.0 to 435.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	24	SF	$40	**$940**
85008	433.5 to 434.5 feet	**Vertical Change**	3.48"	5 ft	5	REF		
85110	436.3 to 439.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	18	SF	$40	**$700**
85009	437.3 to 438.3 feet	**Vertical Change**	2.65"	5 ft	5	REF		
85111	441.7 to 442.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
85112	445.0 to 447.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
85113	455.1 to 456.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
85114	460.0 to 481.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
85010	471.9 to 472.9 feet	**Vertical Change**	1.06"	5 ft	5	REF		
85115	486.3 to 493.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
85116	497.5 to 509.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85011	500.2 to 501.2 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
85117	512.0 to 513.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
85118	516.6 to 518.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
85012	518.4 to 519.4 feet	Vertical Change	-.5"	5 ft	5	SF	$75	$375
85119	520.1 to 523.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
85120	524.9 to 530.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
85013	527.3 to 528.3 feet	Vertical Change	-.27"	5 ft	5	REF		
85121	535.2 to 538.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,160
85014	546.8 to 547.8 feet	Vertical Change	3.55"	5 ft	5	SF	$75	$375
85122	547.9 to 548.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
85015	548.7 to 549.7 feet	Vertical Change	.27"	5 ft	5	REF		
85123	554.8 to 555.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$660
85016	555.8 to 556.8 feet	Vertical Change	1.33"	5 ft	5	REF		
85124	558.3 to 561.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
85017	559.3 to 560.3 feet	Vertical Change	.59"	5 ft	5	REF		
85125	562.6 to 569.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
85018	568.5 to 569.5 feet	Vertical Change	.34"	5 ft	5	REF		
85126	569.6 to 581.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,080
85020	577.7 to 578.7 feet	Vertical Change	-.26"	5 ft	5	REF		
85021	580.0 to 582.9 feet	Vertical Change	.37"	5 ft	15	REF		
85127	586.2 to 587.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$660
85022	588.0 to 589.0 feet	Vertical Change	.6"	5 ft	5	SF	$75	$375
85128	590.0 to 591.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
85129	594.0 to 596.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,680
85023	594.1 to 595.1 feet	Vertical Change	.48"	5 ft	5	REF		
85024	598.2 to 599.2 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
85130	603.6 to 607.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,220
85025	605.3 to 606.3 feet	Vertical Change	.48"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85131	608.3 to 609.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
85132	611.7 to 617.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
85026	613.1 to 614.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
85133	617.3 to 618.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
85134	624.8 to 632.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
85027	637.9 to 638.9 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
85135	652.1 to 659.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
85028	657.7 to 658.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
85029	660.0 to 661.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
85136	662.5 to 664.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
85030	663.8 to 667.4 feet	**Vertical Change**	.42"	5 ft	18	REF		
85031	676.0 to 677.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
85137	677.3 to 694.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
85032	679.4 to 680.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
85033	686.0 to 687.0 feet	**Vertical Change**	3.49"	5 ft	5	REF		
85138	694.8 to 701.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
85034	695.4 to 696.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
85035	700.7 to 701.7 feet	**Vertical Change**	3.55"	5 ft	5	REF		
85139	703.8 to 707.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
85140	708.3 to 718.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
85141	722.0 to 732.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
85142	739.0 to 744.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
85143	744.3 to 745.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
85144	755.0 to 759.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
85036	758.8 to 759.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
85145	764.6 to 768.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
85146	776.9 to 779.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
85147	785.3 to 788.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85037	788.3 to 789.3 feet	Vertical Change	.3"	5 ft	5	REF		
85148	788.3 to 792.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
85149	792.1 to 807.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	$9,420
85150	807.8 to 819.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	$7,140
85151	821.8 to 824.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,740
85152	824.7 to 832.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
85040	826.4 to 827.4 feet	Vertical Change	.34"	5 ft	5	REF		
85041	830.0 to 831.0 feet	Vertical Change	3.49"	5 ft	5	REF		
85153	834.6 to 843.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
85154	843.3 to 844.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
85155	851.0 to 856.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,360
85156	860.3 to 862.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,320
85157	862.9 to 864.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
85158	866.4 to 867.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
85042	868.9 to 869.9 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
85043	872.8 to 873.8 feet	Vertical Change	.35"	5 ft	5	REF		
85159	872.8 to 874.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	$720
85160	876.2 to 893.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	88	SF	$120	$10,500
85161	893.7 to 910.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	$9,960
85044	893.9 to 894.9 feet	Vertical Change	3.51"	5 ft	5	REF		
85045	907.6 to 908.6 feet	Vertical Change	3.47"	5 ft	5	REF		
85162	918.2 to 921.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
85046	919.4 to 920.4 feet	Vertical Change	-.3"	5 ft	5	REF		
85163	923.5 to 949.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	$15,840
85164	951.3 to 952.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
85165	956.8 to 984.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	$16,500
85166	987.6 to 989.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
85167	995.3 to 1008.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	$8,100

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85168	1009.3 to 1011.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85169	1015.0 to 1016.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
85170	1016.3 to 1019.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
85171	1019.9 to 1023.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
85172	1028.3 to 1034.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
85173	1039.5 to 1046.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
85174	1049.9 to 1054.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
85175	1056.3 to 1059.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
85047	1060.6 to 1061.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
85176	1061.6 to 1063.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
85048	1064.8 to 1065.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
85177	1065.3 to 1067.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
85178	1072.8 to 1077.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
85179	1081.6 to 1083.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
85049	1081.7 to 1082.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
85050	1084.8 to 1085.8 feet	**Vertical Change**	-.42"	5 ft	5	REF		
85180	1085.5 to 1094.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
85051	1086.5 to 1087.5 feet	**Vertical Change**	.69"	5 ft	5	REF		
85052	1092.9 to 1093.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
85181	1097.0 to 1098.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
85053	1097.7 to 1098.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
85182	1099.6 to 1101.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
85183	1103.5 to 1106.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,860**
85184	1106.6 to 1112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
85054	1107.8 to 1108.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
85055	1109.7 to 1110.7 feet	**Vertical Change**	.84"	5 ft	5	REF		
85056	1115.2 to 1116.2 feet	**Vertical Change**	3.49"	5 ft	5	REF		
85185	1115.4 to 1117.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161026	SUNSET AVE	VIA CERIONI	WESTBERRY BVD	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85186	1119.8 to 1123.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
85057	1131.7 to 1135.7 feet	**Vertical Change**	.39"	5 ft	20	LF	$75	**$1,500**
85187	1133.3 to 1136.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
85188	1138.5 to 1141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
85058	1143.7 to 1144.7 feet	**Vertical Change**	3.49"	5 ft	5	SF	$75	**$375**
85189	1145.8 to 1149.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
85059	1147.2 to 1148.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
85190	1156.6 to 1158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
85191	1163.0 to 1169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
85192	1175.2 to 1191.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,540**
85193	1190.5 to 1193.3 feet		6.0-7.0%	5 ft	14			

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **VIA CERIONI** **$441,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161219	SUNSET AVE	WESTBERRY BVD	LIBERTY LN	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86368	2.3 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
86369	10.3 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
86362	15.4 to 16.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
86370	21.3 to 23.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
86371	25.8 to 50.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
86372	54.6 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86373	61.3 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
86374	67.0 to 70.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
86375	71.1 to 72.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
86376	74.2 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86377	82.3 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86378	89.4 to 90.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86379	92.0 to 95.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
86380	95.1 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86381	106.3 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
86382	117.8 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
86383	125.4 to 127.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
86384	128.6 to 129.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86363	128.7 to 129.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
86385	140.2 to 143.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
86386	146.7 to 162.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
86364	162.0 to 163.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
86387	165.3 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
86388	171.5 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
86389	190.8 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
86390	201.3 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86391	207.6 to 210.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
86392	213.0 to 222.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112161219	SUNSET AVE	WESTBERRY BVD	LIBERTY LN	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86393	224.9 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
86394	233.2 to 243.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
86395	247.8 to 256.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
86396	258.8 to 289.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,300**
86397	291.7 to 309.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
86366	310.3 to 311.3 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
86398	315.3 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
86399	337.6 to 349.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
86400	351.9 to 356.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
86401	356.7 to 397.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	202	SF	$120	**$24,240**
86402	397.3 to 408.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
86403	411.3 to 417.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
86367	419.6 to 420.6 feet	**Vertical Change**	-.48"	5 ft	5	REF		
86404	420.0 to 421.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
86405	423.2 to 426.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
86406	426.2 to 432.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
86407	439.9 to 463.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$13,980**
86408	466.5 to 476.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
86409	480.9 to 492.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **WESTBERRY BVD** **$213,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161404	SUNSET AVE	WESTBERRY BVD	3290 SUNSET AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86877	0.3 to 14.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,460**
86874	14.9 to 15.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
86878	15.3 to 31.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
86879	35.3 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
86880	43.5 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
86881	51.7 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
86885	55.3 to 75.6 feet	Key Note Segment		5 ft	101			
86882	76.0 to 87.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	57	SF	$40	**$2,280**
86875	78.0 to 79.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
86876	86.8 to 87.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
86883	89.0 to 96.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
86884	99.3 to 103.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **WESTBERRY BVD** **$33,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251342	SUNSET AVE	WILLIAMS AVE	ORCHARD AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108450	0.4 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
108451	7.3 to 8.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
108452	10.8 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	321	SF	$120	**$38,460**
108436	19.4 to 20.4 feet	Vertical Change	.31"	5 ft	5	REF		
108437	28.1 to 29.1 feet	Vertical Change	.26"	5 ft	5	REF		
108438	45.3 to 46.3 feet	Vertical Change	.33"	5 ft	5	REF		
108453	84.6 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
108439	100.1 to 101.1 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**
108457	106.3 to 126.1 feet	Key Note Segment		5 ft	99			
108454	129.2 to 161.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	159	SF	$120	**$19,080**
108440	131.2 to 132.2 feet	Vertical Change	.57"	5 ft	5	SF	$75	**$375**
108441	146.6 to 147.6 feet	Vertical Change	1.19"	5 ft	5	REF		
108442	154.4 to 155.4 feet	Vertical Change	1.99"	5 ft	5	REF		
108443	162.0 to 163.0 feet	Vertical Change	2.99"	5 ft	5	SF	$75	**$375**
108444	165.9 to 166.9 feet	Vertical Change	.45"	5 ft	5	LF	$75	**$375**
108445	174.4 to 175.4 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
108455	177.5 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$19,980**
108447	189.0 to 190.0 feet	Vertical Change	.94"	5 ft	5	REF		
108448	202.3 to 203.3 feet	Vertical Change	.3"	5 ft	5	REF		
108458	211.1 to 226.3 feet	Key Note Segment		5 ft	76			
108449	219.4 to 220.4 feet	Vertical Change	.76"	5 ft	5	REF		
108456	226.3 to 227.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	**$220**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **WILLIAMS AVE** **$85,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251335	SUNSET AVE	WILLIAMS AVE	WILLIS AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108406	1.3 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
108407	11.0 to 37.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,960**
108408	37.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,740**
108415	65.7 to 99.4 feet	Key Note Segment		5 ft	169			
108405	66.0 to 67.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
108409	102.0 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
108416	103.6 to 124.4 feet	Key Note Segment		5 ft	104			
108410	131.0 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
108411	139.3 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
108417	151.5 to 170.3 feet	Key Note Segment		5 ft	94			
108412	174.3 to 177.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108413	182.3 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
108414	193.7 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	183	SF	$120	**$21,960**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **WILLIAMS AVE** **$77,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201251339	SUNSET AVE	WILLIS AVE	WILLIAMS AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108423	10.5 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
108434	13.8 to 14.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
108424	15.5 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
108418	20.4 to 21.4 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
108425	40.8 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
108419	54.9 to 55.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
108431	71.2 to 93.3 feet	Key Note Segment		5 ft	111			
108420	82.1 to 83.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
108426	96.2 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
108432	105.5 to 123.1 feet	Key Note Segment		5 ft	88			
108427	132.8 to 135.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
108435	142.7 to 143.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
108421	142.8 to 143.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
108433	155.1 to 175.6 feet	Key Note Segment		5 ft	103			
108428	191.3 to 197.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
108429	201.3 to 202.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
108430	204.6 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
108422	219.4 to 220.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **SUNSET AVE** *Starting at:* **WILLIS AVE** **$20,298.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2105191125	SUNSET AVE	WILLIS AVE	FAIRVIEW AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
39049	30.6 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
39050	44.6 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
39051	61.1 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
39052	78.8 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
39053	91.3 to 99.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
39062	101.2 to 124.4 feet	Key Note Segment		5 ft	116			
39054	125.3 to 137.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,020**
39055	137.6 to 148.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
39056	150.3 to 158.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
39057	160.8 to 186.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
39058	191.1 to 192.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
39059	194.7 to 207.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
39048	196.7 to 197.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
39060	209.2 to 221.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	**$7,260**
39061	221.8 to 222.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **WILLIS AVE** **$74,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161511	SUNSET AVE	WOODLANDS DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87510	1.3 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
87511	6.2 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,320**
87512	31.9 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
87513	43.3 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87514	47.6 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
87479	50.2 to 51.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
87515	64.4 to 71.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
87516	74.3 to 85.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
87517	89.7 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
87518	121.1 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87481	125.4 to 126.4 feet	**Vertical Change**	.61"	5 ft	5	REF		
87519	125.7 to 158.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	164	SF	$120	**$19,620**
87482	163.0 to 164.0 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
87483	176.1 to 177.1 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
87520	187.6 to 194.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
87484	194.6 to 195.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
87521	197.3 to 201.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87522	201.9 to 206.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
87523	206.2 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
87485	213.3 to 214.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
87524	213.4 to 216.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
87525	218.6 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
87526	242.6 to 245.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
87527	254.1 to 256.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
87528	262.7 to 264.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87529	270.4 to 284.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
87530	289.2 to 303.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
87531	305.8 to 307.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161511	SUNSET AVE	WOODLANDS DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87599	326.9 to 344.2 feet	Key Note Segment		5 ft	87			
87532	344.2 to 354.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	50	SF	$40	$1,980
87486	355.8 to 356.8 feet	Vertical Change	.54"	5 ft	5	SF	$75	$375
87533	359.3 to 362.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
87534	365.6 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
87535	370.5 to 371.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
87536	377.0 to 379.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
87600	380.3 to 403.8 feet	Key Note Segment		5 ft	118			
87537	408.6 to 414.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
87601	414.0 to 425.5 feet	Key Note Segment		5 ft	58			
87487	415.5 to 416.5 feet	Vertical Change	-.27"	5 ft	5	REF		
87538	426.9 to 431.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
87539	449.0 to 453.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
87540	457.0 to 497.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	$24,360
87488	465.0 to 466.0 feet	Vertical Change	.26"	5 ft	5	REF		
87489	482.4 to 483.4 feet	Vertical Change	.41"	5 ft	5	REF		
87602	498.8 to 512.2 feet	Key Note Segment		5 ft	67			
87541	512.2 to 519.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	38	SF	$40	$1,520
87542	521.9 to 523.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
87491	525.3 to 526.3 feet	Vertical Change	.43"	5 ft	5	LF	$75	$375
87543	527.1 to 535.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,800
87544	538.1 to 542.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
87545	542.7 to 565.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	$13,560
87603	565.3 to 579.8 feet	Key Note Segment		5 ft	73			
87546	580.8 to 583.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
87547	586.3 to 588.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
87548	590.6 to 615.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	$14,640
87492	600.6 to 601.6 feet	Vertical Change	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161511	SUNSET AVE	WOODLANDS DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87604	617.1 to 632.8 feet	Key Note Segment		5 ft	78			
87493	618.0 to 619.0 feet	Vertical Change	.34"	5 ft	5	REF		
87549	632.8 to 640.5 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	39	SF	$40	$1,540
87494	644.1 to 645.1 feet	Vertical Change	-.45"	5 ft	5	LF	$75	$375
87550	647.2 to 652.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
87495	649.8 to 650.8 feet	Vertical Change	.26"	5 ft	5	REF		
87551	653.6 to 654.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
87552	664.9 to 668.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
87605	679.1 to 700.5 feet	Key Note Segment		5 ft	107			
87553	704.7 to 705.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
87606	711.4 to 726.5 feet	Key Note Segment		5 ft	76			
87554	726.5 to 727.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	6	SF	$40	$220
87496	726.7 to 727.7 feet	Vertical Change	-.56"	5 ft	5	REF		
87555	729.3 to 730.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
87556	743.6 to 749.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
87557	752.2 to 762.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	$6,360
87558	765.0 to 768.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
87559	773.5 to 782.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,280
87560	784.6 to 791.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
87497	789.0 to 790.0 feet	Vertical Change	.32"	5 ft	5	REF		
87561	794.5 to 801.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
87562	808.7 to 813.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
87563	816.1 to 818.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
87564	828.2 to 845.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	$10,320
87499	839.3 to 840.3 feet	Vertical Change	-.26"	5 ft	5	REF		
87565	852.2 to 856.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
87566	860.8 to 863.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
87567	867.0 to 871.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,880

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161511	SUNSET AVE	WOODLANDS DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87568	882.7 to 887.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87500	897.4 to 898.4 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
87569	902.8 to 908.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
87570	912.4 to 914.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
87501	922.7 to 923.7 feet	**Vertical Change**	3.04"	5 ft	5	SF	$75	**$375**
87571	930.2 to 931.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87572	946.6 to 950.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
87573	968.7 to 973.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
87574	982.1 to 986.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
87575	994.0 to 995.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
87576	999.0 to 1002.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
87607	1002.6 to 1023.6 feet	Key Note Segment		5 ft	105			
87502	1006.9 to 1007.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87577	1026.7 to 1031.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
87578	1033.4 to 1035.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
87579	1051.4 to 1053.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
87580	1057.9 to 1062.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
87581	1065.1 to 1068.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
87609	1066.3 to 1068.8 feet		5.0-6.0%	5 ft	13			
87610	1066.3 to 1068.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
87503	1071.9 to 1072.9 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
87582	1085.0 to 1087.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
87583	1092.3 to 1093.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87584	1105.8 to 1108.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
87585	1111.8 to 1117.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
87586	1121.8 to 1125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
87587	1134.3 to 1135.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87588	1135.4 to 1138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161511	SUNSET AVE	WOODLANDS DR	GRANADA DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87589	1143.4 to 1147.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
87611	1144.3 to 1145.3 feet		5.0-6.0%	5 ft	5			
87504	1162.6 to 1163.6 feet	**Vertical Change**	3.46"	5 ft	5	SF	$75	**$375**
87590	1173.8 to 1184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
87505	1179.1 to 1180.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
87591	1189.5 to 1190.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
87592	1191.2 to 1192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87593	1196.0 to 1202.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
87506	1196.3 to 1197.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
87594	1229.0 to 1230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87608	1232.8 to 1251.4 feet	Key Note Segment		5 ft	93			
87508	1250.0 to 1251.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
87595	1258.7 to 1267.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
87509	1263.4 to 1268.8 feet	**Vertical Change**	.43"	5 ft	27	REF		
87596	1272.0 to 1277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
87597	1280.8 to 1282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87598	1289.8 to 1292.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: S *side of* **SUNSET AVE** *Starting at:* **WOODLANDS DR** **$313,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311134	SUSAN LN	120 SUSAN LN	SONORA ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114590	0.3 to 18.8 feet	Key Note Segment		5 ft	93			
114567	18.4 to 19.4 feet	Vertical Change	.31"	5 ft	5	REF		
114574	21.8 to 36.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	$8,640
114575	36.2 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,460
114576	40.3 to 45.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300
114568	46.3 to 47.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
114577	47.5 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
114578	50.0 to 59.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	$5,580
114591	60.0 to 80.6 feet	Key Note Segment		5 ft	103			
114569	60.8 to 61.8 feet	Vertical Change	.87"	5 ft	5	REF		
114570	80.6 to 81.6 feet	Vertical Change	.28"	5 ft	5	REF		
114579	83.9 to 85.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,080
114592	86.4 to 107.0 feet	Key Note Segment		5 ft	103			
114571	86.7 to 87.7 feet	Vertical Change	.34"	5 ft	5	REF		
114580	109.8 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
114581	119.8 to 126.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,260
114582	127.8 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
114583	130.8 to 148.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	$10,440
114572	134.4 to 135.4 feet	Vertical Change	.29"	5 ft	5	REF		
114593	148.2 to 167.6 feet	Key Note Segment		5 ft	97			
114584	169.9 to 173.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,280
114594	174.3 to 194.5 feet	Key Note Segment		5 ft	101			
114573	194.8 to 195.8 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
114585	195.9 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
114586	203.8 to 214.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	$6,540
114595	217.5 to 237.3 feet	Key Note Segment		5 ft	99			
114587	239.3 to 241.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
114588	244.7 to 246.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,260

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311134	SUSAN LN	120 SUSAN LN	SONORA ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114589	250.3 to 256.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,660**

TOTAL COST FOR: S *side of* **SUSAN LN** *Starting at:* **120 SUSAN LN** **$63,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311131	SUSAN LN	132 SUSAN LN	124 SUSAN LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114556	0.0 to 5.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
114564	6.0 to 26.4 feet	Key Note Segment		5 ft	102			
114550	6.5 to 7.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
114551	26.3 to 27.3 feet	**Vertical Change**	-.52"	5 ft	5	REF		
114557	27.7 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
114565	32.8 to 51.8 feet	Key Note Segment		5 ft	95			
114552	36.9 to 37.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
114553	42.7 to 43.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
114558	55.2 to 72.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
114554	65.8 to 66.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
114559	73.9 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
114555	81.1 to 82.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
114560	82.2 to 85.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
114561	86.1 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
114562	89.3 to 92.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
114563	92.4 to 93.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
114566	93.8 to 113.8 feet	Key Note Segment		5 ft	100			

TOTAL COST FOR: S *side of* **SUSAN LN** *Starting at:* **132 SUSAN LN** **$24,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311127	SUSAN LN	SONORA ST	100 ADELL ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114530	0.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
114531	6.3 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114532	54.1 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
114533	82.4 to 102.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
114534	106.9 to 107.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
114535	122.4 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
114536	147.3 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
114537	156.2 to 158.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
114538	166.8 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
114526	178.6 to 179.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
114539	195.7 to 199.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
114540	209.2 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
114527	216.7 to 217.7 feet	**Vertical Change**	-.38"	5 ft	5	REF		
114541	228.7 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
114542	259.5 to 261.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
114543	263.4 to 269.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
114544	283.3 to 292.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
114545	297.6 to 305.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
114546	309.5 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	214	SF	$120	**$25,680**
114528	343.7 to 344.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
114547	353.8 to 370.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
114548	373.9 to 375.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
114549	378.3 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
114529	378.8 to 379.8 feet	**Vertical Change**	.43"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SUSAN LN** *Starting at:* **SONORA ST** **$112,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101554	SYCAMORE AVE	129 SYCAMORE AVE	123 SYCAMORE AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57477	3.2 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
57478	8.3 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
57488	25.1 to 36.9 feet	Key Note Segment		5 ft	59			
57466	32.1 to 33.1 feet	**Vertical Change**	3.28"	5 ft	5	REF		
57479	41.5 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
57480	46.3 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
57489	48.7 to 59.9 feet	Key Note Segment		5 ft	56			
57467	53.5 to 54.5 feet	**Vertical Change**	1.69"	5 ft	5	REF		
57481	64.3 to 79.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
57468	71.1 to 72.1 feet	**Vertical Change**	3.34"	5 ft	5	REF		
57469	75.2 to 76.2 feet	**Vertical Change**	1.64"	5 ft	5	REF		
57470	77.4 to 78.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
57482	81.9 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
57471	84.7 to 85.7 feet	**Vertical Change**	3.09"	5 ft	5	REF		
57483	89.8 to 94.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
57484	94.9 to 123.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
57472	98.3 to 99.3 feet	**Vertical Change**	3.39"	5 ft	5	REF		
57490	123.4 to 136.6 feet	Key Note Segment		5 ft	66			
57473	137.0 to 141.0 feet	**Vertical Change**	.65"	5 ft	20	REF		
57485	137.3 to 145.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	39	SF	$40	**$1,580**
57486	148.5 to 150.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
57474	153.7 to 154.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
57475	160.4 to 161.4 feet	**Vertical Change**	-.81"	5 ft	5	SF	$75	**$375**
57487	161.8 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
57476	162.7 to 163.7 feet	**Vertical Change**	1.08"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **SYCAMORE AVE** *Starting at:* **129 SYCAMORE AVE** **$49,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101556	SYCAMORE AVE	614 SYCAMORE AVE	7TH ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57502	0.9 to 3.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
57503	4.6 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
57491	5.4 to 6.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
57492	13.7 to 14.7 feet	**Vertical Change**	.62"	5 ft	5	REF		
57504	20.8 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
57494	26.2 to 27.2 feet	**Vertical Change**	-.3"	5 ft	5	REF		
57505	45.0 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
57496	77.3 to 78.3 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
57497	86.4 to 87.4 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
57498	88.1 to 90.8 feet	**Vertical Change**	.38"	5 ft	14	LF	$75	**$1,013**
57506	91.3 to 95.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
57499	91.5 to 92.5 feet	**Vertical Change**	-.75"	5 ft	5	REF		
57507	96.8 to 99.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
57501	103.4 to 104.4 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
57508	106.3 to 109.8 feet		6.0-7.0%	5 ft	18			
57509	107.4 to 109.8 feet	Running Slope	7.0-8.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: N *side of* **SYCAMORE AVE** *Starting at:* **614 SYCAMORE AVE** **$20,557.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108101327	SYCAMORE AVE	S LAKE ST	SYCAMORE AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56308	17.2 to 18.2 feet	Vertical Change	-.51"	6 ft	6	SF	$75	**$450**
56310	32.3 to 45.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	80	SF	$120	**$9,576**
56311	48.5 to 50.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,152**
56312	50.1 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
56309	55.2 to 56.2 feet	Vertical Change	.38"	6 ft	6	LF	$75	**$450**

TOTAL COST FOR: N *side of* **SYCAMORE AVE** *Starting at:* **S LAKE ST** **$12,852.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108101331	SYCAMORE AVE	S LAKE ST	CLINTON ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56340	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
56341	7.1 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,584**
56342	21.7 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	82	SF	$120	**$9,792**
56313	30.8 to 31.8 feet	**Vertical Change**	.26"	6 ft	6	REF		
56343	38.3 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	93	SF	$120	**$11,160**
56344	57.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
56345	62.3 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	**$5,832**
56314	63.5 to 64.5 feet	**Vertical Change**	.29"	6 ft	6	REF		
56346	79.1 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	**$2,520**
56315	80.6 to 81.6 feet	**Vertical Change**	-.27"	6 ft	6	REF		
56316	89.2 to 90.2 feet	**Vertical Change**	-.29"	6 ft	6	LF	$75	**$450**
56317	97.7 to 98.7 feet	**Vertical Change**	-.26"	6 ft	6	LF	$75	**$450**
56318	102.1 to 103.1 feet	**Vertical Change**	.43"	6 ft	6	LF	$75	**$450**
56319	110.8 to 111.8 feet	**Vertical Change**	.4"	6 ft	6	LF	$75	**$450**
56347	112.2 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,304**
56320	119.2 to 120.2 feet	**Vertical Change**	.42"	6 ft	6	LF	$75	**$450**
56348	148.4 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
56349	190.7 to 198.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,616**
56322	191.9 to 192.9 feet	**Vertical Change**	-.4"	6 ft	6	REF		
56323	200.5 to 201.5 feet	**Vertical Change**	.46"	6 ft	6	LF	$75	**$450**
56324	213.3 to 214.3 feet	**Vertical Change**	.68"	6 ft	6	SF	$75	**$450**
56325	222.0 to 223.0 feet	**Vertical Change**	.43"	6 ft	6	REF		
56350	222.7 to 284.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	371	SF	$120	**$44,568**
56326	226.2 to 227.2 feet	**Vertical Change**	.42"	6 ft	6	REF		
56327	230.5 to 231.5 feet	**Vertical Change**	.35"	6 ft	6	REF		
56328	234.8 to 235.8 feet	**Vertical Change**	-.29"	6 ft	6	REF		
56329	243.4 to 244.4 feet	**Vertical Change**	.37"	6 ft	6	REF		
56330	247.6 to 248.6 feet	**Vertical Change**	.5"	6 ft	6	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108101331	SYCAMORE AVE	S LAKE ST	CLINTON ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56331	251.8 to 252.8 feet	Vertical Change	.33"	6 ft	6	REF		
56332	260.4 to 261.4 feet	Vertical Change	.36"	6 ft	6	REF		
56333	268.9 to 269.9 feet	Vertical Change	.47"	6 ft	6	REF		
56334	277.4 to 278.4 feet	Vertical Change	.5"	6 ft	6	SF	$75	**$450**
56351	290.7 to 297.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	40	SF	$120	**$4,752**
56335	298.1 to 299.1 feet	Vertical Change	.31"	6 ft	6	LF	$75	**$450**
56336	302.1 to 303.1 feet	Vertical Change	-.5"	6 ft	6	REF		
56352	303.1 to 314.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	67	SF	$120	**$7,992**
56353	317.0 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,456**
56337	318.4 to 319.4 feet	Vertical Change	.28"	6 ft	6	REF		
56338	322.9 to 323.9 feet	Vertical Change	.27"	6 ft	6	REF		
56354	323.9 to 332.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	53	SF	$120	**$6,336**
56355	334.5 to 335.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
56339	339.6 to 340.6 feet	Vertical Change	-.27"	6 ft	6	LF	$75	**$450**
56356	351.1 to 352.3 feet		5.0-6.0%	6 ft	7			

TOTAL COST FOR: S *side of* **SYCAMORE AVE** *Starting at:* **S LAKE ST** **$117,108.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081219	TAFT DR	CHAPIN ST	TRUMAN DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126339	0.0 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
126340	13.0 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
126335	36.9 to 37.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
126341	40.7 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
126336	47.1 to 48.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
126342	48.5 to 52.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
126343	53.8 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
126344	63.4 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
126337	64.3 to 65.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
126338	72.5 to 73.5 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **TAFT DR** *Starting at:* **CHAPIN ST** **$34,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081217	TAFT DR	TRUMAN DR	CHAPIN ST	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126331	3.3 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
126332	35.8 to 52.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
126328	36.9 to 37.9 feet	**Vertical Change**	-.3"	5 ft	5	REF		
126333	52.2 to 68.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
126329	54.3 to 55.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
126334	68.8 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
126330	71.5 to 72.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **TAFT DR** *Starting at:* **TRUMAN DR** **$37,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071230	TALISE AVE	E ELLIS ST	LA JOLLA CT	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
123262	0.0 to 2.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
123263	2.6 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
123259	3.8 to 4.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
123260	10.1 to 11.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
123264	19.6 to 26.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,380**
123265	27.6 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
123261	36.2 to 37.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
123266	37.7 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
123267	40.8 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
123268	66.3 to 70.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: W *side of* **TALISE AVE** *Starting at:* **E ELLIS ST** **$37,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071636	TALISE AVE	LA JOLLA WY	E ELLIS ST	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125316	8.5 to 22.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
125317	24.7 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
125318	30.7 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
125319	55.0 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**

TOTAL COST FOR: E *side of* **TALISE AVE** *Starting at:* **LA JOLLA WY** **$29,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201152	TANGERINE AVE	2020 TANGERINE AVE	MANGO AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104922	0.2 to 1.2 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
104955	0.3 to 19.2 feet	Key Note Segment		5 ft	95			
104938	20.3 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
104939	22.5 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,300
104923	27.8 to 28.8 feet	Vertical Change	.27"	5 ft	5	REF		
104940	46.2 to 53.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
104941	58.1 to 66.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	$4,980
104956	66.8 to 86.4 feet	Key Note Segment		5 ft	98			
104924	67.5 to 68.5 feet	Vertical Change	.27"	5 ft	5	REF		
104926	86.6 to 87.6 feet	Vertical Change	.41"	5 ft	5	LF	$75	$375
104942	88.0 to 89.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020
104957	94.5 to 114.0 feet	Key Note Segment		5 ft	98			
104927	95.1 to 96.1 feet	Vertical Change	.33"	5 ft	5	REF		
104928	104.8 to 105.8 feet	Vertical Change	.28"	5 ft	5	REF		
104943	114.4 to 118.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	22	SF	$40	$880
104944	120.3 to 160.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	203	SF	$120	$24,360
104929	137.0 to 138.0 feet	Vertical Change	-.3"	5 ft	5	REF		
104930	155.9 to 156.9 feet	Vertical Change	.27"	5 ft	5	REF		
104958	161.2 to 181.2 feet	Key Note Segment		5 ft	100			
104931	171.9 to 172.9 feet	Vertical Change	-.39"	5 ft	5	REF		
104959	189.7 to 209.1 feet	Key Note Segment		5 ft	97			
104932	190.1 to 191.1 feet	Vertical Change	.43"	5 ft	5	REF		
104933	209.1 to 210.1 feet	Vertical Change	.33"	5 ft	5	REF		
104945	210.2 to 212.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	$1,380
104946	212.5 to 252.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	199	SF	$120	$23,820
104947	252.6 to 254.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
104960	256.7 to 276.5 feet	Key Note Segment		5 ft	99			
104934	267.0 to 268.0 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201152	TANGERINE AVE	2020 TANGERINE AVE	MANGO AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104935	276.4 to 277.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
104948	277.5 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
104961	284.8 to 303.4 feet	Key Note Segment		5 ft	93			
104936	285.3 to 286.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
104949	304.6 to 319.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,940**
104937	312.4 to 313.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
104950	319.5 to 332.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
104951	333.5 to 334.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
104962	336.5 to 356.4 feet	Key Note Segment		5 ft	100			
104952	358.6 to 359.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
104953	360.2 to 367.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
104954	371.9 to 372.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: W *side of* **TANGERINE AVE** *Starting at:* **2020 TANGERINE AVE** **$102,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201210	TANGERINE AVE	2045 TANGERINE AVE	2045 TANGERINE AVE	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105064	0.5 to 5.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
105065	5.9 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
105061	8.8 to 9.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
105066	10.5 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
105070	14.6 to 34.9 feet	Key Note Segment		5 ft	102			
105063	35.3 to 36.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
105067	36.8 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
105068	40.2 to 45.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
105069	46.0 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **2045 TANGERINE AVE** **$25,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201148	TANGERINE AVE	GEORGIA AVE	2010 TANGERINE AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104901	8.6 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
104892	19.5 to 20.5 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**
104902	27.8 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$18,000**
104893	33.4 to 34.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
104903	60.2 to 69.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
104904	72.2 to 81.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
104905	83.6 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
104917	87.0 to 109.2 feet	Key Note Segment		5 ft	111			
104906	110.3 to 119.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
104907	120.8 to 122.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
104918	122.2 to 141.8 feet	Key Note Segment		5 ft	98			
104894	123.2 to 124.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
104908	142.4 to 148.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	33	SF	$40	**$1,300**
104909	152.3 to 161.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
104910	169.3 to 182.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
104895	170.3 to 171.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
104911	185.3 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
104919	189.7 to 208.9 feet	Key Note Segment		5 ft	96			
104912	209.7 to 210.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
104920	215.7 to 236.4 feet	Key Note Segment		5 ft	104			
104896	216.8 to 217.8 feet	**Vertical Change**	2.69"	5 ft	5	REF		
104897	227.5 to 228.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
104898	236.8 to 237.8 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
104913	240.6 to 242.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
104899	254.0 to 255.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
104914	255.4 to 260.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
104915	263.3 to 283.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
104921	284.2 to 303.4 feet	Key Note Segment		5 ft	96			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201148	TANGERINE AVE	GEORGIA AVE	2010 TANGERINE AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104916	303.7 to 306.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
104900	304.1 to 305.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TANGERINE AVE** *Starting at:* **GEORGIA AVE** **$75,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201220	TANGERINE AVE	GRAPEFRUIT WAY	GEORGIA AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105133	0.0 to 3.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
105134	4.3 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,120**
105126	15.9 to 16.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
105135	26.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	281	SF	$120	**$33,660**
105127	58.0 to 59.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
105128	66.0 to 67.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
105136	85.2 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
105137	103.5 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
105138	128.3 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
105139	139.9 to 200.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	305	SF	$40	**$12,180**
105130	153.2 to 154.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
105140	200.8 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
105141	204.8 to 228.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
105142	234.8 to 275.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,480**
105131	273.6 to 274.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
105143	279.1 to 283.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
105144	283.8 to 284.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105132	284.8 to 285.8 feet	**Vertical Change**	1.33"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **GRAPEFRUIT WAY** **$129,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201209	TANGERINE AVE	MANGO AVE	2057 TANGERINE AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105053	0.5 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
105054	18.8 to 23.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
105058	26.8 to 46.1 feet	Key Note Segment		5 ft	97			
105049	27.5 to 28.5 feet	**Vertical Change**	1.42"	5 ft	5	REF		
105050	46.1 to 47.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
105055	48.1 to 55.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
105059	55.4 to 73.4 feet	Key Note Segment		5 ft	90			
105051	64.6 to 65.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
105056	75.5 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	322	SF	$120	**$38,580**
105052	124.3 to 125.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
105060	139.8 to 160.2 feet	Key Note Segment		5 ft	102			
105057	161.6 to 162.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **MANGO AVE** **$55,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191320	TANGERINE AVE	NAVEL AVE	PARKWOOD AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103345	3.1 to 22.3 feet	Key Note Segment		5 ft	96			
103311	3.4 to 4.4 feet	Vertical Change	.78"	5 ft	5	REF		
103312	23.2 to 24.2 feet	Vertical Change	-.98"	5 ft	5	SF	$75	$375
103325	24.6 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	$12,000
103313	29.9 to 30.9 feet	Vertical Change	.59"	5 ft	5	REF		
103314	41.9 to 42.9 feet	Vertical Change	.47"	5 ft	5	REF		
103315	49.6 to 50.6 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
103326	52.0 to 67.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	$9,480
103346	67.8 to 86.9 feet	Key Note Segment		5 ft	96			
103327	89.3 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
103347	93.8 to 112.8 feet	Key Note Segment		5 ft	95			
103316	103.9 to 104.9 feet	Vertical Change	.28"	5 ft	5	REF		
103317	113.5 to 114.5 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
103328	114.8 to 119.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
103329	123.8 to 129.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,420
103330	133.2 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
103318	140.6 to 141.6 feet	Vertical Change	2.33"	5 ft	5	REF		
103319	142.5 to 143.5 feet	Vertical Change	1.11"	5 ft	5	REF		
103331	143.4 to 149.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	$3,600
103332	153.0 to 154.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$960
103348	154.6 to 174.6 feet	Key Note Segment		5 ft	100			
103333	177.1 to 184.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	$4,440
103349	184.5 to 204.4 feet	Key Note Segment		5 ft	100			
103334	205.8 to 224.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	$11,400
103320	225.1 to 226.1 feet	Vertical Change	-.34"	5 ft	5	LF	$75	$375
103321	230.6 to 231.6 feet	Vertical Change	-.3"	5 ft	5	LF	$75	$375
103335	235.9 to 239.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
103336	240.2 to 253.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,740

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191320	TANGERINE AVE	NAVEL AVE	PARKWOOD AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103322	240.7 to 241.7 feet	Vertical Change	.27"	5 ft	5	REF		
103350	253.3 to 272.9 feet	Key Note Segment		5 ft	98			
103337	274.7 to 285.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
103354	283.8 to 284.8 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
103351	285.7 to 304.3 feet	Key Note Segment		5 ft	93			
103338	306.3 to 313.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
103339	313.5 to 330.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
103340	331.7 to 338.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
103341	339.0 to 348.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
103352	348.9 to 367.3 feet	Key Note Segment		5 ft	92			
103323	358.6 to 359.6 feet	Vertical Change	-.32"	5 ft	5	REF		
103342	369.5 to 374.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
103353	374.7 to 393.5 feet	Key Note Segment		5 ft	94			
103343	395.3 to 404.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
103344	409.1 to 418.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
103324	412.9 to 413.9 feet	Vertical Change	.44"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TANGERINE AVE** *Starting at:* **NAVEL AVE** **$112,434.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191350	TANGERINE AVE	PARKWOOD AVE	PERKINS AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103550	0.0 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,280**
103551	21.2 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
103552	26.8 to 37.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,300**
103553	40.8 to 49.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
103554	52.9 to 63.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
103555	66.8 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
103556	75.5 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	231	SF	$120	**$27,660**
103557	125.8 to 128.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
103558	128.0 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
103549	144.6 to 145.6 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **PARKWOOD AVE** **$75,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191328	TANGERINE AVE	PARKWOOD AVE	STANFORD AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103378	0.0 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
103395	15.5 to 34.4 feet	Key Note Segment		5 ft	95			
103379	34.4 to 40.9 feet	Cross Slope (Driveway)	5.0-6.0%	5 ft	33	SF	$40	**$1,300**
103369	34.5 to 35.5 feet	Vertical Change	.29"	5 ft	5	REF		
103380	41.8 to 42.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
103381	42.8 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
103370	44.6 to 45.6 feet	Vertical Change	-.3"	5 ft	5	REF		
103382	47.4 to 61.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
103396	62.5 to 81.7 feet	Key Note Segment		5 ft	96			
103371	81.8 to 82.8 feet	Vertical Change	.28"	5 ft	5	REF		
103383	83.2 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
103384	86.5 to 87.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
103372	86.9 to 87.9 feet	Vertical Change	.3"	5 ft	5	REF		
103385	88.5 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
103397	90.8 to 109.7 feet	Key Note Segment		5 ft	95			
103386	110.0 to 140.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	153	SF	$40	**$6,140**
103373	110.1 to 111.1 feet	Vertical Change	.76"	5 ft	5	REF		
103374	132.0 to 133.0 feet	Vertical Change	.27"	5 ft	5	REF		
103387	141.8 to 143.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
103388	144.3 to 145.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
103389	146.2 to 147.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
103390	149.6 to 150.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
103391	151.3 to 156.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,180**
103392	156.6 to 159.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
103398	159.3 to 178.4 feet	Key Note Segment		5 ft	95			
103393	180.1 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
103399	182.8 to 204.3 feet	Key Note Segment		5 ft	108			
103375	183.3 to 184.3 feet	Vertical Change	.56"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191328	TANGERINE AVE	PARKWOOD AVE	STANFORD AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103376	189.4 to 190.4 feet	Vertical Change	3.02"	5 ft	5	REF		
103377	204.3 to 205.3 feet	Vertical Change	.39"	5 ft	5	REF		
103394	204.6 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: W *side of* **TANGERINE AVE** *Starting at:* **PARKWOOD AVE** **$42,600.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191406	TANGERINE AVE	PERKINS AVE	NAVEL AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103608	1.4 to 28.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,380**
103609	29.4 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	320	SF	$120	**$38,340**
103607	93.9 to 94.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
103610	96.0 to 104.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
103611	110.6 to 122.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
103612	122.8 to 141.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,340**
103613	141.8 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **PERKINS AVE** **$80,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201037	TANGERINE AVE	SAN CARLOS AVE	SAN JOSE AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104564	0.3 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
104573	5.0 to 24.9 feet	Key Note Segment		5 ft	100			
104555	25.7 to 26.7 feet	**Vertical Change**	-.51"	5 ft	5	REF		
104565	26.3 to 31.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
104574	31.7 to 52.0 feet	Key Note Segment		5 ft	102			
104556	43.5 to 44.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
104566	56.9 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
104567	78.3 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
104568	92.9 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
104575	96.6 to 115.8 feet	Key Note Segment		5 ft	96			
104557	116.7 to 117.7 feet	**Vertical Change**	-.41"	5 ft	5	LF	$75	**$375**
104569	118.1 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
104576	124.4 to 143.3 feet	Key Note Segment		5 ft	95			
104558	125.1 to 126.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
104559	145.0 to 146.0 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
104570	148.4 to 166.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
104560	173.3 to 174.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
104561	184.1 to 185.1 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
104571	188.1 to 189.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
104577	191.5 to 211.6 feet	Key Note Segment		5 ft	101			
104562	192.8 to 193.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
104563	212.0 to 213.0 feet	**Vertical Change**	.5"	5 ft	5	REF		
104572	216.9 to 218.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: W *side of* **TANGERINE AVE** *Starting at:* **SAN CARLOS AVE** **$37,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201105	TANGERINE AVE	SAN JOSE AVE	SAN CARLOS AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104713	0.2 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
104711	6.4 to 7.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
104714	7.1 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
104715	25.5 to 30.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
104716	38.8 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
104717	51.8 to 55.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
104718	67.0 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
104719	71.6 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	176	SF	$120	**$21,120**
104720	109.6 to 132.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,860**
104712	121.2 to 122.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
104721	135.4 to 139.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
104722	139.5 to 143.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **SAN JOSE AVE** **$58,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191343	TANGERINE AVE	STANFORD AVE	PARKWOOD AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103491	0.0 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
103492	7.8 to 16.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
103482	11.3 to 12.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
103483	17.6 to 18.6 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
103493	19.7 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
103484	28.3 to 29.3 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
103494	32.2 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
103485	32.5 to 33.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103486	34.7 to 35.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
103495	38.1 to 40.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
103496	40.4 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
103488	61.5 to 64.3 feet	**Vertical Change**	.27"	5 ft	14	LF	$75	**$1,050**
103497	66.2 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
103498	74.4 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,740**
103499	101.3 to 132.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
103490	132.7 to 133.7 feet	**Vertical Change**	1.44"	5 ft	5	SF	$75	**$375**
103500	135.4 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: E *side of* **TANGERINE AVE** *Starting at:* **STANFORD AVE** **$67,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150835	TAYLOR LANE	KIMBERLEY LN	MARIE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66653	0.5 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
66654	13.3 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
66655	25.5 to 29.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
66656	29.5 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
66675	37.6 to 65.5 feet	Key Note Segment		5 ft	140			
66649	41.1 to 42.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
66657	72.5 to 89.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,020**
66676	91.3 to 111.8 feet	Key Note Segment		5 ft	103			
66650	105.9 to 106.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
66651	113.3 to 114.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
66658	114.8 to 115.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
66659	119.3 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
66660	134.6 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66661	143.2 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
66677	161.0 to 179.0 feet	Key Note Segment		5 ft	90			
66662	184.3 to 185.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
66663	188.0 to 193.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
66664	195.8 to 198.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
66665	199.6 to 211.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
66666	217.7 to 220.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
66667	227.0 to 228.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
66668	231.9 to 236.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
66678	238.3 to 266.1 feet	Key Note Segment		5 ft	139			
66669	268.1 to 270.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
66670	270.4 to 273.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
66671	276.4 to 283.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
66672	301.1 to 303.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
66673	305.6 to 306.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109150835	TAYLOR LANE	KIMBERLEY LN	MARIE DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66679	307.0 to 336.1 feet	Key Note Segment		5 ft	146			
66674	336.5 to 339.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**

TOTAL COST FOR: E *side of* **TAYLOR LANE** *Starting at:* **KIMBERLEY LN** **$65,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150958	TAYLOR LANE	KIMBERLY DR	PAMELA DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67583	0.0 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
67584	4.8 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
67585	13.1 to 15.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
67586	15.6 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
67587	26.8 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
67616	36.5 to 55.1 feet	Key Note Segment		5 ft	93			
67576	59.0 to 60.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
67588	59.2 to 60.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
67617	61.6 to 89.3 feet	Key Note Segment		5 ft	139			
67577	99.6 to 100.6 feet	**Vertical Change**	3.03"	5 ft	5	SF	$75	**$375**
67589	106.8 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
67590	115.4 to 124.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
67591	124.8 to 131.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
67592	136.8 to 138.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
67618	141.6 to 160.3 feet	Key Note Segment		5 ft	94			
67578	163.2 to 164.2 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
67593	182.3 to 191.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
67594	194.4 to 197.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
67595	208.3 to 213.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
67596	216.0 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
67597	228.6 to 233.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
67598	234.2 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
67599	238.1 to 261.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	116	SF	$120	**$13,920**
67579	246.9 to 247.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
67600	263.5 to 265.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
67601	270.4 to 271.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
67602	273.7 to 274.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
67619	276.3 to 290.6 feet	Key Note Segment		5 ft	72			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150958	TAYLOR LANE	KIMBERLY DR	PAMELA DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67603	290.6 to 292.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	8	SF	$40	$320
67620	297.7 to 314.1 feet	Key Note Segment		5 ft	82			
67604	322.3 to 326.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	$2,580
67621	326.6 to 339.2 feet	Key Note Segment		5 ft	63			
67580	346.7 to 347.7 feet	Vertical Change	.56"	5 ft	5	SF	$75	$375
67622	353.8 to 366.6 feet	Key Note Segment		5 ft	64			
67581	371.2 to 372.2 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
67623	376.8 to 392.3 feet	Key Note Segment		5 ft	78			
67624	398.5 to 414.6 feet	Key Note Segment		5 ft	81			
67605	422.2 to 434.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	61	SF	$120	$7,260
67606	438.2 to 445.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,080
67607	448.2 to 451.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
67608	453.9 to 460.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	$3,960
67609	460.7 to 463.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
67610	504.1 to 508.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
67611	529.3 to 537.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
67612	554.8 to 577.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	$13,680
67613	580.1 to 586.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$4,020
67614	592.4 to 603.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	$6,600
67582	600.6 to 601.6 feet	Vertical Change	.29"	5 ft	5	REF		
67615	604.6 to 606.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900

TOTAL COST FOR: W *side of* **TAYLOR LANE** *Starting at:* **KIMBERLY DR** **$117,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109150944	TAYLOR LANE	MARIE DR	KIMBERLY DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67421	0.5 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
67422	14.9 to 17.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
67419	15.4 to 16.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
67423	56.0 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
67424	71.8 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,580**
67425	79.9 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
67426	118.2 to 130.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
67427	131.3 to 132.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
67428	135.4 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
67429	152.4 to 155.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
67430	158.8 to 160.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
67431	165.3 to 168.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
67439	168.3 to 200.7 feet	Key Note Segment		5 ft	162			
67432	201.5 to 216.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,820**
67420	209.7 to 210.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
67433	216.6 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
67434	229.8 to 237.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
67435	237.7 to 239.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
67436	242.2 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
67440	250.8 to 273.8 feet	Key Note Segment		5 ft	115			
67437	274.3 to 292.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	93	SF	$40	**$3,700**
67438	293.4 to 300.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
67441	304.6 to 305.9 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **TAYLOR LANE** *Starting at:* **MARIE DR** **$93,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109151002	TAYLOR LANE	PAMELA DR	KIMBERLY DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67635	1.2 to 6.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
67636	6.9 to 8.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
67637	12.5 to 13.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
67668	13.7 to 31.5 feet	Key Note Segment		5 ft	89			
67638	46.1 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
67669	63.4 to 81.7 feet	Key Note Segment		5 ft	92			
67625	81.1 to 82.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
67639	86.1 to 90.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
67670	90.1 to 109.7 feet	Key Note Segment		5 ft	98			
67640	110.6 to 116.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
67641	119.3 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
67642	140.0 to 146.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
67643	148.8 to 151.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
67644	154.6 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
67671	164.9 to 182.1 feet	Key Note Segment		5 ft	86			
67645	182.8 to 183.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
67646	184.4 to 185.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
67626	184.8 to 185.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
67647	185.9 to 186.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67648	189.7 to 190.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
67672	191.8 to 209.8 feet	Key Note Segment		5 ft	90			
67627	196.4 to 197.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
67649	214.0 to 221.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
67650	224.8 to 226.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
67651	229.2 to 240.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
67652	258.6 to 259.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
67653	261.0 to 267.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
67654	267.7 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109151002	TAYLOR LANE	PAMELA DR	KIMBERLY DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
67673	270.2 to 283.3 feet	Key Note Segment		5 ft	66			
67628	286.5 to 287.5 feet	Vertical Change	.44"	5 ft	5	REF		
67655	287.3 to 290.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
67674	297.6 to 312.4 feet	Key Note Segment		5 ft	74			
67656	318.8 to 340.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
67657	342.9 to 347.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
67629	348.4 to 349.4 feet	Vertical Change	.46"	5 ft	5	LF	$75	**$375**
67658	350.4 to 351.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
67659	352.5 to 354.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
67660	360.3 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
67630	360.5 to 361.5 feet	Vertical Change	.85"	5 ft	5	REF		
67675	363.7 to 384.1 feet	Key Note Segment		5 ft	102			
67661	390.4 to 405.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
67631	393.9 to 394.9 feet	Vertical Change	-.26"	5 ft	5	REF		
67662	410.0 to 411.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
67663	415.1 to 418.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
67676	418.8 to 436.2 feet	Key Note Segment		5 ft	87			
67632	428.6 to 429.6 feet	Vertical Change	.27"	5 ft	5	REF		
67633	438.5 to 439.5 feet	Vertical Change	.28"	5 ft	5	REF		
67664	439.5 to 445.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
67677	446.2 to 475.2 feet	Key Note Segment		5 ft	145			
67634	446.9 to 447.9 feet	Vertical Change	.26"	5 ft	5	REF		
67665	477.9 to 485.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
67666	488.7 to 494.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
67667	496.4 to 503.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
67678	501.5 to 502.8 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: E *side of* **TAYLOR LANE** *Starting at:* **PAMELA DR** **$113,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311158	TAYLOR ST	1408 TAYLOR ST	134 SARAH ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114823	2.7 to 22.3 feet	Key Note Segment		5 ft	98			
114816	2.9 to 3.9 feet	**Vertical Change**	.7"	5 ft	5	REF		
114817	22.4 to 23.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
114821	25.6 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
114824	27.1 to 46.6 feet	Key Note Segment		5 ft	98			
114822	50.9 to 77.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,960**
114819	68.3 to 69.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
114825	78.3 to 99.3 feet	Key Note Segment		5 ft	105			
114820	99.4 to 100.4 feet	**Vertical Change**	.33"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **TAYLOR ST** *Starting at:* **1408 TAYLOR ST** **$16,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311207	TAYLOR ST	SARAH ST	W CLARK ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114876	0.0 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
114867	5.2 to 6.2 feet	**Vertical Change**	1.96"	5 ft	5	REF		
114877	13.3 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
114892	17.0 to 38.8 feet	Key Note Segment		5 ft	109			
114878	42.0 to 43.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
114893	44.6 to 66.1 feet	Key Note Segment		5 ft	107			
114868	45.5 to 46.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
114879	69.1 to 72.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
114880	77.5 to 85.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	39	SF	$120	**$4,620**
114869	85.2 to 86.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
114881	85.2 to 86.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
114894	87.3 to 108.3 feet	Key Note Segment		5 ft	105			
114870	98.0 to 99.0 feet	**Vertical Change**	-.52"	5 ft	5	REF		
114871	109.1 to 110.1 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
114882	110.8 to 119.5 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	44	SF	$120	**$5,220**
114872	117.4 to 118.4 feet	**Vertical Change**	.94"	5 ft	5	REF		
114883	120.8 to 124.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
114884	127.4 to 129.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
114873	128.2 to 132.2 feet	**Vertical Change**	.28"	5 ft	20	REF		
114895	130.2 to 152.5 feet	Key Note Segment		5 ft	112			
114885	155.1 to 161.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
114886	161.4 to 162.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
114887	162.8 to 171.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,460**
114888	172.8 to 174.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
114896	175.0 to 195.8 feet	Key Note Segment		5 ft	104			
114874	175.6 to 176.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
114875	185.5 to 186.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
114897	195.8 to 196.9 feet		5.0-6.0%	5 ft	6			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201311207	TAYLOR ST	SARAH ST	W CLARK ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114889	198.7 to 203.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
114890	209.2 to 211.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
114891	211.6 to 213.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: E *side of* **TAYLOR ST** *Starting at:* **SARAH ST** **$41,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311204	TAYLOR ST	SONORA ST	TAYLOR ST	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114853	0.2 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
114842	6.9 to 7.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
114843	12.5 to 13.5 feet	**Vertical Change**	3.08"	5 ft	5	SF	$75	**$375**
114844	24.1 to 25.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
114845	50.3 to 51.3 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
114854	55.3 to 58.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
114855	61.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
114856	68.1 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
114857	79.8 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
114858	85.8 to 100.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
114865	101.0 to 121.6 feet	Key Note Segment		5 ft	103			
114846	112.3 to 113.3 feet	**Vertical Change**	.48"	5 ft	5	REF		
114859	124.3 to 143.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
114866	143.7 to 165.8 feet	Key Note Segment		5 ft	111			
114847	152.8 to 153.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
114860	167.9 to 173.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
114848	185.6 to 186.6 feet	**Vertical Change**	.53"	5 ft	5	REF		
114861	185.7 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
114849	209.5 to 210.5 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
114850	215.3 to 216.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
114851	217.6 to 218.6 feet	**Vertical Change**	3.13"	5 ft	5	SF	$75	**$375**
114862	219.9 to 221.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
114852	221.4 to 222.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
114863	230.3 to 232.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
114864	234.8 to 243.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**

TOTAL COST FOR: N *side of* **TAYLOR ST** *Starting at:* **SONORA ST** **$47,925.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311201	TAYLOR ST	TAYLOR ST	SONORA ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114839	1.0 to 20.8 feet	Key Note Segment		5 ft	99			
114832	22.8 to 38.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
114833	41.2 to 42.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
114840	43.3 to 64.3 feet	Key Note Segment		5 ft	105			
114826	43.7 to 44.7 feet	**Vertical Change**	.47"	5 ft	5	REF		
114827	64.7 to 65.7 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
114834	69.1 to 74.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
114835	77.5 to 85.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
114828	81.6 to 82.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
114841	86.2 to 108.3 feet	Key Note Segment		5 ft	111			
114829	86.8 to 87.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
114836	110.5 to 123.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
114837	123.9 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
114830	126.2 to 127.2 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
114838	148.3 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
114831	204.8 to 205.8 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **TAYLOR ST** *Starting at:* **TAYLOR ST** **$28,905.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311157	TAYLOR ST	W CLARK ST	SARAH ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114798	6.6 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
114799	13.3 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
114809	21.2 to 42.4 feet	Key Note Segment		5 ft	106			
114782	32.4 to 33.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
114783	42.7 to 43.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
114800	43.4 to 49.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
114810	49.6 to 71.1 feet	Key Note Segment		5 ft	107			
114801	71.5 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
114802	75.6 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
114811	92.2 to 113.9 feet	Key Note Segment		5 ft	109			
114784	113.5 to 114.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
114785	124.2 to 125.2 feet	**Vertical Change**	.58"	5 ft	5	SF	$75	**$375**
114803	128.8 to 134.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,540**
114812	135.5 to 157.1 feet	Key Note Segment		5 ft	108			
114786	135.9 to 136.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
114787	156.9 to 157.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
114804	161.3 to 177.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
114788	166.9 to 167.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
114813	178.8 to 199.8 feet	Key Note Segment		5 ft	105			
114789	178.9 to 179.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
114790	199.6 to 200.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
114805	201.0 to 224.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	115	SF	$120	**$13,800**
114791	212.3 to 213.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
114814	224.2 to 245.5 feet	Key Note Segment		5 ft	107			
114792	225.5 to 226.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
114793	238.2 to 239.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
114794	240.2 to 241.2 feet	**Vertical Change**	1.79"	5 ft	5	REF		
114806	245.8 to 246.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$220**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201311157	TAYLOR ST	W CLARK ST	SARAH ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114795	246.1 to 247.1 feet	**Vertical Change**	-.48"	5 ft	5	REF		
114807	247.4 to 248.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
114808	250.9 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
114815	261.3 to 283.2 feet	Key Note Segment		5 ft	110			
114796	273.0 to 274.0 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TAYLOR ST** *Starting at:* **W CLARK ST** **$56,755.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202041036	TERRACE PL	809 TERRACE PL	821 TERRACE PL	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121087	2.6 to 5.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	16	SF	$40	**$640**
121096	5.8 to 26.5 feet	Key Note Segment		5 ft	104			
121079	6.7 to 7.7 feet	Vertical Change	-.43"	5 ft	5	REF		
121088	27.1 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,920**
121080	31.9 to 32.9 feet	Vertical Change	.31"	5 ft	5	REF		
121089	42.8 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
121090	55.1 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
121081	55.5 to 56.5 feet	Vertical Change	-.58"	5 ft	5	REF		
121091	62.3 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
121097	71.2 to 97.6 feet	Key Note Segment		5 ft	132			
121092	99.6 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
121082	104.8 to 105.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
121083	106.6 to 107.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
121093	118.8 to 128.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
121084	121.5 to 122.5 feet	Vertical Change	-.26"	5 ft	5	REF		
121094	135.3 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
121095	138.9 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
121098	141.9 to 169.0 feet	Key Note Segment		5 ft	136			
121085	160.9 to 161.9 feet	Vertical Change	.33"	5 ft	5	REF		
121086	169.1 to 170.1 feet	Vertical Change	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TERRACE PL** *Starting at:* **809 TERRACE PL** **$32,590.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281049	TEVIN WAY	KIMBERLEY LN	MACADAMIA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112206	0.0 to 1.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
112224	1.3 to 18.6 feet	Key Note Segment		5 ft	87			
112197	6.6 to 7.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
112207	24.6 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
112198	33.0 to 34.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
112208	46.3 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
112225	51.8 to 71.6 feet	Key Note Segment		5 ft	99			
112209	74.5 to 81.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
112226	81.9 to 100.5 feet	Key Note Segment		5 ft	93			
112199	91.1 to 92.1 feet	**Vertical Change**	.94"	5 ft	5	REF		
112210	101.3 to 105.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
112211	109.0 to 127.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
112200	110.7 to 111.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
112201	116.8 to 117.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
112212	128.3 to 137.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
112213	145.9 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
112227	158.6 to 179.7 feet	Key Note Segment		5 ft	106			
112202	158.8 to 159.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
112228	187.1 to 206.5 feet	Key Note Segment		5 ft	97			
112214	208.3 to 210.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
112215	211.0 to 215.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
112216	217.6 to 219.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
112217	219.7 to 240.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
112218	243.3 to 245.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
112219	249.1 to 251.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
112220	254.5 to 263.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
112229	263.3 to 282.8 feet	Key Note Segment		5 ft	98			
112221	284.2 to 288.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281049	TEVIN WAY	KIMBERLEY LN	MACADAMIA AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112230	288.3 to 310.4 feet	Key Note Segment		5 ft	110			
112203	297.5 to 298.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
112204	304.0 to 305.0 feet	**Vertical Change**	-.42"	5 ft	5	REF		
112205	311.2 to 312.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112222	311.4 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
112223	317.9 to 329.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**

TOTAL COST FOR: E *side of* **TEVIN WAY** *Starting at:* **KIMBERLEY LN** **$78,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201281052	TEVIN WAY	MACADAMIA AVE	KIMBERLEY LN	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
112241	0.0 to 17.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
112231	1.4 to 2.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
112253	17.3 to 39.3 feet	Key Note Segment		5 ft	110			
112232	24.3 to 25.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
112233	30.9 to 31.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
112242	42.2 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
112254	45.8 to 63.9 feet	Key Note Segment		5 ft	91			
112243	67.0 to 69.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,260**
112244	69.3 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
112234	79.0 to 80.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
112245	89.0 to 97.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
112235	89.7 to 90.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
112246	97.1 to 105.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
112236	104.9 to 108.4 feet	**Vertical Change**	.28"	5 ft	18	REF		
112247	110.6 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
112248	115.3 to 119.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
112237	120.7 to 121.7 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
112255	122.0 to 140.8 feet	Key Note Segment		5 ft	94			
112238	131.7 to 132.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
112249	142.7 to 146.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
112250	147.6 to 149.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
112256	149.9 to 167.6 feet	Key Note Segment		5 ft	89			
112251	172.6 to 197.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
112239	174.7 to 175.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
112257	199.0 to 220.4 feet	Key Note Segment		5 ft	107			
112252	221.8 to 240.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
112240	228.9 to 229.9 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TEVIN WAY** *Starting at:* **MACADAMIA AVE** **$69,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241651	THIRD ST	1814 THIRD ST	1814 THIRD ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107758	0.0 to 25.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	102	SF	$120	**$12,192**
107759	25.6 to 26.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	4	SF	$120	**$528**
107760	27.8 to 34.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,120**
107756	31.4 to 32.4 feet	**Vertical Change**	.3"	4 ft	4	REF		
107762	35.1 to 61.3 feet	Key Note Segment		4 ft	105			
107757	56.7 to 57.7 feet	**Vertical Change**	.83"	4 ft	4	REF		
107761	61.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**

TOTAL COST FOR: S *side of* **THIRD ST** *Starting at:* **1814 THIRD ST** **$16,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241644	THIRD ST	WILLIAMS AVE	SCHNOOR AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107694	0.0 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	86	SF	$120	**$10,296**
107695	16.8 to 17.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
107696	20.2 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
107674	30.1 to 31.1 feet	**Vertical Change**	.3"	6 ft	6	LF	$75	**$450**
107697	34.3 to 42.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	47	SF	$120	**$5,616**
107749	42.4 to 77.2 feet	Key Note Segment		6 ft	209			
107698	80.7 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,448**
107699	87.0 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
107750	100.6 to 121.5 feet	Key Note Segment		6 ft	125			
107675	111.7 to 112.7 feet	**Vertical Change**	.3"	6 ft	6	REF		
107700	123.5 to 130.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,112**
107701	133.8 to 169.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	211	SF	$120	**$25,344**
107676	147.7 to 148.7 feet	**Vertical Change**	.57"	6 ft	6	REF		
107702	171.9 to 175.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	19	SF	$120	**$2,304**
107703	175.8 to 179.0 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	19	SF	$120	**$2,304**
107704	179.0 to 180.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	10	SF	$120	**$1,224**
107705	180.9 to 187.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
107706	187.7 to 198.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	64	SF	$120	**$7,704**
107707	200.8 to 210.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	61	SF	$120	**$7,272**
107708	210.9 to 217.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,608**
107709	220.2 to 245.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	153	SF	$120	**$18,360**
107710	246.0 to 247.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
107711	249.4 to 279.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	182	SF	$120	**$21,816**
107677	272.8 to 273.8 feet	**Vertical Change**	1.74"	6 ft	6	REF		
107712	279.7 to 286.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	40	SF	$120	**$4,752**
107751	287.0 to 300.7 feet	Key Note Segment		6 ft	82			
107713	303.2 to 316.8 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	82	SF	$120	**$9,792**
107678	306.7 to 307.7 feet	**Vertical Change**	3.24"	6 ft	6	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241644	THIRD ST	WILLIAMS AVE	SCHNOOR AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107679	315.6 to 316.6 feet	Vertical Change	2.49"	6 ft	6	REF		
107714	317.1 to 322.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	34	SF	$120	$4,104
107715	322.8 to 334.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	71	SF	$120	$8,496
107716	337.5 to 342.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	32	SF	$120	$3,816
107717	345.8 to 365.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	115	SF	$120	$13,824
107680	357.6 to 358.6 feet	Vertical Change	.71"	6 ft	6	REF		
107718	367.1 to 389.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	134	SF	$120	$16,128
107681	367.8 to 368.8 feet	Vertical Change	.28"	6 ft	6	REF		
107719	391.7 to 468.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	462	SF	$120	$55,440
107720	469.9 to 497.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	163	SF	$120	$19,584
107682	499.4 to 500.4 feet	Vertical Change	3.43"	6 ft	6	REF		
107721	499.9 to 512.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	78	SF	$120	$9,360
107722	528.9 to 532.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	20	SF	$120	$2,448
107723	532.6 to 537.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	$3,384
107724	537.8 to 553.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	92	SF	$120	$11,088
107725	555.4 to 564.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	56	SF	$120	$6,696
107726	564.8 to 566.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	$936
107727	570.4 to 581.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	65	SF	$120	$7,848
107728	581.6 to 582.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	$864
107729	585.6 to 592.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	43	SF	$120	$5,184
107683	593.5 to 594.5 feet	Vertical Change	.33"	6 ft	6	REF		
107730	593.6 to 646.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	319	SF	$120	$38,304
107684	603.9 to 604.9 feet	Vertical Change	.31"	6 ft	6	REF		
107685	606.9 to 607.9 feet	Vertical Change	3.3"	6 ft	6	REF		
107731	649.0 to 692.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	260	SF	$120	$31,176
107686	650.4 to 651.4 feet	Vertical Change	.42"	6 ft	6	REF		
107687	667.3 to 668.3 feet	Vertical Change	3.41"	6 ft	6	REF		
107688	691.9 to 692.9 feet	Vertical Change	2.39"	6 ft	6	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201241644	THIRD ST	WILLIAMS AVE	SCHNOOR AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107732	692.6 to 698.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	38	SF	$120	**$4,536**
107689	696.0 to 697.0 feet	**Vertical Change**	.34"	6 ft	6	REF		
107733	699.6 to 701.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
107734	706.6 to 710.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
107735	713.5 to 723.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	58	SF	$120	**$6,984**
107736	728.8 to 734.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	33	SF	$120	**$3,960**
107737	734.3 to 735.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
107752	739.3 to 758.1 feet	Key Note Segment		6 ft	113			
107690	751.4 to 752.4 feet	**Vertical Change**	.5"	6 ft	6	REF		
107738	762.3 to 763.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
107739	766.3 to 800.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	208	SF	$120	**$24,912**
107753	805.3 to 818.6 feet	Key Note Segment		6 ft	80			
107754	823.9 to 841.5 feet	Key Note Segment		6 ft	106			
107740	841.5 to 860.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	114	SF	$40	**$4,560**
107741	865.9 to 867.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
107742	869.3 to 879.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	63	SF	$120	**$7,560**
107743	883.6 to 884.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$864**
107691	887.8 to 888.8 feet	**Vertical Change**	.27"	6 ft	6	LF	$75	**$450**
107744	890.3 to 894.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	27	SF	$120	**$3,240**
107755	895.4 to 908.0 feet	Key Note Segment		6 ft	76			
107745	911.0 to 915.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	29	SF	$120	**$3,528**
107746	916.6 to 932.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	97	SF	$120	**$11,664**
107747	937.5 to 979.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	251	SF	$120	**$30,096**
107692	968.0 to 969.0 feet	**Vertical Change**	-.56"	6 ft	6	REF		
107748	983.0 to 1007.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	149	SF	$120	**$17,856**
107693	986.8 to 987.8 feet	**Vertical Change**	2.74"	6 ft	6	REF		

TOTAL COST FOR: N *side of* **THIRD ST** *Starting at:* **WILLIAMS AVE** **$506,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261414	TIBURON WAY	FAIRFIELD WAY	HOLLOW AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109583	0.0 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	159	SF	$120	**$19,020**
109580	23.1 to 24.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
109584	32.8 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
109585	47.8 to 90.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	212	SF	$120	**$25,440**
109586	90.8 to 193.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	515	SF	$120	**$61,800**
109581	164.8 to 165.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
109587	196.8 to 203.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
109582	203.4 to 204.4 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TIBURON WAY** *Starting at:* **FAIRFIELD WAY** **$118,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261512	TIBURON WAY	HAMPTON DR	FAIRFIELD WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109952	0.0 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
109953	8.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
109936	11.9 to 12.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
109954	12.7 to 39.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
109955	43.8 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
109956	59.4 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
109957	78.3 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
109958	87.0 to 88.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
109959	91.0 to 114.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$13,980**
109975	114.3 to 158.4 feet	Key Note Segment		5 ft	221			
109937	156.5 to 157.5 feet	**Vertical Change**	.45"	5 ft	5	REF		
109938	158.4 to 159.4 feet	**Vertical Change**	-.48"	5 ft	5	REF		
109960	161.8 to 163.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
109961	166.1 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
109962	169.3 to 173.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
109963	174.0 to 194.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,120**
109976	196.6 to 232.8 feet	Key Note Segment		5 ft	181			
109939	233.8 to 234.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
109964	234.9 to 237.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
109940	238.0 to 241.5 feet	**Vertical Change**	-.31"	5 ft	18	LF	$75	**$1,313**
109965	243.5 to 245.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
109966	248.0 to 306.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	294	SF	$120	**$35,340**
109941	257.2 to 258.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109942	270.2 to 271.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
109943	286.6 to 287.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
109967	307.3 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
109968	317.7 to 329.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
109977	329.7 to 358.3 feet	Key Note Segment		5 ft	143			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261512	TIBURON WAY	HAMPTON DR	FAIRFIELD WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109944	331.0 to 332.0 feet	Vertical Change	-.34"	5 ft	5	REF		
109945	341.0 to 342.0 feet	Vertical Change	.33"	5 ft	5	REF		
109978	361.8 to 378.3 feet	Key Note Segment		5 ft	83			
109946	362.3 to 363.3 feet	Vertical Change	-.26"	5 ft	5	REF		
109947	370.5 to 371.5 feet	Vertical Change	-.3"	5 ft	5	REF		
109948	379.2 to 380.2 feet	Vertical Change	.52"	5 ft	5	SF	$75	**$375**
109969	380.5 to 381.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
109970	382.7 to 388.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
109979	388.8 to 423.3 feet	Key Note Segment		5 ft	173			
109949	414.6 to 415.6 feet	Vertical Change	.34"	5 ft	5	REF		
109950	422.0 to 423.0 feet	Vertical Change	.29"	5 ft	5	REF		
109971	425.0 to 435.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
109951	426.5 to 427.5 feet	Vertical Change	-.26"	5 ft	5	REF		
109972	435.5 to 442.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
109973	444.8 to 453.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
109974	455.4 to 461.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: E *side of* **TIBURON WAY** *Starting at:* **HAMPTON DR** **$144,682.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261424	TIBURON WAY	HOLLOW AVE	HAMPTON DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109682	0.2 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
109683	8.5 to 33.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
109675	29.8 to 30.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
109684	34.2 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
109685	42.8 to 60.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,740**
109676	51.3 to 52.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
109686	62.2 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
109687	68.8 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
109688	76.3 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
109689	84.1 to 120.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	182	SF	$120	**$21,840**
109678	121.4 to 122.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
109690	124.5 to 129.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
109691	133.9 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
109679	134.8 to 135.8 feet	**Vertical Change**	.5"	5 ft	5	REF		
109680	148.1 to 149.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
109692	149.7 to 170.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
109693	172.6 to 196.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,220**
109681	197.4 to 198.4 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **TIBURON WAY** *Starting at:* **HOLLOW AVE** **$102,285.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151524	TIMBERLINE DR	CEDAR CREEK LN	CEDAR CREEK LN	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83965	0.9 to 2.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
83966	3.0 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
83967	7.8 to 8.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
83968	9.8 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$900**
83969	14.0 to 20.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
83970	23.3 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83960	24.2 to 25.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
83961	26.7 to 27.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
83971	26.7 to 28.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
83972	31.6 to 36.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
83973	39.3 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83974	44.8 to 58.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
83962	48.3 to 49.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
83975	61.4 to 66.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,060**
83963	65.2 to 66.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
83976	67.0 to 70.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
83964	71.5 to 72.5 feet	**Vertical Change**	2.7"	5 ft	5	SF	$75	**$375**
83977	73.3 to 81.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**

TOTAL COST FOR: E *side of* **TIMBERLINE DR** *Starting at:* **CEDAR CREEK LN** **$32,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151454	TIMBERLINE DR	CEDAR CREEK LN	SULTANA DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83525	0.9 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
83526	4.5 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
83527	10.7 to 13.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,680**
83528	13.5 to 25.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
83529	25.8 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
83515	29.0 to 30.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
83530	39.4 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83531	40.6 to 52.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
83532	53.0 to 56.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
83516	54.1 to 55.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
83569	54.2 to 56.1 feet		5.0-6.0%	5 ft	10			
83533	62.8 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
83534	100.6 to 102.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
83535	106.8 to 108.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
83536	112.2 to 126.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
83517	124.9 to 125.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
83537	128.2 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
83538	141.3 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
83518	145.8 to 146.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
83539	154.3 to 160.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
83540	160.5 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
83541	169.6 to 177.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
83542	178.7 to 179.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
83543	187.0 to 194.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
83544	197.7 to 199.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
83545	202.2 to 213.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,660**
83546	217.1 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
83563	221.6 to 243.8 feet	Key Note Segment		5 ft	111			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151454	TIMBERLINE DR	CEDAR CREEK LN	SULTANA DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83519	243.2 to 244.2 feet	Vertical Change	-.28"	5 ft	5	REF		
83547	250.0 to 252.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,320
83564	253.1 to 277.0 feet	Key Note Segment		5 ft	120			
83548	278.8 to 280.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
83520	279.4 to 280.4 feet	Vertical Change	.73"	5 ft	5	REF		
83549	282.6 to 283.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
83550	291.6 to 294.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,860
83565	295.8 to 315.7 feet	Key Note Segment		5 ft	100			
83521	306.2 to 307.2 feet	Vertical Change	.78"	5 ft	5	REF		
83522	318.3 to 319.3 feet	Vertical Change	-.39"	5 ft	5	LF	$75	$375
83551	333.3 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
83552	338.0 to 344.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,020
83553	349.7 to 352.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,620
83566	352.4 to 373.5 feet	Key Note Segment		5 ft	106			
83523	362.9 to 363.9 feet	Vertical Change	.35"	5 ft	5	REF		
83554	379.1 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,660
83555	392.8 to 401.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
83567	401.4 to 426.0 feet	Key Note Segment		5 ft	123			
83556	426.5 to 429.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	17	SF	$40	$680
83568	431.8 to 453.8 feet	Key Note Segment		5 ft	110			
83524	442.8 to 443.8 feet	Vertical Change	.38"	5 ft	5	REF		
83557	454.9 to 458.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$2,040
83558	461.0 to 462.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	$720
83559	464.9 to 485.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	$12,300
83560	488.5 to 489.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
83561	489.6 to 491.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
83562	498.6 to 501.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620

TOTAL COST FOR: W *side of* **TIMBERLINE DR** *Starting at:* **CEDAR CREEK LN** **$121,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151413	TIMBERLINE DR	REN WAY	WINTER WAY	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83070	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
83071	3.3 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
83072	18.8 to 24.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
83065	24.9 to 25.9 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**
83073	26.3 to 30.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
83074	34.8 to 69.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	174	SF	$120	**$20,820**
83066	37.8 to 38.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
83067	51.1 to 52.1 feet	**Vertical Change**	3.46"	5 ft	5	REF		
83068	71.2 to 72.2 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
83075	73.8 to 78.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
83076	80.0 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
83077	99.3 to 106.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
83078	106.1 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
83069	106.7 to 107.7 feet	**Vertical Change**	.84"	5 ft	5	REF		
83079	111.0 to 122.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
83080	124.8 to 137.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,740**
83081	141.3 to 143.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **TIMBERLINE DR** *Starting at:* **REN WAY** **$70,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151316	TIMBERLINE DR	REN WAY	REN WAY	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82363	3.3 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
82359	10.9 to 11.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
82364	13.8 to 22.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
82373	24.5 to 44.6 feet	Key Note Segment		5 ft	101			
82360	25.8 to 26.8 feet	**Vertical Change**	.4"	5 ft	5	REF		
82361	42.6 to 43.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
82365	47.0 to 50.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
82374	50.8 to 70.3 feet	Key Note Segment		5 ft	98			
82366	72.6 to 77.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
82367	81.4 to 82.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
82368	86.1 to 89.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
82369	93.2 to 95.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
82362	93.8 to 94.8 feet	**Vertical Change**	.61"	5 ft	5	REF		
82370	96.4 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
82371	101.8 to 102.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
82372	105.3 to 112.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**

TOTAL COST FOR: W *side of* **TIMBERLINE DR** *Starting at:* **REN WAY** **$26,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151522	TIMBERLINE DR	SULTANA DR	CEDAR CREEK LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83927	1.4 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
83928	13.0 to 14.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83929	17.5 to 20.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
83930	21.2 to 25.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
83931	28.6 to 32.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
83932	36.1 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
83933	45.3 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,800**
83934	83.6 to 87.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
83935	90.1 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
83936	94.3 to 95.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83937	101.3 to 116.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
83912	106.1 to 107.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
83913	118.2 to 119.2 feet	**Vertical Change**	-1.06"	5 ft	5	SF	$75	**$375**
83938	119.7 to 123.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
83939	123.9 to 125.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
83940	126.3 to 127.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
83941	128.2 to 137.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
83914	134.3 to 135.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
83942	144.0 to 150.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
83943	152.3 to 168.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
83915	154.8 to 155.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
83956	168.0 to 191.1 feet	Key Note Segment		5 ft	116			
83916	190.3 to 191.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
83917	201.9 to 202.9 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
83944	208.3 to 209.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83918	213.9 to 214.9 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
83945	218.5 to 219.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83946	219.6 to 220.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151522	TIMBERLINE DR	SULTANA DR	CEDAR CREEK LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83947	223.8 to 226.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
83919	228.1 to 229.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
83948	228.9 to 232.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
83920	232.3 to 233.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
83949	232.8 to 233.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83950	236.6 to 237.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83921	237.8 to 240.9 feet	**Vertical Change**	.47"	5 ft	16	LF	$75	**$1,163**
83951	241.1 to 242.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83957	242.9 to 263.9 feet	Key Note Segment		5 ft	105			
83922	244.6 to 245.6 feet	**Vertical Change**	.58"	5 ft	5	REF		
83923	246.3 to 251.9 feet	**Vertical Change**	.3"	5 ft	28	REF		
83924	260.0 to 261.0 feet	**Vertical Change**	.43"	5 ft	5	REF		
83952	266.9 to 268.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
83958	269.4 to 290.8 feet	Key Note Segment		5 ft	107			
83925	280.7 to 281.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
83953	295.8 to 299.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
83954	302.8 to 307.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,060**
83955	310.6 to 312.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,380**
83926	314.5 to 315.5 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **TIMBERLINE DR** *Starting at:* **SULTANA DR** **$92,002.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151417	TIMBERLINE DR	SUMMER LN	WESTGATE DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83108	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
83109	5.2 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
83110	12.8 to 27.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,760**
83111	30.3 to 59.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	145	SF	$120	**$17,340**
83101	50.9 to 51.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
83112	61.7 to 69.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,560**
83102	63.8 to 64.8 feet	**Vertical Change**	-.29"	5 ft	5	REF		
83113	69.3 to 71.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
83114	71.5 to 74.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
83103	72.6 to 73.6 feet	**Vertical Change**	.48"	5 ft	5	REF		
83115	77.3 to 80.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
83116	83.6 to 84.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
83104	86.5 to 87.5 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
83117	87.7 to 99.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,960**
83105	99.8 to 100.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
83118	105.3 to 108.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
83119	111.1 to 119.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,920**
83120	121.7 to 126.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
83106	125.8 to 126.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
83121	129.5 to 134.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
83122	134.8 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
83123	141.8 to 151.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
83107	149.6 to 150.6 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TIMBERLINE DR** *Starting at:* **SUMMER LN** **$69,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151425	TIMBERLINE DR	WESTGATE DR	WESTGATE DR	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83213	1.0 to 4.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
83214	4.6 to 5.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
83223	6.6 to 29.6 feet	Key Note Segment		5 ft	115			
83215	34.9 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
83216	48.7 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
83217	57.2 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
83218	65.3 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
83224	70.7 to 87.8 feet	Key Note Segment		5 ft	86			
83219	88.1 to 89.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
83210	88.3 to 89.3 feet	**Vertical Change**	.81"	5 ft	5	REF		
83220	90.0 to 91.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
83225	92.2 to 112.0 feet	Key Note Segment		5 ft	99			
83211	93.9 to 94.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
83221	118.4 to 133.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
83212	128.0 to 129.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
83226	139.5 to 140.6 feet		5.0-6.0%	5 ft	6			
83222	140.1 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **TIMBERLINE DR** *Starting at:* **WESTGATE DR** **$28,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151430	TIMBERLINE DR	WESTGATE DR	REN WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83261	0.0 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
83262	10.5 to 11.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83263	14.8 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,000**
83284	25.0 to 46.1 feet	Key Note Segment		5 ft	106			
83254	29.5 to 30.5 feet	**Vertical Change**	.49"	5 ft	5	REF		
83285	51.3 to 72.1 feet	Key Note Segment		5 ft	104			
83264	72.1 to 78.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	32	SF	$40	**$1,280**
83265	84.4 to 92.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
83255	84.8 to 85.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
83266	92.3 to 103.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
83267	106.6 to 108.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
83256	112.3 to 113.3 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
83268	118.3 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
83257	126.2 to 127.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
83286	134.0 to 154.1 feet	Key Note Segment		5 ft	101			
83269	154.8 to 157.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
83287	157.8 to 177.8 feet	Key Note Segment		5 ft	100			
83258	168.9 to 169.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
83270	181.8 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
83271	198.6 to 202.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
83272	204.8 to 206.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
83273	207.2 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
83274	211.1 to 216.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
83275	218.4 to 223.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
83276	226.3 to 230.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
83277	230.3 to 232.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
83278	233.6 to 234.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
83279	234.8 to 238.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151430	TIMBERLINE DR	WESTGATE DR	REN WAY	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83288	239.2 to 258.5 feet	Key Note Segment		5 ft	97			
83280	260.8 to 264.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
83289	265.8 to 287.4 feet	Key Note Segment		5 ft	108			
83259	286.3 to 287.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
83281	288.8 to 292.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
83282	292.7 to 293.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83283	305.6 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$4,020**
83260	311.8 to 312.8 feet	**Vertical Change**	-.33"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TIMBERLINE DR** *Starting at:* **WESTGATE DR** **$73,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151415	TIMBERLINE DR	WINTER WAY	SUMMER LN	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83084	1.3 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83085	4.6 to 28.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	121	SF	$120	**$14,520**
83082	10.1 to 11.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
83083	23.2 to 24.2 feet	**Vertical Change**	.36"	5 ft	5	REF		
83086	29.3 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
83087	39.3 to 43.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
83088	51.8 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
83089	60.8 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
83090	69.3 to 71.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
83091	79.7 to 84.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
83092	92.1 to 102.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
83093	103.4 to 105.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
83094	110.5 to 117.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
83095	117.8 to 121.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
83096	124.7 to 127.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
83097	127.9 to 133.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
83098	136.3 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83099	137.3 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
83100	151.1 to 158.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: E *side of* **TIMBERLINE DR** *Starting at:* **WINTER WAY** **$62,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161343	TODD ST	LIBERTY LN	WESTBERRY BVD	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86649	0.0 to 1.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
86650	1.2 to 24.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	117	SF	$120	**$13,980**
86677	24.6 to 45.3 feet	Key Note Segment		5 ft	104			
86632	25.9 to 29.5 feet	**Vertical Change**	.26"	5 ft	18	REF		
86633	35.7 to 36.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
86634	43.9 to 44.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
86651	48.8 to 51.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
86678	51.1 to 82.1 feet	Key Note Segment		5 ft	155			
86635	70.1 to 71.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
86652	83.0 to 84.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
86653	86.9 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
86654	102.5 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
86679	106.5 to 137.0 feet	Key Note Segment		5 ft	153			
86636	125.4 to 126.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
86655	142.1 to 144.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
86656	148.0 to 157.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
86686	156.7 to 157.8 feet		5.0-6.0%	5 ft	6			
86680	161.8 to 190.9 feet	Key Note Segment		5 ft	145			
86637	171.7 to 172.7 feet	**Vertical Change**	.53"	5 ft	5	REF		
86657	192.7 to 194.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
86658	196.2 to 200.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
86659	202.6 to 220.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
86660	222.8 to 243.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	102	SF	$120	**$12,240**
86681	243.2 to 263.0 feet	Key Note Segment		5 ft	99			
86638	243.6 to 244.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
86639	254.0 to 255.0 feet	**Vertical Change**	.53"	5 ft	5	REF		
86640	261.7 to 262.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
86661	263.8 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112161343	TODD ST	LIBERTY LN	WESTBERRY BVD	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86662	267.0 to 274.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
86663	275.0 to 282.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
86664	286.1 to 288.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
86665	292.3 to 294.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
86666	297.3 to 298.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
86667	298.7 to 300.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
86682	300.4 to 320.8 feet	Key Note Segment		5 ft	102			
86668	321.9 to 326.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
86683	330.3 to 361.6 feet	Key Note Segment		5 ft	157			
86641	351.0 to 352.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
86642	360.4 to 361.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
86669	362.3 to 375.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	65	SF	$40	**$2,600**
86670	378.3 to 384.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
86684	388.5 to 408.9 feet	Key Note Segment		5 ft	102			
86644	389.4 to 390.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
86645	411.1 to 412.1 feet	**Vertical Change**	.62"	5 ft	5	REF		
86671	411.1 to 415.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
86672	417.5 to 418.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86673	430.0 to 433.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
86674	435.7 to 446.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
86648	442.0 to 443.0 feet	**Vertical Change**	.82"	5 ft	5	REF		
86685	446.3 to 466.8 feet	Key Note Segment		5 ft	103			
86675	470.7 to 471.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
86676	474.2 to 476.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
86687	487.7 to 490.8 feet		5.0-6.0%	5 ft	16			
86688	487.7 to 490.8 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **TODD ST** *Starting at:* **LIBERTY LN** **$100,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170853	TODD ST	WESTBERRY BVD	LIBERTY LN	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71555	1.7 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
71578	14.2 to 43.6 feet	Key Note Segment		5 ft	147			
71539	28.4 to 29.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
71556	47.9 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
71557	52.4 to 70.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
71579	70.5 to 98.1 feet	Key Note Segment		5 ft	138			
71540	100.0 to 101.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
71558	102.9 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
71559	108.3 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
71560	111.3 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
71541	112.3 to 113.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
71561	117.5 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
71580	127.7 to 156.5 feet	Key Note Segment		5 ft	144			
71542	127.8 to 128.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
71543	148.3 to 149.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
71544	155.3 to 156.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
71562	158.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
71563	166.8 to 169.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
71564	170.8 to 182.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
71581	185.7 to 214.3 feet	Key Note Segment		5 ft	143			
71565	214.8 to 215.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
71566	217.0 to 218.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
71567	222.3 to 242.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
71582	248.5 to 265.8 feet	Key Note Segment		5 ft	87			
71568	269.0 to 270.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
71569	270.2 to 290.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
71546	272.3 to 273.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
71570	293.0 to 296.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109170853	TODD ST	WESTBERRY BVD	LIBERTY LN	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71583	297.5 to 325.2 feet	Key Note Segment		5 ft	139			
71547	324.9 to 325.9 feet	Vertical Change	.28"	5 ft	5	REF		
71587	325.8 to 326.8 feet		6.0-7.0%	5 ft	5			
71571	338.2 to 341.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
71572	343.8 to 353.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
71584	353.3 to 380.2 feet	Key Note Segment		5 ft	135			
71548	356.5 to 357.5 feet	Vertical Change	.27"	5 ft	5	REF		
71549	379.8 to 380.8 feet	Vertical Change	.3"	5 ft	5	REF		
71588	380.8 to 381.9 feet		5.0-6.0%	5 ft	6			
71573	385.3 to 390.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
71585	390.3 to 415.3 feet	Key Note Segment		5 ft	125			
71551	410.5 to 411.5 feet	Vertical Change	.6"	5 ft	5	REF		
71552	414.2 to 415.2 feet	Vertical Change	-.31"	5 ft	5	REF		
71574	415.4 to 418.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	**$540**
71575	421.6 to 444.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
71586	444.0 to 473.3 feet	Key Note Segment		5 ft	147			
71576	478.0 to 485.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
71554	480.4 to 481.4 feet	Vertical Change	-.26"	5 ft	5	REF		
71577	490.0 to 494.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
71589	492.1 to 493.6 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **TODD ST** *Starting at:* **WESTBERRY BVD** **$94,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091315	TOLEDO WAY	1427 TOLEDO WAY	SEVILLA ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130043	1.4 to 19.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
130037	6.8 to 7.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
130044	19.8 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
130050	27.3 to 41.8 feet	Key Note Segment		5 ft	73			
130045	41.8 to 65.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	120	SF	$40	**$4,800**
130040	46.5 to 47.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
130051	65.8 to 81.0 feet	Key Note Segment		5 ft	76			
130041	76.3 to 77.3 feet	**Vertical Change**	1.86"	5 ft	5	REF		
130046	81.0 to 83.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
130047	85.8 to 89.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
130052	92.2 to 108.6 feet	Key Note Segment		5 ft	82			
130048	108.6 to 116.7 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	41	SF	$40	**$1,620**
130049	117.1 to 121.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
130042	121.4 to 122.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **TOLEDO WAY** *Starting at:* **1427 TOLEDO WAY** **$25,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091311	TOLEDO WAY	SAN SEBASTIAN WAY	RAYMOND RD	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130002	1.1 to 10.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
130003	12.5 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**
129975	17.8 to 18.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
130030	24.3 to 38.3 feet	Key Note Segment		5 ft	70			
129976	35.5 to 36.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
130004	40.4 to 43.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
130005	43.1 to 45.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
130006	45.2 to 46.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
130007	46.9 to 49.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
129977	49.2 to 50.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
130031	50.3 to 64.8 feet	Key Note Segment		5 ft	73			
129978	57.6 to 58.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
129979	61.8 to 62.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
130008	65.1 to 75.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	53	SF	$40	**$2,100**
129980	68.3 to 69.3 feet	**Vertical Change**	.67"	5 ft	5	REF		
130009	78.3 to 106.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	141	SF	$120	**$16,860**
129981	80.8 to 81.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
129982	98.6 to 99.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129983	100.9 to 101.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
130010	106.6 to 114.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
130011	114.8 to 124.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
130032	126.0 to 141.3 feet	Key Note Segment		5 ft	77			
129984	131.1 to 132.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
129985	134.8 to 135.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130012	141.8 to 144.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
130013	147.0 to 153.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,140**
129986	152.5 to 153.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
130033	153.9 to 167.9 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091311	TOLEDO WAY	SAN SEBASTIAN WAY	RAYMOND RD	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130014	167.9 to 199.8 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	160	SF	$40	$6,380
129988	185.4 to 189.4 feet	Vertical Change	.27"	5 ft	20	REF		
129990	202.3 to 203.3 feet	Vertical Change	.98"	5 ft	5	SF	$75	$375
130034	202.3 to 220.3 feet	Key Note Segment		5 ft	90			
129991	208.7 to 209.7 feet	Vertical Change	.27"	5 ft	5	REF		
129992	212.5 to 213.5 feet	Vertical Change	.27"	5 ft	5	REF		
130015	220.3 to 221.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$280
130016	222.6 to 224.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	$1,380
129993	226.4 to 227.4 feet	Vertical Change	.27"	5 ft	5	REF		
130017	227.0 to 232.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	$3,480
129994	233.8 to 237.3 feet	Vertical Change	.34"	5 ft	18	LF	$75	$1,313
130018	235.6 to 239.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
130019	241.4 to 247.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	$3,720
129995	246.5 to 247.5 feet	Vertical Change	.29"	5 ft	5	REF		
130035	248.2 to 259.2 feet	Key Note Segment		5 ft	55			
129996	250.4 to 251.4 feet	Vertical Change	-.27"	5 ft	5	REF		
130020	260.2 to 267.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
129997	265.1 to 266.1 feet	Vertical Change	-.29"	5 ft	5	REF		
130036	267.8 to 282.7 feet	Key Note Segment		5 ft	75			
129998	279.6 to 283.2 feet	Vertical Change	-.27"	5 ft	18	REF		
130021	282.7 to 283.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	6	SF	$40	$240
130022	286.4 to 304.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	$10,560
129999	297.8 to 298.8 feet	Vertical Change	.35"	5 ft	5	REF		
130023	315.3 to 318.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
130024	318.7 to 322.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
130000	320.2 to 321.2 feet	Vertical Change	.35"	5 ft	5	REF		
130025	326.9 to 333.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	31	SF	$120	$3,720
130026	333.4 to 336.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	$1,740

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091311	TOLEDO WAY	SAN SEBASTIAN WAY	RAYMOND RD	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130027	336.6 to 339.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
130028	340.0 to 349.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
130029	351.9 to 352.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: S *side of* **TOLEDO WAY** *Starting at:* **SAN SEBASTIAN WAY** **$104,527.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091321	TOLEDO WAY	SEVILLA ST	SAN SEBASTIAN WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130105	0.3 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
130106	6.5 to 8.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
130107	10.6 to 14.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
130108	14.7 to 19.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
130122	20.6 to 36.3 feet	Key Note Segment		5 ft	78			
130109	36.8 to 38.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
130110	43.1 to 48.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
130123	48.0 to 61.6 feet	Key Note Segment		5 ft	68			
130096	52.5 to 53.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
130111	62.3 to 68.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	31	SF	$40	**$1,220**
130097	66.7 to 67.7 feet	**Vertical Change**	.72"	5 ft	5	REF		
130112	69.7 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
130113	83.3 to 104.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
130098	97.5 to 98.5 feet	**Vertical Change**	-.49"	5 ft	5	REF		
130099	104.0 to 105.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
130114	107.4 to 113.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
130100	115.0 to 116.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130115	116.0 to 117.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
130116	119.5 to 121.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
130124	121.8 to 138.7 feet	Key Note Segment		5 ft	84			
130117	138.7 to 146.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	38	SF	$40	**$1,520**
130101	140.7 to 141.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
130102	147.5 to 148.5 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
130125	147.9 to 162.0 feet	Key Note Segment		5 ft	71			
130103	161.8 to 162.8 feet	**Vertical Change**	1.38"	5 ft	5	REF		
130118	162.0 to 164.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$440**
130104	166.3 to 167.3 feet	**Vertical Change**	.46"	5 ft	5	REF		
130119	166.7 to 169.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091321	TOLEDO WAY	SEVILLA ST	SAN SEBASTIAN WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130120	172.3 to 189.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
130121	189.6 to 190.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **TOLEDO WAY** *Starting at:* **SEVILLA ST** **$54,975.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091239	TOLUCA	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129447	3.1 to 9.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
129448	12.3 to 26.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
129389	25.7 to 26.7 feet	**Vertical Change**	.37"	5 ft	5	REF		
129503	26.3 to 44.7 feet	Key Note Segment		5 ft	92			
129390	30.0 to 31.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
129391	44.9 to 45.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
129449	47.8 to 51.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
129392	51.4 to 52.4 feet	**Vertical Change**	.52"	5 ft	5	SF	$75	**$375**
129504	53.0 to 69.9 feet	Key Note Segment		5 ft	85			
129394	65.9 to 66.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129450	71.9 to 75.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
129451	76.8 to 77.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
129452	78.4 to 79.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
129453	83.8 to 85.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
129454	87.4 to 89.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
129455	90.6 to 94.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
129456	95.3 to 105.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
129457	107.2 to 109.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	11	SF	$120	**$1,260**
129458	109.5 to 114.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
129459	121.9 to 125.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,920**
129505	129.3 to 148.0 feet	Key Note Segment		5 ft	93			
129395	143.9 to 144.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
129396	148.2 to 149.2 feet	**Vertical Change**	.66"	5 ft	5	REF		
129460	150.1 to 154.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,460**
129397	152.7 to 153.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
129506	154.7 to 173.8 feet	Key Note Segment		5 ft	96			
129398	155.5 to 156.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129461	174.4 to 179.2 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	24	SF	$40	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091239	TOLUCA	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129462	181.3 to 184.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,800**
129399	181.6 to 182.6 feet	**Vertical Change**	2.82"	5 ft	5	REF		
129463	184.8 to 203.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	92	SF	$120	**$11,040**
129464	205.9 to 216.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	55	SF	$120	**$6,600**
129465	216.9 to 218.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
129466	219.9 to 226.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,140**
129467	226.8 to 232.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
129507	232.2 to 251.5 feet	Key Note Segment		5 ft	97			
129400	245.4 to 248.7 feet	**Vertical Change**	.26"	5 ft	17	REF		
129401	251.6 to 252.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129468	253.3 to 257.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
129508	258.2 to 277.7 feet	Key Note Segment		5 ft	98			
129469	278.9 to 282.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
129470	283.1 to 311.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	143	SF	$120	**$17,220**
129471	312.1 to 321.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,460**
129472	321.2 to 322.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
129473	322.6 to 323.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
129474	323.8 to 329.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,300**
129403	329.3 to 330.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
129475	330.8 to 335.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
129509	335.3 to 354.5 feet	Key Note Segment		5 ft	96			
129404	337.8 to 338.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
129405	340.1 to 341.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129476	357.9 to 361.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	17	SF	$120	**$2,040**
129510	361.8 to 380.8 feet	Key Note Segment		5 ft	95			
129406	376.3 to 377.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
129477	383.8 to 397.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	69	SF	$120	**$8,220**
129478	397.7 to 404.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091239	TOLUCA	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129407	398.3 to 399.3 feet	Vertical Change	.28"	5 ft	5	REF		
129479	404.8 to 408.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	$1,920
129408	410.8 to 411.8 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
129480	416.6 to 417.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
129481	419.8 to 421.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
129409	422.6 to 425.9 feet	Vertical Change	.28"	5 ft	17	LF	$75	$1,238
129482	426.7 to 430.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
129511	439.6 to 459.1 feet	Key Note Segment		5 ft	98			
129410	439.9 to 440.9 feet	Vertical Change	.31"	5 ft	5	REF		
129411	456.6 to 457.6 feet	Vertical Change	-.27"	5 ft	5	REF		
129483	461.9 to 463.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
129412	465.6 to 466.6 feet	Vertical Change	.79"	5 ft	5	SF	$75	$375
129512	465.7 to 484.9 feet	Key Note Segment		5 ft	96			
129413	467.7 to 473.1 feet	Vertical Change	.44"	5 ft	27	REF		
129415	484.7 to 485.7 feet	Vertical Change	.3"	5 ft	5	REF		
129484	486.8 to 495.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,460
129416	489.5 to 490.5 feet	Vertical Change	-.33"	5 ft	5	REF		
129485	498.5 to 517.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	$11,460
129486	520.2 to 522.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
129487	525.2 to 526.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$780
129417	525.5 to 526.5 feet	Vertical Change	-.27"	5 ft	5	REF		
129488	526.5 to 530.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
129489	533.0 to 538.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	$3,540
129490	538.9 to 540.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
129513	542.0 to 561.1 feet	Key Note Segment		5 ft	96			
129418	555.0 to 556.0 feet	Vertical Change	.32"	5 ft	5	REF		
129514	568.5 to 588.1 feet	Key Note Segment		5 ft	98			
129419	569.0 to 570.0 feet	Vertical Change	.68"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091239	TOLUCA	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129420	579.4 to 582.6 feet	Vertical Change	-.26"	5 ft	16	REF		
129421	585.8 to 586.8 feet	Vertical Change	.29"	5 ft	5	REF		
129491	590.2 to 608.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**
129423	610.3 to 611.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
129492	611.4 to 626.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,940**
129424	614.5 to 615.5 feet	Vertical Change	.27"	5 ft	5	REF		
129425	621.1 to 622.1 feet	Vertical Change	.37"	5 ft	5	REF		
129493	626.7 to 636.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
129426	627.4 to 630.6 feet	Vertical Change	.4"	5 ft	16	REF		
129427	633.9 to 637.1 feet	Vertical Change	.26"	5 ft	16	REF		
129494	637.8 to 644.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
129428	638.2 to 639.2 feet	Vertical Change	-.3"	5 ft	5	REF		
129429	642.3 to 643.3 feet	Vertical Change	.33"	5 ft	5	REF		
129515	645.8 to 665.6 feet	Key Note Segment		5 ft	99			
129432	665.7 to 671.3 feet	Vertical Change	.38"	5 ft	28	REF		
129495	666.4 to 671.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	25	SF	$40	**$980**
129516	672.6 to 691.7 feet	Key Note Segment		5 ft	96			
129433	676.8 to 677.8 feet	Vertical Change	.28"	5 ft	5	REF		
129434	685.2 to 688.4 feet	Vertical Change	.27"	5 ft	16	REF		
129496	692.8 to 704.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
129435	694.7 to 695.7 feet	Vertical Change	-.27"	5 ft	5	REF		
129436	703.3 to 704.3 feet	Vertical Change	.29"	5 ft	5	REF		
129497	704.6 to 719.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
129438	713.9 to 714.9 feet	Vertical Change	.29"	5 ft	5	REF		
129498	719.8 to 727.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
129439	722.6 to 723.6 feet	Vertical Change	.4"	5 ft	5	REF		
129499	731.2 to 749.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,920**
129440	739.6 to 740.6 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091239	TOLUCA	SEGOVIA CT	LAGUNA WAY	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129517	749.4 to 768.8 feet	Key Note Segment		5 ft	97			
129441	752.4 to 753.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
129442	767.3 to 768.3 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129443	771.4 to 772.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
129500	772.2 to 774.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
129518	775.6 to 794.9 feet	Key Note Segment		5 ft	97			
129501	796.1 to 804.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
129502	804.5 to 819.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
129444	808.4 to 809.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
129445	811.4 to 812.4 feet	**Vertical Change**	.63"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TOLUCA** *Starting at:* **SEGOVIA CT** **$226,437.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091246	TOLUCA WAY	1347 TOLUCA WAY	SEGOVIA CT	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129603	0.0 to 11.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
129604	11.1 to 21.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
129605	23.6 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
129645	25.8 to 44.3 feet	Key Note Segment		5 ft	93			
129563	40.4 to 41.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
129606	45.3 to 50.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
129646	50.9 to 69.8 feet	Key Note Segment		5 ft	95			
129564	53.4 to 54.4 feet	**Vertical Change**	3.48"	5 ft	5	REF		
129565	58.0 to 59.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129566	62.2 to 63.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
129567	72.8 to 73.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129607	73.8 to 88.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
129568	74.8 to 75.8 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129569	80.8 to 81.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
129608	90.4 to 92.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
129570	91.5 to 92.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
129609	92.9 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
129610	99.0 to 100.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129611	108.1 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
129612	124.5 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
129647	130.2 to 148.0 feet	Key Note Segment		5 ft	89			
129571	132.7 to 133.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
129572	142.5 to 143.5 feet	**Vertical Change**	.36"	5 ft	5	REF		
129573	148.4 to 149.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
129613	149.3 to 155.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
129648	156.1 to 173.9 feet	Key Note Segment		5 ft	89			
129574	158.8 to 159.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
129614	174.1 to 175.1 feet	**Cross Slope (Driveway)**	9.0-10.0%	5 ft	5	SF	$40	**$200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091246	TOLUCA WAY	1347 TOLUCA WAY	SEGOVIA CT	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129615	175.8 to 195.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	98	SF	$120	**$11,700**
129577	190.6 to 191.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
129616	199.4 to 204.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
129617	205.2 to 222.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	85	SF	$120	**$10,140**
129618	222.1 to 223.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,020**
129619	224.3 to 227.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
129620	229.3 to 230.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
129578	229.7 to 230.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
129649	233.5 to 251.5 feet	Key Note Segment		5 ft	90			
129621	254.0 to 255.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**
129622	256.9 to 258.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
129650	258.9 to 277.4 feet	Key Note Segment		5 ft	93			
129580	275.9 to 276.9 feet	**Vertical Change**	.42"	5 ft	5	REF		
129623	281.0 to 282.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
129624	282.8 to 299.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	85	SF	$120	**$10,260**
129582	286.7 to 287.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
129625	299.9 to 301.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
129626	302.5 to 312.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$6,000**
129627	314.7 to 316.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
129628	316.0 to 322.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
129629	322.4 to 333.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	54	SF	$120	**$6,480**
129585	323.8 to 324.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
129586	328.1 to 329.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
129630	333.2 to 335.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
129651	336.0 to 354.8 feet	Key Note Segment		5 ft	94			
129587	339.1 to 340.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
129588	355.7 to 356.7 feet	**Vertical Change**	.67"	5 ft	5	REF		
129631	356.1 to 361.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091246	TOLUCA WAY	1347 TOLUCA WAY	SEGOVIA CT	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129589	359.6 to 360.6 feet	Vertical Change	.31"	5 ft	5	REF		
129652	362.1 to 380.4 feet	Key Note Segment		5 ft	92			
129590	362.4 to 363.4 feet	Vertical Change	-.29"	5 ft	5	REF		
129591	381.3 to 382.3 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
129632	382.4 to 394.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	$7,080
129593	392.6 to 393.6 feet	Vertical Change	-.28"	5 ft	5	REF		
129633	398.0 to 415.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	87	SF	$120	$10,440
129594	401.7 to 402.7 feet	Vertical Change	.31"	5 ft	5	REF		
129634	415.4 to 418.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	$2,040
129595	416.7 to 417.7 feet	Vertical Change	.28"	5 ft	5	REF		
129635	420.7 to 426.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,360
129596	425.3 to 426.3 feet	Vertical Change	.3"	5 ft	5	REF		
129636	427.3 to 429.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	$1,020
129637	429.4 to 431.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,020
129638	432.2 to 435.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	$1,740
129639	437.3 to 439.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	$1,080
129653	439.1 to 456.4 feet	Key Note Segment		5 ft	87			
129597	440.6 to 443.3 feet	Vertical Change	.32"	5 ft	14	REF		
129640	459.4 to 462.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	$2,040
129654	465.0 to 484.3 feet	Key Note Segment		5 ft	97			
129598	465.9 to 466.9 feet	Vertical Change	-.47"	5 ft	5	REF		
129599	478.3 to 479.3 feet	Vertical Change	.33"	5 ft	5	REF		
129600	482.0 to 483.0 feet	Vertical Change	.26"	5 ft	5	REF		
129641	484.9 to 496.2 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	57	SF	$120	$6,780
129601	486.6 to 487.6 feet	Vertical Change	.46"	5 ft	5	REF		
129642	496.2 to 504.2 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	40	SF	$120	$4,800
129602	503.9 to 504.9 feet	Vertical Change	.3"	5 ft	5	REF		
129643	504.2 to 506.3 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	11	SF	$120	$1,260

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091246	TOLUCA WAY	1347 TOLUCA WAY	SEGOVIA CT	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129644	507.2 to 508.3 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **TOLUCA WAY** *Starting at:* **1347 TOLUCA WAY** **$152,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091242	TOLUCA WAY	LAGUNA WAY	1333 TOLUCA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129537	1.9 to 10.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
129538	10.6 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
129539	17.0 to 18.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
129540	18.1 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
129557	25.6 to 45.3 feet	Key Note Segment		5 ft	99			
129519	26.5 to 27.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
129520	44.1 to 45.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
129558	52.0 to 70.3 feet	Key Note Segment		5 ft	92			
129521	52.6 to 53.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
129522	55.0 to 56.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
129523	70.9 to 71.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
129541	72.5 to 73.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
129524	72.7 to 73.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
129542	78.2 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
129543	90.8 to 104.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
129544	107.9 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
129545	120.7 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
129559	129.7 to 148.8 feet	Key Note Segment		5 ft	96			
129525	134.3 to 135.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
129526	144.8 to 145.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
129546	152.2 to 154.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
129560	155.4 to 174.7 feet	Key Note Segment		5 ft	97			
129527	166.4 to 171.6 feet	**Vertical Change**	.29"	5 ft	26	REF		
129547	176.2 to 180.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
129548	182.2 to 187.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
129549	187.0 to 200.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
129529	188.5 to 189.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
129550	203.8 to 215.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091242	TOLUCA WAY	LAGUNA WAY	1333 TOLUCA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
129551	216.0 to 225.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
129530	216.2 to 217.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
129552	227.9 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
129561	233.1 to 251.6 feet	Key Note Segment		5 ft	93			
129531	248.2 to 249.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
129553	255.7 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
129562	258.7 to 277.8 feet	Key Note Segment		5 ft	96			
129532	261.3 to 264.4 feet	**Vertical Change**	.29"	5 ft	15	REF		
129534	277.0 to 278.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
129554	279.7 to 289.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
129535	290.3 to 291.3 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
129536	292.0 to 297.2 feet	**Vertical Change**	.31"	5 ft	26	LF	$75	**$1,950**
129555	293.6 to 303.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,940**
129556	303.5 to 304.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: E *side of* **TOLUCA WAY** *Starting at:* **LAGUNA WAY** **$74,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091255	TORONADO DR	1209 TORONADO DR	W SHERWOOD WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53996	0.0 to 1.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
53997	1.7 to 7.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
54013	7.5 to 21.8 feet	Key Note Segment		4 ft	57			
53987	8.4 to 9.4 feet	**Vertical Change**	.31"	4 ft	4	REF		
53988	22.2 to 23.2 feet	**Vertical Change**	.49"	4 ft	4	REF		
53989	55.6 to 56.6 feet	**Vertical Change**	.44"	4 ft	4	LF	$75	**$300**
53990	62.8 to 63.8 feet	**Vertical Change**	.49"	4 ft	4	LF	$75	**$300**
53998	69.5 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	49	SF	$120	**$5,904**
53999	81.8 to 86.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	**$2,448**
54014	87.2 to 101.8 feet	Key Note Segment		4 ft	58			
54000	101.8 to 103.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	6	SF	$40	**$224**
54001	106.8 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
54015	113.2 to 127.2 feet	Key Note Segment		4 ft	56			
54002	150.7 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	41	SF	$120	**$4,944**
54003	162.0 to 174.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	50	SF	$120	**$6,048**
54004	175.1 to 176.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
53991	175.5 to 176.5 feet	**Vertical Change**	.41"	4 ft	4	REF		
54005	179.7 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
53992	183.2 to 184.2 feet	**Vertical Change**	-.27"	4 ft	4	LF	$75	**$300**
54006	186.8 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,880**
54016	193.5 to 207.2 feet	Key Note Segment		4 ft	55			
54007	207.4 to 208.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	6	SF	$40	**$224**
53993	207.9 to 208.9 feet	**Vertical Change**	.81"	4 ft	4	REF		
53994	214.0 to 215.0 feet	**Vertical Change**	-1.83"	4 ft	4	SF	$75	**$300**
53995	215.7 to 216.7 feet	**Vertical Change**	.63"	4 ft	4	SF	$75	**$300**
54017	219.4 to 233.5 feet	Key Note Segment		4 ft	56			
54008	235.9 to 242.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,072**
54009	246.2 to 247.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091255	TORONADO DR	1209 TORONADO DR	W SHERWOOD WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54010	249.4 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
54011	255.0 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
54012	262.3 to 265.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
54018	263.1 to 264.3 feet		5.0-6.0%	4 ft	5			

TOTAL COST FOR: E *side of* **TORONADO DR** *Starting at:* **1209 TORONADO DR** **$39,868.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091252	TORONADO DR	E CLEVELAND AVE	1205 TORONADO DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53952	1.6 to 3.5 feet	Cross Slope (PAR)	8.0-9.0%	4 ft	8	SF	$120	**$912**
53953	4.4 to 6.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	9	SF	$120	**$1,056**
53944	8.3 to 9.3 feet	**Vertical Change**	.93"	4 ft	4	SF	$75	**$300**
53954	11.8 to 18.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	27	SF	$120	**$3,216**
53985	18.6 to 19.9 feet		5.0-6.0%	4 ft	5			
53945	19.4 to 20.4 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**
53946	21.8 to 22.8 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
53976	27.6 to 43.3 feet	Key Note Segment		4 ft	63			
53955	44.5 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
53977	55.3 to 68.8 feet	Key Note Segment		4 ft	54			
53956	68.8 to 72.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	16	SF	$40	**$624**
53947	80.9 to 81.9 feet	**Vertical Change**	-.63"	4 ft	4	SF	$75	**$300**
53957	84.6 to 94.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	41	SF	$120	**$4,944**
53958	98.7 to 124.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	104	SF	$120	**$12,480**
53959	124.8 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
53978	134.2 to 148.2 feet	Key Note Segment		4 ft	56			
53960	148.2 to 152.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	16	SF	$40	**$640**
53961	154.3 to 159.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
53979	159.3 to 173.3 feet	Key Note Segment		4 ft	56			
53962	173.3 to 185.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	47	SF	$40	**$1,872**
53963	187.2 to 191.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,064**
53964	193.9 to 194.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
53965	196.3 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
53948	204.0 to 205.0 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
53966	225.0 to 237.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
53980	237.7 to 254.4 feet	Key Note Segment		4 ft	67			
53967	254.4 to 261.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	29	SF	$40	**$1,168**
53981	265.7 to 280.2 feet	Key Note Segment		4 ft	58			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108091252	TORONADO DR	E CLEVELAND AVE	1205 TORONADO DR	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53968	280.4 to 282.1 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	7	SF	$40	$272
53969	284.8 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,920
53970	297.8 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,400
53971	314.8 to 322.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	$3,504
53972	324.3 to 339.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	$7,440
53973	341.9 to 343.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$672
53982	344.4 to 358.2 feet	Key Note Segment		4 ft	55			
53974	361.9 to 367.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	$2,832
53983	371.0 to 385.1 feet	Key Note Segment		4 ft	56			
53949	385.8 to 386.8 feet	Vertical Change	.28"	4 ft	4	LF	$75	$300
53950	420.2 to 421.2 feet	Vertical Change	1.16"	4 ft	4	SF	$75	$300
53951	449.0 to 450.0 feet	Vertical Change	1.34"	4 ft	4	SF	$75	$300
53984	450.3 to 465.0 feet	Key Note Segment		4 ft	59			
53975	466.4 to 467.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	$576
53986	493.0 to 494.3 feet		5.0-6.0%	4 ft	5			

TOTAL COST FOR: E *side of* **TORONADO DR** *Starting at:* **E CLEVELAND AVE** **$66,208.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091246	TORONADO DR	W SHERWOOD WAY	E CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53883	11.1 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,448**
53927	29.6 to 43.3 feet	Key Note Segment		4 ft	55			
53884	45.2 to 53.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	33	SF	$120	**$3,936**
53928	53.4 to 67.8 feet	Key Note Segment		4 ft	58			
53885	68.3 to 74.3 feet	Cross Slope (Driveway)	5.0-6.0%	4 ft	24	SF	$40	**$960**
53861	74.8 to 75.8 feet	Vertical Change	-.5"	4 ft	4	REF		
53886	75.3 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	70	SF	$120	**$8,400**
53862	121.5 to 122.5 feet	Vertical Change	-.3"	4 ft	4	REF		
53887	121.8 to 124.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
53941	122.6 to 123.7 feet		7.0-8.0%	4 ft	4			
53888	125.3 to 131.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
53889	131.1 to 132.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$816**
53929	133.0 to 147.2 feet	Key Note Segment		4 ft	57			
53890	147.3 to 149.7 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	10	SF	$40	**$384**
53891	149.7 to 158.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,368**
53930	159.5 to 174.3 feet	Key Note Segment		4 ft	59			
53863	174.6 to 175.6 feet	Vertical Change	-.29"	4 ft	4	REF		
53892	175.0 to 176.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
53893	192.1 to 195.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
53864	194.1 to 195.1 feet	Vertical Change	-1.06"	4 ft	4	REF		
53894	195.3 to 207.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	50	SF	$120	**$5,952**
53895	210.2 to 223.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	51	SF	$120	**$6,144**
53896	223.0 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
53897	228.4 to 231.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,344**
53898	231.8 to 233.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
53899	236.6 to 238.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
53931	238.8 to 252.8 feet	Key Note Segment		4 ft	56			
53900	252.8 to 254.9 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	8	SF	$40	**$336**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091246	TORONADO DR	W SHERWOOD WAY	E CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53901	258.3 to 268.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
53865	259.2 to 260.2 feet	**Vertical Change**	.6"	4 ft	4	REF		
53932	291.3 to 305.3 feet	Key Note Segment		4 ft	56			
53866	292.0 to 293.0 feet	**Vertical Change**	-.55"	4 ft	4	REF		
53902	305.3 to 315.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	41	SF	$40	**$1,648**
53867	305.8 to 306.8 feet	**Vertical Change**	-.29"	4 ft	4	REF		
53933	315.6 to 329.9 feet	Key Note Segment		4 ft	57			
53903	331.2 to 354.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	92	SF	$120	**$10,992**
53904	357.8 to 366.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
53868	364.0 to 365.0 feet	**Vertical Change**	-.53"	4 ft	4	REF		
53905	371.0 to 377.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,312**
53906	381.1 to 395.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,816**
53934	395.6 to 409.9 feet	Key Note Segment		4 ft	57			
53870	410.4 to 411.4 feet	**Vertical Change**	.31"	4 ft	4	REF		
53871	416.6 to 417.6 feet	**Vertical Change**	.63"	4 ft	4	SF	$75	**$300**
53907	419.8 to 421.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
53935	421.5 to 435.3 feet	Key Note Segment		4 ft	55			
53908	435.3 to 445.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	40	SF	$40	**$1,600**
53872	436.0 to 437.0 feet	**Vertical Change**	.26"	4 ft	4	REF		
53909	445.4 to 459.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	56	SF	$120	**$6,768**
53910	463.6 to 484.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	83	SF	$120	**$9,984**
53873	471.6 to 472.6 feet	**Vertical Change**	.63"	4 ft	4	REF		
53911	484.4 to 486.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
53912	488.5 to 498.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,800**
53874	521.9 to 522.9 feet	**Vertical Change**	.33"	4 ft	4	REF		
53913	522.8 to 526.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,632**
53936	527.3 to 540.8 feet	Key Note Segment		4 ft	54			
53914	540.8 to 569.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	115	SF	$40	**$4,608**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108091246	TORONADO DR	W SHERWOOD WAY	E CLEVELAND AVE	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
53875	541.2 to 542.2 feet	Vertical Change	-.27"	4 ft	4	REF		
53876	554.1 to 555.1 feet	Vertical Change	-.29"	4 ft	4	REF		
53915	574.6 to 575.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
53916	576.2 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
53877	586.4 to 587.4 feet	Vertical Change	.87"	4 ft	4	SF	$75	**$300**
53942	592.3 to 593.6 feet		5.0-6.0%	4 ft	5			
53878	592.9 to 593.9 feet	Vertical Change	-2.38"	4 ft	4	SF	$75	**$300**
53917	596.1 to 605.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	38	SF	$120	**$4,608**
53937	605.8 to 620.3 feet	Key Note Segment		4 ft	58			
53918	621.1 to 630.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,464**
53938	631.2 to 645.3 feet	Key Note Segment		4 ft	56			
53919	646.4 to 653.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	29	SF	$120	**$3,456**
53920	654.3 to 662.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
53879	658.2 to 659.2 feet	Vertical Change	.33"	4 ft	4	REF		
53881	692.5 to 693.5 feet	Vertical Change	.32"	4 ft	4	LF	$75	**$300**
53921	694.3 to 698.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
53943	698.5 to 700.2 feet		6.0-7.0%	4 ft	7			
53922	704.1 to 710.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	**$2,976**
53939	710.8 to 725.2 feet	Key Note Segment		4 ft	58			
53923	725.2 to 726.6 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	6	SF	$40	**$224**
53924	727.0 to 728.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
53940	735.7 to 750.2 feet	Key Note Segment		4 ft	58			
53882	742.0 to 743.0 feet	Vertical Change	1.11"	4 ft	4	REF		
53925	758.0 to 761.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
53926	768.8 to 777.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: W *side of* **TORONADO DR** *Starting at:* **W SHERWOOD WAY** **$145,024.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202031213	TORRES WAY	809 TORRES WAY	821 TORRES WAY	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119967	1.2 to 19.3 feet	Key Note Segment		5 ft	91			
119958	2.7 to 3.7 feet	Vertical Change	.26"	5 ft	5	REF		
119959	19.9 to 20.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
119961	25.8 to 28.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
119962	31.2 to 38.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
119963	42.4 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
119968	43.7 to 56.8 feet	Key Note Segment		5 ft	66			
119964	58.9 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
119965	67.4 to 69.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
119966	70.5 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
119960	75.4 to 76.4 feet	Vertical Change	-.33"	5 ft	5	REF		
119969	80.7 to 81.7 feet	Protruding Object	60"	5 ft	5	JOB	$99	**$99**

TOTAL COST FOR: E *side of* **TORRES WAY** *Starting at:* **809 TORRES WAY** **$19,614.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031217	TORRES WAY	812 TORRES WAY	812 TORRES WAY	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119978	1.3 to 18.3 feet	Key Note Segment		5 ft	85			
119977	31.3 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
119976	37.9 to 38.9 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TORRES WAY** *Starting at:* **812 TORRES WAY** **$5,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202031215	TORRES WAY	820 TORRES WAY	820 TORRES WAY	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119971	0.5 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
119972	3.5 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$4,020**
119973	12.7 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
119974	15.5 to 24.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
119970	27.3 to 28.3 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
119975	28.4 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: W *side of* **TORRES WAY** *Starting at:* **820 TORRES WAY** **$15,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221008	TOSCHI DR	1115 TOSCHI DR	PEAR TREE DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80649	0.8 to 4.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
80650	9.8 to 12.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
80651	13.3 to 15.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
80656	16.0 to 34.8 feet	Key Note Segment		5 ft	94			
80652	45.2 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
80653	56.1 to 57.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
80654	59.8 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80648	63.2 to 64.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
80657	63.8 to 81.8 feet	Key Note Segment		5 ft	90			
80655	81.8 to 82.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$220**

TOTAL COST FOR: E *side of* **TOSCHI DR** *Starting at:* **1115 TOSCHI DR** **$9,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110221152	TOSCHI DR	ALMOND AVE	PEAR TREE DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81617	0.5 to 13.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
81612	0.9 to 1.9 feet	**Vertical Change**	-.39"	5 ft	5	REF		
81618	13.6 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81613	16.5 to 17.5 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
81619	22.8 to 29.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
81614	23.7 to 24.7 feet	**Vertical Change**	.69"	5 ft	5	REF		
81615	29.7 to 30.7 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
81616	38.5 to 39.5 feet	**Vertical Change**	-.82"	5 ft	5	SF	$75	**$375**
81620	42.9 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
81621	54.4 to 57.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: W *side of* **TOSCHI DR** *Starting at:* **ALMOND AVE** **$17,085.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221007	TOSCHI DR	APPLE TREE DR	1119 TOSCHI DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80617	1.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
80618	5.2 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
80619	12.9 to 20.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
80620	21.4 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80606	22.0 to 23.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
80640	22.8 to 42.4 feet	Key Note Segment		5 ft	98			
80621	43.4 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
80607	43.5 to 44.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
80608	47.4 to 51.2 feet	**Vertical Change**	.27"	5 ft	19	LF	$75	**$1,425**
80641	49.0 to 68.1 feet	Key Note Segment		5 ft	95			
80622	70.3 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
80623	76.5 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
80609	86.1 to 87.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
80624	89.8 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
80642	108.5 to 129.4 feet	Key Note Segment		5 ft	105			
80610	110.3 to 111.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
80611	127.9 to 128.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
80612	129.8 to 130.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
80625	131.0 to 132.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
80643	135.2 to 154.4 feet	Key Note Segment		5 ft	96			
80613	144.9 to 145.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
80626	159.0 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
80614	164.4 to 165.4 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
80627	170.7 to 177.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
80628	179.8 to 183.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
80629	183.4 to 187.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
80615	184.7 to 185.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
80630	189.2 to 193.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221007	TOSCHI DR	APPLE TREE DR	1119 TOSCHI DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80644	194.9 to 214.9 feet	Key Note Segment		5 ft	100			
80631	215.5 to 217.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
80632	219.3 to 221.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
80645	221.6 to 240.1 feet	Key Note Segment		5 ft	93			
80616	237.9 to 238.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
80633	242.3 to 247.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
80634	248.8 to 254.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
80635	258.8 to 261.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
80636	263.6 to 270.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
80637	270.4 to 278.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
80638	281.3 to 282.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
80646	282.4 to 300.7 feet	Key Note Segment		5 ft	92			
80639	302.7 to 304.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
80647	307.6 to 326.4 feet	Key Note Segment		5 ft	94			

TOTAL COST FOR: E *side of* **TOSCHI DR** *Starting at:* **APPLE TREE DR** **$59,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110916	TOSCHI DR	APPLE TREE DR	ORANGE TREE DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89838	4.7 to 27.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
89839	29.8 to 49.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,520**
89840	53.5 to 73.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	98	SF	$120	**$11,700**
89835	62.2 to 63.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		
89841	76.8 to 88.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
89842	90.6 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,860**
89836	105.1 to 106.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
89843	124.1 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
89837	147.8 to 148.8 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TOSCHI DR** *Starting at:* **APPLE TREE DR** **$75,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110949	TOSCHI DR	CHERRY TREE DR	APPLE TREE DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90172	0.0 to 11.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
90173	15.3 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
90162	20.7 to 21.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
90190	22.3 to 41.3 feet	Key Note Segment		5 ft	95			
90174	44.4 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
90191	48.2 to 67.2 feet	Key Note Segment		5 ft	95			
90175	69.1 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
90163	69.2 to 70.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
90176	86.0 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
90177	97.6 to 104.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
90192	111.7 to 129.9 feet	Key Note Segment		5 ft	91			
90178	135.3 to 136.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
90193	136.4 to 156.7 feet	Key Note Segment		5 ft	101			
90179	163.2 to 165.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
90180	169.6 to 175.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
90164	171.0 to 172.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
90181	182.8 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
90194	200.0 to 220.8 feet	Key Note Segment		5 ft	104			
90165	201.0 to 202.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
90182	220.8 to 226.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	26	SF	$40	**$1,040**
90195	226.0 to 245.8 feet	Key Note Segment		5 ft	99			
90166	229.5 to 230.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
90167	236.1 to 237.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
90168	242.9 to 243.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
90183	252.9 to 265.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
90184	268.5 to 275.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
90185	275.0 to 286.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
90186	287.1 to 288.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201110949	TOSCHI DR	CHERRY TREE DR	APPLE TREE DR	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
90196	288.2 to 308.7 feet	Key Note Segment		5 ft	103			
90187	310.2 to 311.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
90188	313.5 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
90197	315.3 to 336.7 feet	Key Note Segment		5 ft	107			
90169	325.1 to 326.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
90170	331.8 to 332.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
90189	340.3 to 359.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	98	SF	$120	**$11,760**
90198	357.4 to 359.9 feet		5.0-6.0%	5 ft	13			
90199	357.4 to 359.9 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **TOSCHI DR** *Starting at:* **CHERRY TREE DR** **$67,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110924	TOSCHI DR	ORANGE TREE DR	CHERRY TREE DR	25

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89895	7.2 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
89896	27.2 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
89897	40.2 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
89898	54.9 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
89899	68.4 to 70.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
89892	78.9 to 79.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
89903	87.2 to 105.2 feet	Key Note Segment		5 ft	90			
89900	111.1 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
89901	115.4 to 119.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
89893	118.6 to 119.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
89902	125.7 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
89894	133.1 to 134.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
89904	144.9 to 146.9 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: W *side of* **TOSCHI DR** *Starting at:* **ORANGE TREE DR** **$23,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110908	TOSCHI DR	PEANUT DR	APPLE TREE DR	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89757	0.0 to 8.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
89758	9.6 to 60.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	252	SF	$120	**$30,240**
89755	22.9 to 23.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
89759	60.0 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
89760	63.9 to 86.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,620**
89761	86.6 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
89762	90.8 to 109.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,100**
89763	110.8 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
89764	127.4 to 147.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,180**
89756	147.6 to 148.6 feet	**Vertical Change**	1.37"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TOSCHI DR** *Starting at:* **PEANUT DR** **$86,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110221011	TOSCHI DR	PEAR TREE DR	ALMOND AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
80683	9.5 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
80677	17.6 to 20.4 feet	**Vertical Change**	.26"	5 ft	14	LF	$75	**$1,050**
80684	20.6 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
80685	23.6 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
80678	31.5 to 35.2 feet	**Vertical Change**	.44"	5 ft	19	REF		
80686	31.8 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
80687	47.0 to 48.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
80679	49.0 to 52.6 feet	**Vertical Change**	.37"	5 ft	18	LF	$75	**$1,350**
80688	54.3 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
80680	57.8 to 58.8 feet	**Vertical Change**	-.35"	5 ft	5	LF	$75	**$375**
80689	60.0 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
80681	67.1 to 70.1 feet	**Vertical Change**	.32"	5 ft	15	LF	$75	**$1,125**
80682	72.1 to 73.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
80690	80.6 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**

TOTAL COST FOR: E *side of* **TOSCHI DR** *Starting at:* **PEAR TREE DR** **$19,215.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201110901	TOSCHI DR	PEAR TREE DR	PEANUT DR	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
89681	0.8 to 22.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,780**
89682	22.8 to 30.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
89676	29.2 to 30.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
89683	32.7 to 54.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
89677	38.9 to 39.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
89678	47.6 to 48.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
89684	58.0 to 80.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
89685	84.8 to 95.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
89686	98.6 to 107.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
89687	107.1 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
89679	109.0 to 110.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
89688	111.0 to 113.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
89689	117.3 to 133.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,900**
89680	121.8 to 122.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
89690	134.4 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
89691	138.2 to 146.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**

TOTAL COST FOR: W *side of* **TOSCHI DR** *Starting at:* **PEAR TREE DR** **$75,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201121004	TOSCHI DRIVE	DESERT RANCH WAY	MAPLE STREET	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94193	0.0 to 24.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
94204	25.8 to 45.8 feet	Key Note Segment		5 ft	100			
94186	35.6 to 36.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
94194	48.9 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
94205	53.4 to 74.1 feet	Key Note Segment		5 ft	103			
94195	74.3 to 75.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$220**
94196	76.7 to 78.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
94197	82.7 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
94198	89.4 to 92.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
94199	92.6 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
94187	97.8 to 98.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
94206	109.2 to 134.0 feet	Key Note Segment		5 ft	124			
94188	132.5 to 133.5 feet	**Vertical Change**	.43"	5 ft	5	REF		
94200	134.5 to 138.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	21	SF	$40	**$820**
94201	139.5 to 142.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
94189	142.5 to 143.5 feet	**Vertical Change**	.57"	5 ft	5	REF		
94202	145.6 to 152.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,260**
94203	152.8 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
94190	155.6 to 156.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
94207	168.7 to 191.8 feet	Key Note Segment		5 ft	116			
94191	189.9 to 190.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
94208	198.3 to 199.6 feet		5.0-6.0%	5 ft	7			
94192	200.6 to 201.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **TOSCHI DRIVE** *Starting at:* **DESERT RANCH WAY** **$39,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201121021	TOSCHI DRIVE	MAPLE STREET	DESERT RANCH WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
94340	0.8 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
94341	5.8 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
94342	8.8 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
94334	13.9 to 14.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
94343	24.7 to 50.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	131	SF	$120	**$15,660**
94335	26.5 to 27.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
94344	50.8 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
94345	62.9 to 63.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
94346	67.4 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
94336	68.3 to 69.3 feet	**Vertical Change**	1"	5 ft	5	REF		
94337	71.9 to 72.9 feet	**Vertical Change**	.68"	5 ft	5	REF		
94347	100.3 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
94338	100.5 to 101.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
94348	114.3 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
94349	122.8 to 126.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
94350	128.9 to 148.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	97	SF	$120	**$11,640**
94339	149.7 to 150.7 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W *side of* **TOSCHI DRIVE** *Starting at:* **MAPLE STREET** **$59,415.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091513	TOZER ST	1426 E YOSEMITE AVE	CLINTON ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130528	0.9 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	8	SF	$120	**$1,008**
130529	2.9 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,276**
130530	12.0 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	62	SF	$120	**$7,392**
130531	29.1 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	26	SF	$120	**$3,108**
130532	37.3 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	423	SF	$120	**$50,736**
130533	100.6 to 104.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	26	SF	$120	**$3,108**
130534	104.3 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	231	SF	$120	**$27,720**
130525	129.3 to 130.3 feet	**Vertical Change**	1.18"	7 ft	7	REF		
130535	140.5 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	286	SF	$120	**$34,356**
130526	158.1 to 159.1 feet	**Vertical Change**	-.3"	7 ft	7	REF		
130536	187.1 to 188.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	7	SF	$120	**$840**
130537	193.8 to 208.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	104	SF	$120	**$12,432**
130538	210.8 to 223.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	88	SF	$120	**$10,584**
130539	226.0 to 281.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	386	SF	$120	**$46,284**
130527	282.9 to 283.9 feet	**Vertical Change**	.31"	7 ft	7	LF	$75	**$525**
130540	285.5 to 310.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	175	SF	$120	**$21,000**
130541	315.1 to 316.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$924**
130542	320.6 to 323.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	19	SF	$120	**$2,268**
130543	336.4 to 351.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	107	SF	$120	**$12,852**
130544	353.8 to 357.1 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	23	SF	$120	**$2,772**
130545	358.3 to 360.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	15	SF	$120	**$1,848**

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **1426 E YOSEMITE AVE** **$243,033.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091510	TOZER ST	1490 E YOSEMITE AVE	1490 E YOSEMITE AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130519	0.0 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	13	SF	$120	**$1,596**
130520	6.6 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	67	SF	$120	**$8,064**
130521	37.0 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	87	SF	$120	**$10,416**
130522	53.1 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	131	SF	$120	**$15,708**
130523	76.6 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	72	SF	$120	**$8,652**
130524	89.8 to 108.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	133	SF	$120	**$15,960**

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **1490 E YOSEMITE AVE** **$60,396.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091508	TOZER ST	1490 TOZER ST	1490 TOZER ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130514	0.0 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	76	SF	$120	**$9,072**
130515	29.8 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	175	SF	$120	**$21,000**
130516	59.4 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	193	SF	$120	**$23,184**
130513	79.2 to 80.2 feet	**Vertical Change**	.93"	7 ft	7	REF		
130517	90.2 to 92.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	18	SF	$120	**$2,184**
130518	96.1 to 110.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	99	SF	$120	**$11,928**

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **1490 TOZER ST** **$67,368.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091535	TOZER ST	1502 E YOSEMITE AVE	1502 E YOSEMITE AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130634	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	9	SF	$120	**$1,092**
130631	2.1 to 3.1 feet	**Vertical Change**	.31"	7 ft	7	REF		
130635	2.9 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	52	SF	$120	**$6,216**
130636	28.5 to 41.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	89	SF	$120	**$10,668**
130637	44.5 to 49.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	33	SF	$120	**$3,948**
130638	49.2 to 83.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	242	SF	$120	**$28,980**
130632	52.2 to 53.2 feet	**Vertical Change**	.27"	7 ft	7	REF		
130639	83.7 to 87.2 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	25	SF	$120	**$2,940**
130633	84.8 to 85.8 feet	**Vertical Change**	.31"	7 ft	7	REF		

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **1502 E YOSEMITE AVE** **$53,844.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091536	TOZER ST	1502 E YOSEMITE AVE	E YOSEMITE AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130641	0.0 to 2.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	16	SF	$120	**$1,932**
130642	4.4 to 5.9 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	10	SF	$120	**$1,260**
130643	5.9 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	108	SF	$120	**$12,936**
130644	23.4 to 25.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	13	SF	$120	**$1,512**
130645	25.2 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	15	SF	$120	**$1,764**
130646	34.4 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	41	SF	$120	**$4,956**
130640	35.4 to 36.4 feet	**Vertical Change**	.4"	7 ft	7	REF		

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **1502 E YOSEMITE AVE** **$24,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091534	TOZER ST	1609 CLINTON ST	125 TOZER ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130615	3.5 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	78	SF	$120	**$9,408**
130616	30.2 to 64.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	241	SF	$120	**$28,896**
130617	72.6 to 99.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	188	SF	$120	**$22,512**
130630	99.4 to 118.0 feet	Key Note Segment		7 ft	130			
130618	118.8 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	177	SF	$120	**$21,252**
130619	146.6 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	115	SF	$120	**$13,776**
130620	165.9 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	217	SF	$120	**$26,040**
130621	199.3 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,260**
130622	208.1 to 214.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	46	SF	$120	**$5,460**
130612	209.8 to 210.8 feet	**Vertical Change**	1.88"	7 ft	7	REF		
130623	217.7 to 244.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	186	SF	$120	**$22,260**
130624	246.5 to 272.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	181	SF	$120	**$21,672**
130625	280.0 to 320.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	280	SF	$120	**$33,600**
130613	308.5 to 309.5 feet	**Vertical Change**	.29"	7 ft	7	REF		
130626	326.8 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	25	SF	$120	**$2,940**
130627	333.3 to 337.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,528**
130628	344.1 to 368.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	171	SF	$120	**$20,496**
130614	361.9 to 362.9 feet	**Vertical Change**	.33"	7 ft	7	REF		
130629	372.4 to 385.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	90	SF	$120	**$10,752**

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **1609 CLINTON ST** **$243,852.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091530	TOZER ST	1633 CLINTON ST	1633 CLINTON ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130600	0.1 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	8	SF	$120	**$924**
130601	3.9 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	55	SF	$120	**$6,636**
130602	28.8 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	15	SF	$120	**$1,848**
130603	31.0 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,276**
130604	37.8 to 44.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	47	SF	$120	**$5,628**
130605	48.3 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	50	SF	$120	**$5,964**
130606	58.0 to 59.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	13	SF	$120	**$1,596**
130607	63.3 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	46	SF	$120	**$5,544**
130608	73.8 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	38	SF	$120	**$4,536**
130609	81.5 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	11	SF	$120	**$1,260**
130610	86.7 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	97	SF	$120	**$11,676**
130611	103.3 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	78	SF	$120	**$9,408**

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **1633 CLINTON ST** **$58,296.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091529	TOZER ST	CLINTON ST	1633 CLINTON ST	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130596	3.4 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	56	SF	$120	**$6,720**
130594	10.4 to 11.4 feet	**Vertical Change**	.31"	7 ft	7	REF		
130597	28.8 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$1,008**
130598	35.6 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	74	SF	$120	**$8,904**
130595	47.6 to 48.6 feet	**Vertical Change**	.44"	7 ft	7	LF	$75	**$525**
130599	49.2 to 67.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	125	SF	$120	**$15,036**

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **CLINTON ST** **$32,193.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191001	TOZER ST	E ALMOND AVE	LADA AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72781	0.0 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
72774	2.7 to 3.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
72782	15.0 to 16.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
72783	18.4 to 31.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,560**
72784	36.2 to 41.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,420**
72785	44.4 to 46.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
72786	48.8 to 52.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
72787	54.8 to 159.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	523	SF	$120	**$62,700**
72775	71.0 to 72.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
72788	160.2 to 167.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	38	SF	$120	**$4,500**
72789	167.7 to 179.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
72790	182.8 to 184.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
72791	186.9 to 203.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,960**
72792	203.5 to 206.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
72793	206.1 to 209.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
72794	211.3 to 213.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
72795	214.0 to 223.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
72796	223.8 to 237.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
72797	239.5 to 240.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
72798	243.3 to 265.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
72799	266.4 to 274.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
72776	272.2 to 273.2 feet	**Vertical Change**	.29"	5 ft	5	REF		
72800	276.8 to 283.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
72801	283.7 to 287.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
72802	290.2 to 296.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
72803	296.8 to 303.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
72804	304.9 to 308.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
72805	310.3 to 320.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191001	TOZER ST	E ALMOND AVE	LADA AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72806	320.0 to 358.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	192	SF	$120	**$22,980**
72777	324.6 to 325.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
72778	355.4 to 356.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
72807	361.9 to 363.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
72808	367.6 to 371.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
72779	374.6 to 375.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
72809	375.1 to 388.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
72780	387.3 to 388.3 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **E ALMOND AVE** **$200,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091505	TOZER ST	E YOSEMITE AVE	1426 E YOSEMITE AVE	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130506	0.0 to 2.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	18	SF	$120	**$2,100**
130507	30.8 to 42.6 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	83	SF	$120	**$9,912**
130505	40.7 to 41.7 feet	**Vertical Change**	1.23"	7 ft	7	REF		
130508	45.6 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,192**
130509	52.5 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	104	SF	$120	**$12,432**
130510	70.6 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	131	SF	$120	**$15,708**
130511	92.5 to 93.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	9	SF	$120	**$1,092**
130512	95.9 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	265	SF	$120	**$31,836**

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **E YOSEMITE AVE** **$76,272.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2110191003	TOZER ST	LADA AVE	28111 LADA AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72811	0.8 to 11.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
72812	12.4 to 15.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
72810	16.1 to 17.1 feet	**Vertical Change**	2.51"	5 ft	5	SF	$75	**$375**
72813	21.4 to 27.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
72814	29.8 to 40.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
72815	42.0 to 47.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
72816	48.0 to 66.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,800**
72817	66.7 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
72818	74.9 to 76.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **LADA AVE** **$35,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190956	TOZER ST	MIRA LOMA WAY	E ALMOND AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72678	0.9 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
72679	4.8 to 11.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
72680	14.1 to 21.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
72681	21.4 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
72682	30.1 to 31.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
72683	31.7 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
72684	51.3 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
72685	56.8 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
72686	74.6 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72671	83.8 to 84.8 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
72687	95.8 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
72688	111.3 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
72689	128.2 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
72690	160.7 to 162.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
72691	166.0 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
72692	182.8 to 185.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
72693	187.2 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
72672	195.8 to 196.8 feet	**Vertical Change**	.49"	5 ft	5	REF		
72673	198.9 to 199.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
72694	199.5 to 200.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
72674	218.7 to 219.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
72695	250.8 to 252.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
72696	260.0 to 264.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
72697	276.9 to 281.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
72698	288.9 to 290.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
72699	301.3 to 313.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
72700	316.2 to 331.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
72701	335.8 to 339.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190956	TOZER ST	MIRA LOMA WAY	E ALMOND AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72702	350.8 to 354.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
72703	356.9 to 358.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
72704	374.0 to 377.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
72705	377.0 to 381.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
72706	381.7 to 390.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
72707	396.0 to 406.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
72708	410.2 to 415.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
72709	423.6 to 435.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
72710	438.3 to 448.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
72711	448.4 to 450.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
72712	453.4 to 474.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
72713	478.1 to 479.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
72714	484.3 to 489.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
72715	490.0 to 495.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
72716	498.3 to 502.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
72717	502.1 to 506.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
72718	506.1 to 522.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,660**
72719	522.5 to 558.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	180	SF	$120	**$21,540**
72720	562.1 to 564.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
72771	564.8 to 607.8 feet	Key Note Segment		5 ft	215			
72721	607.8 to 614.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	36	SF	$40	**$1,420**
72722	617.9 to 620.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
72723	627.0 to 629.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
72724	629.8 to 633.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
72725	648.8 to 654.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
72675	651.7 to 652.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
72726	660.8 to 662.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
72727	664.9 to 672.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190956	TOZER ST	MIRA LOMA WAY	E ALMOND AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72728	678.6 to 685.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
72729	689.4 to 691.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
72730	693.3 to 706.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
72676	703.6 to 704.6 feet	**Vertical Change**	-.35"	5 ft	5	REF		
72731	710.8 to 730.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
72732	733.1 to 736.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
72772	736.1 to 763.1 feet	Key Note Segment		5 ft	135			
72677	738.1 to 739.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
72733	763.6 to 769.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
72734	770.7 to 774.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
72735	776.8 to 778.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
72736	790.3 to 791.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
72737	794.5 to 803.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
72738	806.6 to 810.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
72739	813.5 to 814.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72740	817.4 to 828.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
72741	828.3 to 832.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
72742	838.0 to 848.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
72743	852.2 to 856.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
72744	859.8 to 868.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
72745	871.1 to 877.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
72746	884.3 to 887.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72747	887.0 to 893.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
72748	893.4 to 924.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	155	SF	$120	**$18,540**
72749	924.7 to 934.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
72750	934.8 to 946.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
72751	948.8 to 968.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	100	SF	$120	**$12,000**
72752	968.8 to 1000.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110190956	TOZER ST	MIRA LOMA WAY	E ALMOND AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72753	1015.0 to 1033.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
72754	1033.5 to 1037.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
72755	1037.2 to 1038.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72756	1040.7 to 1045.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
72757	1045.0 to 1046.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
72758	1049.8 to 1052.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
72759	1055.3 to 1069.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
72760	1077.8 to 1087.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
72761	1089.5 to 1092.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
72762	1098.3 to 1103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
72763	1107.3 to 1115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
72764	1115.3 to 1118.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
72765	1118.8 to 1123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
72766	1125.4 to 1141.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
72767	1143.4 to 1145.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
72768	1149.6 to 1153.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
72769	1153.5 to 1158.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
72770	1167.0 to 1172.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
72773	1173.9 to 1175.1 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **MIRA LOMA WAY** **$387,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191025	TOZER ST	OLIVE AVE	MIRA LOMA WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72857	0.0 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,580**
72858	14.3 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
72859	19.0 to 20.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
72860	24.6 to 27.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
72861	28.6 to 93.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	325	SF	$120	**$39,000**
72844	33.2 to 34.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
72845	45.5 to 46.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
72862	97.5 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	367	SF	$120	**$43,980**
72863	174.5 to 184.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
72864	188.3 to 189.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
72865	192.1 to 193.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
72866	196.6 to 210.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
72846	217.0 to 218.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
72867	218.0 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
72868	228.5 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	414	SF	$120	**$49,680**
72847	315.3 to 316.3 feet	**Vertical Change**	-.42"	5 ft	5	REF		
72869	316.1 to 318.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
72870	320.2 to 321.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
72871	325.0 to 330.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
72872	335.6 to 343.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
72873	344.8 to 358.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
72874	358.9 to 361.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
72875	362.8 to 370.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
72876	372.3 to 389.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
72877	398.4 to 401.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
72878	405.1 to 411.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
72879	415.4 to 416.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
72880	419.7 to 424.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191025	TOZER ST	OLIVE AVE	MIRA LOMA WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72881	425.3 to 448.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,620**
72882	450.3 to 460.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
72883	467.7 to 475.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
72884	481.5 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
72885	493.1 to 495.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
72886	502.2 to 514.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
72887	516.4 to 517.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
72888	526.0 to 534.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
72889	538.4 to 546.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
72890	549.1 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
72848	563.2 to 564.2 feet	**Vertical Change**	1.04"	5 ft	5	SF	$75	**$375**
72891	572.3 to 575.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
72849	585.1 to 586.1 feet	**Vertical Change**	.38"	5 ft	5	REF		
72892	585.3 to 587.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
72893	591.8 to 606.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
72894	609.6 to 644.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,060**
72850	618.9 to 619.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
72851	623.9 to 624.9 feet	**Vertical Change**	.55"	5 ft	5	REF		
72852	628.8 to 629.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
72895	654.6 to 657.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
72896	684.1 to 685.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
72897	690.1 to 694.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
72853	690.9 to 691.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
72898	702.5 to 706.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
72899	716.5 to 723.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
72900	726.1 to 727.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
72901	727.3 to 745.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
72902	747.9 to 751.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2110191025	TOZER ST	OLIVE AVE	MIRA LOMA WAY	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72903	752.0 to 759.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
72904	763.3 to 799.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	183	SF	$120	**$21,960**
72905	800.6 to 823.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
72906	824.3 to 835.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
72907	836.8 to 847.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
72854	848.2 to 849.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
72855	850.1 to 851.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
72856	864.8 to 865.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
72908	866.8 to 872.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
72909	883.3 to 887.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
72910	891.5 to 909.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**

TOTAL COST FOR: W *side of* **TOZER ST** *Starting at:* **OLIVE AVE** **$393,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091517	TOZER ST	TOZER ST	CLINTON ST	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130547	0.1 to 9.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	68	SF	$120	**$8,148**
130546	9.8 to 10.8 feet	**Vertical Change**	.43"	7 ft	7	REF		
130548	16.8 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	92	SF	$120	**$11,004**

TOTAL COST FOR: E *side of* **TOZER ST** *Starting at:* **TOZER ST** **$19,152.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170825	TRABON WAY	SUMMER SET LN	DOUBLE TREE WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71229	0.6 to 6.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
71291	7.8 to 38.3 feet	Key Note Segment		5 ft	152			
71210	10.1 to 11.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
71211	27.8 to 28.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
71230	40.0 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
71231	41.3 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
71232	55.2 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	126	SF	$120	**$15,120**
71212	73.8 to 74.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
71292	80.4 to 110.0 feet	Key Note Segment		5 ft	148			
71213	91.9 to 92.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
71214	100.3 to 101.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
71233	113.0 to 117.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
71234	118.2 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
71235	124.3 to 144.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
71236	144.3 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
71215	153.6 to 154.6 feet	**Vertical Change**	.57"	5 ft	5	REF		
71237	171.4 to 174.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
71293	175.2 to 205.1 feet	Key Note Segment		5 ft	150			
71216	196.1 to 197.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
71217	207.1 to 208.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
71238	210.8 to 216.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
71218	216.5 to 217.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
71239	217.3 to 223.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
71294	223.6 to 252.8 feet	Key Note Segment		5 ft	146			
71304	253.2 to 254.6 feet		5.0-6.0%	5 ft	7			
71240	256.4 to 264.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
71241	267.3 to 291.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
71242	291.6 to 292.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170825	TRABON WAY	SUMMER SET LN	DOUBLE TREE WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71295	293.0 to 323.0 feet	Key Note Segment		5 ft	150			
71219	295.9 to 296.9 feet	Vertical Change	.38"	5 ft	5	REF		
71243	326.1 to 363.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	188	SF	$120	$22,620
71296	365.6 to 394.0 feet	Key Note Segment		5 ft	142			
71220	367.7 to 368.7 feet	Vertical Change	-.29"	5 ft	5	REF		
71244	402.4 to 410.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
71245	414.6 to 427.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,800
71246	431.6 to 434.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
71297	434.1 to 465.7 feet	Key Note Segment		5 ft	158			
71221	435.6 to 436.6 feet	Vertical Change	-.28"	5 ft	5	REF		
71222	464.5 to 465.5 feet	Vertical Change	.26"	5 ft	5	REF		
71247	467.3 to 470.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,620
71248	473.9 to 475.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
71249	477.3 to 482.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
71250	486.0 to 487.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
71251	489.4 to 491.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	$1,380
71252	503.7 to 514.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
71223	521.0 to 522.0 feet	Vertical Change	-.32"	5 ft	5	LF	$75	$375
71253	522.7 to 530.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
71298	530.7 to 563.7 feet	Key Note Segment		5 ft	165			
71254	565.8 to 577.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,720
71299	577.3 to 605.6 feet	Key Note Segment		5 ft	142			
71224	577.6 to 578.6 feet	Vertical Change	.29"	5 ft	5	REF		
71225	580.0 to 581.0 feet	Vertical Change	-.33"	5 ft	5	REF		
71226	604.6 to 605.6 feet	Vertical Change	.41"	5 ft	5	REF		
71255	605.8 to 606.9 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	6	SF	$40	$220
71256	608.1 to 617.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	$5,460
71257	618.6 to 620.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170825	TRABON WAY	SUMMER SET LN	DOUBLE TREE WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71258	623.3 to 625.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
71259	629.3 to 633.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
71260	635.9 to 642.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
71261	644.8 to 646.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
71262	646.3 to 654.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
71263	654.9 to 682.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	137	SF	$120	**$16,440**
71300	683.5 to 704.6 feet	Key Note Segment		5 ft	106			
71264	707.3 to 710.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
71265	711.3 to 730.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
71266	730.9 to 754.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
71267	754.8 to 784.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	148	SF	$120	**$17,700**
71268	786.4 to 790.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
71269	793.8 to 803.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
71270	808.5 to 812.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
71271	819.3 to 821.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
71272	823.3 to 824.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
71273	826.0 to 827.2 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$720**
71274	834.3 to 839.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
71275	839.4 to 851.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
71276	855.4 to 867.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
71301	867.8 to 890.3 feet	Key Note Segment		5 ft	113			
71277	892.9 to 894.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
71302	894.8 to 916.8 feet	Key Note Segment		5 ft	110			
71278	918.7 to 927.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
71279	927.2 to 936.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
71227	928.7 to 929.7 feet	**Vertical Change**	2.58"	5 ft	5	REF		
71280	941.9 to 946.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
71281	952.8 to 954.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109170825	TRABON WAY	SUMMER SET LN	DOUBLE TREE WAY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71303	957.2 to 988.3 feet	Key Note Segment		5 ft	156			
71282	991.0 to 1015.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
71283	1015.6 to 1016.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
71284	1020.8 to 1022.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
71285	1025.9 to 1027.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
71286	1029.1 to 1034.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,300**
71287	1034.8 to 1040.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
71288	1042.3 to 1054.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**
71289	1056.6 to 1091.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	173	SF	$120	**$20,760**
71290	1092.7 to 1094.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71228	1093.2 to 1094.2 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **TRABON WAY** *Starting at:* **SUMMER SET LN** **$322,690.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161024	TRAGON ST	PAINTBRUSH DR	SUBURBAN AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70089	0.0 to 3.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
70090	3.8 to 5.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
70091	8.8 to 12.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,220**
70092	14.3 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
70093	16.5 to 21.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
70094	35.8 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
70132	47.8 to 69.1 feet	Key Note Segment		5 ft	106			
70095	81.3 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
70078	85.2 to 86.2 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
70096	90.1 to 105.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
70097	105.8 to 127.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,840**
70079	111.2 to 112.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
70098	130.3 to 135.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
70133	136.0 to 157.7 feet	Key Note Segment		5 ft	108			
70099	165.9 to 176.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
70134	177.2 to 199.2 feet	Key Note Segment		5 ft	110			
70100	210.5 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
70101	230.1 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
70102	247.3 to 248.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
70135	256.8 to 278.5 feet	Key Note Segment		5 ft	109			
70103	278.5 to 294.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	79	SF	$40	**$3,160**
70080	288.3 to 289.3 feet	**Vertical Change**	-.56"	5 ft	5	REF		
70104	299.0 to 302.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
70105	304.8 to 310.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
70136	311.7 to 334.5 feet	Key Note Segment		5 ft	114			
70081	313.2 to 314.2 feet	**Vertical Change**	.66"	5 ft	5	REF		
70106	335.3 to 339.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
70107	341.5 to 343.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161024	TRAGON ST	PAINTBRUSH DR	SUBURBAN AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70137	345.2 to 367.3 feet	Key Note Segment		5 ft	111			
70082	357.7 to 358.7 feet	Vertical Change	.36"	5 ft	5	REF		
70108	371.2 to 387.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	$9,780
70109	388.3 to 410.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	$13,560
70083	390.4 to 391.4 feet	Vertical Change	2.41"	5 ft	5	REF		
70138	410.9 to 433.3 feet	Key Note Segment		5 ft	112			
70084	412.4 to 413.4 feet	Vertical Change	.3"	5 ft	5	REF		
70110	436.8 to 445.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
70144	444.9 to 445.9 feet	Continuous Width	20"	5 ft	5	SF	$120	$600
70111	447.3 to 455.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,800
70139	468.8 to 492.1 feet	Key Note Segment		5 ft	117			
70085	482.9 to 483.9 feet	Vertical Change	.27"	5 ft	5	REF		
70112	493.3 to 496.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
70113	499.0 to 501.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
70114	508.9 to 513.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,640
70140	514.8 to 537.7 feet	Key Note Segment		5 ft	115			
70086	516.5 to 517.5 feet	Vertical Change	.35"	5 ft	5	REF		
70115	537.8 to 543.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,060
70087	547.1 to 548.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
70116	557.1 to 568.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,080
70117	572.8 to 585.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
70118	587.7 to 589.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,140
70119	592.5 to 593.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
70120	596.1 to 597.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$1,020
70121	599.8 to 601.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	$1,200
70141	601.8 to 618.4 feet	Key Note Segment		5 ft	83			
70122	618.4 to 623.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	$1,100
70123	626.1 to 637.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	$6,660

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109161024	TRAGON ST	PAINTBRUSH DR	SUBURBAN AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70124	645.3 to 646.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70125	648.4 to 652.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
70142	652.5 to 675.3 feet	Key Note Segment		5 ft	114			
70088	670.7 to 671.7 feet	**Vertical Change**	3.5"	5 ft	5	REF		
70126	676.5 to 677.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
70127	677.7 to 694.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
70143	694.7 to 715.8 feet	Key Note Segment		5 ft	106			
70128	715.8 to 730.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	72	SF	$40	**$2,880**
70129	732.5 to 738.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
70130	738.8 to 739.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
70131	742.1 to 744.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**

TOTAL COST FOR: N *side of* **TRAGON ST** *Starting at:* **PAINTBRUSH DR** **$156,490.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161113	TRAGON ST	SUBURBAN AVE	PAINTBRUSH DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70657	1.4 to 18.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
70658	23.7 to 25.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
70659	30.0 to 34.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
70660	35.5 to 40.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
70661	44.8 to 63.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
70662	73.5 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
70646	80.1 to 81.1 feet	**Vertical Change**	-.3"	5 ft	5	REF		
70686	84.0 to 108.8 feet	Key Note Segment		5 ft	124			
70647	101.4 to 102.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		
70663	115.9 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
70664	135.5 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
70665	147.1 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
70666	178.2 to 198.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
70687	198.0 to 222.7 feet	Key Note Segment		5 ft	124			
70648	206.1 to 207.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
70667	222.7 to 224.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
70668	224.9 to 239.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
70669	241.7 to 245.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
70670	245.8 to 256.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
70688	261.8 to 285.6 feet	Key Note Segment		5 ft	119			
70671	287.3 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
70672	300.9 to 306.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
70673	308.4 to 311.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
70689	312.7 to 336.8 feet	Key Note Segment		5 ft	121			
70674	338.2 to 356.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
70675	359.2 to 360.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
70676	365.7 to 391.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
70649	365.8 to 366.8 feet	**Vertical Change**	.43"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109161113	TRAGON ST	SUBURBAN AVE	PAINTBRUSH DR	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70651	403.0 to 404.0 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
70677	420.1 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
70678	431.1 to 434.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,220
70690	448.3 to 473.3 feet	Key Note Segment		5 ft	125			
70652	461.0 to 462.0 feet	Vertical Change	.27"	5 ft	5	REF		
70653	478.3 to 479.3 feet	Vertical Change	.95"	5 ft	5	SF	$75	$375
70679	492.2 to 495.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
70691	509.6 to 533.2 feet	Key Note Segment		5 ft	118			
70654	549.1 to 550.1 feet	Vertical Change	.35"	5 ft	5	LF	$75	$375
70692	588.4 to 610.4 feet	Key Note Segment		5 ft	110			
70655	611.7 to 612.7 feet	Vertical Change	.28"	5 ft	5	REF		
70680	612.4 to 615.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
70681	618.3 to 619.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	$900
70682	620.3 to 621.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
70693	624.2 to 647.3 feet	Key Note Segment		5 ft	115			
70683	647.3 to 652.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	27	SF	$40	$1,080
70684	652.7 to 681.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	$17,040
70656	673.1 to 674.1 feet	Vertical Change	.36"	5 ft	5	REF		
70685	682.3 to 687.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	$3,300

TOTAL COST FOR: S *side of* **TRAGON ST** *Starting at:* **SUBURBAN AVE** **$152,965.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108121123	TRAIL WAY	BRIDGE WAY	RD 28	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60432	0.8 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
60433	4.8 to 12.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
60434	14.3 to 22.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
60435	25.6 to 31.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
60436	31.3 to 35.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
60437	35.4 to 43.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,860**
60438	43.7 to 47.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
60439	47.8 to 61.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**

TOTAL COST FOR: S *side of* **TRAIL WAY** *Starting at:* **BRIDGE WAY** **$31,440.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108120940	TRAIL WAY	RD 28	BRIDGE WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
59522	1.2 to 3.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
59523	3.7 to 5.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
59524	5.2 to 6.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
59525	9.7 to 37.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	140	SF	$120	**$16,860**
59520	24.3 to 25.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
59526	39.1 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
59521	58.4 to 59.4 feet	**Vertical Change**	.45"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **TRAIL WAY** *Starting at:* **RD 28** **$32,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140842	TREVOR CT	STEPHANIE LN	2416 TREVOR CT	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63934	0.6 to 4.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
63935	4.8 to 9.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
63936	12.0 to 15.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
63937	17.3 to 24.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
63938	28.8 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
63939	32.6 to 33.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
63940	38.8 to 45.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
63972	46.3 to 75.0 feet	Key Note Segment		5 ft	144			
63919	58.6 to 59.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
63920	65.3 to 66.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
63941	78.1 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
63942	85.0 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
63943	93.1 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
63944	100.2 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
63945	105.0 to 107.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
63946	108.5 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
63947	122.0 to 123.3 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	7	SF	$120	**$780**
63948	127.3 to 128.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
63949	131.3 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
63973	140.9 to 168.8 feet	Key Note Segment		5 ft	140			
63921	153.0 to 154.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
63950	172.9 to 174.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
63951	177.8 to 179.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
63922	181.6 to 182.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
63952	181.6 to 182.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
63974	186.6 to 204.8 feet	Key Note Segment		5 ft	91			
63923	195.2 to 196.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		
63953	208.3 to 230.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	110	SF	$120	**$13,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140842	TREVOR CT	STEPHANIE LN	2416 TREVOR CT	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63924	227.2 to 228.2 feet	Vertical Change	-.52"	5 ft	5	REF		
63954	231.3 to 233.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
63955	244.1 to 249.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
63975	249.0 to 269.4 feet	Key Note Segment		5 ft	102			
63925	272.6 to 273.6 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
63926	283.5 to 284.5 feet	Vertical Change	-.57"	5 ft	5	SF	$75	$375
63976	284.8 to 304.4 feet	Key Note Segment		5 ft	98			
63927	294.7 to 295.7 feet	Vertical Change	.31"	5 ft	5	REF		
63928	305.7 to 306.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
63956	306.9 to 308.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
63957	308.7 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
63958	316.3 to 320.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	$2,520
63929	317.1 to 318.1 feet	Vertical Change	.32"	5 ft	5	REF		
63959	321.2 to 327.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
63960	330.2 to 334.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
63961	337.9 to 343.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,480
63977	343.8 to 366.8 feet	Key Note Segment		5 ft	115			
63930	358.5 to 359.5 feet	Vertical Change	.28"	5 ft	5	REF		
63962	371.2 to 372.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	$600
63931	377.2 to 378.2 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
63963	386.2 to 402.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	$9,600
63964	404.8 to 415.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	$6,600
63978	415.8 to 434.6 feet	Key Note Segment		5 ft	94			
63932	426.5 to 427.5 feet	Vertical Change	.28"	5 ft	5	REF		
63965	437.6 to 450.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	$7,560
63979	452.2 to 481.3 feet	Key Note Segment		5 ft	146			
63933	463.3 to 464.3 feet	Vertical Change	.45"	5 ft	5	REF		
63966	482.9 to 496.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	$7,860

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109140842	TREVOR CT	STEPHANIE LN	2416 TREVOR CT	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63967	499.8 to 512.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,500**
63968	514.8 to 539.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,580**
63980	544.5 to 571.7 feet	Key Note Segment		5 ft	136			
63969	574.3 to 578.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
63970	581.3 to 585.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
63971	587.6 to 618.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	155	SF	$120	**$18,540**
63981	618.3 to 619.7 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N / S *side of* **TREVOR CT** *Starting at:* **STEPHANIE LN** **$156,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140847	TREVOR WAY	2398 TREVOR WAY	N SCHNOOR AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64043	0.9 to 27.0 feet	Key Note Segment		5 ft	131			
64005	27.7 to 28.7 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	5	SF	$120	**$600**
64006	31.3 to 63.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	163	SF	$120	**$19,560**
64044	65.8 to 99.0 feet	Key Note Segment		5 ft	166			
63982	70.7 to 71.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
63983	79.4 to 80.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
64007	100.5 to 104.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
64008	105.6 to 112.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
64009	113.3 to 137.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,340**
63984	116.1 to 117.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
64010	137.8 to 143.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
64045	144.6 to 164.8 feet	Key Note Segment		5 ft	101			
63985	152.9 to 153.9 feet	**Vertical Change**	-.45"	5 ft	5	REF		
64011	168.6 to 186.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,860**
64012	187.3 to 188.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
64013	188.3 to 191.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
64014	195.0 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,640**
64015	219.4 to 263.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	222	SF	$120	**$26,640**
63986	227.9 to 228.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
63987	241.2 to 242.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
63988	254.9 to 255.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
64016	268.4 to 270.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
64017	271.2 to 272.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
64046	273.3 to 303.0 feet	Key Note Segment		5 ft	149			
64018	305.0 to 358.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	267	SF	$120	**$32,040**
63989	348.6 to 349.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
64047	362.3 to 389.6 feet	Key Note Segment		5 ft	137			
63990	380.8 to 381.8 feet	**Vertical Change**	.54"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140847	TREVOR WAY	2398 TREVOR WAY	N SCHNOOR AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63991	390.8 to 391.8 feet	Vertical Change	.27"	5 ft	5	LF	$75	$375
64019	392.2 to 399.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	$4,260
64020	401.5 to 404.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
64048	405.3 to 435.8 feet	Key Note Segment		5 ft	153			
63992	423.8 to 424.8 feet	Vertical Change	.35"	5 ft	5	REF		
64021	437.0 to 442.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	$3,000
64022	442.0 to 447.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	$3,480
64023	450.2 to 492.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	214	SF	$120	$25,620
63993	455.6 to 456.6 feet	Vertical Change	.27"	5 ft	5	REF		
64024	493.8 to 501.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,500
64049	506.3 to 536.5 feet	Key Note Segment		5 ft	151			
64025	539.3 to 570.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	154	SF	$120	$18,480
63994	544.8 to 545.8 feet	Vertical Change	.34"	5 ft	5	REF		
63995	560.1 to 561.1 feet	Vertical Change	.65"	5 ft	5	REF		
64026	572.5 to 600.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	$16,560
63996	599.5 to 600.5 feet	Vertical Change	.38"	5 ft	5	REF		
64027	602.6 to 608.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,420
64028	614.4 to 616.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
64029	619.3 to 624.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
63997	621.4 to 622.4 feet	Vertical Change	.27"	5 ft	5	REF		
64050	627.7 to 663.0 feet	Key Note Segment		5 ft	176			
64030	666.8 to 674.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	$4,800
63998	673.9 to 674.9 feet	Vertical Change	-.3"	5 ft	5	REF		
64031	674.8 to 675.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
64051	675.9 to 705.1 feet	Key Note Segment		5 ft	146			
63999	684.2 to 685.2 feet	Vertical Change	-.38"	5 ft	5	REF		
64000	694.5 to 695.5 feet	Vertical Change	.31"	5 ft	5	REF		
64032	706.9 to 716.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140847	TREVOR WAY	2398 TREVOR WAY	N SCHNOOR AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64033	720.8 to 730.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
64001	721.4 to 722.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
64034	732.7 to 803.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	352	SF	$120	**$42,180**
64002	732.9 to 733.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64052	803.0 to 833.8 feet	Key Note Segment		5 ft	154			
64003	805.7 to 806.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
64035	835.6 to 844.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
64053	844.8 to 873.8 feet	Key Note Segment		5 ft	145			
64036	876.6 to 880.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
64037	881.8 to 889.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
64038	889.5 to 902.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
64039	904.7 to 922.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	91	SF	$120	**$10,860**
64040	925.6 to 936.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
64054	936.0 to 966.6 feet	Key Note Segment		5 ft	153			
64004	937.0 to 938.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
64041	969.3 to 978.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
64042	978.1 to 1004.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**

TOTAL COST FOR: S *side of* **TREVOR WAY** *Starting at:* **2398 TREVOR WAY** **$337,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140854	TREVOR WAY	SCHNOOR AVE	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64085	0.3 to 7.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
64086	10.8 to 16.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	30	SF	$120	**$3,600**
64055	15.3 to 16.3 feet	**Vertical Change**	1.91"	5 ft	5	REF		
64087	16.8 to 19.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
64088	19.8 to 21.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
64089	22.8 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
64090	30.5 to 31.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
64136	31.6 to 58.8 feet	Key Note Segment		5 ft	136			
64056	43.0 to 44.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
64091	65.6 to 75.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
64092	81.6 to 82.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64093	83.4 to 88.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
64057	84.3 to 85.3 feet	**Vertical Change**	.54"	5 ft	5	REF		
64094	90.0 to 104.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	73	SF	$120	**$8,700**
64137	105.2 to 133.2 feet	Key Note Segment		5 ft	140			
64095	135.8 to 139.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,340**
64138	139.7 to 159.2 feet	Key Note Segment		5 ft	98			
64058	160.9 to 161.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
64096	161.3 to 175.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,580**
64097	177.7 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
64059	182.6 to 183.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
64098	185.8 to 194.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
64099	197.4 to 204.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
64139	205.0 to 234.8 feet	Key Note Segment		5 ft	149			
64060	215.7 to 216.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
64061	223.4 to 224.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
64100	235.0 to 236.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	6	SF	$40	**$220**
64101	236.8 to 237.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140854	TREVOR WAY	SCHNOOR AVE	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64102	240.5 to 248.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
64103	250.8 to 253.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
64104	253.6 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
64105	287.5 to 295.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
64140	295.8 to 316.0 feet	Key Note Segment		5 ft	101			
64062	316.7 to 317.7 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
64106	318.3 to 319.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64107	326.6 to 361.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	173	SF	$120	**$20,820**
64108	361.5 to 362.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64141	365.9 to 394.5 feet	Key Note Segment		5 ft	143			
64109	396.6 to 420.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,220**
64110	420.3 to 438.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	93	SF	$120	**$11,160**
64111	438.9 to 448.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
64112	450.4 to 489.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	197	SF	$120	**$23,640**
64064	463.9 to 464.9 feet	Vertical Change	.3"	5 ft	5	REF		
64142	489.8 to 520.3 feet	Key Note Segment		5 ft	152			
64065	503.8 to 504.8 feet	Vertical Change	.3"	5 ft	5	REF		
64113	522.6 to 562.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	198	SF	$120	**$23,760**
64066	537.8 to 538.8 feet	Vertical Change	.4"	5 ft	5	REF		
64067	553.4 to 554.4 feet	Vertical Change	.53"	5 ft	5	REF		
64068	561.3 to 562.3 feet	Vertical Change	1.46"	5 ft	5	REF		
64114	562.2 to 565.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
64143	566.3 to 587.6 feet	Key Note Segment		5 ft	107			
64069	567.0 to 568.0 feet	Vertical Change	.35"	5 ft	5	REF		
64070	577.7 to 578.7 feet	Vertical Change	.27"	5 ft	5	REF		
64071	588.1 to 589.1 feet	Vertical Change	-.33"	5 ft	5	REF		
64115	588.4 to 589.6 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	6	SF	$40	**$240**
64116	590.2 to 621.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$19,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140854	TREVOR WAY	SCHNOOR AVE	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64072	600.0 to 601.0 feet	Vertical Change	.27"	5 ft	5	REF		
64073	612.2 to 613.2 feet	Vertical Change	-.27"	5 ft	5	REF		
64117	621.9 to 639.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,620**
64074	627.2 to 628.2 feet	Vertical Change	.3"	5 ft	5	REF		
64144	640.5 to 662.1 feet	Key Note Segment		5 ft	108			
64118	664.7 to 696.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
64075	681.9 to 682.9 feet	Vertical Change	.26"	5 ft	5	REF		
64076	696.2 to 697.2 feet	Vertical Change	.44"	5 ft	5	REF		
64119	698.4 to 704.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
64120	704.8 to 706.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64145	708.3 to 730.4 feet	Key Note Segment		5 ft	111			
64121	733.3 to 734.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
64146	735.0 to 763.6 feet	Key Note Segment		5 ft	143			
64077	746.0 to 747.0 feet	Vertical Change	.29"	5 ft	5	REF		
64122	766.3 to 781.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	74	SF	$120	**$8,820**
64078	770.4 to 771.4 feet	Vertical Change	-.28"	5 ft	5	REF		
64123	785.8 to 813.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	140	SF	$120	**$16,800**
64079	799.4 to 800.4 feet	Vertical Change	.27"	5 ft	5	REF		
64124	816.0 to 820.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
64125	821.4 to 823.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
64147	824.5 to 845.3 feet	Key Note Segment		5 ft	104			
64080	825.3 to 826.3 feet	Vertical Change	.85"	5 ft	5	REF		
64081	828.0 to 829.0 feet	Vertical Change	.35"	5 ft	5	REF		
64082	846.1 to 847.1 feet	Vertical Change	.38"	5 ft	5	REF		
64126	846.4 to 850.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
64127	851.3 to 869.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
64128	869.2 to 893.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
64148	893.7 to 926.9 feet	Key Note Segment		5 ft	166			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109140854	TREVOR WAY	SCHNOOR AVE	STEPHANIE LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64083	912.7 to 913.7 feet	Vertical Change	.32"	5 ft	5	REF		
64129	927.0 to 937.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	52	SF	$40	**$2,060**
64084	930.5 to 931.5 feet	Vertical Change	.31"	5 ft	5	REF		
64130	937.3 to 945.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
64131	945.3 to 948.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
64132	949.3 to 950.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
64133	950.7 to 958.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,740**
64134	959.4 to 960.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64135	962.8 to 976.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
64149	974.5 to 975.6 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **TREVOR WAY** *Starting at:* **SCHNOOR AVE** **$325,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271412	TRIVISO AVE	CHATOM WY	NAPOLI ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111327	0.0 to 6.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
111340	19.6 to 37.9 feet	Key Note Segment		5 ft	91			
111328	42.4 to 44.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
111341	46.6 to 67.6 feet	Key Note Segment		5 ft	105			
111319	70.2 to 71.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
111320	84.3 to 85.3 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
111329	89.3 to 92.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
111321	94.2 to 95.2 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
111330	110.0 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
111342	125.3 to 144.9 feet	Key Note Segment		5 ft	98			
111331	146.3 to 149.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
111332	149.7 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
111343	154.5 to 173.1 feet	Key Note Segment		5 ft	93			
111322	163.5 to 164.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
111333	175.3 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
111323	183.6 to 184.6 feet	**Vertical Change**	1.02"	5 ft	5	REF		
111334	183.8 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111324	190.9 to 191.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
111335	197.5 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
111325	199.6 to 200.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
111336	203.0 to 207.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
111337	224.1 to 228.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
111344	228.4 to 251.9 feet	Key Note Segment		5 ft	118			
111338	253.6 to 255.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
111345	261.2 to 279.1 feet	Key Note Segment		5 ft	90			
111339	281.7 to 291.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**

TOTAL COST FOR: N *side of* **TRIVISO AVE** *Starting at:* **CHATOM WY** **$38,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271424	TRIVISO AVE	NAPOLI ST	POMPEI ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111416	3.0 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
111449	17.4 to 38.8 feet	Key Note Segment		5 ft	107			
111417	40.3 to 42.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
111418	42.8 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
111419	53.3 to 62.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
111450	74.8 to 93.4 feet	Key Note Segment		5 ft	93			
111420	97.0 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
111451	102.7 to 124.2 feet	Key Note Segment		5 ft	108			
111421	126.3 to 127.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111422	132.0 to 152.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
111403	145.0 to 146.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
111423	155.6 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
111424	171.3 to 179.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
111452	179.5 to 202.5 feet	Key Note Segment		5 ft	115			
111404	204.8 to 205.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
111425	206.8 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
111453	211.3 to 232.4 feet	Key Note Segment		5 ft	106			
111405	223.5 to 224.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
111406	235.0 to 236.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
111426	235.4 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
111407	240.6 to 241.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
111408	250.2 to 251.2 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
111427	256.1 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
111428	279.5 to 282.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
111454	288.8 to 311.2 feet	Key Note Segment		5 ft	112			
111429	312.2 to 313.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
111455	319.7 to 342.0 feet	Key Note Segment		5 ft	112			
111430	343.8 to 347.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271424	TRIVISO AVE	NAPOLI ST	POMPEI ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111431	347.0 to 349.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
111432	352.8 to 355.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
111433	357.4 to 358.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111434	361.5 to 364.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
111435	366.3 to 395.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,400**
111409	396.9 to 397.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
111456	397.7 to 420.3 feet	Key Note Segment		5 ft	113			
111436	422.2 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
111457	429.0 to 449.7 feet	Key Note Segment		5 ft	104			
111437	453.1 to 466.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
111438	471.1 to 481.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
111439	484.1 to 495.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**
111410	498.5 to 499.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111440	504.2 to 506.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111458	507.4 to 528.1 feet	Key Note Segment		5 ft	104			
111441	530.3 to 535.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
111459	538.8 to 559.6 feet	Key Note Segment		5 ft	104			
111442	564.8 to 565.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
111443	571.0 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
111413	602.8 to 603.8 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
111444	605.4 to 607.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
111414	613.1 to 614.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
111445	614.5 to 615.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
111460	615.8 to 636.1 feet	Key Note Segment		5 ft	102			
111446	641.0 to 643.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
111461	647.1 to 666.3 feet	Key Note Segment		5 ft	96			
111415	657.1 to 658.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
111447	670.0 to 673.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201271424	TRIVISO AVE	NAPOLI ST	POMPEI ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111448	676.2 to 681.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: S *side of* **TRIVISO AVE** *Starting at:* **NAPOLI ST** **$112,365.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271405	TRIVISO AVE	POMPEI ST	CHATOM WY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111284	2.6 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
111285	9.8 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
111303	10.9 to 31.1 feet	Key Note Segment		5 ft	101			
111286	37.9 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
111271	38.7 to 39.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
111287	48.0 to 49.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
111288	50.5 to 51.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
111304	51.9 to 69.8 feet	Key Note Segment		5 ft	90			
111289	72.0 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
111272	77.4 to 78.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
111290	78.1 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
111291	85.9 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
111292	95.3 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
111293	105.8 to 127.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
111273	125.5 to 126.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
111305	129.8 to 151.6 feet	Key Note Segment		5 ft	109			
111294	153.4 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
111274	155.1 to 156.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
111306	160.0 to 179.3 feet	Key Note Segment		5 ft	97			
111295	180.6 to 183.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
111275	182.8 to 183.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
111296	189.3 to 198.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
111276	215.2 to 216.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
111297	228.0 to 229.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
111298	235.8 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
111307	239.0 to 258.7 feet	Key Note Segment		5 ft	99			
111277	240.5 to 241.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
111278	249.4 to 250.4 feet	**Vertical Change**	-.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201271405	TRIVISO AVE	POMPEI ST	CHATOM WY	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111279	256.2 to 257.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111299	261.6 to 264.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
111308	267.2 to 288.9 feet	Key Note Segment		5 ft	108			
111300	290.3 to 292.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
111280	290.4 to 291.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111301	296.7 to 303.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
111302	306.7 to 318.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
111309	320.9 to 339.2 feet	Key Note Segment		5 ft	92			
111283	334.6 to 335.6 feet	**Vertical Change**	.75"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **TRIVISO AVE** *Starting at:* **POMPEI ST** **$56,535.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081429	TRUMAN DR	EISENHOWER LN	PIERCE LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127227	8.0 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
127220	17.3 to 18.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
127228	17.3 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
127229	22.2 to 23.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
127255	27.5 to 41.5 feet	Key Note Segment		5 ft	70			
127230	48.3 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
127256	53.3 to 68.1 feet	Key Note Segment		5 ft	74			
127231	68.3 to 70.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
127232	70.5 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
127233	82.5 to 129.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	234	SF	$120	**$28,080**
127257	130.1 to 144.8 feet	Key Note Segment		5 ft	74			
127234	144.9 to 146.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
127235	147.2 to 156.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
127221	151.3 to 152.3 feet	**Vertical Change**	1.33"	5 ft	5	REF		
127258	157.1 to 170.9 feet	Key Note Segment		5 ft	69			
127236	171.2 to 174.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
127222	175.9 to 176.9 feet	**Vertical Change**	.98"	5 ft	5	SF	$75	**$375**
127237	177.6 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
127238	190.4 to 196.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
127239	199.4 to 210.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
127240	212.1 to 218.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
127241	219.2 to 232.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
127259	234.6 to 248.5 feet	Key Note Segment		5 ft	70			
127242	248.5 to 256.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	41	SF	$40	**$1,640**
127223	252.4 to 253.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
127243	257.3 to 260.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
127260	260.0 to 274.3 feet	Key Note Segment		5 ft	72			
127224	271.5 to 272.5 feet	**Vertical Change**	.29"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081429	TRUMAN DR	EISENHOWER LN	PIERCE LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127244	274.9 to 298.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,340**
127245	300.4 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
127246	315.3 to 317.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
127247	320.3 to 336.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	83	SF	$120	**$9,960**
127261	337.8 to 352.4 feet	Key Note Segment		5 ft	73			
127248	352.4 to 361.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,720**
127262	362.2 to 378.6 feet	Key Note Segment		5 ft	82			
127249	378.6 to 379.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
127250	382.1 to 415.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,920**
127225	405.4 to 406.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
127264	407.5 to 408.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
127263	415.3 to 429.6 feet	Key Note Segment		5 ft	72			
127251	429.7 to 432.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	13	SF	$40	**$500**
127252	436.3 to 442.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
127253	442.9 to 452.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
127226	448.7 to 449.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
127254	452.8 to 456.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: W *side of* **TRUMAN DR** *Starting at:* **EISENHOWER LN** **$149,094.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081256	TRUMAN DR	HOOVER AVE	TYLER LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126706	0.0 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
126729	24.7 to 38.5 feet	Key Note Segment		5 ft	69			
126689	24.9 to 25.9 feet	**Vertical Change**	1.55"	5 ft	5	REF		
126707	40.9 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
126708	46.4 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
126730	51.2 to 65.2 feet	Key Note Segment		5 ft	70			
126690	62.5 to 63.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126709	65.2 to 68.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
126710	74.3 to 86.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
126691	95.2 to 96.2 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
126692	103.9 to 104.9 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
126711	106.8 to 110.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
126731	131.3 to 144.7 feet	Key Note Segment		5 ft	67			
126732	156.9 to 170.6 feet	Key Note Segment		5 ft	69			
126712	170.7 to 173.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**
126713	177.8 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
126693	188.2 to 189.2 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126714	196.5 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
126694	205.7 to 206.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
126715	208.9 to 218.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
126716	219.3 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
126733	236.9 to 250.2 feet	Key Note Segment		5 ft	67			
126695	247.7 to 248.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
126717	251.7 to 262.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
126734	262.3 to 276.6 feet	Key Note Segment		5 ft	72			
126696	267.5 to 268.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
126697	273.7 to 274.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126718	277.2 to 317.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	203	SF	$40	**$8,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202081256	TRUMAN DR	HOOVER AVE	TYLER LN	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126698	288.4 to 289.4 feet	Vertical Change	.27"	5 ft	5	REF		
126699	297.0 to 298.0 feet	Vertical Change	.52"	5 ft	5	REF		
126700	305.9 to 306.9 feet	Vertical Change	.35"	5 ft	5	REF		
126719	320.7 to 328.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
126720	329.7 to 336.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
126721	337.5 to 340.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
126701	340.4 to 341.4 feet	Vertical Change	.29"	5 ft	5	REF		
126735	340.4 to 354.7 feet	Key Note Segment		5 ft	72			
126722	354.7 to 365.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	53	SF	$40	**$2,120**
126736	367.1 to 380.8 feet	Key Note Segment		5 ft	69			
126702	378.6 to 379.6 feet	Vertical Change	-.3"	5 ft	5	REF		
126723	381.2 to 418.5 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	187	SF	$40	**$7,460**
126703	401.3 to 402.3 feet	Vertical Change	.26"	5 ft	5	REF		
126724	418.8 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
126737	420.3 to 434.5 feet	Key Note Segment		5 ft	71			
126704	424.9 to 425.9 feet	Vertical Change	.32"	5 ft	5	REF		
126725	438.2 to 439.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
126726	441.1 to 445.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
126727	446.5 to 458.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
126728	458.8 to 464.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,180**

TOTAL COST FOR: W *side of* **TRUMAN DR** *Starting at:* **HOOVER AVE** **$98,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081320	TRUMAN DR	PIERCE LN	POLK AVE	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126930	0.9 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
126928	1.4 to 2.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
126944	3.5 to 17.8 feet	Key Note Segment		5 ft	72			
126931	20.2 to 22.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
126932	25.7 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
126945	30.0 to 43.2 feet	Key Note Segment		5 ft	66			
126933	71.0 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
126934	75.8 to 98.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	**$13,560**
126935	98.4 to 99.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
126946	101.9 to 115.7 feet	Key Note Segment		5 ft	69			
126936	116.8 to 119.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
126937	120.1 to 126.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
126947	127.1 to 141.7 feet	Key Note Segment		5 ft	73			
126938	142.8 to 151.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
126939	152.2 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
126940	158.3 to 172.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
126941	174.4 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
126948	179.8 to 193.8 feet	Key Note Segment		5 ft	70			
126942	197.1 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
126943	215.3 to 224.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: E *side of* **TRUMAN DR** *Starting at:* **PIERCE LN** **$54,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081325	TRUMAN DR	POLK AVE	EISENHOWER LN	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126961	1.1 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
126962	16.1 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,660**
126955	26.4 to 27.4 feet	**Vertical Change**	.47"	5 ft	5	REF		
126972	27.2 to 41.0 feet	Key Note Segment		5 ft	69			
126963	41.0 to 44.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
126964	45.0 to 53.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
126973	53.7 to 67.1 feet	Key Note Segment		5 ft	67			
126965	67.9 to 70.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
126966	72.3 to 84.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
126967	95.2 to 112.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
126956	103.4 to 104.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
126968	115.5 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
126974	131.8 to 144.4 feet	Key Note Segment		5 ft	63			
126957	136.0 to 137.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
126958	148.2 to 149.2 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
126959	150.0 to 151.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
126975	157.2 to 170.5 feet	Key Note Segment		5 ft	67			
126969	175.0 to 177.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
126970	180.7 to 218.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	189	SF	$120	**$22,680**
126971	224.4 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
126976	225.6 to 237.0 feet	Key Note Segment		5 ft	57			
126960	226.1 to 227.1 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TRUMAN DR** *Starting at:* **POLK AVE** **$69,910.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081221	TRUMAN DR	TAFT DR	HOOVER AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126353	0.0 to 2.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
126354	3.2 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
126363	25.6 to 42.0 feet	Key Note Segment		5 ft	82			
126345	30.9 to 31.9 feet	**Vertical Change**	1.09"	5 ft	5	REF		
126355	64.3 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
126364	78.6 to 91.8 feet	Key Note Segment		5 ft	66			
126346	83.3 to 84.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
126347	88.7 to 89.7 feet	**Vertical Change**	.89"	5 ft	5	REF		
126356	96.5 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
126348	102.9 to 103.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
126365	103.9 to 118.0 feet	Key Note Segment		5 ft	71			
126357	118.0 to 147.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	145	SF	$40	**$5,800**
126349	126.4 to 127.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
126358	147.5 to 151.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
126359	152.7 to 170.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
126366	171.7 to 186.1 feet	Key Note Segment		5 ft	72			
126360	186.8 to 189.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
126350	189.7 to 190.7 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
126361	192.0 to 195.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
126351	196.4 to 197.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
126367	197.7 to 211.7 feet	Key Note Segment		5 ft	70			
126362	211.7 to 218.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	34	SF	$40	**$1,360**
126352	216.4 to 217.4 feet	**Vertical Change**	-.45"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TRUMAN DR** *Starting at:* **TAFT DR** **$46,970.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081216	TRUMAN DR	TYLER LN	TAFT DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126299	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
126300	2.6 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
126288	7.3 to 8.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
126301	7.6 to 8.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
126322	10.1 to 25.6 feet	Key Note Segment		5 ft	78			
126302	25.6 to 29.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
126289	28.3 to 29.3 feet	**Vertical Change**	1.03"	5 ft	5	REF		
126303	35.4 to 36.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
126323	36.9 to 51.8 feet	Key Note Segment		5 ft	75			
126290	46.8 to 47.8 feet	**Vertical Change**	.45"	5 ft	5	REF		
126304	53.6 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
126305	65.3 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
126306	68.4 to 70.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
126307	71.4 to 90.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,700**
126308	93.3 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
126291	105.0 to 106.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
126324	106.6 to 120.8 feet	Key Note Segment		5 ft	71			
126292	114.7 to 115.7 feet	**Vertical Change**	.65"	5 ft	5	REF		
126309	121.7 to 122.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
126310	123.6 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
126293	130.8 to 131.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
126325	131.4 to 146.1 feet	Key Note Segment		5 ft	74			
126311	146.1 to 159.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	65	SF	$40	**$2,580**
126294	149.4 to 152.6 feet	**Vertical Change**	.38"	5 ft	16	REF		
126312	161.8 to 169.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
126313	172.0 to 175.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
126314	175.9 to 207.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,780**
126295	191.1 to 192.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081216	TRUMAN DR	TYLER LN	TAFT DR	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126296	200.7 to 201.7 feet	Vertical Change	1.94"	5 ft	5	REF		
126326	209.1 to 223.6 feet	Key Note Segment		5 ft	73			
126315	223.6 to 228.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	27	SF	$40	**$1,060**
126316	228.9 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
126327	234.8 to 249.0 feet	Key Note Segment		5 ft	71			
126297	240.4 to 241.4 feet	Vertical Change	-.29"	5 ft	5	REF		
126317	249.0 to 252.0 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	**$600**
126318	257.9 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
126298	263.1 to 264.1 feet	Vertical Change	1.68"	5 ft	5	SF	$75	**$375**
126319	266.3 to 270.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
126320	273.0 to 276.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
126321	277.6 to 280.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**

TOTAL COST FOR: E *side of* **TRUMAN DR** *Starting at:* **TYLER LN** **$79,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081527	TULARE ST	1200 E SHERWOOD WAY	E SHERWOOD WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127487	0.2 to 9.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
127488	11.8 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
127489	17.3 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
127490	23.3 to 51.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	139	SF	$120	**$16,680**
127491	51.1 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
127492	56.7 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
127493	61.5 to 75.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **1200 E SHERWOOD WAY** **$38,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081640	TULARE ST	1509 TULARE ST	1608 TULARE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128331	3.4 to 20.0 feet	Key Note Segment		4 ft	66			
128297	3.9 to 4.9 feet	Vertical Change	-.29"	4 ft	4	REF		
128298	19.7 to 20.7 feet	Vertical Change	.27"	4 ft	4	REF		
128304	20.3 to 55.6 feet	Cross Slope (Driveway)	5.0-6.0%	4 ft	141	SF	$40	**$5,648**
128305	57.3 to 64.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,312**
128306	67.4 to 70.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
128307	73.1 to 80.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,408**
128332	80.6 to 96.3 feet	Key Note Segment		4 ft	63			
128308	96.3 to 99.3 feet	Cross Slope (Driveway)	12.0-13.0%	4 ft	12	SF	$40	**$480**
128309	102.8 to 126.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	95	SF	$120	**$11,376**
128299	106.8 to 107.8 feet	Vertical Change	-.3"	4 ft	4	REF		
128310	127.0 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,488**
128311	142.8 to 160.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	70	SF	$120	**$8,352**
128300	150.5 to 151.5 feet	Vertical Change	3.5"	4 ft	4	REF		
128312	160.2 to 162.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	8	SF	$120	**$1,008**
128313	162.3 to 165.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	14	SF	$120	**$1,680**
128314	166.8 to 169.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
128315	170.6 to 176.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
128333	176.5 to 189.2 feet	Key Note Segment		4 ft	51			
128316	191.3 to 199.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,128**
128317	201.3 to 208.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,504**
128301	205.5 to 206.5 feet	Vertical Change	-.37"	4 ft	4	REF		
128318	208.8 to 217.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,080**
128319	219.6 to 232.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	50	SF	$120	**$6,000**
128320	232.1 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
128321	246.9 to 254.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,552**
128322	255.8 to 310.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	217	SF	$120	**$26,016**
128323	311.3 to 314.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081640	TULARE ST	1509 TULARE ST	1608 TULARE ST	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128302	312.7 to 313.7 feet	**Vertical Change**	.34"	4 ft	4	REF		
128324	314.3 to 315.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
128325	317.4 to 318.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$720**
128326	323.2 to 324.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$768**
128327	327.1 to 330.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
128328	334.0 to 356.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	92	SF	$120	**$10,992**
128303	345.4 to 346.4 feet	**Vertical Change**	-.29"	4 ft	4	REF		
128329	359.2 to 382.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	92	SF	$120	**$11,088**
128330	384.9 to 407.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	92	SF	$120	**$11,040**

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **1509 TULARE ST** **$139,616.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071119	TULARE ST	1608 TULARE ST	E CLARK ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122812	0.0 to 1.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	6	SF	$120	**$660**
122817	1.1 to 11.9 feet	Key Note Segment		5 ft	54			
122813	13.4 to 20.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
122814	22.2 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
122806	26.3 to 27.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
122807	41.7 to 42.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
122815	46.3 to 51.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
122818	52.9 to 71.2 feet	Key Note Segment		5 ft	92			
122808	54.4 to 55.4 feet	**Vertical Change**	-.33"	5 ft	5	REF		
122816	72.4 to 98.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	129	SF	$120	**$15,540**
122810	96.1 to 97.1 feet	**Vertical Change**	1.32"	5 ft	5	REF		
122811	97.9 to 98.9 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **TULARE ST** *Starting at:* **1608 TULARE ST** **$36,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071117	TULARE ST	26 TULARE ST	26 TULARE ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122801	0.0 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	**$5,424**
122802	13.9 to 28.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	57	SF	$120	**$6,816**
122803	33.8 to 41.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
122804	41.8 to 44.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,440**
122805	47.7 to 73.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	104	SF	$120	**$12,432**
122800	61.2 to 62.2 feet	**Vertical Change**	-.26"	4 ft	4	REF		

TOTAL COST FOR: W *side of* **TULARE ST** *Starting at:* **26 TULARE ST** **$29,952.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071140	TULARE ST	E CLARK ST	1128 E CLARK ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122968	0.0 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
122969	9.1 to 18.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
122970	19.3 to 22.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
122971	22.9 to 29.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	35	SF	$120	**$4,140**
122977	29.9 to 51.0 feet	Key Note Segment		5 ft	106			
122972	53.4 to 71.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
122967	58.4 to 59.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
122973	75.5 to 83.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
122974	83.7 to 98.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
122978	98.2 to 112.8 feet	Key Note Segment		5 ft	73			
122975	113.3 to 114.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	5	SF	$40	**$200**
122976	114.9 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

TOTAL COST FOR: W *side of* **TULARE ST** *Starting at:* **E CLARK ST** **$42,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2106071655	TULARE ST	E CLEVELAND AVE	1200 TULARE ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
44746	0.2 to 7.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	**$3,648**
44747	9.8 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,568**
44748	23.5 to 24.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
44749	24.7 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	267	SF	$120	**$32,064**
44750	102.3 to 116.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,960**
44745	112.0 to 113.0 feet	**Vertical Change**	-.26"	4 ft	4	REF		
44751	120.7 to 139.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,928**
44752	139.3 to 166.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	109	SF	$120	**$13,104**
44753	168.8 to 206.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	151	SF	$120	**$18,144**
44754	216.1 to 224.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	34	SF	$120	**$4,032**
44755	226.2 to 229.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
44756	233.2 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	121	SF	$120	**$14,496**
44759	263.4 to 286.8 feet	Key Note Segment		4 ft	94			
44757	287.2 to 297.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	43	SF	$40	**$1,712**
44758	302.7 to 309.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **E CLEVELAND AVE** **$113,936.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091639	TULARE ST	E LINCOLN AVE	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130945	3.0 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,280**
130946	39.4 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
130919	45.9 to 46.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
130947	49.1 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
130948	57.8 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
130920	58.6 to 59.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
130949	65.3 to 68.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
130950	68.5 to 70.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130951	73.9 to 78.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
130952	87.9 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
130953	96.4 to 118.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
130954	123.0 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
130955	138.8 to 149.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
130922	148.5 to 149.5 feet	**Vertical Change**	.39"	5 ft	5	REF		
130956	149.2 to 152.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
130957	152.8 to 165.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,380**
130958	165.1 to 176.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
130959	176.8 to 182.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
130960	183.6 to 195.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
130961	195.9 to 200.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
130962	204.8 to 208.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
130963	208.2 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
130924	214.5 to 215.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
130964	222.0 to 230.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
130965	232.9 to 241.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
130925	240.2 to 241.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
130966	248.9 to 289.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,480**
130927	263.6 to 264.6 feet	**Vertical Change**	.38"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091639	TULARE ST	E LINCOLN AVE	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130928	291.2 to 292.2 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
130967	294.5 to 297.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,740
130968	298.5 to 351.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	265	SF	$120	$31,740
130929	329.9 to 330.9 feet	Vertical Change	.35"	5 ft	5	REF		
130969	353.9 to 367.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	$8,340
130930	354.0 to 355.0 feet	Vertical Change	.28"	5 ft	5	REF		
130970	371.3 to 374.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
130971	377.0 to 379.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
130972	383.3 to 400.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	$10,380
130973	401.3 to 405.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
130974	407.8 to 443.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	$21,360
130931	432.1 to 433.1 feet	Vertical Change	.33"	5 ft	5	REF		
130932	444.9 to 445.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
130975	447.8 to 466.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	$11,280
130933	457.7 to 458.7 feet	Vertical Change	-.29"	5 ft	5	REF		
130976	468.9 to 479.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
130977	486.5 to 538.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	258	SF	$120	$30,900
130934	535.5 to 536.5 feet	Vertical Change	-.27"	5 ft	5	REF		
130978	540.6 to 561.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	$12,480
130979	562.2 to 573.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	$6,840
130935	562.5 to 563.5 feet	Vertical Change	.28"	5 ft	5	REF		
130980	574.4 to 577.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
130981	581.8 to 584.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
130982	584.2 to 590.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	$3,660
130937	591.5 to 592.5 feet	Vertical Change	3.39"	5 ft	5	SF	$75	$375
130983	593.8 to 603.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	$5,700
130984	605.5 to 613.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	$4,860
130985	614.1 to 629.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	$9,360

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091639	TULARE ST	E LINCOLN AVE	E CLEVELAND AVE	88

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130938	653.5 to 654.5 feet	Vertical Change	-.32"	5 ft	5	REF		
130986	654.4 to 657.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
130987	666.3 to 668.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
130939	666.7 to 667.7 feet	Vertical Change	.46"	5 ft	5	REF		
130988	668.3 to 669.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
130989	672.7 to 675.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
130990	678.3 to 686.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
130991	686.1 to 687.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
130940	686.2 to 687.2 feet	Vertical Change	-.35"	5 ft	5	REF		
130992	689.9 to 693.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
130993	694.1 to 701.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
130994	705.0 to 765.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	301	SF	$120	**$36,060**
130941	718.6 to 719.6 feet	Vertical Change	-.44"	5 ft	5	REF		
130942	720.3 to 721.3 feet	Vertical Change	1.19"	5 ft	5	REF		
130943	743.8 to 744.8 feet	Vertical Change	.36"	5 ft	5	REF		
130944	756.6 to 757.6 feet	Vertical Change	.28"	5 ft	5	REF		
130995	765.4 to 776.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
130996	778.3 to 784.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **E LINCOLN AVE** **$372,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202091633	TULARE ST	E RIVERSIDE DR	E LINCOLN AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130905	3.5 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
130906	11.3 to 24.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
130900	14.3 to 15.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
130907	25.9 to 30.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
130916	30.6 to 53.1 feet	Key Note Segment		5 ft	113			
130901	47.1 to 48.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
130908	53.6 to 118.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	322	SF	$120	**$38,640**
130902	111.1 to 112.1 feet	**Vertical Change**	.55"	5 ft	5	REF		
130909	120.9 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
130917	124.3 to 135.1 feet	Key Note Segment		5 ft	54			
130910	137.5 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
130918	139.0 to 159.5 feet	Key Note Segment		5 ft	103			
130903	164.2 to 165.2 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
130911	173.4 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
130912	192.3 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
130913	203.4 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
130914	217.3 to 232.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
130915	236.0 to 263.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
130904	256.1 to 257.1 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **E RIVERSIDE DR** **$93,735.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081600	TULARE ST	E SHERWOOD WAY	WESSMITH WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127790	0.4 to 16.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	62	SF	$120	**$7,488**
127791	16.8 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
127792	30.7 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	48	SF	$120	**$5,760**
127788	41.2 to 42.2 feet	**Vertical Change**	1.93"	4 ft	4	REF		
127789	43.0 to 44.0 feet	**Vertical Change**	-.3"	4 ft	4	REF		
127793	43.6 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,472**
127794	58.6 to 62.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
127795	63.7 to 66.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
127796	74.8 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
127797	80.8 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
127798	84.6 to 87.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
127799	90.3 to 104.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	56	SF	$120	**$6,768**
127800	104.4 to 108.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	16	SF	$120	**$1,872**
127801	108.8 to 122.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	53	SF	$120	**$6,384**
127802	124.3 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
127803	127.7 to 129.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$864**
127804	129.5 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,392**
127805	145.3 to 153.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	34	SF	$120	**$4,080**
127806	152.6 to 153.8 feet		5.0-6.0%	4 ft	5			

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **E SHERWOOD WAY** **$61,392.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202091617	TULARE ST	GARFIELD AVE	1128 TULARE ST	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
130829	0.8 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
130828	10.3 to 11.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
130830	11.4 to 14.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
130831	17.1 to 20.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
130832	20.5 to 41.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
130833	49.0 to 56.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
130834	59.2 to 62.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
130835	63.5 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
130836	67.7 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**

TOTAL COST FOR: W *side of* **TULARE ST** *Starting at:* **GARFIELD AVE** **$43,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081618	TULARE ST	WESSMITH WAY	WRENWOOD WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128046	1.1 to 25.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	96	SF	$120	**$11,568**
128056	25.8 to 45.4 feet	Key Note Segment		4 ft	78			
128047	50.2 to 51.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$672**
128057	54.0 to 72.7 feet	Key Note Segment		4 ft	75			
128048	72.8 to 73.9 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	4	SF	$40	**$176**
128049	76.3 to 86.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	42	SF	$120	**$4,992**
128050	87.3 to 95.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	34	SF	$120	**$4,032**
128051	96.8 to 99.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
128052	100.8 to 105.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	20	SF	$120	**$2,352**
128058	105.7 to 124.3 feet	Key Note Segment		4 ft	74			
128044	106.6 to 107.6 feet	**Vertical Change**	.36"	4 ft	4	REF		
128045	123.8 to 124.8 feet	**Vertical Change**	.53"	4 ft	4	REF		
128053	127.1 to 141.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
128054	141.6 to 144.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
128055	147.8 to 151.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **WESSMITH WAY** **$35,312.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202081636	TULARE ST	WRENWOOD WAY	1505 TULARE ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128294	0.6 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,480**
128291	2.5 to 3.5 feet	**Vertical Change**	3.05"	4 ft	4	REF		
128292	7.8 to 8.8 feet	**Vertical Change**	3.48"	4 ft	4	REF		
128295	16.3 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,408**
128296	27.5 to 44.4 feet	Key Note Segment		4 ft	68			
128293	44.3 to 45.3 feet	**Vertical Change**	.35"	4 ft	4	REF		

TOTAL COST FOR: E *side of* **TULARE ST** *Starting at:* **WRENWOOD WAY** **$9,888.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081213	TYLER LN	ADAMS AVE	TRUMAN DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126267	0.0 to 8.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
126268	8.5 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
126269	23.2 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
126259	23.6 to 24.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
126282	27.5 to 43.2 feet	Key Note Segment		5 ft	79			
126260	33.6 to 34.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
126261	39.8 to 40.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
126270	43.4 to 45.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	10	SF	$40	**$380**
126271	48.1 to 52.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
126283	54.5 to 69.2 feet	Key Note Segment		5 ft	74			
126272	69.2 to 73.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	19	SF	$40	**$780**
126273	73.1 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,480**
126274	117.1 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
126284	132.7 to 145.6 feet	Key Note Segment		5 ft	65			
126275	145.6 to 155.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	50	SF	$40	**$2,020**
126285	157.6 to 171.4 feet	Key Note Segment		5 ft	69			
126262	157.8 to 158.8 feet	**Vertical Change**	.43"	5 ft	5	REF		
126263	162.7 to 163.7 feet	**Vertical Change**	-.29"	5 ft	5	REF		
126264	200.4 to 201.4 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
126265	209.1 to 210.1 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
126276	214.8 to 218.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
126277	219.3 to 224.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
126278	225.5 to 234.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
126286	236.0 to 249.9 feet	Key Note Segment		5 ft	70			
126266	240.0 to 241.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
126279	249.9 to 251.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	9	SF	$40	**$340**
126280	260.1 to 261.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
126287	262.4 to 276.8 feet	Key Note Segment		5 ft	72			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081213	TYLER LN	ADAMS AVE	TRUMAN DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126281	284.6 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: S *side of* **TYLER LN** *Starting at:* **ADAMS AVE** **$54,970.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081300	TYLER LN	COOLIDGE ST	MONROE AVE	18

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126748	1.1 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
126749	12.9 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
126750	32.7 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	163	SF	$120	**$19,560**
126751	68.8 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
126752	86.3 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
126753	110.8 to 150.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,820**

TOTAL COST FOR: N *side of* **TYLER LN** *Starting at:* **COOLIDGE ST** **$73,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081157	TYLER LN	MADISON DR	ADAMS AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126169	0.0 to 4.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
126170	7.1 to 10.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
126190	10.8 to 25.7 feet	Key Note Segment		5 ft	75			
126171	29.8 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
126172	40.1 to 50.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
126191	50.2 to 69.5 feet	Key Note Segment		5 ft	97			
126154	50.5 to 51.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
126155	70.2 to 71.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
126173	70.4 to 76.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	29	SF	$40	**$1,160**
126174	78.6 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
126156	81.1 to 82.1 feet	**Vertical Change**	.83"	5 ft	5	REF		
126175	84.2 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
126176	97.7 to 104.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
126192	105.8 to 121.8 feet	Key Note Segment		5 ft	80			
126157	118.2 to 119.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
126177	125.9 to 133.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
126193	133.0 to 146.7 feet	Key Note Segment		5 ft	68			
126178	146.7 to 148.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	8	SF	$40	**$320**
126179	150.4 to 155.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
126180	155.9 to 186.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,360**
126158	187.6 to 188.6 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
126181	188.7 to 190.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
126182	192.7 to 202.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
126183	204.5 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
126194	210.3 to 224.4 feet	Key Note Segment		5 ft	71			
126159	215.8 to 216.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
126160	222.2 to 223.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
126184	224.7 to 229.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081157	TYLER LN	MADISON DR	ADAMS AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126161	228.3 to 229.3 feet	Vertical Change	.28"	5 ft	5	REF		
126185	229.6 to 235.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	$3,720
126163	236.6 to 237.6 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
126195	236.8 to 250.7 feet	Key Note Segment		5 ft	70			
126164	238.3 to 239.3 feet	Vertical Change	2.82"	5 ft	5	REF		
126165	241.9 to 242.9 feet	Vertical Change	3.42"	5 ft	5	REF		
126166	244.4 to 245.4 feet	Vertical Change	.34"	5 ft	5	REF		
126186	250.7 to 271.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	102	SF	$40	$4,080
126167	269.6 to 270.6 feet	Vertical Change	-.27"	5 ft	5	REF		
126187	271.1 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	$6,720
126168	287.0 to 288.0 feet	Vertical Change	-.46"	5 ft	5	LF	$75	$375
126196	288.6 to 302.6 feet	Key Note Segment		5 ft	70			
126188	310.3 to 313.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
126189	316.9 to 331.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	$8,940

TOTAL COST FOR: S *side of* **TYLER LN** *Starting at:* **MADISON DR** **$95,125.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081305	TYLER LN	MONROE AVE	MADISON DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126759	0.5 to 8.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
126760	12.7 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
126761	14.6 to 22.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
126762	23.8 to 49.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	130	SF	$120	**$15,540**
126773	49.8 to 66.0 feet	Key Note Segment		5 ft	81			
126763	66.0 to 69.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
126754	66.8 to 67.8 feet	**Vertical Change**	.53"	5 ft	5	REF		
126764	69.3 to 72.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
126765	74.3 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
126766	77.9 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	109	SF	$120	**$13,140**
126755	92.7 to 93.7 feet	**Vertical Change**	.42"	5 ft	5	REF		
126767	100.6 to 104.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
126756	101.3 to 102.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
126768	104.9 to 107.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
126769	111.5 to 115.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
126770	118.9 to 127.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
126757	127.4 to 128.4 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
126771	129.5 to 143.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
126772	150.3 to 152.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
126758	153.3 to 154.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **TYLER LN** *Starting at:* **MONROE AVE** **$63,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081258	TYLER LN	TRUMAN DR	COOLIDGE ST	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
126739	0.0 to 5.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
126740	5.8 to 11.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
126741	11.8 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,840**
126742	27.7 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
126743	38.4 to 41.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
126738	49.7 to 50.7 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
126744	97.6 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
126745	103.4 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
126746	123.0 to 144.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
126747	148.3 to 150.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: N *side of* **TYLER LN** *Starting at:* **TRUMAN DR** **$43,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111219	UMBER DR	AZURE DR	INDIGO DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133158	0.8 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,300**
133159	17.3 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
133160	23.8 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
133180	43.6 to 62.3 feet	Key Note Segment		5 ft	94			
133161	68.9 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
133162	84.4 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
133163	91.2 to 95.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
133164	100.6 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
133181	107.4 to 125.9 feet	Key Note Segment		5 ft	93			
133151	108.2 to 109.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
133165	128.8 to 133.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
133182	133.7 to 152.7 feet	Key Note Segment		5 ft	95			
133152	143.5 to 144.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
133166	154.3 to 155.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
133167	157.4 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
133168	166.9 to 173.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
133169	177.8 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
133183	194.6 to 213.4 feet	Key Note Segment		5 ft	94			
133184	221.1 to 238.6 feet	Key Note Segment		5 ft	88			
133154	239.0 to 240.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
133170	242.8 to 254.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
133171	274.7 to 282.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
133185	282.7 to 301.5 feet	Key Note Segment		5 ft	94			
133172	304.3 to 306.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
133186	309.3 to 327.3 feet	Key Note Segment		5 ft	90			
133173	330.3 to 331.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
133174	333.6 to 336.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
133175	340.2 to 346.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111219	UMBER DR	AZURE DR	INDIGO DR	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133176	349.5 to 353.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
133177	356.7 to 372.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
133187	373.6 to 391.6 feet	Key Note Segment		5 ft	90			
133155	381.6 to 382.6 feet	**Vertical Change**	.86"	5 ft	5	REF		
133156	389.4 to 390.4 feet	**Vertical Change**	1.47"	5 ft	5	REF		
133178	395.7 to 397.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
133188	398.2 to 417.7 feet	Key Note Segment		5 ft	98			
133157	404.0 to 405.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
133179	421.9 to 435.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

TOTAL COST FOR: S *side of* **UMBER DR** *Starting at:* **AZURE DR** **$96,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111232	UMBER DR	AZURE DR	SEPIA CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133207	6.9 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
133189	9.2 to 10.2 feet	**Vertical Change**	3.42"	5 ft	5	REF		
133190	14.6 to 15.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
133208	19.4 to 20.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
133209	24.4 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
133210	37.5 to 40.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
133211	40.3 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	162	SF	$120	**$19,440**
133191	48.8 to 49.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
133192	70.2 to 71.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
133212	74.2 to 87.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
133213	89.4 to 92.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
133214	94.0 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
133215	107.4 to 134.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
133193	116.2 to 117.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
133194	129.4 to 130.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
133195	136.1 to 137.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
133216	136.6 to 140.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
133196	142.2 to 143.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
133217	145.7 to 158.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
133218	158.9 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
133197	162.5 to 163.5 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
133219	166.6 to 185.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,460**
133220	185.8 to 203.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
133198	194.2 to 195.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
133221	208.1 to 224.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
133222	224.6 to 232.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
133223	234.3 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
133199	243.7 to 244.7 feet	**Vertical Change**	.69"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202111232	UMBER DR	AZURE DR	SEPIA CT	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133200	255.8 to 256.8 feet	Vertical Change	-.37"	5 ft	5	LF	$75	$375
133224	257.3 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	$14,100
133201	269.1 to 270.1 feet	Vertical Change	.41"	5 ft	5	REF		
133225	283.8 to 288.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
133226	291.3 to 296.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,180
133227	300.2 to 306.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,840
133202	308.1 to 309.1 feet	Vertical Change	-.27"	5 ft	5	LF	$75	$375
133228	316.2 to 379.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	318	SF	$120	$38,160
133203	317.0 to 318.0 feet	Vertical Change	.4"	5 ft	5	REF		
133204	324.6 to 325.6 feet	Vertical Change	1.1"	5 ft	5	REF		
133205	334.7 to 335.7 feet	Vertical Change	.3"	5 ft	5	REF		
133229	384.4 to 389.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
133230	394.7 to 398.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
133206	396.9 to 397.9 feet	Vertical Change	.34"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **UMBER DR** *Starting at:* **AZURE DR** **$184,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111215	UMBER DR	CURB RAMP	AZURE DR	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133137	0.0 to 10.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
133138	10.3 to 31.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
133139	35.9 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
133140	48.3 to 58.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
133141	63.0 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
133142	87.3 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
133136	91.2 to 92.2 feet	**Vertical Change**	2.26"	5 ft	5	SF	$75	**$375**
133143	98.3 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
133144	110.0 to 113.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
133145	115.5 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
133146	122.9 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
133147	132.9 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
133148	143.7 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
133149	158.0 to 193.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,480**
133150	196.5 to 202.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**

TOTAL COST FOR: N *side of* **UMBER DR** *Starting at:* **CURB RAMP** **$90,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202111212	UMBER DR	INDIGO DR	CURB RAMP	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133122	0.0 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
133123	5.1 to 12.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
133124	12.3 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
133125	38.7 to 41.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
133126	42.8 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
133127	58.7 to 60.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
133128	64.4 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
133129	73.7 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
133130	84.2 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
133135	90.3 to 91.3 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
133131	94.8 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
133132	112.8 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	209	SF	$120	**$25,080**
133133	157.0 to 164.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
133134	163.6 to 164.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **UMBER DR** *Starting at:* **INDIGO DR** **$75,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131414	UNIVERSITY AVE	CLAREMONT DR	ORCHARD AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98226	2.3 to 6.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
98227	9.6 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
98228	13.2 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98244	14.4 to 29.9 feet	Key Note Segment		5 ft	78			
98219	29.6 to 30.6 feet	**Vertical Change**	.91"	5 ft	5	REF		
98229	31.2 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
98230	35.8 to 40.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
98231	40.8 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98245	45.2 to 60.3 feet	Key Note Segment		5 ft	76			
98232	60.5 to 61.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
98233	65.0 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
98220	75.0 to 76.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
98234	90.1 to 91.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98246	92.6 to 110.6 feet	Key Note Segment		5 ft	90			
98235	110.6 to 119.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	44	SF	$40	**$1,740**
98221	110.8 to 111.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
98247	119.3 to 133.8 feet	Key Note Segment		5 ft	73			
98222	135.6 to 136.6 feet	**Vertical Change**	.96"	5 ft	5	SF	$75	**$375**
98236	140.0 to 143.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
98237	143.9 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
98238	162.7 to 168.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
98248	168.6 to 183.5 feet	Key Note Segment		5 ft	75			
98239	183.8 to 185.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
98224	185.9 to 186.9 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
98240	187.3 to 200.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
98241	200.5 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
98242	205.9 to 208.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
98243	208.7 to 212.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131414	UNIVERSITY AVE	CLAREMONT DR	ORCHARD AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98225	212.0 to 213.0 feet	Vertical Change	.74"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **CLAREMONT DR** **$43,725.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131539	UNIVERSITY AVE	HARVARD AVE	WILLIAMS AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99216	0.6 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
99194	11.0 to 12.0 feet	**Vertical Change**	.41"	5 ft	5	REF		
99217	21.9 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
99263	24.5 to 37.8 feet	Key Note Segment		5 ft	66			
99218	37.8 to 52.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	75	SF	$40	**$3,000**
99264	53.4 to 72.2 feet	Key Note Segment		5 ft	94			
99219	72.8 to 77.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
99195	75.2 to 76.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
99220	80.2 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
99221	93.6 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
99222	99.8 to 118.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
99223	119.7 to 128.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
99224	128.3 to 131.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
99265	131.6 to 146.2 feet	Key Note Segment		5 ft	73			
99196	138.1 to 139.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
99225	146.2 to 149.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$620**
99226	150.1 to 160.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
99266	161.4 to 175.3 feet	Key Note Segment		5 ft	70			
99197	162.1 to 163.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
99198	175.8 to 176.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
99227	176.3 to 190.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
99228	193.6 to 203.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
99229	204.8 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
99199	208.8 to 209.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
99230	209.3 to 211.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
99231	211.8 to 213.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
99232	215.8 to 223.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
99200	226.5 to 227.5 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131539	UNIVERSITY AVE	HARVARD AVE	WILLIAMS AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99233	226.8 to 229.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
99234	232.2 to 239.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
99201	237.0 to 238.0 feet	**Vertical Change**	-.62"	5 ft	5	REF		
99267	239.4 to 252.8 feet	Key Note Segment		5 ft	67			
99202	245.1 to 246.1 feet	**Vertical Change**	.46"	5 ft	5	REF		
99203	251.6 to 252.6 feet	**Vertical Change**	-.31"	5 ft	5	REF		
99235	253.7 to 256.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
99236	259.7 to 267.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
99268	269.3 to 283.2 feet	Key Note Segment		5 ft	70			
99204	275.7 to 276.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
99237	283.2 to 298.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	78	SF	$40	**$3,140**
99238	300.0 to 308.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
99239	309.4 to 315.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
99240	317.2 to 319.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
99241	321.6 to 324.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
99242	324.8 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
99243	337.6 to 344.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
99244	345.1 to 346.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
99269	346.4 to 361.2 feet	Key Note Segment		5 ft	74			
99205	350.6 to 351.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
99270	375.6 to 389.6 feet	Key Note Segment		5 ft	70			
99206	383.2 to 384.2 feet	**Vertical Change**	-.45"	5 ft	5	REF		
99245	397.9 to 416.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
99207	407.2 to 408.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
99246	423.0 to 424.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
99208	423.8 to 424.8 feet	**Vertical Change**	-.35"	5 ft	5	REF		
99247	426.9 to 442.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
99209	440.0 to 441.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131539	UNIVERSITY AVE	HARVARD AVE	WILLIAMS AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99248	446.3 to 450.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
99249	455.7 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
99271	458.6 to 472.8 feet	Key Note Segment		5 ft	71			
99250	473.5 to 482.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
99272	482.9 to 497.3 feet	Key Note Segment		5 ft	72			
99210	484.3 to 485.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
99251	497.3 to 510.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	67	SF	$40	**$2,660**
99211	498.1 to 499.1 feet	**Vertical Change**	-.41"	5 ft	5	REF		
99252	512.7 to 514.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
99253	514.7 to 515.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99254	518.3 to 538.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
99255	540.2 to 543.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
99256	543.6 to 547.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
99257	553.1 to 557.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
99258	560.3 to 565.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
99273	567.3 to 580.2 feet	Key Note Segment		5 ft	65			
99259	580.5 to 584.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
99212	581.5 to 582.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
99260	587.8 to 589.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
99274	595.1 to 609.5 feet	Key Note Segment		5 ft	72			
99213	605.6 to 606.6 feet	**Vertical Change**	.56"	5 ft	5	REF		
99261	609.5 to 612.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
99214	614.3 to 615.3 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
99215	622.3 to 623.3 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
99262	633.6 to 637.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: N *side of* **UNIVERSITY AVE** *Starting at:* **HARVARD AVE** **$179,370.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131408	UNIVERSITY AVE	HAYES CT	CLAREMONT DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98166	0.8 to 11.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
98167	12.6 to 21.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
98168	21.7 to 24.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
98169	25.7 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
98162	29.9 to 30.9 feet	**Vertical Change**	1.08"	5 ft	5	REF		
98177	36.1 to 78.8 feet	Key Note Segment		5 ft	214			
98170	78.8 to 84.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,200**
98171	89.7 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
98163	94.7 to 95.7 feet	**Vertical Change**	-.4"	5 ft	5	REF		
98172	109.8 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
98173	116.0 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
98178	117.8 to 133.0 feet	Key Note Segment		5 ft	76			
98164	126.8 to 127.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
98165	134.7 to 135.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
98174	135.7 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
98175	140.9 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
98179	149.4 to 165.7 feet	Key Note Segment		5 ft	82			
98176	166.5 to 182.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	79	SF	$40	**$3,160**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **HAYES CT** **$39,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121322	UNIVERSITY AVE	IMPERIAL DR	ROYAL DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95640	0.0 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
95655	4.7 to 27.0 feet	Key Note Segment		5 ft	112			
95628	5.6 to 6.6 feet	**Vertical Change**	.61"	5 ft	5	REF		
95629	17.6 to 18.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95630	27.2 to 28.2 feet	**Vertical Change**	.31"	5 ft	5	REF		
95631	28.9 to 29.9 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
95656	29.8 to 50.1 feet	Key Note Segment		5 ft	102			
95641	50.4 to 52.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	9	SF	$40	**$360**
95642	55.9 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
95643	67.3 to 73.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
95644	75.9 to 96.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,540**
95632	89.6 to 90.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
95645	100.2 to 101.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
95657	101.6 to 120.8 feet	Key Note Segment		5 ft	96			
95633	111.0 to 112.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
95646	121.7 to 128.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
95634	123.1 to 124.1 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
95658	128.8 to 149.7 feet	Key Note Segment		5 ft	104			
95647	151.8 to 153.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
95635	152.4 to 153.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
95648	153.8 to 155.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
95649	157.8 to 160.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
95650	162.0 to 172.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,540**
95651	175.7 to 181.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
95659	182.5 to 202.7 feet	Key Note Segment		5 ft	101			
95636	193.2 to 194.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
95652	203.9 to 210.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
95637	209.6 to 210.6 feet	**Vertical Change**	.46"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121322	UNIVERSITY AVE	IMPERIAL DR	ROYAL DR	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95653	210.7 to 218.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
95654	222.7 to 236.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
95660	233.4 to 234.6 feet		5.0-6.0%	5 ft	6			
95661	234.6 to 235.9 feet		6.0-7.0%	5 ft	7			
95639	236.0 to 237.0 feet	**Vertical Change**	.74"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **IMPERIAL DR** **$55,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121304	UNIVERSITY AVE	N SCHNOOR AVE	IMPERIAL DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95461	0.1 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
95462	3.4 to 7.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
95463	8.7 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
95452	13.9 to 14.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		
95478	15.7 to 45.3 feet	Key Note Segment		5 ft	148			
95453	26.9 to 27.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
95464	45.3 to 52.3 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	35	SF	$40	**$1,400**
95465	53.3 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
95466	56.8 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
95467	59.8 to 62.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
95479	63.2 to 84.5 feet	Key Note Segment		5 ft	107			
95454	74.6 to 75.6 feet	**Vertical Change**	.72"	5 ft	5	REF		
95468	85.3 to 112.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,320**
95455	95.0 to 96.0 feet	**Vertical Change**	-.58"	5 ft	5	REF		
95469	113.3 to 130.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
95470	132.0 to 145.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
95456	135.8 to 136.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
95480	145.8 to 166.7 feet	Key Note Segment		5 ft	104			
95471	167.0 to 171.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	24	SF	$40	**$960**
95472	171.8 to 176.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
95473	177.9 to 179.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
95474	182.3 to 201.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	95	SF	$120	**$11,400**
95457	182.8 to 183.8 feet	**Vertical Change**	-.58"	5 ft	5	REF		
95481	204.3 to 224.3 feet	Key Note Segment		5 ft	100			
95458	226.3 to 227.3 feet	**Vertical Change**	-.56"	5 ft	5	REF		
95475	226.8 to 230.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
95476	233.4 to 240.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
95482	240.0 to 261.0 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121304	UNIVERSITY AVE	N SCHNOOR AVE	IMPERIAL DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95477	263.4 to 283.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
95459	270.6 to 271.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
95460	283.3 to 284.3 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: N *side of* **UNIVERSITY AVE** *Starting at:* **N SCHNOOR AVE** **$83,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131404	UNIVERSITY AVE	N SCHNOOR AVE	HAYES CT	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98109	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
98110	2.8 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
98111	16.7 to 29.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
98112	30.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
98118	38.8 to 73.0 feet	Key Note Segment		5 ft	171			
98113	75.0 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
98119	80.8 to 125.7 feet	Key Note Segment		5 ft	225			
98106	113.0 to 114.0 feet	**Vertical Change**	1.88"	5 ft	5	REF		
98114	125.7 to 129.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$720**
98115	132.8 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98116	136.3 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
98107	139.8 to 140.8 feet	**Vertical Change**	.68"	5 ft	5	REF		
98108	148.6 to 155.7 feet	**Vertical Change**	.26"	5 ft	35	LF	$75	**$2,663**
98117	151.4 to 156.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **N SCHNOOR AVE** **$37,942.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131546	UNIVERSITY AVE	ORCHARD AVE	N SCHNOOR AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99315	0.3 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
99316	15.9 to 21.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
99317	21.9 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
99318	23.2 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
99366	26.8 to 41.8 feet	Key Note Segment		5 ft	75			
99319	43.7 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
99320	48.7 to 78.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
99321	80.8 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
99367	81.8 to 96.8 feet	Key Note Segment		5 ft	75			
99322	96.8 to 107.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,040**
99368	110.8 to 126.1 feet	Key Note Segment		5 ft	77			
99298	118.0 to 119.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
99323	127.7 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
99324	139.7 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
99325	141.5 to 148.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
99326	149.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
99327	163.0 to 164.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
99369	164.8 to 178.5 feet	Key Note Segment		5 ft	69			
99299	165.9 to 166.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
99328	179.8 to 184.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
99329	185.1 to 186.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99330	190.0 to 211.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
99331	215.9 to 216.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
99370	218.0 to 233.8 feet	Key Note Segment		5 ft	79			
99332	233.8 to 239.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	29	SF	$40	**$1,160**
99333	241.1 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
99300	248.4 to 249.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
99334	269.8 to 274.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131546	UNIVERSITY AVE	ORCHARD AVE	N SCHNOOR AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99371	276.4 to 290.3 feet	Key Note Segment		5 ft	70			
99335	292.1 to 294.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
99336	297.4 to 302.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
99337	304.8 to 320.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
99338	323.3 to 329.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
99372	329.3 to 344.6 feet	Key Note Segment		5 ft	77			
99301	337.4 to 338.4 feet	**Vertical Change**	-.46"	5 ft	5	REF		
99302	339.2 to 340.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
99339	346.0 to 352.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
99340	354.8 to 356.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
99341	356.8 to 361.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
99303	362.7 to 363.7 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
99342	376.1 to 380.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
99343	384.1 to 386.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
99304	387.8 to 388.8 feet	**Vertical Change**	1"	5 ft	5	REF		
99344	388.5 to 414.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
99305	399.9 to 400.9 feet	**Vertical Change**	-.82"	5 ft	5	REF		
99373	414.1 to 435.5 feet	Key Note Segment		5 ft	107			
99306	415.0 to 416.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
99345	435.5 to 439.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
99346	439.6 to 442.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
99347	446.8 to 452.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
99348	452.3 to 461.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
99307	458.3 to 459.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
99349	465.4 to 478.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
99308	475.5 to 476.5 feet	**Vertical Change**	.3"	5 ft	5	REF		
99350	480.8 to 490.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
99309	493.1 to 494.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131546	UNIVERSITY AVE	ORCHARD AVE	N SCHNOOR AVE	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99374	494.8 to 517.7 feet	Key Note Segment		5 ft	115			
99310	508.0 to 509.0 feet	Vertical Change	.26"	5 ft	5	REF		
99351	517.7 to 519.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	7	SF	$40	$280
99352	520.6 to 523.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,920
99311	527.4 to 528.4 feet	Vertical Change	-.38"	5 ft	5	REF		
99353	527.4 to 529.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
99354	533.8 to 537.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,460
99355	541.1 to 548.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320
99356	550.8 to 563.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,680
99357	566.2 to 571.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	$3,300
99375	573.4 to 599.2 feet	Key Note Segment		5 ft	129			
99358	600.0 to 608.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
99312	605.3 to 606.3 feet	Vertical Change	.27"	5 ft	5	REF		
99359	615.2 to 616.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$660
99360	620.3 to 633.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	$8,100
99376	635.3 to 649.6 feet	Key Note Segment		5 ft	72			
99361	649.6 to 666.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	82	SF	$40	$3,280
99313	653.3 to 654.3 feet	Vertical Change	.72"	5 ft	5	REF		
99362	672.3 to 677.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
99363	679.8 to 685.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
99364	688.6 to 693.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	$3,060
99365	694.3 to 696.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
99314	698.3 to 699.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375

TOTAL COST FOR: N *side of* **UNIVERSITY AVE** *Starting at:* **ORCHARD AVE** **$202,865.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131419	UNIVERSITY AVE	ORCHARD AVE	WILLIAMS AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98281	0.3 to 6.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,480**
98282	6.8 to 8.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
98283	9.8 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,100**
98284	23.3 to 25.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
98297	25.6 to 39.3 feet	Key Note Segment		5 ft	68			
98276	40.1 to 41.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
98285	40.6 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
98298	54.1 to 67.8 feet	Key Note Segment		5 ft	69			
98277	57.2 to 58.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
98286	67.8 to 72.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
98287	82.7 to 84.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
98288	86.5 to 94.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
98299	94.8 to 114.3 feet	Key Note Segment		5 ft	98			
98289	115.1 to 119.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
98290	120.7 to 127.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	36	SF	$120	**$4,260**
98291	129.5 to 134.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
98292	138.1 to 146.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
98300	146.2 to 159.8 feet	Key Note Segment		5 ft	68			
98278	147.3 to 148.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
98293	161.6 to 162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
98279	171.3 to 174.1 feet	**Vertical Change**	.58"	5 ft	14	REF		
98294	172.3 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
98301	176.0 to 191.6 feet	Key Note Segment		5 ft	78			
98295	192.3 to 200.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	43	SF	$40	**$1,720**
98296	200.9 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
98280	215.7 to 216.7 feet	**Vertical Change**	.69"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **ORCHARD AVE** **$53,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121301	UNIVERSITY AVE	ROYAL DR	N SCHNOOR AVE	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95445	0.4 to 5.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
95446	5.9 to 20.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,700**
95447	20.4 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
95448	30.1 to 38.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,740**
95449	40.3 to 48.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
95443	51.7 to 52.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
95450	52.3 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
95451	54.8 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
95444	68.6 to 69.6 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **ROYAL DR** **$31,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201131541	UNIVERSITY AVE	WILLIAMS AVE	ORCHARD AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99280	0.6 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
99281	12.2 to 18.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
99282	22.7 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
99283	31.3 to 32.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
99293	34.4 to 53.6 feet	Key Note Segment		5 ft	96			
99275	49.4 to 50.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
99284	59.8 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
99294	88.4 to 102.2 feet	Key Note Segment		5 ft	69			
99276	103.1 to 104.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
99285	103.8 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
99286	112.1 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
99295	114.1 to 128.4 feet	Key Note Segment		5 ft	72			
99287	150.2 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
99277	156.2 to 157.2 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
99288	161.0 to 164.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
99289	166.7 to 176.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
99290	178.3 to 185.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
99291	188.0 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
99296	190.5 to 205.3 feet	Key Note Segment		5 ft	74			
99292	205.8 to 223.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
99278	212.1 to 213.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
99297	222.2 to 223.3 feet		5.0-6.0%	5 ft	6			
99279	223.2 to 224.2 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **UNIVERSITY AVE** *Starting at:* **WILLIAMS AVE** **$39,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131426	UNIVERSITY AVE	WILLIAMS AVE	WILLIS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98330	1.3 to 12.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
98331	12.1 to 22.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
98320	23.9 to 24.9 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
98332	25.3 to 26.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
98346	26.5 to 39.9 feet	Key Note Segment		5 ft	67			
98333	40.2 to 50.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	53	SF	$40	**$2,140**
98321	42.1 to 43.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
98347	51.0 to 65.2 feet	Key Note Segment		5 ft	71			
98322	59.4 to 60.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
98334	66.3 to 75.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
98323	71.9 to 72.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
98335	76.9 to 85.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
98336	86.3 to 95.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
98324	88.1 to 89.1 feet	**Vertical Change**	-.47"	5 ft	5	REF		
98348	97.6 to 117.3 feet	Key Note Segment		5 ft	99			
98325	98.9 to 99.9 feet	**Vertical Change**	.47"	5 ft	5	REF		
98326	115.8 to 116.8 feet	**Vertical Change**	.68"	5 ft	5	REF		
98337	119.0 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
98338	124.8 to 142.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	**$10,740**
98339	142.7 to 146.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
98340	147.3 to 148.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
98349	148.6 to 162.3 feet	Key Note Segment		5 ft	69			
98327	149.8 to 150.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
98341	162.5 to 172.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	51	SF	$40	**$2,020**
98328	171.8 to 172.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
98350	172.6 to 186.8 feet	Key Note Segment		5 ft	71			
98342	187.0 to 190.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	15	SF	$40	**$600**
98343	190.0 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131426	UNIVERSITY AVE	WILLIAMS AVE	WILLIS AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98344	197.1 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
98345	206.2 to 211.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
98329	216.7 to 217.7 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **WILLIAMS AVE** **$60,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131434	UNIVERSITY AVE	WILLIS AVE	HARVARD AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98390	0.0 to 5.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,480**
98391	6.3 to 12.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
98392	12.6 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
98393	17.6 to 23.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,660**
98377	21.4 to 22.4 feet	**Vertical Change**	.63"	5 ft	5	SF	$75	**$375**
98419	23.7 to 45.3 feet	Key Note Segment		5 ft	108			
98378	32.1 to 33.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
98394	47.2 to 48.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
98395	49.9 to 50.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
98396	54.3 to 60.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
98420	60.5 to 75.1 feet	Key Note Segment		5 ft	73			
98397	75.6 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
98379	77.5 to 78.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
98398	81.8 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
98399	86.7 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
98400	94.5 to 99.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
98401	100.3 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
98380	104.6 to 105.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
98402	108.4 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	151	SF	$120	**$18,180**
98421	138.8 to 152.1 feet	Key Note Segment		5 ft	66			
98403	152.1 to 163.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	58	SF	$40	**$2,300**
98381	155.9 to 159.5 feet	**Vertical Change**	.28"	5 ft	18	REF		
98404	165.8 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
98422	167.8 to 181.4 feet	Key Note Segment		5 ft	68			
98405	183.5 to 187.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
98406	187.4 to 209.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
98407	209.6 to 221.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
98408	221.4 to 224.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201131434	UNIVERSITY AVE	WILLIS AVE	HARVARD AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98382	227.1 to 228.1 feet	Vertical Change	-.31"	5 ft	5	REF		
98409	227.4 to 230.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
98410	230.5 to 233.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
98411	235.4 to 245.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
98383	238.3 to 239.3 feet	Vertical Change	-.28"	5 ft	5	REF		
98423	245.9 to 260.3 feet	Key Note Segment		5 ft	72			
98412	260.5 to 263.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	14	SF	$40	**$560**
98384	260.8 to 261.8 feet	Vertical Change	.3"	5 ft	5	REF		
98413	265.7 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
98424	269.6 to 288.8 feet	Key Note Segment		5 ft	96			
98414	288.8 to 315.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	135	SF	$40	**$5,420**
98385	314.0 to 315.0 feet	Vertical Change	.28"	5 ft	5	REF		
98415	316.9 to 323.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
98425	324.3 to 337.7 feet	Key Note Segment		5 ft	67			
98386	328.9 to 329.9 feet	Vertical Change	-.35"	5 ft	5	REF		
98416	337.7 to 352.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	75	SF	$40	**$2,980**
98387	338.4 to 339.4 feet	Vertical Change	.33"	5 ft	5	REF		
98417	353.9 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
98388	355.5 to 356.5 feet	Vertical Change	.41"	5 ft	5	REF		
98418	381.7 to 382.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98426	383.4 to 399.2 feet	Key Note Segment		5 ft	79			
98389	399.9 to 400.9 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **UNIVERSITY AVE** *Starting at:* **WILLIS AVE** **$110,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201232	VALENCIA AVE	GEORGIA AVE	SAN BRUNO AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105241	1.6 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
105237	2.1 to 3.1 feet	**Vertical Change**	.49"	5 ft	5	REF		
105242	33.7 to 34.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
105243	36.8 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
105244	41.6 to 49.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
105245	52.1 to 55.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
105238	56.3 to 57.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
105246	56.5 to 58.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
105247	64.5 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
105248	77.6 to 80.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
105239	97.3 to 98.3 feet	**Vertical Change**	-.54"	5 ft	5	SF	$75	**$375**
105240	118.9 to 119.9 feet	**Vertical Change**	1.03"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: SE *side of* **VALENCIA AVE** *Starting at:* **GEORGIA AVE** **$32,550.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201144	VALENCIA AVE	GEORGIA CT	GEORGIA AVE	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104890	0.2 to 15.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
104891	16.2 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**

TOTAL COST FOR: NW *side of* **VALENCIA AVE** *Starting at:* **GEORGIA CT** **$15,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191534	VALENCIA AVE	NAVEL AVE	SAUNDERS AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104212	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
104213	2.4 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
104214	15.8 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
104223	29.8 to 30.8 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
104208	31.5 to 32.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
104215	33.2 to 36.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
104216	36.8 to 43.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
104209	50.4 to 51.4 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
104217	51.8 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
104210	53.5 to 54.5 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
104218	56.2 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
104211	58.6 to 59.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
104219	71.5 to 95.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,100**
104220	96.8 to 121.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
104221	122.3 to 145.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	114	SF	$120	**$13,740**
104222	145.2 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **NAVEL AVE** **$75,759.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191421	VALENCIA AVE	NAVEL AVE	PERKINS AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103632	0.4 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
103633	4.3 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	**$20,580**
103630	30.2 to 31.2 feet	**Vertical Change**	3.15"	5 ft	5	REF		
103634	39.9 to 57.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,260**
103635	59.8 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
103636	66.3 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
103637	72.7 to 78.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
103631	74.1 to 75.1 feet	**Vertical Change**	1.12"	5 ft	5	REF		
103638	81.3 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
103639	85.1 to 89.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
103640	91.8 to 125.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	168	SF	$120	**$20,160**
103641	125.4 to 150.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$14,940**

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **NAVEL AVE** **$79,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191505	VALENCIA AVE	PARKWOOD AVE	PERKINS AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103962	0.5 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
103963	7.0 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
103964	14.7 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
103965	25.8 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
103966	32.8 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,160**
103961	52.1 to 53.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
103967	57.6 to 87.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,700**
103968	87.5 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
103969	108.3 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
103970	122.2 to 124.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **PARKWOOD AVE** **$63,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191426	VALENCIA AVE	PARKWOOD AVE	STANFORD AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103667	6.2 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
103658	6.4 to 7.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
103659	15.9 to 16.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
103660	23.4 to 24.4 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
103668	27.0 to 28.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
103661	29.6 to 30.6 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
103669	33.9 to 39.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
103670	40.0 to 48.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
103662	41.0 to 42.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
103671	52.1 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
103663	57.1 to 60.6 feet	**Vertical Change**	.53"	5 ft	18	REF		
103672	58.2 to 59.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
103673	65.6 to 67.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
103674	67.8 to 72.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
103675	74.8 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
103676	79.9 to 110.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	153	SF	$120	**$18,420**
103664	101.3 to 102.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
103677	112.8 to 120.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
103665	118.5 to 119.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
103678	122.3 to 126.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
103679	126.3 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
103666	127.1 to 128.1 feet	**Vertical Change**	.46"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **PARKWOOD AVE** **$54,930.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191256	VALENCIA AVE	PECAN AVE	SAUNDERS AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103233	0.0 to 22.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	112	SF	$120	**$13,440**
103232	12.3 to 13.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
103234	25.3 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	226	SF	$120	**$27,060**
103235	72.7 to 74.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
103236	77.8 to 102.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,640**

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **PECAN AVE** **$55,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191508	VALENCIA AVE	PERKINS AVE	NAVEL AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103975	0.6 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
103976	22.3 to 33.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
103977	35.2 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
103978	61.0 to 67.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
103979	67.3 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
103971	90.5 to 91.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
103980	99.8 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
103982	119.5 to 120.5 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
103983	133.4 to 134.4 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
103981	134.2 to 148.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
103972	141.8 to 142.8 feet	**Vertical Change**	.39"	5 ft	5	REF		
103984	145.5 to 146.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
103973	147.2 to 148.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
103974	149.4 to 150.4 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **PERKINS AVE** **$80,232.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191423	VALENCIA AVE	PERKINS AVE	PARKWOOD AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103648	0.0 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
103642	21.3 to 22.3 feet	**Vertical Change**	.76"	5 ft	5	REF		
103643	25.0 to 26.0 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
103649	28.7 to 32.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
103644	31.9 to 32.9 feet	**Vertical Change**	3.55"	5 ft	5	REF		
103650	36.3 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
103651	69.5 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
103652	78.7 to 82.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
103653	100.1 to 106.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
103654	107.3 to 117.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
103655	120.7 to 123.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
103656	131.3 to 137.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
103646	140.7 to 141.7 feet	**Vertical Change**	-.39"	5 ft	5	REF		
103657	140.7 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
103647	144.8 to 145.8 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **PERKINS AVE** **$46,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201136	VALENCIA AVE	SAN BRUNO AVE	GEORGIA CT	22

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104854	0.3 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
104855	11.3 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
104856	22.3 to 31.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: NW *side of* **VALENCIA AVE** *Starting at:* **SAN BRUNO AVE** **$14,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201422	VALENCIA AVE	SAN BRUNO AVE	SAN DIEGO AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105808	21.9 to 35.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$7,980**
105805	22.0 to 23.0 feet	**Vertical Change**	.9"	5 ft	5	REF		
105806	27.3 to 28.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
105807	30.1 to 34.1 feet	**Vertical Change**	.58"	5 ft	20	REF		
105809	35.2 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: SE *side of* **VALENCIA AVE** *Starting at:* **SAN BRUNO AVE** **$10,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191431	VALENCIA AVE	SAN CARLOS AVE	STANFORD AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103720	0.9 to 13.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
103707	5.9 to 6.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
103721	14.3 to 33.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	97	SF	$120	**$11,700**
103709	21.3 to 22.3 feet	**Vertical Change**	.71"	5 ft	5	REF		
103710	24.4 to 25.4 feet	**Vertical Change**	.37"	5 ft	5	REF		
103722	35.7 to 38.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
103723	40.1 to 45.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
103711	44.6 to 45.6 feet	**Vertical Change**	2.64"	5 ft	5	REF		
103724	45.0 to 60.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
103712	53.4 to 54.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
103725	61.0 to 65.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
103726	65.5 to 97.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,020**
103713	98.8 to 99.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
103727	99.4 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
103728	102.1 to 112.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
103714	105.7 to 106.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
103715	108.2 to 109.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
103729	113.1 to 120.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
103716	116.2 to 117.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
103717	119.6 to 120.6 feet	**Vertical Change**	1.32"	5 ft	5	REF		
103718	125.2 to 128.1 feet	**Vertical Change**	.48"	5 ft	15	LF	$75	**$1,088**
103730	127.9 to 134.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
103731	134.3 to 142.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
103719	140.0 to 141.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
103732	144.4 to 148.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **SAN CARLOS AVE** **$79,027.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201111	VALENCIA AVE	SAN CARLOS AVE	SAN JOSE AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104772	1.3 to 6.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
104764	7.6 to 8.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
104773	8.5 to 76.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	340	SF	$120	**$40,860**
104765	16.3 to 17.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
104766	25.0 to 26.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
104767	33.6 to 34.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
104774	78.2 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
104768	79.3 to 80.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
104775	87.5 to 91.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
104776	91.9 to 96.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
104777	100.1 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
104769	102.1 to 106.1 feet	**Vertical Change**	.29"	5 ft	20	REF		
104778	109.0 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
104779	142.7 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
104770	142.9 to 143.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
104771	152.9 to 153.9 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **SAN CARLOS AVE** **$71,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2201201116	VALENCIA AVE	SAN DIEGO AVE	SAN BRUNO AVE	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104807	0.5 to 13.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
104804	11.5 to 12.5 feet	**Vertical Change**	.41"	5 ft	5	REF		
104808	17.7 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,180**
104805	40.7 to 41.7 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
104809	42.3 to 44.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
104806	44.3 to 45.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **VALENCIA AVE** *Starting at:* **SAN DIEGO AVE** **$21,870.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2201201424	VALENCIA AVE	SAN DIEGO AVE	SAN RAMON AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
105814	0.4 to 15.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
105810	11.9 to 12.9 feet	**Vertical Change**	-.43"	5 ft	5	REF		
105815	16.0 to 28.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
105811	24.8 to 25.8 feet	**Vertical Change**	-.37"	5 ft	5	REF		
105816	28.0 to 34.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
105817	35.0 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
105812	38.5 to 39.5 feet	**Vertical Change**	1.17"	5 ft	5	REF		
105818	40.8 to 47.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
105819	47.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
105820	53.3 to 56.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
105821	59.7 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
105813	60.0 to 61.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
105822	64.3 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**

TOTAL COST FOR: SE *side of* **VALENCIA AVE** *Starting at:* **SAN DIEGO AVE** **$34,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201446	VALENCIA AVE	SAN JOSE AVE	SAN CARLOS AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106021	0.0 to 12.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
106015	10.1 to 11.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
106022	14.9 to 16.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
106023	16.5 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
106016	35.9 to 36.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
106024	36.5 to 46.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
106025	50.2 to 58.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
106026	62.3 to 68.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
106017	67.8 to 68.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
106027	70.3 to 73.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
106028	80.2 to 93.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
106018	81.3 to 82.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
106029	96.6 to 103.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,020**
106030	105.8 to 131.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	126	SF	$120	**$15,120**
106019	123.7 to 124.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
106031	131.0 to 140.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
106032	143.2 to 147.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
106033	147.5 to 149.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
106020	149.2 to 150.2 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **SAN JOSE AVE** **$62,760.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201201114	VALENCIA AVE	SAN JOSE AVE	SAN DIEGO AVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104787	0.4 to 26.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,420**
104788	26.5 to 33.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
104789	33.8 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
104790	57.7 to 86.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	144	SF	$120	**$17,280**
104791	86.9 to 97.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
104780	90.3 to 91.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
104792	97.9 to 104.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
104793	106.6 to 111.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
104794	115.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
104795	126.6 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
104796	134.5 to 149.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
104781	143.5 to 144.5 feet	**Vertical Change**	-.32"	5 ft	5	REF		
104783	151.3 to 152.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
104784	164.3 to 165.3 feet	**Vertical Change**	.95"	5 ft	5	SF	$75	**$375**
104797	169.3 to 171.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
104798	171.1 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
104799	182.0 to 184.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
104785	186.8 to 187.8 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
104800	194.5 to 198.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
104786	198.4 to 199.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
104801	198.8 to 208.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
104802	210.3 to 214.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
104803	224.9 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **SAN JOSE AVE** **$95,805.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201201444	VALENCIA AVE	SAN RAMON AVE	SAN JOSE AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
106005	2.8 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	204	SF	$120	**$24,420**
105998	19.1 to 20.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
106006	44.1 to 52.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
105999	52.1 to 53.1 feet	**Vertical Change**	.5"	5 ft	5	REF		
106007	53.6 to 60.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	34	SF	$120	**$4,020**
106000	58.6 to 59.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
106008	60.5 to 70.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,700**
106001	67.5 to 68.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
106009	70.0 to 72.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
106010	73.3 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	168	SF	$120	**$20,100**
106011	110.9 to 116.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
106012	117.0 to 125.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
106002	121.7 to 122.7 feet	**Vertical Change**	.75"	5 ft	5	REF		
106003	124.3 to 125.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
106004	127.0 to 128.0 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
106013	128.1 to 139.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
106014	139.7 to 142.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **SAN RAMON AVE** **$78,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191536	VALENCIA AVE	SAUNDERS AVE	PECAN AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
104225	0.0 to 39.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	200	SF	$120	**$23,940**
104226	40.2 to 57.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,380**
104227	59.7 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
104224	65.4 to 66.4 feet	**Vertical Change**	.32"	5 ft	5	REF		
104228	93.8 to 99.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
104229	100.4 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **SAUNDERS AVE** **$55,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191310	VALENCIA AVE	SAUNDERS AVE	NAVEL AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103269	0.4 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
103270	17.2 to 24.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
103271	26.7 to 54.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
103272	57.8 to 59.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
103273	62.3 to 72.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
103274	72.4 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
103275	86.2 to 117.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	158	SF	$120	**$18,960**
103265	106.0 to 107.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
103276	121.3 to 123.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
103277	127.4 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
103278	137.9 to 142.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
103267	141.1 to 142.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
103279	145.2 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
103268	146.5 to 147.5 feet	**Vertical Change**	-.63"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **SAUNDERS AVE** **$70,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201191433	VALENCIA AVE	STANFORD AVE	PARKWOOD AVE	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103738	0.0 to 1.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
103733	2.0 to 3.0 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
103739	4.6 to 20.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
103734	10.4 to 11.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
103740	23.1 to 33.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	54	SF	$120	**$6,480**
103741	33.9 to 35.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
103742	35.4 to 46.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
103743	52.9 to 73.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	102	SF	$120	**$12,240**
103744	73.6 to 79.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
103745	79.9 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
103746	97.8 to 135.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	190	SF	$120	**$22,800**
103735	113.7 to 114.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
103747	136.2 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
103736	139.5 to 140.5 feet	**Vertical Change**	-.38"	5 ft	5	REF		
103748	141.4 to 150.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**

TOTAL COST FOR: E *side of* **VALENCIA AVE** *Starting at:* **STANFORD AVE** **$82,050.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201191428	VALENCIA AVE	STANFORD AVE	SAN CARLOS AVE	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
103695	0.3 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
103680	10.2 to 11.2 feet	**Vertical Change**	1.65"	5 ft	5	REF		
103681	12.1 to 13.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
103696	17.9 to 20.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
103697	21.2 to 25.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
103683	22.4 to 23.4 feet	**Vertical Change**	.62"	5 ft	5	REF		
103684	28.8 to 32.8 feet	**Vertical Change**	.4"	5 ft	20	LF	$75	**$1,500**
103698	30.4 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
103699	37.5 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
103685	39.9 to 40.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
103686	42.4 to 43.4 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
103687	44.9 to 45.9 feet	**Vertical Change**	-.74"	5 ft	5	SF	$75	**$375**
103700	46.0 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
103688	47.4 to 50.3 feet	**Vertical Change**	.44"	5 ft	15	REF		
103689	53.3 to 54.3 feet	**Vertical Change**	.48"	5 ft	5	LF	$75	**$375**
103701	57.8 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
103690	58.1 to 59.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
103691	63.6 to 64.6 feet	**Vertical Change**	-.51"	5 ft	5	REF		
103692	69.3 to 70.3 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
103693	72.4 to 76.0 feet	**Vertical Change**	.32"	5 ft	18	REF		
103702	72.8 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
103703	75.5 to 96.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
103694	84.6 to 85.6 feet	**Vertical Change**	.7"	5 ft	5	REF		
103704	99.5 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	215	SF	$120	**$25,800**
103705	147.4 to 152.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
103706	152.8 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**

TOTAL COST FOR: W *side of* **VALENCIA AVE** *Starting at:* **STANFORD AVE** **$72,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111559	VALLEY WAY	2412 VALLEY WAY	WILLOW CT	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93099	0.5 to 14.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
93100	15.8 to 18.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
93101	21.8 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93097	44.6 to 45.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
93102	45.8 to 59.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
93098	62.6 to 63.6 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
93103	69.3 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
93104	78.1 to 79.1 feet		6.0-7.0%	5 ft	5			

TOTAL COST FOR: E *side of* **VALLEY WAY** *Starting at:* **2412 VALLEY WAY** **$25,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131338	VALLEY WAY	DRIFTWOOD DR	RIVERVIEW DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97842	0.7 to 13.4 feet	Key Note Segment		5 ft	64			
97795	13.9 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
97843	16.7 to 30.0 feet	Key Note Segment		5 ft	67			
97796	31.8 to 33.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
97844	33.5 to 47.3 feet	Key Note Segment		5 ft	69			
97797	47.3 to 56.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	44	SF	$40	**$1,760**
97798	61.9 to 63.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
97845	63.7 to 78.3 feet	Key Note Segment		5 ft	73			
97799	84.5 to 86.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
97846	86.4 to 100.5 feet	Key Note Segment		5 ft	71			
97800	103.3 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
97801	114.8 to 122.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,320**
97847	122.0 to 135.3 feet	Key Note Segment		5 ft	67			
97802	138.3 to 139.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
97848	141.1 to 154.9 feet	Key Note Segment		5 ft	69			
97788	151.1 to 152.1 feet	Vertical Change	.32"	5 ft	5	REF		
97803	155.9 to 170.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,460**
97804	170.0 to 174.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
97805	176.6 to 177.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
97849	178.5 to 192.5 feet	Key Note Segment		5 ft	70			
97806	192.5 to 196.6 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	21	SF	$40	**$820**
97850	196.9 to 211.1 feet	Key Note Segment		5 ft	71			
97807	211.1 to 222.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	56	SF	$40	**$2,240**
97808	226.2 to 230.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
97809	232.9 to 236.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
97789	235.8 to 236.8 feet	Vertical Change	.27"	5 ft	5	REF		
97810	240.5 to 241.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
97811	241.5 to 243.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131338	VALLEY WAY	DRIFTWOOD DR	RIVERVIEW DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97851	243.6 to 257.4 feet	Key Note Segment		5 ft	69			
97812	259.2 to 263.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
97852	263.6 to 275.4 feet	Key Note Segment		5 ft	59			
97813	276.0 to 277.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
97814	279.9 to 291.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
97790	280.3 to 281.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
97853	291.1 to 305.0 feet	Key Note Segment		5 ft	69			
97815	305.0 to 306.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
97854	308.8 to 322.8 feet	Key Note Segment		5 ft	70			
97791	321.3 to 322.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
97816	322.8 to 324.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
97817	325.0 to 327.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
97818	330.0 to 347.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
97855	347.8 to 361.2 feet	Key Note Segment		5 ft	67			
97819	361.6 to 365.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
97856	365.5 to 378.5 feet	Key Note Segment		5 ft	65			
97820	383.1 to 386.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
97821	386.6 to 394.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
97822	397.4 to 402.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
97857	403.6 to 417.2 feet	Key Note Segment		5 ft	68			
97823	418.6 to 421.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
97858	421.4 to 434.8 feet	Key Note Segment		5 ft	67			
97824	435.5 to 451.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
97825	453.8 to 455.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
97826	456.2 to 458.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
97859	459.3 to 473.1 feet	Key Note Segment		5 ft	69			
97827	473.1 to 476.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	19	SF	$40	**$740**
97860	476.8 to 490.7 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131338	VALLEY WAY	DRIFTWOOD DR	RIVERVIEW DR	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97828	495.0 to 513.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
97861	513.4 to 529.3 feet	Key Note Segment		5 ft	79			
97829	529.3 to 532.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
97862	532.8 to 548.7 feet	Key Note Segment		5 ft	80			
97830	548.7 to 556.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	36	SF	$40	**$1,460**
97831	558.5 to 568.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,240**
97832	570.0 to 572.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
97863	572.2 to 585.6 feet	Key Note Segment		5 ft	67			
97833	587.8 to 588.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
97864	589.9 to 602.1 feet	Key Note Segment		5 ft	61			
97834	602.1 to 611.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	48	SF	$40	**$1,940**
97835	614.4 to 617.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
97792	616.5 to 617.5 feet	**Vertical Change**	.31"	5 ft	5	REF		
97836	617.1 to 627.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
97865	627.9 to 640.6 feet	Key Note Segment		5 ft	64			
97837	644.0 to 645.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
97793	644.6 to 645.6 feet	**Vertical Change**	-.81"	5 ft	5	REF		
97866	646.3 to 658.9 feet	Key Note Segment		5 ft	63			
97838	659.9 to 661.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
97794	660.0 to 663.9 feet	**Vertical Change**	.53"	5 ft	20	REF		
97839	662.3 to 664.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
97840	667.5 to 668.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
97841	678.0 to 681.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: E *side of* **VALLEY WAY** *Starting at:* **DRIFTWOOD DR** **$124,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111607	VALLEY WAY	HOLIDAY CT	NATIONAL AVE	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93198	0.0 to 3.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
93199	7.0 to 14.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
93200	19.0 to 63.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	221	SF	$120	**$26,520**
93197	51.4 to 52.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
93201	63.2 to 67.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,340**
93202	67.1 to 71.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
93203	74.3 to 78.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
93204	78.5 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
93205	88.6 to 99.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
93206	106.8 to 119.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
93207	121.9 to 126.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,580**
93208	128.0 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
93209	129.9 to 147.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
93210	147.1 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,020**

TOTAL COST FOR: E *side of* **VALLEY WAY** *Starting at:* **HOLIDAY CT** **$78,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111628	VALLEY WAY	NATIONAL AVE	304 VALLEY WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93429	0.9 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
93430	8.0 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
93431	17.2 to 23.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,960**
93466	26.8 to 38.0 feet	Key Note Segment		5 ft	56			
93411	36.8 to 37.8 feet	**Vertical Change**	.44"	5 ft	5	REF		
93432	38.0 to 39.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$260**
93433	39.3 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
93434	46.1 to 48.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
93435	49.1 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
93467	52.4 to 63.0 feet	Key Note Segment		5 ft	53			
93412	63.6 to 64.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
93436	64.7 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,340**
93437	73.6 to 79.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
93468	79.4 to 97.1 feet	Key Note Segment		5 ft	88			
93413	98.2 to 99.2 feet	**Vertical Change**	.41"	5 ft	5	REF		
93438	98.6 to 105.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
93439	107.3 to 110.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
93414	107.5 to 108.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
93440	113.3 to 132.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	97	SF	$120	**$11,580**
93441	134.0 to 148.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
93469	148.3 to 167.8 feet	Key Note Segment		5 ft	97			
93415	157.8 to 158.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
93442	167.9 to 171.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	17	SF	$40	**$660**
93443	202.9 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
93416	207.8 to 208.8 feet	**Vertical Change**	-.45"	5 ft	5	REF		
93444	208.1 to 212.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
93445	215.9 to 233.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	90	SF	$120	**$10,740**
93417	216.8 to 217.8 feet	**Vertical Change**	-.51"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111628	VALLEY WAY	NATIONAL AVE	304 VALLEY WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93446	235.5 to 236.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
93418	236.3 to 237.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
93447	241.2 to 248.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
93470	249.1 to 267.0 feet	Key Note Segment		5 ft	90			
93419	252.7 to 253.7 feet	**Vertical Change**	.34"	5 ft	5	REF		
93448	267.0 to 273.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	33	SF	$40	**$1,300**
93420	273.8 to 274.8 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
93449	276.3 to 280.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
93450	281.8 to 287.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
93451	288.4 to 293.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93471	293.6 to 310.4 feet	Key Note Segment		5 ft	84			
93452	310.4 to 318.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	43	SF	$40	**$1,700**
93421	322.0 to 323.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
93422	328.3 to 329.3 feet	**Vertical Change**	-.66"	5 ft	5	SF	$75	**$375**
93453	333.6 to 335.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
93454	347.9 to 353.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
93455	353.5 to 355.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
93472	356.0 to 378.5 feet	Key Note Segment		5 ft	113			
93456	379.2 to 386.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
93423	379.3 to 380.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
93457	387.1 to 407.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,120**
93458	408.4 to 420.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
93424	408.7 to 409.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
93425	417.3 to 418.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
93459	424.9 to 431.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
93473	431.7 to 450.0 feet	Key Note Segment		5 ft	92			
93426	450.8 to 451.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
93460	451.1 to 466.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201111628	VALLEY WAY	NATIONAL AVE	304 VALLEY WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93461	469.2 to 473.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
93427	477.9 to 478.9 feet	**Vertical Change**	2.28"	5 ft	5	SF	$75	**$375**
93428	486.6 to 487.6 feet	**Vertical Change**	-.69"	5 ft	5	SF	$75	**$375**
93474	492.3 to 516.1 feet	Key Note Segment		5 ft	119			
93462	516.1 to 517.7 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	8	SF	$40	**$320**
93463	519.1 to 533.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	**$8,520**
93464	533.3 to 535.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
93465	542.2 to 556.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
93475	554.3 to 557.1 feet		5.0-6.0%	5 ft	14			
93476	554.3 to 557.1 feet	Running Slope	5.0-6.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: W *side of* **VALLEY WAY** *Starting at:* **NATIONAL AVE** **$153,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131328	VALLEY WAY	PINEWOOD DR	DRIFTWOOD DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97672	0.4 to 6.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
97673	6.3 to 8.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
97671	6.4 to 7.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
97674	11.1 to 12.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,020**
97675	13.2 to 15.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
97676	17.6 to 26.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
97677	28.4 to 31.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
97678	32.4 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
97679	37.1 to 39.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
97692	39.0 to 53.1 feet	Key Note Segment		5 ft	71			
97680	54.6 to 79.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,640**
97693	80.0 to 93.8 feet	Key Note Segment		5 ft	69			
97681	94.8 to 112.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,680**
97694	112.6 to 125.9 feet	Key Note Segment		5 ft	67			
97682	126.7 to 128.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
97683	131.3 to 136.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
97684	136.7 to 150.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
97695	150.5 to 164.0 feet	Key Note Segment		5 ft	68			
97685	164.0 to 181.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	87	SF	$40	**$3,460**
97686	184.2 to 187.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
97687	189.1 to 198.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
97688	198.1 to 204.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
97689	208.6 to 233.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	122	SF	$120	**$14,640**
97690	235.4 to 252.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
97691	255.1 to 263.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**

TOTAL COST FOR: W *side of* **VALLEY WAY** *Starting at:* **PINEWOOD DR** **$100,120.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131313	VALLEY WAY	RIVERVIEW DR	PINEWOOD DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97514	0.0 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
97515	9.7 to 12.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
97507	9.9 to 10.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
97516	13.1 to 16.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
97547	16.5 to 19.8 feet		6.0-7.0%	5 ft	17			
97548	16.5 to 19.8 feet	Running Slope	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
97517	17.5 to 23.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
97518	23.8 to 27.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
97519	30.1 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
97520	35.2 to 58.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,100**
97508	60.4 to 61.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
97521	61.3 to 62.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
97522	65.2 to 77.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**
97523	80.3 to 86.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,600**
97524	87.4 to 89.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
97509	94.2 to 95.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
97525	94.5 to 95.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
97526	97.8 to 103.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
97541	103.8 to 116.5 feet	Key Note Segment		5 ft	64			
97510	105.4 to 106.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
97527	117.0 to 119.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
97542	121.0 to 133.8 feet	Key Note Segment		5 ft	64			
97528	133.8 to 136.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	14	SF	$40	**$580**
97511	138.2 to 139.2 feet	**Vertical Change**	1.35"	5 ft	5	REF		
97529	139.1 to 143.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
97530	147.1 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$12,000**
97512	162.3 to 163.3 feet	**Vertical Change**	2.64"	5 ft	5	REF		
97531	167.6 to 168.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131313	VALLEY WAY	RIVERVIEW DR	PINEWOOD DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97543	168.9 to 182.8 feet	Key Note Segment		5 ft	70			
97532	182.8 to 187.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	22	SF	$40	$860
97544	187.1 to 199.4 feet	Key Note Segment		5 ft	62			
97533	200.3 to 205.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,360
97534	207.8 to 214.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
97535	216.8 to 218.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
97536	218.8 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	$5,220
97537	228.9 to 234.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,420
97545	234.6 to 247.3 feet	Key Note Segment		5 ft	64			
97538	249.4 to 252.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
97546	252.4 to 264.3 feet	Key Note Segment		5 ft	60			
97513	253.9 to 254.9 feet	Vertical Change	.42"	5 ft	5	REF		
97539	266.6 to 272.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
97540	275.8 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200

TOTAL COST FOR: W *side of* **VALLEY WAY** *Starting at:* **RIVERVIEW DR** **$94,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111603	VALLEY WAY	WILLOW CT	HOLIDAY CT	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93146	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
93139	3.8 to 4.8 feet	**Vertical Change**	.47"	5 ft	5	REF		
93147	8.1 to 15.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
93148	15.4 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
93140	25.9 to 26.9 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
93149	38.3 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
93150	47.9 to 63.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
93141	61.7 to 62.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
93151	63.5 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
93142	67.5 to 68.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
93152	68.0 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
93153	75.8 to 80.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93154	91.3 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
93143	91.7 to 92.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
93155	100.9 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
93156	110.8 to 113.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
93157	113.8 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
93158	127.3 to 142.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
93159	142.3 to 145.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
93144	145.2 to 146.2 feet	**Vertical Change**	.5"	5 ft	5	REF		
93160	145.8 to 151.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
93145	152.7 to 153.7 feet	**Vertical Change**	3.2"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **VALLEY WAY** *Starting at:* **WILLOW CT** **$63,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108130937	VARBELLA PK	LA PERLA LN	VARBELLA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61281	0.0 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	214	SF	$120	**$25,680**
61282	45.4 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
61283	56.3 to 61.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
61284	64.9 to 71.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
61285	72.2 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
61286	83.8 to 94.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
61287	97.0 to 98.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
61309	98.7 to 118.3 feet	Key Note Segment		5 ft	98			
61288	118.8 to 126.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
61289	127.2 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
61310	132.4 to 152.3 feet	Key Note Segment		5 ft	100			
61290	153.3 to 155.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
61291	155.0 to 156.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
61292	159.5 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	197	SF	$120	**$23,580**
61293	198.8 to 205.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
61277	199.5 to 200.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
61311	205.8 to 226.1 feet	Key Note Segment		5 ft	102			
61278	225.7 to 226.7 feet	**Vertical Change**	-.35"	5 ft	5	REF		
61294	227.1 to 229.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
61295	231.6 to 234.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,500**
61296	234.1 to 235.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
61312	235.2 to 255.3 feet	Key Note Segment		5 ft	101			
61280	245.3 to 246.3 feet	**Vertical Change**	.5"	5 ft	5	REF		
61297	255.6 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
61298	274.4 to 290.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,720**
61299	293.2 to 300.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
61300	303.3 to 305.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
61313	308.7 to 329.6 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108130937	VARBELLA PK	LA PERLA LN	VARBELLA WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61301	330.1 to 334.9 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	24	SF	$40	$960
61314	334.9 to 354.9 feet	Key Note Segment		5 ft	100			
61302	355.0 to 372.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	87	SF	$40	$3,460
61303	372.7 to 387.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	$8,580
61304	389.4 to 395.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	$3,360
61305	395.4 to 396.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
61306	400.5 to 403.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
61307	403.8 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,700
61315	408.6 to 428.6 feet	Key Note Segment		5 ft	100			
61308	428.9 to 435.5 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	33	SF	$40	$1,320

TOTAL COST FOR: E *side of* **VARBELLA PK** *Starting at:* **LA PERLA LN** **$141,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131222	VARBELLA PK	LAS CASAS LN	LA PERLA LN	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62491	0.7 to 84.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	421	SF	$120	**$50,520**
62492	87.0 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
62493	97.9 to 121.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
62489	118.6 to 119.6 feet	**Vertical Change**	.36"	5 ft	5	REF		
62494	123.7 to 129.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
62495	132.6 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
62496	142.8 to 145.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
62497	150.9 to 159.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
62490	156.3 to 157.3 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **VARBELLA PK** *Starting at:* **LAS CASAS LN** **$85,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108131220	VARBELLA PK	LOS ARCOS LN	LAS CASAS LN	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62474	0.3 to 1.3 feet	Vertical Change	-.4"	5 ft	5	REF		
62476	1.0 to 17.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
62477	23.0 to 62.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	199	SF	$120	**$23,880**
62478	64.9 to 66.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
62479	70.8 to 73.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
62475	74.6 to 75.6 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
62480	76.1 to 78.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	13	SF	$120	**$1,500**
62481	82.3 to 89.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	35	SF	$120	**$4,200**
62482	90.2 to 91.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
62483	94.3 to 104.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	53	SF	$120	**$6,360**
62484	107.6 to 108.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
62485	112.8 to 117.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
62486	118.2 to 119.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
62487	120.3 to 131.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	**$6,600**
62488	132.8 to 160.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,560**

TOTAL COST FOR: E *side of* **VARBELLA PK** *Starting at:* **LOS ARCOS LN** **$77,355.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108130952	VARBELLA PK	VARBELLA WAY	LOS ARCOS LN	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61362	0.0 to 24.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,700**
61410	24.5 to 44.4 feet	Key Note Segment		5 ft	100			
61363	45.2 to 47.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
61364	49.7 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**
61411	54.3 to 73.9 feet	Key Note Segment		5 ft	98			
61365	74.3 to 80.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	33	SF	$40	**$1,320**
61366	81.2 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
61367	99.6 to 120.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,420**
61368	120.3 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
61349	121.1 to 122.1 feet	Vertical Change	.26"	5 ft	5	REF		
61412	123.0 to 143.9 feet	Key Note Segment		5 ft	105			
61369	144.6 to 149.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
61370	150.8 to 157.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
61413	157.3 to 176.8 feet	Key Note Segment		5 ft	97			
61371	177.7 to 204.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**
61414	204.8 to 225.3 feet	Key Note Segment		5 ft	103			
61350	205.4 to 206.4 feet	Vertical Change	-.26"	5 ft	5	REF		
61351	215.2 to 216.2 feet	Vertical Change	.35"	5 ft	5	REF		
61352	220.8 to 221.8 feet	Vertical Change	.91"	5 ft	5	REF		
61372	225.8 to 249.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,100**
61373	252.7 to 256.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
61415	256.3 to 276.5 feet	Key Note Segment		5 ft	101			
61374	276.9 to 278.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
61375	280.8 to 285.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
61376	289.1 to 299.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	50	SF	$120	**$6,060**
61377	299.2 to 325.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
61353	305.5 to 306.5 feet	Vertical Change	-.34"	5 ft	5	REF		
61378	328.4 to 333.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108130952	VARBELLA PK	VARBELLA WAY	LOS ARCOS LN	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61416	333.6 to 354.3 feet	Key Note Segment		5 ft	104			
61354	354.1 to 355.1 feet	Vertical Change	.32"	5 ft	5	REF		
61379	355.8 to 362.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
61417	363.3 to 382.9 feet	Key Note Segment		5 ft	98			
61380	390.8 to 402.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	$6,780
61381	402.1 to 412.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	$6,120
61382	412.5 to 421.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	$5,580
61383	422.1 to 429.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	$4,620
61384	432.8 to 436.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
61418	438.0 to 457.8 feet	Key Note Segment		5 ft	99			
61355	448.3 to 449.3 feet	Vertical Change	.3"	5 ft	5	REF		
61385	459.5 to 461.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
61386	463.1 to 466.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
61419	466.1 to 486.7 feet	Key Note Segment		5 ft	103			
61387	486.8 to 489.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	$500
61388	489.3 to 491.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,200
61389	493.6 to 514.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	$12,420
61420	514.6 to 535.2 feet	Key Note Segment		5 ft	103			
61356	515.6 to 516.6 feet	Vertical Change	.26"	5 ft	5	REF		
61390	535.2 to 539.6 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	22	SF	$40	$880
61391	540.3 to 558.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	90	SF	$120	$10,800
61392	560.5 to 565.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	$3,180
61421	565.8 to 585.8 feet	Key Note Segment		5 ft	100			
61357	576.3 to 577.3 feet	Vertical Change	.28"	5 ft	5	REF		
61393	586.8 to 615.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	$17,040
61394	619.3 to 638.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	$11,400
61358	622.8 to 623.8 feet	Vertical Change	.35"	5 ft	5	REF		
61359	635.3 to 636.3 feet	Vertical Change	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108130952	VARBELLA PK	VARBELLA WAY	LOS ARCOS LN	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61395	638.3 to 641.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
61422	644.4 to 664.6 feet	Key Note Segment		5 ft	101			
61396	665.4 to 666.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
61397	669.1 to 691.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	111	SF	$120	**$13,320**
61360	685.7 to 686.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
61423	691.3 to 711.8 feet	Key Note Segment		5 ft	103			
61398	712.5 to 717.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	26	SF	$40	**$1,020**
61399	719.9 to 721.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
61424	721.3 to 741.7 feet	Key Note Segment		5 ft	102			
61400	741.8 to 752.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	56	SF	$40	**$2,220**
61401	752.9 to 755.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
61402	756.8 to 762.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
61403	764.3 to 798.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	169	SF	$120	**$20,220**
61425	798.3 to 819.1 feet	Key Note Segment		5 ft	104			
61361	809.2 to 810.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
61404	819.5 to 822.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
61426	824.1 to 844.9 feet	Key Note Segment		5 ft	104			
61405	848.0 to 861.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	69	SF	$120	**$8,220**
61406	862.6 to 873.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
61407	874.3 to 880.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
61427	881.9 to 901.7 feet	Key Note Segment		5 ft	99			
61408	904.6 to 920.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
61409	921.1 to 923.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: W *side of* **VARBELLA PK** *Starting at:* **VARBELLA WAY** **$275,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108130945	VARBELLA WAY	ROOSEVELT AVE	VARBELLA PK	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61343	2.0 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
61344	20.8 to 40.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,880**
61345	44.5 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
61346	57.1 to 60.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
61347	62.0 to 63.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
61348	67.4 to 79.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,380**

TOTAL COST FOR: S *side of* **VARBELLA WAY** *Starting at:* **ROOSEVELT AVE** **$36,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108130939	VARBELLA WAY	VARBELLA PK	ROOSEVELT AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61320	0.3 to 9.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
61321	10.3 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61322	21.6 to 23.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
61316	22.3 to 23.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
61334	23.5 to 45.2 feet	Key Note Segment		5 ft	109			
61317	24.6 to 25.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
61318	35.1 to 36.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
61335	48.8 to 68.8 feet	Key Note Segment		5 ft	100			
61323	68.8 to 70.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$260**
61324	71.8 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61325	75.9 to 88.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,500**
61326	88.4 to 91.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
61327	91.9 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
61328	106.4 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
61336	117.2 to 132.1 feet	Key Note Segment		5 ft	75			
61319	125.1 to 126.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
61329	132.5 to 136.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
61330	140.7 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
61337	142.8 to 156.9 feet	Key Note Segment		5 ft	70			
61331	158.0 to 163.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
61332	167.3 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
61333	181.2 to 182.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **VARBELLA WAY** *Starting at:* **VARBELLA PK** **$39,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201251350	VENTURI AVE	1808 VENTURI AVE	ORCHARD AVE	91

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108486	0.0 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
108487	11.0 to 31.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
108481	14.4 to 15.4 feet	**Vertical Change**	.47"	5 ft	5	REF		
108482	19.0 to 20.0 feet	**Vertical Change**	3.34"	5 ft	5	REF		
108483	29.7 to 32.9 feet	**Vertical Change**	.51"	5 ft	16	REF		
108488	34.3 to 44.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
108489	45.8 to 52.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
108490	54.3 to 58.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
108491	61.6 to 122.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	303	SF	$120	**$36,360**
108484	100.3 to 101.3 feet	**Vertical Change**	-.32"	5 ft	5	REF		
108492	122.6 to 134.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
108493	134.7 to 138.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
108494	138.7 to 146.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
108495	151.8 to 154.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
108496	154.0 to 169.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
108497	170.5 to 179.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
108485	171.1 to 172.1 feet	**Vertical Change**	2.7"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **VENTURI AVE** *Starting at:* **1808 VENTURI AVE** **$98,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W/S	2201121511	VENTURI CT	2497 VENTURI CT	MAINBERRY DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96921	0.0 to 2.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
96922	2.6 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,720**
96915	6.1 to 7.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
96923	27.3 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
96933	29.1 to 50.6 feet	Key Note Segment		5 ft	108			
96916	40.4 to 41.4 feet	**Vertical Change**	.51"	5 ft	5	REF		
96924	58.9 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
96917	66.2 to 67.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
96925	77.9 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
96926	82.6 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,200**
96927	121.7 to 125.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
96934	126.4 to 149.6 feet	Key Note Segment		5 ft	116			
96918	127.2 to 128.2 feet	**Vertical Change**	.39"	5 ft	5	REF		
96928	170.7 to 178.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
96929	178.7 to 202.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
96919	194.0 to 195.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
96935	202.9 to 223.1 feet	Key Note Segment		5 ft	101			
96930	224.3 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
96936	227.8 to 258.5 feet	Key Note Segment		5 ft	154			
96931	260.8 to 276.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
96932	276.6 to 282.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
96920	282.3 to 283.3 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W/S *side of* **VENTURI CT** *Starting at:* **2497 VENTURI CT** **$79,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121508	VENTURI CT	MAINBERRY DR	2485 VENTURI CT	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96908	0.5 to 11.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
96909	12.1 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
96914	22.2 to 43.4 feet	Key Note Segment		5 ft	106			
96907	43.6 to 44.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
96910	44.4 to 46.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
96911	51.5 to 53.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
96912	53.7 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
96913	60.6 to 69.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**

TOTAL COST FOR: N *side of* **VENTURI CT** *Starting at:* **MAINBERRY DR** **$23,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191037	VERDE MESA WAY	CORONA DR	RANCHO SANTA FE DR	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72992	0.5 to 11.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,102**
72993	15.3 to 20.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,862**
72994	25.3 to 50.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	115	SF	$120	**$13,824**
72995	53.0 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,942**
72996	63.8 to 74.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,670**
72997	75.9 to 90.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,668**
72998	93.8 to 105.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,372**
72999	105.8 to 134.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,714**
73000	136.7 to 139.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,242**
72991	139.8 to 140.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$338**

TOTAL COST FOR: N *side of* **VERDE MESA WAY** *Starting at:* **CORONA DR** **$63,733.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191051	VERDE MESA WAY	RANCHO SANTA FE DR	SAN GABRIEL DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73114	2.8 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
73146	9.3 to 26.4 feet	Key Note Segment		5 ft	85			
73105	19.0 to 20.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
73115	32.4 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
73116	36.0 to 37.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
73147	42.8 to 60.9 feet	Key Note Segment		5 ft	91			
73117	63.9 to 65.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
73118	65.4 to 67.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
73119	69.3 to 70.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
73148	71.7 to 93.3 feet	Key Note Segment		5 ft	108			
73106	91.9 to 92.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
73120	95.4 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
73121	116.6 to 132.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,360**
73122	132.2 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
73123	143.9 to 157.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
73149	157.9 to 177.4 feet	Key Note Segment		5 ft	98			
73107	177.0 to 178.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
73124	178.4 to 184.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
73150	184.6 to 204.5 feet	Key Note Segment		5 ft	100			
73108	194.8 to 195.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
73109	204.1 to 205.1 feet	**Vertical Change**	-.27"	5 ft	5	REF		
73125	204.8 to 214.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
73126	218.4 to 235.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
73127	237.9 to 261.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
73151	261.3 to 280.1 feet	Key Note Segment		5 ft	94			
73110	279.6 to 280.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
73128	281.2 to 288.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
73152	288.3 to 308.5 feet	Key Note Segment		5 ft	101			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110191051	VERDE MESA WAY	RANCHO SANTA FE DR	SAN GABRIEL DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
73129	310.0 to 325.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
73130	330.7 to 353.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
73131	355.9 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
73153	364.6 to 383.8 feet	Key Note Segment		5 ft	96			
73132	384.7 to 390.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73154	390.5 to 410.4 feet	Key Note Segment		5 ft	100			
73133	413.7 to 421.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
73134	423.3 to 429.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
73135	439.1 to 459.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
73136	463.0 to 467.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
73155	467.7 to 486.7 feet	Key Note Segment		5 ft	95			
73137	489.9 to 491.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
73156	495.0 to 515.8 feet	Key Note Segment		5 ft	104			
73111	495.9 to 496.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
73138	515.8 to 541.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	127	SF	$40	**$5,060**
73139	541.5 to 543.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
73140	548.2 to 551.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
73141	551.5 to 557.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
73142	559.8 to 567.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
73143	568.1 to 572.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
73157	572.5 to 591.9 feet	Key Note Segment		5 ft	97			
73144	592.2 to 597.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	25	SF	$40	**$1,000**
73112	597.4 to 600.6 feet	**Vertical Change**	.26"	5 ft	16	LF	$75	**$1,200**
73158	598.9 to 618.3 feet	Key Note Segment		5 ft	97			
73113	617.9 to 618.9 feet	**Vertical Change**	.3"	5 ft	5	REF		
73145	619.0 to 637.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**

TOTAL COST FOR: S *side of* **VERDE MESA WAY** *Starting at:* **RANCHO SANTA FE DR** **$171,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191035	VERDE MESA WAY	SAN GABRIEL DR	CORONA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72960	0.0 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,348**
72961	7.1 to 13.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,402**
72948	7.6 to 8.6 feet	**Vertical Change**	-.63"	5 ft	5	REF		
72962	15.5 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,728**
72982	18.9 to 38.9 feet	Key Note Segment		5 ft	90			
72950	28.4 to 29.4 feet	**Vertical Change**	.36"	5 ft	5	REF		
72963	43.8 to 52.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,428**
72964	55.7 to 58.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,458**
72965	58.6 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,458**
72966	63.4 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,996**
72983	71.3 to 91.2 feet	Key Note Segment		5 ft	90			
72967	91.6 to 96.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,754**
72968	100.6 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$648**
72984	101.8 to 121.8 feet	Key Note Segment		5 ft	90			
72969	122.6 to 134.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,534**
72985	134.7 to 147.6 feet	Key Note Segment		5 ft	58			
72970	150.8 to 159.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,914**
72971	160.2 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,076**
72972	172.3 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
72986	179.6 to 199.2 feet	Key Note Segment		5 ft	88			
72951	198.9 to 199.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
72973	199.4 to 218.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	85	SF	$40	**$3,384**
72974	221.0 to 231.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,616**
72987	231.5 to 251.8 feet	Key Note Segment		5 ft	91			
72952	232.7 to 233.7 feet	**Vertical Change**	-.32"	5 ft	5	REF		
72953	241.9 to 242.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
72975	252.2 to 257.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	25	SF	$40	**$1,008**
72988	257.8 to 277.9 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2110191035	VERDE MESA WAY	SAN GABRIEL DR	CORONA DR	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
72954	267.9 to 268.9 feet	Vertical Change	.26"	5 ft	5	REF		
72955	278.0 to 279.0 feet	Vertical Change	.27"	5 ft	5	REF		
72976	278.9 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,886**
72956	288.1 to 289.1 feet	Vertical Change	.35"	5 ft	5	REF		
72977	291.4 to 309.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,612**
72957	298.6 to 299.6 feet	Vertical Change	.3"	5 ft	5	REF		
72978	310.4 to 312.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
72979	318.8 to 331.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
72989	334.7 to 354.6 feet	Key Note Segment		5 ft	90			
72958	335.6 to 336.6 feet	Vertical Change	.3"	5 ft	5	REF		
72980	355.6 to 361.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,078**
72990	361.3 to 380.8 feet	Key Note Segment		5 ft	88			
72959	362.5 to 363.5 feet	Vertical Change	.28"	5 ft	5	REF		
72981	382.3 to 399.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,018**

TOTAL COST FOR: N *side of* **VERDE MESA WAY** *Starting at:* **SAN GABRIEL DR** **$88,524.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170951	VIA CAPITOLA	3714 VIA CAPITOLA	VIA CERIONI	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88316	0.3 to 5.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
88317	5.2 to 18.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,220**
88315	5.8 to 6.8 feet	**Vertical Change**	.45"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **VIA CAPITOLA** *Starting at:* **3714 VIA CAPITOLA** **$11,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170950	VIA CAPITOLA	CAITLAN DRIVE	3714 VIA CAPITOLA	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88292	1.3 to 14.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,800**
88293	17.1 to 23.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,900**
88309	23.6 to 46.0 feet	Key Note Segment		5 ft	112			
88287	35.1 to 36.1 feet	**Vertical Change**	-.33"	5 ft	5	REF		
88294	48.7 to 57.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
88295	60.0 to 61.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
88310	61.6 to 80.9 feet	Key Note Segment		5 ft	97			
88288	71.8 to 72.8 feet	**Vertical Change**	.3"	5 ft	5	REF		
88296	84.8 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,600**
88297	108.0 to 111.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
88298	111.3 to 112.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88311	117.8 to 140.2 feet	Key Note Segment		5 ft	112			
88289	119.2 to 120.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
88290	123.8 to 124.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
88291	129.7 to 130.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
88299	141.3 to 145.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
88300	145.1 to 160.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	77	SF	$120	**$9,180**
88301	160.4 to 173.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
88312	176.3 to 197.3 feet	Key Note Segment		5 ft	105			
88302	199.6 to 203.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
88303	204.3 to 208.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
88304	210.7 to 222.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
88305	228.2 to 234.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
88313	234.3 to 254.3 feet	Key Note Segment		5 ft	100			
88306	257.6 to 272.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
88307	274.2 to 283.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
88308	286.3 to 287.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
88314	287.9 to 309.0 feet	Key Note Segment		5 ft	106			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170950	VIA CAPITOLA	CAITLAN DRIVE	3714 VIA CAPITOLA	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR: S	*side of* **VIA CAPITOLA**	*Starting at:* **CAITLAN DRIVE**						**$83,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170954	VIA CAPITOLA	VIA CERIONI	CAITLAN DRIVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88323	7.7 to 12.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
88345	12.3 to 41.3 feet	Key Note Segment		5 ft	145			
88318	31.8 to 32.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
88324	44.8 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
88325	54.0 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
88346	77.0 to 96.8 feet	Key Note Segment		5 ft	99			
88320	87.6 to 88.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
88326	98.4 to 101.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
88327	105.5 to 110.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
88328	115.8 to 124.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
88321	123.7 to 124.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
88329	124.1 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
88347	134.3 to 155.3 feet	Key Note Segment		5 ft	105			
88330	160.4 to 165.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
88331	165.4 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
88348	173.3 to 192.7 feet	Key Note Segment		5 ft	97			
88332	193.7 to 205.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
88333	205.7 to 208.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
88334	210.4 to 211.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88335	212.8 to 216.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
88336	219.1 to 227.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
88337	227.3 to 228.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
88338	231.7 to 238.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
88339	238.6 to 249.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
88349	249.8 to 269.2 feet	Key Note Segment		5 ft	97			
88322	260.3 to 261.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
88340	272.1 to 275.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
88341	279.6 to 282.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170954	VIA CAPITOLA	VIA CERIONI	CAITLAN DRIVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88350	283.0 to 304.5 feet	Key Note Segment		5 ft	108			
88342	307.0 to 313.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
88343	319.2 to 328.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,460**
88344	328.3 to 332.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: N *side of* **VIA CAPITOLA** *Starting at:* **VIA CERIONI** **$84,900.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161016	VIA CERIONI	45 VIA CERIONI	SUNSET AVE	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84977	1.4 to 19.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	73	SF	$120	**$8,736**
84978	21.3 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
84979	28.0 to 53.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	104	SF	$120	**$12,432**
84980	56.3 to 63.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
84975	64.5 to 65.5 feet	**Vertical Change**	.35"	4 ft	4	LF	$75	**$300**
84981	67.5 to 81.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	55	SF	$120	**$6,624**
84976	79.9 to 80.9 feet	**Vertical Change**	.59"	4 ft	4	REF		
84982	81.3 to 94.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	53	SF	$120	**$6,384**
84983	97.0 to 99.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,248**

TOTAL COST FOR: E *side of* **VIA CERIONI** *Starting at:* **45 VIA CERIONI** **$39,996.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171010	VIA CERIONI	SUNSET AVE	VIA DE ORO	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88456	0.8 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88457	7.8 to 20.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
88458	27.5 to 42.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,120**
88442	30.4 to 31.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
88459	43.5 to 47.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
88460	51.3 to 62.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
88494	62.9 to 91.1 feet	Key Note Segment		5 ft	141			
88461	94.4 to 97.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
88462	97.7 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,560**
88495	123.1 to 144.8 feet	Key Note Segment		5 ft	109			
88443	143.9 to 144.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
88463	145.8 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
88464	154.9 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
88444	168.7 to 169.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
88496	178.5 to 199.3 feet	Key Note Segment		5 ft	104			
88465	201.8 to 216.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
88466	219.3 to 220.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
88467	222.8 to 224.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88468	228.6 to 229.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
88469	232.1 to 236.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
88470	236.6 to 246.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
88471	252.3 to 255.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
88497	255.8 to 275.7 feet	Key Note Segment		5 ft	100			
88445	266.5 to 267.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
88472	277.3 to 281.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
88473	283.8 to 284.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
88498	285.6 to 307.3 feet	Key Note Segment		5 ft	108			
88474	309.7 to 337.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	138	SF	$120	**$16,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171010	VIA CERIONI	SUNSET AVE	VIA DE ORO	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88499	339.0 to 361.5 feet	Key Note Segment		5 ft	113			
88475	363.9 to 393.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	146	SF	$120	**$17,460**
88476	396.5 to 397.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
88477	399.8 to 401.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
88478	402.8 to 405.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
88479	408.8 to 413.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
88447	410.1 to 411.1 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
88480	415.6 to 416.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
88500	416.7 to 437.1 feet	Key Note Segment		5 ft	102			
88448	417.2 to 418.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
88449	427.7 to 428.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
88450	438.1 to 439.1 feet	**Vertical Change**	-.45"	5 ft	5	LF	$75	**$375**
88481	439.8 to 441.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
88451	443.1 to 444.1 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
88501	447.3 to 467.8 feet	Key Note Segment		5 ft	103			
88452	458.7 to 459.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
88482	469.8 to 473.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
88483	473.9 to 476.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
88484	479.8 to 495.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
88485	498.8 to 502.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
88453	499.7 to 500.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
88502	502.8 to 522.2 feet	Key Note Segment		5 ft	97			
88454	513.6 to 514.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
88486	523.3 to 525.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
88487	529.4 to 533.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
88488	536.0 to 537.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
88489	540.8 to 542.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88490	542.5 to 548.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112171010	VIA CERIONI	SUNSET AVE	VIA DE ORO	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88491	551.3 to 552.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88492	556.1 to 557.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
88503	558.7 to 588.2 feet	Key Note Segment		5 ft	148			
88455	588.5 to 589.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
88493	588.7 to 592.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: E *side of* **VIA CERIONI** *Starting at:* **SUNSET AVE** **$153,405.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171003	VIA CERIONI	VIA CAPITOLA	VIA SANTA BARBARA	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88419	1.0 to 9.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
88416	10.3 to 11.3 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
88420	25.5 to 27.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
88421	33.8 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
88422	48.8 to 50.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88423	50.9 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
88424	67.2 to 68.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
88425	71.5 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
88426	73.0 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
88427	79.3 to 110.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	157	SF	$120	**$18,780**
88417	91.3 to 92.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
88428	112.8 to 139.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	133	SF	$120	**$15,900**
88418	113.4 to 114.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
88429	143.2 to 147.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
88430	147.1 to 166.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**

TOTAL COST FOR: W *side of* **VIA CERIONI** *Starting at:* **VIA CAPITOLA** **$67,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171001	VIA CERIONI	VIA DE ORO	VIA CAPITOLA	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88404	1.0 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,220**
88405	27.0 to 33.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
88406	36.3 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
88407	39.4 to 59.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
88408	62.3 to 85.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,860**
88403	75.8 to 76.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
88409	85.4 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
88410	106.4 to 109.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
88411	111.8 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
88412	119.0 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
88413	123.3 to 135.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,260**
88414	135.7 to 154.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
88415	152.8 to 154.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **VIA CERIONI** *Starting at:* **VIA DE ORO** **$81,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112171005	VIA CERIONI	VIA SANTA BARBARA	SUNSET AVE	30

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88433	0.0 to 4.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
88434	4.0 to 5.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
88435	7.8 to 11.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
88436	16.7 to 33.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
88437	37.7 to 38.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
88438	41.7 to 44.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
88439	46.0 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
88431	51.1 to 52.1 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
88432	53.6 to 54.6 feet	**Vertical Change**	.73"	5 ft	5	SF	$75	**$375**
88441	54.1 to 55.8 feet		6.0-7.0%	5 ft	9			
88440	56.1 to 64.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**

TOTAL COST FOR: W *side of* **VIA CERIONI** *Starting at:* **VIA SANTA BARBARA** **$25,890.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170959	VIA DE ORO	CAITLAN DRIVE	VIA CERIONI	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88373	1.0 to 4.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
88374	6.3 to 15.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,340**
88363	10.4 to 11.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
88375	15.9 to 17.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
88397	17.8 to 47.4 feet	Key Note Segment		5 ft	148			
88376	47.8 to 50.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
88377	53.2 to 61.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
88398	61.4 to 80.3 feet	Key Note Segment		5 ft	95			
88364	77.3 to 78.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
88378	82.4 to 87.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
88379	87.2 to 101.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
88380	101.0 to 105.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
88365	107.7 to 108.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
88381	108.5 to 110.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
88366	111.1 to 112.1 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
88382	113.1 to 128.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
88383	128.9 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
88384	132.8 to 137.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
88399	138.2 to 158.1 feet	Key Note Segment		5 ft	100			
88367	139.0 to 141.7 feet	**Vertical Change**	.3"	5 ft	13	REF		
88368	148.6 to 149.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
88385	161.3 to 176.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,060**
88400	176.4 to 195.8 feet	Key Note Segment		5 ft	97			
88369	177.2 to 178.2 feet	**Vertical Change**	.45"	5 ft	5	REF		
88386	200.2 to 205.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
88387	207.5 to 212.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	27	SF	$120	**$3,240**
88388	213.2 to 216.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
88389	218.8 to 233.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	73	SF	$120	**$8,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170959	VIA DE ORO	CAITLAN DRIVE	VIA CERIONI	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88401	233.8 to 253.3 feet	Key Note Segment		5 ft	98			
88372	244.0 to 245.0 feet	Vertical Change	-.4"	5 ft	5	REF		
88390	255.5 to 256.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
88391	256.9 to 259.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
88392	260.2 to 282.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	111	SF	$120	**$13,260**
88393	282.3 to 287.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
88402	287.3 to 317.0 feet	Key Note Segment		5 ft	149			
88394	317.8 to 319.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
88395	321.9 to 326.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
88396	329.3 to 332.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

TOTAL COST FOR: S *side of* **VIA DE ORO** *Starting at:* **CAITLAN DRIVE** **$93,375.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171013	VIA DE ORO	VIA CERIONI	CAITLAN DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88512	1.3 to 4.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
88513	6.9 to 10.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
88534	10.8 to 31.7 feet	Key Note Segment		5 ft	105			
88514	32.3 to 34.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$400**
88515	45.3 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
88516	51.8 to 56.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
88517	57.2 to 64.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
88518	67.7 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
88535	80.0 to 99.2 feet	Key Note Segment		5 ft	96			
88504	90.2 to 91.2 feet	**Vertical Change**	.48"	5 ft	5	REF		
88519	100.3 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
88520	108.8 to 110.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
88536	111.8 to 131.3 feet	Key Note Segment		5 ft	98			
88521	132.5 to 135.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
88522	138.4 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
88523	158.9 to 162.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
88524	163.1 to 167.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
88525	168.9 to 187.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,100**
88505	182.3 to 183.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
88537	187.4 to 208.5 feet	Key Note Segment		5 ft	106			
88506	198.8 to 199.8 feet	**Vertical Change**	-.32"	5 ft	5	REF		
88526	211.3 to 223.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
88507	220.3 to 221.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
88538	224.9 to 245.3 feet	Key Note Segment		5 ft	102			
88527	247.7 to 271.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	118	SF	$120	**$14,160**
88528	271.5 to 278.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
88529	279.8 to 281.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
88539	281.3 to 302.3 feet	Key Note Segment		5 ft	105			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112171013	VIA DE ORO	VIA CERIONI	CAITLAN DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88508	292.4 to 293.4 feet	Vertical Change	-.26"	5 ft	5	REF		
88530	303.1 to 307.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
88531	308.0 to 322.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
88509	310.1 to 311.1 feet	Vertical Change	.36"	5 ft	5	REF		
88510	325.7 to 326.7 feet	Vertical Change	-.32"	5 ft	5	LF	$75	**$375**
88532	327.5 to 332.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
88540	332.5 to 354.5 feet	Key Note Segment		5 ft	110			
88533	355.3 to 388.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	165	SF	$120	**$19,800**
88511	377.8 to 378.8 feet	Vertical Change	.34"	5 ft	5	REF		
88541	386.8 to 388.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: N *side of* **VIA DE ORO** *Starting at:* **VIA CERIONI** **$116,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170942	VIA SANTA BARBARA	CAITLAN DRIVE	VIA CERIONI	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88207	2.3 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
88208	5.0 to 16.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
88209	16.3 to 17.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
88232	19.8 to 21.3 feet		5.0-6.0%	5 ft	8			
88210	20.2 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
88226	24.3 to 44.0 feet	Key Note Segment		5 ft	99			
88199	34.4 to 35.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
88211	44.2 to 46.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$380**
88212	47.8 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
88200	48.3 to 49.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
88227	52.8 to 72.8 feet	Key Note Segment		5 ft	100			
88213	75.6 to 79.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
88214	79.8 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,900**
88201	85.5 to 86.5 feet	**Vertical Change**	.42"	5 ft	5	REF		
88202	103.5 to 104.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
88215	103.7 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
88228	107.6 to 137.2 feet	Key Note Segment		5 ft	148			
88203	138.2 to 139.2 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
88216	139.4 to 144.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
88217	144.5 to 158.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
88229	159.8 to 181.8 feet	Key Note Segment		5 ft	110			
88218	184.8 to 197.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
88219	199.9 to 201.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
88220	202.2 to 203.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88221	205.7 to 206.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88222	212.6 to 213.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
88230	213.9 to 234.0 feet	Key Note Segment		5 ft	101			
88204	215.0 to 216.0 feet	**Vertical Change**	.39"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112170942	VIA SANTA BARBARA	CAITLAN DRIVE	VIA CERIONI	29

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88223	235.2 to 239.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
88224	239.9 to 266.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	132	SF	$120	**$15,840**
88231	266.3 to 286.5 feet	Key Note Segment		5 ft	101			
88206	276.8 to 277.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
88225	290.1 to 312.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	113	SF	$120	**$13,620**

TOTAL COST FOR: S *side of* **VIA SANTA BARBARA** *Starting at:* **CAITLAN DRIVE** **$85,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170945	VIA SANTA BARBARA	VIA CERIONI	CAITLAN DRIVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88241	0.9 to 3.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
88242	3.3 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88243	9.5 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
88260	10.7 to 30.7 feet	Key Note Segment		5 ft	100			
88233	11.5 to 12.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
88234	21.3 to 22.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
88244	34.2 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
88235	38.9 to 39.9 feet	**Vertical Change**	2.62"	5 ft	5	REF		
88245	46.9 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
88246	57.3 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
88261	61.6 to 81.8 feet	Key Note Segment		5 ft	101			
88247	82.9 to 89.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
88248	89.7 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
88262	100.7 to 121.3 feet	Key Note Segment		5 ft	103			
88236	100.9 to 101.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
88249	124.2 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
88238	133.9 to 134.9 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
88250	135.2 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
88251	147.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
88252	159.8 to 161.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
88253	172.9 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
88263	176.7 to 198.5 feet	Key Note Segment		5 ft	109			
88254	199.3 to 213.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
88264	214.9 to 236.6 feet	Key Note Segment		5 ft	109			
88239	226.3 to 227.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
88255	238.3 to 253.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$9,000**
88256	256.2 to 267.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
88265	268.3 to 289.8 feet	Key Note Segment		5 ft	108			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112170945	VIA SANTA BARBARA	VIA CERIONI	CAITLAN DRIVE	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88257	291.1 to 294.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
88258	294.6 to 303.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
88259	303.8 to 317.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
88240	318.1 to 319.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **VIA SANTA BARBARA** *Starting at:* **VIA CERIONI** **$78,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151053	VICTORY LANE	INDEPENDENCE DRIVE	PECAN AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81724	26.3 to 41.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
81722	27.8 to 28.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
81725	58.4 to 64.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
81726	75.7 to 88.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
81727	98.1 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
81728	110.5 to 119.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
81729	124.6 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
81730	134.2 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81731	140.9 to 144.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
81732	161.8 to 163.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
81733	202.8 to 203.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
81734	221.3 to 222.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81735	229.3 to 234.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
81736	245.5 to 248.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
81737	262.2 to 272.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
81738	282.1 to 286.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
81739	297.1 to 311.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
81740	323.3 to 325.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
81741	331.7 to 335.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
81742	354.1 to 358.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81743	363.3 to 364.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81744	395.9 to 397.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
81745	399.7 to 401.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
81746	401.8 to 403.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
81747	423.3 to 427.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
81748	433.4 to 436.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
81749	441.4 to 443.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
81750	452.6 to 456.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151053	VICTORY LANE	INDEPENDENCE DRIVE	PECAN AVE	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81751	463.8 to 468.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
81723	472.7 to 473.7 feet	**Vertical Change**	.51"	5 ft	5	REF		
81752	473.5 to 474.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81753	483.8 to 491.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
81754	520.4 to 528.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
81755	531.8 to 533.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
81756	534.8 to 560.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
81757	562.4 to 566.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
81758	570.0 to 571.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$780**
81759	571.8 to 579.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: W *side of* **VICTORY LANE** *Starting at:* **INDEPENDENCE DRIVE** **$112,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151127	VICTORY LANE	PECAN AVE	INDEPENDENCE DRIVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81944	1.3 to 10.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
81934	7.4 to 8.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
81935	15.9 to 16.9 feet	**Vertical Change**	3.47"	5 ft	5	SF	$75	**$375**
81945	17.4 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81946	21.9 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
81936	22.6 to 23.6 feet	**Vertical Change**	.38"	5 ft	5	REF		
81947	37.7 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
81948	47.2 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81949	60.5 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
81950	94.3 to 97.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
81951	103.1 to 111.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
81952	122.2 to 132.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
81953	140.0 to 142.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
81954	150.8 to 159.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
81937	158.7 to 159.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
81938	174.6 to 175.6 feet	**Vertical Change**	3.54"	5 ft	5	SF	$75	**$375**
81978	178.3 to 217.8 feet	Key Note Segment		5 ft	198			
81939	203.0 to 204.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
81940	224.0 to 225.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
81955	226.2 to 229.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
81956	279.3 to 285.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
81957	288.1 to 291.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,740**
81958	291.0 to 306.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,540**
81959	317.2 to 327.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
81960	333.1 to 342.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
81961	367.8 to 369.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81962	385.0 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
81941	390.0 to 391.0 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151127	VICTORY LANE	PECAN AVE	INDEPENDENCE DRIVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
81963	397.4 to 400.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
81964	400.0 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
81965	424.9 to 433.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
81942	451.8 to 452.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
81966	455.9 to 457.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
81967	458.5 to 467.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
81968	470.2 to 484.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
81969	487.4 to 489.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
81970	495.8 to 501.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
81971	504.4 to 508.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
81972	512.9 to 524.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
81973	528.9 to 530.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
81974	531.7 to 534.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
81975	539.3 to 541.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
81976	543.3 to 544.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
81977	551.9 to 566.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**

TOTAL COST FOR: E *side of* **VICTORY LANE** *Starting at:* **PECAN AVE** **$117,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121431	VINEYARD AVE	232 VINEYARD AVE	236 VINEYARD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61083	0.5 to 18.1 feet	Key Note Segment		5 ft	88			
61084	52.7 to 70.9 feet	Key Note Segment		5 ft	91			
61080	74.1 to 76.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61081	81.8 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
61085	92.2 to 110.0 feet	Key Note Segment		5 ft	89			
61082	110.0 to 119.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	49	SF	$40	**$1,960**

TOTAL COST FOR: SW *side of* **VINEYARD AVE** *Starting at:* **232 VINEYARD AVE** **$5,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108121433	VINEYARD AVE	310 VINEYARD AVE	CLINTON ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61090	0.0 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
61097	4.5 to 15.3 feet	Key Note Segment		5 ft	54			
61091	36.8 to 42.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
61092	44.1 to 47.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
61093	52.2 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
61098	75.7 to 94.8 feet	Key Note Segment		5 ft	96			
61086	83.0 to 84.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
61087	85.9 to 86.9 feet	**Vertical Change**	-.74"	5 ft	5	REF		
61088	89.3 to 92.1 feet	**Vertical Change**	.32"	5 ft	14	REF		
61094	100.2 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
61095	119.8 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
61096	134.2 to 140.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
61089	138.6 to 139.6 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **VINEYARD AVE** *Starting at:* **310 VINEYARD AVE** **$24,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101341	VINEYARD AVE	406 VINEYARD AVE	400 VINEYARD AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56408	0.0 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	141	SF	$120	**$16,920**

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **406 VINEYARD AVE** **$16,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108101338	VINEYARD AVE	409 VINEYARD AVE	409 409 VINEYARD AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56401	0.7 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
56406	6.7 to 25.9 feet	Key Note Segment		5 ft	96			
56402	28.3 to 33.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
56403	37.1 to 40.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
56404	41.3 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
56405	45.8 to 49.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **409 VINEYARD AVE** **$12,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091035	VINEYARD AVE	635 6TH ST	6TH ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47245	0.0 to 8.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	40	SF	$120	**$4,800**
47244	5.2 to 6.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
47246	8.8 to 15.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	34	SF	$120	**$4,080**
47247	15.6 to 18.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
47248	19.4 to 22.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
47252	23.3 to 42.7 feet	Key Note Segment		5 ft	97			
47249	45.9 to 51.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
47250	54.1 to 75.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	107	SF	$120	**$12,840**
47251	75.5 to 76.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
47253	76.9 to 108.6 feet	Key Note Segment		5 ft	158			

TOTAL COST FOR: SW *side of* **VINEYARD AVE** *Starting at:* **635 6TH ST** **$29,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108110944	VINEYARD AVE	635 VINEYARD AVE	619 VINEYARD AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57744	0.9 to 14.4 feet	Key Note Segment		4 ft	54			
57725	14.4 to 20.4 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	24	SF	$40	$960
57717	20.0 to 21.0 feet	Vertical Change	.38"	4 ft	4	REF		
57726	22.2 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	$5,712
57718	32.4 to 33.4 feet	Vertical Change	.6"	4 ft	4	REF		
57727	36.4 to 40.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	15	SF	$120	$1,824
57745	40.3 to 53.9 feet	Key Note Segment		4 ft	54			
57719	40.6 to 41.6 feet	Vertical Change	-.35"	4 ft	4	REF		
57720	47.8 to 48.8 feet	Vertical Change	.57"	4 ft	4	REF		
57721	53.5 to 54.5 feet	Vertical Change	-.29"	4 ft	4	REF		
57728	56.3 to 64.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	$4,128
57729	71.0 to 96.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	101	SF	$120	$12,144
57730	98.6 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,640
57731	108.8 to 111.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	$1,152
57746	111.2 to 125.7 feet	Key Note Segment		4 ft	58			
57732	126.8 to 128.1 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	5	SF	$120	$624
57733	129.4 to 140.1 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	43	SF	$120	$5,136
57722	135.5 to 136.5 feet	Vertical Change	.59"	4 ft	4	REF		
57734	143.3 to 144.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	6	SF	$120	$672
57735	145.1 to 147.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	8	SF	$120	$1,008
57736	150.5 to 151.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$528
57737	152.4 to 157.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,640
57738	157.9 to 161.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	$1,632
57739	163.8 to 174.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	43	SF	$120	$5,136
57747	174.5 to 195.0 feet	Key Note Segment		4 ft	82			
57740	195.0 to 196.3 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	5	SF	$40	$208
57723	197.4 to 198.4 feet	Vertical Change	-.27"	4 ft	4	LF	$75	$300
57741	198.8 to 200.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	$720

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108110944	VINEYARD AVE	635 VINEYARD AVE	619 VINEYARD AVE	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
57742	201.0 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
57724	216.5 to 217.5 feet	**Vertical Change**	.43"	4 ft	4	LF	$75	**$300**
57748	222.2 to 243.2 feet	Key Note Segment		4 ft	84			
57743	244.1 to 245.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **635 VINEYARD AVE** **$52,168.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091031	VINEYARD AVE	6TH ST	E YOSEMITE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47213	0.0 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
47214	9.9 to 11.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
47215	13.9 to 17.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
47216	17.3 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
47212	21.3 to 22.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
47217	21.7 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
47218	41.3 to 79.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	190	SF	$120	**$22,800**
47219	79.9 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
47220	85.9 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
47221	98.6 to 120.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
47222	124.2 to 136.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
47223	141.6 to 156.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**
47224	157.6 to 162.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
47239	162.6 to 188.7 feet	Key Note Segment		5 ft	131			
47225	189.3 to 191.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	11	SF	$40	**$440**
47226	192.3 to 213.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	104	SF	$120	**$12,480**
47227	218.5 to 223.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
47228	224.2 to 226.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
47229	229.8 to 233.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
47230	233.2 to 241.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,160**
47231	242.5 to 246.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
47232	251.2 to 255.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
47233	255.8 to 262.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
47240	262.8 to 288.5 feet	Key Note Segment		5 ft	129			
47234	288.7 to 291.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
47235	293.4 to 294.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
47236	294.9 to 297.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,440**
47237	297.3 to 301.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2106091031	VINEYARD AVE	6TH ST	E YOSEMITE AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47238	301.3 to 307.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **6TH ST** **$127,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108121420	VINEYARD AVE	CLINTON ST	305 VINEYARD AVE	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61034	0.3 to 17.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
61030	10.6 to 11.6 feet	**Vertical Change**	2.23"	5 ft	5	REF		
61035	17.5 to 24.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
61031	21.2 to 22.2 feet	**Vertical Change**	.77"	5 ft	5	REF		
61046	26.3 to 42.9 feet	Key Note Segment		5 ft	83			
61036	42.9 to 45.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	15	SF	$40	**$580**
61037	49.8 to 54.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
61032	50.2 to 51.2 feet	**Vertical Change**	-.31"	5 ft	5	REF		
61038	56.2 to 62.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
61039	63.0 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
61047	67.8 to 93.8 feet	Key Note Segment		5 ft	130			
61040	93.8 to 95.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
61041	103.3 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
61042	106.4 to 118.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
61043	120.1 to 130.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	54	SF	$120	**$6,420**
61044	130.8 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
61045	164.8 to 166.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61048	176.1 to 177.4 feet		5.0-6.0%	5 ft	7			
61049	177.4 to 178.6 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **CLINTON ST** **$48,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2108101336	VINEYARD AVE	CLINTON ST	406 VINEYARD AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
56385	0.9 to 15.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
56377	2.3 to 3.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
56378	8.6 to 9.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
56386	17.9 to 22.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
56387	24.2 to 33.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
56388	36.3 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
56397	51.0 to 70.4 feet	Key Note Segment		5 ft	97			
56379	52.2 to 53.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
56380	60.4 to 61.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
56381	67.8 to 68.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
56389	71.7 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	46	SF	$120	**$5,520**
56390	80.9 to 88.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
56391	89.2 to 92.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
56382	93.7 to 94.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
56392	94.5 to 95.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
56393	97.5 to 98.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
56394	98.9 to 100.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
56398	100.9 to 114.2 feet	Key Note Segment		5 ft	67			
56395	115.4 to 122.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
56396	125.0 to 144.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**
56400	141.1 to 143.0 feet		5.0-6.0%	5 ft	10			
56399	144.3 to 157.8 feet	Key Note Segment		5 ft	68			
56383	144.4 to 145.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
56384	154.5 to 155.5 feet	**Vertical Change**	-.39"	5 ft	5	REF		

TOTAL COST FOR: SW *side of* **VINEYARD AVE** *Starting at:* **CLINTON ST** **$54,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2106091033	VINEYARD AVE	E YOSEMITE AVE	632 E YOSEMITE AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
47241	0.0 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
47243	16.8 to 36.6 feet	Key Note Segment		5 ft	99			
47242	42.8 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,800**

TOTAL COST FOR: SW *side of* **VINEYARD AVE** *Starting at:* **E YOSEMITE AVE** **$20,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108121435	VINEYARD AVE	VINEYARD AVE	CLINTON ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61101	8.7 to 9.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
61099	15.2 to 16.2 feet	**Vertical Change**	-.31"	6 ft	6	LF	$75	**$450**
61102	16.3 to 24.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	48	SF	$120	**$5,760**
61103	24.8 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,368**
61100	32.3 to 33.3 feet	**Vertical Change**	-.32"	6 ft	6	LF	$75	**$450**
61104	35.3 to 36.8 feet		5.0-6.0%	6 ft	9			

TOTAL COST FOR: W *side of* **VINEYARD AVE** *Starting at:* **VINEYARD AVE** **$8,748.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2108121429	VINEYARD AVE	WASHINGTON ST	233 VINEYARD AVE	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61072	0.0 to 10.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
61065	2.7 to 3.7 feet	**Vertical Change**	.36"	5 ft	5	REF		
61066	4.6 to 5.6 feet	**Vertical Change**	.68"	5 ft	5	REF		
61067	9.7 to 10.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
61073	14.5 to 16.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
61074	26.3 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
61068	29.0 to 30.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
61075	36.3 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
61069	43.0 to 44.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
61078	43.4 to 56.3 feet	Key Note Segment		5 ft	65			
61076	59.0 to 61.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
61070	62.1 to 63.1 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
61077	65.6 to 70.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
61071	68.1 to 69.1 feet	**Vertical Change**	.43"	5 ft	5	REF		
61079	69.3 to 71.3 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: NE *side of* **VINEYARD AVE** *Starting at:* **WASHINGTON ST** **$20,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201038	W 1ST ST	117 W 1ST ST	N G ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40415	0.2 to 8.3 feet	Key Note Segment		5 ft	41			
40410	8.6 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
40411	24.9 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
40412	39.8 to 48.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
40413	53.8 to 57.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40414	60.3 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

TOTAL COST FOR: NW *side of* **W 1ST ST** *Starting at:* **117 W 1ST ST** **$23,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201031	W 1ST ST	N G ST	525 N G ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40394	1.2 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
40388	11.9 to 12.9 feet	**Vertical Change**	3.31"	5 ft	5	SF	$75	**$375**
40389	19.7 to 20.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
40395	20.1 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
40390	27.6 to 28.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
40391	29.3 to 30.3 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
40392	32.8 to 33.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
40393	37.9 to 38.9 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
40396	42.0 to 44.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
40397	45.0 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: SE *side of* **W 1ST ST** *Starting at:* **N G ST** **$9,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201035	W 1ST ST	N GATEWAY DR	608 N GATEWAY DR	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40402	0.0 to 11.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,960**
40398	2.4 to 3.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
40403	11.6 to 15.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
40407	15.8 to 44.0 feet	Key Note Segment		5 ft	141			
40399	19.3 to 20.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
40404	44.7 to 68.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	**$14,160**
40400	50.5 to 51.5 feet	**Vertical Change**	-.31"	5 ft	5	REF		
40408	68.3 to 98.3 feet	Key Note Segment		5 ft	150			
40405	104.3 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,760**
40401	115.4 to 116.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
40406	124.3 to 126.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
40409	127.7 to 143.8 feet	Key Note Segment		5 ft	81			

TOTAL COST FOR: NW *side of* **W 1ST ST** *Starting at:* **N GATEWAY DR** **$36,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201138	W 1ST ST	N H ST	214 W 1ST ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40729	0.9 to 11.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
40730	12.5 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
40731	20.5 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
40736	40.0 to 52.3 feet	Key Note Segment		5 ft	62			
40732	53.6 to 60.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
40733	60.9 to 65.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
40727	64.1 to 65.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
40737	65.7 to 89.3 feet	Key Note Segment		5 ft	118			
40728	90.4 to 93.7 feet	**Vertical Change**	.38"	5 ft	17	REF		
40734	90.5 to 111.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
40735	111.5 to 119.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**

TOTAL COST FOR: SE *side of* **W 1ST ST** *Starting at:* **N H ST** **$44,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201024	W 2ND ST	109 W 2ND ST	109 W 2ND ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40359	0.0 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	129	SF	$120	**$15,480**
40360	27.3 to 29.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
40361	32.0 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
40357	33.8 to 34.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
40362	56.1 to 57.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40363	58.0 to 83.2 feet	Key Note Segment		5 ft	126			
40358	62.9 to 63.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **W 2ND ST** *Starting at:* **109 W 2ND ST** **$30,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241148	W 4TH ST	1412 W 4TH ST	1404 W 4TH ST	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107080	3.2 to 4.2 feet	Vertical Change	.44"	4 ft	4	LF	$75	$300
107081	10.4 to 11.4 feet	Vertical Change	2.26"	4 ft	4	SF	$75	$300
107088	28.3 to 38.5 feet	Key Note Segment		4 ft	41			
107087	53.5 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	$4,320
107089	72.6 to 82.6 feet	Key Note Segment		4 ft	40			
107082	86.8 to 87.8 feet	Vertical Change	2.27"	4 ft	4	SF	$75	$300
107083	88.8 to 89.8 feet	Vertical Change	.31"	4 ft	4	LF	$75	$300
107090	119.5 to 127.3 feet	Key Note Segment		4 ft	31			
107084	119.7 to 120.7 feet	Vertical Change	.3"	4 ft	4	REF		
107086	133.2 to 134.2 feet	Vertical Change	.35"	4 ft	4	LF	$75	$300

TOTAL COST FOR: S *side of* **W 4TH ST** *Starting at:* **1412 W 4TH ST** **$5,820.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201205	W 4TH ST	FREEWAY ENTRANCE	FREEWAY EXIT	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40783	0.5 to 12.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
40784	19.5 to 28.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
40785	37.8 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
40786	55.9 to 57.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
40787	81.3 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
40788	95.6 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40789	100.1 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: SE *side of* **W 4TH ST** *Starting at:* **FREEWAY ENTRANCE** **$25,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201207	W 4TH ST	FREEWAY EXIT	N G ST	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40795	0.0 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
40796	7.6 to 18.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
40797	22.2 to 25.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
40798	41.3 to 53.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
40790	47.2 to 48.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
40799	67.8 to 71.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
40800	74.2 to 77.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
40801	77.3 to 80.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
40802	85.8 to 111.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
40791	91.8 to 92.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
40803	115.5 to 136.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
40804	144.1 to 145.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40805	148.4 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40806	155.8 to 174.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,980**
40807	174.1 to 180.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
40808	183.2 to 198.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,420**
40792	191.3 to 192.3 feet	**Vertical Change**	.52"	5 ft	5	REF		
40809	202.8 to 206.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
40793	204.3 to 205.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
40810	207.8 to 211.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
40811	216.9 to 221.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
40794	220.7 to 221.7 feet	**Vertical Change**	-.5"	5 ft	5	REF		
40812	223.8 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
40813	233.0 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: SE *side of* **W 4TH ST** *Starting at:* **FREEWAY EXIT** **$90,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201124	W 4TH ST	N G ST	N H ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40640	0.0 to 3.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
40637	2.5 to 3.5 feet	**Vertical Change**	-.56"	5 ft	5	REF		
40641	3.0 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
40642	49.3 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
40643	58.2 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
40644	64.7 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
40645	70.8 to 73.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
40646	76.3 to 80.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
40647	94.3 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
40648	101.6 to 116.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
40649	121.8 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
40650	156.3 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
40651	160.7 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
40652	173.5 to 174.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
40653	183.7 to 184.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
40654	205.2 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
40655	214.2 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
40639	223.6 to 224.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		

TOTAL COST FOR: NW *side of* **W 4TH ST** *Starting at:* **N G ST** **$41,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201211	W 4TH ST	N G ST	N GATEWAY DR	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40814	3.8 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40815	46.3 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
40822	96.3 to 119.8 feet	Key Note Segment		5 ft	118			
40816	120.7 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
40823	123.6 to 143.0 feet	Key Note Segment		5 ft	97			
40817	150.3 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
40824	155.8 to 174.8 feet	Key Note Segment		5 ft	95			
40818	189.3 to 194.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
40819	197.7 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
40825	201.9 to 230.4 feet	Key Note Segment		5 ft	143			
40820	243.4 to 247.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
40821	253.8 to 255.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: SE *side of* **W 4TH ST** *Starting at:* **N G ST** **$16,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201159	W 4TH ST	N H ST	N I ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40774	3.3 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
40775	39.3 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
40776	95.8 to 98.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
40777	188.9 to 190.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
40778	208.9 to 210.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
40779	222.7 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
40773	227.6 to 228.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
40780	235.6 to 239.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
40781	240.2 to 244.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: NW *side of* **W 4TH ST** *Starting at:* **N H ST** **$18,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201203	W 4TH ST	N I ST	FREEWAY ENTRANCE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40782	7.1 to 16.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**

TOTAL COST FOR: SE *side of* **W 4TH ST** *Starting at:* **N I ST** **$5,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201241145	W 4TH ST	ROTAN AVE	1416 W 4TH ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107077	4.7 to 15.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
107078	21.4 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
107075	37.4 to 38.4 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
107079	39.1 to 41.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,104**
107076	48.7 to 49.7 feet	**Vertical Change**	.49"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: S *side of* **W 4TH ST** *Starting at:* **ROTAN AVE** **$7,464.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041028	W CENTRAL AVE	115 W CENTRAL AVE	117 W CENTRAL AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121072	2.0 to 16.8 feet	Key Note Segment		5 ft	74			
121064	2.4 to 3.4 feet	**Vertical Change**	-.51"	5 ft	5	REF		
121065	9.8 to 10.8 feet	**Vertical Change**	.55"	5 ft	5	REF		
121068	17.3 to 18.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	5	SF	$40	**$200**
121066	19.0 to 20.0 feet	**Vertical Change**	2.07"	5 ft	5	SF	$75	**$375**
121067	23.6 to 24.6 feet	**Vertical Change**	3.33"	5 ft	5	REF		
121069	23.7 to 26.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
121070	30.2 to 31.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
121071	32.2 to 36.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **115 W CENTRAL AVE** **$5,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041030	W CENTRAL AVE	117 W CENTRAL AVE	125 W CENTRAL AVE	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121075	0.8 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
121078	2.8 to 32.1 feet	Key Note Segment		5 ft	147			
121076	33.0 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
121073	40.7 to 41.7 feet	**Vertical Change**	3.17"	5 ft	5	SF	$75	**$375**
121077	65.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
121074	89.3 to 90.3 feet	**Vertical Change**	.29"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **117 W CENTRAL AVE** **$16,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041056	W CENTRAL AVE	130 W CENTRAL AVE	N D ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121136	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
121144	18.8 to 54.8 feet	Key Note Segment		5 ft	180			
121130	19.4 to 20.4 feet	**Vertical Change**	-.36"	5 ft	5	REF		
121137	59.8 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
121131	71.2 to 72.2 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
121132	73.1 to 74.1 feet	**Vertical Change**	-.59"	5 ft	5	SF	$75	**$375**
121138	76.3 to 87.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
121139	87.5 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
121140	97.4 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121141	104.1 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
121133	112.5 to 113.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
121142	115.7 to 121.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
121145	122.7 to 152.7 feet	Key Note Segment		5 ft	150			
121134	136.3 to 137.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
121135	153.5 to 154.5 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
121143	162.0 to 204.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	211	SF	$120	**$25,260**
121146	201.2 to 204.1 feet		5.0-6.0%	5 ft	15			

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **130 W CENTRAL AVE** **$54,585.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041050	W CENTRAL AVE	610 N E ST	N E ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121116	2.8 to 7.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,016**
121117	10.0 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
121118	19.2 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,936**
121119	31.1 to 34.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
121120	45.1 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **610 N E ST** **$12,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041136	W CENTRAL AVE	801 N GATEWAY DR	N GATEWAY DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121228	0.6 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
121226	8.1 to 9.1 feet	**Vertical Change**	.59"	5 ft	5	SF	$75	**$375**
121239	10.1 to 40.7 feet	Key Note Segment		5 ft	153			
121229	42.2 to 43.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
121230	45.7 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
121231	48.8 to 74.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,360**
121227	77.4 to 78.4 feet	**Vertical Change**	-.31"	5 ft	5	REF		
121232	78.0 to 82.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
121233	83.3 to 93.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
121234	102.7 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
121235	109.7 to 114.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
121236	118.6 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
121237	139.7 to 145.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
121238	150.8 to 153.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **801 N GATEWAY DR** **$46,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141134	W CENTRAL AVE	ARAM AVE	CENTRAL CT	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101832	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101817	1.8 to 2.8 feet	**Vertical Change**	.39"	3 ft	3	LF	$75	**$225**
101833	3.3 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**
101834	5.4 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,440**
101818	10.4 to 11.4 feet	**Vertical Change**	-.29"	3 ft	3	LF	$75	**$225**
101819	15.3 to 16.3 feet	**Vertical Change**	.33"	3 ft	3	LF	$75	**$225**
101835	17.0 to 23.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	20	SF	$120	**$2,448**
101836	26.3 to 29.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	8	SF	$120	**$1,008**
101820	29.4 to 30.4 feet	**Vertical Change**	3.29"	3 ft	3	SF	$75	**$225**
101821	31.4 to 32.4 feet	**Vertical Change**	-.34"	3 ft	3	LF	$75	**$225**
101822	34.5 to 35.5 feet	**Vertical Change**	.32"	3 ft	3	LF	$75	**$225**
101823	44.8 to 45.8 feet	**Vertical Change**	.39"	3 ft	3	REF		
101837	44.8 to 46.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101838	49.8 to 50.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$360**
101824	50.5 to 51.5 feet	**Vertical Change**	.34"	3 ft	3	REF		
101839	50.8 to 52.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	6	SF	$120	**$684**
101825	56.9 to 57.9 feet	**Vertical Change**	.52"	3 ft	3	REF		
101840	57.5 to 70.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	39	SF	$120	**$4,716**
101826	63.0 to 64.0 feet	**Vertical Change**	.72"	3 ft	3	REF		
101827	68.3 to 69.3 feet	**Vertical Change**	.51"	3 ft	3	REF		
101841	77.3 to 78.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101842	86.2 to 87.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$432**
101843	87.9 to 89.3 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	**$504**
101828	94.4 to 95.4 feet	**Vertical Change**	.92"	3 ft	3	REF		
101844	95.4 to 101.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	19	SF	$120	**$2,304**
101845	103.0 to 105.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	7	SF	$120	**$864**
101846	108.3 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	30	SF	$120	**$3,600**
101847	120.1 to 125.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,088**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141134	W CENTRAL AVE	ARAM AVE	CENTRAL CT	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101848	130.6 to 134.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**
101857	135.2 to 136.5 feet		5.0-6.0%	3 ft	4			
101829	137.3 to 138.3 feet	**Vertical Change**	.44"	3 ft	3	LF	$75	**$225**
101849	139.8 to 140.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101850	147.9 to 149.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
101851	149.1 to 150.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101852	153.7 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	28	SF	$120	**$3,348**
101853	163.9 to 175.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	34	SF	$120	**$4,032**
101854	177.6 to 184.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	22	SF	$120	**$2,628**
101855	184.9 to 187.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	9	SF	$120	**$1,080**
101830	188.6 to 189.6 feet	**Vertical Change**	.26"	3 ft	3	LF	$75	**$225**
101856	190.4 to 194.9 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	14	SF	$120	**$1,620**
101858	192.6 to 194.9 feet		5.0-6.0%	3 ft	7			
101859	192.6 to 194.9 feet	Running Slope	5.0-6.0%	3 ft	7	SF	$120	**$828**
101831	193.6 to 194.6 feet	**Vertical Change**	-.26"	3 ft	3	REF		

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **ARAM AVE** **$40,284.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141139	W CENTRAL AVE	CENTRAL CT	RIVERVIEW DR	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101922	0.0 to 4.5 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	14	SF	$120	**$1,620**
101923	5.6 to 6.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	**$432**
101904	8.8 to 9.8 feet	**Vertical Change**	-.31"	3 ft	3	LF	$75	**$225**
101924	10.4 to 16.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	19	SF	$120	**$2,340**
101925	18.4 to 19.4 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101926	20.0 to 24.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	14	SF	$120	**$1,728**
101905	25.4 to 26.4 feet	**Vertical Change**	.33"	3 ft	3	REF		
101927	25.4 to 27.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$684**
101928	29.9 to 32.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,044**
101929	33.1 to 37.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	14	SF	$120	**$1,692**
101907	35.2 to 36.2 feet	**Vertical Change**	-.32"	3 ft	3	REF		
101930	39.3 to 42.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	11	SF	$120	**$1,260**
101908	44.6 to 45.6 feet	**Vertical Change**	-.76"	3 ft	3	REF		
101931	45.1 to 53.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	25	SF	$120	**$2,952**
101909	49.3 to 50.3 feet	**Vertical Change**	-.31"	3 ft	3	REF		
101932	54.6 to 55.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$432**
101933	56.8 to 60.0 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	10	SF	$120	**$1,152**
101910	59.0 to 60.0 feet	**Vertical Change**	.34"	3 ft	3	REF		
101934	60.0 to 61.1 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$396**
101935	62.4 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	23	SF	$120	**$2,700**
101911	64.2 to 65.2 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101936	72.1 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,152**
101937	76.3 to 81.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	14	SF	$120	**$1,728**
101938	83.4 to 89.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	20	SF	$120	**$2,340**
101912	86.5 to 87.5 feet	**Vertical Change**	2.02"	3 ft	3	REF		
101959	88.3 to 89.4 feet		5.0-6.0%	3 ft	3			
101913	90.6 to 91.6 feet	**Vertical Change**	.3"	3 ft	3	LF	$75	**$225**
101957	91.4 to 105.1 feet	Key Note Segment		3 ft	41			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141139	W CENTRAL AVE	CENTRAL CT	RIVERVIEW DR	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101939	107.8 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	9	SF	$120	**$1,116**
101940	111.8 to 116.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	14	SF	$120	**$1,620**
101941	117.1 to 118.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$612**
101914	121.2 to 122.2 feet	**Vertical Change**	.31"	3 ft	3	REF		
101942	122.1 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101943	126.8 to 138.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	35	SF	$120	**$4,140**
101915	130.7 to 131.7 feet	**Vertical Change**	2.57"	3 ft	3	REF		
101916	134.3 to 135.3 feet	**Vertical Change**	.53"	3 ft	3	REF		
101917	136.3 to 137.3 feet	**Vertical Change**	.27"	3 ft	3	REF		
101918	142.8 to 146.3 feet	**Vertical Change**	.29"	3 ft	11	LF	$75	**$788**
101944	147.8 to 149.9 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	6	SF	$120	**$756**
101945	149.9 to 151.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$504**
101919	150.5 to 151.5 feet	**Vertical Change**	-.4"	3 ft	3	REF		
101946	152.5 to 157.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	14	SF	$120	**$1,620**
101947	162.8 to 175.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	37	SF	$120	**$4,500**
101920	171.2 to 172.2 feet	**Vertical Change**	.46"	3 ft	3	REF		
101958	175.8 to 189.6 feet	Key Note Segment		3 ft	41			
101948	196.8 to 198.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$648**
101949	201.8 to 205.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101950	207.8 to 217.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	29	SF	$120	**$3,420**
101951	217.3 to 227.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	29	SF	$120	**$3,492**
101952	231.9 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$864**
101953	250.8 to 254.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	12	SF	$120	**$1,404**
101954	264.0 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101955	269.1 to 270.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
101921	269.5 to 270.5 feet	**Vertical Change**	.28"	3 ft	3	REF		
101956	271.8 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **CENTRAL CT** **$52,969.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141053	W CENTRAL AVE	CENTRAL PL	ORCHARD AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101180	0.0 to 1.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101161	2.2 to 3.2 feet	**Vertical Change**	.46"	3 ft	3	LF	$75	**$225**
101181	5.7 to 8.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,116**
101182	9.5 to 15.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	**$1,980**
101162	11.0 to 12.0 feet	**Vertical Change**	-.65"	3 ft	3	REF		
101163	13.4 to 14.4 feet	**Vertical Change**	-.29"	3 ft	3	REF		
101222	15.0 to 28.3 feet	Key Note Segment		3 ft	40			
101164	15.6 to 16.6 feet	**Vertical Change**	.27"	3 ft	3	REF		
101165	29.0 to 30.0 feet	**Vertical Change**	.7"	3 ft	3	REF		
101183	29.1 to 30.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101166	45.9 to 46.9 feet	**Vertical Change**	.38"	3 ft	3	LF	$75	**$225**
101184	47.8 to 51.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	**$1,440**
101185	55.7 to 57.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$720**
101186	60.4 to 61.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101187	62.0 to 63.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101188	67.6 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	25	SF	$120	**$3,024**
101189	78.0 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$432**
101167	79.1 to 80.1 feet	**Vertical Change**	.26"	3 ft	3	REF		
101190	83.0 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101168	83.6 to 84.6 feet	**Vertical Change**	3.72"	3 ft	3	REF		
101169	85.9 to 91.4 feet	**Vertical Change**	3.44"	3 ft	17	SF	$75	**$1,238**
101170	104.2 to 105.2 feet	**Vertical Change**	-.33"	3 ft	3	LF	$75	**$225**
101191	106.9 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
101171	110.5 to 113.8 feet	**Vertical Change**	3.56"	3 ft	10	SF	$75	**$743**
101192	119.8 to 126.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	21	SF	$120	**$2,520**
101223	126.8 to 146.1 feet	Key Note Segment		3 ft	58			
101172	131.0 to 132.0 feet	**Vertical Change**	3.46"	3 ft	3	REF		
101193	152.3 to 156.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	14	SF	$120	**$1,656**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141053	W CENTRAL AVE	CENTRAL PL	ORCHARD AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101224	158.1 to 172.3 feet	Key Note Segment		3 ft	43			
101194	172.8 to 175.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$936**
101195	180.7 to 182.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101196	183.2 to 186.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	10	SF	$120	**$1,152**
101197	191.0 to 192.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
101173	199.4 to 200.4 feet	**Vertical Change**	.29"	3 ft	3	LF	$75	**$225**
101198	202.3 to 203.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$468**
101199	205.8 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101200	209.3 to 210.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$540**
101174	214.1 to 215.1 feet	**Vertical Change**	.74"	3 ft	3	SF	$75	**$225**
101201	217.1 to 219.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$936**
101202	223.1 to 224.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101203	233.5 to 238.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	15	SF	$120	**$1,836**
101204	241.8 to 242.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101175	243.2 to 244.2 feet	**Vertical Change**	.35"	3 ft	3	REF		
101205	243.8 to 245.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101206	247.7 to 255.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	24	SF	$120	**$2,844**
101176	256.5 to 257.5 feet	**Vertical Change**	-.46"	3 ft	3	LF	$75	**$225**
101207	259.7 to 262.0 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	7	SF	$120	**$828**
101177	261.1 to 262.1 feet	**Vertical Change**	.69"	3 ft	3	REF		
101208	262.7 to 264.3 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
101178	264.6 to 265.6 feet	**Vertical Change**	-.35"	3 ft	3	REF		
101209	265.4 to 266.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
101210	267.8 to 269.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$468**
101225	270.3 to 284.8 feet	Key Note Segment		3 ft	44			
101211	295.3 to 296.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101212	298.7 to 311.2 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	38	SF	$120	**$4,500**
101179	310.3 to 311.3 feet	**Vertical Change**	-.55"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141053	W CENTRAL AVE	CENTRAL PL	ORCHARD AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101213	315.5 to 317.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$576**
101214	320.7 to 322.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$576**
101215	326.2 to 327.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$612**
101216	329.2 to 330.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101217	333.4 to 337.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	11	SF	$120	**$1,296**
101218	344.9 to 346.4 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$540**
101219	349.2 to 351.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	8	SF	$120	**$972**
101220	357.8 to 358.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101221	361.4 to 371.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	30	SF	$120	**$3,636**
101226	370.0 to 371.3 feet		5.0-6.0%	3 ft	4			
101227	371.3 to 372.3 feet		6.0-7.0%	3 ft	3			

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **CENTRAL PL** **$46,710.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101542	2.3 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	6	SF	$120	**$720**
101501	2.6 to 6.3 feet	Vertical Change	-.3"	3 ft	11	REF		
101543	6.8 to 11.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	14	SF	$120	**$1,728**
101502	9.7 to 10.7 feet	Vertical Change	-.26"	3 ft	3	REF		
101503	15.7 to 19.5 feet	Vertical Change	.27"	3 ft	11	LF	$75	**$855**
101544	20.8 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101504	21.0 to 22.0 feet	Vertical Change	-.26"	3 ft	3	REF		
101545	26.3 to 27.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	**$504**
101626	28.2 to 54.3 feet	Key Note Segment		3 ft	78			
101505	29.1 to 30.1 feet	Vertical Change	-.42"	3 ft	3	REF		
101546	54.3 to 55.7 feet	Cross Slope (Driveway)	3.0-4.0%	3 ft	4	SF	$40	**$168**
101506	56.5 to 57.5 feet	Vertical Change	1.69"	3 ft	3	REF		
101547	56.6 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$468**
101548	60.8 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$720**
101507	66.3 to 69.1 feet	Vertical Change	.28"	3 ft	8	LF	$75	**$630**
101627	67.3 to 81.4 feet	Key Note Segment		3 ft	42			
101549	85.8 to 87.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$756**
101550	90.1 to 94.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	12	SF	$120	**$1,440**
101508	92.8 to 93.8 feet	Vertical Change	.41"	3 ft	3	REF		
101551	97.8 to 101.1 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101552	102.0 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$648**
101509	105.6 to 106.6 feet	Vertical Change	.63"	3 ft	3	REF		
101553	105.8 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$540**
101554	113.4 to 114.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
101555	119.8 to 121.6 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$648**
101556	123.2 to 126.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,188**
101557	129.9 to 133.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	10	SF	$120	**$1,224**
101558	135.9 to 137.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$504**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101559	140.9 to 145.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	15	SF	$120	**$1,800**
101510	144.1 to 145.1 feet	**Vertical Change**	2.67"	3 ft	3	REF		
101560	150.3 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$504**
101628	156.3 to 169.4 feet	Key Note Segment		3 ft	39			
101511	170.0 to 171.0 feet	**Vertical Change**	-.7"	3 ft	3	REF		
101561	170.8 to 176.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	16	SF	$120	**$1,944**
101562	178.8 to 180.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$432**
101629	180.9 to 194.8 feet	Key Note Segment		3 ft	42			
101563	202.7 to 204.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$612**
101564	208.4 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$396**
101565	214.8 to 216.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$756**
101566	222.7 to 228.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	**$2,016**
101567	231.2 to 233.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101512	236.3 to 237.3 feet	**Vertical Change**	.38"	3 ft	3	LF	$75	**$225**
101568	241.8 to 246.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	13	SF	$120	**$1,548**
101569	248.5 to 250.4 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$684**
101630	268.0 to 281.5 feet	Key Note Segment		3 ft	41			
101570	294.6 to 295.6 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101631	295.7 to 308.6 feet	Key Note Segment		3 ft	39			
101571	308.6 to 309.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	4	SF	$40	**$156**
101513	309.8 to 310.8 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101572	315.0 to 328.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	42	SF	$120	**$5,004**
101573	328.9 to 332.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	11	SF	$120	**$1,368**
101514	335.0 to 336.0 feet	**Vertical Change**	.29"	3 ft	3	REF		
101574	335.5 to 337.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	6	SF	$120	**$756**
101575	341.1 to 349.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	24	SF	$120	**$2,880**
101515	345.7 to 346.7 feet	**Vertical Change**	.46"	3 ft	3	REF		
101576	351.8 to 361.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	28	SF	$120	**$3,348**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101516	356.0 to 357.0 feet	Vertical Change	.34"	3 ft	3	REF		
101577	364.8 to 365.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	$396
101578	367.3 to 368.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	$540
101579	372.7 to 380.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	23	SF	$120	$2,736
101632	380.5 to 393.3 feet	Key Note Segment		3 ft	38			
101517	394.5 to 395.5 feet	Vertical Change	-.32"	3 ft	3	LF	$75	$225
101633	406.1 to 419.3 feet	Key Note Segment		3 ft	40			
101580	420.8 to 426.7 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	$2,124
101518	431.1 to 432.1 feet	Vertical Change	.4"	3 ft	3	LF	$75	$225
101519	436.3 to 437.3 feet	Vertical Change	-.28"	3 ft	3	LF	$75	$225
101581	442.1 to 443.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	$612
101582	448.5 to 451.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	$900
101583	451.0 to 453.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	$1,044
101520	451.8 to 452.8 feet	Vertical Change	.27"	3 ft	3	REF		
101584	456.4 to 458.0 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	$576
101521	456.8 to 457.8 feet	Vertical Change	.27"	3 ft	3	REF		
101585	470.2 to 480.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	30	SF	$120	$3,636
101586	487.3 to 489.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	$720
101634	491.8 to 504.8 feet	Key Note Segment		3 ft	39			
101587	505.2 to 507.6 feet	Cross Slope (Driveway)	3.0-4.0%	3 ft	7	SF	$40	$288
101522	506.0 to 507.0 feet	Vertical Change	.31"	3 ft	3	REF		
101588	508.3 to 509.5 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	4	SF	$120	$432
101589	511.8 to 516.7 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	15	SF	$120	$1,764
101635	516.8 to 530.3 feet	Key Note Segment		3 ft	41			
101523	517.8 to 518.8 feet	Vertical Change	-.28"	3 ft	3	REF		
101590	532.4 to 533.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	$360
101591	533.4 to 540.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	20	SF	$120	$2,412
101524	542.0 to 543.0 feet	Vertical Change	.37"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101592	542.7 to 543.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$360**
101525	547.2 to 548.2 feet	**Vertical Change**	.34"	3 ft	3	LF	$75	**$225**
101593	551.8 to 553.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$432**
101594	556.9 to 562.8 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	18	SF	$120	**$2,124**
101526	557.5 to 558.5 feet	**Vertical Change**	.4"	3 ft	3	REF		
101595	564.0 to 565.8 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$648**
101596	569.0 to 570.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$396**
101597	572.7 to 575.9 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	10	SF	$120	**$1,152**
101527	576.9 to 577.9 feet	**Vertical Change**	.47"	3 ft	3	REF		
101598	577.8 to 584.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	20	SF	$120	**$2,340**
101599	585.9 to 586.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101528	588.5 to 589.5 feet	**Vertical Change**	.27"	3 ft	3	REF		
101600	589.3 to 590.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
101601	598.6 to 601.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	8	SF	$120	**$972**
101529	598.9 to 599.9 feet	**Vertical Change**	.27"	3 ft	3	REF		
101636	602.3 to 616.1 feet	Key Note Segment		3 ft	41			
101530	603.1 to 604.1 feet	**Vertical Change**	3.22"	3 ft	3	REF		
101602	616.1 to 620.9 feet	**Cross Slope (Driveway)**	5.0-6.0%	3 ft	14	SF	$40	**$576**
101603	621.3 to 623.2 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$684**
101604	626.2 to 627.9 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$612**
101637	628.7 to 641.3 feet	Key Note Segment		3 ft	38			
101531	629.6 to 630.6 feet	**Vertical Change**	.48"	3 ft	3	REF		
101605	641.6 to 643.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	5	SF	$120	**$540**
101532	642.3 to 643.3 feet	**Vertical Change**	.5"	3 ft	3	REF		
101606	647.3 to 653.6 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	19	SF	$120	**$2,268**
101607	655.3 to 662.5 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	22	SF	$120	**$2,592**
101608	663.8 to 666.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	8	SF	$120	**$1,008**
101609	668.9 to 677.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	26	SF	$120	**$3,096**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101610	681.1 to 695.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	42	SF	$120	**$5,040**
101533	694.1 to 695.1 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101611	696.0 to 698.4 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	7	SF	$120	**$864**
101612	698.8 to 700.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
101534	699.3 to 700.3 feet	**Vertical Change**	.29"	3 ft	3	REF		
101613	702.3 to 708.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,088**
101535	704.5 to 705.5 feet	**Vertical Change**	.33"	3 ft	3	REF		
101614	710.2 to 711.9 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$612**
101638	714.0 to 726.8 feet	Key Note Segment		3 ft	38			
101615	727.3 to 728.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	3 ft	3	SF	$40	**$132**
101616	733.3 to 736.4 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	9	SF	$120	**$1,116**
101639	738.8 to 753.0 feet	Key Note Segment		3 ft	43			
101536	740.0 to 741.0 feet	**Vertical Change**	.58"	3 ft	3	REF		
101617	753.0 to 754.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	3 ft	4	SF	$40	**$168**
101618	755.0 to 756.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$360**
101619	757.0 to 762.6 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	17	SF	$120	**$2,016**
101537	759.9 to 760.9 feet	**Vertical Change**	.28"	3 ft	3	REF		
101620	763.8 to 765.9 feet	Cross Slope (PAR)	9.0-10.0%	3 ft	6	SF	$120	**$756**
101621	766.1 to 769.3 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	10	SF	$120	**$1,152**
101622	769.9 to 771.5 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	5	SF	$120	**$576**
101538	770.9 to 771.9 feet	**Vertical Change**	.37"	3 ft	3	REF		
101623	774.4 to 778.2 feet	Cross Slope (PAR)	10.0-11.0%	3 ft	11	SF	$120	**$1,368**
101539	776.6 to 777.6 feet	**Vertical Change**	.31"	3 ft	3	REF		
101624	779.5 to 781.3 feet	Cross Slope (PAR)	12.0-13.0%	3 ft	5	SF	$120	**$648**
101625	781.8 to 789.3 feet	Cross Slope (PAR)	14.0-15.0%	3 ft	23	SF	$120	**$2,700**
101540	781.9 to 782.9 feet	**Vertical Change**	.47"	3 ft	3	REF		
101640	785.6 to 786.6 feet		7.0-8.0%	3 ft	3			
101541	788.1 to 789.1 feet	**Vertical Change**	.27"	3 ft	3	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141116	W CENTRAL AVE	CENTRAL PL	ARAM AVE	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **W CENTRAL AVE**	*Starting at:* **CENTRAL PL**					**$100,326.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141122	W CENTRAL AVE	JOY ST	ARAM AVE	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101668	6.5 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	19	SF	$120	**$2,304**
101654	12.2 to 13.2 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101669	15.1 to 18.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	11	SF	$120	**$1,332**
101655	17.7 to 18.7 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101670	19.3 to 21.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$720**
101671	30.8 to 31.8 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	3	SF	$120	**$360**
101672	35.2 to 41.0 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	17	SF	$120	**$2,088**
101656	38.6 to 39.6 feet	**Vertical Change**	.36"	3 ft	3	REF		
101657	44.2 to 45.2 feet	**Vertical Change**	.29"	3 ft	3	REF		
101673	44.5 to 47.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	10	SF	$120	**$1,188**
101674	51.6 to 57.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	17	SF	$120	**$2,052**
101658	58.6 to 59.6 feet	**Vertical Change**	-.29"	3 ft	3	LF	$75	**$225**
101659	61.7 to 62.7 feet	**Vertical Change**	-.41"	3 ft	3	REF		
101675	61.9 to 64.6 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	8	SF	$120	**$972**
101676	65.6 to 68.3 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	8	SF	$120	**$972**
101677	69.3 to 70.8 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$540**
101678	73.8 to 78.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	15	SF	$120	**$1,800**
101679	79.3 to 83.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	12	SF	$120	**$1,440**
101697	85.2 to 96.5 feet	Key Note Segment		3 ft	34			
101660	86.5 to 87.5 feet	**Vertical Change**	-.38"	3 ft	3	REF		
101661	95.6 to 96.6 feet	**Vertical Change**	-.26"	3 ft	3	REF		
101680	97.1 to 100.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	10	SF	$120	**$1,224**
101662	100.0 to 101.0 feet	**Vertical Change**	.58"	3 ft	3	REF		
101681	101.8 to 109.5 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	23	SF	$120	**$2,772**
101682	111.6 to 112.6 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101663	112.4 to 113.4 feet	**Vertical Change**	.4"	3 ft	3	REF		
101683	113.4 to 114.6 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	4	SF	$120	**$432**
101684	117.8 to 119.5 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	5	SF	$120	**$612**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201141122	W CENTRAL AVE	JOY ST	ARAM AVE	105

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101685	120.8 to 125.0 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	13	SF	$120	**$1,512**
101686	125.7 to 126.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	3	SF	$120	**$360**
101687	127.8 to 129.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$540**
101688	132.1 to 133.2 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$396**
101689	133.2 to 134.7 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$540**
101664	133.6 to 134.6 feet	**Vertical Change**	-.52"	3 ft	3	REF		
101690	135.2 to 136.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	3	SF	$120	**$396**
101691	141.3 to 150.8 feet	Cross Slope (PAR)	7.0-8.0%	3 ft	29	SF	$120	**$3,420**
101692	153.2 to 154.8 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	5	SF	$120	**$576**
101665	154.7 to 155.7 feet	**Vertical Change**	-.27"	3 ft	3	REF		
101693	155.5 to 157.3 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	5	SF	$120	**$648**
101694	157.8 to 160.5 feet	Cross Slope (PAR)	6.0-7.0%	3 ft	8	SF	$120	**$972**
101695	162.3 to 163.8 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	5	SF	$120	**$540**
101666	165.6 to 166.6 feet	**Vertical Change**	-.77"	3 ft	3	SF	$75	**$225**
101667	170.2 to 171.2 feet	**Vertical Change**	.55"	3 ft	3	SF	$75	**$225**
101696	175.2 to 180.7 feet	Cross Slope (PAR)	8.0-9.0%	3 ft	17	SF	$120	**$1,980**

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **JOY ST** **$33,723.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041054	W CENTRAL AVE	N E ST	ALLEY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121121	3.9 to 4.9 feet	Vertical Change	.57"	5 ft	5	SF	$75	**$375**
121124	14.8 to 20.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
121125	34.5 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
121126	51.2 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
121129	66.4 to 111.1 feet	Key Note Segment		5 ft	223			
121122	67.0 to 68.0 feet	Vertical Change	-.85"	5 ft	5	REF		
121127	117.3 to 134.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
121128	141.9 to 149.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **N E ST** **$21,555.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041043	W CENTRAL AVE	N G ST	120 W CENTRAL AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121102	0.0 to 1.1 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	11	SF	$120	**$1,320**
121103	1.1 to 139.7 feet	Key Note Segment		10 ft	1386			
121099	20.5 to 21.5 feet	**Vertical Change**	.32"	10 ft	10	REF		
121100	35.7 to 36.7 feet	**Vertical Change**	1.02"	10 ft	10	REF		
121104	141.9 to 183.2 feet	Key Note Segment		10 ft	413			
121101	183.4 to 184.4 feet	**Vertical Change**	.52"	10 ft	10	REF		

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **N G ST** **$1,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041048	W CENTRAL AVE	N GATEWAY DR	713 W CENTRAL AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121107	0.3 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
121105	15.0 to 16.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
121108	16.3 to 34.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,680**
121109	36.4 to 39.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
121110	42.3 to 51.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
121111	54.3 to 61.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
121112	71.9 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
121113	73.7 to 75.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
121114	80.4 to 83.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
121115	103.4 to 128.3 feet	Key Note Segment		5 ft	125			
121106	105.0 to 106.0 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **N GATEWAY DR** **$32,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141049	W CENTRAL AVE	ORCHARD AVE	CENTRAL PL	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101128	1.3 to 10.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
101129	11.6 to 16.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
101130	16.8 to 23.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
101152	25.7 to 41.9 feet	Key Note Segment		5 ft	81			
101111	45.1 to 46.1 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
101112	50.8 to 51.8 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
101113	53.4 to 54.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
101131	53.8 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
101114	56.7 to 59.7 feet	**Vertical Change**	.39"	5 ft	15	REF		
101132	59.1 to 60.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
101115	62.0 to 66.7 feet	**Vertical Change**	.27"	5 ft	24	LF	$75	**$1,763**
101116	67.8 to 68.8 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
101117	70.0 to 75.4 feet	**Vertical Change**	.27"	5 ft	27	LF	$75	**$2,025**
101133	77.3 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
101118	77.5 to 80.5 feet	**Vertical Change**	.3"	5 ft	15	REF		
101153	79.2 to 92.8 feet	Key Note Segment		5 ft	68			
101134	99.5 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
101154	104.7 to 117.6 feet	Key Note Segment		5 ft	65			
101135	119.3 to 120.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
101119	121.7 to 122.7 feet	**Vertical Change**	.66"	5 ft	5	SF	$75	**$375**
101136	136.8 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
101137	155.0 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
101138	172.2 to 180.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
101139	182.1 to 183.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
101155	183.9 to 197.6 feet	Key Note Segment		5 ft	69			
101140	197.6 to 202.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$920**
101141	204.6 to 206.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
101156	209.6 to 223.6 feet	Key Note Segment		5 ft	70			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201141049	W CENTRAL AVE	ORCHARD AVE	CENTRAL PL	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
101142	224.4 to 225.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	5	SF	$40	$200
101120	227.5 to 228.5 feet	Vertical Change	.55"	5 ft	5	SF	$75	$375
101143	239.5 to 242.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
101121	241.5 to 242.5 feet	Vertical Change	.32"	5 ft	5	REF		
101144	244.9 to 246.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	$1,140
101145	249.0 to 250.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	$600
101159	251.6 to 252.6 feet		5.0-6.0%	5 ft	5			
101146	256.3 to 258.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	$1,080
101122	269.1 to 270.1 feet	Vertical Change	1.82"	5 ft	5	SF	$75	$375
101160	284.2 to 285.3 feet		6.0-7.0%	5 ft	6			
101157	287.8 to 300.8 feet	Key Note Segment		5 ft	65			
101123	302.0 to 303.0 feet	Vertical Change	1.26"	5 ft	5	SF	$75	$375
101124	305.1 to 306.1 feet	Vertical Change	.71"	5 ft	5	SF	$75	$375
101147	306.4 to 308.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
101148	310.7 to 313.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	$1,860
101158	313.8 to 326.6 feet	Key Note Segment		5 ft	64			
101149	330.5 to 335.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,180
101125	338.0 to 339.0 feet	Vertical Change	.51"	5 ft	5	SF	$75	$375
101150	341.1 to 342.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
101126	342.9 to 343.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	$375
101151	358.2 to 361.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
101127	361.4 to 362.4 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375

TOTAL COST FOR: S *side of* **W CENTRAL AVE** *Starting at:* **ORCHARD AVE** **$51,212.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201140934	W CENTRAL AVE	RIVERVIEW DR	CENTRAL PL	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99981	4.9 to 6.0 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
99982	8.8 to 11.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	7	SF	$120	**$792**
99983	21.4 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	9	SF	$120	**$1,044**
99976	22.2 to 23.2 feet	**Vertical Change**	.3"	3 ft	3	REF		
99984	27.1 to 28.1 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	3	SF	$120	**$360**
99985	36.9 to 38.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	6	SF	$120	**$720**
99997	43.3 to 73.6 feet	Key Note Segment		3 ft	91			
99977	43.7 to 44.7 feet	**Vertical Change**	.33"	3 ft	3	REF		
99978	60.7 to 61.7 feet	**Vertical Change**	-.29"	3 ft	3	REF		
99979	74.2 to 75.2 feet	**Vertical Change**	-.4"	3 ft	3	REF		
99986	75.3 to 77.3 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	6	SF	$120	**$720**
99987	95.5 to 96.8 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	4	SF	$120	**$468**
99988	100.7 to 105.1 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	13	SF	$120	**$1,584**
99989	105.1 to 106.3 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	4	SF	$120	**$432**
99990	113.1 to 118.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	17	SF	$120	**$2,088**
99991	121.4 to 133.0 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	35	SF	$120	**$4,176**
99992	135.2 to 136.4 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**
99993	144.3 to 145.3 feet	Cross Slope (PAR)	4.0-5.0%	3 ft	3	SF	$120	**$360**
99994	151.6 to 152.7 feet	Cross Slope (PAR)	3.0-4.0%	3 ft	3	SF	$120	**$396**
99995	152.7 to 155.9 feet	Cross Slope (PAR)	2.0-3.0%	3 ft	10	SF	$120	**$1,152**
99980	154.0 to 155.0 feet	**Vertical Change**	-.63"	3 ft	3	REF		
99996	158.5 to 159.7 feet	Cross Slope (PAR)	5.0-6.0%	3 ft	4	SF	$120	**$432**

TOTAL COST FOR: N *side of* **W CENTRAL AVE** *Starting at:* **RIVERVIEW DR** **$15,552.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311151	W CLARK ST	117 W CLARK ST	133 W CLARK ST	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114756	0.0 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
114768	3.6 to 23.5 feet	Key Note Segment		5 ft	100			
114748	14.2 to 15.2 feet	**Vertical Change**	.55"	5 ft	5	REF		
114757	25.8 to 43.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	88	SF	$120	**$10,560**
114773	31.3 to 32.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
114758	43.4 to 49.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
114759	49.2 to 65.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	81	SF	$120	**$9,660**
114769	66.2 to 85.4 feet	Key Note Segment		5 ft	96			
114749	76.3 to 77.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
114760	88.8 to 92.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
114770	92.3 to 113.7 feet	Key Note Segment		5 ft	107			
114761	115.6 to 152.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	187	SF	$120	**$22,380**
114751	152.1 to 153.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
114771	152.9 to 172.8 feet	Key Note Segment		5 ft	100			
114762	174.9 to 180.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
114772	180.5 to 199.5 feet	Key Note Segment		5 ft	95			
114752	180.9 to 181.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
114753	197.5 to 198.5 feet	**Vertical Change**	3.33"	5 ft	5	REF		
114754	199.9 to 200.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
114763	201.5 to 208.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,380**
114774	206.0 to 207.0 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
114764	208.8 to 209.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
114755	211.0 to 212.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
114765	211.4 to 217.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,360**
114766	217.6 to 219.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
114767	220.3 to 224.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**

TOTAL COST FOR: N *side of* **W CLARK ST** *Starting at:* **117 W CLARK ST** **$64,938.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011131	W CLARK ST	1410 COUNTRY CLUB DR	1410 COUNTRY CLUB DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116085	2.9 to 14.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,660**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **1410 COUNTRY CLUB DR** **$6,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011132	W CLARK ST	1410 COUNTRY CLUB DR	COUNTRY CLUB DR	28

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116086	1.6 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
116087	20.3 to 28.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
116088	31.1 to 33.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
116089	35.0 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
116090	41.2 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **1410 COUNTRY CLUB DR** **$10,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311153	W CLARK ST	1496 TAYLOR ST	TAYLOR ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114777	0.3 to 2.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
114778	6.7 to 12.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
114779	12.8 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	268	SF	$120	**$32,100**
114775	14.6 to 15.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
114776	23.6 to 24.6 feet	**Vertical Change**	-.57"	5 ft	5	REF		
114780	66.8 to 75.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
114781	75.9 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **1496 TAYLOR ST** **$43,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011129	W CLARK ST	1520 COUNTRY CLUB DR	1520 COUNTRY CLUB DR	33

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116084	4.2 to 8.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: N *side of* **W CLARK ST** *Starting at:* **1520 COUNTRY CLUB DR** **$2,400.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011059	W CLARK ST	322 W CLARK ST	OWENS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115896	0.0 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
115897	5.2 to 7.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
115898	16.3 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
115899	21.3 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
115900	30.1 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**
115901	43.9 to 50.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
115902	54.9 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
115903	68.3 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
115893	83.3 to 84.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
115904	83.9 to 85.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
115905	88.1 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
115906	93.2 to 94.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
115907	98.3 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
115908	112.7 to 119.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
115894	116.7 to 117.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
115909	122.3 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
115910	142.8 to 154.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
115911	156.8 to 177.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,180**
115895	162.0 to 163.0 feet	**Vertical Change**	-.46"	5 ft	5	REF		
115912	186.8 to 187.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
115913	195.5 to 202.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **322 W CLARK ST** **$78,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202011128	W CLARK ST	COUNTRY CLUB DR	1520 COUNTRY CLUB DR	38

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
116080	4.5 to 6.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
116081	8.8 to 13.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
116082	13.7 to 38.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
116083	38.3 to 57.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,520**

TOTAL COST FOR: N *side of* **W CLARK ST** *Starting at:* **COUNTRY CLUB DR** **$30,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011056	W CLARK ST	COUNTRY CLUB DR	330 W CLARK ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115837	1.8 to 2.8 feet	Vertical Change	.64"	4 ft	4	SF	$75	$300
115851	3.0 to 10.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	$3,600
115852	11.2 to 22.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	$5,568
115838	38.3 to 39.3 feet	Vertical Change	.33"	4 ft	4	LF	$75	$300
115853	45.6 to 49.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,920
115839	51.2 to 52.2 feet	Vertical Change	.48"	4 ft	4	LF	$75	$300
115854	54.6 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	$3,840
115840	64.1 to 65.1 feet	Vertical Change	.26"	4 ft	4	LF	$75	$300
115855	69.6 to 71.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$720
115841	71.9 to 72.9 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
115856	75.1 to 77.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$960
115842	80.5 to 81.5 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
115857	85.0 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	$2,112
115890	90.2 to 117.3 feet	Key Note Segment		4 ft	108			
115858	117.5 to 123.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	25	SF	$120	$3,024
115843	118.5 to 119.5 feet	Vertical Change	.36"	4 ft	4	REF		
115859	125.0 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	$7,296
115844	131.9 to 132.9 feet	Vertical Change	-.26"	4 ft	4	REF		
115860	140.2 to 150.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	40	SF	$120	$4,848
115861	153.2 to 158.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	20	SF	$120	$2,448
115862	162.7 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	$5,712
115863	177.3 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	74	SF	$120	$8,880
115845	183.7 to 184.7 feet	Vertical Change	.29"	4 ft	4	REF		
115864	199.7 to 207.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	30	SF	$120	$3,648
115865	208.7 to 224.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	$7,728
115866	228.1 to 242.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	59	SF	$120	$7,056
115867	244.8 to 250.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	22	SF	$120	$2,640
115868	251.4 to 256.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	$2,304

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202011056	W CLARK ST	COUNTRY CLUB DR	330 W CLARK ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
115869	258.9 to 260.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
115891	260.3 to 290.0 feet	Key Note Segment		4 ft	119			
115870	290.0 to 314.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	99	SF	$40	**$3,968**
115871	317.8 to 319.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
115872	319.4 to 326.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
115873	327.4 to 337.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$4,992**
115874	337.8 to 363.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	102	SF	$120	**$12,192**
115846	364.1 to 365.1 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
115875	366.2 to 397.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	125	SF	$120	**$15,024**
115876	402.3 to 406.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
115877	408.8 to 411.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
115878	416.2 to 460.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	176	SF	$120	**$21,072**
115847	456.1 to 457.1 feet	**Vertical Change**	.31"	4 ft	4	REF		
115879	462.2 to 463.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	7	SF	$120	**$816**
115880	465.3 to 468.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
115881	488.9 to 505.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	67	SF	$120	**$8,064**
115882	507.4 to 511.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,112**
115892	513.5 to 535.2 feet	Key Note Segment		4 ft	87			
115883	535.8 to 541.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
115884	547.9 to 566.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	74	SF	$120	**$8,880**
115885	570.7 to 582.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
115849	584.1 to 585.1 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
115886	587.1 to 605.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$8,976**
115887	608.2 to 614.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
115888	620.0 to 642.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,944**
115850	635.7 to 636.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
115889	646.7 to 660.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,672**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **COUNTRY CLUB DR** **$201,104.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201311149	W CLARK ST	SONORA ST	113 W CLARK ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114738	0.7 to 11.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
114739	16.0 to 17.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
114745	18.2 to 38.0 feet	Key Note Segment		5 ft	99			
114740	41.0 to 62.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	106	SF	$120	**$12,660**
114746	62.1 to 81.7 feet	Key Note Segment		5 ft	98			
114741	83.4 to 88.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
114747	88.2 to 113.2 feet	Key Note Segment		5 ft	125			
114734	97.5 to 98.5 feet	**Vertical Change**	1.04"	5 ft	5	REF		
114735	113.2 to 114.2 feet	**Vertical Change**	.37"	5 ft	5	REF		
114742	114.9 to 120.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,540**
114743	121.5 to 124.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
114744	130.4 to 137.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
114736	137.9 to 138.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
114737	146.6 to 147.6 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **W CLARK ST** *Starting at:* **SONORA ST** **$33,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201311209	W CLARK ST	TAYLOR ST	SONORA ST	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
114901	0.0 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
114902	29.8 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
114903	36.0 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
114904	59.9 to 80.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	105	SF	$120	**$12,540**
114905	81.2 to 82.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
114910	82.4 to 103.1 feet	Key Note Segment		5 ft	104			
114906	104.1 to 121.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	86	SF	$120	**$10,320**
114912	117.3 to 118.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
114907	121.4 to 124.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
114911	125.1 to 146.8 feet	Key Note Segment		5 ft	109			
114898	136.4 to 137.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
114899	146.7 to 147.7 feet	**Vertical Change**	.49"	5 ft	5	REF		
114908	150.1 to 153.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
114900	236.6 to 237.6 feet	**Vertical Change**	.57"	5 ft	5	SF	$75	**$375**
114909	238.2 to 247.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**

TOTAL COST FOR: S *side of* **W CLARK ST** *Starting at:* **TAYLOR ST** **$57,174.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041532	W CLEVELAND AVE	1030 N GATEWAY DR	1030 N GATEWAY DR	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122168	0.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	48	SF	$120	**$5,712**
122169	9.3 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	56	SF	$120	**$6,720**
122170	20.8 to 21.8 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	7	SF	$120	**$840**
122171	21.8 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	13	SF	$120	**$1,596**
122172	27.5 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	138	SF	$120	**$16,548**
122173	50.0 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	29	SF	$120	**$3,528**
122174	57.4 to 66.5 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	64	SF	$120	**$7,644**
122175	66.9 to 72.7 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	41	SF	$120	**$4,872**
122178	80.7 to 112.6 feet	Key Note Segment		7 ft	223			
122176	113.2 to 132.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	7 ft	137	SF	$40	**$5,488**
122177	132.8 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	16	SF	$120	**$1,932**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **1030 N GATEWAY DR** **$54,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041524	W CLEVELAND AVE	1850 W CLEVELAND AVE	1850 W CLEVELAND AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122127	0.0 to 10.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	86	SF	$120	**$10,368**
122122	3.4 to 4.4 feet	**Vertical Change**	.62"	8 ft	8	REF		
122123	8.0 to 9.0 feet	**Vertical Change**	.56"	8 ft	8	REF		
122128	13.7 to 25.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	97	SF	$120	**$11,616**
122129	28.4 to 66.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	302	SF	$120	**$36,288**
122130	68.6 to 74.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$6,048**
122131	77.3 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	250	SF	$120	**$30,048**
122124	78.1 to 79.1 feet	**Vertical Change**	.31"	8 ft	8	REF		
122125	90.7 to 91.7 feet	**Vertical Change**	.36"	8 ft	8	REF		
122132	111.1 to 114.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	29	SF	$120	**$3,456**
122133	114.9 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	251	SF	$120	**$30,144**
122134	146.3 to 163.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	135	SF	$120	**$16,224**
122135	165.6 to 166.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	**$1,248**
122136	166.9 to 180.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	107	SF	$120	**$12,864**
122137	182.9 to 186.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
122138	189.9 to 224.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	280	SF	$120	**$33,600**
122139	228.1 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	234	SF	$120	**$28,032**
122140	263.3 to 269.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$5,952**
122141	277.8 to 281.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
122142	289.8 to 292.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,400**
122126	291.6 to 292.6 feet	**Vertical Change**	3.03"	8 ft	8	REF		
122143	295.3 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	280	SF	$120	**$33,600**
122144	333.3 to 342.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	**$8,832**
122145	345.7 to 352.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	53	SF	$120	**$6,336**
122146	356.3 to 372.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	127	SF	$120	**$15,264**
122147	377.9 to 384.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	54	SF	$120	**$6,528**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **1850 W CLEVELAND AVE** **$305,376.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041231	W CLEVELAND AVE	1915 AVE 15 1/2	1915 AVE 15 1/2	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121384	0.0 to 42.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	337	SF	$120	**$40,416**
121385	42.6 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	8	SF	$120	**$960**
121386	47.4 to 49.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	13	SF	$120	**$1,536**
121387	49.0 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	214	SF	$120	**$25,728**
121388	76.0 to 82.4 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	51	SF	$120	**$6,144**
121413	82.5 to 123.1 feet	Key Note Segment		8 ft	325			
121375	117.7 to 118.7 feet	**Vertical Change**	-.27"	8 ft	8	REF		
121389	123.6 to 128.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	42	SF	$120	**$5,088**
121390	128.9 to 134.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	42	SF	$120	**$4,992**
121376	136.7 to 137.7 feet	**Vertical Change**	.35"	8 ft	8	LF	$75	**$600**
121391	138.8 to 143.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	35	SF	$120	**$4,224**
121414	144.8 to 185.9 feet	Key Note Segment		8 ft	329			
121392	186.5 to 187.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	11	SF	$40	**$448**
121393	190.6 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	110	SF	$120	**$13,152**
121394	204.3 to 209.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	39	SF	$120	**$4,704**
121377	205.6 to 206.6 feet	**Vertical Change**	-.63"	8 ft	8	REF		
121395	211.5 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	370	SF	$120	**$44,448**
121396	261.0 to 270.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	74	SF	$120	**$8,832**
121397	273.0 to 286.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	104	SF	$120	**$12,480**
121398	286.0 to 287.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	12	SF	$120	**$1,440**
121399	289.7 to 309.4 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	158	SF	$120	**$18,912**
121378	294.0 to 295.0 feet	**Vertical Change**	2.77"	8 ft	8	REF		
121400	310.2 to 322.8 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	101	SF	$120	**$12,096**
121401	324.4 to 329.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	37	SF	$120	**$4,416**
121402	329.2 to 332.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	27	SF	$120	**$3,264**
121379	333.0 to 334.0 feet	**Vertical Change**	-.44"	8 ft	8	REF		
121403	333.0 to 334.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	9	SF	$120	**$1,056**
121415	335.8 to 363.3 feet	Key Note Segment		8 ft	220			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041231	W CLEVELAND AVE	1915 AVE 15 1/2	1915 AVE 15 1/2	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121380	348.5 to 349.5 feet	Vertical Change	-.29"	8 ft	8	REF		
121404	364.4 to 367.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	24	SF	$120	$2,880
121381	369.6 to 370.6 feet	Vertical Change	3.11"	8 ft	8	SF	$75	$600
121382	375.7 to 376.7 feet	Vertical Change	-.31"	8 ft	8	REF		
121405	376.2 to 379.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	23	SF	$120	$2,784
121416	382.1 to 415.5 feet	Key Note Segment		8 ft	267			
121406	417.3 to 432.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	123	SF	$120	$14,784
121407	434.2 to 448.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	114	SF	$120	$13,728
121408	450.6 to 454.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	$3,648
121409	469.4 to 489.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	157	SF	$120	$18,816
121417	489.0 to 518.8 feet	Key Note Segment		8 ft	238			
121418	523.3 to 548.5 feet	Key Note Segment		8 ft	202			
121410	549.0 to 550.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	$1,248
121411	550.3 to 595.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	364	SF	$120	$43,680
121383	559.0 to 560.0 feet	Vertical Change	.3"	8 ft	8	REF		
121412	597.9 to 600.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	$2,592

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **1915 AVE 15 1/2** **$319,696.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041521	W CLEVELAND AVE	1930 W CLEVELAND AVE	1900 W CLEVELAND AVE	40

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122107	1.2 to 5.9 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	38	SF	$120	**$4,512**
122108	6.1 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	62	SF	$120	**$7,392**
122109	26.3 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	166	SF	$120	**$19,968**
122110	50.2 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
122111	54.2 to 69.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	122	SF	$120	**$14,688**
122112	81.8 to 165.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	671	SF	$120	**$80,544**
122113	169.8 to 197.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	222	SF	$120	**$26,592**
122114	200.1 to 218.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	145	SF	$120	**$17,376**
122115	220.4 to 230.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	79	SF	$120	**$9,504**
122116	231.6 to 262.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	247	SF	$120	**$29,664**
122117	265.6 to 293.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	223	SF	$120	**$26,784**
122118	296.5 to 307.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	86	SF	$120	**$10,368**
122119	307.5 to 342.2 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	278	SF	$120	**$33,312**
122120	349.0 to 361.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	102	SF	$120	**$12,288**
122121	361.8 to 364.0 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	18	SF	$120	**$2,112**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **1930 W CLEVELAND AVE** **$296,160.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041237	W CLEVELAND AVE	1977 W CLEVELAND AVE	1977 W CLEVELAND AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121437	0.0 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
121438	11.0 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
121439	17.9 to 23.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
121440	28.5 to 43.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
121441	46.1 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
121442	65.7 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
121443	79.3 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
121444	102.3 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,200**
121445	124.3 to 148.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	119	SF	$120	**$14,220**
121446	148.8 to 160.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
121447	160.9 to 177.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
121448	177.9 to 180.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
121449	181.1 to 188.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **1977 W CLEVELAND AVE** **$96,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041518	W CLEVELAND AVE	2020 W CLEVELAND AVE	2020 W CLEVELAND AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122088	0.0 to 1.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	8	SF	$120	**$960**
122089	1.0 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	45	SF	$120	**$5,376**
122090	8.7 to 59.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	403	SF	$120	**$48,384**
122091	63.4 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
122092	67.8 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	72	SF	$120	**$8,640**
122086	77.2 to 78.2 feet	**Vertical Change**	.27"	8 ft	8	LF	$75	**$600**
122093	80.5 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	78	SF	$120	**$9,408**
122094	93.4 to 119.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	211	SF	$40	**$8,448**
122095	123.3 to 133.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,888**
122096	134.5 to 139.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	38	SF	$120	**$4,608**
122097	139.3 to 140.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	9	SF	$120	**$1,056**
122098	143.1 to 149.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	50	SF	$120	**$5,952**
122099	149.8 to 186.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	297	SF	$120	**$35,616**
122100	189.3 to 241.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	416	SF	$120	**$49,920**
122101	243.4 to 249.7 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	50	SF	$120	**$6,048**
122102	249.8 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	364	SF	$120	**$43,680**
122103	295.5 to 305.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	78	SF	$120	**$9,312**
122104	307.3 to 311.2 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	31	SF	$120	**$3,744**
122105	314.6 to 319.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	40	SF	$120	**$4,800**
122106	321.8 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	68	SF	$120	**$8,160**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **2020 W CLEVELAND AVE** **$265,656.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041234	W CLEVELAND AVE	2037 W CLEVELAND AVE	2037 W CLEVELAND AVE	31

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121421	0.3 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	245	SF	$120	**$29,400**
121422	51.8 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
121419	58.9 to 59.9 feet	**Vertical Change**	-.32"	5 ft	5	REF		
121423	59.7 to 67.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
121424	67.0 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**
121420	84.4 to 85.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
121425	98.5 to 104.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
121426	104.5 to 111.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
121427	115.5 to 116.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
121428	119.2 to 136.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,440**
121429	137.4 to 173.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	**$21,420**
121430	176.7 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
121431	183.6 to 184.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
121432	185.8 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
121433	201.9 to 210.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
121434	212.8 to 220.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
121435	222.8 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **2037 W CLEVELAND AVE** **$115,920.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041239	W CLEVELAND AVE	2147 W CLEVELAND AVE	2147 W CLEVELAND AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121451	7.9 to 9.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
121452	29.4 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
121450	39.0 to 40.0 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
121453	45.3 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
121454	58.1 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
121455	73.6 to 82.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
121456	82.0 to 86.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
121457	92.4 to 96.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
121458	99.8 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
121459	107.8 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
121460	117.7 to 127.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
121461	127.2 to 135.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
121462	140.3 to 141.8 feet		7.0-8.0%	5 ft	8			

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **2147 W CLEVELAND AVE** **$46,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041242	W CLEVELAND AVE	2201 W CLEVELAND AVE	N SCHNOOR AVE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121468	8.4 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	223	SF	$120	**$26,700**
121469	56.1 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
121470	63.9 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
121471	70.2 to 95.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	127	SF	$120	**$15,240**
121463	77.3 to 78.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
121472	97.7 to 99.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
121464	100.2 to 101.2 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
121473	101.5 to 102.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
121474	106.2 to 122.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	82	SF	$120	**$9,780**
121465	116.9 to 117.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
121475	122.5 to 157.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	177	SF	$120	**$21,180**
121466	143.5 to 144.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
121476	160.2 to 172.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,380**
121477	172.8 to 185.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
121478	185.8 to 194.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
121479	195.1 to 205.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
121480	207.8 to 243.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	179	SF	$120	**$21,420**
121467	234.3 to 238.2 feet	**Vertical Change**	.26"	5 ft	20	REF		
121481	243.5 to 244.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **2201 W CLEVELAND AVE** **$130,395.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041513	W CLEVELAND AVE	2220 W CLEVELAND AVE	2180 W CLEVELAND AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122065	0.0 to 6.5 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	52	SF	$120	**$6,240**
122066	6.8 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	68	SF	$120	**$8,160**
122067	17.6 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	20	SF	$120	**$2,400**
122068	24.0 to 27.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	**$2,976**
122069	33.0 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	38	SF	$120	**$4,608**
122070	37.8 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	46	SF	$120	**$5,472**
122071	45.7 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	34	SF	$120	**$4,128**
122072	54.3 to 77.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	188	SF	$120	**$22,560**
122080	88.0 to 97.2 feet	Key Note Segment		8 ft	74			
122073	98.2 to 103.4 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	42	SF	$120	**$4,992**
122074	103.8 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	44	SF	$120	**$5,280**
122081	105.5 to 106.8 feet		11.0-12.0%	8 ft	10			
122082	120.7 to 122.5 feet		5.0-6.0%	8 ft	14			
122083	122.8 to 126.3 feet		6.0-7.0%	8 ft	28			
122084	126.3 to 130.8 feet		5.0-6.0%	8 ft	36			
122085	126.3 to 130.8 feet	Running Slope	5.0-6.0%	8 ft	36	SF	$120	**$4,320**
122075	136.4 to 141.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	42	SF	$120	**$4,992**
122061	138.9 to 139.9 feet	**Vertical Change**	-.3"	8 ft	8	REF		
122076	148.0 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	70	SF	$120	**$8,352**
122062	155.2 to 156.2 feet	**Vertical Change**	-.37"	8 ft	8	REF		
122077	158.8 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	142	SF	$120	**$17,088**
122063	166.0 to 167.0 feet	**Vertical Change**	-.37"	8 ft	8	REF		
122078	184.7 to 192.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	59	SF	$120	**$7,104**
122079	195.2 to 267.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	578	SF	$120	**$69,312**
122064	201.3 to 202.3 feet	**Vertical Change**	.36"	8 ft	8	REF		

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **2220 W CLEVELAND AVE** **$177,984.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141003	W CLEVELAND AVE	2310 W CLEVELAND AVE	N SCHNOOR AVE	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64881	0.1 to 5.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
64882	15.3 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
64883	25.8 to 42.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,140**
64884	47.2 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
64873	47.8 to 48.8 feet	**Vertical Change**	.41"	5 ft	5	REF		
64885	55.3 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
64886	59.3 to 66.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
64887	69.0 to 70.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
64888	71.9 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64874	72.0 to 73.0 feet	**Vertical Change**	.36"	5 ft	5	REF		
64889	76.1 to 80.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
64890	85.0 to 86.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64891	92.4 to 98.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
64892	99.5 to 103.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
64893	106.4 to 109.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
64894	109.5 to 110.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
64895	118.2 to 120.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
64896	122.9 to 125.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
64876	125.5 to 126.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
64877	127.2 to 128.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
64897	127.7 to 129.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
64898	132.0 to 141.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
64878	135.4 to 136.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
64879	142.6 to 143.6 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
64880	144.8 to 145.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
64899	145.8 to 147.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64900	147.8 to 149.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **2310 W CLEVELAND AVE** **$53,190.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141001	W CLEVELAND AVE	2350 W CLEVELAND AVE	2350 W CLEVELAND AVE	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64863	1.9 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
64864	10.4 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
64865	18.6 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	309	SF	$120	**$37,140**
64857	62.9 to 63.9 feet	**Vertical Change**	.33"	5 ft	5	REF		
64858	87.8 to 88.8 feet	**Vertical Change**	-.41"	5 ft	5	REF		
64866	88.7 to 93.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
64859	95.5 to 96.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
64867	95.9 to 106.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
64860	104.7 to 105.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
64868	108.2 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
64861	112.9 to 113.9 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
64869	118.1 to 125.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
64862	129.2 to 130.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
64870	129.2 to 134.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
64871	137.0 to 143.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
64872	142.5 to 143.6 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **2350 W CLEVELAND AVE** **$65,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141007	W CLEVELAND AVE	2377 W CLEVELAND AVE	2339 W CLEVELAND AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64918	1.5 to 4.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
64919	4.9 to 7.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
64913	24.7 to 25.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
64920	26.4 to 37.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
64921	56.1 to 62.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
64922	74.7 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
64923	86.1 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
64924	97.3 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
64925	104.4 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
64926	120.0 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	84	SF	$120	**$10,080**
64927	140.4 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
64928	149.1 to 158.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
64929	160.8 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
64914	171.8 to 172.8 feet	**Vertical Change**	-.5"	5 ft	5	SF	$75	**$375**
64930	196.4 to 199.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
64931	213.9 to 217.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
64932	229.2 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
64933	235.3 to 245.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
64934	252.3 to 284.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	**$19,260**
64935	288.8 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	128	SF	$120	**$15,300**
64915	300.5 to 301.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64916	311.0 to 312.0 feet	**Vertical Change**	-.28"	5 ft	5	REF		
64936	314.4 to 327.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,740**
64937	328.6 to 330.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **2377 W CLEVELAND AVE** **$100,650.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141009	W CLEVELAND AVE	2401 W CLEVELAND AVE	ASPEN LN	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64940	0.8 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	123	SF	$120	**$14,760**
64941	26.8 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
64942	35.8 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
64943	46.3 to 50.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
64944	53.4 to 57.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
64945	61.1 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
64938	70.0 to 71.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
64946	80.3 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
64947	115.9 to 119.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
64939	119.4 to 120.4 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **2401 W CLEVELAND AVE** **$61,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150735	W CLEVELAND AVE	3300 CAMINO CT	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65876	1.7 to 2.7 feet	Vertical Change	3.44"	5 ft	5	SF	$75	$375
65877	3.7 to 4.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
65884	16.4 to 20.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,340
65878	20.9 to 21.9 feet	Vertical Change	1.63"	5 ft	5	SF	$75	$375
65885	23.1 to 44.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	$12,900
65879	61.2 to 62.2 feet	Vertical Change	-.36"	5 ft	5	LF	$75	$375
65886	62.3 to 66.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
65887	69.1 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
65880	79.9 to 80.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
65888	88.0 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	160	SF	$120	$19,200
65881	92.6 to 93.6 feet	Vertical Change	-.29"	5 ft	5	REF		
65882	116.8 to 117.8 feet	Vertical Change	.3"	5 ft	5	REF		
65889	124.1 to 127.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,160
65890	129.3 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	179	SF	$120	$21,540
65883	140.9 to 141.9 feet	Vertical Change	-.36"	5 ft	5	REF		
65891	167.8 to 169.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
65892	173.8 to 179.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	$3,420
65893	179.5 to 184.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	$2,820
65894	186.3 to 201.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	$9,000
65895	205.2 to 208.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
65896	210.2 to 225.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	76	SF	$120	$9,120
65897	226.6 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,620
65898	241.8 to 243.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$960
65899	244.3 to 247.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
65900	249.7 to 254.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$2,940
65901	265.3 to 266.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
65902	276.8 to 298.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	$12,900
65903	318.0 to 324.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,080

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150735	W CLEVELAND AVE	3300 CAMINO CT	N WESTBERRY BLV	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65904	328.6 to 330.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
65905	332.4 to 346.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **3300 CAMINO CT** **$131,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150803	W CLEVELAND AVE	ASPEN LN	SUNDANCE LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66165	0.9 to 13.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,440**
66166	14.3 to 20.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
66167	20.8 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
66168	25.7 to 32.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,080**
66169	45.8 to 47.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
66170	52.6 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66171	55.3 to 67.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
66172	68.3 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
66173	83.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
66174	97.0 to 100.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
66175	100.4 to 109.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,580**
66176	111.8 to 120.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
66177	120.9 to 122.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
66178	122.7 to 131.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
66179	134.5 to 137.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
66145	142.5 to 143.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
66180	157.9 to 164.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
66181	167.4 to 174.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
66182	175.3 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
66146	179.4 to 180.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
66183	180.2 to 181.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
66184	191.5 to 193.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
66185	195.3 to 207.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
66186	207.4 to 213.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
66187	215.8 to 218.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,620**
66188	221.8 to 225.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	20	SF	$120	**$2,400**
66147	223.8 to 224.8 feet	**Vertical Change**	1.17"	5 ft	5	REF		
66148	227.6 to 228.6 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150803	W CLEVELAND AVE	ASPEN LN	SUNDANCE LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66189	243.9 to 244.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
66190	248.8 to 252.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
66256	254.9 to 256.6 feet		5.0-6.0%	5 ft	9			
66191	255.2 to 257.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
66149	258.2 to 259.2 feet	**Vertical Change**	1.2"	5 ft	5	SF	$75	**$375**
66192	260.9 to 266.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
66193	266.9 to 269.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
66194	272.3 to 277.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
66195	278.5 to 282.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,340**
66196	284.3 to 295.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
66150	287.0 to 288.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
66197	300.1 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
66198	306.1 to 317.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
66199	318.6 to 321.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
66151	323.0 to 326.3 feet	**Vertical Change**	3.36"	5 ft	17	SF	$75	**$1,238**
66200	326.0 to 327.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
66201	327.3 to 338.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
66202	341.0 to 350.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
66152	350.0 to 353.1 feet	**Vertical Change**	.32"	5 ft	16	REF		
66203	352.2 to 356.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
66204	356.5 to 363.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
66205	368.0 to 379.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,140**
66206	380.7 to 385.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
66153	391.7 to 392.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
66207	399.5 to 411.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
66208	416.9 to 418.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
66155	417.1 to 418.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
66209	421.8 to 422.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150803	W CLEVELAND AVE	ASPEN LN	SUNDANCE LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66156	424.2 to 425.2 feet	Vertical Change	.6"	5 ft	5	REF		
66210	424.4 to 427.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	$1,740
66211	429.0 to 436.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,560
66157	436.5 to 437.5 feet	Vertical Change	.71"	5 ft	5	REF		
66212	438.7 to 441.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
66213	441.5 to 442.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
66214	445.9 to 452.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	$4,140
66215	455.9 to 462.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	33	SF	$120	$3,900
66216	464.7 to 466.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$780
66217	468.2 to 471.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
66218	477.8 to 481.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	$2,280
66158	490.9 to 491.9 feet	Vertical Change	1.36"	5 ft	5	SF	$75	$375
66219	499.2 to 502.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
66220	504.8 to 505.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
66221	505.9 to 507.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
66222	520.0 to 527.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	$4,560
66223	554.7 to 559.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
66224	578.3 to 591.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	$7,740
66225	647.3 to 650.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
66226	659.4 to 660.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
66227	663.2 to 670.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	$4,320
66228	672.1 to 673.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
66229	677.3 to 678.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
66230	679.3 to 680.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
66159	697.6 to 698.6 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
66231	706.0 to 711.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	$3,360
66232	714.2 to 716.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	$1,260
66233	718.7 to 723.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	23	SF	$120	$2,760

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150803	W CLEVELAND AVE	ASPEN LN	SUNDANCE LN	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66234	724.5 to 730.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,780**
66235	733.1 to 734.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
66236	745.8 to 772.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,720**
66237	772.2 to 777.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
66238	779.7 to 781.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66161	780.1 to 781.1 feet	**Vertical Change**	.29"	5 ft	5	REF		
66239	785.1 to 792.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
66240	793.3 to 797.9 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	23	SF	$120	**$2,760**
66162	796.8 to 797.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
66241	797.9 to 799.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
66242	803.1 to 808.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
66243	809.6 to 813.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**
66244	813.4 to 814.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
66245	817.3 to 821.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
66163	820.6 to 821.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
66246	824.2 to 827.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
66247	828.5 to 840.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
66248	841.3 to 845.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
66249	845.4 to 856.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
66250	856.2 to 863.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
66251	863.3 to 865.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
66252	870.9 to 875.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
66253	887.2 to 891.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
66254	894.3 to 900.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
66257	900.5 to 902.8 feet		5.0-6.0%	5 ft	12			
66258	900.5 to 902.8 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
66255	901.0 to 902.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **ASPEN LN** **$281,767.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041225	W CLEVELAND AVE	CURB RAMP	CURB RAMP	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121352	0.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
121353	7.2 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,648**
121354	17.3 to 25.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,792**
121355	27.4 to 35.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	30	SF	$120	**$3,648**
121350	30.0 to 31.0 feet	**Vertical Change**	.26"	4 ft	4	REF		
121356	35.3 to 37.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
121357	37.2 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,184**
121358	49.1 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	45	SF	$120	**$5,376**
121359	64.5 to 86.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	89	SF	$120	**$10,704**
121351	78.7 to 79.7 feet	**Vertical Change**	.3"	4 ft	4	REF		
121360	87.1 to 102.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	63	SF	$120	**$7,536**
121361	103.3 to 120.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	69	SF	$120	**$8,256**
121362	120.8 to 132.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,808**
121363	133.1 to 212.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	319	SF	$120	**$38,256**
121364	212.8 to 214.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
121365	216.8 to 227.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
121366	232.8 to 236.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
121367	239.5 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	95	SF	$120	**$11,424**
121368	263.3 to 266.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
121369	266.8 to 275.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	33	SF	$120	**$3,936**
121370	276.2 to 281.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	22	SF	$120	**$2,592**
121371	281.6 to 284.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
121372	288.2 to 289.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
121373	292.1 to 294.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	8	SF	$120	**$912**
121374	297.1 to 307.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,848**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **CURB RAMP** **$131,232.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041528	W CLEVELAND AVE	CURB RAMP	CURB RAMP	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122148	0.0 to 1.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
122149	8.9 to 50.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	166	SF	$120	**$19,920**
122150	51.9 to 55.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
122151	58.0 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
122152	64.6 to 75.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	43	SF	$120	**$5,136**
122153	80.3 to 105.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	101	SF	$120	**$12,144**
122154	106.8 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
122155	127.1 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	136	SF	$120	**$16,320**
122156	161.1 to 164.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**
122157	164.8 to 176.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
122158	178.6 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
122159	184.1 to 206.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	90	SF	$120	**$10,800**
122160	206.8 to 259.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	212	SF	$120	**$25,392**
122161	259.7 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
122162	265.7 to 278.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,240**
122163	280.2 to 289.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
122164	290.6 to 292.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$816**
122165	292.3 to 294.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	9	SF	$120	**$1,104**
122166	294.6 to 296.9 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	9	SF	$120	**$1,104**
122167	296.9 to 301.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	17	SF	$120	**$2,016**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **CURB RAMP** **$127,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65997	19.8 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	71	SF	$120	**$8,520**
65998	41.3 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	24	SF	$120	**$2,880**
65999	46.8 to 50.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	40	SF	$120	**$4,800**
66000	55.4 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	194	SF	$120	**$23,280**
66001	77.9 to 81.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	35	SF	$120	**$4,200**
66002	81.8 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	75	SF	$120	**$9,000**
66003	92.4 to 98.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	57	SF	$120	**$6,840**
66004	99.0 to 103.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	45	SF	$120	**$5,400**
66005	105.6 to 111.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	57	SF	$120	**$6,840**
66006	111.5 to 130.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	193	SF	$120	**$23,160**
65946	116.5 to 117.5 feet	**Vertical Change**	.36"	10 ft	10	REF		
66007	132.9 to 143.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	109	SF	$120	**$13,080**
66008	143.8 to 161.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	173	SF	$120	**$20,760**
66009	166.1 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	119	SF	$120	**$14,280**
65947	180.0 to 181.0 feet	**Vertical Change**	2.06"	10 ft	10	REF		
66010	180.3 to 192.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	122	SF	$120	**$14,640**
66011	197.4 to 206.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	89	SF	$120	**$10,680**
66012	207.3 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	263	SF	$120	**$31,560**
66013	235.7 to 238.2 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	25	SF	$120	**$3,000**
66014	239.5 to 242.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	25	SF	$120	**$3,000**
66015	247.3 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	210	SF	$120	**$25,200**
66016	276.3 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	265	SF	$120	**$31,800**
65948	299.8 to 300.8 feet	**Vertical Change**	3.47"	10 ft	10	REF		
65949	302.7 to 303.7 feet	**Vertical Change**	-.37"	10 ft	10	REF		
65950	304.6 to 305.6 feet	**Vertical Change**	1.33"	10 ft	10	REF		
66017	305.4 to 311.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	61	SF	$120	**$7,320**
65951	308.7 to 309.7 feet	**Vertical Change**	.26"	10 ft	10	REF		
65952	315.7 to 316.7 feet	**Vertical Change**	1.7"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66018	315.8 to 318.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	23	SF	$120	**$2,760**
66019	321.8 to 323.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	13	SF	$120	**$1,560**
65953	323.8 to 324.8 feet	**Vertical Change**	.36"	10 ft	10	LF	$75	**$750**
66020	328.5 to 332.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	44	SF	$120	**$5,280**
65954	328.8 to 329.8 feet	**Vertical Change**	.39"	10 ft	10	REF		
65955	335.6 to 336.6 feet	**Vertical Change**	.85"	10 ft	10	REF		
66021	336.4 to 342.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	58	SF	$120	**$6,960**
65956	338.8 to 339.8 feet	**Vertical Change**	.49"	10 ft	10	REF		
65957	341.9 to 342.9 feet	**Vertical Change**	.32"	10 ft	10	REF		
66022	346.5 to 360.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	135	SF	$120	**$16,200**
65958	350.6 to 351.6 feet	**Vertical Change**	.26"	10 ft	10	REF		
65959	363.5 to 364.5 feet	**Vertical Change**	.27"	10 ft	10	LF	$75	**$750**
66023	384.4 to 389.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	54	SF	$120	**$6,480**
66024	393.0 to 396.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	32	SF	$120	**$3,840**
66025	401.6 to 403.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	17	SF	$120	**$2,040**
66026	407.2 to 412.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	53	SF	$120	**$6,360**
66027	418.3 to 422.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	45	SF	$120	**$5,400**
65960	423.4 to 424.4 feet	**Vertical Change**	.56"	10 ft	10	SF	$75	**$750**
66028	428.8 to 433.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	44	SF	$120	**$5,280**
66112	439.2 to 477.8 feet	Key Note Segment		10 ft	386			
65961	445.3 to 446.3 feet	**Vertical Change**	.51"	10 ft	10	REF		
65962	454.4 to 455.4 feet	**Vertical Change**	.26"	10 ft	10	REF		
65963	478.4 to 479.4 feet	**Vertical Change**	-.44"	10 ft	10	REF		
66029	479.3 to 485.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	59	SF	$120	**$7,080**
65964	483.7 to 484.7 feet	**Vertical Change**	.26"	10 ft	10	REF		
66030	488.5 to 546.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	582	SF	$120	**$69,840**
65965	528.8 to 529.8 feet	**Vertical Change**	.28"	10 ft	10	LF	$75	**$750**
66031	550.3 to 563.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	129	SF	$120	**$15,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66032	567.0 to 577.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	104	SF	$120	**$12,480**
66033	580.3 to 581.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	12	SF	$120	**$1,440**
66034	582.7 to 590.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	73	SF	$120	**$8,760**
65966	593.2 to 594.2 feet	**Vertical Change**	.29"	10 ft	10	LF	$75	**$750**
66035	602.9 to 609.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	64	SF	$120	**$7,680**
65967	604.5 to 605.5 feet	**Vertical Change**	.26"	10 ft	10	REF		
65968	606.5 to 607.5 feet	**Vertical Change**	-.26"	10 ft	10	REF		
65969	608.2 to 609.2 feet	**Vertical Change**	3.1"	10 ft	10	REF		
65970	614.2 to 615.2 feet	**Vertical Change**	.39"	10 ft	10	LF	$75	**$750**
66036	624.3 to 629.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	55	SF	$120	**$6,600**
65971	640.5 to 641.5 feet	**Vertical Change**	-.35"	10 ft	10	REF		
66037	641.1 to 648.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	71	SF	$120	**$8,520**
65972	649.0 to 650.0 feet	**Vertical Change**	.33"	10 ft	10	LF	$75	**$750**
66038	653.1 to 655.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	24	SF	$120	**$2,880**
65973	666.1 to 667.1 feet	**Vertical Change**	-.26"	10 ft	10	LF	$75	**$750**
66039	682.3 to 692.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	104	SF	$120	**$12,480**
66040	692.8 to 697.9 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	51	SF	$120	**$6,120**
65974	696.3 to 697.3 feet	**Vertical Change**	.26"	10 ft	10	REF		
66041	699.6 to 705.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	63	SF	$120	**$7,560**
66042	712.5 to 718.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	56	SF	$120	**$6,720**
66043	721.0 to 736.2 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	152	SF	$120	**$18,240**
66044	736.5 to 744.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	79	SF	$120	**$9,480**
66045	744.4 to 782.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	384	SF	$120	**$46,080**
65975	772.9 to 773.9 feet	**Vertical Change**	.43"	10 ft	10	REF		
66046	786.8 to 798.8 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	120	SF	$120	**$14,400**
66047	801.5 to 808.0 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	65	SF	$120	**$7,800**
65976	804.9 to 805.9 feet	**Vertical Change**	.4"	10 ft	10	REF		
66048	808.3 to 818.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	101	SF	$120	**$12,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66049	821.5 to 847.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	259	SF	$120	**$31,080**
66050	847.6 to 862.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	147	SF	$120	**$17,640**
65977	864.2 to 865.2 feet	**Vertical Change**	.26"	10 ft	10	REF		
66051	864.9 to 866.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	17	SF	$120	**$2,040**
66052	868.8 to 870.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	16	SF	$120	**$1,920**
66053	870.4 to 881.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	114	SF	$120	**$13,680**
66054	912.8 to 915.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	30	SF	$120	**$3,600**
66055	923.8 to 925.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	15	SF	$120	**$1,800**
65978	924.8 to 925.8 feet	**Vertical Change**	.39"	10 ft	10	REF		
66056	926.8 to 939.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	125	SF	$120	**$15,000**
65979	933.5 to 934.5 feet	**Vertical Change**	.32"	10 ft	10	REF		
66057	941.8 to 945.6 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	38	SF	$120	**$4,560**
66058	945.6 to 952.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	66	SF	$120	**$7,920**
65981	954.7 to 955.7 feet	**Vertical Change**	.28"	10 ft	10	LF	$75	**$750**
66059	962.8 to 970.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	80	SF	$120	**$9,600**
66060	970.8 to 972.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	15	SF	$120	**$1,800**
66061	976.3 to 981.7 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	54	SF	$120	**$6,480**
66062	981.7 to 1020.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	389	SF	$120	**$46,680**
65982	1010.4 to 1011.4 feet	**Vertical Change**	.4"	10 ft	10	REF		
66063	1026.5 to 1033.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	70	SF	$120	**$8,400**
66064	1037.0 to 1045.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	87	SF	$120	**$10,440**
66065	1048.8 to 1067.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	188	SF	$120	**$22,560**
66066	1067.6 to 1091.1 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	235	SF	$120	**$28,200**
66067	1091.4 to 1127.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	357	SF	$120	**$42,840**
66068	1130.5 to 1138.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	82	SF	$120	**$9,840**
65984	1131.6 to 1132.6 feet	**Vertical Change**	.26"	10 ft	10	REF		
66069	1138.8 to 1145.6 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	68	SF	$120	**$8,160**
66070	1146.3 to 1148.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66071	1153.8 to 1164.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	110	SF	$120	**$13,200**
65985	1155.1 to 1156.1 feet	**Vertical Change**	.39"	10 ft	10	REF		
66072	1170.4 to 1189.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	194	SF	$120	**$23,280**
65986	1184.9 to 1188.9 feet	**Vertical Change**	.29"	10 ft	40	REF		
66073	1196.8 to 1204.0 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	72	SF	$120	**$8,640**
66074	1206.6 to 1212.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	59	SF	$120	**$7,080**
66075	1220.8 to 1223.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	27	SF	$120	**$3,240**
66076	1226.0 to 1229.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	38	SF	$120	**$4,560**
66077	1237.2 to 1240.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	33	SF	$120	**$3,960**
66078	1242.8 to 1262.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	196	SF	$120	**$23,520**
65987	1246.6 to 1247.6 feet	**Vertical Change**	.31"	10 ft	10	REF		
65988	1258.5 to 1259.5 feet	**Vertical Change**	.36"	10 ft	10	REF		
66079	1265.3 to 1282.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	169	SF	$120	**$20,280**
66080	1285.7 to 1287.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	**$1,920**
66081	1295.0 to 1297.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	22	SF	$120	**$2,640**
65989	1299.3 to 1300.3 feet	**Vertical Change**	.27"	10 ft	10	LF	$75	**$750**
66082	1301.7 to 1303.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	17	SF	$120	**$2,040**
66083	1323.2 to 1328.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	51	SF	$120	**$6,120**
65990	1332.7 to 1333.7 feet	**Vertical Change**	.97"	10 ft	10	REF		
66084	1333.1 to 1336.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	37	SF	$120	**$4,440**
66085	1339.1 to 1343.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	42	SF	$120	**$5,040**
66086	1346.8 to 1355.4 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	86	SF	$120	**$10,320**
66087	1358.1 to 1365.2 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	71	SF	$120	**$8,520**
66088	1367.3 to 1368.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	10	SF	$120	**$1,200**
66089	1368.3 to 1369.9 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	16	SF	$120	**$1,920**
66090	1372.2 to 1373.8 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	16	SF	$120	**$1,920**
66091	1375.4 to 1392.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	170	SF	$120	**$20,400**
65991	1387.6 to 1388.6 feet	**Vertical Change**	-.33"	10 ft	10	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150748	W CLEVELAND AVE	GLADE AVE	FOXGLOVE WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65992	1395.9 to 1396.9 feet	Vertical Change	.53"	10 ft	10	SF	$75	$750
66092	1416.8 to 1419.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	25	SF	$120	$3,000
66093	1423.8 to 1434.3 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	105	SF	$120	$12,600
66094	1436.2 to 1444.1 feet	Cross Slope (PAR)	4.0-5.0%	10 ft	79	SF	$120	$9,480
66095	1444.1 to 1447.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	33	SF	$120	$3,960
66096	1451.3 to 1453.1 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	18	SF	$120	$2,160
66097	1453.1 to 1461.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	85	SF	$120	$10,200
66098	1465.5 to 1467.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	21	SF	$120	$2,520
66099	1470.1 to 1473.7 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	36	SF	$120	$4,320
66100	1478.8 to 1482.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	38	SF	$120	$4,560
66101	1485.7 to 1499.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	134	SF	$120	$16,080
66102	1502.8 to 1512.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	100	SF	$120	$12,000
66103	1517.7 to 1524.4 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	67	SF	$120	$8,040
65993	1526.9 to 1527.9 feet	Vertical Change	1.63"	10 ft	10	REF		
66104	1527.3 to 1541.0 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	137	SF	$120	$16,440
65994	1531.5 to 1532.5 feet	Vertical Change	2.14"	10 ft	10	REF		
66105	1541.3 to 1547.1 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	58	SF	$120	$6,960
66106	1550.8 to 1560.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	100	SF	$120	$12,000
66107	1563.4 to 1571.5 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	81	SF	$120	$9,720
65995	1563.6 to 1564.6 feet	Vertical Change	.31"	10 ft	10	REF		
66108	1572.1 to 1582.6 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	105	SF	$120	$12,600
66109	1584.7 to 1593.3 feet	Cross Slope (PAR)	3.0-4.0%	10 ft	86	SF	$120	$10,320
66110	1593.3 to 1616.8 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	235	SF	$120	$28,200
66111	1619.1 to 1636.5 feet	Cross Slope (PAR)	2.0-3.0%	10 ft	174	SF	$120	$20,880

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **GLADE AVE** **$1,299,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140807	W CLEVELAND AVE	GRANADA DR	27 EAST LOOP	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63598	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
63599	5.8 to 10.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
63600	14.5 to 15.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
63601	18.0 to 25.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
63602	28.0 to 33.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,180**
63603	33.3 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
63604	51.3 to 70.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,340**
63595	60.6 to 61.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
63605	73.5 to 80.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
63606	81.5 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
63607	108.8 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
63608	112.3 to 118.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	30	SF	$120	**$3,540**
63609	118.5 to 123.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
63610	123.6 to 142.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,340**
63611	143.4 to 147.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
63612	151.7 to 153.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
63613	154.3 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,700**
63614	171.3 to 191.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
63615	200.2 to 208.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
63616	211.1 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
63617	216.2 to 223.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
63618	225.3 to 236.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
63619	236.8 to 252.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
63620	253.8 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
63621	262.9 to 271.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	42	SF	$120	**$5,040**
63622	272.4 to 285.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	63	SF	$120	**$7,560**
63623	287.2 to 292.8 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	28	SF	$120	**$3,360**
63624	293.4 to 297.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140807	W CLEVELAND AVE	GRANADA DR	27 EAST LOOP	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63625	298.1 to 302.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
63626	305.5 to 307.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
63627	308.2 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
63628	321.1 to 323.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
63629	324.2 to 329.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	29	SF	$120	**$3,420**
63630	330.7 to 339.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,460**
63631	343.3 to 360.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	86	SF	$120	**$10,320**
63596	344.4 to 345.4 feet	**Vertical Change**	.44"	5 ft	5	REF		
63632	360.5 to 365.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
63633	365.0 to 370.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
63634	373.6 to 380.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
63635	382.3 to 386.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,220**
63636	388.6 to 391.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
63637	392.8 to 403.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
63638	404.8 to 421.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**
63639	421.6 to 424.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
63640	427.4 to 428.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
63641	430.1 to 437.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
63642	440.2 to 441.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
63643	443.8 to 447.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
63644	453.2 to 454.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
63645	467.3 to 475.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
63646	475.6 to 488.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$7,980**
63647	492.8 to 494.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
63648	496.8 to 521.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	121	SF	$120	**$14,520**
63649	521.2 to 526.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,940**
63650	527.3 to 529.0 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	9	SF	$120	**$1,020**
63663	529.0 to 547.0 feet	Key Note Segment		5 ft	90			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109140807	W CLEVELAND AVE	GRANADA DR	27 EAST LOOP	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
63651	547.2 to 549.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$420
63652	551.7 to 553.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	$960
63653	554.2 to 565.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	55	SF	$120	$6,660
63654	566.1 to 592.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	132	SF	$120	$15,840
63655	592.5 to 594.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$960
63656	598.0 to 615.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	89	SF	$120	$10,680
63657	619.3 to 628.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	$5,280
63658	628.1 to 633.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	$3,360
63659	635.8 to 648.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	$7,500
63660	648.3 to 649.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
63661	650.3 to 659.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
63597	658.0 to 659.0 feet	Vertical Change	.94"	5 ft	5	REF		
63662	662.1 to 664.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,620

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **GRANADA DR** **$304,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202041222	W CLEVELAND AVE	N GATEWAY DR	CURB RAMP	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
121339	0.0 to 3.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	27	SF	$120	**$3,192**
121340	4.4 to 13.2 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	62	SF	$120	**$7,392**
121341	15.7 to 25.9 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	71	SF	$120	**$8,568**
121342	28.3 to 81.1 feet	Cross Slope (PAR)	3.0-4.0%	7 ft	370	SF	$120	**$44,352**
121343	81.1 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	235	SF	$120	**$28,224**
121338	108.2 to 109.2 feet	**Vertical Change**	.95"	7 ft	7	REF		
121344	119.3 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	95	SF	$120	**$11,340**
121345	133.1 to 156.3 feet	Cross Slope (PAR)	4.0-5.0%	7 ft	162	SF	$120	**$19,488**
121346	157.2 to 158.3 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	8	SF	$120	**$924**
121348	159.1 to 160.1 feet		5.0-6.0%	7 ft	7			
121349	160.1 to 162.0 feet		6.0-7.0%	7 ft	13			
121347	160.6 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	7 ft	16	SF	$120	**$1,932**

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **N GATEWAY DR** **$125,412.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109141004	W CLEVELAND AVE	N SCHNOOR AVE	1844 W CLEVELAND AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64904	0.0 to 1.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
64901	2.0 to 3.0 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
64905	23.0 to 24.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
64906	41.3 to 57.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
64907	60.5 to 61.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
64908	63.1 to 69.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
64909	71.8 to 89.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	89	SF	$120	**$10,620**
64910	89.9 to 108.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$10,980**
64911	113.2 to 117.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
64912	119.7 to 143.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	120	SF	$120	**$14,400**
64903	143.7 to 144.7 feet	**Vertical Change**	.36"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **N SCHNOOR AVE** **$54,795.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202041510	W CLEVELAND AVE	N SCHNOOR AVE	2290 AVE 15 1/2	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
122056	0.0 to 45.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	229	SF	$120	**$27,420**
122057	47.5 to 61.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,460**
122060	65.1 to 66.1 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
122058	65.4 to 82.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$10,020**
122055	79.8 to 80.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
122059	83.1 to 103.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	103	SF	$120	**$12,300**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **N SCHNOOR AVE** **$58,299.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150740	W CLEVELAND AVE	N WESTBERRY BLV	GLADE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65911	0.0 to 9.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
65912	9.8 to 15.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,300**
65913	17.8 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
65914	28.6 to 30.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
65915	31.8 to 32.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
65906	55.1 to 56.1 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
65916	66.6 to 68.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
65917	82.2 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
65918	112.5 to 129.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
65919	129.7 to 162.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	165	SF	$120	**$19,800**
65920	165.3 to 183.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$10,980**
65907	170.4 to 171.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
65921	183.6 to 186.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
65922	188.6 to 206.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	91	SF	$120	**$10,920**
65923	208.3 to 212.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
65908	210.1 to 211.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
65924	218.3 to 223.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
65925	226.0 to 243.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
65926	243.7 to 244.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
65927	262.7 to 275.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
65909	282.9 to 283.9 feet	**Vertical Change**	1.27"	5 ft	5	SF	$75	**$375**
65928	288.8 to 289.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
65929	294.9 to 301.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
65930	310.9 to 314.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
65931	323.8 to 328.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
65932	331.3 to 333.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
65933	334.1 to 337.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
65934	340.3 to 341.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109150740	W CLEVELAND AVE	N WESTBERRY BLV	GLADE AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
65935	343.9 to 347.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
65936	347.8 to 351.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
65937	354.3 to 358.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
65938	361.8 to 380.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	96	SF	$120	**$11,460**
65939	383.6 to 388.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
65940	388.8 to 393.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
65910	398.5 to 399.5 feet	**Vertical Change**	-.57"	5 ft	5	SF	$75	**$375**
65941	404.8 to 406.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
65942	419.5 to 432.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
65943	444.5 to 450.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
65944	450.4 to 453.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
65945	452.0 to 453.6 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **N WESTBERRY BLV** **$150,345.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2109141000	W CLEVELAND AVE	STEPHANIE LN	PARKING LOT ENTRANCE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
64848	1.3 to 15.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
64843	19.1 to 20.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
64849	22.5 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
64850	35.5 to 38.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
64844	35.6 to 36.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
64851	39.0 to 47.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
64852	47.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
64846	76.4 to 77.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
64853	87.5 to 90.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
64854	92.4 to 93.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
64847	93.1 to 94.1 feet	**Vertical Change**	.66"	5 ft	5	REF		
64855	96.5 to 107.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
64856	118.9 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**

TOTAL COST FOR: S *side of* **W CLEVELAND AVE** *Starting at:* **STEPHANIE LN** **$30,390.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2109150805	W CLEVELAND AVE	SUNDANCE LN	FOXGLOVE WAY	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
66260	0.0 to 2.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
66261	4.4 to 5.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
66262	6.8 to 11.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
66263	11.8 to 17.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
66264	17.9 to 28.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	51	SF	$120	**$6,060**
66259	27.9 to 28.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
66265	32.3 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
66266	39.2 to 40.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
66267	54.0 to 56.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
66268	61.4 to 62.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
66269	65.0 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
66270	71.8 to 73.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**
66271	74.2 to 78.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
66272	78.4 to 81.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
66273	79.3 to 81.0 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: N *side of* **W CLEVELAND AVE** *Starting at:* **SUNDANCE LN** **$30,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111748	W KENNEDY ST	2140 W KENNEDY ST	2140 W KENNEDY ST	23

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
134481	0.6 to 4.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: S *side of* **W KENNEDY ST** *Starting at:* **2140 W KENNEDY ST** **$2,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121608	W PARK DR	2427 LAUREL ST	2411 LAUREL ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97396	9.3 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
97397	11.8 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
97390	28.1 to 29.1 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
97398	40.5 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
97405	44.8 to 66.8 feet	Key Note Segment		5 ft	110			
97391	45.7 to 46.7 feet	**Vertical Change**	-.36"	5 ft	5	REF		
97392	48.9 to 49.9 feet	**Vertical Change**	.39"	5 ft	5	REF		
97393	56.0 to 57.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
97399	67.6 to 76.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
97400	80.5 to 87.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
97406	87.8 to 109.7 feet	Key Note Segment		5 ft	110			
97401	109.7 to 123.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	71	SF	$40	**$2,820**
97402	124.1 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
97394	132.3 to 133.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
97403	133.0 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
97407	144.2 to 164.4 feet	Key Note Segment		5 ft	101			
97404	165.1 to 168.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
97395	165.7 to 166.7 feet	**Vertical Change**	.32"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W PARK DR** *Starting at:* **2427 LAUREL ST** **$33,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121558	W PARK DR	2434 W PARK DR	2436 W PARK DR	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97321	0.0 to 8.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
97318	3.0 to 4.0 feet	**Vertical Change**	.47"	5 ft	5	REF		
97322	12.3 to 20.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
97324	22.1 to 43.8 feet	Key Note Segment		5 ft	109			
97319	23.2 to 24.2 feet	**Vertical Change**	1.17"	5 ft	5	REF		
97323	44.5 to 56.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	62	SF	$40	**$2,460**
97320	51.1 to 52.1 feet	**Vertical Change**	-.37"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W PARK DR** *Starting at:* **2434 W PARK DR** **$12,540.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121255	W PARK DR	803 ROYAL DR	ROYAL DR	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95370	0.0 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
95371	12.8 to 24.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
95372	27.8 to 39.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,900**
95369	37.0 to 38.0 feet	**Vertical Change**	1.47"	5 ft	5	REF		
95373	39.3 to 54.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	78	SF	$120	**$9,300**
95374	55.3 to 56.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
95375	56.9 to 60.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
95376	60.8 to 62.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
95379	62.1 to 63.4 feet		5.0-6.0%	5 ft	7			
95377	64.7 to 69.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
95380	71.5 to 72.7 feet		5.0-6.0%	5 ft	6			
95378	72.8 to 76.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
95381	73.9 to 75.8 feet		8.0-9.0%	5 ft	9			

TOTAL COST FOR: N *side of* **W PARK DR** *Starting at:* **803 ROYAL DR** **$39,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121556	W PARK DR	LINDEN ST	779 W PARK DR	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
97311	0.7 to 29.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	146	SF	$120	**$17,460**
97310	0.8 to 1.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
97312	30.8 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
97313	38.4 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
97314	45.8 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,500**
97315	59.3 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
97317	63.8 to 65.7 feet		5.0-6.0%	5 ft	10			
97316	66.2 to 67.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**

TOTAL COST FOR: S *side of* **W PARK DR** *Starting at:* **LINDEN ST** **$35,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121252	W PARK DR	MAINBERRY DR	N SCHNOOR AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95280	0.0 to 11.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
95281	11.5 to 26.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,820**
95348	26.2 to 45.3 feet	Key Note Segment		5 ft	96			
95282	47.5 to 54.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
95252	52.6 to 53.6 feet	**Vertical Change**	.33"	5 ft	5	REF		
95349	56.2 to 77.6 feet	Key Note Segment		5 ft	107			
95283	79.0 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
95253	79.9 to 80.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
95284	85.2 to 100.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,000**
95254	103.6 to 104.6 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
95285	111.1 to 115.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,880**
95255	114.2 to 115.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
95350	115.9 to 135.8 feet	Key Note Segment		5 ft	100			
95286	137.9 to 148.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
95287	148.3 to 151.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
95288	154.8 to 163.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
95289	163.3 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
95351	169.9 to 190.2 feet	Key Note Segment		5 ft	102			
95290	193.8 to 229.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	178	SF	$120	**$21,360**
95291	230.3 to 232.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
95352	235.6 to 265.3 feet	Key Note Segment		5 ft	149			
95256	255.4 to 256.4 feet	**Vertical Change**	.49"	5 ft	5	REF		
95292	265.8 to 266.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
95293	269.3 to 271.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
95294	273.7 to 274.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
95295	275.6 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,460**
95353	279.7 to 300.6 feet	Key Note Segment		5 ft	105			
95296	302.1 to 305.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121252	W PARK DR	MAINBERRY DR	N SCHNOOR AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95297	306.5 to 308.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
95298	311.0 to 316.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,360**
95299	316.6 to 329.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,740**
95300	333.3 to 336.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
95354	336.0 to 355.8 feet	Key Note Segment		5 ft	99			
95257	354.1 to 355.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
95301	355.8 to 357.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$260**
95302	357.3 to 362.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
95258	358.7 to 359.7 feet	**Vertical Change**	-.33"	5 ft	5	REF		
95303	362.2 to 391.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	147	SF	$120	**$17,580**
95259	390.6 to 391.6 feet	**Vertical Change**	-.29"	5 ft	5	REF		
95355	391.5 to 421.3 feet	Key Note Segment		5 ft	149			
95260	411.1 to 412.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
95261	421.8 to 422.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
95304	422.3 to 423.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
95305	423.5 to 437.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
95306	443.0 to 455.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
95262	443.6 to 444.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
95356	455.1 to 474.4 feet	Key Note Segment		5 ft	97			
95263	465.6 to 466.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
95307	476.3 to 490.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,400**
95264	477.8 to 478.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
95308	492.7 to 495.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
95309	498.8 to 508.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
95310	511.6 to 535.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	117	SF	$120	**$14,040**
95311	535.0 to 537.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
95357	537.0 to 556.6 feet	Key Note Segment		5 ft	98			
95265	547.4 to 548.4 feet	**Vertical Change**	.28"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121252	W PARK DR	MAINBERRY DR	N SCHNOOR AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95312	557.7 to 559.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
95313	561.5 to 563.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
95314	563.9 to 573.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,940**
95315	576.7 to 583.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
95316	583.3 to 595.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
95266	587.9 to 588.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
95358	595.4 to 615.2 feet	Key Note Segment		5 ft	99			
95317	615.8 to 631.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	**$9,300**
95318	632.0 to 664.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
95319	666.5 to 670.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
95267	668.8 to 669.8 feet	**Vertical Change**	1.06"	5 ft	5	REF		
95359	670.8 to 690.8 feet	Key Note Segment		5 ft	100			
95268	681.0 to 682.0 feet	**Vertical Change**	-.32"	5 ft	5	REF		
95320	691.6 to 696.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
95269	692.9 to 693.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
95321	698.1 to 700.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
95270	699.3 to 700.3 feet	**Vertical Change**	-.33"	5 ft	5	REF		
95322	704.4 to 708.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
95271	705.6 to 706.6 feet	**Vertical Change**	-.51"	5 ft	5	REF		
95360	708.0 to 727.1 feet	Key Note Segment		5 ft	96			
95323	729.9 to 733.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
95324	733.2 to 739.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
95325	741.6 to 761.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
95361	761.4 to 781.9 feet	Key Note Segment		5 ft	103			
95326	783.6 to 791.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
95327	791.0 to 799.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	43	SF	$120	**$5,100**
95328	799.5 to 808.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
95329	808.8 to 811.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121252	W PARK DR	MAINBERRY DR	N SCHNOOR AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95272	811.2 to 812.2 feet	Vertical Change	-.35"	5 ft	5	REF		
95330	815.6 to 817.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$840
95273	816.3 to 817.3 feet	Vertical Change	-.39"	5 ft	5	REF		
95331	817.2 to 818.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
95362	818.5 to 838.1 feet	Key Note Segment		5 ft	98			
95332	839.0 to 846.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,740
95333	849.5 to 851.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
95334	852.3 to 871.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,700
95363	871.8 to 892.1 feet	Key Note Segment		5 ft	102			
95335	893.3 to 896.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
95336	899.7 to 908.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	$5,520
95274	901.7 to 902.7 feet	Vertical Change	.39"	5 ft	5	REF		
95337	908.9 to 920.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,140
95364	925.4 to 946.2 feet	Key Note Segment		5 ft	104			
95338	947.6 to 964.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	$10,320
95275	951.7 to 952.7 feet	Vertical Change	-.26"	5 ft	5	REF		
95339	967.5 to 978.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	$6,780
95340	979.6 to 981.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
95365	981.0 to 1009.3 feet	Key Note Segment		5 ft	142			
95341	1009.7 to 1026.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	84	SF	$120	$10,020
95277	1012.1 to 1013.1 feet	Vertical Change	.36"	5 ft	5	REF		
95342	1026.4 to 1036.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
95278	1026.9 to 1030.8 feet	Vertical Change	-.5"	5 ft	19	REF		
95343	1040.4 to 1048.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	$4,920
95279	1042.8 to 1043.8 feet	Vertical Change	.28"	5 ft	5	REF		
95344	1048.6 to 1050.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	$900
95345	1050.3 to 1055.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,120
95366	1056.5 to 1076.2 feet	Key Note Segment		5 ft	99			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2201121252	W PARK DR	MAINBERRY DR	N SCHNOOR AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95368	1076.8 to 1077.9 feet		5.0-6.0%	5 ft	6			
95346	1078.4 to 1081.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,620**
95367	1082.6 to 1094.8 feet	Key Note Segment		5 ft	61			
95347	1096.5 to 1099.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: S *side of* **W PARK DR** *Starting at:* **MAINBERRY DR** **$334,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121329	W PARK DR	ROYAL DR	SHANNON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95731	0.0 to 3.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$2,040**
95732	4.6 to 23.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	94	SF	$120	**$11,220**
95733	27.3 to 40.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,920**
95722	36.3 to 37.3 feet	**Vertical Change**	2.91"	5 ft	5	REF		
95734	40.8 to 49.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,340**
95735	49.8 to 66.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,140**
95736	69.9 to 75.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
95737	77.2 to 90.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
95723	90.1 to 91.1 feet	**Vertical Change**	-.45"	5 ft	5	REF		
95760	91.6 to 111.6 feet	Key Note Segment		5 ft	100			
95738	113.9 to 120.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
95739	123.5 to 129.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
95724	123.7 to 124.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
95740	130.1 to 133.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
95725	137.0 to 138.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
95741	137.4 to 140.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
95726	142.2 to 143.2 feet	**Vertical Change**	.83"	5 ft	5	SF	$75	**$375**
95742	144.8 to 152.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
95743	152.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
95744	162.7 to 166.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
95745	166.6 to 169.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
95761	169.4 to 189.1 feet	Key Note Segment		5 ft	99			
95746	191.0 to 209.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	92	SF	$120	**$10,980**
95762	209.3 to 240.5 feet	Key Note Segment		5 ft	156			
95727	230.9 to 231.9 feet	**Vertical Change**	.28"	5 ft	5	REF		
95747	245.8 to 250.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
95748	252.3 to 255.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
95749	264.6 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121329	W PARK DR	ROYAL DR	SHANNON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
95728	270.5 to 271.5 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
95750	272.0 to 279.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	$4,380
95763	280.2 to 309.0 feet	Key Note Segment		5 ft	144			
95751	311.8 to 315.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,220
95752	316.3 to 317.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
95753	321.6 to 326.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	$2,700
95754	326.8 to 328.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
95755	333.7 to 340.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
95764	341.4 to 362.2 feet	Key Note Segment		5 ft	104			
95729	354.6 to 355.6 feet	Vertical Change	.36"	5 ft	5	REF		
95756	362.5 to 371.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	47	SF	$40	$1,880
95730	370.8 to 371.8 feet	Vertical Change	-.26"	5 ft	5	REF		
95757	374.4 to 375.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	$780
95758	380.7 to 381.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
95759	385.8 to 390.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,060

TOTAL COST FOR: N *side of* **W PARK DR** *Starting at:* **ROYAL DR** **$113,810.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121424	W PARK DR	SHANNON AVE	MAINBERRY DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96364	0.0 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
96365	6.8 to 13.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
96392	13.3 to 33.7 feet	Key Note Segment		5 ft	102			
96366	35.3 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
96367	46.8 to 56.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**
96368	58.3 to 61.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
96369	61.3 to 70.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
96393	73.0 to 92.1 feet	Key Note Segment		5 ft	96			
96370	95.3 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
96371	101.2 to 103.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
96394	103.4 to 123.4 feet	Key Note Segment		5 ft	100			
96354	113.9 to 114.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
96372	124.7 to 152.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	138	SF	$120	**$16,560**
96355	135.6 to 136.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
96373	152.6 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
96356	156.1 to 157.1 feet	**Vertical Change**	.59"	5 ft	5	REF		
96395	158.1 to 177.5 feet	Key Note Segment		5 ft	97			
96374	178.2 to 179.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	6	SF	$40	**$240**
96375	182.5 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
96357	183.1 to 184.1 feet	**Vertical Change**	1.17"	5 ft	5	REF		
96376	185.5 to 195.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
96358	190.5 to 191.5 feet	**Vertical Change**	3.19"	5 ft	5	REF		
96377	195.8 to 199.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
96378	199.7 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
96396	211.9 to 231.4 feet	Key Note Segment		5 ft	98			
96379	232.5 to 243.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
96359	243.4 to 244.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
96380	244.8 to 264.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2201121424	W PARK DR	SHANNON AVE	MAINBERRY DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
96397	265.6 to 285.8 feet	Key Note Segment		5 ft	101			
96360	275.9 to 276.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
96381	286.3 to 287.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$260**
96382	291.0 to 292.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
96383	293.5 to 309.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
96384	314.2 to 326.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
96385	328.9 to 336.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
96361	331.3 to 332.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
96386	337.2 to 342.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
96398	342.3 to 363.0 feet	Key Note Segment		5 ft	104			
96387	365.5 to 367.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
96388	372.3 to 394.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
96399	396.1 to 416.1 feet	Key Note Segment		5 ft	100			
96389	418.7 to 428.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
96400	428.9 to 449.1 feet	Key Note Segment		5 ft	101			
96390	451.8 to 459.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
96362	460.6 to 461.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
96391	460.7 to 473.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
96363	473.8 to 474.8 feet	**Vertical Change**	.34"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W PARK DR** *Starting at:* **SHANNON AVE** **$144,260.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201104	W ROBERTS AVE	701 N H ST	N H ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40510	0.0 to 60.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	302	SF	$120	**$36,180**
40508	24.2 to 25.2 feet	**Vertical Change**	-.32"	5 ft	5	REF		
40509	35.0 to 36.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
40511	63.8 to 85.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,080**
40512	89.2 to 95.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
40513	95.5 to 121.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	128	SF	$120	**$15,360**

TOTAL COST FOR: SE *side of* **W ROBERTS AVE** *Starting at:* **701 N H ST** **$68,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105201045	W ROBERTS AVE	N G ST	N GATEWAY DR	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40446	0.0 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
40447	14.5 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
40455	21.3 to 41.3 feet	Key Note Segment		5 ft	100			
40438	21.5 to 22.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
40448	41.3 to 42.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	7	SF	$40	**$260**
40456	67.5 to 87.0 feet	Key Note Segment		5 ft	98			
40439	73.2 to 74.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
40440	97.9 to 98.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
40441	109.5 to 110.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
40457	119.6 to 139.1 feet	Key Note Segment		5 ft	98			
40449	139.9 to 148.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,100**
40450	151.0 to 160.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	49	SF	$120	**$5,880**
40451	161.3 to 171.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	48	SF	$120	**$5,820**
40458	171.0 to 244.1 feet	Key Note Segment		5 ft	366			
40443	228.6 to 229.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
40444	232.9 to 233.9 feet	**Vertical Change**	.32"	5 ft	5	REF		
40445	236.9 to 237.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
40452	244.8 to 257.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	63	SF	$120	**$7,500**
40453	259.8 to 270.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
40454	270.1 to 271.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: SE *side of* **W ROBERTS AVE** *Starting at:* **N G ST** **$37,970.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105201049	W ROBERTS AVE	N GATEWAY DR	N G ST	39

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
40461	5.2 to 14.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
40462	17.0 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
40477	20.7 to 50.8 feet	Key Note Segment		5 ft	151			
40463	52.3 to 78.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	132	SF	$120	**$15,840**
40459	70.7 to 71.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
40460	77.0 to 80.1 feet	**Vertical Change**	.43"	5 ft	15	REF		
40464	81.3 to 83.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
40465	85.6 to 115.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	150	SF	$120	**$17,940**
40466	116.2 to 123.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
40478	123.4 to 151.9 feet	Key Note Segment		5 ft	143			
40467	155.3 to 157.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
40468	158.2 to 168.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
40469	171.9 to 185.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	70	SF	$120	**$8,340**
40470	188.1 to 195.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
40471	195.9 to 229.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
40472	230.3 to 234.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
40473	234.3 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
40474	240.5 to 265.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,880**
40475	265.3 to 270.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
40476	270.9 to 276.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: NW *side of* **W ROBERTS AVE** *Starting at:* **N GATEWAY DR** **$113,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2105181008	W ROBERTS AVE	N I ST	720 N I ST	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36847	0.8 to 2.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
36848	2.9 to 16.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
36844	10.1 to 11.1 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
36845	19.0 to 20.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
36849	43.0 to 47.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
36850	78.6 to 82.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
36851	99.8 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
36846	103.0 to 104.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W ROBERTS AVE** *Starting at:* **N I ST** **$17,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091436	W SHERWOOD WAY	111 W SHERWOOD WAY	111 W SHERWOOD WAY	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54731	0.3 to 10.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
54732	12.7 to 35.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	116	SF	$120	**$13,920**
54733	38.8 to 41.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
54734	41.8 to 53.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
54735	63.9 to 80.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
54736	90.8 to 139.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	245	SF	$120	**$29,400**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **111 W SHERWOOD WAY** **$67,680.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071413	W SHERWOOD WAY	1226 W SHERWOOD WAY	MERCED ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43866	1.1 to 13.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	49	SF	$120	**$5,856**
43867	29.5 to 38.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
43868	42.0 to 76.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	138	SF	$120	**$16,608**
43865	60.8 to 61.8 feet	**Vertical Change**	.31"	4 ft	4	REF		
43869	78.2 to 82.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
43870	84.2 to 101.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	69	SF	$120	**$8,256**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **1226 W SHERWOOD WAY** **$36,864.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091439	W SHERWOOD WAY	1305 COUNTRY CLUB DR	COUNTRY CLUB DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54743	0.8 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
54744	22.5 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
54737	28.9 to 29.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
54738	36.8 to 37.8 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
54748	38.8 to 39.8 feet		5.0-6.0%	5 ft	5			
54739	42.0 to 43.0 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
54745	45.3 to 84.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	196	SF	$120	**$23,460**
54740	51.1 to 52.1 feet	**Vertical Change**	2.97"	5 ft	5	REF		
54741	86.4 to 87.4 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
54746	99.3 to 102.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
54747	105.2 to 124.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
54742	105.5 to 106.5 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **1305 COUNTRY CLUB DR** **$55,605.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091424	W SHERWOOD WAY	205 SHERWOOD WAY	SONORA ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54692	0.0 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
54693	3.2 to 4.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
54707	4.3 to 27.3 feet	Key Note Segment		4 ft	92			
54694	27.6 to 32.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,112**
54695	33.0 to 47.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$6,912**
54696	50.6 to 54.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,776**
54697	56.8 to 64.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	30	SF	$120	**$3,600**
54708	65.7 to 85.3 feet	Key Note Segment		4 ft	78			
54698	85.3 to 87.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	9	SF	$40	**$368**
54699	88.2 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
54690	88.4 to 89.4 feet	**Vertical Change**	-.26"	4 ft	4	REF		
54700	95.6 to 99.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
54701	100.2 to 105.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
54702	105.4 to 108.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	**$1,536**
54691	115.9 to 116.9 feet	**Vertical Change**	-.49"	4 ft	4	REF		
54703	115.9 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	166	SF	$120	**$19,872**
54704	160.1 to 189.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	118	SF	$120	**$14,160**
54705	189.6 to 192.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	10	SF	$120	**$1,200**
54706	194.8 to 198.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	15	SF	$120	**$1,824**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **205 SHERWOOD WAY** **$62,096.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091434	W SHERWOOD WAY	338 W SHERWOOD WAY	111 W SHERWOOD WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54709	8.2 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
54710	33.4 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
54711	48.5 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
54712	75.8 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
54713	95.4 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
54714	109.6 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
54715	121.9 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
54716	136.2 to 138.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
54730	138.5 to 165.8 feet	Key Note Segment		5 ft	137			
54717	165.8 to 183.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	87	SF	$40	**$3,480**
54718	187.0 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
54719	213.7 to 222.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
54720	232.6 to 254.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	110	SF	$120	**$13,140**
54721	268.0 to 269.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
54722	286.0 to 294.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,340**
54723	297.2 to 300.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
54724	303.4 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
54725	313.9 to 318.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
54726	320.9 to 331.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
54727	336.4 to 345.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
54728	349.4 to 355.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
54729	357.3 to 372.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **338 W SHERWOOD WAY** **$113,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021124	W SHERWOOD WAY	901 W SHERWOOD WAY	N LAKE ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117689	4.0 to 9.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
117688	7.3 to 8.3 feet	**Vertical Change**	.3"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **901 W SHERWOOD WAY** **$3,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021036	W SHERWOOD WAY	AUSTIN AVE	DELLAVALLE AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117378	0.0 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
117372	2.6 to 3.6 feet	**Vertical Change**	.55"	5 ft	5	REF		
117379	6.7 to 12.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
117373	8.0 to 9.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
117380	15.0 to 17.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
117381	18.1 to 40.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
117374	42.1 to 43.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
117382	43.1 to 51.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
117383	54.3 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
117384	70.0 to 72.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
117385	74.6 to 81.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
117386	82.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
117387	89.5 to 91.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
117375	100.4 to 101.4 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
117388	104.2 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117395	108.2 to 122.1 feet	Key Note Segment		5 ft	70			
117389	151.4 to 153.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117390	169.7 to 173.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
117396	173.8 to 182.6 feet	Key Note Segment		5 ft	44			
117376	183.3 to 184.3 feet	**Vertical Change**	.49"	5 ft	5	REF		
117391	186.6 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
117392	196.4 to 221.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,240**
117393	221.8 to 226.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
117377	222.7 to 223.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
117394	228.3 to 232.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **AUSTIN AVE** **$73,875.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021429	W SHERWOOD WAY	AUSTIN AVE	N LAKE ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118757	0.3 to 59.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	238	SF	$120	**$28,560**
118749	21.8 to 22.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
118750	38.2 to 39.2 feet	**Vertical Change**	.35"	4 ft	4	REF		
118758	62.2 to 104.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	170	SF	$120	**$20,352**
118759	106.8 to 110.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	13	SF	$120	**$1,536**
118760	110.0 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
118761	166.9 to 168.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
118762	176.3 to 191.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
118763	199.7 to 206.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,264**
118764	215.6 to 231.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
118765	233.8 to 235.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
118766	244.9 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	114	SF	$120	**$13,632**
118767	277.4 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	78	SF	$120	**$9,360**
118768	299.3 to 301.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
118751	306.4 to 307.4 feet	**Vertical Change**	-.47"	4 ft	4	REF		
118769	307.0 to 309.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
118770	326.9 to 334.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,792**
118771	344.9 to 368.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	93	SF	$120	**$11,184**
118772	370.3 to 371.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
118773	372.2 to 380.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
118774	386.7 to 423.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	148	SF	$120	**$17,808**
118775	436.6 to 440.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
118776	443.3 to 467.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	98	SF	$120	**$11,760**
118752	466.2 to 467.2 feet	**Vertical Change**	2.42"	4 ft	4	REF		
118777	471.2 to 507.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	144	SF	$120	**$17,280**
118778	507.8 to 510.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,344**
118779	512.7 to 536.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	95	SF	$120	**$11,424**
118780	536.8 to 539.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	**$1,392**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021429	W SHERWOOD WAY	AUSTIN AVE	N LAKE ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118781	540.7 to 544.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
118782	547.9 to 551.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
118783	551.4 to 593.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	169	SF	$120	**$20,256**
118753	573.9 to 574.9 feet	**Vertical Change**	.42"	4 ft	4	REF		
118754	578.8 to 579.8 feet	**Vertical Change**	.49"	4 ft	4	REF		
118784	596.4 to 619.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	91	SF	$120	**$10,896**
118785	621.9 to 634.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,000**
118786	636.9 to 640.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,488**
118787	644.6 to 655.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	44	SF	$120	**$5,328**
118788	658.8 to 671.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,192**
118789	676.5 to 680.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
118755	678.2 to 679.2 feet	**Vertical Change**	.37"	4 ft	4	REF		
118790	683.4 to 687.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**
118791	687.5 to 691.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	17	SF	$120	**$2,064**
118792	695.3 to 696.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
118793	702.1 to 733.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	127	SF	$120	**$15,216**
118756	731.4 to 732.4 feet	**Vertical Change**	2.82"	4 ft	4	REF		
118794	733.8 to 739.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
118795	745.7 to 746.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
118796	750.7 to 753.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
118797	756.4 to 762.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
118798	764.0 to 780.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	66	SF	$120	**$7,968**
118799	780.8 to 784.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **AUSTIN AVE** **$271,344.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091503	W SHERWOOD WAY	COUNTRY CLUB DR	SHERWOOD POINTE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54852	1.2 to 2.2 feet	Vertical Change	-.31"	8 ft	8	LF	$75	$600
54859	5.8 to 13.8 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	64	SF	$120	$7,680
54860	14.1 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	46	SF	$120	$5,472
54861	26.1 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	26	SF	$120	$3,072
54862	33.6 to 36.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	$2,688
54863	36.4 to 41.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	38	SF	$120	$4,512
54864	41.3 to 54.5 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	106	SF	$120	$12,672
54865	61.0 to 63.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	17	SF	$120	$2,016
54866	65.2 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	33	SF	$120	$3,936
54867	76.0 to 102.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	208	SF	$120	$24,960
54868	104.7 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	25	SF	$120	$2,976
54853	109.4 to 110.4 feet	Vertical Change	.47"	8 ft	8	LF	$75	$600
54869	113.1 to 116.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	30	SF	$120	$3,648
54870	119.7 to 133.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	107	SF	$120	$12,864
54902	134.1 to 166.2 feet	Key Note Segment		8 ft	257			
54871	166.2 to 167.3 feet	Cross Slope (Driveway)	3.0-4.0%	8 ft	9	SF	$40	$352
54872	168.3 to 196.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	228	SF	$120	$27,360
54873	201.1 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	71	SF	$120	$8,544
54874	213.0 to 253.0 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	320	SF	$120	$38,400
54854	236.7 to 237.7 feet	Vertical Change	.41"	8 ft	8	REF		
54875	255.4 to 258.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	23	SF	$120	$2,784
54876	258.3 to 263.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	41	SF	$120	$4,896
54877	263.4 to 283.3 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	159	SF	$120	$19,104
54856	283.8 to 284.8 feet	Vertical Change	.26"	8 ft	8	LF	$75	$600
54878	285.0 to 301.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	130	SF	$120	$15,648
54857	292.1 to 293.1 feet	Vertical Change	3.14"	8 ft	8	REF		
54879	303.8 to 305.1 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	10	SF	$120	$1,248
54880	307.4 to 316.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	74	SF	$120	$8,832

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091503	W SHERWOOD WAY	COUNTRY CLUB DR	SHERWOOD POINTE	68

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54881	320.3 to 332.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	101	SF	$120	**$12,096**
54882	334.7 to 358.1 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	187	SF	$120	**$22,464**
54883	361.1 to 366.3 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	42	SF	$120	**$4,992**
54884	369.1 to 370.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	14	SF	$120	**$1,632**
54885	373.4 to 381.6 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	66	SF	$120	**$7,872**
54886	381.6 to 383.2 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	13	SF	$120	**$1,536**
54903	383.7 to 417.0 feet	Key Note Segment		8 ft	266			
54887	417.2 to 423.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	8 ft	49	SF	$40	**$1,952**
54888	430.7 to 446.3 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	125	SF	$120	**$14,976**
54889	448.6 to 450.0 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	11	SF	$120	**$1,344**
54890	450.3 to 456.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	46	SF	$120	**$5,568**
54891	458.8 to 463.9 feet	Cross Slope (PAR)	3.0-4.0%	8 ft	41	SF	$120	**$4,896**
54858	461.8 to 462.8 feet	**Vertical Change**	.28"	8 ft	8	REF		
54892	465.2 to 467.9 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	22	SF	$120	**$2,592**
54893	470.5 to 477.7 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	58	SF	$120	**$6,912**
54894	487.2 to 493.4 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	50	SF	$120	**$5,952**
54904	493.4 to 522.8 feet	Key Note Segment		8 ft	235			
54895	523.2 to 525.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	8 ft	21	SF	$40	**$832**
54896	527.5 to 537.8 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	82	SF	$120	**$9,888**
54897	539.1 to 583.8 feet	Cross Slope (PAR)	4.0-5.0%	8 ft	358	SF	$120	**$42,912**
54898	584.0 to 598.1 feet	Cross Slope (PAR)	2.0-3.0%	8 ft	113	SF	$120	**$13,536**
54899	600.3 to 601.3 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	8	SF	$120	**$960**
54900	601.3 to 602.4 feet	Cross Slope (PAR)	6.0-7.0%	8 ft	9	SF	$120	**$1,056**
54901	602.9 to 607.1 feet	Cross Slope (PAR)	5.0-6.0%	8 ft	34	SF	$120	**$4,032**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **COUNTRY CLUB DR** **$383,464.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091314	W SHERWOOD WAY	DAVIS ST	PHILIP ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54179	0.0 to 3.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
54180	3.9 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
54181	21.8 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
54182	42.1 to 49.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
54183	51.4 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
54184	75.4 to 85.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,940**
54185	85.6 to 91.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,240**
54186	92.4 to 94.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
54187	94.9 to 100.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**
54178	101.4 to 102.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
54188	102.3 to 119.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,440**
54189	119.9 to 134.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **DAVIS ST** **$67,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021039	W SHERWOOD WAY	DELLAVALLE AVE	NEBRASKA AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117403	1.5 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
117404	6.9 to 11.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
117405	11.3 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
117397	12.7 to 13.7 feet	**Vertical Change**	.4"	5 ft	5	REF		
117398	27.6 to 28.6 feet	**Vertical Change**	-.27"	5 ft	5	REF		
117406	31.9 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,740**
117407	43.2 to 83.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	199	SF	$120	**$23,880**
117399	65.8 to 66.8 feet	**Vertical Change**	.46"	5 ft	5	REF		
117408	98.3 to 107.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
117416	108.0 to 119.6 feet	Key Note Segment		5 ft	58			
117409	124.3 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
117410	130.9 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
117401	141.8 to 145.0 feet	**Vertical Change**	.29"	5 ft	16	REF		
117411	154.9 to 159.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,580**
117412	160.5 to 165.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
117413	169.8 to 179.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
117414	182.4 to 197.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
117417	197.7 to 210.0 feet	Key Note Segment		5 ft	62			
117402	198.2 to 199.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
117415	216.9 to 225.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **DELLAVALLE AVE** **$87,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021053	W SHERWOOD WAY	DELLAVALLE AVE	AUSTIN AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117508	0.0 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
117509	4.2 to 19.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
117505	16.8 to 17.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
117510	22.5 to 25.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
117506	28.2 to 29.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
117511	34.1 to 37.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
117520	37.4 to 46.8 feet	Key Note Segment		5 ft	47			
117512	51.5 to 61.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
117513	64.5 to 67.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,860**
117514	67.8 to 103.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,660**
117521	107.7 to 122.0 feet	Key Note Segment		5 ft	72			
117515	122.0 to 123.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$320**
117516	125.9 to 163.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	186	SF	$120	**$22,260**
117507	150.9 to 151.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
117517	163.0 to 166.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
117518	170.7 to 171.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
117522	182.3 to 192.8 feet	Key Note Segment		5 ft	53			
117519	215.2 to 232.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **DELLAVALLE AVE** **$79,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091420	W SHERWOOD WAY	N D ST	NICOLA WAY	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54652	0.0 to 10.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,848**
54653	13.5 to 20.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	29	SF	$120	**$3,456**
54654	25.8 to 28.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	12	SF	$120	**$1,392**
54668	31.6 to 50.3 feet	Key Note Segment		4 ft	75			
54655	52.6 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	61	SF	$120	**$7,296**
54656	68.4 to 84.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	64	SF	$120	**$7,680**
54647	83.1 to 84.1 feet	**Vertical Change**	-.29"	4 ft	4	REF		
54669	84.4 to 101.9 feet	Key Note Segment		4 ft	70			
54648	103.5 to 104.5 feet	**Vertical Change**	1.39"	4 ft	4	SF	$75	**$300**
54670	110.2 to 129.1 feet	Key Note Segment		4 ft	76			
54649	127.6 to 128.6 feet	**Vertical Change**	.42"	4 ft	4	REF		
54657	129.4 to 133.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	18	SF	$40	**$704**
54658	137.4 to 147.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	40	SF	$120	**$4,752**
54659	147.3 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
54660	158.4 to 188.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	119	SF	$120	**$14,304**
54671	188.2 to 208.3 feet	Key Note Segment		4 ft	80			
54661	208.8 to 210.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$576**
54662	210.0 to 216.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
54672	216.7 to 235.6 feet	Key Note Segment		4 ft	76			
54663	238.4 to 242.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	18	SF	$120	**$2,112**
54651	241.4 to 242.4 feet	**Vertical Change**	-.44"	4 ft	4	REF		
54664	243.4 to 264.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,032**
54665	272.6 to 276.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
54666	281.5 to 295.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
54673	296.3 to 314.3 feet	Key Note Segment		4 ft	72			
54674	322.3 to 339.9 feet	Key Note Segment		4 ft	70			
54667	363.4 to 366.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **N D ST** **$76,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021044	W SHERWOOD WAY	N D ST	NEBRASKA AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117444	12.1 to 13.1 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
117452	14.4 to 24.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
117453	25.1 to 33.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	$5,040
117445	33.6 to 34.6 feet	Vertical Change	.32"	5 ft	5	LF	$75	$375
117454	41.6 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,680
117446	57.6 to 58.6 feet	Vertical Change	.39"	5 ft	5	LF	$75	$375
117455	63.8 to 70.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,960
117447	72.4 to 73.4 feet	Vertical Change	.34"	5 ft	5	LF	$75	$375
117456	73.5 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$780
117457	77.3 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
117458	85.8 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,020
117464	91.0 to 100.6 feet	Key Note Segment		5 ft	48			
117465	106.5 to 123.7 feet	Key Note Segment		5 ft	86			
117459	125.7 to 154.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	142	SF	$120	$17,040
117448	152.3 to 153.3 feet	Vertical Change	-.27"	5 ft	5	REF		
117460	158.4 to 192.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	172	SF	$120	$20,640
117450	182.6 to 183.6 feet	Vertical Change	.32"	5 ft	5	REF		
117461	197.4 to 199.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	$1,260
117462	199.5 to 208.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,100
117463	210.4 to 225.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	$9,060
117451	220.1 to 221.1 feet	Vertical Change	.45"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **N D ST** **$74,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021406	W SHERWOOD WAY	N LAKE ST	AUSTIN AVE	116

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118688	0.0 to 3.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$2,040**
118689	3.4 to 16.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	64	SF	$120	**$7,680**
118748	5.3 to 6.6 feet		5.0-6.0%	5 ft	7			
118690	16.5 to 18.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
118691	18.0 to 33.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,180**
118692	34.3 to 49.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	78	SF	$120	**$9,360**
118660	34.7 to 35.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
118693	50.4 to 61.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
118661	54.5 to 55.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
118694	61.8 to 65.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
118695	65.4 to 91.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	131	SF	$120	**$15,780**
118662	88.7 to 89.7 feet	**Vertical Change**	-.53"	5 ft	5	REF		
118696	94.5 to 99.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	26	SF	$120	**$3,120**
118697	99.7 to 108.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,460**
118698	109.1 to 112.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	15	SF	$120	**$1,740**
118699	114.3 to 118.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
118700	118.9 to 126.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,440**
118663	123.6 to 124.6 feet	**Vertical Change**	-.26"	5 ft	5	REF		
118701	127.1 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
118702	129.3 to 150.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$12,960**
118703	157.3 to 158.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
118704	160.6 to 162.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
118705	163.4 to 178.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	75	SF	$120	**$9,000**
118706	178.4 to 186.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	41	SF	$120	**$4,860**
118665	185.3 to 186.3 feet	**Vertical Change**	.35"	5 ft	5	REF		
118707	186.5 to 195.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	44	SF	$120	**$5,220**
118708	197.0 to 201.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**
118709	201.1 to 208.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	37	SF	$120	**$4,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021406	W SHERWOOD WAY	N LAKE ST	AUSTIN AVE	116

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118710	208.7 to 213.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
118711	213.5 to 219.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	28	SF	$120	**$3,300**
118712	219.6 to 222.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
118666	220.1 to 221.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
118713	223.0 to 228.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
118714	229.5 to 232.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
118715	232.7 to 236.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
118716	240.4 to 269.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	145	SF	$120	**$17,340**
118667	254.1 to 255.1 feet	**Vertical Change**	-.26"	5 ft	5	REF		
118668	263.1 to 264.1 feet	**Vertical Change**	-.5"	5 ft	5	REF		
118717	269.8 to 273.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
118669	271.6 to 272.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
118718	274.7 to 300.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
118670	282.1 to 283.1 feet	**Vertical Change**	.67"	5 ft	5	REF		
118671	289.2 to 290.2 feet	**Vertical Change**	.38"	5 ft	5	REF		
118672	299.5 to 300.5 feet	**Vertical Change**	1.1"	5 ft	5	REF		
118719	303.5 to 305.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
118673	306.5 to 307.5 feet	**Vertical Change**	-.6"	5 ft	5	SF	$75	**$375**
118720	328.0 to 352.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$14,940**
118721	355.3 to 359.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
118674	360.0 to 361.0 feet	**Vertical Change**	.65"	5 ft	5	SF	$75	**$375**
118722	361.4 to 362.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
118723	362.5 to 367.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
118724	369.1 to 377.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
118725	377.3 to 382.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
118746	402.0 to 413.8 feet	Key Note Segment		5 ft	59			
118675	408.7 to 409.7 feet	**Vertical Change**	.3"	5 ft	5	REF		
118726	417.9 to 420.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021406	W SHERWOOD WAY	N LAKE ST	AUSTIN AVE	116

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118727	423.7 to 425.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
118728	429.7 to 434.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
118676	434.7 to 435.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
118729	435.4 to 448.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
118677	445.7 to 446.7 feet	**Vertical Change**	1.22"	5 ft	5	REF		
118730	449.3 to 476.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	137	SF	$120	**$16,440**
118678	452.0 to 453.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
118731	492.8 to 524.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	158	SF	$120	**$18,960**
118732	527.6 to 532.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,820**
118679	529.5 to 530.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
118733	534.9 to 550.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	**$9,060**
118734	550.0 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
118680	581.2 to 582.2 feet	**Vertical Change**	.67"	5 ft	5	SF	$75	**$375**
118747	595.8 to 618.9 feet	Key Note Segment		5 ft	116			
118735	620.8 to 622.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
118736	623.5 to 625.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
118737	636.6 to 639.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
118682	637.3 to 638.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
118683	641.6 to 642.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
118738	646.8 to 649.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
118739	651.8 to 672.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
118684	672.6 to 673.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
118740	673.8 to 675.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
118741	686.8 to 709.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
118742	713.7 to 723.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
118743	723.6 to 747.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
118685	735.9 to 736.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
118686	748.7 to 749.7 feet	**Vertical Change**	.68"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021406	W SHERWOOD WAY	N LAKE ST	AUSTIN AVE	116

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118744	765.3 to 775.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
118687	776.1 to 777.1 feet	**Vertical Change**	2.35"	5 ft	5	SF	$75	**$375**
118745	783.6 to 800.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **N LAKE ST** **$327,030.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021122	W SHERWOOD WAY	N LAKE ST	900 W SHERWOOD WAY	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117686	3.1 to 4.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
117687	4.8 to 10.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
117685	8.7 to 12.5 feet	**Vertical Change**	.29"	5 ft	19	REF		

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **N LAKE ST** **$4,020.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021041	W SHERWOOD WAY	NEBRASKA AVE	N D ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117427	1.1 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	161	SF	$120	**$19,320**
117418	11.1 to 12.1 feet	**Vertical Change**	3.52"	5 ft	5	REF		
117428	37.3 to 59.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
117419	50.1 to 51.1 feet	**Vertical Change**	.59"	5 ft	5	REF		
117441	59.9 to 78.1 feet	Key Note Segment		5 ft	91			
117429	78.2 to 83.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	28	SF	$40	**$1,120**
117430	83.8 to 85.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
117431	85.9 to 93.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
117432	97.9 to 99.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
117433	105.6 to 106.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
117442	107.8 to 121.9 feet	Key Note Segment		5 ft	71			
117420	108.3 to 109.3 feet	**Vertical Change**	-.3"	5 ft	5	REF		
117434	139.0 to 143.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
117421	145.4 to 146.4 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
117443	158.1 to 170.6 feet	Key Note Segment		5 ft	63			
117435	173.9 to 180.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
117436	180.0 to 190.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
117422	181.0 to 182.0 feet	**Vertical Change**	.35"	5 ft	5	REF		
117437	192.4 to 206.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
117423	207.9 to 208.9 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
117438	209.3 to 218.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
117439	222.5 to 226.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
117424	225.8 to 226.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
117440	226.9 to 228.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
117425	227.6 to 228.6 feet	**Vertical Change**	.6"	5 ft	5	REF		
117426	229.6 to 230.6 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **NEBRASKA AVE** **$72,145.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021050	W SHERWOOD WAY	NEBRASKA AVE	DELLAVALLE AVE	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
117489	8.2 to 11.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
117490	15.4 to 16.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
117491	32.1 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
117502	47.2 to 55.6 feet	Key Note Segment		5 ft	42			
117483	47.5 to 48.5 feet	**Vertical Change**	-.34"	5 ft	5	REF		
117492	56.5 to 59.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$580**
117484	68.0 to 69.0 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
117485	84.6 to 85.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
117493	85.8 to 90.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
117503	107.8 to 121.3 feet	Key Note Segment		5 ft	68			
117486	121.6 to 122.6 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
117494	125.0 to 126.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
117495	128.2 to 130.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
117496	133.3 to 134.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
117497	136.1 to 161.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	129	SF	$120	**$15,480**
117498	164.3 to 165.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
117499	166.3 to 186.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
117504	186.2 to 197.5 feet	Key Note Segment		5 ft	57			
117500	198.8 to 208.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
117487	211.8 to 212.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
117501	215.2 to 216.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **NEBRASKA AVE** **$52,180.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2108091422	W SHERWOOD WAY	NICOLA WAY	207 SHERWOOD WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54677	1.4 to 4.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
54675	5.3 to 6.3 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
54678	8.9 to 12.3 feet	Cross Slope (PAR)	12.0-13.0%	4 ft	14	SF	$120	**$1,632**
54679	18.1 to 23.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,640**
54680	26.0 to 27.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**
54676	26.3 to 27.3 feet	**Vertical Change**	.3"	4 ft	4	REF		
54687	28.3 to 48.4 feet	Key Note Segment		4 ft	80			
54681	50.2 to 53.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,728**
54688	54.4 to 74.2 feet	Key Note Segment		4 ft	79			
54682	74.8 to 84.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	37	SF	$120	**$4,416**
54683	87.2 to 99.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
54684	99.0 to 109.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	41	SF	$120	**$4,896**
54685	109.9 to 124.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
54689	138.9 to 140.6 feet		5.0-6.0%	4 ft	7			
54686	139.0 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**

TOTAL COST FOR: N *side of* **W SHERWOOD WAY** *Starting at:* **NICOLA WAY** **$31,596.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091522	W SHERWOOD WAY	OWENS ST	TORONADO DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
55100	0.0 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,220**
55097	11.5 to 12.5 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
55101	14.1 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
55098	28.7 to 29.7 feet	**Vertical Change**	2.98"	5 ft	5	SF	$75	**$375**
55102	44.3 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
55103	58.4 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
55104	64.3 to 78.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
55105	80.8 to 82.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
55106	85.4 to 86.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
55107	87.5 to 108.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	103	SF	$120	**$12,300**
55099	118.5 to 119.5 feet	**Vertical Change**	-1.13"	5 ft	5	SF	$75	**$375**
55108	122.1 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
55109	130.9 to 149.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,980**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **OWENS ST** **$49,845.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091331	W SHERWOOD WAY	PHILIP ST	SONORA ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54354	0.0 to 27.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
54355	34.6 to 61.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,260**
54356	64.0 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
54353	64.6 to 65.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
54357	81.9 to 87.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
54358	89.4 to 108.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,280**
54359	108.8 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	**$12,660**
54360	130.7 to 154.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **PHILIP ST** **$84,000.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2106071411	W SHERWOOD WAY	ROGERS ST	1225 ROGERS ST	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
43858	0.1 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
43851	2.2 to 3.2 feet	**Vertical Change**	-.34"	4 ft	4	REF		
43859	2.6 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
43860	8.0 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	85	SF	$120	**$10,224**
43852	10.6 to 11.6 feet	**Vertical Change**	.38"	4 ft	4	REF		
43853	26.3 to 27.3 feet	**Vertical Change**	.26"	4 ft	4	REF		
43861	30.2 to 56.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	106	SF	$120	**$12,768**
43864	56.8 to 74.3 feet	Key Note Segment		4 ft	70			
43855	73.7 to 74.7 feet	**Vertical Change**	.26"	4 ft	4	REF		
43856	75.8 to 76.8 feet	**Vertical Change**	.55"	4 ft	4	SF	$75	**$300**
43862	77.3 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
43863	91.1 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,608**
43857	92.5 to 93.5 feet	**Vertical Change**	-.59"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **ROGERS ST** **$41,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091506	W SHERWOOD WAY	SHERWOOD POINTE	OWENS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54911	0.0 to 17.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	87	SF	$120	**$10,380**
54912	17.9 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
54913	21.7 to 24.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
54905	22.7 to 23.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
54914	24.6 to 37.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
54915	37.1 to 54.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
54916	54.0 to 64.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
54917	68.0 to 71.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
54918	73.7 to 82.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$4,980**
54919	83.6 to 89.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
54920	91.8 to 102.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
54921	103.8 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,560**
54906	108.7 to 109.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
54907	118.9 to 119.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
54922	132.3 to 144.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
54923	145.3 to 149.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
54924	149.3 to 150.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
54908	151.5 to 152.5 feet	**Vertical Change**	-.4"	5 ft	5	LF	$75	**$375**
54925	154.7 to 174.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	99	SF	$120	**$11,820**
54926	174.4 to 178.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
54927	180.8 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
54928	193.1 to 219.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
54929	222.8 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
54930	224.7 to 228.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
54931	228.3 to 230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
54932	232.8 to 257.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
54909	239.2 to 240.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
54933	260.3 to 263.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091506	W SHERWOOD WAY	SHERWOOD POINTE	OWENS ST	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54934	264.0 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
54910	265.8 to 266.8 feet	**Vertical Change**	-.39"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **SHERWOOD POINTE** **$141,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091349	W SHERWOOD WAY	SONORA ST	N D ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54441	0.0 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
54442	16.7 to 34.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,500**
54443	36.5 to 38.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
54444	42.3 to 45.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
54445	71.8 to 77.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
54446	90.0 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
54436	94.8 to 95.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
54447	100.4 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
54448	118.6 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	135	SF	$120	**$16,200**
54449	150.6 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
54450	160.8 to 165.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
54451	165.9 to 191.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,600**
54452	192.4 to 195.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
54453	195.8 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
54498	228.5 to 246.1 feet	Key Note Segment		5 ft	88			
54454	246.3 to 250.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	19	SF	$40	**$760**
54455	250.3 to 251.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
54456	253.8 to 259.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
54457	261.1 to 266.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
54458	269.4 to 289.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
54459	294.0 to 298.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
54460	305.8 to 319.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
54461	323.3 to 328.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
54462	335.8 to 336.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
54463	341.8 to 344.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
54464	349.8 to 351.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
54465	356.6 to 357.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
54466	363.6 to 375.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091349	W SHERWOOD WAY	SONORA ST	N D ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54467	379.2 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
54468	406.0 to 416.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
54469	420.8 to 426.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
54470	432.0 to 435.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
54471	440.0 to 446.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
54472	456.9 to 463.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
54437	467.5 to 468.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
54473	471.1 to 477.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
54474	479.8 to 482.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
54475	482.8 to 487.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
54476	490.2 to 491.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
54477	496.2 to 497.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
54478	511.8 to 519.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
54479	527.5 to 536.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
54438	527.8 to 528.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
54480	545.5 to 547.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
54481	549.6 to 560.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
54482	565.1 to 578.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
54483	584.3 to 596.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
54484	597.5 to 603.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
54485	605.1 to 606.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
54486	609.3 to 629.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
54487	638.8 to 653.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
54488	659.3 to 662.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
54489	672.8 to 712.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	197	SF	$120	**$23,640**
54490	722.3 to 736.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
54491	739.2 to 742.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
54492	744.6 to 747.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091349	W SHERWOOD WAY	SONORA ST	N D ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54493	747.8 to 752.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
54439	751.0 to 752.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
54494	753.3 to 754.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
54495	759.3 to 778.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,520**
54496	779.3 to 784.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
54497	786.6 to 790.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **SONORA ST** **$298,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108091257	W SHERWOOD WAY	TORONADO DR	DAVIS ST	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
54020	0.3 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
54021	11.8 to 35.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	119	SF	$120	**$14,280**
54022	38.1 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
54019	48.3 to 49.3 feet	**Vertical Change**	2.91"	5 ft	5	REF		
54023	49.2 to 76.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,140**
54024	79.4 to 81.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
54025	81.6 to 92.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
54026	94.8 to 107.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
54027	107.0 to 108.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
54028	111.0 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	166	SF	$120	**$19,860**
54029	144.1 to 148.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

TOTAL COST FOR: S *side of* **W SHERWOOD WAY** *Starting at:* **TORONADO DR** **$76,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031334	W SOUTH ST	402 E SOUTH ST	NEBRASKA ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120233	2.6 to 4.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$900**
120234	4.2 to 17.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,220**
120232	18.8 to 19.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
120235	18.9 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	140	SF	$120	**$16,740**
120236	49.1 to 50.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
120237	53.9 to 64.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**
120239	65.2 to 81.9 feet	Key Note Segment		5 ft	84			
120238	83.3 to 99.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **402 E SOUTH ST** **$42,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031440	W SOUTH ST	509 E SOUTH ST	N D ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120679	0.6 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
120706	3.1 to 4.5 feet		5.0-6.0%	5 ft	7			
120680	11.2 to 14.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
120681	17.2 to 25.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
120675	17.7 to 18.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
120682	28.6 to 41.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
120683	42.1 to 107.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	327	SF	$120	**$39,180**
120684	110.3 to 113.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120685	121.6 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,060**
120676	125.6 to 126.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
120686	140.3 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	140	SF	$120	**$16,800**
120687	170.8 to 186.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**
120688	189.1 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
120677	189.3 to 190.3 feet	**Vertical Change**	1.65"	5 ft	5	REF		
120689	197.8 to 204.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
120690	206.5 to 209.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120691	212.1 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	94	SF	$120	**$11,220**
120692	231.7 to 240.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
120693	242.3 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
120694	250.6 to 271.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
120704	271.3 to 290.9 feet	Key Note Segment		5 ft	98			
120695	294.3 to 295.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
120696	295.8 to 301.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
120697	306.3 to 312.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
120698	315.9 to 319.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
120699	322.6 to 324.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$1,020**
120700	324.9 to 335.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
120705	335.8 to 355.3 feet	Key Note Segment		5 ft	98			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031440	W SOUTH ST	509 E SOUTH ST	N D ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120678	353.4 to 354.4 feet	Vertical Change	.32"	5 ft	5	REF		
120701	356.9 to 379.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	112	SF	$120	**$13,440**
120702	381.4 to 387.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
120703	389.9 to 393.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	19	SF	$120	**$2,280**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **509 E SOUTH ST** **$172,995.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031419	W SOUTH ST	AUSTIN AVE	BLOKER ST	90

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120545	3.3 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120546	10.8 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
120547	25.6 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
120548	29.9 to 33.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
120549	33.9 to 38.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
120562	40.8 to 77.8 feet	Key Note Segment		5 ft	185			
120550	82.4 to 96.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
120551	99.8 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
120552	105.4 to 107.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
120563	107.8 to 133.2 feet	Key Note Segment		5 ft	127			
120553	143.7 to 152.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
120543	151.9 to 152.9 feet	**Vertical Change**	.81"	5 ft	5	REF		
120554	154.7 to 165.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
120564	158.6 to 159.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
120555	169.3 to 170.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
120556	181.2 to 187.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
120557	189.9 to 191.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
120544	192.5 to 193.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
120558	195.0 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
120559	204.1 to 216.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
120560	221.2 to 225.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
120561	230.0 to 231.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **AUSTIN AVE** **$50,694.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031435	W SOUTH ST	AUSTIN AVE	509 W SOUTH ST	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120670	0.0 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
120671	2.2 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
120665	2.3 to 5.4 feet	**Vertical Change**	-.29"	5 ft	16	REF		
120666	10.0 to 11.0 feet	**Vertical Change**	2.25"	5 ft	5	SF	$75	**$375**
120672	63.0 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120667	74.3 to 75.3 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
120668	84.8 to 85.8 feet	**Vertical Change**	1.7"	5 ft	5	SF	$75	**$375**
120669	88.2 to 89.2 feet	**Vertical Change**	1.27"	5 ft	5	SF	$75	**$375**
120674	99.3 to 101.4 feet		6.0-7.0%	5 ft	11			
120673	99.4 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **AUSTIN AVE** **$5,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031412	W SOUTH ST	AUSTIN AVE	N LAKE ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120492	9.7 to 15.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
120493	15.1 to 16.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
120494	18.3 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
120495	20.0 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
120496	24.6 to 26.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
120497	28.5 to 76.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	239	SF	$120	**$28,620**
120474	42.4 to 43.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
120498	80.3 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
120499	90.3 to 95.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
120526	95.5 to 103.7 feet	Key Note Segment		5 ft	41			
120500	103.7 to 105.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	8	SF	$40	**$300**
120527	112.5 to 125.5 feet	Key Note Segment		5 ft	65			
120476	129.8 to 130.8 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
120477	133.5 to 134.5 feet	**Vertical Change**	-.26"	5 ft	5	REF		
120501	133.6 to 139.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
120502	145.6 to 149.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120478	149.4 to 150.4 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
120503	152.8 to 156.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
120504	159.4 to 163.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
120505	165.8 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
120506	175.3 to 178.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
120528	178.4 to 191.1 feet	Key Note Segment		5 ft	64			
120479	192.9 to 193.9 feet	**Vertical Change**	.77"	5 ft	5	SF	$75	**$375**
120529	196.2 to 204.0 feet	Key Note Segment		5 ft	39			
120507	208.4 to 223.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	75	SF	$120	**$8,940**
120508	223.3 to 232.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
120480	244.9 to 245.9 feet	**Vertical Change**	2.58"	5 ft	5	SF	$75	**$375**
120509	253.3 to 258.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031412	W SOUTH ST	AUSTIN AVE	N LAKE ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120530	258.8 to 277.0 feet	Key Note Segment		5 ft	91			
120481	277.3 to 278.3 feet	Vertical Change	1.37"	5 ft	5	REF		
120531	282.7 to 302.6 feet	Key Note Segment		5 ft	100			
120482	300.8 to 301.8 feet	Vertical Change	2.33"	5 ft	5	REF		
120510	302.6 to 305.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	**$620**
120511	312.4 to 319.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
120532	319.3 to 341.2 feet	Key Note Segment		5 ft	110			
120483	320.5 to 321.5 feet	Vertical Change	.28"	5 ft	5	REF		
120484	326.0 to 327.0 feet	Vertical Change	-.36"	5 ft	5	REF		
120533	350.0 to 367.8 feet	Key Note Segment		5 ft	89			
120512	367.8 to 379.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	56	SF	$40	**$2,240**
120513	382.4 to 388.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
120485	391.4 to 392.4 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
120534	391.7 to 402.7 feet	Key Note Segment		5 ft	55			
120514	405.5 to 408.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120486	421.2 to 422.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
120535	421.3 to 449.6 feet	Key Note Segment		5 ft	142			
120515	460.3 to 471.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,480**
120536	473.2 to 485.0 feet	Key Note Segment		5 ft	59			
120516	488.2 to 511.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
120517	515.2 to 517.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
120487	515.8 to 516.8 feet	Vertical Change	-.26"	5 ft	5	REF		
120537	517.8 to 528.9 feet	Key Note Segment		5 ft	56			
120518	542.3 to 543.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
120519	545.9 to 547.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120538	560.5 to 570.4 feet	Key Note Segment		5 ft	50			
120489	561.8 to 562.8 feet	Vertical Change	-.27"	5 ft	5	REF		
120520	575.2 to 591.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031412	W SOUTH ST	AUSTIN AVE	N LAKE ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120539	593.9 to 625.0 feet	Key Note Segment		5 ft	156			
120521	625.2 to 627.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	10	SF	$40	$420
120540	631.7 to 663.4 feet	Key Note Segment		5 ft	158			
120541	680.4 to 732.8 feet	Key Note Segment		5 ft	262			
120522	732.8 to 736.1 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	17	SF	$40	$660
120523	736.1 to 745.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,820
120542	749.5 to 750.5 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
120524	753.0 to 757.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
120525	785.5 to 807.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	$13,380
120490	789.7 to 790.7 feet	Vertical Change	.4"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **AUSTIN AVE** **$146,029.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031423	W SOUTH ST	BLOKER ST	CUTTING ST	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120566	0.0 to 27.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	110	SF	$120	**$13,248**
120567	31.0 to 32.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
120568	44.8 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,584**
120569	50.9 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
120578	79.8 to 133.8 feet	Key Note Segment		4 ft	216			
120570	142.0 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
120571	157.3 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
120565	168.4 to 169.4 feet	**Vertical Change**	.35"	4 ft	4	LF	$75	**$300**
120572	172.0 to 174.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
120573	176.8 to 178.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
120574	181.8 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,800**
120575	195.0 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,608**
120576	207.6 to 218.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
120577	223.2 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **BLOKER ST** **$43,644.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031519	W SOUTH ST	COLUMBIA ST	SONORA ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120820	17.8 to 23.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	$3,660
120821	26.8 to 30.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
120822	31.8 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	$16,500
120815	72.0 to 73.0 feet	Vertical Change	.52"	5 ft	5	SF	$75	$375
120823	76.3 to 77.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
120824	77.4 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
120816	78.2 to 79.2 feet	Vertical Change	3.33"	5 ft	5	REF		
120825	85.6 to 94.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	$5,160
120826	96.3 to 103.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,260
120839	103.4 to 124.3 feet	Key Note Segment		5 ft	105			
120817	106.6 to 107.6 feet	Vertical Change	1.52"	5 ft	5	REF		
120827	127.8 to 131.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
120828	131.8 to 135.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	$2,400
120829	137.2 to 138.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
120830	138.6 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
120831	149.3 to 150.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
120832	154.0 to 157.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980
120833	159.1 to 163.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	$2,520
120840	163.3 to 189.6 feet	Key Note Segment		5 ft	131			
120819	190.2 to 191.2 feet	Vertical Change	-.37"	5 ft	5	REF		
120834	193.6 to 201.1 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	38	SF	$120	$4,500
120841	198.9 to 199.9 feet	Protruding Object	72"	5 ft	5	JOB	$99	$99
120835	206.6 to 208.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	$1,260
120836	211.7 to 214.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	$1,620
120837	216.3 to 218.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
120838	220.2 to 231.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	$7,020

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **COLUMBIA ST** **$64,794.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031243	W SOUTH ST	COLUMBIA ST	SIERRA ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120105	0.0 to 1.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
120106	2.6 to 3.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120107	19.3 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
120101	33.8 to 34.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
120108	33.8 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120109	42.8 to 43.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120120	49.6 to 68.5 feet	Key Note Segment		5 ft	95			
120110	73.1 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	125	SF	$120	**$15,000**
120111	99.6 to 103.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
120121	104.1 to 121.7 feet	Key Note Segment		5 ft	88			
120112	126.0 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
120123	126.6 to 127.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
120113	132.1 to 133.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
120114	136.8 to 143.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,260**
120115	147.7 to 150.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
120116	154.6 to 158.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
120122	158.9 to 180.6 feet	Key Note Segment		5 ft	109			
120103	169.4 to 170.4 feet	**Vertical Change**	.34"	5 ft	5	REF		
120117	181.3 to 209.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	139	SF	$40	**$5,540**
120118	211.8 to 213.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
120119	213.9 to 230.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
120104	230.3 to 231.3 feet	**Vertical Change**	.37"	5 ft	5	REF		

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **COLUMBIA ST** **$51,599.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031426	W SOUTH ST	CUTTING ST	AUSTIN AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120581	13.5 to 17.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
120582	21.2 to 31.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,848**
120583	37.8 to 39.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
120584	48.4 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
120579	49.5 to 50.5 feet	**Vertical Change**	.33"	4 ft	4	REF		
120585	58.0 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,392**
120586	75.8 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
120587	90.8 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
120588	99.8 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
120593	103.8 to 152.6 feet	Key Note Segment		4 ft	195			
120580	118.0 to 119.0 feet	**Vertical Change**	.39"	4 ft	4	REF		
120589	166.7 to 167.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
120590	212.0 to 213.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
120591	228.8 to 231.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
120592	231.5 to 232.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **CUTTING ST** **$28,752.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031400	W SOUTH ST	DELLAVALLE AVE	AUSTIN AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120398	0.0 to 8.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
120399	8.9 to 31.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
120400	35.8 to 43.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
120389	36.7 to 37.7 feet	**Vertical Change**	.39"	5 ft	5	REF		
120401	46.3 to 51.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
120390	49.6 to 50.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
120402	53.6 to 54.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
120403	57.5 to 58.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
120391	58.0 to 59.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
120404	62.7 to 64.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
120405	67.2 to 76.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,280**
120392	71.0 to 72.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
120406	76.9 to 103.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	131	SF	$120	**$15,780**
120393	84.0 to 85.0 feet	**Vertical Change**	-.35"	5 ft	5	REF		
120394	96.9 to 97.9 feet	**Vertical Change**	-.34"	5 ft	5	REF		
120407	105.3 to 107.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
120417	107.6 to 124.8 feet	Key Note Segment		5 ft	86			
120408	125.4 to 132.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	36	SF	$40	**$1,420**
120409	135.5 to 137.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
120410	140.8 to 145.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
120395	161.1 to 162.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
120411	170.5 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
120412	185.8 to 200.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
120413	203.8 to 205.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
120418	205.8 to 206.8 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
120414	207.7 to 209.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
120415	215.1 to 227.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
120416	229.8 to 231.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031400	W SOUTH ST	DELLAVALLE AVE	AUSTIN AVE	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
TOTAL COST FOR:	**S**	*side of* **W SOUTH ST**	*Starting at:* **DELLAVALLE AVE**					**$85,234.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031514	W SOUTH ST	E SOUTH ST	COLUMBIA ST	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120789	2.7 to 8.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
120790	8.3 to 10.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
120791	14.5 to 25.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
120792	25.6 to 28.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
120793	32.5 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
120794	50.2 to 59.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
120809	57.7 to 58.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
120795	62.0 to 67.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
120796	73.3 to 82.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
120785	80.9 to 81.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
120797	86.7 to 94.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
120786	100.9 to 101.9 feet	**Vertical Change**	1.23"	5 ft	5	SF	$75	**$375**
120787	103.0 to 104.0 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
120808	105.4 to 122.9 feet	Key Note Segment		5 ft	88			
120798	131.9 to 133.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120799	135.6 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
120800	148.5 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
120801	158.7 to 159.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
120802	162.2 to 169.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
120803	169.3 to 171.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
120804	173.2 to 177.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
120805	177.5 to 191.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
120806	193.5 to 196.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
120807	197.5 to 227.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	152	SF	$120	**$18,180**
120788	205.3 to 206.3 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **E SOUTH ST** **$89,589.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031511	W SOUTH ST	N D ST	E SOUTH ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120783	1.3 to 31.8 feet	Key Note Segment		5 ft	153			
120770	32.8 to 34.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
120771	35.1 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
120765	86.9 to 87.9 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
120772	96.3 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120773	100.2 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
120766	102.0 to 103.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
120774	103.8 to 106.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
120784	107.2 to 125.1 feet	Key Note Segment		5 ft	90			
120775	125.8 to 129.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
120776	134.0 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
120777	141.9 to 145.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
120767	143.1 to 144.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
120768	150.3 to 151.3 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
120778	154.0 to 165.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
120779	177.1 to 183.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
120780	186.2 to 188.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
120781	211.7 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
120782	220.8 to 221.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120769	228.6 to 229.6 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **N D ST** **$28,305.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031352	W SOUTH ST	NEBRASKA ST	DELLAVALLE AVE	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120277	0.7 to 3.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120278	10.9 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
120279	24.9 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
120280	32.3 to 40.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
120294	42.3 to 53.5 feet	Key Note Segment		5 ft	56			
120281	53.9 to 59.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,180**
120282	64.8 to 72.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
120297	68.3 to 69.3 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
120283	75.0 to 76.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$660**
120284	76.1 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
120285	89.4 to 94.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
120286	98.5 to 100.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
120287	100.2 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
120295	102.3 to 119.9 feet	Key Note Segment		5 ft	88			
120288	123.5 to 125.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
120296	125.1 to 135.1 feet	Key Note Segment		5 ft	50			
120289	138.4 to 141.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,980**
120290	146.3 to 165.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	93	SF	$120	**$11,220**
120273	162.9 to 163.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
120274	168.5 to 169.5 feet	**Vertical Change**	.47"	5 ft	5	LF	$75	**$375**
120291	174.4 to 181.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
120275	174.7 to 175.7 feet	**Vertical Change**	.46"	5 ft	5	REF		
120292	185.8 to 189.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
120293	207.3 to 220.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
120298	214.2 to 215.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
120276	221.1 to 222.1 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **NEBRASKA ST** **$63,628.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031224	W SOUTH ST	SHARON BVD	SONORA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120023	11.4 to 12.4 feet	Protruding Object	60"	5 ft	5	JOB	$99	$99
119994	14.8 to 26.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,200
119995	29.5 to 33.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
119996	38.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
119997	43.4 to 45.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
119998	52.5 to 57.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
119999	59.8 to 62.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
120000	63.3 to 68.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
120001	71.9 to 75.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
120002	77.6 to 87.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	$5,640
120003	89.3 to 110.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	106	SF	$120	$12,720
120017	110.5 to 130.2 feet	Key Note Segment		5 ft	98			
120018	134.9 to 153.4 feet	Key Note Segment		5 ft	93			
119989	147.9 to 148.9 feet	Vertical Change	-.54"	5 ft	5	REF		
120004	153.4 to 156.4 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	15	SF	$40	$600
120019	158.1 to 177.3 feet	Key Note Segment		5 ft	96			
120005	180.5 to 181.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
120020	182.2 to 201.9 feet	Key Note Segment		5 ft	99			
119990	196.6 to 197.6 feet	Vertical Change	-.28"	5 ft	5	REF		
120006	202.9 to 234.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	$18,840
119991	228.5 to 229.5 feet	Vertical Change	.41"	5 ft	5	REF		
120007	236.8 to 244.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	$4,320
120008	246.2 to 251.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	$3,240
120009	251.6 to 255.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	$2,580
120021	256.7 to 277.1 feet	Key Note Segment		5 ft	102			
119992	264.5 to 265.5 feet	Vertical Change	-.26"	5 ft	5	REF		
120010	278.4 to 281.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
119993	280.2 to 281.2 feet	Vertical Change	-.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031224	W SOUTH ST	SHARON BVD	SONORA ST	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120011	285.9 to 302.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
120024	295.5 to 296.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
120012	304.8 to 308.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
120013	308.3 to 312.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
120022	312.8 to 323.6 feet	Key Note Segment		5 ft	54			
120014	326.6 to 342.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
120025	330.6 to 331.6 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
120015	343.2 to 372.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,580**
120016	377.8 to 383.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **SHARON BVD** **$117,177.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031249	W SOUTH ST	SIERRA ST	N D ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120128	4.6 to 16.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,960**
120129	16.2 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
120124	33.0 to 34.0 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
120130	38.7 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
120131	40.7 to 44.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,460**
120142	44.8 to 70.5 feet	Key Note Segment		5 ft	129			
120125	56.3 to 57.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
120126	68.2 to 69.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
120132	72.1 to 85.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
120133	85.5 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
120134	89.0 to 97.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
120127	98.1 to 99.1 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
120143	101.7 to 123.6 feet	Key Note Segment		5 ft	110			
120135	128.3 to 135.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
120136	135.3 to 157.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,140**
120137	158.3 to 160.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
120138	164.4 to 173.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,580**
120139	181.4 to 187.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
120140	187.5 to 199.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
120144	199.6 to 224.6 feet	Key Note Segment		5 ft	125			
120141	226.3 to 228.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **SIERRA ST** **$71,130.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031208	W SOUTH ST	SONORA ST	TORRES WAY	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119938	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
119939	4.4 to 7.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,100**
119940	7.9 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
119941	21.1 to 33.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,500**
119942	37.4 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,700**
119943	64.6 to 75.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
119956	79.3 to 100.2 feet	Key Note Segment		5 ft	105			
119944	100.2 to 101.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
119945	101.6 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
119957	104.3 to 125.1 feet	Key Note Segment		5 ft	104			
119946	127.7 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119947	131.9 to 136.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
119948	138.6 to 142.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
119949	142.7 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
119950	152.2 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
119951	162.0 to 190.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
119936	191.0 to 192.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
119952	193.3 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
119953	197.4 to 215.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
119954	215.5 to 219.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
119937	219.2 to 220.2 feet	**Vertical Change**	.33"	5 ft	5	REF		
119955	219.5 to 224.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **SONORA ST** **$89,455.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031233	W SOUTH ST	SONORA ST	COLUMBIA ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
120051	1.5 to 26.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,880**
120052	29.4 to 46.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
120053	49.3 to 87.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	190	SF	$120	**$22,740**
120054	93.3 to 94.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
120055	96.7 to 109.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	66	SF	$120	**$7,860**
120066	109.8 to 124.7 feet	Key Note Segment		5 ft	75			
120050	110.4 to 111.4 feet	**Vertical Change**	.28"	5 ft	5	REF		
120056	130.5 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
120057	134.8 to 137.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
120067	137.6 to 147.2 feet	Key Note Segment		5 ft	48			
120058	147.7 to 151.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
120059	153.4 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
120068	168.2 to 182.8 feet	Key Note Segment		5 ft	73			
120060	183.5 to 185.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
120061	191.3 to 197.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
120062	198.4 to 204.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
120063	206.3 to 214.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
120064	218.8 to 222.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
120065	222.1 to 234.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: S *side of* **W SOUTH ST** *Starting at:* **SONORA ST** **$92,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031219	W SOUTH ST	TORRES WAY	SHARON BVD	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119979	2.2 to 9.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
119980	9.5 to 13.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
119981	15.6 to 17.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
119982	22.6 to 31.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**
119983	34.2 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
119984	48.1 to 61.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
119985	62.3 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
119986	75.1 to 100.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	125	SF	$120	**$15,000**
119988	101.3 to 113.3 feet	Key Note Segment		5 ft	60			
119987	114.2 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: N *side of* **W SOUTH ST** *Starting at:* **TORRES WAY** **$43,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181631	W YOSEMITE AVE	N G ST	N I ST	115

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38421	21.0 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
38422	34.1 to 35.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
38423	41.7 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
38411	51.3 to 52.3 feet	**Vertical Change**	.32"	5 ft	5	REF		
38424	74.3 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
38425	80.6 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
38426	99.0 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38427	109.2 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,060**
38428	123.1 to 126.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
38429	133.3 to 140.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
38430	146.3 to 147.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
38431	150.0 to 162.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
38432	166.5 to 171.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
38412	175.6 to 176.6 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
38433	184.3 to 188.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
38413	188.4 to 189.4 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
38434	194.6 to 200.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
38435	209.0 to 213.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
38436	220.2 to 226.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
38437	251.7 to 253.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
38438	256.8 to 262.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
38439	268.5 to 270.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
38466	270.1 to 290.9 feet	Key Note Segment		5 ft	104			
38440	291.5 to 295.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
38441	296.5 to 299.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,740**
38442	299.6 to 312.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	66	SF	$120	**$7,920**
38443	313.3 to 321.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
38444	321.7 to 324.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181631	W YOSEMITE AVE	N G ST	N I ST	115

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38445	329.1 to 341.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	**$7,560**
38446	342.0 to 347.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
38447	351.3 to 379.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,100**
38448	379.8 to 388.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
38449	389.4 to 394.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
38450	396.3 to 423.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
38451	427.2 to 430.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
38452	433.7 to 436.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
38453	439.1 to 447.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
38414	471.5 to 472.5 feet	**Vertical Change**	.92"	5 ft	5	SF	$75	**$375**
38454	479.4 to 483.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
38415	480.5 to 481.5 feet	**Vertical Change**	.76"	5 ft	5	REF		
38455	485.2 to 488.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
38456	488.2 to 489.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
38457	493.6 to 496.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
38458	498.8 to 506.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
38459	509.7 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
38467	510.8 to 537.6 feet	Key Note Segment		5 ft	134			
38416	535.2 to 536.2 feet	**Vertical Change**	-.35"	5 ft	5	REF		
38460	537.6 to 541.1 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	18	SF	$40	**$700**
38461	547.1 to 565.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
38462	569.0 to 576.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
38417	575.5 to 576.5 feet	**Vertical Change**	.5"	5 ft	5	REF		
38463	578.7 to 597.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,220**
38418	594.1 to 595.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
38419	603.1 to 604.1 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
38464	604.3 to 606.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
38465	606.4 to 607.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181631	W YOSEMITE AVE	N G ST	N I ST	115

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38420	618.6 to 619.6 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N G ST** **$182,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181601	W YOSEMITE AVE	N GATEWAY DR	N G ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
38237	0.0 to 3.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	18	SF	$120	**$2,160**
38246	3.6 to 24.9 feet	Key Note Segment		6 ft	128			
38238	27.7 to 29.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
38239	34.1 to 82.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	290	SF	$120	**$34,776**
38231	55.3 to 56.3 feet	**Vertical Change**	.6"	6 ft	6	REF		
38232	62.8 to 63.8 feet	**Vertical Change**	.36"	6 ft	6	REF		
38240	86.3 to 92.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	37	SF	$120	**$4,392**
38241	93.7 to 110.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	102	SF	$120	**$12,240**
38247	111.1 to 133.1 feet	Key Note Segment		6 ft	132			
38233	113.1 to 114.1 feet	**Vertical Change**	.37"	6 ft	6	REF		
38242	143.3 to 148.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,672**
38243	151.3 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	**$2,520**
38234	175.7 to 176.7 feet	**Vertical Change**	.48"	6 ft	6	LF	$75	**$450**
38235	185.2 to 186.2 feet	**Vertical Change**	-.26"	6 ft	6	LF	$75	**$450**
38244	188.3 to 192.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
38245	199.8 to 219.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	118	SF	$120	**$14,112**
38236	245.7 to 246.7 feet	**Vertical Change**	-.73"	6 ft	6	SF	$75	**$450**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N GATEWAY DR** **$79,326.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181040	W YOSEMITE AVE	N J ST	N K ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36992	0.0 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	30	SF	$120	**$3,600**
36993	7.3 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	126	SF	$120	**$15,120**
36994	36.1 to 37.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
36982	44.7 to 45.7 feet	Vertical Change	-.28"	6 ft	6	LF	$75	**$450**
36995	53.4 to 57.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	22	SF	$120	**$2,592**
37011	57.4 to 70.1 feet	Key Note Segment		6 ft	76			
36983	58.0 to 59.0 feet	Vertical Change	.26"	6 ft	6	REF		
36984	68.8 to 69.8 feet	Vertical Change	.62"	6 ft	6	REF		
36996	86.5 to 89.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	**$2,016**
36997	89.3 to 98.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,408**
36998	110.5 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	24	SF	$120	**$2,880**
37012	114.5 to 133.8 feet	Key Note Segment		6 ft	116			
36985	132.2 to 133.2 feet	Vertical Change	-.35"	6 ft	6	REF		
36999	133.8 to 135.3 feet	Cross Slope (Driveway)	3.0-4.0%	6 ft	9	SF	$40	**$360**
37000	135.3 to 152.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	105	SF	$120	**$12,600**
36986	153.0 to 154.0 feet	Vertical Change	-.32"	6 ft	6	REF		
37001	153.5 to 163.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	59	SF	$120	**$7,056**
37002	164.1 to 166.8 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	16	SF	$120	**$1,944**
37003	168.2 to 171.2 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	18	SF	$120	**$2,160**
37004	171.2 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	28	SF	$120	**$3,312**
37005	175.8 to 194.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	110	SF	$120	**$13,176**
36987	178.3 to 179.3 feet	Vertical Change	-.29"	6 ft	6	REF		
36988	209.8 to 210.8 feet	Vertical Change	2.73"	6 ft	6	REF		
37006	210.2 to 213.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,016**
37007	216.2 to 220.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,736**
36989	218.4 to 219.4 feet	Vertical Change	1.09"	6 ft	6	REF		
36990	231.4 to 232.4 feet	Vertical Change	-.72"	6 ft	6	REF		
37008	231.7 to 239.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,472**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181040	W YOSEMITE AVE	N J ST	N K ST	103

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37009	239.3 to 243.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	23	SF	$120	**$2,808**
37010	244.0 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,376**
36991	244.4 to 245.4 feet	**Vertical Change**	.57"	6 ft	6	REF		

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N J ST** **$90,378.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181043	W YOSEMITE AVE	N K ST	N L ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37015	0.0 to 3.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
37016	12.3 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,500**
37017	45.2 to 48.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
37018	61.9 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
37019	68.1 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
37033	71.2 to 73.3 feet		5.0-6.0%	5 ft	11			
37034	71.2 to 73.3 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
37020	72.2 to 74.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
37021	85.6 to 89.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
37013	89.7 to 90.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
37022	92.0 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
37023	101.3 to 102.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
37032	118.8 to 137.9 feet	Key Note Segment		5 ft	96			
37024	138.6 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
37025	150.1 to 166.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,900**
37026	166.8 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
37027	173.8 to 196.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,380**
37028	221.3 to 223.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
37014	228.4 to 229.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
37029	229.0 to 230.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
37030	238.5 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
37031	245.3 to 257.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N K ST** **$71,940.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181047	W YOSEMITE AVE	N L ST	N M ST	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37038	4.4 to 19.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,060**
37035	4.5 to 5.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
37039	22.8 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
37058	34.0 to 43.4 feet	Key Note Segment		5 ft	47			
37036	41.3 to 42.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
37040	43.8 to 45.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
37037	45.7 to 48.5 feet	**Vertical Change**	.31"	5 ft	14	REF		
37041	45.8 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
37042	50.6 to 51.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
37043	58.6 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
37044	68.5 to 69.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
37045	70.7 to 73.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
37046	84.0 to 87.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
37047	91.4 to 98.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
37048	98.8 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
37049	102.8 to 109.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
37050	117.8 to 120.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
37059	120.8 to 140.2 feet	Key Note Segment		5 ft	97			
37051	144.7 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
37052	149.2 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
37053	187.6 to 189.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
37054	190.5 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
37055	211.8 to 215.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
37060	216.4 to 223.3 feet	Key Note Segment		5 ft	35			
37056	230.9 to 234.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
37057	244.3 to 258.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N L ST** **$70,200.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181052	W YOSEMITE AVE	N M ST	N N ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37073	3.0 to 26.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	142	SF	$120	**$16,992**
37061	39.9 to 40.9 feet	**Vertical Change**	-.28"	6 ft	6	LF	$75	**$450**
37074	47.9 to 49.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$1,008**
37075	49.6 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	202	SF	$120	**$24,264**
37062	50.3 to 51.3 feet	**Vertical Change**	.27"	6 ft	6	REF		
37076	84.4 to 115.9 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	189	SF	$120	**$22,680**
37077	116.1 to 119.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,088**
37090	119.1 to 137.8 feet	Key Note Segment		6 ft	112			
37063	129.3 to 130.3 feet	**Vertical Change**	.96"	6 ft	6	REF		
37064	139.2 to 140.2 feet	**Vertical Change**	.27"	6 ft	6	LF	$75	**$450**
37065	144.6 to 145.6 feet	**Vertical Change**	.7"	6 ft	6	SF	$75	**$450**
37078	148.6 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,304**
37066	149.5 to 150.5 feet	**Vertical Change**	.38"	6 ft	6	REF		
37079	158.5 to 160.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**
37080	162.2 to 167.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	31	SF	$120	**$3,744**
37081	171.3 to 174.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	16	SF	$120	**$1,944**
37082	174.0 to 180.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,896**
37067	175.5 to 176.5 feet	**Vertical Change**	.42"	6 ft	6	REF		
37068	178.4 to 179.4 feet	**Vertical Change**	-.28"	6 ft	6	REF		
37091	180.8 to 189.5 feet	Key Note Segment		6 ft	52			
37083	191.0 to 192.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$936**
37070	199.1 to 200.1 feet	**Vertical Change**	.31"	6 ft	6	REF		
37084	199.3 to 212.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	80	SF	$120	**$9,648**
37085	213.7 to 218.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	29	SF	$120	**$3,456**
37086	219.1 to 232.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	79	SF	$120	**$9,504**
37071	219.5 to 220.5 feet	**Vertical Change**	-.31"	6 ft	6	REF		
37087	234.7 to 246.5 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	71	SF	$120	**$8,496**
37088	247.0 to 248.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	9	SF	$120	**$1,080**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181052	W YOSEMITE AVE	N M ST	N N ST	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37072	250.6 to 251.6 feet	Vertical Change	.99"	6 ft	6	REF		
37089	251.2 to 253.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,584**
37092	261.8 to 264.3 feet		5.0-6.0%	6 ft	15			
37093	261.8 to 264.3 feet	Running Slope	5.0-6.0%	6 ft	15	SF	$120	**$1,800**
37094	264.3 to 266.8 feet		6.0-7.0%	6 ft	15			

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N M ST** **$118,854.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181056	W YOSEMITE AVE	N N ST	N O ST	101

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37106	0.0 to 6.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	37	SF	$120	**$4,392**
37107	6.1 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,816**
37095	13.6 to 14.6 feet	**Vertical Change**	-.29"	6 ft	6	LF	$75	**$450**
37108	16.9 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
37109	22.4 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
37110	27.9 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	56	SF	$120	**$6,768**
37096	56.9 to 57.9 feet	**Vertical Change**	-.26"	6 ft	6	LF	$75	**$450**
37111	69.8 to 70.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37112	81.3 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	141	SF	$120	**$16,920**
37097	88.9 to 89.9 feet	**Vertical Change**	.56"	6 ft	6	REF		
37117	115.8 to 134.6 feet	Key Note Segment		6 ft	113			
37113	134.6 to 135.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	7	SF	$40	**$288**
37114	153.2 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
37098	161.0 to 162.0 feet	**Vertical Change**	.32"	6 ft	6	LF	$75	**$450**
37115	185.8 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,384**
37099	220.8 to 221.8 feet	**Vertical Change**	-.5"	6 ft	6	REF		
37116	220.9 to 256.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	215	SF	$120	**$25,848**
37100	231.3 to 232.3 feet	**Vertical Change**	.3"	6 ft	6	REF		
37101	236.8 to 237.8 feet	**Vertical Change**	.26"	6 ft	6	REF		
37102	241.6 to 242.6 feet	**Vertical Change**	1.14"	6 ft	6	REF		
37103	243.4 to 244.4 feet	**Vertical Change**	3.08"	6 ft	6	REF		
37104	245.5 to 248.8 feet	**Vertical Change**	.37"	6 ft	20	REF		
37105	251.9 to 252.9 feet	**Vertical Change**	-.26"	6 ft	6	REF		
37118	257.8 to 260.2 feet		5.0-6.0%	6 ft	14			
37119	257.8 to 260.2 feet	Running Slope	5.0-6.0%	6 ft	14	SF	$120	**$1,728**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N N ST** **$72,414.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181059	W YOSEMITE AVE	N O ST	N P ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37128	0.0 to 2.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
37120	6.8 to 7.8 feet	**Vertical Change**	.64"	6 ft	6	SF	$75	**$450**
37129	10.7 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
37130	17.2 to 18.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37121	20.7 to 21.7 feet	**Vertical Change**	-.41"	6 ft	6	LF	$75	**$450**
37131	31.3 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
37122	44.4 to 45.4 feet	**Vertical Change**	.28"	6 ft	6	LF	$75	**$450**
37132	87.5 to 95.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,544**
37133	99.1 to 112.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	78	SF	$120	**$9,360**
37124	101.0 to 102.0 feet	**Vertical Change**	.3"	6 ft	6	REF		
37138	112.3 to 131.4 feet	Key Note Segment		6 ft	115			
37134	138.9 to 141.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
37135	175.8 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37136	193.6 to 195.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
37125	196.0 to 197.0 feet	**Vertical Change**	.78"	6 ft	6	SF	$75	**$450**
37137	233.8 to 234.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37126	239.5 to 240.5 feet	**Vertical Change**	1.51"	6 ft	6	SF	$75	**$450**
37127	250.1 to 251.1 feet	**Vertical Change**	.32"	6 ft	6	LF	$75	**$450**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N O ST** **$33,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181105	W YOSEMITE AVE	N P ST	N Q ST	87

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37141	3.8 to 8.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,096**
37139	6.9 to 7.9 feet	**Vertical Change**	.27"	6 ft	6	REF		
37142	10.2 to 32.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	132	SF	$120	**$15,840**
37143	33.3 to 50.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	104	SF	$120	**$12,456**
37144	51.7 to 75.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	143	SF	$120	**$17,208**
37145	75.6 to 111.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	217	SF	$120	**$26,064**
37146	112.3 to 116.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	24	SF	$120	**$2,880**
37147	141.0 to 144.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,808**
37148	149.1 to 156.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	42	SF	$120	**$5,040**
37149	160.0 to 163.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	21	SF	$120	**$2,520**
37150	167.8 to 175.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,184**
37151	178.4 to 183.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	29	SF	$120	**$3,528**
37152	183.6 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
37153	193.2 to 197.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	27	SF	$120	**$3,240**
37154	208.2 to 209.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37155	212.0 to 220.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	53	SF	$120	**$6,336**
37156	220.8 to 223.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	17	SF	$120	**$2,088**
37157	224.8 to 225.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37158	235.8 to 264.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	171	SF	$120	**$20,520**
37140	237.1 to 238.1 feet	**Vertical Change**	.28"	6 ft	6	REF		

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N P ST** **$131,616.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181110	W YOSEMITE AVE	N Q ST	OLIVE AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37176	0.0 to 1.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
37185	1.8 to 29.8 feet	Key Note Segment		6 ft	168			
37159	10.3 to 11.3 feet	**Vertical Change**	3.44"	6 ft	6	REF		
37160	28.5 to 29.5 feet	**Vertical Change**	2.92"	6 ft	6	REF		
37177	55.1 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	130	SF	$120	**$15,624**
37161	55.8 to 56.8 feet	**Vertical Change**	2.77"	6 ft	6	REF		
37162	62.5 to 63.5 feet	**Vertical Change**	3.46"	6 ft	6	REF		
37163	76.1 to 77.1 feet	**Vertical Change**	3.49"	6 ft	6	REF		
37178	80.4 to 87.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	41	SF	$120	**$4,968**
37164	82.9 to 83.9 feet	**Vertical Change**	3.51"	6 ft	6	REF		
37186	87.3 to 120.0 feet	Key Note Segment		6 ft	196			
37165	92.0 to 93.0 feet	**Vertical Change**	3.54"	6 ft	6	REF		
37166	94.3 to 95.3 feet	**Vertical Change**	2.67"	6 ft	6	REF		
37167	110.1 to 113.4 feet	**Vertical Change**	3.51"	6 ft	20	REF		
37179	120.2 to 122.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	11	SF	$40	**$432**
37187	125.5 to 146.1 feet	Key Note Segment		6 ft	124			
37168	135.1 to 136.1 feet	**Vertical Change**	3.38"	6 ft	6	REF		
37169	144.2 to 145.2 feet	**Vertical Change**	2.49"	6 ft	6	REF		
37180	146.1 to 160.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	87	SF	$40	**$3,480**
37170	160.0 to 161.0 feet	**Vertical Change**	3.08"	6 ft	6	REF		
37188	161.8 to 194.9 feet	Key Note Segment		6 ft	199			
37171	182.7 to 185.9 feet	**Vertical Change**	3.54"	6 ft	19	REF		
37172	187.3 to 188.3 feet	**Vertical Change**	2.17"	6 ft	6	REF		
37173	189.5 to 190.5 feet	**Vertical Change**	2.87"	6 ft	6	REF		
37181	198.1 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	196	SF	$120	**$23,544**
37174	198.5 to 199.5 feet	**Vertical Change**	3.49"	6 ft	6	REF		
37175	200.8 to 201.8 feet	**Vertical Change**	2.92"	6 ft	6	REF		
37182	233.5 to 242.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	55	SF	$120	**$6,552**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181110	W YOSEMITE AVE	N Q ST	OLIVE AVE	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37189	242.6 to 270.1 feet	Key Note Segment		6 ft	165			
37183	270.1 to 281.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	67	SF	$40	**$2,688**
37184	289.3 to 290.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **N Q ST** **$59,736.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181127	W YOSEMITE AVE	OLIVE AVE	S Q ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37237	0.0 to 1.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
37238	1.9 to 3.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
37239	6.7 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	145	SF	$120	**$17,460**
37240	36.3 to 38.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
37246	38.4 to 65.1 feet	Key Note Segment		5 ft	133			
37241	65.1 to 87.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	111	SF	$40	**$4,440**
37232	68.6 to 69.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
37247	87.3 to 117.4 feet	Key Note Segment		5 ft	151			
37233	100.5 to 101.5 feet	**Vertical Change**	-.45"	5 ft	5	REF		
37242	117.4 to 138.1 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	104	SF	$40	**$4,140**
37235	120.1 to 121.1 feet	**Vertical Change**	.85"	5 ft	5	REF		
37243	138.3 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
37244	142.7 to 144.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
37236	143.5 to 144.5 feet	**Vertical Change**	.44"	5 ft	5	REF		
37245	146.8 to 165.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,100**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **OLIVE AVE** **$42,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2106081640	W YOSEMITE AVE	S H ST	S I ST	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
46647	6.0 to 21.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
46648	21.7 to 30.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,460**
46649	33.1 to 43.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
46650	47.7 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
46651	63.4 to 66.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
46652	70.1 to 89.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,880**
46653	91.1 to 102.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**
46654	103.3 to 106.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
46655	108.5 to 114.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
46656	114.1 to 123.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
46663	123.5 to 153.0 feet	Key Note Segment		5 ft	148			
46642	150.7 to 151.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
46643	157.8 to 158.8 feet	**Vertical Change**	.38"	5 ft	5	LF	$75	**$375**
46657	160.9 to 162.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
46658	199.6 to 202.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
46659	208.1 to 212.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
46644	220.3 to 221.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
46660	220.3 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
46645	222.8 to 223.8 feet	**Vertical Change**	-1.33"	5 ft	5	SF	$75	**$375**
46646	226.2 to 227.2 feet	**Vertical Change**	.46"	5 ft	5	LF	$75	**$375**
46661	230.1 to 233.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
46662	239.3 to 253.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **S H ST** **$78,945.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181302	W YOSEMITE AVE	S H ST	S GATEWAY DR	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37494	0.0 to 1.0 feet		5.0-6.0%	6 ft	6			
37453	9.0 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,528**
37454	29.0 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	42	SF	$120	**$5,040**
37455	38.3 to 43.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
37456	77.6 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
37457	83.3 to 87.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	26	SF	$120	**$3,168**
37443	86.6 to 87.6 feet	**Vertical Change**	-.31"	6 ft	6	REF		
37458	87.9 to 91.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	19	SF	$120	**$2,232**
37459	91.0 to 95.8 feet	Cross Slope (PAR)	8.0-9.0%	6 ft	29	SF	$120	**$3,456**
37460	95.8 to 107.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	67	SF	$120	**$8,064**
37461	107.0 to 109.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	14	SF	$120	**$1,656**
37462	109.3 to 118.6 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	56	SF	$120	**$6,696**
37444	118.1 to 119.1 feet	**Vertical Change**	-.36"	6 ft	6	REF		
37463	118.6 to 121.3 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	16	SF	$120	**$1,944**
37464	140.3 to 156.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	94	SF	$120	**$11,304**
37465	158.7 to 159.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
37466	159.8 to 161.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
37445	167.4 to 168.4 feet	**Vertical Change**	.31"	6 ft	6	LF	$75	**$450**
37467	176.8 to 189.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	75	SF	$120	**$9,000**
37468	238.8 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,376**
37446	261.0 to 262.0 feet	**Vertical Change**	.29"	6 ft	6	LF	$75	**$450**
37469	276.3 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	12	SF	$120	**$1,440**
37493	291.2 to 304.6 feet	Key Note Segment		6 ft	80			
37447	292.5 to 293.5 feet	**Vertical Change**	1.29"	6 ft	6	REF		
37470	304.6 to 310.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	35	SF	$40	**$1,392**
37471	325.2 to 326.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
37472	328.3 to 331.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	17	SF	$120	**$2,088**
37473	333.4 to 344.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	67	SF	$120	**$8,064**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181302	W YOSEMITE AVE	S H ST	S GATEWAY DR	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37448	337.2 to 338.2 feet	Vertical Change	.56"	6 ft	6	REF		
37449	339.2 to 340.2 feet	Vertical Change	-.26"	6 ft	6	REF		
37474	348.4 to 357.1 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	52	SF	$120	**$6,264**
37475	357.1 to 364.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	43	SF	$120	**$5,112**
37476	364.4 to 366.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
37477	424.8 to 444.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	120	SF	$120	**$14,400**
37478	450.0 to 453.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	23	SF	$120	**$2,736**
37450	452.8 to 453.8 feet	Vertical Change	.29"	6 ft	6	REF		
37479	457.5 to 467.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	58	SF	$120	**$6,984**
37451	467.0 to 468.0 feet	Vertical Change	.26"	6 ft	6	REF		
37480	469.3 to 473.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,664**
37481	476.8 to 479.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	18	SF	$120	**$2,160**
37482	496.6 to 512.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	95	SF	$120	**$11,448**
37483	512.7 to 514.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	10	SF	$120	**$1,152**
37452	524.5 to 525.5 feet	Vertical Change	-.55"	6 ft	6	SF	$75	**$450**
37484	532.3 to 533.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37485	536.0 to 551.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	93	SF	$120	**$11,160**
37486	555.6 to 571.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	97	SF	$120	**$11,592**
37487	575.7 to 580.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	30	SF	$120	**$3,600**
37488	585.1 to 587.1 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	12	SF	$120	**$1,440**
37489	587.1 to 589.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
37490	595.0 to 599.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	29	SF	$120	**$3,528**
37491	603.7 to 605.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$936**
37492	605.6 to 608.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,088**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S H ST** **$175,038.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2105181035	W YOSEMITE AVE	S I ST	N J ST	82

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
36969	23.8 to 37.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
36962	29.6 to 30.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
36970	40.1 to 62.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	112	SF	$120	**$13,440**
36963	47.6 to 48.6 feet	**Vertical Change**	-.58"	5 ft	5	REF		
36971	65.9 to 83.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,440**
36964	81.0 to 82.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36980	83.3 to 109.2 feet	Key Note Segment		5 ft	130			
36972	109.2 to 125.0 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	79	SF	$40	**$3,160**
36965	112.1 to 113.1 feet	**Vertical Change**	.36"	5 ft	5	REF		
36981	126.0 to 144.8 feet	Key Note Segment		5 ft	94			
36973	144.8 to 146.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	10	SF	$40	**$400**
36974	146.8 to 157.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,360**
36975	162.0 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$21,000**
36966	184.3 to 185.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
36976	202.7 to 207.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
36977	208.8 to 225.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
36967	219.5 to 220.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
36978	237.4 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
36968	240.9 to 241.9 feet	**Vertical Change**	-.27"	5 ft	5	REF		
36979	264.1 to 265.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**

TOTAL COST FOR: NW *side of* **W YOSEMITE AVE** *Starting at:* **S I ST** **$89,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181256	W YOSEMITE AVE	S I ST	S H ST	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37435	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	14	SF	$120	**$1,656**
37436	2.3 to 4.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
37441	4.0 to 83.3 feet	Key Note Segment		6 ft	476			
37433	99.6 to 100.6 feet	**Vertical Change**	.29"	6 ft	6	LF	$75	**$450**
37434	107.1 to 108.1 feet	**Vertical Change**	.28"	6 ft	6	LF	$75	**$450**
37437	111.2 to 112.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37442	115.9 to 150.7 feet	Key Note Segment		6 ft	209			
37438	157.2 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
37439	194.2 to 198.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$3,024**
37440	260.8 to 266.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	36	SF	$120	**$4,320**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S I ST** **$13,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181158	W YOSEMITE AVE	S J ST	S I ST	84

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37412	14.6 to 22.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,472**
37413	22.4 to 24.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	13	SF	$120	**$1,512**
37414	26.8 to 50.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	142	SF	$120	**$17,064**
37429	50.5 to 58.1 feet	Key Note Segment		6 ft	46			
37415	58.6 to 61.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	19	SF	$120	**$2,304**
37416	67.8 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	7	SF	$120	**$792**
37417	76.8 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	59	SF	$120	**$7,056**
37418	90.3 to 100.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,416**
37419	100.6 to 102.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	10	SF	$120	**$1,224**
37420	107.2 to 108.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
37421	112.2 to 118.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	37	SF	$120	**$4,392**
37430	118.3 to 138.2 feet	Key Note Segment		6 ft	119			
37422	155.1 to 157.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	13	SF	$120	**$1,584**
37411	160.4 to 161.4 feet	**Vertical Change**	-.26"	6 ft	6	LF	$75	**$450**
37423	175.3 to 194.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	112	SF	$120	**$13,464**
37424	194.0 to 205.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	71	SF	$120	**$8,496**
37425	211.0 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
37426	217.0 to 231.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	88	SF	$120	**$10,584**
37427	231.7 to 242.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,488**
37428	242.8 to 260.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	107	SF	$120	**$12,816**
37431	263.6 to 265.8 feet		5.0-6.0%	6 ft	13			
37432	263.6 to 265.8 feet	Running Slope	5.0-6.0%	6 ft	13	SF	$120	**$1,584**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S J ST** **$107,658.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181154	W YOSEMITE AVE	S K ST	S J ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37376	3.1 to 4.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
37377	9.3 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
37378	13.6 to 31.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	108	SF	$120	**$12,960**
37369	23.4 to 26.5 feet	**Vertical Change**	.31"	6 ft	19	REF		
37379	34.1 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,184**
37380	41.8 to 46.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	25	SF	$120	**$3,024**
37381	47.1 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	25	SF	$120	**$2,952**
37382	51.2 to 53.2 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	12	SF	$120	**$1,440**
37383	54.3 to 56.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
37384	58.8 to 59.9 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	7	SF	$120	**$792**
37385	60.9 to 61.9 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
37386	61.9 to 65.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
37387	67.2 to 70.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	20	SF	$120	**$2,448**
37388	73.2 to 79.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	40	SF	$120	**$4,752**
37389	85.8 to 91.1 feet	Cross Slope (PAR)	5.0-6.0%	6 ft	32	SF	$120	**$3,816**
37390	91.6 to 100.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	52	SF	$120	**$6,192**
37391	101.8 to 105.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	24	SF	$120	**$2,880**
37392	108.7 to 109.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$792**
37393	109.9 to 112.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
37410	115.8 to 133.8 feet	Key Note Segment		6 ft	108			
37370	116.7 to 117.7 feet	**Vertical Change**	-.27"	6 ft	6	REF		
37371	119.3 to 120.3 feet	**Vertical Change**	2.56"	6 ft	6	REF		
37372	133.9 to 134.9 feet	**Vertical Change**	-.41"	6 ft	6	REF		
37394	136.4 to 140.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
37395	142.3 to 145.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	16	SF	$120	**$1,944**
37396	145.0 to 147.6 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	16	SF	$120	**$1,872**
37397	148.4 to 160.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	70	SF	$120	**$8,424**
37398	161.5 to 165.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	25	SF	$120	**$3,024**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181154	W YOSEMITE AVE	S K ST	S J ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37399	167.9 to 171.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	23	SF	$120	**$2,808**
37400	178.4 to 181.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	17	SF	$120	**$2,016**
37401	181.2 to 191.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	62	SF	$120	**$7,416**
37402	192.1 to 198.0 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	35	SF	$120	**$4,248**
37403	199.3 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37373	203.1 to 204.1 feet	**Vertical Change**	.63"	6 ft	6	REF		
37404	203.9 to 208.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
37405	216.3 to 219.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	17	SF	$120	**$2,016**
37406	219.5 to 224.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	32	SF	$120	**$3,816**
37374	222.7 to 223.7 feet	**Vertical Change**	-.26"	6 ft	6	REF		
37407	226.9 to 232.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	32	SF	$120	**$3,888**
37408	232.3 to 233.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$1,008**
37409	238.9 to 251.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	75	SF	$120	**$9,000**
37375	256.7 to 257.7 feet	**Vertical Change**	-.62"	6 ft	6	SF	$75	**$450**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S K ST** **$114,210.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181150	W YOSEMITE AVE	S L ST	S K ST	93

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37351	0.0 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	139	SF	$120	**$16,632**
37348	11.7 to 12.7 feet	**Vertical Change**	.3"	6 ft	6	REF		
37352	25.2 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37353	34.2 to 65.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	187	SF	$120	**$22,392**
37349	63.2 to 64.2 feet	**Vertical Change**	-.33"	6 ft	6	REF		
37354	67.6 to 73.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	33	SF	$120	**$3,960**
37355	79.2 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	22	SF	$120	**$2,592**
37356	88.6 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	43	SF	$120	**$5,184**
37357	105.0 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
37368	116.5 to 135.2 feet	Key Note Segment		6 ft	112			
37358	135.2 to 137.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	14	SF	$40	**$576**
37359	151.9 to 160.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	54	SF	$120	**$6,480**
37360	164.4 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
37361	179.4 to 190.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	69	SF	$120	**$8,280**
37362	190.9 to 214.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	143	SF	$120	**$17,208**
37363	214.8 to 220.4 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	34	SF	$120	**$4,032**
37350	222.1 to 223.1 feet	**Vertical Change**	.41"	6 ft	6	REF		
37364	223.1 to 224.3 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	7	SF	$120	**$864**
37365	224.4 to 232.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	46	SF	$120	**$5,472**
37366	232.0 to 245.8 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	83	SF	$120	**$9,936**
37367	247.9 to 249.2 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S L ST** **$113,904.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181147	W YOSEMITE AVE	S M ST	S L ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37332	18.3 to 21.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	19	SF	$120	**$2,232**
37345	21.8 to 29.4 feet	Key Note Segment		6 ft	46			
37333	29.4 to 34.5 feet	Cross Slope (Driveway)	2.0-3.0%	6 ft	31	SF	$40	**$1,224**
37334	36.8 to 37.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
37335	38.0 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	91	SF	$120	**$10,872**
37336	55.6 to 60.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,384**
37328	63.1 to 64.1 feet	Vertical Change	1.6"	6 ft	6	SF	$75	**$450**
37346	64.8 to 72.3 feet	Key Note Segment		6 ft	45			
37337	74.5 to 79.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,312**
37338	84.5 to 86.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
37339	90.8 to 96.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,816**
37340	100.7 to 116.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	94	SF	$120	**$11,304**
37329	101.0 to 102.0 feet	Vertical Change	1.02"	6 ft	6	REF		
37347	116.4 to 135.8 feet	Key Note Segment		6 ft	116			
37330	117.1 to 118.1 feet	Vertical Change	-.42"	6 ft	6	REF		
37331	134.5 to 135.5 feet	Vertical Change	-.26"	6 ft	6	REF		
37341	136.3 to 137.4 feet	Cross Slope (Driveway)	2.0-3.0%	6 ft	7	SF	$40	**$264**
37342	162.4 to 166.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
37343	175.1 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	303	SF	$120	**$36,360**
37344	228.8 to 251.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	138	SF	$120	**$16,560**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S M ST** **$95,394.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181143	W YOSEMITE AVE	S N ST	S M ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37311	0.0 to 1.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,152**
37305	2.1 to 3.1 feet	**Vertical Change**	-.46"	6 ft	6	LF	$75	**$450**
37312	40.3 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	66	SF	$120	**$7,920**
37313	71.6 to 77.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	38	SF	$120	**$4,536**
37314	86.9 to 91.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	28	SF	$120	**$3,384**
37315	93.8 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	95	SF	$120	**$11,448**
37325	109.7 to 129.7 feet	Key Note Segment		6 ft	120			
37327	130.8 to 132.1 feet		8.0-9.0%	6 ft	8			
37316	140.0 to 146.0 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	36	SF	$120	**$4,320**
37317	150.3 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
37318	160.8 to 162.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	11	SF	$120	**$1,296**
37319	168.0 to 170.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,728**
37320	174.0 to 181.0 feet	Cross Slope (PAR)	6.0-7.0%	6 ft	42	SF	$120	**$5,040**
37306	179.4 to 180.4 feet	**Vertical Change**	-.3"	6 ft	6	REF		
37321	182.9 to 191.0 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	49	SF	$120	**$5,832**
37307	193.5 to 194.5 feet	**Vertical Change**	3.42"	6 ft	6	SF	$75	**$450**
37308	203.1 to 204.1 feet	**Vertical Change**	.5"	6 ft	6	REF		
37322	203.3 to 204.6 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37326	206.4 to 217.3 feet	Key Note Segment		6 ft	65			
37309	208.9 to 209.9 feet	**Vertical Change**	.6"	6 ft	6	REF		
37323	217.3 to 235.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	6 ft	110	SF	$40	**$4,392**
37324	235.8 to 248.4 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	76	SF	$120	**$9,072**
37310	245.0 to 246.0 feet	**Vertical Change**	1.76"	6 ft	6	REF		

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S N ST** **$65,124.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181140	W YOSEMITE AVE	S O ST	S N ST	98

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37288	1.1 to 9.1 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	48	SF	$120	**$5,760**
37289	9.9 to 15.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	35	SF	$120	**$4,248**
37290	18.5 to 22.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	26	SF	$120	**$3,168**
37303	65.3 to 73.3 feet	Key Note Segment		6 ft	48			
37284	69.7 to 70.7 feet	**Vertical Change**	-.26"	6 ft	6	REF		
37291	74.0 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	32	SF	$120	**$3,888**
37292	79.4 to 106.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	164	SF	$120	**$19,656**
37293	109.1 to 114.5 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	32	SF	$120	**$3,888**
37294	114.8 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	6	SF	$120	**$720**
37304	116.4 to 135.8 feet	Key Note Segment		6 ft	116			
37285	139.1 to 140.1 feet	**Vertical Change**	-.47"	6 ft	6	LF	$75	**$450**
37295	172.5 to 179.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	44	SF	$120	**$5,328**
37296	179.9 to 190.7 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	65	SF	$120	**$7,776**
37286	188.8 to 189.8 feet	**Vertical Change**	.28"	6 ft	6	REF		
37297	193.5 to 200.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	40	SF	$120	**$4,752**
37298	201.2 to 203.3 feet	Cross Slope (PAR)	4.0-5.0%	6 ft	13	SF	$120	**$1,512**
37299	206.8 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	6	SF	$120	**$720**
37300	207.8 to 209.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	8	SF	$120	**$936**
37301	212.9 to 233.7 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	125	SF	$120	**$14,976**
37302	235.8 to 256.6 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	125	SF	$120	**$14,976**
37287	235.9 to 236.9 feet	**Vertical Change**	-.26"	6 ft	6	REF		

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S O ST** **$92,754.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181137	W YOSEMITE AVE	S P ST	S O ST	94

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37268	1.2 to 2.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	10	SF	$120	**$1,224**
37269	19.0 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	14	SF	$120	**$1,656**
37260	28.7 to 29.7 feet	**Vertical Change**	-.36"	6 ft	6	LF	$75	**$450**
37270	45.2 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	37	SF	$120	**$4,392**
37271	58.2 to 69.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	70	SF	$120	**$8,424**
37281	70.8 to 80.8 feet	Key Note Segment		6 ft	60			
37272	80.8 to 88.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	6 ft	45	SF	$40	**$1,800**
37273	89.5 to 92.9 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	20	SF	$120	**$2,448**
37261	91.2 to 92.2 feet	**Vertical Change**	-.41"	6 ft	6	REF		
37274	103.0 to 105.5 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	15	SF	$120	**$1,800**
37275	110.1 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	64	SF	$120	**$7,632**
37282	121.4 to 140.7 feet	Key Note Segment		6 ft	116			
37262	121.5 to 122.5 feet	**Vertical Change**	-.36"	6 ft	6	REF		
37263	139.2 to 140.2 feet	**Vertical Change**	-.49"	6 ft	6	REF		
37276	142.3 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	111	SF	$120	**$13,320**
37264	159.5 to 160.5 feet	**Vertical Change**	-.33"	6 ft	6	REF		
37277	164.2 to 172.4 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	49	SF	$120	**$5,904**
37265	172.3 to 173.3 feet	**Vertical Change**	.38"	6 ft	6	REF		
37283	173.6 to 189.5 feet	Key Note Segment		6 ft	95			
37266	190.8 to 191.8 feet	**Vertical Change**	.62"	6 ft	6	SF	$75	**$450**
37267	214.9 to 215.9 feet	**Vertical Change**	.34"	6 ft	6	REF		
37278	215.8 to 217.2 feet	Cross Slope (PAR)	3.0-4.0%	6 ft	8	SF	$120	**$1,008**
37279	219.9 to 238.3 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	110	SF	$120	**$13,248**
37280	243.8 to 259.1 feet	Cross Slope (PAR)	2.0-3.0%	6 ft	92	SF	$120	**$11,016**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S P ST** **$74,772.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2105181132	W YOSEMITE AVE	S Q ST	S P ST	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
37251	0.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
37252	3.6 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
37253	16.6 to 28.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
37254	31.8 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
37248	57.0 to 58.0 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
37259	68.4 to 91.8 feet	Key Note Segment		5 ft	117			
37249	69.3 to 70.3 feet	**Vertical Change**	-.72"	5 ft	5	REF		
37250	85.7 to 86.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
37255	91.8 to 95.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	18	SF	$40	**$700**
37256	95.3 to 97.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
37257	159.8 to 169.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
37258	174.0 to 181.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: SE *side of* **W YOSEMITE AVE** *Starting at:* **S Q ST** **$29,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111148	WALLACE AVE	305 WALLACE AVE	S LAKE ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58885	0.0 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
58875	19.8 to 20.8 feet	**Vertical Change**	-.32"	5 ft	5	LF	$75	**$375**
58906	25.9 to 42.6 feet	Key Note Segment		5 ft	84			
58886	49.2 to 52.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
58887	56.8 to 58.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
58876	57.0 to 58.0 feet	**Vertical Change**	-.42"	5 ft	5	REF		
58888	62.7 to 65.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
58889	83.6 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
58907	96.4 to 108.8 feet	Key Note Segment		5 ft	62			
58890	110.6 to 115.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
58908	115.8 to 133.8 feet	Key Note Segment		5 ft	90			
58877	119.0 to 120.0 feet	**Vertical Change**	.63"	5 ft	5	REF		
58891	133.8 to 155.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	106	SF	$40	**$4,240**
58878	135.3 to 136.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
58909	156.3 to 170.9 feet	Key Note Segment		5 ft	73			
58892	172.3 to 199.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	134	SF	$120	**$16,080**
58879	172.9 to 173.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
58893	199.7 to 212.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
58894	215.8 to 221.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
58910	221.2 to 237.1 feet	Key Note Segment		5 ft	80			
58895	239.1 to 247.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
58880	239.2 to 240.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
58896	257.2 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
58911	266.2 to 283.0 feet	Key Note Segment		5 ft	84			
58881	266.5 to 267.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
58897	283.0 to 285.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	14	SF	$40	**$560**
58882	283.8 to 284.8 feet	**Vertical Change**	.64"	5 ft	5	REF		
58898	286.9 to 290.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111148	WALLACE AVE	305 WALLACE AVE	S LAKE ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58899	292.9 to 306.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,340**
58900	307.4 to 312.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
58912	312.0 to 330.3 feet	Key Note Segment		5 ft	92			
58901	330.3 to 332.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
58902	333.1 to 349.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
58903	352.3 to 353.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
58913	354.7 to 370.7 feet	Key Note Segment		5 ft	80			
58904	371.8 to 373.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
58883	376.2 to 377.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
58905	380.6 to 401.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
58884	398.3 to 399.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WALLACE AVE** *Starting at:* **305 WALLACE AVE** **$108,350.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111138	WALLACE AVE	A ST	288 WALLACE AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58821	2.9 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
58840	13.3 to 32.6 feet	Key Note Segment		5 ft	97			
58810	14.0 to 15.0 feet	**Vertical Change**	2.74"	5 ft	5	REF		
58811	30.8 to 31.8 feet	**Vertical Change**	1.53"	5 ft	5	REF		
58822	32.8 to 38.7 feet	**Cross Slope (Driveway)**	6.0-7.0%	5 ft	30	SF	$40	**$1,180**
58841	39.3 to 58.7 feet	Key Note Segment		5 ft	97			
58812	40.1 to 41.1 feet	**Vertical Change**	.6"	5 ft	5	REF		
58813	58.4 to 59.4 feet	**Vertical Change**	-.3"	5 ft	5	REF		
58823	60.2 to 63.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
58824	63.4 to 77.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,160**
58825	77.0 to 78.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58814	81.4 to 82.4 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
58826	83.2 to 84.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58815	85.8 to 86.8 feet	**Vertical Change**	-.36"	5 ft	5	REF		
58827	86.8 to 88.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
58816	87.6 to 88.6 feet	**Vertical Change**	.43"	5 ft	5	REF		
58828	90.9 to 98.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
58829	99.0 to 103.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
58842	103.8 to 120.4 feet	Key Note Segment		5 ft	83			
58830	120.4 to 124.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	22	SF	$40	**$860**
58831	125.1 to 129.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
58832	130.7 to 141.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
58818	142.1 to 143.1 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
58833	143.5 to 148.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
58843	149.2 to 161.1 feet	Key Note Segment		5 ft	60			
58834	161.1 to 188.9 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	139	SF	$40	**$5,560**
58835	188.9 to 191.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
58836	191.8 to 192.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111138	WALLACE AVE	A ST	288 WALLACE AVE	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58837	192.8 to 196.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
58844	196.3 to 209.1 feet	Key Note Segment		5 ft	64			
58819	197.3 to 198.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
58838	209.8 to 221.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	**$7,200**
58839	222.7 to 233.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	56	SF	$120	**$6,660**
58845	235.9 to 249.5 feet	Key Note Segment		5 ft	68			
58820	248.7 to 249.7 feet	**Vertical Change**	.6"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **WALLACE AVE** *Starting at:* **A ST** **$64,510.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131123	WALLACE AVE	OLIVE AVE	OLIVE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61978	0.3 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
61979	6.3 to 17.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
61959	13.6 to 14.6 feet	**Vertical Change**	.51"	5 ft	5	REF		
62016	18.8 to 38.6 feet	Key Note Segment		5 ft	99			
61960	28.8 to 29.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
61980	39.8 to 43.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
62017	44.1 to 64.6 feet	Key Note Segment		5 ft	102			
61961	44.7 to 45.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
61962	64.1 to 65.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
61981	64.6 to 81.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	82	SF	$40	**$3,280**
61982	84.8 to 88.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
61983	92.2 to 94.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
61984	96.1 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
61963	97.4 to 98.4 feet	**Vertical Change**	.95"	5 ft	5	REF		
61964	100.0 to 101.0 feet	**Vertical Change**	2.45"	5 ft	5	REF		
62018	104.2 to 125.1 feet	Key Note Segment		5 ft	105			
61965	112.1 to 113.1 feet	**Vertical Change**	3.01"	5 ft	5	REF		
61966	115.2 to 116.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
61985	128.5 to 130.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
62019	130.4 to 151.5 feet	Key Note Segment		5 ft	106			
61986	153.0 to 162.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
61987	165.8 to 171.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
61988	172.6 to 181.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
61989	183.3 to 191.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
62020	191.3 to 211.4 feet	Key Note Segment		5 ft	101			
62021	215.6 to 239.6 feet	Key Note Segment		5 ft	120			
61990	243.5 to 258.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
61991	261.3 to 277.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131123	WALLACE AVE	OLIVE AVE	OLIVE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61967	269.4 to 270.4 feet	Vertical Change	.26"	5 ft	5	REF		
62022	278.4 to 300.6 feet	Key Note Segment		5 ft	111			
61992	301.5 to 308.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
62023	308.6 to 330.9 feet	Key Note Segment		5 ft	111			
61968	319.5 to 320.5 feet	Vertical Change	-.29"	5 ft	5	REF		
61993	334.3 to 340.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
61994	344.1 to 350.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
62024	351.3 to 373.2 feet	Key Note Segment		5 ft	110			
62025	375.0 to 398.3 feet	Key Note Segment		5 ft	117			
61995	398.3 to 400.7 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	12	SF	$40	**$480**
61996	401.0 to 402.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
61997	405.3 to 413.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$5,040**
62026	413.8 to 461.9 feet	Key Note Segment		5 ft	241			
61969	438.0 to 439.0 feet	Vertical Change	.29"	5 ft	5	REF		
61970	451.7 to 452.7 feet	Vertical Change	-.47"	5 ft	5	REF		
61998	461.9 to 464.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	15	SF	$40	**$580**
61999	464.8 to 466.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
62000	469.5 to 473.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
62001	477.0 to 479.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
62027	479.3 to 504.2 feet	Key Note Segment		5 ft	125			
61971	487.7 to 488.7 feet	Vertical Change	.3"	5 ft	5	REF		
62002	505.1 to 509.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
61972	507.5 to 508.5 feet	Vertical Change	-.27"	5 ft	5	REF		
62028	512.9 to 532.3 feet	Key Note Segment		5 ft	97			
62003	532.3 to 535.7 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	17	SF	$40	**$680**
62004	536.4 to 538.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
62005	540.6 to 552.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$7,020**
62006	552.8 to 561.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2108131123	WALLACE AVE	OLIVE AVE	OLIVE AVE	80

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
62007	568.4 to 575.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
62029	575.4 to 594.8 feet	Key Note Segment		5 ft	97			
61973	584.4 to 585.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
62030	601.3 to 621.8 feet	Key Note Segment		5 ft	103			
62008	622.0 to 659.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	189	SF	$40	**$7,560**
61974	639.3 to 640.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
62031	660.9 to 681.5 feet	Key Note Segment		5 ft	103			
61975	678.3 to 679.3 feet	**Vertical Change**	.28"	5 ft	5	REF		
62009	681.7 to 684.2 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	13	SF	$40	**$500**
62010	686.1 to 687.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
62032	687.8 to 708.3 feet	Key Note Segment		5 ft	103			
62011	708.6 to 715.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
62012	716.0 to 747.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	159	SF	$120	**$19,080**
62033	747.8 to 767.0 feet	Key Note Segment		5 ft	96			
61976	750.5 to 751.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
62013	767.3 to 772.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	28	SF	$40	**$1,120**
61977	768.1 to 769.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
62034	774.1 to 794.6 feet	Key Note Segment		5 ft	103			
62014	794.9 to 810.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	80	SF	$40	**$3,180**
62015	814.8 to 817.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: S *side of* **WALLACE AVE** *Starting at:* **OLIVE AVE** **$141,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111144	WALLACE AVE	S A ST	301 WALLACE AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58870	0.0 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
58865	0.8 to 1.8 feet	**Vertical Change**	.98"	5 ft	5	REF		
58866	10.9 to 11.9 feet	**Vertical Change**	.44"	5 ft	5	REF		
58871	11.5 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
58872	29.3 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	122	SF	$120	**$14,580**
58867	30.4 to 31.4 feet	**Vertical Change**	.43"	5 ft	5	REF		
58869	59.5 to 60.5 feet	**Vertical Change**	1.79"	5 ft	5	SF	$75	**$375**
58874	66.6 to 77.1 feet	Key Note Segment		5 ft	53			
58873	77.1 to 78.6 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**

TOTAL COST FOR: E *side of* **WALLACE AVE** *Starting at:* **S A ST** **$23,295.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111114	WALLACE AVE	S LAKE ST	SUNRISE AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58608	1.8 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
58598	7.9 to 8.9 feet	**Vertical Change**	.34"	5 ft	5	REF		
58609	10.6 to 32.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	108	SF	$120	**$13,020**
58610	35.5 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
58611	41.4 to 51.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
58612	62.2 to 70.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
58599	72.0 to 73.0 feet	**Vertical Change**	2.08"	5 ft	5	REF		
58613	72.7 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
58600	73.9 to 74.9 feet	**Vertical Change**	3.4"	5 ft	5	REF		
58601	76.6 to 77.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
58614	86.8 to 90.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
58615	93.2 to 96.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
58636	97.5 to 112.3 feet	Key Note Segment		5 ft	74			
58602	112.3 to 113.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
58616	112.6 to 115.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
58603	118.9 to 119.9 feet	**Vertical Change**	.58"	5 ft	5	REF		
58617	119.7 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
58637	124.6 to 139.2 feet	Key Note Segment		5 ft	73			
58618	166.6 to 183.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
58604	170.4 to 171.4 feet	**Vertical Change**	1.94"	5 ft	5	REF		
58638	183.9 to 198.2 feet	Key Note Segment		5 ft	72			
58619	198.6 to 205.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,840**
58620	205.2 to 210.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
58639	210.8 to 226.5 feet	Key Note Segment		5 ft	79			
58621	231.5 to 245.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	68	SF	$120	**$8,160**
58622	245.1 to 246.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
58605	246.9 to 247.9 feet	**Vertical Change**	-.38"	5 ft	5	LF	$75	**$375**
58623	250.0 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111114	WALLACE AVE	S LAKE ST	SUNRISE AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58640	251.1 to 275.3 feet	Key Note Segment		5 ft	121			
58624	275.3 to 307.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	163	SF	$40	$6,520
58606	294.5 to 295.5 feet	Vertical Change	.29"	5 ft	5	REF		
58607	307.1 to 308.1 feet	Vertical Change	.29"	5 ft	5	REF		
58641	310.8 to 330.0 feet	Key Note Segment		5 ft	96			
58625	330.2 to 338.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	41	SF	$40	$1,620
58626	341.7 to 346.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	$2,580
58642	348.0 to 362.1 feet	Key Note Segment		5 ft	71			
58627	362.3 to 363.9 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	8	SF	$40	$320
58628	363.9 to 366.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
58629	368.8 to 384.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	76	SF	$120	$9,120
58630	384.0 to 386.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	$1,320
58631	386.2 to 388.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	$1,500
58632	388.7 to 393.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	$3,060
58643	395.3 to 423.3 feet	Key Note Segment		5 ft	140			
58633	429.7 to 432.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	$1,860
58634	432.8 to 459.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	$15,900
58635	462.3 to 485.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	118	SF	$120	$14,160

TOTAL COST FOR: E *side of* **WALLACE AVE** *Starting at:* **S LAKE ST** **$126,090.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111128	WALLACE AVE	S LAKE ST	A ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58736	0.0 to 7.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,440**
58737	7.4 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
58722	36.1 to 37.1 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
58738	41.0 to 43.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
58739	46.4 to 50.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
58760	51.9 to 67.4 feet	Key Note Segment		5 ft	78			
58723	52.6 to 53.6 feet	**Vertical Change**	.42"	5 ft	5	REF		
58724	65.5 to 66.5 feet	**Vertical Change**	.38"	5 ft	5	REF		
58761	71.0 to 84.6 feet	Key Note Segment		5 ft	68			
58740	85.6 to 112.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,320**
58741	118.0 to 121.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
58742	124.8 to 160.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	178	SF	$120	**$21,300**
58725	141.1 to 142.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
58743	163.5 to 166.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
58744	167.1 to 177.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
58726	170.0 to 171.0 feet	**Vertical Change**	-.36"	5 ft	5	REF		
58745	180.3 to 190.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
58746	194.6 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
58747	202.6 to 209.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,960**
58762	209.2 to 233.0 feet	Key Note Segment		5 ft	119			
58727	222.2 to 223.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
58748	233.0 to 247.2 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	71	SF	$40	**$2,840**
58763	247.9 to 259.3 feet	Key Note Segment		5 ft	57			
58728	248.8 to 249.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
58749	259.3 to 315.8 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	283	SF	$40	**$11,300**
58729	292.4 to 293.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
58764	315.8 to 327.0 feet	Key Note Segment		5 ft	56			
58730	317.2 to 318.2 feet	**Vertical Change**	.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111128	WALLACE AVE	S LAKE ST	A ST	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58750	327.0 to 334.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	36	SF	$40	**$1,440**
58731	327.5 to 328.5 feet	Vertical Change	.34"	5 ft	5	REF		
58765	334.6 to 344.0 feet	Key Note Segment		5 ft	47			
58751	344.3 to 346.8 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	13	SF	$40	**$500**
58752	351.5 to 365.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
58753	365.8 to 392.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	134	SF	$120	**$16,080**
58732	392.3 to 393.3 feet	Vertical Change	.74"	5 ft	5	REF		
58754	392.8 to 403.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
58755	405.8 to 408.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
58756	416.1 to 421.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
58757	425.3 to 426.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58733	428.4 to 429.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
58766	434.9 to 443.9 feet	Key Note Segment		5 ft	45			
58758	462.9 to 464.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
58734	476.0 to 477.0 feet	Vertical Change	-.37"	5 ft	5	LF	$75	**$375**
58759	479.4 to 483.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
58767	498.9 to 500.2 feet		6.0-7.0%	5 ft	7			
58735	499.2 to 500.2 feet	Vertical Change	-.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **WALLACE AVE** *Starting at:* **S LAKE ST** **$141,240.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2108111141	WALLACE AVE	STREET END	A ST	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58861	0.4 to 16.6 feet	Key Note Segment		5 ft	81			
58846	15.2 to 16.2 feet	Vertical Change	.43"	5 ft	5	REF		
58851	16.8 to 17.8 feet	Cross Slope (Driveway)	6.0-7.0%	5 ft	5	SF	$40	**$200**
58852	17.8 to 32.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	71	SF	$120	**$8,520**
58853	35.1 to 59.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	120	SF	$120	**$14,400**
58862	59.1 to 75.7 feet	Key Note Segment		5 ft	83			
58854	76.3 to 80.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	**$800**
58855	80.3 to 86.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
58863	87.4 to 99.7 feet	Key Note Segment		5 ft	62			
58847	88.8 to 89.8 feet	Vertical Change	.42"	5 ft	5	REF		
58856	99.8 to 112.0 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	61	SF	$40	**$2,440**
58848	104.1 to 105.1 feet	Vertical Change	-.28"	5 ft	5	REF		
58857	112.0 to 140.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	143	SF	$120	**$17,160**
58849	118.9 to 119.9 feet	Vertical Change	.26"	5 ft	5	REF		
58858	140.6 to 148.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,860**
58864	148.7 to 165.9 feet	Key Note Segment		5 ft	86			
58859	166.1 to 238.1 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	360	SF	$40	**$14,400**
58850	212.8 to 213.8 feet	Vertical Change	.3"	5 ft	5	REF		
58860	238.1 to 250.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**

TOTAL COST FOR: E *side of* **WALLACE AVE** *Starting at:* **STREET END** **$73,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111119	WALLACE AVE	SUNRISE AVE	S LAKE ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58656	2.2 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
58644	9.3 to 10.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
58657	13.6 to 18.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
58658	21.2 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
58659	50.7 to 52.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
58660	54.9 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
58689	69.3 to 97.5 feet	Key Note Segment		5 ft	141			
58645	83.3 to 84.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
58661	100.7 to 126.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,600**
58662	126.7 to 134.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
58663	134.4 to 143.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
58690	143.1 to 162.0 feet	Key Note Segment		5 ft	95			
58664	162.4 to 164.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	11	SF	$40	**$420**
58665	165.0 to 166.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
58666	166.2 to 169.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
58667	169.8 to 184.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	73	SF	$120	**$8,760**
58668	187.8 to 199.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	57	SF	$120	**$6,780**
58669	203.7 to 208.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
58691	208.8 to 226.0 feet	Key Note Segment		5 ft	86			
58670	226.1 to 234.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	43	SF	$40	**$1,700**
58671	235.3 to 236.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
58646	239.6 to 240.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
58672	241.4 to 244.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
58692	245.1 to 264.2 feet	Key Note Segment		5 ft	96			
58647	257.8 to 258.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
58673	264.2 to 285.6 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	107	SF	$40	**$4,280**
58674	286.0 to 295.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
58698	300.5 to 303.0 feet		5.0-6.0%	5 ft	13			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111119	WALLACE AVE	SUNRISE AVE	S LAKE ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58699	300.5 to 303.0 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
58648	301.7 to 302.7 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
58693	304.4 to 319.2 feet	Key Note Segment		5 ft	74			
58649	306.5 to 307.5 feet	**Vertical Change**	1.47"	5 ft	5	REF		
58675	320.1 to 326.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
58694	330.8 to 345.8 feet	Key Note Segment		5 ft	75			
58676	351.2 to 358.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
58650	359.9 to 360.9 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$375**
58677	365.8 to 367.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
58695	374.1 to 388.2 feet	Key Note Segment		5 ft	71			
58678	389.6 to 390.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
58679	393.0 to 395.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
58651	396.2 to 397.2 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
58680	398.4 to 402.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
58681	406.2 to 407.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
58682	408.5 to 409.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
58652	408.9 to 409.9 feet	**Vertical Change**	.53"	5 ft	5	REF		
58700	410.8 to 411.8 feet		6.0-7.0%	5 ft	5			
58653	416.9 to 417.9 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
58683	420.8 to 425.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
58684	426.5 to 428.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
58696	432.9 to 447.3 feet	Key Note Segment		5 ft	72			
58685	447.3 to 450.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	16	SF	$40	**$640**
58654	449.3 to 450.3 feet	**Vertical Change**	.59"	5 ft	5	REF		
58686	452.5 to 457.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
58697	460.1 to 474.7 feet	Key Note Segment		5 ft	73			
58687	474.7 to 479.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	23	SF	$40	**$900**
58688	482.5 to 491.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2108111119	WALLACE AVE	SUNRISE AVE	S LAKE ST	96

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
58655	489.6 to 490.6 feet	Vertical Change	-.29"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **WALLACE AVE** *Starting at:* **SUNRISE AVE** **$124,790.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2110211100	WALNUT ST	427 WALNUT ST	MONTEREY ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79098	1.0 to 5.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
79099	8.7 to 11.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
79100	11.6 to 17.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
79101	17.6 to 29.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,960**
79102	29.6 to 113.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	422	SF	$120	**$50,580**

TOTAL COST FOR: S *side of* **WALNUT ST** *Starting at:* **427 WALNUT ST** **$65,280.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101444	WASHINGTON CT	320 WASHINGTON CT	WASHINGTON ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132006	0.0 to 2.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
132007	3.3 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
132002	4.8 to 5.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
132008	7.4 to 10.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
132025	10.7 to 24.8 feet	Key Note Segment		5 ft	71			
132009	24.8 to 41.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	85	SF	$40	**$3,400**
132003	32.0 to 33.0 feet	**Vertical Change**	.54"	5 ft	5	REF		
132004	35.1 to 36.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
132010	41.8 to 46.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
132026	46.3 to 55.5 feet	Key Note Segment		5 ft	46			
132011	55.5 to 69.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	69	SF	$40	**$2,740**
132012	71.4 to 80.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,700**
132027	81.7 to 91.1 feet	Key Note Segment		5 ft	47			
132013	98.4 to 123.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
132028	124.4 to 134.0 feet	Key Note Segment		5 ft	48			
132014	143.4 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
132015	150.2 to 161.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
132016	161.6 to 167.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
132029	168.3 to 177.4 feet	Key Note Segment		5 ft	46			
132017	177.4 to 181.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$780**
132018	182.2 to 188.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
132019	189.2 to 200.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
132020	200.8 to 204.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
132031	202.2 to 203.2 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
132021	205.0 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
132030	210.9 to 220.5 feet	Key Note Segment		5 ft	48			
132005	221.4 to 222.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
132022	221.6 to 223.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NE	2202101444	WASHINGTON CT	320 WASHINGTON CT	WASHINGTON ST	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132023	224.8 to 229.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
132024	229.5 to 231.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: NE *side of* **WASHINGTON CT** *Starting at:* **320 WASHINGTON CT** **$67,340.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101439	WASHINGTON CT	WASHINGTON AVE	304 WASHINGTON CT	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131976	0.3 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
131983	8.5 to 17.8 feet	Key Note Segment		5 ft	47			
131977	17.8 to 25.0 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	36	SF	$40	**$1,440**
131978	28.6 to 30.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
131979	30.5 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,420**
131975	35.9 to 36.9 feet	**Vertical Change**	.82"	5 ft	5	REF		
131984	51.6 to 61.5 feet	Key Note Segment		5 ft	50			
131980	61.5 to 63.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	10	SF	$40	**$380**
131981	70.2 to 76.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
131982	91.3 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**

TOTAL COST FOR: SW *side of* **WASHINGTON CT** *Starting at:* **WASHINGTON AVE** **$21,560.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SW	2202101441	WASHINGTON CT	WASHINGTON ST	320 WASHINGTON CT	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131988	0.0 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
131989	7.3 to 9.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
131990	13.2 to 16.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
131991	16.6 to 21.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
132000	18.6 to 19.6 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
131998	39.0 to 49.3 feet	Key Note Segment		5 ft	52			
131985	40.0 to 41.0 feet	**Vertical Change**	.63"	5 ft	5	REF		
131992	49.3 to 50.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	8	SF	$40	**$300**
131993	50.8 to 52.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131986	51.1 to 52.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
132001	55.2 to 56.2 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
131987	57.7 to 60.4 feet	**Vertical Change**	.37"	5 ft	14	LF	$75	**$1,013**
131994	62.3 to 64.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
131995	71.8 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
131999	75.3 to 85.2 feet	Key Note Segment		5 ft	50			
131996	85.2 to 88.2 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	15	SF	$40	**$600**
131997	92.1 to 103.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$6,900**

TOTAL COST FOR: SW *side of* **WASHINGTON CT** *Starting at:* **WASHINGTON ST** **$21,910.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101436	WASHINGTON ST	1009 WASHINGTON ST	1001 WASHINGTON ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131954	0.0 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
131952	4.8 to 5.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
131955	15.0 to 16.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131958	16.2 to 36.5 feet	Key Note Segment		5 ft	102			
131953	51.8 to 52.8 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
131956	55.3 to 63.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
131957	64.8 to 66.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
131959	66.8 to 82.4 feet	Key Note Segment		5 ft	78			

TOTAL COST FOR: NW *side of* **WASHINGTON ST** *Starting at:* **1009 WASHINGTON ST** **$10,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101438	WASHINGTON ST	1014 WASHINGTON ST	WASHINGTON CT	83

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131965	0.0 to 1.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
131974	2.8 to 15.0 feet	Key Note Segment		5 ft	61			
131966	16.5 to 47.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	157	SF	$120	**$18,840**
131960	47.4 to 50.5 feet	**Vertical Change**	.52"	5 ft	16	REF		
131967	55.2 to 61.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
131968	61.6 to 75.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
131961	62.4 to 63.4 feet	**Vertical Change**	1.72"	5 ft	5	REF		
131962	77.3 to 78.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
131969	81.8 to 91.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
131963	85.3 to 86.3 feet	**Vertical Change**	.94"	5 ft	5	REF		
131970	94.0 to 121.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	137	SF	$120	**$16,440**
131964	111.9 to 112.9 feet	**Vertical Change**	2.45"	5 ft	5	REF		
131971	121.4 to 128.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,380**
131972	128.7 to 140.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	57	SF	$120	**$6,840**
131973	140.4 to 142.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **1014 WASHINGTON ST** **$67,035.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2108121427	WASHINGTON ST	233 VINEYARD AVE	VINEYARD AVE	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61058	0.0 to 1.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
61059	4.4 to 13.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,700**
61060	19.8 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
61057	22.0 to 23.0 feet	**Vertical Change**	1.33"	5 ft	5	SF	$75	**$375**
61061	25.1 to 32.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
61062	40.2 to 43.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
61063	47.2 to 54.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
61064	52.8 to 54.3 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: NW *side of* **WASHINGTON ST** *Starting at:* **233 VINEYARD AVE** **$18,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121424	WASHINGTON ST	718 WASHINGTON ST	720 WASHINGTON ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
61050	0.1 to 8.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,428**
61051	9.0 to 33.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	111	SF	$120	**$13,284**
61055	36.6 to 54.8 feet	Key Note Segment		5 ft	82			
61052	55.3 to 62.1 feet	**Cross Slope (Driveway)**	7.0-8.0%	5 ft	31	SF	$40	**$1,224**
61056	62.2 to 79.4 feet	Key Note Segment		5 ft	77			
61053	80.1 to 100.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	91	SF	$120	**$10,908**
61054	100.3 to 102.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **718 WASHINGTON ST** **$30,924.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101336	WASHINGTON ST	736 WASHINGTON ST	LILLY ST	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131716	0.0 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	154	SF	$120	**$18,420**
131710	18.1 to 19.1 feet	**Vertical Change**	-.38"	5 ft	5	REF		
131711	22.1 to 23.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
131720	25.1 to 26.1 feet	**Continuous Width**	36"	5 ft	5	SF	$120	**$600**
131712	30.1 to 31.1 feet	**Vertical Change**	.31"	5 ft	5	REF		
131717	30.8 to 41.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
131713	33.9 to 34.9 feet	**Vertical Change**	.4"	5 ft	5	REF		
131718	42.6 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
131719	53.2 to 76.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	117	SF	$120	**$14,040**
131715	60.3 to 61.3 feet	**Vertical Change**	.94"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **736 WASHINGTON ST** **$40,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101346	WASHINGTON ST	LILLY ST	820 WASHINGTON ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131768	4.4 to 9.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$2,940**
131769	9.3 to 13.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
131786	14.1 to 43.3 feet	Key Note Segment		5 ft	146			
131770	47.4 to 49.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
131771	51.9 to 58.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
131772	58.3 to 62.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
131773	62.2 to 74.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,380**
131759	69.3 to 70.3 feet	**Vertical Change**	.67"	5 ft	5	REF		
131774	75.3 to 77.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
131787	80.2 to 109.6 feet	Key Note Segment		5 ft	147			
131760	113.2 to 114.2 feet	**Vertical Change**	2.54"	5 ft	5	SF	$75	**$375**
131775	114.4 to 123.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,700**
131761	118.1 to 119.1 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
131762	122.3 to 123.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
131776	126.2 to 127.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
131764	128.0 to 129.0 feet	**Vertical Change**	.37"	5 ft	5	REF		
131777	128.7 to 132.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
131778	140.6 to 146.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
131788	152.4 to 173.1 feet	Key Note Segment		5 ft	104			
131779	174.7 to 175.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
131780	176.0 to 177.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
131765	177.8 to 178.8 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
131781	180.2 to 182.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
131766	184.0 to 185.0 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
131782	185.7 to 187.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
131767	185.9 to 186.9 feet	**Vertical Change**	.52"	5 ft	5	REF		
131783	191.4 to 193.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
131784	193.3 to 200.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101346	WASHINGTON ST	LILLY ST	820 WASHINGTON ST	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131789	203.0 to 213.7 feet	Key Note Segment		5 ft	54			
131785	215.5 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **LILLY ST** **$45,300.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
NW	2202101405	WASHINGTON ST	MAGNOLIA ST	911 WASHINGTON ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131841	5.4 to 6.4 feet	Continuous Width	24"	4 ft	4	SF	$120	**$480**
131842	26.2 to 27.2 feet	Continuous Width	36"	4 ft	4	SF	$120	**$480**
131839	30.2 to 31.2 feet	Vertical Change	.63"	4 ft	4	SF	$75	**$300**
131843	47.0 to 48.0 feet	Continuous Width	36"	4 ft	4	SF	$120	**$480**
131840	52.9 to 57.6 feet	Vertical Change	.5"	4 ft	19	SF	$75	**$1,410**

TOTAL COST FOR: NW *side of* **WASHINGTON ST** *Starting at:* **MAGNOLIA ST** **$3,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2108121403	WASHINGTON ST	MALONE ST	307 WASHINGTON ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
60967	0.8 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,724**
60966	31.9 to 32.9 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$338**
60968	41.8 to 49.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,888**
60969	52.8 to 54.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,134**
60970	58.7 to 68.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,238**
60971	71.1 to 80.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,968**
60972	85.3 to 87.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$918**

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **MALONE ST** **$22,207.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101410	WASHINGTON ST	MALONE ST	836 WASHINGTON ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
131845	4.0 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131846	9.8 to 14.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
131847	16.9 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
131844	25.2 to 26.2 feet	**Vertical Change**	.3"	5 ft	5	REF		
131848	26.0 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,380**
131849	36.3 to 44.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
131850	47.0 to 61.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**
131851	66.4 to 67.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
131852	71.8 to 73.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
131853	77.8 to 87.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **MALONE ST** **$29,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
SE	2202101445	WASHINGTON ST	WASHINGTON CT	301 WASHINGTON ST	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
132034	0.0 to 1.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,140**
132035	3.2 to 6.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
132036	9.7 to 15.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
132037	15.5 to 23.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
132038	35.3 to 37.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
132032	44.8 to 45.8 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
132039	49.8 to 79.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	147	SF	$120	**$17,640**
132033	62.2 to 63.2 feet	**Vertical Change**	.28"	5 ft	5	REF		

TOTAL COST FOR: SE *side of* **WASHINGTON ST** *Starting at:* **WASHINGTON CT** **$30,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201280958	WATT ST	CHESTNUT AVE	PECAN AVE	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111708	2.6 to 27.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
111709	27.9 to 40.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
111707	31.3 to 32.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
111710	45.8 to 47.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
111711	47.4 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
111712	52.2 to 55.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
111713	56.7 to 74.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,740**
111714	79.6 to 103.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
111715	106.8 to 115.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
111716	119.7 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
111717	125.3 to 131.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
111718	133.4 to 136.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
111719	136.6 to 143.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
111720	148.2 to 152.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
111721	152.8 to 168.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,600**

TOTAL COST FOR: W *side of* **WATT ST** *Starting at:* **CHESTNUT AVE** **$83,100.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201281009	WATT ST	PECAN AVE	CHESTNUT AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
111792	0.6 to 1.6 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
111793	5.7 to 6.7 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
111794	8.8 to 11.9 feet	Vertical Change	.32"	5 ft	15	REF		
111798	9.5 to 22.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
111795	14.3 to 15.3 feet	Vertical Change	.56"	5 ft	5	REF		
111796	16.6 to 17.6 feet	Vertical Change	.26"	5 ft	5	REF		
111799	24.6 to 42.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
111800	45.6 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
111801	58.6 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	441	SF	$120	**$52,920**
111802	151.7 to 155.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
111797	153.2 to 154.2 feet	Vertical Change	.42"	5 ft	5	REF		
111803	157.9 to 168.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**

TOTAL COST FOR: E *side of* **WATT ST** *Starting at:* **PECAN AVE** **$85,290.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211134	WAWONA CT	MONTEREY ST	MONTEREY ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79281	0.0 to 20.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
79296	20.5 to 39.7 feet	Key Note Segment		5 ft	96			
79282	41.0 to 54.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$8,040**
79297	54.4 to 74.5 feet	Key Note Segment		5 ft	101			
79283	74.8 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
79284	83.8 to 89.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
79270	119.4 to 120.4 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
79298	128.3 to 148.2 feet	Key Note Segment		5 ft	99			
79271	128.4 to 129.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
79285	148.9 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
79286	157.6 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
79287	172.8 to 177.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
79299	178.0 to 198.5 feet	Key Note Segment		5 ft	103			
79288	199.6 to 200.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
79289	200.9 to 226.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	127	SF	$120	**$15,180**
79272	213.2 to 214.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
79290	229.1 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,920**
79273	232.0 to 233.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
79274	236.7 to 237.7 feet	**Vertical Change**	-.42"	5 ft	5	REF		
79291	251.8 to 252.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
79300	255.6 to 276.3 feet	Key Note Segment		5 ft	104			
79292	278.6 to 290.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
79301	291.2 to 310.9 feet	Key Note Segment		5 ft	98			
79275	297.6 to 298.6 feet	**Vertical Change**	-.45"	5 ft	5	REF		
79276	300.1 to 301.1 feet	**Vertical Change**	2.92"	5 ft	5	REF		
79277	302.9 to 303.9 feet	**Vertical Change**	-.33"	5 ft	5	REF		
79293	311.6 to 315.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
79278	312.2 to 315.3 feet	**Vertical Change**	.56"	5 ft	16	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N/W/S	2110211134	WAWONA CT	MONTEREY ST	MONTEREY ST	48

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
79294	318.1 to 330.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	62	SF	$120	**$7,500**
79279	321.7 to 322.7 feet	**Vertical Change**	.89"	5 ft	5	REF		
79280	325.6 to 326.6 feet	**Vertical Change**	.41"	5 ft	5	REF		
79295	331.8 to 334.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**

TOTAL COST FOR: N/W/S *side of* **WAWONA CT** *Starting at:* **MONTEREY ST** **$78,915.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021351	WESSMITH WAY	721 WESSMITH WAY	AUSTIN AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118524	5.9 to 7.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	$912
118525	11.3 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	$1,200
118511	11.7 to 12.7 feet	Vertical Change	3.34"	4 ft	4	REF		
118526	15.3 to 26.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	46	SF	$120	$5,568
118544	27.3 to 39.9 feet	Key Note Segment		4 ft	50			
118512	28.0 to 29.0 feet	Vertical Change	-.75"	4 ft	4	REF		
118513	40.8 to 41.8 feet	Vertical Change	.34"	4 ft	4	REF		
118527	41.1 to 49.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	$3,984
118528	51.9 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	$3,264
118514	60.8 to 61.8 feet	Vertical Change	3.12"	4 ft	4	SF	$75	$300
118529	65.0 to 67.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	$1,344
118515	67.1 to 69.8 feet	Vertical Change	.46"	4 ft	11	REF		
118530	69.6 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	$528
118545	78.5 to 92.2 feet	Key Note Segment		4 ft	55			
118516	79.6 to 80.6 feet	Vertical Change	-.3"	4 ft	4	REF		
118531	92.3 to 93.5 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	5	SF	$40	$192
118517	92.6 to 93.6 feet	Vertical Change	.39"	4 ft	4	REF		
118518	110.7 to 111.7 feet	Vertical Change	.28"	4 ft	4	LF	$75	$300
118519	115.7 to 116.7 feet	Vertical Change	-.38"	4 ft	4	LF	$75	$300
118532	120.3 to 122.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	7	SF	$120	$816
118520	124.3 to 125.3 feet	Vertical Change	-.34"	4 ft	4	LF	$75	$300
118546	129.9 to 143.0 feet	Key Note Segment		4 ft	52			
118533	144.3 to 163.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	$9,264
118521	149.0 to 150.0 feet	Vertical Change	.26"	4 ft	4	REF		
118534	166.0 to 171.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	$2,448
118535	175.8 to 181.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	$2,592
118547	184.4 to 196.1 feet	Key Note Segment		4 ft	47			
118522	197.4 to 198.4 feet	Vertical Change	-.35"	4 ft	4	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021351	WESSMITH WAY	721 WESSMITH WAY	AUSTIN AVE	95

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118536	198.3 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	141	SF	$120	**$16,944**
118548	233.8 to 246.0 feet	Key Note Segment		4 ft	49			
118537	247.3 to 250.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,392**
118538	254.7 to 256.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
118523	258.2 to 259.2 feet	**Vertical Change**	1.06"	4 ft	4	SF	$75	**$300**
118549	259.0 to 270.8 feet	Key Note Segment		4 ft	47			
118539	271.4 to 272.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	4 ft	6	SF	$40	**$224**
118540	273.7 to 279.7 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	24	SF	$120	**$2,880**
118541	279.7 to 292.3 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	50	SF	$120	**$6,048**
118542	293.6 to 295.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$768**
118543	295.2 to 302.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	29	SF	$120	**$3,456**

TOTAL COST FOR: N *side of* **WESSMITH WAY** *Starting at:* **721 WESSMITH WAY** **$66,188.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021358	WESSMITH WAY	AUSTIN AVE	N LAKE ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118573	0.1 to 2.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
118620	28.4 to 41.3 feet	Key Note Segment		4 ft	52			
118550	29.7 to 30.7 feet	**Vertical Change**	.3"	4 ft	4	REF		
118574	42.4 to 54.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
118621	55.1 to 67.9 feet	Key Note Segment		4 ft	51			
118575	69.9 to 71.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
118551	73.1 to 74.1 feet	**Vertical Change**	.96"	4 ft	4	REF		
118576	73.4 to 86.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	52	SF	$120	**$6,288**
118552	82.8 to 83.8 feet	**Vertical Change**	1.85"	4 ft	4	REF		
118577	88.8 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,056**
118578	94.1 to 96.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
118622	108.1 to 120.8 feet	Key Note Segment		4 ft	51			
118579	137.0 to 145.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,224**
118580	150.7 to 158.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	**$3,840**
118623	158.7 to 171.5 feet	Key Note Segment		4 ft	51			
118553	159.1 to 160.1 feet	**Vertical Change**	.68"	4 ft	4	REF		
118554	171.9 to 172.9 feet	**Vertical Change**	.27"	4 ft	4	REF		
118581	173.3 to 199.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	104	SF	$120	**$12,432**
118582	199.2 to 202.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	13	SF	$120	**$1,536**
118583	206.5 to 210.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,064**
118624	211.7 to 224.6 feet	Key Note Segment		4 ft	52			
118584	224.6 to 240.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	64	SF	$40	**$2,576**
118555	244.6 to 245.6 feet	**Vertical Change**	.96"	4 ft	4	SF	$75	**$300**
118585	245.9 to 248.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
118556	249.5 to 250.5 feet	**Vertical Change**	-.28"	4 ft	4	LF	$75	**$300**
118586	251.3 to 255.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
118587	257.0 to 259.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
118625	261.8 to 275.1 feet	Key Note Segment		4 ft	53			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021358	WESSMITH WAY	AUSTIN AVE	N LAKE ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118588	277.2 to 284.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	28	SF	$120	**$3,360**
118589	284.2 to 292.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	35	SF	$120	**$4,176**
118590	293.8 to 297.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
118591	308.3 to 314.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
118626	314.0 to 327.8 feet	Key Note Segment		4 ft	55			
118592	328.7 to 330.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
118593	333.3 to 337.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
118594	340.9 to 343.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,296**
118557	346.6 to 347.6 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
118558	360.9 to 361.9 feet	**Vertical Change**	.47"	4 ft	4	LF	$75	**$300**
118627	365.4 to 377.9 feet	Key Note Segment		4 ft	50			
118559	366.0 to 367.0 feet	**Vertical Change**	-.26"	4 ft	4	REF		
118595	379.2 to 380.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$720**
118596	383.3 to 397.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	58	SF	$120	**$6,960**
118597	398.0 to 405.6 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	30	SF	$120	**$3,648**
118560	398.8 to 399.8 feet	**Vertical Change**	.27"	4 ft	4	REF		
118561	402.2 to 403.2 feet	**Vertical Change**	.3"	4 ft	4	REF		
118635	403.9 to 404.9 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
118562	407.5 to 408.5 feet	**Vertical Change**	.32"	4 ft	4	LF	$75	**$300**
118598	409.2 to 410.9 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	7	SF	$120	**$816**
118599	411.9 to 413.3 feet	Cross Slope (PAR)	9.0-10.0%	4 ft	6	SF	$120	**$672**
118563	414.2 to 415.2 feet	**Vertical Change**	-.26"	4 ft	4	LF	$75	**$300**
118628	418.3 to 430.8 feet	Key Note Segment		4 ft	50			
118564	419.1 to 420.1 feet	**Vertical Change**	-.31"	4 ft	4	REF		
118565	421.0 to 422.0 feet	**Vertical Change**	.35"	4 ft	4	REF		
118600	432.2 to 468.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	146	SF	$120	**$17,568**
118629	468.8 to 481.8 feet	Key Note Segment		4 ft	52			
118601	481.8 to 487.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	22	SF	$40	**$880**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021358	WESSMITH WAY	AUSTIN AVE	N LAKE ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118602	489.6 to 510.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	84	SF	$120	**$10,128**
118603	510.7 to 521.2 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$5,040**
118630	522.3 to 535.4 feet	Key Note Segment		4 ft	52			
118604	537.4 to 547.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	40	SF	$120	**$4,800**
118605	548.6 to 565.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	66	SF	$120	**$7,920**
118606	567.3 to 568.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$528**
118607	568.4 to 570.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,152**
118631	572.1 to 584.9 feet	Key Note Segment		4 ft	51			
118567	585.8 to 586.8 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
118608	588.9 to 590.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
118609	611.3 to 622.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	45	SF	$120	**$5,424**
118632	623.9 to 637.7 feet	Key Note Segment		4 ft	55			
118568	625.0 to 626.0 feet	**Vertical Change**	.42"	4 ft	4	REF		
118569	638.2 to 639.2 feet	**Vertical Change**	-.32"	4 ft	4	REF		
118610	655.1 to 658.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
118611	662.4 to 668.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,784**
118633	678.2 to 691.6 feet	Key Note Segment		4 ft	54			
118612	695.8 to 698.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
118570	711.6 to 712.6 feet	**Vertical Change**	-.48"	4 ft	4	LF	$75	**$300**
118613	715.3 to 723.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,080**
118614	726.1 to 728.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
118615	732.8 to 740.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
118571	736.0 to 737.0 feet	**Vertical Change**	.38"	4 ft	4	REF		
118572	738.8 to 739.8 feet	**Vertical Change**	1.38"	4 ft	4	REF		
118634	740.6 to 754.2 feet	Key Note Segment		4 ft	54			
118616	754.2 to 762.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	34	SF	$40	**$1,376**
118617	763.3 to 769.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$3,024**
118618	774.4 to 782.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202021358	WESSMITH WAY	AUSTIN AVE	N LAKE ST	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118619	786.8 to 788.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**

TOTAL COST FOR: S *side of* **WESSMITH WAY** *Starting at:* **AUSTIN AVE** **$155,312.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202091119	WESSMITH WAY	BARCELONA WAY	FOUNTAIN WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128535	0.0 to 5.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	22	SF	$120	**$2,688**
128526	2.4 to 3.4 feet	Vertical Change	.26"	4 ft	4	REF		
128536	6.1 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,544**
128537	14.4 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	60	SF	$120	**$7,152**
128538	31.7 to 46.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	58	SF	$120	**$6,960**
128527	34.9 to 35.9 feet	Vertical Change	2.93"	4 ft	4	REF		
128539	51.0 to 56.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	23	SF	$120	**$2,736**
128540	59.1 to 70.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**
128541	72.8 to 73.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
128528	83.3 to 84.3 feet	Vertical Change	3.44"	4 ft	4	SF	$75	**$300**
128548	83.8 to 84.8 feet		5.0-6.0%	4 ft	4			
128529	86.3 to 87.3 feet	Vertical Change	.31"	4 ft	4	LF	$75	**$300**
128542	88.2 to 100.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	50	SF	$120	**$6,000**
128530	92.6 to 93.6 feet	Vertical Change	3.05"	4 ft	4	REF		
128531	98.2 to 101.2 feet	Vertical Change	.26"	4 ft	12	REF		
128543	100.7 to 112.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	47	SF	$120	**$5,664**
128532	114.1 to 115.1 feet	Vertical Change	-.57"	4 ft	4	SF	$75	**$300**
128533	121.5 to 122.5 feet	Vertical Change	1.69"	4 ft	4	SF	$75	**$300**
128544	125.4 to 128.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
128545	128.4 to 129.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
128534	139.7 to 140.7 feet	Vertical Change	3.42"	4 ft	4	SF	$75	**$300**
128546	143.8 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
128547	157.8 to 159.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**

TOTAL COST FOR: N *side of* **WESSMITH WAY** *Starting at:* **BARCELONA WAY** **$45,948.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081616	WESSMITH WAY	FOUNTAIN WAY	TULARE ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127962	4.3 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
127931	13.6 to 14.6 feet	**Vertical Change**	.57"	4 ft	4	SF	$75	**$300**
127963	25.6 to 27.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$864**
128025	30.0 to 44.2 feet	Key Note Segment		4 ft	57			
127964	44.2 to 48.4 feet	**Cross Slope (Driveway)**	5.0-6.0%	4 ft	17	SF	$40	**$672**
127965	52.2 to 56.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,160**
128026	56.7 to 70.5 feet	Key Note Segment		4 ft	55			
127966	70.6 to 71.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
127932	75.1 to 76.1 feet	**Vertical Change**	.64"	4 ft	4	REF		
127967	75.9 to 79.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
127968	102.3 to 105.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,440**
127969	110.8 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,120**
127933	113.7 to 114.7 feet	**Vertical Change**	1"	4 ft	4	REF		
127970	127.0 to 131.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	18	SF	$120	**$2,112**
127934	128.8 to 129.8 feet	**Vertical Change**	-.32"	4 ft	4	REF		
127971	132.4 to 136.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	18	SF	$120	**$2,112**
128027	137.5 to 151.3 feet	Key Note Segment		4 ft	55			
127935	151.5 to 152.5 feet	**Vertical Change**	.87"	4 ft	4	REF		
127972	151.6 to 163.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	46	SF	$120	**$5,520**
128028	163.7 to 177.8 feet	Key Note Segment		4 ft	56			
127973	178.2 to 198.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	80	SF	$40	**$3,216**
127974	202.8 to 207.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,304**
127975	207.8 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,608**
128029	217.4 to 231.7 feet	Key Note Segment		4 ft	57			
127976	234.3 to 247.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	52	SF	$120	**$6,240**
127977	252.4 to 257.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,400**
127978	261.9 to 269.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,696**
127979	276.2 to 277.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	6	SF	$120	**$720**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081616	WESSMITH WAY	FOUNTAIN WAY	TULARE ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127980	279.1 to 297.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$9,024**
128030	297.9 to 311.7 feet	Key Note Segment		4 ft	55			
127936	312.8 to 313.8 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
127981	316.1 to 322.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	25	SF	$120	**$2,976**
128031	324.6 to 338.2 feet	Key Note Segment		4 ft	54			
127938	339.0 to 340.0 feet	**Vertical Change**	.26"	4 ft	4	REF		
127982	339.6 to 346.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,072**
127983	346.3 to 357.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	45	SF	$120	**$5,376**
127939	356.1 to 357.1 feet	**Vertical Change**	.33"	4 ft	4	REF		
127984	357.5 to 376.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$9,024**
127985	387.8 to 399.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
127986	400.5 to 404.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	15	SF	$120	**$1,824**
128032	405.6 to 419.6 feet	Key Note Segment		4 ft	56			
127987	419.9 to 429.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	38	SF	$40	**$1,536**
127988	429.5 to 430.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	4	SF	$120	**$480**
128033	432.3 to 445.7 feet	Key Note Segment		4 ft	54			
127940	453.0 to 454.0 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
127989	457.5 to 461.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,824**
127941	459.6 to 460.6 feet	**Vertical Change**	-.26"	4 ft	4	REF		
127990	463.8 to 466.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,152**
127991	466.2 to 467.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
127942	468.2 to 469.2 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
127992	494.3 to 513.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$8,976**
128034	513.0 to 526.8 feet	Key Note Segment		4 ft	55			
127943	514.7 to 515.7 feet	**Vertical Change**	1.16"	4 ft	4	REF		
127993	526.8 to 538.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	48	SF	$40	**$1,904**
127944	527.7 to 528.7 feet	**Vertical Change**	.31"	4 ft	4	REF		
128035	538.7 to 552.1 feet	Key Note Segment		4 ft	54			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081616	WESSMITH WAY	FOUNTAIN WAY	TULARE ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127994	552.8 to 553.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
127945	553.4 to 554.4 feet	**Vertical Change**	.33"	4 ft	4	REF		
127995	558.2 to 572.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	58	SF	$120	**$7,008**
127946	567.2 to 568.2 feet	**Vertical Change**	.53"	4 ft	4	REF		
127996	584.6 to 603.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	75	SF	$120	**$8,976**
127997	603.3 to 608.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
127998	610.3 to 612.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
127999	612.3 to 618.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	24	SF	$120	**$2,880**
128036	618.3 to 632.8 feet	Key Note Segment		4 ft	58			
127948	621.1 to 622.1 feet	**Vertical Change**	3.25"	4 ft	4	REF		
128000	633.5 to 635.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	9	SF	$120	**$1,104**
127949	633.6 to 634.6 feet	**Vertical Change**	.48"	4 ft	4	REF		
128001	637.1 to 638.5 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	6	SF	$120	**$672**
127950	640.3 to 641.3 feet	**Vertical Change**	-.36"	4 ft	4	REF		
128002	640.6 to 645.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	19	SF	$120	**$2,256**
128037	645.3 to 660.0 feet	Key Note Segment		4 ft	59			
128003	660.6 to 673.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	50	SF	$120	**$5,952**
127951	668.1 to 669.1 feet	**Vertical Change**	-.47"	4 ft	4	REF		
127952	673.7 to 674.7 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
128004	678.9 to 680.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$960**
128005	689.2 to 691.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
127953	694.4 to 695.4 feet	**Vertical Change**	3.14"	4 ft	4	SF	$75	**$300**
127954	719.0 to 720.0 feet	**Vertical Change**	-.52"	4 ft	4	REF		
128006	719.9 to 726.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	28	SF	$120	**$3,360**
128038	726.9 to 740.5 feet	Key Note Segment		4 ft	54			
128007	740.9 to 747.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
128008	747.6 to 750.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	11	SF	$120	**$1,296**
128039	753.1 to 768.8 feet	Key Note Segment		4 ft	63			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081616	WESSMITH WAY	FOUNTAIN WAY	TULARE ST	85

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128009	771.2 to 782.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
128010	785.3 to 786.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
128011	790.4 to 793.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
128012	802.1 to 830.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	112	SF	$120	**$13,488**
128040	834.3 to 847.8 feet	Key Note Segment		4 ft	54			
127956	841.2 to 842.2 feet	**Vertical Change**	1.33"	4 ft	4	REF		
128013	847.8 to 850.3 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	10	SF	$40	**$400**
127957	849.0 to 850.0 feet	**Vertical Change**	.32"	4 ft	4	REF		
128014	852.7 to 858.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	24	SF	$120	**$2,928**
128043	854.3 to 855.3 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**
128041	860.7 to 874.8 feet	Key Note Segment		4 ft	56			
128015	874.8 to 877.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	10	SF	$40	**$416**
128016	877.6 to 878.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
128017	881.8 to 887.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	24	SF	$120	**$2,832**
128018	894.8 to 904.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	38	SF	$120	**$4,560**
127958	911.4 to 912.4 feet	**Vertical Change**	.31"	4 ft	4	LF	$75	**$300**
128019	923.5 to 933.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$4,992**
127959	934.8 to 935.8 feet	**Vertical Change**	.97"	4 ft	4	SF	$75	**$300**
128020	936.5 to 941.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,592**
127960	948.8 to 949.8 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
128021	951.7 to 954.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
128022	959.4 to 961.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
128023	974.9 to 977.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
128024	978.2 to 983.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
128042	980.6 to 981.8 feet		5.0-6.0%	4 ft	5			
127961	980.8 to 981.8 feet	**Vertical Change**	.34"	4 ft	4	REF		

TOTAL COST FOR: N *side of* **WESSMITH WAY** *Starting at:* **FOUNTAIN WAY** **$190,652.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202091122	WESSMITH WAY	FOUNTAIN WAY	BARCELONA WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128549	6.2 to 9.6 feet	Vertical Change	.28"	5 ft	17	LF	$75	$1,275
128558	16.8 to 24.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	$4,740
128550	25.5 to 26.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
128551	29.1 to 30.1 feet	Vertical Change	-1.14"	5 ft	5	REF		
128559	29.9 to 33.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,100
128571	31.6 to 32.8 feet		8.0-9.0%	5 ft	6			
128552	42.9 to 43.9 feet	Vertical Change	1.03"	5 ft	5	SF	$75	$375
128554	52.1 to 53.1 feet	Vertical Change	.59"	5 ft	5	SF	$75	$375
128555	54.3 to 58.2 feet	Vertical Change	.29"	5 ft	20	LF	$75	$1,463
128556	60.6 to 61.6 feet	Vertical Change	-.45"	5 ft	5	LF	$75	$375
128560	63.3 to 66.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
128561	69.3 to 70.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
128562	71.0 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	$2,820
128563	79.4 to 81.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	$1,080
128564	83.3 to 84.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
128557	88.6 to 89.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
128565	91.8 to 100.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	$5,400
128566	117.8 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	$5,880
128567	132.7 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
128568	138.8 to 145.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	$3,840
128569	147.1 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	$4,020
128570	157.3 to 164.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	$4,320

TOTAL COST FOR: S *side of* **WESSMITH WAY** *Starting at:* **FOUNTAIN WAY** **$43,732.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021347	WESSMITH WAY	N LAKE ST	725 WESSMITH WAY	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118489	1.2 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
118490	8.2 to 11.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
118472	9.4 to 10.4 feet	**Vertical Change**	.27"	4 ft	4	REF		
118473	15.8 to 16.8 feet	**Vertical Change**	-.32"	4 ft	4	LF	$75	**$300**
118502	31.5 to 43.9 feet	Key Note Segment		4 ft	50			
118491	43.9 to 46.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$336**
118474	50.0 to 51.0 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
118475	76.9 to 77.9 feet	**Vertical Change**	.49"	4 ft	4	LF	$75	**$300**
118503	91.0 to 104.0 feet	Key Note Segment		4 ft	52			
118476	127.6 to 128.6 feet	**Vertical Change**	.58"	4 ft	4	SF	$75	**$300**
118477	132.0 to 133.0 feet	**Vertical Change**	-.41"	4 ft	4	LF	$75	**$300**
118504	151.3 to 162.5 feet	Key Note Segment		4 ft	45			
118478	151.6 to 152.6 feet	**Vertical Change**	-.27"	4 ft	4	REF		
118479	157.8 to 158.8 feet	**Vertical Change**	.89"	4 ft	4	REF		
118492	162.8 to 164.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	5	SF	$120	**$624**
118493	164.4 to 165.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**
118510	168.6 to 169.6 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
118480	205.9 to 206.9 feet	**Vertical Change**	.33"	4 ft	4	LF	$75	**$300**
118505	206.9 to 219.4 feet	Key Note Segment		4 ft	50			
118481	220.1 to 221.1 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
118482	230.2 to 231.2 feet	**Vertical Change**	.33"	4 ft	4	LF	$75	**$300**
118483	240.0 to 241.0 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
118506	256.0 to 269.3 feet	Key Note Segment		4 ft	53			
118494	271.3 to 302.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	126	SF	$120	**$15,120**
118484	304.6 to 305.6 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
118507	310.5 to 322.5 feet	Key Note Segment		4 ft	48			
118485	311.1 to 312.1 feet	**Vertical Change**	.44"	4 ft	4	REF		
118495	342.1 to 359.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	68	SF	$120	**$8,112**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202021347	WESSMITH WAY	N LAKE ST	725 WESSMITH WAY	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
118486	342.7 to 343.7 feet	Vertical Change	-.71"	4 ft	4	REF		
118508	359.0 to 374.6 feet	Key Note Segment		4 ft	62			
118487	371.8 to 372.8 feet	Vertical Change	-.33"	4 ft	4	REF		
118488	395.4 to 396.4 feet	Vertical Change	.27"	4 ft	4	LF	$75	**$300**
118496	398.4 to 400.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	7	SF	$120	**$816**
118497	409.9 to 413.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,680**
118509	413.7 to 425.3 feet	Key Note Segment		4 ft	46			
118498	425.3 to 428.3 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	12	SF	$40	**$480**
118499	431.1 to 447.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	66	SF	$120	**$7,968**
118500	452.3 to 455.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
118501	462.8 to 464.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$672**

TOTAL COST FOR: N *side of* **WESSMITH WAY** *Starting at:* **N LAKE ST** **$45,303.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081608	WESSMITH WAY	TULARE ST	FOUNTAIN WAY	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127844	0.2 to 6.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	26	SF	$120	**$3,168**
127845	8.3 to 19.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
127807	16.1 to 17.1 feet	**Vertical Change**	.72"	4 ft	4	REF		
127846	25.9 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,632**
127910	29.3 to 42.6 feet	Key Note Segment		4 ft	53			
127808	29.8 to 30.8 feet	**Vertical Change**	.32"	4 ft	4	REF		
127847	44.3 to 47.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
127809	50.0 to 51.0 feet	**Vertical Change**	.57"	4 ft	4	SF	$75	**$300**
127848	52.0 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,824**
127928	53.4 to 54.4 feet	**Protruding Object**	72"	4 ft	4	JOB	$99	**$99**
127849	59.1 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
127929	64.6 to 65.6 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
127810	67.2 to 68.2 feet	**Vertical Change**	-.66"	4 ft	4	SF	$75	**$300**
127850	70.8 to 82.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	47	SF	$120	**$5,616**
127851	83.4 to 85.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
127811	85.8 to 86.8 feet	**Vertical Change**	.26"	4 ft	4	REF		
127911	86.4 to 99.6 feet	Key Note Segment		4 ft	53			
127852	99.8 to 101.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	6	SF	$40	**$256**
127853	101.4 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
127854	105.3 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	56	SF	$120	**$6,720**
127855	121.4 to 140.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	75	SF	$120	**$8,976**
127912	140.3 to 153.8 feet	Key Note Segment		4 ft	54			
127856	154.6 to 158.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
127812	155.1 to 156.1 feet	**Vertical Change**	.26"	4 ft	4	REF		
127857	163.3 to 166.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	14	SF	$120	**$1,680**
127913	166.8 to 180.3 feet	Key Note Segment		4 ft	54			
127858	180.8 to 189.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
127859	199.5 to 202.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081608	WESSMITH WAY	TULARE ST	FOUNTAIN WAY	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127813	200.3 to 201.3 feet	Vertical Change	.34"	4 ft	4	REF		
127860	209.2 to 211.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$912**
127814	214.4 to 215.4 feet	Vertical Change	.28"	4 ft	4	REF		
127861	214.9 to 225.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	43	SF	$120	**$5,136**
127862	225.6 to 230.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	21	SF	$120	**$2,496**
127863	234.2 to 243.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	38	SF	$120	**$4,608**
127864	246.3 to 249.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
127914	250.1 to 264.6 feet	Key Note Segment		4 ft	58			
127865	265.0 to 266.1 feet	Cross Slope (Driveway)	6.0-7.0%	4 ft	4	SF	$40	**$176**
127866	267.3 to 276.5 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	37	SF	$120	**$4,416**
127915	277.5 to 291.6 feet	Key Note Segment		4 ft	56			
127867	291.6 to 297.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	25	SF	$40	**$992**
127868	302.0 to 345.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	174	SF	$120	**$20,880**
127815	328.3 to 329.3 feet	Vertical Change	-.4"	4 ft	4	REF		
127816	343.3 to 344.3 feet	Vertical Change	-.28"	4 ft	4	REF		
127869	345.8 to 346.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
127870	349.6 to 361.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	48	SF	$120	**$5,760**
127916	361.6 to 375.4 feet	Key Note Segment		4 ft	55			
127871	375.7 to 379.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,920**
127872	381.9 to 387.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	22	SF	$120	**$2,640**
127917	388.1 to 401.8 feet	Key Note Segment		4 ft	55			
127817	402.8 to 403.8 feet	Vertical Change	.76"	4 ft	4	SF	$75	**$300**
127818	405.6 to 406.6 feet	Vertical Change	2.89"	4 ft	4	SF	$75	**$300**
127819	413.6 to 414.6 feet	Vertical Change	1.65"	4 ft	4	SF	$75	**$300**
127873	414.9 to 417.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
127874	421.8 to 429.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
127820	426.1 to 427.1 feet	Vertical Change	1.63"	4 ft	4	REF		
127875	431.6 to 433.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081608	WESSMITH WAY	TULARE ST	FOUNTAIN WAY	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127876	434.8 to 459.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	99	SF	$120	**$11,904**
127877	463.2 to 471.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
127918	472.1 to 485.6 feet	Key Note Segment		4 ft	54			
127821	475.6 to 476.6 feet	**Vertical Change**	2.71"	4 ft	4	REF		
127878	485.8 to 497.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	48	SF	$40	**$1,920**
127919	498.4 to 511.3 feet	Key Note Segment		4 ft	52			
127879	511.7 to 521.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	39	SF	$120	**$4,704**
127880	521.5 to 528.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
127881	528.7 to 544.9 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	65	SF	$120	**$7,776**
127882	546.3 to 547.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
127822	549.7 to 550.7 feet	**Vertical Change**	1.13"	4 ft	4	SF	$75	**$300**
127883	561.1 to 562.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
127884	574.6 to 581.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	27	SF	$120	**$3,216**
127920	581.3 to 595.4 feet	Key Note Segment		4 ft	56			
127885	597.3 to 608.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
127921	608.9 to 621.6 feet	Key Note Segment		4 ft	51			
127886	621.6 to 622.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	4 ft	5	SF	$40	**$192**
127823	622.8 to 623.8 feet	**Vertical Change**	.44"	4 ft	4	REF		
127887	623.8 to 635.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
127888	637.7 to 640.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
127824	638.6 to 639.6 feet	**Vertical Change**	.29"	4 ft	4	REF		
127889	643.4 to 647.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,872**
127825	648.9 to 649.9 feet	**Vertical Change**	.79"	4 ft	4	SF	$75	**$300**
127826	655.9 to 656.9 feet	**Vertical Change**	.3"	4 ft	4	LF	$75	**$300**
127827	662.1 to 663.1 feet	**Vertical Change**	.29"	4 ft	4	LF	$75	**$300**
127828	669.9 to 670.9 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
127890	675.9 to 690.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	57	SF	$120	**$6,864**
127922	692.8 to 706.7 feet	Key Note Segment		4 ft	56			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081608	WESSMITH WAY	TULARE ST	FOUNTAIN WAY	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127829	693.7 to 694.7 feet	Vertical Change	-.31"	4 ft	4	REF		
127891	706.8 to 716.6 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	39	SF	$40	**$1,568**
127830	707.8 to 708.8 feet	Vertical Change	.93"	4 ft	4	REF		
127831	710.0 to 711.0 feet	Vertical Change	.27"	4 ft	4	REF		
127892	718.0 to 719.2 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	5	SF	$120	**$576**
127923	719.2 to 732.7 feet	Key Note Segment		4 ft	54			
127893	733.5 to 735.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	9	SF	$120	**$1,056**
127894	737.8 to 748.7 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	44	SF	$120	**$5,232**
127895	749.3 to 760.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
127930	749.3 to 750.3 feet	Continuous Width	36"	4 ft	4	SF	$120	**$480**
127832	750.3 to 751.3 feet	Vertical Change	2.82"	4 ft	4	REF		
127896	763.8 to 783.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	80	SF	$120	**$9,600**
127833	771.3 to 772.3 feet	Vertical Change	1.44"	4 ft	4	REF		
127897	785.3 to 804.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	75	SF	$120	**$8,976**
127834	786.1 to 787.1 feet	Vertical Change	2.54"	4 ft	4	REF		
127835	796.8 to 797.8 feet	Vertical Change	.33"	4 ft	4	REF		
127924	804.0 to 817.3 feet	Key Note Segment		4 ft	53			
127898	817.4 to 818.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	6	SF	$40	**$224**
127836	818.3 to 819.3 feet	Vertical Change	.29"	4 ft	4	REF		
127899	821.3 to 829.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,128**
127925	829.9 to 843.9 feet	Key Note Segment		4 ft	56			
127837	841.2 to 842.2 feet	Vertical Change	-.28"	4 ft	4	REF		
127900	843.9 to 851.2 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	29	SF	$40	**$1,168**
127838	847.1 to 848.1 feet	Vertical Change	.41"	4 ft	4	REF		
127901	851.3 to 852.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
127839	867.6 to 868.6 feet	Vertical Change	2.8"	4 ft	4	SF	$75	**$300**
127840	872.0 to 873.0 feet	Vertical Change	2.73"	4 ft	4	REF		
127902	872.8 to 873.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081608	WESSMITH WAY	TULARE ST	FOUNTAIN WAY	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
127903	876.5 to 877.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$624**
127904	882.8 to 896.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	53	SF	$120	**$6,336**
127841	891.5 to 892.5 feet	**Vertical Change**	.56"	4 ft	4	REF		
127842	902.3 to 903.3 feet	**Vertical Change**	.28"	4 ft	4	LF	$75	**$300**
127905	905.0 to 914.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,320**
127926	914.3 to 927.4 feet	Key Note Segment		4 ft	52			
127906	927.8 to 931.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,920**
127907	932.1 to 939.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
127927	939.9 to 953.8 feet	Key Note Segment		4 ft	56			
127908	954.0 to 955.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	4	SF	$40	**$176**
127909	958.8 to 986.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	110	SF	$120	**$13,200**
127843	973.9 to 974.9 feet	**Vertical Change**	2.2"	4 ft	4	REF		

TOTAL COST FOR: S *side of* **WESSMITH WAY** *Starting at:* **TULARE ST** **$237,222.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151641	WESTBERRY BLVD	REN WAY	258 WESTBERRY BLVD	63

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84964	0.3 to 2.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
84965	3.1 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
84966	15.0 to 22.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
84960	17.5 to 18.5 feet	**Vertical Change**	-.35"	5 ft	5	REF		
84967	28.3 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
84961	38.8 to 39.8 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
84968	40.0 to 41.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
84969	44.2 to 46.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
84970	47.5 to 50.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84962	47.8 to 48.8 feet	**Vertical Change**	.42"	5 ft	5	REF		
84971	50.8 to 59.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
84963	60.8 to 61.8 feet	**Vertical Change**	.85"	5 ft	5	SF	$75	**$375**
84972	65.6 to 66.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84973	69.4 to 72.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,860**
84974	69.5 to 72.4 feet		6.0-7.0%	5 ft	15			

TOTAL COST FOR: W *side of* **WESTBERRY BLVD** *Starting at:* **REN WAY** **$24,750.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261146	WESTBERRY BVD	3245 HAMPTON DR	HOLLOW AVE	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108714	0.4 to 57.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	283	SF	$120	**$33,960**
108708	20.7 to 21.7 feet	**Vertical Change**	1.47"	5 ft	5	REF		
108715	57.9 to 84.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	133	SF	$120	**$15,960**
108709	92.9 to 93.9 feet	**Vertical Change**	.7"	5 ft	5	SF	$75	**$375**
108716	95.6 to 96.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108717	100.2 to 116.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
108710	106.6 to 107.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
108718	118.6 to 130.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,020**
108719	133.3 to 140.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
108720	140.8 to 169.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	144	SF	$120	**$17,280**
108721	170.5 to 187.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	85	SF	$120	**$10,140**
108712	178.6 to 179.6 feet	**Vertical Change**	.4"	5 ft	5	REF		
108722	189.8 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
108723	200.7 to 209.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	46	SF	$120	**$5,520**
108724	211.0 to 213.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
108713	213.6 to 214.6 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **3245 HAMPTON DR** **$110,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161215	WESTBERRY BVD	3290 SUNSET AVE	SUNSET AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86351	2.2 to 3.2 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
86354	10.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
86355	19.6 to 24.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
86356	31.0 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
86352	34.9 to 35.9 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
86357	58.5 to 61.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
86353	97.9 to 98.9 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
86358	114.1 to 128.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
86359	131.5 to 139.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,620**
86361	139.2 to 161.5 feet	Key Note Segment		5 ft	112			
86360	161.9 to 178.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	85	SF	$40	**$3,380**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **3290 SUNSET AVE** **$25,025.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161213	WESTBERRY BVD	500 N WESTBERRY BVD	500 N WESTBERRY BVD	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86345	0.8 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**
86346	7.3 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86347	11.6 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
86348	26.5 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
86349	40.3 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86350	42.3 to 43.9 feet		6.0-7.0%	5 ft	8			

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **500 N WESTBERRY BVD** **$14,580.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151307	WESTBERRY BVD	AVE 14	REN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82309	0.0 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
82310	9.8 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
82311	13.3 to 15.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
82312	16.9 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
82313	26.4 to 28.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
82314	31.2 to 34.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
82315	39.6 to 43.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
82316	46.3 to 47.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
82317	50.8 to 52.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82318	52.4 to 59.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
82337	58.3 to 59.4 feet		5.0-6.0%	5 ft	6			
82319	59.5 to 78.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	93	SF	$120	**$11,160**
82320	79.3 to 95.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	81	SF	$120	**$9,660**
82321	97.9 to 102.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,520**
82322	104.8 to 117.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,620**
82323	117.5 to 118.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
82324	121.4 to 122.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
82325	127.3 to 129.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
82326	131.5 to 132.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
82299	135.8 to 136.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
82300	138.4 to 139.4 feet	**Vertical Change**	3.4"	5 ft	5	SF	$75	**$375**
82327	141.2 to 142.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
82328	144.7 to 146.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
82329	150.2 to 151.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
82301	152.6 to 153.6 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**
82330	153.8 to 163.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
82302	158.6 to 159.6 feet	**Vertical Change**	3.47"	5 ft	5	REF		
82303	164.0 to 165.0 feet	**Vertical Change**	2.21"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151307	WESTBERRY BVD	AVE 14	REN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82331	168.3 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
82332	179.4 to 180.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
82333	180.8 to 186.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
82304	182.0 to 183.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
82305	192.9 to 193.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
82306	195.2 to 196.2 feet	**Vertical Change**	3.55"	5 ft	5	REF		
82334	196.1 to 201.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
82307	199.2 to 200.2 feet	**Vertical Change**	.53"	5 ft	5	REF		
82335	202.3 to 204.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
82336	207.5 to 213.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
82338	211.3 to 213.5 feet		5.0-6.0%	5 ft	11			
82339	211.3 to 213.5 feet	Running Slope	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
82308	213.8 to 214.8 feet	**Vertical Change**	3.42"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **AVE 14** **$86,070.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161402	WESTBERRY BVD	BARON ST	SUNSET AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86848	1.1 to 2.1 feet	Vertical Change	.36"	5 ft	5	REF		
86862	1.3 to 4.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	$1,800
86863	5.2 to 7.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
86849	5.6 to 6.6 feet	Vertical Change	.3"	5 ft	5	REF		
86850	10.1 to 11.1 feet	Vertical Change	.46"	5 ft	5	LF	$75	$375
86864	12.7 to 13.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
86851	13.2 to 14.2 feet	Vertical Change	3.5"	5 ft	5	REF		
86852	15.5 to 19.2 feet	Vertical Change	.3"	5 ft	19	REF		
86865	15.7 to 19.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
86853	23.0 to 24.0 feet	Vertical Change	.33"	5 ft	5	LF	$75	$375
86872	23.3 to 24.5 feet		5.0-6.0%	5 ft	6			
86854	27.8 to 28.8 feet	Vertical Change	.62"	5 ft	5	SF	$75	$375
86855	30.3 to 33.9 feet	Vertical Change	.3"	5 ft	18	LF	$75	$1,350
86866	35.8 to 42.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	$3,900
86856	38.1 to 39.1 feet	Vertical Change	.26"	5 ft	5	REF		
86857	43.1 to 48.7 feet	Vertical Change	.34"	5 ft	28	LF	$75	$2,100
86858	58.9 to 59.9 feet	Vertical Change	-.4"	5 ft	5	LF	$75	$375
86859	62.3 to 65.6 feet	Vertical Change	.32"	5 ft	16	LF	$75	$1,238
86867	67.8 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
86860	67.9 to 68.9 feet	Vertical Change	-.3"	5 ft	5	REF		
86868	74.3 to 76.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
86861	76.1 to 77.1 feet	Vertical Change	3.49"	5 ft	5	REF		
86869	79.1 to 91.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	63	SF	$120	$7,500
86870	94.8 to 109.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	$8,580
86871	109.1 to 111.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,320
86873	109.9 to 111.0 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **BARON ST** **$35,647.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151543	WESTBERRY BVD	CAMBRIA AVE	WESTGATE DR	69

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84078	7.9 to 9.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
84070	10.3 to 11.3 feet	Vertical Change	-.45"	5 ft	5	LF	$75	**$375**
84079	22.7 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84071	31.7 to 32.7 feet	Vertical Change	1.06"	5 ft	5	SF	$75	**$375**
84072	41.8 to 45.2 feet	Vertical Change	.33"	5 ft	17	LF	$75	**$1,275**
84073	46.4 to 47.4 feet	Vertical Change	.61"	5 ft	5	REF		
84080	46.7 to 48.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84074	60.5 to 61.5 feet	Vertical Change	.29"	5 ft	5	LF	$75	**$375**
84081	64.1 to 66.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
84075	73.4 to 74.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
84082	76.2 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
84076	83.0 to 84.0 feet	Vertical Change	.4"	5 ft	5	LF	$75	**$375**
84083	87.7 to 92.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
84084	96.8 to 97.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84085	100.8 to 107.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
84086	109.0 to 110.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
84087	112.1 to 116.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
84088	121.5 to 126.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
84077	123.6 to 124.6 feet	Vertical Change	.33"	5 ft	5	REF		
84089	128.3 to 129.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
84090	131.9 to 140.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
84091	146.1 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
84092	159.7 to 169.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
84093	174.6 to 175.8 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **CAMBRIA AVE** **$41,670.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261204	WESTBERRY BVD	COMMON WAY	W CLEVELAND AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108864	0.8 to 8.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
108865	13.1 to 14.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
108866	16.6 to 30.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,220**
108854	30.0 to 31.0 feet	Vertical Change	.34"	5 ft	5	REF		
108867	30.9 to 40.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	49	SF	$120	**$5,880**
108868	40.7 to 50.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,820**
108869	50.6 to 51.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
108870	51.7 to 56.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
108855	56.5 to 57.5 feet	Vertical Change	.83"	5 ft	5	SF	$75	**$375**
108871	59.3 to 70.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,780**
108856	67.8 to 68.8 feet	Vertical Change	-.4"	5 ft	5	REF		
108872	71.9 to 119.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	237	SF	$120	**$28,500**
108873	121.6 to 123.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
108874	131.9 to 145.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
108875	149.0 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
108857	156.2 to 157.2 feet	Vertical Change	.66"	5 ft	5	REF		
108876	161.4 to 165.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
108858	162.9 to 163.9 feet	Vertical Change	.73"	5 ft	5	REF		
108877	166.4 to 172.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
108878	172.8 to 182.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
108859	184.3 to 185.3 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
108860	188.7 to 191.6 feet	Vertical Change	-.33"	5 ft	15	LF	$75	**$1,088**
108879	191.9 to 207.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,060**
108861	201.3 to 202.3 feet	Vertical Change	-.27"	5 ft	5	REF		
108880	209.3 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
108862	211.1 to 212.1 feet	Vertical Change	.74"	5 ft	5	SF	$75	**$375**
108881	224.8 to 226.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
108882	227.9 to 235.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261204	WESTBERRY BVD	COMMON WAY	W CLEVELAND AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108883	235.4 to 236.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
108884	236.8 to 250.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
108892	240.3 to 241.3 feet		5.0-6.0%	5 ft	5			
108893	241.3 to 243.7 feet		6.0-7.0%	5 ft	12			
108885	250.7 to 254.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
108886	258.0 to 262.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
108863	258.9 to 259.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
108887	263.1 to 265.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
108888	272.6 to 295.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,800**
108889	297.5 to 302.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	24	SF	$120	**$2,820**
108890	303.9 to 305.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108891	310.3 to 317.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **COMMON WAY** **$153,832.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261213	WESTBERRY BVD	COMMON WAY	FORUM WAY	34

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108952	0.4 to 11.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
108953	14.7 to 23.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,100**
108954	31.9 to 39.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
108955	39.7 to 48.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
108956	52.0 to 58.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
108957	58.8 to 60.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
108947	59.2 to 60.2 feet	**Vertical Change**	.43"	5 ft	5	REF		
108958	63.3 to 69.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
108948	64.3 to 65.3 feet	**Vertical Change**	-.34"	5 ft	5	REF		
108959	69.8 to 79.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
108960	81.8 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
108961	83.9 to 89.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
108949	97.2 to 98.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
108962	100.8 to 102.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
108963	103.4 to 121.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
108950	110.1 to 111.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
108964	122.1 to 147.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	**$15,480**
108965	151.3 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **COMMON WAY** **$73,815.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161534	WESTBERRY BVD	CROWN LN	DOUBLE TREE WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87941	0.0 to 3.8 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	19	SF	$120	**$2,280**
87942	4.0 to 5.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
87943	11.3 to 12.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
87944	13.5 to 14.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87945	22.0 to 26.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
87946	33.1 to 43.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,180**
88010	36.3 to 37.8 feet		6.0-7.0%	5 ft	8			
87947	43.8 to 47.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
87948	51.4 to 52.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87949	53.9 to 54.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
87950	61.1 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
87951	65.7 to 70.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,760**
87952	73.4 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
87912	75.5 to 76.5 feet	**Vertical Change**	1.14"	5 ft	5	REF		
87913	80.5 to 81.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87953	84.1 to 88.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
87914	91.9 to 92.9 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
87954	93.3 to 94.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
87915	98.2 to 99.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
87955	99.6 to 103.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**
87916	102.3 to 103.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87917	105.6 to 106.6 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
87956	111.0 to 114.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
87918	116.8 to 117.8 feet	**Vertical Change**	.76"	5 ft	5	SF	$75	**$375**
87957	122.0 to 128.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
87958	128.5 to 135.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
87959	136.5 to 139.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
87960	139.3 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161534	WESTBERRY BVD	CROWN LN	DOUBLE TREE WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87961	145.0 to 149.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
87962	152.1 to 154.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
87963	155.6 to 159.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
87964	163.8 to 167.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
87965	169.6 to 170.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87966	171.3 to 172.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
87967	175.0 to 185.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,540**
87968	187.9 to 189.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
87969	192.6 to 199.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,020**
87919	201.4 to 202.4 feet	**Vertical Change**	.45"	5 ft	5	REF		
87970	201.6 to 206.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
87971	207.0 to 219.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	62	SF	$120	**$7,380**
87920	215.7 to 216.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
87972	220.8 to 221.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87973	232.0 to 233.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
87921	242.3 to 243.3 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
87922	245.6 to 246.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
87923	248.3 to 249.3 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
87974	252.7 to 254.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
87924	253.1 to 254.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
87975	258.8 to 259.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
87976	261.2 to 262.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
87925	261.5 to 262.5 feet	**Vertical Change**	-.3"	5 ft	5	REF		
87977	264.7 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87978	268.8 to 272.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
87927	272.5 to 276.0 feet	**Vertical Change**	.32"	5 ft	18	LF	$75	**$1,313**
87928	277.9 to 278.9 feet	**Vertical Change**	3.55"	5 ft	5	SF	$75	**$375**
87979	279.4 to 281.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161534	WESTBERRY BVD	CROWN LN	DOUBLE TREE WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87929	280.0 to 283.3 feet	Vertical Change	.28"	5 ft	17	REF		
87930	284.7 to 285.7 feet	Vertical Change	3.06"	5 ft	5	SF	$75	$375
87980	290.2 to 299.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	$5,280
87931	291.3 to 292.3 feet	Vertical Change	.74"	5 ft	5	REF		
87932	296.8 to 297.8 feet	Vertical Change	.26"	5 ft	5	REF		
87981	300.6 to 301.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$600
87982	308.4 to 313.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,760
87983	313.0 to 316.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$1,980
87933	319.8 to 320.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	$375
87984	321.3 to 326.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	$3,120
87985	329.2 to 335.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	$3,480
88011	330.2 to 332.2 feet		5.0-6.0%	5 ft	10			
87986	342.8 to 348.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	$3,240
87934	346.4 to 347.4 feet	Vertical Change	.4"	5 ft	5	REF		
87987	353.4 to 355.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
87988	356.4 to 360.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
87989	365.2 to 377.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	60	SF	$120	$7,140
87990	380.4 to 384.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	$2,220
87991	387.8 to 391.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	$1,980
87992	393.6 to 395.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	$840
87993	399.2 to 401.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
87994	403.1 to 404.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
87995	408.6 to 411.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,500
87935	409.4 to 410.4 feet	Vertical Change	.35"	5 ft	5	REF		
87936	429.9 to 430.9 feet	Vertical Change	.28"	5 ft	5	LF	$75	$375
87996	446.3 to 447.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
87997	454.1 to 459.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
87998	461.3 to 465.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,400

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161534	WESTBERRY BVD	CROWN LN	DOUBLE TREE WAY	86

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87999	468.2 to 469.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
88000	470.8 to 479.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,220**
88001	482.6 to 489.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,140**
88002	491.9 to 496.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
88003	500.8 to 501.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
88004	506.7 to 517.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,360**
88005	517.3 to 518.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87937	521.0 to 522.0 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
88006	527.3 to 530.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
87938	529.5 to 530.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
88007	534.0 to 536.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
88008	538.8 to 540.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
88009	541.7 to 545.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
87939	543.8 to 544.8 feet	**Vertical Change**	.38"	5 ft	5	REF		
87940	545.7 to 546.7 feet	**Vertical Change**	2.31"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **CROWN LN** **$163,792.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170757	WESTBERRY BVD	DOUBLE TREE WAY	RIVERVIEW DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71019	2.3 to 3.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
71020	6.3 to 22.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
71021	25.8 to 28.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
71011	29.9 to 30.9 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
71022	31.6 to 40.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
71023	42.4 to 45.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
71068	64.3 to 65.3 feet		5.0-6.0%	5 ft	5			
71069	65.8 to 66.8 feet		6.0-7.0%	5 ft	5			
71024	65.9 to 76.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
71070	70.3 to 71.4 feet		5.0-6.0%	5 ft	6			
71025	86.4 to 87.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
71026	88.8 to 94.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71027	96.4 to 114.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	91	SF	$120	**$10,860**
71028	117.8 to 131.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
71029	134.1 to 148.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
71012	156.5 to 157.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
71030	159.7 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
71013	168.4 to 169.4 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
71031	170.4 to 174.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
71032	177.7 to 186.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
71033	189.8 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
71034	207.1 to 213.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
71035	215.1 to 216.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
71036	222.6 to 240.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	88	SF	$120	**$10,500**
71037	244.8 to 251.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,140**
71038	254.3 to 260.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	**$3,900**
71039	264.6 to 277.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,560**
71040	277.2 to 288.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170757	WESTBERRY BVD	DOUBLE TREE WAY	RIVERVIEW DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71041	305.0 to 320.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
71042	331.1 to 332.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71043	339.5 to 346.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
71044	347.0 to 354.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
71014	353.3 to 354.3 feet	**Vertical Change**	.39"	5 ft	5	REF		
71045	356.4 to 373.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
71046	377.4 to 388.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
71047	388.8 to 392.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
71048	392.8 to 406.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	70	SF	$120	**$8,400**
71049	407.5 to 412.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
71050	414.3 to 423.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,400**
71015	424.3 to 425.3 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
71051	427.2 to 433.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
71052	436.5 to 443.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
71053	443.6 to 473.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	147	SF	$120	**$17,640**
71054	473.9 to 475.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71055	482.8 to 490.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
71056	498.9 to 499.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
71057	502.4 to 513.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
71058	515.6 to 527.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,260**
71059	530.8 to 544.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,280**
71060	545.8 to 549.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
71016	551.9 to 552.9 feet	**Vertical Change**	.35"	5 ft	5	REF		
71061	552.5 to 555.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
71017	555.2 to 556.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
71062	557.7 to 558.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71063	561.8 to 563.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
71064	565.7 to 576.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2109170757	WESTBERRY BVD	DOUBLE TREE WAY	RIVERVIEW DR	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71018	566.8 to 567.8 feet	Vertical Change	-.34"	5 ft	5	REF		
71065	579.1 to 584.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
71066	584.6 to 585.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
71067	588.7 to 592.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,520**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **DOUBLE TREE WAY** **$234,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170849	WESTBERRY BVD	DOUBLE TREE WAY	TODD ST	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
71527	0.0 to 2.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
71518	10.2 to 11.2 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
71519	15.3 to 16.3 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
71520	27.3 to 28.3 feet	Vertical Change	.28"	5 ft	5	LF	$75	**$375**
71521	40.6 to 41.6 feet	Vertical Change	.37"	5 ft	5	LF	$75	**$375**
71528	46.3 to 51.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
71522	47.9 to 48.9 feet	Vertical Change	1.2"	5 ft	5	REF		
71529	54.4 to 65.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,780**
71523	64.0 to 65.0 feet	Vertical Change	3.1"	5 ft	5	REF		
71524	67.2 to 68.2 feet	Vertical Change	-.55"	5 ft	5	SF	$75	**$375**
71530	71.7 to 78.6 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	34	SF	$120	**$4,140**
71531	78.6 to 81.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
71532	82.2 to 83.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
71533	85.2 to 112.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	138	SF	$120	**$16,500**
71534	114.3 to 119.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
71535	119.8 to 123.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
71536	134.8 to 140.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
71526	136.8 to 137.8 feet	Vertical Change	2.2"	5 ft	5	REF		
71537	150.8 to 166.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,300**
71538	166.3 to 176.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	53	SF	$120	**$6,300**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **DOUBLE TREE WAY** **$60,675.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261154	WESTBERRY BVD	FAIRFIELD WAY	FAIRWAY AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108757	6.3 to 13.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
108741	14.6 to 15.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
108758	14.9 to 38.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	117	SF	$120	**$14,040**
108759	38.5 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
108760	49.0 to 66.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	88	SF	$120	**$10,560**
108742	56.7 to 57.7 feet	**Vertical Change**	-.43"	5 ft	5	REF		
108761	70.9 to 74.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
108762	74.4 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,580**
108763	96.2 to 111.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	76	SF	$120	**$9,120**
108743	131.2 to 132.2 feet	**Vertical Change**	2.14"	5 ft	5	REF		
108764	131.3 to 141.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	53	SF	$120	**$6,300**
108765	141.8 to 148.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
108766	149.3 to 160.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
108744	151.6 to 152.6 feet	**Vertical Change**	.31"	5 ft	5	REF		
108767	172.7 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	380	SF	$120	**$45,540**
108745	204.9 to 205.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
108768	249.8 to 270.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,660**
108787	270.0 to 272.5 feet		5.0-6.0%	5 ft	13			
108788	270.0 to 272.5 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
108746	275.0 to 276.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
108769	275.8 to 280.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
108789	278.4 to 280.3 feet		8.0-9.0%	5 ft	10			
108770	280.9 to 283.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
108747	281.5 to 282.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
108771	286.3 to 295.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,760**
108772	298.4 to 301.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
108748	322.8 to 323.8 feet	**Vertical Change**	.36"	5 ft	5	LF	$75	**$375**
108773	335.3 to 340.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261154	WESTBERRY BVD	FAIRFIELD WAY	FAIRWAY AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108774	343.4 to 347.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
108775	349.8 to 351.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108776	366.9 to 369.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
108777	376.0 to 395.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	96	SF	$120	**$11,460**
108778	399.1 to 434.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	179	SF	$120	**$21,420**
108749	407.5 to 408.5 feet	**Vertical Change**	2.55"	5 ft	5	REF		
108750	417.9 to 418.9 feet	**Vertical Change**	3.44"	5 ft	5	REF		
108751	434.3 to 435.3 feet	**Vertical Change**	.38"	5 ft	5	REF		
108779	438.3 to 449.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
108752	462.1 to 463.1 feet	**Vertical Change**	1.18"	5 ft	5	SF	$75	**$375**
108753	471.9 to 472.9 feet	**Vertical Change**	-.34"	5 ft	5	LF	$75	**$375**
108780	489.7 to 493.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
108754	506.1 to 507.1 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
108755	509.6 to 510.6 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
108781	513.8 to 519.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
108782	522.4 to 531.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
108783	532.7 to 533.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
108784	534.3 to 537.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
108785	542.3 to 554.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
108756	545.8 to 546.8 feet	**Vertical Change**	.35"	5 ft	5	REF		
108786	554.1 to 563.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **FAIRFIELD WAY** **$221,055.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261158	WESTBERRY BVD	FAIRWAY AVE	FORUM WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108802	2.8 to 14.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
108829	18.1 to 19.1 feet	Protruding Object	36"	5 ft	5	JOB	$99	**$99**
108803	18.7 to 21.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
108804	26.8 to 32.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,120**
108805	32.0 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,380**
108790	56.1 to 57.1 feet	Vertical Change	.38"	5 ft	5	REF		
108806	56.8 to 64.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
108807	64.6 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
108808	76.0 to 97.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	108	SF	$120	**$12,960**
108791	83.5 to 84.5 feet	Vertical Change	.43"	5 ft	5	REF		
108792	87.6 to 88.6 feet	Vertical Change	.46"	5 ft	5	REF		
108793	97.6 to 98.6 feet	Vertical Change	3.42"	5 ft	5	REF		
108809	100.8 to 105.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
108794	103.7 to 104.7 feet	Vertical Change	2.53"	5 ft	5	REF		
108810	109.3 to 110.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
108811	111.6 to 148.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	184	SF	$120	**$22,080**
108812	154.8 to 166.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	**$7,020**
108795	158.3 to 159.3 feet	Vertical Change	.38"	5 ft	5	REF		
108796	170.9 to 171.9 feet	Vertical Change	2.25"	5 ft	5	SF	$75	**$375**
108797	172.6 to 173.6 feet	Vertical Change	1.45"	5 ft	5	SF	$75	**$375**
108813	176.1 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
108814	185.2 to 194.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**
108815	194.3 to 223.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	148	SF	$120	**$17,700**
108816	226.4 to 231.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
108817	236.5 to 245.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
108818	245.4 to 265.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,820**
108798	251.7 to 252.7 feet	Vertical Change	1.07"	5 ft	5	REF		
108799	258.5 to 259.5 feet	Vertical Change	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261158	WESTBERRY BVD	FAIRWAY AVE	FORUM WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108819	267.5 to 288.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
108800	276.8 to 277.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
108820	292.7 to 294.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
108821	294.7 to 310.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,360**
108822	313.9 to 322.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
108823	325.1 to 334.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
108801	325.7 to 326.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
108824	340.8 to 364.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,100**
108825	366.6 to 382.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	80	SF	$120	**$9,540**
108826	382.5 to 388.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,420**
108827	388.4 to 403.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	74	SF	$120	**$8,880**
108828	407.8 to 408.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **FAIRWAY AVE** **$187,509.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261201	WESTBERRY BVD	FORUM WAY	COMMON WAY	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108836	1.4 to 3.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
108830	5.9 to 6.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
108837	6.9 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
108838	14.5 to 29.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	74	SF	$120	**$8,880**
108839	29.3 to 41.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	60	SF	$120	**$7,140**
108840	42.5 to 43.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
108841	43.8 to 45.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
108831	59.5 to 60.5 feet	**Vertical Change**	-.28"	5 ft	5	LF	$75	**$375**
108842	63.7 to 65.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
108832	66.2 to 67.2 feet	**Vertical Change**	.46"	5 ft	5	REF		
108843	66.4 to 75.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
108834	77.4 to 78.4 feet	**Vertical Change**	1.06"	5 ft	5	SF	$75	**$375**
108844	81.4 to 85.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,580**
108835	85.3 to 86.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
108845	87.1 to 88.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
108846	89.0 to 91.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
108847	94.5 to 109.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
108848	109.4 to 117.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,560**
108849	117.0 to 119.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
108850	122.6 to 125.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
108851	138.7 to 139.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108852	149.1 to 162.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,740**
108853	162.0 to 163.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **FORUM WAY** **$60,150.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261223	WESTBERRY BVD	FORUM WAY	FAIRWAY AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108994	2.3 to 4.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
108995	5.5 to 6.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
108981	15.2 to 16.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
108982	19.2 to 20.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
108996	49.3 to 60.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	58	SF	$120	**$6,900**
108983	57.6 to 58.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
108997	61.8 to 63.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
108998	64.2 to 72.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
108999	76.2 to 80.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
109000	83.1 to 90.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
109001	91.5 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
109002	98.2 to 103.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
109003	104.4 to 106.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
109004	110.4 to 119.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**
109005	126.3 to 131.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
109006	152.2 to 153.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
109007	166.7 to 185.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
108984	167.3 to 168.3 feet	**Vertical Change**	-.28"	5 ft	5	REF		
109008	186.0 to 190.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
109009	191.8 to 198.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
109010	205.7 to 206.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
109011	217.3 to 219.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
109012	221.8 to 224.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
108986	223.2 to 224.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
109013	238.2 to 239.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
108987	250.6 to 251.6 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
108988	254.3 to 255.3 feet	**Vertical Change**	1.14"	5 ft	5	SF	$75	**$375**
108989	265.0 to 266.0 feet	**Vertical Change**	.44"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261223	WESTBERRY BVD	FORUM WAY	FAIRWAY AVE	52

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
109014	267.0 to 270.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
109015	299.3 to 323.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,400**
109016	326.4 to 362.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	181	SF	$120	**$21,660**
108990	331.1 to 332.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
108991	348.1 to 349.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
109017	372.1 to 373.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
109018	381.3 to 386.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
108992	383.1 to 384.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
108993	388.6 to 389.6 feet	**Vertical Change**	1.06"	5 ft	5	SF	$75	**$375**
109019	392.1 to 406.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **FORUM WAY** **$114,270.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111407	WESTBERRY BVD	GAMAY AVE	3073 WESTBERRY BVD	27

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92358	4.8 to 5.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92359	28.3 to 29.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
92356	40.7 to 41.7 feet	**Vertical Change**	.32"	5 ft	5	REF		
92360	41.4 to 43.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
92357	49.7 to 50.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
92361	68.1 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
92362	68.6 to 69.8 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **GAMAY AVE** **$3,855.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201261149	WESTBERRY BVD	HOLLOW AVE	FAIRFIELD WAY	24

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108729	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
108730	2.8 to 8.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
108731	16.5 to 24.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
108725	22.5 to 23.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
108732	26.2 to 57.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	158	SF	$120	**$18,900**
108733	57.9 to 59.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
108734	62.6 to 64.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
108735	84.4 to 89.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108726	102.7 to 103.7 feet	**Vertical Change**	-.36"	5 ft	5	LF	$75	**$375**
108736	104.1 to 105.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
108737	139.8 to 144.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
108738	152.3 to 167.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	74	SF	$120	**$8,940**
108739	167.2 to 191.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	121	SF	$120	**$14,520**
108727	168.1 to 169.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
108728	180.5 to 181.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
108740	194.7 to 204.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **HOLLOW AVE** **$65,895.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151535	WESTBERRY BVD	KIMMEL AVE	CAMBRIA AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84021	2.5 to 10.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
84010	6.7 to 7.7 feet	**Vertical Change**	-.28"	5 ft	5	REF		
84011	8.5 to 9.5 feet	**Vertical Change**	3.5"	5 ft	5	REF		
84022	13.3 to 14.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
84023	15.6 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
84024	18.8 to 20.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
84025	23.0 to 36.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,860**
84012	30.4 to 31.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
84026	40.0 to 47.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	37	SF	$120	**$4,380**
84013	45.1 to 46.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
84027	48.3 to 50.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
84028	50.0 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
84029	56.8 to 59.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
84030	62.2 to 83.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	105	SF	$120	**$12,540**
84031	83.7 to 88.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,820**
84032	89.0 to 92.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
84014	92.5 to 93.5 feet	**Vertical Change**	-.57"	5 ft	5	REF		
84033	92.7 to 96.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
84034	98.9 to 102.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
84035	108.4 to 110.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
84036	112.4 to 116.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,280**
84037	118.8 to 120.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
84038	125.9 to 127.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
84015	130.3 to 131.3 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
84039	133.7 to 139.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
84040	143.4 to 149.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**
84041	152.3 to 166.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,640**
84016	161.7 to 162.7 feet	**Vertical Change**	1.76"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151535	WESTBERRY BVD	KIMMEL AVE	CAMBRIA AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84042	166.7 to 169.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84043	171.7 to 182.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
84017	178.5 to 179.5 feet	**Vertical Change**	.37"	5 ft	5	REF		
84044	187.2 to 190.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
84045	190.7 to 194.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
84018	193.0 to 194.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
84019	195.2 to 196.2 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
84046	196.3 to 202.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
84047	202.2 to 203.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
84048	208.0 to 211.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
84049	214.3 to 222.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
84050	225.5 to 228.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
84051	230.9 to 232.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
84052	234.6 to 243.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,580**
84053	243.9 to 246.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
84020	244.0 to 245.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
84066	245.8 to 246.8 feet		5.0-6.0%	5 ft	5			
84054	253.9 to 265.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
84055	268.1 to 271.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
84056	272.7 to 273.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
84057	277.9 to 278.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84058	278.9 to 280.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
84059	288.8 to 297.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
84060	307.4 to 321.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
84061	326.8 to 332.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
84062	334.4 to 336.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
84063	339.9 to 344.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
84064	346.3 to 349.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151535	WESTBERRY BVD	KIMMEL AVE	CAMBRIA AVE	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84065	350.6 to 357.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
84067	364.6 to 365.8 feet		6.0-7.0%	5 ft	6			
84068	365.8 to 368.1 feet		5.0-6.0%	5 ft	12			
84069	365.8 to 368.1 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **KIMMEL AVE** **$142,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111413	WESTBERRY BVD	MERLOT AVE	GAMAY AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92363	1.9 to 2.9 feet	Vertical Change	.36"	5 ft	5	REF		
92377	2.6 to 14.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
92394	14.5 to 26.8 feet	Key Note Segment		5 ft	62			
92364	26.9 to 27.9 feet	Vertical Change	.77"	5 ft	5	REF		
92378	28.8 to 48.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	**$11,700**
92395	48.3 to 67.6 feet	Key Note Segment		5 ft	96			
92379	68.6 to 72.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
92380	72.2 to 78.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,540**
92381	80.2 to 82.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
92396	86.2 to 99.0 feet	Key Note Segment		5 ft	64			
92382	108.4 to 113.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
92383	113.0 to 120.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
92365	115.6 to 116.6 feet	Vertical Change	.31"	5 ft	5	REF		
92397	123.5 to 140.8 feet	Key Note Segment		5 ft	87			
92366	132.4 to 133.4 feet	Vertical Change	.29"	5 ft	5	REF		
92384	140.8 to 142.0 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	6	SF	$40	**$240**
92385	146.7 to 147.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
92386	148.7 to 150.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
92398	156.9 to 173.3 feet	Key Note Segment		5 ft	82			
92367	166.0 to 167.0 feet	Vertical Change	.3"	5 ft	5	REF		
92387	195.3 to 196.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
92368	195.8 to 196.8 feet	Vertical Change	-.36"	5 ft	5	REF		
92399	201.9 to 213.7 feet	Key Note Segment		5 ft	59			
92369	238.7 to 239.7 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
92400	246.3 to 258.2 feet	Key Note Segment		5 ft	60			
92401	291.5 to 309.2 feet	Key Note Segment		5 ft	89			
92388	313.8 to 316.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
92402	345.7 to 362.9 feet	Key Note Segment		5 ft	86			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111413	WESTBERRY BVD	MERLOT AVE	GAMAY AVE	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
92371	355.1 to 356.1 feet	Vertical Change	.28"	5 ft	5	REF		
92389	363.1 to 367.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	20	SF	$40	**$800**
92372	387.4 to 388.4 feet	Vertical Change	.42"	5 ft	5	LF	$75	**$375**
92390	390.4 to 392.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
92403	393.8 to 407.2 feet	Key Note Segment		5 ft	67			
92373	401.3 to 402.3 feet	Vertical Change	-.29"	5 ft	5	REF		
92374	423.5 to 424.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
92375	448.4 to 449.4 feet	Vertical Change	-.27"	5 ft	5	LF	$75	**$375**
92376	457.0 to 458.0 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
92391	458.4 to 464.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
92392	483.4 to 486.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
92393	489.3 to 493.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **MERLOT AVE** **$49,175.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151437	WESTBERRY BVD	REN WAY	WESTGATE DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83297	0.8 to 1.8 feet	Vertical Change	.44"	5 ft	5	LF	$75	$375
83326	2.7 to 7.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	$2,700
83298	4.1 to 5.1 feet	Vertical Change	1.13"	5 ft	5	REF		
83299	8.1 to 9.1 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
83327	9.8 to 10.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	$660
83328	11.7 to 13.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	$1,320
83300	12.2 to 13.2 feet	Vertical Change	.26"	5 ft	5	REF		
83329	14.8 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,140
83301	15.9 to 16.9 feet	Vertical Change	.57"	5 ft	5	REF		
83302	20.5 to 21.5 feet	Vertical Change	-.28"	5 ft	5	REF		
83330	20.8 to 22.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	$840
83331	24.1 to 31.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,200
83303	26.5 to 27.5 feet	Vertical Change	.49"	5 ft	5	REF		
83332	36.9 to 39.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	$1,740
83304	39.4 to 40.4 feet	Vertical Change	-.32"	5 ft	5	REF		
83333	42.7 to 45.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	$1,860
83305	46.1 to 47.1 feet	Vertical Change	3.37"	5 ft	5	SF	$75	$375
83334	48.5 to 52.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	$2,400
83335	52.7 to 59.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
83336	62.5 to 75.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	$7,680
83306	72.4 to 73.4 feet	Vertical Change	-.41"	5 ft	5	REF		
83307	75.9 to 76.9 feet	Vertical Change	.66"	5 ft	5	SF	$75	$375
83337	77.5 to 81.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	$2,160
83338	85.6 to 86.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
83308	88.5 to 89.5 feet	Vertical Change	.49"	5 ft	5	REF		
83339	88.8 to 91.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,500
83340	95.1 to 103.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	$4,920
83341	103.3 to 105.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	$1,020

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151437	WESTBERRY BVD	REN WAY	WESTGATE DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83342	108.1 to 115.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
83309	116.1 to 117.1 feet	**Vertical Change**	3.48"	5 ft	5	SF	$75	**$375**
83343	118.6 to 120.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83344	121.1 to 128.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
83310	122.8 to 123.8 feet	**Vertical Change**	.58"	5 ft	5	REF		
83311	130.1 to 131.1 feet	**Vertical Change**	3.41"	5 ft	5	SF	$75	**$375**
83345	132.4 to 137.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
83346	137.1 to 144.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	**$4,200**
83313	142.7 to 143.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
83347	144.4 to 148.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
83348	151.6 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
83349	153.7 to 154.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83314	156.5 to 157.5 feet	**Vertical Change**	.71"	5 ft	5	SF	$75	**$375**
83350	160.5 to 161.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
83351	164.5 to 175.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	57	SF	$120	**$6,780**
83352	176.0 to 189.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
83315	187.7 to 188.7 feet	**Vertical Change**	1.61"	5 ft	5	REF		
83316	193.0 to 194.0 feet	**Vertical Change**	2.21"	5 ft	5	REF		
83353	193.1 to 195.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,620**
83317	196.3 to 197.3 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
83354	198.5 to 200.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
83355	201.0 to 217.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,600**
83318	204.5 to 205.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
83319	208.5 to 209.5 feet	**Vertical Change**	-.36"	5 ft	5	REF		
83320	211.7 to 212.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
83356	223.0 to 226.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
83321	226.1 to 227.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
83357	226.5 to 232.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151437	WESTBERRY BVD	REN WAY	WESTGATE DR	71

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83358	234.5 to 248.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
83322	235.0 to 236.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
83323	244.9 to 245.9 feet	**Vertical Change**	.29"	5 ft	5	REF		
83359	249.3 to 250.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
83360	253.0 to 254.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$660**
83324	255.0 to 256.0 feet	**Vertical Change**	1.32"	5 ft	5	SF	$75	**$375**
83361	256.1 to 257.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83362	262.8 to 264.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
83363	264.8 to 267.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
83364	269.8 to 276.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
83365	277.5 to 280.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
83366	282.4 to 283.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83367	285.3 to 286.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
83325	288.2 to 289.2 feet	**Vertical Change**	2.96"	5 ft	5	REF		
83368	288.5 to 301.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	66	SF	$120	**$7,920**
83369	302.3 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
83370	307.5 to 309.8 feet		5.0-6.0%	5 ft	12			
83371	307.5 to 309.8 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **REN WAY** **$132,615.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170752	WESTBERRY BVD	RIVERVIEW DR	DOUBLE TREE WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70967	0.0 to 2.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,320**
70968	2.2 to 3.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
70969	5.7 to 7.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
70970	10.4 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
70959	23.8 to 24.8 feet	**Vertical Change**	.28"	5 ft	5	REF		
70971	24.5 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
70972	56.9 to 94.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	189	SF	$120	**$22,620**
70973	94.8 to 125.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	153	SF	$120	**$18,300**
70974	125.9 to 129.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
70975	129.9 to 134.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
70976	134.0 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
70977	145.7 to 158.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	65	SF	$120	**$7,740**
70978	163.4 to 175.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
70960	175.0 to 176.0 feet	**Vertical Change**	.44"	5 ft	5	REF		
70961	178.5 to 179.5 feet	**Vertical Change**	-.46"	5 ft	5	LF	$75	**$375**
70979	181.5 to 202.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
70980	203.4 to 204.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70981	207.9 to 211.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
70982	211.0 to 220.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
70983	224.4 to 229.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
70984	235.6 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
70962	242.8 to 243.8 feet	**Vertical Change**	.65"	5 ft	5	REF		
70985	249.2 to 263.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
70986	272.3 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
70987	278.2 to 285.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
70988	287.2 to 297.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
70989	301.8 to 304.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
70990	309.4 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2109170752	WESTBERRY BVD	RIVERVIEW DR	DOUBLE TREE WAY	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70991	315.6 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,060**
70992	324.3 to 347.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,920**
70993	348.3 to 353.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
70994	356.9 to 363.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
70963	357.8 to 358.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
70995	365.5 to 386.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,540**
70996	388.9 to 390.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
70997	394.3 to 448.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	271	SF	$120	**$32,520**
70964	400.2 to 401.2 feet	**Vertical Change**	.35"	5 ft	5	REF		
70965	417.6 to 418.6 feet	**Vertical Change**	.63"	5 ft	5	REF		
70998	451.1 to 452.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
70999	455.0 to 477.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	110	SF	$120	**$13,200**
71000	479.7 to 485.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
70966	485.9 to 486.9 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
71001	488.7 to 490.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
71002	491.3 to 493.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
71003	496.1 to 498.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
71004	501.0 to 502.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
71005	506.4 to 519.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
71006	521.1 to 526.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,420**
71007	526.8 to 533.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
71008	536.2 to 541.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,180**
71009	543.5 to 544.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
71010	556.8 to 572.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,180**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **RIVERVIEW DR** **$253,470.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161540	WESTBERRY BVD	STATE ST	BARON ST	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88041	0.0 to 1.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
88042	5.3 to 6.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
88036	20.3 to 21.3 feet	**Vertical Change**	.31"	5 ft	5	REF		
88043	21.1 to 22.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
88044	23.2 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
88037	30.3 to 31.3 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
88045	33.8 to 36.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
88046	47.3 to 48.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88047	51.0 to 52.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
88048	57.4 to 58.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88049	60.8 to 65.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$3,000**
88050	66.2 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
88051	70.0 to 73.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
88038	70.1 to 71.1 feet	**Vertical Change**	-.31"	5 ft	5	REF		
88052	78.5 to 81.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
88053	84.3 to 108.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	123	SF	$120	**$14,760**
88054	112.9 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
88039	121.0 to 122.0 feet	**Vertical Change**	-.41"	5 ft	5	REF		
88055	130.7 to 131.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
88056	134.7 to 145.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
88057	145.7 to 149.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
88058	157.4 to 169.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	62	SF	$120	**$7,440**
88040	169.2 to 170.2 feet	**Vertical Change**	-.26"	5 ft	5	REF		
88059	169.9 to 171.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
88060	174.1 to 177.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
88061	177.8 to 181.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **STATE ST** **$64,275.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151613	WESTBERRY BVD	SUMMER LN	REN WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84556	0.8 to 5.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
84557	8.0 to 11.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
84558	13.5 to 14.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84559	17.6 to 19.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
84560	20.1 to 32.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,680**
84561	32.9 to 41.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	43	SF	$120	**$5,160**
84543	41.5 to 44.9 feet	**Vertical Change**	.26"	5 ft	17	REF		
84562	41.8 to 43.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
84563	45.4 to 49.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,640**
84564	49.8 to 53.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	**$1,980**
84544	51.3 to 52.3 feet	**Vertical Change**	-.39"	5 ft	5	REF		
84545	55.8 to 56.8 feet	**Vertical Change**	.45"	5 ft	5	LF	$75	**$375**
84546	62.7 to 63.7 feet	**Vertical Change**	.84"	5 ft	5	SF	$75	**$375**
84565	79.9 to 86.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,140**
84566	86.8 to 89.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
84567	90.3 to 93.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
84568	93.9 to 96.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
84547	94.9 to 95.9 feet	**Vertical Change**	.61"	5 ft	5	REF		
84592	96.9 to 118.3 feet	Key Note Segment		5 ft	107			
84569	119.2 to 124.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
84548	121.6 to 122.6 feet	**Vertical Change**	-.44"	5 ft	5	LF	$75	**$375**
84549	123.4 to 124.4 feet	**Vertical Change**	.97"	5 ft	5	REF		
84570	129.3 to 141.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,140**
84550	135.7 to 136.7 feet	**Vertical Change**	.66"	5 ft	5	REF		
84571	141.2 to 143.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
84572	152.0 to 153.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
84573	154.0 to 156.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,620**
84551	171.6 to 172.6 feet	**Vertical Change**	1.24"	5 ft	5	SF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151613	WESTBERRY BVD	SUMMER LN	REN WAY	70

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84552	184.3 to 185.3 feet	Vertical Change	-.29"	5 ft	5	LF	$75	$375
84574	186.6 to 187.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	$660
84575	188.7 to 195.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	35	SF	$120	$4,140
84553	195.8 to 196.8 feet	Vertical Change	1.05"	5 ft	5	SF	$75	$375
84576	198.4 to 204.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	$3,540
84577	204.7 to 206.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	$1,260
84578	210.1 to 221.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	$6,540
84579	224.8 to 225.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
84580	226.5 to 232.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
84581	238.8 to 242.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	$2,100
84582	245.3 to 248.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
84583	250.9 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
84584	255.8 to 261.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	$3,480
84585	261.6 to 262.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$720
84554	278.7 to 279.7 feet	Vertical Change	.68"	5 ft	5	SF	$75	$375
84586	283.1 to 285.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,680
84587	285.9 to 295.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$5,940
84555	307.6 to 308.6 feet	Vertical Change	.71"	5 ft	5	SF	$75	$375
84588	309.8 to 316.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	33	SF	$120	$3,900
84589	317.6 to 318.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	$660
84590	323.6 to 327.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	$2,460
84591	332.7 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	$7,560
84593	356.3 to 357.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **SUMMER LN** **$103,740.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161529	WESTBERRY BVD	SUNSET AVE	CROWN LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87882	0.7 to 6.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,540**
87868	5.4 to 6.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
87883	10.3 to 11.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
87884	11.6 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
87885	18.7 to 23.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
87886	24.0 to 26.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
87887	30.2 to 33.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87888	36.8 to 49.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
87869	40.6 to 41.6 feet	**Vertical Change**	-.6"	5 ft	5	REF		
87889	53.7 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
87890	56.6 to 57.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
87870	57.9 to 58.9 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
87871	61.1 to 62.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
87891	63.4 to 65.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
87892	70.8 to 71.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87872	73.6 to 74.6 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
87893	76.6 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
87894	79.6 to 93.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
87874	82.3 to 83.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
87875	87.0 to 88.0 feet	**Vertical Change**	.27"	5 ft	5	REF		
87876	92.5 to 93.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
87895	95.4 to 101.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
87896	103.9 to 106.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
87897	109.7 to 112.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
87898	113.6 to 114.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87899	132.8 to 134.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87877	152.3 to 153.3 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**
87878	161.4 to 165.1 feet	**Vertical Change**	.3"	5 ft	19	LF	$75	**$1,388**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161529	WESTBERRY BVD	SUNSET AVE	CROWN LN	78

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87900	164.3 to 168.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
87901	168.3 to 171.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
87879	169.4 to 170.4 feet	**Vertical Change**	-.5"	5 ft	5	REF		
87902	175.5 to 176.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**
87903	184.8 to 191.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
87904	196.4 to 197.5 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	6	SF	$120	**$660**
87905	207.2 to 213.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
87906	214.8 to 215.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87880	220.3 to 221.3 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
87907	224.4 to 227.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
87908	232.4 to 240.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,100**
87909	243.9 to 245.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
87881	248.6 to 252.0 feet	**Vertical Change**	.32"	5 ft	17	LF	$75	**$1,275**
87910	251.9 to 253.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
87911	263.8 to 271.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	38	SF	$120	**$4,500**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **SUNSET AVE** **$76,057.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161030	WESTBERRY BVD	SUNSET AVE	KIMMEL AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85221	0.0 to 12.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
85222	15.8 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
85223	23.5 to 31.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
85224	32.3 to 33.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
85225	36.2 to 44.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
85226	44.4 to 51.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
85195	49.8 to 50.8 feet	Vertical Change	-.37"	5 ft	5	REF		
85196	55.1 to 56.1 feet	Vertical Change	.57"	5 ft	5	SF	$75	**$375**
85227	58.7 to 62.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,160**
85228	64.3 to 73.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,700**
85229	74.9 to 79.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	24	SF	$120	**$2,940**
85230	84.3 to 88.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,340**
85231	90.2 to 97.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
85232	99.3 to 109.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,120**
85233	109.5 to 123.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
85197	118.9 to 119.9 feet	Vertical Change	3.17"	5 ft	5	REF		
85198	127.9 to 128.9 feet	Vertical Change	-.27"	5 ft	5	REF		
85234	128.0 to 129.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
85235	129.3 to 147.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,100**
85199	133.3 to 134.3 feet	Vertical Change	.26"	5 ft	5	REF		
85236	150.3 to 152.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,260**
85200	155.5 to 156.5 feet	Vertical Change	.46"	5 ft	5	LF	$75	**$375**
85201	159.5 to 160.5 feet	Vertical Change	.95"	5 ft	5	SF	$75	**$375**
85237	167.9 to 169.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
85238	172.7 to 176.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
85239	190.0 to 202.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,380**
85240	207.9 to 210.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
85241	210.1 to 216.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161030	WESTBERRY BVD	SUNSET AVE	KIMMEL AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85242	228.8 to 231.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
85243	236.5 to 239.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
85244	242.0 to 250.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**
85203	248.2 to 249.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
85245	250.1 to 253.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$1,980**
85246	255.2 to 257.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
85247	259.3 to 264.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
85204	259.4 to 260.4 feet	**Vertical Change**	-.27"	5 ft	5	REF		
85248	276.9 to 295.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	92	SF	$120	**$11,040**
85205	278.4 to 279.4 feet	**Vertical Change**	.38"	5 ft	5	REF		
85206	296.0 to 297.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
85207	300.5 to 301.5 feet	**Vertical Change**	.94"	5 ft	5	SF	$75	**$375**
85208	304.6 to 305.6 feet	**Vertical Change**	.62"	5 ft	5	SF	$75	**$375**
85249	305.8 to 308.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
85210	313.5 to 314.5 feet	**Vertical Change**	-.78"	5 ft	5	SF	$75	**$375**
85211	319.5 to 320.5 feet	**Vertical Change**	.87"	5 ft	5	SF	$75	**$375**
85250	324.2 to 332.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
85212	330.7 to 331.7 feet	**Vertical Change**	.26"	5 ft	5	REF		
85251	344.0 to 346.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85252	356.9 to 358.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
85253	363.0 to 370.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**
85254	371.2 to 374.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
85255	374.2 to 375.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
85256	377.5 to 382.0 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	23	SF	$120	**$2,700**
85213	382.8 to 383.8 feet	**Vertical Change**	-.52"	5 ft	5	SF	$75	**$375**
85214	385.4 to 386.4 feet	**Vertical Change**	.31"	5 ft	5	REF		
85257	386.0 to 396.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	54	SF	$120	**$6,480**
85258	400.6 to 406.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161030	WESTBERRY BVD	SUNSET AVE	KIMMEL AVE	110

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85259	411.0 to 418.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
85260	421.0 to 422.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
85261	424.1 to 425.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
85262	429.3 to 430.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85263	438.3 to 439.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
85264	443.7 to 445.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85215	452.2 to 453.2 feet	**Vertical Change**	.41"	5 ft	5	LF	$75	**$375**
85265	456.2 to 460.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
85216	471.4 to 472.4 feet	**Vertical Change**	-.42"	5 ft	5	LF	$75	**$375**
85266	472.7 to 473.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
85217	487.0 to 488.0 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
85218	490.1 to 491.1 feet	**Vertical Change**	.5"	5 ft	5	SF	$75	**$375**
85219	494.2 to 495.2 feet	**Vertical Change**	1.07"	5 ft	5	REF		
85267	494.2 to 502.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
85220	496.9 to 497.9 feet	**Vertical Change**	.48"	5 ft	5	REF		
85269	501.7 to 503.0 feet		5.0-6.0%	5 ft	7			
85268	503.1 to 504.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **SUNSET AVE** **$161,475.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161212	WESTBERRY BVD	TIMBERLINE DR	500 N WESTBERRY BVD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86331	0.3 to 14.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
86332	17.9 to 22.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
86333	26.6 to 27.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86334	32.7 to 34.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86335	40.7 to 45.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
86336	48.0 to 73.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	130	SF	$120	**$15,540**
86337	77.6 to 78.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
86338	81.9 to 89.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
86329	87.3 to 88.3 feet	**Vertical Change**	.27"	5 ft	5	REF		
86339	91.6 to 107.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	80	SF	$120	**$9,600**
86340	110.3 to 112.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86341	121.0 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	59	SF	$120	**$7,080**
86342	135.2 to 158.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	115	SF	$120	**$13,740**
86330	159.6 to 160.6 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
86343	163.8 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
86344	169.7 to 176.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,780**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **TIMBERLINE DR** **$75,195.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161538	WESTBERRY BVD	TODD ST	STATE ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
88013	0.2 to 5.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	$3,000
88014	7.8 to 10.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	$1,560
88015	21.0 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	58	SF	$120	$6,900
88016	35.2 to 36.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	$600
88017	45.3 to 46.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
88018	47.8 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,500
88019	61.3 to 64.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,740
88020	73.6 to 83.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,120
88021	83.8 to 90.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	$4,020
88022	96.2 to 110.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	71	SF	$120	$8,460
88023	113.7 to 124.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	$6,240
88024	129.9 to 134.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,520
88025	134.3 to 135.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
88026	139.3 to 142.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	$2,100
88027	145.6 to 153.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	$4,800
88028	153.8 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
88029	159.6 to 160.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$720
88030	161.3 to 163.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
88031	165.6 to 168.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	$1,980
88032	171.9 to 179.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	$4,560
88033	181.6 to 184.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,440
88034	184.7 to 188.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	17	SF	$120	$1,980
88035	186.6 to 187.6 feet		5.0-6.0%	5 ft	5			
88012	188.0 to 189.0 feet	Vertical Change	.26"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **TODD ST** **$64,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111301	WESTBERRY BVD	W ALMOND AVE	MERLOT AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91701	0.6 to 5.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
91684	5.8 to 6.8 feet	Vertical Change	.41"	5 ft	5	LF	$75	**$375**
91702	7.6 to 18.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,420**
91685	19.1 to 20.1 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
91703	21.2 to 26.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$2,940**
91704	26.7 to 28.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
91723	33.5 to 54.8 feet	Key Note Segment		5 ft	107			
91705	54.8 to 64.1 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	46	SF	$40	**$1,860**
91706	67.6 to 69.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
91724	69.8 to 87.8 feet	Key Note Segment		5 ft	90			
91686	70.8 to 71.8 feet	Vertical Change	.35"	5 ft	5	REF		
91707	87.8 to 103.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	77	SF	$40	**$3,080**
91687	95.6 to 96.6 feet	Vertical Change	.47"	5 ft	5	REF		
91725	105.9 to 117.3 feet	Key Note Segment		5 ft	57			
91688	118.6 to 119.6 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
91708	120.2 to 125.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
91726	129.9 to 142.1 feet	Key Note Segment		5 ft	61			
91689	130.7 to 131.7 feet	Vertical Change	.37"	5 ft	5	REF		
91709	142.3 to 147.8 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	28	SF	$40	**$1,100**
91690	149.6 to 150.6 feet	Vertical Change	1.34"	5 ft	5	SF	$75	**$375**
91710	150.8 to 152.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
91727	158.5 to 176.9 feet	Key Note Segment		5 ft	92			
91691	167.7 to 168.7 feet	Vertical Change	.41"	5 ft	5	REF		
91711	177.8 to 191.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	69	SF	$120	**$8,220**
91692	178.3 to 179.3 feet	Vertical Change	-.36"	5 ft	5	REF		
91728	194.4 to 213.2 feet	Key Note Segment		5 ft	94			
91712	213.4 to 214.6 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$240**
91693	222.7 to 223.7 feet	Vertical Change	.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201111301	WESTBERRY BVD	W ALMOND AVE	MERLOT AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
91713	223.6 to 224.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
91729	229.8 to 242.1 feet	Key Note Segment		5 ft	62			
91694	230.7 to 231.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
91695	242.8 to 243.8 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
91714	246.6 to 259.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
91730	259.2 to 271.5 feet	Key Note Segment		5 ft	62			
91715	271.5 to 272.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	6	SF	$40	**$240**
91696	272.3 to 273.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
91716	275.8 to 279.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
91717	281.9 to 287.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
91731	288.8 to 307.6 feet	Key Note Segment		5 ft	94			
91697	302.5 to 303.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
91718	308.5 to 318.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	48	SF	$40	**$1,900**
91698	309.1 to 310.1 feet	**Vertical Change**	-.46"	5 ft	5	REF		
91719	318.0 to 325.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,380**
91732	325.3 to 344.4 feet	Key Note Segment		5 ft	96			
91699	326.5 to 327.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
91720	348.1 to 358.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,420**
91721	361.1 to 362.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
91733	362.4 to 374.4 feet	Key Note Segment		5 ft	60			
91722	375.3 to 383.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
91734	380.8 to 382.0 feet		5.0-6.0%	5 ft	6			
91700	382.6 to 383.6 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **W ALMOND AVE** **$67,715.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261208	WESTBERRY BVD	W CLEVELAND AVE	COMMON WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108912	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
108894	1.1 to 2.1 feet	**Vertical Change**	.42"	5 ft	5	REF		
108913	5.1 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
108895	17.7 to 18.7 feet	**Vertical Change**	.34"	5 ft	5	LF	$75	**$375**
108914	22.8 to 31.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	45	SF	$120	**$5,340**
108896	23.8 to 24.8 feet	**Vertical Change**	.31"	5 ft	5	REF		
108897	28.5 to 29.5 feet	**Vertical Change**	.35"	5 ft	5	REF		
108915	34.4 to 42.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$5,040**
108916	45.5 to 50.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
108917	50.8 to 56.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
108898	56.6 to 57.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
108932	65.8 to 67.3 feet		5.0-6.0%	5 ft	8			
108899	66.1 to 67.1 feet	**Vertical Change**	-1.22"	5 ft	5	SF	$75	**$375**
108918	67.5 to 78.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
108919	89.4 to 118.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	146	SF	$120	**$17,520**
108900	118.7 to 119.7 feet	**Vertical Change**	.43"	5 ft	5	LF	$75	**$375**
108901	123.3 to 124.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
108902	127.1 to 128.1 feet	**Vertical Change**	1.1"	5 ft	5	SF	$75	**$375**
108920	132.5 to 147.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,700**
108903	139.9 to 140.9 feet	**Vertical Change**	.46"	5 ft	5	REF		
108904	147.5 to 148.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
108921	153.8 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
108905	155.1 to 156.1 feet	**Vertical Change**	-.37"	5 ft	5	REF		
108922	179.3 to 181.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
108906	185.9 to 186.9 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**
108923	187.3 to 188.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
108924	193.1 to 196.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
108907	204.8 to 205.8 feet	**Vertical Change**	.45"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201261208	WESTBERRY BVD	W CLEVELAND AVE	COMMON WAY	51

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
108925	205.3 to 206.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
108908	210.8 to 211.8 feet	**Vertical Change**	1.26"	5 ft	5	SF	$75	**$375**
108909	212.5 to 213.5 feet	**Vertical Change**	2.18"	5 ft	5	REF		
108926	213.2 to 217.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
108927	221.3 to 242.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,840**
108928	244.9 to 279.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	174	SF	$120	**$20,880**
108929	279.9 to 284.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
108930	284.1 to 292.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,980**
108931	295.2 to 322.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	136	SF	$120	**$16,260**
108910	307.9 to 308.9 feet	**Vertical Change**	-.41"	5 ft	5	REF		
108911	319.2 to 320.2 feet	**Vertical Change**	-.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **W CLEVELAND AVE** **$140,640.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151447	WESTBERRY BVD	WESTGATE DR	CEDAR CREEK LN	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83413	0.8 to 4.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
83414	5.2 to 8.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
83372	7.0 to 8.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
83415	12.4 to 13.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83373	13.3 to 14.3 feet	**Vertical Change**	-.26"	5 ft	5	REF		
83416	14.2 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
83374	18.5 to 19.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
83417	28.7 to 30.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
83375	33.4 to 34.4 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
83418	38.5 to 49.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,360**
83376	39.0 to 40.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
83377	47.9 to 51.7 feet	**Vertical Change**	.37"	5 ft	19	REF		
83419	53.4 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
83378	56.0 to 59.4 feet	**Vertical Change**	.27"	5 ft	17	LF	$75	**$1,275**
83420	60.9 to 74.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
83379	65.1 to 66.1 feet	**Vertical Change**	1.2"	5 ft	5	REF		
83421	77.4 to 79.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,140**
83422	84.0 to 86.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
83423	86.5 to 91.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
83424	97.5 to 101.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
83425	105.6 to 106.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83380	107.2 to 108.2 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
83426	111.2 to 116.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
83427	119.7 to 127.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
83381	129.2 to 130.2 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
83428	132.0 to 154.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	113	SF	$120	**$13,500**
83429	157.4 to 166.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
83382	158.8 to 159.8 feet	**Vertical Change**	1.24"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151447	WESTBERRY BVD	WESTGATE DR	CEDAR CREEK LN	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83383	161.2 to 162.2 feet	Vertical Change	-.3"	5 ft	5	REF		
83384	165.8 to 166.8 feet	Vertical Change	-.26"	5 ft	5	REF		
83430	170.4 to 177.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,200**
83385	175.1 to 176.1 feet	Vertical Change	.68"	5 ft	5	REF		
83386	178.0 to 179.0 feet	Vertical Change	.26"	5 ft	5	LF	$75	**$375**
83431	179.1 to 181.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
83432	185.3 to 188.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
83433	191.8 to 209.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	87	SF	$120	**$10,380**
83387	198.2 to 199.2 feet	Vertical Change	.75"	5 ft	5	REF		
83434	212.3 to 222.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,240**
83388	213.8 to 214.8 feet	Vertical Change	.38"	5 ft	5	LF	$75	**$375**
83389	220.3 to 221.3 feet	Vertical Change	.42"	5 ft	5	REF		
83390	224.0 to 225.0 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
83435	227.2 to 233.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
83391	235.0 to 236.0 feet	Vertical Change	1.08"	5 ft	5	SF	$75	**$375**
83392	240.1 to 241.1 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
83436	245.2 to 246.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
83393	248.6 to 249.6 feet	Vertical Change	-.45"	5 ft	5	LF	$75	**$375**
83394	250.7 to 251.7 feet	Vertical Change	.33"	5 ft	5	LF	$75	**$375**
83437	253.2 to 268.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,420**
83438	271.2 to 273.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
83439	277.1 to 281.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
83440	288.8 to 295.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
83441	298.3 to 312.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
83442	315.3 to 316.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
83443	317.6 to 323.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,780**
83444	324.8 to 328.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
83445	331.3 to 332.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151447	WESTBERRY BVD	WESTGATE DR	CEDAR CREEK LN	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83446	332.4 to 333.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83447	336.1 to 340.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
83448	343.6 to 345.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
83449	354.0 to 359.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
83450	370.4 to 371.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
83451	382.0 to 385.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
83452	390.8 to 410.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,060**
83395	402.0 to 403.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
83453	413.9 to 418.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
83454	420.9 to 428.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
83455	428.6 to 431.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,800**
83456	438.5 to 444.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,300**
83396	442.6 to 443.6 feet	**Vertical Change**	.46"	5 ft	5	REF		
83457	444.0 to 450.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
83397	449.5 to 450.5 feet	**Vertical Change**	.48"	5 ft	5	REF		
83458	450.3 to 455.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
83398	456.1 to 457.1 feet	**Vertical Change**	.4"	5 ft	5	LF	$75	**$375**
83459	457.6 to 459.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
83399	461.8 to 462.8 feet	**Vertical Change**	.29"	5 ft	5	REF		
83460	462.1 to 463.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
83461	466.1 to 469.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
83400	473.1 to 474.1 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
83462	474.3 to 478.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
83463	481.4 to 482.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
83401	481.9 to 482.9 feet	**Vertical Change**	-.29"	5 ft	5	REF		
83402	484.3 to 485.3 feet	**Vertical Change**	.55"	5 ft	5	SF	$75	**$375**
83464	485.7 to 487.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
83465	489.8 to 491.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151447	WESTBERRY BVD	WESTGATE DR	CEDAR CREEK LN	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83466	493.9 to 499.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
83467	507.7 to 516.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	43	SF	$120	**$5,160**
83468	518.4 to 521.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
83469	522.2 to 547.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	128	SF	$120	**$15,360**
83403	551.0 to 552.0 feet	**Vertical Change**	-.3"	5 ft	5	REF		
83470	551.8 to 562.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,600**
83404	556.2 to 557.2 feet	**Vertical Change**	.77"	5 ft	5	REF		
83405	559.5 to 560.5 feet	**Vertical Change**	.4"	5 ft	5	REF		
83471	565.8 to 569.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
83472	569.9 to 580.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	52	SF	$120	**$6,180**
83473	580.3 to 581.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
83474	581.7 to 585.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,220**
83475	587.6 to 590.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
83406	588.6 to 589.6 feet	**Vertical Change**	.72"	5 ft	5	REF		
83476	600.0 to 605.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
83477	606.6 to 612.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,540**
83478	613.8 to 615.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
83479	617.9 to 620.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
83480	621.0 to 629.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	40	SF	$120	**$4,800**
83481	631.1 to 656.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	127	SF	$120	**$15,180**
83407	631.6 to 632.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
83408	634.0 to 635.0 feet	**Vertical Change**	1.63"	5 ft	5	REF		
83409	649.0 to 650.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
83482	656.6 to 659.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
83483	663.7 to 667.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
83484	670.1 to 681.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	57	SF	$120	**$6,780**
83410	674.5 to 675.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
83485	682.0 to 683.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151447	WESTBERRY BVD	WESTGATE DR	CEDAR CREEK LN	89

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83411	682.5 to 683.5 feet	Vertical Change	.31"	5 ft	5	REF		
83486	687.0 to 689.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
83487	692.6 to 697.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,640**
83488	699.5 to 705.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
83412	707.8 to 708.8 feet	Vertical Change	-.29"	5 ft	5	REF		
83489	708.8 to 719.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
83490	721.3 to 722.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
83491	722.8 to 730.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
83492	732.8 to 740.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,860**

TOTAL COST FOR: E *side of* **WESTBERRY BVD** *Starting at:* **WESTGATE DR** **$289,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151609	WESTBERRY BVD	WESTGATE DR	SUMMER LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84517	0.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
84518	6.8 to 8.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,140**
84519	15.1 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
84520	17.8 to 18.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
84521	22.6 to 25.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,740**
84522	31.5 to 34.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,980**
84523	40.8 to 42.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
84524	53.0 to 55.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
84511	53.7 to 54.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
84525	57.3 to 67.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,180**
84526	67.6 to 68.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84527	73.9 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
84528	78.4 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
84512	89.8 to 90.8 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
84529	92.1 to 94.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,320**
84530	94.3 to 96.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	13	SF	$120	**$1,560**
84513	95.0 to 96.0 feet	**Vertical Change**	-.39"	5 ft	5	REF		
84531	97.2 to 106.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	48	SF	$120	**$5,760**
84514	100.8 to 101.8 feet	**Vertical Change**	-.28"	5 ft	5	REF		
84532	109.7 to 116.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	34	SF	$120	**$4,080**
84533	117.3 to 128.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	54	SF	$120	**$6,480**
84515	128.8 to 129.8 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
84534	130.4 to 132.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
84535	134.8 to 141.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	34	SF	$120	**$4,140**
84516	139.5 to 140.5 feet	**Vertical Change**	-.33"	5 ft	5	REF		
84536	143.3 to 144.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
84537	147.3 to 148.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$780**
84538	151.3 to 152.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151609	WESTBERRY BVD	WESTGATE DR	SUMMER LN	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84539	154.3 to 155.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84540	159.3 to 167.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
84541	163.9 to 167.1 feet		5.0-6.0%	5 ft	16			
84542	163.9 to 167.1 feet	Running Slope	5.0-6.0%	5 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: W *side of* **WESTBERRY BVD** *Starting at:* **WESTGATE DR** **$59,850.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151423	WESTGATE DR	3119 WESTGATE DR	TIMBERLINE DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83173	2.6 to 6.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
83174	9.8 to 14.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,760**
83175	18.2 to 22.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
83176	25.8 to 31.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,240**
83177	33.3 to 42.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	44	SF	$120	**$5,220**
83178	42.0 to 58.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	83	SF	$120	**$9,900**
83163	48.2 to 49.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
83203	60.3 to 78.9 feet	Key Note Segment		5 ft	93			
83179	80.1 to 81.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
83204	84.3 to 104.4 feet	Key Note Segment		5 ft	101			
83180	110.2 to 112.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
83181	113.7 to 127.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,460**
83182	130.8 to 143.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	64	SF	$120	**$7,680**
83183	149.8 to 160.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
83164	151.2 to 152.2 feet	**Vertical Change**	.42"	5 ft	5	REF		
83205	165.7 to 184.5 feet	Key Note Segment		5 ft	94			
83165	166.6 to 167.6 feet	**Vertical Change**	-.48"	5 ft	5	REF		
83184	185.3 to 188.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
83206	190.4 to 209.7 feet	Key Note Segment		5 ft	97			
83166	207.6 to 208.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
83185	210.3 to 215.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	25	SF	$40	**$1,000**
83186	216.1 to 218.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
83187	219.2 to 222.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,160**
83188	223.0 to 227.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
83189	227.8 to 230.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**
83167	228.9 to 229.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
83190	238.7 to 242.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
83191	245.1 to 247.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151423	WESTGATE DR	3119 WESTGATE DR	TIMBERLINE DR	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83192	251.8 to 260.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	43	SF	$120	**$5,160**
83193	263.2 to 269.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
83207	269.7 to 288.4 feet	Key Note Segment		5 ft	93			
83168	270.0 to 271.0 feet	**Vertical Change**	1.99"	5 ft	5	REF		
83169	279.6 to 280.6 feet	**Vertical Change**	.29"	5 ft	5	REF		
83194	288.4 to 289.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	7	SF	$40	**$280**
83195	289.8 to 293.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
83208	294.1 to 312.2 feet	Key Note Segment		5 ft	90			
83196	312.8 to 314.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
83197	318.4 to 320.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
83198	323.3 to 334.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,600**
83170	326.2 to 327.2 feet	**Vertical Change**	.52"	5 ft	5	REF		
83199	340.0 to 341.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
83200	344.3 to 346.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
83209	346.5 to 370.4 feet	Key Note Segment		5 ft	120			
83171	358.4 to 359.4 feet	**Vertical Change**	.42"	5 ft	5	REF		
83201	370.7 to 377.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,900**
83172	373.9 to 374.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
83202	381.1 to 382.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**

TOTAL COST FOR: N *side of* **WESTGATE DR** *Starting at:* **3119 WESTGATE DR** **$93,080.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151607	WESTGATE DR	KENT DR	WESTBERRY BVD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84452	0.6 to 12.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,320**
84413	10.2 to 11.2 feet	**Vertical Change**	1.5"	5 ft	5	REF		
84502	21.2 to 23.2 feet		5.0-6.0%	5 ft	10			
84492	24.0 to 37.9 feet	Key Note Segment		5 ft	70			
84414	24.2 to 25.2 feet	**Vertical Change**	-.95"	5 ft	5	REF		
84415	34.3 to 35.3 feet	**Vertical Change**	-.29"	5 ft	5	REF		
84453	37.9 to 39.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**
84454	44.2 to 51.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
84493	51.9 to 65.4 feet	Key Note Segment		5 ft	68			
84416	60.0 to 61.0 feet	**Vertical Change**	-.31"	5 ft	5	REF		
84417	64.1 to 65.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
84418	66.1 to 67.1 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
84503	69.8 to 70.8 feet		9.0-10.0%	5 ft	5			
84419	70.3 to 71.3 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
84504	71.5 to 72.8 feet		7.0-8.0%	5 ft	7			
84455	72.0 to 75.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
84420	76.6 to 77.6 feet	**Vertical Change**	-2.27"	5 ft	5	SF	$75	**$375**
84505	78.2 to 79.2 feet		12.0-13.0%	5 ft	5			
84421	78.7 to 79.7 feet	**Vertical Change**	-.37"	5 ft	5	LF	$75	**$375**
84456	81.7 to 86.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
84422	87.8 to 88.8 feet	**Vertical Change**	-.47"	5 ft	5	LF	$75	**$375**
84457	92.4 to 94.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,080**
84458	96.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84459	103.2 to 106.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
84460	107.1 to 108.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84423	116.3 to 117.3 feet	**Vertical Change**	.3"	5 ft	5	REF		
84461	116.3 to 117.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84424	120.3 to 121.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151607	WESTGATE DR	KENT DR	WESTBERRY BVD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84462	120.7 to 124.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
84425	122.7 to 123.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
84494	126.9 to 141.4 feet	Key Note Segment		5 ft	73			
84426	129.6 to 130.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
84427	134.0 to 135.0 feet	**Vertical Change**	-.37"	5 ft	5	REF		
84463	141.4 to 153.3 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	60	SF	$40	**$2,380**
84506	148.1 to 149.2 feet		5.0-6.0%	5 ft	5			
84428	149.2 to 150.2 feet	**Vertical Change**	-.33"	5 ft	5	REF		
84495	153.9 to 168.6 feet	Key Note Segment		5 ft	74			
84429	172.2 to 173.2 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
84464	186.0 to 187.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
84430	189.6 to 190.6 feet	**Vertical Change**	.31"	5 ft	5	LF	$75	**$375**
84431	197.3 to 198.3 feet	**Vertical Change**	-.33"	5 ft	5	LF	$75	**$375**
84465	200.7 to 201.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
84466	204.4 to 216.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,500**
84432	205.0 to 206.0 feet	**Vertical Change**	3.53"	5 ft	5	REF		
84507	209.6 to 210.8 feet		5.0-6.0%	5 ft	6			
84467	221.2 to 224.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
84468	227.5 to 231.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
84496	232.2 to 245.5 feet	Key Note Segment		5 ft	67			
84433	245.4 to 246.4 feet	**Vertical Change**	1.45"	5 ft	5	REF		
84469	245.5 to 246.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	7	SF	$40	**$280**
84470	248.8 to 252.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
84471	252.8 to 254.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$720**
84472	257.1 to 258.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$660**
84497	258.2 to 272.3 feet	Key Note Segment		5 ft	71			
84473	272.3 to 285.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	66	SF	$40	**$2,640**
84474	286.3 to 288.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151607	WESTGATE DR	KENT DR	WESTBERRY BVD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84475	290.3 to 298.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
84476	298.3 to 299.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
84477	301.3 to 302.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84434	302.8 to 303.8 feet	**Vertical Change**	.61"	5 ft	5	REF		
84478	305.2 to 306.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
84479	308.3 to 309.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
84480	310.4 to 311.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
84435	320.1 to 321.1 feet	**Vertical Change**	.41"	5 ft	5	REF		
84481	320.1 to 321.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$780**
84498	333.8 to 347.9 feet	Key Note Segment		5 ft	71			
84482	348.4 to 356.9 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	43	SF	$40	**$1,700**
84483	356.9 to 360.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
84499	360.7 to 374.4 feet	Key Note Segment		5 ft	69			
84436	362.3 to 363.3 feet	**Vertical Change**	-.38"	5 ft	5	REF		
84437	365.7 to 366.7 feet	**Vertical Change**	.38"	5 ft	5	REF		
84438	375.1 to 376.1 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
84484	382.4 to 383.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
84485	386.3 to 387.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
84439	388.0 to 389.0 feet	**Vertical Change**	-.39"	5 ft	5	LF	$75	**$375**
84486	397.4 to 398.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84487	399.9 to 401.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
84488	410.8 to 411.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84489	414.7 to 415.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84490	422.2 to 433.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,720**
84441	433.9 to 434.9 feet	**Vertical Change**	.33"	5 ft	5	LF	$75	**$375**
84500	434.3 to 449.3 feet	Key Note Segment		5 ft	75			
84442	444.7 to 445.7 feet	**Vertical Change**	.33"	5 ft	5	REF		
84491	450.6 to 460.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151607	WESTGATE DR	KENT DR	WESTBERRY BVD	77

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84443	456.7 to 457.7 feet	Vertical Change	.34"	5 ft	5	REF		
84501	461.3 to 475.6 feet	Key Note Segment		5 ft	72			
84444	478.1 to 479.1 feet	Vertical Change	.67"	5 ft	5	SF	$75	**$375**
84445	482.2 to 483.2 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
84446	483.9 to 488.4 feet	Vertical Change	.44"	5 ft	23	LF	$75	**$1,688**
84508	487.5 to 488.8 feet		5.0-6.0%	5 ft	7			
84509	489.4 to 490.9 feet		7.0-8.0%	5 ft	8			
84447	490.5 to 491.5 feet	Vertical Change	.48"	5 ft	5	LF	$75	**$375**
84448	492.4 to 493.4 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
84449	494.4 to 495.4 feet	Vertical Change	.27"	5 ft	5	LF	$75	**$375**
84450	501.9 to 502.9 feet	Vertical Change	3.02"	5 ft	5	SF	$75	**$375**
84510	504.0 to 505.6 feet		8.0-9.0%	5 ft	8			
84451	504.1 to 505.1 feet	Vertical Change	3.31"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **WESTGATE DR** *Starting at:* **KENT DR** **$86,217.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151426	WESTGATE DR	TIMBERLINE DR	WESTBERRY BVD	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83227	4.8 to 7.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
83228	13.8 to 17.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
83229	17.3 to 27.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$6,000**
83230	27.3 to 36.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,520**
83231	39.5 to 42.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
83232	45.1 to 48.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
83233	54.3 to 55.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
83234	58.7 to 61.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
83235	62.7 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
83236	65.2 to 66.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
83237	68.3 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83238	74.0 to 80.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,660**
83239	79.2 to 80.4 feet		5.0-6.0%	5 ft	6			

TOTAL COST FOR: N *side of* **WESTGATE DR** *Starting at:* **TIMBERLINE DR** **$27,720.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151420	WESTGATE DR	TIMBERLINE DR	3120 WESTGATE DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83131	5.8 to 7.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
83132	7.3 to 14.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
83133	24.6 to 25.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
83157	26.9 to 46.9 feet	Key Note Segment		5 ft	100			
83158	51.7 to 70.8 feet	Key Note Segment		5 ft	96			
83134	70.8 to 75.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	23	SF	$40	**$920**
83135	78.0 to 95.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
83136	98.9 to 101.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
83137	103.8 to 115.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	**$6,900**
83138	115.3 to 117.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
83139	118.9 to 122.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
83140	123.0 to 124.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83141	126.8 to 133.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	36	SF	$120	**$4,260**
83159	133.9 to 153.2 feet	Key Note Segment		5 ft	96			
83142	153.7 to 157.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
83160	158.0 to 177.7 feet	Key Note Segment		5 ft	99			
83143	178.2 to 179.3 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	6	SF	$40	**$220**
83124	183.3 to 184.3 feet	Vertical Change	.32"	5 ft	5	LF	$75	**$375**
83144	184.9 to 185.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
83125	190.8 to 191.8 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
83127	195.5 to 196.5 feet	Vertical Change	.85"	5 ft	5	SF	$75	**$375**
83128	200.5 to 201.5 feet	Vertical Change	3.48"	5 ft	5	SF	$75	**$375**
83145	204.1 to 205.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
83146	205.9 to 209.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
83147	215.8 to 219.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
83148	228.0 to 231.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
83161	241.3 to 259.9 feet	Key Note Segment		5 ft	93			
83129	259.0 to 260.0 feet	Vertical Change	.7"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151420	WESTGATE DR	TIMBERLINE DR	3120 WESTGATE DR	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83149	259.9 to 265.2 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	27	SF	$40	$1,060
83162	265.2 to 283.8 feet	Key Note Segment		5 ft	93			
83150	285.0 to 287.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	$1,740
83151	290.8 to 293.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	$1,560
83152	295.8 to 315.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	98	SF	$120	$11,700
83130	301.7 to 302.7 feet	Vertical Change	.42"	5 ft	5	REF		
83153	319.0 to 322.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
83154	324.7 to 325.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	$660
83155	329.0 to 332.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	$2,280
83156	336.9 to 347.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	$6,060

TOTAL COST FOR: S *side of* **WESTGATE DR** *Starting at:* **TIMBERLINE DR** **$73,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151548	WESTGATE DR	WESTBERRY BVD	KENT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84128	1.2 to 11.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
84129	11.5 to 13.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
84094	13.2 to 14.2 feet	**Vertical Change**	1.18"	5 ft	5	SF	$75	**$375**
84130	16.2 to 18.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
84131	19.1 to 20.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$900**
84132	25.2 to 26.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
84170	27.3 to 42.0 feet	Key Note Segment		5 ft	74			
84133	43.6 to 44.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
84134	47.0 to 54.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
84171	55.2 to 69.4 feet	Key Note Segment		5 ft	71			
84135	69.6 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
84136	74.3 to 79.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	25	SF	$120	**$2,940**
84095	80.5 to 81.5 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
84137	86.4 to 88.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
84138	92.1 to 99.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,620**
84139	101.6 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
84096	104.1 to 105.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
84140	108.0 to 110.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	15	SF	$120	**$1,740**
84141	126.3 to 130.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,340**
84172	130.9 to 145.6 feet	Key Note Segment		5 ft	74			
84097	132.3 to 133.3 feet	**Vertical Change**	.34"	5 ft	5	REF		
84098	139.5 to 140.5 feet	**Vertical Change**	-.27"	5 ft	5	REF		
84142	150.2 to 151.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
84173	156.3 to 170.8 feet	Key Note Segment		5 ft	72			
84099	157.7 to 158.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
84143	175.3 to 176.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
84144	176.8 to 191.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
84100	205.7 to 206.7 feet	**Vertical Change**	.28"	5 ft	5	LF	$75	**$375**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151548	WESTGATE DR	WESTBERRY BVD	KENT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84145	208.3 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
84101	209.7 to 212.7 feet	**Vertical Change**	.39"	5 ft	15	REF		
84146	214.4 to 224.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,880**
84102	218.1 to 221.7 feet	**Vertical Change**	.3"	5 ft	18	REF		
84103	222.4 to 223.4 feet	**Vertical Change**	-.53"	5 ft	5	REF		
84181	223.9 to 225.0 feet		5.0-6.0%	5 ft	6			
84104	224.3 to 225.3 feet	**Vertical Change**	.3"	5 ft	5	LF	$75	**$375**
84147	227.1 to 229.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
84105	227.6 to 230.7 feet	**Vertical Change**	.28"	5 ft	16	REF		
84148	229.3 to 230.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
84106	231.6 to 234.3 feet	**Vertical Change**	1.05"	5 ft	14	SF	$75	**$1,013**
84107	235.9 to 238.6 feet	**Vertical Change**	.35"	5 ft	14	LF	$75	**$1,013**
84174	236.1 to 251.4 feet	Key Note Segment		5 ft	77			
84108	239.6 to 240.6 feet	**Vertical Change**	.7"	5 ft	5	REF		
84109	241.4 to 242.4 feet	**Vertical Change**	3.56"	5 ft	5	REF		
84110	243.1 to 250.4 feet	**Vertical Change**	.26"	5 ft	37	REF		
84111	251.3 to 254.5 feet	**Vertical Change**	-.29"	5 ft	16	REF		
84149	251.6 to 256.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
84150	256.0 to 259.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
84112	257.1 to 258.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
84113	259.8 to 263.0 feet	**Vertical Change**	.67"	5 ft	16	SF	$75	**$1,200**
84175	262.9 to 275.8 feet	Key Note Segment		5 ft	65			
84114	270.2 to 271.2 feet	**Vertical Change**	.4"	5 ft	5	REF		
84151	278.0 to 291.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	67	SF	$120	**$7,980**
84115	278.3 to 279.3 feet	**Vertical Change**	.4"	5 ft	5	REF		
84152	291.5 to 305.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,100**
84153	307.5 to 312.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
84154	314.0 to 323.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151548	WESTGATE DR	WESTBERRY BVD	KENT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84182	315.6 to 316.6 feet		6.0-7.0%	5 ft	5			
84116	316.6 to 317.6 feet	Vertical Change	.3"	5 ft	5	REF		
84155	329.4 to 337.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
84176	344.3 to 358.2 feet	Key Note Segment		5 ft	70			
84156	362.7 to 364.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
84177	368.4 to 382.7 feet	Key Note Segment		5 ft	72			
84117	390.2 to 391.2 feet	Vertical Change	.41"	5 ft	5	LF	$75	**$375**
84183	391.5 to 392.8 feet		9.0-10.0%	5 ft	7			
84118	395.5 to 396.5 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
84119	401.3 to 402.3 feet	Vertical Change	-.26"	5 ft	5	LF	$75	**$375**
84122	411.4 to 412.4 feet	Vertical Change	-.28"	5 ft	5	LF	$75	**$375**
84157	413.0 to 416.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
84123	416.3 to 417.3 feet	Vertical Change	-.3"	5 ft	5	REF		
84158	417.2 to 420.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,860**
84124	418.4 to 419.4 feet	Vertical Change	.31"	5 ft	5	REF		
84159	420.8 to 429.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$4,980**
84125	424.5 to 425.5 feet	Vertical Change	.3"	5 ft	5	REF		
84160	432.8 to 445.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	61	SF	$120	**$7,320**
84126	434.0 to 435.0 feet	Vertical Change	-.34"	5 ft	5	REF		
84178	445.0 to 459.7 feet	Key Note Segment		5 ft	74			
84127	454.1 to 455.1 feet	Vertical Change	.29"	5 ft	5	REF		
84161	461.1 to 463.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
84162	468.8 to 470.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
84179	470.8 to 488.0 feet	Key Note Segment		5 ft	86			
84163	488.7 to 489.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
84164	491.0 to 492.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
84165	493.7 to 510.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	85	SF	$120	**$10,200**
84166	513.4 to 516.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151548	WESTGATE DR	WESTBERRY BVD	KENT DR	73

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84167	521.4 to 523.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
84180	525.0 to 547.3 feet	Key Note Segment		5 ft	111			
84168	548.9 to 549.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
84169	556.1 to 559.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **WESTGATE DR** *Starting at:* **WESTBERRY BVD** **$131,025.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151428	WESTGATE DR	WESTBERRY BVD	TIMBERLINE DR	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
83243	0.3 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
83240	19.8 to 20.8 feet	**Vertical Change**	-.27"	5 ft	5	REF		
83244	19.9 to 21.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
83245	24.3 to 35.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	55	SF	$120	**$6,600**
83246	35.3 to 48.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
83247	49.0 to 51.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,380**
83248	53.5 to 55.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
83249	62.8 to 65.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
83250	69.9 to 71.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
83241	71.0 to 72.0 feet	**Vertical Change**	.42"	5 ft	5	REF		
83251	72.2 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
83242	80.6 to 81.6 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
83252	82.8 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
83253	83.7 to 85.4 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: S *side of* **WESTGATE DR** *Starting at:* **WESTBERRY BVD** **$33,315.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131423	WILLIAMS AVE	1688 WILLIAMS AVE	UNIVERSITY AVE	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98312	2.3 to 19.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	87	SF	$120	**$10,380**
98313	23.0 to 27.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
98309	24.5 to 25.5 feet	**Vertical Change**	.51"	5 ft	5	REF		
98314	29.7 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
98315	40.4 to 42.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
98310	40.9 to 41.9 feet	**Vertical Change**	-.28"	5 ft	5	REF		
98316	46.8 to 49.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
98317	51.6 to 57.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,720**
98318	60.9 to 67.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	32	SF	$120	**$3,780**
98319	67.2 to 91.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	120	SF	$120	**$14,340**
98311	91.1 to 92.1 feet	**Vertical Change**	.26"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **1688 WILLIAMS AVE** **$38,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241357	WILLIAMS AVE	1801 HOWARD RD	HOWARD RD	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107397	0.0 to 1.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
107398	1.2 to 2.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
107401	10.0 to 31.7 feet	Key Note Segment		5 ft	109			
107396	17.7 to 18.7 feet	**Vertical Change**	.61"	5 ft	5	REF		
107399	41.8 to 58.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
107400	66.8 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **1801 HOWARD RD** **$14,700.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241536	WILLIAMS AVE	526 WILLIAMS AVE	526 WILLIAMS AVE	72

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107466	0.4 to 1.4 feet	Vertical Change	-.31"	5 ft	5	LF	$75	$375
107474	0.8 to 14.7 feet	Key Note Segment		5 ft	70			
107469	16.8 to 19.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	$1,560
107467	20.5 to 21.5 feet	Vertical Change	.26"	5 ft	5	LF	$75	$375
107470	21.8 to 23.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	$1,140
107471	25.8 to 28.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	$1,800
107472	29.8 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	$3,780
107468	30.3 to 31.3 feet	Vertical Change	-.27"	5 ft	5	REF		
107475	36.5 to 54.9 feet	Key Note Segment		5 ft	92			
107473	56.7 to 60.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	$1,980

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **526 WILLIAMS AVE** **$11,010.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241538	WILLIAMS AVE	529 WILLIAMS AVE	SUNSET AVE	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107476	0.0 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	42	SF	$120	**$5,040**
107477	8.4 to 58.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	251	SF	$120	**$30,060**
107478	59.3 to 62.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,680**

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **529 WILLIAMS AVE** **$36,780.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241349	WILLIAMS AVE	FIFTH ST	211 WILLIAMS AVE	60

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107390	0.1 to 1.1 feet	Vertical Change	-.47"	4 ft	4	LF	$75	**$300**
107393	55.8 to 71.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,392**
107394	74.9 to 82.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
107395	82.7 to 94.9 feet	Key Note Segment		4 ft	49			
107391	102.6 to 103.6 feet	Vertical Change	.62"	4 ft	4	SF	$75	**$300**
107392	107.5 to 108.5 feet	Vertical Change	-.49"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **FIFTH ST** **$12,036.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201241344	WILLIAMS AVE	HOWARD RD	109 WILLIAMS AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107364	1.8 to 3.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
107365	6.8 to 48.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	208	SF	$120	**$24,900**
107366	51.0 to 55.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
107367	58.3 to 63.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,180**
107368	65.0 to 87.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	111	SF	$120	**$13,260**
107377	75.0 to 76.0 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
107356	77.3 to 78.3 feet	Vertical Change	.29"	5 ft	5	REF		
107357	82.0 to 83.0 feet	Vertical Change	-.29"	5 ft	5	REF		
107369	89.3 to 102.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	67	SF	$120	**$8,040**
107370	106.3 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
107358	110.7 to 111.7 feet	Vertical Change	.26"	5 ft	5	REF		
107376	113.8 to 131.8 feet	Key Note Segment		5 ft	90			
107359	123.5 to 124.5 feet	Vertical Change	-.3"	5 ft	5	REF		
107371	132.1 to 162.3 feet	Cross Slope (Driveway)	2.0-3.0%	5 ft	151	SF	$40	**$6,040**
107360	132.2 to 133.2 feet	Vertical Change	1.25"	5 ft	5	REF		
107372	163.9 to 188.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	123	SF	$120	**$14,700**
107378	168.4 to 169.4 feet	Protruding Object	72"	5 ft	5	JOB	$99	**$99**
107361	173.9 to 174.9 feet	Vertical Change	.34"	5 ft	5	REF		
107373	190.5 to 198.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
107362	197.5 to 198.5 feet	Vertical Change	.3"	5 ft	5	REF		
107374	198.5 to 203.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
107375	208.3 to 215.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **HOWARD RD** **$90,118.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131459	WILLIAMS AVE	JEFFERSON AVE	PRINCETON AVE	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98764	1.0 to 2.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
98765	7.3 to 17.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$6,000**
98766	21.7 to 27.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
98767	28.3 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
98768	32.4 to 36.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
98759	36.8 to 37.8 feet	**Vertical Change**	.33"	5 ft	5	REF		
98769	46.8 to 51.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
98770	54.8 to 62.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
98771	64.7 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**
98772	74.4 to 76.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
98760	74.6 to 75.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
98773	78.3 to 83.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**
98774	85.3 to 104.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	96	SF	$120	**$11,460**
98761	86.0 to 87.0 feet	**Vertical Change**	-.38"	5 ft	5	REF		
98775	106.9 to 109.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
98776	109.6 to 122.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
98762	119.3 to 120.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
98777	128.4 to 139.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
98763	135.8 to 136.8 feet	**Vertical Change**	-.3"	5 ft	5	REF		
98778	139.5 to 144.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
98779	150.0 to 151.9 feet		5.0-6.0%	5 ft	10			

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **JEFFERSON AVE** **$60,060.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241630	WILLIAMS AVE	NATIONAL AVE	THIRD ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107637	1.8 to 6.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
107638	8.8 to 32.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	118	SF	$120	**$14,220**
107618	33.2 to 34.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
107639	36.1 to 39.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
107619	41.9 to 42.9 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
107640	45.5 to 52.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
107641	59.1 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
107667	65.2 to 83.3 feet	Key Note Segment		5 ft	91			
107620	81.4 to 84.1 feet	**Vertical Change**	-.34"	5 ft	13	REF		
107642	87.8 to 104.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
107643	131.4 to 132.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
107644	139.9 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,840**
107621	154.7 to 155.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
107668	156.3 to 168.8 feet	Key Note Segment		5 ft	62			
107622	167.7 to 168.7 feet	**Vertical Change**	-.3"	5 ft	5	REF		
107645	170.4 to 173.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,560**
107646	187.5 to 195.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
107623	193.5 to 194.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
107647	202.4 to 205.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
107648	207.8 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
107669	209.8 to 222.5 feet	Key Note Segment		5 ft	64			
107649	224.4 to 225.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
107650	228.0 to 251.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
107626	240.7 to 241.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
107651	253.3 to 254.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
107670	255.5 to 266.9 feet	Key Note Segment		5 ft	57			
107627	256.7 to 257.7 feet	**Vertical Change**	-.31"	5 ft	5	REF		
107628	265.9 to 266.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201241630	WILLIAMS AVE	NATIONAL AVE	THIRD ST	44

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
107652	268.8 to 270.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
107653	278.1 to 282.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,820**
107629	280.4 to 281.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
107654	291.8 to 297.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
107655	300.9 to 302.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
107656	308.2 to 311.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
107671	311.8 to 324.3 feet	Key Note Segment		5 ft	63			
107657	329.6 to 352.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	114	SF	$120	**$13,680**
107658	360.4 to 361.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
107672	365.4 to 382.3 feet	Key Note Segment		5 ft	85			
107659	385.4 to 397.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
107632	386.0 to 387.0 feet	**Vertical Change**	-.34"	5 ft	5	REF		
107633	399.7 to 400.7 feet	**Vertical Change**	-.3"	5 ft	5	LF	$75	**$375**
107660	403.1 to 423.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	104	SF	$120	**$12,480**
107673	423.9 to 443.4 feet	Key Note Segment		5 ft	98			
107634	424.5 to 425.5 feet	**Vertical Change**	.64"	5 ft	5	REF		
107635	442.4 to 443.4 feet	**Vertical Change**	-.42"	5 ft	5	REF		
107661	445.6 to 458.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
107662	460.5 to 461.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
107636	463.5 to 464.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
107663	465.6 to 479.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,340**
107664	482.1 to 485.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
107665	488.0 to 491.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,340**
107666	496.6 to 510.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	71	SF	$120	**$8,520**

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **NATIONAL AVE** **$146,460.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131518	WILLIAMS AVE	PRINCETON AVE	JEFFERSON AVE	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
99048	1.8 to 3.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
99049	3.0 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,280**
99050	17.7 to 23.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	27	SF	$120	**$3,180**
99051	23.4 to 30.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
99041	23.6 to 24.6 feet	**Vertical Change**	.44"	5 ft	5	REF		
99052	34.0 to 35.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
99053	37.4 to 46.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	47	SF	$120	**$5,640**
99042	38.9 to 39.9 feet	**Vertical Change**	1.98"	5 ft	5	REF		
99054	48.1 to 51.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
99055	51.8 to 76.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	124	SF	$120	**$14,820**
99056	77.3 to 99.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	113	SF	$120	**$13,560**
99057	100.2 to 101.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
99044	111.5 to 112.5 feet	**Vertical Change**	1.21"	5 ft	5	SF	$75	**$375**
99045	118.5 to 119.5 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
99058	119.6 to 127.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,740**
99046	129.0 to 130.0 feet	**Vertical Change**	.83"	5 ft	5	SF	$75	**$375**
99059	130.1 to 132.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
99062	132.5 to 133.6 feet		5.0-6.0%	5 ft	6			
99047	133.3 to 134.3 feet	**Vertical Change**	-.85"	5 ft	5	SF	$75	**$375**
99060	138.2 to 140.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
99061	144.7 to 149.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **PRINCETON AVE** **$66,840.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131505	WILLIAMS AVE	PRINCETON AVE	UNIVERSITY AVE	56

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98842	0.0 to 18.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	93	SF	$120	**$11,160**
98843	27.9 to 29.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
98844	32.7 to 33.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
98838	32.9 to 33.9 feet	**Vertical Change**	.6"	5 ft	5	REF		
98845	35.3 to 51.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
98839	39.1 to 40.1 feet	**Vertical Change**	-.32"	5 ft	5	REF		
98846	55.0 to 56.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$600**
98847	56.0 to 60.0 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,400**
98848	62.3 to 63.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
98849	63.3 to 64.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$900**
98850	67.8 to 69.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
98840	68.1 to 69.1 feet	**Vertical Change**	.3"	5 ft	5	REF		
98851	72.0 to 73.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
98852	75.2 to 77.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
98858	78.3 to 88.3 feet	Key Note Segment		5 ft	50			
98853	88.7 to 97.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,280**
98854	99.6 to 103.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
98855	106.8 to 114.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
98841	117.8 to 118.8 feet	**Vertical Change**	-.43"	5 ft	5	LF	$75	**$375**
98856	121.9 to 125.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
98857	130.9 to 151.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	101	SF	$120	**$12,180**

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **PRINCETON AVE** **$56,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131507	WILLIAMS AVE	UNIVERSITY AVE	PRINCETON AVE	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98866	1.7 to 6.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
98867	10.9 to 18.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
98868	21.8 to 29.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
98859	27.6 to 28.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
98869	40.8 to 53.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
98860	45.0 to 46.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
98870	56.3 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	167	SF	$120	**$19,980**
98861	63.3 to 64.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
98862	77.1 to 78.1 feet	**Vertical Change**	-.29"	5 ft	5	REF		
98871	89.6 to 97.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,680**
98872	98.1 to 106.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
98873	110.1 to 113.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
98874	114.9 to 117.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	12	SF	$120	**$1,440**
98863	115.5 to 116.5 feet	**Vertical Change**	.58"	5 ft	5	REF		
98875	119.1 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
98876	122.8 to 125.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
98864	127.2 to 128.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
98877	129.6 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
98878	135.8 to 138.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
98879	142.8 to 146.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
98865	145.0 to 146.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
98880	150.8 to 151.8 feet		5.0-6.0%	5 ft	5			

TOTAL COST FOR: E *side of* **WILLIAMS AVE** *Starting at:* **UNIVERSITY AVE** **$59,955.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131421	WILLIAMS AVE	UNIVERSITY AVE	824 WILLIAMS AVE	55

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98304	0.0 to 1.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
98305	5.4 to 27.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	108	SF	$120	**$12,960**
98306	27.8 to 30.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
98307	32.4 to 49.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	85	SF	$120	**$10,200**
98302	47.3 to 48.3 feet	**Vertical Change**	.43"	5 ft	5	REF		
98308	51.1 to 67.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
98303	73.6 to 74.6 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **WILLIAMS AVE** *Starting at:* **UNIVERSITY AVE** **$35,835.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2201131430	WILLIS AVE	1564 WILLIAMS AVE	UNIVERSITY AVE	67

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98374	0.4 to 15.2 feet	Key Note Segment		5 ft	74			
98365	15.2 to 20.9 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	29	SF	$40	$1,140
98362	15.4 to 16.4 feet	Vertical Change	.28"	5 ft	5	REF		
98366	25.9 to 29.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	$2,340
98363	26.5 to 27.5 feet	Vertical Change	-.63"	5 ft	5	REF		
98367	35.5 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	129	SF	$120	$15,480
98368	61.8 to 65.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
98369	65.2 to 69.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	$2,340
98370	71.3 to 73.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	$1,200
98371	75.6 to 79.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	$2,040
98372	79.0 to 83.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	$2,460
98373	83.3 to 93.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	$6,000
98375	89.9 to 92.2 feet		5.0-6.0%	5 ft	12			
98376	89.9 to 92.2 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	$1,380
98364	93.1 to 94.1 feet	Vertical Change	-.32"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WILLIS AVE** *Starting at:* **1564 WILLIAMS AVE** **$36,420.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2201131428	WILLIS AVE	UNIVERSITY AVE	824 WILLIS AVE	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
98353	0.0 to 6.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	33	SF	$120	**$3,960**
98354	6.6 to 28.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	109	SF	$120	**$13,020**
98355	28.3 to 36.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	42	SF	$120	**$4,980**
98351	34.6 to 35.6 feet	**Vertical Change**	.35"	5 ft	5	REF		
98356	36.6 to 44.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	42	SF	$120	**$4,980**
98357	47.2 to 53.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
98358	53.0 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
98360	64.6 to 86.4 feet	Key Note Segment		5 ft	109			
98359	86.7 to 89.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,860**
98352	86.8 to 87.8 feet	**Vertical Change**	.27"	5 ft	5	REF		
98361	88.4 to 89.9 feet		5.0-6.0%	5 ft	8			

TOTAL COST FOR: W *side of* **WILLIS AVE** *Starting at:* **UNIVERSITY AVE** **$33,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111601	WILLOW CT	VALLEY WAY	VALLEY WAY	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93112	6.0 to 33.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	136	SF	$120	**$16,380**
93113	34.5 to 50.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
93114	50.3 to 70.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
93136	70.9 to 94.2 feet	Key Note Segment		5 ft	116			
93105	72.5 to 73.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
93115	95.7 to 103.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	39	SF	$120	**$4,680**
93106	97.0 to 98.0 feet	**Vertical Change**	-.26"	5 ft	5	REF		
93116	103.5 to 120.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,320**
93107	109.2 to 110.2 feet	**Vertical Change**	.27"	5 ft	5	REF		
93137	124.4 to 142.7 feet	Key Note Segment		5 ft	91			
93117	144.2 to 149.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
93118	150.8 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
93119	154.9 to 159.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
93108	162.6 to 163.6 feet	**Vertical Change**	-.33"	5 ft	5	REF		
93120	162.8 to 163.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
93121	166.2 to 167.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
93138	168.2 to 221.7 feet	Key Note Segment		5 ft	268			
93110	200.5 to 201.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
93122	223.1 to 226.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
93123	226.3 to 228.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
93124	230.0 to 232.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	14	SF	$120	**$1,680**
93125	232.8 to 236.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
93126	237.3 to 241.4 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	21	SF	$120	**$2,460**
93111	240.1 to 241.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		
93127	242.4 to 243.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
93128	244.3 to 248.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	20	SF	$120	**$2,340**
93129	251.4 to 255.3 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	20	SF	$120	**$2,340**
93130	255.3 to 259.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	22	SF	$120	**$2,640**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2201111601	WILLOW CT	VALLEY WAY	VALLEY WAY	57

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
93131	260.9 to 266.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
93132	267.1 to 274.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	36	SF	$120	**$4,320**
93133	274.3 to 276.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	9	SF	$120	**$1,080**
93134	277.8 to 282.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,060**
93135	282.9 to 289.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	32	SF	$120	**$3,840**

TOTAL COST FOR: S/E/N *side of* **WILLOW CT** *Starting at:* **VALLEY WAY** **$93,960.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031029	WILSON AVE	117 WILSON AVE	DAVIS ST	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119494	0.1 to 2.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
119495	3.1 to 10.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
119490	8.5 to 9.5 feet	**Vertical Change**	-.28"	5 ft	5	REF		
119496	10.6 to 15.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,700**
119491	16.2 to 17.2 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**
119508	21.3 to 22.3 feet	**Protruding Object**	60"	5 ft	5	JOB	$99	**$99**
119497	23.1 to 24.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	9	SF	$120	**$1,020**
119498	24.8 to 39.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$9,000**
119499	39.8 to 60.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	105	SF	$120	**$12,600**
119500	61.4 to 68.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,500**
119492	63.8 to 64.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
119501	71.4 to 73.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
119502	73.0 to 78.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
119503	82.3 to 90.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
119504	100.8 to 118.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	90	SF	$120	**$10,740**
119493	133.7 to 134.7 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
119505	137.4 to 140.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
119506	143.2 to 148.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,420**
119507	151.8 to 159.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,620**

TOTAL COST FOR: N *side of* **WILSON AVE** *Starting at:* **117 WILSON AVE** **$65,829.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031023	WILSON AVE	200 WILSON AVE	DAVIS ST	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119476	2.3 to 27.8 feet	Key Note Segment		5 ft	128			
119474	15.6 to 16.6 feet	**Vertical Change**	.32"	5 ft	5	REF		
119475	27.8 to 35.9 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	41	SF	$40	**$1,620**

TOTAL COST FOR: S *side of* **WILSON AVE** *Starting at:* **200 WILSON AVE** **$1,620.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031001	WILSON AVE	309 WILSON AVE	309 WILSON AVE	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119384	0.7 to 1.7 feet	Vertical Change	-.42"	5 ft	5	REF		
119385	1.5 to 2.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
119386	2.9 to 4.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
119387	4.2 to 16.5 feet	Key Note Segment		5 ft	62			

TOTAL COST FOR: N *side of* **WILSON AVE** *Starting at:* **309 WILSON AVE** **$1,500.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031009	WILSON AVE	316 WILSON AVE	312 WILSON AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119411	0.9 to 12.7 feet	Key Note Segment		5 ft	59			
119407	22.2 to 26.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,760**
119408	30.8 to 34.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
119404	39.5 to 40.5 feet	**Vertical Change**	.39"	5 ft	5	LF	$75	**$375**
119409	48.0 to 67.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	99	SF	$120	**$11,880**
119405	51.4 to 52.4 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119412	67.8 to 76.7 feet	Key Note Segment		5 ft	45			
119406	77.3 to 78.3 feet	**Vertical Change**	.36"	5 ft	5	REF		
119410	77.3 to 80.5 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	16	SF	$40	**$640**

TOTAL COST FOR: S *side of* **WILSON AVE** *Starting at:* **316 WILSON AVE** **$17,575.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031003	WILSON AVE	317 WILSON AVE	317 WILSON AVE	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119389	0.0 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
119390	9.7 to 15.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	30	SF	$40	**$1,180**
119388	12.6 to 13.6 feet	**Vertical Change**	3.26"	5 ft	5	REF		
119391	19.1 to 23.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
119392	24.0 to 36.2 feet	Key Note Segment		5 ft	61			

TOTAL COST FOR: N *side of* **WILSON AVE** *Starting at:* **317 WILSON AVE** **$6,880.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031038	WILSON AVE	DAVIS ST	OWENS ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119574	0.0 to 7.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,500**
119560	3.2 to 4.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
119575	7.5 to 10.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
119561	20.5 to 21.5 feet	**Vertical Change**	-.86"	5 ft	5	SF	$75	**$375**
119576	23.8 to 26.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,620**
119577	38.8 to 40.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$780**
119578	41.2 to 44.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
119579	47.9 to 54.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
119580	58.1 to 66.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
119562	65.8 to 66.8 feet	**Vertical Change**	-.45"	5 ft	5	REF		
119581	71.9 to 73.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
119582	108.3 to 111.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
119583	111.9 to 118.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,080**
119563	114.1 to 115.1 feet	**Vertical Change**	.33"	5 ft	5	REF		
119584	121.1 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
119564	121.7 to 122.7 feet	**Vertical Change**	.43"	5 ft	5	REF		
119585	127.5 to 146.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	97	SF	$120	**$11,580**
119586	149.0 to 152.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,220**
119587	153.3 to 155.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,440**
119588	157.8 to 163.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,540**
119589	172.1 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
119590	178.7 to 181.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
119591	198.4 to 201.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
119592	204.3 to 225.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	107	SF	$120	**$12,780**
119565	223.2 to 224.2 feet	**Vertical Change**	.26"	5 ft	5	REF		
119593	235.3 to 243.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
119566	240.5 to 241.5 feet	**Vertical Change**	-.29"	5 ft	5	REF		
119594	243.3 to 259.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,780**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202031038	WILSON AVE	DAVIS ST	OWENS ST	81

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119595	259.6 to 269.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	48	SF	$120	**$5,820**
119596	272.0 to 276.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
119597	276.0 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,680**
119598	287.7 to 320.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	165	SF	$120	**$19,800**
119567	290.1 to 291.1 feet	**Vertical Change**	.32"	5 ft	5	REF		
119568	300.9 to 301.9 feet	**Vertical Change**	-.42"	5 ft	5	REF		
119569	311.8 to 312.8 feet	**Vertical Change**	.26"	5 ft	5	REF		
119603	321.7 to 322.7 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119570	322.0 to 323.0 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
119599	326.2 to 344.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	94	SF	$120	**$11,220**
119605	330.1 to 333.6 feet		5.0-6.0%	5 ft	18			
119606	330.1 to 333.6 feet	Running Slope	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
119600	345.5 to 347.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
119601	352.6 to 369.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
119571	362.6 to 363.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
119604	364.3 to 365.3 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119602	372.2 to 378.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,780**
119572	373.1 to 374.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
119573	378.5 to 379.5 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: N *side of* **WILSON AVE** *Starting at:* **DAVIS ST** **$142,968.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202031007	WILSON AVE	SHARON BVD	322 WILSON AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
119396	2.6 to 9.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,020**
119397	13.3 to 16.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,100**
119393	14.2 to 15.2 feet	**Vertical Change**	.53"	5 ft	5	REF		
119398	24.6 to 28.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$820**
119399	35.0 to 63.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	142	SF	$40	**$5,660**
119400	66.3 to 128.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	311	SF	$120	**$37,260**
119403	103.5 to 104.5 feet	**Protruding Object**	72"	5 ft	5	JOB	$99	**$99**
119401	130.9 to 136.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
119394	134.7 to 135.7 feet	**Vertical Change**	-.26"	5 ft	5	REF		
119402	138.4 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	77	SF	$120	**$9,240**
119395	153.9 to 154.9 feet	**Vertical Change**	1.48"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: S *side of* **WILSON AVE** *Starting at:* **SHARON BVD** **$62,634.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109161015	WINDSOX CT	PAINTBRUSH DR	PAINTBRUSH DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
69991	0.0 to 10.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	54	SF	$120	**$6,480**
69992	11.3 to 13.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
69993	25.3 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,820**
69994	35.2 to 41.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,900**
69995	46.3 to 52.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
70015	53.1 to 76.3 feet	Key Note Segment		5 ft	116			
69981	67.1 to 68.1 feet	**Vertical Change**	.35"	5 ft	5	REF		
69996	77.2 to 79.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
69997	80.5 to 105.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	125	SF	$120	**$14,940**
69982	84.1 to 85.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
69998	108.0 to 109.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
69999	111.9 to 114.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
69983	119.0 to 120.0 feet	**Vertical Change**	.35"	5 ft	5	LF	$75	**$375**
70000	121.4 to 137.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,900**
69984	128.8 to 129.8 feet	**Vertical Change**	-.31"	5 ft	5	REF		
70001	150.5 to 153.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$1,980**
70016	155.5 to 189.0 feet	Key Note Segment		5 ft	168			
69985	178.5 to 179.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
70002	200.2 to 206.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
70017	206.6 to 226.7 feet	Key Note Segment		5 ft	101			
69986	217.7 to 218.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
70003	228.3 to 230.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,260**
69987	231.9 to 232.9 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
70018	237.1 to 252.8 feet	Key Note Segment		5 ft	79			
70004	252.8 to 257.0 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	21	SF	$40	**$840**
70005	259.9 to 261.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
70019	262.3 to 279.6 feet	Key Note Segment		5 ft	87			
69988	271.0 to 272.0 feet	**Vertical Change**	.34"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N / S	2109161015	WINDSOX CT	PAINTBRUSH DR	PAINTBRUSH DR	37

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
70006	289.8 to 295.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
70007	298.3 to 299.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
70008	302.6 to 303.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	5	SF	$120	**$660**
69989	305.6 to 306.6 feet	**Vertical Change**	-.28"	5 ft	5	REF		
70009	306.3 to 307.8 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	8	SF	$120	**$900**
70010	312.3 to 315.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
70020	316.0 to 341.2 feet	Key Note Segment		5 ft	126			
69990	330.5 to 331.5 feet	**Vertical Change**	.27"	5 ft	5	REF		
70011	342.3 to 348.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
70012	363.3 to 369.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
70021	369.5 to 409.3 feet	Key Note Segment		5 ft	199			
70013	409.3 to 414.6 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	27	SF	$40	**$1,060**
70014	416.0 to 436.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	103	SF	$120	**$12,300**
70022	433.8 to 435.0 feet		5.0-6.0%	5 ft	6			
70023	435.0 to 436.1 feet		6.0-7.0%	5 ft	6			

TOTAL COST FOR: N / S *side of* **WINDSOX CT** *Starting at:* **PAINTBRUSH DR** **$83,950.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151406	WINTER WAY	CREEK DR	TIMBERLINE DR	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82953	0.0 to 1.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,140**
82954	3.5 to 4.6 feet	Cross Slope (PAR)	8.0-9.0%	5 ft	5	SF	$120	**$660**
82955	5.4 to 15.5 feet	Cross Slope (PAR)	10.0-11.0%	5 ft	51	SF	$120	**$6,060**
82956	21.8 to 24.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
82957	26.9 to 33.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
82958	34.8 to 35.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82959	40.2 to 41.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$660**
82960	43.7 to 47.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
82946	45.9 to 46.9 feet	**Vertical Change**	.37"	5 ft	5	REF		
82961	49.5 to 51.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
82962	52.5 to 54.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	9	SF	$120	**$1,080**
82963	54.7 to 63.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	43	SF	$120	**$5,100**
82984	63.8 to 82.8 feet	Key Note Segment		5 ft	95			
82964	83.3 to 87.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	21	SF	$40	**$820**
82965	90.3 to 98.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	41	SF	$120	**$4,860**
82966	102.3 to 105.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
82967	109.2 to 112.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,220**
82985	113.7 to 133.0 feet	Key Note Segment		5 ft	97			
82968	133.3 to 136.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	17	SF	$40	**$680**
82986	139.8 to 158.6 feet	Key Note Segment		5 ft	94			
82947	140.5 to 141.5 feet	**Vertical Change**	2.64"	5 ft	5	REF		
82969	159.7 to 161.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
82970	164.1 to 166.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
82971	166.0 to 173.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
82972	173.3 to 174.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
82973	178.3 to 182.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
82974	183.7 to 191.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
82975	191.3 to 201.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,120**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151406	WINTER WAY	CREEK DR	TIMBERLINE DR	74

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82976	202.9 to 209.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
82977	210.2 to 216.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
82987	216.6 to 236.8 feet	Key Note Segment		5 ft	101			
82978	237.6 to 243.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,360**
82988	243.7 to 262.7 feet	Key Note Segment		5 ft	95			
82979	263.8 to 265.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,200**
82948	264.6 to 265.6 feet	**Vertical Change**	.48"	5 ft	5	REF		
82980	265.8 to 266.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
82981	266.8 to 269.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,800**
82949	267.4 to 268.4 feet	**Vertical Change**	-.38"	5 ft	5	REF		
82982	269.8 to 281.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	58	SF	$120	**$6,900**
82950	272.2 to 273.2 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
82951	277.4 to 280.1 feet	**Vertical Change**	-.53"	5 ft	14	REF		
82952	280.8 to 284.8 feet	**Vertical Change**	.37"	5 ft	20	REF		
82983	281.3 to 283.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
82989	281.6 to 283.0 feet		5.0-6.0%	5 ft	7			

TOTAL COST FOR: N *side of* **WINTER WAY** *Starting at:* **CREEK DR** **$78,135.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151354	WINTER WAY	DOUBLE TREE WAY	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82818	0.0 to 3.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
82819	7.2 to 12.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
82820	16.3 to 19.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	18	SF	$120	**$2,100**
82821	20.8 to 25.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$3,000**
82841	25.8 to 46.3 feet	Key Note Segment		5 ft	103			
82822	48.3 to 50.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
82842	52.2 to 72.0 feet	Key Note Segment		5 ft	99			
82811	53.1 to 54.1 feet	**Vertical Change**	-.35"	5 ft	5	REF		
82812	71.7 to 72.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
82823	72.8 to 73.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
82824	74.9 to 89.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,640**
82825	89.8 to 95.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
82826	98.8 to 112.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
82827	114.6 to 139.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	124	SF	$120	**$14,880**
82813	128.2 to 129.2 feet	**Vertical Change**	.54"	5 ft	5	REF		
82843	139.8 to 159.3 feet	Key Note Segment		5 ft	98			
82814	141.6 to 142.6 feet	**Vertical Change**	2.34"	5 ft	5	REF		
82828	162.1 to 164.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	14	SF	$120	**$1,620**
82844	165.4 to 185.7 feet	Key Note Segment		5 ft	102			
82829	186.9 to 189.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
82830	189.8 to 193.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	17	SF	$120	**$2,040**
82831	195.3 to 197.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**
82832	199.2 to 204.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,060**
82833	204.8 to 206.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
82834	208.4 to 209.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82835	211.5 to 217.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
82836	219.8 to 223.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$1,980**
82845	223.7 to 244.1 feet	Key Note Segment		5 ft	102			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151354	WINTER WAY	DOUBLE TREE WAY	WOLFTRAP ST	53

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82815	224.6 to 225.6 feet	Vertical Change	-.38"	5 ft	5	REF		
82837	246.8 to 248.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
82838	251.2 to 252.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
82839	252.5 to 259.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,380**
82816	252.8 to 253.8 feet	Vertical Change	.28"	5 ft	5	REF		
82817	261.9 to 262.9 feet	Vertical Change	.3"	5 ft	5	LF	$75	**$375**
82840	265.5 to 271.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**

TOTAL COST FOR: S *side of* **WINTER WAY** *Starting at:* **DOUBLE TREE WAY** **$73,635.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151621	WINTER WAY	KENT DR	KENT WAY	42

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84678	0.0 to 4.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
84679	6.3 to 21.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	78	SF	$120	**$9,300**
84684	24.4 to 43.3 feet	Key Note Segment		5 ft	95			
84673	34.0 to 35.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
84680	44.2 to 49.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,420**
84685	50.3 to 69.3 feet	Key Note Segment		5 ft	95			
84681	75.2 to 81.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	32	SF	$120	**$3,840**
84674	82.3 to 83.3 feet	**Vertical Change**	.81"	5 ft	5	SF	$75	**$375**
84682	83.7 to 86.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,440**
84683	91.7 to 102.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	56	SF	$120	**$6,720**
84686	102.9 to 123.3 feet	Key Note Segment		5 ft	102			
84675	113.6 to 114.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
84676	123.0 to 124.0 feet	**Vertical Change**	-1.16"	5 ft	5	REF		
84677	141.1 to 142.1 feet	**Vertical Change**	.42"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: N *side of* **WINTER WAY** *Starting at:* **KENT DR** **$27,990.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151625	WINTER WAY	KENT WAY	ZAK WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84705	0.0 to 2.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	13	SF	$120	**$1,500**
84706	2.5 to 5.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84707	8.8 to 15.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	34	SF	$120	**$4,080**
84708	18.2 to 23.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
84744	24.0 to 43.5 feet	Key Note Segment		5 ft	98			
84745	49.7 to 69.9 feet	Key Note Segment		5 ft	101			
84687	50.4 to 51.4 feet	**Vertical Change**	-.32"	5 ft	5	REF		
84688	69.8 to 70.8 feet	**Vertical Change**	-.44"	5 ft	5	REF		
84709	71.3 to 72.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
84710	75.0 to 77.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,320**
84711	80.5 to 81.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
84712	84.0 to 92.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	41	SF	$120	**$4,920**
84713	96.2 to 100.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	22	SF	$120	**$2,580**
84689	101.3 to 102.3 feet	**Vertical Change**	-.31"	5 ft	5	LF	$75	**$375**
84714	102.8 to 107.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	23	SF	$120	**$2,700**
84690	105.7 to 106.7 feet	**Vertical Change**	.31"	5 ft	5	REF		
84715	107.7 to 118.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	52	SF	$120	**$6,180**
84716	121.3 to 122.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84717	123.5 to 128.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
84746	128.9 to 149.7 feet	Key Note Segment		5 ft	104			
84691	130.0 to 131.0 feet	**Vertical Change**	.61"	5 ft	5	REF		
84718	152.6 to 153.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
84719	153.8 to 156.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,500**
84747	156.3 to 175.2 feet	Key Note Segment		5 ft	94			
84720	176.0 to 179.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,280**
84721	182.9 to 185.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
84722	186.0 to 189.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,920**
84723	191.0 to 195.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,760**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151625	WINTER WAY	KENT WAY	ZAK WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84724	204.5 to 206.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
84725	209.8 to 216.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
84726	218.8 to 237.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	95	SF	$120	**$11,400**
84748	238.0 to 257.7 feet	Key Note Segment		5 ft	99			
84727	259.0 to 262.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
84749	264.3 to 283.5 feet	Key Note Segment		5 ft	96			
84728	283.5 to 284.7 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	6	SF	$40	**$240**
84729	286.8 to 303.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	82	SF	$120	**$9,840**
84730	306.3 to 325.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	95	SF	$120	**$11,400**
84693	310.2 to 311.2 feet	**Vertical Change**	.59"	5 ft	5	REF		
84694	317.8 to 318.8 feet	**Vertical Change**	.32"	5 ft	5	REF		
84731	332.5 to 340.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	39	SF	$120	**$4,680**
84695	335.1 to 336.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
84732	340.5 to 342.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
84750	342.1 to 361.9 feet	Key Note Segment		5 ft	99			
84696	343.2 to 344.2 feet	**Vertical Change**	-.28"	5 ft	5	REF		
84698	349.5 to 350.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
84733	362.9 to 364.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
84751	368.3 to 386.3 feet	Key Note Segment		5 ft	90			
84699	378.1 to 379.1 feet	**Vertical Change**	.37"	5 ft	5	REF		
84700	387.8 to 388.8 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
84734	390.1 to 396.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	32	SF	$120	**$3,840**
84701	393.5 to 394.5 feet	**Vertical Change**	-.4"	5 ft	5	REF		
84735	396.5 to 406.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
84702	398.9 to 399.9 feet	**Vertical Change**	.49"	5 ft	5	REF		
84736	409.1 to 413.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
84737	414.4 to 429.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	76	SF	$120	**$9,060**
84738	429.5 to 432.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151625	WINTER WAY	KENT WAY	ZAK WAY	47

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84739	434.8 to 436.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,080**
84740	438.7 to 446.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	39	SF	$120	**$4,620**
84752	446.9 to 466.8 feet	Key Note Segment		5 ft	100			
84741	467.4 to 474.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	34	SF	$40	**$1,360**
84753	474.2 to 493.0 feet	Key Note Segment		5 ft	94			
84703	474.9 to 475.9 feet	**Vertical Change**	-.38"	5 ft	5	REF		
84704	483.1 to 484.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
84742	494.0 to 497.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,220**
84743	499.9 to 516.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	83	SF	$120	**$9,900**

TOTAL COST FOR: S *side of* **WINTER WAY** *Starting at:* **KENT WAY** **$133,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2112151408	WINTER WAY	TIMBERLINE DR	CREEK DR	32

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82996	1.2 to 24.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	116	SF	$120	**$13,860**
83010	26.0 to 45.9 feet	Key Note Segment		5 ft	100			
82990	45.3 to 46.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
82997	47.9 to 51.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
83011	51.6 to 72.1 feet	Key Note Segment		5 ft	102			
82991	52.6 to 53.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
82998	72.1 to 81.5 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	47	SF	$40	**$1,880**
82999	85.5 to 95.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	48	SF	$120	**$5,760**
83000	96.6 to 101.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
82992	97.2 to 98.2 feet	**Vertical Change**	.32"	5 ft	5	REF		
83001	104.0 to 105.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82993	107.4 to 108.4 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
83002	108.6 to 115.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
83003	119.8 to 123.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	21	SF	$120	**$2,460**
83004	127.7 to 135.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,920**
83012	141.0 to 160.3 feet	Key Note Segment		5 ft	97			
82994	151.5 to 152.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
83005	162.2 to 166.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
83013	167.8 to 187.4 feet	Key Note Segment		5 ft	98			
83006	190.8 to 191.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
83007	194.8 to 202.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	37	SF	$120	**$4,380**
83008	206.7 to 212.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,180**
83009	212.0 to 213.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
82995	214.0 to 215.0 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: S *side of* **WINTER WAY** *Starting at:* **TIMBERLINE DR** **$51,410.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151327	WINTER WAY	WOLFTRAP ST	DOUBLE TREE WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82540	0.8 to 2.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$960**
82564	2.4 to 23.6 feet	Key Note Segment		5 ft	106			
82541	30.1 to 37.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	**$4,560**
82542	41.8 to 44.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
82565	46.2 to 66.8 feet	Key Note Segment		5 ft	103			
82536	56.3 to 57.3 feet	**Vertical Change**	.33"	5 ft	5	REF		
82543	69.4 to 72.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	16	SF	$120	**$1,980**
82566	72.7 to 92.1 feet	Key Note Segment		5 ft	97			
82544	93.8 to 100.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	35	SF	$120	**$4,200**
82545	101.3 to 105.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
82546	105.8 to 110.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
82547	110.0 to 114.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,460**
82548	118.3 to 121.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	14	SF	$120	**$1,620**
82549	129.4 to 141.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,140**
82550	142.3 to 150.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	42	SF	$120	**$5,040**
82567	154.3 to 174.6 feet	Key Note Segment		5 ft	101			
82537	164.6 to 165.6 feet	**Vertical Change**	-.32"	5 ft	5	REF		
82551	175.7 to 180.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	26	SF	$120	**$3,060**
82568	180.8 to 200.8 feet	Key Note Segment		5 ft	100			
82552	201.4 to 204.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	14	SF	$40	**$560**
82538	201.6 to 202.6 feet	**Vertical Change**	.37"	5 ft	5	REF		
82553	204.2 to 206.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,140**
82554	208.2 to 217.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,640**
82555	217.8 to 221.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	17	SF	$120	**$2,040**
82556	221.2 to 222.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**
82557	224.9 to 231.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,720**
82558	231.1 to 237.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,720**
82559	237.3 to 246.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,340**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151327	WINTER WAY	WOLFTRAP ST	DOUBLE TREE WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82560	248.3 to 256.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,860**
82569	257.3 to 278.2 feet	Key Note Segment		5 ft	105			
82561	281.8 to 282.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
82570	284.1 to 304.3 feet	Key Note Segment		5 ft	101			
82539	306.4 to 307.4 feet	**Vertical Change**	.27"	5 ft	5	REF		
82562	306.6 to 320.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
82563	321.9 to 325.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**

TOTAL COST FOR: N *side of* **WINTER WAY** *Starting at:* **WOLFTRAP ST** **$76,520.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151619	WINTER WAY	ZAK WAY	KENT DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84635	0.6 to 14.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	69	SF	$120	**$8,220**
84636	18.0 to 24.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
84637	26.8 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,960**
84638	48.9 to 58.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,820**
84639	60.2 to 62.2 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	10	SF	$120	**$1,200**
84640	63.0 to 68.7 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	29	SF	$120	**$3,420**
84641	68.8 to 72.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
84642	74.8 to 78.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
84665	79.8 to 100.3 feet	Key Note Segment		5 ft	103			
84627	81.0 to 82.0 feet	**Vertical Change**	.28"	5 ft	5	REF		
84628	90.3 to 91.3 feet	**Vertical Change**	.26"	5 ft	5	REF		
84643	104.3 to 109.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
84644	109.7 to 117.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	40	SF	$120	**$4,800**
84629	120.2 to 121.2 feet	**Vertical Change**	.34"	5 ft	5	REF		
84645	120.4 to 122.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	8	SF	$120	**$960**
84646	123.9 to 127.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
84647	127.8 to 131.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,920**
84666	131.7 to 151.3 feet	Key Note Segment		5 ft	98			
84630	132.8 to 133.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
84648	153.1 to 158.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	28	SF	$120	**$3,300**
84667	158.8 to 178.5 feet	Key Note Segment		5 ft	98			
84649	181.4 to 191.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	48	SF	$120	**$5,760**
84650	192.8 to 198.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	30	SF	$120	**$3,600**
84651	200.8 to 216.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,480**
84652	222.8 to 230.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,800**
84653	230.8 to 234.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,160**
84668	234.8 to 255.3 feet	Key Note Segment		5 ft	103			
84654	255.7 to 261.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	28	SF	$120	**$3,420**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2112151619	WINTER WAY	ZAK WAY	KENT DR	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84669	261.8 to 282.3 feet	Key Note Segment		5 ft	103			
84655	282.7 to 287.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
84656	289.5 to 295.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
84657	297.7 to 300.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
84658	302.4 to 336.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	172	SF	$120	**$20,640**
84672	302.9 to 303.9 feet		6.0-7.0%	5 ft	5			
84631	313.7 to 314.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
84632	324.7 to 325.7 feet	**Vertical Change**	3.42"	5 ft	5	REF		
84670	338.1 to 358.5 feet	Key Note Segment		5 ft	102			
84633	339.2 to 340.2 feet	**Vertical Change**	.77"	5 ft	5	REF		
84659	359.8 to 364.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
84671	364.5 to 385.3 feet	Key Note Segment		5 ft	104			
84660	387.3 to 391.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	23	SF	$120	**$2,700**
84661	394.6 to 395.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
84662	400.0 to 404.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
84663	404.3 to 406.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	12	SF	$120	**$1,380**
84664	406.6 to 407.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	6	SF	$120	**$720**

TOTAL COST FOR: N *side of* **WINTER WAY** *Starting at:* **ZAK WAY** **$115,320.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109160743	WOLFTRAP CT	RIVERVIEW DR	RIVERVIEW DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68249	0.0 to 8.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	44	SF	$120	**$5,280**
68250	10.3 to 11.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
68251	17.4 to 19.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
68252	26.5 to 29.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	16	SF	$120	**$1,860**
68253	32.5 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
68280	38.3 to 61.3 feet	Key Note Segment		5 ft	115			
68254	64.4 to 65.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
68255	65.9 to 67.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$1,020**
68239	72.5 to 73.5 feet	**Vertical Change**	-.26"	5 ft	5	LF	$75	**$375**
68256	84.8 to 97.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
68257	103.9 to 113.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
68281	113.8 to 136.0 feet	Key Note Segment		5 ft	111			
68258	136.7 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	100	SF	$120	**$11,940**
68282	156.9 to 178.5 feet	Key Note Segment		5 ft	108			
68259	178.5 to 196.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	92	SF	$40	**$3,660**
68260	197.0 to 207.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,180**
68261	207.3 to 227.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	102	SF	$120	**$12,240**
68262	227.8 to 234.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
68283	234.5 to 259.7 feet	Key Note Segment		5 ft	126			
68263	282.3 to 283.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
68284	286.3 to 303.3 feet	Key Note Segment		5 ft	85			
68240	295.2 to 296.2 feet	**Vertical Change**	-.34"	5 ft	5	REF		
68264	303.7 to 315.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	61	SF	$120	**$7,260**
68265	319.8 to 325.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
68241	326.7 to 327.7 feet	**Vertical Change**	-.58"	5 ft	5	SF	$75	**$375**
68285	328.4 to 352.5 feet	Key Note Segment		5 ft	121			
68286	367.0 to 386.8 feet	Key Note Segment		5 ft	99			
68242	378.5 to 379.5 feet	**Vertical Change**	.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W / E	2109160743	WOLFTRAP CT	RIVERVIEW DR	RIVERVIEW DR	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
68243	383.9 to 384.9 feet	Vertical Change	.35"	5 ft	5	REF		
68266	387.9 to 394.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	$4,140
68244	395.6 to 396.6 feet	Vertical Change	.31"	5 ft	5	LF	$75	$375
68267	401.3 to 405.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	$2,760
68268	412.4 to 413.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	$900
68269	414.5 to 417.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	$1,620
68270	422.8 to 424.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	$900
68287	424.3 to 445.4 feet	Key Note Segment		5 ft	106			
68245	424.8 to 425.8 feet	Vertical Change	.38"	5 ft	5	REF		
68246	431.4 to 432.4 feet	Vertical Change	.35"	5 ft	5	REF		
68271	446.8 to 457.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	$6,120
68272	458.3 to 461.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	$1,800
68247	462.7 to 463.7 feet	Vertical Change	.36"	5 ft	5	LF	$75	$375
68273	502.9 to 510.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	38	SF	$120	$4,500
68288	511.4 to 533.9 feet	Key Note Segment		5 ft	113			
68274	535.5 to 551.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	78	SF	$120	$9,300
68289	551.0 to 571.7 feet	Key Note Segment		5 ft	104			
68275	573.7 to 591.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	$10,740
68276	591.6 to 603.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	58	SF	$120	$6,900
68248	600.9 to 601.9 feet	Vertical Change	-.37"	5 ft	5	REF		
68277	604.4 to 609.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	$2,940
68290	609.3 to 631.9 feet	Key Note Segment		5 ft	113			
68278	636.4 to 638.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	$1,380
68279	642.4 to 654.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	$7,200

TOTAL COST FOR: W / E *side of* **WOLFTRAP CT** *Starting at:* **RIVERVIEW DR** **$139,980.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151324	WOLFTRAP ST	REN WAY	WINTER WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82509	0.6 to 5.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	25	SF	$120	**$2,940**
82510	16.2 to 20.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	23	SF	$120	**$2,700**
82511	24.5 to 28.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
82512	28.2 to 32.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
82513	33.2 to 36.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,740**
82493	34.6 to 35.6 feet	**Vertical Change**	.27"	5 ft	5	REF		
82530	36.1 to 56.8 feet	Key Note Segment		5 ft	104			
82494	60.2 to 61.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**
82531	62.1 to 80.8 feet	Key Note Segment		5 ft	94			
82495	72.0 to 73.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
82514	81.4 to 95.2 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	69	SF	$40	**$2,760**
82496	81.5 to 82.5 feet	**Vertical Change**	.58"	5 ft	5	REF		
82497	90.0 to 91.0 feet	**Vertical Change**	.29"	5 ft	5	REF		
82515	99.0 to 102.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	16	SF	$120	**$1,920**
82516	103.2 to 115.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,200**
82535	111.7 to 112.7 feet		6.0-7.0%	5 ft	5			
82498	112.7 to 113.7 feet	**Vertical Change**	-.41"	5 ft	5	REF		
82499	124.5 to 125.5 feet	**Vertical Change**	.34"	5 ft	5	REF		
82517	125.3 to 142.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	85	SF	$120	**$10,200**
82500	136.7 to 137.7 feet	**Vertical Change**	.44"	5 ft	5	REF		
82518	145.2 to 148.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
82501	147.6 to 148.6 feet	**Vertical Change**	-.3"	5 ft	5	REF		
82532	148.8 to 167.7 feet	Key Note Segment		5 ft	94			
82502	158.0 to 159.0 feet	**Vertical Change**	.33"	5 ft	5	REF		
82503	167.4 to 168.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
82519	169.3 to 172.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
82533	173.3 to 193.9 feet	Key Note Segment		5 ft	103			
82520	196.8 to 202.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151324	WOLFTRAP ST	REN WAY	WINTER WAY	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82521	204.1 to 209.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	26	SF	$120	**$3,120**
82504	207.3 to 208.3 feet	**Vertical Change**	.37"	5 ft	5	REF		
82522	209.3 to 212.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
82523	212.8 to 216.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
82524	218.6 to 220.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	7	SF	$120	**$840**
82525	220.8 to 221.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82534	225.6 to 245.8 feet	Key Note Segment		5 ft	101			
82505	226.0 to 227.0 feet	**Vertical Change**	.38"	5 ft	5	REF		
82526	246.7 to 259.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
82527	260.0 to 261.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82506	263.6 to 264.6 feet	**Vertical Change**	1.53"	5 ft	5	REF		
82528	263.9 to 267.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,100**
82529	267.4 to 278.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	55	SF	$120	**$6,540**
82507	267.9 to 268.9 feet	**Vertical Change**	2.91"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WOLFTRAP ST** *Starting at:* **REN WAY** **$67,695.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151336	WOLFTRAP ST	SUMMER LN	321 SUMMER LN	36

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82648	1.4 to 6.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
82645	8.0 to 9.0 feet	**Vertical Change**	.37"	5 ft	5	LF	$75	**$375**
82649	9.8 to 20.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,120**
82650	20.0 to 21.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
82657	21.4 to 42.1 feet	Key Note Segment		5 ft	104			
82646	41.7 to 42.7 feet	**Vertical Change**	-.45"	5 ft	5	REF		
82651	45.1 to 46.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82658	47.3 to 67.7 feet	Key Note Segment		5 ft	102			
82652	69.4 to 73.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**
82653	75.9 to 81.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,540**
82647	79.6 to 80.6 feet	**Vertical Change**	.56"	5 ft	5	REF		
82654	82.8 to 94.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	59	SF	$120	**$7,080**
82655	96.3 to 98.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
82656	98.6 to 100.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,020**

TOTAL COST FOR: E *side of* **WOLFTRAP ST** *Starting at:* **SUMMER LN** **$26,655.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151356	WOLFTRAP ST	WINTER WAY	REN WAY	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
82850	0.0 to 20.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	102	SF	$120	**$12,180**
82851	20.8 to 23.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
82852	27.9 to 32.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,940**
82853	33.6 to 34.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
82854	38.8 to 39.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
82871	39.3 to 40.4 feet		5.0-6.0%	5 ft	6			
82855	42.2 to 55.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**
82856	57.6 to 60.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,860**
82857	60.7 to 64.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	19	SF	$120	**$2,280**
82858	68.3 to 72.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
82859	76.2 to 81.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	24	SF	$120	**$2,940**
82860	81.5 to 84.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	17	SF	$120	**$1,980**
82861	87.1 to 88.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	9	SF	$120	**$1,020**
82846	87.4 to 88.4 feet	**Vertical Change**	.39"	5 ft	5	REF		
82862	89.6 to 90.6 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
82863	93.2 to 102.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	46	SF	$120	**$5,520**
82864	104.7 to 107.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,560**
82865	110.0 to 123.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	65	SF	$120	**$7,800**
82847	110.2 to 111.2 feet	**Vertical Change**	-1.58"	5 ft	5	REF		
82848	112.4 to 115.1 feet	**Vertical Change**	.35"	5 ft	14	REF		
82866	128.4 to 131.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
82867	132.2 to 133.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82868	136.3 to 141.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
82869	141.3 to 142.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
82870	143.9 to 146.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	13	SF	$120	**$1,560**
82849	144.8 to 145.8 feet	**Vertical Change**	.31"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **WOLFTRAP ST** *Starting at:* **WINTER WAY** **$62,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112161428	WOODLANDS CT	WOODLANDS DR	WOODLANDS DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87130	5.9 to 14.3 feet	Cross Slope (PAR)	13.0-14.0%	5 ft	42	SF	$120	**$5,040**
87131	14.8 to 16.2 feet	Cross Slope (PAR)	11.0-12.0%	5 ft	7	SF	$120	**$840**
87132	20.0 to 21.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87161	25.1 to 53.7 feet	Key Note Segment		5 ft	143			
87099	43.8 to 44.8 feet	**Vertical Change**	.7"	5 ft	5	REF		
87133	55.7 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	83	SF	$120	**$9,960**
87134	73.3 to 89.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	80	SF	$120	**$9,540**
87100	86.1 to 87.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
87135	90.1 to 91.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87136	94.0 to 96.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
87162	98.3 to 129.8 feet	Key Note Segment		5 ft	158			
87101	101.4 to 102.4 feet	**Vertical Change**	.46"	5 ft	5	REF		
87102	115.3 to 116.3 feet	**Vertical Change**	.44"	5 ft	5	REF		
87103	127.4 to 128.4 feet	**Vertical Change**	.41"	5 ft	5	REF		
87104	130.5 to 131.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
87137	131.9 to 144.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	63	SF	$120	**$7,560**
87105	142.7 to 143.7 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87138	147.5 to 148.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87106	151.3 to 152.3 feet	**Vertical Change**	.45"	5 ft	5	REF		
87139	151.3 to 156.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,180**
87140	159.2 to 162.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
87107	159.5 to 160.5 feet	**Vertical Change**	.32"	5 ft	5	REF		
87108	172.9 to 173.9 feet	**Vertical Change**	.97"	5 ft	5	SF	$75	**$375**
87163	173.4 to 203.8 feet	Key Note Segment		5 ft	152			
87109	192.0 to 193.0 feet	**Vertical Change**	.26"	5 ft	5	REF		
87141	205.3 to 215.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,300**
87142	219.1 to 245.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	131	SF	$120	**$15,720**
87164	246.6 to 275.0 feet	Key Note Segment		5 ft	142			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112161428	WOODLANDS CT	WOODLANDS DR	WOODLANDS DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87110	258.8 to 262.8 feet	Vertical Change	.48"	5 ft	20	REF		
87111	274.3 to 275.3 feet	Vertical Change	-.27"	5 ft	5	REF		
87143	275.8 to 294.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	92	SF	$120	**$11,040**
87112	287.2 to 288.2 feet	Vertical Change	.32"	5 ft	5	REF		
87144	295.1 to 307.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,260**
87113	295.7 to 296.7 feet	Vertical Change	-.28"	5 ft	5	REF		
87114	315.4 to 316.4 feet	Vertical Change	-.35"	5 ft	5	LF	$75	**$375**
87145	316.6 to 322.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,360**
87146	324.1 to 328.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	23	SF	$120	**$2,820**
87165	328.8 to 356.7 feet	Key Note Segment		5 ft	140			
87115	337.1 to 338.1 feet	Vertical Change	.27"	5 ft	5	REF		
87166	360.4 to 391.8 feet	Key Note Segment		5 ft	157			
87147	392.5 to 397.3 feet	Cross Slope (Driveway)	4.0-5.0%	5 ft	24	SF	$40	**$960**
87117	400.3 to 401.3 feet	Vertical Change	-.26"	5 ft	5	REF		
87148	400.3 to 416.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,420**
87167	416.5 to 438.5 feet	Key Note Segment		5 ft	110			
87119	432.4 to 433.4 feet	Vertical Change	-.29"	5 ft	5	REF		
87149	440.4 to 442.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$960**
87168	442.0 to 463.1 feet	Key Note Segment		5 ft	106			
87150	471.9 to 500.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	142	SF	$120	**$17,040**
87151	500.3 to 515.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	75	SF	$120	**$8,940**
87152	515.2 to 517.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
87120	515.8 to 516.8 feet	Vertical Change	.76"	5 ft	5	REF		
87169	517.8 to 552.8 feet	Key Note Segment		5 ft	175			
87121	518.5 to 519.5 feet	Vertical Change	-.28"	5 ft	5	REF		
87122	553.2 to 554.2 feet	Vertical Change	-.32"	5 ft	5	REF		
87153	554.6 to 569.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	72	SF	$120	**$8,640**
87154	571.5 to 584.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	66	SF	$120	**$7,980**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S/E/N	2112161428	WOODLANDS CT	WOODLANDS DR	WOODLANDS DR	79

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87155	588.3 to 591.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	14	SF	$120	**$1,680**
87156	591.4 to 592.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87157	595.0 to 620.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
87123	596.3 to 597.3 feet	**Vertical Change**	.46"	5 ft	5	REF		
87124	622.5 to 623.5 feet	**Vertical Change**	.28"	5 ft	5	REF		
87158	623.0 to 643.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	104	SF	$120	**$12,420**
87125	630.9 to 631.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
87159	643.7 to 654.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	54	SF	$120	**$6,540**
87126	648.8 to 649.8 feet	**Vertical Change**	.37"	5 ft	5	REF		
87127	657.6 to 658.6 feet	**Vertical Change**	.49"	5 ft	5	LF	$75	**$375**
87160	660.8 to 675.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	73	SF	$120	**$8,760**
87128	666.0 to 667.0 feet	**Vertical Change**	.3"	5 ft	5	REF		
87170	673.2 to 674.9 feet		5.0-6.0%	5 ft	9			
87129	674.9 to 675.9 feet	**Vertical Change**	.27"	5 ft	5	REF		

TOTAL COST FOR: S/E/N *side of* **WOODLANDS CT** *Starting at:* **WOODLANDS DR** **$190,245.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161423	WOODLANDS DR	FOREST CT	WOODLANDS CT	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87076	2.0 to 4.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
87077	4.6 to 18.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	71	SF	$120	**$8,520**
87066	8.3 to 9.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
87078	19.7 to 30.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	56	SF	$120	**$6,720**
87079	33.2 to 38.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,940**
87080	39.3 to 54.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$8,940**
87081	57.8 to 59.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
87082	62.3 to 63.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
87083	63.3 to 98.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	175	SF	$120	**$20,940**
87068	90.7 to 91.7 feet	**Vertical Change**	.28"	5 ft	5	REF		
87084	100.7 to 102.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87085	106.1 to 113.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	37	SF	$120	**$4,440**
87069	112.1 to 113.1 feet	**Vertical Change**	.47"	5 ft	5	REF		
87086	114.4 to 127.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	67	SF	$120	**$8,040**
87070	123.3 to 124.3 feet	**Vertical Change**	.41"	5 ft	5	REF		
87087	128.6 to 132.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87071	131.9 to 132.9 feet	**Vertical Change**	.31"	5 ft	5	REF		
87088	135.6 to 136.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
87089	140.0 to 142.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
87072	140.8 to 141.8 feet	**Vertical Change**	.36"	5 ft	5	REF		
87090	144.6 to 150.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
87073	149.7 to 150.7 feet	**Vertical Change**	.48"	5 ft	5	REF		
87091	150.4 to 155.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
87095	155.8 to 180.3 feet	Key Note Segment		5 ft	122			
87074	180.7 to 181.7 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
87092	199.8 to 229.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	151	SF	$120	**$18,060**
87096	229.9 to 253.1 feet	Key Note Segment		5 ft	116			
87075	239.2 to 240.2 feet	**Vertical Change**	1.35"	5 ft	5	REF		

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161423	WOODLANDS DR	FOREST CT	WOODLANDS CT	61

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87093	253.1 to 256.4 feet	Cross Slope (Driveway)	3.0-4.0%	5 ft	16	SF	$40	$660
87094	260.5 to 261.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	$660
87097	269.7 to 271.5 feet		5.0-6.0%	5 ft	9			

TOTAL COST FOR: W *side of* **WOODLANDS DR** *Starting at:* **FOREST CT** **$95,115.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161441	WOODLANDS DR	FOREST LN	HILLCREST CT	54

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87283	0.0 to 14.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	72	SF	$120	**$8,580**
87284	14.7 to 20.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
87285	20.1 to 26.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,540**
87286	27.4 to 33.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
87287	36.6 to 38.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87288	46.9 to 50.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
87289	51.5 to 72.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
87290	73.2 to 80.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	39	SF	$120	**$4,620**
87291	80.9 to 99.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	90	SF	$120	**$10,860**
87292	100.3 to 101.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87276	102.7 to 103.7 feet	**Vertical Change**	-.49"	5 ft	5	LF	$75	**$375**
87293	103.8 to 104.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
87294	107.8 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	15	SF	$120	**$1,800**
87299	110.8 to 131.1 feet	Key Note Segment		5 ft	102			
87277	112.1 to 113.1 feet	**Vertical Change**	.39"	5 ft	5	REF		
87278	131.1 to 132.1 feet	**Vertical Change**	.26"	5 ft	5	REF		
87295	134.1 to 151.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	89	SF	$120	**$10,620**
87279	145.8 to 146.8 feet	**Vertical Change**	.68"	5 ft	5	REF		
87296	151.8 to 160.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	45	SF	$120	**$5,400**
87280	154.7 to 155.7 feet	**Vertical Change**	.27"	5 ft	5	REF		
87281	163.4 to 164.4 feet	**Vertical Change**	.26"	5 ft	5	LF	$75	**$375**
87297	167.8 to 179.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	60	SF	$120	**$7,200**
87282	172.0 to 173.0 feet	**Vertical Change**	.39"	5 ft	5	REF		
87298	185.7 to 197.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	61	SF	$120	**$7,320**

TOTAL COST FOR: E *side of* **WOODLANDS DR** *Starting at:* **FOREST LN** **$84,570.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161446	WOODLANDS DR	HILLCREST CT	SUNSET AVE	50

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87356	0.6 to 5.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	25	SF	$120	**$3,000**
87357	5.9 to 7.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$900**
87358	9.8 to 11.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87359	18.5 to 34.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	79	SF	$120	**$9,480**
87351	31.4 to 32.4 feet	**Vertical Change**	.3"	5 ft	5	REF		
87360	34.3 to 40.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
87361	50.0 to 51.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
87362	53.3 to 57.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
87352	54.0 to 55.0 feet	**Vertical Change**	-.27"	5 ft	5	REF		
87363	57.0 to 62.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	29	SF	$120	**$3,480**
87364	63.3 to 73.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	50	SF	$120	**$5,940**
87353	66.5 to 67.5 feet	**Vertical Change**	.26"	5 ft	5	REF		
87365	73.2 to 79.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	33	SF	$120	**$3,900**
87354	79.7 to 80.7 feet	**Vertical Change**	.35"	5 ft	5	REF		
87366	81.4 to 85.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	20	SF	$120	**$2,400**

TOTAL COST FOR: E *side of* **WOODLANDS DR** *Starting at:* **HILLCREST CT** **$36,360.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161415	WOODLANDS DR	HILLCREST CT	FOREST CT	64

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86997	0.0 to 4.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,820**
86998	4.7 to 18.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	68	SF	$120	**$8,160**
86999	18.3 to 25.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
87000	29.6 to 35.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	31	SF	$120	**$3,660**
87001	35.7 to 53.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	86	SF	$120	**$10,380**
87002	53.0 to 69.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	82	SF	$120	**$9,780**
87003	72.7 to 74.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	8	SF	$120	**$960**
87004	78.3 to 82.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,580**
86992	78.9 to 79.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
87005	82.8 to 84.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
87006	87.5 to 91.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
87007	91.4 to 92.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	5	SF	$120	**$600**
87008	93.1 to 95.4 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	12	SF	$120	**$1,380**
87009	95.4 to 115.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	99	SF	$120	**$11,820**
86993	103.4 to 104.4 feet	**Vertical Change**	.54"	5 ft	5	REF		
87010	115.8 to 151.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	176	SF	$120	**$21,120**
86994	116.5 to 117.5 feet	**Vertical Change**	.47"	5 ft	5	REF		
86995	141.3 to 142.3 feet	**Vertical Change**	-.79"	5 ft	5	REF		
87011	158.7 to 164.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	27	SF	$120	**$3,240**
86996	166.0 to 167.0 feet	**Vertical Change**	.53"	5 ft	5	REF		
87012	166.8 to 176.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	47	SF	$120	**$5,640**
87013	178.3 to 191.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	68	SF	$120	**$8,100**
87014	192.1 to 196.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	24	SF	$120	**$2,880**

TOTAL COST FOR: W *side of* **WOODLANDS DR** *Starting at:* **HILLCREST CT** **$100,860.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161410	WOODLANDS DR	SUNSET AVE	HILLCREST CT	59

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86931	0.9 to 1.9 feet	Vertical Change	.32"	5 ft	5	REF		
86936	1.8 to 6.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	24	SF	$120	**$2,880**
86937	6.6 to 30.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	119	SF	$120	**$14,280**
86932	9.3 to 10.3 feet	Vertical Change	.48"	5 ft	5	REF		
86933	22.9 to 23.9 feet	Vertical Change	.27"	5 ft	5	REF		
86934	28.3 to 29.3 feet	Vertical Change	-.27"	5 ft	5	REF		
86938	30.6 to 32.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
86939	43.9 to 55.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	60	SF	$120	**$7,140**
86935	48.9 to 49.9 feet	Vertical Change	-.68"	5 ft	5	REF		
86940	56.2 to 77.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,020**
86941	78.6 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	21	SF	$120	**$2,520**
86942	80.3 to 83.5 feet		5.0-6.0%	5 ft	16			

TOTAL COST FOR: W *side of* **WOODLANDS DR** *Starting at:* **SUNSET AVE** **$41,040.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161430	WOODLANDS DR	WOODLANDS CT	FOREST LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87182	0.0 to 17.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	86	SF	$120	**$10,260**
87171	10.4 to 11.4 feet	**Vertical Change**	.33"	5 ft	5	REF		
87183	17.7 to 32.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	75	SF	$120	**$9,060**
87184	34.6 to 40.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,420**
87172	35.4 to 36.4 feet	**Vertical Change**	.29"	5 ft	5	REF		
87199	41.0 to 70.8 feet	Key Note Segment		5 ft	149			
87173	50.0 to 51.0 feet	**Vertical Change**	.4"	5 ft	5	REF		
87185	70.8 to 74.8 feet	**Cross Slope (Driveway)**	2.0-3.0%	5 ft	20	SF	$40	**$800**
87186	77.0 to 82.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	29	SF	$120	**$3,480**
87174	81.5 to 82.5 feet	**Vertical Change**	.46"	5 ft	5	REF		
87187	84.9 to 86.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
87188	89.7 to 112.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	115	SF	$120	**$13,740**
87175	90.1 to 91.1 feet	**Vertical Change**	.48"	5 ft	5	REF		
87176	99.0 to 100.0 feet	**Vertical Change**	.34"	5 ft	5	REF		
87189	115.4 to 121.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	31	SF	$120	**$3,660**
87190	123.4 to 124.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$780**
87177	124.5 to 125.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
87191	127.3 to 133.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
87178	135.4 to 136.4 feet	**Vertical Change**	.27"	5 ft	5	LF	$75	**$375**
87192	136.9 to 144.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
87193	146.2 to 154.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	41	SF	$120	**$4,860**
87194	154.9 to 161.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	35	SF	$120	**$4,140**
87179	160.2 to 161.2 feet	**Vertical Change**	-.29"	5 ft	5	REF		
87195	175.2 to 176.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	7	SF	$120	**$840**
87196	178.8 to 193.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	72	SF	$120	**$8,580**
87180	196.6 to 197.6 feet	**Vertical Change**	.6"	5 ft	5	SF	$75	**$375**
87197	200.5 to 208.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	40	SF	$120	**$4,800**
87198	208.5 to 218.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	50	SF	$120	**$5,940**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161430	WOODLANDS DR	WOODLANDS CT	FOREST LN	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
87181	209.1 to 210.1 feet	Vertical Change	.28"	5 ft	5	REF		

TOTAL COST FOR: E *side of* **WOODLANDS DR** *Starting at:* **WOODLANDS CT** **$84,530.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081632	WRENWOOD WAY	FOUNTAIN WAY	KERN ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128202	0.3 to 15.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	62	SF	$120	**$7,392**
128203	16.0 to 20.0 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	16	SF	$120	**$1,920**
128204	20.0 to 21.7 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	7	SF	$120	**$816**
128205	23.3 to 30.2 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	28	SF	$120	**$3,312**
128258	31.9 to 45.8 feet	Key Note Segment		4 ft	56			
128206	46.4 to 48.4 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	8	SF	$40	**$320**
128207	49.0 to 52.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	12	SF	$120	**$1,488**
128208	54.8 to 60.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	23	SF	$120	**$2,736**
128179	55.4 to 56.4 feet	Vertical Change	-.26"	4 ft	4	REF		
128259	60.9 to 74.7 feet	Key Note Segment		4 ft	55			
128180	61.9 to 62.9 feet	Vertical Change	-.29"	4 ft	4	REF		
128209	75.1 to 90.3 feet	Cross Slope (Driveway)	3.0-4.0%	4 ft	61	SF	$40	**$2,432**
128181	88.4 to 89.4 feet	Vertical Change	-.26"	4 ft	4	REF		
128210	90.3 to 99.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,224**
128211	99.4 to 112.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	54	SF	$120	**$6,432**
128260	113.2 to 127.4 feet	Key Note Segment		4 ft	57			
128212	127.7 to 149.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	86	SF	$120	**$10,272**
128213	151.3 to 174.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	93	SF	$120	**$11,184**
128182	161.2 to 162.2 feet	Vertical Change	-.9"	4 ft	4	REF		
128214	174.6 to 178.9 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	17	SF	$120	**$2,064**
128215	179.8 to 183.6 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	15	SF	$120	**$1,824**
128216	183.8 to 186.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	**$1,440**
128217	187.7 to 195.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,696**
128183	192.2 to 193.2 feet	Vertical Change	-.49"	4 ft	4	LF	$75	**$300**
128261	195.4 to 208.8 feet	Key Note Segment		4 ft	54			
128184	195.7 to 196.7 feet	Vertical Change	.34"	4 ft	4	REF		
128218	209.2 to 210.6 feet	Cross Slope (Driveway)	4.0-5.0%	4 ft	6	SF	$40	**$224**
128219	212.7 to 220.2 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	30	SF	$120	**$3,600**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081632	WRENWOOD WAY	FOUNTAIN WAY	KERN ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128262	221.1 to 234.8 feet	Key Note Segment		4 ft	55			
128220	235.5 to 236.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	5	SF	$120	**$624**
128221	239.6 to 243.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	15	SF	$120	**$1,776**
128185	242.0 to 243.0 feet	**Vertical Change**	-.43"	4 ft	4	REF		
128222	243.3 to 248.8 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	22	SF	$120	**$2,640**
128223	253.1 to 254.5 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	**$672**
128224	256.6 to 264.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	31	SF	$120	**$3,744**
128225	264.4 to 270.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	22	SF	$120	**$2,688**
128226	273.5 to 291.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	73	SF	$120	**$8,736**
128186	279.2 to 280.2 feet	**Vertical Change**	-.28"	4 ft	4	REF		
128227	294.4 to 297.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
128187	299.6 to 300.6 feet	**Vertical Change**	-.38"	4 ft	4	REF		
128228	299.8 to 301.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$960**
128263	302.4 to 316.5 feet	Key Note Segment		4 ft	56			
128188	303.0 to 304.0 feet	**Vertical Change**	.32"	4 ft	4	REF		
128229	318.3 to 319.4 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$528**
128189	321.6 to 322.6 feet	**Vertical Change**	.26"	4 ft	4	LF	$75	**$300**
128230	323.5 to 327.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	17	SF	$120	**$2,064**
128264	328.3 to 342.2 feet	Key Note Segment		4 ft	56			
128191	331.8 to 332.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
128231	342.2 to 356.1 feet	**Cross Slope (Driveway)**	4.0-5.0%	4 ft	56	SF	$40	**$2,224**
128192	342.9 to 343.9 feet	**Vertical Change**	-.3"	4 ft	4	REF		
128193	353.7 to 354.7 feet	**Vertical Change**	-.46"	4 ft	4	REF		
128232	357.8 to 369.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	46	SF	$120	**$5,520**
128233	371.3 to 372.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	4	SF	$120	**$528**
128234	379.6 to 380.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
128235	383.5 to 391.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	**$3,600**
128236	391.0 to 395.1 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	16	SF	$120	**$1,968**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081632	WRENWOOD WAY	FOUNTAIN WAY	KERN ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128237	398.8 to 407.4 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	34	SF	$120	**$4,128**
128238	407.4 to 409.8 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	10	SF	$120	**$1,152**
128194	408.3 to 409.3 feet	**Vertical Change**	.99"	4 ft	4	REF		
128265	409.8 to 423.8 feet	Key Note Segment		4 ft	56			
128239	424.6 to 433.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	35	SF	$120	**$4,176**
128240	433.8 to 435.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$720**
128266	436.3 to 450.5 feet	Key Note Segment		4 ft	57			
128241	450.8 to 459.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	36	SF	$120	**$4,320**
128242	462.2 to 463.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
128243	477.8 to 478.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
128195	484.4 to 485.4 feet	**Vertical Change**	-.38"	4 ft	4	LF	$75	**$300**
128244	494.3 to 510.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	64	SF	$120	**$7,680**
128245	510.8 to 514.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	14	SF	$120	**$1,680**
128267	516.5 to 530.8 feet	Key Note Segment		4 ft	57			
128246	531.2 to 533.3 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	8	SF	$40	**$336**
128247	535.5 to 539.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	16	SF	$120	**$1,968**
128248	541.9 to 544.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,152**
128268	544.9 to 558.5 feet	Key Note Segment		4 ft	54			
128196	565.4 to 566.4 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**
128249	586.6 to 600.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
128250	603.7 to 607.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,968**
128198	606.7 to 607.7 feet	**Vertical Change**	1.68"	4 ft	4	REF		
128251	612.3 to 624.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	48	SF	$120	**$5,760**
128269	624.4 to 638.7 feet	Key Note Segment		4 ft	57			
128252	638.7 to 648.4 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	39	SF	$40	**$1,552**
128270	651.5 to 668.3 feet	Key Note Segment		4 ft	67			
128199	668.3 to 669.3 feet	**Vertical Change**	.3"	4 ft	4	REF		
128272	672.8 to 673.8 feet	**Continuous Width**	36"	4 ft	4	SF	$120	**$480**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081632	WRENWOOD WAY	FOUNTAIN WAY	KERN ST	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128253	673.0 to 678.1 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	20	SF	$120	**$2,448**
128254	678.3 to 697.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	77	SF	$120	**$9,216**
128271	707.8 to 721.8 feet	Key Note Segment		4 ft	56			
128255	723.1 to 725.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
128256	725.8 to 744.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	76	SF	$120	**$9,168**
128257	748.5 to 752.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	14	SF	$120	**$1,728**
128201	756.3 to 757.3 feet	**Vertical Change**	.42"	4 ft	4	LF	$75	**$300**

TOTAL COST FOR: N *side of* **WRENWOOD WAY** *Starting at:* **FOUNTAIN WAY** **$175,868.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
N	2202081635	WRENWOOD WAY	KERN ST	TULARE ST	49

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128280	1.8 to 28.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	108	SF	$120	**$12,960**
128281	28.9 to 51.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,608**
128273	42.1 to 43.1 feet	**Vertical Change**	.77"	4 ft	4	REF		
128282	57.1 to 62.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	20	SF	$120	**$2,448**
128283	66.9 to 88.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	88	SF	$120	**$10,560**
128284	92.2 to 94.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,248**
128274	92.8 to 93.8 feet	**Vertical Change**	.78"	4 ft	4	REF		
128285	102.5 to 103.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**
128286	107.8 to 108.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	**$480**
128275	108.2 to 109.2 feet	**Vertical Change**	.44"	4 ft	4	REF		
128287	110.1 to 122.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	51	SF	$120	**$6,096**
128277	122.7 to 123.7 feet	**Vertical Change**	3.41"	4 ft	4	REF		
128288	125.1 to 127.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	10	SF	$120	**$1,200**
128278	128.1 to 129.1 feet	**Vertical Change**	.39"	4 ft	4	LF	$75	**$300**
128289	132.1 to 142.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	42	SF	$120	**$5,040**
128279	148.6 to 149.6 feet	**Vertical Change**	.79"	4 ft	4	REF		
128290	149.0 to 153.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**

TOTAL COST FOR: N *side of* **WRENWOOD WAY** *Starting at:* **KERN ST** **$53,436.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081626	WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128105	0.1 to 19.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	76	SF	$120	**$9,168**
128059	0.8 to 1.8 feet	**Vertical Change**	.31"	4 ft	4	REF		
128060	4.3 to 8.0 feet	**Vertical Change**	.3"	4 ft	15	REF		
128061	8.7 to 9.7 feet	**Vertical Change**	3.38"	4 ft	4	REF		
128062	11.6 to 12.6 feet	**Vertical Change**	.31"	4 ft	4	REF		
128063	13.9 to 14.9 feet	**Vertical Change**	-.27"	4 ft	4	REF		
128106	21.3 to 30.0 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	**$4,176**
128064	27.1 to 34.7 feet	**Vertical Change**	-.28"	4 ft	30	REF		
128107	33.8 to 37.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	**$1,920**
128065	36.2 to 37.2 feet	**Vertical Change**	.26"	4 ft	4	REF		
128067	43.8 to 44.8 feet	**Vertical Change**	.61"	4 ft	4	SF	$75	**$300**
128068	47.0 to 48.0 feet	**Vertical Change**	-.31"	4 ft	4	LF	$75	**$300**
128108	50.6 to 55.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,304**
128069	50.8 to 51.8 feet	**Vertical Change**	.41"	4 ft	4	REF		
128070	54.3 to 55.3 feet	**Vertical Change**	-.41"	4 ft	4	REF		
128071	57.0 to 60.2 feet	**Vertical Change**	.3"	4 ft	13	LF	$75	**$960**
128109	63.1 to 75.7 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$6,048**
128072	65.2 to 68.1 feet	**Vertical Change**	.42"	4 ft	12	REF		
128110	85.2 to 95.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	43	SF	$120	**$5,136**
128073	98.5 to 99.5 feet	**Vertical Change**	-.3"	4 ft	4	LF	$75	**$300**
128074	100.5 to 101.5 feet	**Vertical Change**	.38"	4 ft	4	LF	$75	**$300**
128161	107.9 to 121.6 feet	Key Note Segment		4 ft	55			
128111	122.2 to 123.6 feet	**Cross Slope (Driveway)**	6.0-7.0%	4 ft	6	SF	$40	**$224**
128112	123.6 to 130.0 feet	Cross Slope (PAR)	5.0-6.0%	4 ft	26	SF	$120	**$3,072**
128113	130.0 to 131.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	8	SF	$120	**$912**
128114	132.9 to 133.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$480**
128162	135.2 to 148.8 feet	Key Note Segment		4 ft	54			
128075	151.4 to 152.4 feet	**Vertical Change**	-.49"	4 ft	4	LF	$75	**$300**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081626	WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128115	152.7 to 198.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	182	SF	$120	**$21,888**
128076	153.9 to 154.9 feet	**Vertical Change**	.33"	4 ft	4	REF		
128077	188.1 to 189.1 feet	**Vertical Change**	.33"	4 ft	4	REF		
128116	198.3 to 213.3 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	60	SF	$120	**$7,200**
128163	213.5 to 227.8 feet	Key Note Segment		4 ft	57			
128117	228.9 to 242.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
128164	243.2 to 256.8 feet	Key Note Segment		4 ft	54			
128078	244.3 to 245.3 feet	**Vertical Change**	-.4"	4 ft	4	REF		
128118	257.6 to 260.3 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	11	SF	$120	**$1,296**
128119	262.8 to 265.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	11	SF	$120	**$1,344**
128120	287.6 to 290.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	13	SF	$120	**$1,536**
128079	288.2 to 289.2 feet	**Vertical Change**	-.35"	4 ft	4	REF		
128121	295.3 to 296.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	**$768**
128165	296.9 to 311.1 feet	Key Note Segment		4 ft	57			
128122	313.1 to 320.9 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	31	SF	$120	**$3,744**
128123	325.6 to 341.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	62	SF	$120	**$7,488**
128124	342.6 to 353.0 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	42	SF	$120	**$4,992**
128125	353.2 to 359.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	26	SF	$120	**$3,168**
128080	357.2 to 358.2 feet	**Vertical Change**	.49"	4 ft	4	REF		
128126	360.8 to 368.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	32	SF	$120	**$3,792**
128127	373.6 to 376.6 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	12	SF	$120	**$1,440**
128166	376.7 to 390.5 feet	Key Note Segment		4 ft	55			
128081	378.5 to 379.5 feet	**Vertical Change**	.45"	4 ft	4	REF		
128167	403.0 to 416.9 feet	Key Note Segment		4 ft	56			
128082	429.7 to 430.7 feet	**Vertical Change**	-.53"	4 ft	4	SF	$75	**$300**
128083	437.2 to 438.2 feet	**Vertical Change**	3.2"	4 ft	4	REF		
128128	437.9 to 450.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	50	SF	$120	**$5,952**
128129	452.6 to 463.5 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,232**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081626	WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128130	477.6 to 481.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	15	SF	$120	**$1,776**
128168	483.8 to 498.7 feet	Key Note Segment		4 ft	60			
128131	499.0 to 513.7 feet	**Cross Slope (Driveway)**	2.0-3.0%	4 ft	59	SF	$40	**$2,352**
128169	514.1 to 527.9 feet	Key Note Segment		4 ft	55			
128084	514.6 to 515.6 feet	**Vertical Change**	.28"	4 ft	4	REF		
128132	528.8 to 530.6 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	7	SF	$120	**$864**
128133	534.4 to 545.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
128134	548.2 to 557.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	36	SF	$120	**$4,272**
128085	558.4 to 559.4 feet	**Vertical Change**	.37"	4 ft	4	LF	$75	**$300**
128086	560.8 to 561.8 feet	**Vertical Change**	.85"	4 ft	4	REF		
128135	560.8 to 571.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	**$5,280**
128087	563.3 to 564.3 feet	**Vertical Change**	.34"	4 ft	4	REF		
128088	567.8 to 568.8 feet	**Vertical Change**	-.26"	4 ft	4	REF		
128136	576.7 to 590.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	54	SF	$120	**$6,528**
128170	590.8 to 604.8 feet	Key Note Segment		4 ft	56			
128137	608.2 to 616.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,128**
128171	618.4 to 631.9 feet	Key Note Segment		4 ft	54			
128089	633.0 to 634.0 feet	**Vertical Change**	.27"	4 ft	4	REF		
128138	633.3 to 634.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	4	SF	$120	**$528**
128139	638.6 to 648.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	39	SF	$120	**$4,656**
128178	651.8 to 652.8 feet	**Protruding Object**	60"	4 ft	4	JOB	$99	**$99**
128140	664.6 to 669.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	19	SF	$120	**$2,256**
128141	671.1 to 683.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	51	SF	$120	**$6,096**
128142	684.0 to 686.1 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	8	SF	$120	**$1,008**
128143	688.2 to 691.3 feet	Cross Slope (PAR)	6.0-7.0%	4 ft	12	SF	$120	**$1,488**
128090	689.1 to 690.1 feet	**Vertical Change**	.28"	4 ft	4	REF		
128144	692.1 to 695.8 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	15	SF	$120	**$1,776**
128145	696.4 to 697.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	5	SF	$120	**$576**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081626	WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128172	698.3 to 712.6 feet	Key Note Segment		4 ft	57			
128091	700.8 to 701.8 feet	Vertical Change	.3"	4 ft	4	REF		
128146	712.6 to 713.8 feet	Cross Slope (Driveway)	2.0-3.0%	4 ft	5	SF	$40	$192
128092	715.5 to 716.5 feet	Vertical Change	.49"	4 ft	4	LF	$75	$300
128093	721.1 to 722.1 feet	Vertical Change	.41"	4 ft	4	LF	$75	$300
128094	723.3 to 724.3 feet	Vertical Change	-.26"	4 ft	4	LF	$75	$300
128173	726.1 to 739.3 feet	Key Note Segment		4 ft	53			
128095	740.8 to 741.8 feet	Vertical Change	1"	4 ft	4	REF		
128147	740.9 to 741.9 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	4	SF	$120	$480
128148	744.4 to 755.4 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	44	SF	$120	$5,280
128149	755.4 to 758.7 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	13	SF	$120	$1,584
128096	771.2 to 772.2 feet	Vertical Change	-.32"	4 ft	4	LF	$75	$300
128150	780.7 to 788.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	32	SF	$120	$3,888
128097	794.6 to 795.6 feet	Vertical Change	-1.08"	4 ft	4	SF	$75	$300
128151	795.8 to 797.4 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	6	SF	$120	$768
128098	797.0 to 798.0 feet	Vertical Change	.33"	4 ft	4	REF		
128174	805.1 to 819.7 feet	Key Note Segment		4 ft	58			
128152	822.8 to 830.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	30	SF	$120	$3,600
128175	832.9 to 846.1 feet	Key Note Segment		4 ft	53			
128153	847.5 to 851.6 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	16	SF	$120	$1,968
128100	851.7 to 852.7 feet	Vertical Change	.35"	4 ft	4	LF	$75	$300
128154	867.5 to 876.2 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	35	SF	$120	$4,176
128155	882.0 to 883.0 feet	Cross Slope (PAR)	7.0-8.0%	4 ft	4	SF	$120	$480
128101	883.7 to 884.7 feet	Vertical Change	-1.41"	4 ft	4	SF	$75	$300
128156	887.8 to 899.8 feet	Cross Slope (PAR)	4.0-5.0%	4 ft	48	SF	$120	$5,760
128102	898.3 to 899.3 feet	Vertical Change	-.4"	4 ft	4	REF		
128157	899.8 to 901.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	6	SF	$120	$720
128176	912.5 to 926.7 feet	Key Note Segment		4 ft	57			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202081626	WRENWOOD WAY	TULARE ST	FOUNTAIN WAY	76

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
128158	928.4 to 931.0 feet	Cross Slope (PAR)	3.0-4.0%	4 ft	10	SF	$120	**$1,248**
128159	931.0 to 939.3 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	33	SF	$120	**$3,984**
128177	939.3 to 953.9 feet	Key Note Segment		4 ft	58			
128103	965.6 to 966.6 feet	**Vertical Change**	-.29"	4 ft	4	LF	$75	**$300**
128104	971.9 to 972.9 feet	**Vertical Change**	.36"	4 ft	4	LF	$75	**$300**
128160	977.4 to 985.8 feet	Cross Slope (PAR)	2.0-3.0%	4 ft	34	SF	$120	**$4,032**

TOTAL COST FOR: S *side of* **WRENWOOD WAY** *Starting at:* **TULARE ST** **$202,691.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
S	2202111453	YEAGER RD	AIRPORT DR	3051 AIRPORT DR	45

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
133781	0.0 to 1.1 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
133782	2.1 to 8.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,660**
133775	3.2 to 4.2 feet	**Vertical Change**	.59"	5 ft	5	REF		
133783	8.9 to 19.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	52	SF	$120	**$6,240**
133776	11.9 to 12.9 feet	**Vertical Change**	.27"	5 ft	5	REF		
133777	20.3 to 21.3 feet	**Vertical Change**	.29"	5 ft	5	REF		
133784	20.8 to 32.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	57	SF	$120	**$6,840**
133785	34.2 to 46.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	63	SF	$120	**$7,620**
133786	49.3 to 53.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
133787	54.3 to 58.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
133778	54.8 to 55.8 feet	**Vertical Change**	1.98"	5 ft	5	REF		
133788	61.5 to 120.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	296	SF	$120	**$35,520**
133779	72.1 to 73.1 feet	**Vertical Change**	.28"	5 ft	5	REF		
133789	123.2 to 124.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$840**
133790	128.0 to 137.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	47	SF	$120	**$5,580**
133791	139.8 to 141.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$840**
133792	143.8 to 157.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	68	SF	$120	**$8,220**
133795	157.5 to 188.7 feet	Key Note Segment		5 ft	156			
133780	179.9 to 180.9 feet	**Vertical Change**	.26"	5 ft	5	REF		
133793	188.7 to 197.5 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	44	SF	$40	**$1,760**
133794	197.8 to 204.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,260**

TOTAL COST FOR: S *side of* **YEAGER RD** *Starting at:* **AIRPORT DR** **$86,660.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161208	ZAK WAY	491ZAK WAY	473 ZAK WAY	62

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86309	3.4 to 4.7 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$780**
86310	4.7 to 7.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	16	SF	$120	**$1,860**
86311	10.3 to 12.3 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	10	SF	$120	**$1,200**
86312	12.3 to 13.5 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	6	SF	$120	**$720**
86313	14.2 to 24.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	50	SF	$120	**$5,940**
86317	25.8 to 47.0 feet	Key Note Segment		5 ft	106			
86308	36.6 to 37.6 feet	**Vertical Change**	.34"	5 ft	5	REF		
86314	48.3 to 69.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,720**
86315	71.7 to 74.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,380**
86318	74.3 to 98.5 feet	Key Note Segment		5 ft	121			
86316	99.2 to 100.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	7	SF	$120	**$780**

TOTAL COST FOR: E *side of* **ZAK WAY** *Starting at:* **491ZAK WAY** **$25,380.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161158	ZAK WAY	AVALON AVE	KELSEY LN	65

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86195	1.2 to 20.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	95	SF	$120	**$11,340**
86196	23.9 to 58.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	172	SF	$120	**$20,640**
86192	58.1 to 59.1 feet	**Vertical Change**	.27"	5 ft	5	REF		
86197	58.3 to 61.8 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	18	SF	$120	**$2,100**
86198	63.5 to 84.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	106	SF	$120	**$12,660**
86199	87.3 to 90.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	15	SF	$120	**$1,740**
86200	91.0 to 100.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	49	SF	$120	**$5,820**
86193	98.1 to 99.1 feet	**Vertical Change**	-.37"	5 ft	5	REF		
86201	101.3 to 123.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	112	SF	$120	**$13,380**
86194	125.3 to 126.3 feet	**Vertical Change**	-.29"	5 ft	5	LF	$75	**$375**
86202	126.5 to 133.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	35	SF	$120	**$4,200**
86203	136.0 to 148.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	64	SF	$120	**$7,680**

TOTAL COST FOR: W *side of* **ZAK WAY** *Starting at:* **AVALON AVE** **$79,935.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161207	ZAK WAY	CAMBRIA AVE	455 ZAK WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86282	2.6 to 6.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
86283	7.4 to 12.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	28	SF	$120	**$3,300**
86284	13.7 to 19.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	31	SF	$120	**$3,660**
86303	20.3 to 42.0 feet	Key Note Segment		5 ft	109			
86266	21.3 to 22.3 feet	**Vertical Change**	-.27"	5 ft	5	REF		
86285	43.8 to 49.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
86304	49.8 to 69.9 feet	Key Note Segment		5 ft	101			
86286	70.3 to 78.4 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	41	SF	$40	**$1,620**
86267	77.4 to 78.4 feet	**Vertical Change**	.26"	5 ft	5	REF		
86287	81.2 to 84.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	16	SF	$120	**$1,920**
86288	87.0 to 99.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	64	SF	$120	**$7,620**
86268	95.6 to 96.6 feet	**Vertical Change**	.28"	5 ft	5	REF		
86289	99.7 to 106.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,260**
86269	100.0 to 101.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
86305	106.9 to 127.6 feet	Key Note Segment		5 ft	104			
86270	107.1 to 108.1 feet	**Vertical Change**	-.28"	5 ft	5	REF		
86271	133.6 to 134.6 feet	**Vertical Change**	.61"	5 ft	5	SF	$75	**$375**
86290	135.4 to 140.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,060**
86273	140.4 to 141.4 feet	**Vertical Change**	.63"	5 ft	5	REF		
86291	143.4 to 145.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	10	SF	$120	**$1,140**
86274	143.5 to 144.5 feet	**Vertical Change**	1.08"	5 ft	5	REF		
86275	145.5 to 146.5 feet	**Vertical Change**	.29"	5 ft	5	LF	$75	**$375**
86276	148.1 to 149.1 feet	**Vertical Change**	1.04"	5 ft	5	SF	$75	**$375**
86277	150.4 to 153.5 feet	**Vertical Change**	.27"	5 ft	16	LF	$75	**$1,163**
86278	155.5 to 156.5 feet	**Vertical Change**	-.27"	5 ft	5	LF	$75	**$375**
86292	156.9 to 158.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$660**
86293	161.2 to 172.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	56	SF	$120	**$6,660**
86294	172.3 to 181.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	46	SF	$120	**$5,460**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161207	ZAK WAY	CAMBRIA AVE	455 ZAK WAY	58

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86306	182.8 to 203.6 feet	Key Note Segment		5 ft	104			
86295	205.4 to 207.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	12	SF	$120	**$1,440**
86296	207.8 to 210.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86297	210.2 to 212.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
86307	213.4 to 234.8 feet	Key Note Segment		5 ft	107			
86279	224.8 to 225.8 feet	**Vertical Change**	.52"	5 ft	5	REF		
86298	236.9 to 238.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
86299	238.8 to 242.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,400**
86281	241.7 to 242.7 feet	**Vertical Change**	.29"	5 ft	5	REF		
86300	245.7 to 249.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
86301	249.6 to 254.9 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	27	SF	$120	**$3,180**
86302	254.9 to 259.0 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: E *side of* **ZAK WAY** *Starting at:* **CAMBRIA AVE** **$62,902.50**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161204	ZAK WAY	DIANE WAY	CAMBRIA AVE	46

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86249	0.6 to 16.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	79	SF	$120	**$9,480**
86250	19.3 to 23.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
86251	24.6 to 26.9 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
86252	28.3 to 34.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
86253	39.1 to 53.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
86254	53.9 to 61.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	37	SF	$120	**$4,440**
86255	64.5 to 72.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	40	SF	$120	**$4,740**
86256	76.5 to 86.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	51	SF	$120	**$6,060**
86257	89.8 to 95.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	30	SF	$120	**$3,600**
86258	98.1 to 101.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	19	SF	$120	**$2,280**
86259	104.3 to 107.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,800**
86260	110.3 to 124.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	70	SF	$120	**$8,400**
86264	125.6 to 141.8 feet	Key Note Segment		5 ft	81			
86247	134.5 to 135.5 feet	**Vertical Change**	.33"	5 ft	5	REF		
86261	142.1 to 146.8 feet	**Cross Slope (Driveway)**	3.0-4.0%	5 ft	24	SF	$40	**$940**
86262	147.6 to 151.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	19	SF	$120	**$2,220**
86263	151.5 to 152.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
86265	151.8 to 153.2 feet		5.0-6.0%	5 ft	7			
86248	153.2 to 154.2 feet	**Vertical Change**	.32"	5 ft	5	LF	$75	**$375**

TOTAL COST FOR: W *side of* **ZAK WAY** *Starting at:* **DIANE WAY** **$61,075.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161201	ZAK WAY	KELSEY LN	KIMMEL AVE	92

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86208	0.0 to 16.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	81	SF	$120	**$9,720**
86209	19.4 to 22.9 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	18	SF	$120	**$2,100**
86210	25.7 to 55.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	149	SF	$120	**$17,880**
86211	58.5 to 70.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	59	SF	$120	**$7,080**
86204	58.9 to 59.9 feet	**Vertical Change**	.38"	5 ft	5	REF		
86212	70.8 to 72.4 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$960**
86213	73.7 to 85.3 feet	Cross Slope (PAR)	9.0-10.0%	5 ft	58	SF	$120	**$6,960**
86220	81.3 to 83.8 feet		5.0-6.0%	5 ft	13			
86221	81.3 to 83.8 feet	Running Slope	5.0-6.0%	5 ft	13	SF	$120	**$1,500**
86205	81.4 to 82.4 feet	**Vertical Change**	-2.14"	5 ft	5	REF		
86214	85.8 to 88.1 feet	Cross Slope (PAR)	7.0-8.0%	5 ft	12	SF	$120	**$1,380**
86206	88.6 to 89.6 feet	**Vertical Change**	.54"	5 ft	5	SF	$75	**$375**
86215	92.9 to 97.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,520**
86216	100.0 to 102.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	11	SF	$120	**$1,260**
86217	104.4 to 125.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	107	SF	$120	**$12,780**
86218	128.8 to 139.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	51	SF	$120	**$6,180**
86207	135.9 to 136.9 feet	**Vertical Change**	-.26"	5 ft	5	REF		
86219	145.9 to 149.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	18	SF	$120	**$2,160**
86222	147.2 to 149.5 feet		5.0-6.0%	5 ft	12			
86223	147.2 to 149.5 feet	Running Slope	5.0-6.0%	5 ft	12	SF	$120	**$1,380**

TOTAL COST FOR: W *side of* **ZAK WAY** *Starting at:* **KELSEY LN** **$74,235.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161036	ZAK WAY	KIMMEL AVE	AVALON AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85293	2.3 to 3.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
85294	7.3 to 8.4 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$660**
85319	21.3 to 40.3 feet	Key Note Segment		5 ft	95			
85281	29.6 to 30.6 feet	**Vertical Change**	.3"	5 ft	5	REF		
85282	31.6 to 32.6 feet	**Vertical Change**	3.6"	5 ft	5	REF		
85295	41.0 to 42.1 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	6	SF	$120	**$660**
85296	47.4 to 48.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	8	SF	$120	**$900**
85297	51.3 to 53.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
85320	55.1 to 76.9 feet	Key Note Segment		5 ft	109			
85298	80.3 to 90.7 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	52	SF	$120	**$6,240**
85299	96.8 to 98.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
85300	102.2 to 107.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	27	SF	$120	**$3,240**
85301	109.8 to 110.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
85302	111.1 to 113.2 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,260**
85303	115.8 to 119.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**
85304	120.5 to 123.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	14	SF	$120	**$1,680**
85305	126.8 to 128.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	6	SF	$120	**$720**
85321	128.0 to 157.8 feet	Key Note Segment		5 ft	149			
85283	139.8 to 140.8 feet	**Vertical Change**	.48"	5 ft	5	REF		
85284	148.0 to 149.0 feet	**Vertical Change**	.32"	5 ft	5	REF		
85306	158.3 to 191.4 feet	**Cross Slope (Driveway)**	4.0-5.0%	5 ft	165	SF	$40	**$6,620**
85322	191.4 to 220.8 feet	Key Note Segment		5 ft	147			
85285	192.5 to 193.5 feet	**Vertical Change**	.55"	5 ft	5	REF		
85286	215.8 to 216.8 feet	**Vertical Change**	1.07"	5 ft	5	REF		
85287	217.6 to 218.6 feet	**Vertical Change**	.39"	5 ft	5	REF		
85288	220.8 to 221.8 feet	**Vertical Change**	.34"	5 ft	5	REF		
85307	222.9 to 228.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	30	SF	$120	**$3,600**
85323	229.3 to 257.2 feet	Key Note Segment		5 ft	140			

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112161036	ZAK WAY	KIMMEL AVE	AVALON AVE	75

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
85308	260.1 to 268.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	41	SF	$120	**$4,920**
85309	268.3 to 290.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	109	SF	$120	**$13,020**
85324	290.0 to 310.5 feet	Key Note Segment		5 ft	103			
85310	312.8 to 321.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	44	SF	$120	**$5,220**
85311	331.6 to 335.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	18	SF	$120	**$2,160**
85312	338.2 to 343.2 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	25	SF	$120	**$3,000**
85313	346.0 to 347.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	8	SF	$120	**$900**
85325	348.2 to 369.0 feet	Key Note Segment		5 ft	104			
85314	369.8 to 375.6 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	29	SF	$120	**$3,480**
85291	378.0 to 379.0 feet	**Vertical Change**	-.29"	5 ft	5	REF		
85315	378.3 to 383.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	28	SF	$120	**$3,360**
85292	393.9 to 394.9 feet	**Vertical Change**	.45"	5 ft	5	REF		
85316	394.4 to 396.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,140**
85317	399.2 to 411.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	62	SF	$120	**$7,440**
85318	412.2 to 416.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	21	SF	$120	**$2,460**

TOTAL COST FOR: E *side of* **ZAK WAY** *Starting at:* **KIMMEL AVE** **$79,220.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112161202	ZAK WAY	KIMMEL AVE	DIANE WAY	66

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
86228	0.0 to 2.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	11	SF	$120	**$1,380**
86229	3.8 to 5.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	9	SF	$120	**$1,080**
86230	13.9 to 21.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	36	SF	$120	**$4,320**
86231	36.6 to 39.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	15	SF	$120	**$1,740**
86224	36.8 to 37.8 feet	**Vertical Change**	-.41"	5 ft	5	REF		
86232	44.3 to 46.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	10	SF	$120	**$1,200**
86233	46.3 to 48.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	11	SF	$120	**$1,320**
86234	51.8 to 58.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	33	SF	$120	**$3,900**
86235	58.6 to 64.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	30	SF	$120	**$3,600**
86236	66.3 to 67.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86237	73.2 to 75.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	13	SF	$120	**$1,560**
86225	73.3 to 74.3 feet	**Vertical Change**	-.36"	5 ft	5	REF		
86238	86.2 to 89.6 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
86239	89.8 to 92.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	13	SF	$120	**$1,500**
86240	93.1 to 97.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	21	SF	$120	**$2,520**
86241	97.6 to 106.6 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	45	SF	$120	**$5,400**
86242	109.4 to 118.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	47	SF	$120	**$5,640**
86243	121.5 to 125.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
86226	123.5 to 124.5 feet	**Vertical Change**	.29"	5 ft	5	REF		
86244	127.9 to 136.9 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	45	SF	$120	**$5,400**
86245	137.3 to 138.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	5	SF	$120	**$600**
86246	145.6 to 147.1 feet		5.0-6.0%	5 ft	8			
86227	149.2 to 150.2 feet	**Vertical Change**	.53"	5 ft	5	SF	$75	**$375**

TOTAL COST FOR: W *side of* **ZAK WAY** *Starting at:* **KIMMEL AVE** **$46,515.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2112151616	ZAK WAY	REN WAY	WINTER WAY	43

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84609	3.1 to 6.8 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	19	SF	$120	**$2,220**
84610	10.3 to 17.5 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	36	SF	$120	**$4,320**
84611	19.7 to 35.4 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	79	SF	$120	**$9,420**
84623	35.4 to 55.3 feet	Key Note Segment		5 ft	100			
84612	59.3 to 60.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	5	SF	$120	**$600**
84624	61.4 to 81.3 feet	Key Note Segment		5 ft	100			
84613	82.9 to 103.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	101	SF	$120	**$12,060**
84606	96.2 to 97.2 feet	**Vertical Change**	.28"	5 ft	5	REF		
84614	104.4 to 106.5 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	11	SF	$120	**$1,260**
84607	107.6 to 108.6 feet	**Vertical Change**	.26"	5 ft	5	REF		
84615	108.3 to 119.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	55	SF	$120	**$6,540**
84616	121.5 to 129.0 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	38	SF	$120	**$4,500**
84625	129.7 to 151.2 feet	Key Note Segment		5 ft	108			
84617	151.2 to 152.8 feet	**Cross Slope (Driveway)**	5.0-6.0%	5 ft	8	SF	$40	**$320**
84618	156.1 to 157.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	6	SF	$120	**$720**
84619	160.2 to 180.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	101	SF	$120	**$12,060**
84608	164.1 to 165.1 feet	**Vertical Change**	.4"	5 ft	5	REF		
84620	180.8 to 182.8 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	10	SF	$120	**$1,200**
84621	186.7 to 190.1 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	17	SF	$120	**$2,040**
84622	197.3 to 206.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	44	SF	$120	**$5,220**

TOTAL COST FOR: E *side of* **ZAK WAY** *Starting at:* **REN WAY** **$62,480.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2112151627	ZAK WAY	WINTER WAY	REN WAY	41

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
84756	3.4 to 4.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	7	SF	$120	**$780**
84757	7.4 to 17.2 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	49	SF	$120	**$5,880**
84758	17.8 to 19.3 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	8	SF	$120	**$900**
84759	21.7 to 23.1 feet	Cross Slope (PAR)	6.0-7.0%	5 ft	7	SF	$120	**$840**
84760	27.2 to 31.1 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,340**
84761	39.3 to 43.6 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	22	SF	$120	**$2,580**
84762	45.9 to 92.7 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	234	SF	$120	**$28,080**
84754	64.0 to 65.0 feet	**Vertical Change**	.31"	5 ft	5	REF		
84763	92.8 to 98.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	26	SF	$120	**$3,120**
84764	100.4 to 104.3 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	20	SF	$120	**$2,340**
84765	110.1 to 115.3 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	26	SF	$120	**$3,120**
84766	115.5 to 128.5 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	65	SF	$120	**$7,800**
84767	129.9 to 130.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	5	SF	$120	**$600**
84768	133.8 to 144.5 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	53	SF	$120	**$6,420**
84769	142.1 to 143.7 feet		5.0-6.0%	5 ft	8			
84755	144.1 to 145.1 feet	**Vertical Change**	.35"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ZAK WAY** *Starting at:* **WINTER WAY** **$64,800.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
W	2202071627	ZAPATA ST	E ELLIS ST	LA JOLLA WY	21

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125274	0.0 to 4.8 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	24	SF	$120	**$2,880**
125275	5.9 to 10.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	22	SF	$120	**$2,640**
125272	21.1 to 22.1 feet	**Vertical Change**	.64"	5 ft	5	SF	$75	**$375**
125276	46.4 to 72.3 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	130	SF	$120	**$15,540**
125273	70.1 to 71.1 feet	**Vertical Change**	-.36"	5 ft	5	REF		

TOTAL COST FOR: W *side of* **ZAPATA ST** *Starting at:* **E ELLIS ST** **$21,435.00**

Funding Source: TBD **Year to be Completed** TBD

Street Side	Run ID	Survey Street Name	Starting Street Name	End Street Name	Priority
E	2202071625	ZAPATA ST	LA JOLLA WY	E ELLIS ST	26

ID	Dist. from Corner	Barrier Type	As-is Measurement/Notes	Sidewalk Width	Qty	Unit	Cost	Total
125264	0.0 to 4.0 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	20	SF	$120	**$2,400**
125265	6.6 to 16.7 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	51	SF	$120	**$6,060**
125266	16.8 to 20.8 feet	Cross Slope (PAR)	5.0-6.0%	5 ft	20	SF	$120	**$2,400**
125267	22.4 to 34.2 feet	Cross Slope (PAR)	3.0-4.0%	5 ft	59	SF	$120	**$7,080**
125268	36.3 to 46.0 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	49	SF	$120	**$5,820**
125269	47.2 to 53.9 feet	Cross Slope (PAR)	4.0-5.0%	5 ft	34	SF	$120	**$4,020**
125270	55.1 to 57.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	12	SF	$120	**$1,380**
125271	61.8 to 69.4 feet	Cross Slope (PAR)	2.0-3.0%	5 ft	38	SF	$120	**$4,560**

TOTAL COST FOR: E *side of* **ZAPATA ST** *Starting at:* **LA JOLLA WY** **$33,720.00**

Total Cost for City Sidewalks: **$299,683,125.13**

APPENDIX D: ACCESS COMPLIANCE SURVEY REPORT OF CURB RAMPS

City of Madera

Appendix D: Curb Ramps

Access Compliance Survey Report

April 2024
SSA Project # 20029

NORTHERN CALIFORNIA
100 BUSH STREET, SUITE 1425, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.533.8771
WWW.SWAGENCY.COM

Table of Contents

I. Access Compliance Survey Report
    i. Report Navigation and Legend Abbreviations

II. Curb Ramp List

III. Cost Summary

IV. Survey Data for Curb Ramps

NAVIGATION & LEGEND

April 2024
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

City of Madera Access Compliance Survey Report - Curb Ramps **10TH ST**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1448	5 10Th St	9 S B St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

1 E

3 Perpendicular

2 4334 Ramp Slope

4

• *As-Built Description:*

6 Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 10.4%

• *Proposed Solution:*

7 Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

8

10 *CBC 2019* **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
11 *PROWAG* **R304.2.2**

Unit Cost **$6500.00**

12 Priority **80**

13 14

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.4
Right Flare	(%)	**12.3**
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

1. **Orientation:** Corresponds to the specifi corner/curb ramp in any given intersection, unique to each corner/curb ramp (in some cases there is more than one curb ramp per corner, or no curb ramp):
2. **Locator Number:** Corresponds to a unique database record tied to the specifi curb ramp which can be crossreferenced across this database and its corresponding GIS database.
   - NW, SW, SE, and NE are the most commonly used directions;
   - NNE, ENE, ESE, SSE, SSW, WSW, WNW, and NNW identify individual curb ramps in situations involving multiple curbs ramps at one corner.
3. **Ramp Type:** Identifie the type of curb ramp (parallel, perpendicular, curb ramp required, etc.).
4. **Specific Item** Category of accessible feature in which the barrier belongs.
5. **Survey Street:** Survey street name.
6. **Field Condition:** Description of as-built barrier based on applicable accessibility codes.
7. **Measurement:** Existing condition/dimension featured on the ramp measured as the most severe barrier on the particular ramp.
8. **Proposed Solution:** Description of steps necessary to remove barrier and, if applicable, an interim solution or notes.
9. **Cross Street:** Cross/intersecting street name.
10. **Codes / Info:**
    - PROWAG: Guidelines to enforce Federal accessibility standards in the public rights-of-way.
    - ADAAG/ADA 2010: The Federal Standard for accessibility adopted by the Department of Justice.
    - CBC 2007/ CBC 2019 The California Building Codes.
11. **Unit Cost:** Estimated cost specifi solution per one unit. (The fina cost of barrier removal may exceed this estimate based on the year of mitigation, design approach and chosen method of mitigation)
12. **Priority:** Priority number assigned to specifi barrier based on priorization criteria which include: expected frequency of use and severity of the barrier. Measureed on a scale of 0 to 200, with 200 being the highest priority and 0 being the least.
13. **Ramp Features:** Features of curb ramp measured to determine accessibility.
14. **Measurements:** Existing condition/dimension determined for each ramp.
    - (in) measurement in inches
    - (%) measurement in percentage grade
    - **BOLD** text indicate non-compliant dimensions.
    - Normal text indicate compliant dimensions

LEGEND ABBREVIATIONS

ADA	Americans with Disabilities Act
ADAAG	ADA Accessibility Guidelines
E	East
Fig.	Figure
JOB	per one job (lump sum)
lbs.	Pounds
LF	Linear foot
MUTCD	Manual on Uniform Traffic Control Devices
N	North
NE	Northeast
NW	Northwest
NWn	Northwest: North side
NWs	Northwest: South side
POT	Path of travel
PROW	Public Right-of-Way
PROWAG	Public Right-of-Way Accesible Guidelines
Qty	Quantity
REF	Reference; Provided in locations with overlapping issue; indicates no addition cost required for mitigation
S	South
SE	Southeast
SF	Square foot
SW	Southwest
TBD	To be determined
W	West



Figure 1. Orientation map corresponding to the specifi corner/curb ramp in any given intersection.

MEASUREMENT BREAKDOWN

FEATURE:	ADA/CBC GUIDELINE
Street Grade	*Used for reference in regards to possible exceptions*
Width of Ramp	The clear width of curb ramp runs (excluding any flare sides), blended transitions, and turning spaces shall be 48 inches minimum.
Slope of the Ramp	Ramp runs shall have a running slope not steeper than 1:12 (8.3%).
X Slope of the Ramp	The cross slope of curb ramps and blended transitions shall be 1:48 (2.0%) maximum.
Top Landing Length	Landings shall be provided at the tops of curb ramps and blended transitions. The landing clear length shall be 48 inches minimum.
Top Landing Slope	The slope of the landing in all directions shall be 1:48 (2.0%) maximum.
Top Landing X Slope	The slope of the landing in all directions shall be 1:48 (2.0%) maximum.
Bottom Landing Length	(Parallel Curb Ramp) A turning space 48 inches minimum by 48 inches minimum shall be provided at the bottom of the curb ramp.
Bottom Landing Slope	(Parallel Curb Ramp) The slope of the turning space in all directions shall be 1:48 (2.0%) maximum.
Bottom Landing X Slope	(Parallel Curb Ramp) The slope of the turning space in all directions shall be 1:48 (2.0%) maximum.
Left Flare	Where provided, curb ramp flare shall not be steeper than 1:10 (10.0%).
Right Flare	Where provided, curb ramp flare shall not be steeper than 1:10 (10.0%).
Gutter Lip	The adjacent surfaces at transitions at curb ramps to walks, gutters, and streets shall be at the same level.
Gutter Slope	Counter slopes of adjoining gutters and road surfaces immediately adjacent to and within 24 inches of the curb ramp shall not be steeper than 1:20 (5.0%).
Gutter X Slope	The cross slope of curb ramps and blended transitions shall be 1:48 (2.0%) maximum.
Truncated Domes	Curb ramps and blended transitions shall have detectable warnings.
Dome Setback	Detectable warnings shall be located so the edge nearest the curb is 6 inches minimum and 8 inches maximum from the line at the face of the curb marking the transition between the curb and the gutter, street or highway or flus at the transition for a paralell curb ramp and island cut-through.
Within Crosswalk	The bottom of curb ramps shall have a clear space 48 inches minimum outside active traffic lanes of the roadway

CURB RAMP LIST

April 2024
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

10th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1448 10th St and S B St			
4334	**Perpendicular**	**E**	**Ramp Slope**
4333	**Perpendicular**	**N**	**Ramp Landing**
4331	**Perpendicular**	**S**	**Ramp Landing**
4332	**Perpendicular**	**W**	**Ramp Landing**
1287 10th St and S D St			
3676	**Perpendicular**	**E**	**Ramp Slope**
3679	**Perpendicular**	**N**	**Ramp Slope**
3677	**Perpendicular**	**S**	**Ramp Landing**
3678	**Perpendicular**	**W**	**Ramp Landing**
755 10th St and S E St			
4397	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4396	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4398	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

11Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1360 11Th St and S A St			
3620	**Perpendicular**	**E**	**Ramp Landing**
3619	**Perpendicular**	**N**	**Gutter**
3617	**Parallel**	**S**	**Ramp Landing**
3618	**Perpendicular**	**W**	**Ramp Slope**
1361 11Th St and S B St			
3615	**Perpendicular**	**E**	**Ramp Slope**
3614	**Perpendicular**	**N**	**Ramp Slope**
3616	**Perpendicular**	**S**	**Ramp Slope**
3613	**Perpendicular**	**W**	**Ramp Slope**
1380 11Th St and S D St			
3606	**Perpendicular**	**E**	**Ramp Slope**
3607	**Perpendicular**	**N**	**Ramp Slope**
3605	**Perpendicular**	**S**	**Ramp Landing**
3608	**Perpendicular**	**W**	**Ramp Slope**

12Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
726 12Th St and Roosevelt Ave			
3350	**Perpendicular**	**NW**	**Gutter**
3352	**Curb Ramp Required**	**SE**	**Access Route**

3351	**Perpendicular**	**SW**	**Gutter**

1359 12Th St and S A St

3621	**Perpendicular**	**E**	**Ramp Slope**
3622	**Perpendicular**	**N**	**Ramp Slope**
3624	**Perpendicular**	**S**	**Ramp Slope**
3623	**Perpendicular**	**W**	**Ramp Slope**

1358 12Th St and S B St

3625	**Perpendicular**	**E**	**Ramp Slope**
3626	**Perpendicular**	**N**	**Ramp Slope**
3628	**Perpendicular**	**S**	**Ramp Slope**
3627	**Perpendicular**	**W**	**Ramp Slope**

1418 12Th St and S C St

3598	**Perpendicular**	**E**	**Ramp Slope**
3599	**Perpendicular**	**N**	**Ramp Slope**
3597	**Perpendicular**	**S**	**Ramp Slope**
3600	**Perpendicular**	**W**	**Ramp Slope**

1449 12Th St and S D St

3602	**Perpendicular**	**E**	**Ramp Slope**
3601	**Perpendicular**	**N**	**Ramp Slope**
3603	**Perpendicular**	**S**	**Ramp Slope**
3604	**Perpendicular**	**W**	**Ramp Slope**

1414 12Th St and S G St

3077	**Perpendicular**	**NE**	**Ramp Flare**
3078	**Perpendicular**	**NW**	**Ramp Slope**
3076	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3075	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1275 12Th St and S Lake St

3349	**Perpendicular**	**NE**	**Ramp Slope**
3347	**Perpendicular**	**NW**	**Ramp Slope**
3348	**Curb Ramp Required**	**SW**	**Access Route**

13Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1267 13Th St and S A St

3434	**Curb Ramp Required**	**E**	**Access Route**
3432	**Perpendicular**	**S**	**Ramp Slope**
3433	**Perpendicular**	**W**	**Ramp Landing**

1268 13Th St and S B St

3438	**Perpendicular**	**E**	**Ramp Landing**
3435	**Perpendicular**	**N**	**Ramp Slope**
3437	**Perpendicular**	**S**	**Ramp Slope**
3436	**Perpendicular**	**W**	**Ramp Slope**

942 13Th St and S C St

3594	**Perpendicular**	**E**	**Ramp Slope**
3595	**Perpendicular**	**N**	**Ramp Slope**
3593	**Perpendicular**	**S**	**Ramp Width**
3596	**Perpendicular**	**W**	**Ramp Slope**

14Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1160 14Th St and **Don Miguel St**			
3062	**Perpendicular**	**E**	**Ramp Slope**
3063	**Curb Ramp Required**	**NW**	**Access Route**
3061	**Perpendicular**	**S**	**Ramp Transition**
1379 14Th St and **S E St**			
3048	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3050	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3049	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3052	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
3051	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1St St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1030 1St St and **N E St**			
1057	**Perpendicular**	**E**	**Ramp Slope**
1056	**Perpendicular**	**N**	**Compliant Curb Ramp**
1055	**Curb Ramp Required**	**SW**	**Access Route**

2Nd St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1357 2Nd St and **N C St**			
3823	**Perpendicular**	**NE**	**Ramp Landing**
3826	**Perpendicular**	**NW**	**Ramp Landing**
3824	**Perpendicular**	**SE**	**Ramp Slope**
3825	**Perpendicular**	**SW**	**Ramp Slope**
1356 2Nd St and **N D St**			
3827	**Perpendicular**	**E**	**Ramp Slope**
3830	**Perpendicular**	**N**	**Ramp Slope**
3828	**Perpendicular**	**S**	**Gutter**
3829	**Perpendicular**	**W**	**Ramp Landing**
960 2Nd St and **N E St**			
1060	**Perpendicular**	**E**	**Ramp Slope**
1059	**Perpendicular**	**N**	**Gutter**
1058	**Driveway**	**SW**	**Pedestrian Access Route**

4Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1148 4Th St and Flume St			
4196	**Perpendicular**	**E**	**Ramp Landing**
4195	**Parallel**	**N**	**Ramp Cross Slope**
4198	**Perpendicular**	**S**	**Ramp Landing**
4197	**Perpendicular**	**W**	**Ramp Landing**
962 4Th St and N A St			
4209	**Perpendicular**	**E**	**Ramp Slope**
4206	**Perpendicular**	**N**	**Detectable Warning Surface**
4208	**Perpendicular**	**S**	**Ramp Slope**
4207	**Perpendicular**	**W**	**Detectable Warning Surface**
529 4Th St and N D St			
1070	**Perpendicular**	**E**	**Detectable Warning Surface**
1069	**Perpendicular**	**N**	**Ramp Landing**
1071	**Perpendicular**	**S**	**Ramp Slope**
1072	**Perpendicular**	**W**	**Detectable Warning Surface**
1266 4Th St and N E St			
1074	**Perpendicular**	**E**	**Ramp Landing**
1073	**Parallel**	**N**	**Ramp Cross Slope**
1075	**Parallel**	**S**	**Ramp Cross Slope**
1076	**Perpendicular**	**W**	**Ramp Slope**
884 4Th St and S Lake St			
4199	**Combination**	**E**	**Ramp Cross Slope**
4200	**Curb Ramp Required**	**N**	**Access Route**
4201	**Perpendicular**	**S**	**Compliant Curb Ramp**
4202	**Perpendicular**	**W**	**Ramp Slope**

5Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1352 5Th St and Flume St			
4218	**Combination**	**E**	**Ramp Slope**
4219	**Perpendicular**	**N**	**Detectable Warnings**
4217	**Combination**	**S**	**Ramp Cross Slope**
4220	**Combination**	**W**	**Ramp Slope**
1351 5Th St and High St			
4338	**Perpendicular**	**E**	**Ramp Slope**
4339	**Perpendicular**	**N**	**Ramp Landing**
4341	**Perpendicular**	**S**	**Ramp Landing**
4340	**Perpendicular**	**W**	**Ramp Landing**
1147 5Th St and Mace St			

3273	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3272	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1387 5Th St and **N B St**

4378	**Perpendicular**	**E**	**Ramp Slope**
4377	**Perpendicular**	**N**	**Ramp Landing**
4379	**Perpendicular**	**S**	**Ramp Landing**
4376	**Perpendicular**	**W**	**Ramp Landing**

279 5Th St and **N C St**

4380	**Under Construction**	**E**	**Existing Curb Ramp**
4381	**Under Construction**	**N**	**Existing Curb Ramp**
4382	**Under Construction**	**S**	**Existing Curb Ramp**
4383	**Under Construction**	**W**	**Existing Curb Ramp**

977 5Th St and **S Lake St**

4216	**Perpendicular**	**E**	**Ramp Slope**
4215	**Combination**	**N**	**Ramp Slope**
4214	**Perpendicular**	**S**	**Ramp Slope**
4213	**Perpendicular**	**W**	**Ramp Landing**

6Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1329 6Th St and **S B St**

4457	**Perpendicular**	**E**	**Ramp Slope**
4460	**Perpendicular**	**N**	**Ramp Slope**
4458	**Perpendicular**	**S**	**Ramp Slope**
4459	**Perpendicular**	**W**	**Ramp Slope**

356 6Th St and **S Lake St**

4365	**Combination**	**E**	**Ramp Cross Slope**
4364	**Combination**	**N**	**Ramp Landing**
4366	**Combination**	**S**	**Ramp Landing**
4367	**Combination**	**W**	**Ramp Cross Slope**

1410 6Th St and **Vineyard Ave**

4355	**Curb Ramp Required**	**E**	**Access Route**
4354	**Perpendicular**	**N**	**Ramp Slope**
4356	**Curb Ramp Required**	**S**	**Access Route**
4357	**Perpendicular**	**W**	**Ramp Slope**

7Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

903 7Th St and **S Lake St**

4451	**Perpendicular**	**E**	**Ramp Landing**
4449	**Perpendicular**	**N**	**Ramp Landing**
4452	**Perpendicular**	**S**	**Ramp Landing**

4450	**Curb Ramp Required**	**W**	**Access Route**

9Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1370 9Th St and **S E St**			
4248	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4245	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4246	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
4247	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
652 9Th St and **S Lake St**			
4299	**Parallel**	**E**	**Access Route**
4300	**Perpendicular**	**N**	**Ramp Landing**
4301	**Curb Ramp Required**	**SW**	**Access Route**

A St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
223 A St and **Kenney Ct**			
3408	**Perpendicular**	**NE**	**Ramp Slope**
3409	**Perpendicular**	**NW**	**Ramp Landing**
3410	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
798 A St and **Knox Ave**			
3414	**Parallel**	**NE**	**Ramp Landing**
3416	**Parallel**	**NW**	**Ramp Cross Slope**
3415	**Curb Ramp Required**	**SE**	**Access Route**
1441 A St and **Lake St**			
3424	**Parallel**	**NE**	**Ramp Cross Slope**
3427	**Perpendicular**	**NW**	**Ramp Slope**
3425	**Parallel**	**SE**	**Ramp Cross Slope**
3426	**Parallel**	**SW**	**Ramp Cross Slope**
1584 A St and **Rd 28**			
3405	**Perpendicular**	**NW**	**Detectable Warning Surface**
3407	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3406	**Perpendicular**	**SW**	**Gutter**
799 A St and **Stinson Ave**			
3417	**Parallel**	**NE**	**Ramp Landing**
3419	**Parallel**	**NW**	**Ramp Cross Slope**
3418	**Curb Ramp Required**	**SE**	**Access Route**

Adams Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
789 Adams Ave and **E Ellis St**			

1951	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1952	**Perpendicular**	**SE**	**Ramp Landing**
1953	**Perpendicular**	**SW**	**Gutter**

85 Adams Ave and **E Kennedy St**

1982	**Perpendicular**	**NE**	**Ramp Slope**
1983	**Perpendicular**	**NW**	**Ramp Slope**
1981	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

788 Adams Ave and **Eisenhower Ln**

2032	**Perpendicular**	**NE**	**Ramp Slope**
2033	**Perpendicular**	**NW**	**Ramp Slope**
2031	**Curb Ramp Required**	**S**	**Access Route**

84 Adams Ave and **Tyler Ln**

1987	**Curb Ramp Required**	**N**	**Access Route**
1988	**Perpendicular**	**SE**	**Gutter**
1989	**Perpendicular**	**SW**	**Ramp Landing**

Adanac Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

259 Adanac Way and **Adanac Ct**

1998	**Curb Ramp Required**	**N**	**Access Route**
1999	**Perpendicular**	**SE**	**Gutter**
2000	**Perpendicular**	**SW**	**Ramp Landing**

258 Adanac Way and **Dominguez Dr**

2017	**Perpendicular**	**NE**	**Ramp Slope**
2018	**Perpendicular**	**NW**	**Ramp Slope**
2016	**Curb Ramp Required**	**S**	**Access Route**

261 Adanac Way and **Jericho Dr**

2007	**Perpendicular**	**NE**	**Ramp Slope**
2006	**Perpendicular**	**NW**	**Ramp Flare**
2004	**Perpendicular**	**SE**	**Gutter**
2005	**Perpendicular**	**SW**	**Gutter**

260 Adanac Way and **Jesse Dr**

2094	**Perpendicular**	**NE**	**Ramp Transition**
2095	**Perpendicular**	**NW**	**Detectable Warnings**
2097	**Perpendicular**	**SE**	**Ramp Slope**
2096	**Perpendicular**	**SW**	**Ramp Slope**

257 Adanac Way and **Madison Dr**

1995	**Curb Ramp Required**	**E**	**Access Route**
1997	**Perpendicular**	**NW**	**Ramp Slope**
1996	**Perpendicular**	**SW**	**Ramp Landing**

Adelaide Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
434 Adelaide Ave and Canal St			
4315	**Perpendicular**	**E**	**Ramp Landing**
4313	**Curb Ramp Required**	**N**	**Access Route**
4314	**Perpendicular**	**S**	**Ramp Landing**
1011 Adelaide Ave and Sawmill St			
3370	**Perpendicular**	**E**	**Ramp Transition**
3372	**Perpendicular**	**N**	**Ramp Slope**
3371	**Curb Ramp Required**	**S**	**Access Route**

Adell St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
364 Adell St and Austin Ave			
3949	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3948	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3950	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3951	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
363 Adell St and Country Club Dr			
3876	**Curb Ramp Required**	**N**	**Access Route**
3877	**Parallel**	**SE**	**Gutter**
3878	**Parallel**	**SW**	**Ramp Landing**
367 Adell St and N D St			
3945	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3946	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3944	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3947	**Perpendicular**	**SW**	**Ramp Landing**
365 Adell St and Sonora St			
3893	**Parallel**	**N**	**Gutter**
3892	**Perpendicular**	**SE**	**Ramp Slope**
3894	**Perpendicular**	**SW**	**Ramp Landing**

Airport Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
821 Airport Dr and Aviation Dr			
3807	**Perpendicular**	**E**	**Ramp Slope**
3806	**Driveway**	**NW**	**Pedestrian Access Route**
3808	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
822 Airport Dr and Yeager Rd			
3786	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**

3788	**Perpendicular**	**SE**	**Ramp Landing**
3787	**Curb Ramp Required**	**W**	**Access Route**

Alderwood Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
968 Alderwood Ct and N Schnoor Ave			
2436	**Perpendicular**	**NW**	**Ramp Slope**
2437	**Perpendicular**	**SW**	**Ramp Slope**

Almond Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1447 Almond Ave and Commerce Dr			
1910	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1911	**Curb Ramp Required**	**NW**	**Access Route**
1912	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1913	**Perpendicular**	**SW**	**Ramp Slope**
37 Almond Ave and Emily Way			
2886	**Perpendicular**	**NE**	**Gutter**
2885	**Perpendicular**	**NW**	**Gutter**
2883	**Perpendicular**	**SE**	**Ramp Slope**
2884	**Perpendicular**	**SW**	**Ramp Landing**
36 Almond Ave and Gateway Dr			
2928	**Perpendicular**	**NE**	**Ramp Slope**
2929	**Perpendicular**	**NW**	**Ramp Slope**
2926	**Perpendicular**	**SE**	**Ramp Transition**
2927	**Perpendicular**	**SW**	**Gutter**
1421 Almond Ave and Oakridge Dr			
334	**Perpendicular**	**NE**	**Ramp Landing**
335	**Perpendicular**	**NW**	**Ramp Landing**
337	**Perpendicular**	**SE**	**Ramp Slope**
336	**Perpendicular**	**SW**	**Ramp Slope**
999 Almond Ave and Pine St			
2772	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2773	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2774	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
651 Almond Ave and Rubicon Ave			
2795	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2793	**Perpendicular**	**SE**	**Gutter**
2794	**Perpendicular**	**SW**	**Gutter**
1169 Almond Ave and Santa Bonita St			
332	**Perpendicular**	**NE**	**Ramp Slope**
333	**Perpendicular**	**NW**	**Ramp Slope**

331	**Curb Ramp Required**	**S**	**Access Route**

966 Almond Ave and **Schnoor Ave**

1916	**Perpendicular**	**NE**	**Gutter**
1914	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1915	**Curb Ramp Required**	**S**	**Access Route**

643 Almond Ave and **Stadium Rd**

403	**Perpendicular**	**NE**	**Gutter**
400	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
402	**Perpendicular**	**SE**	**Ramp Slope**
401	**Perpendicular**	**SW**	**Gutter**

Amerine Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

709 Amerine Ave and **Fifth St**

533	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
530	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
532	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
531	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1262 Amerine Ave and **Fourth St**

536	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
537	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
535	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
534	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1362 Amerine Ave and **Jennings St**

539	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
540	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
538	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
541	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1111 Amerine Ave and **Third St**

542	**Perpendicular**	**NW**	**Ramp Flare**
544	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
543	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Amy Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

176 Amy Ave and **Kathryn Ave**

2081	**Curb Ramp Required**	**N**	**Access Route**
2082	**Perpendicular**	**SE**	**Gutter**
2083	**Perpendicular**	**SW**	**Gutter**

Angel Falls Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
571 Angel Falls Ct and Capistrano Dr			
2601	**Perpendicular**	**NE**	**Ramp Width**
2602	**Perpendicular**	**NW**	**Ramp Slope**
2603	**Curb Ramp Required**	**SW**	**Access Route**

Anna Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
675 Anna Ave and Carmen Ave			
2075	**Curb Ramp Required**	**N**	**Access Route**
2077	**Perpendicular**	**SE**	**Ramp Landing**
2076	**Perpendicular**	**SW**	**Ramp Landing**

Apple Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
555 Apple Tree Dr and Toschi Dr			
2687	**Perpendicular**	**NE**	**Ramp Slope**
2686	**Perpendicular**	**NW**	**Ramp Slope**
2688	**Perpendicular**	**SE**	**Ramp Slope**
2685	**Perpendicular**	**SW**	**Ramp Slope**

Aram Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1012 Aram Ave and Joy St			
878	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
877	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
879	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1013 Aram Ave and W Central Ave			
876	**Curb Ramp Required**	**E**	**Access Route**
874	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
875	**Curb Ramp Required**	**SW**	**Access Route**

Arbella Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1058 Arbella Ln and Frederick Way			
2503	**Perpendicular**	**NW**	**Ramp Slope**
2505	**Curb Ramp Required**	**SE**	**Access Route**

2504	**Perpendicular**	**SW**	**Ramp Slope**

Ardilla Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1582 Ardilla Dr and **Bridge Way**			
3395	**Curb Ramp Required**	**NE**	**Access Route**
3385	**Perpendicular**	**NW**	**Gutter**
3386	**Curb Ramp Required**	**SW**	**Access Route**
189 Ardilla Dr and **Knox St**			
3092	**Perpendicular**	**NE**	**Ramp Landing**
3093	**Perpendicular**	**NW**	**Ramp Slope**
3091	**Perpendicular**	**SE**	**Ramp Slope**
3090	**Perpendicular**	**SW**	**Ramp Slope**
187 Ardilla Dr and **Mariposa St**			
3378	**Curb Ramp Required**	**NE**	**Access Route**
3377	**Perpendicular**	**SE**	**Gutter**
3376	**Perpendicular**	**SW**	**Gutter**
186 Ardilla Dr and **Monarch Rd**			
3383	**Perpendicular**	**NE**	**Ramp Transition**
3382	**Perpendicular**	**NW**	**Ramp Transition**
3384	**Curb Ramp Required**	**SE**	**Access Route**

Aries Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1482 Aries Ct and **Glenville Ave**			
2324	**Curb Ramp Required**	**NE**	**Access Route**
2322	**Perpendicular**	**NW**	**Gutter**
2323	**Perpendicular**	**SW**	**Ramp Slope**

Ashbury Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
665 Ashbury Ct and **Glenville Ave**			
2313	**Curb Ramp Required**	**NE**	**Access Route**
2314	**Perpendicular**	**SE**	**Gutter**
2315	**Perpendicular**	**SW**	**Ramp Slope**

Ashlan Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
854 Ashlan Way and **Austin Ave**			
3956	**Perpendicular**	**NE**	**Ramp Landing**

3957	**Perpendicular**	**SE**	**Ramp Landing**
3955	**Curb Ramp Required**	**W**	**Access Route**

172 Ashlan Way and **Fresno St**

2238	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2235	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2237	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2236	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1108 Ashlan Way and **Lucia Way**

3909	**Curb Ramp Required**	**N**	**Access Route**
3908	**Perpendicular**	**SE**	**Ramp Slope**
3910	**Perpendicular**	**SW**	**Ramp Slope**

404 Ashlan Way and **N D St**

3980	**Curb Ramp Required**	**E**	**Access Route**
3990	**Perpendicular**	**NE**	**Ramp Landing**
3981	**Perpendicular**	**NW**	**Ramp Flare**
3988	**Perpendicular**	**SE**	**Ramp Landing**
3979	**Perpendicular**	**SW**	**Ramp Slope**
3989	**Curb Ramp Required**	**W**	**Access Route**

1123 Ashlan Way and **Noreen Way**

3982	**Perpendicular**	**NE**	**Gutter**
3984	**Perpendicular**	**SE**	**Ramp Slope**
3983	**Curb Ramp Required**	**W**	**Access Route**

990 Ashlan Way and **Popoli Way**

3907	**Perpendicular**	**NE**	**Ramp Slope**
3905	**Perpendicular**	**NW**	**Ramp Slope**
3906	**Curb Ramp Required**	**S**	**Access Route**

171 Ashlan Way and **Rogers St**

2239	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
2241	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2240	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Aspen Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1538 Aspen Ln and

2463	**Perpendicular**	**NE**	**Ramp Slope**
2462	**Perpendicular**	**SE**	**Ramp Slope**
2461	**Curb Ramp Required**	**SW**	**Access Route**

1450 Aspen Ln and **Beechwood Way**

2467	**Perpendicular**	**NE**	**Ramp Landing**
2466	**Perpendicular**	**NW**	**Ramp Slope**
2464	**Perpendicular**	**SE**	**Ramp Slope**
2465	**Perpendicular**	**SW**	**Ramp Slope**

1204 Aspen Ln and **Foxglove Way**

2424	**Driveway**	**NE**	**Pedestrian Access Route**
2423	**Perpendicular**	**SE**	**Ramp Slope**
2422	**Perpendicular**	**SW**	**Ramp Slope**

1331 Aspen Ln and **Grapewood Way**

2470	**Perpendicular**	**NE**	**Ramp Slope**
2471	**Perpendicular**	**NW**	**Ramp Slope**
2469	**Perpendicular**	**SE**	**Ramp Slope**
2468	**Perpendicular**	**SW**	**Ramp Slope**

783 Aspen Ln and **Meadowrest Way**

2460	**Perpendicular**	**NW**	**Ramp Slope**
2458	**Curb Ramp Required**	**SE**	**Access Route**
2459	**Perpendicular**	**SW**	**Ramp Slope**

870 Aspen Ln and **Plumwood Way**

2474	**Curb Ramp Required**	**NE**	**Access Route**
2473	**Perpendicular**	**NW**	**Ramp Slope**
2472	**Perpendicular**	**SW**	**Ramp Slope**

69 Aspen Ln and **W Cleveland Ave**

2455	**Perpendicular**	**NE**	**Ramp Slope**
2456	**Parallel**	**NW**	**Ramp Cross Slope**
2457	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Asti Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

598 Asti Way and **N D St**

3995	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3994	**Perpendicular**	**NW**	**Ramp Landing**
3996	**Perpendicular**	**SW**	**Ramp Slope**

Austin Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1115 Austin Ave and **Ashlan Way**

3958	**Curb Ramp Required**	**E**	**Access Route**
3959	**Perpendicular**	**NW**	**Ramp Landing**
3960	**Perpendicular**	**SW**	**Ramp Landing**

1064 Austin Ave and **E Clark St**

3952	**Curb Ramp Required**	**E**	**Access Route**
3953	**Perpendicular**	**NW**	**Ramp Slope**
3954	**Perpendicular**	**SW**	**Ramp Landing**

456 Austin Ave and **E Cleveland Ave**

4156	**Parallel**	**NE**	**Ramp Slope**
4155	**Parallel**	**NW**	**Ramp Landing**
4157	**Perpendicular**	**SE**	**Ramp Landing**

4158	**Parallel**	**SW**	**Ramp Cross Slope**

1227 Austin Ave and **E Lincoln Ave**

1276	**Perpendicular**	**NE**	**Ramp Flare**
1277	**Perpendicular**	**NW**	**Ramp Slope**
1279	**Perpendicular**	**SE**	**Ramp Landing**
1278	**Perpendicular**	**SW**	**Ramp Slope**

1214 Austin Ave and **Green Way**

1373	**Perpendicular**	**NE**	**Ramp Landing**
1372	**Perpendicular**	**SE**	**Ramp Landing**
1371	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1134 Austin Ave and **W Sherwood Way**

1375	**Perpendicular**	**NE**	**Ramp Slope**
1376	**Perpendicular**	**NW**	**Gutter**
1374	**Perpendicular**	**SE**	**Ramp Slope**
1377	**Perpendicular**	**SW**	**Ramp Slope**

921 Austin Ave and **W South St**

1280	**Parallel**	**NE**	**Gutter**
1281	**Perpendicular**	**NW**	**Ramp Slope**
1283	**Perpendicular**	**SE**	**Ramp Landing**
1282	**Perpendicular**	**SW**	**Ramp Slope**

985 Austin Ave and **Wessmith Way**

3967	**Perpendicular**	**NE**	**Ramp Landing**
3969	**Perpendicular**	**SE**	**Ramp Landing**
3968	**Curb Ramp Required**	**W**	**Access Route**

Autumn Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1246 Autumn Rd and **National Ave**

1634	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1636	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1635	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1035 Autumn Rd and **Summer St**

1745	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1746	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1747	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1245 Autumn Rd and **Sunnydale St**

1633	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1631	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1632	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1034 Autumn Rd and **Winter Way**

1748	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1749	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1750	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Avalon Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1086 Avalon Ave and Kelsey Ln			
1554	**Curb Ramp Required**	**E**	**Access Route**
1559	**Perpendicular**	**NE**	**Ramp Slope**
1556	**Perpendicular**	**NW**	**Ramp Slope**
1558	**Perpendicular**	**SE**	**Ramp Landing**
1555	**Perpendicular**	**SW**	**Ramp Landing**
1557	**Curb Ramp Required**	**W**	**Access Route**

Ave 13

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1455 Ave 13 and Granada Dr			
2566	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2565	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2563	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2564	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Ave 13 1/2

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1057 Ave 13 1/2 and Westberry Bvd			
2573	**Perpendicular**	**NE**	**Ramp Slope**
2575	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2574	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Ave 14 1/2

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1181 Ave 14 1/2 and Sunset Ave			
1382	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1383	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Ave 17

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
107 Ave 17 and			
3784	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3783	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3785	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1314 Ave 17 and Airport Dr			

3779	**Curb Ramp Required**	**NE**	**Access Route**
3778	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3776	**Perpendicular**	**SE**	**Ramp Slope**
3777	**Perpendicular**	**SW**	**Ramp Landing**

Aviation Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
214 Aviation Dr and **Condor Rd**			
3797	**Driveway**	**N**	**Pedestrian Access Route**
3798	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
925 Aviation Dr and **Falcon Dr**			
3794	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3796	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3795	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Avila Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
405 Avila Way and **Fig Ave**			
3195	**Perpendicular**	**E**	**Gutter**
3193	**Parallel**	**N**	**Ramp Slope**
3194	**Curb Ramp Required**	**W**	**Access Route**

Awahnee Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
102 Awahnee Ct and **Monterey St**			
345	**Curb Ramp Required**	**E**	**Access Route**
347	**Perpendicular**	**NW**	**Ramp Slope**
346	**Perpendicular**	**SW**	**Gutter**

Azure Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
396 Azure Dr and **Ivory Ct**			
4433	**Perpendicular**	**NE**	**Ramp Landing**
4432	**Perpendicular**	**SE**	**Ramp Landing**
4431	**Curb Ramp Required**	**W**	**Access Route**

Barcelona Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
464 Barcelona Way and **Wessmith Way**			

2151	**Curb Ramp Required**	**E**	**Access Route**
2153	**Perpendicular**	**NW**	**Ramp Slope**
2152	**Perpendicular**	**SW**	**Ramp Landing**

Baron St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1236 Baron St and **Liberty Ln**			
1388	**Perpendicular**	**NE**	**Ramp Width**
1389	**Perpendicular**	**NW**	**Ramp Slope**
1387	**Curb Ramp Required**	**S**	**Access Route**

Barsotti Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1163 Barsotti Ave and **N Park Dr**			
930	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
931	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
932	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1162 Barsotti Ave and **Ula St**			
933	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
934	**Curb Ramp Required**	**NW**	**Access Route**
935	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Bay Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
362 Bay Ct and **Mainberry Dr**			
639	**Perpendicular**	**NE**	**Ramp Landing**
641	**Perpendicular**	**SE**	**Ramp Landing**
640	**Curb Ramp Required**	**W**	**Access Route**

Bay View Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
230 Bay View Dr and **Harbor Dr**			
676	**Curb Ramp Required**	**E**	**Access Route**
675	**Perpendicular**	**W**	**Ramp Landing**
229 Bay View Dr and **Mainberry Dr**			
653	**Perpendicular**	**NE**	**Ramp Landing**
655	**Perpendicular**	**NW**	**Ramp Landing**
652	**Perpendicular**	**SE**	**Ramp Landing**
654	**Perpendicular**	**SW**	**Ramp Width**

Baylor Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1109 Baylor Ct and Jefferson Ave			
868	**Perpendicular**	**NE**	**Ramp Landing**
870	**Perpendicular**	**NW**	**Ramp Landing**
869	**Curb Ramp Required**	**S**	**Access Route**

Bent Oak Tr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
210 Bent Oak Tr and Crown Terrace			
2777	**Perpendicular**	**NE**	**Detectable Warning Surface**
2778	**Perpendicular**	**SE**	**Detectable Warning Surface**
2779	**Curb Ramp Required**	**SW**	**Access Route**
1544 Bent Oak Tr and Ivy Glen Dr			
2780	**Perpendicular**	**NW**	**Gutter**
2781	**Curb Ramp Required**	**SE**	**Access Route**
1543 Bent Oak Tr and Orchard Hill Dr			
2776	**Curb Ramp Required**	**NE**	**Access Route**
2775	**Perpendicular**	**SW**	**Gutter**

Bernardi Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1549 Bernardi Ave and Munra Ave			
2830	**Perpendicular**	**NW**	**Ramp Width**
2831	**Curb Ramp Required**	**SE**	**Access Route**
161 Bernardi Ave and Stadium Rd			
2832	**Perpendicular**	**NE**	**Ramp Slope**
2833	**Perpendicular**	**SE**	**Ramp Slope**
2834	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Berry Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
88 Berry Dr and Apple Tree Dr			
2668	**Perpendicular**	**NE**	**Ramp Slope**
2669	**Perpendicular**	**SE**	**Ramp Width**
2670	**Curb Ramp Required**	**SW**	**Access Route**
1535 Berry Dr and Cherry Tree Dr			
2674	**Perpendicular**	**NE**	**Ramp Slope**

2675	**Curb Ramp Required**	**SW**	**Access Route**

894 Berry Dr and **Howard Rd**

1772	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

86 Berry Dr and **Orange Tree Dr**

2671	**Perpendicular**	**NE**	**Ramp Slope**
2672	**Perpendicular**	**SE**	**Ramp Slope**
2673	**Curb Ramp Required**	**SW**	**Access Route**

89 Berry Dr and **Peanut Dr**

2665	**Perpendicular**	**NE**	**Ramp Slope**
2666	**Perpendicular**	**SE**	**Ramp Slope**
2667	**Curb Ramp Required**	**SW**	**Access Route**

956 Berry Dr and **Summer St**

1767	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1766	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1765	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

265 Berry Dr and **Westgate Dr**

1738	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1736	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1737	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1171 Berry Dr and **Winter Way**

1762	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1763	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1764	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Berry Drive

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

594 Berry Drive and **Plumas Street**

1882	**Curb Ramp Required**	**N**	**Access Route**
1883	**Perpendicular**	**SE**	**Ramp Slope**
1884	**Perpendicular**	**SW**	**Ramp Slope**

Bilbao Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

310 Bilbao Ct and **San Sebastian Way**

2179	**Perpendicular**	**NE**	**Ramp Landing**
2180	**Perpendicular**	**SE**	**Gutter**
2178	**Curb Ramp Required**	**W**	**Access Route**

Bloker St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

451 Bloker St and **E Cleveland Ave**

4162	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4164	**Parallel**	**SE**	**Ramp Slope**
4163	**Parallel**	**SW**	**Ramp Landing**

1170 Bloker St and **E Lincoln Ave**

1263	**Perpendicular**	**NE**	**Ramp Landing**
1262	**Perpendicular**	**NW**	**Compliant Curb Ramp**
1264	**Perpendicular**	**SE**	**Ramp Slope**
1265	**Perpendicular**	**SW**	**Ramp Slope**

1430 Bloker St and **Rush St**

1260	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1259	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1261	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1258	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Blueberry Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

196 Blueberry Ln and **E Almond Ave**

3536	**Perpendicular**	**NE**	**Ramp Slope**
3538	**Perpendicular**	**NW**	**Ramp Landing**
3537	**Curb Ramp Required**	**SE**	**Access Route**

197 Blueberry Ln and **Madarin St**

3534	**Curb Ramp Required**	**NE**	**Access Route**
3533	**Perpendicular**	**SE**	**Gutter**
3535	**Perpendicular**	**SW**	**Ramp Width**

Blueridge Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1513 Blueridge Dr and

411	**Perpendicular**	**SE**	**Ramp Landing**

1032 Blueridge Dr and **Deerwood Dr**

409	**Perpendicular**	**NE**	**Ramp Slope**
410	**Perpendicular**	**NW**	**Ramp Slope**
408	**Curb Ramp Required**	**S**	**Access Route**

1031 Blueridge Dr and **Santa Bonita St**

323	**Curb Ramp Required**	**E**	**Access Route**
324	**Perpendicular**	**NW**	**Ramp Flare**
325	**Perpendicular**	**SW**	**Ramp Landing**

Bo Tree Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

648 Bo Tree Ln and **Majestic Way**

2919	**Curb Ramp Required**	**NE**	**Access Route**
2918	**Perpendicular**	**SE**	**Gutter**
2917	**Perpendicular**	**SW**	**Ramp Slope**

Boles St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1222 Boles St and **Second St**

3811	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3810	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3809	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Bolinas Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

631 Bolinas Way and **Orchard Hill Dr**

2800	**Curb Ramp Required**	**NE**	**Access Route**
2799	**Perpendicular**	**SE**	**Ramp Transition**
2798	**Perpendicular**	**SW**	**Ramp Transition**

Boulder Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1068 Boulder Ave and **Boulder Pl**

1494	**Curb Ramp Required**	**N**	**Access Route**
1496	**Perpendicular**	**SE**	**Ramp Landing**
1495	**Perpendicular**	**SW**	**Ramp Slope**

Bridge Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1583 Bridge Way and **Dome Ave**

3394	**Perpendicular**	**SW**	**Gutter**

Briquel Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

667 Briquel Ave and **Carmen Ave**

2073	**Perpendicular**	**NE**	**Ramp Landing**
2074	**Perpendicular**	**NW**	**Ramp Landing**
2072	**Curb Ramp Required**	**S**	**Access Route**

Bruce St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1097 Bruce St and Foster Ave			
925	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
926	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
924	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Caitlan Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
243 Caitlan Dr and Buena Ventura Ct			
1414	**Perpendicular**	**NE**	**Ramp Landing**
1416	**Perpendicular**	**SE**	**Ramp Landing**
1415	**Curb Ramp Required**	**W**	**Access Route**
242 Caitlan Dr and Fiesta Dr			
1411	**Curb Ramp Required**	**E**	**Access Route**
1412	**Perpendicular**	**NW**	**Ramp Landing**
1413	**Perpendicular**	**SE**	**Ramp Landing**
244 Caitlan Dr and Isla Vista Ct			
1417	**Perpendicular**	**NE**	**Ramp Landing**
1418	**Perpendicular**	**NW**	**Ramp Landing**
1420	**Perpendicular**	**SE**	**Ramp Landing**
1419	**Perpendicular**	**SW**	**Ramp Landing**
240 Caitlan Dr and Los Osos Ct			
1408	**Perpendicular**	**NE**	**Ramp Landing**
1410	**Perpendicular**	**SE**	**Ramp Landing**
1409	**Curb Ramp Required**	**W**	**Access Route**
241 Caitlan Dr and Riverview Dr			
1406	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1405	**Perpendicular**	**SE**	**Ramp Landing**
1407	**Perpendicular**	**SW**	**Ramp Landing**

Caitlan Drive

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1479 Caitlan Drive and Via Capitola			
1425	**Perpendicular**	**NE**	**Ramp Landing**
1426	**Perpendicular**	**SE**	**Ramp Landing**
1424	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
1480 Caitlan Drive and Via De Oro			
1422	**Perpendicular**	**NE**	**Ramp Landing**
1423	**Perpendicular**	**SE**	**Ramp Landing**

1421	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

California Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
800 California Ave and N Park Dr			
951	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
950	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
952	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
949	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1122 California Ave and N Pine St			
903	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
901	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
902	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
931 California Ave and Redwood Dr			
947	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
948	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
946	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Calimyrna Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
190 Calimyrna Ave and E Cleveland Ave			
4059	**Parallel**	**NE**	**Ramp Cross Slope**
4060	**Parallel**	**NW**	**Ramp Cross Slope**
4058	**Curb Ramp Required**	**S**	**Access Route**
191 Calimyrna Ave and Mission Ave			
2212	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2214	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2213	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Cambria Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
809 Cambria Ave and Zak Way			
1550	**Perpendicular**	**NE**	**Ramp Landing**
1549	**Perpendicular**	**NW**	**Ramp Slope**
1548	**Curb Ramp Required**	**S**	**Access Route**

Canal St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1311 Canal St and Lilly St			
3251	**Perpendicular**	**E**	**Ramp Slope**

3250	**Parallel**	**N**	**Ramp Landing**
3252	**Perpendicular**	**S**	**Gutter**
3253	**Perpendicular**	**W**	**Gutter**

1256 Canal St and **Vineyard Ave**

4312	**Perpendicular**	**E**	**Ramp Landing**
4311	**Perpendicular**	**N**	**Ramp Landing**
4309	**Perpendicular**	**S**	**Ramp Slope**
4310	**Perpendicular**	**W**	**Ramp Landing**

Capistrano Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

649 Capistrano Dr and **S Timberline Dr**

2604	**Perpendicular**	**NE**	**Detectable Warning Surface**
2605	**Perpendicular**	**SE**	**Detectable Warning Surface**
2606	**Curb Ramp Required**	**SW**	**Access Route**

Carmel St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1576 Carmel St and **Fritz St**

3160	**Curb Ramp Required**	**NW**	**Access Route**
3159	**Perpendicular**	**SW**	**Ramp Slope**

Carmen Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

692 Carmen Ave and **Merced St**

2113	**Perpendicular**	**NE**	**Ramp Landing**
2112	**Perpendicular**	**SE**	**Ramp Landing**
2111	**Curb Ramp Required**	**W**	**Access Route**

Cedar Creek Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1159 Cedar Creek Ln and **Sultana Dr**

1539	**Perpendicular**	**NE**	**Ramp Landing**
1538	**Perpendicular**	**NW**	**Ramp Landing**
1540	**Curb Ramp Required**	**S**	**Access Route**

Central Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1183 Central Ave and **2Nd St**

3848	**Curb Ramp Required**	**N**	**Access Route**
3847	**Perpendicular**	**SE**	**Ramp Flare**
3849	**Perpendicular**	**SW**	**Ramp Landing**

422 Central Ave and N A St

3840	**Perpendicular**	**NE**	**Ramp Landing**
3839	**Parallel**	**NW**	**Ramp Landing**
3837	**Perpendicular**	**SE**	**Compliant Curb Ramp**
3838	**Perpendicular**	**SSE**	**Compliant Curb Ramp**
3841	**Perpendicular**	**SSW**	**Compliant Curb Ramp**
3842	**Perpendicular**	**SW**	**Ramp Slope**

1444 Central Ave and N B St

3844	**Under Construction**	**NE**	**Existing Curb Ramp**
3845	**Under Construction**	**NW**	**Existing Curb Ramp**
3843	**Perpendicular**	**SE**	**Compliant Curb Ramp**
3846	**Parallel**	**SW**	**Ramp Landing**

1426 Central Ave and N C St

3821	**Under Construction**	**NE**	**Existing Curb Ramp**
3820	**Parallel**	**NW**	**Gutter**
3822	**Perpendicular**	**SE**	**Ramp Slope**
3819	**Perpendicular**	**SW**	**Ramp Landing**

817 Central Ave and N D St

3818	**Under Construction**	**NE**	**Existing Curb Ramp**
3815	**Under Construction**	**NW**	**Existing Curb Ramp**
3817	**Perpendicular**	**SE**	**Compliant Curb Ramp**
3816	**Perpendicular**	**SW**	**Gutter**

796 Central Ave and N E St

1054	**Perpendicular**	**E**	**Compliant Curb Ramp**
1052	**Curb Ramp Required**	**N**	**Access Route**
1053	**Perpendicular**	**S**	**Gutter**

1304 Central Ave and N Gateway Dr

1051	**Perpendicular**	**E**	**Ramp Slope**
1050	**Perpendicular**	**N**	**Gutter**
1048	**Perpendicular**	**S**	**Ramp Slope**
1049	**Perpendicular**	**W**	**Ramp Flare**

1136 Central Ave and N Lake St

4205	**Perpendicular**	**S**	**Ramp Landing**
4204	**Curb Ramp Required**	**W**	**Access Route**

Central Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

743 Central Ct and W Central Ave

872	**Curb Ramp Required**	**NE**	**Access Route**
871	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**

873	**Curb Ramp Required**	**S**	**Access Route**

Central Pl

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1094 Central Pl and **Orchard Ave**			
824	**Curb Ramp Required**	**N**	**Access Route**
825	**Perpendicular**	**SE**	**Ramp Landing**
826	**Perpendicular**	**SW**	**Ramp Landing**
1093 Central Pl and **W Central Ave**			
834	**Perpendicular**	**NE**	**Ramp Landing**
835	**Perpendicular**	**SE**	**Ramp Landing**
833	**Curb Ramp Required**	**W**	**Access Route**

Chatom Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
104 Chatom Way and **Gary Ln**			
233	**Perpendicular**	**NE**	**Detectable Warning Surface**
232	**Perpendicular**	**NW**	**Ramp Landing**
234	**Perpendicular**	**SE**	**Detectable Warning Surface**
231	**Perpendicular**	**SW**	**Gutter**
103 Chatom Way and **Triviso Ave**			
237	**Perpendicular**	**NE**	**Gutter**
236	**Perpendicular**	**NW**	**Gutter**
235	**Curb Ramp Required**	**S**	**Access Route**

Cherry St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1592 Cherry St and **Peach St**			
3498	**Curb Ramp Required**	**NW**	**Access Route**
3497	**Parallel**	**SE**	**Ramp Landing**

Cherry Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1477 Cherry Tree Dr and			
2681	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2680	**Perpendicular**	**NW**	**Ramp Landing**
2679	**Perpendicular**	**SW**	**Gutter**

Chestnut Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1559 Chestnut Ave and			
2964	**Perpendicular**	**NE**	**Gutter**
2965	**Curb Ramp Required**	**SW**	**Access Route**
723 Chestnut Ave and **Acorn Ct**			
2967	**Curb Ramp Required**	**NW**	**Access Route**
2968	**Perpendicular**	**SE**	**Ramp Transition**
2966	**Perpendicular**	**SW**	**Ramp Transition**
724 Chestnut Ave and **Cashew Ct**			
2970	**Curb Ramp Required**	**NW**	**Access Route**
2971	**Perpendicular**	**SE**	**Ramp Slope**
2969	**Perpendicular**	**SW**	**Ramp Slope**
1062 Chestnut Ave and **Watt St**			
2930	**Curb Ramp Required**	**NW**	**Access Route**
2932	**Perpendicular**	**SE**	**Ramp Landing**
2931	**Perpendicular**	**SW**	**Ramp Slope**

Chianti Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
467 Chianti Ave and **S Double Tree Way**			
2618	**Curb Ramp Required**	**NW**	**Access Route**
2616	**Perpendicular**	**SE**	**Ramp Slope**
2617	**Perpendicular**	**SW**	**Ramp Width**
1531 Chianti Ave and **S Timberline Dr**			
2619	**Perpendicular**	**NE**	**Ramp Slope**
2620	**Curb Ramp Required**	**NW**	**Access Route**
1530 Chianti Ave and **S Wolftrap St**			
2615	**Curb Ramp Required**	**NE**	**Access Route**
2614	**Perpendicular**	**NW**	**Ramp Slope**

Chianti Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1187 Chianti Ct and **Santa Bonita St**			
329	**Perpendicular**	**NE**	**Ramp Landing**
330	**Perpendicular**	**SE**	**Ramp Slope**
328	**Curb Ramp Required**	**W**	**Access Route**

Claremont Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
952 Claremont Dr and University Ave			
745	**Curb Ramp Required**	**N**	**Access Route**
744	**Perpendicular**	**SE**	**Ramp Landing**
746	**Perpendicular**	**SW**	**Ramp Landing**

Clemmensen Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
911 Clemmensen Ave and Madera Ave			
3568	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3567	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3569	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Clinton St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1124 Clinton St and Elm Ave			
3205	**Perpendicular**	**E**	**Ramp Flare**
3204	**Perpendicular**	**N**	**Ramp Slope**
3202	**Perpendicular**	**S**	**Ramp Slope**
3203	**Parallel**	**W**	**Ramp Slope**
1125 Clinton St and Fig Ave			
3191	**Perpendicular**	**E**	**Ramp Transition**
3192	**Parallel**	**N**	**Ramp Slope**
3190	**Perpendicular**	**S**	**Ramp Landing**
3189	**Parallel**	**W**	**Ramp Cross Slope**
922 Clinton St and Magnolia St			
3226	**Curb Ramp Required**	**E**	**Access Route**
3228	**Parallel**	**N**	**Ramp Landing**
3225	**Parallel**	**S**	**Ramp Landing**
3227	**Parallel**	**W**	**Ramp Landing**
808 Clinton St and Malone St			
3249	**Perpendicular**	**N**	**Ramp Transition**
3247	**Curb Ramp Required**	**S**	**Access Route**
3248	**Perpendicular**	**W**	**Ramp Landing**
818 Clinton St and Millview Dr			
3222	**Perpendicular**	**E**	**Ramp Slope**
3223	**Curb Ramp Required**	**N**	**Access Route**
3224	**Perpendicular**	**S**	**Ramp Transition**
1436 Clinton St and S B St			

4323	**Perpendicular**	**E**	**Ramp Landing**
4325	**Perpendicular**	**N**	**Ramp Landing**
4324	**Perpendicular**	**S**	**Ramp Landing**
4326	**Perpendicular**	**W**	**Ramp Slope**

1172 Clinton St and **S C St**

3664	**Perpendicular**	**E**	**Ramp Landing**
3662	**Perpendicular**	**N**	**Ramp Flare**
3663	**Curb Ramp Required**	**W**	**Access Route**

1193 Clinton St and **S Lake St**

4302	**Perpendicular**	**E**	**Ramp Landing**
4303	**Parallel**	**N**	**Ramp Slope**
4305	**Parallel**	**S**	**Access Route**
4304	**Perpendicular**	**W**	**Ramp Landing**

787 Clinton St and **Sycamore Ave**

4308	**Parallel**	**E**	**Ramp Cross Slope**
4307	**Perpendicular**	**N**	**Ramp Landing**
4306	**Perpendicular**	**W**	**Ramp Landing**

445 Clinton St and **Tozer St**

3211	**Perpendicular**	**E**	**Gutter**
3210	**Perpendicular**	**N**	**Gutter**
3212	**Perpendicular**	**S**	**Ramp Slope**
3209	**Perpendicular**	**W**	**Ramp Slope**

Cloud Rest Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

506 Cloud Rest Ct and **Monterey St**

351	**Curb Ramp Required**	**E**	**Access Route**
353	**Perpendicular**	**NW**	**Ramp Slope**
352	**Perpendicular**	**SW**	**Ramp Slope**

Coconut St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1589 Coconut St and **Hacienda St**

3484	**Perpendicular**	**NW**	**Ramp Width**
3485	**Curb Ramp Required**	**SW**	**Access Route**

Colima Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1545 Colima Ave and **Ivy Glen Dr**

2788	**Perpendicular**	**NE**	**Ramp Transition**
2789	**Perpendicular**	**NW**	**Ramp Width**

2790	**Parallel**	**SW**	**Detectable Warning Surface**

Columbia St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
848 Columbia St and **E Lincoln Ave**			
1160	**Perpendicular**	**NE**	**Gutter**
1159	**Perpendicular**	**NW**	**Ramp Slope**
1157	**Perpendicular**	**SE**	**Gutter**
1158	**Parallel**	**SW**	**Ramp Landing**
849 Columbia St and **E Rush St**			
1139	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1138	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1140	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1137	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
560 Columbia St and **Green Way**			
1227	**Curb Ramp Required**	**N**	**Access Route**
1228	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1229	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
814 Columbia St and **Riverside Dr**			
1165	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1166	**Perpendicular**	**NW**	**Ramp Flare**
1164	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
813 Columbia St and **W South St**			
1156	**Perpendicular**	**NE**	**Ramp Slope**
1155	**Perpendicular**	**NW**	**Ramp Landing**
1153	**Perpendicular**	**SE**	**Compliant Curb Ramp**
1154	**Perpendicular**	**SW**	**Ramp Landing**

Concord Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
951 Concord Ave and **Gary Ln**			
307	**Perpendicular**	**NE**	**Gutter**
308	**Perpendicular**	**NW**	**Ramp Flare**
306	**Perpendicular**	**SE**	**Ramp Landing**
305	**Perpendicular**	**SW**	**Gutter**
950 Concord Ave and **Madrid Ln**			
295	**Curb Ramp Required**	**N**	**Access Route**
296	**Perpendicular**	**SE**	**Ramp Slope**
297	**Perpendicular**	**SW**	**Ramp Landing**

Condor Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
153 Condor Dr and Aviation Dr			
3792	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3793	**Perpendicular**	**SW**	**Ramp Landing**
154 Condor Dr and Kennedy St			
3802	**Perpendicular**	**NE**	**Ramp Landing**
3799	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3801	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3800	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
871 Condor Dr and W Cleveland Ave			
2310	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2312	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2309	**Perpendicular**	**SE**	**Ramp Slope**
2311	**Perpendicular**	**SW**	**Ramp Slope**

Condor Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1049 Condor Rd and Boles St			
3814	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3813	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3812	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Corona Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
415 Corona Dr and La Costa Ct			
3447	**Perpendicular**	**NE**	**Ramp Width**
3448	**Curb Ramp Required**	**NW**	**Access Route**
3449	**Perpendicular**	**SE**	**Ramp Width**

Cortopassi St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1063 Cortopassi St and Dunham Ave			
3555	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3554	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3553	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Cosentino Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
215 Cosentino Dr and St Julien Dr			
246	**Perpendicular**	**NE**	**Detectable Warning Surface**
245	**Perpendicular**	**SE**	**Detectable Warnings**
244	**Curb Ramp Required**	**W**	**Access Route**
216 Cosentino Dr and St. Michelle Dr			
250	**Perpendicular**	**NE**	**Gutter**
249	**Perpendicular**	**NW**	**Ramp Slope**
247	**Perpendicular**	**SE**	**Ramp Slope**
248	**Perpendicular**	**SW**	**Ramp Slope**
217 Cosentino Dr and St. Montelena Dr			
210	**Perpendicular**	**NE**	**Ramp Slope**
209	**Perpendicular**	**SE**	**Ramp Slope**
208	**Curb Ramp Required**	**W**	**Access Route**

Country Club Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
458 Country Club Dr and Sharon Bvd			
3881	**Curb Ramp Required**	**E**	**Access Route**
3880	**Perpendicular**	**NW**	**Compliant Curb Ramp**
3879	**Perpendicular**	**SW**	**Ramp Slope**
457 Country Club Dr and W Sherwood Way			
3884	**Perpendicular**	**NE**	**Gutter**
3883	**Parallel**	**NW**	**Ramp Landing**
3885	**Perpendicular**	**SE**	**Gutter**
3882	**Parallel**	**SW**	**Ramp Slope**

Creek Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1038 Creek Dr and Ren Way			
1855	**Perpendicular**	**NE**	**Ramp Transition**
1857	**Perpendicular**	**NW**	**Ramp Slope**
1856	**Curb Ramp Required**	**S**	**Access Route**

Crimson Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
618 Crimson Way and Storey Rd			
4430	**Perpendicular**	**NE**	**Ramp Landing**

4429	**Perpendicular**	**NW**	**Ramp Landing**
4428	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Cross St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1128 Cross St and **Rose St**			
3265	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3264	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3266	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Crystal Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
395 Crystal Way and **Bo Tree Ln**			
2922	**Curb Ramp Required**	**NE**	**Access Route**
2921	**Perpendicular**	**SE**	**Ramp Landing**
2920	**Perpendicular**	**SW**	**Ramp Slope**
751 Crystal Way and **Gary Ln**			
2909	**Perpendicular**	**NE**	**Ramp Slope**
2908	**Perpendicular**	**NW**	**Gutter**
2906	**Perpendicular**	**SE**	**Ramp Transition**
2907	**Perpendicular**	**SW**	**Ramp Slope**
61 Crystal Way and **Strauss Ct**			
2902	**Perpendicular**	**NE**	**Ramp Slope**
2901	**Perpendicular**	**NW**	**Ramp Slope**
2903	**Curb Ramp Required**	**SW**	**Access Route**

Cutting St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
338 Cutting St and **E Lincoln Ave**			
1275	**Perpendicular**	**NE**	**Ramp Slope**
1274	**Perpendicular**	**NW**	**Gutter**
1272	**Perpendicular**	**SE**	**Ramp Flare**
1273	**Perpendicular**	**SW**	**Gutter**
1403 Cutting St and **Rush St**			
1256	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1255	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1257	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1254	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
489 Cutting St and **W South St**			
1270	**Combination**	**NE**	**Ramp Landing**
1271	**Combination**	**NW**	**Ramp Landing**

1269	**Curb Ramp Required**	**S**	**Access Route**

Cypress St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1316 Cypress St and **Oak St**			
2763	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2766	**Perpendicular**	**NW**	**Ramp Transition**
2764	**Perpendicular**	**SE**	**Gutter**
2765	**Perpendicular**	**SW**	**Ramp Slope**
828 Cypress St and **Olive Ave**			
2735	**Perpendicular**	**NE**	**Ramp Landing**
2734	**Perpendicular**	**SE**	**Ramp Landing**
2733	**Perpendicular**	**SW**	**Gutter**

D St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1315 D St and **6Th St**			
3643	**Combination**	**E**	**Ramp Landing**
3645	**Combination**	**N**	**Ramp Landing**
3644	**Parallel**	**S**	**Ramp Landing**
3646	**Perpendicular**	**W**	**Ramp Slope**
1176 D St and **7Th St**			
3640	**Perpendicular**	**E**	**Ramp Slope**
3641	**Perpendicular**	**N**	**Ramp Landing**
3637	**Parallel**	**S**	**Ramp Landing**
3642	**Curb Ramp Required**	**W**	**Access Route**

Davis St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
379 Davis St and **E Lincoln Ave**			
1184	**Perpendicular**	**NE**	**Ramp Slope**
1185	**Perpendicular**	**NW**	**Ramp Slope**
1183	**Driveway**	**S**	**Pedestrian Access Route**
469 Davis St and **Harding Ave**			
1188	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1187	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1186	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Del Lago Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

140 Del Lago Way and **Rancho Mirage Rd**

3138	**Curb Ramp Required**	**NE**	**Access Route**
3137	**Perpendicular**	**NW**	**Ramp Width**
3139	**Perpendicular**	**SW**	**Ramp Width**

Dellavalle Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

283 Dellavalle Ave and **E Lincoln Ave**

1315	**Perpendicular**	**NE**	**Ramp Slope**
1316	**Parallel**	**NW**	**Ramp Landing**
1314	**Perpendicular**	**SE**	**Ramp Flare**

879 Dellavalle Ave and **W Sherwood Way**

1378	**Perpendicular**	**NE**	**Ramp Slope**
1379	**Perpendicular**	**NW**	**Ramp Slope**
1381	**Perpendicular**	**SE**	**Gutter**
1380	**Perpendicular**	**SW**	**Ramp Slope**

361 Dellavalle Ave and **W South St**

1292	**Curb Ramp Required**	**NW**	**Access Route**
1290	**Perpendicular**	**SE**	**Ramp Landing**
1291	**Perpendicular**	**SW**	**Ramp Slope**

Desert Ranch Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

302 Desert Ranch Way and **Makenna Dr**

4394	**Perpendicular**	**NE**	**Ramp Landing**
4395	**Curb Ramp Required**	**SW**	**Access Route**

462 Desert Ranch Way and **S Double Tree Way**

2590	**Perpendicular**	**NE**	**Ramp Slope**
2589	**Perpendicular**	**SE**	**Ramp Slope**
2591	**Curb Ramp Required**	**SW**	**Access Route**

Diamante Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

505 Diamante Ln and **Orchard Hill Dr**

2803	**Curb Ramp Required**	**NE**	**Access Route**
2802	**Perpendicular**	**SE**	**Compliant Curb Ramp**
2801	**Perpendicular**	**SW**	**Ramp Transition**

Diamond Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

287 Diamond Way and **Bo Tree Ln**

2892	**Perpendicular**	**NE**	**Gutter**
2893	**Perpendicular**	**SE**	**Ramp Slope**
2894	**Curb Ramp Required**	**SW**	**Access Route**

994 Diamond Way and **Gary Ln**

2896	**Perpendicular**	**NE**	**Ramp Slope**
2895	**Perpendicular**	**NW**	**Gutter**
2897	**Perpendicular**	**SE**	**Gutter**
2898	**Perpendicular**	**SW**	**Ramp Slope**

1553 Diamond Way and **Joya Dr**

2891	**Curb Ramp Required**	**NW**	**Access Route**
2890	**Perpendicular**	**SE**	**Gutter**

1554 Diamond Way and **Strauss Ct**

2899	**Perpendicular**	**NE**	**Ramp Landing**
2900	**Curb Ramp Required**	**SE**	**Access Route**

Dominguez Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

493 Dominguez Dr and **Lacreta Ave**

2019	**Curb Ramp Required**	**N**	**Access Route**
2021	**Perpendicular**	**SE**	**Gutter**
2020	**Perpendicular**	**SW**	**Ramp Slope**

Double Checkavenue 15

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

629 Double Checkavenue 15 and **Tozer St**

3280	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3281	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3282	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Double Tree Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

264 Double Tree Ct and **Gamay Ave**

2594	**Curb Ramp Required**	**NE**	**Access Route**
2593	**Perpendicular**	**SE**	**Detectable Warning Surface**
2592	**Perpendicular**	**SW**	**Ramp Slope**

Double Tree Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1350 Double Tree Way and **Boulder Ave**

1499	**Perpendicular**	**NE**	**Ramp Slope**
1500	**Perpendicular**	**NW**	**Ramp Landing**
1498	**Perpendicular**	**SE**	**Ramp Slope**
1497	**Perpendicular**	**SW**	**Ramp Slope**

926 Double Tree Way and **Castle Way**

1507	**Curb Ramp Required**	**E**	**Access Route**
1506	**Perpendicular**	**NW**	**Ramp Slope**
1508	**Perpendicular**	**SW**	**Ramp Slope**

908 Double Tree Way and **Liberty Ln**

1395	**Driveway**	**ENE**	**Pedestrian Access Route**
1393	**Perpendicular**	**NE**	**Ramp Landing**
1396	**Perpendicular**	**SE**	**Ramp Landing**
1394	**Curb Ramp Required**	**W**	**Access Route**

900 Double Tree Way and **Paintbrush Dr**

1461	**Perpendicular**	**E**	**Ramp Slope**
1462	**Perpendicular**	**N**	**Ramp Slope**
1460	**Curb Ramp Required**	**SW**	**Access Route**

1440 Double Tree Way and **Suburban Ave**

1487	**Perpendicular**	**NE**	**Ramp Landing**
1488	**Perpendicular**	**NW**	**Ramp Slope**
1490	**Perpendicular**	**SE**	**Ramp Slope**
1489	**Perpendicular**	**SW**	**Ramp Slope**

622 Double Tree Way and **Winter Way**

1849	**Perpendicular**	**NE**	**Ramp Landing**
1851	**Perpendicular**	**SE**	**Ramp Slope**
1850	**Curb Ramp Required**	**W**	**Access Route**

Drake St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1569 Drake St and **Padre St**

3112	**Curb Ramp Required**	**NE**	**Access Route**
3111	**Perpendicular**	**SW**	**Ramp Width**

1571 Drake St and **Sauret St**

3124	**Perpendicular**	**NW**	**Gutter**
3125	**Curb Ramp Required**	**SE**	**Access Route**

Driftwood Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

712 Driftwood Dr and **Cypress Ct**

631	**Perpendicular**	**NE**	**Ramp Landing**

632	**Perpendicular**	**NW**	**Ramp Slope**
630	**Curb Ramp Required**	**S**	**Access Route**

907 Driftwood Dr and **Harbor Ct**

628	**Perpendicular**	**NE**	**Ramp Slope**
629	**Perpendicular**	**NW**	**Ramp Slope**
627	**Curb Ramp Required**	**S**	**Access Route**

18 Driftwood Dr and **Mainberry Dr**

634	**Perpendicular**	**NE**	**Ramp Landing**
635	**Perpendicular**	**SE**	**Ramp Landing**
633	**Curb Ramp Required**	**W**	**Access Route**

812 Driftwood Dr and **Monocott Dr**

1577	**Perpendicular**	**NE**	**Ramp Slope**
1575	**Perpendicular**	**SE**	**Ramp Slope**
1576	**Curb Ramp Required**	**W**	**Access Route**

Drysdale Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

42 Drysdale Way and **Podres Ln**

3291	**Curb Ramp Required**	**E**	**Access Route**
3290	**Perpendicular**	**S**	**Ramp Transition**
3292	**Perpendicular**	**W**	**Ramp Slope**

Dunham Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

575 Dunham Ave and **Madera Ave**

3577	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3582	**Parallel**	**NW**	**Ramp Cross Slope**
3584	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3583	**Perpendicular**	**SW**	**Gutter**

1044 Dunham Ave and **Martin St**

3551	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3550	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3552	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1045 Dunham Ave and **Monterey St**

370	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
369	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
368	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Dutra Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1323 Dutra Ct and **Stephanie Ln**

2524	**Perpendicular**	**NE**	**Ramp Slope**
2523	**Perpendicular**	**NW**	**Gutter**
2521	**Perpendicular**	**SE**	**Ramp Slope**
2522	**Perpendicular**	**SW**	**Ramp Slope**

Dutra Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
829 Dutra Way and **Arbella Ln**			
2510	**Perpendicular**	**NE**	**Ramp Transition**
2509	**Perpendicular**	**NW**	**Ramp Slope**
2511	**Curb Ramp Required**	**SE**	**Access Route**
830 Dutra Way and **N Schnoor Ave**			
2514	**Perpendicular**	**NE**	**Ramp Width**
2513	**Perpendicular**	**NW**	**Ramp Slope**
2515	**Perpendicular**	**SE**	**Ramp Slope**
2512	**Perpendicular**	**SW**	**Ramp Landing**

DWayer Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1257 DWayer Ave and **Modoc St**			
2625	**Perpendicular**	**NW**	**Ramp Landing**
2623	**Curb Ramp Required**	**SE**	**Access Route**
2624	**Perpendicular**	**SW**	**Ramp Transition**

E Clark St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
703 E Clark St and **N D St**			
3992	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3993	**Perpendicular**	**SE**	**Ramp Landing**
3991	**Curb Ramp Required**	**W**	**Access Route**

E Cleveland Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
277 E Cleveland Ave and **Celeste Ct**			
4056	**Parallel**	**NE**	**Ramp Cross Slope**
4057	**Parallel**	**NW**	**Ramp Cross Slope**
4055	**Curb Ramp Required**	**S**	**Access Route**
545 E Cleveland Ave and **Columbia St**			
1355	**Parallel**	**NE**	**Ramp Slope**
1354	**Parallel**	**NW**	**Ramp Cross Slope**

1352	**Parallel**	**SE**	**Ramp Cross Slope**
1353	**Parallel**	**SW**	**Ramp Slope**

582 E Cleveland Ave and **Cutting St**

4159	**Curb Ramp Required**	**N**	**Access Route**
4161	**Parallel**	**SE**	**Ramp Landing**
4160	**Parallel**	**SW**	**Ramp Cross Slope**

542 E Cleveland Ave and **Davis St**

1216	**Perpendicular**	**NE**	**Ramp Slope**
1217	**Perpendicular**	**NW**	**Ramp Slope**
1219	**Parallel**	**SE**	**Ramp Landing**
1218	**Parallel**	**SW**	**Ramp Slope**

584 E Cleveland Ave and **Dellavalle Ave**

4152	**Parallel**	**NE**	**Ramp Landing**
4151	**Parallel**	**NW**	**Ramp Landing**
4154	**Parallel**	**SE**	**Ramp Landing**
4153	**Parallel**	**SW**	**Ramp Cross Slope**

583 E Cleveland Ave and **Fresno St**

4175	**Curb Ramp Required**	**N**	**Access Route**
4173	**Parallel**	**NE**	**Ramp Cross Slope**
4172	**Parallel**	**NW**	**Ramp Slope**
4174	**Curb Ramp Required**	**S**	**Access Route**
4177	**Parallel**	**SE**	**Ramp Cross Slope**
4176	**Parallel**	**SW**	**Ramp Cross Slope**

975 E Cleveland Ave and **Kadota Ave**

4061	**Parallel**	**NE**	**Ramp Cross Slope**
4063	**Parallel**	**NW**	**Ramp Cross Slope**
4062	**Curb Ramp Required**	**S**	**Access Route**

546 E Cleveland Ave and **N D St**

1345	**Perpendicular**	**NE**	**Gutter**
1344	**Perpendicular**	**NW**	**Gutter**
1346	**Perpendicular**	**SE**	**Ramp Slope**
1347	**Perpendicular**	**SW**	**Gutter**

580 E Cleveland Ave and **N Lake St**

4167	**Perpendicular**	**NE**	**Ramp Landing**
4168	**Perpendicular**	**NW**	**Ramp Width**
4166	**Perpendicular**	**SE**	**Ramp Landing**
4165	**Perpendicular**	**SW**	**Ramp Landing**

543 E Cleveland Ave and **Owens St**

1211	**Perpendicular**	**NE**	**Gutter**
1210	**Perpendicular**	**NW**	**Ramp Flare**
1208	**Parallel**	**SE**	**Ramp Slope**
1209	**Parallel**	**SW**	**Ramp Slope**

544 E Cleveland Ave and **Sierra St**

1351	**Perpendicular**	**NE**	**Ramp Slope**

1350	**Parallel**	**NW**	**Ramp Landing**
1348	**Parallel**	**SE**	**Ramp Cross Slope**
1349	**Parallel**	**SW**	**Ramp Cross Slope**

547 E Cleveland Ave and **Sonora St**

1328	**Perpendicular**	**NE**	**Gutter**
1327	**Perpendicular**	**NW**	**Ramp Slope**
1325	**Parallel**	**SE**	**Ramp Landing**
1326	**Parallel**	**SW**	**Ramp Cross Slope**

581 E Cleveland Ave and **Tulare St**

4179	**Perpendicular**	**NE**	**Ramp Slope**
4180	**Parallel**	**NW**	**Ramp Cross Slope**
4178	**Parallel**	**SE**	**Ramp Slope**
4181	**Parallel**	**SW**	**Ramp Landing**

E Ellis St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1484 E Ellis St and

2063	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1948	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1949	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2064	**Perpendicular**	**SE**	**Ramp Slope**
2065	**Perpendicular**	**SW**	**Ramp Landing**

658 E Ellis St and **Eagle Dr**

2131	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2132	**Perpendicular**	**SE**	**Ramp Landing**
2133	**Perpendicular**	**SW**	**Compliant Curb Ramp**

657 E Ellis St and **Merced St**

2128	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2129	**Perpendicular**	**SE**	**Ramp Slope**
2130	**Perpendicular**	**SW**	**Ramp Flare**

E Kennedy St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1488 E Kennedy St and

1979	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1980	**Perpendicular**	**NW**	**Ramp Slope**
1978	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

656 E Kennedy St and **Jericho Dr**

2002	**Perpendicular**	**NE**	**Ramp Transition**
2003	**Perpendicular**	**NW**	**Ramp Slope**
2001	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

655 E Kennedy St and **Jesse Dr**

2099	**Perpendicular**	**NE**	**Ramp Transition**
2100	**Perpendicular**	**NW**	**Ramp Transition**
2098	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

654 E Kennedy St and **Merced St**

2105	**Perpendicular**	**NE**	**Gutter**
2106	**Perpendicular**	**NW**	**Ramp Landing**
2104	**Curb Ramp Required**	**S**	**Access Route**

653 E Kennedy St and **Tulare St**

2102	**Curb Ramp Required**	**N**	**Access Route**
2101	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2103	**Perpendicular**	**SW**	**Gutter**

E Lincoln Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

699 E Lincoln Ave and **Nebraska St**

1313	**Parallel**	**NE**	**Ramp Cross Slope**
1312	**Perpendicular**	**NW**	**Ramp Slope**
1311	**Perpendicular**	**SW**	**Ramp Slope**

E Pecan Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1504 E Pecan Ave and **Raymond Thomas St**

2982	**Curb Ramp Required**	**NW**	**Access Route**
2980	**Perpendicular**	**SE**	**Ramp Landing**
2981	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

E Riverside Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

878 E Riverside Dr and **Austin Ave**

1284	**Perpendicular**	**NE**	**Ramp Slope**
1285	**Perpendicular**	**NW**	**Gutter**
1286	**Perpendicular**	**SW**	**Ramp Landing**

902 E Riverside Dr and **Dellavalle Ave**

1288	**Perpendicular**	**NE**	**Ramp Landing**
1289	**Perpendicular**	**NW**	**Gutter**
1287	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

676 E Riverside Dr and **Fresno St**

4092	**Perpendicular**	**NE**	**Detectable Warning Surface**
4093	**Perpendicular**	**NW**	**Ramp Flare**
4091	**Perpendicular**	**SE**	**Compliant Curb Ramp**
4090	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

173 E Riverside Dr and **N Lake St**

4067	**Perpendicular**	**E**	**Ramp Landing**
4069	**Perpendicular**	**NW**	**Ramp Landing**
4068	**Perpendicular**	**SW**	**Ramp Landing**

1084 E Riverside Dr and **Nebraska St**

1297	**Perpendicular**	**NE**	**Ramp Slope**
1298	**Perpendicular**	**NW**	**Ramp Slope**
1296	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

E Yosemite Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1498 E Yosemite Ave and

2876	**Perpendicular**	**NE**	**Gutter**
2875	**Perpendicular**	**NW**	**Gutter**
3268	**Driveway**	**SE**	**Pedestrian Access Route**
2878	**Perpendicular**	**SW**	**Compliant Curb Ramp**

940 E Yosemite Ave and **6Th St**

3267	**Driveway**	**NW**	**Pedestrian Access Route**

737 E Yosemite Ave and **Almond Ave**

2879	**Perpendicular**	**NE**	**Ramp Landing**
2882	**Perpendicular**	**NW**	**Ramp Slope**
2880	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2881	**Perpendicular**	**SW**	**Ramp Landing**

50 E Yosemite Ave and **D St**

3650	**Perpendicular**	**E**	**Ramp Landing**
3649	**Perpendicular**	**N**	**Gutter**
3647	**Perpendicular**	**S**	**Gutter**
3648	**Perpendicular**	**W**	**Gutter**

735 E Yosemite Ave and **E Cleveland Ave**

4045	**Perpendicular**	**ENE**	**Ramp Landing**
4044	**Perpendicular**	**ESE**	**Ramp Landing**
4040	**Perpendicular**	**N**	**Detectable Warning Surface**
4043	**Perpendicular**	**SSE**	**Detectable Warning Surface**
4042	**Perpendicular**	**SW**	**Detectable Warning Surface**
4041	**Perpendicular**	**W**	**Ramp Slope**

352 E Yosemite Ave and **E Yosemite Ave**

4051	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4050	**Driveway**	**S**	**Pedestrian Access Route**

1077 E Yosemite Ave and **Elm Ave**

4046	**Pedestrian Pad**	**NW**	**Compliant Curb Ramp**
4049	**Perpendicular**	**S**	**Ramp Landing**
4047	**Perpendicular**	**SE**	**Ramp Landing**
4048	**Perpendicular**	**SW**	**Detectable Warning Surface**

741 E Yosemite Ave and **Flume St**

4353	**Perpendicular**	**E**	**Ramp Landing**
4352	**Curb Ramp Required**	**N**	**Access Route**
4351	**Perpendicular**	**S**	**Ramp Landing**

733 E Yosemite Ave and **High St**

4344	**Perpendicular**	**N**	**Gutter**
4343	**Curb Ramp Required**	**S**	**Access Route**
4342	**Perpendicular**	**W**	**Ramp Flare**

734 E Yosemite Ave and **Lyons St**

4347	**Parallel**	**N**	**Detectable Warning Surface**
4345	**Curb Ramp Required**	**S**	**Access Route**
4346	**Perpendicular**	**W**	**Ramp Landing**

862 E Yosemite Ave and **Mace St**

3271	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3270	**Parallel**	**N**	**Ramp Landing**
3269	**Perpendicular**	**W**	**Ramp Landing**

863 E Yosemite Ave and **Magnolia St**

3246	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3244	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3245	**Curb Ramp Required**	**W**	**Access Route**

48 E Yosemite Ave and **N A St**

4467	**Perpendicular**	**E**	**Detectable Warning Surface**
4466	**Perpendicular**	**N**	**Gutter**
4468	**Perpendicular**	**S**	**Ramp Landing**
4465	**Perpendicular**	**W**	**Detectable Warning Surface**

47 E Yosemite Ave and **N B St**

4461	**Perpendicular**	**E**	**Detectable Warning Surface**
4464	**Perpendicular**	**N**	**Detectable Warning Surface**
4462	**Perpendicular**	**S**	**Gutter**
4463	**Perpendicular**	**W**	**Detectable Warning Surface**

49 E Yosemite Ave and **N C St**

3654	**Parallel**	**E**	**Ramp Landing**
3653	**Parallel**	**N**	**Detectable Warning Surface**
3651	**Parallel**	**S**	**Ramp Landing**
3652	**Parallel**	**W**	**Ramp Landing**

44 E Yosemite Ave and **N E St**

4482	**Parallel**	**E**	**Ramp Cross Slope**
4480	**Perpendicular**	**N**	**Ramp Slope**
4483	**Perpendicular**	**S**	**Ramp Slope**
4481	**Curb Ramp Required**	**W**	**Access Route**

46 E Yosemite Ave and **Pecan Ave**

2872	**Perpendicular**	**NE**	**Ramp Slope**
2871	**Perpendicular**	**NW**	**Ramp Slope**

2873	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2874	**Perpendicular**	**SW**	**Ramp Slope**

706 E Yosemite Ave and **S Gateway Dr**

4484	**Perpendicular**	**E**	**Ramp Slope**
4487	**Perpendicular**	**N**	**Ramp Slope**
4485	**Perpendicular**	**S**	**Ramp Slope**
4486	**Parallel**	**W**	**Ramp Cross Slope**

51 E Yosemite Ave and **S Lake St**

4489	**Perpendicular**	**E**	**Ramp Slope**
4490	**Perpendicular**	**N**	**Ramp Slope**
4488	**Perpendicular**	**S**	**Ramp Slope**
4491	**Perpendicular**	**W**	**Ramp Slope**

152 E Yosemite Ave and **Storey Rd**

4038	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4039	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4037	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1004 E Yosemite Ave and **Vineyard Ave**

4348	**Parallel**	**N**	**Ramp Landing**
4349	**Curb Ramp Required**	**S**	**Access Route**
4350	**Perpendicular**	**W**	**Ramp Slope**

Echo St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1489 Echo St and

2168	**Driveway**	**W**	**Pedestrian Access Route**

Eighth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

855 Eighth St and **S H St**

4223	**Perpendicular**	**E**	**Ramp Landing**
4222	**Perpendicular**	**N**	**Ramp Landing**
4221	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1419 Eighth St and **S J St**

137	**Combination**	**E**	**Ramp Slope**
140	**Combination**	**N**	**Ramp Flare**
138	**Perpendicular**	**S**	**Ramp Landing**
139	**Perpendicular**	**W**	**Ramp Landing**

1420 Eighth St and **S K St**

130	**Combination**	**E**	**Ramp Landing**
127	**Perpendicular**	**N**	**Ramp Landing**
129	**Perpendicular**	**S**	**Ramp Landing**
128	**Combination**	**W**	**Ramp Slope**

Eisenhower Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
375 Eisenhower Ln and Coolidge St			
2028	**Curb Ramp Required**	**N**	**Access Route**
2029	**Perpendicular**	**SE**	**Ramp Slope**
2030	**Perpendicular**	**SW**	**Ramp Slope**
374 Eisenhower Ln and Madison Dr			
2037	**Curb Ramp Required**	**NW**	**Access Route**
2038	**Perpendicular**	**SE**	**Ramp Slope**
1515 Eisenhower Ln and Truman Dr			
1954	**Curb Ramp Required**	**NE**	**Access Route**
1955	**Perpendicular**	**SW**	**Ramp Slope**

El Dorado Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
912 El Dorado Dr and Madera Ave			
3571	**Perpendicular**	**NE**	**Ramp Landing**
3570	**Curb Ramp Required**	**NW**	**Access Route**
3572	**Perpendicular**	**SE**	**Ramp Slope**

El Monte Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1510 El Monte Ave and Stadium Rd			
392	**Curb Ramp Required**	**E**	**Access Route**
390	**Perpendicular**	**NW**	**Ramp Slope**
394	**Perpendicular**	**SE**	**Ramp Slope**
391	**Perpendicular**	**SW**	**Ramp Slope**
393	**Perpendicular**	**WSW**	**Ramp Slope**

El Monte Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1189 El Monte Ct and Monterey St			
355	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
356	**Perpendicular**	**SE**	**Gutter**
354	**Curb Ramp Required**	**W**	**Access Route**

El Monte St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1508 El Monte St and

319	**Perpendicular**	**SW**	**Ramp Slope**

Elm Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
411 Elm Ave and **Santa Fe Ct**			
3221	**Curb Ramp Required**	**E**	**Access Route**
3219	**Perpendicular**	**S**	**Ramp Transition**
3220	**Perpendicular**	**W**	**Ramp Slope**
410 Elm Ave and **Santa Fe St**			
3216	**Perpendicular**	**E**	**Ramp Transition**
3217	**Perpendicular**	**N**	**Detectable Warning Surface**
3218	**Curb Ramp Required**	**W**	**Access Route**

Emerald Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
143 Emerald Way and **Scarlet Dr**			
4437	**Parallel**	**N**	**Ramp Landing**
4439	**Perpendicular**	**SE**	**Ramp Landing**
4438	**Perpendicular**	**SW**	**Ramp Landing**
144 Emerald Way and **Storey Rd**			
4441	**Perpendicular**	**NE**	**Ramp Landing**
4442	**Perpendicular**	**NW**	**Ramp Landing**
4440	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Emily Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
371 Emily Way and **Bo Tree Ln**			
2925	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2924	**Perpendicular**	**NW**	**Ramp Slope**
2923	**Perpendicular**	**SW**	**Gutter**
372 Emily Way and **Gary Ln**			
2911	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2910	**Perpendicular**	**NW**	**Ramp Slope**
2912	**Curb Ramp Required**	**SW**	**Access Route**
370 Emily Way and **Joya Dr**			
2887	**Perpendicular**	**NW**	**Ramp Slope**
2889	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2888	**Perpendicular**	**SW**	**Ramp Landing**

Express Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
681 Express Ct and Glade Ave			
2271	**Perpendicular**	**NE**	**Ramp Slope**
2272	**Perpendicular**	**SE**	**Ramp Slope**
2273	**Curb Ramp Required**	**SW**	**Access Route**

Fairfield Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1496 Fairfield Way and			
2345	**Curb Ramp Required**	**NW**	**Access Route**
2343	**Perpendicular**	**SE**	**Ramp Width**
2344	**Perpendicular**	**SW**	**Gutter**

Fairview Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1325 Fairview Ave and Fifth St			
524	**Combination**	**NE**	**Ramp Width**
523	**Combination**	**NW**	**Ramp Width**
525	**Combination**	**SE**	**Ramp Width**
522	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1324 Fairview Ave and Fourth St			
494	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
493	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
496	**Combination**	**SE**	**Ramp Width**
495	**Combination**	**SW**	**Ramp Width**
1404 Fairview Ave and Third St			
455	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
454	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
456	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
457	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Fairview St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
331 Fairview St and Adell St			
4494	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4493	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4492	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
332 Fairview St and W Clark St			

3864	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3863	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3865	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Fall Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
213 Fall Ave and Westgate Dr			
1741	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1740	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1739	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Ficklin Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
29 Ficklin Dr and Chatom Way			
228	**Curb Ramp Required**	**N**	**Access Route**
229	**Perpendicular**	**SE**	**Gutter**
230	**Perpendicular**	**SW**	**Ramp Landing**

Fifth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
873 Fifth St and N J St			
173	**Perpendicular**	**E**	**Ramp Flare**
174	**Curb Ramp Required**	**N**	**Access Route**
175	**Perpendicular**	**S**	**Ramp Landing**
1295 Fifth St and N L St			
180	**Perpendicular**	**E**	**Ramp Landing**
181	**Perpendicular**	**N**	**Ramp Landing**
182	**Parallel**	**NW**	**Gutter**
183	**Perpendicular**	**S**	**Ramp Slope**
187	**Parallel**	**SW**	**Gutter**
1296 Fifth St and N M St			
184	**Combination**	**E**	**Ramp Cross Slope**
185	**Combination**	**N**	**Ramp Cross Slope**
188	**Combination**	**S**	**Ramp Flare**
186	**Combination**	**W**	**Ramp Landing**
1308 Fifth St and N N St			
189	**Curb Ramp Required**	**E**	**Access Route**
190	**Combination**	**N**	**Ramp Cross Slope**
192	**Combination**	**S**	**Ramp Width**
191	**Combination**	**W**	**Ramp Flare**
1307 Fifth St and N O St			

619	**Perpendicular**	**E**	**Ramp Slope**
620	**Combination**	**N**	**Ramp Cross Slope**
618	**Combination**	**S**	**Gutter**
617	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1104 Fifth St and **Pine St**

2728	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2729	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2727	**Perpendicular**	**SE**	**Ramp Slope**

Fig Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1017 Fig Ave and **Cross St**

3182	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3180	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3181	**Perpendicular**	**W**	**Ramp Landing**

1018 Fig Ave and **E Yosemite Ave**

3183	**Perpendicular**	**E**	**Gutter**
3185	**Curb Ramp Required**	**N**	**Access Route**
3184	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1208 Fig Ave and **Washington St**

3187	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3188	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3186	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Fillmore Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

170 Fillmore Ave and **Imperial Dr**

696	**Perpendicular**	**NE**	**Ramp Landing**
697	**Perpendicular**	**SE**	**Ramp Landing**
695	**Curb Ramp Required**	**W**	**Access Route**

Fisk Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

803 Fisk Ct and **Central Pl**

840	**Perpendicular**	**NE**	**Ramp Landing**
841	**Perpendicular**	**SE**	**Ramp Landing**
839	**Curb Ramp Required**	**W**	**Access Route**

Forum Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

323 Forum Way and **Glenville Ave**

2319	**Curb Ramp Required**	**NE**	**Access Route**
2320	**Perpendicular**	**NW**	**Gutter**
2321	**Perpendicular**	**SW**	**Ramp Slope**

321 Forum Way and **N Westberry Blv**

2304	**Perpendicular**	**NE**	**Ramp Slope**
2303	**Perpendicular**	**NW**	**Ramp Slope**
2301	**Perpendicular**	**SE**	**Ramp Slope**
2302	**Perpendicular**	**SW**	**Ramp Slope**

Foster Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1198 Foster Ave and **N Park Dr**

927	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
929	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
928	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Fountain Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

254 Fountain Way and **Wessmith Way**

2199	**Perpendicular**	**NE**	**Ramp Slope**
2196	**Perpendicular**	**NW**	**Ramp Slope**
2198	**Perpendicular**	**SE**	**Ramp Slope**
2197	**Perpendicular**	**SW**	**Ramp Slope**

252 Fountain Way and **Wrenwood Way**

2193	**Curb Ramp Required**	**E**	**Access Route**
2194	**Perpendicular**	**NW**	**Ramp Landing**
2195	**Perpendicular**	**SW**	**Ramp Slope**

Fourth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1392 Fourth St and **Krest St**

580	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
579	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
581	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
578	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1021 Fourth St and **N K St**

980	**Curb Ramp Required**	**E**	**Access Route**
979	**Perpendicular**	**S**	**Ramp Landing**
981	**Perpendicular**	**W**	**Ramp Landing**

1293 Fourth St and **N L St**

204	**Perpendicular**	**E**	**Ramp Landing**
203	**Perpendicular**	**N**	**Ramp Landing**
201	**Perpendicular**	**S**	**Ramp Landing**
202	**Perpendicular**	**W**	**Ramp Landing**

1294 Fourth St and **N M St**

200	**Perpendicular**	**E**	**Ramp Landing**
199	**Perpendicular**	**N**	**Ramp Landing**
197	**Perpendicular**	**S**	**Ramp Landing**
198	**Perpendicular**	**W**	**Ramp Landing**

1095 Fourth St and **N P St**

512	**Perpendicular**	**E**	**Detectable Warning Surface**
510	**Curb Ramp Required**	**NW**	**Access Route**
511	**Perpendicular**	**S**	**Gutter**

1394 Fourth St and **Rotan Ave**

500	**Combination**	**NE**	**Ramp Width**
497	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
499	**Combination**	**SE**	**Ramp Width**
498	**Combination**	**SW**	**Ramp Width**

1442 Fourth St and **Schnoor Ave**

598	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
597	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
599	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
600	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1014 Fourth St and **Shannon Ave**

576	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
577	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
575	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

923 Fourth St and **Williams Ave**

488	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
487	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
486	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1363 Fourth St and **Willis Ave**

491	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
490	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
492	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
489	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Foxglove Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

697 Foxglove Way and **N Granada Dr**

2417	**Perpendicular**	**NE**	**Ramp Slope**
2418	**Perpendicular**	**NW**	**Ramp Slope**
2416	**Perpendicular**	**SE**	**Ramp Slope**

770 Foxglove Way and **Sundance Ln**

2419	**Curb Ramp Required**	**NW**	**Access Route**
2421	**Perpendicular**	**SE**	**Ramp Slope**
2420	**Perpendicular**	**SW**	**Ramp Slope**

769 Foxglove Way and **W Cleveland Ave**

2392	**Perpendicular**	**NE**	**Ramp Slope**
2393	**Perpendicular**	**NW**	**Ramp Width**
2391	**Perpendicular**	**SE**	**Ramp Slope**
2390	**Perpendicular**	**SW**	**Ramp Slope**

Fresno St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

680 Fresno St and **Daulton Ave**

4077	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4076	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4078	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4079	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

593 Fresno St and **E Clark St**

2232	**Curb Ramp Required**	**N**	**Access Route**
2233	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2234	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

679 Fresno St and **E Lincoln Ave**

4107	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4106	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4104	**Curb Ramp Required**	**SE**	**Access Route**
4105	**Curb Ramp Required**	**SW**	**Access Route**

Gamay Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1076 Gamay Ave and **Barbera Ave**

2543	**Curb Ramp Required**	**NE**	**Access Route**
2542	**Perpendicular**	**SE**	**Ramp Slope**
2544	**Perpendicular**	**SW**	**Ramp Slope**

898 Gamay Ave and **Chablis Ave**

2546	**Curb Ramp Required**	**NE**	**Access Route**
2545	**Perpendicular**	**SE**	**Gutter**
2547	**Perpendicular**	**SW**	**Ramp Slope**

1511 Gamay Ave and **Fair Oak Ave**

395	**Perpendicular**	**NE**	**Ramp Slope**

913 Gamay Ave and **Petite Ave**

2561	**Perpendicular**	**NW**	**Gutter**

2539	**Perpendicular**	**SE**	**Ramp Slope**
2562	**Curb Ramp Required**	**SW**	**Access Route**

585 Gamay Ave and **S Timberline Dr**

2585	**Perpendicular**	**NE**	**Gutter**
2582	**Perpendicular**	**NW**	**Ramp Width**
2584	**Perpendicular**	**SE**	**Gutter**
2583	**Perpendicular**	**SW**	**Ramp Landing**

568 Gamay Ave and **Stadium Rd**

397	**Curb Ramp Required**	**E**	**Access Route**
398	**Perpendicular**	**NW**	**Ramp Slope**
399	**Perpendicular**	**SW**	**Ramp Slope**
396	**Perpendicular**	**WNW**	**Ramp Slope**

586 Gamay Ave and **Westberry Bvd**

2580	**Perpendicular**	**NE**	**Detectable Warning Surface**
2581	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2579	**Perpendicular**	**SE**	**Ramp Slope**

Gamay St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

946 Gamay St and **Blueridge Dr**

420	**Perpendicular**	**NE**	**Ramp Slope**
419	**Perpendicular**	**NW**	**Ramp Slope**
418	**Curb Ramp Required**	**S**	**Access Route**

255 Gamay St and **Stadium Rd**

417	**Perpendicular**	**NE**	**Ramp Slope**
416	**Perpendicular**	**SE**	**Gutter**
415	**Curb Ramp Required**	**W**	**Access Route**

Garfield Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

831 Garfield Ave and **Fresno St**

4110	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4109	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4111	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4108	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

805 Garfield Ave and **Merced St**

4113	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4112	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4114	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4115	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

114 Garfield Ave and **N Lake St**

4136	**Perpendicular**	**NE**	**Ramp Landing**

4138	**Perpendicular**	**SE**	**Ramp Landing**
4137	**Curb Ramp Required**	**W**	**Access Route**

95 Garfield Ave and **Tulare St**

4117	**Curb Ramp Required**	**E**	**Access Route**
4116	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4118	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Gary Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1197 Gary Ln and **Colombard Dr**

288	**Perpendicular**	**NE**	**Ramp Landing**
289	**Perpendicular**	**NW**	**Ramp Flare**
287	**Perpendicular**	**SE**	**Ramp Slope**
286	**Perpendicular**	**SW**	**Ramp Landing**

1196 Gary Ln and **Seneca Dr**

284	**Perpendicular**	**NE**	**Ramp Slope**
283	**Perpendicular**	**NW**	**Ramp Slope**
285	**Perpendicular**	**SE**	**Ramp Slope**
282	**Perpendicular**	**SW**	**Ramp Slope**

403 Gary Ln and **Stadium Rd**

238	**Under Construction**	**NE**	**Existing Curb Ramp**
240	**Perpendicular**	**SE**	**Ramp Slope**
239	**Under Construction**	**W**	**Existing Curb Ramp**

Gateway Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

105 Gateway Dr and **S Gateway Dr**

4424	**Curb Ramp Required**	**NE**	**Access Route**
4422	**Perpendicular**	**S**	**Ramp Landing**
4423	**Perpendicular**	**W**	**Ramp Landing**

Georgia Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1603 Georgia Ave and **Lemon Ave**

3764	**Curb Ramp Required**	**E**	**Access Route**
3763	**Perpendicular**	**W**	**Gutter**

1604 Georgia Ave and **Lime Ave**

3766	**Perpendicular**	**E**	**Gutter**
3765	**Perpendicular**	**S**	**Ramp Landing**
3767	**Curb Ramp Required**	**W**	**Access Route**

430 Georgia Ave and **Valencia Ave**

3734	**Perpendicular**	**E**	**Gutter**
3735	**Perpendicular**	**S**	**Ramp Flare**
3736	**Curb Ramp Required**	**W**	**Access Route**

Georgia Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
621 Georgia Ct and **Valencia Ave**			
3731	**Perpendicular**	**N**	**Detectable Warnings**
3732	**Curb Ramp Required**	**NE**	**Access Route**
3733	**Perpendicular**	**SW**	**Detectable Warnings**

Gill Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
274 Gill Ave and **Noble St**			
2767	**Curb Ramp Required**	**NW**	**Access Route**
2768	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Glenville Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
671 Glenville Ave and **Common Way**			
2316	**Perpendicular**	**NW**	**Ramp Slope**
2318	**Curb Ramp Required**	**SE**	**Access Route**
2317	**Perpendicular**	**SW**	**Gutter**

Gold St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1020 Gold St and **Redwood Dr**			
961	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
960	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
959	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1019 Gold St and **S Park Dr**			
963	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
964	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
962	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Golden State Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
591 Golden State Dr and **Almond Ave**			
4419	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**

4421	**Perpendicular**	**NW**	**Ramp Slope**
4418	**Perpendicular**	**SE**	**Ramp Slope**
4420	**Perpendicular**	**SW**	**Ramp Slope**

563 Golden State Dr and **Gary Ln**

4417	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4415	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
4416	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Granada Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1476 Granada Dr and **Apple Tree Dr**			
2691	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2690	**Perpendicular**	**NW**	**Ramp Slope**
2689	**Perpendicular**	**SW**	**Ramp Width**
965 Granada Dr and **Holiday Way**			
1646	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1648	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1647	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1188 Granada Dr and **Industrial Ave**			
1906	**Perpendicular**	**NE**	**Ramp Flare**
1905	**Perpendicular**	**SE**	**Ramp Landing**
1904	**Curb Ramp Required**	**W**	**Access Route**
510 Granada Dr and **Mitchell Ct**			
2568	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2569	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2567	**Perpendicular**	**SE**	**Ramp Slope**
964 Granada Dr and **National Ave**			
1650	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1652	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1649	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1651	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
674 Granada Dr and **Plumas Street**			
1879	**Curb Ramp Required**	**E**	**Access Route**
1880	**Perpendicular**	**NW**	**Ramp Slope**
1881	**Perpendicular**	**SW**	**Ramp Landing**
1253 Granada Dr and **Sunnydale St**			
1623	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1622	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1624	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1409 Granada Dr and **Third St**			
1735	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1734	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1732	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1733	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1194 Granada Dr and **W Almond Ave**

1917	**Perpendicular**	**NE**	**Ramp Landing**
1919	**Perpendicular**	**NW**	**Ramp Landing**
1918	**Parallel**	**SE**	**Ramp Cross Slope**
1920	**Perpendicular**	**SW**	**Ramp Landing**

Grant Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

919 Grant Ave and **Fresno St**

4129	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4128	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4126	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4127	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

212 Grant Ave and **N Lake St**

4131	**Perpendicular**	**NE**	**Ramp Landing**
4132	**Perpendicular**	**SE**	**Ramp Landing**
4130	**Curb Ramp Required**	**W**	**Access Route**

406 Grant Ave and **Tulare St**

4120	**Curb Ramp Required**	**E**	**Access Route**
4119	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4121	**Perpendicular**	**SW**	**Ramp Landing**

Grapefruit Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

13 Grapefruit Way and **Georgia Ave**

3750	**Curb Ramp Required**	**E**	**Access Route**
3749	**Perpendicular**	**S**	**Gutter**
3748	**Perpendicular**	**W**	**Gutter**

14 Grapefruit Way and **Valencia Ave**

3738	**Curb Ramp Required**	**E**	**Access Route**
3737	**Perpendicular**	**N**	**Gutter**
3739	**Curb Ramp Required**	**W**	**Access Route**

Green Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

826 Green Way and **Austin Ave**

1370	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1369	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1368	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

824 Green Way and **Dellavalle Ave**

1366	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1365	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1367	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1364	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

385 Green Way and **Fresno St**

4027	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4026	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4029	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4028	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

384 Green Way and **Merced St**

4034	**Curb Ramp Required**	**E**	**Access Route**
4036	**Combination**	**NW**	**Ramp Width**
4035	**Combination**	**SW**	**Ramp Width**

827 Green Way and **N D St**

1340	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1343	**Perpendicular**	**NW**	**Ramp Slope**
1341	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1342	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

825 Green Way and **Nebraska Ave**

1359	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1358	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1356	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1357	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Greenwood Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1118 Greenwood Dr and **Monocott Dr**

1574	**Perpendicular**	**NE**	**Ramp Slope**
1573	**Perpendicular**	**SE**	**Ramp Landing**
1572	**Curb Ramp Required**	**W**	**Access Route**

1117 Greenwood Dr and **Sandlewood Dr**

1569	**Curb Ramp Required**	**N**	**Access Route**
1570	**Perpendicular**	**SE**	**Ramp Slope**
1571	**Perpendicular**	**SW**	**Ramp Landing**

Grenache Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1528 Grenache Ave and **Chianti Ave**

2553	**Perpendicular**	**NE**	**Ramp Slope**
2554	**Curb Ramp Required**	**SE**	**Access Route**

1527 Grenache Ave and **Gamay Ave**

2549	**Curb Ramp Required**	**NW**	**Access Route**

2548	**Perpendicular**	**SE**	**Ramp Landing**

899 Grenache Ave and **Merlot Ave**

2550	**Perpendicular**	**NE**	**Ramp Landing**
2551	**Perpendicular**	**SE**	**Ramp Slope**
2552	**Curb Ramp Required**	**SW**	**Access Route**

Hacienda St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

764 Hacienda St and **Apple Ct**

3475	**Perpendicular**	**NE**	**Ramp Width**
3472	**Perpendicular**	**NW**	**Ramp Slope**
3474	**Perpendicular**	**SE**	**Ramp Width**
3473	**Perpendicular**	**SW**	**Ramp Slope**

66 Hacienda St and **La Quinta Way**

3470	**Curb Ramp Required**	**NE**	**Access Route**
3469	**Perpendicular**	**SE**	**Ramp Width**
3471	**Perpendicular**	**SW**	**Detectable Warnings**

65 Hacienda St and **Pomegranate St**

3483	**Curb Ramp Required**	**NE**	**Access Route**
3481	**Perpendicular**	**NW**	**Ramp Slope**
3482	**Perpendicular**	**SW**	**Ramp Width**

Half Dome Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

645 Half Dome Ct and **Monterey St**

348	**Curb Ramp Required**	**E**	**Access Route**
350	**Perpendicular**	**NW**	**Ramp Slope**
349	**Perpendicular**	**SW**	**Ramp Slope**

Harrison Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

794 Harrison Ct and **Jefferson Ave**

729	**Perpendicular**	**NE**	**Ramp Slope**
728	**Perpendicular**	**NW**	**Ramp Landing**
727	**Curb Ramp Required**	**S**	**Access Route**

Harvard Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1153 Harvard Ave and **Jefferson Ave**

865	**Curb Ramp Required**	**E**	**Access Route**

867	**Perpendicular**	**NW**	**Ramp Landing**
866	**Perpendicular**	**SW**	**Ramp Slope**

1154 Harvard Ave and **Princeton Ave**

862	**Curb Ramp Required**	**E**	**Access Route**
864	**Perpendicular**	**NW**	**Ramp Slope**
863	**Perpendicular**	**SW**	**Ramp Width**

Hawk Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

110 Hawk Ln and **Blue Sky Ln**

2124	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2125	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2127	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2126	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

113 Hawk Ln and **Eagle Dr**

2134	**Driveway**	**E**	**Pedestrian Access Route**

111 Hawk Ln and **Meadow Lark Way**

2120	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2121	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2123	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2122	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

112 Hawk Ln and **Merced St**

2114	**Curb Ramp Required**	**E**	**Access Route**
2116	**Perpendicular**	**NW**	**Ramp Landing**
2115	**Perpendicular**	**SW**	**Ramp Slope**

Hazel Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1503 Hazel Ave and **Lemon Ave**

3761	**Perpendicular**	**NE**	**Gutter**
3760	**Perpendicular**	**NW**	**Detectable Warnings**
3762	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1602 Hazel Ave and **Raymond Thomas St**

3746	**Perpendicular**	**NE**	**Ramp Transition**
3747	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Hazelnut Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1532 Hazelnut Dr and **Cherry Tree Dr**

2635	**Perpendicular**	**NE**	**Gutter**
2636	**Curb Ramp Required**	**SW**	**Access Route**

Helena Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
719 Helena Way and Concord Ave			
278	**Perpendicular**	**NE**	**Ramp Landing**
277	**Perpendicular**	**NW**	**Ramp Landing**
276	**Curb Ramp Required**	**S**	**Access Route**
1005 Helena Way and Monterey St			
274	**Perpendicular**	**NE**	**Ramp Slope**
275	**Perpendicular**	**SE**	**Gutter**
273	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
718 Helena Way and Seneca Dr			
279	**Curb Ramp Required**	**E**	**Access Route**
281	**Perpendicular**	**NW**	**Ramp Slope**
280	**Perpendicular**	**SW**	**Ramp Slope**

Hickory Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1088 Hickory Ave and Chestnut Ave			
2939	**Perpendicular**	**NW**	**Ramp Slope**
2938	**Curb Ramp Required**	**SE**	**Access Route**
2937	**Perpendicular**	**SW**	**Gutter**

Hillsboro Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
249 Hillsboro Ave and Fairfield Way			
2337	**Perpendicular**	**NE**	**Ramp Transition**
2336	**Perpendicular**	**NW**	**Ramp Slope**
2338	**Perpendicular**	**SE**	**Ramp Transition**
2339	**Perpendicular**	**SW**	**Ramp Slope**
247 Hillsboro Ave and Fairway Ave			
2280	**Perpendicular**	**NW**	**Ramp Landing**
2282	**Curb Ramp Required**	**SE**	**Access Route**
2281	**Perpendicular**	**SW**	**Ramp Slope**
250 Hillsboro Ave and Glade Ave			
2276	**Curb Ramp Required**	**NW**	**Access Route**
2275	**Perpendicular**	**SE**	**Ramp Slope**
2274	**Perpendicular**	**SW**	**Ramp Slope**
246 Hillsboro Ave and Glenville Ave			
2277	**Curb Ramp Required**	**NE**	**Access Route**
2278	**Perpendicular**	**NW**	**Ramp Slope**

2279	**Perpendicular**	**SW**	**Gutter**

245 Hillsboro Ave and **Hampton Dr**

2341	**Perpendicular**	**NE**	**Ramp Landing**
2342	**Perpendicular**	**NW**	**Gutter**
2340	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

248 Hillsboro Ave and **Mateo Way**

2283	**Curb Ramp Required**	**NE**	**Access Route**
2284	**Perpendicular**	**NW**	**Ramp Width**
2285	**Perpendicular**	**SW**	**Ramp Width**

Hilton St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1427 Hilton St and **Fourth St**

591	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
590	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
592	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
593	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

918 Hilton St and **National Ave**

556	**Curb Ramp Required**	**N**	**Access Route**
557	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
558	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Holiday Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1053 Holiday Ct and **Valley Way**

1664	**Perpendicular**	**NE**	**Ramp Landing**
1665	**Perpendicular**	**SE**	**Ramp Landing**
1663	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Hollow Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

329 Hollow Ave and **N Westberry Blv**

2353	**Perpendicular**	**NE**	**Ramp Slope**
2352	**Perpendicular**	**SE**	**Ramp Transition**

330 Hollow Ave and **Tiburon Way**

2351	**Curb Ramp Required**	**NE**	**Access Route**
2349	**Perpendicular**	**NW**	**Ramp Slope**
2350	**Perpendicular**	**SW**	**Ramp Slope**

Hoover Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
564 Hoover Ave and Coolidge St			
1965	**Curb Ramp Required**	**N**	**Access Route**
1967	**Perpendicular**	**SE**	**Ramp Slope**
1966	**Perpendicular**	**SW**	**Gutter**
1516 Hoover Ave and Truman Dr			
1968	**Curb Ramp Required**	**NE**	**Access Route**
1969	**Perpendicular**	**SW**	**Ramp Landing**

Howard Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
750 Howard Rd and Amerine Ave			
2701	**Parallel**	**NE**	**Ramp Landing**
2702	**Parallel**	**NW**	**Ramp Landing**
2700	**Perpendicular**	**SE**	**Ramp Slope**
689 Howard Rd and Asilomar Dr			
1792	**Perpendicular**	**NE**	**Ramp Landing**
1793	**Perpendicular**	**NW**	**Ramp Landing**
1791	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1341 Howard Rd and Autumn Rd			
1832	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1831	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1829	**Perpendicular**	**SE**	**Ramp Landing**
1830	**Perpendicular**	**SW**	**Ramp Landing**
1283 Howard Rd and Berry Dr			
1768	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1771	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1769	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1770	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1002 Howard Rd and Dwayer Ave			
2698	**Curb Ramp Required**	**NE**	**Access Route**
2697	**Perpendicular**	**SE**	**Ramp Width**
2699	**Parallel**	**SW**	**Ramp Landing**
1233 Howard Rd and Fairview Ave			
2713	**Perpendicular**	**NE**	**Ramp Slope**
2712	**Perpendicular**	**NW**	**Ramp Landing**
2714	**Perpendicular**	**SE**	**Ramp Slope**
2715	**Combination**	**SW**	**Access Route**
1385 Howard Rd and Granada Dr			

1819	**Perpendicular**	**NE**	**Detectable Warning Surface**
1820	**Perpendicular**	**NW**	**Detectable Warning Surface**
1822	**Parallel**	**SE**	**Ramp Landing**
1821	**Perpendicular**	**SW**	**Ramp Landing**

933 Howard Rd and Hilton St

1806	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1810	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1811	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1809	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1808	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

932 Howard Rd and Krest St

1814	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1812	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1813	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1036 Howard Rd and Mainberry Dr

1818	**Driveway**	**S**	**Pedestrian Access Route**

1432 Howard Rd and Pine St

2721	**Perpendicular**	**NE**	**Gutter**
2720	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2722	**Perpendicular**	**SE**	**Gutter**
2723	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

963 Howard Rd and Point West

1825	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1823	**Perpendicular**	**NW**	**Gutter**
1824	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1156 Howard Rd and Rotan Ave

2719	**Parallel**	**NE**	**Access Route**
2718	**Perpendicular**	**NW**	**Clear Space**
2717	**Perpendicular**	**SE**	**Ramp Width**
2716	**Perpendicular**	**SW**	**Ramp Transition**

1497 Howard Rd and Santa Lucia Dr

1790	**Perpendicular**	**NE**	**Ramp Landing**
1789	**Perpendicular**	**NW**	**Ramp Landing**
1788	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1070 Howard Rd and Sassafras Dr

1730	**Curb Ramp Required**	**NE**	**Access Route**
1729	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1731	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1285 Howard Rd and Schnoor Ave

2703	**Perpendicular**	**NE**	**Ramp Slope**
2704	**Perpendicular**	**NW**	**Ramp Slope**
2706	**Perpendicular**	**SE**	**Gutter**
2705	**Perpendicular**	**SW**	**Ramp Landing**

1071 Howard Rd and **Shannon Ave**

1816	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1815	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1817	**Island-Cut Through**	**S**	**Compliant Curb Ramp**

1284 Howard Rd and **Spring Ave**

1756	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1755	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1757	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1758	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1138 Howard Rd and **Westberry Bvd**

1839	**Pedestrian Pad**	**NE**	**Detectable Warning Surface**
1842	**Pedestrian Pad**	**NW**	**Detectable Warning Surface**
1840	**Pedestrian Pad**	**SE**	**Detectable Warning Surface**
1841	**Pedestrian Pad**	**SW**	**Detectable Warning Surface**

1003 Howard Rd and **Williams Ave**

2709	**Perpendicular**	**ESE**	**Ramp Transition**
2710	**Parallel**	**NE**	**Ramp Cross Slope**
2711	**Perpendicular**	**NW**	**Ramp Landing**
2708	**Parallel**	**SSE**	**Access Route**
2707	**Parallel**	**SW**	**Access Route**

Hull Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1261 Hull Ave and **A St**

3420	**Parallel**	**NE**	**Ramp Cross Slope**
3423	**Parallel**	**NW**	**Ramp Cross Slope**
3421	**Parallel**	**SE**	**Ramp Landing**
3422	**Parallel**	**SW**	**Ramp Landing**

759 Hull Ave and **Lake St**

3362	**Perpendicular**	**NW**	**Ramp Slope**
3361	**Curb Ramp Required**	**SE**	**Access Route**
3360	**Perpendicular**	**SW**	**Ramp Slope**

758 Hull Ave and **Sunrise Ave**

3331	**Curb Ramp Required**	**NE**	**Access Route**
3330	**Perpendicular**	**SE**	**Ramp Slope**
3332	**Perpendicular**	**SW**	**Ramp Landing**

Imperial Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

701 Imperial Dr and **University Ave**

703	**Perpendicular**	**NE**	**Ramp Landing**
702	**Curb Ramp Required**	**S**	**Access Route**

Independence Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1548 Independence Dr and			
2810	**Parallel**	**NE**	**Detectable Warning Surface**
2811	**Parallel**	**NW**	**Detectable Warning Surface**
2812	**Curb Ramp Required**	**SW**	**Access Route**

Independence Drive

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
318 Independence Drive and **Pine St**			
2808	**Perpendicular**	**NE**	**Gutter**
2807	**Perpendicular**	**NNW**	**Gutter**
2809	**Perpendicular**	**SE**	**Detectable Warning Surface**
2805	**Perpendicular**	**SSW**	**Ramp Landing**
2806	**Perpendicular**	**WNW**	**Detectable Warning Surface**
2804	**Perpendicular**	**WSW**	**Gutter**
319 Independence Drive and **Victory Lane**			
2815	**Curb Ramp Required**	**NW**	**Access Route**
2813	**Perpendicular**	**SE**	**Gutter**
2814	**Perpendicular**	**SW**	**Detectable Warning Surface**

Indigo Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
121 Indigo Dr and **Sepia Ct**			
4434	**Parallel**	**E**	**Ramp Cross Slope**
4436	**Perpendicular**	**NW**	**Ramp Landing**
4435	**Perpendicular**	**SW**	**Ramp Landing**

Industrial Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
891 Industrial Ave and **Commerce Dr**			
1909	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1908	**Perpendicular**	**SE**	**Ramp Landing**
1907	**Under Construction**	**SW**	**Existing Curb Ramp**

Ironwood Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1260 Ironwood Way and **Foxglove Way**			

2425	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2427	**Perpendicular**	**SE**	**Ramp Slope**
2426	**Perpendicular**	**SW**	**Ramp Slope**

Ivy Glen Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
182 Ivy Glen Dr and **Bolinas Way**			
2785	**Perpendicular**	**NE**	**Ramp Width**
2787	**Perpendicular**	**NW**	**Ramp Transition**
2786	**Curb Ramp Required**	**SE**	**Access Route**
181 Ivy Glen Dr and **Diamante Ln**			
2782	**Perpendicular**	**NE**	**Gutter**
2783	**Perpendicular**	**NW**	**Ramp Width**
2784	**Curb Ramp Required**	**SW**	**Access Route**

James Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
731 James Way and **Austin Ave**			
3965	**Curb Ramp Required**	**E**	**Access Route**
3961	**Perpendicular**	**NE**	**Ramp Width**
3964	**Perpendicular**	**NW**	**Ramp Landing**
3963	**Perpendicular**	**SE**	**Ramp Landing**
3966	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
3962	**Curb Ramp Required**	**W**	**Access Route**
38 James Way and **Dellavalle Ave**			
3972	**Curb Ramp Required**	**N**	**Access Route**
3970	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3971	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
40 James Way and **N D St**			
3978	**Perpendicular**	**NE**	**Ramp Landing**
3976	**Perpendicular**	**SE**	**Ramp Slope**
3977	**Curb Ramp Required**	**W**	**Access Route**
39 James Way and **Nebraska Ave**			
3975	**Curb Ramp Required**	**N**	**Access Route**
3973	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3974	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Jefferson Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1126 Jefferson Ave and **Arthur Ct**			
726	**Perpendicular**	**NE**	**Ramp Slope**

725	Perpendicular	NW	Ramp Slope
724	Curb Ramp Required	S	Access Route

1133 Jefferson Ave and **Central Pl**

843	Perpendicular	NE	Detectable Warnings
844	Perpendicular	NW	Ramp Landing
842	Curb Ramp Required	S	Access Route

1200 Jefferson Ave and **Jackson Ct**

732	Perpendicular	NE	Ramp Landing
731	Perpendicular	NW	Ramp Slope
730	Curb Ramp Required	S	Access Route

1400 Jefferson Ave and **Orchard Ave**

734	Perpendicular	NE	Ramp Landing
733	Perpendicular	NW	Ramp Slope
735	Perpendicular	SE	Ramp Slope
736	Perpendicular	SW	Ramp Slope

1056 Jefferson Ave and **Williams Ave**

845	Curb Ramp Required	N	Access Route
846	Perpendicular	SE	Ramp Landing
847	Perpendicular	SW	Ramp Slope

Jennings St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1265 Jennings St and **Fairview Ave**

472	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
471	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
469	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
470	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route

938 Jennings St and **Pine St**

462	Driveway	E	Pedestrian Access Route
464	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
463	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route

1264 Jennings St and **Rotan Ave**

468	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
467	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
465	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
466	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route

1135 Jennings St and **Schnoor Ave**

596	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
595	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
594	No Sidewalk, Curb Ramp Not Required	W	Pedestrian Access Route

1396 Jennings St and **Willis Ave**

476	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
475	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route

473	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
474	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Jonathan Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1069 Jonathan Way and **Stephanie Ln**			
2496	**Perpendicular**	**NE**	**Ramp Transition**
2494	**Perpendicular**	**SE**	**Detectable Warning Surface**
2495	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Joseph Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
106 Joseph Ln and **Sonora St**			
3921	**Curb Ramp Required**	**E**	**Access Route**
3922	**Perpendicular**	**NW**	**Ramp Landing**
3920	**Perpendicular**	**SW**	**Ramp Flare**

Josephine Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
590 Josephine Ct and **Jericho Dr**			
2048	**Curb Ramp Required**	**N**	**Access Route**
2050	**Perpendicular**	**SE**	**Gutter**
2049	**Perpendicular**	**SW**	**Ramp Slope**

Joy St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1143 Joy St and **Riverview Dr**			
891	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
889	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
890	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Judith Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1317 Judith Ct and **Stephanie Ln**			
2528	**Perpendicular**	**NE**	**Ramp Slope**
2527	**Perpendicular**	**NW**	**Ramp Slope**
2525	**Perpendicular**	**SE**	**Ramp Slope**
2526	**Perpendicular**	**SW**	**Gutter**

Judith Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
947 Judith Way and Arbella Ln			
2506	**Curb Ramp Required**	**NE**	**Access Route**
2507	**Perpendicular**	**NW**	**Gutter**
2508	**Perpendicular**	**SW**	**Ramp Slope**

Kathryn Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
614 Kathryn Ave and Anna Ave			
2079	**Perpendicular**	**NE**	**Ramp Landing**
2080	**Perpendicular**	**NW**	**Gutter**
2078	**Curb Ramp Required**	**S**	**Access Route**

Kent Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
791 Kent Dr and Cambria Ave			
1613	**Perpendicular**	**NE**	**Ramp Landing**
1614	**Perpendicular**	**NW**	**Ramp Landing**
1612	**Curb Ramp Required**	**S**	**Access Route**
792 Kent Dr and Diane Way			
1617	**Perpendicular**	**NE**	**Detectable Warnings**
1616	**Perpendicular**	**SE**	**Ramp Landing**
1615	**Curb Ramp Required**	**W**	**Access Route**
678 Kent Dr and Summer Ln			
1697	**Perpendicular**	**NE**	**Ramp Landing**
1698	**Perpendicular**	**SE**	**Ramp Landing**
1696	**Curb Ramp Required**	**W**	**Access Route**

Kimberley Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
334 Kimberley Ln and Alexis Way			
2950	**Perpendicular**	**NE**	**Ramp Slope**
2948	**Perpendicular**	**NW**	**Ramp Slope**
2949	**Curb Ramp Required**	**SW**	**Access Route**
1556 Kimberley Ln and Tevin Way			
2951	**Perpendicular**	**NW**	**Ramp Slope**
2952	**Curb Ramp Required**	**SE**	**Access Route**

Kimberly Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
511 Kimberly Dr and Deborah Ln			
2394	**Curb Ramp Required**	**NE**	**Access Route**
2395	**Perpendicular**	**NW**	**Ramp Slope**
2396	**Perpendicular**	**SW**	**Gutter**
512 Kimberly Dr and Taylor Lane			
2397	**Perpendicular**	**NE**	**Ramp Landing**
2400	**Perpendicular**	**NW**	**Ramp Slope**
2398	**Perpendicular**	**SE**	**Ramp Transition**
2399	**Perpendicular**	**SW**	**Ramp Slope**

Kimmel Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1015 Kimmel Ave and Kent Dr			
1553	**Perpendicular**	**NE**	**Ramp Slope**
1552	**Perpendicular**	**SE**	**Ramp Landing**
1551	**Curb Ramp Required**	**W**	**Access Route**
1016 Kimmel Ave and Westberry Dr			
1533	**Perpendicular**	**NE**	**Ramp Landing**
1532	**Perpendicular**	**NW**	**Ramp Slope**
1534	**Perpendicular**	**SE**	**Ramp Landing**
1531	**Perpendicular**	**SW**	**Ramp Landing**
1393 Kimmel Ave and Zak Way			
1542	**Perpendicular**	**NE**	**Ramp Landing**
1543	**Perpendicular**	**NW**	**Gutter**
1541	**Perpendicular**	**SE**	**Ramp Slope**
1544	**Perpendicular**	**SW**	**Gutter**

Kiwi St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
717 Kiwi St and E Almond Ave			
3525	**Perpendicular**	**NE**	**Ramp Slope**
3524	**Perpendicular**	**NW**	**Ramp Width**
3526	**Perpendicular**	**SE**	**Ramp Width**
3523	**Perpendicular**	**SW**	**Ramp Slope**
1594 Kiwi St and Mandarin St			
3532	**Curb Ramp Required**	**NE**	**Access Route**
3531	**Parallel**	**SW**	**Ramp Landing**

Knox Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1206 Knox Ave and Carry Ave			
3319	**Perpendicular**	**NE**	**Ramp Slope**
3317	**Perpendicular**	**SE**	**Ramp Slope**
3318	**Curb Ramp Required**	**SW**	**Access Route**
1022 Knox Ave and Lilly St			
3316	**Perpendicular**	**NE**	**Ramp Slope**
3314	**Perpendicular**	**SE**	**Ramp Slope**
3315	**Curb Ramp Required**	**SW**	**Access Route**

Knox Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
135 Knox Ct and A St			
3413	**Curb Ramp Required**	**NW**	**Access Route**
3411	**Perpendicular**	**SE**	**Ramp Slope**
3412	**Perpendicular**	**SW**	**Ramp Slope**

Knox St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
116 Knox St and Cherry St			
3496	**Curb Ramp Required**	**NE**	**Access Route**
3495	**Perpendicular**	**NW**	**Ramp Width**
3494	**Perpendicular**	**SW**	**Gutter**
835 Knox St and E Almond Ave			
3507	**Perpendicular**	**NE**	**Ramp Slope**
3508	**Perpendicular**	**SE**	**Ramp Slope**
3509	**Curb Ramp Required**	**SW**	**Access Route**
115 Knox St and Los Arcos Ln			
3148	**Curb Ramp Required**	**NE**	**Access Route**
3149	**Perpendicular**	**NW**	**Ramp Width**
3150	**Perpendicular**	**SW**	**Ramp Slope**
117 Knox St and Nectarine St			
3504	**Perpendicular**	**NW**	**Ramp Width**
3506	**Curb Ramp Required**	**SE**	**Access Route**
3505	**Parallel**	**SW**	**Ramp Slope**
118 Knox St and Neplus Way			
3105	**Perpendicular**	**NW**	**Ramp Slope**
3107	**Curb Ramp Required**	**SE**	**Access Route**
3106	**Perpendicular**	**SW**	**Ramp Width**

1318 Knox St and **Olive Ave**

3102	**Perpendicular**	**NE**	**Gutter**
3101	**Perpendicular**	**NW**	**Ramp Slope**
3103	**Perpendicular**	**SE**	**Gutter**
3104	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1606 Knox St and **Ortega Dr**

3126	**Perpendicular**	**NE**	**Ramp Width**
3127	**Perpendicular**	**SE**	**Ramp Width**
3128	**Curb Ramp Required**	**SW**	**Access Route**

1591 Knox St and **Ortega St**

3145	**Perpendicular**	**NE**	**Ramp Landing**
3146	**Curb Ramp Required**	**NW**	**Access Route**
3147	**Perpendicular**	**SE**	**Gutter**

1574 Knox St and **Pomegranate St**

3493	**Perpendicular**	**NE**	**Ramp Width**
3491	**Perpendicular**	**SE**	**Ramp Width**
3492	**Curb Ramp Required**	**SW**	**Access Route**

Koufax Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1580 Koufax Dr and **Drysdale Way**

3296	**Curb Ramp Required**	**N**	**Access Route**
3295	**Perpendicular**	**S**	**Gutter**

282 Koufax Dr and **Lilly St**

3297	**Perpendicular**	**E**	**Gutter**
3298	**Perpendicular**	**S**	**Gutter**
3299	**Curb Ramp Required**	**W**	**Access Route**

La Jolla Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1116 La Jolla Way and **Briquel Ave**

2069	**Curb Ramp Required**	**N**	**Access Route**
2070	**Perpendicular**	**SE**	**Ramp Landing**
2071	**Perpendicular**	**SW**	**Ramp Slope**

1463 La Jolla Way and **Talise Ave**

2067	**Perpendicular**	**NE**	**Ramp Slope**
2068	**Perpendicular**	**NW**	**Ramp Slope**
2066	**Curb Ramp Required**	**S**	**Access Route**

398 La Jolla Way and **Zapata St**

2058	**Perpendicular**	**NE**	**Ramp Slope**
2059	**Perpendicular**	**NW**	**Gutter**

2057	**Curb Ramp Required**	**S**	**Access Route**

La Perla Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1577 La Perla Ln and Las Fresas Way			
3171	**Curb Ramp Required**	**NE**	**Access Route**
3170	**Perpendicular**	**SW**	**Ramp Slope**
368 La Perla Ln and Varbella Pk			
3172	**Perpendicular**	**NE**	**Ramp Slope**
3173	**Perpendicular**	**SE**	**Gutter**
3174	**Curb Ramp Required**	**SW**	**Access Route**

La Quinta Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1587 La Quinta Way and San Gabriel Dr			
3467	**Perpendicular**	**NW**	**Gutter**
3468	**Curb Ramp Required**	**SW**	**Access Route**

Lacreta Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1520 Lacreta Ave and Amy Ave			
2086	**Perpendicular**	**NE**	**Ramp Landing**
2085	**Perpendicular**	**NW**	**Ramp Landing**
2084	**Curb Ramp Required**	**S**	**Access Route**
1519 Lacreta Ave and Dominguez Dr			
2024	**Perpendicular**	**NE**	**Ramp Slope**
2023	**Perpendicular**	**NW**	**Ramp Slope**
2022	**Curb Ramp Required**	**S**	**Access Route**
634 Lacreta Ave and Jericho Dr			
2025	**Curb Ramp Required**	**N**	**Access Route**
2027	**Perpendicular**	**SE**	**Gutter**
2026	**Perpendicular**	**SW**	**Ramp Landing**
633 Lacreta Ave and Jesse Dr			
2087	**Curb Ramp Required**	**N**	**Access Route**
2089	**Perpendicular**	**SE**	**Ramp Slope**
2088	**Perpendicular**	**SW**	**Ramp Slope**
632 Lacreta Ave and Merced St			
2110	**Perpendicular**	**NNW**	**Gutter**
2109	**Perpendicular**	**NW**	**Ramp Slope**
2108	**Perpendicular**	**SE**	**Ramp Landing**
2107	**Perpendicular**	**SSE**	**Ramp Slope**

Laguna Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
301 Laguna Way and Alicante Way			
2188	**Perpendicular**	**NE**	**Ramp Landing**
2189	**Perpendicular**	**NW**	**Ramp Slope**
2187	**Curb Ramp Required**	**S**	**Access Route**
298 Laguna Way and Barcelona Way			
2191	**Perpendicular**	**NE**	**Ramp Slope**
2192	**Perpendicular**	**NW**	**Ramp Slope**
2190	**Curb Ramp Required**	**S**	**Access Route**
299 Laguna Way and San Sebastian Way			
2182	**Perpendicular**	**NE**	**Ramp Landing**
2183	**Perpendicular**	**NW**	**Ramp Landing**
2181	**Curb Ramp Required**	**S**	**Access Route**
300 Laguna Way and Toluca			
2185	**Perpendicular**	**NE**	**Ramp Slope**
2186	**Perpendicular**	**NW**	**Ramp Landing**
2184	**Curb Ramp Required**	**S**	**Access Route**

Lake St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1456 Lake St and Lake St			
3359	**Perpendicular**	**NE**	**Ramp Landing**
3356	**Perpendicular**	**NW**	**Ramp Slope**
3358	**Perpendicular**	**SE**	**Gutter**
3357	**Parallel**	**SW**	**Ramp Cross Slope**

Lansing St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1132 Lansing St and Shannon Ave			
573	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
572	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
574	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1302 Lansing St and Westberry Bvd			
1455	**Perpendicular**	**NE**	**Ramp Slope**
1454	**Perpendicular**	**NW**	**Ramp Slope**
1456	**Perpendicular**	**SE**	**Ramp Slope**
1453	**Perpendicular**	**SW**	**Ramp Slope**

Larrete Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
359 Larrete Ave and Fairfield Way			
2360	**Perpendicular**	**NE**	**Ramp Transition**
2358	**Perpendicular**	**NW**	**Ramp Slope**
2359	**Curb Ramp Required**	**SW**	**Access Route**
358 Larrete Ave and Fairway Ave			
2296	**Curb Ramp Required**	**NW**	**Access Route**
2294	**Perpendicular**	**SE**	**Ramp Transition**
2295	**Perpendicular**	**SW**	**Ramp Slope**

Las Fresas Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
696 Las Fresas Way and Las Casas Ln			
3169	**Curb Ramp Required**	**NE**	**Access Route**
3168	**Perpendicular**	**NW**	**Ramp Slope**
3167	**Perpendicular**	**SW**	**Ramp Slope**

Laurel St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
139 Laurel St and Sunset Ave			
1678	**Perpendicular**	**NE**	**Ramp Slope**
1677	**Perpendicular**	**NW**	**Ramp Landing**
1676	**Curb Ramp Required**	**S**	**Access Route**

Lemon Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1467 Lemon Ave and			
3772	**Perpendicular**	**E**	**Gutter**
3771	**Perpendicular**	**N**	**Gutter**
3773	**Curb Ramp Required**	**S**	**Access Route**

Lemon Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1533 Lemon Tree Dr and Pear Tree Dr			
2652	**Perpendicular**	**NW**	**Ramp Landing**
2653	**Curb Ramp Required**	**SE**	**Access Route**
16 Lemon Tree Dr and W Almond Ave			

2655	**Curb Ramp Required**	**NW**	**Access Route**
2656	**Perpendicular**	**SE**	**Ramp Landing**
2654	**Perpendicular**	**SW**	**Ramp Transition**

Liberty Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1040 Liberty Ln and **State St**			
1390	**Perpendicular**	**NE**	**Ramp Slope**
1391	**Combination**	**S**	**Ramp Slope**
1392	**Perpendicular**	**SW**	**Ramp Slope**

Lighthouse Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
288 Lighthouse Dr and **Harbor Dr**			
677	**Curb Ramp Required**	**N**	**Access Route**
678	**Perpendicular**	**SE**	**Ramp Landing**
679	**Perpendicular**	**SW**	**Ramp Landing**
290 Lighthouse Dr and **Mainberry Dr**			
648	**Perpendicular**	**NE**	**Ramp Landing**
646	**Perpendicular**	**NW**	**Ramp Landing**
647	**Curb Ramp Required**	**S**	**Access Route**

Lillian St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1006 Lillian St and **Riverview Dr**			
888	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
886	**Curb Ramp Required**	**SE**	**Access Route**
887	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Lilly St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1581 Lilly St and			
3313	**Perpendicular**	**NE**	**Gutter**
3312	**Perpendicular**	**NW**	**Ramp Slope**
936 Lilly St and **Carry Ave**			
3310	**Curb Ramp Required**	**NE**	**Access Route**
3309	**Perpendicular**	**NW**	**Ramp Slope**
3311	**Perpendicular**	**SW**	**Ramp Slope**
1254 Lilly St and **Cross St**			
3262	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**

3263	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3261	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

60 Lilly St and **Koufax Dr**

3301	**Perpendicular**	**E**	**Gutter**
3300	**Perpendicular**	**N**	**Gutter**
3302	**Curb Ramp Required**	**S**	**Access Route**

745 Lilly St and **Sawmill St**

3365	**Perpendicular**	**E**	**Ramp Slope**
3364	**Perpendicular**	**S**	**Gutter**
3366	**Perpendicular**	**SW**	**Ramp Slope**
3363	**Perpendicular**	**W**	**Gutter**

744 Lilly St and **Sunrise Ave**

3306	**Perpendicular**	**NE**	**Gutter**
3307	**Perpendicular**	**NW**	**Ramp Slope**
3308	**Curb Ramp Required**	**SW**	**Access Route**

Lime Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

407 Lime Ave and **Georgia Ave**

3753	**Curb Ramp Required**	**E**	**Access Route**
3752	**Perpendicular**	**N**	**Ramp Landing**
3751	**Perpendicular**	**W**	**Ramp Slope**

1469 Lime Ave and **Mango Ave**

3756	**Perpendicular**	**NE**	**Gutter**
3754	**Perpendicular**	**NW**	**Gutter**
3755	**Curb Ramp Required**	**SW**	**Access Route**

408 Lime Ave and **San Bruno Ave**

3769	**Curb Ramp Required**	**N**	**Access Route**
3770	**Perpendicular**	**S**	**Detectable Warnings**
3768	**Perpendicular**	**W**	**Gutter**

Loma Linda Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

806 Loma Linda Ln and **Corona Dr**

3446	**Curb Ramp Required**	**NE**	**Access Route**
3445	**Perpendicular**	**SE**	**Ramp Slope**
3444	**Perpendicular**	**SW**	**Detectable Warnings**

100 Loma Linda Ln and **Rancho Santa Fe Dr**

3443	**Curb Ramp Required**	**NE**	**Access Route**
3442	**Perpendicular**	**SE**	**Ramp Width**
3441	**Perpendicular**	**SW**	**Gutter**

Los Arcos Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
219 Los Arcos Ln and Las Fresas Way			
3164	**Perpendicular**	**NE**	**Ramp Slope**
3165	**Perpendicular**	**NW**	**Ramp Slope**
3166	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
218 Los Arcos Ln and Varbella Pk			
3178	**Perpendicular**	**NE**	**Ramp Landing**
3179	**Curb Ramp Required**	**SW**	**Access Route**

Los Cerritos Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1568 Los Cerritos Way and Ardilla Dr			
3099	**Perpendicular**	**NE**	**Ramp Slope**
3100	**Curb Ramp Required**	**SW**	**Access Route**
1567 Los Cerritos Way and Oso Dr			
3097	**Perpendicular**	**SE**	**Ramp Landing**
3098	**Curb Ramp Required**	**SW**	**Access Route**

Lucia Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
391 Lucia Way and Asti Way			
3899	**Perpendicular**	**NE**	**Ramp Slope**
3900	**Perpendicular**	**SE**	**Ramp Slope**
3898	**Curb Ramp Required**	**W**	**Access Route**
390 Lucia Way and Gabriel Way			
3901	**Perpendicular**	**NE**	**Ramp Slope**
3902	**Curb Ramp Required**	**S**	**Access Route**

Lynmarie Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1555 Lynmarie Way and Kimberley Ln			
2946	**Perpendicular**	**NE**	**Ramp Slope**
2947	**Curb Ramp Required**	**SE**	**Access Route**

Lynn Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

937 Lynn Way and **Lucia Way**

3896	**Curb Ramp Required**	**N**	**Access Route**
3897	**Perpendicular**	**SE**	**Ramp Landing**
3895	**Perpendicular**	**SW**	**Ramp Landing**

650 Lynn Way and **Sonora St**

3891	**Perpendicular**	**NE**	**Ramp Landing**
3890	**Perpendicular**	**SE**	**Ramp Landing**
3889	**Curb Ramp Required**	**W**	**Access Route**

Lyons St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1384 Lyons St and **5Th St**

4193	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4191	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4192	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
4194	**Perpendicular**	**W**	**Ramp Landing**

Macadamia Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1557 Macadamia Ave and

2958	**Perpendicular**	**NW**	**Gutter**
2957	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2956	**Perpendicular**	**SW**	**Gutter**

169 Macadamia Ave and **Alexis Way**

2961	**Curb Ramp Required**	**NW**	**Access Route**
2959	**Perpendicular**	**SE**	**Gutter**
2960	**Perpendicular**	**SW**	**Ramp Landing**

168 Macadamia Ave and **Chestnut Ave**

2941	**Curb Ramp Required**	**NW**	**Ramp Landing**
2942	**Perpendicular**	**SE**	**Ramp Slope**
2940	**Perpendicular**	**SW**	**Ramp Transition**

166 Macadamia Ave and **Lynmarie Way**

2944	**Curb Ramp Required**	**NW**	**Access Route**
2945	**Perpendicular**	**SE**	**Ramp Slope**
2943	**Perpendicular**	**SW**	**Ramp Slope**

167 Macadamia Ave and **Tevin Way**

2954	**Curb Ramp Required**	**NE**	**Access Route**
2953	**Perpendicular**	**SE**	**Ramp Slope**
2955	**Perpendicular**	**SW**	**Ramp Slope**

Madera Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
868 Madera Ave and 10Th St			
4234	**Perpendicular**	**NE**	**Ramp Landing**
4233	**Perpendicular**	**SE**	**Ramp Landing**
4232	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
834 Madera Ave and De Santi Ave			
3575	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3573	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3574	**Curb Ramp Required**	**SW**	**Access Route**
1145 Madera Ave and Lewis St			
17	**Curb Ramp Required**	**E**	**Access Route**
16	**Parallel**	**N**	**Ramp Cross Slope**
3580	**Parallel**	**NE**	**Ramp Landing**
3581	**Curb Ramp Required**	**NW**	**Access Route**
18	**Parallel**	**S**	**Ramp Landing**
3579	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Madison Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
479 Madison Dr and Hoover Ave			
1960	**Perpendicular**	**NE**	**Ramp Slope**
1961	**Perpendicular**	**SE**	**Ramp Slope**
1959	**Curb Ramp Required**	**W**	**Access Route**
480 Madison Dr and Josephine Ct			
2039	**Curb Ramp Required**	**E**	**Access Route**
2040	**Perpendicular**	**NW**	**Ramp Width**
2041	**Perpendicular**	**SW**	**Ramp Slope**
481 Madison Dr and Lacreta Ave			
1957	**Curb Ramp Required**	**E**	**Access Route**
1956	**Perpendicular**	**NW**	**Ramp Landing**
1958	**Perpendicular**	**SW**	**Ramp Slope**

Madrid Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1506 Madrid Ln and			
291	**Curb Ramp Required**	**NE**	**Access Route**
290	**Perpendicular**	**SW**	**Ramp Landing**
1067 Madrid Ln and Seneca Ave			
292	**Curb Ramp Required**	**N**	**Access Route**

293	**Perpendicular**	**SE**	**Ramp Landing**
294	**Perpendicular**	**SW**	**Ramp Slope**

Magnolia St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1402 Magnolia St and **6Th St**			
3241	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3242	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3240	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3243	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
1401 Magnolia St and **Cross St**			
3237	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3238	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3236	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3239	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Mainberry Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
779 Mainberry Dr and **Camden Way**			
661	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
662	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
660	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
450 Mainberry Dr and **Howard Rd**			
1725	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1728	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1726	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1727	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1152 Mainberry Dr and **Lansing St**			
1722	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1716	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1724	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1717	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1723	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1718	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
272 Mainberry Dr and **Lighthouse Ct**			
651	**Perpendicular**	**N**	**Ramp Landing**
650	**Perpendicular**	**SE**	**Ramp Landing**
649	**Perpendicular**	**SW**	**Ramp Landing**
1291 Mainberry Dr and **National Ave**			
663	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
665	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
664	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

666	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1292 Mainberry Dr and **Third St**

1713	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1712	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1715	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1714	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Majestic Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

901 Majestic Way and **Gary Ln**

2913	**Perpendicular**	**NE**	**Gutter**
2916	**Perpendicular**	**NW**	**Gutter**
2914	**Perpendicular**	**SE**	**Ramp Transition**
2915	**Perpendicular**	**SW**	**Ramp Slope**

Makenna Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

557 Makenna Dr and **Eagle Way**

1828	**Perpendicular**	**NE**	**Ramp Slope**
1827	**Perpendicular**	**SE**	**Ramp Landing**
1826	**Curb Ramp Required**	**W**	**Access Route**

476 Makenna Dr and **Maple St**

1891	**Perpendicular**	**NE**	**Gutter**
1892	**Perpendicular**	**NW**	**Ramp Landing**
1894	**Perpendicular**	**SE**	**Ramp Landing**
1893	**Perpendicular**	**SW**	**Ramp Landing**

556 Makenna Dr and **Oak St**

1835	**Perpendicular**	**NE**	**Ramp Landing**
1833	**Perpendicular**	**NW**	**Ramp Landing**
1834	**Curb Ramp Required**	**S**	**Access Route**

477 Makenna Dr and **Plumas St**

1889	**Curb Ramp Required**	**NW**	**Access Route**
1890	**Perpendicular**	**SE**	**Ramp Slope**

Malta Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

92 Malta Ave and **E Cleveland Ave**

4053	**Parallel**	**NE**	**Ramp Cross Slope**
4054	**Parallel**	**NW**	**Ramp Cross Slope**
4052	**Curb Ramp Required**	**S**	**Access Route**

93 Malta Ave and **Mission Ave**

2215	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2217	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2216	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Mandana Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
498 Mandana Way and **Fairway Ave**			
2290	**Curb Ramp Required**	**NW**	**Access Route**
2288	**Perpendicular**	**SE**	**Gutter**
2289	**Perpendicular**	**SW**	**Ramp Slope**
499 Mandana Way and **Mateo Way**			
2286	**Perpendicular**	**NE**	**Ramp Width**
2287	**Curb Ramp Required**	**SE**	**Access Route**

Mango Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1468 Mango Ave and **Lemon Ave**			
3757	**Perpendicular**	**NW**	**Ramp Transition**
3759	**Curb Ramp Required**	**SE**	**Access Route**
3758	**Perpendicular**	**SW**	**Ramp Slope**
1502 Mango Ave and **Raymond Thomas St**			
3743	**Perpendicular**	**NE**	**Ramp Slope**
3744	**Perpendicular**	**SE**	**Ramp Landing**
3745	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Manresa Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
418 Manresa Dr and **Asilomar Dr**			
1797	**Perpendicular**	**NE**	**Ramp Landing**
1798	**Perpendicular**	**SE**	**Ramp Landing**
1799	**Curb Ramp Required**	**W**	**Access Route**
417 Manresa Dr and **Santa Lucia Dr**			
1779	**Curb Ramp Required**	**E**	**Access Route**
1780	**Perpendicular**	**NW**	**Ramp Landing**
1781	**Perpendicular**	**SW**	**Ramp Landing**

Manzana Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
83 Manzana Ct and **Avila Way**			
3198	**Curb Ramp Required**	**E**	**Access Route**

3196	**Perpendicular**	**S**	**Gutter**
3197	**Perpendicular**	**W**	**Gutter**

82 Manzana Ct and **Clinton St**

3201	**Perpendicular**	**E**	**Gutter**
3199	**Perpendicular**	**S**	**Gutter**
3200	**Curb Ramp Required**	**W**	**Access Route**

Maple St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1274 Maple St and **Cortopassi St**

3556	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3557	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3559	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3558	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1174 Maple St and **Cypress St**

2745	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2744	**Perpendicular**	**NW**	**Ramp Slope**
2746	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1339 Maple St and **Grove St**

2755	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2754	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2753	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

833 Maple St and **Madera Ave**

3585	**Curb Ramp Required**	**NW**	**Access Route**
3587	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3586	**Perpendicular**	**SW**	**Gutter**

94 Maple St and **Maple Ct**

383	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
384	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
385	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

725 Maple St and **Monterey St**

365	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
366	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
364	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
367	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1541 Maple St and **Noble St**

2751	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2752	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2750	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1219 Maple St and **Pine St**

2741	**Perpendicular**	**NE**	**Ramp Slope**
2742	**Perpendicular**	**SE**	**Gutter**
2743	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1348 Maple St and **Santa Clara**

381	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
382	**Parallel**	**NW**	**Ramp Landing**
380	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
379	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1349 Maple St and **Santa Cruz St**

376	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
377	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
375	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
378	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1306 Maple St and **Stadium Rd**

388	**Parallel**	**NE**	**Gutter**
387	**Parallel**	**NW**	**Ramp Landing**
389	**Perpendicular**	**SE**	**Gutter**
386	**Parallel**	**SW**	**Ramp Landing**

Marie Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

508 Marie Dr and **Glade Ave**

2405	**Perpendicular**	**NE**	**Ramp Slope**
2406	**Perpendicular**	**NW**	**Gutter**
2404	**Curb Ramp Required**	**SE**	**Access Route**

507 Marie Dr and **Taylor Lane**

2401	**Perpendicular**	**NE**	**Ramp Transition**
2402	**Curb Ramp Required**	**NW**	**Access Route**
2403	**Perpendicular**	**SW**	**Ramp Transition**

Marina Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

638 Marina Dr and **Asilomar Dr**

1803	**Perpendicular**	**NE**	**Ramp Slope**
1804	**Perpendicular**	**SE**	**Ramp Landing**
1805	**Curb Ramp Required**	**W**	**Access Route**

Mariposa St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

132 Mariposa St and **A St**

3404	**Parallel**	**NE**	**Pedestrian Access Route**
3402	**Perpendicular**	**SE**	**Ramp Slope**
3403	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

133 Mariposa St and **Dome Ave**

3400	**Perpendicular**	**NE**	**Gutter**
3401	**Curb Ramp Required**	**NW**	**Access Route**
3399	**Perpendicular**	**SE**	**Gutter**

588 Mariposa St and **Olive Ave**

3379	**Perpendicular**	**NE**	**Gutter**
3380	**Perpendicular**	**NW**	**Ramp Landing**
3381	**Curb Ramp Required**	**SW**	**Access Route**

1585 Mariposa St and **Oso Dr**

3440	**Curb Ramp Required**	**NE**	**Access Route**
3439	**Perpendicular**	**NW**	**Gutter**

Martin St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1429 Martin St and **Lewis St**

3547	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3546	**Perpendicular**	**NNW**	**Ramp Slope**
3548	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3549	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
3545	**Perpendicular**	**WNW**	**Ramp Slope**

Merced St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1462 Merced St and **Adell St**

2148	**Curb Ramp Required**	**E**	**Access Route**
2150	**Perpendicular**	**NW**	**Gutter**
2149	**Perpendicular**	**SW**	**Gutter**

270 Merced St and **Daulton Ave**

4081	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4080	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4082	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4083	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

267 Merced St and **E Cleveland Ave**

4188	**Curb Ramp Required**	**N**	**Access Route**
4184	**Parallel**	**NE**	**Ramp Cross Slope**
4182	**Parallel**	**NW**	**Ramp Cross Slope**
4183	**Curb Ramp Required**	**S**	**Access Route**
4190	**Parallel**	**SE**	**Ramp Cross Slope**
4189	**Parallel**	**SW**	**Ramp Slope**

269 Merced St and **E Lincoln Ave**

4102	**Perpendicular**	**NE**	**Ramp Landing**
4100	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4103	**Perpendicular**	**SE**	**Ramp Landing**

4101	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

268 Merced St and **E Riverside Dr**

4086	**Perpendicular**	**NE**	**Ramp Slope**
4084	**Perpendicular**	**NW**	**Detectable Warning Surface**
4085	**Curb Ramp Required**	**S**	**Access Route**

957 Merced St and **Grant Ave**

4125	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4124	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4122	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
4123	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

443 Merced St and **W Sherwood Way**

2254	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
2255	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2256	**Combination**	**SW**	**Ramp Width**

Merlot Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1223 Merlot Ave and **Barbera Ave**

2559	**Perpendicular**	**NE**	**Ramp Slope**
2558	**Perpendicular**	**NW**	**Ramp Slope**
2560	**Curb Ramp Required**	**SE**	**Access Route**

1224 Merlot Ave and **Chablis Ave**

2557	**Perpendicular**	**NE**	**Ramp Slope**
2556	**Perpendicular**	**NW**	**Ramp Slope**
2555	**Curb Ramp Required**	**SW**	**Access Route**

1107 Merlot Ave and **Granada Dr**

1922	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1921	**Perpendicular**	**NW**	**Ramp Slope**
1923	**Perpendicular**	**SW**	**Ramp Slope**

225 Merlot Ave and **S Timberline Dr**

2610	**Perpendicular**	**NE**	**Ramp Width**
2607	**Perpendicular**	**NW**	**Ramp Width**
2609	**Perpendicular**	**SE**	**Ramp Slope**
2608	**Perpendicular**	**SW**	**Ramp Slope**

224 Merlot Ave and **S Wolftrap St**

2612	**Curb Ramp Required**	**NE**	**Access Route**
2611	**Perpendicular**	**NW**	**Ramp Slope**
2613	**Perpendicular**	**SW**	**Ramp Landing**

226 Merlot Ave and **Westberry Bvd**

2577	**Perpendicular**	**NE**	**Ramp Slope**
2578	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2576	**Perpendicular**	**SE**	**Ramp Slope**

Michoacan Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1461 Michoacan Ct and Jericho Dr			
2042	**Curb Ramp Required**	**N**	**Access Route**
2047	**Perpendicular**	**NE**	**Ramp Slope**
2046	**Perpendicular**	**NW**	**Ramp Slope**
2045	**Curb Ramp Required**	**S**	**Access Route**
2044	**Perpendicular**	**SE**	**Ramp Slope**
2043	**Perpendicular**	**SW**	**Ramp Slope**

Milano Lane

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
77 Milano Lane and Lucca Court			
265	**Perpendicular**	**NE**	**Compliant Curb Ramp**
266	**Perpendicular**	**NW**	**Compliant Curb Ramp**
264	**Curb Ramp Required**	**S**	**Access Route**
201 Milano Lane and Monterey St			
251	**Curb Ramp Required**	**E**	**Access Route**
252	**Perpendicular**	**NW**	**Detectable Warning Surface**
253	**Perpendicular**	**SW**	**Detectable Warning Surface**
79 Milano Lane and Napoli St			
268	**Perpendicular**	**NE**	**Compliant Curb Ramp**
269	**Perpendicular**	**NW**	**Compliant Curb Ramp**
267	**Curb Ramp Required**	**S**	**Access Route**
78 Milano Lane and Pompei St			
257	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
256	**Perpendicular**	**NE**	**Gutter**
259	**Perpendicular**	**NW**	**Compliant Curb Ramp**
255	**Perpendicular**	**SE**	**Gutter**
258	**Perpendicular**	**SW**	**Ramp Landing**
254	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
81 Milano Lane and Roma Court			
260	**Perpendicular**	**NE**	**Gutter**
263	**Perpendicular**	**NW**	**Ramp Landing**
261	**Perpendicular**	**SE**	**Compliant Curb Ramp**
262	**Perpendicular**	**SW**	**Ramp Landing**
80 Milano Lane and Stadium Rd			
271	**Perpendicular**	**NE**	**Ramp Landing**
272	**Perpendicular**	**SE**	**Compliant Curb Ramp**
270	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Milow St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1575 Milow St and Fritz St			
3157	**Perpendicular**	**NW**	**Ramp Slope**
3158	**Curb Ramp Required**	**SE**	**Access Route**

Mission Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
599 Mission Ave and Kadota Ave			
2209	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2211	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2210	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Monarch Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
195 Monarch Rd and Dome Ave			
3397	**Curb Ramp Required**	**NE**	**Access Route**
3396	**Perpendicular**	**SE**	**Gutter**
3398	**Perpendicular**	**SW**	**Ramp Slope**

Monroe Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
75 Monroe Ave and Eisenhower Ln			
2034	**Curb Ramp Required**	**N**	**Access Route**
2035	**Perpendicular**	**SE**	**Ramp Slope**
2036	**Perpendicular**	**SW**	**Ramp Landing**
76 Monroe Ave and Hoover Ave			
1962	**Curb Ramp Required**	**N**	**Access Route**
1964	**Perpendicular**	**SE**	**Ramp Slope**
1963	**Perpendicular**	**SW**	**Ramp Landing**
73 Monroe Ave and Pierce Ln			
1935	**Perpendicular**	**NE**	**Ramp Width**
1934	**Perpendicular**	**NW**	**Ramp Width**
1933	**Curb Ramp Required**	**S**	**Access Route**
74 Monroe Ave and Tyler Ln			
1991	**Perpendicular**	**NE**	**Ramp Slope**
1992	**Perpendicular**	**NW**	**Gutter**
1990	**Curb Ramp Required**	**S**	**Access Route**

Monterey Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1047 Monterey Dr and Almond Ave			
340	**Parallel**	**NE**	**Ramp Landing**
341	**Perpendicular**	**NW**	**Ramp Slope**
339	**Perpendicular**	**SE**	**Ramp Slope**
338	**Perpendicular**	**SW**	**Ramp Slope**
326 Monterey Dr and Madrid Ln			
299	**Perpendicular**	**NE**	**Ramp Slope**
300	**Perpendicular**	**SE**	**Gutter**
298	**Curb Ramp Required**	**W**	**Access Route**
327 Monterey Dr and St Montelena Ct			
216	**Perpendicular**	**NE**	**Ramp Slope**
217	**Perpendicular**	**NW**	**Ramp Slope**
215	**Perpendicular**	**SE**	**Ramp Slope**
214	**Perpendicular**	**SW**	**Ramp Slope**

Monterey St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
325 Monterey St and Gary Ln			
301	**Perpendicular**	**NE**	**Ramp Slope**
302	**Perpendicular**	**NW**	**Ramp Slope**
304	**Perpendicular**	**SE**	**Ramp Slope**
303	**Perpendicular**	**SW**	**Ramp Transition**
1215 Monterey St and Lewis St			
3542	**Perpendicular**	**NE**	**Ramp Landing**
3543	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3544	**Perpendicular**	**SE**	**Ramp Landing**
959 Monterey St and Walnut St			
361	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
362	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
360	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
363	**Perpendicular**	**SW**	**Ramp Slope**

Moore Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1090 Moore Ave and S Lake St			
4295	**Perpendicular**	**E**	**Ramp Landing**
4296	**Perpendicular**	**N**	**Ramp Landing**
4297	**Perpendicular**	**S**	**Ramp Landing**

4298	**Perpendicular**	**W**	**Ramp Landing**

1089 Moore Ave and **Vineyard Ave**

3375	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3374	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3373	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Munras Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

640 Munras Ave and **San Marco Ave**

2841	**Curb Ramp Required**	**NE**	**Access Route**
2840	**Perpendicular**	**NW**	**Ramp Slope**
2842	**Perpendicular**	**SW**	**Ramp Slope**

N A St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1431 N A St and **5Th St**

4211	**Perpendicular**	**E**	**Ramp Slope**
4210	**Perpendicular**	**N**	**Ramp Landing**
4212	**Perpendicular**	**S**	**Ramp Slope**
4498	**Perpendicular**	**W**	**Ramp Landing**

N B St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1276 N B St and **3Rd St**

4368	**Perpendicular**	**E**	**Ramp Landing**
4369	**Perpendicular**	**N**	**Compliant Curb Ramp**
4371	**Perpendicular**	**S**	**Ramp Landing**
4370	**Perpendicular**	**W**	**Compliant Curb Ramp**

1277 N B St and **St 4Th**

4374	**Perpendicular**	**E**	**Ramp Slope**
4373	**Perpendicular**	**N**	**Ramp Landing**
4375	**Perpendicular**	**S**	**Gutter**
4372	**Perpendicular**	**W**	**Ramp Slope**

N C St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1443 N C St and **3Rd St**

3852	**Perpendicular**	**E**	**Ramp Slope**
3851	**Perpendicular**	**N**	**Ramp Slope**
3853	**Combination**	**S**	**Ramp Cross Slope**

3850	**Combination**	**W**	**Ramp Width**

N D St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1381 N D St and **1St St**			
3833	**Parallel**	**N**	**Gutter**
3832	**Curb Ramp Required**	**S**	**Access Route**
3831	**Perpendicular**	**W**	**Ramp Landing**
317 N D St and **3Rd St**			
1066	**Perpendicular**	**E**	**Ramp Landing**
1067	**Perpendicular**	**N**	**Ramp Slope**
1065	**Perpendicular**	**S**	**Ramp Landing**
1068	**Perpendicular**	**W**	**Ramp Landing**
1330 N D St and **5Th St**			
4474	**Perpendicular**	**E**	**Ramp Landing**
4473	**Perpendicular**	**N**	**Ramp Slope**
4475	**Perpendicular**	**S**	**Ramp Slope**
4476	**Combination**	**W**	**Ramp Cross Slope**
661 N D St and **E Lincoln Ave**			
1310	**Perpendicular**	**NE**	**Gutter**
1309	**Perpendicular**	**NW**	**Gutter**
1307	**Perpendicular**	**SE**	**Gutter**
1308	**Perpendicular**	**SW**	**Ramp Flare**
502 N D St and **E S St**			
1305	**Perpendicular**	**NE**	**Gutter**
1304	**Perpendicular**	**NW**	**Ramp Slope**
1306	**Perpendicular**	**SE**	**Gutter**
1303	**Perpendicular**	**SW**	**Clear Space**
662 N D St and **Riverside Dr**			
1299	**Perpendicular**	**NE**	**Ramp Landing**
1302	**Perpendicular**	**NW**	**Gutter**
1300	**Perpendicular**	**SE**	**Ramp Slope**
1301	**Perpendicular**	**SW**	**Ramp Slope**

N E St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1390 N E St and **3Rd St**			
1064	**Perpendicular**	**E**	**Ramp Slope**
1061	**Perpendicular**	**N**	**Compliant Curb Ramp**
1063	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1062	**Curb Ramp Required**	**W**	**Access Route**
917 N E St and **5Th St**			

4479	**Perpendicular**	**E**	**Ramp Slope**
4477	**Perpendicular**	**N**	**Ramp Landing**
4478	**Curb Ramp Required**	**SW**	**Access Route**

N G St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1207 N G St and **Fifth St**			
1092	**Perpendicular**	**E**	**Ramp Slope**
1091	**Perpendicular**	**N**	**Ramp Slope**
1093	**Combination**	**S**	**Compliant Curb Ramp**
1094	**Combination**	**W**	**Ramp Slope**
1290 N G St and **W 4Th St**			
1082	**Perpendicular**	**E**	**Ramp Landing**
1081	**Perpendicular**	**N**	**Ramp Landing**
1083	**Perpendicular**	**S**	**Gutter**
1084	**Perpendicular**	**W**	**Ramp Landing**

N Gateway Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1201 N Gateway Dr and **Fifth St**			
1099	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1101	**Perpendicular**	**S**	**Ramp Slope**
1100	**Perpendicular**	**W**	**Ramp Slope**
1078 N Gateway Dr and **W 1St St**			
1042	**Curb Ramp Required**	**NE**	**Access Route**
1043	**Perpendicular**	**S**	**Ramp Slope**
1044	**Perpendicular**	**W**	**Ramp Landing**
730 N Gateway Dr and **W 2Nd St**			
1039	**Parallel**	**NE**	**Gutter**
1040	**Perpendicular**	**S**	**Ramp Slope**
1041	**Perpendicular**	**W**	**Ramp Slope**
1280 N Gateway Dr and **W 3Rd St**			
1090	**Perpendicular**	**E**	**Ramp Width**
1089	**Perpendicular**	**N**	**Ramp Width**
1087	**Perpendicular**	**S**	**Ramp Landing**
1088	**Perpendicular**	**W**	**Ramp Slope**
1255 N Gateway Dr and **W Roberts Ave**			
1045	**Curb Ramp Required**	**NE**	**Access Route**
1046	**Perpendicular**	**S**	**Ramp Slope**
1047	**Perpendicular**	**W**	**Ramp Landing**

N Granada Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1483 N Granada Dr and Ave 16			
3803	**Curb Ramp Required**	**N**	**Access Route**
3804	**Perpendicular**	**SE**	**Ramp Landing**
3805	**Perpendicular**	**SW**	**Ramp Landing**
874 N Granada Dr and Balsam Ct			
1610	**Driveway**	**E**	**Pedestrian Access Route**
1609	**Perpendicular**	**NW**	**Ramp Landing**
1611	**Perpendicular**	**SW**	**Ramp Landing**
460 N Granada Dr and Deborah Ln			
2389	**Perpendicular**	**NW**	**Ramp Slope**
2387	**Curb Ramp Required**	**SE**	**Access Route**
2388	**Perpendicular**	**SW**	**Ramp Slope**
867 N Granada Dr and Greenwood Dr			
1567	**Curb Ramp Required**	**E**	**Access Route**
1568	**Perpendicular**	**NW**	**Ramp Slope**
1566	**Perpendicular**	**SW**	**Ramp Slope**
861 N Granada Dr and Monocott Dr			
1562	**Curb Ramp Required**	**E**	**Access Route**
1560	**Perpendicular**	**NW**	**Ramp Landing**
1561	**Perpendicular**	**SW**	**Ramp Slope**
459 N Granada Dr and Pamela Dr			
2383	**Perpendicular**	**NW**	**Ramp Slope**
2381	**Perpendicular**	**SE**	**Gutter**
2382	**Perpendicular**	**SW**	**Ramp Slope**
860 N Granada Dr and Sandlewood Dr			
1564	**Curb Ramp Required**	**E**	**Access Route**
1565	**Perpendicular**	**NW**	**Ramp Landing**
1563	**Perpendicular**	**SW**	**Ramp Slope**
461 N Granada Dr and Steeple Gate			
2385	**Perpendicular**	**NE**	**Ramp Slope**
2386	**Curb Ramp Required**	**NW**	**Access Route**
2384	**Perpendicular**	**SE**	**Ramp Slope**
772 N Granada Dr and Valley Way			
1605	**Perpendicular**	**NE**	**Ramp Landing**
1607	**Perpendicular**	**NW**	**Ramp Slope**
1608	**Perpendicular**	**SE**	**Ramp Landing**
1606	**Perpendicular**	**SW**	**Ramp Slope**

N I St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
399 N I St and 406 N I St			
997	**Curb Ramp Required**	**N**	**Access Route**
996	**Curb Ramp Required**	**S**	**Access Route**
1321 N I St and Fifth St			
171	**Perpendicular**	**E**	**Ramp Landing**
170	**Perpendicular**	**N**	**Ramp Landing**
172	**Perpendicular**	**S**	**Ramp Landing**
169	**Perpendicular**	**W**	**Ramp Flare**
1119 N I St and W 2Nd St			
995	**Perpendicular**	**E**	**Gutter**
993	**Perpendicular**	**N**	**Ramp Landing**
994	**Island-Cut Through**	**NE**	**Islands**
991	**Parallel**	**S**	**Ramp Cross Slope**
992	**Parallel**	**W**	**Ramp Slope**
1322 N I St and W 4Th St			
1001	**Perpendicular**	**E**	**Ramp Landing**
998	**Perpendicular**	**N**	**Ramp Landing**
999	**Perpendicular**	**S**	**Ramp Slope**
1000	**Perpendicular**	**W**	**Ramp Landing**
495 N I St and W Roberts Ave			
905	**Perpendicular**	**NW**	**Ramp Slope**
908	**Parallel**	**SE**	**Ramp Cross Slope**
907	**Perpendicular**	**SSW**	**Ramp Landing**
906	**Parallel**	**WSW**	**Ramp Landing**

N K St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1289 N K St and Fifth St			
176	**Perpendicular**	**E**	**Ramp Landing**
177	**Perpendicular**	**N**	**Ramp Landing**
179	**Perpendicular**	**S**	**Ramp Slope**
178	**Perpendicular**	**W**	**Ramp Landing**
1288 N K St and W Yosemite Ave			
98	**Combination**	**NE**	**Ramp Landing**
99	**Combination**	**NW**	**Ramp Landing**
97	**Combination**	**SE**	**Compliant Curb Ramp**
96	**Combination**	**SW**	**Ramp Landing**

N L St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
202 N L St and Third St			
977	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
978	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

N Lake St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1 N Lake St and Ashlan Way			
4006	**Combination**	**E**	**Compliant Curb Ramp**
4008	**Parallel**	**NE**	**Ramp Landing**
4007	**Perpendicular**	**NW**	**Ramp Landing**
4004	**Parallel**	**SE**	**Detectable Warning Surface**
4005	**Perpendicular**	**SW**	**Ramp Landing**
4003	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
606 N Lake St and Daulton Ave			
4075	**Perpendicular**	**NE**	**Ramp Landing**
4074	**Perpendicular**	**SE**	**Ramp Landing**
4073	**Curb Ramp Required**	**W**	**Access Route**
7 N Lake St and E Adell St			
2139	**Perpendicular**	**NE**	**Compliant Curb Ramp**
2140	**Perpendicular**	**NNW**	**Ramp Slope**
2141	**Perpendicular**	**NW**	**Gutter**
2144	**Perpendicular**	**SE**	**Gutter**
2143	**Perpendicular**	**SSE**	**Compliant Curb Ramp**
2142	**Perpendicular**	**SW**	**Compliant Curb Ramp**
11 N Lake St and E Clark St			
4444	**Curb Ramp Required**	**E**	**Access Route**
4011	**Perpendicular**	**NE**	**Ramp Landing**
4009	**Perpendicular**	**SE**	**Ramp Transition**
4443	**Driveway**	**W**	**Pedestrian Access Route**
10 N Lake St and E Kennedy St			
2146	**Perpendicular**	**NE**	**Ramp Slope**
2147	**Perpendicular**	**SE**	**Gutter**
2145	**Curb Ramp Required**	**W**	**Access Route**
605 N Lake St and E Lincoln Ave			
4139	**Perpendicular**	**NE**	**Ramp Landing**
4142	**Perpendicular**	**NW**	**Ramp Landing**
4140	**Perpendicular**	**SE**	**Ramp Landing**
4141	**Perpendicular**	**SW**	**Ramp Landing**
604 N Lake St and E Riverside Dr			

4064	**Perpendicular**	**NE**	**Ramp Landing**
4065	**Perpendicular**	**SE**	**Compliant Curb Ramp**
4066	**Curb Ramp Required**	**W**	**Access Route**

9 N Lake St and **Green Way**

4022	**Curb Ramp Required**	**E**	**Access Route**
4171	**Parallel**	**NE**	**Ramp Landing**
4020	**Perpendicular**	**NW**	**Ramp Slope**
4170	**Parallel**	**SE**	**Ramp Landing**
4021	**Perpendicular**	**SW**	**Gutter**
4169	**Curb Ramp Required**	**W**	**Access Route**

3 N Lake St and **James Way**

4000	**Curb Ramp Required**	**E**	**Access Route**
4002	**Perpendicular**	**NW**	**Detectable Warning Surface**
4001	**Perpendicular**	**SW**	**Detectable Warning Surface**

603 N Lake St and **Rush St**

4133	**Curb Ramp Required**	**E**	**Access Route**
4134	**Perpendicular**	**NW**	**Ramp Landing**
4135	**Perpendicular**	**SW**	**Ramp Landing**

6 N Lake St and **W Sherwood Way**

4016	**Parallel**	**NE**	**Detectable Warning Surface**
4019	**Perpendicular**	**NW**	**Ramp Landing**
4017	**Parallel**	**SE**	**Detectable Warning Surface**
4018	**Perpendicular**	**SW**	**Gutter**

707 N Lake St and **Wessmith Way**

4012	**Parallel**	**NE**	**Detectable Warning Surface**
4015	**Perpendicular**	**NW**	**Gutter**
4013	**Parallel**	**SE**	**Ramp Landing**
4014	**Perpendicular**	**SW**	**Detectable Warning Surface**

N M St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1151 N M St and **Third St**

975	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
976	**Perpendicular**	**SW**	**Ramp Flare**

N N St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1452 N N St and **Fourth St**

196	**Perpendicular**	**E**	**Ramp Landing**
195	**Perpendicular**	**N**	**Ramp Landing**
193	**Perpendicular**	**S**	**Ramp Landing**
194	**Perpendicular**	**W**	**Ramp Landing**

720 N N St and **Sunset Ave**

918	**Perpendicular**	**SE**	**Ramp Landing**
917	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1269 N N St and **Third St**

974	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
973	**Curb Ramp Required**	**N**	**Access Route**
971	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
972	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

N O St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1423 N O St and **Fourth St**

608	**Perpendicular**	**E**	**Detectable Warning Surface**
605	**Combination**	**N**	**Ramp Landing**
607	**Perpendicular**	**S**	**Compliant Curb Ramp**
606	**Perpendicular**	**W**	**Gutter**

819 N O St and **Pine St**

429	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
428	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
427	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

820 N O St and **Third St**

912	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
911	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
909	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
910	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

N P St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1407 N P St and **Fifth St**

615	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
614	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
616	**Perpendicular**	**S**	**Gutter**
613	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1406 N P St and **W Yosemite Ave**

70	**Combination**	**E**	**Ramp Landing**
71	**Perpendicular**	**N**	**Ramp Slope**
69	**Combination**	**S**	**Compliant Curb Ramp**
72	**Combination**	**W**	**Compliant Curb Ramp**

N Park Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1137 N Park Dr and **Redwood Dr**

956	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
958	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
957	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

N Q St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1332 N Q St and **Fifth St**			
611	**Perpendicular**	**E**	**Ramp Landing**
609	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
612	**Perpendicular**	**S**	**Ramp Slope**
610	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
872 N Q St and **Fourth St**			
507	**Parallel**	**ESE**	**Gutter**
508	**Island-Cut Through**	**NE**	**Detectable Warning Surface**
509	**Perpendicular**	**NNE**	**Compliant Curb Ramp**
505	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
506	**Parallel**	**SE**	**Ramp Landing**
504	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

N Schnoor Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1537 N Schnoor Ave and **2000 N Schnoor Ave**			
2432	**Perpendicular**	**NW**	**Ramp Slope**
2433	**Perpendicular**	**SW**	**Ramp Slope**
1217 N Schnoor Ave and **Beechwood Way**			
2438	**Perpendicular**	**NW**	**Ramp Landing**
2440	**Curb Ramp Required**	**SE**	**Access Route**
2439	**Perpendicular**	**SW**	**Ramp Slope**
711 N Schnoor Ave and **Evergreen Pl**			
713	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
711	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
712	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
716 N Schnoor Ave and **Fillmore Ave**			
716	**Perpendicular**	**NE**	**Ramp Slope**
714	**Perpendicular**	**SE**	**Ramp Slope**
715	**Curb Ramp Required**	**W**	**Access Route**
1000 N Schnoor Ave and **Foxglove Way**			
2430	**Perpendicular**	**NE**	**Ramp Width**
2429	**Perpendicular**	**NW**	**Gutter**
2431	**Perpendicular**	**SE**	**Ramp Width**
2428	**Perpendicular**	**SW**	**Ramp Slope**

1129 N Schnoor Ave and **Ironwood Way**

2434	**Perpendicular**	**NW**	**Ramp Slope**
2435	**Perpendicular**	**SW**	**Ramp Slope**

1263 N Schnoor Ave and **Jefferson Ave**

720	**Perpendicular**	**NE**	**Ramp Slope**
719	**Perpendicular**	**NW**	**Ramp Slope**
717	**Perpendicular**	**SE**	**Ramp Slope**
718	**Perpendicular**	**SW**	**Ramp Landing**

1001 N Schnoor Ave and **Kennedy St**

3940	**Perpendicular**	**NE**	**Ramp Landing**
3942	**Perpendicular**	**NW**	**Ramp Landing**
3941	**Perpendicular**	**SE**	**Ramp Slope**
3943	**Perpendicular**	**SW**	**Compliant Curb Ramp**

883 N Schnoor Ave and **Riverview Dr**

723	**Perpendicular**	**NE**	**Ramp Landing**
722	**Perpendicular**	**SE**	**Ramp Landing**
721	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

882 N Schnoor Ave and **Trevor Way**

2516	**Perpendicular**	**NW**	**Ramp Landing**
2517	**Perpendicular**	**SW**	**Ramp Slope**

710 N Schnoor Ave and **University Ave**

709	**Perpendicular**	**NE**	**Ramp Slope**
708	**Perpendicular**	**NW**	**Ramp Slope**
710	**Perpendicular**	**SE**	**Ramp Slope**
707	**Perpendicular**	**SW**	**Ramp Slope**

1239 N Schnoor Ave and **Westwood Pl**

788	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
789	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
787	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

N Westberry Blv

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

402 N Westberry Blv and **Common Way**

2308	**Perpendicular**	**NE**	**Gutter**
2307	**Perpendicular**	**NW**	**Ramp Slope**
2305	**Perpendicular**	**SE**	**Ramp Slope**
2306	**Perpendicular**	**SW**	**Ramp Slope**

401 N Westberry Blv and **Fairfield Way**

2357	**Perpendicular**	**NE**	**Ramp Transition**
2356	**Perpendicular**	**NW**	**Ramp Slope**
2354	**Perpendicular**	**SE**	**Ramp Slope**
2355	**Perpendicular**	**SW**	**Ramp Width**

400 N Westberry Blv and **Fairway Ave**

2300	Perpendicular	NE	Gutter
2299	Perpendicular	NW	Ramp Landing
2297	Perpendicular	SE	Ramp Slope
2298	Perpendicular	SW	Ramp Width

National Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1165 National Ave and **Accornero Ave**			
807	Perpendicular	NE	Ramp Flare
806	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
808	Perpendicular	S	Ramp Slope
1270 National Ave and **Fairview Ave**			
434	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
435	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
437	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
436	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route
1243 National Ave and **Krest St**			
559	No Sidewalk, Curb Ramp Not Required	N	Pedestrian Access Route
560	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
561	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route
1271 National Ave and **Rotan Ave**			
430	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
431	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
433	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
432	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route
1052 National Ave and **S Camden Way**			
565	No Sidewalk, Curb Ramp Not Required	E	Pedestrian Access Route
669	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route
667	No Sidewalk, Curb Ramp Not Required	NW	Pedestrian Access Route
670	No Sidewalk, Curb Ramp Not Required	SE	Pedestrian Access Route
668	No Sidewalk, Curb Ramp Not Required	SW	Pedestrian Access Route
1235 National Ave and **Schnoor Ave**			
552	Parallel	NE	Ramp Landing
555	Perpendicular	NW	Gutter
553	Perpendicular	SE	Gutter
554	Perpendicular	SW	Gutter
1238 National Ave and **Sunnydale St**			
1662	Perpendicular	NE	Ramp Landing
1661	Perpendicular	NW	Ramp Slope
1660	Curb Ramp Required	S	Access Route
1234 National Ave and **Williams Ave**			
442	No Sidewalk, Curb Ramp Not Required	NE	Pedestrian Access Route

443	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
444	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
445	**Perpendicular**	**SW**	**Compliant Curb Ramp**

Navel Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1561 Navel Ave and Lemon Ave			
2987	**Perpendicular**	**NW**	**Ramp Landing**
2988	**Curb Ramp Required**	**SE**	**Access Route**
1562 Navel Ave and Tangerine Ave			
2994	**Curb Ramp Required**	**NE**	**Access Route**
2993	**Perpendicular**	**SE**	**Ramp Slope**

Nebraska Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
388 Nebraska Ave and E Cleveland Ave			
4150	**Parallel**	**NE**	**Ramp Cross Slope**
4149	**Parallel**	**NW**	**Gutter**
4147	**Parallel**	**SE**	**Ramp Cross Slope**
4148	**Parallel**	**SW**	**Ramp Cross Slope**
1369 Nebraska Ave and Rush St			
1318	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1319	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1317	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1320	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1048 Nebraska Ave and W Sherwood Way			
1363	**Perpendicular**	**NE**	**Ramp Slope**
1362	**Perpendicular**	**NW**	**Ramp Slope**
1360	**Perpendicular**	**SE**	**Ramp Slope**
1361	**Perpendicular**	**SW**	**Ramp Slope**

Nebraska St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
389 Nebraska St and W South St			
1293	**Perpendicular**	**NE**	**Ramp Slope**
1294	**Parallel**	**SE**	**Ramp Landing**
1295	**Parallel**	**SW**	**Ramp Landing**

Neplus Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

682 Neplus Way and **Drake St**

3110	**Perpendicular**	**NE**	**Ramp Width**
3108	**Perpendicular**	**SE**	**Ramp Width**
3109	**Curb Ramp Required**	**SW**	**Access Route**

Nicola Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1139 Nicola Way and **Noreen Way**

3926	**Curb Ramp Required**	**N**	**Access Route**
3928	**Perpendicular**	**SE**	**Ramp Slope**
3927	**Perpendicular**	**SW**	**Ramp Transition**

429 Nicola Way and **W Sherwood Way**

1335	**Perpendicular**	**NE**	**Gutter**
1334	**Perpendicular**	**NW**	**Gutter**
1333	**Curb Ramp Required**	**S**	**Access Route**

Ninth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1232 Ninth St and **S K St**

132	**Combination**	**E**	**Ramp Landing**
131	**Combination**	**N**	**Ramp Landing**
133	**Curb Ramp Required**	**SW**	**Access Route**

Noreen Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

802 Noreen Way and **Ashlan Way**

3986	**Curb Ramp Required**	**E**	**Access Route**
3987	**Perpendicular**	**NW**	**Ramp Landing**
3985	**Perpendicular**	**SW**	**Ramp Slope**

801 Noreen Way and **Asti Way**

3999	**Perpendicular**	**NE**	**Ramp Landing**
3998	**Perpendicular**	**SE**	**Ramp Slope**
3997	**Curb Ramp Required**	**W**	**Access Route**

Oak St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1320 Oak St and **Grove St**

2758	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2757	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2756	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1439 Oak St and **Park St**

2759	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2762	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2760	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2761	**Perpendicular**	**SW**	**Ramp Width**

Oakridge Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

613 Oakridge Dr and **Deerwood Ct**

405	**Curb Ramp Required**	**N**	**Access Route**
406	**Perpendicular**	**SE**	**Ramp Slope**
407	**Perpendicular**	**SW**	**Ramp Slope**

1512 Oakridge Dr and **Deerwood Dr**

404	**Perpendicular**	**SW**	**Ramp Landing**

Olive Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

732 Olive Ave and

10	**Perpendicular**	**NE**	**Ramp Landing**
8	**Perpendicular**	**NW**	**Ramp Width**
9	**Curb Ramp Required**	**SW**	**Access Route**

1251 Olive Ave and **Don Miguel St**

3043	**Island-Cut Through**	**N**	**Ramp Slope**
3042	**Perpendicular**	**NE**	**Detectable Warning Surface**
3044	**Perpendicular**	**NW**	**Detectable Warning Surface**
3041	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

778 Olive Ave and **Grove St**

44	**Perpendicular**	**SE**	**Ramp Flare**
43	**Perpendicular**	**SW**	**Ramp Flare**

1540 Olive Ave and **Howard Rd**

2732	**Curb Ramp Required**	**NE**	**Access Route**
2731	**Perpendicular**	**SE**	**Gutter**
2730	**Perpendicular**	**SW**	**Ramp Slope**

832 Olive Ave and **Martin St**

21	**Perpendicular**	**N**	**Ramp Flare**
19	**Parallel**	**SE**	**Ramp Cross Slope**
20	**Parallel**	**SW**	**Ramp Landing**

890 Olive Ave and **Park St**

58	**Island-Cut Through**	**NE**	**Detectable Warnings**
59	**Perpendicular**	**NW**	**Ramp Landing**
56	**Perpendicular**	**SE**	**Ramp Landing**

57	**Perpendicular**	**SW**	**Ramp Landing**

1213 Olive Ave and Roosevelt Ave

3034	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3033	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3036	**Perpendicular**	**SE**	**Ramp Slope**
3035	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1228 Olive Ave and S G St

3074	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3073	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3072	**Curb Ramp Required**	**SW**	**Access Route**

941 Olive Ave and S I St

5	**Parallel**	**NE**	**Ramp Slope**
6	**Parallel**	**NW**	**Ramp Cross Slope**
7	**Curb Ramp Required**	**S**	**Access Route**

983 Olive Ave and S K St

22	**Parallel**	**NE**	**Ramp Cross Slope**
23	**Perpendicular**	**NW**	**Ramp Slope**
25	**Perpendicular**	**SE**	**Ramp Landing**
24	**Perpendicular**	**SW**	**Ramp Landing**

1060 Olive Ave and S N St

35	**Perpendicular**	**NE**	**Ramp Landing**
37	**Perpendicular**	**NW**	**Ramp Landing**
36	**Curb Ramp Required**	**S**	**Access Route**

1106 Olive Ave and S O St

47	**Driveway**	**N**	**Pedestrian Access Route**
46	**Perpendicular**	**SE**	**Ramp Flare**
45	**Parallel**	**SW**	**Gutter**

1105 Olive Ave and S P St

38	**Perpendicular**	**NE**	**Ramp Slope**
39	**Perpendicular**	**NW**	**Gutter**
40	**Curb Ramp Required**	**S**	**Access Route**

984 Olive Ave and Santa Bonita St

55	**Driveway**	**N**	**Pedestrian Access Route**
54	**Perpendicular**	**SE**	**Ramp Landing**
53	**Perpendicular**	**SW**	**Ramp Flare**

1202 Olive Ave and Santa Cruz St

29	**Perpendicular**	**ENE**	**Ramp Landing**
28	**Perpendicular**	**NW**	**Ramp Slope**
31	**Perpendicular**	**SE**	**Ramp Landing**
30	**Perpendicular**	**SW**	**Ramp Landing**
26	**Perpendicular**	**WNW**	**Ramp Landing**

777 Olive Ave and Sixth St

41	**Perpendicular**	**NE**	**Ramp Landing**

42	**Perpendicular**	**NW**	**Ramp Landing**

1367 Olive Ave and **Tozer St**

3477	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3480	**Perpendicular**	**NW**	**Gutter**
3478	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3479	**Perpendicular**	**SW**	**Gutter**

549 Olive Ave and **Wallace Ave**

3086	**Perpendicular**	**NE**	**Ramp Width**
3087	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3088	**Perpendicular**	**SE**	**Ramp Slope**
3089	**Perpendicular**	**SW**	**Ramp Slope**

Orange Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

474 Orange Tree Dr and **Toschi Dr**

2684	**Perpendicular**	**NW**	**Ramp Slope**
2682	**Curb Ramp Required**	**SE**	**Access Route**
2683	**Perpendicular**	**SW**	**Ramp Slope**

Orchard Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1110 Orchard Ave and **Fillmore Ave**

4391	**Curb Ramp Required**	**E**	**Access Route**
4392	**Perpendicular**	**N**	**Ramp Slope**
4393	**Perpendicular**	**S**	**Ramp Landing**

1415 Orchard Ave and **Venturi Ave**

777	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
778	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
776	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
779	**Perpendicular**	**SW**	**Ramp Landing**

Orchard Hill Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1547 Orchard Hill Dr and **Colima Ave**

2797	**Curb Ramp Required**	**NW**	**Access Route**
2796	**Perpendicular**	**SE**	**Ramp Transition**

Oso Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

625 Oso Dr and **Knox St**

3096	**Curb Ramp Required**	**NW**	**Access Route**
3094	**Perpendicular**	**SE**	**Ramp Slope**
3095	**Perpendicular**	**SW**	**Ramp Slope**

Owens St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
22 Owens St and **Adell St**			
3873	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3875	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3874	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
637 Owens St and **Harding Ave**			
1195	**Curb Ramp Required**	**E**	**Access Route**
1197	**Perpendicular**	**NW**	**Ramp Slope**
1196	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
713 Owens St and **W Clark St**			
3871	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3870	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3872	**Perpendicular**	**SW**	**Ramp Landing**

Padre St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
558 Padre St and **Peerless St**			
3115	**Curb Ramp Required**	**NW**	**Access Route**
3113	**Perpendicular**	**SE**	**Ramp Width**
3114	**Perpendicular**	**SW**	**Ramp Slope**
1570 Padre St and **Solano St**			
3116	**Perpendicular**	**SE**	**Ramp Width**
3117	**Curb Ramp Required**	**SW**	**Access Route**

Paintbrush Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
893 Paintbrush Dr and **Easy Ct**			
1471	**Perpendicular**	**E**	**Ramp Landing**
1469	**Perpendicular**	**N**	**Ramp Slope**
1470	**Curb Ramp Required**	**SW**	**Access Route**
1142 Paintbrush Dr and **Fairmont Ct**			
1468	**Perpendicular**	**E**	**Ramp Slope**
1466	**Curb Ramp Required**	**NW**	**Access Route**
1467	**Perpendicular**	**S**	**Ramp Slope**
892 Paintbrush Dr and **Love Ct**			
1473	**Perpendicular**	**E**	**Ramp Slope**

1474	**Perpendicular**	**N**	**Ramp Landing**
1472	**Curb Ramp Required**	**SW**	**Access Route**

1209 Paintbrush Dr and **Riverview Dr**

1478	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1479	**Perpendicular**	**SE**	**Ramp Slope**
1480	**Perpendicular**	**SW**	**Ramp Slope**

1249 Paintbrush Dr and **Tragon St**

1464	**Perpendicular**	**N**	**Ramp Slope**
1463	**Curb Ramp Required**	**SE**	**Access Route**
1465	**Perpendicular**	**W**	**Ramp Slope**

Pamela Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

609 Pamela Dr and **De Ann Cove**

2370	**Perpendicular**	**NE**	**Ramp Width**
2369	**Perpendicular**	**NW**	**Ramp Transition**
2371	**Curb Ramp Required**	**SE**	**Access Route**
2368	**Curb Ramp Required**	**SW**	**Access Route**

608 Pamela Dr and **Deborah Ln**

2379	**Perpendicular**	**NE**	**Ramp Slope**
2378	**Perpendicular**	**NW**	**Ramp Slope**
2380	**Curb Ramp Required**	**SW**	**Access Route**

610 Pamela Dr and **Taylor Lane**

2376	**Perpendicular**	**NE**	**Ramp Width**
2375	**Perpendicular**	**NW**	**Gutter**
2377	**Curb Ramp Required**	**SE**	**Access Route**

Papaya St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1493 Papaya St and **E Almond Ave**

3511	**Curb Ramp Required**	**NW**	**Access Route**
3512	**Perpendicular**	**SE**	**Ramp Slope**
3510	**Perpendicular**	**SW**	**Ramp Slope**

Park Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

428 Park Ln and **N Park Dr**

937	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
939	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
938	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Park St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1247 Park St and Maple St			
2749	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2748	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2747	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Parkwood Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1499 Parkwood Ave and Lemon Ave			
3016	**Perpendicular**	**NE**	**Ramp Slope**
3012	**Perpendicular**	**NW**	**Ramp Slope**
3015	**Perpendicular**	**SE**	**Ramp Slope**
3014	**Curb Ramp Required**	**SW**	**Access Route**
1500 Parkwood Ave and Raymond Thomas St			
3002	**Perpendicular**	**NE**	**Ramp Slope**
3005	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3003	**Perpendicular**	**SE**	**Ramp Slope**
3004	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
688 Parkwood Ave and Valencia Ave			
3010	**Perpendicular**	**ENE**	**Ramp Slope**
3011	**Perpendicular**	**NNE**	**Ramp Slope**
3006	**Perpendicular**	**NW**	**Ramp Slope**
3009	**Perpendicular**	**SE**	**Ramp Slope**
3008	**Perpendicular**	**SSW**	**Ramp Slope**
3007	**Perpendicular**	**WSW**	**Ramp Slope**

Paseo Del Mar Prkw

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
421 Paseo Del Mar Prkw and Rancho Mirage Rd			
3140	**Perpendicular**	**NE**	**Ramp Width**
3141	**Perpendicular**	**SE**	**Gutter**
3142	**Curb Ramp Required**	**SW**	**Access Route**
420 Paseo Del Mar Prkw and San Gabriel Dr			
3464	**Perpendicular**	**NW**	**Ramp Slope**
3466	**Curb Ramp Required**	**SE**	**Access Route**
3465	**Perpendicular**	**SW**	**Ramp Width**

Paul Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1182 Paul Ave and Schnoor Ave			
795	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
796	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
794	**Curb Ramp Required**	**W**	**Access Route**

Peach Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
306 Peach Ct and Peach St			
3499	**Perpendicular**	**NE**	**Ramp Slope**
3501	**Perpendicular**	**SE**	**Ramp Width**
3500	**Curb Ramp Required**	**W**	**Access Route**

Peach St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1593 Peach St and Nectarine St			
3502	**Parallel**	**NE**	**Ramp Landing**
3503	**Curb Ramp Required**	**SW**	**Access Route**

Peach Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1472 Peach Tree Dr and Apple Tree Ct			
2644	**Perpendicular**	**NE**	**Ramp Slope**
2645	**Curb Ramp Required**	**NW**	**Access Route**
2643	**Perpendicular**	**SE**	**Ramp Landing**
33 Peach Tree Dr and Cherry Tree Dr			
2638	**Perpendicular**	**NE**	**Ramp Landing**
2637	**Perpendicular**	**NW**	**Ramp Landing**
2639	**Curb Ramp Required**	**SE**	**Access Route**
1471 Peach Tree Dr and Orange Tree Ct			
2642	**Perpendicular**	**NE**	**Ramp Landing**
2641	**Perpendicular**	**SE**	**Ramp Landing**
2640	**Curb Ramp Required**	**SW**	**Access Route**
1474 Peach Tree Dr and Pear Tree Dr			
2651	**Curb Ramp Required**	**NE**	**Access Route**
2649	**Perpendicular**	**SE**	**Ramp Slope**
2650	**Perpendicular**	**SW**	**Ramp Landing**

Peanut Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1473 Peanut Ct and Peach Tree Dr			
2647	**Perpendicular**	**NE**	**Ramp Landing**
2648	**Curb Ramp Required**	**NW**	**Access Route**
2646	**Perpendicular**	**SE**	**Ramp Landing**

Peanut Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
562 Peanut Dr and Toschi Dr			
2694	**Perpendicular**	**NW**	**Ramp Width**
2692	**Curb Ramp Required**	**SE**	**Access Route**
2693	**Perpendicular**	**SW**	**Ramp Slope**

Pear Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
158 Pear Ct and Pear St			
3517	**Perpendicular**	**N**	**Ramp Landing**
3519	**Perpendicular**	**SE**	**Gutter**
3518	**Curb Ramp Required**	**W**	**Access Route**

Pear St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1588 Pear St and Apple St			
3476	**Parallel**	**SW**	**Ramp Landing**
62 Pear St and E Almond Ave			
3515	**Perpendicular**	**NE**	**Ramp Slope**
3514	**Perpendicular**	**NW**	**Ramp Width**
3516	**Perpendicular**	**SE**	**Ramp Width**
3513	**Perpendicular**	**SW**	**Ramp Slope**
550 Pear St and Kiwi St			
3522	**Perpendicular**	**NW**	**Gutter**
3521	**Curb Ramp Required**	**SE**	**Access Route**
3520	**Perpendicular**	**SW**	**Gutter**
63 Pear St and Madarin St			
3540	**Perpendicular**	**NE**	**Ramp Width**
3541	**Curb Ramp Required**	**NW**	**Access Route**
3539	**Perpendicular**	**SE**	**Ramp Width**

Pear Tree Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1534 Pear Tree Dr and **Berry Dr**			
2664	**Curb Ramp Required**	**NW**	**Access Route**
2663	**Perpendicular**	**SE**	**Ramp Slope**
1475 Pear Tree Dr and **Hazelnut Dr**			
2630	**Perpendicular**	**NE**	**Ramp Landing**
2629	**Perpendicular**	**SE**	**Ramp Landing**
2631	**Curb Ramp Required**	**SW**	**Access Route**

Pecan Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
413 Pecan Ave and **Apricot Lane**			
2984	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2983	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1454 Pecan Ave and **Ave 13**			
2933	**Perpendicular**	**NE**	**Ramp Slope**
2934	**Perpendicular**	**NW**	**Gutter**
2936	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2935	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
970 Pecan Ave and **Colombard Dr**			
2869	**Perpendicular**	**NE**	**Ramp Slope**
2868	**Perpendicular**	**NW**	**Ramp Slope**
2870	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
880 Pecan Ave and **Concord Ct**			
2859	**Perpendicular**	**NE**	**Ramp Slope**
2860	**Perpendicular**	**NW**	**Ramp Slope**
2861	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
881 Pecan Ave and **Monterey St**			
2862	**Perpendicular**	**NE**	**Ramp Slope**
2863	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2864	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
409 Pecan Ave and **Munra Ave**			
2826	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2825	**Perpendicular**	**SE**	**Ramp Slope**
2824	**Perpendicular**	**SW**	**Ramp Slope**
569 Pecan Ave and **Pine St**			
2821	**Perpendicular**	**NE**	**Ramp Slope**
2820	**Perpendicular**	**NNW**	**Gutter**
2822	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

2823	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
2819	**Perpendicular**	**WNW**	**Compliant Curb Ramp**

684 Pecan Ave and **Victory Lane**

2817	**Perpendicular**	**NE**	**Detectable Warning Surface**
2816	**Perpendicular**	**NW**	**Detectable Warning Surface**
2818	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Penny Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

517 Penny Way and **Fairfield Way**

2362	**Perpendicular**	**NE**	**Ramp Transition**
2361	**Perpendicular**	**NW**	**Ramp Flare**
2363	**Curb Ramp Required**	**SE**	**Access Route**

516 Penny Way and **Fairway Ave**

2293	**Curb Ramp Required**	**NW**	**Access Route**
2291	**Perpendicular**	**SE**	**Ramp Transition**
2292	**Perpendicular**	**SW**	**Ramp Slope**

Percy St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

147 Percy St and **Clinton St**

3208	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3207	**Combination**	**N**	**Ramp Width**
3206	**Perpendicular**	**W**	**Gutter**

148 Percy St and **Santa Fe St**

3214	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3213	**Perpendicular**	**S**	**Detectable Warning Surface**
3215	**Perpendicular**	**W**	**Gutter**

Perkins Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1564 Perkins Ave and **Lemon Ave**

3018	**Curb Ramp Required**	**SE**	**Access Route**
3017	**Perpendicular**	**SW**	**Ramp Landing**

1465 Perkins Ave and **Tangerine Ave**

2995	**Perpendicular**	**NE**	**Ramp Slope**
2997	**Curb Ramp Required**	**NW**	**Access Route**
2996	**Perpendicular**	**SE**	**Ramp Slope**

Persimmon St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1590 Persimmon St and Coconut St			
3486	**Perpendicular**	**NE**	**Ramp Width**
3487	**Curb Ramp Required**	**NW**	**Access Route**

Petite Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
615 Petite Ave and Merlot Ave			
2530	**Perpendicular**	**NE**	**Ramp Slope**
2529	**Perpendicular**	**NW**	**Ramp Transition**
2531	**Perpendicular**	**SE**	**Ramp Slope**
2532	**Perpendicular**	**SW**	**Gutter**
1055 Petite Ave and Rhine Ct			
2533	**Perpendicular**	**NE**	**Ramp Slope**
2535	**Curb Ramp Required**	**NW**	**Access Route**
2534	**Perpendicular**	**SE**	**Ramp Slope**

Petite Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1210 Petite Ct and Petite Ave			
2538	**Perpendicular**	**NE**	**Ramp Slope**
2537	**Perpendicular**	**SE**	**Ramp Slope**
2536	**Curb Ramp Required**	**SW**	**Access Route**

Philip St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
53 Philip St and E Cleveland Ave			
1215	**Perpendicular**	**NE**	**Ramp Slope**
1214	**Perpendicular**	**NW**	**Ramp Landing**
52 Philip St and W Sherwood Way			
1243	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1245	**Perpendicular**	**SE**	**Ramp Slope**
1244	**Perpendicular**	**SW**	**Ramp Slope**

Pierce Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
347 Pierce Ln and Coolidge St			

1938	**Perpendicular**	**NE**	**Ramp Landing**
1937	**Perpendicular**	**NW**	**Ramp Width**
1936	**Curb Ramp Required**	**S**	**Access Route**

346 Pierce Ln and **Madison Dr**

1931	**Perpendicular**	**NE**	**Ramp Slope**
1932	**Perpendicular**	**SE**	**Ramp Slope**
1930	**Curb Ramp Required**	**W**	**Access Route**

Pine St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1539 Pine St and

2736	**Perpendicular**	**NE**	**Ramp Slope**
2737	**Perpendicular**	**SE**	**Ramp Slope**
2738	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

988 Pine St and **Fourth St**

501	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
503	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
502	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1542 Pine St and **Gill Ave**

2769	**Perpendicular**	**NE**	**Gutter**
2770	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2771	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1121 Pine St and **National Ave**

424	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
426	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
425	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

982 Pine St and **Oak St**

4388	**Perpendicular**	**N**	**Ramp Landing**
4390	**Parallel**	**S**	**Ramp Cross Slope**
4389	**Driveway**	**W**	**Pedestrian Access Route**

1008 Pine St and **Third St**

421	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
423	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
422	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Pinewood Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1342 Pinewood Ct and **Pinewood Dr**

1597	**Perpendicular**	**NE**	**Ramp Landing**
1600	**Perpendicular**	**NW**	**Ramp Landing**
1598	**Perpendicular**	**SE**	**Ramp Landing**
1599	**Perpendicular**	**SW**	**Ramp Landing**

Pinewood Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
839 Pinewood Dr and Monocott Dr			
1580	**Perpendicular**	**NE**	**Ramp Slope**
1579	**Perpendicular**	**SE**	**Ramp Landing**
1578	**Curb Ramp Required**	**W**	**Access Route**
916 Pinewood Dr and N Granada Dr			
1601	**Perpendicular**	**NE**	**Ramp Landing**
1602	**Perpendicular**	**NW**	**Ramp Slope**
1604	**Perpendicular**	**SE**	**Ramp Landing**
1603	**Perpendicular**	**SW**	**Ramp Slope**

Plumas St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1041 Plumas St and DWayer Ave			
2621	**Perpendicular**	**NE**	**Ramp Slope**
2622	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Podres Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1579 Podres Ln and Lilly St			
3293	**Perpendicular**	**N**	**Ramp Transition**
3294	**Perpendicular**	**S**	**Ramp Slope**

Polk Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1486 Polk Ave and Truman Dr			
1944	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1943	**Perpendicular**	**NE**	**Ramp Slope**
1946	**Perpendicular**	**NW**	**Ramp Slope**
1942	**Perpendicular**	**SE**	**Ramp Slope**
1945	**Perpendicular**	**SW**	**Ramp Width**
1941	**Curb Ramp Required**	**W**	**Access Route**

Pomegranate St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
184 Pomegranate St and Persimmon St			
3489	**Curb Ramp Required**	**NE**	**Access Route**

3488	**Perpendicular**	**SE**	**Ramp Slope**
3490	**Perpendicular**	**SW**	**Ramp Landing**

Popoli Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
552 Popoli Way and **Gabriel Way**			
3904	**Curb Ramp Required**	**N**	**Access Route**
3903	**Perpendicular**	**SW**	**Ramp Slope**

Quady Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
97 Quady Ln and **Oakridge Dr**			
213	**Perpendicular**	**NE**	**Ramp Slope**
212	**Perpendicular**	**NW**	**Ramp Slope**
211	**Curb Ramp Required**	**S**	**Access Route**

Rancho Mirage Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1573 Rancho Mirage Rd and **La Quinta Way**			
3143	**Perpendicular**	**NE**	**Ramp Width**
3144	**Curb Ramp Required**	**SW**	**Access Route**
602 Rancho Mirage Rd and **Linda Mesa Dr**			
3134	**Perpendicular**	**NE**	**Ramp Width**
3136	**Curb Ramp Required**	**NW**	**Access Route**
3135	**Perpendicular**	**SE**	**Ramp Width**
1572 Rancho Mirage Rd and **Loma Linda Dr**			
3133	**Curb Ramp Required**	**NE**	**Access Route**
3132	**Perpendicular**	**SE**	**Ramp Slope**
601 Rancho Mirage Rd and **Ortega Dr**			
3131	**Curb Ramp Required**	**NE**	**Access Route**
3130	**Perpendicular**	**NW**	**Ramp Width**
3129	**Perpendicular**	**SW**	**Gutter**

Rd 27

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
251 Rd 27 and **E Ellis St**			
2136	**Perpendicular**	**NE**	**Gutter**
2137	**Blended Transition**	**NW**	**Gutter**
2135	**Perpendicular**	**SE**	**Ramp Slope**
2138	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Rd 28

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1453 Rd 28 and Ave 13 1/2			
3529	**Perpendicular**	**NE**	**Compliant Curb Ramp**
3530	**Perpendicular**	**NW**	**Gutter**
3528	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3527	**Perpendicular**	**SW**	**Gutter**
1494 Rd 28 and Knox Rd			
4413	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4412	**Perpendicular**	**NW**	**Ramp Landing**
4414	**Perpendicular**	**SW**	**Ramp Landing**

Ren Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
482 Ren Way and Double Tree Way			
1853	**Perpendicular**	**NE**	**Ramp Landing**
1854	**Perpendicular**	**NW**	**Ramp Landing**
1852	**Curb Ramp Required**	**S**	**Access Route**
1192 Ren Way and Granada Dr			
1775	**Driveway**	**E**	**Pedestrian Access Route**
1774	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1773	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1158 Ren Way and Westberry Bvd			
1870	**Curb Ramp Required**	**E**	**Access Route**
1871	**Perpendicular**	**NW**	**Ramp Landing**
1872	**Perpendicular**	**SW**	**Ramp Landing**
1157 Ren Way and Zak Way			
1704	**Perpendicular**	**NE**	**Ramp Slope**
1703	**Perpendicular**	**NW**	**Ramp Slope**
1702	**Curb Ramp Required**	**S**	**Access Route**

Renee Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
974 Renee Way and Lucia Way			
3925	**Perpendicular**	**NE**	**Ramp Slope**
3924	**Perpendicular**	**SE**	**Ramp Slope**
3923	**Curb Ramp Required**	**W**	**Access Route**
973 Renee Way and Noreen Way			
3930	**Curb Ramp Required**	**E**	**Access Route**
3931	**Perpendicular**	**NW**	**Ramp Slope**

3929	**Perpendicular**	**SW**	**Ramp Slope**

Riverside Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
496 Riverside Ct and E Riverside Dr			
4087	**Curb Ramp Required**	**N**	**Access Route**
4088	**Perpendicular**	**SE**	**Detectable Warning Surface**
4089	**Perpendicular**	**SW**	**Ramp Landing**

Riverside Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1221 Riverside Dr and Sierra St			
1162	**Perpendicular**	**NE**	**Ramp Slope**
1163	**Perpendicular**	**NW**	**Ramp Slope**
1161	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Riverview Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1164 Riverview Dr and Aram Ave			
894	**Curb Ramp Required**	**N**	**Access Route**
892	**Curb Ramp Required**	**SE**	**Access Route**
893	**Curb Ramp Required**	**SW**	**Access Route**
1199 Riverview Dr and Imperial Dr			
699	**Perpendicular**	**NE**	**Ramp Slope**
700	**Perpendicular**	**NW**	**Ramp Landing**
698	**Perpendicular**	**SE**	**Ramp Landing**
701	**Perpendicular**	**SW**	**Ramp Slope**
728 Riverview Dr and Mainberry Dr			
636	**Curb Ramp Required**	**N**	**Access Route**
637	**Perpendicular**	**SE**	**Ramp Landing**
638	**Perpendicular**	**SW**	**Ramp Landing**
762 Riverview Dr and Monocott Dr			
1581	**Curb Ramp Required**	**N**	**Access Route**
1582	**Perpendicular**	**SE**	**Ramp Slope**
1583	**Perpendicular**	**SW**	**Ramp Slope**
1282 Riverview Dr and N Granada Dr			
1589	**Perpendicular**	**NE**	**Ramp Landing**
1588	**Perpendicular**	**NW**	**Ramp Slope**
1590	**Perpendicular**	**SE**	**Ramp Slope**
1587	**Perpendicular**	**SW**	**Ramp Landing**
727 Riverview Dr and Shannon Ave			

621	**Curb Ramp Required**	**N**	**Access Route**
623	**Perpendicular**	**SE**	**Ramp Landing**
622	**Perpendicular**	**SW**	**Ramp Landing**

1099 Riverview Dr and **Summer Set Ln**

1403	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1402	**Perpendicular**	**SE**	**Ramp Slope**
1404	**Perpendicular**	**SW**	**Ramp Landing**

1100 Riverview Dr and **Westberry Bvd**

738	**Curb Ramp Required**	**E**	**Access Route**
737	**Perpendicular**	**NW**	**Ramp Slope**
739	**Perpendicular**	**SW**	**Ramp Landing**

763 Riverview Dr and **Wolftrap Ct**

1584	**Curb Ramp Required**	**N**	**Access Route**
1585	**Perpendicular**	**SE**	**Ramp Slope**
1586	**Perpendicular**	**SW**	**Ramp Slope**

Riverwalk Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

515 Riverwalk Dr and **N B St**

3834	**Curb Ramp Required**	**N**	**Access Route**
3836	**Perpendicular**	**SE**	**Ramp Landing**
3835	**Perpendicular**	**SW**	**Ramp Landing**

Robinwood Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

607 Robinwood Way and **Kern St**

2228	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2227	**Perpendicular**	**SE**	**Ramp Slope**

Rogers St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

207 Rogers St and **E Cleveland Ave**

4185	**Parallel**	**NE**	**Ramp Cross Slope**
4187	**Parallel**	**NW**	**Ramp Slope**
4186	**Curb Ramp Required**	**S**	**Access Route**

204 Rogers St and **Green Way**

4033	**Combination**	**NE**	**Ramp Width**
4030	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4032	**Combination**	**SE**	**Ramp Cross Slope**
4031	**Perpendicular**	**SW**	**Ramp Landing**

206 Rogers St and **W Sherwood Way**

2258	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2259	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2257	**Curb Ramp Required**	**SE**	**Access Route**
2260	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

205 Rogers St and **Wessmith Way**

2249	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2246	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2248	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2247	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Roosevelt Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

889 Roosevelt Ave and **14Th St**

3026	**Perpendicular**	**NW**	**Ramp Flare**
3028	**Perpendicular**	**SE**	**Gutter**
3027	**Perpendicular**	**SW**	**Gutter**

1218 Roosevelt Ave and **Lake St**

3355	**Perpendicular**	**NE**	**Ramp Slope**
3354	**Perpendicular**	**SE**	**Ramp Flare**
3353	**Parallel**	**SW**	**Ramp Cross Slope**

1083 Roosevelt Ave and **S C St**

3030	**Perpendicular**	**NE**	**Ramp Slope**
3029	**Perpendicular**	**NNW**	**Ramp Slope**
3032	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
3031	**Perpendicular**	**WNW**	**Ramp Slope**

823 Roosevelt Ave and **Sunrise Ave**

3342	**Curb Ramp Required**	**NW**	**Access Route**
3340	**Perpendicular**	**SE**	**Gutter**
3341	**Perpendicular**	**SW**	**Ramp Landing**

Rose St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1248 Rose St and **Washington St**

3276	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3274	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3275	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Rosewood Cr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

857 Rosewood Cr and **Double Tree Way**

1502	**Perpendicular**	**NE**	**Ramp Slope**

1501	**Perpendicular**	**NNE**	**Ramp Slope**
1509	**Perpendicular**	**NW**	**Ramp Slope**
1510	**Perpendicular**	**SE**	**Ramp Slope**
1505	**Perpendicular**	**SSE**	**Ramp Slope**
1511	**Curb Ramp Required**	**W**	**Access Route**

Rotan Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1451 Rotan Ave and **Fifth St**			
529	**Combination**	**NE**	**Ramp Width**
526	**Curb Ramp Required**	**NW**	**Access Route**
528	**Combination**	**SE**	**Ramp Width**
527	**Combination**	**SW**	**Ramp Width**
1424 Rotan Ave and **Third St**			
459	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
458	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
460	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
461	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Royal Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
702 Royal Dr and **University Ave**			
705	**Curb Ramp Required**	**N**	**Access Route**
706	**Perpendicular**	**SE**	**Ramp Landing**
704	**Perpendicular**	**SW**	**Ramp Slope**

Rubicon Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1546 Rubicon Ave and **Ivy Glen Dr**			
2791	**Parallel**	**NE**	**Ramp Slope**
2792	**Under Construction**	**SW**	**Existing Curb Ramp**

Running Brook Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
551 Running Brook Dr and **San Pietro Dr**			
2329	**Perpendicular**	**NE**	**Ramp Slope**
2328	**Perpendicular**	**NW**	**Compliant Curb Ramp**
2330	**Curb Ramp Required**	**SE**	**Access Route**

Rush St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1336 Rush St and Austin Ave			
1252	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1251	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1253	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1250	**Curb Ramp Required**	**SW**	**Access Route**
1335 Rush St and Dellavalle Ave			
1248	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1249	**Perpendicular**	**NW**	**Ramp Slope**
1247	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1246	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
419 Rush St and N D St			
1321	**Perpendicular**	**NE**	**Ramp Flare**
1322	**Perpendicular**	**NW**	**Gutter**
1324	**Perpendicular**	**SE**	**Ramp Slope**
1323	**Perpendicular**	**SW**	**Ramp Landing**

S A St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1149 S A St and 10Th St			
4294	**Curb Ramp Required**	**E**	**Access Route**
4288	**Perpendicular**	**NE**	**Ramp Landing**
4287	**Perpendicular**	**NNE**	**Ramp Width**
4286	**Perpendicular**	**NNW**	**Ramp Width**
4285	**Parallel**	**NW**	**Ramp Cross Slope**
4293	**Perpendicular**	**S**	**Ramp Landing**
4283	**Perpendicular**	**SE**	**Ramp Landing**
4292	**Perpendicular**	**W**	**Ramp Landing**
1446 S A St and 6Th St			
4455	**Combination**	**E**	**Ramp Slope**
4454	**Combination**	**N**	**Ramp Cross Slope**
4456	**Combination**	**S**	**Ramp Cross Slope**
4453	**Perpendicular**	**W**	**Ramp Landing**
1417 S A St and Clinton St			
4319	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4320	**Perpendicular**	**N**	**Ramp Landing**
4322	**Perpendicular**	**S**	**Gutter**
4321	**Combination**	**W**	**Ramp Cross Slope**
1155 S A St and Roosevelt Ave			
3429	**Perpendicular**	**NE**	**Ramp Landing**

3430	**Perpendicular**	**NW**	**Ramp Slope**
3428	**Perpendicular**	**SE**	**Ramp Slope**
3431	**Parallel**	**SW**	**Ramp Landing**

1416 S A St and **Sunrise Ave**

4289	**Parallel**	**NE**	**Ramp Landing**
4290	**Perpendicular**	**NW**	**Ramp Landing**
4291	**Parallel**	**SW**	**Ramp Cross Slope**

S B St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1438 S B St and **14Th St**

3025	**Perpendicular**	**NE**	**Ramp Slope**
3024	**Perpendicular**	**NW**	**Ramp Slope**
3023	**Perpendicular**	**SW**	**Ramp Flare**

1180 S B St and **9Th St**

4329	**Perpendicular**	**E**	**Ramp Slope**
4330	**Perpendicular**	**N**	**Ramp Landing**
4328	**Perpendicular**	**S**	**Ramp Slope**
4327	**Perpendicular**	**W**	**Ramp Slope**

S C St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1300 S C St and **10Th St**

3674	**Perpendicular**	**E**	**Ramp Landing**
3673	**Perpendicular**	**N**	**Ramp Slope**
3675	**Perpendicular**	**S**	**Ramp Landing**
3672	**Perpendicular**	**W**	**Ramp Landing**

1301 S C St and **11Th St**

3611	**Perpendicular**	**E**	**Ramp Slope**
3612	**Perpendicular**	**N**	**Ramp Slope**
3610	**Perpendicular**	**S**	**Ramp Transition**
3609	**Perpendicular**	**W**	**Ramp Slope**

1422 S C St and **14Th St**

3067	**Perpendicular**	**E**	**Ramp Slope**
3066	**Perpendicular**	**N**	**Ramp Slope**
3064	**Perpendicular**	**S**	**Ramp Slope**
3065	**Perpendicular**	**W**	**Ramp Slope**

1286 S C St and **6Th St**

3658	**Perpendicular**	**E**	**Ramp Slope**
3655	**Perpendicular**	**N**	**Gutter**
3657	**Combination**	**S**	**Ramp Landing**
3656	**Perpendicular**	**W**	**Ramp Slope**

752 S C St and **7Th St**

3661	**Curb Ramp Required**	**E**	**Access Route**
3660	**Perpendicular**	**S**	**Ramp Landing**
3659	**Perpendicular**	**W**	**Ramp Landing**

1372 S C St and **9Th St**

3670	**Perpendicular**	**E**	**Ramp Slope**
3669	**Perpendicular**	**N**	**Ramp Slope**
3671	**Perpendicular**	**S**	**Ramp Slope**
3668	**Perpendicular**	**W**	**Ramp Slope**

1595 S C St and **Clinton St**

3667	**Curb Ramp Required**	**E**	**Access Route**
3666	**Perpendicular**	**S**	**Ramp Landing**
3665	**Perpendicular**	**W**	**Ramp Landing**

S D St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1334 S D St and **13Th St**

3056	**Perpendicular**	**E**	**Ramp Width**
3055	**Perpendicular**	**N**	**Ramp Slope**
3053	**Perpendicular**	**S**	**Ramp Slope**
3054	**Perpendicular**	**W**	**Ramp Width**

1281 S D St and **14Th St**

3060	**Perpendicular**	**E**	**Ramp Landing**
3057	**Perpendicular**	**N**	**Ramp Slope**
3059	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
3058	**Perpendicular**	**W**	**Ramp Width**

1278 S D St and **9Th St**

3630	**Perpendicular**	**E**	**Ramp Slope**
3631	**Combination**	**N**	**Ramp Slope**
3629	**Perpendicular**	**S**	**Ramp Slope**
3632	**Perpendicular**	**W**	**Ramp Slope**

1279 S D St and **Clinton St**

3634	**Combination**	**E**	**Ramp Slope**
3635	**Perpendicular**	**N**	**Ramp Slope**
3633	**Combination**	**S**	**Access Route**
3636	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

742 S D St and **Olive Ave**

3045	**Perpendicular**	**NE**	**Ramp Slope**
3046	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
3047	**Curb Ramp Required**	**SW**	**Access Route**

S Double Tree Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
471 S Double Tree Way and Gamay Ave			
2588	**Perpendicular**	**NE**	**Detectable Warning Surface**
2587	**Perpendicular**	**NW**	**Detectable Warning Surface**
2586	**Curb Ramp Required**	**SW**	**Access Route**
472 S Double Tree Way and Maple St			
1899	**Perpendicular**	**NE**	**Ramp Transition**
1900	**Perpendicular**	**SE**	**Ramp Landing**
1898	**Curb Ramp Required**	**W**	**Access Route**
473 S Double Tree Way and Pluma St			
1901	**Curb Ramp Required**	**N**	**Access Route**
1902	**Perpendicular**	**SE**	**Gutter**
1903	**Perpendicular**	**SW**	**Ramp Slope**
484 S Double Tree Way and W Almond Ave			
2570	**Perpendicular**	**NE**	**Ramp Slope**
2572	**Perpendicular**	**NW**	**Ramp Slope**
2571	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

S E St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1371 S E St and 11Th St			
4400	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4399	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4401	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
858 S E St and 12Th St			
4403	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4402	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4404	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
859 S E St and 13Th St			
4406	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4405	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4407	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1338 S E St and 6Th St			
4255	**Perpendicular**	**E**	**Ramp Slope**
4258	**Perpendicular**	**N**	**Ramp Landing**
4256	**Perpendicular**	**S**	**Ramp Slope**
4257	**Perpendicular**	**W**	**Ramp Slope**
1080 S E St and 7Th St			
4254	**Parallel**	**E**	**Ramp Width**

4252	**Curb Ramp Required**	**N**	**Access Route**
4253	**Curb Ramp Required**	**W**	**Access Route**

1079 S E St and **Clinton St**

4251	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4249	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4250	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

S G St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1310 S G St and **11Th St**

3081	**Perpendicular**	**NE**	**Ramp Slope**
3080	**Perpendicular**	**NW**	**Ramp Landing**
3082	**Perpendicular**	**SE**	**Ramp Width**
3079	**Perpendicular**	**SW**	**Ramp Slope**

101 S G St and **E Yosemite Ave**

4230	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
4231	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
4229	**Perpendicular**	**SE**	**Ramp Landing**
4228	**Perpendicular**	**SW**	**Ramp Landing**

1309 S G St and **Eighth St**

1124	**Perpendicular**	**E**	**Ramp Flare**
1125	**Perpendicular**	**N**	**Ramp Landing**
1123	**Perpendicular**	**S**	**Ramp Slope**
1122	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1398 S G St and **Seventh St**

1121	**Perpendicular**	**E**	**Ramp Slope**
1119	**Perpendicular**	**N**	**Ramp Slope**
1118	**Curb Ramp Required**	**S**	**Access Route**
1120	**Perpendicular**	**W**	**Ramp Landing**

S Gateway Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1216 S Gateway Dr and **10Th St**

4238	**Curb Ramp Required**	**N**	**Access Route**
4240	**Combination**	**S**	**Ramp Slope**
4239	**Perpendicular**	**W**	**Ramp Landing**

1388 S Gateway Dr and **11Th St**

4243	**Perpendicular**	**E**	**Ramp Slope**
4242	**Perpendicular**	**N**	**Ramp Landing**
4244	**Perpendicular**	**S**	**Ramp Slope**
4241	**Perpendicular**	**W**	**Ramp Slope**

979 S Gateway Dr and **12Th St**

3084	**Curb Ramp Required**	**NE**	**Access Route**
3083	**Perpendicular**	**NW**	**Ramp Slope**
3085	**Perpendicular**	**SW**	**Ramp Slope**

232 S Gateway Dr and **846 S Gateway Dr**

4408	**Driveway**	**W**	**Pedestrian Access Route**

45 S Gateway Dr and **E 9Th St**

4265	**Curb Ramp Required**	**E**	**Access Route**
4263	**Curb Ramp Required**	**N**	**Access Route**
4264	**Perpendicular**	**W**	**Gutter**

1029 S Gateway Dr and **Eighth St**

1128	**Curb Ramp Required**	**N**	**Access Route**
1126	**Perpendicular**	**S**	**Ramp Slope**
1127	**Curb Ramp Required**	**W**	**Access Route**

1373 S Gateway Dr and **Olive Ave**

3068	**Perpendicular**	**NE**	**Ramp Flare**
3069	**Perpendicular**	**NW**	**Ramp Landing**
3071	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3070	**Perpendicular**	**SW**	**Ramp Slope**

43 S Gateway Dr and **S Madera Ave**

4236	**Curb Ramp Required**	**NW**	**Access Route**
4237	**Perpendicular**	**SE**	**Ramp Flare**
4235	**Curb Ramp Required**	**SW**	**Access Route**

986 S Gateway Dr and **Seventh St**

1115	**Curb Ramp Required**	**NE**	**Access Route**
1116	**Curb Ramp Required**	**S**	**Access Route**
1117	**Perpendicular**	**W**	**Ramp Landing**

S I St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

766 S I St and **Eighth St**

166	**Combination**	**E**	**Ramp Landing**
165	**Perpendicular**	**N**	**Ramp Landing**
167	**Perpendicular**	**S**	**Ramp Landing**
168	**Combination**	**W**	**Ramp Slope**

1252 S I St and **Ninth St**

4	**Perpendicular**	**E**	**Ramp Landing**
3	**Perpendicular**	**N**	**Ramp Landing**
1	**Perpendicular**	**S**	**Gutter**
2	**Perpendicular**	**W**	**Ramp Landing**

765 S I St and **Seventh St**

162	**Perpendicular**	**E**	**Ramp Landing**
161	**Perpendicular**	**N**	**Ramp Slope**
163	**Combination**	**S**	**Ramp Slope**

164	**Perpendicular**	**W**	**Ramp Landing**

S J St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1127 S J St and Ninth St			
136	**Perpendicular**	**N**	**Ramp Landing**
134	**Curb Ramp Required**	**SE**	**Access Route**
135	**Perpendicular**	**W**	**Ramp Landing**

S L St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1241 S L St and Eighth St			
120	**Perpendicular**	**NE**	**Ramp Landing**
122	**Perpendicular**	**SE**	**Ramp Landing**
121	**Perpendicular**	**W**	**Ramp Landing**
1072 S L St and Seventh St			
118	**Perpendicular**	**NE**	**Ramp Landing**
117	**Perpendicular**	**NW**	**Ramp Slope**
119	**Perpendicular**	**SE**	**Ramp Landing**
116	**Perpendicular**	**SW**	**Ramp Landing**
1347 S L St and Sixth St			
89	**Perpendicular**	**NE**	**Ramp Landing**
88	**Perpendicular**	**NW**	**Ramp Landing**
90	**Perpendicular**	**SE**	**Ramp Landing**
91	**Perpendicular**	**SW**	**Ramp Slope**
1346 S L St and W Yosemite Ave			
100	**Combination**	**NE**	**Compliant Curb Ramp**
103	**Combination**	**NW**	**Ramp Landing**
101	**Combination**	**SE**	**Compliant Curb Ramp**
102	**Combination**	**SW**	**Ramp Cross Slope**

S Lake St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1355 S Lake St and 11Th St			
4275	**Perpendicular**	**E**	**Ramp Slope**
4274	**Perpendicular**	**S**	**Ramp Landing**
4273	**Perpendicular**	**W**	**Ramp Landing**

S Madera Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

442 S Madera Ave and

4224	**Parallel**	**NE**	**Detectable Warning Surface**
4227	**Perpendicular**	**NW**	**Ramp Landing**
4225	**Perpendicular**	**SE**	**Ramp Landing**
4226	**Perpendicular**	**SW**	**Ramp Landing**

1337 S Madera Ave and **Olive Ave**

11	**Perpendicular**	**NW**	**Ramp Landing**
13	**Perpendicular**	**SSW**	**Ramp Landing**
12	**Perpendicular**	**WSW**	**Ramp Landing**

S N St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

804 S N St and **Seventh St**

51	**Curb Ramp Required**	**N**	**Access Route**
50	**Perpendicular**	**SE**	**Ramp Landing**
52	**Perpendicular**	**SW**	**Ramp Landing**

1272 S N St and **Sixth St**

83	**Perpendicular**	**NE**	**Ramp Landing**
84	**Perpendicular**	**NW**	**Ramp Landing**
82	**Perpendicular**	**SE**	**Ramp Landing**
81	**Perpendicular**	**SW**	**Ramp Landing**

1273 S N St and **W Yosemite Ave**

108	**Perpendicular**	**NE**	**Compliant Curb Ramp**
111	**Combination**	**NW**	**Compliant Curb Ramp**
109	**Combination**	**SE**	**Ramp Flare**
110	**Combination**	**SW**	**Ramp Landing**

S O St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1397 S O St and **W Yosemite Ave**

75	**Combination**	**E**	**Compliant Curb Ramp**
74	**Perpendicular**	**N**	**Compliant Curb Ramp**
76	**Combination**	**S**	**Ramp Landing**
73	**Combination**	**W**	**Ramp Landing**

S Park Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

708 S Park Dr and **California Ave**

944	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
943	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
945	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

485 S Park Dr and **N J St**

965	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
966	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
967	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

17 S Park Dr and **Park Ln**

940	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
941	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
942	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

S Wolftrap St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

438 S Wolftrap St and **Capistrano Dr**

2598	**Perpendicular**	**NW**	**Gutter**
2600	**Curb Ramp Required**	**SE**	**Access Route**
2599	**Perpendicular**	**SW**	**Gutter**

436 S Wolftrap St and **Gamay Ave**

2596	**Curb Ramp Required**	**NE**	**Access Route**
2595	**Perpendicular**	**NW**	**Detectable Warning Surface**
2597	**Perpendicular**	**SW**	**Gutter**

519 S Wolftrap St and **Maple St**

1896	**Perpendicular**	**NE**	**Ramp Slope**
1897	**Perpendicular**	**NW**	**Ramp Landing**
1895	**Curb Ramp Required**	**S**	**Access Route**

521 S Wolftrap St and **Oak St**

1876	**Curb Ramp Required**	**N**	**Access Route**
1878	**Perpendicular**	**SE**	**Ramp Slope**
1877	**Perpendicular**	**SW**	**Ramp Slope**

520 S Wolftrap St and **Pluma St**

1874	**Curb Ramp Required**	**E**	**Access Route**
1873	**Perpendicular**	**NW**	**Ramp Landing**
1875	**Perpendicular**	**SW**	**Ramp Landing**

Saint Mary Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1551 Saint Mary Ave and **Munras Ave**

2843	**Perpendicular**	**NW**	**Ramp Transition**
2844	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1552 Saint Mary Ave and **Stadium Rd**

2845	**Perpendicular**	**NE**	**Ramp Width**
2846	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2847	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Salvador Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
336 Salvador Way and Josephine Ct			
2053	**Perpendicular**	**NE**	**Ramp Slope**
2052	**Perpendicular**	**NW**	**Ramp Slope**
2051	**Curb Ramp Required**	**S**	**Access Route**
1059 Salvador Way and La Jolla Way			
2054	**Curb Ramp Required**	**N**	**Access Route**
2055	**Perpendicular**	**SE**	**Gutter**
2056	**Perpendicular**	**SW**	**Ramp Slope**

San Andrea Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1550 San Andrea Ave and Munras Ave			
2839	**Curb Ramp Required**	**NE**	**Access Route**
2838	**Perpendicular**	**SW**	**Ramp Slope**

San Angelo Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
320 San Angelo Ave and Munra Ave			
2827	**Perpendicular**	**NW**	**Detectable Warnings**
2829	**Curb Ramp Required**	**SE**	**Access Route**
2828	**Perpendicular**	**SW**	**Detectable Warnings**

San Bruno Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1501 San Bruno Ave and Raymond Thomas St			
3728	**Perpendicular**	**NE**	**Ramp Slope**
3729	**Perpendicular**	**SE**	**Gutter**
3730	**Curb Ramp Required**	**SW**	**Access Route**

San Carlos Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1598 San Carlos Ave and Lemon Ave			
3688	**Perpendicular**	**NW**	**Ramp Slope**
3689	**Curb Ramp Required**	**SE**	**Access Route**
1599 San Carlos Ave and Tangerine Ave			
3695	**Curb Ramp Required**	**NW**	**Access Route**

	3694	**Perpendicular**	**SE**	**Gutter**

193 San Carlos Ave and **Valencia Ave**

	3690	**Perpendicular**	**NE**	**Ramp Slope**
	3693	**Perpendicular**	**NW**	**Ramp Landing**
	3691	**Perpendicular**	**SE**	**Ramp Slope**
	3692	**Perpendicular**	**SW**	**Ramp Slope**

San Diego Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1605 San Diego Ave and **Lemon Ave**

	3775	**Curb Ramp Required**	**NE**	**Access Route**
	3774	**Perpendicular**	**SW**	**Gutter**

San Gabriel Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

596 San Gabriel Dr and **Linda Mesa Dr**

	3456	**Curb Ramp Required**	**NE**	**Access Route**
	3455	**Perpendicular**	**NW**	**Ramp Width**
	3457	**Perpendicular**	**SW**	**Gutter**

597 San Gabriel Dr and **Mira Loma Way**

	3458	**Perpendicular**	**NE**	**Ramp Slope**
	3459	**Curb Ramp Required**	**NW**	**Access Route**
	3460	**Perpendicular**	**SE**	**Ramp Slope**

1586 San Gabriel Dr and **Verde Mesa Way**

	3454	**Curb Ramp Required**	**NE**	**Access Route**
	3453	**Perpendicular**	**SW**	**Ramp Width**

San Jose Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

340 San Jose Ave and **Citrus Way**

	3703	**Curb Ramp Required**	**NW**	**Access Route**
	3704	**Perpendicular**	**SE**	**Ramp Slope**
	3702	**Perpendicular**	**SW**	**Detectable Warnings**

1600 San Jose Ave and **Lemon Ave**

	3710	**Curb Ramp Required**	**NE**	**Access Route**
	3709	**Perpendicular**	**SW**	**Ramp Slope**

339 San Jose Ave and **Tangerine Ave**

	3696	**Perpendicular**	**NE**	**Detectable Warnings**
	3698	**Curb Ramp Required**	**NW**	**Access Route**
	3697	**Perpendicular**	**SE**	**Gutter**

342 San Jose Ave and **Valencia Ave**

3707	**Perpendicular**	**NE**	**Gutter**
3706	**Perpendicular**	**NW**	**Detectable Warnings**
3708	**Perpendicular**	**SE**	**Ramp Slope**
3705	**Perpendicular**	**SW**	**Ramp Slope**

San Juan Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

616 San Juan Dr and **Asilomar Dr**

1794	**Perpendicular**	**NE**	**Ramp Landing**
1796	**Perpendicular**	**SE**	**Ramp Landing**
1795	**Curb Ramp Required**	**W**	**Access Route**

San Pietro Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

70 San Pietro Dr and **Fairfield Way**

2333	**Perpendicular**	**NE**	**Detectable Warning Surface**
2335	**Curb Ramp Required**	**NW**	**Access Route**
2334	**Perpendicular**	**SE**	**Ramp Transition**

1522 San Pietro Dr and **Running Brook Dr**

2332	**Curb Ramp Required**	**NE**	**Access Route**
2331	**Perpendicular**	**SW**	**Ramp Slope**

San Ramon Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1601 San Ramon Ave and **Lemon Ave**

3711	**Perpendicular**	**NW**	**Gutter**
3712	**Curb Ramp Required**	**SE**	**Access Route**

San Sebastian Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1457 San Sebastian Way and **Toledo Way**

2176	**Perpendicular**	**NE**	**Ramp Landing**
2177	**Perpendicular**	**SE**	**Ramp Landing**
2175	**Curb Ramp Required**	**W**	**Access Route**

Sanarita Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

307 Sanarita Way and **Dominguez Dr**

	2013	**Perpendicular**	**NE**	**Gutter**
	2014	**Perpendicular**	**NW**	**Ramp Slope**
	2012	**Perpendicular**	**SE**	**Ramp Slope**
	2015	**Perpendicular**	**SW**	**Ramp Landing**
309 Sanarita Way and **Jericho Dr**				
	2009	**Perpendicular**	**NE**	**Ramp Slope**
	2010	**Perpendicular**	**NW**	**Ramp Slope**
	2008	**Perpendicular**	**SE**	**Ramp Slope**
	2011	**Perpendicular**	**SW**	**Ramp Flare**
308 Sanarita Way and **Jesse Dr**				
	2090	**Perpendicular**	**NE**	**Ramp Landing**
	2091	**Perpendicular**	**NW**	**Gutter**
	2093	**Perpendicular**	**SE**	**Ramp Transition**
	2092	**Perpendicular**	**SW**	**Ramp Slope**

Santa Bonita St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1509 Santa Bonita St and **Deerwood Ct**			
326	**Perpendicular**	**NE**	**Ramp Landing**
327	**Perpendicular**	**SW**	**Ramp Landing**
1150 Santa Bonita St and **Gamay St**			
320	**Curb Ramp Required**	**E**	**Access Route**
321	**Perpendicular**	**NW**	**Ramp Landing**
322	**Perpendicular**	**SW**	**Ramp Landing**
1435 Santa Bonita St and **Maple St**			
372	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
373	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
371	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
374	**Perpendicular**	**SW**	**Ramp Landing**

Santa Clara St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1507 Santa Clara St and **323 Santa Clara St**			
315	**Perpendicular**	**SE**	**Ramp Landing**
1025 Santa Clara St and **Gamay St**			
314	**Perpendicular**	**NE**	**Ramp Slope**
313	**Perpendicular**	**NW**	**Ramp Slope**
312	**Curb Ramp Required**	**S**	**Access Route**
1026 Santa Clara St and **Santa Cruz St**			
318	**Perpendicular**	**NE**	**Gutter**
317	**Perpendicular**	**NW**	**Ramp Landing**
316	**Curb Ramp Required**	**S**	**Access Route**

Santa Lucia Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
577 Santa Lucia Dr and Marina Dr			
1786	**Curb Ramp Required**	**E**	**Access Route**
1785	**Perpendicular**	**NW**	**Ramp Landing**
1787	**Perpendicular**	**SW**	**Ramp Landing**
576 Santa Lucia Dr and San Juan Dr			
1776	**Curb Ramp Required**	**E**	**Access Route**
1777	**Perpendicular**	**NW**	**Ramp Landing**
1778	**Perpendicular**	**SW**	**Ramp Landing**
578 Santa Lucia Dr and Seaside Dr			
1783	**Curb Ramp Required**	**E**	**Access Route**
1782	**Perpendicular**	**NW**	**Ramp Landing**
1784	**Perpendicular**	**SW**	**Ramp Landing**

Sassafras Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1120 Sassafras Dr and Lansing St			
1719	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1721	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1720	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Saunders Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1560 Saunders Ave and Lemon Ave			
2986	**Curb Ramp Required**	**SE**	**Access Route**
2985	**Perpendicular**	**SW**	**Ramp Slope**

Sauret St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
313 Sauret St and Peerless St			
3122	**Perpendicular**	**NE**	**Ramp Width**
3121	**Perpendicular**	**NW**	**Ramp Width**
3123	**Curb Ramp Required**	**SE**	**Access Route**

Scarlet Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
533 Scarlet Dr and Crimson Way			

	4426	**Curb Ramp Required**	**N**	**Access Route**
	4425	**Perpendicular**	**SE**	**Ramp Landing**
	4427	**Perpendicular**	**SW**	**Ramp Landing**

Schnoor Ave

Intersection ID and Street Names:		Type:	Orientation:	Specific Item:
1178 Schnoor Ave and **Fifth St**				
	601	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
	602	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
	604	**Perpendicular**	**SSW**	**Ramp Slope**
	603	**Perpendicular**	**SW**	**Ramp Landing**
760 Schnoor Ave and **Industrial Ave**				
	1924	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
	1926	**Perpendicular**	**NW**	**Ramp Landing**
	1925	**Parallel**	**SW**	**Ramp Width**
887 Schnoor Ave and **Julius Ave**				
	551	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
	550	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
	549	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
1220 Schnoor Ave and **Modoc St**				
	2627	**Perpendicular**	**NE**	**Ramp Slope**
	2628	**Parallel**	**NW**	**Access Route**
	2626	**Parallel**	**SE**	**Ramp Cross Slope**
761 Schnoor Ave and **Plumas St**				
	1928	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
	1929	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
	1927	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
843 Schnoor Ave and **Third St**				
	546	**Parallel**	**NE**	**Gutter**
	547	**Perpendicular**	**NW**	**Ramp Landing**
	545	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
	548	**Perpendicular**	**SW**	**Compliant Curb Ramp**

Seahorse Ct

Intersection ID and Street Names:		Type:	Orientation:	Specific Item:
160 Seahorse Ct and **Shannon Ave**				
	692	**Perpendicular**	**NE**	**Ramp Slope**
	694	**Perpendicular**	**SE**	**Ramp Slope**
	693	**Curb Ramp Required**	**W**	**Access Route**

Seaside Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
677 Seaside Dr and Asilomar Dr			
1800	**Perpendicular**	**NE**	**Ramp Landing**
1801	**Perpendicular**	**SE**	**Detectable Warning Surface**
1802	**Curb Ramp Required**	**W**	**Access Route**

Segovia Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
449 Segovia Ct and Alicante Way			
2156	**Curb Ramp Required**	**N**	**Access Route**
2158	**Perpendicular**	**SE**	**Ramp Slope**
2157	**Perpendicular**	**SW**	**Ramp Slope**
446 Segovia Ct and Barcelona Way			
2154	**Curb Ramp Required**	**NW**	**Access Route**
2155	**Perpendicular**	**SE**	**Ramp Landing**
447 Segovia Ct and San Sebastian Way			
2162	**Curb Ramp Required**	**N**	**Access Route**
2164	**Perpendicular**	**SE**	**Ramp Landing**
2163	**Perpendicular**	**SW**	**Ramp Landing**
1459 Segovia Ct and Sevilla St			
2165	**Curb Ramp Required**	**N**	**Access Route**
2167	**Perpendicular**	**SE**	**Ramp Slope**
2166	**Perpendicular**	**SW**	**Ramp Landing**
448 Segovia Ct and Toluca			
2159	**Curb Ramp Required**	**N**	**Access Route**
2161	**Perpendicular**	**SE**	**Ramp Landing**
2160	**Perpendicular**	**SW**	**Ramp Landing**

Seneca Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
967 Seneca Dr and Pecan Ave			
2866	**Perpendicular**	**NE**	**Ramp Transition**
2865	**Perpendicular**	**NW**	**Ramp Slope**
2867	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Seventh St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1354 Seventh St and **S J St**

141	**Combination**	**E**	**Ramp Flare**
144	**Combination**	**N**	**Ramp Flare**
142	**Combination**	**S**	**Ramp Flare**
143	**Combination**	**W**	**Ramp Cross Slope**

1353 Seventh St and **S K St**

125	**Perpendicular**	**E**	**Ramp Landing**
126	**Perpendicular**	**N**	**Ramp Landing**
124	**Perpendicular**	**S**	**Ramp Landing**
123	**Perpendicular**	**W**	**Ramp Landing**

897 Seventh St and **S O St**

49	**Perpendicular**	**N**	**Ramp Landing**
48	**Perpendicular**	**S**	**Ramp Flare**

Shannon Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

782 Shannon Ave and **Driftwood Dr**

624	**Curb Ramp Required**	**E**	**Access Route**
625	**Perpendicular**	**N**	**Ramp Landing**
626	**Perpendicular**	**S**	**Ramp Slope**

816 Shannon Ave and **National Ave**

563	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
564	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
562	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

108 Shannon Ave and **Sunset Ave**

673	**Perpendicular**	**NE**	**Ramp Landing**
674	**Perpendicular**	**NW**	**Ramp Slope**
672	**Perpendicular**	**SE**	**Ramp Transition**
671	**Perpendicular**	**SW**	**Ramp Transition**

Sharon Bvd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1495 Sharon Bvd and **Adell St**

3855	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3854	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3856	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

27 Sharon Bvd and **Cardwell St**

3857	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3859	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
3858	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1092 Sharon Bvd and **E Lincoln Ave**

1191	**Parallel**	**NE**	**Ramp Cross Slope**
1190	**Perpendicular**	**SE**	**Ramp Slope**
1189	**Curb Ramp Required**	**SW**	**Access Route**

747 Sharon Bvd and **Harding Ave**

1200	**Parallel**	**NE**	**Ramp Cross Slope**
1199	**Perpendicular**	**SE**	**Ramp Landing**
1198	**Curb Ramp Required**	**SW**	**Access Route**

1091 Sharon Bvd and **Owens St**

1194	**Perpendicular**	**NE**	**Gutter**
1193	**Parallel**	**SE**	**Ramp Cross Slope**
1192	**Curb Ramp Required**	**SW**	**Access Route**

754 Sharon Bvd and **Sonora St**

1168	**Perpendicular**	**NE**	**Ramp Slope**
1169	**Perpendicular**	**NW**	**Ramp Slope**
1167	**Perpendicular**	**SE**	**Ramp Slope**

25 Sharon Bvd and **W Clark St**

3860	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3861	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3862	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

753 Sharon Bvd and **W South St**

1179	**Perpendicular**	**NE**	**Ramp Flare**
1178	**Parallel**	**SE**	**Ramp Cross Slope**
1177	**Curb Ramp Required**	**W**	**Access Route**

746 Sharon Bvd and **Wilson Ave**

1203	**Parallel**	**NE**	**Ramp Cross Slope**
1202	**Perpendicular**	**SE**	**Ramp Slope**
1201	**Curb Ramp Required**	**SW**	**Access Route**

Shelly Cove

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

357 Shelly Cove and **Pamela Dr**

2374	**Perpendicular**	**NE**	**Ramp Width**
2373	**Perpendicular**	**NW**	**Ramp Width**
2372	**Curb Ramp Required**	**SW**	**Access Route**

Shoreside Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

142 Shoreside Dr and **Running Brook Dr**

2327	**Driveway**	**NW**	**Pedestrian Access Route**
2325	**Perpendicular**	**SE**	**Ramp Landing**
2326	**Perpendicular**	**SW**	**Ramp Transition**

Sierra St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1075 Sierra St and E Lincoln Ave			
1145	**Perpendicular**	**NE**	**Ramp Landing**
1146	**Perpendicular**	**NW**	**Gutter**
1148	**Perpendicular**	**SE**	**Ramp Slope**
1147	**Perpendicular**	**SW**	**Gutter**
1074 Sierra St and E Rush St			
1142	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1141	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1143	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1144	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
683 Sierra St and Green Way			
1224	**Curb Ramp Required**	**N**	**Access Route**
1225	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1226	**Perpendicular**	**SW**	**Ramp Landing**

Sixth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
987 Sixth St and S G St			
1113	**Perpendicular**	**E**	**Ramp Landing**
1112	**Perpendicular**	**N**	**Ramp Slope**
1114	**Perpendicular**	**S**	**Detectable Warning Surface**
1389 Sixth St and S H St			
1105	**Perpendicular**	**E**	**Ramp Landing**
1102	**Perpendicular**	**N**	**Ramp Landing**
1104	**Parallel**	**S**	**Ramp Cross Slope**
1103	**Parallel**	**W**	**Gutter**
837 Sixth St and S I St			
158	**Perpendicular**	**E**	**Ramp Landing**
157	**Combination**	**N**	**Ramp Flare**
159	**Combination**	**S**	**Ramp Slope**
160	**Combination**	**W**	**Ramp Slope**
1365 Sixth St and S J St			
145	**Combination**	**E**	**Ramp Slope**
148	**Combination**	**N**	**Ramp Slope**
146	**Combination**	**S**	**Ramp Slope**
147	**Combination**	**W**	**Ramp Slope**
1366 Sixth St and S K St			
94	**Combination**	**NE**	**Ramp Slope**
95	**Combination**	**NW**	**Ramp Width**

93	**Combination**	**SE**	**Ramp Slope**
92	**Combination**	**SW**	**Ramp Cross Slope**

978 Sixth St and **S M St**

86	**Perpendicular**	**NE**	**Ramp Landing**
85	**Perpendicular**	**NW**	**Ramp Landing**
87	**Perpendicular**	**SE**	**Ramp Width**

1340 Sixth St and **S O St**

78	**Combination**	**NE**	**Ramp Slope**
77	**Combination**	**NW**	**Ramp Slope**
79	**Combination**	**SE**	**Ramp Slope**
80	**Perpendicular**	**SW**	**Ramp Landing**

1408 Sixth St and **S P St**

67	**Perpendicular**	**NE**	**Ramp Slope**
66	**Perpendicular**	**NW**	**Ramp Landing**
68	**Perpendicular**	**SW**	**Ramp Landing**

Solano St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

56 Solano St and **Carmel St**

3161	**Perpendicular**	**NE**	**Gutter**
3162	**Perpendicular**	**SE**	**Ramp Width**
3163	**Curb Ramp Required**	**SW**	**Access Route**

54 Solano St and **Los Arcos Ln**

3151	**Perpendicular**	**NE**	**Ramp Width**
3152	**Perpendicular**	**NW**	**Ramp Width**
3153	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

58 Solano St and **Milow St**

3156	**Perpendicular**	**NE**	**Gutter**
3154	**Perpendicular**	**SE**	**Detectable Warnings**
3155	**Curb Ramp Required**	**SW**	**Access Route**

55 Solano St and **Sauret St**

3118	**Perpendicular**	**NE**	**Gutter**
3119	**Perpendicular**	**SE**	**Ramp Width**
3120	**Curb Ramp Required**	**SW**	**Access Route**

Sonora St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

672 Sonora St and **Ashlan Way**

3913	**Perpendicular**	**NE**	**Ramp Landing**
3911	**Perpendicular**	**SE**	**Ramp Landing**
3912	**Curb Ramp Required**	**W**	**Access Route**

749 Sonora St and **E Rush St**

1136	**Perpendicular**	**NE**	**Ramp Landing**
1135	**Perpendicular**	**NW**	**Ramp Slope**
1133	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1134	**Perpendicular**	**SW**	**Ramp Slope**

673 Sonora St and **Green Way**

1230	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1231	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1232	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Soquel Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

905 Soquel Ct and **Sawmill St**

3367	**Perpendicular**	**E**	**Ramp Transition**
3368	**Perpendicular**	**S**	**Ramp Slope**
3369	**Curb Ramp Required**	**W**	**Access Route**

Sparrow Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

159 Sparrow Way and **Meadow Lark Way**

2117	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
2118	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2119	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Spring Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1061 Spring Ave and **Winter Way**

1759	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1761	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1760	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

St 4Th

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1433 St 4Th and **N C St**

4384	**Perpendicular**	**E**	**Ramp Flare**
4387	**Parallel**	**N**	**Gutter**
4385	**Parallel**	**S**	**Ramp Width**
4386	**Parallel**	**W**	**Ramp Cross Slope**

St Julien Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
373 St Julien Dr and Goosecross Dr			
225	**Curb Ramp Required**	**E**	**Access Route**
226	**Perpendicular**	**NW**	**Ramp Slope**
227	**Perpendicular**	**SW**	**Ramp Slope**

St Tropez Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
527 St Tropez Dr and Howard Rd			
1838	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1837	**Perpendicular**	**SE**	**Ramp Landing**
1836	**Perpendicular**	**SW**	**Ramp Slope**
440 St Tropez Dr and Plumas St			
1885	**Perpendicular**	**NE**	**Detectable Warnings**
1886	**Perpendicular**	**NW**	**Ramp Landing**
1888	**Perpendicular**	**SE**	**Ramp Landing**
1887	**Perpendicular**	**SW**	**Ramp Landing**

St. Michelle Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
518 St. Michelle Dr and Goosecross Dr			
222	**Curb Ramp Required**	**E**	**Access Route**
223	**Perpendicular**	**NW**	**Ramp Slope**
224	**Perpendicular**	**SW**	**Gutter**
1505 St. Michelle Dr and Stadium Rd			
242	**Perpendicular**	**NE**	**Ramp Flare**
243	**Parallel**	**NW**	**Detectable Warning Surface**
241	**Perpendicular**	**SE**	**Gutter**

St. Montelena Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
668 St. Montelena Dr and Goosecross Dr			
219	**Perpendicular**	**NE**	**Ramp Slope**
220	**Perpendicular**	**NW**	**Ramp Landing**
218	**Perpendicular**	**SE**	**Ramp Slope**
221	**Perpendicular**	**SW**	**Ramp Slope**

Stadium Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
644 Stadium Rd and Crown Terrace			
309	**Curb Ramp Required**	**E**	**Access Route**
310	**Perpendicular**	**NW**	**Compliant Curb Ramp**
311	**Perpendicular**	**SW**	**Compliant Curb Ramp**
587 Stadium Rd and Deerwood Dr			
414	**Perpendicular**	**NE**	**Gutter**
413	**Perpendicular**	**SE**	**Ramp Landing**
412	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
807 Stadium Rd and Olive Ave			
34	**Perpendicular**	**NE**	**Ramp Landing**
33	**Perpendicular**	**NW**	**Ramp Slope**
32	**Perpendicular**	**SW**	**Ramp Landing**
1374 Stadium Rd and Pecan Ave			
2858	**No Sidewalk, Curb Ramp Not Required**	**ENE**	**Pedestrian Access Route**
2857	**No Sidewalk, Curb Ramp Not Required**	**NNE**	**Pedestrian Access Route**
2856	**Perpendicular**	**NW**	**Gutter**
2854	**Perpendicular**	**SE**	**Ramp Slope**
2855	**Perpendicular**	**SW**	**Gutter**
235 Stadium Rd and San Andrea Ave			
2835	**Perpendicular**	**NE**	**Ramp Slope**
2836	**Perpendicular**	**SE**	**Ramp Slope**
2837	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
233 Stadium Rd and San Angelo Ave			
2853	**Perpendicular**	**NE**	**Ramp Slope**
2851	**Perpendicular**	**SE**	**Ramp Slope**
2852	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
234 Stadium Rd and San Marco Ave			
2848	**Perpendicular**	**NE**	**Ramp Width**
2849	**Perpendicular**	**SE**	**Ramp Slope**
2850	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Stanford Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1597 Stanford Ave and Lemon Ave			
3687	**Curb Ramp Required**	**NE**	**Access Route**
3686	**Perpendicular**	**SW**	**Ramp Slope**
296 Stanford Ave and Valencia Ave			
3681	**Perpendicular**	**NE**	**Ramp Slope**

3682	**Perpendicular**	**NW**	**Ramp Slope**
3680	**Perpendicular**	**SE**	**Ramp Slope**
3683	**Perpendicular**	**SW**	**Gutter**

Stephanie Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1526 Stephanie Ln and			
2501	**Perpendicular**	**NE**	**Ramp Slope**
2502	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2500	**Perpendicular**	**SE**	**Ramp Slope**
1525 Stephanie Ln and **2360 Stephanie Ln**			
2499	**Perpendicular**	**NE**	**Ramp Slope**
2497	**Perpendicular**	**SE**	**Ramp Slope**
2498	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1413 Stephanie Ln and **Frederick Way**			
2493	**Perpendicular**	**NE**	**Ramp Slope**
2492	**Perpendicular**	**NW**	**Ramp Slope**
2490	**Perpendicular**	**SE**	**Gutter**
2491	**Perpendicular**	**SW**	**Gutter**

Steven Lane

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1481 Steven Lane and **Glade Ave**			
2408	**Curb Ramp Required**	**NE**	**Access Route**
2407	**Perpendicular**	**SE**	**Gutter**
2409	**Perpendicular**	**SW**	**Ramp Slope**
131 Steven Lane and **Kimberly Dr**			
2414	**Perpendicular**	**NE**	**Ramp Slope**
2413	**Curb Ramp Required**	**NW**	**Access Route**
2415	**Perpendicular**	**SE**	**Ramp Slope**
130 Steven Lane and **Marie Dr**			
2411	**Perpendicular**	**NE**	**Gutter**
2412	**Perpendicular**	**SE**	**Ramp Slope**
2410	**Curb Ramp Required**	**SW**	**Access Route**
842 Steven Lane and **Pamela Dr**			
2366	**Perpendicular**	**NE**	**Ramp Width**
2365	**Perpendicular**	**NW**	**Ramp Width**
2367	**Perpendicular**	**SE**	**Ramp Width**
2364	**Perpendicular**	**SW**	**Ramp Transition**

Strauss Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
566 Strauss Ct and Strauss Ct			
2905	**Curb Ramp Required**	**NW**	**Access Route**
2904	**Curb Ramp Required**	**SW**	**Access Route**

Suburban Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
784 Suburban Ave and Boulder Ave			
1492	**Perpendicular**	**NE**	**Ramp Slope**
1493	**Perpendicular**	**SE**	**Ramp Landing**
1491	**Curb Ramp Required**	**W**	**Access Route**
928 Suburban Ave and Riverview Dr			
1481	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1482	**Perpendicular**	**SE**	**Ramp Slope**
1483	**Perpendicular**	**SW**	**Ramp Slope**
929 Suburban Ave and Tragon St			
1485	**Perpendicular**	**NE**	**Ramp Slope**
1486	**Perpendicular**	**SE**	**Ramp Slope**
1484	**Curb Ramp Required**	**W**	**Access Route**

Summer Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
491 Summer Ln and Double Tree Way			
1846	**Under Construction**	**NE**	**Existing Curb Ramp**
1845	**Under Construction**	**NW**	**Existing Curb Ramp**
1848	**Perpendicular**	**SE**	**Ramp Landing**
1847	**Perpendicular**	**SW**	**Ramp Slope**
492 Summer Ln and Timberline Dr			
1858	**Perpendicular**	**NE**	**Ramp Landing**
1859	**Perpendicular**	**SE**	**Ramp Landing**
1860	**Curb Ramp Required**	**W**	**Access Route**

Summer Set Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
199 Summer Set Ln and Double Tree Way			
1398	**Perpendicular**	**NE**	**Ramp Landing**
1397	**Curb Ramp Required**	**S**	**Access Route**

906 Summer Set Ln and **Trabon Way**

1401	**Perpendicular**	**NE**	**Ramp Landing**
1400	**Perpendicular**	**SE**	**Ramp Landing**
1399	**Curb Ramp Required**	**W**	**Access Route**

Sundance Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1010 Sundance Ln and **Beechwood Way**			
2483	**Perpendicular**	**NE**	**Ramp Slope**
2481	**Curb Ramp Required**	**NW**	**Access Route**
2482	**Perpendicular**	**SE**	**Ramp Landing**
915 Sundance Ln and **Grapewood Way**			
2485	**Perpendicular**	**NE**	**Ramp Slope**
2486	**Curb Ramp Required**	**NW**	**Access Route**
2484	**Perpendicular**	**SE**	**Ramp Slope**
1009 Sundance Ln and **Meadowrest Way**			
2479	**Perpendicular**	**NE**	**Ramp Slope**
2478	**Perpendicular**	**SE**	**Ramp Slope**
2480	**Curb Ramp Required**	**SW**	**Access Route**
1305 Sundance Ln and **National Ave**			
1654	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1653	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1656	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1655	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
914 Sundance Ln and **Plumwood Way**			
2488	**Perpendicular**	**NE**	**Ramp Slope**
2489	**Curb Ramp Required**	**NW**	**Access Route**
2487	**Perpendicular**	**SE**	**Ramp Slope**
797 Sundance Ln and **Sunnydale St**			
1671	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1670	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1669	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
1376 Sundance Ln and **Third St**			
1705	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1706	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1708	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1707	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Sunnydale St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
773 Sunnydale St and **Autumn Ct**			

1630	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1629	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1628	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

774 Sunnydale St and **Sunnydale Ct**

1625	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1626	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1627	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

Sunrise Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1179 Sunrise Ave and **11Th St**

3343	**Perpendicular**	**NE**	**Ramp Landing**
3345	**Perpendicular**	**NW**	**Ramp Slope**
3344	**Curb Ramp Required**	**SE**	**Access Route**
3346	**Driveway**	**SW**	**Pedestrian Access Route**

810 Sunrise Ave and **Adelaide Ave**

3323	**Perpendicular**	**ENE**	**Ramp Slope**
3324	**Perpendicular**	**NNE**	**Ramp Slope**
3325	**Perpendicular**	**NW**	**Ramp Slope**
3326	**Curb Ramp Required**	**SW**	**Access Route**

1578 Sunrise Ave and **Drysdale Way**

3288	**Perpendicular**	**NE**	**Ramp Slope**
3289	**Perpendicular**	**NW**	**Ramp Transition**
3287	**Curb Ramp Required**	**SE**	**Access Route**

1186 Sunrise Ave and **Knox Ave**

3321	**Perpendicular**	**NE**	**Ramp Landing**
3320	**Perpendicular**	**SE**	**Ramp Landing**
3322	**Perpendicular**	**SW**	**Ramp Landing**

954 Sunrise Ave and **Lake St**

3339	**Curb Ramp Required**	**NW**	**Access Route**
3337	**Perpendicular**	**SE**	**Gutter**
3338	**Perpendicular**	**SW**	**Ramp Landing**

864 Sunrise Ave and **Lilly St**

3303	**Perpendicular**	**NE**	**Gutter**
3304	**Perpendicular**	**SE**	**Compliant Curb Ramp**
3305	**Perpendicular**	**SW**	**Ramp Slope**

721 Sunrise Ave and **S Lake St**

4280	**Curb Ramp Required**	**N**	**Access Route**
4277	**Perpendicular**	**NE**	**Ramp Landing**
4278	**Perpendicular**	**NW**	**Ramp Transition**
4281	**Perpendicular**	**SE**	**Gutter**
4282	**Perpendicular**	**SW**	**Ramp Landing**

811 Sunrise Ave and **Stinson Ave**

3329	**Curb Ramp Required**	**NW**	**Access Route**
3327	**Perpendicular**	**SE**	**Ramp Landing**
3328	**Perpendicular**	**SW**	**Gutter**

146 Sunrise Ave and **Tozer St**

3284	**Pedestrian Pad**	**NE**	**Detectable Warnings**
3286	**Pedestrian Pad Required**	**NW**	**Access Route**
3283	**Perpendicular**	**SE**	**Compliant Curb Ramp**
3285	**Perpendicular**	**SW**	**Compliant Curb Ramp**

1043 Sunrise Ave and **Vineyard Ave**

3333	**Perpendicular**	**ENE**	**Gutter**
3334	**Driveway**	**NNE**	**Pedestrian Access Route**
3336	**Perpendicular**	**NW**	**Ramp Landing**
3335	**Curb Ramp Required**	**SE**	**Access Route**

Sunset Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

949 Sunset Ave and **Accornero Ave**

813	**Curb Ramp Required**	**N**	**Access Route**
814	**Perpendicular**	**SE**	**Ramp Width**
815	**Perpendicular**	**SW**	**Compliant Curb Ramp**

1395 Sunset Ave and **Double Tree Way**

1512	**Perpendicular**	**NE**	**Ramp Slope**
1513	**Perpendicular**	**NW**	**Ramp Slope**
1515	**Perpendicular**	**SE**	**Ramp Landing**
1514	**Perpendicular**	**SW**	**Ramp Slope**

886 Sunset Ave and **El Rancho Dr**

800	**Perpendicular**	**NE**	**Compliant Curb Ramp**
801	**Perpendicular**	**NW**	**Ramp Landing**
802	**Curb Ramp Required**	**S**	**Access Route**

935 Sunset Ave and **Foster Ave**

919	**Parallel**	**NE**	**Ramp Landing**
920	**Perpendicular**	**NW**	**Ramp Landing**

896 Sunset Ave and **Liberty Ln**

1386	**Perpendicular**	**E**	**Ramp Flare**
1385	**Perpendicular**	**NW**	**Ramp Slope**
1384	**Perpendicular**	**SW**	**Ramp Landing**

316 Sunset Ave and **Mainberry Dr**

657	**Perpendicular**	**NE**	**Ramp Landing**
656	**Perpendicular**	**NW**	**Ramp Width**
658	**Perpendicular**	**SE**	**Gutter**
659	**Perpendicular**	**SW**	**Compliant Curb Ramp**

1027 Sunset Ave and **N Granada Dr**

1620	**Perpendicular**	**NE**	**Ramp Slope**

1619	**Perpendicular**	**NW**	**Ramp Slope**
1621	**Perpendicular**	**SE**	**Compliant Curb Ramp**
1618	**Perpendicular**	**SW**	**Ramp Landing**

885 Sunset Ave and **N Schnoor Ave**

790	**Parallel**	**NE**	**Ramp Cross Slope**
791	**Parallel**	**NW**	**Ramp Cross Slope**
793	**Parallel**	**SE**	**Ramp Cross Slope**
792	**Parallel**	**SW**	**Ramp Landing**

1326 Sunset Ave and **Orchard Ave**

809	**Perpendicular**	**NE**	**Compliant Curb Ramp**
810	**Perpendicular**	**NW**	**Compliant Curb Ramp**
811	**Perpendicular**	**SE**	**Ramp Flare**
812	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

934 Sunset Ave and **Park Ln**

969	**Parallel**	**NE**	**Ramp Landing**
970	**Perpendicular**	**SE**	**Ramp Landing**
968	**Curb Ramp Required**	**W**	**Access Route**

948 Sunset Ave and **Paul Ave**

797	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
798	**Perpendicular**	**SE**	**Compliant Curb Ramp**
799	**Perpendicular**	**SW**	**Compliant Curb Ramp**

944 Sunset Ave and **Pine St**

916	**Island-Cut Through**	**N**	**Detectable Warning Surface**
915	**Parallel**	**NW**	**Detectable Warning Surface**
913	**Perpendicular**	**SE**	**Ramp Landing**
914	**Perpendicular**	**SW**	**Compliant Curb Ramp**

315 Sunset Ave and **Sundance Ln**

1673	**Perpendicular**	**NE**	**Ramp Slope**
1674	**Perpendicular**	**NW**	**Ramp Slope**
1672	**Perpendicular**	**SE**	**Detectable Warnings**
1675	**Perpendicular**	**SW**	**Ramp Slope**

220 Sunset Ave and **Sunset Ave**

1003	**Curb Ramp Required**	**E**	**Access Route**
1002	**Curb Ramp Required**	**W**	**Access Route**

927 Sunset Ave and **W 4Th St**

990	**Perpendicular**	**E**	**Ramp Landing**
989	**Curb Ramp Required**	**N**	**Access Route**
988	**Perpendicular**	**S**	**Ramp Landing**

1328 Sunset Ave and **Westberry Dr**

1437	**Perpendicular**	**NE**	**Ramp Slope**
1438	**Perpendicular**	**NW**	**Ramp Slope**
1440	**Perpendicular**	**SE**	**Ramp Landing**
1439	**Perpendicular**	**SW**	**Ramp Slope**

1312 Sunset Ave and **Williams Ave**

819	**Perpendicular**	**NE**	**Compliant Curb Ramp**
818	**Perpendicular**	**NW**	**Compliant Curb Ramp**
817	**Perpendicular**	**SE**	**Ramp Landing**
816	**Perpendicular**	**SW**	**Compliant Curb Ramp**

1313 Sunset Ave and **Willis Ave**

821	**Perpendicular**	**NE**	**Ramp Flare**
820	**Perpendicular**	**NW**	**Compliant Curb Ramp**
822	**Perpendicular**	**SE**	**Compliant Curb Ramp**
823	**Combination**	**SW**	**Ramp Cross Slope**

Susan Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

34 Susan Ln and **Sonora St**

3888	**Curb Ramp Required**	**E**	**Access Route**
3886	**Perpendicular**	**NW**	**Ramp Landing**
3887	**Perpendicular**	**SW**	**Ramp Slope**

Taft Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1487 Taft Dr and

1975	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1976	**Perpendicular**	**NW**	**Ramp Slope**
1977	**Perpendicular**	**SW**	**Ramp Slope**

Tangerine Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1466 Tangerine Ave and **Citrus Way**

3701	**Perpendicular**	**E**	**Ramp Slope**
3699	**Perpendicular**	**N**	**Detectable Warnings**
3700	**Curb Ramp Required**	**W**	**Access Route**

1470 Tangerine Ave and **Mango Ave**

3742	**Curb Ramp Required**	**SW**	**Access Route**

538 Tangerine Ave and **Parkwood Ave**

2998	**Perpendicular**	**NE**	**Ramp Transition**
3001	**Perpendicular**	**NW**	**Ramp Slope**
2999	**Perpendicular**	**SE**	**Ramp Transition**
3000	**Perpendicular**	**SW**	**Ramp Transition**

1596 Tangerine Ave and **Stanford Ave**

3684	**Perpendicular**	**NE**	**Ramp Slope**
3685	**Curb Ramp Required**	**SW**	**Access Route**

617 Tangerine Ave and **Valencia Ave**

3716	**Perpendicular**	**E**	**Detectable Warnings**
3717	**Perpendicular**	**N**	**Detectable Warnings**
3719	**Perpendicular**	**S**	**Ramp Landing**
3718	**Perpendicular**	**W**	**Ramp Landing**

Terrace Pl

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1250 Terrace Pl and **W Central Ave**

1020	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
1019	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1021	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Third St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1344 Third St and **Hilton St**

588	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
587	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
589	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
586	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1345 Third St and **Krest St**

585	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
584	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
582	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
583	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

424 Third St and **Shannon Ave**

571	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
568	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
570	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
569	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Tiburon Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

432 Tiburon Way and **Fairfield Way**

2346	**Curb Ramp Required**	**NW**	**Access Route**
2348	**Perpendicular**	**SE**	**Ramp Slope**
2347	**Perpendicular**	**SW**	**Ramp Transition**

431 Tiburon Way and **Hampton Dr**

1681	**Perpendicular**	**NE**	**Ramp Slope**
1680	**Perpendicular**	**NW**	**Ramp Slope**
1679	**Curb Ramp Required**	**S**	**Access Route**

Timberline Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1140 Timberline Dr and Cedar Creek Ln			
1536	**Perpendicular**	**NE**	**Ramp Landing**
1537	**Perpendicular**	**SE**	**Ramp Landing**
1535	**Curb Ramp Required**	**W**	**Access Route**
1244 Timberline Dr and Ren Way			
1865	**Curb Ramp Required**	**E**	**Access Route**
1864	**Perpendicular**	**NW**	**Gutter**
1866	**Perpendicular**	**SW**	**Ramp Slope**
624 Timberline Dr and Westgate Dr			
1688	**Curb Ramp Required**	**E**	**Access Route**
1689	**Perpendicular**	**NW**	**Ramp Slope**
1690	**Perpendicular**	**SW**	**Ramp Landing**
1242 Timberline Dr and Winter Way			
1862	**Perpendicular**	**NE**	**Ramp Landing**
1863	**Perpendicular**	**SE**	**Ramp Transition**
1861	**Curb Ramp Required**	**W**	**Access Route**

Toledo Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1458 Toledo Way and			
2173	**Perpendicular**	**NE**	**Ramp Landing**
2174	**Perpendicular**	**NW**	**Ramp Landing**
2172	**Curb Ramp Required**	**S**	**Access Route**
1490 Toledo Way and Raymond Rd			
2169	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
2170	**Perpendicular**	**NW**	**Ramp Landing**
2171	**Perpendicular**	**SW**	**Ramp Landing**

Toronado Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
466 Toronado Dr and E Cleveland Ave			
1213	**Perpendicular**	**NE**	**Ramp Slope**
1212	**Perpendicular**	**NW**	**Gutter**
465 Toronado Dr and W Sherwood Way			
1237	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1239	**Perpendicular**	**SE**	**Gutter**
1238	**Perpendicular**	**SW**	**Gutter**

Torres Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
285 Torres Way and E Lincoln Ave			
1180	**Curb Ramp Required**	**N**	**Access Route**
1181	**Parallel**	**SE**	**Ramp Landing**
1182	**Parallel**	**SW**	**Ramp Landing**
284 Torres Way and W South St			
1175	**Perpendicular**	**NE**	**Gutter**
1176	**Parallel**	**NW**	**Ramp Landing**
1174	**Curb Ramp Required**	**S**	**Access Route**

Toschi Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
592 Toschi Dr and Cherry Tree Dr			
2677	**Perpendicular**	**NE**	**Detectable Warning Surface**
2676	**Perpendicular**	**NW**	**Ramp Slope**
2678	**Curb Ramp Required**	**SE**	**Access Route**
487 Toschi Dr and Pear Tree Dr			
2660	**Perpendicular**	**NE**	**Ramp Slope**
2696	**Curb Ramp Required**	**NW**	**Access Route**
2695	**Perpendicular**	**SW**	**Ramp Slope**
488 Toschi Dr and W Almond Ave			
2658	**Curb Ramp Required**	**NW**	**Access Route**
2659	**Perpendicular**	**SE**	**Ramp Slope**
2657	**Perpendicular**	**SW**	**Ramp Slope**

Tozer St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
348 Tozer St and Cedar St			
3591	**Driveway**	**E**	**Pedestrian Access Route**
1066 Tozer St and Lada Ave			
3589	**Perpendicular**	**NE**	**Gutter**
3590	**Curb Ramp Required**	**NW**	**Access Route**
3588	**Perpendicular**	**SE**	**Ramp Width**
350 Tozer St and Mira Loma Way			
3463	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3462	**Perpendicular**	**NW**	**Ramp Landing**
3461	**Perpendicular**	**SW**	**Ramp Width**
349 Tozer St and Mono St			

3592	**Driveway**	**E**	**Pedestrian Access Route**

Trabon Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
790 Trabon Way and **Double Tree Way**			
1458	**Perpendicular**	**NE**	**Ramp Slope**
1459	**Perpendicular**	**NW**	**Ramp Landing**
1457	**Curb Ramp Required**	**S**	**Access Route**

Trail Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
137 Trail Way and **Bridge Way**			
3389	**Perpendicular**	**NE**	**Gutter**
3387	**Perpendicular**	**SE**	**Gutter**
3388	**Curb Ramp Required**	**SW**	**Access Route**
136 Trail Way and **Rd 28**			
3393	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
3390	**Perpendicular**	**NW**	**Ramp Slope**
3392	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3391	**Perpendicular**	**SW**	**Ramp Slope**

Trevor Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1024 Trevor Way and **Stephanie Ln**			
2520	**Perpendicular**	**NE**	**Ramp Slope**
2519	**Perpendicular**	**NW**	**Gutter**
2518	**Curb Ramp Required**	**SW**	**Access Route**

Truman Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1514 Truman Dr and **Pierce Ln**			
1939	**Perpendicular**	**NW**	**Ramp Landing**
1940	**Curb Ramp Required**	**SE**	**Access Route**
129 Truman Dr and **Taft Dr**			
1971	**Perpendicular**	**NE**	**Ramp Landing**
1972	**Perpendicular**	**SE**	**Ramp Landing**
1970	**Curb Ramp Required**	**W**	**Access Route**

Tulare St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
427 Tulare St and Daulton Ave			
4095	**Curb Ramp Required**	**E**	**Access Route**
4094	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
164 Tulare St and E Clark St			
2229	**Curb Ramp Required**	**E**	**Access Route**
2231	**Perpendicular**	**NW**	**Ramp Landing**
2230	**Perpendicular**	**SW**	**Ramp Slope**
426 Tulare St and E Lincoln Ave			
4097	**Perpendicular**	**NE**	**Ramp Landing**
4099	**Perpendicular**	**NW**	**Ramp Landing**
4096	**Perpendicular**	**SE**	**Ramp Landing**
4098	**Perpendicular**	**SW**	**Ramp Landing**
238 Tulare St and E Sherwood Way			
2204	**Perpendicular**	**NE**	**Ramp Landing**
2205	**Perpendicular**	**SE**	**Ramp Landing**
2203	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
239 Tulare St and Mission Ave			
2208	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2207	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2206	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
536 Tulare St and Tulare St			
2220	**Perpendicular**	**NE**	**Ramp Slope**
2219	**Perpendicular**	**SE**	**Ramp Slope**
2218	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
163 Tulare St and Wrenwood Way			
2223	**Perpendicular**	**NE**	**Ramp Slope**
2222	**Perpendicular**	**SE**	**Ramp Slope**
2221	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Tyler Ln

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
355 Tyler Ln and Coolidge St			
1985	**Perpendicular**	**NE**	**Ramp Landing**
1986	**Perpendicular**	**NW**	**Ramp Landing**
1984	**Curb Ramp Required**	**S**	**Access Route**
1518 Tyler Ln and Madison Dr			
1994	**Perpendicular**	**NE**	**Ramp Landing**
1993	**Curb Ramp Required**	**SW**	**Access Route**

1517 Tyler Ln and **Truman Dr**

1974	**Perpendicular**	**NW**	**Ramp Landing**
1973	**Curb Ramp Required**	**SE**	**Access Route**

Ula St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1175 Ula St and **Foster Ave**			
923	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
921	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
922	**Curb Ramp Required**	**W**	**Access Route**

University Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1225 University Ave and **Hayes Ct**			
747	**Curb Ramp Required**	**N**	**Access Route**
748	**Perpendicular**	**SE**	**Ramp Slope**
749	**Perpendicular**	**SW**	**Ramp Slope**
1377 University Ave and **Orchard Ave**			
741	**Perpendicular**	**NE**	**Ramp Slope**
740	**Perpendicular**	**NW**	**Ramp Landing**
742	**Perpendicular**	**SE**	**Ramp Slope**
743	**Perpendicular**	**SW**	**Ramp Slope**
998 University Ave and **Willis Ave**			
856	**Curb Ramp Required**	**N**	**Access Route**
858	**Perpendicular**	**SE**	**Ramp Slope**
857	**Perpendicular**	**SW**	**Ramp Slope**

Valencia Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1470 Valencia Ave and **Mango Ave**			
3740	**Perpendicular**	**NE**	**Gutter**
3741	**Perpendicular**	**NW**	**Ramp Transition**
21 Valencia Ave and **Navel Ave**			
2989	**Perpendicular**	**NE**	**Ramp Transition**
2990	**Perpendicular**	**NW**	**Ramp Transition**
2992	**Perpendicular**	**SE**	**Ramp Transition**
2991	**Perpendicular**	**SW**	**Ramp Slope**
1464 Valencia Ave and **Pecan Ave**			
2979	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2978	**Perpendicular**	**NW**	**Compliant Curb Ramp**
2976	**Perpendicular**	**SE**	**Ramp Slope**

2977	**Perpendicular**	**SW**	**Compliant Curb Ramp**

19 Valencia Ave and **Perkins Ave**

3022	**Perpendicular**	**NE**	**Ramp Transition**
3021	**Perpendicular**	**NW**	**Ramp Slope**
3019	**Perpendicular**	**SE**	**Ramp Transition**
3020	**Perpendicular**	**SW**	**Ramp Transition**

704 Valencia Ave and **San Bruno Ave**

3720	**Perpendicular**	**ENE**	**Gutter**
3721	**Perpendicular**	**ESE**	**Gutter**
3727	**Perpendicular**	**NNE**	**Gutter**
3726	**Perpendicular**	**NNW**	**Gutter**
3722	**Perpendicular**	**SSE**	**Gutter**
3723	**Perpendicular**	**SSW**	**Gutter**
3725	**Perpendicular**	**WNW**	**Detectable Warnings**
3724	**Perpendicular**	**WSW**	**Detectable Warnings**

705 Valencia Ave and **San Ramon Ave**

3713	**Perpendicular**	**NE**	**Ramp Landing**
3714	**Perpendicular**	**SE**	**Ramp Landing**
3715	**Curb Ramp Required**	**SW**	**Access Route**

20 Valencia Ave and **Saunders Ave**

2974	**Perpendicular**	**NE**	**Ramp Slope**
2975	**Perpendicular**	**NW**	**Ramp Transition**
2973	**Perpendicular**	**SE**	**Ramp Transition**
2972	**Perpendicular**	**SW**	**Ramp Transition**

Valley Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1191 Valley Way and **National Ave**

1657	**Curb Ramp Required**	**N**	**Access Route**
1659	**Perpendicular**	**SE**	**Ramp Landing**
1658	**Perpendicular**	**SW**	**Ramp Landing**

715 Valley Way and **Pinewood Dr**

1594	**Curb Ramp Required**	**E**	**Access Route**
1595	**Perpendicular**	**NW**	**Ramp Landing**
1596	**Perpendicular**	**SW**	**Ramp Landing**

714 Valley Way and **Riverview Dr**

1591	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1593	**Perpendicular**	**SE**	**Ramp Landing**
1592	**Perpendicular**	**SW**	**Ramp Slope**

853 Valley Way and **Third St**

1710	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1709	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1711	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

852 Valley Way and **Willow Ct**

1668	**Perpendicular**	**NE**	**Ramp Landing**
1667	**Perpendicular**	**SE**	**Ramp Landing**
1666	**Curb Ramp Required**	**W**	**Access Route**

Varbella Pk

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1565 Varbella Pk and

3040	**Curb Ramp Required**	**NE**	**Access Route**
3039	**Perpendicular**	**SW**	**Gutter**

628 Varbella Pk and **Las Casas Ln**

3175	**Perpendicular**	**NE**	**Ramp Slope**
3176	**Curb Ramp Required**	**NW**	**Access Route**
3177	**Perpendicular**	**SE**	**Ramp Slope**

Venturi Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1161 Venturi Ave and **El Rancho Dr**

780	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
781	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
782	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1319 Venturi Ave and **N Schnoor Ave**

783	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
785	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
784	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
786	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

123 Venturi Ave and **Shannon Ave**

680	**Perpendicular**	**NE**	**Ramp Landing**
681	**Perpendicular**	**SE**	**Ramp Slope**

Verde Mesa Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

177 Verde Mesa Way and **Corona Dr**

3452	**Perpendicular**	**NE**	**Gutter**
3450	**Perpendicular**	**NW**	**Ramp Width**
3451	**Curb Ramp Required**	**SW**	**Access Route**

Via Cerioni

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

155 Via Cerioni and **Sunset Ave**

1436	**Perpendicular**	**NE**	**Ramp Landing**
1433	**Perpendicular**	**NW**	**Ramp Landing**
1435	**Perpendicular**	**SE**	**Ramp Landing**
1434	**Perpendicular**	**SW**	**Ramp Landing**

156 Via Cerioni and **Via Capitola**

1427	**Curb Ramp Required**	**E**	**Access Route**
1429	**Perpendicular**	**NW**	**Ramp Landing**
1428	**Perpendicular**	**SW**	**Ramp Landing**

Via Santa Barbara

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

231 Via Santa Barbara and **Caitlan Drive**

1431	**Perpendicular**	**NE**	**Ramp Landing**
1432	**Perpendicular**	**SE**	**Ramp Landing**
1430	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1607 Via Santa Barbara and **Via Ceroni**

4495	**Perpendicular**	**NW**	**Ramp Slope**
4497	**Driveway**	**SE**	**Pedestrian Access Route**
4496	**Perpendicular**	**SW**	**Ramp Slope**

Vineyard Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1211 Vineyard Ave and **9Th St**

4316	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4318	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
4317	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1168 Vineyard Ave and **Cross St**

4359	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
4358	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
4360	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1167 Vineyard Ave and **Washington St**

3260	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
3258	**Perpendicular**	**N**	**Ramp Landing**
3259	**Curb Ramp Required**	**W**	**Access Route**

W 1St St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1368 W 1St St and **N G St**

1008	**Combination**	**E**	**Ramp Flare**
1011	**Combination**	**N**	**Ramp Slope**

1009	**Perpendicular**	**S**	**Ramp Landing**
1010	**Perpendicular**	**W**	**Ramp Landing**

W 1Sth St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
930 W 1Sth St and **N H St**			
1027	**Perpendicular**	**E**	**Ramp Landing**
1026	**Parallel**	**N**	**Gutter**
1025	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

W 2Nd St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1343 W 2Nd St and **N G St**			
1004	**Combination**	**E**	**Ramp Slope**
1007	**Combination**	**N**	**Ramp Flare**
1005	**Combination**	**S**	**Ramp Slope**
1006	**Combination**	**W**	**Gutter**
961 W 2Nd St and **N H St**			
1031	**Combination**	**E**	**Ramp Flare**
1030	**Perpendicular**	**N**	**Ramp Landing**
1029	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
1028	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
943 W 2Nd St and **N Park Dr**			
953	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
954	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
955	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

W 3Rd St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1299 W 3Rd St and **N G St**			
1037	**Perpendicular**	**E**	**Ramp Slope**
1038	**Combination**	**N**	**Ramp Width**
1035	**Combination**	**S**	**Ramp Landing**
1036	**Curb Ramp Required**	**W**	**Access Route**
785 W 3Rd St and **N H St**			
1033	**Combination**	**E**	**Ramp Slope**
1034	**Combination**	**S**	**Ramp Landing**
1032	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**
280 W 3Rd St and **W 3Rd St**			
1086	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1085	**Driveway**	**S**	**Pedestrian Access Route**

W 4Th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1391 W 4Th St and **N Gateway Dr**			
1078	**Parallel**	**E**	**Detectable Warning Surface**
1077	**Parallel**	**N**	**Detectable Warning Surface**
1079	**Perpendicular**	**S**	**Gutter**
1080	**Perpendicular**	**W**	**Ramp Landing**
795 W 4Th St and **N H St**			
1098	**Parallel**	**E**	**Ramp Landing**
1095	**Perpendicular**	**N**	**Ramp Landing**
1097	**Parallel**	**S**	**Ramp Landing**
1096	**Perpendicular**	**W**	**Compliant Curb Ramp**
612 W 4Th St and **N J St**			
987	**Parallel**	**E**	**Ramp Landing**
986	**Island-Cut Through**	**N**	**Compliant Curb Ramp**
985	**Perpendicular**	**NE**	**Gutter**
984	**Perpendicular**	**NW**	**Gutter**
982	**Parallel**	**S**	**Ramp Cross Slope**
983	**Perpendicular**	**W**	**Detectable Warning Surface**

W 6th St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
666 W 6th St and **S Gateway Dr**			
4262	**Perpendicular**	**E**	**Ramp Landing**
4259	**Perpendicular**	**N**	**Ramp Landing**
4261	**Perpendicular**	**S**	**Ramp Landing**
4260	**Perpendicular**	**W**	**Ramp Width**

W Almond Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
646 W Almond Ave and **Hazelnut Dr**			
2633	**Curb Ramp Required**	**NW**	**Access Route**
2634	**Perpendicular**	**SE**	**Ramp Landing**
2632	**Perpendicular**	**SW**	**Ramp Landing**

W Central Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1051 W Central Ave and **Central Pl**			
830	**Curb Ramp Required**	**E**	**Access Route**

832	**Perpendicular**	**NW**	**Ramp Landing**
831	**Perpendicular**	**SW**	**Ramp Slope**

980 W Central Ave and **Lillian St**

881	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
880	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
882	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

875 W Central Ave and **N G St**

1017	**Curb Ramp Required**	**E**	**Access Route**
1016	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1018	**Perpendicular**	**S**	**Ramp Slope**

1050 W Central Ave and **Orchard Ave**

828	**Perpendicular**	**NE**	**Ramp Landing**
829	**Perpendicular**	**SE**	**Ramp Slope**
827	**Curb Ramp Required**	**W**	**Access Route**

748 W Central Ave and **Riverview Dr**

884	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
883	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
885	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

W Clark St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

380 W Clark St and **Country Club Dr**

3868	**Parallel**	**NE**	**Ramp Cross Slope**
3867	**Perpendicular**	**NW**	**Gutter**
3869	**Perpendicular**	**SE**	**Gutter**
3866	**Perpendicular**	**SW**	**Ramp Landing**

382 W Clark St and **Sonora St**

3914	**Curb Ramp Required**	**E**	**Access Route**
3916	**Perpendicular**	**NW**	**Ramp Width**
3915	**Perpendicular**	**SW**	**Ramp Slope**

381 W Clark St and **Taylor St**

3919	**Curb Ramp Required**	**N**	**Access Route**
3917	**Perpendicular**	**SE**	**Ramp Landing**
3918	**Perpendicular**	**SW**	**Gutter**

W Cleveland Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1523 W Cleveland Ave and

2447	**Perpendicular**	**NE**	**Ramp Landing**
2448	**Perpendicular**	**NW**	**Ramp Slope**
2449	**Perpendicular**	**SE**	**Ramp Slope**
2450	**Perpendicular**	**SW**	**Ramp Slope**

452 W Cleveland Ave and **East Loop**

2477	**Driveway**	**S**	**Pedestrian Access Route**

454 W Cleveland Ave and **Glade Ave**

2267	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2269	**Perpendicular**	**NW**	**Ramp Slope**
2268	**Curb Ramp Required**	**SE**	**Access Route**
2270	**Perpendicular**	**SW**	**Ramp Slope**

1113 W Cleveland Ave and **N Gateway Dr**

3934	**Parallel**	**NE**	**Ramp Cross Slope**
3935	**Perpendicular**	**NNW**	**Ramp Slope**
3939	**Perpendicular**	**SE**	**Detectable Warning Surface**
3938	**Perpendicular**	**SW**	**Ramp Landing**
3937	**Island-Cut Through**	**W**	**Detectable Warning Surface**
3936	**Perpendicular**	**WNW**	**Gutter**

394 W Cleveland Ave and **N Schnoor Ave**

2442	**Perpendicular**	**NE**	**Gutter**
2441	**Perpendicular**	**NW**	**Ramp Landing**
2443	**Perpendicular**	**SE**	**Ramp Landing**
2444	**Perpendicular**	**SW**	**Ramp Slope**

1425 W Cleveland Ave and **Sharon Bvd**

3933	**Parallel**	**NE**	**Ramp Cross Slope**
3932	**Perpendicular**	**SE**	**Ramp Slope**

453 W Cleveland Ave and **Stephanie Ln**

2453	**Perpendicular**	**NE**	**Ramp Slope**
2454	**Perpendicular**	**NW**	**Ramp Slope**
2451	**Perpendicular**	**SE**	**Ramp Landing**
2452	**Perpendicular**	**SW**	**Ramp Slope**

455 W Cleveland Ave and **Sundance Ln**

2476	**Perpendicular**	**NW**	**Ramp Slope**
2475	**Perpendicular**	**SE**	**Ramp Landing**

W El Monte Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

414 W El Monte Ct and **Monterey St**

359	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
358	**Perpendicular**	**NW**	**Ramp Slope**
357	**Perpendicular**	**SW**	**Ramp Slope**

W Park Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

924 W Park Dr and **Chateau Pl**

760	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
758	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
759	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1364 W Park Dr and **Claremont Dr**

755	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
756	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
754	**Curb Ramp Required**	**SE**	**Access Route**
757	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

344 W Park Dr and **Mainberry Dr**

644	**Perpendicular**	**NE**	**Ramp Landing**
643	**Perpendicular**	**NW**	**Ramp Slope**
645	**Perpendicular**	**SE**	**Ramp Landing**
642	**Perpendicular**	**SW**	**Ramp Slope**

1405 W Park Dr and **N Schnoor Ave**

688	**Curb Ramp Required**	**NE**	**Access Route**
685	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
687	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
686	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1333 W Park Dr and **Orchard Ave**

752	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
751	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
753	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
750	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

345 W Park Dr and **Royal Dr**

689	**Perpendicular**	**NE**	**Ramp Slope**
691	**Perpendicular**	**NW**	**Ramp Slope**
690	**Curb Ramp Required**	**S**	**Access Route**

343 W Park Dr and **Shannon Ave**

684	**Perpendicular**	**E**	**Ramp Landing**
682	**Curb Ramp Required**	**N**	**Access Route**
683	**Perpendicular**	**W**	**Ramp Slope**

W Roberts Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1382 W Roberts Ave and **N G St**

1012	**Combination**	**E**	**Ramp Landing**
1015	**Perpendicular**	**N**	**Ramp Landing**
1013	**Combination**	**S**	**Ramp Cross Slope**
1014	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

958 W Roberts Ave and **N H St**

1024	**Parallel**	**E**	**Ramp Landing**
1023	**Perpendicular**	**N**	**Ramp Landing**
1022	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1173 W Roberts Ave and **N Pine St**

897	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
899	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
896	**Curb Ramp Required**	**SE**	**Access Route**
898	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

W Sherwood Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
523 W Sherwood Way and **Davis St**			
1240	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1242	**Perpendicular**	**SE**	**Ramp Slope**
1241	**Perpendicular**	**SW**	**Detectable Warnings**
522 W Sherwood Way and **Fresno St**			
2264	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2263	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2261	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2262	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
526 W Sherwood Way and **N D St**			
1337	**Perpendicular**	**NE**	**Ramp Slope**
1336	**Perpendicular**	**NW**	**Ramp Slope**
1338	**Perpendicular**	**SE**	**Ramp Slope**
1339	**Perpendicular**	**SW**	**Ramp Landing**
524 W Sherwood Way and **Owens St**			
1234	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1233	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1235	**Perpendicular**	**SE**	**Gutter**
1236	**Perpendicular**	**SW**	**Ramp Slope**
525 W Sherwood Way and **Sonora St**			
1331	**Perpendicular**	**NE**	**Detectable Warnings**
1330	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1332	**Perpendicular**	**SE**	**Ramp Landing**
1329	**Perpendicular**	**SW**	**Ramp Slope**

W South St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
504 W South St and **Bloker St**			
1267	**Perpendicular**	**NE**	**Ramp Slope**
1268	**Parallel**	**NW**	**Ramp Landing**
1266	**Curb Ramp Required**	**S**	**Access Route**
729 W South St and **E Lincoln Ave**			
1132	**Perpendicular**	**NE**	**Gutter**
1131	**Perpendicular**	**NW**	**Ramp Landing**

1129	**Perpendicular**	**SE**	**Gutter**
1130	**Parallel**	**SW**	**Ramp Landing**

501 W South St and **N Lake St**

4071	**Perpendicular**	**E**	**Ramp Slope**
4072	**Perpendicular**	**NW**	**Ramp Landing**
4070	**Perpendicular**	**SW**	**Ramp Landing**

503 W South St and **Sierra St**

1150	**Perpendicular**	**NE**	**Gutter**
1149	**Perpendicular**	**NW**	**Gutter**
1151	**Perpendicular**	**SE**	**Ramp Flare**
1152	**Perpendicular**	**SW**	**Ramp Landing**

500 W South St and **Sonora St**

1171	**Perpendicular**	**NE**	**Ramp Flare**
1172	**Perpendicular**	**NW**	**Ramp Flare**
1170	**Perpendicular**	**SE**	**Gutter**
1173	**Perpendicular**	**SW**	**Gutter**

W Yosemite Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

775 W Yosemite Ave and **N G St**

1111	**Perpendicular**	**N**	**Ramp Landing**
1109	**Perpendicular**	**S**	**Ramp Slope**
1110	**Perpendicular**	**W**	**Ramp Landing**

1399 W Yosemite Ave and **N Q St**

63	**Perpendicular**	**ESE**	**Compliant Curb Ramp**
64	**Perpendicular**	**NE**	**Compliant Curb Ramp**
65	**Perpendicular**	**NW**	**Ramp Slope**
62	**Island-Perpendicular**	**SE**	**Ramp Landing**
60	**Parallel**	**SSW**	**Ramp Cross Slope**
61	**Island-Parallel**	**SW**	**Ramp Landing**

776 W Yosemite Ave and **S H St**

1107	**Perpendicular**	**E**	**Ramp Landing**
1106	**Curb Ramp Required**	**NW**	**Access Route**
1108	**Parallel**	**S**	**Ramp Cross Slope**

1327 W Yosemite Ave and **S I St**

154	**Combination**	**E**	**Ramp Landing**
153	**Perpendicular**	**N**	**Ramp Width**
155	**Perpendicular**	**S**	**Ramp Flare**
156	**Perpendicular**	**W**	**Ramp Flare**

1378 W Yosemite Ave and **S J St**

149	**Combination**	**E**	**Ramp Landing**
150	**Combination**	**N**	**Ramp Landing**
152	**Combination**	**S**	**Ramp Flare**

	151	**Combination**	**W**	**Ramp Landing**

1445 W Yosemite Ave and **S M St**

	104	**Combination**	**NE**	**Ramp Slope**
	107	**Combination**	**NW**	**Compliant Curb Ramp**
	105	**Combination**	**SE**	**Ramp Landing**
	106	**Combination**	**SW**	**Ramp Landing**

Walnut St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1437 Walnut St and **Cortopassi St**

	3560	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
	3561	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
	3563	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
	3562	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1185 Walnut St and **Madera Ave**

	3566	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
	3564	**Perpendicular**	**NW**	**Ramp Landing**
	3565	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Washington St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1303 Washington St and **Lilly St**

	3254	**Perpendicular**	**E**	**Ramp Landing**
	3257	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
	3255	**Perpendicular**	**S**	**Ramp Slope**
	3256	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1386 Washington St and **Magnolia St**

	3229	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
	3232	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
	3230	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
	3231	**Curb Ramp Required**	**W**	**Access Route**

793 Washington St and **Malone St**

	3277	**Perpendicular**	**E**	**Ramp Flare**
	3278	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**
	3279	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

969 Washington St and **Washington Ct**

	3234	**Perpendicular**	**E**	**Ramp Slope**
	3235	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
	3233	**Perpendicular**	**S**	**Ramp Slope**

Wawona Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
669 Wawona Ct and Monterey St			
342	**Driveway**	**E**	**Pedestrian Access Route**
344	**Perpendicular**	**NW**	**Ramp Slope**
343	**Perpendicular**	**SW**	**Gutter**

Wessmith Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
393 Wessmith Way and Fresno St			
2245	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2242	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2244	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2243	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
392 Wessmith Way and Merced St			
2251	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
2250	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2252	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
2253	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1112 Wessmith Way and Tulare St			
2200	**Curb Ramp Required**	**E**	**Access Route**
2202	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
2201	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Westberry Bvd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
851 Westberry Bvd and Baron St			
1443	**Curb Ramp Required**	**E**	**Access Route**
1442	**Perpendicular**	**NW**	**Ramp Slope**
1441	**Perpendicular**	**SW**	**Ramp Slope**
997 Westberry Bvd and Cambria Ave			
1528	**Curb Ramp Required**	**E**	**Access Route**
1529	**Perpendicular**	**NW**	**Ramp Slope**
1530	**Perpendicular**	**SW**	**Ramp Slope**
850 Westberry Bvd and Crown Ln			
1447	**Perpendicular**	**NE**	**Ramp Landing**
1449	**Perpendicular**	**SE**	**Ramp Landing**
1448	**Curb Ramp Required**	**W**	**Access Route**
1212 Westberry Bvd and Ren Way			
1869	**Perpendicular**	**NE**	**Ramp Landing**

1867	**Perpendicular**	**SE**	**Ramp Landing**
1868	**Curb Ramp Required**	**W**	**Access Route**

1229 Westberry Bvd and **State St**

1445	**Curb Ramp Required**	**E**	**Access Route**
1446	**Perpendicular**	**NW**	**Ramp Slope**
1444	**Perpendicular**	**SW**	**Ramp Slope**

541 Westberry Bvd and **Summer Ln**

1682	**Curb Ramp Required**	**E**	**Access Route**
1683	**Perpendicular**	**NW**	**Ramp Landing**
1684	**Perpendicular**	**SW**	**Ramp Landing**

573 Westberry Bvd and **Todd St**

1450	**Curb Ramp Required**	**E**	**Access Route**
1452	**Perpendicular**	**NW**	**Ramp Slope**
1451	**Perpendicular**	**SW**	**Ramp Landing**

540 Westberry Bvd and **Westgate Dr**

1686	**Perpendicular**	**NE**	**Ramp Slope**
1687	**Perpendicular**	**SE**	**Ramp Landing**
1685	**Curb Ramp Required**	**W**	**Access Route**

Westgate Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

553 Westgate Dr and **Autumn Rd**

1744	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1743	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1742	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

91 Westgate Dr and **Timberline Dr**

1691	**Curb Ramp Required**	**NW**	**Access Route**
1692	**Perpendicular**	**SE**	**Ramp Landing**

904 Westgate Dr and **Westberry Bvd**

1693	**Curb Ramp Required**	**E**	**Access Route**
1695	**Perpendicular**	**NW**	**Ramp Landing**
1694	**Perpendicular**	**SW**	**Ramp Slope**

Williams Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1131 Williams Ave and **Fifth St**

518	**Curb Ramp Required**	**E**	**Access Route**
513	**Curb Ramp Required**	**NE**	**Access Route**
516	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
514	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
517	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
515	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

757 Williams Ave and **Fourth St**

485	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
484	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
483	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

781 Williams Ave and **Jennings St**

482	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
477	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
480	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
478	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
481	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
479	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

1383 Williams Ave and **Princeton Ave**

848	**Perpendicular**	**NE**	**Ramp Slope**
851	**Perpendicular**	**NW**	**Ramp Slope**
849	**Perpendicular**	**SE**	**Ramp Flare**
850	**Perpendicular**	**SW**	**Ramp Slope**

1028 Williams Ave and **Third St**

446	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
449	**Perpendicular**	**NW**	**Gutter**
447	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
448	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1298 Williams Ave and **University Ave**

855	**Perpendicular**	**NE**	**Ramp Slope**
852	**Perpendicular**	**NW**	**Ramp Slope**
854	**Perpendicular**	**SE**	**Ramp Slope**
853	**Perpendicular**	**SW**	**Ramp Landing**

1434 Williams Ave and **Venturi Ave**

773	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
774	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
775	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
772	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1297 Williams Ave and **W Park Dr**

762	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
764	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
763	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

Willis Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

955 Willis Ave and **Fifth St**

521	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
520	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
519	**No Sidewalk, Curb Ramp Not Required**	**S**	**Pedestrian Access Route**

1375 Willis Ave and **National Ave**

438	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
439	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
441	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
440	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1428 Willis Ave and **Third St**

451	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
450	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
452	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
453	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1184 Willis Ave and **Venturi Ave**

768	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
770	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
771	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
769	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1103 Willis Ave and **W Park Dr**

766	**No Sidewalk, Curb Ramp Not Required**	**E**	**Pedestrian Access Route**
765	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
767	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

1102 Willis Ave and **W Roberts Ave**

861	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
860	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
859	**Curb Ramp Required**	**W**	**Access Route**

Willow Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

844 Willow Dr and **Fall Ave**

1640	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1642	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1641	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

845 Willow Dr and **Holiday Way**

1643	**No Sidewalk, Curb Ramp Not Required**	**N**	**Pedestrian Access Route**
1639	**No Sidewalk, Curb Ramp Not Required**	**NE**	**Pedestrian Access Route**
1644	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
1645	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**
1637	**No Sidewalk, Curb Ramp Not Required**	**W**	**Pedestrian Access Route**

Wilson Ave

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

311 Wilson Ave and **Davis St**

1221	**Perpendicular**	**NE**	**Ramp Slope**
1222	**Perpendicular**	**NW**	**Ramp Slope**
1220	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**

1223	**Perpendicular**	**SW**	**Ramp Slope**

312 Wilson Ave and **Owens St**

1206	**Perpendicular**	**NE**	**Ramp Slope**
1204	**No Sidewalk, Curb Ramp Not Required**	**NW**	**Pedestrian Access Route**
1207	**Parallel**	**SE**	**Ramp Cross Slope**
1205	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Windsox Ct

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

841 Windsox Ct and **Paintbrush Dr**

1476	**Curb Ramp Required**	**NE**	**Access Route**
1475	**Perpendicular**	**S**	**Ramp Slope**
1477	**Perpendicular**	**W**	**Ramp Slope**

Winter Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1130 Winter Way and **Kent Dr**

1701	**Perpendicular**	**NE**	**Ramp Landing**
1700	**Perpendicular**	**NW**	**Ramp Landing**
1699	**Curb Ramp Required**	**S**	**Access Route**

Wolftrap St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

165 Wolftrap St and **Summer Ln**

1843	**Under Construction**	**NW**	**Existing Curb Ramp**
1844	**Curb Ramp Required**	**SW**	**Access Route**

Woodlands Dr

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:

1411 Woodlands Dr and **Forest Ln**

1520	**Perpendicular**	**NE**	**Ramp Landing**
1521	**Perpendicular**	**NW**	**Ramp Landing**
1523	**Perpendicular**	**SE**	**Ramp Landing**
1522	**Perpendicular**	**SW**	**Ramp Landing**

1412 Woodlands Dr and **Hillcrest Ct**

1516	**Perpendicular**	**NE**	**Ramp Landing**
1517	**Perpendicular**	**NW**	**Ramp Landing**
1519	**Perpendicular**	**SE**	**Ramp Landing**
1518	**Perpendicular**	**SW**	**Ramp Slope**

Wrenwood Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
565 Wrenwood Way and Kern St			
2226	**Perpendicular**	**NE**	**Ramp Slope**
2225	**Perpendicular**	**NW**	**Ramp Slope**
2224	**Curb Ramp Required**	**S**	**Access Route**

Yeager Rd

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
993 Yeager Rd and Falcon Dr			
3789	**Driveway**	**N**	**Pedestrian Access Route**
3791	**No Sidewalk, Curb Ramp Not Required**	**SE**	**Pedestrian Access Route**
3790	**No Sidewalk, Curb Ramp Not Required**	**SW**	**Pedestrian Access Route**

Zak Way

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
1046 Zak Way and Diane Way			
1545	**Curb Ramp Required**	**E**	**Access Route**
1546	**Perpendicular**	**NW**	**Ramp Landing**
1547	**Perpendicular**	**SW**	**Ramp Landing**

Zapata St

Intersection ID and Street Names:	Type:	Orientation:	Specific Item:
630 Zapata St and E Ellis St			
2060	**Curb Ramp Required**	**N**	**Access Route**
2061	**Perpendicular**	**SE**	**Ramp Landing**
2062	**Perpendicular**	**SW**	**Ramp Slope**

Total Cost for County Curb Ramps: **$19,209,500.00**

COST SUMMARY

April 2024
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

Total Cost for Street: 10th St — $54,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1448 10th St and S B St			**$27,500.00**
4334	**Perpendicular**	**E**	**$6,500.00**
4333	**Perpendicular**	**N**	**$7,000.00**
4331	**Perpendicular**	**S**	**$7,000.00**
4332	**Perpendicular**	**W**	**$7,000.00**
1287 10th St and S D St			**$27,000.00**
3676	**Perpendicular**	**E**	**$6,500.00**
3679	**Perpendicular**	**N**	**$6,500.00**
3677	**Perpendicular**	**S**	**$7,000.00**
3678	**Perpendicular**	**W**	**$7,000.00**
755 10th St and S E St			**$0.00**
4397	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
4396	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
4398	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: 11Th St — $65,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1360 11Th St and S A St			**$16,250.00**
3620	**Perpendicular**	**E**	**$3,250.00**
3619	**Perpendicular**	**N**	**$3,000.00**
3617	**Parallel**	**S**	**$3,500.00**
3618	**Perpendicular**	**W**	**$6,500.00**
1361 11Th St and S B St			**$26,000.00**
3615	**Perpendicular**	**E**	**$6,500.00**
3614	**Perpendicular**	**N**	**$6,500.00**
3616	**Perpendicular**	**S**	**$6,500.00**
3613	**Perpendicular**	**W**	**$6,500.00**
1380 11Th St and S D St			**$22,750.00**
3606	**Perpendicular**	**E**	**$6,500.00**
3607	**Perpendicular**	**N**	**$6,500.00**
3605	**Perpendicular**	**S**	**$3,250.00**
3608	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: 12Th St — $146,750.00

Intersection ID and Street Names:	Type:	Orientation:	
726 12Th St and Roosevelt Ave			**$13,000.00**
3350	**Perpendicular**	**NW**	**$3,000.00**
3352	**Curb Ramp Required**	**SE**	**$7,000.00**

3351	**Perpendicular**	**SW**	**$3,000.00**
1359 12Th St and S A St			**$26,000.00**
3621	**Perpendicular**	**E**	**$6,500.00**
3622	**Perpendicular**	**N**	**$6,500.00**
3624	**Perpendicular**	**S**	**$6,500.00**
3623	**Perpendicular**	**W**	**$6,500.00**
1358 12Th St and S B St			**$26,000.00**
3625	**Perpendicular**	**E**	**$6,500.00**
3626	**Perpendicular**	**N**	**$6,500.00**
3628	**Perpendicular**	**S**	**$6,500.00**
3627	**Perpendicular**	**W**	**$6,500.00**
1418 12Th St and S C St			**$26,000.00**
3598	**Perpendicular**	**E**	**$6,500.00**
3599	**Perpendicular**	**N**	**$6,500.00**
3597	**Perpendicular**	**S**	**$6,500.00**
3600	**Perpendicular**	**W**	**$6,500.00**
1449 12Th St and S D St			**$26,000.00**
3602	**Perpendicular**	**E**	**$6,500.00**
3601	**Perpendicular**	**N**	**$6,500.00**
3603	**Perpendicular**	**S**	**$6,500.00**
3604	**Perpendicular**	**W**	**$6,500.00**
1414 12Th St and S G St			**$9,750.00**
3077	**Perpendicular**	**NE**	**$3,250.00**
3078	**Perpendicular**	**NW**	**$6,500.00**
3076	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3075	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1275 12Th St and S Lake St			**$20,000.00**
3349	**Perpendicular**	**NE**	**$6,500.00**
3347	**Perpendicular**	**NW**	**$6,500.00**
3348	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: 13Th St $69,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1267 13Th St and S A St			**$20,500.00**
3434	**Curb Ramp Required**	**E**	**$7,000.00**
3432	**Perpendicular**	**S**	**$6,500.00**
3433	**Perpendicular**	**W**	**$7,000.00**
1268 13Th St and S B St			**$22,750.00**
3438	**Perpendicular**	**E**	**$3,250.00**
3435	**Perpendicular**	**N**	**$6,500.00**
3437	**Perpendicular**	**S**	**$6,500.00**
3436	**Perpendicular**	**W**	**$6,500.00**
942 13Th St and S C St			**$26,000.00**

3594	**Perpendicular**	**E**	**$6,500.00**
3595	**Perpendicular**	**N**	**$6,500.00**
3593	**Perpendicular**	**S**	**$6,500.00**
3596	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: 14Th St — $16,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1160 14Th St and **Don Miguel St**			**$16,000.00**
3062	**Perpendicular**	**E**	**$6,500.00**
3063	**Curb Ramp Required**	**NW**	**$7,000.00**
3061	**Perpendicular**	**S**	**$2,500.00**
1379 14Th St and **S E St**			**$0.00**
3048	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3050	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3049	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3052	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
3051	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: 1St St — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1030 1St St and **N E St**			**$13,500.00**
1057	**Perpendicular**	**E**	**$6,500.00**
1056	**Perpendicular**	**N**	**$0.00**
1055	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: 2Nd St — $59,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1357 2Nd St and **N C St**			**$27,000.00**
3823	**Perpendicular**	**NE**	**$7,000.00**
3826	**Perpendicular**	**NW**	**$7,000.00**
3824	**Perpendicular**	**SE**	**$6,500.00**
3825	**Perpendicular**	**SW**	**$6,500.00**
1356 2Nd St and **N D St**			**$23,000.00**
3827	**Perpendicular**	**E**	**$6,500.00**
3830	**Perpendicular**	**N**	**$6,500.00**
3828	**Perpendicular**	**S**	**$3,000.00**
3829	**Perpendicular**	**W**	**$7,000.00**
960 2Nd St and **N E St**			**$9,500.00**
1060	**Perpendicular**	**E**	**$6,500.00**
1059	**Perpendicular**	**N**	**$3,000.00**
1058	**Driveway**	**SW**	**$0.00**

Total Cost for Street: 4Th St — $104,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1148 4Th St and Flume St			**$28,000.00**
4196	**Perpendicular**	**E**	**$7,000.00**
4195	**Parallel**	**N**	**$7,000.00**
4198	**Perpendicular**	**S**	**$7,000.00**
4197	**Perpendicular**	**W**	**$7,000.00**
962 4Th St and N A St			**$14,000.00**
4209	**Perpendicular**	**E**	**$6,500.00**
4206	**Perpendicular**	**N**	**$500.00**
4208	**Perpendicular**	**S**	**$6,500.00**
4207	**Perpendicular**	**W**	**$500.00**
529 4Th St and N D St			**$14,500.00**
1070	**Perpendicular**	**E**	**$500.00**
1069	**Perpendicular**	**N**	**$7,000.00**
1071	**Perpendicular**	**S**	**$6,500.00**
1072	**Perpendicular**	**W**	**$500.00**
1266 4Th St and N E St			**$27,500.00**
1074	**Perpendicular**	**E**	**$7,000.00**
1073	**Parallel**	**N**	**$7,000.00**
1075	**Parallel**	**S**	**$7,000.00**
1076	**Perpendicular**	**W**	**$6,500.00**
884 4Th St and S Lake St			**$20,500.00**
4199	**Combination**	**E**	**$7,000.00**
4200	**Curb Ramp Required**	**N**	**$7,000.00**
4201	**Perpendicular**	**S**	**$0.00**
4202	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: 5Th St — $105,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1352 5Th St and Flume St			**$23,500.00**
4218	**Combination**	**E**	**$7,000.00**
4219	**Perpendicular**	**N**	**$2,500.00**
4217	**Combination**	**S**	**$7,000.00**
4220	**Combination**	**W**	**$7,000.00**
1351 5Th St and High St			**$27,500.00**
4338	**Perpendicular**	**E**	**$6,500.00**
4339	**Perpendicular**	**N**	**$7,000.00**
4341	**Perpendicular**	**S**	**$7,000.00**
4340	**Perpendicular**	**W**	**$7,000.00**
1147 5Th St and Mace St			**$0.00**

3273	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3272	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1387 5Th St and **N B St**			**$27,500.00**
4378	**Perpendicular**	**E**	**$6,500.00**
4377	**Perpendicular**	**N**	**$7,000.00**
4379	**Perpendicular**	**S**	**$7,000.00**
4376	**Perpendicular**	**W**	**$7,000.00**
279 5Th St and **N C St**			**$0.00**
4380	**Under Construction**	**E**	**$0.00**
4381	**Under Construction**	**N**	**$0.00**
4382	**Under Construction**	**S**	**$0.00**
4383	**Under Construction**	**W**	**$0.00**
977 5Th St and **S Lake St**			**$27,000.00**
4216	**Perpendicular**	**E**	**$6,500.00**
4215	**Combination**	**N**	**$7,000.00**
4214	**Perpendicular**	**S**	**$6,500.00**
4213	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: 6Th St **$88,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1329 6Th St and **S B St**			**$26,000.00**
4457	**Perpendicular**	**E**	**$6,500.00**
4460	**Perpendicular**	**N**	**$6,500.00**
4458	**Perpendicular**	**S**	**$6,500.00**
4459	**Perpendicular**	**W**	**$6,500.00**
356 6Th St and **S Lake St**			**$35,000.00**
4365	**Combination**	**E**	**$14,000.00**
4364	**Combination**	**N**	**$3,500.00**
4366	**Combination**	**S**	**$10,500.00**
4367	**Combination**	**W**	**$7,000.00**
1410 6Th St and **Vineyard Ave**			**$27,000.00**
4355	**Curb Ramp Required**	**E**	**$7,000.00**
4354	**Perpendicular**	**N**	**$6,500.00**
4356	**Curb Ramp Required**	**S**	**$7,000.00**
4357	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: 7Th St **$28,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
903 7Th St and **S Lake St**			**$28,000.00**
4451	**Perpendicular**	**E**	**$7,000.00**
4449	**Perpendicular**	**N**	**$7,000.00**
4452	**Perpendicular**	**S**	**$7,000.00**

4450	Curb Ramp Required	W	$7,000.00

Total Cost for Street: 9Th St — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1370 9Th St and S E St			**$0.00**
4248	No Sidewalk, Curb Ramp Not Required	E	$0.00
4245	No Sidewalk, Curb Ramp Not Required	N	$0.00
4246	No Sidewalk, Curb Ramp Not Required	S	$0.00
4247	No Sidewalk, Curb Ramp Not Required	W	$0.00
652 9Th St and S Lake St			**$21,000.00**
4299	Parallel	E	$7,000.00
4300	Perpendicular	N	$7,000.00
4301	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: A St — $79,500.00

Intersection ID and Street Names:	Type:	Orientation:	
223 A St and Kenney Ct			**$13,500.00**
3408	Perpendicular	NE	$6,500.00
3409	Perpendicular	NW	$7,000.00
3410	No Sidewalk, Curb Ramp Not Required	SW	$0.00
798 A St and Knox Ave			**$17,500.00**
3414	Parallel	NE	$3,500.00
3416	Parallel	NW	$7,000.00
3415	Curb Ramp Required	SE	$7,000.00
1441 A St and Lake St			**$27,500.00**
3424	Parallel	NE	$7,000.00
3427	Perpendicular	NW	$6,500.00
3425	Parallel	SE	$7,000.00
3426	Parallel	SW	$7,000.00
1584 A St and Rd 28			**$3,500.00**
3405	Perpendicular	NW	$500.00
3407	No Sidewalk, Curb Ramp Not Required	SE	$0.00
3406	Perpendicular	SW	$3,000.00
799 A St and Stinson Ave			**$17,500.00**
3417	Parallel	NE	$3,500.00
3419	Parallel	NW	$7,000.00
3418	Curb Ramp Required	SE	$7,000.00

Total Cost for Street: Adams Ave — $52,500.00

Intersection ID and Street Names:	Type:	Orientation:	
789 Adams Ave and E Ellis St			**$6,250.00**

1951	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1952	**Perpendicular**	**SE**	**$3,250.00**
1953	**Perpendicular**	**SW**	**$3,000.00**
85 Adams Ave and E Kennedy St			**$13,000.00**
1982	**Perpendicular**	**NE**	**$6,500.00**
1983	**Perpendicular**	**NW**	**$6,500.00**
1981	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
788 Adams Ave and Eisenhower Ln			**$20,000.00**
2032	**Perpendicular**	**NE**	**$6,500.00**
2033	**Perpendicular**	**NW**	**$6,500.00**
2031	**Curb Ramp Required**	**S**	**$7,000.00**
84 Adams Ave and Tyler Ln			**$13,250.00**
1987	**Curb Ramp Required**	**N**	**$7,000.00**
1988	**Perpendicular**	**SE**	**$3,000.00**
1989	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Adanac Way **$83,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
259 Adanac Way and Adanac Ct			**$13,250.00**
1998	**Curb Ramp Required**	**N**	**$7,000.00**
1999	**Perpendicular**	**SE**	**$3,000.00**
2000	**Perpendicular**	**SW**	**$3,250.00**
258 Adanac Way and Dominguez Dr			**$20,000.00**
2017	**Perpendicular**	**NE**	**$6,500.00**
2018	**Perpendicular**	**NW**	**$6,500.00**
2016	**Curb Ramp Required**	**S**	**$7,000.00**
261 Adanac Way and Jericho Dr			**$15,750.00**
2007	**Perpendicular**	**NE**	**$6,500.00**
2006	**Perpendicular**	**NW**	**$3,250.00**
2004	**Perpendicular**	**SE**	**$3,000.00**
2005	**Perpendicular**	**SW**	**$3,000.00**
260 Adanac Way and Jesse Dr			**$18,000.00**
2094	**Perpendicular**	**NE**	**$2,500.00**
2095	**Perpendicular**	**NW**	**$2,500.00**
2097	**Perpendicular**	**SE**	**$6,500.00**
2096	**Perpendicular**	**SW**	**$6,500.00**
257 Adanac Way and Madison Dr			**$16,750.00**
1995	**Curb Ramp Required**	**E**	**$7,000.00**
1997	**Perpendicular**	**NW**	**$6,500.00**
1996	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Adelaide Ave — $37,000.00

Intersection ID and Street Names:	Type:	Orientation:	
434 Adelaide Ave and Canal St			**$21,000.00**
4315	**Perpendicular**	**E**	**$7,000.00**
4313	**Curb Ramp Required**	**N**	**$7,000.00**
4314	**Perpendicular**	**S**	**$7,000.00**
1011 Adelaide Ave and Sawmill St			**$16,000.00**
3370	**Perpendicular**	**E**	**$2,500.00**
3372	**Perpendicular**	**N**	**$6,500.00**
3371	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Adell St — $37,000.00

Intersection ID and Street Names:	Type:	Orientation:	
364 Adell St and Austin Ave			**$0.00**
3949	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3948	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3950	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3951	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
363 Adell St and Country Club Dr			**$13,500.00**
3876	**Curb Ramp Required**	**N**	**$7,000.00**
3877	**Parallel**	**SE**	**$3,000.00**
3878	**Parallel**	**SW**	**$3,500.00**
367 Adell St and N D St			**$7,000.00**
3945	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3946	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3944	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3947	**Perpendicular**	**SW**	**$7,000.00**
365 Adell St and Sonora St			**$16,500.00**
3893	**Parallel**	**N**	**$3,000.00**
3892	**Perpendicular**	**SE**	**$6,500.00**
3894	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Airport Dr — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
821 Airport Dr and Aviation Dr			**$6,500.00**
3807	**Perpendicular**	**E**	**$6,500.00**
3806	**Driveway**	**NW**	**$0.00**
3808	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
822 Airport Dr and Yeager Rd			**$10,250.00**
3786	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**

3788	Perpendicular	SE	$3,250.00
3787	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Alderwood Ct — $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
968 Alderwood Ct and N Schnoor Ave			**$13,000.00**
2436	Perpendicular	NW	$6,500.00
2437	Perpendicular	SW	$6,500.00

Total Cost for Street: Almond Ave — $123,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1447 Almond Ave and Commerce Dr			**$13,500.00**
1910	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1911	Curb Ramp Required	NW	$7,000.00
1912	No Sidewalk, Curb Ramp Not Required	SE	$0.00
1913	Perpendicular	SW	$6,500.00
37 Almond Ave and Emily Way			**$15,750.00**
2886	Perpendicular	NE	$3,000.00
2885	Perpendicular	NW	$3,000.00
2883	Perpendicular	SE	$6,500.00
2884	Perpendicular	SW	$3,250.00
36 Almond Ave and Gateway Dr			**$18,500.00**
2928	Perpendicular	NE	$6,500.00
2929	Perpendicular	NW	$6,500.00
2926	Perpendicular	SE	$2,500.00
2927	Perpendicular	SW	$3,000.00
1421 Almond Ave and Oakridge Dr			**$27,000.00**
334	Perpendicular	NE	$7,000.00
335	Perpendicular	NW	$7,000.00
337	Perpendicular	SE	$6,500.00
336	Perpendicular	SW	$6,500.00
999 Almond Ave and Pine St			**$0.00**
2772	No Sidewalk, Curb Ramp Not Required	NE	$0.00
2773	No Sidewalk, Curb Ramp Not Required	NW	$0.00
2774	No Sidewalk, Curb Ramp Not Required	SW	$0.00
651 Almond Ave and Rubicon Ave			**$6,000.00**
2795	No Sidewalk, Curb Ramp Not Required	NW	$0.00
2793	Perpendicular	SE	$3,000.00
2794	Perpendicular	SW	$3,000.00
1169 Almond Ave and Santa Bonita St			**$20,000.00**
332	Perpendicular	NE	$6,500.00
333	Perpendicular	NW	$6,500.00

331	**Curb Ramp Required**	**S**	**$7,000.00**
966 Almond Ave and **Schnoor Ave**			**$10,000.00**
1916	**Perpendicular**	**NE**	**$3,000.00**
1914	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1915	**Curb Ramp Required**	**S**	**$7,000.00**
643 Almond Ave and **Stadium Rd**			**$12,500.00**
403	**Perpendicular**	**NE**	**$3,000.00**
400	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
402	**Perpendicular**	**SE**	**$6,500.00**
401	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Amerine Ave $3,250.00

Intersection ID and Street Names:	Type:	Orientation:	
709 Amerine Ave and **Fifth St**			**$0.00**
533	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
530	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
532	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
531	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1262 Amerine Ave and **Fourth St**			**$0.00**
536	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
537	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
535	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
534	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1362 Amerine Ave and **Jennings St**			**$0.00**
539	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
540	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
538	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
541	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1111 Amerine Ave and **Third St**			**$3,250.00**
542	**Perpendicular**	**NW**	**$3,250.00**
544	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
543	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Amy Ave $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
176 Amy Ave and **Kathryn Ave**			**$13,000.00**
2081	**Curb Ramp Required**	**N**	**$7,000.00**
2082	**Perpendicular**	**SE**	**$3,000.00**
2083	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Angel Falls Ct — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
571 Angel Falls Ct and Capistrano Dr			**$20,000.00**
2601	**Perpendicular**	**NE**	**$6,500.00**
2602	**Perpendicular**	**NW**	**$6,500.00**
2603	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Anna Ave — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
675 Anna Ave and Carmen Ave			**$13,500.00**
2075	**Curb Ramp Required**	**N**	**$7,000.00**
2077	**Perpendicular**	**SE**	**$3,250.00**
2076	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Apple Tree Dr — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
555 Apple Tree Dr and Toschi Dr			**$26,000.00**
2687	**Perpendicular**	**NE**	**$6,500.00**
2686	**Perpendicular**	**NW**	**$6,500.00**
2688	**Perpendicular**	**SE**	**$6,500.00**
2685	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Aram Ave — $14,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1012 Aram Ave and Joy St			**$0.00**
878	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
877	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
879	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1013 Aram Ave and W Central Ave			**$14,000.00**
876	**Curb Ramp Required**	**E**	**$7,000.00**
874	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
875	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Arbella Ln — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1058 Arbella Ln and Frederick Way			**$20,000.00**
2503	**Perpendicular**	**NW**	**$6,500.00**
2505	**Curb Ramp Required**	**SE**	**$7,000.00**

2504	Perpendicular	SW	$6,500.00

Total Cost for Street: Ardilla Dr **$64,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1582 Ardilla Dr and Bridge Way			**$17,000.00**
3395	Curb Ramp Required	NE	$7,000.00
3385	Perpendicular	NW	$3,000.00
3386	Curb Ramp Required	SW	$7,000.00
189 Ardilla Dr and Knox St			**$22,750.00**
3092	Perpendicular	NE	$3,250.00
3093	Perpendicular	NW	$6,500.00
3091	Perpendicular	SE	$6,500.00
3090	Perpendicular	SW	$6,500.00
187 Ardilla Dr and Mariposa St			**$13,000.00**
3378	Curb Ramp Required	NE	$7,000.00
3377	Perpendicular	SE	$3,000.00
3376	Perpendicular	SW	$3,000.00
186 Ardilla Dr and Monarch Rd			**$12,000.00**
3383	Perpendicular	NE	$2,500.00
3382	Perpendicular	NW	$2,500.00
3384	Curb Ramp Required	SE	$7,000.00

Total Cost for Street: Aries Ct **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1482 Aries Ct and Glenville Ave			**$16,500.00**
2324	Curb Ramp Required	NE	$7,000.00
2322	Perpendicular	NW	$3,000.00
2323	Perpendicular	SW	$6,500.00

Total Cost for Street: Ashbury Ct **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
665 Ashbury Ct and Glenville Ave			**$16,500.00**
2313	Curb Ramp Required	NE	$7,000.00
2314	Perpendicular	SE	$3,000.00
2315	Perpendicular	SW	$6,500.00

Total Cost for Street: Ashlan Way **$115,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
854 Ashlan Way and Austin Ave			**$21,000.00**
3956	Perpendicular	NE	$7,000.00

3957	**Perpendicular**	**SE**	**$7,000.00**
3955	**Curb Ramp Required**	**W**	**$7,000.00**
172 Ashlan Way and **Fresno St**			**$0.00**
2238	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2235	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2237	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2236	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1108 Ashlan Way and **Lucia Way**			**$20,000.00**
3909	**Curb Ramp Required**	**N**	**$7,000.00**
3908	**Perpendicular**	**SE**	**$6,500.00**
3910	**Perpendicular**	**SW**	**$6,500.00**
404 Ashlan Way and **N D St**			**$37,750.00**
3980	**Curb Ramp Required**	**E**	**$7,000.00**
3990	**Perpendicular**	**NE**	**$7,000.00**
3981	**Perpendicular**	**NW**	**$3,250.00**
3988	**Perpendicular**	**SE**	**$7,000.00**
3979	**Perpendicular**	**SW**	**$6,500.00**
3989	**Curb Ramp Required**	**W**	**$7,000.00**
1123 Ashlan Way and **Noreen Way**			**$16,500.00**
3982	**Perpendicular**	**NE**	**$3,000.00**
3984	**Perpendicular**	**SE**	**$6,500.00**
3983	**Curb Ramp Required**	**W**	**$7,000.00**
990 Ashlan Way and **Popoli Way**			**$20,000.00**
3907	**Perpendicular**	**NE**	**$6,500.00**
3905	**Perpendicular**	**NW**	**$6,500.00**
3906	**Curb Ramp Required**	**S**	**$7,000.00**
171 Ashlan Way and **Rogers St**			**$0.00**
2239	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
2241	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2240	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Aspen Ln — $135,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1538 Aspen Ln and			**$20,000.00**
2463	**Perpendicular**	**NE**	**$6,500.00**
2462	**Perpendicular**	**SE**	**$6,500.00**
2461	**Curb Ramp Required**	**SW**	**$7,000.00**
1450 Aspen Ln and **Beechwood Way**			**$22,750.00**
2467	**Perpendicular**	**NE**	**$3,250.00**
2466	**Perpendicular**	**NW**	**$6,500.00**
2464	**Perpendicular**	**SE**	**$6,500.00**
2465	**Perpendicular**	**SW**	**$6,500.00**
1204 Aspen Ln and **Foxglove Way**			**$13,000.00**

2424	**Driveway**	**NE**	**$0.00**
2423	**Perpendicular**	**SE**	**$6,500.00**
2422	**Perpendicular**	**SW**	**$6,500.00**
1331 Aspen Ln and Grapewood Way			**$26,000.00**
2470	**Perpendicular**	**NE**	**$6,500.00**
2471	**Perpendicular**	**NW**	**$6,500.00**
2469	**Perpendicular**	**SE**	**$6,500.00**
2468	**Perpendicular**	**SW**	**$6,500.00**
783 Aspen Ln and Meadowrest Way			**$20,000.00**
2460	**Perpendicular**	**NW**	**$6,500.00**
2458	**Curb Ramp Required**	**SE**	**$7,000.00**
2459	**Perpendicular**	**SW**	**$6,500.00**
870 Aspen Ln and Plumwood Way			**$20,000.00**
2474	**Curb Ramp Required**	**NE**	**$7,000.00**
2473	**Perpendicular**	**NW**	**$6,500.00**
2472	**Perpendicular**	**SW**	**$6,500.00**
69 Aspen Ln and W Cleveland Ave			**$13,500.00**
2455	**Perpendicular**	**NE**	**$6,500.00**
2456	**Parallel**	**NW**	**$7,000.00**
2457	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Asti Way $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
598 Asti Way and N D St			**$13,500.00**
3995	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3994	**Perpendicular**	**NW**	**$7,000.00**
3996	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Austin Ave $162,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1115 Austin Ave and Ashlan Way			**$21,000.00**
3958	**Curb Ramp Required**	**E**	**$7,000.00**
3959	**Perpendicular**	**NW**	**$7,000.00**
3960	**Perpendicular**	**SW**	**$7,000.00**
1064 Austin Ave and E Clark St			**$20,500.00**
3952	**Curb Ramp Required**	**E**	**$7,000.00**
3953	**Perpendicular**	**NW**	**$6,500.00**
3954	**Perpendicular**	**SW**	**$7,000.00**
456 Austin Ave and E Cleveland Ave			**$24,250.00**
4156	**Parallel**	**NE**	**$7,000.00**
4155	**Parallel**	**NW**	**$7,000.00**
4157	**Perpendicular**	**SE**	**$3,250.00**

4158	**Parallel**	**SW**	**$7,000.00**
1227 Austin Ave and **E Lincoln Ave**			**$19,500.00**
1276	**Perpendicular**	**NE**	**$3,250.00**
1277	**Perpendicular**	**NW**	**$6,500.00**
1279	**Perpendicular**	**SE**	**$3,250.00**
1278	**Perpendicular**	**SW**	**$6,500.00**
1214 Austin Ave and **Green Way**			**$14,000.00**
1373	**Perpendicular**	**NE**	**$7,000.00**
1372	**Perpendicular**	**SE**	**$7,000.00**
1371	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1134 Austin Ave and **W Sherwood Way**			**$22,500.00**
1375	**Perpendicular**	**NE**	**$6,500.00**
1376	**Perpendicular**	**NW**	**$3,000.00**
1374	**Perpendicular**	**SE**	**$6,500.00**
1377	**Perpendicular**	**SW**	**$6,500.00**
921 Austin Ave and **W South St**			**$19,250.00**
1280	**Parallel**	**NE**	**$3,000.00**
1281	**Perpendicular**	**NW**	**$6,500.00**
1283	**Perpendicular**	**SE**	**$3,250.00**
1282	**Perpendicular**	**SW**	**$6,500.00**
985 Austin Ave and **Wessmith Way**			**$21,000.00**
3967	**Perpendicular**	**NE**	**$7,000.00**
3969	**Perpendicular**	**SE**	**$7,000.00**
3968	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Autumn Rd **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1246 Autumn Rd and **National Ave**			**$0.00**
1634	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1636	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1635	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1035 Autumn Rd and **Summer St**			**$0.00**
1745	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1746	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1747	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1245 Autumn Rd and **Sunnydale St**			**$0.00**
1633	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1631	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1632	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1034 Autumn Rd and **Winter Way**			**$0.00**
1748	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1749	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1750	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Avalon Ave — $33,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1086 Avalon Ave and Kelsey Ln			**$33,500.00**
1554	**Curb Ramp Required**	**E**	**$7,000.00**
1559	**Perpendicular**	**NE**	**$6,500.00**
1556	**Perpendicular**	**NW**	**$6,500.00**
1558	**Perpendicular**	**SE**	**$3,250.00**
1555	**Perpendicular**	**SW**	**$3,250.00**
1557	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Ave 13 — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1455 Ave 13 and Granada Dr			**$0.00**
2566	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2565	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2563	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2564	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Ave 13 1/2 — $6,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1057 Ave 13 1/2 and Westberry Bvd			**$6,500.00**
2573	**Perpendicular**	**NE**	**$6,500.00**
2575	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2574	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Ave 14 1/2 — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1181 Ave 14 1/2 and Sunset Ave			**$0.00**
1382	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1383	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Ave 17 — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
107 Ave 17 and			**$0.00**
3784	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3783	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3785	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1314 Ave 17 and Airport Dr			**$20,500.00**

3779	Curb Ramp Required	NE	$7,000.00
3778	No Sidewalk, Curb Ramp Not Required	NW	$0.00
3776	Perpendicular	SE	$6,500.00
3777	Perpendicular	SW	$7,000.00

Total Cost for Street: Aviation Dr **$0.00**

Intersection ID and Street Names: Type: Orientation:

214 Aviation Dr and **Condor Rd** **$0.00**

3797	Driveway	N	$0.00
3798	No Sidewalk, Curb Ramp Not Required	S	$0.00

925 Aviation Dr and **Falcon Dr** **$0.00**

3794	No Sidewalk, Curb Ramp Not Required	E	$0.00
3796	No Sidewalk, Curb Ramp Not Required	NW	$0.00
3795	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Avila Way **$17,000.00**

Intersection ID and Street Names: Type: Orientation:

405 Avila Way and **Fig Ave** **$17,000.00**

3195	Perpendicular	E	$3,000.00
3193	Parallel	N	$7,000.00
3194	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Awahnee Ct **$16,500.00**

Intersection ID and Street Names: Type: Orientation:

102 Awahnee Ct and **Monterey St** **$16,500.00**

345	Curb Ramp Required	E	$7,000.00
347	Perpendicular	NW	$6,500.00
346	Perpendicular	SW	$3,000.00

Total Cost for Street: Azure Dr **$21,000.00**

Intersection ID and Street Names: Type: Orientation:

396 Azure Dr and **Ivory Ct** **$21,000.00**

4433	Perpendicular	NE	$7,000.00
4432	Perpendicular	SE	$7,000.00
4431	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Barcelona Way **$16,750.00**

Intersection ID and Street Names: Type: Orientation:

464 Barcelona Way and **Wessmith Way** **$16,750.00**

2151	Curb Ramp Required	E	$7,000.00
2153	Perpendicular	NW	$6,500.00
2152	Perpendicular	SW	$3,250.00

Total Cost for Street: Baron St — $20,000.00

Intersection ID and Street Names: | Type: | Orientation:

1236 Baron St and Liberty Ln — $20,000.00

1388	Perpendicular	NE	$6,500.00
1389	Perpendicular	NW	$6,500.00
1387	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Barsotti Ave — $7,000.00

Intersection ID and Street Names: | Type: | Orientation:

1163 Barsotti Ave and N Park Dr — $0.00

930	No Sidewalk, Curb Ramp Not Required	N	$0.00
931	No Sidewalk, Curb Ramp Not Required	SE	$0.00
932	No Sidewalk, Curb Ramp Not Required	SW	$0.00

1162 Barsotti Ave and Ula St — $7,000.00

933	No Sidewalk, Curb Ramp Not Required	E	$0.00
934	Curb Ramp Required	NW	$7,000.00
935	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Bay Ct — $21,000.00

Intersection ID and Street Names: | Type: | Orientation:

362 Bay Ct and Mainberry Dr — $21,000.00

639	Perpendicular	NE	$7,000.00
641	Perpendicular	SE	$7,000.00
640	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Bay View Dr — $41,500.00

Intersection ID and Street Names: | Type: | Orientation:

230 Bay View Dr and Harbor Dr — $14,000.00

676	Curb Ramp Required	E	$7,000.00
675	Perpendicular	W	$7,000.00

229 Bay View Dr and Mainberry Dr — $27,500.00

653	Perpendicular	NE	$7,000.00
655	Perpendicular	NW	$7,000.00
652	Perpendicular	SE	$7,000.00
654	Perpendicular	SW	$6,500.00

Total Cost for Street: Baylor Ct — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1109 Baylor Ct and Jefferson Ave			**$21,000.00**
868	**Perpendicular**	**NE**	**$7,000.00**
870	**Perpendicular**	**NW**	**$7,000.00**
869	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Bent Oak Tr — $28,000.00

Intersection ID and Street Names:	Type:	Orientation:	
210 Bent Oak Tr and Crown Terrace			**$8,000.00**
2777	**Perpendicular**	**NE**	**$500.00**
2778	**Perpendicular**	**SE**	**$500.00**
2779	**Curb Ramp Required**	**SW**	**$7,000.00**
1544 Bent Oak Tr and Ivy Glen Dr			**$10,000.00**
2780	**Perpendicular**	**NW**	**$3,000.00**
2781	**Curb Ramp Required**	**SE**	**$7,000.00**
1543 Bent Oak Tr and Orchard Hill Dr			**$10,000.00**
2776	**Curb Ramp Required**	**NE**	**$7,000.00**
2775	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Bernardi Ave — $26,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1549 Bernardi Ave and Munra Ave			**$13,500.00**
2830	**Perpendicular**	**NW**	**$6,500.00**
2831	**Curb Ramp Required**	**SE**	**$7,000.00**
161 Bernardi Ave and Stadium Rd			**$13,000.00**
2832	**Perpendicular**	**NE**	**$6,500.00**
2833	**Perpendicular**	**SE**	**$6,500.00**
2834	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Berry Dr — $73,500.00

Intersection ID and Street Names:	Type:	Orientation:	
88 Berry Dr and Apple Tree Dr			**$20,000.00**
2668	**Perpendicular**	**NE**	**$6,500.00**
2669	**Perpendicular**	**SE**	**$6,500.00**
2670	**Curb Ramp Required**	**SW**	**$7,000.00**
1535 Berry Dr and Cherry Tree Dr			**$13,500.00**
2674	**Perpendicular**	**NE**	**$6,500.00**

2675	**Curb Ramp Required**	**SW**	**$7,000.00**
894 Berry Dr and **Howard Rd**			**$0.00**
1772	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
86 Berry Dr and **Orange Tree Dr**			**$20,000.00**
2671	**Perpendicular**	**NE**	**$6,500.00**
2672	**Perpendicular**	**SE**	**$6,500.00**
2673	**Curb Ramp Required**	**SW**	**$7,000.00**
89 Berry Dr and **Peanut Dr**			**$20,000.00**
2665	**Perpendicular**	**NE**	**$6,500.00**
2666	**Perpendicular**	**SE**	**$6,500.00**
2667	**Curb Ramp Required**	**SW**	**$7,000.00**
956 Berry Dr and **Summer St**			**$0.00**
1767	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1766	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1765	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
265 Berry Dr and **Westgate Dr**			**$0.00**
1738	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1736	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1737	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1171 Berry Dr and **Winter Way**			**$0.00**
1762	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1763	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1764	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Berry Drive **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
594 Berry Drive and **Plumas Street**			**$20,000.00**
1882	**Curb Ramp Required**	**N**	**$7,000.00**
1883	**Perpendicular**	**SE**	**$6,500.00**
1884	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Bilbao Ct **$13,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
310 Bilbao Ct and **San Sebastian Way**			**$13,250.00**
2179	**Perpendicular**	**NE**	**$3,250.00**
2180	**Perpendicular**	**SE**	**$3,000.00**
2178	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Bloker St **$26,750.00**

Intersection ID and Street Names:	Type:	Orientation:

451 Bloker St and E Cleveland Ave			**$10,500.00**
4162	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
4164	**Parallel**	**SE**	**$7,000.00**
4163	**Parallel**	**SW**	**$3,500.00**
1170 Bloker St and E Lincoln Ave			**$16,250.00**
1263	**Perpendicular**	**NE**	**$3,250.00**
1262	**Perpendicular**	**NW**	**$0.00**
1264	**Perpendicular**	**SE**	**$6,500.00**
1265	**Perpendicular**	**SW**	**$6,500.00**
1430 Bloker St and Rush St			**$0.00**
1260	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1259	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1261	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1258	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Blueberry Ln **$37,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
196 Blueberry Ln and E Almond Ave			**$20,500.00**
3536	**Perpendicular**	**NE**	**$6,500.00**
3538	**Perpendicular**	**NW**	**$7,000.00**
3537	**Curb Ramp Required**	**SE**	**$7,000.00**
197 Blueberry Ln and Madarin St			**$16,500.00**
3534	**Curb Ramp Required**	**NE**	**$7,000.00**
3533	**Perpendicular**	**SE**	**$3,000.00**
3535	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Blueridge Dr **$36,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1513 Blueridge Dr and			**$3,250.00**
411	**Perpendicular**	**SE**	**$3,250.00**
1032 Blueridge Dr and Deerwood Dr			**$20,000.00**
409	**Perpendicular**	**NE**	**$6,500.00**
410	**Perpendicular**	**NW**	**$6,500.00**
408	**Curb Ramp Required**	**S**	**$7,000.00**
1031 Blueridge Dr and Santa Bonita St			**$13,500.00**
323	**Curb Ramp Required**	**E**	**$7,000.00**
324	**Perpendicular**	**NW**	**$3,250.00**
325	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Bo Tree Ln **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:

648 Bo Tree Ln and Majestic Way — **$16,500.00**

2919	**Curb Ramp Required**	**NE**	**$7,000.00**
2918	**Perpendicular**	**SE**	**$3,000.00**
2917	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Boles St — **$0.00**

Intersection ID and Street Names: | Type: | Orientation:

1222 Boles St and Second St — **$0.00**

3811	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3810	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3809	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: Bolinas Way — **$12,000.00**

Intersection ID and Street Names: | Type: | Orientation:

631 Bolinas Way and Orchard Hill Dr — **$12,000.00**

2800	**Curb Ramp Required**	**NE**	**$7,000.00**
2799	**Perpendicular**	**SE**	**$2,500.00**
2798	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Boulder Ave — **$20,500.00**

Intersection ID and Street Names: | Type: | Orientation:

1068 Boulder Ave and Boulder Pl — **$20,500.00**

1494	**Curb Ramp Required**	**N**	**$7,000.00**
1496	**Perpendicular**	**SE**	**$7,000.00**
1495	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Bridge Way — **$3,000.00**

Intersection ID and Street Names: | Type: | Orientation:

1583 Bridge Way and Dome Ave — **$3,000.00**

3394	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Briquel Ave — **$13,500.00**

Intersection ID and Street Names: | Type: | Orientation:

667 Briquel Ave and Carmen Ave — **$13,500.00**

2073	**Perpendicular**	**NE**	**$3,250.00**
2074	**Perpendicular**	**NW**	**$3,250.00**
2072	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Bruce St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1097 Bruce St and Foster Ave			**$0.00**
925	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
926	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
924	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Caitlan Dr — $105,000.00

Intersection ID and Street Names:	Type:	Orientation:	
243 Caitlan Dr and Buena Ventura Ct			**$21,000.00**
1414	**Perpendicular**	**NE**	**$7,000.00**
1416	**Perpendicular**	**SE**	**$7,000.00**
1415	**Curb Ramp Required**	**W**	**$7,000.00**
242 Caitlan Dr and Fiesta Dr			**$21,000.00**
1411	**Curb Ramp Required**	**E**	**$7,000.00**
1412	**Perpendicular**	**NW**	**$7,000.00**
1413	**Perpendicular**	**SE**	**$7,000.00**
244 Caitlan Dr and Isla Vista Ct			**$28,000.00**
1417	**Perpendicular**	**NE**	**$7,000.00**
1418	**Perpendicular**	**NW**	**$7,000.00**
1420	**Perpendicular**	**SE**	**$7,000.00**
1419	**Perpendicular**	**SW**	**$7,000.00**
240 Caitlan Dr and Los Osos Ct			**$21,000.00**
1408	**Perpendicular**	**NE**	**$7,000.00**
1410	**Perpendicular**	**SE**	**$7,000.00**
1409	**Curb Ramp Required**	**W**	**$7,000.00**
241 Caitlan Dr and Riverview Dr			**$14,000.00**
1406	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1405	**Perpendicular**	**SE**	**$7,000.00**
1407	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Caitlan Drive — $28,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1479 Caitlan Drive and Via Capitola			**$14,000.00**
1425	**Perpendicular**	**NE**	**$7,000.00**
1426	**Perpendicular**	**SE**	**$7,000.00**
1424	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1480 Caitlan Drive and Via De Oro			**$14,000.00**
1422	**Perpendicular**	**NE**	**$7,000.00**
1423	**Perpendicular**	**SE**	**$7,000.00**

1421	No Sidewalk, Curb Ramp Not Required	W	$0.00

Total Cost for Street: California Ave — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
800 California Ave and N Park Dr			**$0.00**
951	No Sidewalk, Curb Ramp Not Required	NE	$0.00
950	No Sidewalk, Curb Ramp Not Required	NW	$0.00
952	No Sidewalk, Curb Ramp Not Required	SE	$0.00
949	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1122 California Ave and N Pine St			**$0.00**
903	No Sidewalk, Curb Ramp Not Required	NE	$0.00
901	No Sidewalk, Curb Ramp Not Required	SE	$0.00
902	No Sidewalk, Curb Ramp Not Required	W	$0.00
931 California Ave and Redwood Dr			**$0.00**
947	No Sidewalk, Curb Ramp Not Required	NE	$0.00
948	No Sidewalk, Curb Ramp Not Required	SE	$0.00
946	No Sidewalk, Curb Ramp Not Required	W	$0.00

Total Cost for Street: Calimyrna Ave — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
190 Calimyrna Ave and E Cleveland Ave			**$21,000.00**
4059	Parallel	NE	$7,000.00
4060	Parallel	NW	$7,000.00
4058	Curb Ramp Required	S	$7,000.00
191 Calimyrna Ave and Mission Ave			**$0.00**
2212	No Sidewalk, Curb Ramp Not Required	N	$0.00
2214	No Sidewalk, Curb Ramp Not Required	SE	$0.00
2213	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Cambria Ave — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
809 Cambria Ave and Zak Way			**$20,500.00**
1550	Perpendicular	NE	$7,000.00
1549	Perpendicular	NW	$6,500.00
1548	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Canal St — $43,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1311 Canal St and Lilly St			**$16,000.00**
3251	Perpendicular	E	$6,500.00

3250	Parallel	N	$3,500.00
3252	Perpendicular	S	$3,000.00
3253	Perpendicular	W	$3,000.00

1256 Canal St and Vineyard Ave — **$27,500.00**

4312	Perpendicular	E	$7,000.00
4311	Perpendicular	N	$7,000.00
4309	Perpendicular	S	$6,500.00
4310	Perpendicular	W	$7,000.00

Total Cost for Street: Capistrano Dr — $8,000.00

Intersection ID and Street Names:	Type:	Orientation:	

649 Capistrano Dr and S Timberline Dr — **$8,000.00**

2604	Perpendicular	NE	$500.00
2605	Perpendicular	SE	$500.00
2606	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: Carmel St — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	

1576 Carmel St and Fritz St — **$13,500.00**

3160	Curb Ramp Required	NW	$7,000.00
3159	Perpendicular	SW	$6,500.00

Total Cost for Street: Carmen Ave — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	

692 Carmen Ave and Merced St — **$13,500.00**

2113	Perpendicular	NE	$3,250.00
2112	Perpendicular	SE	$3,250.00
2111	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Cedar Creek Ln — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	

1159 Cedar Creek Ln and Sultana Dr — **$21,000.00**

1539	Perpendicular	NE	$7,000.00
1538	Perpendicular	NW	$7,000.00
1540	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Central Ave — $93,000.00

Intersection ID and Street Names:	Type:	Orientation:	

1183 Central Ave and 2Nd St — **$13,500.00**

3848	**Curb Ramp Required**	**N**	**$7,000.00**
3847	**Perpendicular**	**SE**	**$3,250.00**
3849	**Perpendicular**	**SW**	**$3,250.00**
422 Central Ave and N A St			**$17,000.00**
3840	**Perpendicular**	**NE**	**$7,000.00**
3839	**Parallel**	**NW**	**$3,500.00**
3837	**Perpendicular**	**SE**	**$0.00**
3838	**Perpendicular**	**SSE**	**$0.00**
3841	**Perpendicular**	**SSW**	**$0.00**
3842	**Perpendicular**	**SW**	**$6,500.00**
1444 Central Ave and N B St			**$3,500.00**
3844	**Under Construction**	**NE**	**$0.00**
3845	**Under Construction**	**NW**	**$0.00**
3843	**Perpendicular**	**SE**	**$0.00**
3846	**Parallel**	**SW**	**$3,500.00**
1426 Central Ave and N C St			**$12,750.00**
3821	**Under Construction**	**NE**	**$0.00**
3820	**Parallel**	**NW**	**$3,000.00**
3822	**Perpendicular**	**SE**	**$6,500.00**
3819	**Perpendicular**	**SW**	**$3,250.00**
817 Central Ave and N D St			**$3,000.00**
3818	**Under Construction**	**NE**	**$0.00**
3815	**Under Construction**	**NW**	**$0.00**
3817	**Perpendicular**	**SE**	**$0.00**
3816	**Perpendicular**	**SW**	**$3,000.00**
796 Central Ave and N E St			**$10,000.00**
1054	**Perpendicular**	**E**	**$0.00**
1052	**Curb Ramp Required**	**N**	**$7,000.00**
1053	**Perpendicular**	**S**	**$3,000.00**
1304 Central Ave and N Gateway Dr			**$19,250.00**
1051	**Perpendicular**	**E**	**$6,500.00**
1050	**Perpendicular**	**N**	**$3,000.00**
1048	**Perpendicular**	**S**	**$6,500.00**
1049	**Perpendicular**	**W**	**$3,250.00**
1136 Central Ave and N Lake St			**$14,000.00**
4205	**Perpendicular**	**S**	**$7,000.00**
4204	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Central Ct **$14,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
743 Central Ct and W Central Ave			**$14,000.00**
872	**Curb Ramp Required**	**NE**	**$7,000.00**
871	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**

873	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Central Pl — $42,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1094 Central Pl and Orchard Ave			**$21,000.00**
824	Curb Ramp Required	N	$7,000.00
825	Perpendicular	SE	$7,000.00
826	Perpendicular	SW	$7,000.00
1093 Central Pl and W Central Ave			**$21,000.00**
834	Perpendicular	NE	$7,000.00
835	Perpendicular	SE	$7,000.00
833	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Chatom Way — $20,250.00

Intersection ID and Street Names:	Type:	Orientation:	
104 Chatom Way and Gary Ln			**$7,250.00**
233	Perpendicular	NE	$500.00
232	Perpendicular	NW	$3,250.00
234	Perpendicular	SE	$500.00
231	Perpendicular	SW	$3,000.00
103 Chatom Way and Triviso Ave			**$13,000.00**
237	Perpendicular	NE	$3,000.00
236	Perpendicular	NW	$3,000.00
235	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Cherry St — $10,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1592 Cherry St and Peach St			**$10,500.00**
3498	Curb Ramp Required	NW	$7,000.00
3497	Parallel	SE	$3,500.00

Total Cost for Street: Cherry Tree Dr — $6,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1477 Cherry Tree Dr and			**$6,250.00**
2681	No Sidewalk, Curb Ramp Not Required	NE	$0.00
2680	Perpendicular	NW	$3,250.00
2679	Perpendicular	SW	$3,000.00

Total Cost for Street: Chestnut Ave — $69,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1559 Chestnut Ave and			**$20,250.00**
2964	**Perpendicular**	**NE**	**$6,250.00**
2965	**Curb Ramp Required**	**SW**	**$14,000.00**
723 Chestnut Ave and Acorn Ct			**$12,000.00**
2967	**Curb Ramp Required**	**NW**	**$7,000.00**
2968	**Perpendicular**	**SE**	**$2,500.00**
2966	**Perpendicular**	**SW**	**$2,500.00**
724 Chestnut Ave and Cashew Ct			**$20,000.00**
2970	**Curb Ramp Required**	**NW**	**$7,000.00**
2971	**Perpendicular**	**SE**	**$6,500.00**
2969	**Perpendicular**	**SW**	**$6,500.00**
1062 Chestnut Ave and Watt St			**$16,750.00**
2930	**Curb Ramp Required**	**NW**	**$7,000.00**
2932	**Perpendicular**	**SE**	**$3,250.00**
2931	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Chianti Ave — $47,000.00

Intersection ID and Street Names:	Type:	Orientation:	
467 Chianti Ave and S Double Tree Way			**$20,000.00**
2618	**Curb Ramp Required**	**NW**	**$7,000.00**
2616	**Perpendicular**	**SE**	**$6,500.00**
2617	**Perpendicular**	**SW**	**$6,500.00**
1531 Chianti Ave and S Timberline Dr			**$13,500.00**
2619	**Perpendicular**	**NE**	**$6,500.00**
2620	**Curb Ramp Required**	**NW**	**$7,000.00**
1530 Chianti Ave and S Wolftrap St			**$13,500.00**
2615	**Curb Ramp Required**	**NE**	**$7,000.00**
2614	**Perpendicular**	**NW**	**$6,500.00**

Total Cost for Street: Chianti Ct — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1187 Chianti Ct and Santa Bonita St			**$16,750.00**
329	**Perpendicular**	**NE**	**$3,250.00**
330	**Perpendicular**	**SE**	**$6,500.00**
328	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Claremont Dr — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
952 Claremont Dr and University Ave			**$21,000.00**
745	Curb Ramp Required	N	$7,000.00
744	Perpendicular	SE	$7,000.00
746	Perpendicular	SW	$7,000.00

Total Cost for Street: Clemmensen Ave — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
911 Clemmensen Ave and Madera Ave			**$0.00**
3568	No Sidewalk, Curb Ramp Not Required	NE	$0.00
3567	No Sidewalk, Curb Ramp Not Required	NW	$0.00
3569	No Sidewalk, Curb Ramp Not Required	SE	$0.00

Total Cost for Street: Clinton St — $198,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1124 Clinton St and Elm Ave			**$23,250.00**
3205	Perpendicular	E	$3,250.00
3204	Perpendicular	N	$6,500.00
3202	Perpendicular	S	$6,500.00
3203	Parallel	W	$7,000.00
1125 Clinton St and Fig Ave			**$19,750.00**
3191	Perpendicular	E	$2,500.00
3192	Parallel	N	$7,000.00
3190	Perpendicular	S	$3,250.00
3189	Parallel	W	$7,000.00
922 Clinton St and Magnolia St			**$17,500.00**
3226	Curb Ramp Required	E	$7,000.00
3228	Parallel	N	$3,500.00
3225	Parallel	S	$3,500.00
3227	Parallel	W	$3,500.00
808 Clinton St and Malone St			**$12,750.00**
3249	Perpendicular	N	$2,500.00
3247	Curb Ramp Required	S	$7,000.00
3248	Perpendicular	W	$3,250.00
818 Clinton St and Millview Dr			**$16,000.00**
3222	Perpendicular	E	$6,500.00
3223	Curb Ramp Required	N	$7,000.00
3224	Perpendicular	S	$2,500.00
1436 Clinton St and S B St			**$27,500.00**

4323	**Perpendicular**	**E**	**$7,000.00**
4325	**Perpendicular**	**N**	**$7,000.00**
4324	**Perpendicular**	**S**	**$7,000.00**
4326	**Perpendicular**	**W**	**$6,500.00**

1172 Clinton St and **S C St** **$13,500.00**

3664	**Perpendicular**	**E**	**$3,250.00**
3662	**Perpendicular**	**N**	**$3,250.00**
3663	**Curb Ramp Required**	**W**	**$7,000.00**

1193 Clinton St and **S Lake St** **$28,000.00**

4302	**Perpendicular**	**E**	**$7,000.00**
4303	**Parallel**	**N**	**$7,000.00**
4305	**Parallel**	**S**	**$7,000.00**
4304	**Perpendicular**	**W**	**$7,000.00**

787 Clinton St and **Sycamore Ave** **$21,000.00**

4308	**Parallel**	**E**	**$7,000.00**
4307	**Perpendicular**	**N**	**$7,000.00**
4306	**Perpendicular**	**W**	**$7,000.00**

445 Clinton St and **Tozer St** **$19,000.00**

3211	**Perpendicular**	**E**	**$3,000.00**
3210	**Perpendicular**	**N**	**$3,000.00**
3212	**Perpendicular**	**S**	**$6,500.00**
3209	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: Cloud Rest Ct **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	

506 Cloud Rest Ct and **Monterey St** **$20,000.00**

351	**Curb Ramp Required**	**E**	**$7,000.00**
353	**Perpendicular**	**NW**	**$6,500.00**
352	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Coconut St **$13,500.00**

Intersection ID and Street Names:	Type:	Orientation:	

1589 Coconut St and **Hacienda St** **$13,500.00**

3484	**Perpendicular**	**NW**	**$6,500.00**
3485	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Colima Ave **$9,500.00**

Intersection ID and Street Names:	Type:	Orientation:	

1545 Colima Ave and **Ivy Glen Dr** **$9,500.00**

2788	**Perpendicular**	**NE**	**$2,500.00**
2789	**Perpendicular**	**NW**	**$6,500.00**

2790	Parallel	SW	$500.00

Total Cost for Street: Columbia St — $43,000.00

Intersection ID and Street Names:	Type:	Orientation:	
848 Columbia St and E Lincoln Ave			**$16,000.00**
1160	Perpendicular	NE	$3,000.00
1159	Perpendicular	NW	$6,500.00
1157	Perpendicular	SE	$3,000.00
1158	Parallel	SW	$3,500.00
849 Columbia St and E Rush St			**$0.00**
1139	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1138	No Sidewalk, Curb Ramp Not Required	NW	$0.00
1140	No Sidewalk, Curb Ramp Not Required	SE	$0.00
1137	No Sidewalk, Curb Ramp Not Required	SW	$0.00
560 Columbia St and Green Way			**$7,000.00**
1227	Curb Ramp Required	N	$7,000.00
1228	No Sidewalk, Curb Ramp Not Required	SE	$0.00
1229	No Sidewalk, Curb Ramp Not Required	SW	$0.00
814 Columbia St and Riverside Dr			**$3,250.00**
1165	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1166	Perpendicular	NW	$3,250.00
1164	No Sidewalk, Curb Ramp Not Required	S	$0.00
813 Columbia St and W South St			**$16,750.00**
1156	Perpendicular	NE	$6,500.00
1155	Perpendicular	NW	$7,000.00
1153	Perpendicular	SE	$0.00
1154	Perpendicular	SW	$3,250.00

Total Cost for Street: Concord Ave — $29,250.00

Intersection ID and Street Names:	Type:	Orientation:	
951 Concord Ave and Gary Ln			**$12,500.00**
307	Perpendicular	NE	$3,000.00
308	Perpendicular	NW	$3,250.00
306	Perpendicular	SE	$3,250.00
305	Perpendicular	SW	$3,000.00
950 Concord Ave and Madrid Ln			**$16,750.00**
295	Curb Ramp Required	N	$7,000.00
296	Perpendicular	SE	$6,500.00
297	Perpendicular	SW	$3,250.00

Total Cost for Street: Condor Dr			**$23,250.00**
Intersection ID and Street Names:	Type:	Orientation:	
153 Condor Dr and Aviation Dr			**$3,250.00**
3792	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3793	**Perpendicular**	**SW**	**$3,250.00**
154 Condor Dr and Kennedy St			**$7,000.00**
3802	**Perpendicular**	**NE**	**$7,000.00**
3799	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3801	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3800	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
871 Condor Dr and W Cleveland Ave			**$13,000.00**
2310	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2312	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2309	**Perpendicular**	**SE**	**$6,500.00**
2311	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Condor Rd			**$0.00**
Intersection ID and Street Names:	Type:	Orientation:	
1049 Condor Rd and Boles St			**$0.00**
3814	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3813	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3812	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Corona Dr			**$20,000.00**
Intersection ID and Street Names:	Type:	Orientation:	
415 Corona Dr and La Costa Ct			**$20,000.00**
3447	**Perpendicular**	**NE**	**$6,500.00**
3448	**Curb Ramp Required**	**NW**	**$7,000.00**
3449	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Cortopassi St			**$0.00**
Intersection ID and Street Names:	Type:	Orientation:	
1063 Cortopassi St and Dunham Ave			**$0.00**
3555	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3554	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3553	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Cosentino Dr — $52,500.00

Intersection ID and Street Names:	Type:	Orientation:	
215 Cosentino Dr and St Julien Dr			**$10,000.00**
246	**Perpendicular**	**NE**	**$500.00**
245	**Perpendicular**	**SE**	**$2,500.00**
244	**Curb Ramp Required**	**W**	**$7,000.00**
216 Cosentino Dr and St. Michelle Dr			**$22,500.00**
250	**Perpendicular**	**NE**	**$3,000.00**
249	**Perpendicular**	**NW**	**$6,500.00**
247	**Perpendicular**	**SE**	**$6,500.00**
248	**Perpendicular**	**SW**	**$6,500.00**
217 Cosentino Dr and St. Montelena Dr			**$20,000.00**
210	**Perpendicular**	**NE**	**$6,500.00**
209	**Perpendicular**	**SE**	**$6,500.00**
208	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Country Club Dr — $30,000.00

Intersection ID and Street Names:	Type:	Orientation:	
458 Country Club Dr and Sharon Bvd			**$13,500.00**
3881	**Curb Ramp Required**	**E**	**$7,000.00**
3880	**Perpendicular**	**NW**	**$0.00**
3879	**Perpendicular**	**SW**	**$6,500.00**
457 Country Club Dr and W Sherwood Way			**$16,500.00**
3884	**Perpendicular**	**NE**	**$3,000.00**
3883	**Parallel**	**NW**	**$3,500.00**
3885	**Perpendicular**	**SE**	**$3,000.00**
3882	**Parallel**	**SW**	**$7,000.00**

Total Cost for Street: Creek Dr — $16,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1038 Creek Dr and Ren Way			**$16,000.00**
1855	**Perpendicular**	**NE**	**$2,500.00**
1857	**Perpendicular**	**NW**	**$6,500.00**
1856	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Crimson Way — $14,000.00

Intersection ID and Street Names:	Type:	Orientation:	
618 Crimson Way and Storey Rd			**$14,000.00**
4430	**Perpendicular**	**NE**	**$7,000.00**

4429	**Perpendicular**	**NW**	**$7,000.00**
4428	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: Cross St — $0.00

Intersection ID and Street Names: | Type: | Orientation:

1128 Cross St and Rose St — **$0.00**

3265	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3264	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
3266	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Crystal Way — $55,250.00

Intersection ID and Street Names: | Type: | Orientation:

395 Crystal Way and Bo Tree Ln — **$16,750.00**

2922	**Curb Ramp Required**	**NE**	**$7,000.00**
2921	**Perpendicular**	**SE**	**$3,250.00**
2920	**Perpendicular**	**SW**	**$6,500.00**

751 Crystal Way and Gary Ln — **$18,500.00**

2909	**Perpendicular**	**NE**	**$6,500.00**
2908	**Perpendicular**	**NW**	**$3,000.00**
2906	**Perpendicular**	**SE**	**$2,500.00**
2907	**Perpendicular**	**SW**	**$6,500.00**

61 Crystal Way and Strauss Ct — **$20,000.00**

2902	**Perpendicular**	**NE**	**$6,500.00**
2901	**Perpendicular**	**NW**	**$6,500.00**
2903	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Cutting St — $29,750.00

Intersection ID and Street Names: | Type: | Orientation:

338 Cutting St and E Lincoln Ave — **$15,750.00**

1275	**Perpendicular**	**NE**	**$6,500.00**
1274	**Perpendicular**	**NW**	**$3,000.00**
1272	**Perpendicular**	**SE**	**$3,250.00**
1273	**Perpendicular**	**SW**	**$3,000.00**

1403 Cutting St and Rush St — **$0.00**

1256	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1255	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1257	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1254	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

489 Cutting St and W South St — **$14,000.00**

1270	**Combination**	**NE**	**$3,500.00**
1271	**Combination**	**NW**	**$3,500.00**

1269	**Curb Ramp Required**	S	$7,000.00

Total Cost for Street: Cypress St — $25,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1316 Cypress St and Oak St			**$12,000.00**
2763	**No Sidewalk, Curb Ramp Not Required**	NE	$0.00
2766	**Perpendicular**	NW	$2,500.00
2764	**Perpendicular**	SE	$3,000.00
2765	**Perpendicular**	SW	$6,500.00
828 Cypress St and Olive Ave			**$13,250.00**
2735	**Perpendicular**	NE	$3,250.00
2734	**Perpendicular**	SE	$7,000.00
2733	**Perpendicular**	SW	$3,000.00

Total Cost for Street: D St — $47,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1315 D St and 6Th St			**$17,000.00**
3643	**Combination**	E	$3,500.00
3645	**Combination**	N	$3,500.00
3644	**Parallel**	S	$3,500.00
3646	**Perpendicular**	W	$6,500.00
1176 D St and 7Th St			**$30,750.00**
3640	**Perpendicular**	E	$13,500.00
3641	**Perpendicular**	N	$3,250.00
3637	**Parallel**	S	$3,500.00
3642	**Curb Ramp Required**	W	$10,500.00

Total Cost for Street: Davis St — $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
379 Davis St and E Lincoln Ave			**$13,000.00**
1184	**Perpendicular**	NE	$6,500.00
1185	**Perpendicular**	NW	$6,500.00
1183	**Driveway**	S	$0.00
469 Davis St and Harding Ave			**$0.00**
1188	**No Sidewalk, Curb Ramp Not Required**	NE	$0.00
1187	**No Sidewalk, Curb Ramp Not Required**	SE	$0.00
1186	**No Sidewalk, Curb Ramp Not Required**	W	$0.00

Total Cost for Street: Del Lago Way — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:

140	**Del Lago Way** and **Rancho Mirage Rd**			**$20,000.00**
	3138	**Curb Ramp Required**	**NE**	**$7,000.00**
	3137	**Perpendicular**	**NW**	**$6,500.00**
	3139	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street:	**Dellavalle Ave**	**$52,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
283	**Dellavalle Ave** and **E Lincoln Ave**		**$13,250.00**
1315	**Perpendicular**	**NE**	**$6,500.00**
1316	**Parallel**	**NW**	**$3,500.00**
1314	**Perpendicular**	**SE**	**$3,250.00**
879	**Dellavalle Ave** and **W Sherwood Way**		**$22,500.00**
1378	**Perpendicular**	**NE**	**$6,500.00**
1379	**Perpendicular**	**NW**	**$6,500.00**
1381	**Perpendicular**	**SE**	**$3,000.00**
1380	**Perpendicular**	**SW**	**$6,500.00**
361	**Dellavalle Ave** and **W South St**		**$16,750.00**
1292	**Curb Ramp Required**	**NW**	**$7,000.00**
1290	**Perpendicular**	**SE**	**$3,250.00**
1291	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street:	**Desert Ranch Way**	**$34,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
302	**Desert Ranch Way** and **Makenna Dr**		**$14,000.00**
4394	**Perpendicular**	**NE**	**$7,000.00**
4395	**Curb Ramp Required**	**SW**	**$7,000.00**
462	**Desert Ranch Way** and **S Double Tree Way**		**$20,000.00**
2590	**Perpendicular**	**NE**	**$6,500.00**
2589	**Perpendicular**	**SE**	**$6,500.00**
2591	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street:	**Diamante Ln**	**$9,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
505	**Diamante Ln** and **Orchard Hill Dr**		**$9,500.00**
2803	**Curb Ramp Required**	**NE**	**$7,000.00**
2802	**Perpendicular**	**SE**	**$0.00**
2801	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street:	**Diamond Way**	**$55,750.00**

Intersection ID and Street Names:	Type:	Orientation:

287	**Diamond Way** and **Bo Tree Ln**			**$16,500.00**
	2892	**Perpendicular**	**NE**	**$3,000.00**
	2893	**Perpendicular**	**SE**	**$6,500.00**
	2894	**Curb Ramp Required**	**SW**	**$7,000.00**
994	**Diamond Way** and **Gary Ln**			**$19,000.00**
	2896	**Perpendicular**	**NE**	**$6,500.00**
	2895	**Perpendicular**	**NW**	**$3,000.00**
	2897	**Perpendicular**	**SE**	**$3,000.00**
	2898	**Perpendicular**	**SW**	**$6,500.00**
1553	**Diamond Way** and **Joya Dr**			**$10,000.00**
	2891	**Curb Ramp Required**	**NW**	**$7,000.00**
	2890	**Perpendicular**	**SE**	**$3,000.00**
1554	**Diamond Way** and **Strauss Ct**			**$10,250.00**
	2899	**Perpendicular**	**NE**	**$3,250.00**
	2900	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Dominguez Dr **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
493	**Dominguez Dr** and **Lacreta Ave**		**$16,500.00**
2019	**Curb Ramp Required**	**N**	**$7,000.00**
2021	**Perpendicular**	**SE**	**$3,000.00**
2020	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Double Checkavenue 15 **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
629	**Double Checkavenue 15** and **Tozer St**		**$0.00**
3280	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3281	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3282	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Double Tree Ct **$14,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
264	**Double Tree Ct** and **Gamay Ave**		**$14,000.00**
2594	**Curb Ramp Required**	**NE**	**$7,000.00**
2593	**Perpendicular**	**SE**	**$500.00**
2592	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Double Tree Way **$127,000.00**

Intersection ID and Street Names:	Type:	Orientation:

1350 Double Tree Way and **Boulder Ave**			**$22,750.00**
1499	**Perpendicular**	**NE**	**$6,500.00**
1500	**Perpendicular**	**NW**	**$3,250.00**
1498	**Perpendicular**	**SE**	**$6,500.00**
1497	**Perpendicular**	**SW**	**$6,500.00**
926 Double Tree Way and **Castle Way**			**$20,000.00**
1507	**Curb Ramp Required**	**E**	**$7,000.00**
1506	**Perpendicular**	**NW**	**$6,500.00**
1508	**Perpendicular**	**SW**	**$6,500.00**
908 Double Tree Way and **Liberty Ln**			**$21,000.00**
1395	**Driveway**	**ENE**	**$0.00**
1393	**Perpendicular**	**NE**	**$7,000.00**
1396	**Perpendicular**	**SE**	**$7,000.00**
1394	**Curb Ramp Required**	**W**	**$7,000.00**
900 Double Tree Way and **Paintbrush Dr**			**$20,000.00**
1461	**Perpendicular**	**E**	**$6,500.00**
1462	**Perpendicular**	**N**	**$6,500.00**
1460	**Curb Ramp Required**	**SW**	**$7,000.00**
1440 Double Tree Way and **Suburban Ave**			**$26,500.00**
1487	**Perpendicular**	**NE**	**$7,000.00**
1488	**Perpendicular**	**NW**	**$6,500.00**
1490	**Perpendicular**	**SE**	**$6,500.00**
1489	**Perpendicular**	**SW**	**$6,500.00**
622 Double Tree Way and **Winter Way**			**$16,750.00**
1849	**Perpendicular**	**NE**	**$3,250.00**
1851	**Perpendicular**	**SE**	**$6,500.00**
1850	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Drake St **$23,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1569 Drake St and **Padre St**			**$13,500.00**
3112	**Curb Ramp Required**	**NE**	**$7,000.00**
3111	**Perpendicular**	**SW**	**$6,500.00**
1571 Drake St and **Sauret St**			**$10,000.00**
3124	**Perpendicular**	**NW**	**$3,000.00**
3125	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Driftwood Dr **$81,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
712 Driftwood Dr and **Cypress Ct**			**$20,500.00**
631	**Perpendicular**	**NE**	**$7,000.00**

632	**Perpendicular**	**NW**	**$6,500.00**
630	**Curb Ramp Required**	**S**	**$7,000.00**
907 Driftwood Dr and **Harbor Ct**			**$20,000.00**
628	**Perpendicular**	**NE**	**$6,500.00**
629	**Perpendicular**	**NW**	**$6,500.00**
627	**Curb Ramp Required**	**S**	**$7,000.00**
18 Driftwood Dr and **Mainberry Dr**			**$21,000.00**
634	**Perpendicular**	**NE**	**$7,000.00**
635	**Perpendicular**	**SE**	**$7,000.00**
633	**Curb Ramp Required**	**W**	**$7,000.00**
812 Driftwood Dr and **Monocott Dr**			**$20,000.00**
1577	**Perpendicular**	**NE**	**$6,500.00**
1575	**Perpendicular**	**SE**	**$6,500.00**
1576	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Drysdale Way **$16,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
42 Drysdale Way and **Podres Ln**			**$16,000.00**
3291	**Curb Ramp Required**	**E**	**$7,000.00**
3290	**Perpendicular**	**S**	**$2,500.00**
3292	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: Dunham Ave **$17,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
575 Dunham Ave and **Madera Ave**			**$17,000.00**
3577	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3582	**Parallel**	**NW**	**$14,000.00**
3584	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3583	**Perpendicular**	**SW**	**$3,000.00**
1044 Dunham Ave and **Martin St**			**$0.00**
3551	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3550	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3552	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1045 Dunham Ave and **Monterey St**			**$0.00**
370	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
369	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
368	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Dutra Ct **$22,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1323 Dutra Ct and **Stephanie Ln**			**$22,500.00**

2524	Perpendicular	NE	$6,500.00
2523	Perpendicular	NW	$3,000.00
2521	Perpendicular	SE	$6,500.00
2522	Perpendicular	SW	$6,500.00

Total Cost for Street: Dutra Way — $42,500.00

Intersection ID and Street Names:	Type:	Orientation:	
829 Dutra Way and Arbella Ln			**$16,000.00**
2510	Perpendicular	NE	$2,500.00
2509	Perpendicular	NW	$6,500.00
2511	Curb Ramp Required	SE	$7,000.00
830 Dutra Way and N Schnoor Ave			**$26,500.00**
2514	Perpendicular	NE	$6,500.00
2513	Perpendicular	NW	$6,500.00
2515	Perpendicular	SE	$6,500.00
2512	Perpendicular	SW	$7,000.00

Total Cost for Street: DWayer Ave — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1257 DWayer Ave and Modoc St			**$16,500.00**
2625	Perpendicular	NW	$7,000.00
2623	Curb Ramp Required	SE	$7,000.00
2624	Perpendicular	SW	$2,500.00

Total Cost for Street: E Clark St — $14,000.00

Intersection ID and Street Names:	Type:	Orientation:	
703 E Clark St and N D St			**$14,000.00**
3992	No Sidewalk, Curb Ramp Not Required	NE	$0.00
3993	Perpendicular	SE	$7,000.00
3991	Curb Ramp Required	W	$7,000.00

Total Cost for Street: E Cleveland Ave — $315,750.00

Intersection ID and Street Names:	Type:	Orientation:	
277 E Cleveland Ave and Celeste Ct			**$21,000.00**
4056	Parallel	NE	$7,000.00
4057	Parallel	NW	$7,000.00
4055	Curb Ramp Required	S	$7,000.00
545 E Cleveland Ave and Columbia St			**$28,000.00**
1355	Parallel	NE	$7,000.00
1354	Parallel	NW	$7,000.00

1352	**Parallel**	**SE**	**$7,000.00**
1353	**Parallel**	**SW**	**$7,000.00**
582 E Cleveland Ave and **Cutting St**			**$21,000.00**
4159	**Curb Ramp Required**	**N**	**$7,000.00**
4161	**Parallel**	**SE**	**$7,000.00**
4160	**Parallel**	**SW**	**$7,000.00**
542 E Cleveland Ave and **Davis St**			**$23,500.00**
1216	**Perpendicular**	**NE**	**$6,500.00**
1217	**Perpendicular**	**NW**	**$6,500.00**
1219	**Parallel**	**SE**	**$3,500.00**
1218	**Parallel**	**SW**	**$7,000.00**
584 E Cleveland Ave and **Dellavalle Ave**			**$24,500.00**
4152	**Parallel**	**NE**	**$7,000.00**
4151	**Parallel**	**NW**	**$7,000.00**
4154	**Parallel**	**SE**	**$3,500.00**
4153	**Parallel**	**SW**	**$7,000.00**
583 E Cleveland Ave and **Fresno St**			**$42,000.00**
4175	**Curb Ramp Required**	**N**	**$7,000.00**
4173	**Parallel**	**NE**	**$7,000.00**
4172	**Parallel**	**NW**	**$7,000.00**
4174	**Curb Ramp Required**	**S**	**$7,000.00**
4177	**Parallel**	**SE**	**$7,000.00**
4176	**Parallel**	**SW**	**$7,000.00**
975 E Cleveland Ave and **Kadota Ave**			**$21,000.00**
4061	**Parallel**	**NE**	**$7,000.00**
4063	**Parallel**	**NW**	**$7,000.00**
4062	**Curb Ramp Required**	**S**	**$7,000.00**
546 E Cleveland Ave and **N D St**			**$15,500.00**
1345	**Perpendicular**	**NE**	**$3,000.00**
1344	**Perpendicular**	**NW**	**$3,000.00**
1346	**Perpendicular**	**SE**	**$6,500.00**
1347	**Perpendicular**	**SW**	**$3,000.00**
580 E Cleveland Ave and **N Lake St**			**$27,500.00**
4167	**Perpendicular**	**NE**	**$7,000.00**
4168	**Perpendicular**	**NW**	**$6,500.00**
4166	**Perpendicular**	**SE**	**$7,000.00**
4165	**Perpendicular**	**SW**	**$7,000.00**
543 E Cleveland Ave and **Owens St**			**$20,250.00**
1211	**Perpendicular**	**NE**	**$3,000.00**
1210	**Perpendicular**	**NW**	**$3,250.00**
1208	**Parallel**	**SE**	**$7,000.00**
1209	**Parallel**	**SW**	**$7,000.00**
544 E Cleveland Ave and **Sierra St**			**$24,000.00**
1351	**Perpendicular**	**NE**	**$6,500.00**

1350	**Parallel**	**NW**	**$3,500.00**
1348	**Parallel**	**SE**	**$7,000.00**
1349	**Parallel**	**SW**	**$7,000.00**
547 E Cleveland Ave and **Sonora St**			**$20,000.00**
1328	**Perpendicular**	**NE**	**$3,000.00**
1327	**Perpendicular**	**NW**	**$6,500.00**
1325	**Parallel**	**SE**	**$3,500.00**
1326	**Parallel**	**SW**	**$7,000.00**
581 E Cleveland Ave and **Tulare St**			**$27,500.00**
4179	**Perpendicular**	**NE**	**$6,500.00**
4180	**Parallel**	**NW**	**$7,000.00**
4178	**Parallel**	**SE**	**$7,000.00**
4181	**Parallel**	**SW**	**$7,000.00**

Total Cost for Street: E Ellis St **$29,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1484 E Ellis St and			**$16,250.00**
2063	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1948	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1949	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2064	**Perpendicular**	**SE**	**$6,500.00**
2065	**Perpendicular**	**SW**	**$9,750.00**
658 E Ellis St and **Eagle Dr**			**$3,250.00**
2131	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
2132	**Perpendicular**	**SE**	**$3,250.00**
2133	**Perpendicular**	**SW**	**$0.00**
657 E Ellis St and **Merced St**			**$9,750.00**
2128	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
2129	**Perpendicular**	**SE**	**$6,500.00**
2130	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: E Kennedy St **$43,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1488 E Kennedy St and			**$6,500.00**
1979	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1980	**Perpendicular**	**NW**	**$6,500.00**
1978	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
656 E Kennedy St and **Jericho Dr**			**$9,000.00**
2002	**Perpendicular**	**NE**	**$2,500.00**
2003	**Perpendicular**	**NW**	**$6,500.00**
2001	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
655 E Kennedy St and **Jesse Dr**			**$5,000.00**

2099	**Perpendicular**	**NE**	**$2,500.00**
2100	**Perpendicular**	**NW**	**$2,500.00**
2098	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
654 E Kennedy St and **Merced St**			**$13,250.00**
2105	**Perpendicular**	**NE**	**$3,000.00**
2106	**Perpendicular**	**NW**	**$3,250.00**
2104	**Curb Ramp Required**	**S**	**$7,000.00**
653 E Kennedy St and **Tulare St**			**$10,000.00**
2102	**Curb Ramp Required**	**N**	**$7,000.00**
2101	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2103	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: E Lincoln Ave **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
699 E Lincoln Ave and **Nebraska St**			**$20,000.00**
1313	**Parallel**	**NE**	**$7,000.00**
1312	**Perpendicular**	**NW**	**$6,500.00**
1311	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: E Pecan Ave **$10,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1504 E Pecan Ave and **Raymond Thomas St**			**$10,250.00**
2982	**Curb Ramp Required**	**NW**	**$7,000.00**
2980	**Perpendicular**	**SE**	**$3,250.00**
2981	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: E Riverside Dr **$56,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
878 E Riverside Dr and **Austin Ave**			**$12,750.00**
1284	**Perpendicular**	**NE**	**$6,500.00**
1285	**Perpendicular**	**NW**	**$3,000.00**
1286	**Perpendicular**	**SW**	**$3,250.00**
902 E Riverside Dr and **Dellavalle Ave**			**$6,250.00**
1288	**Perpendicular**	**NE**	**$3,250.00**
1289	**Perpendicular**	**NW**	**$3,000.00**
1287	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
676 E Riverside Dr and **Fresno St**			**$3,750.00**
4092	**Perpendicular**	**NE**	**$500.00**
4093	**Perpendicular**	**NW**	**$3,250.00**
4091	**Perpendicular**	**SE**	**$0.00**
4090	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

173	**E Riverside Dr** and **N Lake St**			**$21,000.00**
	4067	**Perpendicular**	**E**	**$7,000.00**
	4069	**Perpendicular**	**NW**	**$7,000.00**
	4068	**Perpendicular**	**SW**	**$7,000.00**
1084	**E Riverside Dr** and **Nebraska St**			**$13,000.00**
	1297	**Perpendicular**	**NE**	**$6,500.00**
	1298	**Perpendicular**	**NW**	**$6,500.00**
	1296	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: E Yosemite Ave **$268,250.00**

Intersection ID and Street Names:		Type:	Orientation:	
1498	**E Yosemite Ave** and			**$9,000.00**
	2876	**Perpendicular**	**NE**	**$3,000.00**
	2875	**Perpendicular**	**NW**	**$3,000.00**
	3268	**Driveway**	**SE**	**$3,000.00**
	2878	**Perpendicular**	**SW**	**$0.00**
940	**E Yosemite Ave** and **6Th St**			**$0.00**
	3267	**Driveway**	**NW**	**$0.00**
737	**E Yosemite Ave** and **Almond Ave**			**$16,750.00**
	2879	**Perpendicular**	**NE**	**$3,250.00**
	2882	**Perpendicular**	**NW**	**$6,500.00**
	2880	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	2881	**Perpendicular**	**SW**	**$7,000.00**
50	**E Yosemite Ave** and **D St**			**$12,250.00**
	3650	**Perpendicular**	**E**	**$3,250.00**
	3649	**Perpendicular**	**N**	**$3,000.00**
	3647	**Perpendicular**	**S**	**$3,000.00**
	3648	**Perpendicular**	**W**	**$3,000.00**
735	**E Yosemite Ave** and **E Cleveland Ave**			**$22,000.00**
	4045	**Perpendicular**	**ENE**	**$7,000.00**
	4044	**Perpendicular**	**ESE**	**$7,000.00**
	4040	**Perpendicular**	**N**	**$500.00**
	4043	**Perpendicular**	**SSE**	**$500.00**
	4042	**Perpendicular**	**SW**	**$500.00**
	4041	**Perpendicular**	**W**	**$6,500.00**
352	**E Yosemite Ave** and **E Yosemite Ave**			**$0.00**
	4051	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	4050	**Driveway**	**S**	**$0.00**
1077	**E Yosemite Ave** and **Elm Ave**			**$10,750.00**
	4046	**Pedestrian Pad**	**NW**	**$0.00**
	4049	**Perpendicular**	**S**	**$7,000.00**
	4047	**Perpendicular**	**SE**	**$3,250.00**
	4048	**Perpendicular**	**SW**	**$500.00**

741 E Yosemite Ave and **Flume St**				**$21,000.00**
	4353	**Perpendicular**	**E**	**$7,000.00**
	4352	**Curb Ramp Required**	**N**	**$7,000.00**
	4351	**Perpendicular**	**S**	**$7,000.00**
733 E Yosemite Ave and **High St**				**$13,250.00**
	4344	**Perpendicular**	**N**	**$3,000.00**
	4343	**Curb Ramp Required**	**S**	**$7,000.00**
	4342	**Perpendicular**	**W**	**$3,250.00**
734 E Yosemite Ave and **Lyons St**				**$10,750.00**
	4347	**Parallel**	**N**	**$500.00**
	4345	**Curb Ramp Required**	**S**	**$7,000.00**
	4346	**Perpendicular**	**W**	**$3,250.00**
862 E Yosemite Ave and **Mace St**				**$6,750.00**
	3271	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	3270	**Parallel**	**N**	**$3,500.00**
	3269	**Perpendicular**	**W**	**$3,250.00**
863 E Yosemite Ave and **Magnolia St**				**$7,000.00**
	3246	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	3244	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
	3245	**Curb Ramp Required**	**W**	**$7,000.00**
48 E Yosemite Ave and **N A St**				**$7,250.00**
	4467	**Perpendicular**	**E**	**$500.00**
	4466	**Perpendicular**	**N**	**$3,000.00**
	4468	**Perpendicular**	**S**	**$3,250.00**
	4465	**Perpendicular**	**W**	**$500.00**
47 E Yosemite Ave and **N B St**				**$4,500.00**
	4461	**Perpendicular**	**E**	**$500.00**
	4464	**Perpendicular**	**N**	**$500.00**
	4462	**Perpendicular**	**S**	**$3,000.00**
	4463	**Perpendicular**	**W**	**$500.00**
49 E Yosemite Ave and **N C St**				**$11,000.00**
	3654	**Parallel**	**E**	**$3,500.00**
	3653	**Parallel**	**N**	**$500.00**
	3651	**Parallel**	**S**	**$3,500.00**
	3652	**Parallel**	**W**	**$3,500.00**
44 E Yosemite Ave and **N E St**				**$27,000.00**
	4482	**Parallel**	**E**	**$7,000.00**
	4480	**Perpendicular**	**N**	**$6,500.00**
	4483	**Perpendicular**	**S**	**$6,500.00**
	4481	**Curb Ramp Required**	**W**	**$7,000.00**
46 E Yosemite Ave and **Pecan Ave**				**$19,500.00**
	2872	**Perpendicular**	**NE**	**$6,500.00**
	2871	**Perpendicular**	**NW**	**$6,500.00**

2873	No Sidewalk, Curb Ramp Not Required	SE	$0.00
2874	Perpendicular	SW	$6,500.00
706 E Yosemite Ave and S Gateway Dr			**$26,500.00**
4484	Perpendicular	E	$6,500.00
4487	Perpendicular	N	$6,500.00
4485	Perpendicular	S	$6,500.00
4486	Parallel	W	$7,000.00
51 E Yosemite Ave and S Lake St			**$26,000.00**
4489	Perpendicular	E	$6,500.00
4490	Perpendicular	N	$6,500.00
4488	Perpendicular	S	$6,500.00
4491	Perpendicular	W	$6,500.00
152 E Yosemite Ave and Storey Rd			**$0.00**
4038	No Sidewalk, Curb Ramp Not Required	E	$0.00
4039	No Sidewalk, Curb Ramp Not Required	NW	$0.00
4037	No Sidewalk, Curb Ramp Not Required	S	$0.00
1004 E Yosemite Ave and Vineyard Ave			**$17,000.00**
4348	Parallel	N	$3,500.00
4349	Curb Ramp Required	S	$7,000.00
4350	Perpendicular	W	$6,500.00

Total Cost for Street: Echo St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1489 Echo St and			**$0.00**
2168	Driveway	W	$0.00

Total Cost for Street: Eighth St — $70,000.00

Intersection ID and Street Names:	Type:	Orientation:	
855 Eighth St and S H St			**$14,000.00**
4223	Perpendicular	E	$7,000.00
4222	Perpendicular	N	$7,000.00
4221	No Sidewalk, Curb Ramp Not Required	W	$0.00
1419 Eighth St and S J St			**$28,000.00**
137	Combination	E	$7,000.00
140	Combination	N	$7,000.00
138	Perpendicular	S	$7,000.00
139	Perpendicular	W	$7,000.00
1420 Eighth St and S K St			**$28,000.00**
130	Combination	E	$7,000.00
127	Perpendicular	N	$7,000.00
129	Perpendicular	S	$7,000.00
128	Combination	W	$7,000.00

Total Cost for Street: Eisenhower Ln — $47,000.00

Intersection ID and Street Names:	Type:	Orientation:	
375 Eisenhower Ln and Coolidge St			**$20,000.00**
2028	**Curb Ramp Required**	**N**	**$7,000.00**
2029	**Perpendicular**	**SE**	**$6,500.00**
2030	**Perpendicular**	**SW**	**$6,500.00**
374 Eisenhower Ln and Madison Dr			**$13,500.00**
2037	**Curb Ramp Required**	**NW**	**$7,000.00**
2038	**Perpendicular**	**SE**	**$6,500.00**
1515 Eisenhower Ln and Truman Dr			**$13,500.00**
1954	**Curb Ramp Required**	**NE**	**$7,000.00**
1955	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: El Dorado Dr — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
912 El Dorado Dr and Madera Ave			**$16,750.00**
3571	**Perpendicular**	**NE**	**$3,250.00**
3570	**Curb Ramp Required**	**NW**	**$7,000.00**
3572	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: El Monte Ave — $33,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1510 El Monte Ave and Stadium Rd			**$33,000.00**
392	**Curb Ramp Required**	**E**	**$7,000.00**
390	**Perpendicular**	**NW**	**$6,500.00**
394	**Perpendicular**	**SE**	**$6,500.00**
391	**Perpendicular**	**SW**	**$6,500.00**
393	**Perpendicular**	**WSW**	**$6,500.00**

Total Cost for Street: El Monte Ct — $10,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1189 El Monte Ct and Monterey St			**$10,000.00**
355	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
356	**Perpendicular**	**SE**	**$3,000.00**
354	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: El Monte St — $6,500.00

Intersection ID and Street Names:	Type:	Orientation:

1508 El Monte St and			**$6,500.00**
319	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Elm Ave — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
411 Elm Ave and **Santa Fe Ct**			**$16,000.00**
3221	**Curb Ramp Required**	**E**	**$7,000.00**
3219	**Perpendicular**	**S**	**$2,500.00**
3220	**Perpendicular**	**W**	**$6,500.00**
410 Elm Ave and **Santa Fe St**			**$10,000.00**
3216	**Perpendicular**	**E**	**$2,500.00**
3217	**Perpendicular**	**N**	**$500.00**
3218	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Emerald Way — $27,750.00

Intersection ID and Street Names:	Type:	Orientation:	
143 Emerald Way and **Scarlet Dr**			**$17,500.00**
4437	**Parallel**	**N**	**$3,500.00**
4439	**Perpendicular**	**SE**	**$7,000.00**
4438	**Perpendicular**	**SW**	**$7,000.00**
144 Emerald Way and **Storey Rd**			**$10,250.00**
4441	**Perpendicular**	**NE**	**$7,000.00**
4442	**Perpendicular**	**NW**	**$3,250.00**
4440	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: Emily Way — $32,750.00

Intersection ID and Street Names:	Type:	Orientation:	
371 Emily Way and **Bo Tree Ln**			**$9,500.00**
2925	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2924	**Perpendicular**	**NW**	**$6,500.00**
2923	**Perpendicular**	**SW**	**$3,000.00**
372 Emily Way and **Gary Ln**			**$13,500.00**
2911	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2910	**Perpendicular**	**NW**	**$6,500.00**
2912	**Curb Ramp Required**	**SW**	**$7,000.00**
370 Emily Way and **Joya Dr**			**$9,750.00**
2887	**Perpendicular**	**NW**	**$6,500.00**
2889	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2888	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Express Ct — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
681 Express Ct and Glade Ave			**$20,000.00**
2271	**Perpendicular**	**NE**	**$6,500.00**
2272	**Perpendicular**	**SE**	**$6,500.00**
2273	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Fairfield Way — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1496 Fairfield Way and			**$16,500.00**
2345	**Curb Ramp Required**	**NW**	**$7,000.00**
2343	**Perpendicular**	**SE**	**$6,500.00**
2344	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Fairview Ave — $35,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1325 Fairview Ave and Fifth St			**$21,000.00**
524	**Combination**	**NE**	**$7,000.00**
523	**Combination**	**NW**	**$7,000.00**
525	**Combination**	**SE**	**$7,000.00**
522	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1324 Fairview Ave and Fourth St			**$14,000.00**
494	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
493	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
496	**Combination**	**SE**	**$7,000.00**
495	**Combination**	**SW**	**$7,000.00**
1404 Fairview Ave and Third St			**$0.00**
455	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
454	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
456	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
457	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Fairview St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
331 Fairview St and Adell St			**$0.00**
4494	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
4493	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4492	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
332 Fairview St and W Clark St			**$0.00**

3864	No Sidewalk, Curb Ramp Not Required	NE	$0.00
3863	No Sidewalk, Curb Ramp Not Required	NW	$0.00
3865	No Sidewalk, Curb Ramp Not Required	S	$0.00

Total Cost for Street: Fall Ave — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
213 Fall Ave and Westgate Dr			**$0.00**
1741	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1740	No Sidewalk, Curb Ramp Not Required	NW	$0.00
1739	No Sidewalk, Curb Ramp Not Required	S	$0.00

Total Cost for Street: Ficklin Dr — $13,250.00

Intersection ID and Street Names:	Type:	Orientation:	
29 Ficklin Dr and Chatom Way			**$13,250.00**
228	Curb Ramp Required	N	$7,000.00
229	Perpendicular	SE	$3,000.00
230	Perpendicular	SW	$3,250.00

Total Cost for Street: Fifth St — $119,250.00

Intersection ID and Street Names:	Type:	Orientation:	
873 Fifth St and N J St			**$17,250.00**
173	Perpendicular	E	$3,250.00
174	Curb Ramp Required	N	$7,000.00
175	Perpendicular	S	$7,000.00
1295 Fifth St and N L St			**$26,500.00**
180	Perpendicular	E	$7,000.00
181	Perpendicular	N	$7,000.00
182	Parallel	NW	$3,000.00
183	Perpendicular	S	$6,500.00
187	Parallel	SW	$3,000.00
1296 Fifth St and N M St			**$24,500.00**
184	Combination	E	$7,000.00
185	Combination	N	$7,000.00
188	Combination	S	$7,000.00
186	Combination	W	$3,500.00
1308 Fifth St and N N St			**$28,000.00**
189	Curb Ramp Required	E	$7,000.00
190	Combination	N	$7,000.00
192	Combination	S	$7,000.00
191	Combination	W	$7,000.00
1307 Fifth St and N O St			**$16,500.00**

619	**Perpendicular**	**E**	**$6,500.00**
620	**Combination**	**N**	**$7,000.00**
618	**Combination**	**S**	**$3,000.00**
617	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1104 Fifth St and **Pine St**			**$6,500.00**
2728	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2729	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2727	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Fig Ave **$13,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1017 Fig Ave and **Cross St**			**$3,250.00**
3182	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3180	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
3181	**Perpendicular**	**W**	**$3,250.00**
1018 Fig Ave and **E Yosemite Ave**			**$10,000.00**
3183	**Perpendicular**	**E**	**$3,000.00**
3185	**Curb Ramp Required**	**N**	**$7,000.00**
3184	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1208 Fig Ave and **Washington St**			**$0.00**
3187	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3188	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
3186	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Fillmore Ave **$21,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
170 Fillmore Ave and **Imperial Dr**			**$21,000.00**
696	**Perpendicular**	**NE**	**$7,000.00**
697	**Perpendicular**	**SE**	**$7,000.00**
695	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Fisk Ct **$17,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
803 Fisk Ct and **Central Pl**			**$17,250.00**
840	**Perpendicular**	**NE**	**$7,000.00**
841	**Perpendicular**	**SE**	**$3,250.00**
839	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Forum Way **$42,500.00**

Intersection ID and Street Names:	Type:	Orientation:

323 Forum Way and Glenville Ave				**$16,500.00**
	2319	**Curb Ramp Required**	**NE**	**$7,000.00**
	2320	**Perpendicular**	**NW**	**$3,000.00**
	2321	**Perpendicular**	**SW**	**$6,500.00**
321 Forum Way and N Westberry Blv				**$26,000.00**
	2304	**Perpendicular**	**NE**	**$6,500.00**
	2303	**Perpendicular**	**NW**	**$6,500.00**
	2301	**Perpendicular**	**SE**	**$6,500.00**
	2302	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Foster Ave **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1198 Foster Ave and N Park Dr			**$0.00**
927	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
929	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
928	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Fountain Way **$42,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
254 Fountain Way and Wessmith Way			**$26,000.00**
2199	**Perpendicular**	**NE**	**$6,500.00**
2196	**Perpendicular**	**NW**	**$6,500.00**
2198	**Perpendicular**	**SE**	**$6,500.00**
2197	**Perpendicular**	**SW**	**$6,500.00**
252 Fountain Way and Wrenwood Way			**$16,750.00**
2193	**Curb Ramp Required**	**E**	**$7,000.00**
2194	**Perpendicular**	**NW**	**$3,250.00**
2195	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Fourth St **$108,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1392 Fourth St and Krest St			**$0.00**
580	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
579	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
581	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
578	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1021 Fourth St and N K St			**$21,000.00**
980	**Curb Ramp Required**	**E**	**$7,000.00**
979	**Perpendicular**	**S**	**$7,000.00**
981	**Perpendicular**	**W**	**$7,000.00**
1293 Fourth St and N L St			**$28,000.00**

204	**Perpendicular**	**E**	**$7,000.00**
203	**Perpendicular**	**N**	**$7,000.00**
201	**Perpendicular**	**S**	**$7,000.00**
202	**Perpendicular**	**W**	**$7,000.00**
1294 Fourth St and **N M St**			**$28,000.00**
200	**Perpendicular**	**E**	**$7,000.00**
199	**Perpendicular**	**N**	**$7,000.00**
197	**Perpendicular**	**S**	**$7,000.00**
198	**Perpendicular**	**W**	**$7,000.00**
1095 Fourth St and **N P St**			**$10,500.00**
512	**Perpendicular**	**E**	**$500.00**
510	**Curb Ramp Required**	**NW**	**$7,000.00**
511	**Perpendicular**	**S**	**$3,000.00**
1394 Fourth St and **Rotan Ave**			**$21,000.00**
500	**Combination**	**NE**	**$7,000.00**
497	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
499	**Combination**	**SE**	**$7,000.00**
498	**Combination**	**SW**	**$7,000.00**
1442 Fourth St and **Schnoor Ave**			**$0.00**
598	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
597	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
599	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
600	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1014 Fourth St and **Shannon Ave**			**$0.00**
576	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
577	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
575	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
923 Fourth St and **Williams Ave**			**$0.00**
488	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
487	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
486	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1363 Fourth St and **Willis Ave**			**$0.00**
491	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
490	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
492	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
489	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Foxglove Way **$65,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
697 Foxglove Way and **N Granada Dr**			**$19,500.00**
2417	**Perpendicular**	**NE**	**$6,500.00**
2418	**Perpendicular**	**NW**	**$6,500.00**
2416	**Perpendicular**	**SE**	**$6,500.00**

770	**Foxglove Way** and **Sundance Ln**			**$20,000.00**
	2419	**Curb Ramp Required**	**NW**	**$7,000.00**
	2421	**Perpendicular**	**SE**	**$6,500.00**
	2420	**Perpendicular**	**SW**	**$6,500.00**
769	**Foxglove Way** and **W Cleveland Ave**			**$26,000.00**
	2392	**Perpendicular**	**NE**	**$6,500.00**
	2393	**Perpendicular**	**NW**	**$6,500.00**
	2391	**Perpendicular**	**SE**	**$6,500.00**
	2390	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Fresno St **$21,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
680	**Fresno St** and **Daulton Ave**		**$0.00**
4077	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4076	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4078	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4079	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
593	**Fresno St** and **E Clark St**		**$7,000.00**
2232	**Curb Ramp Required**	**N**	**$7,000.00**
2233	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2234	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
679	**Fresno St** and **E Lincoln Ave**		**$14,000.00**
4107	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4106	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4104	**Curb Ramp Required**	**SE**	**$7,000.00**
4105	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Gamay Ave **$122,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1076	**Gamay Ave** and **Barbera Ave**		**$20,000.00**
2543	**Curb Ramp Required**	**NE**	**$7,000.00**
2542	**Perpendicular**	**SE**	**$6,500.00**
2544	**Perpendicular**	**SW**	**$6,500.00**
898	**Gamay Ave** and **Chablis Ave**		**$16,500.00**
2546	**Curb Ramp Required**	**NE**	**$7,000.00**
2545	**Perpendicular**	**SE**	**$3,000.00**
2547	**Perpendicular**	**SW**	**$6,500.00**
1511	**Gamay Ave** and **Fair Oak Ave**		**$6,500.00**
395	**Perpendicular**	**NE**	**$6,500.00**
913	**Gamay Ave** and **Petite Ave**		**$30,000.00**
2561	**Perpendicular**	**NW**	**$10,000.00**

2539	**Perpendicular**	**SE**	**$6,500.00**
2562	**Curb Ramp Required**	**SW**	**$13,500.00**
585 Gamay Ave and **S Timberline Dr**			**$15,750.00**
2585	**Perpendicular**	**NE**	**$3,000.00**
2582	**Perpendicular**	**NW**	**$6,500.00**
2584	**Perpendicular**	**SE**	**$3,000.00**
2583	**Perpendicular**	**SW**	**$3,250.00**
568 Gamay Ave and **Stadium Rd**			**$26,500.00**
397	**Curb Ramp Required**	**E**	**$7,000.00**
398	**Perpendicular**	**NW**	**$6,500.00**
399	**Perpendicular**	**SW**	**$6,500.00**
396	**Perpendicular**	**WNW**	**$6,500.00**
586 Gamay Ave and **Westberry Bvd**			**$7,000.00**
2580	**Perpendicular**	**NE**	**$500.00**
2581	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2579	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Gamay St **$36,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
946 Gamay St and **Blueridge Dr**			**$20,000.00**
420	**Perpendicular**	**NE**	**$6,500.00**
419	**Perpendicular**	**NW**	**$6,500.00**
418	**Curb Ramp Required**	**S**	**$7,000.00**
255 Gamay St and **Stadium Rd**			**$16,500.00**
417	**Perpendicular**	**NE**	**$6,500.00**
416	**Perpendicular**	**SE**	**$3,000.00**
415	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Garfield Ave **$28,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
831 Garfield Ave and **Fresno St**			**$0.00**
4110	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4109	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4111	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4108	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
805 Garfield Ave and **Merced St**			**$0.00**
4113	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4112	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4114	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4115	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
114 Garfield Ave and **N Lake St**			**$21,000.00**
4136	**Perpendicular**	**NE**	**$7,000.00**

4138	Perpendicular	SE	$7,000.00
4137	Curb Ramp Required	W	$7,000.00
95 Garfield Ave and Tulare St			**$7,000.00**
4117	Curb Ramp Required	E	$7,000.00
4116	No Sidewalk, Curb Ramp Not Required	NW	$0.00
4118	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Gary Ln — $48,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1197 Gary Ln and Colombard Dr			**$16,250.00**
288	Perpendicular	NE	$3,250.00
289	Perpendicular	NW	$3,250.00
287	Perpendicular	SE	$6,500.00
286	Perpendicular	SW	$3,250.00
1196 Gary Ln and Seneca Dr			**$26,000.00**
284	Perpendicular	NE	$6,500.00
283	Perpendicular	NW	$6,500.00
285	Perpendicular	SE	$6,500.00
282	Perpendicular	SW	$6,500.00
403 Gary Ln and Stadium Rd			**$6,500.00**
238	Under Construction	NE	$0.00
240	Perpendicular	SE	$6,500.00
239	Under Construction	W	$0.00

Total Cost for Street: Gateway Dr — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
105 Gateway Dr and S Gateway Dr			**$21,000.00**
4424	Curb Ramp Required	NE	$7,000.00
4422	Perpendicular	S	$7,000.00
4423	Perpendicular	W	$7,000.00

Total Cost for Street: Georgia Ave — $36,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1603 Georgia Ave and Lemon Ave			**$10,000.00**
3764	Curb Ramp Required	E	$7,000.00
3763	Perpendicular	W	$3,000.00
1604 Georgia Ave and Lime Ave			**$13,250.00**
3766	Perpendicular	E	$3,000.00
3765	Perpendicular	S	$3,250.00
3767	Curb Ramp Required	W	$7,000.00
430 Georgia Ave and Valencia Ave			**$13,250.00**

3734	Perpendicular	E	$3,000.00
3735	Perpendicular	S	$3,250.00
3736	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Georgia Ct **$12,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
621 Georgia Ct and Valencia Ave			**$12,000.00**
3731	Perpendicular	N	$2,500.00
3732	Curb Ramp Required	NE	$7,000.00
3733	Perpendicular	SW	$2,500.00

Total Cost for Street: Gill Ave **$7,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
274 Gill Ave and Noble St			**$7,000.00**
2767	Curb Ramp Required	NW	$7,000.00
2768	No Sidewalk, Curb Ramp Not Required	SE	$0.00

Total Cost for Street: Glenville Ave **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
671 Glenville Ave and Common Way			**$16,500.00**
2316	Perpendicular	NW	$6,500.00
2318	Curb Ramp Required	SE	$7,000.00
2317	Perpendicular	SW	$3,000.00

Total Cost for Street: Gold St **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1020 Gold St and Redwood Dr			**$0.00**
961	No Sidewalk, Curb Ramp Not Required	E	$0.00
960	No Sidewalk, Curb Ramp Not Required	NW	$0.00
959	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1019 Gold St and S Park Dr			**$0.00**
963	No Sidewalk, Curb Ramp Not Required	NE	$0.00
964	No Sidewalk, Curb Ramp Not Required	NW	$0.00
962	No Sidewalk, Curb Ramp Not Required	S	$0.00

Total Cost for Street: Golden State Dr **$19,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
591 Golden State Dr and Almond Ave			**$19,500.00**
4419	No Sidewalk, Curb Ramp Not Required	NE	$0.00

4421	**Perpendicular**	**NW**	**$6,500.00**
4418	**Perpendicular**	**SE**	**$6,500.00**
4420	**Perpendicular**	**SW**	**$6,500.00**
563 Golden State Dr and Gary Ln			**$0.00**
4417	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4415	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
4416	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Granada Dr **$81,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1476 Granada Dr and Apple Tree Dr			**$13,000.00**
2691	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2690	**Perpendicular**	**NW**	**$6,500.00**
2689	**Perpendicular**	**SW**	**$6,500.00**
965 Granada Dr and Holiday Way			**$0.00**
1646	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1648	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1647	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1188 Granada Dr and Industrial Ave			**$17,250.00**
1906	**Perpendicular**	**NE**	**$3,250.00**
1905	**Perpendicular**	**SE**	**$7,000.00**
1904	**Curb Ramp Required**	**W**	**$7,000.00**
510 Granada Dr and Mitchell Ct			**$6,500.00**
2568	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2569	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2567	**Perpendicular**	**SE**	**$6,500.00**
964 Granada Dr and National Ave			**$0.00**
1650	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1652	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1649	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1651	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
674 Granada Dr and Plumas Street			**$20,500.00**
1879	**Curb Ramp Required**	**E**	**$7,000.00**
1880	**Perpendicular**	**NW**	**$6,500.00**
1881	**Perpendicular**	**SW**	**$7,000.00**
1253 Granada Dr and Sunnydale St			**$0.00**
1623	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1622	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1624	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1409 Granada Dr and Third St			**$0.00**
1735	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1734	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1732	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

1733	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1194 Granada Dr and W Almond Ave			**$24,250.00**
1917	**Perpendicular**	**NE**	**$7,000.00**
1919	**Perpendicular**	**NW**	**$3,250.00**
1918	**Parallel**	**SE**	**$7,000.00**
1920	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Grant Ave — $35,000.00

Intersection ID and Street Names:	Type:	Orientation:	
919 Grant Ave and Fresno St			**$0.00**
4129	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4128	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4126	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4127	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
212 Grant Ave and N Lake St			**$21,000.00**
4131	**Perpendicular**	**NE**	**$7,000.00**
4132	**Perpendicular**	**SE**	**$7,000.00**
4130	**Curb Ramp Required**	**W**	**$7,000.00**
406 Grant Ave and Tulare St			**$14,000.00**
4120	**Curb Ramp Required**	**E**	**$7,000.00**
4119	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4121	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Grapefruit Way — $30,000.00

Intersection ID and Street Names:	Type:	Orientation:	
13 Grapefruit Way and Georgia Ave			**$13,000.00**
3750	**Curb Ramp Required**	**E**	**$7,000.00**
3749	**Perpendicular**	**S**	**$3,000.00**
3748	**Perpendicular**	**W**	**$3,000.00**
14 Grapefruit Way and Valencia Ave			**$17,000.00**
3738	**Curb Ramp Required**	**E**	**$7,000.00**
3737	**Perpendicular**	**N**	**$3,000.00**
3739	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Green Way — $27,500.00

Intersection ID and Street Names:	Type:	Orientation:	
826 Green Way and Austin Ave			**$0.00**
1370	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1369	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1368	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
824 Green Way and Dellavalle Ave			**$0.00**

1366	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1365	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1367	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1364	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
385 Green Way and Fresno St			**$0.00**
4027	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4026	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4029	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4028	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
384 Green Way and Merced St			**$21,000.00**
4034	**Curb Ramp Required**	**E**	**$7,000.00**
4036	**Combination**	**NW**	**$7,000.00**
4035	**Combination**	**SW**	**$7,000.00**
827 Green Way and N D St			**$6,500.00**
1340	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1343	**Perpendicular**	**NW**	**$6,500.00**
1341	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1342	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
825 Green Way and Nebraska Ave			**$0.00**
1359	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1358	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1356	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1357	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Greenwood Dr **$33,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1118 Greenwood Dr and Monocott Dr			**$16,750.00**
1574	**Perpendicular**	**NE**	**$6,500.00**
1573	**Perpendicular**	**SE**	**$3,250.00**
1572	**Curb Ramp Required**	**W**	**$7,000.00**
1117 Greenwood Dr and Sandlewood Dr			**$16,750.00**
1569	**Curb Ramp Required**	**N**	**$7,000.00**
1570	**Perpendicular**	**SE**	**$6,500.00**
1571	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Grenache Ave **$40,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1528 Grenache Ave and Chianti Ave			**$13,500.00**
2553	**Perpendicular**	**NE**	**$6,500.00**
2554	**Curb Ramp Required**	**SE**	**$7,000.00**
1527 Grenache Ave and Gamay Ave			**$10,250.00**
2549	**Curb Ramp Required**	**NW**	**$7,000.00**

2548	**Perpendicular**	**SE**	**$3,250.00**

899 Grenache Ave and **Merlot Ave** **$16,750.00**

2550	**Perpendicular**	**NE**	**$3,250.00**
2551	**Perpendicular**	**SE**	**$6,500.00**
2552	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Hacienda St **$62,000.00**

Intersection ID and Street Names: Type: Orientation:

764 Hacienda St and **Apple Ct** **$26,000.00**

3475	**Perpendicular**	**NE**	**$6,500.00**
3472	**Perpendicular**	**NW**	**$6,500.00**
3474	**Perpendicular**	**SE**	**$6,500.00**
3473	**Perpendicular**	**SW**	**$6,500.00**

66 Hacienda St and **La Quinta Way** **$16,000.00**

3470	**Curb Ramp Required**	**NE**	**$7,000.00**
3469	**Perpendicular**	**SE**	**$6,500.00**
3471	**Perpendicular**	**SW**	**$2,500.00**

65 Hacienda St and **Pomegranate St** **$20,000.00**

3483	**Curb Ramp Required**	**NE**	**$7,000.00**
3481	**Perpendicular**	**NW**	**$6,500.00**
3482	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Half Dome Ct **$20,000.00**

Intersection ID and Street Names: Type: Orientation:

645 Half Dome Ct and **Monterey St** **$20,000.00**

348	**Curb Ramp Required**	**E**	**$7,000.00**
350	**Perpendicular**	**NW**	**$6,500.00**
349	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Harrison Ct **$20,500.00**

Intersection ID and Street Names: Type: Orientation:

794 Harrison Ct and **Jefferson Ave** **$20,500.00**

729	**Perpendicular**	**NE**	**$6,500.00**
728	**Perpendicular**	**NW**	**$7,000.00**
727	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Harvard Ave **$40,500.00**

Intersection ID and Street Names: Type: Orientation:

1153 Harvard Ave and **Jefferson Ave** **$20,500.00**

865	**Curb Ramp Required**	**E**	**$7,000.00**

867	**Perpendicular**	**NW**	**$7,000.00**
866	**Perpendicular**	**SW**	**$6,500.00**
1154 Harvard Ave and **Princeton Ave**			**$20,000.00**
862	**Curb Ramp Required**	**E**	**$7,000.00**
864	**Perpendicular**	**NW**	**$6,500.00**
863	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Hawk Ln — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
110 Hawk Ln and **Blue Sky Ln**			**$0.00**
2124	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2125	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2127	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2126	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
113 Hawk Ln and **Eagle Dr**			**$0.00**
2134	**Driveway**	**E**	**$0.00**
111 Hawk Ln and **Meadow Lark Way**			**$0.00**
2120	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2121	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2123	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2122	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
112 Hawk Ln and **Merced St**			**$16,750.00**
2114	**Curb Ramp Required**	**E**	**$7,000.00**
2116	**Perpendicular**	**NW**	**$3,250.00**
2115	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Hazel Ave — $8,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1503 Hazel Ave and **Lemon Ave**			**$5,500.00**
3761	**Perpendicular**	**NE**	**$3,000.00**
3760	**Perpendicular**	**NW**	**$2,500.00**
3762	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1602 Hazel Ave and **Raymond Thomas St**			**$2,500.00**
3746	**Perpendicular**	**NE**	**$2,500.00**
3747	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Hazelnut Dr — $10,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1532 Hazelnut Dr and **Cherry Tree Dr**			**$10,000.00**
2635	**Perpendicular**	**NE**	**$3,000.00**
2636	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Helena Way — $43,000.00

Intersection ID and Street Names:	Type:	Orientation:	
719 Helena Way and Concord Ave			**$13,500.00**
278	Perpendicular	NE	$3,250.00
277	Perpendicular	NW	$3,250.00
276	Curb Ramp Required	S	$7,000.00
1005 Helena Way and Monterey St			**$9,500.00**
274	Perpendicular	NE	$6,500.00
275	Perpendicular	SE	$3,000.00
273	No Sidewalk, Curb Ramp Not Required	W	$0.00
718 Helena Way and Seneca Dr			**$20,000.00**
279	Curb Ramp Required	E	$7,000.00
281	Perpendicular	NW	$6,500.00
280	Perpendicular	SW	$6,500.00

Total Cost for Street: Hickory Ave — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1088 Hickory Ave and Chestnut Ave			**$16,500.00**
2939	Perpendicular	NW	$6,500.00
2938	Curb Ramp Required	SE	$7,000.00
2937	Perpendicular	SW	$3,000.00

Total Cost for Street: Hillsboro Ave — $97,500.00

Intersection ID and Street Names:	Type:	Orientation:	
249 Hillsboro Ave and Fairfield Way			**$18,000.00**
2337	Perpendicular	NE	$2,500.00
2336	Perpendicular	NW	$6,500.00
2338	Perpendicular	SE	$2,500.00
2339	Perpendicular	SW	$6,500.00
247 Hillsboro Ave and Fairway Ave			**$16,750.00**
2280	Perpendicular	NW	$3,250.00
2282	Curb Ramp Required	SE	$7,000.00
2281	Perpendicular	SW	$6,500.00
250 Hillsboro Ave and Glade Ave			**$20,000.00**
2276	Curb Ramp Required	NW	$7,000.00
2275	Perpendicular	SE	$6,500.00
2274	Perpendicular	SW	$6,500.00
246 Hillsboro Ave and Glenville Ave			**$16,500.00**
2277	Curb Ramp Required	NE	$7,000.00
2278	Perpendicular	NW	$6,500.00

2279	**Perpendicular**	**SW**	**$3,000.00**
245 Hillsboro Ave and **Hampton Dr**			**$6,250.00**
2341	**Perpendicular**	**NE**	**$3,250.00**
2342	**Perpendicular**	**NW**	**$3,000.00**
2340	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
248 Hillsboro Ave and **Mateo Way**			**$20,000.00**
2283	**Curb Ramp Required**	**NE**	**$7,000.00**
2284	**Perpendicular**	**NW**	**$6,500.00**
2285	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Hilton St **$7,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1427 Hilton St and **Fourth St**			**$0.00**
591	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
590	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
592	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
593	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
918 Hilton St and **National Ave**			**$7,000.00**
556	**Curb Ramp Required**	**N**	**$7,000.00**
557	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
558	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Holiday Ct **$14,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1053 Holiday Ct and **Valley Way**			**$14,000.00**
1664	**Perpendicular**	**NE**	**$7,000.00**
1665	**Perpendicular**	**SE**	**$7,000.00**
1663	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Hollow Ave **$29,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
329 Hollow Ave and **N Westberry Blv**			**$9,000.00**
2353	**Perpendicular**	**NE**	**$6,500.00**
2352	**Perpendicular**	**SE**	**$2,500.00**
330 Hollow Ave and **Tiburon Way**			**$20,000.00**
2351	**Curb Ramp Required**	**NE**	**$7,000.00**
2349	**Perpendicular**	**NW**	**$6,500.00**
2350	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Hoover Ave — $26,750.00

Intersection ID and Street Names:	Type:	Orientation:	
564 Hoover Ave and Coolidge St			**$16,500.00**
1965	**Curb Ramp Required**	**N**	**$7,000.00**
1967	**Perpendicular**	**SE**	**$6,500.00**
1966	**Perpendicular**	**SW**	**$3,000.00**
1516 Hoover Ave and Truman Dr			**$10,250.00**
1968	**Curb Ramp Required**	**NE**	**$7,000.00**
1969	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Howard Rd — $187,750.00

Intersection ID and Street Names:	Type:	Orientation:	
750 Howard Rd and Amerine Ave			**$13,500.00**
2701	**Parallel**	**NE**	**$3,500.00**
2702	**Parallel**	**NW**	**$3,500.00**
2700	**Perpendicular**	**SE**	**$6,500.00**
689 Howard Rd and Asilomar Dr			**$14,000.00**
1792	**Perpendicular**	**NE**	**$7,000.00**
1793	**Perpendicular**	**NW**	**$7,000.00**
1791	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1341 Howard Rd and Autumn Rd			**$14,000.00**
1832	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1831	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1829	**Perpendicular**	**SE**	**$7,000.00**
1830	**Perpendicular**	**SW**	**$7,000.00**
1283 Howard Rd and Berry Dr			**$0.00**
1768	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1771	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1769	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1770	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1002 Howard Rd and Dwayer Ave			**$17,000.00**
2698	**Curb Ramp Required**	**NE**	**$7,000.00**
2697	**Perpendicular**	**SE**	**$6,500.00**
2699	**Parallel**	**SW**	**$3,500.00**
1233 Howard Rd and Fairview Ave			**$23,250.00**
2713	**Perpendicular**	**NE**	**$6,500.00**
2712	**Perpendicular**	**NW**	**$3,250.00**
2714	**Perpendicular**	**SE**	**$6,500.00**
2715	**Combination**	**SW**	**$7,000.00**
1385 Howard Rd and Granada Dr			**$11,500.00**

1819	**Perpendicular**	**NE**	**$500.00**
1820	**Perpendicular**	**NW**	**$500.00**
1822	**Parallel**	**SE**	**$3,500.00**
1821	**Perpendicular**	**SW**	**$7,000.00**
933 Howard Rd and Hilton St			**$0.00**
1806	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1810	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1811	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1809	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1808	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
932 Howard Rd and Krest St			**$0.00**
1814	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1812	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1813	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1036 Howard Rd and Mainberry Dr			**$0.00**
1818	**Driveway**	**S**	**$0.00**
1432 Howard Rd and Pine St			**$6,000.00**
2721	**Perpendicular**	**NE**	**$3,000.00**
2720	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2722	**Perpendicular**	**SE**	**$3,000.00**
2723	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
963 Howard Rd and Point West			**$3,000.00**
1825	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1823	**Perpendicular**	**NW**	**$3,000.00**
1824	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1156 Howard Rd and Rotan Ave			**$16,500.00**
2719	**Parallel**	**NE**	**$7,000.00**
2718	**Perpendicular**	**NW**	**$500.00**
2717	**Perpendicular**	**SE**	**$6,500.00**
2716	**Perpendicular**	**SW**	**$2,500.00**
1497 Howard Rd and Santa Lucia Dr			**$14,000.00**
1790	**Perpendicular**	**NE**	**$7,000.00**
1789	**Perpendicular**	**NW**	**$7,000.00**
1788	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1070 Howard Rd and Sassafras Dr			**$7,000.00**
1730	**Curb Ramp Required**	**NE**	**$7,000.00**
1729	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1731	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1285 Howard Rd and Schnoor Ave			**$19,250.00**
2703	**Perpendicular**	**NE**	**$6,500.00**
2704	**Perpendicular**	**NW**	**$6,500.00**
2706	**Perpendicular**	**SE**	**$3,000.00**
2705	**Perpendicular**	**SW**	**$3,250.00**

1071 Howard Rd and Shannon Ave			**$0.00**
1816	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1815	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1817	**Island-Cut Through**	**S**	**$0.00**
1284 Howard Rd and Spring Ave			**$0.00**
1756	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1755	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1757	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1758	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1138 Howard Rd and Westberry Bvd			**$2,000.00**
1839	**Pedestrian Pad**	**NE**	**$500.00**
1842	**Pedestrian Pad**	**NW**	**$500.00**
1840	**Pedestrian Pad**	**SE**	**$500.00**
1841	**Pedestrian Pad**	**SW**	**$500.00**
1003 Howard Rd and Williams Ave			**$26,750.00**
2709	**Perpendicular**	**ESE**	**$2,500.00**
2710	**Parallel**	**NE**	**$7,000.00**
2711	**Perpendicular**	**NW**	**$3,250.00**
2708	**Parallel**	**SSE**	**$7,000.00**
2707	**Parallel**	**SW**	**$7,000.00**

Total Cost for Street: Hull Ave **$57,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1261 Hull Ave and A St			**$21,000.00**
3420	**Parallel**	**NE**	**$7,000.00**
3423	**Parallel**	**NW**	**$7,000.00**
3421	**Parallel**	**SE**	**$3,500.00**
3422	**Parallel**	**SW**	**$3,500.00**
759 Hull Ave and Lake St			**$20,000.00**
3362	**Perpendicular**	**NW**	**$6,500.00**
3361	**Curb Ramp Required**	**SE**	**$7,000.00**
3360	**Perpendicular**	**SW**	**$6,500.00**
758 Hull Ave and Sunrise Ave			**$16,750.00**
3331	**Curb Ramp Required**	**NE**	**$7,000.00**
3330	**Perpendicular**	**SE**	**$6,500.00**
3332	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Imperial Dr **$14,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
701 Imperial Dr and University Ave			**$14,000.00**
703	**Perpendicular**	**NE**	**$7,000.00**
702	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Independence Dr — $8,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1548 Independence Dr and			**$8,000.00**
2810	**Parallel**	**NE**	**$500.00**
2811	**Parallel**	**NW**	**$500.00**
2812	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Independence Drive — $23,750.00

Intersection ID and Street Names:	Type:	Orientation:	
318 Independence Drive and **Pine St**			**$13,250.00**
2808	**Perpendicular**	**NE**	**$3,000.00**
2807	**Perpendicular**	**NNW**	**$3,000.00**
2809	**Perpendicular**	**SE**	**$500.00**
2805	**Perpendicular**	**SSW**	**$3,250.00**
2806	**Perpendicular**	**WNW**	**$500.00**
2804	**Perpendicular**	**WSW**	**$3,000.00**
319 Independence Drive and **Victory Lane**			**$10,500.00**
2815	**Curb Ramp Required**	**NW**	**$7,000.00**
2813	**Perpendicular**	**SE**	**$3,000.00**
2814	**Perpendicular**	**SW**	**$500.00**

Total Cost for Street: Indigo Dr — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
121 Indigo Dr and **Sepia Ct**			**$21,000.00**
4434	**Parallel**	**E**	**$7,000.00**
4436	**Perpendicular**	**NW**	**$7,000.00**
4435	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Industrial Ave — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
891 Industrial Ave and **Commerce Dr**			**$7,000.00**
1909	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1908	**Perpendicular**	**SE**	**$7,000.00**
1907	**Under Construction**	**SW**	**$0.00**

Total Cost for Street: Ironwood Way — $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1260 Ironwood Way and **Foxglove Way**			**$13,000.00**

2425	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2427	**Perpendicular**	**SE**	**$6,500.00**
2426	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Ivy Glen Dr — $32,500.00

Intersection ID and Street Names:	Type:	Orientation:	
182 Ivy Glen Dr and **Bolinas Way**			**$16,000.00**
2785	**Perpendicular**	**NE**	**$6,500.00**
2787	**Perpendicular**	**NW**	**$2,500.00**
2786	**Curb Ramp Required**	**SE**	**$7,000.00**
181 Ivy Glen Dr and **Diamante Ln**			**$16,500.00**
2782	**Perpendicular**	**NE**	**$3,000.00**
2783	**Perpendicular**	**NW**	**$6,500.00**
2784	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: James Way — $69,000.00

Intersection ID and Street Names:	Type:	Orientation:	
731 James Way and **Austin Ave**			**$34,500.00**
3965	**Curb Ramp Required**	**E**	**$7,000.00**
3961	**Perpendicular**	**NE**	**$6,500.00**
3964	**Perpendicular**	**NW**	**$7,000.00**
3963	**Perpendicular**	**SE**	**$7,000.00**
3966	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
3962	**Curb Ramp Required**	**W**	**$7,000.00**
38 James Way and **Dellavalle Ave**			**$7,000.00**
3972	**Curb Ramp Required**	**N**	**$7,000.00**
3970	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3971	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
40 James Way and **N D St**			**$20,500.00**
3978	**Perpendicular**	**NE**	**$7,000.00**
3976	**Perpendicular**	**SE**	**$6,500.00**
3977	**Curb Ramp Required**	**W**	**$7,000.00**
39 James Way and **Nebraska Ave**			**$7,000.00**
3975	**Curb Ramp Required**	**N**	**$7,000.00**
3973	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3974	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Jefferson Ave — $96,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1126 Jefferson Ave and **Arthur Ct**			**$20,000.00**
726	**Perpendicular**	**NE**	**$6,500.00**

725	Perpendicular	NW	$6,500.00
724	Curb Ramp Required	S	$7,000.00
1133 Jefferson Ave and Central Pl			**$12,750.00**
843	Perpendicular	NE	$2,500.00
844	Perpendicular	NW	$3,250.00
842	Curb Ramp Required	S	$7,000.00
1200 Jefferson Ave and Jackson Ct			**$16,750.00**
732	Perpendicular	NE	$3,250.00
731	Perpendicular	NW	$6,500.00
730	Curb Ramp Required	S	$7,000.00
1400 Jefferson Ave and Orchard Ave			**$26,500.00**
734	Perpendicular	NE	$7,000.00
733	Perpendicular	NW	$6,500.00
735	Perpendicular	SE	$6,500.00
736	Perpendicular	SW	$6,500.00
1056 Jefferson Ave and Williams Ave			**$20,500.00**
845	Curb Ramp Required	N	$7,000.00
846	Perpendicular	SE	$7,000.00
847	Perpendicular	SW	$6,500.00

Total Cost for Street: Jennings St $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1265 Jennings St and Fairview Ave			**$0.00**
472	No Sidewalk, Curb Ramp Not Required	NE	$0.00
471	No Sidewalk, Curb Ramp Not Required	NW	$0.00
469	No Sidewalk, Curb Ramp Not Required	SE	$0.00
470	No Sidewalk, Curb Ramp Not Required	SW	$0.00
938 Jennings St and Pine St			**$0.00**
462	Driveway	E	$0.00
464	No Sidewalk, Curb Ramp Not Required	NW	$0.00
463	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1264 Jennings St and Rotan Ave			**$0.00**
468	No Sidewalk, Curb Ramp Not Required	NE	$0.00
467	No Sidewalk, Curb Ramp Not Required	NW	$0.00
465	No Sidewalk, Curb Ramp Not Required	SE	$0.00
466	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1135 Jennings St and Schnoor Ave			**$0.00**
596	No Sidewalk, Curb Ramp Not Required	NE	$0.00
595	No Sidewalk, Curb Ramp Not Required	SE	$0.00
594	No Sidewalk, Curb Ramp Not Required	W	$0.00
1396 Jennings St and Willis Ave			**$0.00**
476	No Sidewalk, Curb Ramp Not Required	NE	$0.00
475	No Sidewalk, Curb Ramp Not Required	NW	$0.00

473	No Sidewalk, Curb Ramp Not Required	SE	$0.00
474	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Jonathan Way — $3,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1069 Jonathan Way and Stephanie Ln			**$3,000.00**
2496	Perpendicular	NE	$2,500.00
2494	Perpendicular	SE	$500.00
2495	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Joseph Ln — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
106 Joseph Ln and Sonora St			**$13,500.00**
3921	Curb Ramp Required	E	$7,000.00
3922	Perpendicular	NW	$3,250.00
3920	Perpendicular	SW	$3,250.00

Total Cost for Street: Josephine Ct — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
590 Josephine Ct and Jericho Dr			**$16,500.00**
2048	Curb Ramp Required	N	$7,000.00
2050	Perpendicular	SE	$3,000.00
2049	Perpendicular	SW	$6,500.00

Total Cost for Street: Joy St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1143 Joy St and Riverview Dr			**$0.00**
891	No Sidewalk, Curb Ramp Not Required	N	$0.00
889	No Sidewalk, Curb Ramp Not Required	SE	$0.00
890	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Judith Ct — $22,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1317 Judith Ct and Stephanie Ln			**$22,500.00**
2528	Perpendicular	NE	$6,500.00
2527	Perpendicular	NW	$6,500.00
2525	Perpendicular	SE	$6,500.00
2526	Perpendicular	SW	$3,000.00

Total Cost for Street: Judith Way — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
947 Judith Way and Arbella Ln			**$16,500.00**
2506	**Curb Ramp Required**	**NE**	**$7,000.00**
2507	**Perpendicular**	**NW**	**$3,000.00**
2508	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Kathryn Ave — $13,250.00

Intersection ID and Street Names:	Type:	Orientation:	
614 Kathryn Ave and Anna Ave			**$13,250.00**
2079	**Perpendicular**	**NE**	**$3,250.00**
2080	**Perpendicular**	**NW**	**$3,000.00**
2078	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Kent Dr — $54,750.00

Intersection ID and Street Names:	Type:	Orientation:	
791 Kent Dr and Cambria Ave			**$21,000.00**
1613	**Perpendicular**	**NE**	**$7,000.00**
1614	**Perpendicular**	**NW**	**$7,000.00**
1612	**Curb Ramp Required**	**S**	**$7,000.00**
792 Kent Dr and Diane Way			**$12,750.00**
1617	**Perpendicular**	**NE**	**$2,500.00**
1616	**Perpendicular**	**SE**	**$3,250.00**
1615	**Curb Ramp Required**	**W**	**$7,000.00**
678 Kent Dr and Summer Ln			**$21,000.00**
1697	**Perpendicular**	**NE**	**$7,000.00**
1698	**Perpendicular**	**SE**	**$7,000.00**
1696	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Kimberley Ln — $33,500.00

Intersection ID and Street Names:	Type:	Orientation:	
334 Kimberley Ln and Alexis Way			**$20,000.00**
2950	**Perpendicular**	**NE**	**$6,500.00**
2948	**Perpendicular**	**NW**	**$6,500.00**
2949	**Curb Ramp Required**	**SW**	**$7,000.00**
1556 Kimberley Ln and Tevin Way			**$13,500.00**
2951	**Perpendicular**	**NW**	**$6,500.00**
2952	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Kimberly Dr — $35,250.00

Intersection ID and Street Names:	Type:	Orientation:	
511 Kimberly Dr and Deborah Ln			**$16,500.00**
2394	Curb Ramp Required	NE	$7,000.00
2395	Perpendicular	NW	$6,500.00
2396	Perpendicular	SW	$3,000.00
512 Kimberly Dr and Taylor Lane			**$18,750.00**
2397	Perpendicular	NE	$3,250.00
2400	Perpendicular	NW	$6,500.00
2398	Perpendicular	SE	$2,500.00
2399	Perpendicular	SW	$6,500.00

Total Cost for Street: Kimmel Ave — $56,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1015 Kimmel Ave and Kent Dr			**$16,750.00**
1553	Perpendicular	NE	$6,500.00
1552	Perpendicular	SE	$3,250.00
1551	Curb Ramp Required	W	$7,000.00
1016 Kimmel Ave and Westberry Dr			**$23,750.00**
1533	Perpendicular	NE	$7,000.00
1532	Perpendicular	NW	$6,500.00
1534	Perpendicular	SE	$3,250.00
1531	Perpendicular	SW	$7,000.00
1393 Kimmel Ave and Zak Way			**$15,750.00**
1542	Perpendicular	NE	$3,250.00
1543	Perpendicular	NW	$3,000.00
1541	Perpendicular	SE	$6,500.00
1544	Perpendicular	SW	$3,000.00

Total Cost for Street: Kiwi St — $40,000.00

Intersection ID and Street Names:	Type:	Orientation:	
717 Kiwi St and E Almond Ave			**$26,000.00**
3525	Perpendicular	NE	$6,500.00
3524	Perpendicular	NW	$6,500.00
3526	Perpendicular	SE	$6,500.00
3523	Perpendicular	SW	$6,500.00
1594 Kiwi St and Mandarin St			**$14,000.00**
3532	Curb Ramp Required	NE	$7,000.00
3531	Parallel	SW	$7,000.00

Total Cost for Street: Knox Ave — $40,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1206 Knox Ave and Carry Ave			**$20,000.00**
3319	**Perpendicular**	**NE**	**$6,500.00**
3317	**Perpendicular**	**SE**	**$6,500.00**
3318	**Curb Ramp Required**	**SW**	**$7,000.00**
1022 Knox Ave and Lilly St			**$20,000.00**
3316	**Perpendicular**	**NE**	**$6,500.00**
3314	**Perpendicular**	**SE**	**$6,500.00**
3315	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Knox Ct — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
135 Knox Ct and A St			**$20,000.00**
3413	**Curb Ramp Required**	**NW**	**$7,000.00**
3411	**Perpendicular**	**SE**	**$6,500.00**
3412	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Knox St — $162,750.00

Intersection ID and Street Names:	Type:	Orientation:	
116 Knox St and Cherry St			**$16,500.00**
3496	**Curb Ramp Required**	**NE**	**$7,000.00**
3495	**Perpendicular**	**NW**	**$6,500.00**
3494	**Perpendicular**	**SW**	**$3,000.00**
835 Knox St and E Almond Ave			**$20,000.00**
3507	**Perpendicular**	**NE**	**$6,500.00**
3508	**Perpendicular**	**SE**	**$6,500.00**
3509	**Curb Ramp Required**	**SW**	**$7,000.00**
115 Knox St and Los Arcos Ln			**$20,000.00**
3148	**Curb Ramp Required**	**NE**	**$7,000.00**
3149	**Perpendicular**	**NW**	**$6,500.00**
3150	**Perpendicular**	**SW**	**$6,500.00**
117 Knox St and Nectarine St			**$20,500.00**
3504	**Perpendicular**	**NW**	**$6,500.00**
3506	**Curb Ramp Required**	**SE**	**$7,000.00**
3505	**Parallel**	**SW**	**$7,000.00**
118 Knox St and Neplus Way			**$20,000.00**
3105	**Perpendicular**	**NW**	**$6,500.00**
3107	**Curb Ramp Required**	**SE**	**$7,000.00**
3106	**Perpendicular**	**SW**	**$6,500.00**

1318 Knox St and Olive Ave			**$12,500.00**
3102	**Perpendicular**	**NE**	**$3,000.00**
3101	**Perpendicular**	**NW**	**$6,500.00**
3103	**Perpendicular**	**SE**	**$3,000.00**
3104	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1606 Knox St and Ortega Dr			**$20,000.00**
3126	**Perpendicular**	**NE**	**$6,500.00**
3127	**Perpendicular**	**SE**	**$6,500.00**
3128	**Curb Ramp Required**	**SW**	**$7,000.00**
1591 Knox St and Ortega St			**$13,250.00**
3145	**Perpendicular**	**NE**	**$3,250.00**
3146	**Curb Ramp Required**	**NW**	**$7,000.00**
3147	**Perpendicular**	**SE**	**$3,000.00**
1574 Knox St and Pomegranate St			**$20,000.00**
3493	**Perpendicular**	**NE**	**$6,500.00**
3491	**Perpendicular**	**SE**	**$6,500.00**
3492	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Koufax Dr **$23,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1580 Koufax Dr and Drysdale Way			**$10,000.00**
3296	**Curb Ramp Required**	**N**	**$7,000.00**
3295	**Perpendicular**	**S**	**$3,000.00**
282 Koufax Dr and Lilly St			**$13,000.00**
3297	**Perpendicular**	**E**	**$3,000.00**
3298	**Perpendicular**	**S**	**$3,000.00**
3299	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: La Jolla Way **$53,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1116 La Jolla Way and Briquel Ave			**$16,750.00**
2069	**Curb Ramp Required**	**N**	**$7,000.00**
2070	**Perpendicular**	**SE**	**$3,250.00**
2071	**Perpendicular**	**SW**	**$6,500.00**
1463 La Jolla Way and Talise Ave			**$20,000.00**
2067	**Perpendicular**	**NE**	**$6,500.00**
2068	**Perpendicular**	**NW**	**$6,500.00**
2066	**Curb Ramp Required**	**S**	**$7,000.00**
398 La Jolla Way and Zapata St			**$16,500.00**
2058	**Perpendicular**	**NE**	**$6,500.00**
2059	**Perpendicular**	**NW**	**$3,000.00**

2057	Curb Ramp Required	S	$7,000.00

Total Cost for Street: La Perla Ln — $30,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1577 La Perla Ln and Las Fresas Way			**$13,500.00**
3171	Curb Ramp Required	NE	$7,000.00
3170	Perpendicular	SW	$6,500.00
368 La Perla Ln and Varbella Pk			**$16,500.00**
3172	Perpendicular	NE	$6,500.00
3173	Perpendicular	SE	$3,000.00
3174	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: La Quinta Way — $10,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1587 La Quinta Way and San Gabriel Dr			**$10,000.00**
3467	Perpendicular	NW	$3,000.00
3468	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: Lacreta Ave — $86,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1520 Lacreta Ave and Amy Ave			**$13,500.00**
2086	Perpendicular	NE	$3,250.00
2085	Perpendicular	NW	$3,250.00
2084	Curb Ramp Required	S	$7,000.00
1519 Lacreta Ave and Dominguez Dr			**$20,000.00**
2024	Perpendicular	NE	$6,500.00
2023	Perpendicular	NW	$6,500.00
2022	Curb Ramp Required	S	$7,000.00
634 Lacreta Ave and Jericho Dr			**$13,250.00**
2025	Curb Ramp Required	N	$7,000.00
2027	Perpendicular	SE	$3,000.00
2026	Perpendicular	SW	$3,250.00
633 Lacreta Ave and Jesse Dr			**$20,000.00**
2087	Curb Ramp Required	N	$7,000.00
2089	Perpendicular	SE	$6,500.00
2088	Perpendicular	SW	$6,500.00
632 Lacreta Ave and Merced St			**$19,250.00**
2110	Perpendicular	NNW	$3,000.00
2109	Perpendicular	NW	$6,500.00
2108	Perpendicular	SE	$3,250.00
2107	Perpendicular	SSE	$6,500.00

Total Cost for Street: Laguna Way — $67,000.00

Intersection ID and Street Names:	Type:	Orientation:	
301 Laguna Way and Alicante Way			**$16,750.00**
2188	**Perpendicular**	**NE**	**$3,250.00**
2189	**Perpendicular**	**NW**	**$6,500.00**
2187	**Curb Ramp Required**	**S**	**$7,000.00**
298 Laguna Way and Barcelona Way			**$20,000.00**
2191	**Perpendicular**	**NE**	**$6,500.00**
2192	**Perpendicular**	**NW**	**$6,500.00**
2190	**Curb Ramp Required**	**S**	**$7,000.00**
299 Laguna Way and San Sebastian Way			**$13,500.00**
2182	**Perpendicular**	**NE**	**$3,250.00**
2183	**Perpendicular**	**NW**	**$3,250.00**
2181	**Curb Ramp Required**	**S**	**$7,000.00**
300 Laguna Way and Toluca			**$16,750.00**
2185	**Perpendicular**	**NE**	**$6,500.00**
2186	**Perpendicular**	**NW**	**$3,250.00**
2184	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Lake St — $19,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1456 Lake St and Lake St			**$19,750.00**
3359	**Perpendicular**	**NE**	**$3,250.00**
3356	**Perpendicular**	**NW**	**$6,500.00**
3358	**Perpendicular**	**SE**	**$3,000.00**
3357	**Parallel**	**SW**	**$7,000.00**

Total Cost for Street: Lansing St — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1132 Lansing St and Shannon Ave			**$0.00**
573	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
572	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
574	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1302 Lansing St and Westberry Bvd			**$26,000.00**
1455	**Perpendicular**	**NE**	**$6,500.00**
1454	**Perpendicular**	**NW**	**$6,500.00**
1456	**Perpendicular**	**SE**	**$6,500.00**
1453	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Larrete Ave			$32,000.00
Intersection ID and Street Names:	Type:	Orientation:	
359 Larrete Ave and Fairfield Way			**$16,000.00**
2360	**Perpendicular**	**NE**	**$2,500.00**
2358	**Perpendicular**	**NW**	**$6,500.00**
2359	**Curb Ramp Required**	**SW**	**$7,000.00**
358 Larrete Ave and Fairway Ave			**$16,000.00**
2296	**Curb Ramp Required**	**NW**	**$7,000.00**
2294	**Perpendicular**	**SE**	**$2,500.00**
2295	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Las Fresas Way			$20,000.00
Intersection ID and Street Names:	Type:	Orientation:	
696 Las Fresas Way and Las Casas Ln			**$20,000.00**
3169	**Curb Ramp Required**	**NE**	**$7,000.00**
3168	**Perpendicular**	**NW**	**$6,500.00**
3167	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Laurel St			$20,500.00
Intersection ID and Street Names:	Type:	Orientation:	
139 Laurel St and Sunset Ave			**$20,500.00**
1678	**Perpendicular**	**NE**	**$6,500.00**
1677	**Perpendicular**	**NW**	**$7,000.00**
1676	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Lemon Ave			$13,000.00
Intersection ID and Street Names:	Type:	Orientation:	
1467 Lemon Ave and			**$13,000.00**
3772	**Perpendicular**	**E**	**$3,000.00**
3771	**Perpendicular**	**N**	**$3,000.00**
3773	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Lemon Tree Dr			$23,000.00
Intersection ID and Street Names:	Type:	Orientation:	
1533 Lemon Tree Dr and Pear Tree Dr			**$10,250.00**
2652	**Perpendicular**	**NW**	**$3,250.00**
2653	**Curb Ramp Required**	**SE**	**$7,000.00**
16 Lemon Tree Dr and W Almond Ave			**$12,750.00**

2655	**Curb Ramp Required**	**NW**	**$7,000.00**
2656	**Perpendicular**	**SE**	**$3,250.00**
2654	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Liberty Ln — $20,000.00

Intersection ID and Street Names: | Type: | Orientation:

1040 Liberty Ln and State St — **$20,000.00**

1390	**Perpendicular**	**NE**	**$6,500.00**
1391	**Combination**	**S**	**$7,000.00**
1392	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Lighthouse Dr — $42,000.00

Intersection ID and Street Names: | Type: | Orientation:

288 Lighthouse Dr and Harbor Dr — **$21,000.00**

677	**Curb Ramp Required**	**N**	**$7,000.00**
678	**Perpendicular**	**SE**	**$7,000.00**
679	**Perpendicular**	**SW**	**$7,000.00**

290 Lighthouse Dr and Mainberry Dr — **$21,000.00**

648	**Perpendicular**	**NE**	**$7,000.00**
646	**Perpendicular**	**NW**	**$7,000.00**
647	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Lillian St — $7,000.00

Intersection ID and Street Names: | Type: | Orientation:

1006 Lillian St and Riverview Dr — **$7,000.00**

888	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
886	**Curb Ramp Required**	**SE**	**$7,000.00**
887	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Lilly St — $78,000.00

Intersection ID and Street Names: | Type: | Orientation:

1581 Lilly St and — **$9,500.00**

3313	**Perpendicular**	**NE**	**$3,000.00**
3312	**Perpendicular**	**NW**	**$6,500.00**

936 Lilly St and Carry Ave — **$20,000.00**

3310	**Curb Ramp Required**	**NE**	**$7,000.00**
3309	**Perpendicular**	**NW**	**$6,500.00**
3311	**Perpendicular**	**SW**	**$6,500.00**

1254 Lilly St and Cross St — **$0.00**

3262	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**

3263	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3261	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
60 Lilly St and **Koufax Dr**			**$13,000.00**
3301	**Perpendicular**	**E**	**$3,000.00**
3300	**Perpendicular**	**N**	**$3,000.00**
3302	**Curb Ramp Required**	**S**	**$7,000.00**
745 Lilly St and **Sawmill St**			**$19,000.00**
3365	**Perpendicular**	**E**	**$6,500.00**
3364	**Perpendicular**	**S**	**$3,000.00**
3366	**Perpendicular**	**SW**	**$6,500.00**
3363	**Perpendicular**	**W**	**$3,000.00**
744 Lilly St and **Sunrise Ave**			**$16,500.00**
3306	**Perpendicular**	**NE**	**$3,000.00**
3307	**Perpendicular**	**NW**	**$6,500.00**
3308	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Lime Ave **$42,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
407 Lime Ave and **Georgia Ave**			**$16,750.00**
3753	**Curb Ramp Required**	**E**	**$7,000.00**
3752	**Perpendicular**	**N**	**$3,250.00**
3751	**Perpendicular**	**W**	**$6,500.00**
1469 Lime Ave and **Mango Ave**			**$13,000.00**
3756	**Perpendicular**	**NE**	**$3,000.00**
3754	**Perpendicular**	**NW**	**$3,000.00**
3755	**Curb Ramp Required**	**SW**	**$7,000.00**
408 Lime Ave and **San Bruno Ave**			**$12,500.00**
3769	**Curb Ramp Required**	**N**	**$7,000.00**
3770	**Perpendicular**	**S**	**$2,500.00**
3768	**Perpendicular**	**W**	**$3,000.00**

Total Cost for Street: Loma Linda Ln **$32,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
806 Loma Linda Ln and **Corona Dr**			**$16,000.00**
3446	**Curb Ramp Required**	**NE**	**$7,000.00**
3445	**Perpendicular**	**SE**	**$6,500.00**
3444	**Perpendicular**	**SW**	**$2,500.00**
100 Loma Linda Ln and **Rancho Santa Fe Dr**			**$16,500.00**
3443	**Curb Ramp Required**	**NE**	**$7,000.00**
3442	**Perpendicular**	**SE**	**$6,500.00**
3441	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Los Arcos Ln — $23,250.00

Intersection ID and Street Names:	Type:	Orientation:	
219 Los Arcos Ln and Las Fresas Way			**$13,000.00**
3164	**Perpendicular**	**NE**	**$6,500.00**
3165	**Perpendicular**	**NW**	**$6,500.00**
3166	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
218 Los Arcos Ln and Varbella Pk			**$10,250.00**
3178	**Perpendicular**	**NE**	**$3,250.00**
3179	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Los Cerritos Way — $23,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1568 Los Cerritos Way and Ardilla Dr			**$13,500.00**
3099	**Perpendicular**	**NE**	**$6,500.00**
3100	**Curb Ramp Required**	**SW**	**$7,000.00**
1567 Los Cerritos Way and Oso Dr			**$10,250.00**
3097	**Perpendicular**	**SE**	**$3,250.00**
3098	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Lucia Way — $33,500.00

Intersection ID and Street Names:	Type:	Orientation:	
391 Lucia Way and Asti Way			**$20,000.00**
3899	**Perpendicular**	**NE**	**$6,500.00**
3900	**Perpendicular**	**SE**	**$6,500.00**
3898	**Curb Ramp Required**	**W**	**$7,000.00**
390 Lucia Way and Gabriel Way			**$13,500.00**
3901	**Perpendicular**	**NE**	**$6,500.00**
3902	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Lynmarie Way — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1555 Lynmarie Way and Kimberley Ln			**$13,500.00**
2946	**Perpendicular**	**NE**	**$6,500.00**
2947	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Lynn Way — $42,000.00

Intersection ID and Street Names:	Type:	Orientation:	

937 Lynn Way and **Lucia Way**				**$21,000.00**
	3896	**Curb Ramp Required**	**N**	**$7,000.00**
	3897	**Perpendicular**	**SE**	**$7,000.00**
	3895	**Perpendicular**	**SW**	**$7,000.00**
650 Lynn Way and **Sonora St**				**$21,000.00**
	3891	**Perpendicular**	**NE**	**$7,000.00**
	3890	**Perpendicular**	**SE**	**$7,000.00**
	3889	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Lyons St				**$7,000.00**
Intersection ID and Street Names:		Type:	Orientation:	
1384 Lyons St and **5Th St**				**$7,000.00**
	4193	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	4191	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	4192	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
	4194	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: Macadamia Ave				**$71,750.00**
Intersection ID and Street Names:		Type:	Orientation:	
1557 Macadamia Ave and				**$6,000.00**
	2958	**Perpendicular**	**NW**	**$3,000.00**
	2957	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	2956	**Perpendicular**	**SW**	**$3,000.00**
169 Macadamia Ave and **Alexis Way**				**$13,250.00**
	2961	**Curb Ramp Required**	**NW**	**$7,000.00**
	2959	**Perpendicular**	**SE**	**$3,000.00**
	2960	**Perpendicular**	**SW**	**$3,250.00**
168 Macadamia Ave and **Chestnut Ave**				**$12,500.00**
	2941	**Curb Ramp Required**	**NW**	**$3,500.00**
	2942	**Perpendicular**	**SE**	**$6,500.00**
	2940	**Perpendicular**	**SW**	**$2,500.00**
166 Macadamia Ave and **Lynmarie Way**				**$20,000.00**
	2944	**Curb Ramp Required**	**NW**	**$7,000.00**
	2945	**Perpendicular**	**SE**	**$6,500.00**
	2943	**Perpendicular**	**SW**	**$6,500.00**
167 Macadamia Ave and **Tevin Way**				**$20,000.00**
	2954	**Curb Ramp Required**	**NE**	**$7,000.00**
	2953	**Perpendicular**	**SE**	**$6,500.00**
	2955	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Madera Ave — $49,000.00

Intersection ID and Street Names:	Type:	Orientation:	
868 Madera Ave and 10Th St			**$14,000.00**
4234	**Perpendicular**	**NE**	**$7,000.00**
4233	**Perpendicular**	**SE**	**$7,000.00**
4232	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
834 Madera Ave and De Santi Ave			**$7,000.00**
3575	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3573	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3574	**Curb Ramp Required**	**SW**	**$7,000.00**
1145 Madera Ave and Lewis St			**$28,000.00**
17	**Curb Ramp Required**	**E**	**$7,000.00**
16	**Parallel**	**N**	**$7,000.00**
3580	**Parallel**	**NE**	**$3,500.00**
3581	**Curb Ramp Required**	**NW**	**$7,000.00**
18	**Parallel**	**S**	**$3,500.00**
3579	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Madison Dr — $56,750.00

Intersection ID and Street Names:	Type:	Orientation:	
479 Madison Dr and Hoover Ave			**$20,000.00**
1960	**Perpendicular**	**NE**	**$6,500.00**
1961	**Perpendicular**	**SE**	**$6,500.00**
1959	**Curb Ramp Required**	**W**	**$7,000.00**
480 Madison Dr and Josephine Ct			**$20,000.00**
2039	**Curb Ramp Required**	**E**	**$7,000.00**
2040	**Perpendicular**	**NW**	**$6,500.00**
2041	**Perpendicular**	**SW**	**$6,500.00**
481 Madison Dr and Lacreta Ave			**$16,750.00**
1957	**Curb Ramp Required**	**E**	**$7,000.00**
1956	**Perpendicular**	**NW**	**$3,250.00**
1958	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Madrid Ln — $27,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1506 Madrid Ln and			**$10,250.00**
291	**Curb Ramp Required**	**NE**	**$7,000.00**
290	**Perpendicular**	**SW**	**$3,250.00**
1067 Madrid Ln and Seneca Ave			**$16,750.00**
292	**Curb Ramp Required**	**N**	**$7,000.00**

293	Perpendicular	SE	$3,250.00
294	Perpendicular	SW	$6,500.00

Total Cost for Street: Magnolia St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1402 Magnolia St and 6Th St			**$0.00**
3241	No Sidewalk, Curb Ramp Not Required	E	$0.00
3242	No Sidewalk, Curb Ramp Not Required	N	$0.00
3240	No Sidewalk, Curb Ramp Not Required	S	$0.00
3243	No Sidewalk, Curb Ramp Not Required	W	$0.00
1401 Magnolia St and Cross St			**$0.00**
3237	No Sidewalk, Curb Ramp Not Required	E	$0.00
3238	No Sidewalk, Curb Ramp Not Required	N	$0.00
3236	No Sidewalk, Curb Ramp Not Required	S	$0.00
3239	No Sidewalk, Curb Ramp Not Required	W	$0.00

Total Cost for Street: Mainberry Dr — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
779 Mainberry Dr and Camden Way			**$0.00**
661	No Sidewalk, Curb Ramp Not Required	NE	$0.00
662	No Sidewalk, Curb Ramp Not Required	SE	$0.00
660	No Sidewalk, Curb Ramp Not Required	W	$0.00
450 Mainberry Dr and Howard Rd			**$0.00**
1725	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1728	No Sidewalk, Curb Ramp Not Required	NW	$0.00
1726	No Sidewalk, Curb Ramp Not Required	SE	$0.00
1727	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1152 Mainberry Dr and Lansing St			**$0.00**
1722	No Sidewalk, Curb Ramp Not Required	E	$0.00
1716	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1724	No Sidewalk, Curb Ramp Not Required	NW	$0.00
1717	No Sidewalk, Curb Ramp Not Required	SE	$0.00
1723	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1718	No Sidewalk, Curb Ramp Not Required	W	$0.00
272 Mainberry Dr and Lighthouse Ct			**$21,000.00**
651	Perpendicular	N	$7,000.00
650	Perpendicular	SE	$7,000.00
649	Perpendicular	SW	$7,000.00
1291 Mainberry Dr and National Ave			**$0.00**
663	No Sidewalk, Curb Ramp Not Required	NE	$0.00
665	No Sidewalk, Curb Ramp Not Required	NW	$0.00
664	No Sidewalk, Curb Ramp Not Required	SE	$0.00

666	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1292 Mainberry Dr and **Third St**			**$0.00**
1713	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1712	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1715	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1714	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Majestic Way — $15,000.00

Intersection ID and Street Names:	Type:	Orientation:	
901 Majestic Way and **Gary Ln**			**$15,000.00**
2913	**Perpendicular**	**NE**	**$3,000.00**
2916	**Perpendicular**	**NW**	**$3,000.00**
2914	**Perpendicular**	**SE**	**$2,500.00**
2915	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Makenna Dr — $75,250.00

Intersection ID and Street Names:	Type:	Orientation:	
557 Makenna Dr and **Eagle Way**			**$20,500.00**
1828	**Perpendicular**	**NE**	**$6,500.00**
1827	**Perpendicular**	**SE**	**$7,000.00**
1826	**Curb Ramp Required**	**W**	**$7,000.00**
476 Makenna Dr and **Maple St**			**$20,250.00**
1891	**Perpendicular**	**NE**	**$3,000.00**
1892	**Perpendicular**	**NW**	**$3,250.00**
1894	**Perpendicular**	**SE**	**$7,000.00**
1893	**Perpendicular**	**SW**	**$7,000.00**
556 Makenna Dr and **Oak St**			**$21,000.00**
1835	**Perpendicular**	**NE**	**$7,000.00**
1833	**Perpendicular**	**NW**	**$7,000.00**
1834	**Curb Ramp Required**	**S**	**$7,000.00**
477 Makenna Dr and **Plumas St**			**$13,500.00**
1889	**Curb Ramp Required**	**NW**	**$7,000.00**
1890	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Malta Ave — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
92 Malta Ave and **E Cleveland Ave**			**$21,000.00**
4053	**Parallel**	**NE**	**$7,000.00**
4054	**Parallel**	**NW**	**$7,000.00**
4052	**Curb Ramp Required**	**S**	**$7,000.00**
93 Malta Ave and **Mission Ave**			**$0.00**

2215	No Sidewalk, Curb Ramp Not Required	N	$0.00
2217	No Sidewalk, Curb Ramp Not Required	SE	$0.00
2216	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Mandana Way — $30,000.00

Intersection ID and Street Names:	Type:	Orientation:	
498 Mandana Way and Fairway Ave			**$16,500.00**
2290	Curb Ramp Required	NW	$7,000.00
2288	Perpendicular	SE	$3,000.00
2289	Perpendicular	SW	$6,500.00
499 Mandana Way and Mateo Way			**$13,500.00**
2286	Perpendicular	NE	$6,500.00
2287	Curb Ramp Required	SE	$7,000.00

Total Cost for Street: Mango Ave — $25,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1468 Mango Ave and Lemon Ave			**$16,000.00**
3757	Perpendicular	NW	$2,500.00
3759	Curb Ramp Required	SE	$7,000.00
3758	Perpendicular	SW	$6,500.00
1502 Mango Ave and Raymond Thomas St			**$9,750.00**
3743	Perpendicular	NE	$6,500.00
3744	Perpendicular	SE	$3,250.00
3745	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Manresa Dr — $42,000.00

Intersection ID and Street Names:	Type:	Orientation:	
418 Manresa Dr and Asilomar Dr			**$21,000.00**
1797	Perpendicular	NE	$7,000.00
1798	Perpendicular	SE	$7,000.00
1799	Curb Ramp Required	W	$7,000.00
417 Manresa Dr and Santa Lucia Dr			**$21,000.00**
1779	Curb Ramp Required	E	$7,000.00
1780	Perpendicular	NW	$7,000.00
1781	Perpendicular	SW	$7,000.00

Total Cost for Street: Manzana Ct — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
83 Manzana Ct and Avila Way			**$13,000.00**
3198	Curb Ramp Required	E	$7,000.00

3196	**Perpendicular**	**S**	**$3,000.00**
3197	**Perpendicular**	**W**	**$3,000.00**
82 Manzana Ct and Clinton St			**$13,000.00**
3201	**Perpendicular**	**E**	**$3,000.00**
3199	**Perpendicular**	**S**	**$3,000.00**
3200	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Maple St $42,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1274 Maple St and Cortopassi St			**$0.00**
3556	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3557	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3559	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3558	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1174 Maple St and Cypress St			**$6,500.00**
2745	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2744	**Perpendicular**	**NW**	**$6,500.00**
2746	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1339 Maple St and Grove St			**$0.00**
2755	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2754	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2753	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
833 Maple St and Madera Ave			**$10,000.00**
3585	**Curb Ramp Required**	**NW**	**$7,000.00**
3587	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3586	**Perpendicular**	**SW**	**$3,000.00**
94 Maple St and Maple Ct			**$0.00**
383	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
384	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
385	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
725 Maple St and Monterey St			**$0.00**
365	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
366	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
364	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
367	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1541 Maple St and Noble St			**$0.00**
2751	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2752	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2750	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1219 Maple St and Pine St			**$9,500.00**
2741	**Perpendicular**	**NE**	**$6,500.00**
2742	**Perpendicular**	**SE**	**$3,000.00**
2743	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

1348 Maple St and Santa Clara			**$3,500.00**
381	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
382	**Parallel**	**NW**	**$3,500.00**
380	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
379	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1349 Maple St and Santa Cruz St			**$0.00**
376	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
377	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
375	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
378	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1306 Maple St and Stadium Rd			**$13,000.00**
388	**Parallel**	**NE**	**$3,000.00**
387	**Parallel**	**NW**	**$3,500.00**
389	**Perpendicular**	**SE**	**$3,000.00**
386	**Parallel**	**SW**	**$3,500.00**

Total Cost for Street: Marie Dr **$28,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
508 Marie Dr and Glade Ave			**$16,500.00**
2405	**Perpendicular**	**NE**	**$6,500.00**
2406	**Perpendicular**	**NW**	**$3,000.00**
2404	**Curb Ramp Required**	**SE**	**$7,000.00**
507 Marie Dr and Taylor Lane			**$12,000.00**
2401	**Perpendicular**	**NE**	**$2,500.00**
2402	**Curb Ramp Required**	**NW**	**$7,000.00**
2403	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Marina Dr **$20,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
638 Marina Dr and Asilomar Dr			**$20,500.00**
1803	**Perpendicular**	**NE**	**$6,500.00**
1804	**Perpendicular**	**SE**	**$7,000.00**
1805	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Mariposa St **$42,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
132 Mariposa St and A St			**$6,500.00**
3404	**Parallel**	**NE**	**$0.00**
3402	**Perpendicular**	**SE**	**$6,500.00**
3403	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
133 Mariposa St and Dome Ave			**$13,000.00**

3400	**Perpendicular**	**NE**	**$3,000.00**
3401	**Curb Ramp Required**	**NW**	**$7,000.00**
3399	**Perpendicular**	**SE**	**$3,000.00**
588 Mariposa St and Olive Ave			**$13,250.00**
3379	**Perpendicular**	**NE**	**$3,000.00**
3380	**Perpendicular**	**NW**	**$3,250.00**
3381	**Curb Ramp Required**	**SW**	**$7,000.00**
1585 Mariposa St and Oso Dr			**$10,000.00**
3440	**Curb Ramp Required**	**NE**	**$7,000.00**
3439	**Perpendicular**	**NW**	**$3,000.00**

Total Cost for Street: Martin St — $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1429 Martin St and Lewis St			**$13,000.00**
3547	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3546	**Perpendicular**	**NNW**	**$6,500.00**
3548	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3549	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
3545	**Perpendicular**	**WNW**	**$6,500.00**

Total Cost for Street: Merced St — $90,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1462 Merced St and Adell St			**$13,000.00**
2148	**Curb Ramp Required**	**E**	**$7,000.00**
2150	**Perpendicular**	**NW**	**$3,000.00**
2149	**Perpendicular**	**SW**	**$3,000.00**
270 Merced St and Daulton Ave			**$0.00**
4081	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4080	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4082	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4083	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
267 Merced St and E Cleveland Ave			**$42,000.00**
4188	**Curb Ramp Required**	**N**	**$7,000.00**
4184	**Parallel**	**NE**	**$7,000.00**
4182	**Parallel**	**NW**	**$7,000.00**
4183	**Curb Ramp Required**	**S**	**$7,000.00**
4190	**Parallel**	**SE**	**$7,000.00**
4189	**Parallel**	**SW**	**$7,000.00**
269 Merced St and E Lincoln Ave			**$14,000.00**
4102	**Perpendicular**	**NE**	**$7,000.00**
4100	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4103	**Perpendicular**	**SE**	**$7,000.00**

4101	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
268 Merced St and **E Riverside Dr**			**$14,000.00**
4086	**Perpendicular**	**NE**	**$6,500.00**
4084	**Perpendicular**	**NW**	**$500.00**
4085	**Curb Ramp Required**	**S**	**$7,000.00**
957 Merced St and **Grant Ave**			**$0.00**
4125	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
4124	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4122	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
4123	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
443 Merced St and **W Sherwood Way**			**$7,000.00**
2254	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
2255	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2256	**Combination**	**SW**	**$7,000.00**

Total Cost for Street: Merlot Ave $108,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1223 Merlot Ave and **Barbera Ave**			**$20,000.00**
2559	**Perpendicular**	**NE**	**$6,500.00**
2558	**Perpendicular**	**NW**	**$6,500.00**
2560	**Curb Ramp Required**	**SE**	**$7,000.00**
1224 Merlot Ave and **Chablis Ave**			**$20,000.00**
2557	**Perpendicular**	**NE**	**$6,500.00**
2556	**Perpendicular**	**NW**	**$6,500.00**
2555	**Curb Ramp Required**	**SW**	**$7,000.00**
1107 Merlot Ave and **Granada Dr**			**$13,000.00**
1922	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1921	**Perpendicular**	**NW**	**$6,500.00**
1923	**Perpendicular**	**SW**	**$6,500.00**
225 Merlot Ave and **S Timberline Dr**			**$26,000.00**
2610	**Perpendicular**	**NE**	**$6,500.00**
2607	**Perpendicular**	**NW**	**$6,500.00**
2609	**Perpendicular**	**SE**	**$6,500.00**
2608	**Perpendicular**	**SW**	**$6,500.00**
224 Merlot Ave and **S Wolftrap St**			**$16,750.00**
2612	**Curb Ramp Required**	**NE**	**$7,000.00**
2611	**Perpendicular**	**NW**	**$6,500.00**
2613	**Perpendicular**	**SW**	**$3,250.00**
226 Merlot Ave and **Westberry Bvd**			**$13,000.00**
2577	**Perpendicular**	**NE**	**$6,500.00**
2578	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2576	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Michoacan Ct — $40,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1461 Michoacan Ct and Jericho Dr			**$40,000.00**
2042	**Curb Ramp Required**	**N**	**$7,000.00**
2047	**Perpendicular**	**NE**	**$6,500.00**
2046	**Perpendicular**	**NW**	**$6,500.00**
2045	**Curb Ramp Required**	**S**	**$7,000.00**
2044	**Perpendicular**	**SE**	**$6,500.00**
2043	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Milano Lane — $44,000.00

Intersection ID and Street Names:	Type:	Orientation:	
77 Milano Lane and Lucca Court			**$7,000.00**
265	**Perpendicular**	**NE**	**$0.00**
266	**Perpendicular**	**NW**	**$0.00**
264	**Curb Ramp Required**	**S**	**$7,000.00**
201 Milano Lane and Monterey St			**$8,000.00**
251	**Curb Ramp Required**	**E**	**$7,000.00**
252	**Perpendicular**	**NW**	**$500.00**
253	**Perpendicular**	**SW**	**$500.00**
79 Milano Lane and Napoli St			**$7,000.00**
268	**Perpendicular**	**NE**	**$0.00**
269	**Perpendicular**	**NW**	**$0.00**
267	**Curb Ramp Required**	**S**	**$7,000.00**
78 Milano Lane and Pompei St			**$9,250.00**
257	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
256	**Perpendicular**	**NE**	**$3,000.00**
259	**Perpendicular**	**NW**	**$0.00**
255	**Perpendicular**	**SE**	**$3,000.00**
258	**Perpendicular**	**SW**	**$3,250.00**
254	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
81 Milano Lane and Roma Court			**$9,500.00**
260	**Perpendicular**	**NE**	**$3,000.00**
263	**Perpendicular**	**NW**	**$3,250.00**
261	**Perpendicular**	**SE**	**$0.00**
262	**Perpendicular**	**SW**	**$3,250.00**
80 Milano Lane and Stadium Rd			**$3,250.00**
271	**Perpendicular**	**NE**	**$3,250.00**
272	**Perpendicular**	**SE**	**$0.00**
270	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Milow St — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1575 Milow St and Fritz St			**$13,500.00**
3157	**Perpendicular**	**NW**	**$6,500.00**
3158	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Mission Ave — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
599 Mission Ave and Kadota Ave			**$0.00**
2209	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
2211	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2210	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Monarch Rd — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
195 Monarch Rd and Dome Ave			**$16,500.00**
3397	**Curb Ramp Required**	**NE**	**$7,000.00**
3396	**Perpendicular**	**SE**	**$3,000.00**
3398	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Monroe Ave — $70,000.00

Intersection ID and Street Names:	Type:	Orientation:	
75 Monroe Ave and Eisenhower Ln			**$16,750.00**
2034	**Curb Ramp Required**	**N**	**$7,000.00**
2035	**Perpendicular**	**SE**	**$6,500.00**
2036	**Perpendicular**	**SW**	**$3,250.00**
76 Monroe Ave and Hoover Ave			**$16,750.00**
1962	**Curb Ramp Required**	**N**	**$7,000.00**
1964	**Perpendicular**	**SE**	**$6,500.00**
1963	**Perpendicular**	**SW**	**$3,250.00**
73 Monroe Ave and Pierce Ln			**$20,000.00**
1935	**Perpendicular**	**NE**	**$6,500.00**
1934	**Perpendicular**	**NW**	**$6,500.00**
1933	**Curb Ramp Required**	**S**	**$7,000.00**
74 Monroe Ave and Tyler Ln			**$16,500.00**
1991	**Perpendicular**	**NE**	**$6,500.00**
1992	**Perpendicular**	**NW**	**$3,000.00**
1990	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Monterey Dr — $65,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1047 Monterey Dr and Almond Ave			**$23,000.00**
340	**Parallel**	**NE**	**$3,500.00**
341	**Perpendicular**	**NW**	**$6,500.00**
339	**Perpendicular**	**SE**	**$6,500.00**
338	**Perpendicular**	**SW**	**$6,500.00**
326 Monterey Dr and Madrid Ln			**$16,500.00**
299	**Perpendicular**	**NE**	**$6,500.00**
300	**Perpendicular**	**SE**	**$3,000.00**
298	**Curb Ramp Required**	**W**	**$7,000.00**
327 Monterey Dr and St Montelena Ct			**$26,000.00**
216	**Perpendicular**	**NE**	**$6,500.00**
217	**Perpendicular**	**NW**	**$6,500.00**
215	**Perpendicular**	**SE**	**$6,500.00**
214	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Monterey St — $35,000.00

Intersection ID and Street Names:	Type:	Orientation:	
325 Monterey St and Gary Ln			**$22,000.00**
301	**Perpendicular**	**NE**	**$6,500.00**
302	**Perpendicular**	**NW**	**$6,500.00**
304	**Perpendicular**	**SE**	**$6,500.00**
303	**Perpendicular**	**SW**	**$2,500.00**
1215 Monterey St and Lewis St			**$6,500.00**
3542	**Perpendicular**	**NE**	**$3,250.00**
3543	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3544	**Perpendicular**	**SE**	**$3,250.00**
959 Monterey St and Walnut St			**$6,500.00**
361	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
362	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
360	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
363	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Moore Ave — $28,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1090 Moore Ave and S Lake St			**$28,000.00**
4295	**Perpendicular**	**E**	**$7,000.00**
4296	**Perpendicular**	**N**	**$7,000.00**
4297	**Perpendicular**	**S**	**$7,000.00**

	4298	**Perpendicular**	**W**	**$7,000.00**
1089 Moore Ave and **Vineyard Ave**				**$0.00**
	3375	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	3374	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
	3373	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Munras Ave **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
640 Munras Ave and **San Marco Ave**			**$20,000.00**
2841	**Curb Ramp Required**	**NE**	**$7,000.00**
2840	**Perpendicular**	**NW**	**$6,500.00**
2842	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: N A St **$27,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1431 N A St and **5Th St**			**$27,000.00**
4211	**Perpendicular**	**E**	**$6,500.00**
4210	**Perpendicular**	**N**	**$7,000.00**
4212	**Perpendicular**	**S**	**$6,500.00**
4498	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: N B St **$33,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1276 N B St and **3Rd St**			**$14,000.00**
4368	**Perpendicular**	**E**	**$7,000.00**
4369	**Perpendicular**	**N**	**$0.00**
4371	**Perpendicular**	**S**	**$7,000.00**
4370	**Perpendicular**	**W**	**$0.00**
1277 N B St and **St 4Th**			**$19,250.00**
4374	**Perpendicular**	**E**	**$6,500.00**
4373	**Perpendicular**	**N**	**$3,250.00**
4375	**Perpendicular**	**S**	**$3,000.00**
4372	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: N C St **$27,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1443 N C St and **3Rd St**			**$27,000.00**
3852	**Perpendicular**	**E**	**$6,500.00**
3851	**Perpendicular**	**N**	**$6,500.00**
3853	**Combination**	**S**	**$7,000.00**

3850	**Combination**	**W**	**$7,000.00**

Total Cost for Street: N D St — $116,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1381 N D St and 1St St			**$17,000.00**
3833	**Parallel**	**N**	**$3,000.00**
3832	**Curb Ramp Required**	**S**	**$7,000.00**
3831	**Perpendicular**	**W**	**$7,000.00**
317 N D St and 3Rd St			**$27,500.00**
1066	**Perpendicular**	**E**	**$7,000.00**
1067	**Perpendicular**	**N**	**$6,500.00**
1065	**Perpendicular**	**S**	**$7,000.00**
1068	**Perpendicular**	**W**	**$7,000.00**
1330 N D St and 5Th St			**$27,000.00**
4474	**Perpendicular**	**E**	**$7,000.00**
4473	**Perpendicular**	**N**	**$6,500.00**
4475	**Perpendicular**	**S**	**$6,500.00**
4476	**Combination**	**W**	**$7,000.00**
661 N D St and E Lincoln Ave			**$12,250.00**
1310	**Perpendicular**	**NE**	**$3,000.00**
1309	**Perpendicular**	**NW**	**$3,000.00**
1307	**Perpendicular**	**SE**	**$3,000.00**
1308	**Perpendicular**	**SW**	**$3,250.00**
502 N D St and E S St			**$13,000.00**
1305	**Perpendicular**	**NE**	**$3,000.00**
1304	**Perpendicular**	**NW**	**$6,500.00**
1306	**Perpendicular**	**SE**	**$3,000.00**
1303	**Perpendicular**	**SW**	**$500.00**
662 N D St and Riverside Dr			**$19,250.00**
1299	**Perpendicular**	**NE**	**$3,250.00**
1302	**Perpendicular**	**NW**	**$3,000.00**
1300	**Perpendicular**	**SE**	**$6,500.00**
1301	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: N E St — $34,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1390 N E St and 3Rd St			**$13,500.00**
1064	**Perpendicular**	**E**	**$6,500.00**
1061	**Perpendicular**	**N**	**$0.00**
1063	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1062	**Curb Ramp Required**	**W**	**$7,000.00**
917 N E St and 5Th St			**$20,500.00**

4479	Perpendicular	E	$6,500.00
4477	Perpendicular	N	$7,000.00
4478	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: N G St — $44,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1207 N G St and Fifth St			**$20,000.00**
1092	Perpendicular	E	$6,500.00
1091	Perpendicular	N	$6,500.00
1093	Combination	S	$0.00
1094	Combination	W	$7,000.00
1290 N G St and W 4Th St			**$24,000.00**
1082	Perpendicular	E	$7,000.00
1081	Perpendicular	N	$7,000.00
1083	Perpendicular	S	$3,000.00
1084	Perpendicular	W	$7,000.00

Total Cost for Street: N Gateway Dr — $92,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1201 N Gateway Dr and Fifth St			**$13,000.00**
1099	No Sidewalk, Curb Ramp Not Required	NE	$0.00
1101	Perpendicular	S	$6,500.00
1100	Perpendicular	W	$6,500.00
1078 N Gateway Dr and W 1St St			**$20,500.00**
1042	Curb Ramp Required	NE	$7,000.00
1043	Perpendicular	S	$6,500.00
1044	Perpendicular	W	$7,000.00
730 N Gateway Dr and W 2Nd St			**$16,000.00**
1039	Parallel	NE	$3,000.00
1040	Perpendicular	S	$6,500.00
1041	Perpendicular	W	$6,500.00
1280 N Gateway Dr and W 3Rd St			**$22,750.00**
1090	Perpendicular	E	$6,500.00
1089	Perpendicular	N	$6,500.00
1087	Perpendicular	S	$3,250.00
1088	Perpendicular	W	$6,500.00
1255 N Gateway Dr and W Roberts Ave			**$20,500.00**
1045	Curb Ramp Required	NE	$7,000.00
1046	Perpendicular	S	$6,500.00
1047	Perpendicular	W	$7,000.00

Total Cost for Street: N Granada Dr — $175,250.00

Intersection ID and Street Names:		Type:	Orientation:	
1483	**N Granada Dr** and **Ave 16**			**$21,000.00**
	3803	**Curb Ramp Required**	**N**	**$7,000.00**
	3804	**Perpendicular**	**SE**	**$7,000.00**
	3805	**Perpendicular**	**SW**	**$7,000.00**
874	**N Granada Dr** and **Balsam Ct**			**$10,250.00**
	1610	**Driveway**	**E**	**$0.00**
	1609	**Perpendicular**	**NW**	**$3,250.00**
	1611	**Perpendicular**	**SW**	**$7,000.00**
460	**N Granada Dr** and **Deborah Ln**			**$20,000.00**
	2389	**Perpendicular**	**NW**	**$6,500.00**
	2387	**Curb Ramp Required**	**SE**	**$7,000.00**
	2388	**Perpendicular**	**SW**	**$6,500.00**
867	**N Granada Dr** and **Greenwood Dr**			**$20,000.00**
	1567	**Curb Ramp Required**	**E**	**$7,000.00**
	1568	**Perpendicular**	**NW**	**$6,500.00**
	1566	**Perpendicular**	**SW**	**$6,500.00**
861	**N Granada Dr** and **Monocott Dr**			**$20,500.00**
	1562	**Curb Ramp Required**	**E**	**$7,000.00**
	1560	**Perpendicular**	**NW**	**$7,000.00**
	1561	**Perpendicular**	**SW**	**$6,500.00**
459	**N Granada Dr** and **Pamela Dr**			**$16,000.00**
	2383	**Perpendicular**	**NW**	**$6,500.00**
	2381	**Perpendicular**	**SE**	**$3,000.00**
	2382	**Perpendicular**	**SW**	**$6,500.00**
860	**N Granada Dr** and **Sandlewood Dr**			**$20,500.00**
	1564	**Curb Ramp Required**	**E**	**$7,000.00**
	1565	**Perpendicular**	**NW**	**$7,000.00**
	1563	**Perpendicular**	**SW**	**$6,500.00**
461	**N Granada Dr** and **Steeple Gate**			**$20,000.00**
	2385	**Perpendicular**	**NE**	**$6,500.00**
	2386	**Curb Ramp Required**	**NW**	**$7,000.00**
	2384	**Perpendicular**	**SE**	**$6,500.00**
772	**N Granada Dr** and **Valley Way**			**$27,000.00**
	1605	**Perpendicular**	**NE**	**$7,000.00**
	1607	**Perpendicular**	**NW**	**$6,500.00**
	1608	**Perpendicular**	**SE**	**$7,000.00**
	1606	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: N I St — $123,750.00

Intersection ID and Street Names:	Type:	Orientation:	
399 N I St and 406 N I St			**$14,000.00**
997	**Curb Ramp Required**	**N**	**$7,000.00**
996	**Curb Ramp Required**	**S**	**$7,000.00**
1321 N I St and Fifth St			**$24,250.00**
171	**Perpendicular**	**E**	**$7,000.00**
170	**Perpendicular**	**N**	**$7,000.00**
172	**Perpendicular**	**S**	**$7,000.00**
169	**Perpendicular**	**W**	**$3,250.00**
1119 N I St and W 2Nd St			**$34,000.00**
995	**Perpendicular**	**E**	**$3,000.00**
993	**Perpendicular**	**N**	**$7,000.00**
994	**Island-Cut Through**	**NE**	**$10,000.00**
991	**Parallel**	**S**	**$7,000.00**
992	**Parallel**	**W**	**$7,000.00**
1322 N I St and W 4Th St			**$27,500.00**
1001	**Perpendicular**	**E**	**$7,000.00**
998	**Perpendicular**	**N**	**$7,000.00**
999	**Perpendicular**	**S**	**$6,500.00**
1000	**Perpendicular**	**W**	**$7,000.00**
495 N I St and W Roberts Ave			**$24,000.00**
905	**Perpendicular**	**NW**	**$6,500.00**
908	**Parallel**	**SE**	**$7,000.00**
907	**Perpendicular**	**SSW**	**$7,000.00**
906	**Parallel**	**WSW**	**$3,500.00**

Total Cost for Street: N K St — $38,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1289 N K St and Fifth St			**$27,500.00**
176	**Perpendicular**	**E**	**$7,000.00**
177	**Perpendicular**	**N**	**$7,000.00**
179	**Perpendicular**	**S**	**$6,500.00**
178	**Perpendicular**	**W**	**$7,000.00**
1288 N K St and W Yosemite Ave			**$10,500.00**
98	**Combination**	**NE**	**$3,500.00**
99	**Combination**	**NW**	**$3,500.00**
97	**Combination**	**SE**	**$0.00**
96	**Combination**	**SW**	**$3,500.00**

Total Cost for Street: N L St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
202 N L St and Third St			**$0.00**
977	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
978	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: N Lake St — $211,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1 N Lake St and Ashlan Way			**$18,000.00**
4006	**Combination**	**E**	**$0.00**
4008	**Parallel**	**NE**	**$3,500.00**
4007	**Perpendicular**	**NW**	**$7,000.00**
4004	**Parallel**	**SE**	**$500.00**
4005	**Perpendicular**	**SW**	**$7,000.00**
4003	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
606 N Lake St and Daulton Ave			**$21,000.00**
4075	**Perpendicular**	**NE**	**$7,000.00**
4074	**Perpendicular**	**SE**	**$7,000.00**
4073	**Curb Ramp Required**	**W**	**$7,000.00**
7 N Lake St and E Adell St			**$12,500.00**
2139	**Perpendicular**	**NE**	**$0.00**
2140	**Perpendicular**	**NNW**	**$6,500.00**
2141	**Perpendicular**	**NW**	**$3,000.00**
2144	**Perpendicular**	**SE**	**$3,000.00**
2143	**Perpendicular**	**SSE**	**$0.00**
2142	**Perpendicular**	**SW**	**$0.00**
11 N Lake St and E Clark St			**$23,500.00**
4444	**Curb Ramp Required**	**E**	**$7,000.00**
4011	**Perpendicular**	**NE**	**$7,000.00**
4009	**Perpendicular**	**SE**	**$2,500.00**
4443	**Driveway**	**W**	**$7,000.00**
10 N Lake St and E Kennedy St			**$16,500.00**
2146	**Perpendicular**	**NE**	**$6,500.00**
2147	**Perpendicular**	**SE**	**$3,000.00**
2145	**Curb Ramp Required**	**W**	**$7,000.00**
605 N Lake St and E Lincoln Ave			**$28,000.00**
4139	**Perpendicular**	**NE**	**$7,000.00**
4142	**Perpendicular**	**NW**	**$7,000.00**
4140	**Perpendicular**	**SE**	**$7,000.00**
4141	**Perpendicular**	**SW**	**$7,000.00**
604 N Lake St and E Riverside Dr			**$14,000.00**

4064	**Perpendicular**	**NE**	**$7,000.00**
4065	**Perpendicular**	**SE**	**$0.00**
4066	**Curb Ramp Required**	**W**	**$7,000.00**
9 N Lake St and **Green Way**			**$30,500.00**
4022	**Curb Ramp Required**	**E**	**$7,000.00**
4171	**Parallel**	**NE**	**$3,500.00**
4020	**Perpendicular**	**NW**	**$6,500.00**
4170	**Parallel**	**SE**	**$3,500.00**
4021	**Perpendicular**	**SW**	**$3,000.00**
4169	**Curb Ramp Required**	**W**	**$7,000.00**
3 N Lake St and **James Way**			**$8,000.00**
4000	**Curb Ramp Required**	**E**	**$7,000.00**
4002	**Perpendicular**	**NW**	**$500.00**
4001	**Perpendicular**	**SW**	**$500.00**
603 N Lake St and **Rush St**			**$21,000.00**
4133	**Curb Ramp Required**	**E**	**$7,000.00**
4134	**Perpendicular**	**NW**	**$7,000.00**
4135	**Perpendicular**	**SW**	**$7,000.00**
6 N Lake St and **W Sherwood Way**			**$11,000.00**
4016	**Parallel**	**NE**	**$500.00**
4019	**Perpendicular**	**NW**	**$7,000.00**
4017	**Parallel**	**SE**	**$500.00**
4018	**Perpendicular**	**SW**	**$3,000.00**
707 N Lake St and **Wessmith Way**			**$7,500.00**
4012	**Parallel**	**NE**	**$500.00**
4015	**Perpendicular**	**NW**	**$3,000.00**
4013	**Parallel**	**SE**	**$3,500.00**
4014	**Perpendicular**	**SW**	**$500.00**

Total Cost for Street: N M St — $3,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1151 N M St and **Third St**			**$3,250.00**
975	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
976	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: N N St — $42,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1452 N N St and **Fourth St**			**$28,000.00**
196	**Perpendicular**	**E**	**$7,000.00**
195	**Perpendicular**	**N**	**$7,000.00**
193	**Perpendicular**	**S**	**$7,000.00**
194	**Perpendicular**	**W**	**$7,000.00**

720 N N St and Sunset Ave				**$7,000.00**
	918	**Perpendicular**	**SE**	**$7,000.00**
	917	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1269 N N St and Third St				**$7,000.00**
	974	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	973	**Curb Ramp Required**	**N**	**$7,000.00**
	971	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
	972	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: N O St — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1423 N O St and Fourth St			**$7,000.00**
608	**Perpendicular**	**E**	**$500.00**
605	**Combination**	**N**	**$3,500.00**
607	**Perpendicular**	**S**	**$0.00**
606	**Perpendicular**	**W**	**$3,000.00**
819 N O St and Pine St			**$0.00**
429	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
428	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
427	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
820 N O St and Third St			**$0.00**
912	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
911	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
909	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
910	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: N P St — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1407 N P St and Fifth St			**$3,000.00**
615	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
614	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
616	**Perpendicular**	**S**	**$3,000.00**
613	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1406 N P St and W Yosemite Ave			**$13,500.00**
70	**Combination**	**E**	**$7,000.00**
71	**Perpendicular**	**N**	**$6,500.00**
69	**Combination**	**S**	**$0.00**
72	**Combination**	**W**	**$0.00**

Total Cost for Street: N Park Dr — $0.00

Intersection ID and Street Names:	Type:	Orientation:

1137	**N Park Dr** and **Redwood Dr**			**$0.00**
	956	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	958	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	957	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: N Q St — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1332	**N Q St** and **Fifth St**		**$13,500.00**
611	**Perpendicular**	**E**	**$7,000.00**
609	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
612	**Perpendicular**	**S**	**$6,500.00**
610	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
872	**N Q St** and **Fourth St**		**$7,000.00**
507	**Parallel**	**ESE**	**$3,000.00**
508	**Island-Cut Through**	**NE**	**$500.00**
509	**Perpendicular**	**NNE**	**$0.00**
505	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
506	**Parallel**	**SE**	**$3,500.00**
504	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: N Schnoor Ave — $182,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1537	**N Schnoor Ave** and **2000 N Schnoor Ave**		**$13,000.00**
2432	**Perpendicular**	**NW**	**$6,500.00**
2433	**Perpendicular**	**SW**	**$6,500.00**
1217	**N Schnoor Ave** and **Beechwood Way**		**$16,750.00**
2438	**Perpendicular**	**NW**	**$3,250.00**
2440	**Curb Ramp Required**	**SE**	**$7,000.00**
2439	**Perpendicular**	**SW**	**$6,500.00**
711	**N Schnoor Ave** and **Evergreen Pl**		**$0.00**
713	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
711	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
712	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
716	**N Schnoor Ave** and **Fillmore Ave**		**$20,000.00**
716	**Perpendicular**	**NE**	**$6,500.00**
714	**Perpendicular**	**SE**	**$6,500.00**
715	**Curb Ramp Required**	**W**	**$7,000.00**
1000	**N Schnoor Ave** and **Foxglove Way**		**$22,500.00**
2430	**Perpendicular**	**NE**	**$6,500.00**
2429	**Perpendicular**	**NW**	**$3,000.00**
2431	**Perpendicular**	**SE**	**$6,500.00**
2428	**Perpendicular**	**SW**	**$6,500.00**

1129 N Schnoor Ave and **Ironwood Way**				**$13,000.00**
	2434	**Perpendicular**	**NW**	**$6,500.00**
	2435	**Perpendicular**	**SW**	**$6,500.00**
1263 N Schnoor Ave and **Jefferson Ave**				**$26,500.00**
	720	**Perpendicular**	**NE**	**$6,500.00**
	719	**Perpendicular**	**NW**	**$6,500.00**
	717	**Perpendicular**	**SE**	**$6,500.00**
	718	**Perpendicular**	**SW**	**$7,000.00**
1001 N Schnoor Ave and **Kennedy St**				**$20,500.00**
	3940	**Perpendicular**	**NE**	**$7,000.00**
	3942	**Perpendicular**	**NW**	**$7,000.00**
	3941	**Perpendicular**	**SE**	**$6,500.00**
	3943	**Perpendicular**	**SW**	**$0.00**
883 N Schnoor Ave and **Riverview Dr**				**$14,000.00**
	723	**Perpendicular**	**NE**	**$7,000.00**
	722	**Perpendicular**	**SE**	**$7,000.00**
	721	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
882 N Schnoor Ave and **Trevor Way**				**$9,750.00**
	2516	**Perpendicular**	**NW**	**$3,250.00**
	2517	**Perpendicular**	**SW**	**$6,500.00**
710 N Schnoor Ave and **University Ave**				**$26,000.00**
	709	**Perpendicular**	**NE**	**$6,500.00**
	708	**Perpendicular**	**NW**	**$6,500.00**
	710	**Perpendicular**	**SE**	**$6,500.00**
	707	**Perpendicular**	**SW**	**$6,500.00**
1239 N Schnoor Ave and **Westwood Pl**				**$0.00**
	788	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	789	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	787	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: N Westberry Blv **$63,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
402 N Westberry Blv and **Common Way**			**$22,500.00**
2308	**Perpendicular**	**NE**	**$3,000.00**
2307	**Perpendicular**	**NW**	**$6,500.00**
2305	**Perpendicular**	**SE**	**$6,500.00**
2306	**Perpendicular**	**SW**	**$6,500.00**
401 N Westberry Blv and **Fairfield Way**			**$22,000.00**
2357	**Perpendicular**	**NE**	**$2,500.00**
2356	**Perpendicular**	**NW**	**$6,500.00**
2354	**Perpendicular**	**SE**	**$6,500.00**
2355	**Perpendicular**	**SW**	**$6,500.00**

400 N Westberry Blv and Fairway Ave				**$19,250.00**
	2300	**Perpendicular**	**NE**	**$3,000.00**
	2299	**Perpendicular**	**NW**	**$3,250.00**
	2297	**Perpendicular**	**SE**	**$6,500.00**
	2298	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: National Ave **$49,750.00**

Intersection ID and Street Names:		Type:	Orientation:	
1165 National Ave and Accornero Ave				**$16,750.00**
	807	**Perpendicular**	**NE**	**$3,250.00**
	806	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	808	**Perpendicular**	**S**	**$13,500.00**
1270 National Ave and Fairview Ave				**$0.00**
	434	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	435	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	437	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	436	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1243 National Ave and Krest St				**$0.00**
	559	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	560	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	561	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1271 National Ave and Rotan Ave				**$0.00**
	430	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	431	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	433	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	432	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1052 National Ave and S Camden Way				**$0.00**
	565	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	669	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	667	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	670	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	668	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1235 National Ave and Schnoor Ave				**$12,500.00**
	552	**Parallel**	**NE**	**$3,500.00**
	555	**Perpendicular**	**NW**	**$3,000.00**
	553	**Perpendicular**	**SE**	**$3,000.00**
	554	**Perpendicular**	**SW**	**$3,000.00**
1238 National Ave and Sunnydale St				**$20,500.00**
	1662	**Perpendicular**	**NE**	**$7,000.00**
	1661	**Perpendicular**	**NW**	**$6,500.00**
	1660	**Curb Ramp Required**	**S**	**$7,000.00**
1234 National Ave and Williams Ave				**$0.00**
	442	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**

443	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
444	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
445	**Perpendicular**	**SW**	**$0.00**

Total Cost for Street: Navel Ave **$23,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1561 Navel Ave and **Lemon Ave**			**$10,250.00**
2987	**Perpendicular**	**NW**	**$3,250.00**
2988	**Curb Ramp Required**	**SE**	**$7,000.00**
1562 Navel Ave and **Tangerine Ave**			**$13,500.00**
2994	**Curb Ramp Required**	**NE**	**$7,000.00**
2993	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Nebraska Ave **$50,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
388 Nebraska Ave and **E Cleveland Ave**			**$24,000.00**
4150	**Parallel**	**NE**	**$7,000.00**
4149	**Parallel**	**NW**	**$3,000.00**
4147	**Parallel**	**SE**	**$7,000.00**
4148	**Parallel**	**SW**	**$7,000.00**
1369 Nebraska Ave and **Rush St**			**$0.00**
1318	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1319	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1317	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1320	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1048 Nebraska Ave and **W Sherwood Way**			**$26,000.00**
1363	**Perpendicular**	**NE**	**$6,500.00**
1362	**Perpendicular**	**NW**	**$6,500.00**
1360	**Perpendicular**	**SE**	**$6,500.00**
1361	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Nebraska St **$13,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
389 Nebraska St and **W South St**			**$13,500.00**
1293	**Perpendicular**	**NE**	**$6,500.00**
1294	**Parallel**	**SE**	**$3,500.00**
1295	**Parallel**	**SW**	**$3,500.00**

Total Cost for Street: Neplus Way **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:

682 Neplus Way and Drake St			**$20,000.00**
3110	**Perpendicular**	**NE**	**$6,500.00**
3108	**Perpendicular**	**SE**	**$6,500.00**
3109	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Nicola Way **$29,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1139 Nicola Way and Noreen Way			**$16,000.00**
3926	**Curb Ramp Required**	**N**	**$7,000.00**
3928	**Perpendicular**	**SE**	**$6,500.00**
3927	**Perpendicular**	**SW**	**$2,500.00**
429 Nicola Way and W Sherwood Way			**$13,000.00**
1335	**Perpendicular**	**NE**	**$3,000.00**
1334	**Perpendicular**	**NW**	**$3,000.00**
1333	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Ninth St **$21,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
1232 Ninth St and S K St			**$21,000.00**
132	**Combination**	**E**	**$7,000.00**
131	**Combination**	**N**	**$7,000.00**
133	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Noreen Way **$41,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
802 Noreen Way and Ashlan Way			**$20,500.00**
3986	**Curb Ramp Required**	**E**	**$7,000.00**
3987	**Perpendicular**	**NW**	**$7,000.00**
3985	**Perpendicular**	**SW**	**$6,500.00**
801 Noreen Way and Asti Way			**$20,500.00**
3999	**Perpendicular**	**NE**	**$7,000.00**
3998	**Perpendicular**	**SE**	**$6,500.00**
3997	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Oak St **$6,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1320 Oak St and Grove St			**$0.00**
2758	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2757	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2756	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

1439 Oak St and **Park St**				**$6,500.00**
	2759	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	2762	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	2760	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	2761	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Oakridge Dr — $27,000.00

Intersection ID and Street Names:		Type:	Orientation:	
613 Oakridge Dr and **Deerwood Ct**				**$20,000.00**
	405	**Curb Ramp Required**	**N**	**$7,000.00**
	406	**Perpendicular**	**SE**	**$6,500.00**
	407	**Perpendicular**	**SW**	**$6,500.00**
1512 Oakridge Dr and **Deerwood Dr**				**$7,000.00**
	404	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Olive Ave — $285,000.00

Intersection ID and Street Names:		Type:	Orientation:	
732 Olive Ave and				**$20,500.00**
	10	**Perpendicular**	**NE**	**$7,000.00**
	8	**Perpendicular**	**NW**	**$6,500.00**
	9	**Curb Ramp Required**	**SW**	**$7,000.00**
1251 Olive Ave and **Don Miguel St**				**$11,000.00**
	3043	**Island-Cut Through**	**N**	**$10,000.00**
	3042	**Perpendicular**	**NE**	**$500.00**
	3044	**Perpendicular**	**NW**	**$500.00**
	3041	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
778 Olive Ave and **Grove St**				**$6,500.00**
	44	**Perpendicular**	**SE**	**$3,250.00**
	43	**Perpendicular**	**SW**	**$3,250.00**
1540 Olive Ave and **Howard Rd**				**$16,500.00**
	2732	**Curb Ramp Required**	**NE**	**$7,000.00**
	2731	**Perpendicular**	**SE**	**$3,000.00**
	2730	**Perpendicular**	**SW**	**$6,500.00**
832 Olive Ave and **Martin St**				**$13,750.00**
	21	**Perpendicular**	**N**	**$3,250.00**
	19	**Parallel**	**SE**	**$7,000.00**
	20	**Parallel**	**SW**	**$3,500.00**
890 Olive Ave and **Park St**				**$23,500.00**
	58	**Island-Cut Through**	**NE**	**$2,500.00**
	59	**Perpendicular**	**NW**	**$7,000.00**
	56	**Perpendicular**	**SE**	**$7,000.00**

57	**Perpendicular**	**SW**	**$7,000.00**
1213 Olive Ave and Roosevelt Ave			**$6,500.00**
3034	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3033	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3036	**Perpendicular**	**SE**	**$6,500.00**
3035	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1228 Olive Ave and S G St			**$7,000.00**
3074	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3073	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3072	**Curb Ramp Required**	**SW**	**$7,000.00**
941 Olive Ave and S I St			**$21,000.00**
5	**Parallel**	**NE**	**$7,000.00**
6	**Parallel**	**NW**	**$7,000.00**
7	**Curb Ramp Required**	**S**	**$7,000.00**
983 Olive Ave and S K St			**$27,500.00**
22	**Parallel**	**NE**	**$7,000.00**
23	**Perpendicular**	**NW**	**$6,500.00**
25	**Perpendicular**	**SE**	**$7,000.00**
24	**Perpendicular**	**SW**	**$7,000.00**
1060 Olive Ave and S N St			**$21,000.00**
35	**Perpendicular**	**NE**	**$7,000.00**
37	**Perpendicular**	**NW**	**$7,000.00**
36	**Curb Ramp Required**	**S**	**$7,000.00**
1106 Olive Ave and S O St			**$6,250.00**
47	**Driveway**	**N**	**$0.00**
46	**Perpendicular**	**SE**	**$3,250.00**
45	**Parallel**	**SW**	**$3,000.00**
1105 Olive Ave and S P St			**$16,500.00**
38	**Perpendicular**	**NE**	**$6,500.00**
39	**Perpendicular**	**NW**	**$3,000.00**
40	**Curb Ramp Required**	**S**	**$7,000.00**
984 Olive Ave and Santa Bonita St			**$10,250.00**
55	**Driveway**	**N**	**$0.00**
54	**Perpendicular**	**SE**	**$7,000.00**
53	**Perpendicular**	**SW**	**$3,250.00**
1202 Olive Ave and Santa Cruz St			**$37,750.00**
29	**Perpendicular**	**ENE**	**$7,000.00**
28	**Perpendicular**	**NW**	**$9,750.00**
31	**Perpendicular**	**SE**	**$7,000.00**
30	**Perpendicular**	**SW**	**$7,000.00**
26	**Perpendicular**	**WNW**	**$7,000.00**
777 Olive Ave and Sixth St			**$14,000.00**
41	**Perpendicular**	**NE**	**$7,000.00**

42	**Perpendicular**	**NW**	**$7,000.00**
1367 Olive Ave and **Tozer St**			**$6,000.00**
3477	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3480	**Perpendicular**	**NW**	**$3,000.00**
3478	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3479	**Perpendicular**	**SW**	**$3,000.00**
549 Olive Ave and **Wallace Ave**			**$19,500.00**
3086	**Perpendicular**	**NE**	**$6,500.00**
3087	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3088	**Perpendicular**	**SE**	**$6,500.00**
3089	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Orange Tree Dr **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
474 Orange Tree Dr and **Toschi Dr**			**$20,000.00**
2684	**Perpendicular**	**NW**	**$6,500.00**
2682	**Curb Ramp Required**	**SE**	**$7,000.00**
2683	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Orchard Ave **$27,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1110 Orchard Ave and **Fillmore Ave**			**$20,500.00**
4391	**Curb Ramp Required**	**E**	**$7,000.00**
4392	**Perpendicular**	**N**	**$6,500.00**
4393	**Perpendicular**	**S**	**$7,000.00**
1415 Orchard Ave and **Venturi Ave**			**$7,000.00**
777	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
778	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
776	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
779	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Orchard Hill Dr **$9,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1547 Orchard Hill Dr and **Colima Ave**			**$9,500.00**
2797	**Curb Ramp Required**	**NW**	**$7,000.00**
2796	**Perpendicular**	**SE**	**$2,500.00**

Total Cost for Street: Oso Dr **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
625 Oso Dr and **Knox St**			**$20,000.00**

3096	**Curb Ramp Required**	**NW**	**$7,000.00**
3094	**Perpendicular**	**SE**	**$6,500.00**
3095	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Owens St — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
22 Owens St and Adell St			**$0.00**
3873	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3875	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3874	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
637 Owens St and Harding Ave			**$13,500.00**
1195	**Curb Ramp Required**	**E**	**$7,000.00**
1197	**Perpendicular**	**NW**	**$6,500.00**
1196	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
713 Owens St and W Clark St			**$7,000.00**
3871	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3870	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3872	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Padre St — $33,500.00

Intersection ID and Street Names:	Type:	Orientation:	
558 Padre St and Peerless St			**$20,000.00**
3115	**Curb Ramp Required**	**NW**	**$7,000.00**
3113	**Perpendicular**	**SE**	**$6,500.00**
3114	**Perpendicular**	**SW**	**$6,500.00**
1570 Padre St and Solano St			**$13,500.00**
3116	**Perpendicular**	**SE**	**$6,500.00**
3117	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Paintbrush Dr — $86,500.00

Intersection ID and Street Names:	Type:	Orientation:	
893 Paintbrush Dr and Easy Ct			**$16,750.00**
1471	**Perpendicular**	**E**	**$3,250.00**
1469	**Perpendicular**	**N**	**$6,500.00**
1470	**Curb Ramp Required**	**SW**	**$7,000.00**
1142 Paintbrush Dr and Fairmont Ct			**$20,000.00**
1468	**Perpendicular**	**E**	**$6,500.00**
1466	**Curb Ramp Required**	**NW**	**$7,000.00**
1467	**Perpendicular**	**S**	**$6,500.00**
892 Paintbrush Dr and Love Ct			**$16,750.00**
1473	**Perpendicular**	**E**	**$6,500.00**

1474	**Perpendicular**	**N**	**$3,250.00**
1472	**Curb Ramp Required**	**SW**	**$7,000.00**
1209 Paintbrush Dr and **Riverview Dr**			**$13,000.00**
1478	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1479	**Perpendicular**	**SE**	**$6,500.00**
1480	**Perpendicular**	**SW**	**$6,500.00**
1249 Paintbrush Dr and **Tragon St**			**$20,000.00**
1464	**Perpendicular**	**N**	**$6,500.00**
1463	**Curb Ramp Required**	**SE**	**$7,000.00**
1465	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: Pamela Dr — $59,500.00

Intersection ID and Street Names:	Type:	Orientation:	
609 Pamela Dr and **De Ann Cove**			**$23,000.00**
2370	**Perpendicular**	**NE**	**$6,500.00**
2369	**Perpendicular**	**NW**	**$2,500.00**
2371	**Curb Ramp Required**	**SE**	**$7,000.00**
2368	**Curb Ramp Required**	**SW**	**$7,000.00**
608 Pamela Dr and **Deborah Ln**			**$20,000.00**
2379	**Perpendicular**	**NE**	**$6,500.00**
2378	**Perpendicular**	**NW**	**$6,500.00**
2380	**Curb Ramp Required**	**SW**	**$7,000.00**
610 Pamela Dr and **Taylor Lane**			**$16,500.00**
2376	**Perpendicular**	**NE**	**$6,500.00**
2375	**Perpendicular**	**NW**	**$3,000.00**
2377	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Papaya St — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1493 Papaya St and **E Almond Ave**			**$20,000.00**
3511	**Curb Ramp Required**	**NW**	**$7,000.00**
3512	**Perpendicular**	**SE**	**$6,500.00**
3510	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Park Ln — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
428 Park Ln and **N Park Dr**			**$0.00**
937	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
939	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
938	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Park St — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
1247 Park St and Maple St			**$0.00**
2749	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2748	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2747	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Parkwood Ave — $85,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1499 Parkwood Ave and Lemon Ave			**$33,500.00**
3016	**Perpendicular**	**NE**	**$6,500.00**
3012	**Perpendicular**	**NW**	**$6,500.00**
3015	**Perpendicular**	**SE**	**$13,500.00**
3014	**Curb Ramp Required**	**SW**	**$7,000.00**
1500 Parkwood Ave and Raymond Thomas St			**$13,000.00**
3002	**Perpendicular**	**NE**	**$6,500.00**
3005	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3003	**Perpendicular**	**SE**	**$6,500.00**
3004	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
688 Parkwood Ave and Valencia Ave			**$39,000.00**
3010	**Perpendicular**	**ENE**	**$6,500.00**
3011	**Perpendicular**	**NNE**	**$6,500.00**
3006	**Perpendicular**	**NW**	**$6,500.00**
3009	**Perpendicular**	**SE**	**$6,500.00**
3008	**Perpendicular**	**SSW**	**$6,500.00**
3007	**Perpendicular**	**WSW**	**$6,500.00**

Total Cost for Street: Paseo Del Mar Prkw — $36,500.00

Intersection ID and Street Names:	Type:	Orientation:	
421 Paseo Del Mar Prkw and Rancho Mirage Rd			**$16,500.00**
3140	**Perpendicular**	**NE**	**$6,500.00**
3141	**Perpendicular**	**SE**	**$3,000.00**
3142	**Curb Ramp Required**	**SW**	**$7,000.00**
420 Paseo Del Mar Prkw and San Gabriel Dr			**$20,000.00**
3464	**Perpendicular**	**NW**	**$6,500.00**
3466	**Curb Ramp Required**	**SE**	**$7,000.00**
3465	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Paul Ave — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1182 Paul Ave and Schnoor Ave			**$7,000.00**
795	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
796	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
794	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Peach Ct — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
306 Peach Ct and Peach St			**$20,000.00**
3499	**Perpendicular**	**NE**	**$6,500.00**
3501	**Perpendicular**	**SE**	**$6,500.00**
3500	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Peach St — $10,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1593 Peach St and Nectarine St			**$10,500.00**
3502	**Parallel**	**NE**	**$3,500.00**
3503	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Peach Tree Dr — $60,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1472 Peach Tree Dr and Apple Tree Ct			**$16,750.00**
2644	**Perpendicular**	**NE**	**$6,500.00**
2645	**Curb Ramp Required**	**NW**	**$7,000.00**
2643	**Perpendicular**	**SE**	**$3,250.00**
33 Peach Tree Dr and Cherry Tree Dr			**$13,500.00**
2638	**Perpendicular**	**NE**	**$3,250.00**
2637	**Perpendicular**	**NW**	**$3,250.00**
2639	**Curb Ramp Required**	**SE**	**$7,000.00**
1471 Peach Tree Dr and Orange Tree Ct			**$13,500.00**
2642	**Perpendicular**	**NE**	**$3,250.00**
2641	**Perpendicular**	**SE**	**$3,250.00**
2640	**Curb Ramp Required**	**SW**	**$7,000.00**
1474 Peach Tree Dr and Pear Tree Dr			**$16,750.00**
2651	**Curb Ramp Required**	**NE**	**$7,000.00**
2649	**Perpendicular**	**SE**	**$6,500.00**
2650	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Peanut Ct — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1473 Peanut Ct and Peach Tree Dr			**$13,500.00**
2647	**Perpendicular**	**NE**	**$3,250.00**
2648	**Curb Ramp Required**	**NW**	**$7,000.00**
2646	**Perpendicular**	**SE**	**$3,250.00**

Total Cost for Street: Peanut Dr — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
562 Peanut Dr and Toschi Dr			**$20,000.00**
2694	**Perpendicular**	**NW**	**$6,500.00**
2692	**Curb Ramp Required**	**SE**	**$7,000.00**
2693	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Pear Ct — $13,250.00

Intersection ID and Street Names:	Type:	Orientation:	
158 Pear Ct and Pear St			**$13,250.00**
3517	**Perpendicular**	**N**	**$3,250.00**
3519	**Perpendicular**	**SE**	**$3,000.00**
3518	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Pear St — $66,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1588 Pear St and Apple St			**$7,000.00**
3476	**Parallel**	**SW**	**$7,000.00**
62 Pear St and E Almond Ave			**$26,000.00**
3515	**Perpendicular**	**NE**	**$6,500.00**
3514	**Perpendicular**	**NW**	**$6,500.00**
3516	**Perpendicular**	**SE**	**$6,500.00**
3513	**Perpendicular**	**SW**	**$6,500.00**
550 Pear St and Kiwi St			**$13,000.00**
3522	**Perpendicular**	**NW**	**$3,000.00**
3521	**Curb Ramp Required**	**SE**	**$7,000.00**
3520	**Perpendicular**	**SW**	**$3,000.00**
63 Pear St and Madarin St			**$20,000.00**
3540	**Perpendicular**	**NE**	**$6,500.00**
3541	**Curb Ramp Required**	**NW**	**$7,000.00**
3539	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Pear Tree Dr — $27,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1534 Pear Tree Dr and Berry Dr			**$13,500.00**
2664	Curb Ramp Required	NW	$7,000.00
2663	Perpendicular	SE	$6,500.00
1475 Pear Tree Dr and Hazelnut Dr			**$13,500.00**
2630	Perpendicular	NE	$3,250.00
2629	Perpendicular	SE	$3,250.00
2631	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: Pecan Ave — $65,500.00

Intersection ID and Street Names:	Type:	Orientation:	
413 Pecan Ave and Apricot Lane			**$0.00**
2984	No Sidewalk, Curb Ramp Not Required	NE	$0.00
2983	No Sidewalk, Curb Ramp Not Required	NW	$0.00
1454 Pecan Ave and Ave 13			**$9,500.00**
2933	Perpendicular	NE	$6,500.00
2934	Perpendicular	NW	$3,000.00
2936	No Sidewalk, Curb Ramp Not Required	SE	$0.00
2935	No Sidewalk, Curb Ramp Not Required	SW	$0.00
970 Pecan Ave and Colombard Dr			**$13,000.00**
2869	Perpendicular	NE	$6,500.00
2868	Perpendicular	NW	$6,500.00
2870	No Sidewalk, Curb Ramp Not Required	SE	$0.00
880 Pecan Ave and Concord Ct			**$13,000.00**
2859	Perpendicular	NE	$6,500.00
2860	Perpendicular	NW	$6,500.00
2861	No Sidewalk, Curb Ramp Not Required	SW	$0.00
881 Pecan Ave and Monterey St			**$6,500.00**
2862	Perpendicular	NE	$6,500.00
2863	No Sidewalk, Curb Ramp Not Required	NW	$0.00
2864	No Sidewalk, Curb Ramp Not Required	SE	$0.00
409 Pecan Ave and Munra Ave			**$13,000.00**
2826	No Sidewalk, Curb Ramp Not Required	NE	$0.00
2825	Perpendicular	SE	$6,500.00
2824	Perpendicular	SW	$6,500.00
569 Pecan Ave and Pine St			**$9,500.00**
2821	Perpendicular	NE	$6,500.00
2820	Perpendicular	NNW	$3,000.00
2822	No Sidewalk, Curb Ramp Not Required	SE	$0.00

2823	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
2819	**Perpendicular**	**WNW**	**$0.00**
684 Pecan Ave and Victory Lane			**$1,000.00**
2817	**Perpendicular**	**NE**	**$500.00**
2816	**Perpendicular**	**NW**	**$500.00**
2818	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Penny Way $28,750.00

Intersection ID and Street Names:	Type:	Orientation:	
517 Penny Way and Fairfield Way			**$12,750.00**
2362	**Perpendicular**	**NE**	**$2,500.00**
2361	**Perpendicular**	**NW**	**$3,250.00**
2363	**Curb Ramp Required**	**SE**	**$7,000.00**
516 Penny Way and Fairway Ave			**$16,000.00**
2293	**Curb Ramp Required**	**NW**	**$7,000.00**
2291	**Perpendicular**	**SE**	**$2,500.00**
2292	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Percy St $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
147 Percy St and Clinton St			**$10,000.00**
3208	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3207	**Combination**	**N**	**$7,000.00**
3206	**Perpendicular**	**W**	**$3,000.00**
148 Percy St and Santa Fe St			**$3,500.00**
3214	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3213	**Perpendicular**	**S**	**$500.00**
3215	**Perpendicular**	**W**	**$3,000.00**

Total Cost for Street: Perkins Ave $30,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1564 Perkins Ave and Lemon Ave			**$10,250.00**
3018	**Curb Ramp Required**	**SE**	**$7,000.00**
3017	**Perpendicular**	**SW**	**$3,250.00**
1465 Perkins Ave and Tangerine Ave			**$20,000.00**
2995	**Perpendicular**	**NE**	**$6,500.00**
2997	**Curb Ramp Required**	**NW**	**$7,000.00**
2996	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Persimmon St			$13,500.00
Intersection ID and Street Names:	Type:	Orientation:	
1590 Persimmon St and Coconut St			**$13,500.00**
3486	**Perpendicular**	**NE**	**$6,500.00**
3487	**Curb Ramp Required**	**NW**	**$7,000.00**

Total Cost for Street: Petite Ave			$38,500.00
Intersection ID and Street Names:	Type:	Orientation:	
615 Petite Ave and Merlot Ave			**$18,500.00**
2530	**Perpendicular**	**NE**	**$6,500.00**
2529	**Perpendicular**	**NW**	**$2,500.00**
2531	**Perpendicular**	**SE**	**$6,500.00**
2532	**Perpendicular**	**SW**	**$3,000.00**
1055 Petite Ave and Rhine Ct			**$20,000.00**
2533	**Perpendicular**	**NE**	**$6,500.00**
2535	**Curb Ramp Required**	**NW**	**$7,000.00**
2534	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Petite Ct			$20,000.00
Intersection ID and Street Names:	Type:	Orientation:	
1210 Petite Ct and Petite Ave			**$20,000.00**
2538	**Perpendicular**	**NE**	**$6,500.00**
2537	**Perpendicular**	**SE**	**$6,500.00**
2536	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Philip St			$22,750.00
Intersection ID and Street Names:	Type:	Orientation:	
53 Philip St and E Cleveland Ave			**$9,750.00**
1215	**Perpendicular**	**NE**	**$6,500.00**
1214	**Perpendicular**	**NW**	**$3,250.00**
52 Philip St and W Sherwood Way			**$13,000.00**
1243	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1245	**Perpendicular**	**SE**	**$6,500.00**
1244	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Pierce Ln			$36,750.00
Intersection ID and Street Names:	Type:	Orientation:	
347 Pierce Ln and Coolidge St			**$16,750.00**

1938	**Perpendicular**	**NE**	**$3,250.00**
1937	**Perpendicular**	**NW**	**$6,500.00**
1936	**Curb Ramp Required**	**S**	**$7,000.00**
346 Pierce Ln and Madison Dr			**$20,000.00**
1931	**Perpendicular**	**NE**	**$6,500.00**
1932	**Perpendicular**	**SE**	**$6,500.00**
1930	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Pine St — $36,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1539 Pine St and			**$23,000.00**
2736	**Perpendicular**	**NE**	**$13,500.00**
2737	**Perpendicular**	**SE**	**$9,500.00**
2738	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
988 Pine St and Fourth St			**$0.00**
501	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
503	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
502	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1542 Pine St and Gill Ave			**$3,000.00**
2769	**Perpendicular**	**NE**	**$3,000.00**
2770	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2771	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1121 Pine St and National Ave			**$0.00**
424	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
426	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
425	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
982 Pine St and Oak St			**$10,250.00**
4388	**Perpendicular**	**N**	**$3,250.00**
4390	**Parallel**	**S**	**$7,000.00**
4389	**Driveway**	**W**	**$0.00**
1008 Pine St and Third St			**$0.00**
421	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
423	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
422	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Pinewood Ct — $28,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1342 Pinewood Ct and Pinewood Dr			**$28,000.00**
1597	**Perpendicular**	**NE**	**$7,000.00**
1600	**Perpendicular**	**NW**	**$7,000.00**
1598	**Perpendicular**	**SE**	**$7,000.00**
1599	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Pinewood Dr — $43,750.00

Intersection ID and Street Names:	Type:	Orientation:	
839 Pinewood Dr and Monocott Dr			**$16,750.00**
1580	**Perpendicular**	**NE**	**$6,500.00**
1579	**Perpendicular**	**SE**	**$3,250.00**
1578	**Curb Ramp Required**	**W**	**$7,000.00**
916 Pinewood Dr and N Granada Dr			**$27,000.00**
1601	**Perpendicular**	**NE**	**$7,000.00**
1602	**Perpendicular**	**NW**	**$6,500.00**
1604	**Perpendicular**	**SE**	**$7,000.00**
1603	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Plumas St — $6,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1041 Plumas St and DWayer Ave			**$6,500.00**
2621	**Perpendicular**	**NE**	**$6,500.00**
2622	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Podres Ln — $9,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1579 Podres Ln and Lilly St			**$9,000.00**
3293	**Perpendicular**	**N**	**$2,500.00**
3294	**Perpendicular**	**S**	**$6,500.00**

Total Cost for Street: Polk Ave — $33,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1486 Polk Ave and Truman Dr			**$33,000.00**
1944	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1943	**Perpendicular**	**NE**	**$6,500.00**
1946	**Perpendicular**	**NW**	**$6,500.00**
1942	**Perpendicular**	**SE**	**$6,500.00**
1945	**Perpendicular**	**SW**	**$6,500.00**
1941	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Pomegranate St — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
184 Pomegranate St and Persimmon St			**$16,750.00**
3489	**Curb Ramp Required**	**NE**	**$7,000.00**

3488	**Perpendicular**	**SE**	**$6,500.00**
3490	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Popoli Way — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
552 Popoli Way and **Gabriel Way**			**$13,500.00**
3904	**Curb Ramp Required**	**N**	**$7,000.00**
3903	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Quady Ln — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
97 Quady Ln and **Oakridge Dr**			**$20,000.00**
213	**Perpendicular**	**NE**	**$6,500.00**
212	**Perpendicular**	**NW**	**$6,500.00**
211	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Rancho Mirage Rd — $63,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1573 Rancho Mirage Rd and **La Quinta Way**			**$13,500.00**
3143	**Perpendicular**	**NE**	**$6,500.00**
3144	**Curb Ramp Required**	**SW**	**$7,000.00**
602 Rancho Mirage Rd and **Linda Mesa Dr**			**$20,000.00**
3134	**Perpendicular**	**NE**	**$6,500.00**
3136	**Curb Ramp Required**	**NW**	**$7,000.00**
3135	**Perpendicular**	**SE**	**$6,500.00**
1572 Rancho Mirage Rd and **Loma Linda Dr**			**$13,500.00**
3133	**Curb Ramp Required**	**NE**	**$7,000.00**
3132	**Perpendicular**	**SE**	**$6,500.00**
601 Rancho Mirage Rd and **Ortega Dr**			**$16,500.00**
3131	**Curb Ramp Required**	**NE**	**$7,000.00**
3130	**Perpendicular**	**NW**	**$6,500.00**
3129	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Rd 27 — $12,500.00

Intersection ID and Street Names:	Type:	Orientation:	
251 Rd 27 and **E Ellis St**			**$12,500.00**
2136	**Perpendicular**	**NE**	**$3,000.00**
2137	**Blended Transition**	**NW**	**$3,000.00**
2135	**Perpendicular**	**SE**	**$6,500.00**
2138	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Rd 28 — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1453 Rd 28 and Ave 13 1/2			**$6,000.00**
3529	**Perpendicular**	**NE**	**$0.00**
3530	**Perpendicular**	**NW**	**$3,000.00**
3528	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3527	**Perpendicular**	**SW**	**$3,000.00**
1494 Rd 28 and Knox Rd			**$14,000.00**
4413	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
4412	**Perpendicular**	**NW**	**$7,000.00**
4414	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Ren Way — $62,000.00

Intersection ID and Street Names:	Type:	Orientation:	
482 Ren Way and Double Tree Way			**$21,000.00**
1853	**Perpendicular**	**NE**	**$7,000.00**
1854	**Perpendicular**	**NW**	**$7,000.00**
1852	**Curb Ramp Required**	**S**	**$7,000.00**
1192 Ren Way and Granada Dr			**$0.00**
1775	**Driveway**	**E**	**$0.00**
1774	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1773	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1158 Ren Way and Westberry Bvd			**$21,000.00**
1870	**Curb Ramp Required**	**E**	**$7,000.00**
1871	**Perpendicular**	**NW**	**$7,000.00**
1872	**Perpendicular**	**SW**	**$7,000.00**
1157 Ren Way and Zak Way			**$20,000.00**
1704	**Perpendicular**	**NE**	**$6,500.00**
1703	**Perpendicular**	**NW**	**$6,500.00**
1702	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Renee Way — $40,000.00

Intersection ID and Street Names:	Type:	Orientation:	
974 Renee Way and Lucia Way			**$20,000.00**
3925	**Perpendicular**	**NE**	**$6,500.00**
3924	**Perpendicular**	**SE**	**$6,500.00**
3923	**Curb Ramp Required**	**W**	**$7,000.00**
973 Renee Way and Noreen Way			**$20,000.00**
3930	**Curb Ramp Required**	**E**	**$7,000.00**
3931	**Perpendicular**	**NW**	**$6,500.00**

3929	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Riverside Ct — $10,750.00

Intersection ID and Street Names:	Type:	Orientation:	
496 Riverside Ct and E Riverside Dr			**$10,750.00**
4087	**Curb Ramp Required**	**N**	**$7,000.00**
4088	**Perpendicular**	**SE**	**$500.00**
4089	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Riverside Dr — $13,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1221 Riverside Dr and Sierra St			**$13,000.00**
1162	**Perpendicular**	**NE**	**$6,500.00**
1163	**Perpendicular**	**NW**	**$6,500.00**
1161	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: Riverview Dr — $187,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1164 Riverview Dr and Aram Ave			**$21,000.00**
894	**Curb Ramp Required**	**N**	**$7,000.00**
892	**Curb Ramp Required**	**SE**	**$7,000.00**
893	**Curb Ramp Required**	**SW**	**$7,000.00**
1199 Riverview Dr and Imperial Dr			**$23,250.00**
699	**Perpendicular**	**NE**	**$6,500.00**
700	**Perpendicular**	**NW**	**$7,000.00**
698	**Perpendicular**	**SE**	**$3,250.00**
701	**Perpendicular**	**SW**	**$6,500.00**
728 Riverview Dr and Mainberry Dr			**$21,000.00**
636	**Curb Ramp Required**	**N**	**$7,000.00**
637	**Perpendicular**	**SE**	**$7,000.00**
638	**Perpendicular**	**SW**	**$7,000.00**
762 Riverview Dr and Monocott Dr			**$20,000.00**
1581	**Curb Ramp Required**	**N**	**$7,000.00**
1582	**Perpendicular**	**SE**	**$6,500.00**
1583	**Perpendicular**	**SW**	**$6,500.00**
1282 Riverview Dr and N Granada Dr			**$27,000.00**
1589	**Perpendicular**	**NE**	**$7,000.00**
1588	**Perpendicular**	**NW**	**$6,500.00**
1590	**Perpendicular**	**SE**	**$6,500.00**
1587	**Perpendicular**	**SW**	**$7,000.00**
727 Riverview Dr and Shannon Ave			**$21,000.00**

621	**Curb Ramp Required**	**N**	**$7,000.00**
623	**Perpendicular**	**SE**	**$7,000.00**
622	**Perpendicular**	**SW**	**$7,000.00**

1099 Riverview Dr and **Summer Set Ln** **$13,500.00**

1403	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1402	**Perpendicular**	**SE**	**$6,500.00**
1404	**Perpendicular**	**SW**	**$7,000.00**

1100 Riverview Dr and **Westberry Bvd** **$20,500.00**

738	**Curb Ramp Required**	**E**	**$7,000.00**
737	**Perpendicular**	**NW**	**$6,500.00**
739	**Perpendicular**	**SW**	**$7,000.00**

763 Riverview Dr and **Wolftrap Ct** **$20,000.00**

1584	**Curb Ramp Required**	**N**	**$7,000.00**
1585	**Perpendicular**	**SE**	**$6,500.00**
1586	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Riverwalk Dr **$21,000.00**

Intersection ID and Street Names:	Type:	Orientation:	

515 Riverwalk Dr and **N B St** **$21,000.00**

3834	**Curb Ramp Required**	**N**	**$7,000.00**
3836	**Perpendicular**	**SE**	**$7,000.00**
3835	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Robinwood Way **$6,500.00**

Intersection ID and Street Names:	Type:	Orientation:	

607 Robinwood Way and **Kern St** **$6,500.00**

2228	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2227	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street: Rogers St **$49,000.00**

Intersection ID and Street Names:	Type:	Orientation:	

207 Rogers St and **E Cleveland Ave** **$21,000.00**

4185	**Parallel**	**NE**	**$7,000.00**
4187	**Parallel**	**NW**	**$7,000.00**
4186	**Curb Ramp Required**	**S**	**$7,000.00**

204 Rogers St and **Green Way** **$21,000.00**

4033	**Combination**	**NE**	**$7,000.00**
4030	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
4032	**Combination**	**SE**	**$7,000.00**
4031	**Perpendicular**	**SW**	**$7,000.00**

206 Rogers St and **W Sherwood Way** **$7,000.00**

2258	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2259	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2257	**Curb Ramp Required**	**SE**	**$7,000.00**
2260	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
205 Rogers St and Wessmith Way			**$0.00**
2249	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2246	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2248	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2247	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Roosevelt Ave **$58,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
889 Roosevelt Ave and 14Th St			**$9,250.00**
3026	**Perpendicular**	**NW**	**$3,250.00**
3028	**Perpendicular**	**SE**	**$3,000.00**
3027	**Perpendicular**	**SW**	**$3,000.00**
1218 Roosevelt Ave and Lake St			**$16,750.00**
3355	**Perpendicular**	**NE**	**$6,500.00**
3354	**Perpendicular**	**SE**	**$3,250.00**
3353	**Parallel**	**SW**	**$7,000.00**
1083 Roosevelt Ave and S C St			**$19,500.00**
3030	**Perpendicular**	**NE**	**$6,500.00**
3029	**Perpendicular**	**NNW**	**$6,500.00**
3032	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
3031	**Perpendicular**	**WNW**	**$6,500.00**
823 Roosevelt Ave and Sunrise Ave			**$13,250.00**
3342	**Curb Ramp Required**	**NW**	**$7,000.00**
3340	**Perpendicular**	**SE**	**$3,000.00**
3341	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Rose St **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1248 Rose St and Washington St			**$0.00**
3276	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3274	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3275	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Rosewood Cr **$53,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
857 Rosewood Cr and Double Tree Way			**$53,000.00**
1502	**Perpendicular**	**NE**	**$6,500.00**

1501	Perpendicular	NNE	$6,500.00
1509	Perpendicular	NW	$6,500.00
1510	Perpendicular	SE	$13,000.00
1505	Perpendicular	SSE	$6,500.00
1511	Curb Ramp Required	W	$14,000.00

Total Cost for Street: Rotan Ave — $28,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1451 Rotan Ave and Fifth St			**$28,000.00**
529	Combination	NE	$7,000.00
526	Curb Ramp Required	NW	$7,000.00
528	Combination	SE	$7,000.00
527	Combination	SW	$7,000.00
1424 Rotan Ave and Third St			**$0.00**
459	No Sidewalk, Curb Ramp Not Required	NE	$0.00
458	No Sidewalk, Curb Ramp Not Required	NW	$0.00
460	No Sidewalk, Curb Ramp Not Required	SE	$0.00
461	No Sidewalk, Curb Ramp Not Required	SW	$0.00

Total Cost for Street: Royal Dr — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
702 Royal Dr and University Ave			**$20,500.00**
705	Curb Ramp Required	N	$7,000.00
706	Perpendicular	SE	$7,000.00
704	Perpendicular	SW	$6,500.00

Total Cost for Street: Rubicon Ave — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1546 Rubicon Ave and Ivy Glen Dr			**$7,000.00**
2791	Parallel	NE	$7,000.00
2792	Under Construction	SW	$0.00

Total Cost for Street: Running Brook Dr — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
551 Running Brook Dr and San Pietro Dr			**$13,500.00**
2329	Perpendicular	NE	$6,500.00
2328	Perpendicular	NW	$0.00
2330	Curb Ramp Required	SE	$7,000.00

Total Cost for Street: Rush St — $29,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1336 Rush St and Austin Ave			**$7,000.00**
1252	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1251	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1253	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1250	**Curb Ramp Required**	**SW**	**$7,000.00**
1335 Rush St and Dellavalle Ave			**$6,500.00**
1248	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1249	**Perpendicular**	**NW**	**$6,500.00**
1247	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1246	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
419 Rush St and N D St			**$16,000.00**
1321	**Perpendicular**	**NE**	**$3,250.00**
1322	**Perpendicular**	**NW**	**$3,000.00**
1324	**Perpendicular**	**SE**	**$6,500.00**
1323	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: S A St — $140,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1149 S A St and 10Th St			**$62,000.00**
4294	**Curb Ramp Required**	**E**	**$7,000.00**
4288	**Perpendicular**	**NE**	**$7,000.00**
4287	**Perpendicular**	**NNE**	**$6,500.00**
4286	**Perpendicular**	**NNW**	**$6,500.00**
4285	**Parallel**	**NW**	**$7,000.00**
4293	**Perpendicular**	**S**	**$7,000.00**
4283	**Perpendicular**	**SE**	**$7,000.00**
4292	**Perpendicular**	**W**	**$14,000.00**
1446 S A St and 6Th St			**$24,250.00**
4455	**Combination**	**E**	**$7,000.00**
4454	**Combination**	**N**	**$7,000.00**
4456	**Combination**	**S**	**$7,000.00**
4453	**Perpendicular**	**W**	**$3,250.00**
1417 S A St and Clinton St			**$17,000.00**
4319	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
4320	**Perpendicular**	**N**	**$7,000.00**
4322	**Perpendicular**	**S**	**$3,000.00**
4321	**Combination**	**W**	**$7,000.00**
1155 S A St and Roosevelt Ave			**$19,750.00**
3429	**Perpendicular**	**NE**	**$3,250.00**

3430	**Perpendicular**	**NW**	**$6,500.00**
3428	**Perpendicular**	**SE**	**$6,500.00**
3431	**Parallel**	**SW**	**$3,500.00**
1416 S A St and **Sunrise Ave**			**$17,500.00**
4289	**Parallel**	**NE**	**$3,500.00**
4290	**Perpendicular**	**NW**	**$7,000.00**
4291	**Parallel**	**SW**	**$7,000.00**

Total Cost for Street: S B St **$42,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1438 S B St and **14Th St**			**$16,250.00**
3025	**Perpendicular**	**NE**	**$6,500.00**
3024	**Perpendicular**	**NW**	**$6,500.00**
3023	**Perpendicular**	**SW**	**$3,250.00**
1180 S B St and **9Th St**			**$26,500.00**
4329	**Perpendicular**	**E**	**$6,500.00**
4330	**Perpendicular**	**N**	**$7,000.00**
4328	**Perpendicular**	**S**	**$6,500.00**
4327	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: S C St **$136,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1300 S C St and **10Th St**			**$16,250.00**
3674	**Perpendicular**	**E**	**$3,250.00**
3673	**Perpendicular**	**N**	**$6,500.00**
3675	**Perpendicular**	**S**	**$3,250.00**
3672	**Perpendicular**	**W**	**$3,250.00**
1301 S C St and **11Th St**			**$22,000.00**
3611	**Perpendicular**	**E**	**$6,500.00**
3612	**Perpendicular**	**N**	**$6,500.00**
3610	**Perpendicular**	**S**	**$2,500.00**
3609	**Perpendicular**	**W**	**$6,500.00**
1422 S C St and **14Th St**			**$26,000.00**
3067	**Perpendicular**	**E**	**$6,500.00**
3066	**Perpendicular**	**N**	**$6,500.00**
3064	**Perpendicular**	**S**	**$6,500.00**
3065	**Perpendicular**	**W**	**$6,500.00**
1286 S C St and **6Th St**			**$19,500.00**
3658	**Perpendicular**	**E**	**$6,500.00**
3655	**Perpendicular**	**N**	**$3,000.00**
3657	**Combination**	**S**	**$3,500.00**
3656	**Perpendicular**	**W**	**$6,500.00**

752	**S C St** and **7Th St**			**$13,500.00**
	3661	**Curb Ramp Required**	**E**	**$7,000.00**
	3660	**Perpendicular**	**S**	**$3,250.00**
	3659	**Perpendicular**	**W**	**$3,250.00**
1372	**S C St** and **9Th St**			**$26,000.00**
	3670	**Perpendicular**	**E**	**$6,500.00**
	3669	**Perpendicular**	**N**	**$6,500.00**
	3671	**Perpendicular**	**S**	**$6,500.00**
	3668	**Perpendicular**	**W**	**$6,500.00**
1595	**S C St** and **Clinton St**			**$13,500.00**
	3667	**Curb Ramp Required**	**E**	**$7,000.00**
	3666	**Perpendicular**	**S**	**$3,250.00**
	3665	**Perpendicular**	**W**	**$3,250.00**

Total Cost for Street: S D St **$102,750.00**

Intersection ID and Street Names:		Type:	Orientation:	
1334	**S D St** and **13Th St**			**$26,000.00**
	3056	**Perpendicular**	**E**	**$6,500.00**
	3055	**Perpendicular**	**N**	**$6,500.00**
	3053	**Perpendicular**	**S**	**$6,500.00**
	3054	**Perpendicular**	**W**	**$6,500.00**
1281	**S D St** and **14Th St**			**$16,250.00**
	3060	**Perpendicular**	**E**	**$3,250.00**
	3057	**Perpendicular**	**N**	**$6,500.00**
	3059	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
	3058	**Perpendicular**	**W**	**$6,500.00**
1278	**S D St** and **9Th St**			**$26,500.00**
	3630	**Perpendicular**	**E**	**$6,500.00**
	3631	**Combination**	**N**	**$7,000.00**
	3629	**Perpendicular**	**S**	**$6,500.00**
	3632	**Perpendicular**	**W**	**$6,500.00**
1279	**S D St** and **Clinton St**			**$20,500.00**
	3634	**Combination**	**E**	**$7,000.00**
	3635	**Perpendicular**	**N**	**$6,500.00**
	3633	**Combination**	**S**	**$7,000.00**
	3636	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
742	**S D St** and **Olive Ave**			**$13,500.00**
	3045	**Perpendicular**	**NE**	**$6,500.00**
	3046	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	3047	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: S Double Tree Way — $50,250.00

Intersection ID and Street Names:	Type:	Orientation:	
471 S Double Tree Way and Gamay Ave			**$8,000.00**
2588	Perpendicular	NE	$500.00
2587	Perpendicular	NW	$500.00
2586	Curb Ramp Required	SW	$7,000.00
472 S Double Tree Way and Maple St			**$12,750.00**
1899	Perpendicular	NE	$2,500.00
1900	Perpendicular	SE	$3,250.00
1898	Curb Ramp Required	W	$7,000.00
473 S Double Tree Way and Pluma St			**$16,500.00**
1901	Curb Ramp Required	N	$7,000.00
1902	Perpendicular	SE	$3,000.00
1903	Perpendicular	SW	$6,500.00
484 S Double Tree Way and W Almond Ave			**$13,000.00**
2570	Perpendicular	NE	$6,500.00
2572	Perpendicular	NW	$6,500.00
2571	No Sidewalk, Curb Ramp Not Required	SE	$0.00

Total Cost for Street: S E St — $47,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1371 S E St and 11Th St			**$0.00**
4400	No Sidewalk, Curb Ramp Not Required	E	$0.00
4399	No Sidewalk, Curb Ramp Not Required	N	$0.00
4401	No Sidewalk, Curb Ramp Not Required	SW	$0.00
858 S E St and 12Th St			**$0.00**
4403	No Sidewalk, Curb Ramp Not Required	E	$0.00
4402	No Sidewalk, Curb Ramp Not Required	N	$0.00
4404	No Sidewalk, Curb Ramp Not Required	SW	$0.00
859 S E St and 13Th St			**$0.00**
4406	No Sidewalk, Curb Ramp Not Required	E	$0.00
4405	No Sidewalk, Curb Ramp Not Required	N	$0.00
4407	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1338 S E St and 6Th St			**$26,500.00**
4255	Perpendicular	E	$6,500.00
4258	Perpendicular	N	$7,000.00
4256	Perpendicular	S	$6,500.00
4257	Perpendicular	W	$6,500.00
1080 S E St and 7Th St			**$21,000.00**
4254	Parallel	E	$7,000.00

4252	Curb Ramp Required	N	$7,000.00
4253	Curb Ramp Required	W	$7,000.00
1079 S E St and Clinton St			**$0.00**
4251	No Sidewalk, Curb Ramp Not Required	E	$0.00
4249	No Sidewalk, Curb Ramp Not Required	N	$0.00
4250	No Sidewalk, Curb Ramp Not Required	W	$0.00

Total Cost for Street: S G St $80,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1310 S G St and 11Th St			**$22,750.00**
3081	Perpendicular	NE	$6,500.00
3080	Perpendicular	NW	$3,250.00
3082	Perpendicular	SE	$6,500.00
3079	Perpendicular	SW	$6,500.00
101 S G St and E Yosemite Ave			**$14,000.00**
4230	No Sidewalk, Curb Ramp Not Required	NE	$0.00
4231	No Sidewalk, Curb Ramp Not Required	NW	$0.00
4229	Perpendicular	SE	$7,000.00
4228	Perpendicular	SW	$7,000.00
1309 S G St and Eighth St			**$16,750.00**
1124	Perpendicular	E	$3,250.00
1125	Perpendicular	N	$7,000.00
1123	Perpendicular	S	$6,500.00
1122	No Sidewalk, Curb Ramp Not Required	W	$0.00
1398 S G St and Seventh St			**$27,000.00**
1121	Perpendicular	E	$6,500.00
1119	Perpendicular	N	$6,500.00
1118	Curb Ramp Required	S	$7,000.00
1120	Perpendicular	W	$7,000.00

Total Cost for Street: S Gateway Dr $148,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1216 S Gateway Dr and 10Th St			**$17,250.00**
4238	Curb Ramp Required	N	$7,000.00
4240	Combination	S	$7,000.00
4239	Perpendicular	W	$3,250.00
1388 S Gateway Dr and 11Th St			**$22,750.00**
4243	Perpendicular	E	$6,500.00
4242	Perpendicular	N	$3,250.00
4244	Perpendicular	S	$6,500.00
4241	Perpendicular	W	$6,500.00
979 S Gateway Dr and 12Th St			**$20,000.00**

3084	**Curb Ramp Required**	**NE**	**$7,000.00**
3083	**Perpendicular**	**NW**	**$6,500.00**
3085	**Perpendicular**	**SW**	**$6,500.00**
232 S Gateway Dr and 846 S Gateway Dr			**$0.00**
4408	**Driveway**	**W**	**$0.00**
45 S Gateway Dr and E 9Th St			**$17,000.00**
4265	**Curb Ramp Required**	**E**	**$7,000.00**
4263	**Curb Ramp Required**	**N**	**$7,000.00**
4264	**Perpendicular**	**W**	**$3,000.00**
1029 S Gateway Dr and Eighth St			**$20,500.00**
1128	**Curb Ramp Required**	**N**	**$7,000.00**
1126	**Perpendicular**	**S**	**$6,500.00**
1127	**Curb Ramp Required**	**W**	**$7,000.00**
1373 S Gateway Dr and Olive Ave			**$16,750.00**
3068	**Perpendicular**	**NE**	**$3,250.00**
3069	**Perpendicular**	**NW**	**$7,000.00**
3071	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3070	**Perpendicular**	**SW**	**$6,500.00**
43 S Gateway Dr and S Madera Ave			**$17,250.00**
4236	**Curb Ramp Required**	**NW**	**$7,000.00**
4237	**Perpendicular**	**SE**	**$3,250.00**
4235	**Curb Ramp Required**	**SW**	**$7,000.00**
986 S Gateway Dr and Seventh St			**$17,250.00**
1115	**Curb Ramp Required**	**NE**	**$7,000.00**
1116	**Curb Ramp Required**	**S**	**$7,000.00**
1117	**Perpendicular**	**W**	**$3,250.00**

Total Cost for Street: S I St — $76,000.00

Intersection ID and Street Names:	Type:	Orientation:	
766 S I St and Eighth St			**$24,500.00**
166	**Combination**	**E**	**$3,500.00**
165	**Perpendicular**	**N**	**$7,000.00**
167	**Perpendicular**	**S**	**$7,000.00**
168	**Combination**	**W**	**$7,000.00**
1252 S I St and Ninth St			**$24,000.00**
4	**Perpendicular**	**E**	**$7,000.00**
3	**Perpendicular**	**N**	**$7,000.00**
1	**Perpendicular**	**S**	**$3,000.00**
2	**Perpendicular**	**W**	**$7,000.00**
765 S I St and Seventh St			**$27,500.00**
162	**Perpendicular**	**E**	**$7,000.00**
161	**Perpendicular**	**N**	**$6,500.00**
163	**Combination**	**S**	**$7,000.00**

164	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: S J St — $21,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1127 S J St and Ninth St			**$21,000.00**
136	**Perpendicular**	**N**	**$7,000.00**
134	**Curb Ramp Required**	**SE**	**$7,000.00**
135	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: S L St — $90,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1241 S L St and Eighth St			**$21,000.00**
120	**Perpendicular**	**NE**	**$7,000.00**
122	**Perpendicular**	**SE**	**$7,000.00**
121	**Perpendicular**	**W**	**$7,000.00**
1072 S L St and Seventh St			**$27,500.00**
118	**Perpendicular**	**NE**	**$7,000.00**
117	**Perpendicular**	**NW**	**$6,500.00**
119	**Perpendicular**	**SE**	**$7,000.00**
116	**Perpendicular**	**SW**	**$7,000.00**
1347 S L St and Sixth St			**$27,500.00**
89	**Perpendicular**	**NE**	**$7,000.00**
88	**Perpendicular**	**NW**	**$7,000.00**
90	**Perpendicular**	**SE**	**$7,000.00**
91	**Perpendicular**	**SW**	**$6,500.00**
1346 S L St and W Yosemite Ave			**$14,000.00**
100	**Combination**	**NE**	**$0.00**
103	**Combination**	**NW**	**$7,000.00**
101	**Combination**	**SE**	**$0.00**
102	**Combination**	**SW**	**$7,000.00**

Total Cost for Street: S Lake St — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1355 S Lake St and 11Th St			**$20,500.00**
4275	**Perpendicular**	**E**	**$6,500.00**
4274	**Perpendicular**	**S**	**$7,000.00**
4273	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: S Madera Ave — $53,000.00

Intersection ID and Street Names:	Type:	Orientation:

442	**S Madera Ave** and			**$32,000.00**
	4224	**Parallel**	**NE**	**$7,500.00**
	4227	**Perpendicular**	**NW**	**$7,000.00**
	4225	**Perpendicular**	**SE**	**$10,500.00**
	4226	**Perpendicular**	**SW**	**$7,000.00**
1337	**S Madera Ave** and **Olive Ave**			**$21,000.00**
	11	**Perpendicular**	**NW**	**$7,000.00**
	13	**Perpendicular**	**SSW**	**$7,000.00**
	12	**Perpendicular**	**WSW**	**$7,000.00**

Total Cost for Street:	**S N St**		**$63,000.00**
Intersection ID and Street Names:	Type:	Orientation:	
804	**S N St** and **Seventh St**		**$21,000.00**
	51	**Curb Ramp Required**	**N**	**$7,000.00**
	50	**Perpendicular**	**SE**	**$7,000.00**
	52	**Perpendicular**	**SW**	**$7,000.00**
1272	**S N St** and **Sixth St**			**$28,000.00**
	83	**Perpendicular**	**NE**	**$7,000.00**
	84	**Perpendicular**	**NW**	**$7,000.00**
	82	**Perpendicular**	**SE**	**$7,000.00**
	81	**Perpendicular**	**SW**	**$7,000.00**
1273	**S N St** and **W Yosemite Ave**			**$14,000.00**
	108	**Perpendicular**	**NE**	**$0.00**
	111	**Combination**	**NW**	**$0.00**
	109	**Combination**	**SE**	**$7,000.00**
	110	**Combination**	**SW**	**$7,000.00**

Total Cost for Street:	**S O St**		**$7,000.00**
Intersection ID and Street Names:	Type:	Orientation:	
1397	**S O St** and **W Yosemite Ave**		**$7,000.00**
	75	**Combination**	**E**	**$0.00**
	74	**Perpendicular**	**N**	**$0.00**
	76	**Combination**	**S**	**$3,500.00**
	73	**Combination**	**W**	**$3,500.00**

Total Cost for Street:	**S Park Dr**		**$0.00**
Intersection ID and Street Names:	Type:	Orientation:	
708	**S Park Dr** and **California Ave**		**$0.00**
	944	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	943	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	945	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

485	**S Park Dr** and **N J St**			**$0.00**
	965	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	966	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	967	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
17	**S Park Dr** and **Park Ln**			**$0.00**
	940	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	941	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	942	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: S Wolftrap St — $81,250.00

Intersection ID and Street Names:		Type:	Orientation:	
438	**S Wolftrap St** and **Capistrano Dr**			**$13,000.00**
	2598	**Perpendicular**	**NW**	**$3,000.00**
	2600	**Curb Ramp Required**	**SE**	**$7,000.00**
	2599	**Perpendicular**	**SW**	**$3,000.00**
436	**S Wolftrap St** and **Gamay Ave**			**$10,500.00**
	2596	**Curb Ramp Required**	**NE**	**$7,000.00**
	2595	**Perpendicular**	**NW**	**$500.00**
	2597	**Perpendicular**	**SW**	**$3,000.00**
519	**S Wolftrap St** and **Maple St**			**$16,750.00**
	1896	**Perpendicular**	**NE**	**$6,500.00**
	1897	**Perpendicular**	**NW**	**$3,250.00**
	1895	**Curb Ramp Required**	**S**	**$7,000.00**
521	**S Wolftrap St** and **Oak St**			**$20,000.00**
	1876	**Curb Ramp Required**	**N**	**$7,000.00**
	1878	**Perpendicular**	**SE**	**$6,500.00**
	1877	**Perpendicular**	**SW**	**$6,500.00**
520	**S Wolftrap St** and **Pluma St**			**$21,000.00**
	1874	**Curb Ramp Required**	**E**	**$7,000.00**
	1873	**Perpendicular**	**NW**	**$7,000.00**
	1875	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Saint Mary Ave — $9,000.00

Intersection ID and Street Names:		Type:	Orientation:	
1551	**Saint Mary Ave** and **Munras Ave**			**$2,500.00**
	2843	**Perpendicular**	**NW**	**$2,500.00**
	2844	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1552	**Saint Mary Ave** and **Stadium Rd**			**$6,500.00**
	2845	**Perpendicular**	**NE**	**$6,500.00**
	2846	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	2847	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Salvador Way			$36,500.00
Intersection ID and Street Names:	Type:	Orientation:	
336 Salvador Way and Josephine Ct			**$20,000.00**
2053	**Perpendicular**	**NE**	**$6,500.00**
2052	**Perpendicular**	**NW**	**$6,500.00**
2051	**Curb Ramp Required**	**S**	**$7,000.00**
1059 Salvador Way and La Jolla Way			**$16,500.00**
2054	**Curb Ramp Required**	**N**	**$7,000.00**
2055	**Perpendicular**	**SE**	**$3,000.00**
2056	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: San Andrea Ave			$13,500.00
Intersection ID and Street Names:	Type:	Orientation:	
1550 San Andrea Ave and Munras Ave			**$13,500.00**
2839	**Curb Ramp Required**	**NE**	**$7,000.00**
2838	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: San Angelo Ave			$12,000.00
Intersection ID and Street Names:	Type:	Orientation:	
320 San Angelo Ave and Munra Ave			**$12,000.00**
2827	**Perpendicular**	**NW**	**$2,500.00**
2829	**Curb Ramp Required**	**SE**	**$7,000.00**
2828	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: San Bruno Ave			$16,500.00
Intersection ID and Street Names:	Type:	Orientation:	
1501 San Bruno Ave and Raymond Thomas St			**$16,500.00**
3728	**Perpendicular**	**NE**	**$6,500.00**
3729	**Perpendicular**	**SE**	**$3,000.00**
3730	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: San Carlos Ave			$46,250.00
Intersection ID and Street Names:	Type:	Orientation:	
1598 San Carlos Ave and Lemon Ave			**$13,500.00**
3688	**Perpendicular**	**NW**	**$6,500.00**
3689	**Curb Ramp Required**	**SE**	**$7,000.00**
1599 San Carlos Ave and Tangerine Ave			**$10,000.00**
3695	**Curb Ramp Required**	**NW**	**$7,000.00**

	3694	**Perpendicular**	**SE**	**$3,000.00**
193	**San Carlos Ave** and **Valencia Ave**			**$22,750.00**
	3690	**Perpendicular**	**NE**	**$6,500.00**
	3693	**Perpendicular**	**NW**	**$3,250.00**
	3691	**Perpendicular**	**SE**	**$6,500.00**
	3692	**Perpendicular**	**SW**	**$6,500.00**
Total Cost for Street:	**San Diego Ave**			**$10,000.00**
Intersection ID and Street Names:		Type:	Orientation:	
1605	**San Diego Ave** and **Lemon Ave**			**$10,000.00**
	3775	**Curb Ramp Required**	**NE**	**$7,000.00**
	3774	**Perpendicular**	**SW**	**$3,000.00**
Total Cost for Street:	**San Gabriel Dr**			**$50,000.00**
Intersection ID and Street Names:		Type:	Orientation:	
596	**San Gabriel Dr** and **Linda Mesa Dr**			**$16,500.00**
	3456	**Curb Ramp Required**	**NE**	**$7,000.00**
	3455	**Perpendicular**	**NW**	**$6,500.00**
	3457	**Perpendicular**	**SW**	**$3,000.00**
597	**San Gabriel Dr** and **Mira Loma Way**			**$20,000.00**
	3458	**Perpendicular**	**NE**	**$6,500.00**
	3459	**Curb Ramp Required**	**NW**	**$7,000.00**
	3460	**Perpendicular**	**SE**	**$6,500.00**
1586	**San Gabriel Dr** and **Verde Mesa Way**			**$13,500.00**
	3454	**Curb Ramp Required**	**NE**	**$7,000.00**
	3453	**Perpendicular**	**SW**	**$6,500.00**
Total Cost for Street:	**San Jose Ave**			**$60,500.00**
Intersection ID and Street Names:		Type:	Orientation:	
340	**San Jose Ave** and **Citrus Way**			**$16,000.00**
	3703	**Curb Ramp Required**	**NW**	**$7,000.00**
	3704	**Perpendicular**	**SE**	**$6,500.00**
	3702	**Perpendicular**	**SW**	**$2,500.00**
1600	**San Jose Ave** and **Lemon Ave**			**$13,500.00**
	3710	**Curb Ramp Required**	**NE**	**$7,000.00**
	3709	**Perpendicular**	**SW**	**$6,500.00**
339	**San Jose Ave** and **Tangerine Ave**			**$12,500.00**
	3696	**Perpendicular**	**NE**	**$2,500.00**
	3698	**Curb Ramp Required**	**NW**	**$7,000.00**
	3697	**Perpendicular**	**SE**	**$3,000.00**

342 San Jose Ave and **Valencia Ave** **$18,500.00**

3707	**Perpendicular**	**NE**	**$3,000.00**
3706	**Perpendicular**	**NW**	**$2,500.00**
3708	**Perpendicular**	**SE**	**$6,500.00**
3705	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: San Juan Dr **$21,000.00**

Intersection ID and Street Names: Type: Orientation:

616 San Juan Dr and **Asilomar Dr** **$21,000.00**

1794	**Perpendicular**	**NE**	**$7,000.00**
1796	**Perpendicular**	**SE**	**$7,000.00**
1795	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: San Pietro Dr **$23,500.00**

Intersection ID and Street Names: Type: Orientation:

70 San Pietro Dr and **Fairfield Way** **$10,000.00**

2333	**Perpendicular**	**NE**	**$500.00**
2335	**Curb Ramp Required**	**NW**	**$7,000.00**
2334	**Perpendicular**	**SE**	**$2,500.00**

1522 San Pietro Dr and **Running Brook Dr** **$13,500.00**

2332	**Curb Ramp Required**	**NE**	**$7,000.00**
2331	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: San Ramon Ave **$10,000.00**

Intersection ID and Street Names: Type: Orientation:

1601 San Ramon Ave and **Lemon Ave** **$10,000.00**

3711	**Perpendicular**	**NW**	**$3,000.00**
3712	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: San Sebastian Way **$13,500.00**

Intersection ID and Street Names: Type: Orientation:

1457 San Sebastian Way and **Toledo Way** **$13,500.00**

2176	**Perpendicular**	**NE**	**$3,250.00**
2177	**Perpendicular**	**SE**	**$3,250.00**
2175	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Sanarita Way **$57,250.00**

Intersection ID and Street Names: Type: Orientation:

307 Sanarita Way and **Dominguez Dr** **$19,250.00**

	2013	**Perpendicular**	**NE**	**$3,000.00**
	2014	**Perpendicular**	**NW**	**$6,500.00**
	2012	**Perpendicular**	**SE**	**$6,500.00**
	2015	**Perpendicular**	**SW**	**$3,250.00**
309 Sanarita Way and **Jericho Dr**				**$22,750.00**
	2009	**Perpendicular**	**NE**	**$6,500.00**
	2010	**Perpendicular**	**NW**	**$6,500.00**
	2008	**Perpendicular**	**SE**	**$6,500.00**
	2011	**Perpendicular**	**SW**	**$3,250.00**
308 Sanarita Way and **Jesse Dr**				**$15,250.00**
	2090	**Perpendicular**	**NE**	**$3,250.00**
	2091	**Perpendicular**	**NW**	**$3,000.00**
	2093	**Perpendicular**	**SE**	**$2,500.00**
	2092	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Santa Bonita St **$23,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1509 Santa Bonita St and **Deerwood Ct**			**$6,500.00**
326	**Perpendicular**	**NE**	**$3,250.00**
327	**Perpendicular**	**SW**	**$3,250.00**
1150 Santa Bonita St and **Gamay St**			**$13,500.00**
320	**Curb Ramp Required**	**E**	**$7,000.00**
321	**Perpendicular**	**NW**	**$3,250.00**
322	**Perpendicular**	**SW**	**$3,250.00**
1435 Santa Bonita St and **Maple St**			**$3,250.00**
372	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
373	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
371	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
374	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Santa Clara St **$36,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1507 Santa Clara St and **323 Santa Clara St**			**$3,250.00**
315	**Perpendicular**	**SE**	**$3,250.00**
1025 Santa Clara St and **Gamay St**			**$20,000.00**
314	**Perpendicular**	**NE**	**$6,500.00**
313	**Perpendicular**	**NW**	**$6,500.00**
312	**Curb Ramp Required**	**S**	**$7,000.00**
1026 Santa Clara St and **Santa Cruz St**			**$13,250.00**
318	**Perpendicular**	**NE**	**$3,000.00**
317	**Perpendicular**	**NW**	**$3,250.00**
316	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Santa Lucia Dr			$63,000.00
Intersection ID and Street Names:	Type:	Orientation:	
577 Santa Lucia Dr and Marina Dr			**$21,000.00**
1786	**Curb Ramp Required**	**E**	**$7,000.00**
1785	**Perpendicular**	**NW**	**$7,000.00**
1787	**Perpendicular**	**SW**	**$7,000.00**
576 Santa Lucia Dr and San Juan Dr			**$21,000.00**
1776	**Curb Ramp Required**	**E**	**$7,000.00**
1777	**Perpendicular**	**NW**	**$7,000.00**
1778	**Perpendicular**	**SW**	**$7,000.00**
578 Santa Lucia Dr and Seaside Dr			**$21,000.00**
1783	**Curb Ramp Required**	**E**	**$7,000.00**
1782	**Perpendicular**	**NW**	**$7,000.00**
1784	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Sassafras Dr			$0.00
Intersection ID and Street Names:	Type:	Orientation:	
1120 Sassafras Dr and Lansing St			**$0.00**
1719	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1721	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1720	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Saunders Ave			$13,500.00
Intersection ID and Street Names:	Type:	Orientation:	
1560 Saunders Ave and Lemon Ave			**$13,500.00**
2986	**Curb Ramp Required**	**SE**	**$7,000.00**
2985	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Sauret St			$20,000.00
Intersection ID and Street Names:	Type:	Orientation:	
313 Sauret St and Peerless St			**$20,000.00**
3122	**Perpendicular**	**NE**	**$6,500.00**
3121	**Perpendicular**	**NW**	**$6,500.00**
3123	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Scarlet Dr			$21,000.00
Intersection ID and Street Names:	Type:	Orientation:	
533 Scarlet Dr and Crimson Way			**$21,000.00**

4426	**Curb Ramp Required**	**N**	**$7,000.00**
4425	**Perpendicular**	**SE**	**$7,000.00**
4427	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Schnoor Ave $50,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1178 Schnoor Ave and **Fifth St**			**$9,750.00**
601	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
602	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
604	**Perpendicular**	**SSW**	**$6,500.00**
603	**Perpendicular**	**SW**	**$3,250.00**
760 Schnoor Ave and **Industrial Ave**			**$14,000.00**
1924	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1926	**Perpendicular**	**NW**	**$7,000.00**
1925	**Parallel**	**SW**	**$7,000.00**
887 Schnoor Ave and **Julius Ave**			**$0.00**
551	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
550	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
549	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1220 Schnoor Ave and **Modoc St**			**$20,500.00**
2627	**Perpendicular**	**NE**	**$6,500.00**
2628	**Parallel**	**NW**	**$7,000.00**
2626	**Parallel**	**SE**	**$7,000.00**
761 Schnoor Ave and **Plumas St**			**$0.00**
1928	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1929	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1927	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
843 Schnoor Ave and **Third St**			**$6,250.00**
546	**Parallel**	**NE**	**$3,000.00**
547	**Perpendicular**	**NW**	**$3,250.00**
545	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
548	**Perpendicular**	**SW**	**$0.00**

Total Cost for Street: Seahorse Ct $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
160 Seahorse Ct and **Shannon Ave**			**$20,000.00**
692	**Perpendicular**	**NE**	**$6,500.00**
694	**Perpendicular**	**SE**	**$6,500.00**
693	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Seaside Dr — $14,500.00

Intersection ID and Street Names:	Type:	Orientation:	
677 Seaside Dr and Asilomar Dr			**$14,500.00**
1800	**Perpendicular**	**NE**	**$7,000.00**
1801	**Perpendicular**	**SE**	**$500.00**
1802	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Segovia Ct — $74,000.00

Intersection ID and Street Names:	Type:	Orientation:	
449 Segovia Ct and Alicante Way			**$20,000.00**
2156	**Curb Ramp Required**	**N**	**$7,000.00**
2158	**Perpendicular**	**SE**	**$6,500.00**
2157	**Perpendicular**	**SW**	**$6,500.00**
446 Segovia Ct and Barcelona Way			**$10,250.00**
2154	**Curb Ramp Required**	**NW**	**$7,000.00**
2155	**Perpendicular**	**SE**	**$3,250.00**
447 Segovia Ct and San Sebastian Way			**$13,500.00**
2162	**Curb Ramp Required**	**N**	**$7,000.00**
2164	**Perpendicular**	**SE**	**$3,250.00**
2163	**Perpendicular**	**SW**	**$3,250.00**
1459 Segovia Ct and Sevilla St			**$16,750.00**
2165	**Curb Ramp Required**	**N**	**$7,000.00**
2167	**Perpendicular**	**SE**	**$6,500.00**
2166	**Perpendicular**	**SW**	**$3,250.00**
448 Segovia Ct and Toluca			**$13,500.00**
2159	**Curb Ramp Required**	**N**	**$7,000.00**
2161	**Perpendicular**	**SE**	**$3,250.00**
2160	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Seneca Dr — $9,000.00

Intersection ID and Street Names:	Type:	Orientation:	
967 Seneca Dr and Pecan Ave			**$9,000.00**
2866	**Perpendicular**	**NE**	**$2,500.00**
2865	**Perpendicular**	**NW**	**$6,500.00**
2867	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Seventh St — $66,250.00

Intersection ID and Street Names:	Type:	Orientation:

1354	**Seventh St** and **S J St**			**$28,000.00**
	141	**Combination**	**E**	**$7,000.00**
	144	**Combination**	**N**	**$7,000.00**
	142	**Combination**	**S**	**$7,000.00**
	143	**Combination**	**W**	**$7,000.00**
1353	**Seventh St** and **S K St**			**$28,000.00**
	125	**Perpendicular**	**E**	**$7,000.00**
	126	**Perpendicular**	**N**	**$7,000.00**
	124	**Perpendicular**	**S**	**$7,000.00**
	123	**Perpendicular**	**W**	**$7,000.00**
897	**Seventh St** and **S O St**			**$10,250.00**
	49	**Perpendicular**	**N**	**$7,000.00**
	48	**Perpendicular**	**S**	**$3,250.00**

Total Cost for Street: Shannon Ave **$35,250.00**

Intersection ID and Street Names:		Type:	Orientation:	
782	**Shannon Ave** and **Driftwood Dr**			**$20,500.00**
	624	**Curb Ramp Required**	**E**	**$7,000.00**
	625	**Perpendicular**	**N**	**$7,000.00**
	626	**Perpendicular**	**S**	**$6,500.00**
816	**Shannon Ave** and **National Ave**			**$0.00**
	563	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	564	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
	562	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
108	**Shannon Ave** and **Sunset Ave**			**$14,750.00**
	673	**Perpendicular**	**NE**	**$3,250.00**
	674	**Perpendicular**	**NW**	**$6,500.00**
	672	**Perpendicular**	**SE**	**$2,500.00**
	671	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Sharon Bvd **$112,000.00**

Intersection ID and Street Names:		Type:	Orientation:	
1495	**Sharon Bvd** and **Adell St**			**$0.00**
	3855	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	3854	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	3856	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
27	**Sharon Bvd** and **Cardwell St**			**$0.00**
	3857	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	3859	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
	3858	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1092	**Sharon Bvd** and **E Lincoln Ave**			**$20,500.00**

1191	**Parallel**	**NE**	**$7,000.00**
1190	**Perpendicular**	**SE**	**$6,500.00**
1189	**Curb Ramp Required**	**SW**	**$7,000.00**
747 Sharon Bvd and Harding Ave			**$17,250.00**
1200	**Parallel**	**NE**	**$7,000.00**
1199	**Perpendicular**	**SE**	**$3,250.00**
1198	**Curb Ramp Required**	**SW**	**$7,000.00**
1091 Sharon Bvd and Owens St			**$17,000.00**
1194	**Perpendicular**	**NE**	**$3,000.00**
1193	**Parallel**	**SE**	**$7,000.00**
1192	**Curb Ramp Required**	**SW**	**$7,000.00**
754 Sharon Bvd and Sonora St			**$19,500.00**
1168	**Perpendicular**	**NE**	**$6,500.00**
1169	**Perpendicular**	**NW**	**$6,500.00**
1167	**Perpendicular**	**SE**	**$6,500.00**
25 Sharon Bvd and W Clark St			**$0.00**
3860	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3861	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3862	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
753 Sharon Bvd and W South St			**$17,250.00**
1179	**Perpendicular**	**NE**	**$3,250.00**
1178	**Parallel**	**SE**	**$7,000.00**
1177	**Curb Ramp Required**	**W**	**$7,000.00**
746 Sharon Bvd and Wilson Ave			**$20,500.00**
1203	**Parallel**	**NE**	**$7,000.00**
1202	**Perpendicular**	**SE**	**$6,500.00**
1201	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Shelly Cove **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
357 Shelly Cove and Pamela Dr			**$20,000.00**
2374	**Perpendicular**	**NE**	**$6,500.00**
2373	**Perpendicular**	**NW**	**$6,500.00**
2372	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Shoreside Dr **$5,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
142 Shoreside Dr and Running Brook Dr			**$5,750.00**
2327	**Driveway**	**NW**	**$0.00**
2325	**Perpendicular**	**SE**	**$3,250.00**
2326	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Sierra St — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1075 Sierra St and E Lincoln Ave			**$15,750.00**
1145	**Perpendicular**	**NE**	**$3,250.00**
1146	**Perpendicular**	**NW**	**$3,000.00**
1148	**Perpendicular**	**SE**	**$6,500.00**
1147	**Perpendicular**	**SW**	**$3,000.00**
1074 Sierra St and E Rush St			**$0.00**
1142	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1141	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1143	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1144	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
683 Sierra St and Green Way			**$10,250.00**
1224	**Curb Ramp Required**	**N**	**$7,000.00**
1225	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1226	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Sixth St — $187,250.00

Intersection ID and Street Names:	Type:	Orientation:	
987 Sixth St and S G St			**$10,250.00**
1113	**Perpendicular**	**E**	**$3,250.00**
1112	**Perpendicular**	**N**	**$6,500.00**
1114	**Perpendicular**	**S**	**$500.00**
1389 Sixth St and S H St			**$24,000.00**
1105	**Perpendicular**	**E**	**$7,000.00**
1102	**Perpendicular**	**N**	**$7,000.00**
1104	**Parallel**	**S**	**$7,000.00**
1103	**Parallel**	**W**	**$3,000.00**
837 Sixth St and S I St			**$28,000.00**
158	**Perpendicular**	**E**	**$7,000.00**
157	**Combination**	**N**	**$7,000.00**
159	**Combination**	**S**	**$7,000.00**
160	**Combination**	**W**	**$7,000.00**
1365 Sixth St and S J St			**$28,000.00**
145	**Combination**	**E**	**$7,000.00**
148	**Combination**	**N**	**$7,000.00**
146	**Combination**	**S**	**$7,000.00**
147	**Combination**	**W**	**$7,000.00**
1366 Sixth St and S K St			**$28,000.00**
94	**Combination**	**NE**	**$7,000.00**
95	**Combination**	**NW**	**$7,000.00**

93	**Combination**	**SE**	**$7,000.00**
92	**Combination**	**SW**	**$7,000.00**
978 Sixth St and **S M St**			**$20,500.00**
86	**Perpendicular**	**NE**	**$7,000.00**
85	**Perpendicular**	**NW**	**$7,000.00**
87	**Perpendicular**	**SE**	**$6,500.00**
1340 Sixth St and **S O St**			**$28,000.00**
78	**Combination**	**NE**	**$7,000.00**
77	**Combination**	**NW**	**$7,000.00**
79	**Combination**	**SE**	**$7,000.00**
80	**Perpendicular**	**SW**	**$7,000.00**
1408 Sixth St and **S P St**			**$20,500.00**
67	**Perpendicular**	**NE**	**$6,500.00**
66	**Perpendicular**	**NW**	**$7,000.00**
68	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Solano St **$58,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
56 Solano St and **Carmel St**			**$16,500.00**
3161	**Perpendicular**	**NE**	**$3,000.00**
3162	**Perpendicular**	**SE**	**$6,500.00**
3163	**Curb Ramp Required**	**SW**	**$7,000.00**
54 Solano St and **Los Arcos Ln**			**$13,000.00**
3151	**Perpendicular**	**NE**	**$6,500.00**
3152	**Perpendicular**	**NW**	**$6,500.00**
3153	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
58 Solano St and **Milow St**			**$12,500.00**
3156	**Perpendicular**	**NE**	**$3,000.00**
3154	**Perpendicular**	**SE**	**$2,500.00**
3155	**Curb Ramp Required**	**SW**	**$7,000.00**
55 Solano St and **Sauret St**			**$16,500.00**
3118	**Perpendicular**	**NE**	**$3,000.00**
3119	**Perpendicular**	**SE**	**$6,500.00**
3120	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Sonora St **$41,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
672 Sonora St and **Ashlan Way**			**$21,000.00**
3913	**Perpendicular**	**NE**	**$7,000.00**
3911	**Perpendicular**	**SE**	**$7,000.00**
3912	**Curb Ramp Required**	**W**	**$7,000.00**

749	**Sonora St** and **E Rush St**			**$20,000.00**
	1136	**Perpendicular**	**NE**	**$7,000.00**
	1135	**Perpendicular**	**NW**	**$6,500.00**
	1133	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	1134	**Perpendicular**	**SW**	**$6,500.00**
673	**Sonora St** and **Green Way**			**$0.00**
	1230	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	1231	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	1232	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Soquel Ct **$16,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
905	**Soquel Ct** and **Sawmill St**		**$16,000.00**
3367	**Perpendicular**	**E**	**$2,500.00**
3368	**Perpendicular**	**S**	**$6,500.00**
3369	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Sparrow Way **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
159	**Sparrow Way** and **Meadow Lark Way**		**$0.00**
2117	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
2118	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2119	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Spring Ave **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1061	**Spring Ave** and **Winter Way**		**$0.00**
1759	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1761	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1760	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: St 4Th **$20,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1433	**St 4Th** and **N C St**		**$20,250.00**
4384	**Perpendicular**	**E**	**$3,250.00**
4387	**Parallel**	**N**	**$3,000.00**
4385	**Parallel**	**S**	**$7,000.00**
4386	**Parallel**	**W**	**$7,000.00**

Total Cost for Street: St Julien Dr — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
373 St Julien Dr and Goosecross Dr			**$20,000.00**
225	**Curb Ramp Required**	**E**	**$7,000.00**
226	**Perpendicular**	**NW**	**$6,500.00**
227	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: St Tropez Dr — $37,000.00

Intersection ID and Street Names:	Type:	Orientation:	
527 St Tropez Dr and Howard Rd			**$13,500.00**
1838	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1837	**Perpendicular**	**SE**	**$7,000.00**
1836	**Perpendicular**	**SW**	**$6,500.00**
440 St Tropez Dr and Plumas St			**$23,500.00**
1885	**Perpendicular**	**NE**	**$2,500.00**
1886	**Perpendicular**	**NW**	**$7,000.00**
1888	**Perpendicular**	**SE**	**$7,000.00**
1887	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: St. Michelle Dr — $23,250.00

Intersection ID and Street Names:	Type:	Orientation:	
518 St. Michelle Dr and Goosecross Dr			**$16,500.00**
222	**Curb Ramp Required**	**E**	**$7,000.00**
223	**Perpendicular**	**NW**	**$6,500.00**
224	**Perpendicular**	**SW**	**$3,000.00**
1505 St. Michelle Dr and Stadium Rd			**$6,750.00**
242	**Perpendicular**	**NE**	**$3,250.00**
243	**Parallel**	**NW**	**$500.00**
241	**Perpendicular**	**SE**	**$3,000.00**

Total Cost for Street: St. Montelena Dr — $22,750.00

Intersection ID and Street Names:	Type:	Orientation:	
668 St. Montelena Dr and Goosecross Dr			**$22,750.00**
219	**Perpendicular**	**NE**	**$6,500.00**
220	**Perpendicular**	**NW**	**$3,250.00**
218	**Perpendicular**	**SE**	**$6,500.00**
221	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Stadium Rd — $85,250.00

Intersection ID and Street Names:	Type:	Orientation:	
644 Stadium Rd and Crown Terrace			**$7,000.00**
309	**Curb Ramp Required**	**E**	**$7,000.00**
310	**Perpendicular**	**NW**	**$0.00**
311	**Perpendicular**	**SW**	**$0.00**
587 Stadium Rd and Deerwood Dr			**$6,250.00**
414	**Perpendicular**	**NE**	**$3,000.00**
413	**Perpendicular**	**SE**	**$3,250.00**
412	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
807 Stadium Rd and Olive Ave			**$20,500.00**
34	**Perpendicular**	**NE**	**$7,000.00**
33	**Perpendicular**	**NW**	**$6,500.00**
32	**Perpendicular**	**SW**	**$7,000.00**
1374 Stadium Rd and Pecan Ave			**$12,500.00**
2858	**No Sidewalk, Curb Ramp Not Required**	**ENE**	**$0.00**
2857	**No Sidewalk, Curb Ramp Not Required**	**NNE**	**$0.00**
2856	**Perpendicular**	**NW**	**$3,000.00**
2854	**Perpendicular**	**SE**	**$6,500.00**
2855	**Perpendicular**	**SW**	**$3,000.00**
235 Stadium Rd and San Andrea Ave			**$13,000.00**
2835	**Perpendicular**	**NE**	**$6,500.00**
2836	**Perpendicular**	**SE**	**$6,500.00**
2837	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
233 Stadium Rd and San Angelo Ave			**$13,000.00**
2853	**Perpendicular**	**NE**	**$6,500.00**
2851	**Perpendicular**	**SE**	**$6,500.00**
2852	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
234 Stadium Rd and San Marco Ave			**$13,000.00**
2848	**Perpendicular**	**NE**	**$6,500.00**
2849	**Perpendicular**	**SE**	**$6,500.00**
2850	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Stanford Ave — $36,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1597 Stanford Ave and Lemon Ave			**$13,500.00**
3687	**Curb Ramp Required**	**NE**	**$7,000.00**
3686	**Perpendicular**	**SW**	**$6,500.00**
296 Stanford Ave and Valencia Ave			**$22,500.00**
3681	**Perpendicular**	**NE**	**$6,500.00**

3682	Perpendicular	NW	$6,500.00
3680	Perpendicular	SE	$6,500.00
3683	Perpendicular	SW	$3,000.00

Total Cost for Street: Stephanie Ln — $45,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1526 Stephanie Ln and			**$13,000.00**
2501	Perpendicular	NE	$6,500.00
2502	No Sidewalk, Curb Ramp Not Required	NW	$0.00
2500	Perpendicular	SE	$6,500.00
1525 Stephanie Ln and 2360 Stephanie Ln			**$13,000.00**
2499	Perpendicular	NE	$6,500.00
2497	Perpendicular	SE	$6,500.00
2498	No Sidewalk, Curb Ramp Not Required	SW	$0.00
1413 Stephanie Ln and Frederick Way			**$19,000.00**
2493	Perpendicular	NE	$6,500.00
2492	Perpendicular	NW	$6,500.00
2490	Perpendicular	SE	$3,000.00
2491	Perpendicular	SW	$3,000.00

Total Cost for Street: Steven Lane — $75,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1481 Steven Lane and Glade Ave			**$16,500.00**
2408	Curb Ramp Required	NE	$7,000.00
2407	Perpendicular	SE	$3,000.00
2409	Perpendicular	SW	$6,500.00
131 Steven Lane and Kimberly Dr			**$20,000.00**
2414	Perpendicular	NE	$6,500.00
2413	Curb Ramp Required	NW	$7,000.00
2415	Perpendicular	SE	$6,500.00
130 Steven Lane and Marie Dr			**$16,500.00**
2411	Perpendicular	NE	$3,000.00
2412	Perpendicular	SE	$6,500.00
2410	Curb Ramp Required	SW	$7,000.00
842 Steven Lane and Pamela Dr			**$22,000.00**
2366	Perpendicular	NE	$6,500.00
2365	Perpendicular	NW	$6,500.00
2367	Perpendicular	SE	$6,500.00
2364	Perpendicular	SW	$2,500.00

Total Cost for Street: Strauss Ct — $14,000.00

Intersection ID and Street Names:	Type:	Orientation:	
566 Strauss Ct and Strauss Ct			**$14,000.00**
2905	**Curb Ramp Required**	**NW**	**$7,000.00**
2904	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Suburban Ave — $53,500.00

Intersection ID and Street Names:	Type:	Orientation:	
784 Suburban Ave and Boulder Ave			**$20,500.00**
1492	**Perpendicular**	**NE**	**$6,500.00**
1493	**Perpendicular**	**SE**	**$7,000.00**
1491	**Curb Ramp Required**	**W**	**$7,000.00**
928 Suburban Ave and Riverview Dr			**$13,000.00**
1481	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1482	**Perpendicular**	**SE**	**$6,500.00**
1483	**Perpendicular**	**SW**	**$6,500.00**
929 Suburban Ave and Tragon St			**$20,000.00**
1485	**Perpendicular**	**NE**	**$6,500.00**
1486	**Perpendicular**	**SE**	**$6,500.00**
1484	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Summer Ln — $34,500.00

Intersection ID and Street Names:	Type:	Orientation:	
491 Summer Ln and Double Tree Way			**$13,500.00**
1846	**Under Construction**	**NE**	**$0.00**
1845	**Under Construction**	**NW**	**$0.00**
1848	**Perpendicular**	**SE**	**$7,000.00**
1847	**Perpendicular**	**SW**	**$6,500.00**
492 Summer Ln and Timberline Dr			**$21,000.00**
1858	**Perpendicular**	**NE**	**$7,000.00**
1859	**Perpendicular**	**SE**	**$7,000.00**
1860	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Summer Set Ln — $35,000.00

Intersection ID and Street Names:	Type:	Orientation:	
199 Summer Set Ln and Double Tree Way			**$14,000.00**
1398	**Perpendicular**	**NE**	**$7,000.00**
1397	**Curb Ramp Required**	**S**	**$7,000.00**

906 Summer Set Ln and **Trabon Way**				**$21,000.00**
	1401	**Perpendicular**	**NE**	**$7,000.00**
	1400	**Perpendicular**	**SE**	**$7,000.00**
	1399	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Sundance Ln **$76,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1010 Sundance Ln and **Beechwood Way**			**$16,750.00**
2483	**Perpendicular**	**NE**	**$6,500.00**
2481	**Curb Ramp Required**	**NW**	**$7,000.00**
2482	**Perpendicular**	**SE**	**$3,250.00**
915 Sundance Ln and **Grapewood Way**			**$20,000.00**
2485	**Perpendicular**	**NE**	**$6,500.00**
2486	**Curb Ramp Required**	**NW**	**$7,000.00**
2484	**Perpendicular**	**SE**	**$6,500.00**
1009 Sundance Ln and **Meadowrest Way**			**$20,000.00**
2479	**Perpendicular**	**NE**	**$6,500.00**
2478	**Perpendicular**	**SE**	**$6,500.00**
2480	**Curb Ramp Required**	**SW**	**$7,000.00**
1305 Sundance Ln and **National Ave**			**$0.00**
1654	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1653	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1656	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1655	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
914 Sundance Ln and **Plumwood Way**			**$20,000.00**
2488	**Perpendicular**	**NE**	**$6,500.00**
2489	**Curb Ramp Required**	**NW**	**$7,000.00**
2487	**Perpendicular**	**SE**	**$6,500.00**
797 Sundance Ln and **Sunnydale St**			**$0.00**
1671	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1670	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1669	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1376 Sundance Ln and **Third St**			**$0.00**
1705	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1706	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1708	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1707	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Sunnydale St **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
773 Sunnydale St and **Autumn Ct**			**$0.00**

1630	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1629	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1628	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
774 Sunnydale St and Sunnydale Ct			**$0.00**
1625	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1626	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1627	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

Total Cost for Street: Sunrise Ave $167,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1179 Sunrise Ave and 11Th St			**$16,750.00**
3343	**Perpendicular**	**NE**	**$3,250.00**
3345	**Perpendicular**	**NW**	**$6,500.00**
3344	**Curb Ramp Required**	**SE**	**$7,000.00**
3346	**Driveway**	**SW**	**$0.00**
810 Sunrise Ave and Adelaide Ave			**$26,500.00**
3323	**Perpendicular**	**ENE**	**$6,500.00**
3324	**Perpendicular**	**NNE**	**$6,500.00**
3325	**Perpendicular**	**NW**	**$6,500.00**
3326	**Curb Ramp Required**	**SW**	**$7,000.00**
1578 Sunrise Ave and Drysdale Way			**$16,000.00**
3288	**Perpendicular**	**NE**	**$6,500.00**
3289	**Perpendicular**	**NW**	**$2,500.00**
3287	**Curb Ramp Required**	**SE**	**$7,000.00**
1186 Sunrise Ave and Knox Ave			**$13,500.00**
3321	**Perpendicular**	**NE**	**$7,000.00**
3320	**Perpendicular**	**SE**	**$3,250.00**
3322	**Perpendicular**	**SW**	**$3,250.00**
954 Sunrise Ave and Lake St			**$13,250.00**
3339	**Curb Ramp Required**	**NW**	**$7,000.00**
3337	**Perpendicular**	**SE**	**$3,000.00**
3338	**Perpendicular**	**SW**	**$3,250.00**
864 Sunrise Ave and Lilly St			**$9,500.00**
3303	**Perpendicular**	**NE**	**$3,000.00**
3304	**Perpendicular**	**SE**	**$0.00**
3305	**Perpendicular**	**SW**	**$6,500.00**
721 Sunrise Ave and S Lake St			**$40,500.00**
4280	**Curb Ramp Required**	**N**	**$7,000.00**
4277	**Perpendicular**	**NE**	**$7,000.00**
4278	**Perpendicular**	**NW**	**$2,500.00**
4281	**Perpendicular**	**SE**	**$10,000.00**
4282	**Perpendicular**	**SW**	**$14,000.00**
811 Sunrise Ave and Stinson Ave			**$13,250.00**

3329	**Curb Ramp Required**	**NW**	**$7,000.00**
3327	**Perpendicular**	**SE**	**$3,250.00**
3328	**Perpendicular**	**SW**	**$3,000.00**
146 Sunrise Ave and Tozer St			**$4,500.00**
3284	**Pedestrian Pad**	**NE**	**$2,500.00**
3286	**Pedestrian Pad Required**	**NW**	**$2,000.00**
3283	**Perpendicular**	**SE**	**$0.00**
3285	**Perpendicular**	**SW**	**$0.00**
1043 Sunrise Ave and Vineyard Ave			**$13,250.00**
3333	**Perpendicular**	**ENE**	**$3,000.00**
3334	**Driveway**	**NNE**	**$0.00**
3336	**Perpendicular**	**NW**	**$3,250.00**
3335	**Curb Ramp Required**	**SE**	**$7,000.00**

Total Cost for Street: Sunset Ave $271,500.00

Intersection ID and Street Names:	Type:	Orientation:	
949 Sunset Ave and Accornero Ave			**$13,500.00**
813	**Curb Ramp Required**	**N**	**$7,000.00**
814	**Perpendicular**	**SE**	**$6,500.00**
815	**Perpendicular**	**SW**	**$0.00**
1395 Sunset Ave and Double Tree Way			**$26,500.00**
1512	**Perpendicular**	**NE**	**$6,500.00**
1513	**Perpendicular**	**NW**	**$6,500.00**
1515	**Perpendicular**	**SE**	**$7,000.00**
1514	**Perpendicular**	**SW**	**$6,500.00**
886 Sunset Ave and El Rancho Dr			**$14,000.00**
800	**Perpendicular**	**NE**	**$0.00**
801	**Perpendicular**	**NW**	**$7,000.00**
802	**Curb Ramp Required**	**S**	**$7,000.00**
935 Sunset Ave and Foster Ave			**$10,500.00**
919	**Parallel**	**NE**	**$3,500.00**
920	**Perpendicular**	**NW**	**$7,000.00**
896 Sunset Ave and Liberty Ln			**$16,750.00**
1386	**Perpendicular**	**E**	**$3,250.00**
1385	**Perpendicular**	**NW**	**$6,500.00**
1384	**Perpendicular**	**SW**	**$7,000.00**
316 Sunset Ave and Mainberry Dr			**$16,500.00**
657	**Perpendicular**	**NE**	**$7,000.00**
656	**Perpendicular**	**NW**	**$6,500.00**
658	**Perpendicular**	**SE**	**$3,000.00**
659	**Perpendicular**	**SW**	**$0.00**
1027 Sunset Ave and N Granada Dr			**$20,000.00**
1620	**Perpendicular**	**NE**	**$6,500.00**

1619	**Perpendicular**	**NW**	**$6,500.00**
1621	**Perpendicular**	**SE**	**$0.00**
1618	**Perpendicular**	**SW**	**$7,000.00**
885 Sunset Ave and N Schnoor Ave			**$28,000.00**
790	**Parallel**	**NE**	**$7,000.00**
791	**Parallel**	**NW**	**$7,000.00**
793	**Parallel**	**SE**	**$7,000.00**
792	**Parallel**	**SW**	**$7,000.00**
1326 Sunset Ave and Orchard Ave			**$3,250.00**
809	**Perpendicular**	**NE**	**$0.00**
810	**Perpendicular**	**NW**	**$0.00**
811	**Perpendicular**	**SE**	**$3,250.00**
812	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
934 Sunset Ave and Park Ln			**$17,500.00**
969	**Parallel**	**NE**	**$3,500.00**
970	**Perpendicular**	**SE**	**$7,000.00**
968	**Curb Ramp Required**	**W**	**$7,000.00**
948 Sunset Ave and Paul Ave			**$0.00**
797	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
798	**Perpendicular**	**SE**	**$0.00**
799	**Perpendicular**	**SW**	**$0.00**
944 Sunset Ave and Pine St			**$8,000.00**
916	**Island-Cut Through**	**N**	**$500.00**
915	**Parallel**	**NW**	**$500.00**
913	**Perpendicular**	**SE**	**$7,000.00**
914	**Perpendicular**	**SW**	**$0.00**
315 Sunset Ave and Sundance Ln			**$22,000.00**
1673	**Perpendicular**	**NE**	**$6,500.00**
1674	**Perpendicular**	**NW**	**$6,500.00**
1672	**Perpendicular**	**SE**	**$2,500.00**
1675	**Perpendicular**	**SW**	**$6,500.00**
220 Sunset Ave and Sunset Ave			**$14,000.00**
1003	**Curb Ramp Required**	**E**	**$7,000.00**
1002	**Curb Ramp Required**	**W**	**$7,000.00**
927 Sunset Ave and W 4Th St			**$17,250.00**
990	**Perpendicular**	**E**	**$3,250.00**
989	**Curb Ramp Required**	**N**	**$7,000.00**
988	**Perpendicular**	**S**	**$7,000.00**
1328 Sunset Ave and Westberry Dr			**$26,500.00**
1437	**Perpendicular**	**NE**	**$6,500.00**
1438	**Perpendicular**	**NW**	**$6,500.00**
1440	**Perpendicular**	**SE**	**$7,000.00**
1439	**Perpendicular**	**SW**	**$6,500.00**

1312 Sunset Ave and **Williams Ave**				**$7,000.00**
	819	**Perpendicular**	**NE**	**$0.00**
	818	**Perpendicular**	**NW**	**$0.00**
	817	**Perpendicular**	**SE**	**$7,000.00**
	816	**Perpendicular**	**SW**	**$0.00**
1313 Sunset Ave and **Willis Ave**				**$10,250.00**
	821	**Perpendicular**	**NE**	**$3,250.00**
	820	**Perpendicular**	**NW**	**$0.00**
	822	**Perpendicular**	**SE**	**$0.00**
	823	**Combination**	**SW**	**$7,000.00**

Total Cost for Street: Susan Ln — $20,500.00

Intersection ID and Street Names:		Type:	Orientation:	
34 Susan Ln and **Sonora St**				**$20,500.00**
	3888	**Curb Ramp Required**	**E**	**$7,000.00**
	3886	**Perpendicular**	**NW**	**$7,000.00**
	3887	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Taft Dr — $13,000.00

Intersection ID and Street Names:		Type:	Orientation:	
1487 Taft Dr and				**$13,000.00**
	1975	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	1976	**Perpendicular**	**NW**	**$6,500.00**
	1977	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Tangerine Ave — $62,000.00

Intersection ID and Street Names:		Type:	Orientation:	
1466 Tangerine Ave and **Citrus Way**				**$16,000.00**
	3701	**Perpendicular**	**E**	**$6,500.00**
	3699	**Perpendicular**	**N**	**$2,500.00**
	3700	**Curb Ramp Required**	**W**	**$7,000.00**
1470 Tangerine Ave and **Mango Ave**				**$7,000.00**
	3742	**Curb Ramp Required**	**SW**	**$7,000.00**
538 Tangerine Ave and **Parkwood Ave**				**$14,000.00**
	2998	**Perpendicular**	**NE**	**$2,500.00**
	3001	**Perpendicular**	**NW**	**$6,500.00**
	2999	**Perpendicular**	**SE**	**$2,500.00**
	3000	**Perpendicular**	**SW**	**$2,500.00**
1596 Tangerine Ave and **Stanford Ave**				**$13,500.00**
	3684	**Perpendicular**	**NE**	**$6,500.00**
	3685	**Curb Ramp Required**	**SW**	**$7,000.00**

617 Tangerine Ave and **Valencia Ave**				**$11,500.00**
	3716	**Perpendicular**	**E**	**$2,500.00**
	3717	**Perpendicular**	**N**	**$2,500.00**
	3719	**Perpendicular**	**S**	**$3,250.00**
	3718	**Perpendicular**	**W**	**$3,250.00**

Total Cost for Street: Terrace Pl **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1250 Terrace Pl and **W Central Ave**			**$0.00**
1020	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
1019	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1021	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Third St **$0.00**

Intersection ID and Street Names:	Type:	Orientation:	
1344 Third St and **Hilton St**			**$0.00**
588	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
587	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
589	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
586	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1345 Third St and **Krest St**			**$0.00**
585	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
584	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
582	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
583	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
424 Third St and **Shannon Ave**			**$0.00**
571	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
568	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
570	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
569	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Tiburon Way **$36,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
432 Tiburon Way and **Fairfield Way**			**$16,000.00**
2346	**Curb Ramp Required**	**NW**	**$7,000.00**
2348	**Perpendicular**	**SE**	**$6,500.00**
2347	**Perpendicular**	**SW**	**$2,500.00**
431 Tiburon Way and **Hampton Dr**			**$20,000.00**
1681	**Perpendicular**	**NE**	**$6,500.00**
1680	**Perpendicular**	**NW**	**$6,500.00**
1679	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Timberline Dr — $74,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1140 Timberline Dr and Cedar Creek Ln			**$21,000.00**
1536	**Perpendicular**	**NE**	**$7,000.00**
1537	**Perpendicular**	**SE**	**$7,000.00**
1535	**Curb Ramp Required**	**W**	**$7,000.00**
1244 Timberline Dr and Ren Way			**$16,500.00**
1865	**Curb Ramp Required**	**E**	**$7,000.00**
1864	**Perpendicular**	**NW**	**$3,000.00**
1866	**Perpendicular**	**SW**	**$6,500.00**
624 Timberline Dr and Westgate Dr			**$20,500.00**
1688	**Curb Ramp Required**	**E**	**$7,000.00**
1689	**Perpendicular**	**NW**	**$6,500.00**
1690	**Perpendicular**	**SW**	**$7,000.00**
1242 Timberline Dr and Winter Way			**$16,500.00**
1862	**Perpendicular**	**NE**	**$7,000.00**
1863	**Perpendicular**	**SE**	**$2,500.00**
1861	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Toledo Way — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1458 Toledo Way and			**$13,500.00**
2173	**Perpendicular**	**NE**	**$3,250.00**
2174	**Perpendicular**	**NW**	**$3,250.00**
2172	**Curb Ramp Required**	**S**	**$7,000.00**
1490 Toledo Way and Raymond Rd			**$6,500.00**
2169	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
2170	**Perpendicular**	**NW**	**$3,250.00**
2171	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Toronado Dr — $15,500.00

Intersection ID and Street Names:	Type:	Orientation:	
466 Toronado Dr and E Cleveland Ave			**$9,500.00**
1213	**Perpendicular**	**NE**	**$6,500.00**
1212	**Perpendicular**	**NW**	**$3,000.00**
465 Toronado Dr and W Sherwood Way			**$6,000.00**
1237	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1239	**Perpendicular**	**SE**	**$3,000.00**
1238	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Torres Way — $27,500.00

Intersection ID and Street Names:	Type:	Orientation:	
285 Torres Way and E Lincoln Ave			**$14,000.00**
1180	**Curb Ramp Required**	**N**	**$7,000.00**
1181	**Parallel**	**SE**	**$3,500.00**
1182	**Parallel**	**SW**	**$3,500.00**
284 Torres Way and W South St			**$13,500.00**
1175	**Perpendicular**	**NE**	**$3,000.00**
1176	**Parallel**	**NW**	**$3,500.00**
1174	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Toschi Dr — $67,500.00

Intersection ID and Street Names:	Type:	Orientation:	
592 Toschi Dr and Cherry Tree Dr			**$14,000.00**
2677	**Perpendicular**	**NE**	**$500.00**
2676	**Perpendicular**	**NW**	**$6,500.00**
2678	**Curb Ramp Required**	**SE**	**$7,000.00**
487 Toschi Dr and Pear Tree Dr			**$33,500.00**
2660	**Perpendicular**	**NE**	**$6,500.00**
2696	**Curb Ramp Required**	**NW**	**$13,500.00**
2695	**Perpendicular**	**SW**	**$13,500.00**
488 Toschi Dr and W Almond Ave			**$20,000.00**
2658	**Curb Ramp Required**	**NW**	**$7,000.00**
2659	**Perpendicular**	**SE**	**$6,500.00**
2657	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Tozer St — $26,250.00

Intersection ID and Street Names:	Type:	Orientation:	
348 Tozer St and Cedar St			**$0.00**
3591	**Driveway**	**E**	**$0.00**
1066 Tozer St and Lada Ave			**$16,500.00**
3589	**Perpendicular**	**NE**	**$3,000.00**
3590	**Curb Ramp Required**	**NW**	**$7,000.00**
3588	**Perpendicular**	**SE**	**$6,500.00**
350 Tozer St and Mira Loma Way			**$9,750.00**
3463	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3462	**Perpendicular**	**NW**	**$3,250.00**
3461	**Perpendicular**	**SW**	**$6,500.00**
349 Tozer St and Mono St			**$0.00**

3592	Driveway	E	$0.00

Total Cost for Street: Trabon Way — $20,500.00

Intersection ID and Street Names:	Type:	Orientation:	
790 Trabon Way and Double Tree Way			**$20,500.00**
1458	Perpendicular	NE	$6,500.00
1459	Perpendicular	NW	$7,000.00
1457	Curb Ramp Required	S	$7,000.00

Total Cost for Street: Trail Way — $26,000.00

Intersection ID and Street Names:	Type:	Orientation:	
137 Trail Way and Bridge Way			**$13,000.00**
3389	Perpendicular	NE	$3,000.00
3387	Perpendicular	SE	$3,000.00
3388	Curb Ramp Required	SW	$7,000.00
136 Trail Way and Rd 28			**$13,000.00**
3393	No Sidewalk, Curb Ramp Not Required	NE	$0.00
3390	Perpendicular	NW	$6,500.00
3392	No Sidewalk, Curb Ramp Not Required	SE	$0.00
3391	Perpendicular	SW	$6,500.00

Total Cost for Street: Trevor Way — $16,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1024 Trevor Way and Stephanie Ln			**$16,500.00**
2520	Perpendicular	NE	$6,500.00
2519	Perpendicular	NW	$3,000.00
2518	Curb Ramp Required	SW	$7,000.00

Total Cost for Street: Truman Dr — $23,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1514 Truman Dr and Pierce Ln			**$10,250.00**
1939	Perpendicular	NW	$3,250.00
1940	Curb Ramp Required	SE	$7,000.00
129 Truman Dr and Taft Dr			**$13,500.00**
1971	Perpendicular	NE	$3,250.00
1972	Perpendicular	SE	$3,250.00
1970	Curb Ramp Required	W	$7,000.00

Total Cost for Street: Tulare St — $88,000.00

Intersection ID and Street Names:	Type:	Orientation:	
427 Tulare St and Daulton Ave			**$7,000.00**
4095	**Curb Ramp Required**	**E**	**$7,000.00**
4094	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
164 Tulare St and E Clark St			**$20,500.00**
2229	**Curb Ramp Required**	**E**	**$7,000.00**
2231	**Perpendicular**	**NW**	**$7,000.00**
2230	**Perpendicular**	**SW**	**$6,500.00**
426 Tulare St and E Lincoln Ave			**$28,000.00**
4097	**Perpendicular**	**NE**	**$7,000.00**
4099	**Perpendicular**	**NW**	**$7,000.00**
4096	**Perpendicular**	**SE**	**$7,000.00**
4098	**Perpendicular**	**SW**	**$7,000.00**
238 Tulare St and E Sherwood Way			**$6,500.00**
2204	**Perpendicular**	**NE**	**$3,250.00**
2205	**Perpendicular**	**SE**	**$3,250.00**
2203	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
239 Tulare St and Mission Ave			**$0.00**
2208	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2207	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2206	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
536 Tulare St and Tulare St			**$13,000.00**
2220	**Perpendicular**	**NE**	**$6,500.00**
2219	**Perpendicular**	**SE**	**$6,500.00**
2218	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
163 Tulare St and Wrenwood Way			**$13,000.00**
2223	**Perpendicular**	**NE**	**$6,500.00**
2222	**Perpendicular**	**SE**	**$6,500.00**
2221	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Tyler Ln — $34,000.00

Intersection ID and Street Names:	Type:	Orientation:	
355 Tyler Ln and Coolidge St			**$13,500.00**
1985	**Perpendicular**	**NE**	**$3,250.00**
1986	**Perpendicular**	**NW**	**$3,250.00**
1984	**Curb Ramp Required**	**S**	**$7,000.00**
1518 Tyler Ln and Madison Dr			**$10,250.00**
1994	**Perpendicular**	**NE**	**$3,250.00**
1993	**Curb Ramp Required**	**SW**	**$7,000.00**

1517 Tyler Ln and **Truman Dr**				**$10,250.00**
	1974	**Perpendicular**	**NW**	**$3,250.00**
	1973	**Curb Ramp Required**	**SE**	**$7,000.00**
Total Cost for Street: Ula St				**$7,000.00**
Intersection ID and Street Names:		Type:	Orientation:	
1175 Ula St and **Foster Ave**				**$7,000.00**
	923	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	921	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
	922	**Curb Ramp Required**	**W**	**$7,000.00**
Total Cost for Street: University Ave				**$66,500.00**
Intersection ID and Street Names:		Type:	Orientation:	
1225 University Ave and **Hayes Ct**				**$20,000.00**
	747	**Curb Ramp Required**	**N**	**$7,000.00**
	748	**Perpendicular**	**SE**	**$6,500.00**
	749	**Perpendicular**	**SW**	**$6,500.00**
1377 University Ave and **Orchard Ave**				**$26,500.00**
	741	**Perpendicular**	**NE**	**$6,500.00**
	740	**Perpendicular**	**NW**	**$7,000.00**
	742	**Perpendicular**	**SE**	**$6,500.00**
	743	**Perpendicular**	**SW**	**$6,500.00**
998 University Ave and **Willis Ave**				**$20,000.00**
	856	**Curb Ramp Required**	**N**	**$7,000.00**
	858	**Perpendicular**	**SE**	**$6,500.00**
	857	**Perpendicular**	**SW**	**$6,500.00**
Total Cost for Street: Valencia Ave				**$90,500.00**
Intersection ID and Street Names:		Type:	Orientation:	
1470 Valencia Ave and **Mango Ave**				**$5,500.00**
	3740	**Perpendicular**	**NE**	**$3,000.00**
	3741	**Perpendicular**	**NW**	**$2,500.00**
21 Valencia Ave and **Navel Ave**				**$14,000.00**
	2989	**Perpendicular**	**NE**	**$2,500.00**
	2990	**Perpendicular**	**NW**	**$2,500.00**
	2992	**Perpendicular**	**SE**	**$2,500.00**
	2991	**Perpendicular**	**SW**	**$6,500.00**
1464 Valencia Ave and **Pecan Ave**				**$6,500.00**
	2979	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
	2978	**Perpendicular**	**NW**	**$0.00**
	2976	**Perpendicular**	**SE**	**$6,500.00**

2977	**Perpendicular**	**SW**	**$0.00**
19 Valencia Ave and **Perkins Ave**			**$14,000.00**
3022	**Perpendicular**	**NE**	**$2,500.00**
3021	**Perpendicular**	**NW**	**$6,500.00**
3019	**Perpendicular**	**SE**	**$2,500.00**
3020	**Perpendicular**	**SW**	**$2,500.00**
704 Valencia Ave and **San Bruno Ave**			**$23,000.00**
3720	**Perpendicular**	**ENE**	**$3,000.00**
3721	**Perpendicular**	**ESE**	**$3,000.00**
3727	**Perpendicular**	**NNE**	**$3,000.00**
3726	**Perpendicular**	**NNW**	**$3,000.00**
3722	**Perpendicular**	**SSE**	**$3,000.00**
3723	**Perpendicular**	**SSW**	**$3,000.00**
3725	**Perpendicular**	**WNW**	**$2,500.00**
3724	**Perpendicular**	**WSW**	**$2,500.00**
705 Valencia Ave and **San Ramon Ave**			**$13,500.00**
3713	**Perpendicular**	**NE**	**$3,250.00**
3714	**Perpendicular**	**SE**	**$3,250.00**
3715	**Curb Ramp Required**	**SW**	**$7,000.00**
20 Valencia Ave and **Saunders Ave**			**$14,000.00**
2974	**Perpendicular**	**NE**	**$6,500.00**
2975	**Perpendicular**	**NW**	**$2,500.00**
2973	**Perpendicular**	**SE**	**$2,500.00**
2972	**Perpendicular**	**SW**	**$2,500.00**

Total Cost for Street: Valley Way — $65,250.00

Intersection ID and Street Names:	Type:	Orientation:	
1191 Valley Way and **National Ave**			**$13,500.00**
1657	**Curb Ramp Required**	**N**	**$7,000.00**
1659	**Perpendicular**	**SE**	**$3,250.00**
1658	**Perpendicular**	**SW**	**$3,250.00**
715 Valley Way and **Pinewood Dr**			**$21,000.00**
1594	**Curb Ramp Required**	**E**	**$7,000.00**
1595	**Perpendicular**	**NW**	**$7,000.00**
1596	**Perpendicular**	**SW**	**$7,000.00**
714 Valley Way and **Riverview Dr**			**$13,500.00**
1591	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1593	**Perpendicular**	**SE**	**$7,000.00**
1592	**Perpendicular**	**SW**	**$6,500.00**
853 Valley Way and **Third St**			**$0.00**
1710	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1709	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1711	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**

852	**Valley Way** and **Willow Ct**			**$17,250.00**
	1668	**Perpendicular**	**NE**	**$3,250.00**
	1667	**Perpendicular**	**SE**	**$7,000.00**
	1666	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street:	**Varbella Pk** **$36,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1565	**Varbella Pk** and		**$16,500.00**
3040	**Curb Ramp Required**	**NE**	**$13,500.00**
3039	**Perpendicular**	**SW**	**$3,000.00**
628	**Varbella Pk** and **Las Casas Ln**		**$20,000.00**
3175	**Perpendicular**	**NE**	**$6,500.00**
3176	**Curb Ramp Required**	**NW**	**$7,000.00**
3177	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street:	**Venturi Ave** **$13,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1161	**Venturi Ave** and **El Rancho Dr**		**$0.00**
780	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
781	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
782	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1319	**Venturi Ave** and **N Schnoor Ave**		**$0.00**
783	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
785	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
784	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
786	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
123	**Venturi Ave** and **Shannon Ave**		**$13,500.00**
680	**Perpendicular**	**NE**	**$7,000.00**
681	**Perpendicular**	**SE**	**$6,500.00**

Total Cost for Street:	**Verde Mesa Way** **$16,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
177	**Verde Mesa Way** and **Corona Dr**		**$16,500.00**
3452	**Perpendicular**	**NE**	**$3,000.00**
3450	**Perpendicular**	**NW**	**$6,500.00**
3451	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street:	**Via Cerioni** **$49,000.00**

Intersection ID and Street Names:	Type:	Orientation:

155 Via Cerioni and Sunset Ave			**$28,000.00**
1436	**Perpendicular**	**NE**	**$7,000.00**
1433	**Perpendicular**	**NW**	**$7,000.00**
1435	**Perpendicular**	**SE**	**$7,000.00**
1434	**Perpendicular**	**SW**	**$7,000.00**
156 Via Cerioni and Via Capitola			**$21,000.00**
1427	**Curb Ramp Required**	**E**	**$7,000.00**
1429	**Perpendicular**	**NW**	**$7,000.00**
1428	**Perpendicular**	**SW**	**$7,000.00**

Total Cost for Street: Via Santa Barbara **$27,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
231 Via Santa Barbara and Caitlan Drive			**$14,000.00**
1431	**Perpendicular**	**NE**	**$7,000.00**
1432	**Perpendicular**	**SE**	**$7,000.00**
1430	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1607 Via Santa Barbara and Via Ceroni			**$13,000.00**
4495	**Perpendicular**	**NW**	**$6,500.00**
4497	**Driveway**	**SE**	**$0.00**
4496	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Vineyard Ave **$10,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1211 Vineyard Ave and 9Th St			**$0.00**
4316	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
4318	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
4317	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1168 Vineyard Ave and Cross St			**$0.00**
4359	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
4358	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
4360	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1167 Vineyard Ave and Washington St			**$10,250.00**
3260	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3258	**Perpendicular**	**N**	**$3,250.00**
3259	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: W 1St St **$24,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1368 W 1St St and N G St			**$24,250.00**
1008	**Combination**	**E**	**$7,000.00**
1011	**Combination**	**N**	**$7,000.00**

1009	**Perpendicular**	**S**	**$3,250.00**
1010	**Perpendicular**	**W**	**$7,000.00**

Total Cost for Street: W 1Sth St — $10,000.00

Intersection ID and Street Names:	Type:	Orientation:	
930 W 1Sth St and **N H St**			**$10,000.00**
1027	**Perpendicular**	**E**	**$7,000.00**
1026	**Parallel**	**N**	**$3,000.00**
1025	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: W 2Nd St — $38,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1343 W 2Nd St and **N G St**			**$24,000.00**
1004	**Combination**	**E**	**$7,000.00**
1007	**Combination**	**N**	**$7,000.00**
1005	**Combination**	**S**	**$7,000.00**
1006	**Combination**	**W**	**$3,000.00**
961 W 2Nd St and **N H St**			**$14,000.00**
1031	**Combination**	**E**	**$7,000.00**
1030	**Perpendicular**	**N**	**$7,000.00**
1029	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1028	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
943 W 2Nd St and **N Park Dr**			**$0.00**
953	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
954	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
955	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: W 3Rd St — $38,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1299 W 3Rd St and **N G St**			**$24,000.00**
1037	**Perpendicular**	**E**	**$6,500.00**
1038	**Combination**	**N**	**$7,000.00**
1035	**Combination**	**S**	**$3,500.00**
1036	**Curb Ramp Required**	**W**	**$7,000.00**
785 W 3Rd St and **N H St**			**$14,000.00**
1033	**Combination**	**E**	**$7,000.00**
1034	**Combination**	**S**	**$7,000.00**
1032	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
280 W 3Rd St and **W 3Rd St**			**$0.00**
1086	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1085	**Driveway**	**S**	**$0.00**

Total Cost for Street: W 4Th St — $45,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1391 W 4Th St and N Gateway Dr			**$11,000.00**
1078	**Parallel**	**E**	**$500.00**
1077	**Parallel**	**N**	**$500.00**
1079	**Perpendicular**	**S**	**$3,000.00**
1080	**Perpendicular**	**W**	**$7,000.00**
795 W 4Th St and N H St			**$17,500.00**
1098	**Parallel**	**E**	**$7,000.00**
1095	**Perpendicular**	**N**	**$7,000.00**
1097	**Parallel**	**S**	**$3,500.00**
1096	**Perpendicular**	**W**	**$0.00**
612 W 4Th St and N J St			**$17,000.00**
987	**Parallel**	**E**	**$3,500.00**
986	**Island-Cut Through**	**N**	**$0.00**
985	**Perpendicular**	**NE**	**$3,000.00**
984	**Perpendicular**	**NW**	**$3,000.00**
982	**Parallel**	**S**	**$7,000.00**
983	**Perpendicular**	**W**	**$500.00**

Total Cost for Street: W 6th St — $27,500.00

Intersection ID and Street Names:	Type:	Orientation:	
666 W 6th St and S Gateway Dr			**$27,500.00**
4262	**Perpendicular**	**E**	**$7,000.00**
4259	**Perpendicular**	**N**	**$7,000.00**
4261	**Perpendicular**	**S**	**$7,000.00**
4260	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: W Almond Ave — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
646 W Almond Ave and Hazelnut Dr			**$13,500.00**
2633	**Curb Ramp Required**	**NW**	**$7,000.00**
2634	**Perpendicular**	**SE**	**$3,250.00**
2632	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: W Central Ave — $75,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1051 W Central Ave and Central Pl			**$20,500.00**
830	**Curb Ramp Required**	**E**	**$7,000.00**

832	**Perpendicular**	**NW**	**$7,000.00**
831	**Perpendicular**	**SW**	**$6,500.00**
980 W Central Ave and **Lillian St**			**$0.00**
881	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
880	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
882	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
875 W Central Ave and **N G St**			**$13,500.00**
1017	**Curb Ramp Required**	**E**	**$7,000.00**
1016	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1018	**Perpendicular**	**S**	**$6,500.00**
1050 W Central Ave and **Orchard Ave**			**$20,500.00**
828	**Perpendicular**	**NE**	**$7,000.00**
829	**Perpendicular**	**SE**	**$6,500.00**
827	**Curb Ramp Required**	**W**	**$7,000.00**
748 W Central Ave and **Riverview Dr**			**$21,000.00**
884	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$7,000.00**
883	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$7,000.00**
885	**No Sidewalk, Curb Ramp Not Required**	**S**	**$7,000.00**

Total Cost for Street: W Clark St $53,250.00

Intersection ID and Street Names:	Type:	Orientation:	
380 W Clark St and **Country Club Dr**			**$20,000.00**
3868	**Parallel**	**NE**	**$7,000.00**
3867	**Perpendicular**	**NW**	**$3,000.00**
3869	**Perpendicular**	**SE**	**$3,000.00**
3866	**Perpendicular**	**SW**	**$7,000.00**
382 W Clark St and **Sonora St**			**$20,000.00**
3914	**Curb Ramp Required**	**E**	**$7,000.00**
3916	**Perpendicular**	**NW**	**$6,500.00**
3915	**Perpendicular**	**SW**	**$6,500.00**
381 W Clark St and **Taylor St**			**$13,250.00**
3919	**Curb Ramp Required**	**N**	**$7,000.00**
3917	**Perpendicular**	**SE**	**$3,250.00**
3918	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: W Cleveland Ave $148,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1523 W Cleveland Ave and			**$35,750.00**
2447	**Perpendicular**	**NE**	**$3,250.00**
2448	**Perpendicular**	**NW**	**$6,500.00**
2449	**Perpendicular**	**SE**	**$13,000.00**
2450	**Perpendicular**	**SW**	**$13,000.00**

452 W Cleveland Ave and **East Loop**			**$0.00**
2477	**Driveway**	**S**	**$0.00**
454 W Cleveland Ave and **Glade Ave**			**$26,250.00**
2267	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2269	**Perpendicular**	**NW**	**$6,500.00**
2268	**Curb Ramp Required**	**SE**	**$10,000.00**
2270	**Perpendicular**	**SW**	**$9,750.00**
1113 W Cleveland Ave and **N Gateway Dr**			**$24,500.00**
3934	**Parallel**	**NE**	**$7,000.00**
3935	**Perpendicular**	**NNW**	**$6,500.00**
3939	**Perpendicular**	**SE**	**$500.00**
3938	**Perpendicular**	**SW**	**$7,000.00**
3937	**Island-Cut Through**	**W**	**$500.00**
3936	**Perpendicular**	**WNW**	**$3,000.00**
394 W Cleveland Ave and **N Schnoor Ave**			**$16,000.00**
2442	**Perpendicular**	**NE**	**$3,000.00**
2441	**Perpendicular**	**NW**	**$3,250.00**
2443	**Perpendicular**	**SE**	**$3,250.00**
2444	**Perpendicular**	**SW**	**$6,500.00**
1425 W Cleveland Ave and **Sharon Bvd**			**$13,500.00**
3933	**Parallel**	**NE**	**$7,000.00**
3932	**Perpendicular**	**SE**	**$6,500.00**
453 W Cleveland Ave and **Stephanie Ln**			**$22,750.00**
2453	**Perpendicular**	**NE**	**$6,500.00**
2454	**Perpendicular**	**NW**	**$6,500.00**
2451	**Perpendicular**	**SE**	**$3,250.00**
2452	**Perpendicular**	**SW**	**$6,500.00**
455 W Cleveland Ave and **Sundance Ln**			**$9,750.00**
2476	**Perpendicular**	**NW**	**$6,500.00**
2475	**Perpendicular**	**SE**	**$3,250.00**

Total Cost for Street: W El Monte Ct **$13,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
414 W El Monte Ct and **Monterey St**			**$13,000.00**
359	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
358	**Perpendicular**	**NW**	**$6,500.00**
357	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: W Park Dr **$81,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
924 W Park Dr and **Chateau Pl**			**$0.00**

760	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
758	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
759	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1364 W Park Dr and **Claremont Dr**			**$7,000.00**
755	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
756	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
754	**Curb Ramp Required**	**SE**	**$7,000.00**
757	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
344 W Park Dr and **Mainberry Dr**			**$27,000.00**
644	**Perpendicular**	**NE**	**$7,000.00**
643	**Perpendicular**	**NW**	**$6,500.00**
645	**Perpendicular**	**SE**	**$7,000.00**
642	**Perpendicular**	**SW**	**$6,500.00**
1405 W Park Dr and **N Schnoor Ave**			**$7,000.00**
688	**Curb Ramp Required**	**NE**	**$7,000.00**
685	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
687	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
686	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1333 W Park Dr and **Orchard Ave**			**$0.00**
752	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
751	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
753	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
750	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
345 W Park Dr and **Royal Dr**			**$20,000.00**
689	**Perpendicular**	**NE**	**$6,500.00**
691	**Perpendicular**	**NW**	**$6,500.00**
690	**Curb Ramp Required**	**S**	**$7,000.00**
343 W Park Dr and **Shannon Ave**			**$20,500.00**
684	**Perpendicular**	**E**	**$7,000.00**
682	**Curb Ramp Required**	**N**	**$7,000.00**
683	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: W Roberts Ave **$41,750.00**

Intersection ID and Street Names:	Type:	Orientation:	
1382 W Roberts Ave and **N G St**			**$17,500.00**
1012	**Combination**	**E**	**$3,500.00**
1015	**Perpendicular**	**N**	**$7,000.00**
1013	**Combination**	**S**	**$7,000.00**
1014	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
958 W Roberts Ave and **N H St**			**$10,250.00**
1024	**Parallel**	**E**	**$7,000.00**
1023	**Perpendicular**	**N**	**$3,250.00**
1022	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

1173	**W Roberts Ave** and **N Pine St**			**$14,000.00**
	897	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
	899	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$7,000.00**
	896	**Curb Ramp Required**	**SE**	**$7,000.00**
	898	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: W Sherwood Way — $53,500.00

Intersection ID and Street Names:	Type:	Orientation:	
523 **W Sherwood Way** and **Davis St**			**$9,000.00**
1240	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1242	**Perpendicular**	**SE**	**$6,500.00**
1241	**Perpendicular**	**SW**	**$2,500.00**
522 **W Sherwood Way** and **Fresno St**			**$0.00**
2264	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2263	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2261	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2262	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
526 **W Sherwood Way** and **N D St**			**$22,750.00**
1337	**Perpendicular**	**NE**	**$6,500.00**
1336	**Perpendicular**	**NW**	**$6,500.00**
1338	**Perpendicular**	**SE**	**$6,500.00**
1339	**Perpendicular**	**SW**	**$3,250.00**
524 **W Sherwood Way** and **Owens St**			**$9,500.00**
1234	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1233	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1235	**Perpendicular**	**SE**	**$3,000.00**
1236	**Perpendicular**	**SW**	**$6,500.00**
525 **W Sherwood Way** and **Sonora St**			**$12,250.00**
1331	**Perpendicular**	**NE**	**$2,500.00**
1330	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1332	**Perpendicular**	**SE**	**$3,250.00**
1329	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: W South St — $75,250.00

Intersection ID and Street Names:	Type:	Orientation:	
504 **W South St** and **Bloker St**			**$17,000.00**
1267	**Perpendicular**	**NE**	**$6,500.00**
1268	**Parallel**	**NW**	**$3,500.00**
1266	**Curb Ramp Required**	**S**	**$7,000.00**
729 **W South St** and **E Lincoln Ave**			**$12,750.00**
1132	**Perpendicular**	**NE**	**$3,000.00**
1131	**Perpendicular**	**NW**	**$3,250.00**

1129	**Perpendicular**	**SE**	**$3,000.00**
1130	**Parallel**	**SW**	**$3,500.00**
501 W South St and N Lake St			**$20,500.00**
4071	**Perpendicular**	**E**	**$6,500.00**
4072	**Perpendicular**	**NW**	**$7,000.00**
4070	**Perpendicular**	**SW**	**$7,000.00**
503 W South St and Sierra St			**$12,500.00**
1150	**Perpendicular**	**NE**	**$3,000.00**
1149	**Perpendicular**	**NW**	**$3,000.00**
1151	**Perpendicular**	**SE**	**$3,250.00**
1152	**Perpendicular**	**SW**	**$3,250.00**
500 W South St and Sonora St			**$12,500.00**
1171	**Perpendicular**	**NE**	**$3,250.00**
1172	**Perpendicular**	**NW**	**$3,250.00**
1170	**Perpendicular**	**SE**	**$3,000.00**
1173	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: W Yosemite Ave **$113,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
775 W Yosemite Ave and N G St			**$20,500.00**
1111	**Perpendicular**	**N**	**$7,000.00**
1109	**Perpendicular**	**S**	**$6,500.00**
1110	**Perpendicular**	**W**	**$7,000.00**
1399 W Yosemite Ave and N Q St			**$20,250.00**
63	**Perpendicular**	**ESE**	**$0.00**
64	**Perpendicular**	**NE**	**$0.00**
65	**Perpendicular**	**NW**	**$6,500.00**
62	**Island-Perpendicular**	**SE**	**$3,250.00**
60	**Parallel**	**SSW**	**$7,000.00**
61	**Island-Parallel**	**SW**	**$3,500.00**
776 W Yosemite Ave and S H St			**$21,000.00**
1107	**Perpendicular**	**E**	**$7,000.00**
1106	**Curb Ramp Required**	**NW**	**$7,000.00**
1108	**Parallel**	**S**	**$7,000.00**
1327 W Yosemite Ave and S I St			**$16,500.00**
154	**Combination**	**E**	**$3,500.00**
153	**Perpendicular**	**N**	**$6,500.00**
155	**Perpendicular**	**S**	**$3,250.00**
156	**Perpendicular**	**W**	**$3,250.00**
1378 W Yosemite Ave and S J St			**$17,500.00**
149	**Combination**	**E**	**$3,500.00**
150	**Combination**	**N**	**$3,500.00**
152	**Combination**	**S**	**$7,000.00**

151	**Combination**	**W**	**$3,500.00**
1445 W Yosemite Ave and **S M St**			**$17,500.00**
104	**Combination**	**NE**	**$7,000.00**
107	**Combination**	**NW**	**$0.00**
105	**Combination**	**SE**	**$3,500.00**
106	**Combination**	**SW**	**$7,000.00**

Total Cost for Street: Walnut St — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
1437 Walnut St and **Cortopassi St**			**$0.00**
3560	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3561	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
3563	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3562	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1185 Walnut St and **Madera Ave**			**$7,000.00**
3566	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
3564	**Perpendicular**	**NW**	**$7,000.00**
3565	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Washington St — $36,750.00

Intersection ID and Street Names:	Type:	Orientation:	
1303 Washington St and **Lilly St**			**$13,500.00**
3254	**Perpendicular**	**E**	**$7,000.00**
3257	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3255	**Perpendicular**	**S**	**$6,500.00**
3256	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1386 Washington St and **Magnolia St**			**$7,000.00**
3229	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
3232	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3230	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
3231	**Curb Ramp Required**	**W**	**$7,000.00**
793 Washington St and **Malone St**			**$3,250.00**
3277	**Perpendicular**	**E**	**$3,250.00**
3278	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
3279	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
969 Washington St and **Washington Ct**			**$13,000.00**
3234	**Perpendicular**	**E**	**$6,500.00**
3235	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
3233	**Perpendicular**	**S**	**$6,500.00**

Total Cost for Street: Wawona Ct — $9,500.00

Intersection ID and Street Names:	Type:	Orientation:	
669 Wawona Ct and Monterey St			**$9,500.00**
342	**Driveway**	**E**	**$0.00**
344	**Perpendicular**	**NW**	**$6,500.00**
343	**Perpendicular**	**SW**	**$3,000.00**

Total Cost for Street: Wessmith Way — $7,000.00

Intersection ID and Street Names:	Type:	Orientation:	
393 Wessmith Way and Fresno St			**$0.00**
2245	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2242	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2244	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2243	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
392 Wessmith Way and Merced St			**$0.00**
2251	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
2250	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2252	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
2253	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1112 Wessmith Way and Tulare St			**$7,000.00**
2200	**Curb Ramp Required**	**E**	**$7,000.00**
2202	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
2201	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Westberry Bvd — $156,500.00

Intersection ID and Street Names:	Type:	Orientation:	
851 Westberry Bvd and Baron St			**$20,000.00**
1443	**Curb Ramp Required**	**E**	**$7,000.00**
1442	**Perpendicular**	**NW**	**$6,500.00**
1441	**Perpendicular**	**SW**	**$6,500.00**
997 Westberry Bvd and Cambria Ave			**$20,000.00**
1528	**Curb Ramp Required**	**E**	**$7,000.00**
1529	**Perpendicular**	**NW**	**$6,500.00**
1530	**Perpendicular**	**SW**	**$6,500.00**
850 Westberry Bvd and Crown Ln			**$13,500.00**
1447	**Perpendicular**	**NE**	**$3,250.00**
1449	**Perpendicular**	**SE**	**$3,250.00**
1448	**Curb Ramp Required**	**W**	**$7,000.00**
1212 Westberry Bvd and Ren Way			**$21,000.00**
1869	**Perpendicular**	**NE**	**$7,000.00**

	1867	**Perpendicular**	**SE**	**$7,000.00**
	1868	**Curb Ramp Required**	**W**	**$7,000.00**
1229 Westberry Bvd and **State St**				**$20,000.00**
	1445	**Curb Ramp Required**	**E**	**$7,000.00**
	1446	**Perpendicular**	**NW**	**$6,500.00**
	1444	**Perpendicular**	**SW**	**$6,500.00**
541 Westberry Bvd and **Summer Ln**				**$21,000.00**
	1682	**Curb Ramp Required**	**E**	**$7,000.00**
	1683	**Perpendicular**	**NW**	**$7,000.00**
	1684	**Perpendicular**	**SW**	**$7,000.00**
573 Westberry Bvd and **Todd St**				**$20,500.00**
	1450	**Curb Ramp Required**	**E**	**$7,000.00**
	1452	**Perpendicular**	**NW**	**$6,500.00**
	1451	**Perpendicular**	**SW**	**$7,000.00**
540 Westberry Bvd and **Westgate Dr**				**$20,500.00**
	1686	**Perpendicular**	**NE**	**$6,500.00**
	1687	**Perpendicular**	**SE**	**$7,000.00**
	1685	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Westgate Dr **$34,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
553 Westgate Dr and **Autumn Rd**			**$0.00**
1744	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1743	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1742	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
91 Westgate Dr and **Timberline Dr**			**$14,000.00**
1691	**Curb Ramp Required**	**NW**	**$7,000.00**
1692	**Perpendicular**	**SE**	**$7,000.00**
904 Westgate Dr and **Westberry Bvd**			**$20,500.00**
1693	**Curb Ramp Required**	**E**	**$7,000.00**
1695	**Perpendicular**	**NW**	**$7,000.00**
1694	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Williams Ave **$62,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1131 Williams Ave and **Fifth St**			**$14,000.00**
518	**Curb Ramp Required**	**E**	**$7,000.00**
513	**Curb Ramp Required**	**NE**	**$7,000.00**
516	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
514	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
517	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
515	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

757 Williams Ave and **Fourth St**			**$0.00**
485	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
484	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
483	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
781 Williams Ave and **Jennings St**			**$0.00**
482	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
477	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
480	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
478	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
481	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
479	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**
1383 Williams Ave and **Princeton Ave**			**$22,750.00**
848	**Perpendicular**	**NE**	**$6,500.00**
851	**Perpendicular**	**NW**	**$6,500.00**
849	**Perpendicular**	**SE**	**$3,250.00**
850	**Perpendicular**	**SW**	**$6,500.00**
1028 Williams Ave and **Third St**			**$3,000.00**
446	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
449	**Perpendicular**	**NW**	**$3,000.00**
447	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
448	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1298 Williams Ave and **University Ave**			**$22,750.00**
855	**Perpendicular**	**NE**	**$6,500.00**
852	**Perpendicular**	**NW**	**$6,500.00**
854	**Perpendicular**	**SE**	**$6,500.00**
853	**Perpendicular**	**SW**	**$3,250.00**
1434 Williams Ave and **Venturi Ave**			**$0.00**
773	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
774	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
775	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
772	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1297 Williams Ave and **W Park Dr**			**$0.00**
762	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
764	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
763	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

Total Cost for Street: Willis Ave **$7,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
955 Willis Ave and **Fifth St**			**$0.00**
521	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
520	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
519	**No Sidewalk, Curb Ramp Not Required**	**S**	**$0.00**
1375 Willis Ave and **National Ave**			**$0.00**

438	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
439	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
441	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
440	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1428 Willis Ave and **Third St**			**$0.00**
451	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
450	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
452	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
453	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1184 Willis Ave and **Venturi Ave**			**$0.00**
768	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
770	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
771	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
769	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1103 Willis Ave and **W Park Dr**			**$0.00**
766	**No Sidewalk, Curb Ramp Not Required**	**E**	**$0.00**
765	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
767	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1102 Willis Ave and **W Roberts Ave**			**$7,000.00**
861	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
860	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
859	**Curb Ramp Required**	**W**	**$7,000.00**

Total Cost for Street: Willow Dr — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
844 Willow Dr and **Fall Ave**			**$0.00**
1640	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1642	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1641	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
845 Willow Dr and **Holiday Way**			**$0.00**
1643	**No Sidewalk, Curb Ramp Not Required**	**N**	**$0.00**
1639	**No Sidewalk, Curb Ramp Not Required**	**NE**	**$0.00**
1644	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
1645	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**
1637	**No Sidewalk, Curb Ramp Not Required**	**W**	**$0.00**

Total Cost for Street: Wilson Ave — $33,000.00

Intersection ID and Street Names:	Type:	Orientation:	
311 Wilson Ave and **Davis St**			**$19,500.00**
1221	**Perpendicular**	**NE**	**$6,500.00**
1222	**Perpendicular**	**NW**	**$6,500.00**
1220	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**

1223	**Perpendicular**	**SW**	**$6,500.00**
312 Wilson Ave and **Owens St**			**$13,500.00**
1206	**Perpendicular**	**NE**	**$6,500.00**
1204	**No Sidewalk, Curb Ramp Not Required**	**NW**	**$0.00**
1207	**Parallel**	**SE**	**$7,000.00**
1205	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Windsox Ct **$20,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
841 Windsox Ct and **Paintbrush Dr**			**$20,000.00**
1476	**Curb Ramp Required**	**NE**	**$7,000.00**
1475	**Perpendicular**	**S**	**$6,500.00**
1477	**Perpendicular**	**W**	**$6,500.00**

Total Cost for Street: Winter Way **$17,250.00**

Intersection ID and Street Names:	Type:	Orientation:	
1130 Winter Way and **Kent Dr**			**$17,250.00**
1701	**Perpendicular**	**NE**	**$7,000.00**
1700	**Perpendicular**	**NW**	**$3,250.00**
1699	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Wolftrap St **$7,000.00**

Intersection ID and Street Names:	Type:	Orientation:	
165 Wolftrap St and **Summer Ln**			**$7,000.00**
1843	**Under Construction**	**NW**	**$0.00**
1844	**Curb Ramp Required**	**SW**	**$7,000.00**

Total Cost for Street: Woodlands Dr **$55,500.00**

Intersection ID and Street Names:	Type:	Orientation:	
1411 Woodlands Dr and **Forest Ln**			**$28,000.00**
1520	**Perpendicular**	**NE**	**$7,000.00**
1521	**Perpendicular**	**NW**	**$7,000.00**
1523	**Perpendicular**	**SE**	**$7,000.00**
1522	**Perpendicular**	**SW**	**$7,000.00**
1412 Woodlands Dr and **Hillcrest Ct**			**$27,500.00**
1516	**Perpendicular**	**NE**	**$7,000.00**
1517	**Perpendicular**	**NW**	**$7,000.00**
1519	**Perpendicular**	**SE**	**$7,000.00**
1518	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for Street: Wrenwood Way — $20,000.00

Intersection ID and Street Names:	Type:	Orientation:	
565 Wrenwood Way and Kern St			**$20,000.00**
2226	**Perpendicular**	**NE**	**$6,500.00**
2225	**Perpendicular**	**NW**	**$6,500.00**
2224	**Curb Ramp Required**	**S**	**$7,000.00**

Total Cost for Street: Yeager Rd — $0.00

Intersection ID and Street Names:	Type:	Orientation:	
993 Yeager Rd and Falcon Dr			**$0.00**
3789	**Driveway**	**N**	**$0.00**
3791	**No Sidewalk, Curb Ramp Not Required**	**SE**	**$0.00**
3790	**No Sidewalk, Curb Ramp Not Required**	**SW**	**$0.00**

Total Cost for Street: Zak Way — $13,500.00

Intersection ID and Street Names:	Type:	Orientation:	
1046 Zak Way and Diane Way			**$13,500.00**
1545	**Curb Ramp Required**	**E**	**$7,000.00**
1546	**Perpendicular**	**NW**	**$3,250.00**
1547	**Perpendicular**	**SW**	**$3,250.00**

Total Cost for Street: Zapata St — $16,750.00

Intersection ID and Street Names:	Type:	Orientation:	
630 Zapata St and E Ellis St			**$16,750.00**
2060	**Curb Ramp Required**	**N**	**$7,000.00**
2061	**Perpendicular**	**SE**	**$3,250.00**
2062	**Perpendicular**	**SW**	**$6,500.00**

Total Cost for City Curb Ramps: **$19,209,500.00**

SURVEY DATA

April 2024
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1448	10th St	S B St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4334 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.4
Right Flare	(%)	**12.3**
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4333 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
93

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	**13.5**
Right Flare	(%)	**13.0**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4331 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**10.4**
Right Flare	(%)	9.9
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4332 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.7
Right Flare	(%)	**14.5**
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 10th St and S B St $27,500.00

E Perpendicular

3676 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.1**
Right Flare	(%)	9.1
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3679 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.7
Right Flare	(%)	5.5
Gutter Slope	(%)	**13.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3677 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
81

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.8**
Right Flare	(%)	**12.8**
Gutter Slope	(%)	**13.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3678 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	9.0
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 10th St and S D St $27,000.00

E No Sidewalk, Curb Ramp Not Required

4397 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

4396 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4398 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 10th St and S E St **$0.00**

Total Costs for Curb Ramps along : 10th St **$54,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1360	11Th St	S A St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

3620 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
72

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.3
Right Flare	(%)	6.6
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3619 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
80

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.2**
Right Flare	(%)	7.9
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

3617 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.3%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	75.0	48.0
Length of Ramp / Pad	(in)	126.0	157.0
Slope of the Ramp / Pad	(%)	5.3	4.5
X Slope of the Ramp / Pad	(%)	1.6	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.7	1.9
Top Landing X Slope	(%)	1.7	**2.3**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3618 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

- *Notes:* BL Length: 62.0"
  BL Slope: 2.2%

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.0
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.5 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 11Th St *and* S A St **$16,250.00**

E Perpendicular

3615 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.4
Right Flare	(%)	7.1
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3614 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
92

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**12.3**
Right Flare	(%)	8.2
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3616 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.9
Right Flare	(%)	5.8
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3613 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	10.0
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.3 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 11Th St and S B St **$26,000.00**

E Perpendicular

3606 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 16.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**16.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**12.2**
Right Flare	(%)	9.3
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3607 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.0
Right Flare	(%)	**11.7**
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3605 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
72

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.0
Right Flare	(%)	7.0
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3608 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	**10.4**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 11Th St and S D St **$22,750.00**

Total Costs for Curb Ramps along : 11Th St **$65,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	726	12Th St	Roosevelt Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

3350 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
72

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.8
Right Flare	(%)	5.8
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

3352 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
149

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3351 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
72

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.1
Right Flare	(%)	7.0
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and Roosevelt Ave **$13,000.00**

E Perpendicular

3621 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
82

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**12.7**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3622 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
92

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**13.9**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3624 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.1**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3623 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.8
Right Flare	(%)	7.8
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S A St **$26,000.00**

E Perpendicular

3625 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**12.1**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3626 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
89

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.8
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3628 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.9
Right Flare	(%)	8.1
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3627 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.6
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S B St $26,000.00

E Perpendicular

3598 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.4**
Right Flare	(%)	**13.3**
Gutter Slope	(%)	**15.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3599 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.1**
Right Flare	(%)	9.2
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3597 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
102

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**13.2**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**14.1**
Right Flare	(%)	**16.1**
Gutter Slope	(%)	**13.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3600 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 15.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
96

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**15.7**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**18.9**
Right Flare	(%)	**20.8**
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S C St **$26,000.00**

E Perpendicular

3602 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.9
Right Flare	(%)	3.5
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3601 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
90

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.8**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.5
Right Flare	(%)	**13.1**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3603 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.2
Right Flare	(%)	6.8
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.5**

Street Grade (Left / Right)	(%)	0.3 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3604 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	9.0
Right Flare	(%)	10.0
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S D St **$26,000.00**

NE Perpendicular

3077 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.2
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3078 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.1
Right Flare	(%)	**14.1**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3076 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3075 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S G St $9,750.00

NE Perpendicular

3349 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
67

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.7%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.8
Right Flare	(%)	6.4
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3347 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.2**
Right Flare	(%)	9.7
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3348 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 12Th St and S Lake St **$20,000.00**

Total Costs for Curb Ramps along : 12Th St **$146,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1267	13Th St	S A St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3434 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

3432 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.6**
Right Flare	(%)	7.8
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3433 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
88

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.6
Right Flare	(%)	9.1
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 13Th St and S A St **$20,500.00**

E Perpendicular

3438 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	**10.2**
Right Flare	(%)	5.5
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3435 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	54.5
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.0**
Right Flare	(%)	7.7
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3437 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.3
Right Flare	(%)	7.8
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3436 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**12.4**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 13Th St and S B St $22,750.00

E Perpendicular

3594 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.9
Right Flare	(%)	8.5
Gutter Slope	(%)	**19.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3595 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.8**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.5
Right Flare	(%)	6.4
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3593 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.3
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3596 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.2
Right Flare	(%)	5.2
Gutter Slope	(%)	**18.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 13Th St and S C St **$26,000.00**

Total Costs for Curb Ramps along : 13Th St **$69,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1160	14Th St	Don Miguel St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Perpendicular

3062 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.3
Right Flare	(%)	7.9
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Curb Ramp Required

3063 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3061 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
33

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.5
Right Flare	(%)	5.6
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.9	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 14Th St and Don Miguel St $16,000.00

E No Sidewalk, Curb Ramp Not Required

3048 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

N No Sidewalk, Curb Ramp Not Required

3050 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3049 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3052 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

W No Sidewalk, Curb Ramp Not Required

3051 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : 14Th St and S E St **$0.00**

Total Costs for Curb Ramps along : 14Th St **$16,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1030**	**1St St**	**N E St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

1057 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.5
Right Flare	(%)	6.8
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5	3.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1056 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
28

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.6
Right Flare	(%)	5.8
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.7 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1055 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 1St St and N E St **$13,500.00**

Total Costs for Curb Ramps along : 1St St **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1357	2Nd St	N C St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3823 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.0
Right Flare	(%)	7.9
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3826 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.1
Right Flare	(%)	9.2
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3824 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 16.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
82

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**16.5**
X Slope of the Ramp / Pad	(%)	**5.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**21.0**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3825 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**9.9**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**12.1**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 2Nd St and N C St $27,000.00

E Perpendicular

3827 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.8**
Right Flare	(%)	7.9
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3830 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.4
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3828 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.6
Right Flare	(%)	9.5
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.9	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

3829 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**11.5**
Right Flare	(%)	8.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 2Nd St and N D St $23,000.00

E Perpendicular

1060 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.8
Right Flare	(%)	9.6
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1059 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
33

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	8.2
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Driveway

1058 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 2Nd St and N E St **$9,500.00**

Total Costs for Curb Ramps along : **2Nd St** **$59,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1148**	**4Th St**	**Flume St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4196 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.1
Right Flare	(%)	8.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Parallel

4195 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	49.0	48.0
Length of Ramp / Pad	(in)	78.0	79.0
Slope of the Ramp / Pad	(%)	7.4	7.0
X Slope of the Ramp / Pad	(%)	**2.7**	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.7
Top Landing X Slope	(%)	0.1	**2.6**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4198 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 32.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
88

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**5.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**13.8**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4197 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
94

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**7.6**
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	**13.4**
Right Flare	(%)	9.8
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 4Th St *and* Flume St **$28,000.00**

E Perpendicular

4209 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.6
Right Flare	(%)	9.9
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0.
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4206 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 9.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.2
Right Flare	(%)	8.3
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4208 Ramp Slope

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

• *As-Built Description:*
Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

• *As-is* 3.3%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**3.3**
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.0
Right Flare	(%)	7.9
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4207 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.5
Right Flare	(%)	8.5
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 4Th St and N A St $14,000.00

E Perpendicular

1070 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.4
Right Flare	(%)	9.4
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1069 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	9.3
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1071 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.9
Right Flare	(%)	**10.2**
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.9 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1072 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
48

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.8
Right Flare	(%)	8.6
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1 2.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 4Th St and N D St $14,500.00

E Perpendicular

1074 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	9.9
Right Flare	(%)	7.8
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

1073 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
72

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.1%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	77.0	57.0
Length of Ramp / Pad	(in)	80.0	117.0
Slope of the Ramp / Pad	(%)	5.6	7.5
X Slope of the Ramp / Pad	(%)	1.0	**3.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.9
Top Landing X Slope	(%)	1.1	**2.9**

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.6	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Parallel

1075 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
67

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	148.0	156.0
Length of Ramp / Pad	(in)	70.0	90.0
Slope of the Ramp / Pad	(%)	4.1	6.7
X Slope of the Ramp / Pad	(%)	1.9	**2.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.1
Top Landing X Slope	(%)	0.4	**2.5**

Bottom Landing Length	(in)	**4.9**
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

1076 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	9.7
Right Flare	(%)	6.3
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.4 4.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 4Th St and N E St $27,500.00

E Combination

4199 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
94

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**36.0**	**35.0**
Slope of the Ramp / Pad	(%)	2.5	2.7
X Slope of the Ramp / Pad	(%)	1.6	**3.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.8**	0.2
Top Landing X Slope	(%)	**2.3**	**3.2**

Length of Combo. Ramp	(in)	84.0
Combo. Ramp Slope	(%)	**7.2**
Combo. Ramp X Slope	(%)	0.7

Bottom Landing Length	(in)	64.0
Bottom Landing Slope	(in)	**5.8**
Bottom Landing X Slope	(in)	2.0
Left Flare	(%)	**12.6**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Curb Ramp Required

4200 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4201 Compliant Curb Ramp

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

Unit Cost **$0.00**

Priority
58

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.6
Right Flare	(%)	8.5
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5	0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4202 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	81.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.1
Right Flare	(%)	8.8
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9	1.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 4Th St and S Lake St **$20,500.00**

Total Costs for Curb Ramps along : 4Th St **$104,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1352	5Th St	Flume St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

4218 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 8.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
79

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	58.0
Length of Ramp / Pad	(in)	**36.0**	**36.0**
Slope of the Ramp / Pad	(%)	**8.7**	5.7
X Slope of the Ramp / Pad	(%)	2.0	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.4
Top Landing X Slope	(%)	**2.1**	**2.6**
Length of Combo. Ramp	(in)	84.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	1.7	
Bottom Landing Length	(in)	70.0	
Bottom Landing Slope	(in)	**6.7**	
Bottom Landing X Slope	(in)	2.0	
Left Flare	(%)	**11.4**	
Right Flare	(%)	**13.4**	
Gutter Slope	(%)	**6.0**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.5	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4219 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
56

• *As-Built Description:*
Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

• *Proposed Solution:*
Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	115.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.8
Right Flare	(%)	7.5
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 4.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

4217 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
76

• *As-Built Description:*
Cross slope of existing parallel curb ramp exceeds 2%.

• *As-is* Right: 2.3%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**34.0**	340
Slope of the Ramp / Pad	(%)	6.5	2.9
X Slope of the Ramp / Pad	(%)	1.2	**2.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.1
Top Landing X Slope	(%)	0.3	1.3

Length of Combo. Ramp	(in)	83.0
Combo. Ramp Slope	(%)	7.5
Combo. Ramp X Slope	(%)	0.5

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	**6.0**
Bottom Landing X Slope	(in)	**2.3**
Left Flare	(%)	**13.3**
Right Flare	(%)	10.0
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 3.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Combination

4220 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 15.2%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
90

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	58.0
Length of Ramp / Pad	(in)	**37.0**	**37.0**
Slope of the Ramp / Pad	(%)	6.0	**15.2**
X Slope of the Ramp / Pad	(%)	**3.0**	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	4.5
Top Landing X Slope	(%)	1.6	**5.7**
Length of Combo. Ramp	(in)	70.5	
Combo. Ramp Slope	(%)	6.8	
Combo. Ramp X Slope	(%)	1.8	
Bottom Landing Length	(in)	64.0	
Bottom Landing Slope	(in)	**4.9**	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	**16.3**	
Right Flare	(%)	8.5	
Gutter Slope	(%)	**10.9**	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.1	4.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 5Th St and Flume St **$23,500.00**

E Perpendicular

4338 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
99

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.1
Left Flare	(%)	**14.2**
Right Flare	(%)	**14.8**
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	3.0 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4339 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
87

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**13.5**
Right Flare	(%)	9.0
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	3.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4341 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
99

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**16.2**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**14.7**
Right Flare	(%)	**19.3**
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4340 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
89

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**5.2**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**13.5**
Right Flare	(%)	**12.6**
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 5Th St *and* High St **$27,500.00**

N No Sidewalk, Curb Ramp Not Required

3273 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3272 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 5Th St and Mace St $0.00

E Perpendicular

4378 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
87

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 13.0%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	114.0
Slope of the Ramp / Pad	(%)	**13.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.8**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4377 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**13.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.0**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**13.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4379 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
103

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**3.8**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.6**
Right Flare	(%)	**14.7**
Gutter Slope	(%)	**13.6**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4376 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.7
Right Flare	(%)	9.3
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 5Th St and N B St $27,500.00

E Under Construction

4380 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
50

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Under Construction

4381 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
50

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Under Construction

4382 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
50

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

W Under Construction

4383 Existing Curb Ramp

- *As-Built Description:*

At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 **11B-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
50

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : 5Th St and N C St

E Perpendicular

4216 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
110

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**8.9**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**14.3**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

4215 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
78

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Left: 11.3%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	**26.0**	**24.0**
Slope of the Ramp / Pad	(%)	**11.3**	6.8
X Slope of the Ramp / Pad	(%)	0.0	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	1.2
Top Landing X Slope	(%)	**2.9**	1.3
Length of Combo. Ramp	(in)	85.0	
Combo. Ramp Slope	(%)	8.2	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	64.0	
Bottom Landing Slope	(in)	**5.2**	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	**16.6**	
Right Flare	(%)	**15.0**	
Gutter Slope	(%)	4.5	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	2.2	2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4214 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
114

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 15.1%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**15.1**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.1
Left Flare	(%)	**13.8**
Right Flare	(%)	**13.9**
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	6.3 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4213 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
100

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.3**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 2.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 5Th St and S Lake St **$27,000.00**

Total Costs for Curb Ramps along : 5Th St **$105,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1329	6Th St	S B St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

4457 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	**17.1**
Right Flare	(%)	8.6
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4460 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.5**
Right Flare	(%)	7.8
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4458 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
82

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**13.1**
Right Flare	(%)	**13.0**
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.7 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4459 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
90

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**13.7**
Right Flare	(%)	**14.7**
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.7 4.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 6Th St and S B St **$26,000.00**

E Curb Ramp Required

4361 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

E Combination

4365 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	50.0	128.0
Slope of the Ramp / Pad	(%)	8.0	4.1
X Slope of the Ramp / Pad	(%)	0.9	**2.7**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.6
Top Landing X Slope	(%)	0.2	**3.4**
Length of Combo. Ramp	(in)	78.0	
Combo. Ramp Slope	(%)	8.3	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	51.0	
Bottom Landing Slope	(in)	1.8	
Bottom Landing X Slope	(in)	0.2	
Left Flare	(%)	7.8	
Right Flare	(%)	**10.9**	
Gutter Slope	(%)	**9.5**	
Gutter XSlope	(%)	1.9	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.4	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N No Sidewalk, Curb Ramp Not Required

4363 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Combination

4364 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.0% Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
87

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	94.0	107.0
Slope of the Ramp / Pad	(%)	4.7	5.0
X Slope of the Ramp / Pad	(%)	1.3	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	4.3
Top Landing X Slope	(%)	**5.0**	**2.4**
Length of Combo. Ramp	(in)	71.0	
Combo. Ramp Slope	(%)	6.8	
Combo. Ramp X Slope	(%)	1.7	
Bottom Landing Length	(in)	56.0	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	8.8	
Right Flare	(%)	9.5	
Gutter Slope	(%)	**17.4**	
Gutter XSlope	(%)	1.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.7	3.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Curb Ramp Required

4362 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

4366 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	121.0	120.0
Slope of the Ramp / Pad	(%)	4.6	2.3
X Slope of the Ramp / Pad	(%)	0.4	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.2**	0.9
Top Landing X Slope	(%)	1.2	**3.3**
Length of Combo. Ramp	(in)	78.0	
Combo. Ramp Slope	(%)	**10.8**	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.9	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	**10.9**	
Right Flare	(%)	9.3	
Gutter Slope	(%)	**10.7**	
Gutter XSlope	(%)	**2.9**	
Gutter Lip	(in)	**0.2**	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.7	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

4367 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
83

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	59.0	59.0
Slope of the Ramp / Pad	(%)	6.9	6.4
X Slope of the Ramp / Pad	(%)	1.4	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.8
Top Landing X Slope	(%)	0.6	**2.2**
Length of Combo. Ramp	(in)	75.0	
Combo. Ramp Slope	(%)	8.2	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	53.0	
Bottom Landing Slope	(in)	1.1	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	9.2	
Right Flare	(%)	**10.1**	
Gutter Slope	(%)	**10.9**	
Gutter XSlope	(%)	**2.1**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.7	3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 6Th St and S Lake St **$35,000.00**

E Curb Ramp Required

4355 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4354 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**15.1**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Curb Ramp Required

4356 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4357 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**7.8**
Top Landing X Slope	(%)	**3.6**

Left Flare	(%)	**10.6**
Right Flare	(%)	**19.2**
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	3.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : 6Th St and Vineyard Ave **$27,000.00**

Total Costs for Curb Ramps along : 6Th St **$88,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**903**	**7Th St**	**S Lake St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4451 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
103

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	**42.0**
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	**4.9**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**22.8**
Right Flare	(%)	**21.3**
Gutter Slope	(%)	**13.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4449 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
99

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**16.9**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**12.3**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 3.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4452 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
81

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**13.8**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W **Curb Ramp Required**

4450 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
155

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **7Th St** ***and*** **S Lake St** **$28,000.00**

Total Costs for Curb Ramps along : **7Th St** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1370	9Th St	S E St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

4248 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

N — No Sidewalk, Curb Ramp Not Required

4245 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

4246 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

W No Sidewalk, Curb Ramp Not Required

4247 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : 9Th St and S E St **$0.00**

E Parallel

4299 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	59.0
Length of Ramp / Pad	(in)	N/A	87.0
Slope of the Ramp / Pad	(%)	N/A	5.9
X Slope of the Ramp / Pad	(%)	N/A	**2.3**
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	1.3
Top Landing X Slope	(%)	N/A	1.2

Bottom Landing Length	(in)	80.0
Bottom Landing Slope	(%)	1.5
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	5.8	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

4300 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.1**
Right Flare	(%)	9.5
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

4301 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
139

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : 9Th St and S Lake St **$21,000.00**

Total Costs for Curb Ramps along : 9Th St **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	223	A St	Kenney Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3408 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**11.0**
Right Flare	(%)	8.3
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3409 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.4
Right Flare	(%)	**10.6**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3410 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : A St and Kenney Ct **$13,500.00**

NE Parallel

3414 Ramp Landing

CBC 2019 **11B-406.3.2**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

- *As-Built Description:*
  Running slope at bottom landing of existing parallel curb ramp exceeds 2%.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing bottom landing and provide new, including detectable warning surface. Ramp to remain.

Unit Cost **$3500.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	68.0	66.0
Length of Ramp / Pad	(in)	85.0	72.0
Slope of the Ramp / Pad	(%)	7.1	8.1
X Slope of the Ramp / Pad	(%)	1.7	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	1.4
Top Landing X Slope	(%)	1.1	0.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 2.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

3416 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1% Right: 4.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.0
Length of Ramp / Pad	(in)	81.0	104.0
Slope of the Ramp / Pad	(%)	4.3	**9.0**
X Slope of the Ramp / Pad	(%)	**2.1**	**4.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.3
Top Landing X Slope	(%)	**2.5**	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

3415 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : A St and Knox Ave $17,500.00

NE Parallel

3424 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 4.5% Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.0
Length of Ramp / Pad	(in)	104.0	95.0
Slope of the Ramp / Pad	(%)	4.5	8.1
X Slope of the Ramp / Pad	(%)	**4.5**	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.6
Top Landing X Slope	(%)	1.9	**3.7**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3427 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.6
Right Flare	(%)	**10.3**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

3425 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 3.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	77.0	66.0
Length of Ramp / Pad	(in)	84.0	93.0
Slope of the Ramp / Pad	(%)	**10.5**	3.7
X Slope of the Ramp / Pad	(%)	0.7	**3.7**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.3
Top Landing X Slope	(%)	**4.6**	**2.2**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	**3.6**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Parallel

3426 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
50

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.4% Right: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	65.0
Length of Ramp / Pad	(in)	91.0	91.0
Slope of the Ramp / Pad	(%)	5.5	6.6
X Slope of the Ramp / Pad	(%)	**2.4**	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	1.1
Top Landing X Slope	(%)	2.0	1.9

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : A St and Lake St **$27,500.00**

NW Perpendicular

3405 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
56

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.9
Right Flare	(%)	5.5
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.7	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3407 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3406 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.9
Right Flare	(%)	5.2
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : A St and Rd 28 **$3,500.00**

NE Parallel

3417 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	66.0
Length of Ramp / Pad	(in)	91.0	90.0
Slope of the Ramp / Pad	(%)	5.7	7.0
X Slope of the Ramp / Pad	(%)	1.1	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.0	0.1
Top Landing X Slope	(%)	**3.3**	1.9

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	2.0
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

3419 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	97.0	112.0
Length of Ramp / Pad	(in)	93.0	78.0
Slope of the Ramp / Pad	(%)	2.5	5.7
X Slope of the Ramp / Pad	(%)	**3.8**	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.5**	0.8
Top Landing X Slope	(%)	0.4	**2.5**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE **Curb Ramp Required**

3418 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : A St and Stinson Ave **$17,500.00**

Total Costs for Curb Ramps along : A St **$79,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	789	Adams Ave	E Ellis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1951 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — Perpendicular

1952 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
12

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.7
Right Flare	(%)	2.1
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1953 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	3.4
Right Flare	(%)	4.9
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	**3.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.7	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adams Ave *and* E Ellis St **$6,250.00**

NE Perpendicular

1982 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**4.5**

Left Flare	(%)	3.2
Right Flare	(%)	5.0
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1983 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.7
Right Flare	(%)	8.6
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

1981 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
29

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Adams Ave and E Kennedy St **$13,000.00**

NE Perpendicular

2032 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.4
Right Flare	(%)	3.9
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2033 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	48.5
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.2
Right Flare	(%)	3.9
Gutter Slope	(%)	**14.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **Curb Ramp Required**

2031 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Adams Ave** ***and*** **Eisenhower Ln** **$20,000.00**

N **Curb Ramp Required**

1987 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1988 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.8
Right Flare	(%)	3.0
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1989 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
18

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	5.9
Right Flare	(%)	1.3
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adams Ave and Tyler Ln **$13,250.00**

Total Costs for Curb Ramps along : Adams Ave **$52,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	259	Adanac Way	Adanac Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1998 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1999 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
9

Width of Ramp / Pad	(in)	48.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.4
Right Flare	(%)	7.5
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2000 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**10.3**
Right Flare	(%)	9.0
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adanac Way and Adanac Ct **$13,250.00**

NE Perpendicular

2017 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	**3.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	**11.0**
Right Flare	(%)	4.6
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2018 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
25

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**3.9**

Left Flare	(%)	4.5
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2016 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adanac Way and Dominguez Dr **$20,000.00**

NE Perpendicular

2007 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.6
Right Flare	(%)	**11.9**
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2006 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 13.2% Right: 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
24

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**13.2**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2004 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.3**
Right Flare	(%)	4.3
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2005 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
12

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.1
Right Flare	(%)	7.2
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adanac Way and Jericho Dr **$15,750.00**

NE Perpendicular

2094 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
15

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	52.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.1
Right Flare	(%)	1.8
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2095 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
14

Width of Ramp / Pad	(in)	49.5
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.2
Right Flare	(%)	7.3
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.5	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2097 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.5
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	8.7
Right Flare	(%)	5.2
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2096 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	4.8
Right Flare	(%)	7.3
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adanac Way and Jesse Dr **$18,000.00**

E Curb Ramp Required

1995 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1997 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

- *Notes:* Remove weeds on right flare.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.5
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.2
Right Flare	(%)	4.0
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	2.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1996 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	4.6
Right Flare	(%)	6.3
Gutter Slope	(%)	**13.5**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adanac Way and Madison Dr **$16,750.00**

Total Costs for Curb Ramps along : Adanac Way **$83,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	434	Adelaide Ave	Canal St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4315 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.5**
Right Flare	(%)	5.2
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

4313 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
129

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

4314 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.2
Right Flare	(%)	**13.3**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	**3.9**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adelaide Ave and Canal St **$21,000.00**

E Perpendicular

3370 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
27

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.9
Right Flare	(%)	5.9
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3372 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.9
Right Flare	(%)	7.9
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

3371 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adelaide Ave and Sawmill St **$16,000.00**

Total Costs for Curb Ramps along : Adelaide Ave **$37,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	364	Adell St	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3949 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

NW — No Sidewalk, Curb Ramp Not Required

3948 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE No Sidewalk, Curb Ramp Not Required

3950 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3951 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adell St and Austin Ave **$0.00**

N Curb Ramp Required

3876 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
105

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

3877 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	59.0
Length of Ramp / Pad	(in)	61.0	108.0
Slope of the Ramp / Pad	(%)	5.7	7.8
X Slope of the Ramp / Pad	(%)	1.6	0.5
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	2.3	N/A
Top Landing X Slope	(%)	1.6	N/A

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	**2.2**
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.3	0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

3878 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 34.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	54.0
Length of Ramp / Pad	(in)	76.0	62.0
Slope of the Ramp / Pad	(%)	7.0	5.3
X Slope of the Ramp / Pad	(%)	0.4	0.2
Top Landing Length	(in)	**34.0**	48.0
Top Landing Slope	(%)	**4.9**	0.8
Top Landing X Slope	(%)	**2.3**	1.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.7
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	3.7	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Adell St *and* Country Club Dr — $13,500.00

NE No Sidewalk, Curb Ramp Not Required

3945 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3946 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
15

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE No Sidewalk, Curb Ramp Not Required

3944 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW Perpendicular

3947 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 22.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**22.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.4
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adell St and N D St $7,000.00

N Parallel

3893 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)	72.0	72.0
Length of Ramp / Pad	(in)	72.0	72.0
Slope of the Ramp / Pad	(%)	5.8	6.8
X Slope of the Ramp / Pad	(%)	1.4	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	1.2
Top Landing X Slope	(%)	0.9	1.0

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3892 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	66.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	**4.5**

Left Flare	(%)	**10.1**
Right Flare	(%)	6.1
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3894 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	121.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.0
Right Flare	(%)	4.2
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.7 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Adell St and Sonora St **$16,500.00**

Total Costs for Curb Ramps along : Adell St **$37,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	821	Airport Dr	Aviation Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
E	Perpendicular			

3807 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.1
Right Flare	(%)	7.2
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	7.6 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Driveway

3806 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3808 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
17

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Airport Dr and Aviation Dr **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

3786 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3788 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.1**
Right Flare	(%)	10.0
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

3787 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
105

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Airport Dr** ***and*** **Yeager Rd** **$10,250.00**

Total Costs for Curb Ramps along : **Airport Dr** **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	968	Alderwood Ct	N Schnoor Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NW	Perpendicular			

2436 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.4**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2437 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	**41.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.0
Right Flare	(%)	**10.7**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Alderwood Ct and N Schnoor Ave **$13,000.00**

Total Costs for Curb Ramps along : Alderwood Ct **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1447	Almond Ave	Commerce Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1910 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — Curb Ramp Required

1911 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
113

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1912 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1913 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	56.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**13.1**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Almond Ave and Commerce Dr **$13,500.00**

NE Perpendicular

2886 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	3.3
Right Flare	(%)	5.6
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8	1.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2885 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.4
Right Flare	(%)	3.9
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2883 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.8
Right Flare	(%)	4.5
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2884 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 4.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	**4.1**

Left Flare	(%)	3.8
Right Flare	(%)	7.9
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0 0.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Almond Ave and Emily Way **$15,750.00**

NE Perpendicular

2928 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.6
Right Flare	(%)	7.1
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2929 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.7
Right Flare	(%)	4.8
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.3 2.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2926 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.6
Right Flare	(%)	5.3
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2927 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.5
Right Flare	(%)	6.8
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**19.0**

Street Grade (Left / Right)	(%)	0.9 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Almond Ave and Gateway Dr **$18,500.00**

NE Perpendicular

334 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.6
Right Flare	(%)	6.9
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

335 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.4
Right Flare	(%)	4.8
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

337 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.5
Slope of the Ramp / Pad	(%)	**13.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.5
Right Flare	(%)	6.9
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

336 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	6.3
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.8
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Almond Ave and Oakridge Dr **$27,000.00**

NE No Sidewalk, Curb Ramp Not Required

2772 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2773 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2774 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Almond Ave** ***and*** **Pine St** **$0.00**

NW **No Sidewalk, Curb Ramp Not Required**

2795 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2793 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.0
Right Flare	(%)	2.9
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2794 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.2
Right Flare	(%)	6.0
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Almond Ave and Rubicon Ave **$6,000.00**

NE Perpendicular

332 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.0
Right Flare	(%)	9.4
Gutter Slope	(%)	**14.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

333 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.0
Right Flare	(%)	8.1
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

331 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
123

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Almond Ave *and* Santa Bonita St $20,000.00

NE Perpendicular

1916 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.6
Right Flare	(%)	7.0
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.5**

Street Grade (Left / Right)	(%)	0.4	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

1914 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1915 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Almond Ave** ***and*** **Schnoor Ave** **$10,000.00**

NE Perpendicular

403 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	58.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.4
Right Flare	(%)	7.8
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

400 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

402 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	8.9
Right Flare	(%)	5.7
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

401 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.2
Right Flare	(%)	4.2
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 3.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Almond Ave and Stadium Rd **$12,500.00**

Total Costs for Curb Ramps along : Almond Ave **$123,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	709	Amerine Ave	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

533 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

530 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

532 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

531 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Amerine Ave** ***and*** **Fifth St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

536 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

537 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

535 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

534 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Amerine Ave** ***and*** **Fourth St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

539 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

540 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

538 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

541 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Amerine Ave** ***and*** **Jennings St** **$0.00**

NW Perpendicular

542 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.7% Right: 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.7**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

544 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

543 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Amerine Ave and Third St **$3,250.00**

Total Costs for Curb Ramps along : Amerine Ave **$3,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	176	Amy Ave	Kathryn Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2081 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2082 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.7
Right Flare	(%)	2.4
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2083 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.0

Left Flare	(%)	6.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Amy Ave and Kathryn Ave **$13,000.00**

Total Costs for Curb Ramps along : Amy Ave **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	571	Angel Falls Ct	Capistrano Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2601 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
2

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.0
Right Flare	(%)	8.7
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	13.0

Street Grade (Left / Right)	(%)	1.0	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2602 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
2

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.8
Right Flare	(%)	8.7
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	0.3	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2603 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Angel Falls Ct and Capistrano Dr **$20,000.00**

Total Costs for Curb Ramps along : Angel Falls Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	675	Anna Ave	Carmen Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2075 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2077 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.4
Right Flare	(%)	4.6
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2076 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
28

Width of Ramp / Pad	(in)	59.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.7
Right Flare	(%)	6.8
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Anna Ave and Carmen Ave **$13,500.00**

Total Costs for Curb Ramps along : Anna Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	555	Apple Tree Dr	Toschi Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2687 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.8
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2686 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
25

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**14.1**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**10.1**
Right Flare	(%)	6.9
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.6 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2688 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	**46.5**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**10.7**
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2685 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Apple Tree Dr and Toschi Dr **$26,000.00**

Total Costs for Curb Ramps along : Apple Tree Dr **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1012	Aram Ave	Joy St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

878 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

877 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

879 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aram Ave and Joy St **$0.00**

E Curb Ramp Required

876 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

874 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

875 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aram Ave and W Central Ave **$14,000.00**

Total Costs for Curb Ramps along : Aram Ave **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1058	Arbella Ln	Frederick Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2503 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.7
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2505 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2504 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**12.0**
Right Flare	(%)	7.3
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Arbella Ln and Frederick Way **$20,000.00**

Total Costs for Curb Ramps along : Arbella Ln **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1582	Ardilla Dr	Bridge Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3395 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — Perpendicular

3385 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 12.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	4.0	
Right Flare	(%)	6.2	
Gutter Slope	(%)	**12.5**	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**10.0**	

Street Grade (Left / Right)	(%)	2.4	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3386 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ardilla Dr and Bridge Way $17,000.00

NE Perpendicular

3092 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.7
Right Flare	(%)	7.4
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.3	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3093 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.2
Right Flare	(%)	3.8
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.4	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3091 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.8**
Right Flare	(%)	7.8
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	**3.5**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3090 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.4
Right Flare	(%)	6.0
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.5 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ardilla Dr and Knox St $22,750.00

NE Curb Ramp Required

3378 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3377 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.7
Right Flare	(%)	6.9
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3376 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.7
Right Flare	(%)	7.4
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.3 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ardilla Dr and Mariposa St **$13,000.00**

NE Perpendicular

3383 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.2
Right Flare	(%)	3.1
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3382 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.8
Right Flare	(%)	3.6
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.6	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE **Curb Ramp Required**

3384 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ardilla Dr** ***and*** **Monarch Rd** **$12,000.00**

Total Costs for Curb Ramps along : **Ardilla Dr** **$64,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1482	Aries Ct	Glenville Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2324 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2322 Gutter

- *As-Built Description:*
  The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
10

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.4
Right Flare	(%)	8.5
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2323 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.4
Right Flare	(%)	**10.6**
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aries Ct and Glenville Ave **$16,500.00**

Total Costs for Curb Ramps along : Aries Ct **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	665	Ashbury Ct	Glenville Ave

NE — Curb Ramp Required

2313 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2314 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 11.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	5.1
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2315 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.9

Left Flare	(%)	7.8
Right Flare	(%)	9.0
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Ashbury Ct and Glenville Ave **$16,500.00**

Total Costs for Curb Ramps along : Ashbury Ct **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	854	Ashlan Way	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3956 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 22.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**22.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**13.6**
Right Flare	(%)	6.6
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3957 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	3.7
Right Flare	(%)	3.4
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3955 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ashlan Way and Austin Ave **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

2238 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2235 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2237 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2236 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ashlan Way** ***and*** **Fresno St** **$0.00**

N Curb Ramp Required

3909 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3908 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.2**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3910 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.7**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Ashlan Way and Lucia Way $20,000.00

E Curb Ramp Required

3980 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Perpendicular

3990 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**14.0**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.2
Right Flare	(%)	9.1
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3981 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.8
Right Flare	(%)	**10.2**
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 2.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3988 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
67

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	**46.0**
Slope of the Ramp / Pad	(%)	**14.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**12.7**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3979 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	87.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	56.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.5**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3989 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ashlan Way and N D St $37,750.00

NE Perpendicular

3982 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.6
Right Flare	(%)	6.9
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3984 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.6**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3983 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ashlan Way and Noreen Way **$16,500.00**

NE Perpendicular

3907 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.9
Right Flare	(%)	9.5
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3905 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.9
Right Flare	(%)	9.5
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

3906 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ashlan Way and Popoli Way $20,000.00

E No Sidewalk, Curb Ramp Not Required

2239 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2241 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2240 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ashlan Way** ***and*** **Rogers St** **$0.00**

Total Costs for Curb Ramps along : **Ashlan Way** **$115,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1538	Aspen Ln	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2463 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	8.8
Right Flare	(%)	**15.0**
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2462 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.3**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**12.4**
Right Flare	(%)	7.4
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2461 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and **$20,000.00**

NE Perpendicular

2467 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
40

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.2
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2466 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.3
Right Flare	(%)	8.5
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2464 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.6
Right Flare	(%)	6.4
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.5 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2465 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.0
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and Beechwood Way **$22,750.00**

NE Driveway

2424 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2423 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**14.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.7
Right Flare	(%)	4.5
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2422 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.8
Right Flare	(%)	6.4
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and Foxglove Way $13,000.00

NE Perpendicular

2470 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.8
Right Flare	(%)	7.3
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2471 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	6.0
Right Flare	(%)	9.5
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2469 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**14.9**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	**10.9**
Right Flare	(%)	7.0
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2468 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.1
Right Flare	(%)	4.7
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and Grapewood Way $26,000.00

NW Perpendicular

2460 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.6**
Right Flare	(%)	10.0
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2458 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2459 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**12.4**
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Aspen Ln and Meadowrest Way **$20,000.00**

NE Curb Ramp Required

2474 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2473 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.6
Right Flare	(%)	6.4
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2472 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.8
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and Plumwood Way $20,000.00

NE Perpendicular

2455 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.2
Right Flare	(%)	8.1
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

2456 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8% Right: 2.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	92.0
Length of Ramp / Pad	(in)	56.0	48.0
Slope of the Ramp / Pad	(%)	5.5	2.8
X Slope of the Ramp / Pad	(%)	**2.8**	**2.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**3.9**	0.4
Top Landing X Slope	(%)	**2.2**	0.4

Bottom Landing Length	(in)	50.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	1.6
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2457 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aspen Ln and W Cleveland Ave **$13,500.00**

Total Costs for Curb Ramps along : Aspen Ln **$135,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	598	Asti Way	N D St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

3995 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3994 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.2
Right Flare	(%)	8.0
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3996 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	54.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**11.9**
Right Flare	(%)	7.0
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 4.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Asti Way and N D St **$13,500.00**

Total Costs for Curb Ramps along : Asti Way **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1115	Austin Ave	Ashlan Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3958 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3959 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
85

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**12.9**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	2.9
Right Flare	(%)	**10.3**
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	**7.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.8	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3960 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
81

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.6
Right Flare	(%)	6.6
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5 5.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave and Ashlan Way $21,000.00

E Curb Ramp Required

3952 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3953 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
105

Width of Ramp / Pad	(in)	80.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**7.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**8.6**

Left Flare	(%)	3.8
Right Flare	(%)	**17.7**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	**5.7**
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.4 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3954 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	**5.9**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.9
Right Flare	(%)	3.4
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	**4.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 5.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave and E Clark St **$20,500.00**

NE Parallel

4156 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 10.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
85

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	51.0
Length of Ramp / Pad	(in)	72.0	72.0
Slope of the Ramp / Pad	(%)	**10.7**	7.2
X Slope of the Ramp / Pad	(%)	1.4	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	1.0
Top Landing X Slope	(%)	**2.3**	1.3

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**3.4**
Bottom Landing X Slope	(%)	**2.5**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

4155 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	77.0	76.0
Slope of the Ramp / Pad	(%)	6.2	6.6
X Slope of the Ramp / Pad	(%)	1.0	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.7
Top Landing X Slope	(%)	0.2	1.1

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	0.1
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

4157 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 7.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**7.0**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	3.8
Right Flare	(%)	6.7
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	4.7	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Parallel

4158 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 3.3%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	81.0	77.0
Slope of the Ramp / Pad	(%)	4.7	7.0
X Slope of the Ramp / Pad	(%)	0.3	**3.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	**2.9**
Top Landing X Slope	(%)	0.3	0.4

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	**3.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Austin Ave and E Cleveland Ave **$24,250.00**

NE Perpendicular

1276 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.7**
Right Flare	(%)	7.2
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

NW Perpendicular

1277 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
65

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.6
Right Flare	(%)	6.2
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.8 3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SE Perpendicular

1279 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	102.5
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.5
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1278 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave and E Lincoln Ave **$19,500.00**

NE Perpendicular

1373 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 21.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
78

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**21.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.2
Right Flare	(%)	9.8
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1372 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 22.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
78

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**22.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.9
Right Flare	(%)	4.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1371 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave *and* Green Way — $14,000.00

NE Perpendicular

1375 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	**12.7**
Right Flare	(%)	6.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1376 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.2
Right Flare	(%)	7.9
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	5.4 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1374 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.4**
Right Flare	(%)	**15.4**
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	6.9 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1377 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.3
Right Flare	(%)	9.2
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave *and* W Sherwood Way **$22,500.00**

NE Parallel

1280 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 13.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	60.0
Length of Ramp / Pad	(in)	108.0	220.0
Slope of the Ramp / Pad	(%)	6.1	7.7
X Slope of the Ramp / Pad	(%)	0.6	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	1.4
Top Landing X Slope	(%)	0.8	0.9

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**13.5**
Gutter XSlope	(%)	**8.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.0 4.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1281 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.1**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1283 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	6.5
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	**3.7**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1282 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
71

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.8**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**12.3**
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave and W South St $19,250.00

NE Perpendicular

3967 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.2
Right Flare	(%)	8.0
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3969 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
70

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**10.6**
Right Flare	(%)	7.3
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3968 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Austin Ave and Wessmith Way **$21,000.00**

Total Costs for Curb Ramps along : Austin Ave **$162,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1246	Autumn Rd	National Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1634 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

1636 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1635 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Autumn Rd and National Ave **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1745 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1746 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1747 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Autumn Rd** ***and*** **Summer St** **$0.00**

N No Sidewalk, Curb Ramp Not Required

1633 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1631 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1632 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Autumn Rd** ***and*** **Sunnydale St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1748 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1749 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1750 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Autumn Rd and Winter Way **$0.00**

Total Costs for Curb Ramps along : Autumn Rd **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1086	Avalon Ave	Kelsey Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

1554 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

1559 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	10.0
Right Flare	(%)	9.1
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1556 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.3
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1558 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.9**
Right Flare	(%)	8.3
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1555 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
54

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**10.9**
Right Flare	(%)	8.9
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

1557 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Avalon Ave and Kelsey Ln **$33,500.00**

Total Costs for Curb Ramps along : Avalon Ave **$33,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1455	Ave 13	Granada Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2566 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

NW — No Sidewalk, Curb Ramp Not Required

2565 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE No Sidewalk, Curb Ramp Not Required

2563 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

2564 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

***Total Costs for Curb Ramps at :* Ave 13 *and* Granada Dr** **$0.00**

***Total Costs for Curb Ramps along :* Ave 13** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1057	Ave 13 1/2	Westberry Bvd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2573 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 15.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
23

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**15.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.2
Right Flare	(%)	6.7
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

2575 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE **No Sidewalk, Curb Ramp Not Required**

2574 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ave 13 1/2** ***and*** **Westberry Bvd** **$6,500.00**

Total Costs for Curb Ramps along : **Ave 13 1/2** **$6,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1181	Ave 14 1/2	Sunset Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1382 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — No Sidewalk, Curb Ramp Not Required

1383 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Ave 14 1/2 and Sunset Ave **$0.00**

Total Costs for Curb Ramps along : Ave 14 1/2 **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	107	Ave 17	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3781 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — No Sidewalk, Curb Ramp Not Required

3784 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3780 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3783 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3782 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3785 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ave 17 and **$0.00**

NE Curb Ramp Required

3779 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3778 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE Perpendicular

3776 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
31

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.5
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3777 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
17

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	10.0
Right Flare	(%)	8.5
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ave 17 and Airport Dr **$20,500.00**

Total Costs for Curb Ramps along : Ave 17 **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	214	Aviation Dr	Condor Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N Driveway

3797 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3798 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aviation Dr ***and*** Condor Rd **$0.00**

E No Sidewalk, Curb Ramp Not Required

3794 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3796 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3795 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Aviation Dr and Falcon Dr **$0.00**

Total Costs for Curb Ramps along : Aviation Dr **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	405	Avila Way	Fig Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3195 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.8
Right Flare	(%)	6.9
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Parallel

3193 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
38

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 9.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	66.0
Length of Ramp / Pad	(in)	63.0	62.0
Slope of the Ramp / Pad	(%)	**9.8**	6.1
X Slope of the Ramp / Pad	(%)	**2.8**	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	**2.3**
Top Landing X Slope	(%)	2.0	1.9

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3194 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Avila Way and Fig Ave **$17,000.00**

Total Costs for Curb Ramps along : Avila Way **$17,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	102	Awahnee Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

345 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

347 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	57.5
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

346 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.7

Left Flare	(%)	6.2
Right Flare	(%)	5.8
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Awahnee Ct and Monterey St **$16,500.00**

Total Costs for Curb Ramps along : Awahnee Ct **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	396	Azure Dr	Ivory Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

4433 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
21

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.1**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.5 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4432 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**11.2**
Right Flare	(%)	6.2
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

4431 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Azure Dr and Ivory Ct **$21,000.00**

Total Costs for Curb Ramps along : Azure Dr **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	464	Barcelona Way	Wessmith Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

2151 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2153 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	4.6
Right Flare	(%)	7.9
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2152 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
49

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	6.3
Right Flare	(%)	2.7
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Barcelona Way and Wessmith Way **$16,750.00**

Total Costs for Curb Ramps along : Barcelona Way **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1236	Baron St	Liberty Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1388 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	49.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.4
Right Flare	(%)	6.4
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1389 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	49.0
Slope of the Ramp / Pad	(%)	**14.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.4
Right Flare	(%)	**11.9**
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1387 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Baron St and Liberty Ln **$20,000.00**

Total Costs for Curb Ramps along : Baron St **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1163	Barsotti Ave	N Park Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

930 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

931 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

932 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Barsotti Ave** ***and*** **N Park Dr** **$0.00**

E No Sidewalk, Curb Ramp Not Required

933 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

934 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

935 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Barsotti Ave and Ula St **$7,000.00**

Total Costs for Curb Ramps along : Barsotti Ave **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	362	Bay Ct	Mainberry Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

639 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**14.9**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.0**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

641 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
45

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**12.5**
Right Flare	(%)	8.6
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

640 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Bay Ct and Mainberry Dr **$21,000.00**

Total Costs for Curb Ramps along : Bay Ct **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	230	Bay View Dr	Harbor Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

676 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W — Perpendicular

675 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 39.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
52

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.3
Right Flare	(%)	10.0
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Bay View Dr and Harbor Dr **$14,000.00**

NE Perpendicular

653 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.3**
Right Flare	(%)	8.9
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

655 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 10.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	**10.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**4.4**

Left Flare	(%)	**16.9**
Right Flare	(%)	5.8
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	**12.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	3.2 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

652 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 28.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**28.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	3.0
Right Flare	(%)	9.1
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

654 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	**11.7**
Right Flare	(%)	**19.3**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**5.6**
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Bay View Dr and Mainberry Dr **$27,500.00**

Total Costs for Curb Ramps along : **Bay View Dr** **$41,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1109	Baylor Ct	Jefferson Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

868 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.3
Right Flare	(%)	**11.5**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

870 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.8
Right Flare	(%)	9.8
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

869 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Baylor Ct and Jefferson Ave **$21,000.00**

Total Costs for Curb Ramps along : Baylor Ct **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	210	Bent Oak Tr	Crown Terrace

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2777 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
40

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 10.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.0

Left Flare	(%)	4.8
Right Flare	(%)	6.7
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	2.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2778 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
40

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	5.3
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2779 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Bent Oak Tr** ***and*** **Crown Terrace** **$8,000.00**

NW Perpendicular

2780 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	6.9
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2781 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Bent Oak Tr** ***and*** **Ivy Glen Dr** **$10,000.00**

NE Curb Ramp Required

2776 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2775 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.5
Right Flare	(%)	5.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Bent Oak Tr** ***and*** **Orchard Hill Dr** **$10,000.00**

Total Costs for Curb Ramps along : **Bent Oak Tr** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1549	Bernardi Ave	Munra Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Perpendicular

2830 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.4
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.2
Right Flare	(%)	6.1
Gutter Slope	(%)	8.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.25
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	12.0

Street Grade (Left / Right)	(%)	1.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2831 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Bernardi Ave and Munra Ave **$13,500.00**

NE Perpendicular

2832 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.7
Right Flare	(%)	5.2
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2833 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.8
Right Flare	(%)	4.6
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2834 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Bernardi Ave** ***and*** **Stadium Rd** **$13,000.00**

Total Costs for Curb Ramps along : **Bernardi Ave** **$26,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	88	Berry Dr	Apple Tree Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2668 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.0
Right Flare	(%)	6.8
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2669 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
13

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.8
Right Flare	(%)	4.5
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2670 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Apple Tree Dr **$20,000.00**

NE Perpendicular

2674 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	2.0

Left Flare	(%)	3.8
Right Flare	(%)	6.5
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2675 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Cherry Tree Dr **$13,500.00**

S No Sidewalk, Curb Ramp Not Required

1772 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr *and* Howard Rd **$0.00**

NE Perpendicular

2671 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.1%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
2

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.4
Right Flare	(%)	5.9
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2672 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
5

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.8
Right Flare	(%)	6.2
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2673 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Orange Tree Dr **$20,000.00**

NE Perpendicular

2665 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.9
Right Flare	(%)	7.8
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3 2.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2666 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.
- *Notes:* 1.0 in lip where gutter and BL meet

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
5

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.9
Right Flare	(%)	5.0
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.7 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2667 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Peanut Dr **$20,000.00**

E No Sidewalk, Curb Ramp Not Required

1767 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1766 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1765 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Berry Dr** ***and*** **Summer St** **$0.00**

N No Sidewalk, Curb Ramp Not Required

1738 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1736 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1737 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Westgate Dr **$0.00**

E No Sidewalk, Curb Ramp Not Required

1762 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1763 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1764 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Berry Dr and Winter Way **$0.00**

Total Costs for Curb Ramps along : Berry Dr **$73,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	594	Berry Drive	Plumas Street

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1882 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1883 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
6

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.1
Right Flare	(%)	7.3
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1884 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
6

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.7
Right Flare	(%)	7.2
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Berry Drive and Plumas Street **$20,000.00**

Total Costs for Curb Ramps along : Berry Drive **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	310	Bilbao Ct	San Sebastian Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2179 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	75.5
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.9
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2180 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.2
Right Flare	(%)	5.3
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

2178 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Bilbao Ct and San Sebastian Way **$13,250.00**

Total Costs for Curb Ramps along : Bilbao Ct **$13,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	451	Bloker St	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

4162 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Parallel

4164 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 8.8% Right: 8.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	78.0	79.0
Slope of the Ramp / Pad	(%)	**8.8**	**8.4**
X Slope of the Ramp / Pad	(%)	0.9	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	1.8
Top Landing X Slope	(%)	**2.4**	1.9

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

4163 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
71

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	65.0
Length of Ramp / Pad	(in)	72.0	81.0
Slope of the Ramp / Pad	(%)	7.8	5.4
X Slope of the Ramp / Pad	(%)	1.4	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	0.9
Top Landing X Slope	(%)	1.7	**3.1**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Bloker St *and* E Cleveland Ave — $10,500.00

NE Perpendicular

1263 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	112.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.8
Right Flare	(%)	4.2
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1262 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	113.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.2
Right Flare	(%)	6.0
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1264 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority

54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	110.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.1
Right Flare	(%)	5.1
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1265 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	109.5
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	8.4
Right Flare	(%)	8.9
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Bloker St *and* E Lincoln Ave **$16,250.00**

NE No Sidewalk, Curb Ramp Not Required

1260 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1259 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1261 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

1258 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Bloker St** ***and*** **Rush St** **$0.00**

Total Costs for Curb Ramps along : **Bloker St** **$26,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	196	Blueberry Ln	E Almond Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

3536 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	2.7
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3538 Ramp Landing

• *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
52

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	10.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.1
Right Flare	(%)	7.0
Gutter Slope	(%)	12.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	0.6 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

3537 Access Route

• *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Blueberry Ln and E Almond Ave **$20,500.00**

NE Curb Ramp Required

3534 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3533 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 12.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.4
Right Flare	(%)	3.6
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.8	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3535 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.4
Right Flare	(%)	4.8
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.1 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Blueberry Ln and Madarin St **$16,500.00**

Total Costs for Curb Ramps along : Blueberry Ln **$37,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1513	Blueridge Dr	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SE Perpendicular

411 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.1
Right Flare	(%)	4.4
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	3.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Blueridge Dr and **$3,250.00**

NE Perpendicular

409 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

410 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.5
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.8**
Right Flare	(%)	2.2
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

408 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Blueridge Dr** ***and*** **Deerwood Dr** **$20,000.00**

E Curb Ramp Required

323 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

324 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.4**
Right Flare	(%)	9.6
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

325 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.6
Right Flare	(%)	6.8
Gutter Slope	(%)	**13.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Blueridge Dr and Santa Bonita St **$13,500.00**

Total Costs for Curb Ramps along : **Blueridge Dr** **$36,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	648	Bo Tree Ln	Majestic Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2919 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2918 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.9
Right Flare	(%)	4.1
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.3	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2917 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	6.5
Right Flare	(%)	6.4
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	3.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Bo Tree Ln** ***and*** **Majestic Way** **$16,500.00**

Total Costs for Curb Ramps along : **Bo Tree Ln** **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1222	Boles St	Second St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3811 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW — No Sidewalk, Curb Ramp Not Required

3810 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

S No Sidewalk, Curb Ramp Not Required

3809 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Boles St and Second St **$0.00**

Total Costs for Curb Ramps along : Boles St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	631	Bolinas Way	Orchard Hill Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2800 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2799 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.0
Right Flare	(%)	5.0
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2798 Ramp Transition

- *As-Built Description:*

  Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.2
Right Flare	(%)	7.0
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Bolinas Way and Orchard Hill Dr **$12,000.00**

Total Costs for Curb Ramps along : Bolinas Way **$12,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1068	Boulder Ave	Boulder Pl

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1494 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1496 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.7**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	
Dome Setback	(in)	

Street Grade (Left / Right)	(%)	0.5	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1495 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	10.0
Right Flare	(%)	8.4
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Boulder Ave and Boulder Pl **$20,500.00**

Total Costs for Curb Ramps along : Boulder Ave **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1583	Bridge Way	Dome Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SW **Perpendicular**

3394 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.2
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Bridge Way** ***and*** **Dome Ave** **$3,000.00**

Total Costs for Curb Ramps along : **Bridge Way** **$3,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	667	Briquel Ave	Carmen Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2073 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
34

Width of Ramp / Pad	(in)	69.5
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.2**
Top Landing X Slope	(%)	**3.6**

Left Flare	(%)	6.2
Right Flare	(%)	2.4
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2074 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	2.7
Right Flare	(%)	5.5
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	3.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2072 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Briquel Ave and Carmen Ave **$13,500.00**

Total Costs for Curb Ramps along : Briquel Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1097	Bruce St	Foster Ave

NE — No Sidewalk, Curb Ramp Not Required

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

925 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

926 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

924 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Bruce St** ***and*** **Foster Ave** **$0.00**

Total Costs for Curb Ramps along : **Bruce St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	243	Caitlan Dr	Buena Ventura Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1414 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
21

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.6
Right Flare	(%)	9.8
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1416 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
19

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	9.0
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1415 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Caitlan Dr and Buena Ventura Ct **$21,000.00**

E Curb Ramp Required

1411 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1412 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
22

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.7
Right Flare	(%)	**10.7**
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1413 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
27

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.7
Right Flare	(%)	**10.5**
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Caitlan Dr and Fiesta Dr **$21,000.00**

NE Perpendicular

1417 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.0
Right Flare	(%)	9.8
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1418 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.4
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1420 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
41

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**15.1**
Right Flare	(%)	7.5
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1419 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**12.6**
Right Flare	(%)	7.7
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Caitlan Dr *and* Isla Vista Ct** **$28,000.00**

NE Perpendicular

1408 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.1
Right Flare	(%)	8.3
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.2 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1410 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.7**
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1409 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Caitlan Dr and Los Osos Ct **$21,000.00**

N No Sidewalk, Curb Ramp Not Required

1406 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1405 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	9.8
Right Flare	(%)	**14.1**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1407 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.8**
Right Flare	(%)	7.1
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Caitlan Dr** ***and*** **Riverview Dr** **$14,000.00**

Total Costs for Curb Ramps along : **Caitlan Dr** **$105,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1479	Caitlan Drive	Via Capitola

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1425 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.2
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1426 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
29

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.5
Right Flare	(%)	7.0
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

1424 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Caitlan Drive and Via Capitola **$14,000.00**

NE Perpendicular

1422 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**10.5**
Right Flare	(%)	9.3
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1423 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	9.9
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

1421 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Caitlan Drive** ***and*** **Via De Oro** **$14,000.00**

Total Costs for Curb Ramps along : **Caitlan Drive** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	800	California Ave	N Park Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

951 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

950 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

952 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

949 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **California Ave** ***and*** **N Park Dr** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

903 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

901 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

902 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **California Ave** ***and*** **N Pine St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

947 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

948 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

946 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **California Ave** ***and*** **Redwood Dr** **$0.00**

Total Costs for Curb Ramps along : **California Ave** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	190	Calimyrna Ave	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

4059 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	54.0
Length of Ramp / Pad	(in)	80.0	75.0
Slope of the Ramp / Pad	(%)	5.6	6.1
X Slope of the Ramp / Pad	(%)	1.9	**2.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.2	1.2
Top Landing X Slope	(%)	**3.8**	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.3**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4060 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 4.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	54.0
Length of Ramp / Pad	(in)	74.0	70.0
Slope of the Ramp / Pad	(%)	5.6	6.0
X Slope of the Ramp / Pad	(%)	**4.9**	2.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.6
Top Landing X Slope	(%)	**2.1**	**2.2**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.5
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4058 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Calimyrna Ave and E Cleveland Ave **$21,000.00**

N No Sidewalk, Curb Ramp Not Required

2212 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2214 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2213 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Calimyrna Ave** ***and*** **Mission Ave** **$0.00**

Total Costs for Curb Ramps along : **Calimyrna Ave** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**809**	**Cambria Ave**	**Zak Way**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1550 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
34

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.5
Right Flare	(%)	5.0
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1549 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	77.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.6
Right Flare	(%)	9.7
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1548 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cambria Ave and Zak Way **$20,500.00**

Total Costs for Curb Ramps along : Cambria Ave **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1311	Canal St	Lilly St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3251 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.1
Right Flare	(%)	9.4
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

3250 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 43.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	72.0
Length of Ramp / Pad	(in)	59.0	76.0
Slope of the Ramp / Pad	(%)	8.1	7.2
X Slope of the Ramp / Pad	(%)	2.0	2.0
Top Landing Length	(in)	**43.0**	48.0
Top Landing Slope	(%)	0.3	0.5
Top Landing X Slope	(%)	**2.4**	0.5

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3252 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
29

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.6
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3253 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.3
Right Flare	(%)	8.6
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Canal St and Lilly St $16,000.00

E Perpendicular

4312 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.1
Right Flare	(%)	6.9
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4311 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 41.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**41.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.5
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4309 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.1
Right Flare	(%)	**14.0**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	**4.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	9.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4310 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.3
Right Flare	(%)	8.5
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Canal St and Vineyard Ave **$27,500.00**

Total Costs for Curb Ramps along : Canal St **$43,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	649	Capistrano Dr	S Timberline Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2604 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 11.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Priority
0

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.0
Right Flare	(%)	6.6
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.6	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2605 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.5
Right Flare	(%)	6.4
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2606 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Capistrano Dr** ***and*** **S Timberline Dr** **$8,000.00**

Total Costs for Curb Ramps along : **Capistrano Dr** **$8,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1576	Carmel St	Fritz St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3160 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3159 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.5
Right Flare	(%)	4.8
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Carmel St and Fritz St **$13,500.00**

Total Costs for Curb Ramps along : Carmel St **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	692	Carmen Ave	Merced St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2113 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.9
Right Flare	(%)	4.1
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2112 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
30

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	64.5
Slope of the Ramp / Pad	(%)	4.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.3
Right Flare	(%)	4.1
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

2111 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Carmen Ave and Merced St **$13,500.00**

Total Costs for Curb Ramps along : Carmen Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1159**	**Cedar Creek Ln**	**Sultana Dr**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1539 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.2
Right Flare	(%)	7.5
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	6.6	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1538 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.7
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1540 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cedar Creek Ln and Sultana Dr **$21,000.00**

Total Costs for Curb Ramps along : Cedar Creek Ln **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1183	Central Ave	2Nd St

N — Curb Ramp Required

3848 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
133

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3847 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 11.2% Right: 10.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.2**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.8 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3849 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	7.4
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.3	1.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Central Ave and 2Nd St $13,500.00

NE Perpendicular

3840 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.6
Right Flare	(%)	7.7
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

3839 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

- *As-Built Description:*
  Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* Left: 3.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

Unit Cost **$3500.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	68.0
Length of Ramp / Pad	(in)	92.0	94.0
Slope of the Ramp / Pad	(%)	5.1	4.5
X Slope of the Ramp / Pad	(%)	0.9	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**3.1**	0.6
Top Landing X Slope	(%)	1.8	1.5

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3837 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.2
Right Flare	(%)	7.3
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSE Perpendicular

3838 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.9
Right Flare	(%)	7.9
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSW Perpendicular

3841 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	51.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.2	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3842 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.6**
Right Flare	(%)	6.8
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	3.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Central Ave *and* N A St **$17,000.00**

NE Under Construction

3844 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Under Construction

3845 Existing Curb Ramp

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3843 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	8.8
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

3846 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)	49.0	49.0
Length of Ramp / Pad	(in)	153.0	184.0
Slope of the Ramp / Pad	(%)	4.4	3.1
X Slope of the Ramp / Pad	(%)	0.9	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.3
Top Landing X Slope	(%)	**2.3**	0.4

Bottom Landing Length	(in)	119.0
Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Ave and N B St **$3,500.00**

NE Under Construction

3821 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
43

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Parallel

3820 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	60.0
Length of Ramp / Pad	(in)	129.0	120.0
Slope of the Ramp / Pad	(%)	3.6	7.2
X Slope of the Ramp / Pad	(%)	1.9	**2.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	1.0
Top Landing X Slope	(%)	1.7	1.3

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.0 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3822 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	64.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.7
Right Flare	(%)	9.4
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3819 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	2.1
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.7
Right Flare	(%)	7.3
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.1 2.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Ave and N C St **$12,750.00**

NE Under Construction

3818 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
43

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Under Construction

3815 Existing Curb Ramp

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

Unit Cost **$0.00**

Priority
43

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3817 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.7
Right Flare	(%)	6.5
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3816 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
53

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.8
Right Flare	(%)	6.9
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Ave and N D St $3,000.00

E Perpendicular

1054 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.4
Right Flare	(%)	5.8
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

1052 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
143

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1053 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.9
Right Flare	(%)	9.2
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Central Ave and N E St **$10,000.00**

E Perpendicular

1051 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.4
Right Flare	(%)	10.0
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

1050 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.3
Right Flare	(%)	7.2
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.9	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

1048 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.0**
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1049 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.4
Right Flare	(%)	**10.5**
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 0.6
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Ave and N Gateway Dr **$19,250.00**

S Perpendicular

4205 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.1
Right Flare	(%)	9.2
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4204 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
153

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Central Ave** ***and*** **N Lake St** **$14,000.00**

Total Costs for Curb Ramps along : **Central Ave** **$93,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	743	Central Ct	W Central Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

872 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

871 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **Curb Ramp Required**

873 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Central Ct** ***and*** **W Central Ave** **$14,000.00**

Total Costs for Curb Ramps along : **Central Ct** **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1094	Central Pl	Orchard Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

824 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

825 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	**36.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.6
Right Flare	(%)	9.6
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	9.8	8.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

826 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**3.8**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.5
Right Flare	(%)	9.1
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Pl and Orchard Ave $21,000.00

NE Perpendicular

834 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
57

Width of Ramp / Pad	(in)	**36.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**5.5**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	N/A
Right Flare	(%)	**11.8**
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

835 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	**36.0**
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**11.8**
Right Flare	(%)	**15.2**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

833 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Central Pl and W Central Ave **$21,000.00**

Total Costs for Curb Ramps along : Central Pl **$42,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	104	Chatom Way	Gary Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

233 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
25

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 10.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.4
Right Flare	(%)	2.0
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

232 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
37

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	**3.1**

Left Flare	(%)	6.1
Right Flare	(%)	4.6
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2	2.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

234 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 10.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.7
Right Flare	(%)	4.8
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

231 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.1
Right Flare	(%)	5.4
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chatom Way and Gary Ln $7,250.00

NE Perpendicular

237 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.5
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	3.6
Right Flare	(%)	3.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

236 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.6
Right Flare	(%)	1.8
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

235 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chatom Way and Triviso Ave **$13,000.00**

Total Costs for Curb Ramps along : Chatom Way **$20,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1592	Cherry St	Peach St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3498 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Parallel

3497 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	52.0
Length of Ramp / Pad	(in)	93.0	90.0
Slope of the Ramp / Pad	(%)	5.5	3.8
X Slope of the Ramp / Pad	(%)	1.3	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.1
Top Landing X Slope	(%)	**3.3**	1.9

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	1.4
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Cherry St and Peach St **$10,500.00**

Total Costs for Curb Ramps along : Cherry St **$10,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1477	Cherry Tree Dr	

NE — No Sidewalk, Curb Ramp Not Required

2681 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2680 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
7

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.2
Right Flare	(%)	8.0
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2679 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.7
Right Flare	(%)	2.7
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.7 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cherry Tree Dr and **$6,250.00**

Total Costs for Curb Ramps along : Cherry Tree Dr **$6,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1559**	**Chestnut Ave**	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2962 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	4.0
Right Flare	(%)	7.4
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NE Perpendicular

2964 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.1**
Right Flare	(%)	4.5
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2963 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Curb Ramp Required

2965 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chestnut Ave and **$20,250.00**

NW Curb Ramp Required

2967 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2968 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.1
Right Flare	(%)	7.1
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2966 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.0
Right Flare	(%)	4.6
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chestnut Ave and Acorn Ct **$12,000.00**

NW Curb Ramp Required

2970 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2971 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	8.5
Right Flare	(%)	7.6
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2969 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.5
Right Flare	(%)	7.8
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Chestnut Ave *and* Cashew Ct **$20,000.00**

NW Curb Ramp Required

2930 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2932 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
45

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	5.9
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2931 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.3
Right Flare	(%)	3.1
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chestnut Ave and Watt St **$16,750.00**

Total Costs for Curb Ramps along : **Chestnut Ave** **$69,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	467	Chianti Ave	S Double Tree Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2618 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2616 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
6

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.4

Left Flare	(%)	4.6
Right Flare	(%)	7.5
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2617 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
3

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.8
Right Flare	(%)	6.2
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chianti Ave *and* S Double Tree Way **$20,000.00**

NE Perpendicular

2619 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.2
Right Flare	(%)	6.3
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Curb Ramp Required

2620 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Chianti Ave** ***and*** **S Timberline Dr** **$13,500.00**

NE Curb Ramp Required

2615 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2614 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.8
Right Flare	(%)	7.3
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.0	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Chianti Ave** ***and*** **S Wolftrap St** **$13,500.00**

Total Costs for Curb Ramps along : **Chianti Ave** **$47,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1187	Chianti Ct	Santa Bonita St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

329 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.9
Right Flare	(%)	5.8
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

330 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.4
Right Flare	(%)	7.2
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

328 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Chianti Ct and Santa Bonita St **$16,750.00**

Total Costs for Curb Ramps along : Chianti Ct **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	952	Claremont Dr	University Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

745 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

744 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 30.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.4
Right Flare	(%)	7.3
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

746 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
45

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**12.4**
Right Flare	(%)	6.7
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Claremont Dr** ***and*** **University Ave** **$21,000.00**

Total Costs for Curb Ramps along : **Claremont Dr** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	911	Clemmensen Ave	Madera Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3568 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

3567 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE **No Sidewalk, Curb Ramp Not Required**

3569 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Clemmensen Ave** ***and*** **Madera Ave** **$0.00**

Total Costs for Curb Ramps along : **Clemmensen Ave** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1124	Clinton St	Elm Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3205 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.2**
Right Flare	(%)	3.9
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3204 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.0
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3202 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.3
Right Flare	(%)	8.6
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Parallel

3203 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
51

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Left: 9.1% Right: 9.6%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	63.0	70.0
Length of Ramp / Pad	(in)	**47.0**	57.0
Slope of the Ramp / Pad	(%)	**9.1**	**9.6**
X Slope of the Ramp / Pad	(%)	0.4	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	0.8
Top Landing X Slope	(%)	2.0	0.4

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Clinton St and Elm Ave $23,250.00

E Perpendicular

3191 Ramp Transition

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
30

• *As-Built Description:*
Flush transition from ramp to gutter not provided.

• *As-is* 0.5"

• *Proposed Solution:*
Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.9
Right Flare	(%)	6.1
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

3192 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
37

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Right: 10.5%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	58.0	60.0
Slope of the Ramp / Pad	(%)	6.8	**10.5**
X Slope of the Ramp / Pad	(%)	1.6	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.4
Top Landing X Slope	(%)	**2.4**	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3190 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 4.7%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.5
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.4
Right Flare	(%)	8.8
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Parallel

3189 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	54.0
Length of Ramp / Pad	(in)	59.0	55.0
Slope of the Ramp / Pad	(%)	5.1	8.2
X Slope of the Ramp / Pad	(%)	1.5	**2.2**
Top Landing Length	(in)	48.0	**30.0**
Top Landing Slope	(%)	0.9	1.2
Top Landing X Slope	(%)	1.4	1.2

Bottom Landing Length	(in)	64.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and Fig Ave $19,750.00

E Curb Ramp Required

3226 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

3228 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
43

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Left: 23.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	68.0	**47.0**
Slope of the Ramp / Pad	(%)	5.6	**9.0**
X Slope of the Ramp / Pad	(%)	0.6	0.8
Top Landing Length	(in)	**23.0**	48.0
Top Landing Slope	(%)	**2.6**	**2.1**
Top Landing X Slope	(%)	**2.4**	0.4

Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	1.7
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Parallel

3225 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
41

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Left: 12.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	81.0
Length of Ramp / Pad	(in)	49.0	52.0
Slope of the Ramp / Pad	(%)	**10.9**	5.3
X Slope of the Ramp / Pad	(%)	1.8	1.2
Top Landing Length	(in)	**12.0**	48.0
Top Landing Slope	(%)	0.1	0.1
Top Landing X Slope	(%)	1.9	1.4

Bottom Landing Length	(in)	66.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Parallel

3227 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.0% Right: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
29

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	58.0
Length of Ramp / Pad	(in)	70.0	69.0
Slope of the Ramp / Pad	(%)	7.1	7.6
X Slope of the Ramp / Pad	(%)	0.8	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	1.5
Top Landing X Slope	(%)	**3.0**	**2.1**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.8
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**4.0**

Street Grade (Left / Right)	(%)	0.6	1.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and Magnolia St $17,500.00

N Perpendicular

3249 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
30

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.6
Right Flare	(%)	5.4
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

3247 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

3248 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
33

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.9
Right Flare	(%)	9.0
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and Malone St **$12,750.00**

E Perpendicular

3222 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.7**
Right Flare	(%)	7.3
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

3223 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3224 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
30

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.4
Right Flare	(%)	6.4
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and Millview Dr **$16,000.00**

E Perpendicular

4323 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 25.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
105

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**25.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**14.1**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**14.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	5.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4325 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 27.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
101

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**14.6**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**27.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**11.7**
Right Flare	(%)	**17.2**
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4324 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 23.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
107

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**15.4**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**23.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**16.0**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4326 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
107

Width of Ramp / Pad	(in)	**34.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**16.4**
Right Flare	(%)	**14.6**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.8	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and S B St $27,500.00

E Perpendicular

3664 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.5
Right Flare	(%)	7.7
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	**4.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3662 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 18.5% Right: 17.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**18.5**
Right Flare	(%)	**17.4**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3663 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
150

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Clinton St and S C St **$13,500.00**

E Perpendicular

4302 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.1
Right Flare	(%)	7.0
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.6 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

4303 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 8.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	78.0	68.0
Length of Ramp / Pad	(in)	67.0	66.0
Slope of the Ramp / Pad	(%)	7.8	**8.5**
X Slope of the Ramp / Pad	(%)	1.1	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.7	2.0
Top Landing X Slope	(%)	1.5	1.7

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	2.0
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.5. 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

4305 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority

55

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	N/A
Length of Ramp / Pad	(in)	67.0	N/A
Slope of the Ramp / Pad	(%)	6.4	N/A
X Slope of the Ramp / Pad	(%)	0.9	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	1.5	N/A
Top Landing X Slope	(%)	0.8	N/A

Bottom Landing Length	(in)	**36.0**
Bottom Landing Slope	(%)	1.8
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.3	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4304 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority

65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.8	2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Clinton St and S Lake St **$28,000.00**

E Parallel

4308 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 3.0% Right: 2.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	54.0
Length of Ramp / Pad	(in)	88.0	93.0
Slope of the Ramp / Pad	(%)	7.5	6.7
X Slope of the Ramp / Pad	(%)	**3.0**	**2.7**
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	0.5	N/A
Top Landing X Slope	(%)	1.9	N/A

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

4307 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.9**
Right Flare	(%)	7.5
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

4306 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.3
Right Flare	(%)	8.0
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Clinton St *and* Sycamore Ave **$21,000.00**

E Perpendicular

3211 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.5
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.7 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3210 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.3
Right Flare	(%)	5.5
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.9 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3212 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	8.9
Right Flare	(%)	4.6
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4 1.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3209 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.4
Right Flare	(%)	5.2
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.9 0.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Clinton St and Tozer St **$19,000.00**

Total Costs for Curb Ramps along : Clinton St **$198,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	506	Cloud Rest Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

351 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

353 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.0	
Right Flare	(%)	6.9	
Gutter Slope	(%)	**6.5**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	1.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

352 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.4
Right Flare	(%)	4.9
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cloud Rest Ct and Monterey St **$20,000.00**

Total Costs for Curb Ramps along : Cloud Rest Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1589	Coconut St	Hacienda St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

3484 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.8
Right Flare	(%)	5.0
Gutter Slope	(%)	9.1
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	0.2	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3485 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Coconut St and Hacienda St **$13,500.00**

Total Costs for Curb Ramps along : Coconut St **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1545	Colima Ave	Ivy Glen Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2788 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.5
Right Flare	(%)	2.7
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.8	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2789 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
48

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	3.0
Right Flare	(%)	5.4
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

2790 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
42

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	69.0	69.0
Length of Ramp / Pad	(in)	76.0	81.0
Slope of the Ramp / Pad	(%)	0.3	6.3
X Slope of the Ramp / Pad	(%)	0.3	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.1**	0.0
Top Landing X Slope	(%)	0.6	0.3

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.5	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Colima Ave and Ivy Glen Dr **$9,500.00**

Total Costs for Curb Ramps along : **Colima Ave** **$9,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	848	Columbia St	E Lincoln Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1160 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	92.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.2
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1159 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.4
Right Flare	(%)	9.0
Gutter Slope	(%)	**15.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1157 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1158 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	63.0	63.5
Length of Ramp / Pad	(in)	104.0	116.0
Slope of the Ramp / Pad	(%)	7.6	6.3
X Slope of the Ramp / Pad	(%)	**2.5**	0.1
Top Landing Length	(in)	0.0	48.0
Top Landing Slope	(%)	N/A	0.3
Top Landing X Slope	(%)	N/A	1.6

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.4	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Columbia St *and* E Lincoln Ave **$16,000.00**

NE No Sidewalk, Curb Ramp Not Required

1139 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1138 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1140 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1137 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Columbia St** ***and*** **E Rush St** **$0.00**

N Curb Ramp Required

1227 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1228 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1229 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Columbia St** ***and*** **Green Way** **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

1165 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1166 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 13.8% Right: 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.8**
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.9	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

1164 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
51

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Columbia St *and* Riverside Dr **$3,250.00**

NE Perpendicular

1156 Ramp Slope

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
58

• *As-Built Description:*
Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

• *As-is* 2.2%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.6
Right Flare	(%)	7.7
Gutter Slope	(%)	**14.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1155 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 16.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	89.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**16.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.2
Right Flare	(%)	9.3
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1153 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.2
Right Flare	(%)	6.7
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.4 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1154 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	92.5
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.0
Right Flare	(%)	7.7
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Columbia St** ***and*** **W South St** **$16,750.00**

Total Costs for Curb Ramps along : **Columbia St** **$43,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	951	Concord Ave	Gary Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

307 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.3
Right Flare	(%)	7.4
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

308 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.9
Right Flare	(%)	**10.1**
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

306 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.0
Right Flare	(%)	6.3
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

305 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.5
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.1
Right Flare	(%)	1.9
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Concord Ave *and* Gary Ln **$12,500.00**

N Curb Ramp Required

295 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

296 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.5
Right Flare	(%)	5.9
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

297 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.6**
Right Flare	(%)	9.1
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Concord Ave and Madrid Ln **$16,750.00**

Total Costs for Curb Ramps along : **Concord Ave** **$29,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	153	Condor Dr	Aviation Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3792 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
12

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3793 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 3.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
30

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	4.3
Right Flare	(%)	4.1
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.3	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Condor Dr and Aviation Dr **$3,250.00**

NE Perpendicular

3802 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
32

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.9
Right Flare	(%)	6.6
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3799 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3801 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3800 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Condor Dr** ***and*** **Kennedy St** **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

2310 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2312 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2309 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.4
Right Flare	(%)	5.3
Gutter Slope	(%)	**13.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2311 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.2
Right Flare	(%)	7.9
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.75**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.0 3.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Condor Dr and W Cleveland Ave **$13,000.00**

Total Costs for Curb Ramps along : **Condor Dr** **$23,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1049	Condor Rd	Boles St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3814 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — No Sidewalk, Curb Ramp Not Required

3813 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

W **No Sidewalk, Curb Ramp Not Required**

3812 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Condor Rd** ***and*** **Boles St** **$0.00**

Total Costs for Curb Ramps along : **Condor Rd** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	415	Corona Dr	La Costa Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Perpendicular

3447 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.8
Right Flare	(%)	7.4
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Curb Ramp Required

3448 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3449 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.2
Right Flare	(%)	6.8
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Corona Dr and La Costa Ct **$20,000.00**

Total Costs for Curb Ramps along : Corona Dr **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1063	Cortopassi St	Dunham Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3555 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

3554 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

3553 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Cortopassi St** ***and*** **Dunham Ave** **$0.00**

Total Costs for Curb Ramps along : **Cortopassi St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	215	Cosentino Dr	St Julien Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

246 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 10.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.9
Right Flare	(%)	3.4
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.5 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

245 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
30

- *As-Built Description:*
  Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.
- *Proposed Solution:*
  Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved
- *Notes:* Rectangular shaped object in middle of domes.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.9
Right Flare	(%)	4.0
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

244 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Cosentino Dr** ***and*** **St Julien Dr** **$10,000.00**

NE Perpendicular

250 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.6
Right Flare	(%)	8.1
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

249 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	61.5
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	**4.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.1
Right Flare	(%)	6.8
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

247 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	55.5
Length of Ramp / Pad	(in)	60.5
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.3
Right Flare	(%)	8.6
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

248 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	55.5
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	8.6
Right Flare	(%)	6.1
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Cosentino Dr** ***and*** **St. Michelle Dr** **$22,500.00**

NE Perpendicular

210 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**10.7**
Right Flare	(%)	4.7
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

209 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.0
Right Flare	(%)	9.6
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

208 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Cosentino Dr** ***and*** **St. Montelena Dr** **$20,000.00**

Total Costs for Curb Ramps along : **Cosentino Dr** **$52,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	458	Country Club Dr	Sharon Bvd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3881 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3880 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
27

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.9
Right Flare	(%)	6.9
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3879 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.4
Right Flare	(%)	9.4
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.0 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Country Club Dr and Sharon Blvd **$13,500.00**

NE Perpendicular

3884 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.8**
Right Flare	(%)	7.8
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 2.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

3883 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)	90.0	90.0
Length of Ramp / Pad	(in)	67.0	94.0
Slope of the Ramp / Pad	(%)	8.2	5.9
X Slope of the Ramp / Pad	(%)	0.1	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.6
Top Landing X Slope	(%)	**2.1**	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.8	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3885 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.3**
Right Flare	(%)	9.6
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.0	0.8
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

3882 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
44

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Right: 8.7%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	90.0	90.0
Length of Ramp / Pad	(in)	70.0	71.0
Slope of the Ramp / Pad	(%)	7.1	**8.7**
X Slope of the Ramp / Pad	(%)	**2.4**	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	**2.5**
Top Landing X Slope	(%)	**2.7**	1.3

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.5 N/A
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Country Club Dr** ***and*** **W Sherwood Way** **$16,500.00**

Total Costs for Curb Ramps along : **Country Club Dr** **$30,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1038	Creek Dr	Ren Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1855 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
13

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.8
Right Flare	(%)	8.7
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1857 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.9
Right Flare	(%)	**10.6**
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1856 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Creek Dr and Ren Way **$16,000.00**

Total Costs for Curb Ramps along : Creek Dr **$16,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	618	Crimson Way	Storey Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

4430 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	5.3
Right Flare	(%)	7.0
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

4429 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**3.7**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.4
Right Flare	(%)	9.2
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	1.2 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

4428 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
27

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Crimson Way and Storey Rd **$14,000.00**

Total Costs for Curb Ramps along : Crimson Way **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1128	Cross St	Rose St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

3265 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — No Sidewalk, Curb Ramp Not Required

3264 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3266 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cross St and Rose St **$0.00**

Total Costs for Curb Ramps along : Cross St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	395	Crystal Way	Bo Tree Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2922 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2921 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	4.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.6
Right Flare	(%)	5.0
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2920 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	3.8
Right Flare	(%)	6.8
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4 0.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Crystal Way *and* Bo Tree Ln **$16,750.00**

NE Perpendicular

2909 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.1
Right Flare	(%)	6.0
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.6 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2908 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	6.7
Right Flare	(%)	3.0
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	0.2 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2906 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.6
Right Flare	(%)	5.6
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2907 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.1
Right Flare	(%)	7.7
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Crystal Way and Gary Ln **$18,500.00**

NE Perpendicular

2902 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.7
Right Flare	(%)	6.2
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2901 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.1
Right Flare	(%)	10.0
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2903 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Crystal Way and Strauss Ct **$20,000.00**

Total Costs for Curb Ramps along : Crystal Way **$55,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	338	Cutting St	E Lincoln Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1275 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	114.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.5
Right Flare	(%)	5.1
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1274 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	109.5
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.4
Right Flare	(%)	6.1
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1272 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	110.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.1**
Right Flare	(%)	9.1
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1273 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	112.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.8
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.8	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Cutting St *and* E Lincoln Ave **$15,750.00**

NE No Sidewalk, Curb Ramp Not Required

1256 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1255 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1257 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1254 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cutting St *and* Rush St **$0.00**

NE Combination

1270 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	**37.0**	51.0
Slope of the Ramp / Pad	(%)	5.0	4.2
X Slope of the Ramp / Pad	(%)	1.6	1.0
Top Landing Length	(in)	**0.0**	48.0
Top Landing Slope	(%)	N/A	1.1
Top Landing X Slope	(%)	N/A	0.6
Length of Combo. Ramp	(in)	66.0	
Combo. Ramp Slope	(%)	6.7	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	52.0	
Bottom Landing Slope	(in)	**2.4**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	N/A	
Right Flare	(%)	N/A	
Gutter Slope	(%)	**5.1**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	

Street Grade (Left / Right)	(%)	1.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Combination

1271 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.9%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
48

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	60.0	68.5
Slope of the Ramp / Pad	(%)	4.0	1.6
X Slope of the Ramp / Pad	(%)	0.5	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.3
Top Landing X Slope	(%)	0.5	**3.9**
Length of Combo. Ramp	(in)	60.0	
Combo. Ramp Slope	(%)	7.6	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	52.0	
Bottom Landing Slope	(in)	1.2	
Bottom Landing X Slope	(in)	1.0	
Left Flare	(%)	N/A	
Right Flare	(%)	N/A	
Gutter Slope	(%)	**5.2**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1269 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
136

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Cutting St and W South St **$14,000.00**

Total Costs for Curb Ramps along : Cutting St **$29,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1316	Cypress St	Oak St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2763 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — Perpendicular

2766 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
31

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.6
Right Flare	(%)	6.0
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2764 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**11.6**
Right Flare	(%)	8.1
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2765 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.8**
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	1.9 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cypress St and Oak St **$12,000.00**

NE Perpendicular

2735 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.9**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.8**
Right Flare	(%)	7.9
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2734 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
89

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	9.5
Right Flare	(%)	5.0
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2733 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
64

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.1
Right Flare	(%)	6.2
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Cypress St and Olive Ave **$13,250.00**

Total Costs for Curb Ramps along : Cypress St **$25,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1315	D St	6Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Combination**

3643 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.6%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	67.0	144.0
Length of Ramp / Pad	(in)	113.0	153.0
Slope of the Ramp / Pad	(%)	**8.5**	5.5
X Slope of the Ramp / Pad	(%)	1.1	1.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	2.2
Top Landing X Slope	(%)	1.1	**2.6**
Length of Combo. Ramp	(in)	**43.0**	
Combo. Ramp Slope	(%)	2.4	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	96.0	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	0.2	
Left Flare	(%)	1.2	
Right Flare	(%)	0.2	
Gutter Slope	(%)	**5.7**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	7.0	
Street Grade (Left / Right)	(%)	0.8	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

3645 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 7.0% Right: 3.2%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
89

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	64.0
Length of Ramp / Pad	(in)	121.0	154.0
Slope of the Ramp / Pad	(%)	7.6	3.9
X Slope of the Ramp / Pad	(%)	1.0	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	0.7
Top Landing X Slope	(%)	**7.0**	**3.2**
Length of Combo. Ramp	(in)	72.0	
Combo. Ramp Slope	(%)	7.9	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	115.0	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	1.6	
Left Flare	(%)	6.1	
Right Flare	(%)	5.0	
Gutter Slope	(%)	3.3	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	7.0	
Street Grade (Left / Right)	(%)	0.9	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Parallel

3644 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.6% Right: 2.1%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
73

		LEFT	RIGHT
Width of Ramp / Pad	(in)	142.0	103.0
Length of Ramp / Pad	(in)	111.0	110.0
Slope of the Ramp / Pad	(%)	6.9	6.3
X Slope of the Ramp / Pad	(%)	0.3	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.4
Top Landing X Slope	(%)	**2.6**	**2.1**
Bottom Landing Length	(in)	120.0	
Bottom Landing Slope	(%)	0.6	
Bottom Landing X Slope	(%)	0.4	
Gutter Slope	(%)	4.3	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**15.0**	
Street Grade (Left / Right)	(%)	1.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

3646 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	7.3
Right Flare	(%)	8.4
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.1 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : D St and 6Th St **$17,000.00**

E Curb Ramp Required

3638 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
160

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

E Perpendicular

3640 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
108

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**16.1**
Right Flare	(%)	**15.4**
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Perpendicular

3641 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
82

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	3.3
Right Flare	(%)	7.4
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Parallel

3637 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.2% Right: 4.2%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	91.0	53.0
Length of Ramp / Pad	(in)	122.0	107.0
Slope of the Ramp / Pad	(%)	7.5	3.4
X Slope of the Ramp / Pad	(%)	1.9	1.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.8**	3.1
Top Landing X Slope	(%)	**3.2**	**4.2**

Bottom Landing Length	(in)	91.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.2	3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Parallel

3639 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7% Right: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	53.0
Length of Ramp / Pad	(in)	112.0	137.0
Slope of the Ramp / Pad	(%)	5.9	7.3
X Slope of the Ramp / Pad	(%)	0.5	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	0.8
Top Landing X Slope	(%)	**2.7**	**2.2**

Bottom Landing Length	(in)	111.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

3642 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
160

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : D St and 7Th St **$30,750.00**

Total Costs for Curb Ramps along : D St **$47,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	379	Davis St	E Lincoln Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1184 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	96.5
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	3.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1185 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	117.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**4.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	**4.7**

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	6.5 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Driveway

1183 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Davis St** ***and*** **E Lincoln Ave** **$13,000.00**

NE No Sidewalk, Curb Ramp Not Required

1188 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1187 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

1186 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Davis St** ***and*** **Harding Ave** **$0.00**

Total Costs for Curb Ramps along : **Davis St** **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	140	Del Lago Way	Rancho Mirage Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3138 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3137 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.5
Right Flare	(%)	7.5
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3139 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.9
Right Flare	(%)	7.1
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Del Lago Way** ***and*** **Rancho Mirage Rd** **$20,000.00**

Total Costs for Curb Ramps along : **Del Lago Way** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**283**	**Dellavalle Ave**	**E Lincoln Ave**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1315 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.0
Right Flare	(%)	4.0
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

1316 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Right: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	58.0	80.0
Slope of the Ramp / Pad	(%)	7.5	**10.2**
X Slope of the Ramp / Pad	(%)	0.3	0.4
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	1.6	N/A
Top Landing X Slope	(%)	**2.3**	N/A

Bottom Landing Length	(in)	70.0
Bottom Landing Slope	(%)	**3.2**
Bottom Landing X Slope	(%)	2.0
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1314 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
62

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.6**
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Dellavalle Ave and E Lincoln Ave **$13,250.00**

NE Perpendicular

1378 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.7**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 3.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1379 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.9**
Right Flare	(%)	**12.8**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.5 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1381 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.0
Right Flare	(%)	10.0
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1380 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
92

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**13.1**
Right Flare	(%)	**13.9**
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Dellavalle Ave and W Sherwood Way **$22,500.00**

NW Curb Ramp Required

1292 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
146

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1290 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	9.4
Right Flare	(%)	6.0
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1291 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.8%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.9**
Right Flare	(%)	3.7
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk		**<48"**	
Crosswalks Served:	(y/n)	1 X-walk	
Tee Intersection:		Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Dellavalle Ave** ***and*** **W South St** **$16,750.00**

Total Costs for Curb Ramps along : **Dellavalle Ave** **$52,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	302	Desert Ranch Way	Makenna Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

4394 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.5
Right Flare	(%)	8.8
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

4395 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Desert Ranch Way and Makenna Dr **$14,000.00**

NE Perpendicular

2590 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.2
Right Flare	(%)	5.9
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2589 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.7
Right Flare	(%)	5.0
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

2591 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Desert Ranch Way** ***and*** **S Double Tree Way** **$20,000.00**

Total Costs for Curb Ramps along : **Desert Ranch Way** **$34,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	505	Diamante Ln	Orchard Hill Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2803 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2802 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.6
Right Flare	(%)	7.5
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2801 Ramp Transition

- *As-Built Description:*

  Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.9
Right Flare	(%)	6.9
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Diamante Ln** ***and*** **Orchard Hill Dr** **$9,500.00**

Total Costs for Curb Ramps along : **Diamante Ln** **$9,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	287	Diamond Way	Bo Tree Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2892 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.0
Right Flare	(%)	2.9
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.5	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2893 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.6
Right Flare	(%)	5.7
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2894 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Diamond Way** ***and*** **Bo Tree Ln** **$16,500.00**

NE Perpendicular

2896 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	3.7
Right Flare	(%)	6.4
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	2.0 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2895 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.9
Right Flare	(%)	3.1
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	0.1 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2897 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
51

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.0
Right Flare	(%)	8.4
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2898 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.9
Right Flare	(%)	8.1
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Diamond Way** ***and*** **Gary Ln** **$19,000.00**

NW Curb Ramp Required

2891 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2890 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.6
Right Flare	(%)	3.2
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.1	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Diamond Way** ***and*** **Joya Dr** **$10,000.00**

NE Perpendicular

2899 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.1
Right Flare	(%)	6.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2900 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Diamond Way and Strauss Ct **$10,250.00**

Total Costs for Curb Ramps along : Diamond Way **$55,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	493	Dominguez Dr	Lacreta Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2019 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2021 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 11.8%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.6
Right Flare	(%)	3.6
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2020 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 4.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	**4.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	2.5
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	**4.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Dominguez Dr** ***and*** **Lacreta Ave** **$16,500.00**

Total Costs for Curb Ramps along : **Dominguez Dr** **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	629	Double Checkavenue 15	Tozer St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3280 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — No Sidewalk, Curb Ramp Not Required

3281 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3282 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Double Checkavenue 15** ***and*** **Tozer St** **$0.00**

Total Costs for Curb Ramps along : **Double Checkavenue 15** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	264	Double Tree Ct	Gamay Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2594 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2593 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.2
Right Flare	(%)	7.0
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2592 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
0

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.7
Right Flare	(%)	6.0
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Double Tree Ct** ***and*** **Gamay Ave** **$14,000.00**

Total Costs for Curb Ramps along : **Double Tree Ct** **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1350	Double Tree Way	Boulder Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

1499 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.3
Right Flare	(%)	7.9
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**NO**
Truncated Domes	(y/n)	

Street Grade (Left / Right)	(%)	0.9 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1500 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
30

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	67.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.6
Right Flare	(%)	5.9
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1498 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**12.1**
Right Flare	(%)	8.9
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1497 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	**3.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.6
Right Flare	(%)	**10.1**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way and Boulder Ave **$22,750.00**

E Curb Ramp Required

1507 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1506 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**11.1**
Right Flare	(%)	9.6
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1508 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**10.2**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way and Castle Way **$20,000.00**

ENE Driveway

1395 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Perpendicular

1393 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.9
Right Flare	(%)	**11.8**
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1396 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.6
Right Flare	(%)	9.0
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

1394 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way and Liberty Ln **$21,000.00**

E Perpendicular

1461 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.6**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1462 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.3
Right Flare	(%)	9.8
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

1460 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way *and* Paintbrush Dr **$20,000.00**

NE Perpendicular

1487 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.9**
Right Flare	(%)	**10.3**
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1488 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.4**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1490 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	56.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**11.6**
Right Flare	(%)	8.4
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1489 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	10.0
Right Flare	(%)	8.2
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way *and* Suburban Ave **$26,500.00**

NE Perpendicular

1849 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
30

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.5
Right Flare	(%)	6.2
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1851 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.8
Right Flare	(%)	5.1
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1850 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Double Tree Way and Winter Way **$16,750.00**

Total Costs for Curb Ramps along : Double Tree Way **$127,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1569	Drake St	Padre St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3112 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3111 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.2
Right Flare	(%)	6.8
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.1	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Drake St *and* Padre St **$13,500.00**

NW Perpendicular

3124 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.6
Right Flare	(%)	3.8
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3125 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Drake St and Sauret St **$10,000.00**

Total Costs for Curb Ramps along : Drake St **$23,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	712	Driftwood Dr	Cypress Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

631 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	9.4
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

632 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.4**
Right Flare	(%)	9.9
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

630 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Driftwood Dr** ***and*** **Cypress Ct** **$20,500.00**

NE Perpendicular

628 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.2**
Right Flare	(%)	6.7
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

629 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.6
Right Flare	(%)	**11.5**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

627 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Driftwood Dr *and* Harbor Ct **$20,000.00**

NE Perpendicular

634 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.5**
Right Flare	(%)	9.3
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

635 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.0**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

633 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Driftwood Dr and Mainberry Dr **$21,000.00**

NE Perpendicular

1577 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	**38.0**
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**7.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.3
Right Flare	(%)	9.1
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1575 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	**41.0**
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**7.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.2
Right Flare	(%)	6.1
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

1576 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Driftwood Dr** ***and*** **Monocott Dr** **$20,000.00**

Total Costs for Curb Ramps along : **Driftwood Dr** **$81,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	42	Drysdale Way	Podres Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3291 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

3290 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.7
Right Flare	(%)	3.3
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3292 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	3.3
Right Flare	(%)	4.4
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Drysdale Way** ***and*** **Podres Ln** **$16,000.00**

Total Costs for Curb Ramps along : **Drysdale Way** **$16,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	575	Dunham Ave	Madera Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3577 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Curb Ramp Required

3578 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

3582 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.6% Right: 3.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	73.0
Length of Ramp / Pad	(in)	70.0	96.0
Slope of the Ramp / Pad	(%)	5.6	6.4
X Slope of the Ramp / Pad	(%)	**2.6**	**3.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	**2.1**
Top Landing X Slope	(%)	**3.7**	1.6

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.5	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3576 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3584 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3583 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.5**
Right Flare	(%)	5.0
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Dunham Ave** ***and*** **Madera Ave** **$17,000.00**

NE No Sidewalk, Curb Ramp Not Required

3551 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3550 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3552 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Dunham Ave** ***and*** **Martin St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

370 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

369 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

368 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Dunham Ave** ***and*** **Monterey St** **$0.00**

Total Costs for Curb Ramps along : **Dunham Ave** **$17,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1323	Dutra Ct	Stephanie Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2524 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.9
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2523 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.7
Right Flare	(%)	8.4
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2521 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.3
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2522 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.4
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Dutra Ct and Stephanie Ln **$22,500.00**

Total Costs for Curb Ramps along : Dutra Ct **$22,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	829	Dutra Way	Arbella Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2510 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
25

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.1
Right Flare	(%)	7.2
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2509 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.3
Right Flare	(%)	6.9
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2511 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Dutra Way and Arbella Ln **$16,000.00**

NE Perpendicular

2514 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
61

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**4.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**5.5**

Left Flare	(%)	3.0
Right Flare	(%)	10.0
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	**5.6**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.7 3.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2513 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.0
Right Flare	(%)	8.3
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2515 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 5.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	**5.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**6.8**

Left Flare	(%)	**11.7**
Right Flare	(%)	1.8
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	**6.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	6.0 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2512 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 30.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.8
Right Flare	(%)	6.9
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Dutra Way and N Schnoor Ave **$26,500.00**

Total Costs for Curb Ramps along : Dutra Way	**$42,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1257	DWayer Ave	Modoc St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2625 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	5.7
Right Flare	(%)	3.8
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2623 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2624 Ramp Transition

- *As-Built Description:*

  Flush transition from ramp to gutter not provided.

- *As-is* 0.75"
- *Proposed Solution:*

  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
48

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.7
Right Flare	(%)	6.8
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : DWayer Ave and Modoc St **$16,500.00**

Total Costs for Curb Ramps along : DWayer Ave **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	703	E Clark St	N D St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3992 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3993 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	**46.0**
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.4
Right Flare	(%)	8.4
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

3991 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Clark St and N D St **$14,000.00**

Total Costs for Curb Ramps along : E Clark St **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	277	E Cleveland Ave	Celeste Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Parallel

4056 Ramp Cross Slope

CBC 2019 **11B-406.5.7**

ADAAG **4.8.6**

PROWAG **R304.5.3**

- *As-Built Description:*

  Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 4.1%

- *Proposed Solution:*

  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority

58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	50.0	51.0
Length of Ramp / Pad	(in)	70.0	75.0
Slope of the Ramp / Pad	(%)	6.3	5.9
X Slope of the Ramp / Pad	(%)	0.2	**4.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	**2.2**
Top Landing X Slope	(%)	1.6	**2.4**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4057 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	71.0	71.0
Slope of the Ramp / Pad	(%)	6.2	7.6
X Slope of the Ramp / Pad	(%)	1.6	**3.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.8
Top Landing X Slope	(%)	**2.6**	**4.5**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4055 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Celeste Ct **$21,000.00**

NE Parallel

1355 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 9.3%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	62.0	62.5
Length of Ramp / Pad	(in)	58.0	56.0
Slope of the Ramp / Pad	(%)	5.6	**9.3**
X Slope of the Ramp / Pad	(%)	1.2	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.0
Top Landing X Slope	(%)	**3.1**	**3.7**

Bottom Landing Length	(in)	54.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

1354 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.1%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	62.0	62.0
Length of Ramp / Pad	(in)	68.0	70.0
Slope of the Ramp / Pad	(%)	3.9	5.6
X Slope of the Ramp / Pad	(%)	0.7	**2.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.2**	1.6
Top Landing X Slope	(%)	0.8	**3.6**

Bottom Landing Length	(in)	54.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	1.8
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

1352 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	61.5
Length of Ramp / Pad	(in)	64.0	60.0
Slope of the Ramp / Pad	(%)	4.6	6.6
X Slope of the Ramp / Pad	(%)	0.5	**3.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	**3.5**
Top Landing X Slope	(%)	1.9	**3.2**

Bottom Landing Length	(in)	56.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1353 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 8.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.5	62.0
Length of Ramp / Pad	(in)	70.0	68.0
Slope of the Ramp / Pad	(%)	**8.7**	7.4
X Slope of the Ramp / Pad	(%)	1.2	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.0	0.6
Top Landing X Slope	(%)	1.7	**2.1**

Bottom Landing Length	(in)	56.5
Bottom Landing Slope	(%)	0.0
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Columbia St **$28,000.00**

N Curb Ramp Required

4159 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

4161 Ramp Landing

- *As-Built Description:*
  Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	79.0	80.0
Slope of the Ramp / Pad	(%)	5.9	4.7
X Slope of the Ramp / Pad	(%)	1.8	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	1.2
Top Landing X Slope	(%)	**2.3**	0.5

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

4160 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	82.0	73.0
Slope of the Ramp / Pad	(%)	8.0	7.3
X Slope of the Ramp / Pad	(%)	**2.2**	2.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	0.0
Top Landing X Slope	(%)	**3.6**	**5.4**

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	**3.4**
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Cleveland Ave *and* Cutting St **$21,000.00**

NE Perpendicular

1216 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	58.5
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.7
Right Flare	(%)	5.7
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1217 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.8
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

1219 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	60.0	67.0
Slope of the Ramp / Pad	(%)	6.6	4.3
X Slope of the Ramp / Pad	(%)	0.6	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	0.5
Top Landing X Slope	(%)	**2.3**	1.4

Bottom Landing Length	(in)	52.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1218 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 8.6%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	64.0	60.0
Slope of the Ramp / Pad	(%)	**8.6**	7.6
X Slope of the Ramp / Pad	(%)	0.9	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.4**	0.0
Top Landing X Slope	(%)	1.1	**2.3**

Bottom Landing Length	(in)	52.0
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Cleveland Ave *and* Davis St **$23,500.00**

NE Parallel

4152 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	50.0	50.0
Length of Ramp / Pad	(in)	66.0	79.0
Slope of the Ramp / Pad	(%)	5.3	4.4
X Slope of the Ramp / Pad	(%)	1.1	1.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.2
Top Landing X Slope	(%)	1.0	**3.7**

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

4151 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	81.0	81.0
Slope of the Ramp / Pad	(%)	5.4	6.6
X Slope of the Ramp / Pad	(%)	0.7	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	1.4
Top Landing X Slope	(%)	1.1	2.0

Bottom Landing Length	(in)	**43.0**
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

4154 Ramp Landing

- *As-Built Description:*

Cross slope at bottom landing of existing parallel curb ramp exceeds 2%.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing bottom landing and provide new, including detectable warning surface. Ramp to remain.

CBC 2019 **11B-406.3.2**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	52.0
Length of Ramp / Pad	(in)	66.0	79.0
Slope of the Ramp / Pad	(%)	6.7	5.9
X Slope of the Ramp / Pad	(%)	0.7	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	1.4
Top Landing X Slope	(%)	1.0	0.8

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	**2.4**
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

4153 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	76.0	72.0
Slope of the Ramp / Pad	(%)	**10.9**	6.2
X Slope of the Ramp / Pad	(%)	**5.2**	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	0.6
Top Landing X Slope	(%)	**2.7**	1.2

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**4.0**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Cleveland Ave *and* Dellavalle Ave **$24,500.00**

N Curb Ramp Required

4175 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Parallel

4173 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.7% Right: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	74.0	80.0
Slope of the Ramp / Pad	(%)	7.3	4.7
X Slope of the Ramp / Pad	(%)	**3.7**	**2.7**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.6
Top Landing X Slope	(%)	1.6	**2.8**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**4.2**
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	1.0 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

4172 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Right: 12.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	85.0	80.0
Slope of the Ramp / Pad	(%)	8.2	**12.2**
X Slope of the Ramp / Pad	(%)	1.9	**3.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.0
Top Landing X Slope	(%)	0.4	**3.4**

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	**2.4**
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4174 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

4177 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.2% Right: 3.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	74.0	81.0
Slope of the Ramp / Pad	(%)	**8.7**	**8.9**
X Slope of the Ramp / Pad	(%)	**3.2**	**3.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.3
Top Landing X Slope	(%)	**3.8**	**2.7**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

4176 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.6% Right: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	73.0	82.0
Slope of the Ramp / Pad	(%)	5.6	6.6
X Slope of the Ramp / Pad	(%)	**2.6**	**2.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	**2.4**
Top Landing X Slope	(%)	**2.9**	**3.7**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**3.1**
Bottom Landing X Slope	(%)	1.6
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Cleveland Ave *and* Fresno St **$42,000.00**

NE Parallel

4061 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8% Right: 2.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	60.0	73.0
Slope of the Ramp / Pad	(%)	5.5	5.9
X Slope of the Ramp / Pad	(%)	**2.8**	**2.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.2
Top Landing X Slope	(%)	**2.2**	**2.8**

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4063 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	51.0
Length of Ramp / Pad	(in)	69.0	93.0
Slope of the Ramp / Pad	(%)	6.2	6.2
X Slope of the Ramp / Pad	(%)	1.4	**2.7**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.7	0.5
Top Landing X Slope	(%)	**2.4**	**3.0**

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4062 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Kadota Ave **$21,000.00**

NE Perpendicular

1345 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	49.5
Length of Ramp / Pad	(in)	86.5
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.6
Right Flare	(%)	4.8
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

NW Perpendicular

1344 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.5
Right Flare	(%)	6.2
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.1 2.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SE Perpendicular

1346 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	9.2
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SW Perpendicular

1347 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.5
Slope of the Ramp / Pad	(%)	4.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.1
Right Flare	(%)	3.5
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.7 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and N D St **$15,500.00**

NE Perpendicular

4167 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
78

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	4.1
Right Flare	(%)	6.9
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4168 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	68.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.7
Right Flare	(%)	8.0
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.9 3.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4166 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.0
Right Flare	(%)	5.3
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4165 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	112.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.0
Right Flare	(%)	5.8
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and N Lake St **$27,500.00**

NE Perpendicular

1211 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 15.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.5
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.8
Right Flare	(%)	4.9
Gutter Slope	(%)	**15.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 2.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1210 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	10.0
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

1208 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Left: 11.1% Right: 9.5%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	60.0	69.0
Slope of the Ramp / Pad	(%)	**11.1**	**9.5**
X Slope of the Ramp / Pad	(%)	1.9	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	1.4
Top Landing X Slope	(%)	**2.6**	1.8

Bottom Landing Length	(in)	58.5
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SW Parallel

1209 Ramp Slope

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

• *As-Built Description:*
Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

• *As-is* Left: 8.6%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	62.0	65.0
Slope of the Ramp / Pad	(%)	**8.6**	6.5
X Slope of the Ramp / Pad	(%)	1.7	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**3.3**	0.4
Top Landing X Slope	(%)	**2.6**	1.4

Bottom Landing Length	(in)	52.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 2.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Owens St **$20,250.00**

NE Perpendicular

1351 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.0**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.8
Right Flare	(%)	7.5
Gutter Slope	(%)	**15.7**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

1350 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* Right: 2.6%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	64.0	68.0
Slope of the Ramp / Pad	(%)	4.9	5.5
X Slope of the Ramp / Pad	(%)	0.2	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	**2.6**
Top Landing X Slope	(%)	0.4	1.6

Bottom Landing Length	(in)	54.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	1.6
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.2	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

1348 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 4.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	63.0	63.0
Slope of the Ramp / Pad	(%)	7.8	8.2
X Slope of the Ramp / Pad	(%)	0.9	**4.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	1.0
Top Landing X Slope	(%)	**3.3**	**2.3**

Bottom Landing Length	(in)	52.0
Bottom Landing Slope	(%)	**2.3**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1349 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.2% Right: 4.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	68.0	58.0
Slope of the Ramp / Pad	(%)	7.4	5.8
X Slope of the Ramp / Pad	(%)	**3.2**	**4.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.8
Top Landing X Slope	(%)	**2.1**	**2.7**

Bottom Landing Length	(in)	56.0
Bottom Landing Slope	(%)	1.7
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 2.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Sierra St **$24,000.00**

NE Perpendicular

1328 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 7.4%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.4
Right Flare	(%)	6.7
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1327 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.0%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.6
Right Flare	(%)	9.2
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

1325 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7% Right: 2.5%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	61.5
Length of Ramp / Pad	(in)	60.0	64.0
Slope of the Ramp / Pad	(%)	6.1	5.0
X Slope of the Ramp / Pad	(%)	1.4	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	**3.0**
Top Landing X Slope	(%)	**2.7**	**2.5**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.7**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1326 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	67.0	62.0
Slope of the Ramp / Pad	(%)	7.8	5.9
X Slope of the Ramp / Pad	(%)	0.7	**3.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.2	0.4
Top Landing X Slope	(%)	**4.2**	0.7

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**3.8**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 3.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Sonora St **$20,000.00**

NE Perpendicular

4179 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.7**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 1.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Parallel

4180 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.2% Right: 2.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
67

		LEFT	RIGHT
Width of Ramp / Pad	(in)	70.0	62.0
Length of Ramp / Pad	(in)	74.0	67.0
Slope of the Ramp / Pad	(%)	5.3	7.9
X Slope of the Ramp / Pad	(%)	**2.2**	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	1.4
Top Landing X Slope	(%)	1.7	1.1

Bottom Landing Length	(in)	**44.0**
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

4178 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 10.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	52.0
Length of Ramp / Pad	(in)	82.0	72.0
Slope of the Ramp / Pad	(%)	7.0	**10.4**
X Slope of the Ramp / Pad	(%)	1.8	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	1.1
Top Landing X Slope	(%)	**2.1**	**2.4**

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	1.5
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 2.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

4181 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	80.0	81.0
Slope of the Ramp / Pad	(%)	6.4	6.0
X Slope of the Ramp / Pad	(%)	1.1	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.4
Top Landing X Slope	(%)	0.4	0.2

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**13.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Cleveland Ave and Tulare St **$27,500.00**

Total Costs for Curb Ramps along : **E Cleveland Ave** **$315,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1484	E Ellis St	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

2063 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NE — No Sidewalk, Curb Ramp Not Required

1948 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

NW No Sidewalk, Curb Ramp Not Required

1949 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE No Sidewalk, Curb Ramp Not Required

1947 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE Perpendicular

2064 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.9
Right Flare	(%)	6.0
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1950 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	4.0
Right Flare	(%)	3.6
Gutter Slope	(%)	**12.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2065 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	59.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.9
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Ellis St and **$16,250.00**

N No Sidewalk, Curb Ramp Not Required

2131 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE Perpendicular

2132 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	4.4
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	3.8
Right Flare	(%)	5.1
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.5**

Street Grade (Left / Right)	(%)	0.3 3.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2133 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	4.7
Right Flare	(%)	3.2
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Ellis St and Eagle Dr **$3,250.00**

N No Sidewalk, Curb Ramp Not Required

2128 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE Perpendicular

2129 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.0
Right Flare	(%)	3.0
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2130 Ramp Flare

- *As-Built Description:*

  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.1**
Right Flare	(%)	3.2
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	3.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Ellis St and Merced St **$9,750.00**

Total Costs for Curb Ramps along : E Ellis St **$29,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1488	E Kennedy St	

NE — No Sidewalk, Curb Ramp Not Required

1979 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW — Perpendicular

1980 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.6
Right Flare	(%)	3.9
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1978 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
29

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : E Kennedy St and $6,500.00

NE Perpendicular

2002 Ramp Transition

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

• *As-Built Description:*
Flush transition from ramp to gutter not provided.

• *As-is* 0.5"

• *Proposed Solution:*
Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

Unit Cost **$2500.00**

Priority
14

Width of Ramp / Pad	(in)	49.5
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.6**
Right Flare	(%)	8.7
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2003 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**12.9**
Right Flare	(%)	**12.9**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

2001 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
29

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : E Kennedy St and Jericho Dr **$9,000.00**

NE Perpendicular

2099 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
20

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.9
Right Flare	(%)	5.4
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.3	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2100 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
32

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.1
Right Flare	(%)	5.2
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

2098 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
39

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : E Kennedy St and Jesse Dr $5,000.00

NE Perpendicular

2105 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
30

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 11.1%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.2
Right Flare	(%)	6.4
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2106 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.5
Right Flare	(%)	**11.3**
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2104 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
139

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Kennedy St and Merced St **$13,250.00**

N Curb Ramp Required

2102 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
127

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2101 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW Perpendicular

2103 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.9
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.3 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Kennedy St and Tulare St **$10,000.00**

Total Costs for Curb Ramps along : E Kennedy St **$43,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**699**	**E Lincoln Ave**	**Nebraska St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

1313 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 5.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
68

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	62.0
Length of Ramp / Pad	(in)	114.0	73.0
Slope of the Ramp / Pad	(%)	6.1	8.1
X Slope of the Ramp / Pad	(%)	1.1	**5.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	N/A	0.2
Top Landing X Slope	(%)	N/A	**3.1**

Bottom Landing Length	(in)	54.0
Bottom Landing Slope	(%)	**3.1**
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1312 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.3**
Right Flare	(%)	**13.7**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	1 X-walk
Tee Intersection:		Yes
Vertical Curb:		Vertical

SW Perpendicular

1311 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.5**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Lincoln Ave and Nebraska St **$20,000.00**

Total Costs for Curb Ramps along : **E Lincoln Ave** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1504	E Pecan Ave	Raymond Thomas St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2982 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2980 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.9
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **No Sidewalk, Curb Ramp Not Required**

2981 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **E Pecan Ave** ***and*** **Raymond Thomas St** **$10,250.00**

Total Costs for Curb Ramps along : **E Pecan Ave** **$10,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	878	E Riverside Dr	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

1284 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.8
Right Flare	(%)	9.7
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1285 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.9
Right Flare	(%)	6.3
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	1 X-walk
Tee Intersection:		Yes
Vertical Curb:		Vertical

SW Perpendicular

1286 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
85

Width of Ramp / Pad	(in)	117.0
Length of Ramp / Pad	(in)	126.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.8**
Right Flare	(%)	**17.1**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Riverside Dr and Austin Ave **$12,750.00**

NE Perpendicular

1288 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.1
Right Flare	(%)	6.8
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1289 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.6
Right Flare	(%)	9.6
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

1287 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
51

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Riverside Dr *and* Dellavalle Ave **$6,250.00**

NE Perpendicular

4092 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
46

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 12.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.7
Right Flare	(%)	8.9
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

4093 Ramp Flare

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

• *As-Built Description:*
Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

• *As-is* Left: 10.1% Right: 10.6%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.1**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	2.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

4091 Compliant Curb Ramp

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.7
Right Flare	(%)	8.6
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

4090 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Riverside Dr *and* Fresno St **$3,750.00**

E Perpendicular

4067 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**14.9**
Right Flare	(%)	**15.6**
Gutter Slope	(%)	**13.7**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

4069 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
104

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**12.1**
Right Flare	(%)	**14.4**
Gutter Slope	(%)	**14.8**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	1.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4068 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
100

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	**3.7**
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**13.6**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Riverside Dr and N Lake St **$21,000.00**

NE Perpendicular

1297 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.1
Right Flare	(%)	9.4
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1298 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.4
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **No Sidewalk, Curb Ramp Not Required**

1296 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **E Riverside Dr** ***and*** **Nebraska St** **$13,000.00**

Total Costs for Curb Ramps along : **E Riverside Dr** **$56,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1498**	**E Yosemite Ave**	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2876 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
28

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.6
Right Flare	(%)	5.9
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2875 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
36

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.4
Right Flare	(%)	8.6
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	3.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2877 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.2
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Driveway

3268 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2878 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
20

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.6
Right Flare	(%)	4.7
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and **$9,000.00**

NW Driveway

3267 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave *and* 6Th St **$0.00**

NE Perpendicular

2879 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
31

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	4.2
Right Flare	(%)	5.2
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.3
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2882 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	**3.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**4.2**

Left Flare	(%)	4.0
Right Flare	(%)	8.3
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2	1.1
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2880 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW Perpendicular

2881 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 30.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**5.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.4
Right Flare	(%)	4.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave *and* Almond Ave **$16,750.00**

E Perpendicular

3650 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
81

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	117.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.0
Right Flare	(%)	6.7
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 1.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3649 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
81

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.2
Right Flare	(%)	7.6
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4 1.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3647 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
76

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.5
Right Flare	(%)	7.9
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.3 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3648 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
84

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.6
Right Flare	(%)	5.8
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and D St $12,250.00

ENE Perpendicular

4045 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**3.3**
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	9.7
Right Flare	(%)	6.3
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.0 0.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

ESE Perpendicular

4044 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.0 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4040 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
44

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.7
Right Flare	(%)	7.6
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.8 1.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SSE Perpendicular

4043 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
44

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 12.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	101.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	57.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	7.0
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.4 0.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4042 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
54

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 12.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.5
Right Flare	(%)	7.0
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4041 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.5
Right Flare	(%)	5.5
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.7 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and E Cleveland Ave **$22,000.00**

N No Sidewalk, Curb Ramp Not Required

4051 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Driveway

4050 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and E Yosemite Ave $0.00

NW Pedestrian Pad

4046 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
39

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	1.0
X Slope of the Ramp / Pad	(%)	0.1

Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

4049 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 21.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	1.4
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**21.0**
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.5
Right Flare	(%)	9.4
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3 1.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4047 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.1
Right Flare	(%)	6.1
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1 1.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4048 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Unit Cost **$500.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.0
Right Flare	(%)	7.4
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave *and* Elm Ave **$10,750.00**

E Perpendicular

4353 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.1
Right Flare	(%)	7.7
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

4352 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

4351 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.7
Right Flare	(%)	6.3
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and Flume St **$21,000.00**

N Perpendicular

4344 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
61

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	64.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.2**
Right Flare	(%)	8.9
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4343 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4342 Ramp Flare

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$3250.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.7
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave *and* High St **$13,250.00**

N Parallel

4347 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 8.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Unit Cost **$500.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	54.0
Length of Ramp / Pad	(in)	N/A	224.0
Slope of the Ramp / Pad	(%)	N/A	5.6
X Slope of the Ramp / Pad	(%)	N/A	0.4
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.5
Top Landing X Slope	(%)	N/A	1.5

Bottom Landing Length	(in)	76.0
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.0 2.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4345 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

4346 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
62

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and Lyons St **$10,750.00**

E No Sidewalk, Curb Ramp Not Required

3271 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Parallel

3270 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 4.3%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)	57.5	73.0
Length of Ramp / Pad	(in)	107.0	132.0
Slope of the Ramp / Pad	(%)	7.2	6.3
X Slope of the Ramp / Pad	(%)	1.2	0.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.2
Top Landing X Slope	(%)	**4.3**	1.1

Bottom Landing Length	(in)	146.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3269 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.
- *Notes:* BL Length: 61.0"
  BL Slope: 0.4%

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
54

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	170.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.8 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and Mace St **$6,750.00**

E No Sidewalk, Curb Ramp Not Required

3246 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3244 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3245 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **E Yosemite Ave** ***and*** **Magnolia St** **$7,000.00**

E Perpendicular

4467 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
70

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 12.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.7
Right Flare	(%)	7.8
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	4.0 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4466 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
75

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	64.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.8
Right Flare	(%)	7.5
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	4.0 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4468 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.9
Right Flare	(%)	6.9
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.1	1.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4465 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 12.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
70

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	6.6
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.6	3.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and N A St **$7,250.00**

E Perpendicular

4461 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
60

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 11.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.8
Right Flare	(%)	6.1
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	4.8 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4464 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
60

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 12.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.4
Right Flare	(%)	6.6
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	6.3 0.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4462 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
65

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 5.4%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.8
Right Flare	(%)	7.5
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.1	3.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4463 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
60

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 11.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.7
Right Flare	(%)	6.8
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	4.9	2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and N B St **$4,500.00**

E Parallel

3654 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.6%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	60.0
Length of Ramp / Pad	(in)	150.0	159.0
Slope of the Ramp / Pad	(%)	5.6	4.8
X Slope of the Ramp / Pad	(%)	0.2	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	**2.5**
Top Landing X Slope	(%)	**3.6**	1.4

Bottom Landing Length	(in)	176.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

3653 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 8.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	55.0
Length of Ramp / Pad	(in)	111.0	143.0
Slope of the Ramp / Pad	(%)	5.9	4.8
X Slope of the Ramp / Pad	(%)	0.4	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.4
Top Landing X Slope	(%)	0.4	0.7

Bottom Landing Length	(in)	177.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.2 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

3651 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 6.2%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	73.0
Length of Ramp / Pad	(in)	123.0	136.0
Slope of the Ramp / Pad	(%)	6.6	5.7
X Slope of the Ramp / Pad	(%)	0.7	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.4
Top Landing X Slope	(%)	1.2	**6.2**

Bottom Landing Length	(in)	176.0
Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Parallel

3652 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8% Right: 4.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	68.0	66.0
Length of Ramp / Pad	(in)	180.0	171.0
Slope of the Ramp / Pad	(%)	6.4	5.8
X Slope of the Ramp / Pad	(%)	0.4	1.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.4
Top Landing X Slope	(%)	**2.8**	**4.1**

Bottom Landing Length	(in)	152.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	1.4
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.3 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and N C St **$11,000.00**

E Parallel

4482 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 7.1% Right: 8.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
88

		LEFT	RIGHT
Width of Ramp / Pad	(in)	70.0	53.0
Length of Ramp / Pad	(in)	106.0	155.0
Slope of the Ramp / Pad	(%)	1.9	2.0
X Slope of the Ramp / Pad	(%)	**7.1**	**8.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**8.2**	**7.8**
Top Landing X Slope	(%)	**6.2**	1.4

Bottom Landing Length	(in)	80.0
Bottom Landing Slope	(%)	**10.3**
Bottom Landing X Slope	(%)	**7.1**
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	**8.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	6.7 9.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4480 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
89

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	2.0
X Slope of the Ramp / Pad	(%)	**4.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**10.6**
Top Landing X Slope	(%)	**3.6**

Left Flare	(%)	8.8
Right Flare	(%)	1.5
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	**9.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	11.4 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4483 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
90

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	0.2
X Slope of the Ramp / Pad	(%)	**7.8**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**5.9**
Top Landing X Slope	(%)	**7.8**

Left Flare	(%)	0.7
Right Flare	(%)	1.2
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	**7.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	5.1	8.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Curb Ramp Required

4481 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
158

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **E Yosemite Ave** ***and*** **N E St** **$27,000.00**

NE Perpendicular

2872 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.6
Right Flare	(%)	6.3
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2871 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.5
Right Flare	(%)	6.7
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2873 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2874 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 10.1%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.5
Right Flare	(%)	9.0
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.4
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and Pecan Ave **$19,500.00**

E Perpendicular

4484 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
112

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**15.2**
X Slope of the Ramp / Pad	(%)	**10.2**
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	**6.3**
Top Landing X Slope	(%)	**10.4**

Left Flare	(%)	2.8
Right Flare	(%)	**13.0**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	**10.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	6.5 12.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4487 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 6.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	0.3
X Slope of the Ramp / Pad	(%)	**6.4**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**6.7**
Top Landing X Slope	(%)	**6.9**

Left Flare	(%)	1.5
Right Flare	(%)	2.1
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	**6.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	7.2 4.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4485 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 6.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	108.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	**6.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	**5.9**

Left Flare	(%)	3.1
Right Flare	(%)	2.1
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	**6.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	10.5 5.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Parallel

4486 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.6% Right: 8.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
102

		LEFT	RIGHT
Width of Ramp / Pad	(in)	112.0	96.0
Length of Ramp / Pad	(in)	57.0	85.0
Slope of the Ramp / Pad	(%)	0.3	1.9
X Slope of the Ramp / Pad	(%)	**5.6**	**8.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	5.3	**6.5**
Top Landing X Slope	(%)	**6.2**	**8.4**

Bottom Landing Length	(in)	66.0
Bottom Landing Slope	(%)	**9.0**
Bottom Landing X Slope	(%)	**7.0**
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	**8.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	6.4 7.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and S Gateway Dr **$26,500.00**

E Perpendicular

4489 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
93

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	1.2
X Slope of the Ramp / Pad	(%)	**7.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.6**
Top Landing X Slope	(%)	**8.1**

Left Flare	(%)	0.4
Right Flare	(%)	0.8
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	**6.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	7.1 7.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4490 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
114

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**14.0**
X Slope of the Ramp / Pad	(%)	**7.7**
Top Landing Length	(in)	64.0
Top Landing Slope	(%)	**6.9**
Top Landing X Slope	(%)	**7.7**

Left Flare	(%)	1.0
Right Flare	(%)	0.4
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	**6.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	4.0 6.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4488 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 5.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	0.2
X Slope of the Ramp / Pad	(%)	**5.7**
Top Landing Length	(in)	54.0
Top Landing Slope	(%)	**5.7**
Top Landing X Slope	(%)	**6.2**

Left Flare	(%)	0.5
Right Flare	(%)	0.3
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	**7.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	6.9 9.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

4491 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 6.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	0.2
X Slope of the Ramp / Pad	(%)	**6.9**
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	**7.7**

Left Flare	(%)	1.9
Right Flare	(%)	1.8
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	**6.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.7 7.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : E Yosemite Ave and S Lake St **$26,000.00**

E No Sidewalk, Curb Ramp Not Required

4038 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

NW No Sidewalk, Curb Ramp Not Required

4039 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

4037 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : E Yosemite Ave *and* Storey Rd **$0.00**

N Parallel

4348 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.3%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	124.0	120.0
Slope of the Ramp / Pad	(%)	7.3	7.5
X Slope of the Ramp / Pad	(%)	**2.1**	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.6
Top Landing X Slope	(%)	**2.3**	1.1

Bottom Landing Length	(in)	76.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.2	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

4349 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

4350 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.0
Right Flare	(%)	8.0
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : E Yosemite Ave and Vineyard Ave **$17,000.00**

Total Costs for Curb Ramps along : E Yosemite Ave **$268,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1489	Echo St	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
W	Driveway			

2168 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Echo St and **$0.00**

Total Costs for Curb Ramps along : Echo St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	855	Eighth St	S H St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4223 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**13.4**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	3.5 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Perpendicular

4222 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 29.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**29.0**
Top Landing Slope	(%)	**5.7**
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	**10.8**
Right Flare	(%)	9.3
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	2.4	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

4221 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Eighth St and S H St **$14,000.00**

E Combination

137 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
79

		LEFT	RIGHT
Width of Ramp / Pad	(in)	57.0	57.0
Length of Ramp / Pad	(in)	**37.0**	**37.0**
Slope of the Ramp / Pad	(%)	7.5	7.8
X Slope of the Ramp / Pad	(%)	0.4	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.3
Top Landing X Slope	(%)	**2.7**	1.7
Length of Combo. Ramp	(in)	76.0	
Combo. Ramp Slope	(%)	10.2	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	**27.0**	
Bottom Landing Slope	(in)	**2.2**	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**10.5**	
Right Flare	(%)	8.7	
Gutter Slope	(%)	**11.1**	
Gutter XSlope	(%)	0.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.3	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

140 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Left: 10.1%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
83

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	N/A
Length of Ramp / Pad	(in)	85.0	N/A
Slope of the Ramp / Pad	(%)	4.0	N/A
X Slope of the Ramp / Pad	(%)	0.5	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	1.3	N/A
Top Landing X Slope	(%)	**2.2**	N/A
Length of Combo. Ramp	(in)	79.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	**36.0**	
Bottom Landing Slope	(in)	**4.1**	
Bottom Landing X Slope	(in)	**3.4**	
Left Flare	(%)	**10.1**	
Right Flare	(%)	9.6	
Gutter Slope	(%)	**6.1**	
Gutter XSlope	(%)	**3.2**	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.6	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

138 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	118.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.0**
Right Flare	(%)	9.1
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

139 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	117.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.5
Right Flare	(%)	**10.1**
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Eighth St and S J St **$28,000.00**

E Combination

130 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	56.0
Length of Ramp / Pad	(in)	**36.0**	**36.0**
Slope of the Ramp / Pad	(%)	7.2	5.4
X Slope of the Ramp / Pad	(%)	0.6	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.1
Top Landing X Slope	(%)	**2.2**	2.0
Length of Combo. Ramp	(in)	79.0	
Combo. Ramp Slope	(%)	8.3	
Combo. Ramp X Slope	(%)	1.1	
Bottom Landing Length	(in)	**38.0**	
Bottom Landing Slope	(in)	**4.4**	
Bottom Landing X Slope	(in)	1.1	
Left Flare	(%)	**11.4**	
Right Flare	(%)	**13.3**	
Gutter Slope	(%)	**8.5**	
Gutter XSlope	(%)	**2.3**	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.9	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

127 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.1
Left Flare	(%)	**10.2**
Right Flare	(%)	**11.2**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	1.8 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

129 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 24.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**24.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	**12.4**
Right Flare	(%)	**13.4**
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

128 Ramp Slope

- *As-Built Description:*

Cross slope of an existing combination ramp run exceeds 1:48 (2%).

- *As-is* 2.9%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
73

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**35.0**	**35.0**
Slope of the Ramp / Pad	(%)	5.8	6.3
X Slope of the Ramp / Pad	(%)	1.2	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.1
Top Landing X Slope	(%)	**2.3**	2.0

Length of Combo. Ramp	(in)	84.0
Combo. Ramp Slope	(%)	7.2
Combo. Ramp X Slope	(%)	**2.9**

Bottom Landing Length	(in)	**38.0**
Bottom Landing Slope	(in)	**5.8**
Bottom Landing X Slope	(in)	1.8
Left Flare	(%)	**12.1**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Eighth St and S K St **$28,000.00**

Total Costs for Curb Ramps along : **Eighth St** **$70,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	375	Eisenhower Ln	Coolidge St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2028 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2029 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.4
Right Flare	(%)	1.5
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2030 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.6**
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	3.0
Right Flare	(%)	7.2
Gutter Slope	(%)	**16.2**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Eisenhower Ln *and* Coolidge St **$20,000.00**

NW Curb Ramp Required

2037 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2038 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	10.0
Right Flare	(%)	5.8
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Eisenhower Ln and Madison Dr **$13,500.00**

NE Curb Ramp Required

1954 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1955 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.9

Left Flare	(%)	7.8
Right Flare	(%)	9.9
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Eisenhower Ln** ***and*** **Truman Dr** **$13,500.00**

Total Costs for Curb Ramps along : **Eisenhower Ln** **$47,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	912	El Dorado Dr	Madera Ave

NE — Perpendicular

3571 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 8.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
40

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	8.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.1
Right Flare	(%)	8.3
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.5
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.2 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Curb Ramp Required

3570 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3572 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**7.1**
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	6.4
Right Flare	(%)	4.8
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **El Dorado Dr** ***and*** **Madera Ave** **$16,750.00**

Total Costs for Curb Ramps along : **El Dorado Dr** **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1510	El Monte Ave	Stadium Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

392 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
147

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

390 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	56.5
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.1
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

394 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.8
Right Flare	(%)	0.4
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

391 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.5
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.2
Right Flare	(%)	**13.4**
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

WSW Perpendicular

393 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	62.5
Length of Ramp / Pad	(in)	63.5
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.7
Right Flare	(%)	5.2
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : El Monte Ave and Stadium Rd **$33,000.00**

Total Costs for Curb Ramps along : El Monte Ave **$33,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1189	El Monte Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

355 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

356 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.0
Right Flare	(%)	4.3
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

354 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **El Monte Ct** ***and*** **Monterey St** **$10,000.00**

Total Costs for Curb Ramps along : **El Monte Ct** **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1508	El Monte St	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SW **Perpendicular**

319 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.3
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **El Monte St** ***and*** **$6,500.00**

Total Costs for Curb Ramps along : **El Monte St** **$6,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	411	Elm Ave	Santa Fe Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3221 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

3219 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.4
Right Flare	(%)	8.5
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3220 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**3.1**

Left Flare	(%)	**11.4**
Right Flare	(%)	6.3
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	**3.7**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Elm Ave *and* Santa Fe Ct **$16,000.00**

E Perpendicular

3216 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.2
Right Flare	(%)	5.0
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3217 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
42

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.3
Right Flare	(%)	5.9
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3218 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Elm Ave and Santa Fe St **$10,000.00**

Total Costs for Curb Ramps along : Elm Ave **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	143	Emerald Way	Scarlet Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N **Parallel**

4437 Ramp Landing

- *As-Built Description:*

Running slope at bottom landing of existing parallel curb ramp exceeds 2%.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing bottom landing and provide new, including detectable warning surface. Ramp to remain.

CBC 2019 **11B-406.3.2**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	82.0	82.0
Slope of the Ramp / Pad	(%)	7.6	7.8
X Slope of the Ramp / Pad	(%)	0.1	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.8
Top Landing X Slope	(%)	0.4	1.4

Bottom Landing Length	(in)	61.0
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	0.8	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

4439 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
28

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	7.6
Right Flare	(%)	9.9
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.0 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4438 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
26

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.1**
Right Flare	(%)	7.0
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	0.2 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Emerald Way and Scarlet Dr **$17,500.00**

NE Perpendicular

4441 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.6
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.7 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4442 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 4.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
24

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	**4.7**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**4.4**

Left Flare	(%)	8.8
Right Flare	(%)	3.6
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.6 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **No Sidewalk, Curb Ramp Not Required**

4440 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Emerald Way** ***and*** **Storey Rd** **$10,250.00**

Total Costs for Curb Ramps along : **Emerald Way** **$27,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	371	Emily Way	Bo Tree Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2925 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2924 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.8

Left Flare	(%)	4.3
Right Flare	(%)	7.8
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2923 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.8
Right Flare	(%)	6.0
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	0.2 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Emily Way and Bo Tree Ln **$9,500.00**

NE No Sidewalk, Curb Ramp Not Required

2911 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW Perpendicular

2910 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.2
Right Flare	(%)	4.5
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.0 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2912 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Emily Way and Gary Ln **$13,500.00**

NW Perpendicular

2887 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	3.7
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	1.9
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2889 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW Perpendicular

2888 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.1
Right Flare	(%)	4.2
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.9 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Emily Way and Joya Dr **$9,750.00**

Total Costs for Curb Ramps along : Emily Way **$32,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	681	Express Ct	Glade Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2271 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.7
Right Flare	(%)	9.0
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2272 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.4**
Right Flare	(%)	8.1
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2273 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Express Ct and Glade Ave **$20,000.00**

Total Costs for Curb Ramps along : Express Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1496	Fairfield Way	

NW — Curb Ramp Required

2345 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2343 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
5

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.0
Right Flare	(%)	6.6
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2344 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.8
Right Flare	(%)	4.4
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fairfield Way and **$16,500.00**

Total Costs for Curb Ramps along : Fairfield Way **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1325	Fairview Ave	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Combination			

524 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 44.0" Right: 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**44.0**	**44.0**
Length of Ramp / Pad	(in)	80.0	83.0
Slope of the Ramp / Pad	(%)	3.2	4.9
X Slope of the Ramp / Pad	(%)	0.9	0.5
Top Landing Length	(in)	0.4	0.1
Top Landing Slope	(%)	1.0	1.2
Top Landing X Slope	(%)		
Length of Combo. Ramp	(in)	50.0	
Combo. Ramp Slope	(%)	5.4	
Combo. Ramp X Slope	(%)	1.8	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.4	
Bottom Landing X Slope	(in)	1.6	
Left Flare	(%)	8.5	
Right Flare	(%)	9.5	
Gutter Slope	(%)	**9.3**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.0	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

523 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 44.0" Right: 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**44.0**	**44.0**
Length of Ramp / Pad	(in)	**39.0**	**37.0**
Slope of the Ramp / Pad	(%)	3.6	3.8
X Slope of the Ramp / Pad	(%)	1.6	0.1
Top Landing Length	(in)	0.9	0.8
Top Landing Slope	(%)	1.6	1.5
Top Landing X Slope	(%)		
Length of Combo. Ramp	(in)	50.0	
Combo. Ramp Slope	(%)	8.0	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.6	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	9.0	
Right Flare	(%)	7.8	
Gutter Slope	(%)	**9.8**	
Gutter XSlope	(%)	1.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

525 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 38.5" Right: 38.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**38.5**	**38.0**
Length of Ramp / Pad	(in)	76.0	70.0
Slope of the Ramp / Pad	(%)	3.2	4.2
X Slope of the Ramp / Pad	(%)	0.7	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.3
Top Landing X Slope	(%)	**3.4**	1.1
Length of Combo. Ramp	(in)	50.0	
Combo. Ramp Slope	(%)	6.7	
Combo. Ramp X Slope	(%)	1.4	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.3	
Bottom Landing X Slope	(in)	0.7	
Left Flare	(%)	**10.2**	
Right Flare	(%)	9.3	
Gutter Slope	(%)	**10.1**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	Non-Compliant	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

522 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fairview Ave** ***and*** **Fifth St** **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

494 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

493 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Combination

496 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* Left: 37.0" Right: 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**37.0**	**37.0**
Length of Ramp / Pad	(in)	64.0	69.0
Slope of the Ramp / Pad	(%)	5.3	4.2
X Slope of the Ramp / Pad	(%)	1.8	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.0
Top Landing X Slope	(%)	1.3	1.4

Length of Combo. Ramp	(in)	50.5
Combo. Ramp Slope	(%)	8.5
Combo. Ramp X Slope	(%)	1.5

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	1.3
Bottom Landing X Slope	(in)	1.1
Left Flare	(%)	7.6
Right Flare	(%)	6.3
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.9	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

495 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 37.0" Right: 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**37.0**	**37.0**
Length of Ramp / Pad	(in)	71.0	**39.0**
Slope of the Ramp / Pad	(%)	5.9	8.1
X Slope of the Ramp / Pad	(%)	0.1	**3.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.7
Top Landing X Slope	(%)	2.0	1.8
Length of Combo. Ramp	(in)	51.0	
Combo. Ramp Slope	(%)	6.3	
Combo. Ramp X Slope	(%)	1.5	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.0	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	8.5	
Right Flare	(%)	9.9	
Gutter Slope	(%)	**13.7**	
Gutter XSlope	(%)	**3.1**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.4	3.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Fairview Ave *and* Fourth St** **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

455 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

454 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

456 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

457 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fairview Ave** ***and*** **Third St** **$0.00**

Total Costs for Curb Ramps along : **Fairview Ave** **$35,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	331	Fairview St	Adell St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

4494 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

4493 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

4492 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

***Total Costs for Curb Ramps at :* Fairview St *and* Adell St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

3864 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW No Sidewalk, Curb Ramp Not Required

3863 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

S No Sidewalk, Curb Ramp Not Required

3865 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Fairview St and W Clark St **$0.00**

Total Costs for Curb Ramps along : Fairview St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	213	Fall Ave	Westgate Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1741 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

1740 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **No Sidewalk, Curb Ramp Not Required**

1739 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fall Ave and Westgate Dr **$0.00**

Total Costs for Curb Ramps along : Fall Ave **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	29	Ficklin Dr	Chatom Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

228 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

229 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 10.4%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.7
Right Flare	(%)	2.9
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

230 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.9
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7 2.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ficklin Dr and Chatom Way **$13,250.00**

Total Costs for Curb Ramps along : Ficklin Dr **$13,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	873	Fifth St	N J St

E Perpendicular

173 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
75

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.0
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

174 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

175 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	104.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.7
Right Flare	(%)	6.5
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.8 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fifth St *and* N J St **$17,250.00**

E Perpendicular

180 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 23.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
75

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**23.0**
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.5
Right Flare	(%)	**11.9**
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.2 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

181 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 23.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
72

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**23.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**13.0**
Right Flare	(%)	8.1
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

182 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	99.0	99.0
Slope of the Ramp / Pad	(%)	4.9	6.9
X Slope of the Ramp / Pad	(%)	1.5	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	1.6
Top Landing X Slope	(%)	2.0	0.6

Bottom Landing Length	(in)	129.0
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

183 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	75.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.4**
Right Flare	(%)	9.9
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Parallel

187 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	99.0	99.0
Slope of the Ramp / Pad	(%)	4.9	6.9
X Slope of the Ramp / Pad	(%)	1.5	1.3
Top Landing Length	(in)	48.	48.0
Top Landing Slope	(%)	0.1	1.6
Top Landing X Slope	(%)	2.0	0.6

Bottom Landing Length	(in)	129.0
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	3.0	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fifth St and N L St **$26,500.00**

E Combination

184 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.9%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
67

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	91.0	91.0
Slope of the Ramp / Pad	(%)	4.9	6.9
X Slope of the Ramp / Pad	(%)	1.3	**2.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.5
Top Landing X Slope	(%)	1.2	**2.9**
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	8.0	
Combo. Ramp X Slope	(%)	0.8	
Bottom Landing Length	(in)	**43.0**	
Bottom Landing Slope	(in)	1.0	
Bottom Landing X Slope	(in)	0.0	
Left Flare	(%)	8.4	
Right Flare	(%)	7.7	
Gutter Slope	(%)	**9.8**	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

185 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.9%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
76

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	66.0	60.0
Slope of the Ramp / Pad	(%)	2.8	5.9
X Slope of the Ramp / Pad	(%)	0.8	**2.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.2
Top Landing X Slope	(%)	**4.7**	2.0
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	9.2	
Combo. Ramp X Slope	(%)	0.8	
Bottom Landing Length	(in)	**32.0**	
Bottom Landing Slope	(in)	**2.9**	
Bottom Landing X Slope	(in)	.0	
Left Flare	(%)	**13.3**	
Right Flare	(%)	**11.3**	
Gutter Slope	(%)	**7.7**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.6	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

188 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Left: 11.6% Right: 10.9%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	N/A
Length of Ramp / Pad	(in)	102.0	N/A
Slope of the Ramp / Pad	(%)	6.7	N/A
X Slope of the Ramp / Pad	(%)	0.1	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.6	N/A
Top Landing X Slope	(%)	1.6	N/A
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	7.8	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	**32.0**	
Bottom Landing Slope	(in)	1.5	
Bottom Landing X Slope	(in)	0.2	
Left Flare	(%)	**11.6**	
Right Flare	(%)	**10.9**	
Gutter Slope	(%)	**9.0**	
Gutter XSlope	(%)	0.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.0	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

186 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	53.0
Length of Ramp / Pad	(in)	N/A	63.0
Slope of the Ramp / Pad	(%)	N/A	4.1
X Slope of the Ramp / Pad	(%)	N/A	1.2
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	0.2
Top Landing X Slope	(%)	N/A	**2.4**
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	**20.0**	
Bottom Landing Slope	(in)	**2.3**	
Bottom Landing X Slope	(in)	**2.1**	
Left Flare	(%)	**10.3**	
Right Flare	(%)	9.8	
Gutter Slope	(%)	**7.3**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fifth St and N M St **$24,500.00**

E Curb Ramp Required

189 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Combination

190 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.4% Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
84

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	123.0	123.0
Slope of the Ramp / Pad	(%)	2.2	3.1
X Slope of the Ramp / Pad	(%)	**5.4**	**3.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.4
Top Landing X Slope	(%)	1.9	1.6

Length of Combo. Ramp	(in)	74.0
Combo. Ramp Slope	(%)	7.8
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	**32.0**
Bottom Landing Slope	(in)	**11.3**
Bottom Landing X Slope	(in)	1.0
Left Flare	(%)	7.2
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

192 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
78

		LEFT	RIGHT
Width of Ramp / Pad	(in)	46.0	N/A
Length of Ramp / Pad	(in)	300.0	N/A
Slope of the Ramp / Pad	(%)	0.7	N/A
X Slope of the Ramp / Pad	(%)	0.2	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.1	N/A
Top Landing X Slope	(%)	1.1	N/A
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	8.6	
Combo. Ramp X Slope	(%)	1.8	
Bottom Landing Length	(in)	20.0	
Bottom Landing Slope	(in)	0.9	
Bottom Landing X Slope	(in)	1.9	
Left Flare	(%)	9.7	
Right Flare	(%)	12.6	
Gutter Slope	(%)	10.6	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	Not Contrasting	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.2	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

191 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Left: 13.3% Right: 11.8%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	54.0
Length of Ramp / Pad	(in)	N/A	58.0
Slope of the Ramp / Pad	(%)	N/A	5.6
X Slope of the Ramp / Pad	(%)	N/A	0.9
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.1
Top Landing X Slope	(%)	N/A	1.8
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	8.6	
Combo. Ramp X Slope	(%)	1.8	
Bottom Landing Length	(in)	32.0	
Bottom Landing Slope	(in)	0.5	
Bottom Landing X Slope	(in)	0.7	
Left Flare	(%)	13.3	
Right Flare	(%)	11.8	
Gutter Slope	(%)	8.5	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	Not Contrasting	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.5	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fifth St and N N St **$28,000.00**

E Perpendicular

619 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.5
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.5**
Right Flare	(%)	9.6
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

620 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.2%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.5	48.0
Length of Ramp / Pad	(in)	120.0	120.0
Slope of the Ramp / Pad	(%)	4.7	3.3
X Slope of the Ramp / Pad	(%)	0.1	**2.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.6
Top Landing X Slope	(%)	1.0	1.4

Length of Combo. Ramp	(in)	69.0
Combo. Ramp Slope	(%)	9.5
Combo. Ramp X Slope	(%)	0.0

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	0.9
Bottom Landing X Slope	(in)	0.1
Left Flare	(%)	**11.9**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**14.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

618 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	N/A
Length of Ramp / Pad	(in)	94.0	N/A
Slope of the Ramp / Pad	(%)	5.1	N/A
X Slope of the Ramp / Pad	(%)	0.2	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.4	N/A
Top Landing X Slope	(%)	0.7	N/A
Length of Combo. Ramp	(in)	70.0	
Combo. Ramp Slope	(%)	6.7	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	8.4	
Right Flare	(%)	6.3	
Gutter Slope	(%)	**10.5**	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	

Street Grade (Left / Right)	(%)	2.7	2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

617 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fifth St and N O St **$16,500.00**

NE No Sidewalk, Curb Ramp Not Required

2728 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
59

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2729 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE Perpendicular

2727 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
87

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**13.5**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 2.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fifth St and Pine St **$6,500.00**

Total Costs for Curb Ramps along : Fifth St **$119,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1017	Fig Ave	Cross St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

3182 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — No Sidewalk, Curb Ramp Not Required

3180 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

3181 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
53

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.6
Right Flare	(%)	7.5
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fig Ave *and* Cross St **$3,250.00**

E Perpendicular

3183 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
49

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.9
Right Flare	(%)	5.2
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

3185 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3184 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fig Ave** ***and*** **E Yosemite Ave** **$10,000.00**

N No Sidewalk, Curb Ramp Not Required

3187 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3188 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

3186 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fig Ave** ***and*** **Washington St** **$0.00**

Total Costs for Curb Ramps along : **Fig Ave** **$13,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	170	Fillmore Ave	Imperial Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

696 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.7
Right Flare	(%)	7.7
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

697 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 34.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.3**
Right Flare	(%)	7.1
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

695 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fillmore Ave and Imperial Dr **$21,000.00**

Total Costs for Curb Ramps along : Fillmore Ave **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	803	Fisk Ct	Central Pl

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

840 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.7
Right Flare	(%)	7.6
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

841 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**10.9**
Right Flare	(%)	7.0
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

839 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fisk Ct and Central Pl **$17,250.00**

Total Costs for Curb Ramps along : Fisk Ct **$17,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	323	Forum Way	Glenville Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2319 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2320 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.0
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2321 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**11.1**
Right Flare	(%)	9.5
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Forum Way *and* Glenville Ave** **$16,500.00**

NE Perpendicular

2304 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.4
Right Flare	(%)	**10.8**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2303 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.3
Right Flare	(%)	6.4
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2301 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.0
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2302 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.0
Right Flare	(%)	6.9
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Forum Way** ***and*** **N Westberry Blv** **$26,000.00**

Total Costs for Curb Ramps along : **Forum Way** **$42,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1198	Foster Ave	N Park Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

927 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

929 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

928 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Foster Ave** ***and*** **N Park Dr** **$0.00**

Total Costs for Curb Ramps along : **Foster Ave** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	254	Fountain Way	Wessmith Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2199 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.8
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2196 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.6**
Right Flare	(%)	8.2
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2198 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.2
Right Flare	(%)	**10.5**
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2197 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.0
Right Flare	(%)	8.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fountain Way *and* Wessmith Way **$26,000.00**

E Curb Ramp Required

2193 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2194 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	76.0
Length of Ramp / Pad	(in)	85.5
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.2**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.1
Right Flare	(%)	6.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2195 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	68.5
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.6

Left Flare	(%)	6.3
Right Flare	(%)	4.2
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fountain Way and Wrenwood Way **$16,750.00**

***Total Costs for Curb Ramps along :* Fountain Way** **$42,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1392	Fourth St	Krest St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

580 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

579 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

581 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

578 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fourth St** ***and*** **Krest St** **$0.00**

E Curb Ramp Required

980 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
147

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

979 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.6
Right Flare	(%)	8.8
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.7	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

981 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
67

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	2.9
Top Landing Length	(in)	35.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	10.1
Right Flare	(%)	10.6
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	0.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fourth St *and* N K St — $21,000.00

E Perpendicular

204 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	42.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.8
Right Flare	(%)	10.9
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	1.1	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

203 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.8**
Right Flare	(%)	8.2
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

201 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**8.8**

Left Flare	(%)	8.3
Right Flare	(%)	7.2
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.5	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

202 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.5
Right Flare	(%)	**12.7**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fourth St *and* N L St **$28,000.00**

E Perpendicular

200 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	7.3
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

199 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.9
Right Flare	(%)	9.3
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

197 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.8

Left Flare	(%)	10.0
Right Flare	(%)	7.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

198 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.4
Right Flare	(%)	9.4
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fourth St *and* N M St **$28,000.00**

E Perpendicular

512 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 0.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	5.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

510 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
159

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

511 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.8
Right Flare	(%)	5.5
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fourth St and N P St **$10,500.00**

NE Combination

500 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Right: 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	**37.0**
Length of Ramp / Pad	(in)	N/A	56.5
Slope of the Ramp / Pad	(%)	N/A	5.7
X Slope of the Ramp / Pad	(%)	N/A	**3.7**
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	0.7
Top Landing X Slope	(%)	N/A	**2.9**
Length of Combo. Ramp	(in)	52.5	
Combo. Ramp Slope	(%)	7.4	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	2.0	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	8.7	
Right Flare	(%)	9.0	
Gutter Slope	(%)	**17.5**	
Gutter XSlope	(%)	0.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.9	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

497 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

499 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**37.0**	N/A
Length of Ramp / Pad	(in)	90.0	N/A
Slope of the Ramp / Pad	(%)	4.1	N/A
X Slope of the Ramp / Pad	(%)	0.9	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	1.1	N/A
Length of Combo. Ramp	(in)	52.0	
Combo. Ramp Slope	(%)	8.4	
Combo. Ramp X Slope	(%)	1.3	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.0	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**10.5**	
Right Flare	(%)	8.0	
Gutter Slope	(%)	**15.6**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.1	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

498 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 37.0" Right: 37.5"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**37.0**	**37.5**
Length of Ramp / Pad	(in)	57.0	**39.0**
Slope of the Ramp / Pad	(%)	**9.1**	**11.2**
X Slope of the Ramp / Pad	(%)	1.3	**3.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	2.4
Top Landing X Slope	(%)	**2.3**	1.5
Length of Combo. Ramp	(in)	51.0	
Combo. Ramp Slope	(%)	7.1	
Combo. Ramp X Slope	(%)	1.1	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.2	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	**10.1**	
Right Flare	(%)	7.8	
Gutter Slope	(%)	**10.8**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.2	4.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Fourth St and Rotan Ave **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

598 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

597 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

599 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

600 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fourth St** ***and*** **Schnoor Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

576 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

577 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

575 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fourth St and Shannon Ave **$0.00**

NE No Sidewalk, Curb Ramp Not Required

488 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

487 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

486 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fourth St** ***and*** **Williams Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

491 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

490 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

492 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

489 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Fourth St *and* Willis Ave** **$0.00**

***Total Costs for Curb Ramps along :* Fourth St** **$108,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	697	Foxglove Way	N Granada Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2417 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**13.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.0
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	0.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2418 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.3**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.2
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2416 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	7.7
Right Flare	(%)	7.2
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Foxglove Way and N Granada Dr **$19,500.00**

NW Curb Ramp Required

2419 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2421 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.3
Right Flare	(%)	6.4
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2420 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 14.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**14.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.5

Left Flare	(%)	8.3
Right Flare	(%)	.6.1
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Foxglove Way *and* Sundance Ln **$20,000.00**

NE Perpendicular

2392 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.1
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2393 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**12.1**
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.3 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2391 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.3**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2390 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.3
Right Flare	(%)	4.5
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Foxglove Way and W Cleveland Ave **$26,000.00**

Total Costs for Curb Ramps along : Foxglove Way **$65,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	680	Fresno St	Daulton Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

4077 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

4076 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4078 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4079 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fresno St** ***and*** **Daulton Ave** **$0.00**

N Curb Ramp Required

2232 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2233 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2234 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Fresno St *and* E Clark St $7,000.00

NE No Sidewalk, Curb Ramp Not Required

4107 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4106 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Curb Ramp Required

4104 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
146

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **Curb Ramp Required**

4105 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
136

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Fresno St** ***and*** **E Lincoln Ave** **$14,000.00**

Total Costs for Curb Ramps along : **Fresno St** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1076	Gamay Ave	Barbera Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2543 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2542 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.4
Right Flare	(%)	5.7
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2544 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
25

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**13.3**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.2
Right Flare	(%)	6.8
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Gamay Ave and Barbera Ave **$20,000.00**

NE Curb Ramp Required

2546 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2545 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.3
Right Flare	(%)	6.5
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2547 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.7
Right Flare	(%)	7.8
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gamay Ave and Chablis Ave **$16,500.00**

NE Perpendicular

395 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	3.1
Right Flare	(%)	4.4
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Gamay Ave and Fair Oak Ave **$6,500.00**

NW Curb Ramp Required

2541 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2561 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2539 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2540 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.6
Right Flare	(%)	6.8
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2562 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gamay Ave and Petite Ave **$30,000.00**

NE Perpendicular

2585 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.8
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2582 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	3.9
Right Flare	(%)	8.2
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2584 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
2

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.2
Right Flare	(%)	7.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.1 3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2583 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.2
Right Flare	(%)	6.4
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gamay Ave and S Timberline Dr **$15,750.00**

E Curb Ramp Required

397 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
147

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

398 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.9
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	3.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

399 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	7.4
Right Flare	(%)	6.0
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Non-Compliant
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

WNW Perpendicular

396 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.8

Left Flare	(%)	9.1
Right Flare	(%)	8.3
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**

Street Grade (Left / Right)	(%)	0.7 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gamay Ave and Stadium Rd **$26,500.00**

NE Perpendicular

2580 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
10

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.6
Right Flare	(%)	6.3
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2581 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2579 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.5
Right Flare	(%)	3.8
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Gamay Ave and Westberry Blvd **$7,000.00**

Total Costs for Curb Ramps along : Gamay Ave **$122,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	946	Gamay St	Blueridge Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

420 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.2
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

419 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.5
Right Flare	(%)	8.0
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

418 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gamay St and Blueridge Dr **$20,000.00**

NE Perpendicular

417 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	58.5
Length of Ramp / Pad	(in)	54.5
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.1**
Right Flare	(%)	**11.2**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

416 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
59

Width of Ramp / Pad	(in)	54.5
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.1
Right Flare	(%)	4.3
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.0
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

415 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
147

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Gamay St** ***and*** **Stadium Rd** **$16,500.00**

Total Costs for Curb Ramps along : **Gamay St** **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	831	Garfield Ave	Fresno St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

4110 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

4109 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4111 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4108 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Garfield Ave** ***and*** **Fresno St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

4113 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4112 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4114 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4115 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Garfield Ave** ***and*** **Merced St** **$0.00**

NE Perpendicular

4136 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.7
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.9 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4138 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.6
Right Flare	(%)	8.2
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.8 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4137 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Garfield Ave** ***and*** **N Lake St** **$21,000.00**

E Curb Ramp Required

4117 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4116 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4118 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Garfield Ave** ***and*** **Tulare St** **$7,000.00**

Total Costs for Curb Ramps along : **Garfield Ave** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1197	Gary Ln	Colombard Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

288 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.5
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.3**
Right Flare	(%)	4.8
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

289 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	10.0
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

287 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.5
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.3
Right Flare	(%)	6.0
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

286 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	5.3
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Gary Ln and Colombard Dr **$16,250.00**

NE Perpendicular

284 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.3**
Right Flare	(%)	8.9
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

283 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.7
Right Flare	(%)	8.9
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

285 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.3
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

282 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	**10.8**
Right Flare	(%)	5.6
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gary Ln and Seneca Dr **$26,000.00**

NE Under Construction

238 Existing Curb Ramp

- *As-Built Description:*

At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
35

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

240 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.7
Right Flare	(%)	3.8
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Under Construction

239 Existing Curb Ramp

- *As-Built Description:*

At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B*-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
35

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gary Ln and Stadium Rd **$6,500.00**

Total Costs for Curb Ramps along : **Gary Ln** **$48,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	105	Gateway Dr	S Gateway Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

4424 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
138

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

4422 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 34.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	4.8
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.4
Right Flare	(%)	5.0
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.8	4.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

4423 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.6

Left Flare	(%)	1.7
Right Flare	(%)	7.1
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	5.0 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gateway Dr and S Gateway Dr **$21,000.00**

Total Costs for Curb Ramps along : Gateway Dr **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1603	Georgia Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3764 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W — Perpendicular

3763 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.8
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Georgia Ave and Lemon Ave **$10,000.00**

E Perpendicular

3766 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.2
Right Flare	(%)	7.0
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

3765 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.7
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3767 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Georgia Ave and Lime Ave **$13,250.00**

E Perpendicular

3734 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.7
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

3735 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 12.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.6
Right Flare	(%)	**12.1**
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3736 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Georgia Ave and Valencia Ave **$13,250.00**

Total Costs for Curb Ramps along : Georgia Ave **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	621	Georgia Ct	Valencia Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Perpendicular

3731 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.7
Right Flare	(%)	9.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE — Curb Ramp Required

3732 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3733 Detectable Warnings

- *As-Built Description:*

  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.6
Right Flare	(%)	9.9
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Georgia Ct and Valencia Ave **$12,000.00**

Total Costs for Curb Ramps along : Georgia Ct **$12,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	274	Gill Ave	Noble St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2767 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

2768 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Gill Ave and Noble St **$7,000.00**

Total Costs for Curb Ramps along : Gill Ave **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	671	Glenville Ave	Common Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2316 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	5.9
Right Flare	(%)	8.6
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2318 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2317 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.2
Right Flare	(%)	5.7
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Glenville Ave** ***and*** **Common Way** **$16,500.00**

Total Costs for Curb Ramps along : **Glenville Ave** **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1020	Gold St	Redwood Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

961 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

960 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

959 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Gold St *and* Redwood Dr** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

963 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

964 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

962 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Gold St** ***and*** **S Park Dr** **$0.00**

Total Costs for Curb Ramps along : **Gold St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	591	Golden State Dr	Almond Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

4419 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — Perpendicular

4421 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**10.9**
Right Flare	(%)	7.9
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6	2.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

4418 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.2**
Right Flare	(%)	10.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4420 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**11.5**
Right Flare	(%)	**15.3**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Golden State Dr and Almond Ave **$19,500.00**

NE No Sidewalk, Curb Ramp Not Required

4417 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

S No Sidewalk, Curb Ramp Not Required

4415 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

W No Sidewalk, Curb Ramp Not Required

4416 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Golden State Dr** ***and*** **Gary Ln** **$0.00**

Total Costs for Curb Ramps along : **Golden State Dr** **$19,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1476	Granada Dr	Apple Tree Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2691 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2690 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	**46.5**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.8
Right Flare	(%)	3.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.5	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2689 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.5"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	46.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	3.3
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.9
Right Flare	(%)	3.1
Gutter Slope	(%)	8.6
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	12.0

Street Grade (Left / Right)	(%)	0.6 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Granada Dr and Apple Tree Dr **$13,000.00**

E No Sidewalk, Curb Ramp Not Required

1646 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1648 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1647 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Granada Dr** ***and*** **Holiday Way** **$0.00**

NE Perpendicular

1906 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
29

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	133.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.9
Right Flare	(%)	**11.1**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.2 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1905 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
47

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	105.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	N/A
Right Flare	(%)	6.9
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 0.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

1904 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
117

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Granada Dr** ***and*** **Industrial Ave** **$17,250.00**

NE No Sidewalk, Curb Ramp Not Required

2568 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2569 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2567 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.5%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.8
Right Flare	(%)	8.6
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Granada Dr and Mitchell Ct **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

1650 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1652 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1649 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1651 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Granada Dr** ***and*** **National Ave** **$0.00**

E Curb Ramp Required

1879 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
117

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1880 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.9

Left Flare	(%)	7.9
Right Flare	(%)	6.7
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1881 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.4
Right Flare	(%)	8.0
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Granada Dr and Plumas Street **$20,500.00**

E No Sidewalk, Curb Ramp Not Required

1623 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1622 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1624 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Granada Dr** ***and*** **Sunnydale St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1735 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1734 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1732 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1733 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Granada Dr** ***and*** **Third St** **$0.00**

NE Perpendicular

1917 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**13.2**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1919 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
15

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	75.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.3
Right Flare	(%)	4.3
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

1918 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.5% Right: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
11

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	120.0	120.
Slope of the Ramp / Pad	(%)	6.9	2.9
X Slope of the Ramp / Pad	(%)	**2.5**	**2.7**
Top Landing Length	(in)	N/A	N/A
Top Landing Slope	(%)	N/A	N/A
Top Landing X Slope	(%)	N/A	N/A

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.7
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.7 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1920 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
20

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.5
Right Flare	(%)	**12.7**
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.9 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Granada Dr and W Almond Ave **$24,250.00**

Total Costs for Curb Ramps along : **Granada Dr** **$81,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	919	Grant Ave	Fresno St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

4129 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

4128 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4126 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4127 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Grant Ave** ***and*** **Fresno St** **$0.00**

NE Perpendicular

4131 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
76

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	10.0
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.3 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4132 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
78

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**12.5**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.9 2.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4130 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Grant Ave and N Lake St **$21,000.00**

E Curb Ramp Required

4120 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4119 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4121 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.3**
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	2.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Grant Ave and Tulare St **$14,000.00**

Total Costs for Curb Ramps along : Grant Ave **$35,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	13	Grapefruit Way	Georgia Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3750 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

3749 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.9
Right Flare	(%)	8.7
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3748 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	7.4
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Grapefruit Way and Georgia Ave **$13,000.00**

E Curb Ramp Required

3738 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Perpendicular

3737 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.5
Right Flare	(%)	4.8
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3739 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Grapefruit Way and Valencia Ave **$17,000.00**

Total Costs for Curb Ramps along : Grapefruit Way **$30,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	826	Green Way	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

1370 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW — No Sidewalk, Curb Ramp Not Required

1369 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1368 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Green Way** ***and*** **Austin Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1366 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1365 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1367 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1364 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Green Way** ***and*** **Dellavalle Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

4027 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4026 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4029 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4028 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Green Way and Fresno St **$0.00**

E Curb Ramp Required

4034 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Combination

4036 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 40.0" Right: 40.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
67

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**40.0**	**40.0**
Length of Ramp / Pad	(in)	133.0	125.0
Slope of the Ramp / Pad	(%)	6.3	**11.4**
X Slope of the Ramp / Pad	(%)	**3.3**	**3.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.7
Top Landing X Slope	(%)	**2.2**	0.2
Length of Combo. Ramp	(in)	53.0	
Combo. Ramp Slope	(%)	9.2	
Combo. Ramp X Slope	(%)	0.0	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	**2.6**	
Bottom Landing X Slope	(in)	1.2	
Left Flare	(%)	9.6	
Right Flare	(%)	9.1	
Gutter Slope	(%)	**11.1**	
Gutter XSlope	(%)	0.6	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.5	3.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Combination

4035 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 42.0" Right: 42.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
69

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**42.0**	**42.0**
Length of Ramp / Pad	(in)	129.0	129.0
Slope of the Ramp / Pad	(%)	7.1	7.8
X Slope of the Ramp / Pad	(%)	**2.2**	**7.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.2**	0.8
Top Landing X Slope	(%)	**2.5**	1.7
Length of Combo. Ramp	(in)	48.0	
Combo. Ramp Slope	(%)	**10.3**	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	55.0	
Bottom Landing Slope	(in)	1.9	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**11.9**	
Right Flare	(%)	**13.0**	
Gutter Slope	(%)	**10.8**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.8	2.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Green Way and Merced St **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

1340 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1343 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	5.1
Right Flare	(%)	3.9
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

1341 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1342 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Green Way** ***and*** **N D St** **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

1359 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1358 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1356 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1357 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Green Way and Nebraska Ave **$0.00**

Total Costs for Curb Ramps along : Green Way **$27,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1118	Greenwood Dr	Monocott Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1574 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**5.5**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.0
Right Flare	(%)	4.8
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1573 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	4.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.8
Right Flare	(%)	8.3
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1572 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Greenwood Dr and Monocott Dr **$16,750.00**

N Curb Ramp Required

1569 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1570 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%

- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	**36.0**
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	4.5
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1571 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.9
Right Flare	(%)	4.9
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Greenwood Dr** ***and*** **Sandlewood Dr** **$16,750.00**

Total Costs for Curb Ramps along : **Greenwood Dr** **$33,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1528	Grenache Ave	Chianti Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2553 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.5
Right Flare	(%)	4.0
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2554 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Grenache Ave and Chianti Ave **$13,500.00**

NW Curb Ramp Required

2549 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2548 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.0
Right Flare	(%)	6.1
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Grenache Ave and Gamay Ave **$10,250.00**

NE Perpendicular

2550 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	3.3
Right Flare	(%)	3.1
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2551 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.8
Right Flare	(%)	5.0
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **Curb Ramp Required**

2552 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Grenache Ave** ***and*** **Merlot Ave** **$16,750.00**

Total Costs for Curb Ramps along : **Grenache Ave** **$40,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	764	Hacienda St	Apple Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3475 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.9
Right Flare	(%)	4.4
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3472 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.9
Right Flare	(%)	8.5
Gutter Slope	(%)	**13.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3474 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.6

Left Flare	(%)	4.1
Right Flare	(%)	6.0
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3473 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.8**
Right Flare	(%)	4.0
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.0 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hacienda St and Apple Ct **$26,000.00**

NE Curb Ramp Required

3470 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3469 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.6
Right Flare	(%)	6.8
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3471 Detectable Warnings

- *As-Built Description:*
  Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.
- *Proposed Solution:*
  Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.3
Right Flare	(%)	8.8
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Hacienda St** ***and*** **La Quinta Way** **$16,000.00**

NE Curb Ramp Required

3483 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3481 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.2
Right Flare	(%)	8.1
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.4	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3482 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.8
Right Flare	(%)	3.2
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Hacienda St** ***and*** **Pomegranate St** **$20,000.00**

Total Costs for Curb Ramps along : **Hacienda St** **$62,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	645	Half Dome Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

348 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

350 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.5
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.0	
Right Flare	(%)	3.9	
Gutter Slope	(%)	**7.1**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

349 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.9
Right Flare	(%)	4.9
Gutter Slope	(%)	**13.1**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Half Dome Ct** ***and*** **Monterey St** **$20,000.00**

Total Costs for Curb Ramps along : **Half Dome Ct** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	794	Harrison Ct	Jefferson Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

729 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.2
Right Flare	(%)	7.9
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

728 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	8.2
Right Flare	(%)	7.5
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

727 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Harrison Ct and Jefferson Ave **$20,500.00**

Total Costs for Curb Ramps along : Harrison Ct **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1153	Harvard Ave	Jefferson Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

865 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

867 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 34.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.1
Right Flare	(%)	8.7
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

866 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	**7.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	8.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Harvard Ave *and* Jefferson Ave** **$20,500.00**

E Curb Ramp Required

862 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

864 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.1
Right Flare	(%)	6.8
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

863 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 41.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	**41.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	8.0
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Harvard Ave and Princeton Ave **$20,000.00**

Total Costs for Curb Ramps along : **Harvard Ave** **$40,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	110	Hawk Ln	Blue Sky Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2124 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

NW — No Sidewalk, Curb Ramp Not Required

2125 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

SE No Sidewalk, Curb Ramp Not Required

2127 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

SW No Sidewalk, Curb Ramp Not Required

2126 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

Total Costs for Curb Ramps at : **Hawk Ln** ***and*** **Blue Sky Ln** **$0.00**

E Driveway

2134 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hawk Ln and Eagle Dr **$0.00**

NE No Sidewalk, Curb Ramp Not Required

2120 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

NW No Sidewalk, Curb Ramp Not Required

2121 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

SE No Sidewalk, Curb Ramp Not Required

2123 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

SW No Sidewalk, Curb Ramp Not Required

2122 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Rolled

Total Costs for Curb Ramps at : Hawk Ln and Meadow Lark Way **$0.00**

E Curb Ramp Required

2114 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2116 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.5
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	2.9
Right Flare	(%)	8.8
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	**3.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	7.0	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2115 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	9.9
Right Flare	(%)	0.3
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**4.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	6.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hawk Ln and Merced St **$16,750.00**

Total Costs for Curb Ramps along : **Hawk Ln** **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1503	Hazel Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3761 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.5
Right Flare	(%)	7.5
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3760 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.6
Right Flare	(%)	4.8
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.3	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3762 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Hazel Ave and Lemon Ave **$5,500.00**

NE Perpendicular

3746 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
13

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.5
Right Flare	(%)	4.6
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

3747 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Hazel Ave and Raymond Thomas St **$2,500.00**

Total Costs for Curb Ramps along : Hazel Ave **$8,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1532	Hazelnut Dr	Cherry Tree Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2635 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
11

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.0
Right Flare	(%)	8.3
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	3.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2636 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hazelnut Dr and Cherry Tree Dr **$10,000.00**

Total Costs for Curb Ramps along : Hazelnut Dr **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	719	Helena Way	Concord Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

278 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	6.1
Right Flare	(%)	6.1
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

277 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.5
Right Flare	(%)	5.9
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

276 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Helena Way and Concord Ave **$13,500.00**

NE Perpendicular

274 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.9
Right Flare	(%)	7.0
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	Non-Compliant

Street Grade (Left / Right)	(%)	0.1 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

275 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.5

Left Flare	(%)	4.0
Right Flare	(%)	4.9
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

273 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Helena Way and Monterey St **$9,500.00**

E Curb Ramp Required

279 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

281 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.5
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.7**
Right Flare	(%)	9.2
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.0 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

280 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	62.5
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.3
Right Flare	(%)	7.7
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Helena Way and Seneca Dr **$20,000.00**

Total Costs for Curb Ramps along : **Helena Way** **$43,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1088	Hickory Ave	Chestnut Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Perpendicular

2939 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.4
Right Flare	(%)	5.9
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2938 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2937 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.0
Right Flare	(%)	4.7
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hickory Ave and Chestnut Ave **$16,500.00**

Total Costs for Curb Ramps along : Hickory Ave **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	249	Hillsboro Ave	Fairfield Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

2337 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.75"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
6

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	3.7
Right Flare	(%)	6.8
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2336 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	3.0
Right Flare	(%)	7.0
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2338 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.3
Right Flare	(%)	5.5
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2339 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
6

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.1
Right Flare	(%)	5.7
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.3 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hillsboro Ave *and* Fairfield Way **$18,000.00**

NW Perpendicular

2280 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.1
Right Flare	(%)	5.8
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2282 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2281 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.0
Right Flare	(%)	5.7
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hillsboro Ave and Fairway Ave **$16,750.00**

NW Curb Ramp Required

2276 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2275 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.1
Right Flare	(%)	3.5
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2274 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.1
Right Flare	(%)	**11.7**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Hillsboro Ave *and* Glade Ave** **$20,000.00**

NE Curb Ramp Required

2277 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2278 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	6.4
Right Flare	(%)	**10.3**
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2279 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.1
Right Flare	(%)	7.1
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hillsboro Ave and Glenville Ave **$16,500.00**

NE Perpendicular

2341 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
13

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	3.1
Right Flare	(%)	8.0
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2342 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.0
Right Flare	(%)	5.7
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2340 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hillsboro Ave *and* Hampton Dr **$6,250.00**

NE Curb Ramp Required

2283 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2284 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
9

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.6
Right Flare	(%)	4.9
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 2.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2285 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.0
Right Flare	(%)	3.8
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.5 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Hillsboro Ave and Mateo Way **$20,000.00**

Total Costs for Curb Ramps along : **Hillsboro Ave** **$97,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1427	Hilton St	Fourth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

591 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

590 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

592 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

593 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Hilton St** ***and*** **Fourth St** **$0.00**

N Curb Ramp Required

556 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

557 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

558 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Hilton St** ***and*** **National Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Hilton St** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1053	Holiday Ct	Valley Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1664 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**5.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.0
Right Flare	(%)	2.9
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1665 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	4.3
Top Landing Length	(in)	0.0
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.7
Right Flare	(%)	5.7
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.5
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

1663 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Holiday Ct and Valley Way **$14,000.00**

Total Costs for Curb Ramps along : Holiday Ct **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	329	Hollow Ave	N Westberry Blv

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2353 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.9
Right Flare	(%)	8.6
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2352 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.4
Right Flare	(%)	5.6
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Hollow Ave** ***and*** **N Westberry Blv** **$9,000.00**

NE Curb Ramp Required

2351 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2349 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	3.7
Right Flare	(%)	9.1
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2350 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	**3.8**

Left Flare	(%)	8.9
Right Flare	(%)	3.8
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Hollow Ave *and* Tiburon Way** **$20,000.00**

Total Costs for Curb Ramps along : **Hollow Ave** **$29,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	564	Hoover Ave	Coolidge St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1965 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1967 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.7
Right Flare	(%)	2.5
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1966 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	3.1
Right Flare	(%)	4.2
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hoover Ave *and* Coolidge St $16,500.00

NE Curb Ramp Required

1968 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1969 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	2.5
Right Flare	(%)	5.0
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Hoover Ave *and* Truman Dr** **$10,250.00**

***Total Costs for Curb Ramps along :* Hoover Ave** **$26,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	750	Howard Rd	Amerine Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

2701 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.5% Right: 3.5%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	53.0
Length of Ramp / Pad	(in)	108.0	135.0
Slope of the Ramp / Pad	(%)	7.3	6.3
X Slope of the Ramp / Pad	(%)	0.3	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.5
Top Landing X Slope	(%)	**2.5**	**3.5**

Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

2702 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* Right: 3.5%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
26

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	65.0
Length of Ramp / Pad	(in)	60.0	76.0
Slope of the Ramp / Pad	(%)	4.8	6.4
X Slope of the Ramp / Pad	(%)	1.6	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	**3.5**
Top Landing X Slope	(%)	0.2	0.4

Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2700 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**13.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.2**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.5	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Howard Rd and Amerine Ave **$13,500.00**

NE Perpendicular

1792 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.3**
Right Flare	(%)	7.3
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1793 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**11.3**
Right Flare	(%)	8.2
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1791 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Asilomar Dr **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

1751 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

1832 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1753 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1831 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1752 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1829 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	9.3
Right Flare	(%)	5.9
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1754 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1830 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.8
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Howard Rd and Autumn Rd $14,000.00

NE No Sidewalk, Curb Ramp Not Required

1768 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1771 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1769 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1770 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Berry Dr $0.00

NE Curb Ramp Required

2698 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2697 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.1
Right Flare	(%)	5.3
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Parallel

2699 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.2% Right: 3.4%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)	49.0	48.0
Length of Ramp / Pad	(in)	122.0	148.0
Slope of the Ramp / Pad	(%)	6.9	3.5
X Slope of the Ramp / Pad	(%)	**2.1**	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.4
Top Landing X Slope	(%)	**2.2**	**3.4**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**20.0**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Dwayer Ave **$17,000.00**

NE Perpendicular

2713 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.4
Right Flare	(%)	6.1
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**17.0**

Street Grade (Left / Right)	(%)	1.0 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2712 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.8
Right Flare	(%)	4.6
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**17.0**

Street Grade (Left / Right)	(%)	1.2 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2714 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	141.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	2.6
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**3.8**

Left Flare	(%)	5.7
Right Flare	(%)	**15.1**
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	Non-Compliant
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	0.1	2.8
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Combination

2715 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	59.0
Length of Ramp / Pad	(in)	N/A	**46.0**
Slope of the Ramp / Pad	(%)	N/A	6.3
X Slope of the Ramp / Pad	(%)	N/A	1.0
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	2.0
Top Landing X Slope	(%)	N/A	1.8

Length of Combo. Ramp	(in)	57.0
Combo. Ramp Slope	(%)	0.8
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	63.0
Bottom Landing Slope	(in)	0.7
Bottom Landing X Slope	(in)	0.4
Left Flare	(%)	9.3
Right Flare	(%)	**13.4**
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	**3.5**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.0	0.4
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Howard Rd and Fairview Ave **$23,250.00**

NE Perpendicular

1819 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.7
Right Flare	(%)	5.1
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1820 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	73.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.8
Right Flare	(%)	6.2
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

1822 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
33

		LEFT	RIGHT
Width of Ramp / Pad	(in)	75.0	51.0
Length of Ramp / Pad	(in)	88.0	79.0
Slope of the Ramp / Pad	(%)	5.7	5.0
X Slope of the Ramp / Pad	(%)	1.1	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.3
Top Landing X Slope	(%)	**2.2**	0.7

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 3.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1821 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	1.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	1.9
Right Flare	(%)	0.6
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	**4.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.8 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Granada Dr **$11,500.00**

E No Sidewalk, Curb Ramp Not Required

1806 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

1810 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1807 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1811 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1809 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1808 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Howard Rd** ***and*** **Hilton St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1814 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1812 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1813 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Krest St **$0.00**

S Driveway

1818 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Mainberry Dr **$0.00**

NE Perpendicular

2721 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.2
Right Flare	(%)	6.7
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.1
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

2720 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE Perpendicular

2722 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.8
Right Flare	(%)	7.0
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

2723 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Howard Rd and Pine St **$6,000.00**

NE No Sidewalk, Curb Ramp Not Required

1825 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1823 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
34

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 5.2%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.9

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**26.0**

Street Grade (Left / Right)	(%)	3.3	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

1824 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Point West $3,000.00

NE Parallel

2719 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	**47.0**
Length of Ramp / Pad	(in)	N/A	132.0
Slope of the Ramp / Pad	(%)	N/A	5.0
X Slope of the Ramp / Pad	(%)	N/A	1.3
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.9
Top Landing X Slope	(%)	N/A	1.3

Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(%)	**6.2**	
Bottom Landing X Slope	(%)	1.9	
Gutter Slope	(%)	**5.6**	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**8.0**	

Street Grade (Left / Right)	(%)	0.4	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2718 Clear Space

- *As-Built Description:*
  Beyond the curb line, a clear space of 48" x 48" min. is not provided within the width of the crosswalk and wholly outside the parallel vehicle travel lane.
- *Proposed Solution:*
  Repaint crosswalk to provide a clear space within the markings.

CBC 2019 **11B-406.5.9**
CBC 2007 **1127B.5.9.5**
ADAAG **4.7.9**
PROWAG **R304.5.5**

Unit Cost **$500.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	7.3
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2717 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	110.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.2
Right Flare	(%)	5.5
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2716 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.2
Right Flare	(%)	6.5
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	2.8	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Howard Rd *and* Rotan Ave **$16,500.00**

NE Perpendicular

1790 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.0

Left Flare	(%)	10.0
Right Flare	(%)	6.5
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1789 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.8
Right Flare	(%)	5.7
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1788 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Santa Lucia Dr **$14,000.00**

NE Curb Ramp Required

1730 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1729 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1731 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd *and* Sassafras Dr **$7,000.00**

NE Perpendicular

2703 Ramp Slope

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.4**
Right Flare	(%)	**15.0**
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	2.3
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2704 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.9
Right Flare	(%)	2.6
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4 1.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2706 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.5
Right Flare	(%)	7.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.9 2.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2705 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	8.0
Right Flare	(%)	4.8
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.4 1.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd *and* Schnoor Ave **$19,250.00**

NE No Sidewalk, Curb Ramp Not Required

1816 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1815 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Island-Cut Through

1817 Compliant Curb Ramp

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	120.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	0.1

Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Shannon Ave **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1756 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1755 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1757 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1758 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Howard Rd** ***and*** **Spring Ave** **$0.00**

NE Pedestrian Pad

1839 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
27

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 11.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	68.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	1.0
X Slope of the Ramp / Pad	(%)	1.9

Gutter Slope	(%)	0.4
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Pedestrian Pad

1842 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
27

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	1.4
X Slope of the Ramp / Pad	(%)	0.7

Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.3 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Pedestrian Pad

1840 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
19

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 11.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	2.8
X Slope of the Ramp / Pad	(%)	0.9

Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Pedestrian Pad

1841 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
19

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	1.5
X Slope of the Ramp / Pad	(%)	0.5

Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.7 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Howard Rd and Westberry Bvd **$2,000.00**

ESE Perpendicular

2709 Ramp Transition

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

• *As-Built Description:*
Flush transition from ramp to gutter not provided.

• *As-is* 0.25"

• *Proposed Solution:*
Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.5
Right Flare	(%)	8.1
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**18.0**

Street Grade (Left / Right)	(%)	0.5	3.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NE Parallel

2710 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
49

• *As-Built Description:*
Cross slope of existing parallel curb ramp exceeds 2%.

• *As-is* Left: 2.4%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	48.0
Length of Ramp / Pad	(in)	99.0	117.0
Slope of the Ramp / Pad	(%)	6.7	7.2
X Slope of the Ramp / Pad	(%)	**2.4**	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	1.2
Top Landing X Slope	(%)	**3.4**	**3.7**

Bottom Landing Length	(in)	145.0
Bottom Landing Slope	(%)	1.8
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	Non-Compliant
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.8	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2711 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 5.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.3**
Right Flare	(%)	8.2
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SSE Parallel

2708 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	N/A
Length of Ramp / Pad	(in)	121.0	N/A
Slope of the Ramp / Pad	(%)	1.7	N/A
X Slope of the Ramp / Pad	(%)	0.1	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.3	N/A
Top Landing X Slope	(%)	1.1	N/A

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	2.0
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **Parallel**

2707 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority

42

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	62.0
Length of Ramp / Pad	(in)	N/A	159.0
Slope of the Ramp / Pad	(%)	N/A	1.2
X Slope of the Ramp / Pad	(%)	N/A	0.4
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	**2.2**
Top Landing X Slope	(%)	N/A	1.3

Bottom Landing Length	(in)	60.0	
Bottom Landing Slope	(%)	0.9	
Bottom Landing X Slope	(%)	1.3	
Gutter Slope	(%)	1.4	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**16.0**	

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Howard Rd** ***and*** **Williams Ave** **$26,750.00**

Total Costs for Curb Ramps along : **Howard Rd** **$187,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1261	Hull Ave	A St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Parallel

3420 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.4% Right: 3.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	66.0
Length of Ramp / Pad	(in)	99.0	98.0
Slope of the Ramp / Pad	(%)	6.3	5.5
X Slope of the Ramp / Pad	(%)	**3.4**	**3.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.5
Top Landing X Slope	(%)	**3.2**	**3.6**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.1
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

3423 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.0% Right: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.0
Length of Ramp / Pad	(in)	95.0	94.0
Slope of the Ramp / Pad	(%)	7.0	7.1
X Slope of the Ramp / Pad	(%)	**3.0**	**2.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.5
Top Landing X Slope	(%)	**3.9**	**3.9**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	2.0
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

3421 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 4.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.0
Length of Ramp / Pad	(in)	**44.0**	63.0
Slope of the Ramp / Pad	(%)	6.3	5.8
X Slope of the Ramp / Pad	(%)	0.2	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	0.7
Top Landing X Slope	(%)	1.3	**4.1**

Bottom Landing Length	(in)	**35.0**
Bottom Landing Slope	(%)	**3.9**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

3422 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3% Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	67.0
Length of Ramp / Pad	(in)	103.0	81.0
Slope of the Ramp / Pad	(%)	5.5	7.3
X Slope of the Ramp / Pad	(%)	1.8	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.6
Top Landing X Slope	(%)	**2.3**	**3.3**

Bottom Landing Length	(in)	51.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hull Ave *and* A St **$21,000.00**

NW Perpendicular

3362 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.1
Right Flare	(%)	4.5
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3361 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3360 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.5
Right Flare	(%)	8.7
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hull Ave and Lake St **$20,000.00**

NE Curb Ramp Required

3331 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3330 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.0
Right Flare	(%)	3.2
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3332 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
72

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.0
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Hull Ave and Sunrise Ave **$16,750.00**

Total Costs for Curb Ramps along : Hull Ave **$57,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	701	Imperial Dr	University Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

703 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.2
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Curb Ramp Required

702 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Imperial Dr ***and*** University Ave **$14,000.00**

Total Costs for Curb Ramps along : Imperial Dr **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1548**	**Independence Dr**	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Parallel

2810 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 8.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	74.0	71.0
Length of Ramp / Pad	(in)	119.0	184.0
Slope of the Ramp / Pad	(%)	3.1	2.6
X Slope of the Ramp / Pad	(%)	0.1	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	1.3
Top Landing X Slope	(%)	1.8	1.7

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

2811 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 7.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	72.0	71.0
Length of Ramp / Pad	(in)	158.0	216.0
Slope of the Ramp / Pad	(%)	1.9	3.8
X Slope of the Ramp / Pad	(%)	0.4	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	1.2
Top Landing X Slope	(%)	0.1	0.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**7.0**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2812 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Independence Dr and **$8,000.00**

Total Costs for Curb Ramps along : Independence Dr **$8,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	318	Independence Drive	Pine St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2808 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.4
Right Flare	(%)	9.8
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNW Perpendicular

2807 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2809 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.3
Right Flare	(%)	5.2
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSW Perpendicular

2805 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
28

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.0
Right Flare	(%)	5.3
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7	2.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

WNW Perpendicular

2806 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.4
Right Flare	(%)	7.3
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

WSW Perpendicular

2804 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.0
Right Flare	(%)	3.3
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.8 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Independence Drive *and* Pine St** **$13,250.00**

NW Curb Ramp Required

2815 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2813 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	126.0
Slope of the Ramp / Pad	(%)	3.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.0
Right Flare	(%)	5.1
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2814 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.
- *Notes:* Large weed growing where BL meets gutter

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	109.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.9
Right Flare	(%)	7.7
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Independence Drive and Victory Lane **$10,500.00**

Total Costs for Curb Ramps along : **Independence Drive** **$23,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	121	Indigo Dr	Sepia Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Parallel**

4434 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
9

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	83.0	84.0
Slope of the Ramp / Pad	(%)	6.3	6.7
X Slope of the Ramp / Pad	(%)	**2.8**	0.7
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	1.1
Top Landing X Slope	(%)	N/A	0.7

Bottom Landing Length	(in)	61.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.9	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

4436 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
27

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.5
Right Flare	(%)	8.9
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	3.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4435 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.4
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.8	2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Indigo Dr and Sepia Ct **$21,000.00**

Total Costs for Curb Ramps along : **Indigo Dr** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	891	Industrial Ave	Commerce Dr

N — No Sidewalk, Curb Ramp Not Required

1909 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1908 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**13.7**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **Under Construction**

1907 Existing Curb Ramp

- *As-Built Description:*

  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Industrial Ave** ***and*** **Commerce Dr** **$7,000.00**

Total Costs for Curb Ramps along : **Industrial Ave** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1260	Ironwood Way	Foxglove Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — No Sidewalk, Curb Ramp Not Required

2425 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
12

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2427 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.7
Right Flare	(%)	8.4
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2426 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**14.0**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	**10.7**
Right Flare	(%)	5.1
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Ironwood Way** ***and*** **Foxglove Way** **$13,000.00**

Total Costs for Curb Ramps along : **Ironwood Way** **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	182	Ivy Glen Dr	Bolinas Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2785 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.7
Right Flare	(%)	4.0
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2787 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.4
Right Flare	(%)	6.0
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2786 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ivy Glen Dr** ***and*** **Bolinas Way** **$16,000.00**

NE Perpendicular

2782 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.3
Right Flare	(%)	5.3
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2783 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.6
Right Flare	(%)	5.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

2784 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ivy Glen Dr** ***and*** **Diamante Ln** **$16,500.00**

Total Costs for Curb Ramps along : **Ivy Glen Dr** **$32,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	731	James Way	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3965 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

3961 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 33.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	**33.0**
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**4.0**
Top Landing Length	(in)	67.0
Top Landing Slope	(%)	**9.6**
Top Landing X Slope	(%)	**4.8**

Left Flare	(%)	**10.2**
Right Flare	(%)	6.5
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1. 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3964 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	**43.0**
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.1
Right Flare	(%)	7.0
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	**3.7**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3963 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	**40.0**
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.6
Right Flare	(%)	8.3
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 2.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3966 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3962 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : James Way and Austin Ave **$34,500.00**

N Curb Ramp Required

3972 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3970 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3971 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : James Way *and* Dellavalle Ave **$7,000.00**

NE Perpendicular

3978 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

• *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 0.0"

• *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.4
Right Flare	(%)	2.6
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3976 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	69.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.1**
Right Flare	(%)	8.0
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	4.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3977 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : James Way and N D St **$20,500.00**

N Curb Ramp Required

3975 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3973 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

3974 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **James Way** ***and*** **Nebraska Ave** **$7,000.00**

Total Costs for Curb Ramps along : **James Way** **$69,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1126	Jefferson Ave	Arthur Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

726 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.5
Right Flare	(%)	8.6
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

725 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.2
Right Flare	(%)	8.5
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

724 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jefferson Ave and Arthur Ct **$20,000.00**

NE Perpendicular

843 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
39

• *As-Built Description:*
Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

• *Proposed Solution:*
Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.8
Right Flare	(%)	6.7
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

844 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 2.9%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.3
Right Flare	(%)	8.7
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

842 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jefferson Ave and Central Pl $12,750.00

NE Perpendicular

732 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.3
Right Flare	(%)	6.6
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

731 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.0
Right Flare	(%)	7.3
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

730 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jefferson Ave and Jackson Ct **$16,750.00**

NE Perpendicular

734 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.2
Right Flare	(%)	5.3
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

733 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.4
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

735 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.3
Right Flare	(%)	8.2
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

736 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.0
Right Flare	(%)	4.5
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jefferson Ave and Orchard Ave **$26,500.00**

N Curb Ramp Required

845 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

846 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.1.
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.2
Right Flare	(%)	8.5
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

847 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.1**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jefferson Ave and Williams Ave **$20,500.00**

Total Costs for Curb Ramps along : Jefferson Ave **$96,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1265	Jennings St	Fairview Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

472 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

471 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

469 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

470 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Jennings St** ***and*** **Fairview Ave** **$0.00**

E Driveway

462 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

464 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
45

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

463 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
45

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Jennings St and Pine St **$0.00**

NE No Sidewalk, Curb Ramp Not Required

468 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

467 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

465 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

466 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jennings St and Rotan Ave **$0.00**

NE No Sidewalk, Curb Ramp Not Required

596 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

595 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

594 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Jennings St** ***and*** **Schnoor Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

476 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

475 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

473 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

474 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Jennings St** ***and*** **Willis Ave** **$0.00**

Total Costs for Curb Ramps along : **Jennings St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1069	Jonathan Way	Stephanie Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2496 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.8
Right Flare	(%)	6.8
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2494 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
42

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.5
Right Flare	(%)	6.8
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

2495 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Jonathan Way and Stephanie Ln **$3,000.00**

Total Costs for Curb Ramps along : Jonathan Way **$3,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	106	Joseph Ln	Sonora St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3921 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3922 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 6.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	67.0
Top Landing Slope	(%)	**6.7**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.6
Right Flare	(%)	**11.1**
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3920 Ramp Flare

- *As-Built Description:*

  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 14.7% Right: 11.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**14.7**
Right Flare	(%)	**11.1**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Joseph Ln and Sonora St **$13,500.00**

Total Costs for Curb Ramps along : Joseph Ln **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	590	Josephine Ct	Jericho Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2048 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2050 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 11.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.3
Right Flare	(%)	2.9
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2049 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.3
Right Flare	(%)	6.6
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Josephine Ct and Jericho Dr **$16,500.00**

Total Costs for Curb Ramps along : Josephine Ct **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1143	Joy St	Riverview Dr

N — No Sidewalk, Curb Ramp Not Required

891 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

889 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

890 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Joy St and Riverview Dr **$0.00**

Total Costs for Curb Ramps along : Joy St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1317	Judith Ct	Stephanie Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

2528 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2527 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.7
Right Flare	(%)	7.4
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2525 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**10.8**
Right Flare	(%)	4.9
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2526 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.2
Right Flare	(%)	9.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Judith Ct and Stephanie Ln **$22,500.00**

Total Costs for Curb Ramps along : Judith Ct **$22,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	947	Judith Way	Arbella Ln

NE — Curb Ramp Required

2506 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2507 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.4
Right Flare	(%)	5.0
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2508 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Judith Way and Arbella Ln **$16,500.00**

Total Costs for Curb Ramps along : Judith Way **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	614	Kathryn Ave	Anna Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2079 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	2.5
Right Flare	(%)	1.6
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2080 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	62.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	2.8
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2078 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kathryn Ave and Anna Ave **$13,250.00**

Total Costs for Curb Ramps along : Kathryn Ave **$13,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	791	Kent Dr	Cambria Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1613 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.5
Right Flare	(%)	8.1
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	3.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1614 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**12.4**
Right Flare	(%)	8.5
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1612 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kent Dr and Cambria Ave **$21,000.00**

NE Perpendicular

1617 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
13

• *As-Built Description:*
Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

• *Proposed Solution:*
Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.3
Right Flare	(%)	7.1
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1616 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 2.4%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**12.0**
Right Flare	(%)	9.6
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	N/A
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

1615 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kent Dr *and* Diane Way **$12,750.00**

NE Perpendicular

1697 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.6
Right Flare	(%)	9.0
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1698 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
18

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	44.0
Top Landing Slope	(%)	3.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	7.4
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	1.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1696 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kent Dr and Summer Ln **$21,000.00**

Total Costs for Curb Ramps along : Kent Dr **$54,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	334	Kimberley Ln	Alexis Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2950 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.3
Right Flare	(%)	5.8
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	1.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2948 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.0
Right Flare	(%)	4.8
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2949 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kimberley Ln and Alexis Way **$20,000.00**

NW Perpendicular

2951 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**3.1**

Left Flare	(%)	7.6
Right Flare	(%)	3.5
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	0.0	2.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2952 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kimberley Ln and Tevin Way **$13,500.00**

Total Costs for Curb Ramps along : Kimberley Ln **$33,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	511	Kimberly Dr	Deborah Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2394 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2395 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.7
Right Flare	(%)	7.5
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2396 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.4
Right Flare	(%)	4.5
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Kimberly Dr *and* Deborah Ln **$16,500.00**

NE Perpendicular

2397 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
27

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.9
Right Flare	(%)	6.3
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2400 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.7
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2398 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
17

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.1
Right Flare	(%)	4.9
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2399 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.8
Right Flare	(%)	4.6
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Kimberly Dr and Taylor Lane **$18,750.00**

Total Costs for Curb Ramps along : Kimberly Dr **$35,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1015	Kimmel Ave	Kent Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1553 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.9
Right Flare	(%)	7.7
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1552 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.4
Right Flare	(%)	5.5
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1551 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kimmel Ave and Kent Dr **$16,750.00**

NE Perpendicular

1533 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**12.3**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1532 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.8
Right Flare	(%)	9.6
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1534 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.9**
Right Flare	(%)	9.2
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1531 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	4.8
Right Flare	(%)	5.0
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kimmel Ave and Westberry Dr **$23,750.00**

NE Perpendicular

1542 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.1
Right Flare	(%)	6.5
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1543 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.5
Right Flare	(%)	8.1
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1541 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.7**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1544 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.0%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.3
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Kimmel Ave and Zak Way **$15,750.00**

Total Costs for Curb Ramps along : Kimmel Ave **$56,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	717	Kiwi St	E Almond Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

3525 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 3.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	3.2
Right Flare	(%)	8.8
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.2	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3524 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.5
Right Flare	(%)	6.3
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3526 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	7.2
Right Flare	(%)	3.0
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.5 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3523 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.8
Right Flare	(%)	6.2
Gutter Slope	(%)	11.8
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	13.0

Street Grade (Left / Right)	(%)	1.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Kiwi St and E Almond Ave $26,000.00

NE Curb Ramp Required

3532 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

3531 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	53.0
Length of Ramp / Pad	(in)	86.0	91.0
Slope of the Ramp / Pad	(%)	4.1	6.3
X Slope of the Ramp / Pad	(%)	0.6	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.1
Top Landing X Slope	(%)	1.9	1.8

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	1.8
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.6	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Kiwi St and Mandarin St **$14,000.00**

Total Costs for Curb Ramps along : Kiwi St **$40,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1206	Knox Ave	Carry Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3319 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
71

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.3
Right Flare	(%)	9.3
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3317 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.6
Right Flare	(%)	8.7
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3318 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox Ave and Carry Ave **$20,000.00**

NE Perpendicular

3316 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.2
Right Flare	(%)	**10.3**
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3314 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.8
Right Flare	(%)	5.6
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

3315 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Knox Ave** ***and*** **Lilly St** **$20,000.00**

Total Costs for Curb Ramps along : **Knox Ave** **$40,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	135	Knox Ct	A St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3413 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3411 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	7.3
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.6	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3412 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	63.5
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.2
Right Flare	(%)	**11.1**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox Ct and A St **$20,000.00**

Total Costs for Curb Ramps along : Knox Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	116	Knox St	Cherry St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3496 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3495 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	4.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.3

Left Flare	(%)	3.0
Right Flare	(%)	7.7
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3	1.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3494 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.9
Right Flare	(%)	5.0
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Cherry St $16,500.00

NE Perpendicular

3507 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.0
Right Flare	(%)	6.7
Gutter Slope	(%)	**13.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3508 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.6
Right Flare	(%)	6.8
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3509 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and E Almond Ave **$20,000.00**

NE Curb Ramp Required

3148 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3149 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.5
Right Flare	(%)	7.4
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3150 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.9
Right Flare	(%)	7.1
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.5 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Los Arcos Ln $20,000.00

NW Perpendicular

3504 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.2
Right Flare	(%)	7.3
Gutter Slope	(%)	**15.8**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.2 0.1
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

3506 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Parallel

3505 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 9.1%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)	82.0	57.0
Length of Ramp / Pad	(in)	62.0	65.0
Slope of the Ramp / Pad	(%)	**9.1**	6.0
X Slope of the Ramp / Pad	(%)	2.0	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**4.0**	1.6
Top Landing X Slope	(%)	0.6	**2.5**

Bottom Landing Length	(in)	**47.0**	
Bottom Landing Slope	(%)	1.2	
Bottom Landing X Slope	(%)	0.8	
Gutter Slope	(%)	**13.5**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	**11.0**	

Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Knox St and Nectarine St **$20,500.00**

NW Perpendicular

3105 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.3
Right Flare	(%)	6.7
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**3.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.5	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3107 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3106 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	9.9
Right Flare	(%)	2.4
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	**4.0**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Neplus Way **$20,000.00**

NE Perpendicular

3102 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	3.9
Right Flare	(%)	5.7
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.8 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3101 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.8
Right Flare	(%)	6.0
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3103 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.5
Right Flare	(%)	6.9
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3104 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St *and* Olive Ave — $12,500.00

NE Perpendicular

3126 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

• *As-Built Description:*
Clear width of ramp run is less than 48". (ADAAG requires 36" min)

• *As-is* 47.0"

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	8.6
Right Flare	(%)	5.1
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.5	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3127 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	2.9
Right Flare	(%)	5.9
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.3	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3128 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Ortega Dr **$20,000.00**

NE Perpendicular

3145 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.0
Right Flare	(%)	3.5
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

3146 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3147 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.3
Right Flare	(%)	6.8
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.9 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Ortega St $13,250.00

NE Perpendicular

3493 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.9
Right Flare	(%)	6.8
Gutter Slope	(%)	**12.4**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3491 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	1.5
Right Flare	(%)	5.9
Gutter Slope	(%)	11.5
Gutter XSlope	(%)	3.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	11.0

Street Grade (Left / Right)	(%)	2.8	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3492 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Knox St and Pomegranate St **$20,000.00**

Total Costs for Curb Ramps along : Knox St **$162,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1580	Koufax Dr	Drysdale Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3296 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S — Perpendicular

3295 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	4.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.3
Right Flare	(%)	3.1
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Koufax Dr and Drysdale Way **$10,000.00**

E Perpendicular

3297 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.8
Right Flare	(%)	1.9
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3298 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	9.6
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

3299 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Koufax Dr** ***and*** **Lilly St** **$13,000.00**

Total Costs for Curb Ramps along : **Koufax Dr** **$23,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1116	La Jolla Way	Briquel Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2069 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2070 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 3.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**3.7**

Left Flare	(%)	8.1
Right Flare	(%)	4.2
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	2.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2071 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.9
Right Flare	(%)	6.9
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **La Jolla Way** ***and*** **Briquel Ave** **$16,750.00**

NE Perpendicular

2067 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	68.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	**3.8**

Left Flare	(%)	9.4
Right Flare	(%)	4.2
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2068 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.5
Right Flare	(%)	8.2
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2066 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **La Jolla Way** ***and*** **Talise Ave** **$20,000.00**

NE Perpendicular

2058 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.4
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2059 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	5.2
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2057 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **La Jolla Way** ***and*** **Zapata St** **$16,500.00**

Total Costs for Curb Ramps along : **La Jolla Way** **$53,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1577	La Perla Ln	Las Fresas Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3171 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3170 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.6
Right Flare	(%)	6.2
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : La Perla Ln ***and*** Las Fresas Way **$13,500.00**

NE Perpendicular

3172 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.1
Right Flare	(%)	5.5
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3173 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
37

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.5
Right Flare	(%)	5.3
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

3174 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **La Perla Ln** ***and*** **Varbella Pk** **$16,500.00**

Total Costs for Curb Ramps along : **La Perla Ln** **$30,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1587	La Quinta Way	San Gabriel Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

3467 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.0
Right Flare	(%)	5.8
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3468 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : La Quinta Way and San Gabriel Dr **$10,000.00**

Total Costs for Curb Ramps along : La Quinta Way **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1520	Lacreta Ave	Amy Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2086 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	61.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.3
Right Flare	(%)	5.2
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2085 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
29

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2084 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lacreta Ave and Amy Ave **$13,500.00**

NE Perpendicular

2024 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**4.7**

Left Flare	(%)	7.3
Right Flare	(%)	2.6
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2023 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.0
Right Flare	(%)	2.6
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2022 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lacreta Ave** ***and*** **Dominguez Dr** **$20,000.00**

N Curb Ramp Required

2025 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2027 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.4
Right Flare	(%)	1.4
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2026 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
14

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	0.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	4.3
Right Flare	(%)	3.7
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lacreta Ave and Jericho Dr **$13,250.00**

N Curb Ramp Required

2087 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2089 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**10.2**
Right Flare	(%)	5.7
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	3.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2088 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.8

Left Flare	(%)	3.7
Right Flare	(%)	7.5
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lacreta Ave *and* Jesse Dr **$20,000.00**

NNW Perpendicular

2110 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.8
Right Flare	(%)	6.6
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2109 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**3.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	7.4
Right Flare	(%)	8.8
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2108 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	101.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**3.8**

Left Flare	(%)	7.4
Right Flare	(%)	5.0
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SSE Perpendicular

2107 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.4
Right Flare	(%)	4.5
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Lacreta Ave** ***and*** **Merced St** **$19,250.00**

Total Costs for Curb Ramps along : **Lacreta Ave** **$86,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	301	Laguna Way	Alicante Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2188 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
49

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.8
Right Flare	(%)	4.5
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2189 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.7
Right Flare	(%)	5.4
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2187 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Laguna Way and Alicante Way **$16,750.00**

NE Perpendicular

2191 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.4
Right Flare	(%)	6.0
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2192 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	75.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.1
Right Flare	(%)	6.4
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2190 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Laguna Way *and* Barcelona Way **$20,000.00**

NE Perpendicular

2182 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	8.1
Right Flare	(%)	3.6
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2183 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	62.5
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	6.3
Right Flare	(%)	9.5
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2181 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Laguna Way and San Sebastian Way **$13,500.00**

NE Perpendicular

2185 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	8.6
Right Flare	(%)	2.5
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2186 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	63.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.9
Right Flare	(%)	7.6
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **Curb Ramp Required**

2184 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Laguna Way** ***and*** **Toluca** **$16,750.00**

Total Costs for Curb Ramps along : **Laguna Way** **$67,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1456	Lake St	Lake St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3359 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.7
Right Flare	(%)	9.4
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3356 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.5**
Right Flare	(%)	**14.5**
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3358 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.4
Right Flare	(%)	6.2
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Parallel

3357 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.5	N/A
Length of Ramp / Pad	(in)	74.0	N/A
Slope of the Ramp / Pad	(%)	5.8	N/A
X Slope of the Ramp / Pad	(%)	**2.1**	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	1.6	N/A
Top Landing X Slope	(%)	**3.1**	N/A

Bottom Landing Length	(in)	95.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lake St and Lake St **$19,750.00**

Total Costs for Curb Ramps along : Lake St **$19,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1132	Lansing St	Shannon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

573 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

572 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

574 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lansing St *and* Shannon Ave **$0.00**

NE Perpendicular

1455 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.4%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.8
Right Flare	(%)	9.5
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1454 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 11.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**46.0**
Slope of the Ramp / Pad	(%)	0.3
X Slope of the Ramp / Pad	(%)	**11.2**
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.2**
Right Flare	(%)	8.4
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1456 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1453 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**46.0**
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.5**
Right Flare	(%)	9.6
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lansing St and Westberry Bvd **$26,000.00**

Total Costs for Curb Ramps along : Lansing St **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	359	Larrete Ave	Fairfield Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2360 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.3
Right Flare	(%)	6.3
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2358 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.2
Right Flare	(%)	6.4
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2359 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Larrete Ave and Fairfield Way **$16,000.00**

NW Curb Ramp Required

2296 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2294 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.7
Right Flare	(%)	8.1
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2295 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.6
Right Flare	(%)	9.4
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	**3.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Larrete Ave** ***and*** **Fairway Ave** **$16,000.00**

Total Costs for Curb Ramps along : **Larrete Ave** **$32,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	696	Las Fresas Way	Las Casas Ln

NE — Curb Ramp Required

3169 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3168 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.9
Right Flare	(%)	8.8
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3167 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.9
Right Flare	(%)	10.0
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Las Fresas Way** ***and*** **Las Casas Ln** **$20,000.00**

Total Costs for Curb Ramps along : **Las Fresas Way** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	139	Laurel St	Sunset Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1678 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.1
Right Flare	(%)	**13.9**
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	1.7	3.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1677 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
38

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.3
Right Flare	(%)	8.1
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.3	2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1676 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
131

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Laurel St and Sunset Ave **$20,500.00**

Total Costs for Curb Ramps along : Laurel St **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1467	Lemon Ave	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3772 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3771 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.2
Right Flare	(%)	6.7
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

3773 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lemon Ave and **$13,000.00**

Total Costs for Curb Ramps along : Lemon Ave **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1533	Lemon Tree Dr	Pear Tree Dr

NW — Perpendicular

2652 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.5
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2653 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lemon Tree Dr** ***and*** **Pear Tree Dr** **$10,250.00**

NW Curb Ramp Required

2655 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
105

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2656 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.7
Right Flare	(%)	2.7
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2654 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
6

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.3
Right Flare	(%)	6.2
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Lemon Tree Dr** ***and*** **W Almond Ave** **$12,750.00**

Total Costs for Curb Ramps along : **Lemon Tree Dr** **$23,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1040	Liberty Ln	State St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1390 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**11.1**
Right Flare	(%)	10.0
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

1391 Ramp Slope

- *As-Built Description:*
  Running slope of existing combination ramp run is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
14

		LEFT	RIGHT
Width of Ramp / Pad	(in)	88.0	88.0
Length of Ramp / Pad	(in)	60.0	60.0
Slope of the Ramp / Pad	(%)	2.2	3.0
X Slope of the Ramp / Pad	(%)	0.8	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.3
Top Landing X Slope	(%)	1.5	2.0
Length of Combo. Ramp	(in)	75.0	
Combo. Ramp Slope	(%)	8.5	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	50.0	
Bottom Landing Slope	(in)	0.7	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	**12.1**	
Right Flare	(%)	**10.6**	
Gutter Slope	(%)	**13.5**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.8	
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1392 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	60.0	
Length of Ramp / Pad	(in)	74.0	
Slope of the Ramp / Pad	(%)	**8.8**	
X Slope of the Ramp / Pad	(%)	**2.5**	
Top Landing Length	(in)	48.0	
Top Landing Slope	(%)	1.8	
Top Landing X Slope	(%)	0.5	
Left Flare	(%)	**11.7**	
Right Flare	(%)	**10.4**	
Gutter Slope	(%)	1.1	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	0.6	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Liberty Ln** ***and*** **State St** **$20,000.00**

Total Costs for Curb Ramps along : **Liberty Ln** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	288	Lighthouse Dr	Harbor Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

677 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

678 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.3
Right Flare	(%)	8.9
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

679 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.7**
Right Flare	(%)	8.1
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lighthouse Dr *and* Harbor Dr **$21,000.00**

NE Perpendicular

648 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.6
Right Flare	(%)	8.4
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

646 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	**11.8**
Right Flare	(%)	8.7
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

647 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lighthouse Dr** ***and*** **Mainberry Dr** **$21,000.00**

Total Costs for Curb Ramps along : **Lighthouse Dr** **$42,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1006	Lillian St	Riverview Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

888 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Curb Ramp Required

886 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

887 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lillian St** ***and*** **Riverview Dr** **$7,000.00**

Total Costs for Curb Ramps along : **Lillian St** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1581	Lilly St	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3313 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
67

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.6
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	0.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3312 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	**NO**
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lilly St and **$9,500.00**

NE Curb Ramp Required

3310 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3309 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.8
Right Flare	(%)	8.2
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.1
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3311 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.0
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lilly St and Carry Ave **$20,000.00**

E No Sidewalk, Curb Ramp Not Required

3262 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

3263 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3261 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lilly St and Cross St **$0.00**

E Perpendicular

3301 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 5.6%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.6
Right Flare	(%)	5.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3300 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.6

Left Flare	(%)	2.9
Right Flare	(%)	5.4
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

3302 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
139

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lilly St** ***and*** **Koufax Dr** **$13,000.00**

E Perpendicular

3365 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.0**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

3364 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
37

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.0

Left Flare	(%)	6.9
Right Flare	(%)	4.3
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3366 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	5.4
Right Flare	(%)	4.3
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3363 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
39

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.8
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lilly St and Sawmill St **$19,000.00**

NE Perpendicular

3306 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
84

Width of Ramp / Pad	(in)	77.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.9
Right Flare	(%)	8.5
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3307 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.1**
Right Flare	(%)	**13.9**
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3308 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Lilly St** ***and*** **Sunrise Ave** **$16,500.00**

Total Costs for Curb Ramps along : **Lilly St** **$78,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	407	Lime Ave	Georgia Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3753 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — Perpendicular

3752 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.2
Right Flare	(%)	6.0
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3751 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.7
Right Flare	(%)	7.8
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lime Ave *and* Georgia Ave **$16,750.00**

NE Perpendicular

3756 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.0
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3754 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.4
Right Flare	(%)	5.1
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3755 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lime Ave and Mango Ave **$13,000.00**

N Curb Ramp Required

3769 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3770 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	3.8
Right Flare	(%)	5.4
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	2.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3768 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.9

Left Flare	(%)	3.4
Right Flare	(%)	8.5
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8	2.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Lime Ave *and* San Bruno Ave** **$12,500.00**

***Total Costs for Curb Ramps along :* Lime Ave** **$42,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	806	Loma Linda Ln	Corona Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3446 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3445 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.2
Right Flare	(%)	4.3
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3444 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
42

• *As-Built Description:*
Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.

• *Proposed Solution:*
Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.0
Right Flare	(%)	9.9
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Loma Linda Ln *and* Corona Dr **$16,000.00**

NE Curb Ramp Required

3443 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3442 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.0
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3441 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 12.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.5
Right Flare	(%)	7.4
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Loma Linda Ln** ***and*** **Rancho Santa Fe Dr** **$16,500.00**

Total Costs for Curb Ramps along : **Loma Linda Ln** **$32,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	219	Los Arcos Ln	Las Fresas Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3164 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**13.7**
Right Flare	(%)	**11.0**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3165 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.4**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3166 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Los Arcos Ln** ***and*** **Las Fresas Way** **$13,000.00**

NE Perpendicular

3178 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.0
Right Flare	(%)	3.7
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3179 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Los Arcos Ln** ***and*** **Varbella Pk** **$10,250.00**

Total Costs for Curb Ramps along : **Los Arcos Ln** **$23,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1568	Los Cerritos Way	Ardilla Dr

NE — Perpendicular

3099 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.0
Right Flare	(%)	5.8
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.5	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW — Curb Ramp Required

3100 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Los Cerritos Way ***and*** Ardilla Dr **$13,500.00**

SE Perpendicular

3097 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.5
Right Flare	(%)	4.2
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3098 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Los Cerritos Way** ***and*** **Oso Dr** **$10,250.00**

Total Costs for Curb Ramps along : **Los Cerritos Way** **$23,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	391	Lucia Way	Asti Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

3899 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.3
Right Flare	(%)	**10.4**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3900 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.6**
Right Flare	(%)	10.0
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3898 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lucia Way and Asti Way **$20,000.00**

NE Perpendicular

3901 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.3
Right Flare	(%)	**12.7**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Curb Ramp Required

3902 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lucia Way and Gabriel Way **$13,500.00**

Total Costs for Curb Ramps along : Lucia Way **$33,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1555	Lynmarie Way	Kimberley Ln

NE — Perpendicular

2946 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Measurements		
Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**3.1**

Left Flare	(%)	4.2
Right Flare	(%)	8.7
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2947 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

Measurements		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lynmarie Way ***and*** Kimberley Ln **$13,500.00**

Total Costs for Curb Ramps along : Lynmarie Way **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	937	Lynn Way	Lucia Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3896 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3897 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.9
Right Flare	(%)	8.8
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3895 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.3**
Right Flare	(%)	6.3
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.1 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lynn Way and Lucia Way **$21,000.00**

NE Perpendicular

3891 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.8
Right Flare	(%)	9.5
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3890 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 27.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**27.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	10.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3889 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Lynn Way and Sonora St **$21,000.00**

Total Costs for Curb Ramps along : Lynn Way **$42,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1384	Lyons St	5Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

4193 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

4191 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

4192 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4194 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.3**
Right Flare	(%)	**17.9**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	2.6	4.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Lyons St and 5Th St **$7,000.00**

Total Costs for Curb Ramps along : Lyons St **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1557**	**Macadamia Ave**	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2958 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.8
Right Flare	(%)	4.6
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.8	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2957 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW Perpendicular

2956 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.2

Left Flare	(%)	3.8
Right Flare	(%)	5.7
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Macadamia Ave and $6,000.00

NW Curb Ramp Required

2961 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2959 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	3.6
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	2.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2960 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.1
Right Flare	(%)	4.8
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Macadamia Ave and Alexis Way **$13,250.00**

NW Curb Ramp Required

2941 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2942 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.7

Left Flare	(%)	4.3
Right Flare	(%)	7.6
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2940 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.1
Right Flare	(%)	7.3
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Macadamia Ave *and* Chestnut Ave **$12,500.00**

NW Curb Ramp Required

2944 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2945 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.5
Right Flare	(%)	4.3
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2943 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.8
Right Flare	(%)	4.8
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.9 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Macadamia Ave *and* Lynmarie Way** **$20,000.00**

NE Curb Ramp Required

2954 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2953 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	4.9
Right Flare	(%)	7.7
Gutter Slope	(%)	**12.4**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2955 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.4
Right Flare	(%)	3.8
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.5 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Macadamia Ave and Tevin Way **$20,000.00**

Total Costs for Curb Ramps along : Macadamia Ave **$71,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	868	Madera Ave	10Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

4234 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 16.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	3.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**16.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	3.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4233 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	3.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.6
Right Flare	(%)	4.3
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

4232 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Madera Ave** ***and*** **10Th St** **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

3575 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3573 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3574 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Madera Ave** ***and*** **De Santi Ave** **$7,000.00**

E Curb Ramp Required

17 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Parallel

16 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
42

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 5.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	71.0	71.0
Length of Ramp / Pad	(in)	55.0	70.0
Slope of the Ramp / Pad	(%)	5.7	5.9
X Slope of the Ramp / Pad	(%)	1.4	**5.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	**2.4**
Top Landing X Slope	(%)	0.5	**2.3**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	0.7
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE Parallel

3580 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
38

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	71.0	72.0
Length of Ramp / Pad	(in)	70.0	72.0
Slope of the Ramp / Pad	(%)	7.7	4.6
X Slope of the Ramp / Pad	(%)	0.0	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	1.6
Top Landing X Slope	(%)	1.5	**3.3**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.0	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

3581 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Parallel

18 Ramp Landing

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Right: 0.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)	70.0	70.0
Length of Ramp / Pad	(in)	70.0	93.0
Slope of the Ramp / Pad	(%)	2.5	4.8
X Slope of the Ramp / Pad	(%)	0.4	0.5
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	0.8	N/A
Top Landing X Slope	(%)	1.1	N/A

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE **No Sidewalk, Curb Ramp Not Required**

3579 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Madera Ave** ***and*** **Lewis St** **$28,000.00**

Total Costs for Curb Ramps along : **Madera Ave** **$49,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	479	Madison Dr	Hoover Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1960 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.1
Right Flare	(%)	2.3
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1961 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.3
Right Flare	(%)	3.9
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1959 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Madison Dr and Hoover Ave **$20,000.00**

E Curb Ramp Required

2039 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2040 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 39.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**39.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.1	
Right Flare	(%)	5.6	
Gutter Slope	(%)	**7.1**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.1	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2041 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	**38.5**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.7
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Madison Dr and Josephine Ct $20,000.00

E Curb Ramp Required

1957 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1956 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 3.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	**3.5**

Left Flare	(%)	3.1
Right Flare	(%)	6.1
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	**4.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1958 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	6.7
Right Flare	(%)	1.7
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Madison Dr and Lacreta Ave **$16,750.00**

Total Costs for Curb Ramps along : **Madison Dr** **$56,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1506	Madrid Ln	

NE — Curb Ramp Required

291 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

290 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.5
Right Flare	(%)	1.1
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Madrid Ln and **$10,250.00**

N Curb Ramp Required

292 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

293 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.3
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

294 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.1
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Madrid Ln and Seneca Ave **$16,750.00**

Total Costs for Curb Ramps along : Madrid Ln **$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1402	Magnolia St	6Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

3241 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

3242 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3240 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3243 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Magnolia St** ***and*** **6Th St** **$0.00**

E No Sidewalk, Curb Ramp Not Required

3237 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

3238 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3236 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3239 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Magnolia St** ***and*** **Cross St** **$0.00**

Total Costs for Curb Ramps along : **Magnolia St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	779	Mainberry Dr	Camden Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

661 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

662 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

660 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mainberry Dr *and* Camden Way **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1725 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1728 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1726 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1727 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Mainberry Dr** ***and*** **Howard Rd** **$0.00**

E No Sidewalk, Curb Ramp Not Required

1722 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

1716 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1724 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1717 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1723 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1718 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Mainberry Dr** ***and*** **Lansing St** **$0.00**

N Perpendicular

651 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
70

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	8.8
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

650 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.8
Right Flare	(%)	9.2
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

649 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
61

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**13.0**
X Slope of the Ramp / Pad	(%)	**4.5**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.3
Right Flare	(%)	8.8
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mainberry Dr and Lighthouse Ct **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

663 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

665 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

664 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

666 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Mainberry Dr** ***and*** **National Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1713 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1712 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1715 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1714 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Mainberry Dr *and* Third St** **$0.00**

***Total Costs for Curb Ramps along :* Mainberry Dr** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	901	Majestic Way	Gary Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2913 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.5
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	0.8	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2916 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**10.1**
Right Flare	(%)	5.3
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	0.1 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2914 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.6
Right Flare	(%)	8.1
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.8 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2915 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.2
Right Flare	(%)	7.9
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Majestic Way and Gary Ln **$15,000.00**

Total Costs for Curb Ramps along : Majestic Way **$15,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	557	Makenna Dr	Eagle Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1828 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.1
Right Flare	(%)	8.6
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1827 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.6
Right Flare	(%)	8.0
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	**3.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1826 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Makenna Dr and Eagle Way **$20,500.00**

NE Perpendicular

1891 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
12

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.3
Right Flare	(%)	7.6
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	**8.3**
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	6.6	6.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1892 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	3.2
Right Flare	(%)	5.2
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1894 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
29

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	6.1
Right Flare	(%)	8.0
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1893 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
31

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.5
Right Flare	(%)	8.4
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 2.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Makenna Dr and Maple St **$20,250.00**

NE Perpendicular

1835 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	**5.0**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**10.2**
Right Flare	(%)	6.7
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1833 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
9

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.5
Right Flare	(%)	8.1
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1834 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Makenna Dr** ***and*** **Oak St** **$21,000.00**

NW Curb Ramp Required

1889 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1890 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.8
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Makenna Dr and Plumas St **$13,500.00**

Total Costs for Curb Ramps along : Makenna Dr **$75,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	92	Malta Ave	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

4053 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1% Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	51.0	52.0
Length of Ramp / Pad	(in)	74.0	68.0
Slope of the Ramp / Pad	(%)	7.3	5.9
X Slope of the Ramp / Pad	(%)	**2.1**	**3.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.8
Top Landing X Slope	(%)	**2.1**	**3.1**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	**2.7**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4054 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.4% Right: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	73.0	71.0
Slope of the Ramp / Pad	(%)	5.2	8.0
X Slope of the Ramp / Pad	(%)	**2.4**	**2.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.5
Top Landing X Slope	(%)	**3.0**	**3.0**

Bottom Landing Length	(in)	52.0
Bottom Landing Slope	(%)	**2.7**
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

4052 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Malta Ave *and* E Cleveland Ave** **$21,000.00**

N No Sidewalk, Curb Ramp Not Required

2215 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2217 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2216 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Malta Ave** ***and*** **Mission Ave** **$0.00**

Total Costs for Curb Ramps along : **Malta Ave** **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	498	Mandana Way	Fairway Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2290 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2288 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.2
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2289 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.6
Right Flare	(%)	5.8
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Mandana Way *and* Fairway Ave** **$16,500.00**

NE Perpendicular

2286 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	3.7
Right Flare	(%)	4.2
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.7	0.2
Stop/Yield Control:	(y/n)		
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE **Curb Ramp Required**

2287 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Mandana Way** ***and*** **Mateo Way** **$13,500.00**

Total Costs for Curb Ramps along : **Mandana Way** **$30,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1468	Mango Ave	Lemon Ave

NW Perpendicular

3757 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
13

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.0
Right Flare	(%)	4.3
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3759 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3758 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	9.1
Right Flare	(%)	8.6
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mango Ave and Lemon Ave **$16,000.00**

NE Perpendicular

3743 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	0.7
X Slope of the Ramp / Pad	(%)	**4.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	**5.0**

Left Flare	(%)	4.5
Right Flare	(%)	4.7
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 .8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3744 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	4.5
Right Flare	(%)	7.5
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

3745 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Mango Ave and Raymond Thomas St **$9,750.00**

Total Costs for Curb Ramps along : Mango Ave **$25,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	418	Manresa Dr	Asilomar Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

1797 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.3**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1798 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.7
Right Flare	(%)	7.7
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1799 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Manresa Dr and Asilomar Dr **$21,000.00**

E Curb Ramp Required

1779 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1780 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
28

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.7**
Right Flare	(%)	6.5
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1781 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.2
Right Flare	(%)	6.9
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Manresa Dr and Santa Lucia Dr **$21,000.00**

Total Costs for Curb Ramps along : Manresa Dr **$42,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	83	Manzana Ct	Avila Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3198 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

3196 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.2
Right Flare	(%)	5.6
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3197 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	6.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Manzana Ct *and* Avila Way **$13,000.00**

E Perpendicular

3201 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.6
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

3199 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.7
Right Flare	(%)	8.3
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3200 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Manzana Ct and Clinton St **$13,000.00**

Total Costs for Curb Ramps along : Manzana Ct **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1274	Maple St	Cortopassi St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3556 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

3557 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3559 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3558 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Cortopassi St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

2745 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2744 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 11.3%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.2
Right Flare	(%)	6.3
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2746 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Maple St *and* Cypress St** **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

2755 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2754 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2753 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Grove St** **$0.00**

NW Curb Ramp Required

3585 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3587 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3586 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
41

Width of Ramp / Pad	(in)	94.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**12.2**
Right Flare	(%)	7.0
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Maple St *and* Madera Ave $10,000.00

NE No Sidewalk, Curb Ramp Not Required

383 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

384 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

385 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Maple Ct** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

365 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

366 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

364 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

367 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Monterey St** **$0.00**

NW No Sidewalk, Curb Ramp Not Required

2751 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2752 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2750 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Maple St *and* Noble St $0.00

NE Perpendicular

2741 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.8
Right Flare	(%)	6.0
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.2	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2742 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.9
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.6	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

2743 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Maple St and Pine St **$9,500.00**

NE No Sidewalk, Curb Ramp Not Required

381 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Parallel

382 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
45

• *As-Built Description:*
Cross slope at top landing of existing parallel curb ramp exceeds 2%.

• *As-is* Left: 2.4%

• *Proposed Solution:*
Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	70.0	77.0
Length of Ramp / Pad	(in)	63.0	80.0
Slope of the Ramp / Pad	(%)	5.9	7.0
X Slope of the Ramp / Pad	(%)	1.6	1.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.6
Top Landing X Slope	(%)	**2.4**	1.3

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.6	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

380 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

379 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Santa Clara** **$3,500.00**

NE No Sidewalk, Curb Ramp Not Required

376 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

377 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

375 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

378 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Maple St** ***and*** **Santa Cruz St** **$0.00**

NE Parallel

388 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	100.0	100.0
Length of Ramp / Pad	(in)	50.0	66.0
Slope of the Ramp / Pad	(%)	8.1	4.8
X Slope of the Ramp / Pad	(%)	0.1	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	0.5
Top Landing X Slope	(%)	1.9	0.7

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Parallel

387 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.6% Right: 3.1%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	100.0	101.0
Length of Ramp / Pad	(in)	73.0	57.0
Slope of the Ramp / Pad	(%)	4.6	7.0
X Slope of the Ramp / Pad	(%)	0.3	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	**2.8**
Top Landing X Slope	(%)	**2.6**	**3.1**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

389 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.8
Right Flare	(%)	4.1
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.3 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

386 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 3.1%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	81.0	81.0
Length of Ramp / Pad	(in)	81.0	87.0
Slope of the Ramp / Pad	(%)	5.3	5.6
X Slope of the Ramp / Pad	(%)	0.4	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.0	0.0
Top Landing X Slope	(%)	**3.1**	0.9

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.5
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Maple St and Stadium Rd **$13,000.00**

Total Costs for Curb Ramps along : **Maple St** **$42,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	508	Marie Dr	Glade Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2405 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.0
Right Flare	(%)	6.0
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2406 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
24

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.6
Right Flare	(%)	5.3
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2404 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Marie Dr and Glade Ave **$16,500.00**

NE Perpendicular

2401 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
17

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.0
Right Flare	(%)	3.0
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2402 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2403 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
17

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.0
Right Flare	(%)	3.5
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Marie Dr and Taylor Lane **$12,000.00**

Total Costs for Curb Ramps along : Marie Dr **$28,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	638	Marina Dr	Asilomar Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1803 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.1
Right Flare	(%)	**11.7**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1804 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
21

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.8
Right Flare	(%)	7.1
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1805 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Marina Dr and Asilomar Dr **$20,500.00**

Total Costs for Curb Ramps along : Marina Dr **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	132	Mariposa St	A St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Parallel			

3404 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority

62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	61.0
Length of Ramp / Pad	(in)	N/A	91.0
Slope of the Ramp / Pad	(%)	N/A	7.0
X Slope of the Ramp / Pad	(%)	N/A	0.6
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.3
Top Landing X Slope	(%)	N/A	0.8

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	0.0	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3402 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.2
Right Flare	(%)	6.8
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3403 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mariposa St and A St **$6,500.00**

NE Perpendicular

3400 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.7
Right Flare	(%)	3.4
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.8 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3401 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
146

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3399 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.9
Right Flare	(%)	6.7
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.7	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Mariposa St *and* Dome Ave **$13,000.00**

NE Perpendicular

3379 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.2
Right Flare	(%)	9.2
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3380 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.8
Right Flare	(%)	2.2
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3381 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mariposa St and Olive Ave **$13,250.00**

NE Curb Ramp Required

3440 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3439 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 12.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.6
Right Flare	(%)	4.3
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.3	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Mariposa St** ***and*** **Oso Dr** **$10,000.00**

Total Costs for Curb Ramps along : **Mariposa St** **$42,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1429	Martin St	Lewis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3547 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNW — Perpendicular

3546 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 17.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
81

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**17.2**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.4**
Right Flare	(%)	**13.9**
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3548 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3549 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

WNW Perpendicular

3545 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 18.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**18.5**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	**12.6**
Right Flare	(%)	**11.8**
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Martin St and Lewis St **$13,000.00**

Total Costs for Curb Ramps along : Martin St **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1462	Merced St	Adell St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

2148 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

2150 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.5
Right Flare	(%)	6.4
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	1.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2149 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.8
Right Flare	(%)	6.3
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merced St and Adell St **$13,000.00**

NE No Sidewalk, Curb Ramp Not Required

4081 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4080 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4082 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4083 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Merced St *and* Daulton Ave** **$0.00**

N Curb Ramp Required

4188 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Parallel

4184 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	72.0	77.0
Slope of the Ramp / Pad	(%)	8.0	7.4
X Slope of the Ramp / Pad	(%)	**2.3**	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.2
Top Landing X Slope	(%)	**2.3**	1.5

Bottom Landing Length	(in)	**45.0**
Bottom Landing Slope	(%)	0.0
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4182 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
68

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.9% Right: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	74.0	80.0
Slope of the Ramp / Pad	(%)	7.6	7.7
X Slope of the Ramp / Pad	(%)	**2.9**	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	1.5
Top Landing X Slope	(%)	**2.7**	**4.0**

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

4183 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

4190 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 4.0%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	50.0	50.0
Length of Ramp / Pad	(in)	80.0	78.0
Slope of the Ramp / Pad	(%)	7.9	**8.7**
X Slope of the Ramp / Pad	(%)	0.1	**4.0**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	0.2
Top Landing X Slope	(%)	**2.3**	1.4

Bottom Landing Length	(in)	**46.0**	
Bottom Landing Slope	(%)	0.9	
Bottom Landing X Slope	(%)	0.1	
Gutter Slope	(%)	**9.6**	
Gutter XSlope	(%)	1.4	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.1	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

4189 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 9.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	76.0	76.0
Slope of the Ramp / Pad	(%)	**9.4**	6.9
X Slope of the Ramp / Pad	(%)	0.7	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	0.5
Top Landing X Slope	(%)	**2.5**	**2.7**

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	1.5
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Merced St *and* E Cleveland Ave — $42,000.00

NE Perpendicular

4102 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.8
Right Flare	(%)	9.4
Gutter Slope	(%)	**13.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

4100 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4103 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.2
Right Flare	(%)	8.5
Gutter Slope	(%)	**13.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

4101 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merced St *and* E Lincoln Ave **$14,000.00**

NE Perpendicular

4086 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	1.9
X Slope of the Ramp / Pad	(%)	**8.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	9.8
Right Flare	(%)	7.1
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

4084 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
56

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 13.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.6
Right Flare	(%)	6.7
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

4085 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merced St and E Riverside Dr **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

4125 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4124 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

4122 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4123 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Merced St** ***and*** **Grant Ave** **$0.00**

E No Sidewalk, Curb Ramp Not Required

2254 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2255 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Combination

2256 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 33.0" Right: 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
71

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**33.0**	**35.0**
Length of Ramp / Pad	(in)	124.0	123.0
Slope of the Ramp / Pad	(%)	7.0	4.9
X Slope of the Ramp / Pad	(%)	0.1	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.9	2.3
Top Landing X Slope	(%)	**2.4**	1.8
Length of Combo. Ramp	(in)	51.0	
Combo. Ramp Slope	(%)	11.0	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	50.0	
Bottom Landing Slope	(in)	**3.5**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.1**	
Right Flare	(%)	6.7	
Gutter Slope	(%)	**12.1**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Merced St and W Sherwood Way **$7,000.00**

Total Costs for Curb Ramps along : Merced St **$90,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1223	Merlot Ave	Barbera Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

2559 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.2
Right Flare	(%)	7.3
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2558 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	4.5
Right Flare	(%)	7.1
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2560 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merlot Ave and Barbera Ave **$20,000.00**

NE Perpendicular

2557 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.6
Right Flare	(%)	6.5
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2556 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.4
Right Flare	(%)	5.4
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2555 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Merlot Ave** ***and*** **Chablis Ave** **$20,000.00**

E No Sidewalk, Curb Ramp Not Required

1922 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
13

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1921 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**14.3**
Right Flare	(%)	**13.2**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1923 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.3**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merlot Ave and Granada Dr **$13,000.00**

NE Perpendicular

2610 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
3

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.2
Right Flare	(%)	6.7
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2607 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.6
Right Flare	(%)	5.9
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2609 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
1

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.4
Right Flare	(%)	4.7
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2608 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.8
Right Flare	(%)	6.0
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Merlot Ave and S Timberline Dr **$26,000.00**

NE Curb Ramp Required

2612 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2611 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 13.5%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.8**
Right Flare	(%)	9.7
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2613 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
5

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	3.1
Top Landing X Slope	(%)	0.4

Left Flare	(%)	4.8
Right Flare	(%)	5.9
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Merlot Ave *and* S Wolftrap St **$16,750.00**

NE Perpendicular

2577 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	46.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	13.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.4
Right Flare	(%)	5.8
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.25
Truncated Domes	(y/n)	YES
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	0.6 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2578 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
10

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE Perpendicular

2576 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.9
Right Flare	(%)	4.8
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Merlot Ave and Westberry Bvd **$13,000.00**

Total Costs for Curb Ramps along : Merlot Ave **$108,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1461	Michoacan Ct	Jericho Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2042 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

2047 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
23

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.0**
Right Flare	(%)	8.9
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2046 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

- *Notes:* Relocate basketball hoop.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	71.5
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.6
Right Flare	(%)	8.5
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2045 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2044 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	48.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.1
Right Flare	(%)	3.5
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2043 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.8
Right Flare	(%)	8.6
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Michoacan Ct and Jericho Dr **$40,000.00**

Total Costs for Curb Ramps along : **Michoacan Ct** **$40,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	77	Milano Lane	Lucca Court

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

265 Compliant Curb Ramp

- *As-Built Description:*

  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.5
Slope of the Ramp / Pad	(%)	4.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.1
Right Flare	(%)	4.4
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

266 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	4.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.3

Left Flare	(%)	3.1
Right Flare	(%)	6.0
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.0	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

264 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Milano Lane and Lucca Court **$7,000.00**

E Curb Ramp Required

251 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

252 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.1
Right Flare	(%)	4.3
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

253 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.5
Right Flare	(%)	6.3
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Milano Lane *and* Monterey St **$8,000.00**

NE Perpendicular

268 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
30

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.4
Right Flare	(%)	4.7
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

269 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.7
Right Flare	(%)	7.3
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

267 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Milano Lane and Napoli St **$7,000.00**

E No Sidewalk, Curb Ramp Not Required

257 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Perpendicular

256 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.8
Right Flare	(%)	4.4
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

259 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	3.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.5
Right Flare	(%)	3.5
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

255 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.8%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.6
Right Flare	(%)	7.0
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Non-Compliant
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

258 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	3.5
Right Flare	(%)	8.8
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

254 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Milano Lane and Pompei St **$9,250.00**

NE Perpendicular

260 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	2.0

Left Flare	(%)	8.8
Right Flare	(%)	3.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

263 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	101.5
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	9.1
Right Flare	(%)	3.0
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

261 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	100.5
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.3
Right Flare	(%)	6.2
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

262 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	2.9
Right Flare	(%)	6.8
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Milano Lane and Roma Court **$9,500.00**

NE Perpendicular

271 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	110.5
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.3
Right Flare	(%)	8.3
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

272 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.5
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.2
Right Flare	(%)	8.3
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

270 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Milano Lane** ***and*** **Stadium Rd** **$3,250.00**

Total Costs for Curb Ramps along : **Milano Lane** **$44,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1575	Milow St	Fritz St

NW Perpendicular

3157 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.6

Left Flare	(%)	3.8
Right Flare	(%)	6.7
Gutter Slope	(%)	7.4
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	11.0

Street Grade (Left / Right)	(%)	2.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3158 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Milow St and Fritz St **$13,500.00**

Total Costs for Curb Ramps along : Milow St **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	599	Mission Ave	Kadota Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

2209 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

2211 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2210 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Mission Ave and Kadota Ave **$0.00**

Total Costs for Curb Ramps along : Mission Ave **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	195	Monarch Rd	Dome Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3397 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3396 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 10.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.4
Right Flare	(%)	2.8
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.6	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3398 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	3.8
Right Flare	(%)	8.4
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	**3.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.4 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monarch Rd and Dome Ave **$16,500.00**

Total Costs for Curb Ramps along : Monarch Rd **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	75	Monroe Ave	Eisenhower Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2034 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2035 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	**4.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**4.3**

Left Flare	(%)	**11.6**
Right Flare	(%)	4.6
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2036 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.1
Right Flare	(%)	7.3
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Monroe Ave *and* Eisenhower Ln — $16,750.00

N Curb Ramp Required

1962 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1964 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	4.8
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.6
Right Flare	(%)	0.7
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	**4.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1963 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	5.6
Right Flare	(%)	2.8
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Monroe Ave and Hoover Ave **$16,750.00**

NE Perpendicular

1935 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	**36.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.7
Right Flare	(%)	5.7
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1934 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 32.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	4.9
Right Flare	(%)	9.2
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1933 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monroe Ave *and* Pierce Ln **$20,000.00**

NE Perpendicular

1991 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.8
Right Flare	(%)	4.8
Gutter Slope	(%)	**14.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1992 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
12

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.9
Right Flare	(%)	1.9
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1990 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monroe Ave and Tyler Ln **$16,500.00**

Total Costs for Curb Ramps along : Monroe Ave **$70,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1047	Monterey Dr	Almond Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

340 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.6% Right: 2.2%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	75.0
Length of Ramp / Pad	(in)	113.0	134.0
Slope of the Ramp / Pad	(%)	5.3	2.1
X Slope of the Ramp / Pad	(%)	1.2	1.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.1
Top Landing X Slope	(%)	**2.6**	**2.2**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.3**
Bottom Landing X Slope	(%)	1.5
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

341 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	6.2
Right Flare	(%)	3.8
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

339 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	7.8
Right Flare	(%)	2.2
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

338 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**12.9**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**3.1**

Left Flare	(%)	7.4
Right Flare	(%)	9.7
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.2 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monterey Dr *and* Almond Ave **$23,000.00**

NE Perpendicular

299 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.3
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

300 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.2
Right Flare	(%)	8.5
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

298 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monterey Dr and Madrid Ln **$16,500.00**

NE Perpendicular

216 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**4.5**

Left Flare	(%)	6.6
Right Flare	(%)	2.6
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

217 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.6

Left Flare	(%)	6.6
Right Flare	(%)	4.0
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3 1.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

215 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**14.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.8
Right Flare	(%)	7.6
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.6 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

214 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	3.8
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.5 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monterey Dr and St Montelena Ct **$26,000.00**

Total Costs for Curb Ramps along : **Monterey Dr** **$65,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	325	Monterey St	Gary Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

301 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.8
Right Flare	(%)	9.7
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

302 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.5
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.4
Right Flare	(%)	4.7
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

304 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	2.6
Right Flare	(%)	8.1
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

303 Ramp Transition

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

Unit Cost **$2500.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	4.6
Right Flare	(%)	4.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Monterey St *and* Gary Ln **$22,000.00**

NE Perpendicular

3542 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$3250.00**

Priority
67

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.7
Right Flare	(%)	**11.2**
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3543 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3544 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
66

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 6.6%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.6**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	3.8
Right Flare	(%)	6.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Monterey St and Lewis St **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

361 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

362 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

360 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

363 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.1%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	4.6
Right Flare	(%)	5.8
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Monterey St and Walnut St **$6,500.00**

Total Costs for Curb Ramps along : Monterey St **$35,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1090	Moore Ave	S Lake St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4295 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.1
Right Flare	(%)	5.0
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	07 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4296 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.8
Right Flare	(%)	9.2
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4297 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
67

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.5
Right Flare	(%)	8.2
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4298 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.8
Right Flare	(%)	7.2
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Moore Ave and S Lake St $28,000.00

E No Sidewalk, Curb Ramp Not Required

3375 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3374 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3373 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Moore Ave and Vineyard Ave **$0.00**

Total Costs for Curb Ramps along : Moore Ave **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	640	Munras Ave	San Marco Ave

NE — Curb Ramp Required

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE 2841	Access Route	• *As-Built Description:* Curb ramp or blended transition not provided where a pedestrian access route crosses a curb. • *Proposed Solution:* Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.	*CBC 2007* **1127B.5.1** *ADAAG* **4.7.1** *PROWAG* **R207.1** Unit Cost **$7000.00** **Priority 130**	

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NW 2840	Ramp Slope	• *As-Built Description:* Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%. • *As-is* 8.6% • *Proposed Solution:* Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.	*CBC 2019* **11B-406.2.1** *CBC 2007* **1127B.5.3** *ADAAG* **4.7.2; 4.8.2** *ADA-2010* **405.2** *PROWAG* **R304.2.2** Unit Cost **$6500.00** **Priority 43**	

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.2
Right Flare	(%)	4.3
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.9	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2842 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.2
Right Flare	(%)	7.3
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Munras Ave and San Marco Ave **$20,000.00**

Total Costs for Curb Ramps along : Munras Ave **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1431	N A St	5Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4211 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
110

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	67.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**22.2**
Right Flare	(%)	**19.3**
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4210 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
96

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**12.7**
Right Flare	(%)	**14.6**
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4212 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**17.8**
Right Flare	(%)	8.4
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 4.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4498 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
97

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**5.1**

Left Flare	(%)	7.1
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N A St and 5Th St **$27,000.00**

Total Costs for Curb Ramps along : N A St **$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1276	N B St	3Rd St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4368 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.5**
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4369 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
28

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	2.0

Left Flare	(%)	8.3
Right Flare	(%)	9.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4371 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.6**
Right Flare	(%)	**12.9**
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4370 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
28

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.4
Right Flare	(%)	6.8
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N B St *and* 3Rd St — $14,000.00

E Perpendicular

4374 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.4
Right Flare	(%)	8.9
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4373 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.6
Right Flare	(%)	9.7
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.2	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4375 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
53

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.0
Right Flare	(%)	9.3
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.7	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4372 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.3
Right Flare	(%)	9.4
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N B St and St 4Th **$19,250.00**

Total Costs for Curb Ramps along : N B St **$33,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1443	N C St	3Rd St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

3852 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**6.7**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.9
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3851 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 17.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**17.2**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	57.0
Top Landing Slope	(%)	**5.9**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.5**
Right Flare	(%)	**13.5**
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

3853 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.3%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
43

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	60.0
Length of Ramp / Pad	(in)	94.0	114.0
Slope of the Ramp / Pad	(%)	4.7	5.3
X Slope of the Ramp / Pad	(%)	**2.3**	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**3.0**	0.9
Top Landing X Slope	(%)	**2.1**	1.8

Length of Combo. Ramp	(in)	88.0
Combo. Ramp Slope	(%)	**5.3**
Combo. Ramp X Slope	(%)	1.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	0.3
Bottom Landing X Slope	(in)	0.1
Left Flare	(%)	8.8
Right Flare	(%)	8.2
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	2.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W **Combination**

3850 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 47.0" Right: 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
43

		LEFT	RIGHT
Width of Ramp / Pad	(in)	47.0	47.0
Length of Ramp / Pad	(in)	140.0	187.0
Slope of the Ramp / Pad	(%)	8.0	7.9
X Slope of the Ramp / Pad	(%)	1.9	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	1.7
Top Landing X Slope	(%)	3.5	0.1
Length of Combo. Ramp	(in)	89.0	
Combo. Ramp Slope	(%)	6.4	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.5	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	8.1	
Right Flare	(%)	7.4	
Gutter Slope	(%)	1.0	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.5	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N C St and 3Rd St **$27,000.00**

Total Costs for Curb Ramps along : N C St **$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1381	N D St	1St St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Parallel

3833 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	54.0
Length of Ramp / Pad	(in)	104.0	131.0
Slope of the Ramp / Pad	(%)	5.8	7.3
X Slope of the Ramp / Pad	(%)	0.7	1.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.7
Top Landing X Slope	(%)	1.2	**2.1**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	2.2	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S — Curb Ramp Required

3832 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
138

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

3831 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.9**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N D St and 1St St **$17,000.00**

E Perpendicular

1066 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**11.4**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1067 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.3
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1065 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.7**
Right Flare	(%)	8.2
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1068 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**10.7**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	2.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N D St and 3Rd St $27,500.00

E Perpendicular

4474 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
95

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	0.3
X Slope of the Ramp / Pad	(%)	**8.2**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**6.8**
Top Landing X Slope	(%)	**9.5**

Left Flare	(%)	1.8
Right Flare	(%)	0.5
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	**8.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.4	6.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4473 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	0.7
X Slope of the Ramp / Pad	(%)	**7.4**
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	**8.0**

Left Flare	(%)	0.5
Right Flare	(%)	1.5
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	**9.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.3 7.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4475 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 5.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	0.4
X Slope of the Ramp / Pad	(%)	**5.3**
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	**5.3**
Top Landing X Slope	(%)	**4.0**

Left Flare	(%)	3.1
Right Flare	(%)	1.7
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	**5.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3 9.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Combination

4476 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 8.1% Right: 8.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
119

		LEFT	RIGHT
Width of Ramp / Pad	(in)	81.0	78.0
Length of Ramp / Pad	(in)	77.0	74.0
Slope of the Ramp / Pad	(%)	3.8	2.7
X Slope of the Ramp / Pad	(%)	**8.1**	**8.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**7.3**	7.9
Top Landing X Slope	(%)	1.0	**5.1**
Length of Combo. Ramp	(in)	64.0	
Combo. Ramp Slope	(%)	**15.6**	
Combo. Ramp X Slope	(%)	**7.5**	
Bottom Landing Length	(in)	49.0	
Bottom Landing Slope	(in)	**6.4**	
Bottom Landing X Slope	(in)	**5.5**	
Left Flare	(%)	0.3	
Right Flare	(%)	0.2	
Gutter Slope	(%)	3.0	
Gutter XSlope	(%)	**7.8**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.4	9.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N D St and 5Th St **$27,000.00**

NE Perpendicular

1310 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 12.8%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1
Left Flare	(%)	8.7
Right Flare	(%)	5.1
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0
Street Grade (Left / Right)	(%)	0.3 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1309 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
59

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.5
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1307 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.9
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SW Perpendicular

1308 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
63

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.8**
Right Flare	(%)	7.9
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N D St and E Lincoln Ave **$12,250.00**

NE Perpendicular

1305 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.4
Right Flare	(%)	4.6
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 4.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1304 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 8.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**8.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.9
Right Flare	(%)	6.9
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1306 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.9
Right Flare	(%)	3.9
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1303 Clear Space

- *As-Built Description:*

Beyond the curb line, a clear space of 48" x 48" min. is not provided within the width of the crosswalk and wholly outside the parallel vehicle travel lane.

- *Proposed Solution:*

Repaint crosswalk to provide a clear space within the markings.

CBC 2019 **11B-406.5.9**
CBC 2007 **1127B.5.9.5**
ADAAG **4.7.9**
PROWAG **R304.5.5**

Unit Cost **$500.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.1
Right Flare	(%)	4.2
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N D St and E S St **$13,000.00**

NE Perpendicular

1299 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.5
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.1
Right Flare	(%)	8.8
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1302 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.2
Right Flare	(%)	7.4
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.5	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1300 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
81

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.2**
Right Flare	(%)	**12.8**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.6	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1301 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	**13.2**
Right Flare	(%)	8.5
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N D St and Riverside Dr **$19,250.00**

Total Costs for Curb Ramps along : N D St **$116,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1390	N E St	3Rd St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

1064 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**14.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**18.0**
Right Flare	(%)	**17.1**
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1061 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
28

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.4
Right Flare	(%)	6.9
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1063 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Curb Ramp Required

1062 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N E St and 3Rd St $13,500.00

E Perpendicular

4479 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 8.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
95

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	3.3
X Slope of the Ramp / Pad	(%)	**8.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.6**
Top Landing X Slope	(%)	**6.5**

Left Flare	(%)	8.9
Right Flare	(%)	7.1
Gutter Slope	(%)	**19.6**
Gutter XSlope	(%)	**5.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.6	6.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

4477 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 32.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	119.0
Slope of the Ramp / Pad	(%)	1.6
X Slope of the Ramp / Pad	(%)	**7.6**
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**4.8**
Top Landing X Slope	(%)	**7.9**

Left Flare	(%)	4.0
Right Flare	(%)	4.4
Gutter Slope	(%)	**18.6**
Gutter XSlope	(%)	**7.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	6.6 7.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

4478 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
148

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N E St and 5Th St **$20,500.00**

Total Costs for Curb Ramps along : N E St **$34,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1207	N G St	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

1092 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	116.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**12.7**
Right Flare	(%)	**11.8**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1091 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	105.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	7.2
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.5	1.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

1093 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	118.0	120.0
Slope of the Ramp / Pad	(%)	3.4	2.6
X Slope of the Ramp / Pad	(%)	1.2	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	2.0
Top Landing X Slope	(%)	0.0	1.4

Length of Combo. Ramp	(in)	78.0
Combo. Ramp Slope	(%)	6.7
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(in)	1.5
Bottom Landing X Slope	(in)	0.1
Left Flare	(%)	9.7
Right Flare	(%)	8.7
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Combination

1094 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 8.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	93.0	81.0
Slope of the Ramp / Pad	(%)	6.3	**8.7**
X Slope of the Ramp / Pad	(%)	0.7	**2.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.8
Top Landing X Slope	(%)	0.2	1.6
Length of Combo. Ramp	(in)	65.0	
Combo. Ramp Slope	(%)	6.2	
Combo. Ramp X Slope	(%)	1.2	
Bottom Landing Length	(in)	59.0	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	1.2	
Left Flare	(%)	9.5	
Right Flare	(%)	**11.0**	
Gutter Slope	(%)	**6.9**	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.5	
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N G St and Fifth St $20,000.00

E Perpendicular

1082 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.7
Left Flare	(%)	9.2
Right Flare	(%)	7.7
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**
Street Grade (Left / Right)	(%)	0.3 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1081 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.1
Right Flare	(%)	7.6
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.8 0.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1083 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.9
Right Flare	(%)	6.7
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1084 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.0
Right Flare	(%)	6.4
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2 2.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N G St and W 4Th St **$24,000.00**

Total Costs for Curb Ramps along : N G St **$44,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1201	N Gateway Dr	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1099 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

1101 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 15.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
100

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	**45.0**
Slope of the Ramp / Pad	(%)	**15.6**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**16.1**
Right Flare	(%)	**16.7**
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

1100 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
102

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**13.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**17.2**
Right Flare	(%)	**16.6**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	2.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Gateway Dr *and* Fifth St **$13,000.00**

NE Curb Ramp Required

1042 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
138

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1043 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.3**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 3.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

1044 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.1
Right Flare	(%)	6.2
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.5 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Gateway Dr and W 1St St **$20,500.00**

NE Parallel

1039 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)	78.0	78.0
Length of Ramp / Pad	(in)	73.0	73.0
Slope of the Ramp / Pad	(%)	8.0	7.6
X Slope of the Ramp / Pad	(%)	2.0	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.2
Top Landing X Slope	(%)	1.4	1.8

Bottom Landing Length	(in)	83.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.2	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

1040 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.3**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8.	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

1041 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 16.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**16.3**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**20.5**
Right Flare	(%)	**19.4**
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 2.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Gateway Dr *and* W 2Nd St **$16,000.00**

E Perpendicular

1090 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 34.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	**34.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.0
Right Flare	(%)	8.6
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1089 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
100

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 32.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**4.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	**5.0**

Left Flare	(%)	**13.0**
Right Flare	(%)	7.5
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	**7.5**
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2 8.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1087 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
62

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	111.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**13.0**
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 6.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1088 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.6
Right Flare	(%)	**10.6**
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Gateway Dr and W 3Rd St $22,750.00

NE Curb Ramp Required

1045 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
138

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1046 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.0
Right Flare	(%)	8.9
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

1047 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
83

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**13.4**
Right Flare	(%)	**14.8**
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Gateway Dr and W Roberts Ave **$20,500.00**

Total Costs for Curb Ramps along : **N Gateway Dr** **$92,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1483	N Granada Dr	Ave 16

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3803 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3804 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	10.0
Right Flare	(%)	6.2
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3805 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.0
Right Flare	(%)	9.9
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	2.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Granada Dr and Ave 16 **$21,000.00**

E Driveway

1610 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1609 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
22

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	6.6
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1611 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.6**
Right Flare	(%)	9.5
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Granada Dr and Balsam Ct **$10,250.00**

NW Perpendicular

2389 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.5
Right Flare	(%)	7.0
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2387 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
137

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2388 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.4
Right Flare	(%)	3.9
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* N Granada Dr *and* Deborah Ln** **$20,000.00**

E Curb Ramp Required

1567 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1568 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	57.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	6.5
Right Flare	(%)	**13.0**
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1566 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**12.0**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Granada Dr and Greenwood Dr **$20,000.00**

E Curb Ramp Required

1562 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1560 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 31.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	**29.0**
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**31.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.6
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1561 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**12.1**
Right Flare	(%)	9.5
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Granada Dr *and* Monocott Dr **$20,500.00**

NW Perpendicular

2383 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**3.9**

Left Flare	(%)	3.8
Right Flare	(%)	7.4
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 3.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2381 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
51

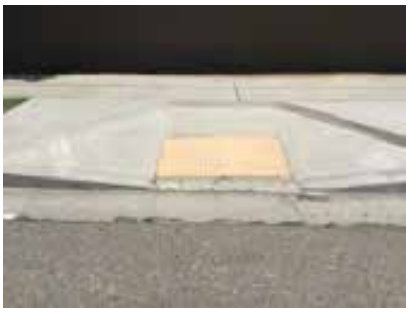

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.4
Right Flare	(%)	10.0
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	0.4	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2382 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 6.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	**6.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**7.0**

Left Flare	(%)	**11.7**
Right Flare	(%)	1.0
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	**4.9**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	3.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Granada Dr and Pamela Dr **$16,000.00**

E Curb Ramp Required

1564 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1565 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 31.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	**32.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**31.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.6**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1563 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	**4.2**
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.5
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Granada Dr and Sandlewood Dr **$20,500.00**

NE Perpendicular

2385 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.4
Right Flare	(%)	6.1
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

2386 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2384 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.0
Right Flare	(%)	5.3
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **N Granada Dr** ***and*** **Steeple Gate** **$20,000.00**

NE Perpendicular

1605 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.5
Right Flare	(%)	7.2
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1607 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	74.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	10.0
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1608 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	4.1
Right Flare	(%)	7.3
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.8	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1606 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	73.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.0
Right Flare	(%)	**12.4**
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Granada Dr and Valley Way **$27,000.00**

Total Costs for Curb Ramps along : **N Granada Dr** **$175,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**399**	**N I St**	**406 N I St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

997 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
149

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S — Curb Ramp Required

996 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
149

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N I St and 406 N I St **$14,000.00**

E Perpendicular

171 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.2**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

170 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
108

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**4.4**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**15.1**
Right Flare	(%)	**14.8**
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

172 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
85

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.7**
Right Flare	(%)	8.5
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

169 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 13.5% Right: 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
76

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**13.5**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.4 2.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N I St and Fifth St **$24,250.00**

E Perpendicular

995 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	109.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.7

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

993 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**13.1**
Right Flare	(%)	**13.4**
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 5.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NE Island-Cut Through

994 Islands

CBC 2019 **11B-406.6**

Unit Cost **$10000.00**

Priority

71

- *As-Built Description:*

Raised islands in crossings shall be cut through level with the street or have curb ramps at both sides. The clear width of the accessible route at island cut-throughs or island perpendiculars shall be 60 inches (1524 mm) wide minimum.

- *As-is* 58.0"
- *Proposed Solution:*

Demolish and provide a 60" minimum wide walkway at the cut-through, refuge island, island perpendicular, or median.

Width of Ramp / Pad	(in)	**58.0**
Length of Ramp / Pad	(in)	268.0
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	**3.9**

Gutter Slope	(%)	4.4
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.0 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

991 Ramp Cross Slope

CBC 2019 **11B-406.5.7**

ADAAG **4.8.6**

PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority

63

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.9%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	56.0
Length of Ramp / Pad	(in)	114.0	64.0
Slope of the Ramp / Pad	(%)	6.3	2.8
X Slope of the Ramp / Pad	(%)	**2.9**	1.4
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.8	N/A
Top Landing X Slope	(%)	0.1	N/A

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.0 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Parallel

992 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 8.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	58.0	76.0
Slope of the Ramp / Pad	(%)	4.9	**8.5**
X Slope of the Ramp / Pad	(%)	1.1	0.7
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.6
Top Landing X Slope	(%)	N/A	1.5

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	**2.1**
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.1	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N I St and W 2Nd St $34,000.00

E Perpendicular

1001 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.3
Right Flare	(%)	7.8
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.3	1.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

998 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.5
Right Flare	(%)	8.3
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

999 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.2
Right Flare	(%)	8.1
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1000 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.8
Right Flare	(%)	**10.8**
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.3 0.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N I St *and* W 4Th St **$27,500.00**

NW Perpendicular

905 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	5.7
Right Flare	(%)	9.8
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	**3.6**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 1.3
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

908 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	60.0
Length of Ramp / Pad	(in)	N/A	103.0
Slope of the Ramp / Pad	(%)	N/A	6.8
X Slope of the Ramp / Pad	(%)	N/A	**2.6**
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	1.2
Top Landing X Slope	(%)	N/A	1.2

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	**2.5**
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.7	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SSW Perpendicular

907 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.0
Right Flare	(%)	9.4
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

WSW Parallel

906 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Right: 39.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**46.0**	**46.0**
Length of Ramp / Pad	(in)	148.0	**46.0**
Slope of the Ramp / Pad	(%)	7.7	4.8
X Slope of the Ramp / Pad	(%)	**2.1**	**2.4**
Top Landing Length	(in)	48.0	**39.0**
Top Landing Slope	(%)	2.0	**3.0**
Top Landing X Slope	(%)	1.2	**2.3**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	**2.6**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	4.8 N/A
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N I St and W Roberts Ave **$24,000.00**

Total Costs for Curb Ramps along : N I St **$123,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1289	N K St	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
E	Perpendicular			

176 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 20.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**20.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	10.0
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

177 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
79

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	**10.1**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

179 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	96.0
Length of Ramp / Pad	(in)	49.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	6.8
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

178 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**12.6**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N K St and Fifth St $27,500.00

NE Combination

98 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.9%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
65

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	120.0	180.0
Slope of the Ramp / Pad	(%)	2.8	2.9
X Slope of the Ramp / Pad	(%)	1.0	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	1.7
Top Landing X Slope	(%)	**2.9**	1.6

Length of Combo. Ramp	(in)	87.0
Combo. Ramp Slope	(%)	7.5
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	50.0
Bottom Landing Slope	(in)	1.4
Bottom Landing X Slope	(in)	0.5
Left Flare	(%)	9.2
Right Flare	(%)	**13.1**
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

99 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.9%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	55.0
Length of Ramp / Pad	(in)	96.0	98.0
Slope of the Ramp / Pad	(%)	3.7	4.6
X Slope of the Ramp / Pad	(%)	1.7	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.9
Top Landing X Slope	(%)	**2.9**	1.1
Length of Combo. Ramp	(in)	88.0	
Combo. Ramp Slope	(%)	6.5	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.0	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	7.9	
Right Flare	(%)	8.4	
Gutter Slope	(%)	**6.1**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.8	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

97 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
59

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	155.0	156.0
Slope of the Ramp / Pad	(%)	4.6	4.0
X Slope of the Ramp / Pad	(%)	0.1	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.4
Top Landing X Slope	(%)	0.6	1.8
Length of Combo. Ramp	(in)	72.0	
Combo. Ramp Slope	(%)	6.3	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	67.0	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	0.3	
Left Flare	(%)	7.4	
Right Flare	(%)	8.2	
Gutter Slope	(%)	3.4	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.1	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

96 Ramp Landing

- *As-Built Description:*

  Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.6%
- *Proposed Solution:*

  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	59.0
Length of Ramp / Pad	(in)	120.0	123.0
Slope of the Ramp / Pad	(%)	5.0	4.6
X Slope of the Ramp / Pad	(%)	1.2	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.8
Top Landing X Slope	(%)	**2.6**	0.9
Length of Combo. Ramp	(in)	72.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	58.0	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	1.0	
Left Flare	(%)	9.2	
Right Flare	(%)	8.0	
Gutter Slope	(%)	**8.7**	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.8	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N K St and W Yosemite Ave **$10,500.00**

Total Costs for Curb Ramps along : N K St **$38,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	202	N L St	Third St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SE — No Sidewalk, Curb Ramp Not Required

977 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW — No Sidewalk, Curb Ramp Not Required

978 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N L St and Third St **$0.00**

Total Costs for Curb Ramps along : N L St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1	N Lake St	Ashlan Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

4006 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	97.0	97.0
Slope of the Ramp / Pad	(%)	1.9	0.8
X Slope of the Ramp / Pad	(%)	0.6	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.5
Top Landing X Slope	(%)	0.5	0.1
Length of Combo. Ramp	(in)	73.0	
Combo. Ramp Slope	(%)	4.4	
Combo. Ramp X Slope	(%)	1.2	
Bottom Landing Length	(in)	61.0	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	4.8	
Right Flare	(%)	4.4	
Gutter Slope	(%)	4.2	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**10.0**	
Street Grade (Left / Right)	(%)	0.3	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE Parallel

4008 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* Left: 2.4%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
69

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	60.0
Length of Ramp / Pad	(in)	87.0	82.0
Slope of the Ramp / Pad	(%)	3.9	3.6
X Slope of the Ramp / Pad	(%)	0.5	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.4**	1.0
Top Landing X Slope	(%)	0.5	1.1

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4007 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	137.0
Slope of the Ramp / Pad	(%)	4.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.0
Right Flare	(%)	5.2
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.2 0.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

4004 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
66

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 10.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	89.0	90.0
Slope of the Ramp / Pad	(%)	2.9	3.4
X Slope of the Ramp / Pad	(%)	0.1	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.1
Top Landing X Slope	(%)	1.3	0.9

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	0.0
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4005 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 38.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	121.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.1
Right Flare	(%)	5.5
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

4003 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and Ashlan Way $18,000.00

NE Perpendicular

4075 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
83

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.7**
Right Flare	(%)	9.4
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.8	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

4074 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 33.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
89

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.8**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**13.0**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.6 2.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4073 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and Daulton Ave **$21,000.00**

NE Perpendicular

2139 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.6
Right Flare	(%)	5.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNW Perpendicular

2140 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority

45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	2.0

Left Flare	(%)	6.6
Right Flare	(%)	8.6
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.2 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2141 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.3 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2144 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.9

Left Flare	(%)	7.3
Right Flare	(%)	4.5
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SSE Perpendicular

2143 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.5
Right Flare	(%)	6.4
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 N/A
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2142 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.2
Right Flare	(%)	6.5
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and E Adell St **$12,500.00**

E Curb Ramp Required

4444 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Perpendicular

4011 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	119.0
Slope of the Ramp / Pad	(%)	2.4
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	4.1
Right Flare	(%)	3.4
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

4009 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
71

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.4
Right Flare	(%)	3.5
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

4010 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Driveway

4443 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St *and* E Clark St **$23,500.00**

NE Perpendicular

2146 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**14.3**
Right Flare	(%)	8.2
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2147 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
59

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.9
Right Flare	(%)	6.2
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

2145 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and E Kennedy St **$16,500.00**

NE Perpendicular

4139 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.6
Right Flare	(%)	7.7
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.4 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4142 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.8**
Right Flare	(%)	**13.1**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	3.4 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4140 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
83

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.6 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4141 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**10.4**
Right Flare	(%)	8.1
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and E Lincoln Ave **$28,000.00**

NE Perpendicular

4064 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.3**
Right Flare	(%)	9.4
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.4 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4065 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.9
Right Flare	(%)	9.8
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4066 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
156

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and E Riverside Dr **$14,000.00**

E Curb Ramp Required

4022 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Parallel

4171 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.5%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	78.0	99.0
Slope of the Ramp / Pad	(%)	5.4	6.3
X Slope of the Ramp / Pad	(%)	1.5	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.2
Top Landing X Slope	(%)	**2.5**	1.2

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.8 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4020 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	2.0

Left Flare	(%)	5.5
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.8 0.8
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

4170 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.6%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
69

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	80.0	85.0
Slope of the Ramp / Pad	(%)	4.8	6.1
X Slope of the Ramp / Pad	(%)	1.0	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	**2.4**
Top Landing X Slope	(%)	1.4	**2.6**

Bottom Landing Length	(in)	58.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	1.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8	0.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4021 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
67

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.9
Right Flare	(%)	5.2
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8	4.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

4169 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
162

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and Green Way **$30,500.00**

E Curb Ramp Required

4000 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4002 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
62

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.7
Right Flare	(%)	4.8
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2 0.1
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4001 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
62

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.0
Right Flare	(%)	6.6
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and James Way **$8,000.00**

E Curb Ramp Required

4133 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4134 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.7
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.9	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4135 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.1**
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	5.1 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and Rush St $21,000.00

NE Parallel

4016 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 10.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	86.0	98.0
Slope of the Ramp / Pad	(%)	2.9	3.8
X Slope of the Ramp / Pad	(%)	0.3	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	1.3
Top Landing X Slope	(%)	0.6	1.0

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4019 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	4.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.0
Right Flare	(%)	6.5
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	4.5	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

4017 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	85.0	95.0
Slope of the Ramp / Pad	(%)	3.0	4.1
X Slope of the Ramp / Pad	(%)	0.8	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	0.8
Top Landing X Slope	(%)	1.6	1.0

Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2	0.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

4018 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
64

- *As-Built Description:*
  The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	2.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.9
Right Flare	(%)	0.1
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.8 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St *and* W Sherwood Way **$11,000.00**

NE Parallel

4012 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
72

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	86.0	102.0
Slope of the Ramp / Pad	(%)	1.6	4.0
X Slope of the Ramp / Pad	(%)	1.8	0.4
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	1.8	N/A

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4015 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	4.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.6
Right Flare	(%)	3.5
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8	1.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Parallel

4013 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 30.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
75

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	94.0	88.0
Slope of the Ramp / Pad	(%)	3.3	3.4
X Slope of the Ramp / Pad	(%)	0.3	0.4
Top Landing Length	(in)	**30.0**	48.0
Top Landing Slope	(%)	0.3	0.3
Top Landing X Slope	(%)	1.3	0.9

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.7
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

4014 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
62

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 10.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	4.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.5
Right Flare	(%)	5.4
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Lake St and Wessmith Way **$7,500.00**

Total Costs for Curb Ramps along : N Lake St **$211,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1151	N M St	Third St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SE — No Sidewalk, Curb Ramp Not Required

975 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW — Perpendicular

976 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.8
Right Flare	(%)	**10.3**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N M St and Third St **$3,250.00**

Total Costs for Curb Ramps along : N M St **$3,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1452	N N St	Fourth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

196 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.8
Right Flare	(%)	8.3
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

195 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.7
Right Flare	(%)	**10.1**
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

193 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.8
Right Flare	(%)	10.0
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

194 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.0**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N N St and Fourth St $28,000.00

SE Perpendicular

918 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.5**
Right Flare	(%)	6.8
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

917 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
33

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N N St and Sunset Ave **$7,000.00**

E No Sidewalk, Curb Ramp Not Required

974 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Curb Ramp Required

973 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

971 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

972 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N N St and Third St **$7,000.00**

Total Costs for Curb Ramps along : N N St **$42,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1423	N O St	Fourth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

608 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
59

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *Proposed Solution:*

Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.2
Right Flare	(%)	6.6
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Combination

605 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.2% Right: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	50.0	50.0
Length of Ramp / Pad	(in)	70.0	73.0
Slope of the Ramp / Pad	(%)	3.3	2.7
X Slope of the Ramp / Pad	(%)	1.1	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	0.3
Top Landing X Slope	(%)	**2.2**	**2.2**
Length of Combo. Ramp	(in)	81.0	
Combo. Ramp Slope	(%)	6.3	
Combo. Ramp X Slope	(%)	0.4	
Bottom Landing Length	(in)	**4.0**	
Bottom Landing Slope	(in)	1.5	
Bottom Landing X Slope	(in)	1.7	
Left Flare	(%)	5.3	
Right Flare	(%)	5.2	
Gutter Slope	(%)	**7.4**	
Gutter XSlope	(%)	0.6	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

607 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
59

Width of Ramp / Pad	(in)	48.0	
Length of Ramp / Pad	(in)	81.5	
Slope of the Ramp / Pad	(%)	6.3	
X Slope of the Ramp / Pad	(%)	0.8	
Top Landing Length	(in)	48.0	
Top Landing Slope	(%)	1.3	
Top Landing X Slope	(%)	0.9	
Left Flare	(%)	5.9	
Right Flare	(%)	6.2	
Gutter Slope	(%)	4.5	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.8	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

606 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.3
Right Flare	(%)	4.6
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.3 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N O St and Fourth St **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

429 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

428 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

427 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **N O St** ***and*** **Pine St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

912 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

911 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Yield Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

909 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Yield Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

910 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N O St and Third St **$0.00**

Total Costs for Curb Ramps along : N O St **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1407	N P St	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

615 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

614 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

616 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 13.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
64

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	200.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**13.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.6 4.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

613 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N P St and Fifth St **$3,000.00**

E Combination

70 Ramp Landing

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
74

- *As-Built Description:*
  Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).
- *As-is* 41.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	50.0
Length of Ramp / Pad	(in)	67.0	**47.0**
Slope of the Ramp / Pad	(%)	3.3	0.9
X Slope of the Ramp / Pad	(%)	0.4	0.7
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	1.1	N/A
Length of Combo. Ramp	(in)	67.0	
Combo. Ramp Slope	(%)	7.0	
Combo. Ramp X Slope	(%)	0.4	
Bottom Landing Length	(in)	**41.0**	
Bottom Landing Slope	(in)	0.9	
Bottom Landing X Slope	(in)	1.2	
Left Flare	(%)	8.5	
Right Flare	(%)	8.6	
Gutter Slope	(%)	1.8	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.1	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

71 Ramp Slope

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
72

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0	
Length of Ramp / Pad	(in)	78.0	
Slope of the Ramp / Pad	(%)	7.2	
X Slope of the Ramp / Pad	(%)	**2.8**	
Top Landing Length	(in)	48.0	
Top Landing Slope	(%)	1.1	
Top Landing X Slope	(%)	**2.4**	
Left Flare	(%)	9.1	
Right Flare	(%)	5.2	
Gutter Slope	(%)	3.9	
Gutter XSlope	(%)	1.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.3	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

69 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
72

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	60.0
Length of Ramp / Pad	(in)	82.0	84.0
Slope of the Ramp / Pad	(%)	2.6	4.7
X Slope of the Ramp / Pad	(%)	1.0	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	0.6
Top Landing X Slope	(%)	1.0	0.1
Length of Combo. Ramp	(in)	64.0	
Combo. Ramp Slope	(%)	7.6	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.3	
Bottom Landing X Slope	(in)	0.3	
Left Flare	(%)	8.7	
Right Flare	(%)	6.9	
Gutter Slope	(%)	4.4	
Gutter XSlope	(%)	1.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.3	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

72 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
72

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	83.0
Length of Ramp / Pad	(in)	80.0	90.0
Slope of the Ramp / Pad	(%)	2.0	4.8
X Slope of the Ramp / Pad	(%)	1.0	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.8
Top Landing X Slope	(%)	1.7	0.1
Length of Combo. Ramp	(in)	60.0	
Combo. Ramp Slope	(%)	7.7	
Combo. Ramp X Slope	(%)	0.4	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.3	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	7.3	
Right Flare	(%)	6.4	
Gutter Slope	(%)	3.4	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.0	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N P St and W Yosemite Ave **$13,500.00**

Total Costs for Curb Ramps along : N P St **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1137	N Park Dr	Redwood Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

956 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

958 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

957 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Park Dr and Redwood Dr **$0.00**

Total Costs for Curb Ramps along : N Park Dr **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1332	N Q St	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

611 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
97

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.0**
Right Flare	(%)	**14.2**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N No Sidewalk, Curb Ramp Not Required

609 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

612 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.5
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**11.2**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**13.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

610 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Q St and Fifth St **$13,500.00**

ESE Parallel

507 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.5	66.5
Length of Ramp / Pad	(in)	88.0	85.0
Slope of the Ramp / Pad	(%)	6.9	5.7
X Slope of the Ramp / Pad	(%)	1.6	2.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.3
Top Landing X Slope	(%)	1.6	1.7

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NE Island-Cut Through

508 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 0.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
68

Width of Ramp / Pad	(in)	96.0
Length of Ramp / Pad	(in)	165.0
Slope of the Ramp / Pad	(%)	0.8
X Slope of the Ramp / Pad	(%)	1.7

Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	0.2 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNE Perpendicular

509 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.0
Right Flare	(%)	4.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

505 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority

59

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

506 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.5
Length of Ramp / Pad	(in)	65.0	89.5
Slope of the Ramp / Pad	(%)	7.0	7.2
X Slope of the Ramp / Pad	(%)	1.5	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.4
Top Landing X Slope	(%)	**2.6**	1.8

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

504 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Q St and Fourth St **$7,000.00**

Total Costs for Curb Ramps along : N Q St **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1537	N Schnoor Ave	2000 N Schnoor Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2432 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.9
Right Flare	(%)	4.5
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2433 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.7
Right Flare	(%)	6.4
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* N Schnoor Ave *and* 2000 N Schnoor Ave** **$13,000.00**

NW Perpendicular

2438 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
50

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.2**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	4.8
Right Flare	(%)	2.8
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2440 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2439 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.4
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Schnoor Ave and Beechwood Way **$16,750.00**

NE No Sidewalk, Curb Ramp Not Required

713 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

711 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

712 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave *and* Evergreen Pl **$0.00**

NE Perpendicular

716 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.6**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

714 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**11.3**
Right Flare	(%)	6.9
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

715 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Fillmore Ave **$20,000.00**

NE Perpendicular

2430 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.3
Right Flare	(%)	3.7
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2429 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
24

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.6
Right Flare	(%)	9.1
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2431 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.3
Right Flare	(%)	5.5
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2428 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.4
Right Flare	(%)	8.1
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Foxglove Way **$22,500.00**

NW Perpendicular

2434 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	8.1
Right Flare	(%)	5.0
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2435 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	**42.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.5**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	3.6
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Ironwood Way **$13,000.00**

NE Perpendicular

720 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.8
Right Flare	(%)	8.0
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

719 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	**13.3**
Right Flare	(%)	10.0
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

717 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.9
Right Flare	(%)	8.8
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

718 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
34

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.2
Right Flare	(%)	7.4
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Jefferson Ave **$26,500.00**

NE Perpendicular

3940 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.1
Right Flare	(%)	10.0
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.0 0.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3942 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
17

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.0
Right Flare	(%)	7.0
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.0 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3941 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.7
Right Flare	(%)	6.4
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.5 4.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3943 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
10

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.1
Right Flare	(%)	8.9
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Kennedy St **$20,500.00**

NE Perpendicular

723 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**11.2**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

722 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	**11.5**
Right Flare	(%)	8.0
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

721 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave *and* Riverview Dr **$14,000.00**

NW Perpendicular

2516 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 2.3%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.3
Right Flare	(%)	7.7
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2517 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**3.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**3.9**

Left Flare	(%)	9.1
Right Flare	(%)	3.3
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	**4.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 3.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Schnoor Ave and Trevor Way $9,750.00

NE Perpendicular

709 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.0
Right Flare	(%)	9.5
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

708 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**13.8**
Right Flare	(%)	8.7
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

710 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.8
Right Flare	(%)	8.8
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

707 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.6
Right Flare	(%)	**11.3**
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* N Schnoor Ave *and* University Ave** **$26,000.00**

NE No Sidewalk, Curb Ramp Not Required

788 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

789 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

787 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **N Schnoor Ave** ***and*** **Westwood Pl** **$0.00**

Total Costs for Curb Ramps along : **N Schnoor Ave** **$182,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	402	N Westberry Blv	Common Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2308 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.7
Right Flare	(%)	7.0
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2307 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.2
Right Flare	(%)	**10.5**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2305 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.4
Right Flare	(%)	8.0
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2306 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.2
Right Flare	(%)	9.1
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Westberry Blv *and* Common Way **$22,500.00**

NE Perpendicular

2357 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.6
Right Flare	(%)	6.7
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2356 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.8
Right Flare	(%)	4.8
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2354 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.0
Right Flare	(%)	6.3
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2355 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
3

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.4
Right Flare	(%)	5.6
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.0 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : N Westberry Blv and Fairfield Way $22,000.00

NE Perpendicular

2300 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.4%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.2
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2299 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.6
Right Flare	(%)	5.7
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2297 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	**3.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.9
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2298 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.8
Right Flare	(%)	4.2
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.75**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : N Westberry Blv and Fairway Ave **$19,250.00**

Total Costs for Curb Ramps along : N Westberry Blv **$63,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1165	National Ave	Accornero Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

803 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

807 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 15.3% Right: 19.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**15.3**
Right Flare	(%)	**19.0**
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**2.0**

Street Grade (Left / Right)	(%)	2.3	0.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

804 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

806 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

805 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

808 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	71.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**12.1**
Right Flare	(%)	**14.4**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : National Ave and Accornero Ave **$16,750.00**

NE No Sidewalk, Curb Ramp Not Required

434 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

435 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

437 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

436 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **National Ave** ***and*** **Fairview Ave** **$0.00**

N No Sidewalk, Curb Ramp Not Required

559 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

560 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

561 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : National Ave *and* Krest St **$0.00**

NE No Sidewalk, Curb Ramp Not Required

430 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

431 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

433 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

432 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **National Ave** ***and*** **Rotan Ave** **$0.00**

E **No Sidewalk, Curb Ramp Not Required**

565 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

669 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

566 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

667 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

670 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

567 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

668 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **National Ave** ***and*** **S Camden Way** **$0.00**

NE Parallel

552 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 0.0" Right: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
65

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	66.5
Length of Ramp / Pad	(in)	106.0	74.0
Slope of the Ramp / Pad	(%)	6.8	6.1
X Slope of the Ramp / Pad	(%)	0.5	0.5
Top Landing Length	(in)	0.0	0.0
Top Landing Slope	(%)	N/A	N/A
Top Landing X Slope	(%)	N/A	N/A

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.0
Bottom Landing X Slope	(%)	1.5
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.2 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	1 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

NW Perpendicular

555 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	2.0

Left Flare	(%)	10.0
Right Flare	(%)	7.4
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	1 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SE Perpendicular

553 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.4
Right Flare	(%)	6.9
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

554 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.5
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.1
Right Flare	(%)	6.8
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : National Ave and Schnoor Ave **$12,500.00**

NE Perpendicular

1662 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 31.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**31.0**
Top Landing Slope	(%)	**5.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.3
Right Flare	(%)	7.4
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1661 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 7.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	**7.9**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.1
Right Flare	(%)	6.7
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1660 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : National Ave *and* Sunnydale St $20,500.00

NE No Sidewalk, Curb Ramp Not Required

442 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

443 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

444 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

445 Compliant Curb Ramp

- *As-Built Description:*

  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.6
Right Flare	(%)	8.7
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : National Ave and Williams Ave **$0.00**

Total Costs for Curb Ramps along : National Ave **$49,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1561	Navel Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2987 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	5.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2988 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Navel Ave and Lemon Ave **$10,250.00**

NE Curb Ramp Required

2994 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2993 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.9
Right Flare	(%)	6.1
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Navel Ave and Tangerine Ave **$13,500.00**

Total Costs for Curb Ramps along : Navel Ave **$23,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	388	Nebraska Ave	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Parallel

4150 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	82.0	79.0
Slope of the Ramp / Pad	(%)	5.5	4.9
X Slope of the Ramp / Pad	(%)	1.9	**3.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.8
Top Landing X Slope	(%)	**2.2**	**3.5**

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	**4.5**
Bottom Landing X Slope	(%)	1.7
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

4149 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	75.0	85.0
Slope of the Ramp / Pad	(%)	4.9	7.2
X Slope of the Ramp / Pad	(%)	0.4	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.3
Top Landing X Slope	(%)	1.6	0.9

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

4147 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 3.5% Right: 2.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	72.0	83.0
Slope of the Ramp / Pad	(%)	8.0	6.0
X Slope of the Ramp / Pad	(%)	**3.5**	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.8**	0.9
Top Landing X Slope	(%)	1.7	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**3.1**
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

4148 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7% Right: 3.0%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
67

		LEFT	RIGHT
Width of Ramp / Pad	(in)	57.0	56.0
Length of Ramp / Pad	(in)	73.0	84.0
Slope of the Ramp / Pad	(%)	7.6	**8.7**
X Slope of the Ramp / Pad	(%)	**2.7**	**3.0**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.4
Top Landing X Slope	(%)	**2.4**	**2.3**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**3.3**
Bottom Landing X Slope	(%)	1.4
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Nebraska Ave and E Cleveland Ave $24,000.00

NE No Sidewalk, Curb Ramp Not Required

1318 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1319 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1317 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1320 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Nebraska Ave *and* Rush St **$0.00**

NE Perpendicular

1363 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.6**
Right Flare	(%)	9.8
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1362 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.9**
Right Flare	(%)	**14.5**
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1360 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**12.6**
Right Flare	(%)	7.6
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1361 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.0**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 2.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Nebraska Ave** ***and*** **W Sherwood Way** **$26,000.00**

Total Costs for Curb Ramps along : **Nebraska Ave** **$50,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	389	Nebraska St	W South St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1293 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	80.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**13.5**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Parallel

1294 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Right: 30.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
68

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	60.0
Length of Ramp / Pad	(in)	72.0	79.0
Slope of the Ramp / Pad	(%)	5.7	5.7
X Slope of the Ramp / Pad	(%)	0.1	**2.1**
Top Landing Length	(in)	48.0	**30.0**
Top Landing Slope	(%)	2.0	1.2
Top Landing X Slope	(%)	1.8	**2.6**

Bottom Landing Length	(in)	70.0
Bottom Landing Slope	(%)	**3.7**
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk		**<48"**	
Crosswalks Served:	(y/n)	1 X-walk	
Tee Intersection:		Yes	
Vertical Curb:		Vertical	

SW Parallel

1295 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 3.5%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	72.0	72.0
Length of Ramp / Pad	(in)	85.0	81.0
Slope of the Ramp / Pad	(%)	5.5	7.4
X Slope of the Ramp / Pad	(%)	1.9	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	0.0
Top Landing X Slope	(%)	1.9	**3.5**

Bottom Landing Length	(in)	65.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Nebraska St and W South St **$13,500.00**

Total Costs for Curb Ramps along : **Nebraska St** **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	682	Neplus Way	Drake St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3110 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.8

Left Flare	(%)	9.2
Right Flare	(%)	3.3
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3108 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	10.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.6
Right Flare	(%)	6.9
Gutter Slope	(%)	5.8
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	2.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3109 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Neplus Way and Drake St **$20,000.00**

Total Costs for Curb Ramps along : Neplus Way **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1139	Nicola Way	Noreen Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3926 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3928 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	74.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**10.7**
Right Flare	(%)	6.1
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3927 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.2"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	54.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.5
Right Flare	(%)	9.0
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	3.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Nicola Way *and* Noreen Way **$16,000.00**

NE Perpendicular

1335 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.4%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.0
Right Flare	(%)	4.0
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1334 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	2.0

Left Flare	(%)	4.1
Right Flare	(%)	4.2
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1333 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Nicola Way and W Sherwood Way **$13,000.00**

Total Costs for Curb Ramps along : Nicola Way **$29,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1232	Ninth St	S K St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

132 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
84

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	0.0	**36.0**
Slope of the Ramp / Pad	(%)	N/A	7.3
X Slope of the Ramp / Pad	(%)	N/A	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	0.2
Top Landing X Slope	(%)	**2.5**	1.8
Length of Combo. Ramp	(in)	73.0	
Combo. Ramp Slope	(%)	7.9	
Combo. Ramp X Slope	(%)	0.8	
Bottom Landing Length	(in)	**36.0**	
Bottom Landing Slope	(in)	**5.7**	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	**11.4**	
Right Flare	(%)	**11.5**	
Gutter Slope	(%)	**6.2**	
Gutter XSlope	(%)	0.6	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Combination

131 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 20.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
81

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**35.0**	**34.0**
Slope of the Ramp / Pad	(%)	8.2	5.2
X Slope of the Ramp / Pad	(%)	0.2	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.4
Top Landing X Slope	(%)	0.4	0.9
Length of Combo. Ramp	(in)	81.0	
Combo. Ramp Slope	(%)	4.7	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	**20.0**	
Bottom Landing Slope	(in)	**7.3**	
Bottom Landing X Slope	(in)	0.7	
Left Flare	(%)	**10.1**	
Right Flare	(%)	**12.0**	
Gutter Slope	(%)	**11.3**	
Gutter XSlope	(%)	1.0	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.5	2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

133 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Ninth St and S K St **$21,000.00**

Total Costs for Curb Ramps along : Ninth St **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	802	Noreen Way	Ashlan Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3986 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3987 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	7.3
Right Flare	(%)	8.9
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3985 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	70.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	54.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.6
Right Flare	(%)	10.0
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Noreen Way *and* Ashlan Way **$20,500.00**

NE Perpendicular

3999 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.2
Right Flare	(%)	8.5
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3998 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	71.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	**3.8**
Top Landing Length	(in)	54.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.6
Right Flare	(%)	8.0
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3997 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Noreen Way and Asti Way **$20,500.00**

Total Costs for Curb Ramps along : Noreen Way **$41,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1320	Oak St	Grove St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2758 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

2757 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2756 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Oak St** ***and*** **Grove St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

2759 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2762 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2760 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2761 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
67

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	108.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.9
Right Flare	(%)	**11.3**
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.9 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Oak St and Park St **$6,500.00**

Total Costs for Curb Ramps along : Oak St **$6,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	613	Oakridge Dr	Deerwood Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

405 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

406 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.5
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

407 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	70.5
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**12.0**
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Oakridge Dr and Deerwood Ct **$20,000.00**

SW Perpendicular

404 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	56.5
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.0**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Oakridge Dr and Deerwood Dr	**$7,000.00**
Total Costs for Curb Ramps along : Oakridge Dr	**$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	732	Olive Ave	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

10 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	49.5
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**10.9**
Right Flare	(%)	5.6
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.6 0.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

8 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	**46.0**
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	1.5
Right Flare	(%)	3.7
Gutter Slope	(%)	**13.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

9 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and **$20,500.00**

N Island-Cut Through

3043 Ramp Slope

CBC 2019 **11B-405.3**

Unit Cost **$10000.00**

Priority

60

- *As-Built Description:*

  Cross slope of an existing island cut-through or island perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 4.3%
- *Proposed Solution:*

  Demolish existing and provide a new island cut-through or island perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	120.0
Slope of the Ramp / Pad	(%)	1.0
X Slope of the Ramp / Pad	(%)	**4.3**

Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE Perpendicular

3042 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**

ADAAG **4.7.7, 4.29.1&2**

ADA-2010 **705.1**

Unit Cost **$500.00**

Priority

42

- *As-Built Description:*

  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.6
Right Flare	(%)	5.6
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3044 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
42

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.1
Right Flare	(%)	7.8
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3041 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Olive Ave and Don Miguel St **$11,000.00**

SE Perpendicular

44 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.6**
Right Flare	(%)	8.2
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.8	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

43 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 11.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
67

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.6
Right Flare	(%)	**11.3**
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.1	1.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)		
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Olive Ave and Grove St **$6,500.00**

NE Curb Ramp Required

2732 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2731 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.6
Right Flare	(%)	7.8
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2730 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**10.7**
Right Flare	(%)	2.9
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.2	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	Faded	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Olive Ave *and* Howard Rd **$16,500.00**

N Perpendicular

21 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
68

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.9
Right Flare	(%)	**10.8**
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	N/A
Stop/Yield Control:	(y/n)	Yes-Yield Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Parallel

19 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
70

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	75.0	85.0
Length of Ramp / Pad	(in)	51.0	**37.0**
Slope of the Ramp / Pad	(%)	7.0	5.2
X Slope of the Ramp / Pad	(%)	**2.3**	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**4.4**	**3.4**
Top Landing X Slope	(%)	1.0	1.8

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.7 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Parallel

20 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
61

- *As-Built Description:*
  Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* Left: 5.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	94.0	74.0
Length of Ramp / Pad	(in)	72.0	55.0
Slope of the Ramp / Pad	(%)	6.9	7.0
X Slope of the Ramp / Pad	(%)	1.6	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**5.3**	1.6
Top Landing X Slope	(%)	2.0	0.1

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.3
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0 3.0
Stop/Yield Control:	(y/n)	Yes-Yield Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Martin St **$13,750.00**

NE Island-Cut Through

58 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
77

Width of Ramp / Pad	(in)	94.0
Length of Ramp / Pad	(in)	177.0
Slope of the Ramp / Pad	(%)	2.5
X Slope of the Ramp / Pad	(%)	0.9

Gutter Slope	(in)	0.0
Gutter XSlope	(y/n)	NO
Gutter Lip		
Truncated Domes		

Street Grade (Left / Right)	(%)	1.9 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

59 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 41.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
104

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	13.2
X Slope of the Ramp / Pad	(%)	3.5
Top Landing Length	(in)	41.0
Top Landing Slope	(%)	4.0
Top Landing X Slope	(%)	1.7

Left Flare	(%)	12.6
Right Flare	(%)	9.9
Gutter Slope	(%)	5.4
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	1.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.8 0.8
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

56 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.6
Right Flare	(%)	6.7
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

57 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Park St **$23,500.00**

NE No Sidewalk, Curb Ramp Not Required

3034 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
12

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3033 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SE Perpendicular

3036 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**14.6**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**14.2**
Right Flare	(%)	9.8
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3035 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Olive Ave and Roosevelt Ave **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

3074 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3073 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3072 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave *and* S G St **$7,000.00**

NE Parallel

5 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 9.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	67.0	67.0
Length of Ramp / Pad	(in)	54.0	54.0
Slope of the Ramp / Pad	(%)	**9.5**	7.9
X Slope of the Ramp / Pad	(%)	1.1	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.9	1.5
Top Landing X Slope	(%)	**3.2**	1.0

Bottom Landing Length	(in)	50.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

6 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
81

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.0% Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	68.0	68.0
Length of Ramp / Pad	(in)	62.0	53.0
Slope of the Ramp / Pad	(%)	6.0	6.8
X Slope of the Ramp / Pad	(%)	**3.0**	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.6
Top Landing X Slope	(%)	**3.0**	**2.4**

Bottom Landing Length	(in)	58.0
Bottom Landing Slope	(%)	**3.8**
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	**14.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

7 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and S I St **$21,000.00**

NE Parallel

22 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.8%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
87

		LEFT	RIGHT
Width of Ramp / Pad	(in)	103.0	72.0
Length of Ramp / Pad	(in)	71.0	51.0
Slope of the Ramp / Pad	(%)	7.9	2.9
X Slope of the Ramp / Pad	(%)	0.7	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.5
Top Landing X Slope	(%)	1.1	**3.3**

Bottom Landing Length	(in)	63.0
Bottom Landing Slope	(%)	**2.8**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.4
Stop/Yield Control:	(y/n)	Yes-Yield Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

23 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
94

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	6.3
Right Flare	(%)	7.7
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	**3.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

25 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
73

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.0
Right Flare	(%)	8.3
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

24 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.4
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and S K St **$27,500.00**

NE Perpendicular

35 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.7
Right Flare	(%)	7.8
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

37 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.9
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

36 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and S N St **$21,000.00**

N Driveway

47 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

46 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 12.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
72

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**12.0**
Right Flare	(%)	8.9
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

45 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.2%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
69

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	48.0
Length of Ramp / Pad	(in)	N/A	64.0
Slope of the Ramp / Pad	(%)	N/A	5.7
X Slope of the Ramp / Pad	(%)	N/A	1.8
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	1.2
Top Landing X Slope	(%)	N/A	1.8

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	2.0
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 2.0
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and S O St **$6,250.00**

NE Perpendicular

38 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
108

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**15.0**
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	**3.5**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

39 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
81

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.6
Right Flare	(%)	9.4
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

40 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
160

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and S P St **$16,500.00**

N Driveway

55 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

54 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
75

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.4
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

53 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	134.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.2
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 1.2
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Santa Bonita St **$10,250.00**

ENE Perpendicular

29 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	90.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.1
Right Flare	(%)	0.1
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

27 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
73

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.3**
Right Flare	(%)	7.5
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.9
Stop/Yield Control:	(y/n)	Yes-Yield Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

28 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
71

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	114.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**15.2**
Right Flare	(%)	5.2
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

31 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.5"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**47.5**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.0**
Right Flare	(%)	10.0
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

30 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.5
Right Flare	(%)	**10.4**
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Ped Signal Only
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

WNW Perpendicular

26 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.0
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Santa Cruz St **$37,750.00**

NE Perpendicular

41 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**11.4**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.9 1.0
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

42 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.3
Right Flare	(%)	9.9
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Sixth St **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

3477 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3480 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 8.4%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.9
Right Flare	(%)	7.2
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.8	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3478 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW Perpendicular

3479 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	7.3
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Olive Ave and Tozer St **$6,000.00**

NE Perpendicular

3086 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
33

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.6**
Right Flare	(%)	7.3
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.8	3.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

3087 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3088 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	7.5
Right Flare	(%)	5.3
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3089 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	6.7
Right Flare	(%)	7.4
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.4 0.4
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Olive Ave and Wallace Ave **$19,500.00**

Total Costs for Curb Ramps along : **Olive Ave** **$285,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	474	Orange Tree Dr	Toschi Dr

NW — Perpendicular

2684 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Measurements		
Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.6
Right Flare	(%)	5.5
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2682 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

Measurements		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2683 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.0
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Orange Tree Dr and Toschi Dr **$20,000.00**

Total Costs for Curb Ramps along : Orange Tree Dr **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1110	Orchard Ave	Fillmore Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

4391 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — Perpendicular

4392 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**13.0**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

4393 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**14.6**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Orchard Ave *and* Fillmore Ave $20,500.00

NE No Sidewalk, Curb Ramp Not Required

777 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

778 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

776 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

779 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
72

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.9**
Right Flare	(%)	6.7
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Orchard Ave** ***and*** **Venturi Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Orchard Ave** **$27,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1547	Orchard Hill Dr	Colima Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2797 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Perpendicular

2796 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.3
Right Flare	(%)	2.8
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Orchard Hill Dr** ***and*** **Colima Ave** **$9,500.00**

Total Costs for Curb Ramps along : **Orchard Hill Dr** **$9,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	625	Oso Dr	Knox St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3096 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3094 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	9.3
Right Flare	(%)	4.1
Gutter Slope	(%)	**13.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3095 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	4.3
Right Flare	(%)	7.9
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**14.0**

Street Grade (Left / Right)	(%)	2.6 2.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Oso Dr and Knox St **$20,000.00**

Total Costs for Curb Ramps along : Oso Dr **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	22	Owens St	Adell St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

3873 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — No Sidewalk, Curb Ramp Not Required

3875 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3874 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Owens St and Adell St **$0.00**

E Curb Ramp Required

1195 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1197 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	58.5
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.0**
Right Flare	(%)	**14.9**
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

1196 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
41

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Owens St and Harding Ave **$13,500.00**

E No Sidewalk, Curb Ramp Not Required

3871 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW No Sidewalk, Curb Ramp Not Required

3870 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW Perpendicular

3872 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
31

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.8**
Right Flare	(%)	8.2
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Owens St and W Clark St **$7,000.00**

Total Costs for Curb Ramps along : Owens St **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	558	Padre St	Peerless St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3115 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3113 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.4
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3114 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.4
Right Flare	(%)	6.2
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.8 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Padre St and Peerless St $20,000.00

SE Perpendicular

3116 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.0
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **Curb Ramp Required**

3117 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Padre St** ***and*** **Solano St** **$13,500.00**

Total Costs for Curb Ramps along : **Padre St** **$33,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	893	Paintbrush Dr	Easy Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
E	Perpendicular			

1471 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.1
Right Flare	(%)	7.9
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1469 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.4**
Right Flare	(%)	9.2
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1470 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Paintbrush Dr and Easy Ct **$16,750.00**

E Perpendicular

1468 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.3**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

1466 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1467 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**12.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.8**
Right Flare	(%)	9.6
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Paintbrush Dr *and* Fairmont Ct **$20,000.00**

E Perpendicular

1473 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.8
Right Flare	(%)	7.2
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1474 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.2
Right Flare	(%)	7.7
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 3.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1472 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Paintbrush Dr and Love Ct **$16,750.00**

N No Sidewalk, Curb Ramp Not Required

1478 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1479 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 10.6%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.0
Right Flare	(%)	9.9
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1480 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**13.1**
X Slope of the Ramp / Pad	(%)	**4.9**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.4**
Right Flare	(%)	9.9
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Paintbrush Dr *and* Riverview Dr **$13,000.00**

N Perpendicular

1464 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.4
Right Flare	(%)	9.6
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

1463 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

1465 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.2
Right Flare	(%)	**12.5**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**0.6**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Paintbrush Dr** ***and*** **Tragon St** **$20,000.00**

Total Costs for Curb Ramps along : **Paintbrush Dr** **$86,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	609	Pamela Dr	De Ann Cove

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2370 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
3

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	4.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.4
Right Flare	(%)	4.7
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.0	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2369 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
1

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	4.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.5

Left Flare	(%)	4.1
Right Flare	(%)	5.0
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2371 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Curb Ramp Required

2368 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pamela Dr and De Ann Cove $23,000.00

NE Perpendicular

2379 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**3.6**

Left Flare	(%)	3.3
Right Flare	(%)	6.4
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2378 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
25

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.1
Right Flare	(%)	4.4
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2380 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pamela Dr and Deborah Ln **$20,000.00**

NE Perpendicular

2376 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.7
Right Flare	(%)	5.5
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.1 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2375 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 10.0%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
21

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	4.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.1
Right Flare	(%)	4.1
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.5 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE **Curb Ramp Required**

2377 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pamela Dr** ***and*** **Taylor Lane** **$16,500.00**

Total Costs for Curb Ramps along : **Pamela Dr** **$59,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1493	Papaya St	E Almond Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3511 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3512 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.1
Right Flare	(%)	4.0
Gutter Slope	(%)	**13.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3510 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.7

Left Flare	(%)	4.7
Right Flare	(%)	9.2
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Papaya St and E Almond Ave **$20,000.00**

Total Costs for Curb Ramps along : Papaya St **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	428	Park Ln	N Park Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

937 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

939 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

938 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Park Ln and N Park Dr **$0.00**

Total Costs for Curb Ramps along : Park Ln **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1247	Park St	Maple St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2749 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

2748 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2747 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Park St** ***and*** **Maple St** **$0.00**

Total Costs for Curb Ramps along : **Park St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1499	Parkwood Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3016 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.0
Right Flare	(%)	8.7
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3012 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.1
Right Flare	(%)	7.2
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3013 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3015 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.2
Right Flare	(%)	6.2
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3014 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Parkwood Ave and Lemon Ave **$33,500.00**

NE Perpendicular

3002 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.7
Right Flare	(%)	7.4
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

3005 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3003 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.4
Right Flare	(%)	8.8
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	**8.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

3004 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Parkwood Ave and Raymond Thomas St **$13,000.00**

ENE Perpendicular

3010 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.0
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NNE Perpendicular

3011 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.8
Right Flare	(%)	4.3
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3006 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.2
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3009 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.4
Right Flare	(%)	7.0
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSW Perpendicular

3008 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.5
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

WSW Perpendicular

3007 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.0
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Parkwood Ave and Valencia Ave **$39,000.00**

Total Costs for Curb Ramps along : **Parkwood Ave** **$85,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	421	Paseo Del Mar Prkw	Rancho Mirage Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3140 Ramp Width

- *As-Built Description:*

  Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.7
Right Flare	(%)	5.2
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.7 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3141 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.1
Right Flare	(%)	7.6
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		N/A	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3142 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Paseo Del Mar Prkw** ***and*** **Rancho Mirage Rd** **$16,500.00**

NW Perpendicular

3464 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	4.9
Right Flare	(%)	7.3
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3466 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3465 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.0
Right Flare	(%)	8.7
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Paseo Del Mar Prkw and San Gabriel Dr **$20,000.00**

Total Costs for Curb Ramps along : Paseo Del Mar Prkw **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1182	Paul Ave	Schnoor Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

795 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

796 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

794 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Paul Ave** ***and*** **Schnoor Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Paul Ave** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	306	Peach Ct	Peach St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3499 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.7
Right Flare	(%)	2.1
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.4 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3501 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.4
Right Flare	(%)	5.6
Gutter Slope	(%)	11.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	1.0	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3500 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Peach Ct and Peach St **$20,000.00**

Total Costs for Curb Ramps along : Peach Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1593	Peach St	Nectarine St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Parallel

3502 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.6% Right: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	98.0	85.0
Slope of the Ramp / Pad	(%)	6.3	4.0
X Slope of the Ramp / Pad	(%)	1.5	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.6
Top Landing X Slope	(%)	**2.6**	**2.1**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**14.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.0	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW — Curb Ramp Required

3503 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Peach St and Nectarine St **$10,500.00**

Total Costs for Curb Ramps along : Peach St **$10,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1472	Peach Tree Dr	Apple Tree Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2644 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
6

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.6
Right Flare	(%)	8.0
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2645 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2643 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
4

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	3.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.4
Right Flare	(%)	5.6
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Peach Tree Dr *and* Apple Tree Ct **$16,750.00**

NE Perpendicular

2638 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
11

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.2
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2637 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
14

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	5.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.3
Right Flare	(%)	5.4
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.5	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2639 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Peach Tree Dr** ***and*** **Cherry Tree Dr** **$13,500.00**

NE Perpendicular

2642 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
4

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	2.2
Right Flare	(%)	5.0
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.7	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2641 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
6

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	4.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.2
Right Flare	(%)	6.8
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.8	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2640 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Peach Tree Dr** ***and*** **Orange Tree Ct** **$13,500.00**

NE Curb Ramp Required

2651 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2649 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.2
Right Flare	(%)	6.1
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2650 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.2
Right Flare	(%)	6.5
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Peach Tree Dr and Pear Tree Dr **$16,750.00**

Total Costs for Curb Ramps along : **Peach Tree Dr** **$60,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1473	Peanut Ct	Peach Tree Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Perpendicular

2647 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
4

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	4.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.2
Right Flare	(%)	4.8
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.1	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW — Curb Ramp Required

2648 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2646 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.5
Right Flare	(%)	5.4
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Peanut Ct and Peach Tree Dr **$13,500.00**

Total Costs for Curb Ramps along : Peanut Ct **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	562	Peanut Dr	Toschi Dr

NW — Perpendicular

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

2694 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.
- *Notes:* 1.0 in lip where curb and BL meet

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
7

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.1
Right Flare	(%)	2.4
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.8	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2692 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2693 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
7

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	5.6
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Peanut Dr and Toschi Dr **$20,000.00**

Total Costs for Curb Ramps along : Peanut Dr **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	158	Pear Ct	Pear St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N **Perpendicular**

3517 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.3
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.0 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3519 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.2
Right Flare	(%)	5.6
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3518 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pear Ct and Pear St **$13,250.00**

Total Costs for Curb Ramps along : Pear Ct **$13,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1588	Pear St	Apple St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SW **Parallel**

3476 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	87.0	93.0
Slope of the Ramp / Pad	(%)	6.4	3.1
X Slope of the Ramp / Pad	(%)	1.8	2.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	1.0
Top Landing X Slope	(%)	1.3	1.9

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Pear St and Apple St **$7,000.00**

NE Perpendicular

3515 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.8

Left Flare	(%)	4.0
Right Flare	(%)	7.8
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.0 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3514 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.5
Right Flare	(%)	5.4
Gutter Slope	(%)	**12.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3516 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.1**
Right Flare	(%)	3.6
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3513 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.2
Right Flare	(%)	8.3
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pear St and E Almond Ave **$26,000.00**

NW Perpendicular

3522 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.5
Right Flare	(%)	6.9
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3521 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3520 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.7
Right Flare	(%)	3.6
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pear St *and* Kiwi St **$13,000.00**

NE Perpendicular

3540 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.6

Left Flare	(%)	9.2
Right Flare	(%)	2.4
Gutter Slope	(%)	**12.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3541 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3539 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.8
Right Flare	(%)	8.3
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.2	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Pear St and Madarin St **$20,000.00**

Total Costs for Curb Ramps along : Pear St **$66,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1534	Pear Tree Dr	Berry Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2664 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Perpendicular

2663 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	8.9
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Pear Tree Dr and Berry Dr **$13,500.00**

NE Perpendicular

2630 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	2.3
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	7.2
Right Flare	(%)	3.2
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2629 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
4

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.5
Right Flare	(%)	5.4
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

2631 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pear Tree Dr** ***and*** **Hazelnut Dr** **$13,500.00**

Total Costs for Curb Ramps along : **Pear Tree Dr** **$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	413	Pecan Ave	Apricot Lane

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2984 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

2983 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pecan Ave and Apricot Lane **$0.00**

NE Perpendicular

2933 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.5
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2934 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.0
Right Flare	(%)	6.2
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2936 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2935 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pecan Ave** ***and*** **Ave 13** **$9,500.00**

NE Perpendicular

2869 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	6.7
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2868 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.8
Right Flare	(%)	5.3
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2870 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Pecan Ave *and* Colombard Dr — $13,000.00

NE Perpendicular

2859 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.9%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	2.0

Left Flare	(%)	8.9
Right Flare	(%)	8.1
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2860 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.1**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2861 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Pecan Ave** ***and*** **Concord Ct** **$13,000.00**

NE Perpendicular

2862 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.0
Right Flare	(%)	9.0
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

2863 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE No Sidewalk, Curb Ramp Not Required

2864 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

***Total Costs for Curb Ramps at :* Pecan Ave *and* Monterey St** **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

2826 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE Perpendicular

2825 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.2
Right Flare	(%)	4.9
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.2 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2824 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**12.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.9
Right Flare	(%)	6.7
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.0 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pecan Ave and Munra Ave **$13,000.00**

NE Perpendicular

2821 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	7.0
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNW Perpendicular

2820 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.2%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.4

Left Flare	(%)	4.6
Right Flare	(%)	8.3
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2822 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

2823 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

WNW Perpendicular

2819 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.0
Right Flare	(%)	7.6
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Pecan Ave *and* Pine St **$9,500.00**

NE Perpendicular

2817 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.2
Right Flare	(%)	7.1
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.7	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2816 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
30

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.6
Right Flare	(%)	5.3
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2818 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Pecan Ave and Victory Lane **$1,000.00**

Total Costs for Curb Ramps along : Pecan Ave **$65,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	517	Penny Way	Fairfield Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2362 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.3
Right Flare	(%)	7.6
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2361 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.7
Right Flare	(%)	**10.1**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2363 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Penny Way and Fairfield Way **$12,750.00**

NW Curb Ramp Required

2293 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2291 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.6
Right Flare	(%)	9.3
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2292 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.9
Right Flare	(%)	4.8
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.0	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Penny Way and Fairway Ave **$16,000.00**

Total Costs for Curb Ramps along : Penny Way **$28,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	147	Percy St	Clinton St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

3208 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
49

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — Combination

3207 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**46.0**	48.0
Length of Ramp / Pad	(in)	59.0	57.0
Slope of the Ramp / Pad	(%)	4.5	4.8
X Slope of the Ramp / Pad	(%)	1.8	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	2.8
Top Landing X Slope	(%)	1.7	1.9
Length of Combo. Ramp	(in)	53.0	
Combo. Ramp Slope	(%)	7.8	
Combo. Ramp X Slope	(%)	0.0	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.9	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	5.5	
Right Flare	(%)	5.7	
Gutter Slope	(%)	**6.8**	
Gutter XSlope	(%)	1.0	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	**9.0**	

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3206 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.7
Right Flare	(%)	7.8
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Percy St *and* Clinton St** **$10,000.00**

E No Sidewalk, Curb Ramp Not Required

3214 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3213 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
42

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.7
Right Flare	(%)	7.7
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

3215 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.4
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.4 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Percy St and Santa Fe St **$3,500.00**

Total Costs for Curb Ramps along : **Percy St** **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1564	Perkins Ave	Lemon Ave

SE — Curb Ramp Required

3018 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3017 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.6
Right Flare	(%)	5.9
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Perkins Ave and Lemon Ave **$10,250.00**

NE Perpendicular

2995 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.7
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2997 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2996 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	5.5
Right Flare	(%)	6.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Perkins Ave and Tangerine Ave **$20,000.00**

Total Costs for Curb Ramps along : Perkins Ave **$30,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1590	Persimmon St	Coconut St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3486 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	46.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.8
Right Flare	(%)	7.3
Gutter Slope	(%)	9.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	1.3	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Curb Ramp Required

3487 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Persimmon St and Coconut St **$13,500.00**

Total Costs for Curb Ramps along : Persimmon St **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	615	Petite Ave	Merlot Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2530 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.2
Right Flare	(%)	5.9
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2529 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.9
Right Flare	(%)	6.8
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2531 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	10.0
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2532 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.6
Right Flare	(%)	7.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Petite Ave *and* Merlot Ave **$18,500.00**

NE Perpendicular

2533 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.9
Right Flare	(%)	6.4
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

2535 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2534 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.4
Right Flare	(%)	6.6
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Petite Ave and Rhine Ct **$20,000.00**

Total Costs for Curb Ramps along : Petite Ave **$38,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1210	Petite Ct	Petite Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2538 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.0
Right Flare	(%)	6.7
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2537 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.5
Right Flare	(%)	6.4
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2536 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Petite Ct and Petite Ave **$20,000.00**

Total Costs for Curb Ramps along : Petite Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	53	Philip St	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1215 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	3.2
Right Flare	(%)	6.1
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1214 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.3
Right Flare	(%)	4.7
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Philip St and E Cleveland Ave **$9,750.00**

N No Sidewalk, Curb Ramp Not Required

1243 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1245 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.3
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1244 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.1
Right Flare	(%)	4.6
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Philip St and W Sherwood Way **$13,000.00**

Total Costs for Curb Ramps along : Philip St **$22,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	347	Pierce Ln	Coolidge St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1938 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
23

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.4**
Right Flare	(%)	6.0
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1937 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	6.8
Right Flare	(%)	8.2
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1936 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pierce Ln and Coolidge St **$16,750.00**

NE Perpendicular

1931 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**6.1**

Left Flare	(%)	**12.1**
Right Flare	(%)	3.1
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	3.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1932 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.5
Right Flare	(%)	6.6
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

1930 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pierce Ln** ***and*** **Madison Dr** **$20,000.00**

Total Costs for Curb Ramps along : **Pierce Ln** **$36,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1539	Pine St	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2726 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
159

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

2736 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.5

Left Flare	(%)	4.3
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2724 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.9
Right Flare	(%)	9.7
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2737 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	7.8
Right Flare	(%)	3.1
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	**3.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

2725 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

2738 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pine St and **$23,000.00**

E No Sidewalk, Curb Ramp Not Required

501 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
59

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

503 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

502 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pine St *and* Fourth St $0.00

NE Perpendicular

2769 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.8
Right Flare	(%)	8.0
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.0	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

2770 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2771 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pine St** ***and*** **Gill Ave** **$3,000.00**

E No Sidewalk, Curb Ramp Not Required

424 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

426 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

425 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pine St *and* National Ave **$0.00**

N Perpendicular

4388 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 2.7%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	52.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.3**
Right Flare	(%)	8.6
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Parallel

4390 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 7.3% Right: 4.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
76

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	53.0
Length of Ramp / Pad	(in)	111.0	92.0
Slope of the Ramp / Pad	(%)	**9.5**	1.0
X Slope of the Ramp / Pad	(%)	**7.3**	**4.4**
Top Landing Length	(in)	50.0	48.0
Top Landing Slope	(%)	**5.6**	0.7
Top Landing X Slope	(%)	**6.8**	0.9

Bottom Landing Length	(in)	54.0
Bottom Landing Slope	(%)	**7.7**
Bottom Landing X Slope	(%)	**3.5**
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	1.9
Stop/Yield Control:	(y/n)	Stop Light	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Driveway

4389 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pine St and Oak St **$10,250.00**

E No Sidewalk, Curb Ramp Not Required

421 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
37

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

423 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
37

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

422 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
37

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Pine St** ***and*** **Third St** **$0.00**

Total Costs for Curb Ramps along : **Pine St** **$36,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1342	Pinewood Ct	Pinewood Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1597 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	4.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	5.6
Right Flare	(%)	1.0
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1600 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.3
Right Flare	(%)	6.0
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1598 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	2.7
Right Flare	(%)	6.3
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1599 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	3.1
Right Flare	(%)	3.0
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Pinewood Ct** ***and*** **Pinewood Dr** **$28,000.00**

Total Costs for Curb Ramps along : **Pinewood Ct** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	839	Pinewood Dr	Monocott Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1580 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 3.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**13.0**
Right Flare	(%)	4.6
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1579 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
14

Width of Ramp / Pad	(in)	84.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.0**
Right Flare	(%)	8.0
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1578 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pinewood Dr and Monocott Dr **$16,750.00**

NE Perpendicular

1601 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.5
Right Flare	(%)	6.3
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1602 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.7
Right Flare	(%)	7.5
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7. 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1604 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.3
Right Flare	(%)	**10.4**
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	**10.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1603 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**5.7**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.6**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Pinewood Dr and N Granada Dr **$27,000.00**

Total Costs for Curb Ramps along : **Pinewood Dr** **$43,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1041	Plumas St	DWayer Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2621 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	11.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.0

Left Flare	(%)	13.4
Right Flare	(%)	12.3
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.25
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.4	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2622 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Plumas St and DWayer Ave **$6,500.00**

Total Costs for Curb Ramps along : Plumas St **$6,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1579	Podres Ln	Lilly St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
N	Perpendicular			

3293 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.1
Right Flare	(%)	6.0
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3294 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.8
Right Flare	(%)	5.0
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Podres Ln *and* Lilly St** **$9,000.00**

***Total Costs for Curb Ramps along :* Podres Ln** **$9,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1486	Polk Ave	Truman Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

1944 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

1943 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**4.5**

Left Flare	(%)	8.6
Right Flare	(%)	2.2
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1946 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	3.6
Right Flare	(%)	6.2
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1942 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.9

Left Flare	(%)	7.2
Right Flare	(%)	4.8
Gutter Slope	(%)	**15.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1945 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	44.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.8
Right Flare	(%)	4.6
Gutter Slope	(%)	14.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	2.7	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1941 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Polk Ave and Truman Dr **$33,000.00**

Total Costs for Curb Ramps along : Polk Ave **$33,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	184	Pomegranate St	Persimmon St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3489 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3488 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.6
Right Flare	(%)	3.8
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3490 Ramp Landing

- *As-Built Description:*

  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	2.4
Right Flare	(%)	6.4
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Pomegranate St and Persimmon St **$16,750.00**

Total Costs for Curb Ramps along : Pomegranate St **$16,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	552	Popoli Way	Gabriel Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3904 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3903 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.8
Right Flare	(%)	9.9
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Popoli Way and Gabriel Way **$13,500.00**

Total Costs for Curb Ramps along : Popoli Way **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	97	Quady Ln	Oakridge Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

213 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	67.5
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**4.0**

Left Flare	(%)	**10.5**
Right Flare	(%)	3.1
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

212 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.3
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

211 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Quady Ln and Oakridge Dr **$20,000.00**

Total Costs for Curb Ramps along : Quady Ln **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1573	Rancho Mirage Rd	La Quinta Way

NE — Perpendicular

3143 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Measurements		
Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.9

Left Flare	(%)	4.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**13.0**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Curb Ramp Required

3144 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

Measurements		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rancho Mirage Rd ***and*** La Quinta Way **$13,500.00**

NE Perpendicular

3134 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
47

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	9.5
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3136 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3135 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	5.3
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.0	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Rancho Mirage Rd *and* Linda Mesa Dr** **$20,000.00**

NE Curb Ramp Required

3133 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3132 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
45

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	8.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.6
Right Flare	(%)	6.7
Gutter Slope	(%)	11.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	0.5	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Rancho Mirage Rd *and* Loma Linda Dr $13,500.00

NE Curb Ramp Required

3131 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3130 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.2
Right Flare	(%)	4.6
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.0 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3129 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 11.0%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.9
Right Flare	(%)	7.1
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rancho Mirage Rd and Ortega Dr **$16,500.00**

Total Costs for Curb Ramps along : **Rancho Mirage Rd** **$63,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	251	Rd 27	E Ellis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2136 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
12

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.5
Right Flare	(%)	5.7
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Blended Transition

2137 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Length of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Top Landing Length	(in)		
Top Landing Slope	(%)		
Top Landing X Slope	(%)		

Bottom Landing Length	(in)	118.0
Bottom Landing Slope	(%)	0.2
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2135 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**11.1**
Right Flare	(%)	2.7
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW **No Sidewalk, Curb Ramp Not Required**

2138 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Rd 27** ***and*** **E Ellis St** **$12,500.00**

Total Costs for Curb Ramps along : **Rd 27** **$12,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1453	Rd 28	Ave 13 1/2

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3529 Compliant Curb Ramp

- *As-Built Description:*

  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

20

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.2
Right Flare	(%)	6.5
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3530 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 14.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	4.9
Right Flare	(%)	5.3
Gutter Slope	(%)	**14.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.2	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3528 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW Perpendicular

3527 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**10.2**
Right Flare	(%)	5.6
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.5 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rd 28 and Ave 13 1/2 $6,000.00

E No Sidewalk, Curb Ramp Not Required

4413 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

4412 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.1
Right Flare	(%)	**13.2**
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 0.2
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4414 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	**11.0**
Right Flare	(%)	8.2
Gutter Slope	(%)	**11.3**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rd 28 and Knox Rd **$14,000.00**

Total Costs for Curb Ramps along : **Rd 28** **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	482	Ren Way	Double Tree Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1853 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
18

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.9
Right Flare	(%)	5.5
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1854 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.8
Right Flare	(%)	8.5
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1852 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ren Way and Double Tree Way **$21,000.00**

E Driveway

1775 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1774 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1773 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ren Way** ***and*** **Granada Dr** **$0.00**

E Curb Ramp Required

1870 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1871 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.0**
Right Flare	(%)	**12.7**
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1872 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
33

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.1
Right Flare	(%)	**12.4**
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ren Way and Westberry Blvd **$21,000.00**

NE Perpendicular

1704 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**13.1**
Right Flare	(%)	6.2
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1703 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
17

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.6
Right Flare	(%)	7.1
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1702 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Ren Way and Zak Way **$20,000.00**

Total Costs for Curb Ramps along : Ren Way **$62,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	974	Renee Way	Lucia Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

3925 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.6**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3924 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	51.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**15.5**
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3923 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Renee Way and Lucia Way **$20,000.00**

E Curb Ramp Required

3930 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3931 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	69.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.1**
Right Flare	(%)	7.7
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3929 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.7
Right Flare	(%)	**11.6**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Renee Way and Noreen Way **$20,000.00**

Total Costs for Curb Ramps along : Renee Way **$40,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	496	Riverside Ct	E Riverside Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

4087 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
146

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

4088 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 12.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.9
Right Flare	(%)	9.1
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4089 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	7.4
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.1 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Riverside Ct** ***and*** **E Riverside Dr** **$10,750.00**

Total Costs for Curb Ramps along : **Riverside Ct** **$10,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1221	Riverside Dr	Sierra St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1162 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**10.4**
Right Flare	(%)	9.6
Gutter Slope	(%)	**13.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1163 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	50.0
Slope of the Ramp / Pad	(%)	**13.4**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.8
Right Flare	(%)	**13.2**
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1161 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverside Dr and Sierra St **$13,000.00**

Total Costs for Curb Ramps along : Riverside Dr **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1164	Riverview Dr	Aram Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

894 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Curb Ramp Required

892 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

893 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr *and* Aram Ave **$21,000.00**

NE Perpendicular

699 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.9
Right Flare	(%)	9.7
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

700 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.5
Right Flare	(%)	**13.0**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

698 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.3
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

701 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.7**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 2.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr *and* Imperial Dr $23,250.00

N Curb Ramp Required

636 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

637 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
37

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.9
Right Flare	(%)	8.8
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

638 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
52

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.7**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	**3.7**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr and Mainberry Dr **$21,000.00**

N Curb Ramp Required

1581 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1582 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.8
Right Flare	(%)	8.5
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1583 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.9**
Right Flare	(%)	**15.3**
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr and Monocott Dr **$20,000.00**

NE Perpendicular

1589 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	68.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**14.3**
Right Flare	(%)	6.5
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.6 5.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1588 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	**10.5**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1590 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**6.0**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	6.3
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.7 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1587 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.9
Right Flare	(%)	7.4
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr *and* N Granada Dr **$27,000.00**

N Curb Ramp Required

621 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

623 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
41

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.3
Right Flare	(%)	**10.2**
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

622 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**14.2**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Riverview Dr and Shannon Ave **$21,000.00**

N No Sidewalk, Curb Ramp Not Required

1403 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1402 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 10.9%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	73.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.4
Right Flare	(%)	10.0
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1404 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
29

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.2
Right Flare	(%)	5.1
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	**8.9**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Riverview Dr** ***and*** **Summer Set Ln** **$13,500.00**

E Curb Ramp Required

738 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

737 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.1
Right Flare	(%)	**12.3**
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

739 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	**11.7**
Right Flare	(%)	9.0
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Riverview Dr** ***and*** **Westberry Blvd** **$20,500.00**

N Curb Ramp Required

1584 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1585 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 14.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**45.0**
Slope of the Ramp / Pad	(%)	**14.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**14.5**
Right Flare	(%)	**12.5**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1586 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**42.0**
Slope of the Ramp / Pad	(%)	**13.1**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	66.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**13.4**
Right Flare	(%)	9.3
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Riverview Dr** ***and*** **Wolftrap Ct** **$20,000.00**

Total Costs for Curb Ramps along : **Riverview Dr** **$187,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	515	Riverwalk Dr	N B St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

3834 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3836 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.0
Right Flare	(%)	7.7
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3835 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.3**
Right Flare	(%)	6.6
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Riverwalk Dr and N B St **$21,000.00**

Total Costs for Curb Ramps along : Riverwalk Dr **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	607	Robinwood Way	Kern St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — No Sidewalk, Curb Ramp Not Required

2228 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Perpendicular

2227 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.5
Right Flare	(%)	3.5
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Robinwood Way** ***and*** **Kern St** **$6,500.00**

Total Costs for Curb Ramps along : **Robinwood Way** **$6,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	207	Rogers St	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Parallel**

4185 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.1%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
78

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	67.0	72.0
Slope of the Ramp / Pad	(%)	**9.2**	7.5
X Slope of the Ramp / Pad	(%)	**5.1**	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**5.5**	0.8
Top Landing X Slope	(%)	**6.1**	**2.1**

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	**3.4**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

4187 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 8.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	81.0	77.0
Slope of the Ramp / Pad	(%)	7.4	**8.5**
X Slope of the Ramp / Pad	(%)	1.2	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.9
Top Landing X Slope	(%)	0.3	1.9

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	2.0
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

4186 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rogers St and E Cleveland Ave **$21,000.00**

NE Combination

4033 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* Left: 40.0" Right: 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**40.0**	**40.0**
Length of Ramp / Pad	(in)	132.0	130.0
Slope of the Ramp / Pad	(%)	6.6	2.8
X Slope of the Ramp / Pad	(%)	1.8	**3.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.9
Top Landing X Slope	(%)	**4.2**	0.6
Length of Combo. Ramp	(in)	55.0	
Combo. Ramp Slope	(%)	14.8	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	**39.0**	
Bottom Landing Slope	(in)	**3.6**	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	**12.6**	
Right Flare	(%)	**12.5**	
Gutter Slope	(%)	**11.0**	
Gutter XSlope	(%)	**2.8**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	4.8	3.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

4030 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

4032 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 4.1% Right: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	42.0	41.0
Length of Ramp / Pad	(in)	144.0	137.0
Slope of the Ramp / Pad	(%)	4.4	4.4
X Slope of the Ramp / Pad	(%)	4.1	2.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.2
Top Landing X Slope	(%)	0.7	1.0
Length of Combo. Ramp	(in)	52.0	
Combo. Ramp Slope	(%)	10.0	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.2	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	8.8	
Right Flare	(%)	9.9	
Gutter Slope	(%)	10.8	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

4031 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	114.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	37.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.4
Left Flare	(%)	13.1
Right Flare	(%)	7.8
Gutter Slope	(%)	7.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	9.0
Street Grade (Left / Right)	(%)	2.2 0.2.
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rogers St and Green Way **$21,000.00**

NE No Sidewalk, Curb Ramp Not Required

2258 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2259 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Curb Ramp Required

2257 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2260 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Rogers St** ***and*** **W Sherwood Way** **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

2249 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2246 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2248 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2247 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Rogers St *and* Wessmith Way** **$0.00**

***Total Costs for Curb Ramps along :* Rogers St** **$49,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	889	Roosevelt Ave	14Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW **Perpendicular**

3026 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.8% Right: 12.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
69

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.8**
Right Flare	(%)	**12.7**
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3028 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	106.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.7
Right Flare	(%)	8.0
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3027 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
62

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.6
Right Flare	(%)	7.8
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Roosevelt Ave and 14Th St **$9,250.00**

NE Perpendicular

3355 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.8
Right Flare	(%)	7.4
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3354 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
54

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.9**
Right Flare	(%)	6.6
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.3 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Parallel

3353 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.2% Right: 3.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	61.0
Length of Ramp / Pad	(in)	120.0	105.0
Slope of the Ramp / Pad	(%)	7.2	8.0
X Slope of the Ramp / Pad	(%)	**3.2**	**3.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.3
Top Landing X Slope	(%)	**2.6**	**3.1**

Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	**12.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	0.2	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Roosevelt Ave *and* Lake St **$16,750.00**

NE Perpendicular

3030 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.8
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NNW Perpendicular

3029 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**15.2**
Right Flare	(%)	**13.0**
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

3032 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

WNW Perpendicular

3031 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.6
Right Flare	(%)	**14.0**
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Roosevelt Ave *and* S C St **$19,500.00**

NW Curb Ramp Required

3342 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3340 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
66

Width of Ramp / Pad	(in)	81.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.0
Right Flare	(%)	5.4
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3341 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.8
Right Flare	(%)	4.4
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**

Street Grade (Left / Right)	(%)	0.8 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Roosevelt Ave and Sunrise Ave **$13,250.00**

Total Costs for Curb Ramps along : **Roosevelt Ave** **$58,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1248	Rose St	Washington St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

3276 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

3274 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3275 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rose St and Washington St **$0.00**

Total Costs for Curb Ramps along : Rose St **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	857	Rosewood Cr	Double Tree Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1502 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 5.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**5.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	**16.1**
Right Flare	(%)	N/A
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NNE Perpendicular

1501 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	**4.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.1

Left Flare	(%)	N/A
Right Flare	(%)	**13.9**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1509 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	53.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	7.0
Right Flare	(%)	8.6
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1504 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**8.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**3.9**

Left Flare	(%)	N/A
Right Flare	(%)	**15.4**
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1510 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.7**
Right Flare	(%)	7.6
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SSE Perpendicular

1505 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	**10.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.6**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	**15.0**
Right Flare	(%)	7.6
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1503 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

1511 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Rosewood Cr** ***and*** **Double Tree Way** **$53,000.00**

Total Costs for Curb Ramps along : **Rosewood Cr** **$53,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1451	Rotan Ave	Fifth St

NE Combination

529 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 33.0" Right: 33.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
85

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**33.0**	**33.0**
Length of Ramp / Pad	(in)	**28.0**	**39.0**
Slope of the Ramp / Pad	(%)	8.0	7.8
X Slope of the Ramp / Pad	(%)	2.0	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.3
Top Landing X Slope	(%)	**2.3**	1.4
Length of Combo. Ramp	(in)	51.0	
Combo. Ramp Slope	(%)	6.5	
Combo. Ramp X Slope	(%)	0.9	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.2	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	7.4	
Right Flare	(%)	**11.2**	
Gutter Slope	(%)	**14.8**	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.4	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Curb Ramp Required

526 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

528 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 39.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**39.0**	N/A
Length of Ramp / Pad	(in)	74.0	N/A
Slope of the Ramp / Pad	(%)	7.6	N/A
X Slope of the Ramp / Pad	(%)	0.6	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	**2.2**	N/A
Length of Combo. Ramp	(in)	52.0	
Combo. Ramp Slope	(%)	7.2	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**10.6**	
Right Flare	(%)	**10.7**	
Gutter Slope	(%)	**15.2**	
Gutter XSlope	(%)	1.6	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	6.0	
Street Grade (Left / Right)	(%)	1.2	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

527 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Right: 39.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
75

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	**39.0**
Length of Ramp / Pad	(in)	N/A	58.0
Slope of the Ramp / Pad	(%)	N/A	4.5
X Slope of the Ramp / Pad	(%)	N/A	**2.2**
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	0.6
Top Landing X Slope	(%)	N/A	1.4
Length of Combo. Ramp	(in)	51.5	
Combo. Ramp Slope	(%)	10.3	
Combo. Ramp X Slope	(%)	1.8	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	0.9	
Bottom Landing X Slope	(in)	1.5	
Left Flare	(%)	**10.2**	
Right Flare	(%)	10.0	
Gutter Slope	(%)	**16.3**	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Rotan Ave and Fifth St **$28,000.00**

NE No Sidewalk, Curb Ramp Not Required

459 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

458 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

460 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

461 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Rotan Ave *and* Third St** **$0.00**

***Total Costs for Curb Ramps along :* Rotan Ave** **$28,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	702	Royal Dr	University Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

705 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

706 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.5

Left Flare	(%)	8.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

704 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.5
Right Flare	(%)	9.2
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Royal Dr and University Ave **$20,500.00**

Total Costs for Curb Ramps along : Royal Dr **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1546	Rubicon Ave	Ivy Glen Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Parallel

2791 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Left: 8.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	68.0
Length of Ramp / Pad	(in)	70.0	75.0
Slope of the Ramp / Pad	(%)	**8.5**	4.6
X Slope of the Ramp / Pad	(%)	1.2	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.5
Top Landing X Slope	(%)	1.0	0.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW **Under Construction**

2792 Existing Curb Ramp

- *As-Built Description:*

  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
40

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Rubicon Ave** ***and*** **Ivy Glen Dr** **$7,000.00**

Total Costs for Curb Ramps along : **Rubicon Ave** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	551	Running Brook Dr	San Pietro Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2329 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
4

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.0
Right Flare	(%)	4.2
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2328 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

0

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.3
Right Flare	(%)	6.0
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.3	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2330 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority

100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Running Brook Dr** ***and*** **San Pietro Dr** **$13,500.00**

Total Costs for Curb Ramps along : **Running Brook Dr** **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1336	Rush St	Austin Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1252 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

1251 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1253 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Curb Ramp Required

1250 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Rush St** ***and*** **Austin Ave** **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

1248 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1249 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.4%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.2
Right Flare	(%)	6.7
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	4.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

1247 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1246 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Rush St** ***and*** **Dellavalle Ave** **$6,500.00**

NE Perpendicular

1321 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 14.8% Right: 15.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
64

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**14.8**
Right Flare	(%)	**15.9**
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1322 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
47

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.5
Right Flare	(%)	8.0
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1324 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**14.5**
Right Flare	(%)	8.9
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1323 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	54.5
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.8
Right Flare	(%)	6.3
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Rush St and N D St **$16,000.00**

Total Costs for Curb Ramps along : Rush St	**$29,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1149	S A St	10Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

4294 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
164

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Perpendicular

4288 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 40.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	**40.0**
Length of Ramp / Pad	(in)	104.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.4
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NNE Perpendicular

4287 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 44.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	0.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	3.8
Right Flare	(%)	9.1
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NNW Perpendicular

4286 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 39.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	**39.0**
Length of Ramp / Pad	(in)	110.0
Slope of the Ramp / Pad	(%)	2.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.1
Right Flare	(%)	6.6
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Parallel

4285 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.5% Right: 3.1%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
69

		LEFT	RIGHT
Width of Ramp / Pad	(in)	84.0	58.0
Length of Ramp / Pad	(in)	56.0	67.0
Slope of the Ramp / Pad	(%)	5.9	7.0
X Slope of the Ramp / Pad	(%)	**2.5**	**3.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	1.8
Top Landing X Slope	(%)	**2.2**	1.8

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	1.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4293 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
81

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	112.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.4
Right Flare	(%)	8.0
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	8.3	7.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

4283 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.5**
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Parallel

4284 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 9.0%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
58

		LEFT	RIGHT
Width of Ramp / Pad	(in)	58.0	58.0
Length of Ramp / Pad	(in)	77.0	77.0
Slope of the Ramp / Pad	(%)	**9.0**	7.8
X Slope of the Ramp / Pad	(%)	1.9	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	1.5
Top Landing X Slope	(%)	1.0	1.7

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.1**
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4292 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S A St and 10Th St **$62,000.00**

E Combination

4455 Ramp Slope

- *As-Built Description:*
  Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.
- *As-is* Left: 9.7% Right: 8.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**46.0**	**47.0**
Length of Ramp / Pad	(in)	**33.0**	**33.0**
Slope of the Ramp / Pad	(%)	**9.7**	**8.9**
X Slope of the Ramp / Pad	(%)	1.5	**2.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.7
Top Landing X Slope	(%)	2.0	1.9

Length of Combo. Ramp	(in)	74.0
Combo. Ramp Slope	(%)	12.2
Combo. Ramp X Slope	(%)	1.7

Bottom Landing Length	(in)	56.0
Bottom Landing Slope	(in)	**2.8**
Bottom Landing X Slope	(in)	0.9
Left Flare	(%)	**10.1**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

4454 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
65

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	54.0
Length of Ramp / Pad	(in)	86.0	68.0
Slope of the Ramp / Pad	(%)	6.9	4.0
X Slope of the Ramp / Pad	(%)	0.7	**2.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	0.1
Top Landing X Slope	(%)	0.7	2.0
Length of Combo. Ramp	(in)	85.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	1.1	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	**2.6**	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	**10.8**	
Right Flare	(%)	**10.9**	
Gutter Slope	(%)	**6.9**	
Gutter XSlope	(%)	0.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.1	2.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

4456 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
77

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	59.0	54.0
Slope of the Ramp / Pad	(%)	6.6	7.2
X Slope of the Ramp / Pad	(%)	1.3	**3.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	2.7
Top Landing X Slope	(%)	**2.6**	**3.8**
Length of Combo. Ramp	(in)	66.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	1.5	
Bottom Landing Length	(in)	54.0	
Bottom Landing Slope	(in)	**3.5**	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	9.7	
Right Flare	(%)	7.4	
Gutter Slope	(%)	**12.8**	
Gutter XSlope	(%)	0.6	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.3	3.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4453 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.7
Right Flare	(%)	8.8
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.0 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S A St and 6Th St **$24,250.00**

E No Sidewalk, Curb Ramp Not Required

4319 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
55

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4320 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
108

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	108.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	**3.8**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**14.7**
Right Flare	(%)	**13.0**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4322 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.0
Right Flare	(%)	9.3
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	3.5 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Combination

4321 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
76

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	55.0
Length of Ramp / Pad	(in)	56.0	**43.0**
Slope of the Ramp / Pad	(%)	1.5	7.5
X Slope of the Ramp / Pad	(%)	1.5	**3.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.4
Top Landing X Slope	(%)	0.1	0.4
Length of Combo. Ramp	(in)	63.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	49.0	
Bottom Landing Slope	(in)	**5.8**	
Bottom Landing X Slope	(in)	**3.7**	
Left Flare	(%)	8.1	
Right Flare	(%)	8.8	
Gutter Slope	(%)	**8.0**	
Gutter XSlope	(%)	1.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.3	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S A St and Clinton St **$17,000.00**

NE Perpendicular

3429 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 5.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
77

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	**3.6**
Left Flare	(%)	5.7
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	2.8 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3430 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.0
Right Flare	(%)	8.0
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3428 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**12.5**
Right Flare	(%)	**11.8**
Gutter Slope	(%)	**13.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

3431 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	83.0
Length of Ramp / Pad	(in)	122.0	104.0
Slope of the Ramp / Pad	(%)	4.6	7.6
X Slope of the Ramp / Pad	(%)	1.7	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	0.4
Top Landing X Slope	(%)	**2.3**	1.1

Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**7.0**

Street Grade (Left / Right)	(%)	1.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S A St and Roosevelt Ave **$19,750.00**

NE Parallel

4289 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1% Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	123.0	114.0
Length of Ramp / Pad	(in)	48.0	86.0
Slope of the Ramp / Pad	(%)	6.2	7.2
X Slope of the Ramp / Pad	(%)	1.4	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	0.8
Top Landing X Slope	(%)	**2.1**	**2.4**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4290 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.1
Right Flare	(%)	9.4
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

4291 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 3.5%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	92.0	89.0
Slope of the Ramp / Pad	(%)	8.0	7.1
X Slope of the Ramp / Pad	(%)	**3.5**	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	**3.7**
Top Landing X Slope	(%)	**3.7**	1.4

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**4.0**
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.3 N/A
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S A St and Sunrise Ave **$17,500.00**

Total Costs for Curb Ramps along : S A St **$140,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1438	S B St	14Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3025 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.2
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3024 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.7
Right Flare	(%)	6.1
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3023 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 12.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
63

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**12.6**
Right Flare	(%)	9.8
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 N/A
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S B St and 14Th St **$16,250.00**

E Perpendicular

4329 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
90

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	57.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.3**
Right Flare	(%)	6.1
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4330 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 29.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
88

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**29.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.1
Right Flare	(%)	**12.6**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4328 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
102

Width of Ramp / Pad	(in)	**39.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.4**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4327 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	55.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**13.7**
Right Flare	(%)	**11.9**
Gutter Slope	(%)	**13.2**
Gutter XSlope	(%)	**3.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S B St and 9Th St **$26,500.00**

Total Costs for Curb Ramps along : S B St **$42,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1300**	**S C St**	**10Th St**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3674 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.7
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.3	4.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3673 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**17.3**
Right Flare	(%)	**11.8**
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3675 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.9**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.4
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3672 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
74

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.5
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S C St and 10Th St **$16,250.00**

E Perpendicular

3611 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
98

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**21.1**
Right Flare	(%)	**14.2**
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3612 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.6
Right Flare	(%)	4.1
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3610 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
59

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.7
Right Flare	(%)	7.4
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3609 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**7.8**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.5
Right Flare	(%)	9.0
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S C St and 11Th St **$22,000.00**

E Perpendicular

3067 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.8
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**17.7**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	2.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3066 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

- *Notes:* Large obstruction on ramp

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	6.2
Right Flare	(%)	6.1
Gutter Slope	(%)	**14.9**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3064 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.2
Right Flare	(%)	6.1
Gutter Slope	(%)	**17.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3065 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.3
Right Flare	(%)	**11.3**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S C St *and* 14Th St **$26,000.00**

E Perpendicular

3658 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.2**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	9.5
Right Flare	(%)	8.9
Gutter Slope	(%)	**17.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.2 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3655 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 15.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.1
Right Flare	(%)	8.0
Gutter Slope	(%)	**15.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.3 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

3657 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.7%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	118.0	137.0
Length of Ramp / Pad	(in)	120.0	111.0
Slope of the Ramp / Pad	(%)	3.4	2.5
X Slope of the Ramp / Pad	(%)	0.2	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	1.8
Top Landing X Slope	(%)	**2.7**	1.9

Length of Combo. Ramp	(in)	69.0
Combo. Ramp Slope	(%)	7.6
Combo. Ramp X Slope	(%)	0.8

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(in)	1.9
Bottom Landing X Slope	(in)	0.2
Left Flare	(%)	8.4
Right Flare	(%)	7.0
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3656 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
95

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**14.4**
Right Flare	(%)	**15.2**
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S C St and 6Th St **$19,500.00**

E Curb Ramp Required

3661 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
150

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3660 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
65

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.9
Right Flare	(%)	6.5
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

3659 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.6
Right Flare	(%)	5.6
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S C St and 7Th St **$13,500.00**

E Perpendicular

3670 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.5
Right Flare	(%)	8.8
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3669 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.2**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.4**
Right Flare	(%)	7.9
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3671 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
82

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.3
Right Flare	(%)	5.9
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3668 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
84

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.5
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S C St and 9Th St **$26,000.00**

E Curb Ramp Required

3667 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
155

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3666 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 6.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
79

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.6
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

3665 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
75

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.4
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S C St and Clinton St **$13,500.00**

Total Costs for Curb Ramps along : S C St **$136,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1334	S D St	13Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3056 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
79

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.0
Right Flare	(%)	6.3
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3055 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**11.5**
Right Flare	(%)	6.4
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3053 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.4
Right Flare	(%)	9.2
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.8 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3054 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.9
Right Flare	(%)	8.5
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S D St and 13Th St **$26,000.00**

E Perpendicular

3060 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.3
Right Flare	(%)	6.3
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3057 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**13.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.9**
Right Flare	(%)	6.9
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3059 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3058 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 42.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	42.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	9.3
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.5
Right Flare	(%)	10.8
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.5
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.1 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S D St and 14Th St $16,250.00

E Perpendicular

3630 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
94

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	11.6
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	3.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	10.5
Right Flare	(%)	8.9
Gutter Slope	(%)	11.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.75
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.6 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Combination

3631 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
79

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	104.0	102.0
Slope of the Ramp / Pad	(%)	4.4	4.5
X Slope of the Ramp / Pad	(%)	0.9	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.0
Top Landing X Slope	(%)	0.9	**2.3**
Length of Combo. Ramp	(in)	63.0	
Combo. Ramp Slope	(%)	9.2	
Combo. Ramp X Slope	(%)	1.0	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	**2.2**	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	**9.9**	
Right Flare	(%)	0.2	
Gutter Slope	(%)	**0.25**	
Gutter XSlope	(%)	**Not Contrasting**	
Gutter Lip	(in)	8.0	
Truncated Domes	(y/n)		
Dome Setback	(in)		
Street Grade (Left / Right)	(%)	0.2	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3629 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
92

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**13.7**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.0
Left Flare	(%)	**13.9**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**14.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0
Street Grade (Left / Right)	(%)	1.3 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

3632 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**10.4**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES

Street Grade (Left / Right)	(%)	0.1 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S D St and 9Th St $26,500.00

E Combination

3634 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	48.0
Length of Ramp / Pad	(in)	62.0	86.0
Slope of the Ramp / Pad	(%)	**8.4**	5.4
X Slope of the Ramp / Pad	(%)	**2.1**	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.3
Top Landing X Slope	(%)	0.7	1.6

Length of Combo. Ramp	(in)	51.0
Combo. Ramp Slope	(%)	10.8
Combo. Ramp X Slope	(%)	0.5

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	**2.2**
Bottom Landing X Slope	(in)	1.1
Left Flare	(%)	**10.4**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.3 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3635 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.7
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

3633 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
85

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	N/A
Length of Ramp / Pad	(in)	68.0	N/A
Slope of the Ramp / Pad	(%)	5.6	N/A
X Slope of the Ramp / Pad	(%)	**3.8**	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.5	N/A
Top Landing X Slope	(%)	**3.2**	N/A

Length of Combo. Ramp	(in)	49.0
Combo. Ramp Slope	(%)	10.5
Combo. Ramp X Slope	(%)	1.2

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	**2.6**
Bottom Landing X Slope	(in)	0.4
Left Flare	(%)	7.8
Right Flare	(%)	9.8
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.8 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3636 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
60

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S D St and Clinton St $20,500.00

NE Perpendicular

3045 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.1
Right Flare	(%)	9.6
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.6	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

3046 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3047 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S D St and Olive Ave **$13,500.00**

Total Costs for Curb Ramps along : S D St **$102,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	471	S Double Tree Way	Gamay Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2588 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 10.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.4
Right Flare	(%)	4.0
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2587 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.9
Right Flare	(%)	6.2
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2586 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Double Tree Way and Gamay Ave **$8,000.00**

NE Perpendicular

1899 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.1"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
5

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.2
Right Flare	(%)	8.1
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1900 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	6.5
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

1898 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **S Double Tree Way** ***and*** **Maple St** **$12,750.00**

N **Curb Ramp Required**

1901 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1902 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.9
Right Flare	(%)	7.6
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1903 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	5.7
Right Flare	(%)	9.5
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **S Double Tree Way** ***and*** **Pluma St** **$16,500.00**

NE Perpendicular

2570 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
19

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.4
Right Flare	(%)	5.4
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2572 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.3
Right Flare	(%)	6.6
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6	1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE **No Sidewalk, Curb Ramp Not Required**

2571 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **S Double Tree Way** ***and*** **W Almond Ave** **$13,000.00**

Total Costs for Curb Ramps along : **S Double Tree Way** **$50,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1371	S E St	11Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

4400 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

4399 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4401 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S E St and 11Th St $0.00

E No Sidewalk, Curb Ramp Not Required

4403 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

4402 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4404 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S E St and 12Th St **$0.00**

E No Sidewalk, Curb Ramp Not Required

4406 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

4405 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

4407 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S E St *and* 13Th St **$0.00**

E Perpendicular

4255 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
97

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 13.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**13.8**
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**14.7**
Right Flare	(%)	**16.7**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.8**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

4258 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.4
Right Flare	(%)	6.3
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	1.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4256 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 4.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**12.9**
X Slope of the Ramp / Pad	(%)	**4.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	**3.8**

Left Flare	(%)	**15.5**
Right Flare	(%)	9.6
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	4.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

4257 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.3
Right Flare	(%)	9.5
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S E St and 6Th St $26,500.00

E Parallel

4254 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
53

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**46.0**	60.0
Length of Ramp / Pad	(in)	132.0	144.0
Slope of the Ramp / Pad	(%)	7.5	7.4
X Slope of the Ramp / Pad	(%)	1.2	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	2.5
Top Landing X Slope	(%)	**5.3**	2.0

Bottom Landing Length	(in)	72.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**16.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	1.1 6.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

4252 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
150

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

4253 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
150

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S E St and 7Th St **$21,000.00**

E No Sidewalk, Curb Ramp Not Required

4251 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

N No Sidewalk, Curb Ramp Not Required

4249 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

W **No Sidewalk, Curb Ramp Not Required**

4250 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : S E St and Clinton St **$0.00**

Total Costs for Curb Ramps along : S E St **$47,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1310	S G St	11Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3081 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.9
Right Flare	(%)	**12.5**
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3080 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 5.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**11.3**
Right Flare	(%)	7.9
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3082 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.1**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**14.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3079 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	59.5
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.3
Right Flare	(%)	9.5
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S G St and 11Th St **$22,750.00**

NE No Sidewalk, Curb Ramp Not Required

4230 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

4231 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4229 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.4
Right Flare	(%)	8.3
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

4228 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
70

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	105.0
Slope of the Ramp / Pad	(%)	4.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.2
Right Flare	(%)	8.7
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S G St and E Yosemite Ave $14,000.00

E Perpendicular

1124 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	108.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.2
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 3.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1125 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 29.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
110

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**29.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**14.6**
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	**7.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1123 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
85

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.4
Right Flare	(%)	**15.0**
Gutter Slope	(%)	**14.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1122 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
50

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S G St and Eighth St $16,750.00

E Perpendicular

1121 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.5%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**13.2**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

1119 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.0
Right Flare	(%)	6.9
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.9 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Curb Ramp Required

1118 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
148

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

W Perpendicular

1120 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	104.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	8.1
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.5 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S G St and Seventh St **$27,000.00**

Total Costs for Curb Ramps along : S G St **$80,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1216	S Gateway Dr	10Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N Curb Ramp Required

4238 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Combination

4240 Ramp Slope

- *As-Built Description:*
  Running slope of existing combination ramp run is less than 5% or greater than 8.3%.
- *As-is* 9.9%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
66

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	61.0	**21.0**
Slope of the Ramp / Pad	(%)	4.8	7.6
X Slope of the Ramp / Pad	(%)	0.1	0.6
Top Landing Length	(in)	48.0	**0.0**
Top Landing Slope	(%)	1.5	N/A
Top Landing X Slope	(%)	0.1	N/A
Length of Combo. Ramp	(in)	62.0	
Combo. Ramp Slope	(%)	9.9	
Combo. Ramp X Slope	(%)	**2.2**	

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	1.9
Bottom Landing X Slope	(in)	1.1
Left Flare	(%)	**10.6**
Right Flare	(%)	8.1
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	1.5	1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

4239 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.8**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.7
Right Flare	(%)	8.8
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr *and* 10Th St **$17,250.00**

E Perpendicular

4243 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
98

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**12.2**
Right Flare	(%)	7.9
Gutter Slope	(%)	**17.9**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4242 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
82

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**12.1**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4244 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**6.1**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**10.1**
Right Flare	(%)	7.9
Gutter Slope	(%)	**18.7**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 4.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4241 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	78.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.2
Right Flare	(%)	**14.0**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 3.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr *and* 11Th St **$22,750.00**

NE Curb Ramp Required

3084 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3083 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.6
Right Flare	(%)	6.1
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3085 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.5**
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr and 12Th St **$20,000.00**

W Driveway

4408 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr and 846 S Gateway Dr $0.00

E Curb Ramp Required

4265 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
164

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Both

N Curb Ramp Required

4263 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
160

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

4264 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 7.0%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
72

Width of Ramp / Pad	(in)	104.0
Length of Ramp / Pad	(in)	139.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Gateway Dr and E 9Th St **$17,000.00**

N Curb Ramp Required

1128 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
148

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1126 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	9.5
Right Flare	(%)	3.6
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1127 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
148

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr and Eighth St $20,500.00

NE Perpendicular

3068 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
53

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.6**
Right Flare	(%)	9.8
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3069 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 14.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	134.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**14.0**
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.6**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3071 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3070 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.6
Right Flare	(%)	5.0
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr *and* Olive Ave **$16,750.00**

NW Curb Ramp Required

4236 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
160

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

4237 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.9% Right: 12.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
70

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	111.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.9**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	**6.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

4235 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
148

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Gateway Dr and S Madera Ave **$17,250.00**

NE Curb Ramp Required

1115 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
158

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1116 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
158

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

1117 Ramp Landing

- *As-Built Description:*

  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
82

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	9.0
Right Flare	(%)	8.9
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	3.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Gateway Dr and Seventh St **$17,250.00**

Total Costs for Curb Ramps along : S Gateway Dr **$148,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	766	S I St	Eighth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Combination**

166 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.9%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
83

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	58.0	70.0
Slope of the Ramp / Pad	(%)	7.7	8.2
X Slope of the Ramp / Pad	(%)	0.6	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.0	1.9
Top Landing X Slope	(%)	**2.9**	0.2
Length of Combo. Ramp	(in)	76.0	
Combo. Ramp Slope	(%)	5.4	
Combo. Ramp X Slope	(%)	1.0	
Bottom Landing Length	(in)	**28.0**	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	1.8	
Left Flare	(%)	9.6	
Right Flare	(%)	9.5	
Gutter Slope	(%)	**10.2**	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	**0.1**	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.2	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

165 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
107

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**13.7**
X Slope of the Ramp / Pad	(%)	**3.6**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**18.1**
Right Flare	(%)	**19.6**
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

167 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
95

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**12.1**
Right Flare	(%)	**13.4**
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Combination

168 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	56.0
Length of Ramp / Pad	(in)	68.0	68.0
Slope of the Ramp / Pad	(%)	4.2	4.2
X Slope of the Ramp / Pad	(%)	0.7	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.9
Top Landing X Slope	(%)	1.4	1.2
Length of Combo. Ramp	(in)	49.0	
Combo. Ramp Slope	(%)	9.1	
Combo. Ramp X Slope	(%)	1.0	
Bottom Landing Length	(in)	**27.0**	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	**10.6**	
Right Flare	(%)	**13.3**	
Gutter Slope	(%)	**9.7**	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S I St and Eighth St **$24,500.00**

E Perpendicular

4 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 11.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	**47.5**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**11.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.5
Left Flare	(%)	**10.2**
Right Flare	(%)	7.7
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	1.2 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

3 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
90

Width of Ramp / Pad	(in)	**45.0**
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.6
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

1 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.2
Right Flare	(%)	5.8
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

2 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 1.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
105

Width of Ramp / Pad	(in)	**45.5**
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**1.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**11.6**
Right Flare	(%)	9.9
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**1.8**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S I St *and* Ninth St **$24,000.00**

E Perpendicular

162 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
79

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**6.8**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.2
Right Flare	(%)	8.6
Gutter Slope	(%)	**15.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	4.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

161 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.9
Right Flare	(%)	8.7
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

163 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	57.0
Length of Ramp / Pad	(in)	70.0	52.0
Slope of the Ramp / Pad	(%)	3.5	2.3
X Slope of the Ramp / Pad	(%)	0.9	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.8
Top Landing X Slope	(%)	**4.0**	**2.1**

Length of Combo. Ramp	(in)	49.0
Combo. Ramp Slope	(%)	10.0
Combo. Ramp X Slope	(%)	0.6

Bottom Landing Length	(in)	**38.0**
Bottom Landing Slope	(in)	0.8
Bottom Landing X Slope	(in)	1.2
Left Flare	(%)	8.6
Right Flare	(%)	7.8
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

164 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**11.7**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 2.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S I St and Seventh St **$27,500.00**

Total Costs for Curb Ramps along : S I St **$76,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1127	S J St	Ninth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Perpendicular

136 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 40.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
94

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**14.6**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**12.2**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

134 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

135 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.8

Left Flare	(%)	**11.5**
Right Flare	(%)	9.5
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S J St and Ninth St **$21,000.00**

Total Costs for Curb Ramps along : S J St **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1241	S L St	Eighth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

120 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 20.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
103

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**15.5**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	**20.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**23.8**
Right Flare	(%)	**24.5**
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

122 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
91

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**14.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	**17.5**
Right Flare	(%)	**22.7**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

121 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
94

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**24.0**
Right Flare	(%)	**21.0**
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S L St and Eighth St **$21,000.00**

NE Perpendicular

118 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	7.7
Gutter Slope	(%)	**14.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

117 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**12.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	52.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**25.8**
Right Flare	(%)	**20.4**
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 N/A
Stop/Yield Control:	(y/n)	Yes-Yield Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

119 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.8**
Right Flare	(%)	**11.9**
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.8	3.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

116 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
87

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**20.4**
Right Flare	(%)	**20.0**
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8	1.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S L St and Seventh St **$27,500.00**

NE Perpendicular

89 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
95

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**14.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**21.8**
Right Flare	(%)	**20.0**
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

88 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
100

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**16.8**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**23.4**
Right Flare	(%)	**18.5**
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

90 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 27.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
93

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**14.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**27.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**22.9**
Right Flare	(%)	**18.4**
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

91 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 19.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
86

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**19.3**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**29.6**
Right Flare	(%)	**31.7**
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S L St and Sixth St **$27,500.00**

NE Combination

100 Compliant Curb Ramp

• *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	102.0	970
Slope of the Ramp / Pad	(%)	3.0	4.4
X Slope of the Ramp / Pad	(%)	0.3	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.0	1.8
Top Landing X Slope	(%)	1.2	1.6
Length of Combo. Ramp	(in)	66.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	0.8	
Bottom Landing Length	(in)	54.0	
Bottom Landing Slope	(in)	0.7	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	9.3	
Right Flare	(%)	8.3	
Gutter Slope	(%)	4.2	
Gutter XSlope	(%)	0.8	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

103 Ramp Landing

• *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

• *As-is* 40.0"

• *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority

71

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	60.0
Length of Ramp / Pad	(in)	67.0	90.0
Slope of the Ramp / Pad	(%)	2.1	1.5
X Slope of the Ramp / Pad	(%)	1.6	0.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.6**	0.2
Top Landing X Slope	(%)	1.6	**2.1**
Length of Combo. Ramp	(in)	106.0	
Combo. Ramp Slope	(%)	**7.8**	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	**40.0**	
Bottom Landing Slope	(in)	1.3	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	**10.8**	
Right Flare	(%)	**11.8**	
Gutter Slope	(%)	**8.2**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.4	2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

101 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
60

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	54.0
Length of Ramp / Pad	(in)	125.0	148.0
Slope of the Ramp / Pad	(%)	3.9	2.7
X Slope of the Ramp / Pad	(%)	1.6	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.9
Top Landing X Slope	(%)	1.4	1.8
Length of Combo. Ramp	(in)	67.0	
Combo. Ramp Slope	(%)	7.1	
Combo. Ramp X Slope	(%)	1.3	
Bottom Landing Length	(in)	66.0	
Bottom Landing Slope	(in)	0.8	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	7.9	
Right Flare	(%)	9.6	
Gutter Slope	(%)	2.8	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.5	2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

102 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
69

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.7%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	174.0	174.0
Slope of the Ramp / Pad	(%)	4.7	4.5
X Slope of the Ramp / Pad	(%)	1.4	**2.7**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.0	1.0
Top Landing X Slope	(%)	**3.6**	1.2
Length of Combo. Ramp	(in)	77.0	
Combo. Ramp Slope	(%)	6.9	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	53.0	
Bottom Landing Slope	(in)	1.5	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	9.1	
Right Flare	(%)	5.6	
Gutter Slope	(%)	0.6	
Gutter XSlope	(%)	**7.6**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.8	3.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S L St and W Yosemite Ave **$14,000.00**

Total Costs for Curb Ramps along : S L St **$90,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1355	S Lake St	11Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4275 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
94

Width of Ramp / Pad	(in)	80.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.7
Right Flare	(%)	8.5
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

4274 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
88

Width of Ramp / Pad	(in)	**42.0**
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.6
Right Flare	(%)	8.0
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4273 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.0
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Lake St and 11Th St **$20,500.00**

Total Costs for Curb Ramps along : **S Lake St** **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	442	S Madera Ave	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

15 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
69

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.7
Right Flare	(%)	9.1
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NE Parallel

4224 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
50

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 8.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	69.0	71.0
Length of Ramp / Pad	(in)	79.0	79.0
Slope of the Ramp / Pad	(%)	5.4	6.7
X Slope of the Ramp / Pad	(%)	1.8	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.9	0.5
Top Landing X Slope	(%)	1.1	2.0

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.0 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4227 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.7
Right Flare	(%)	9.5
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.5 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

14 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 42.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	68.0
Length of Ramp / Pad	(in)	88.0	89.0
Slope of the Ramp / Pad	(%)	4.0	4.7
X Slope of the Ramp / Pad	(%)	2.0	1.8
Top Landing Length	(in)	**42.0**	48.0
Top Landing Slope	(%)	0.3	0.2
Top Landing X Slope	(%)	0.7	1.4

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	3.0 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4225 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
72

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.7
Right Flare	(%)	7.6
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.5 2.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4226 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.7**
Right Flare	(%)	8.6
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Madera Ave and **$32,000.00**

NW Perpendicular

11 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	48.5
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	4.2
Right Flare	(%)	6.4
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.3 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SSW Perpendicular

13 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.7
Right Flare	(%)	7.8
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

WSW Perpendicular

12 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
79

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.3
Right Flare	(%)	9.3
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.4 1.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S Madera Ave and Olive Ave **$21,000.00**

Total Costs for Curb Ramps along : **S Madera Ave** **$53,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	804	S N St	Seventh St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

51 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Perpendicular

50 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 43.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
110

Width of Ramp / Pad	(in)	**39.0**
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**15.3**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**18.1**
Right Flare	(%)	**21.5**
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.1	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

52 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
103

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**14.4**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**15.7**
Right Flare	(%)	**18.1**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S N St and Seventh St $21,000.00

NE Perpendicular

83 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 41.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
96

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**15.4**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**41.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**20.3**
Right Flare	(%)	**16.8**
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

84 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
96

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**17.6**
Right Flare	(%)	**16.0**
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

82 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
100

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**16.4**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**19.5**
Right Flare	(%)	**20.3**
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

81 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 45.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
101

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**14.2**
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**23.0**
Right Flare	(%)	**16.5**
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : S N St and Sixth St $28,000.00

NE Perpendicular

108 Compliant Curb Ramp

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
64

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.5
Right Flare	(%)	9.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 3.3
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Combination

111 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

73

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	54.0
Length of Ramp / Pad	(in)	116.0	96.0
Slope of the Ramp / Pad	(%)	3.2	2.0
X Slope of the Ramp / Pad	(%)	0.2	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.1
Top Landing X Slope	(%)	1.6	0.8
Length of Combo. Ramp	(in)	73.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	1.2	
Bottom Landing Length	(in)	62.0	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	8.3	
Right Flare	(%)	6.8	
Gutter Slope	(%)	4.3	
Gutter XSlope	(%)	1.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.4	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

109 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Left: 10.9%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority

75

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	53.0
Length of Ramp / Pad	(in)	190.0	190.0
Slope of the Ramp / Pad	(%)	4.9	3.0
X Slope of the Ramp / Pad	(%)	1.0	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	1.8
Top Landing X Slope	(%)	1.9	**2.2**
Length of Combo. Ramp	(in)	82.0	
Combo. Ramp Slope	(%)	8.0	
Combo. Ramp X Slope	(%)	1.5	
Bottom Landing Length	(in)	58.0	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.9**	
Right Flare	(%)	6.1	
Gutter Slope	(%)	2.4	
Gutter XSlope	(%)	1.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.1	2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

110 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
87

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	67.0
Length of Ramp / Pad	(in)	105.0	123.0
Slope of the Ramp / Pad	(%)	2.8	5.8
X Slope of the Ramp / Pad	(%)	0.3	0.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.6	2.2
Top Landing X Slope	(%)	**4.0**	1.2
Length of Combo. Ramp	(in)	92.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	1.0	
Bottom Landing Length	(in)	**35.0**	
Bottom Landing Slope	(in)	**7.8**	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	10.0	
Right Flare	(%)	**10.3**	
Gutter Slope	(%)	4.0	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.7	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S N St and W Yosemite Ave **$14,000.00**

Total Costs for Curb Ramps along : S N St **$63,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1397	S O St	W Yosemite Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

75 Compliant Curb Ramp

- *As-Built Description:*

  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	60.0
Length of Ramp / Pad	(in)	111.0	138.0
Slope of the Ramp / Pad	(%)	3.9	3.6
X Slope of the Ramp / Pad	(%)	0.2	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.7
Top Landing X Slope	(%)	1.9	1.5
Length of Combo. Ramp	(in)	50.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	50.0	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	0.8	
Left Flare	(%)	7.8	
Right Flare	(%)	7.7	
Gutter Slope	(%)	4.3	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.9	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

74 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

64

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.4
Right Flare	(%)	8.3
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	6.6	2.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

76 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.5%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority

74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	49.0	49.0
Length of Ramp / Pad	(in)	90.0	108.0
Slope of the Ramp / Pad	(%)	3.7	4.4
X Slope of the Ramp / Pad	(%)	0.1	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.0	1.6
Top Landing X Slope	(%)	**2.5**	0.5

Length of Combo. Ramp	(in)	49.0
Combo. Ramp Slope	(%)	7.5
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	0.8
Bottom Landing X Slope	(in)	0.3
Left Flare	(%)	8.5
Right Flare	(%)	6.7
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

73 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* Left: 2.5%
- *Proposed Solution:*

  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
74

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	54.0
Length of Ramp / Pad	(in)	157.0	91.0
Slope of the Ramp / Pad	(%)	2.7	4.1
X Slope of the Ramp / Pad	(%)	1.6	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.5**	0.4
Top Landing X Slope	(%)	1.3	1.6
Length of Combo. Ramp	(in)	64.0	
Combo. Ramp Slope	(%)	**7.6**	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	49.0	
Bottom Landing Slope	(in)	0.9	
Bottom Landing X Slope	(in)	1.1	
Left Flare	(%)	7.0	
Right Flare	(%)	4.4	
Gutter Slope	(%)	2.8	
Gutter XSlope	(%)	1.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S O St and W Yosemite Ave **$7,000.00**

Total Costs for Curb Ramps along : S O St **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	708	S Park Dr	California Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

944 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — No Sidewalk, Curb Ramp Not Required

943 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S **No Sidewalk, Curb Ramp Not Required**

945 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **S Park Dr** ***and*** **California Ave** **$0.00**

N **No Sidewalk, Curb Ramp Not Required**

965 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

966 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

967 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **S Park Dr** ***and*** **N J St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

940 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

941 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

942 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **S Park Dr** ***and*** **Park Ln** **$0.00**

Total Costs for Curb Ramps along : **S Park Dr** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	438	S Wolftrap St	Capistrano Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2598 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
6

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.5
Right Flare	(%)	4.0
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2600 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2599 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
6

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.0
Right Flare	(%)	4.6
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Wolftrap St and Capistrano Dr **$13,000.00**

NE Curb Ramp Required

2596 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2595 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 11.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.1
Right Flare	(%)	9.3
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.8	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2597 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
8

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.8%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.0
Right Flare	(%)	4.9
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Wolftrap St and Gamay Ave **$10,500.00**

NE Perpendicular

1896 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.0
Right Flare	(%)	**10.8**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1897 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
10

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.9
Right Flare	(%)	7.4
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1895 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **S Wolftrap St** ***and*** **Maple St** **$16,750.00**

N Curb Ramp Required

1876 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1878 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.3
Right Flare	(%)	7.1
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.3**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1877 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.4
Right Flare	(%)	7.9
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Wolftrap St and Oak St **$20,000.00**

E Curb Ramp Required

1874 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1873 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
12

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.1
Right Flare	(%)	6.7
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1875 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
10

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	8.5
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : S Wolftrap St and Pluma St **$21,000.00**

Total Costs for Curb Ramps along : S Wolftrap St **$81,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1551	Saint Mary Ave	Munras Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

2843 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.8

Left Flare	(%)	4.3
Right Flare	(%)	5.0
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

2844 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Saint Mary Ave and Munras Ave **$2,500.00**

NE Perpendicular

2845 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
22

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	3.7
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	0.4 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2846 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2847 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Saint Mary Ave** ***and*** **Stadium Rd** **$6,500.00**

Total Costs for Curb Ramps along : **Saint Mary Ave** **$9,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	336	Salvador Way	Josephine Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2053 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.2
Right Flare	(%)	4.1
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2052 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	**2.9**

Left Flare	(%)	5.7
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2051 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Salvador Way and Josephine Ct **$20,000.00**

N Curb Ramp Required

2054 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2055 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
14

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.2
Right Flare	(%)	6.7
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2056 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.1
Right Flare	(%)	8.0
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Salvador Way and La Jolla Way **$16,500.00**

Total Costs for Curb Ramps along : Salvador Way **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1550	San Andrea Ave	Munras Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2839 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

2838 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.7
Right Flare	(%)	6.0
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Andrea Ave ***and*** Munras Ave **$13,500.00**

Total Costs for Curb Ramps along : San Andrea Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	320	San Angelo Ave	Munra Ave

NW — Perpendicular

2827 Detectable Warnings

- *As-Built Description:*
  Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.
- *Proposed Solution:*
  Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.0
Right Flare	(%)	5.7
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	1.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

2829 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2828 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
30

• *As-Built Description:*
Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.

• *Proposed Solution:*
Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.1
Right Flare	(%)	4.6
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Angelo Ave** ***and*** **Munra Ave** **$12,000.00**

Total Costs for Curb Ramps along : **San Angelo Ave** **$12,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1501	San Bruno Ave	Raymond Thomas St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3728 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	4.6
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	3.2
Right Flare	(%)	7.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3729 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.3
Right Flare	(%)	7.2
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3730 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **San Bruno Ave** ***and*** **Raymond Thomas St** **$16,500.00**

Total Costs for Curb Ramps along : **San Bruno Ave** **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1598	San Carlos Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Perpendicular

3688 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.1
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE — Curb Ramp Required

3689 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Carlos Ave ***and*** Lemon Ave **$13,500.00**

NW Curb Ramp Required

3695 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3694 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.1
Right Flare	(%)	8.9
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Carlos Ave** ***and*** **Tangerine Ave** **$10,000.00**

NE Perpendicular

3690 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.5**
Right Flare	(%)	8.4
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3693 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
29

Width of Ramp / Pad	(in)	75.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.2
Right Flare	(%)	4.3
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3691 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.2
Right Flare	(%)	5.7
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3692 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.1
Right Flare	(%)	7.4
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Carlos Ave and Valencia Ave **$22,750.00**

Total Costs for Curb Ramps along : **San Carlos Ave** **$46,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1605	San Diego Ave	Lemon Ave

NE — Curb Ramp Required

3775 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3774 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.1%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	3.2
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Diego Ave and Lemon Ave **$10,000.00**

Total Costs for Curb Ramps along : San Diego Ave **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	596	San Gabriel Dr	Linda Mesa Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3456 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3455 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.8
Right Flare	(%)	7.3
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3457 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.7
Right Flare	(%)	6.9
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.6 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Gabriel Dr *and* Linda Mesa Dr **$16,500.00**

NE Perpendicular

3458 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.6
Right Flare	(%)	5.7
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3459 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3460 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.9
Right Flare	(%)	7.0
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Gabriel Dr** ***and*** **Mira Loma Way** **$20,000.00**

NE Curb Ramp Required

3454 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3453 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
53

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.6
Right Flare	(%)	4.3
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	0.0	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Gabriel Dr** ***and*** **Verde Mesa Way** **$13,500.00**

Total Costs for Curb Ramps along : **San Gabriel Dr** **$50,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	340	San Jose Ave	Citrus Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

3703 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

3704 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.7
Right Flare	(%)	9.4
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3702 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.7**
Right Flare	(%)	6.3
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Jose Ave *and* Citrus Way **$16,000.00**

NE Curb Ramp Required

3710 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3709 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.7**
Right Flare	(%)	5.1
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Jose Ave *and* Lemon Ave **$13,500.00**

NE Perpendicular

3696 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.3
Right Flare	(%)	3.9
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

3698 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3697 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.4
Right Flare	(%)	3.5
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Jose Ave** ***and*** **Tangerine Ave** **$12,500.00**

NE Perpendicular

3707 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	7.0
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3706 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.5
Right Flare	(%)	5.0
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3708 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3705 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.6
Right Flare	(%)	7.0
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Jose Ave and Valencia Ave **$18,500.00**

Total Costs for Curb Ramps along : **San Jose Ave** **$60,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	616	San Juan Dr	Asilomar Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1794 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.2
Right Flare	(%)	**10.1**
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1796 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 35.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.9
Right Flare	(%)	8.0
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1795 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Juan Dr and Asilomar Dr **$21,000.00**

Total Costs for Curb Ramps along : San Juan Dr **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	70	San Pietro Dr	Fairfield Way

NE Perpendicular

2333 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
0

Measurements		
Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.2
Right Flare	(%)	5.9
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

2335 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

Measurements		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2334 Ramp Transition

- *As-Built Description:*

  Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
1

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.7
Right Flare	(%)	6.0
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : San Pietro Dr *and* Fairfield Way **$10,000.00**

NE Curb Ramp Required

2332 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2331 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.8
Right Flare	(%)	4.9
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **San Pietro Dr** ***and*** **Running Brook Dr** **$13,500.00**

Total Costs for Curb Ramps along : **San Pietro Dr** **$23,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1601	San Ramon Ave	Lemon Ave

NW Perpendicular

3711 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.0
Right Flare	(%)	8.0
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3712 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Ramon Ave ***and*** Lemon Ave **$10,000.00**

Total Costs for Curb Ramps along : San Ramon Ave **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1457	San Sebastian Way	Toledo Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2176 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
40

Width of Ramp / Pad	(in)	75.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	5.3
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2177 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	5.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	3.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

2175 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : San Sebastian Way and Toledo Way **$13,500.00**

Total Costs for Curb Ramps along : San Sebastian Way **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	307	Sanarita Way	Dominguez Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2013 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
12

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.0

Left Flare	(%)	2.7
Right Flare	(%)	4.5
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2014 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	**3.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	8.6
Right Flare	(%)	2.1
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2012 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.7
Right Flare	(%)	1.0
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2015 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
22

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	2.3
Right Flare	(%)	8.2
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sanarita Way and Dominguez Dr **$19,250.00**

NE Perpendicular

2009 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	59.5
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**12.5**
Right Flare	(%)	**13.3**
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2010 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**15.4**
Right Flare	(%)	**13.3**
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2008 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**13.4**
Right Flare	(%)	6.9
Gutter Slope	(%)	**5.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2011 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 11.5% Right: 18.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
30

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**11.5**
Right Flare	(%)	**18.0**
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	**3.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sanarita Way and Jericho Dr $22,750.00

NE Perpendicular

2090 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
28

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	64.5
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.4
Right Flare	(%)	7.3
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2091 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.7
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2093 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
15

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	64.5
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.3
Right Flare	(%)	2.6
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2092 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	4.0
Right Flare	(%)	**10.7**
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.2	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sanarita Way and Jesse Dr **$15,250.00**

Total Costs for Curb Ramps along : Sanarita Way **$57,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1509	Santa Bonita St	Deerwood Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

326 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.2**
Right Flare	(%)	6.1
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

327 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.3
Right Flare	(%)	5.7
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Santa Bonita St *and* Deerwood Ct **$6,500.00**

E Curb Ramp Required

320 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

321 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.9
Right Flare	(%)	7.4
Gutter Slope	(%)	**11.7**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

322 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.6
Right Flare	(%)	9.2
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Santa Bonita St and Gamay St **$13,500.00**

NE No Sidewalk, Curb Ramp Not Required

372 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

373 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

371 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

374 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
76

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**14.3**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**13.1**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Santa Bonita St** ***and*** **Maple St** **$3,250.00**

Total Costs for Curb Ramps along : **Santa Bonita St** **$23,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1507	Santa Clara St	323 Santa Clara St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SE Perpendicular

315 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
60

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	4.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.4
Right Flare	(%)	5.5
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Santa Clara St *and* 323 Santa Clara St **$3,250.00**

NE Perpendicular

314 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	61.5
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.7
Right Flare	(%)	5.8
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

313 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.3**
Right Flare	(%)	8.7
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

312 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Santa Clara St and Gamay St $20,000.00

NE Perpendicular

318 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.6
Right Flare	(%)	4.0
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

317 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
60

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.1
Right Flare	(%)	7.7
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

316 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Santa Clara St and Santa Cruz St **$13,250.00**

Total Costs for Curb Ramps along : Santa Clara St **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	577	Santa Lucia Dr	Marina Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

1786 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

1785 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
15

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.7
Right Flare	(%)	6.2
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1787 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
21

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.4
Right Flare	(%)	7.9
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Santa Lucia Dr *and* Marina Dr **$21,000.00**

E Curb Ramp Required

1776 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1777 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
16

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.1
Right Flare	(%)	7.2
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1778 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
19

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.5
Right Flare	(%)	8.3
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Santa Lucia Dr and San Juan Dr **$21,000.00**

E Curb Ramp Required

1783 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1782 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
21

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	8.2
Right Flare	(%)	6.0
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1784 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
10

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.3
Right Flare	(%)	6.1
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Santa Lucia Dr and Seaside Dr **$21,000.00**

Total Costs for Curb Ramps along : Santa Lucia Dr **$63,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1120	Sassafras Dr	Lansing St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1719 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

1721 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1720 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sassafras Dr** ***and*** **Lansing St** **$0.00**

Total Costs for Curb Ramps along : **Sassafras Dr** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1560	Saunders Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

SE — Curb Ramp Required

2986 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

2985 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.4
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Saunders Ave** ***and*** **Lemon Ave** **$13,500.00**

Total Costs for Curb Ramps along : **Saunders Ave** **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	313	Sauret St	Peerless St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

3122 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.6
Right Flare	(%)	5.4
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3121 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.9
Right Flare	(%)	8.2
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.9	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3123 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sauret St and Peerless St **$20,000.00**

Total Costs for Curb Ramps along : Sauret St **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	533	Scarlet Dr	Crimson Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

4426 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

4425 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.9**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.1
Right Flare	(%)	**11.3**
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**16.0**

Street Grade (Left / Right)	(%)	0.6	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4427 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
38

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.6**
Right Flare	(%)	7.9
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.0	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Scarlet Dr and Crimson Way **$21,000.00**

Total Costs for Curb Ramps along : Scarlet Dr **$21,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1178	Schnoor Ave	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

601 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

602 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
23

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SSW Perpendicular

604 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 5.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	71.0
Length of Ramp / Pad	(in)	126.0
Slope of the Ramp / Pad	(%)	3.8
X Slope of the Ramp / Pad	(%)	**5.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.9

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 11.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

603 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
37

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	126.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	9.7 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Schnoor Ave and Fifth St **$9,750.00**

E No Sidewalk, Curb Ramp Not Required

1924 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1926 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 40.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.8
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.2	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

1925 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* Left: 47.0" Right: 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)	47.0	47.0
Length of Ramp / Pad	(in)	90.0	81.0
Slope of the Ramp / Pad	(%)	7.2	6.6
X Slope of the Ramp / Pad	(%)	0.6	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.1
Top Landing X Slope	(%)	0.9	1.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	2.7
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Schnoor Ave and Industrial Ave **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

551 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

550 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

549 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Schnoor Ave** ***and*** **Julius Ave** **$0.00**

NE Perpendicular

2627 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.7
Right Flare	(%)	7.7
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.2	2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

2628 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	**47.0**
Length of Ramp / Pad	(in)	N/A	108.0
Slope of the Ramp / Pad	(%)	N/A	6.3
X Slope of the Ramp / Pad	(%)	N/A	0.5
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	1.2
Top Landing X Slope	(%)	N/A	1.1

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	0.2
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Parallel

2626 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	59.0
Length of Ramp / Pad	(in)	145.0	149.0
Slope of the Ramp / Pad	(%)	7.7	4.1
X Slope of the Ramp / Pad	(%)	0.3	**3.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.7
Top Landing X Slope	(%)	**3.7**	**2.8**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	2.1	2.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Schnoor Ave *and* Modoc St** **$20,500.00**

NE No Sidewalk, Curb Ramp Not Required

1928 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1929 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1927 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Schnoor Ave** ***and*** **Plumas St** **$0.00**

NE Parallel

546 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

		LEFT	RIGHT
Width of Ramp / Pad	(in)	90.0	92.0
Length of Ramp / Pad	(in)	74.0	80.0
Slope of the Ramp / Pad	(%)	7.3	5.7
X Slope of the Ramp / Pad	(%)	1.3	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.1
Top Landing X Slope	(%)	0.9	1.4

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.7
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	**NO**
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

547 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
37

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.5
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.8
Right Flare	(%)	9.0
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

545 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

548 Compliant Curb Ramp

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.6
Right Flare	(%)	7.1
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.1	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Schnoor Ave** ***and*** **Third St** **$6,250.00**

Total Costs for Curb Ramps along : **Schnoor Ave** **$50,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	160	Seahorse Ct	Shannon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

692 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**12.6**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

694 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**14.2**
Right Flare	(%)	**11.8**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

693 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Seahorse Ct and Shannon Ave **$20,000.00**

Total Costs for Curb Ramps along : Seahorse Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	677	Seaside Dr	Asilomar Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1800 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
27

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.4

Left Flare	(%)	8.8
Right Flare	(%)	5.1
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1801 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Unit Cost **$500.00**

Priority
8

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.6
Right Flare	(%)	8.1
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1802 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Seaside Dr and Asilomar Dr **$14,500.00**

Total Costs for Curb Ramps along : Seaside Dr **$14,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	449	Segovia Ct	Alicante Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2156 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2158 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	76.0
Length of Ramp / Pad	(in)	78.5
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.1
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2157 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	80.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.3
Right Flare	(%)	3.5
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	3.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Segovia Ct *and* Alicante Way — $20,000.00

NW Curb Ramp Required

2154 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2155 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.9
Right Flare	(%)	5.8
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Segovia Ct and Barcelona Way $10,250.00

N Curb Ramp Required

2162 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2164 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
36

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	5.6
Right Flare	(%)	4.1
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2163 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.2
Right Flare	(%)	5.9
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Segovia Ct and San Sebastian Way **$13,500.00**

N Curb Ramp Required

2165 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2167 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.3
Right Flare	(%)	7.0
Gutter Slope	(%)	4.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	4.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2166 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 4.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
39

Width of Ramp / Pad	(in)	78.5
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	3.9
Right Flare	(%)	5.0
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	3.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Segovia Ct and Sevilla St **$16,750.00**

N Curb Ramp Required

2159 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2161 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	80.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.0**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.3
Right Flare	(%)	7.7
Gutter Slope	(%)	**12.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2160 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	84.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.5
Right Flare	(%)	3.0
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 2.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Segovia Ct and Toluca **$13,500.00**

Total Costs for Curb Ramps along : **Segovia Ct** **$74,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	967	Seneca Dr	Pecan Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

2866 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.5"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
45

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.2
Right Flare	(%)	4.6
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2865 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.4

Left Flare	(%)	5.4
Right Flare	(%)	3.7
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2867 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Seneca Dr and Pecan Ave **$9,000.00**

Total Costs for Curb Ramps along : Seneca Dr **$9,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1354	Seventh St	S J St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

141 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Left: 10.5% Right: 10.5%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	108.0	110.0
Slope of the Ramp / Pad	(%)	4.1	4.6
X Slope of the Ramp / Pad	(%)	1.1	0.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.9
Top Landing X Slope	(%)	**2.3**	1.4
Length of Combo. Ramp	(in)	77.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	**30.0**	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.5**	
Right Flare	(%)	**10.5**	
Gutter Slope	(%)	**7.8**	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.9	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

144 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Left: 10.6%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
49

		LEFT	RIGHT
Width of Ramp / Pad	(in)	57.0	56.0
Length of Ramp / Pad	(in)	85.0	85.0
Slope of the Ramp / Pad	(%)	3.7	4.7
X Slope of the Ramp / Pad	(%)	0.3	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.9	1.1
Top Landing X Slope	(%)	1.7	0.3
Length of Combo. Ramp	(in)	49.0	
Combo. Ramp Slope	(%)	7.1	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	**30.0**	
Bottom Landing Slope	(in)	1.3	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**10.6**	
Right Flare	(%)	8.9	
Gutter Slope	(%)	4.4	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.7	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

142 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Right: 10.2%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	54.0
Length of Ramp / Pad	(in)	76.0	79.0
Slope of the Ramp / Pad	(%)	5.6	3.3
X Slope of the Ramp / Pad	(%)	0.6	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.7
Top Landing X Slope	(%)	1.0	**2.2**
Length of Combo. Ramp	(in)	77.0	
Combo. Ramp Slope	(%)	7.9	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	**30.0**	
Bottom Landing Slope	(in)	**2.2**	
Bottom Landing X Slope	(in)	0.7	
Left Flare	(%)	9.1	
Right Flare	(%)	**10.2**	
Gutter Slope	(%)	**6.6**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

143 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.5% Right: 2.5%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	56.0
Length of Ramp / Pad	(in)	93.0	73.0
Slope of the Ramp / Pad	(%)	5.4	6.5
X Slope of the Ramp / Pad	(%)	**3.5**	**2.5**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	1.9
Top Landing X Slope	(%)	1.4	0.9
Length of Combo. Ramp	(in)	**30.0**	
Combo. Ramp Slope	(%)	0.2	
Combo. Ramp X Slope	(%)	0.4	
Bottom Landing Length	(in)	74.0	
Bottom Landing Slope	(in)	**6.2**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.7**	
Right Flare	(%)	8.8	
Gutter Slope	(%)	**5.5**	
Gutter XSlope	(%)	1.3	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	**0.0**	
Street Grade (Left / Right)	(%)	0.6	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Seventh St and S J St **$28,000.00**

E Perpendicular

125 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 20.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
80

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**20.0**
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.1
Left Flare	(%)	**12.0**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**
Street Grade (Left / Right)	(%)	10 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

126 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**6.7**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.6
Right Flare	(%)	**13.8**
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

124 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	**11.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**13.6**
Right Flare	(%)	**11.0**
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

123 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
87

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	**13.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**16.0**
Right Flare	(%)	**12.6**
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Seventh St and S K St $28,000.00

N Perpendicular

49 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
76

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.8
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.3 N/A
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

48 Ramp Flare

- *As-Built Description:*

  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 11.2% Right: 11.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
75

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**11.2**
Right Flare	(%)	**11.2**
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.4	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Seventh St and S O St **$10,250.00**

Total Costs for Curb Ramps along : Seventh St **$66,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	782	Shannon Ave	Driftwood Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

624 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N — Perpendicular

625 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 45.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
41

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.5**
Right Flare	(%)	7.4
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

626 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**14.7**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**12.1**
Right Flare	(%)	**14.1**
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Shannon Ave and Driftwood Dr **$20,500.00**

NE No Sidewalk, Curb Ramp Not Required

563 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

564 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

562 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Shannon Ave** ***and*** **National Ave** **$0.00**

NE Perpendicular

673 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.1
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.9 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

674 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.5
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.7 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

672 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 1.0"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.8
Right Flare	(%)	7.3
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

671 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 1.0"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.1
Right Flare	(%)	6.3
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Shannon Ave and Sunset Ave **$14,750.00**

Total Costs for Curb Ramps along : **Shannon Ave** **$35,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1495	Sharon Bvd	Adell St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3855 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SE — No Sidewalk, Curb Ramp Not Required

3854 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

W No Sidewalk, Curb Ramp Not Required

3856 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Sharon Bvd** ***and*** **Adell St** **$0.00**

E No Sidewalk, Curb Ramp Not Required

3857 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

N No Sidewalk, Curb Ramp Not Required

3859 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3858 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *As-is* Left: % Right: %
- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Sharon Bvd** ***and*** **Cardwell St** **$0.00**

NE Parallel

1191 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.5% Right: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	103.0	90.0
Slope of the Ramp / Pad	(%)	6.2	6.6
X Slope of the Ramp / Pad	(%)	**2.5**	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.0	1.6
Top Landing X Slope	(%)	**2.7**	**2.1**

Bottom Landing Length	(in)	54.5
Bottom Landing Slope	(%)	1.4
Bottom Landing X Slope	(%)	**5.7**
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**Not Entire Width**
Dome Setback	(in)	**16.5**

Street Grade (Left / Right)	(%)	1.0 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1190 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.3
Right Flare	(%)	6.7
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1189 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sharon Bvd *and* E Lincoln Ave **$20,500.00**

NE Parallel

1200 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	N/A
Length of Ramp / Pad	(in)	112.0	N/A
Slope of the Ramp / Pad	(%)	7.6	N/A
X Slope of the Ramp / Pad	(%)	**2.8**	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.3	N/A
Top Landing X Slope	(%)	**3.6**	N/A

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1199 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.7
Right Flare	(%)	6.8
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

1198 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sharon Bvd and Harding Ave **$17,250.00**

NE Perpendicular

1194 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
51

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.5
Right Flare	(%)	8.5
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.0 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Parallel

1193 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.6%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	65.0	64.0
Slope of the Ramp / Pad	(%)	6.4	5.1
X Slope of the Ramp / Pad	(%)	**2.6**	2.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	1.8
Top Landing X Slope	(%)	**2.3**	**5.2**

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**Not Entire Width**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.7 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1192 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sharon Bvd *and* Owens St **$17,000.00**

NE Perpendicular

1168 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
75

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.1
Right Flare	(%)	**10.7**
Gutter Slope	(%)	**12.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1169 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**14.0**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.3**
Right Flare	(%)	**11.2**
Gutter Slope	(%)	**17.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.5 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1167 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
93

Width of Ramp / Pad	(in)	118.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**28.7**
Right Flare	(%)	**26.0**
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 N/A
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sharon Bvd and Sonora St **$19,500.00**

NE No Sidewalk, Curb Ramp Not Required

3860 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
5

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3861 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

SW No Sidewalk, Curb Ramp Not Required

3862 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
5

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Sharon Bvd *and* W Clark St **$0.00**

NE Perpendicular

1179 Ramp Flare

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

• *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

• *As-is* Left: 10.1%

• *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	120.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.1**
Right Flare	(%)	7.3
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Parallel

1178 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7% Right: 3.3%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	61.0	62.5
Slope of the Ramp / Pad	(%)	8.0	6.5
X Slope of the Ramp / Pad	(%)	**2.7**	**3.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.9	**8.1**
Top Landing X Slope	(%)	**2.1**	1.9

Bottom Landing Length	(in)	55.0
Bottom Landing Slope	(%)	**3.1**
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Entire Width**
Dome Setback	(in)	**15.0**

Street Grade (Left / Right)	(%)	0.4	N/A
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1177 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sharon Bvd and W South St **$17,250.00**

NE Parallel

1203 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 3.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
65

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	64.5	66.0
Slope of the Ramp / Pad	(%)	7.2	4.5
X Slope of the Ramp / Pad	(%)	1.9	**3.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.8	0.2
Top Landing X Slope	(%)	**3.2**	1.1

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**5.3**
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Entire Width**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.3 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1202 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	54.5
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**12.2**
Right Flare	(%)	9.3
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

1201 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
141

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sharon Bvd** ***and*** **Wilson Ave** **$20,500.00**

Total Costs for Curb Ramps along : **Sharon Bvd** **$112,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	357	Shelly Cove	Pamela Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

2374 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.6
Right Flare	(%)	4.4
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2373 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
23

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.3

Left Flare	(%)	5.3
Right Flare	(%)	6.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.5 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2372 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
110

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Shelly Cove and Pamela Dr **$20,000.00**

Total Costs for Curb Ramps along : Shelly Cove **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	142	Shoreside Dr	Running Brook Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW **Driveway**

2327 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2325 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
11

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	6.1
Right Flare	(%)	4.1
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2326 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
1

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	3.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.5
Right Flare	(%)	3.9
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Shoreside Dr and Running Brook Dr **$5,750.00**

Total Costs for Curb Ramps along : **Shoreside Dr** **$5,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1075	Sierra St	E Lincoln Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1145 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.0
Right Flare	(%)	8.6
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1146 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.5
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.6
Right Flare	(%)	9.2
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.7 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1148 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.5
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.2
Right Flare	(%)	6.6
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1147 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.5
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.2
Right Flare	(%)	6.6
Gutter Slope	(%)	7.1
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.0	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sierra St *and* E Lincoln Ave **$15,750.00**

NE No Sidewalk, Curb Ramp Not Required

1142 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1141 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1143 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1144 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sierra St and E Rush St **$0.00**

N Curb Ramp Required

1224 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1225 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1226 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
40

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.8
Right Flare	(%)	5.9
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	3.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sierra St and Green Way **$10,250.00**

Total Costs for Curb Ramps along : Sierra St **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	987	Sixth St	S G St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

1113 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.0
Right Flare	(%)	6.6
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	1.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1112 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.9

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

1114 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 9.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
48

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.8
Right Flare	(%)	8.1
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.0	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S G St **$10,250.00**

E Perpendicular

1105 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	9.5
Right Flare	(%)	7.5
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.1 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1102 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	127.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	N/A
Right Flare	(%)	**10.8**
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.6 1.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

1104 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	57.0
Length of Ramp / Pad	(in)	N/A	182.0
Slope of the Ramp / Pad	(%)	N/A	7.3
X Slope of the Ramp / Pad	(%)	N/A	**2.8**
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.5
Top Landing X Slope	(%)	N/A	**2.3**

Bottom Landing Length	(in)	51.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	0.1
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	1.4	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Parallel

1103 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	N/A
Length of Ramp / Pad	(in)	224.0	N/A
Slope of the Ramp / Pad	(%)	5.4	N/A
X Slope of the Ramp / Pad	(%)	1.8	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	1.0	N/A
Top Landing X Slope	(%)	2.0	N/A

Bottom Landing Length	(in)	**30.0**
Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	2.0
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S H St **$24,000.00**

E Perpendicular

158 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**13.9**
Right Flare	(%)	**14.3**
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Combination

157 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Left: 10.2% Right: 11.5%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
82

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**45.0**	**45.0**
Slope of the Ramp / Pad	(%)	4.3	3.7
X Slope of the Ramp / Pad	(%)	1.2	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.1
Top Landing X Slope	(%)	1.3	0.4

Length of Combo. Ramp	(in)	81.0
Combo. Ramp Slope	(%)	5.9
Combo. Ramp X Slope	(%)	1.3

Bottom Landing Length	(in)	**40.0**
Bottom Landing Slope	(in)	**5.2**
Bottom Landing X Slope	(in)	0.4
Left Flare	(%)	**10.2**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

159 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
90

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**36.0**	**34.0**
Slope of the Ramp / Pad	(%)	1.2	0.7
X Slope of the Ramp / Pad	(%)	1.3	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.7
Top Landing X Slope	(%)	**2.2**	0.1
Length of Combo. Ramp	(in)	88.0	
Combo. Ramp Slope	(%)	8.6	
Combo. Ramp X Slope	(%)	1.9	
Bottom Landing Length	(in)	**36.0**	
Bottom Landing Slope	(in)	**3.6**	
Bottom Landing X Slope	(in)	1.9	
Left Flare	(%)	**14.9**	
Right Flare	(%)	**10.1**	
Gutter Slope	(%)	**9.0**	
Gutter XSlope	(%)	1.4	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	2.2	2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

160 Ramp Slope

- *As-Built Description:*

Cross slope of an existing combination ramp run exceeds 1:48 (2%).

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
87

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**34.0**	**36.0**
Slope of the Ramp / Pad	(%)	**11.4**	6.9
X Slope of the Ramp / Pad	(%)	0.8	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	0.7
Top Landing X Slope	(%)	1.7	1.6
Length of Combo. Ramp	(in)	88.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	**2.4**	
Bottom Landing Length	(in)	**30.0**	
Bottom Landing Slope	(in)	**4.8**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**11.3**	
Right Flare	(%)	**11.0**	
Gutter Slope	(%)	4.9	
Gutter XSlope	(%)	1.1	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.4	2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S I St **$28,000.00**

E Combination

145 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
76

		LEFT	RIGHT
Width of Ramp / Pad	(in)	49.0	49.0
Length of Ramp / Pad	(in)	**38.0**	**36.0**
Slope of the Ramp / Pad	(%)	4.4	5.0
X Slope of the Ramp / Pad	(%)	1.0	1.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.3	2.1
Top Landing X Slope	(%)	**2.2**	0.9
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	9.1	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	**31.0**	
Bottom Landing Slope	(in)	**5.7**	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	**14.7**	
Right Flare	(%)	**13.8**	
Gutter Slope	(%)	**5.9**	
Gutter XSlope	(%)	1.0	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	3.7	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Combination

148 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 8.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**44.0**	**43.0**
Slope of the Ramp / Pad	(%)	6.4	**8.4**
X Slope of the Ramp / Pad	(%)	1.6	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.4
Top Landing X Slope	(%)	**2.6**	2.0
Length of Combo. Ramp	(in)	49.0	
Combo. Ramp Slope	(%)	6.8	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	**40.0**	
Bottom Landing Slope	(in)	**5.7**	
Bottom Landing X Slope	(in)	0.2	
Left Flare	(%)	**11.4**	
Right Flare	(%)	**15.0**	
Gutter Slope	(%)	**8.7**	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	2.7	1.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

146 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**30.0**	**30.0**
Slope of the Ramp / Pad	(%)	7.0	5.1
X Slope of the Ramp / Pad	(%)	1.4	1.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.2
Top Landing X Slope	(%)	**3.3**	**3.1**
Length of Combo. Ramp	(in)	74.0	
Combo. Ramp Slope	(%)	10.0	
Combo. Ramp X Slope	(%)	**2.2**	
Bottom Landing Length	(in)	**38.0**	
Bottom Landing Slope	(in)	**4.7**	
Bottom Landing X Slope	(in)	1.4	
Left Flare	(%)	**14.4**	
Right Flare	(%)	**16.1**	
Gutter Slope	(%)	**9.1**	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.1	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

147 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
81

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	**36.0**	**36.0**
Slope of the Ramp / Pad	(%)	**12.8**	5.6
X Slope of the Ramp / Pad	(%)	0.6	**2.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.9
Top Landing X Slope	(%)	**2.3**	**3.3**
Length of Combo. Ramp	(in)	80.0	
Combo. Ramp Slope	(%)	9.3	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	**38.0**	
Bottom Landing Slope	(in)	**5.3**	
Bottom Landing X Slope	(in)	1.5	
Left Flare	(%)	**16.0**	
Right Flare	(%)	**12.7**	
Gutter Slope	(%)	**7.7**	
Gutter XSlope	(%)	1.6	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	1.1	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S J St **$28,000.00**

NE Combination

94 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
70

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	**36.0**	**36.0**
Slope of the Ramp / Pad	(%)	6.3	8.0
X Slope of the Ramp / Pad	(%)	0.8	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.8
Top Landing X Slope	(%)	1.6	0.5
Length of Combo. Ramp	(in)	73.0	
Combo. Ramp Slope	(%)	8.5	
Combo. Ramp X Slope	(%)	1.0	
Bottom Landing Length	(in)	**40.0**	
Bottom Landing Slope	(in)	**6.2**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**12.2**	
Right Flare	(%)	**14.5**	
Gutter Slope	(%)	**6.1**	
Gutter XSlope	(%)	**2.6**	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	0.6	2.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

95 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* Left: 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
83

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**43.0**	60.0
Length of Ramp / Pad	(in)	**38.0**	**37.0**
Slope of the Ramp / Pad	(%)	**12.8**	**12.2**
X Slope of the Ramp / Pad	(%)	1.8	**3.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	1.7
Top Landing X Slope	(%)	0.4	0.5
Length of Combo. Ramp	(in)	73.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	**34.0**	
Bottom Landing Slope	(in)	**5.9**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.7**	
Right Flare	(%)	**11.7**	
Gutter Slope	(%)	**8.9**	
Gutter XSlope	(%)	**2.1**	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	2.3	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

93 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 10.2%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	59.0
Length of Ramp / Pad	(in)	**37.0**	**39.0**
Slope of the Ramp / Pad	(%)	5.4	**10.2**
X Slope of the Ramp / Pad	(%)	**3.7**	0.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.5
Top Landing X Slope	(%)	0.9	**3.2**
Length of Combo. Ramp	(in)	92.0	
Combo. Ramp Slope	(%)	7.2	
Combo. Ramp X Slope	(%)	1.5	
Bottom Landing Length	(in)	**38.0**	
Bottom Landing Slope	(in)	**5.9**	
Bottom Landing X Slope	(in)	1.5	
Left Flare	(%)	**12.8**	
Right Flare	(%)	**13.0**	
Gutter Slope	(%)	**7.3**	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	3.9	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

92 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.1%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	61.0	60.0
Length of Ramp / Pad	(in)	**47.0**	**37.0**
Slope of the Ramp / Pad	(%)	4.4	8.0
X Slope of the Ramp / Pad	(%)	1.3	**2.1**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	1.9
Top Landing X Slope	(%)	**3.7**	**5.0**
Length of Combo. Ramp	(in)	89.0	
Combo. Ramp Slope	(%)	6.4	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	**32.0**	
Bottom Landing Slope	(in)	**5.6**	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**10.2**	
Right Flare	(%)	**14.0**	
Gutter Slope	(%)	5.0	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	
Street Grade (Left / Right)	(%)	0.5	3.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S K St **$28,000.00**

NE Perpendicular

86 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**22.6**
Right Flare	(%)	**18.4**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

85 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 41.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
94

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**16.6**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**41.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**19.1**
Right Flare	(%)	**18.9**
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

87 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 43.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
87

Width of Ramp / Pad	(in)	**43.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**26.0**
Right Flare	(%)	**30.0**
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**2.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sixth St and S M St $20,500.00

NE Combination

78 Ramp Slope

- *As-Built Description:*
  Running slope of existing combination ramp run is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	58.0	**41.0**
Slope of the Ramp / Pad	(%)	4.0	6.6
X Slope of the Ramp / Pad	(%)	1.8	1.2
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.2
Top Landing X Slope	(%)	1.8	0.3

Length of Combo. Ramp	(in)	75.0
Combo. Ramp Slope	(%)	8.5
Combo. Ramp X Slope	(%)	0.3

Bottom Landing Length	(in)	**35.0**
Bottom Landing Slope	(in)	**2.2**
Bottom Landing X Slope	(in)	1.5
Left Flare	(%)	**10.9**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	1.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

77 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
80

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	56.0
Length of Ramp / Pad	(in)	64.0	64.0
Slope of the Ramp / Pad	(%)	6.7	6.8
X Slope of the Ramp / Pad	(%)	0.2	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	0.4
Top Landing X Slope	(%)	**3.8**	0.6
Length of Combo. Ramp	(in)	75.0	
Combo. Ramp Slope	(%)	8.5	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	**30.0**	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	1.1	
Left Flare	(%)	9.9	
Right Flare	(%)	9.7	
Gutter Slope	(%)	**6.5**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	7.0	
Street Grade (Left / Right)	(%)	0.6	3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

79 Ramp Slope

- *As-Built Description:*

Running slope of existing parallel curb ramp, where the run is less than 15' in length, is less than 5% or more than 8.3%.

- *As-is* Right: 10.4%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.1**
CBC 2007 **1127B.5.3**
ADAAG **4.8.2**
PROWAG **R304.3.2**

Unit Cost **$7000.00**

Priority
77

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	124.0
Length of Ramp / Pad	(in)	67.0	**30.0**
Slope of the Ramp / Pad	(%)	5.4	**10.4**
X Slope of the Ramp / Pad	(%)	0.4	0.5
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	1.1	N/A
Length of Combo. Ramp	(in)	76.0	
Combo. Ramp Slope	(%)	7.6	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	**29.0**	
Bottom Landing Slope	(in)	**4.0**	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	9.9	
Right Flare	(%)	**10.4**	
Gutter Slope	(%)	**8.4**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

80 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
103

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**12.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**15.1**
Right Flare	(%)	**17.3**
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 1.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sixth St and S O St $28,000.00

NE Perpendicular

67 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.6**
Right Flare	(%)	9.9
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

66 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.6**
Right Flare	(%)	8.6
Gutter Slope	(%)	**12.5**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 0.5
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

68 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 41.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	**41.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	**14.1**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sixth St and S P St **$20,500.00**

Total Costs for Curb Ramps along : **Sixth St** **$187,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	56	Solano St	Carmel St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3161 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.6
Right Flare	(%)	5.1
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3162 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.5
Right Flare	(%)	6.1
Gutter Slope	(%)	8.5
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	0.6 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3163 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Solano St and Carmel St **$16,500.00**

NE Perpendicular

3151 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.6

Left Flare	(%)	3.4
Right Flare	(%)	8.1
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 2.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3152 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
41

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	7.3
Right Flare	(%)	5.9
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3153 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Solano St *and* Los Arcos Ln **$13,000.00**

NE Perpendicular

3156 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 8.1%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.2
Right Flare	(%)	5.3
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.2	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3154 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
30

• *As-Built Description:*
Contrasting detectable warning surface not provided where a curb ramp, landing, blended transition, pedestrian pad, or island cut through connects to a street.

• *Proposed Solution:*
Install a compliant truncated dome surface that extends the full width and depth (36" min.) of the curb ramp, landing, blended transition, pedestrian pad, or island cut through, excluding the flared sides, inside the grooved

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.7

Left Flare	(%)	5.5
Right Flare	(%)	8.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	10.0

Street Grade (Left / Right)	(%)	1.7	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3155 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Solano St and Milow St **$12,500.00**

NE Perpendicular

3118 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.1
Right Flare	(%)	5.8
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.4	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3119 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	5.3
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.0**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	4.3	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **Curb Ramp Required**

3120 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Solano St** ***and*** **Sauret St** **$16,500.00**

Total Costs for Curb Ramps along : **Solano St** **$58,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	672	Sonora St	Ashlan Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3913 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.6
Right Flare	(%)	7.5
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	2.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3911 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 41.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
61

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**41.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.0**
Right Flare	(%)	7.5
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	**2.8**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

3912 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sonora St and Ashlan Way **$21,000.00**

NE Perpendicular

1136 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.5
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.1
Right Flare	(%)	6.1
Gutter Slope	(%)	**15.9**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1135 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**10.1**
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**13.4**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 3.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1133 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1134 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
65

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	**11.8**
Right Flare	(%)	7.5
Gutter Slope	(%)	**9.5**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	3.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sonora St and E Rush St **$20,000.00**

NE No Sidewalk, Curb Ramp Not Required

1230 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1231 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

1232 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sonora St** ***and*** **Green Way** **$0.00**

Total Costs for Curb Ramps along : **Sonora St** **$41,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	905	Soquel Ct	Sawmill St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

3367 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
27

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	8.9
Right Flare	(%)	4.3
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3368 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.1
Right Flare	(%)	7.5
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3369 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Soquel Ct and Sawmill St **$16,000.00**

Total Costs for Curb Ramps along : Soquel Ct **$16,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	159	Sparrow Way	Meadow Lark Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

2117 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Rolled

SE — No Sidewalk, Curb Ramp Not Required

2118 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Rolled

SW No Sidewalk, Curb Ramp Not Required

2119 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Rolled

Total Costs for Curb Ramps at : Sparrow Way and Meadow Lark Way **$0.00**

Total Costs for Curb Ramps along : Sparrow Way **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1061	Spring Ave	Winter Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1759 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

1761 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

1760 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Spring Ave** ***and*** **Winter Way** **$0.00**

Total Costs for Curb Ramps along : **Spring Ave** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1433	St 4Th	N C St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Perpendicular**

4384 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.0
Right Flare	(%)	**10.2**
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.5 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Parallel

4387 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
52

• *As-Built Description:*
The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

• *As-is* 6.5%

• *Proposed Solution:*
Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	81.0	81.0
Length of Ramp / Pad	(in)	85.0	84.0
Slope of the Ramp / Pad	(%)	8.0	**8.4**
X Slope of the Ramp / Pad	(%)	0.2	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.4
Top Landing X Slope	(%)	0.9	0.6

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.8	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Parallel

4385 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
54

• *As-Built Description:*
Clear width of ramp run is less than 48". (ADAAG requires 36" min)

• *As-is* Right: 43.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	93.0	**43.0**
Length of Ramp / Pad	(in)	97.0	91.0
Slope of the Ramp / Pad	(%)	7.1	5.5
X Slope of the Ramp / Pad	(%)	0.3	**2.4**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**4.1**	1.1
Top Landing X Slope	(%)	0.1	0.3

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W **Parallel**

4386 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.7% Right: 2.3%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**42.0**	49.0
Length of Ramp / Pad	(in)	71.0	80.0
Slope of the Ramp / Pad	(%)	7.4	8.2
X Slope of the Ramp / Pad	(%)	**2.7**	**2.3**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.7	1.9
Top Landing X Slope	(%)	1.5	2.0

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.3
Bottom Landing X Slope	(%)	1.6
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.0 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : St 4Th and N C St **$20,250.00**

Total Costs for Curb Ramps along : St 4Th **$20,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	373	St Julien Dr	Goosecross Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

225 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

226 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.3

Left Flare	(%)	8.6
Right Flare	(%)	4.6
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

227 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.0
Right Flare	(%)	7.0
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : St Julien Dr and Goosecross Dr **$20,000.00**

Total Costs for Curb Ramps along : St Julien Dr **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	527	St Tropez Dr	Howard Rd

N — No Sidewalk, Curb Ramp Not Required

1838 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1837 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	9.1
Right Flare	(%)	4.4
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1836 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.0%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	7.2
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : St Tropez Dr *and* Howard Rd **$13,500.00**

NE Perpendicular

1885 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
4

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.7
Right Flare	(%)	5.8
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1886 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
6

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.7
Right Flare	(%)	8.8
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1888 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.5
Right Flare	(%)	6.7
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1887 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
17

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	6.8
Right Flare	(%)	9.6
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : St Tropez Dr and Plumas St **$23,500.00**

Total Costs for Curb Ramps along : St Tropez Dr **$37,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	518	St. Michelle Dr	Goosecross Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

222 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

223 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	55.5
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.9**
Right Flare	(%)	5.7
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

224 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
44

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.9
Right Flare	(%)	7.7
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : St. Michelle Dr *and* Goosecross Dr **$16,500.00**

NE Perpendicular

242 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.4**
Right Flare	(%)	4.8
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Parallel

243 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
35

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	84.0	84.0
Length of Ramp / Pad	(in)	60.0	70.0
Slope of the Ramp / Pad	(%)	5.6	6.8
X Slope of the Ramp / Pad	(%)	1.2	1.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	0.2
Top Landing X Slope	(%)	1.5	1.2

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	0.8
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.2	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

241 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.2
Right Flare	(%)	7.4
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.0	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : St. Michelle Dr and Stadium Rd **$6,750.00**

Total Costs for Curb Ramps along : **St. Michelle Dr** **$23,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	668	St. Montelena Dr	Goosecross Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

219 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.5
Right Flare	(%)	5.4
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

220 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.2**
Right Flare	(%)	7.8
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

218 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.8

Left Flare	(%)	8.5
Right Flare	(%)	4.4
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

221 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	55.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.4
Right Flare	(%)	8.4
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **St. Montelena Dr** ***and*** **Goosecross Dr** **$22,750.00**

Total Costs for Curb Ramps along : **St. Montelena Dr** **$22,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	644	Stadium Rd	Crown Terrace

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

309 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
135

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

310 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.4
Right Flare	(%)	6.4
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

311 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.3
Right Flare	(%)	3.7
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.1 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stadium Rd *and* Crown Terrace **$7,000.00**

NE Perpendicular

414 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	59.5
Length of Ramp / Pad	(in)	60.5
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.5
Right Flare	(%)	8.6
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

413 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
53

Width of Ramp / Pad	(in)	58.5
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	7.4
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

412 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Stadium Rd and Deerwood Dr **$6,250.00**

NE Perpendicular

34 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
86

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.0
Right Flare	(%)	7.3
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.3 N/A
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

33 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
94

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	**13.4**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**12.0**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.3 N/A
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

32 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	**46.5**
Length of Ramp / Pad	(in)	99.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.9**
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**10.7**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.2 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stadium Rd and Olive Ave **$20,500.00**

ENE No Sidewalk, Curb Ramp Not Required

2858 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNE No Sidewalk, Curb Ramp Not Required

2857 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2856 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.7
Right Flare	(%)	7.6
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.0	0.5
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2854 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.0
Right Flare	(%)	5.9
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2855 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
49

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	2.6
Right Flare	(%)	6.4
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stadium Rd and Pecan Ave **$12,500.00**

NE Perpendicular

2835 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.5
Right Flare	(%)	6.3
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.1 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2836 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.1
Right Flare	(%)	5.2
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	2.8 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2837 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stadium Rd *and* San Andrea Ave **$13,000.00**

NE Perpendicular

2853 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

• *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.6%

• *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.1
Right Flare	(%)	6.6
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.3	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2851 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.3
Right Flare	(%)	3.0
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.1	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

2852 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stadium Rd and San Angelo Ave **$13,000.00**

NE Perpendicular

2848 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
37

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	4.7
Right Flare	(%)	4.5
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2849 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.1
Right Flare	(%)	4.8
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.5 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2850 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Stadium Rd** ***and*** **San Marco Ave** **$13,000.00**

Total Costs for Curb Ramps along : **Stadium Rd** **$85,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1597	Stanford Ave	Lemon Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

3687 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Perpendicular

3686 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.1**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.0
Right Flare	(%)	8.4
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Stanford Ave ***and*** Lemon Ave **$13,500.00**

NE Perpendicular

3681 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.3
Right Flare	(%)	6.2
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3682 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	5.4
Right Flare	(%)	6.6
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3680 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
17

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.2
Right Flare	(%)	5.8
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3683 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.2
Right Flare	(%)	6.5
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stanford Ave and Valencia Ave **$22,500.00**

Total Costs for Curb Ramps along : Stanford Ave **$36,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1526	Stephanie Ln	

NE — Perpendicular

2501 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.5
Right Flare	(%)	8.3
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

2502 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2500 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.8**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**10.7**
Right Flare	(%)	7.8
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stephanie Ln and **$13,000.00**

NE Perpendicular

2499 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.7**
Right Flare	(%)	7.4
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2497 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**3.2**

Left Flare	(%)	9.1
Right Flare	(%)	5.9
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2498 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stephanie Ln and 2360 Stephanie Ln **$13,000.00**

NE Perpendicular

2493 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.6
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2492 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.8
Right Flare	(%)	8.2
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2490 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**13.6**
Right Flare	(%)	6.4
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2491 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.7
Right Flare	(%)	8.9
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Stephanie Ln and Frederick Way **$19,000.00**

Total Costs for Curb Ramps along : **Stephanie Ln** **$45,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1481	Steven Lane	Glade Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

2408 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2407 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.2**
Right Flare	(%)	5.9
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2409 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.2
Right Flare	(%)	7.2
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Steven Lane and Glade Ave **$16,500.00**

NE Perpendicular

2414 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.0
Right Flare	(%)	6.0
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2413 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2415 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	79.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.6
Right Flare	(%)	6.5
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Steven Lane and Kimberly Dr **$20,000.00**

NE Perpendicular

2411 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.6
Right Flare	(%)	8.5
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2412 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.5
Right Flare	(%)	6.2
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

2410 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Steven Lane and Marie Dr $16,500.00

NE Perpendicular

2366 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
11

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	3.9
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.4
Right Flare	(%)	5.6
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.7	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2365 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
13

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.6

Left Flare	(%)	5.4
Right Flare	(%)	6.4
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2367 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
3

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	2.6
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.0
Right Flare	(%)	4.2
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.0	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2364 Ramp Transition

- *As-Built Description:*

  Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
1

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	6.2
Right Flare	(%)	2.4
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.7	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Steven Lane and Pamela Dr **$22,000.00**

Total Costs for Curb Ramps along : Steven Lane **$75,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	566	Strauss Ct	Strauss Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2905 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Curb Ramp Required

2904 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Strauss Ct and Strauss Ct **$14,000.00**

Total Costs for Curb Ramps along : Strauss Ct **$14,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	784	Suburban Ave	Boulder Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1492 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	49.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.7
Right Flare	(%)	8.8
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1493 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 43.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**43.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.3
Right Flare	(%)	9.1
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1491 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
122

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Suburban Ave and Boulder Ave **$20,500.00**

N No Sidewalk, Curb Ramp Not Required

1481 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1482 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 15.2%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	54.0
Slope of the Ramp / Pad	(%)	**15.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.3**
Right Flare	(%)	**11.4**
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1483 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**12.3**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Suburban Ave *and* Riverview Dr **$13,000.00**

NE Perpendicular

1485 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.3**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1486 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	61.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**12.4**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1484 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Suburban Ave and Tragon St **$20,000.00**

Total Costs for Curb Ramps along : Suburban Ave **$53,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	491	Summer Ln	Double Tree Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Under Construction**

1846 Existing Curb Ramp

- *As-Built Description:*

  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
8

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Under Construction

1845 Existing Curb Ramp

- *As-Built Description:*

At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.

- *Proposed Solution:*

Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 **11B-202**
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
8

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

	(y/n)	NO

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1848 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
23

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	9.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	47.0
Top Landing Slope	(%)	2.8
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.6
Right Flare	(%)	9.3
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.2
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.1 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1847 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**10.6**
Right Flare	(%)	7.1
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Summer Ln *and* Double Tree Way **$13,500.00**

NE Perpendicular

1858 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
20

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.1

Left Flare	(%)	8.9
Right Flare	(%)	8.3
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1859 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.4
Right Flare	(%)	7.8
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.2	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1860 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Summer Ln and Timberline Dr **$21,000.00**

Total Costs for Curb Ramps along : Summer Ln **$34,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**199**	**Summer Set Ln**	**Double Tree Way**

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1398 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 0.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.2
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**10.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Curb Ramp Required

1397 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Summer Set Ln** ***and*** **Double Tree Way** **$14,000.00**

NE Perpendicular

1401 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.9
Right Flare	(%)	9.9
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1400 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	8.9
Right Flare	(%)	9.6
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

1399 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Summer Set Ln** ***and*** **Trabon Way** **$21,000.00**

Total Costs for Curb Ramps along : **Summer Set Ln** **$35,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1010	Sundance Ln	Beechwood Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2483 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	11.1
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.8
Top Landing X Slope	(%)	2.3

Left Flare	(%)	6.3
Right Flare	(%)	9.0
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.25
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.8 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

2481 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2482 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 5.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
12

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.7**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.2
Right Flare	(%)	8.6
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sundance Ln *and* Beechwood Way **$16,750.00**

NE Perpendicular

2485 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.9**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.2
Right Flare	(%)	5.1
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2486 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2484 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.0**	
Right Flare	(%)	9.0	
Gutter Slope	(%)	1.5	
Gutter XSlope	(%)	0.1	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.5	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Sundance Ln** ***and*** **Grapewood Way** **$20,000.00**

NE Perpendicular

2479 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
27

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.4
Right Flare	(%)	**11.0**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2478 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**11.0**
Right Flare	(%)	**10.9**
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2480 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sundance Ln** ***and*** **Meadowrest Way** **$20,000.00**

NE No Sidewalk, Curb Ramp Not Required

1654 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1653 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1656 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1655 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sundance Ln** ***and*** **National Ave** **$0.00**

NE Perpendicular

2488 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	4.7
Right Flare	(%)	5.8
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Curb Ramp Required

2489 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2487 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.5
Right Flare	(%)	8.2
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Sundance Ln *and* Plumwood Way** **$20,000.00**

NE No Sidewalk, Curb Ramp Not Required

1671 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1670 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1669 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sundance Ln** ***and*** **Sunnydale St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1705 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1706 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1708 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

1707 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sundance Ln** ***and*** **Third St** **$0.00**

Total Costs for Curb Ramps along : **Sundance Ln** **$76,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	773	Sunnydale St	Autumn Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

1630 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

1629 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1628 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sunnydale St** ***and*** **Autumn Ct** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

1625 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1626 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1627 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Sunnydale St *and* Sunnydale Ct** **$0.00**

***Total Costs for Curb Ramps along :* Sunnydale St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1179	Sunrise Ave	11Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3343 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**12.4**
Right Flare	(%)	9.0
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3345 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
83

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**2.4**

Left Flare	(%)	**10.7**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

3344 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
174

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Driveway

3346 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave *and* 11Th St **$16,750.00**

ENE Perpendicular

3323 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.3**
Right Flare	(%)	8.9
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NNE Perpendicular

3324 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.8
Right Flare	(%)	9.2
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3325 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	8.5
Right Flare	(%)	**11.9**
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3326 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
166

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave *and* Adelaide Ave **$26,500.00**

NE Perpendicular

3288 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.5

Left Flare	(%)	9.4
Right Flare	(%)	5.9
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3289 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
47

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.9
Right Flare	(%)	6.7
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

3287 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
152

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave and Drysdale Way **$16,000.00**

NE Perpendicular

3321 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
92

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	9.5
Right Flare	(%)	7.6
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3320 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
81

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.8
Right Flare	(%)	3.7
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3322 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
71

Width of Ramp / Pad	(in)	85.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.4
Right Flare	(%)	8.1
Gutter Slope	(%)	**5.9**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunrise Ave and Knox Ave **$13,500.00**

NW Curb Ramp Required

3339 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3337 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
69

Width of Ramp / Pad	(in)	91.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.1
Right Flare	(%)	5.6
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3338 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	87.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.8
Right Flare	(%)	**10.8**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave and Lake St **$13,250.00**

NE Perpendicular

3303 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.
- *Notes:* BL Length: 54.0"
  BL Slope: 6.8%

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
82

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.6

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	6.0

Street Grade (Left / Right)	(%)	0.3 N/A
Stop/Yield Control:	(y/n)	Ped Signal Only
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3304 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
56

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.5
Right Flare	(%)	6.5
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.4 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3305 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
77

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.8
Right Flare	(%)	8.6
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.6	1.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunrise Ave and Lilly St **$9,500.00**

N Curb Ramp Required

4280 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
170

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE Perpendicular

4277 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	49.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	**6.9**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.8
Right Flare	(%)	9.3
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

4278 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
75

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.4
Right Flare	(%)	8.2
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

4276 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
94

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**10.6**
Right Flare	(%)	7.5
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4281 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
82

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.3
Right Flare	(%)	8.1
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 3.4
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4279 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
102

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.0
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

4282 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
105

Width of Ramp / Pad	(in)	**42.0**
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.0
Right Flare	(%)	8.7
Gutter Slope	(%)	**14.2**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunrise Ave and S Lake St **$40,500.00**

NW Curb Ramp Required

3329 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3327 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
69

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.4
Right Flare	(%)	6.5
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3328 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
69

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.5
Right Flare	(%)	6.0
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave and Stinson Ave $13,250.00

NE Pedestrian Pad

3284 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
45

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	0.9
X Slope of the Ramp / Pad	(%)	1.5

Gutter Slope	(%)	0.7
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Pedestrian Pad Required

3286 Access Route

- *As-Built Description:*

Pedestrian pad not provided where needed.

- *Proposed Solution:*

Provide a pedestrian pad, including detectable warning surfaces, where required.

Unit Cost **$2000.00**

Priority

152

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Stop Light
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3283 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	102.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.6
Right Flare	(%)	6.7
Gutter Slope	(%)	2.8
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7	0.5
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3285 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

44

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.3
Right Flare	(%)	6.4
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunrise Ave *and* Tozer St **$4,500.00**

ENE Perpendicular

3333 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority

64

Width of Ramp / Pad	(in)	76.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.3
Right Flare	(%)	5.8
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NNE Driveway

3334 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3336 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	82.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.4**
Right Flare	(%)	8.9
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE **Curb Ramp Required**

3335 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Sunrise Ave** ***and*** **Vineyard Ave** **$13,250.00**

Total Costs for Curb Ramps along : **Sunrise Ave** **$167,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	949	Sunset Ave	Accornero Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

813 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
159

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — Perpendicular

814 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 43.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	**43.0**
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**15.9**	
Right Flare	(%)	**14.1**	
Gutter Slope	(%)	**7.4**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	**NO**	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

815 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.3
Right Flare	(%)	8.2
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave *and* Accornero Ave **$13,500.00**

NE Perpendicular

1512 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	50.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	9.4
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.4
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1513 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 15.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
57

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**15.3**
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.4**
Right Flare	(%)	**13.5**
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1515 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**12.4**
Right Flare	(%)	**11.1**
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1514 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**13.3**
Right Flare	(%)	**10.6**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave and Double Tree Way $26,500.00

NE Perpendicular

800 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.8
Right Flare	(%)	7.6
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

801 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 25.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
89

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**25.0**
Top Landing Slope	(%)	**5.6**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.7**
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

802 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
155

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and El Rancho Dr **$14,000.00**

NE Parallel

919 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.4%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
45

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	48.0
Length of Ramp / Pad	(in)	N/A	180.0
Slope of the Ramp / Pad	(%)	N/A	3.5
X Slope of the Ramp / Pad	(%)	N/A	1.2
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.8
Top Landing X Slope	(%)	N/A	**2.4**

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	1.9
Bottom Landing X Slope	(%)	0.0
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.8	0.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

920 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 20.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
57

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**20.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.5**
Right Flare	(%)	6.8
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.8	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave and Foster Ave **$10,500.00**

E Perpendicular

1386 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 11.0% Right: 11.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
25

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	101.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.0**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1385 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
31

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	65.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.4
Right Flare	(%)	9.0
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1384 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
32

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.0
Right Flare	(%)	8.9
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Liberty Ln **$16,750.00**

NE Perpendicular

657 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**3.7**
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	7.5
Right Flare	(%)	**10.9**
Gutter Slope	(%)	**6.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	4.1 1.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

656 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.2
Right Flare	(%)	5.5
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

658 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.5%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
36

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.3
Right Flare	(%)	8.2
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.7 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

659 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
31

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.1

Left Flare	(%)	7.3
Right Flare	(%)	8.4
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave *and* Mainberry Dr **$16,500.00**

NE Perpendicular

1620 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 13.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**13.4**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.4
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1619 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

Width of Ramp / Pad	(in)	85.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	65.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**15.4**
Right Flare	(%)	**14.9**
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1621 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
23

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.7
Right Flare	(%)	8.1
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1618 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.5
Right Flare	(%)	8.5
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.1 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave *and* N Granada Dr **$20,000.00**

NE Parallel

790 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
57

		LEFT	RIGHT
Width of Ramp / Pad	(in)	107.0	107.0
Length of Ramp / Pad	(in)	103.0	94.0
Slope of the Ramp / Pad	(%)	4.5	4.4
X Slope of the Ramp / Pad	(%)	1.6	**2.2**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	**2.2**	0.2
Top Landing X Slope	(%)	**2.5**	2.0

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.7 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Parallel

791 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.6% Right: 4.0%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
61

		LEFT	RIGHT
Width of Ramp / Pad	(in)	90.0	86.0
Length of Ramp / Pad	(in)	103.0	90.0
Slope of the Ramp / Pad	(%)	6.6	7.5
X Slope of the Ramp / Pad	(%)	**2.6**	**4.0**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.7
Top Landing X Slope	(%)	**3.3**	**3.4**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	0.4
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.5 1.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

793 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.9%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	91.0	90.0
Length of Ramp / Pad	(in)	112.0	105.0
Slope of the Ramp / Pad	(%)	6.3	5.6
X Slope of the Ramp / Pad	(%)	1.7	**2.9**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.4	0.6
Top Landing X Slope	(%)	1.9	1.5

Bottom Landing Length	(in)	**47.0**
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

792 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
41

		LEFT	RIGHT
Width of Ramp / Pad	(in)	89.0	89.0
Length of Ramp / Pad	(in)	104.0	100.0
Slope of the Ramp / Pad	(%)	8.1	7.2
X Slope of the Ramp / Pad	(%)	1.2	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.0	0.8
Top Landing X Slope	(%)	1.0	1.4

Bottom Landing Length	(in)	**46.0**
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	0.9
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	1.9	0.5
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave and N Schnoor Ave $28,000.00

NE Perpendicular

809 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.6
Right Flare	(%)	6.7
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.5	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

810 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	5.4
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8	0.3
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

811 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**10.4**
Right Flare	(%)	9.5
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW No Sidewalk, Curb Ramp Not Required

812 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave *and* Orchard Ave **$3,250.00**

NE Parallel

969 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 3.5%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	N/A
Length of Ramp / Pad	(in)	154.0	N/A
Slope of the Ramp / Pad	(%)	6.6	N/A
X Slope of the Ramp / Pad	(%)	0.2	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.6	N/A
Top Landing X Slope	(%)	**3.5**	N/A

Bottom Landing Length	(in)	51.0
Bottom Landing Slope	(%)	**3.0**
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.6	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

970 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
59

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.2
Right Flare	(%)	8.9
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	1.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

968 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
137

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Park Ln **$17,500.00**

N No Sidewalk, Curb Ramp Not Required

797 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
59

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

798 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
55

• *As-Built Description:*
Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

• *Proposed Solution:*
Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.2
Right Flare	(%)	8.1
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

799 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
55

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	1.9

Left Flare	(%)	9.6
Right Flare	(%)	7.4
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave *and* Paul Ave **$0.00**

N Island-Cut Through

916 Detectable Warning Surface

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 0.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
46

Width of Ramp / Pad	(in)	119.0
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	0.7
X Slope of the Ramp / Pad	(%)	0.5

Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	0.9	1.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

915 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
37

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 8.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	60.0
Length of Ramp / Pad	(in)	N/A	98.0
Slope of the Ramp / Pad	(%)	N/A	7.9
X Slope of the Ramp / Pad	(%)	N/A	1.7
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.8
Top Landing X Slope	(%)	N/A	1.9

Bottom Landing Length	(in)	120.0
Bottom Landing Slope	(%)	0.4
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.4	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

913 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.8
Right Flare	(%)	**14.1**
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	4.4	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

914 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
33

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.9
Right Flare	(%)	9.4
Gutter Slope	(%)	4.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	2.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave *and* Pine St **$8,000.00**

NE Perpendicular

1673 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
65

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	**4.0**

Left Flare	(%)	6.5
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.7	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1674 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
80

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**3.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**4.3**

Left Flare	(%)	**16.8**
Right Flare	(%)	8.4
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	**3.0**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1672 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
27

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.0

Left Flare	(%)	7.6
Right Flare	(%)	8.5
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1675 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	2.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.2
Right Flare	(%)	8.6
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	2.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave *and* Sundance Ln **$22,000.00**

E Curb Ramp Required

1003 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
137

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Curb Ramp Required

1002 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
137

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Sunset Ave **$14,000.00**

E Perpendicular

990 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	5.3
Right Flare	(%)	**10.7**
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.7	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Curb Ramp Required

989 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
154

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

988 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.4**
Right Flare	(%)	6.9
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1	0.9
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Sunset Ave and W 4Th St **$17,250.00**

NE Perpendicular

1437 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**12.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.3**
Right Flare	(%)	9.6
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1438 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	9.7
Right Flare	(%)	7.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	4.3 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1440 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	**12.6**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1439 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.7**
Right Flare	(%)	9.7
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Westberry Dr **$26,500.00**

NE Perpendicular

819 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.7
Right Flare	(%)	7.9
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 0.6
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

818 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	4.2
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.3
Right Flare	(%)	8.6
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

817 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	**10.5**
Right Flare	(%)	6.6
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

816 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.9
Right Flare	(%)	9.9
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.9 0.7
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Williams Ave **$7,000.00**

NE Perpendicular

821 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Left: 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
53

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.3
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**10.1**
Right Flare	(%)	9.2
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1 1.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

820 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *As-is* 1.0%
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.3
Right Flare	(%)	8.4
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

822 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
45

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.3
Right Flare	(%)	7.7
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Combination

823 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 3.2%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	58.0
Length of Ramp / Pad	(in)	54.0	49.0
Slope of the Ramp / Pad	(%)	5.2	5.5
X Slope of the Ramp / Pad	(%)	**3.2**	1.4
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	1.2
Top Landing X Slope	(%)	N/A	**3.4**

Length of Combo. Ramp	(in)	73.0
Combo. Ramp Slope	(%)	7.4
Combo. Ramp X Slope	(%)	0.9

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(in)	1.6
Bottom Landing X Slope	(in)	0.1
Left Flare	(%)	7.8
Right Flare	(%)	9.7
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 1.8
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Sunset Ave and Willis Ave **$10,250.00**

Total Costs for Curb Ramps along : Sunset Ave **$271,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	34	Susan Ln	Sonora St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

3888 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

3886 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 37.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	120.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.6
Right Flare	(%)	5.7
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.9	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3887 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
61

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	5.4
Right Flare	(%)	**11.3**
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Susan Ln and Sonora St **$20,500.00**

Total Costs for Curb Ramps along : Susan Ln **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1487	Taft Dr	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

1975 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW — Perpendicular

1976 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
24

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**4.0**

Left Flare	(%)	7.7
Right Flare	(%)	2.6
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1977 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.0
Right Flare	(%)	4.9
Gutter Slope	(%)	**8.6**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Taft Dr and **$13,000.00**

Total Costs for Curb Ramps along : Taft Dr **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1466	Tangerine Ave	Citrus Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3701 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
14

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	9.1
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.7
Right Flare	(%)	6.8
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

3699 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

• *As-Built Description:*
Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

• *Proposed Solution:*
Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.3
Right Flare	(%)	6.2
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.2	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

3700 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Tangerine Ave** ***and*** **Citrus Way** **$16,000.00**

SW Curb Ramp Required

3742 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tangerine Ave *and* Mango Ave **$7,000.00**

NE Perpendicular

2998 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.0
Right Flare	(%)	5.6
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3001 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
26

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.1
Right Flare	(%)	7.9
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2999 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
23

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.4

Left Flare	(%)	5.7
Right Flare	(%)	4.8
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3000 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.7
Right Flare	(%)	5.9
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Tangerine Ave *and* Parkwood Ave **$14,000.00**

NE Perpendicular

3684 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.7
Right Flare	(%)	6.5
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3685 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tangerine Ave *and* Stanford Ave **$13,500.00**

E Perpendicular

3716 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.2
Right Flare	(%)	5.4
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

3717 Detectable Warnings

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

• *As-Built Description:*
Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

• *Proposed Solution:*
Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.6
Right Flare	(%)	5.5
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

3719 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
20

• *As-Built Description:*
Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

• *As-is* 4.3%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.8
Right Flare	(%)	5.9
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

3718 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
17

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.5**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.7
Right Flare	(%)	6.2
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Tangerine Ave *and* Valencia Ave** **$11,500.00**

***Total Costs for Curb Ramps along :* Tangerine Ave** **$62,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1250	Terrace Pl	W Central Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

1020 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — No Sidewalk, Curb Ramp Not Required

1019 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1021 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Terrace Pl** ***and*** **W Central Ave** **$0.00**

Total Costs for Curb Ramps along : **Terrace Pl** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1344	Third St	Hilton St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

588 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

587 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

589 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

586 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Third St** ***and*** **Hilton St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

585 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

584 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

582 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

583 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Third St** ***and*** **Krest St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

571 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

568 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

570 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

569 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Third St *and* Shannon Ave** **$0.00**

***Total Costs for Curb Ramps along :* Third St** **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	432	Tiburon Way	Fairfield Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2346 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2348 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.0
Right Flare	(%)	9.1
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2347 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
9

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.1**
Right Flare	(%)	4.6
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Tiburon Way *and* Fairfield Way** **$16,000.00**

NE Perpendicular

1681 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.5
Right Flare	(%)	10.0
Gutter Slope	(%)	**12.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1680 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.6**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.8
Right Flare	(%)	7.7
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1679 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Tiburon Way** ***and*** **Hampton Dr** **$20,000.00**

Total Costs for Curb Ramps along : **Tiburon Way** **$36,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1140	Timberline Dr	Cedar Creek Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1536 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 24.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
72

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**24.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**11.2**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1537 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 38.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	53.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**3.6**
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	**12.9**
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1535 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Timberline Dr** ***and*** **Cedar Creek Ln** **$21,000.00**

E Curb Ramp Required

1865 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1864 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 10.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.6
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1866 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.8
Right Flare	(%)	7.3
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Timberline Dr *and* Ren Way — $16,500.00

E Curb Ramp Required

1688 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1689 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
29

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.4

Left Flare	(%)	9.8
Right Flare	(%)	9.3
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 1.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1690 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
29

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**11.3**
Right Flare	(%)	6.3
Gutter Slope	(%)	**7.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Timberline Dr and Westgate Dr **$20,500.00**

NE Perpendicular

1862 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
22

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.3
Right Flare	(%)	**10.5**
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1863 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
13

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.6
Right Flare	(%)	5.2
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

1861 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Timberline Dr** ***and*** **Winter Way** **$16,500.00**

Total Costs for Curb Ramps along : **Timberline Dr** **$74,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1458	Toledo Way	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2173 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 7.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**7.2**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	6.3
Right Flare	(%)	3.1
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2174 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
34

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	3.7
Right Flare	(%)	8.2
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 3.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

2172 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Toledo Way and **$13,500.00**

E No Sidewalk, Curb Ramp Not Required

2169 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

NW Perpendicular

2170 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
53

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	120.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	6.6
Right Flare	(%)	4.6
Gutter Slope	(%)	**10.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2171 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 7.9%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	4.3
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**7.9**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	7.2
Right Flare	(%)	4.7
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Toledo Way and Raymond Rd **$6,500.00**

Total Costs for Curb Ramps along : Toledo Way **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	466	Toronado Dr	E Cleveland Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1213 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
88

Width of Ramp / Pad	(in)	51.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.0**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	7.8
Right Flare	(%)	5.4
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.8 03
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1212 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
71

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	1.3
Right Flare	(%)	6.1
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 4.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Toronado Dr *and* E Cleveland Ave **$9,500.00**

N No Sidewalk, Curb Ramp Not Required

1237 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1239 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.4
Right Flare	(%)	6.7
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 2.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1238 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	3.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	4.6
Right Flare	(%)	5.3
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Toronado Dr** ***and*** **W Sherwood Way** **$6,000.00**

Total Costs for Curb Ramps along : **Toronado Dr** **$15,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	285	Torres Way	E Lincoln Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1180 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
136

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Parallel

1181 Ramp Landing

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Right: 0.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
45

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	106.0	95.0
Slope of the Ramp / Pad	(%)	5.5	3.8
X Slope of the Ramp / Pad	(%)	1.5	0.5
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	1.0	N/A
Top Landing X Slope	(%)	1.3	N/A

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.7
Bottom Landing X Slope	(%)	0.3
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Parallel

1182 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	98.0	115.0
Slope of the Ramp / Pad	(%)	4.4	4.0
X Slope of the Ramp / Pad	(%)	0.8	0.5
Top Landing Length	(in)	0.0	48.0
Top Landing Slope	(%)	N/A	1.8
Top Landing X Slope	(%)	N/A	2.0

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.5**
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	1.5	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Torres Way *and* E Lincoln Ave** **$14,000.00**

NE Perpendicular

1175 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.8
Right Flare	(%)	8.8
Gutter Slope	(%)	**11.1**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**4.0**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

1176 Ramp Landing

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Right: 0.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.2	66.0
Length of Ramp / Pad	(in)	94.0	95.0
Slope of the Ramp / Pad	(%)	6.4	4.7
X Slope of the Ramp / Pad	(%)	0.0	1.1
Top Landing Length	(in)	48.0	0.0
Top Landing Slope	(%)	0.5	N/A
Top Landing X Slope	(%)	1.3	N/A

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.4**
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	**6.4**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**6.0**

Street Grade (Left / Right)	(%)	0.5	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1174 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
136

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Torres Way and W South St **$13,500.00**

Total Costs for Curb Ramps along : Torres Way **$27,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	592	Toschi Dr	Cherry Tree Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2677 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

• *As-Built Description:*
The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

• *As-is* 10.0"

• *Proposed Solution:*
Relocate the detectable warning surface.

Priority
0

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.5
Right Flare	(%)	5.2
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.0	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2676 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
5

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	5.2
Right Flare	(%)	8.8
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Curb Ramp Required

2678 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Toschi Dr and Cherry Tree Dr **$14,000.00**

NE Perpendicular

2660 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
21

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	9.1
Right Flare	(%)	5.5
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2661 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	6.4
Right Flare	(%)	9.3
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.2 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

2696 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Curb Ramp Required

2662 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2695 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
18

Width of Ramp / Pad	(in)	**46.5**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.7
Right Flare	(%)	6.9
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	1.1	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Toschi Dr *and* Pear Tree Dr **$33,500.00**

NW Curb Ramp Required

2658 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
105

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2659 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
15

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	61.5
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	9.2
Right Flare	(%)	4.9
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2657 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
13

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**12.1**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.4
Right Flare	(%)	7.1
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Toschi Dr and W Almond Ave **$20,000.00**

Total Costs for Curb Ramps along : **Toschi Dr** **$67,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	348	Tozer St	Cedar St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E **Driveway**

3591 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Tozer St and Cedar St **$0.00**

NE Perpendicular

3589 Gutter

- *As-Built Description:*

The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

Priority
22

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.0

Left Flare	(%)	5.7
Right Flare	(%)	7.2
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3590 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3588 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	2.3
Right Flare	(%)	8.5
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tozer St and Lada Ave **$16,500.00**

NE No Sidewalk, Curb Ramp Not Required

3463 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3462 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
70

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	3.1
Right Flare	(%)	7.3
Gutter Slope	(%)	**11.2**
Gutter XSlope	(%)	**3.4**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	3.8 0.6
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3461 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.9

Left Flare	(%)	6.7
Right Flare	(%)	5.6
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tozer St and Mira Loma Way **$9,750.00**

E Driveway

3592 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : Tozer St and Mono St **$0.00**

Total Costs for Curb Ramps along : Tozer St **$26,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	790	Trabon Way	Double Tree Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1458 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**2.5**

Left Flare	(%)	**11.3**
Right Flare	(%)	6.0
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.7	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1459 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
16

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	9.9
Right Flare	(%)	9.4
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1457 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Trabon Way and Double Tree Way **$20,500.00**

Total Costs for Curb Ramps along : Trabon Way **$20,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	137	Trail Way	Bridge Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3389 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.4
Right Flare	(%)	4.7
Gutter Slope	(%)	**11.5**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.9 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3387 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
34

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.6
Right Flare	(%)	3.2
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.1	2.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3388 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Trail Way and Bridge Way **$13,000.00**

NE No Sidewalk, Curb Ramp Not Required

3393 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
12

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3390 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
55

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	5.0
Right Flare	(%)	6.9
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	1.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

3392 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
12

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3391 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 10.0%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.5
Right Flare	(%)	1.0
Gutter Slope	(%)	**7.5**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Trail Way *and* Rd 28** **$13,000.00**

***Total Costs for Curb Ramps along :* Trail Way** **$26,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1024	Trevor Way	Stephanie Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

2520 Ramp Slope

- *As-Built Description:*

  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.7%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.7**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	2.0

Left Flare	(%)	7.1
Right Flare	(%)	6.4
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2519 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
46

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.3
Right Flare	(%)	5.6
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

2518 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Trevor Way** ***and*** **Stephanie Ln** **$16,500.00**

Total Costs for Curb Ramps along : **Trevor Way** **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1514	Truman Dr	Pierce Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW Perpendicular

1939 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
19

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	5.2
Right Flare	(%)	6.8
Gutter Slope	(%)	**15.3**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

1940 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Truman Dr and Pierce Ln **$10,250.00**

NE Perpendicular

1971 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
26

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	7.4
Right Flare	(%)	2.7
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**3.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	3.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1972 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	2.5
Right Flare	(%)	0.3
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

1970 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Truman Dr** ***and*** **Taft Dr** **$13,500.00**

Total Costs for Curb Ramps along : **Truman Dr** **$23,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	427	Tulare St	Daulton Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

4095 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
146

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

4094 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Tulare St** ***and*** **Daulton Ave** **$7,000.00**

E Curb Ramp Required

2229 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2231 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	2.7
Right Flare	(%)	**10.3**
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2230 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
78

Width of Ramp / Pad	(in)	**40.0**
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**14.1**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**10.0**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tulare St and E Clark St **$20,500.00**

NE Perpendicular

4097 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.9
Right Flare	(%)	7.0
Gutter Slope	(%)	**10.4**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.5 2.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

4099 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	85.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.1
Right Flare	(%)	9.8
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.1 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

4096 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.7
Right Flare	(%)	6.3
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	0.4 0.9
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

4098 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 18.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	**18.0**
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	8.8
Right Flare	(%)	6.3
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	2.8 3.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tulare St *and* E Lincoln Ave **$28,000.00**

NE Perpendicular

2204 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	4.7
Right Flare	(%)	5.2
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2205 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 3.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**3.3**

Left Flare	(%)	9.5
Right Flare	(%)	2.5
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

2203 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tulare St and E Sherwood Way **$6,500.00**

NE No Sidewalk, Curb Ramp Not Required

2208 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2207 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

2206 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tulare St *and* Mission Ave **$0.00**

NE Perpendicular

2220 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	62.5
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	**3.4**

Left Flare	(%)	5.4
Right Flare	(%)	**11.0**
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	**4.2**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2219 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.9**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.5
Right Flare	(%)	2.6
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

2218 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tulare St and Tulare St **$13,000.00**

NE Perpendicular

2223 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
36

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**4.2**

Left Flare	(%)	5.6
Right Flare	(%)	8.8
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 4.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2222 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
39

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	**12.2**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	**3.9**

Left Flare	(%)	8.5
Right Flare	(%)	5.4
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.4 1.3
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **No Sidewalk, Curb Ramp Not Required**

2221 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Tulare St** ***and*** **Wrenwood Way** **$13,000.00**

Total Costs for Curb Ramps along : **Tulare St** **$88,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	355	Tyler Ln	Coolidge St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1985 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.2%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.2**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	4.9
Right Flare	(%)	5.0
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1986 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
16

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.1
Right Flare	(%)	6.6
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1984 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tyler Ln and Coolidge St **$13,500.00**

NE Perpendicular

1994 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
22

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	69.5
Slope of the Ramp / Pad	(%)	1.0
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	6.9
Right Flare	(%)	1.6
Gutter Slope	(%)	**11.6**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Curb Ramp Required

1993 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tyler Ln and Madison Dr **$10,250.00**

NW Perpendicular

1974 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
15

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	3.5
Right Flare	(%)	5.2
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Curb Ramp Required

1973 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Tyler Ln and Truman Dr **$10,250.00**

Total Costs for Curb Ramps along : Tyler Ln **$34,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1175	Ula St	Foster Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

923 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

921 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W **Curb Ramp Required**

922 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Ula St** ***and*** **Foster Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Ula St** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1225	University Ave	Hayes Ct

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

747 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

748 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
37

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.3
Right Flare	(%)	6.0
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	2.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

749 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.9

Left Flare	(%)	**11.1**
Right Flare	(%)	8.3
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : University Ave and Hayes Ct **$20,000.00**

NE Perpendicular

741 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	**2.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.2
Right Flare	(%)	4.6
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

740 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 45.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**45.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	8.7
Right Flare	(%)	**10.1**
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

742 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
63

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	6.5
Right Flare	(%)	**11.1**
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

743 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 11.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.0
Right Flare	(%)	7.4
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : University Ave *and* Orchard Ave **$26,500.00**

N Curb Ramp Required

856 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

858 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.8
Right Flare	(%)	8.1
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

857 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	**3.0**

Left Flare	(%)	9.8
Right Flare	(%)	7.4
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	**3.8**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.5
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : University Ave and Willis Ave **$20,000.00**

Total Costs for Curb Ramps along : **University Ave** **$66,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1470	Valencia Ave	Mango Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

3740 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
20

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.6
Right Flare	(%)	5.9
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3741 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
13

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.1
Right Flare	(%)	5.8
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valencia Ave *and* Mango Ave **$5,500.00**

NE Perpendicular

2989 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	5.7
Right Flare	(%)	8.3
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

2990 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.1
Right Flare	(%)	6.3
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

2992 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.6
Right Flare	(%)	5.4
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

2991 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.3
Right Flare	(%)	5.9
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Valencia Ave *and* Navel Ave** **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

2979 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

NW Perpendicular

2978 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.1

Left Flare	(%)	8.0
Right Flare	(%)	6.7
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	7.0

Street Grade (Left / Right)	(%)	0.6 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2976 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	7.5
Right Flare	(%)	8.5
Gutter Slope	(%)	**10.6**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2977 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.4
Right Flare	(%)	5.9
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	0.6
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valencia Ave *and* Pecan Ave **$6,500.00**

NE Perpendicular

3022 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	7.0
Right Flare	(%)	7.2
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

3021 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.6

Left Flare	(%)	8.8
Right Flare	(%)	7.5
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3019 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	1.3

Left Flare	(%)	9.0
Right Flare	(%)	3.6
Gutter Slope	(%)	0.3
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3020 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.25"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.6

Left Flare	(%)	4.9
Right Flare	(%)	7.4
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Valencia Ave and Perkins Ave $14,000.00

ENE Perpendicular

3720 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
17

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	6.9
Right Flare	(%)	5.6
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 1.0
Stop/Yield Control:	(y/n)	No
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

ESE Perpendicular

3721 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
17

Width of Ramp / Pad	(in)	66.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.0
Right Flare	(%)	5.6
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	0.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NNE Perpendicular

3727 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.3
Right Flare	(%)	5.1
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NNW Perpendicular

3726 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 10.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
23

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.6
Right Flare	(%)	5.1
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.5	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSE Perpendicular

3722 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	86.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	5.4
Right Flare	(%)	4.2
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.5
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SSW Perpendicular

3723 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.6%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
17

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	5.8
Right Flare	(%)	6.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.8
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

WNW Perpendicular

3725 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.6
Right Flare	(%)	3.9
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.4
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

WSW Perpendicular

3724 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
12

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	88.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.8
Right Flare	(%)	6.2
Gutter Slope	(%)	2.0
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valencia Ave *and* San Bruno Ave **$23,000.00**

NE Perpendicular

3713 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
14

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.7
Right Flare	(%)	7.1
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

3714 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 3.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
17

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	3.1

Left Flare	(%)	7.9
Right Flare	(%)	8.3
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	1.1	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Curb Ramp Required

3715 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Valencia Ave and San Ramon Ave **$13,500.00**

NE Perpendicular

2974 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.6
Right Flare	(%)	6.4
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2975 Ramp Transition

- *As-Built Description:*

Flush transition from ramp to gutter not provided.

- *As-is* 0.5"
- *Proposed Solution:*

Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	6.0
Right Flare	(%)	6.0
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2973 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.2
Right Flare	(%)	5.4
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	10 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2972 Ramp Transition

- *As-Built Description:*
  Flush transition from ramp to gutter not provided.
- *As-is* 0.25"
- *Proposed Solution:*
  Modify elements (ramp, gutter, landing, route) as required to provide flush transition from ramp to gutter.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
PROWAG **R304.5.2**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.3
Right Flare	(%)	6.7
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Valencia Ave and Saunders Ave **$14,000.00**

Total Costs for Curb Ramps along : **Valencia Ave** **$90,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1191	Valley Way	National Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

1657 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1659 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
35

Width of Ramp / Pad	(in)	84.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.6
Right Flare	(%)	6.8
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1658 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
35

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	**2.3**

Left Flare	(%)	7.0
Right Flare	(%)	7.0
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valley Way *and* National Ave — $13,500.00

E Curb Ramp Required

1594 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1595 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	3.6
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	4.6
Right Flare	(%)	1.4
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1596 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	3.7
Right Flare	(%)	5.3
Gutter Slope	(%)	2.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valley Way and Pinewood Dr **$21,000.00**

N No Sidewalk, Curb Ramp Not Required

1591 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1593 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 0.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	5.0
Right Flare	(%)	7.0
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1592 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**7.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.9
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	1.0.
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Valley Way *and* Riverview Dr **$13,500.00**

NE No Sidewalk, Curb Ramp Not Required

1710 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1709 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1711 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Valley Way** ***and*** **Third St** **$0.00**

NE Perpendicular

1668 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 6.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
32

Width of Ramp / Pad	(in)	84.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	6.1
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	52.0
Top Landing Slope	(%)	**6.2**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	8.2
Right Flare	(%)	5.1
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1667 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
36

Width of Ramp / Pad	(in)	**44.0**
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	6.3
Right Flare	(%)	2.3
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

1666 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Valley Way** ***and*** **Willow Ct** **$17,250.00**

Total Costs for Curb Ramps along : **Valley Way** **$65,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1565	Varbella Pk	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Perpendicular

3037 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 13.9%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**13.9**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.8
Right Flare	(%)	8.7
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NE — Curb Ramp Required

3040 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3038 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		N/A

SW Perpendicular

3039 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
36

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	6.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.4
Right Flare	(%)	6.0
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	2.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Varbella Pk and **$16,500.00**

NE Perpendicular

3175 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
32

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**13.3**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.1
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.9
Right Flare	(%)	9.3
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

3176 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3177 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.2

Left Flare	(%)	10.0
Right Flare	(%)	6.6
Gutter Slope	(%)	1.9
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : **Varbella Pk** ***and*** **Las Casas Ln** **$20,000.00**

Total Costs for Curb Ramps along : **Varbella Pk** **$36,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1161	Venturi Ave	El Rancho Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

780 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

781 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

782 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Venturi Ave** ***and*** **El Rancho Dr** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

783 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

785 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

784 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

786 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
47

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Venturi Ave *and* N Schnoor Ave $0.00

NE Perpendicular

680 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	10.0
Right Flare	(%)	**13.7**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

681 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.1**
Right Flare	(%)	9.8
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Venturi Ave and Shannon Ave **$13,500.00**

Total Costs for Curb Ramps along : Venturi Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	177	Verde Mesa Way	Corona Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

3452 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 11.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	6.8
Right Flare	(%)	4.7
Gutter Slope	(%)	**11.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.5	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

3450 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	47.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.0

Left Flare	(%)	4.7
Right Flare	(%)	7.3
Gutter Slope	(%)	11.8
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	0.5 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Curb Ramp Required

3451 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Verde Mesa Way and Corona Dr **$16,500.00**

Total Costs for Curb Ramps along : Verde Mesa Way **$16,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	155	Via Cerioni	Sunset Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE **Perpendicular**

1436 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 38.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
24

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	4.7
Right Flare	(%)	7.1
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1433 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
31

Width of Ramp / Pad	(in)	56.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.7
Right Flare	(%)	6.3
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 2.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1435 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**14.9**
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**13.1**
Right Flare	(%)	**10.7**
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1434 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
39

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**13.6**
X Slope of the Ramp / Pad	(%)	**3.1**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	2.0

Left Flare	(%)	**11.3**
Right Flare	(%)	9.8
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

***Total Costs for Curb Ramps at :* Via Cerioni *and* Sunset Ave** **$28,000.00**

E Curb Ramp Required

1427 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1429 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
14

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	1.7

Left Flare	(%)	9.4
Right Flare	(%)	4.6
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1428 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
16

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**40.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	7.3
Right Flare	(%)	5.9
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Via Cerioni and Via Capitola **$21,000.00**

Total Costs for Curb Ramps along : **Via Cerioni** **$49,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	231	Via Santa Barbara	Caitlan Drive

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1431 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
27

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**4.0**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.8
Right Flare	(%)	7.4
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1432 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 34.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
31

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.6
Right Flare	(%)	5.7
Gutter Slope	(%)	**11.4**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

1430 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		N/A

Total Costs for Curb Ramps at : **Via Santa Barbara** ***and*** **Caitlan Drive** **$14,000.00**

NW Perpendicular

4495 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
8

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.7
Right Flare	(%)	5.1
Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Driveway

4497 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

4496 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
10

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	6.5
Right Flare	(%)	3.7
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Via Santa Barbara** ***and*** **Via Ceroni** **$13,000.00**

Total Costs for Curb Ramps along : **Via Santa Barbara** **$27,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1211	Vineyard Ave	9Th St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

4316 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — No Sidewalk, Curb Ramp Not Required

4318 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

4317 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Vineyard Ave** ***and*** **9Th St** **$0.00**

E No Sidewalk, Curb Ramp Not Required

4359 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
54

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

4358 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

4360 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
46

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Vineyard Ave** ***and*** **Cross St** **$0.00**

E No Sidewalk, Curb Ramp Not Required

3260 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
34

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Perpendicular

3258 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
64

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	7.3
Right Flare	(%)	**15.8**
Gutter Slope	(%)	4.3
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W **Curb Ramp Required**

3259 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
134

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Vineyard Ave** ***and*** **Washington St** **$10,250.00**

Total Costs for Curb Ramps along : **Vineyard Ave** **$10,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1368	W 1St St	N G St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

1008 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Right: 10.3%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
43

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	52.0
Length of Ramp / Pad	(in)	95.0	115.0
Slope of the Ramp / Pad	(%)	2.2	2.5
X Slope of the Ramp / Pad	(%)	1.9	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.4
Top Landing X Slope	(%)	0.8	1.4
Length of Combo. Ramp	(in)	66.0	
Combo. Ramp Slope	(%)	7.6	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	88.0	
Bottom Landing Slope	(in)	**2.5**	
Bottom Landing X Slope	(in)	0.7	
Left Flare	(%)	9.7	
Right Flare	(%)	**10.3**	
Gutter Slope	(%)	**6.2**	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.7	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

1011 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	54.0
Length of Ramp / Pad	(in)	79.0	102.0
Slope of the Ramp / Pad	(%)	2.7	3.0
X Slope of the Ramp / Pad	(%)	1.4	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	1.3
Top Landing X Slope	(%)	**2.1**	**2.8**
Length of Combo. Ramp	(in)	69.0	
Combo. Ramp Slope	(%)	12.0	
Combo. Ramp X Slope	(%)	1.1	
Bottom Landing Length	(in)	104.0	
Bottom Landing Slope	(in)	**2.8**	
Bottom Landing X Slope	(in)	1.4	
Left Flare	(%)	**10.5**	
Right Flare	(%)	9.4	
Gutter Slope	(%)	**6.4**	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.2	1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

1009 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
52

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.2
Left Flare	(%)	**11.5**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**
Street Grade (Left / Right)	(%)	1.9 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1010 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 29.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
58

Width of Ramp / Pad	(in)	4.8
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	29.0
Top Landing Slope	(%)	4.2
Top Landing X Slope	(%)	2.3

Left Flare	(%)	8.3
Right Flare	(%)	9.7
Gutter Slope	(%)	6.0
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	Not Contrasting
Dome Setback	(in)	9.0

Street Grade (Left / Right)	(%)	1.0	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W 1St St and N G St **$24,250.00**

Total Costs for Curb Ramps along : W 1St St **$24,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	930	W 1Sth St	N H St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

1027 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	93.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	**2.2**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	9.6
Right Flare	(%)	**11.6**
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Parallel

1026 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
31

		LEFT	RIGHT
Width of Ramp / Pad	(in)	89.0	N/A
Length of Ramp / Pad	(in)	117.0	N/A
Slope of the Ramp / Pad	(%)	7.0	N/A
X Slope of the Ramp / Pad	(%)	1.0	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	1.1	N/A
Top Landing X Slope	(%)	1.1	N/A

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	1.8
Bottom Landing X Slope	(%)	1.9
Gutter Slope	(%)	**6.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.8 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1025 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 1Sth St and N H St **$10,000.00**

Total Costs for Curb Ramps along : W 1Sth St **$10,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1343	W 2Nd St	N G St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

1004 Ramp Slope

- *As-Built Description:*

Running slope of existing combination ramp run is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	48.0
Length of Ramp / Pad	(in)	N/A	78.0
Slope of the Ramp / Pad	(%)	N/A	6.3
X Slope of the Ramp / Pad	(%)	N/A	**2.6**
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	1.3
Top Landing X Slope	(%)	N/A	**3.5**
Length of Combo. Ramp	(in)	67.0	
Combo. Ramp Slope	(%)	9.0	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	60.0	
Bottom Landing Slope	(in)	**3.3**	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	8.6	
Right Flare	(%)	**10.7**	
Gutter Slope	(%)	**7.6**	
Gutter XSlope	(%)	0.7	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.6	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

1007 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Left: 11.3%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
43

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	N/A
Length of Ramp / Pad	(in)	81.0	N/A
Slope of the Ramp / Pad	(%)	3.8	N/A
X Slope of the Ramp / Pad	(%)	1.6	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.2	N/A
Top Landing X Slope	(%)	0.8	N/A
Length of Combo. Ramp	(in)	79.0	
Combo. Ramp Slope	(%)	8.0	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	103.0	
Bottom Landing Slope	(in)	**2.7**	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**11.3**	
Right Flare	(%)	9.9	
Gutter Slope	(%)	**10.9**	
Gutter XSlope	(%)	1.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

1005 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing combination ramp run exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
52

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	N/A
Length of Ramp / Pad	(in)	64.0	N/A
Slope of the Ramp / Pad	(%)	4.5	N/A
X Slope of the Ramp / Pad	(%)	**2.3**	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.7	N/A
Top Landing X Slope	(%)	**4.9**	N/A
Length of Combo. Ramp	(in)	65.0	
Combo. Ramp Slope	(%)	7.1	
Combo. Ramp X Slope	(%)	**2.4**	
Bottom Landing Length	(in)	60.0	
Bottom Landing Slope	(in)	**2.8**	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	**11.6**	
Right Flare	(%)	**11.2**	
Gutter Slope	(%)	**7.8**	
Gutter XSlope	(%)	0.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.3	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

1006 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	48.0
Length of Ramp / Pad	(in)	N/A	91.0
Slope of the Ramp / Pad	(%)	N/A	4.4
X Slope of the Ramp / Pad	(%)	N/A	0.2
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	1.7
Top Landing X Slope	(%)	N/A	1.0
Length of Combo. Ramp	(in)	61.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	103.0	
Bottom Landing Slope	(in)	1.0	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	8.8	
Right Flare	(%)	8.4	
Gutter Slope	(%)	**5.2**	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W 2Nd St and N G St $24,000.00

E Combination

1031 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at combination ramp run exceed(s) 10%.

- *As-is* Right: 10.3%
- *Proposed Solution:*

Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	73.0
Length of Ramp / Pad	(in)	N/A	70.0
Slope of the Ramp / Pad	(%)	N/A	2.6
X Slope of the Ramp / Pad	(%)	N/A	0.7
Top Landing Length	(in)	**N/A**	48.0
Top Landing Slope	(%)	N/A	0.7
Top Landing X Slope	(%)	N/A	1.3
Length of Combo. Ramp	(in)	60.0	
Combo. Ramp Slope	(%)	7.8	
Combo. Ramp X Slope	(%)	0.5	
Bottom Landing Length	(in)	85.0	
Bottom Landing Slope	(in)	**2.2**	
Bottom Landing X Slope	(in)	1.0	
Left Flare	(%)	10.0	
Right Flare	(%)	**10.3**	
Gutter Slope	(%)	3.5	
Gutter XSlope	(%)	0.3	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	2.7	2.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

1030 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 30.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
78

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	**30.0**
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	**11.9**
Right Flare	(%)	8.2
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

1029 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1028 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 2Nd St and N H St **$14,000.00**

NE No Sidewalk, Curb Ramp Not Required

953 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

954 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

955 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 2Nd St and N Park Dr **$0.00**

Total Costs for Curb Ramps along : W 2Nd St **$38,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1299	W 3Rd St	N G St

Orientation & ID # | **Ramp Type** | **Existing Access Barrier and Proposed Solution** | **Codes / Mitigation Info** | **Measurements**

E Perpendicular

1037 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.4
Right Flare	(%)	9.1
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	3.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

1038 Ramp Width

- *As-Built Description:*

Clear width of ramp run is less than 48". (ADAAG requires 36" min)

- *As-is* Left: 43.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$7000.00**

Priority
43

		LEFT	RIGHT
Width of Ramp / Pad	(in)	**43.0**	N/A
Length of Ramp / Pad	(in)	48.0	N/A
Slope of the Ramp / Pad	(%)	6.0	N/A
X Slope of the Ramp / Pad	(%)	0.9	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.9	N/A
Top Landing X Slope	(%)	0.7	N/A
Length of Combo. Ramp	(in)	60.0	
Combo. Ramp Slope	(%)	7.6	
Combo. Ramp X Slope	(%)	0.3	
Bottom Landing Length	(in)	86.0	
Bottom Landing Slope	(in)	1.4	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	8.8	
Right Flare	(%)	**10.3**	
Gutter Slope	(%)	**10.5**	
Gutter XSlope	(%)	1.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.8	
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

1035 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 4.0%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
63

		LEFT	RIGHT
Width of Ramp / Pad	(in)	87.0	N/A
Length of Ramp / Pad	(in)	72.0	N/A
Slope of the Ramp / Pad	(%)	5.3	N/A
X Slope of the Ramp / Pad	(%)	0.2	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	2.0	N/A
Top Landing X Slope	(%)	**4.0**	N/A
Length of Combo. Ramp	(in)	60.0	
Combo. Ramp Slope	(%)	6.8	
Combo. Ramp X Slope	(%)	1.2	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	**3.2**	
Bottom Landing X Slope	(in)	**2.6**	
Left Flare	(%)	9.7	
Right Flare	(%)	**12.5**	
Gutter Slope	(%)	**10.0**	
Gutter XSlope	(%)	2.0	
Gutter Lip	(in)	**0.5**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	**9.0**	
Street Grade (Left / Right)	(%)	5.1	2.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Curb Ramp Required

1036 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
140

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 3Rd St and N G St **$24,000.00**

E Combination

1033 Ramp Slope

- *As-Built Description:*
  Running slope of existing combination ramp run is less than 5% or greater than 8.3%.
- *As-is* 9.6%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$7000.00**

Priority
51

		LEFT	RIGHT
Width of Ramp / Pad	(in)	73.0	N/A
Length of Ramp / Pad	(in)	54.0	N/A
Slope of the Ramp / Pad	(%)	5.8	N/A
X Slope of the Ramp / Pad	(%)	0.9	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	1.1	N/A
Top Landing X Slope	(%)	1.1	N/A
Length of Combo. Ramp	(in)	61.0	
Combo. Ramp Slope	(%)	9.6	
Combo. Ramp X Slope	(%)	0.1	
Bottom Landing Length	(in)	85.0	
Bottom Landing Slope	(in)	1.7	
Bottom Landing X Slope	(in)	**2.2**	
Left Flare	(%)	8.4	
Right Flare	(%)	8.3	
Gutter Slope	(%)	4.6	
Gutter XSlope	(%)	0.4	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	4.2	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Combination

1034 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	72.0
Length of Ramp / Pad	(in)	N/A	76.0
Slope of the Ramp / Pad	(%)	N/A	6.7
X Slope of the Ramp / Pad	(%)	N/A	**2.9**
Top Landing Length	(in)	**42.0**	48.0
Top Landing Slope	(%)	0.3	2.6
Top Landing X Slope	(%)	**3.1**	1.2
Length of Combo. Ramp	(in)	68.0	
Combo. Ramp Slope	(%)	8.1	
Combo. Ramp X Slope	(%)	1.3	
Bottom Landing Length	(in)	62.0	
Bottom Landing Slope	(in)	**2.9**	
Bottom Landing X Slope	(in)	0.4	
Left Flare	(%)	10.0	
Right Flare	(%)	**11.5**	
Gutter Slope	(%)	**13.0**	
Gutter XSlope	(%)	**2.6**	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	**9.0**	
Street Grade (Left / Right)	(%)	1.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W No Sidewalk, Curb Ramp Not Required

1032 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
40

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W 3Rd St and N H St **$14,000.00**

N No Sidewalk, Curb Ramp Not Required

1086 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Driveway

1085 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 3Rd St and W 3Rd St **$0.00**

Total Costs for Curb Ramps along : W 3Rd St **$38,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1391	W 4Th St	N Gateway Dr

Orientation & ID # E **Parallel**

Ramp Type

Existing Access Barrier and Proposed Solution

1078 Detectable Warning Surface

- *As-Built Description:*

The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)

- *As-is* 8.0"
- *Proposed Solution:*

Relocate the detectable warning surface.

Codes / Mitigation Info

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
58

Measurements

		LEFT	RIGHT
Width of Ramp / Pad	(in)	92.0	80.0
Length of Ramp / Pad	(in)	128.0	115.0
Slope of the Ramp / Pad	(%)	5.1	5.6
X Slope of the Ramp / Pad	(%)	1.1	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.2	0.2
Top Landing X Slope	(%)	0.1	1.6

Bottom Landing Length	(in)	95.0
Bottom Landing Slope	(%)	1.6
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1	3.3
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Parallel

1077 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
60

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 10.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	65.0	65.0
Length of Ramp / Pad	(in)	70.0	92.0
Slope of the Ramp / Pad	(%)	7.3	6.3
X Slope of the Ramp / Pad	(%)	1.9	1.6
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	2.1	0.8
Top Landing X Slope	(%)	1.4	1.9

Bottom Landing Length	(in)	67.0
Bottom Landing Slope	(%)	1.2
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.4	0.1
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Perpendicular

1079 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
63

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 6.3%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.9
Right Flare	(%)	9.4
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2	0.5
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Perpendicular

1080 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
82

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.2**
Right Flare	(%)	9.7
Gutter Slope	(%)	**7.9**
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.3 1.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 4Th St and N Gateway Dr $11,000.00

E Parallel

1098 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
64

		LEFT	RIGHT
Width of Ramp / Pad	(in)	67.0	N/A
Length of Ramp / Pad	(in)	125.0	N/A
Slope of the Ramp / Pad	(%)	6.7	N/A
X Slope of the Ramp / Pad	(%)	1.0	N/A
Top Landing Length	(in)	48.0	N/A
Top Landing Slope	(%)	0.5	N/A
Top Landing X Slope	(%)	0.7	N/A

Bottom Landing Length	(in)	**36.0**
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	1.7
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	2.0 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

1095 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
71

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.3**
Right Flare	(%)	10.0
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	2.0 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Parallel

1097 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing parallel curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* Right: 3.9%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.3.2**

Unit Cost **$3500.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	89.0
Length of Ramp / Pad	(in)	N/A	139.0
Slope of the Ramp / Pad	(%)	N/A	7.9
X Slope of the Ramp / Pad	(%)	N/A	0.7
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	**3.9**
Top Landing X Slope	(%)	N/A	1.9

Bottom Landing Length	(in)	**39.0**
Bottom Landing Slope	(%)	0.6
Bottom Landing X Slope	(%)	1.4
Gutter Slope	(%)	3.8
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.3 0.5
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

1096 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
50

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	9.6
Right Flare	(%)	8.2
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 1.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 4Th St *and* N H St — $17,500.00

E Parallel

987 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	82.0	82.0
Length of Ramp / Pad	(in)	100.0	94.0
Slope of the Ramp / Pad	(%)	7.6	7.6
X Slope of the Ramp / Pad	(%)	1.3	1.8
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	0.9
Top Landing X Slope	(%)	0.3	**2.1**

Bottom Landing Length	(in)	48.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**9.6**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.2 N/A
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Island-Cut Through

986 Compliant Curb Ramp

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority
73

Width of Ramp / Pad	(in)	105.0
Length of Ramp / Pad	(in)	150.0
Slope of the Ramp / Pad	(%)	1.1
X Slope of the Ramp / Pad	(%)	0.2

Gutter Slope	(%)	0.5
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.0	0.3
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE Perpendicular

985 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.9%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	5.9
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.9
Right Flare	(%)	9.1
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

984 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.9%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
74

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	9.1
Gutter Slope	(%)	**8.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Parallel

982 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 2.8%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
78

		LEFT	RIGHT
Width of Ramp / Pad	(in)	84.0	84.0
Length of Ramp / Pad	(in)	104.0	93.0
Slope of the Ramp / Pad	(%)	7.0	6.0
X Slope of the Ramp / Pad	(%)	0.4	**2.8**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	1.0
Top Landing X Slope	(%)	1.4	1.2

Bottom Landing Length	(in)	**4.8**
Bottom Landing Slope	(%)	1.5
Bottom Landing X Slope	(%)	0.5
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1 N/A
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

983 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
64

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.9
Right Flare	(%)	6.7
Gutter Slope	(%)	5.0
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.1 1.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 4Th St and N J St **$17,000.00**

Total Costs for Curb Ramps along : W 4Th St **$45,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	666	W 6th St	S Gateway Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

4262 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
65

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	126.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.5
Right Flare	(%)	8.2
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.2 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N Perpendicular

4259 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
62

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.0
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.1

Left Flare	(%)	6.8
Right Flare	(%)	5.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**13.0**

Street Grade (Left / Right)	(%)	2.3 1.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

4261 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
96

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.2**
Right Flare	(%)	**13.6**
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

4260 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	100.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**3.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.4**
Right Flare	(%)	**12.3**
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W 6th St and S Gateway Dr **$27,500.00**

Total Costs for Curb Ramps along : W 6th St **$27,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	646	W Almond Ave	Hazelnut Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Curb Ramp Required

2633 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
105

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2634 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
9

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	4.1
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	4.5
Right Flare	(%)	6.3
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2632 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
6

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.1**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	5.8
Right Flare	(%)	2.9
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.5**

Street Grade (Left / Right)	(%)	0.5	0.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Almond Ave and Hazelnut Dr **$13,500.00**

Total Costs for Curb Ramps along : W Almond Ave **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1051	W Central Ave	Central Pl

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

830 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

832 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**15.2**
Right Flare	(%)	**14.1**
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

831 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**14.5**
Right Flare	(%)	8.2
Gutter Slope	(%)	**8.0**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 2.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Central Ave *and* Central Pl **$20,500.00**

NE No Sidewalk, Curb Ramp Not Required

881 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

880 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

882 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **W Central Ave** ***and*** **Lillian St** **$0.00**

E Curb Ramp Required

1017 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
128

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

1016 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
28

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

1018 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
38

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.8
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.2
Right Flare	(%)	9.1
Gutter Slope	(%)	**6.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Central Ave *and* N G St **$13,500.00**

NE Perpendicular

828 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 36.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
46

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	**2.4**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.5

Left Flare	(%)	7.6
Right Flare	(%)	8.2
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

829 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.2
Right Flare	(%)	9.3
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.9	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

827 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Central Ave and Orchard Ave **$20,500.00**

NE Perpendicular

838 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 38.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
57

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**11.9**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**38.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	5.4
Right Flare	(%)	**12.0**
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NE No Sidewalk, Curb Ramp Not Required

884 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

837 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	**35.0**
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	**3.6**
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**11.5**
Right Flare	(%)	**11.2**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

883 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

836 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

885 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Central Ave and Riverview Dr **$21,000.00**

Total Costs for Curb Ramps along : W Central Ave **$75,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	380	W Clark St	Country Club Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Parallel			

3868 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 4.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	53.0
Length of Ramp / Pad	(in)	57.0	**42.0**
Slope of the Ramp / Pad	(%)	**9.0**	4.1
X Slope of the Ramp / Pad	(%)	**4.6**	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.4	1.4
Top Landing X Slope	(%)	**3.2**	0.7

Bottom Landing Length	(in)	57.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4 2.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

3867 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	90.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	4.4
Right Flare	(%)	7.5
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	4.6 0.4
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3869 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.2
Right Flare	(%)	9.1
Gutter Slope	(%)	**12.8**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.4 0.2
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

3866 Ramp Landing

- *As-Built Description:*

  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	89.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.1
Right Flare	(%)	7.7
Gutter Slope	(%)	**11.0**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Clark St and Country Club Dr **$20,000.00**

E Curb Ramp Required

3914 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3916 Ramp Width

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 46.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
49

Width of Ramp / Pad	(in)	**46.0**
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.0
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	62.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.9
Right Flare	(%)	9.5
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

3915 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.4%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.3
Right Flare	(%)	**11.0**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Clark St and Sonora St **$20,000.00**

N Curb Ramp Required

3919 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
142

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

3917 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	72.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	**2.6**

Left Flare	(%)	**10.8**	
Right Flare	(%)	4.3	
Gutter Slope	(%)	**9.1**	
Gutter XSlope	(%)	1.4	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**NO**	

Street Grade (Left / Right)	(%)	0.8	0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

3918 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.5%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.4
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	2.0

Left Flare	(%)	6.4
Right Flare	(%)	6.3
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Clark St and Taylor St **$13,250.00**

Total Costs for Curb Ramps along : W Clark St **$53,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	**1523**	**W Cleveland Ave**	

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2447 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 3.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	10.0
Right Flare	(%)	4.7
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	**2.2**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	4.4	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2448 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
43

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	1.3

Left Flare	(%)	2.6
Right Flare	(%)	5.7
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.6 4.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2445 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.4
Right Flare	(%)	5.7
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2449 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	71.0
Slope of the Ramp / Pad	(%)	**12.4**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.7
Right Flare	(%)	7.1
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.7 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2446 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.6
Right Flare	(%)	6.8
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2450 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	12.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.8
Right Flare	(%)	5.5
Gutter Slope	(%)	7.4
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.75
Truncated Domes	(y/n)	NO

Street Grade (Left / Right)	(%)	0.4	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Cleveland Ave and **$35,750.00**

S Driveway

2477 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Cleveland Ave *and* East Loop $0.00

NE No Sidewalk, Curb Ramp Not Required

2267 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
22

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

2269 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 3.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**3.2**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.9**
Top Landing X Slope	(%)	**3.6**

Left Flare	(%)	6.0
Right Flare	(%)	8.2
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2266 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 7.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
42

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**11.0**
Right Flare	(%)	6.5
Gutter Slope	(%)	**7.8**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

2268 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
112

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2265 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	4.8
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	3.8
Right Flare	(%)	6.2
Gutter Slope	(%)	**7.3**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2270 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
20

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.8
Right Flare	(%)	7.4
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.0	0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Cleveland Ave and Glade Ave **$26,250.00**

NE Parallel

3934 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 5.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
73

		LEFT	RIGHT
Width of Ramp / Pad	(in)	59.0	72.0
Length of Ramp / Pad	(in)	62.0	68.0
Slope of the Ramp / Pad	(%)	1.3	5.3
X Slope of the Ramp / Pad	(%)	1.5	**5.4**
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	**3.0**
Top Landing X Slope	(%)	N/A	**3.6**

Bottom Landing Length	(in)	**42.0**
Bottom Landing Slope	(%)	**6.6**
Bottom Landing X Slope	(%)	1.7
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9 2.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NNW Perpendicular

3935 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
72

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	77.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	66.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.1**
Right Flare	(%)	**10.5**
Gutter Slope	(%)	**9.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	N/A
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

3939 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

Priority
68

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 9.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	81.0
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	52.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.7

Left Flare	(%)	8.7
Right Flare	(%)	7.4
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.4	0.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

3938 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
75

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.8

Left Flare	(%)	10.0
Right Flare	(%)	8.8
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Island-Cut Through

3937 Detectable Warning Surface

CBC 2019 **11B-705.1.2.2**
ADAAG **4.7.7, 4.29.1&2**
ADA-2010 **705.1**

Unit Cost **$500.00**

- *As-Built Description:*
  The detectable warning surface is not located between 6" - 8" from the curb line on a curb ramp or at the edges on a pedestrian island, cut-through median or perpendicular curb ramp. (0" from curb line on a parallel curb ramp.)
- *As-is* 0.0"
- *Proposed Solution:*
  Relocate the detectable warning surface.

Priority
77

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	96.0
Slope of the Ramp / Pad	(%)	0.9
X Slope of the Ramp / Pad	(%)	0.7

Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	1.4 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		3 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

WNW Perpendicular

3936 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3000.00**

- *As-Built Description:*
  The cross slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 2%.
- *As-is* 8.6%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with a cross slope no greater than 2%.

Priority
56

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	68.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	10.0
Right Flare	(%)	9.2
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	**8.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.1
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Cleveland Ave and N Gateway Dr **$24,500.00**

NE Perpendicular

2442 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
38

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.1
Right Flare	(%)	7.3
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**11.0**

Street Grade (Left / Right)	(%)	0.1 0.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

2441 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	82.0
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.1
Right Flare	(%)	8.1
Gutter Slope	(%)	4.5
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.2 0.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

2443 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	**2.1**

Left Flare	(%)	7.7
Right Flare	(%)	7.0
Gutter Slope	(%)	4.0
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	4.0 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

2444 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
60

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	94.2
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	7.9
Right Flare	(%)	7.0
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Cleveland Ave and N Schnoor Ave **$16,000.00**

NE Parallel

3933 Ramp Cross Slope

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.7%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
76

		LEFT	RIGHT
Width of Ramp / Pad	(in)	88.0	88.0
Length of Ramp / Pad	(in)	76.0	76.0
Slope of the Ramp / Pad	(%)	6.3	6.9
X Slope of the Ramp / Pad	(%)	**2.7**	1.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.4
Top Landing X Slope	(%)	**2.3**	**3.0**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.1
Bottom Landing X Slope	(%)	0.6
Gutter Slope	(%)	**9.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.7	N/A
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

3932 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
95

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.8
Right Flare	(%)	9.2
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.1
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Cleveland Ave and Sharon Blvd **$13,500.00**

NE Perpendicular

2453 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
64

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.6
Top Landing X Slope	(%)	1.7

Left Flare	(%)	**16.9**
Right Flare	(%)	**14.2**
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2454 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	**9.0**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**13.1**
Right Flare	(%)	8.8
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	3.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

2451 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
68

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	98.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	8.6
Right Flare	(%)	6.4
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 0.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

2452 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 8.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
73

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.4**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	6.8
Right Flare	(%)	6.2
Gutter Slope	(%)	**9.7**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.4
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Cleveland Ave and Stephanie Ln **$22,750.00**

NW Perpendicular

2476 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.0**
Right Flare	(%)	9.0
Gutter Slope	(%)	**7.4**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2 1.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

2475 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
48

Width of Ramp / Pad	(in)	55.0
Length of Ramp / Pad	(in)	63.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.9
Right Flare	(%)	**13.5**
Gutter Slope	(%)	**7.1**
Gutter XSlope	(%)	**2.9**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Cleveland Ave and Sundance Ln **$9,750.00**

Total Costs for Curb Ramps along : **W Cleveland Ave** **$148,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	414	W El Monte Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — No Sidewalk, Curb Ramp Not Required

359 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

358 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 4.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**4.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	9.0
Right Flare	(%)	5.2
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

357 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.5%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
28

Width of Ramp / Pad	(in)	60.5
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**11.5**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.8

Left Flare	(%)	7.7
Right Flare	(%)	9.0
Gutter Slope	(%)	**10.1**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W El Monte Ct and Monterey St **$13,000.00**

Total Costs for Curb Ramps along : W El Monte Ct **$13,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	924	W Park Dr	Chateau Pl

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

760 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

758 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

759 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* W Park Dr *and* Chateau Pl** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

755 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

756 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Curb Ramp Required

754 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
144

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

757 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Park Dr *and* Claremont Dr **$7,000.00**

NE Perpendicular

644 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 33.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
51

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	**33.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.4
Right Flare	(%)	6.5
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

643 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 3.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	**3.8**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.9
Right Flare	(%)	6.6
Gutter Slope	(%)	**6.8**
Gutter XSlope	(%)	**2.7**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

645 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 34.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
55

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	**5.5**
Top Landing Length	(in)	**34.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**10.2**
Right Flare	(%)	9.0
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

642 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
30

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.5
Right Flare	(%)	5.9
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Park Dr and Mainberry Dr $27,000.00

NE Curb Ramp Required

688 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
125

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

685 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

687 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

686 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
25

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **W Park Dr** ***and*** **N Schnoor Ave** **$7,000.00**

NE No Sidewalk, Curb Ramp Not Required

752 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

751 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

753 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

750 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Park Dr *and* Orchard Ave **$0.00**

NE Perpendicular

689 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**14.8**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	1.6

Left Flare	(%)	**12.0**
Right Flare	(%)	**12.3**
Gutter Slope	(%)	1.0
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

691 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	**14.5**
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**13.7**
Right Flare	(%)	**12.4**
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

690 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Park Dr and Royal Dr **$20,000.00**

E Perpendicular

684 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
53

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**14.7**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

N Curb Ramp Required

682 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Perpendicular

683 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.1%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.1**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**11.5**
Right Flare	(%)	**13.7**
Gutter Slope	(%)	0.0
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.1
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Park Dr and Shannon Ave **$20,500.00**

Total Costs for Curb Ramps along : W Park Dr **$81,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1382	W Roberts Ave	N G St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Combination

1012 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 6.7%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
39

		LEFT	RIGHT
Width of Ramp / Pad	(in)	104.0	53.0
Length of Ramp / Pad	(in)	124.0	84.0
Slope of the Ramp / Pad	(%)	5.8	7.7
X Slope of the Ramp / Pad	(%)	0.2	1.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.5	1.3
Top Landing X Slope	(%)	**6.7**	1.6
Length of Combo. Ramp	(in)	55.0	
Combo. Ramp Slope	(%)	8.3	
Combo. Ramp X Slope	(%)	0.7	
Bottom Landing Length	(in)	125.0	
Bottom Landing Slope	(in)	**3.4**	
Bottom Landing X Slope	(in)	1.4	
Left Flare	(%)	**11.1**	
Right Flare	(%)	**13.3**	
Gutter Slope	(%)	**7.4**	
Gutter XSlope	(%)	0.9	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.0	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

1015 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

• *As-Built Description:*
Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

• *As-is* 35.0"

• *Proposed Solution:*
Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
30

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	8.9
Right Flare	(%)	7.8
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.2 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Combination

1013 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

• *As-Built Description:*
Cross slope of existing parallel curb ramp exceeds 2%.

• *As-is* Left: 2.7%

• *Proposed Solution:*
Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$7000.00**

Priority
33

		LEFT	RIGHT
Width of Ramp / Pad	(in)	67.0	N/A
Length of Ramp / Pad	(in)	**40.0**	N/A
Slope of the Ramp / Pad	(%)	7.3	N/A
X Slope of the Ramp / Pad	(%)	**2.7**	N/A
Top Landing Length	(in)	48.0	**N/A**
Top Landing Slope	(%)	0.8	N/A
Top Landing X Slope	(%)	1.4	N/A

Length of Combo. Ramp	(in)	60.0
Combo. Ramp Slope	(%)	7.9
Combo. Ramp X Slope	(%)	0.3

Bottom Landing Length	(in)	80.0
Bottom Landing Slope	(in)	**4.8**
Bottom Landing X Slope	(in)	1.1
Left Flare	(%)	6.7
Right Flare	(%)	9.2
Gutter Slope	(%)	**9.9**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.9 3.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1014 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
16

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Roberts Ave *and* N G St **$17,500.00**

E Parallel

1024 Ramp Landing

- *As-Built Description:*

Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 40.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	66.0
Length of Ramp / Pad	(in)	N/A	144.0
Slope of the Ramp / Pad	(%)	N/A	7.5
X Slope of the Ramp / Pad	(%)	N/A	1.5
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.5
Top Landing X Slope	(%)	N/A	1.5

Bottom Landing Length	(in)	**40.0**
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	0.7
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	**9.0**

Street Grade (Left / Right)	(%)	0.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N Perpendicular

1023 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.
- *As-is* 2.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
31

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.0**
Top Landing X Slope	(%)	**2.7**

Left Flare	(%)	9.5
Right Flare	(%)	9.3
Gutter Slope	(%)	**5.8**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**Not Contrasting**
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.6 0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1022 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
16

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Roberts Ave and N H St **$10,250.00**

E No Sidewalk, Curb Ramp Not Required

897 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

895 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

899 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Curb Ramp Required

896 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

898 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **W Roberts Ave** ***and*** **N Pine St** **$14,000.00**

Total Costs for Curb Ramps along : **W Roberts Ave** **$41,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	523	W Sherwood Way	Davis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1240 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

1242 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	56.5
Length of Ramp / Pad	(in)	62.5
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	8.0
Right Flare	(%)	5.9
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1241 Detectable Warnings

- *As-Built Description:*

Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.

- *Proposed Solution:*

Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.3
Right Flare	(%)	5.3
Gutter Slope	(%)	4.6
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Sherwood Way and Davis St **$9,000.00**

NE No Sidewalk, Curb Ramp Not Required

2264 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2263 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2261 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2262 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Sherwood Way *and* Fresno St **$0.00**

NE Perpendicular

1337 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
69

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 11.3%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	76.5
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**12.4**
Right Flare	(%)	7.4
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	**2.3**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1336 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
51

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.3

Left Flare	(%)	9.5
Right Flare	(%)	7.8
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3 1.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1338 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
76

Width of Ramp / Pad	(in)	51.5
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.8**
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**13.4**
Right Flare	(%)	**18.3**
Gutter Slope	(%)	**11.9**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.2 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1339 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
61

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	5.4
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	1.4

Left Flare	(%)	**13.4**
Right Flare	(%)	**11.5**
Gutter Slope	(%)	**6.1**
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Sherwood Way and N D St **$22,750.00**

NE No Sidewalk, Curb Ramp Not Required

1234 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

1233 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
35

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1235 Gutter

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
45

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 5.4%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	6.0
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	1.3

Left Flare	(%)	2.4
Right Flare	(%)	6.6
Gutter Slope	(%)	**5.4**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1236 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
47

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.6
Right Flare	(%)	4.7
Gutter Slope	(%)	**5.3**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Sherwood Way *and* Owens St **$9,500.00**

NE Perpendicular

1331 Detectable Warnings

- *As-Built Description:*
  Detectable warning surface not provided where a curb ramp, landing, or blended transition connects to a street.
- *Proposed Solution:*
  Install a truncated dome surface that extends the full width and depth(36" min.) of the curb ramp, excluding the flared sides, inside the grooved border.

CBC 2019 **11B-705.1.2.2**
CBC 2007 **1127B.5.7**
ADAAG **4.7.7**
ADA-2010 **705.1**
PROWAG **R305.1**

Unit Cost **$2500.00**

Priority
35

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	65.5
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.4
Right Flare	(%)	6.2
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.9	0.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

1330 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1332 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
38

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	3.5
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	3.8
Right Flare	(%)	4.8
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1329 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.6%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.5
Slope of the Ramp / Pad	(%)	**8.5**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**4.7**
Top Landing X Slope	(%)	1.8

Left Flare	(%)	5.6
Right Flare	(%)	6.9
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Sherwood Way and Sonora St **$12,250.00**

Total Costs for Curb Ramps along : W Sherwood Way **$53,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	504	W South St	Bloker St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1267 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.
- *Notes:* BL Length: 89.0"
  Slope: 1.9%

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	123.0
Slope of the Ramp / Pad	(%)	5.2
X Slope of the Ramp / Pad	(%)	**2.3**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.6

Left Flare	(%)	89.0
Right Flare	(%)	1.9
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	N/A
Gutter Lip	(in)	N/A
Truncated Domes	(y/n)	**5.8**
Dome Setback	(in)	0.2
		0.0
		YES
		8.0

Street Grade (Left / Right)	(%)	1.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Parallel

1268 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.1%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
38

		LEFT	RIGHT
Width of Ramp / Pad	(in)	48.0	52.0
Length of Ramp / Pad	(in)	118.0	86.0
Slope of the Ramp / Pad	(%)	5.1	7.1
X Slope of the Ramp / Pad	(%)	1.4	1.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.8	0.6
Top Landing X Slope	(%)	**2.1**	0.1

Bottom Landing Length	(in)	77.0
Bottom Landing Slope	(%)	0.5
Bottom Landing X Slope	(%)	1.2
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.8
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.8	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

1266 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
136

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W South St and Bloker St **$17,000.00**

NE Perpendicular

1132 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 5.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	115.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	1.8

Left Flare	(%)	7.4
Right Flare	(%)	8.8
Gutter Slope	(%)	**5.1**
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	08 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1131 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 3.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
67

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	82.5
Slope of the Ramp / Pad	(%)	6.4
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.5

Left Flare	(%)	4.6
Right Flare	(%)	8.7
Gutter Slope	(%)	**10.5**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1129 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 12.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	91.0
Slope of the Ramp / Pad	(%)	6.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.6
Right Flare	(%)	8.6
Gutter Slope	(%)	**12.0**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Parallel

1130 Ramp Landing

- *As-Built Description:*

Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* Left: 0.0"
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
62

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	60.0
Length of Ramp / Pad	(in)	50.0	60.0
Slope of the Ramp / Pad	(%)	3.8	3.8
X Slope of the Ramp / Pad	(%)	0.2	**2.2**
Top Landing Length	(in)	0.0	48.0
Top Landing Slope	(%)	N/A	0.5
Top Landing X Slope	(%)	N/A	**2.1**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	**2.2**
Bottom Landing X Slope	(%)	1.6
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.1 1.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W South St and E Lincoln Ave **$12,750.00**

E Perpendicular

4071 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
92

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	58.0
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	**13.9**
Right Flare	(%)	**15.0**
Gutter Slope	(%)	**12.1**
Gutter XSlope	(%)	1.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.1	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

4072 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
74

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.1**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	3.3
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	1.1	0.1
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

4070 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
84

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	104.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**10.9**
Right Flare	(%)	**11.7**
Gutter Slope	(%)	**6.6**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.2**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**12.0**

Street Grade (Left / Right)	(%)	5.3 5.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W South St and N Lake St **$20,500.00**

NE Perpendicular

1150 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.1%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.6

Left Flare	(%)	5.8
Right Flare	(%)	9.5
Gutter Slope	(%)	**8.1**
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.1 0.2
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1149 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.2%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	75.5
Slope of the Ramp / Pad	(%)	5.6
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	8.7
Right Flare	(%)	9.5
Gutter Slope	(%)	**8.2**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	2.3 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1151 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	96.5
Slope of the Ramp / Pad	(%)	6.9
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**10.3**
Right Flare	(%)	7.5
Gutter Slope	(%)	**5.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.3 0.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1152 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	94.5
Slope of the Ramp / Pad	(%)	6.5
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.6**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.0
Right Flare	(%)	7.9
Gutter Slope	(%)	**10.8**
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.0	3.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W South St *and* Sierra St — $12,500.00

NE Perpendicular

1171 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
62

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.5
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.7**
Right Flare	(%)	6.1
Gutter Slope	(%)	**9.1**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	2.5	0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1172 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 11.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	5.7
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	7.5
Right Flare	(%)	**11.3**
Gutter Slope	(%)	**7.7**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.2	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1170 Gutter

- *As-Built Description:*
  The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.
- *As-is* 8.7%
- *Proposed Solution:*
  Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	8.0
X Slope of the Ramp / Pad	(%)	0.4
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.1
Right Flare	(%)	6.7
Gutter Slope	(%)	**8.7**
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0	0.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1173 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 8.8%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
54

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	5.8
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.9

Left Flare	(%)	6.4
Right Flare	(%)	7.0
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.2 1.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W South St and Sonora St **$12,500.00**

Total Costs for Curb Ramps along : W South St **$75,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	775	W Yosemite Ave	N G St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N **Perpendicular**

1111 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
77

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	107.0
Slope of the Ramp / Pad	(%)	**8.4**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.1**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	8.1
Right Flare	(%)	8.6
Gutter Slope	(%)	**6.5**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	0.2	0.7
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Perpendicular

1109 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.1%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
68

Width of Ramp / Pad	(in)	65.0
Length of Ramp / Pad	(in)	95.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.9

Left Flare	(%)	N/A
Right Flare	(%)	N/A
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**0.0**

Street Grade (Left / Right)	(%)	1.3	N/A
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

1110 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 37.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
68

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	107.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	**37.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.6**
Right Flare	(%)	8.0
Gutter Slope	(%)	2.6
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**5.0**

Street Grade (Left / Right)	(%)	0.4	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Yosemite Ave and N G St **$20,500.00**

ESE Perpendicular

63 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
64

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	65.0
Slope of the Ramp / Pad	(%)	8.1
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.8
Top Landing X Slope	(%)	0.9

Left Flare	(%)	9.4
Right Flare	(%)	6.0
Gutter Slope	(%)	4.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 0.3
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NE Perpendicular

64 Compliant Curb Ramp

Unit Cost **$0.00**

Priority
64

- *As-Built Description:*
  Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.
- *Proposed Solution:*
  Provide routine inspection and maintenance to maintain accessible access route.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	78.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	2.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.8

Left Flare	(%)	9.0
Right Flare	(%)	6.9
Gutter Slope	(%)	4.9
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.0 2.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

65 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
94

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.7**
X Slope of the Ramp / Pad	(%)	**3.5**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**13.4**
Right Flare	(%)	6.7
Gutter Slope	(%)	**8.3**
Gutter XSlope	(%)	1.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.3 1.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Island-Perpendicular

62 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.8%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
76

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	84.0
Slope of the Ramp / Pad	(%)	7.8
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.3
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	6.9
Right Flare	(%)	7.6
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 0.7
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SSW Parallel

60 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
92

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 5.9% Right: 2.6%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	69.0	69.0
Slope of the Ramp / Pad	(%)	7.3	**8.5**
X Slope of the Ramp / Pad	(%)	**5.9**	**2.6**
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.7	0.5
Top Landing X Slope	(%)	**2.8**	0.5

Bottom Landing Length	(in)	58.0
Bottom Landing Slope	(%)	**2.7**
Bottom Landing X Slope	(%)	1.1
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Island-Parallel

61 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4(1)**
PROWAG **R304.3.1**

Unit Cost **$3500.00**

Priority
89

- *As-Built Description:*
  Top landing at existing parallel curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* Right: 20.0"
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	84.0	**40.0**
Slope of the Ramp / Pad	(%)	7.7	**9.0**
X Slope of the Ramp / Pad	(%)	0.9	**2.3**
		48.0	**20.0**
		0.0	2.3
		0.5	**3.0**

Bottom Landing Length	(in)	59.0
Bottom Landing Slope	(%)	0.8
Bottom Landing X Slope	(%)	**2.3**
Gutter Slope	(%)	2.5
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8 0.6
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : W Yosemite Ave and N Q St **$20,250.00**

E Perpendicular

1107 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
85

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	114.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	**2.5**
Top Landing Length	(in)	**35.0**
Top Landing Slope	(%)	1.6
Top Landing X Slope	(%)	1.4

Left Flare	(%)	6.4
Right Flare	(%)	**12.6**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.8 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Curb Ramp Required

1106 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
170

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Parallel

1108 Ramp Cross Slope

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
80

- *As-Built Description:*
  Cross slope of existing parallel curb ramp exceeds 2%.
- *As-is* Right: 4.4%
- *Proposed Solution:*
  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	N/A	59.0
Length of Ramp / Pad	(in)	N/A	200.0
Slope of the Ramp / Pad	(%)	N/A	5.9
X Slope of the Ramp / Pad	(%)	N/A	**4.4**
Top Landing Length	(in)	N/A	48.0
Top Landing Slope	(%)	N/A	0.8
Top Landing X Slope	(%)	N/A	1.0

Bottom Landing Length	(in)	**43.0**
Bottom Landing Slope	(%)	0.9
Bottom Landing X Slope	(%)	1.0
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	N/A
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Yosemite Ave *and* S H St **$21,000.00**

E Combination

154 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
82

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	60.0
Length of Ramp / Pad	(in)	99.0	88.0
Slope of the Ramp / Pad	(%)	3.2	3.7
X Slope of the Ramp / Pad	(%)	1.5	1.4
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.3	0.7
Top Landing X Slope	(%)	**2.8**	1.3

Length of Combo. Ramp	(in)	49.0
Combo. Ramp Slope	(%)	7.5
Combo. Ramp X Slope	(%)	0.1

Bottom Landing Length	(in)	49.0
Bottom Landing Slope	(in)	2.0
Bottom Landing X Slope	(in)	0.9
Left Flare	(%)	8.6
Right Flare	(%)	**11.0**
Gutter Slope	(%)	3.7
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.1	1.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Perpendicular

153 Ramp Width

CBC 2019 **11B-406.5.2**
CBC 2007 **1127B.5.2**
ADAAG **4.7.3**
PROWAG **R304.5.1**

Unit Cost **$6500.00**

Priority
83

- *As-Built Description:*
  Clear width of ramp run is less than 48". (ADAAG requires 36" min)
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	**47.0**
Length of Ramp / Pad	(in)	103.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	53.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**13.8**
Right Flare	(%)	**15.7**
Gutter Slope	(%)	3.9
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	3.0 0.9
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

155 Ramp Flare

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
72

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 14.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	83.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.2

Left Flare	(%)	9.3
Right Flare	(%)	**14.8**
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	0.2 2.0
Stop/Yield Control:	(y/n)	Stop Light
Within Crosswalk	(y/n)	YES
Crosswalks Served:		2 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Perpendicular

156 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Right: 10.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
66

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	87.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.0

Left Flare	(%)	9.1
Right Flare	(%)	**10.2**
Gutter Slope	(%)	3.6
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	4.2	0.2
Stop/Yield Control:	(y/n)	Stop Light	
Within Crosswalk	(y/n)	N/A	
Crosswalks Served:		2 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Yosemite Ave and S I St $16,500.00

E Combination

149 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.7% Right: 3.7%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
71

		LEFT	RIGHT
Width of Ramp / Pad	(in)	66.0	53.0
Length of Ramp / Pad	(in)	86.0	85.0
Slope of the Ramp / Pad	(%)	4.4	4.3
X Slope of the Ramp / Pad	(%)	0.9	0.3
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.1	0.4
Top Landing X Slope	(%)	**2.7**	**3.7**

Length of Combo. Ramp	(in)	90.0
Combo. Ramp Slope	(%)	7.5
Combo. Ramp X Slope	(%)	0.6

Bottom Landing Length	(in)	**36.0**
Bottom Landing Slope	(in)	**2.3**
Bottom Landing X Slope	(in)	0.8
Left Flare	(%)	**10.5**
Right Flare	(%)	**10.2**
Gutter Slope	(%)	2.4
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	8.0

Street Grade (Left / Right)	(%)	1.5	2.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

N Combination

150 Ramp Landing

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
62

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.3%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	90.0	99.0
Slope of the Ramp / Pad	(%)	2.9	4.1
X Slope of the Ramp / Pad	(%)	1.4	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.7	0.9
Top Landing X Slope	(%)	**2.3**	1.5
Length of Combo. Ramp	(in)	77.0	
Combo. Ramp Slope	(%)	7.0	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	51.0	
Bottom Landing Slope	(in)	1.5	
Bottom Landing X Slope	(in)	1.6	
Left Flare	(%)	9.2	
Right Flare	(%)	9.3	
Gutter Slope	(%)	4.3	
Gutter XSlope	(%)	1.5	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.2	4.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

S Combination

152 Ramp Flare

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$7000.00**

Priority
74

- *As-Built Description:*
  Slope of flare(s) along curb at combination ramp run exceed(s) 10%.
- *As-is* Right: 11.1%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	53.0
Length of Ramp / Pad	(in)	52.0	50.0
Slope of the Ramp / Pad	(%)	3.8	3.6
X Slope of the Ramp / Pad	(%)	0.1	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.4
Top Landing X Slope	(%)	1.4	0.8
Length of Combo. Ramp	(in)	80.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	1.2	
Bottom Landing Length	(in)	**40.0**	
Bottom Landing Slope	(in)	1.6	
Bottom Landing X Slope	(in)	**3.3**	
Left Flare	(%)	8.6	
Right Flare	(%)	**11.1**	
Gutter Slope	(%)	**7.9**	
Gutter XSlope	(%)	0.8	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	**Not Contrasting**	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.4	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

W Combination

151 Ramp Landing

- *As-Built Description:*
  Cross slope at top landing of existing parallel curb ramp exceeds 2%.
- *As-is* Left: 2.8%
- *Proposed Solution:*
  Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority
72

		LEFT	RIGHT
Width of Ramp / Pad	(in)	55.0	55.0
Length of Ramp / Pad	(in)	154.0	154.0
Slope of the Ramp / Pad	(%)	3.2	3.6
X Slope of the Ramp / Pad	(%)	0.1	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.5	0.5
Top Landing X Slope	(%)	**2.8**	0.6
Length of Combo. Ramp	(in)	78.0	
Combo. Ramp Slope	(%)	7.0	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	**46.0**	
Bottom Landing Slope	(in)	0.5	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	6.0	
Right Flare	(%)	5.7	
Gutter Slope	(%)	**5.6**	
Gutter XSlope	(%)	0.2	
Gutter Lip	(in)	**1.0**	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**0.0**	
Street Grade (Left / Right)	(%)	2.4	1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Yosemite Ave *and* S J St **$17,500.00**

NE Combination

104 Ramp Slope

- *As-Built Description:*
  Cross slope of an existing combination ramp run exceeds 1:48 (2%).
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new combination curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
68

		LEFT	RIGHT
Width of Ramp / Pad	(in)	54.0	54.0
Length of Ramp / Pad	(in)	81.0	80.0
Slope of the Ramp / Pad	(%)	3.3	4.8
X Slope of the Ramp / Pad	(%)	1.2	0.5
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.1	0.7
Top Landing X Slope	(%)	**2.1**	1.7
Length of Combo. Ramp	(in)	79.0	
Combo. Ramp Slope	(%)	8.0	
Combo. Ramp X Slope	(%)	**2.3**	
Bottom Landing Length	(in)	**37.0**	
Bottom Landing Slope	(in)	1.0	
Bottom Landing X Slope	(in)	0.1	
Left Flare	(%)	**11.5**	
Right Flare	(%)	**12.2**	
Gutter Slope	(%)	5.0	
Gutter XSlope	(%)	1.1	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	0.1	1.2
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Combination

107 Compliant Curb Ramp

- *As-Built Description:*

Curb ramp or blended transition surveyed for the following items are in compliance with the ADA and applicable building codes.

- *Proposed Solution:*

Provide routine inspection and maintenance to maintain accessible access route.

Unit Cost **$0.00**

Priority

60

		LEFT	RIGHT
Width of Ramp / Pad	(in)	60.0	54.0
Length of Ramp / Pad	(in)	119.0	109.0
Slope of the Ramp / Pad	(%)	3.7	3.7
X Slope of the Ramp / Pad	(%)	0.4	0.9
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	1.2	0.7
Top Landing X Slope	(%)	0.5	1.2
Length of Combo. Ramp	(in)	68.0	
Combo. Ramp Slope	(%)	7.5	
Combo. Ramp X Slope	(%)	0.8	
Bottom Landing Length	(in)	48.0	
Bottom Landing Slope	(in)	1.8	
Bottom Landing X Slope	(in)	0.9	
Left Flare	(%)	8.7	
Right Flare	(%)	7.2	
Gutter Slope	(%)	4.0	
Gutter XSlope	(%)	1.2	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	1.2	1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Combination

105 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing parallel curb ramp exceeds 2%.

- *As-is* Right: 3.7%
- *Proposed Solution:*

Demolish existing and provide new top landing sloped at 2% max. Curb ramp to remain.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.5.3**

Unit Cost **$3500.00**

Priority

71

		LEFT	RIGHT
Width of Ramp / Pad	(in)	56.0	53.0
Length of Ramp / Pad	(in)	115.0	100.0
Slope of the Ramp / Pad	(%)	6.5	3.1
X Slope of the Ramp / Pad	(%)	0.8	0.7
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.4
Top Landing X Slope	(%)	1.0	**3.7**
Length of Combo. Ramp	(in)	49.0	
Combo. Ramp Slope	(%)	7.0	
Combo. Ramp X Slope	(%)	0.6	
Bottom Landing Length	(in)	**35.0**	
Bottom Landing Slope	(in)	2.0	
Bottom Landing X Slope	(in)	0.6	
Left Flare	(%)	**10.5**	
Right Flare	(%)	8.7	
Gutter Slope	(%)	**7.3**	
Gutter XSlope	(%)	0.7	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	8.0	
Street Grade (Left / Right)	(%)	3.9	1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Combination

106 Ramp Landing

- *As-Built Description:*

  Bottom landing at existing parallel curb ramp is less than 48" x 48" (60" x ramp width preferred).

- *As-is* 35.0"
- *Proposed Solution:*

  Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.3.2**
CBC 2007 **1127B.5.9**
ADAAG **4.8.4**
PROWAG **R304.3.1**

Unit Cost **$7000.00**

Priority
65

		LEFT	RIGHT
Width of Ramp / Pad	(in)	53.0	64.0
Length of Ramp / Pad	(in)	116.0	92.0
Slope of the Ramp / Pad	(%)	2.7	4.5
X Slope of the Ramp / Pad	(%)	1.1	0.1
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	0.6	0.7
Top Landing X Slope	(%)	1.3	1.3
Length of Combo. Ramp	(in)	49.0	
Combo. Ramp Slope	(%)	6.9	
Combo. Ramp X Slope	(%)	0.2	
Bottom Landing Length	(in)	**35.0**	
Bottom Landing Slope	(in)	**2.2**	
Bottom Landing X Slope	(in)	0.5	
Left Flare	(%)	9.7	
Right Flare	(%)	8.4	
Gutter Slope	(%)	4.2	
Gutter XSlope	(%)	0.6	
Gutter Lip	(in)	0.0	
Truncated Domes	(y/n)	YES	
Dome Setback	(in)	**0.0**	
Street Grade (Left / Right)	(%)	2.0	2.0
Stop/Yield Control:	(y/n)	No	
Within Crosswalk	(y/n)	YES	
Crosswalks Served:		1 X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : W Yosemite Ave and S M St **$17,500.00**

Total Costs for Curb Ramps along : W Yosemite Ave **$113,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1437	Walnut St	Cortopassi St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

3560 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

3561 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

3563 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3562 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Walnut St** ***and*** **Cortopassi St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

3566 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

3564 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 0.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	92.0
Slope of the Ramp / Pad	(%)	**9.5**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	**0.0**
Top Landing Slope	(%)	N/A
Top Landing X Slope	(%)	N/A

Left Flare	(%)	**20.7**
Right Flare	(%)	**13.4**
Gutter Slope	(%)	2.3
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW **No Sidewalk, Curb Ramp Not Required**

3565 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Walnut St** ***and*** **Madera Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Walnut St** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1303	Washington St	Lilly St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E Perpendicular

3254 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
63

Width of Ramp / Pad	(in)	57.0
Length of Ramp / Pad	(in)	67.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.9

Left Flare	(%)	**10.4**
Right Flare	(%)	7.5
Gutter Slope	(%)	**9.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

3257 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S Perpendicular

3255 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

- *Notes:* Large vegetation between ramp and gutter.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**12.4**
Right Flare	(%)	**12.2**
Gutter Slope	(%)	3.2
Gutter XSlope	(%)	2.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7 1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk	(y/n)	Faded
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3256 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Washington St and Lilly St **$13,500.00**

E No Sidewalk, Curb Ramp Not Required

3229 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

N No Sidewalk, Curb Ramp Not Required

3232 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

3230 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

W Curb Ramp Required

3231 Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

• *As-Built Description:*
Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

• *Proposed Solution:*
Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Washington St** ***and*** **Magnolia St** **$7,000.00**

E Perpendicular

3277 Ramp Flare

- *As-Built Description:*
  Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.
- *As-is* Right: 11.5%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
35

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	97.0
Slope of the Ramp / Pad	(%)	5.1
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	7.9
Right Flare	(%)	**11.5**
Gutter Slope	(%)	4.8
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	0.1	1.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S No Sidewalk, Curb Ramp Not Required

3278 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

3279 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Washington St** ***and*** **Malone St** **$3,250.00**

E Perpendicular

3234 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
40

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.6%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.6**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.6

Left Flare	(%)	10.0
Right Flare	(%)	7.8
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	2.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

N No Sidewalk, Curb Ramp Not Required

3235 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Perpendicular

3233 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 8.8%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.8

Left Flare	(%)	8.4
Right Flare	(%)	8.0
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Washington St and Washington Ct **$13,000.00**

Total Costs for Curb Ramps along : Washington St **$36,750.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	669	Wawona Ct	Monterey St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
E	Driveway			

342 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

344 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.4**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.4
Top Landing X Slope	(%)	0.6

Left Flare	(%)	6.2
Right Flare	(%)	6.5
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0 0.7
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

343 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 9.0%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
33

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	56.5
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	5.3
Right Flare	(%)	6.1
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 3.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Wawona Ct and Monterey St **$9,500.00**

Total Costs for Curb Ramps along : **Wawona Ct** **$9,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	393	Wessmith Way	Fresno St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

2245 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

2242 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2244 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2243 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
56

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Wessmith Way** ***and*** **Fresno St** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

2251 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2250 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

2252 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

2253 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Wessmith Way** ***and*** **Merced St** **$0.00**

E Curb Ramp Required

2200 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

2202 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

2201 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
24

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Wessmith Way** ***and*** **Tulare St** **$7,000.00**

Total Costs for Curb Ramps along : **Wessmith Way** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	851	Westberry Bvd	Baron St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

1443 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

1442 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 9.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	57.0
Slope of the Ramp / Pad	(%)	**9.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	**10.8**
Right Flare	(%)	**11.0**
Gutter Slope	(%)	1.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1441 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.8%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
65

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	51.0
Slope of the Ramp / Pad	(%)	**12.8**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**15.0**
Right Flare	(%)	**13.7**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 0.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Westberry Blvd *and* Baron St** **$20,000.00**

E Curb Ramp Required

1528 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1529 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
48

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**10.7**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**11.4**
Right Flare	(%)	**10.8**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5 1.0
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW Perpendicular

1530 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**11.3**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**5.1**
Top Landing X Slope	(%)	1.3

Left Flare	(%)	**11.8**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4 0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Bvd and Cambria Ave **$20,000.00**

NE Perpendicular

1447 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	50.0
Slope of the Ramp / Pad	(%)	6.6
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	59.0
Top Landing Slope	(%)	**2.7**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.4
Right Flare	(%)	6.2
Gutter Slope	(%)	3.5
Gutter XSlope	(%)	**2.4**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.1	2.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1449 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 4.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
44

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	52.0
Slope of the Ramp / Pad	(%)	7.6
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**4.0**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	7.2
Right Flare	(%)	6.3
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	1.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1448 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Blvd *and* Crown Ln — $13,500.00

NE Perpendicular

1869 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
32

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.5
Top Landing X Slope	(%)	0.8

Left Flare	(%)	**10.8**
Right Flare	(%)	7.6
Gutter Slope	(%)	3.0
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SE Perpendicular

1867 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
43

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**10.0**
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	**2.8**

Left Flare	(%)	**10.3**
Right Flare	(%)	**10.4**
Gutter Slope	(%)	1.7
Gutter XSlope	(%)	1.0
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.0	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1868 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Blvd and Ren Way **$21,000.00**

E Curb Ramp Required

1445 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1446 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.9%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
50

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**9.9**
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**13.5**
Right Flare	(%)	9.2
Gutter Slope	(%)	4.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	1.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1444 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 12.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	54.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**12.3**
X Slope of the Ramp / Pad	(%)	0.0
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	**3.0**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	**10.9**
Right Flare	(%)	**12.0**
Gutter Slope	(%)	1.5
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Bvd and State St **$20,000.00**

E Curb Ramp Required

1682 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
118

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1683 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	80.0
Slope of the Ramp / Pad	(%)	**11.8**
X Slope of the Ramp / Pad	(%)	**3.0**
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	1.2

Left Flare	(%)	7.0
Right Flare	(%)	7.4
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1684 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 42.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
32

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	79.0
Slope of the Ramp / Pad	(%)	8.2
X Slope of the Ramp / Pad	(%)	1.6
Top Landing Length	(in)	**42.0**
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	10.0
Right Flare	(%)	7.2
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.6	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Westberry Bvd and Summer Ln **$21,000.00**

E Curb Ramp Required

1450 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1452 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 13.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**13.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.7
Top Landing X Slope	(%)	0.0

Left Flare	(%)	**13.9**
Right Flare	(%)	**12.5**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1451 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**11.2**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**13.6**
Right Flare	(%)	**13.8**
Gutter Slope	(%)	1.2
Gutter XSlope	(%)	1.4
Gutter Lip	(in)	**0.1**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6 0.8
Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Blvd *and* Todd St **$20,500.00**

NE Perpendicular

1686 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
56

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	**12.7**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	0.7
Top Landing X Slope	(%)	0.4

Left Flare	(%)	**10.3**
Right Flare	(%)	**15.1**
Gutter Slope	(%)	1.3
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.0 1.7
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE Perpendicular

1687 Ramp Landing

- *As-Built Description:*
  Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).
- *As-is* 47.0"
- *Proposed Solution:*
  Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
40

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.9
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**13.0**
Right Flare	(%)	**11.1**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Curb Ramp Required

1685 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Westberry Blvd and Westgate Dr **$20,500.00**

Total Costs for Curb Ramps along : Westberry Blvd **$156,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	553	Westgate Dr	Autumn Rd

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1744 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

1743 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1742 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Westgate Dr** ***and*** **Autumn Rd** **$0.00**

NW Curb Ramp Required

1691 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Perpendicular

1692 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	1.7
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	1.0

Left Flare	(%)	9.9
Right Flare	(%)	9.1
Gutter Slope	(%)	**10.2**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Westgate Dr *and* Timberline Dr $14,000.00

E Curb Ramp Required

1693 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW Perpendicular

1695 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 47.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	**2.1**
Top Landing Length	(in)	**47.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	9.3
Right Flare	(%)	10.0
Gutter Slope	(%)	0.7
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1694 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
44

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.8**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.9
Right Flare	(%)	9.1
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	0.3
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Westgate Dr and Westberry Bvd **$20,500.00**

Total Costs for Curb Ramps along : **Westgate Dr** **$34,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1131	Williams Ave	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

518 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE — Curb Ramp Required

513 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
130

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

516 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

514 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

517 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

515 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Williams Ave** ***and*** **Fifth St** **$14,000.00**

E No Sidewalk, Curb Ramp Not Required

485 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

484 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

483 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
42

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Williams Ave *and* Fourth St** **$0.00**

E No Sidewalk, Curb Ramp Not Required

482 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

477 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

480 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

478 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

481 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
30

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

479 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Williams Ave *and* Jennings St $0.00

NE Perpendicular

848 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.3%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Unit Cost **$6500.00**

Priority
54

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	**10.3**
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	49.0
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.1**
Right Flare	(%)	**12.1**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.4	0.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

851 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
52

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.6**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	0.2
Top Landing X Slope	(%)	1.1

Left Flare	(%)	6.0
Right Flare	(%)	7.5
Gutter Slope	(%)	**8.8**
Gutter XSlope	(%)	0.9
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.5	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

849 Ramp Flare

- *As-Built Description:*

Slope of flare(s) along curb at perpendicular curb ramp exceed(s) 10%.

- *As-is* Left: 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.2**
CBC 2007 **1127B.5.3**
ADAAG **4.7.5**
ADA-2010 **406.3**
PROWAG **R304.2.3**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.3
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.4**
Right Flare	(%)	6.7
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2	1.6
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

850 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.7%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	68.0
Slope of the Ramp / Pad	(%)	**9.7**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.7

Left Flare	(%)	7.5
Right Flare	(%)	8.3
Gutter Slope	(%)	0.4
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 0.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Williams Ave and Princeton Ave **$22,750.00**

NE No Sidewalk, Curb Ramp Not Required

446 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

449 Gutter

- *As-Built Description:*

The slope of the gutter area or street at the foot of a curb ramp or blended transition exceeds 1:20 (5%) in the direction of the pedestrian crossing.

- *As-is* 6.3%
- *Proposed Solution:*

Demolish gutter or street area as required and provide 48" x 48" area at foot of curb ramp or blended transition with slope no greater than 5%.

CBC 2019 **11B-406.5.8**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2**
ADA-2010 **406.2**
PROWAG **R304.5.4**

Unit Cost **$3000.00**

Priority
25

Width of Ramp / Pad	(in)	48.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	5.0
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.3
Right Flare	(%)	7.7
Gutter Slope	(%)	**6.3**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**10.0**

Street Grade (Left / Right)	(%)	1.8 3.2
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Within Crosswalk		**<48"**
Crosswalks Served:	(y/n)	2 X-walk
Tee Intersection:		No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

447 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

448 Pedestrian Access Route

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

• *As-Built Description:*
No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

• *Proposed Solution:*
When curb or sidewalk is installed along either street, provide accessible curb ramp.

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		1 X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Williams Ave *and* Third St — $3,000.00

NE Perpendicular

855 Ramp Slope

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

• *As-Built Description:*
Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

• *As-is* 9.2%

• *Proposed Solution:*
Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

Width of Ramp / Pad	(in)	64.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.1

Left Flare	(%)	9.6
Right Flare	(%)	9.8
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

852 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
58

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	**2.9**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	**3.5**

Left Flare	(%)	7.7
Right Flare	(%)	**10.1**
Gutter Slope	(%)	0.1
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

854 Ramp Slope

- *As-Built Description:*

Cross slope of an existing perpendicular curb ramp exceeds 1:48 (2%).

- *As-is* 2.6%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
CBC 2007 **1133B.5.3.1**
ADAAG **4.8.6**
ADA-2010 **405.3**
PROWAG **R304.5.3**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	**2.6**
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.6
Right Flare	(%)	7.0
Gutter Slope	(%)	1.6
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	0.3
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

853 Ramp Landing

- *As-Built Description:*

Cross slope at top landing of existing perpendicular curb ramp exceeds 2%.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
ADA-2010 **405.7**
PROWAG **R304.5.3**

Unit Cost **$3250.00**

Priority
49

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	7.7
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.5**
Top Landing X Slope	(%)	**2.2**

Left Flare	(%)	7.4
Right Flare	(%)	7.2
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	5.5 0.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Williams Ave and University Ave **$22,750.00**

NE No Sidewalk, Curb Ramp Not Required

773 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

774 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

775 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

772 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

***Total Costs for Curb Ramps at :* Williams Ave *and* Venturi Ave** **$0.00**

NE No Sidewalk, Curb Ramp Not Required

762 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

761 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

764 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

763 Pedestrian Access Route

- *As-Built Description:*

  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Williams Ave and W Park Dr **$0.00**

Total Costs for Curb Ramps along : Williams Ave **$62,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	955	Willis Ave	Fifth St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — No Sidewalk, Curb Ramp Not Required

521 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — No Sidewalk, Curb Ramp Not Required

520 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S No Sidewalk, Curb Ramp Not Required

519 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willis Ave and Fifth St **$0.00**

NE No Sidewalk, Curb Ramp Not Required

438 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

439 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

441 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

440 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willis Ave and National Ave **$0.00**

NE No Sidewalk, Curb Ramp Not Required

451 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

450 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

452 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

453 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
20

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willis Ave and Third St **$0.00**

E No Sidewalk, Curb Ramp Not Required

768 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

770 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

771 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

769 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willis Ave and Venturi Ave $0.00

E No Sidewalk, Curb Ramp Not Required

766 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW No Sidewalk, Curb Ramp Not Required

765 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

767 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
44

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willis Ave and W Park Dr **$0.00**

NE No Sidewalk, Curb Ramp Not Required

861 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

860 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
32

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W Curb Ramp Required

859 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
132

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Willis Ave** ***and*** **W Roberts Ave** **$7,000.00**

Total Costs for Curb Ramps along : **Willis Ave** **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	844	Willow Dr	Fall Ave

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — No Sidewalk, Curb Ramp Not Required

1640 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

1642 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW **No Sidewalk, Curb Ramp Not Required**

1641 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Willow Dr** ***and*** **Fall Ave** **$0.00**

N **No Sidewalk, Curb Ramp Not Required**

1643 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NE No Sidewalk, Curb Ramp Not Required

1639 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1638 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
8

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE No Sidewalk, Curb Ramp Not Required

1644 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

1645 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

W No Sidewalk, Curb Ramp Not Required

1637 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
18

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Willow Dr and Holiday Way **$0.00**

Total Costs for Curb Ramps along : Willow Dr **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	311	Wilson Ave	Davis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
NE	Perpendicular			

1221 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 12.5%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
70

Width of Ramp / Pad	(in)	50.0
Length of Ramp / Pad	(in)	55.0
Slope of the Ramp / Pad	(%)	**12.5**
X Slope of the Ramp / Pad	(%)	0.9
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.9**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	7.7
Right Flare	(%)	**12.0**
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	**2.6**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1222 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
62

Width of Ramp / Pad	(in)	49.0
Length of Ramp / Pad	(in)	56.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	1.1

Left Flare	(%)	**10.4**
Right Flare	(%)	5.4
Gutter Slope	(%)	**13.4**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.8	1.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE No Sidewalk, Curb Ramp Not Required

1220 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW Perpendicular

1223 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
59

Width of Ramp / Pad	(in)	49.5
Length of Ramp / Pad	(in)	52.5
Slope of the Ramp / Pad	(%)	**9.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	**10.8**
Right Flare	(%)	7.2
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Wilson Ave and Davis St **$19,500.00**

NE Perpendicular

1206 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
66

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**14.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**3.6**
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.2
Right Flare	(%)	5.3
Gutter Slope	(%)	**5.6**
Gutter XSlope	(%)	**2.1**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	2.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW No Sidewalk, Curb Ramp Not Required

1204 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
41

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SE Parallel

1207 Ramp Cross Slope

- *As-Built Description:*

Cross slope of existing parallel curb ramp exceeds 2%.

- *As-is* Left: 2.1%
- *Proposed Solution:*

Demolish existing and provide new parallel curb ramp including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.7**
ADAAG **4.8.6**
PROWAG **R304.5.3**

Unit Cost **$7000.00**

Priority
50

		LEFT	RIGHT
Width of Ramp / Pad	(in)	52.0	52.0
Length of Ramp / Pad	(in)	70.0	60.5
Slope of the Ramp / Pad	(%)	7.5	5.8
X Slope of the Ramp / Pad	(%)	**2.1**	1.0
Top Landing Length	(in)	48.0	48.0
Top Landing Slope	(%)	N/A	0.2
Top Landing X Slope	(%)	N/A	**2.9**

Bottom Landing Length	(in)	60.0
Bottom Landing Slope	(%)	1.0
Bottom Landing X Slope	(%)	1.3
Gutter Slope	(%)	**8.4**
Gutter XSlope	(%)	0.7
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	YES
Dome Setback	(in)	**8.0**

Street Grade (Left / Right)	(%)	0.6	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW **No Sidewalk, Curb Ramp Not Required**

1205 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
36

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : **Wilson Ave** ***and*** **Owens St** **$13,500.00**

Total Costs for Curb Ramps along : **Wilson Ave** **$33,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	841	Windsox Ct	Paintbrush Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE — Curb Ramp Required

1476 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S — Perpendicular

1475 Ramp Slope

- *As-Built Description:*
  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.
- *As-is* 10.2%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
13

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	**47.0**
Slope of the Ramp / Pad	(%)	**10.2**
X Slope of the Ramp / Pad	(%)	1.5
Top Landing Length	(in)	60.0
Top Landing Slope	(%)	2.0
Top Landing X Slope	(%)	0.5

Left Flare	(%)	**11.1**
Right Flare	(%)	8.8
Gutter Slope	(%)	1.1
Gutter XSlope	(%)	0.6
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	0.9
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

W Perpendicular

1477 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 14.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
16

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	48.0
Slope of the Ramp / Pad	(%)	**14.2**
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.2
Top Landing X Slope	(%)	0.4

Left Flare	(%)	8.8
Right Flare	(%)	**11.4**
Gutter Slope	(%)	0.6
Gutter XSlope	(%)	0.4
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.4	0.8
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Windsox Ct and Paintbrush Dr **$20,000.00**

Total Costs for Curb Ramps along : Windsox Ct **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1130	Winter Way	Kent Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1701 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
35

Width of Ramp / Pad	(in)	63.0
Length of Ramp / Pad	(in)	64.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	1.1
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	**2.4**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	9.8
Right Flare	(%)	9.3
Gutter Slope	(%)	**9.2**
Gutter XSlope	(%)	**2.5**
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.1	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

1700 Ramp Landing

- *As-Built Description:*

Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.2%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
18

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	73.0
Slope of the Ramp / Pad	(%)	7.9
X Slope of the Ramp / Pad	(%)	1.4
Top Landing Length	(in)	52.0
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**11.9**
Right Flare	(%)	9.2
Gutter Slope	(%)	3.4
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	0.0
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.2 0.4
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

S Curb Ramp Required

1699 Access Route

- *As-Built Description:*

Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Winter Way and Kent Dr **$17,250.00**

Total Costs for Curb Ramps along : Winter Way **$17,250.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	165	Wolftrap St	Summer Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NW — Under Construction

1843 Existing Curb Ramp

- *As-Built Description:*
  At time of the survey curb ramp, pedestrian pad, or island is currently under construction and/or renovation.
- *Proposed Solution:*
  Ensure compliance with ADAAG 4.1.6 and CBC 11B -202.

CBC 2019 ***11B-202***
CBC 2007 **1134B.2.1**
ADAAG **4.1.6**

Unit Cost **$0.00**

Priority
8

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

SW — Curb Ramp Required

1844 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
108

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Wolftrap St and Summer Ln **$7,000.00**

Total Costs for Curb Ramps along : Wolftrap St **$7,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1411	Woodlands Dr	Forest Ln

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

1520 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	58.0
Length of Ramp / Pad	(in)	76.0
Slope of the Ramp / Pad	(%)	**9.1**
X Slope of the Ramp / Pad	(%)	0.2
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.4
Top Landing X Slope	(%)	1.0

Left Flare	(%)	8.1
Right Flare	(%)	**10.6**
Gutter Slope	(%)	2.1
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3 2.0
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

NW Perpendicular

1521 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 44.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
60

Width of Ramp / Pad	(in)	52.0
Length of Ramp / Pad	(in)	66.0
Slope of the Ramp / Pad	(%)	**12.0**
X Slope of the Ramp / Pad	(%)	0.6
Top Landing Length	(in)	**44.0**
Top Landing Slope	(%)	**2.2**
Top Landing X Slope	(%)	**7.8**

Left Flare	(%)	**11.9**
Right Flare	(%)	**11.3**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.3
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1523 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 21.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
50

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	69.0
Slope of the Ramp / Pad	(%)	8.3
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**21.0**
Top Landing Slope	(%)	**2.5**
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**10.3**
Right Flare	(%)	9.8
Gutter Slope	(%)	2.2
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.3	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1522 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 32.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
54

Width of Ramp / Pad	(in)	68.0
Length of Ramp / Pad	(in)	75.0
Slope of the Ramp / Pad	(%)	**8.8**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	**32.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	0.3

Left Flare	(%)	**11.9**
Right Flare	(%)	**11.6**
Gutter Slope	(%)	0.9
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.9	1.1
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Woodlands Dr and Forest Ln **$28,000.00**

NE Perpendicular

1516 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 36.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
64

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.0
Slope of the Ramp / Pad	(%)	**10.5**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**36.0**
Top Landing Slope	(%)	**3.2**
Top Landing X Slope	(%)	0.2

Left Flare	(%)	**11.8**
Right Flare	(%)	**13.9**
Gutter Slope	(%)	3.1
Gutter XSlope	(%)	1.7
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.3	1.8
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

NW Perpendicular

1517 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 46.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
67

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	59.0
Slope of the Ramp / Pad	(%)	**12.5**
X Slope of the Ramp / Pad	(%)	0.5
Top Landing Length	(in)	**46.0**
Top Landing Slope	(%)	1.8
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**14.1**
Right Flare	(%)	**15.4**
Gutter Slope	(%)	0.8
Gutter XSlope	(%)	0.0
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.8	0.2
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SE Perpendicular

1519 Ramp Landing

- *As-Built Description:*

Top landing at existing perpendicular curb ramp is less than 48" x 48" (60" length x ramp width preferred).

- *As-is* 39.0"
- *Proposed Solution:*

Demolish existing and provide new, parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4**
ADA-2010 **405.7**
PROWAG **R304.2.1**

Unit Cost **$7000.00**

Priority
44

Width of Ramp / Pad	(in)	60.0
Length of Ramp / Pad	(in)	74.0
Slope of the Ramp / Pad	(%)	**8.7**
X Slope of the Ramp / Pad	(%)	1.2
Top Landing Length	(in)	**39.0**
Top Landing Slope	(%)	1.5
Top Landing X Slope	(%)	0.9

Left Flare	(%)	7.7
Right Flare	(%)	5.3
Gutter Slope	(%)	1.8
Gutter XSlope	(%)	1.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.6	0.4
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	No	
Vertical Curb:		Vertical	

SW Perpendicular

1518 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
46

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**9.3**
X Slope of the Ramp / Pad	(%)	0.8
Top Landing Length	(in)	50.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.9

Left Flare	(%)	8.7
Right Flare	(%)	**10.6**
Gutter Slope	(%)	0.2
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	2.4 1.1
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	No
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Woodlands Dr and Hillcrest Ct **$27,500.00**

Total Costs for Curb Ramps along : Woodlands Dr **$55,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	565	Wrenwood Way	Kern St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

NE Perpendicular

2226 Ramp Slope

- *As-Built Description:*

Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 11.0%
- *Proposed Solution:*

Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
42

Width of Ramp / Pad	(in)	67.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**11.0**
X Slope of the Ramp / Pad	(%)	0.1
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.9
Top Landing X Slope	(%)	0.3

Left Flare	(%)	6.5
Right Flare	(%)	4.5
Gutter Slope	(%)	**6.9**
Gutter XSlope	(%)	1.8
Gutter Lip	(in)	**0.75**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	1.6	1.9
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

NW Perpendicular

2225 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 10.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
34

Width of Ramp / Pad	(in)	93.0
Length of Ramp / Pad	(in)	60.0
Slope of the Ramp / Pad	(%)	**10.4**
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.1
Top Landing X Slope	(%)	0.2

Left Flare	(%)	5.0
Right Flare	(%)	6.6
Gutter Slope	(%)	2.7
Gutter XSlope	(%)	0.2
Gutter Lip	(in)	**0.5**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.2	1.7
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

S Curb Ramp Required

2224 Access Route

- *As-Built Description:*

  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.

- *Proposed Solution:*

  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
124

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Wrenwood Way and Kern St **$20,000.00**

Total Costs for Curb Ramps along : Wrenwood Way **$20,000.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	993	Yeager Rd	Falcon Dr

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Driveway

3789 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Width of Ramp / Pad	(in)	
Slope of the Ramp / Pad	(%)	
X Slope of the Ramp / Pad	(%)	

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — No Sidewalk, Curb Ramp Not Required

3791 Pedestrian Access Route

- *As-Built Description:*
  No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.
- *Proposed Solution:*
  When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SW No Sidewalk, Curb Ramp Not Required

3790 Pedestrian Access Route

- *As-Built Description:*

No curb, curb ramp, or sidewalk provided. Pedestrian access route is along the vehicular lane and is not separated by a curb or other cane detectable warning.

- *Proposed Solution:*

When curb or sidewalk is installed along either street, provide accessible curb ramp.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R304.1**

Unit Cost **$0.00**

Priority
0

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Yeager Rd and Falcon Dr **$0.00**

Total Costs for Curb Ramps along : Yeager Rd **$0.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	1046	Zak Way	Diane Way

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

E — Curb Ramp Required

1545 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
120

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

NW — Perpendicular

1546 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.3%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
46

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	61.0
Slope of the Ramp / Pad	(%)	7.2
X Slope of the Ramp / Pad	(%)	0.7
Top Landing Length	(in)	58.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	0.7

Left Flare	(%)	9.6
Right Flare	(%)	**12.4**
Gutter Slope	(%)	**9.0**
Gutter XSlope	(%)	0.1
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.5	1.0
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

1547 Ramp Landing

- *As-Built Description:*

  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.

- *As-is* 2.3%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
43

Width of Ramp / Pad	(in)	59.0
Length of Ramp / Pad	(in)	62.0
Slope of the Ramp / Pad	(%)	7.5
X Slope of the Ramp / Pad	(%)	0.3
Top Landing Length	(in)	57.0
Top Landing Slope	(%)	**2.3**
Top Landing X Slope	(%)	1.2

Left Flare	(%)	**12.0**
Right Flare	(%)	8.5
Gutter Slope	(%)	**8.5**
Gutter XSlope	(%)	0.3
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.8 1.5
Stop/Yield Control:	(y/n)	Yes-Stop Sign
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

Total Costs for Curb Ramps at : Zak Way and Diane Way **$13,500.00**

Total Costs for Curb Ramps along : Zak Way **$13,500.00**

Year Completed	Intersection ID	Survey Street	Cross Street
TBD	630	Zapata St	E Ellis St

Orientation & ID #	Ramp Type	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

N — Curb Ramp Required

2060 Access Route

- *As-Built Description:*
  Curb ramp or blended transition not provided where a pedestrian access route crosses a curb.
- *Proposed Solution:*
  Provide a parallel curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2007 **1127B.5.1**
ADAAG **4.7.1**
PROWAG **R207.1**

Unit Cost **$7000.00**

Priority
100

		LEFT	RIGHT
Width of Ramp / Pad	(in)		
Slope of the Ramp / Pad	(%)		
X Slope of the Ramp / Pad	(%)		

Stop/Yield Control:	(y/n)	No
Crosswalks Served:		No X-walk
Tee Intersection:	(y/n)	Yes
Vertical Curb:		Vertical

SE — Perpendicular

2061 Ramp Landing

- *As-Built Description:*
  Running slope at top landing of existing perpendicular curb ramp exceeds the 1:48 (2%) maximum.
- *As-is* 2.1%
- *Proposed Solution:*
  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.5.3**
CBC 2007 **1127B.5.4**
ADAAG **4.8.4; 4.8.6**
PROWAG **R304.2.2**

Unit Cost **$3250.00**

Priority
12

Width of Ramp / Pad	(in)	62.0
Length of Ramp / Pad	(in)	70.0
Slope of the Ramp / Pad	(%)	7.1
X Slope of the Ramp / Pad	(%)	1.8
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	**2.1**
Top Landing X Slope	(%)	2.0

Left Flare	(%)	6.4
Right Flare	(%)	4.0
Gutter Slope	(%)	**5.5**
Gutter XSlope	(%)	1.2
Gutter Lip	(in)	**0.25**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	0.7	1.6
Stop/Yield Control:	(y/n)	Yes-Stop Sign	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

SW Perpendicular

2062 Ramp Slope

- *As-Built Description:*

  Running slope of existing perpendicular curb ramp is less than 5% or greater than 8.3%.

- *As-is* 9.4%
- *Proposed Solution:*

  Demolish existing and provide new, perpendicular curb ramp, including detectable warning surfaces, and top and bottom landings as required.

CBC 2019 **11B-406.2.1**
CBC 2007 **1127B.5.3**
ADAAG **4.7.2; 4.8.2**
ADA-2010 **405.2**
PROWAG **R304.2.2**

Unit Cost **$6500.00**

Priority
17

Width of Ramp / Pad	(in)	61.0
Length of Ramp / Pad	(in)	72.5
Slope of the Ramp / Pad	(%)	**9.4**
X Slope of the Ramp / Pad	(%)	1.0
Top Landing Length	(in)	48.0
Top Landing Slope	(%)	1.0
Top Landing X Slope	(%)	0.1

Left Flare	(%)	4.7
Right Flare	(%)	6.7
Gutter Slope	(%)	**7.2**
Gutter XSlope	(%)	0.5
Gutter Lip	(in)	**1.0**
Truncated Domes	(y/n)	**NO**

Street Grade (Left / Right)	(%)	3.5	2.5
Stop/Yield Control:	(y/n)	No	
Crosswalks Served:		No X-walk	
Tee Intersection:	(y/n)	Yes	
Vertical Curb:		Vertical	

Total Costs for Curb Ramps at : Zapata St and E Ellis St **$16,750.00**

Total Costs for Curb Ramps along : Zapata St **$16,750.00**

Total Cost for City Curb Ramps: **$19,209,500.00**

APPENDIX E: ACCESS COMPLIANCE SURVEY REPORT OF PEDESTRIAN SIGNALS

City of Madera

Appendix E: Pedestrian Signals Access Compliance Survey Report

December 2023
SSA Project # 20029

NORTHERN CALIFORNIA
180 BUSH STREET, SUITE 1625, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.533.8771
WWW.SWARTHCI.COM

Table of Contents

I. Access Compliance Survey Report
    i. Report Navigation and Legend Abbreviations

II. Pedestrian Signals List

III. Cost Summary

III. Survey Data for Pedestrian Signals

NAVIGATION & LEGEND

December 2023
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

City of Madera Access Compliance Assessment Report - Pedestrian Signals **4th St**

Survey Street (3)	Cross Street (7)
4TH ST	N D ST

ID (1)	Orientation (2)	Existing Access Barrier and Proposed Solution
40	SW	Clear Floor Space

- *As-Built Description:* (4)

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* 2.8% (5)
- *Proposed Solution:* (6)

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

(8) Codes / Mitigation Info

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

(9) Unit Cost: **$7950.00**
(10) Priority: **82**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

(11) Measurements (12)

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.8**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

1. **Locator Number:** Corresponds to a unique database record tied to the specifi pedestrian signal which can be crossreferenced across this database and its corresponding FileMaker Pro and GIS databases.
2. **Orientation:** Corresponds to the specifi corner/pedestrian signal in any given intersection, unique to each corner:
   - NW, SW, SE, and NE are the most commonly used directions;
   - NNE, ENE, ESE, SSE, SSW, WSW, WNW, and NNW identify individual pedestrian signal system in situations involving multiple signal systems at one corner;
   - I-NW, I-NE, I-SW, I-SE, etc, identify pedestrian signal systems located on medians and pedestrian refuge island.
3. **Survey Street:** Survey street name.
4. **As-Built Description:** Description of as-built barrier based on applicable accessibility codes.
5. **As-is Measurement:** Existing condition/dimension featured on the signal system measured as the most severe barrier on the particular signal.
6. **Proposed Solution:** Description of steps necessary to remove barrier and, if applicable, an interim solution or notes.
7. **Cross Street :** Cross/intersecting street name.
8. **Codes / Info:**
   - PROWAG: Guidelines to enforce Federal accessibility standards in the public rights-of-way.
   - ADAAG/ADA 2010: The Federal Standard for accessibility adopted by the Department of Justice.
   - MUTCD The FHWA standards for traffic signs, road surface markings, and signals.
   - CBC 2019 California Building Code
9. **Unit Cost:** Estimated cost specifi solution per one unit. (The fina cost of barrier removal may exceed this estimate based on the year of mitigation, design approach and chosen method of mitigation)
10. **Priority:** Priority number assigned to specifi barrier based on priorization criteria which include: expected frequency of use and severity of the barrier. Measureed on a scale of 0 to 200, with 200 being the highest priority and 0 being the least.
11. **Ped. Signal Features:** Features of the pedestrian signal system measured to determine accessibility.
12. **Measurements:** Existing condition/dimension determined for each pedestrian signal system.
    - (in) measurement in inches
    - (%) measurement in percentage grade
    - **BOLD** text indicate non-compliant dimensions.
    - Normal text indicate compliant dimensions

LEGEND ABBREVIATIONS

ADA	Americans with Disabilities Act
ADAAG	ADA Accessibility Guidelines
E	East
Fig.	Figure
JOB	per one job (lump sum)
lbs.	Pounds
LF	Linear foot
MUTCD	Manual on Uniform Traffic Control Devices
N	North
NE	Northeast
NW	Northwest
NWn	Northwest: North side
NWs	Northwest: South side
POT	Path of travel
PROW	Public Right-of-Way
PROWAG	Public Right-of-Way Accesible Guidelines
Qty	Quantity
REF	Reference; Provided in locations with overlapping issue; indicates no addition cost required for mitigation
S	South
SE	Southeast
SF	Square foot
SW	Southwest
TBD	To be determined
W	West



Figure 1. Orientation map corresponding to the specifi corner/curb ramp in any given intersection.

PEDESTRIAN SIGNAL LIST

December 2023
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

4th St

Intersection:	Orientation:	Specific Item:
4th St and **N D St**		
35	**N**	**Push Button Reach Range**
36	**NE**	**Push Button Reach Range**
41	**NW**	**Push Button Reach Range**
39	**S**	**Push Button Reach Range**
37	**SE**	**Push Button Reach Range**
38	**SW**	**Push Button Reach Range**
42	**W**	**Push Button Reach Range**

Almond Ave

Intersection:	Orientation:	Specific Item:
Almond Ave and **Gateway Dr**		
153	**ENE**	**Push Button Reach Range**
151	**ESE**	**Push Button Reach Range**
154	**NNE**	**Clear Floor Space**
155	**NW**	**Clear Floor Space**
150	**SSE**	**Push Button Reach Range**
152	**SW**	**Push Button Reach Range**

Clinton St

Intersection:	Orientation:	Specific Item:
Clinton St and **Tozer St**		
166	**ENE**	**Clear Floor Space**
167	**ESE**	**Clear Floor Space**
165	**NNE**	**Push Button Reach Range**
164	**NNW**	**Push Button Reach Range**
168	**SSE**	**Clear Floor Space**
169	**SSW**	**Push Button Reach Range**
163	**WNW**	**Push Button Reach Range**
170	**WSW**	**Clear Floor Space**

Country Club Dr

Intersection:	Orientation:	Specific Item:
Country Club Dr and **W Sherwood Way**		
204	**ENE**	**Push Button Reach Range**
205	**ESE**	**Clear Floor Space**
203	**NNE**	**Clear Floor Space**
202	**NNW**	**Push Button Reach Range**
206	**SSE**	**Push Button Reach Range**
199	**SSW**	**Clear Floor Space**
201	**WNW**	**Clear Floor Space**
200	**WSW**	**Color Coding**

E Cleveland Ave

Intersection:	Orientation:	Specific Item:
E Cleveland Ave and **N D St**		

74	**ENE**	**Push Button Reach Range**
75	**ESE**	**Clear Floor Space**
73	**NNE**	**Push Button Reach Range**
72	**NNW**	**Clear Floor Space**
76	**SSE**	**Clear Floor Space**
77	**SSW**	**Push Button Reach Range**
71	**WNW**	**Clear Floor Space**
78	**WSW**	**Clear Floor Space**

E Cleveland Ave and **N Lake St**

240	**ENE**	**Push Button Reach Range**
238	**ESE**	**Clear Floor Space**
239	**NNE**	**Clear Floor Space**
241	**NNW**	**Clear Floor Space**
237	**SSE**	**Push Button Reach Range**
236	**SSW**	**Clear Floor Space**
242	**WNW**	**Clear Floor Space**
235	**WSW**	**Clear Floor Space**

E Cleveland Ave and **Owens St**

70	**ENE**	**Push Button Reach Range**
63	**ESE**	**Clear Floor Space**
69	**NNE**	**Push Button Reach Range**
68	**NNW**	**Push Button Reach Range**
64	**SSE**	**Push Button Reach Range**
65	**SSW**	**Push Button Reach Range**
67	**WNW**	**Push Button Reach Range**
66	**WSW**	**Push Button Reach Range**

E Cleveland Ave and **Tulare St**

246	**ENE**	**Clear Floor Space**
244	**ESE**	**Clear Floor Space**
245	**NNE**	**Clear Floor Space**
248	**NNW**	**Clear Floor Space**
243	**SSE**	**Color Coding**
249	**SSW**	**Push Button Reach Range**
247	**WNW**	**Push Button Reach Range**
250	**WSW**	**Push Button Reach Range**

Golden State Dr

Intersection: Orientation: Specific Item:

Golden State Dr and **Almond Ave**

271	**NW**	**Push Button Reach Range**
270	**SE**	**Clear Floor Space**
269	**SW**	**Push Button Reach Range**

Howard Rd

Intersection: Orientation: Specific Item:

Howard Rd and **Fairview Ave**

116	**ENE**	**Push Button Reach Range**
117	**ESE**	**Push Button Reach Range**

115	**NNE**	**Clear Floor Space**
114	**NW**	**Clear Floor Space**
118	**SSE**	**Clear Floor Space**
119	**SW**	**Clear Floor Space**

Howard Rd and **Granada Dr**

83	**ENE**	**Push Button Reach Range**
88	**ESE**	**Push Button Reach Range**
82	**NNE**	**Push Button Reach Range**
84	**NNW**	**Push Button Reach Range**
89	**SSE**	**Push Button Reach Range**
87	**SSW**	**Clear Floor Space**
85	**WNW**	**Push Button Reach Range**
86	**WSW**	**Clear Floor Space**

Howard Rd and **Pine St**

122	**ENE**	**Push Button Reach Range**
123	**ESE**	**Clear Floor Space**
121	**NNE**	**Clear Floor Space**
120	**NW**	**Clear Floor Space**
124	**SSE**	**Clear Floor Space**
125	**SW**	**Clear Floor Space**

Howard Rd and **Schnoor Ave**

106	**ENE**	**Push Button Reach Range**
113	**ESE**	**Push Button Reach Range**
107	**NNE**	**Push Button Reach Range**
108	**NNW**	**Clear Floor Space**
112	**SSE**	**Clear Floor Space**
111	**SSW**	**Clear Floor Space**
109	**WNW**	**Clear Floor Space**
110	**WSW**	**Clear Floor Space**

Howard Rd and **Shannon Ave**

81	**S**	**Clear Floor Space**

N G St

Intersection:	Orientation:	Specific Item:

N G St and **W 4Th St**

54	**E**	**Push Button Reach Range**
51	**N**	**Push Button Reach Range**
52	**NE**	**Push Button Reach Range**
55	**S**	**Push Button Reach Range**
53	**SE**	**Push Button Reach Range**
57	**SW**	**Push Button Reach Range**
58	**W**	**Push Button Reach Range**

N Schnoor Ave

Intersection:	Orientation:	Specific Item:

N Schnoor Ave and **Foxglove Way**

95	**ENE**	**Clear Floor Space**
96	**ESE**	**Push Button Reach Range**

94	**NNE**	**Push Button Reach Range**
93	**NNW**	**Clear Floor Space**
97	**SSE**	**Push Button Reach Range**
91	**SSW**	**Push Button Reach Range**
92	**WNW**	**Push Button Reach Range**
90	**WSW**	**Push Button Reach Range**

N Schnoor Ave and **Kennedy St**

216	**ENE**	**Clear Floor Space**
217	**ESE**	**Clear Floor Space**
215	**NNE**	**Clear Floor Space**
221	**NNW**	**Push Button Reach Range**
218	**SSE**	**Push Button Reach Range**
219	**SSW**	**Push Button Reach Range**
222	**WNW**	**Push Button Reach Range**
220	**WSW**	**Push Button Reach Range**

Olive Ave

Intersection:	Orientation:	Specific Item:

Olive Ave and

4	**NE**	**Color Coding**
3	**NW**	**Clear Floor Space**

Olive Ave and **Martin St**

12	**N**	**Color Coding**
11	**SE**	**Clear Floor Space**

Olive Ave and **S K St**

13	**NW**	**Clear Floor Space**
14	**SW**	**Color Coding**

Olive Ave and **S L St**

20	**NE**	**Push Button Reach Range**
19	**SE**	**Clear Floor Space**
18	**SSW**	**Color Coding**
17	**WSW**	**Clear Floor Space**

Olive Ave and **Santa Cruz St**

15	**NW**	**Color Coding**
16	**SW**	**Clear Floor Space**

Olive Ave and **Wallace Ave**

162	**NE**	**Color Coding**

S Gateway Dr

Intersection:	Orientation:	Specific Item:

S Gateway Dr and **E 9Th St**

268	**E**	**Clear Floor Space**
266	**NNE**	**Clear Floor Space**
265	**NNW**	**Push Button Reach Range**
267	**W**	**Push Button Reach Range**

S Gateway Dr and **Olive Ave**

158	**NE**	**Clear Floor Space**

159	**NNW**	**Push Button Reach Range**
161	**SW**	**Clear Floor Space**
160	**WNW**	**Clear Floor Space**

St. Michelle Dr

Intersection:	Orientation:	Specific Item:

St. Michelle Dr and **Stadium Rd**

2	**NE**	**Push Button Reach Range**
1	**NW**	**Push Button Reach Range**

Stadium Rd

Intersection:	Orientation:	Specific Item:

Stadium Rd and **Olive Ave**

292	**ESE**	**Push Button Reach Range**
291	**NE**	**Clear Floor Space**
290	**NW**	**Clear Floor Space**
293	**SSE**	**Push Button Reach Range**
288	**SSW**	**Clear Floor Space**
289	**WSW**	**Clear Floor Space**

Stadium Rd and **Pecan Ave**

133	**ENE**	**Clear Floor Space**
126	**ESE**	**Push Button Reach Range**
132	**NNE**	**Push Button Reach Range**
131	**NNW**	**Push Button Reach Range**
127	**SSE**	**Clear Floor Space**
128	**SSW**	**Clear Floor Space**
130	**WNW**	**Push Button Reach Range**
129	**WSW**	**Clear Floor Space**

Sunrise Ave

Intersection:	Orientation:	Specific Item:

Sunrise Ave and **Lilly St**

175	**NE**	**Clear Floor Space**

Sunrise Ave and **Tozer St**

172	**ESE**	**Push Button Reach Range**
173	**NE**	**Clear Floor Space**
171	**SSE**	**Push Button Reach Range**
174	**SW**	**Push Button Reach Range**

Sunset Ave

Intersection:	Orientation:	Specific Item:

Sunset Ave and **Liberty Ln**

79	**E**	**Color Coding**
80	**SW**	**Color Coding**

Valencia Ave

Intersection:	Orientation:	Specific Item:

Valencia Ave and **Pecan Ave**

157	**NW**	**Color Coding**
156	**SW**	**Color Coding**

W 4th St

Intersection:	Orientation:	Specific Item:

W 4th St and **N Gateway Dr**

45	**E**	**Push Button Reach Range**
43	**N**	**Push Button Reach Range**
44	**NW**	**Clear Floor Space**
47	**S**	**Push Button Reach Range**
46	**SE**	**Push Button Reach Range**
48	**SW**	**Push Button Reach Range**
49	**W**	**Clear Floor Space**

W 4th St and **N H St**

59	**E**	**Push Button Reach Range**
61	**N**	**Push Button Reach Range**
60	**S**	**Push Button Reach Range**
62	**W**	**Push Button Reach Range**

W 6th St

Intersection:	Orientation:	Specific Item:

W 6th St and **S Gateway Dr**

263	**NE**	**Push Button Reach Range**
257	**NNE**	**Clear Floor Space**
258	**NNW**	**Push Button Reach Range**
259	**NW**	**Clear Floor Space**
264	**SE**	**Clear Floor Space**
262	**SSE**	**Clear Floor Space**
261	**SSW**	**Color Coding**
260	**SW**	**Push Button Reach Range**

W Clark St

Intersection:	Orientation:	Specific Item:

W Clark St and **Country Club Dr**

196	**ENE**	**Push Button Reach Range**
197	**ESE**	**Clear Floor Space**
195	**NNE**	**Clear Floor Space**
193	**NNW**	**Push Button Reach Range**
198	**SSE**	**Clear Floor Space**
192	**SSW**	**Clear Floor Space**
194	**WNW**	**Push Button Reach Range**
191	**WSW**	**Push Button Reach Range**

W Cleveland Ave

Intersection:	Orientation:	Specific Item:

W Cleveland Ave and **N Gateway Dr**

209	**NE**	**Push Button Reach Range**
210	**NNW**	**Push Button Reach Range**

214	**SE**	**Push Button Reach Range**
212	**SSW**	**Push Button Reach Range**
211	**WNW**	**Push Button Reach Range**
213	**WSW**	**Push Button Reach Range**

W Cleveland Ave and **N Schnoor Ave**

101	**ENE**	**Push Button Reach Range**
102	**ESE**	**Push Button Reach Range**
100	**NNE**	**Clear Floor Space**
98	**NNW**	**Push Button Reach Range**
103	**SSE**	**Clear Floor Space**
104	**SSW**	**Clear Floor Space**
99	**WNW**	**Push Button Reach Range**
105	**WSW**	**Clear Floor Space**

W Cleveland Ave and **Sharon Bvd**

208	**N**	**Clear Floor Space**
207	**S**	**Color Coding**

W Yosemite Ave

Intersection:	Orientation:	Specific Item:

W Yosemite Ave and **N Q St**

24	**ENE**	**Push Button Reach Range**
23	**ESE**	**Push Button Reach Range**
25	**NNE**	**Push Button Reach Range**
26	**NW**	**Push Button Reach Range**
22	**SSE**	**Push Button Reach Range**
21	**SW**	**Push Button Reach Range**

W Yosemite Ave and **S I St**

29	**E**	**Push Button Reach Range**
32	**N**	**Push Button Reach Range**
31	**NE**	**Clear Floor Space**
33	**NW**	**Clear Floor Space**
27	**S**	**Push Button Reach Range**
30	**SE**	**Push Button Reach Range**
28	**SW**	**Push Button Reach Range**
34	**W**	**Push Button Reach Range**

COST SUMMARY

December 2023
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

Total Cost for Street: 4th St		**$51,000.00**
Intersection:	Orientation:	
4th St and **N D St**		**$51,000.00**
35	**N**	**$6,150.00**
36	**NE**	**$6,150.00**
41	**NW**	**$6,150.00**
39	**S**	**$6,150.00**
37	**SE**	**$6,150.00**
38	**SW**	**$6,150.00**
42	**W**	**$6,150.00**
Total Cost for Street: Almond Ave		**$40,500.00**
Intersection:	Orientation:	
Almond Ave and **Gateway Dr**		**$40,500.00**
153	**ENE**	**$6,150.00**
151	**ESE**	**$6,150.00**
154	**NNE**	**$7,950.00**
155	**NW**	**$7,950.00**
150	**SSE**	**$6,150.00**
152	**SW**	**$6,150.00**
Total Cost for Street: Clinton St		**$56,400.00**
Intersection:	Orientation:	
Clinton St and **Tozer St**		**$56,400.00**
166	**ENE**	**$7,950.00**
167	**ESE**	**$7,950.00**
165	**NNE**	**$6,150.00**
164	**NNW**	**$6,150.00**
168	**SSE**	**$7,950.00**
169	**SSW**	**$6,150.00**
163	**WNW**	**$6,150.00**
170	**WSW**	**$7,950.00**
Total Cost for Street: Country Club Dr		**$56,400.00**
Intersection:	Orientation:	
Country Club Dr and **W Sherwood Way**		**$56,400.00**
204	**ENE**	**$6,150.00**
205	**ESE**	**$7,950.00**
203	**NNE**	**$7,950.00**
202	**NNW**	**$6,150.00**
206	**SSE**	**$6,150.00**
199	**SSW**	**$7,950.00**
201	**WNW**	**$7,950.00**
200	**WSW**	**$6,150.00**
Total Cost for Street: E Cleveland Ave		**$229,200.00**
Intersection:	Orientation:	
E Cleveland Ave and **N D St**		**$58,200.00**

74	**ENE**	**$6,150.00**
75	**ESE**	**$7,950.00**
73	**NNE**	**$6,150.00**
72	**NNW**	**$7,950.00**
76	**SSE**	**$7,950.00**
77	**SSW**	**$6,150.00**
71	**WNW**	**$7,950.00**
78	**WSW**	**$7,950.00**

E Cleveland Ave and **N Lake St** **$60,000.00**

240	**ENE**	**$6,150.00**
238	**ESE**	**$7,950.00**
239	**NNE**	**$7,950.00**
241	**NNW**	**$7,950.00**
237	**SSE**	**$6,150.00**
236	**SSW**	**$7,950.00**
242	**WNW**	**$7,950.00**
235	**WSW**	**$7,950.00**

E Cleveland Ave and **Owens St** **$54,600.00**

70	**ENE**	**$6,150.00**
63	**ESE**	**$7,950.00**
69	**NNE**	**$7,950.00**
68	**NNW**	**$6,150.00**
64	**SSE**	**$6,150.00**
65	**SSW**	**$7,950.00**
67	**WNW**	**$6,150.00**
66	**WSW**	**$6,150.00**

E Cleveland Ave and **Tulare St** **$56,400.00**

246	**ENE**	**$7,950.00**
244	**ESE**	**$7,950.00**
245	**NNE**	**$7,950.00**
248	**NNW**	**$7,950.00**
243	**SSE**	**$6,150.00**
249	**SSW**	**$6,150.00**
247	**WNW**	**$6,150.00**
250	**WSW**	**$6,150.00**

Total Cost for Street: Golden State Dr **$4,950.00**

Intersection: Orientation:

Golden State Dr and **Almond Ave** **$4,950.00**

271	**NW**	**$450.00**
270	**SE**	**$2,250.00**
269	**SW**	**$2,250.00**

Total Cost for Street: Howard Rd **$205,350.00**

Intersection: Orientation:

Howard Rd and **Fairview Ave** **$44,100.00**

116	**ENE**	**$6,150.00**
117	**ESE**	**$6,150.00**

115	**NNE**	**$7,950.00**
114	**NW**	**$7,950.00**
118	**SSE**	**$7,950.00**
119	**SW**	**$7,950.00**

Howard Rd and **Granada Dr** **$52,800.00**

83	**ENE**	**$6,150.00**
88	**ESE**	**$6,150.00**
82	**NNE**	**$6,150.00**
84	**NNW**	**$6,150.00**
89	**SSE**	**$6,150.00**
87	**SSW**	**$7,950.00**
85	**WNW**	**$6,150.00**
86	**WSW**	**$7,950.00**

Howard Rd and **Pine St** **$45,900.00**

122	**ENE**	**$6,150.00**
123	**ESE**	**$7,950.00**
121	**NNE**	**$7,950.00**
120	**NW**	**$7,950.00**
124	**SSE**	**$7,950.00**
125	**SW**	**$7,950.00**

Howard Rd and **Schnoor Ave** **$54,600.00**

106	**ENE**	**$6,150.00**
113	**ESE**	**$6,150.00**
107	**NNE**	**$2,550.00**
108	**NNW**	**$7,950.00**
112	**SSE**	**$7,950.00**
111	**SSW**	**$7,950.00**
109	**WNW**	**$7,950.00**
110	**WSW**	**$7,950.00**

Howard Rd and **Shannon Ave** **$7,950.00**

81	**S**	**$7,950.00**

Total Cost for Street: N G St **$49,200.00**

Intersection: Orientation:

N G St and **W 4Th St** **$49,200.00**

54	**E**	**$6,150.00**
51	**N**	**$6,150.00**
52	**NE**	**$6,150.00**
55	**S**	**$6,150.00**
53	**SE**	**$6,150.00**
57	**SW**	**$6,150.00**
58	**W**	**$6,150.00**

Total Cost for Street: N Schnoor Ave **$107,400.00**

Intersection: Orientation:

N Schnoor Ave and **Foxglove Way** **$52,800.00**

95	**ENE**	**$7,950.00**
96	**ESE**	**$6,150.00**

94	**NNE**	**$6,150.00**
93	**NNW**	**$7,950.00**
97	**SSE**	**$6,150.00**
91	**SSW**	**$6,150.00**
92	**WNW**	**$6,150.00**
90	**WSW**	**$6,150.00**

N Schnoor Ave and **Kennedy St** **$54,600.00**

216	**ENE**	**$7,950.00**
217	**ESE**	**$7,950.00**
215	**NNE**	**$7,950.00**
221	**NNW**	**$6,150.00**
218	**SSE**	**$6,150.00**
219	**SSW**	**$6,150.00**
222	**WNW**	**$6,150.00**
220	**WSW**	**$6,150.00**

Total Cost for Street: Olive Ave $84,600.00

Intersection: Orientation:

Olive Ave and **$15,900.00**

4	**NE**	**$7,950.00**
3	**NW**	**$7,950.00**

Olive Ave and **Martin St** **$14,100.00**

12	**N**	**$6,150.00**
11	**SE**	**$7,950.00**

Olive Ave and **S K St** **$14,100.00**

13	**NW**	**$7,950.00**
14	**SW**	**$6,150.00**

Olive Ave and **S L St** **$28,200.00**

20	**NE**	**$6,150.00**
19	**SE**	**$7,950.00**
18	**SSW**	**$6,150.00**
17	**WSW**	**$7,950.00**

Olive Ave and **Santa Cruz St** **$6,150.00**

15	**NW**	**$6,150.00**
16	**SW**	**$0.00**

Olive Ave and **Wallace Ave** **$6,150.00**

162	**NE**	**$6,150.00**

Total Cost for Street: S Gateway Dr $58,200.00

Intersection: Orientation:

S Gateway Dr and **E 9Th St** **$28,200.00**

268	**E**	**$7,950.00**
266	**NNE**	**$7,950.00**
265	**NNW**	**$6,150.00**
267	**W**	**$6,150.00**

S Gateway Dr and **Olive Ave** **$30,000.00**

158	**NE**	**$7,950.00**

159	**NNW**	**$6,150.00**
161	**SW**	**$7,950.00**
160	**WNW**	**$7,950.00**

Total Cost for Street: St. Michelle Dr **$12,780.00**

Intersection: Orientation:

St. Michelle Dr and **Stadium Rd** **$12,780.00**

2	**NE**	**$6,150.00**
1	**NW**	**$6,630.00**

Total Cost for Street: Stadium Rd **$102,300.00**

Intersection: Orientation:

Stadium Rd and **Olive Ave** **$44,100.00**

292	**ESE**	**$6,150.00**
291	**NE**	**$7,950.00**
290	**NW**	**$7,950.00**
293	**SSE**	**$6,150.00**
288	**SSW**	**$7,950.00**
289	**WSW**	**$7,950.00**

Stadium Rd and **Pecan Ave** **$58,200.00**

133	**ENE**	**$7,950.00**
126	**ESE**	**$6,150.00**
132	**NNE**	**$6,150.00**
131	**NNW**	**$6,150.00**
127	**SSE**	**$7,950.00**
128	**SSW**	**$7,950.00**
130	**WNW**	**$7,950.00**
129	**WSW**	**$7,950.00**

Total Cost for Street: Sunrise Ave **$21,870.00**

Intersection: Orientation:

Sunrise Ave and **Lilly St** **$7,950.00**

175	**NE**	**$7,950.00**

Sunrise Ave and **Tozer St** **$13,920.00**

172	**ESE**	**$3,030.00**
173	**NE**	**$4,830.00**
171	**SSE**	**$3,030.00**
174	**SW**	**$3,030.00**

Total Cost for Street: Sunset Ave **$12,300.00**

Intersection: Orientation:

Sunset Ave and **Liberty Ln** **$12,300.00**

79	**E**	**$6,150.00**
80	**SW**	**$6,150.00**

Total Cost for Street: Valencia Ave **$12,300.00**

Intersection: Orientation:

Valencia Ave and **Pecan Ave** **$12,300.00**

157	**NW**	**$6,150.00**
156	**SW**	**$6,150.00**

Total Cost for Street: W 4th St **$79,200.00**

Intersection: Orientation:

W 4th St and **N Gateway Dr** **$54,600.00**

45	**E**	**$6,150.00**
43	**N**	**$6,150.00**
44	**NW**	**$7,950.00**
47	**S**	**$6,150.00**
46	**SE**	**$6,150.00**
48	**SW**	**$6,150.00**
49	**W**	**$7,950.00**

W 4th St and **N H St** **$24,600.00**

59	**E**	**$6,150.00**
61	**N**	**$6,150.00**
60	**S**	**$6,150.00**
62	**W**	**$6,150.00**

Total Cost for Street: W 6th St **$58,200.00**

Intersection: Orientation:

W 6th St and **S Gateway Dr** **$58,200.00**

263	**NE**	**$6,150.00**
257	**NNE**	**$7,950.00**
258	**NNW**	**$7,950.00**
259	**NW**	**$7,950.00**
264	**SE**	**$7,950.00**
262	**SSE**	**$7,950.00**
261	**SSW**	**$6,150.00**
260	**SW**	**$6,150.00**

Total Cost for Street: W Clark St **$56,400.00**

Intersection: Orientation:

W Clark St and **Country Club Dr** **$56,400.00**

196	**ENE**	**$6,150.00**
197	**ESE**	**$7,950.00**
195	**NNE**	**$7,950.00**
193	**NNW**	**$6,150.00**
198	**SSE**	**$7,950.00**
192	**SSW**	**$7,950.00**
194	**WNW**	**$6,150.00**
191	**WSW**	**$6,150.00**

Total Cost for Street: W Cleveland Ave **$96,600.00**

Intersection: Orientation:

W Cleveland Ave and **N Gateway Dr** **$24,300.00**

209	**NE**	**$4,050.00**
210	**NNW**	**$4,050.00**

214	**SE**	**$4,050.00**
212	**SSW**	**$4,050.00**
211	**WNW**	**$4,050.00**
213	**WSW**	**$4,050.00**
W Cleveland Ave and **N Schnoor Ave**		**$58,200.00**
101	**ENE**	**$7,950.00**
102	**ESE**	**$6,150.00**
100	**NNE**	**$7,950.00**
98	**NNW**	**$6,150.00**
103	**SSE**	**$7,950.00**
104	**SSW**	**$7,950.00**
99	**WNW**	**$6,150.00**
105	**WSW**	**$7,950.00**
W Cleveland Ave and **Sharon Bvd**		**$14,100.00**
208	**N**	**$7,950.00**
207	**S**	**$6,150.00**
Total Cost for Street:	**W Yosemite Ave**	**$89,700.00**
Intersection:	Orientation:	
W Yosemite Ave and **N Q St**		**$36,900.00**
24	**ENE**	**$6,150.00**
23	**ESE**	**$6,150.00**
25	**NNE**	**$6,150.00**
26	**NW**	**$6,150.00**
22	**SSE**	**$6,150.00**
21	**SW**	**$6,150.00**
W Yosemite Ave and **S I St**		**$52,800.00**
29	**E**	**$6,150.00**
32	**N**	**$6,150.00**
31	**NE**	**$7,950.00**
33	**NW**	**$7,950.00**
27	**S**	**$6,150.00**
30	**SE**	**$6,150.00**
28	**SW**	**$6,150.00**
34	**W**	**$6,150.00**
	Total Cost for City Pedestrian Signals:	**$1,484,850.00**

SURVEY DATA

December 2023
SSA Project # 20029

SALLY SWANSON
ARCHITECTS, INC.

Survey Street	Cross Street
4TH ST	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

35 **N** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **80**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

36 **NE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **80**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.8
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
4TH ST	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

41 **NW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **80**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

39 **S** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **80**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
4TH ST	**N D ST**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

37 **SE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**

Unit Cost **$6150.00**
Priority **80**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

38 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**

Unit Cost **$6150.00**
Priority **80**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	1.2
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
4TH ST	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

40 **SW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **82**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.8**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.8%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

42 **W** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **80**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: 4th St and N D St **$51,000.00**

Survey Street	Cross Street
4TH ST	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	**4th St**	**$51,000.00**

Survey Street **Cross Street**

ALMOND AVE — GATEWAY DR

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

153 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **60**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

151 **ESE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **65**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
ALMOND AVE	**GATEWAY DR**

154 NNE — Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info	
ADAAG:	**4.3.7**
ADA 2010:	**302.1**
CBC 2019:	**11B-302.1**
PROWAG:	**R404.2**
Unit Cost	**$7950.00**
Priority	**72**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

155 NW — Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info	
ADAAG:	**4.3.7**
ADA 2010:	**302.1**
CBC 2019:	**11B-302.1**
PROWAG:	**R404.2**
Unit Cost	**$7950.00**
Priority	**63**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Survey Street	Cross Street
ALMOND AVE	**GATEWAY DR**

ID *150* **Orientation** **SSE**

Existing Access Barrier and Proposed Solution

Push Button Reach Range

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **65**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

ID *152* **Orientation** **SW**

Existing Access Barrier and Proposed Solution

Push Button Reach Range

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **66**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	1.9
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Almond Ave** ***and*** **Gateway Dr** **$40,500.00**

Survey Street	Cross Street
ALMOND AVE	GATEWAY DR

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	Almond Ave	$40,500.00

Survey Street **Cross Street**

CLINTON ST — TOZER ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

166 **ENE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **78**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	**2.4**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

167 **ESE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **68**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.6**
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
CLINTON ST	**TOZER ST**

165 NNE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **76**

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.8
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

164 NNW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **86**

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
CLINTON ST	**TOZER ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

168 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **68**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.7%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	**3.7**
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

169 **SSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **75**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
CLINTON ST	**TOZER ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

163 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **80**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	1.7
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

170 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **78**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.2**
Clear Floor X Slope	(%)	**2.3**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **Clinton St** ***and*** **Tozer St** **$56,400.00**

Survey Street	Cross Street
CLINTON ST	TOZER ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	Clinton St	$56,400.00

Survey Street	Cross Street
COUNTRY CLUB DR	**W SHERWOOD WAY**

204 ENE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **91**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

205 ESE Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **83**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.6**
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
COUNTRY CLUB DR	**W SHERWOOD WAY**

203 NNE Clear Floor Space

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **81**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.3**
Clear Floor X Slope	(%)	**2.6**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

202 NNW Push Button Reach Range

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **88**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Survey Street	Cross Street
COUNTRY CLUB DR	**W SHERWOOD WAY**

206 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **78**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.8
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

199 SSW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **83**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.5%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.5**
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	43.0
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
COUNTRY CLUB DR	**W SHERWOOD WAY**

201 WNW Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **90**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

200 WSW Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **81**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	1.7
Button Ht.	(in)	43.0
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Survey Street	Cross Street
COUNTRY CLUB DR	W SHERWOOD WAY

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at:	Country Club Dr *and* W Sherwood Way	$56,400.00
Total Cost for Street:	Country Club Dr	$56,400.00

Survey Street	Cross Street
E CLEVELAND AVE	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

74 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **72**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	2.0
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

75 **ESE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.8%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **80**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.8**
Clear Floor X Slope	(%)	**3.6**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **E CLEVELAND AVE** **Cross Street** **N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

73 **NNE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **72**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

72 **NNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **74**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
E CLEVELAND AVE	**N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

76 SSE Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **72**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

77 SSW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **76**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **E CLEVELAND AVE** **Cross Street** **N D ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

71 **WNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **76**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.6**
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

78 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **78**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **E Cleveland Ave** ***and*** **N D St** **$58,200.00**

Survey Street	Cross Street
E CLEVELAND AVE	**N LAKE ST**

240 ENE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **80**

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

238 ESE Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	**2.4**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
E CLEVELAND AVE	**N LAKE ST**

239 NNE — Clear Floor Space

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**82**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.8
Clear Floor X Slope	(%)	**3.1**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

241 NNW — Clear Floor Space

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.5%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**84**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.5**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
E CLEVELAND AVE	**N LAKE ST**

237 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **70**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

236 SSW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **83**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	**2.3**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **E CLEVELAND AVE** **Cross Street** **N LAKE ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

242 **WNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **78**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

235 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **82**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	**3.1**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **E Cleveland Ave** ***and*** **N Lake St** **$60,000.00**

Survey Street	Cross Street
E CLEVELAND AVE	**OWENS ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

70 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **74**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	1.2
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

63 **ESE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.8%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **82**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.6**
Clear Floor X Slope	(%)	**2.8**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **E CLEVELAND AVE** **Cross Street** **OWENS ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

69 **NNE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$7950.00**
Priority **76**

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	**2.1**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

68 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **74**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	2.0
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
E CLEVELAND AVE	**OWENS ST**

64 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **83**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	8.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

65 SSW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$7950.00**
Priority **80**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.1**
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **E CLEVELAND AVE** **Cross Street** **OWENS ST**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

67 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **68**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	1.8
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

66 **WSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **72**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **E Cleveland Ave** ***and*** **Owens St** **$54,600.00**

Survey Street **E CLEVELAND AVE** **Cross Street** **TULARE ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

246 **ENE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **78**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	**3.1**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

244 **ESE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **78**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**2.4**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
E CLEVELAND AVE	**TULARE ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

245 **NNE** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**72**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.2**
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

248 **NNW** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**72**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.6**
Clear Floor X Slope	(%)	1.7
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
E CLEVELAND AVE	**TULARE ST**

243 SSE Color Coding

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements		
243	SSE	Color Coding		Accessible Path	(y/n)	Yes
				Clear Floor Space	(y/n)	Yes
				Clear Floor Slope	(%)	1.7
			CBC 2019: **11B-703.7.2.7**	Clear Floor X Slope	(%)	2.0
				Button Ht.	(in)	46.0
				Button Reach	(in)	0.0
			Unit Cost **$6150.00**	Button Diameter	(in)	2.0
			Priority **73**	Button Pressure	(lbs)	0.0
				Closed Fist Operation	(y/n)	Yes
				Visual Contrast	(y/n)	Yes
				Contrasting Color Bands	(y/n)	**No**
				Vibrotactile Feedback	(y/n)	**No**
				Audible Walk Indicator	(y/n)	**No**
				Button Locator Tone	(y/n)	**No**
				Tactile Arrow	(y/n)	**No**
				Within 5 ft from crosswalk	(y/n)	Yes
				1.5 - 6.0 ft from curb	(y/n)	Yes
				10 ft minimum separation		>10ft

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

249 SSW Push Button Reach Range

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements		
249	SSW	Push Button Reach Range		Accessible Path	(y/n)	Yes
				Clear Floor Space	(y/n)	Yes
				Clear Floor Slope	(%)	0.6
			ADAAG: **4.2.5**	Clear Floor X Slope	(%)	0.3
			ADA 2010: **308.2.1**	Button Ht.	(in)	**39.0**
			CBC 2019: **11B-308.2.1**	Button Reach	(in)	0.0
			PROWAG: **R406.2**	Button Diameter	(in)	2.0
				Button Pressure	(lbs)	2.0
			Unit Cost **$6150.00**	Closed Fist Operation	(y/n)	Yes
			Priority **70**	Visual Contrast	(y/n)	Yes
				Contrasting Color Bands	(y/n)	**No**
				Vibrotactile Feedback	(y/n)	**No**
				Audible Walk Indicator	(y/n)	**No**
				Button Locator Tone	(y/n)	**No**
				Tactile Arrow	(y/n)	**No**
				Within 5 ft from crosswalk	(y/n)	Yes
				1.5 - 6.0 ft from curb	(y/n)	Yes
				10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
E CLEVELAND AVE	**TULARE ST**

247 WNW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **70**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.4
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

250 WSW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **76**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.4
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **E Cleveland Ave** ***and*** **Tulare St** **$56,400.00**

Survey Street	Cross Street
E CLEVELAND AVE	TULARE ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	E Cleveland Ave	$229,200.00

Survey Street **GOLDEN STATE DR** **Cross Street** **ALMOND AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

271 **NW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$450.00**
Priority **48**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.7
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

270 **SE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$2250.00**
Priority **55**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.2**
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
GOLDEN STATE DR	**ALMOND AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

269 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$2250.00**
Priority **54**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**2.1**
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **Golden State Dr** ***and*** **Almond Ave** **$4,950.00**

Total Cost for Street: **Golden State Dr** **$4,950.00**

Survey Street **HOWARD RD** **Cross Street** **FAIRVIEW AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

116 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **35.5"**

Unit Cost **$6150.00**
Priority **66**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**35.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

117 **ESE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **36.5"**

Unit Cost **$6150.00**
Priority **78**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**36.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
HOWARD RD	**FAIRVIEW AVE**

ID *115* **Orientation** **NNE**

Existing Access Barrier and Proposed Solution

Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.8%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Codes / Mitigation Info

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**62**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	**2.8**
Button Ht.	(in)	**36.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

---

114 **NW**

Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.8%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Codes / Mitigation Info

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**63**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	**2.8**
Button Ht.	(in)	**36.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street **HOWARD RD** **Cross Street** **FAIRVIEW AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

118 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **74**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **5.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**5.9**
Clear Floor X Slope	(%)	**4.5**
Button Ht.	(in)	**36.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

119 **SW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **71**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	**3.0**
Button Ht.	(in)	**36.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Survey Street	Cross Street
HOWARD RD	**FAIRVIEW AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: Howard Rd *and* Fairview Ave — $44,100.00

83 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost: **$6150.00**
Priority: **60**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

88 **ESE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost: **$6150.00**
Priority: **61**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**40.0**
Button Reach	(in)	3.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
HOWARD RD	**GRANADA DR**

ID 82 **Orientation** NNE

Existing Access Barrier and Proposed Solution

Push Button Reach Range

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **60**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

ID 84 **Orientation** NNW

Existing Access Barrier and Proposed Solution

Push Button Reach Range

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Codes / Mitigation Info

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **61**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**GRANADA DR**

89 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **62**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**40.0**
Button Reach	(in)	2.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

87 SSW Clear Floor Space

ADAAG: **4.2.4.1**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.3**

Unit Cost **$7950.00**
Priority **70**

- *As-Built Description:*

  Clear floor or ground space at the pedestrian signal device is less than the required 30" x 48" minimum.

- *Proposed Solution:*

  Provide the required 30" x 48" minimum clear floor or ground space at the pedestrian signal device.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	**No**
Clear Floor Slope	(%)	N/A
Clear Floor X Slope	(%)	N/A
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**GRANADA DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

85 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**

Unit Cost **$6150.00**
Priority **61**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

86 **WSW** Clear Floor Space

ADAAG: **4.2.4.1**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.3**

- *As-Built Description:*

  Clear floor or ground space at the pedestrian signal device is less than the required 30" x 48" minimum.

- *Proposed Solution:*

  Provide the required 30" x 48" minimum clear floor or ground space at the pedestrian signal device.

Unit Cost **$7950.00**
Priority **74**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Remove the obstruction or reposition the pedestrian signal device to not exceed the 10" maximum side reach depth and 48" high in reach height. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	**No**
Clear Floor Slope	(%)	N/A
Clear Floor X Slope	(%)	N/A
Button Ht.	(in)	**40.0**
Button Reach	(in)	**24.0**
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **Howard Rd** ***and*** **Granada Dr** **$52,800.00**

Survey Street	Cross Street
HOWARD RD	**PINE ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

122 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**

Unit Cost **$6150.00**
Priority **78**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

123 **ESE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.8%**

Unit Cost **$7950.00**
Priority **84**

- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	**3.8**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**PINE ST**

121 NNE Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost: **$7950.00**
Priority: **85**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**48.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

120 NW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost: **$7950.00**
Priority: **86**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **7.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**7.0**
Button Ht.	(in)	46.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		N/A

Survey Street	Cross Street
HOWARD RD	**PINE ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

124 **SSE** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**82**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.3**
Clear Floor X Slope	(%)	1.9
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

125 **SW** Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **9.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**98**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	**9.0**
Button Ht.	(in)	44.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Howard Rd** ***and*** **Pine St** **$45,900.00**

Survey Street	Cross Street
HOWARD RD	**SCHNOOR AVE**

106 ENE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **70**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

113 ESE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **71**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	**40.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**SCHNOOR AVE**

107 NNE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$2550.00**
Priority **59**

- *As-Built Description:*

  Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

108 NNW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **72**

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.7%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	**2.7**
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**SCHNOOR AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

112 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **67**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	**2.3**
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

111 **SSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **72**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
HOWARD RD	**SCHNOOR AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

109 **WNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **73**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	**3.7**
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.7%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

110 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **72**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.1**
Clear Floor X Slope	(%)	1.8
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
HOWARD RD	SCHNOOR AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: Howard Rd *and* Schnoor Ave — $54,600.00

81 **S** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost: **$7950.00**
Priority: **79**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.6**
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**40.0**
Button Reach	(in)	15.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: Howard Rd *and* Shannon Ave — $7,950.00

Total Cost for Street: Howard Rd — **$205,350.00**

Survey Street	Cross Street
N G ST	**W 4TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

54 **E** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **85**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

51 **N** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **74**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
N G ST	**W 4TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

52 **NE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **84**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

55 **S** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **97**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.7
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
N G ST	**W 4TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

53 **SE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **85**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

56 **SE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Unit Cost **$6150.00**
Priority **97**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
N G ST	**W 4TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

57 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **86**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

58 **W** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **86**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **N G St** ***and*** **W 4Th St** **$49,200.00**

Survey Street	Cross Street
N G ST	**W 4TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street: **N G St** **$49,200.00**

Survey Street **N SCHNOOR AVE** **Cross Street** **FOXGLOVE WAY**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

95 **ENE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **52**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

96 **ESE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **44**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
N SCHNOOR AVE	**FOXGLOVE WAY**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

94 **NNE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **50**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

93 **NNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **66**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.1**
Clear Floor X Slope	(%)	**2.8**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **Cross Street**

N SCHNOOR AVE — FOXGLOVE WAY

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

97 **SSE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**

Unit Cost **$6150.00**
Priority **62**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	0.9
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

91 **SSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**

Unit Cost **$6150.00**
Priority **62**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.7
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **N SCHNOOR AVE** **Cross Street** **FOXGLOVE WAY**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

92 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **62**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

90 **WSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **62**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **N Schnoor Ave** ***and*** **Foxglove Way** **$52,800.00**

Survey Street	Cross Street
N SCHNOOR AVE	**KENNEDY ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

216 **ENE** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **46**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**41.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

217 **ESE** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **48**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.1**
Clear Floor X Slope	(%)	**2.1**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
N SCHNOOR AVE	**KENNEDY ST**

215 NNE Clear Floor Space

ID 215 **Orientation** NNE **Existing Access Barrier and Proposed Solution** Clear Floor Space

Codes / Mitigation Info

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **46**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.4**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

221 NNW Push Button Reach Range

ID 221 **Orientation** NNW **Existing Access Barrier and Proposed Solution** Push Button Reach Range

Codes / Mitigation Info

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **44**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.2
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
N SCHNOOR AVE	**KENNEDY ST**

218 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **44**

- *As-Built Description:*

  Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.4
Clear Floor X Slope	(%)	1.8
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

219 SSW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **44**

- *As-Built Description:*

  Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.0
Clear Floor X Slope	(%)	1.0
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **N SCHNOOR AVE** **Cross Street** **KENNEDY ST**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

222 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **44**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	2.0
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

220 **WSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **44**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **N Schnoor Ave** ***and*** **Kennedy St** **$54,600.00**

Survey Street	Cross Street
N SCHNOOR AVE	KENNEDY ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	N Schnoor Ave	$107,400.00

Survey Street **Cross Street**

OLIVE AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

4 **NE** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$7950.00**
Priority **93**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.1**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

3 **NW** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **93**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.2**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Olive Ave** ***and*** **$15,900.00**

Survey Street **Cross Street**

OLIVE AVE — MARTIN ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

12 **N** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **91**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

11 **SE** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.4%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **94**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.4**
Clear Floor X Slope	(%)	1.0
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: Olive Ave and Martin St **$14,100.00**

Survey Street	Cross Street
OLIVE AVE	**S K ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

13 **NW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **94**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**5.3**
Clear Floor X Slope	(%)	2.0
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **5.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

14 **SW** Color Coding

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **91**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **Olive Ave** ***and*** **S K St** **$14,100.00**

Survey Street **OLIVE AVE** **Cross Street** **S L ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

20 **NE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **41.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **78**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**41.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

19 **SE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **7.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **89**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**7.1**
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **OLIVE AVE** **Cross Street** **S L ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

18 **SSW** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **81**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	1.2
Button Ht.	(in)	48.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

17 **WSW** Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **89**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	**3.2**
Button Ht.	(in)	48.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **Olive Ave** ***and*** **S L St** **$28,200.00**

Survey Street	Cross Street
OLIVE AVE	**SANTA CRUZ ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

15 **NW** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **79**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

16 **SW** Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$0.00**
Priority **86**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	N/A
Clear Floor X Slope	(%)	N/A
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Olive Ave** ***and*** **Santa Cruz St** **$6,150.00**

Survey Street	Cross Street
OLIVE AVE	**WALLACE AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
162	**NE**	Color Coding		

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **57**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Olive Ave** ***and*** **Wallace Ave** **$6,150.00**

Total Cost for Street: **Olive Ave** **$84,600.00**

Survey Street **S GATEWAY DR** **Cross Street** **E 9TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

268 **E** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **106**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.2**
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	47.0
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

266 **NNE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **106**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**6.3**
Clear Floor X Slope	(%)	**6.2**
Button Ht.	(in)	**41.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **6.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Survey Street	Cross Street
S GATEWAY DR	**E 9TH ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

265 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **51.0"**

Unit Cost **$6150.00**
Priority **89**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**51.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

267 **W** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **51.0"**

Unit Cost **$6150.00**
Priority **94**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Remove the obstruction or reposition the pedestrian signal device to not exceed the 10" maximum side reach depth and 48" high in reach height. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**51.0**
Button Reach	(in)	18.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **S Gateway Dr** ***and*** **E 9Th St** **$28,200.00**

Survey Street	Cross Street
S GATEWAY DR	**OLIVE AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

158 **NE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	**2.6**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

159 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **54**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	1.7
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **S GATEWAY DR** **Cross Street** **OLIVE AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

161 **SW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **57**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.7**
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.7%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

160 **WNW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **60**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.7**
Clear Floor X Slope	(%)	**4.6**
Button Ht.	(in)	**38.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.7%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

***Total Costs for Pedestrian Signals at:* S Gateway Dr *and* Olive Ave** **$30,000.00**

Survey Street	Cross Street
S GATEWAY DR	OLIVE AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	S Gateway Dr	$58,200.00

Survey Street **ST. MICHELLE DR** **Cross Street** **STADIUM RD**

ID 2 **Orientation** NE **Existing Access Barrier and Proposed Solution** Push Button Reach Range

Codes / Mitigation Info
ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **66**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**36.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **36.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ID 1 **Orientation** NW **Existing Access Barrier and Proposed Solution** Push Button Reach Range

Codes / Mitigation Info
ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6630.00**
Priority **66**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**36.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **36.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **St. Michelle Dr** ***and*** **Stadium Rd** **$12,780.00**

Survey Street	Cross Street
ST. MICHELLE DR	**STADIUM RD**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street: **St. Michelle Dr** **$12,780.00**

Survey Street	Cross Street
STADIUM RD	**OLIVE AVE**

292 ESE — Push Button Reach Range

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost	**$6150.00**
Priority	**87**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	1.0
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

291 NE — Clear Floor Space

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost	**$7950.00**
Priority	**93**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.0**
Clear Floor X Slope	(%)	**2.5**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **STADIUM RD** **Cross Street** **OLIVE AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

290 **NW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **98**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	**7.1**
Button Ht.	(in)	45.5
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **7.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

293 **SSE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **87**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	1.0
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street **Cross Street**

STADIUM RD — OLIVE AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

288 **SSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **91**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.2**
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	46.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

289 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **91**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	46.5
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **Stadium Rd** ***and*** **Olive Ave** **$44,100.00**

Survey Street **Cross Street**

STADIUM RD — PECAN AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

133 ENE — Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **82**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **5.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**5.9**
Button Ht.	(in)	**39.5**
Button Reach	(in)	13.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		**<10ft**

126 ESE — Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **71**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
STADIUM RD	**PECAN AVE**

132 NNE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **74**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		**<10ft**

131 NNW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **70**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	1.7
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **Cross Street**

STADIUM RD — PECAN AVE

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

127 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **74**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.4
Clear Floor X Slope	(%)	**3.3**
Button Ht.	(in)	**36.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		>10ft

128 **SSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **74**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.9**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	5.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		>10ft

Survey Street	Cross Street
STADIUM RD	**PECAN AVE**

130 WNW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	**2.1**
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

129 WSW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.0%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.0**
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**37.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
STADIUM RD	**PECAN AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: Stadium Rd and Pecan Ave	**$58,200.00**
Total Cost for Street: Stadium Rd	**$102,300.00**

Survey Street **SUNRISE AVE** **Cross Street** **LILLY ST**

ID 175 **Orientation** NE **Existing Access Barrier and Proposed Solution** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **114**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **7.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	**7.2**
Button Ht.	(in)	44.0
Button Reach	(in)	12.5
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

***Total Costs for Pedestrian Signals at:* Sunrise Ave *and* Lilly St** **$7,950.00**

ID 172 **Orientation** ESE **Existing Access Barrier and Proposed Solution** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$3030.00**
Priority **54**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device.

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **SUNRISE AVE** **Cross Street** **TOZER ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

173 **NE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$4830.00**
Priority **59**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **4.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**4.6**
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

171 **SSE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$3030.00**
Priority **54**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
SUNRISE AVE	**TOZER ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

174 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$3030.00**
Priority **54**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	Yes
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device.

Total Costs for Pedestrian Signals at: **Sunrise Ave** ***and*** **Tozer St** **$13,920.00**

Total Cost for Street: **Sunrise Ave** **$21,870.00**

Survey Street **SUNSET AVE** **Cross Street** **LIBERTY LN**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements		
79	**E**	Color Coding		Accessible Path	(y/n)	Yes
				Clear Floor Space	(y/n)	Yes
				Clear Floor Slope	(%)	0.2
			CBC 2019: **11B-703.7.2.7**	Clear Floor X Slope	(%)	1.9
				Button Ht.	(in)	42.0
				Button Reach	(in)	0.0
			Unit Cost **$6150.00**	Button Diameter	(in)	2.0
			Priority **52**	Button Pressure	(lbs)	0.0
				Closed Fist Operation	(y/n)	Yes
				Visual Contrast	(y/n)	Yes
				Contrasting Color Bands	(y/n)	**No**
				Vibrotactile Feedback	(y/n)	**No**
				Audible Walk Indicator	(y/n)	**No**
				Button Locator Tone	(y/n)	**No**
				Tactile Arrow	(y/n)	**No**
				Within 5 ft from crosswalk	(y/n)	Yes
				1.5 - 6.0 ft from curb	(y/n)	Yes
				10 ft minimum separation		N/A

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements		
80	**SW**	Color Coding		Accessible Path	(y/n)	Yes
				Clear Floor Space	(y/n)	Yes
				Clear Floor Slope	(%)	1.3
			CBC 2019: **11B-703.7.2.7**	Clear Floor X Slope	(%)	1.0
				Button Ht.	(in)	42.0
				Button Reach	(in)	0.0
			Unit Cost **$6150.00**	Button Diameter	(in)	2.0
			Priority **56**	Button Pressure	(lbs)	1.0
				Closed Fist Operation	(y/n)	Yes
				Visual Contrast	(y/n)	Yes
				Contrasting Color Bands	(y/n)	**No**
				Vibrotactile Feedback	(y/n)	**No**
				Audible Walk Indicator	(y/n)	**No**
				Button Locator Tone	(y/n)	**No**
				Tactile Arrow	(y/n)	**No**
				Within 5 ft from crosswalk	(y/n)	Yes
				1.5 - 6.0 ft from curb	(y/n)	Yes
				10 ft minimum separation		N/A

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **Sunset Ave** ***and*** **Liberty Ln** **$12,300.00**

Total Cost for Street: **Sunset Ave** **$12,300.00**

Survey Street **Cross Street**

VALENCIA AVE — PECAN AVE

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

157 **NW** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **64**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	42.5
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

156 **SW** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **61**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.8
Button Ht.	(in)	42.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **Valencia Ave** ***and*** **Pecan Ave** **$12,300.00**

Total Cost for Street: **Valencia Ave** **$12,300.00**

Survey Street	Cross Street
W 4TH ST	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

45 **E** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**

Unit Cost **$6150.00**
Priority **84**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

43 **N** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**

Unit Cost **$6150.00**
Priority **92**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide push button which contrasts with surrounding housing. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	**No**
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W 4TH ST	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

44 **NW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **89**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.2**
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		**<10ft**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

47 **S** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **84**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.6
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
W 4TH ST	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

46 **SE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **85**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	1.0
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

48 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **84**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W 4TH ST	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

50 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$7950.00**
Priority **87**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**2.1**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

49 **W** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.3%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **87**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.3**
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
W 4TH ST	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: W 4th St *and* N Gateway Dr — $54,600.00

59 **E** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **87**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

61 **N** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **87**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Survey Street	Cross Street
W 4TH ST	**N H ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

60 **S** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **78**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.0
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		>10ft

62 **W** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **77**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.1
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

***Total Costs for Pedestrian Signals at:* W 4th St *and* N H St** **$24,600.00**

Survey Street	Cross Street
W 4TH ST	**N H ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	**W 4th St**	**$79,200.00**

Survey Street	Cross Street
W 6TH ST	**S GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

263 **NE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.0"**

Unit Cost **$6150.00**
Priority **84**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.5
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

257 **NNE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.7%**

Unit Cost **$7950.00**
Priority **86**

- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	**3.7**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W 6TH ST	**S GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

258 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$7950.00**
Priority **87**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

259 **NW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **86**

- *As-Built Description:*

  The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W 6TH ST	**S GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

264 **SE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **86**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.2**
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

262 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **86**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.0**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **W 6TH ST** **Cross Street** **S GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

261 **SSW** Color Coding

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **77**

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	48.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

260 **SW** Push Button Reach Range

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **74**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **W 6th St** ***and*** **S Gateway Dr** **$58,200.00**

Survey Street	Cross Street
W 6TH ST	**S GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	**W 6th St**	**$58,200.00**

Survey Street	Cross Street
W CLARK ST	**COUNTRY CLUB DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

196 **ENE** Push Button Reach Range

- *As-Built Description:*

Where a forward/side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **66**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

197 **ESE** Clear Floor Space

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.3%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **68**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.6
Clear Floor X Slope	(%)	**2.3**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **Cross Street**

W CLARK ST — COUNTRY CLUB DR

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

195 **NNE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **70**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	**3.2**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		>10ft

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

193 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **62**

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.2
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Survey Street	Cross Street
W CLARK ST	**COUNTRY CLUB DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

198 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **68**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.0%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.0**
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

192 **SSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **64**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.1%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**3.1**
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **W CLARK ST** **Cross Street** **COUNTRY CLUB DR**

ID 194 **Orientation** WNW **Existing Access Barrier and Proposed Solution** Push Button Reach Range

Codes / Mitigation Info
ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **62**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**38.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

ID 191 **Orientation** WSW **Existing Access Barrier and Proposed Solution** Push Button Reach Range

Codes / Mitigation Info
ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **62**

Measurements

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**38.2**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **38.2"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Total Costs for Pedestrian Signals at: **W Clark St** ***and*** **Country Club Dr** **$56,400.00**

Survey Street	Cross Street
W CLARK ST	COUNTRY CLUB DR

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Cost for Street:	W Clark St	$56,400.00

Survey Street **W CLEVELAND AVE**

Cross Street **N GATEWAY DR**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

209 **NE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **63**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

210 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **73**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	2.0
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.1
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street **Cross Street**

W CLEVELAND AVE — N GATEWAY DR

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

214 **SE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **41.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **81**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.7
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**41.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

212 **SSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **41.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **76**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**41.0**
Button Reach	(in)	16.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W CLEVELAND AVE	**N GATEWAY DR**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

211 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **73**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.7
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

213 **WSW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$4050.00**
Priority **86**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**40.0**
Button Reach	(in)	16.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	1.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	Yes
Audible Walk Indicator	(y/n)	Speech Message
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	Yes
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Total Costs for Pedestrian Signals at: **W Cleveland Ave** ***and*** **N Gateway Dr** **$24,300.00**

Survey Street **W CLEVELAND AVE** **Cross Street** **N SCHNOOR AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

101 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 30"x48" level 2% max. clear space at base of signal device. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.2**
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

102 **ESE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **79**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **36.5"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.9
Clear Floor X Slope	(%)	0.6
Button Ht.	(in)	**36.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street **W CLEVELAND AVE** **Cross Street** **N SCHNOOR AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

100 **NNE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **73**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	**2.9**
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

98 **NNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **71**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **39.5"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.2
Clear Floor X Slope	(%)	0.1
Button Ht.	(in)	**39.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street **W CLEVELAND AVE** **Cross Street** **N SCHNOOR AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

103 **SSE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **82**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.7%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.7**
Clear Floor X Slope	(%)	**2.7**
Button Ht.	(in)	**39.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

104 **SSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **82**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.6%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.3**
Clear Floor X Slope	(%)	**2.6**
Button Ht.	(in)	**40.5**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street **W CLEVELAND AVE** **Cross Street** **N SCHNOOR AVE**

ID **Orientation** **Existing Access Barrier and Proposed Solution** **Codes / Mitigation Info** **Measurements**

99 **WNW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **40.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **71**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.5
Clear Floor X Slope	(%)	0.3
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

105 **WSW** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

- *As-Built Description:*

  The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.5%**
- *Proposed Solution:*

  Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

Unit Cost **$7950.00**
Priority **82**

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**2.5**
Clear Floor X Slope	(%)	**2.4**
Button Ht.	(in)	**40.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	2.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W CLEVELAND AVE	**N SCHNOOR AVE**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: W Cleveland Ave and N Schnoor Ave $58,200.00

208 **N** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **305.1**
CBC 2019: **11B-305.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **101**

- *As-Built Description:*

The slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **6.9%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Remove the obstruction or reposition the pedestrian signal device to not exceed the 10" maximum side reach depth and 48" high in reach height. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	**6.9**
Clear Floor X Slope	(%)	1.9
Button Ht.	(in)	**52.0**
Button Reach	(in)	16.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

207 **S** Color Coding

CBC 2019: **11B-703.7.2.7**

Unit Cost **$6150.00**
Priority **97**

- *As-Built Description:*

Pole-supported pedestrian traffic-control buttons is not identified with color coding consisting of a textured horizontal yellow band 2 inches in width encircling the pole, and a 1-inch wide dark border band above and below this yellow band.

- *Proposed Solution:*

Provide 2 inch wide color coding with 1 inch wide dark borders located directly above control button.

- *Additional Items:*

Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	1.3
Button Ht.	(in)	48.0
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W CLEVELAND AVE	SHARON BVD

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

Total Costs for Pedestrian Signals at: W Cleveland Ave and Sharon Bvd	**$14,100.00**
Total Cost for Street: W Cleveland Ave	**$96,600.00**

Survey Street	Cross Street
W YOSEMITE AVE	**N Q ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

24 **ENE** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **111**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.7
Clear Floor X Slope	(%)	0.8
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	**No**
1.5 - 6.0 ft from curb	(y/n)	**No**
10 ft minimum separation		**<10ft**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 5' from the crosswalk line extended.Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Survey Street	Cross Street
W YOSEMITE AVE	**N Q ST**

23 ESE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **106**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	0.4
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

25 NNE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **101**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.8
Clear Floor X Slope	(%)	0.7
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W YOSEMITE AVE	**N Q ST**

26 NW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **94**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	2.0
Clear Floor X Slope	(%)	0.0
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

22 SSE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

Unit Cost **$6150.00**
Priority **106**

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.1
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		>10ft

Survey Street	Cross Street
W YOSEMITE AVE	**N Q ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

21 **SW** Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **107**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.0
Clear Floor X Slope	(%)	0.5
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		N/A

Total Costs for Pedestrian Signals at: **W Yosemite Ave** ***and*** **N Q St** **$36,900.00**

Survey Street	Cross Street
W YOSEMITE AVE	**S I ST**

29 E Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **105**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.9
Clear Floor X Slope	(%)	0.2
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

32 N Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **92**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.3
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W YOSEMITE AVE	**S I ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

31 **NE** Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **119**

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.3
Clear Floor X Slope	(%)	**2.2**
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **2.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Survey Street **Cross Street**

W YOSEMITE AVE — S I ST

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements

33 NW Clear Floor Space

ADAAG: **4.3.7**
ADA 2010: **302.1**
CBC 2019: **11B-302.1**
PROWAG: **R404.2**

Unit Cost **$7950.00**
Priority **94**

- *As-Built Description:*

The cross slope of the floor or ground surface at the pedestrian signal device exceed 1:48 (2%).

- *As-is Measurement:* **3.2%**
- *Proposed Solution:*

Modify or repave the ground surface as necessary to provide slope (s) not exceeding the required 1:48 (2%) maximum in any direction.

- *Additional Items:*

Remount push button to 42" min. and 48" max. height to center of button. Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide a button locator tone.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.8
Clear Floor X Slope	(%)	**3.2**
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	2.0
Button Pressure	(lbs)	0.0
Closed Fist Operation	(y/n)	Yes
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

27 S Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **105**

- *As-Built Description:*

Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	1.1
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W YOSEMITE AVE	**S I ST**

30 SE Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **105**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	0.4
Clear Floor X Slope	(%)	1.6
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

28 SW Push Button Reach Range

ADAAG: **4.2.5**
ADA 2010: **308.2.1**
CBC 2019: **11B-308.2.1**
PROWAG: **R406.2**

Unit Cost **$6150.00**
Priority **105**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**
- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Measurements		
Accessible Path	(y/n)	Yes
Clear Floor Space	(y/n)	Yes
Clear Floor Slope	(%)	1.4
Clear Floor X Slope	(%)	1.2
Button Ht.	(in)	**50.0**
Button Reach	(in)	0.0
Button Diameter	(in)	**0.5**
Button Pressure	(lbs)	5.0
Closed Fist Operation	(y/n)	**No**
Visual Contrast	(y/n)	Yes
Contrasting Color Bands	(y/n)	**No**
Vibrotactile Feedback	(y/n)	**No**
Audible Walk Indicator	(y/n)	**No**
Button Locator Tone	(y/n)	**No**
Tactile Arrow	(y/n)	**No**
Within 5 ft from crosswalk	(y/n)	Yes
1.5 - 6.0 ft from curb	(y/n)	Yes
10 ft minimum separation		**<10ft**

Survey Street	Cross Street
W YOSEMITE AVE	**S I ST**

ID	Orientation	Existing Access Barrier and Proposed Solution	Codes / Mitigation Info	Measurements
34	**W**	Push Button Reach Range	ADAAG: **4.2.5** ADA 2010: **308.2.1** CBC 2019: **11B-308.2.1** PROWAG: **R406.2**	Accessible Path (y/n) Yes Clear Floor Space (y/n) Yes Clear Floor Slope (%) 0.9 Clear Floor X Slope (%) 0.9 Button Ht. (in) **50.0** Button Reach (in) 0.0 Button Diameter (in) **0.5** Button Pressure (lbs) 5.0 Closed Fist Operation (y/n) **No** Visual Contrast (y/n) Yes Contrasting Color Bands (y/n) **No** Vibrotactile Feedback (y/n) **No** Audible Walk Indicator (y/n) **No** Button Locator Tone (y/n) **No** Tactile Arrow (y/n) **No** Within 5 ft from crosswalk (y/n) Yes 1.5 - 6.0 ft from curb (y/n) **No** 10 ft minimum separation **<10ft**

- *As-Built Description:*

  Where a forward/or side reach is unobstructed, the high forward/side reach is more than 48" or less than 42" above the ground.

- *As-is Measurement:* **50.0"**

Unit Cost **$6150.00**
Priority **108**

- *Proposed Solution:*

  Reposition the pedestrian signal device to be less than 48" and more than 42" from the ground.

- *Additional Items:*

Provide 2" wide color coding with 1" wide dark borders located directly above control button. Provide an tactile arrow aligned parallel to the crosswalk direction on the sign. Provide voice or tone audible indication of the WALK interval at the pedestrian signal device. Relocate the pedestrian signal device to be less than 10' from other pedestrian signal devices.Relocate the pedestrian signal device to be less than 1.5' - 6' from the curbline.Provide a vibrotactile signal device that is integrated with the pedestrian pushbutton. Provide 2" diameter push button. Provide a button locator tone. Provide new push button and housing to allow for closed fist operation.

Total Costs for Pedestrian Signals at: **W Yosemite Ave** ***and*** **S I St** **$52,800.00**

Total Cost for Street: **W Yosemite Ave** **$89,700.00**

Total Cost for City Pedestrian Signals: **$1,484,850.00**

APPENDIX F: PRIORITIZATION CRITERIA FOR BARRIER MITIGATION – PUBLIC RIGHTS-OF-WAY

City of Madera

Appendix F: Prioritization Criteria

Barrier Mitigation - Public Rights-of-Way

May 2024
SSA Project # 20029

NORTHERN CALIFORNIA
100 BUSH STREET, SUITE 1625, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.514.4771
WWW.SWAGROUP.NET

APPENDIX F: PRIORITIZATION CRITERIA FOR BARRIER MITIGATION – PUBLIC RIGHTS-OF-WAY

Table of Contents

i. Definitions

ii. Activity Score
a. Table 1: Activity Score Category Breakdown

iii. Barrier Score
a. Table 2: Barrier Score Breakdown for Sidewalks
b. Figure 1: Curb Ramp Measurements Diagram (Perpendicular)
c. Table 3: Barrier Score Breakdown for Curb Ramps (Perpendicular)
d. Figure 2: Curb Ramp Measurements Diagram (Parallel)
e. Table 4: Barrier Score Breakdown for Curb Ramps (Parallel)
f. Figure 3: Curb Ramp Measurements Diagram (Combination)
g. Table 5: Barrier Score Breakdown for Curb Ramps (Combination)
h. Figure 4: Pedestrian Signal Location Diagram
i. Figure 5: Pedestrian Signal Pole Diagram
j. Table 6: Barrier Score Breakdown for Pedestrian Signals

iv. Priority Score

Definitions

Access Compliance Survey – Process taken to fulfill the requirements of a Transition Plan, by surveying and identifying physical barriers which impede accessibility to a program or service provided to the public.

Activity Score – Rating that summarizes a feature's expected frequency of use and its impact on individuals with disabilities.

Barrier Score – Rating that summarizes the severity of a feature relative to its deviation from current State and Federal Standards.

Curb Ramp – A ramp graded down from the top surface of a sidewalk to the surface of an adjoining street to provide connectivity within the Public Rights-of-Way.

Facility – A place housing a program or service for the public.

Feature – An element provided in the Public Rights-of-Way, including public sidewalks and streets, crosswalks, curb ramps, street furnishings, pedestrian signals, parking, etc. The four main features surveyed are 1) sidewalks, including gaps, 2) curb ramps, 3) pedestrian signals, and 4) bus stops.

Pedestrian Signal – Devices used at signalized intersections to notify pedestrians when it is safe to cross the street.

Priority Score – Rating that is the summation of both Activity Score and Barrier Score. This rating is used as criteria for determining barrier mitigation schedules that are a requirement of a Transition Plan.

PROW – *Refer to definition of "Public Rights-of-Way (PROW)"*

Public Rights-of-Way (PROW) – Public infrastructure such as streets, roads, or walkways under the responsibility or authority of a public entity, such as a City or County.

Title I – Regulations from the Americans with Disabilities Act specific to employment.

Title II – Regulations from the Americans with Disabilities Act specific to State and local government entities, including City and County governments.

Title III – Regulations from the Americans with Disabilities Act specific to areas of public accommodations and commercial facilities.

Transition Plan - A living document that inventories the physical barriers identified which impede accessibility to a public entity's programs and services. The document will identify

solutions to mitigate the barriers and set forth the steps necessary to achieve compliance via a timeline or schedule and designate an official responsible to maintain and update the document. The document is a requirement of the Americans with Disabilities Act and shall be made current and available for public inspection.

Activity Score

An Activity Score is a rating that summarizes a feature's (sidewalk (including gaps), curb ramp, pedestrian signal or bus stop) expected frequency of use and its impact on individuals with disabilities in the Public Rights-of-Way. A rating is assigned to a feature based on that feature's location in proximity to several categories.

In total, the Activity Score is scored on a scale of 0 to 100, with 0 being the lowest activity, and 100 being the highest activity. An Activity Score of 0 indicates that the feature is not expected to see any use by pedestrians based on its location. An Activity Score of 100 indicates that the feature is expected to see significant use by pedestrians due to its location.

The following categories are used to rate an Activity Score for each feature in the Public Rights-of-Way:

Table 1: Activity Score Category Breakdown

Category	Sub-Category	Specifications	Weight	Value	Score
Streets	Arterial	Adjacent Arterial Street	10	100%	10
	Collector	Adjacent Collector Street		50%	5
Transit Stops	All forms of Public Transit	Within 1/4 Mile of a Transit Stop	10	100%	15
Schools	Elementary School (Primary Education)	Within 1/4 Mile of Primary Education	12	100%	12
Parks	All Parks within the City	Within 1/4 Mile of a Park	10	100%	0
City Attractors	City-Owned Buildings	Within 1/4 Mile of City Buildings	12	50%	18
Pedestrian Generators	Medical or Social Services	Within 1/4 Mile of Medical or Social Services	12	50%	18
Population Density*	Population per Square Mile in each Census Block, as delineated by the U.S. Census.	No Population	12	0%	0
		> 0%-30%		30%	4
	*Categorized in GIS according to 4 Manual Intervals of 0%, 30%, 60%, and 100%	> 30%-60%		60%	8
		> 60%-100%		100%	12
Senior Population Density*	Population Age 65 and Older per Square Mile in each Census Block, as delineated by the U.S. Census.	No Population	12	0%	0
		> 0%-30%		30%	4
	*Categorized in GIS according to 4 Manual Intervals of 0%, 30%, 60%, and 100%	> 30%-60%		60%	8
		> 60%-100%		100%	12
No Sidewalk	Adjacent to an Incorporated Street without Sidewalks	A sidewalk, curb ramp, or pedestrian signals that is adjacent to a street without sidewalks.	10	100%	15
		Total Weight	**100**		

Barrier Score

A Barrier Score is a rating assigned to a feature (sidewalk (including gaps), curb ramp, pedestrian signal, or bus stops) in the Public Rights-of-Way based on the severity of the feature's existing conditions in comparison to current State and Federal Standards.

In total, the Barrier Score is scored on a scale of 0 to 100, with 0 being a feature that is compliant with current State and Federal Standards, and 100 indicating that the feature is completely noncompliant. All gaps along sidewalks and curb ramps that are required to be installed where there are none currently will be given a score of 100 to classify that they are the highest priority.

Categories used to rate a Barrier Score for each feature in the Public Rights-of-Way are specific to the feature being surveyed (sidewalk (including gaps), curb ramp, pedestrian signal, or bus stops).

The following categories are used to rate a Barrier Score for Sidewalks:

Table 2: Barrier Score Category Breakdown for Sidewalks

Category	Barrier Type	Weight	Quantity**	Value	Score
Heaving/Change in Level	Minor Change in Level (0.26"-0.74")	10	1-2 Incidents	30%	3
			3-5 Incidents	60%	6
			6+ Incidents	100%	10
	Major Change in Level (0.75" or greater)	20	1-2 Incidents	30%	6
			3-5 Incidents	60%	12
			6+ Incidents	100%	20
Cross Slope	Cross Slope Low (2%-5%)	10	10' or less	50%	5
			>10'	100%	10
	Cross Slope Medium (5%-8%)	15	10' or less	50%	7.5
			>10'	100%	15
	Cross Slope High (>8%)	20	10' or less	50%	10
			>10'	100%	20
Run Slope*	Running Slope Low (5%-8%)	2.5	10' or less	50%	1.25
			>10'	100%	2.5
	Running Slope Medium (8%-11%)	5	10' or less	50%	2.5
			>10'	100%	5
	Running Slope High (>11%)	7.5	10' or less	50%	3.75
			>10'	100%	7.5
Obstructions	Obstructions	10	1-2 Incident	50%	5
			3+ Incidents	100%	10
	Total Weight	100			

**Running Slope that matches street grade or less is considered compliant and therefore should receive a score of 0. Any running slope longer than 10 feet is assumed to match the street grade.*

*** Incidents are the barrier count along a run. For slope data it is the length of the category for the run. A run is usually from one intersection to the next, however a run could end mid-block depending on several factors.*

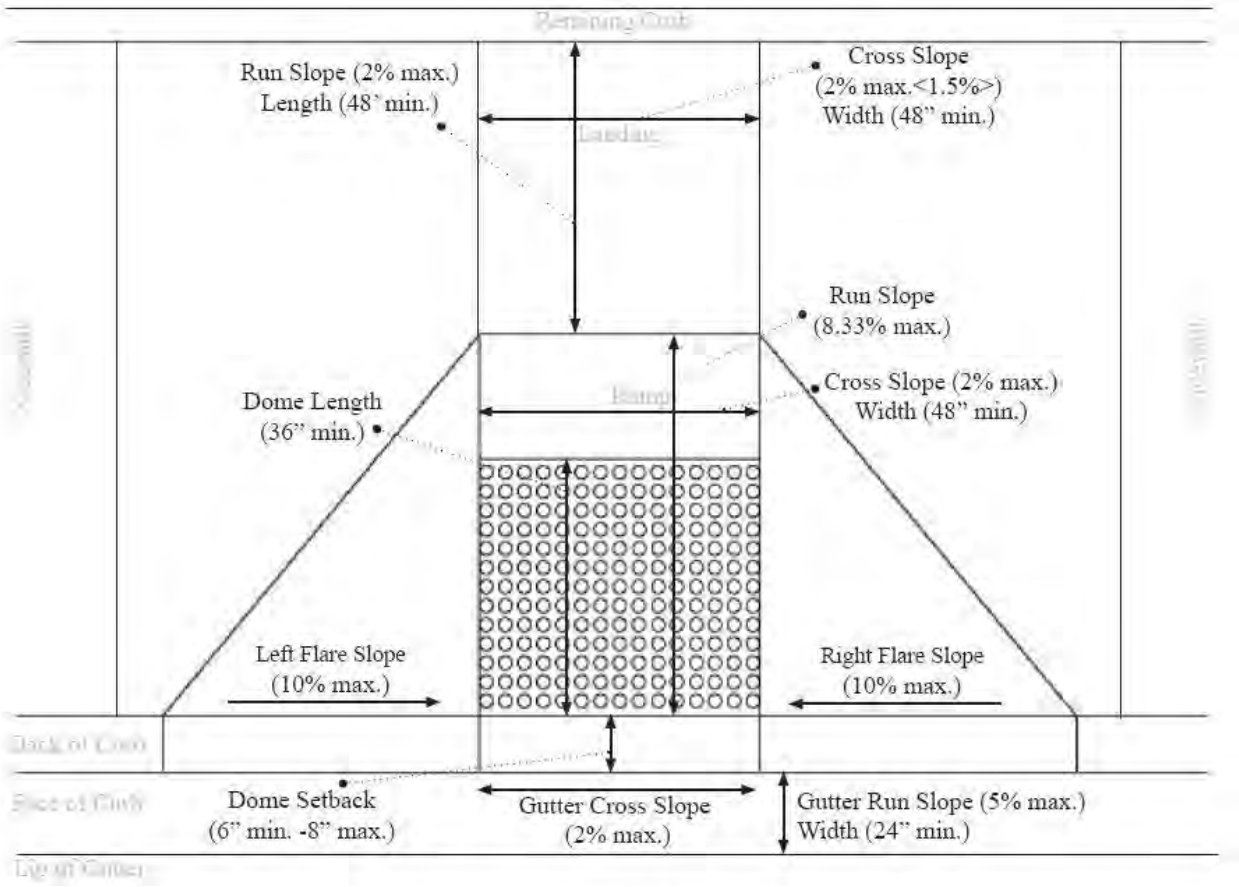

Figure 1: Curb Ramp Measurements Diagram (Perpendicular)

The following categories are used to rate a Barrier Score for Curb Ramps (Perpendicular):

Table 3: Barrier Score Category Breakdown for Curb Ramps (Perpendicular)

Barrier Type	Weight	Category	Value	Score
Width of Ramp	6	≤ 35.9"	100%	6
		36.0" - 41.9"	50%	3
		42.0" - 47.5"	25%	1.5
		≥ 48"	0%	0
Alignment with Marked Crosswalk	2	No	100%	2
		Yes	0%	0
Slope of Ramp	10	≥ 15%	100%	10
		12.5% -14.9%	75%	7.5
		10.0% - 12.4%	50%	5
		8.4% - 9.9%	25%	2.5
		≤ 8.3%	0%	0

Cross Slope of Ramp	10	≥ 7.0%	100%	10
		5.0% - 6.9%	75%	7.5
		2.9% - 4.9%	50%	5
		2.1% - 2.8%	25%	2.5
		≤ 2.0%	0%	0
Top Landing Running Slope	5	≥ 9.0%	100%	5
		5.0% - 8.9%	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Top Landing Cross Slope	10	≥ 9.0%	100%	10
		5.0% - 8.9%	75%	7.5
		2.9% - 4.9%	50%	5
		2.1% - 2.8%	25%	2.5
		≤ 2.0%	0%	0
Flare (Right)	10	≥ 14%	100%	10
		12.1% - 13.9%	60%	6
		10.1% - 12%	40%	4
		≤ 10.0%	0%	0

Barrier Type	**Weight**	**Category**	**Value**	**Score**
Flare (Left)	10	≥ 14%	100%	10
		12.1% - 13.9%	60%	6
		10.1% - 12%	40%	4
		≤ 10.0%	0%	0
Top Landing Length	9	≤ 32.9"	100%	9
		33.0" - 35.9"	75%	6.75
		36.0" - 41.9"	50%	4.5
		42.0" - 47.9"	25%	2.25
		≥ 48"	0%	0
Truncated Domes	4	No	100%	4
		More than 2” each side	60%	2
		Yes	0%	0
Gutter Lip (Transition from Gutter to Ramp)	4	≥ 1"	100%	4
		0.75" - .99"	75%	3
		0.5" - .74"	50%	2

		0.1" - 0.49"	25%	1
		Flush	0%	0
Cross Slope of Gutter	10	≥ 9.0%	100%	10
		5.0% - 8.9%	75%	7.5
		2.9% - 4.9%	50%	5
		2.1% - 2.8%	25%	2.5
		≤ 2.0%	0%	0
Gutter Slope	10	≥ 9.0%	100%	10
		6.7% - 8.9%	75%	7.5
		5.4% - 6.6%	50%	5
		5.1% - 5.3%	25%	2.5
		≤ 5.0%	0%	0
Total Weight	**100**			

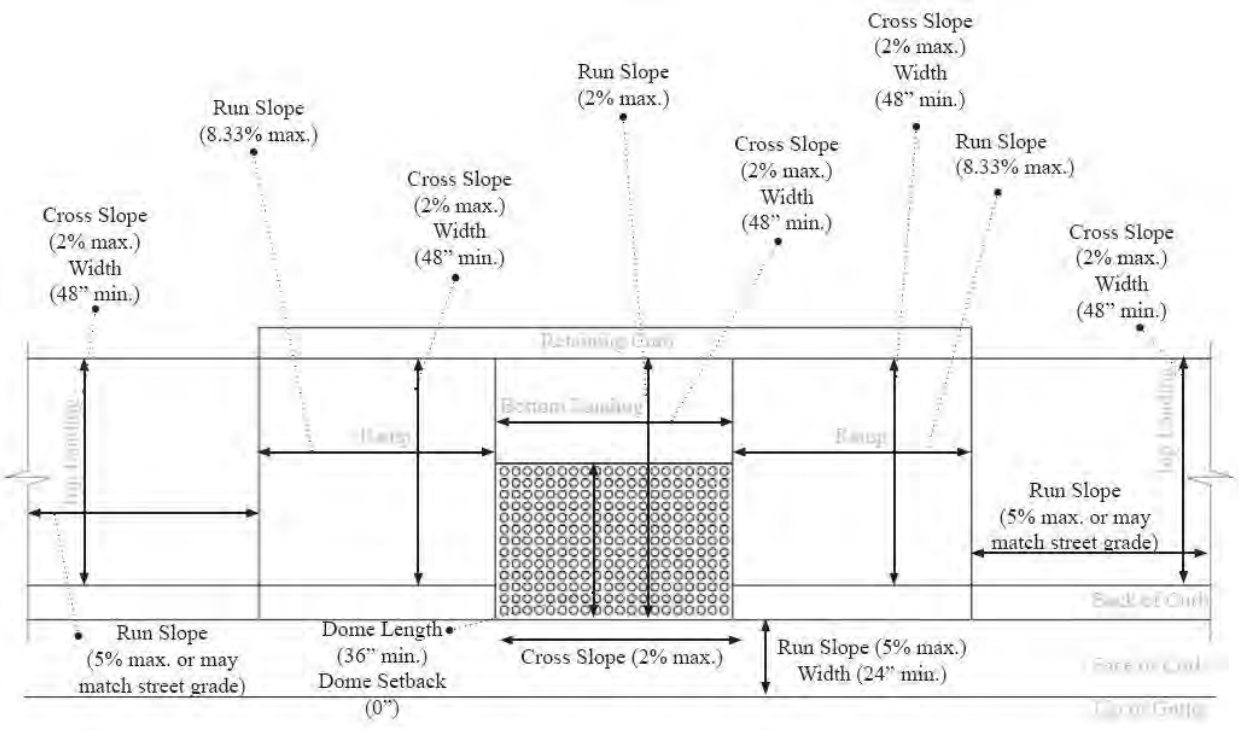

Figure 2: Curb Ramp Measurements Diagram (Parallel)

The following categories are used to rate a Barrier Score for Curb Ramps (Parallel):

Table 4: Barrier Score Category Breakdown for Curb Ramps (Parallel)

Barrier Type	Weight	Category	Value	Score
Width of Ramp (Right)	6	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Width of Ramp (Left)	6	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Alignment with Marked Crosswalk	5	No	100%	5
		Yes	0%	0
Slope of Ramp (Right)	6	≥ 15%	100%	6
		12.5% -14.9%	75%	4.5
		10.0% - 12.4%	50%	3
		8.4% - 9.9%	25%	1.5
		≤ 8.3%	0%	0
Slope of Ramp (Left)	6	≥ 15%	100%	6
		12.5% -14.9%	75%	4.5
		10.0% - 12.4%	50%	3
		8.4% - 9.9%	25%	1.5
		≤ 8.3%	0%	0
Cross Slope of Ramp (Right)	6	≥ 7.0%	100%	6
		5.0% - 6.9%	75%	4.5
		2.9% - 4.9%	60%	3.6
		2.1% - 2.8%	30%	1.8
		≤ 2.0%	0%	0
Cross Slope of Ramp (Left)	6	≥ 7.0%	100%	6
		5.0% - 6.9%	75%	4.5
		2.9% - 4.9%	60%	3.6
		2.1% - 2.8%	30%	1.8
		≤ 2.0%	0%	0

Barrier Type	Weight	Category	Value	Score
Top Landing Running Slope (Right)*	4	≥ 9.0%	100%	4
		5.0% - 8.9%	75%	3
		2.9% - 4.9%	50%	2
		2.1% - 2.8%	25%	1
		≤ 2.0%	0%	0
Top Landing Running Slope (Left)*	4	≥ 9.0%	100%	4
		5.0% - 8.9%	75%	3
		2.9% - 4.9%	50%	2
		2.1% - 2.8%	25%	1
		≤ 2.0%	0%	0
Top Landing Cross Slope (Right)	5	≥ 9.0%	100%	5
		5.0% - 8.9	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Top Landing Cross Slope (Left)	5	≥ 9.0%	100%	5
		5.0% - 8.9	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Truncated Domes	5	No	100%	5
		More than 2” each side	60%	3
		Yes	0%	0
Gutter Lip (Transition from Gutter to Ramp)	6	≥ 1"	100%	6
		0.75" - .99"	75%	4.5
		0.5" - .74"	50%	3
		0" - 0.49"	25%	1.5
		Flush	0%	0
Cross Slope of Gutter	6	≥ 9.0%	100%	6
		5.0% - 8.9%	75%	4.5
		2.9% - 4.9%	50%	3
		2.1% - 2.8%	25%	1.5
		≤ 2.0%	0%	0

Barrier Type	Weight	Category	Value	Score
Gutter Slope	6	≥ 9.0%	100%	6
		6.7% - 8.9%	75%	4.5
		5.4% - 6.6%	50%	3
		5.1% - 5.3%	25%	1.5
		≤ 5.0%	0%	0
Bottom Landing Cross Slope	6	>9.0%	100%	6
		5.0% - 8.9%	75%	4.5
		2.9% - 4.9%	50%	3
		2.1% - 2.8%	25%	1.5
		≤ 2.0%	0%	0
Bottom Landing Slope	6	≥ 9.0%	100%	6
		5.0% - 8.9%	75%	4.5
		2.9% - 4.9%	50%	3
		2.1% - 2.8%	25%	1.5
		≤ 2.0%	0%	0
Bottom Landing Length	6	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Total Weight	**100**			

**Top Landing Running Slope that matches or is less than the street grade is considered compliant and therefore should receive a score of 0.*

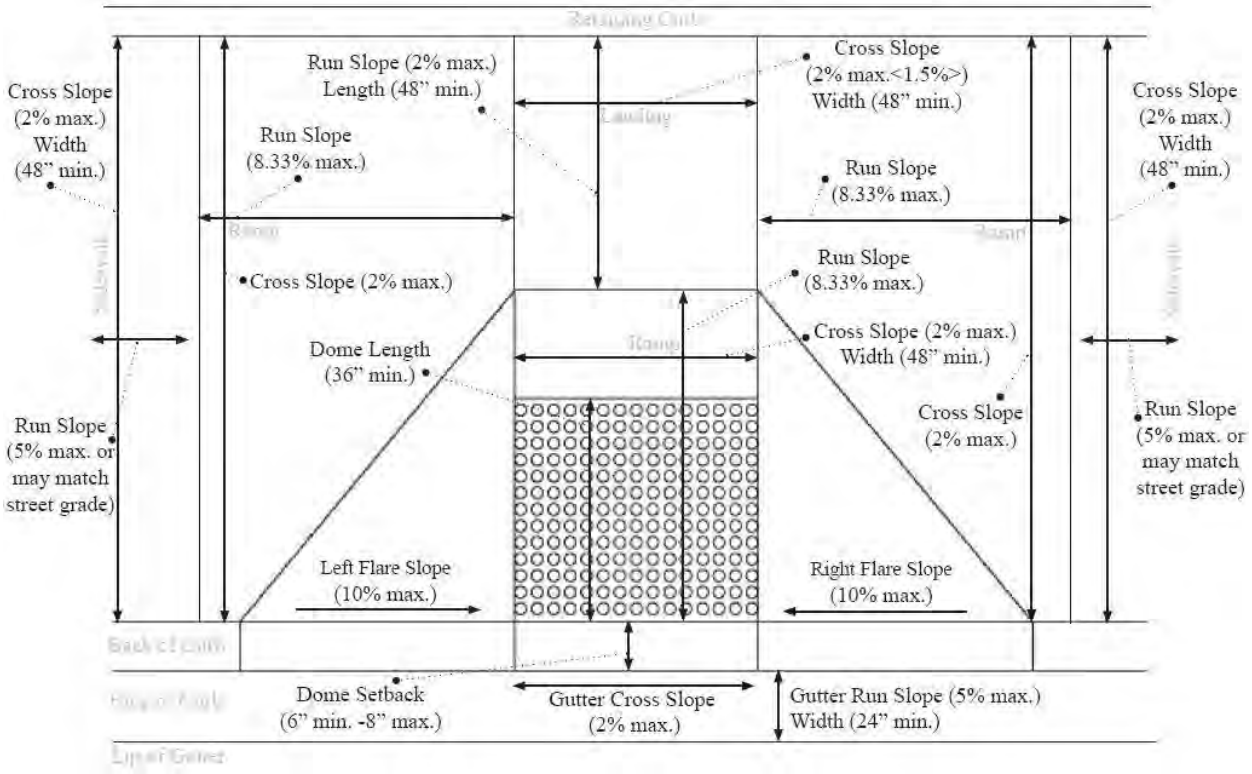

Figure 3: Curb Ramp Measurements Diagram (Combination)

The following categories are used to rate a Barrier Score for Curb Ramps (Combination):

Table 5: Barrier Score Category Breakdown for Curb Ramps (Combination)

Barrier Type	Weight	Category	Value	Score
Width of Ramp (Right)	6	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Width of Ramp (Left)	6	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Alignment with Marked Crosswalk	5	No	100%	5
		Yes	0%	0

Barrier Type	Weight	Category	Value	Score
Slope of Ramp (Right)	5	≥ 15%	100%	5
		12.5% -14.9%	75%	3.75
		10.0% - 12.4%	50%	2.5
		8.4% - 9.9%	25%	1.25
		≤ 8.3%	0%	0
Slope of Ramp (Left)	5	≥ 15%	100%	5
		12.5% -14.9%	75%	3.75
		10.0% - 12.4%	50%	2.5
		8.4% - 9.9%	25%	1.25
		≤ 8.3%	0%	0
Slope of Ramp (Combination)	5	≥ 15%	100%	5
		12.5% -14.9%	75%	3.75
		10.0% - 12.4%	50%	2.5
		8.4% - 9.9%	25%	1.25
		≤ 8.3%	0%	0
Cross Slope of Ramp (Right)	5	≥ 7.0%	100%	5
		5.0% - 6.9%	75%	3.75
		2.9% - 4.9%	60%	2.5
		2.1% - 2.8%	30%	1.25
		≤ 2.0%	0%	0
Cross Slope of Ramp (Left)	5	≥ 7.0%	100%	5
		5.0% - 6.9%	75%	3.75
		2.9% - 4.9%	60%	2.5
		2.1% - 2.8%	30%	1.25
		≤ 2.0%	0%	0
Cross Slope of Ramp (Combination)	5	≥ 7.0%	100%	5
		5.0% - 6.9%	75%	3.75
		2.9% - 4.9%	60%	2.5
		2.1% - 2.8%	30%	1.25
		≤ 2.0%	0%	0
Top Landing Running Slope (Right)*	4	≥ 9.0%	100%	4
		5.0% - 8.9%	75%	3
		2.9% - 4.9%	50%	2
		2.1% - 2.8%	25%	1
		≤ 2.0%	0%	0
Top Landing Running Slope (Left)*	4	≥ 9.0%	100%	4
		5.0% - 8.9%	75%	3
		2.9% - 4.9%	50%	2

Barrier Type	Weight	Category	Value	Score
		2.1% - 2.8%	25%	1
		≤ 2.0%	0%	0
Top Landing Cross Slope (Right)	5	≥ 9.0%	100%	5
		5.0% - 8.9	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Top Landing Cross Slope (Left)	5	≥ 9.0%	100%	5
		5.0% - 8.9	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Truncated Domes	5	No	100%	5
		More than 2” each side	60%	3
		Yes	0%	0
Gutter Lip (Transition from Gutter to Ramp)	5	≥ 1"	100%	5
		0.75" - .99"	75%	3.75
		0.5" - .74"	50%	2.5
		0" - 0.49"	25%	1.25
		Flush	0%	0
Cross Slope of Gutter	5	≥ 9.0%	100%	5
		5.0% - 8.9%	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Gutter Slope	5	≥ 9.0%	100%	5
		6.7% - 8.9%	75%	3.75
		5.4% - 6.6%	50%	2.5
		5.1% - 5.3%	25%	1.25
		≤ 5.0%	0%	0
Bottom Landing Cross Slope	5	>9.0%	100%	5
		5.0% - 8.9%	75%	3.75
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Bottom Landing Slope	5	≥ 9.0%	100%	5
		5.0% - 8.9%	75%	3.75

Barrier Type	Weight	Category	Value	Score
		2.9% - 4.9%	50%	2.5
		2.1% - 2.8%	25%	1.25
		≤ 2.0%	0%	0
Bottom Landing Length	5	≤ 32.9"	100%	6
		33" - 35.9"	75%	4.5
		36.0" - 41.9"	50%	3
		42.0" - 47.9"	25%	1.5
		≥ 48"	0%	0
Total Weight	**100**			

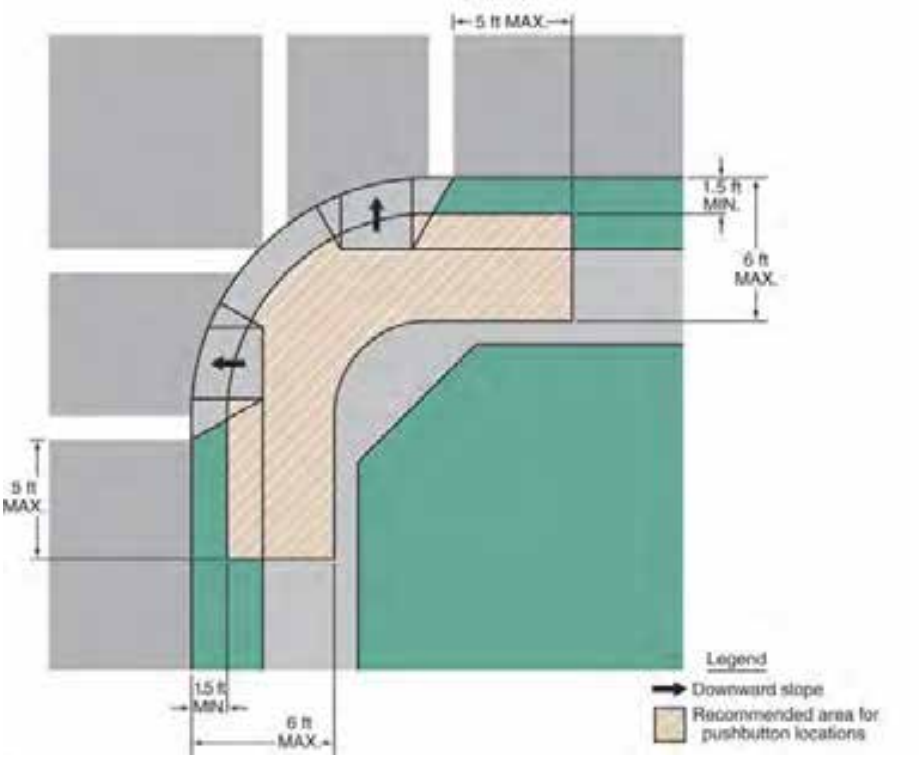

Figure 4: Pedestrian Signal Location Diagram

Figure 5: Pedestrian Signal Pole Diagram (Image Obtained from Google)

The following categories are used to rate a Barrier Score for Pedestrian Signals.

Table 6: Barrier Score Category Breakdown for Pedestrian Signals

Barrier Type	Weight	Category	Value	Score
Clear Floor Slope	6.5	≤ 2.0%	0%	0
		2.1% - 3.9%	25%	1.625
		4.0% - 6.9%	50%	3.25
		7.0% - 9.9%	75%	4.875
		≥ 10.0%	100%	6.5
Clear Floor Cross Slope	6.5	≤ 2.0%	0%	0
		2.1% - 3.9%	25%	1.625
		4.0% - 6.9%	50%	3.25
		7.0% - 9.9%	75%	4.875
		≥ 10.0%	100%	6.5
Button Height (from ground to center of button)	6.5	> 58.1"	100%	6.5
		< 42"	50%	3.25
		48.1" - 58"	50%	3.25
		42" - 48"	0%	0
Button Reach (from Clear Floor Space)	6.5	>25.01"	100%	6.5
		20.01" - 25"	75%	4.875

Barrier Type	Weight	Category	Value	Score
		15.01" - 20"	50%	3.25
		10.01" - 15"	25%	1.625
		< 10"	0%	0
Button Pressure (force required to push button)	6.5	≥ 10 lbs	100%	6.5
		6 lbs - 9 lbs	50%	3.25
		≤ 5 lbs	0%	0
Button Diameter	6.5	≤ 0.5"	100%	6.5
		1.9" - 0.6"	50%	3.25
		≥ 2"	0%	0
Accessible Path (to button)	6.5	No	100%	6.5
		Yes	0%	0
Clear Floor Space (30"x 40" area adjacent to button)	9	No	100%	9
		Yes	0%	0
Closed Fist Operation (able to push button with more than just a finger)	6.5	No	100%	6.5
		Yes	0%	0
Button Visual Contrast (light on dark background)	6.5	No	100%	6.5
		Yes	0%	0
Button Vibrotactile (button vibrates)	6.5	No	100%	6.5
		Yes	0%	0
Audible Walk Indicator	6.5	No	100%	6.5
		Speech	0%	0
		Chirp	0%	0
		Audible Tone	0%	0
Button Locator Tone	6.5	No	100%	6.5
		Yes	0%	0
Tactile Directional Arrow	6.5	No	100%	6.5
		Not Tactile	50%	3.25
		Yes	0%	0
Within 5 ft from Crosswalk	3	NO	100%	3
		YES	0%	0
1.5 - 6.0 ft from Curbline	2.5	NO	100%	2.5
		YES	0%	0
10 ft Minimum Separation between Buttons	1	<10ft	100%	1
		>10ft or N/A	0%	0
Total Weight	**100**			

Priority Score

The Priority Score is a summation of both a feature's Activity Score and Barrier Score and is used as a criterion in planning out schedules for the order of barrier mitigation work.

Activity Score + Barrier Score = Priority Score

The Priority Score is rated on a scale of 0 to 200, with 0 being a feature that should have no priority for barrier mitigation work and 200 being a feature which should be at the forefront of any planned barrier mitigation work that uses funds dedicated solely for mitigating accessibility barriers identified in an ADA Transition Plan.

The Priority Score is designed to be equal in scale across the four primary features surveyed in the PROW (sidewalks, curb ramps, pedestrian signals, and bus stops), i.e. a Priority Score of 200 given to a curb ramp is equal to a Priority Score of 200 given to a sidewalk.

Note that the Priority Score serves as only one methodology for creating a schedule. Other methods and criteria can be used (and is encouraged) as the basis for forming a schedule including: 1) barriers identified by constituents through a special request, 2) barriers that overlap with a project already funded and scheduled, 3) barriers that can be resolved internally with maintenance staff, 4) grouping work geographically for cost efficiency, 5) etc.

Documentation for any additional methodology should be kept on record for justifying a barrier mitigation schedule.

APPENDIX G: PRIORITIZATION CRITERIA FOR BARRIER MITIGATION – FACILITIES

City of Madera

Appendix G: Prioritization Criteria

Barrier Mitigation - Facilities

May 2024
SSA Project # 20029

NORTHERN CALIFORNIA
100 BUSH STREET, SUITE 1425, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.514.4771

APPENDIX G: PRIORITIZATION CRITERIA FOR BARRIER MITIGATION – FACILITIES

Table of Contents

i. **Definitions**

ii. **Priority Score**
Table 1: Priority Score Breakdown

iii. **Severity Score**

Definitions

Access Compliance Survey – Process taken to fulfill the requirements of a Transition Plan, by surveying and identifying physical barriers which impede accessibility to a program or service provided to the public.

Curb Ramp – A ramp graded down from the top surface of a sidewalk to the surface of an adjoining street to provide connectivity within the Public Rights-of-Way.

Facility – A place housing a program or service for the public.

Feature – An element provided in the Public Rights-of-Way, including public sidewalks and streets, crosswalks, curb ramps, street furnishings, pedestrian signals, parking, etc. The four main features surveyed are 1) sidewalks, 2) curb ramps, 3) pedestrian signals, and 4) bus stops

Pedestrian Signal – Devices used at signalized intersections to notify pedestrians when it is safe to cross the street.

PROW – *Refer to definition of "Public Rights-of-Way (PROW)"*

Public Rights-of-Way (PROW) – Public infrastructure such as streets, roads, or walkways under the responsibility or authority of a public entity, such as a City or County.

Self-Evaluation – A review of a public entity's policies, procedures, and practices in meeting the programmatic requirements of Title II of the Americans with Disabilities Act. The findings of the review and the modifications made as a result must be compiled and shall be made available for public inspection.

Title I – Regulations from the Americans with Disabilities Act specific to employment.

Title II – Regulations from the Americans with Disabilities Act specific to State and local government entities, including City and County governments.

Title III – Regulations from the Americans with Disabilities Act specific to areas of public accommodations and commercial facilities.

Transition Plan - A living document that inventories the physical barriers identified which impede accessibility to a public entity's programs and services. The document will identify solutions to mitigate the barriers and set forth the steps necessary to achieve compliance via a timeline or schedule, and designate an official responsible to maintain and update the document. The document is a requirement of the Americans with Disabilities Act and shall be made current and available for public inspection.

Priority Score

A Priority Score is a rating that rates the relative importance of addressing a barrier according to its impact upon the disabled population. The score considers the expected frequency of use and frequency of contact that the barrier will have with the public based on its location within a facility and where the public have access to.

The Priority Score is rated on a score ranging from 1 to 4, 1 being the highest priority, which are barriers that are expected to be in contact with the public consistently, and 4 being the lowest priority, which are barriers with minimal contact by the public. The scoring for the Priority Score is based on the following:

Table 1: Priority Score Breakdown

Priority 1	**Areas of basic public access**
	Accessible routes from site entry points to an accessible building entrance of the program location (EX. walks, ramps, accessible parking spaces, curb ramps, crosswalks at vehicular ways, passenger loading zones, etc.)
	Accessible route from accessible building entrances to “first contact points” (EX. information counters, public lobbies, elevators)
Priority 2	**Access to critical spaces of program function**
	(EX. Classrooms, assembly areas, meeting rooms, public offices, etc.)
Priority 3	**Access to public common areas that support program functions**
	(EX. Restrooms, drinking fountains, public telephones, etc.)
Priority 4	**Staff only areas not expected to be accessed by the public**

Severity Score

A Severity Score is a rating of the degree of deviation that the existing barrier has in comparison to applicable standards and the reparability of mitigating the barrier.

The Severity Score is rated on a score ranging from 1 to 4, 1 being the highest severity, and 4 being the lowest severity. Severity Scores are assigned on a case-by-case basis depending on the type of barrier and the most cost-effective solution to mitigate the barrier.

APPENDIX H: PUBLIC COMMENTS

City of Madera

Appendix H: Public Comments

May 2024
SSA Project # 20029

NORTHERN CALIFORNIA
100 BUSH STREET, SUITE 1625, SAN FRANCISCO, CA 94104
T 415.445.3045

SOUTHERN CALIFORNIA
2600 WEST OLIVE AVENUE, 5TH FLOOR, BURBANK, CA 91505
T 310.571.2568

800.514.4771
WWW.SCIANALYSIS.COM

June 18, 2024

City of Madera Self-Evaluation and Transition Plan Public Input Meeting

In-person attendees:

DJ Becker, ADA Advisory Council Chairperson

Cynthia Ortegón, ADA Advisory Council Member

Dianna Robbins, ADA Advisory Council Member

Jack Porter, ADA Advisory Council Member

Carlos Guerrera, member of the public

Derek Robinson, member of the public

Ismael Hernandez, City of Madera Public Works

Nicki Rincon, City of Madera Parks & Community Services

Giachino Chiaramonte, City of Madera Police Department

Joseph Hebert, City of Madera Parks & Community Services

Mike Lima, City of Madera Finance Department

Will Tackett, City of Madera Community Development

Keith Helmuth, City of Madera Engineering

Wendy Silva, City of Madera Human Resources

Erica Gaitan, City of Madera Human Resources

Zoom attendees:

Sally Swanson Architects

Sally Swanson, CEO

Chris Sircello –Facilities Specialist

Sergio Valencia – GIS & Database Specialist

Tina Dorius –ADA Policy Specialist

Mattie Mendez, Community Action Partnership of Madera County

Graciela Valdez, Madera County Public Health

Correena Lipira, Madera County Public Health

Questions, Answers, and Feedback

DJ Becker

One of the big things is how do we proceed with this in a rational fashion and engage the public? I mean, obviously, we know the areas of concern in our city. How do we distill your data, which is voluminous, into kind of like a checklist or summary to prioritize and improve it, to spend our money wisely and for the benefit of pedestrian safety.

Sally Swanson

I think the first thing you have got to do is how much money do you have? So you must look at your budget and you must see how much money you have in your plan and what you can do with this.

And we've scored the barriers so that you would know what are the most important barriers that we explain. So you would take those and implement them.

What other budget do you have, but you first must decide how much money you have and how you're going to implement this and that might take 10 years, it might take a long time.

But you must really address the issues that are most important that were noted first.

If you're in need of more help, if you're in need of a spreadsheet that makes it very easy to simplify it, we've done that before, and we'll certainly give that to you, and we can work with you to prioritize within this spreadsheet what you must tackle first.

So we can take this big chunk of information and bring it to something very simple.

DJ Becker

But for this document to get implemented or get evaluated or to get maximum resident participation with, we need to simplify it a little bit, and kind of help residents understand, and prioritize it. And we've heard mostly that we've got unsafe curbs, unsafe, you know, curb uplift, you know, it's not complicated stuff. So do we have any ideas and suggestions. Cynthia, you had some thoughts on this.

Cynthia Ortegón

Yeah, because we had a Self-Evaluation plan done in 2010, I believe. And from then till now, we haven't really, we've done as best we can with the money that the city has and has put into it. But now we're 10 years later, and we still have a lot to do. So we'd like to just be able to basically put out a, for our education, we want to know what the priorities are. And we can do that with the database. I understand that we can look at it. It's a large document. The other one was printable. This one is huge, but if as long as the searchable, that's great.

Sally Swanson

Okay, so that's a question. Is it searchable?

Tina Dorius

Yes, they are. And we can give training, if that's helpful, on how to easily search the databases. I think you have the choice of either using the Excel spreadsheets or using BlueDag, the software for facilities, and BlueDag is exceptionally user-friendly.

DJ Becker

So drop a pin, drop a pin in a map type thing.

Tina Dorius

That might be GIS, I'm not sure. BlueDag, I know it's just you can, like let's say you guys fix a curb ramp or you fix a deficiency in a facility, you can mark it in the software, and it'll update for everybody and there's just a living record of it. So it keeps track of everything for now. if you have any, you know, staff changes, it's okay because again, that database is going to house everything.

Sally Swanson

If you're saying we could give you a spreadsheet, we could also give you training.

Tina Dorius

Yes, we'd like to train you. Additionally, Sally, I think getting public feedback and public input on where this plan should start is crucial. So I think, you know, really getting the public involved, finding out what are the top priorities for the public and putting that into consideration along with the way our rankings and priorities.

DJ Becker

And we just want to make this accessible for the majority of our residents because this is going to be a great resource behind Wendy's desk or online. But we have to be able to bridge the gap for the average resident, say, hey, we really are working on these things. So I don't know, maybe surveys, email, absolutely. We have a gap where people can, you know, right now they just call me or Cynthia, or, you know, and there's things that get lost in that translation. We need a better way for citizens and residents to express their concerns that I think is a top priority and to put it into layman's language where it's accessible and understandable.

What about a survey? Wendy, can we go out with a survey for residents or what do you suggest? How do we get the residents involved? And now that we have the data, how do we interface with the residents?

Sally Swanson

Could we use your website? Could we use flyers? Could we just have three or four sentences? A new issue every week?

Could we make it simple? We've done a lot on websites and maybe just making that an avenue. Maybe you would just have a check sheet that you have in the desks as people enter the city hall.

DJ Becker

Something very simple.

Sally Swanson

Do you want to hold a Zoom meeting with Zoom meeting with residents? Make it a date? We're going to have a Zoom meeting and talk about this and spread it in your website on the newspaper. Put a big sign in front of your building. You know, just really get the word out.

DJ Becker

Yeah.

Sally Swanson

We're available certainly to do that.

Frank Porter

I'd also like to know how much it costs for this survey to be put together. How much the City has already spent.

DJ Becker

So, Jack, what was your question? It's a legal requirement. So what's that? Yeah. the cost, the contract is a flat fee agreement for the services. We agreed not to exceed two hundred forty-four thousand five hundred fifty dollars. And that's paid as progress is made on the project.

DJ Becker

All right. Well, we have a gap to bridge there because we get a lot of verbal feedback, but it's not always translatable into what we need. So but we're pleased to have the evaluation. We know where to start. Um, what's the what's the summary process for you? What have you identified as our top priorities?

Chris Sircello

Well, I think you asked about some of the dangerous conditions. And so I do have something to comment on that.

We already talked about level changes, tripping hazards, and as well as those barriers to access like headroom issues, or protruding objects.

You'll find that term in there. I consider those to be dangerous conditions. If they protrude from the wall more than four inches, between 27 inches and 80 inches, they're considered dangerous and are protruding objects. It's a hazard. I would get rid of those thresholds that are too high, but another tripping hazard, just like a level change. So you come into a door, you've got a one and a quarter inch threshold there, definitely a dangerous condition as well as something that would be difficult to navigate in the wheelchair, let's say, or somebody just visually impaired.

Let's see, other dangerous conditions. You could even have a dangerous condition from something like a ramp that was just way too steep, let's say 12, 13% sloped ramp and you know, all of a sudden you get a runaway wheelchair on that. That's a pretty dangerous condition. Let me see here.

I'm trying to think of some more dangerous conditions, the lack of tactile exit signs, that could be dangerous if somebody really needs to find an exit in an emergency, those are the ones that come to mind right now.

DJ Becker

How about door loads? We have some doors that are so heavy that they're very, very difficult for a senior with a walk or any possible for somebody in a wheelchair or a power chair.

So that's something that comes to the top of my memory list, that's something I get chatted up about quite often.

Chris Sircello

Yeah, absolutely.

DJ Becker

We have several sidewalks with three to four-inch rises because of trees. Absolutely. Yeah, you hit them with a walker, you did it.

Correct pavement, no transitions from concrete to dirt. mean, it's very sidewalks, sidewalks that go into landscapes and don't come out.

Right. Yeah, so we kind of know where our area is, but that said, Public Works has been doing an awesome job with some block grant money filling in sidewalks and tearing out the old fixing uplift.

So we're limited in finances, so we're trying to prioritize. And I think this is our opportunity to really put our heads together and try to come up with some type of reasonable input and prioritize.

But I guess we need to work with you to figure out where we can best spend our money. And once we find out how much we have, and we're not concerned about the smaller things, we've got some really glaring deficiencies here now that are a safety hazard.

Well, we have the advisory committee, so we'll find the priorities and then advise them what we feel is going to be the best for the city and the citizens.

I think that'll work good as a team. We just have to get the priorities in a workable form for us to see and for the city council and the rest of the staff to see that we're really going to do this.

We're going to implement it based on what we have and the time and the management and the money and get the jobs done as quickly and as safely as we can.

Matty Menendez

One area I would suggest the report be shared is in the city letter which includes the city notice, the city utility bills.

Derek Robinson

I spent some time at Fresno State and I noticed their sidewalk and they have companies that come and grind down, you know, some of the, know, lift and the cement.

DJ Becker

Yeah, we have a grinder. We bought a grinder, I believe. Okay. And you see, and meantime, the trouble spot, you can put red paint and reflectors, know, get fixed with safety. Yeah, we've been doing that too. Ishmael has been all, and Public Works has been all over that. So, that's been a huge help. And we've had some uplifts as much as four feet up here within a week. been, you probably have more since all this wind. Yeah, well, I haven't checked lately, and I'm sure. four inches. Actually, we had a six-inch uplift on Mainberry, and I mean, I walk every probably every other day out there. I'm like, where would that come from? And it was literally six inches on Mainbury. There's a four inch overruns, Shenore, and that sidewalk that goes around on Riverside. And the other, the other issue, Wendy had a suggestion Ishmael on that reporting app, that, that we're tentatively going to use. There's some software interface or training or something that that's available. If we decide to move forward with that nine or that, what is it? 311. What was the name of that app? reporting app.

Derek

And then another thing is you might have to get rid of some problem trees. They're all over the place.

DJ Becker

So impairing visibility or passage or what? Yeah, some visibility, you know, is over the sidewalk and people not maintaining their landscape. Yeah. Have you reported that anywhere? I've been driving by and was, you know, they can't stop. Yeah. Well, and I tend to say, well, hey, go on the city website and report that. And the comments I get are not kind. So we have a, we have a. A gap between what residents are trying to report and what they expect and, and what's doable for them, I guess, maybe.

Keith.

We actually have a couple of projects.

That's the grant that ultimately built the two buildings at Fifth and C Street. There was. Okay. Yeah, the veterans project. Yeah, there was at least two miles where the sidewalks that were included in that project in that same area.

It will be on Caltrans. We're actually sharing some of the effort on the Caltrans right away. We had a grant. They had the project for the downtown and they were limited on funds. We said we would go ahead and overlap our grant on that project and go ahead and save the money to do some other areas. But yeah, we do have multiple sidewalks. We generally will put like $25,000 in there a year as a placeholder and that will be taken and move to projects. We don't technically go ahead and build $25,000 worth of sidewalks. just do a set aside on that so that we can go ahead and move it wherever we need to at a given time.